

EFFLUENT AND WASTE DISPOSAL SEMI-ANNUAL  
REPORT  
RADIOLOGICAL IMPACT ON MAN  
FOR  
JANUARY - JUNE 1980

VERMONT YANKEE NUCLEAR POWER STATION

8009090 540

TABLE OF CONTENTS

	<u>Page</u>
1.0 INTRODUCTION.....	1
2.0 METEOROLOGICAL DATA.....	2
3.0 RADIOACTIVITY RELEASES.....	3
3.1 Liquid Releases.....	3
3.2 Gaseous Releases.....	3
4.0 DOSE ASSESSMENT.....	4
4.1 Organ Doses to Individuals from Receiving-Water Exposure Pathways.....	4
4.2 Individual Whole-Body and Skin Doses from Noble Gaseous Effluents.....	4
4.3 Organ Doses to Individuals from Radioactive Iodine and Particulates in Gaseous Effluents.....	7
4.4 Whole-Body Doses in Unrestricted Areas from Direct Radiation.....	9
4.5 Whole-Body Doses to the General Population from all Receiving Water Related Pathways.....	10
4.6 Doses to the General Population and Average Individual within Fifty Miles from Gaseous Effluents.....	10
REFERENCES.....	12
FIGURES.....	13
TABLES.....	15
APPENDIX A - SUPPLEMENTAL INFORMATION.....	A1

LIST OF TABLES

<u>Table No.</u>	<u>Title</u>
1A	Gaseous Effluents - Summation of all Releases
1B	Gaseous Effluents - Elevated Releases
1C	Gaseous Effluents - Routine Ground Level Releases
1D	Gaseous Effluents - Non-Routine Releases
2A	Liquid Effluents - Summation of all Releases
3	Solid Waste and Irradiated Fuel Shipments
4-A to 4-H	Vermont Yankee Joint Frequency Distribution January - June, 1980
5-A to 5-H	Vermont Yankee Joint Frequency Distribution April - June, 1980
6	Quarterly Average X/Q and D/Q Values for Selected Receptors
7	Summary of Radiological Impact on Man

VERMONT YANKEE

EFFLUENT AND WASTE DISPOSAL SEMI-ANNUAL REPORT

RADIOLOGICAL IMPACT ON MAN

JANUARY - JUNE, 1980

1.0 INTRODUCTION

Using actual measured effluent and meteorological data for the first half of 1980, this report estimates potential doses from radioactive effluents that could affect individuals and the general population near the Vermont Yankee Nuclear Power Station. Tables 1 through 3 list the recorded radioactive effluents and solid waste for this semi-annual period. Tables 4 and 5 report the cumulative joint frequency distribution of wind speed, wind direction, and atmospheric stability observed during the first half of 1980. Figures 1A and 1B summarize wind speed and direction in a wind rose. Table 6 lists the calculated X/Q and D/Q values at different points of interest based on the meteorological record presented in Tables 4 and 5 for both quarters. Table 7 summarizes the potential radiological dose commitments to individuals and the general population surrounding the plant. Supplemental information concerning the plant's regulatory release limits and the methods used in measuring released radioactivity is given in Appendix A.

All estimates of potential dose for the first half of 1980 were within the dose objectives set forth in Appendix I to 10CFR50. This was accomplished while the plant realized net capacity factors (design MWe) of 91.08 percent and 90.97 percent for the first and second quarters, respectively.

## 2.0 METEOROLOGICAL DATA

Meteorological data was collected during this reporting period from the site's 300 foot meteorology tower located approximately 2200 feet northwest of the reactor building, and about 1,400 feet from the plant stack. The 300 foot tower is approximately the same height as the primary plant stack (94 meters) and is designed to meet the requirements of Regulatory Guide 1.23 for meteorological monitoring.

Implementation of the Central Meteorological System (CMS) was completed during the month of May, 1978. Combined data recoverability for the first and second quarters was 98.7 percent and 100 percent respectively.

X/Q and D/Q values were derived for all receptor points from the site meteorological record for each quarter using a straight-line airflow model. All dispersion and air concentration factors have been calculated employing appropriate source configuration considerations, as described in Regulatory Guide 1.111(1), plus a source depletion model as described in Meteorology and Atomic Energy (1968),<sup>(2)</sup> and deposition velocities as given by Pelletier and Zimbrick<sup>(3)</sup>. Changes in terrain elevations in the site environment were also factored into meteorological models. A full description of the methods used to evaluate air dispersion phenomenon at the plant site is given in Vermont Yankee's 10CFR Part 50, Appendix I evaluation<sup>(4)</sup>.

3.0 RADIOACTIVITY RELEASES

3.1 Liquid Releases

There were no liquid releases of radioactivity from the plant during this semi-annual period.

3.2 Gaseous Releases

All gaseous effluent recorded for the first half of the year are listed in Tables 1A through 1D. All gaseous effluents were recorded as continuous in nature, and were released to the environment via the 94 meter stack located approximately 875 feet north of the Reactor Building. As indicated in Table 1A, all gaseous effluents were well within the plants operating Technical Specification for gaseous releases of radioactivity.

In addition, there were no unplanned or non-routine releases of radioactivity in gaseous effluents during this reporting period.

#### 4.0 DOSE ASSESSMENT

Following the guidance of NUREG-0473(7), nuclides in particulate form which were not detected above the lower limit of detection, (LLD) have been reported as "less than" the LLD and have not been included in the dose calculations. However, the release rate of noble gases from the plant stack, after treatment of the gas stream from the air ejector through the augmented off-gas system, is so low that no noble gases are detectable above the LLD. Therefore, as a conservative approach, it has been assumed for dose calculational purposes that the principal noble gases measured in the off-gas mix at the air ejector are present at the LLD level determined for the plant stack.

##### 4.1 Organ Doses to Individuals from Receiving-Water Exposure Pathways

There were no routine or accidental liquid releases from Vermont Yankee during the first half of 1980. As a result, no receiving water exposure pathways could contribute to any whole-body or organ doses to individuals in unrestricted areas.

##### 4.2 Individual Whole-Body and Skin Doses from Noble Gaseous Effluents

Based on the method of sector averaging discussed in "Meteorology and Atomic Energy - 1968", and utilizing the site meteorological data recorded for this reporting period, the point of maximum off-site ground level air concentration of radioactive materials in gaseous effluents was determined for each quarter. Terrain height in the vicinity of the effluent stack was taken into account in calculating these effluent ground level concentrations. For the first half of 1980, the point of maximum ground

level air concentration was determined to be approximately 2400m WNW of the plant stack. The undepleted X/Q's at this location were calculated to be  $4.1 \times 10^{-7}$  sec/m<sup>3</sup> and  $8.7 \times 10^{-7}$  sec/m<sup>3</sup> for first and second quarters of the year, respectively.

Whole-body and skin doses were calculated at these off-site points as a result of noble gas releases occurring in both quarters. The methodology applied to the dose calculations is consistent with that of Regulatory Guide 1.109(5) for an elevated release point. Dose conversion factors for noble gases and daughters were taken from Table B-1 of this Regulatory Guide. For the beta contribution to the skin dose, a semi-infinite cloud model was used. The whole-body gamma dose was evaluated using a finite cloud sector average model with Gaussian activity distribution in the vertical plane. The gamma radiation received at a point of interest from a differential volume of the cloud is calculated. The radiation is then integrated over the entire cloud, taking into account of the geometry of the cloud, variation in concentration, attenuation by the interaction of photons with matter in the path between source and the receptor point, and scattering of radiation from material outside the direct path to the point of interest. An attenuation factor of 0.7 is also applied to the dose calculations to account for the dose reduction due to shielding which would be provided by a residential structure. No additional credit is taken for decay of radionuclides in transit to the receptor point.

For the first quarter, the skin and whole-body doses from exposure to noble gases at the point of maximum ground level air concentration were calculated to be 0.055 mrem and 0.022 mrem, respectively. For the noble gaseous effluent during the second quarter, the skin and whole-body doses

at the point of max ground level air concentration were calculated to be 0.11 mrem and 0.045 rem, respectively.

In addition, the maximum nearest resident and site boundary whole-body and skin doses have been calculated due to noble gaseous effluents from the plant stack during the reporting period. The maximum whole-body and skin site boundary doses (both approximately 0.08 mrem) for the first quarter of 1980 occurred in the S sector, 0.24 miles from the stack. The second quarter maximum whole-body and skin site boundary doses (both approximately 0.08 mrem) occurred in the S sector 0.24 miles from the stack.

In the first quarter, the maximum skin and whole-body dose to the nearest resident (both approximately 0.056 mrem) in any direction was determined to be in the S sector, 0.33 miles from the plant stack. As a result of the second quarter meteorology and noble gas effluents, the maximum whole-body and skin dose to the nearest resident (both approximately 0.06 mrem) in any sector occurred to the resident 0.33 miles south of the plant stack.

The resultant doses due to noble gas effluents for the maximum site boundary location, maximum nearest resident, and point of maximum ground level air concentration are tabulated in Table 7. All doses are conservative in that they assume 100 percent occupancy at each point. Whole-body doses consider the gamma radiation received from the effluent plume overhead. The skin doses consider both the beta and gamma contributions at the receptor point. All doses from noble gaseous effluents are well below the dose criteria of 10CFR50, Appendix I.

4.3 Organ Doses to Individuals from Radioactive Iodine and Particulates in Gaseous Effluents

The critical pathway of internal exposure to radioactive iodine and particulates, including tritium, resulting from gaseous effluents for the third quarter is through the grass-milk pathway. It is assumed that milk animals are free to graze on open pasture during the second quarter with no supplemental feeding. This assumption is conservative since most of the milk animals inventoried in the site vicinity are fed stored feed throughout the entire year with only limited grazing allowed during the growing season.

During the winter months of the year, the dose commitment through the milk pathway and fresh vegetable ingestion is insignificant. The maximum length of annual growing season is approximately six months long in this part of New England. Therefore, the milk pathway and vegetable ingestion doses for the first quarter are the result of activity deposited on feed and vegetables grown during the growing season and allowed to decay while held in storage. As a result, the critical pathway of exposure for radioactive iodine and particulates during the first quarter is through inhalation.

As a result of the milk and fresh vegetable pathways, the maximum dose for the second quarter from gaseous releases of radioactive iodine and particulates was determined to occur at a farm 1.9 miles WNW of the plant. The critical organ was an infant thyroid with a calculated dose of 0.07 mrem. For the first quarter, with inhalation being the principle pathway of exposure, the maximum organ dose was at a farm SSE 3.5 miles.

The critical organ was a child's thyroid with a calculated dose of 0.0021 mrem. The pathways of exposure which were assumed to exist during the second quarter at this farm include ground plane exposure, inhalation, fresh home grown vegetables and cow's milk. The pathways of exposure considered at the farm during the first quarter include continuous ground plane exposure, inhalation and contributions from stored vegetables and milk.

Table 7 shows the maximum calculated quarterly organ dose due to the combination of exposures from all pathways which have been identified at the farm. Table 7 also shows the calculated organ doses to the highest exposed nearby resident, and potential organ doses to individuals if assumed standing at the highest ground level air concentration point on the site boundary for the entire six-month reporting period. The site boundary doses include only exposure from inhalation, and direct radiation from the ground plane. The nearest resident is assumed to have a vegetable garden during the growing season which contributes to his or her ingestion dose. For all ground plane exposures, the activity is assumed to accumulate on the ground for 15 years at the rate equivalent to that observed during each quarter. This is a simplified method of approximating the average deposition over the life of the plant. The calculated dose from direct exposure to activity on the ground thus represents the dose an individual would see in each quarter if the plant had been operating 15 years. This approach is very conservative, but shows the relative impact the plant would have on the dose commitment over its operating life if the releases were to continue at the levels recorded during this reporting period.

The critical organ, for the second quarter, for the nearest resident with the most exposure was the bone, and for the maximum site boundary

location, was calculated in both quarters to be a child's thyroid. For the nearest residents, in the first quarter, each organ considered was exposed to 0.0013 mrem and for the second quarter, the bone dose was 0.00027 mrem (both at SSE 1.3 miles).

#### 4.4 Whole-Body Doses in Unrestricted Areas from Direct Radiation

The major source of direct radiation (including sky shine) from the station is due to N-16 decay in the turbine building. Because of the orientation of the turbine building on the site, and the shielding effects of the adjacent reactor building, only the seven westerly sectors (SSW - NNW) see any significant direct radiation.

High pressure ionization chamber (HPIC) measurements have been made in the plant area in order to estimate the direct radiation from the station. The chamber was located at a point along the west site boundary which has been determined to receive the maximum direct radiation from the plant. Using measurements of dose rate made while the plant operated at different power levels, from shutdown to 100 percent, the total integrated dose from direct radiation over each three month period was determined by considering the quarterly gross megawatts generated. Field measurements of exposure, in units of Roentgen, were modified by multiplying by 0.6 to obtain whole body dose equivalents, in units of rem, in accordance with recommendations of HASL report 305<sup>(6)</sup> for radiation fields resulting from N-16 photons.

Estimates of the population exposure from direct radiation during the first and second quarters have been made out to two miles. Beyond two miles, the dose from the turbine building is negligible. As a result, the estimated population dose for each of the two quarters respectively was

approximately  $1.9 \times 10^{-2}$  and  $1.9 \times 10^{-2}$  person-rem, for a total population of about 351 persons. The estimated direct radiation dose at the maximum site boundary location was approximately 3.4 mrem for the first quarter of 1980, and 3.5 mrem for the second. These hypothetical individual doses assume a 100 percent occupancy factor, taking no credit for the shielding effect of any residential structure. Table 7 summarizes these results.

#### 4.5 Whole-Body Doses to the General Population from all Receiving Water Related Pathways

There were no routine or accidental liquid releases from Vermont Yankee during the first half of 1980. As a result, no receiving water exposure pathways could contribute to any population dose.

#### 4.6 Doses to the General Population and Average Individual Within Fifty Miles from Gaseous Effluents

Using site meteorological data in Tables 4 and 5, quarterly average X/Q values were determined for each sector formed by placing radial rings from the plant at distances of one, two, three, four, five, ten, twenty, thirty, forty and fifty miles, and their intersection with radial lines drawn to form each of the sixteen principal compass directions. For noble gases, whole-body and skin doses were calculated for each sector and multiplied by the estimated population within each sector to determine the sector person-rem. No credit for decay in transit of activity was assumed.

For the approximately  $1.1 \times 10^6$  people within fifty miles of the plant, the first and second quarter whole-body doses from noble gas cloud exposure were estimated to be 0.77 person-rem and 0.92 person-rem,

respectively. For the same two quarters, the average individual whole-body doses were  $6.7 \times 10^{-4}$  mrem and  $8.0 \times 10^{-4}$  mrem, respectively. The skin doses for the two quarters were 1.5 person-rem and 1.7 person-rem, respectively, and the average individual skin dose was  $1.3 \times 10^{-3}$  and  $1.5 \times 10^{-3}$  mrem, respectively.

Table 7 also indicates the population whole-body and thyroid dose commitments from radioactive iodine and particulates (including tritium) released from the plant in gaseous waste. The pathways of exposure which have been considered for the 50 mile population include inhalation, ingestion of vegetables, milk and meat produced within 50 miles, and the direct exposure to activity deposited on the ground plane. The total whole-body and thyroid dose commitments for the first quarter were calculated to be  $2.3 \times 10^{-2}$  person-rem and  $2.5 \times 10^{-2}$  person-rem respectively. For the second quarter, these doses were  $6.6 \times 10^{-3}$  person-rem and 0.13 person-rem respectively.

REFERENCES

1. Regulatory Guide 1.111, "Methods for Estimating Atmospheric Transport and Dispersion of Gaseous Effluents in Routine Releases from Light-Water-Cooled Reactors", U.S. Nuclear Regulatory Commission, Office of Standards Development, March 1976.
2. Meteorology and Atomic Energy, 1968, Section 5-3.2.2, "Cloud Depletion", pg. 204. U. S. Atomic Energy Commission, July 1968.
3. C. A. Pelletier, and J. D. Zimbrick, "Kinetics of Environmental Radioiodine Transport Through the Milk-Food Chain", Environmental Surveillance in the Vicinity of Nuclear Facilities, Charles D. Thomas Publishers, Springfield, Illinois, 1970.
4. "Supplemental Information for the Purposes of Evaluation of 10CFR Part 50, Appendix I", Vermont Yankee Nuclear Power Corporation, June 2, 1976.
5. Regulatory Guide 1.109, "Calculation of Annual Doses to Man From Routine Release of Reactor Effluents for the Purpose of Evaluating Compliance with 10CFR Part 50, Appendix I", U. S. Nuclear Regulatory Commission, Office of Standards Development, Revision 1, October 1977.
6. W. M. Lowder, P. D. Raft, and G. dePlanque Burke, "Determination of N-16 Gamma Radiation Fields at BWR Nuclear Power Stations", Health and Safety Laboratory, Energy Research & Development Administration, Report No. 305, May 1976.
7. NUREG-0473, "Radiological Effluent Technical Specifications for BWR's", Revision 2, July 1979; Table 4.11-1, notation f.

Figure 1A: Vermont Yankee January-March 1980  
Upper Level Wind Rose

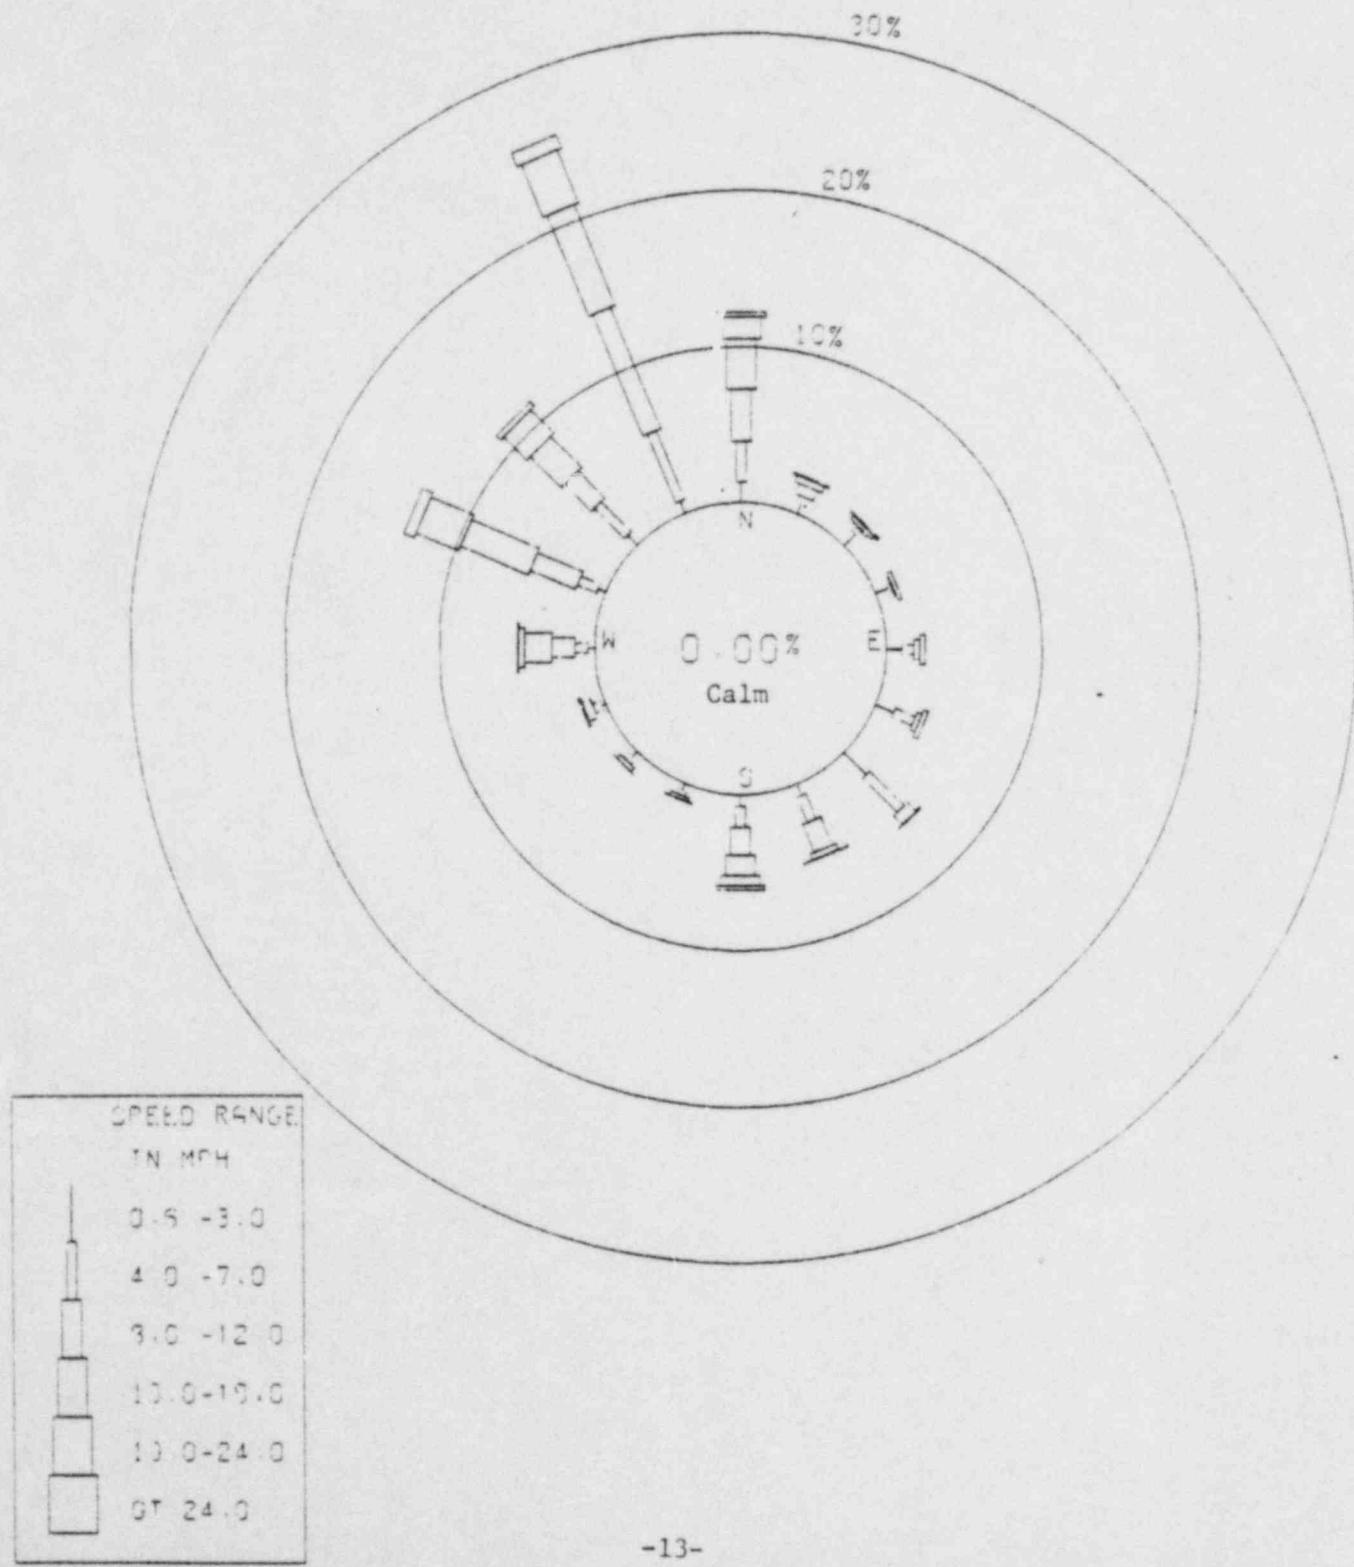


Figure 1B: Vermont Yankee April-June 1980  
Upper Level Wind Rose

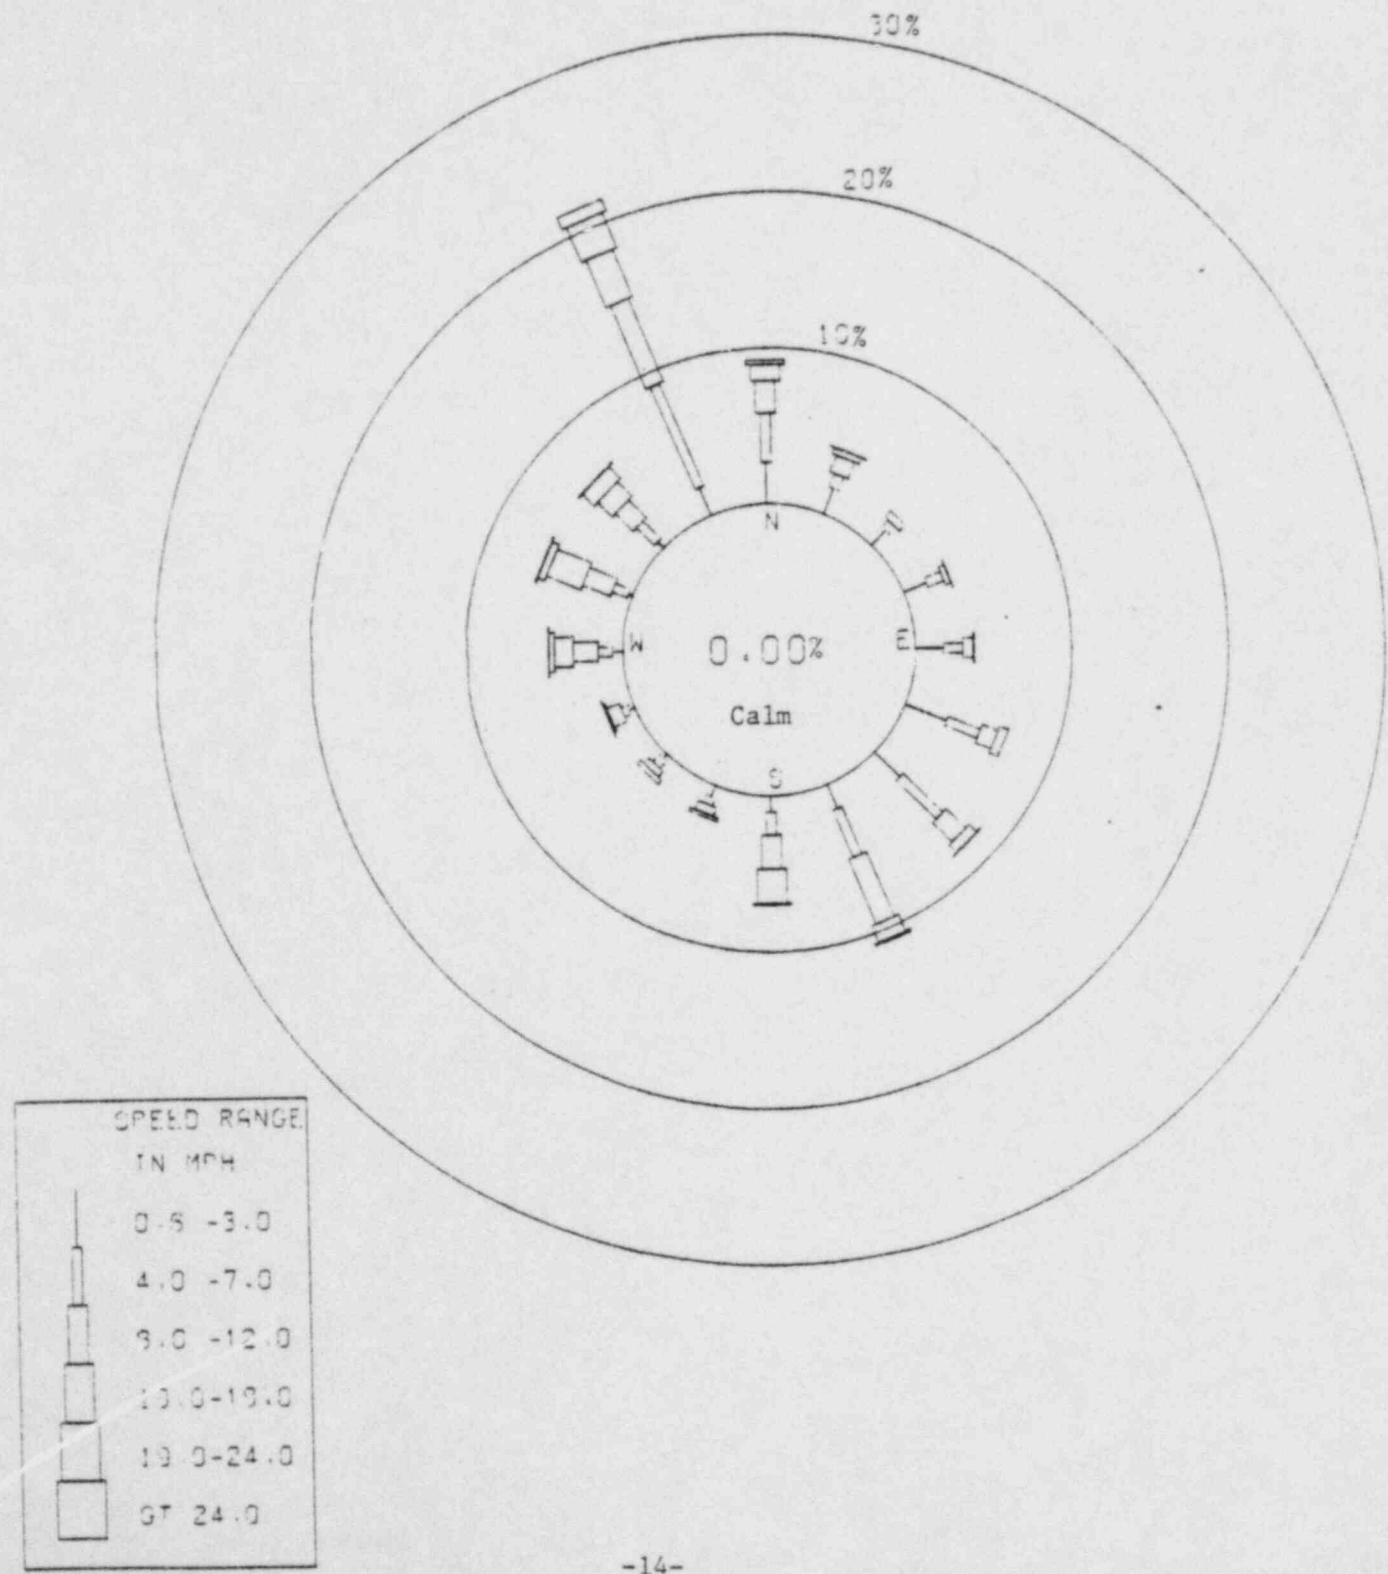


TABLE 1A  
 VERMONT YANKEE  
 EFFLUENT AND WASTE DISPOSAL SEMI ANNUAL REPORT  
 JANUARY - JUNE 1980  
 GASEOUS EFFULENTS - SUMMATION OF ALL RELEASES

	Unit	Quarter 1	Quarter 2	Est. Total Error, %
--	------	-----------	-----------	---------------------

A. Fission & activation gases

1. Total release	Ci	7.89E2	8.45E2	±1.0 E2
2. Average release rate for period	uCi/sec	1.01E2	1.08E2	
3. Percent of technical specification limit	%	1.27E-1	1.19E-1	

B. Iodines

1. Total iodine - 131	Ci	6.64E-4	3.81E-3	±5.0 E1
2. Average release rate for period	uCi/sec	8.45E-5	4.85E-4	
3. Percent of technical specification limit	%	1.76E-2	1.01E-1	

C. Particulates

1. Particulates with half-lives	Ci	2.03E-3	8.88E-4	±5.0 E1
2. Average release rate for period	uCi/sec	2.58E-4	1.12E-4	
3. Percent of technical specification limit	%	8.05E-2	1.50E-2	
4. Gross alpha radioactivity	Ci	8.45E-8	7.82E-8	

D. Tritium

1. Total release	Ci	3.74E0	3.23E0	±5.0 E1
2. Average release rate for period	uCi/sec	4.76E-1	4.10E-1	
3. Percent of technical specification limit	%	N.A.	N.A.	

TABLE 1B

EFFLUENT AND WASTE DISPOSAL SEMIANNUAL REPORT  
 JANUARY - JUNE 1980  
 GASEOUS EFFLUENTS - ELEVATED RELEASE

CONTINUOUS MODE

BATCH MODE \*2

Nuclides Released	Unit	Quarter	Quarter	Quarter	Quarter
-------------------	------	---------	---------	---------	---------

## 1. Fission gases

krypton-85	Ci	*1 E	*1 E	. E	. E
krypton-85m	Ci	4.78E0	1.16E1	. E	. E
krypton-87	Ci	1.52E1	1.93E1	. E	. E
krypton-88	Ci	1.32E1	2.41E1	. E	. E
xenon-133	Ci	7.71E1	1.43E2	. E	. E
xenon-135	Ci	2.34E1	4.38E1	. E	. E
xenon-135m	Ci	1.21E2	1.20E2	. E	. E
xenon-138	Ci	5.43E2	4.84E2	. E	. E
Others (specify)	Ci	. E	. E	. E	. E
	Ci	. E	. E	. E	. E
	Ci	. E	. E	. E	. E
unidentified	Ci	. E	. E	. E	. E
Total for period	Ci	7.98E2	8.45E2	. E	. E

## 2. Iodines

iodine-131	Ci	6.64E-4	3.81E-3	. E	. E
iodine-133	Ci	2.30E-3	2.91E-3	. E	. E
iodine-135	Ci	< 4.67E-2	< 5.14E-3	. E	. E
Total for period	Ci	2.97E-3	6.72E-3	. E	. E

## 3. Particulates

strontium-89	Ci	1.73E-5	8.88E-5	. E	. E
strontium-90	Ci	1.72E-6	9.36E-7	. E	. E
cesium-134	Ci	7.88E-6	2.18E-5	. E	. E
cesium-137	Ci	1.09E-4	7.85E-5	. E	. E
barium-lanthanum-140	Ci	7.38E-5	2.33E-4	. E	. E
cobalt-60	Ci	1.82E-3	3.37E-4	. E	. E
zinc-65	Ci	< 3.01E-4	4.89E-5	. E	. E
manganese-54	Ci	< 1.12E-4	7.94E-5	. E	. E
unidentified	Ci	. E	. E	. E	. E

\*1 - Kr<sup>85</sup> not detected in offgas mix - Limit of detectability =  $6.97 \times 10^{-7}$  uCi/cc

\*2 - No batch releases mode for this period

TABLE 1C  
VERMONT YANKEE  
EFFLUENT AND WASTE DISPOSAL SEMI-ANNUAL REPORT - 1980  
JANUARY - JUNE  
GASEOUS EFFLUENTS - ROUTINE GROUND LEVEL RELEASES\*

\* There were no routine measured ground level continuous, or batch mode, gaseous effluent releases during the reporting period.

TABLE 1D  
VERMONT YANKEE  
EFFLUENT AND WASTE DISPOSAL SEMI-ANNUAL REPORT - 1980  
JANUARY - JUNE  
GASEOUS EFFLUENTS - NON-ROUTINE RELEASES\*

\* There were no non-routine or accidental gaseous effluents releases during the reporting period.

TABLE 2A  
VERMONT YANKEE  
EFFLUENT AND WASTE DISPOSAL SEMI-ANNUAL REPORT - 1980  
JANUARY - JUNE  
LIQUID EFFLUENTS - SUMMATION OF ALL RELEASES\*

\* There were no liquid effluent releases during the reporting period.

TABLE 2B  
VERMONT YANKEE  
EFFLUENT AND WASTE DISPOSAL SEMI-ANNUAL REPORT - 1980  
JANUARY - JUNE  
LIQUID EFFLUENTS

\* There were no liquid effluent releases during the reporting period.

TABLE 3

EFFLUENT AND WASTE DISPOSAL SEMIANNUAL REPORT  
JANUARY - JUNE 1980  
SOLID WASTE AND IRRADIATED FUEL SHIPMENTS

A. SOLID WASTE SHIPPED OFFSITE FOR BURIAL OR DISPOSAL (Not irradiated fuel)

1. Type of waste	Unit	6-month Period	Est. Total Error, %
a. Spent resins, filter sludges, evaporator bottoms, etc.	m <sup>3</sup> Ci	9.85E+1 7.38E+2	±7.5 E1
b. Dry compressible waste, contaminated equip, etc.	m <sup>3</sup> Ci	1.44E+2 1.79E+1	±7.5 E1
c. Irradiated components, control rods, etc.	m <sup>3</sup> Ci	0.0 EO 0.0 EO	.E
d. Other (describe)	m <sup>3</sup> Ci	0.0 EO 0.0 EO	.E

2. Estimate of major nuclide composition (by type of waste)

Unit	6 month	Unit	6 month
a. I <sup>131</sup>	% 1.55E-1	La <sup>140</sup>	% 7.22E-2
Cs <sup>134</sup>	% 2.69E+1	Na <sup>24</sup>	% 1.05E-2
Cs <sup>137</sup>	% 5.05E+1	Ba <sup>140</sup>	% 7.27E-4
Co <sup>58</sup>	% 1.18EO	Ce <sup>141</sup>	% 1.89E-3
Mn <sup>54</sup>	% 1.25EO	I <sup>133</sup>	% 2.17E-3
Zn <sup>65</sup>	% 5.70EO	Zr <sup>95</sup>	% 3.25E-3
Co <sup>60</sup>	% 1.41E+1	Mn <sup>56</sup>	% 2.94E-3
b. Cs <sup>134</sup>	% 2.31E+1	Mn <sup>54</sup>	% 2.45EO
Cs <sup>137</sup>	% 4.08E+1	Zn <sup>65</sup>	% 8.38EO
Co <sup>58</sup>	% 9.80E-1	Co <sup>60</sup>	% 2.43E+1
c.	%	%	. E
d.	%	%	. E
	%	%	
	%	%	
	%	%	

3. Solid Waste Disposition

<u>Number of Shipments</u>	<u>Mode of Transportation</u>	<u>Destination</u>
29	Truck	Barnwell, S.C. Richland, WA

B. IRRADIATED FUEL SHIPMENTS (Disposition)

<u>Number of Shipments</u>	<u>Mode of Transportation</u>	<u>Destination</u>
None		

TABLE 4-A

VERMONT YANKEE JANUARY 1960 JOINT FREQUENCY DISTRIBUTION (UPPER LEVEL)

297.0 FT WIND DATA

## STABILITY CLASS A

CLASS FREQUENCY (PERCENT)  $\times 10^5$ 

## WIND DIRECTION FROM

SPEED (MPH)	N	NNW	NE	ENE	E	EESE	SE	SSSE	S	SSSW	SW	WSW	W	NNW	NE	EWBL	TOTAL
CALM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
C=3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4-7	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8-12	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
13-16	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
17-24	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
GT 24	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
ALL SPEEDS	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

(1)=PERCENT OF ALL GND OBSERVATIONS FOR THIS PAGE  
(2)=PERCENT OF ALL GND OBSERVATIONS FOR THIS PERIODC= CALM (WIND SPEED LESS THAN ONE EQUAL TILT  $\cdot \mu u$  MPH)

TABLE 4-B

297.0 FT WIND DATA		STABILITY CLASS B										CLASS FREQUENCY (PERCENT) n = 1,39									
		WIND DIRECTION FROM																			
SPEED (MPH)		N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NNW	NNW	VNW	TOTAL		
CALM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
0-3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
4-7	2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0		
(1)	6.67	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.33	0.00		
(2)	.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.00	1.00		
8-12	3	0	0	0	0	0	0	0	2	1	0	0	0	0	0	0	1	6	0		
(1)	10.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.67	3.33	0.00	0.00	0.00	0.00	0.00	0.00	3.33	20.00	0.00		
(2)	.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	.09	.05	0.00	0.00	0.00	0.00	0.00	0.00	.05	.28	0.00		
13-16	3	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	1	7	0		
(1)	10.00	0.00	0.00	0.00	0.00	0.00	0.00	3.33	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.33	23.33	0.00		
(2)	.14	0.00	0.00	0.00	0.00	0.00	0.00	.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	.05	.32	0.00			
19-24	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	2	0		
(1)	4.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.67	0.00		
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	.04	0.00			
GT 24	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	C	0	0	0		
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
ALL SPEEDS	6	0	0	0	0	0	0	1	2	1	0	0	0	0	0	0	2	16	%		
(1)	26.67	0.00	0.00	0.00	0.00	0.00	0.00	3.33	6.67	3.33	0.00	0.00	0.00	0.00	0.00	0.00	55.55	0.00	100.00		
(2)	.37	0.00	0.00	0.00	0.00	0.00	0.00	.09	.05	.03	0.00	0.00	0.00	0.00	0.00	0.00	.74	0.00	1.39		

(1) PERCENT OF ALL GOOD OBSERVATIONS FOR THIS PAGE  
 (2) PERCENT OF ALL GOOD OBSERVATIONS FOR THIS PERIOD

C = CALM (WIND SPEED LESS THAN THE EQUAL TO .60 MPH)

TABLE 4-C

VERMONT YANKEE JANUARY 1960 JOINT FREQUENCY DISTRIBUTION (UPPER LEVEL)  
 297.0 ft WIND DATA STABILITY CLASS C CLASS FREQUENCY (PERCENT) = 5.57

SPEED (MPH)	WIND DIRECTION FROM												TOTAL						
	N	NNW	NW	NE	ENE	E	EE	SE	S	SSW	SW	WSW	W	WNW	NNN	WNW	WN	WNW	WNW
CALM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
C=3	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	1	0	2
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.30	0.00	0.00	0.00	1.30	0.00	2.60
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.00	0.00	0.05	0.00	0.00	.09
4-7	5	0	0	0	0	0	2	0	1	0	0	1	0	0	1	5	6	0	1
(1)	6.49	0.00	0.00	0.00	0.00	0.00	2.60	0.00	1.30	0.00	0.00	0.00	1.30	0.39	7.79	0.00	27.27	0.00	.97
(2)	.23	0.00	0.00	0.00	0.00	0.00	.09	0.00	.05	0.00	0.00	0.00	0.05	0.00	.25	.26	0.00	0.00	0.00
8-12	1	0	0	0	0	0	0	0	4	0	0	0	0	0	0	1	7	0	1
(1)	1.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.19	0.00	0.00	0.00	0.00	0.00	1.30	0.09	0.09	0.09	1.00
(2)	.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	.19	0.00	0.00	0.00	0.00	0.00	.05	.32	0.00	0.00	.60
13-16	5	0	0	0	0	0	0	0	0	2	0	0	0	0	1	2	10	0	20
(1)	6.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.60	0.00	0.00	0.00	0.00	0.00	1.30	2.60	12.99	0.00	25.97
(2)	.23	0.00	0.00	0.00	0.00	0.00	0.00	0.00	.04	0.00	0.00	0.00	0.00	0.00	.05	.00	0.00	0.00	.93
17-24	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	2	10	0	15
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.30	2.60	10.39	0.00	19.48
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	.19	.09	.37	0.00	0.00	.70
ALL SPEEDS	11	0	0	0	0	0	0	0	0	0	0	0	0	0	1	2	6	0	6
(1)	14.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.30	7.79	14.29	48.05	0.00
(2)	.51	0.00	0.00	0.00	0.00	0.00	.04	0.00	.23	0.00	0.00	.05	.05	.05	.24	.51	1.72	0.00	3.57

(1) PERCENT OF ALL GOOD OBSERVATIONS FOR THIS PAGE

(2) AVERAGE OF ALL GOOD OBSERVATIONS FOR THIS PERIOD

C = CALM (WIND SPEED LESS THAN OR EQUAL TO .60 MPH)

TABLE 4-D

		JOINT FREQUENCY DISTRIBUTION (UPPER LEVEL)											
		CLASS FREQUENCY (PERCENT) = 50.00											
		WIND DIRECTION FROM											
SPEED (MPH)		N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	NNW
CALM	0	0	0	0	0	0	0	0	0	0	0	0	0
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
C-3	6	2	3	5	6	12	7	4	2	1	2	4	0
(1)	.78	.16	.46	.26	.46	.95	1.10	.64	.37	.16	.16	.37	0.00
(2)	.37	.09	.23	.14	.23	.26	.56	.09	.32	.19	.09	.09	.14
4-7	17	3	6	0	4	10	23	15	6	0	1	2	3
(1)	1.56	.26	.55	0.00	.37	.92	2.11	1.19	.55	0.00	.09	.26	.64
(2)	.79	.14	.26	0.00	.19	.66	1.07	.60	.26	0.00	.05	.09	.14
8-12	37	12	3	2	7	4	11	20	21	3	6	17	.45
(1)	3.60	1.10	.26	.16	.64	.37	1.01	1.84	1.93	.26	.74	1.56	.914
(2)	1.72	.56	.18	.09	.32	.19	.51	.93	.97	.14	.37	.79	2.09
13-16	45	7	5	6	4	1	4	13	1	1	2	.31	.84
(1)	9.14	.64	.46	.55	.55	.37	.09	.37	1.19	.09	.18	2.85	.7.72
(2)	2.09	.32	.23	.26	.26	.19	.05	.19	0.00	0.00	.05	1.44	3.90
17-24	26	2	5	0	0	0	0	4	0	0	0	7	.56
(1)	2.39	.16	.26	0.00	0.00	0.00	0.00	.37	0.00	0.00	0.00	.64	5.15
(2)	1.21	.09	.14	0.00	0.00	0.00	0.00	.19	0.00	0.00	0.00	.32	2.60
GT 24	-	0	0	0	0	0	0	0	0	0	0	2	14
(1)	1.23	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	.18	1.38
(2)	6.40	1.21	2.39	2.02	1.01	2.02	2.21	4.32	3.58	4.69	.78	.65	.7.83
ALL SPEEDS	138	26	22	11	22	24	47	39	51	8	7	14	61
(1)	12.68	2.39	2.02	1.01	2.02	2.21	4.32	3.58	4.69	5.61	1.29	1.21	18.33
(2)	6.40	1.21	1.02	.91	1.02	1.11	2.18	1.61	2.17	2.37	.65	.65	12.24

(1) a PERCENT OF ALL GOOD OBSERVATIONS FOR THIS PAGE  
 (2) a PERCENT OF ALL GOOD OBSERVATIONS FOR THIS PERIOD

b CALM (WIND SPEED LESS THAN OR EQUAL TO .60 MPH)

TABLE 4-E

VERMONT YANKEE JAN-MAR 1980 JOINT FREQUENCY DISTRIBUTION (UPPER LEVEL)

SPEED(MPH)	STABILITY CLASS E																	TOTAL
	CLASS FREQUENCY (PERCENT) = 31.82																	
	WIND DIRECTION FROM																	
SPEED(MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NNW	NNNW	VRBL	
CALM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0-3	9	3	10	10	8	13	21	7	4	1	2	2	6	5	10	9	0	120
(1)	1.31	.40	1.46	1.46	1.17	1.90	3.06	1.02	.58	.15	.29	.29	.87	.73	1.46	1.31	0.00	17.49
(2)	.42	.14	.46	.46	.37	.60	.97	.52	.19	.05	.09	.09	.28	.23	.46	.42	0.00	5.57
4-7	24	4	1	4	6	14	29	18	11	5	8	2	12	10	26	52	0	222
(1)	3.50	.58	.15	.58	.87	2.04	4.23	2.62	1.60	.73	.58	.29	1.75	1.46	3.79	7.58	0.00	32.36
(2)	1.11	.19	.05	.19	.28	.65	1.35	.81	.51	.23	.19	.09	.56	.46	1.21	2.41	0.00	10.30
8-12	23	3	0	0	1	3	3	10	14	1	2	2	10	22	15	88	0	197
(1)	3.35	.44	0.00	0.00	.15	.44	.44	1.46	2.04	.15	.29	.29	1.86	3.21	2.19	12.83	0.00	28.72
(2)	1.07	.14	0.00	0.00	.05	.14	.14	.46	.65	.05	.09	.09	.86	1.02	.70	4.08	0.00	9.14
13-16	16	2	0	0	1	3	0	3	10	1	0	1	7	17	11	33	0	107
(1)	2.33	.29	0.00	0.00	.15	.44	0.00	.72	1.46	.15	0.00	.15	1.02	2.48	1.60	4.81	0.00	15.60
(2)	.74	.09	0.00	0.00	.05	.14	0.00	.23	.86	.05	0.00	.05	.32	.79	.51	1.53	0.00	4.96
19-22	4	0	0	0	0	0	0	0	10	0	0	0	0	4	1	12	0	31
(1)	.58	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.46	0.00	0.00	0.00	0.00	.58	.15	1.75	0.00	4.52
(2)	.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.46	0.00	0.00	0.00	0.00	.19	.05	.56	0.00	1.44
GT 24	1	0	0	0	0	0	0	1	6	0	0	0	0	0	0	1	0	9
(1)	.15	0.00	0.00	0.00	0.00	0.00	0.00	.15	.87	0.00	0.00	0.00	0.00	0.00	.15	0.00	0.00	1.31
(2)	.05	0.00	0.00	0.00	0.00	0.00	0.00	.05	.28	0.00	0.00	0.00	0.00	0.00	.05	0.00	0.00	.42
ALL SPEEDS	77	12	11	14	16	33	53	41	55	8	8	7	35	58	63	195	0	686
(1)	11.22	1.75	1.60	2.04	2.33	4.81	7.73	5.98	8.02	1.17	1.17	1.02	5.10	8.45	9.18	28.43	0.00	100.00
(2)	3.57	.56	.51	.65	.74	1.53	2.46	1.90	2.55	.37	.37	.32	1.42	2.69	2.92	9.04	0.00	31.82

(1)=PERCENT OF ALL GOOD OBSERVATIONS FOR THIS PAGE  
(2)=PERCENT OF ALL GOOD OBSERVATIONS FOR THIS PERIOD

C= CALM (WIND SPEED LESS THAN OR EQUAL TO .60 MPH)

TABLE 4-F

VERMONT YANKEE JAN-MAR 1960 JOINT FREQUENCY DISTRIBUTION (UPPER LEVEL)  
 297.0 FT WIND DATA STABILITY CLASS F CLASS FREQUENCY (PERCENT) = 10.99  
 WIND DIRECTION FROM

SPEED (MPH)	N	NNW	NW	ENE	E	NE	SE	SW	S	SSW	SW	NW	NNW	VRBL	TOTAL	
CALM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
C=3	9	9	7	5	7	8	11	7	5	4	0	2	3	0	90	
(1)	3.60	2.95	2.11	2.95	3.38	4.64	2.95	2.11	1.69	0.00	.84	1.27	2.53	1.27	0.00	
(2)	.42	.42	.32	.23	.37	.51	.32	.23	.19	.19	0.00	.14	.26	.14	0.00	
6=7	9	4	1	0	2.55	1.27	5.49	2.11	3.36	.42	1.27	2.53	1.27	3.36	0.00	
(1)	3.60	1.69	.42	0.00	2.55	1.27	5.49	2.11	3.36	.42	1.27	2.53	1.27	3.36	0.00	
(2)	.42	.19	.05	0.00	.28	.14	.60	.23	.37	.05	.14	.26	.14	.37	0.00	
8=12	7	0	0	0	1	0	3	1	1	1	2	3	1	4	19	
(1)	2.95	0.00	0.00	0.00	.42	0.00	1.27	1.69	1.27	.42	.64	1.27	.42	.64	0.00	
(2)	.32	0.00	0.00	0.00	.05	0.00	.14	.19	.14	.05	.09	.14	.05	.14	0.00	
13=16	1	0	0	0	0	0	0	0	1	0	0	0	0	0	0	
(1)	.42	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.27	0.00	0.00	0.00	0.00	0.00	0.00	
(2)	.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.27	0.00	0.00	0.00	0.00	0.00	0.00	
19=24	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
GT 24	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
ALL SPEEDS	26	13	6	5	14	11	27	16	19	6	6	13	26	35	0	
(1)	10.97	5.49	3.38	2.11	5.91	6.64	11.39	6.75	8.02	2.53	3.38	5.49	8.44	14.77	0.00	
(2)	1.21	.60	.37	.23	.65	.51	1.25	.74	.94	.26	.37	.37	.60	.93	1.62	0.00

(1) PERCENT OF ALL GOOD OBSERVATIONS FOR THIS PERIOD  
 (2) PERCENT OF ALL GOOD OBSERVATIONS FOR THIS PERIOD

C = CALM (WIND SPEED LESS THAN OR EQUAL TO .60 MPH)

TABLE 4-G

297.0 FT WIND DATA		STABILITY CLASS 6												WIND DIRECTION FROM												
		CLASS FREQUENCY (PERCENT) = 1.72												WIND DIRECTION FROM												
SPEED (MPH)		N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	NNW	WNW	WN	NNN	NNW	NN	NNN	VWSL	TOTAL			
CALM		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
C=3	2	0	0	1	0	0	0	1	0	0	1	1	0	0	0	0	0	1	1	1	1	0	1.0	1.0	1.0	
(1)	5.61	0.00	0.00	2.70	2.70	0.00	0.00	2.70	0.00	2.70	0.00	2.70	0.00	0.00	0.00	0.00	0.00	0.00	2.70	2.70	2.70	0.00	0.00	27.03	27.03	27.03
(2)	.09	0.00	0.00	.05	.05	0.00	0.00	.05	0.00	.05	0.00	.05	0.00	0.00	0.00	0.00	0.00	0.00	.05	.05	.05	0.00	0.00	.06	.06	.06
6-7	0	0	0	0	0	0	1	2	1	1	1	1	1	1	1	2	0	0	2	0	3	0	0	2.0	2.0	2.0
(1)	0.00	0.00	0.00	0.00	0.00	0.00	2.70	5.41	2.70	10.61	2.70	5.41	0.00	5.41	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	54.05	54.05
(2)	0.00	0.00	0.00	0.00	0.00	0.00	.05	.04	.05	.19	.05	.05	.05	.04	.00	.00	.00	.00	.00	.00	.14	.00	.00	.00	.00	
8-12	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
(1)	2.70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
(2)	.05	0.00	0.00	.05	.05	0.00	0.00	.05	0.00	.05	0.00	.05	0.00	.05	0.00	.05	.05	.05	.05	.05	.05	.00	.00	.00	.00	.00
13-16	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	.32	
17-20	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
GT 24	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
ALL SPEEDS	3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
(1)	8.11	0.00	0.00	2.70	2.70	5.41	6.11	10.61	5.41	8.11	5.41	8.11	8.11	8.11	8.11	8.11	8.11	8.11	8.11	8.11	8.11	8.11	8.11	8.11	8.11	37
(2)	.14	0.00	0.00	.05	.05	.05	.04	.04	.05	.04	.04	.04	.04	.04	.04	.04	.04	.04	.04	.04	.04	.04	.04	.04	.04	100.00

(1)=PERCENT OF ALL GOOD OBSERVATIONS FOR THIS PAGE

(2)=PERCENT OF ALL GOOD OBSERVATIONS FOR THIS PERIOD

C = CALM (WIND SPEED LESS THAN OR EQUAL TO .60 MPH)

TABLE 4-H

VERMONT YANKEE JAN-MAR 1960 JOINT FREQUENCY DISTRIBUTION (UPPER LEVEL)  
 297.0 FT WIND DATA STABILITY CLASS ALL CLASS FREQUENCY (PERCENT) = 100.00

SPEED(MPH)	N	WIND DIRECTION FROM												NNW	NW	NNE	NE	ENE	E	ESE	SE	SSW	S	SW	WSW	W	WNW	NW	NNW	VRBL	TOTAL		
		N	NNW	NE	ENE	E	ESE	SE	SSW	S	SW	WSW																					
CALM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0					
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
C=3	28	14	22	19	21	27	48	17	16	10	9	5	9	11	14	14	14	14	14	14	14	14	14	14	14	14	14	14	244				
(1)	1.30	.65	1.02	.68	.97	1.25	2.04	.79	.74	.46	.42	.23	.42	.51	.51	.51	.51	.51	.51	.51	.51	.51	.51	.51	.51	.51	.51	.51	13.40				
(2)	1.30	.65	1.02	.68	.97	1.25	2.04	.79	.74	.46	.42	.23	.42	.51	.51	.51	.51	.51	.51	.51	.51	.51	.51	.51	.51	.51	.51	.51	13.40				
4=7	57	11	6	4	16	30	67	38	29	7	10	12	16	29	59	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	496		
(1)	2.64	.51	.37	.19	.74	1.39	3.11	1.76	1.35	.32	.46	.56	.63	.35	.74	.74	.74	.74	.74	.74	.74	.74	.74	.74	.74	.74	.74	.74	.74	23.10			
(2)	2.64	.51	.37	.19	.74	1.39	3.11	1.76	1.35	.32	.46	.56	.63	.35	.74	.74	.74	.74	.74	.74	.74	.74	.74	.74	.74	.74	.74	.74	.74	23.10			
6=12	72	15	3	2	9	7	17	.42	.39	5	7	13	32	.66	.52	.52	.52	.52	.52	.52	.52	.52	.52	.52	.52	.52	.52	.52	.52	565			
(1)	3.34	.70	.14	.09	.62	.32	.79	1.95	1.61	.23	.32	.60	.68	.15	.21	.21	.21	.21	.21	.21	.21	.21	.21	.21	.21	.21	.21	.21	.21	26.21			
(2)	3.34	.70	.14	.09	.62	.32	.79	1.95	1.61	.23	.32	.60	.68	.15	.21	.21	.21	.21	.21	.21	.21	.21	.21	.21	.21	.21	.21	.21	.21	26.21			
13=16	70	9	5	6	7	7	2	9	26	2	1	3	32	.66	.52	.52	.52	.52	.52	.52	.52	.52	.52	.52	.52	.52	.52	.52	.52	565			
(1)	3.25	.42	.23	.26	.32	.32	.09	.42	1.30	.09	.05	.14	.15	.76	.73	.73	.73	.73	.73	.73	.73	.73	.73	.73	.73	.73	.73	.73	.73	23.19			
(2)	3.25	.42	.23	.26	.32	.32	.09	.42	1.30	.09	.05	.14	.15	.76	.73	.73	.73	.73	.73	.73	.73	.73	.73	.73	.73	.73	.73	.73	.73	23.19			
19=24	30	2	3	0	0	0	0	0	0	0	14	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	246				
(1)	1.39	.09	.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	.65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	11.41					
(2)	1.39	.09	.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	.65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	11.41					
GT 24	6	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	56				
(1)	.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	.05	.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.69					
(2)	.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	.05	.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.69					
ALL SPEEDS	263	51	41	31	53	71	130	107	152	24	27	33	107	269	245	352	352	352	352	352	352	352	352	352	352	352	352	352	352	352	2156		
(1)	12.20	2.37	1.90	1.44	2.46	3.29	6.03	4.96	6.12	1.1	1.25	1.53	4.96	13.0	11.36	25.60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2156
(2)	12.20	2.37	1.90	1.44	2.46	3.29	6.03	4.96	6.12	1.1	1.25	1.53	4.96	13.0	11.36	25.60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2156

(1) PERCENT OF ALL GOOD OBSERVATIONS THIS PERIOD  
 (2) PERCENT OF ALL GOOD OBSERVATIONS FOR THIS PERIOD

CA CALM (WIND SPEED LESS THAN 0.0 EQUAL TO .60 MPH)

TABLE 5-A

VERMONT YANKEE APRIL-JUN 1980 JOINT FREQUENCY DISTRIBUTION (UPPER LEVEL)  
297.0 FT WIND DATA STABILITY CLASS A CLASS FREQUENCY (PERCENT) = 1.42

SPEED (MPH)	WIND DIRECTION FROM												TOTAL
	N	NNE	NE	ENE	E	SE	S	SSW	SW	WSW	W	NNW	
CALM	0	0	0	0	0	0	0	0	0	0	0	0	0
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0-5	0	0	0	0	0	1	0	0	0	0	1	0	0
(1)	0.00	0.00	0.00	0.00	0.00	3.23	0.00	0.00	0.00	0.00	3.23	0.00	0.45
(2)	0.00	0.00	0.00	0.00	0.00	.05	0.00	0.00	0.00	0.00	.05	0.00	.04
5-7	1	0	0	1	0	0	0	0	0	0	0	1	0
(1)	3.23	3.23	0.00	0.00	3.23	0.00	0.00	0.00	0.00	0.00	0.00	3.23	0.00
(2)	.05	.05	0.00	0.00	.05	0.00	0.00	0.00	0.00	0.00	0.00	.05	0.00
7-12	1	0	0	0	0	0	5	2	0	0	0	1	0
(1)	3.23	0.00	0.00	0.00	0.00	0.00	16.13	6.45	0.00	0.00	0.00	3.23	0.00
(2)	.05	0.00	0.09	0.00	0.00	0.00	.23	.09	0.00	0.00	0.00	.05	.00
13-16	1	0	0	0	0	1	2	0	0	0	0	1	0
(1)	3.23	0.00	0.00	0.00	0.00	3.23	6.45	0.00	0.00	0.00	0.00	3.23	0.00
(2)	.05	0.00	0.00	0.00	0.00	.05	.09	0.00	0.00	0.00	0.00	.05	0.00
17-24	0	0	0	0	0	0	0	0	0	0	0	0	0
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
GT 24	0	0	0	0	0	0	0	0	0	0	0	0	0
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
ALL SPEEDS	3	1	0	0	1	0	2	7	4	0	0	3	1
(1)	9.68	3.23	0.00	0.00	3.23	0.00	6.45	22.58	12.90	0.00	0.00	9.68	3.23
(2)	.14	.05	0.00	0.00	.05	0.00	.09	.32	.18	0.00	0.00	.05	.01

(1)=PERCENT OF ALL GOOD OBSERVATIONS FOR THIS PAGE  
(2)=PERCENT OF ALL GOOD OBSERVATIONS FOR THIS PERIOD

C= CALM (WIND SPEED LESS THAN OR EQUAL TO .60 MPH)

TABLE 5-B.

SPEED (MPH)	STABILITY CLASS B												WIND DIRECTION FROM												TOTAL
	N	NNW	NW	EW	NE	E	ENE	S	SSW	SW	WSW	W	WNW	WW	WNW	WNW	WW	WNW	WW	WNW	WW	WNW	WW		
CALM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
C=3	0	1	0	2	1	1	2	1	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	
(1)	0.00	1.02	0.00	2.04	1.02	1.02	2.04	1.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.02	0.00	0.00	0.00	0.00	0.00	0.00	9.16	
(2)	0.00	.05	0.00	.09	.05	.05	.09	.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	.05	0.00	0.00	0.00	0.00	0.00	0.00	.41	
4-7	6	6	0	1	1	4	3	2	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
(1)	6.12	0.00	1.02	1.02	4.08	3.06	2.04	0.00	1.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	21.03	
(2)	.27	0.00	.05	.05	.16	.14	.09	0.00	.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	.96	
8-12	1	0	0	0	0	0	2	3	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
(1)	1.02	0.00	0.00	0.00	0.00	0.00	2.04	3.06	1.02	5.10	1.02	0.00	1.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	23.47	
(2)	.05	0.00	0.00	0.00	0.00	0.00	.09	.14	.05	.23	.05	0.00	.05	0.00	0.00	0.00	.14	.27	0.00	0.00	0.00	0.00	0.00	1.05	
13-16	1	3	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
(1)	1.02	3.06	0.00	0.00	0.00	0.00	1.02	0.00	1.02	4.08	0.00	0.00	0.00	4.08	1.02	1.02	1.02	1.02	1.02	1.02	1.02	1.02	1.02	34	
(2)	.05	.14	0.00	0.00	0.00	0.00	.05	0.00	.05	.16	0.00	0.00	0.00	.18	.05	.05	.05	.05	.05	.05	.05	.05	.05	.05	
17-24	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	39.64	
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.56	
GT 24	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.02	
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	.05	
ALL SPEEDS	6	4	1	3	5	7	7	3	10	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	
(1)	8.16	4.08	1.02	3.06	5.10	7.14	7.14	3.06	10.20	1.02	0.00	1.02	a.08	2.04	12.24	30.61	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00	
(2)	.37	.18	.05	.14	.23	.32	.32	.14	.46	.05	0.00	.05	.05	.05	.05	.55	.55	.55	.55	.55	.55	.55	.55	.46	

(1) PERCENT OF ALL GOOD OBSERVATIONS FOR THIS PAGE

(2) PERCENT OF ALL GOOD OBSERVATIONS FOR THIS PERIOD

C = CALM (WIND SPEED LESS THAN OR EQUAL TO .60 MPH)

TABLE 5-C

VERMONT YANKEE APR-JUN 1980 JOINT FREQUENCY DISTRIBUTION (UPPER LEVEL)

297.0 FT WIND DATA STABILITY CLASS C CLASS FREQUENCY (PERCENT) = 6.16

WIND DIRECTION FROM

SPEED (MPH)	N	NNE	NE	ENE	E	EE	SE	SSE	S	SSW	SW	WSW	W	WNW	NNW	VNW	TOTAL
<b>CALM</b>																	
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>C=3</b>																	
(1)	3.70	1.48	0.00	1.48	0.00	0.00	7.4	2.22	7.4	0.00	0.00	1	0	1	2	2	20
(2)	.23	.09	0.00	.09	0.00	.05	.14	.05	0.00	.05	0.00	.05	0.00	.05	0.09	0.09	.02
<b>4-7</b>																	
(1)	1.46	.74	1	1	2	4	1.1	2	1	0	0	1	0	1	4	4	31
(2)	.09	.05	.05	.09	.11	.29	.15	.14	.09	.05	.00	.05	0.00	.05	.16	.09	.20
<b>8-12</b>																	
(1)	3.79	0.00	0.00	0.00	0.00	0.00	7.4	2.22	7.4	0.00	0.00	.05	0.00	.05	.46	.00	27.41
(2)	.23	.05	0.00	0.00	.05	.14	.05	.16	.05	.05	0.00	.05	0.00	.16	.09	.00	.26
<b>13-16</b>																	
(1)	1.48	.74	0.00	0.00	0.00	0.00	7.4	0.00	7.4	0.00	0.00	.05	0.00	.05	.46	0.00	20.74
(2)	.09	.05	0.00	0.00	.05	.00	.05	.00	.05	.05	0.00	.05	0.00	.16	.09	.00	.16
<b>17-24</b>																	
(1)	1.46	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	.74	.74	2.22
(2)	.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	.05	.05	.00
<b>ALL SPEED</b>																	
(1)	11.65	3.70	.74	2.96	3.70	11.65	0.44	5.19	.74	0.44	0.00	0.00	6.67	6.69	0.69	25.93	0.00
(2)	.73	.23	.05	.16	.23	.73	.27	.32	.05	.27	0.00	0.00	.41	.55	1.60	0.00	.16

(1) PERCENT OF ALL GOOD OBSERVATIONS FOR THIS PAGE  
(2) PERCENT OF ALL GOOD OBSERVATIONS FOR THIS PERIOD

C = CALM (WIND SPEED LESS THAN OR EQUAL TO .60 MPH)

TABLE 5-D

VERMONT YANKEE APR-JUN 1980 JOINT FREQUENCY DISTRIBUTION (UPPER LEVEL)

29760 FT WIND DATA

STABILITY CLASS D

CLASS FREQUENCY (PERCENT) = 41.44

## WIND DIRECTION FROM

SPEED(MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	NNW	NW	NNW	VRFCL	TOTAL
CALM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
C-3	10	8	6	11	10	17	15	9	6	4	2	5	7	2	4	14	0	130
(1)	1.10	.88	.66	1.22	1.10	1.88	1.66	.99	.66	.04	.22	.55	.77	.22	.44	1.55	0.00	18.36
(2)	.96	.37	.27	.50	.46	.78	.69	.41	.27	.18	.09	.23	.32	.09	.18	.64	0.00	5.95
4-7	20	12	10	11	11	12	27	35	19	6	6	0	6	4	10	50	0	239
(1)	2.21	1.33	1.10	1.22	1.22	1.33	2.98	3.87	2.10	.66	.66	0.00	.66	.44	1.10	5.52	0.00	26.41
(2)	.92	.55	.46	.50	.50	.55	1.24	1.60	.87	.27	.27	0.00	.27	.18	.46	2.29	0.00	10.94
8-12	22	23	12	6	7	11	12	94	21	5	6	11	14	28	11	35	0	268
(1)	2.43	2.54	1.33	.66	.77	1.22	1.33	4.86	2.32	.55	.56	1.22	1.55	3.09	1.22	3.87	0.00	29.61
(2)	1.01	1.05	.55	.27	.32	.50	.55	2.01	.96	.23	.27	.50	.64	1.28	.50	1.60	0.00	12.27
13-16	15	3	0	1	1	6	4	12	33	3	5	3	14	34	17	34	0	185
(1)	1.66	.33	0.00	.11	.11	.66	.44	1.33	3.65	.33	.55	.33	1.55	3.76	1.88	3.76	0.00	20.04
(2)	.69	.14	0.00	.05	.05	.27	.18	.55	1.51	.14	.23	.14	.64	1.56	.78	1.56	0.00	8.47
19-24	4	1	0	0	0	0	1	3	2	0	0	1	3	8	15	28	0	66
(1)	.44	.11	0.00	0.00	0.00	0.00	.11	.33	.22	0.00	0.00	.11	.33	.68	1.66	3.09	0.00	7.29
(2)	.18	.05	0.00	0.00	0.00	0.00	.05	.14	.09	0.00	0.00	.05	.14	.37	.69	1.28	0.00	3.02
GT 24	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	15	0	17
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	.11	.11	1.66	0.00	1.88
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	.05	.05	.69	0.00	.78
ALL SPEEDS	71	47	28	29	29	46	59	103	81	18	19	20	44	77	58	176	0	905
(1)	7.85	5.19	3.09	3.20	3.20	5.08	6.52	11.38	8.95	1.99	2.10	2.21	4.86	8.51	6.41	19.45	0.00	100.00
(2)	3.25	2.15	1.28	1.33	1.33	2.11	2.70	4.72	3.71	.82	.87	.92	2.01	3.53	2.66	8.06	0.00	41.04

(1)=PERCENT OF ALL GOOD OBSERVATIONS FOR THIS PAGE

(2)=PERCENT OF ALL GOOD OBSERVATIONS FOR THIS PERIOD

C= CALM (=WIND SPEED LESS THAN OR EQUAL TO .60 MPH)

TABLE 5-E

VERMONT YANKEE APR-JUN 1980 JOINT FREQUENCY DISTRIBUTION (UPPER LEVEL)  
 297.0 FT MIND DATA STABILITY CLASS E CLASS FREQUENCY (PERCENT) = 30.08

SPEED(MPH)	MIND DIRECTION FROM												TOTAL						
	N	NNW	NE	ENE	E	EE	SE	SSE	S	SSW	SW	WSW		NNW	NW	WNW	WNW	WNW	WNW
CALM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
C-3	27	12	14	10	19	26	19	14	5	7	2	1	1	15	15	7.5	1.98	0.00	26.79
(1)	4.11	1.63	2.13	1.52	2.69	3.96	2.69	2.13	.76	1.07	.30	.05	.05	.05	.05	.25	.60	0.00	A.06
(2)	1.24	.55	.64	.46	.87	1.19	.87	.64	.23	.32	.09	.05	.05	.05	.05	.25	.60	0.00	A.06
4-7	23	4	1	7	5	14	29	24	5	4	3	4	7	7	1.07	1.07	1.07	1.07	0
(1)	3.50	.61	.15	1.07	.76	2.13	4.41	3.65	.76	.61	.61	.16	.16	.16	.16	.32	.55	0.00	21.0
(2)	1.05	.18	.05	.32	.23	.64	1.33	1.10	.23	.16	.16	.16	.16	.16	.16	.32	.55	0.00	9.62
8-12	12	1	0	2	6	1	7	20	20	2	1	5	10	6	1.1	.46	0	0	18.6
(1)	1.63	.15	0.00	.30	.91	1.07	3.04	5	.76	.15	.76	.15	.16	.16	.16	.16	.31	0.00	A.52
(2)	.55	.05	0.00	.09	.27	.32	.92	.9	.73	.09	.05	.23	.46	.46	.46	.27	.50	0.00	A.52
13-16	4	2	0	0	1	5	10	8	9	1	2	0	3	6	4	1.3	0	0	1.3
(1)	.61	.30	0.00	0.00	.15	.76	1.52	1.22	1.37	.15	.30	0.00	.46	.46	.46	.14	.37	.16	1.3
(2)	.16	.09	0.00	0.00	.05	.23	.46	.37	.41	.05	.09	0.00	.09	.09	.09	.14	.37	.16	1.3
17-24	0	0	0	0	0	0	0	0	0	0	0	0	0	2	1	2	6	0	7.0
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	10.65
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.21
GT 24	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
ALL SPEEDS	66	19	15	19	31	52	76	85	35	18	6	10	24	23	36	184	0	0	657
(1)	10.05	2.69	2.26	2.69	4.72	7.91	11.87	12.94	5.33	2.13	1.22	1.52	3.65	3.50	5.18	21.92	0.00	100.00	
(2)	3.02	.87	.69	.87	1.42	2.36	3.57	3.69	1.60	.64	.37	.46	1.10	1.05	1.56	6.50	0.00	30.00	

(1)=PERCENT OF ALL GOOD OBSERVATIONS FOR THIS PAGE  
 (2)=PERCENT OF ALL GOOD OBSERVATIONS FOR THIS PERIOD

C= CALM (WIND SPEED LESS THAN THE EQUAL TO .60 MPH)

TABLE 5-F

VERMONT YANKEE APR-JUN 1980 JOINT FREQUENCY DISTRIBUTION (UPPER LEVEL)  
 297.0 FT WIND DATA STABILITY CLASS F CLASS FREQUENCY (PERCENT) = 13.74

SPEED (MPH)	WIND DIRECTION FROM												TOTAL
	N	NNW	NE	ENE	E	SE	SSE	S	SSW	SW	WSW	W	
CALM	2	0	0	0	0	0	0	0	0	0	0	0	0
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
C=3	16	15	6	9	9	14	10	8	3	3	1	5	0
(1)	5.33	5.00	2.00	3.00	3.00	9.57	3.33	3.33	2.67	1.00	.33	1.67	0
(2)	.73	.69	.27	.41	.41	.64	.46	.37	.14	.14	.05	.23	0.00
4=7	16	2	0	3	2	9	15	11	6	1	4	4	0
(1)	5.33	5.00	1.00	1.00	1.00	6.7	3.00	5.00	3.67	2.00	.33	1.33	0
(2)	.73	.09	.00	.14	.09	.41	.69	.50	.27	.05	.16	.18	.00
8=12	9	0	0	0	0	0	2	4	0	2	6	4	0
(1)	1.33	0.00	0.00	0.00	0.00	0.00	.67	1.33	0.00	.67	2.00	1.33	0
(2)	.18	0.00	0.00	0.00	0.00	0.00	.09	.16	0.00	.09	.27	.18	.00
13=16	0	0	0	0	0	0	0	0	0	0	1	1	0
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	.33	0.00	0
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	.05	0.00	.00
19=24	0	0	0	0	0	0	0	0	0	0	1	0	0
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	.33	0.00	0
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	.05	0.00	0.00
GT 24	0	0	0	0	0	0	0	0	0	0	0	0	0
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
ALL SPEEDS	36	17	6	12	11	23	27	25	14	6	7	17	14
(1)	12.00	5.67	2.00	4.00	3.67	7.67	9.00	6.33	4.67	2.00	2.67	2.33	4.67
(2)	1.65	.78	.27	.55	.50	1.05	1.24	1.14	.64	.27	.37	.32	.64

(1)=PERCENT OF ALL GROUND OBSERVATIONS FOR THIS PAGE  
 (2)=PERCENT OF ALL GROUND OBSERVATIONS FOR THIS PERIOD

CA = CALM (WIND SPEED IS LESS THAN OR EQUAL TO .60 MPH)

TABLE 5-G

VERMONT YANKEE APR-JUN 1960 JOINT FREQUENCY DISTRIBUTION (UPPER LEVEL)

297.0 FT WIND DATA STABILITY CLASS G

CLASS FREQUENCY (PERCENT) = 2.66

## WIND DIRECTION FROM

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	SWS	W	WNW	NNW	NNN	VNW	TOTAL
CALM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0-3	0	0	2	0	0	0	3	0	2	4	0	0	0	1	0	0	0	14
(1)	0.00	0.00	3.45	0.00	0.00	17	0.00	3.45	6.90	3.45	0.00	0.00	1.72	0.00	0.00	0.00	0.00	24.14
(2)	0.00	0.00	.09	0.00	0.00	.14	0.00	.69	.16	.09	0.00	0.00	.05	0.00	0.00	0.00	0.00	.64
4-7	1	0	0	0	0	0	0	3	1	1	0	1	3	3	5	5	0	26
(1)	1.72	0.00	0.00	0.00	0.00	0.00	5.17	1.72	1.72	0.00	1.72	5.17	5.17	6.62	6.62	0.00	48.83	
(2)	.05	0.00	0.00	0.00	0.00	0.00	.14	.05	.05	0.00	.05	.14	.14	.23	.23	0.00	1.14	
8-12	0	0	0	0	0	0	0	0	1	3	0	2	0	1	5	5	0	16
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.72	5.17	0.00	3.45	0.00	6.90	0.00	1.72	6.62	0.00	27.59
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	.05	.14	0.00	.04	0.00	.16	0.00	.05	.23	0.00	.73
13-16	0	0	0	0	0	0	0	0	1	0	0	1	0	0	0	0	0	2
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.72	0.00	0.00	1.72	0.00	0.00	0.00	0.00	0.00	0.00	3.45
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	.05	.05	0.00	.05	0.00	0.00	0.00	.05	0.00	0.00	.04
17-24	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
GT 24	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
ALL SPEEDS	1	0	2	0	0	0	3	5	5	6	2	4	3	7	4	6	10	56
(1)	1.72	0.00	3.45	0.00	0.00	5.17	5.17	6.62	13.79	3.45	6.90	5.17	12.07	6.90	10.34	17.24	0.00	100.00
(2)	.05	0.00	.09	0.00	0.00	.14	.14	.23	.37	.09	.14	.14	.32	.18	.27	.46	0.00	2.66

(1) PERCENT OF ALL GROUND OBSERVATIONS FOR THIS PAGE  
(2) PERCENT OF ALL GROUND OBSERVATIONS FOR THIS PERIOD

CALM (WIND SPEED LESS THAN OR EQUAL TO .60 MPH)

TABLE 5-H

VERMONT YANKEE APR-JUN 1980 JOINT FREQUENCY DISTRIBUTION (UPPER LEVEL)  
 297.0 FT WIND DATA STABILITY CLASS ALL CLASS FREQUENCY (PERCENT) = 100.00

SPEED (MPH)	WIND DIRECTION FROM												TOTAL					
	N	NNW	NE	ENE	E	EE	SE	SSE	S	SSW	SW	WSW	W	NNW	NN	NNW	VWBL	
CALM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
C-3	58	16	28	34	39	62	50	37	23	17	7	7	14	6	12	42	0	474
(1)	2.66	1.74	1.26	1.56	1.79	2.64	2.29	1.69	1.05	.76	.32	.64	.27	.55	1.92	0.00	21.70	
(2)	2.66	1.74	1.26	1.56	1.79	2.64	2.29	1.69	1.05	.76	.32	.64	.27	.55	1.92	0.00	21.70	
4-7	69	20	13	24	27	49	78	72	32	12	14	11	21	23	35	157	0	657
(1)	3.16	2.92	2.60	1.10	1.24	2.24	3.57	3.30	1.67	.55	.64	.50	.96	1.05	1.60	7.19	0.00	30.08
(2)	3.16	2.92	2.60	1.10	1.24	2.24	3.57	3.30	1.67	.55	.64	.50	.96	1.05	1.60	7.19	0.00	30.08
8-12	45	25	12	8	14	23	36	96	48	13	10	19	35	42	35	126	0	591
(1)	2.06	1.14	.55	.37	.64	1.05	1.74	4.49	2.20	.60	.46	.87	1.60	1.92	5.77	0.00	27.06	
(2)	2.06	1.14	.55	.37	.64	1.05	1.74	4.49	2.20	.60	.46	.87	1.60	1.92	5.77	0.00	27.06	
13-16	25	9	0	1	2	13	15	25	46	5	6	3	26	52	29	72	0	331
(1)	1.05	.41	0.00	.05	.09	.60	.69	1.14	2.20	.23	.37	.14	1.19	2.36	1.33	3.30	0.00	15.16
(2)	1.05	.41	0.00	.05	.09	.60	.69	1.14	2.20	.23	.37	.14	1.19	2.36	1.33	3.30	0.00	15.16
19-24	6	1	0	0	0	0	0	1	3	2	0	0	1	7	10	23	53	0
(1)	.27	.05	0.00	.00	.00	.00	.00	.05	.14	.09	.00	.05	.32	.46	1.05	2.73	0.00	4.90
(2)	.27	.05	0.00	.00	.00	.00	.00	.05	.14	.09	.00	.05	.32	.46	1.05	2.73	0.00	4.90
GT 24	0	0	0	0	0	0	0	0	0	0	0	0	0	2	2	16	0	24
(1)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.09	.82	0.00	1.10
(2)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.09	.82	0.00	1.10
ALL SPEEDS	201	93	53	67	82	147	182	235	153	47	39	41	105	135	136	468	0	2164
(1)	9.20	4.20	2.43	3.07	3.75	6.73	8.35	10.76	7.01	2.15	1.79	1.88	4.81	6.18	6.23	21.33	0.00	100.00
(2)	9.20	4.20	2.43	3.07	3.75	6.73	8.33	10.76	7.01	2.15	1.79	1.88	4.81	6.18	6.23	21.43	0.00	100.00

(1) PERCENT OF ALL GOOD OBSERVATIONS FOR THIS PAGE  
 (2) PERCENT OF ALL GOOD OBSERVATIONS FOR THIS PERIOD

C = CALM (WIND SPEED LESS THAN OR EQUAL TO .60 MPH)

TABLE 6

VERMONT YANKEE  
QUARTERLY AVERAGE X/Q, D/Q AND GAMMA X/Q  
VALUES FOR SELECTED RECEPTORS  
January - June 1985

POINT OF INTEREST	FIRST QUARTER		SECOND QUARTER	
A. Maximum offsite ground level air concentration location	Location: WNW 2415 meters X/Q (undepleted)*: $4.059 \times 10^{-7}$ X/Q (depleted)*: $4.040 \times 10^{-7}$ D/Q**: $8.776 \times 10^{-10}$ Gamma X/Q: * $1.632 \times 10^{-7}$		Location: WNW 2415 meters X/Q (undepleted): $8.701 \times 10^{-7}$ X/Q (depleted): $8.670 \times 10^{-7}$ D/Q: $1.632 \times 10^{-9}$ Gamma X/Q: $3.453 \times 10^{-7}$	
B. For whole body and skin doses from noble gases				
1) Maximum site boundary location	Location: S 0.24 miles X/Q (undepleted): $1.585 \times 10^{-9}$ X/Q (depleted): $1.585 \times 10^{-9}$ D/Q: $1.173 \times 10^{-11}$ Gamma X/Q: $5.579 \times 10^{-7}$		Location: S 0.24 miles X/Q (undepleted): $5.265 \times 10^{-9}$ X/Q (depleted): $5.264 \times 10^{-9}$ D/Q: $2.831 \times 10^{-11}$ Gamma X/Q: $6.437 \times 10^{-7}$	
2) Maximum nearest residence	Location: S 0.33 miles X/Q (undepleted): $6.424 \times 10^{-9}$ X/Q (depleted): $6.423 \times 10^{-9}$ D/Q: $4.327 \times 10^{-11}$ Gamma X/Q: $4.097 \times 10^{-7}$		Location: S 0.33 miles X/Q (undepleted): $1.062 \times 10^{-8}$ X/Q (depleted): $1.061 \times 10^{-8}$ D/Q: $5.246 \times 10^{-11}$ Gamma X/Q: $4.724 \times 10^{-7}$	
C. For organ doses from iodine and particulates in gaseous effluents				
1) Maximum farm location	Location: SSE 3.5 miles X/Q (undepleted): $2.365 \times 10^{-7}$ X/Q (depleted): $2.311 \times 10^{-7}$ D/Q: $1.290 \times 10^{-9}$ Gamma X/Q: $1.488 \times 10^{-7}$		Location: WNW 1.9 miles X/Q (undepleted): $6.390 \times 10^{-7}$ X/Q (depleted): $6.330 \times 10^{-7}$ D/Q: $1.170 \times 10^{-9}$ Gamma X/Q: $2.689 \times 10^{-7}$	

TABLE 6 (continued)

POINT OF INTEREST	FIRST QUARTER		SECOND QUARTER	
2) Maximum nearest residence	Location:	SSE 1.3 miles	Location:	SSE 1.3 miles
	X/Q (undepleted):	$1.100 \times 10^{-7}$	X/Q (undepleted):	$8.000 \times 10^{-8}$
	X/Q (depleted):	$1.097 \times 10^{-7}$	X/Q (depleted):	$7.978 \times 10^{-8}$
	D/Q:	$8.784 \times 10^{-10}$	D/Q:	$5.672 \times 10^{-10}$
	Gamma X/Q:	$4.097 \times 10^{-7}$	Gamma X/Q:	$2.573 \times 10^{-7}$
3) Maximum site boundary location	Location:	SSE 0.53 miles	Location:	SSE 0.53 miles
	X/Q (undepleted):	$3.127 \times 10^{-8}$	X/Q (undepleted):	$4.705 \times 10^{-8}$
	X/Q (depleted):	$3.124 \times 10^{-8}$	X/Q (depleted):	$4.699 \times 10^{-8}$
	D/Q:	$2.673 \times 10^{-10}$	D/Q:	$3.880 \times 10^{-10}$
	Gamma X/Q:	$4.713 \times 10^{-7}$	Gamma X/Q:	$5.055 \times 10^{-7}$

\* Depleted and undepleted X/Qs and Gamma X/Q are in units of sec./m<sup>3</sup>

\*\* Delta (D/Q) in units of 1/m<sup>2</sup>

TABLE 7  
SUMMARY OF RADIOLOGICAL IMPACT ON MAN  
Vermont Yankee Nuclear Power Station  
January - June, 1980

POTENTIAL PATHWAY OR TYPE OF EXPOSURE	ESTIMATED FIRST QUARTER DOSE COMMITMENT	ESTIMATED SECOND QUARTER DOSE COMMITMENT
I. Maximum individual whole body and critical organ doses from receiving-water exposure pathways from liquid releases (mrem).	No liquid releases	No liquid releases
II.		
A. Whole body and skin doses to individuals exposed at point of maximum offsite ground level air concentration of radioactive noble gaseous effluents	(at WNW, 2415 meters)	(at WNW, 2415 meters))
i. Skin dose (mrem)	$5.5 \times 10^{-2}$	$1.1 \times 10^{-1}$
ii. Whole body dose (mrem)	$2.2 \times 10^{-2}$	$4.5 \times 10^{-2}$
B. Whole body and skin doses at maximum site boundary location from radioactive noble gaseous effluents	(at S, 0.24 miles)	(at S, 0.24 miles)
i. Skin dose (mrem)	$7.6 \times 10^{-2}$	$8.3 \times 10^{-2}$
ii. Whole body dose (mrem)	$7.6 \times 10^{-2}$	$8.3 \times 10^{-2}$
C. Whole body and skin doses at maximum nearest residence from radioactive noble gaseous effluents.	(at S, 0.33 miles)	(at S, 0.33 miles)
i. Skin dose (mrem)	$5.6 \times 10^{-2}$	$6.1 \times 10^{-2}$
ii. Whole body dose (mrem)	$5.6 \times 10^{-2}$	$6.2 \times 10^{-2}$

TABLE 7 (continued)

POTENTIAL PATHWAY OR TYPE OF EXPOSURE	ESTIMATED FIRST QUARTER DOSE COMMITMENT	ESTIMATED SECOND QUARTER DOSE COMMITMENT
III. Organ doses to individuals from radioactive iodine and particulates in gaseous effluents (including tritium).		
A. Maximum farm location		
Maximum individual whole body and organ doses from all pathways	(at SSE, 3.5 miles)	(at WNW, 1.9 miles)
i. Bone (mrem)	$3 \times 10^{-3}$ (child)	$7.3 \times 10^{-4}$ (child)
ii. Thyroid (mrem)	$.1 \times 10^{-3}$ (child)	$7.0 \times 10^{-2}$ (infant)
iii. GI(LLI) (mrem)	$2.0 \times 10^{-3}$ (teen)	$7.9 \times 10^{-4}$ (child)
iv. Whole body (mrem)	$2.0 \times 10^{-3}$ (child)	$8.7 \times 10^{-4}$ (child)
B. Critical organ doses to maximum nearest resident from the inhalation, ingestion and ground plane exposure of iodine and particulates	(at SSE, 1.3 miles)	(at SSE, 1.3 miles)
i. Bone dose (mrem)	$1.3 \times 10^{-3}$ (child)	$2.7 \times 10^{-4}$ (child)
ii. Thyroid dose (mrem)	$1.3 \times 10^{-3}$ (child)	$2.2 \times 10^{-4}$ (child)
iii. GI(LLI) (mrem)	$1.3 \times 10^{-3}$ (child)	$2.1 \times 10^{-4}$ (child)
iv. Whole body as critical organ (mrem)	$1.3 \times 10^{-3}$ (child)	$2.2 \times 10^{-4}$ (child)

TABLE 7 (continued)

POTENTIAL PATHWAY OR TYPE OF EXPOSURE	ESTIMATED FIRST QUARTER DOSE COMMITMENT	ESTIMATED SECOND QUARTER DOSE COMMITMENT
C. Organ doses to individuals at point of maximum ground level air concentration of gaseous effluents from inhalation and ground exposure of iodine and particulates	(at WNW, 2415 meters)	(at WNW, 2415 meters)
i. Bone dose (mrem)	$1.1 \times 10^{-3}$ (all)	$4.5 \times 10^{-4}$ (all)
ii. Thyroid dose (mrem)	$1.4 \times 10^{-3}$ (all)	$2.5 \times 10^{-3}$ (child)
iii. GI(LLI) (mrem)	$1.5 \times 10^{-3}$ (all)	$5.5 \times 10^{-4}$ (adult & teen)
iv. Whole body as critical organ (mrem)	$1.2 \times 10^{-3}$ (all)	$5.5 \times 10^{-4}$ (teen)
D. Organ doses to individuals at point of maximum site boundary air concentration of gaseous effluents from inhalation and ground exposure of iodine and particulates	(at SSE, 0.53 miles)	(at SSE, 0.53 miles)
i. Bone dose (mrem)	$3.4 \times 10^{-4}$ (all)	$1.0 \times 10^{-4}$ (all)
ii. Thyroid dose (mrem)	$3.7 \times 10^{-4}$ (child)	$2.2 \times 10^{-4}$ (child)
iii. GI(LLI) (mrem)	$3.5 \times 10^{-4}$ (all)	$1.1 \times 10^{-4}$ (all)
iv. Whole body as critical organ	$3.5 \times 10^{-4}$ (all)	$1.1 \times 10^{-4}$ (all)

TABLE 7 (continued)

POTENTIAL PATHWAY OR TYPE OF EXPOSURE	ESTIMATED FIRST QUARTER DOSE COMMITMENT	ESTIMATED SECOND QUARTER DOSE COMMITMENT
IV. Whole body doses to individuals and populations in unrestricted areas from <u>direct</u> radiation from the facility.		
A. Maximum site boundary (mrem) (west of turbine building)	3.4	3.5
B. Population dose (person-rem)	$1.9 \times 10^{-2}$	$1.9 \times 10^{-2}$
V. Whole body dose to the population from all receiving-water related pathways from liquid releases. (person-rem).	No liquid releases	No liquid releases

TABLE 7 (continued)

POTENTIAL PATHWAY OR TYPE OF EXPOSURE	ESTIMATED FIRST QUARTER DOSE COMMITMENT	ESTIMATED SECOND QUARTER DOSE COMMITMENT
VI.		
A. Whole body doses to the population and average individual out to 50 miles from noble gaseous effluents		
i. Whole body dose to population (person-rem)	0.77	0.92
ii. Average individual whole body dose (mrem)	$6.7 \times 10^{-4}$	$8.0 \times 10^{-4}$
iii. Skin dose to population (person-rem)	1.5	1.7
iv. Average individual skin dose (mrem)	$1.3 \times 10^{-3}$	$1.5 \times 10^{-3}$
B. Organ doses to 50 mile population, and average individual, from inhalation, ingestion of milk, meat, and vegetables, and ground exposure to iodine and particulates in gaseous effluents		
i. Thyroid population dose (person-rem)	$2.5 \times 10^{-2}$	$1.3 \times 10^{-1}$
ii. Average individual thyroid dose (mrem)	$2.2 \times 10^{-5}$	$1.1 \times 10^{-4}$
iii. Whole body population dose (person-rem)	$2.3 \times 10^{-2}$	$6.6 \times 10^{-3}$
iv. Average individual whole body dose (mrem)	$2.0 \times 10^{-5}$	$5.7 \times 10^{-6}$

APPENDIX A

EFFLUENT AND WASTE DISPOSAL SEMI-ANNUAL REPORT

Supplemental Information

January - June 1980

Facility: Vermont Yankee Nuclear Power Station

Licensee: Vermont Yankee Nuclear Power Corporation

1. Regulatory Limits

- a. Fission and activation gases:  $0.08/\bar{E}$  Ci/sec.
- b. Iodines:  $0.48 \mu\text{Ci}/\text{sec.}$
- c. Particulates, half-lives >8 days:  $1.6 \times 10^3 \text{ MPC}_a \text{ Ci/sec.}$
- d. Liquid effluents:  $1 \times 10^{-7} \mu\text{Ci}/\text{ml}$   
(HTO:  $3 \times 10^{-3} \mu\text{Ci}/\text{ml}$ , dissolved Noble gases:  
 $4 \times 10^{-5} \mu\text{Ci}/\text{ml}$ ). Isotopic limits are found  
in 10CFR20 App. B, Table II, Column 2.

2. Maximum Permissible Concentrations

Provided below are the MPC's used in determining allowable release rates or concentrations.

- a. Fission and activation gases: No MPC limits
- b. Iodines: No MPC limits
- c. Particulates, half-lives >8 days: See 10CFR20, App. B, Table II, Column 1
- d. Liquid effluents: See 10CFR20, App. B, Table II, Column 2.

3. Average Energy

Provided below are the average energy ( $\bar{E}$ ) of the radionuclide mixture in releases of fission and activation gasses, if applicable.

- a. Average gamma energy: 1st Quarter 0.998 MeV/Dis.  
2nd Quarter 0.888 MeV/Dis.
- b. Average beta energy: Not Applicable

#### 4. Measurements and Approximations of Total Radioactivity

Provided below are the methods used to measure or approximate the total radioactivity in effluents and the methods used to determine radionuclide composition.

##### a. Fission and Activation Gases

Daily samples are drawn at the discharge of the Air Ejector. Isotopic breakdown of the releases are determined from these samples. A logarithmic chart of the stack gas monitor is read daily to determine the gross release rate. At the very low release rates normally encountered during operation with the Augmented Off Gas system the error of release rates may be approximately  $\pm 100\%$ .

##### b. Iodines

Continuous isokinetic samples are drawn from the plant stack through a particulate filter and charcoal cartridge. The filters and cartridge are removed weekly (if releases are less than 4% of the Tech Spec limit), or daily (if they are greater than 4% of the limit), and are analyzed for radioiodine 131, 132, 133, 134, and 135. The iodines found on the filter are added to those on the charcoal cartridge. The error involved in these steps may be approximately  $\pm 50\%$ .

##### c. Particulates

The particulate filters described in b. above are also counted for particulate radioactivity. The error involved in this sample is also approximately  $\pm 50\%$ .

##### d. Liquid Effluents

Radioactive liquid effluents released from the facility are continuously monitored. Measurements are also made on a representative sample of each batch of radioactive liquid effluents released. For each batch, station records are retained of the total activity ( $\text{mCi}$ ) released, concentration ( $\mu\text{Ci}/\text{ml}$ ) of gross radioactivity, volume (liters), and approximate total quantity of water (liters) used to dilute the liquid effluent prior to release to the Connecticut River.

Each batch of radioactive liquid effluent released is analyzed for gross gamma and gamma isotopic radioactivity. A monthly proportional composite sample, comprising an aliquot of each batch released during a month, is also analyzed for tritium, SR-89, SR-90, gross beta and gross alpha radioactivity, in addition to gamma spectroscopy.

There were no liquid releases during the reporting period.

5. Batch Releases

a. Liquid

There were no routine liquid batch releases during the reporting period.

b. Gaseous

There were no routine gaseous batch releases during the reporting period.

6. Abnormal Releases

a. Liquid

There were no non-routine liquid releases during the reporting period.

b. Gaseous

There were no non-routine gaseous releases during the reporting period.