



UNITED STATES
NUCLEAR REGULATORY COMMISSION
WASHINGTON, D. C. 20555

DUQUESNE LIGHT COMPANY

OHIO EDISON COMPANY

PENNSYLVANIA POWER COMPANY

DOCKET NO. 50-334

BEAVER VALLEY POWER STATION, UNIT NO. 1

AMENDMENT TO FACILITY OPERATING LICENSE

Amendment No. 32
License No. DPR-66

1. The Nuclear Regulatory Commission (the Commission) has found that:
 - A. The application for amendment by Duquesne Light Company, Ohio Edison Company, and Pennsylvania Power Company (the licensees) dated May 14, 1980, complies with the standards and requirements of the Atomic Energy Act of 1954, as amended (the Act) and the Commission's rules and regulations set forth in 10 CFR Chapter I;
 - B. The facility will operate in conformity with the application, the provisions of the Act, and the rules and regulations of the Commission;
 - C. There is reasonable assurance (i) that the activities authorized by this amendment can be conducted without endangering the health and safety of the public, and (ii) that such activities will be conducted in compliance with the Commission's regulations;
 - D. The issuance of this amendment will not be inimical to the common defense and security or to the health and safety of the public; and
 - E. The issuance of this amendment is in accordance with 10 CFR Part 51 of the Commission's regulations and all applicable requirements have been satisfied.

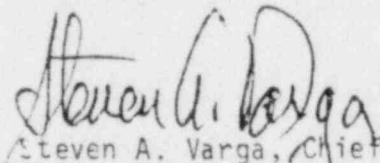
2. Accordingly, Facility Operating License No. DPR-66 is hereby amended by deleting paragraph 2.C.(3) in its entirety.
3. In addition, the license is amended by changes to the Technical Specifications as indicated in the attachment to this license amendment, and paragraph 2.C.(2) of this license is hereby amended to read as follows:

(2) Technical Specifications

The Technical Specifications contained in Appendices A and B, as revised through Amendment No. 32, are hereby incorporated in the license. The licensee shall operate the facility in accordance with the Technical Specifications.

4. This license amendment is effective as of the date of its issuance.

FOR THE NUCLEAR REGULATORY COMMISSION


Steven A. Varga, Chief
Operating Reactors Branch #1
Division of Licensing

Attachment:
Changes to the Technical
Specifications

Date of Issuance: September 29, 1980

ATTACHMENT TO LICENSE AMENDMENT

AMENDMENT NO. 32 TO FACILITY OPERATING LICENSE NO. DPR-66

DOCKET NO. 50-334

Revise Appendix A as follows:

Remove Page

IV

Insert Pages

IV
3/4 3-49

INDEX

LIMITING CONDITIONS FOR OPERATION AND SURVEILLANCE REQUIREMENTS

<u>SECTION</u>	<u>Page</u>
<u>3/4.2 POWER DISTRIBUTION LIMITS</u>	
3/4.2.1 Axial Flux Difference.....	3/4 2-1
3/4.2.2 Heat Flux Hot Channel Factor.....	3/4 2-3
3/4.2.3 Nuclear Enthalpy Hot Channel Factor.....	3/4 2-8
3/4.2.4 Quadrant Power Tilt Ratio.....	3/4 2-10
3/4.2.5 DNB Parameters.....	3/4 2-12
<u>3/4.3 INSTRUMENTATION</u>	
3/4.3.1 PROTECTIVE INSTRUMENTATION.....	3/4 3-1
3/4.3.2 ENGINEERED SAFETY FEATURE INSTRUMENTATION.....	3/4 3-14
3/4.3.3 MONITORING INSTRUMENTATION	
Radiation Monitoring.....	3/4 3-33
Movable Incore Detectors.....	3/4 3-37
Seismic Instrumentation.....	3/4 3-38
Metereological Instrumentation.....	3/4 3-41
Remote Shutdown Instrumentation.....	3/4 3-44
Fire Detection Instrumentation.....	3/4 3-47
Chlorine Detection System.....	3/4 3-49
<u>3/4.4 REACTOR COOLANT SYSTEM</u>	
3/4.4.1 REACTOR COOLANT LOOPS	
Normal Operation.....	3/4 4-1
Isolated Loop.....	3/4 4-3
Isolated Loop Startup.....	3/4 4-4

POOR ORIGINAL

INSTRUMENTATION

CHLORINE DETECTION SYSTEMS

LIMITING CONDITION FOR OPERATION

3.3.3.7 Three independent chlorine detection systems, with their alarm/trip setpoints adjusted to actuate at a chlorine concentration of less than or equal to 5 ppm, shall be OPERABLE.

APPLICABILITY: MODES 1, 2, 3 and 4.

ACTION:

- a. With one chlorine detection system inoperable, operation may continue provided the inoperable detector is placed in the tripped condition within 1 hour.
- b. With two chlorine detection systems inoperable, restore one of the inoperable detection systems to OPERABLE status within 7 days, or within the next 6 hours, initiate and maintain operation of the control room emergency ventilation system in the recirculation mode of operation.
- c. With no chlorine detection system OPERABLE, within 1 hour initiate and maintain operation of the control room emergency ventilation system in the recirculation mode of operation.
- d. The provisions of Specification 3.0.4 are not applicable.

SURVEILLANCE REQUIREMENTS

4.3.3.7 Each chlorine detection system shall be demonstrated OPERABLE by performance of a CHANNEL FUNCTION TEST at least once per 31 days and a CHANNEL CALIBRATION at least once per 18 months.