

February 24, 1993

Attached are the recent revisions to the Offsite Dose Calculation Manual's (ODCM) Chapter 10 and Appendix F for Braidwood Station. Please complete the following manual update:

REMOVE

Braidwood Station Annex  
Entire Chapter 10.  
p. 10-i to 10-iii,  
10-1 to 10-18

Braidwood Station Annex  
Entire Appendix F  
p. F-i to F-iv,  
F-1 to F-22

INSERT

Braidwood Station Annex  
Entire Chapter 10  
Revision O.K., Jan. 1993  
p. 10-i to 10-v,  
10-1 to 10-19

Braidwood Station Annex  
Entire Appendix F  
Includes Rev. O.K.  
p. F-1 to F-iv  
F-1 to F-22

Please sign and date this control sheet and return to:

COMMONWEALTH EDISON COMPANY  
c/o Document Control - Emergency Preparedness  
1400 Opus Pl.- 5th Floor  
Downers Grove, IL 60515  
(708)663-6547

Your signature indicates you have verified that your control number is correct and you have updated your manual.

\_\_\_\_\_  
Signature

\_\_\_\_\_  
Date

X244

NRC C/O DOC CTRL DSK, C. PATEL  
DIRECTOR OF NUC. REACTOR REGULATION  
U. S. NUC. REGULATORY COMMISSION  
MAIL STATION P1-137

WASHINGTON  
20555

9303290122 930131  
PDR ADOCK 05000456  
P PDR

ZEMERPLN/347/18

*Handwritten:* Add: NRR/DREP/PRPB  
Acc 0/1  
DC

## BRAIDWOOD ANNEX INDEX

| <u>PAGE</u> | <u>REVISION</u> |
|-------------|-----------------|
| CHAPTER 10  |                 |
| 10-i        | O.K             |
| 10-ii       | O.K             |
| 10-iii      | O.K             |
| 10-iv       | O.K             |
| 10-v        | O.K             |
| 10-1        | O.K             |
| 10-2        | O.K             |
| 10-3        | O.K             |
| 10-4        | O.K             |
| 10-5        | O.K             |
| 10-6        | O.K             |
| 10-7        | O.K             |
| 10-8        | O.K             |
| 10-9        | O.K             |
| 10-10       | O.K             |
| 10-11       | O.K             |
| 10-12       | O.K             |
| 10-13       | O.K             |
| 10-14       | O.K             |
| 10-15       | O.K             |
| 10-16       | O.K             |
| 10-17       | O.K             |
| 10-18       | O.K             |
| 10-19       | O.K             |

## CHAPTER 10

## RADIOACTIVE EFFLUENT TREATMENT AND MONITORING

## TABLE OF CONTENTS

|            |                                                              |   |
|------------|--------------------------------------------------------------|---|
| 10.1       | AIRBORNE RELEASES . . . . .                                  | 1 |
| 10.1.1     | System Description . . . . .                                 | 1 |
| 10.1.1.1   | Waste Gas Holdup System . . . . .                            | 1 |
| 10.1.1.2   | Ventilation Exhaust Treatment System . . . . .               | 1 |
| 10.1.2     | Radiation Monitors . . . . .                                 | 1 |
| 10.1.2.1   | Auxiliary Building Vent Effluent Monitors . . . . .          | 1 |
| 10.1.2.2   | Containment Purge Effluent Monitors . . . . .                | 2 |
| 10.1.2.3   | Waste Gas Decay Tank Monitors . . . . .                      | 2 |
| 10.1.2.4   | Gland Steam and Condenser Air Ejector Monitors . . . . .     | 2 |
| 10.1.2.5   | Radwaste Building Ventilation Monitor . . . . .              | 3 |
| 10.1.2.6   | Component Cooling Water Monitor . . . . .                    | 3 |
| 10.1.2.7   | Miscellaneous Ventilation Monitors . . . . .                 | 3 |
| 10.1.3     | Alarm and Trip Setpoints . . . . .                           | 3 |
| 10.1.3.1   | Setpoint Calculations . . . . .                              | 3 |
| 10.1.3.1.1 | Auxiliary Building Vent Effluent Monitors . . . . .          | 3 |
| 10.1.3.1.2 | Containment Purge Effluent Monitors . . . . .                | 4 |
| 10.1.3.1.3 | Waste Gas Decay Tank Effluent Monitors . . . . .             | 4 |
| 10.1.3.1.4 | Component Cooling Water Monitors . . . . .                   | 4 |
| 10.1.3.2   | Release Limits . . . . .                                     | 4 |
| 10.1.3.3   | Release Mixture . . . . .                                    | 5 |
| 10.1.3.4   | Conversion Factors . . . . .                                 | 5 |
| 10.1.3.5   | HVAC Flow Rates . . . . .                                    | 5 |
| 10.1.4     | Allocation of Effluents from Common Release Points . . . . . | 5 |
| 10.1.5     | Dose Projections for Batch Releases . . . . .                | 6 |
| 10.2       | LIQUID RELEASES . . . . .                                    | 6 |
| 10.2.1     | System Description . . . . .                                 | 6 |
| 10.2.1.1   | Release Tanks . . . . .                                      | 6 |
| 10.2.2     | Radiation Monitors . . . . .                                 | 6 |
| 10.2.2.1   | Liquid Radwaste Effluent Monitors . . . . .                  | 6 |
| 10.2.2.2   | Station Blowdown Monitor . . . . .                           | 6 |

## CHAPTER 10

## RADIOACTIVE EFFLUENT TREATMENT AND MONITORING

## TABLE OF CONTENTS

|            |                                                                                                         |    |
|------------|---------------------------------------------------------------------------------------------------------|----|
| 10.2.2.3   | Reactor Containment Fan Cooler (RCFC) and Essential Service Water (ESSW) Outlet Line Monitors . . . . . | 7  |
| 10.2.3     | Alarm and Trip Setpoints . . . . .                                                                      | 7  |
| 10.2.3.1   | Setpoint Calculation . . . . .                                                                          | 7  |
| 10.2.3.1.1 | Liquid Radwaste Effluent Monitor . . . . .                                                              | 7  |
| 10.2.3.1.2 | Station Blowdown Monitor . . . . .                                                                      | 7  |
| 10.2.3.2   | Discharge Flow Rates . . . . .                                                                          | 8  |
| 10.2.3.2.1 | Release Tank Discharge Flow Rate . . . . .                                                              | 8  |
| 10.2.3.3   | Release Limits . . . . .                                                                                | 8  |
| 10.2.3.4   | Release Mixture . . . . .                                                                               | 9  |
| 10.2.3.5   | Conversion Factors . . . . .                                                                            | 9  |
| 10.2.3.6   | Liquid Dilution Flow Rates . . . . .                                                                    | 9  |
| 10.2.4     | Allocation of Effluents from Common Release Points . . . . .                                            | 9  |
| 10.2.5     | Projected Concentrations for Releases . . . . .                                                         | 9  |
| 10.3       | SOLIDIFICATION OF WASTE/PROCESS CONTROL PROGRAM . . . . .                                               | 11 |

CHAPTER 10  
LIST OF TABLES

| <u>NUMBER</u> |                                                                    | <u>PAGE</u> |
|---------------|--------------------------------------------------------------------|-------------|
| 10-1          | Assumed Composition of the Braidwood<br>Station Noble Gas Effluent | 10-12       |
| 10-2          | Assumed Composition of the Braidwood<br>Station Liquid Effluent    | 10-13       |

## CHAPTER 10

## LIST OF FIGURES

| <u>NUMBER</u> |                                                   | <u>PAGE</u> |
|---------------|---------------------------------------------------|-------------|
| 10-1          | Simplified HVAC and Gaseous Effluent Flow Diagram | 10-15       |
| 10-2          | Simplified Liquid Radwaste Processing Diagram     | 10-17       |
| 10-3          | Simplified Liquid Effluent Flow Diagram           | 10-18       |
| 10-4          | Simplified Solid Radwaste Processing Diagram      | 10-19       |

## CHAPTER 10

## RADIOACTIVE EFFLUENT TREATMENT AND MONITORING

## 10.1 AIRBORNE RELEASES

## 10.1.1 System Description

A simplified HVAC and gaseous effluent flow diagram is provided in Figure 10-1. The principal release points for potentially radioactive airborne effluents are the two auxiliary building vent stacks (designated Unit 1 Vent Stack and Unit 2 Vent Stack in Figure 10-1). In the classification scheme of Section 4.1.4, each is classified as a vent release point (see Table A-1 of Appendix A).

## 10.1.1.1 Waste Gas Holdup System

The waste gas holdup system is designed and installed to reduce radioactive gaseous effluents by collecting reactor coolant system off-gases from the reactor coolant system and providing for delay or holdup to reduce the total radioactivity by radiodecay prior to release to the environment. The system is described in Section 11.3.2 of the Byron/Braidwood UFSAR.

## 10.1.1.2 Ventilation Exhaust Treatment System

Ventilation exhaust treatment systems are designed and installed to reduce gaseous radioiodine or radioactive material in particulate form in gaseous effluents by passing ventilation or vent exhaust gases through HEPA filters (and charcoal adsorbers when required to mitigate potential iodine releases) prior to release to the environment. Such a system is not considered to have any effect on noble gas effluents. The ventilation exhaust treatment systems are shown in Figure 10-1.

Engineered safety features atmospheric cleanup systems are not considered to be ventilation exhaust treatment system components.

## 10.1.2 Radiation Monitors

## 10.1.2.1 Auxiliary Building Vent Effluent Monitors

Monitors 1RE-PRO28 (Unit 1) and 2RE-PRO28 (Unit 2) continuously monitor the final effluent from the auxiliary building vent stacks.

Both vent stack monitors feature automatic isokinetic sampling, grab sampling, and tritium sampling.

In normal operation all three noble gas channels (low, mid-range, high) are on line and active. On a high alarm the low and mid-range noble gas channels are closed and only the high range noble gas channel remains active. The iodine and particulate channels, however, continue to operate under all conditions.

No automatic isolation or control functions are performed by these monitors. Pertinent information on these monitors is provided in Byron/Braidwood UFSAR Table 11.5-1.

#### 10.1.2.2 Containment Purge Effluent Monitors

Monitors 1RE-PRO01 (Unit 1) and 2RE-PRO01 (Unit 2) continuously monitor the effluent from the Unit 1 and Unit 2 containments, respectively. When airborne radioactivity in the containment purge effluent stream exceeds a specified level, station personnel will follow established procedures to terminate the release by manually activating the containment purge valves. Additionally, the auxiliary building vent effluent monitors provide an independent, redundant means of monitoring the containment purge effluent.

No automatic isolation or control functions are performed by these monitors.

Pertinent information on these monitors is provided in Byron/Braidwood UFSAR Table 11.5-1.

Area Radiation Monitors 1(2) RE-AR011 and 1(2) RE-AR012 monitor the containment atmosphere. On high alarm during a containment purge, these monitors will automatically terminate the purge.

#### 10.1.2.3 Waste Gas Decay Tank Monitors

Monitors ORE-PRO02A/B continuously monitor the noble gas activity released from the gas decay tanks.

On high alarm, the monitors automatically initiate closure of the valve OGW014 thus terminating the release.

Pertinent information on these monitors and associated control devices is provided in Byron/Braidwood UFSAR Table 11.5-1.

#### 10.1.2.4 Gland Steam and Condenser Air Ejector Monitors

Monitors 1RE-PRO27 and 2RE-PRO27 continuously monitor the condenser air ejector gas from Units 1 and 2, respectively. On high alarm 1(2)RE-PRO27 initiates startup of the offgas treatment system.

Pertinent information on these monitors is provided in Byron/Braidwood UFSAR Table 11.5-1.

10.1.2.5 Radwaste Building Ventilation Monitor

Monitor ORE-PR026 continuously monitors radioactivity in the radwaste building ventilation system. No control device is initiated by this channel.

Pertinent information on this monitor is provided in Byron/Braidwood UFSAR Table 11.5-1.

10.1.2.6 Component Cooling Water Monitor

Monitors ORE-PR009 (common), 1RE-PR009 (Unit 1), and 2RE-PR009 (Unit 2) continuously monitor the component cooling water heat exchanger outlets. On high alarm ORE-PR009 initiates closure of both component cooling water surge tank (CCWST) vents, 1RE-PR009 initiates closure of the Unit 1 CCWST vent, and 2RE-PR009 initiates closure of the Unit 2 CCWST vent.

Pertinent information on this monitor is provided in Byron/Braidwood UFSAR Table 11.5-1.

10.1.2.7 Miscellaneous Ventilation Monitors

Monitor ORE-PR003 continuously monitors radioactivity in the ventilation exhaust from the laboratory fume hoods. No control device is initiated by this channel.

Pertinent information on this monitor and associated devices is provided in Byron/Braidwood UFSAR Table 11.5-1.

10.1.3 Alarm and Trip Setpoints

10.1.3.1 Setpoint Calculations

10.1.3.1.1 Auxiliary Building Vent Effluent Monitors

The setpoints for the low range noble gas channel are conservatively established at 5% of the maximum permissible station release rate for the high alarm and 1/2% of the maximum release rate for the alert alarm.

The setpoints for the high range noble gas channel are conservatively established at 50% of the maximum permissible station release rate for the high alarm and 25% of the maximum release rate for the alert alarm.

## 10.1.3.1.2 Containment Purge Effluent Monitors

The setpoints are established at 1.25 times the analyzed containment noble gas activity during purge.

## 10.1.3.1.3 Waste Gas Decay Tank Effluent Monitors

The setpoints are established at 1.25 times the analyzed waste gas tank activity during release.

## 10.1.3.1.4 Component Cooling Water Monitors

The setpoint is based on the radionuclide mix in Table 10-1. The total calculated detector response is divided by 2 to obtain the final setpoint. (See section 10.2.3.5 for the conversion factor).

## 10.1.3.2 Release Limits

Alarm and trip setpoints of gaseous effluent monitors are established to ensure that the release rate limits of 10 CFR 20 are not exceeded. The release limits are found by solving Equations 10-1 and 10-2 for the total allowed release rate of vent releases,  $Q_{tv}$ .

$$(1.11)Q_{tv} \sum (\bar{V}_i f_i) \leq 500 \text{ mrem/yr} \quad (10-1)$$

$$Q_{tv} \sum \{ (f_i) [ \bar{L}_i (X/Q)_{tv} \exp(-\lambda_i R/3600 u_{vi}) + 1.11 V_i ] \} < 3000 \text{ rem/yr} \quad (10-2)$$

The summations are over noble gas radionuclides  $i$ .

$f_i$  Fractional Radionuclide Composition

The release rate of noble gas radionuclide  $i$  divided by the total release rate of all noble gas radionuclides.

$Q_{tv}$  Total Allowed Release Rate, [ $\mu\text{Ci/sec}$ ]  
Vent Release

The total allowed release rate of all noble gas radionuclides released as vent releases.

$\exp(-\lambda_i R/3600 u_{vi})$  is set equal to 1.0 for setpoint calculations.

The remaining parameters in Equation 10-1 have the same definitions as in Equation A-8 of Appendix A. The remaining parameters in Equation 10-2 have the same definition as in Equation A-9 of Appendix A.

Equation 10-1 is based on Equation A-8 of Appendix A and the 10 CFR 20 restriction on whole body dose rate (500 mrem/yr) due to noble gases released in gaseous effluents (see Section A.1.3.1 of Appendix A). Equation 10-2 is based on Equation A-9 of Appendix A and the 10 CFR 20 restriction on skin dose rate (3000 mrem/yr) due to noble gases released in gaseous effluents (see Section A.1.3.2 of Appendix A).

Since the solution to Equation 10-2 is more conservative than the solution to Equation 10-1, the value of Equation 10-2 ( $3.09 \times 10^6 \mu\text{Ci/sec}$ ) is used as the limiting noble gas release rate. During evolutions involving releases from the containment or waste gas decay tanks, the release rate from each release path is procedurally limited to  $1 \times 10^6 \mu\text{Ci/sec}$  (less than 1/3 the maximum permissible station release rate).

Calibration methods and surveillance frequency for the monitors will be conducted as specified in the RETS.

#### 10.1.3.3

##### Release Mixture

In the determination of alarm and trip setpoints, the radioactivity mixture in exhaust air is assumed to have the radionuclide composition of Table 10-1.

#### 10.1.3.4

##### Conversion Factors

The response curves used to determine the monitor count rates are based on the sensitivity to Xe-133 for conservatism.

#### 10.1.3.5

##### HVAC Flow Rates

The plant vent stack flow rates are obtained from 1/2 PR28J. However, if the readout indicates "0" flow, the following minimum rated fan flow values are currently used:

|        |   |                           |
|--------|---|---------------------------|
| Unit 1 | - | $6.15 \times 10^6$ cc/sec |
| Unit 2 | - | $4.55 \times 10^6$ cc/sec |

#### 10.1.4

##### Allocation of Effluents from Common Release Points

Radioactive gaseous effluents released from the auxiliary building, miscellaneous ventilation systems and the gas decay tanks are comprised of contributions from both units. Consequently, allocation is made evenly between units.

## 10.1.5 Dose Projections for Batch Releases

Dose projections are not made prior to release. Doses are calculated after purging the containment or venting the waste gas decay tanks. Per procedure, representative samples are obtained and analyzed, and the doses calculated on a monthly basis to verify compliance with 10CFR50.

## 10.2 LIQUID RELEASES

## 10.2.1 System Description

A simplified liquid effluent flow diagram is provided in Figure 10-3. A simplified liquid waste processing diagram is provided in Figure 10-2.

The liquid radwaste treatment system is designed and installed to reduce radioactive liquid effluents by collecting the liquids, providing for retention or holdup, and providing for treatment by demineralizer or a concentrator for the purpose of reducing the total radioactivity prior to release to the environment. The system is described in Section 11.2.2 of the Byron/Braidwood Updated Final Safety Analysis Report.

## 10.2.1.1 Release Tanks

There are two radwaste release tanks (OWX01T - 33,100 gallon capacity, and OWX26T - 33750 gallon capacity) which receive liquid waste before discharge to the Kankakee river.

## 10.2.2 Radiation Monitors

## 10.2.2.1 Liquid Radwaste Effluent Monitors

Monitor ORE-PR001 is used to monitor all releases from the release tanks. On high alarm, the monitor automatically initiates closure of valves OWX-353 and OWX-896 to terminate the release.

Pertinent information on the monitor and associated control devices is provided in Byron/Braidwood UFSAR Table 11.5-2.

## 10.2.2.2 Station Blowdown Monitor

Monitor ORE-PR010 continuously monitors the circulating water blowdown. No control device is initiated by this channel.

Pertinent information on this monitor is provided in Byron/Braidwood UFSAR Table 11.5-2.

### 10.2.2.3 Reactor Containment Fan Cooler (RCFC) and Essential Service Water (ESSW) Outlet Line Monitors

Monitors 1RE-PRO2, 2RE-PRO02, 1RE-PRO03, and 2RE-PRO03 continuously monitor the RCFC and ESSW outlet lines.

No control device is initiated by these channels.

Pertinent information on these monitors is provided in Byron/Braidwood UFSAR Table 11.5-2.

## 10.2.3 Alarm and Trip Setpoints

### 10.2.3.1 Setpoint Calculations

Alarm and trip setpoints of liquid effluent monitors at the principal release points are established to ensure that the limits of 10 CFR 20 are not exceeded in the unrestricted area.

#### 10.2.3.1.1 Liquid Radwaste Effluent Monitor

During release the setpoint is established at 1.5 times the analyzed tank activity plus the background reading.

#### 10.2.3.1.2 Station Blowdown Monitor

The monitor setpoint is found by solving equation 10-3.

$$P \leq C^{CW} + (1.25 \times C^T) \times \left( F'_{\max} / (F^{CW} + F'_{\max}) \right) \quad (10-3)$$

P Release Setpoint [μCi/ml]

1.25 Factor to account for minor fluctuations in count rate.

$C^{CW}$  Concentration of activity in the circulating water blowdown at the time of discharge. ("Background reading") [μCi/ml]

$C^T$  Analyzed activity in the release tank [μCi/ml]

$F^{CW}$  Circulating Water Blowdown Rate [gpm]

$F'_{max}$  Maximum Release Tank Discharge Flow Rate [gpm]  
The flow rate from the radwaste discharge tank.

### 10.2.3.2 Discharge Flow Rates

#### 10.2.3.2.1 Release Tank Discharge Flow Rate

Prior to each batch release, a grab sample is obtained.

The results of the analysis of the waste sample determine the discharge rate of each batch as follows:

$$F'_{max} = 0.5(F'_{act} / \sum (C_i^T / MPC_i)) \quad (10-4)$$

The summation is over radionuclides  $i$ .

0.5 Factor for conservatism

$F'_{max}$  Maximum Permitted Discharge Flow Rate [gpm]  
The maximum permitted flow rate from the radwaste discharge tank based on radiological limits (not chemistry limits which may be more restrictive)

$F'_{act}$  Circulating Water Blowdown Rate [gpm]

$C_i^T$  Concentration of Radionuclide  $i$  in the Release Tank [μCi/ml]  
The concentration of radioactivity in the radwaste discharge tank based on measurements of a sample drawn from the tank.

$MPC_i$  Maximum Permissible Concentration of Radionuclide  $i$  [μCi/ml]

### 10.2.3.3 Release Limits

Release limits are determined from 10 CFR 20. Discharge rates and setpoints are adjusted to ensure that 50% of applicable maximum permissible concentrations (MPC) are not exceeded. (See Section 10.2.3.2)

## 10.2.3.4 Release Mixture

For monitors ORE-PR001 and ORE-PR010 the release mixture used for the setpoint determination is the radionuclide mix identified in the grab sample isotopic analysis or the mix in Table 10-2.

For monitors 1RE-PR001, 1RE-PR002, 2RE-PR001, and 2RE-PR002, the release mixture is the radionuclides which are listed in Table 10-2. Each nuclide in the mix is at a concentration which is 10% of the MPC value given in 10 CFR 20 Appendix B, Table II, Column 2.

## 10.2.3.5 Conversion Factors

The readouts for the liquid effluent monitors are in  $\mu\text{Ci}/\text{ml}$ . The cpm to  $\mu\text{Ci}/\text{ml}$  conversion is based on the detector sensitivity to Cs-137.

## 10.2.3.6 Liquid Dilution Flow Rates

Dilution flow rates are obtained from circulating water blowdown transmitter loop OFT-CW032.

## 10.2.4 Allocation of Effluents from Common Release Points

Radioactive liquid effluents released from either release tank (OWX01T or OWX26T) are comprised of contributions from both units. Under normal operating conditions, it is difficult to apportion the radioactivity between the units. Consequently, allocation is made evenly between units.

## 10.2.5 Projected Concentrations for Releases

After determining  $F'_{\text{max}}$  from Equation 10-4, 10 CFR 20 compliance is verified using Equations 10-5 and 10-6.

$$C_i^e = C_i^T [F'_{\text{max}} / (F'_{\text{max}} + F_{\text{act}}^d)] \quad (10-5)$$

$$\sum (C_i^e / \text{MPC}_i) \leq 0.5 \quad (10-6)$$

The summation is over radionuclides  $i$ .

$C_i^e$  Concentration of Radionuclide  $i$  in the Unrestricted Area  $[\mu\text{Ci}/\text{ml}]$

The calculated concentration of radionuclide  $i$  in the unrestricted area as determined by Equation 10-5.

|                    |                                                                                                                                |                     |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------|---------------------|
| $C_i^T$            | Concentration of Radionuclide $i$<br>in the Release Tank                                                                       | $[\mu\text{Ci/ml}]$ |
|                    | The concentration of radioactivity in the<br>radwaste discharge tank based on measurements<br>of a sample drawn from the tank. |                     |
| $\text{MPC}_i$     | Maximum Permissible Concentration<br>of radionuclide $i$                                                                       | $[\mu\text{Ci/ml}]$ |
| $F_{\text{max}}^r$ | Maximum Release Tank Discharge<br>Flow Rate                                                                                    | $[\text{gpm}]$      |
| $F_{\text{ect}}^d$ | Circulating Water Blowdown Rate                                                                                                | $[\text{gpm}]$      |
| 0.5                | Factor for conservatism                                                                                                        |                     |

## 10.3

## SOLIDIFICATION OF WASTE/PROCESS CONTROL PROGRAM

The process control program (PCP) contains the sampling, analysis, and formulation determination by which solidification of radioactive wastes from liquid systems is ensured.

Figure 10-4 is a simplified diagram of solid radwaste processing.

Table 10-1

Assumed Composition of the Braidwood Station  
Noble Gas Effluent


| <u>Isotope</u> | <u>Percent of<br/>Total Annual Release</u> |
|----------------|--------------------------------------------|
| Ar-41          | 00.89                                      |
| Kr-85m         | 00.18                                      |
| Kr-85          | 24.9                                       |
| Kr-87          | 00.04                                      |
| Kr-88          | 00.28                                      |
| Xe-131m        | 01.4                                       |
| Xe-133m        | 00.57                                      |
| Xe-133         | 71.1                                       |
| Xe-135         | 00.53                                      |
| Xe-138         | 00.04                                      |

Table 10-2

Assumed Composition of the Braidwood Station Liquid Effluent

| Isotope | Concentration<br>( $\mu\text{Ci/ml}$ ) | Isotope | Concentration<br>( $\mu\text{Ci/m}^3$ ) |
|---------|----------------------------------------|---------|-----------------------------------------|
| Ru-103  | 8.00E - 06                             | Mn-54   | 1.00E - 05                              |
| Ag-110m | 3.00E - 06                             | Fe-59   | 5.00E - 06                              |
| Te-127  | 2.00E - 05                             | Co-58   | 9.00E - 06                              |
| Te-129m | 2.00E - 06                             | Co-60   | 3.00E - 06                              |
| Te-131m | 4.00E - 06                             | Rb-86   | 2.00E - 06                              |
| Te-132  | 2.00E - 06                             | Zr-95   | 6.00E - 06                              |
| I-130   | 3.00E - 07                             | Nb-95   | 1.00E - 05                              |
| I-131   | 3.00E - 08                             | Mo-99   | 4.00E - 06                              |
| I-132   | 8.00E - 07                             |         |                                         |
| I-133   | 1.00E - 07                             |         |                                         |
| I-135   | 4.00E - 07                             |         |                                         |
| Cs-134  | 9.00E - 07                             |         |                                         |
| Cs-136  | 9.00E - 06                             |         |                                         |
| Cs-137  | 2.00E - 06                             |         |                                         |
| Ce-144  | 1.00E - 06                             |         |                                         |
| Np-239  | 1.00E - 05                             |         |                                         |


THIS PAGE IS INTENTIONALLY LEFT BLANK

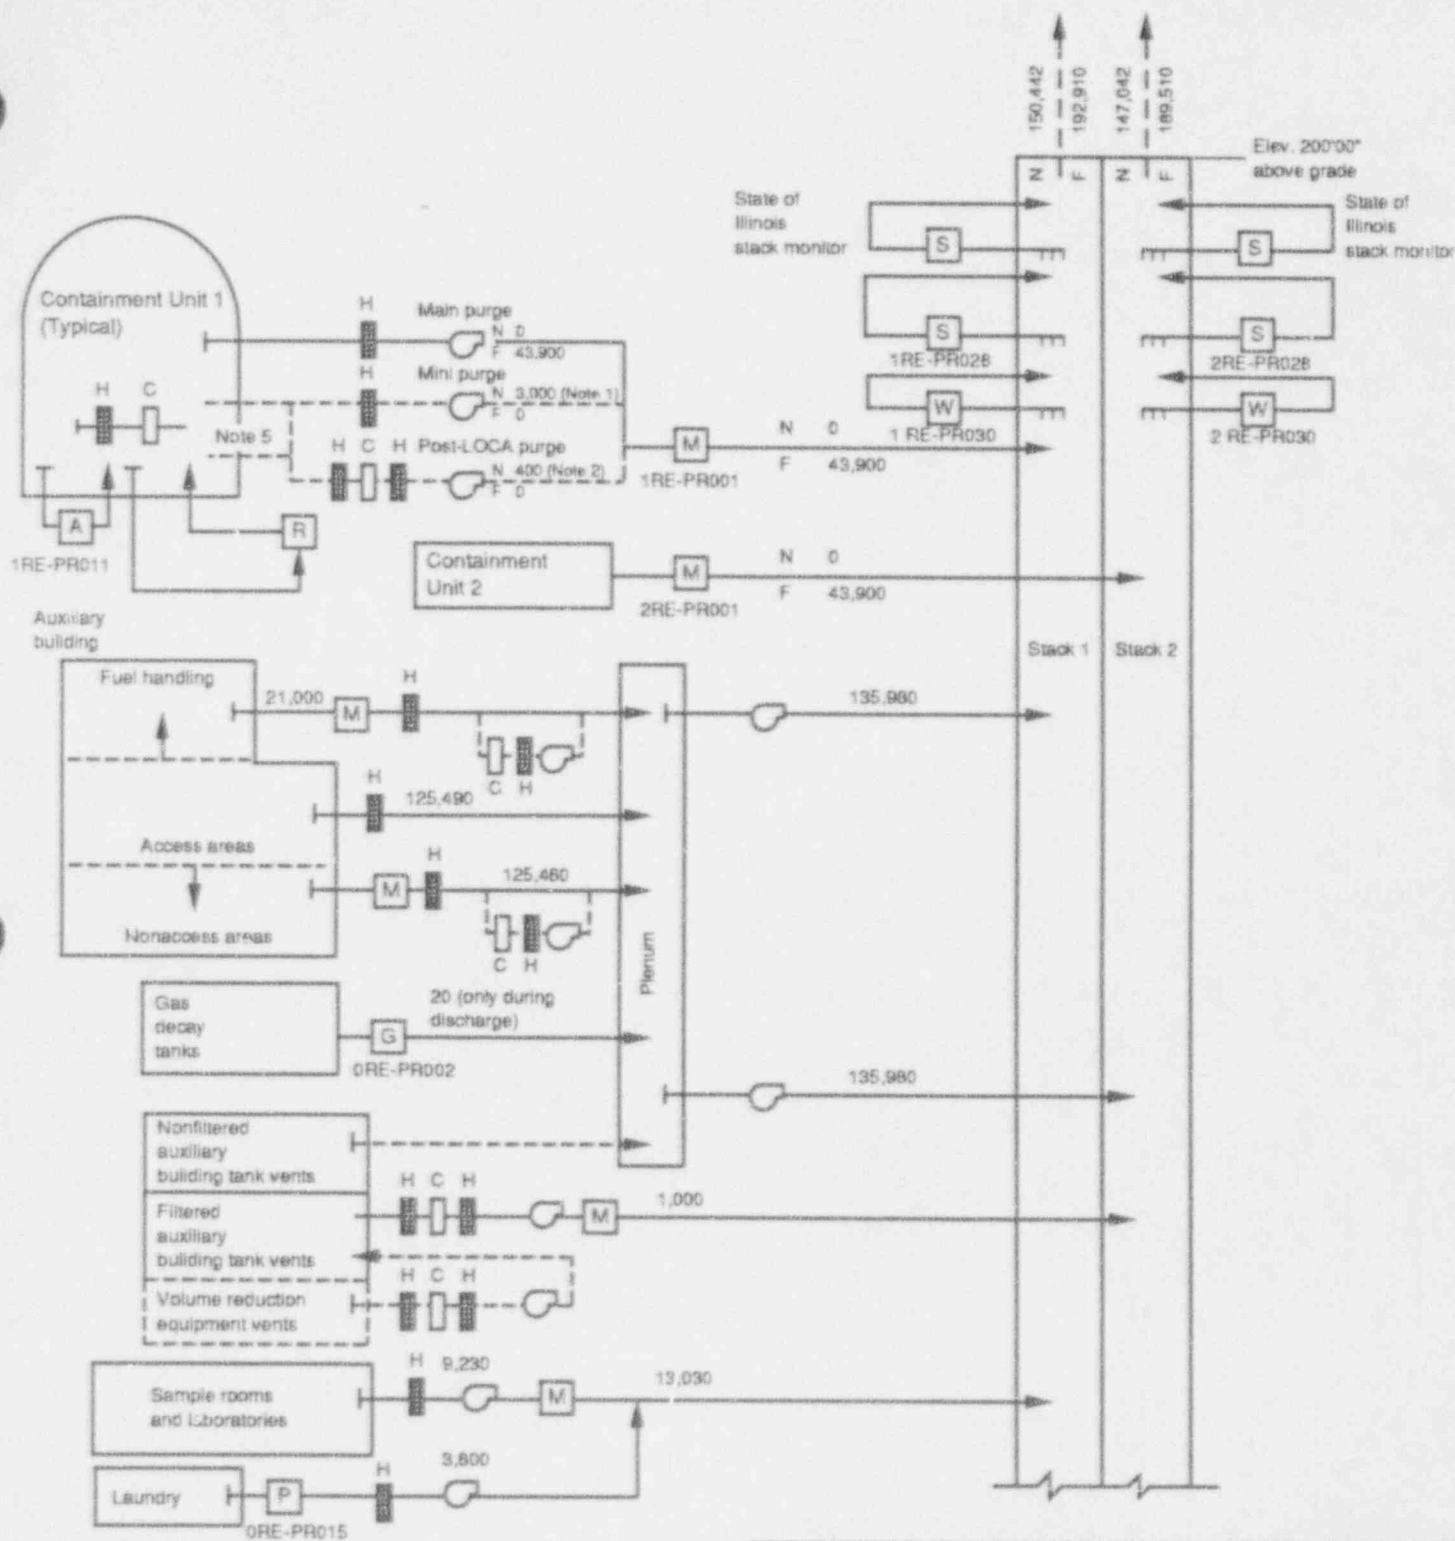

OFFSITE DOSE CALCULATION MANUAL  
BRAIDWOOD STATION

FIGURE 10-1

SIMPLIFIED HVAC AND GASEOUS  
EFFLUENT FLOW DIAGRAM  
(SHEET 1 OF 2)

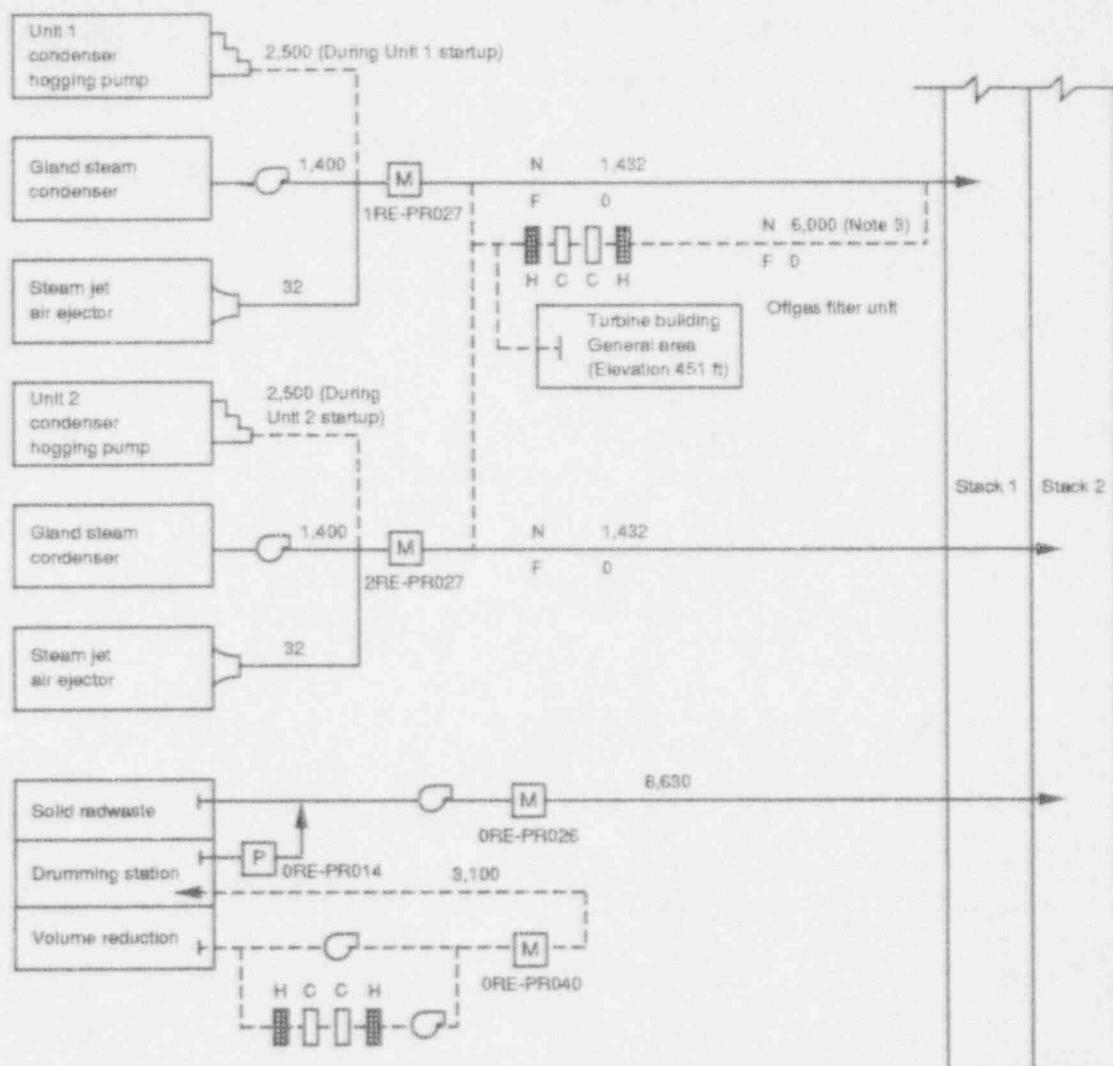

#### Legend

- Normal or frequent flow path
- - - Occasional flow path
- A Containment atmosphere radiation monitor
- C Charcoal filter
- F Refueling
- G Noble gas radiation monitor (offline)
- H HEPA filter
- M Three-channel radiation monitor for particulate, iodine, and noble gas (offline)
- N Normal operation
- P particulate monitor (offline)
- R Hydrogen recombiner
- S Normal range stack radiation monitor (particulate, iodine, and noble gas)
- W Wide-range stack noble radiation monitor


#### Notes

1. Used intermittently to vent containment during normal operation.
2. Used only during postaccident operation.
3. Filter unit operates only when high radiation is detected in offgas system effluent.
4. All flow rates are design flow rates in cubic feet per minute.
5. Integrated Leak Rate Test (ILRT) pressure relief point (an alternate release point that is seldom used).

### OFFSITE DOSE CALCULATION MANUAL BRAIDWOOD STATION


FIGURE 10-1


SIMPLIFIED HVAC AND GASEOUS  
EFFLUENT FLOW DIAGRAM  
(SHEET 2 OF 2)

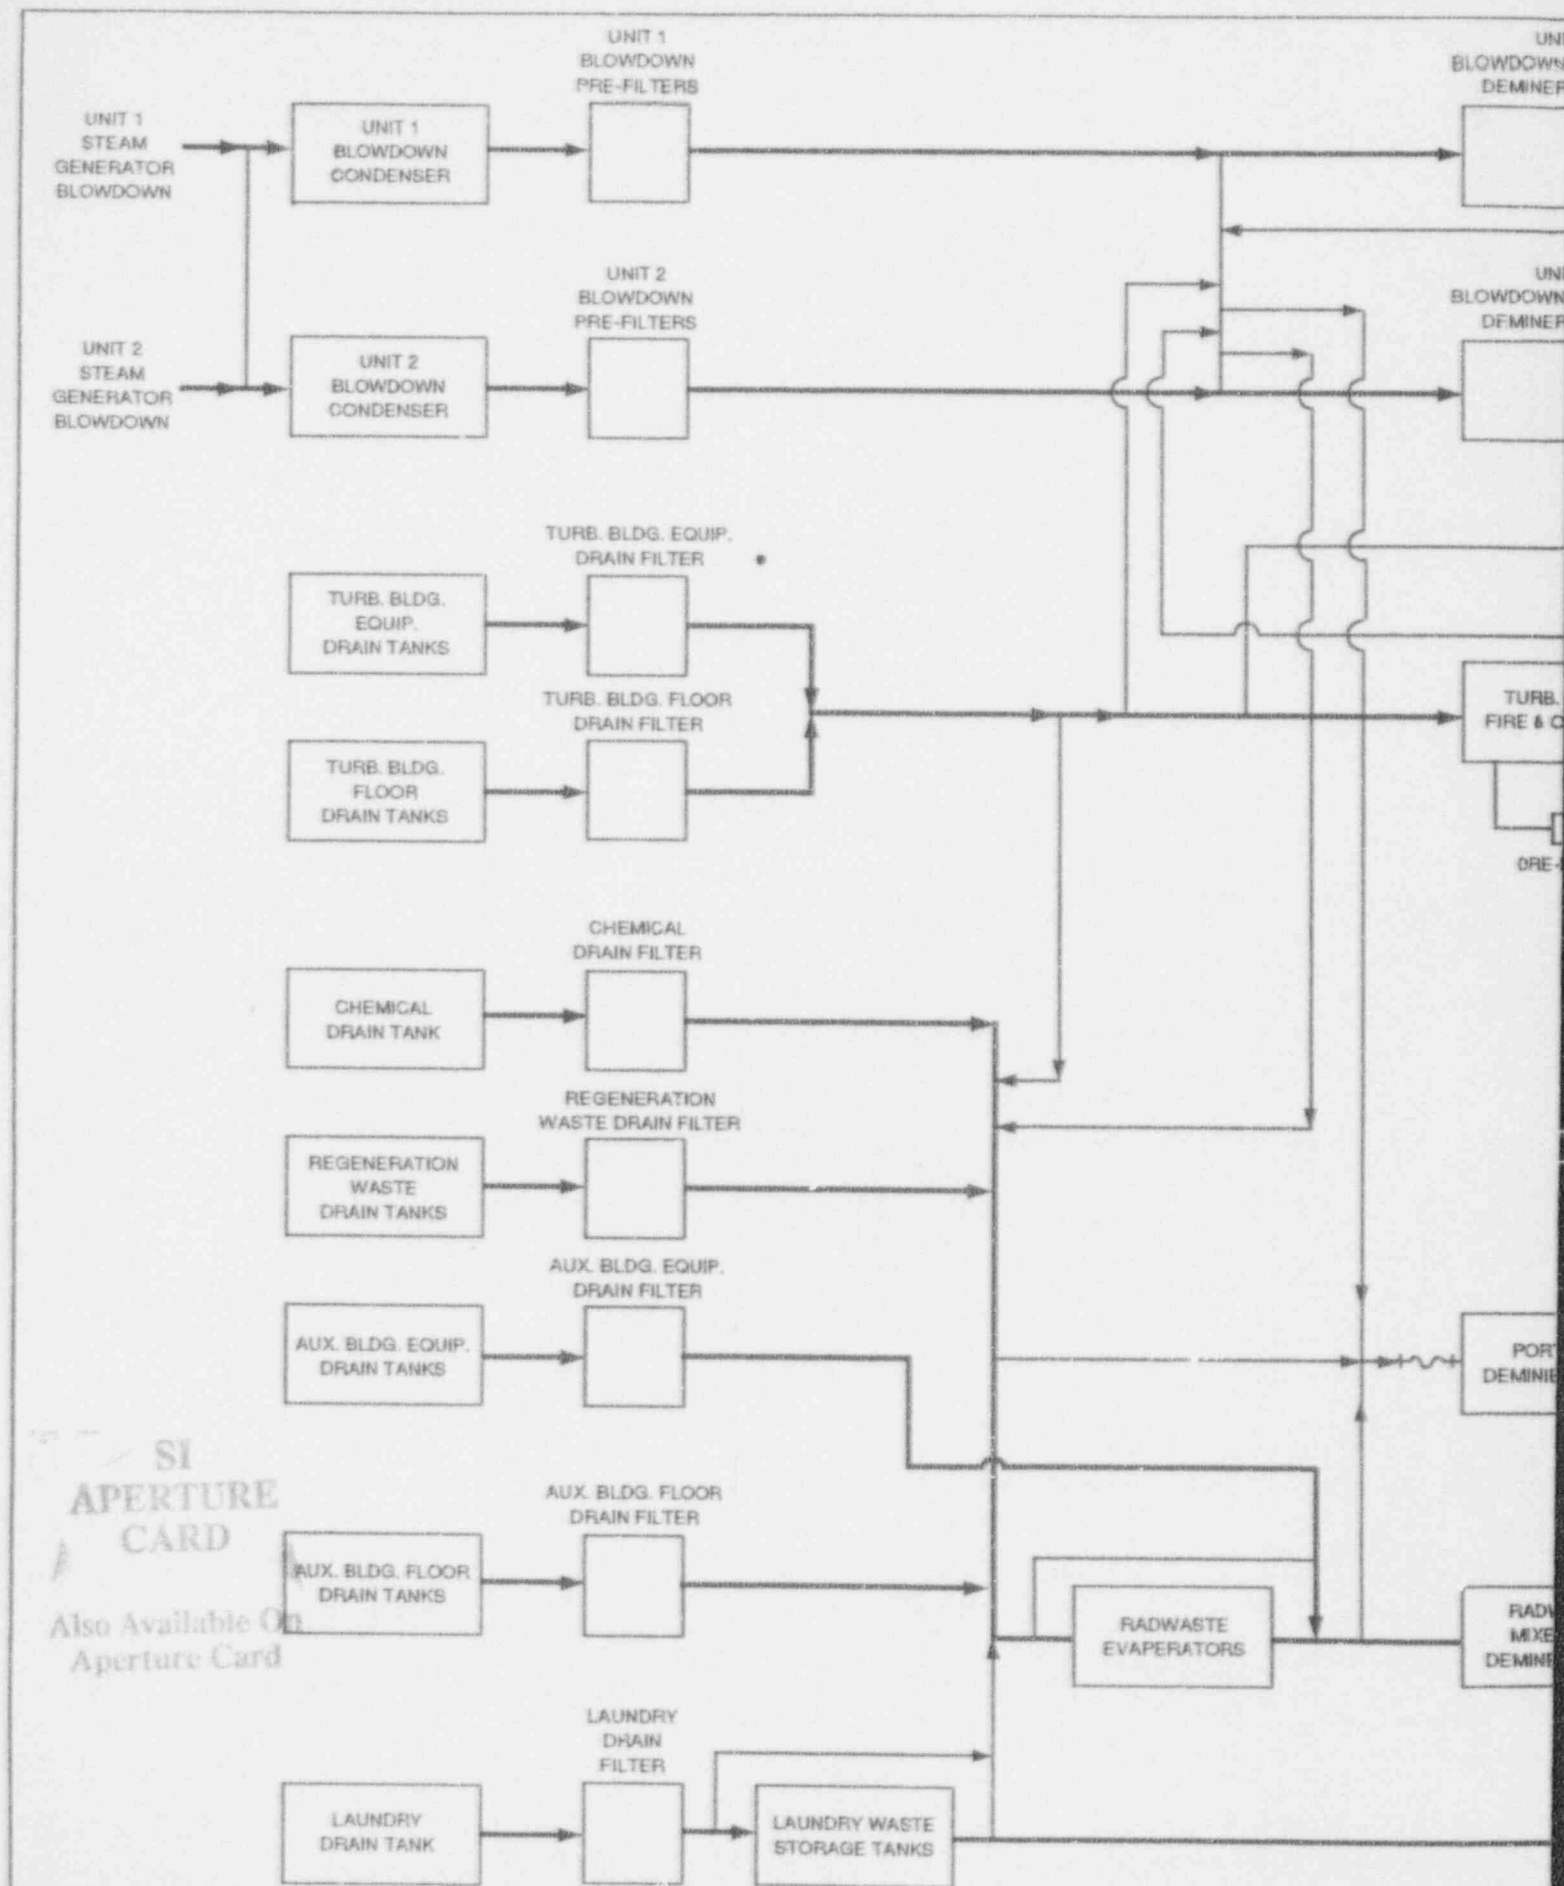


SI  
APERTURE  
CARD

Also Available On  
Aperture Card

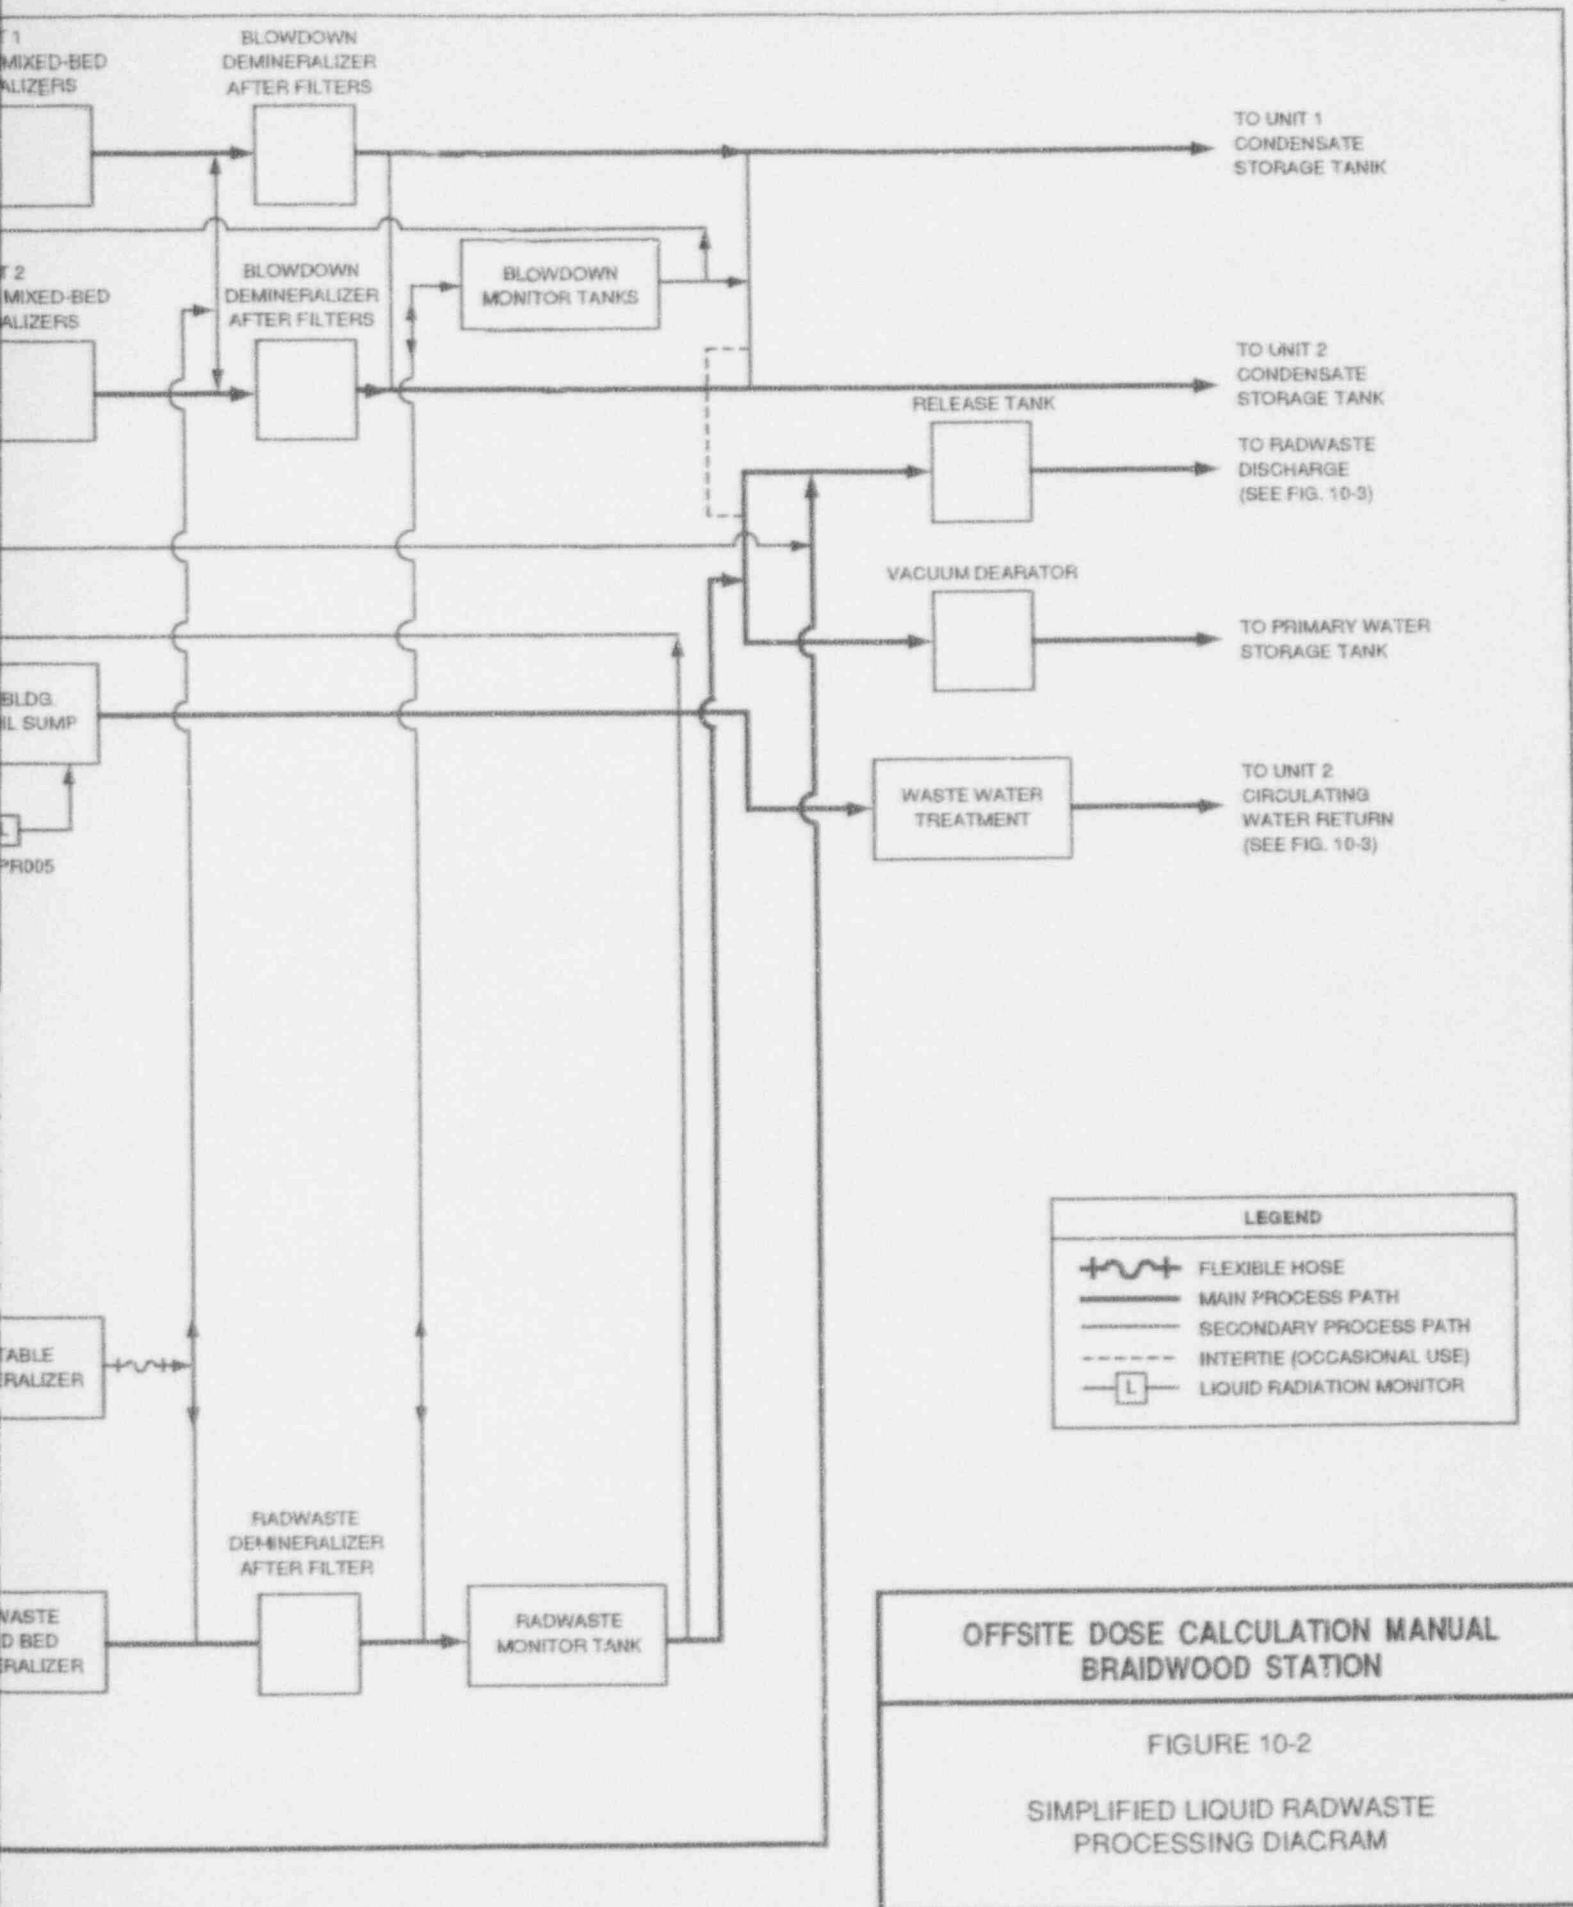

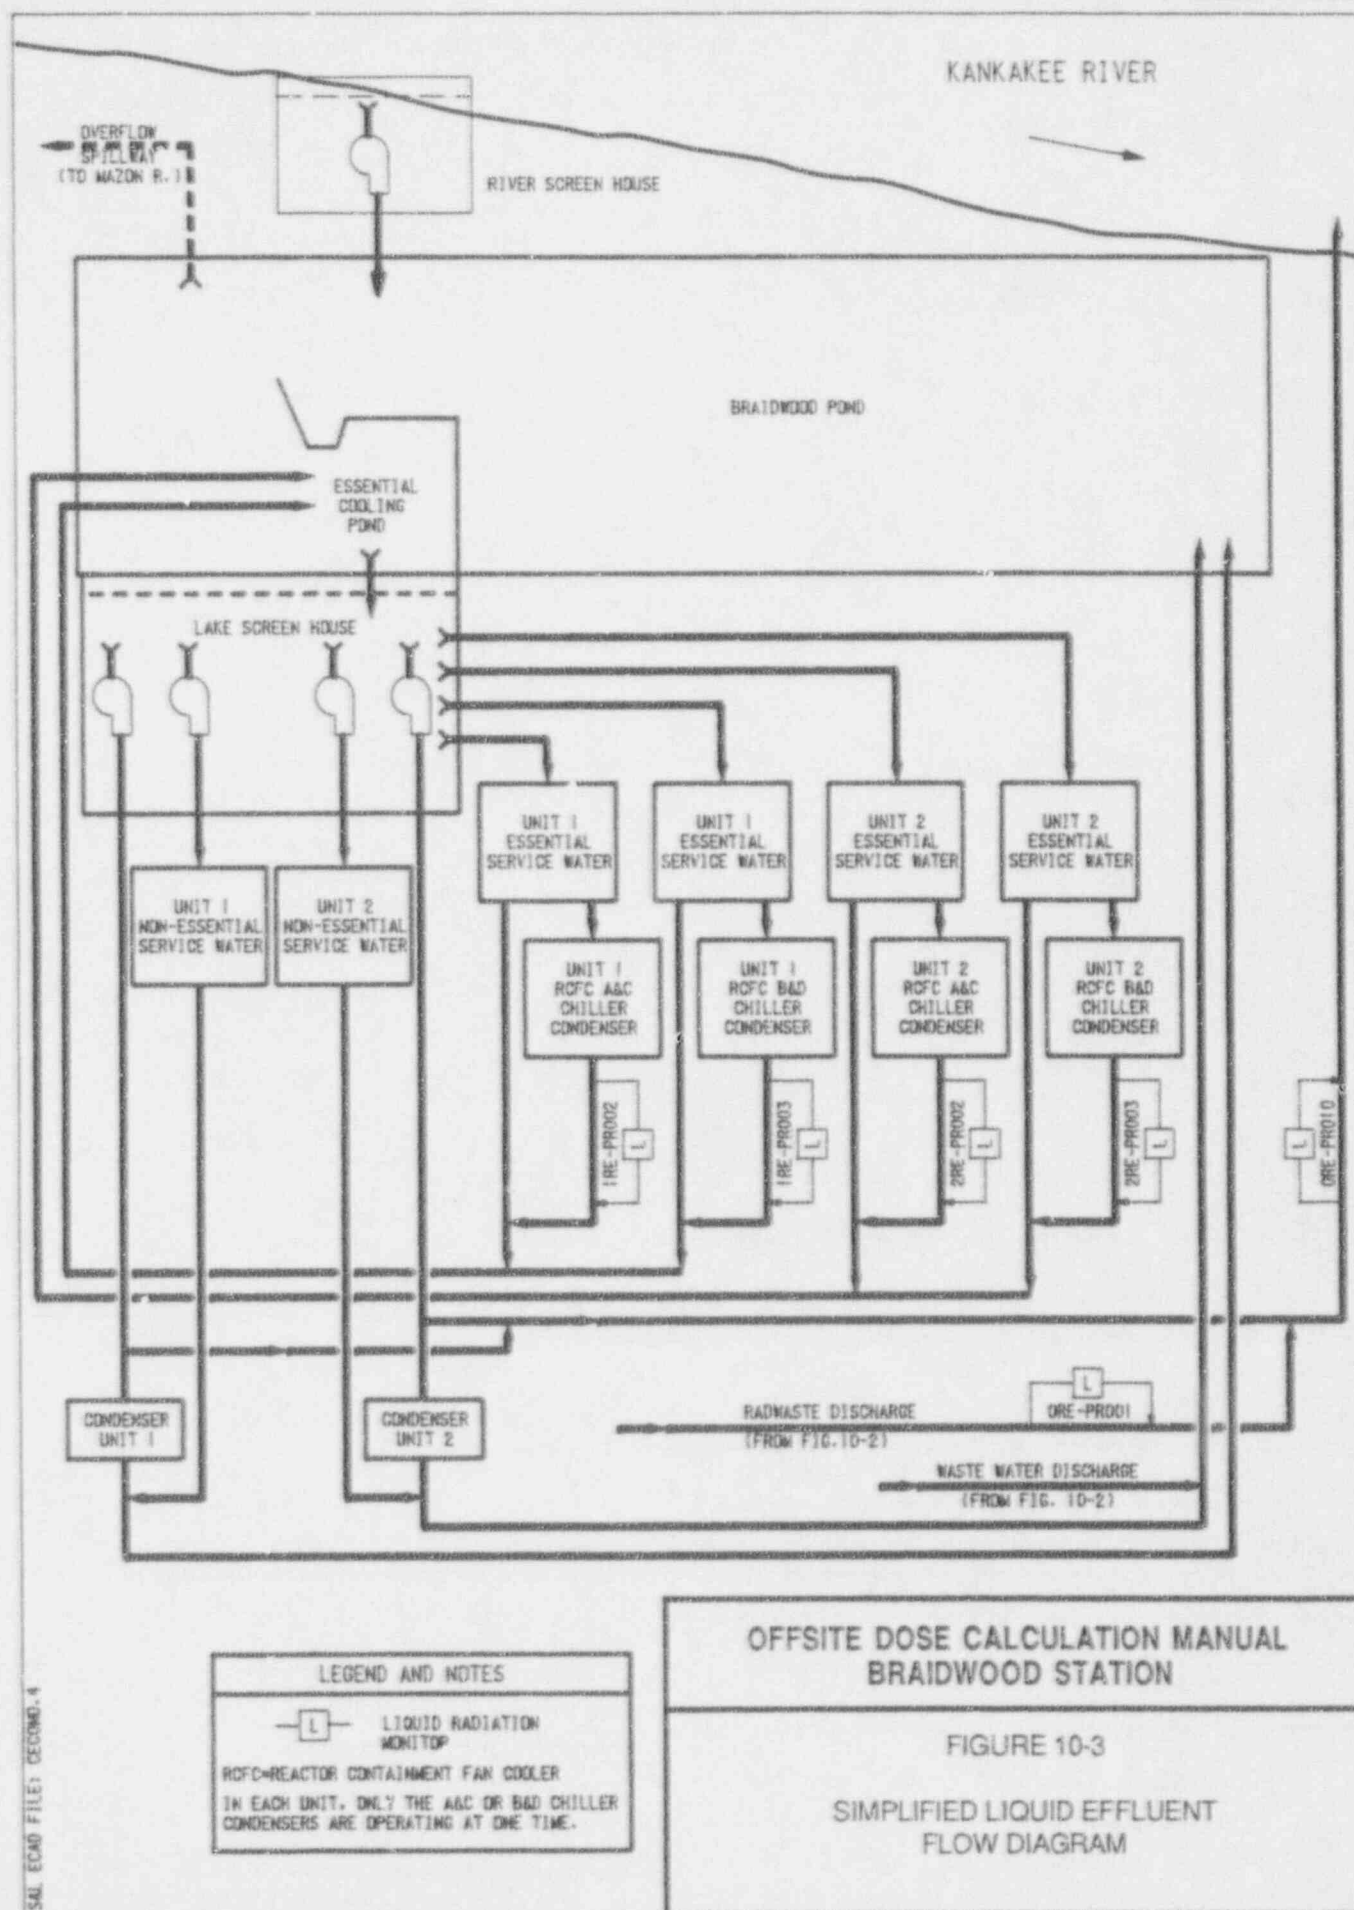

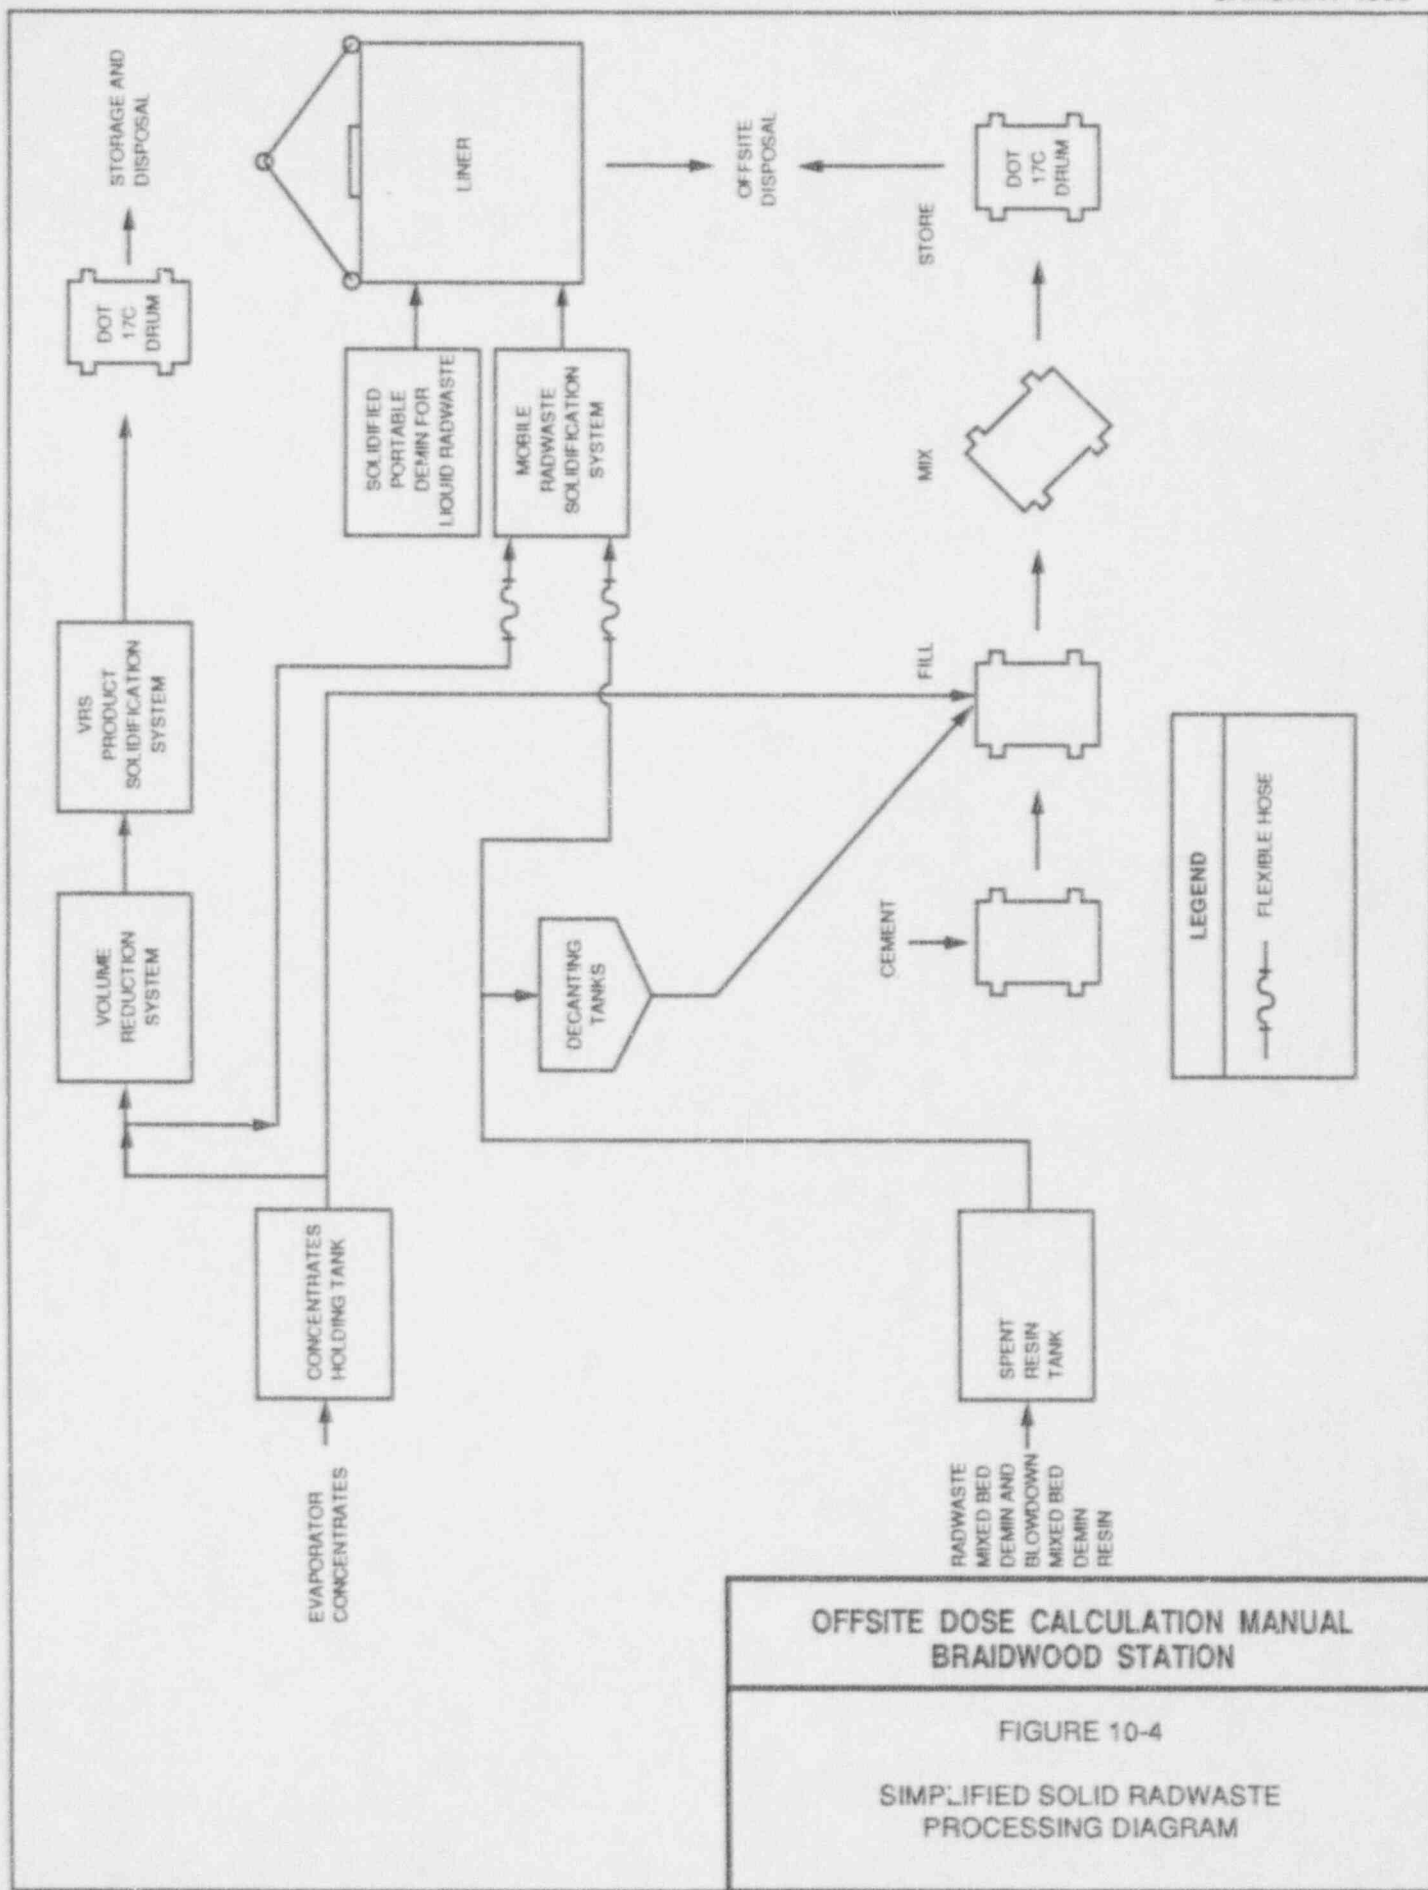

OFFSITE DOSE CALCULATION MANUAL  
BRAIDWOOD STATION

FIGURE 10-4

SIMPLIFIED SOLID RADWASTE  
PROCESSING DIAGRAM

## GENERIC BRAIDWOOD ANNEX INDEX

PAGE      REVISION

## APPENDIX F

|       |     |
|-------|-----|
| F-i   | O.K |
| F-ii  | O.A |
| F-iii | O.A |
| F-iv  | O.A |
| F-1   | O   |
| F-2   | O.K |
| F-3   | O.K |
| F-4   | O.A |
| F-5   | O.K |
| F-6   | O.K |
| F-7   | O.K |
| F-8   | O.K |
| F-9   | O.K |
| F-10  | O.K |
| F-11  | O.K |
| F-12  | O.K |
| F-13  | O.K |
| F-14  | O.K |
| F-15  | O.K |
| F-16  | O.K |
| F-17  | O.K |
| F-18  | O.K |
| F-19  | O.K |
| F-20  | O.K |
| F-21  | O.K |
| F-22  | O.K |
| F-23  | O   |

APPENDIX F  
STATION-SPECIFIC DATA FOR BRAIDWOOD  
UNITS 1 AND 2  
TABLE OF CONTENTS

|     |              | <u>PAGE</u> |
|-----|--------------|-------------|
| F.1 | INTRODUCTION | F-1         |
| F.2 | REFERENCES   | F-1         |

APPENDIX F  
LIST OF TABLES

| <u>NUMBER</u> | <u>TITLE</u>                                                            | <u>PAGE</u> |
|---------------|-------------------------------------------------------------------------|-------------|
| F-1           | Aquatic Environmental Dose Parameters                                   | F-2         |
| F-2           | Station Characteristics                                                 | F-3         |
| F-3           | Critical Ranges                                                         | F-4         |
| F-4           | Average Wind Speeds                                                     | F-5         |
| F-5           | X/Q and D/Q Maxima At or Beyond the<br>Unrestricted Area Boundary       | F-6         |
| F-6           | D/Q at the Nearest Milk Cow and Meat<br>Animal Locations Within 5 Miles | F-7         |
| F-7           | Site Boundary Finite Plume Gamma<br>Dose Factors for Selected Nuclides  | F-8         |

APPENDIX F  
LIST OF FIGURES

| <u>NUMBER</u> | <u>TITLE</u>               | <u>PAGE</u> |
|---------------|----------------------------|-------------|
| F-1           | Unrestricted Area Boundary | F-23        |

APPENDIX F  
STATION-SPECIFIC DATA FOR BRAIDWOOD  
UNITS 1 AND 2

F.1 INTRODUCTION

This appendix contains data relevant to the Braidwood site. Included is a figure showing the unrestricted area boundary and values of parameters used in offsite dose assessment.

F.2 REFERENCES

1. Sargent & Lundy, Nuclear Safeguards and Licensing Division  
Braidwood Calculation No. BR-ER-02, Revs. 0 and 2.

Table F-1  
Aquatic Environment Dose Parameters

| <u>Parameter</u> <sup>a</sup> | <u>Value</u> |
|-------------------------------|--------------|
| $1/M^w, 1/M^f$                | 0.25, 1.0    |
| $F^w, \text{ cfs}$            | 5.63E3       |
| $F^f, \text{ cfs}$            | 5.63E3       |
| $t^f, \text{ hr}^b$           | 24           |
| $t^w, \text{ hr}^c$           | 3            |

Limits on Radioactivity in Unprotected Outdoor Tanks<sup>d</sup>

Primary Water Storage Tank  $\leq 2000 \text{ Ci}^e$

Outside Temporary Tank  $\leq 10 \text{ Ci}^e$

(per Technical Specification 3.11.1.4)

<sup>a</sup> The parameters are defined in Section A.2.1 of Appendix A.

<sup>b</sup>  $t^f \text{ (hr)} = 24 \text{ hr}$  (all stations) for the fish ingestion pathway

<sup>c</sup>  $t^w \text{ (hr)} = 3 \text{ hr}$  (distance to Wilmington is 4 river miles; flow rate of 1.4 mph assumed)

<sup>d</sup> See Section A.2.4 of Appendix A.

<sup>e</sup> Tritium and dissolved or entrained noble gases are excluded from this limit.

Table F-2  
Station Characteristics

STATION: Braidwood

LOCATION: Braceville, Illinois

---

CHARACTERISTICS OF ELEVATED RELEASE POINT: Not Applicable (NA)

1) Release Height = \_\_\_\_\_ m      2) Diameter = \_\_\_\_\_ m  
3) Exit Speed = \_\_\_\_\_  $\text{ms}^{-1}$       4) Heat Content = \_\_\_\_\_  $\text{KCal s}^{-1}$

---

CHARACTERISTICS OF VENT STACK RELEASE POINT

1) Release Height = 60.66  $\text{m}^a$       2) Effective  
Diameter = 2.80 m  
3) Exit Speed = 11.00  $\text{ms}^{-1a}$

---

CHARACTERISTICS OF GROUND LEVEL RELEASE

1) Release Height = 0 m  
2) Building Factor (D) = 60.6  $\text{m}^a$

---

METEOROLOGICAL DATA

A 320 ft Tower is Located 573m NE of vent stack release point

---

Tower Data Used in Calculations

| Release Point  | Wind Speed and Direction | Differential Temperature |
|----------------|--------------------------|--------------------------|
| Elevated _____ | (NA) _____               | (NA) _____               |
| Vent _____     | 203 _____                | 199-30 ft _____          |
| Ground _____   | 34 _____                 | 199-30 ft _____          |

---

<sup>a</sup>Used in calculating the meteorological and dose factors in Tables F-5, F-6, F-7. See Sections B.3 through B.6 of Appendix B.

Table F-3  
Critical Ranges

| Direction | Site<br>Boundary <sup>a</sup><br>(m) | Nearest<br>Resident <sup>b</sup><br>(m) | Nearest Dairy Farm<br>Within 5 Miles <sup>c</sup><br>(m) |
|-----------|--------------------------------------|-----------------------------------------|----------------------------------------------------------|
| N         | 610                                  | 800                                     | None                                                     |
| NNE       | 914                                  | 1100                                    | None                                                     |
| NE        | 792                                  | 1900                                    | None                                                     |
| ENE       | 701                                  | 1800                                    | None                                                     |
| E         | 1036                                 | 1100                                    | 3540                                                     |
| ESE       | 2713                                 | 3500                                    | None                                                     |
| SE        | 3414                                 | 4500                                    | None                                                     |
| SSE       | 3444                                 | 5100                                    | None                                                     |
| S         | 4633                                 | 6300                                    | None                                                     |
| SSW       | 975                                  | 1400                                    | None                                                     |
| SW        | 625                                  | 1100                                    | None                                                     |
| WSW       | 533                                  | 600                                     | None                                                     |
| W         | 518                                  | 500                                     | None                                                     |
| WNW       | 503                                  | 600                                     | None                                                     |
| NW        | 495                                  | 500                                     | 7723                                                     |
| NNW       | 510                                  | 600                                     | None                                                     |

<sup>a</sup>Environmental Report, Table 2.1-1. Used in calculating the meteorological and dose factors in Tables F-5 and F-7. See Sections B.3 through B.6 of Appendix B.

<sup>b</sup>1988 annual survey, Teledyne Isotopes Midwest Laboratories.

<sup>c</sup>Milch animal census, Teledyne Isotopes Midwest Laboratories, 1985. Used in calculating the D/Q values in Table F-6.

Table F-4  
Average Wind Speeds

| <u>Downwind<br/>Direction</u> | <u>Average Wind Speed (m/sec)<sup>a</sup></u> |                   |                     |
|-------------------------------|-----------------------------------------------|-------------------|---------------------|
|                               | <u>Elevated</u>                               | <u>Mixed Mode</u> | <u>Ground Level</u> |
| N                             | 7.6                                           | 6.0               | 4.7                 |
| NNE                           | 7.5                                           | 5.8               | 4.4                 |
| NE                            | 6.1                                           | 5.3               | 3.9                 |
| ENE                           | 6.2                                           | 5.2               | 3.7                 |
| E                             | 6.6                                           | 5.4               | 4.0                 |
| ESE                           | 6.8                                           | 5.6               | 4.3                 |
| SE                            | 6.2                                           | 5.3               | 3.9                 |
| SSE                           | 5.8                                           | 5.2               | 4.1                 |
| S                             | 5.5                                           | 4.9               | 3.6                 |
| SSW                           | 5.5                                           | 5.0               | 3.7                 |
| SW                            | 5.3                                           | 4.8               | 3.3                 |
| WSW                           | 4.7                                           | 4.2               | 2.4                 |
| W                             | 5.4                                           | 4.4               | 2.2                 |
| WNW                           | 6.0                                           | 4.6               | 2.4                 |
| NW                            | 6.0                                           | 4.8               | 3.1                 |
| NNW                           | 6.8                                           | 5.4               | 3.9                 |

<sup>a</sup>Based on Byron site meteorological data, January 1978 through December 1987. Calculated in Reference 1 of Section F.2, using formulas in Section B.1.3 of Appendix B.

<sup>b</sup>The elevated and ground level values are provided for reference purposes only. Routine dose calculations are performed using the mixed mode values.

Table F-5

X/Q and D/Q Maxima at or Beyond the Unrestricted Area Boundary

| Downwind<br>Direction | Mixed Mode (Vent) Release |                   | Ground Level Release |                   |
|-----------------------|---------------------------|-------------------|----------------------|-------------------|
|                       | Radius<br>(meters)        | X/Q<br>(sec/m**3) | Radius<br>(meters)   | X/Q<br>(sec/m**3) |
| N                     | 610.                      | 1.159E-06         | 610.                 | 4.638E-06         |
| NNE                   | 914.                      | 5.056E-07         | 914.                 | 1.776E-06         |
| NE                    | 792.                      | 2.977E-07         | 792.                 | 1.730E-06         |
| ENE                   | 701.                      | 4.273E-07         | 701.                 | 2.170E-06         |
| E                     | 1036.                     | 3.095E-07         | 1036.                | 1.500E-06         |
| ESE                   | 2713.                     | 1.063E-07         | 2713.                | 3.977E-07         |
| SE                    | 3414.                     | 7.561E-08         | 3414.                | 2.746E-07         |
| SSE                   | 3444.                     | 5.021E-08         | 3444.                | 2.157E-07         |
| S                     | 4633.                     | 4.060E-08         | 4633.                | 1.743E-07         |
| SSW                   | 975.                      | 1.918E-07         | 975.                 | 1.329E-06         |
| SW                    | 525.                      | 5.232E-07         | 525.                 | 3.544E-06         |
| WSW                   | 533.                      | 8.335E-07         | 533.                 | 5.841E-06         |
| W                     | 518.                      | 8.886E-07         | 518.                 | 5.892E-06         |
| WNW                   | 503.                      | 1.076E-06         | 503.                 | 6.464E-06         |
| NW                    | 495.                      | 1.080E-06         | 495.                 | 5.492E-06         |
| NNW                   | 510.                      | 1.096E-06         | 510.                 | 5.408E-06         |

Braidwood Site Meteorological Data 1/78 - 12/87

Note: Based on Reference 1 of Section F.2 and the formulas in Sections B.3 and B.4 of Appendix B.

<sup>a</sup>The elevated (stack) and ground level release data are provided for reference purposes only. Routine dose calculations are performed using mixed mode (vent) release data.

<sup>b</sup>Approximate distance from midpoint between gaseous effluent release points to location of highest X/Q or D/Q at or beyond the unrestricted area boundary.

Table F-6  
D/Q at the Nearest Milk Cow and Meat Animal Locations Within 5 Miles

| Downwind Direction | Nearest Radius (meters) | Milk Cow D/Q (1/m**2) Mixed Release | Ground Release | Nearest Radius (meters) | Meat Animal D/Q (1/m**2) Mixed Release | Ground Release |
|--------------------|-------------------------|-------------------------------------|----------------|-------------------------|----------------------------------------|----------------|
| N                  | 8045                    | 2.658E-10                           | 4.042E-10      | 3702                    | 1.000E-09                              | 1.609E-09      |
| NNE                | 8045                    | 2.137E-10                           | 3.188E-10      | 5472                    | 4.146E-10                              | 6.361E-10      |
| NE                 | 8045                    | 1.321E-10                           | 1.995E-10      | 5311                    | 2.654E-10                              | 4.196E-10      |
| ENE                | 8045                    | 1.293E-10                           | 1.967E-10      | 4667                    | 3.199E-10                              | 5.204E-10      |
| E                  | 3540                    | 6.188E-10                           | 1.043E-09      | 4506                    | 4.213E-10                              | 6.820E-10      |
| ESE                | 8045                    | 1.943E-10                           | 2.845E-10      | 3702                    | 7.114E-10                              | 1.133E-09      |
| SE                 | 8045                    | 1.762E-10                           | 2.371E-10      | 7403                    | 2.032E-10                              | 2.754E-10      |
| SSE                | 8045                    | 1.576E-10                           | 2.247E-10      | 5472                    | 3.013E-10                              | 4.482E-10      |
| S                  | 8045                    | 1.063E-10                           | 1.687E-10      | 8045                    | 1.063E-10                              | 1.687E-10      |
| SSW                | 8045                    | 1.160E-10                           | 1.740E-10      | 8045                    | 1.160E-10                              | 1.740E-10      |
| SW                 | 8045                    | 1.404E-10                           | 1.902E-10      | 4828                    | 3.252E-10                              | 4.740E-10      |
| WSW                | 8045                    | 1.132E-10                           | 1.924E-10      | 5955                    | 1.867E-10                              | 3.301E-10      |
| W                  | 8045                    | 9.608E-11                           | 1.707E-10      | 6276                    | 1.460E-10                              | 2.665E-10      |
| WNW                | 8045                    | 9.197E-11                           | 1.706E-10      | 6745                    | 9.197E-11                              | 1.706E-10      |
| NW                 | 7723                    | 1.333E-10                           | 2.375E-10      | 2735                    | 7.257E-10                              | 1.489E-09      |
| NNW                | 8045                    | 1.623E-10                           | 2.753E-10      | 8045                    | 1.623E-10                              | 2.753E-10      |

Braidwood Site Meteorological

7/87

Note: Based on Reference 1 of Section F.2 and the formulas in Section B.4 of Appendix B.

<sup>a</sup>Approximate distance from center of plant as determined by annual census.

<sup>b</sup>The elevated and ground level release data are provided for reference purposes only. Routine dose calculations are performed using mixed mode release data.

<sup>c</sup>Approximate distance from center of plant per ER Table QER470.1-1 (Amendment 2, July 1983).

Table F-7

## Site Boundary Finite Plume Gamma Dose Factors for Kr-83m

| Downwind Direction | Unrestricted Area Bound (meters) | Mixed Mode(Vent) Radius (meters) | Release V (mrad/yr)/(uCi/sec) | VBAR (mrad/yr)/(uCi/sec) | Radius (meters) | Ground Level Rel G (mrad/yr)/(uCi/sec) | Rel se GBAR |
|--------------------|----------------------------------|----------------------------------|-------------------------------|--------------------------|-----------------|----------------------------------------|-------------|
| N                  | 610.                             | 610.                             | 1.455E-04                     | 3.536E-05                | 610.            | 5.333E-04                              | 1.296E-04   |
| NNE                | 914.                             | 914.                             | 6.375E-05                     | 1.549E-05                | 914.            | 2.125E-04                              | 5.164E-05   |
| NE                 | 792.                             | 792.                             | 3.828E-05                     | 9.301E-06                | 792.            | 2.007E-04                              | 4.877E-05   |
| ENE                | 701.                             | 701.                             | 5.294E-05                     | 1.287E-05                | 701.            | 2.575E-04                              | 6.256E-05   |
| E                  | 1036.                            | 1036.                            | 3.703E-05                     | 8.998E-06                | 1036.           | 1.718E-04                              | 4.174E-05   |
| ESE                | 2713.                            | 2713.                            | 1.129E-05                     | 2.744E-06                | 2713.           | 3.792E-05                              | 9.215E-06   |
| SE                 | 3414.                            | 3414.                            | 7.089E-06                     | 1.723E-06                | 3414.           | 2.141E-05                              | 5.202E-06   |
| SSE                | 3444.                            | 3444.                            | 6.047E-06                     | 1.469E-06                | 3444.           | 1.798E-05                              | 4.370E-06   |
| S                  | 4633.                            | 4633.                            | 3.224E-06                     | 7.834E-07                | 4633.           | 9.268E-06                              | 2.252E-06   |
| SSW                | 975.                             | 975.                             | 2.363E-05                     | 5.742E-06                | 975.            | 1.444E-04                              | 3.508E-05   |
| SW                 | 625.                             | 625.                             | 6.030E-05                     | 1.465E-05                | 625.            | 3.762E-04                              | 9.141E-05   |
| WSW                | 533.                             | 533.                             | 9.000E-05                     | 2.187E-05                | 533.            | 6.336E-04                              | 1.540E-04   |
| W                  | 518.                             | 518.                             | 9.909E-05                     | 2.408E-05                | 518.            | 6.292E-04                              | 1.529E-04   |
| WNW                | 503.                             | 503.                             | 1.205E-04                     | 2.927E-05                | 503.            | 6.653E-04                              | 1.617E-04   |
| NW                 | 495.                             | 495.                             | 1.242E-04                     | 3.018E-05                | 495.            | 6.066E-04                              | 1.474E-04   |
| NNW                | 510.                             | 510.                             | 1.322E-04                     | 3.213E-05                | 510.            | 6.144E-04                              | 1.493E-04   |

Braidwood Site Meteorological Data 1/78 - 12/87

Note: Based on Reference 1 of Section F.2 and the formulas in Sections B.5 and B.6 of Appendix B.

aThe elevated (stack) and ground level release data are provided for reference purposes only. Routine dose calculations are performed using mixed mode (vent) release data.

bApproximate distance from midpoint between gaseous effluent release points.

Table F-7 (Cont'd)  
Site Boundary Finite Plume Gamma Dose Factors for Kr-85m

| Downwind Direction | Unrestricted Area Bound (meters) | Mixed Mode(Vent) Radius (meters) | Release V (mrad/yr) | Release VBAR (uCi/sec) | Ground Level Release |             |                |
|--------------------|----------------------------------|----------------------------------|---------------------|------------------------|----------------------|-------------|----------------|
|                    |                                  |                                  |                     |                        | Radius (meters)      | G (mrad/yr) | GBAR (uCi/sec) |
| N                  | 610.                             | 610.                             | 9.989E-04           | 8.285E-04              | 610.                 | 2.731E-03   | 2.242E-03      |
| NNE                | 914.                             | 914.                             | 4.979E-04           | 4.143E-04              | 914.                 | 1.222E-03   | 1.008E-03      |
| NE                 | 792.                             | 792.                             | 3.616E-04           | 3.023E-04              | 792.                 | 1.173E-03   | 9.673E-04      |
| ENE                | 701.                             | 701.                             | 4.452E-04           | 3.710E-04              | 701.                 | 1.363E-03   | 1.121E-03      |
| E                  | 1036.                            | 1036.                            | 3.452E-04           | 2.882E-04              | 1036.                | 1.023E-03   | 8.441E-04      |
| ESE                | 2713.                            | 2713.                            | 1.220E-04           | 1.021E-04              | 2713.                | 3.051E-04   | 2.533E-04      |
| SE                 | 3414.                            | 3414.                            | 8.179E-05           | 6.847E-05              | 3414.                | 1.970E-04   | 1.638E-04      |
| SSE                | 3444.                            | 3444.                            | 6.958E-05           | 5.828E-05              | 3444.                | 1.634E-04   | 1.359E-04      |
| S                  | 4633.                            | 4633.                            | 4.000E-05           | 3.349E-05              | 4633.                | 1.051E-04   | 8.742E-05      |
| SSW                | 975.                             | 975.                             | 2.413E-04           | 2.018E-04              | 975.                 | 9.063E-04   | 7.480E-04      |
| SW                 | 625.                             | 625.                             | 5.268E-04           | 4.392E-04              | 625.                 | 2.019E-03   | 1.659E-03      |
| WSW                | 533.                             | 533.                             | 7.031E-04           | 5.846E-04              | 533.                 | 3.226E-03   | 2.646E-03      |
| W                  | 518.                             | 518.                             | 6.908E-04           | 5.729E-04              | 518.                 | 3.081E-03   | 2.524E-03      |
| WNW                | 503.                             | 503.                             | 7.511E-04           | 6.210E-04              | 503.                 | 3.126E-03   | 2.557E-03      |
| NW                 | 495.                             | 495.                             | 8.386E-04           | 6.959E-04              | 495.                 | 2.915E-03   | 2.388E-03      |
| NNW                | 510.                             | 510.                             | 9.023E-04           | 7.481E-04              | 510.                 | 3.091E-03   | 2.536E-03      |

Braidwood Site Meteorological Data 1/78 - 12/87

Table F-7 (Cont'd)  
Site Boundary Finite Plume Gamma Dose Factors for Kr-85

| Downwind Unrestricted<br>Direction Area Bound<br>(meters) | Mixed Mode(Vent)<br>Radius<br>(meters) | Release<br>V<br>(mrad/yr)/(uCi/sec) | Ground Level Release |                          |
|-----------------------------------------------------------|----------------------------------------|-------------------------------------|----------------------|--------------------------|
|                                                           |                                        |                                     | Radius<br>(meters)   | G<br>(mrad/yr)/(uCi/sec) |
| N                                                         | 610.                                   | 1.125E-05                           | 610.                 | 2.986E-05                |
| NNE                                                       | 914.                                   | 5.661E-06                           | 914.                 | 1.344E-05                |
| NE                                                        | 792.                                   | 4.192E-06                           | 792.                 | 1.311E-05                |
| ENE                                                       | 701.                                   | 5.150E-06                           | 701.                 | 1.486E-05                |
| E                                                         | 1036.                                  | 4.044E-06                           | 1036.                | 1.145E-05                |
| ESE                                                       | 2713.                                  | 1.468E-06                           | 2713.                | 3.702E-06                |
| SE                                                        | 3414.                                  | 1.025E-06                           | 3414.                | 2.620E-06                |
| SSE                                                       | 3444.                                  | 8.593E-07                           | 3444.                | 2.101E-06                |
| S                                                         | 4633.                                  | 5.432E-07                           | 4633.                | 1.699E-06                |
| SSW                                                       | 975.                                   | 2.853E-06                           | 975.                 | 1.042E-05                |
| SW                                                        | 625.                                   | 6.177E-06                           | 625.                 | 2.259E-05                |
| WSW                                                       | 533.                                   | 8.227E-06                           | 533.                 | 3.577E-05                |
| W                                                         | 518.                                   | 7.924E-06                           | 518.                 | 3.388E-05                |
| WNW                                                       | 503.                                   | 8.499E-06                           | 503.                 | 3.430E-05                |
| NW                                                        | 495.                                   | 9.567E-06                           | 495.                 | 3.174E-05                |
| NNW                                                       | 510.                                   | 1.025E-05                           | 510.                 | 3.393E-05                |

Braidwood Site Meteorological Data 1/78 - 12/87

Table F-7 (Cont'd)  
Site Boundary Finite Plume Gamma Dose Factors for Kr-87

| Downwind Direction | Unrestricted Area Bound (meters) | Mixed Mode Radius (meters) | Mixed Mode (Vent) V (mrad/yr) | Release VBAR (uCi/sec) | Radius (meters) | Ground Level G (mrad/yr) | Release GBAR (uCi/sec) |
|--------------------|----------------------------------|----------------------------|-------------------------------|------------------------|-----------------|--------------------------|------------------------|
| N                  | 610.                             | 610.                       | 3.313E-03                     | 2.861E-03              | 610.            | 8.088E-03                | 6.980E-03              |
| NNE                | 914.                             | 914.                       | 1.650E-03                     | 1.425E-03              | 914.            | 3.649E-03                | 3.150E-03              |
| NE                 | 792.                             | 792.                       | 1.249E-03                     | 1.079E-03              | 792.            | 3.373E-03                | 2.911E-03              |
| ENE                | 701.                             | 701.                       | 1.516E-03                     | 1.310E-03              | 701.            | 4.077E-03                | 3.518E-03              |
| E                  | 1036.                            | 1036.                      | 1.150E-03                     | 9.936E-04              | 1036.           | 2.954E-03                | 2.550E-03              |
| ESE                | 2713.                            | 2713.                      | 3.948E-04                     | 3.411E-04              | 2713.           | 8.084E-04                | 6.979E-04              |
| SE                 | 3414.                            | 3414.                      | 2.559E-04                     | 2.211E-04              | 3414.           | 4.691E-04                | 4.050E-04              |
| SSE                | 3444.                            | 3444.                      | 2.231E-04                     | 1.928E-04              | 3444.           | 4.098E-04                | 3.538E-04              |
| S                  | 4633.                            | 4633.                      | 1.162E-04                     | 1.004E-04              | 4633.           | 2.055E-04                | 1.775E-04              |
| SSW                | 975.                             | 975.                       | 8.253E-04                     | 7.130E-04              | 975.            | 2.477E-03                | 2.138E-03              |
| SW                 | 625.                             | 625.                       | 1.782E-03                     | 1.539E-03              | 625.            | 5.714E-03                | 4.931E-03              |
| WSW                | 533.                             | 533.                       | 2.340E-03                     | 2.022E-03              | 533.            | 9.198E-03                | 7.938E-03              |
| W                  | 518.                             | 518.                       | 2.276E-03                     | 1.966E-03              | 518.            | 8.931E-03                | 7.707E-03              |
| WNW                | 503.                             | 503.                       | 2.431E-03                     | 2.099E-03              | 503.            | 9.052E-03                | 7.812E-03              |
| NW                 | 495.                             | 495.                       | 2.792E-03                     | 2.411E-03              | 495.            | 8.646E-03                | 7.462E-03              |
| NNW                | 510.                             | 510.                       | 2.982E-03                     | 2.575E-03              | 510.            | 9.023E-03                | 7.787E-03              |

Braidwood Site Meteorological Data 1/78 - 12/87

Table F-7 (Cont'd)  
Site Boundary Finite Plume Gamma Dose Factors for Kr-88

| Downwind Direction | Unrestricted Area Bound (meters) | Mixed Mode Radius (meters) | Mode(Vent) V (mrad/yr) | Release VBAR (uCi/sec) | Radius (meters) | Ground Level Release G (mrad/yr) | GBAR (uCi/sec) |
|--------------------|----------------------------------|----------------------------|------------------------|------------------------|-----------------|----------------------------------|----------------|
| N                  | 610.                             | 610.                       | 7.997E-03              | 6.956E-03              | 610.            | 1.968E-02                        | 1.708E-02      |
| NNE                | 914.                             | 914.                       | 4.019E-03              | 3.498E-03              | 914.            | 8.899E-03                        | 7.727E-03      |
| NE                 | 792.                             | 792.                       | 3.059E-03              | 2.665E-03              | 792.            | 8.441E-03                        | 7.329E-03      |
| ENE                | 701.                             | 701.                       | 3.725E-03              | 3.244E-03              | 701.            | 9.870E-03                        | 8.566E-03      |
| E                  | 1036.                            | 1036.                      | 2.878E-03              | 2.507E-03              | 1036.           | 7.394E-03                        | 6.421E-03      |
| ESE                | 2713.                            | 2713.                      | 1.022E-03              | 8.910E-04              | 2713.           | 2.215E-03                        | 1.926E-03      |
| SE                 | 3414.                            | 3414.                      | 6.859E-04              | 5.979E-04              | 3414.           | 1.396E-03                        | 1.214E-03      |
| SSE                | 3444.                            | 3444.                      | 5.929E-04              | 5.169E-04              | 3444.           | 1.185E-03                        | 1.031E-03      |
| S                  | 4633.                            | 4633.                      | 3.301E-04              | 2.878E-04              | 4633.           | 6.987E-04                        | 6.081E-04      |
| SSW                | 975.                             | 975.                       | 2.066E-03              | 1.800E-03              | 975.            | 6.466E-03                        | 5.616E-03      |
| SW                 | 625.                             | 625.                       | 4.447E-03              | 3.873E-03              | 625.            | 1.443E-02                        | 1.253E-02      |
| WSW                | 533.                             | 533.                       | 5.857E-03              | 5.099E-03              | 533.            | 2.300E-02                        | 1.995E-02      |
| W                  | 518.                             | 518.                       | 5.607E-03              | 4.878E-03              | 518.            | 2.205E-02                        | 1.912E-02      |
| WNW                | 503.                             | 503.                       | 5.947E-03              | 5.170E-03              | 503.            | 2.232E-02                        | 1.935E-02      |
| NW                 | 495.                             | 495.                       | 6.814E-03              | 5.927E-03              | 495.            | 2.097E-02                        | 1.818E-02      |
| NNW                | 510.                             | 510.                       | 7.265E-03              | 6.319E-03              | 510.            | 2.215E-02                        | 1.922E-02      |

Braidwood Site Meteorological Data 1/78 - 12/87

Table F-7 (Cont'd)  
Site Boundary Finite Plume Gamma Dose Factors for Kr-89

| Downwind Direction | Unrestricted Area Bound (meters) | Mixed Model Radius (meters) | Release V (mrad/yr) | Release VBAR (uCi/sec) | Radius (meters) | Ground Level Release G (mrad/yr) | Release GBAR (uCi/sec) |
|--------------------|----------------------------------|-----------------------------|---------------------|------------------------|-----------------|----------------------------------|------------------------|
| N                  | 610.                             | 610.                        | 4.32E-03            | 3.740E-03              | 610.            | 7.655E-03                        | 5.519E-03              |
| NNE                | 914.                             | 914.                        | 1.692E-03           | 1.464E-03              | 914.            | 2.645E-03                        | 2.287E-03              |
| NE                 | 792.                             | 792.                        | 1.305E-03           | 1.130E-03              | 792.            | 2.219E-03                        | 1.919E-03              |
| ENE                | 701.                             | 701.                        | 1.577E-03           | 1.365E-03              | 701.            | 3.016E-03                        | 2.608E-03              |
| E                  | 1036.                            | 1036.                       | 9.092E-04           | 7.869E-04              | 1036.           | 1.387E-03                        | 1.200E-03              |
| ESE                | 2713.                            | 2713.                       | 1.140E-04           | 9.868E-05              | 2713.           | 9.720E-05                        | 8.410E-05              |
| SE                 | 3414.                            | 3414.                       | 4.392E-05           | 3.802E-05              | 3414.           | 2.983E-05                        | 2.581E-05              |
| SSE                | 3444.                            | 3444.                       | 3.822E-05           | 3.308E-05              | 3444.           | 3.079E-05                        | 2.654E-05              |
| S                  | 4633.                            | 4633.                       | 9.027E-06           | 7.814E-06              | 4633.           | 6.198E-06                        | 5.363E-06              |
| SSW                | 975.                             | 975.                        | 6.764E-04           | 5.855E-04              | 975.            | 1.066E-03                        | 9.223E-04              |
| SW                 | 625.                             | 625.                        | 1.785E-03           | 1.545E-03              | 625.            | 3.262E-03                        | 2.821E-03              |
| WSW                | 533.                             | 533.                        | 2.159E-03           | 1.868E-03              | 533.            | 5.063E-03                        | 4.378E-03              |
| W                  | 518.                             | 518.                        | 2.170E-03           | 1.879E-03              | 518.            | 4.949E-03                        | 4.280E-03              |
| WNW                | 503.                             | 503.                        | 2.410E-03           | 2.085E-03              | 503.            | 5.589E-03                        | 4.833E-03              |
| NW                 | 495.                             | 495.                        | 3.227E-03           | 2.792E-03              | 495.            | 7.228E-03                        | 6.250E-03              |
| NNW                | 510.                             | 510.                        | 3.714E-03           | 3.214E-03              | 510.            | 7.735E-03                        | 6.688E-03              |

Braidwood Site Meteorological Data 1/78 - 12/87

Table F-7 (Cont'd)  
Site Boundary Finite Plume Gamma Dose Factors for Kr-90

| Downwind Unrestricted<br>Direction Area Bound<br>(meters) | Mixed Mode(Vent)<br>Radius<br>(meters) | Release<br>V<br>(mrad/yr) | Release<br>VBAP<br>(uCi/sec) | Ground Level Release |                          |
|-----------------------------------------------------------|----------------------------------------|---------------------------|------------------------------|----------------------|--------------------------|
|                                                           |                                        |                           |                              | Radius<br>(meters)   | G<br>(mrad/yr) (uCi/sec) |
| N                                                         | 610.                                   | 8.576E-04                 | 7.368E-04                    | 610.                 | 9.142E-04 7.846E-04      |
| NNE                                                       | 914.                                   | 1.453E-04                 | 1.249E-04                    | 914.                 | 1.212E-04 1.040E-04      |
| NE                                                        | 792.                                   | 1.302E-04                 | 1.119E-04                    | 792.                 | 1.132E-04 9.720E-05      |
| ENE                                                       | 701.                                   | 1.874E-04                 | 1.611E-04                    | 701.                 | 1.634E-04 1.403E-04      |
| E                                                         | 1036.                                  | 5.480E-05                 | 4.712E-05                    | 1036.                | 3.996E-05 3.432E-05      |
| ESE                                                       | 2713.                                  | 2.691E-07                 | 2.314E-07                    | 2713.                | 1.795E-07 1.543E-07      |
| SE                                                        | 3414.                                  | 1.662E-08                 | 1.429E-08                    | 3414.                | 6.748E-09 5.802E-09      |
| SSE                                                       | 3444.                                  | 2.647E-08                 | 2.275E-08                    | 3444.                | 2.033E-08 1.747E-08      |
| S                                                         | 4633.                                  | 5.354E-10                 | 4.602E-10                    | 4633.                | 3.704E-10 3.183E-10      |
| SSW                                                       | 975.                                   | 4.411E-05                 | 3.792E-05                    | 975.                 | 3.803E-05 3.265E-05      |
| SW                                                        | 625.                                   | 2.343E-04                 | 2.015E-04                    | 625.                 | 2.074E-04 1.780E-04      |
| WSW                                                       | 533.                                   | 2.628E-04                 | 2.261E-04                    | 533.                 | 2.229E-04 1.914E-04      |
| W                                                         | 518.                                   | 2.822E-04                 | 2.428E-04                    | 518.                 | 1.673E-04 1.436E-04      |
| WNW                                                       | 503.                                   | 3.444E-04                 | 2.962E-04                    | 503.                 | 2.412E-04 2.070E-04      |
| NW                                                        | 495.                                   | 5.611E-04                 | 4.824E-04                    | 495.                 | 5.535E-04 4.750E-04      |
| NNW                                                       | 510.                                   | 8.014E-04                 | 6.886E-04                    | 510.                 | 9.221E-04 7.913E-04      |

Braidwood Site Meteorological Data 1/78 - 12/87

Table F-7 (Cont'd)  
Site Boundary Finite Plume Gamma Dose Factors for Xe-131m

| Downwind Direction | Unrestricted Area Bound (meters) | Mixed Model (Vent) Radius (meters) | Release V (mrad/yr) | Release VBAR (uCi/sec) | Ground Level Radius (meters) | Release G (mrad/yr) | Release GBAR (uCi/sec) |
|--------------------|----------------------------------|------------------------------------|---------------------|------------------------|------------------------------|---------------------|------------------------|
| N                  | 610.                             | 610.                               | 1.355E-04           | 4.542E-05              | 610.                         | 4.922E-04           | 1.537E-04              |
| NNE                | 914.                             | 914.                               | 6.125E-05           | 2.116E-05              | 914.                         | 1.988E-04           | 6.368E-05              |
| NE                 | 792.                             | 792.                               | 3.806E-05           | 1.383E-05              | 792.                         | 1.946E-04           | 6.228E-05              |
| ENE                | 701.                             | 701.                               | 5.153E-05           | 1.816E-05              | 701.                         | 2.358E-04           | 7.430E-05              |
| E                  | 1036.                            | 1036.                              | 3.805E-05           | 1.368E-05              | 1036.                        | 1.677E-04           | 5.382E-05              |
| ESE                | 2713.                            | 2713.                              | 1.232E-05           | 4.592E-06              | 2713.                        | 4.412E-05           | 1.491E-05              |
| SE                 | 3414.                            | 3414.                              | 8.612E-06           | 3.203E-06              | 3414.                        | 3.046E-05           | 1.036E-05              |
| SSE                | 3444.                            | 3444.                              | 6.862E-06           | 2.594E-06              | 3444.                        | 2.387E-05           | 8.166E-06              |
| S                  | 4633.                            | 4633.                              | 4.603E-06           | 1.704E-06              | 4633.                        | 1.914E-05           | 6.553E-06              |
| SSW                | 975.                             | 975.                               | 2.441E-05           | 9.030E-06              | 975.                         | 1.504E-04           | 4.846E-05              |
| SW                 | 625.                             | 625.                               | 6.166E-05           | 2.172E-05              | 625.                         | 3.680E-04           | 1.152E-04              |
| WSW                | 533.                             | 533.                               | 9.058E-05           | 3.099E-05              | 533.                         | 5.049E-04           | 1.874E-04              |
| W                  | 518.                             | 518.                               | 9.576E-05           | 3.200E-05              | 518.                         | 5.874E-04           | 1.814E-04              |
| WNW                | 503.                             | 503.                               | 1.132E-04           | 3.695E-05              | 503.                         | 6.171E-04           | 1.891E-04              |
| NW                 | 495.                             | 495.                               | 1.167E-04           | 3.890E-05              | 495.                         | 5.515E-04           | 1.702E-04              |
| NNW                | 510.                             | 510.                               | 1.244E-04           | 4.156E-05              | 510.                         | 5.698E-04           | 1.772E-04              |

Braidwood Site Meteorological Data 1/78 - 12/87

Table F-7 (Cont'd)  
Site Boundary Finite Plume Gamma Dose Factors for Xe-133m

| Downwind Unrestricted<br>Direction Area Bound<br>(meters) | Mixed Mode(Vent)<br>Radius<br>(meters) | Release<br>V<br>(mrad/yr)/(uCi/sec) | Ground Level<br>Radius<br>(meters) | Release<br>G<br>(mrad/yr)/(uCi/sec) | Ground Level<br>Radius<br>(meters) | Release<br>GBAR<br>(uCi/sec) |
|-----------------------------------------------------------|----------------------------------------|-------------------------------------|------------------------------------|-------------------------------------|------------------------------------|------------------------------|
| N                                                         | 610.                                   | 2.561E-04                           | 1.454E-04                          | 610.                                | 8.256E-04                          | 4.275E-04                    |
| NNE                                                       | 914.                                   | 1.216E-04                           | 7.133E-05                          | 914.                                | 3.481E-04                          | 1.868E-04                    |
| NE                                                        | 792.                                   | 8.185E-05                           | 5.041E-05                          | 792.                                | 3.399E-04                          | 1.822E-04                    |
| ENE                                                       | 701.                                   | 1.055E-04                           | 6.314E-05                          | 701.                                | 4.017E-04                          | 2.106E-04                    |
| E                                                         | 1036.                                  | 8.032E-05                           | 4.898E-05                          | 1036.                               | 2.943E-04                          | 1.584E-04                    |
| ESE                                                       | 2713.                                  | 2.749E-05                           | 1.730E-05                          | 2713.                               | 8.394E-05                          | 4.811E-05                    |
| SE                                                        | 3414.                                  | 1.908E-05                           | 1.199E-05                          | 3414.                               | 5.806E-05                          | 3.350E-05                    |
| SSE                                                       | 3444.                                  | 1.562E-05                           | 9.938E-06                          | 3444.                               | 4.509E-05                          | 2.677E-05                    |
| S                                                         | 4633.                                  | 1.005E-05                           | 6.292E-06                          | 4633.                               | 3.632E-05                          | 2.113E-05                    |
| SSW                                                       | 975.                                   | 5.390E-05                           | 3.370E-05                          | 975.                                | 2.651E-04                          | 1.433E-04                    |
| SW                                                        | 625.                                   | 1.260E-04                           | 7.540E-05                          | 625.                                | 6.188E-04                          | 3.215E-04                    |
| WSW                                                       | 533.                                   | 1.767E-04                           | 1.026E-04                          | 533.                                | 1.004E-03                          | 5.152E-04                    |
| W                                                         | 518.                                   | 1.799E-04                           | 1.018E-04                          | 518.                                | 9.658E-04                          | 4.916E-04                    |
| WNW                                                       | 503.                                   | 2.046E-04                           | 1.124E-04                          | 503.                                | 1.001E-03                          | 5.031E-04                    |
| NW                                                        | 495.                                   | 2.185E-04                           | 1.232E-04                          | 495.                                | 9.067E-04                          | 4.612E-04                    |
| NNW                                                       | 510.                                   | 2.337E-04                           | 1.322E-04                          | 510.                                | 9.487E-04                          | 4.882E-04                    |

Braidwood Site Meteorological Data 1/78 - 12/87

Table F-7 (Cont'd)  
Site Boundary Finite Plume Gamma Dose Factors for Xe-133

| Downwind Direction | Unrestricted Area Bound (meters) | Mixed Mode(Vent) Radius (meters) | Release V (mrad/yr)/(uCi/sec) | Ground Level Release |                            |
|--------------------|----------------------------------|----------------------------------|-------------------------------|----------------------|----------------------------|
|                    |                                  |                                  |                               | Radius (meters)      | G GBAR (mrad/yr)/(uCi/sec) |
| N                  | 610.                             | 610.                             | 2.824E-04                     | 610.                 | 9.100E-04                  |
| NNE                | 914.                             | 914.                             | 1.355E-04                     | 914.                 | 3.891E-04                  |
| NE                 | 792.                             | 792.                             | 9.079E-05                     | 792.                 | 3.804E-04                  |
| ENE                | 701.                             | 701.                             | 1.161E-04                     | 701.                 | 4.450E-04                  |
| E                  | 1036.                            | 1036.                            | 8.914E-05                     | 1036.                | 3.295E-04                  |
| ESE                | 2713.                            | 2713.                            | 3.072E-05                     | 2713.                | 9.583E-05                  |
| SE                 | 3414.                            | 3414.                            | 2.135E-05                     | 3414.                | 6.660E-05                  |
| SSE                | 3444.                            | 3444.                            | 1.740E-05                     | 3444.                | 5.275E-05                  |
| S                  | 4633.                            | 4633.                            | 1.130E-05                     | 4633.                | 4.215E-05                  |
| SSW                | 975.                             | 975.                             | 5.975E-05                     | 975.                 | 2.978E-04                  |
| SW                 | 625.                             | 625.                             | 1.386E-04                     | 625.                 | 6.830E-04                  |
| WSW                | 533.                             | 533.                             | 1.924E-04                     | 533.                 | 1.103E-03                  |
| W                  | 518.                             | 518.                             | 1.965E-04                     | 518.                 | 1.056E-03                  |
| WNW                | 503.                             | 503.                             | 2.231E-04                     | 503.                 | 1.088E-03                  |
| NW                 | 495.                             | 495.                             | 2.383E-04                     | 495.                 | 9.911E-04                  |
| NNW                | 510.                             | 510.                             | 2.563E-04                     | 510.                 | 1.044E-03                  |

Braidwood Site Meteorological Data 1/78 - 12/87

Table F-7 (Cont'd)  
Site Boundary Finite Plume Gamma Dose Factors for Xé-135m

| Downwind Direction | Unrestricted Area Bound (meters) | Mixed Model Radius (meters) | Model (Vent) V (mrad/yr) | Release VBAR ((uCi/sec) | Ground Level Radius (meters) | Ground Level G ((mrad/yr) | Release GBAR ((uCi/sec) |
|--------------------|----------------------------------|-----------------------------|--------------------------|-------------------------|------------------------------|---------------------------|-------------------------|
| N                  | 610.                             | 610.                        | 1.924E-03                | 1.609E-03               | 610.                         | 4.403E-03                 | 3.668E-03               |
| NNE                | 914.                             | 914.                        | 9.071E-04                | 7.594E-04               | 914.                         | 1.913E-03                 | 1.596E-03               |
| NE                 | 792.                             | 792.                        | 6.745E-04                | 5.656E-04               | 792.                         | 1.628E-03                 | 1.358E-03               |
| ENE                | 701.                             | 701.                        | 8.149E-04                | 6.826E-04               | 701.                         | 2.191E-03                 | 1.826E-03               |
| E                  | 1036.                            | 1036.                       | 5.710E-04                | 4.787E-04               | 1036.                        | 1.368E-03                 | 1.142E-03               |
| ESE                | 2713.                            | 2713.                       | 1.557E-04                | 1.306E-04               | 2713.                        | 2.479E-04                 | 2.074E-04               |
| SE                 | 3414.                            | 3414.                       | 8.843E-05                | 7.422E-05               | 3414.                        | 1.163E-04                 | 9.741E-05               |
| SSE                | 3444.                            | 3444.                       | 7.741E-05                | 6.496E-05               | 3444.                        | 1.062E-04                 | 8.896E-05               |
| S                  | 4633.                            | 4633.                       | 3.277E-05                | 2.750E-05               | 4633.                        | 4.020E-05                 | 3.368E-05               |
| SSW                | 975.                             | 975.                        | 4.100E-04                | 3.439E-04               | 975.                         | 1.011E-03                 | 8.443E-04               |
| SW                 | 625.                             | 625.                        | 9.034E-04                | 7.574E-04               | 625.                         | 2.580E-03                 | 2.151E-03               |
| WSW                | 533.                             | 533.                        | 1.154E-03                | 9.673E-04               | 533.                         | 4.266E-03                 | 3.553E-03               |
| W                  | 518.                             | 518.                        | 1.187E-03                | 9.932E-04               | 518.                         | 4.362E-03                 | 3.631E-03               |
| WNW                | 503.                             | 503.                        | 1.304E-03                | 1.090E-03               | 503.                         | 4.495E-03                 | 3.740E-03               |
| NW                 | 495.                             | 495.                        | 1.546E-03                | 1.293E-03               | 495.                         | 4.695E-03                 | 3.908E-03               |
| NNW                | 510.                             | 510.                        | 1.673E-03                | 1.399E-03               | 510.                         | 4.688E-03                 | 3.903E-03               |

Braidwood Site Meteorological Data 1/78 - 12/87

Table F-7 (Cont'd)  
Site Boundary Finite Plume Gamma Dose Factors for Xe-135

| Downwind Unrestricted<br>Direction Area Bound | Mixed Mode(Vent)<br>Radius | Release<br>V<br>(mrad/yr)/(uCi/sec) | Ground Level Release<br>Radius<br>G<br>(meters) | Release<br>GBAR<br>(uCi/sec) |
|-----------------------------------------------|----------------------------|-------------------------------------|-------------------------------------------------|------------------------------|
| N                                             | 610.                       | 1.353E-03                           | 610.                                            | 3.674E-03                    |
| NNE                                           | 914.                       | 6.781E-04                           | 914.                                            | 1.652E-03                    |
| NE                                            | 792.                       | 4.952E-04                           | 792.                                            | 1.599E-03                    |
| ENE                                           | 701.                       | 6.084E-04                           | 701.                                            | 1.833E-03                    |
| E                                             | 1036.                      | 4.753E-04                           | 1036.                                           | 1.395E-03                    |
| ESE                                           | 2713.                      | 1.700E-04                           | 2713.                                           | 4.326E-04                    |
| SE                                            | 3414.                      | 1.160E-04                           | 3414.                                           | 2.914E-04                    |
| SSE                                           | 3444.                      | 9.782E-05                           | 3444.                                           | 2.377E-04                    |
| S                                             | 4633.                      | 5.868E-05                           | 4633.                                           | 1.698E-04                    |
| SSW                                           | 975.                       | 3.328E-04                           | 975.                                            | 1.253E-03                    |
| SW                                            | 625.                       | 7.237E-04                           | 625.                                            | 2.748E-03                    |
| WSW                                           | 533.                       | 9.542E-04                           | 533.                                            | 4.369E-03                    |
| W                                             | 518.                       | 9.408E-04                           | 518.                                            | 4.151E-03                    |
| WNW                                           | 503.                       | 1.018E-03                           | 503.                                            | 4.203E-03                    |
| NW                                            | 495.                       | 1.139E-03                           | 495.                                            | 3.908E-03                    |
| NNW                                           | 510.                       | 1.225E-03                           | 510.                                            | 4.166E-03                    |

Braidwood Site Meteorological Data 1/78 - 12/87

Table F-7 (Cont'd)  
Site Boundary Finite Plume Gamma Dose Factors for Xe-137

| Downwind Direction | Unrestricted Area Bound (meters) | Mixed Mode Radius (meters) | Mode (Verit) V (mrad/yr) | Release VBAR (uCi/sec) | Ground Level Radius (meters) | Release G (mrad/yr) | Release GBAR (uCi/sec) |
|--------------------|----------------------------------|----------------------------|--------------------------|------------------------|------------------------------|---------------------|------------------------|
| N                  | 610.                             | 610.                       | 6.360E-04                | 5.391E-04              | 610.                         | 1.202E-03           | 1.019E-03              |
| NNE                | 914.                             | 914.                       | 2.578E-04                | 2.185E-04              | 914.                         | 4.345E-04           | 3.682E-04              |
| NE                 | 792.                             | 792.                       | 1.950E-04                | 1.653E-04              | 792.                         | 3.640E-04           | 3.085E-04              |
| ENE                | 701.                             | 701.                       | 2.355E-04                | 1.997E-04              | 701.                         | 4.977E-04           | 4.217E-04              |
| E                  | 1036.                            | 1036.                      | 1.407E-04                | 1.193E-04              | 1036.                        | 2.400E-04           | 2.034E-04              |
| ESE                | 2713.                            | 2713.                      | 2.042E-05                | 1.732E-05              | 2713.                        | 1.931E-05           | 1.637E-05              |
| SE                 | 3414.                            | 3414.                      | 8.468E-06                | 7.181E-06              | 3414.                        | 6.393E-06           | 5.419E-06              |
| SSE                | 3444.                            | 3444.                      | 7.384E-06                | 6.262E-06              | 3444.                        | 5.474E-06           | 5.488E-06              |
| S                  | 4633.                            | 4633.                      | 1.951E-06                | 1.654E-06              | 4633.                        | 1.457E-06           | 1.235E-06              |
| SSW                | 975.                             | 975.                       | 1.038E-04                | 8.798E-05              | 975.                         | 1.812E-04           | 1.535E-04              |
| SW                 | 625.                             | 625.                       | 2.625E-04                | 2.226E-04              | 625.                         | 5.373E-04           | 4.553E-04              |
| WSW                | 533.                             | 533.                       | 3.189E-04                | 2.704E-04              | 533.                         | 8.494E-04           | 7.197E-04              |
| W                  | 518.                             | 518.                       | 3.247E-04                | 2.753E-04              | 518.                         | 8.444E-04           | 7.154E-04              |
| WNW                | 503.                             | 503.                       | 3.635E-04                | 3.081E-04              | 503.                         | 9.371E-04           | 7.939E-04              |
| NW                 | 495.                             | 495.                       | 4.763E-04                | 4.043E-04              | 495.                         | 1.167E-03           | 9.885E-04              |
| NNW                | 510.                             | 510.                       | 5.441E-04                | 4.612E-04              | 510.                         | 1.222E-03           | 1.035E-03              |

Braidwood Site Meteorological Data 1/78 - 12/87

Table F-7 (Cont'd)  
Site Boundary Finite Plume Gamma Dose Factors for Xe-138


| Downwind<br>Direction | Unrestricted<br>Area Bound<br>(meters) | Mixed Mode(Vent)<br>Radius<br>(meters) | Release<br>V<br>(mrad/yr) | Release<br>VBAR<br>(uCi/sec) | Ground Level Release |                |                   |
|-----------------------|----------------------------------------|----------------------------------------|---------------------------|------------------------------|----------------------|----------------|-------------------|
|                       |                                        |                                        |                           |                              | Radius<br>(meters)   | G<br>(mrad/yr) | GBAR<br>(uCi/sec) |
| N                     | 610.                                   | 610.                                   | 4.201E-03                 | 3.625E-03                    | 610.                 | 9.169E-03      | 7.900E-03         |
| NNE                   | 914.                                   | 914.                                   | 1.982E-03                 | 1.711E-03                    | 914.                 | 3.986E-03      | 3.436E-03         |
| NE                    | 792.                                   | 792.                                   | 1.504E-03                 | 1.298E-03                    | 792.                 | 3.379E-03      | 2.912E-03         |
| ENE                   | 701.                                   | 701.                                   | 1.805E-03                 | 1.559E-03                    | 701.                 | 4.549E-03      | 3.921E-03         |
| E                     | 1036.                                  | 1036.                                  | 1.262E-03                 | 1.089E-03                    | 1036.                | 2.830E-03      | 2.440E-03         |
| ESE                   | 2713.                                  | 2713.                                  | 3.395E-04                 | 2.932E-04                    | 2713.                | 5.079E-04      | 4.382E-04         |
| SE                    | 3414.                                  | 3414.                                  | 1.926E-04                 | 1.664E-04                    | 3414.                | 2.381E-04      | 2.055E-04         |
| SSE                   | 3444.                                  | 3444.                                  | 1.685E-04                 | 1.455E-04                    | 3444.                | 2.185E-04      | 1.886E-04         |
| S                     | 4633.                                  | 4633.                                  | 7.045E-05                 | 6.086E-05                    | 4633.                | 8.174E-05      | 7.056E-05         |
| SSW                   | 975.                                   | 975.                                   | 9.144E-04                 | 7.898E-04                    | 975.                 | 2.091E-03      | 1.803E-03         |
| SW                    | 625.                                   | 625.                                   | 2.021E-03                 | 1.746E-03                    | 625.                 | 5.325E-03      | 4.589E-03         |
| WSW                   | 533.                                   | 533.                                   | 2.567E-03                 | 2.217E-03                    | 533.                 | 8.769E-03      | 7.556E-03         |
| W                     | 518.                                   | 518.                                   | 2.609E-03                 | 2.252E-03                    | 518.                 | 8.973E-03      | 7.731E-03         |
| WNW                   | 503.                                   | 503.                                   | 2.834E-03                 | 2.445E-03                    | 503.                 | 9.247E-03      | 7.965E-03         |
| NW                    | 495.                                   | 495.                                   | 3.387E-03                 | 2.923E-03                    | 495.                 | 9.733E-03      | 8.385E-03         |
| NNW                   | 510.                                   | 510.                                   | 3.657E-03                 | 3.156E-03                    | 510.                 | 9.712E-03      | 8.367E-03         |

Braidwood Site Meteorological Data 1/78 - 12/87

Table F-7 (Cont'd)  
Site Boundary Finite Plume Gamma Dose Factors for Ar-41

| Downwind Direction | Unrestricted Area Bound (meters) | Mixed Mode Radius (meters) | V (mrad/yr)/(uCi/sec) | Release VBAR (uCi/sec) | Radius (meters) | Ground Level Release |                |
|--------------------|----------------------------------|----------------------------|-----------------------|------------------------|-----------------|----------------------|----------------|
|                    |                                  |                            |                       |                        |                 | G (mrad/yr)          | GBAR (uCi/sec) |
| N                  | 610.                             | 610.                       | 5.141E-03             | 4.580E-03              | 610.            | 1.283E-02            | 1.093E-02      |
| NNE                | 914.                             | 914.                       | 2.568E-03             | 2.188E-03              | 914.            | 5.780E-03            | 4.925E-03      |
| NE                 | 792.                             | 792.                       | 1.935E-03             | 1.649E-03              | 792.            | 5.421E-03            | 4.619E-03      |
| ENE                | 701.                             | 701.                       | 2.357E-03             | 2.008E-03              | 701.            | 5.445E-03            | 5.491E-03      |
| E                  | 1036.                            | 1036.                      | 1.803E-03             | 1.536E-03              | 1036.           | 4.745E-03            | 4.043E-03      |
| ESE                | 2713.                            | 2713.                      | 6.281E-04             | 5.351E-04              | 2713.           | 1.352E-03            | 1.152E-03      |
| SE                 | 3414.                            | 3414.                      | 4.128E-04             | 3.517E-04              | 3414.           | 8.140E-04            | 6.935E-04      |
| SSE                | 3444.                            | 3444.                      | 3.580E-04             | 3.050E-04              | 3444.           | 7.007E-04            | 5.970E-04      |
| S                  | 4633.                            | 4633.                      | 1.924E-04             | 1.639E-04              | 4633.           | 3.770E-04            | 3.212E-04      |
| SSW                | 975.                             | 975.                       | 1.289E-03             | 1.098E-03              | 975.            | 4.067E-03            | 3.465E-03      |
| SW                 | 625.                             | 625.                       | 2.785E-03             | 2.372E-03              | 625.            | 9.244E-03            | 7.876E-03      |
| WSW                | 533.                             | 533.                       | 3.676E-03             | 3.132E-03              | 533.            | 1.482E-02            | 1.263E-02      |
| W                  | 518.                             | 518.                       | 3.562E-03             | 3.035E-03              | 518.            | 1.430E-02            | 1.218E-02      |
| WNW                | 503.                             | 503.                       | 3.806E-03             | 3.243E-03              | 503.            | 1.449E-02            | 1.235E-02      |
| NW                 | 495.                             | 495.                       | 4.350E-03             | 3.706E-03              | 495.            | 1.371E-02            | 1.168E-02      |
| NNW                | 510.                             | 510.                       | 4.647E-03             | 3.959E-03              | 510.            | 1.439E-02            | 1.226E-02      |

Braidwood Site Meteorological Data 1/78 - 12/87

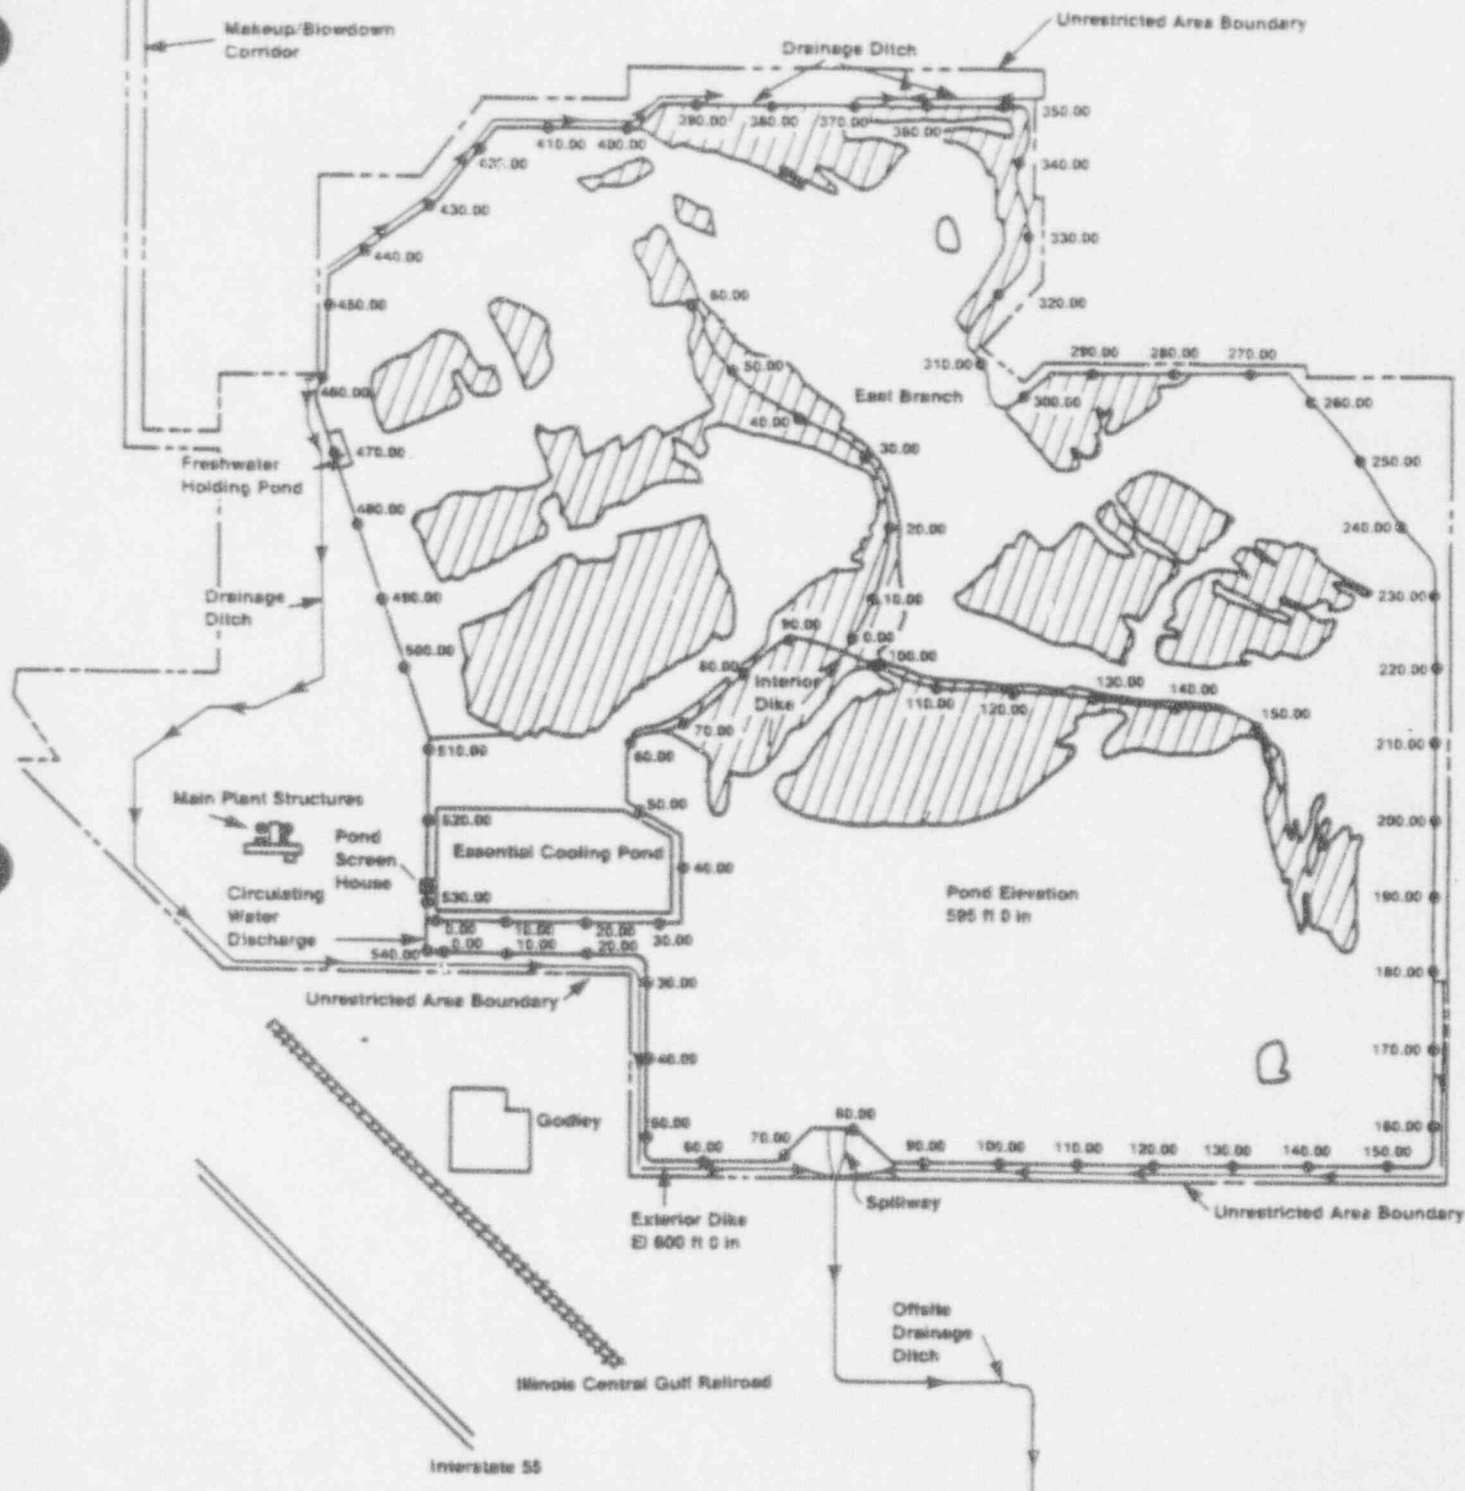

Scale 1000 0 1000 2000 Feet



300 0 600 Meters



# OFFSITE DOSE CALCULATION MANUAL BRAIDWOOD STATION

FIGURE F-1

UNRESTRICTED AREA BOUNDARY