



UNITED STATES  
NUCLEAR REGULATORY COMMISSION  
WASHINGTON, D.C. 20555-0001

VIRGINIA ELECTRIC AND POWER COMPANY

OLD DOMINION ELECTRIC COOPERATIVE

DOCKET NO. 50-338

NORTH ANNA POWER STATION, UNIT NO. 1

AMENDMENT TO FACILITY OPERATING LICENSE

Amendment No. 183  
License No. NPF-4

1. The Nuclear Regulatory Commission (the Commission) has found that:
  - A. The application for amendment by Virginia Electric and Power Company et al., (the licensee) dated October 4, 1993, complies with the standards and requirements of the Atomic Energy Act of 1954, as amended (the Act), and the Commission's rules and regulations set forth in 10 CFR Chapter I;
  - B. The facility will operate in conformity with the application, the provisions of the Act, and the rules and regulations of the Commission;
  - C. There is reasonable assurance (i) that the activities authorized by this amendment can be conducted without endangering the health and safety of the public, and (ii) that such activities will be conducted in compliance with the Commission's regulations;
  - D. The issuance of this amendment will not be inimical to the common defense and security or to the health and safety of the public; and
  - E. The issuance of this amendment is in accordance with 10 CFR Part 51 of the Commission's regulations and all applicable requirements have been satisfied.


2. Accordingly, the license is amended by changes to the Technical Specifications as indicated in the attachment to this license amendment, and paragraph 2.D.(2) of Facility Operating License No. NPF-4 is hereby amended to read as follows:

(2) Technical Specifications

The Technical Specifications contained in Appendices A and B, as revised through Amendment No. 183, are hereby incorporated in the license. The licensee shall operate the facility in accordance with the Technical Specifications.

3. This license amendment is effective as of its date of issuance and shall be implemented within 30 days.

FOR THE NUCLEAR REGULATORY COMMISSION

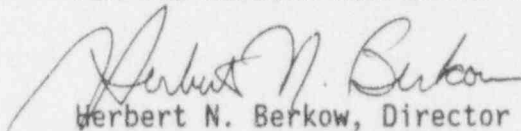

Herbert N. Berkow, Director  
Project Directorate II-2  
Division of Reactor Projects - I/II  
Office of Nuclear Reactor Regulation

Attachment:  
Changes to the Technical  
Specifications

Date of Issuance: May 26, 1994

ATTACHMENT TO LICENSE AMENDMENT NO. 183

TO FACILITY OPERATING LICENSE NO. NPF-4

DOCKET NO. 50-338

Replace the following pages of the Appendix "A" Technical Specifications with the enclosed pages as indicated. The revised pages are identified by amendment number and contain vertical lines indicating the area of change.

Remove Pages

5-4  
6-17a

Insert Pages

5-4  
6-17a

## DESIGN FEATURES

---

### DESIGN PRESSURE AND TEMPERATURE

5.2.2 The reactor containment building is designed and shall be maintained for a maximum internal pressure of 45 psig and a temperature of 280°F.

### 5.3 REACTOR CORE

#### FUEL ASSEMBLIES

5.3.1 The reactor core shall contain 157 fuel assemblies with each fuel assembly containing 264 fuel rods clad with Zircaloy-4 or ZIRLO. Each fuel rod shall have a nominal active fuel length of 144 inches and contain a maximum total weight of 1780 grams uranium. The initial core loading shall have a maximum enrichment of 3.2 weight percent U-235. Reload fuel shall be similar in physical design to the initial core loading and shall have a maximum enrichment of 4.3 weight percent U-235.

#### CONTROL ROD ASSEMBLIES

5.3.2 The reactor core shall contain 48 full length control rod assemblies. The full length control rod assemblies shall contain a nominal 142 inches of absorber material. The nominal values of absorber material shall be 80 percent silver, 15 percent indium and 5 percent cadmium. All control rods shall be clad with stainless steel tubing.

### 5.4 REACTOR COOLANT SYSTEM

#### DESIGN PRESSURE AND TEMPERATURE

5.4.1 The reactor coolant system is designed and shall be maintained:

ADMINISTRATIVE CONTROLS (Cont'd)

---

- 2a. WCAP-9220-P-A, Rev. 1, "WESTINGHOUSE ECCS EVALUATION MODEL - 1981 VERSION", February 1982 (W Proprietary).  
(Methodology for LCO 3.2.2 - Heat Flux Hot Channel Factor).
- 2b. WCAP-9561-P-A, ADD. 3, Rev. 1, "BART A-1: A COMPUTER CODE FOR THE BEST ESTIMATE ANALYSIS OF REFLOOD TRANSIENTS - SPECIAL REPORT: THIMBLE MODELING IN W ECCS EVALUATION MODEL", JULY, 1986, (W Proprietary).  
(Methodology for LCO 3.2.2 - Heat Flux Hot Channel Factor).
- 2c. WCAP-10266-P-A, Rev. 2, "The 1981 Version of the Westinghouse ECCS Evaluation Model Using the BASH Code", March 1987 (W Proprietary).  
(Methodology for LCO 3.2.2 - Heat Flux Hot Channel Factor).
- 2d. WCAP-10054-P-A, "Westinghouse Small Break ECCS Evaluation Model Using the NOTRUMP Code," August 1985 (W Proprietary).  
(Methodology for LCO 3.2.2 - Heat Flux Hot Channel Factor).
- 2e. WCAP-10079-P-A, "NOTRUMP, A Nodal Transient Small Break and General Network Code", August 1985 (W Proprietary).  
(Methodology for LCO 3.2.2 - Heat Flux Hot Channel Factor).
- 2f. WCAP-12610, "VANTAGE+ FUEL ASSEMBLY REPORT," June 1990 (W Proprietary).  
(Methodology for LCO 3.2.2 - Heat Flux Hot Channel Factor.)
- 3a. VEP-NE-2-A, "Statistical DNBR Evaluation Methodology", June 1987.  
(Methodology for LCO 3.2.3, Nuclear Enthalpy Rise Hot Channel Factor).
- 3b. VEP-NE-3-A, "Qualification of the WRB-1 CHF Correlation in the Virginia Power COBRA Code", July 1990.  
(Methodology for LCO 3.2.3 Nuclear Enthalpy Rise Hot Channel Factor).
4. VEP-NE-1-A, "Vepco Relaxed Power Distribution Control Methodology and Associated FQ Surveillance Technical Specifications," March 1986.  
(Methodology for LCO 3.2.2 - Heat Flux Hot Channel Factor and LCO 3.2.1 - Axial Flux Difference.)



UNITED STATES  
NUCLEAR REGULATORY COMMISSION

WASHINGTON, D. C. 20555-0001

VIRGINIA ELECTRIC AND POWER COMPANY

OLD DOMINION ELECTRIC COOPERATIVE

DOCKET NO. 50-339

NORTH ANNA POWER STATION, UNIT NO. 2

AMENDMENT TO FACILITY OPERATING LICENSE

Amendment No. 164  
License No. NPF-7

1. The Nuclear Regulatory Commission (the Commission) has found that:
  - A. The application for amendment by Virginia Electric and Power Company et al., (the licensee) dated October 4, 1993, complies with the standards and requirements of the Atomic Energy Act of 1954, as amended (the Act), and the Commission's rules and regulations set forth in 10 CFR Chapter I;
  - B. The facility will operate in conformity with the application, the provisions of the Act, and the rules and regulations of the Commission;
  - C. There is reasonable assurance (i) that the activities authorized by this amendment can be conducted without endangering the health and safety of the public, and (ii) that such activities will be conducted in compliance with the Commission's regulations;
  - D. The issuance of this amendment will not be inimical to the common defense and security or to the health and safety of the public; and
  - E. The issuance of this amendment is in accordance with 10 CFR Part 51 of the Commission's regulations and all applicable requirements have been satisfied.




2. Accordingly, the license is amended by changes to the Technical Specifications as indicated in the attachment to this license amendment, and paragraph 2.C.(2) of Facility Operating License No. NPF-7 is hereby amended to read as follows:

(2) Technical Specifications

The Technical Specifications contained in Appendices A and B, as revised through Amendment No. 164, are hereby incorporated in the license. The licensee shall operate the facility in accordance with the Technical Specifications.

3. This license amendment is effective as of its date of issuance and shall be implemented within 30 days.

FOR THE NUCLEAR REGULATORY COMMISSION

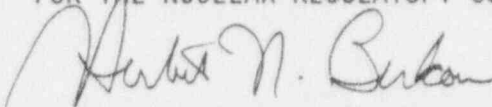

Herbert N. Berkow, Director  
Project Directorate 11-2  
Division of Reactor Projects - I/II  
Office of Nuclear Reactor Regulation

Attachment:  
Changes to the Technical  
Specifications

Date of Issuance: May 26, 1994

ATTACHMENT TO LICENSE AMENDMENT NO. 154

TO FACILITY OPERATING LICENSE NO. NPF-7

DOCKET NO. 50-339

Replace the following pages of the Appendix "A" Technical Specifications with the enclosed pages as indicated. The revised pages are identified by amendment number and contain vertical lines indicating the area of change. The corresponding overleaf page is also provided to maintain document completeness.

Remove Pages

5-4  
6-17a


Insert Pages

5-4  
6-17a



LEGEND

- Proposed
- Existing
- ▨ 1000' BUFFER
- ▭ 1000' BUFFER

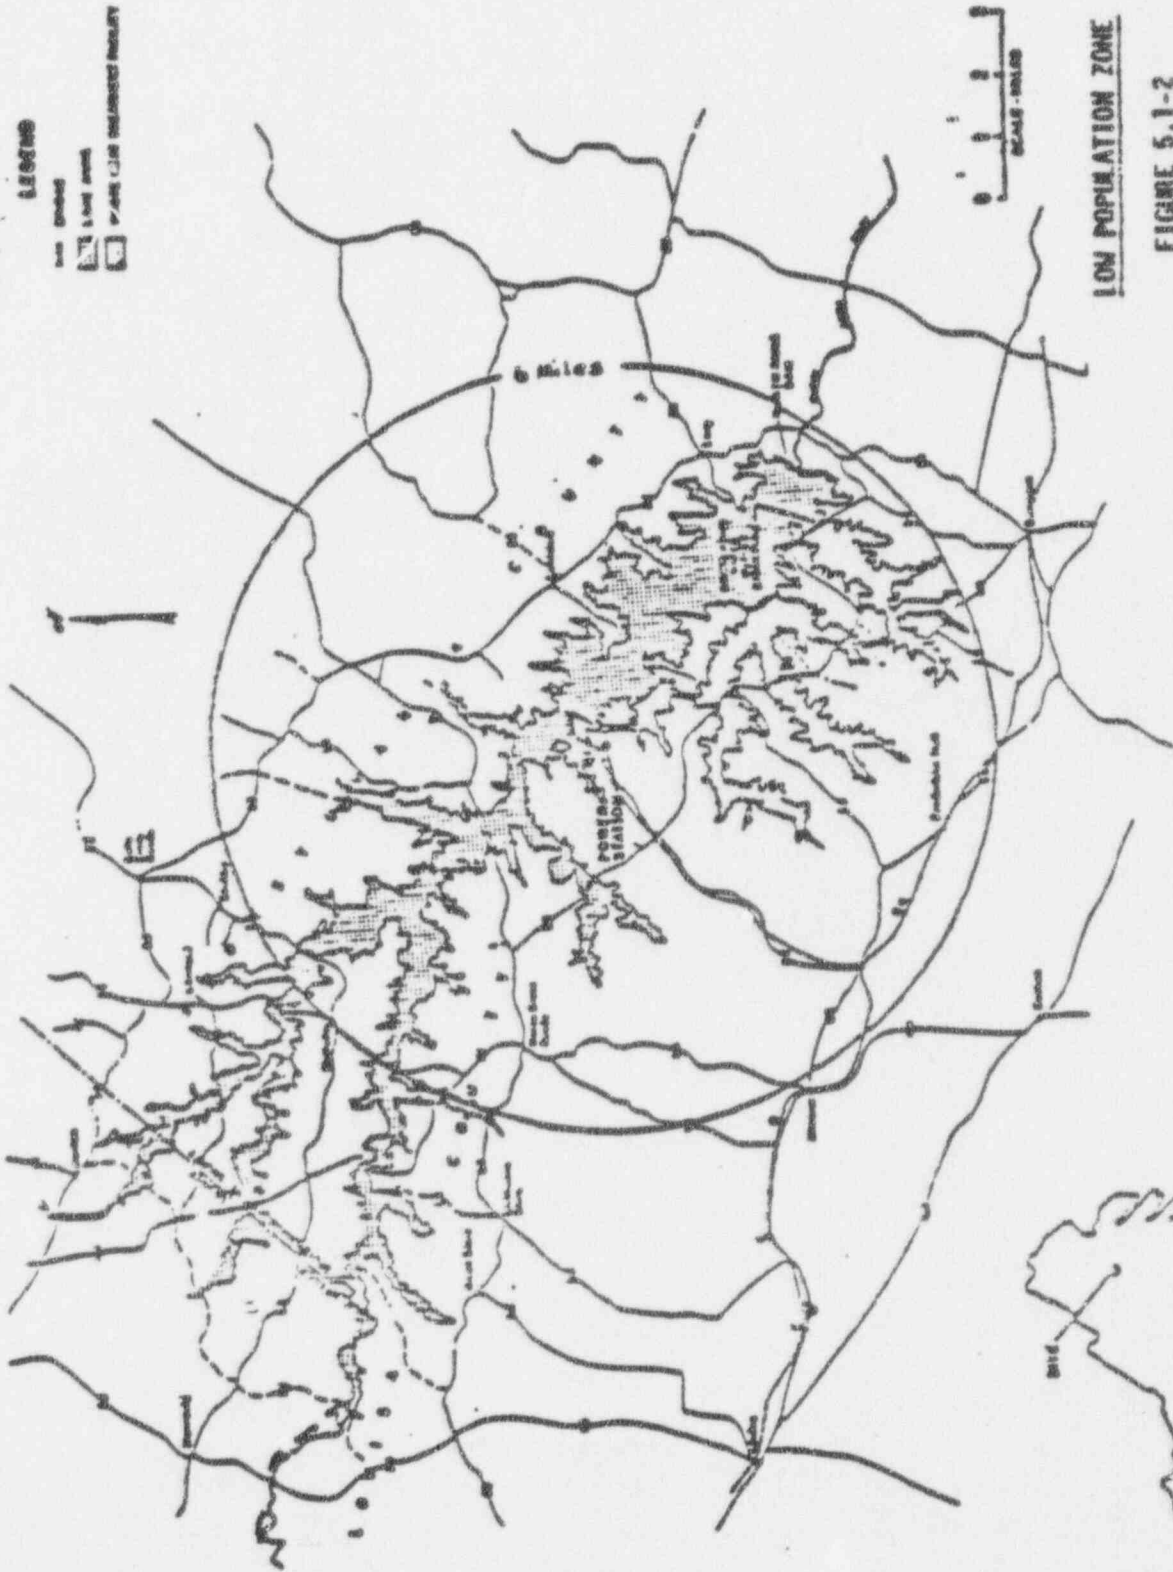

LOW POPULATION ZONE

FIGURE 5.1-2

## DESIGN FEATURES

### 5.3 REACTOR CORE

#### FUEL ASSEMBLIES

5.3.1 The reactor core shall contain 157 fuel assemblies with each fuel assembly containing 264 fuel rods clad with Zircaloy-4 or ZIRLO. Each fuel rod shall have a nominal active fuel length of 144 inches and contain a maximum total weight of 1780 grams uranium. The initial core loading shall have a maximum enrichment of 3.2 weight percent U-235. Reload fuel shall be similar in physical design to the initial core loading and shall have a maximum enrichment of 4.3 weight percent U-235.

#### CONTROL ROD ASSEMBLIES

5.3.2 The reactor core shall contain 48 full length control rod assemblies. The full length control rod assemblies shall contain a nominal 142 inches of absorber material. The nominal values of absorber material shall be 80 percent silver, 15 percent indium and 5 percent cadmium. All control rods shall be clad with stainless steel tubing.

### 5.4 REACTOR COOLANT SYSTEM

#### DESIGN PRESSURE AND TEMPERATURE

5.4.1 The reactor coolant system is designed and shall be maintained:

- a. In accordance with the code requirements specified in Section 5.2 of the FSAR, with allowance for normal degradation pursuant to the applicable Surveillance Requirements,
- b. For a pressure of 2485 psig, and
- c. For a temperature of 650°F, except for the pressurizer which is 680°F.

#### VOLUME

5.4.2 The total water and steam volume of the reactor coolant system is approximately 10,000 cubic feet at nominal operating conditions.

ADMINISTRATIVE CONTROLS (Cont'd)

- 2a. WCAP-9220-P-A, Rev. 1, "WESTINGHOUSE ECCS EVALUATION MODEL - 1981 VERSION", February 1982 (W Proprietary).  
(Methodology for LCO 3.2.2 - Heat Flux Hot Channel Factor).
- 2b. WCAP-9561-P-A, ADD. 3, Rev. 1, "BART A-1: A COMPUTER CODE FOR THE BEST ESTIMATE ANALYSIS OF REFLOOD TRANSIENTS - SPECIAL REPORT: THIMBLE MODELING IN W ECCS EVALUATION MODEL", JULY, 1986, (W Proprietary).  
(Methodology for LCO 3.2.2 - Heat Flux Hot Channel Factor).
- 2c. WCAP-10266-P-A, Rev. 2, "The 1981 Version of the Westinghouse ECCS Evaluation Model Using the BASH Code", March 1987 (W Proprietary).  
(Methodology for LCO 3.2.2 - Heat Flux Hot Channel Factor).
- 2d. WCAP-10054-P-A, "Westinghouse Small Break ECCS Evaluation Model Using the NOTRUMP Code," August 1985 (W Proprietary).  
(Methodology for LCO 3.2.2 - Heat Flux Hot Channel Factor).
- 2e. WCAP-10079-P-A, "NOTRUMP, A Nodal Transient Small Break and General Network Code", August 1985 (W Proprietary).  
(Methodology for LCO 3.2.2 - Heat Flux Hot Channel Factor).
- 2f. WCAP-12610, "VANTAGE+ FUEL ASSEMBLY REPORT," June 1990 (W Proprietary).  
(Methodology for LCO 3.2.2 - Heat Flux Hot Channel Factor.)
- 3a. VEP-NE-2-A, "Statistical DNBR Evaluation Methodology", June 1987.  
(Methodology for LCO 3.2.3, Nuclear Enthalpy Rise Hot Channel Factor).
- 3b. VEP-NE-3-A, "Qualification of the WRB-1 CHF Correlation in the Virginia Power COBRA Code", July 1990.  
(Methodology for LCO 3.2.3 Nuclear Enthalpy Rise Hot Channel Factor).
4. VEP-NE-1-A, "Vepco Relaxed Power Distribution Control Methodology and Associated FQ Surveillance Technical Specifications," March 1986.  
(Methodology for LCO 3.2.2 - Heat Flux Hot Channel Factor and LCO 3.2.1 - Axial Flux Difference.)