


**NSP****Regulatory Docket File****NORTHERN STATES POWER COMPANY**

MINNEAPOLIS, MINNESOTA 55401

November 10, 1975

Mr. D. L. Ziemann, Chief  
Operating Reactors Branch # 2  
Division of Reactor Licensing  
U. S. Nuclear Regulatory Commission  
Washington, DC 20555

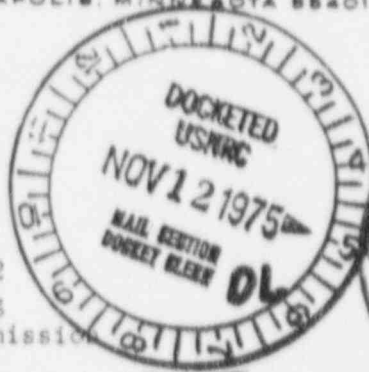

Dear Mr. Ziemann:

MONTICELLO NUCLEAR GENERATING PLANT  
Docket No. 50-263 License No. DPR-22

Response to August 21, 1975  
ATWS Letter

This letter is in response to your August 21, 1975 letter regarding an Anticipated Transient Without Scram (ATWS) event at the Monticello facility.

The USAEC Technical Report "Anticipated Transients Without Scram for Water Cooled Power Reactors," WASH-1270, September, 1973 identified Monticello as a Class C plant stating that the need for backfitting for this class of plant should be considered on an individual case basis. Your August 21, 1975 letter stated that design modifications should be implemented at Monticello to reduce the probability or consequences of an ATWS event. As a Class C plant, the analyses required for Monticello by WASH-1270 did not treat ATWS as a new design requirement and therefore did not involve investigation of acceptable alternatives.

As a result of your August 21, 1975 letter, we have had discussions with all licensees of C plants which are similar to Monticello. A joint utility program is being formulated to evaluate ATWS alternatives for those plants. We expect to present to you in the near future a program, along with a schedule, designed to be compatible with the conditions of the February 28, 1975 Staff testimony on ATWS which states "...the probability of occurrence of an ATWS event with serious consequences is low enough to satisfy our safety objective today and for the next few years." (Docket No. 50-263, Supplemental Testimony of Nuclear Regulatory Commission Staff on Contention 11-33, page 93.) We are prepared to work with you to resolve the appropriate backfit considerations on a schedule compatible with the safety objective stated in WASH-1270.

Your letter also requested additional information regarding the response of the Monticello plant to an ATWS event. Enclosure 1 to this letter provides

9105140464 751110  
PDR ADDCK 05000263  
P PDR

**12971**

NORTHERN STATES POWER COMPANY

D. L. Ziemann


2

November 10, 1975

some of the additional information requested. Answers to other portions of your request should logically follow further ATWS analysis. The results of that study may show that certain of the requested information may be irrelevant or may need to be modified. Therefore, we will delay our response, where appropriate, until further evaluation of ATWS for C plants has developed the appropriate information.

A number of minor errors existed in our April 1, 1975 ATWS submittal which were identified to our NRC Project Manager in April and May. In order to establish a complete and correct record, we are including Enclosure 2 which provides corrected pages and instructions for inserting the new pages.

Yours very truly,



L. O. Mayer, PE  
Manager, Nuclear Support Services

LOM/MHV/deb

cc: J. G. Keppler  
G. Charnoff  
MPCA  
J. W. Ferman

Enclosures

Enclosure 111-10-75

The following information repeats the requests for additional information from the August 21, 1975 letter from D. L. Ziemann (USNRC) to L. O. Mayer (NSP) and provides the respective responses.

Request Number 1

Provide the peak torus water temperature reached during the MSIV closure ATWS. Provide and justify a torus water temperature limit. If the calculated temperature exceeds the limit, discuss the plant modifications needed to keep torus water temperature below the proposed limit. If the peak torus water temperature exceeds 170°F discuss plant modifications needed to keep this temperature below 170°F.

Response Number 1

Torus water temperature was calculated and is reported in responses 4, 5 and 6 below. As stated in NEDO-20846, the justification of a torus temperature limit is part of a General Electric program currently underway.

Request Number 2

The analysis, as described in the Monticello ATWS report, takes credit for the operator initiating the standby liquid control (SLC) system five minutes after the ATWS event. Discuss the indications available to the operator to assure this manual initiation of the SLC.

Response Number 2

There are 5 aspects to be considered in answering this question. They will be considered individually in the order of increasing indication to the reactor operator.

- A. ATWS event not involving reactor isolation.
- B. ATWS event involving reactor isolation.
- C. Scram is challenged; total lack of response.
- D. Scram is challenged; partial response but no control rod movement.
- E. Operator reaction to scram.

A. ATWS Events Not Involving Reactor Isolation - For purposes of responding to this question, ATWS events have been categorized into two groups. The events having the least impact on the plant are those not involving reactor isolation. If such an event occurred, the operator would observe the effects of such an event through changes in process variables which he continuously monitors in the control room (reactor power, pressure, system temperatures, radiation levels, etc.) He would also observe any change of state such as the automatic initiation of equipment. Significant deviations from steady state conditions are alarmed by the lighted and audible control room annunciator system which must be acknowledged by the operator to silence the alarm. The plant process computer monitors many of

the same parameters. When an alarm signal is received by the process computer, an audible alarm alerts the reactor operator and a hard copy of the alarm message is logged by the alarm typer.

There is widespread diversity among all of the functions, components and systems which provide the indications of an ATWS event and scram initiation.

B. ATWS Events Involving Reactor Isolation - The worst of ATWS isolation events is an MSIV closure as analyzed in report NEDO-20846 wherein it was assumed that the operator would respond by initiating the SLC system in 5 minutes. In addition to the general indications discussed above, the isolation events are characterized by the following indications:

- 1) Reactor pressure will increase rapidly with indications on a strip chart recorder before the reactor operator. Numerous alarms will light and sound almost instantaneously.
- 2) The neutron flux will spike upscale on the strip chart recorders before the reactor operator.
- 3) The relief valves will open which can be heard by operating personnel within the plant.
- 4) The torus pool temperature will be observed to increase.

Each of these parameters will be alarmed visually and audibly to the control room operator. This combination of events will immediately tell the operator that a scram should have accompanied this event and he will proceed with the procedure for a scram discussed below.

C. Scram is Challenged; Total Lack of Response - This situation can occur only in the unlikely event that a common mode failure affects a specific segment of the scram system. If the CMF affects sensors of a given function, the scram will be initiated by other process variables momentarily. For example, if an MSIV closure occurred along with sufficient failures of the position switches to prevent a scram, the reactor pressure sensors and the high neutron flux sensors would initiate a scram. It is difficult to postulate a CMF which would deprive the operator of the specific information that the scram system was challenged. Assuming, for the moment, that there is a total lack of information that the scram system was challenged, the reactor operator would still have the indications discussed in paragraphs A and B which would show the need to initiate the SLCS.

D. Scram Challenged; Partial Response but no Control Rod Movement - If the assumed common mode failure affected intermediate components between the sensors and the components implementing the scram, the more likely of the very unlikely hypothesized ATWS event, one might expect to have additional information available identifying the challenge of the scram system but with failure of rods to move. The scram will be annunciated directly to the operator and the plant process computer typers will begin printing a sequence of events log and a plant disturbance log. Immediately the operator's reaction will be to respond according to the scram procedure discussed below.

Enclosure 1 Page 3

E. Operator Reaction to Scram - The first four steps of the procedure that an operator follows after a scram are as follows:

- 1) Announce over the plant talking system that a scram has occurred.
- 2) Place the reactor mode switch in the Shutdown position
- 3) Verify that all rods have been inserted by observing the digital position indication of each control rod displayed on the operator console.
- 4) Insert SRM and IRM detectors.

(Of these immediate steps it should be noted that by placing the reactor mode switch in the Shutdown position an automatic interlock acts to again initiate a scram. Also, when the SRM and IRM detectors are inserted and sense a high count rate within the core, they will initiate a scram.) After receiving all the indications discussed above, the operator will know that a scram should have occurred, and in accordance with step 3 of the scram procedure he will verify that the control rods have inserted properly. If he observes that none of the control rods have inserted, he will immediately initiate a manual scram. Because of the design of the scram system there is a possibility that should sufficient equipment fail to prevent the automatic scram, the manual scram will still function. In the unlikely event that the manual scram does not result in control rod movement, the operator would realize that SLC must be initiated to shut down the reactor. In the case of a failure to scram following an isolation event, sufficient information would be available to him within a few seconds upon which he would base his decision to initiate the SLC system.

The SLC system is initiated by actuating a single keylocked switch in the control room. No further operator action is required. The key to initiate this system is under the control of the shift supervisor. The shift supervisor reports to the control room immediately upon the announcement of a scram. It is extremely unlikely that he will be more than a minutes distance from the control room. The largest fraction of a shift supervisors time is spent in the control room or in an office adjoining the control room. It is therefore proper to assume that should an isolation event occur with a failure to scram, the operator would be made aware of the situation and have the capability to initiate the SLC system to correct the situation within five minutes.

Request Number 3

In figure 4-3 the relief valve flow oscillates between about 3,000 and 7,000 lb/sec from about 30 seconds to 95 seconds after the ATWS. At about 108 seconds the relief valve flow begins to oscillate between 3,000 and 14,000 lb/sec. Explain this difference in the peak relief valve flow.

Response Number 3

Please note that the ordinate of Figure 4-3 has been corrected to read "Flow Rate (lb/sec x  $10^3$ )" rather than "Flow Rate (lb/sec x  $10^4$ )."

Figure 4-3 shows the ATWS analysis assuming three plant modifications initiated upon high reactor pressure, recirculation pump trip, feedwater pump trip and ADS inhibit.

Upon MSIV closure, reactor pressure rises causing the recirculation and feedwater pumps to trip at 4 seconds. The former causes reduction in the flow through the core. Stoppage of feedwater causes the reactor water level to gradually drop (thereby further decreasing the core flow) and also reduces the sub-cooling of the core inlet flow. Both core flow decrease and core inlet sub-cooling decrease result in increased core average voids and therefore decreased core power. Therefore, after the initial pressure and power spikes subside (i.e., after about 30 seconds) the reactor power attains a level of approximately 30% of the initial value. With MSIV's closed, this power is relieved from the reactor pressure vessel by steam flow through the relief valves which are assumed to operate in four groups. At this power level only two relief valve groups are sufficient to relieve all the energy generation. The opening and closing characteristics of the relief valves cause the relief flow to oscillate between approximately 350 lb/sec and 700 lb/sec (which indicates that the first group of relief valves is open and the second group is cycling).

The reactor level continues to drop due to continued power generation and lack of feedwater flow. When it reaches the low low level, the HPCI system is initiated. The HPCI flow starts at about 85 seconds and brings water of enthalpy 90 BTU/lbm into the reactor. This relatively cold water increases the core inlet sub-cooling resulting in slightly decreased core voids and increased core power. To relieve the increased power more relief valves are called upon to act. This combined with the dynamic characteristics of the relief valves causes the relief flow to oscillate between 350 lb/sec and 1,400 lb/sec after about 100 seconds (indicating that the first group of valves is open and the next three groups are cycling).

Requests Number 4, 5 and 6

The Technical Specifications present sodium pentaborate solution concentration versus net tank volume in Figure 3.4.1. The concentration varies from 10.8% to 21.4%. Perform the analysis using each of these concentrations. Justify the use of 13% as an initial condition listed in Table 3-1 of NEDO-20846. Also justify the poison reactivity worth and specify the reactor vessel volume.

In Section 4.4 of the Technical Specifications a minimum flow rate of 24 gpm for each of the standby liquid control system pumps is listed as a surveillance requirement. Perform the analysis using this value. In Table 3-2 of NEDO-20846 a 28 gpm flow rate per pump is listed. Provide your basis for using this value in your analysis. Specify the total volume of poison injected following the ATWS and indicate the required volume for both hot shutdown and cold shutdown.

It is stated that no accounting for possible non-homogeneous mixing was made since this would take a detailed evaluation. However, GE stated at a meeting with the staff on August 7, 1974, that tests were being conducted on borated water mixing phenomena. Demonstrate that your assumption of uniform mixing is consistent with the experimental data. Otherwise, perform a sensitivity study to show the effects of non-homogeneous mixing of the liquid poison, varying the mixing efficiency from 50% to 100%.



Responses Number 4, 5 and 6

A base case calculation for Monticello was provided in NEDO-20846; the inputs and assumptions are listed in that document. Sensitivity studies of those parameters identified in requests number 4, 5 and 6 are summarized in Table 1, below. An estimation of the effect of a lesser reactivity insertion rate on torus temperature and pressure is provided in Table 2 based on calculational results of the base case. This information, along with miscellaneous requested data presented in Table 3, can be used to assess the physical effects of parameters in question.

Please note that vessel pressure peak, fuel enthalpy peak and cladding oxidation are not affected by change in SLC reactivity insertion rate.

Additional information on this topic may be deemed appropriate for the generic study of ATWS for C plants.

Analytical studies treating the primary aspects of the mixing of the sodium pentaborate solution in the reactor vessel are underway at the present time. These studies are, at present, expected to be completed by the end of the first quarter of 1976.

TABLE 1

Reactivity Insertion Rates Corresponding to Conditions  
Other Than Those Used in the Base Case

<u>Case</u>	<u>Condition as Different From Base Case</u>	<u>Corresponding Reactivity Insertion Rate (-c/Sec)</u>	
		<u>With 1 SLC Pump</u>	<u>With 2 SLC Pumps</u>
1	None - (Base Case)	1.19	2.38
2	Sodium Pentaborate Concentration = 10.8%	0.9886	1.9772
3	Sodium Pentaborate Concentration = 21.4%	1.9585	3.9178
4	SLC Flow Rate = 24 gpm/pump	1.02	2.04
5	Mixing Efficiency = 50%	0.595	1.19
6	Mixing Efficiency = 75%	0.8925	1.7850

TABLE 2

Effect of SLC Reactivity Insertion Rate on the  
Peak Containment Pressure and Temperature  
(SLC Initiation Time = 5 Min.)

<u>Reactivity Insertion Rate -c/Sec.</u>	<u>Containment Peak Temperature °F</u>	<u>Containment Peak Pressure (psig)</u>
2.38	184	5.1
1.19	213.9	6.9
0.595	274	48.6

TABLE 3

Miscellaneous Data Requested

Reactor vessel volume to normal water level.....	9,130 ft <sup>3</sup>
Reactivity required to bring reactor from 100% power to hot shutdown.....	1.7%
Reactivity required to bring reactor from hot shutdown to cold shutdown.....	1.5%

Request Number 7

The staff has submitted to General Electric questions on NEDO-20626 (letter from V. Stello to I. Stuart, January 28, 1974, and letter from W. Butler to I. Stuart, April 9, 1975, copies are enclosed). Respond to the following questions as they apply to Monticello: 1, 4, 5, 6, 9, 12, 13, 16, 17, 310.1, 310.3, and 310.5.

Response Number 7

The requests for information referenced above were asked as part of the staff review of a generic study of Class B BWR plants. Each request will be reviewed in the appropriate perspective as part of the anticipated Class C generic program and addressed accordingly.

Request Number 8

Provide the bases for assuming thirty seconds for transport time of the sodium pentaborate solution from the storage tank to the vessel and for the liquid to become effective in the core.

Response Number 8

The thirty second transport time is made up of two segments. Approximately half of the time is required to pump the boron solution at rated flow to the sparger immediately below the core. The remaining 15 seconds is an estimate of the time it takes for the solution to mix with reactor water and become effective in reducing the reactivity of the core. Study of boron mixing discussed in the response to requests number 4, 5 and 6 will provide a better basis for transport time.



## Enclosure 2

This enclosure transmits corrections to the report submitted by L. O. Mayer (NSP) to A. Giambusso (USNRC) on April 1, 1975 entitled "Anticipated Transients Without Scram: Study for the Monticello Generating Plant, NEDO-20846, March 1975." The changes include the following:

1. Either destroy the hard cover (which contains the same information as page 1) or change the date from "March 1975" to "Revision 1, May 1975."
2. Destroy the pages of the original report listed below. Replace each page with the respective replacement page dated "May 1975" which is attached.

## Superceded Pages

1  
4  
7  
9  
11  
12  
14  
16  
18

**NRC DISTRIBUTION FOR PART 50 DOCKET MATERIAL  
(TEMPORARY FORM)**

CONTROL NO: 12971

FILE: \_\_\_\_\_

FROM: NSP Minneapolis, Minn. 55401 L.O. Mayer			DATE OF DOC 11-10-75	DATE REC'D 11-12-75	LTR XX	TWX	RPT	OTHER
TO: Mr. D.L. Ziemann			ORIG	CC 40	OTHER	SENT NRC PDR XX SENT LOCAL PDR XX		
CLASS	UNCLASS XXX	PROP INFO	INPUT	NO CYS REC'D 40		DOCKET NO: 50-263		

DESCRIPTION: Ltr re our 8-21-75 ltr...trans following: ENCLOSURES: Enc 1 "Addl info re our 8-21-75 ltr re ATWS...."

Enc 2 "Corrections to the report entitled ATWS Study for the Monticello Plant" (NEDO-20846 Class 1 rev. 1, May 1975...."

(40 cys ea encl rec'd)

PLANT NAME: Monticello Plant

*Do not remove*

*ACKNOWLEDGED*

**FOR ACTION/INFORMATION** DHL 11-13-75

BUTLER (L) W/ Copies	SCHWENCER (L) W/ Copies	ZIEMANN (L) W/ Copies	REGAN (E) W/ Copies	REID (L) W/ COPIES
CLARK (L) W/ Copies	STOLZ (L) W/ Copies	DICKER (E) W/ Copies	LEAR (L) W/ Copies	
PARR (L) W/ Copies	VASSALLO (L) W/ Copies	KNIGHTON (E) W/ Copies	SPIES W/ Copies	
KNIEL (L) W/ Copies	PURPLE (L) W/ Copies	YOUNGBLOOD (E) W/ Copies	LPM <b>BUCKLEY</b> W/ Copies	

**INTERNAL DISTRIBUTION**

<b>REG FILE</b> NRC PDR OGC, ROOM P-506A GOSSICK/STAFF CASE GIAMBUSO BOYD MOORE (L) DEYOUNG (L) SKOVHOLT (L) GOLLER (L) (Ltr) P. COLLINS DENISE REG OPR FILE & REGION (2) MIPC	<b>TECH REVIEW</b> SCHROEDER MACCARY KNIGHT PAWLICKI SHAO STELLO HOUSTON NOVAK BOSS APPOLITO TEDESCO J. COLLINS LAINAS BENAROYA VOLLMER <b>MINNERS</b>	<b>DENTON</b> GRIMES GAMMILL KASTNER BALLARD SPANGLER  <b>ENVIRO</b> MULLER DICKER KNIGHTON YOUNGBLOOD REGAN PROJECT LDR <b>HARLESS</b>	<b>LIC ASST</b> R. DIGGS (L) <b>+ ALL CIS</b> H. GEARIN (L) E. GOULBOURNE (L) P. KREUTZER (E) J. LEE (L) M. RUIJBROOK (L) S. REED (E) M. SERVICE (L) S. SHEPPARD (L) M. SLATER (E) H. SMITH (L) S. TEETS (L) G. WILLIAMS (E) V. WILSON (L) R. INGRAM (L) M. DUNCAN (E)	<b>AVT IND.</b> BRAITMAN SALTZMAN MELTZ  <b>PLANS</b> MCDONALD CHAPMAN DUBE (Ltr) E. COUPE PETERSON HARTFIELD (2) GLECKER EISENHUT WIGGINTON <b>THADANI</b> <b>JENSEN</b>
---	--	---	--	---

**EXTERNAL DISTRIBUTION**

1 - LOCAL PDR Minneapolis, Minn.	1 - TIC (ABERNATHY) (1)(2)(10)	1 - NATIONAL LABS	1 - PDR SAN/LA/NY
1 - NSIC (BUCHANAN)	1 - W. PENNINGTON, Rm E-201 GT	1 - CONSULTANTS	1 - BROOKHAVEN NAT LAB
1 - ASLB	1 - NEWMARK/BLUME/AGBABIAN		1 - G. ULRIKSON ORNL
1 - Newton Anderson			

**16** ACRS ~~sent~~ / SENT TO L.A.

*MA-2*