



UNITED STATES
NUCLEAR REGULATORY COMMISSION
WASHINGTON, D. C. 20555

GPU NUCLEAR CORPORATION
AND
JERSEY CENTRAL POWER & LIGHT COMPANY
OYSTER CREEK NUCLEAR GENERATING STATION
AMENDMENT TO PROVISIONAL OPERATING LICENSE

Amendment No. 73
License No. DPR-16

1. The Nuclear Regulatory Commission (the Commission) has found that:
 - A. The application for amendment by GPU Nuclear Corporation and Jersey Central Power and Light Company (the licensees) dated December 21, 1983, which supersedes application dated July 13, 1983, as supplemented by letter dated May 15, 1984 and clarified by letter dated March 13, 1984, complies with the standards and requirements of the Atomic Energy Act of 1954, as amended (the Act), and the Commission's rules and regulations set forth in 10 CFR Chapter I;
 - B. The facility will operate in conformity with the application, the provisions of the Act, and the rules and regulations of the Commission;
 - C. There is reasonable assurance (i) that the activities authorized by this amendment can be conducted without endangering the health and safety of the public, and (ii) that such activities will be conducted in compliance with the Commission's regulations;
 - D. The issuance of this amendment will not be inimical to the common defense and security or to the health and safety of the public; and
 - E. The issuance of this amendment is in accordance with 10 CFR Part 51 of the Commission's regulations and all applicable requirements have been satisfied.

8406260413 840620
PDR ADOCK 05000219
P PDR

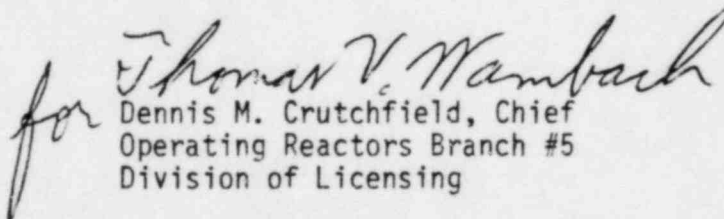
2. Accordingly, the license is amended by changes to the Technical Specifications as indicated in the attachment to this license amendment and Paragraph 2.C(2) of Provisional Operating License No. DPR-16 is hereby amended to read as follows:

(2) Technical Specifications

The Technical Specifications contained in Appendices A and B, as revised through Amendment No. 73, are hereby incorporated in the license. GPU Nuclear Corporation shall operate the facility in accordance with the Technical Specifications.

3. This license amendment is effective as of the date of its issuance. However, the Technical Specification changes approved by this amendment are to be implemented upon completion of the modification prior to restart from the current cycle 10 refueling outage.

FOR THE NUCLEAR REGULATORY COMMISSION

for 
Dennis M. Crutchfield, Chief
Operating Reactors Branch #5
Division of Licensing

Attachment:
Changes to the Technical
Specifications

Date of Issuance: June 20, 1984

ATTACHMENT TO LICENSE AMENDMENT NO. 73
PROVISIONAL OPERATING LICENSE NO. DPR-16
DOCKET NO. 50-219

Replace the following pages of the Appendix A Technical Specifications with the enclosed pages. The revised pages are identified by the captioned amendment number and contain vertical lines indicating the area of change.

PAGES

3.1-4

3.1-7

3.1-7a

3.1-11

3.1-11a

4.2-1a

isolation, initiate automatic depressurization in conjunction with low-low-low-reactor water level, initiate the standby gas treatment system and isolate the reactor building. The scram function shuts the core down during the loss-of-coolant accidents. A steam leak of about 15 gpm and a liquid leak of about 35 gpm from the primary system will cause drywell pressure to reach the scram point; and therefore the scram provides protection for breaks greater than the above.

High drywell pressure provides a second means of initiating the core spray to mitigate the consequences of a loss-of-coolant accident. Its set point of 2 psig initiates the core spray in time to provide adequate core cooling. The break-size coverage of high drywell pressure was discussed above. Low-low water level and high drywell pressure in addition to initiating core spray also causes isolation valve closure. These settings are adequate to cause isolation to minimize the offsite dose within required limits.

It is permissible to make the drywell pressure instrument channels inoperable during performance of the integrated primary containment leakage rate test provided the reactor is in the cold shutdown condition. The reason for this is that the Engineered Safety Features, which are effective in case of a LOCA under these conditions, will still be effective because they will be activated by low-low reactor water level.

The scram discharge volume has two separate instrument volumes utilized to detect water accumulation. The high water level is based on the design that the water in the SDIV's, as detected by either set of level instruments, shall not be allowed to exceed 29.0 gallons; thereby, permitting 137 control rods to scram. To provide further margin, an accumulation of not more than 14.0 gallons of water, as detected by either instrument volume, will result in a rod block and an alarm. The accumulation of not more than 7.0 gallons of water, as detected in either instrument volume will result in an alarm.

Detailed analyses of transients have shown that sufficient protection is provided by other scrams below 45% power to permit bypassing of the turbine trip and generator load rejection scrams. However, for operational convenience, 40% of rated power has been chosen as the setpoint below which these trips are bypassed. This setpoint is coincident with bypass valve capacity.

A low condenser vacuum scram trip of 23" Hg has been provided to protect the main condenser in the event that vacuum is lost. A loss of condenser vacuum would cause the turbine stop valves to close, resulting in a turbine trip transient. The low condenser vacuum trip anticipates this transient and scrams the reactor. The condenser is capable of receiving bypass steam until 7" Hg vacuum thereby mitigating the transient and providing a margin.

TABLE 3.1.1 PROTECTIVE INSTRUMENTATION REQUIREMENTS

Function	Trip Setting	Reactor Modes in which Function Must Be Operable				Min. No. of Operable or Operating [tripped] Trip systems	Min. No. of Instrument Channels Per Operable Trip Systems	Action Required*
		Shutdown	Refuel	Startup	Run			
A. Scram								Insert control rods
1. Manual Scram		X	X	X	X	2	1	
2. High Reactor Pressure	**		X(s)	X	X	2	2	
3. High Drywell Pressure	≤ 2 psig		X(u)	X(u)	X	2	2	
4. Low Reactor Water Level	**		X	X	X	2	2	
5. a. High Water Level in Scram Discharge Volume North Side	≤ 29 gal.		X(a)	X(z)	X(z)	2	2	
b. High Water Level in Scram Discharge Volume South Side	≤ 29 gal.		X(a)	X(z)	X(z)	2	2	
6. Low Condenser Vacuum	≥ 23 " hg.		X(b)	X(b)	X	2	2	

Function	Trip Setting	Reactor Modes in which Function Must Be Operable				Min. No. of Operable or Operating [tripped] Trip systems	Min. No. of Instrument Channels Per Operable Trip Systems	Action Required*
		Shutdown	Refuel	Startup	Run			
7. High Radiation in Main Steam Line Tunnel	< 10 x normal Background		X(s)	X	X	2	2	Insert control rods
8. Average Power Range Monitor (APRM)	**		X(c,s)	X(c)	X(c)	2	3	
9. Intermediate Range Monitor (IRM)	**		X(d)	X(d)		2	3	
10. Main Steamline Isolation Valve Closure	**		X(b,s)	X(b)	X	2	4	
11. Turbine Trip Scram	**				X(j)	2	4	
12. Generator Load Rejection Scram	**				X(j)	2	2	

Function	Trip Setting	Reactor Modes in which Function Must Be Operable				Min. No. of Operable or Operating [tripped] Trip systems	Min. No. of Instrument Channels Per Operable Trip Systems	Action Required*
		Shutdown	Refuel	Startup	Run			
K. Rod Block								
1. SRM Upscale	$\leq 5 \times 10^5$ cps		X	X(1)		1	3(y)	No control rod with- drawals per- mitted
2. SRM Downscale	≥ 100 cps(f)		X	X(1)		1	3(y)	
3. IRM Downscale	$\geq 5/125$ fullscale(g)		X	X		2	3	
4. APRM Upscale	**		X(s)	X	X	2	3(c)	
5. APRM Downscale	$\geq 2/150$ fullscale				X	2	3(c)	
6. IRM Upscale	$\leq 108/125$ fullscale		X	X		2	3	
7. a) water level high scram discharge volume North	≤ 14 gallons		X(z)	X(z)	X(z)	1	1 per instrum. volume	
b) water level high scram discharge volume South	≤ 14 gallons		X(z)	X(z)	X(z)	1	1 per instrum. volume.	
L. Condenser Vacuum Pump Isolation								
1. High Radia- ation in Main Steam Tunnel	$\leq 10 \times$ Normal background			During Startup and Run when vacuum pump 1 operating		2	2	Insert Control Rods

Function	Trip Setting	Reactor Modes in which Function Must Be Operable				Min. No. of Operable or Operating [tripped] Trip systems	Min. No. of Instrument Channels Per Operable Trip Systems	Action Required*
		Shutdown	Refuel	Startup	Run			
H. Diesel Generator <u>Load Sequence Timers</u>	Time delay after energiz- ation of relay							Consider con- tainment spray loop inoperable and comply with Spec. 3.4.C (See note q.).
1. Containment Spray Pump	40 sec \pm 15%	X	X	X	X	2(m)	1(n)	
2. CRD pump	60 sec \pm 15%	X	X	X	X	2(m)	1(n)	Consider the pump inoper- able and comply with Spec. 3.4.D (See Note q)
3. Emerg. Service Water Pump (r)	45 sec. \pm 15%	X	X	X	X	2(m)	1(n)	Consider the loop inoper- able and comply with Spec. 3.4.C
4. Service Water Pump (aa)	120 sec. \pm 15% 10 sec. \pm 15%	(SK1A) X (SK2A) (SK7A) (SK8A)	X	X	X	2(o)	(See Note q) 2(p)	Consider the pump inoper- able and comply within 7 days (See Note q)
5. Closed Cooling Water Pump (bb)	166 Sec. \pm 15%	X	X	X	X	2(m)	1(n)	Consider the pump inoper- able and comply within 7 days (See Note q)

- F. At specific power operation conditions, the actual control rod configuration will be compared with the expected configuration based upon appropriately corrected past data. This comparison shall be made every equivalent full power month. The initial rod inventory measurement performed when equilibrium conditions are established after a refueling or major core alteration will be used as base data for reactivity monitoring during subsequent power operation throughout the fuel cycle.
- G. At power operating conditions, the actual control rod density will be compared with the 3.5 percent control rod density included in Specification 3.2.B.6. This comparison shall be made every equivalent full power month.
- H. The scram discharge volume drain and vent valves shall be verified open at least once per 31 days, except in shutdown mode*, and shall be cycled at least one complete cycle of full travel at least quarterly.
- I. All withdrawn control rods shall be determined OPERABLE by demonstrating the scram discharge volume drain and vent valves OPERABLE. This will be done at least once per refueling cycle by placing the mode switch in shutdown and by verifying that:
 - a. The drain and vent valves close within 30 seconds after receipt of a signal for control rods to scram, and
 - b. The scram signal can be reset and the drain and vent valves open when the scram discharge volume trip is bypassed.

Basis:

The core reactivity limitation (Specification 3.2.A) requires that core reactivity be limited such that the core could be made subcritical at any time during the operating cycle, with the strongest operable control rod fully withdrawn and all other operable rods fully inserted. Compliance with this requirement can be demonstrated conveniently only at the time of refueling. Therefore, the demonstration must be such that it will apply to the entire subsequent fuel cycle. The demonstration is performed with the reactor in the cold, xenon-free condition and will show that the reactor is sub-critical at that time by at least $R + 0.25\% \Delta k$ with the highest worth operable control rod fully withdrawn.

* These valves may be closed intermittently for testing under administrative control.