DEPARTMENT OF ENERGY ALBUQUERQUE OPERATIONS OFFICE CONTRACT NO. DE-AC04-83AL18796

Draft Radiological and Engineering Assessment

Vicinity Property No. DUR 031

Remedial Actions
Contractor
for the
Uranium Mill Tailings
Remedial Actions
Project



8507090287 850404 PDR WASTE WM-48 PDR

DRAFT

THE RADIOLOGICAL AND ENGINEERING ASSESSMENT

AND FINAL DESIGN

FOR

DURANGO PROPERTY

DU-031

April 1, 1985

PREPARED FOR

URANIUM MILL TAILINGS REMEDIAL ACTION PROJECT OFFICE
UNITED STATES DEPARTMENT OF ENERGY

PREPARED BY

MORRISON-KNUDSEN COMPANY, INC.

TABLE OF CONTENTS

1.0 Executive Summary

- 1.1 Introduction
- 1.2 Evaluation and Recommendation

2.0 Engineering Field Survey

- 2.1 Property Description
- 2.2 Existing Facilities and Structures

3.0 Radiological Survey and Assessment

- 3.1 Gamma Exposure Rate Survey
- 3.2 Borehole Survey
- 3.3 Radon/Radon Daughter Survey
- 3.4 Estimated Extent of Contamination

4.0 Engineering Assessment

- 4.1 Evaluation of Options
- 4.2 Recommendation

5.0 Technical Specifications

6.0 Construction Drawing

DU-031-020 Excavation & Restoration Plan DU-031 DU-031-021 Demolition & Restoration Plan DU-031 DU-031-022 Demolition & Restoration Plan DU-031

DU-032-023 Building Section & Elevation DU-031

FIGURES

- 2.1 Vicinity Map DU-031
- 2.2 Site Plan DU-031
- 2.3 Property Photos
- 2.4 Property Photos
- 2.5 Property Photos
- 2.6 Property Photos
- 3.1 Radiological Survey Data DU-031
- 4.1 Excavation & Restoration Plan DU-031
- 4.2 Demolition & Restoration Plan DU-031
- 4.3 Demolition & Restoration Plan DU-031
- 4.4 Building Section & Elevation DU-031

Radiological and Engineering Assessment: Property DU-031

TABLES

- 2.1 Property Survey Data
- 3.1 Outdoor Surface Gamma Survey
- 3.2 Indoor Surface Gamma Survey
- 3.3 Outdoor Borehole Survey
- 3.4 Indoor Borehole Survey
- 4.1 Costs
- 5.1 Index of Technical Specifications

APPENDIX

A. Survey Data Logs

1.0 EXECUTIVE SUMMARY

1.1 Introduction

Property DU-031 is a private residence located at 128 Riverview Drive, Durango, CO.

1.2 Evaluation and Recommendation

1.2.1 Residual Radioactive Material Involvement

There three areas of contamination identified on this property.

1.2.2 Recommended Remedial Action Option

The recommended option is to remove the contaminated material.

1.2.3 Estimated Costs

The estimated cost for removal of the contaminated material and restoration of the property is \$57,000.00.

1.2.4 Schedule

The estimated duration of the remedial action effort is 40 to 45 days.

2.0 ENGINEERING FIELD SURVEY

2.1 Property Description

2.1.1 Property Use and Occupancy

Property DU-031 is a private residence located at 128 Riverview Drive, Durango, Colorado and owned by Richard and Mary Thomas. The map in Figure 2.1 illustrates the property's vicinity location.

2.1.2 Legal Description

The legal description as recorded with the La Plata County Recorder's Office on Microfilm No. 436703 follows:

Lot Twenty Five (25), Block Three (3), RIVERVIEW HEAGHTS RESUBDIVISION, according to the recorded plat thereof, County of La Plata, State of Colorado.

2.1.3 Bordering Properties

The lot is zoned R-1 Residential. It is located less than 2-1/2 miles northeast of the old Vanadium Corporation of America mill tailings site. The property is bounded on the north by a residence; on the east by a vacant lot; on the south by a residence; and on the west by Riverview Drive.

2.2 Existing Facilities and Structures

2.2.1 Structures

The residence is a single story wood frame structure with board and batting siding on a finished walkout basement. On the south side of the house there is an attached single car carport and uncovered concrete parking/storage area. The two car concrete driveway extends from the street to the carport and parking slab. Concrete sidewalks extend along the street outside the west lot line and along the east side of the walkout basement. A curved concrete ramp connects the southeast corner of the parking/storage space to the walk below. A set of wooden steps extends down to the walk from the rear of the carport. A covered concrete porch is located on the west side of the house. A concrete patio covered by a redwood deck is located on the past side of the house, and a wood balcony extends from the carport along the south and east sides of the house to the deck.

The lot slopes downward from west to east. The front yard is flat and fully landscaped. The side yards slope to a flat landscaped section of rear yard. A fenced dog run is located on the north side of the house. In the rear yard there is a large deciduous tree next to the deck and a clothesline. Wastewater from the basement is pumped from the basement sump to a drain pipe under the rear lawn. From the edge of the rear lawn to the east lot line the property is rocky, not landscaped, and slopes downward very steeply.

The residence is less than 50 years old and therefore meets the requirements of Stipulation I.a. of the Programmatic Memorandum of Agreement between the DOE, the Colorado State Historic Preservation Officer and the Advisory Council on Historic Preservation.

2.2.2 Utilities

Utilities are serviced to the property as follows:

Electric power - Overhead from utility pole on northeast corner of lot to east side of house.

Telephone - Overhead from utility pole on northeast corner of lot to east side of house.

Water - Underground from Riverview Drive.

Gas - Underground on north side of house.

Sewer - Underground from Riverview Drive.

2.2.3 Site Plan and Survey Data

See Figure 2.2 for a site plan of the property. Property survey data and photos are presented in Table 2.1 and Figures 2.3, 2.4, 2.5, 2.6, and 2.7.

Table 2.1

PROPERTY SURVEY DATA

GENERAL:			
Site Location:	Durango		
Property Addre	ss: 128 Riverview Drive		The State of the Joseph
Owner's Name:	Richard and Mary Thomas	Address: Same	
Lot No.: 25	Property T	ype: Residentia	1
Occupancy Grou	p: Adults: 3	Children:	
Survey Complet	ed By: R. Livengood/C	. Sanders-Meena	Date: 5-16-84
Property Descr	iption - Exterior:		
Dwelling: Sq.	Ft.: 2,590		
Lev	els: Single Story with	Basement	
Con	struction Type: Wood Fra	me with Board and	Batting Siding; Wood
	Siding o	n East Side of Ba	sement
Fou	adation: Concrete Basem	ent	
Garage: Singl	e Car Attached Wood Fram	e Carport	
Storage Bldg:	Prefab: None		
	Other:		
Improvement	Additions:	Porches:	Covered Conc. West Side
to Dwellings:	Deck: Redwood on S	ide Patio:	Conc. Covered by Deck
	Other: Wood Frame B	alcony to Deck Al	ong Rear of House
Driveway:	Concrete: Two Car from	Street Paved:	
	Gravel:	Other:	
Sidewalks:	Concrete/Paved: As Note	d on Drawing	
	Other:		
Fences/Gates:	Wood:	Other:	Wire Mesh Dog Run on
	Chain Link:	And the second	North Side Backyard

Table 2.1 (cont'd)

		PROPE	RTY SURVEY	Y DATA		
Site Location	: Dur	ango			<u> </u>	
Property Addr	ess: <u>128</u>	Riverview	Drive			
Grounds:	Lawn:	Full Front	Yard, Bad	ck Yard t	o Sloped Area	
	Trees:	Numerous m	ature tree	es throug	hout the prope	erty
	Shrubs:	Numerous b	ushes and	hedges a	along front of	the house
	Garden:	Small Plot	off Patie	0		
	Grading:	1 to 1 Slo	pe from E	ige of Re	ear Lawn to Eas	st Property
		Line; Fron	t Yard Abo	out 8.0'	Above Rear Law	med Area
Soil Type: _T	opsoil in L	awned Area;	Sloped A	rea Rocky	,	
Existing Surv	ey Plot: Y	es				
Property Desc	ription - I	nterior: I	nterior Co	ontaminat	ion Under Base	ement
Basement			Walls			
Room	Floor	E	W N	S	Ceiling	Comments
Recreation	Linoleum T	ile -Dry Wa	11-Wd Pane	el Dry Wa	all Dry Wall	2-10"×10"*
Dark Rm/Bath	Linoleum T	ileDr	y Wall		Dry Wall	
Utility Room	Linoleum T	ileDr	y Wall	Ac	coustic Tile/Su	ump in Corner
Office	Linol Tile	/CarpDr	y Wall	Ac	coustic Tile	
Storage	Concrete	(E) Unfi	nished-Con	ncrete	Unfinished	Furnace &
		Stu	d Wall (W	N,S)		Hot Water
						Heater
						Located in
						store room
*Wood Center	Support Bea	ms in Rec R	oom			
Ut'lities:						
Heating:	Gas:	x		Elect	ric:	<u> </u>
	Hot Water:	Gas and So	lar	Other	: Solar Pane	l on Roof
Air Cond:	Gas:			Heat	Pump:	Later Trans


Radiological and Engineering Assessment: Property DU-031


Table 2.1 (cont'd)

PROPERTY SURVEY DATA

		E 200	OLEMII 5	OKAEL DATA			
Site L	ocation:	Durango					
Proper	ty Address:	128 Rivervie	w Drive				
Mlectr	ic Line Locati	on: Overhead	from Ut	ility Pole	on NE Co	orner of Lot	
	ne Location:						
Water	Line Location:	Undergrou	und from	Riverview	Drive		
						orner of Lot	
	ng Codes and Z					\$	
c	odes !	Local	!	State		Federal	
Buildi	ng Work !	UBC					
	1						
	ka: Front: _						
	Rear:					I - FL I A TI I	
	Side:						
	Other:						
Photog	raphs:						
Roll F		Des	cription			Directio	n
1	18	Front				Looking Southe	
1	15		717	House		Looking Northe	
1	13		f Proper			Looking Northw	
1	13		f House			Looking Southw	
7	28		nt Rec F	loom		Looking Northe	
1	35			ige Room		Looking Southw	
7	34		nt Offic			Looking Southe	
7	33			ty Room		Looking Southe	

6

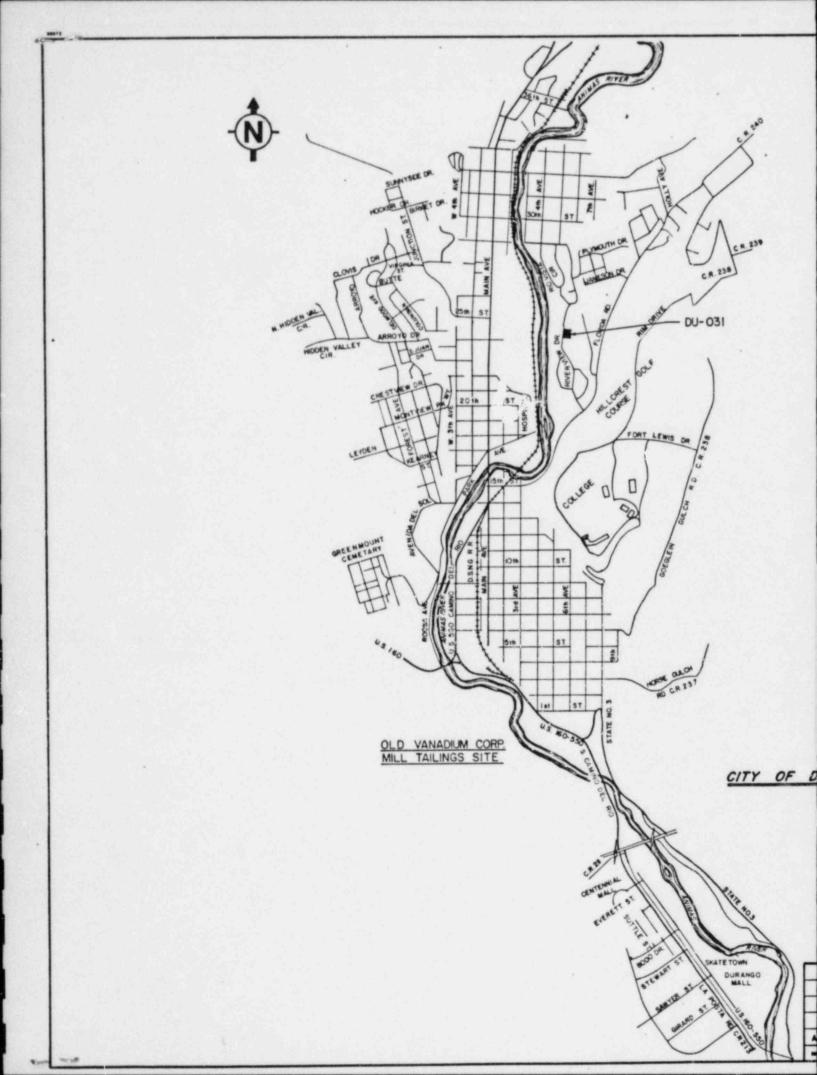

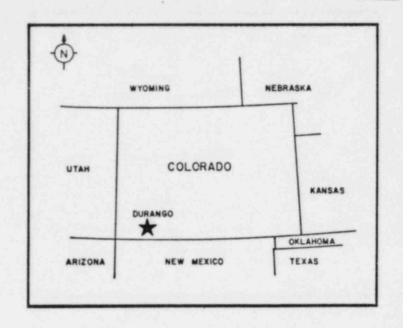


Also Available On Aperture Card

TI APERTURE CARD

URANGO, COLORADO

8507 09 0287 -01

								U.		EPARTN			ENERGY	
								CAM CAM			DURANG	AP (DU-031 DRADO COIAL ACTION PROJECT	
				-				NR	PATE	NR	ANAGER	BATE	NR	DATE
229.50	FINAL REA SUBMITTAL	up	-119	*	M	030	_	@ K	IORRIS NUDS	SON	PROJE	DE-	ACO4-83AL187	96 PEV
DATE	REVISIONS	St.	DEDE:	Litt	011	EMB	306						DU-031-005,	11

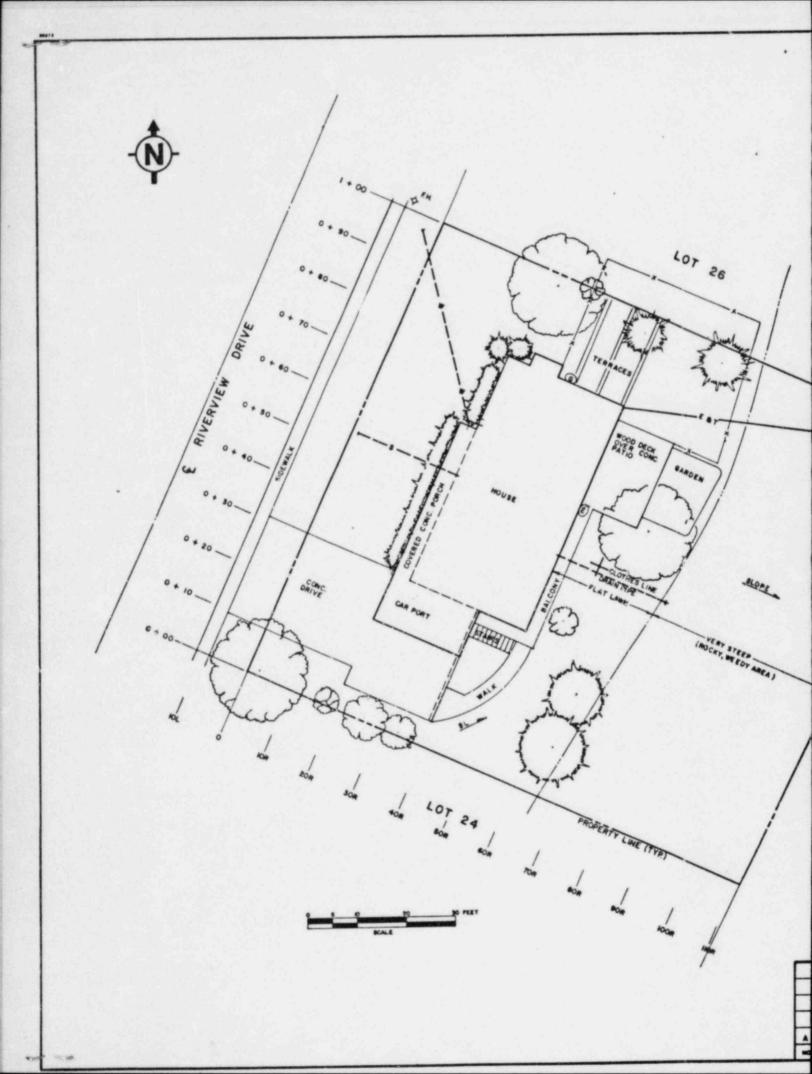

LEGEND

	WATER LINE
	GAS LINE
GM	GAS MAIN
s	SEWER LINE
SM	SEWER MAIN
STM-	STORM SEWER
E	ELECTRICAL LINE
T	TELEPHONE LINE
Tv	CABLE TV
	PROPERTY LINE
	FENCE LINE
@G,WarE	METER
Ø g or w	VALVE
	PROPERTY PIN
	POWER POLE

NOTE: OVERHEAD SERVICE DENOTED BY SOLID LINE. UNDERGROUND SERVICE DENOTED BY DASHED LINE.

Aportore Card


TI APERTURE CARD

8507090287-02


Sare .	FINAL REA SUBMITTAL	ימי	UP Depe	TIP	M	100	-	MORE KNUD	ASON SEN		ACO4-83AL1879	6 REV.
		1	F				F	REVIEWED TO THE PROPERTY OF TH	SITE	PLAN DURANGO, COLO	DIAL ACTION PROJECT	DATE
									DEPARTM			



Front of House Looking Southeast

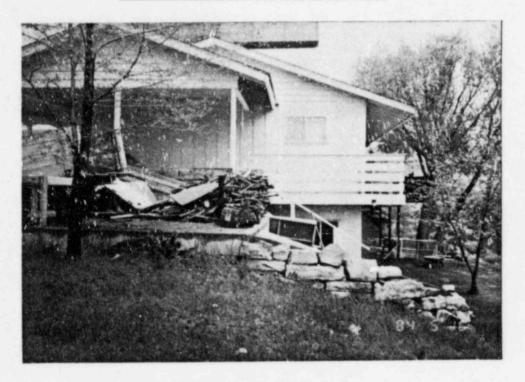

South Side of House Looking Northeast
Figure 2.3 Property Photos

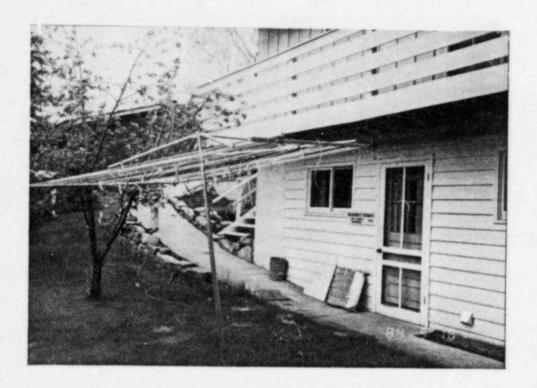


Rear of Property Looking Northwest



Rear of House Looking Southwest
Figure 2.4 Property Photos



Basement Recreation Room Looking Northeast

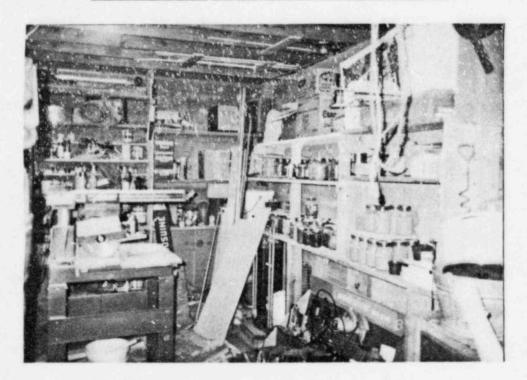


Basement Storage Room Looking Southwest

Figure 2.5 Property Photos



Basement Office Looking Southeast

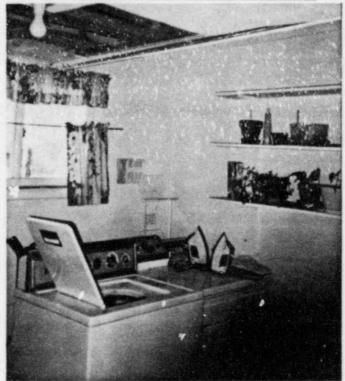

Basement Utility Room Looking Southeast

Figure 2.6 Property Photos

3.0 RADIOLOGICAL SURVEY AND ASSESSMENT

3.1 Gamma Exposure Rate Survey

3.1.1 Survey Method

The outdoor contaminated areas identified in the inclusion survey (Results of the Radiological Survey at Property DU-031, ORNL, June 1983) were surveyed in accordance with the RAC UMTRA Procedure 019. The survey was made on a 10' x 10' grid. A surface scan was made of the entire gridded yard with a gamma scintillometer to identify the boundary of the contamination.

An indoor gamma survey was conducted inside the house in areas identified in the inclusion survey. This indoor survey was not conducted on a grid.

3.1.2 Survey Results

Surface gamma readings on the property, as shown in Figure 1, range from 14 to 48 micro R/hr. This may be compared with the background for the Durango site of 14 micro R/hr. Table 3.1 lists surface gamma readings greater than 15 micro R/hr.

Indoor surface gamma readings range from 15 to 100 micro R/hr. The highest readings are in the basement, as described in Table 3.2.

3.2 Borehole Survey

3.2.1 Survey Method

A gasoline-powered hand auger was used to drill 4-inch diameter holes in and around the regions identified as contaminated during the gamma survey. The holes were surveyed in compliance with the RAC UMTRA Procedure 018. Holes were placed near the walls of the structure, in outdoor areas, and in the basement.

3.2.2 Survey Results

Contamination was found in 4 of the 22 outdoor holes and in all of the 5 indoor holes augered. The location and depth of the contamination is described in Tables 3.3 and 3.4 and is shown in Figure 3.1. Large rocks prevented drilling through the vertical extent of contamination at all drilling locations. Contamination extends more than 15 inches below the surface. Gamma readings in boreholes were not diminishing with increasing depth, suggesting that contamination may be 30 inches deep or more. The indoor boreholes demonstrate that contamination is underneath the basement floor.

3.3 Radon/Radon Daughter Survey

No radon/radon daughter surveys were performed inside the house at the property. The inclusion survey reported an instantaneous radon daughter concentration measurement of 0.09 WL in the basement.

3.4 Estimated Extent of Contamination

Three areas of contamination were identified in the survey. Area A consists of the entire area underneath the house and concrete walk east and south of the house. Contamination does not appear to be inside the house itself. The known depth of contamination is 15 inches; however, contamination may extend to 30 inches or more.

Area B is adjacent to the house and is actually an extension of Area A; it is treated separately here for convenience. As with Area A, the depth of contamination is at least 15 inches and may be 30 inches or more.

Area C consists of a small area at the back of the carport. The depth of contamination in this area is greater than 15 inches. (The retaining wall is approximately 3 feet high).

Table 3.1 OUTDOOR SURFACE GAMMA SURVEY Property DU-031

POINT	Micro R/hr	
0+50,00R	16	
0+60,00R	18	
0+70,00R	16	
0+40,10R	16	
0+50,10R	28	
0+60,10R	37	
0+70,10R	18	
0+40,20R	16	
0+50,20R	21	
0+60,20R	48	
0+70,20R	18	
0+80,20R	16	
0+83,30R	16	
0+20,40R	18	
0+30,40R	16	
0+82,40R	16	
0+90,40R	16	
0+40,50R	17	
0+45,50R	17	

Table 3.1 - Cont'd. OUTDOOR SURFACE GAMMA SURVEY Property DU-031

POINT	Micro R/hr	
0+50,50R	17	
0+60,50R	18	
0+70,50R	18	
0+80,50R	16	
0+40,60R	16	
0+50,60R	16	
0+90,60R	16	
0+78,85R	16	
0+50,90R	16	
0+50,100R	16	
0+81,95R	21	

Table 3.2 INDOOR SURFACE GAMMA SURVEY Property DU-031

ROOM	POINT	Micro R/hr
17	NW	100
	NE	23
	Center	15
	SW	44
	SE	15
15	NW	82
	NE	55
	Center	55
	SW	81
	SE	43
13	IW	38
	NE	25
	Center	47
	SW	78
	SE	23
18	NW	60
	NE	92
	Center	51
	sw	48
	SE	52

Table 3.2 - Cont'd. INDOOR SURFACE GAMMA SURVEY Property DU-031

ROOM	POINT	Micro R/hr
14	Center	77
16	NW	87
	NE	27
	Center	61
	sw	82
	SE	45
18A	NW	64
	NE	77
	Center	57
	sw	45
	SE	73

TABLE 3.3 OUTDOOR BOREHOLE SURVEY PROPERTY DU-031

HOLE	LOCATION	CONTAMINATION DEPTH
1	0+40,14R	None
2	0+40,00R	None
3	0+60,10R	0-12"+
4	0+50,10R	0-12"+
5	0+60,05R	None
6	0+53,14R	0-12"+
7	0+50,00R	None
8	0+70,10R	None
9	0+80,18R	None
10	0+70,00R	None
11	0+60,00R	None
12	0+60,05L	None
13	0+80,00R	None
14	0+21,38R	0-15"+
15	0+23,34R	None
16	0+60,54R	None
17	0+80,50R	None
18	0+38,55R	None
19	0+33,18R	None
20	0+82,23R	None

Radiological and Engineering Assessment: Property DU-031


TABLE 3.3 - Cont'd. OUTDOOR BOREHOLE SURVEY PROPERTY DU-031

HOLE	LOCATION	CONTAMINATION DEPTH
21	0+85,30R	None
22	0+15,25R	None

NOTE: All holes drilled as deep as possible.

TABLE 3.4 INDOOR BOREHOLE SURVEY PROPERTY DU-031

HOLE	LOCATION CONTA	CONTAMINATION DEPTH			
1A	Office - Room 17	0-14"+			
2A -	Workshop, Room 18	0-8"+			
3A	Room 13	0-15"+			
4A	Closet Room, Room 18A	0-15"+			
5A	Workshop # 2, Room 18	0-7"+			
possibl or unti	es were bored through conce, until large rocks prevent loose sand was encountered would not hold together.	nted drilling deeper			

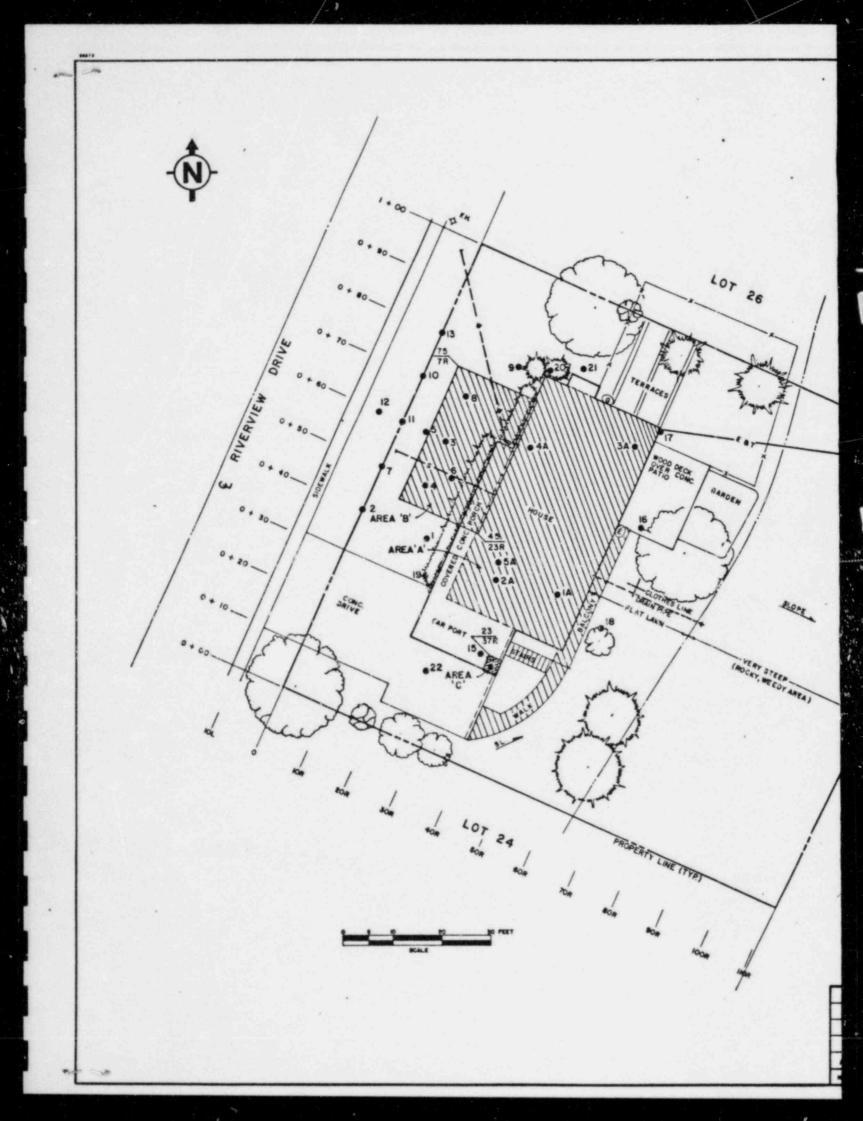

LEGEND

@ AUGER HOLE DESIGNATION

ESTIMATED DEPTH OF CONTAMINATION

18"

36"

Apertare Card

TI APERTURE CARD

8507090287-03

+	172		REVISIONS	CRAPA	0404	Manager L	CAPILL .	P404	-	KNUDSEN		DU-031-015 A				
*	-	FINAL RE	A SUBMITTAL		-					@	MORRISON		DE- ACO4 - 83AL18796			6
\pm								-		NR	BAYE	NR			N R	DATE
+	-				-					MECOMMENDED		URANIUM MILL	TAILINGS RE	MEDIAL	ACTION PROJECT	44
										MENIEWED	RAD	IOLOGICA			DATA DU-03	1
										CAM			IGURE 3.	_		
										U.		EPARTN				

4.0 ENGINEERING ASSESSMENT

Engineering options were formulated and evaluated based on the radiological and engineering assessment for this property. Factors forming the basis of the evaluation were: the extent and location of the contamination, construction costs, and required demolition and constructibility for the various options. Results of the evaluation are detailed below.

4.1 Evaluation of Options

4.1.1 Options

Two options were evaluated for property DU-031:

- No action should be taken.
- Complete decontamination of the property including retrieval of the contaminated material and restoration of the property.

Option 2 would include the following:

- Remove and store furniture and miscellaneous items during excavation and replace when construction has been completed.
- Demolish basement and front porch as illustrated in Figure 4.2.
- o Excavate contaminated material within the limits and depths as indicated in Figure 4.1.
- o Backfill excavated areas with common fill and top with structural fill in concrete areas and with topsoil and sod in lawn area.
- Construct new basement and front porch as indicated in Figure 4.3 and 4.4
- Dislocation of the occupants will be required for remedial action as per Vicinity Properties Management and Implementation Manual, Section 3.3.2, Option 2 as follows:

Option 2: Dislocation to living quarters of owner's or tenant's choice during remedial action. The owner or tenant pays the costs associated with this option and is reimbursed by DOE. Reimbursements include the actual cost, or a reasonable rental rate normally paid in the area for housing, whichever is less. Telephone and utility transfer costs are also reimbursed. No allowance for food costs are made. Expense report forms are supplied by DOE or its representative and submitted to the DOE on a monthly basis by the property owner or tenant.

4.1.2 Costs


Estimated costs for the activities associated with Option 2 are detailed in Table 4.1. Costs include labor, insurance, material, equipment, supplies, overhead, profit, and contingency. All costs are listed in 1985 dollars. It is anticipated that the time required for the subcontractor to complete the work will be 40 to 45 days.

4.2 Recommendation

The limited cost and amount of remedial action work precluded evaluating any more than these two options. The results of the radiological assessment concluded that contamination levels on the property exceeded EPA guidelines. Therefore, based on these guidelines, it is recommended that Option 2, decontamination of the property, be pursued. The total estimated cost for Option 2 is \$57,000.00.

Table 4.1 OPTION 2 COSTS

Activity	Init Price	Qu	antity	Estimated Cos
Demolish and Remove Basement				
Framing and Stairs	1.05	1,360	cf	1,428.00
Shore Southeast Wall and	1.05	1,500	51	1,420.00
Center of Basement		LS		3,000.00
Shore Front Porch and		40		3,000.00
Remove Glass and Framing		LS		1,500.00
Remove Wood Dect		LS		617.00
Demolish Basement Slab	2.90	1,225	sf	3,553.00
Basement Excavation	56.04		су	4,764.00
Demolish and Remove Sidewalk,			-,	4,704.00
Porch and Carport Slab	2.90	317	sf	920.00
Machine Excavation	8.30		су	340.00
Backfill (Hand)	22.40		су	1,008.00
Backfill (Machine)	7.20		су	187.00
Structural Fill	26.40		су	792.00
Copsoil	26.40		су	237.00
od	3.00		sy	156.00
ledges	50.00		ea	1,000.00
Basement Restoration Walls		LS		5,645.00
ront Porch		LS		1,235.00
Remove and Reinstall				
Mechanical Equipment		LS		1,430.00
Construct Concrete Slabs	3.50	1,550	sf	5,425.00
lood Deck Restoration		LS		1,148.00
Slectrical Work		LS		720.00
louse Cleaning		LS		400.00
Dislocation Costs				
Packing, Moving, and				
Storage		LS		2,500.00
louse Rental	700.00	month		1,400.00
eposits (Non Refundable)				
Gas \$ 75.00				
Electric 80.00				
Phone 100.00				
Water 30.00				
Total				285.00
Subtotal				39,690.00
5% Subcontractor's C				1,985.00
20% Overhead and Pro	fit			7,938.00
Subtotal				49,613.00
15% Contengency				7,442.00
Total (Rounded)				57,000.00

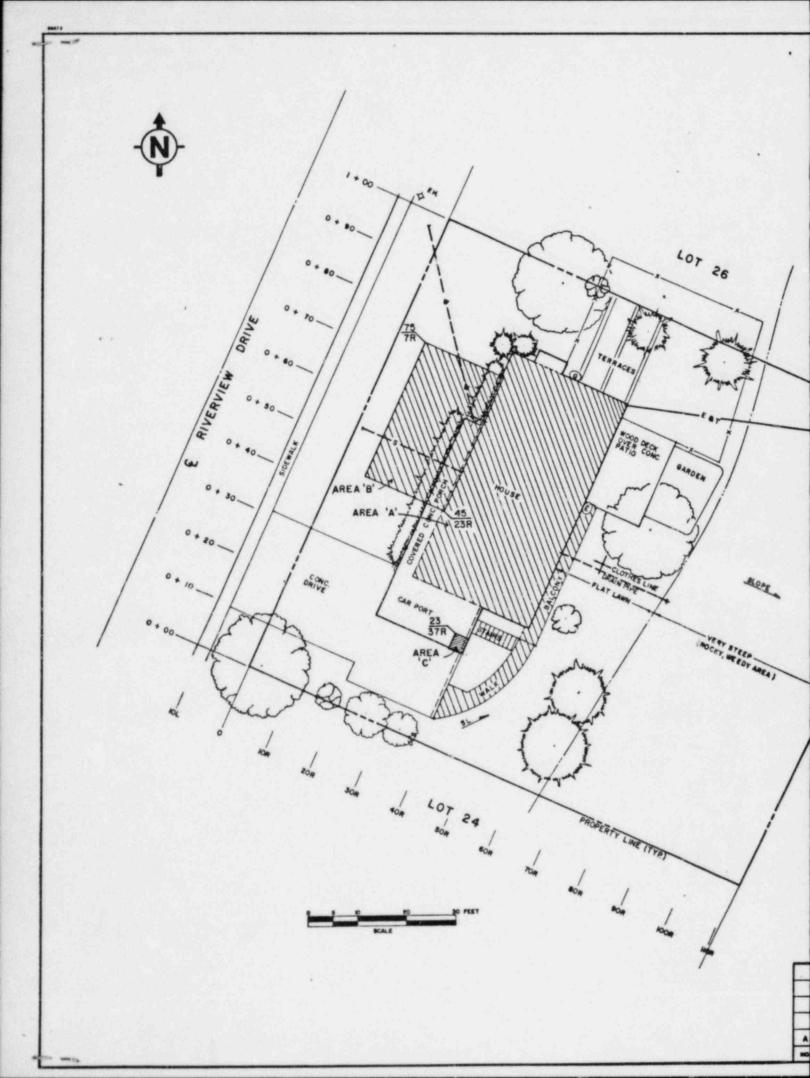

TI APERTURE CARD

LEGEND

WATER LINE GAS LINE -G-GAS MAIN GM - 5-SEWER LINE SAS SEWER MAIN STM STORM SEWER ELECTRICAL LINE ·E. TELEPHONE LINE CABLE TV PROPERTY LINE FENCE LINE DG, WOE METER OG GET W WALVE PROPERTY PIN POWER POLE

NOTE: OVERHEAD SERVICE DENOTED BY SOLID LINE. UNDERGROUND SERVICE DENOTED BY DASHED LINE.

NOTES

\$ 95R

THE LATEST REVISION OF THE FOLLOWING TECHNICAL SPECIFICATIONS APPLY TO THE REMEDIAL ACTION WORK REQUIRED : DR PROPERTY NO. DU-031.

SECTION 02050 DEMOLITION

SECTION 02110 CLEARING AND GRUBSING

SECTION 02130 CONTAMINATED MATERIAL REMOVAL

SECTION 02200 EXCAVATION AND SACRFILL

SECTION 03300 CAST-IN-PLACE CONCRETE

- WTILITY LOCATIONS ARE FOR REFERENCE ONLY. ACTUAL LOCATIONS SHALL BE DEFERMINED BY THE SUBCONTRACTOR PRIOR TO STRET OF CONSTRUCTION.
- THE EXCAVATION LIMITS AND DEPTHS ARE BASED ON A LIMITED NUMBER OF BORINGS TAKEN DURING THE RADIOLOGICAL SURVEYS OF THIS PROPERTY. ADDITIONAL RADIOLOGICAL SURVEYS PERFORMED DURING REMEDIAL ACTION MAY REQUIRE MORE OPLESS EXCAVATION TO BE TAKEN FROM THE DESIGNATED AREAS. ALL CHANGES TO THE LIMITS AND CEPTHS OF EXCAVATION AS SHOWN ON THE DESIGN DRAWINGS SHALL BE ASD DIRECTED BY JUNE CONTRACTOR'S AS DIRECTED BY THE CONTRACTOR'S REPRESENTATIVE.

cox at we the

4 REMOVE ROCK AS INDICATED.

FINAL REA SUBMITTAL

DATE

SCOPE OF WORK:

MOTE: CHINES MILL BE RESPONSIBLE FOR REMOVING ALL ITEMS FROM THE RESIDENCE BEFORE CONSTRUCTION BEINGS.

AREL "A"

- REMOVE AND SALVAGE WOOD DECK AND REPLACE WHEN CONSTRUCTION HAS BEEN COMPLETED.
- PROVIDE VISQUEEN FOR DUS! PROTECTION IN STAIRWELL ENTRANCE.
- DEMOLISH AND REMOVE BASEMENT WALL AND INTERIOR WALLS AS INDICATED IN FIGURE
- DEMOLISH AND REMOVE CONCRETE SIDEWALK AND BASEMENT SLAB WITHIN THE LIMITS AS INDICATED IN FIGURE 4.1.
- EXCAURTE CONTAMINATED MATERIAL WITHIN THE LIMITS OF EXCAUATION TO A DEPTH OF 18 INCHES.
- SACKFILL EXCAUATED AREA WITH COMPACTED COMMON FILL AND TOP WITH & INCHES OF STRUCTURAL FILL.
- CONSTRUCT NEW BASEMENT SLAS AS INDICATED IN FIGURE 4.4.
- CONSTRUCT NEW 4 INCH THICK CONCRETE SIDEMALK TO SAME SIZE AND ELEVATION OF THAT REMOVED.
- CONSTRUCT NEW INTERIOR AND EXTERIOR WALLS AS INDICATED IN FIGURES 4.8 AND 4.4.

....

- REMOVE AND SALVAGE FRONT PORCH ENTRANCE AS INDICATED IN FIGURE 4.2
- DEMOLISH AND REMOVE CONCRETE PORCH
- EXCAVATE AREA "B" TO A DEPTH OF 18
- BACKFILL EXCAUATED AREA WITH COMMON BACKFILL AND TOP WITH 6 INCHES OF STRUCTURAL FILL IN CONCRETE AREA AND WITH 6 INCHES OF TOPSOIL AND SOO IN LAWN AREA.
- CONSTRUCT NEW 4 INCH THICK CONCRETE PORCH TO SAME BIZE AND ELEVATION OF THAT REMOVED.
- CONSTRUCT NEW PORCH ENIRANCE TO SAME SIZE AS THAT REMOVED.
- REPLACE HEDGES REMOVED WITH SAME TYPE AND SIZE AS THAT REMOVED.

48EA *C*

- REMOVE CARPORT SUPPORT AND SHORE ROOF AS REQUIRED
- SAWCUT CARPORT SLAB WITHIN THE LIMITS OF CONTAMINATION AND REMOVE
- HAND EXCAUATE AREA "C" TO A DEPTH OF 36 INCHES.
- BACKFILL EXCAVATED AREA WITH COMPACTOMMON FILL AND TOP WITH 6 INCHES OF STRUCTURAL FILL.
- CONSTRUCT NEW CONCRETE SLAS TO COVER AREA REMOVED AND REPLACE SUPPORT.

U.	. S	. DEF	AR	TM	ENT	OF	EN	IERG	1
		ALBUC	UER	QUE	NEW	ME	KICO		
SIGNEDICE ANN	-			-		-	- 0	AA	7

8507 09 02 87-04 DE CAM EXCAVATION AND RESTORATION DU-031

DURANGO, COLORADO


URANILM MILL TALINGS REWEDIAL ACTION PROJECT

NECOMMENCE O MATE DOE PROJECT MANAGER BATE BOS PROJECT ENGINEER NR NR NR הע למשוחם



DE-ACO4-83ALI8796

DU-031-020-

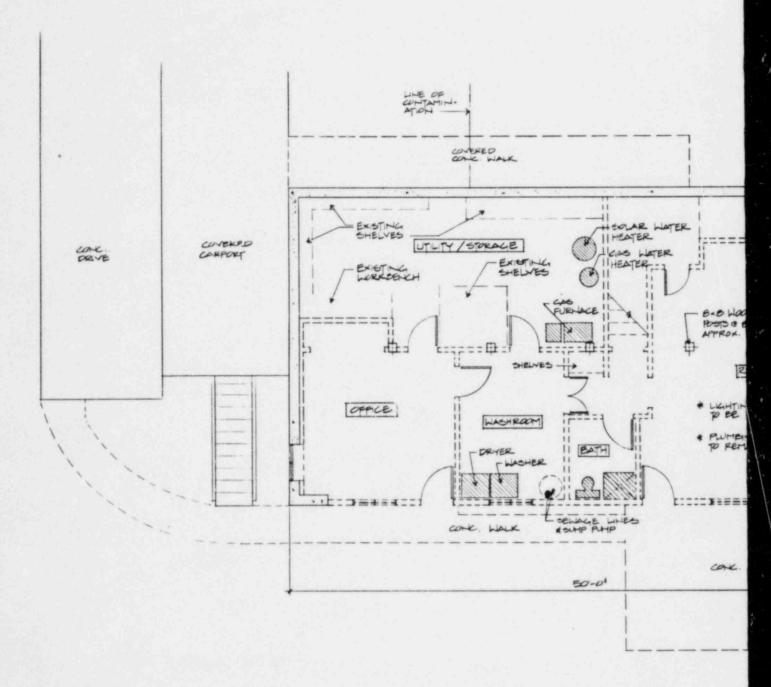

DEMOLITION PLAN-BASEMENT Available On Aperture Card

TI APERTURE CARD

NOTES

LINE OF CONTAMINATION

38

- EXISTNE

====;

C. ROOM

IG & MECHANICAL NH SAME


C3====C:::-45*

- INDICATES STRUCTURE TO BE TORN OUT I REMOVED EXCEPT SUMP PUMP.


STORED PURING WHATRUCTION

- ! ALL STUD PARTITIONS IN BASEMENT AR A TO BE REMOVED SO AS EXCAVATION MAY BE DONE WITH MINIMAL DESTRUCTION.
- 2 CONCRETE FOUNDATION TO REMAIN INTACT DURING ALL PHASES OF CONSTRUCTION.
- 3 WOUD FOOTS TO REMAIN DURING START OF EXCAVATION. LEAVE A 2-0' x 2-0' FOOTHOLD UNDER POOTS, EXCAVATE REMAINING AREA.
- 4. PROVIDE POST & BEAM SUHPORT & 6-0'0C. ALCHG EAST HALL DURING EXCAVATION. FOOTHOLD SAME AS STMT. 45
- 5. AFTER REMAINING EXCAVATION HAS BEEN COMPLETED PROVIDE TEMPORARY SUPPORTS PLACED BETHERN EXISTING SUPPORTS & EXCAVATE.
- 6 RESTORATION TO BE COMPLETED AS FER DU-081-022.
- T DALVAGE DOORS I WHOOMS FOR USE IN RESTORATION. INTERIOR AS WELL AS EXTERIOR
- & some flectrical & mechanical alterations may be required . Field verify.
- 9 ALL CONSTRUCTION TO COMPLY WITH STATE AND LOCAL CODES.
- P. HEST CHTRANKE TO BE EXCAVATED AS PER DU-021-020.
- II. SUPPORT PROVISIONS WILL BE HEEDED FOR ROCE OVER WEST ENTRANCE DURING EXCAVATION. DALVACE EXISTING COLS. WINDOWS AND DECOR. TRIM FOR USE IN RESTORATION. RESEAL & PAINT DE MATCH EXISTING.
- 18. DEMOLISH I REMOVE COIL, WALK & WEST ENTRANCE AS NEEDED . EXCANATE AND RESTORE AS PER DU-051-020
- 18 PROTECT SUMP PUMP I SENAGE LINE PLANT EXCAVATION (RESTORATION
- A SALVACE ALL ELECTRICAL & MECHANICAL FIXTURES, BOXES, & FACE PLATES.
 REPLACE ANY THAT FRED HOT MEET CODE REQUIREMENTS.

8507090287 - 05

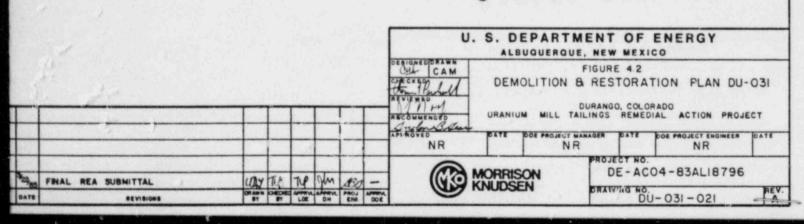



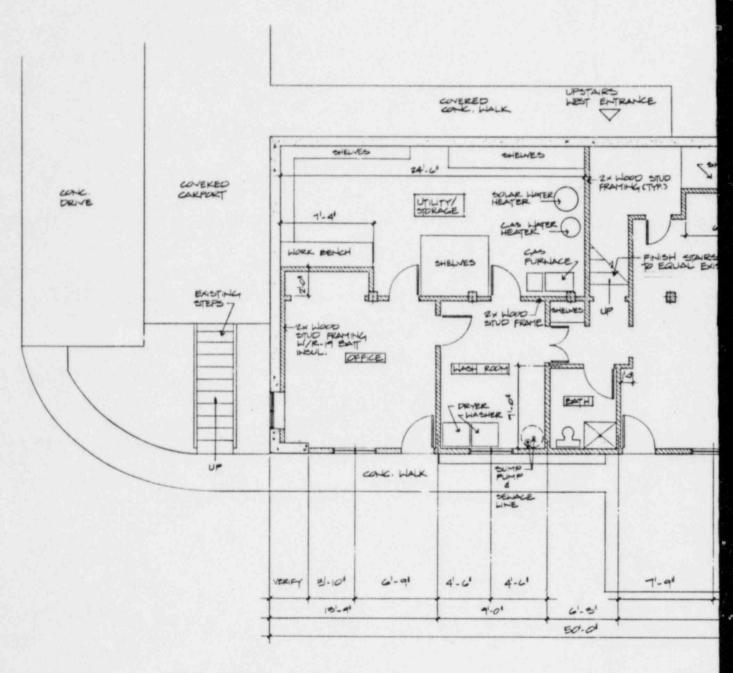

RESTORATION PLAN - BASEMENT




AMILLIAND HOW HOW FRAME STRUCTURE

- HOOD FRAME TO BE 2-4 STUDS @ 16'0C. INSULATE ALL EXTERIOR HOOD FRAME H/R-19 BAT IHOUL.
- 2 REPLACE ALL APPLIANCES TO ORIGINAL PLACEMENT.

Also Available On Aperture Card

TI APERTURE CARD

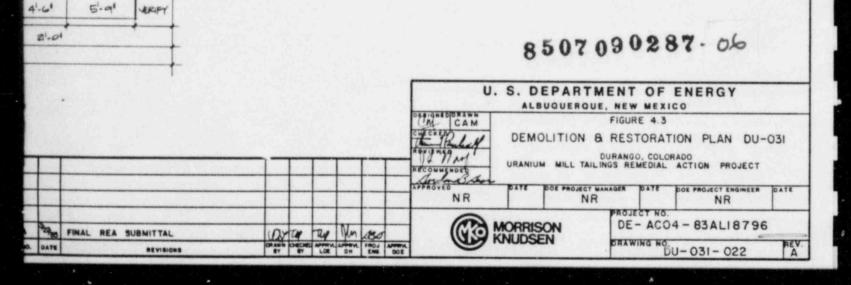

2:2


EC. ROOM


e e 2000 posts (TIP. 1 45)

> 2x ward stud Framing W/V2 GWB FINISH TO EQUAL EXIST

10-,72

Į.

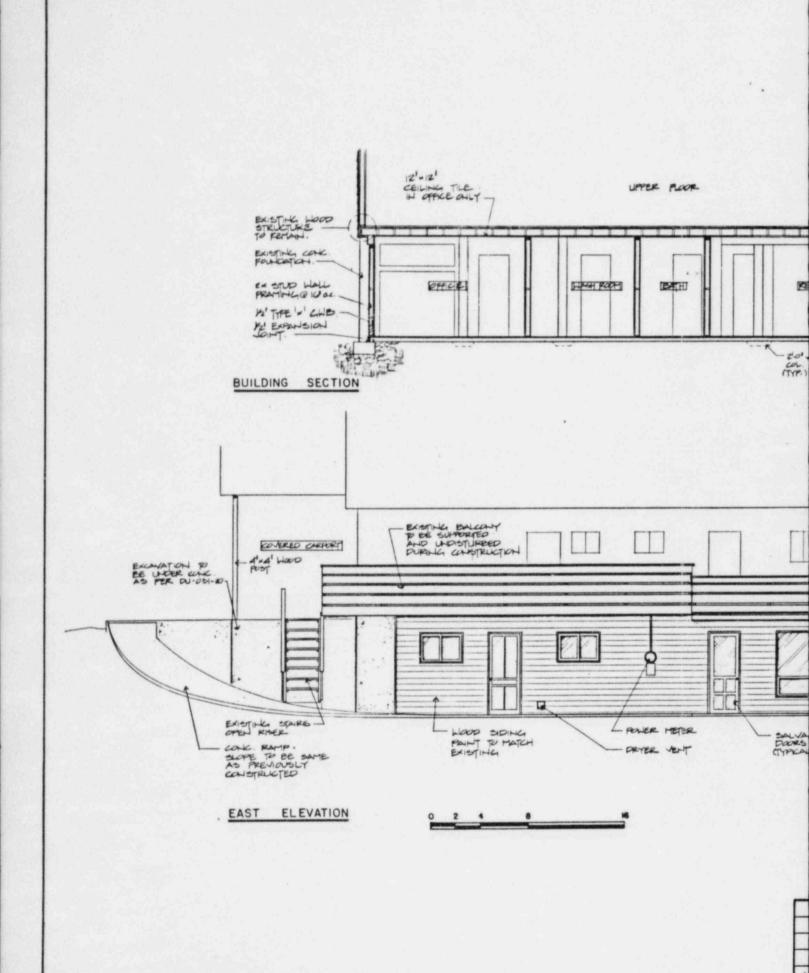

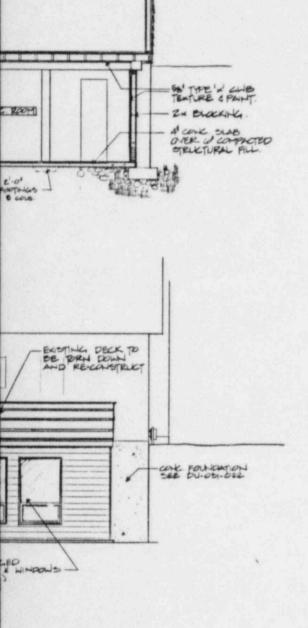

FINAL REA SUBMITTAL

-

DATE

water as In

BY BY LOE OH

NOTES

- 1. MECHANICAL & ELECTRICAL TO BE REPLACED AS PER PREVIOUS FIXURE LAYOUT.
- 2. WALL FINISHES TO MATCH OR EQUAL PREVIOUS FINISHES.
- & FLOOR FIT SHES AS FOLLOWS:

 - OFFICE TO BE CARPET.
 BATH, WASHROOM, REC. ROOM TO BE RESILIENT LINGUISM TILE.
 STORAGE AREAS TO BE EXPOSED CONCRETE.
- 4. ALL STORAGE SHELVES TO BE RE-CONSTRUCTED AND PLACED IN PESITION AS PREVIOUS LAYOUT.
- 5. WOOD PESTS TO BE REPUSITIONED BACK TO ORIGINAL PLACEMENT.
- 6 CEILING FINISHES AS FOLLOWS !
 - OFFICE TO BE 21'x 2' TEXTURED THE
 - BATH , WASHROOM , REC. ROOM TO BE
 - STORAGE TO REMAIN EXPOSED FLOOR JOSTS.

Also Available On Apvertuce Card

TT APERTURE CARD

8507090287 -07

8	(6)		DE-ACO4-83AL18776						
-	APPROVED NR	DATE POE PRO.	NR	DATE	NR	DATE			
_	the Parlay	ELEVATION,	ECT						
	OLA CAM FIGURE 4.4								
	U	. S. DEPAR	TMENT						

5.0 TECHNICAL SPECIFICATIONS

Technical specifications applicable to this property are indexed in Table 5.1 . Specifications previously approved by the Department of Energy (DOE) are noted in the table. Also listed are specifications not previously submitted to the DOE which require approval. The text for these additional specifications follow the table.

Table 5.1 INDEX OF TECHNICAL SPECIFICATIONS

Description			Specifications Previously Approved	Specifications Requiring DOE Approval
SECTION	02050	DEMOLITION	X	
SECTION	02110	CLEARING AND GRUBBING	X	
SECTION	02130	CONTAMINATED MATERIAL REMOVAL	X	
SECTION	02200	EXCAVATION AND BACKFILL	X	
SECTION	02480	LANDSCAPING	X	
SECTION	03300	CAST-IN-PLACE CONCRETE	X	

6.0 CONSTRUCTION DRAWINGS

Listed below is an index of the construction drawings required for remedial action on this property.

Drawing Number	Drawing Title
DU-031-020	Excavation & Restoration DU-031
DU-031-021	Excavation & Restoration Plan DU-031
DU-031-022	Demolition & Restoration Plan DU-031
DU-031-023	Building Section & Elevations DU-031

APPENDIX A
SURVEY DATA LOGS



OUTDOOR GAMMA SCREENING SURVEY DATA SHEET

		SURV	ET DATA SHEET		
LOGGING CRE	Eden		DATE:PROPE	Dully	F_12 PAGE_1_ 6, 1984 1-031
INSTRUMENT	10 NO .: 400 3	220 31972 1444	16527		
BACKGROUND	CALCULATION	N:			
		+ #3	=	+3 = 1	COUNTS IMIN
AREA:		AREA:	AREA:	A	AREA:

AREA:		AREA: _		AREA: _		AREA: _	
POINT	READING COUNTS/.1MIN	POINT	READING COUNTS/.1MIN	POINT	READING COUNTS/.1MIN	POINT	READING COUNTS/.1MIN
+100	13660 12660	5+20 +10R	13/10/3080	e+83 +30K	1650 16170	120 + 4 Ch	13710 14220
+104	13050 12760	0430 +10R	13470 14860	0 + 90 R	14810 13240	6+30 +602	14476 154.20
+104	13040 13290	0-40 +10R	17286 21470	0+100 130R	12300 11916	160R	17240 17080
+100	13020 13620	6150 +10R	55730 42260	0+60R	13580 12860	C+50 +602	16810 16750
+4C	12470 13850	0+60 +10R	8486 0 51530	\$+40R	13380 12186	160%	15360 16040
+100	12560 14810	Of 70	22360 33290	0+2c	23000 20750	0+70 +60K	15860 1478
760	12740 13740	0180 +10K	159.50	0+30x	18370-19570	2+80 +60R	15380 1463
4106	12440 3730	0190 +10R	13300 14590	0+82 +40R	18680 16220	C+90 +602	17240 1446
+104	12590 12480	01/CO +10/2	13870 12970	0+90 +40K	16630 14800	4602	14880 13860
+106	13130 12340	OtEO FOCR	13780 13650	0418012	13310 13541	1701	14210 1386
4166	12960 12470	0410 +20R	15270 13350	0+00 +5012	13730 12760	ETTOR	13752 14141
0+00 K	11460 1760	1202	13280 14460	0+10 +50K	13210 ,2870	0+30 or	12910 1367
0410 +0013	12760 13120	0+30 +20R	13660 16040	+50R	13960 1350	+70R	147/0 1357
0+20 +00R	13/60 13570	0+40 +20R	18830 24510	0+30 +50R	15320 15370	0+402 +202	14480 1379
0+30 +00R	12500 15710	+20R	34430 16210	0+40 +50R	21030 21780	0+50 +70R	14330 13250
0+40 +00R	14870 15880	0+60 +20R	112020 98180	+502	19890 24350	0+60 +70R	13750 13430
CISC +CUR	16690 19880	6470 +20R	24180 26480	6+50 +50R	20640 27580	4302	13920 140
0+60 +00K	12170 21740	C+8C +26R	16570 17560	C+60 +50R	23850 30960	C+80 7722 C+90	14020 13020
OTTO TEOR	16630 17160	0+90 +20R	15150 13990	450R	22890 33000	450K	13860 12980
0+80	14430 14290	120K	12590 12420	450Z	17/80 16090	470R	14/20 14200
ELGOR LOOR	13450 13040	C+CO +30R	13480 12980	07 90 750x	14160 14330	0+00 +80R	13800 1399
C+100 +00R	12450	0+10 +3ER	12660 13320	0+100 +50R	13040 12230	4 SOR	13660 132
HEOR	13280 13360	0+20	13890 16490	460R	12720 3400	780K	12170-1192
OFICK	13766-13530	+3012	15840-14/10	160K	13360 13590	C+30 K	11910 12750

AMERICA is Incter reading all counts



OUTDOOR GAMMA SCREENING SURVEY DATA SHEET

OGGING (CREW: Grn				EET 2		
	Gillen	arch	Ochulh	DA	TE: July	fle,	1484
	Levy	87/3	enally		OPERTY ID:	170-0	3/
NSTRUME	NT 10 NO : 600	2220 #	31972 4440	6527			
ACKGROU	UND CALCULATIO	N:					
#1	+ #2 _		_ + #3	=	+3 =	11,500	_ COUNTS 1MIN
AREA: _		AREA: _		AREA: _		AREA: _	
POINT ID	READING COUNTS/.1MIN	POINT	READING COUNTS/.1MIN	POINT	READING COUNTS/. 1MIN	POINT ID	READING COUNTS/.1MIN
+ 400	13570 12820	4/00K	12410	0+81	33500	1	
	12690 12900	0+40 +100R	13270 12970	+95R	-		
0+60 +80R	13180 2560	FICER	17760 12,90				
FOR	13180 13966	6-60 +100R	1205 1960	1	,	inall	
180 R	127/0 -	0+70 +180A	12050 11960	- 1	OTE Z.	1000	
0740 +80R	12730 12420	6-80 +100R	1363 11920		Rock-as	rock	
0 + 160 + 80 K	1.4466 13580	5490	11980 12470		15 moves	read	ins
C+70 +85R	12460 12690	6+160 +160K	15240 14030		90 to ba		The second second
0+78 +85R	18850 13660	0+00	12270 12570			1	
	13110 13400	0+10 +10R	12830 13010				
0 +10 +90R	11060 13500	0+20 +110 R	13786 13240				
C+20 +90K	12780 12140	0+30 ×/10/2	14680 13750				
6+30 +90x	12590 12400	411016	13080 13080				
C+40 140R	14150 12671	0450 4110 P	12280 12510				
+90x	17/40 12540	0460 41101C	8470 11730			LILL S	
C+60 +90K	12400 12290	0+70 +110×	11920 12450				
0+7C +9CR	12250 12640	4110P2	12500 12690				
Otto + 90R	12300 12496	2+90 +1116 R	11860 13060				
0+40 +80K	11240 12980	C+180 +11012	12276 13410			-	
OF THE	13740 13770	711070					
0-50	13350 12520						
0 ×00 K	11760 3320						
DE14 FISEK	11760 (22) 0 11600 12890						
TICKE TICKE	13552 12776						
FILLE	tenn		103/10	Port	net K	atter	77
TEMARKS	Allen	in	mitte	1	act be	111	PAUS!
1.10	FM?	15/	11.6661		The state of the		,

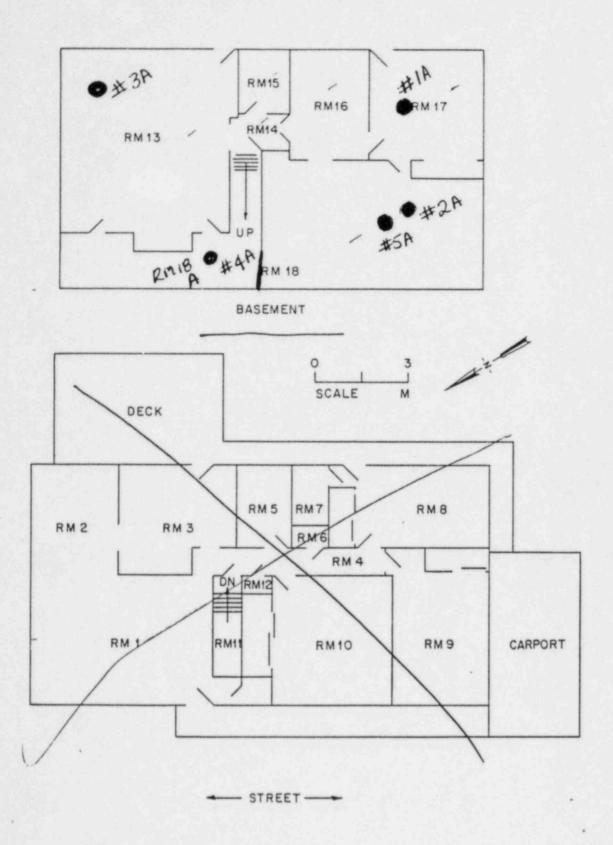


Fig. 4. Floor plan of residence at property DU031.



SURVEY CR	LB	CHUITE	TK		DAT	DET_4_OPERTY ID #_	9,1984	, ,
NOTES:) RECORD S	31982	TIONS ON IN	CONVERSION SUR	ON CURVE #		H COPY.	(ATTACHED
HOT SPOT	COUNTS	RATE	HOT SPOT	COUNTS	RATE	HOT SPOT	COUNTS	RATE
ID#	10.1MIN	u R /fi	LOCATION	10 .1MI N	URIT	ID#	10.+MIN	u P/II
LOCATION	The state of the s	17		ROUM			197340	134700
NE	217010	134480	NE	131480	105420	NW	45300	52870
CENTER	33890	93350	CENTER	105490	135320	CENTER	132310	113540
SIV	87440	54340	SIV	99170	43820	SW	187270	148800
SE	12470	73440	SE	104790	754100	SE	89200	77210
LOCATION:	2 11	-	LOCATION	Annual Committee of the		LOCATION		
	1-00111		NW	Ham	1		142230	83300
NE	184210	123280	NE			NW	17710	-
CENTER	118010	73030		1777/0	142440	CENTER		117500
	183270	123520	SW	177240	142440	SIV	92400	83300
SW SE	84740	69980	SE			SE		103700
	Rozm		LOCATION	١.		LOCATION:		
-		-						
-	74240	-					-	-
NE CENTER	40790				-	-		-
5 W	96850	139420		-				-
46	36920	-						-
OMMENTS	AT EI	KH LOCI				A CONTI		
1-1-0	MEAS	SUREMEN	IT ARE	READIN	G TAK	TEN I M.	ETER A	BOVE



	DEPTH. CASI	JSUAL CON	DILESS OTHERV DITIONS, SUCH A ND THICKNESS I ETC., IN THE	AS THE PRE F USED, CO	SENCE OF WATE	R IN BORE	HOLES AND KNESS,
HOLE ID: 07 40+ 14R TIME DRILLED: TIME LOGGED: SOIL TYPE:		TIME DRIL	0+40+60R LED: GED:	HOLE ID: Z TIME DRIL TIME LOGO SOIL TYPE	GED:	HOLE ID: TIME DRIL TIME LOG SOIL TYPE	
DEPTH	COUNTS/.1MIN	DEPTH	COUNTS/.1MIN	DEPTH	COUNTS/.1MIN	DEPTH	COUNTS/.1MIN
SURFACE		SURFACE		SURFACE		SURFACE	
0"	20210	0"	14640	0"	88460	0"	56290
6"	21690	6"	15550	6"	127980	6"	76410
12"	23620	12"	17850	12"	06580	12/0	89730
18"	20570	1875	10990	18"		18"	
24"		24"		24"		24"	
30 "		30"		30"		30"	
36"		36"		36"		36"	Line
42"		42"		42"		42"	The state of
48"		48"		48"		48"	
54"		54"	H-1.	54"		54"	
60"		60"		60"		60"	
66"	-	66"		66"		66"	
72"		72"		72"		72"	
78"		78"		78"	2	78"	
84"		84"		84"		84"	
90"		90"		90"		90 "	
96"		96"		96"		96"	



LOGGING	CREW CAP	est Ca	gich -			/	PAGE 6_
	Cheliua	raf	church		E - gully	16,1	237
	Levo	n/301	ally		PERTY ID:	10-63	
INSTRUME	NT ID NO. LU		#31982	_ ARE	A. William	90 Ca	
NOTE	S: 1. ALL HOLES		4 16528	VICE NOTE			
NOTES	2. RECORD UN DEPTH, CAS	USUAL CON ING TYPE A DNS, UTILITI	DITIONS, SUCH A ND THICKNESS I ES ETC., IN THE	AS THE PRE F USED, CO REMARKS	SECTION SECTION	AND THICK	(NESS,
	0+60+05R		0753+14R	HOLE ID:	0+50+00R	HOLE ID:	6+70+10R
TIME LOG		TIME DRIL	GED:	TIME DRIL	GED:	TIME LOGO	GED:
SOIL TYPE	E:	SOIL TYPE		SOIL TYPE		SOIL TYPE	
DEPTH	COUNTS/.1MIN	DEPTH	COUNTS/.1MIN	DEPTH	COUNTS/.1MIN	AND DESCRIPTION OF THE PERSON NAMED IN	COUNTS/.1MIN
SURFACE	20101	SURFACE	0 -	SURFACE		SURFACE	226-1
0"	29690	0"	95020	0"	16280	0"	23800
6"	33840	6"	170270	6"	17700	6"	29800
12"	27130	12"	142550	12"	19840	12"	34330
180/6	21980	18-14	102730	1874	18740	18"	35940
24"		24"		24"		24"	35930
30 "		30"		30"		30"	
36"	Control of the	36"		36"		36 "	
42"		42"		42"		42"	
48"		48"		48"		48"	
54"		54"		54"		54 "	
60 "		60"		60"		60"	
66"	*	66 "		66 "		66 "	
72"		72"		72"		72"	
78"		78"		78"		78"	
84 "		84"		84"		84 "	
90"		90"		90"		90"	
96"		96"		96"		96"	
23,0	de Com)bacs	tolis in	d An	Caunto easurer drilled encau	unt	til



		n Be	nacly	DATE PRO	PERTY ID:	5,1	/
NOTES	2. RECORD UNI DEPTH, CASI OBSTRUCTIO	RE 4"DIA. L USUAL CON NG TYPE AL	H 16528 UNLESS OTHERW DITIONS, SUCH A NO THICKNESS I ES, ETC. IN THE	VISE NOTED AS THE PRE F USED, CO REMARKS	ESENCE OF WATE INCRETE CORES SECTION.	ER IN BORE AND THICK	HOLES AND
HOLE ID: Dr FO+1872 TIME DRILLED: TIME LOGGED: SOIL TYPE:		HOLE ID: TIME DRIL TIME LOG SOIL TYPE	LED:	HOLE ID: O TIME DRIL TIME LOG SOIL TYPE	GED:	HOLE ID: (TIME DRIL TIME LOG(SOIL TYPE	GED:
DEPTH	COUNTS/.1MIN	DEPTH	COUNTS/.1MIN	DEPTH	COUNTS/.1MIN		COUNTS/.1MIN
SURFACE		SURFACE		SURFACE		SURFACE	1467
0"	16800	0"	16050	0"	20850	0"	16530
6"	18860	6"	17700	6"	25230	6"	17480
12"	21080	12-8	17990	12/0	25460	12-9	19550
18"		18"		18"		18"	Real Parties
24"		24"		24"		24"	
30 "	Maria Maria	30"		30"		30"	
36"		36"		36"		36"	
42"		42"		42"		42"	Mart to
48"		48"		48"		48"	
54"		54"		54"		54"	
60 "		60"		60"		60″	
66"	-	66"		66"		66"	
72"	370 500	72"		72"		72"	Fig. 4 n. 2-4
78"		78"	- 1711	78"		78"	
84"		84"		84"		84 "	
90"		90"	12 - 2 -	90"		90"	
96"		96"	Phospie III	96"		96"	
96" REMARKS (CP)	all mustock	graci	nd mi	osur lina	til rock	96°	CPM



LOGGING CREW Cleccare Defruit	SHEET8_OF12_PAGE_8
Francit Couch	DATE: July 6,1984
INSTRUMENT ID NO. LUD 2220 P 3/982	AREA: Allange let
W 4410 # 16528	Anen war y

NOTES: 1. ALL HOLES ARE 4"DIA. UNLESS OTHERWISE NOTED.

2. RECORD UNUSUAL CONDITIONS, SUCH AS THE PRESENCE OF WATER IN BOREHOLES AND DEPTH, CASING TYPE AND THICKNESS IF USED, CONCRETE CORES AND THICKNESS, OBSTRUCTIONS, UTILITIES, ETC., IN THE REMARKS SECTION.

HOLE ID: U+SO+CER_ TIME DRILLED: TIME LOGGED: SOIL TYPE:		TIME DRILLED:		HOLE ID: TIME DRILLED: TIME LOGGED: SOIL TYPE:		HOLE ID: TIME DRILLED: TIME LOGGED: SOIL TYPE:	
DEPTH	COUNTS/.1MIN	DEPTH	COUNTS/.1MIN	DEPTH	COUNTS/.1MIN	DEPTH	COUNTS/.1MIN
SURFACE		SURFACE		SURFACE		SURFACE	
0"	14540	0"		0"		0"	
6"	15510	6"		6"		6"	
12"	16600	12"		12"		12"	
18"	16890	18"		18"		18"	
24"	16110	24"		24"		24"	
30 "		30"		30"		30 "	
36"		36"		36"		36 "	
42"		42"		42"		42"	
48"		48"		48"		48"	
54"	LEAD TO SE	54"		54"		54"	
60"		60"		60"		60"	
66"	-	66"		66"		66 "	
72"		72"		72"		72"	
78"		78"		78"		78"	V
84"		84"		84"		84"	
90 "		90"		90"		90*	
96"		96"		96"		96 "	

ministe (cpm) backgrund measurements
23,000 cpm all holes were d'rilled until
racks or debris mes enceuntered.



HOLE ID: 0121+38R

TIME DRILLED

EOREHOLE LOG

LOGGING CREW: E COUCH	SHEET 9 OF 12 PAGE 9
L. BENALLY, JR	PROPERTY ID: DU-031
INSTRUMENT ID NO. LUCILIUM 2220#31482	PROPERTY ID: 41-031
INSTRUMENT ID NO. LUCILIUM 2220 31482 W 4410 # 16528	AREA: Durango, Colorado

HOLE ID: OF23+34R HOLE ID: CFFICE

NOTES: 1. ALL HOLES ARE 4"DIA. UNLESS OTHERWISE NOTED.

TIME DRILLED:

2. RECORD UNUSUAL CONDITIONS, SUCH AS THE PRESENCE OF WATER IN BOREHOLES AND DEPTH, CASING TYPE AND THICKNESS IF USED, CONCRETE CORES AND THICKNESS OBSTRUCTIONS, UTILITIES, ETC., IN THE REMARKS SECTION

TIME DRILLED: 46011 19

TIME DRILLED: /LUCH)

TIME LOG	GED:	SOIL TYPE	GED: Y	ME LOGO	GED:	SOIL TYPE	GED:
DEPTH	COUNTS/.1MIN	DEPTH	COUNTS/.1MIN	DEPTH	COUNTS/.1MIN	DEPTH	COUNTS/.1MIN
SURFACE	96740	SURFACE	14570	SURFACE	134720	SURFACE	124270
0"	110930	0"	17580	0"	140790	0"	173290
6"	325420	6"	22210	6"	424410	6"	442180
16.10"	3:24530	12"	22500	12"	332490	12/5"	525476
19"12	278940	18"15"	20400	19/1/11	270840	18"	
	219410	24"		24"		24"	
30"		30"	2014	30"		30 "	,
36 "		36"	,00	36"		36 "	1
42/		42"	14	42"		42"	South of
48"		48"	0 16	48"	0,1	48"	8 30 10 V
54"	0 64 6,	54"	PED 124	54"	Borne net	54"	Sylve Chr.
60"	30 00 00	60"	30, eye,	60"	30 res ret	60 "	AVC
66 "	By (Boggary Control	66"	30 central	66 "	1 14 'C	66 "	
72*		72"		72"	XH, Oho	72"	
78"		78"		78"		78"	
84"		84"		84"		84"	
90"		90"		90"		90 "	
96"		96"		96"		96"	

REMARKS: ALL INEASCULENTENTS ARE IN COUNTS PER MINUTE (CPM) BACK GROUND MEASUREMENT 23,000 CPM ALL HOLES WERE DRILLED UNTIL WE ENCOUNTERED LARGE ROCKS OR BONLDERS. * DRILLED INTO LEOSE STAND, HILE WOLLD SLUF IN AS SOOM AS ANGER nos pulled on . Estimate TAILINGS 3'-3/2(F) DEEP. THESE HOLES WAS BURED THROUGH CONCRETE



D: PM #18_	TIME DRILL TIME LOGG SOIL TYPE:	COUNTS/.1MIN 28500 19540 20290 21250
135200 18400d 481200	SURFACE 0" 6" 12" 18"	78500 19540 20790 21250
184000	0" 6" 12"	19540 20290 21250
481200	6" 12" 18"	20290
	12"	21250
55 256	18"	
AHPOZA !		20000
Who y	24 700	20900
My Ye.	1	21840
V 10	30"	
ν,	36"	
5 2	42*	
30 3	48"	
4 (54 "	
	60"	
	66"	F
	72"	
	78"	
	84 "	
7-3-1 17	90"	
	96"	
Ł	M. An	60" 66" 72" 78" 84" 90"




NSTRUMEN	1. ALL HOLES A 2. RECORD UNI	HATILL TZ AND AND AND AND AND AND AND AND AND AND	14 31952 16528 UNLESS OTHERW DITIONS, SUCH A	PROF	NCRETE CORES	ER IN BORE	HOLES AND
HOLE ID: 0180150R HOLE ID: 0138155 TIME DRILLED: TIME LOGGED: SOIL TYPE: SOIL TYPE:		(1387 55)R LED: GED:	HOLE ID:		HOLE ID: TIME DRILLED: TIME LOGGED: SOIL TYPE:		
DEPTH	COUNTS/.1MIN	DEPTH	COUNTS/.1MIN	DEPTH	COUNTS/.1MIN	DEPTH	COUNTS/.1MIN
SURFACE	14.370	SURFACE	17270	SURFACE		SURFACE	
0"	17390	0"	17280	0"		0"	
6"	18480	6"	17940	6"		6"	
12"	20110	12"	20970	12"		12"	
18"	20140	18"	27790	18"		18"	
24"		24"		24"		24"	
30 "		30"	PER S	30"		30"	
36"		36"		36"		36"	la servicio de la constante de
42"		42"		42"		42"	
48"		48"		48"		48"	
54"		54"		54"		54"	
60"		60"		60"		60 "	
66"	~	66"		66"		66 "	
72"		72"		72"		72"	
78"		78"		78"		78 "	
84 "		84"		84"	Pro in the	84"	
90"		90"		90"		90 "	
96"		96"	OF THE	96"		96"	
BACIL	GROUND	MEASU	REMENT	23,000	CPIM. A CPIM. A GE ROCILS	11 110	its WER



	L B	PULLAGE			2/1		
		,		PRO	PERTY ID:	DU	1-031
NSTRUME	NT ID NO. LUD.	7270	# 31982		A: DURANC		
			w 14410 #				
	DEPTH, CASI	USUAL CON	IDITIONS, SUCH	AS THE PRE	SENCE OF WATE		
TIME DRI	O+33+18R LED: GGED: E:	HOLE ID: TIME DRIL TIME LOG SOIL TYPE	LED:	HOLE ID: TIME DRIL TIME LOG SOIL TYPE	GED:	TIME DRIL	LED:
DEPTH	COUNTS/.1MIN	DEPTH	COUNTS/.1MIN	DEPTH	COUNTS/.1MIN	DEPTH	COUNTS/.1MIN
SURFACE	17010	SURFACE	17120	SURFACE	16690	SURFACE	
0"	16920	0"	17190	0"	16990	0"	Tr
6"	20220	6"	21130	6"	21390	6"	H-10.
12"	81840	12"	24580	12"	24420	12"	
18/4	21350	18"		18"	23250	18"	+
24"		24"	11-1-11	24"		24"	
30 "		30"		30"		30"	4
36 "		36"		36"		36"	72 -
42"		42"		42"		42"	
48"		48"		48"		48"	
54"		54"		54"		54"	li i u con le con
60 "		60"		60 "		60 "	
66"	-	66"		66"		66 "	
72"		72"		72"		72"	
78"		78"		78"		78"	
84"		84"		84"		84"	
90 "		90"		90"		90 "	
96 "		96"		96"	1000000	96"	
mes	rice (c	m)	Rackgr	accie	in ca	Jures	ments
23,000	cin (22/ 1	all de	ure	circles	un	ul



			chally			29,19 DU-0 30, Can	PAGE / 84 31 laroda
NOTES 22	2. RECORD UNI	USUAL CON	UNLESS OTHERV IDITIONS, SUCH A ND THICKNESS I ES, ETC., IN THE	AS THE PRE F USED, CO	SENCE OF WATE		
TIME DRIL	GED:			HOLE ID: TIME DRILLED: TIME LOGGED: SOIL TYPE:		HOLE ID: TIME DRILL TIME LOGO SOIL TYPE	GED:
DEPTH	COUNTS/.1MIN	DEPTH	COUNTS/.1MIN	DEPTH	COUNTS/.1MIN	DEPTH	COUNTS/.1MIN
SURFACE	13990	SURFACE		SURFACE		SURFACE	
0"	14380	0"		0"		0"	
6"	18390	6"		6"		6"	
12"	21260	12"		12"		12"	
18"		18"		18"		18"	
24"		24"		24"		24"	
30 "		30"		30"		30"	
36"	No en sessi	36"		36"		36 "	
42"		42"		42"		42"	
48"		48"		48"		48"	
54"		54"		54"		54"	
60 "		60"		60"		60"	
66 "		66"		66"		66 "	
72"		72"		72"		72"	
78"		78"		78"		78"	
84"		84"		84"		84"	
90"		90"		90"		90 "	
96"		96"		96"		96 "	
72" 78" 84" 90"	Shaw	72" 78" 84" 90"	le boe	72" 78" 84" 90" 96"	und i	72" 78" 84" 90"	900 cp



UMTRA PROJECT OFFICE P.O. BOX 9136 ALBUQUERQUE, NEW MEXICO 87119