



UNITED STATES
NUCLEAR REGULATORY COMMISSION
WASHINGTON, D. C. 20555

FLORIDA POWER CORPORATION
CITY OF ALACHUA
CITY OF BUSHNELL
CITY OF GAINESVILLE
CITY OF KISSIMMEE
CITY OF LEESBURG
CITY OF NEW SMYRNA BEACH AND UTILITIES COMMISSION, CITY OF NEW SMYRNA BEACH
CITY OF OCALA
ORLANDO UTILITIES COMMISSION AND CITY OF ORLANDO
SEBRING UTILITIES COMMISSION
SEMINOLE ELECTRIC COOPERATIVE, INC.
CITY OF TALLAHASSEE

DOCKET NO. 50-302

CRYSTAL RIVER UNIT 3 NUCLEAR GENERATING PLANT

AMENDMENT TO FACILITY OPERATING LICENSE

Amendment No. 108
License No. DPR-72

1. The Nuclear Regulatory Commission (the Commission) has found that:
 - A. The application for amendment by Florida Power Corporation, et al. (the licensees) dated August 14, 1986, as supplemented October 6, 1986 and revised August 2, 1988, complies with the standards and requirements of the Atomic Energy Act of 1954, as amended (the Act), and the Commission's rules and regulations set forth in 10 CFR Chapter I;
 - B. The facility will operate in conformity with the application, the provisions of the Act, and the rules and regulations of the Commission;
 - C. There is reasonable assurance (i) that the activities authorized by this amendment can be conducted without endangering the health and safety of the public, and (ii) that such activities will be conducted in compliance with the Commission's regulations;
 - D. The issuance of this amendment will not be inimical to the common defense and security or to the health and safety of the public; and
 - E. The issuance of this amendment is in accordance with 10 CFR Part 51 of the Commission's regulations and all applicable requirements have been satisfied.

8809290272 880926
PDR ADUCK 05000302
PNU


2. Accordingly, the license is amended by changes to the Technical Specifications as indicated in the attachment to this license amendment, and paragraph 2.C.(2) of Facility Operating License No. DPR-72 is hereby amended to read as follows:

Technical Specifications

The Technical Specifications contained in Appendices A and B, as revised through Amendment No. 108, are hereby incorporated in the license. Florida Power Corporation shall operate the facility in accordance with the Technical Specifications.

3. This license amendment is effective as of its date of issuance.

FOR THE NUCLEAR REGULATORY COMMISSION

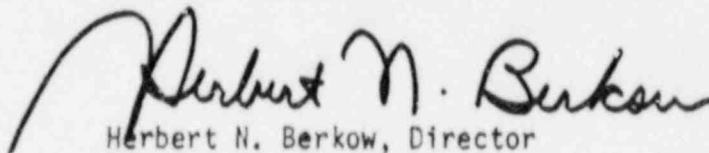

Herbert N. Berkow, Director
Project Directorate II-2
Division of Reactor Projects-I/II
Office of Nuclear Reactor Regulation

Attachment:
Changes to the Technical
Specifications

Date of Issuance: September 26, 1988

ATTACHMENT TO LICENSE AMENDMENT NO.108

FACILITY OPERATING LICENSE NO. DPR-72

DOCKET NO. 50-302

Replace the following page of the Appendix "A" Technical Specifications with the attached page. The revised page is identified by amendment number and contains a vertical line indicating the area of change. The corresponding overleaf page is also provided to maintain document completeness.

Remove

3/4 4-32

Insert

3/4 4-32

REACTOR COOLANT SYSTEM

3/4.4.10 STRUCTURAL INTEGRITY

ASME CODE CLASS 1, 2 and 3 COMPONENTS

LIMITING CONDITION FOR OPERATION

3.4.10 The structural integrity of ASME Code Class 1, 2 and 3 components shall be maintained in accordance with Specification 4.4.10.

APPLICABILITY: All MODES.

ACTION:

- a. With the structural integrity of any ASME Code Class 1 component(s) not conforming to the above requirements, restore the structural integrity of the affected component(s) to within its limit or isolate the affected component(s) prior to increasing the Reactor Coolant System temperature more than 50°F above the minimum temperature required by NDT considerations.
- b. With the structural integrity of any ASME Code Class 2 component(s) not conforming to the above requirements, restore the structural integrity of the affected component(s) to within its limit or isolate the affected component(s) prior to increasing the Reactor Coolant System temperature above 200°F.
- c. With the structural integrity of any ASME Code Class 3 component(s) not conforming to the above requirements, restore the structural integrity of the component(s) to within its limit or isolate the affected component(s) from service.
- d. The provisions of Specification 3.0.4 are not applicable.

SURVEILLANCE REQUIREMENTS

4.4.10 In addition to the requirements of Specification 4.0.5:

- a. The reactor coolant pump flywheels shall be inspected per the recommendations of Regulatory Position C.4.b. of Regulatory Guide 1.14, Revision 1, August 1975.

REACTOR COOLANT SYSTEM

SURVEILLANCE REQUIREMENTS (Continued)

- k. Each internal vent valve shall be demonstrated OPERABLE at least once per 24 months during shutdown, by:
1. Verifying through visual inspection that the valve body and valve disc exhibit no abnormal degradation,
 2. Verifying the valve is not stuck in an open position, and
 3. Verifying through manual actuation that the valve is fully open with a force of ≤ 425 lbs (applied vertically upward).