


ROLL N 18

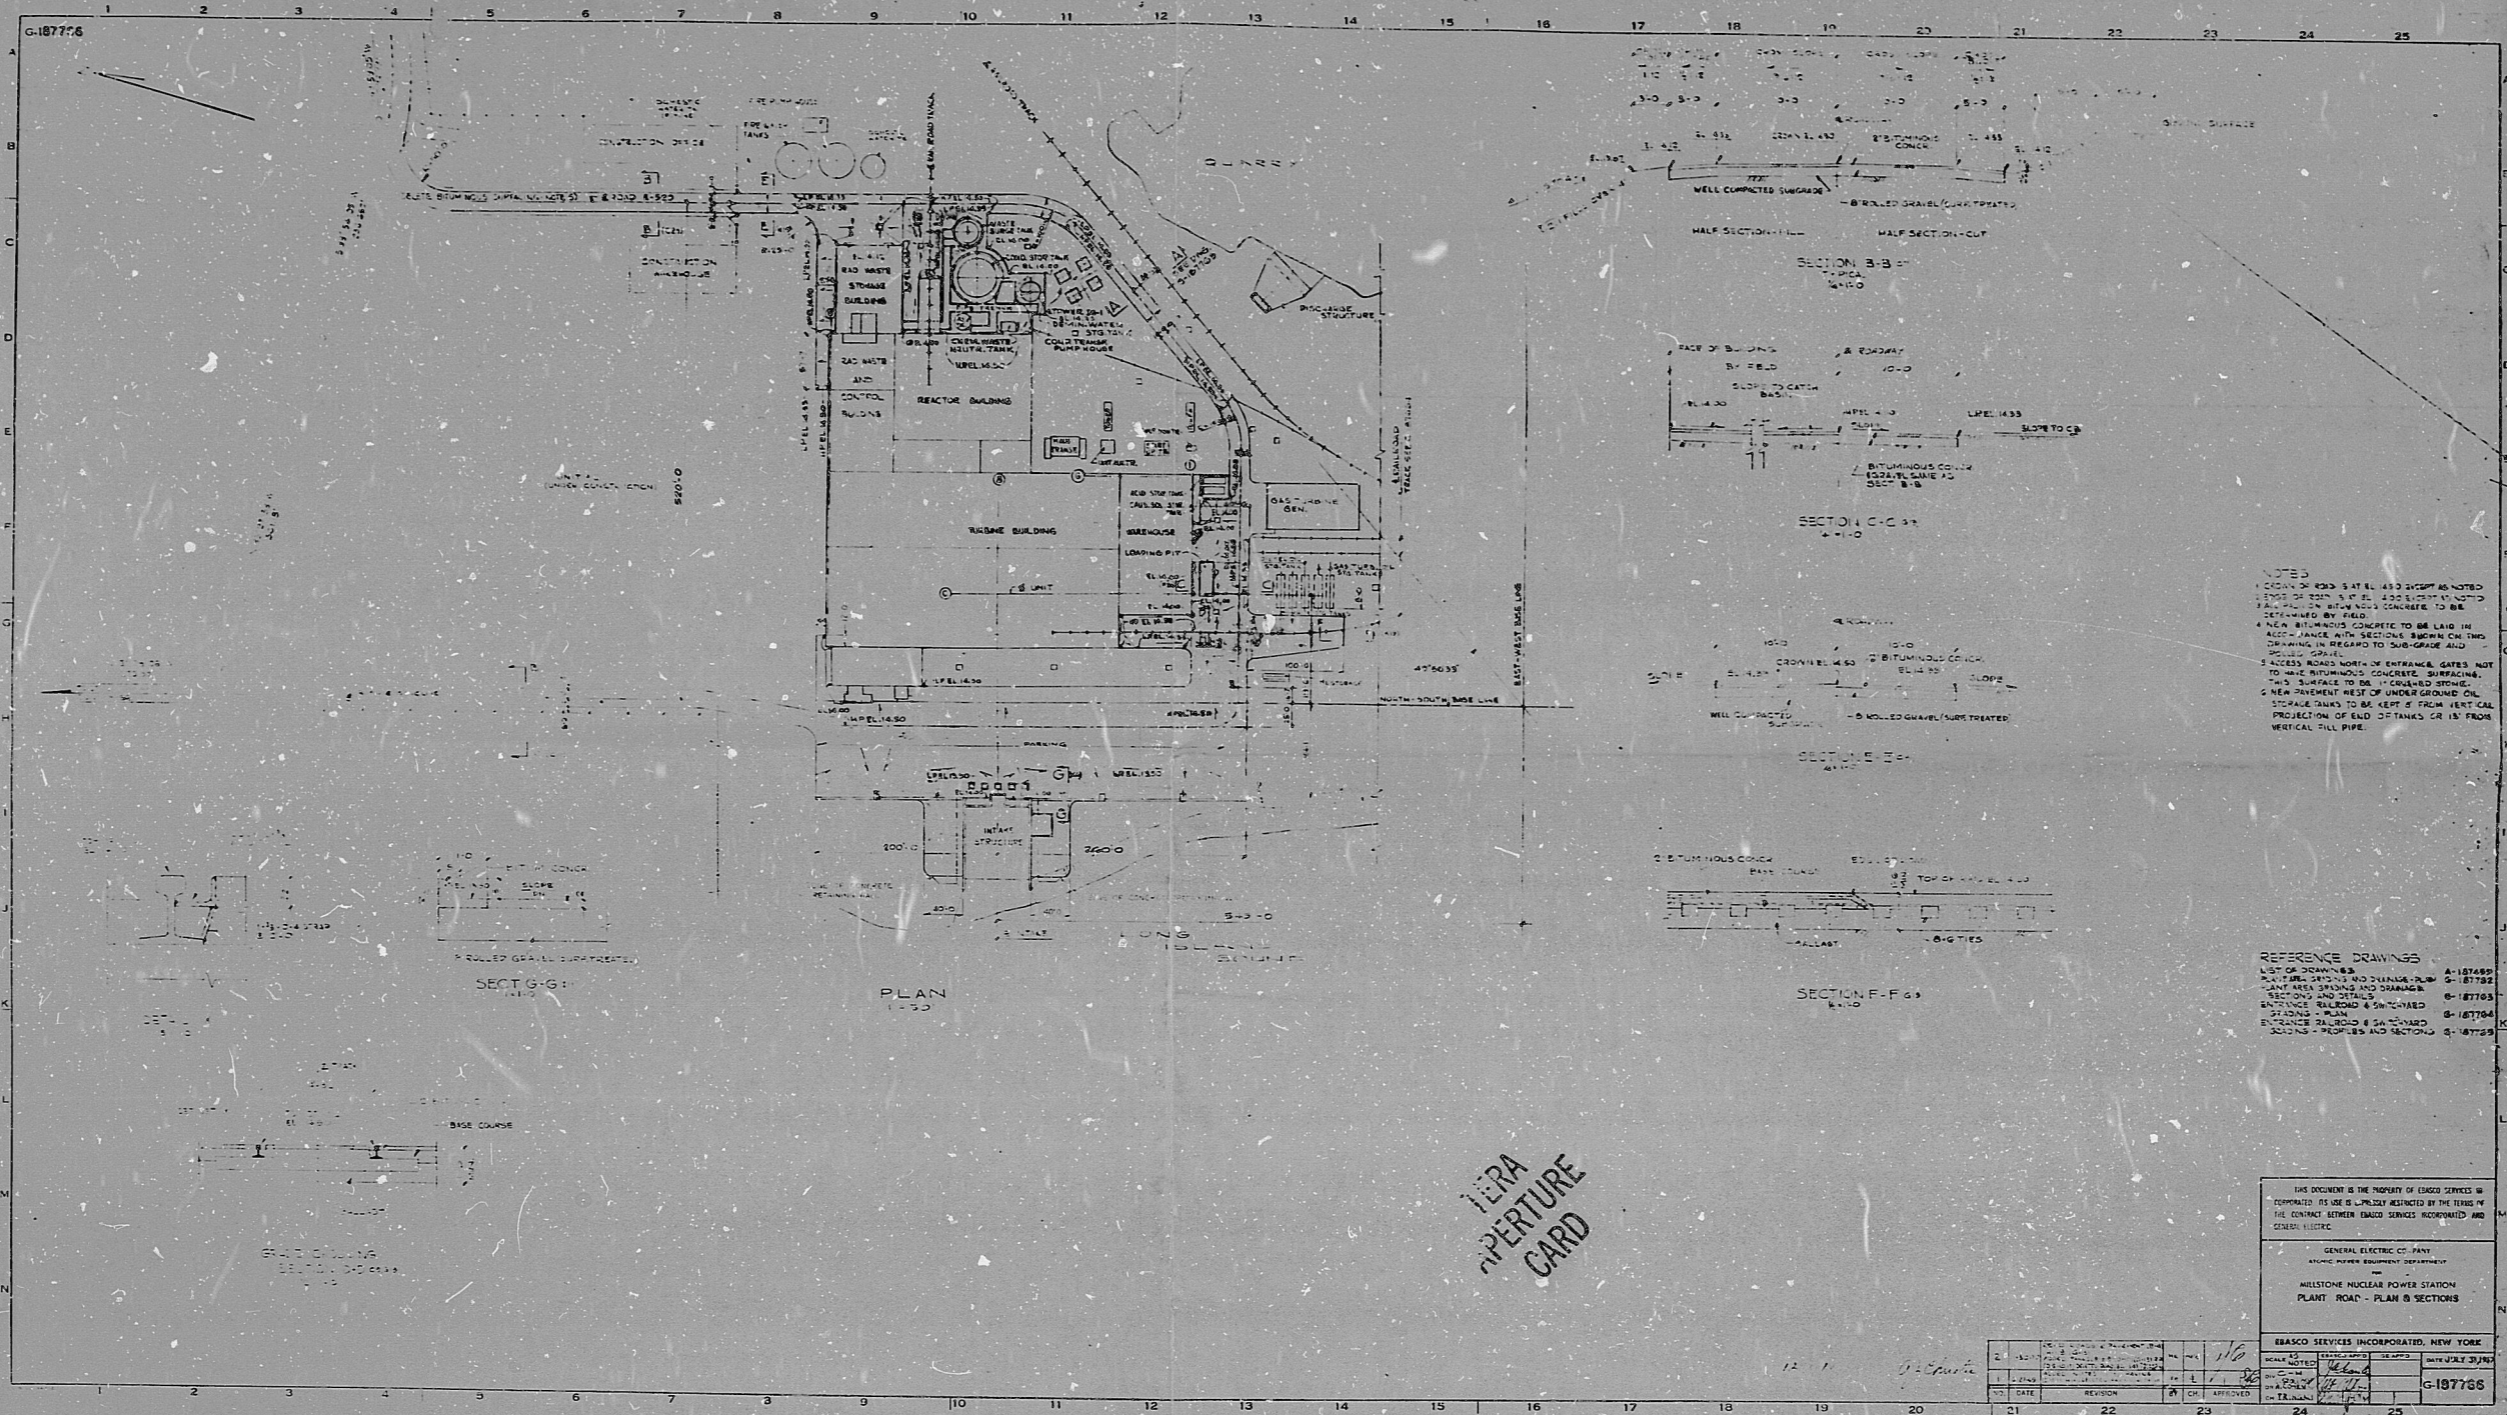

- NOTES
1. ELEVATIONS SHOWN ARE AS NOTED UNLESS OTHERWISE INDICATED.
 2. ALL CONCRETE SHALL BE 4000 PSI STRENGTH.
 3. ALL CONCRETE SHALL BE PLACED AND FINISHED BY THE CONTRACTOR.
 4. ALL CONCRETE SHALL BE CURED AND PROTECTED AS REQUIRED.
 5. ALL CONCRETE SHALL BE FINISHED WITH A BROOM FINISH UNLESS OTHERWISE INDICATED.
 6. ALL CONCRETE SHALL BE FINISHED WITH A BROOM FINISH UNLESS OTHERWISE INDICATED.
 7. ALL CONCRETE SHALL BE FINISHED WITH A BROOM FINISH UNLESS OTHERWISE INDICATED.
 8. ALL CONCRETE SHALL BE FINISHED WITH A BROOM FINISH UNLESS OTHERWISE INDICATED.
 9. ALL CONCRETE SHALL BE FINISHED WITH A BROOM FINISH UNLESS OTHERWISE INDICATED.
 10. ALL CONCRETE SHALL BE FINISHED WITH A BROOM FINISH UNLESS OTHERWISE INDICATED.

THIS DRAWING IS THE PROPERTY OF EDGECOR SERVICES INC. IT IS TO BE USED ONLY FOR THE PROJECT AND SITE SPECIFICALLY IDENTIFIED IN THE CONTRACT BETWEEN EDGECOR SERVICES INCORPORATED AND THE CLIENT.

GENERAL ELECTRIC COMPANY
NUCLEAR POWER EQUIPMENT DEPARTMENT
MILLSTONE NUCLEAR POWER STATION
PLANT ROAD - PLAN & SECTIONS

NO.	DATE	REVISION	BY	CHKD.	APP'D.	SCALE	DESCRIPTION
1	11/11/78						ISSUED FOR CONSTRUCTION
2	11/11/78						ISSUED FOR CONSTRUCTION
3	11/11/78						ISSUED FOR CONSTRUCTION
4	11/11/78						ISSUED FOR CONSTRUCTION
5	11/11/78						ISSUED FOR CONSTRUCTION

6108250642

POOR ORIGINAL

8.5"
11"
17"

8.5"
11"
17"

RIDS

8108250642

