

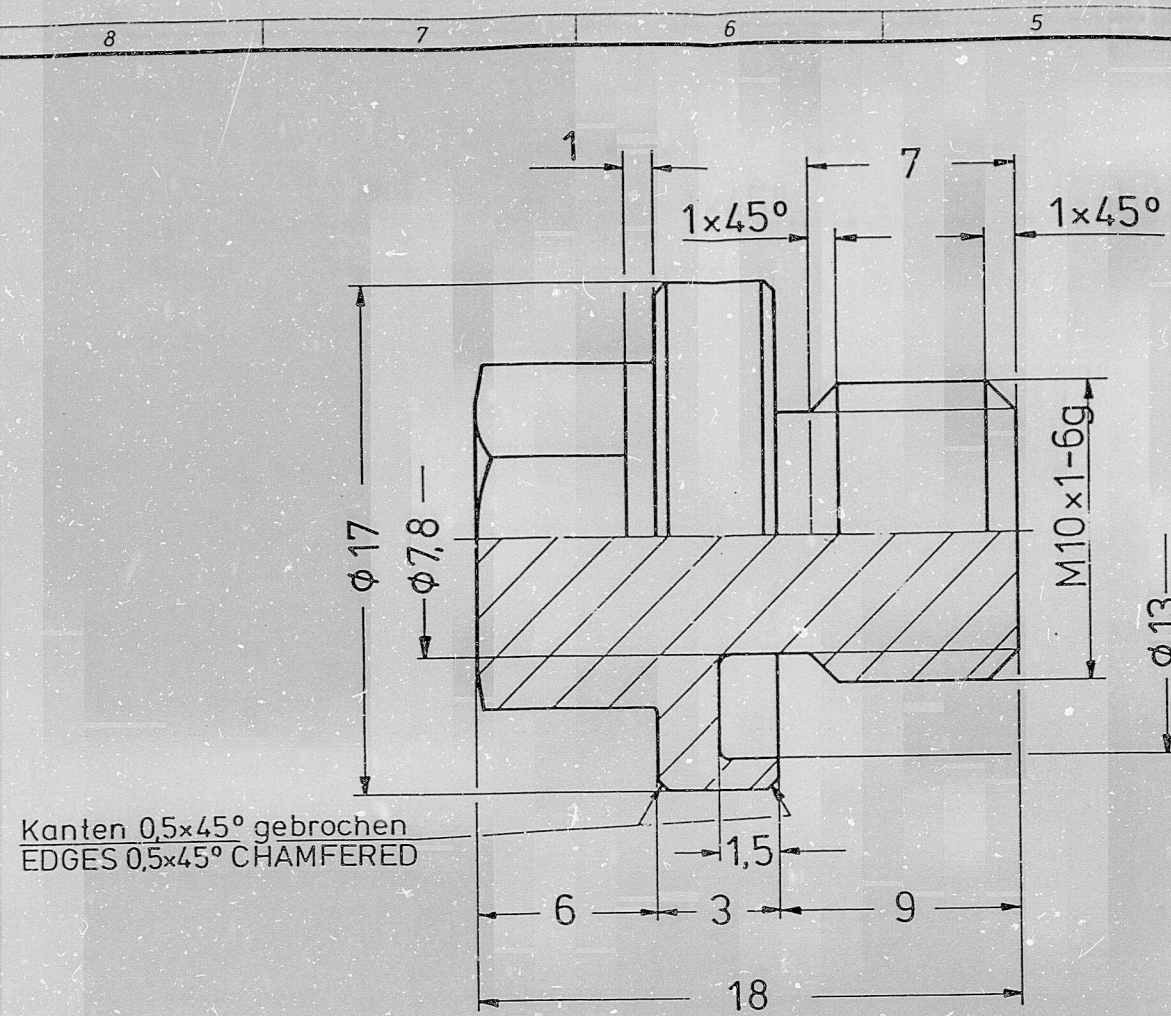


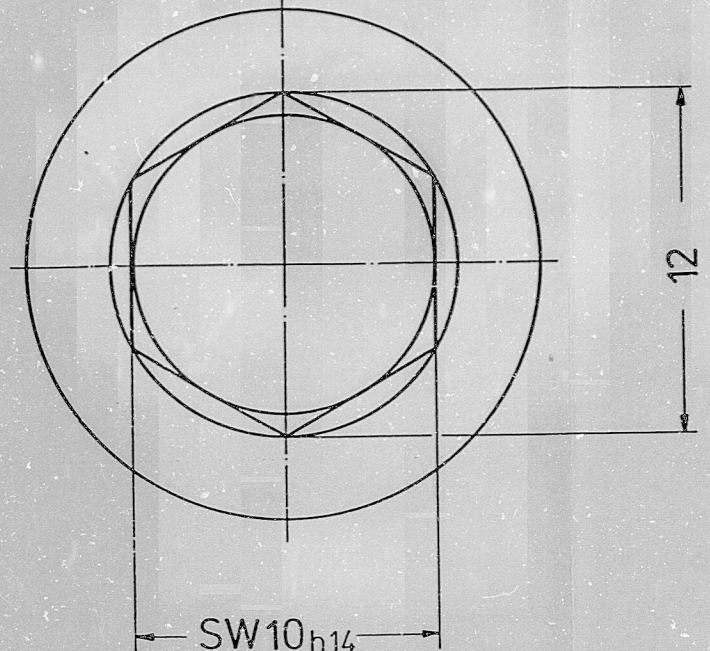

Kanten 0,5x45° gebrochen
EDGES 0,5x45° CHAMFERED

M 1:1



APERTURE
CARD

Paßmaß	Abmaß
SW10 _{h14}	0 -0,360

Genehmigungs-Unterlage
GNS-TIG
Zul.-Rev. 4, Nr. 30

RELEASED FOR EXECUTION FREIGEgeben ZUR FERTIGUNG		SURFACE-SYMBOL ISO 1302 RAUHEITS-SYMBOL IN μm	
DATE: DATUM:		PLACE: ORT:	
NAME:		NAME:	
COPYING OF THIS DOCUMENT AND GIVING IT TO OTHERS AND THE USE OR COMMUNICATION OF THE CONTENTS THEREOF ARE FORBIDDEN WITHOUT EXPRESS AUTHORITY. OFFENDERS ARE LIABLE OF THE PAYMENT OF DAMAGES. ALL RIGHTS ARE RESERVED IN THE EVENT OF THE GRANT OF A PATENT OR THE REGISTRATION OF A UTILITY MODEL OR DESIGN.		DIMENSIONS WITHOUT INDICATION OF TOLERANCES DIN 7168m-S TOLERANZ- DIN 2300	
WEITERGABE/SOWIE Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhaltes nicht gestattet. SCHUTZVERMERK NACH DIN 34 BEACHTEN.		HASSE OHNE TOLERANZANGABE DIN 7168m-S TOLERANZ- DIN 2300	
SCALE MASSSTAB 5:1, 1:1		MATERIAL WERKSTOFF A2, A4	
WEIGHT GEW. 0,01 kg		Verschlußschraube SCREW PLUG CASTOR u. MOSAIK	
D 500.14-26			

GNS

Datum
Bearb. 6.9.85
Gepr. " " " "

AM-NR DATUM NAME GEPR

990⁷90122

PDR RIDS

