


HIGH VELOCITY LUBE OIL FLUSHING SYSTEM

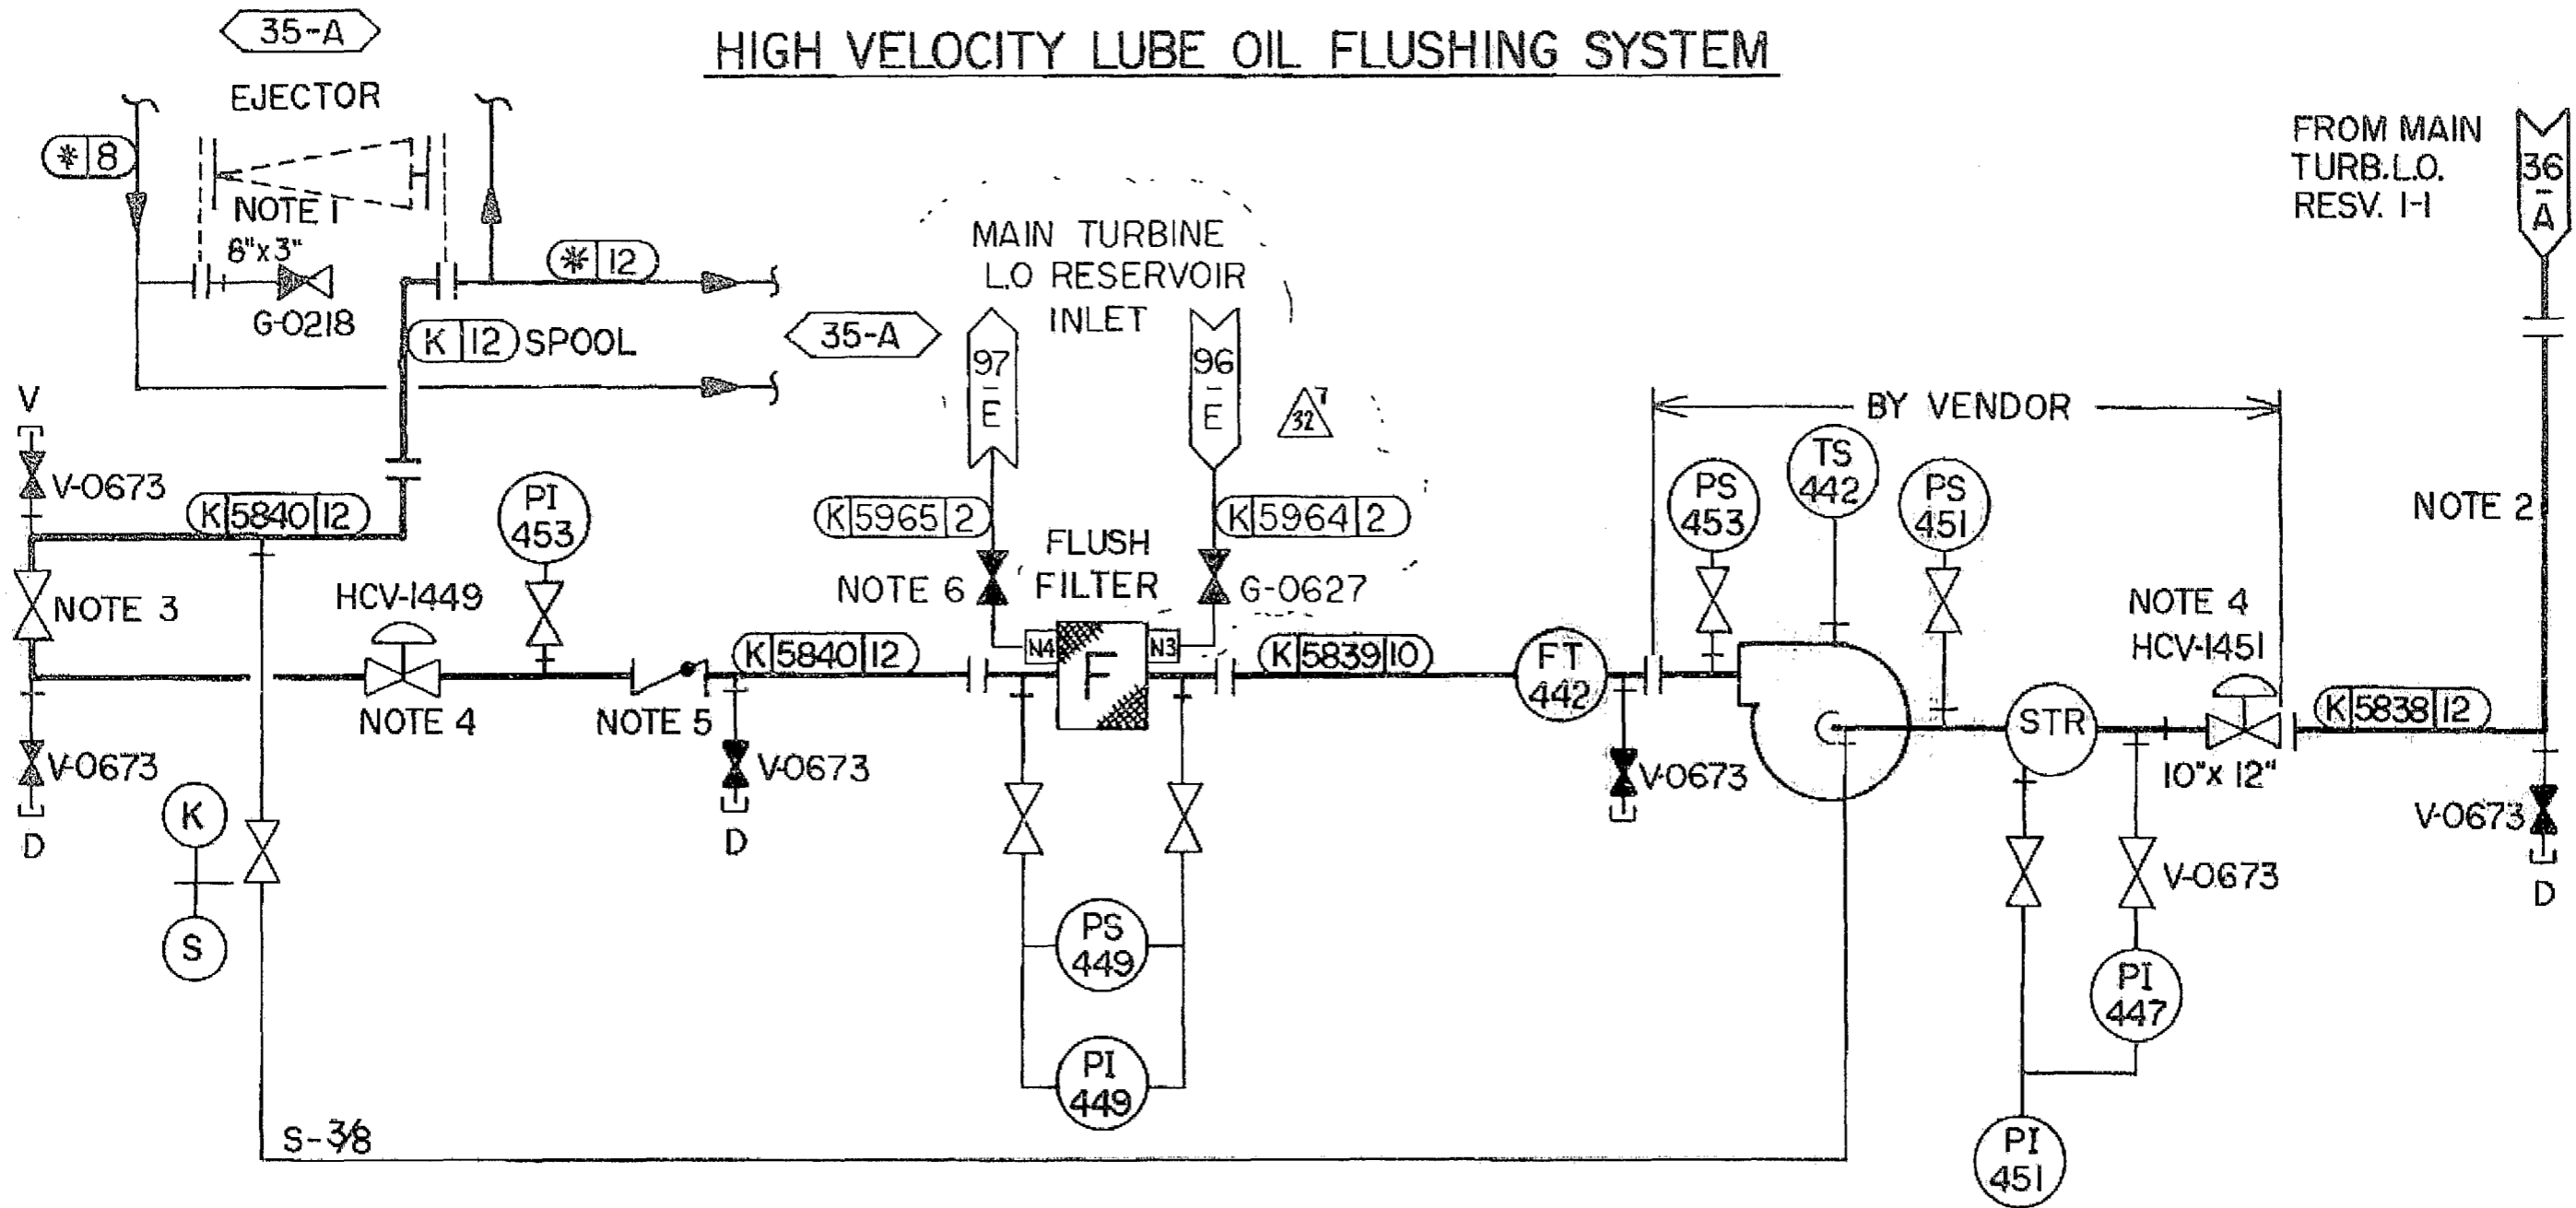

NOTES:

1. FOR FLUSHING TEMPORARILY REMOVE EJECTOR AND INSTALL SPOOL PIECES. (31B-A)
2. THIS SPOOL PIECE IS REMOVED AND BLANK FLANGED WHEN FLUSHING SYSTEM NOT IN USE. (39B-B)
3. 12" Ø 150# GLOBE VALVE - WALWORTH MODEL 5275F (30B-B)
4. 12" Ø 200# NORRIS BUTTERFLY (31B-C, 38B-C)
5. TECHNOCHECK STYLE 5355, 150# (32B-C)
6. 1-1/2" Ø WHITEY, STEEL BODY, 2160 PSI, TYT BALL VALVE. (33B-B)

UNIT-1



PG & E CO.	102020	REV. 32
SHEET 3B OF SHEETS		
	MICROFILM	32