

1717 Wakonade Drive Welch, MN 55089

May 10, 2022

L-PI-22-023 TS 5.6.2 ISFSI TS 5.2

ATTN: Document Control Desk U.S. Nuclear Regulatory Commission Washington, DC 20555-0001

Prairie Island Nuclear Generating Plant Units 1 and 2 Docket Nos. 50-282 and 50-306 Renewed Facility Operating License DPR-42 and DPR-60

Prairie Island Independent Spent Fuel Storage Installation Docket No. 72-10 Renewed Materials License No. SNM-2506

2021 Annual Radiological Environmental Monitoring Program Report

Northern States Power Company, a Minnesota corporation, doing business as Xcel Energy (hereafter "NSPM", submits one copy of the Annual Radiological Environmental Program Report for the period January 1, 2021 through December 31, 2021, as Enclosure 1.

Summary of Commitments

This letter makes no new commitments and no revisions to existing commitments.

Harlan D. Hanson Jr.

Plant Manager, Prairie Island Nuclear Generating Plant

Northern States Power Company - Minnesota

Enclosure

cc: Regional Administrator, USNRC, Region III

Project Manager, Prairie Island Nuclear Generating Plant, USNRC, NRR

NRC Resident Inspector, Prairie Island Nuclear Generating Plant

Director of NMSS, USNRC

Department of Health, State of Minnesota

PI Dakota Community Environmental Coordinator

ENCLOSURE 1

ANNUAL REPORT TO THE UNITED STATES NUCLEAR REGULATORY COMMISSION

Radiological Environmental Monitoring Program

January 1 to December 31, 2021



XCEL ENERGY CORPORATION PRAIRIE ISLAND NUCLEAR GENERATING PLANT

ANNUAL REPORT to the UNITED STATES NUCLEAR REGULATORY COMMISSION

Radiological Environmental Monitoring Program

January 1 to December 31, 2021

Docket No. 50-282 Renewed Operating License No. DPR-42 Docket No. 50-306 Renewed Operating License No. DPR-60

ISFSI Docket No. 72-10

Renewed License No. SNM-2506

Prepared under Contract by

ATI ENVIRONMENTAL, Inc. MIDWEST LABORATORY

Project No. 8010

Approved:

Ashok Banavali, Ph.D. Laboratory Manager

PREFACE

The staff of Environmental, Inc., Midwest Laboratory was responsible for the acquisition of data presented in this report. Samples were collected by members of the staff of the Prairie Island Nuclear Generating Plant, operated by Northern States Power Co. – Minnesota, for XCEL Energy Corporation. The report was prepared by Environmental, Inc., Midwest Laboratory.

TABLE OF CONTENTS

Section		<u>Page</u>						
	Preface	ii						
	List of Tables	iv						
	List of Figures							
1.0	INTRODUCTION	1						
2.0	SUMMARY	2						
3.0	RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM (REMP)	3						
	3.1 Program Design and Data Interpretation 3.2 Program Description 3.3 Program Execution 3.4 Laboratory Procedures 3.5 Program Modifications 3.6 Land Use Census							
4.0	RESULTS AND DISCUSSION	7						
	4.1 Atmospheric Nuclear Detonations and Nuclear Accidents	7						
	4.2 Summary of Preoperational Data	7						
	4.3 Program Findings	8						
5.0	FIGURES AND TABLES	12						
6.0	REFERENCES CITED	24						
APPEN	<u>IDICES</u>							
Α	Interlaboratory Comparison Program Results	A-1						
	Attachment A, Acceptance Criteria for "Spiked" Samples	A-2						
В	Data Reporting Conventions.	B-1						
С	Annual Average Effluent Concentration Limits of Radioactivity in Air and Water Above Background in Unrestricted Areas	C-1						
D	Sampling Location Maps	D-1						
Е	Special Well and Surface Water Samples	E-1						

LIST OF TABLES

<u>No</u> .	<u>Title</u> <u>Pa</u> ç	је
5.1	Sample Collection and Analysis Program1	5
5.2	Sampling Locations	6
5.3	Missed Collections and Analyses	9
5.4	Radiological Environmental Monitoring Program Summary20	0
In ad	dition, the following tables can be found in the Appendices:	
Appe	endix A	
A-1	Environmental Resources Associates, Crosscheck Program Results	3
A-2	Program Results; (TLDs)	4
A-3	In-house "Spiked" Samples	6
A-4	In-house "Blank" Samples	8
A-5	In-house "Duplicate" Samples	0
A-6	Department of Energy MAPEP comparison results	4
A-7	Environmental Resources Associates, Crosscheck Program Results (EML study replacement)A-1	6
Appe	endix C	
C-1	Average Annual Effluent Concentration Limits of Radioactivity in Air and Water Above Natural Background in Unrestricted Areas	1
Appe	endix E	
E-4.1	1 Sample collection and analysis programE-5	5
E-4.2	2 Sampling locationsE-6	;
E-4.3	3 REMP SummaryE-8	}
E-4.4	4 REMP Complete Data Tables E-9)
E-4.5	5 Supplementary Data Tables E-14	

LIST OF FIGURES

<u>No</u> .		<u>Title</u>	<u>Page</u>
5.1	Offsite Ambient Radiation (TLDs), average of inn locations versus control	er and outer ring indicator	13
5.2	Airborne Particulates; analysis for gross beta, av locations (P-2,3,4,6,7) versus control location (F	erage mean of all indicator 2-1)	14
		<u>MAPS</u>	
App	pendix D	Title	Page
	TLD locations, Controls		.D-3 .D-3 .D-4
Арр	pendix E		
	Groundwater Monitoring Well locations		. E-15

1.0 INTRODUCTION

This report summarizes and interprets results of the Radiological Environmental Monitoring Program (REMP) conducted by Environmental, Inc., Midwest Laboratory at the Prairie Island Nuclear Generating Plant, Red Wing, Minnesota, during the period January - December, 2021.

This program monitors the levels of radioactivity in the air, terrestrial, and aquatic environments in order to assess the impact of the plant on its surroundings.

Tabulations of the individual analyses made during the year are not included in this report. These data are included in a reference document (Environmental, Inc., Midwest Laboratory, 2021b) available at Prairie Island Nuclear Generating Plant.

Prairie Island Nuclear Generating Plant is located on the Mississippi River in Goodhue County, Minnesota, owned by Xcel Energy Corporation and operated by Northern States Power Co.- Minnesota. The plant has two 575 MWe pressurized water reactors. Unit 1 achieved initial criticality on 1 December 1973. Commercial operation at full power began on 16 December 1973. Unit 2 achieved initial criticality on 17 December 1974. Commercial operation at full power began on 21 December 1974.

2.0 SUMMARY

The Radiological Environmental Monitoring Program (REMP) required by the U.S. Nuclear Regulatory Commission (NRC) Offsite Dose Calculation Manual for the Prairie Island Nuclear Generating Plant and the Independent Spent Fuel Storage Installation (ISFSI) is described. Results for 2021 are summarized and discussed.

Program findings show background levels of radioactivity in the environmental samples collected in the vicinity of the Prairie Island Nuclear Generating Plant.

3.0 RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM (REMP)

3.1 Program Design and Data Interpretation

The purpose of the Radiological Environmental Monitoring Program (REMP) at the Prairie Island Nuclear Generating Plant is to assess the impact of the plant on its environment. For this purpose, samples are collected from the air, terrestrial, and aquatic environments and analyzed for radioactive content. In addition, ambient gamma radiation levels are monitored by thermoluminescent dosimeters (TLDs).

Sources of environmental radiation include the following:

- (1) Natural background radiation arising from cosmic rays and primordial radionuclides;
- (2) Fallout from atmospheric nuclear detonations;
- Releases from nuclear power plants;
- (4) Industrial and medical radioactive waste; and
- (5) Fallout from nuclear accidents.

In interpreting the data, effects due to the plant must be distinguished from those due to other sources.

A major interpretive aid in assessment of these effects is the design of the monitoring program at the Prairie Island Plant which is based on the indicator-control concept. Most types of samples are collected both at indicator locations (nearby, downwind, or downstream) and at control locations (distant, upwind, or upstream). A plant effect would be indicated if the radiation level at an indicator location was significantly larger than that at the control location. The difference would have to be greater than could be accounted for by typical fluctuations in radiation levels arising from other sources.

An additional interpretive technique involves analyses for specific radionuclides present in the environmental samples collected from the plant site. The plant's monitoring program includes analyses for tritium and iodine-131. Most samples are analyzed for gamma-emitting isotopes with results for the following groups quantified: zirconium-95, cesium-137, cerium-144, beryllium- 7, and potassium-40. The first three gamma-emitting isotopes were selected as radiological impact indicators because of the different characteristic proportions in which they appear in the fission product mix produced by a nuclear reactor and that produced by a nuclear detonation. Each of the three isotopes is produced in roughly equivalent amounts by a reactor: each constitutes about 10% of the total activity of fission products 10 days after reactor shutdown. Alternatively, 10 days after a nuclear explosion, the contributions of zirconium-95, cerium-144, and cesium-137 to the activity of the resulting debris are in the approximate ratio 4:1:0.03 (Eisenbud, 1963). Beryllium-7 is of cosmogenic origin and potassium-40 is a naturally-occurring isotope. They were chosen as calibration monitors and should not be considered radiological impact indicators.

The other group quantified consists of niobium-95, ruthenium-103 and -106, cesium-134, barium-lanthanum-140, and cerium-141. These isotopes are released in small quantities by nuclear power plants, but to date their major source of injection into the general environment has been atmospheric nuclear testing. Nuclides of the final group, manganese-54, iron-59, cobalt-58 and - 60, and zinc-65, are activation products and arise from activation of corrosion products. They are typical components of a nuclear power plant's effluents, but are not produced in significant quantities by nuclear detonations.

3.1 Program Design and Data Interpretation (continued)

Other means of distinguishing sources of environmental radiation are employed in interpreting the data. Current radiation levels are compared with previous levels, including those measured before the plant became operational. Results of the plant's monitoring program can be related to those obtained in other parts of the world. Finally, results can be related to events known to cause elevated levels of radiation in the environment, e.g., atmospheric nuclear detonations.

3.2 Program Description

The sampling and analysis schedule for the radiological environmental monitoring program at Prairie Island is summarized in Table 5.1 and briefly reviewed below. Table 5.2 defines the sampling location codes used in Table 5.1 and specifies for each location its type (indicator or control) and its distance, direction, and sector relative to the reactor site or ISFSI facility, as appropriate. To assure that sampling is carried out in a reproducible manner, detailed sampling procedures have been prescribed (Prairie Island Nuclear Generating Plant, 2021). Maps of fixed sampling locations are included in Appendix D.

To monitor the airborne environment, air is sampled by continuous pumping at six stations, four site boundary indicators (P-2, P-3, P-4 and P-7), located in the highest calculated D/Q sectors, one community indicator (P-6), and one control (P-1). The particulates are collected on membrane filters; airborne iodine is trapped by activated charcoal canisters. Particulate filters are analyzed for gross beta activity and charcoal canisters for iodine-131. Quarterly composites of particulate filters from each location are analyzed for gamma-emitting isotopes.

Offsite ambient gamma radiation is monitored at thirty-four locations, using CaSO₄:Dy dosimeters with four sensitive areas at each location: ten in an inner ring in the general area of the site boundary, fifteen in the outer ring within a 4-5 mile radius, eight at special interest locations, and one control location, 11.1 miles distant from the plant. They are replaced and measured quarterly.

Ambient gamma radiation is monitored at the Independent Spent Fuel Storage Installation (ISFSI) Facility by twenty CaSO₄:Dy dosimeters. Twelve dosimeters are located inside of the earthen berm in direct line of sight from the storage casks and eight dosimeters are located outside of the earthen berm. They are replaced and measured quarterly.

To monitor the terrestrial environment, green leafy vegetables (cabbage) are collected annually from the highest D/Q garden and a control location (P-38), and analyzed for gamma-emitting isotopes, including iodine-131. Corn is collected annually only if fields are irrigated with river water and analyzed for gamma-emitting isotopes. Well water and ground water are collected quarterly from five locations near the plant and analyzed for tritium and gamma-emitting isotopes.

River water is collected weekly at two locations, one upstream of the plant (P-5) and one downstream (P-6, Lock and Dam No.3). Monthly composites are analyzed for gamma-emitting isotopes. Quarterly composites are analyzed for tritium.

Drinking water is collected weekly from the City of Red Wing well. Monthly composites are analyzed for gross beta, iodine-131, and gamma-emitting isotopes. Quarterly composites are analyzed for tritium.

3.2 <u>Program Description (continued)</u>

The aquatic environment is also monitored by semi-annual upstream and downstream collections of fish, periphyton or invertebrates, and bottom sediments. Shoreline sediment is collected semi-annually from one location. All samples are analyzed for gamma-emitting isotopes.

3.3 Program Execution

The Program was executed as described in the preceding section in 2021 without exception.

3.4 <u>Laboratory Procedures</u>

The iodine-131 analyses in drinking water were made using a sensitive radiochemical procedure which involves separation of the iodine using an ion-exchange method, solvent extraction and subsequent beta counting.

Gamma-spectroscopic analyses were performed using high-purity germanium (HPGe) detectors. Levels of iodine-131 in cabbage and natural vegetation and concentrations of airborne iodine-131 in charcoal samples were determined by gamma spectroscopy.

Tritium concentrations were determined by liquid scintillation.

Analytical Procedures used by Environmental, Inc. are on file and are available for inspection. Procedures are based on those prescribed by the Health and Safety Laboratory of the U.S. Department of Energy, Edition 28, 1997, U.S. Environmental Protection Agency for Measurement of Radioactivity in Drinking Water, 1980, and the U.S. Environmental Protection Agency, EERF, Radiochemical Procedures Manual, 1984.

Environmental, Inc., Midwest Laboratory has a comprehensive quality control/quality assurance program designed to assure the reliability of data obtained. Details of the QA Program are presented elsewhere (Environmental, Inc., Midwest Laboratory, 2018). The QA Program includes participation in Interlaboratory Comparison (crosscheck) Programs. Results obtained in the crosscheck programs are presented in Appendix A.

3.5 Program Modifications

None.

3.6 Land Use Census

In accordance with the Prairie Island Nuclear Generating Plant Offsite Dose Calculation Manual, H4, (ODCM) a land use census is conducted in order to identify the location of the nearest residence, nearest milk animals, and the nearest garden of greater than 500 ft² producing fresh leafy vegetables in each of the 16 meteorological sectors within a distance of 5 miles. This census is conducted at least once per 12 months between the dates of May 1 and September 30. If new locations yield a calculated dose or dose equivalent (via the same exposure pathway) twenty percent greater than the required locations per the ODCM, then the new locations are added to the radiological environmental monitoring program within 30 days, and sampling locations having lower calculated doses or a lower dose commitment may be deleted from this monitoring program after September of the year in which the land use census was conducted.

This land use census insures the updating of the radiological environmental monitoring program should sampling locations change within the 5 mile radius from the plant.

The Land Use Census was conducted during August 2021. The ranking of the highest D/Q garden remained the same for 2021 as 2020, Suter (SSE at 0.6 miles). There are no dairy farms within a 5 mile radius of the plant therefore no samples were collected. The highest ranking D/Q residence remained the same for 2021 as for 2020, Sellers (WNW at 0.7 miles).

The Minnesota and Wisconsin Departments of Natural Resources were both consulted and both confirmed that no irrigation permits had been issued the past year for crop fields within the file mile Mississippi River area downstream of the Prairie Island Plant. Therefore, no crop sampling was performed.

There were no land use changes within five miles of the plant resulting in new special interest areas such as: new population centers, new residences, new schools or recreation centers.

No milk animals were identified within five miles of the plant therefore no samples were collected. The last dairy within the five mile radius suspended operations in 2016.

4.0 RESULTS AND DISCUSSION

All scheduled collections and analyses were made in 2021 without exception.

The results are summarized in Table 5.4 in a format recommended by the Nuclear Regulatory Commission in Regulatory Guide 4.8. For each type of analysis of each sampled medium, this table lists the mean and range for all indicator locations and for all control locations. The locations with the highest mean and range are also shown.

4.1 Atmospheric Nuclear Detonations and Nuclear Accidents

There were no reported accidents involving significant release to the environment at nuclear reactor facilities in 2021. The Fukushima Daiichi nuclear accident occurred March 11, 2011.

There were no reported atmospheric nuclear tests in 2021. The last reported test was conducted on October 16, 1980 by the People's Republic of China.

4.2 Summary of Preoperational Data

The following constitutes a summary of preoperational studies conducted at the Prairie Island Nuclear Power Plant during the years 1970 to 1973, to determine background levels expected in the environment, and provided, where applicable, as a means for comparison with present day levels. Strict comparisons, however, are difficult, since background levels of radiation were much higher in these years due to radioactive fallout from the atmosphere. Gross beta measurements in fallout declined yearly from a level of 12,167 pCi/ m³ to 1,020 pCi/m³, and these declining values are reflected throughout the various media tested.

In the air environment, ambient gamma radiation (TLDs) averaged 9.4 mR/4 weeks during preoperational studies. Gross beta in air particulates declined from levels of 0.38 to 0.037 pCi/m³. Average present day levels have stabilized at around 0.025 pCi/m³. Airborne radioiodine remained below detection levels.

In the terrestrial environment of 1970 to 1973, milk, agricultural crops, and soil were monitored. In milk samples, low levels of Cs-137, I-131, and Sr-90 were detected. Cs-137 levels declined from 16.5 to 8.6 pCi/L. Present day measurements for both Cs-137 and I-131 are below detection levels. Agricultural crop measurements averaged 57.7 pCi/g for gross beta and 0.47 pCi/g for Cs-137. Gross beta measured in soil averaged 52 pCi/g.

The aqueous environment was monitored by testing of river, well and lake waters, bottom sediments, fish, aquatic vegetation and periphyton. Specific location comparison of drinking, river and well water concentrations for tritium and gross beta are not possible. However, tritium background levels, measured at eight separate locations, declined steadily from an average concentration of 1020 pCi/L to 490 pCi/L. Present day environmental levels of tritium measure below a detection limit of approximately 160 pCi/L. Values for gross beta, measured from 1970 to 1973, averaged 9.9 pCi/L in downstream Mississippi River water, 8.2 pCi/L for well water, and11.0 pCi/L for lake water. Gamma emitters were below the lower limit of detection (LLD). In bottom sediments, gross beta background levels were determined at 51.0 pCi/g. Cs-137 activity during preoperational studies in 1973 measured 0.25 pCi/g upstream and 0.21 pCi/g downstream. The lower levels occasionally observed today can still be attributed to residual activity from atmospheric fallout. Gross beta in fish, measured in both flesh and skeletal samples, averaged 7.3 and 11.7 pCi/g, respectively. Gross beta background levels in aquatic vegetation, algae and periphyton samples measured 76.0 pCi/q, 46.0 pCi/g, and 13.6 pCi/q, respectively.

4.3 Program Findings

Results obtained show background levels of radioactivity in the environmental samples collected in the vicinity of the Prairie Island Nuclear Generating Plant.

Ambient Radiation (TLDs)

Ambient radiation was measured in the general area of the site boundary, at the outer ring 4 - 5 mi. distant from the Plant, at special interest areas and at one control location. The means ranged from 16.1 mR/91 days at inner ring locations to 16.6 mR/91 days at outer ring locations. The mean at special interest locations was 15.7 mR/91 days and 15.9 mR/91 days at the control location. Dose rates measured at the inner and outer ring and the control locations were comparable to 2020 dose rates and consistent with results from previous years. The results are tabulated below. No plant effect on ambient gamma radiation measurements was indicated (Figure 5-1).

Year	Average (Inner and Outer Rings)	Control	Year	Average (Inner and Outer Rings)	Control
2001	16.8	17.2	2012	16.5	16.5
2002	17.4	16.9	2013	15.1	16.0
2003	16.2	16.0	2014	15.3	16.2
2004	17.6	17.6	2015	16.0	17.4
2005	16.8	16.3	2016	16.7	17.4
2006	16.6	16.6	2017	16.1	16.3
2007	17.5	17.7	2018	16.6	17.4
2008	16.9	17.1	2019	15.8	15.3
2009	15.9	16.3	2020	15.4	14.2
2010	16.0	16.0	2021	16.4	15.9
2011	15.7	15.7			

Ambient gamma radiation as measured by thermoluminescent dosimetry.

Average quarterly dose rates (mR/91 days).

ISFSI Facility Operations Monitoring

Ambient radiation was measured inside the ISFSI earth berm, outside the ISFSI earth berm and at two special locations between the plant ISFSI and the Prairie Island Indian Community. The mean dose rates averaged 187.9 mR/91 days inside the ISFSI earth berm and 23.9 mR/91 days outside the ISFSI earth berm. No additional casks were placed on the ISFSI pad in 2021, a total of forty-seven loaded casks remain. The higher levels inside the earth berm are expected, due to the loaded spent fuel casks being in direct line-of-sight of the TLDs.

Ambient radiation levels measured outside the earth berm show a slight increase as compared to other offsite dose rates around the plant. The cumulative average of the two special Prairie Island Indian Community TLDs (Locations P-07S and P-08S) measured 15.4 and 14.5 mR/91 days. Although the skyshine neutron dose rates are not directly measured, the neutron levels measured next to the casks are below the levels predicted in the ISFSI SAR Report, Table 7A-4, "TN-40 Dose Rates at Short Distances". Therefore, the skyshine dose rates at farther distances from the casks should be at or below the calculated dose rates. No spent fuel storage effect on offsite ambient gamma radiation was indicated (Fig. 5-1).

Airborne Particulates

Typically, the highest averages for gross beta occur during the months of January and December, and the first and fourth quarters, as in 1999 through 2006, and also in 2008 through 2019. The elevated activity observed in 2007 was attributed to construction activity in the area, an increase in dust and consequent heavier particulate filter loading.

Average annual gross beta concentrations in airborne particulates were 0.030 pCi/m³ for indicator locations and 0.029 pCi/m³ for the control location and similar to levels observed from 1999 through 2006 and 2008 to 2020. The results are tabulated below.

Year	Average of Indicators	Control
	Concentra	tion (pCi/ m³)
2001	0.023	0.023
2002	0.028	0.023
2003	0.027	0.025
2004	0.025	0.026
2005	0.027	0.025
2006	0.026	0.025
2007	0.037	0.031
2008	0.028	0.027
2009	0.029	0.029
2010	0.025	0.025
2011	0.026	0.027
2012	0.031	0.032
2013	0.027	0.028
2014	0.026	0.026
2015	0.029	0.029
2016	0.027	0.027
2017	0.026	0.025
2018	0.027	0.027
2019	0.023	0.023
2020	0.027	0.025
2021	0.030	0.029

Average annual gross beta concentrations in airborne particulates.

Gamma spectroscopic analysis of quarterly composites of air particulate filters yielded similar results for indicator and control locations. Beryllium-7, which is produced continuously in the upper atmosphere by cosmic radiation (Arnold and Al-Salih, 1955), was detected in all samples,

with an average activity of 0.088 pCi/m³ for indicator locations and 0.086 pCi/m³ at the control location. All other isotopes were below the lower limit of detection.

There was no indication of a plant effect.

Airborne Iodine

Weekly levels of airborne iodine-131 were below the lower limit of detection (LLD) of 0.03 pCi/m³ in all samples. There was no indication of a plant effect.

Drinking Water

In drinking water from the City of Red Wing well, tritium activity measured below a detection limit of 160 pCi/L for all samples.

Gross beta concentrations averaged 9.2 pCi/L throughout the year, ranging from 7.1–11.7 pCi/L. These concentrations are consistent with the 2020 average of 8.6 pCi/L and with levels observed from 2000 through 2019. The most likely contribution is the relatively high levels of naturally-occurring radium. Gamma spectroscopy indicates the presence of lead and bismuth isotopes, which are daughters of the radium decay chain. There is no indication from the 2021 data of any effect of plant operation.

	1
Year	Gross Beta concentration (pCi/L)
2000	10.1
2001	8.3
2002	8.7
2003	9.9
2004	9.8
2005	11.5
2006	13.4
2007	11.6
2008	11.6
2009	11.4
2010	11.7
2011	12.4
2012	11.8
2013	12.2
2014	11.5
2015	11.4
2016	12.3
2017	10.1
2018	10.2
2019	9.7
2020	8.6
2021	9.2

Average annual gross beta concentrations in drinking water.

River Water

Analyses for H-3 in river water was below an LLD of 160 pCi/L for all eight quarterly composites from both the upstream and downstream locations for 2021. Gamma-emitting isotopes were below detection limits in all samples. In summary, the data for 2021 show no radiological effects from the plant operation.

Well Water

Water samples tested from the control well, P-43 (Peterson Farm) and from four indicator wells (P-8, Community Center, P-6, Lock and Dam No. 3, P-9, Plant Well No. 2 and P-24, Suter Farm) showed no tritium detected above a detection limit of 165 pCi/L. Gamma-emitting isotopes were below detection limits in all samples.

In summary, well water data for 2021 show no radiological effects of the plant operation.

Broadleaf Vegetation and Crops

Three samples of broadleaf vegetation, cabbage leaves, were collected in August 2021 and analyzed for gamma-emitting isotopes, including iodine-131. The I-131 level was below 0.016 pCi/g wet weight in all samples. With exceptions for naturally-occurring beryllium-7 and potassium-40, all other gamma-emitting isotopes were below their respective detection limits. There was no indication of a plant effect.

Field sampling personnel conducted an annual land use survey and found no river water taken for irrigation into fields within five miles downstream from the Prairie Island Plant. The collection and analysis of corn samples was not required since the fields have not been irrigated.

Fish

Fish were collected in May, September and October 2021 and analyzed for gamma-emitting isotopes. Only naturally-occurring potassium-40 was detected, and there was no significant difference between upstream and downstream results. There was no indication of a plant effect.

Aquatic Insects or Periphyton


Aquatic insects (invertebrates) or periphyton were collected in June and September, 2021 and analyzed for gamma-emitting isotopes. All gamma-emitting isotopes measured below detection limits with the exception of naturally occurring potassium-40 which was detected in all four samples. There was no indication of any plant effect.

Bottom and Shoreline Sediments

Upstream and downstream bottom sediments and downstream recreational area shoreline sediments were sampled in May, June and September, 2021. All gamma-emitting isotopes measured below detection limits with the exception of naturally occurring potassium-40 which was detected in all four bottom sediment samples and both shoreline sediment samples. There was no indication of any plant effect.

5.0 FIGURES AND TABLES

Figure 5.1 Offsite Ambient Radiation (TLDs); average of inner and outer ring indicator locations versus control location.

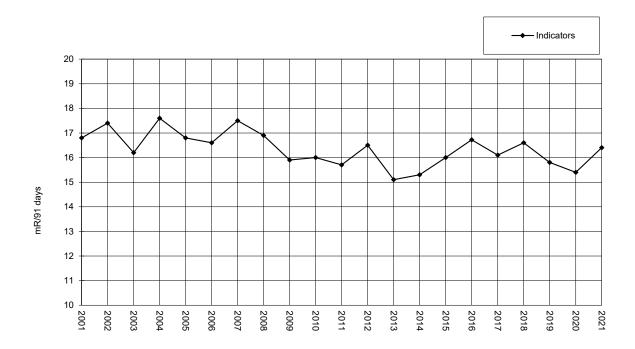

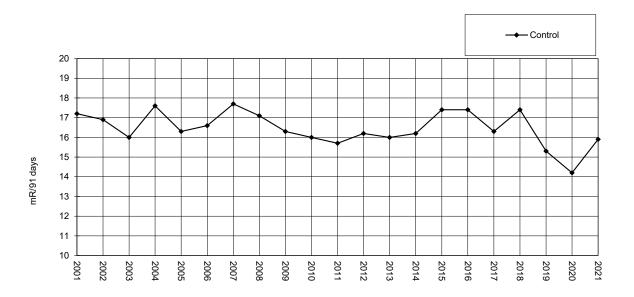
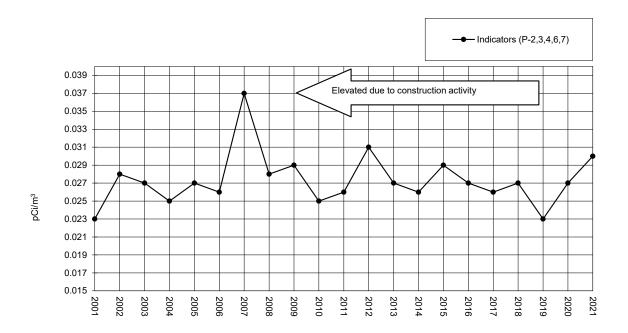


Figure 5.2 Airborne Particulates; analysis for gross beta, average mean of all indicator locations versus control location.



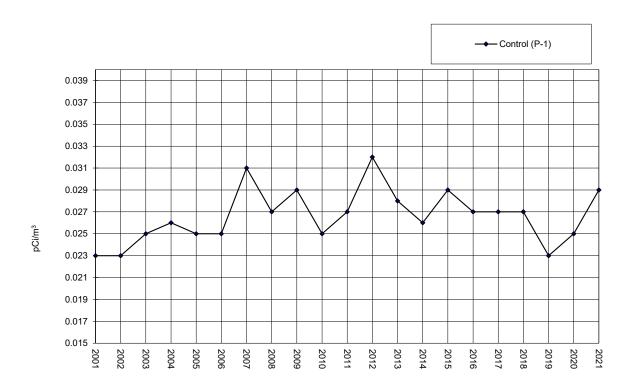


Table 5.1. Sample collection and analysis program, Prairie Island Nuclear Generating Plant.

	Location		Collection Type and	Analysis Type and
Medium	No.	Codes (and Type) ^a	Frequency ^b	Frequency ^c
Ambient radiation (TLD's)	54	P-01A - P-10A P-01B - P-15B P-01S - P-08S P-01IA - P-08IA P-01IB - P-08IB P-01IX- P-04IX, P-01C	C/Q	Ambient gamma
Airborne Particulates	6	P-1(C), P-2, P-3, P-4, P-6, P-7	C/W	GB, GS (QC of each location)
Airborne lodine	6	P-1(C), P-2, P-3, P-4, P-6, P-7	C/W	I-131
River water	2	P-5(C), P-6	G/W	GS(MC), H-3(QC)
Drinking water	1	P-11	G/W	GB(MC), I-131(MC) GS (MC), H-3 (QC)
Well water	5	P-6, P-8, P-9, P-24, P-43 (C)	G/Q	H-3, GS
Edible cultivated crops	1	P-30(C)	G/A	GS (I-131)
Leafy green vegetables	4	P-8, P-24, P-28, P-38(C)	G/A	GS (I-131)
Fish (three species, edible portion)	2	P-19(C), P-13	G/SA	GS
Periphyton or invertebrates	2	P-40(C), P-6	G/SA	GS
Bottom sediment	2	P-20(C), P-6	G/SA	GS
Shoreline sediment	1	P-12	G/SA	GS

^a Location codes are defined in Table 5.2. Control stations are indicated by (C). All other stations are indicators.

^b Collection type is coded as follows: C/ = continuous, G/ = grab. Collection frequency is coded as follows: W= weekly, M = monthly, Q = quarterly, SA = semiannually, A = annually.

^c Analysis type is coded as follows: GB = gross beta, GS = gamma spectroscopy, H-3 = tritium, I-131 = iodine-131.

Analysis frequency is coded as follows: MC = monthly composite, QC = quarterly composite.

Table 5.2. Sampling locations, Prairie Island Nuclear Generating Plant.

Code	Type ^a	Collection Site	Sample Type ^b	Distance and Direction from Reactor
P-1	С	Air Station P-1	AP, AI	11.8 mi @ 316°/NNW
P-2		Air Station P-2	AP, AI	0.5 mi @ 294°/WNW
P-3		Air Station P-3	AP, AI	0.8 mi @ 313°/NW
P-4		Air Station P-4	AP, AI	0.4 mi @ 359°/N
P-5	С	Upstream of Plant	RW	1.8 mi @ 11°/N
P-6		Lock and Dam #3 & Air Station P-6	AP, AI, RW WW, BS, BO ^c	1.6 mi @ 129°/SE
P-7		Air Station P-7	AP, AI	0.5 mi @ 271°/W
P-8		Community Center	WW	1.0 mi @ 321°/WNW
P-9		Plant Well #2	WW	0.3 mi @ 306°/NW
P-11		Red Wing Service Center	DW	3.3 mi @ 158°/SSE
P-12		Downstream of Plant	ss	3.0 mi @ 116°/ESE
P-13		Downstream of Plant	F ^C	3.5 mi @ 113 °/ESE
P-19	С	Upstream of Plant	F ^C	1.3 mi @ 0°/N
P-20	С	Upstream of Plant	BS	0.9 mi @ 45°/NE
P-24		Suter Residence	WW	0.6 mi @ 158°/SSE
P-28		Allyn Residence	VE	1.0 mi @ 152°/SSE
P-38	С	Cain Residence	VE	14.2 mi @ 359°/N
P-40	С	Upstream of Plant	BO ^c	0.4 mi @ 0°/N
P-43	С	Peterson Farm	WW	13.9 mi. @ 355°/N
General	Area of t	he Site Boundary		
P-01A		Property Line	TLD	0.4 mi @ 359°/N
P-02A		Property Line	TLD	0.3 mi @ 10°/N
P-03A		Property Line	TLD	0.5 mi @ 183°/S
P-04A		Property Line	TLD	0.4 mi @ 204°/SSW
P-05A		Property Line	TLD	0.4 mi @ 225°/SW
P-06A		Property Line	TLD	0.4 mi @ 249°/WSW
P-07A		Property Line	TLD	0.4 mi @ 268°/W
P-08A		Property Line	TLD	0.4 mi @ 291°/WNW
P-09A		Property Line	TLD	0.7 mi @ 317°/NW
		Property Line	TLD	0.5 mi @ 333°/NNW

Table 5.2. Sampling locations, Prairie Island Nuclear Generating Plant (continued).

Code	Type ^a	Collection Site	Sample Type ^b	Distance and Direction from Reactor
Approxin	nately 4	to 5 miles Distant from the Plant		
P-01B		Thomas Killian Residence	TLD	4.7 mi @ 355°/N
P-02B		Roy Kinneman Residence	TLD	4.8 mi @ 17°/NNE
P-03B		Wayne Anderson Farm	TLD	4.9 mi @ 46°/NE
P-04B		Nelson Drive (Road)	TLD	4.2 mi @ 61°/ENE
P-05B		County Road E and Coulee	TLD	4.2 mi @ 102°/ESE
P-06B		William Hauschildt Residence	TLD	4.4 mi @ 112°/ESE
P-07B		Red Wing Public Works	TLD	4.7 mi @ 140°/SE
P-08B		David Wnuk Residence	TLD	4.1 mi @ 165°/SSE
P-09B		Highway 19 South	TLD	4.2 mi @ 187°/S
P-10B		Cannondale Farm	TLD	4.9 mi @ 200°/SSW
P-11B		Wallace Weberg Farm	TLD	4.5 mi @ 221°/SW
P-12B		Ray Gergen Farm	TLD	4.6 mi @ 251°/WSW
P-13B		Thomas O'Rourke Farm	TLD	4.4 mi @ 270°/W
P-14B		David J. Anderson Farm	TLD	4.9 mi @ 306°/NW
P-15B		Holst Farms	TLD	3.8 mi @ 345°/NNW
Special I	nterest I	<u>Locations</u>		
P-01S		Federal Lock & Dam #3	TLD	1.6 mi @ 129°/SE
P-02S		Charles Suter Residence	TLD	0.5 mi @ 155°/SSE
P-03S		Carl Gustafson Farm	TLD	2.2 mi @ 173°/S
P-04S		Richard Burt Residence	TLD	2.0 mi @ 202°/SSW
P-05S		Kinney Store	TLD	2.0 mi @ 270°/W
P-06S		Earl Flynn Farm	TLD	2.5 mi @ 299°/WNW
P-07S		Indian Community	TLD	0.7 mi @ 271°/W
P-08S		Indian Community	TLD	0.7 mi @ 287°/WNW
P-01C	С	Robert Kinneman Farm	TLD	11.1 mi @ 331°/NNW

Table 5.2. Sampling locations, Prairie Island Nuclear Generating Plant (continued).

Code	Type ^a Collection Site	Sample Type ^b	Distance and Direction from ISFSI Center.					
ISFSI Are	ISFSI Area Inside Earth Berm							
P-01IA	ISFSI Nuisance Fence	TLD	190' @ 45 ⁰ /NE					
P-02IA	ISFSI Nuisance Fence	TLD	360' @ 82°/E					
P-03IA	ISFSI Nuisance Fence	TLD	370' @ 1 00°/E					
P-04IA	ISFSI Nuisance Fence	TLD	200' @ 134°/SE					
P-05IA	ISFSI Nuisance Fence	TLD	180' @ 219°/SW					
P-06IA	ISFSI Nuisance Fence	TLD	320' @ 258°/WSW					
P-07IA	ISFSI Nuisance Fence	TLD	320' @ 281°/WNW					
P-08IA	ISFSI Nuisance Fence	TLD	190' @ 318°/NW					
P-01IX	ISFSI Nuisance Fence	TLD	140' @ 180°/S					
P-02IX	ISFSI Nuisance Fence	TLD	310' @ 270°/W					
P-03IX	ISFSI Nuisance Fence	TLD	140' @ 0°/N					
P-04IX	ISFSI Nuisance Fence	TLD	360' @ 90°/E					
ISFSI Are	ea Outside Earth Berm							
P-01IB	ISFSI Berm Area	TLD	340' @ 3°/N					
P-02IB	ISFSI Berm Area	TLD	380' @ 28°/NNE					
P-03IB	ISFSI Berm Area	TLD	560' @ 85°/E					
P-04IB	ISFSI Berm Area	TLD	590' @ 165°/SSE					
P-05IB	ISFSI Berm Area	TLD	690' @ 1 86°/S					
P-06IB	ISFSI Berm Area	TLD	720' @ 201°/SSW					
P-07IB	ISFSI Berm Area	TLD	610' @ 271°/W					
P-08IB	ISFSI Berm Area	TLD	360' @ 332°/NNW					
^a "C" type denotes control location. All other locations are indicators.								

^b Sample Codes:

AP	Airborne particulates	F	Fish
ΑI	Airborne lodine	SS	Shoreline Sediments
BS	Bottom (river) sediments	SW	Surface Water
во	Bottom organisms	VE	Vegetation/vegetables
	(periphyton or macroinvertebrates)	WW	Well water
DW	Drinking water		

^c Distance and direction data for fish and bottom organisms are approximate since availability of sample specimen may vary at any one location.

Table 5.3. Missed collections and analyses at the Prairie Island Nuclear Generating Plant.

All required samples were collected and analyzed in 2021 as scheduled without exception:

Sample Type	Analysis	Location	Collection Date or Period	Reason for not Conducting REMP as Required	Plan for Preventing Recurrence
None					

Table 5.4 Radiological Environmental Monitoring Program Summary

Name of Facility Prairie Island Nuclear Power Station Docket No. 50-282, 50-306

Location of Facility Goodhue, Minnesota Reporting Period (County, State)

Sample Type and			Indicator Locations	Location with F Annual Me	Control Locations	Number Non-				
Туре	Number of	LLD ^b Mean (F) ^c			Mean (F) ^c	Mean (F) ^c	Routine			
(Units)	s) Analyses ^a		Range ^c	Location ^d	Range ^c	Range ^c	Results ^e			
Direct Radiation										
TLD (Inner Ring, Area at Site Boundary) mR/91 days)	Gamma 40	3.0	16.1 (40/40) (13.6-19.3)	P-06A Property Line 0.4 mi @ 249° /WSW	17.5 (4/4) (16.1-18.9)	(See Control below.)	0			
TLD (Outer Ring, 4-5 mi. distant) mR/91 days)	Gamma 60	3.0	16.6 (60/60) (12.4-21.3)	P-04B, Nelson Drive 4.2 mi @ 61°/ENE	19.6 (4/4) (17.1-21.3)	(See Control below.)	0			
TLD (Special Interest Areas) mR/91 days)	Gamma 32	3.0	15.7 (32/32) (12.6-20.9)	P-04S, Richard Burt, 2.0 mi @ 202° /SSW	18.5 (4/4) (16.0-20.9)	(See Control below.)	0			
TLD (Control) mR/91 days)	Gamma 4	3.0	None	P-01C, Robert Kinneman 11.1 mi @ 331° /NNW	15.9 (4/4) (14.9-17.1)	15.9 (4/4) (14.9-17.1)	0			
	•		Airb	orne Pathway		•				
Airborne Particulates (pCi/m³)	GB 312	0.005	0.030 (260/260) (0.008-0.070)	P-07, Air Station 0.5 mi @ 271° /W	0.031 (52 /52) (0.011-0.068)	0.029 (52/52) (0.007-0.067)	0			
, ,	GS 24 Be-7	0.015	0.088 (20/20) (0.061-0.113)	P-03, Air Station 0.8 mi @ 313° /NW	0.091 (4/4) (0.067-0.111)	0.086 (4/4) (0.059-0.103)	0			
	Mn-54	0.0009	< LLD	-	-	< LLD	0			
	Co-58	0.0008	< LLD	-	-	< LLD	0			
	Co-60	0.0007	< LLD	-	-	< LLD	0			
	Zn-65	0.0012 0.0011	< LLD	-	-	< LLD	0			
	Zr-Nb-95 Ru-103	0.0011	< LLD < LLD	-	- -	< LLD < LLD	0			
	Ru-103	0.0062	< LLD	_	<u>-</u>	< LLD	0			
	Cs-134		< LLD	-	-	< LLD	0			
	Cs-137	0.0007	< LLD	-	-	< LLD	0			
		0.0030	< LLD	-	-	< LLD	0			
	Ce-141 Ce-144	0.0016 0.0045	< LLD < LLD	-	- -	< LLD < LLD	0 0			
Airborne Iodine (pCi/m³)	I-131 312	0.030	<lld< td=""><td>-</td><td>-</td><td>< LLD</td><td>0</td></lld<>	-	-	< LLD	0			

Table 5.4 Radiological Environmental Monitoring Program Summary

Name of Facility Prairie Island Nuclear Power Station Docket No. 50-282, 50-306

Location of Facility Goodhue, Minnesota Reporting Period January-December, 2021

(County, State)

Sample	Type and		Indicator Locations	Location with Highest Annual Mean		Control Locations	Number Non-
Type (Units)	Number of Analyses ^a	LLD⁵	Mean (F) ^c Range ^c	Location ^d	Mean (F) ^c Range ^c	Mean (F) ^c Range ^c	Routine Results ^e
			Terre	strial Pathway			
Crops - Cabbage (pCi/gwet)	I-131 :	0.016	< LLD	-	-	< LLD	0
Well Water (pCi/L)	H-3 2	0 165	<lld< td=""><td>-</td><td>-</td><td>< LLD</td><td>0</td></lld<>	-	-	< LLD	0
	GS 20						
	Mn-54	10	< LLD	-	-	< LLD	0
	Fe-59	30	< LLD	-	-	< LLD	0
	Co-58	10	< LLD	-	-	< LLD	0
	Co-60	10	< LLD	-	-	< LLD	0
	Zn-65	30	< LLD	-	-	< LLD	0
	Zr-Nb-95	15	< LLD	-	-	< LLD	0
	Cs-134	10	< LLD	-	-	< LLD	0
	Cs-137	10	< LLD	-	-	< LLD	0
	Ba-La-140	15	< LLD	-	-	< LLD	0
	Ce-144	46	< LLD	-	-	< LLD	0

Table 5.4 Radiological Environmental Monitoring Program Summary

Name of Facility Prairie Island Nuclear Power Station Docket No. 50-282, 50-306

Location of Facility Goodhue, Minnesota Reporting Period January-December, 2021

(County, state)

Sample	Type a	nd	Indicator	Location with I	Highest	Control	Number
Туре	Numbe	rof	Locations Mean(F) ^c	Annual Mean		Locations	Non-
(Units)	Analyse	es ^a LLD ^b	Range	Location ^d	Mean (F) ^c Range ^c	Mean (F) ^c Range ^c	Routine Results ^e
	_		Water	borne Pathway		_	
Drinking Water (pCi/L)	GB	12 1.0	9.2 (12/12) (7.1-11.7)	P-11, Red Wing S.C. 3.3 mi @ 158°/SSE	9.2 (12/12) (7.1-11.7)	None	0
. ,	I-131	12 1.0	< LLD	=	-	None	0
	H-3	4 160	< LLD	-	-	None	0
	GS	12		=	-		
	Mn-54	1 10	< LLD	-	-	None	0
	Fe-59	30	< LLD	-	-	None	0
	Co-58	3 10	< LLD	-	-	None	0
	Co-60	10	< LLD	-	-	None	0
	Zn-65	30	< LLD	-	-	None	0
	Zr-Nb	-95 15	< LLD	-	-	None	0
	Cs-13	10	< LLD	-	-	None	0
	Cs-13	7 10	< LLD	-	-	None	0
	Ba-La	-140 15	< LLD	_	_	None	0
	Ce-14	41	< LLD	-	-	None	0
River Water	H-3	8 160	< LLD	-	-	< LLD	0
(pCi/L)	GS :	24					
	Mn-54	ł .	< LLD	_	_	< LLD	0
	Fe-59	· -	< LLD	_	_	< LLD	0
	Co-58	ł .	< LLD	-	_	< LLD	0
	Co-60	ŀ	< LLD	-	_	< LLD	0
	Zn-65	Į.		-	_		
	Zr-Nb		< LLD < LLD	-	_	< LLD < LLD	0
	Cs-13			-	_		0
	Cs-13		< LLD < LLD	-	-	< LLD < LLD	0
	Ba-La		< LLD	-	_	< LLD	0
	Ce-14		< LLD	-	-	< LLD	0
Fish		2					
(pCi/g wet)	K-40	0.10	3.20 (6/6) (2.76-3.79)	P-13, Downstream 3.5 mi @ 113° /ESE	3.20 (6/6) (2.76-3.79)	3.17 (6/6) (2.58-3.56)	0
	Mn-54	0.026	< LLD	-	-	< LLD	0
	Fe-59		< LLD	-	-	< LLD	0
	Co-58		< LLD	-	-	< LLD	0
	Co-60		< LLD	-	-	< LLD	0
	Zn-65		< LLD	-	-	< LLD	0
	Zr-Nb		< LLD	-	-	< LLD	0
	Cs-13		< LLD	-	-	< LLD	0
	Cs-13	l.	< LLD	-	-	< LLD	0
	Ba-La	1-140 0.091	< LLD	-	-	< LLD	0

Table 5.4 Radiological Environmental Monitoring Program Summary

Name of Facility Prairie Island Nuclear Power Station Docket No. 50-282,50-306

Location of Facility Goodhue, Minnesota Reporting Period January-December, 2021

(County, State)

Sample Type (Units)	Type and Number of Analyses	$LLD^{\mathtt{b}}$	Indicator Locations Mean (F) ^c Range ^c	Location with H Annual Me Location ^d	=	Control Locations Mean (F) ^c Range ^c	Number Non- Routine Results ⁶
,				borne Pathway			1
Invertebrates	GS 4		774.0	Joine Fulling			
(pCi/g wet)	GS 4						
(1 - 3)	Be-7	0.23	< LLD	-	_	<lld< td=""><td>0</td></lld<>	0
	K-40	0.37	1.61 (2/2) (1.48-1.74)	P-6, Lock and Dam #3 1.6 mi @ 129° /SE	1.61 (2/2) (1.48-1.74)	1.27 (2/2) (0.72-1.81)	0
	Mn-54	0.018	< LLD	-	-	< LLD	0
	Co-58	0.023	< LLD	-	-	< LLD	0
	Co-60	0.019	< LLD	-	-	< LLD	0
	Zn-65 Zr-Nb-95	0.036 0.034	< LLD < LLD	-	-	< LLD < LLD	0
	Ru-103	0.034	< LLD	-	-	< LLD	0
	Ru-106	0.136	< LLD	- -	_	< LLD	0
	Cs-134	0.017	< LLD	-	_	< LLD	0
	Cs-137	0.018	< LLD	-	-	< LLD	0
	Ba-La-140	0.117	< LLD	-	-	< LLD	0
	Ce-141	0.044	< LLD	-	-	< LLD < LLD	0
	Ce-144	0.100	< LLD	-	-	\ LLD	U
Bottom and	GS 6						
Shoreline							
Sediments	Be-7	0.35	< LLD	-	-	< LLD	0
(pCi/g dry)	K-40		7.57 (4/4) (5.07-9.51)	P-6,Lock and Dam #3 1.6 mi @ 129° /SE	9.40 (2/2) (9.30-9.51)	8.79 (2/2) (7.81-9.76)	0
	Mn-54	0.024	< LLD	-	-	< LLD	0
	Co-58	0.025	< LLD	-	-	< LLD	0
	Co-60	0.018	< LLD	-	-	< LLD	0
	Zn-65	0.054	< LLD	-	-	< LLD	0
	Zr-Nb-95	0.036	< LLD	-	-	< LLD	0
	Ru-103	0.044	< LLD	-	-	< LLD	0
	Ru-106	0.184	< LLD	-	-	< LLD	0
	Cs-134	0.019	< LLD	-	-	< LLD	0
	Cs-137	0.020	< LLD	-	-	< LLD	0
	Ba-La-140	0.145	< LLD	-	-	< LLD	0
	Ce-141	0.102	< LLD	-	-	< LLD	0

^a GB = gross beta, GS = gamma scan.

^b LLD = nominal lower limit of detection based on a 4.66 sigma counting error for background sample.

^c Mean and range are based on detectable measurements only. Fraction of detectable measurements at specified locations is indicated in parentheses (F).

d Locations are specified: (1) by name, and/or station code and (2) by distance (miles) and direction relative to reactor site.

^e Non-routine results are those which exceed ten times the control station value. If no control station value is available, the result is considered non-routine if it exceeds ten times the typical preoperational value for the medium or location.

6.0 REFERENCES CITED

Arnold, J. R. and H. A. Al-Salih. 1955. Beryllium-7 Produced by Cosmic Rays. Science 121: 451-453. Eisenbud, M. 1963. Environmental Radioactivity, McGraw-Hill, New York, New York, pp. 213, 275 and 276. Environmental, Inc., Midwest Laboratory. 2001a through 2020a. Radiation Environmental Monitoring for Monticello Nuclear Generating Plant, Complete Analysis Data Tables, January-December, 2000 through 2019. 2001b through 2020b. Radiation Environmental Monitoring for Prairie Island Nuclear Generating Plant, Complete Analysis Data Tables, January - December, 2000 through 2019. 1984a to 2000a. (formerly Teledyne Brown Engineering Environmental Services, Midwest Laboratory) Radiation Environmental Monitoring for Monticello Nuclear Generating Plant, Complete Analysis Data Tables, January - December, 1983 through 1999. 1984b to 2000b. (formerly Teledyne Brown Engineering Environmental Services, Midwest Laboratory) Radiation Environmental Monitoring for Prairie Island Nuclear Generating Plant, Complete Analysis Data Tables, January - December, 1983 through 1999. 1979a to 1983a. (formerly Hazleton Environmental Sciences Corporation) Radiation Environmental Monitoring for Monticello Nuclear Generating Plant, Complete Analysis Data Tables, January - December, 1978 through 1982. 1979b to 1983b. (formerly Hazleton Environmental Sciences Corporation) Radiation Environmental Monitoring for Prairie Island Nuclear Generating Plant, Complete Analysis Data Tables, January -December, 1978 through 1982. 2022. Quality Manual, Rev. 7, 15 January 2022. 2012. Quality Assurance Program Manual, Rev. 3, 14 November 2012. 2020. Quality Control Procedures Manual, Rev. 4, 15 January 2020. 2009. Quality Control Program, Rev. 2, 12 November 2009. Gold, S., H. W. Barkhau, B. Shlein, and B. Kahn, 1964. Measurement of Naturally Occurring Radionuclides in Air, in the Natural Environment, University of Chicago Press, Chicago, Illinois, 369-382. Northern States Power Company. 1972 through 1974. Prairie Island Nuclear Generating Plant, Environmental Monitoring and Ecological Studies Program, January 1, 1971 to December 31, 1971, 1972, 1973. Minneapolis, Minnesota. 1979 to 2008. Prairie Island Nuclear Generating Plant, Annual Radiation Environmental Monitoring Report to the U.S. Nuclear Regulatory Commission, January 1 to December 31, 1978 through 2007. Minneapolis, Minnesota. Prairie Island Nuclear Generating Plant, 2013. Radiological Environmental Monitoring for Prairie Island Nuclear Generating Plant, Radiation Protection Implementing Procedures, 4700 series.

New York, NY.

U.S. Dep't of Energy 1997 HASL-300, Edition 28, Procedures Manual, Environmental Measurements Laboratory,

Environmental Protection Agency .
1980. Prescribed Procedures for Measurement of Radioactivity in Drinking Water, Cincinnati, Ohio (EPA- 600/4-80-032).
1984. Eastern Environmental Radiation Facility, Radiochemistry Procedures Manual, Montgomery, Alabama (EPA-520/5-84-006).
2012. RadNet, formerly Environmental Radiation Ambient Monitoring System, Gross Beta in Air Gross Beta in Drinking Water (MN) 1981– 2009.
Wilson, D. W., G. M. Ward and J. E. Johnson. 1969. In Environmental Contamination by Radioactive Materials International Atomic Energy Agency. p.125.
Xcel Energy Corporation.
2009 to 2020. Monticello Nuclear Generating Plant, Annual Radiological Environmental Monitoring Report to the U.S. Nuclear Regulatory Commission, January 1 to December 31, 2008 through 2020 Minneapolis, Minnesota.
2009 to 2020. Prairie Island Nuclear Generating Plant, Annual Radiological Environmenta Monitoring Report to the U.S. Nuclear Regulatory Commission, January 1 to December 31, 2008 through 2020. Minneapolis, Minnesota.



APPENDIX A

INTERLABORATORY AND INTRALABORATORY COMPARISON PROGRAM RESULTS

NOTE: Appendix A is updated four times a year. The complete appendix is included in March, June, September and December monthly progress reports only.

January, 2021 through December, 2021

Appendix A

Interlaboratory/ Intralaboratory Comparison Program Results

Environmental, Inc., Midwest Laboratory has participated in interlaboratory comparison (crosscheck) programs since the formulation of its quality control program in December 1971. These programs are operated by agencies which supply environmental type samples containing concentrations of radionuclides known to the issuing agency but not to participant laboratories. The purpose of such a program is to provide an independent check on a laboratory's analytical procedures and to alert it of any possible problems.

Participant laboratories measure the concentration of specified radionuclides and report them to the issuing agency. Several months later, the agency reports the known values to the participant laboratories and specifies control limits. Results consistently higher or lower than the known values or outside the control limits indicate a need to check the instruments or procedures used.

Results in Table A-1 were obtained through participation in the RAD PT Study Proficiency Testing Program administered by Environmental Resource Associates, serving as a replacement for studies conducted previously by the U.S. EPA Environmental Monitoring Systems Laboratory, Las Vegas, Nevada.

Table A-2 lists results for thermoluminescent dosimeters (TLDs), via irradiation and evaluation by the University of Wisconsin-Madison Radiation Calibration Laboratory at the University of Wisconsin Medical Radiation Research Center.

Table A-3 lists results of the analyses on intralaboratory "spiked" samples for the past twelve months. All samples are prepared using NIST traceable sources. Data for previous years available upon request.

Table A-4 lists results of the analyses on intralaboratory "blank" samples for the past twelve months. Data for previous years available upon request.

Table A-5 lists analytical results from the intralaboratory "duplicate" program for the past twelve months. Acceptance is based on each result being within 25% of the mean of the two results or the two sigma uncertainties of each result overlap.

The results in Table A-6 were obtained through participation in the Mixed Analyte Performance Evaluation Program.

Results in Table A-7 were obtained through participation in the MRAD PT Study Proficiency Testing Program administered by Environmental Resource Associates, serving as a replacement for studies conducted previously by the Environmental Measurement Laboratory Quality Assessment Program (EML).

Attachment A lists the laboratory acceptance criteria for various analyses.

Out-of-limit results are explained directly below the result.

Attachment A

ACCEPTANCE CRITERIA FOR INTRALABORATORY "SPIKED" SAMPLES

Analysis	Ratio of lab result to known value.
Gamma Emitters	0.8 to 1.2
Strontium-89, Strontium-90	0.8 to 1.2
Potassium-40	0.8 to 1.2
Gross alpha	0.5 to 1.5
Gross beta	0.8 to 1.2
Tritium	0.8 to 1.2
Radium-226, Radium-228	0.7 to 1.3
Plutonium	0.8 to 1.2
lodine-129, lodine-131	0.8 to 1.2
Nickel-63, Technetium-99, Uranium-238	0.7 to 1.3
Iron-55	0.8 to 1.2
Other Analyses	0.8 to 1.2

TABLE A-1. Interlaboratory Comparison Crosscheck program, Environmental Resource Associates (ERA)^a. RAD study

	Concentration (pCi/L)							
Lab Code	Date	Analysis	Laboratory	ERA	Control			
			Result	Result	Limits	Acceptance		
RAD-124 Stud	у							
ERW-94	1/11/2021	Ba-133	24.1 ± 3.5	23.8	18.4 - 27.4	Pass		
ERW-94	1/11/2021	Cs-134	46.1 ± 3.1	42.8	34.2 - 47.1	Pass		
ERW-94	1/11/2021	Cs-137	154 ± 6.0	148	133 - 165	Pass		
ERW-94	1/11/2021	Co-60	39.4 ± 3.2	34.6	30.8 - 40.8	Pass		
ERW-94	1/11/2021	Zn-65	66.2 ± 6.3	61.6	54.6 - 75.0	Pass		
ERDW-96	1/11/2021	Gr. Alpha	58.4 ± 2.6	63.3	33.2 - 78.5	Pass		
ERDW-96	1/11/2021	Gr. Beta	38.1 ± 1.3	39.8	26.4 - 47.3	Pass		
ERDW-98	1/11/2021	Ra-226	16.3 ± 0.5	15.5	11.5 - 17.8	Pass		
ERDW-98	1/11/2021	Ra-228	12.3 ± 1.2	12.9	8.54 - 15.8	Pass		
ERDW-98	1/11/2021	Uranium	33.2 ± 1.8	30.1	24.4 - 33.4	Pass		
ERW-100	1/11/2021	H-3	2,100 ± 160	2,120	1,750 - 2,350	Pass		
RAD-126 Stud	у							
ERDW-2194	7/12/2021	Ba-133	44.1 ± 4.0	45.5	37.2 - 50.6	Pass		
ERDW-2194	7/12/2021	Cs-134	85.2 ± 3.9	87.5	71.8 - 96.2	Pass		
ERDW-2194	7/12/2021	Cs-137	218 ± 8	208	187 - 230	Pass		
ERDW-2194	7/12/2021	Co-60	91.7 ± 4.0	87.1	78.4 - 98.1	Pass		
ERDW-2194	7/12/2021	Zn-65	114 ± 9	102	91.8 - 122.0	Pass		
ERDW-2196	7/12/2021	Gr. Alpha	61.5 ± 2.9	49.1	25.6 - 61.7	Pass		
ERDW-2196	7/12/2021	Gr. Beta	31.7 ± 1.3	31.5	20.3 - 39.2	Pass		
ERDW-2200	7/12/2021	Ra-226	16.5 ± 0.5	13.4	10.0 - 15.4	Fail ^b		
ERDW-2200	7/12/2021	Ra-228	8.7 ± 1.0	7.6	4.81 - 9.7	Pass		
ERDW-2200	7/12/2021	Uranium	71.7 ± 2.3	62.3	50.9 - 68.5	Fail ^c		
ERDW-2202	7/12/2021	H-3	11,300 ± 300	10,400	9,050 - 11,400	Pass		
ERDW-2198	7/12/2021	I-131	22.3 ± 1.1	20.8	17.2 - 25.0	Pass		

^a Results obtained by Environmental, Inc., Midwest Laboratory as a participant in the crosscheck program for proficiency testing in drinking water conducted by Environmental Resource Associates (ERA).

^b The radium-226 result did not meet ERA acceptance criteria.

^c The uranium result did not meet ERA acceptance criteria.

TABLE A-2. Thermoluminescent Dosimetry, (TLD, CaSO₄: Dy Cards).^a

				mrem	
Lab Code	Irradiation		Delivered	Reported ^b	Performance ^c
	Date	Description	Dose	Dose	Quotient (P)
Environment	al, Inc.	Group 1			
2021-1	11/8/2021	Spike 1	167.0	171.4	0.03
2021-1	11/8/2021	Spike 2	167.0	159.4	-0.05
2021-1	11/8/2021	Spike 3	167.0	160.8	-0.04
2021-1	11/8/2021	Spike 4	167.0	164.5	-0.01
2021-1	11/8/2021	Spike 5	167.0	156.7	-0.06
2021-1	11/8/2021	Spike 6	167.0	152.3	-0.09
2021-1	11/8/2021	Spike 7	167.0	158.7	-0.05
2021-1	11/8/2021	Spike 8	167.0	161.6	-0.03
021-1	11/8/2021	Spike 9	167.0	152.4	-0.09
021-1	11/8/2021	Spike 10	167.0	155.7	-0.07
021-1	11/8/2021	Spike 11	167.0	158.8	-0.05
021-1	11/8/2021	Spike 12	167.0	163.1	-0.02
021-1	11/8/2021	Spike 13	167.0	162.2	-0.03
021-1	11/8/2021	Spike 14	167.0	158.8	-0.05
021-1	11/8/2021	Spike 15	167.0	173.5	0.04
2021-1	11/8/2021	Spike 16	167.0	158.7	-0.05
2021-1	11/8/2021	Spike 17	167.0	162.9	-0.02
2021-1	11/8/2021	Spike 18	167.0	159.3	-0.05
2021-1	11/8/2021	Spike 19	167.0	158.2	-0.05
021-1	11/8/2021	Spike 20	167.0	161.7	-0.03
lean (Spike	1-20)			160.5	-0.04
Standard De	viation (Spike 1	-20)		5.2	0.03

a TLD's were irradiated by the University of Wisconsin-Madison Radiation Calibration Laboratory following ANSI N13.37 protocol from a known air kerma rate. TLD's were read and the results were submitted by Environmental Inc. to the University of Wisconsin-Madison Radiation Calibration Laboratory for comparison to the delivered dose.

b Reported dose was converted from exposure (R) to Air Kerma (cGy) using a conversion of 0.876. Conversion from air kerma to ambient dose equivalent for Cs-137 at the reference dose point $H^*(10)K_a = 1.20$. mrem/cGy = 1000.

c Performance Quotient (P) is calculated as ((reported dose - conventionally true value) ÷ conventionally true value) where the conventionally true value is the delivered dose.

d Acceptance is achieved when neither the absolute value of the mean of the P values, nor the standard deviation of the P values exceed 0.15.

TABLE A-2. Thermoluminescent Dosimetry, (TLD, CaSO₄: Dy Cards).^a

				mrem	
Lab Code	Irradiation	-	Delivered	Reported ^b	Performance ^c
	Date	Description	Dose	Dose	Quotient (P)
Environment	al, Inc.	Group 2			
2021-2	11/8/2021	Spike 21	102.0	98.3	-0.04
2021-2	11/8/2021	Spike 22	102.0	88.4	-0.13
2021-2	11/8/2021	Spike 23	102.0	96.7	-0.05
2021-2	11/8/2021	Spike 24	102.0	101.4	-0.01
2021-2	11/8/2021	Spike 25	102.0	98.5	-0.03
2021-2	11/8/2021	Spike 26	102.0	96.3	-0.06
2021-2	11/8/2021	Spike 27	102.0	95.8	-0.06
2021-2	11/8/2021	Spike 28	102.0	94.3	-0.08
2021-2	11/8/2021	Spike 29	102.0	93.5	-0.08
2021-2	11/8/2021	Spike 30	102.0	95.7	-0.06
2021-2	11/8/2021	Spike 31	102.0	101.7	0.00
2021-2	11/8/2021	Spike 32	102.0	98.5	-0.03
2021-2	11/8/2021	Spike 33	102.0	96.7	-0.05
2021-2	11/8/2021	Spike 34	102.0	87.2	-0.15
2021-2	11/8/2021	Spike 35	102.0	89.7	-0.12
2021-2	11/8/2021	Spike 36	102.0	88.5	-0.13
2021-2	11/8/2021	Spike 37	102.0	85.4	-0.16
2021-2	11/8/2021	Spike 38	102.0	90.0	-0.12
2021-2	11/8/2021	Spike 39	102.0	90.9	-0.11
2021-2	11/8/2021	Spike 40	102.0	92.6	-0.09
Mean (Spike	21-40)			94.0	-0.08
Standard De	Standard Deviation (Spike 21-40)			4.7	0.05

a TLD's were irradiated by the University of Wisconsin-Madison Radiation Calibration Laboratory following ANSI N13.37 protocol from a known air kerma rate. TLD's were read and the results were submitted by Environmental Inc. to the University of Wisconsin-Madison Radiation Calibration Laboratory for comparison to the delivered dose.

b Reported dose was converted from exposure (R) to Air Kerma (cGy) using a conversion of 0.876. Conversion from air kerma to ambient dose equivalent for Cs-137 at the reference dose point $H^*(10)K_a = 1.20$. mrem/cGy = 1000.

c Performance Quotient (P) is calculated as ((reported dose - conventionally true value) ÷ conventionally true value) where the conventionally true value is the delivered dose.

d Acceptance is achieved when neither the absolute value of the mean of the P values, nor the standard deviation of the P values exceed 0.15.

TABLE A-3. Intralaboratory "Spiked" Samples

1			Conce	ntration ^a			
Lab Code ^b	Date	Analysis	Laboratory results 2s, n=1 ^c	Known Activity	Control Limits ^d	Acceptance	Ratio Lab/Known
SPW-55	1/8/2021	H-3	1,889 ± 150	2,110	1,688 - 2,532	Pass	0.90
SPW-55 SPDW-62	1/0/2021	п-э Gr. Alpha	34.3 ± 1.7	64.9	34.0 - 80.4	Pass	0.53
		•		8.9			
SPDW-62 SPW-131	1/11/2021 1/19/2021	Gr. Beta Sr-90	9.2 ± 0.8 18.0 ± 1.1	6.9 17.9	3.6 - 17.4 14.3 - 21.5	Pass Pass	1.04 1.00
		Si-90 H-3					
SPW-133	1/19/2021		1,842 ± 150	2,110	1,688 - 2,532	Pass	0.87
SPW-188	1/18/2021	Ra-228	14.2 ± 1.7	14.9	10.4 - 19.3	Pass	0.96
SPW-236	1/26/2021	Ra-228	12.2 ± 1.9	15.3	10.7 - 19.9	Pass	0.80
SPW-305	2/5/2021	H-3	1,785 ± 147	2,110	1,688 - 2,532	Pass	0.85
SPW-372	2/12/2021	H-3	1,742 ± 145	2,110	1,688 - 2,532	Pass	0.83
SPW-526	3/5/2021	H-3	1,899 ± 150	2,110	1,688 - 2,532	Pass	0.90
SPW-526 SPW-692	3/19/2021	п-3 H-3	1,899 ± 150 1,953 ± 151	2,110	1,688 - 2,532	Pass	0.90
SPW-692 SPW-694	1/4/2021	п-э Ra-226	1,955 ± 151 9.7 ± 0.4	12.3	8.6 - 16.0	Pass	0.93
SPW-894 SPW-800	3/30/2021	Ra-228				Pass	
			15.8 ± 2.0	15.3	10.7 - 19.9		1.03
SPW-802	3/31/2021	H-3	1,878 ± 150	2,110	1,688 - 2,532	Pass	0.89
SPW-810	3/19/2021	Ra-226	11.4 ± 0.3	12.3	8.6 - 16.0	Pass	0.93
SPDW-30103	3/31/2021	Ra-226	13.5 ± 0.4	12.3	8.6 - 16.0	Pass	1.10
SPW-812	4/1/2021	H-3	2,005 ± 155	2,110	1,688 - 2,532	Pass	0.95
SPW-919	4/7/2021	H-3	1,877 ± 149	2,110	1,688 - 2,532	Pass	0.89
SPW-944	4/9/2021	Gr. Alpha	56.7 ± 2.5	58.4	29.2 - 87.6	Pass	0.97
SPW-944	4/9/2021	Gr. Beta	35.1 ± 1.3	38.1	30.5 - 45.7	Pass	0.92
SPW-1048	4/15/2021	H-3	1,915 ± 152	2,110	1,688 - 2,532	Pass	0.91
SPW-1250	4/30/2021	H-3	2,015 ± 154	2,110	1,688 - 2,532	Pass	0.95
SPW-1373	5/11/2021	Gr. Alpha	63.5 ± 2.9	58.4	29.2 - 87.6	Pass	1.09
SPW-1373	5/11/2021	Gr. Beta	38.5 ± 1.3	38.1	30.5 - 45.7	Pass	1.01
SPW-1377	5/11/2021	Sr-90	17.4 ± 1.2	17.9	14.3 - 21.5	Pass	0.97
SPDW-30108	5/28/2021	H-3	2,222 ± 161	2,110	1,688 - 2,532	Pass	1.05
SPDW-30125	5/13/2021	Ra-226	10.9 ± 0.3	12.3	8.6 - 16.0	Pass	0.89
						_	
SPDW-30118	6/4/2021	H-3	2,230 ± 163	2,110	1,688 - 2,532	Pass	1.06
SPMI-1672	6/8/2021	Sr-90	14.2 ± 0.9	13.6	10.9 - 16.3	Pass	1.04
SPDW-30160	6/11/2021	Ra-226	11.4 ± 0.3	12.3	8.6 - 16.0	Pass	0.93
SPDW-30129	6/15/2021	H-3	2,238 ± 162	2,110	1,688 - 2,532	Pass	1.06
SPDW-30134	6/18/2021	Gr. Alpha	17.9 ± 1.4	23.5	11.8 - 35.3	Pass	0.76
SPDW-30134	6/18/2021	Gr. Beta	60.9 ± 1.6	67.6	54.1 - 81.1	Pass	0.90
SPDW-30148	6/25/2021	Ra-228	15.1 ± 2.9	15.3	10.7 - 19.9	Pass	0.98
SPDW-30206	7/8/2021	Ra-226	12.7 ± 0.4	12.3	8.6 - 16.0	Pass	1.03
SPDW-3001	7/29/2021	Ra-226	11.6 ± 0.3	12.3	8.6 - 16.0	Pass	0.95

^a Liquid sample results are reported in pCi/Liter, air filters (pCi/m3), charcoal (pCi/charcoal canister), and solid samples (pCi/kg).

^b Laboratory codes: W & SPW (Water), MI (milk), AP (air filter), SO (soil), VE (vegetation), CH (charcoal canister), F (fish), U (urine).

^c Results are based on single determinations.
^d Acceptance criteria are listed in Attachment A of this report.

TABLE A-3. Intralaboratory "Spiked" Samples

			Concentration) ^a		-	
Lab Code ^b	Date	Analysis	Laboratory results 2s, n=1°	Known Activity	Control Limits ^d	Acceptance	Ratio Lab/Known
SPDW-30224	8/2/2021	Gr. Alpha	38.6 ± 2.1	49.1	24.6 - 73.7	Pass	0.79
SPDW-30224	8/2/2021	Gr. Beta	27.8 ± 1.2	31.5	25.2 - 37.8	Pass	0.88
SPDW-30226	8/13/2021	H-3	2,074 ± 157	2,110	1,688 - 2,532	Pass	0.98
SPDW-30231	8/18/2021	Ra-228	14.5 ± 2.2	15.3	10.7 - 19.9	Pass	0.95
SPW-2783	9/3/2021	Sr-90	18.9 ± 1.2	17.1	13.7 - 20.5	Pass	1.10
SPDW-2785	9/3/2021	H-3	2,135 ± 158	2,110	1,688 - 2,532	Pass	1.01
SPDW-2891	9/10/2021	H-3	2,159 ± 160	2,110	1,688 - 2,532	Pass	1.02
SPDW-3115	9/17/2021	Ra-226	11.3 ± 0.3	12.3	8.6 - 16.0	Pass	0.92
SPDW-3036	9/23/2021	Ra-228	18.0 ± 2.6	15.3	10.7 - 19.9	Pass	1.17
SPDW-3223	9/28/2021	Ra-228	16.6 ± 2.5	15.3	10.7 - 19.9	Pass	1.08
SPDW-3288	9/29/2021	U-234	29.2 ± 1.6	23.0	16.1 - 29.9	Pass	1.27
SPDW-3288	9/29/2021	U-238	28.2 ± 1.6	23.2	16.3 - 30.2	Pass	1.21
SPDW-30276	9/29/2021	Ra-226	9.4 ± 0.4	12.3	8.6 - 16.0	Pass	0.76
SPDW-3157	10/1/2021	H-3	2,111 ± 158	2,110	1,688 - 2,532	Pass	1.00
SPDW-3290	10/12/2021	Gr. Alpha	34.6 ± 2.1	49.1	24.6 - 73.7	Pass	0.70
SPDW-3290	10/12/2021	Gr. Beta	25.1 ± 1.1	31.5	25.2 - 37.8	Pass	0.80
SPDW-3393	10/15/2021	H-3	2,184 ± 161	2,110	1,688 - 2,532	Pass	1.04
SPDW-3604	10/28/2021	H-3	2,104 ± 15	2,110	1,688 - 2,532	Pass	1.00
SPDW-30283	11/4/2021	Ra-226	11.7 ± 0.3	12.3	8.6 - 16.0	Pass	0.95
SPDW-3769	11/10/2021	H-3	2,026 ± 156	2,110	1,688 - 2,532	Pass	0.96
SPDW-3860	11/18/2021	H-3	2,161 ± 161	2,110	1,688 - 2,532	Pass	1.02
SPDW-30290	11/22/2021	Ra-226	12.0 ± 0.3	12.3	8.6 - 16.0	Pass	0.97
SPDW-3958	12/3/2021	H-3	2,126 ± 160	2,110	1,688 - 2,532	Pass	1.01
SPW-3971	12/7/2021	Sr-90	19.0 ± 1.2	17.1	13.7 - 20.5	Pass	1.11
SPDW-30287	12/9/2021	Ra-228	12.3 ± 1.7	15.3	10.7 - 19.9	Pass	0.80
SPDW-30295	12/16/2021	H-3	2,265 ± 163	2,110	1,688 - 2,532	Pass	1.07
SPDW-30301	12/30/2021	H-3	2,055 ± 163	2,110	1,688 - 2,532	Pass	0.97
SPDW-30307	12/13/2021	Ra-226	11.7 ± 0.4	12.3	8.6 - 16.0	Pass	0.95

a Liquid sample results are reported in pCi/Liter, air filters (pCi/m3), charcoal (pCi/charcoal canister), and solid samples (pCi/kg).
 b Laboratory codes: W & SPW (Water), MI (milk), AP (air filter), SO (soil), VE (vegetation), CH (charcoal canister), F (fish), U (urine).
 c Results are based on single determinations.
 d Acceptance criteria are listed in Attachment A of this report.

TABLE A-4. Intralaboratory "Blank" Samples

					Concentration ^a	
Lab Code ^b	Sample	Date	Analysis ^c	Laborator	y results (4.66σ)	Acceptance
	Туре			LLD	Activity ^d	Criteria (4.66 σ)
ODIA 54	147.1	4/0/0004		450	04 : 77	000
SPW-54	Water	1/8/2021	H-3	153	24 ± 77	200
SPDW-61	Water	1/11/2021	Gr. Alpha	0.56	-0.32 ± 0.37	2
SPDW-61	Water	1/11/2021	Gr. Beta	0.73	-0.11 ± 0.49	4
SPW-130	Water	1/19/2021	Sr-89	0.66	-0.12 ± 0.49	5
SPW-130	Water	1/19/2021	Sr-90	0.68	-0.02 ± 0.31	1
SPW-132	Water	1/19/2021	H-3	165	38 ± 79	200
SPW-4923	Water	1/26/2021	I-131	0.28	0.26 ± 0.16	1
SPW-187	Water	1/18/2021	Ra-228	1.44	0.81 ± 0.76	2
SPW-235	Water	1/26/2021	Ra-228	1.54	0.94 ± 0.82	2
SPW-254	Water	2/2/2021	I-131	0.29	-0.06 ± 0.13	1
SPW-304	Water	2/5/2021	H-3	159	6 ± 74	200
SPW-371	Water	2/12/2021	H-3	154	-37 ± 70	200
SPW-525	Water	3/5/2021	H-3	160	97 ± 80	200
SPW-691	Water	3/19/2021	H-3	158	-38 ± 71	200
SPW-693	Water	1/4/2021	Ra-226	0.03	-0.01 ± 0.01	2
SPW-799	Water	3/30/2021	Ra-228	1.03	0.06 ± 0.48	2
01 11 100	Water	0/00/2021	11a 220	1.00	0.00 ± 0.40	_
SPW-809	Water	3/19/2021	Ra-226	0.04	0.01 ± 0.03	2
SPDW-30102	Water	3/31/2021	Ra-226	0.03	0.00 ± 0.03	2
SPW-811	Water	4/1/2021	H-3	158	-29 ± 77	200
SPW-918	Water	4/7/2021	H-3	156	93 ± 79	200
SPW-943	Water	4/9/2021	Gr. Alpha	0.39	-0.08 ± 0.27	2
SPW-943	Water	4/9/2021	Gr. Beta	0.73	0.04 ± 0.51	4
SPW-1047	Water	4/15/2021	H-3	160	-51 ± 74	200
SPW-1249	Water	4/30/2021	H-3	158	109 ± 81	200
SPW-1372	Water	5/11/2021	Gr. Alpha	0.35	0.27 ± 0.27	2
SPW-1372	Water	5/11/2021	Gr. Beta	0.68	0.27 ± 0.49	4
SPW-1376	Water	5/11/2021	Sr-89	0.52	0.23 ± 0.39	5
SPW-1376	Water	5/11/2021	Sr-90	0.51	-0.06 ± 0.23	1
SPDW-30124	Water	5/13/2021	Ra-226	0.03	-0.02 ± 0.03	2
SPDW-30104	Water	5/26/2021	Ra-228	1.30	-0.04 ± 0.60	2
SPDW-30107		5/28/2021	H-3	157	33 ± 76	200
SPDW-30117	Water	6/4/2021	H-3	165	67 ± 91	200
SPMI-1671	water Milk	6/8/2021	п-з Sr-89	0.46	67 ± 81 0.23 ± 0.42	
SPMI-1671	Milk					5
SPDW-30159	Water	6/8/2021 6/11/2021	Sr-90 Ra-226	0.45 0.04	0.23 ± 0.24 -0.02 ± 0.04	1 2
SPDW-30128	Water	6/15/2021	H-3	161	17 ± 76	200
SPDW-30133	Water	6/17/2021	I-131	0.20	0.06 ± 0.12	1
SPDW-30134	Water	6/18/2021	Gr. Alpha	0.46	-0.11 ± 0.32	2
SPDW-30134	Water	6/18/2021	Gr. Beta	0.70	-0.10 ± 0.49	4
SPDW-30147	Water	6/25/2021	Ra-228	1.76	-0.15 ± 0.80	2

^a Liquid sample results are reported in pCi/Liter, air filters (pCi/m³), charcoal (pCi/charcoal canister), and solid samples (pCi/g).

^b Laboratory codes: W & SPW (Water), MI (milk), AP (air filter), SO (soil), VE (vegetation), CH (charcoal canister), F (fish), U (urine).

^c I-131(G); iodine-131 as analyzed by gamma spectroscopy.

^d Activity reported is a net activity result.

TABLE A-4. Intralaboratory "Blank" Samples

L			_		Concentration ^a	
Lab Code ^b	Sample	Date	Analysis ^c	Laborator	y results (4.66ஏ)	Acceptance
	Туре			LLD	Activity ^d	Criteria (4.66 σ)
SPDW-30205	Water	7/8/2021	Ra-226	0.03	0.02 ± 0.03	2
SPDW-3000	Water	7/29/2021	Ra-226	0.03	0.03 ± 0.03	2
0. 511 0000	· · · · · · · · · · · · · · · · · · ·	172072021	1 td 220	0.00	0.00 _ 0.00	_
SPDW-30223	Water	8/2/2021	Gr. Alpha	0.46	-0.13 ± 0.31	2
SPDW-30223	Water	8/2/2021	Gr. Beta	0.70	0.16 ± 0.49	4
SPDW-30225	Water	8/13/2021	H-3	161	-2 ± 75	200
SPDW-30230	Water	8/18/2021	Ra-228	1.02	0.47 ± 0.53	2
SPW-2782	Water	9/3/2021	Sr-89	0.60	-0.16 ± 0.48	5
SPW-2782	Water	9/3/2021	Sr-90	0.63	0.20 ± 0.32	1
SPDW-2784	Water	9/3/2021	H-3	157	-50 ± 69	200
SPDW-2890	Water	9/10/2021	H-3	163	-59 ± 72	200
SPDW-2981	Water	9/17/2021	H-3	162	11 ± 78	200
SPDW-3114	Water	9/17/2021	Ra-226	0.03	0.04 ± 0.03	2
SPDW-3035	Water	9/23/2021	Ra-228	1.15	0.10 ± 0.55	2
SPDW-3222	Water	9/28/2021	Ra-228	1.37	-0.30 ± 0.60	2
SPDW-3287	Water	9/29/2021	U-234	0.22	0.19 ± 0.23	1
SPDW-3287	Water	9/29/2021	U-238	0.38	-0.05 ± 0.21	1
SPDW-30275	Water	9/29/2021	Ra-226	0.05	0.03 ± 0.04	2
SPDW-3156	Water	10/1/2021	H-3	161	-11 ± 75	200
SPDW-3289	Water	10/12/2021	Gr. Alpha	0.40	0.21 ± 0.30	2
SPDW-3289	Water	10/12/2021	Gr. Beta	0.72	0.31 ± 0.52	4
SPDW-3392	Water	10/15/2021	H-3	158	58 ± 79	200
SPDW-3603	Water	10/28/2021	H-3	163	26 ± 77	200
SPDW-30282	Water	11/4/2021	Ra-226	0.04	0.04 ± 0.03	2
SPDW-3768	Water	11/10/2021	H-3	162	31 ± 77	200
SPDW-3859	Water	11/18/2021	H-3	162	45 ± 78	200
SPDW-30289	Water	11/22/2021	Ra-226	0.03	0.19 ± 0.03	2
SPDW-3957	Water	12/3/2021	H-3	161	118 ± 84	200
SPW-3970	Water	12/7/2021	Sr-89	0.54	-0.12 ± 0.43	5
SPW-3970	Water	12/7/2021	Sr-90	0.54	0.08 ± 0.26	1
SPDW-30286	Water	12/9/2021	Ra-228	0.91	-0.26 ± 0.39	2
SPDW-30288	Water	12/10/2021	I-131	0.31	0.00 ± 0.12	1
SPDW-30306	Water	12/13/2021	Ra-226	0.05	-0.05 ± 0.04	2
SPDW-30300	Water	12/16/2021	H-3	162	-33 ± 73	200
SPDW-30300	Water	12/30/2021	H-3	166	68 ± 91	200

^a Liquid sample results are reported in pCi/Liter, air filters (pCi/m³), charcoal (pCi/charcoal canister), and solid samples (pCi/g).

^b Laboratory codes : W & SPW (Water), MI (milk), AP (air filter), SO (soil), VE (vegetation), CH (charcoal canister), F (fish), U (urine).

^c I-131(G); iodine-131 as analyzed by gamma spectroscopy.

^d Activity reported is a net activity result.

TABLE A-5. Intralaboratory "Duplicate" Samples

				Concentration ^a		
					Averaged	
Lab Code ^b	Date	Analysis	First Result	Second Result	Result	Acceptance
S-20,21	1/5/2021	K-40	23.3 ± 0.6	22.6 ± 1.6	23.0 ± 0.9	Pass
XW-295,296	1/13/2021	H-3	245 ± 87	288 ± 89	267 ± 62	Pass
S-143,144	1/14/2021	K-40	7.47 ± 0.76	8.38 ± 0.22	7.93 ± 0.40	Pass
S-360,361	2/10/2021	K-40	9.23 ± 0.54	9.00 ± 0.68	9.12 ± 0.43	Pass
S-406,407	2/15/2021	K-40	2.92 ± 0.28	2.94 ± 0.94	2.93 ± 0.49	Pass
W-469,470	2/22/2021	Ra-226	0.75 ± 0.21	0.87 ± 0.22	0.81 ± 0.15	Pass
W-448,449	2/25/2021	Gr. Alpha	3.52 ± 1.84	3.72 ± 1.87	3.62 ± 1.31	Pass
W-448,449	2/25/2021	Gr. Beta	8.71 ± 1.36	8.91 ± 1.40	8.81 ± 0.98	Pass
W-448,449	2/25/2021	Ra-226	1.87 ± 0.25	1.82 ± 0.28	1.85 ± 0.19	Pass
W-448,449	2/25/2021	Ra-228	2.65 ± 1.26	2.53 ± 1.35	2.59 ± 0.92	Pass
P-511,512	3/2/2021	H-3	198 ± 85	202 ± 86	200 ± 60	Pass
WW-630,631	3/10/2021	H-3	144 ± 82	148 ± 82	146 ± 58	Pass
WW-743,744	3/16/2021	H-3	183 ± 85	167 ± 84	175 ± 60	Pass
S-785,786	3/25/2021	Pb-214	0.59 ± 0.08	0.34 ± 0.05	0.47 ± 0.05	Pass
S-785,786	3/25/2021	Ac-228	0.61 ± 0.12	0.58 ± 0.13	0.60 ± 0.09	Pass
AP-1052,1053	3/30/2021	Be-7	0.081 ± 0.010	0.075 ± 0.011	0.078 ± 0.007	Pass
AP-966,967	3/30/2021	Be-7	0.080 ± 0.010	0.085 ± 0.009	0.083 ± 0.007	Pass
SWU-835,836	3/30/2021	Gr. Beta	1.22 ± 0.56	1.27 ± 0.55	1.24 ± 0.39	Pass
AP-1204,1205	3/30/2021	Be-7	0.187 ± 0.102	0.160 ± 0.088	0.173 ± 0.067	Pass
AP-1029,1030	4/2/2021	Be-7	0.067 ± 0.012	0.079 ± 0.012	0.073 ± 0.009	Pass
SW-922,923	4/7/2021	H-3	440 ± 99	307 ± 93	373 ± 68	Pass
WW-987,988	4/12/2021	H-3	190 ± 87	284 ± 92	237 ± 63	Pass
F-1246,1247	4/22/2021	K-40	3.26 ± 0.66	2.83 ± 0.46	3.04 ± 0.40	Pass
SWT-1311,1312	4/27/2021	Gr. Beta	1.05 ± 0.52	1.16 ± 0.55	1.10 ± 0.38	Pass
WW-1401,1402	5/5/2021	Gr. Alpha	1.10 ± 1.00	2.50 ± 1.20	1.80 ± 0.78	Pass
WW-1401,1402	5/5/2021	K-40	126 ± 15	105 ± 30	115 ± 17	Pass
DW-30071.,30072	5/6/2021	Ra-226	0.98 ± 0.15	0.67 ± 0.13	0.83 ± 0.10	Pass
DW-30071.,30072	5/6/2021	Ra-228	0.83 ± 0.51	1.21 ± 0.54	1.02 ± 0.37	Pass
DW-30078,30079	5/10/2021	Gr. Alpha	4.90 ± 0.92	5.92 ± 0.99	5.41 ± 0.68	Pass
AP-051120A,B	5/11/2021	Gr. Beta	0.006 ± 0.002	0.005 ± 0.002	0.005 ± 0.002	Pass
DW-30083,30084	5/11/2021	Ra-226	0.34 ± 0.13	0.19 ± 0.20	0.27 ± 0.12	Pass
DW-30083,30084	5/11/2021	Ra-228	0.98 ± 0.60	0.15 ± 0.56	0.57 ± 0.41	Pass
S-1506,1507	5/18/2021	K-40	10.1 ± 0.8	14.9 ± 1.2	12.5 ± 0.7	Pass
DW-30092,30093	5/20/2021	Gr. Alpha	2.86 ± 0.85	2.40 ± 0.90	2.63 ± 0.62	Pass
DW-30095,30096	5/21/2021	Ra-226	1.18 ± 0.16	0.73 ± 0.15	0.96 ± 0.11	Pass
DW-30095,30096	5/21/2021	Ra-228	1.44 ± 0.63	0.61 ± 0.59	1.03 ± 0.43	Pass
AP-052521A,B	5/25/2021	Gr. Beta	0.021 ± 0.003	0.022 ± 0.003	0.021 ± 0.002	Pass
S-1589,1590	5/28/2021	Pb-214	1.16 ± 0.08	1.06 ± 0.09	1.11 ± 0.06	Pass
S-1589,1590	5/28/2021	Ac-228	1.17 ± 0.18	1.08 ± 0.14	1.13 ± 0.11	Pass

TABLE A-5. Intralaboratory "Duplicate" Samples

				Concentration ^a		
					Averaged	
Lab Code ^b	Date	Analysis	First Result	Second Result	Result	Acceptance
AD 060424A B	6/1/2021	Gr. Beta	0.015 ± 0.003	0.013 ± 0.003	0.014 + 0.002	Pass
AP-060121A,B DW-30113,30114	6/1/2021 6/1/2021	Ra-226	2.00 ± 0.34	2.64 ± 0.26	0.014 ± 0.002 2.32 ± 0.21	Pass
		Ra-228	2.50 ± 0.34 2.50 ± 0.78	3.13 ± 0.82	2.82 ± 0.57	Pass
DW-30113,30114	6/1/2021			3.13 ± 0.82 20.4 ± 0.8		Pass
PS-1631,1632 DW-30119,30120	6/2/2021	K-40	21.1 ± 0.8		20.7 ± 0.6	Pass
WW-1908,1909	6/3/2021 6/4/2021	Gr. Alpha H-3	1.18 ± 0.75	0.66 ± 0.64 176 ± 87	0.92 ± 0.49	Pass
•			150 ± 85		163 ± 61	Pass
VE-1717,1718	6/7/2021	Be-7	0.50 ± 0.19	0.38 ± 0.14	0.44 ± 0.12	Pass
VE-1717,1718	6/7/2021	K-40	5.26 ± 0.47	5.45 ± 0.44	5.35 ± 0.32	Pass
AP-060821A,B	6/8/2021	Gr. Beta	0.030 ± 0.004	0.028 ± 0.004	0.029 ± 0.003	Pass
AP-1822,1823	6/10/2021	Be-7	0.23 ± 0.12	0.22 ± 0.12	0.22 ± 0.08	
CF-1844,1845	6/14/2021	K-40	8.37 ± 0.44	8.33 ± 0.35	8.35 ± 0.28	Pass
AP-061521A,B	6/15/2021	Gr. Beta	0.020 ± 0.004	0.017 ± 0.003	0.019 ± 0.002	Pass
DW-30131,30132	6/17/2021	Ra-226	0.41 ± 0.21	0.34 ± 0.23	0.38 ± 0.16	Pass
DW-30131,30132	6/17/2021	Ra-228	0.42 ± 0.85	0.52 ± 0.74	0.47 ± 0.56	Pass
DW-30138,30139	6/17/2021	Gr. Alpha	1.59 ± 0.84	2.21 ± 0.95	1.90 ± 0.63	Pass
S-1929,1930	6/22/2021	K-40	19.4 ± 1.0	19.2 ± 1.1	19.3 ± 0.7	Pass
AP-062221A,B	6/22/2021	Gr. Beta	0.014 ± 0.003	0.012 ± 0.028	0.013 ± 0.014	Pass
DW-30150,30151	6/28/2021	Ra-226	0.53 ± 0.15	0.55 ± 0.19	0.54 ± 0.12	Pass
DW-30150,30151	6/28/2021	Ra-228	0.76 ± 0.54	0.52 ± 0.52	0.64 ± 0.37	Pass
AP-2160,2161	6/28/2021	Be-7	0.11 ± 0.01	0.11 ± 0.01	0.11 ± 0.01	Pass
DW-30150,30151	6/28/2021	Ra-226	0.53 ± 0.15	0.55 ± 0.19	0.54 ± 0.12	Pass
DW-30150,30151	6/28/2021	Ra-228	0.76 ± 0.54	0.52 ± 0.52	0.64 ± 0.37	Pass
AP-2218,2119	6/29/2021	Be-7	0.11 ± 0.01	0.12 ± 0.01	0.11 ± 0.01	Pass
AP-2235,2236	6/30/2021	Be-7	0.10 ± 0.01	0.11 ± 0.01	0.10 ± 0.01	Pass
CF-2139,2140	7/12/2021	Be-7	0.49 ± 0.12	0.65 ± 0.20	0.57 ± 0.12	Pass
CF-2139,2140	7/12/2021	K-40	8.25 ± 0.41	7.94 ± 0.46	8.10 ± 0.31	Pass
VE-2214,2215	7/12/2021	K-40	3.26 ± 0.11	3.41 ± 0.25	3.34 ± 0.14	Pass
DW-30169,30170	7/12/2021	Gr. Alpha	2.61 ± 0.87	2.09 ± 0.84	2.35 ± 0.60	Pass
DW-30169,30170	7/12/2021	Gr. Beta	2.09 ± 0.67	2.52 ± 0.60	2.31 ± 0.45	Pass
DW-30169,30170	7/12/2021	Ra-226	0.84 ± 0.24	0.82 ± 0.20	0.83 ± 0.16	Pass
DW-30169,30170	7/12/2021	Ra-228	0.80 ± 0.54	0.84 ± 0.50	0.82 ± 0.37	Pass
AP-71320,71321	7/13/2021	Gr. Beta	0.015 ± 0.003	0.010 ± 0.003	0.013 ± 0.002	Pass
XW-2424,2425	7/16/2021	H-3	193 ± 86	104 ± 81	149 ± 59	Pass
DW-30183,30184	7/19/2021	Ra-226	1.37 ± 0.18	1.21 ± 0.27	1.29 ± 0.16	Pass
DW-30183,30185	7/19/2021	Ra-228	1.51 ± 0.69	1.52 ± 0.68	1.52 ± 0.48	Pass
AP-71920,71921	7/19/2021	Gr. Beta	0.021 ± 0.004	0.020 ± 0.003	0.021 ± 0.002	Pass
*						Pass
S-2277,2278	7/20/2021	K-40	13.6 ± 0.9	12.3 ± 0.9	12.9 ± 0.6	Pass
DW-30191,30192	7/20/2021	Gr. Alpha	3.88 ± 0.94	3.66 ± 94.00	3.77 ± 47.00	Pass
SG-2382,2383	7/23/2021	Pb-214	1.88 ± 0.21	1.94 ± 0.21	1.91 ± 0.15	
SG-2382,2383	7/23/2021	Ac-228	1.69 ± 0.28	1.96 ± 0.33	1.83 ± 0.22	Pass
DW-30207,30208	7/26/2021	Gr. Alpha	5.47 ± 1.29	5.20 ± 1.24	5.34 ± 0.89	Pass
DW-30207,30208	7/26/2021	Gr. Beta	5.89 ± 0.77	6.11 ± 0.73	6.00 ± 0.53	Pass

TABLE A-5. Intralaboratory "Duplicate" Samples

				Concentration ^a		
					Averaged	
Lab Code ^b	Date	Analysis	First Result	Second Result	Result	Acceptance
DW-30210,30211	7/28/2021	Ra-226	0.48 ± 0.13	0.62 ± 0.11	0.55 ± 0.09	Pass
DW-30210,30211	7/28/2021	Ra-228	0.45 ± 0.53	0.73 ± 0.65	0.59 ± 0.42	Pass
S-2509,2510	8/1/2021	K-40	14.2 ± 0.5	13.7 ± 1.0	14.0 ± 0.6	Pass
S-2509,2510	8/1/2021	Be-7	7.27 ± 0.29	7.97 ± 0.69	7.62 ± 0.37	Pass
DW-30221,30222	8/6/2021	Gr. Alpha	2.19 ± 1.55	2.08 ± 1.54	2.14 ± 1.09	Pass
DW-30221,30222	8/6/2021	Gr. Beta	1.19 ± 1.04	2.76 ± 1.08	1.98 ± 0.75	Pass
DW-30221,30222	8/6/2021	Ra-226	2.00 ± 0.22	1.58 ± 0.26	1.79 ± 0.17	Pass
DW-30221,30222	8/6/2021	Ra-228	1.69 ± 0.56	1.75 ± 0.54	1.72 ± 0.39	Pass
VE-2551,2552	8/11/2021	K-40	2.68 ± 0.20	2.61 ± 0.27	2.64 ± 0.17	Pass
VE-2551,2552	8/11/2021	Be-7	0.16 ± 0.08	0.18 ± 0.08	0.17 ± 0.05	Pass
AP-2578,2579	8/12/2021	Be-7	0.18 ± 0.09	0.20 ± 0.11	0.19 ± 0.07	Pass
AP-082421A,B	8/24/2021	Gr. Beta	0.032 ± 0.004	0.028 ± 0.004	0.030 ± 0.003	Pass
AP-083121A,B	8/24/2021	Gr. Beta	0.027 ± 0.004	0.029 ± 0.004	0.028 ± 0.003	Pass
VE-2684,2685	8/25/2021	K-40	2.15 ± 0.26	1.92 ± 0.27	2.03 ± 0.19	Pass
VE-2684,2685	8/25/2021	Be-7	0.20 ± 0.10	0.26 ± 0.11	0.23 ± 0.07	Pass
VE-2728,2729	8/25/2021	K-40	2.34 ± 0.41	2.27 ± 0.40	2.31 ± 0.29	Pass
DW-30238,30239	8/25/2021	Gr. Alpha	3.94 ± 0.91	2.43 ± 0.86	3.185 ± 0.63	Pass
DW-30238,30239	8/25/2021	Ra-226	2.57 ± 0.24	1.83 ± 0.24	2.20 ± 0.17	Pass
DW-30238,30239	8/25/2021	Ra-228	2.86 ± 0.83	2.52 ± 0.66	2.69 ± 0.17	Pass
SW-2641,2642	8/31/2021	H-3	289 ± 92	310 ± 93	300 ± 65	Pass
VE-2858,2859	9/2/2021	K-40	8.36 ± 0.41	8.02 ± 0.47	8.19 ± 0.31	Pass
SG-2934,2935	9/13/2021	Pb-214	2.72 ± 0.22	2.54 ± 0.27	2.63 ± 0.17	Pass
SG-2934,2935	9/13/2021	Ac-228	3.16 ± 0.39	3.22 ± 0.58	3.19 ± 0.35	Pass
DW-30249,30250	9/17/2021	Ra-226	0.70 ± 0.18	1.00 ± 0.17	0.85 ± 0.12	Pass
S-3042,3043	9/17/2021	K-40	7.55 ± 0.80	7.57 ± 0.81	7.56 ± 0.57	Pass
DW-30249,30250	9/17/2021	Ra-226	0.70 ± 0.18	1.00 ± 0.17	0.85 ± 0.12	Pass
S-3042,3043	9/22/2021	Ka-220 K-40	7.55 ± 0.80	7.57 ± 0.81	7.56 ± 0.12	Pass
DW-30256,30257	10/8/2021	Gr. Alpha	2.35 ± 0.79	2.71 ± 0.92	2.53 ± 0.61	Pass
S-3279,3280	10/11/2021	K-40	10.08 ± 0.58	9.18 ± 0.53	9.63 ± 0.39	Pass
DW-30262,30263	10/14/2021	Ra-226	1.49 ± 0.30	1.51 ± 0.17	1.50 ± 0.17	Pass
DW-30262,30263	10/14/2021	Ra-228	1.16 ± 0.79	2.08 ± 0.82	1.62 ± 0.57	Pass
AP-102521A,B	10/25/2021	Gr. Beta	0.026 ± 0.005	0.030 ± 0.010	0.028 ± 0.010	Pass
XWW-3707,3708	10/27/2021	H-3	206 ± 87	268 ± 90	237 ± 63	Pass
AP-110121A,B	11/1/2021	Gr. Beta	0.017 ± 0.004	0.016 ± 0.00	0.016 ± 0.003	Pass
DW-30277,30278	11/5/2021	Gr. Alpha	10.11 ± 1.19	9.72 ± 1.11	9.92 ± 0.81	Pass
DW-30277,30278	11/5/2021	Gr .Beta	5.53 ± 0.72	4.22 ± 0.69	4.88 ± 0.50	Pass
DW-30277,30278	11/5/2021	Ra-226	6.27 ± 0.32	6.34 ± 0.37	6.31 ± 0.25	Pass
DW-30277,30278	11/5/2021	Ra-228	3.10 ± 0.86	3.76 ± 0.90	3.43 ± 0.62	Pass
AP-111521A,B	11/15/2021	Gr. Beta	0.022 ± 0.004	0.026 ± 0.005	0.024 ± 0.003	Pass
AP-112221A,B	11/22/2021	Gr. Beta	0.023 ± 0.004	0.025 ± 0.005	0.024 ± 0.003	Pass
AP-112921A,B	11/29/2021	Gr. Beta	0.038 ± 0.005	0.035 ± 0.005	0.037 ± 0.004	Pass

TABLE A-5. Intralaboratory "Duplicate" Samples

				Concentration ^a		
					Averaged	
Lab Code ^b	Date	Analysis	First Result	Second Result	Result	Acceptance
DW-30297,8	12/15/2021	Ra-226	1.71 ± 0.15	1.21 ± 0.13	1.46 ± 0.10	Pass
DW-30297,8	12/15/2021	Ra-228	2.44 ± 0.98	1.96 ± 0.97	2.20 ± 0.69	Pass
S-4182,4183	12/19/2021	Pb-214	1.19 ± 0.06	1.07 ± 0.08	1.13 ± 0.05	Pass
S-4182,4183	12/19/2021	Ac-228	1.08 ± 0.11	1.15 ± 0.14	1.12 ± 0.09	Pass
S-4182,4183	12/19/2021	K-40	1.75 ± 0.74	1.80 ± 0.84	1.78 ± 0.56	Pass
AP-122721A,B	12/27/2021	Gr. Beta	0.063 ± 0.006	0.060 ± 0.006	0.062 ± 0.004	Pass
AP-4350,4351	12/28/2021	Be-7	0.06 ± 0.02	0.06 ± 0.02	0.06 ± 0.01	Pass
AP-4845,4846	12/31/2021	Be-7	0.07 ± 0.01	0.06 ± 0.02	0.06 ± 0.01	Pass

Note: Duplicate analyses are performed on every twentieth sample received. Results are not listed for those analyses with activities that measure below the LLD.

^a Results are reported in units of pCi/L, except for air filters (pCi/Filter or pCi/m3), food products, vegetation, soil and sediment (pCi/q).

AP (Air Particulate), AV (Aquatic Vegetation), BS (Bottom Sediment), CF (Cattle Feed), CH (Charcoal Canister), DW (Drinking Water), E (Egg), F (Fish), G (Grass), LW (Lake Water), MI (Milk), P (Precipitation), PM (Powdered Milk), S (Solid), SG (Sludge), SO (Soil), SS (Shoreline Sediment), SW (Surface Water), SWT (Surface Water Treated), SWU (Surface Water Untreated), VE (Vegetation), W (Water), WW (Well Water).

TABLE A-6. Department of Energy's Mixed Analyte Performance Evaluation Program (MAPEP).

		Concentration ⁶	1	
9		Known	Control	
Analysis	Laboratory result	Activity	Limits ^c	Acceptance
<u>, </u>	,	,		
Gross Alpha	1.30 ± 0.08	1.77	0.53 - 3.01	Pass
Gross Beta	0.81 ± 0.04	0.649	0.325 - 0.974	Pass
Gross Alpha	0.73 ± 0.06	0.87	0.26 - 1.48	Pass
Gross Beta	2.38 ± 0.06	2.50	1.25 - 3.75	Pass
			_	
Cs-134	-2.57 ± 2.21	0	NA ^c	Pass
Cs-137	1700 ± 20	1550	1085 - 2015	Pass
Co-57	977 ± 7	920	644 - 1196	Pass
Co-60	1360 ± 10	1370	959 - 1781	Pass
Mn-54	0.91 ± 2.85	0	NA ^c	Pass
Zn-65	687 - 17	604	423 - 785	Pass
K-40	682 ± 53	618	433 - 803	Pass
Cs-134	10.5 ± 0.3	11.5	8.1 - 15.0	Pass
Cs-137	8.53 ± 0.32	7.9	5.5 - 10.3	Pass
Co-57	12.2 ± 0.3	11.4	8.0 - 14.8	Pass
Co-60	0.03 ± 0.05	0	NA ^c	Pass
Mn-54	16.5 ± 0.4	15.5	10.9 - 20.2	Pass
Zn-65	11.5 ± 0.5	10.5	7.40 - 13.7	Pass
K-40	9.93 ± 1.42	0	NA ^c	Fail ^d
Cs-134	1.54 ± 0.06	2.14	1.50 - 2.78	Pass
Cs-137	-0.011 ± 0.020	0	NA ^c	Pass
Co-57	0.636 ± 0.042	0.69	0.480 - 0.892	Pass
Co-60	-0.64 ± 0.02	0	NA ^c	Fail ^e
Mn-54	0.312 ± 0.058	0.312	0.218 - 0.406	Pass
Zn-65	0.41 ± 0.07	0.352	0.246 - 0.458	Pass
0- 404	2.72 + 0.00	0.00	0.50 4.70	D
Cs-134	3.73 ± 0.09	3.60	2.50 - 4.70	Pass
Cs-137	5.69 ± 0.10	4.69	3.28 - 6.10	Pass
Co-57	6.23 ± 0.07	5.05	3.54 - 6.57	Pass
Co-60	3.29 ± 0.06	2.99	2.09 - 3.89	Pass
Mn-54	6.17 ± 0.16	5.25	3.68 - 6.83	Pass
Zn-65	-0.04 ± 0.08	0	NA ^c	Pass
Gross Alpha	0.45 + 0.04	0.060	0 288 ₋ 1 632	Pass
				Pass
GIUSS DEIA	U.1 I I U.U4	0.000	0.211 - 0.030	F d55
Gross Alpha	0.19 ± 0.03	0.232	0.070 - 0.394	Pass
Gross Beta				Pass
	Gross Alpha Gross Beta Gross Alpha	Gross Alpha 0.45 ± 0.04 Gross Beta 0.71 ± 0.04 Gross Alpha 0.19 ± 0.03	Gross Alpha 0.45 ± 0.04 0.960 Gross Beta 0.71 ± 0.04 0.553 Gross Alpha 0.19 ± 0.03 0.232	Gross Alpha 0.45 ± 0.04 0.960 0.288 - 1.632 Gross Beta 0.71 ± 0.04 0.553 0.277 - 0.830 Gross Alpha 0.19 ± 0.03 0.232 0.070 - 0.394

TABLE A-6. Department of Energy's Mixed Analyte Performance Evaluation Program (MAPEP).

				Concentration	a	
	Reference			Known	Control	
Lab Code ^b	Date	Analysis	Laboratory result	Activity	Limits ^c	Acceptance
MASO-3004	8/1/2021	Cs-134	1035 ± 10	1170	819 - 1521	Pass
MASO-3004	8/1/2021	Cs-137	628 ± 11	572	400 - 744	Pass
MASO-3004	8/1/2021	Co-57	-0.11 ± 1.26	0	NA ^c	Pass
MASO-3004	8/1/2021	Co-60	720 ± 7	722	714 - 1326	Pass
MASO-3004	8/1/2021	Mn-54	456 ± 11	410	287 - 533	Pass
MASO-3004	8/1/2021	Zn-65	1002 ± 22	907	635 - 1179	Pass
MASO-3004	8/1/2021	K-40	663 ± 50	607	425 - 789	Pass
MADW-3003	8/1/2021	Ra-226	0.32 ± 0.06	0.226	0.158 - 0.294	Fail [†]
MADW-3003	8/1/2021	Sr-90	3.63 ± 0.16	3.9	2.70 - 5.02	Pass
MADW-3003	8/1/2021	U-234	0.02 ± 0.01	0.02	NA ^g	Pass
MADW-3003	8/1/2021	U-238	0.02 ± 0.01	0.01	NA ^g	Pass

^a Results are reported in units of Bq/kg (soil), Bq/L (water) or Bq/total sample (filters, vegetation).

^b Laboratory codes as follows: MAW (water), MADW (water), MAAP (air filter), MASO (soil) and MAVE (vegetation).

^c MAPEP results are presented as the known values and expected laboratory precision (1 sigma, 1 determination) and control limits as defined by the MAPEP. A known value of "zero" indicates an analysis was included in the testing series as a "false positive". MAPEP does not provide control limits.

 $^{^{\}rm d}$ The sample spectrum was reanalyzed utilizing the minimum data point background width method. The result was 1.59 \pm 1.77 Bq/L which satisfies MAPEP criteria for a false positive test.

^e A decimal was misplaced in one of two cobalt-60 results while calculating a mean result causing MAPEP to fail the result as a statistically significant negative value at 3 standard deviations. The correct mean result (-0.0004 ± 0.0186) is not a statistically significant negative value and would not have failed.

f Radium result did not meet MAPEP acceptance criteria.

⁹ Provided in the series for "sensitivity evaluation". MAPEP does not provide control limits.

TABLE A-7. Interlaboratory Comparison Crosscheck Program, Environmental Resource Associates (ERA)^a.

MRAD-30 Study

			WIIOLD	oo otaay		
			Concentratio	n ^a		
Lab Code ^b	Date	Analysis	Laboratory Result	ERA Value ^c	Control Limits ^d	Acceptance
ERAP-722	3/22/2021	Cs-134	898	1030	668 - 1260	Pass
ERAP-722	3/22/2021	Cs-137	181	163	134 - 214	Pass
ERAP-722	3/22/2021	Co-60	1270	1220	1040 - 1550	Pass
ERAP-722	3/22/2021	Mn-54	< 4.3	< 50.0	0.00 - 50.0	Pass
ERAP-722	3/22/2021	Zn-65	908	771	632 - 1180	Pass
ERAP-722	3/22/2021	Sr-90	184	189	120 - 257	Pass
ERAP-724	3/22/2021	Gross Alpha	88.4	96.1	50.2 - 158	Pass
ERAP-724	3/22/2021	Gross Beta	74.1	62.6	38.0 - 94.6	Pass

^a Results obtained by Environmental, Inc., Midwest Laboratory (EIML) as a participant in the crosscheck program for proficiency testing administered by Environmental Resource Associates, serving as a replacement for studies conducted previously by the Environmental Measurements Laboratory Quality Assessment Program (EML).

^b Laboratory code ERAP (air filter). Results are reported in units of (pCi/Filter).

^c The ERA Assigned values for the air filter standards are equal to 100% of the parameter present in the standard as determined by the gravimetric and/or volumetric measurements made during standard preparation as applicable.

^d The acceptance limits are established per the guidelines contained in the Department of Energy (DOE) report EML-564, Analysis of Environmental Measurements Laboratory (EML) Quality Assessment Program (QAP) Data Determination of Operational Criteria and Control Limits for Performance Evaluation Purposes or ERA's SOP for the generation of Performance Acceptance Limits.



Appendix B

Data Reporting Conventions

APPENDIX B. DATA REPORTING CONVENTIONS

Data Reporting Conventions

1.0. All activities, except gross alpha and gross beta, are decay corrected to collection time or the end of the collection period.

2.0. Single Measurements

Each single measurement is reported as follows:

 $x \pm s$

where.

x = value of the measurement;

s = 2σ counting uncertainty (corresponding to the 95% confidence level).

In cases where the activity is less than the lower limit of detection L, it is reported as: < L, where L = the lower limit of detection based on 4.66σ uncertainty for a background sample.

3.0. Duplicate analyses

If duplicate analyses are reported, the convention is as follows. :

3.1 <u>Individual results:</u> For two analysis results; $x_1 \pm s_1$ and $x_2 \pm s_2$

Reported result: $x \pm s$; where $x = (1/2)(x_1 + x_2)$ and $s = (1/2)\sqrt{s_1^2 + s_2^2}$

3.2. Individual results: $\langle L_1, \langle L_2 \rangle$ Reported result: $\langle L_1, \langle L_2 \rangle$ Reported result: $\langle L_1, \langle L_2 \rangle$

3.3. Individual results: $x \pm s$, < L Reported result: $x \pm s$ if $x \ge L$; < L otherwise.

4.0. Computation of Averages and Standard Deviations

4.1 Averages and standard deviations listed in the tables are computed from all of the individual measurements over the period averaged; for example, an annual standard deviation would not be the average of quarterly standard deviations. The average \bar{x} and standard deviation "s" of a set of n numbers x_1, x_2, \dots, x_n are defined as follows:

$$\bar{x} = \frac{1}{n} \sum x$$
 $s = \sqrt{\frac{\sum (x - \bar{x})^2}{n-1}}$

- 4.2 Values below the highest lower limit of detection are not included in the average.
- 4.3 If all values in the averaging group are less than the highest LLD, the highest LLD is reported.
- 4.4 If all but one of the values are less than the highest LLD, the single value x and associated two sigma error is reported.
- 4.5 In rounding off, the following rules are followed:
 - 4.5.1. If the number following those to be retained is less than 5, the number is dropped, and the retained numbers are kept unchanged. As an example, 11.443 is rounded off to 11.44.
 - 4.5.2. If the number following those to be retained is equal to or greater than 5, the number is dropped and the last retained number is raised by 1. As an example, 11.445 is rounded off to 11.45.



Appendix C

Maximum permissible concentrations of radioactivity in air and water above natural background in unrestricted areas

APPENDIX C

Table C-1. Maximum permissible concentrations of radioactivity in air and water above natural background in unrestricted areas a.

	Air (pCi/m ³)	Water (pCi	i/L)
Gross alpha	1 x 10 ⁻³	Strontium-89	8,000
Gross beta	1	Strontium-90	500
lodine-131 ^b	2.8 x 10 ⁻¹	Cesium-137	1,000
		Barium-140	8,000
		lodine-131	1,000
		Potassium-40 °	4,000
		Gross alpha	2
		Gross beta	10
		Tritium	1 x 10 ⁶

Taken from Table 2 of Appendix B to Code of Federal Regulations Title 10, Part 20, and appropriate footnotes. Concentrations may be averaged over a period not greater than one year.


Value adjusted by a factor of 700 to reduce the dose resulting from the air-grass-cow-milk-child pathway.

A natural radionuclide.

APPENDIX D

Sample Collection and Analysis Program

TLD LOCATIONS ONE MILE RADIUS

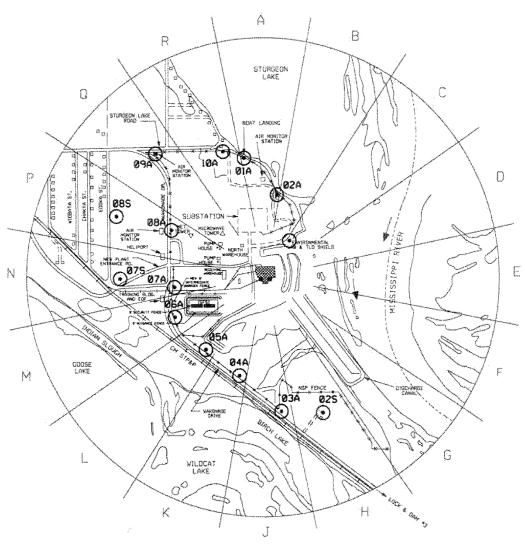


PLANT AREA ENLARGED PLAN [1.00 MILE RADIUS]
[NO SCALE]


MONITORING LEGEND:

O PRAIRIE ISLAND TLD POINTS

TLD LOCATIONS

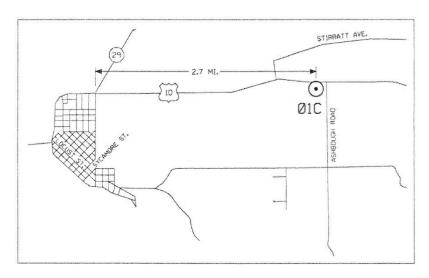

CONTROL POINTS
PRESCOTT, WISCONSIN

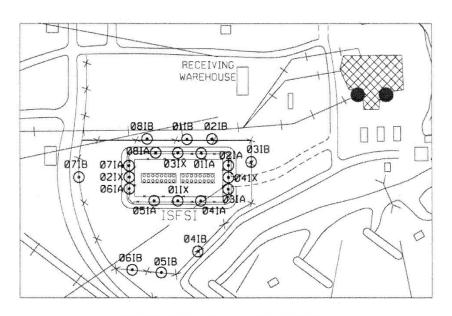


ISFSI AREA TLD LOCATIONS

MONITORING LEGEND:

• PRAIRIE ISLAND TLD POINTS


TLD LOCATIONS
FIVE MILE RADIUS

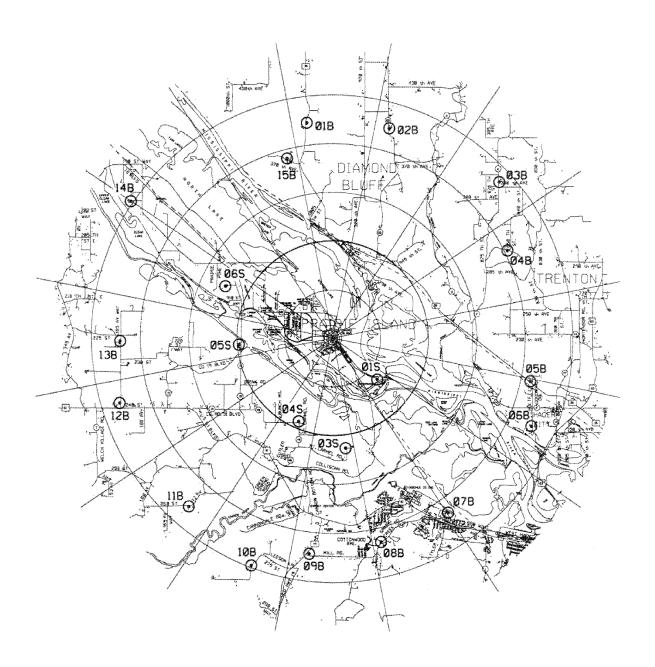

MONITORING LEGEND:

• PRAIRIE ISLAND TLD POINTS

ENVIRONMENTAL SAMPLING POINTS ONE MILE RADIUS

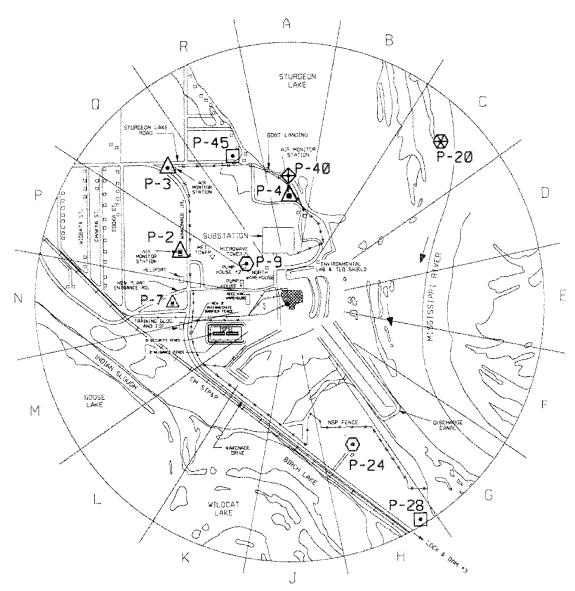

PLANT AREA ENLARGED PLAN [1.00 MILE RADIUS] [NO SCALE]

MONITORING LEGEND

AIR SAMPLING POINT ID NUMBERS P-1, P-2, P-3, P-4, P-6, P-7

water sampling point ID Numbers P-5, P-6, P-8, P-9, P-11, P-24, P-43


VEGETATION / VEGETABLES ID NUMBERS P-28. P-38. P-45

FISH SAMPLING POINT ID NUMBERS P-13, P-19

INVERTEBRATES POINT ID NUMBERS P-6. P-40

SEDIMENT SAMPLING POINT ID NUMBERS P-6, P-12, P-20


ENVIRONMENTAL SAMPLING POINTS FIVE MILE RADIUS

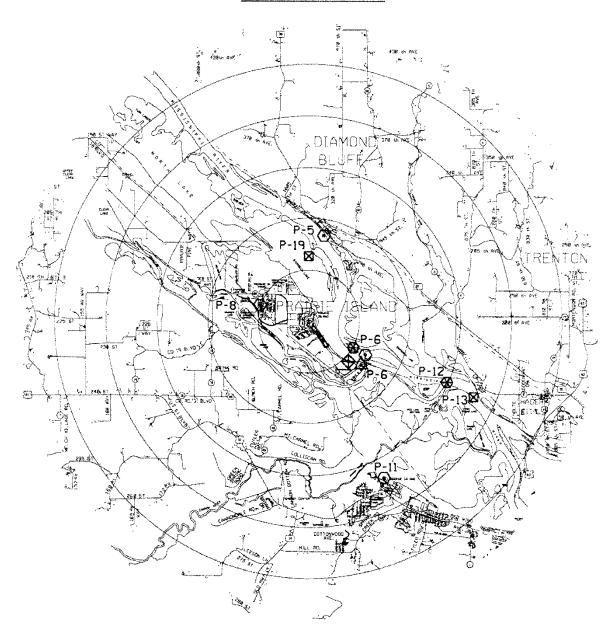

MONITORING LEGEND

- AIR SAMPLING POINT ID NUMBERS P-1, P-2, P-3, P-4, P-6, P-7
- * WATER SAMPLING POINT ID NUMBERS P-5, P-6, P-8, P-9, P-11, P-24, P-43
- VEGETATION / VEGETABLES ID NUMBERS P-28, P-38, P-45
- FISH SAMPLING POINT ID NUMBERS P-13, P-19
- INVERTEBRATES POINT ID NUMBERS P-6. P-40
- SEDIMENT SAMPLING POINT ID NUMBERS P-6, P-12, P-20

ENVIRONMENTAL SAMPLING POINTS

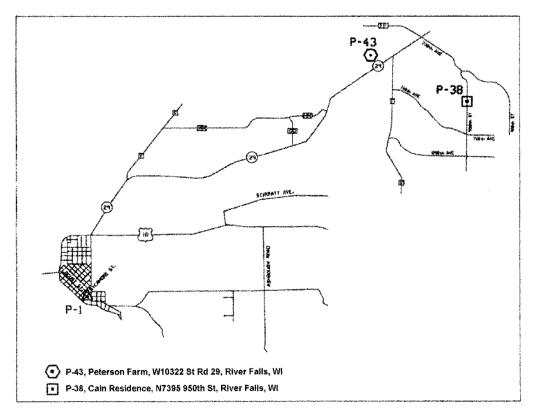

CONTROL POINTS PRESCOTT, WISCONSIN

MONITORING LEGEND



AIR SAMPLING POINT ID NUMBERS P-1, P-2, P-3, P-4, P-6, P-7

WATER SAMPLING POINT ID NUMBERS P-6, P-6, P-8, P-9, P-11, P-43 (·)

VEGETATION / VEGETABLES ID NUMBERS P-28, P-38, P-45 $oldsymbol{\cdot}$

APPENDIX E

Special Well and

Surface Water Samples

1.0 INTRODUCTION

This appendix to the Radiological Environmental Monitoring Program Annual Report to the United States Nuclear Regulatory Commission summarizes and interprets results of the special well and surface water samples taken at the Prairie Island Nuclear Generating Plant, Red Wing, Minnesota, during the period January - December, 2021. This supplemental special sampling program was established in December of 1989 when higher than expected levels of tritium were detected in a nearby residence well sample.

Tabulations of the special sampling program individual analyses made during the year are included in this appendix. A summary table of tritium analyses is also included in this appendix.

2.0 SUMMARY

This special sampling program was established following the detection of tritium in a residence well water sample south of the PINGP during 1989. This program is described and the results for 2021 are summarized and discussed.

Program findings for 2021 detected low levels of tritium in nearby residence wells, ground water, surface samples, and storage tanks at or near the expected natural background levels with the exception of ground water sample well MW-8, parking lot runoff, D5/D6 tank vaults, and the septic system. The 2021 sample results (except for MW-8, parking lot runoff, D5/D6 tank vaults, and the septic system) ranged from <19 pCi/L to 183 pCi/L. Sample well MW-8 ranged from 127 pCi/L to 675 pCi/L. Parking lot runoff ranged from 51 to 390 pCi/L. D5 tank vault was 1314 pCi/L. D6 tank vault was 1537 pCi/L. The septic system ranged from 24 to 927 pCi/L. All tritium results are far below the Environmental Protection Agency's drinking water standard of 20,000 pCi/L and present no harm to any members of the public.

None of the water samples monitored for gamma-emitting isotopes showed any activity greater than the LLD.

3.0 Special Tritium Sampling Program

3.1 Program Design and Data Interpretation

The purpose of this sampling program is to assess the impact of any tritium leaching into the environment (ground water system) from the PINGP. For this purpose, special water samples are collected and analyzed for tritium content.

3.2 Program Description

The sampling and analysis schedule for the special water sampling program is summarized in Table E-4.1 and briefly reviewed below. Table E-4.2 defines the additional sample locations and codes for the special water sampling program.

Special well, tank, and surface water samples were collected quarterly (spring, summer, fall) at seven locations, quarterly at one location, monthly at six locations, semi-annually at six locations, and annually at thirty-eight locations. The Peterson (P-43) and Hanson (SW-1) farm wells are used as control locations for these special samples.

To detect low levels of tritium at or below natural background levels, analyses of the samples have been contracted to a laboratory (University of Waterloo Laboratories) capable of detecting tritium concentrations down to 19 pCi/L. Waterloo Laboratories report tritium analyses results in Tritium Units (1 TU = 3.2 pCi/L). The tritium results in this report are indicated in pCi/L.

3.3 Program Execution

The special water sampling was executed as described in the preceding section.

3.4 Program Modifications

Changes to the program in 2021 include:

- Samples taken from monitoring wells P-10 and MW-8 were sent to Environmental Incorporated for hard-to-detect nuclide analysis in accordance with American Nuclear Insurers recommendation
- samples were taken from the D5/D6 Fuel Oil Storage Tank vaults because these areas were accessible in 2021
- an extra sample of well MW-5 was taken in May
- an extra sample of well PZ-7 was taken in November
- well SW-6 was not available for sampling

3.5 Results and Discussion

Results show tritium in well water and ground water samples at or near expected natural background levels except the MW-8 ground water sample well. Table E-4.4 provides the complete data table of results for each period and sampling location.

The tritium level annual averages have shown a downward trend since the special sampling began in 1989.

Except for sample well MW-8, parking lot runoff, D5/D6 tank vaults, and the septic system, the 2021 sample results are within the range of expected background tritium levels in shallow ground water and surface water due to tritium concentrations measured in precipitation. Sampling points in North America have shown tritium concentrations in precipitation ranging from 5 pCi/L to 157 pCi/L (Environmental Isotope Data No. 10; World Survey of Isotope Concentration in Precipitation (1988-1991)).

The higher-level results at the Suter residence and Birch Lake in 1989 were possibly due to seepage from the PINGP discharge canal water into the ground water. This is thought to occur due to the elevation difference between the Vermillion River and the discharge canal. The Suter residence is located between the discharge canal and Birch Lake, which connects to the Vermillion River. The PINGP discharge canal piping was lengthened during 1991, so that liquid discharges from the plant are released near the end of the discharge canal, diffused and discharged to the Mississippi River. In 1992, the underground liquid discharge pipe from the plant to the discharge canal piping was replaced with a double walled leak detectable piping system. This year's sample results continue to indicate that these modifications have eliminated the suspected radioactive effluent flow into the local ground water.

The elevated tritium levels in sample well MW-8 in 2021 may be due to prior leakage from the PINGP liquid radwaste discharge pipe, discharge of turbine building sump water into the landlocked area, or discharge of heating steam condensate from the main warehouse in 1978/1979. The liquid radwaste discharge pipe was replaced in 1992 and the discharge to the landlocked area has been terminated, the last discharge took place on 11/14/09. The main warehouse heating system was repaired in 1979. The heating steam system has not been used in the outer plant buildings since the 2011 – 2012 heating season. On 8/24/21, blank flanges were installed in the heating system piping to isolate steam and steam condensate from buildings located outside the Auxiliary Building, Turbine Building, and Radwaste Building.

The elevated tritium levels in the parking lot runoff and D5/D6 tank vaults are most likely due to tritium recaptured from effluent releases by precipitation. The levels found in the septic system have returned to background levels.

None of the water samples monitored for gamma-emitting isotopes showed any activity greater than the LLD.

Table E-4.1. Sample collection and analysis program for special well, storage tank, and surface water samples, Prairie Island Nuclear Generating Plant, 2021.

Medium	No.	Location codes and type ^a	Collection type and frequency ^b	Analysis type ^c
Well water Annual	25	P-8 post-treat, P-8 pre-treat, REMP P-6, REMP P-11, PIIC-22, PIIC-26, PIIC-28, PIIC-29, P-7, P-9, P-11, PZ-1, PZ-2, PZ-4, PZ-5, PZ-7, MW-6, P-26, P-30, SW-3, SW-4, SW-5, SW-7, SW-8, SW-9	G/A	H-3
Well water quarterly	1	P-24D	G/Q	H-3
Well water quarterly'	7	P-2, P-3, P-5, P-6, PZ-8, MW-4, MW-5	G/Q'	H-3
Well water monthly	5	P-43(C), SW-1(C), MW-7, MW-8, P-10	G/M	H-3
Surface water	8	S-1, S-2, S-3, S-4, S-5, S-6, S-7, P-31	G/A ^d	H-3
Storage Tank	5	11 CST, 21 CST, 22 CST, U1/2 Demin Hdr	G/S	H-3
Storage Tank	2	D5 and D6 tank vaults	G/A	H-3
Storage Tank	1	Septic System	G/M	H-3
Snow	5	S-6, S-7, S-8, S-9, P-43(C)	G/A	H-3

^a Location codes are defined in table D-4.2. Control Stations are indicated by (C). All other stations are indicators.

^b Collection type is codes as follows: G/ = grab. Collection frequency is coded as follows: M = monthly; Q = quarterly; Q' = quarterly (spring, summer, and fall); S= semiannually; A = annually.

^c Analysis type is coded as follows: H-3 = tritium.

^d Location S-6 and S-7 are sampled semi-annually, P-31 is sampled three times a year

Table E-4.2. Sampling locations for special well, storage tank, and surface water samples, Prairie Island Nuclear Generating Plant, 2021.

Code	Collection site	Type of sample ^a	Distance and direction from reactor
P-8	PI Community well post treat	DW	1.0 mi. @ 321°/WNW
P-8	PI Community well pre treat	DW	1.0 mi. @ 321°/WNW
REMP P-6	Lock & Dam #3 well	DW	1.6 mi. @ 129°/SE
REMP P-11	Red Wing Service Center	DW	3.3 mi @ 158°/SSE
PIIC-22	1773 Buffalo Slough Rd	DW	1 mi. @ 315°/NW
PIIC-26	1771 Buffalo Slough Rd	DW	1 mi. @ 315°/NW
PIIC-29	Buffalo Project	DW	4.3 mi @ 302°/WNW
P-24D	Suter residence	DW	0.6 mi. @ 158°/SSE
P-43	Peterson Farm (Control)	DW	13.9 mi. @ 355°/N
SW-1	Hanson Farm (Control)	DW	2.2 mi. @ 315°/NW
P-2	Sample well	ww	See map
P-3	Sample well	ww	See map
P-5	Sample well	ww	See map
P-6	Sample well	ww	See map
P-7	Sample well	ww	See map
P-10	Sample well	ww	See map
P-11	Sample well	ww	See map
PZ-1	Sample well	ww	See map
PZ-2	Sample well	ww	See map
PZ-4	Sample well	ww	See map
PZ-5	Sample well	ww	See map
PZ-7	Sample well	ww	See map
PZ-8	Sample well	ww	See map
MW-4	Sample well	ww	See map
MW-5	Sample well	ww	See map
MW-6	Sample well	ww	See map
MW-7	Sample well	ww	See map
MW-8	Sample well	ww	See map
P-26	PITC well	DW	0.4 mi. @ 258°/WSW
P-30	Environ lab well	DW	0.2 mi. @ 32°/NNE

Table E-4.2. Sampling locations for special well, storage tank, and surface water samples, Prairie Island Nuclear Generating Plant, 2021 (continued).

Code	Collection site	Type of sample ^a	Distance and direction from reactor
SW-3	Cooling Tower pump	WW	See map
SW-4	New Admin Bldg	DW	0.05 mi. @ 315°/NW
SW-5	Plant Screenhouse well	WW	0.05 mi. @ 0°/N
SW-6	SGR Building	DW	0.2 mi @ 310°/NW
SW-7	Distribution Center	DW	0.35 mi @ 271°/W
SW-8	Site Admin Building well	WW	0.2 mi @ 310°/NW
SW-9	FLEX Building	WW	0.2 mi @ 238°/WSW
P-9	Plant well # 2	DW	0.3 mi. @ 306°/NW
S-1	Upstream Miss. River	SW	See map
S-2	Recirc/Intake canal	SW	See map
S-3	Cooling water canal	SW	See map
S-4	Discharge Canal (end)	SW	See map
S-5	Mid Discharge Canal	SW	See map
S-6	Roof Stormwater Runoff (also snow)	SW	0.05 mi. @ 0°/N
S-7	Parking Lot Stormwater (also snow)	SW	0.3 mi @ 306°/NW
S-8	P-10 area snow	SW	See map
S-9	MW-7/8 area snow	SW	See map
P-31	Birch Lake Seepage	SW	0.69 mi. @ 172°/S
11 CST	Storage Tank	ST	Turbine Building
21 CST	Storage Tank	ST	Turbine Building
22 CST	Storage Tank	ST	Turbine Building
Unit 1/2 demin hdr	Storage Tank	ST	Turbine Building
Septic System	Storage Tank	ST	Outside #1 Warehouse
D5 Vault	Concrete Vault	ST	Outside Turbine Bldg
D6 Vault	Concrete Vault	ST	Outside Turbine Bldg

^a Sample codes: DW = Drinking Water: WW = Well Water; SW = Surface Water: ST = Storage Tank.
Table E-4.3 Radiation Environmental Monitoring Program Summary: Special well, storage tank, and surface water samples.

Table E-4.3 Radiological Environmental Monitoring Program Summary: Special well, storage tank, and surface water samples

Name of Facility Prairie Island Nuclear Power Station Docket No. 50-282, 50-306 Location of Facility Goodhue, Minnesota Reporting Period January - December, 2021 (County, State)

Sample Type (Units)	Type Numb Analys	er of	LLD b	Indicator Locations Mean (F) ^c Range ^c	Location w Annua Location ^d	ith Highest I Mean Mean (F) ^c Range ^c	Control Locations Mean (F) ^c Range ^c	Number Non- Routine Results ^e
Offsite Well Water (pCi/L)	H-3	13	19	29 (5/13) (21-40)	P-24D	32 (3/5) (26-40)	(See Control Below)	0
Onsite Well Water (pCi/L)	H-3	76	19	138 (58/76) (19-675)	MW-8	400 (12/12) (127-675)	(See Control Below)	7
Onsite Surface Water (pCi/L)	H-3	16	19	92 (11/16) (20-390)	S-7	220 (2/3) (51-390)	(See Control Below)	0
Onsite Storage Tank (pCi/L)	H-3	24	19	257 (19/24) (22-1537)	D-6 Fuel Oil Storage Tank Vault	1537 (1/1) (1537)	(See Control Below)	3
Control (offsite well water)	H-3	24	19	none	P-43	42 (4/12) (22-60)	35 (6/24) (20-60)	0
Control (offsite snow)	H-3	1	19	none	P-43	64 (1/1) (64)	64 (1/1) (64)	0

^a H-3 = tritium

b LLD = Nominal lower limit of detection based on 4.66 sigma error for background sample. Value shown is lowest for the period.
c Mean and range are based on detectable measurements only. Fraction of detectable measurements at specified locations is indicated in parentheses (F).

d Locations are specified by code.
Non-routine results are those which exceed ten times the control station mean value.

Table E-4.4 Radiological Environmental Monitoring Program , Complete Data Table, 2021.

	SAMPLE DATES	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ОСТ	NOV	DEC
		2021	2021	2021	2021	2021	2021	2021	2021	2021	2021	2021	2021
CODE	SAMPLE LOCATIONS	pCi/L	pCi/L	pCi/L	pCi/L	pCi/L	pCi/L	pCi/L	pCi/L	pCi/L	pCi/L	pCi/L	pCi/L
	OFFSITE WELLS												
P-8 Post-treat	PI Comm. Well							<19					
P-8 Pre-treat	PI Comm. Well							<19					
REMP P-6	Lock & Dam #3 well							<19					
REMP P-11	Red Wing Service Center							<19					
PIIC-22	1773 Buffalo Slough Rd							<19					
PIIC-26	1771 Buffalo Slough Rd							21					
PIIC-28	1960 Larson Lane							<19					
PIIC-29	Buffalo Project							28					
P-24D	Suter residence		29			40		<19	<19			26	
P-43	Peterson Farm (Control	28	60/ 64* *snow	57	<19	22	<19	<19	<19	<19	<19	<19	<19
SW-1	Hanson Farm (Control)	24	20	<19	<19	<19	<19	<19	<19	<19	<19	<19	<19

Table E-4.4 Radiological Environmental Monitoring Program, Complete Data Table, 2021 (continued).

	SAMPLE DATES	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ост	NOV	DEC
		2021	2021	2021	2021	2021	2021	2021	2021	2021	2021	2021	2021
CODE	SAMPLE LOCATIONS	pCi/L											
	ONSITE WELLS												
P-2	Sample well				99			110				90	
P-3	Sample well				<19			59				<19	
P-5	Sample well				50			71				81	
P-6	Sample well				21			31				<19	
P-7	Sample well							63					
P-10	Sample well	132	67	160	142	81	77	95	50	28	79	54	50
P-11	Sample well							44					
PZ-1	Sample well							39					
PZ-2	Sample well							<19					
PZ-4	Sample well							34					
PZ-5	Sample well							62					
PZ-7	Sample well							<19				<19	
PZ-8	Sample well				56			61				27	
MW-4	Sample well				<19			22				<19	
MW-5	Sample well				21	<19		19				44	
MW-6	Sample well							<19					
MW-7	Sample well	110	84	29	<19	134	102	90	98	106	103	88	59
MW-8	Sample well	618	431	232	127	675	562	355	160	335	530	539	242
P-26	PITC well							23					
P-30	Env. lab well							<19					
SW-3	CT pump							<19					
P-9	Plant well # 2							<19					
SW-4	New Admin							<19					
SW-5	Plnt Scrnhs							35					
SW-7	Dist Center							<19					

Table E-4.4 Radiological Environmental Monitoring Program , Complete Data Table, 2021 (continued).

	· · · · · · · · · · · · · · · · · · ·					· · · · · · · · · · · · · · · · · · ·	_ `						
	SAMPLE DATES	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ОСТ	NOV	DEC
		2021	2021	2021	2021	2021	2021	2021	2021	2021	2021	2021	2021
CODE	SAMPLE LOCATIONS	pCi/L	pCi/L	pCi/L	pCi/L	pCi/L	pCi/L	pCi/L	pCi/L	pCi/L	pCi/L	pCi/L	pCi/L
	ONSITE WELLS												
SW-8	Site Admin Bldg							<19					
SW-9	FLEX Bldg							<19					

Table E-4.4 Radiological Environmental Monitoring Program , Complete Data Table, 2021 (continued).

	SAMPLE DATES	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ОСТ	NOV	DEC
		2021	2021	2021	2021	2021	2021	2021	2021	2021	2021	2021	2021
CODE	SAMPLE LOCATIONS	pCi/L											
	ONSITE SURFACE WATER												
S-1	Mississippi River upstream							<19					
S-2	Recirculation/Intake canal							25					
S-3	Cooling water canal							<19					
S-4	Discharge Canal (end)							<19					
S-5	Discharge Canal (midway)							29					
S-6	Stormwater runoff		73*	45							67		
S-7	Parking Lot runoff		51*	<19							390		
S-8	P-10 area snow		108*										
S-9	MW-7/8 area snow		183*										
P-31	Birch Lake Seepage		<19					20				28	

^{*} snow samples


Table E-4.4 Radiological Environmental Monitoring Program , Complete Data Table, 2021 (continued).

	SAMPLE DATES	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ОСТ	NOV	DEC
		2021	2021	2021	2021	2021	2021	2021	2021	2021	2021	2021	2021
CODE	SAMPLE LOCATIONS	pCi/L	pCi/L	pCi/L	pCi/L	pCi/L	pCi/L	pCi/L	pCi/L	pCi/L	pCi/L	pCi/L	pCi/L
	ONSITE STORAGE TANKS												
11 CST	Storage tank				59						29		
21 CST	Storage tank				<19						35		
22 CST	Storage tank				<19						<19		
U1/U2 Demin Header	Storage tank				<19/ 78						<19/ 22		
Septic System	Storage tank	36	109	76	34	138	75	140	78	34	927	132	24
D5	D5 Fuel Oil Storage Tank Vault								1314				
D6	D6 Fuel Oil Storage Tank Vault							1537					

Table E-4.5. Supplementary Data Tables, results of the analyses for Fe-55, Ni-63, Sr-90, Pu-238, Pu-239/240, Am-241, Cm-242 and Cm-243/244 on two samples.

Location	P-10	MW-8
Collection Date	04-14-21	04-14-21
Lab Code	PXW-1196	PXW-1197
lastana	Concentrati	io (Ci/1.)
Isotope	Concentrati	ion (μCi/mL)
Fe-55	< 6.1 E-07	< 5.9 E-07
Ni-63	< 7.0 E-08	< 7.0 E-08
Sr-90	< 4.4 E-10	< 4.5 E-10
Pu-238	< 3.0 E-10	< 3.2 E-10
Pu-239/240	< 3.0 E-10	< 3.2 E-10
Am-241	< 3.0 E-10	< 1.7 E-10
Cm-242	< 1.3 E-10	< 2.1 E-10
Cm-243/244	< 1.3 E-10	< 1.2 E-10

Less than (<), value is based on a 4.66 sigma counting error for the background sample. Analytical results relate only to the samples submitted to the Laboratory for testing, in the condition received by the laboratory.

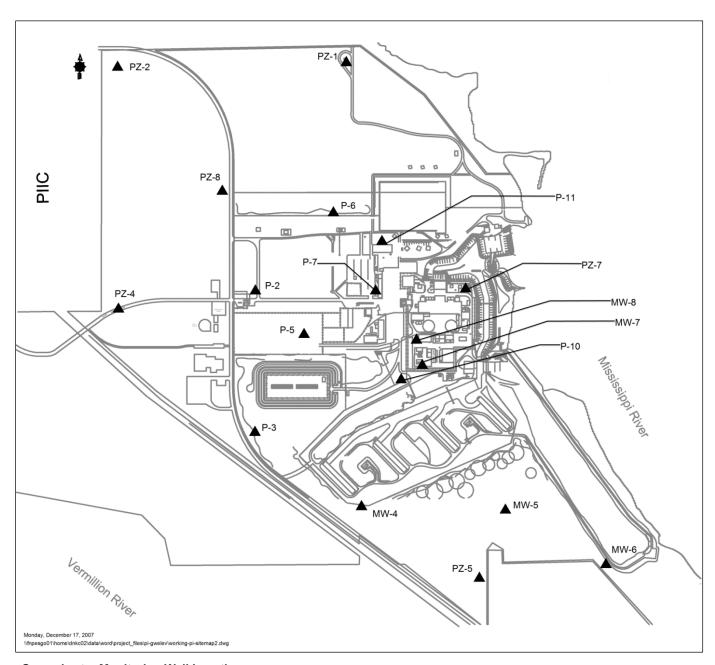

Groundwater Monitoring Well Locations