



SEABROOK STATION  
UPDATED FINAL SAFETY  
ANALYSIS REPORT


Seabrook Site – 50 Mile Radius Regional Climatological  
Data Stations

Figure 2.3-1

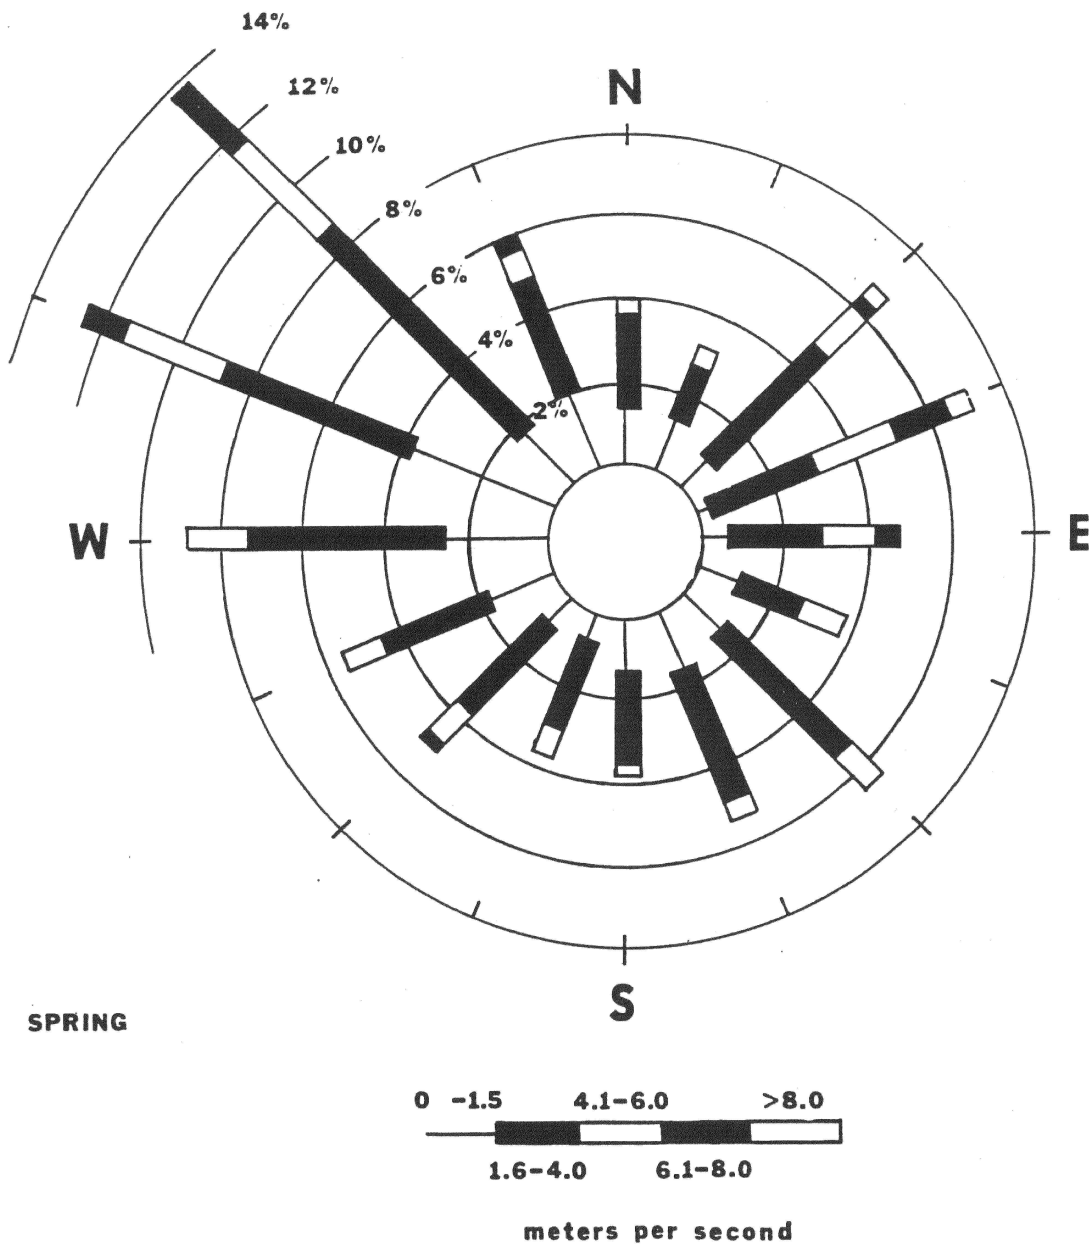


SEABROOK STATION UPDATED FINAL SAFETY ANALYSIS REPORT	Spring Wind Rose for the 30 ft. Level (March 1972 – May 1972)	
		Figure 2.3-2

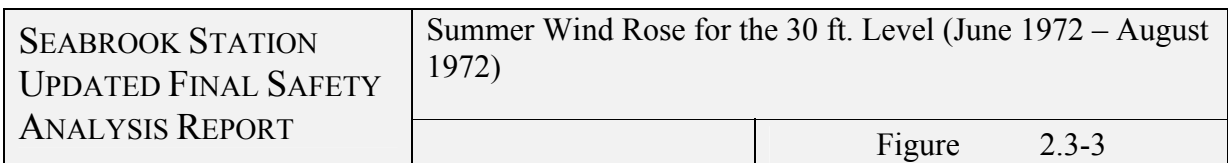

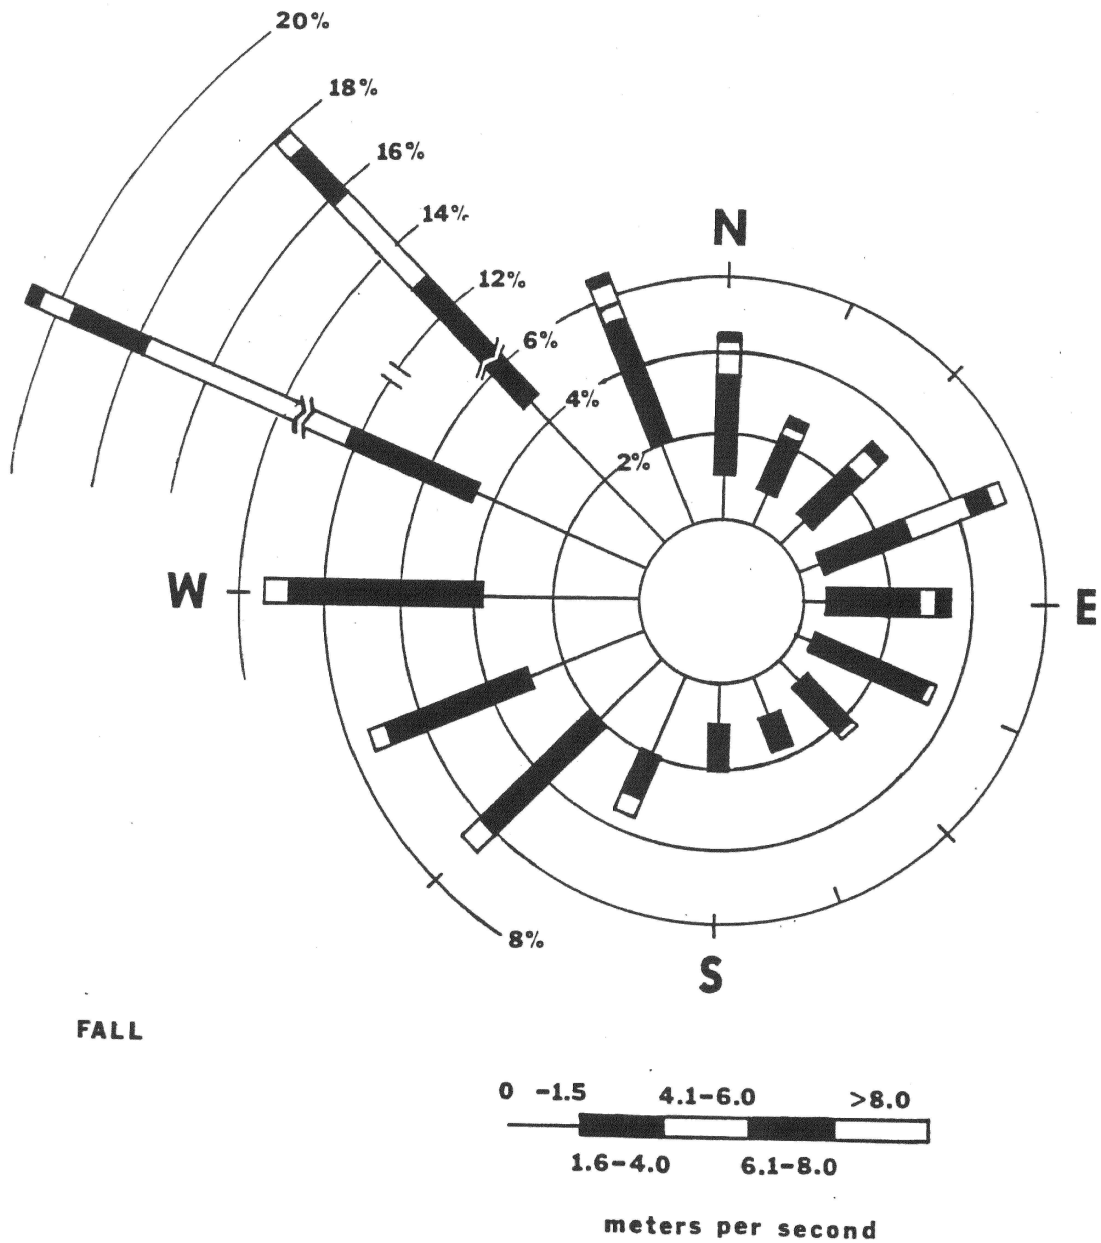


SEABROOK STATION UPDATED FINAL SAFETY ANALYSIS REPORT	Fall Wind Rose for the 30 ft. Level (November 1971 and September, October 1972)	
		Figure 2.3-4



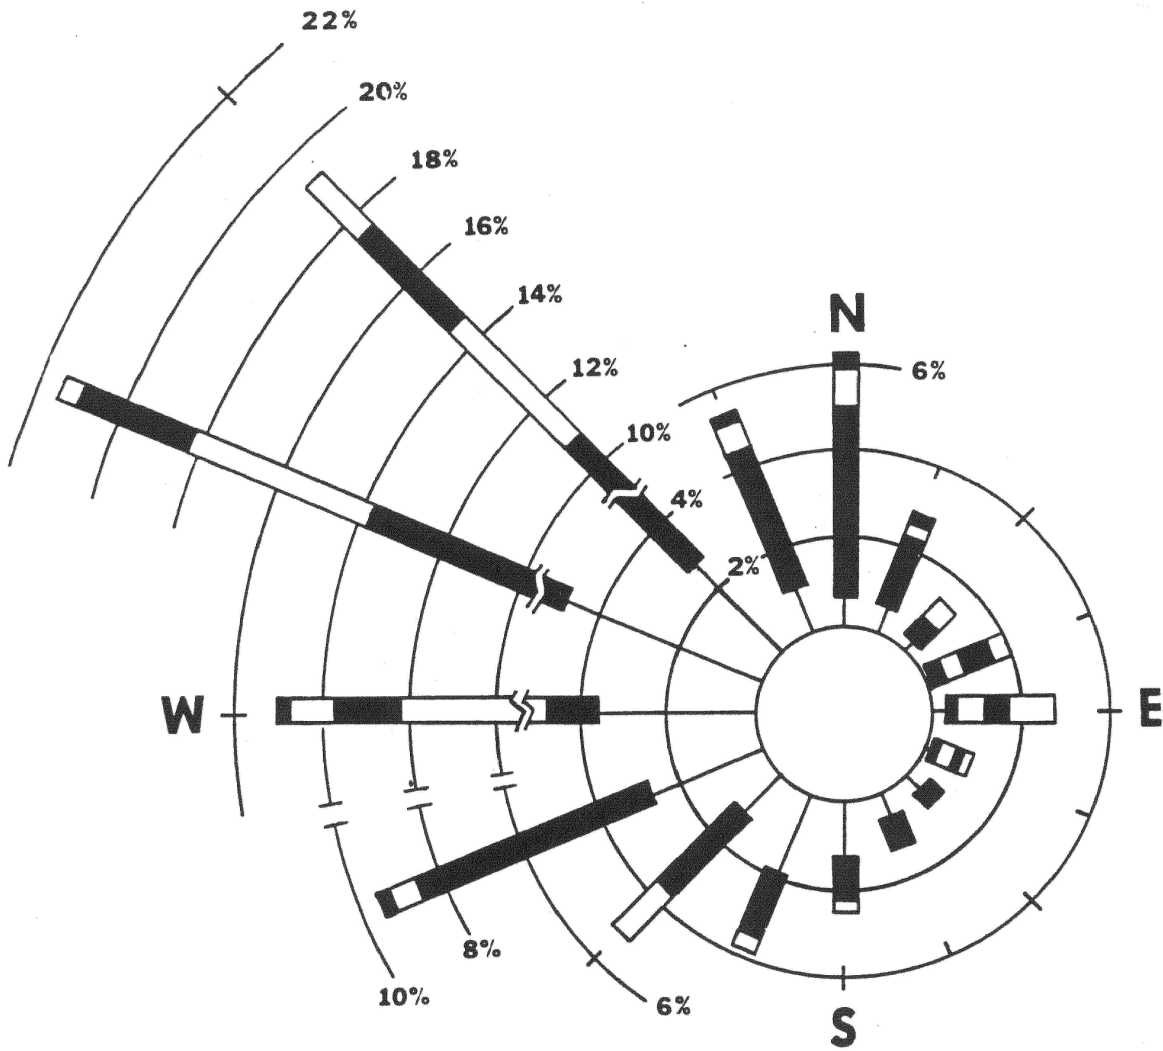

**WINTER**

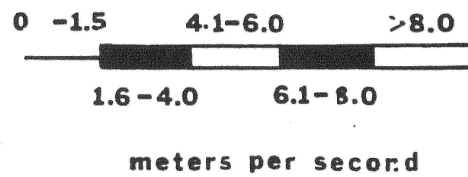

SEABROOK STATION  
UPDATED FINAL SAFETY  
ANALYSIS REPORT

Winter Wind Rose for the 30 ft. Level (December 1971 – February 1972)

Figure 2.3-5







SEABROOK STATION  
UPDATED FINAL SAFETY  
ANALYSIS REPORT

Topographic Map within a Five Mile Radius of the Seabrook  
Site


Figure 2.3-7

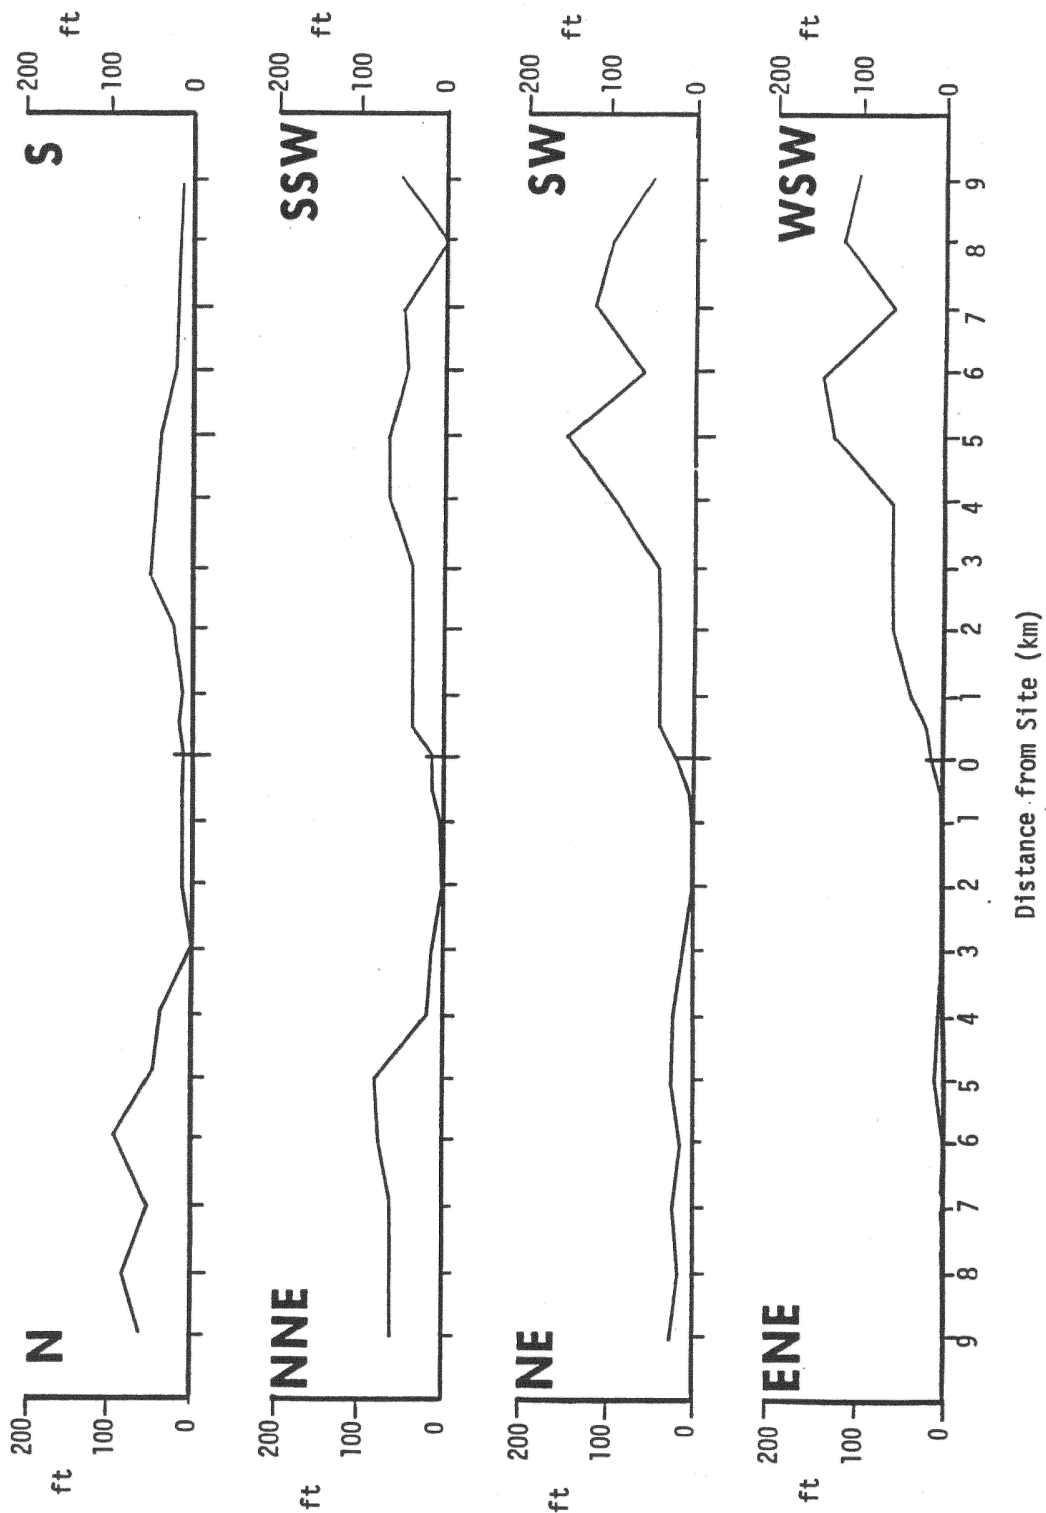

SEABROOK STATION UPDATED FINAL SAFETY ANALYSIS REPORT	Terrain Cross Section [2 Sheets]	
	Figure	2.3-8, Sh. 1 of 2

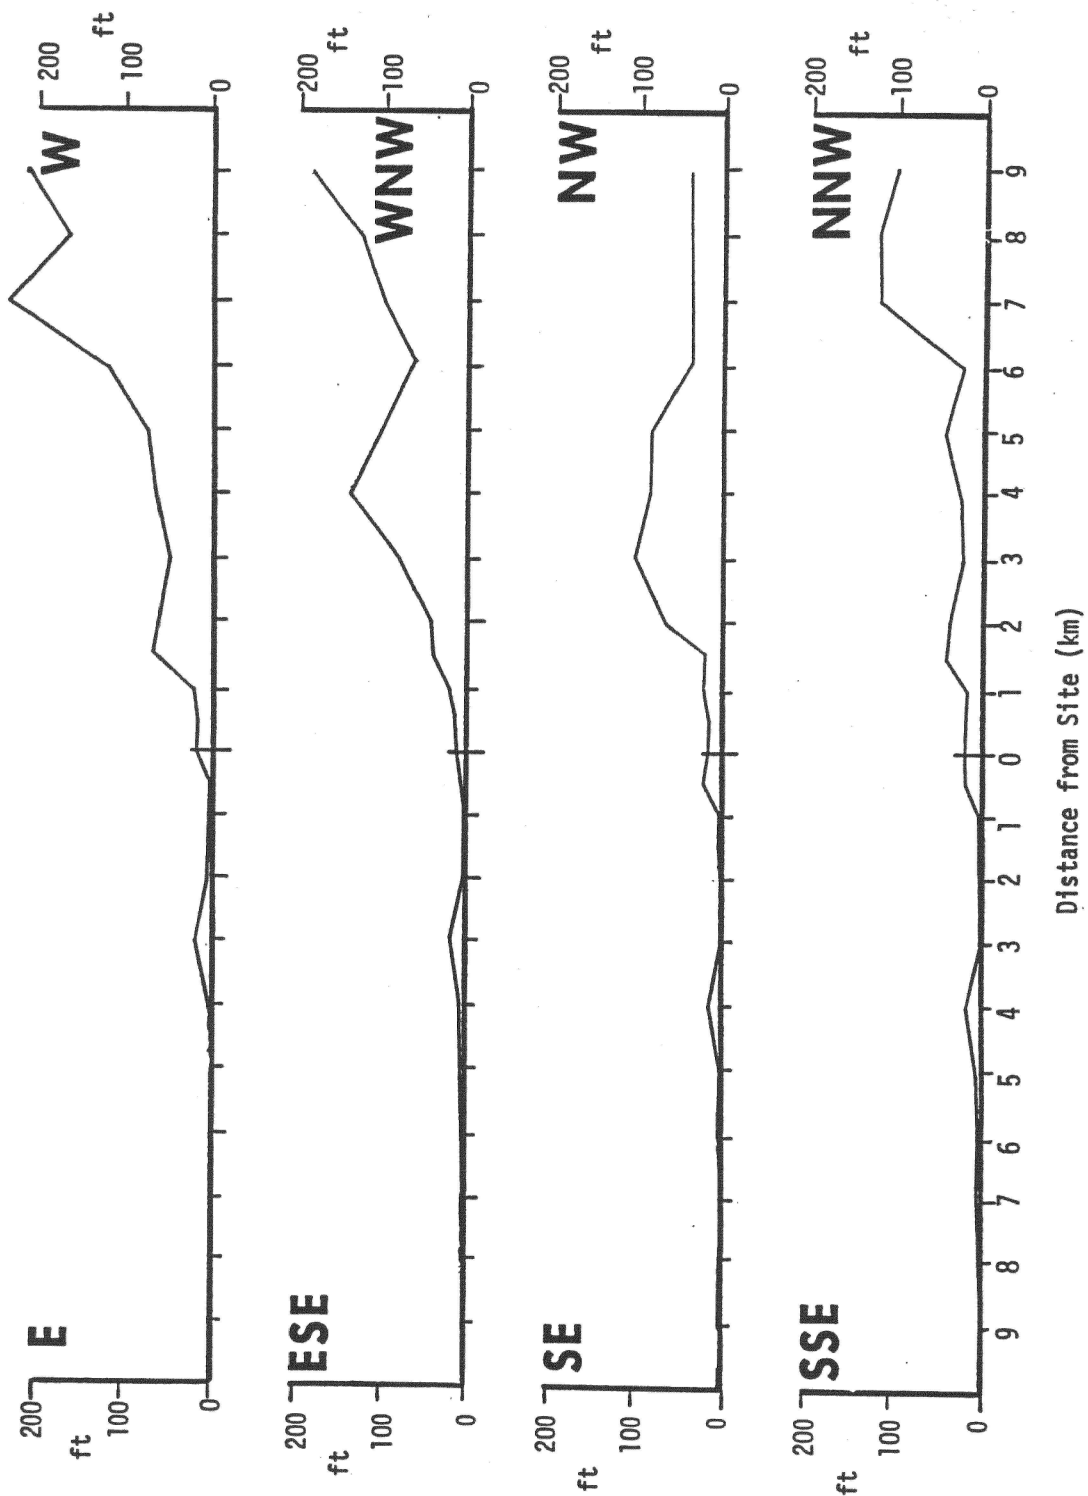


SEABROOK STATION UPDATED FINAL SAFETY ANALYSIS REPORT	Terrain Cross Section [2 Sheets]	
		Figure 2.3-8, Sh. 2 of 2

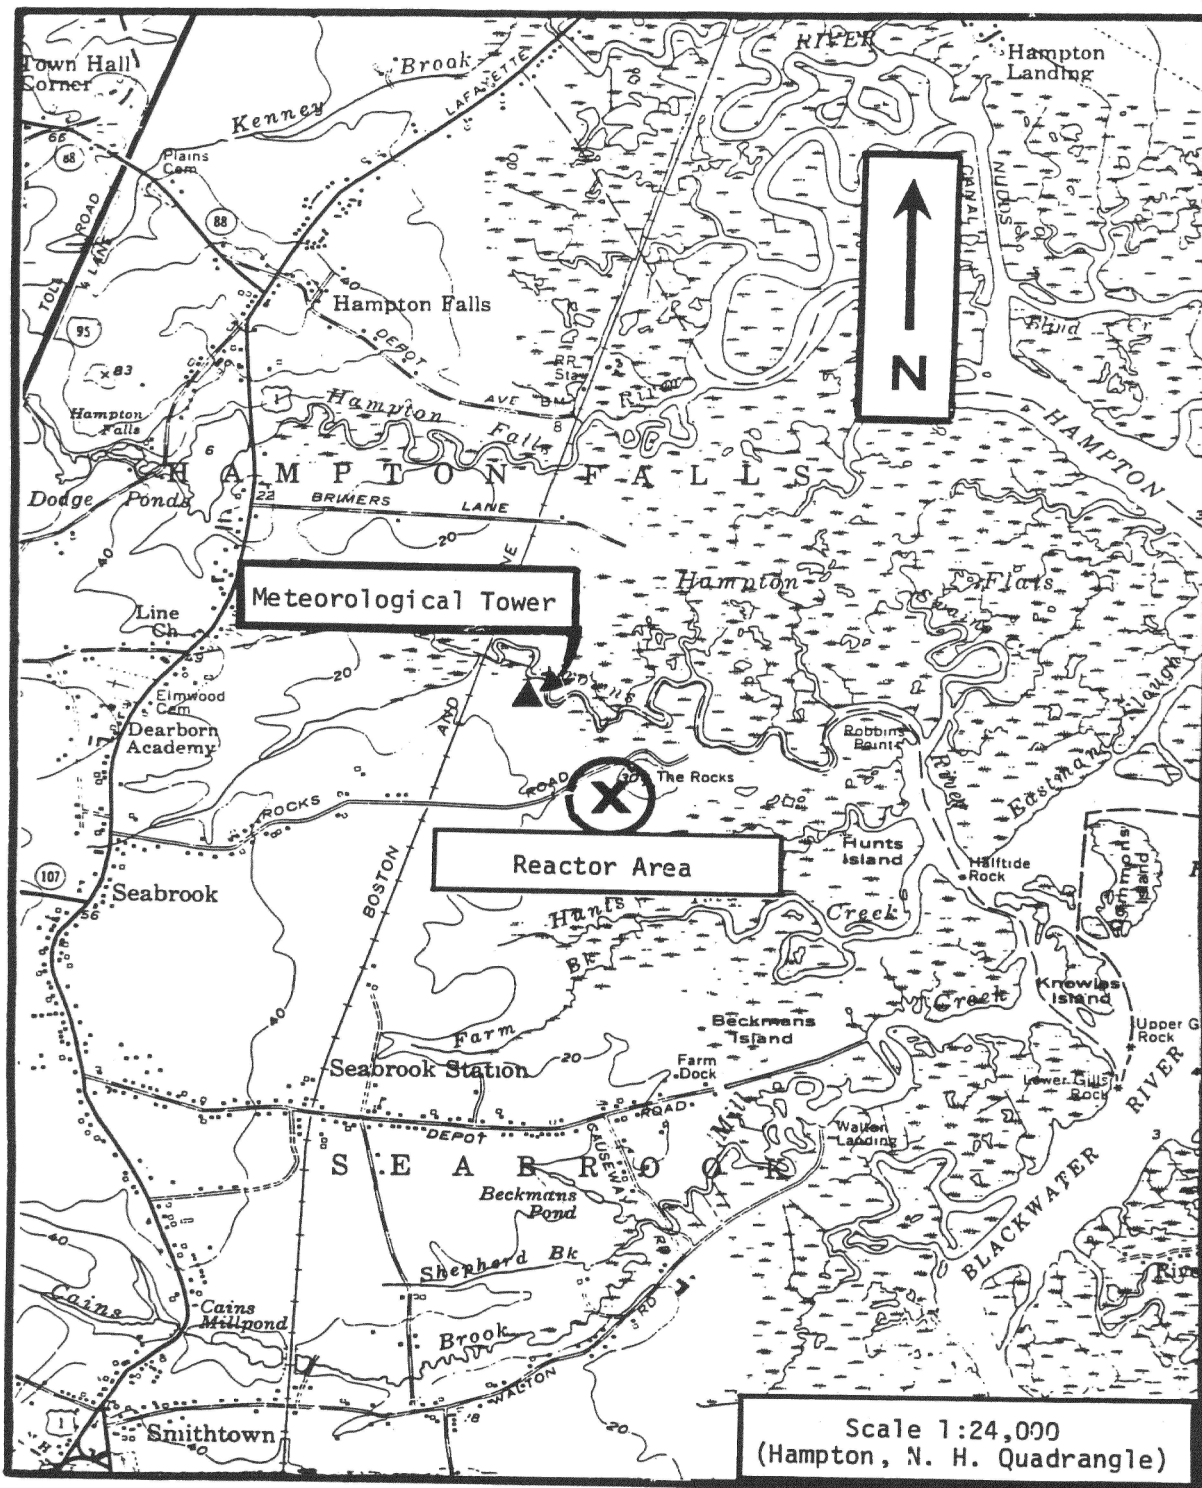

SEABROOK STATION  
UPDATED FINAL SAFETY  
ANALYSIS REPORT


Topographic Map Showing the Location of the  
Meteorological Tower with Respect to the Reactor Area

Figure 2.3-9

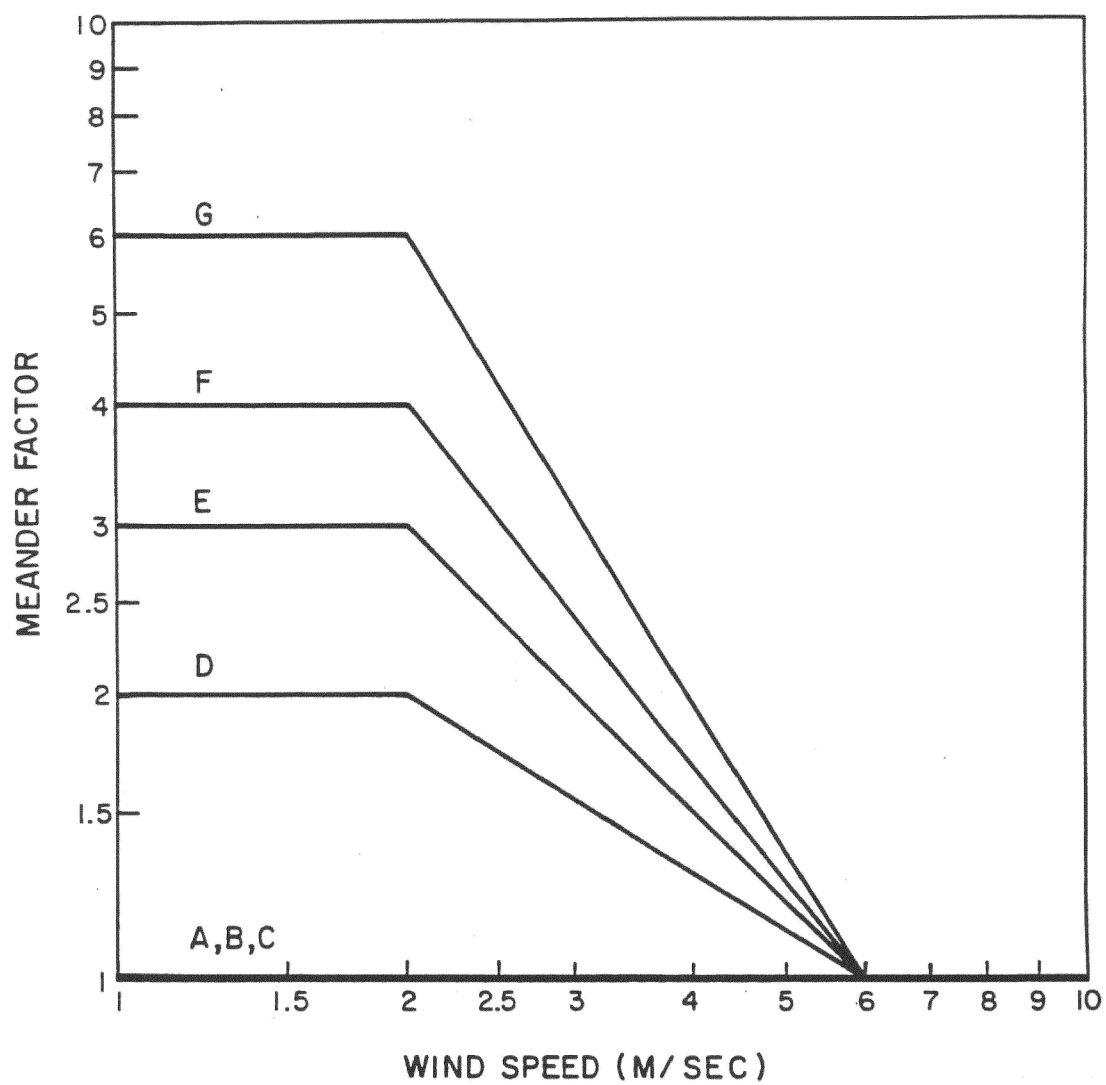

MEANDER FACTOR IS VALID UP TO 800 METERS FROM SOURCE.

SEABROOK STATION UPDATED FINAL SAFETY ANALYSIS REPORT	Meander as a Function of Wind Speed and Stability	
		Figure 2.3-10

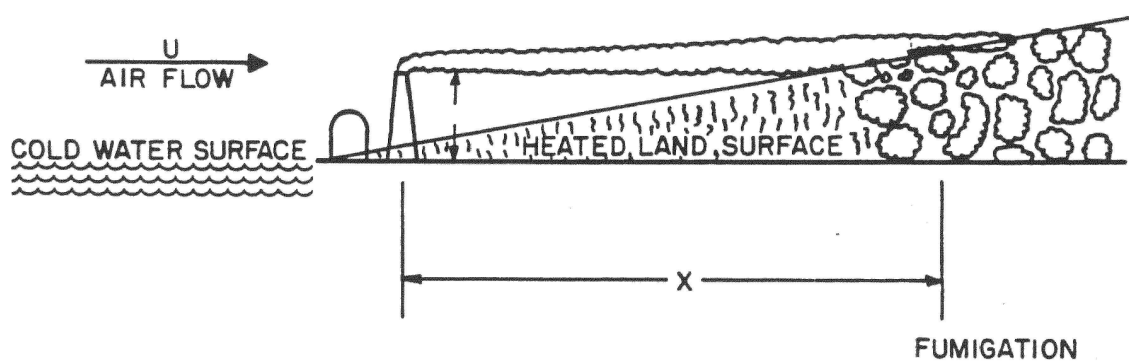

SEABROOK STATION UPDATED FINAL SAFETY ANALYSIS REPORT	Plume and TIBL Interaction	
		Figure 2.3-11