



UNITED STATES
NUCLEAR REGULATORY COMMISSION
WASHINGTON, D.C. 20555-0001

COMMONWEALTH EDISON COMPANY

AND

MIDAMERICAN ENERGY COMPANY

DOCKET NO. 50-254

QUAD CITIES NUCLEAR POWER STATION, UNIT 1

AMENDMENT TO FACILITY OPERATING LICENSE

Amendment No. 191
License No. DPR-29


1. The Nuclear Regulatory Commission (the Commission) has found that:
 - A. The application for amendment by Commonwealth Edison Company (the licensee) dated March 30, 1999, complies with the standards and requirements of the Atomic Energy Act of 1954, as amended (the Act) and the Commission's rules and regulations set forth in 10 CFR Chapter I;
 - B. The facility will operate in conformity with the application, the provisions of the Act, and the rules and regulations of the Commission;
 - C. There is reasonable assurance (i) that the activities authorized by this amendment can be conducted without endangering the health and safety of the public, and (ii) that such activities will be conducted in compliance with the Commission's regulations;
 - D. The issuance of this amendment will not be inimical to the common defense and security or to the health and safety of the public; and
 - E. The issuance of this amendment is in accordance with 10 CFR Part 51 of the Commission's regulations and all applicable requirements have been satisfied.
2. Accordingly, the license is amended by changes to the Technical Specifications as indicated in the attachment to this license amendment, and paragraph 3.B. of Facility Operating License No. DPR-29 is hereby amended to read as follows:

B. Technical Specifications

The Technical Specifications contained in Appendices A and B, as revised through Amendment No. 191 , are hereby incorporated in the license. The licensee shall operate the facility in accordance with the Technical Specifications.

3. This license amendment is effective as of the date of its issuance and shall be implemented within 60 days.

FOR THE NUCLEAR REGULATORY COMMISSION

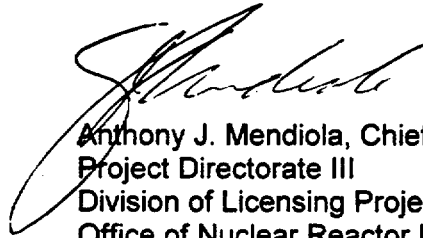

Anthony J. Mendiola, Chief, Section 2
Project Directorate III
Division of Licensing Project Management
Office of Nuclear Reactor Regulation

Attachment:
Changes to the Technical
Specifications

Date of Issuance: November 30, 1999

ATTACHMENT TO LICENSE AMENDMENT NO. 191

FACILITY OPERATING LICENSE NO. DPR-29

DOCKET NO. 50-254

Revise the Appendix A Technical Specifications by removing the page identified below and inserting the attached page. The revised page is identified by the captioned amendment number and contains marginal lines indicating the area of change.

REMOVE

INSERT

3/4.6-7a

3.6 - LIMITING CONDITIONS FOR OPERATION

4.6 - SURVEILLANCE REQUIREMENTS

E. Safety Valves

The safety valve function of the 9 reactor coolant system safety valves shall be OPERABLE in accordance with the specified code safety valve function lift settings^(a) established as:

- 1 safety valve^(b) @ 1135 psig ± 1%
- 2 safety valves @ 1240 psig ± 1%
- 2 safety valves @ 1250 psig ± 1%
- 4 safety valves @ 1260 psig ± 1%

APPLICABILITY:

OPERATIONAL MODE(s) 1, 2 and 3

ACTION:

1. With the safety valve function of one or more of the above required safety valves inoperable, be in at least HOT SHUTDOWN within 12 hours and in COLD SHUTDOWN within the next 24 hours
2. Deleted

E. Safety Valves

1. Deleted
2. At least once per 18^(c) months, 1/2 of the safety valves shall be removed, set pressure tested and reinstalled or replaced with spares that have been previously set pressure tested and stored in accordance with manufacture's recommendations. At least once per 40 months, the safety valves shall be rotated such that all 9 safety valves are removed, set pressure tested and reinstalled or replaced with spares that have been previously set pressure tested and stored in accordance with manufacture's recommendations.

a The lift setting pressure shall correspond to ambient conditions of the valves at nominal operating temperatures and pressures.

b Target Rock combination safety/relief valve.

c The surveillance interval has been extended to 24 months for Unit 1, cycle 16 only. The provisions of Specification 4.0.B are applicable.