



Gary R. Peterson
Vice President

Duke Power
Catawba Nuclear Station
4800 Concord Road
York, SC 29745
(803) 831-4251 OFFICE
(803) 831-3426 FAX

October 25, 2000

U.S. Nuclear Regulatory Commission
ATTENTION: Document Control Desk
Washington, D.C. 20555-0001

Subject: Duke Energy Corporation
Catawba Nuclear Station Unit 1
Docket No.: 50-413
Core Operating Limits Report (COLR)
Catawba Unit 1 Cycle 13, Revision 18

Attached, pursuant to Catawba Technical Specification 5.6.5, is an information copy of the revision to the Core Operating Limits Report for Catawba Unit 1 Cycle 13. The Unit 1 COLR is being revised to update the limits for the new Catawba 1 Cycle 13 reload core. Along with the power distribution surveillance data (Appendix A) which changes each cycle, this revision also includes the following non-editorial changes:

1. The K(Z) curves for MkbW and Westinghouse RFA fuel, Figures 3 and 4, have been updated to correspond to the Westinghouse LOCA analyses.
2. Table 1 has been added to clarify the Withdrawal Steps and Sequence for Control and Shutdown Banks. This table was added to alleviate the need to calculate bank overlap limits for each allowable All Rods Out parked position.
3. The minimum required boron concentration for the RWST, Cold Leg Accumulator, and Spent Fuel Pool was lowered by 50 ppm to be consistent with Unit 2, and to provide a larger boron operating range. The maximum concentration limits have not been adjusted.
4. The FAH LCO MARP table has been relocated from Appendix A, Table 7 to Table 3. The Appendix A tables now contain only cycle-specific power distribution surveillance Monitoring Factors. Additional peaking limits for axial peaks at 3.0 and 3.25 were also added to Table 3.

A001


U. S. Nuclear Regulatory Commission
October 25, 2000
Page 2

5. The Full Power Negative AFD limit shown in Figure 5 has been reduced from -20% to -18%.
6. The power distribution surveillance data contained in Appendix A has been updated for the new core. The tables contained in Appendix A were renumbered after inserting Table 1 for the RCCA Withdrawal Steps and Sequence, and moving Appendix A, Table 7 to Table 3.

All of the technical changes have been made consistent with the approved methodologies specified in Technical Specification 5.6.5.

Please direct any questions or concerns to George Strickland at (803) 831-3585.

Sincerely,



G. R. Peterson

Attachment

U. S. Nuclear Regulatory Commission
October 25, 2000
Page 3

xc w/att: L. A. Reyes, Regional Administrator
USNRC, Region II

C. P. Patel, Project Manager
USNRC, ONRR

D. J. Roberts
Senior Resident Inspector (CNS)

Catawba Unit 1 Cycle 13**Core Operating Limits Report
Revision 18****October 2000****Duke Power Company**

		Date
Prepared By:	<u><i>Scott B. Thomas</i></u>	<u>10/16/00</u>
Checked By:	<u><i>Audra & Abbey</i></u>	<u>10/16/00</u>
Checked By:	<u><i>V R Muggel</i></u>	<u>10/16/00</u>
Approved By:	<u><i>P.m. Abraham</i></u>	<u>10/17/2000</u>

QA Condition 1

The information presented in this report has been prepared and issued in accordance with Catawba Technical Specification 5.6.5.

Catawba 1 Cycle 13 Core Operating Limits Report

IMPLEMENTATION INSTRUCTIONS FOR REVISION 18

Revision 18 of the Catawba Unit 1 COLR contains limits specific to the Catawba 1 Cycle 13 core and may become effective any time during the NO MODE between Cycles 12 and 13.

This revision must become effective prior to entering MODE 6 which starts Cycle 13.

Catawba 1 Cycle 13 Core Operating Limits Report**REVISION LOG**

<u>Revision</u>	<u>EI Date</u>	<u>Pages Affected</u>	<u>COLR</u>
0 – 1	Superceded	N/A	C1C07
2 – 5	Superceded	N/A	C1C08
6 – 8	Superceded	N/A	C1C09
9 – 11	Superceded	N/A	C1C10
12 – 14	Superceded	N/A	C1C11
15 – 17	Superceded	N/A	C1C12
18	October 2000	1 – 26	C1C13
Appendix A			

Catawba 1 Cycle 13 Core Operating Limits Report

INSERTION SHEET FOR REVISION 18

Remove pages

Pages 1-25

Appendix A, Pages 1-270

Insert Rev. 18 pages

Pages 1-26

Appendix A, Pages 1-268

Catawba 1 Cycle 13 Core Operating Limits Report

1.0 Core Operating Limits Report

This Core Operating Limits Report (COLR) has been prepared in accordance with the requirements of Technical Specification 5.6.5.

The Technical Specifications that reference this report are listed below:

TS Section	Technical Specifications	COLR Parameter	COLR Section	COLR Page
3.1.1	Shutdown Margin	Shutdown Margin	2.1	6
3.1.3	Moderator Temperature Coefficient	MTC	2.2	6
3.1.4	Rod Group Alignment Limits	Shutdown Margin	2.1	6
3.1.5	Shutdown Bank Insertion Limit	Shutdown Margin	2.1	6
		Rod Insertion Limits	2.3	7
3.1.6	Control Bank Insertion Limit	Shutdown Margin	2.1	6
		Rod Insertion Limits	2.4	7
3.1.8	Physics Tests Exceptions	Shutdown Margin	2.1	6
3.2.1	Heat Flux Hot Channel Factor	F _Q	2.5	11
		AFD	2.7	18
		OTAT	2.8	21
		Penalty Factors	2.5	13
3.2.2	Nuclear Enthalpy Rise Hot Channel Factor	F _{ΔH}	2.6	17
		Penalty Factors	2.6	18
3.2.3	Axial Flux Difference	AFD	2.7	18
3.3.1	Reactor Trip System Instrumentation	OTAT	2.8	21
		OPAT	2.8	22
3.3.9	Boron Dilution Mitigation System	Reactor Makeup Water Flow Rate	2.9	23
3.5.1	Accumulators	Max and Min Boron Conc.	2.10	23
3.5.4	Refueling Water Storage Tank	Max and Min Boron Conc..	2.11	23
3.7.15	Spent Fuel Pool Boron Concentration	Min Boron Concentration	2.12	24
3.9.1	Refueling Operations - Boron Concentration	Min Boron Concentration	2.13	24
3.9.2	Refueling Operations – Nuclear Instrumentation	Reactor Makeup Water Flow Rate	2.14	24

The Selected License Commitments that reference this report are listed below:

SLC Section	Selected Licensing Commitment	COLR Parameter	COLR Section	COLR Page
16.7-9.3	Standby Shutdown System	Standby Makeup Pump Water Supply	2.15	25
16.9-11	Boration Systems – Borated Water Source – Shutdown	Borated Water Volume and Conc. for BAT/RWST	2.16	25
16.9-12	Boration Systems – Borated Water Source – Operating	Borated Water Volume and Conc. for BAT/RWST	2.17	26

Catawba 1 Cycle 13 Core Operating Limits Report

2.0 Operating Limits

The cycle-specific parameter limits for the specifications listed in Section 1.0 are presented in the following subsections. These limits have been developed using NRC approved methodologies specified in Technical Specification 5.6.5.

2.1 Shutdown Margin - SDM (TS 3.1.1, TS 3.1.4, TS 3.1.5, TS 3.1.6, TS 3.1.8)

2.1.1 For TS 3.1.1, shutdown margin shall be greater than or equal to 1.3% $\Delta K/K$ in mode 2 with $K_{eff} < 1.0$ and in modes 3 and 4.

2.1.2 For TS 3.1.1, shutdown margin shall be greater than or equal to 1.0% $\Delta K/K$ in mode 5.

2.1.3 For TS 3.1.4, shutdown margin shall be greater than or equal to 1.3% $\Delta K/K$ in mode 1 and mode 2.

2.1.4 For TS 3.1.5, shutdown margin shall be greater than or equal to 1.3% $\Delta K/K$ in mode 1 and mode 2 with any control bank not fully inserted.

2.1.5 For TS 3.1.6, shutdown margin shall be greater than or equal to 1.3% $\Delta K/K$ in mode 1 and mode 2 with $K_{eff} \geq 1.0$.

2.1.6 For TS 3.1.8, shutdown margin shall be greater than or equal to 1.3% $\Delta K/K$ in mode 2 during Physics Testing.

2.2 Moderator Temperature Coefficient - MTC (TS 3.1.3)

2.2.1 The Moderator Temperature Coefficient (MTC) Limits are:

The MTC shall be less positive than the upper limits shown in Figure 1. The BOC, ARO, HZP MTC shall be less positive than $0.7E-04 \Delta K/K/^{\circ}F$.

The EOC, ARO, RTP MTC shall be less negative than the $-4.1E-04 \Delta K/K/^{\circ}F$ lower MTC limit.

2.2.2 The 300 ppm MTC Surveillance Limit is:

The measured 300 PPM ARO, equilibrium RTP MTC shall be less negative than or equal to $-3.2E-04 \Delta K/K/^{\circ}F$.

Catawba 1 Cycle 13 Core Operating Limits Report

2.2.3 The 60 PPM MTC Surveillance Limit is:

The 60 PPM ARO, equilibrium RTP MTC shall be less negative than or equal to $-3.85\text{E-}04 \Delta\text{K/K/}^{\circ}\text{F}$.

Where:


- BOC = Beginning of Cycle (burnup corresponding to most positive MTC)
- EOC = End of Cycle
- ARO = All Rods Out
- HZP = Hot Zero Thermal Power
- RTP = Rated Thermal Power
- PPM = Parts per million (Boron)

2.3 Shutdown Bank Insertion Limit (TS 3.1.5)

2.3.1 Each shutdown bank shall be withdrawn to at least 226 steps. Shutdown banks are withdrawn in sequence and with no overlap.

2.4 Control Bank Insertion Limits (TS 3.1.6)

2.4.1 Control banks shall be within the insertion, sequence, and overlap limits shown in Figure 2. Specific control bank withdrawal and overlap limits as a function of the fully withdrawn position are shown in Table 1.

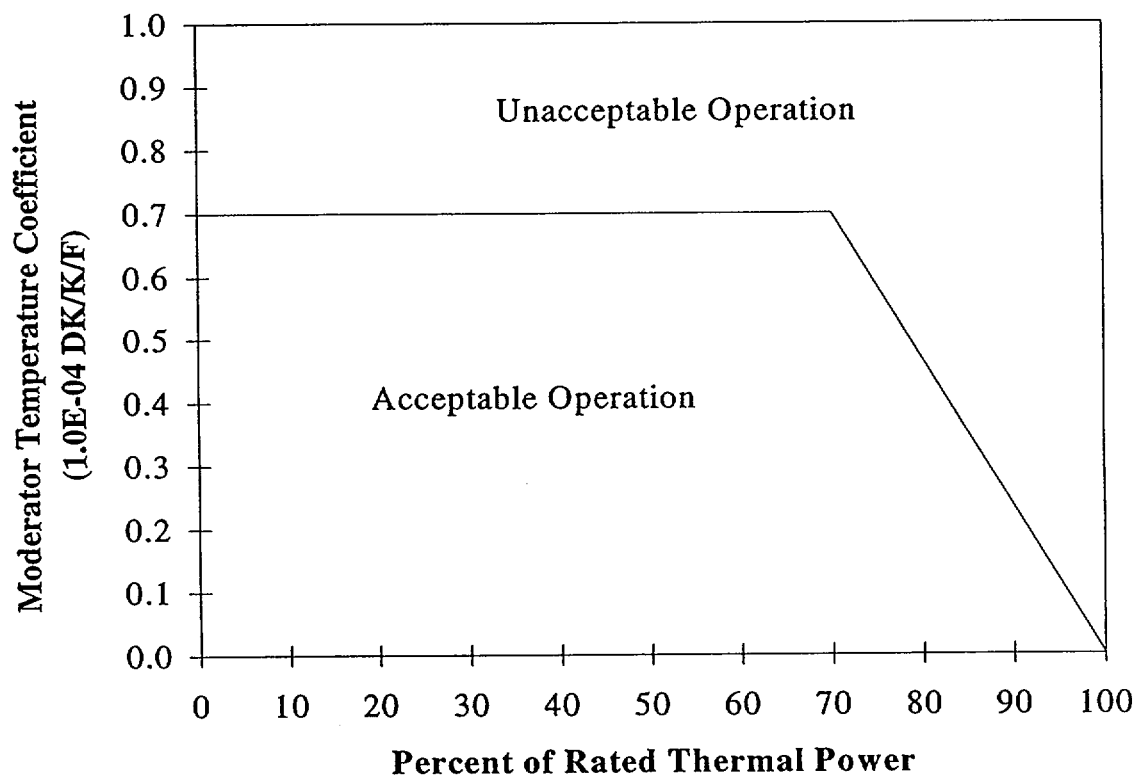
Catawba 1 Cycle 13 Core Operating Limits Report**Figure 1****Moderator Temperature Coefficient Upper Limit Versus Power Level**

NOTE: Compliance with Technical Specification 3.1.3 may require rod withdrawal limits. Refer to the Unit 1 ROD manual for details.

Catawba 1 Cycle 13 Core Operating Limits Report

Figure 2

Control Bank Insertion Limits Versus Percent Rated Thermal Power

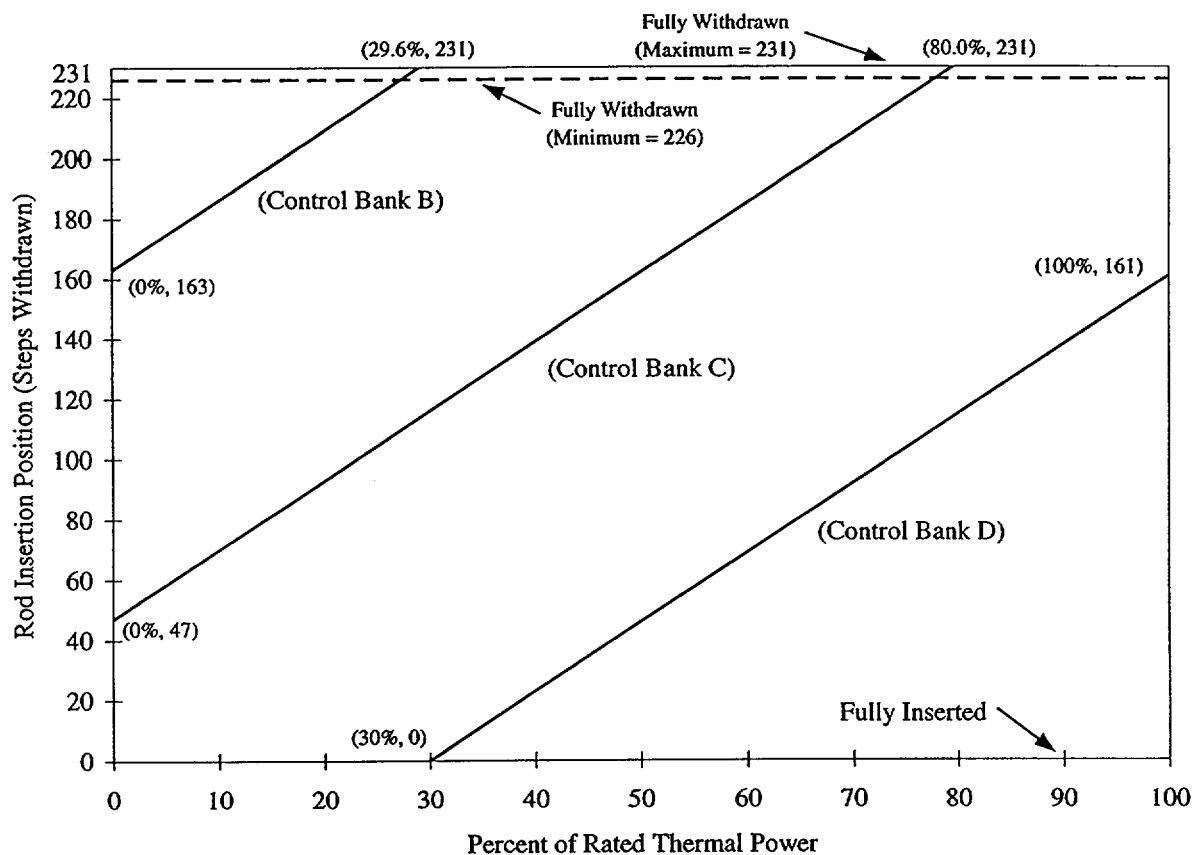

NOTE: Compliance with Technical Specification 3.1.3 may require rod withdrawal limits. Refer to the Unit 1 ROD manual for details.

Catawba 1 Cycle 13 Core Operating Limits Report

Table 1
Control Bank Withdrawal Steps and Sequence

Fully Withdrawn at 226 Steps			
Control Bank A	Control Bank B	Control Bank C	Control Bank D
0 Start	0	0	0
116	0 Start	0	0
226 Stop	110	0	0
226	116	0 Start	0
226	226 Stop	110	0
226	226	116	0 Start
226	226	226 Stop	110

Fully Withdrawn at 228 Steps			
Control Bank A	Control Bank B	Control Bank C	Control Bank D
0 Start	0	0	0
116	0 Start	0	0
228 Stop	112	0	0
228	116	0 Start	0
228	228 Stop	112	0
228	228	116	0 Start
228	228	228 Stop	112

Fully Withdrawn at 230 Steps			
Control Bank A	Control Bank B	Control Bank C	Control Bank D
0 Start	0	0	0
116	0 Start	0	0
230 Stop	114	0	0
230	116	0 Start	0
230	230 Stop	114	0
230	230	116	0 Start
230	230	230 Stop	114

Fully Withdrawn at 227 Steps			
Control Bank A	Control Bank B	Control Bank C	Control Bank D
0 Start	0	0	0
116	0 Start	0	0
227 Stop	111	0	0
227	116	0 Start	0
227	227 Stop	111	0
227	227	116	0 Start
227	227	227 Stop	111

Fully Withdrawn at 229 Steps			
Control Bank A	Control Bank B	Control Bank C	Control Bank D
0 Start	0	0	0
116	0 Start	0	0
229 Stop	113	0	0
229	116	0 Start	0
229	229 Stop	113	0
229	229	116	0 Start
229	229	229 Stop	113

Fully Withdrawn at 231 Steps			
Control Bank A	Control Bank B	Control Bank C	Control Bank D
0 Start	0	0	0
116	0 Start	0	0
231 Stop	115	0	0
231	116	0 Start	0
231	231 Stop	115	0
231	231	116	0 Start
231	231	231 Stop	115

Catawba 1 Cycle 13 Core Operating Limits Report

2.5 Heat Flux Hot Channel Factor - $F_Q(X,Y,Z)$ (TS 3.2.1)

2.5.1 $F_Q(X,Y,Z)$ steady-state limits are defined by the following relationships:

$$F_Q^{RTP} * K(Z) / P \quad \text{for } P > 0.5$$

$$F_Q^{RTP} * K(Z) / 0.5 \quad \text{for } P \leq 0.5$$

where,

$$P = (\text{Thermal Power}) / (\text{Rated Power})$$

Note: The measured $F_Q(X,Y,Z)$ shall be increased by 3% to account for manufacturing tolerances and 5% to account for measurement uncertainty when comparing against the limits. The manufacturing tolerance and measurement uncertainty are implicitly included in the F_Q surveillance limits as defined in COLR Sections 2.5.5 and 2.5.6.

2.5.2 $F_Q^{RTP} = 2.50 \times K(\text{BU})$

2.5.3 $K(Z)$ is the normalized $F_Q(X,Y,Z)$ as a function of core height. $K(Z)$ for MkBW fuel is provided in Figure 3, and the $K(Z)$ for Westinghouse RFA fuel is provided in Figure 4.

2.5.4 $K(\text{BU})$ is the normalized $F_Q(X,Y,Z)$ as a function of burnup. $K(\text{BU})$ for both MkBW fuel and Westinghouse RFA fuel is 1.0 at all burnups.

The following parameters are required for core monitoring per the Surveillance Requirements of Technical Specification 3.2.1:

2.5.5 $[F_Q^L(X,Y,Z)]^{OP} = \frac{F_Q^D(X,Y,Z) * M_Q(X,Y,Z)}{UMT * MT * TILT}$

where:

$[F_Q^L(X,Y,Z)]^{OP}$ = Cycle dependent maximum allowable design peaking factor that ensures that the $F_Q(X,Y,Z)$ LOCA limit is not exceeded for operation within the AFD, RIL, and QPTR limits.
 $F_Q^L(X,Y,Z)^{OP}$ includes allowances for calculational and measurement uncertainties.

Catawba 1 Cycle 13 Core Operating Limits Report

$F_Q^D(X,Y,Z)$ = Design power distribution for F_Q . $F_Q^D(X,Y,Z)$ is provided in Table 4, Appendix A, for normal operating conditions and in Table 5, Appendix A for power escalation testing during initial startup operation.

$M_Q(X,Y,Z)$ = Margin remaining in core location X,Y,Z to the LOCA limit in the transient power distribution. $M_Q(X,Y,Z)$ is provided in Table 4, Appendix A for normal operating conditions and in Table 5, Appendix A for power escalation testing during initial startup operation.

UMT = Total Peak Measurement Uncertainty. (UMT = 1.05)

MT = Engineering Hot Channel Factor. (MT = 1.03)

TILT = Peaking penalty that accounts for allowable quadrant power tilt ratio of 1.02. (TILT = 1.035)

$$2.5.6 \quad [F_Q^L(X,Y,Z)]^{RPS} = \frac{F_Q^D(X,Y,Z) * M_C(X,Y,Z)}{UMT * MT * TILT}$$

where:

$[F_Q^L(X,Y,Z)]^{RPS}$ = Cycle dependent maximum allowable design peaking factor that ensures that the $F_Q(X,Y,Z)$ Centerline Fuel Melt (CFM) limit is not exceeded for operation within the AFD, RIL, and QPRT limits. $[F_Q^L(X,Y,Z)]^{RPS}$ includes allowances for calculational and measurement uncertainties.

$F_Q^D(X,Y,Z)$ = Design power distributions for F_Q . $F_Q^D(X,Y,Z)$ is provided in Table 4, Appendix A for normal operating conditions and in Table 5, Appendix A for power escalation testing during initial startup operations.

$M_C(X,Y,Z)$ = Margin remaining to the CFM limit in core location X,Y,Z from the transient power distribution. $M_C(X,Y,Z)$ is provided in Table 6, Appendix A for normal operating conditions and in Table 7, Appendix A for power escalation testing during initial startup operations.

Catawba 1 Cycle 13 Core Operating Limits Report

UMT = Measurement Uncertainty (UMT = 1.05)

MT = Engineering Hot Channel Factor (MT = 1.03)

TILT = Peaking penalty that accounts for allowable quadrant power tilt ratio of 1.02. (TILT = 1.035)

2.5.7 KSLOPE = 0.0725


where:

KSLOPE = the adjustment to the K_1 value from OTΔT trip setpoint required to compensate for each 1% that $F_Q^M(X,Y,Z)$ exceeds $F_Q^L(X,Y,Z)^{RPS}$.


2.5.8 $F_Q(X,Y,Z)$ Penalty Factors for Technical Specification Surveillances 3.2.1.2 and 3.2.1.3 are provided in Table 2.

Catawba 1 Cycle 13 Core Operating Limits Report**Figure 3**

**$K(Z)$, Normalized $F_Q(X,Y,Z)$ as a Function of Core Height
for MkBW Fuel**

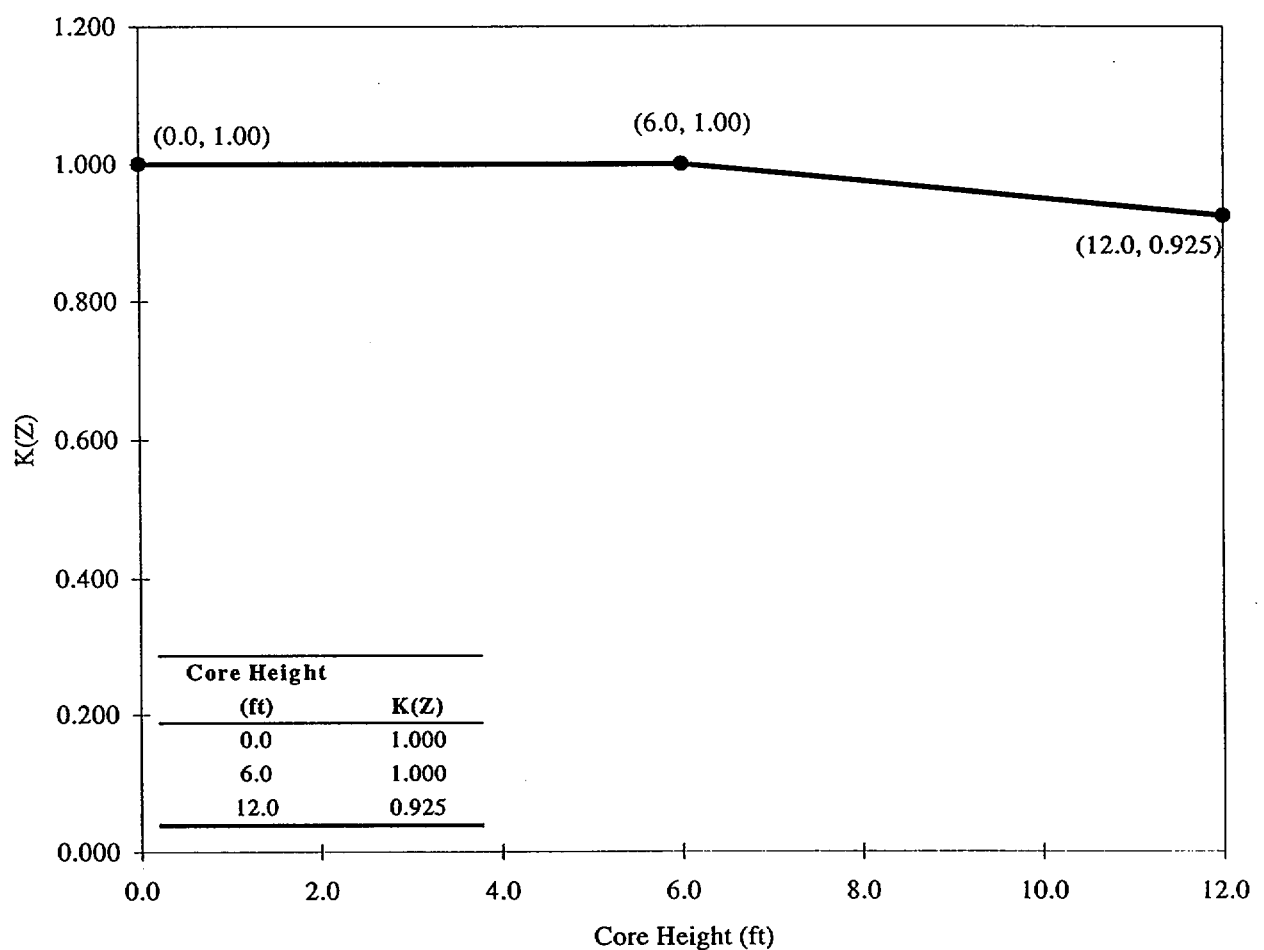

Note: Figure 3 represents the $K(Z)$ function analyzed for Mk-BW fuel in the C1C13 Maneuvering Analysis (CNC-1553.05-00-0337). This $K(Z)$ function is based on Appendix K LOCA methodology and is more conservative than the current $K(Z)$ function required by the BELOCA methodology referenced in Technical Specification 5.6.5.

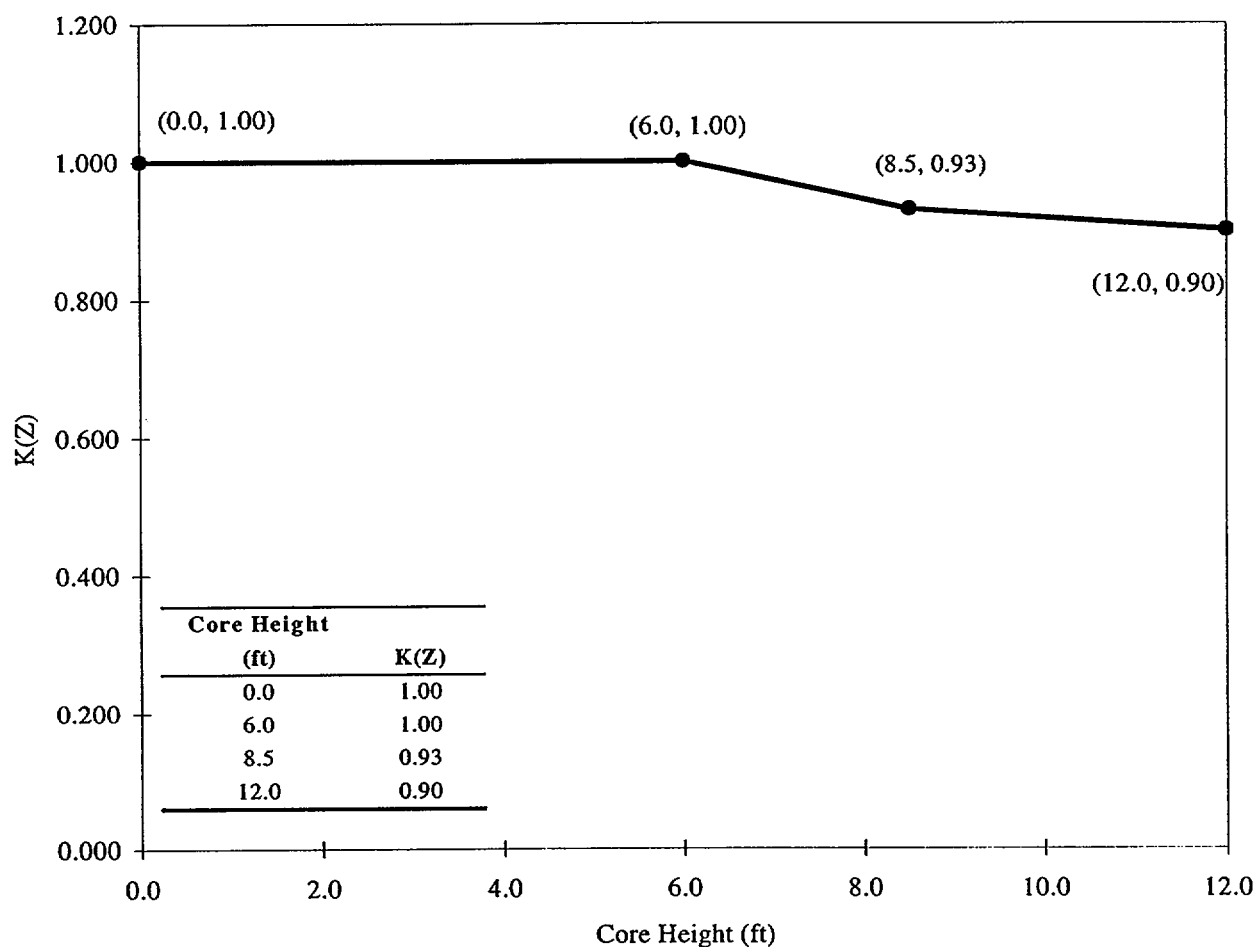Catawba 1 Cycle 13 Core Operating Limits Report**Figure 4** **$K(Z)$, Normalized $F_Q(X,Y,Z)$ as a Function of Core Height
for RFA Fuel**

Note: Figure 4 represents the $K(Z)$ function analyzed for RFA fuel in the C1C13 Maneuvering Analysis (CNC-1553.05-00-0337). This $K(Z)$ function is based on Appendix K LOCA methodology and is more conservative than the current $K(Z)$ function required by the BELOCA methodology referenced in Technical Specification 5.6.5.

Catawba 1 Cycle 13 Core Operating Limits Report

Table 2

$F_Q(X,Y,Z)$ and $F_{\Delta H}(X,Y)$ Penalty Factors
For Tech Spec Surveillances 3.2.1.2, 3.2.1.3 and 3.2.2.2

Burnup (EFPD)	$F_Q(X,Y,Z)$ Penalty Factor(%)	$F_{\Delta H}(X,Y)$ Penalty Factor (%)
4	2.00	2.00
12	2.00	2.00
25	2.00	2.00
50	2.00	2.00
75	2.00	2.00
100	2.00	2.00
125	2.00	2.00
150	2.00	2.00
175	2.06	2.00
200	2.00	2.00
225	2.00	2.00
250	2.00	2.00
275	2.00	2.00
300	2.00	2.00
470	2.00	2.00
495	2.44	2.00
505	2.46	2.00

Note: Linear interpolation is adequate for intermediate cycle burnups.

Catawba 1 Cycle 13 Core Operating Limits Report

2.6 Nuclear Enthalpy Rise Hot Channel Factor - $F_{\Delta H}(X,Y)$ (TS 3.2.2)

The $F_{\Delta H}$ steady-state limits referred to in Technical Specification 3.2.2 is defined by the following relationship.

$$2.6.1 \quad [F_{\Delta H}^L(X,Y)]^{LCO} = \text{MARP}(X,Y) * \left[1.0 + \frac{1}{\text{RRH}} * (1.0 - P) \right]$$

where:

$[F_{\Delta H}^L(X,Y)]^{LCO}$ is defined as the steady-state, maximum allowed radial peak.

$[F_{\Delta H}^L(X,Y)]^{LCO}$ includes allowances for calculation/measurement uncertainty.

$\text{MARP}(X,Y) =$ Cycle-specific operating limit Maximum Allowable Radial Peaks. $\text{MARP}(X,Y)$ radial peaking limits are provided in Table 3.

$$P = \frac{\text{Thermal Power}}{\text{Rated Thermal Power}}$$

$\text{RRH} =$ Thermal Power reduction required to compensate for each 1% that the measured radial peak, $F_{\Delta H}^M(X,Y)$, exceeds the limit.

$$(\text{RRH} = 3.34, 0.0 < P \leq 1.0)$$

The following parameters are required for core monitoring per the Surveillance requirements of Technical Specification 3.2.2.

$$2.6.2 \quad [F_{\Delta H}^L(X,Y)]^{\text{SURV}} = \frac{F_{\Delta H}^D(X,Y) \times M_{\Delta H}(X,Y)}{\text{UMR} \times \text{TILT}}$$

where:

$[F_{\Delta H}^L(X,Y)]^{\text{SURV}} =$ Cycle dependent maximum allowable design peaking factor that ensures that the $F_{\Delta H}(X,Y)$ limit is not exceeded for operation within the AFD, RIL, and QPTR limits.

$F_{\Delta H}^L(X,Y)^{\text{SURV}}$ includes allowances for calculational and measurement uncertainty.

$F_{\Delta H}^D(X,Y) =$ Design power distribution for $F_{\Delta H}$. $F_{\Delta H}^D(X,Y)$ is provided in Table 8, Appendix A for normal operation and in Table 9,

Catawba 1 Cycle 13 Core Operating Limits Report

Appendix A for power escalation testing during initial startup operation.

$M_{\Delta H}(X,Y)$ = The margin remaining in core location X,Y relative to the Operational DNB limits in the transient power distribution. $M_{\Delta H}(X,Y)$ is provided in Table 8, Appendix A for normal operation and in Table 9, Appendix A for power escalation testing during initial startup operation.

UMR = Uncertainty value for measured radial peaks. UMR is set to 1.0 since a factor of 1.04 is implicitly included in the variable $M_{\Delta H}(X,Y)$.

TILT = Peaking penalty that accounts for allowable quadrant power tilt ratio of 1.02. (TILT = 1.035)

NOTE: $[F_{\Delta H}^L(X,Y)]^{SURV}$ is the parameter identified as $[F_{\Delta H}(X,Y)]^{MAX}$ in DPC-NE-2011PA.

2.6.3 RRH = 3.34

where:

RRH = Thermal Power reduction required to compensate for each 1% that the measured radial peak, $F_{\Delta H}^M(X,Y)$ exceeds its limit. ($0 < P \leq 1.0$)

2.6.4 TRH = 0.04

where:

TRH = Reduction in OTΔT K_1 setpoint required to compensate for each 1% that the measured radial peak, $F_{\Delta H}(X,Y)$ exceeds its limit.

2.6.5 $F_{\Delta H}(X,Y)$ Penalty Factors for Technical Specification Surveillance 3.2.2.2 are provided in Table 2.

2.7 Axial Flux Difference – AFD (TS 3.2.3)


2.7.1 The Axial Flux Difference (AFD) Limits are provided in Figure 5.

Catawba 1 Cycle 13 Core Operating Limits Report

Table 3
Maximum Allowable Radial Peaks (MARPS)

MkBW and RFA Fuel MARPs

Core Height (ft)	Axial Peak												
	1.05	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.1	3.0	3.25
0.12	1.695	1.725	1.790	1.847	1.897	1.903	1.834	1.780	1.697	1.620	1.520	1.199	1.136
1.20	1.692	1.723	1.784	1.839	1.886	1.867	1.811	1.788	1.714	1.639	1.525	1.170	1.106
2.40	1.696	1.725	1.781	1.833	1.872	1.823	1.768	1.751	1.694	1.639	1.542	1.156	1.095
3.60	1.699	1.726	1.778	1.822	1.830	1.779	1.726	1.705	1.652	1.603	1.541	1.190	1.120
4.80	1.701	1.725	1.772	1.810	1.784	1.733	1.682	1.664	1.614	1.565	1.501	1.220	1.174
6.00	1.703	1.725	1.763	1.779	1.732	1.686	1.638	1.622	1.574	1.529	1.461	1.194	1.145
7.20	1.703	1.721	1.751	1.731	1.683	1.633	1.587	1.571	1.527	1.488	1.424	1.165	1.116
8.40	1.698	1.709	1.719	1.677	1.628	1.579	1.534	1.522	1.479	1.440	1.373	1.134	1.089
9.60	1.690	1.694	1.668	1.617	1.574	1.529	1.487	1.476	1.436	1.399	1.337	1.110	1.065
10.80	1.679	1.666	1.619	1.566	1.518	1.476	1.434	1.427	1.390	1.355	1.294	1.075	1.033
12.00	1.653	1.624	1.569	1.520	1.471	1.432	1.394	1.389	1.356	1.327	1.273	1.061	1.017

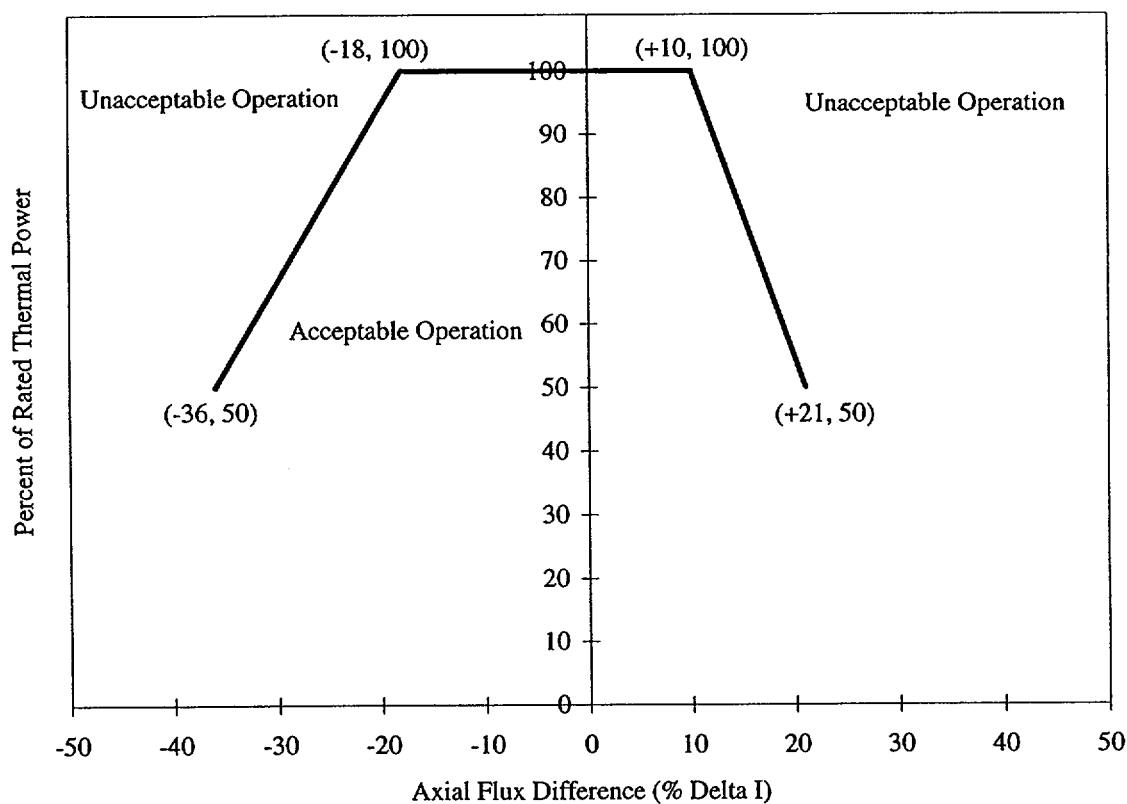Catawba 1 Cycle 13 Core Operating Limits Report**Figure 5****Percent of Rated Thermal Power Versus Percent Axial Flux Difference Limits**

NOTE: Compliance with Technical Specification 3.2.1 may require more restrictive AFD limits. Refer to the Unit 1 ROD manual for operational AFD limits.

Catawba 1 Cycle 13 Core Operating Limits Report

2.8 Reactor Trip System Instrumentation Setpoints (TS 3.3.1) Table 3.3.1-1

2.8.1 Overtemperature ΔT Setpoint Parameter Values

<u>Parameter</u>	<u>Nominal Value</u>
Overtemperature ΔT reactor trip setpoint	$K_1 = 1.1978$
Overtemperature ΔT reactor trip heatup setpoint penalty coefficient	$K_2 = 0.03340/^{\circ}\text{F}$
Overtemperature ΔT reactor trip depressurization setpoint penalty coefficient	$K_3 = 0.001601/\text{psi}$
Time constants utilized in the lead-lag compensator for ΔT	$\tau_1 = 8 \text{ sec.}$ $\tau_2 = 3 \text{ sec.}$
Time constant utilized in the lag compensator for ΔT	$\tau_3 = 0 \text{ sec.}$
Time constants utilized in the lead-lag compensator for T_{avg}	$\tau_4 = 22 \text{ sec.}$ $\tau_5 = 4 \text{ sec.}$
Time constant utilized in the measured T_{avg} lag compensator	$\tau_6 = 0 \text{ sec.}$
$f_1(\Delta I)$ "positive" breakpoint	$= 19.0 \% \Delta I$
$f_1(\Delta I)$ "negative" breakpoint	$= \text{N/A}^*$
$f_1(\Delta I)$ "positive" slope	$= 1.769 \% \Delta T_0 / \% \Delta I$
$f_1(\Delta I)$ "negative" slope	$= \text{N/A}^*$

- * The $f_1(\Delta I)$ "negative" breakpoint and the $f_1(\Delta I)$ "negative" slope are not applicable since the $f_1(\Delta I)$ function is not required below the $f_1(\Delta I)$ "positive" breakpoint of 19.0% ΔI .

Catawba 1 Cycle 13 Core Operating Limits Report

2.8.2 Overpower ΔT Setpoint Parameter Values

<u>Parameter</u>	<u>Nominal Value</u>
Overpower ΔT reactor trip setpoint	$K_4 = 1.0864$
Overpower ΔT reactor trip heatup setpoint penalty coefficient (for $T > T''$)	$K_6 = 0.001179/^{\circ}\text{F}$
Time constants utilized in the lead-lag compensator for ΔT	$\tau_1 = 8 \text{ sec.}$ $\tau_2 = 3 \text{ sec.}$
Time constant utilized in the lag compensator for ΔT	$\tau_3 = 0 \text{ sec.}$
Time constant utilized in the measured T_{avg} lag compensator	$\tau_6 = 0 \text{ sec.}$
Time constant utilized in the rate-lag controller for T_{avg}	$\tau_7 = 10 \text{ sec.}$
$f_2(\Delta I)$ "positive" breakpoint	$= 35.0 \% \Delta I$
$f_2(\Delta I)$ "negative" breakpoint	$= -35.0 \% \Delta I$
$f_2(\Delta I)$ "positive" slope	$= 7.0 \% \Delta T_0 / \% \Delta I$
$f_2(\Delta I)$ "negative" slope	$= 7.0 \% \Delta T_0 / \% \Delta I$

Catawba 1 Cycle 13 Core Operating Limits Report

2.9 Boron Dilution Mitigation System (TS 3.3.9)

2.9.1 Reactor Makeup Water Pump flow rate limits:

<u>Applicable Mode</u>	<u>Limit</u>
Mode 3	≤ 150 gpm
Mode 4 or 5	≤ 70 gpm

2.10 Accumulators (TS 3.5.1)

2.10.1 Boron concentration limits during modes 1 and 2, and mode 3 with RCS pressure >1000 psi:

<u>Parameter</u>	<u>Limit</u>
Cold Leg Accumulator minimum boron concentration.	2,500 ppm
Cold Leg Accumulator maximum boron concentration.	2,975 ppm

2.11 Refueling Water Storage Tank - RWST (TS 3.5.4)

2.11.1 Boron concentration limits during modes 1, 2, 3, and 4:

<u>Parameter</u>	<u>Limit</u>
Refueling Water Storage Tank minimum boron concentration.	2,700 ppm
Refueling Water Storage Tank maximum boron concentration.	2,975 ppm

Catawba 1 Cycle 13 Core Operating Limits Report

2.12 Spent Fuel Pool Boron Concentration (TS 3.7.15)

2.12.1 Minimum boron concentration limit for the spent fuel pool. Applicable when fuel assemblies are stored in the spent fuel pool.

<u>Parameter</u>	<u>Limit</u>
Spent fuel pool minimum boron concentration.	2,700 ppm

2.13 Refueling Operations - Boron Concentration (TS 3.9.1)

2.13.1 Minimum boron concentration limit for the filled portions of the Reactor Coolant System, refueling canal, and refueling cavity for mode 6 conditions. The minimum boron concentration limit and plant refueling procedures ensure that the K_{eff} of the core will remain within the mode 6 reactivity requirement of $K_{eff} \leq 0.95$.

<u>Parameter</u>	<u>Limit</u>
Minimum Boron concentration of the Reactor Coolant System, the refueling canal, and the refueling cavity.	2,700 ppm

2.14 Refueling Operations - Instrumentation (TS 3.9.2)

2.14.1 Reactor Makeup Water Pump Flow rate Limit:

<u>Applicable Mode</u>	<u>Limit</u>
Mode 6	≤ 70 gpm

Catawba 1 Cycle 13 Core Operating Limits Report

2.15 Standby Shutdown System - Standby Makeup Pump Water Supply - (SLC-16.7-9.3)

2.15.1 Minimum boron concentration limit for the spent fuel pool. Applicable for modes 1, 2, and 3.

<u>Parameter</u>	<u>Limit</u>
Spent fuel pool minimum boron concentration for surveillance SLC-16.7-9.3.	2,700 ppm

2.16 Borated Water Source – Shutdown (SLC 16.9-11)

2.16.1 Volume and boron concentrations for the Boric Acid Storage System and the Refueling Water Storage Tank (RWST) during mode 4 with any RCS cold leg temperature $\leq 285^{\circ}\text{F}$, and modes 5 and 6.

<u>Parameter</u>	<u>Limit</u>
Boric Acid Storage System minimum contained borated water volume	12,000 gallons
Boric Acid Storage System minimum boron concentration	7,000 ppm
Boric Acid Storage System minimum water volume required to maintain SDM at 7,000 ppm	585 gallons
Refueling Water Storage Tank minimum contained borated water volume	45,000 gallons
Refueling Water Storage Tank minimum boron concentration	2,700 ppm
Refueling Water Storage Tank minimum water volume required to maintain SDM at 2,700 ppm	3,500 gallons

Catawba 1 Cycle 13 Core Operating Limits Report**2.17 Borated Water Source - Operating (SLC 16.9-12)**

2.17.1 Volume and boron concentrations for the Boric Acid Storage System and the Refueling Water Storage Tank (RWST) during modes 1, 2, 3, and mode 4 with all RCS cold leg temperatures > 285°F.

<u>Parameter</u>	<u>Limit</u>
Boric Acid Storage System minimum contained borated water volume	24,000 gallons
Boric Acid Storage System minimum boron concentration	7,000 ppm
Boric Acid Storage System minimum water volume required to maintain SDM at 7,000 ppm	12,300 gallons
Refueling Water Storage Tank minimum contained borated water volume	98,607 gallons
Refueling Water Storage Tank minimum boron concentration	2,700 ppm
Refueling Water Storage Tank minimum water volume required to maintain SDM at 2,700 ppm	57,107 gallons

NOTE: Data contained in the Appendix to this document was generated in the Catawba 1 Cycle 13 Maneuvering Analysis calculation file, CNC-1553.05-00-0337. The Plant Nuclear Engineering Section will control this information via computer file(s) and should be contacted if there is a need to access this information.

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 1 of 268

TABLE 4

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	.5917	.4866	.4822	.4909	.4617	.4682	.4172	.2807
	* 2.6315	* 3.3922	* 3.5787	* 3.3302	* 3.5877	* 3.3863	* 3.8866	* 5.7073
9	.4866	.4931	.5115	.4714	.4801	.4541	.4205	.2948
	* 3.3922	* 3.4009	* 3.2870	* 3.5961	* 3.3512	* 3.6114	* 3.7710	* 5.4628
10	.4822	.5126	.4812	.4790	.4562	.4367	.4151	.2893
	* 3.5787	* 3.2819	* 3.5995	* 3.4499	* 3.7040	* 3.8659	* 3.8964	* 5.6192
11	.4909	.4714	.4790	.4487	.4552	.4302	.3804	.2514
	* 3.3302	* 3.5936	* 3.4443	* 3.8049	* 3.5504	* 3.8587	* 4.3510	* 6.6846
12	.4617	.4801	.4562	.4552	.3999	.3815	.3316	
	* 3.5877	* 3.3512	* 3.7040	* 3.5504	* 3.7744	* 3.8925	* 4.9598	
13	.4682	.4541	.4367	.4302	.3815	.3327	.2471	
	* 3.3863	* 3.6114	* 3.8659	* 3.8587	* 3.8925	* 4.3869	* 6.4814	
14	.4172	.4205	.4151	.3804	.3316	.2471		
	* 3.8866	* 3.7710	* 3.8964	* 4.3510	* 4.9598	* 6.4814		
15	.2807	.2948	.2893	.2514	F-SUB-Q			
	* 5.7073	* 5.4569	* 5.6111	* 6.6846	M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	.8247	1.1227	1.0750	.8561	.9461	.8355	.8518	.5332
	* 1.8963	* 1.5157	* 1.6453	* 1.9842	* 1.8002	* 1.9641	* 1.9593	* 3.0951
9	1.1227	1.1281	.9385	.9786	.8637	.9916	.8789	.6188
	* 1.5157	* 1.5318	* 1.8227	* 1.7796	* 1.9407	* 1.7302	* 1.8655	* 2.6776
10	1.0750	.9385	.9873	.8344	1.0013	1.0024	.8648	.5267
	* 1.6453	* 1.8243	* 1.7941	* 2.0386	* 1.7525	* 1.7406	* 1.9257	* 3.1972
11	.8561	.9786	.8355	.9287	.8464	.9558	.8279	.4703
	* 1.9842	* 1.7788	* 2.0367	* 1.8759	* 1.9921	* 1.8117	* 2.0500	* 3.6825
12	.9461	.8637	1.0013	.8464	.8475	.8290	.6134	
	* 1.8002	* 1.9407	* 1.7539	* 1.9921	* 1.8128	* 1.9241	* 2.7748	
13	.8355	.9916	1.0024	.9558	.8301	.7488	.4660	
	* 1.9641	* 1.7310	* 1.7406	* 1.8117	* 1.9241	* 2.0951	* 3.5662	
14	.8518	.8789	.8648	.8279	.6134	.4660		
	* 1.9593	* 1.8655	* 1.9257	* 2.0500	* 2.7735	* 3.5625		
15	.5332	.6188	.5278	.4703	F-SUB-Q			
	* 3.0951	* 2.6743	* 3.1972	* 3.6825	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 2 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0935	* 1.4099	* 1.3232	* 1.0599	* 1.1487	* 1.0404	* 1.0501	* .6481
	* 1.6160	* 1.2617	* 1.3687	* 1.6391	* 1.5176	* 1.6112	* 1.6248	* 2.6049
9	* 1.4099	* 1.4034	* 1.1747	* 1.1942	* 1.0848	* 1.2257	* 1.1108	* .7673
	* 1.2617	* 1.2754	* 1.4924	* 1.4924	* 1.5807	* 1.4325	* 1.5084	* 2.2074
10	* 1.3232	* 1.1736	* 1.2051	* 1.0317	* 1.2408	* 1.2495	* 1.1010	* .6470
	* 1.3687	* 1.4941	* 1.5045	* 1.6871	* 1.4486	* 1.4288	* 1.5446	* 2.6649
11	* 1.0599	* 1.1953	* 1.0338	* 1.1401	* 1.0750	* 1.1975	* 1.0642	* .5787
	* 1.6391	* 1.4914	* 1.6845	* 1.5607	* 1.6087	* 1.4858	* 1.6299	* 3.0683
12	* 1.1487	* 1.0837	* 1.2408	* 1.0750	* 1.1487	* 1.0848	* .7564	*
	* 1.5176	* 1.5812	* 1.4486	* 1.6083	* 1.4997	* 1.5482	* 2.3176	*
13	* 1.0404	* 1.2246	* 1.2495	* 1.1986	* 1.0848	* .9927	* .5765	*
	* 1.6112	* 1.4331	* 1.4288	* 1.4852	* 1.5482	* 1.6658	* 2.9768	*
14	* 1.0501	* 1.1108	* 1.1010	* 1.0642	* .7564	* .5765	*	*
	* 1.6248	* 1.5084	* 1.5446	* 1.6299	* 2.3176	* 2.9753	*	*
15	* .6481	* .7683	* .6470	* .5787	* F-SUB-Q			
	* 2.6049	* 2.2039	* 2.6631	* 3.0683	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2181	* 1.5876	* 1.4955	* 1.2289	* 1.3145	* 1.2137	* 1.2040	* .7304
	* 1.5036	* 1.1578	* 1.2435	* 1.4430	* 1.3553	* 1.4093	* 1.4484	* 2.3658
9	* 1.5876	* 1.5790	* 1.3525	* 1.3611	* 1.2614	* 1.3980	* 1.3026	* .8756
	* 1.1578	* 1.1681	* 1.3280	* 1.3380	* 1.3869	* 1.2837	* 1.3125	* 1.9779
10	* 1.4955	* 1.3514	* 1.3730	* 1.1975	* 1.4164	* 1.4261	* 1.2939	* .7391
	* 1.2435	* 1.3296	* 1.3498	* 1.4810	* 1.2983	* 1.2792	* 1.3408	* 2.3927
11	* 1.2289	* 1.3622	* 1.2007	* 1.3102	* 1.2614	* 1.3871	* 1.2582	* .6632
	* 1.4430	* 1.3368	* 1.4800	* 1.3929	* 1.4065	* 1.3182	* 1.4111	* 2.7376
12	* 1.3145	* 1.2603	* 1.4153	* 1.2614	* 1.3503	* 1.2929	* .8724	*
	* 1.3553	* 1.3873	* 1.2991	* 1.4065	* 1.3245	* 1.3414	* 2.0698	*
13	* 1.2137	* 1.3969	* 1.4261	* 1.3871	* 1.2939	* 1.1997	* .6665	*
	* 1.4093	* 1.2845	* 1.2792	* 1.3182	* 1.3408	* 1.4271	* 2.6596	*
14	* 1.2040	* 1.3026	* 1.2939	* 1.2582	* .8724	* .6665	*	*
	* 1.4484	* 1.3125	* 1.3408	* 1.4108	* 2.0698	* 2.6596	*	*
15	* .7304	* .8778	* .7391	* .6632	* F-SUB-Q			
	* 2.3658	* 1.9744	* 2.3927	* 2.7376	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 3 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2679	* 1.6613	* 1.5768	* 1.3210	* 1.4077	* 1.3134	* 1.2907	* .7727 *
	* 1.4912	* 1.1402	* 1.2136	* 1.3675	* 1.2977	* 1.3332	* 1.3861	* 2.2948 *
9	* 1.6613	* 1.6548	* 1.4424	* 1.4511	* 1.3600	* 1.4901	* 1.4121	* .9309 *
	* 1.1402	* 1.1486	* 1.2797	* 1.2868	* 1.3152	* 1.2333	* 1.2386	* 1.9078 *
10	* 1.5768	* 1.4402	* 1.4619	* 1.2907	* 1.5096	* 1.5248	* 1.4045	* .7878 *
	* 1.2136	* 1.2817	* 1.2991	* 1.4041	* 1.2471	* 1.2289	* 1.2630	* 2.3008 *
11	* 1.3210	* 1.4522	* 1.2950	* 1.4066	* 1.3676	* 1.4944	* 1.3709	* .7087 *
	* 1.3675	* 1.2853	* 1.4032	* 1.3359	* 1.3322	* 1.2588	* 1.3292	* 2.6231 *
12	* 1.4077	* 1.3600	* 1.5085	* 1.3676	* 1.4662	* 1.4164	* .9374	*
	* 1.2977	* 1.3152	* 1.2485	* 1.3319	* 1.2601	* 1.2605	* 1.9868	*
13	* 1.3134	* 1.4890	* 1.5248	* 1.4944	* 1.4164	* 1.3232	* .7163	*
	* 1.3332	* 1.2344	* 1.2289	* 1.2584	* 1.2605	* 1.3348	* 2.5570	*
14	* 1.2907	* 1.4121	* 1.4045	* 1.3709	* .9374	* .7174	*	
	* 1.3861	* 1.2386	* 1.2630	* 1.3289	* 1.9861	* 2.5570	*	
15	* .7727	* .9331	* .7878	* .7098	* F-SUB-Q			
	* 2.2948	* 1.9045	* 2.3008	* 2.6231	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2972	* 1.7025	* 1.6245	* 1.3763	* 1.4695	* 1.3774	* 1.3470	* .7998 *
	* 1.4990	* 1.1457	* 1.2088	* 1.3402	* 1.2779	* 1.3049	* 1.3650	* 2.2801 *
9	* 1.7025	* 1.6971	* 1.4933	* 1.5063	* 1.4251	* 1.5529	* 1.4836	* .9656 *
	* 1.1457	* 1.1517	* 1.2667	* 1.2720	* 1.2874	* 1.2162	* 1.2102	* 1.8926 *
10	* 1.6245	* 1.4923	* 1.5161	* 1.3514	* 1.5735	* 1.5920	* 1.4760	* .8193 *
	* 1.2088	* 1.2681	* 1.2844	* 1.3752	* 1.2295	* 1.2109	* 1.2320	* 2.2732 *
11	* 1.3763	* 1.5085	* 1.3525	* 1.4717	* 1.4381	* 1.5670	* 1.4446	* .7391 *
	* 1.3402	* 1.2706	* 1.3743	* 1.3140	* 1.2984	* 1.2325	* 1.2899	* 2.5833 *
12	* 1.4695	* 1.4240	* 1.5724	* 1.4381	* 1.5432	* 1.4988	* .9807	*
	* 1.2779	* 1.2874	* 1.2309	* 1.2984	* 1.2350	* 1.2274	* 1.9560	*
13	* 1.3774	* 1.5508	* 1.5920	* 1.5681	* 1.4988	* 1.4045	* .7499	*
	* 1.3049	* 1.2175	* 1.2109	* 1.2318	* 1.2274	* 1.2989	* 2.5284	*
14	* 1.3470	* 1.4836	* 1.4760	* 1.4457	* .9807	* .7499	*	
	* 1.3650	* 1.2102	* 1.2320	* 1.2899	* 1.9543	* 2.5257	*	
15	* .7998	* .9677	* .8193	* .7391	* F-SUB-Q			
	* 2.2801	* 1.8886	* 2.2732	* 2.5820	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 4 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3319	* 1.7513	* 1.6787	* 1.4305	* 1.5334	* 1.4392	* 1.4077	* .8312
	* 1.5048	* 1.1447	* 1.1951	* 1.3240	* 1.2648	* 1.2871	* 1.3506	* 2.2683
9	* 1.7513	* 1.7469	* 1.5443	* 1.5659	* 1.4879	* 1.6190	* 1.5529	* 1.0035
	* 1.1447	* 1.1483	* 1.2500	* 1.2613	* 1.2675	* 1.2021	* 1.1910	* 1.8828
10	* 1.6787	* 1.5432	* 1.5735	* 1.4099	* 1.6429	* 1.6635	* 1.5454	* .8529
	* 1.1951	* 1.2515	* 1.2726	* 1.3549	* 1.2093	* 1.1917	* 1.2095	* 2.2526
11	* 1.4305	* 1.5670	* 1.4099	* 1.5378	* 1.5063	* 1.6429	* 1.5172	* .7705
	* 1.3240	* 1.2599	* 1.3546	* 1.2960	* 1.2680	* 1.2064	* 1.2523	* 2.5471
12	* 1.5334	* 1.4879	* 1.6418	* 1.5063	* 1.6201	* 1.5768	* 1.0263	*
	* 1.2648	* 1.2675	* 1.2104	* 1.2680	* 1.2117	* 1.1997	* 1.9278	*
13	* 1.4392	* 1.6180	* 1.6646	* 1.6440	* 1.5768	* 1.4814	* .7846	*
	* 1.2871	* 1.2034	* 1.1913	* 1.2058	* 1.1997	* 1.2668	* 2.4931	*
14	* 1.4077	* 1.5529	* 1.5454	* 1.5183	* 1.0273	* .7846	*	*
	* 1.3506	* 1.1910	* 1.2095	* 1.2516	* 1.9262	* 2.4931	*	*
15	* .8312	* 1.0057	* .8529	* .7705	* F-SUB-Q			
	* 2.2683	* 1.8788	* 2.2513	* 2.5471	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3405	* 1.7708	* 1.7014	* 1.4630	* 1.5681	* 1.4803	* 1.4392	* .8431
	* 1.5331	* 1.1617	* 1.2136	* 1.3406	* 1.2816	* 1.3020	* 1.3696	* 2.3205
9	* 1.7708	* 1.7664	* 1.5746	* 1.5952	* 1.5302	* 1.6559	* 1.5995	* 1.0208
	* 1.1617	* 1.1660	* 1.2661	* 1.2795	* 1.2776	* 1.2158	* 1.2010	* 1.9193
10	* 1.7014	* 1.5724	* 1.6028	* 1.4489	* 1.6819	* 1.7047	* 1.5941	* .8691
	* 1.2136	* 1.2675	* 1.2848	* 1.3643	* 1.2154	* 1.1966	* 1.2166	* 2.2845
11	* 1.4630	* 1.5974	* 1.4478	* 1.5746	* 1.5529	* 1.6895	* 1.5681	* .7857
	* 1.3406	* 1.2780	* 1.3635	* 1.2966	* 1.2670	* 1.2038	* 1.2505	* 2.5667
12	* 1.5681	* 1.5291	* 1.6808	* 1.5529	* 1.6689	* 1.6310	* 1.0523	*
	* 1.2816	* 1.2784	* 1.2165	* 1.2670	* 1.2101	* 1.1968	* 1.9256	*
13	* 1.4803	* 1.6548	* 1.7057	* 1.6906	* 1.6310	* 1.5356	* .8041	*
	* 1.3020	* 1.2171	* 1.1960	* 1.2034	* 1.1966	* 1.2655	* 2.5059	*
14	* 1.4392	* 1.5995	* 1.5941	* 1.5681	* 1.0534	* .8041	*	*
	* 1.3696	* 1.2010	* 1.2160	* 1.2498	* 1.9250	* 2.5049	*	*
15	* .8431	* 1.0230	* .8702	* .7857	* F-SUB-Q			
	* 2.3205	* 1.9152	* 2.2845	* 2.5645	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 5 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3611	* 1.8000	* 1.7328	* 1.4955	* 1.6071	* 1.5193	* 1.4760	* .8605
	* 1.5793	* 1.1904	* 1.2346	* 1.3749	* 1.3031	* 1.3332	* 1.3934	* 2.3737
9	* 1.8000	* 1.7957	* 1.6050	* 1.6299	* 1.5714	* 1.6992	* 1.6451	* 1.0414
	* 1.1904	* 1.1938	* 1.2995	* 1.3009	* 1.3028	* 1.2315	* 1.2263	* 1.9613
10	* 1.7328	* 1.6028	* 1.6353	* 1.4868	* 1.7263	* 1.7523	* 1.6396	* .8886
	* 1.2346	* 1.3010	* 1.3026	* 1.3906	* 1.2271	* 1.2058	* 1.2376	* 2.3218
11	* 1.4955	* 1.6321	* 1.4858	* 1.6158	* 1.5985	* 1.7404	* 1.6158	* .8030
	* 1.3749	* 1.2994	* 1.3904	* 1.3132	* 1.2895	* 1.2139	* 1.2682	* 2.5950
12	* 1.6071	* 1.5703	* 1.7253	* 1.5985	* 1.7198	* 1.6830	* 1.0815	*
	* 1.3031	* 1.3031	* 1.2284	* 1.2895	* 1.2221	* 1.2145	* 1.9458	*
13	* 1.5193	* 1.6971	* 1.7523	* 1.7415	* 1.6841	* 1.5865	* .8247	*
	* 1.3332	* 1.2328	* 1.2054	* 1.2135	* 1.2143	* 1.2814	* 2.5332	*
14	* 1.4760	* 1.6451	* 1.6407	* 1.6169	* 1.0815	* .8258	*	*
	* 1.3934	* 1.2263	* 1.2372	* 1.2680	* 1.9458	* 2.5321	*	*
15	* .8605	* 1.0436	* .8897	* .8030	* F-SUB-Q			
	* 2.3737	* 1.9570	* 2.3208	* 2.5950	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3600	* 1.7979	* 1.7328	* 1.4955	* 1.6158	* 1.5258	* 1.4858	* .8626
	* 1.6566	* 1.2443	* 1.2870	* 1.4503	* 1.3596	* 1.4052	* 1.4542	* 2.4837
9	* 1.7979	* 1.7946	* 1.6028	* 1.6331	* 1.5790	* 1.7101	* 1.6548	* 1.0425
	* 1.2443	* 1.2456	* 1.3680	* 1.3584	* 1.3661	* 1.2791	* 1.2879	* 2.0530
10	* 1.7328	* 1.6006	* 1.6386	* 1.4923	* 1.7393	* 1.7664	* 1.6505	* .8908
	* 1.2870	* 1.3697	* 1.3585	* 1.4599	* 1.2678	* 1.2444	* 1.2955	* 2.4185
11	* 1.4955	* 1.6353	* 1.4912	* 1.6266	* 1.6104	* 1.7578	* 1.6277	* .8052
	* 1.4503	* 1.3568	* 1.4602	* 1.3655	* 1.3451	* 1.2532	* 1.3197	* 2.6960
12	* 1.6158	* 1.5790	* 1.7383	* 1.6104	* 1.7361	* 1.6982	* 1.0891	*
	* 1.3596	* 1.3669	* 1.2690	* 1.3451	* 1.2724	* 1.2729	* 2.0226	*
13	* 1.5258	* 1.7079	* 1.7675	* 1.7588	* 1.6992	* 1.5995	* .8290	*
	* 1.4052	* 1.2809	* 1.2438	* 1.2525	* 1.2727	* 1.3442	* 2.6410	*
14	* 1.4858	* 1.6548	* 1.6505	* 1.6288	* 1.0891	* .8290	*	*
	* 1.4542	* 1.2879	* 1.2955	* 1.3189	* 2.0226	* 2.6410	*	*
15	* .8626	* 1.0447	* .8919	* .8063	* F-SUB-Q			
	* 2.4837	* 2.0494	* 2.4174	* 2.6929	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 6 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3741	* 1.8260	* 1.7610	* 1.5280	* 1.6516	* 1.5659	* 1.5161	* .8745
	* 1.7052	* 1.2780	* 1.3229	* 1.5050	* 1.4042	* 1.4563	* 1.5035	* 2.5788
9	* 1.8260	* 1.8228	* 1.6353	* 1.6646	* 1.6212	* 1.7491	* 1.7036	* 1.0599
	* 1.2780	* 1.2794	* 1.4098	* 1.3992	* 1.4115	* 1.3181	* 1.3297	* 2.1260
10	* 1.7610	* 1.6342	* 1.6689	* 1.5302	* 1.7805	* 1.8109	* 1.7003	* .9081
	* 1.3229	* 1.4106	* 1.3966	* 1.5072	* 1.3024	* 1.2757	* 1.3344	* 2.4930
11	* 1.5280	* 1.6667	* 1.5291	* 1.6635	* 1.6581	* 1.8065	* 1.6797	* .8193
	* 1.5050	* 1.3966	* 1.5074	* 1.4009	* 1.3832	* 1.2789	* 1.3541	* 2.7780
12	* 1.6516	* 1.6212	* 1.7784	* 1.6581	* 1.7859	* 1.7534	* 1.1151	*
	* 1.4042	* 1.4119	* 1.3034	* 1.3832	* 1.2977	* 1.3031	* 2.0672	*
13	* 1.5659	* 1.7469	* 1.8119	* 1.8076	* 1.7534	* 1.6537	* .8475	*
	* 1.4563	* 1.3196	* 1.2755	* 1.2783	* 1.3031	* 1.3780	* 2.7039	*
14	* 1.5161	* 1.7036	* 1.7003	* 1.6808	* 1.1151	* .8475	*	*
	* 1.5035	* 1.3297	* 1.3339	* 1.3535	* 2.0672	* 2.7031	*	*
15	* .8745	* 1.0620	* .9081	* .8204	* F-SUB-Q			
	* 2.5788	* 2.1202	* 2.4930	* 2.7772	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3741	* 1.8325	* 1.7675	* 1.5389	* 1.6656	* 1.5811	* 1.5291	* .8778
	* 1.7286	* 1.2938	* 1.3373	* 1.5232	* 1.4122	* 1.4807	* 1.5321	* 2.6595
9	* 1.8325	* 1.8293	* 1.6440	* 1.6732	* 1.6386	* 1.7664	* 1.7242	* 1.0631
	* 1.2938	* 1.2953	* 1.4335	* 1.4088	* 1.4326	* 1.3320	* 1.3593	* 2.1984
10	* 1.7675	* 1.6418	* 1.6776	* 1.5443	* 1.7989	* 1.8325	* 1.7220	* .9125
	* 1.3373	* 1.4352	* 1.4080	* 1.5272	* 1.3141	* 1.2896	* 1.3624	* 2.5720
11	* 1.5389	* 1.6765	* 1.5432	* 1.6787	* 1.6787	* 1.8325	* 1.7036	* .8247
	* 1.5232	* 1.4071	* 1.5282	* 1.4156	* 1.4059	* 1.2931	* 1.3826	* 2.8571
12	* 1.6656	* 1.6375	* 1.7979	* 1.6787	* 1.8119	* 1.7816	* 1.1260	*
	* 1.4122	* 1.4335	* 1.3156	* 1.4059	* 1.3171	* 1.3329	* 2.1094	*
13	* 1.5811	* 1.7643	* 1.8336	* 1.8336	* 1.7816	* 1.6787	* .8550	*
	* 1.4807	* 1.3343	* 1.2896	* 1.2931	* 1.3321	* 1.4170	* 2.7859	*
14	* 1.5291	* 1.7242	* 1.7220	* 1.7047	* 1.1260	* .8550	*	*
	* 1.5321	* 1.3593	* 1.3616	* 1.3826	* 2.1094	* 2.7859	*	*
15	* .8778	* 1.0664	* .9136	* .8247	* F-SUB-Q			
	* 2.6595	* 2.1922	* 2.5692	* 2.8537	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 7 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3665	* 1.8206	* 1.7567	* 1.5313	* 1.6602	* 1.5757	* 1.5258	* .8735
	* 1.7521	* 1.3131	* 1.3562	* 1.5460	* 1.4261	* 1.4997	* 1.5450	* 2.6892
9	* 1.8206	* 1.8174	* 1.6321	* 1.6646	* 1.6342	* 1.7653	* 1.7209	* 1.0577
	* 1.3131	* 1.3138	* 1.4597	* 1.4261	* 1.4507	* 1.3423	* 1.3753	* 2.2220
10	* 1.7567	* 1.6310	* 1.6678	* 1.5389	* 1.7979	* 1.8358	* 1.7198	* .9081
	* 1.3562	* 1.4615	* 1.4261	* 1.5501	* 1.3257	* 1.2986	* 1.3777	* 2.5943
11	* 1.5313	* 1.6667	* 1.5378	* 1.6743	* 1.6787	* 1.8380	* 1.7036	* .8204
	* 1.5460	* 1.4244	* 1.5511	* 1.4304	* 1.4235	* 1.3015	* 1.3990	* 2.8836
12	* 1.6602	* 1.6342	* 1.7968	* 1.6787	* 1.8152	* 1.7838	* 1.1249	*
	* 1.4261	* 1.4516	* 1.3264	* 1.4235	* 1.3272	* 1.3485	* 2.1295	*
13	* 1.5757	* 1.7621	* 1.8358	* 1.8380	* 1.7849	* 1.6797	* .8518	*
	* 1.4997	* 1.3446	* 1.2979	* 1.3007	* 1.3477	* 1.4348	* 2.8180	*
14	* 1.5258	* 1.7220	* 1.7198	* 1.7047	* 1.1249	* .8529	*	*
	* 1.5450	* 1.3744	* 1.3777	* 1.3981	* 2.1275	* 2.8147	*	*
15	* .8735	* 1.0599	* .9092	* .8214	* F-SUB-Q			
	* 2.6892	* 2.2157	* 2.5943	* 2.8801	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3774	* 1.8434	* 1.7784	* 1.5551	* 1.6862	* 1.6028	* 1.5497	* .8843
	* 1.7443	* 1.2979	* 1.3370	* 1.5112	* 1.3944	* 1.4643	* 1.5073	* 2.6185
9	* 1.8434	* 1.8412	* 1.6548	* 1.6873	* 1.6635	* 1.7946	* 1.7556	* 1.0718
	* 1.2979	* 1.2993	* 1.4365	* 1.3990	* 1.4192	* 1.3146	* 1.3415	* 2.1644
10	* 1.7784	* 1.6526	* 1.6895	* 1.5638	* 1.8304	* 1.8715	* 1.7556	* .9222
	* 1.3370	* 1.4383	* 1.4006	* 1.5201	* 1.3007	* 1.2733	* 1.3438	* 2.5258
11	* 1.5551	* 1.6895	* 1.5627	* 1.7025	* 1.7122	* 1.8770	* 1.7415	* .8323
	* 1.5112	* 1.3969	* 1.5205	* 1.4073	* 1.3948	* 1.2761	* 1.3665	* 2.8126
12	* 1.6862	* 1.6624	* 1.8293	* 1.7122	* 1.8542	* 1.8239	* 1.1455	*
	* 1.3944	* 1.4201	* 1.3015	* 1.3948	* 1.3044	* 1.3219	* 2.0860	*
13	* 1.6028	* 1.7924	* 1.8715	* 1.8770	* 1.8239	* 1.7187	* .8670	*
	* 1.4643	* 1.3168	* 1.2726	* 1.2754	* 1.3219	* 1.4065	* 2.7618	*
14	* 1.5497	* 1.7556	* 1.7556	* 1.7415	* 1.1455	* .8670	*	*
	* 1.5073	* 1.3408	* 1.3438	* 1.3657	* 2.0842	* 2.7586	*	*
15	* .8843	* 1.0750	* .9222	* .8334	* F-SUB-Q			
	* 2.6185	* 2.1584	* 2.5258	* 2.8110	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 8 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3676	* 1.8369	* 1.7729	* 1.5573	* 1.6862	* 1.6071	* 1.5497	* .8800
	* 1.7032	* 1.2617	* 1.2989	* 1.4634	* 1.3519	* 1.4158	* 1.4611	* 2.5510
9	* 1.8369	* 1.8347	* 1.6537	* 1.6830	* 1.6700	* 1.7968	* 1.7643	* 1.0696
	* 1.2617	* 1.2634	* 1.3920	* 1.3585	* 1.3709	* 1.2736	* 1.2939	* 2.1055
10	* 1.7729	* 1.6526	* 1.6862	* 1.5681	* 1.8336	* 1.8770	* 1.7653	* .9201
	* 1.2989	* 1.3936	* 1.3597	* 1.4685	* 1.2594	* 1.2314	* 1.2957	* 2.4551
11	* 1.5573	* 1.6862	* 1.5670	* 1.7025	* 1.7209	* 1.8856	* 1.7534	* .8301
	* 1.4634	* 1.3562	* 1.4699	* 1.3638	* 1.3455	* 1.2324	* 1.3158	* 2.7318
12	* 1.6862	* 1.6689	* 1.8315	* 1.7209	* 1.8629	* 1.8369	* 1.1466	*
	* 1.3519	* 1.3717	* 1.2607	* 1.3455	* 1.2650	* 1.2749	* 2.0164	*
13	* 1.6071	* 1.7946	* 1.8770	* 1.8856	* 1.8380	* 1.7328	* .8670	*
	* 1.4158	* 1.2754	* 1.2307	* 1.2317	* 1.2749	* 1.3549	* 2.6701	*
14	* 1.5497	* 1.7643	* 1.7653	* 1.7545	* 1.1476	* .8680	*	*
	* 1.4611	* 1.2939	* 1.2957	* 1.3150	* 2.0156	* 2.6687	*	*
15	* .8800	* 1.0718	* .9201	* .8301	* F-SUB-Q			
	* 2.5510	* 2.0998	* 2.4526	* 2.7304	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3535	* 1.8206	* 1.7567	* 1.5454	* 1.6732	* 1.5974	* 1.5389	* .8702
	* 1.6695	* 1.2354	* 1.2728	* 1.4331	* 1.3241	* 1.3854	* 1.4315	* 2.5094
9	* 1.8206	* 1.8184	* 1.6407	* 1.6689	* 1.6602	* 1.7849	* 1.7556	* 1.0588
	* 1.2354	* 1.2370	* 1.3629	* 1.3320	* 1.3397	* 1.2456	* 1.2633	* 2.0685
10	* 1.7567	* 1.6396	* 1.6711	* 1.5584	* 1.8239	* 1.8683	* 1.7578	* .9114
	* 1.2728	* 1.3641	* 1.3327	* 1.4359	* 1.2297	* 1.2011	* 1.2647	* 2.4104
11	* 1.5454	* 1.6711	* 1.5573	* 1.6917	* 1.7144	* 1.8791	* 1.7480	* .8214
	* 1.4331	* 1.3297	* 1.4372	* 1.3329	* 1.3114	* 1.2002	* 1.2816	* 2.6829
12	* 1.6732	* 1.6591	* 1.8217	* 1.7144	* 1.8564	* 1.8325	* 1.1390	*
	* 1.3241	* 1.3404	* 1.2309	* 1.3117	* 1.2321	* 1.2405	* 1.9700	*
13	* 1.5974	* 1.7827	* 1.8694	* 1.8791	* 1.8336	* 1.7285	* .8605	*
	* 1.3854	* 1.2476	* 1.2005	* 1.1996	* 1.2398	* 1.3181	* 2.6116	*
14	* 1.5389	* 1.7567	* 1.7578	* 1.7480	* 1.1401	* .8605	*	*
	* 1.4315	* 1.2633	* 1.2640	* 1.2809	* 1.9700	* 2.6101	*	*
15	* .8702	* 1.0609	* .9114	* .8225	* F-SUB-Q			
	* 2.5094	* 2.0631	* 2.4079	* 2.6798	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 9 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3340	* 1.7924	* 1.7285	* 1.5161	* 1.6461	* 1.5681	* 1.5150	* .8550
	* 1.6476	* 1.2205	* 1.2588	* 1.4238	* 1.3116	* 1.3754	* 1.4174	* 2.4901
9	* 1.7924	* 1.7903	* 1.6104	* 1.6396	* 1.6321	* 1.7599	* 1.7263	* 1.0382
	* 1.2205	* 1.2218	* 1.3516	* 1.3200	* 1.3276	* 1.2308	* 1.2522	* 2.0553
10	* 1.7285	* 1.6082	* 1.6429	* 1.5302	* 1.7979	* 1.8434	* 1.7285	* .8941
	* 1.2588	* 1.3531	* 1.3204	* 1.4234	* 1.2137	* 1.1841	* 1.2522	* 2.3901
11	* 1.5161	* 1.6429	* 1.5291	* 1.6656	* 1.6873	* 1.8542	* 1.7198	* .8063
	* 1.4238	* 1.3178	* 1.4247	* 1.3161	* 1.2965	* 1.1826	* 1.2675	* 2.6611
12	* 1.6461	* 1.6310	* 1.7957	* 1.6873	* 1.8315	* 1.8054	* 1.1216	*
	* 1.3116	* 1.3288	* 1.2150	* 1.2965	* 1.2136	* 1.2233	* 1.9463	*
13	* 1.5681	* 1.7567	* 1.8445	* 1.8553	* 1.8054	* 1.7003	* .8453	*
	* 1.3754	* 1.2328	* 1.1835	* 1.1820	* 1.2227	* 1.3010	* 2.5838	*
14	* 1.5150	* 1.7263	* 1.7285	* 1.7209	* 1.1227	* .8453	*	*
	* 1.4174	* 1.2515	* 1.2522	* 1.2668	* 1.9447	* 2.5822	*	*
15	* .8550	* 1.0414	* .8951	* .8074	* F-SUB-Q			
	* 2.4901	* 2.0499	* 2.3901	* 2.6597	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3199	* 1.7816	* 1.7166	* 1.5118	* 1.6364	* 1.5649	* 1.5031	* .8442
	* 1.5978	* 1.1821	* 1.2222	* 1.3836	* 1.2777	* 1.3377	* 1.3888	* 2.4628
9	* 1.7816	* 1.7794	* 1.6060	* 1.6288	* 1.6288	* 1.7491	* 1.7253	* 1.0284
	* 1.1821	* 1.1821	* 1.3059	* 1.2845	* 1.2877	* 1.1994	* 1.2151	* 2.0226
10	* 1.7166	* 1.6050	* 1.6321	* 1.5258	* 1.7892	* 1.8369	* 1.7285	* .8854
	* 1.2222	* 1.3075	* 1.2830	* 1.3773	* 1.1778	* 1.1481	* 1.2137	* 2.3525
11	* 1.5118	* 1.6321	* 1.5248	* 1.6559	* 1.6862	* 1.8510	* 1.7220	* .7976
	* 1.3836	* 1.2824	* 1.3791	* 1.2749	* 1.2513	* 1.1422	* 1.2236	* 2.6147
12	* 1.6364	* 1.6277	* 1.7870	* 1.6862	* 1.8282	* 1.8076	* 1.1151	*
	* 1.2777	* 1.2893	* 1.1789	* 1.2513	* 1.1646	* 1.1741	* 1.8879	*
13	* 1.5649	* 1.7469	* 1.8369	* 1.8510	* 1.8076	* 1.7036	* .8388	*
	* 1.3377	* 1.2012	* 1.1475	* 1.1416	* 1.1742	* 1.2470	* 2.5114	*
14	* 1.5031	* 1.7253	* 1.7285	* 1.7220	* 1.1151	* .8399	*	*
	* 1.3888	* 1.2151	* 1.2137	* 1.2229	* 1.8882	* 2.5082	*	*
15	* .8442	* 1.0306	* .8865	* .7987	* F-SUB-Q			
	* 2.4628	* 2.0174	* 2.3503	* 2.6147	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 10 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2896	* 1.7426	* 1.6776	* 1.4738	* 1.5963	* 1.5258	* 1.4641	* .8193
	* 1.5713	* 1.1637	* 1.2078	* 1.3729	* 1.2677	* 1.3275	* 1.3807	* 2.4573
9	* 1.7426	* 1.7404	* 1.5692	* 1.5887	* 1.5909	* 1.7079	* 1.6841	* .9981
	* 1.1637	* 1.1650	* 1.2912	* 1.2738	* 1.2762	* 1.1880	* 1.2054	* 2.0201
10	* 1.6776	* 1.5681	* 1.5920	* 1.4879	* 1.7480	* 1.7946	* 1.6873	* .8605
	* 1.2078	* 1.2928	* 1.2716	* 1.3653	* 1.1643	* 1.1348	* 1.2027	* 2.3451
11	* 1.4738	* 1.5920	* 1.4868	* 1.6147	* 1.6472	* 1.8098	* 1.6808	* .7738
	* 1.3729	* 1.2717	* 1.3670	* 1.2617	* 1.2371	* 1.1280	* 1.2113	* 2.6123
12	* 1.5963	* 1.5898	* 1.7458	* 1.6472	* 1.7870	* 1.7664	* 1.0870	*
	* 1.2677	* 1.2769	* 1.1662	* 1.2371	* 1.1455	* 1.1588	* 1.8719	*
13	* 1.5258	* 1.7057	* 1.7957	* 1.8098	* 1.7664	* 1.6624	* .8160	*
	* 1.3275	* 1.1898	* 1.1342	* 1.1275	* 1.1581	* 1.2312	* 2.4922	*
14	* 1.4641	* 1.6841	* 1.6873	* 1.6819	* 1.0870	* .8160	*	*
	* 1.3807	* 1.2046	* 1.2027	* 1.2106	* 1.8719	* 2.4922	*	*
15	* .8193	* 1.0013	* .8605	* .7748	* F-SUB-Q			
	* 2.4573	* 2.0149	* 2.3451	* 2.6088	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2365	* 1.6678	* 1.6006	* 1.3958	* 1.5183	* 1.4435	* 1.3893	* .7770
	* 1.5891	* 1.1794	* 1.2285	* 1.4104	* 1.2958	* 1.3649	* 1.4160	* 2.5259
9	* 1.6678	* 1.6656	* 1.4901	* 1.5118	* 1.5063	* 1.6266	* 1.5898	* .9428
	* 1.1794	* 1.1812	* 1.3205	* 1.3006	* 1.3092	* 1.2124	* 1.2404	* 2.0819
10	* 1.6006	* 1.4890	* 1.5150	* 1.4088	* 1.6646	* 1.7090	* 1.5930	* .8128
	* 1.2285	* 1.3212	* 1.2983	* 1.4017	* 1.1866	* 1.1571	* 1.2391	* 2.4169
11	* 1.3958	* 1.5150	* 1.4077	* 1.5356	* 1.5605	* 1.7209	* 1.5865	* .7304
	* 1.4104	* 1.2985	* 1.4035	* 1.2875	* 1.2680	* 1.1505	* 1.2469	* 2.6924
12	* 1.5183	* 1.5063	* 1.6635	* 1.5605	* 1.6971	* 1.6700	* 1.0295	*
	* 1.2958	* 1.3099	* 1.1885	* 1.2680	* 1.1683	* 1.1883	* 1.9183	*
13	* 1.4435	* 1.6245	* 1.7101	* 1.7220	* 1.6711	* 1.5659	* .7716	*
	* 1.3649	* 1.2143	* 1.1564	* 1.1506	* 1.1876	* 1.2676	* 2.5633	*
14	* 1.3893	* 1.5909	* 1.5930	* 1.5876	* 1.0306	* .7716	*	*
	* 1.4160	* 1.2404	* 1.2383	* 1.2462	* 1.9183	* 2.5599	*	*
15	* .7770	* .9450	* .8139	* .7304	* F-SUB-Q			
	* 2.5259	* 2.0761	* 2.4169	* 2.6930	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 11 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1823	* 1.5941	* 1.5280	* 1.3275	* 1.4500	* 1.3687	* 1.3167	* .7347
	* 1.6224	* 1.2040	* 1.2559	* 1.4490	* 1.3258	* 1.4069	* 1.4605	* 2.6134
9	* 1.5941	* 1.5909	* 1.4175	* 1.4435	* 1.4294	* 1.5486	* 1.4998	* .8876
	* 1.2040	* 1.2058	* 1.3556	* 1.3308	* 1.3492	* 1.2437	* 1.2855	* 2.1651
10	* 1.5280	* 1.4164	* 1.4467	* 1.3362	* 1.5855	* 1.6255	* 1.5020	* .7651
	* 1.2559	* 1.3573	* 1.3284	* 1.4435	* 1.2167	* 1.1880	* 1.2848	* 2.5134
11	* 1.3275	* 1.4457	* 1.3351	* 1.4619	* 1.4793	* 1.6364	* 1.4955	* .6860
	* 1.4490	* 1.3285	* 1.4443	* 1.3202	* 1.3071	* 1.1805	* 1.2918	* 2.8067
12	* 1.4500	* 1.4283	* 1.5844	* 1.4793	* 1.6169	* 1.5811	* .9764	*
	* 1.3258	* 1.3500	* 1.2179	* 1.3071	* 1.1964	* 1.2250	* 1.9783	*
13	* 1.3687	* 1.5464	* 1.6255	* 1.6375	* 1.5811	* 1.4760	* .7293	*
	* 1.4069	* 1.2458	* 1.1873	* 1.1806	* 1.2243	* 1.3128	* 2.6481	*
14	* 1.3167	* 1.4998	* 1.5020	* 1.4955	* .9764	* .7304	*	*
	* 1.4605	* 1.2855	* 1.2840	* 1.2918	* 1.9766	* 2.6445	*	*
15	* .7347	* .8908	* .7662	* .6860	* F-SUB-Q			
	* 2.6134	* 2.1591	* 2.5140	* 2.8067	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0685	* 1.4272	* 1.3752	* 1.1997	* 1.3243	* 1.2278	* 1.1834	* .6589
	* 1.7632	* 1.3204	* 1.3719	* 1.5761	* 1.4258	* 1.5414	* 1.5997	* 2.8710
9	* 1.4272	* 1.4251	* 1.2647	* 1.3113	* 1.2723	* 1.3893	* 1.3178	* .7868
	* 1.3204	* 1.3228	* 1.4927	* 1.4399	* 1.4897	* 1.3620	* 1.4390	* 2.4040
10	* 1.3752	* 1.2636	* 1.3124	* 1.1997	* 1.4218	* 1.4489	* 1.3113	* .6762
	* 1.3719	* 1.4937	* 1.4378	* 1.5791	* 1.3327	* 1.3086	* 1.4461	* 2.8046
11	* 1.1997	* 1.3134	* 1.1997	* 1.3243	* 1.3145	* 1.4652	* 1.3069	* .6047
	* 1.5761	* 1.4371	* 1.5804	* 1.4310	* 1.4438	* 1.2937	* 1.4531	* 3.1359
12	* 1.3243	* 1.2712	* 1.4207	* 1.3145	* 1.4597	* 1.4045	* .8745	*
	* 1.4258	* 1.4897	* 1.3333	* 1.4438	* 1.2994	* 1.3539	* 2.1718	*
13	* 1.2278	* 1.3871	* 1.4500	* 1.4662	* 1.4045	* 1.2961	* .6513	*
	* 1.5414	* 1.3644	* 1.3078	* 1.2939	* 1.3530	* 1.4678	* 2.9166	*
14	* 1.1834	* 1.3178	* 1.3113	* 1.3069	* .8745	* .6513	*	*
	* 1.5997	* 1.4380	* 1.4461	* 1.4522	* 2.1698	* 2.9173	*	*
15	* .6589	* .7889	* .6762	* .6047	* F-SUB-Q			
	* 2.8710	* 2.3991	* 2.8053	* 3.1367	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 12 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8670	* 1.0609	* 1.0393	* .9938	* 1.0913	* .9927	* .9439	* .5343
	* 2.1488	* 1.7553	* 1.7925	* 1.8793	* 1.7104	* 1.8829	* 1.9842	* 3.5070
9	* 1.0609	* 1.0664	* 1.0100	* 1.0252	* 1.0143	* 1.0707	* 1.0328	* .6134
	* 1.7553	* 1.7459	* 1.8471	* 1.8180	* 1.8451	* 1.7473	* 1.8135	* 3.0520
10	* 1.0393	* 1.0089	* 1.0295	* .9840	* 1.0707	* 1.0750	* 1.0100	* .5353
	* 1.7925	* 1.8489	* 1.8110	* 1.9027	* 1.7467	* 1.7431	* 1.8562	* 3.5018
11	* .9938	* 1.0273	* .9840	* 1.0295	* 1.0490	* 1.1574	* 1.0133	* .4844
	* 1.8793	* 1.8152	* 1.9027	* 1.8186	* 1.7876	* 1.6204	* 1.8515	* 3.8795
12	* 1.0913	* 1.0133	* 1.0707	* 1.0490	* 1.1867	* 1.1260	* .7098	*
	* 1.7104	* 1.8465	* 1.7496	* 1.7876	* 1.5791	* 1.6673	* 2.6439	*
13	* .9927	* 1.0696	* 1.0750	* 1.1574	* 1.1260	* 1.0111	* .5267	*
	* 1.8829	* 1.7499	* 1.7418	* 1.6193	* 1.6661	* 1.8588	* 3.5709	*
14	* .9439	* 1.0328	* 1.0100	* 1.0143	* .7098	* .5267	*	*
	* 1.9842	* 1.8138	* 1.8562	* 1.8497	* 2.6445	* 3.5709	*	*
15	* .5343	* .6145	* .5353	* .4844	* F-SUB-Q			
	* 3.5070	* 3.0481	* 3.5018	* 3.8718	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .5722	* .4497	* .4682	* .5213	* .4855	* .5115	* .4324	* .2644
	* 3.2403	* 4.1156	* 3.9524	* 3.5557	* 3.8165	* 3.6304	* 4.3039	* 7.0434
9	* .4497	* .4768	* .5137	* .4779	* .5213	* .4768	* .4508	* .2807
	* 4.1156	* 3.8858	* 3.6059	* 3.8807	* 3.5622	* 3.8949	* 4.1345	* 6.6380
10	* .4682	* .5137	* .4725	* .5137	* .4725	* .4541	* .4432	* .2763
	* 3.9524	* 3.6070	* 3.9260	* 3.6181	* 3.9339	* 4.1027	* 4.2024	* 6.7330
11	* .5213	* .4779	* .5137	* .4898	* .5364	* .4963	* .4237	* .2427
	* 3.5557	* 3.8730	* 3.6181	* 3.7968	* 3.4708	* 3.7544	* 4.4120	* 7.7030
12	* .4855	* .5213	* .4725	* .5364	* .5104	* .4963	* .3609	*
	* 3.8165	* 3.5633	* 3.9326	* 3.4708	* 3.6473	* 3.7616	* 5.1612	*
13	* .5115	* .4768	* .4541	* .4963	* .4963	* .4346	* .2666	*
	* 3.6304	* 3.8949	* 4.0956	* 3.7544	* 3.7616	* 4.3023	* 7.0224	*
14	* .4324	* .4508	* .4432	* .4237	* .3620	* .2666	*	*
	* 4.3039	* 4.1345	* 4.2024	* 4.4021	* 5.1612	* 7.0224	*	*
15	* .2644	* .2818	* .2774	* .2427	* F-SUB-Q			
	* 7.0434	* 6.6193	* 6.7369	* 7.7030	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 13 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 50 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .5158 *	* .4324 *	* .4356 *	* .4530 *	* .4302 *	* .4335 *	* .3836 *	* .2547 *
	* 3.0366 *	* 3.8719 *	* 3.8798 *	* 3.5746 *	* 3.8407 *	* 3.6467 *	* 4.2225 *	* 6.2582 *
9	* .4324 *	* .4454 *	* .4627 *	* .4335 *	* .4454 *	* .4205 *	* .3858 *	* .2688 *
	* 3.8719 *	* 3.8610 *	* 3.6049 *	* 3.8610 *	* 3.5988 *	* 3.8867 *	* 4.1042 *	* 5.9598 *
10	* .4356 *	* .4627 *	* .4378 *	* .4454 *	* .4237 *	* .4021 *	* .3804 *	* .2655 *
	* 3.8798 *	* 3.6033 *	* 3.9216 *	* 3.6958 *	* 3.9768 *	* 4.1762 *	* 4.2476 *	* 6.1352 *
11	* .4530 *	* .4335 *	* .4454 *	* .4183 *	* .4226 *	* .3966 *	* .3479 *	* .2297 *
	* 3.5746 *	* 3.8592 *	* 3.6958 *	* 4.0732 *	* 3.8048 *	* 4.1574 *	* 4.7148 *	* 7.2971 *
12	* .4302 *	* .4454 *	* .4237 *	* .4226 *	* .3739 *	* .3522 *	* .3034 *	
	* 3.8407 *	* 3.5972 *	* 3.9768 *	* 3.8048 *	* 4.0365 *	* 4.1915 *	* 5.3824 *	
13	* .4335 *	* .4205 *	* .4031 *	* .3966 *	* .3522 *	* .3078 *	* .2265 *	
	* 3.6467 *	* 3.8885 *	* 4.1762 *	* 4.1574 *	* 4.1915 *	* 4.7162 *	* 7.0013 *	
14	* .3836 *	* .3858 *	* .3804 *	* .3479 *	* .3045 *	* .2265 *		
	* 4.2225 *	* 4.1042 *	* 4.2476 *	* 4.7148 *	* 5.3692 *	* 7.0013 *		
15	* .2547 *	* .2688 *	* .2655 *	* .2297 *	F-SUB-Q			
	* 6.2582 *	* 5.9598 *	* 6.1225 *	* 7.2971 *	M-SUB-Q			

AT 100% POWER, 50 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7315 *	* 1.0057 *	* .9829 *	* .8225 *	* .9060 *	* .8063 *	* .8019 *	* .4953 *
	* 2.1703 *	* 1.7215 *	* 1.8037 *	* 2.0421 *	* 1.8732 *	* 2.0290 *	* 2.0758 *	* 3.3286 *
9	* 1.0057 *	* 1.0057 *	* .8691 *	* .9309 *	* .8236 *	* .9309 *	* .8334 *	* .5765 *
	* 1.7215 *	* 1.7255 *	* 1.9773 *	* 1.8582 *	* 2.0329 *	* 1.8411 *	* 1.9651 *	* 2.8680 *
10	* .9829 *	* .8691 *	* .9341 *	* .8084 *	* .9417 *	* .9363 *	* .8193 *	* .4953 *
	* 1.8037 *	* 1.9773 *	* 1.8828 *	* 2.0952 *	* 1.8609 *	* 1.8609 *	* 2.0285 *	* 3.4046 *
11	* .8225 *	* .9320 *	* .8095 *	* .8930 *	* .8041 *	* .8941 *	* .7792 *	* .4411 *
	* 2.0421 *	* 1.8578 *	* 2.0926 *	* 1.9518 *	* 2.0873 *	* 1.9263 *	* 2.1671 *	* 3.9180 *
12	* .9060 *	* .8236 *	* .9417 *	* .8041 *	* .8160 *	* .7889 *	* .5754 *	
	* 1.8732 *	* 2.0343 *	* 1.8609 *	* 2.0873 *	* 1.8940 *	* 2.0118 *	* 2.9401 *	
13	* .8063 *	* .9298 *	* .9363 *	* .8941 *	* .7889 *	* .7142 *	* .4389 *	
	* 2.0290 *	* 1.8411 *	* 1.8609 *	* 1.9249 *	* 2.0102 *	* 2.1880 *	* 3.7606 *	
14	* .8019 *	* .8334 *	* .8193 *	* .7792 *	* .5754 *	* .4389 *		
	* 2.0758 *	* 1.9651 *	* 2.0285 *	* 2.1649 *	* 2.9401 *	* 3.7606 *		
15	* .4953 *	* .5765 *	* .4953 *	* .4421 *	F-SUB-Q			
	* 3.3286 *	* 2.8652 *	* 3.4032 *	* 3.9180 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 14 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 50 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9580	* 1.2538	* 1.2224	* 1.0414	* 1.1238	* 1.0284	* 1.0024	* .6101
	* 1.8532	* 1.4328	* 1.4897	* 1.6477	* 1.5479	* 1.6271	* 1.7002	* 2.7638
9	* 1.2538	* 1.2549	* 1.1032	* 1.1574	* 1.0523	* 1.1639	* 1.0729	* .7250
	* 1.4328	* 1.4346	* 1.5964	* 1.5314	* 1.6271	* 1.5069	* 1.5599	* 2.3357
10	* 1.2224	* 1.1021	* 1.1596	* 1.0241	* 1.1812	* 1.1780	* 1.0620	* .6188
	* 1.4897	* 1.5976	* 1.5523	* 1.6908	* 1.5211	* 1.5151	* 1.5995	* 2.7943
11	* 1.0414	* 1.1585	* 1.0263	* 1.1162	* 1.0382	* 1.1336	* 1.0165	* .5516
	* 1.6477	* 1.5303	* 1.6882	* 1.5979	* 1.6608	* 1.5623	* 1.6974	* 3.2137
12	* 1.1238	* 1.0523	* 1.1801	* 1.0393	* 1.1140	* 1.0479	* .7196	*
	* 1.5479	* 1.6271	* 1.5214	* 1.6608	* 1.5443	* 1.5919	* 2.4236	*
13	* 1.0284	* 1.1628	* 1.1780	* 1.1346	* 1.0490	* .9623	* .5505	*
	* 1.6271	* 1.5079	* 1.5151	* 1.5613	* 1.5919	* 1.7115	* 3.0985	*
14	* 1.0024	* 1.0729	* 1.0620	* 1.0176	* .7196	* .5516	*	*
	* 1.7002	* 1.5599	* 1.5986	* 1.6974	* 2.4236	* 3.0985	*	*
15	* .6101	* .7250	* .6188	* .5516	* F-SUB-Q			
	* 2.7638	* 2.3326	* 2.7917	* 3.2124	* M-SUB-Q			

AT 100% POWER, 50 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0696	* 1.4196	* 1.3926	* 1.2300	* 1.3059	* 1.2235	* 1.1639	* .6947
	* 1.7232	* 1.3119	* 1.3433	* 1.4199	* 1.3637	* 1.3983	* 1.4983	* 2.4854
9	* 1.4196	* 1.4164	* 1.2874	* 1.3395	* 1.2430	* 1.3416	* 1.2766	* .8366
	* 1.3119	* 1.3113	* 1.4052	* 1.3539	* 1.4074	* 1.3375	* 1.3398	* 2.0713
10	* 1.3926	* 1.2853	* 1.3405	* 1.2137	* 1.3622	* 1.3557	* 1.2668	* .7152
	* 1.3433	* 1.4062	* 1.3746	* 1.4593	* 1.3501	* 1.3462	* 1.3698	* 2.4724
11	* 1.2300	* 1.3405	* 1.2159	* 1.2983	* 1.2354	* 1.3275	* 1.2170	* .6405
	* 1.4199	* 1.3531	* 1.4573	* 1.4087	* 1.4337	* 1.3728	* 1.4540	* 2.8334
12	* 1.3059	* 1.2419	* 1.3611	* 1.2354	* 1.3264	* 1.2690	* .8377	*
	* 1.3637	* 1.4083	* 1.3509	* 1.4337	* 1.3469	* 1.3608	* 2.1458	*
13	* 1.2235	* 1.3405	* 1.3557	* 1.3275	* 1.2690	* 1.1780	* .6448	*
	* 1.3983	* 1.3383	* 1.3462	* 1.3727	* 1.3608	* 1.4488	* 2.7387	*
14	* 1.1639	* 1.2766	* 1.2668	* 1.2181	* .8388	* .6448	*	*
	* 1.4983	* 1.3392	* 1.3696	* 1.4539	* 2.1458	* 2.7387	*	*
15	* .6947	* .8377	* .7152	* .6416	* F-SUB-Q			
	* 2.4854	* 2.0679	* 2.4716	* 2.8324	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 15 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 50 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1162 *	* 1.5009 *	* 1.4803 *	* 1.3416 *	* 1.4164 *	* 1.3438 *	* 1.2603 *	* .7423 *
	* 1.7083 *	* 1.2808 *	* 1.3028 *	* 1.3267 *	* 1.2910 *	* 1.3055 *	* 1.4215 *	* 2.3887 *
9	* 1.5009 *	* 1.4912 *	* 1.3861 *	* 1.4457 *	* 1.3568 *	* 1.4446 *	* 1.3991 *	* .8995 *
	* 1.2808 *	* 1.2853 *	* 1.3423 *	* 1.2852 *	* 1.3196 *	* 1.2739 *	* 1.2512 *	* 1.9809 *
10	* 1.4803 *	* 1.3850 *	* 1.4446 *	* 1.3286 *	* 1.4662 *	* 1.4587 *	* 1.3904 *	* .7716 *
	* 1.3028 *	* 1.3439 *	* 1.3086 *	* 1.3652 *	* 1.2862 *	* 1.2840 *	* 1.2772 *	* 2.3536 *
11	* 1.3416 *	* 1.4478 *	* 1.3319 *	* 1.4088 *	* 1.3557 *	* 1.4435 *	* 1.3395 *	* .6936 *
	* 1.3267 *	* 1.2845 *	* 1.3632 *	* 1.3366 *	* 1.3439 *	* 1.3022 *	* 1.3582 *	* 2.6865 *
12	* 1.4164 *	* 1.3568 *	* 1.4652 *	* 1.3557 *	* 1.4565 *	* 1.4056 *	* .9092 *	
	* 1.2910 *	* 1.3196 *	* 1.2875 *	* 1.3439 *	* 1.2685 *	* 1.2665 *	* 2.0417 *	
13	* 1.3438 *	* 1.4424 *	* 1.4597 *	* 1.4435 *	* 1.4066 *	* 1.3134 *	* .7001 *	
	* 1.3055 *	* 1.2752 *	* 1.2840 *	* 1.3014 *	* 1.2659 *	* 1.3414 *	* 2.6088 *	
14	* 1.2603 *	* 1.4001 *	* 1.3904 *	* 1.3405 *	* .9092 *	* .7001 *		
	* 1.4215 *	* 1.2512 *	* 1.2772 *	* 1.3581 *	* 2.0417 *	* 2.6062 *		
15	* .7423 *	* .9006 *	* .7716 *	* .6936 *	F-SUB-Q			
	* 2.3887 *	* 1.9774 *	* 2.3517 *	* 2.6865 *	M-SUB-Q			

AT 100% POWER, 50 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1455 *	* 1.5497 *	* 1.5367 *	* 1.4175 *	* 1.4955 *	* 1.4251 *	* 1.3275 *	* .7759 *
	* 1.7142 *	* 1.2752 *	* 1.2828 *	* 1.2867 *	* 1.2597 *	* 1.2656 *	* 1.3904 *	* 2.3565 *
9	* 1.5497 *	* 1.5367 *	* 1.4478 *	* 1.5183 *	* 1.4359 *	* 1.5172 *	* 1.4836 *	* .9428 *
	* 1.2752 *	* 1.2846 *	* 1.3131 *	* 1.2581 *	* 1.2791 *	* 1.2468 *	* 1.2132 *	* 1.9512 *
10	* 1.5367 *	* 1.4457 *	* 1.5150 *	* 1.4066 *	* 1.5399 *	* 1.5345 *	* 1.4749 *	* .8106 *
	* 1.2828 *	* 1.3115 *	* 1.2835 *	* 1.3233 *	* 1.2592 *	* 1.2580 *	* 1.2363 *	* 2.3054 *
11	* 1.4175 *	* 1.5204 *	* 1.4088 *	* 1.4890 *	* 1.4392 *	* 1.5269 *	* 1.4240 *	* .7293 *
	* 1.2867 *	* 1.2569 *	* 1.3227 *	* 1.3034 *	* 1.2998 *	* 1.2672 *	* 1.3101 *	* 2.6239 *
12	* 1.4955 *	* 1.4348 *	* 1.5389 *	* 1.4392 *	* 1.5475 *	* 1.5020 *	* .9602 *	
	* 1.2597 *	* 1.2786 *	* 1.2606 *	* 1.2998 *	* 1.2334 *	* 1.2235 *	* 1.9973 *	
13	* 1.4251 *	* 1.5161 *	* 1.5345 *	* 1.5269 *	* 1.5020 *	* 1.4077 *	* .7402 *	
	* 1.2656 *	* 1.2475 *	* 1.2578 *	* 1.2666 *	* 1.2235 *	* 1.2954 *	* 2.5604 *	
14	* 1.3275 *	* 1.4836 *	* 1.4749 *	* 1.4251 *	* .9602 *	* .7402 *		
	* 1.3904 *	* 1.2127 *	* 1.2361 *	* 1.3095 *	* 1.9970 *	* 2.5580 *		
15	* .7759 *	* .9450 *	* .8106 *	* .7293 *	F-SUB-Q			
	* 2.3565 *	* 1.9466 *	* 2.3048 *	* 2.6231 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 16 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 50 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1791	* 1.6050	* 1.5974	* 1.4944	* 1.5746	* 1.5042	* 1.3969	* .8117 *
	* 1.7184	* 1.2613	* 1.2673	* 1.2605	* 1.2386	* 1.2389	* 1.3682	* 2.3345 *
9	* 1.6050	* 1.5930	* 1.5074	* 1.5920	* 1.5118	* 1.5930	* 1.5659	* .9883 *
	* 1.2613	* 1.2716	* 1.2900	* 1.2386	* 1.2520	* 1.2264	* 1.1863	* 1.9296 *
10	* 1.5974	* 1.5063	* 1.5855	* 1.4825	* 1.6169	* 1.6125	* 1.5562	* .8507 *
	* 1.2673	* 1.2880	* 1.2634	* 1.2939	* 1.2367	* 1.2356	* 1.2064	* 2.2682 *
11	* 1.4944	* 1.5930	* 1.4825	* 1.5692	* 1.5193	* 1.6104	* 1.5063	* .7662 *
	* 1.2605	* 1.2378	* 1.2933	* 1.2778	* 1.2639	* 1.2368	* 1.2664	* 2.5718 *
12	* 1.5746	* 1.5118	* 1.6158	* 1.5204	* 1.6386	* 1.5941	* 1.0122	*
	* 1.2386	* 1.2520	* 1.2374	* 1.2633	* 1.2036	* 1.1887	* 1.9597	*
13	* 1.5042	* 1.5909	* 1.6136	* 1.6115	* 1.5941	* 1.4966	* .7803	*
	* 1.2389	* 1.2271	* 1.2356	* 1.2366	* 1.1887	* 1.2559	* 2.5105	*
14	* 1.3969	* 1.5659	* 1.5573	* 1.5074	* 1.0122	* .7803	*	
	* 1.3682	* 1.1858	* 1.2062	* 1.2657	* 1.9584	* 2.5105	*	
15	* .8117	* .9894	* .8507	* .7673	* F-SUB-Q			
	* 2.3345	* 1.9263	* 2.2682	* 2.5689	* M-SUB-Q			

AT 100% POWER, 50 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1877	* 1.6310	* 1.6266	* 1.5464	* 1.6223	* 1.5594	* 1.4381	* .8290 *
	* 1.7559	* 1.2812	* 1.2835	* 1.2693	* 1.2500	* 1.2471	* 1.3825	* 2.3785 *
9	* 1.6310	* 1.6190	* 1.5454	* 1.6331	* 1.5649	* 1.6375	* 1.6234	* 1.0122 *
	* 1.2812	* 1.2911	* 1.3002	* 1.2512	* 1.2592	* 1.2377	* 1.1913	* 1.9567 *
10	* 1.6266	* 1.5443	* 1.6255	* 1.5345	* 1.6635	* 1.6602	* 1.6147	* .8724 *
	* 1.2835	* 1.2986	* 1.2738	* 1.2983	* 1.2385	* 1.2397	* 1.2087	* 2.2905 *
11	* 1.5464	* 1.6353	* 1.5345	* 1.6180	* 1.5768	* 1.6646	* 1.5649	* .7868 *
	* 1.2693	* 1.2500	* 1.2981	* 1.2729	* 1.2570	* 1.2317	* 1.2606	* 2.5762 *
12	* 1.6223	* 1.5649	* 1.6624	* 1.5768	* 1.6971	* 1.6602	* 1.0436	*
	* 1.2500	* 1.2598	* 1.2399	* 1.2570	* 1.1988	* 1.1824	* 1.9545	*
13	* 1.5594	* 1.6364	* 1.6602	* 1.6656	* 1.6602	* 1.5616	* .8041	*
	* 1.2471	* 1.2384	* 1.2396	* 1.2310	* 1.1819	* 1.2493	* 2.5165	*
14	* 1.4381	* 1.6234	* 1.6158	* 1.5659	* 1.0436	* .8052	*	
	* 1.3825	* 1.1913	* 1.2087	* 1.2604	* 1.9532	* 2.5137	*	
15	* .8290	* 1.0143	* .8735	* .7868	* F-SUB-Q			
	* 2.3785	* 1.9534	* 2.2905	* 2.5762	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 17 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 50 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2040	* 1.6613	* 1.6613	* 1.5952	* 1.6711	* 1.6093	* 1.4814	* .8496 *
	* 1.8124	* 1.3047	* 1.3007	* 1.2965	* 1.2675	* 1.2727	* 1.4037	* 2.4262 *
9	* 1.6613	* 1.6505	* 1.5811	* 1.6776	* 1.6147	* 1.6862	* 1.6776	* 1.0382 *
	* 1.3047	* 1.3128	* 1.3286	* 1.2700	* 1.2809	* 1.2544	* 1.2134	* 1.9911 *
10	* 1.6613	* 1.5800	* 1.6700	* 1.5833	* 1.7133	* 1.7101	* 1.6700	* .8973 *
	* 1.3007	* 1.3264	* 1.2887	* 1.3182	* 1.2479	* 1.2483	* 1.2272	* 2.3222 *
11	* 1.5952	* 1.6797	* 1.5833	* 1.6689	* 1.6310	* 1.7209	* 1.6201	* .8084 *
	* 1.2965	* 1.2687	* 1.3182	* 1.2857	* 1.2741	* 1.2397	* 1.2766	* 2.5988 *
12	* 1.6711	* 1.6147	* 1.7122	* 1.6310	* 1.7578	* 1.7220	* 1.0761	*
	* 1.2675	* 1.2817	* 1.2493	* 1.2741	* 1.2089	* 1.1972	* 1.9709	*
13	* 1.6093	* 1.6841	* 1.7112	* 1.7209	* 1.7220	* 1.6223	* .8290	*
	* 1.2727	* 1.2556	* 1.2480	* 1.2391	* 1.1972	* 1.2602	* 2.5362	*
14	* 1.4814	* 1.6776	* 1.6700	* 1.6212	* 1.0772	* .8301	*	*
	* 1.4037	* 1.2130	* 1.2268	* 1.2763	* 1.9709	* 2.5340	*	*
15	* .8496	* 1.0404	* .8973	* .8084	* F-SUB-Q			
	* 2.4262	* 1.9877	* 2.3205	* 2.5975	* M-SUB-Q			

AT 100% POWER, 50 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2007	* 1.6613	* 1.6635	* 1.6050	* 1.6862	* 1.6223	* 1.4944	* .8540 *
	* 1.8967	* 1.3627	* 1.3595	* 1.3657	* 1.3207	* 1.3391	* 1.4643	* 2.5367 *
9	* 1.6613	* 1.6516	* 1.5811	* 1.6895	* 1.6277	* 1.7003	* 1.6906	* 1.0425 *
	* 1.3627	* 1.3711	* 1.3993	* 1.3243	* 1.3431	* 1.3039	* 1.2737	* 2.0788 *
10	* 1.6635	* 1.5833	* 1.6797	* 1.5963	* 1.7296	* 1.7274	* 1.6841	* .9027 *
	* 1.3595	* 1.3964	* 1.3423	* 1.3825	* 1.2923	* 1.2891	* 1.2839	* 2.4145 *
11	* 1.6050	* 1.6917	* 1.5952	* 1.6862	* 1.6461	* 1.7415	* 1.6353	* .8139 *
	* 1.3657	* 1.3234	* 1.3829	* 1.3340	* 1.3315	* 1.2807	* 1.3280	* 2.6942 *
12	* 1.6862	* 1.6266	* 1.7285	* 1.6461	* 1.7794	* 1.7426	* 1.0870	*
	* 1.3207	* 1.3433	* 1.2930	* 1.3315	* 1.2570	* 1.2542	* 2.0468	*
13	* 1.6223	* 1.6992	* 1.7285	* 1.7415	* 1.7437	* 1.6418	* .8366	*
	* 1.3391	* 1.3054	* 1.2888	* 1.2804	* 1.2540	* 1.3196	* 2.6413	*
14	* 1.4944	* 1.6917	* 1.6852	* 1.6364	* 1.0870	* .8366	*	*
	* 1.4643	* 1.2731	* 1.2839	* 1.3273	* 2.0468	* 2.6390	*	*
15	* .8540	* 1.0447	* .9027	* .8139	* F-SUB-Q			
	* 2.5367	* 2.0751	* 2.4138	* 2.6942	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 18 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 50 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2116	* 1.6852	* 1.6906	* 1.6505	* 1.7274	* 1.6711	* 1.5280	* .8680
	* 1.9588	* 1.4017	* 1.3966	* 1.4106	* 1.3632	* 1.3864	* 1.5136	* 2.6343
9	* 1.6852	* 1.6754	* 1.6223	* 1.7274	* 1.6754	* 1.7404	* 1.7437	* 1.0631
	* 1.4017	* 1.4093	* 1.4370	* 1.3640	* 1.3875	* 1.3457	* 1.3149	* 2.1489
10	* 1.6906	* 1.6255	* 1.7155	* 1.6440	* 1.7708	* 1.7708	* 1.7393	* .9211
	* 1.3966	* 1.4344	* 1.3752	* 1.4211	* 1.3299	* 1.3258	* 1.3217	* 2.4875
11	* 1.6505	* 1.7285	* 1.6429	* 1.7285	* 1.6982	* 1.7903	* 1.6906	* .8301
	* 1.4106	* 1.3624	* 1.4220	* 1.3683	* 1.3673	* 1.3085	* 1.3632	* 2.7765
12	* 1.7274	* 1.6743	* 1.7697	* 1.6982	* 1.8336	* 1.8044	* 1.1140	*
	* 1.3632	* 1.3881	* 1.3306	* 1.3673	* 1.2822	* 1.2844	* 2.0929	*
13	* 1.6711	* 1.7383	* 1.7708	* 1.7914	* 1.8044	* 1.7036	* .8572	*
	* 1.3864	* 1.3478	* 1.3255	* 1.3077	* 1.2837	* 1.3510	* 2.7042	*
14	* 1.5280	* 1.7448	* 1.7393	* 1.6917	* 1.1151	* .8572	*	*
	* 1.5136	* 1.3149	* 1.3217	* 1.3624	* 2.0918	* 2.7029	*	*
15	* .8680	* 1.0653	* .9211	* .8301	* F-SUB-Q			
	* 2.6343	* 2.1449	* 2.4875	* 2.7751	* M-SUB-Q			

AT 100% POWER, 50 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2072	* 1.6852	* 1.6938	* 1.6656	* 1.7437	* 1.6895	* 1.5399	* .8713
	* 1.9845	* 1.4165	* 1.4063	* 1.4221	* 1.3638	* 1.4008	* 1.5382	* 2.7118
9	* 1.6852	* 1.6765	* 1.6342	* 1.7393	* 1.6927	* 1.7556	* 1.7653	* 1.0685
	* 1.4165	* 1.4234	* 1.4531	* 1.3686	* 1.4025	* 1.3559	* 1.3413	* 2.2171
10	* 1.6938	* 1.6375	* 1.7253	* 1.6602	* 1.7892	* 1.7892	* 1.7632	* .9276
	* 1.4063	* 1.4504	* 1.3823	* 1.4361	* 1.3373	* 1.3366	* 1.3459	* 2.5608
11	* 1.6656	* 1.7404	* 1.6602	* 1.7458	* 1.7242	* 1.8163	* 1.7133	* .8355
	* 1.4221	* 1.3670	* 1.4370	* 1.3766	* 1.3883	* 1.3223	* 1.3908	* 2.8537
12	* 1.7437	* 1.6927	* 1.7870	* 1.7242	* 1.8607	* 1.8336	* 1.1260	*
	* 1.3638	* 1.4025	* 1.3389	* 1.3883	* 1.2974	* 1.3105	* 2.1344	*
13	* 1.6895	* 1.7534	* 1.7892	* 1.8174	* 1.8347	* 1.7318	* .8648	*
	* 1.4008	* 1.3575	* 1.3366	* 1.3215	* 1.3105	* 1.3900	* 2.7859	*
14	* 1.5399	* 1.7653	* 1.7632	* 1.7144	* 1.1260	* .8659	*	*
	* 1.5382	* 1.3413	* 1.3459	* 1.3900	* 2.1344	* 2.7859	*	*
15	* .8713	* 1.0707	* .9276	* .8355	* F-SUB-Q			
	* 2.7118	* 2.2108	* 2.5608	* 2.8502	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 19 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OF MARGIN) - NORMAL OPERATION

AT 100% POWER, 50 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1942	* 1.6678	* 1.6797	* 1.6559	* 1.7361	* 1.6819	* 1.5356	* .8659
	* 2.0146	* 1.4383	* 1.4252	* 1.4427	* 1.3753	* 1.4192	* 1.5501	* 2.7393
9	* 1.6678	* 1.6602	* 1.6223	* 1.7296	* 1.6862	* 1.7502	* 1.7599	* 1.0620
	* 1.4383	* 1.4445	* 1.4771	* 1.3825	* 1.4201	* 1.3665	* 1.3562	* 2.2389
10	* 1.6797	* 1.6255	* 1.7155	* 1.6537	* 1.7838	* 1.7859	* 1.7588	* .9222
	* 1.4252	* 1.4734	* 1.3973	* 1.4570	* 1.3492	* 1.3477	* 1.3617	* 2.5829
11	* 1.6559	* 1.7318	* 1.6526	* 1.7404	* 1.7242	* 1.8184	* 1.7112	* .8312
	* 1.4427	* 1.3809	* 1.4579	* 1.3899	* 1.4056	* 1.3317	* 1.4073	* 2.8766
12	* 1.7361	* 1.6852	* 1.7827	* 1.7242	* 1.8629	* 1.8347	* 1.1238	*
	* 1.3753	* 1.4209	* 1.3508	* 1.4056	* 1.3073	* 1.3257	* 2.1528	*
13	* 1.6819	* 1.7480	* 1.7859	* 1.8195	* 1.8347	* 1.7328	* .8626	*
	* 1.4192	* 1.3681	* 1.3469	* 1.3309	* 1.3257	* 1.4056	* 2.8147	*
14	* 1.5356	* 1.7599	* 1.7599	* 1.7122	* 1.1238	* .8626	*	*
	* 1.5501	* 1.3562	* 1.3609	* 1.4065	* 2.1528	* 2.8147	*	*
15	* .8659	* 1.0642	* .9233	* .8312	* F-SUB-Q			
	* 2.7393	* 2.2346	* 2.5801	* 2.8766	* M-SUB-Q			

AT 100% POWER, 50 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1975	* 1.6808	* 1.6960	* 1.6787	* 1.7588	* 1.7079	* 1.5562	* .8745
	* 1.9855	* 1.4091	* 1.3909	* 1.4025	* 1.3399	* 1.3785	* 1.5067	* 2.6585
9	* 1.6808	* 1.6732	* 1.6429	* 1.7491	* 1.7122	* 1.7740	* 1.7903	* 1.0739
	* 1.4091	* 1.4126	* 1.4377	* 1.3485	* 1.3839	* 1.3345	* 1.3174	* 2.1729
10	* 1.6960	* 1.6461	* 1.7339	* 1.6787	* 1.8098	* 1.8130	* 1.7924	* .9341
	* 1.3909	* 1.4350	* 1.3643	* 1.4210	* 1.3221	* 1.3199	* 1.3232	* 2.5057
11	* 1.6787	* 1.7513	* 1.6776	* 1.7653	* 1.7578	* 1.8531	* 1.7448	* .8410
	* 1.4025	* 1.3470	* 1.4201	* 1.3657	* 1.3746	* 1.3051	* 1.3715	* 2.7970
12	* 1.7588	* 1.7112	* 1.8087	* 1.7588	* 1.8976	* 1.8715	* 1.1411	*
	* 1.3399	* 1.3841	* 1.3230	* 1.3746	* 1.2809	* 1.2979	* 2.1073	*
13	* 1.7079	* 1.7718	* 1.8141	* 1.8531	* 1.8726	* 1.7718	* .8756	*
	* 1.3785	* 1.3354	* 1.3199	* 1.3044	* 1.2979	* 1.3720	* 2.7533	*
14	* 1.5562	* 1.7903	* 1.7924	* 1.7448	* 1.1422	* .8756	*	*
	* 1.5067	* 1.3167	* 1.3232	* 1.3707	* 2.1069	* 2.7533	*	*
15	* .8745	* 1.0772	* .9352	* .8420	* F-SUB-Q			
	* 2.6585	* 2.1669	* 2.5057	* 2.7970	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 20 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 50 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1812	* 1.6656	* 1.6830	* 1.6754	* 1.7523	* 1.7057	* 1.5508	* .8680 *
	* 1.9432	* 1.3730	* 1.3534	* 1.3581	* 1.2996	* 1.3333	* 1.4620	* 2.5914 *
9	* 1.6656	* 1.6591	* 1.6375	* 1.7404	* 1.7112	* 1.7675	* 1.7924	* 1.0674 *
	* 1.3730	* 1.3754	* 1.3940	* 1.3097	* 1.3370	* 1.2936	* 1.2714	* 2.1120 *
10	* 1.6830	* 1.6407	* 1.7242	* 1.6765	* 1.8044	* 1.8098	* 1.7968	* .9298 *
	* 1.3534	* 1.3907	* 1.3252	* 1.3748	* 1.2794	* 1.2765	* 1.2754	* 2.4337 *
11	* 1.6754	* 1.7426	* 1.6754	* 1.7599	* 1.7643	* 1.8553	* 1.7502	* .8366 *
	* 1.3581	* 1.3077	* 1.3743	* 1.3214	* 1.3252	* 1.2592	* 1.3200	* 2.7165 *
12	* 1.7523	* 1.7101	* 1.8033	* 1.7643	* 1.8986	* 1.8802	* 1.1390	*
	* 1.2996	* 1.3376	* 1.2807	* 1.3252	* 1.2447	* 1.2516	* 2.0361	*
13	* 1.7057	* 1.7653	* 1.8098	* 1.8564	* 1.8802	* 1.7816	* .8735	*
	* 1.3333	* 1.2945	* 1.2764	* 1.2587	* 1.2516	* 1.3224	* 2.6626	*
14	* 1.5508	* 1.7924	* 1.7968	* 1.7502	* 1.1401	* .8735	*	
	* 1.4620	* 1.2708	* 1.2754	* 1.3193	* 2.0358	* 2.6626	*	
15	* .8680	* 1.0707	* .9298	* .8366	* F-SUB-Q			
	* 2.5914	* 2.1063	* 2.4317	* 2.7159	* M-SUB-Q			

AT 100% POWER, 50 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1596	* 1.6386	* 1.6559	* 1.6537	* 1.7285	* 1.6862	* 1.5302	* .8540 *
	* 1.9152	* 1.3503	* 1.3319	* 1.3341	* 1.2759	* 1.3075	* 1.4349	* 2.5522 *
9	* 1.6386	* 1.6321	* 1.6136	* 1.7144	* 1.6917	* 1.7458	* 1.7740	* 1.0523 *
	* 1.3503	* 1.3540	* 1.3695	* 1.2870	* 1.3102	* 1.2686	* 1.2447	* 2.0777 *
10	* 1.6559	* 1.6180	* 1.6982	* 1.6570	* 1.7838	* 1.7903	* 1.7794	* .9168 *
	* 1.3319	* 1.3665	* 1.3026	* 1.3473	* 1.2524	* 1.2490	* 1.2472	* 2.3923 *
11	* 1.6537	* 1.7177	* 1.6559	* 1.7383	* 1.7491	* 1.8401	* 1.7339	* .8236 *
	* 1.3341	* 1.2856	* 1.3480	* 1.2946	* 1.2946	* 1.2293	* 1.2884	* 2.6724 *
12	* 1.7285	* 1.6906	* 1.7816	* 1.7502	* 1.8813	* 1.8650	* 1.1260	*
	* 1.2759	* 1.3109	* 1.2537	* 1.2946	* 1.2149	* 1.2201	* 1.9926	*
13	* 1.6862	* 1.7437	* 1.7914	* 1.8401	* 1.8650	* 1.7686	* .8615	*
	* 1.3075	* 1.2701	* 1.2483	* 1.2293	* 1.2196	* 1.2877	* 2.6067	*
14	* 1.5302	* 1.7740	* 1.7805	* 1.7350	* 1.1260	* .8626	*	
	* 1.4349	* 1.2442	* 1.2472	* 1.2877	* 1.9913	* 2.6067	*	
15	* .8540	* 1.0544	* .9168	* .8247	* F-SUB-Q			
	* 2.5522	* 2.0726	* 2.3923	* 2.6694	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 21 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 50 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1314	* 1.5985	* 1.6147	* 1.6082	* 1.6884	* 1.6418	* 1.4966	* .8334
	* 1.9028	* 1.3429	* 1.3265	* 1.3321	* 1.2688	* 1.3042	* 1.4262	* 2.5432
9	* 1.5985	* 1.5909	* 1.5692	* 1.6732	* 1.6494	* 1.7079	* 1.7296	* 1.0252
	* 1.3429	* 1.3475	* 1.3682	* 1.2811	* 1.3048	* 1.2585	* 1.2393	* 2.0709
10	* 1.6147	* 1.5724	* 1.6570	* 1.6136	* 1.7448	* 1.7534	* 1.7372	* .8930
	* 1.3265	* 1.3651	* 1.2965	* 1.3420	* 1.2418	* 1.2361	* 1.2400	* 2.3823
11	* 1.6082	* 1.6754	* 1.6125	* 1.6992	* 1.7090	* 1.8033	* 1.6938	* .8030
	* 1.3321	* 1.2798	* 1.3427	* 1.2794	* 1.2819	* 1.2113	* 1.2789	* 2.6594
12	* 1.6884	* 1.6483	* 1.7437	* 1.7090	* 1.8423	* 1.8239	* 1.1010	*
	* 1.2688	* 1.3055	* 1.2426	* 1.2819	* 1.1957	* 1.2030	* 1.9700	*
13	* 1.6418	* 1.7057	* 1.7545	* 1.8033	* 1.8239	* 1.7274	* .8410	*
	* 1.3042	* 1.2604	* 1.2359	* 1.2107	* 1.2024	* 1.2667	* 2.5802	*
14	* 1.4966	* 1.7296	* 1.7372	* 1.6949	* 1.1010	* .8420	*	*
	* 1.4262	* 1.2388	* 1.2398	* 1.2782	* 1.9683	* 2.5755	*	*
15	* .8334	* 1.0284	* .8941	* .8041	* F-SUB-Q			
	* 2.5432	* 2.0657	* 2.3804	* 2.6564	* M-SUB-Q			

AT 100% POWER, 50 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1097	* 1.5724	* 1.5865	* 1.5887	* 1.6613	* 1.6234	* 1.4717	* .8149
	* 1.8640	* 1.3135	* 1.3017	* 1.3026	* 1.2452	* 1.2749	* 1.4046	* 2.5237
9	* 1.5724	* 1.5638	* 1.5486	* 1.6451	* 1.6321	* 1.6819	* 1.7133	* 1.0068
	* 1.3135	* 1.3212	* 1.3357	* 1.2576	* 1.2716	* 1.2341	* 1.2097	* 2.0452
10	* 1.5865	* 1.5529	* 1.6288	* 1.5941	* 1.7209	* 1.7307	* 1.7231	* .8778
	* 1.3017	* 1.3327	* 1.2712	* 1.3041	* 1.2099	* 1.2043	* 1.2058	* 2.3497
11	* 1.5887	* 1.6472	* 1.5930	* 1.6732	* 1.6960	* 1.7849	* 1.6808	* .7878
	* 1.3026	* 1.2563	* 1.3060	* 1.2475	* 1.2375	* 1.1742	* 1.2381	* 2.6202
12	* 1.6613	* 1.6310	* 1.7187	* 1.6960	* 1.8228	* 1.8109	* 1.0848	*
	* 1.2452	* 1.2723	* 1.2111	* 1.2375	* 1.1548	* 1.1599	* 1.9193	*
13	* 1.6234	* 1.6797	* 1.7307	* 1.7849	* 1.8109	* 1.7177	* .8290	*
	* 1.2749	* 1.2360	* 1.2037	* 1.1736	* 1.1603	* 1.2216	* 2.5155	*
14	* 1.4717	* 1.7144	* 1.7242	* 1.6819	* 1.0859	* .8290	*	*
	* 1.4046	* 1.2087	* 1.2052	* 1.2375	* 1.9167	* 2.5128	*	*
15	* .8149	* 1.0100	* .8789	* .7889	* F-SUB-Q			
	* 2.5237	* 2.0428	* 2.3457	* 2.6173	* M-SUB-Q			

CNEI-0400-24
Appendix A, Rev. 18
Page 22 of 268

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

	H	G	F	E	D	C	B	A
8	1.0729	1.5204	1.5302	1.5302	1.6017	1.5649	1.4186	.7835
	1.8560	1.1314	1.3042	1.3078	1.2481	1.2786	1.4095	2.5425
9	1.5204	1.5118	1.4923	1.5855	1.5746	1.6255	1.6537	.9677
	1.3114	1.3200	1.3404	1.2601	1.2738	1.2339	1.2115	2.0611
10	1.5302	1.4955	1.5703	1.5367	1.6624	1.6732	1.6646	.8442
	1.3042	1.3373	1.2736	1.3071	1.2089	1.2011	1.2063	2.3652
11	1.5302	1.5887	1.5356	1.6136	1.6375	1.7263	1.6245	.7575
	1.3078	1.2588	1.3078	1.2465	1.2332	1.1685	1.2371	2.6386
12	1.6017	1.5746	1.6613	1.6386	1.7621	1.7502	1.0469	
	1.2481	1.2745	1.2102	1.2337	1.1474	1.1551	1.9186	
13	1.5649	1.6223	1.6743	1.7274	1.7502	1.6591	.7976	
	1.2786	1.2348	1.2015	1.1679	1.1541	1.2174	2.5215	
14	1.4186	1.6548	1.6646	1.6255	1.0479	.7987		
	1.4095	1.2104	1.2056	1.2365	1.9196	2.5170		
15	.7835	.9710	.8453	.7575	F-SUB-Q			
	2.5425	2.0557	2.3612	2.6386	M-SUB-Q			

	H	G	F	E	D	C	B	A
8	* 1.0176	* 1.4370	* 1.4402	* 1.4261	* 1.5031	* 1.4587	* 1.3297	* .7347
	* 1.8998	* 1.3469	* 1.3451	* 1.3622	* 1.2926	* 1.3339	* 1.4601	* 2.6374
9	* 1.4370	* 1.4272	* 1.3904	* 1.4879	* 1.4717	* 1.5302	* 1.5421	* .9038
	* 1.3469	* 1.3567	* 1.3970	* 1.3048	* 1.3239	* 1.2728	* 1.2632	* 2.1482
10	* 1.4402	* 1.3936	* 1.4738	* 1.4327	* 1.5649	* 1.5757	* 1.5497	* .7878
	* 1.3451	* 1.3932	* 1.3172	* 1.3617	* 1.2462	* 1.2379	* 1.2571	* 2.4676
11	* 1.4261	* 1.4901	* 1.4305	* 1.5139	* 1.5269	* 1.6201	* 1.5139	* .7055
	* 1.3622	* 1.3038	* 1.3625	* 1.2897	* 1.2817	* 1.2067	* 1.2888	* 2.7581
12	* 1.5031	* 1.4706	* 1.5638	* 1.5280	* 1.6526	* 1.6331	* .9807	*
	* 1.2926	* 1.3251	* 1.2475	* 1.2822	* 1.1842	* 1.1989	* 1.9888	*
13	* 1.4587	* 1.5269	* 1.5768	* 1.6212	* 1.6331	* 1.5421	* .7456	*
	* 1.3339	* 1.2748	* 1.2372	* 1.2072	* 1.1989	* 1.2704	* 2.6197	*
14	* 1.3297	* 1.5421	* 1.5508	* 1.5150	* .9818	* .7456	*	*
	* 1.4601	* 1.2621	* 1.2576	* 1.2876	* 1.9859	* 2.6197	*	*
15	* .7347	* .9060	* .7878	* .7066	* F-SUB-Q			
	* 2.6374	* 2.1442	* 2.4650	* 2.7527	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 23 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 50 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9634	* 1.3579	* 1.3579	* 1.3330	* 1.4131	* 1.3622	* 1.2441	* .6860
	* 1.9599	* 1.3928	* 1.3928	* 1.4249	* 1.3427	* 1.3959	* 1.5280	* 2.7655
9	* 1.3579	* 1.3460	* 1.2994	* 1.3980	* 1.3763	* 1.4370	* 1.4359	* .8388
	* 1.3928	* 1.4042	* 1.4597	* 1.3564	* 1.3833	* 1.3233	* 1.3266	* 2.2668
10	* 1.3579	* 1.3026	* 1.3839	* 1.3362	* 1.4717	* 1.4803	* 1.4402	* .7315
	* 1.3928	* 1.4570	* 1.3690	* 1.4252	* 1.2939	* 1.2864	* 1.3233	* 2.5993
11	* 1.3330	* 1.4001	* 1.3351	* 1.4186	* 1.4240	* 1.5193	* 1.4088	* .6535
	* 1.4249	* 1.3548	* 1.4260	* 1.3429	* 1.3414	* 1.2552	* 1.3533	* 2.9128
12	* 1.4131	* 1.3752	* 1.4695	* 1.4251	* 1.5519	* 1.5237	* .9179	*
	* 1.3427	* 1.3846	* 1.2953	* 1.3414	* 1.2302	* 1.2543	* 2.0759	*
13	* 1.3622	* 1.4348	* 1.4814	* 1.5204	* 1.5237	* 1.4316	* .6957	*
	* 1.3959	* 1.3248	* 1.2856	* 1.2545	* 1.2532	* 1.3356	* 2.7428	*
14	* 1.2441	* 1.4359	* 1.4402	* 1.4088	* .9179	* .6957	*	*
	* 1.5280	* 1.3253	* 1.3226	* 1.3525	* 2.0771	* 2.7450	*	*
15	* .6860	* .8410	* .7315	* .6546	* F-SUB-Q			
	* 2.7655	* 2.2588	* 2.6012	* 2.9068	* M-SUB-Q			

AT 100% POWER, 50 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8659	* 1.2062	* 1.2072	* 1.1801	* 1.2668	* 1.1986	* 1.1010	* .6069
	* 2.1452	* 1.5393	* 1.5393	* 1.5818	* 1.4712	* 1.5590	* 1.6975	* 3.0861
9	* 1.2062	* 1.1964	* 1.1476	* 1.2484	* 1.2051	* 1.2733	* 1.2452	* .7293
	* 1.5393	* 1.5521	* 1.6255	* 1.4930	* 1.5511	* 1.4675	* 1.5035	* 2.5633
10	* 1.2072	* 1.1509	* 1.2354	* 1.1769	* 1.3026	* 1.3048	* 1.2365	* .6350
	* 1.5393	* 1.6203	* 1.5073	* 1.5903	* 1.4355	* 1.4329	* 1.5148	* 2.9505
11	* 1.1801	* 1.2506	* 1.1758	* 1.2636	* 1.2484	* 1.3438	* 1.2127	* .5668
	* 1.5818	* 1.4911	* 1.5914	* 1.4798	* 1.5025	* 1.3949	* 1.5443	* 3.3028
12	* 1.2668	* 1.2051	* 1.3015	* 1.2484	* 1.3785	* 1.3330	* .8106	*
	* 1.4712	* 1.5522	* 1.4364	* 1.5032	* 1.3584	* 1.4080	* 2.3142	*
13	* 1.1986	* 1.2712	* 1.3059	* 1.3438	* 1.3330	* 1.2354	* .6112	*
	* 1.5590	* 1.4700	* 1.4335	* 1.3941	* 1.4072	* 1.5194	* 3.0725	*
14	* 1.1010	* 1.2452	* 1.2365	* 1.2137	* .8106	* .6112	*	*
	* 1.6975	* 1.5042	* 1.5148	* 1.5450	* 2.3104	* 3.0658	*	*
15	* .6069	* .7315	* .6361	* .5679	* F-SUB-Q			
	* 3.0861	* 2.5577	* 2.9443	* 3.3060	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 24 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 50 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7001 *	* .8941 *	* .9168 *	* .9537 *	* 1.0198 *	* .9439 *	* .8659 *	* .4844 *
	* 2.6212 *	* 2.0539 *	* 2.0089 *	* 1.9334 *	* 1.8066 *	* 1.9549 *	* 2.1355 *	* 3.8261 *
9	* .8941 *	* .9081 *	* .9201 *	* .9569 *	* .9515 *	* .9786 *	* .9547 *	* .5603 *
	* 2.0539 *	* 2.0262 *	* 2.0009 *	* 1.9244 *	* 1.9393 *	* 1.8864 *	* 1.9399 *	* 3.3121 *
10	* .9168 *	* .9222 *	* .9515 *	* .9374 *	* .9710 *	* .9602 *	* .9331 *	* .4953 *
	* 2.0089 *	* 1.9975 *	* 1.9355 *	* 1.9685 *	* 1.9032 *	* 1.9244 *	* 1.9835 *	* 3.7488 *
11	* .9537 *	* .9580 *	* .9374 *	* .9612 *	* .9948 *	* 1.0512 *	* .9255 *	* .4454 *
	* 1.9334 *	* 1.9229 *	* 1.9696 *	* 1.9202 *	* 1.8610 *	* 1.7606 *	* 2.0032 *	* 4.1700 *
12	* 1.0198 *	* .9526 *	* .9699 *	* .9948 *	* 1.0967 *	* 1.0447 *	* .6470 *	
	* 1.8066 *	* 1.9350 *	* 1.9047 *	* 1.8610 *	* 1.6873 *	* 1.7757 *	* 2.8675 *	
13	* .9439 *	* .9775 *	* .9602 *	* 1.0523 *	* 1.0447 *	* .9439 *	* .4855 *	
	* 1.9549 *	* 1.8879 *	* 1.9255 *	* 1.7615 *	* 1.7734 *	* 1.9663 *	* 3.8239 *	
14	* .8659 *	* .9547 *	* .9331 *	* .9255 *	* .6470 *	* .4855 *		
	* 2.1355 *	* 1.9372 *	* 1.9835 *	* 2.0032 *	* 2.8640 *	* 3.8239 *		
15	* .4844 *	* .5614 *	* .4953 *	* .4454 *	F-SUB-Q			
	* 3.8261 *	* 3.3075 *	* 3.7488 *	* 4.1626 *	M-SUB-Q			

AT 100% POWER, 50 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .4627 *	* .3825 *	* .4183 *	* .4747 *	* .4421 *	* .4638 *	* .3869 *	* .2352 *
	* 3.9568 *	* 4.7771 *	* 4.3795 *	* 3.8572 *	* 4.1526 *	* 3.9614 *	* 4.7547 *	* 7.8524 *
9	* .3825 *	* .4183 *	* .4606 *	* .4335 *	* .4747 *	* .4313 *	* .4031 *	* .2514 *
	* 4.7771 *	* 4.3795 *	* 3.9769 *	* 4.2196 *	* 3.8572 *	* 4.2554 *	* 4.5818 *	* 7.3528 *
10	* .4183 *	* .4617 *	* .4259 *	* .4692 *	* .4281 *	* .4031 *	* .3956 *	* .2482 *
	* 4.3795 *	* 3.9702 *	* 4.3020 *	* 3.9129 *	* 4.2942 *	* 4.5608 *	* 4.6543 *	* 7.4459 *
11	* .4747 *	* .4346 *	* .4692 *	* .4432 *	* .4866 *	* .4421 *	* .3760 *	* .2167 *
	* 3.8572 *	* 4.2196 *	* 3.9129 *	* 4.1600 *	* 3.7787 *	* 4.1673 *	* 4.9103 *	* 8.4953 *
12	* .4421 *	* .4747 *	* .4281 *	* .4866 *	* .4606 *	* .4443 *	* .3208 *	
	* 4.1526 *	* 3.8615 *	* 4.2942 *	* 3.7787 *	* 3.9972 *	* 4.1404 *	* 5.7609 *	
13	* .4638 *	* .4313 *	* .4031 *	* .4421 *	* .4443 *	* .3901 *	* .2395 *	
	* 3.9614 *	* 4.2554 *	* 4.5608 *	* 4.1673 *	* 4.1404 *	* 4.7291 *	* 7.7317 *	
14	* .3869 *	* .4031 *	* .3956 *	* .3760 *	* .3208 *	* .2395 *		
	* 4.7547 *	* 4.5669 *	* 4.6543 *	* 4.9103 *	* 5.7609 *	* 7.7317 *		
15	* .2352 *	* .2514 *	* .2482 *	* .2167 *	F-SUB-Q			
	* 7.8524 *	* 7.3528 *	* 7.4620 *	* 8.4953 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 25 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 200 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .4844 *	* .4335 *	* .4627 *	* .4931 *	* .4703 *	* .4725 *	* .4086 *	* .2709 *
	* 3.3929 *	* 4.1225 *	* 3.7470 *	* 3.3699 *	* 3.6226 *	* 3.4806 *	* 4.1226 *	* 6.1260 *
9	* .4335 *	* .4627 *	* .4898 *	* .4660 *	* .4887 *	* .4541 *	* .4140 *	* .2872 *
	* 4.1225 *	* 3.7992 *	* 3.4523 *	* 3.6775 *	* 3.4024 *	* 3.7471 *	* 3.9696 *	* 5.8155 *
10	* .4627 *	* .4898 *	* .4649 *	* .4898 *	* .4606 *	* .4291 *	* .4075 *	* .2839 *
	* 3.7470 *	* 3.4522 *	* 3.7599 *	* 3.4749 *	* 3.7927 *	* 4.0611 *	* 4.1240 *	* 5.9585 *
11	* .4931 *	* .4660 *	* .4898 *	* .4584 *	* .4627 *	* .4226 *	* .3739 *	* .2471 *
	* 3.3699 *	* 3.6775 *	* 3.4692 *	* 3.8874 *	* 3.6121 *	* 4.0368 *	* 4.5748 *	* 7.0576 *
12	* .4703 *	* .4887 *	* .4606 *	* .4627 *	* .4118 *	* .3836 *	* .3229 *	
	* 3.6226 *	* 3.4024 *	* 3.7927 *	* 3.6121 *	* 3.8180 *	* 4.0001 *	* 5.2582 *	
13	* .4725 *	* .4541 *	* .4291 *	* .4226 *	* .3836 *	* .3392 *	* .2471 *	
	* 3.4806 *	* 3.7471 *	* 4.0611 *	* 4.0368 *	* 4.0001 *	* 4.4595 *	* 6.7060 *	
14	* .4086 *	* .4140 *	* .4075 *	* .3739 *	* .3229 *	* .2471 *		
	* 4.1226 *	* 3.9695 *	* 4.1240 *	* 4.5748 *	* 5.2582 *	* 6.7060 *		
15	* .2709 *	* .2883 *	* .2839 *	* .2471 *	F-SUB-Q			
	* 6.1260 *	* 5.8155 *	* 5.9585 *	* 7.0576 *	M-SUB-Q			

AT 100% POWER, 200 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6795 *	* .9634 *	* .9927 *	* .9179 *	* .9948 *	* .9027 *	* .8518 *	* .5191 *
	* 2.4899 *	* 1.9041 *	* 1.8025 *	* 1.8633 *	* 1.7649 *	* 1.8781 *	* 2.0292 *	* 3.2966 *
9	* .9634 *	* .9797 *	* .9136 *	* 1.0078 *	* .9157 *	* .9764 *	* .8984 *	* .6080 *
	* 1.9041 *	* 1.8638 *	* 1.8999 *	* 1.7564 *	* 1.8666 *	* 1.7967 *	* 1.8865 *	* 2.8221 *
10	* .9927 *	* .9146 *	* 1.0013 *	* .9125 *	* .9938 *	* .9645 *	* .8810 *	* .5332 *
	* 1.8025 *	* 1.8982 *	* 1.7937 *	* 1.9084 *	* 1.8220 *	* 1.8717 *	* 1.9576 *	* 3.2721 *
11	* .9179 *	* 1.0078 *	* .9136 *	* .9840 *	* .8876 *	* .9341 *	* .8323 *	* .4736 *
	* 1.8633 *	* 1.7550 *	* 1.9050 *	* 1.8522 *	* 1.9543 *	* 1.9063 *	* 2.1047 *	* 3.7855 *
12	* .9948 *	* .9157 *	* .9938 *	* .8876 *	* .8984 *	* .8605 *	* .6090 *	
	* 1.7649 *	* 1.8666 *	* 1.8220 *	* 1.9543 *	* 1.8051 *	* 1.9066 *	* 2.8765 *	
13	* .9027 *	* .9753 *	* .9645 *	* .9352 *	* .8605 *	* .7857 *	* .4747 *	
	* 1.8781 *	* 1.7967 *	* 1.8717 *	* 1.9063 *	* 1.9066 *	* 2.0667 *	* 3.6023 *	
14	* .8518 *	* .8984 *	* .8810 *	* .8323 *	* .6090 *	* .4747 *		
	* 2.0292 *	* 1.8865 *	* 1.9576 *	* 2.1047 *	* 2.8765 *	* 3.6023 *		
15	* .5191 *	* .6090 *	* .5332 *	* .4736 *	F-SUB-Q			
	* 3.2966 *	* 2.8220 *	* 3.2721 *	* 3.7855 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 26 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 200 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8485	* 1.1715	* 1.2192	* 1.1661	* 1.2224	* 1.1466	* 1.0490	* .6307
	* 2.1821	* 1.6066	* 1.4995	* 1.4922	* 1.4666	* 1.5102	* 1.6834	* 2.7698
9	* 1.1715	* 1.1986	* 1.1596	* 1.2419	* 1.1617	* 1.2007	* 1.1433	* .7553
	* 1.6066	* 1.5576	* 1.5252	* 1.4550	* 1.5017	* 1.4904	* 1.5134	* 2.3291
10	* 1.2192	* 1.1606	* 1.2354	* 1.1606	* 1.2246	* 1.1845	* 1.1270	* .6578
	* 1.4995	* 1.5241	* 1.4863	* 1.5351	* 1.5128	* 1.5576	* 1.5643	* 2.7153
11	* 1.1661	* 1.2430	* 1.1606	* 1.2192	* 1.1336	* 1.1628	* 1.0685	* .5852
	* 1.4922	* 1.4541	* 1.5329	* 1.5289	* 1.5649	* 1.5735	* 1.6715	* 3.1307
12	* 1.2224	* 1.1617	* 1.2246	* 1.1336	* 1.1975	* 1.1325	* .7499	*
	* 1.4666	* 1.5006	* 1.5128	* 1.5649	* 1.4895	* 1.5237	* 2.4014	*
13	* 1.1466	* 1.2007	* 1.1845	* 1.1628	* 1.1325	* 1.0414	* .5884	*
	* 1.5102	* 1.4904	* 1.5576	* 1.5735	* 1.5237	* 1.6358	* 3.0018	*
14	* 1.0490	* 1.1433	* 1.1270	* 1.0685	* .7499	* .5884	*	*
	* 1.6834	* 1.5134	* 1.5643	* 1.6715	* 2.4014	* 2.9991	*	*
15	* .6307	* .7564	* .6578	* .5852	* F-SUB-Q			
	* 2.7698	* 2.3266	* 2.7153	* 3.1307	* M-SUB-Q			

AT 100% POWER, 200 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9266	* 1.3015	* 1.3839	* 1.3817	* 1.3980	* 1.3470	* 1.1932	* .7066
	* 2.0668	* 1.4830	* 1.3484	* 1.2843	* 1.3103	* 1.3062	* 1.5105	* 2.5256
9	* 1.3015	* 1.3514	* 1.3698	* 1.4196	* 1.3720	* 1.3665	* 1.3340	* .8583
	* 1.4830	* 1.4091	* 1.3158	* 1.3003	* 1.2967	* 1.3363	* 1.3207	* 2.0971
10	* 1.3839	* 1.3709	* 1.4121	* 1.3752	* 1.3947	* 1.3330	* 1.3297	* .7478
	* 1.3484	* 1.3150	* 1.3291	* 1.3206	* 1.3566	* 1.4127	* 1.3514	* 2.4423
11	* 1.3817	* 1.4196	* 1.3763	* 1.3969	* 1.3427	* 1.3275	* 1.2506	* .6665
	* 1.2843	* 1.2996	* 1.3190	* 1.3655	* 1.3512	* 1.4027	* 1.4580	* 2.8058
12	* 1.3980	* 1.3720	* 1.3947	* 1.3427	* 1.3936	* 1.3460	* .8550	*
	* 1.3103	* 1.2959	* 1.3567	* 1.3512	* 1.3238	* 1.3241	* 2.1645	*
13	* 1.3470	* 1.3655	* 1.3330	* 1.3275	* 1.3460	* 1.2463	* .6730	*
	* 1.3062	* 1.3371	* 1.4127	* 1.4025	* 1.3233	* 1.4081	* 2.6996	*
14	* 1.1932	* 1.3340	* 1.3297	* 1.2506	* .8550	* .6741	*	*
	* 1.5105	* 1.3207	* 1.3514	* 1.4580	* 2.1645	* 2.6974	*	*
15	* .7066	* .8594	* .7478	* .6676	* F-SUB-Q			
	* 2.5256	* 2.0931	* 2.4423	* 2.8058	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 27 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 200 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9493	* 1.3525	* 1.4652	* 1.5009	* 1.4923	* 1.4608	* 1.2658	* .7402
	* 2.0773	* 1.4632	* 1.3029	* 1.2074	* 1.2561	* 1.2287	* 1.4572	* 2.4667
9	* 1.3525	* 1.4218	* 1.4825	* 1.5118	* 1.4879	* 1.4500	* 1.4327	* .9071
	* 1.4632	* 1.3690	* 1.2414	* 1.2491	* 1.2204	* 1.2886	* 1.2559	* 2.0306
10	* 1.4652	* 1.4847	* 1.5042	* 1.4933	* 1.4814	* 1.4023	* 1.4348	* .7900
	* 1.3029	* 1.2400	* 1.2769	* 1.2414	* 1.3074	* 1.3732	* 1.2759	* 2.3626
11	* 1.5009	* 1.5128	* 1.4944	* 1.4901	* 1.4630	* 1.4131	* 1.3460	* .7066
	* 1.2074	* 1.2484	* 1.2407	* 1.3123	* 1.2704	* 1.3492	* 1.3878	* 2.7083
12	* 1.4923	* 1.4890	* 1.4814	* 1.4630	* 1.4955	* 1.4641	* .9071	*
	* 1.2561	* 1.2197	* 1.3074	* 1.2704	* 1.2697	* 1.2499	* 2.0967	*
13	* 1.4608	* 1.4489	* 1.4034	* 1.4131	* 1.4641	* 1.3579	* .7163	*
	* 1.2287	* 1.2887	* 1.3732	* 1.3486	* 1.2499	* 1.3281	* 2.6139	*
14	* 1.2658	* 1.4327	* 1.4348	* 1.3460	* .9071	* .7163	*	*
	* 1.4572	* 1.2559	* 1.2759	* 1.3869	* 2.0967	* 2.6139	*	*
15	* .7402	* .9081	* .7900	* .7066	* F-SUB-Q			
	* 2.4667	* 2.0287	* 2.3626	* 2.7083	* M-SUB-Q			

AT 100% POWER, 200 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9580	* 1.3763	* 1.5096	* 1.5703	* 1.5486	* 1.5258	* 1.3059	* .7586
	* 2.1059	* 1.4685	* 1.2964	* 1.1821	* 1.2428	* 1.2050	* 1.4489	* 2.4721
9	* 1.3763	* 1.4587	* 1.5464	* 1.5649	* 1.5551	* 1.4966	* 1.4858	* .9309
	* 1.4685	* 1.3672	* 1.2179	* 1.2380	* 1.1957	* 1.2802	* 1.2388	* 2.0293
10	* 1.5096	* 1.5475	* 1.5573	* 1.5649	* 1.5302	* 1.4402	* 1.4933	* .8128
	* 1.2964	* 1.2172	* 1.2644	* 1.2152	* 1.2964	* 1.3705	* 1.2523	* 2.3534
11	* 1.5703	* 1.5659	* 1.5659	* 1.5443	* 1.5313	* 1.4641	* 1.3980	* .7272
	* 1.1821	* 1.2373	* 1.2145	* 1.2967	* 1.2436	* 1.3381	* 1.3627	* 2.6936
12	* 1.5486	* 1.5562	* 1.5302	* 1.5313	* 1.5529	* 1.5302	* .9352	*
	* 1.2428	* 1.1957	* 1.2972	* 1.2436	* 1.2579	* 1.2288	* 2.0912	*
13	* 1.5258	* 1.4955	* 1.4402	* 1.4641	* 1.5302	* 1.4207	* .7391	*
	* 1.2050	* 1.2809	* 1.3705	* 1.3381	* 1.2288	* 1.3070	* 2.6128	*
14	* 1.3059	* 1.4858	* 1.4933	* 1.3980	* .9352	* .7391	*	*
	* 1.4489	* 1.2388	* 1.2516	* 1.3627	* 2.0899	* 2.6128	*	*
15	* .7586	* .9320	* .8128	* .7272	* F-SUB-Q			
	* 2.4721	* 2.0257	* 2.3534	* 2.6904	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 28 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 200 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9677	* 1.4012	* 1.5529	* 1.6342	* 1.6006	* 1.5865	* 1.3449	* .7770
	* 2.1211	* 1.4624	* 1.2960	* 1.1692	* 1.2380	* 1.1929	* 1.4491	* 2.4857
9	* 1.4012	* 1.4944	* 1.6039	* 1.6158	* 1.6158	* 1.5410	* 1.5345	* .9558
	* 1.4624	* 1.3696	* 1.2054	* 1.2347	* 1.1831	* 1.2799	* 1.2320	* 2.0336
10	* 1.5529	* 1.6060	* 1.6082	* 1.6288	* 1.5779	* 1.4771	* 1.5475	* .8355
	* 1.2960	* 1.2047	* 1.2593	* 1.2001	* 1.2905	* 1.3708	* 1.2383	* 2.3518
11	* 1.6342	* 1.6169	* 1.6310	* 1.5952	* 1.5930	* 1.5118	* 1.4457	* .7478
	* 1.1692	* 1.2333	* 1.1987	* 1.2789	* 1.2232	* 1.3305	* 1.3404	* 2.6756
12	* 1.6006	* 1.6158	* 1.5768	* 1.5930	* 1.6060	* 1.5876	* .9634	*
	* 1.2380	* 1.1825	* 1.2907	* 1.2237	* 1.2482	* 1.2129	* 2.0852	*
13	* 1.5865	* 1.5410	* 1.4771	* 1.5128	* 1.5876	* 1.4760	* .7618	*
	* 1.1929	* 1.2807	* 1.3708	* 1.3297	* 1.2127	* 1.2907	* 2.6048	*
14	* 1.3449	* 1.5345	* 1.5475	* 1.4457	* .9634	* .7618	*	*
	* 1.4491	* 1.2313	* 1.2375	* 1.3401	* 2.0852	* 2.6048	*	*
15	* .7770	* .9569	* .8355	* .7478	* F-SUB-Q			
	* 2.4857	* 2.0299	* 2.3518	* 2.6733	* M-SUB-Q			

AT 100% POWER, 200 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9602	* 1.4023	* 1.5670	* 1.6700	* 1.6223	* 1.6201	* 1.3568	* .7803
	* 2.1877	* 1.5013	* 1.3258	* 1.1878	* 1.2634	* 1.2113	* 1.4843	* 2.5610
9	* 1.4023	* 1.5042	* 1.6353	* 1.6364	* 1.6505	* 1.5573	* 1.5594	* .9612
	* 1.5013	* 1.3929	* 1.2241	* 1.2600	* 1.2020	* 1.3091	* 1.2548	* 2.0881
10	* 1.5670	* 1.6375	* 1.6288	* 1.6646	* 1.5952	* 1.4868	* 1.5757	* .8420
	* 1.3258	* 1.2227	* 1.2816	* 1.2093	* 1.3088	* 1.3952	* 1.2536	* 2.4047
11	* 1.6700	* 1.6375	* 1.6667	* 1.6147	* 1.6266	* 1.5313	* 1.4706	* .7532
	* 1.1878	* 1.2593	* 1.2085	* 1.2958	* 1.2279	* 1.3447	* 1.3535	* 2.7203
12	* 1.6223	* 1.6516	* 1.5941	* 1.6266	* 1.6299	* 1.6190	* .9721	*
	* 1.2634	* 1.2014	* 1.3094	* 1.2279	* 1.2621	* 1.2247	* 2.1141	*
13	* 1.6201	* 1.5562	* 1.4868	* 1.5324	* 1.6190	* 1.5063	* .7694	*
	* 1.2113	* 1.3098	* 1.3950	* 1.3442	* 1.2247	* 1.3070	* 2.6564	*
14	* 1.3568	* 1.5594	* 1.5768	* 1.4706	* .9721	* .7694	*	*
	* 1.4843	* 1.2548	* 1.2535	* 1.3535	* 2.1141	* 2.6542	*	*
15	* .7803	* .9623	* .8431	* .7532	* F-SUB-Q			
	* 2.5610	* 2.0843	* 2.4047	* 2.7196	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 29 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 200 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9612	* 1.4099	* 1.5844	* 1.7025	* 1.6451	* 1.6505	* 1.3730	* .7857
	* 2.2719	* 1.5390	* 1.3590	* 1.2209	* 1.2947	* 1.2461	* 1.5258	* 2.6401
9	* 1.4099	* 1.5172	* 1.6635	* 1.6581	* 1.6819	* 1.5757	* 1.5822	* .9688
	* 1.5390	* 1.4250	* 1.2587	* 1.2911	* 1.2351	* 1.3431	* 1.2937	* 2.1471
10	* 1.5844	* 1.6656	* 1.6505	* 1.6971	* 1.6136	* 1.5009	* 1.6017	* .8507
	* 1.3590	* 1.2573	* 1.3072	* 1.2358	* 1.3336	* 1.4257	* 1.2832	* 2.4646
11	* 1.7025	* 1.6591	* 1.6982	* 1.6353	* 1.6581	* 1.5529	* 1.4923	* .7597
	* 1.2209	* 1.2903	* 1.2345	* 1.3235	* 1.2560	* 1.3699	* 1.3905	* 2.7726
12	* 1.6451	* 1.6819	* 1.6136	* 1.6581	* 1.6537	* 1.6472	* .9829	*
	* 1.2947	* 1.2344	* 1.3337	* 1.2560	* 1.2872	* 1.2543	* 2.1585	*
13	* 1.6505	* 1.5757	* 1.5009	* 1.5540	* 1.6472	* 1.5334	* .7781	*
	* 1.2461	* 1.3439	* 1.4250	* 1.3697	* 1.2540	* 1.3350	* 2.7080	*
14	* 1.3730	* 1.5822	* 1.6017	* 1.4923	* .9829	* .7781	*	*
	* 1.5258	* 1.2937	* 1.2826	* 1.3905	* 2.1585	* 2.7057	*	*
15	* .7857	* .9699	* .8507	* .7597	* F-SUB-Q			
	* 2.6401	* 2.1431	* 2.4646	* 2.7726	* M-SUB-Q			

AT 100% POWER, 200 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9472	* 1.3926	* 1.5735	* 1.6927	* 1.6396	* 1.6407	* 1.3633	* .7781
	* 2.3833	* 1.6164	* 1.4254	* 1.2929	* 1.3576	* 1.3199	* 1.6052	* 2.7788
9	* 1.3926	* 1.5042	* 1.6526	* 1.6505	* 1.6721	* 1.5670	* 1.5703	* .9602
	* 1.6164	* 1.4944	* 1.3294	* 1.3552	* 1.3070	* 1.4105	* 1.3702	* 2.2560
10	* 1.5735	* 1.6548	* 1.6429	* 1.6873	* 1.6050	* 1.4890	* 1.5898	* .8431
	* 1.4254	* 1.3271	* 1.3633	* 1.3005	* 1.3946	* 1.4946	* 1.3537	* 2.5833
11	* 1.6927	* 1.6516	* 1.6895	* 1.6277	* 1.6494	* 1.5454	* 1.4803	* .7532
	* 1.2929	* 1.3536	* 1.2990	* 1.3763	* 1.3285	* 1.4361	* 1.4635	* 2.8982
12	* 1.6396	* 1.6732	* 1.6039	* 1.6494	* 1.6472	* 1.6386	* .9764	*
	* 1.3576	* 1.3062	* 1.3954	* 1.3285	* 1.3506	* 1.3276	* 2.2655	*
13	* 1.6407	* 1.5659	* 1.4890	* 1.5464	* 1.6386	* 1.5248	* .7716	*
	* 1.3199	* 1.4114	* 1.4944	* 1.4358	* 1.3271	* 1.4121	* 2.8414	*
14	* 1.3633	* 1.5703	* 1.5909	* 1.4803	* .9764	* .7716	*	*
	* 1.6052	* 1.3701	* 1.3529	* 1.4635	* 2.2649	* 2.8404	*	*
15	* .7781	* .9612	* .8442	* .7532	* F-SUB-Q			
	* 2.7788	* 2.2538	* 2.5833	* 2.8982	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 30 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 200 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9472	* 1.3980	* 1.5898	* 1.7307	* 1.6613	* 1.6765	* 1.3763	* .7824
	* 2.4256	* 1.6392	* 1.4380	* 1.3022	* 1.3728	* 1.3448	* 1.6603	* 2.8980
9	* 1.3980	* 1.5161	* 1.6862	* 1.6711	* 1.7090	* 1.5855	* 1.5985	* .9667
	* 1.6392	* 1.5107	* 1.3385	* 1.3656	* 1.3193	* 1.4407	* 1.4132	* 2.3440
10	* 1.5898	* 1.6884	* 1.6635	* 1.7253	* 1.6223	* 1.4998	* 1.6223	* .8518
	* 1.4380	* 1.3362	* 1.3736	* 1.3089	* 1.4102	* 1.5275	* 1.3936	* 2.6719
11	* 1.7307	* 1.6721	* 1.7263	* 1.6472	* 1.6862	* 1.5670	* 1.5063	* .7586
	* 1.3022	* 1.3648	* 1.3074	* 1.3900	* 1.3455	* 1.4670	* 1.5046	* 3.0018
12	* 1.6613	* 1.7101	* 1.6212	* 1.6862	* 1.6711	* 1.6721	* .9862	*
	* 1.3728	* 1.3193	* 1.4110	* 1.3455	* 1.3777	* 1.3598	* 2.3357	*
13	* 1.6765	* 1.5844	* 1.4998	* 1.5681	* 1.6721	* 1.5584	* .7792	*
	* 1.3448	* 1.4416	* 1.5275	* 1.4660	* 1.3598	* 1.4626	* 2.9391	*
14	* 1.3763	* 1.5985	* 1.6223	* 1.5074	* .9862	* .7803	*	*
	* 1.6603	* 1.4132	* 1.3927	* 1.5046	* 2.3357	* 2.9391	*	*
15	* .7824	* .9677	* .8518	* .7586	* F-SUB-Q			
	* 2.8980	* 2.3416	* 2.6719	* 3.0018	* M-SUB-Q			

AT 100% POWER, 200 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9396	* 1.3904	* 1.5887	* 1.7415	* 1.6667	* 1.6852	* 1.3752	* .7792
	* 2.4770	* 1.6707	* 1.4606	* 1.3253	* 1.3905	* 1.3688	* 1.6827	* 2.9655
9	* 1.3904	* 1.5118	* 1.6938	* 1.6732	* 1.7187	* 1.5855	* 1.6028	* .9634
	* 1.6707	* 1.5351	* 1.3640	* 1.3855	* 1.3444	* 1.4624	* 1.4414	* 2.4034
10	* 1.5887	* 1.6971	* 1.6667	* 1.7350	* 1.6223	* 1.4955	* 1.6288	* .8496
	* 1.4606	* 1.3624	* 1.3954	* 1.3352	* 1.4347	* 1.5565	* 1.4230	* 2.7339
11	* 1.7415	* 1.6754	* 1.7372	* 1.6494	* 1.6960	* 1.5703	* 1.5096	* .7564
	* 1.3253	* 1.3847	* 1.3337	* 1.4148	* 1.3777	* 1.4960	* 1.5413	* 3.0783
12	* 1.6667	* 1.7198	* 1.6212	* 1.6960	* 1.6776	* 1.6808	* .9851	*
	* 1.3905	* 1.3436	* 1.4356	* 1.3777	* 1.4046	* 1.3958	* 2.3838	*
13	* 1.6852	* 1.5855	* 1.4955	* 1.5714	* 1.6808	* 1.5659	* .7792	*
	* 1.3688	* 1.4624	* 1.5565	* 1.4960	* 1.3958	* 1.5036	* 3.0267	*
14	* 1.3752	* 1.6028	* 1.6288	* 1.5107	* .9862	* .7792	*	*
	* 1.6827	* 1.4414	* 1.4221	* 1.5413	* 2.3838	* 3.0267	*	*
15	* .7792	* .9656	* .8507	* .7564	* F-SUB-Q			
	* 2.9655	* 2.3985	* 2.7307	* 3.0783	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 31 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 200 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9276	* 1.3752	* 1.5746	* 1.7296	* 1.6570	* 1.6721	* 1.3655	* .7716
	* 2.5384	* 1.7088	* 1.4912	* 1.3570	* 1.4158	* 1.4023	* 1.7151	* 3.0284
9	* 1.3752	* 1.4977	* 1.6808	* 1.6624	* 1.7057	* 1.5735	* 1.5898	* .9547
	* 1.7088	* 1.5697	* 1.3990	* 1.4124	* 1.3769	* 1.4902	* 1.4762	* 2.4511
10	* 1.5746	* 1.6830	* 1.6559	* 1.7220	* 1.6093	* 1.4825	* 1.6147	* .8420
	* 1.4912	* 1.3965	* 1.4235	* 1.3689	* 1.4652	* 1.5910	* 1.4570	* 2.7880
11	* 1.7296	* 1.6635	* 1.7242	* 1.6364	* 1.6841	* 1.5605	* 1.4966	* .7488
	* 1.3570	* 1.4116	* 1.3673	* 1.4445	* 1.4141	* 1.5280	* 1.5803	* 3.1416
12	* 1.6570	* 1.7068	* 1.6093	* 1.6841	* 1.6667	* 1.6689	* .9775	*
	* 1.4158	* 1.3761	* 1.4661	* 1.4141	* 1.4348	* 1.4313	* 2.4359	*
13	* 1.6721	* 1.5724	* 1.4825	* 1.5605	* 1.6689	* 1.5551	* .7727	*
	* 1.4023	* 1.4912	* 1.5899	* 1.5280	* 1.4313	* 1.5400	* 3.0921	*
14	* 1.3655	* 1.5898	* 1.6158	* 1.4977	* .9775	* .7727	*	*
	* 1.7151	* 1.4753	* 1.4561	* 1.5803	* 2.4359	* 3.0921	*	*
15	* .7716	* .9558	* .8420	* .7499	* F-SUB-Q			
	* 3.0284	* 2.4485	* 2.7847	* 3.1416	* M-SUB-Q			

AT 100% POWER, 200 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9320	* 1.3861	* 1.5930	* 1.7599	* 1.6797	* 1.7025	* 1.3817	* .7792
	* 2.4881	* 1.6766	* 1.4637	* 1.3272	* 1.3907	* 1.3712	* 1.6805	* 2.9544
9	* 1.3861	* 1.5128	* 1.7079	* 1.6841	* 1.7361	* 1.5941	* 1.6169	* .9645
	* 1.6766	* 1.5397	* 1.3689	* 1.3882	* 1.3477	* 1.4643	* 1.4436	* 2.3950
10	* 1.5930	* 1.7112	* 1.6776	* 1.7534	* 1.6288	* 1.4988	* 1.6440	* .8529
	* 1.4637	* 1.3665	* 1.3990	* 1.3408	* 1.4427	* 1.5677	* 1.4261	* 2.7208
11	* 1.7599	* 1.6852	* 1.7545	* 1.6581	* 1.7155	* 1.5833	* 1.5215	* .7575
	* 1.3272	* 1.3866	* 1.3392	* 1.4244	* 1.3932	* 1.5103	* 1.5501	* 3.0725
12	* 1.6797	* 1.7372	* 1.6277	* 1.7155	* 1.6917	* 1.6992	* .9905	*
	* 1.3907	* 1.3469	* 1.4436	* 1.3932	* 1.4244	* 1.4141	* 2.3986	*
13	* 1.7025	* 1.5930	* 1.4988	* 1.5833	* 1.6992	* 1.5844	* .7824	*
	* 1.3712	* 1.4652	* 1.5677	* 1.5103	* 1.4132	* 1.5210	* 3.0480	*
14	* 1.3817	* 1.6169	* 1.6451	* 1.5226	* .9905	* .7824	*	*
	* 1.6805	* 1.4436	* 1.4252	* 1.5491	* 2.3986	* 3.0456	*	*
15	* .7792	* .9667	* .8529	* .7586	* F-SUB-Q			
	* 2.9544	* 2.3902	* 2.7208	* 3.0725	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 32 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 200 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9255 *	* 1.3806 *	* 1.5920 *	* 1.7697 *	* 1.6830 *	* 1.7112 *	* 1.3828 *	* .7770 *
	* 2.4214 *	* 1.6257 *	* 1.4144 *	* 1.2761 *	* 1.3415 *	* 1.3178 *	* 1.6224 *	* 2.8645 *
9	* 1.3806 *	* 1.5107 *	* 1.7155 *	* 1.6862 *	* 1.7448 *	* 1.5952 *	* 1.6255 *	* .9634 *
	* 1.6257 *	* 1.4896 *	* 1.3168 *	* 1.3395 *	* 1.2960 *	* 1.4143 *	* 1.3871 *	* 2.3157 *
10	* 1.5920 *	* 1.7187 *	* 1.6787 *	* 1.7621 *	* 1.6288 *	* 1.4977 *	* 1.6548 *	* .8529 *
	* 1.4144 *	* 1.3146 *	* 1.3503 *	* 1.2892 *	* 1.3942 *	* 1.5152 *	* 1.3685 *	* 2.6271 *
11	* 1.7697 *	* 1.6873 *	* 1.7643 *	* 1.6591 *	* 1.7263 *	* 1.5876 *	* 1.5302 *	* .7564 *
	* 1.2761 *	* 1.3383 *	* 1.2877 *	* 1.3749 *	* 1.3385 *	* 1.4551 *	* 1.4884 *	* 2.9703 *
12	* 1.6830 *	* 1.7458 *	* 1.6277 *	* 1.7263 *	* 1.6982 *	* 1.7101 *	* .9916 *	
	* 1.3415 *	* 1.2953 *	* 1.3945 *	* 1.3385 *	* 1.3746 *	* 1.3580 *	* 2.3108 *	
13	* 1.7112 *	* 1.5941 *	* 1.4977 *	* 1.5887 *	* 1.7101 *	* 1.5963 *	* .7824 *	
	* 1.3178 *	* 1.4146 *	* 1.5146 *	* 1.4542 *	* 1.3580 *	* 1.4586 *	* 2.9355 *	
14	* 1.3828 *	* 1.6255 *	* 1.6548 *	* 1.5302 *	* .9916 *	* .7824 *		
	* 1.6224 *	* 1.3871 *	* 1.3682 *	* 1.4880 *	* 2.3099 *	* 2.9341 *		
15	* .7770 *	* .9656 *	* .8529 *	* .7564 *	F-SUB-Q			
	* 2.8645 *	* 2.3111 *	* 2.6271 *	* 2.9679 *	M-SUB-Q			

AT 100% POWER, 200 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9179 *	* 1.3720 *	* 1.5844 *	* 1.7643 *	* 1.6787 *	* 1.7068 *	* 1.3774 *	* .7716 *
	* 2.3686 *	* 1.5876 *	* 1.3782 *	* 1.2409 *	* 1.3044 *	* 1.2812 *	* 1.5796 *	* 2.7978 *
9	* 1.3720 *	* 1.5020 *	* 1.7101 *	* 1.6797 *	* 1.7404 *	* 1.5898 *	* 1.6223 *	* .9580 *
	* 1.5876 *	* 1.4530 *	* 1.2814 *	* 1.3040 *	* 1.2601 *	* 1.3757 *	* 1.3473 *	* 2.2586 *
10	* 1.5844 *	* 1.7122 *	* 1.6732 *	* 1.7567 *	* 1.6223 *	* 1.4923 *	* 1.6526 *	* .8485 *
	* 1.3782 *	* 1.2793 *	* 1.3142 *	* 1.2534 *	* 1.3567 *	* 1.4742 *	* 1.3276 *	* 2.5591 *
11	* 1.7643 *	* 1.6808 *	* 1.7588 *	* 1.6526 *	* 1.7231 *	* 1.5855 *	* 1.5280 *	* .7521 *
	* 1.2409 *	* 1.3028 *	* 1.2520 *	* 1.3372 *	* 1.2980 *	* 1.4100 *	* 1.4435 *	* 2.8950 *
12	* 1.6787 *	* 1.7415 *	* 1.6212 *	* 1.7231 *	* 1.6949 *	* 1.7090 *	* .9873 *	
	* 1.3044 *	* 1.2594 *	* 1.3570 *	* 1.2980 *	* 1.3320 *	* 1.3146 *	* 2.2453 *	
13	* 1.7068 *	* 1.5887 *	* 1.4923 *	* 1.5865 *	* 1.7090 *	* 1.5963 *	* .7792 *	
	* 1.2812 *	* 1.3765 *	* 1.4742 *	* 1.4100 *	* 1.3146 *	* 1.4098 *	* 2.8516 *	
14	* 1.3774 *	* 1.6223 *	* 1.6526 *	* 1.5280 *	* .9873 *	* .7792 *		
	* 1.5796 *	* 1.3466 *	* 1.3273 *	* 1.4431 *	* 2.2440 *	* 2.8503 *		
15	* .7716 *	* .9602 *	* .8485 *	* .7521 *	F-SUB-Q			
	* 2.7978 *	* 2.2543 *	* 2.5591 *	* 2.8950 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 33 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 200 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9071	* 1.3568	* 1.5681	* 1.7393	* 1.6635	* 1.6841	* 1.3644	* .7629
	* 2.3355	* 1.5616	* 1.3557	* 1.2248	* 1.2804	* 1.2639	* 1.5510	* 2.7533
9	* 1.3568	* 1.4858	* 1.6852	* 1.6635	* 1.7166	* 1.5746	* 1.6028	* .9482
	* 1.5616	* 1.4292	* 1.2646	* 1.2811	* 1.2429	* 1.3506	* 1.3258	* 2.2222
10	* 1.5681	* 1.6884	* 1.6570	* 1.7318	* 1.6071	* 1.4793	* 1.6342	* .8388
	* 1.3557	* 1.2626	* 1.2909	* 1.2366	* 1.3316	* 1.4456	* 1.3052	* 2.5174
11	* 1.7393	* 1.6656	* 1.7328	* 1.6375	* 1.7014	* 1.5735	* 1.5096	* .7434
	* 1.2248	* 1.2797	* 1.2350	* 1.3118	* 1.2753	* 1.3782	* 1.4192	* 2.8448
12	* 1.6635	* 1.7177	* 1.6060	* 1.7003	* 1.6819	* 1.6906	* .9786	*
	* 1.2804	* 1.2422	* 1.3324	* 1.2760	* 1.3016	* 1.2886	* 2.1986	*
13	* 1.6841	* 1.5735	* 1.4803	* 1.5746	* 1.6906	* 1.5800	* .7705	*
	* 1.2639	* 1.3514	* 1.4456	* 1.3779	* 1.2882	* 1.3794	* 2.7941	*
14	* 1.3644	* 1.6039	* 1.6342	* 1.5107	* .9786	* .7705	*	*
	* 1.5510	* 1.3250	* 1.3045	* 1.4183	* 2.1986	* 2.7941	*	*
15	* .7629	* .9504	* .8388	* .7445	* F-SUB-Q			
	* 2.7533	* 2.2159	* 2.5174	* 2.8427	* M-SUB-Q			

AT 100% POWER, 200 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9049	* 1.3557	* 1.5681	* 1.7502	* 1.6667	* 1.6960	* 1.3665	* .7608
	* 2.2669	* 1.5144	* 1.3131	* 1.1784	* 1.2381	* 1.2160	* 1.5051	* 2.6904
9	* 1.3557	* 1.4847	* 1.6949	* 1.6656	* 1.7274	* 1.5790	* 1.6180	* .9472
	* 1.5144	* 1.3853	* 1.2169	* 1.2394	* 1.1955	* 1.3070	* 1.2752	* 2.1635
10	* 1.5681	* 1.6982	* 1.6581	* 1.7426	* 1.6082	* 1.4825	* 1.6505	* .8399
	* 1.3131	* 1.2150	* 1.2474	* 1.1876	* 1.2864	* 1.3976	* 1.2522	* 2.4465
11	* 1.7502	* 1.6667	* 1.7437	* 1.6386	* 1.7155	* 1.5822	* 1.5248	* .7434
	* 1.1784	* 1.2381	* 1.1864	* 1.2655	* 1.2172	* 1.3199	* 1.3592	* 2.7663
12	* 1.6667	* 1.7285	* 1.6071	* 1.7155	* 1.6917	* 1.7079	* .9807	*
	* 1.2381	* 1.1949	* 1.2871	* 1.2172	* 1.2425	* 1.2262	* 2.1176	*
13	* 1.6960	* 1.5779	* 1.4836	* 1.5833	* 1.7079	* 1.5985	* .7716	*
	* 1.2160	* 1.3077	* 1.3976	* 1.3197	* 1.2262	* 1.3115	* 2.6935	*
14	* 1.3665	* 1.6180	* 1.6516	* 1.5248	* .9807	* .7727	*	*
	* 1.5051	* 1.2745	* 1.2520	* 1.3590	* 2.1172	* 2.6935	*	*
15	* .7608	* .9493	* .8399	* .7434	* F-SUB-Q			
	* 2.6904	* 2.1595	* 2.4440	* 2.7657	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 34 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 200 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8897	* 1.3351	* 1.5421	* 1.7187	* 1.6418	* 1.6656	* 1.3460	* .7467
	* 2.2257	* 1.4874	* 1.2925	* 1.1617	* 1.2163	* 1.1981	* 1.4792	* 2.6564
9	* 1.3351	* 1.4608	* 1.6635	* 1.6386	* 1.6960	* 1.5562	* 1.5963	* .9309
	* 1.4874	* 1.3623	* 1.1996	* 1.2182	* 1.1782	* 1.2832	* 1.2507	* 2.1333
10	* 1.5421	* 1.6667	* 1.6310	* 1.7090	* 1.5833	* 1.4641	* 1.6288	* .8258
	* 1.2925	* 1.1971	* 1.2259	* 1.1710	* 1.2640	* 1.3685	* 1.2278	* 2.4094
11	* 1.7187	* 1.6407	* 1.7101	* 1.6115	* 1.6873	* 1.5638	* 1.5042	* .7293
	* 1.1617	* 1.2169	* 1.1699	* 1.2433	* 1.1936	* 1.2882	* 1.3315	* 2.7272
12	* 1.6418	* 1.6971	* 1.5822	* 1.6862	* 1.6711	* 1.6862	* .9667	*
	* 1.2163	* 1.1776	* 1.2647	* 1.1937	* 1.2087	* 1.1967	* 2.0743	*
13	* 1.6656	* 1.5551	* 1.4641	* 1.5649	* 1.6862	* 1.5790	* .7597	*
	* 1.1981	* 1.2839	* 1.3679	* 1.2876	* 1.1967	* 1.2790	* 2.6421	*
14	* 1.3460	* 1.5963	* 1.6288	* 1.5053	* .9667	* .7597	*	*
	* 1.4792	* 1.2506	* 1.2272	* 1.3315	* 2.0739	* 2.6415	*	*
15	* .7467	* .9331	* .8258	* .7304	* F-SUB-Q			
	* 2.6564	* 2.1279	* 2.4070	* 2.7266	* M-SUB-Q			

AT 100% POWER, 200 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8583	* 1.2885	* 1.4793	* 1.6321	* 1.5757	* 1.5811	* 1.2929	* .7163
	* 2.2457	* 1.5003	* 1.3100	* 1.1901	* 1.2326	* 1.2282	* 1.4986	* 2.6960
9	* 1.2885	* 1.4034	* 1.5779	* 1.5724	* 1.6071	* 1.4966	* 1.5248	* .8908
	* 1.5003	* 1.3799	* 1.2298	* 1.2353	* 1.2092	* 1.2977	* 1.2737	* 2.1711
10	* 1.4793	* 1.5811	* 1.5638	* 1.6169	* 1.5215	* 1.4131	* 1.5508	* .7900
	* 1.3100	* 1.2278	* 1.2432	* 1.2035	* 1.2788	* 1.3777	* 1.2534	* 2.4521
11	* 1.6321	* 1.5735	* 1.6180	* 1.5464	* 1.6017	* 1.5063	* 1.4359	* .6979
	* 1.1901	* 1.2340	* 1.2016	* 1.2595	* 1.2207	* 1.2977	* 1.3565	* 2.7774
12	* 1.5757	* 1.6082	* 1.5204	* 1.6006	* 1.6071	* 1.6104	* .9298	*
	* 1.2326	* 1.2085	* 1.2794	* 1.2208	* 1.2178	* 1.2153	* 2.0968	*
13	* 1.5811	* 1.4955	* 1.4142	* 1.5074	* 1.6104	* 1.5085	* .7282	*
	* 1.2282	* 1.2984	* 1.3775	* 1.2976	* 1.2153	* 1.2984	* 2.6770	*
14	* 1.2929	* 1.5248	* 1.5519	* 1.4370	* .9298	* .7282	*	*
	* 1.4986	* 1.2736	* 1.2532	* 1.3558	* 2.0968	* 2.6770	*	*
15	* .7163	* .8930	* .7900	* .6979	* F-SUB-Q			
	* 2.6960	* 2.1651	* 2.4496	* 2.7768	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 35 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 200 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G ^t	F	E	D	C	B	A
8	* .8290	* 1.2408	* 1.4153	* 1.5497	* 1.5107	* 1.5031	* 1.2387	* .6838
	* 2.2774	* 1.5242	* 1.3397	* 1.2253	* 1.2572	* 1.2637	* 1.5311	* 2.7657
9	* 1.2408	* 1.3438	* 1.4977	* 1.5042	* 1.5269	* 1.4359	* 1.4554	* .8475
	* 1.5242	* 1.4093	* 1.2678	* 1.2620	* 1.2442	* 1.3225	* 1.3058	* 2.2355
10	* 1.4153	* 1.5009	* 1.4944	* 1.5291	* 1.4565	* 1.3600	* 1.4738	* .7521
	* 1.3397	* 1.2652	* 1.2714	* 1.2438	* 1.3056	* 1.3995	* 1.2906	* 2.5204
11	* 1.5497	* 1.5063	* 1.5324	* 1.4782	* 1.5226	* 1.4489	* 1.3698	* .6632
	* 1.2253	* 1.2606	* 1.2413	* 1.2876	* 1.2543	* 1.3178	* 1.3904	* 2.8640
12	* 1.5107	* 1.5280	* 1.4554	* 1.5226	* 1.5443	* 1.5378	* .8908	*
	* 1.2572	* 1.2430	* 1.3064	* 1.2543	* 1.2369	* 1.2420	* 2.1376	*
13	* 1.5031	* 1.4359	* 1.3611	* 1.4489	* 1.5389	* 1.4392	* .6957	*
	* 1.2637	* 1.3233	* 1.3986	* 1.3171	* 1.2414	* 1.3281	* 2.7386	*
14	* 1.2387	* 1.4554	* 1.4738	* 1.3698	* .8908	* .6968	*	*
	* 1.5311	* 1.3052	* 1.2899	* 1.3895	* 2.1376	* 2.7361	*	*
15	* .6838	* .8496	* .7521	* .6632	* F-SUB-Q			
	* 2.7657	* 2.2312	* 2.5204	* 2.8612	* M-SUB-Q			

AT 100% POWER, 200 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7608	* 1.1260	* 1.2788	* 1.3795	* 1.3730	* 1.3351	* 1.1205	* .6166
	* 2.4419	* 1.6515	* 1.4574	* 1.3536	* 1.3597	* 1.3988	* 1.6653	* 3.0214
9	* 1.1260	* 1.2159	* 1.3297	* 1.3611	* 1.3600	* 1.3026	* 1.2918	* .7532
	* 1.6515	* 1.5321	* 1.4040	* 1.3714	* 1.3735	* 1.4336	* 1.4470	* 2.4764
10	* 1.2788	* 1.3319	* 1.3503	* 1.3568	* 1.3167	* 1.2311	* 1.2842	* .6686
	* 1.4574	* 1.4008	* 1.3832	* 1.3777	* 1.4195	* 1.5195	* 1.4557	* 2.7946
11	* 1.3795	* 1.3622	* 1.3590	* 1.3340	* 1.3546	* 1.3134	* 1.2072	* .5884
	* 1.3536	* 1.3698	* 1.3752	* 1.4018	* 1.3846	* 1.4278	* 1.5511	* 3.1764
12	* 1.3730	* 1.3611	* 1.3167	* 1.3546	* 1.4012	* 1.3687	* .8052	*
	* 1.3597	* 1.3727	* 1.4204	* 1.3846	* 1.3388	* 1.3712	* 2.3279	*
13	* 1.3351	* 1.3015	* 1.2322	* 1.3134	* 1.3687	* 1.2723	* .6253	*
	* 1.3988	* 1.4344	* 1.5193	* 1.4271	* 1.3712	* 1.4758	* 2.9967	*
14	* 1.1205	* 1.2918	* 1.2853	* 1.2072	* .8052	* .6253	*	*
	* 1.6653	* 1.4461	* 1.4555	* 1.5511	* 2.3274	* 2.9967	*	*
15	* .6166	* .7553	* .6686	* .5884	* F-SUB-Q			
	* 3.0214	* 2.4712	* 2.7919	* 3.1729	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 36 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 200 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6307 *	* .8594 *	* .9829 *	* 1.1379 *	* 1.1108 *	* 1.0880 *	* .9006 *	* .5007 *
	* 2.9143 *	* 2.1411 *	* 1.8743 *	* 1.6208 *	* 1.6596 *	* 1.6963 *	* 2.0493 *	* 3.6870 *
9	* .8594 *	* .9407 *	* 1.0967 *	* 1.0490 *	* 1.1281 *	* 1.0230 *	* 1.0068 *	* .5874 *
	* 2.1411 *	* 1.9576 *	* 1.6805 *	* 1.7573 *	* 1.6361 *	* 1.8036 *	* 1.8346 *	* 3.1424 *
10	* .9829 *	* 1.1000 *	* 1.0458 *	* 1.1216 *	* 1.0122 *	* .9352 *	* .9732 *	* .5267 *
	* 1.8743 *	* 1.6769 *	* 1.7636 *	* 1.6462 *	* 1.8246 *	* 1.9763 *	* 1.8998 *	* 3.5057 *
11	* 1.1379 *	* 1.0501 *	* 1.1238 *	* 1.0252 *	* 1.1195 *	* 1.0512 *	* .9439 *	* .4682 *
	* 1.6208 *	* 1.7550 *	* 1.6430 *	* 1.8020 *	* 1.6538 *	* 1.7607 *	* 1.9625 *	* 3.9467 *
12	* 1.1108 *	* 1.1292 *	* 1.0122 *	* 1.1195 *	* 1.1249 *	* 1.0794 *	* .6524 *	
	* 1.6596 *	* 1.6350 *	* 1.8249 *	* 1.6538 *	* 1.6462 *	* 1.7158 *	* 2.8377 *	
13	* 1.0880 *	* 1.0230 *	* .9352 *	* 1.0523 *	* 1.0794 *	* .9840 *	* .5028 *	
	* 1.6963 *	* 1.8039 *	* 1.9763 *	* 1.7607 *	* 1.7158 *	* 1.8851 *	* 3.6835 *	
14	* .9006 *	* 1.0068 *	* .9732 *	* .9439 *	* .6524 *	* .5039 *		
	* 2.0493 *	* 1.8334 *	* 1.8995 *	* 1.9612 *	* 2.8377 *	* 3.6835 *		
15	* .5007 *	* .5884 *	* .5267 *	* .4682 *	F-SUB-Q			
	* 3.6870 *	* 3.1382 *	* 3.5015 *	* 3.9467 *	M-SUB-Q			

AT 100% POWER, 200 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .4324 *	* .3901 *	* .4519 *	* .5256 *	* .4844 *	* .4996 *	* .4042 *	* .2460 *
	* 4.2275 *	* 4.6855 *	* 4.0458 *	* 3.4808 *	* 3.7794 *	* 3.6640 *	* 4.5338 *	* 7.4700 *
9	* .3901 *	* .4443 *	* .5083 *	* .4725 *	* .5213 *	* .4595 *	* .4237 *	* .2644 *
	* 4.6855 *	* 4.1209 *	* 3.6056 *	* 3.8765 *	* 3.5162 *	* 3.9909 *	* 4.3318 *	* 6.9329 *
10	* .4519 *	* .5083 *	* .4671 *	* .5180 *	* .4595 *	* .4107 *	* .4129 *	* .2623 *
	* 4.0458 *	* 3.6001 *	* 3.9270 *	* 3.5373 *	* 3.9855 *	* 4.4701 *	* 4.4515 *	* 7.0156 *
11	* .5256 *	* .4736 *	* .5191 *	* .4638 *	* .5137 *	* .4519 *	* .3847 *	* .2276 *
	* 3.4808 *	* 3.8701 *	* 3.5320 *	* 3.9467 *	* 3.5782 *	* 4.0710 *	* 4.7748 *	* 8.0639 *
12	* .4844 *	* .5213 *	* .4595 *	* .5137 *	* .4833 *	* .4584 *	* .3262 *	
	* 3.7794 *	* 3.5162 *	* 3.9855 *	* 3.5782 *	* 3.7977 *	* 4.0168 *	* 5.6455 *	
13	* .4996 *	* .4595 *	* .4107 *	* .4519 *	* .4584 *	* .4064 *	* .2493 *	
	* 3.6640 *	* 3.9909 *	* 4.4701 *	* 4.0710 *	* 4.0168 *	* 4.5268 *	* 7.3809 *	
14	* .4042 *	* .4237 *	* .4129 *	* .3847 *	* .3262 *	* .2493 *		
	* 4.5338 *	* 4.3318 *	* 4.4515 *	* 4.7748 *	* 5.6428 *	* 7.3809 *		
15	* .2460 *	* .2655 *	* .2623 *	* .2287 *	F-SUB-Q			
	* 7.4700 *	* 6.9329 *	* 6.9948 *	* 8.0639 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 37 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 300 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .5418 *	* .5018 *	* .5440 *	* .5852 *	* .5614 *	* .5603 *	* .4833 *	* .3262 *
	* 3.1519 *	* 3.7104 *	* 3.3236 *	* 2.9738 *	* 3.1815 *	* 3.0789 *	* 3.6558 *	* 5.3629 *
9	* .5018 *	* .5408 *	* .5776 *	* .5549 *	* .5798 *	* .5375 *	* .4909 *	* .3468 *
	* 3.7104 *	* 3.3896 *	* 3.0576 *	* 3.2370 *	* 3.0023 *	* 3.3135 *	* 3.5077 *	* 5.0812 *
10	* .5440 *	* .5787 *	* .5527 *	* .5809 *	* .5451 *	* .5050 *	* .4833 *	* .3424 *
	* 3.3236 *	* 3.0532 *	* 3.3046 *	* 3.0586 *	* 3.3491 *	* 3.6088 *	* 3.6449 *	* 5.1996 *
11	* .5852 *	* .5549 *	* .5819 *	* .5451 *	* .5505 *	* .5018 *	* .4454 *	* .3002 *
	* 2.9738 *	* 3.2370 *	* 3.0576 *	* 3.4139 *	* 3.1557 *	* 3.5434 *	* 4.0049 *	* 6.1123 *
12	* .5614 *	* .5798 *	* .5462 *	* .5505 *	* .4909 *	* .4584 *	* .3858 *	
	* 3.1815 *	* 3.0023 *	* 3.3491 *	* 3.1557 *	* 3.3046 *	* 3.4849 *	* 4.5951 *	
13	* .5603 *	* .5375 *	* .5050 *	* .5018 *	* .4584 *	* .4107 *	* .3013 *	
	* 3.0789 *	* 3.3135 *	* 3.6088 *	* 3.5434 *	* 3.4849 *	* 3.8470 *	* 5.7357 *	
14	* .4833 *	* .4909 *	* .4833 *	* .4454 *	* .3858 *	* .3013 *		
	* 3.6558 *	* 3.5077 *	* 3.6449 *	* 4.0049 *	* 4.5951 *	* 5.7325 *		
15	* .3262 *	* .3468 *	* .3424 *	* .3002 *	F-SUB-Q			
	* 5.3629 *	* 5.0812 *	* 5.1899 *	* 6.1123 *	M-SUB-Q			

AT 100% POWER, 300 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7347 *	* 1.0469 *	* 1.1173 *	* 1.0783 *	* 1.1346 *	* 1.0490 *	* .9699 *	* .5982 *
	* 2.4053 *	* 1.8183 *	* 1.6643 *	* 1.6489 *	* 1.6140 *	* 1.6859 *	* 1.8635 *	* 2.9962 *
9	* 1.0469 *	* 1.0913 *	* 1.0685 *	* 1.1455 *	* 1.0718 *	* 1.1054 *	* 1.0284 *	* .7033 *
	* 1.8183 *	* 1.7365 *	* 1.6872 *	* 1.6084 *	* 1.6664 *	* 1.6558 *	* 1.7245 *	* 2.5624 *
10	* 1.1173 *	* 1.0696 *	* 1.1390 *	* 1.0739 *	* 1.1270 *	* 1.0739 *	* 1.0143 *	* .6220 *
	* 1.6643 *	* 1.6862 *	* 1.6427 *	* 1.6926 *	* 1.6747 *	* 1.7562 *	* 1.7830 *	* 2.9418 *
11	* 1.0783 *	* 1.1466 *	* 1.0739 *	* 1.1249 *	* 1.0306 *	* 1.0523 *	* .9504 *	* .5527 *
	* 1.6489 *	* 1.6072 *	* 1.6915 *	* 1.6826 *	* 1.7389 *	* 1.7543 *	* 1.9165 *	* 3.3966 *
12	* 1.1346 *	* 1.0718 *	* 1.1270 *	* 1.0306 *	* 1.0317 *	* .9916 *	* .7012 *	
	* 1.6140 *	* 1.6664 *	* 1.6760 *	* 1.7386 *	* 1.6332 *	* 1.7182 *	* 2.5992 *	
13	* 1.0490 *	* 1.1054 *	* 1.0739 *	* 1.0523 *	* .9927 *	* .9157 *	* .5570 *	
	* 1.6859 *	* 1.6558 *	* 1.7562 *	* 1.7543 *	* 1.7179 *	* 1.8537 *	* 3.2001 *	
14	* .9699 *	* 1.0284 *	* 1.0143 *	* .9504 *	* .7012 *	* .5570 *		
	* 1.8635 *	* 1.7245 *	* 1.7830 *	* 1.9165 *	* 2.5992 *	* 3.1991 *		
15	* .5982 *	* .7044 *	* .6220 *	* .5538 *	F-SUB-Q			
	* 2.9962 *	* 2.5618 *	* 2.9418 *	* 3.3966 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 38 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 300 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8865 *	* 1.2333 *	* 1.3297 *	* 1.3395 *	* 1.3492 *	* 1.3091 *	* 1.1563 *	* .7055 *
	* 2.1661 *	* 1.5795 *	* 1.4227 *	* 1.3517 *	* 1.3808 *	* 1.3721 *	* 1.5912 *	* 2.5836 *
9	* 1.2333 *	* 1.2939 *	* 1.3221 *	* 1.3687 *	* 1.3275 *	* 1.3156 *	* 1.2647 *	* .8475 *
	* 1.5795 *	* 1.4912 *	* 1.3861 *	* 1.3699 *	* 1.3670 *	* 1.4147 *	* 1.4250 *	* 2.1715 *
10	* 1.3297 *	* 1.3232 *	* 1.3611 *	* 1.3351 *	* 1.3460 *	* 1.2744 *	* 1.2701 *	* .7445 *
	* 1.4227 *	* 1.3852 *	* 1.3998 *	* 1.3879 *	* 1.4302 *	* 1.5066 *	* 1.4461 *	* 2.5043 *
11	* 1.3395 *	* 1.3698 *	* 1.3362 *	* 1.3503 *	* 1.2918 *	* 1.2636 *	* 1.1867 *	* .6632 *
	* 1.3517 *	* 1.3690 *	* 1.3870 *	* 1.4296 *	* 1.4194 *	* 1.4880 *	* 1.5623 *	* 2.8888 *
12	* 1.3492 *	* 1.3275 *	* 1.3449 *	* 1.2918 *	* 1.3243 *	* 1.2733 *	* .8377 *	
	* 1.3808 *	* 1.3670 *	* 1.4309 *	* 1.4194 *	* 1.3970 *	* 1.4070 *	* 2.2286 *	
13	* 1.3091 *	* 1.3156 *	* 1.2744 *	* 1.2636 *	* 1.2733 *	* 1.1715 *	* .6686 *	
	* 1.3721 *	* 1.4154 *	* 1.5064 *	* 1.4872 *	* 1.4068 *	* 1.5077 *	* 2.7388 *	
14	* 1.1563 *	* 1.2647 *	* 1.2701 *	* 1.1867 *	* .8377 *	* .6697 *		
	* 1.5912 *	* 1.4250 *	* 1.4461 *	* 1.5612 *	* 2.2286 *	* 2.7388 *		
15	* .7055 *	* .8485 *	* .7445 *	* .6632 *	F-SUB-Q			
	* 2.5836 *	* 2.1694 *	* 2.5043 *	* 2.8859 *	M-SUB-Q			

AT 100% POWER, 300 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9417 *	* 1.3308 *	* 1.4619 *	* 1.5378 *	* 1.4933 *	* 1.5009 *	* 1.2733 *	* .7673 *
	* 2.0984 *	* 1.4941 *	* 1.3138 *	* 1.1937 *	* 1.2675 *	* 1.2127 *	* 1.4675 *	* 2.4144 *
9	* 1.3308 *	* 1.4153 *	* 1.5107 *	* 1.5139 *	* 1.5215 *	* 1.4478 *	* 1.4294 *	* .9341 *
	* 1.4941 *	* 1.3844 *	* 1.2326 *	* 1.2585 *	* 1.2095 *	* 1.3048 *	* 1.2771 *	* 2.0019 *
10	* 1.4619 *	* 1.5118 *	* 1.5063 *	* 1.5345 *	* 1.4836 *	* 1.3882 *	* 1.4457 *	* .8193 *
	* 1.3138 *	* 1.2311 *	* 1.2864 *	* 1.2286 *	* 1.3194 *	* 1.4052 *	* 1.2872 *	* 2.3143 *
11	* 1.5378 *	* 1.5139 *	* 1.5356 *	* 1.4966 *	* 1.4890 *	* 1.4001 *	* 1.3470 *	* .7315 *
	* 1.1937 *	* 1.2578 *	* 1.2278 *	* 1.3153 *	* 1.2534 *	* 1.3681 *	* 1.3980 *	* 2.6584 *
12	* 1.4933 *	* 1.5215 *	* 1.4825 *	* 1.4890 *	* 1.4858 *	* 1.4641 *	* .9255 *	
	* 1.2675 *	* 1.2093 *	* 1.3196 *	* 1.2534 *	* 1.2834 *	* 1.2562 *	* 2.0655 *	
13	* 1.5009 *	* 1.4478 *	* 1.3882 *	* 1.4001 *	* 1.4652 *	* 1.3579 *	* .7423 *	
	* 1.2127 *	* 1.3055 *	* 1.4052 *	* 1.3681 *	* 1.2562 *	* 1.3388 *	* 2.5333 *	
14	* 1.2733 *	* 1.4294 *	* 1.4457 *	* 1.3470 *	* .9255 *	* .7423 *		
	* 1.4675 *	* 1.2771 *	* 1.2872 *	* 1.3980 *	* 2.0655 *	* 2.5327 *		
15	* .7673 *	* .9352 *	* .8193 *	* .7315 *	F-SUB-Q			
	* 2.4144 *	* 1.9997 *	* 2.3143 *	* 2.6584 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 39 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 300 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9417	* 1.3460	* 1.5009	* 1.6169	* 1.5432	* 1.5746	* 1.3102	* .7835
	* 2.1489	* 1.5058	* 1.3013	* 1.1526	* 1.2472	* 1.1735	* 1.4500	* 2.4078
9	* 1.3460	* 1.4457	* 1.5844	* 1.5605	* 1.5985	* 1.4890	* 1.4901	* .9580
	* 1.5058	* 1.3773	* 1.1926	* 1.2412	* 1.1679	* 1.2904	* 1.2431	* 1.9854
10	* 1.5009	* 1.5865	* 1.5551	* 1.6136	* 1.5258	* 1.4175	* 1.5085	* .8410
	* 1.3013	* 1.1914	* 1.2681	* 1.1852	* 1.3052	* 1.3998	* 1.2512	* 2.2946
11	* 1.6169	* 1.5616	* 1.6158	* 1.5443	* 1.5692	* 1.4489	* 1.4045	* .7521
	* 1.1526	* 1.2405	* 1.1844	* 1.2994	* 1.2120	* 1.3515	* 1.3650	* 2.6276
12	* 1.5432	* 1.5995	* 1.5258	* 1.5692	* 1.5432	* 1.5389	* .9515	*
	* 1.2472	* 1.1674	* 1.3054	* 1.2120	* 1.2659	* 1.2220	* 2.0543	*
13	* 1.5746	* 1.4890	* 1.4175	* 1.4500	* 1.5389	* 1.4327	* .7651	*
	* 1.1735	* 1.2910	* 1.3998	* 1.3515	* 1.2220	* 1.2976	* 2.5190	*
14	* 1.3102	* 1.4901	* 1.5085	* 1.4045	* .9526	* .7651	*	*
	* 1.4500	* 1.2431	* 1.2506	* 1.3650	* 2.0543	* 2.5190	*	*
15	* .7835	* .9591	* .8410	* .7532	* F-SUB-Q			
	* 2.4078	* 1.9837	* 2.2946	* 2.6276	* M-SUB-Q			

AT 100% POWER, 300 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9287	* 1.3351	* 1.5031	* 1.6396	* 1.5529	* 1.5963	* 1.3145	* .7813
	* 2.2141	* 1.5382	* 1.3235	* 1.1551	* 1.2632	* 1.1772	* 1.4729	* 2.4598
9	* 1.3351	* 1.4435	* 1.6050	* 1.5681	* 1.6212	* 1.4933	* 1.5031	* .9580
	* 1.5382	* 1.4043	* 1.1964	* 1.2589	* 1.1705	* 1.3116	* 1.2513	* 2.0230
10	* 1.5031	* 1.6071	* 1.5627	* 1.6375	* 1.5291	* 1.4142	* 1.5237	* .8410
	* 1.3235	* 1.1950	* 1.2844	* 1.1868	* 1.3253	* 1.4276	* 1.2574	* 2.3334
11	* 1.6396	* 1.5692	* 1.6386	* 1.5519	* 1.5941	* 1.4587	* 1.4164	* .7543
	* 1.1551	* 1.2582	* 1.1855	* 1.3137	* 1.2154	* 1.3736	* 1.3735	* 2.6640
12	* 1.5529	* 1.6212	* 1.5291	* 1.5941	* 1.5540	* 1.5594	* .9558	*
	* 1.2632	* 1.1704	* 1.3254	* 1.2154	* 1.2862	* 1.2330	* 2.0958	*
13	* 1.5963	* 1.4923	* 1.4142	* 1.4587	* 1.5594	* 1.4554	* .7683	*
	* 1.1772	* 1.3122	* 1.4276	* 1.3735	* 1.2330	* 1.3074	* 2.5771	*
14	* 1.3145	* 1.5031	* 1.5237	* 1.4175	* .9558	* .7683	*	*
	* 1.4729	* 1.2513	* 1.2572	* 1.3734	* 2.0958	* 2.5771	*	*
15	* .7813	* .9591	* .8410	* .7543	* F-SUB-Q			
	* 2.4598	* 2.0194	* 2.3334	* 2.6640	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 40 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 300 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9201 *	* 1.3286 *	* 1.5063 *	* 1.6570 *	* 1.5616 *	* 1.6104 *	* 1.3189 *	* .7824 *
	* 2.2536 *	* 1.5560 *	* 1.3480 *	* 1.1655 *	* 1.2836 *	* 1.1899 *	* 1.4988 *	* 2.5100 *
9	* 1.3286 *	* 1.4424 *	* 1.6212 *	* 1.5746 *	* 1.6386 *	* 1.4977 *	* 1.5150 *	* .9591 *
	* 1.5560 *	* 1.4307 *	* 1.2066 *	* 1.2802 *	* 1.1810 *	* 1.3358 *	* 1.2647 *	* 2.0607 *
10	* 1.5063 *	* 1.6234 *	* 1.5703 *	* 1.6548 *	* 1.5334 *	* 1.4131 *	* 1.5356 *	* .8442 *
	* 1.3480 *	* 1.2054 *	* 1.3047 *	* 1.1944 *	* 1.3414 *	* 1.4516 *	* 1.2679 *	* 2.3719 *
11	* 1.6570 *	* 1.5757 *	* 1.6559 *	* 1.5584 *	* 1.6125 *	* 1.4673 *	* 1.4272 *	* .7575 *
	* 1.1655 *	* 1.2794 *	* 1.1933 *	* 1.3240 *	* 1.2221 *	* 1.3922 *	* 1.3777 *	* 2.6850 *
12	* 1.5616 *	* 1.6386 *	* 1.5334 *	* 1.6125 *	* 1.5649 *	* 1.5746 *	* .9602 *	
	* 1.2836 *	* 1.1805 *	* 1.3422 *	* 1.2221 *	* 1.3024 *	* 1.2421 *	* 2.1255 *	
13	* 1.6104 *	* 1.4966 *	* 1.4131 *	* 1.4673 *	* 1.5746 *	* 1.4738 *	* .7727 *	
	* 1.1899 *	* 1.3358 *	* 1.4516 *	* 1.3914 *	* 1.2421 *	* 1.3161 *	* 2.6171 *	
14	* 1.3189 *	* 1.5150 *	* 1.5356 *	* 1.4283 *	* .9602 *	* .7727 *		
	* 1.4988 *	* 1.2647 *	* 1.2679 *	* 1.3775 *	* 2.1255 *	* 2.6171 *		
15	* .7824 *	* .9612 *	* .8442 *	* .7575 *	F-SUB-Q			
	* 2.5100 *	* 2.0585 *	* 2.3719 *	* 2.6850 *	M-SUB-Q			

AT 100% POWER, 300 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8995 *	* 1.3037 *	* 1.4868 *	* 1.6537 *	* 1.5464 *	* 1.6050 *	* 1.3037 *	* .7694 *
	* 2.3441 *	* 1.6171 *	* 1.3974 *	* 1.2013 *	* 1.3288 *	* 1.2277 *	* 1.5561 *	* 2.6184 *
9	* 1.3037 *	* 1.4218 *	* 1.6158 *	* 1.5573 *	* 1.6342 *	* 1.4793 *	* 1.5074 *	* .9461 *
	* 1.6171 *	* 1.4738 *	* 1.2418 *	* 1.3263 *	* 1.2169 *	* 1.3853 *	* 1.3045 *	* 2.1405 *
10	* 1.4868 *	* 1.6180 *	* 1.5540 *	* 1.6505 *	* 1.5150 *	* 1.3915 *	* 1.5291 *	* .8344 *
	* 1.3974 *	* 1.2404 *	* 1.3466 *	* 1.2224 *	* 1.3832 *	* 1.4994 *	* 1.3013 *	* 2.4535 *
11	* 1.6537 *	* 1.5584 *	* 1.6526 *	* 1.5410 *	* 1.6093 *	* 1.4532 *	* 1.4207 *	* .7467 *
	* 1.2013 *	* 1.3256 *	* 1.2214 *	* 1.3613 *	* 1.2473 *	* 1.4282 *	* 1.4105 *	* 2.7698 *
12	* 1.5464 *	* 1.6353 *	* 1.5150 *	* 1.6093 *	* 1.5508 *	* 1.5692 *	* .9493 *	
	* 1.3288 *	* 1.2164 *	* 1.3832 *	* 1.2473 *	* 1.3375 *	* 1.2740 *	* 2.1858 *	
13	* 1.6050 *	* 1.4793 *	* 1.3915 *	* 1.4543 *	* 1.5703 *	* 1.4727 *	* .7640 *	
	* 1.2277 *	* 1.3859 *	* 1.4994 *	* 1.4280 *	* 1.2740 *	* 1.3535 *	* 2.7051 *	
14	* 1.3037 *	* 1.5074 *	* 1.5291 *	* 1.4207 *	* .9493 *	* .7640 *		
	* 1.5561 *	* 1.3045 *	* 1.3013 *	* 1.4105 *	* 2.1858 *	* 2.7044 *		
15	* .7694 *	* .9472 *	* .8344 *	* .7467 *	F-SUB-Q			
	* 2.6184 *	* 2.1369 *	* 2.4535 *	* 2.7698 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 41 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 300 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8876	* 1.2885	* 1.4760	* 1.6516	* 1.5389	* 1.6017	* 1.2939	* .7629
	* 2.4395	* 1.6706	* 1.4472	* 1.2485	* 1.3760	* 1.2776	* 1.6155	* 2.7214
9	* 1.2885	* 1.4099	* 1.6136	* 1.5486	* 1.6321	* 1.4695	* 1.5031	* .9385
	* 1.6706	* 1.5218	* 1.2872	* 1.3733	* 1.2646	* 1.4355	* 1.3566	* 2.2191
10	* 1.4760	* 1.6158	* 1.5443	* 1.6483	* 1.5042	* 1.3785	* 1.5248	* .8279
	* 1.4472	* 1.2857	* 1.3878	* 1.2629	* 1.4238	* 1.5480	* 1.3457	* 2.5339
11	* 1.6516	* 1.5497	* 1.6494	* 1.5302	* 1.6082	* 1.4467	* 1.4153	* .7413
	* 1.2485	* 1.3725	* 1.2615	* 1.4064	* 1.2907	* 1.4691	* 1.4642	* 2.8486
12	* 1.5389	* 1.6331	* 1.5031	* 1.6071	* 1.5432	* 1.5659	* .9428	*
	* 1.3760	* 1.2639	* 1.4242	* 1.2907	* 1.3775	* 1.3155	* 2.2507	*
13	* 1.6017	* 1.4684	* 1.3785	* 1.4467	* 1.5659	* 1.4706	* .7586	*
	* 1.2776	* 1.4364	* 1.5480	* 1.4691	* 1.3155	* 1.3965	* 2.7820	*
14	* 1.2939	* 1.5031	* 1.5248	* 1.4164	* .9428	* .7586	*	*
	* 1.6155	* 1.3566	* 1.3457	* 1.4635	* 2.2507	* 2.7820	*	*
15	* .7629	* .9396	* .8279	* .7413	* F-SUB-Q			
	* 2.7214	* 2.2153	* 2.5339	* 2.8467	* M-SUB-Q			

AT 100% POWER, 300 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8648	* 1.2582	* 1.4467	* 1.6190	* 1.5107	* 1.5692	* 1.2679	* .7467
	* 2.5696	* 1.7623	* 1.5278	* 1.3300	* 1.4527	* 1.3619	* 1.7067	* 2.8763
9	* 1.2582	* 1.3795	* 1.5811	* 1.5193	* 1.5995	* 1.4402	* 1.4727	* .9179
	* 1.7623	* 1.6061	* 1.3693	* 1.4498	* 1.3464	* 1.5170	* 1.4446	* 2.3435
10	* 1.4467	* 1.5822	* 1.5161	* 1.6158	* 1.4738	* 1.3481	* 1.4933	* .8106
	* 1.5278	* 1.3676	* 1.4596	* 1.3398	* 1.4983	* 1.6311	* 1.4279	* 2.6692
11	* 1.6190	* 1.5204	* 1.6169	* 1.5009	* 1.5757	* 1.4186	* 1.3850	* .7250
	* 1.3300	* 1.4489	* 1.3387	* 1.4764	* 1.3746	* 1.5508	* 1.5505	* 2.9873
12	* 1.5107	* 1.5995	* 1.4738	* 1.5757	* 1.5139	* 1.5345	* .9244	*
	* 1.4527	* 1.3458	* 1.4993	* 1.3746	* 1.4545	* 1.3998	* 2.3754	*
13	* 1.5692	* 1.4392	* 1.3481	* 1.4196	* 1.5345	* 1.4424	* .7423	*
	* 1.3619	* 1.5180	* 1.6311	* 1.5506	* 1.3998	* 1.4858	* 2.9361	*
14	* 1.2679	* 1.4727	* 1.4933	* 1.3850	* .9244	* .7434	*	*
	* 1.7067	* 1.4444	* 1.4274	* 1.5505	* 2.3736	* 2.9361	*	*
15	* .7467	* .9190	* .8106	* .7250	* F-SUB-Q			
	* 2.8763	* 2.3407	* 2.6678	* 2.9873	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 42 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 300 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8605 *	* 1.2517 *	* 1.4457 *	* 1.6364 *	* 1.5128 *	* 1.5833 *	* 1.2668 *	* .7434 *
	* 2.6280 *	* 1.8000 *	* 1.5550 *	* 1.3558 *	* 1.4838 *	* 1.4021 *	* 1.7753 *	* 3.0035 *
9	* 1.2517 *	* 1.3763 *	* 1.5963 *	* 1.5204 *	* 1.6147 *	* 1.4392 *	* 1.4847 *	* .9157 *
	* 1.8000 *	* 1.6358 *	* 1.3919 *	* 1.4781 *	* 1.3753 *	* 1.5623 *	* 1.4987 *	* 2.4388 *
10	* 1.4457 *	* 1.5985 *	* 1.5172 *	* 1.6321 *	* 1.4727 *	* 1.3427 *	* 1.5053 *	* .8106 *
	* 1.5550 *	* 1.3902 *	* 1.4857 *	* 1.3647 *	* 1.5335 *	* 1.6818 *	* 1.4804 *	* 2.7670 *
11	* 1.6364 *	* 1.5215 *	* 1.6331 *	* 1.5009 *	* 1.5909 *	* 1.4218 *	* 1.3936 *	* .7239 *
	* 1.3558 *	* 1.4772 *	* 1.3631 *	* 1.5078 *	* 1.4150 *	* 1.6052 *	* 1.6075 *	* 3.1007 *
12	* 1.5128 *	* 1.6158 *	* 1.4717 *	* 1.5909 *	* 1.5183 *	* 1.5497 *	* .9233 *	
	* 1.4838 *	* 1.3744 *	* 1.5335 *	* 1.4150 *	* 1.5082 *	* 1.4530 *	* 2.4574 *	
13	* 1.5833 *	* 1.4381 *	* 1.3427 *	* 1.4218 *	* 1.5497 *	* 1.4554 *	* .7423 *	
	* 1.4021 *	* 1.5634 *	* 1.6818 *	* 1.6043 *	* 1.4525 *	* 1.5460 *	* 3.0462 *	
14	* 1.2668 *	* 1.4847 *	* 1.5063 *	* 1.3936 *	* .9233 *	* .7423 *		
	* 1.7753 *	* 1.4987 *	* 1.4804 *	* 1.6075 *	* 2.4574 *	* 3.0462 *		
15	* .7434 *	* .9168 *	* .8106 *	* .7239 *	F-SUB-Q			
	* 3.0035 *	* 2.4342 *	* 2.7663 *	* 3.1007 *	M-SUB-Q			

AT 100% POWER, 300 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8496 *	* 1.2387 *	* 1.4359 *	* 1.6342 *	* 1.5063 *	* 1.5800 *	* 1.2571 *	* .7358 *
	* 2.6656 *	* 1.8254 *	* 1.5743 *	* 1.3769 *	* 1.4998 *	* 1.4247 *	* 1.7947 *	* 3.0583 *
9	* 1.2387 *	* 1.3655 *	* 1.5941 *	* 1.5118 *	* 1.6125 *	* 1.4294 *	* 1.4793 *	* .9071 *
	* 1.8254 *	* 1.6566 *	* 1.4144 *	* 1.4960 *	* 1.3975 *	* 1.5817 *	* 1.5242 *	* 2.4875 *
10	* 1.4359 *	* 1.5963 *	* 1.5085 *	* 1.6299 *	* 1.4619 *	* 1.3297 *	* 1.4998 *	* .8041 *
	* 1.5743 *	* 1.4127 *	* 1.5046 *	* 1.3892 *	* 1.5555 *	* 1.7097 *	* 1.5084 *	* 2.8160 *
11	* 1.6342 *	* 1.5128 *	* 1.6310 *	* 1.4912 *	* 1.5887 *	* 1.4131 *	* 1.3871 *	* .7174 *
	* 1.3769 *	* 1.4950 *	* 1.3875 *	* 1.5311 *	* 1.4459 *	* 1.6335 *	* 1.6420 *	* 3.1699 *
12	* 1.5063 *	* 1.6136 *	* 1.4608 *	* 1.5876 *	* 1.5107 *	* 1.5464 *	* .9168 *	
	* 1.4998 *	* 1.3975 *	* 1.5565 *	* 1.4459 *	* 1.5341 *	* 1.4921 *	* 2.5141 *	
13	* 1.5800 *	* 1.4283 *	* 1.3308 *	* 1.4131 *	* 1.5464 *	* 1.4511 *	* .7369 *	
	* 1.4247 *	* 1.5828 *	* 1.7097 *	* 1.6324 *	* 1.4921 *	* 1.5938 *	* 3.1402 *	
14	* 1.2571 *	* 1.4793 *	* 1.4998 *	* 1.3871 *	* .9168 *	* .7369 *		
	* 1.7947 *	* 1.5242 *	* 1.5084 *	* 1.6420 *	* 2.5141 *	* 3.1402 *		
15	* .7358 *	* .9092 *	* .8041 *	* .7174 *	F-SUB-Q			
	* 3.0583 *	* 2.4822 *	* 2.8160 *	* 3.1699 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 43 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 300 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8377	* 1.2235	* 1.4207	* 1.6201	* 1.4923	* 1.5638	* 1.2441	* .7272
	* 2.7109	* 1.8528	* 1.5953	* 1.3998	* 1.5181	* 1.4489	* 1.8156	* 3.0961
9	* 1.2235	* 1.3503	* 1.5779	* 1.4977	* 1.5963	* 1.4142	* 1.4630	* .8962
	* 1.8528	* 1.6796	* 1.4392	* 1.5152	* 1.4218	* 1.6029	* 1.5511	* 2.5193
10	* 1.4207	* 1.5800	* 1.4944	* 1.6136	* 1.4457	* 1.3145	* 1.4836	* .7944
	* 1.5953	* 1.4374	* 1.5240	* 1.4132	* 1.5782	* 1.7353	* 1.5359	* 2.8556
11	* 1.6201	* 1.4988	* 1.6158	* 1.4749	* 1.5714	* 1.3991	* 1.3709	* .7087
	* 1.3998	* 1.5142	* 1.4116	* 1.5532	* 1.4734	* 1.6571	* 1.6736	* 3.2146
12	* 1.4923	* 1.5974	* 1.4446	* 1.5714	* 1.4955	* 1.5302	* .9071	*
	* 1.5181	* 1.4209	* 1.5792	* 1.4734	* 1.5573	* 1.5210	* 2.5521	*
13	* 1.5638	* 1.4131	* 1.3145	* 1.3991	* 1.5302	* 1.4359	* .7282	*
	* 1.4489	* 1.6029	* 1.7353	* 1.6559	* 1.5210	* 1.6250	* 3.1884	*
14	* 1.2441	* 1.4630	* 1.4836	* 1.3709	* .9071	* .7282	*	*
	* 1.8156	* 1.5511	* 1.5349	* 1.6736	* 2.5521	* 3.1884	*	*
15	* .7272	* .8984	* .7944	* .7087	* F-SUB-Q			
	* 3.0961	* 2.5166	* 2.8522	* 3.2146	* M-SUB-Q			

AT 100% POWER, 300 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8431	* 1.2343	* 1.4381	* 1.6505	* 1.5128	* 1.5909	* 1.2593	* .7347
	* 2.6744	* 1.8312	* 1.5761	* 1.3769	* 1.4997	* 1.4252	* 1.7908	* 3.0483
9	* 1.2343	* 1.3655	* 1.6060	* 1.5161	* 1.6255	* 1.4316	* 1.4879	* .9071
	* 1.8312	* 1.6594	* 1.4158	* 1.4969	* 1.3981	* 1.5835	* 1.5240	* 2.4795
10	* 1.4381	* 1.6082	* 1.5139	* 1.6440	* 1.4630	* 1.3275	* 1.5096	* .8052
	* 1.5761	* 1.4132	* 1.5055	* 1.3907	* 1.5614	* 1.7176	* 1.5084	* 2.8046
11	* 1.6505	* 1.5183	* 1.6451	* 1.4944	* 1.5995	* 1.4175	* 1.3926	* .7174
	* 1.3769	* 1.4959	* 1.3891	* 1.5359	* 1.4516	* 1.6375	* 1.6443	* 3.1585
12	* 1.5128	* 1.6266	* 1.4619	* 1.5995	* 1.5161	* 1.5584	* .9179	*
	* 1.4997	* 1.3981	* 1.5625	* 1.4525	* 1.5430	* 1.4997	* 2.5139	*
13	* 1.5909	* 1.4305	* 1.3275	* 1.4186	* 1.5584	* 1.4619	* .7380	*
	* 1.4252	* 1.5845	* 1.7176	* 1.6375	* 1.4997	* 1.6018	* 3.1416	*
14	* 1.2593	* 1.4879	* 1.5096	* 1.3926	* .9190	* .7380	*	*
	* 1.7908	* 1.5240	* 1.5084	* 1.6443	* 2.5139	* 3.1374	*	*
15	* .7347	* .9092	* .8052	* .7174	* F-SUB-Q			
	* 3.0483	* 2.4743	* 2.8046	* 3.1585	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 44 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 300 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8431 *	* 1.2376 *	* 1.4457 *	* 1.6689 *	* 1.5237 *	* 1.6071 *	* 1.2658 *	* .7369 *
	* 2.5932 *	* 1.7707 *	* 1.5223 *	* 1.3244 *	* 1.4482 *	* 1.3714 *	* 1.7289 *	* 2.9460 *
9	* 1.2376 *	* 1.3720 *	* 1.6234 *	* 1.5258 *	* 1.6440 *	* 1.4392 *	* 1.5031 *	* .9114 *
	* 1.7707 *	* 1.6031 *	* 1.3612 *	* 1.4464 *	* 1.3456 *	* 1.5301 *	* 1.4653 *	* 2.3900 *
10	* 1.4457 *	* 1.6255 *	* 1.5237 *	* 1.6613 *	* 1.4695 *	* 1.3319 *	* 1.5248 *	* .8095 *
	* 1.5223 *	* 1.3596 *	* 1.4536 *	* 1.3372 *	* 1.5094 *	* 1.6606 *	* 1.4499 *	* 2.7024 *
11	* 1.6689 *	* 1.5269 *	* 1.6635 *	* 1.5020 *	* 1.6169 *	* 1.4272 *	* 1.4056 *	* .7196 *
	* 1.3244 *	* 1.4455 *	* 1.3363 *	* 1.4837 *	* 1.3972 *	* 1.5800 *	* 1.5813 *	* 3.0448 *
12	* 1.5237 *	* 1.6440 *	* 1.4695 *	* 1.6169 *	* 1.5269 *	* 1.5757 *	* .9233 *	
	* 1.4482 *	* 1.3448 *	* 1.5103 *	* 1.3973 *	* 1.4909 *	* 1.4425 *	* 2.4217 *	
13	* 1.6071 *	* 1.4381 *	* 1.3319 *	* 1.4272 *	* 1.5757 *	* 1.4771 *	* .7413 *	
	* 1.3714 *	* 1.5310 *	* 1.6606 *	* 1.5790 *	* 1.4417 *	* 1.5396 *	* 3.0247 *	
14	* 1.2658 *	* 1.5031 *	* 1.5248 *	* 1.4056 *	* .9233 *	* .7413 *		
	* 1.7289 *	* 1.4653 *	* 1.4499 *	* 1.5812 *	* 2.4217 *	* 3.0208 *		
15	* .7369 *	* .9125 *	* .8095 *	* .7196 *	F-SUB-Q			
	* 2.9460 *	* 2.3876 *	* 2.7024 *	* 3.0445 *	M-SUB-Q			

AT 100% POWER, 300 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8453 *	* 1.2430 *	* 1.4543 *	* 1.6830 *	* 1.5334 *	* 1.6201 *	* 1.2733 *	* .7391 *
	* 2.5248 *	* 1.7193 *	* 1.4751 *	* 1.2797 *	* 1.4014 *	* 1.3265 *	* 1.6761 *	* 2.8610 *
9	* 1.2430 *	* 1.3795 *	* 1.6364 *	* 1.5356 *	* 1.6570 *	* 1.4478 *	* 1.5150 *	* .9146 *
	* 1.7193 *	* 1.5549 *	* 1.3162 *	* 1.4006 *	* 1.3008 *	* 1.4823 *	* 1.4156 *	* 2.3183 *
10	* 1.4543 *	* 1.6386 *	* 1.5334 *	* 1.6754 *	* 1.4782 *	* 1.3384 *	* 1.5367 *	* .8128 *
	* 1.4751 *	* 1.3147 *	* 1.4080 *	* 1.2923 *	* 1.4621 *	* 1.6098 *	* 1.4003 *	* 2.6194 *
11	* 1.6830 *	* 1.5378 *	* 1.6776 *	* 1.5118 *	* 1.6299 *	* 1.4370 *	* 1.4153 *	* .7217 *
	* 1.2797 *	* 1.3997 *	* 1.2909 *	* 1.4363 *	* 1.3482 *	* 1.5261 *	* 1.5273 *	* 2.9536 *
12	* 1.5334 *	* 1.6570 *	* 1.4771 *	* 1.6288 *	* 1.5367 *	* 1.5887 *	* .9266 *	
	* 1.4014 *	* 1.3001 *	* 1.4630 *	* 1.3482 *	* 1.4403 *	* 1.3902 *	* 2.3432 *	
13	* 1.6201 *	* 1.4467 *	* 1.3384 *	* 1.4370 *	* 1.5887 *	* 1.4901 *	* .7445 *	
	* 1.3265 *	* 1.4832 *	* 1.6098 *	* 1.5252 *	* 1.3902 *	* 1.4828 *	* 2.9240 *	
14	* 1.2733 *	* 1.5150 *	* 1.5367 *	* 1.4164 *	* .9276 *	* .7445 *		
	* 1.6761 *	* 1.4156 *	* 1.4003 *	* 1.5273 *	* 2.3432 *	* 2.9240 *		
15	* .7391 *	* .9168 *	* .8128 *	* .7228 *	F-SUB-Q			
	* 2.8610 *	* 2.3138 *	* 2.6192 *	* 2.9536 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 45 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 300 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8475 *	* 1.2484 *	* 1.4641 *	* 1.6884 *	* 1.5443 *	* 1.6245 *	* 1.2809 *	* .7423 *
	* 2.4678 *	* 1.6777 *	* 1.4377 *	* 1.2498 *	* 1.3638 *	* 1.2949 *	* 1.6310 *	* 2.7904 *
9	* 1.2484 *	* 1.3871 *	* 1.6407 *	* 1.5464 *	* 1.6613 *	* 1.4554 *	* 1.5193 *	* .9179 *
	* 1.6777 *	* 1.5152 *	* 1.2866 *	* 1.3638 *	* 1.2699 *	* 1.4428 *	* 1.3811 *	* 2.2594 *
10	* 1.4641 *	* 1.6429 *	* 1.5432 *	* 1.6808 *	* 1.4868 *	* 1.3449 *	* 1.5410 *	* .8149 *
	* 1.4377 *	* 1.2845 *	* 1.3701 *	* 1.2611 *	* 1.4229 *	* 1.5672 *	* 1.3651 *	* 2.5521 *
11	* 1.6884 *	* 1.5475 *	* 1.6819 *	* 1.5204 *	* 1.6342 *	* 1.4446 *	* 1.4196 *	* .7250 *
	* 1.2498 *	* 1.3622 *	* 1.2598 *	* 1.3968 *	* 1.3135 *	* 1.4814 *	* 1.4890 *	* 2.8784 *
12	* 1.5443 *	* 1.6624 *	* 1.4858 *	* 1.6342 *	* 1.5464 *	* 1.5930 *	* .9309 *	
	* 1.3638 *	* 1.2692 *	* 1.4237 *	* 1.3135 *	* 1.3980 *	* 1.3516 *	* 2.2787 *	
13	* 1.6245 *	* 1.4554 *	* 1.3460 *	* 1.4457 *	* 1.5930 *	* 1.4944 *	* .7467 *	
	* 1.2949 *	* 1.4437 *	* 1.5672 *	* 1.4805 *	* 1.3516 *	* 1.4414 *	* 2.8434 *	
14	* 1.2809 *	* 1.5193 *	* 1.5421 *	* 1.4196 *	* .9309 *	* .7467 *		
	* 1.6310 *	* 1.3811 *	* 1.3651 *	* 1.4889 *	* 2.2766 *	* 2.8434 *		
15	* .7423 *	* .9201 *	* .8149 *	* .7250 *	F-SUB-Q			
	* 2.7904 *	* 2.2571 *	* 2.5521 *	* 2.8751 *	M-SUB-Q			

AT 100% POWER, 300 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8615 *	* 1.2723 *	* 1.4944 *	* 1.7383 *	* 1.5800 *	* 1.6721 *	* 1.3069 *	* .7543 *
	* 2.3714 *	* 1.6090 *	* 1.3743 *	* 1.1845 *	* 1.3030 *	* 1.2311 *	* 1.5678 *	* 2.6982 *
9	* 1.2723 *	* 1.4164 *	* 1.6884 *	* 1.5800 *	* 1.7101 *	* 1.4879 *	* 1.5627 *	* .9363 *
	* 1.6090 *	* 1.4493 *	* 1.2196 *	* 1.3024 *	* 1.2047 *	* 1.3818 *	* 1.3161 *	* 2.1788 *
10	* 1.4944 *	* 1.6906 *	* 1.5779 *	* 1.7296 *	* 1.5183 *	* 1.3730 *	* 1.5876 *	* .8323 *
	* 1.3743 *	* 1.2178 *	* 1.3074 *	* 1.1951 *	* 1.3600 *	* 1.5032 *	* 1.2996 *	* 2.4547 *
11	* 1.7383 *	* 1.5822 *	* 1.7318 *	* 1.5540 *	* 1.6819 *	* 1.4793 *	* 1.4597 *	* .7380 *
	* 1.1845 *	* 1.3016 *	* 1.1940 *	* 1.3328 *	* 1.2427 *	* 1.4124 *	* 1.4175 *	* 2.7739 *
12	* 1.5800 *	* 1.7112 *	* 1.5172 *	* 1.6819 *	* 1.5833 *	* 1.6407 *	* .9504 *	
	* 1.3030 *	* 1.2041 *	* 1.3607 *	* 1.2427 *	* 1.3279 *	* 1.2802 *	* 2.1851 *	
13	* 1.6721 *	* 1.4868 *	* 1.3730 *	* 1.4793 *	* 1.6407 *	* 1.5389 *	* .7618 *	
	* 1.2311 *	* 1.3826 *	* 1.5032 *	* 1.4116 *	* 1.2801 *	* 1.3655 *	* 2.7259 *	
14	* 1.3069 *	* 1.5638 *	* 1.5876 *	* 1.4597 *	* .9504 *	* .7618 *		
	* 1.5678 *	* 1.3161 *	* 1.2996 *	* 1.4175 *	* 2.1851 *	* 2.7257 *		
15	* .7543 *	* .9374 *	* .8323 *	* .7380 *	F-SUB-Q			
	* 2.6982 *	* 2.1748 *	* 2.4545 *	* 2.7708 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 46 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 300 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8691	* 1.2853	* 1.5107	* 1.7578	* 1.5985	* 1.6917	* 1.3210	* .7586
	* 2.2847	* 1.5482	* 1.3217	* 1.1387	* 1.2512	* 1.1826	* 1.5081	* 2.6117
9	* 1.2853	* 1.4305	* 1.7057	* 1.5985	* 1.7285	* 1.5053	* 1.5811	* .9428
	* 1.5482	* 1.3946	* 1.1733	* 1.2513	* 1.1583	* 1.3276	* 1.2644	* 2.1061
10	* 1.5107	* 1.7079	* 1.5952	* 1.7491	* 1.5356	* 1.3882	* 1.6060	* .8388
	* 1.3217	* 1.1716	* 1.2566	* 1.1480	* 1.3063	* 1.4441	* 1.2472	* 2.3718
11	* 1.7578	* 1.6006	* 1.7502	* 1.5714	* 1.7003	* 1.4977	* 1.4771	* .7423
	* 1.1387	* 1.2500	* 1.1469	* 1.2799	* 1.1897	* 1.3504	* 1.3603	* 2.6841
12	* 1.5985	* 1.7296	* 1.5345	* 1.7003	* 1.6039	* 1.6591	* .9591	*
	* 1.2512	* 1.1578	* 1.3070	* 1.1897	* 1.2647	* 1.2226	* 2.0970	*
13	* 1.6917	* 1.5042	* 1.3893	* 1.4988	* 1.6602	* 1.5573	* .7673	*
	* 1.1826	* 1.3284	* 1.4433	* 1.3498	* 1.2226	* 1.3040	* 2.6229	*
14	* 1.3210	* 1.5822	* 1.6071	* 1.4771	* .9602	* .7683	*	*
	* 1.5081	* 1.2637	* 1.2467	* 1.3596	* 2.0970	* 2.6229	*	*
15	* .7586	* .9450	* .8388	* .7423	* F-SUB-Q			
	* 2.6117	* 2.1024	* 2.3718	* 2.6815	* M-SUB-Q			

AT 100% POWER, 300 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8605	* 1.2766	* 1.4977	* 1.7274	* 1.5865	* 1.6646	* 1.3102	* .7499
	* 2.2527	* 1.5232	* 1.3026	* 1.1318	* 1.2318	* 1.1739	* 1.4871	* 2.5826
9	* 1.2766	* 1.4186	* 1.6732	* 1.5855	* 1.6982	* 1.4955	* 1.5584	* .9309
	* 1.5232	* 1.3746	* 1.1677	* 1.2325	* 1.1513	* 1.3061	* 1.2534	* 2.0861
10	* 1.4977	* 1.6765	* 1.5822	* 1.7187	* 1.5248	* 1.3806	* 1.5833	* .8269
	* 1.3026	* 1.1659	* 1.2383	* 1.1405	* 1.2849	* 1.4175	* 1.2353	* 2.3505
11	* 1.7274	* 1.5876	* 1.7198	* 1.5584	* 1.6721	* 1.4868	* 1.4543	* .7315
	* 1.1318	* 1.2312	* 1.1394	* 1.2588	* 1.1780	* 1.3245	* 1.3472	* 2.6586
12	* 1.5865	* 1.6992	* 1.5237	* 1.6711	* 1.5930	* 1.6342	* .9493	*
	* 1.2318	* 1.1507	* 1.2856	* 1.1785	* 1.2389	* 1.2082	* 2.0648	*
13	* 1.6646	* 1.4944	* 1.3817	* 1.4879	* 1.6342	* 1.5334	* .7575	*
	* 1.1739	* 1.3069	* 1.4175	* 1.3238	* 1.2082	* 1.2874	* 2.5903	*
14	* 1.3102	* 1.5584	* 1.5833	* 1.4554	* .9504	* .7575	*	*
	* 1.4871	* 1.2533	* 1.2347	* 1.3465	* 2.0648	* 2.5875	*	*
15	* .7499	* .9320	* .8269	* .7326	* F-SUB-Q			
	* 2.5826	* 2.0824	* 2.3501	* 2.6586	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 47 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 300 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8550	* 1.2679	* 1.4825	* 1.7014	* 1.5746	* 1.6429	* 1.2972	* .7391
	* 2.2281	* 1.5074	* 1.2923	* 1.1276	* 1.2184	* 1.1674	* 1.4729	* 2.5734
9	* 1.2679	* 1.4034	* 1.6440	* 1.5714	* 1.6732	* 1.4847	* 1.5367	* .9146
	* 1.5074	* 1.3636	* 1.1669	* 1.2204	* 1.1472	* 1.2908	* 1.2470	* 2.0848
10	* 1.4825	* 1.6472	* 1.5659	* 1.6906	* 1.5107	* 1.3730	* 1.5638	* .8149
	* 1.2923	* 1.1646	* 1.2272	* 1.1371	* 1.2715	* 1.3991	* 1.2266	* 2.3415
11	* 1.7014	* 1.5735	* 1.6917	* 1.5432	* 1.6483	* 1.4782	* 1.4359	* .7185
	* 1.1276	* 1.2196	* 1.1360	* 1.2473	* 1.1702	* 1.3044	* 1.3373	* 2.6578
12	* 1.5746	* 1.6732	* 1.5096	* 1.6483	* 1.5833	* 1.6136	* .9407	*
	* 1.2184	* 1.1467	* 1.2722	* 1.1703	* 1.2191	* 1.1959	* 2.0446	*
13	* 1.6429	* 1.4836	* 1.3730	* 1.4793	* 1.6136	* 1.5139	* .7488	*
	* 1.1674	* 1.2915	* 1.3991	* 1.3037	* 1.1958	* 1.2758	* 2.5678	*
14	* 1.2972	* 1.5367	* 1.5638	* 1.4370	* .9407	* .7488	*	*
	* 1.4729	* 1.2464	* 1.2261	* 1.3366	* 2.0443	* 2.5650	*	*
15	* .7391	* .9157	* .8149	* .7185	* F-SUB-Q			
	* 2.5734	* 2.0795	* 2.3412	* 2.6553	* M-SUB-Q			

AT 100% POWER, 300 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8030	* 1.1888	* 1.3839	* 1.5638	* 1.4793	* 1.5096	* 1.2148	* .6881
	* 2.3391	* 1.5857	* 1.3650	* 1.2095	* 1.2782	* 1.2520	* 1.5507	* 2.7281
9	* 1.1888	* 1.3113	* 1.5085	* 1.4695	* 1.5378	* 1.3936	* 1.4131	* .8420
	* 1.5857	* 1.4388	* 1.2539	* 1.2865	* 1.2301	* 1.3550	* 1.3357	* 2.2320
10	* 1.3839	* 1.5107	* 1.4619	* 1.5508	* 1.4131	* 1.2874	* 1.4272	* .7521
	* 1.3650	* 1.2520	* 1.2942	* 1.2210	* 1.3397	* 1.4709	* 1.3239	* 2.5046
11	* 1.5638	* 1.4717	* 1.5529	* 1.4402	* 1.5161	* 1.3882	* 1.3134	* .6611
	* 1.2095	* 1.2852	* 1.2198	* 1.3158	* 1.2527	* 1.3676	* 1.4405	* 2.8497
12	* 1.4793	* 1.5389	* 1.4121	* 1.5150	* 1.4868	* 1.4890	* .8778	*
	* 1.2782	* 1.2295	* 1.3404	* 1.2533	* 1.2777	* 1.2754	* 2.1568	*
13	* 1.5096	* 1.3936	* 1.2874	* 1.3882	* 1.4890	* 1.3871	* .6957	*
	* 1.2520	* 1.3558	* 1.4700	* 1.3669	* 1.2747	* 1.3687	* 2.7187	*
14	* 1.2148	* 1.4131	* 1.4272	* 1.3145	* .8778	* .6957	*	*
	* 1.5507	* 1.3357	* 1.3238	* 1.4397	* 2.1548	* 2.7183	*	*
15	* .6881	* .8442	* .7521	* .6611	* F-SUB-Q			
	* 2.7281	* 2.2278	* 2.5020	* 2.8462	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 48 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 300 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6871 *	* .9439 *	* 1.1010 *	* 1.3232 *	* 1.2343 *	* 1.2614 *	* 1.0122 *	* .5765 *
	* 2.7067 *	* 1.9766 *	* 1.6983 *	* 1.4133 *	* 1.5145 *	* 1.4815 *	* 1.8425 *	* 3.2244 *
9	* .9439 *	* 1.0501 *	* 1.2809 *	* 1.1704 *	* 1.3080 *	* 1.1346 *	* 1.1487 *	* .6784 *
	* 1.9766 *	* 1.7780 *	* 1.4601 *	* 1.5975 *	* 1.4297 *	* 1.6467 *	* 1.6248 *	* 2.7426 *
10	* 1.1010 *	* 1.2842 *	* 1.1693 *	* 1.3048 *	* 1.1227 *	* 1.0187 *	* 1.1238 *	* .6145 *
	* 1.6983 *	* 1.4575 *	* 1.5997 *	* 1.4350 *	* 1.6665 *	* 1.8375 *	* 1.6625 *	* 3.0307 *
11	* 1.3232 *	* 1.1715 *	* 1.3069 *	* 1.1433 *	* 1.2853 *	* 1.1552 *	* 1.0653 *	* .5451 *
	* 1.4133 *	* 1.5964 *	* 1.4325 *	* 1.6396 *	* 1.4610 *	* 1.6230 *	* 1.7563 *	* 3.4203 *
12	* 1.2343 *	* 1.3091 *	* 1.1227 *	* 1.2853 *	* 1.2365 *	* 1.2257 *	* .7358 *	
	* 1.5145 *	* 1.4289 *	* 1.6675 *	* 1.4610 *	* 1.5175 *	* 1.5304 *	* 2.5444 *	
13	* 1.2614 *	* 1.1346 *	* 1.0187 *	* 1.1552 *	* 1.2257 *	* 1.1086 *	* .5787 *	
	* 1.4815 *	* 1.6467 *	* 1.8373 *	* 1.6219 *	* 1.5304 *	* 1.6925 *	* 3.2327 *	
14	* 1.0122 *	* 1.1487 *	* 1.1238 *	* 1.0653 *	* .7358 *	* .5787 *		
	* 1.8425 *	* 1.6238 *	* 1.6612 *	* 1.7539 *	* 2.5416 *	* 3.2289 *		
15	* .5765 *	* .6795 *	* .6145 *	* .5451 *	F-SUB-Q			
	* 3.2244 *	* 2.7362 *	* 3.0273 *	* 3.4153 *	M-SUB-Q			

AT 100% POWER, 300 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .4887 *	* .4530 *	* .5267 *	* .6112 *	* .5646 *	* .5809 *	* .4736 *	* .2948 *
	* 3.7791 *	* 4.0922 *	* 3.5224 *	* 3.0371 *	* 3.2879 *	* 3.1916 *	* 3.9104 *	* 6.2619 *
9	* .4530 *	* .5148 *	* .5917 *	* .5484 *	* .6036 *	* .5332 *	* .4985 *	* .3186 *
	* 4.0922 *	* 3.6011 *	* 3.1355 *	* 3.3798 *	* 3.0717 *	* 3.4800 *	* 3.7178 *	* 5.7963 *
10	* .5267 *	* .5928 *	* .5429 *	* .6025 *	* .5332 *	* .4736 *	* .4855 *	* .3154 *
	* 3.5224 *	* 3.1313 *	* 3.4177 *	* 3.0832 *	* 3.4814 *	* 3.9122 *	* 3.8170 *	* 5.8540 *
11	* .6112 *	* .5494 *	* .6036 *	* .5397 *	* .5906 *	* .5213 *	* .4519 *	* .2753 *
	* 3.0371 *	* 3.3798 *	* 3.0797 *	* 3.4420 *	* 3.1500 *	* 3.5654 *	* 4.1079 *	* 6.7118 *
12	* .5646 *	* .6036 *	* .5332 *	* .5906 *	* .5592 *	* .5310 *	* .3825 *	
	* 3.2879 *	* 3.0711 *	* 3.4814 *	* 3.1500 *	* 3.3272 *	* 3.5031 *	* 4.8564 *	
13	* .5809 *	* .5321 *	* .4736 *	* .5213 *	* .5310 *	* .4757 *	* .2980 *	
	* 3.1916 *	* 3.4800 *	* 3.9122 *	* 3.5654 *	* 3.5031 *	* 3.9096 *	* 6.2288 *	
14	* .4736 *	* .4985 *	* .4855 *	* .4519 *	* .3825 *	* .2980 *		
	* 3.9104 *	* 3.7127 *	* 3.8170 *	* 4.1007 *	* 4.8478 *	* 6.2288 *		
15	* .2948 *	* .3186 *	* .3164 *	* .2753 *	F-SUB-Q			
	* 6.2619 *	* 5.7840 *	* 5.8520 *	* 6.7118 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 49 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 470 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6600 *	* .6340 *	* .6947 *	* .7434 *	* .7261 *	* .7207 *	* .6372 *	* .4487 *
	* 2.6023 *	* 3.0250 *	* 2.6956 *	* 2.4254 *	* 2.5490 *	* 2.4804 *	* 2.8744 *	* 4.0488 *
9	* .6340 *	* .6838 *	* .7315 *	* .7163 *	* .7391 *	* .6979 *	* .6448 *	* .4779 *
	* 3.0250 *	* 2.7694 *	* 2.4974 *	* 2.5993 *	* 2.4394 *	* 2.6511 *	* 2.7698 *	* 3.8355 *
10	* .6947 *	* .7326 *	* .7131 *	* .7402 *	* .7044 *	* .6535 *	* .6361 *	* .4714 *
	* 2.6956 *	* 2.4950 *	* 2.6517 *	* 2.4868 *	* 2.6996 *	* 2.8942 *	* 2.8725 *	* 3.9167 *
11	* .7434 *	* .7163 *	* .7402 *	* .7055 *	* .7087 *	* .6567 *	* .5939 *	* .4205 *
	* 2.4254 *	* 2.5993 *	* 2.4868 *	* 2.6580 *	* 2.4624 *	* 2.7170 *	* 3.0747 *	* 4.5235 *
12	* .7261 *	* .7391 *	* .7044 *	* .7087 *	* .6394 *	* .6080 *	* .5223 *	
	* 2.5490 *	* 2.4394 *	* 2.6996 *	* 2.4624 *	* 2.5080 *	* 2.6560 *	* 3.4604 *	
13	* .7207 *	* .6979 *	* .6535 *	* .6567 *	* .6080 *	* .5603 *	* .4248 *	
	* 2.4804 *	* 2.6511 *	* 2.8942 *	* 2.7170 *	* 2.6560 *	* 2.8804 *	* 4.1373 *	
14	* .6372 *	* .6448 *	* .6361 *	* .5939 *	* .5223 *	* .4248 *		
	* 2.8744 *	* 2.7698 *	* 2.8725 *	* 3.0747 *	* 3.4604 *	* 4.1373 *		
15	* .4487 *	* .4779 *	* .4714 *	* .4205 *	F-SUB-Q			
	* 4.0488 *	* 3.8355 *	* 3.9167 *	* 4.5235 *	M-SUB-Q			

AT 100% POWER, 470 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8236 *	* 1.1617 *	* 1.2701 *	* 1.3037 *	* 1.3026 *	* 1.2874 *	* 1.1466 *	* .7423 *
	* 2.1848 *	* 1.6732 *	* 1.5065 *	* 1.4080 *	* 1.4478 *	* 1.4151 *	* 1.6274 *	* 2.4985 *
9	* 1.1617 *	* 1.2333 *	* 1.2820 *	* 1.3124 *	* 1.2961 *	* 1.2744 *	* 1.2278 *	* .8735 *
	* 1.6732 *	* 1.5793 *	* 1.4521 *	* 1.4469 *	* 1.4191 *	* 1.4788 *	* 1.4873 *	* 2.1400 *
10	* 1.2701 *	* 1.2820 *	* 1.3048 *	* 1.3004 *	* 1.2939 *	* 1.2213 *	* 1.2376 *	* .7835 *
	* 1.5065 *	* 1.4511 *	* 1.4784 *	* 1.4446 *	* 1.5032 *	* 1.5895 *	* 1.5041 *	* 2.4172 *
11	* 1.3037 *	* 1.3124 *	* 1.3015 *	* 1.2972 *	* 1.2560 *	* 1.2170 *	* 1.1520 *	* .7022 *
	* 1.4080 *	* 1.4459 *	* 1.4436 *	* 1.4768 *	* 1.4405 *	* 1.5242 *	* 1.6200 *	* 2.7593 *
12	* 1.3026 *	* 1.2961 *	* 1.2939 *	* 1.2560 *	* 1.2094 *	* 1.2029 *	* .8594 *	
	* 1.4478 *	* 1.4191 *	* 1.5041 *	* 1.4405 *	* 1.4122 *	* 1.4392 *	* 2.1654 *	
13	* 1.2874 *	* 1.2744 *	* 1.2213 *	* 1.2170 *	* 1.2040 *	* 1.1260 *	* .7120 *	
	* 1.4151 *	* 1.4790 *	* 1.5895 *	* 1.5242 *	* 1.4392 *	* 1.5269 *	* 2.5534 *	
14	* 1.1466 *	* 1.2267 *	* 1.2376 *	* 1.1520 *	* .8594 *	* .7120 *		
	* 1.6274 *	* 1.4873 *	* 1.5041 *	* 1.6200 *	* 2.1654 *	* 2.5534 *		
15	* .7423 *	* .8745 *	* .7835 *	* .7022 *	F-SUB-Q			
	* 2.4985 *	* 2.1400 *	* 2.4172 *	* 2.7593 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 50 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 470 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9396	* 1.2853	* 1.4131	* 1.5009	* 1.4478	* 1.4825	* 1.2809	* .8258
	* 2.0821	* 1.5466	* 1.3730	* 1.2357	* 1.3198	* 1.2424	* 1.4760	* 2.2738
9	* 1.2853	* 1.3698	* 1.4793	* 1.4619	* 1.4933	* 1.4186	* 1.4164	* .9883
	* 1.5466	* 1.4446	* 1.2730	* 1.3145	* 1.2440	* 1.3455	* 1.3005	* 1.9153
10	* 1.4131	* 1.4803	* 1.4565	* 1.4988	* 1.4413	* 1.3568	* 1.4337	* .8800
	* 1.3730	* 1.2722	* 1.3444	* 1.2667	* 1.3703	* 1.4506	* 1.3142	* 2.1811
11	* 1.5009	* 1.4630	* 1.4998	* 1.4522	* 1.4662	* 1.3730	* 1.3373	* .7922
	* 1.2357	* 1.3139	* 1.2659	* 1.3472	* 1.2657	* 1.3871	* 1.4145	* 2.4827
12	* 1.4478	* 1.4933	* 1.4402	* 1.4662	* 1.4424	* 1.4359	* .9677	*
	* 1.3198	* 1.2434	* 1.3703	* 1.2657	* 1.3064	* 1.2645	* 1.9711	*
13	* 1.4825	* 1.4186	* 1.3568	* 1.3730	* 1.4359	* 1.3470	* .8041	*
	* 1.2424	* 1.3457	* 1.4506	* 1.3871	* 1.2645	* 1.3371	* 2.3269	*
14	* 1.2809	* 1.4164	* 1.4337	* 1.3373	* .9677	* .8052	*	*
	* 1.4760	* 1.3005	* 1.3142	* 1.4145	* 1.9711	* 2.3255	*	*
15	* .8258	* .9894	* .8800	* .7922	* F-SUB-Q			
	* 2.2738	* 1.9153	* 2.1815	* 2.4827	* M-SUB-Q			

AT 100% POWER, 470 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9623	* 1.3178	* 1.4630	* 1.6060	* 1.5053	* 1.5811	* 1.3340	* .8572
	* 2.0821	* 1.5357	* 1.3406	* 1.1649	* 1.2829	* 1.1747	* 1.4308	* 2.2152
9	* 1.3178	* 1.4142	* 1.5822	* 1.5183	* 1.5985	* 1.4727	* 1.5193	* 1.0349
	* 1.5357	* 1.4152	* 1.2009	* 1.2801	* 1.1723	* 1.3100	* 1.2233	* 1.8496
10	* 1.4630	* 1.5833	* 1.5139	* 1.6050	* 1.4944	* 1.4001	* 1.5324	* .9201
	* 1.3406	* 1.1997	* 1.3088	* 1.1948	* 1.3380	* 1.4226	* 1.2404	* 2.1103
11	* 1.6060	* 1.5193	* 1.6050	* 1.5096	* 1.5833	* 1.4478	* 1.4348	* .8312
	* 1.1649	* 1.2795	* 1.1941	* 1.3182	* 1.1957	* 1.3477	* 1.3318	* 2.3927
12	* 1.5053	* 1.5995	* 1.4933	* 1.5833	* 1.5258	* 1.5584	* 1.0143	*
	* 1.2829	* 1.1718	* 1.3382	* 1.1957	* 1.2737	* 1.1967	* 1.9212	*
13	* 1.5811	* 1.4727	* 1.4001	* 1.4478	* 1.5584	* 1.4673	* .8464	*
	* 1.1747	* 1.3102	* 1.4226	* 1.3472	* 1.1967	* 1.2619	* 2.2651	*
14	* 1.3340	* 1.5193	* 1.5324	* 1.4348	* 1.0143	* .8475	*	*
	* 1.4308	* 1.2227	* 1.2404	* 1.3318	* 1.9212	* 2.2641	*	*
15	* .8572	* 1.0360	* .9201	* .8323	* F-SUB-Q			
	* 2.2152	* 1.8469	* 2.1123	* 2.3927	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 51 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 470 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9363	* 1.2842	* 1.4348	* 1.6006	* 1.4825	* 1.5735	* 1.3156	* .8431
	* 2.1965	* 1.6002	* 1.3841	* 1.1802	* 1.3185	* 1.1915	* 1.4687	* 2.2811
9	* 1.2842	* 1.3850	* 1.5768	* 1.4923	* 1.5941	* 1.4478	* 1.5193	* 1.0208
	* 1.6002	* 1.4639	* 1.2177	* 1.3179	* 1.1877	* 1.3486	* 1.2366	* 1.8974
10	* 1.4348	* 1.5779	* 1.4890	* 1.6006	* 1.4662	* 1.3720	* 1.5291	* .9071
	* 1.3841	* 1.2170	* 1.3473	* 1.2113	* 1.3807	* 1.4701	* 1.2540	* 2.1669
11	* 1.6006	* 1.4933	* 1.6006	* 1.4847	* 1.5855	* 1.4337	* 1.4359	* .8225
	* 1.1802	* 1.3179	* 1.2101	* 1.3644	* 1.2157	* 1.3881	* 1.3509	* 2.4474
12	* 1.4825	* 1.5941	* 1.4662	* 1.5855	* 1.5107	* 1.5659	* 1.0035	*
	* 1.3185	* 1.1872	* 1.3814	* 1.2157	* 1.3140	* 1.2150	* 1.9822	*
13	* 1.5735	* 1.4467	* 1.3720	* 1.4337	* 1.5659	* 1.4760	* .8377	*
	* 1.1915	* 1.3494	* 1.4701	* 1.3881	* 1.2150	* 1.2809	* 2.3406	*
14	* 1.3156	* 1.5204	* 1.5291	* 1.4359	* 1.0035	* .8388	*	*
	* 1.4687	* 1.2366	* 1.2538	* 1.3509	* 1.9822	* 2.3406	*	*
15	* .8431	* 1.0219	* .9071	* .8225	* F-SUB-Q			
	* 2.2811	* 1.8958	* 2.1669	* 2.4474	* M-SUB-Q			

AT 100% POWER, 470 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9016	* 1.2387	* 1.3893	* 1.5638	* 1.4402	* 1.5367	* 1.2798	* .8182
	* 2.2999	* 1.6741	* 1.4480	* 1.2225	* 1.3753	* 1.2341	* 1.5295	* 2.3808
9	* 1.2387	* 1.3395	* 1.5378	* 1.4467	* 1.5562	* 1.4045	* 1.4879	* .9927
	* 1.6741	* 1.5330	* 1.2620	* 1.3777	* 1.2302	* 1.4079	* 1.2780	* 1.9789
10	* 1.3893	* 1.5389	* 1.4446	* 1.5627	* 1.4207	* 1.3286	* 1.4955	* .8810
	* 1.4480	* 1.2607	* 1.4064	* 1.2544	* 1.4432	* 1.5370	* 1.2942	* 2.2584
11	* 1.5638	* 1.4478	* 1.5627	* 1.4392	* 1.5508	* 1.3969	* 1.4066	* .8019
	* 1.2225	* 1.3768	* 1.2537	* 1.4281	* 1.2637	* 1.4532	* 1.3957	* 2.5414
12	* 1.4402	* 1.5562	* 1.4196	* 1.5508	* 1.4706	* 1.5367	* .9775	*
	* 1.3753	* 1.2300	* 1.4441	* 1.2637	* 1.3780	* 1.2625	* 2.0759	*
13	* 1.5367	* 1.4045	* 1.3286	* 1.3969	* 1.5367	* 1.4500	* .8160	*
	* 1.2341	* 1.4086	* 1.5370	* 1.4529	* 1.2625	* 1.3314	* 2.4612	*
14	* 1.2798	* 1.4890	* 1.4955	* 1.4077	* .9775	* .8171	*	*
	* 1.5295	* 1.2780	* 1.2940	* 1.3957	* 2.0773	* 2.4600	*	*
15	* .8182	* .9938	* .8810	* .8019	* F-SUB-Q			
	* 2.3808	* 1.9757	* 2.2584	* 2.5414	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 52 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 470 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8789	* 1.2094	* 1.3600	* 1.5389	* 1.4131	* 1.5128	* 1.2582	* .8041
	* 2.3697	* 1.7160	* 1.5006	* 1.2592	* 1.4247	* 1.2708	* 1.5814	* 2.4628
9	* 1.2094	* 1.3102	* 1.5139	* 1.4186	* 1.5313	* 1.3774	* 1.4706	* .9753
	* 1.7160	* 1.5796	* 1.2979	* 1.4274	* 1.2671	* 1.4588	* 1.3117	* 2.0441
10	* 1.3600	* 1.5150	* 1.4153	* 1.5378	* 1.3915	* 1.3004	* 1.4760	* .8670
	* 1.5006	* 1.2971	* 1.4560	* 1.2899	* 1.4845	* 1.5851	* 1.3263	* 2.3281
11	* 1.5389	* 1.4186	* 1.5378	* 1.4099	* 1.5291	* 1.3741	* 1.3904	* .7889
	* 1.2592	* 1.4274	* 1.2891	* 1.4690	* 1.2957	* 1.4970	* 1.4228	* 2.5934
12	* 1.4131	* 1.5324	* 1.3904	* 1.5291	* 1.4457	* 1.5193	* .9623	*
	* 1.4247	* 1.2664	* 1.4853	* 1.2957	* 1.4203	* 1.2932	* 2.1375	*
13	* 1.5128	* 1.3774	* 1.3004	* 1.3741	* 1.5193	* 1.4337	* .8041	*
	* 1.2708	* 1.4590	* 1.5851	* 1.4970	* 1.2927	* 1.3654	* 2.5399	*
14	* 1.2582	* 1.4706	* 1.4760	* 1.3904	* .9623	* .8041	*	*
	* 1.5814	* 1.3111	* 1.3263	* 1.4219	* 2.1375	* 2.5371	*	*
15	* .8041	* .9764	* .8670	* .7900	F-SUB-Q			
	* 2.4628	* 2.0408	* 2.3281	* 2.5934	M-SUB-Q			

AT 100% POWER, 470 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8518	* 1.1736	* 1.3254	* 1.5096	* 1.3785	* 1.4858	* 1.2289	* .7824
	* 2.4662	* 1.7892	* 1.5659	* 1.3120	* 1.4877	* 1.3230	* 1.6505	* 2.5811
9	* 1.1736	* 1.2755	* 1.4858	* 1.3828	* 1.5031	* 1.3438	* 1.4467	* .9515
	* 1.7892	* 1.6418	* 1.3479	* 1.4906	* 1.3189	* 1.5228	* 1.3616	* 2.1329
10	* 1.3254	* 1.4868	* 1.3806	* 1.5085	* 1.3546	* 1.2668	* 1.4522	* .8475
	* 1.5659	* 1.3471	* 1.5129	* 1.3353	* 1.5430	* 1.6456	* 1.3706	* 2.4220
11	* 1.5096	* 1.3839	* 1.5085	* 1.3741	* 1.5020	* 1.3438	* 1.3687	* .7705
	* 1.3120	* 1.4904	* 1.3344	* 1.5223	* 1.3361	* 1.5465	* 1.4610	* 2.6888
12	* 1.3785	* 1.5031	* 1.3546	* 1.5020	* 1.4131	* 1.4955	* .9396	*
	* 1.4877	* 1.3189	* 1.5430	* 1.3361	* 1.4706	* 1.3368	* 2.2100	*
13	* 1.4858	* 1.3427	* 1.2668	* 1.3438	* 1.4955	* 1.4121	* .7846	*
	* 1.3230	* 1.5238	* 1.6456	* 1.5465	* 1.3368	* 1.4154	* 2.6432	*
14	* 1.2289	* 1.4467	* 1.4522	* 1.3687	* .9396	* .7846	*	*
	* 1.6505	* 1.3614	* 1.3706	* 1.4610	* 2.2122	* 2.6409	*	*
15	* .7824	* .9526	* .8475	* .7705	F-SUB-Q			
	* 2.5811	* 2.1309	* 2.4220	* 2.6864	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 53 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 470 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8366	* 1.1531	* 1.3059	* 1.4933	* 1.3600	* 1.4706	* 1.2137	* .7716
	* 2.5674	* 1.8529	* 1.6225	* 1.3686	* 1.5434	* 1.3806	* 1.7135	* 2.6781
9	* 1.1531	* 1.2560	* 1.4695	* 1.3633	* 1.4868	* 1.3254	* 1.4348	* .9396
	* 1.8529	* 1.6948	* 1.4004	* 1.5472	* 1.3753	* 1.5810	* 1.4151	* 2.2101
10	* 1.3059	* 1.4706	* 1.3611	* 1.4912	* 1.3351	* 1.2484	* 1.4392	* .8377
	* 1.6225	* 1.3996	* 1.5633	* 1.3858	* 1.5932	* 1.7033	* 1.4180	* 2.4959
11	* 1.4933	* 1.3644	* 1.4912	* 1.3535	* 1.4858	* 1.3275	* 1.3568	* .7608
	* 1.3686	* 1.5464	* 1.3849	* 1.5758	* 1.3865	* 1.5928	* 1.5142	* 2.7650
12	* 1.3600	* 1.4868	* 1.3340	* 1.4858	* 1.3947	* 1.4825	* .9276	*
	* 1.5434	* 1.3753	* 1.5939	* 1.3865	* 1.5158	* 1.3819	* 2.2772	*
13	* 1.4706	* 1.3243	* 1.2484	* 1.3286	* 1.4825	* 1.4001	* .7748	*
	* 1.3806	* 1.5810	* 1.7028	* 1.5928	* 1.3819	* 1.4617	* 2.7177	*
14	* 1.2137	* 1.4348	* 1.4392	* 1.3568	* .9276	* .7748	*	*
	* 1.7135	* 1.4151	* 1.4180	* 1.5142	* 2.2772	* 2.7145	*	*
15	* .7716	* .9407	* .8377	* .7608	* F-SUB-Q			
	* 2.6781	* 2.2063	* 2.4959	* 2.7650	* M-SUB-Q			

AT 100% POWER, 470 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8139	* 1.1249	* 1.2766	* 1.4597	* 1.3319	* 1.4370	* 1.1877	* .7553
	* 2.6292	* 1.8924	* 1.6640	* 1.4209	* 1.5898	* 1.4416	* 1.7831	* 2.8076
9	* 1.1249	* 1.2257	* 1.4359	* 1.3330	* 1.4522	* 1.2961	* 1.4045	* .9190
	* 1.8924	* 1.7337	* 1.4472	* 1.5898	* 1.4280	* 1.6346	* 1.4792	* 2.3117
10	* 1.2766	* 1.4370	* 1.3308	* 1.4565	* 1.3037	* 1.2192	* 1.4077	* .8193
	* 1.6640	* 1.4462	* 1.5985	* 1.4307	* 1.6323	* 1.7521	* 1.4773	* 2.5967
11	* 1.4597	* 1.3340	* 1.4565	* 1.3232	* 1.4522	* 1.3004	* 1.3264	* .7445
	* 1.4209	* 1.5898	* 1.4298	* 1.6130	* 1.4499	* 1.6545	* 1.5779	* 2.8667
12	* 1.3319	* 1.4532	* 1.3037	* 1.4522	* 1.3655	* 1.4511	* .9092	*
	* 1.5898	* 1.4280	* 1.6335	* 1.4499	* 1.5843	* 1.4555	* 2.3660	*
13	* 1.4370	* 1.2961	* 1.2192	* 1.3004	* 1.4511	* 1.3698	* .7575	*
	* 1.4416	* 1.6358	* 1.7521	* 1.6533	* 1.4555	* 1.5457	* 2.8526	*
14	* 1.1877	* 1.4045	* 1.4077	* 1.3275	* .9092	* .7575	*	*
	* 1.7831	* 1.4792	* 1.4773	* 1.5779	* 2.3660	* 2.8491	*	*
15	* .7553	* .9201	* .8193	* .7445	* F-SUB-Q			
	* 2.8076	* 2.3071	* 2.5967	* 2.8667	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 54 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 470 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8106	* 1.1205	* 1.2733	* 1.4684	* 1.3308	* 1.4467	* 1.1877	* .7543
	* 2.6132	* 1.8859	* 1.6567	* 1.4193	* 1.5846	* 1.4406	* 1.7740	* 2.7916
9	* 1.1205	* 1.2224	* 1.4446	* 1.3308	* 1.4619	* 1.2939	* 1.4175	* .9179
	* 1.8859	* 1.7267	* 1.4452	* 1.5857	* 1.4272	* 1.6301	* 1.4748	* 2.2965
10	* 1.2733	* 1.4457	* 1.3275	* 1.4652	* 1.3004	* 1.2148	* 1.4196	* .8204
	* 1.6567	* 1.4433	* 1.5955	* 1.4317	* 1.6323	* 1.7513	* 1.4767	* 2.5785
11	* 1.4684	* 1.3319	* 1.4652	* 1.3199	* 1.4608	* 1.3004	* 1.3384	* .7434
	* 1.4193	* 1.5846	* 1.4299	* 1.6143	* 1.4561	* 1.6579	* 1.5789	* 2.8566
12	* 1.3308	* 1.4619	* 1.2994	* 1.4608	* 1.3665	* 1.4619	* .9081	
	* 1.5846	* 1.4272	* 1.6335	* 1.4570	* 1.5890	* 1.4617	* 2.3713	
13	* 1.4467	* 1.2939	* 1.2148	* 1.3015	* 1.4619	* 1.3817	* .7575	
	* 1.4406	* 1.6312	* 1.7513	* 1.6567	* 1.4617	* 1.5533	* 2.8566	
14	* 1.1877	* 1.4175	* 1.4196	* 1.3384	* .9081	* .7575		
	* 1.7740	* 1.4748	* 1.4767	* 1.5789	* 2.3713	* 2.8566		
15	* .7543	* .9201	* .8204	* .7445	F-SUB-Q			
	* 2.7916	* 2.2943	* 2.5785	* 2.8566	M-SUB-Q			

AT 100% POWER, 470 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8030	* 1.1108	* 1.2647	* 1.4652	* 1.3232	* 1.4424	* 1.1812	* .7488
	* 2.6209	* 1.8902	* 1.6589	* 1.4282	* 1.5871	* 1.4495	* 1.7744	* 2.7925
9	* 1.1108	* 1.2148	* 1.4413	* 1.3221	* 1.4576	* 1.2864	* 1.4153	* .9136
	* 1.8902	* 1.7299	* 1.4549	* 1.5892	* 1.4370	* 1.6324	* 1.4835	* 2.2975
10	* 1.2647	* 1.4424	* 1.3199	* 1.4608	* 1.2907	* 1.2062	* 1.4164	* .8171
	* 1.6589	* 1.4540	* 1.6001	* 1.4432	* 1.6404	* 1.7597	* 1.4873	* 2.5805
11	* 1.4652	* 1.3232	* 1.4608	* 1.3102	* 1.4565	* 1.2939	* 1.3351	* .7402
	* 1.4282	* 1.5882	* 1.4423	* 1.6233	* 1.4732	* 1.6648	* 1.5927	* 2.8606
12	* 1.3232	* 1.4576	* 1.2907	* 1.4565	* 1.3579	* 1.4597	* .9038	
	* 1.5871	* 1.4370	* 1.6404	* 1.4732	* 1.5968	* 1.4779	* 2.3814	
13	* 1.4424	* 1.2864	* 1.2062	* 1.2939	* 1.4597	* 1.3785	* .7532	
	* 1.4495	* 1.6335	* 1.7597	* 1.6648	* 1.4779	* 1.5703	* 2.8711	
14	* 1.1812	* 1.4153	* 1.4164	* 1.3351	* .9038	* .7532		
	* 1.7744	* 1.4835	* 1.4873	* 1.5927	* 2.3814	* 2.8711		
15	* .7488	* .9146	* .8171	* .7402	F-SUB-Q			
	* 2.7925	* 2.2952	* 2.5805	* 2.8606	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 55 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 470 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7933	* 1.1000	* 1.2528	* 1.4511	* 1.3102	* 1.4294	* 1.1715	* .7423
	* 2.6439	* 1.9038	* 1.6700	* 1.4427	* 1.5964	* 1.4633	* 1.7799	* 2.8046
9	* 1.1000	* 1.2029	* 1.4272	* 1.3102	* 1.4435	* 1.2744	* 1.4034	* .9049
	* 1.9038	* 1.7417	* 1.4707	* 1.5996	* 1.4525	* 1.6420	* 1.4969	* 2.3069
10	* 1.2528	* 1.4283	* 1.3069	* 1.4457	* 1.2777	* 1.1932	* 1.4045	* .8095
	* 1.6700	* 1.4688	* 1.6106	* 1.4588	* 1.6524	* 1.7719	* 1.5007	* 2.5915
11	* 1.4511	* 1.3102	* 1.4467	* 1.2972	* 1.4424	* 1.2831	* 1.3232	* .7326
	* 1.4427	* 1.5985	* 1.4579	* 1.6363	* 1.4931	* 1.6784	* 1.6095	* 2.8766
12	* 1.3102	* 1.4435	* 1.2766	* 1.4424	* 1.3449	* 1.4467	* .8962	*
	* 1.5964	* 1.4516	* 1.6536	* 1.4931	* 1.6117	* 1.4978	* 2.3962	*
13	* 1.4294	* 1.2733	* 1.1932	* 1.2831	* 1.4467	* 1.3665	* .7456	*
	* 1.4633	* 1.6432	* 1.7719	* 1.6772	* 1.4978	* 1.5910	* 2.8943	*
14	* 1.1715	* 1.4034	* 1.4045	* 1.3232	* .8962	* .7467	*	*
	* 1.7799	* 1.4959	* 1.5007	* 1.6095	* 2.3962	* 2.8943	*	*
15	* .7423	* .9060	* .8095	* .7337	* F-SUB-Q			
	* 2.8046	* 2.3047	* 2.5915	* 2.8766	* M-SUB-Q			

AT 100% POWER, 470 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8009	* 1.1108	* 1.2668	* 1.4738	* 1.3264	* 1.4511	* 1.1877	* .7521
	* 2.6321	* 1.8930	* 1.6594	* 1.4270	* 1.5835	* 1.4463	* 1.7639	* 2.7748
9	* 1.1108	* 1.2159	* 1.4500	* 1.3254	* 1.4652	* 1.2896	* 1.4294	* .9179
	* 1.8930	* 1.7302	* 1.4543	* 1.5878	* 1.4357	* 1.6295	* 1.4725	* 2.2801
10	* 1.2668	* 1.4511	* 1.3221	* 1.4684	* 1.2918	* 1.2062	* 1.4294	* .8225
	* 1.6594	* 1.4525	* 1.5985	* 1.4418	* 1.6409	* 1.7547	* 1.4771	* 2.5577
11	* 1.4738	* 1.3254	* 1.4684	* 1.3113	* 1.4641	* 1.2994	* 1.3470	* .7445
	* 1.4270	* 1.5867	* 1.4409	* 1.6239	* 1.4753	* 1.6606	* 1.5824	* 2.8384
12	* 1.3264	* 1.4662	* 1.2907	* 1.4641	* 1.3622	* 1.4706	* .9092	*
	* 1.5835	* 1.4357	* 1.6409	* 1.4753	* 1.5975	* 1.4771	* 2.3673	*
13	* 1.4511	* 1.2885	* 1.2062	* 1.2994	* 1.4706	* 1.3904	* .7564	*
	* 1.4463	* 1.6295	* 1.7547	* 1.6606	* 1.4771	* 1.5677	* 2.8591	*
14	* 1.1877	* 1.4294	* 1.4294	* 1.3470	* .9081	* .7575	*	*
	* 1.7639	* 1.4725	* 1.4771	* 1.5824	* 2.3673	* 2.8556	*	*
15	* .7521	* .9201	* .8225	* .7445	* F-SUB-Q			
	* 2.7748	* 2.2757	* 2.5577	* 2.8384	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 56 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 470 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8030	* 1.1162	* 1.2744	* 1.4890	* 1.3351	* 1.4662	* 1.1953	* .7564
	* 2.5852	* 1.8623	* 1.6368	* 1.4057	* 1.5650	* 1.4253	* 1.7371	* 2.7216
9	* 1.1162	* 1.2235	* 1.4652	* 1.3330	* 1.4803	* 1.2972	* 1.4467	* .9244
	* 1.8623	* 1.7040	* 1.4308	* 1.5688	* 1.4150	* 1.6088	* 1.4463	* 2.2369
10	* 1.2744	* 1.4662	* 1.3297	* 1.4825	* 1.2983	* 1.2116	* 1.4457	* .8290
	* 1.6368	* 1.4296	* 1.5783	* 1.4207	* 1.6210	* 1.7307	* 1.4517	* 2.5043
11	* 1.4890	* 1.3340	* 1.4836	* 1.3178	* 1.4793	* 1.3080	* 1.3633	* .7488
	* 1.4057	* 1.5681	* 1.4198	* 1.6044	* 1.4546	* 1.6387	* 1.5519	* 2.7794
12	* 1.3351	* 1.4814	* 1.2972	* 1.4793	* 1.3709	* 1.4868	* .9146	*
	* 1.5650	* 1.4147	* 1.6218	* 1.4546	* 1.5807	* 1.4546	* 2.3261	*
13	* 1.4662	* 1.2961	* 1.2127	* 1.3091	* 1.4868	* 1.4066	* .7618	*
	* 1.4253	* 1.6099	* 1.7303	* 1.6387	* 1.4540	* 1.5413	* 2.8004	*
14	* 1.1953	* 1.4467	* 1.4457	* 1.3633	* .9146	* .7629	*	*
	* 1.7371	* 1.4463	* 1.4517	* 1.5519	* 2.3268	* 2.8004	*	*
15	* .7564	* .9266	* .8290	* .7488	* F-SUB-Q			
	* 2.7216	* 2.2327	* 2.5043	* 2.7794	* M-SUB-Q			

AT 100% POWER, 470 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8074	* 1.1238	* 1.2842	* 1.5042	* 1.3460	* 1.4814	* 1.2062	* .7618
	* 2.5376	* 1.8262	* 1.6035	* 1.3730	* 1.5318	* 1.3906	* 1.6975	* 2.6618
9	* 1.1238	* 1.2333	* 1.4803	* 1.3438	* 1.4955	* 1.3080	* 1.4630	* .9331
	* 1.8262	* 1.6699	* 1.3978	* 1.5365	* 1.3819	* 1.5738	* 1.4084	* 2.1829
10	* 1.2842	* 1.4814	* 1.3405	* 1.4977	* 1.3069	* 1.2202	* 1.4619	* .8355
	* 1.6035	* 1.3964	* 1.5445	* 1.3876	* 1.5869	* 1.6910	* 1.4129	* 2.4444
11	* 1.5042	* 1.3438	* 1.4977	* 1.3275	* 1.4933	* 1.3199	* 1.3785	* .7553
	* 1.3730	* 1.5355	* 1.3865	* 1.5707	* 1.4180	* 1.5980	* 1.5098	* 2.7129
12	* 1.3460	* 1.4955	* 1.3069	* 1.4933	* 1.3817	* 1.5031	* .9222	*
	* 1.5318	* 1.3814	* 1.5880	* 1.4180	* 1.5425	* 1.4143	* 2.2670	*
13	* 1.4814	* 1.3069	* 1.2213	* 1.3199	* 1.5031	* 1.4229	* .7683	*
	* 1.3906	* 1.5745	* 1.6902	* 1.5980	* 1.4143	* 1.4970	* 2.7286	*
14	* 1.2062	* 1.4630	* 1.4619	* 1.3785	* .9222	* .7683	*	*
	* 1.6975	* 1.4078	* 1.4129	* 1.5098	* 2.2670	* 2.7265	*	*
15	* .7618	* .9341	* .8355	* .7553	* F-SUB-Q			
	* 2.6618	* 2.1789	* 2.4444	* 2.7129	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 57 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 470 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8139	* 1.1346	* 1.2983	* 1.5183	* 1.3611	* 1.4944	* 1.2202	* .7705
	* 2.5077	* 1.8016	* 1.5810	* 1.3550	* 1.5084	* 1.3710	* 1.6671	* 2.6133
9	* 1.1346	* 1.2463	* 1.4933	* 1.3579	* 1.5085	* 1.3210	* 1.4760	* .9428
	* 1.8016	* 1.6462	* 1.3797	* 1.5136	* 1.3631	* 1.5487	* 1.3856	* 2.1418
10	* 1.2983	* 1.4944	* 1.3546	* 1.5107	* 1.3210	* 1.2333	* 1.4760	* .8442
	* 1.5810	* 1.3780	* 1.5221	* 1.3687	* 1.5628	* 1.6620	* 1.3885	* 2.3986
11	* 1.5183	* 1.3579	* 1.5118	* 1.3416	* 1.5063	* 1.3340	* 1.3904	* .7629
	* 1.3550	* 1.5132	* 1.3676	* 1.5457	* 1.3943	* 1.5669	* 1.4830	* 2.6616
12	* 1.3611	* 1.5096	* 1.3199	* 1.5063	* 1.3969	* 1.5172	* .9331	*
	* 1.5084	* 1.3626	* 1.5631	* 1.3946	* 1.5132	* 1.3869	* 2.2192	*
13	* 1.4944	* 1.3210	* 1.2333	* 1.3340	* 1.5172	* 1.4348	* .7759	*
	* 1.3710	* 1.5497	* 1.6609	* 1.5666	* 1.3864	* 1.4661	* 2.6716	*
14	* 1.2202	* 1.4760	* 1.4760	* 1.3904	* .9331	* .7759	*	*
	* 1.6671	* 1.3850	* 1.3885	* 1.4830	* 2.2206	* 2.6696	*	*
15	* .7705	* .9450	* .8442	* .7629	* F-SUB-Q			
	* 2.6133	* 2.1392	* 2.3986	* 2.6616	* M-SUB-Q			

AT 100% POWER, 470 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8366	* 1.1661	* 1.3362	* 1.5746	* 1.4023	* 1.5508	* 1.2571	* .7933
	* 2.4424	* 1.7552	* 1.5371	* 1.3073	* 1.4654	* 1.3237	* 1.6187	* 2.5389
9	* 1.1661	* 1.2831	* 1.5486	* 1.3991	* 1.5649	* 1.3622	* 1.5345	* .9721
	* 1.7552	* 1.6012	* 1.3309	* 1.4707	* 1.3153	* 1.5050	* 1.3324	* 2.0751
10	* 1.3362	* 1.5508	* 1.3958	* 1.5670	* 1.3600	* 1.2701	* 1.5324	* .8724
	* 1.5371	* 1.3296	* 1.4777	* 1.3198	* 1.5178	* 1.6125	* 1.3356	* 2.3197
11	* 1.5746	* 1.4001	* 1.5681	* 1.3817	* 1.5627	* 1.3763	* 1.4446	* .7868
	* 1.3073	* 1.4698	* 1.3189	* 1.4994	* 1.3400	* 1.5133	* 1.4234	* 2.5750
12	* 1.4023	* 1.5659	* 1.3590	* 1.5627	* 1.4413	* 1.5746	* .9612	*
	* 1.4654	* 1.3150	* 1.5187	* 1.3400	* 1.4583	* 1.3289	* 2.1437	*
13	* 1.5508	* 1.3611	* 1.2712	* 1.3763	* 1.5746	* 1.4901	* .7998	*
	* 1.3237	* 1.5060	* 1.6117	* 1.5133	* 1.3289	* 1.4022	* 2.5750	*
14	* 1.2571	* 1.5345	* 1.5324	* 1.4446	* .9612	* .7998	*	*
	* 1.6187	* 1.3324	* 1.3356	* 1.4234	* 2.1457	* 2.5731	*	*
15	* .7933	* .9742	* .8724	* .7868	* F-SUB-Q			
	* 2.5389	* 2.0714	* 2.3182	* 2.5750	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 58 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 470 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8572	* 1.1964	* 1.3730	* 1.6212	* 1.4424	* 1.5963	* 1.2918	* .8139
	* 2.3446	* 1.6856	* 1.4746	* 1.2508	* 1.4045	* 1.2669	* 1.5566	* 2.4507
9	* 1.1964	* 1.3167	* 1.5941	* 1.4381	* 1.6115	* 1.4001	* 1.5800	* .9981
	* 1.6856	* 1.5360	* 1.2733	* 1.4093	* 1.2583	* 1.4437	* 1.2772	* 2.0013
10	* 1.3730	* 1.5963	* 1.4348	* 1.6136	* 1.3969	* 1.3048	* 1.5779	* .8962
	* 1.4746	* 1.2719	* 1.4158	* 1.2619	* 1.4536	* 1.5475	* 1.2802	* 2.2343
11	* 1.6212	* 1.4392	* 1.6136	* 1.4196	* 1.6093	* 1.4153	* 1.4858	* .8063
	* 1.2508	* 1.4085	* 1.2606	* 1.4349	* 1.2742	* 1.4449	* 1.3641	* 2.4848
12	* 1.4424	* 1.6125	* 1.3958	* 1.6093	* 1.4825	* 1.6212	* .9883	*
	* 1.4045	* 1.2578	* 1.4545	* 1.2742	* 1.3850	* 1.2652	* 2.0546	*
13	* 1.5963	* 1.3991	* 1.3059	* 1.4153	* 1.6212	* 1.5345	* .8214	*
	* 1.2669	* 1.4446	* 1.5475	* 1.4446	* 1.2652	* 1.3372	* 2.4720	*
14	* 1.2918	* 1.5800	* 1.5779	* 1.4858	* .9883	* .8214	*	*
	* 1.5566	* 1.2772	* 1.2802	* 1.3641	* 2.0551	* 2.4694	*	*
15	* .8139	* 1.0003	* .8962	* .8063	* F-SUB-Q			
	* 2.4507	* 1.9991	* 2.2343	* 2.4848	* M-SUB-Q			

AT 100% POWER, 470 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8691	* 1.2181	* 1.3980	* 1.6461	* 1.4706	* 1.6223	* 1.3167	* .8258
	* 2.2851	* 1.6361	* 1.4314	* 1.2172	* 1.3615	* 1.2313	* 1.5077	* 2.3831
9	* 1.2181	* 1.3405	* 1.6169	* 1.4652	* 1.6364	* 1.4283	* 1.5995	* 1.0133
	* 1.6361	* 1.4913	* 1.2408	* 1.3670	* 1.2239	* 1.3976	* 1.2440	* 1.9438
10	* 1.3980	* 1.6180	* 1.4619	* 1.6386	* 1.4251	* 1.3297	* 1.6017	* .9092
	* 1.4314	* 1.2395	* 1.3734	* 1.2277	* 1.4078	* 1.4986	* 1.2435	* 2.1705
11	* 1.6461	* 1.4662	* 1.6386	* 1.4478	* 1.6342	* 1.4435	* 1.5042	* .8171
	* 1.2172	* 1.3668	* 1.2265	* 1.3891	* 1.2344	* 1.3937	* 1.3269	* 2.4162
12	* 1.4706	* 1.6375	* 1.4240	* 1.6342	* 1.5118	* 1.6461	* 1.0057	*
	* 1.3615	* 1.2239	* 1.4088	* 1.2344	* 1.3343	* 1.2236	* 1.9873	*
13	* 1.6223	* 1.4272	* 1.3308	* 1.4435	* 1.6461	* 1.5551	* .8334	*
	* 1.2313	* 1.3985	* 1.4986	* 1.3937	* 1.2236	* 1.2946	* 2.3911	*
14	* 1.3167	* 1.5995	* 1.6017	* 1.5042	* 1.0057	* .8334	*	*
	* 1.5077	* 1.2440	* 1.2435	* 1.3269	* 1.9873	* 2.3911	*	*
15	* .8258	* 1.0154	* .9092	* .8182	* F-SUB-Q			
	* 2.3831	* 1.9406	* 2.1705	* 2.4137	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 59 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 470 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8908	* 1.2517	* 1.4359	* 1.6927	* 1.5150	* 1.6700	* 1.3546	* .8453
	* 2.2096	* 1.5782	* 1.3815	* 1.1729	* 1.3097	* 1.1843	* 1.4511	* 2.3022
9	* 1.2517	* 1.3763	* 1.6581	* 1.5074	* 1.6830	* 1.4717	* 1.6429	* 1.0371
	* 1.5782	* 1.4392	* 1.1982	* 1.3172	* 1.1793	* 1.3430	* 1.1980	* 1.8801
10	* 1.4359	* 1.6602	* 1.5031	* 1.6830	* 1.4652	* 1.3687	* 1.6472	* .9331
	* 1.3815	* 1.1974	* 1.3234	* 1.1832	* 1.3551	* 1.4403	* 1.1948	* 2.0923
11	* 1.6927	* 1.5085	* 1.6830	* 1.4879	* 1.6819	* 1.4879	* 1.5432	* .8355
	* 1.1729	* 1.3165	* 1.1826	* 1.3374	* 1.1840	* 1.3343	* 1.2773	* 2.3360
12	* 1.5150	* 1.6841	* 1.4641	* 1.6819	* 1.5594	* 1.6949	* 1.0328	*
	* 1.3097	* 1.1788	* 1.3559	* 1.1846	* 1.2771	* 1.1725	* 1.9089	*
13	* 1.6700	* 1.4706	* 1.3687	* 1.4879	* 1.6949	* 1.5985	* .8550	*
	* 1.1843	* 1.3437	* 1.4403	* 1.3341	* 1.1725	* 1.2413	* 2.2993	*
14	* 1.3546	* 1.6429	* 1.6472	* 1.5432	* 1.0328	* .8550	*	*
	* 1.4511	* 1.1976	* 1.1948	* 1.2768	* 1.9089	* 2.2977	*	*
15	* .8453	* 1.0382	* .9331	* .8355	* F-SUB-Q			
	* 2.3022	* 1.8771	* 2.0923	* 2.3353	* M-SUB-Q			

AT 100% POWER, 470 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8713	* 1.2278	* 1.4077	* 1.6429	* 1.4944	* 1.6277	* 1.3330	* .8247
	* 2.2415	* 1.5964	* 1.3970	* 1.1982	* 1.3166	* 1.2040	* 1.4597	* 2.3382
9	* 1.2278	* 1.3492	* 1.6050	* 1.4814	* 1.6342	* 1.4511	* 1.5887	* 1.0057
	* 1.5964	* 1.4559	* 1.2270	* 1.3296	* 1.2042	* 1.3502	* 1.2266	* 1.9197
10	* 1.4077	* 1.6071	* 1.4738	* 1.6299	* 1.4392	* 1.3449	* 1.5995	* .9060
	* 1.3970	* 1.2260	* 1.3376	* 1.2105	* 1.3671	* 1.4526	* 1.2180	* 2.1310
11	* 1.6429	* 1.4814	* 1.6299	* 1.4597	* 1.6342	* 1.4673	* 1.4912	* .8095
	* 1.1982	* 1.3289	* 1.2104	* 1.3515	* 1.2064	* 1.3381	* 1.3080	* 2.3848
12	* 1.4944	* 1.6342	* 1.4392	* 1.6342	* 1.5378	* 1.6440	* 1.0122	*
	* 1.3166	* 1.2036	* 1.3679	* 1.2064	* 1.2809	* 1.1943	* 1.9267	*
13	* 1.6277	* 1.4500	* 1.3460	* 1.4673	* 1.6440	* 1.5497	* .8344	*
	* 1.2040	* 1.3504	* 1.4523	* 1.3381	* 1.1941	* 1.2647	* 2.3283	*
14	* 1.3330	* 1.5887	* 1.5995	* 1.4912	* 1.0122	* .8344	*	*
	* 1.4597	* 1.2266	* 1.2180	* 1.3080	* 1.9267	* 2.3283	*	*
15	* .8247	* 1.0068	* .9060	* .8095	* F-SUB-Q			
	* 2.3382	* 1.9166	* 2.1310	* 2.3848	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 60 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 470 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7846	* 1.0436	* 1.1964	* 1.4576	* 1.3297	* 1.4370	* 1.1834	* .7326
	* 2.4680	* 1.8628	* 1.6306	* 1.3391	* 1.4667	* 1.3517	* 1.6309	* 2.6105
9	* 1.0436	* 1.1541	* 1.4218	* 1.2625	* 1.4511	* 1.2658	* 1.3926	* .8615
	* 1.8628	* 1.6899	* 1.3733	* 1.5463	* 1.3443	* 1.5343	* 1.3861	* 2.2212
10	* 1.1964	* 1.4240	* 1.2614	* 1.4435	* 1.2257	* 1.1444	* 1.3763	* .7889
	* 1.6306	* 1.3723	* 1.5494	* 1.3551	* 1.5916	* 1.6965	* 1.4018	* 2.4270
11	* 1.4576	* 1.2625	* 1.4435	* 1.2398	* 1.4511	* 1.3059	* 1.2994	* .7109
	* 1.3391	* 1.5453	* 1.3543	* 1.5755	* 1.3456	* 1.4884	* 1.4844	* 2.6907
12	* 1.3297	* 1.4522	* 1.2246	* 1.4500	* 1.3665	* 1.4478	* .9006	*
	* 1.4667	* 1.3436	* 1.5926	* 1.3456	* 1.4268	* 1.3422	* 2.1441	*
13	* 1.4370	* 1.2647	* 1.1444	* 1.3069	* 1.4478	* 1.3340	* .7380	*
	* 1.3517	* 1.5353	* 1.6965	* 1.4884	* 1.3417	* 1.4534	* 2.6047	*
14	* 1.1834	* 1.3926	* 1.3763	* 1.2994	* .9006	* .7380	*	*
	* 1.6309	* 1.3858	* 1.4018	* 1.4844	* 2.1441	* 2.6047	*	*
15	* .7326	* .8626	* .7889	* .7109	* F-SUB-Q			
	* 2.6105	* 2.2191	* 2.4270	* 2.6898	* M-SUB-Q			

AT 100% POWER, 470 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6015	* .5581	* .6350	* .7239	* .6838	* .7131	* .6134	* .4118
	* 3.1925	* 3.4497	* 3.0424	* 2.6701	* 2.8225	* 2.6976	* 3.1176	* 4.6089
9	* .5581	* .6231	* .7044	* .6611	* .7207	* .6578	* .6502	* .4476
	* 3.4497	* 3.1005	* 2.7439	* 2.9241	* 2.6789	* 2.9248	* 2.9383	* 4.2373
10	* .6350	* .7055	* .6567	* .7163	* .6459	* .5960	* .6405	* .4443
	* 3.0424	* 2.7429	* 2.9494	* 2.7023	* 2.9925	* 3.2305	* 2.9822	* 4.2704
11	* .7239	* .6611	* .7163	* .6546	* .7196	* .6621	* .6047	* .3934
	* 2.6701	* 2.9241	* 2.7014	* 2.9512	* 2.6866	* 2.9074	* 3.1598	* 4.8134
12	* .6838	* .7207	* .6459	* .7196	* .6914	* .6762	* .5148	*
	* 2.8225	* 2.6789	* 2.9925	* 2.6866	* 2.7923	* 2.8405	* 3.7164	*
13	* .7131	* .6578	* .5960	* .6621	* .6773	* .6231	* .4172	*
	* 2.6976	* 2.9248	* 3.2305	* 2.9074	* 2.8405	* 3.0785	* 4.5678	*
14	* .6134	* .6502	* .6405	* .6047	* .5148	* .4172	*	*
	* 3.1176	* 2.9383	* 2.9822	* 3.1598	* 3.7164	* 4.5678	*	*
15	* .4118	* .4476	* .4443	* .3934	* F-SUB-Q			
	* 4.6089	* 4.2351	* 4.2704	* 4.8134	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 61 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .4963 *	* .4389 *	* .4508 *	* .4725 *	* .4497 *	* .4660 *	* .4161 *	* .2763 *
	* 3.0203 *	* 3.8856 *	* 3.8859 *	* 3.5980 *	* 3.8799 *	* 3.6294 *	* 4.1804 *	* 6.2363 *
9	* .4389 *	* .4573 *	* .4768 *	* .4497 *	* .4703 *	* .4487 *	* .4172 *	* .2893 *
	* 3.8856 *	* 3.8407 *	* 3.5805 *	* 3.8911 *	* 3.6063 *	* 3.8902 *	* 4.0400 *	* 5.9600 *
10	* .4508 *	* .4768 *	* .4497 *	* .4541 *	* .4356 *	* .4216 *	* .4042 *	* .2796 *
	* 3.8859 *	* 3.5805 *	* 3.9068 *	* 3.7331 *	* 4.0116 *	* 4.1455 *	* 4.1761 *	* 6.1572 *
11	* .4725 *	* .4497 *	* .4552 *	* .4172 *	* .4031 *	* .3901 *	* .3511 *	* .2330 *
	* 3.5980 *	* 3.8911 *	* 3.7331 *	* 4.1995 *	* 4.1222 *	* 4.4772 *	* 4.7782 *	* 7.3615 *
12	* .4497 *	* .4703 *	* .4356 *	* .4031 *	* .3219 *	* .3024 *	* .2807 *	
	* 3.8799 *	* 3.6063 *	* 4.0116 *	* 4.1188 *	* 4.3924 *	* 4.5010 *	* 5.8172 *	
13	* .4660 *	* .4487 *	* .4226 *	* .3901 *	* .3024 *	* .2525 *	* .1918 *	
	* 3.6294 *	* 3.8902 *	* 4.1455 *	* 4.4772 *	* 4.5010 *	* 5.0862 *	* 7.7060 *	
14	* .4161 *	* .4172 *	* .4042 *	* .3511 *	* .2807 *	* .1918 *		
	* 4.1804 *	* 4.0400 *	* 4.1750 *	* 4.7782 *	* 5.8172 *	* 7.7060 *		
15	* .2763 *	* .2893 *	* .2796 *	* .2330 *	F-SUB-Q			
	* 6.2363 *	* 5.9499 *	* 6.1465 *	* 7.3615 *	M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6741 *	* 1.0317 *	* 1.0241 *	* .8420 *	* .9591 *	* .8529 *	* .8778 *	* .5386 *
	* 2.1284 *	* 1.6924 *	* 1.7918 *	* 2.1065 *	* 1.9007 *	* 2.0730 *	* 2.0645 *	* 3.3341 *
9	* 1.0317 *	* 1.0208 *	* .8843 *	* .9699 *	* .8659 *	* 1.0046 *	* .8984 *	* .6231 *
	* 1.6924 *	* 1.7113 *	* 2.0160 *	* 1.8840 *	* 2.0423 *	* 1.8141 *	* 1.9633 *	* 2.8807 *
10	* 1.0241 *	* .8843 *	* .9612 *	* .8171 *	* .9905 *	* .9992 *	* .8713 *	* .5180 *
	* 1.7918 *	* 2.0160 *	* 1.9021 *	* 2.1697 *	* 1.8390 *	* 1.8199 *	* 2.0253 *	* 3.4661 *
11	* .8420 *	* .9710 *	* .8182 *	* .8767 *	* .7878 *	* .8843 *	* .7878 *	* .4465 *
	* 2.1065 *	* 1.8828 *	* 2.1663 *	* 2.0866 *	* 2.2388 *	* 2.0348 *	* 2.2248 *	* 3.9931 *
12	* .9591 *	* .8659 *	* .9894 *	* .7878 *	* .6502 *	* .6751 *	* .5310 *	
	* 1.9007 *	* 2.0423 *	* 1.8402 *	* 2.2388 *	* 2.0432 *	* 2.1723 *	* 3.1799 *	
13	* .8529 *	* 1.0046 *	* .9992 *	* .8843 *	* .6762 *	* .5581 *	* .3685 *	
	* 2.0730 *	* 1.8150 *	* 1.8199 *	* 2.0340 *	* 2.1707 *	* 2.3747 *	* 4.1539 *	
14	* .8778 *	* .8984 *	* .8713 *	* .7878 *	* .5310 *	* .3685 *		
	* 2.0645 *	* 1.9633 *	* 2.0253 *	* 2.2246 *	* 3.1799 *	* 4.1539 *		
15	* .5386 *	* .6242 *	* .5191 *	* .4465 *	F-SUB-Q			
	* 3.3341 *	* 2.8779 *	* 3.4654 *	* 3.9931 *	M-SUB-Q			

CNEI-0400-24
Appendix A, Rev. 18
Page 62 of 268

	H	G	F	E	D	C	B	A
8	* .9179	* 1.4565	* 1.4435	* 1.2278	* 1.3557	* 1.2582	* 1.2593	* .7478
	* 1.6978	* 1.2945	* 1.3557	* 1.5365	* 1.4353	* 1.4925	* 1.5343	* 2.5635
9	* 1.4565	* 1.4359	* 1.2907	* 1.3730	* 1.2831	* 1.4381	* 1.3514	* .8951
	* 1.2945	* 1.3054	* 1.4711	* 1.4231	* 1.4649	* 1.3487	* 1.3847	* 2.1416
10	* 1.4435	* 1.2896	* 1.3600	* 1.1953	* 1.4207	* 1.4435	* 1.3243	* .7347
	* 1.3557	* 1.4719	* 1.4410	* 1.5808	* 1.3677	* 1.3428	* 1.4137	* 2.6059
11	* 1.2278	* 1.3741	* 1.1953	* 1.2473	* 1.1834	* 1.2972	* 1.2159	* .6405
	* 1.5365	* 1.4219	* 1.5806	* 1.5737	* 1.5861	* 1.4794	* 1.5391	* 2.9956
12	* 1.3557	* 1.2820	* 1.4196	* 1.1834	* .9537	* 1.0479	* .7651	*
	* 1.4353	* 1.4656	* 1.3690	* 1.5861	* 1.4915	* 1.5123	* 2.3782	*
13	* 1.2582	* 1.4370	* 1.4435	* 1.2983	* 1.0479	* .8962	* .5353	*
	* 1.4925	* 1.3499	* 1.3428	* 1.4791	* 1.5119	* 1.6162	* 3.1068	*
14	* 1.2593	* 1.3514	* 1.3243	* 1.2159	* .7651	* .5353	*	*
	* 1.5343	* 1.3847	* 1.4137	* 1.5391	* 2.3763	* 3.1068	*	*
15	* .7478	* .8962	* .7347	* .6405	* F-SUB-Q			
	* 2.5635	* 2.1385	* 2.6059	* 2.9926	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 63 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9710	* 1.5475	* 1.5378	* 1.3319	* 1.4587	* 1.3676	* 1.3535	* .7933
	* 1.7047	* 1.2879	* 1.3354	* 1.4759	* 1.3917	* 1.4289	* 1.4863	* 2.5175
9	* 1.5475	* 1.5280	* 1.3904	* 1.4727	* 1.3915	* 1.5410	* 1.4717	* .9547
	* 1.2879	* 1.2967	* 1.4307	* 1.3882	* 1.4052	* 1.3109	* 1.3231	* 2.0923
10	* 1.5378	* 1.3893	* 1.4597	* 1.2994	* 1.5258	* 1.5486	* 1.4457	* .7878
	* 1.3354	* 1.4313	* 1.4056	* 1.5203	* 1.3296	* 1.3046	* 1.3466	* 2.5318
11	* 1.3319	* 1.4749	* 1.2994	* 1.3470	* 1.2972	* 1.4142	* 1.3373	* .6903
	* 1.4759	* 1.3863	* 1.5203	* 1.5264	* 1.5166	* 1.4261	* 1.4601	* 2.8984
12	* 1.4587	* 1.3915	* 1.5248	* 1.2972	* 1.0512	* 1.1682	* .8355	*
	* 1.3917	* 1.4059	* 1.3308	* 1.5162	* 1.4310	* 1.4336	* 2.3029	*
13	* 1.3676	* 1.5399	* 1.5486	* 1.4142	* 1.1693	* 1.0154	* .5895	*
	* 1.4289	* 1.3121	* 1.3040	* 1.4254	* 1.4333	* 1.5250	* 3.0111	*
14	* 1.3535	* 1.4717	* 1.4457	* 1.3384	* .8366	* .5906	*	*
	* 1.4863	* 1.3231	* 1.3466	* 1.4601	* 2.3029	* 3.0111	*	*
15	* .7933	* .9569	* .7889	* .6914	* F-SUB-Q			
	* 2.5175	* 2.0882	* 2.5318	* 2.8955	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0328	* 1.6255	* 1.6115	* 1.4034	* 1.5324	* 1.4413	* 1.4186	* .8247
	* 1.7426	* 1.3124	* 1.3523	* 1.4664	* 1.3880	* 1.4161	* 1.4812	* 2.5273
9	* 1.6255	* 1.6039	* 1.4662	* 1.5443	* 1.4695	* 1.6169	* 1.5529	* .9948
	* 1.3124	* 1.3193	* 1.4407	* 1.3905	* 1.3982	* 1.3110	* 1.3078	* 2.0966
10	* 1.6115	* 1.4652	* 1.5324	* 1.3720	* 1.6060	* 1.6299	* 1.5302	* .8258
	* 1.3523	* 1.4407	* 1.4141	* 1.5124	* 1.3325	* 1.3058	* 1.3325	* 2.5379
11	* 1.4034	* 1.5464	* 1.3730	* 1.4283	* 1.3904	* 1.5150	* 1.4327	* .7282
	* 1.4664	* 1.3893	* 1.5116	* 1.5218	* 1.4975	* 1.4134	* 1.4479	* 2.9064
12	* 1.5324	* 1.4695	* 1.6039	* 1.3904	* 1.1563	* 1.2820	* .9006	*
	* 1.3880	* 1.3982	* 1.3337	* 1.4975	* 1.4195	* 1.4130	* 2.2961	*
13	* 1.4413	* 1.6158	* 1.6299	* 1.5150	* 1.2820	* 1.1390	* .6437	*
	* 1.4161	* 1.3121	* 1.3058	* 1.4127	* 1.4130	* 1.5038	* 3.0150	*
14	* 1.4186	* 1.5540	* 1.5302	* 1.4327	* .9006	* .6437	*	*
	* 1.4812	* 1.3078	* 1.3325	* 1.4472	* 2.2961	* 3.0149	*	*
15	* .8247	* .9970	* .8269	* .7293	* F-SUB-Q			
	* 2.5273	* 2.0923	* 2.5358	* 2.9064	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 64 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1585	* 1.7296	* 1.7003	* 1.4727	* 1.6082	* 1.5128	* 1.4847	* .8594
	* 1.7811	* 1.3345	* 1.3825	* 1.4824	* 1.4044	* 1.4278	* 1.4947	* 2.5592
9	* 1.7296	* 1.7025	* 1.5508	* 1.6201	* 1.5486	* 1.7003	* 1.6353	* 1.0371
	* 1.3345	* 1.3387	* 1.4681	* 1.4116	* 1.4118	* 1.3267	* 1.3158	* 2.1240
10	* 1.7003	* 1.5497	* 1.6125	* 1.4467	* 1.6960	* 1.7198	* 1.6169	* .8670
	* 1.3825	* 1.4681	* 1.4385	* 1.5301	* 1.3510	* 1.3220	* 1.3407	* 2.5723
11	* 1.4727	* 1.6223	* 1.4478	* 1.5204	* 1.4966	* 1.6353	* 1.5345	* .7694
	* 1.4824	* 1.4103	* 1.5293	* 1.5266	* 1.4857	* 1.4037	* 1.4578	* 2.9487
12	* 1.6082	* 1.5486	* 1.6949	* 1.4977	* 1.3481	* 1.4327	* .9786	*
	* 1.4044	* 1.4125	* 1.3528	* 1.4857	* 1.4145	* 1.4043	* 2.3001	*
13	* 1.5128	* 1.6982	* 1.7209	* 1.6364	* 1.4327	* 1.3080	* .7098	*
	* 1.4278	* 1.3284	* 1.3215	* 1.4031	* 1.4036	* 1.4912	* 3.0189	*
14	* 1.4847	* 1.6353	* 1.6169	* 1.5345	* .9797	* .7109	*	*
	* 1.4947	* 1.3152	* 1.3407	* 1.4578	* 2.2984	* 3.0189	*	*
15	* .8594	* 1.0393	* .8680	* .7705	* F-SUB-Q			
	* 2.5592	* 2.1195	* 2.5701	* 2.9458	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3124	* 1.8065	* 1.7588	* 1.5204	* 1.6537	* 1.5616	* 1.5215	* .8756
	* 1.8533	* 1.3836	* 1.4515	* 1.5487	* 1.4684	* 1.4889	* 1.5595	* 2.6856
9	* 1.8065	* 1.7979	* 1.6169	* 1.6667	* 1.6060	* 1.7523	* 1.6917	* 1.0599
	* 1.3836	* 1.3887	* 1.5210	* 1.4799	* 1.4739	* 1.3880	* 1.3687	* 2.2242
10	* 1.7588	* 1.6147	* 1.6624	* 1.5020	* 1.7567	* 1.7805	* 1.6797	* .8919
	* 1.4515	* 1.5226	* 1.5114	* 1.6002	* 1.4151	* 1.3836	* 1.3954	* 2.6903
11	* 1.5204	* 1.6689	* 1.5020	* 1.5876	* 1.5876	* 1.7307	* 1.6158	* .7954
	* 1.5487	* 1.4785	* 1.5993	* 1.5570	* 1.5143	* 1.4297	* 1.4963	* 3.0890
12	* 1.6537	* 1.6050	* 1.7556	* 1.5876	* 1.6147	* 1.6006	* 1.0414	*
	* 1.4684	* 1.4747	* 1.4171	* 1.5138	* 1.4405	* 1.4283	* 2.3397	*
13	* 1.5616	* 1.7502	* 1.7805	* 1.7318	* 1.6017	* 1.4749	* .7673	*
	* 1.4889	* 1.3899	* 1.3836	* 1.4290	* 1.4276	* 1.5188	* 3.0869	*
14	* 1.5215	* 1.6917	* 1.6808	* 1.6169	* 1.0425	* .7673	*	*
	* 1.5595	* 1.3687	* 1.3954	* 1.4955	* 2.3379	* 3.0869	*	*
15	* .8756	* 1.0620	* .8919	* .7965	* F-SUB-Q			
	* 2.6856	* 2.2194	* 2.6903	* 3.0890	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 65 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3915	* 1.8748	* 1.8163	* 1.5638	* 1.6992	* 1.6071	* 1.5616	* .8951
	* 1.9522	* 1.4532	* 1.5144	* 1.6472	* 1.5486	* 1.5790	* 1.6407	* 2.8337
9	* 1.8748	* 1.8748	* 1.6732	* 1.7122	* 1.6591	* 1.8054	* 1.7448	* 1.0837
	* 1.4532	* 1.4571	* 1.6003	* 1.5645	* 1.5657	* 1.4642	* 1.4499	* 2.3455
10	* 1.8163	* 1.6711	* 1.7122	* 1.5508	* 1.8184	* 1.8488	* 1.7372	* .9179
	* 1.5144	* 1.6020	* 1.6021	* 1.7027	* 1.4942	* 1.4593	* 1.4779	* 2.8337
11	* 1.5638	* 1.7144	* 1.5519	* 1.6646	* 1.6667	* 1.8206	* 1.6895	* .8225
	* 1.6472	* 1.5629	* 1.7018	* 1.6117	* 1.5760	* 1.4749	* 1.5546	* 3.2588
12	* 1.6992	* 1.6581	* 1.8163	* 1.6667	* 1.7632	* 1.7263	* 1.1000	*
	* 1.5486	* 1.5666	* 1.4964	* 1.5760	* 1.4879	* 1.4813	* 2.4133	*
13	* 1.6071	* 1.8033	* 1.8499	* 1.8217	* 1.7263	* 1.6039	* .8182	*
	* 1.5790	* 1.4656	* 1.4593	* 1.4741	* 1.4808	* 1.5712	* 3.1794	*
14	* 1.5616	* 1.7448	* 1.7383	* 1.6906	* 1.1010	* .8182	*	*
	* 1.6407	* 1.4491	* 1.4779	* 1.5544	* 2.4122	* 3.1794	*	*
15	* .8951	* 1.0870	* .9179	* .8225	* F-SUB-Q			
	* 2.8337	* 2.3401	* 2.8337	* 3.2552	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.4121	* 1.8932	* 1.8260	* 1.5692	* 1.7079	* 1.6125	* 1.5681	* .8984
	* 2.1034	* 1.5631	* 1.6203	* 1.8071	* 1.6825	* 1.7296	* 1.7775	* 3.0688
9	* 1.8932	* 1.8921	* 1.6819	* 1.7187	* 1.6700	* 1.8184	* 1.7556	* 1.0859
	* 1.5631	* 1.5640	* 1.7256	* 1.7030	* 1.7158	* 1.5888	* 1.5853	* 2.5446
10	* 1.8260	* 1.6808	* 1.7209	* 1.5605	* 1.8401	* 1.8748	* 1.7502	* .9233
	* 1.6203	* 1.7276	* 1.7179	* 1.8454	* 1.5875	* 1.5534	* 1.6167	* 3.0718
11	* 1.5692	* 1.7220	* 1.5616	* 1.6992	* 1.6938	* 1.8575	* 1.7144	* .8301
	* 1.8071	* 1.7011	* 1.8465	* 1.7215	* 1.6874	* 1.5644	* 1.6573	* 3.4712
12	* 1.7079	* 1.6689	* 1.8390	* 1.6938	* 1.8174	* 1.7762	* 1.1249	*
	* 1.6825	* 1.7168	* 1.5890	* 1.6872	* 1.5885	* 1.5915	* 2.5701	*
13	* 1.6125	* 1.8163	* 1.8759	* 1.8585	* 1.7762	* 1.6559	* .8410	*
	* 1.7296	* 1.5897	* 1.5526	* 1.5636	* 1.5912	* 1.6884	* 3.3889	*
14	* 1.5681	* 1.7556	* 1.7502	* 1.7155	* 1.1249	* .8410	*	*
	* 1.7775	* 1.5853	* 1.6158	* 1.6566	* 2.5701	* 3.3868	*	*
15	* .8984	* 1.0880	* .9244	* .8312	* F-SUB-Q			
	* 3.0688	* 2.5405	* 3.0718	* 3.4705	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 66 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.4327	* 1.9257	* 1.8564	* 1.6050	* 1.7415	* 1.6516	* 1.5974	* .9103
	* 2.1856	* 1.6204	* 1.6818	* 1.9220	* 1.7903	* 1.8621	* 1.9062	* 3.3035
9	* 1.9257	* 1.9236	* 1.7187	* 1.7502	* 1.7133	* 1.8553	* 1.8033	* 1.1032
	* 1.6204	* 1.6221	* 1.7962	* 1.7842	* 1.8004	* 1.6791	* 1.7029	* 2.7335
10	* 1.8564	* 1.7177	* 1.7534	* 1.6050	* 1.8846	* 1.9225	* 1.8000	* .9417
	* 1.6818	* 1.7983	* 1.7831	* 1.9245	* 1.6541	* 1.6196	* 1.7130	* 3.2911
11	* 1.6050	* 1.7534	* 1.6039	* 1.7458	* 1.7491	* 1.9149	* 1.7718	* .8475
	* 1.9220	* 1.7821	* 1.9257	* 1.7872	* 1.7611	* 1.6255	* 1.7382	* 3.6623
12	* 1.7415	* 1.7122	* 1.8835	* 1.7491	* 1.8835	* 1.8466	* 1.1596	*
	* 1.7903	* 1.8014	* 1.6549	* 1.7611	* 1.6558	* 1.6674	* 2.6909	*
13	* 1.6516	* 1.8531	* 1.9236	* 1.9149	* 1.8466	* 1.7296	* .8702	*
	* 1.8621	* 1.6818	* 1.6187	* 1.6247	* 1.6665	* 1.7778	* 3.5609	*
14	* 1.5974	* 1.8033	* 1.8000	* 1.7729	* 1.1606	* .8713	*	*
	* 1.9062	* 1.7029	* 1.7121	* 1.7382	* 2.6886	* 3.5575	*	*
15	* .9103	* 1.1054	* .9417	* .8485	* F-SUB-Q			
	* 3.3035	* 2.7263	* 3.2893	* 3.6623	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.4305	* 1.9257	* 1.8575	* 1.6125	* 1.7491	* 1.6613	* 1.6039	* .9103
	* 2.2549	* 1.6707	* 1.7299	* 1.9793	* 1.8301	* 1.9172	* 1.9896	* 3.5102
9	* 1.9257	* 1.9236	* 1.7231	* 1.7545	* 1.7253	* 1.8650	* 1.8174	* 1.1043
	* 1.6707	* 1.6725	* 1.8588	* 1.8301	* 1.8522	* 1.7175	* 1.7552	* 2.8959
10	* 1.8575	* 1.7220	* 1.7567	* 1.6180	* 1.8986	* 1.9387	* 1.8163	* .9450
	* 1.7299	* 1.8599	* 1.8290	* 1.9831	* 1.6924	* 1.6557	* 1.7581	* 3.3959
11	* 1.6125	* 1.7567	* 1.6169	* 1.7599	* 1.7686	* 1.9366	* 1.7935	* .8529
	* 1.9793	* 1.8279	* 1.9843	* 1.8333	* 1.8123	* 1.6601	* 1.7853	* 3.7773
12	* 1.7491	* 1.7242	* 1.8965	* 1.7686	* 1.9095	* 1.8748	* 1.1726	*
	* 1.8301	* 1.8533	* 1.6943	* 1.8123	* 1.6943	* 1.7165	* 2.7532	*
13	* 1.6613	* 1.8629	* 1.9398	* 1.9377	* 1.8759	* 1.7599	* .8810	*
	* 1.9172	* 1.7194	* 1.6557	* 1.6601	* 1.7165	* 1.8337	* 3.6795	*
14	* 1.6039	* 1.8174	* 1.8163	* 1.7946	* 1.1736	* .8821	*	*
	* 1.9896	* 1.7552	* 1.7581	* 1.7843	* 2.7532	* 3.6752	*	*
15	* .9103	* 1.1065	* .9461	* .8529	* F-SUB-Q			
	* 3.5102	* 2.8879	* 3.3922	* 3.7773	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 67 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.4153	* 1.9030	* 1.8358	* 1.5974	* 1.7339	* 1.6461	* 1.5920	* .9016
	* 2.3344	* 1.7324	* 1.7918	* 2.0493	* 1.8855	* 1.9807	* 2.0360	* 3.5774
9	* 1.9030	* 1.9008	* 1.7025	* 1.7361	* 1.7122	* 1.8520	* 1.8054	* 1.0935
	* 1.7324	* 1.7334	* 1.9319	* 1.8900	* 1.9131	* 1.7666	* 1.8125	* 2.9654
10	* 1.8358	* 1.7014	* 1.7393	* 1.6060	* 1.8878	* 1.9301	* 1.8044	* .9374
	* 1.7918	* 1.9343	* 1.8900	* 2.0519	* 1.7420	* 1.7033	* 1.8146	* 3.4899
11	* 1.5974	* 1.7393	* 1.6050	* 1.7502	* 1.7599	* 1.9312	* 1.7859	* .8453
	* 2.0493	* 1.8866	* 2.0533	* 1.8900	* 1.8720	* 1.7070	* 1.8434	* 3.8829
12	* 1.7339	* 1.7112	* 1.8856	* 1.7599	* 1.9051	* 1.8715	* 1.1682	*
	* 1.8855	* 1.9142	* 1.7440	* 1.8720	* 1.7440	* 1.7725	* 2.8342	*
13	* 1.6461	* 1.8499	* 1.9312	* 1.9322	* 1.8715	* 1.7567	* .8778	*
	* 1.9807	* 1.7685	* 1.7023	* 1.7060	* 1.7725	* 1.8957	* 3.7937	*
14	* 1.5920	* 1.8054	* 1.8044	* 1.7870	* 1.1693	* .8789	*	*
	* 2.0360	* 1.8125	* 1.8146	* 1.8423	* 2.8342	* 3.7891	*	*
15	* .9016	* 1.0956	* .9374	* .8464	* F-SUB-Q			
	* 3.5774	* 2.9598	* 3.4860	* 3.8829	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.4175	* 1.9116	* 1.8455	* 1.6104	* 1.7491	* 1.6635	* 1.6060	* .9071
	* 2.2975	* 1.6957	* 1.7447	* 1.9683	* 1.8136	* 1.9042	* 1.9621	* 3.4401
9	* 1.9116	* 1.9106	* 1.7144	* 1.7480	* 1.7307	* 1.8705	* 1.8282	* 1.1021
	* 1.6957	* 1.6981	* 1.8747	* 1.8227	* 1.8445	* 1.7104	* 1.7434	* 2.8386
10	* 1.8455	* 1.7122	* 1.7513	* 1.6223	* 1.9095	* 1.9539	* 1.8293	* .9450
	* 1.7447	* 1.8769	* 1.8242	* 1.9800	* 1.6905	* 1.6551	* 1.7460	* 3.3226
11	* 1.6104	* 1.7513	* 1.6212	* 1.7686	* 1.7838	* 1.9593	* 1.8141	* .8529
	* 1.9683	* 1.8196	* 1.9771	* 1.8332	* 1.8130	* 1.6585	* 1.7760	* 3.6973
12	* 1.7491	* 1.7307	* 1.9073	* 1.7838	* 1.9344	* 1.9019	* 1.1845	*
	* 1.8136	* 1.8456	* 1.6923	* 1.8130	* 1.7013	* 1.7181	* 2.7245	*
13	* 1.6635	* 1.8683	* 1.9550	* 1.9604	* 1.9030	* 1.7892	* .8897	*
	* 1.9042	* 1.7110	* 1.6543	* 1.6576	* 1.7163	* 1.8276	* 3.6206	*
14	* 1.6060	* 1.8282	* 1.8293	* 1.8152	* 1.1845	* .8897	*	*
	* 1.9621	* 1.7434	* 1.7460	* 1.7774	* 2.7231	* 3.6206	*	*
15	* .9071	* 1.1043	* .9461	* .8540	* F-SUB-Q			
	* 3.4401	* 2.8361	* 3.3145	* 3.6973	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 68 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3958	* 1.8889	* 1.8250	* 1.6006	* 1.7350	* 1.6548	* 1.5930	* .8962
	* 2.1208	* 1.5633	* 1.6101	* 1.8170	* 1.6796	* 1.7570	* 1.8174	* 3.1903
9	* 1.8889	* 1.8878	* 1.6992	* 1.7307	* 1.7231	* 1.8564	* 1.8228	* 1.0913
	* 1.5633	* 1.5665	* 1.7246	* 1.6850	* 1.6984	* 1.5785	* 1.6043	* 2.6361
10	* 1.8250	* 1.6982	* 1.7328	* 1.6147	* 1.8965	* 1.9442	* 1.8239	* .9374
	* 1.6101	* 1.7277	* 1.6866	* 1.8189	* 1.5571	* 1.5207	* 1.6049	* 3.0792
11	* 1.6006	* 1.7339	* 1.6136	* 1.7567	* 1.7794	* 1.9528	* 1.8130	* .8453
	* 1.8170	* 1.6823	* 1.8213	* 1.6842	* 1.6619	* 1.5200	* 1.6263	* 3.4229
12	* 1.7350	* 1.7220	* 1.8943	* 1.7794	* 1.9290	* 1.9019	* 1.1780	*
	* 1.6796	* 1.6993	* 1.5587	* 1.6619	* 1.5590	* 1.5700	* 2.4998	*
13	* 1.6548	* 1.8542	* 1.9442	* 1.9539	* 1.9030	* 1.7914	* .8843	*
	* 1.7570	* 1.5809	* 1.5216	* 1.5192	* 1.5710	* 1.6712	* 3.3300	*
14	* 1.5930	* 1.8228	* 1.8250	* 1.8130	* 1.1780	* .8854	*	*
	* 1.8174	* 1.6043	* 1.6059	* 1.6254	* 2.4978	* 3.3218	*	*
15	* .8962	* 1.0935	* .9374	* .8464	* F-SUB-Q			
	* 3.1903	* 2.6295	* 3.0762	* 3.4229	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3687	* 1.8531	* 1.7914	* 1.5746	* 1.7068	* 1.6299	* 1.5670	* .8789
	* 1.9884	* 1.4635	* 1.5109	* 1.7059	* 1.5748	* 1.6457	* 1.7011	* 3.0019
9	* 1.8531	* 1.8531	* 1.6711	* 1.7003	* 1.6982	* 1.8282	* 1.7979	* 1.0707
	* 1.4635	* 1.4655	* 1.6178	* 1.5835	* 1.5921	* 1.4810	* 1.5041	* 2.4750
10	* 1.7914	* 1.6689	* 1.7025	* 1.5909	* 1.8683	* 1.9171	* 1.8000	* .9201
	* 1.5109	* 1.6175	* 1.5841	* 1.7026	* 1.4562	* 1.4217	* 1.5043	* 2.8997
11	* 1.5746	* 1.7036	* 1.5898	* 1.7296	* 1.7567	* 1.9279	* 1.7903	* .8301
	* 1.7059	* 1.5811	* 1.7024	* 1.5764	* 1.5512	* 1.4179	* 1.5194	* 3.2224
12	* 1.7068	* 1.6971	* 1.8661	* 1.7567	* 1.9051	* 1.8813	* 1.1606	*
	* 1.5748	* 1.5929	* 1.4576	* 1.5512	* 1.4527	* 1.4624	* 2.3379	*
13	* 1.6299	* 1.8250	* 1.9181	* 1.9290	* 1.8813	* 1.7708	* .8713	*
	* 1.6457	* 1.4831	* 1.4225	* 1.4172	* 1.4624	* 1.5539	* 3.1110	*
14	* 1.5670	* 1.7979	* 1.8011	* 1.7914	* 1.1617	* .8713	*	*
	* 1.7011	* 1.5041	* 1.5026	* 1.5187	* 2.3402	* 3.1150	*	*
15	* .8789	* 1.0739	* .9211	* .8312	* F-SUB-Q			
	* 3.0019	* 2.4691	* 2.8970	* 3.2253	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 69 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3351	* 1.8054	* 1.7437	* 1.5313	* 1.6635	* 1.5855	* 1.5291	* .8561
	* 1.8862	* 1.3928	* 1.4385	* 1.6247	* 1.4960	* 1.5686	* 1.6194	* 2.8648
9	* 1.8054	* 1.8054	* 1.6234	* 1.6548	* 1.6537	* 1.7838	* 1.7502	* 1.0425
	* 1.3928	* 1.3941	* 1.5449	* 1.5079	* 1.5182	* 1.4054	* 1.4311	* 2.3647
10	* 1.7437	* 1.6223	* 1.6581	* 1.5475	* 1.8239	* 1.8726	* 1.7534	* .8962
	* 1.4385	* 1.5450	* 1.5100	* 1.6294	* 1.3869	* 1.3530	* 1.4326	* 2.7579
11	* 1.5313	* 1.6581	* 1.5464	* 1.6873	* 1.7122	* 1.8846	* 1.7448	* .8084
	* 1.6247	* 1.5052	* 1.6303	* 1.5012	* 1.4804	* 1.3478	* 1.4514	* 3.0824
12	* 1.6635	* 1.6526	* 1.8217	* 1.7122	* 1.8596	* 1.8347	* 1.1325	*
	* 1.4960	* 1.5189	* 1.3893	* 1.4804	* 1.3801	* 1.3921	* 2.2295	*
13	* 1.5855	* 1.7805	* 1.8737	* 1.8846	* 1.8358	* 1.7263	* .8485	*
	* 1.5686	* 1.4073	* 1.3525	* 1.3486	* 1.3915	* 1.4810	* 2.9741	*
14	* 1.5291	* 1.7502	* 1.7534	* 1.7458	* 1.1325	* .8485	*	*
	* 1.6194	* 1.4300	* 1.4326	* 1.4499	* 2.2279	* 2.9676	*	*
15	* .8561	* 1.0447	* .8973	* .8084	* F-SUB-Q			
	* 2.8648	* 2.3564	* 2.7596	* 3.0814	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3069	* 1.7762	* 1.7144	* 1.5118	* 1.6375	* 1.5670	* 1.5020	* .8377
	* 1.7814	* 1.3143	* 1.3582	* 1.5356	* 1.4186	* 1.4835	* 1.5407	* 2.7437
9	* 1.7762	* 1.7751	* 1.6039	* 1.6288	* 1.6342	* 1.7556	* 1.7318	* 1.0219
	* 1.3143	* 1.3155	* 1.4534	* 1.4276	* 1.4313	* 1.3320	* 1.3494	* 2.2546
10	* 1.7144	* 1.6017	* 1.6310	* 1.5291	* 1.7968	* 1.8466	* 1.7361	* .8800
	* 1.3582	* 1.4547	* 1.4273	* 1.5373	* 1.3120	* 1.2792	* 1.3490	* 2.6277
11	* 1.5118	* 1.6310	* 1.5280	* 1.6602	* 1.6949	* 1.8607	* 1.7296	* .7922
	* 1.5356	* 1.4250	* 1.5393	* 1.4260	* 1.3966	* 1.2752	* 1.3654	* 2.9327
12	* 1.6375	* 1.6331	* 1.7946	* 1.6949	* 1.8390	* 1.8195	* 1.1151	*
	* 1.4186	* 1.4320	* 1.3131	* 1.3966	* 1.3025	* 1.3138	* 2.1204	*
13	* 1.5670	* 1.7523	* 1.8466	* 1.8618	* 1.8195	* 1.7122	* .8355	*
	* 1.4835	* 1.3333	* 1.2778	* 1.2746	* 1.3133	* 1.3969	* 2.8320	*
14	* 1.5020	* 1.7328	* 1.7361	* 1.7307	* 1.1151	* .8355	*	*
	* 1.5407	* 1.3494	* 1.3490	* 1.3648	* 2.1204	* 2.8307	*	*
15	* .8377	* 1.0252	* .8800	* .7933	* F-SUB-Q			
	* 2.7437	* 2.2509	* 2.6277	* 2.9299	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 70 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2647	* 1.7187	* 1.6581	* 1.4597	* 1.5811	* 1.5128	* 1.4489	* .8063
	* 1.7191	* 1.2716	* 1.3189	* 1.5002	* 1.3846	* 1.4500	* 1.5092	* 2.6959
9	* 1.7187	* 1.7187	* 1.5508	* 1.5724	* 1.5790	* 1.6960	* 1.6732	* .9840
	* 1.2716	* 1.2730	* 1.4112	* 1.3914	* 1.3943	* 1.2975	* 1.3166	* 2.2165
10	* 1.6581	* 1.5497	* 1.5746	* 1.4771	* 1.7372	* 1.7849	* 1.6776	* .8464
	* 1.3189	* 1.4125	* 1.3897	* 1.4959	* 1.2742	* 1.2411	* 1.3151	* 2.5775
11	* 1.4597	* 1.5757	* 1.4749	* 1.6039	* 1.6386	* 1.8000	* 1.6711	* .7618
	* 1.5002	* 1.3889	* 1.4973	* 1.3833	* 1.3547	* 1.2347	* 1.3266	* 2.8720
12	* 1.5811	* 1.5779	* 1.7350	* 1.6386	* 1.7784	* 1.7588	* 1.0761	*
	* 1.3846	* 1.3960	* 1.2749	* 1.3543	* 1.2558	* 1.2711	* 2.0598	*
13	* 1.5128	* 1.6938	* 1.7859	* 1.8011	* 1.7599	* 1.6548	* .8052	*
	* 1.4500	* 1.3000	* 1.2406	* 1.2342	* 1.2714	* 1.3556	* 2.7581	*
14	* 1.4489	* 1.6732	* 1.6776	* 1.6721	* 1.0772	* .8052	*	*
	* 1.5092	* 1.3170	* 1.3155	* 1.3260	* 2.0585	* 2.7581	*	*
15	* .8063	* .9862	* .8475	* .7629	* F-SUB-Q			
	* 2.6959	* 2.2118	* 2.5790	* 2.8738	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1997	* 1.6277	* 1.5659	* 1.3687	* 1.4890	* 1.4164	* 1.3611	* .7575
	* 1.7163	* 1.2724	* 1.3257	* 1.5236	* 1.3999	* 1.4753	* 1.5308	* 2.7427
9	* 1.6277	* 1.6266	* 1.4576	* 1.4814	* 1.4814	* 1.5985	* 1.5638	* .9211
	* 1.2724	* 1.2739	* 1.4251	* 1.4053	* 1.4151	* 1.3090	* 1.3410	* 2.2604
10	* 1.5659	* 1.4565	* 1.4836	* 1.3839	* 1.6375	* 1.6819	* 1.5670	* .7933
	* 1.3257	* 1.4264	* 1.4019	* 1.5167	* 1.2818	* 1.2493	* 1.3389	* 2.6268
11	* 1.3687	* 1.4836	* 1.3828	* 1.5096	* 1.5367	* 1.6938	* 1.5616	* .7131
	* 1.5236	* 1.4023	* 1.5181	* 1.3928	* 1.3704	* 1.2440	* 1.3488	* 2.9271
12	* 1.4890	* 1.4803	* 1.6353	* 1.5367	* 1.6721	* 1.6461	* 1.0100	*
	* 1.3999	* 1.4157	* 1.2838	* 1.3715	* 1.2640	* 1.2862	* 2.0823	*
13	* 1.4164	* 1.5963	* 1.6830	* 1.6949	* 1.6472	* 1.5432	* .7543	*
	* 1.4753	* 1.3116	* 1.2488	* 1.2431	* 1.2857	* 1.3750	* 2.7938	*
14	* 1.3611	* 1.5638	* 1.5670	* 1.5616	* 1.0111	* .7543	*	*
	* 1.5308	* 1.3414	* 1.3389	* 1.3482	* 2.0810	* 2.7896	*	*
15	* .7575	* .9233	* .7933	* .7131	* F-SUB-Q			
	* 2.7427	* 2.2539	* 2.6231	* 2.9271	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 71 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1368	* 1.5399	* 1.4803	* 1.2896	* 1.4088	* 1.3308	* 1.2777	* .7098
	* 1.7387	* 1.2893	* 1.3457	* 1.5549	* 1.4211	* 1.5092	* 1.5692	* 2.8172
9	* 1.5399	* 1.5389	* 1.3730	* 1.4001	* 1.3904	* 1.5063	* 1.4608	* .8594
	* 1.2893	* 1.2915	* 1.4520	* 1.4271	* 1.4469	* 1.3345	* 1.3806	* 2.3325
10	* 1.4803	* 1.3720	* 1.4023	* 1.3004	* 1.5443	* 1.5833	* 1.4630	* .7402
	* 1.3457	* 1.4533	* 1.4236	* 1.5492	* 1.3043	* 1.2740	* 1.3790	* 2.7107
11	* 1.2896	* 1.4034	* 1.2994	* 1.4229	* 1.4413	* 1.5952	* 1.4576	* .6632
	* 1.5549	* 1.4240	* 1.5500	* 1.4165	* 1.4013	* 1.2666	* 1.3877	* 3.0307
12	* 1.4088	* 1.3904	* 1.5421	* 1.4413	* 1.5768	* 1.5432	* .9493	*
	* 1.4211	* 1.4476	* 1.3063	* 1.4013	* 1.2832	* 1.3154	* 2.1293	*
13	* 1.3308	* 1.5042	* 1.5844	* 1.5952	* 1.5432	* 1.4402	* .7066	*
	* 1.5092	* 1.3358	* 1.2735	* 1.2658	* 1.3145	* 1.4119	* 2.8555	*
14	* 1.2777	* 1.4608	* 1.4630	* 1.4576	* .9493	* .7077	*	*
	* 1.5692	* 1.3796	* 1.3790	* 1.3871	* 2.1279	* 2.8572	*	*
15	* .7098	* .8615	* .7402	* .6643	* F-SUB-Q			
	* 2.8172	* 2.3273	* 2.7107	* 3.0277	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0176	* 1.3655	* 1.3189	* 1.1541	* 1.2733	* 1.1823	* 1.1379	* .6307
	* 1.8820	* 1.4089	* 1.4636	* 1.6838	* 1.5230	* 1.6472	* 1.7115	* 3.0822
9	* 1.3655	* 1.3644	* 1.2127	* 1.2593	* 1.2257	* 1.3384	* 1.2701	* .7543
	* 1.4089	* 1.4113	* 1.5924	* 1.5366	* 1.5911	* 1.4553	* 1.5388	* 2.5823
10	* 1.3189	* 1.2116	* 1.2603	* 1.1563	* 1.3709	* 1.3969	* 1.2658	* .6481
	* 1.4636	* 1.5940	* 1.5354	* 1.6883	* 1.4240	* 1.3979	* 1.5464	* 3.0130
11	* 1.1541	* 1.2625	* 1.1552	* 1.2766	* 1.2690	* 1.4142	* 1.2603	* .5798
	* 1.6838	* 1.5344	* 1.6892	* 1.5292	* 1.5420	* 1.3831	* 1.5548	* 3.3732
12	* 1.2733	* 1.2257	* 1.3687	* 1.2690	* 1.4099	* 1.3568	* .8420	*
	* 1.5230	* 1.5919	* 1.4252	* 1.5420	* 1.3882	* 1.4477	* 2.3270	*
13	* 1.1823	* 1.3362	* 1.3980	* 1.4153	* 1.3579	* 1.2528	* .6253	*
	* 1.6472	* 1.4578	* 1.3968	* 1.3825	* 1.4470	* 1.5711	* 3.1355	*
14	* 1.1379	* 1.2701	* 1.2658	* 1.2614	* .8420	* .6253	*	*
	* 1.7115	* 1.5388	* 1.5464	* 1.5540	* 2.3252	* 3.1377	*	*
15	* .6307	* .7564	* .6481	* .5798	* F-SUB-Q			
	* 3.0822	* 2.5760	* 3.0101	* 3.3696	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 72 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8193 *	* 1.0057 *	* .9862 *	* .9450 *	* 1.0371 *	* .9450 *	* .8973 *	* .5072 *
	* 2.2909 *	* 1.8730 *	* 1.9107 *	* 2.0049 *	* 1.8271 *	* 2.0115 *	* 2.1229 *	* 3.7607 *
9	* 1.0057 *	* 1.0100 *	* .9580 *	* .9742 *	* .9667 *	* 1.0198 *	* .9851 *	* .5830 *
	* 1.8730 *	* 1.8614 *	* 1.9700 *	* 1.9411 *	* 1.9701 *	* 1.8660 *	* 1.9393 *	* 3.2721 *
10	* .9862 *	* .9569 *	* .9775 *	* .9363 *	* 1.0208 *	* 1.0252 *	* .9634 *	* .5083 *
	* 1.9107 *	* 1.9712 *	* 1.9311 *	* 2.0323 *	* 1.8663 *	* 1.8608 *	* 1.9847 *	* 3.7607 *
11	* .9450 *	* .9753 *	* .9363 *	* .9807 *	* 1.0024 *	* 1.1054 *	* .9677 *	* .4595 *
	* 2.0049 *	* 1.9367 *	* 2.0314 *	* 1.9420 *	* 1.9096 *	* 1.7309 *	* 1.9801 *	* 4.1603 *
12	* 1.0371 *	* .9656 *	* 1.0198 *	* 1.0024 *	* 1.1336 *	* 1.0761 *	* .6762 *	
	* 1.8271 *	* 1.9722 *	* 1.8675 *	* 1.9104 *	* 1.6861 *	* 1.7807 *	* 2.8294 *	
13	* .9450 *	* 1.0187 *	* 1.0252 *	* 1.1054 *	* 1.0761 *	* .9667 *	* .5007 *	
	* 2.0115 *	* 1.8682 *	* 1.8590 *	* 1.7299 *	* 1.7807 *	* 1.9889 *	* 3.8342 *	
14	* .8973 *	* .9851 *	* .9634 *	* .9677 *	* .6762 *	* .5007 *		
	* 2.1229 *	* 1.9393 *	* 1.9847 *	* 1.9789 *	* 2.8311 *	* 3.8263 *		
15	* .5072 *	* .5841 *	* .5093 *					
	* 3.7607 *	* 3.2710 *	* 3.7562 *	* 4.1641 *				

AT 75% POWER, 4 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .5343 *	* .4205 *	* .4367 *	* .4866 *	* .4541 *	* .4779 *	* .4042 *	* .2471 *
	* 3.4582 *	* 4.3953 *	* 4.2272 *	* 3.8106 *	* 4.0821 *	* 3.8880 *	* 4.6160 *	* 7.5885 *
9	* .4205 *	* .4443 *	* .4790 *	* .4465 *	* .4866 *	* .4465 *	* .4216 *	* .2623 *
	* 4.3953 *	* 4.1524 *	* 3.8542 *	* 4.1544 *	* 3.8074 *	* 4.1693 *	* 4.4310 *	* 7.1384 *
10	* .4367 *	* .4790 *	* .4400 *	* .4801 *	* .4421 *	* .4259 *	* .4151 *	* .2590 *
	* 4.2272 *	* 3.8495 *	* 4.1950 *	* 3.8670 *	* 4.2102 *	* 4.3914 *	* 4.5054 *	* 7.2372 *
11	* .4866 *	* .4465 *	* .4801 *	* .4584 *	* .5028 *	* .4649 *	* .3966 *	* .2265 *
	* 3.8106 *	* 4.1452 *	* 3.8703 *	* 4.0662 *	* 3.7142 *	* 4.0158 *	* 4.7251 *	* 8.2767 *
12	* .4541 *	* .4866 *	* .4421 *	* .5028 *	* .4790 *	* .4649 *	* .3392 *	
	* 4.0821 *	* 3.8106 *	* 4.2102 *	* 3.7142 *	* 3.9073 *	* 4.0245 *	* 5.5452 *	
13	* .4779 *	* .4465 *	* .4259 *	* .4649 *	* .4649 *	* .4075 *	* .2493 *	
	* 3.8880 *	* 4.1693 *	* 4.3914 *	* 4.0194 *	* 4.0245 *	* 4.6113 *	* 7.5270 *	
14	* .4042 *	* .4216 *	* .4151 *	* .3966 *	* .3392 *	* .2493 *		
	* 4.6160 *	* 4.4310 *	* 4.5054 *	* 4.7300 *	* 5.5452 *	* 7.5270 *		
15	* .2471 *	* .2633 *	* .2590 *	* .2265 *				
	* 7.5885 *	* 7.1222 *	* 7.2372 *	* 8.2767 *				

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 73 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 50 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .4356 *	* .3966 *	* .4172 *	* .4400 *	* .4205 *	* .4313 *	* .3815 *	* .2503 *
	* 3.5217 *	* 4.4674 *	* 4.2133 *	* 3.8585 *	* 4.1586 *	* 3.9122 *	* 4.5447 *	* 6.8388 *
9	* .3966 *	* .4183 *	* .4367 *	* .4183 *	* .4378 *	* .4161 *	* .3825 *	* .2633 *
	* 4.4674 *	* 4.2006 *	* 3.9015 *	* 4.1765 *	* 3.8743 *	* 4.1885 *	* 4.3968 *	* 6.5150 *
10	* .4172 *	* .4367 *	* .4129 *	* .4248 *	* .4053 *	* .3880 *	* .3695 *	* .2558 *
	* 4.2133 *	* 3.9015 *	* 4.2626 *	* 4.0016 *	* 4.3141 *	* 4.5025 *	* 4.5615 *	* 6.7282 *
11	* .4400 *	* .4183 *	* .4248 *	* .3901 *	* .3739 *	* .3587 *	* .3208 *	* .2124 *
	* 3.8585 *	* 4.1765 *	* 4.0016 *	* 4.4956 *	* 4.3934 *	* 4.8012 *	* 5.2301 *	* 8.0416 *
12	* .4205 *	* .4378 *	* .4053 *	* .3750 *	* .3013 *	* .2785 *	* .2558 *	
	* 4.1586 *	* 3.8743 *	* 4.3072 *	* 4.3934 *	* 4.6642 *	* 4.8168 *	* 6.2786 *	
13	* .4313 *	* .4161 *	* .3880 *	* .3587 *	* .2785 *	* .2319 *	* .1756 *	
	* 3.9122 *	* 4.1885 *	* 4.5025 *	* 4.8012 *	* 4.8168 *	* 5.4405 *	* 8.2796 *	
14	* .3815 *	* .3825 *	* .3695 *	* .3208 *	* .2558 *	* .1756 *		
	* 4.5447 *	* 4.3968 *	* 4.5615 *	* 5.2195 *	* 6.2786 *	* 8.2796 *		
15	* .2503 *	* .2633 *	* .2558 *	* .2124 *	F-SUB-Q			
	* 6.8388 *	* 6.5150 *	* 6.7115 *	* 8.0416 *	M-SUB-Q			

AT 75% POWER, 50 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6015 *	* .9363 *	* .9450 *	* .8182 *	* .9211 *	* .8236 *	* .8247 *	* .4985 *
	* 2.4737 *	* 1.9433 *	* 1.9475 *	* 2.1650 *	* 1.9784 *	* 2.1436 *	* 2.1915 *	* 3.5874 *
9	* .9363 *	* .9331 *	* .8269 *	* .9287 *	* .8236 *	* .9407 *	* .8496 *	* .5787 *
	* 1.9433 *	* 1.9471 *	* 2.1616 *	* 1.9700 *	* 2.1414 *	* 1.9337 *	* 2.0697 *	* 3.0916 *
10	* .9450 *	* .8269 *	* .9157 *	* .7965 *	* .9287 *	* .9298 *	* .8225 *	* .4877 *
	* 1.9475 *	* 2.1599 *	* 2.0012 *	* 2.2300 *	* 1.9570 *	* 1.9518 *	* 2.1366 *	* 3.6785 *
11	* .8182 *	* .9298 *	* .7976 *	* .8442 *	* .7467 *	* .8225 *	* .7402 *	* .4183 *
	* 2.1650 *	* 1.9687 *	* 2.2265 *	* 2.1651 *	* 2.3469 *	* 2.1596 *	* 2.3648 *	* 4.2560 *
12	* .9211 *	* .8236 *	* .9287 *	* .7467 *	* .6296 *	* .6372 *	* .4953 *	
	* 1.9784 *	* 2.1432 *	* 1.9585 *	* 2.3469 *	* 2.1257 *	* 2.2588 *	* 3.3565 *	
13	* .8236 *	* .9407 *	* .9298 *	* .8225 *	* .6372 *	* .5321 *	* .3457 *	
	* 2.1436 *	* 1.9346 *	* 1.9518 *	* 2.1581 *	* 2.2588 *	* 2.4668 *	* 4.3562 *	
14	* .8247 *	* .8496 *	* .8225 *	* .7402 *	* .4963 *	* .3457 *		
	* 2.1915 *	* 2.0697 *	* 2.1366 *	* 2.3626 *	* 3.3565 *	* 4.3562 *		
15	* .4985 *	* .5798 *	* .4877 *	* .4183 *	F-SUB-Q			
	* 3.5874 *	* 3.0881 *	* 3.6735 *	* 4.2566 *	M-SUB-Q			

CNEI-0400-24
Appendix A, Rev. 18
Page 74 of 268

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

	H	G	F	E	D	C	B	A
8	* .7380	* 1.1726	* 1.1834	* 1.0479	* 1.1541	* 1.0609	* 1.0404	* .6199
	* 2.1144	* 1.6140	* 1.6050	* 1.7419	* 1.6293	* 1.7144	* 1.7960	* 2.9853
9	* 1.1726	* 1.1650	* 1.0566	* 1.1671	* 1.0631	* 1.1867	* 1.1043	* .7337
	* 1.6140	* 1.6148	* 1.7450	* 1.6184	* 1.7092	* 1.5773	* 1.6408	* 2.5222
10	* 1.1834	* 1.0577	* 1.1498	* 1.0198	* 1.1747	* 1.1801	* 1.0772	* .6101
	* 1.6050	* 1.7428	* 1.6499	* 1.7960	* 1.5963	* 1.5851	* 1.6788	* 3.0210
11	* 1.0479	* 1.1682	* 1.0219	* 1.0631	* .9688	* 1.0490	* .9753	* .5278
	* 1.7419	* 1.6176	* 1.7961	* 1.7825	* 1.8596	* 1.7441	* 1.8525	* 3.4906
12	* 1.1541	* 1.0631	* 1.1747	* .9699	* .8030	* .8388	* .6231	*
	* 1.6293	* 1.7102	* 1.5972	* 1.8596	* 1.7261	* 1.7818	* 2.7606	*
13	* 1.0609	* 1.1867	* 1.1801	* 1.0501	* .8388	* .7131	* .4367	*
	* 1.7144	* 1.5782	* 1.5851	* 1.7441	* 1.7807	* 1.9210	* 3.5817	*
14	* 1.0404	* 1.1043	* 1.0772	* .9753	* .6242	* .4367	*	*
	* 1.7960	* 1.6408	* 1.6788	* 1.8526	* 2.7606	* 3.5778	*	*
15	* .6199	* .7347	* .6101	* .5278	* F-SUB-Q			
	* 2.9853	* 2.5177	* 3.0210	* 3.4910	* M-SUB-Q			

	H	G	F	E	D	C	B	A
8	* .8279 *	* 1.3362 *	* 1.3568 *	* 1.2528 *	* 1.3492 *	* 1.2690 *	* 1.2137 *	* .7098 *
	* 1.9838 *	* 1.4754 *	* 1.4493 *	* 1.5085 *	* 1.4437 *	* 1.4802 *	* 1.5890 *	* 2.6957 *
9	* 1.3362 *	* 1.3340 *	* 1.2419 *	* 1.3600 *	* 1.2636 *	* 1.3763 *	* 1.3221 *	* .8518 *
	* 1.4754 *	* 1.4762 *	* 1.5338 *	* 1.4374 *	* 1.4895 *	* 1.4091 *	* 1.4146 *	* 2.2465 *
10	* 1.3568 *	* 1.2430 *	* 1.3384 *	* 1.2170 *	* 1.3633 *	* 1.3676 *	* 1.2929 *	* .7098 *
	* 1.4493 *	* 1.5321 *	* 1.4689 *	* 1.5573 *	* 1.4267 *	* 1.4185 *	* 1.4470 *	* 2.6933 *
11	* 1.2528 *	* 1.3611 *	* 1.2192 *	* 1.2452 *	* 1.1596 *	* 1.2333 *	* 1.1769 *	* .6177 *
	* 1.5085 *	* 1.4359 *	* 1.5565 *	* 1.5795 *	* 1.6125 *	* 1.5394 *	* 1.5925 *	* 3.1019 *
12	* 1.3492 *	* 1.2625 *	* 1.3633 *	* 1.1596 *	* .9569 *	* 1.0208 *	* .7326 *	
	* 1.4437 *	* 1.4895 *	* 1.4282 *	* 1.6125 *	* 1.5109 *	* 1.5286 *	* 2.4546 *	
13	* 1.2690 *	* 1.3752 *	* 1.3676 *	* 1.2343 *	* 1.0208 *	* .8843 *	* .5169 *	
	* 1.4802 *	* 1.4097 *	* 1.4185 *	* 1.5393 *	* 1.5279 *	* 1.6323 *	* 3.1797 *	
14	* 1.2137 *	* 1.3221 *	* 1.2929 *	* 1.1769 *	* .7337 *	* .5169 *		
	* 1.5890 *	* 1.4146 *	* 1.4470 *	* 1.5917 *	* 2.4544 *	* 3.1793 *		
15	* .7098 *	* .8529 *	* .7109 *	* .6188 *	F-SUB-Q			
	* 2.6957 *	* 2.2413 *	* 2.6933 *	* 3.0987 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 75 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 50 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8789	* 1.4272	* 1.4597	* 1.3817	* 1.4727	* 1.4001	* 1.3189	* .7608
	* 1.9918	* 1.4513	* 1.4080	* 1.4271	* 1.3824	* 1.3978	* 1.5257	* 2.6231
9	* 1.4272	* 1.4337	* 1.3600	* 1.4793	* 1.3882	* 1.4912	* 1.4565	* .9190
	* 1.4513	* 1.4401	* 1.4595	* 1.3823	* 1.4126	* 1.3578	* 1.3380	* 2.1739
10	* 1.4597	* 1.3611	* 1.4532	* 1.3427	* 1.4793	* 1.4803	* 1.4283	* .7716
	* 1.4080	* 1.4580	* 1.4160	* 1.4751	* 1.3756	* 1.3677	* 1.3646	* 2.5888
11	* 1.3817	* 1.4814	* 1.3449	* 1.3633	* 1.2864	* 1.3557	* 1.3091	* .6751
	* 1.4271	* 1.3810	* 1.4742	* 1.5177	* 1.5257	* 1.4737	* 1.4962	* 2.9726
12	* 1.4727	* 1.3882	* 1.4782	* 1.2864	* 1.0707	* 1.1520	* .8095	*
	* 1.3824	* 1.4128	* 1.3768	* 1.5257	* 1.4348	* 1.4343	* 2.3591	*
13	* 1.4001	* 1.4901	* 1.4803	* 1.3568	* 1.1531	* 1.0165	* .5765	*
	* 1.3978	* 1.3590	* 1.3677	* 1.4730	* 1.4336	* 1.5240	* 3.0530	*
14	* 1.3189	* 1.4565	* 1.4283	* 1.3091	* .8095	* .5765	*	*
	* 1.5257	* 1.3372	* 1.3646	* 1.4952	* 2.3575	* 3.0530	*	*
15	* .7608	* .9201	* .7716	* .6751	* F-SUB-Q			
	* 2.6231	* 2.1692	* 2.5888	* 2.9689	* M-SUB-Q			

AT 75% POWER, 50 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9352	* 1.5031	* 1.5399	* 1.4738	* 1.5638	* 1.4933	* 1.3947	* .7987
	* 2.0322	* 1.4707	* 1.4073	* 1.4022	* 1.3659	* 1.3715	* 1.5090	* 2.6138
9	* 1.5031	* 1.5118	* 1.4478	* 1.5681	* 1.4814	* 1.5779	* 1.5529	* .9667
	* 1.4707	* 1.4490	* 1.4431	* 1.3698	* 1.3869	* 1.3458	* 1.3120	* 2.1611
10	* 1.5399	* 1.4500	* 1.5410	* 1.4370	* 1.5703	* 1.5692	* 1.5269	* .8171
	* 1.4073	* 1.4410	* 1.4100	* 1.4511	* 1.3695	* 1.3624	* 1.3393	* 2.5724
11	* 1.4738	* 1.5692	* 1.4370	* 1.4619	* 1.3926	* 1.4652	* 1.4131	* .7196
	* 1.4022	* 1.3686	* 1.4503	* 1.5027	* 1.4951	* 1.4523	* 1.4719	* 2.9562
12	* 1.5638	* 1.4803	* 1.5692	* 1.3926	* 1.1899	* 1.2788	* .8800	*
	* 1.3659	* 1.3863	* 1.3708	* 1.4951	* 1.4122	* 1.4033	* 2.3383	*
13	* 1.4933	* 1.5768	* 1.5692	* 1.4652	* 1.2788	* 1.1531	* .6361	*
	* 1.3715	* 1.3464	* 1.3624	* 1.4521	* 1.4033	* 1.4912	* 3.0346	*
14	* 1.3947	* 1.5529	* 1.5269	* 1.4131	* .8810	* .6361	*	*
	* 1.5090	* 1.3121	* 1.3393	* 1.4711	* 2.3365	* 3.0340	*	*
15	* .7987	* .9677	* .8171	* .7196	* F-SUB-Q			
	* 2.6138	* 2.1584	* 2.5724	* 2.9525	* M-SUB-Q			

CNEI-0400-24
Appendix A, Rev. 18
Page 76 of 268

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

	H	G	F	E	D	C	B	A
8	* 1.0458	* 1.5985	* 1.6255	* 1.5627	* 1.6548	* 1.5844	* 1.4717	* .8388
	* 2.0722	* 1.4936	* 1.4256	* 1.4046	* 1.3718	* 1.3718	* 1.5156	* 2.6362
9	* 1.5985	* 1.5995	* 1.5334	* 1.6581	* 1.5746	* 1.6689	* 1.6483	* 1.0165
	* 1.4936	* 1.4722	* 1.4512	* 1.3803	* 1.3880	* 1.3528	* 1.3115	* 2.1796
10	* 1.6255	* 1.5356	* 1.6321	* 1.5291	* 1.6689	* 1.6656	* 1.6255	* .8648
	* 1.4256	* 1.4490	* 1.4221	* 1.4553	* 1.3823	* 1.3752	* 1.3399	* 2.5921
11	* 1.5627	* 1.6602	* 1.5302	* 1.5692	* 1.5107	* 1.5909	* 1.5237	* .7662
	* 1.4046	* 1.3790	* 1.4546	* 1.4991	* 1.4786	* 1.4412	* 1.4738	* 2.9778
12	* 1.6548	* 1.5735	* 1.6678	* 1.5107	* 1.3947	* 1.4435	* .9634	
	* 1.3718	* 1.3871	* 1.3836	* 1.4780	* 1.4004	* 1.3863	* 2.3305	
13	* 1.5844	* 1.6678	* 1.6656	* 1.5920	* 1.4435	* 1.3330	* .7077	
	* 1.3718	* 1.3534	* 1.3752	* 1.4407	* 1.3858	* 1.4702	* 3.0223	
14	* 1.4717	* 1.6483	* 1.6255	* 1.5237	* .9645	* .7077	*	
	* 1.5156	* 1.3115	* 1.3391	* 1.4730	* 2.3305	* 3.0217	*	
15	* .8388	* 1.0187	* .8648	* .7662	* F-SUB-Q			
	* 2.6362	* 2.1745	* 2.5894	* 2.9778	* M-SUB-Q			

	H	G	F	E	D	C	B	A
8	* 1.1552	* 1.6646	* 1.6787	* 1.6266	* 1.7133	* 1.6472	* 1.5172	* .8594
	* 2.1581	* 1.5509	* 1.4926	* 1.4582	* 1.4269	* 1.4219	* 1.5752	* 2.7561
9	* 1.6646	* 1.6570	* 1.5941	* 1.7144	* 1.6418	* 1.7274	* 1.7166	* 1.0469
	* 1.5509	* 1.5458	* 1.5119	* 1.4385	* 1.4391	* 1.4078	* 1.3584	* 2.2729
10	* 1.6787	* 1.5963	* 1.6917	* 1.5974	* 1.7372	* 1.7307	* 1.6992	* .8951
	* 1.4926	* 1.5096	* 1.4844	* 1.5123	* 1.4429	* 1.4358	* 1.3879	* 2.6981
11	* 1.6266	* 1.7166	* 1.5985	* 1.6461	* 1.6093	* 1.6949	* 1.6115	* .7965
	* 1.4582	* 1.4372	* 1.5115	* 1.5241	* 1.4984	* 1.4643	* 1.5085	* 3.1050
12	* 1.7133	* 1.6418	* 1.7350	* 1.6093	* 1.6483	* 1.6266	* 1.0317	*
	* 1.4269	* 1.4382	* 1.4450	* 1.4984	* 1.4229	* 1.4066	* 2.3686	*
13	* 1.6472	* 1.7263	* 1.7307	* 1.6960	* 1.6266	* 1.5063	* .7683	*
	* 1.4219	* 1.4084	* 1.4358	* 1.4636	* 1.4064	* 1.4927	* 3.0870	*
14	* 1.5172	* 1.7166	* 1.7003	* 1.6115	* 1.0317	* .7683	*	
	* 1.5752	* 1.3584	* 1.3871	* 1.5078	* 2.3672	* 3.0839	*	
15	* .8594	* 1.0490	* .8951	* .7965	* F-SUB-Q			
	* 2.7561	* 2.2678	* 2.6981	* 3.1050	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 77 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 50 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2192	* 1.7231	* 1.7307	* 1.6808	* 1.7686	* 1.7036	* 1.5627	* .8821
	* 2.2764	* 1.6161	* 1.5780	* 1.5431	* 1.5000	* 1.5024	* 1.6537	* 2.9007
9	* 1.7231	* 1.7122	* 1.6461	* 1.7686	* 1.7036	* 1.7849	* 1.7762	* 1.0783
	* 1.6161	* 1.6263	* 1.6049	* 1.5150	* 1.5212	* 1.4797	* 1.4343	* 2.3899
10	* 1.7307	* 1.6494	* 1.7491	* 1.6581	* 1.8011	* 1.7946	* 1.7653	* .9255
	* 1.5780	* 1.6021	* 1.5655	* 1.6030	* 1.5214	* 1.5128	* 1.4649	* 2.8350
11	* 1.6808	* 1.7708	* 1.6591	* 1.7220	* 1.6960	* 1.7903	* 1.6895	* .8269
	* 1.5431	* 1.5135	* 1.6021	* 1.5745	* 1.5531	* 1.5069	* 1.5644	* 3.2643
12	* 1.7686	* 1.7025	* 1.7989	* 1.6960	* 1.8022	* 1.7632	* 1.0935	*
	* 1.5000	* 1.5204	* 1.5229	* 1.5525	* 1.4684	* 1.4569	* 2.4402	*
13	* 1.7036	* 1.7827	* 1.7957	* 1.7914	* 1.7632	* 1.6418	* .8225	*
	* 1.5024	* 1.4805	* 1.5128	* 1.5062	* 1.4567	* 1.5399	* 3.1711	*
14	* 1.5627	* 1.7773	* 1.7653	* 1.6895	* 1.0935	* .8236	*	*
	* 1.6537	* 1.4343	* 1.4651	* 1.5640	* 2.4383	* 3.1711	*	*
15	* .8821	* 1.0804	* .9255	* .8279	* F-SUB-Q			
	* 2.9007	* 2.3862	* 2.8350	* 3.2652	* M-SUB-Q			

AT 75% POWER, 50 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2311	* 1.7328	* 1.7393	* 1.6917	* 1.7827	* 1.7144	* 1.5746	* .8876
	* 2.4389	* 1.7298	* 1.7207	* 1.6896	* 1.6257	* 1.6437	* 1.7897	* 3.1371
9	* 1.7328	* 1.7220	* 1.6570	* 1.7805	* 1.7177	* 1.8011	* 1.7903	* 1.0848
	* 1.7298	* 1.7405	* 1.7626	* 1.6461	* 1.6640	* 1.6040	* 1.5670	* 2.5902
10	* 1.7393	* 1.6602	* 1.7632	* 1.6732	* 1.8217	* 1.8228	* 1.7816	* .9341
	* 1.7207	* 1.7593	* 1.6962	* 1.7420	* 1.6197	* 1.6139	* 1.6014	* 3.0677
11	* 1.6917	* 1.7827	* 1.6743	* 1.7621	* 1.7285	* 1.8304	* 1.7166	* .8377
	* 1.6896	* 1.6444	* 1.7430	* 1.6775	* 1.6691	* 1.6018	* 1.6676	* 3.4619
12	* 1.7827	* 1.7177	* 1.8206	* 1.7285	* 1.8618	* 1.8184	* 1.1205	*
	* 1.6257	* 1.6629	* 1.6210	* 1.6684	* 1.5664	* 1.5657	* 2.5960	*
13	* 1.7144	* 1.7989	* 1.8228	* 1.8315	* 1.8184	* 1.6992	* .8485	*
	* 1.6437	* 1.6048	* 1.6134	* 1.6009	* 1.5651	* 1.6524	* 3.3768	*
14	* 1.5746	* 1.7903	* 1.7827	* 1.7177	* 1.1216	* .8485	*	*
	* 1.7897	* 1.5670	* 1.6014	* 1.6672	* 2.5955	* 3.3731	*	*
15	* .8876	* 1.0870	* .9341	* .8388	* F-SUB-Q			
	* 3.1371	* 2.5831	* 3.0639	* 3.4619	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 78 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 50 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2463	* 1.7578	* 1.7675	* 1.7350	* 1.8195	* 1.7599	* 1.6050	* .9006 *
	* 2.5496	* 1.8007	* 1.7883	* 1.7983	* 1.7334	* 1.7685	* 1.9188	* 3.3754 *
9	* 1.7578	* 1.7480	* 1.6992	* 1.8152	* 1.7653	* 1.8380	* 1.8412	* 1.1043 *
	* 1.8007	* 1.8112	* 1.8392	* 1.7392	* 1.7682	* 1.7171	* 1.6825	* 2.7785 *
10	* 1.7675	* 1.7025	* 1.7979	* 1.7231	* 1.8661	* 1.8672	* 1.8358	* .9547 *
	* 1.7883	* 1.8348	* 1.7589	* 1.8142	* 1.6919	* 1.6910	* 1.6997	* 3.2728 *
11	* 1.7350	* 1.8174	* 1.7220	* 1.8130	* 1.7870	* 1.8878	* 1.7762	* .8572 *
	* 1.7983	* 1.7373	* 1.8153	* 1.7431	* 1.7461	* 1.6710	* 1.7547	* 3.6510 *
12	* 1.8195	* 1.7643	* 1.8650	* 1.7870	* 1.9312	* 1.8954	* 1.1563	*
	* 1.7334	* 1.7693	* 1.6937	* 1.7461	* 1.6366	* 1.6451	* 2.7208	*
13	* 1.7599	* 1.8358	* 1.8683	* 1.8878	* 1.8954	* 1.7794	* .8789	*
	* 1.7685	* 1.7190	* 1.6900	* 1.6701	* 1.6451	* 1.7380	* 3.5492	*
14	* 1.6050	* 1.8412	* 1.8358	* 1.7773	* 1.1574	* .8800	*	*
	* 1.9188	* 1.6825	* 1.6997	* 1.7537	* 2.7184	* 3.5469	*	*
15	* .9006	* 1.1065	* .9547	* .8572	* F-SUB-Q			
	* 3.3754	* 2.7735	* 3.2718	* 3.6510	* M-SUB-Q			

AT 75% POWER, 50 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2408	* 1.7534	* 1.7675	* 1.7448	* 1.8282	* 1.7718	* 1.6115	* .9016 *
	* 2.6282	* 1.8528	* 1.8322	* 1.8445	* 1.7660	* 1.8134	* 1.9997	* 3.5785 *
9	* 1.7534	* 1.7437	* 1.7068	* 1.8206	* 1.7773	* 1.8455	* 1.8542	* 1.1075 *
	* 1.8528	* 1.8606	* 1.8916	* 1.7760	* 1.8145	* 1.7522	* 1.7346	* 2.9203 *
10	* 1.7675	* 1.7112	* 1.8033	* 1.7383	* 1.8791	* 1.8802	* 1.8531	* .9591 *
	* 1.8322	* 1.8870	* 1.7985	* 1.8633	* 1.7280	* 1.7260	* 1.7414	* 3.3775 *
11	* 1.7448	* 1.8228	* 1.7372	* 1.8282	* 1.8098	* 1.9095	* 1.7979	* .8615 *
	* 1.8445	* 1.7740	* 1.8644	* 1.7821	* 1.7925	* 1.7044	* 1.8008	* 3.7727 *
12	* 1.8282	* 1.7773	* 1.8770	* 1.8109	* 1.9572	* 1.9257	* 1.1693	*
	* 1.7660	* 1.8155	* 1.7299	* 1.7925	* 1.6707	* 1.6904	* 2.7900	*
13	* 1.7718	* 1.8434	* 1.8813	* 1.9106	* 1.9268	* 1.8130	* .8908	*
	* 1.8134	* 1.7541	* 1.7251	* 1.7035	* 1.6895	* 1.7977	* 3.6752	*
14	* 1.6115	* 1.8553	* 1.8542	* 1.7989	* 1.1704	* .8919	*	*
	* 1.9997	* 1.7346	* 1.7405	* 1.7998	* 2.7900	* 3.6752	*	*
15	* .9016	* 1.1097	* .9591	* .8626	* F-SUB-Q			
	* 3.5785	* 2.9121	* 3.3775	* 3.7727	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 79 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 50 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2224	* 1.7263	* 1.7437	* 1.7253	* 1.8098	* 1.7534	* 1.5974	* .8919
	* 2.7187	* 1.9154	* 1.8889	* 1.9038	* 1.8114	* 1.8675	* 2.0399	* 3.6397
9	* 1.7263	* 1.7187	* 1.6862	* 1.8011	* 1.7610	* 1.8293	* 1.8390	* 1.0956
	* 1.9154	* 1.9201	* 1.9560	* 1.8262	* 1.8720	* 1.8000	* 1.7867	* 2.9880
10	* 1.7437	* 1.6906	* 1.7838	* 1.7231	* 1.8650	* 1.8672	* 1.8401	* .9504
	* 1.8889	* 1.9511	* 1.8510	* 1.9248	* 1.7766	* 1.7735	* 1.7938	* 3.4667
11	* 1.7253	* 1.8033	* 1.7220	* 1.8163	* 1.8033	* 1.9030	* 1.7870	* .8550
	* 1.9038	* 1.8241	* 1.9260	* 1.8337	* 1.8499	* 1.7508	* 1.8565	* 3.8686
12	* 1.8098	* 1.7599	* 1.8629	* 1.8044	* 1.9507	* 1.9203	* 1.1650	*
	* 1.8114	* 1.8731	* 1.7786	* 1.8499	* 1.7163	* 1.7430	* 2.8678	*
13	* 1.7534	* 1.8271	* 1.8683	* 1.9041	* 1.9203	* 1.8098	* .8876	*
	* 1.8675	* 1.8031	* 1.7725	* 1.7498	* 1.7430	* 1.8554	* 3.7846	*
14	* 1.5974	* 1.8390	* 1.8401	* 1.7881	* 1.1650	* .8876	*	*
	* 2.0399	* 1.7867	* 1.7938	* 1.8554	* 2.8652	* 3.7800	*	*
15	* .8919	* 1.0978	* .9504	* .8550	* F-SUB-Q			
	* 3.6397	* 2.9823	* 3.4629	* 3.8686	* M-SUB-Q			

AT 75% POWER, 50 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2181	* 1.7274	* 1.7480	* 1.7372	* 1.8217	* 1.7686	* 1.6082	* .8951
	* 2.6209	* 1.8422	* 1.8135	* 1.8198	* 1.7381	* 1.7877	* 1.9579	* 3.4752
9	* 1.7274	* 1.7220	* 1.6971	* 1.8098	* 1.7762	* 1.8412	* 1.8575	* 1.1021
	* 1.8422	* 1.8455	* 1.8708	* 1.7507	* 1.7927	* 1.7305	* 1.7069	* 2.8468
10	* 1.7480	* 1.7003	* 1.7914	* 1.7393	* 1.8791	* 1.8846	* 1.8629	* .9569
	* 1.8135	* 1.8663	* 1.7755	* 1.8444	* 1.7144	* 1.7116	* 1.7144	* 3.2885
11	* 1.7372	* 1.8119	* 1.7383	* 1.8315	* 1.8293	* 1.9279	* 1.8109	* .8605
	* 1.8198	* 1.7488	* 1.8433	* 1.7696	* 1.7815	* 1.6895	* 1.7795	* 3.6735
12	* 1.8217	* 1.7762	* 1.8781	* 1.8293	* 1.9745	* 1.9485	* 1.1769	*
	* 1.7381	* 1.7938	* 1.7162	* 1.7815	* 1.6662	* 1.6796	* 2.7425	*
13	* 1.7686	* 1.8390	* 1.8846	* 1.9290	* 1.9485	* 1.8401	* .8973	*
	* 1.7877	* 1.7305	* 1.7106	* 1.6886	* 1.6796	* 1.7756	* 3.5939	*
14	* 1.6082	* 1.8585	* 1.8629	* 1.8119	* 1.1780	* .8973	*	*
	* 1.9579	* 1.7079	* 1.7125	* 1.7785	* 2.7401	* 3.5980	*	*
15	* .8951	* 1.1043	* .9580	* .8615	* F-SUB-Q			
	* 3.4752	* 2.8391	* 3.2885	* 3.6779	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 80 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 50 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1921	* 1.6982	* 1.7209	* 1.7198	* 1.7989	* 1.7534	* 1.5898	* .8810
	* 2.4759	* 1.7232	* 1.6863	* 1.6824	* 1.6085	* 1.6488	* 1.8078	* 3.2286
9	* 1.6982	* 1.6938	* 1.6776	* 1.7859	* 1.7610	* 1.8195	* 1.8445	* 1.0870
	* 1.7232	* 1.7209	* 1.7323	* 1.6252	* 1.6613	* 1.6003	* 1.5741	* 2.6326
10	* 1.7209	* 1.6819	* 1.7664	* 1.7242	* 1.8585	* 1.8650	* 1.8520	* .9461
	* 1.6863	* 1.7300	* 1.6484	* 1.7106	* 1.5942	* 1.5988	* 1.5819	* 3.0445
11	* 1.7198	* 1.7881	* 1.7231	* 1.8119	* 1.8217	* 1.9160	* 1.8022	* .8507
	* 1.6824	* 1.6213	* 1.7081	* 1.6562	* 1.6606	* 1.5771	* 1.6497	* 3.4180
12	* 1.7989	* 1.7599	* 1.8575	* 1.8217	* 1.9615	* 1.9420	* 1.1671	*
	* 1.6085	* 1.6599	* 1.5967	* 1.6606	* 1.5567	* 1.5645	* 2.5648	*
13	* 1.7534	* 1.8174	* 1.8661	* 1.9171	* 1.9420	* 1.8380	* .8897	*
	* 1.6488	* 1.6033	* 1.5967	* 1.5763	* 1.5645	* 1.6561	* 3.3727	*
14	* 1.5898	* 1.8455	* 1.8531	* 1.8033	* 1.1671	* .8897	*	*
	* 1.8078	* 1.5733	* 1.5832	* 1.6511	* 2.5669	* 3.3691	*	*
15	* .8810	* 1.0902	* .9472	* .8507	* F-SUB-Q			
	* 3.2286	* 2.6274	* 3.0415	* 3.4240	* M-SUB-Q			

AT 75% POWER, 50 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1606	* 1.6559	* 1.6797	* 1.6819	* 1.7599	* 1.7177	* 1.5551	* .8605
	* 2.2976	* 1.6077	* 1.5827	* 1.5796	* 1.5098	* 1.5451	* 1.6997	* 3.0369
9	* 1.6559	* 1.6516	* 1.6396	* 1.7448	* 1.7253	* 1.7805	* 1.8098	* 1.0620
	* 1.6077	* 1.6120	* 1.6236	* 1.5247	* 1.5525	* 1.5019	* 1.4738	* 2.4785
10	* 1.6797	* 1.6440	* 1.7253	* 1.6884	* 1.8206	* 1.8282	* 1.8184	* .9255
	* 1.5827	* 1.6203	* 1.5462	* 1.6013	* 1.4895	* 1.4830	* 1.4787	* 2.8607
11	* 1.6819	* 1.7469	* 1.6873	* 1.7740	* 1.7903	* 1.8824	* 1.7708	* .8312
	* 1.5796	* 1.5242	* 1.5991	* 1.5411	* 1.5382	* 1.4608	* 1.5315	* 3.1998
12	* 1.7599	* 1.7253	* 1.8184	* 1.7914	* 1.9257	* 1.9095	* 1.1444	*
	* 1.5098	* 1.5532	* 1.4916	* 1.5382	* 1.4473	* 1.4522	* 2.3846	*
13	* 1.7177	* 1.7784	* 1.8293	* 1.8835	* 1.9106	* 1.8087	* .8713	*
	* 1.5451	* 1.5026	* 1.4811	* 1.4601	* 1.4533	* 1.5389	* 3.1482	*
14	* 1.5551	* 1.8098	* 1.8184	* 1.7718	* 1.1444	* .8724	*	*
	* 1.6997	* 1.4738	* 1.4787	* 1.5307	* 2.3827	* 3.1400	*	*
15	* .8605	* 1.0653	* .9255	* .8312	* F-SUB-Q			
	* 3.0369	* 2.4699	* 2.8607	* 3.2051	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 81 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 50 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1227	* 1.6006	* 1.6223	* 1.6212	* 1.7014	* 1.6570	* 1.5063	* .8323
	* 2.1855	* 1.5349	* 1.5115	* 1.5135	* 1.4415	* 1.4828	* 1.6241	* 2.9124
9	* 1.6006	* 1.5952	* 1.5800	* 1.6862	* 1.6667	* 1.7253	* 1.7480	* 1.0273
	* 1.5349	* 1.5382	* 1.5579	* 1.4569	* 1.4864	* 1.4329	* 1.4093	* 2.3721
10	* 1.6223	* 1.5833	* 1.6678	* 1.6299	* 1.7643	* 1.7740	* 1.7578	* .8941
	* 1.5115	* 1.5529	* 1.4772	* 1.5276	* 1.4153	* 1.4095	* 1.4134	* 2.7348
11	* 1.6212	* 1.6884	* 1.6288	* 1.7177	* 1.7328	* 1.8271	* 1.7133	* .8041
	* 1.5135	* 1.4539	* 1.5328	* 1.4592	* 1.4632	* 1.3830	* 1.4584	* 3.0691
12	* 1.7014	* 1.6656	* 1.7621	* 1.7328	* 1.8672	* 1.8488	* 1.1086	*
	* 1.4415	* 1.4871	* 1.4166	* 1.4632	* 1.3637	* 1.3727	* 2.2585	*
13	* 1.6570	* 1.7231	* 1.7740	* 1.8282	* 1.8499	* 1.7513	* .8431	*
	* 1.4828	* 1.4352	* 1.4079	* 1.3824	* 1.3727	* 1.4513	* 2.9796	*
14	* 1.5063	* 1.7480	* 1.7578	* 1.7144	* 1.1097	* .8442	*	*
	* 1.6241	* 1.4101	* 1.4134	* 1.4578	* 2.2569	* 2.9723	*	*
15	* .8323	* 1.0295	* .8951	* .8041	* F-SUB-Q			
	* 2.9124	* 2.3668	* 2.7381	* 3.0613	* M-SUB-Q			

AT 75% POWER, 50 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0913	* 1.5584	* 1.5790	* 1.5865	* 1.6591	* 1.6223	* 1.4673	* .8074
	* 2.0792	* 1.4616	* 1.4447	* 1.4433	* 1.3800	* 1.4125	* 1.5582	* 2.8123
9	* 1.5584	* 1.5529	* 1.5454	* 1.6418	* 1.6331	* 1.6819	* 1.7155	* .9992
	* 1.4616	* 1.4670	* 1.4831	* 1.3948	* 1.4113	* 1.3681	* 1.3410	* 2.2775
10	* 1.5790	* 1.5486	* 1.6245	* 1.5952	* 1.7220	* 1.7328	* 1.7263	* .8713
	* 1.4447	* 1.4786	* 1.4099	* 1.4529	* 1.3460	* 1.3396	* 1.3392	* 2.6180
11	* 1.5865	* 1.6440	* 1.5941	* 1.6754	* 1.7025	* 1.7903	* 1.6841	* .7813
	* 1.4433	* 1.3920	* 1.4545	* 1.3922	* 1.3811	* 1.3093	* 1.3810	* 2.9321
12	* 1.6591	* 1.6321	* 1.7198	* 1.7025	* 1.8293	* 1.8184	* 1.0826	*
	* 1.3800	* 1.4120	* 1.3485	* 1.3821	* 1.2875	* 1.2948	* 2.1520	*
13	* 1.6223	* 1.6797	* 1.7339	* 1.7914	* 1.8184	* 1.7242	* .8236	*
	* 1.4125	* 1.3699	* 1.3391	* 1.3087	* 1.2948	* 1.3664	* 2.8308	*
14	* 1.4673	* 1.7155	* 1.7274	* 1.6852	* 1.0837	* .8236	*	*
	* 1.5582	* 1.3396	* 1.3386	* 1.3804	* 2.1513	* 2.8241	*	*
15	* .8074	* 1.0024	* .8724	* .7824	* F-SUB-Q			
	* 2.8123	* 2.2726	* 2.6211	* 2.9294	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 82 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 50 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0447	* 1.4923	* 1.5074	* 1.5128	* 1.5833	* 1.5486	* 1.4012	* .7694
	* 2.0319	* 1.4325	* 1.4228	* 1.4246	* 1.3609	* 1.3946	* 1.5393	* 2.7824
9	* 1.4923	* 1.4847	* 1.4738	* 1.5670	* 1.5605	* 1.6093	* 1.6386	* .9526
	* 1.4325	* 1.4413	* 1.4630	* 1.3746	* 1.3891	* 1.3467	* 1.3218	* 2.2595
10	* 1.5074	* 1.4771	* 1.5497	* 1.5226	* 1.6472	* 1.6591	* 1.6505	* .8312
	* 1.4228	* 1.4596	* 1.3899	* 1.4292	* 1.3202	* 1.3130	* 1.3167	* 2.5960
11	* 1.5128	* 1.5692	* 1.5215	* 1.5995	* 1.6277	* 1.7144	* 1.6115	* .7445
	* 1.4246	* 1.3728	* 1.4290	* 1.3634	* 1.3506	* 1.2804	* 1.3547	* 2.9056
12	* 1.5833	* 1.5594	* 1.6451	* 1.6277	* 1.7502	* 1.7393	* 1.0349	*
	* 1.3609	* 1.3897	* 1.3226	* 1.3514	* 1.2558	* 1.2657	* 2.1081	*
13	* 1.5486	* 1.6060	* 1.6591	* 1.7155	* 1.7404	* 1.6483	* .7857	*
	* 1.3946	* 1.3484	* 1.3124	* 1.2799	* 1.2651	* 1.3384	* 2.7825	*
14	* 1.4012	* 1.6396	* 1.6516	* 1.6115	* 1.0349	* .7868	*	*
	* 1.5393	* 1.3218	* 1.3175	* 1.3541	* 2.1100	* 2.7800	*	*
15	* .7694	* .9547	* .8312	* .7445	* F-SUB-Q			
	* 2.7824	* 2.2546	* 2.5938	* 2.8991	* M-SUB-Q			

AT 75% POWER, 50 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9818	* 1.3969	* 1.4023	* 1.3969	* 1.4717	* 1.4294	* 1.3004	* .7152
	* 2.0548	* 1.4535	* 1.4501	* 1.4698	* 1.3927	* 1.4383	* 1.5772	* 2.8596
9	* 1.3969	* 1.3871	* 1.3600	* 1.4565	* 1.4435	* 1.4988	* 1.5128	* .8810
	* 1.4535	* 1.4639	* 1.5071	* 1.4073	* 1.4280	* 1.3727	* 1.3634	* 2.3283
10	* 1.4023	* 1.3644	* 1.4402	* 1.4045	* 1.5356	* 1.5464	* 1.5226	* .7683
	* 1.4501	* 1.5025	* 1.4214	* 1.4690	* 1.3451	* 1.3363	* 1.3574	* 2.6766
11	* 1.3969	* 1.4587	* 1.4034	* 1.4858	* 1.5031	* 1.5930	* 1.4868	* .6881
	* 1.4698	* 1.4054	* 1.4714	* 1.3924	* 1.3854	* 1.3044	* 1.3937	* 2.9898
12	* 1.4717	* 1.4424	* 1.5334	* 1.5031	* 1.6255	* 1.6071	* .9612	*
	* 1.3927	* 1.4286	* 1.3462	* 1.3839	* 1.2784	* 1.2951	* 2.1565	*
13	* 1.4294	* 1.4966	* 1.5475	* 1.5930	* 1.6071	* 1.5172	* .7282	*
	* 1.4383	* 1.3745	* 1.3357	* 1.3038	* 1.2959	* 1.3749	* 2.8477	*
14	* 1.3004	* 1.5128	* 1.5226	* 1.4879	* .9612	* .7282	*	*
	* 1.5772	* 1.3620	* 1.3582	* 1.3931	* 2.1529	* 2.8477	*	*
15	* .7152	* .8832	* .7683	* .6881	* F-SUB-Q			
	* 2.8596	* 2.3231	* 2.6712	* 2.9898	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 83 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 50 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9222	* 1.3069	* 1.3091	* 1.2939	* 1.3698	* 1.3221	* 1.2051	* .6621
	* 2.1022	* 1.4905	* 1.4922	* 1.5251	* 1.4365	* 1.4948	* 1.6389	* 2.9779
9	* 1.3069	* 1.2972	* 1.2593	* 1.3557	* 1.3373	* 1.3947	* 1.3947	* .8106
	* 1.4905	* 1.5047	* 1.5619	* 1.4514	* 1.4815	* 1.4168	* 1.4211	* 2.4379
10	* 1.3091	* 1.2625	* 1.3405	* 1.2994	* 1.4294	* 1.4381	* 1.4001	* .7077
	* 1.4922	* 1.5599	* 1.4666	* 1.5253	* 1.3861	* 1.3779	* 1.4183	* 2.7999
11	* 1.2939	* 1.3579	* 1.2983	* 1.3785	* 1.3882	* 1.4793	* 1.3698	* .6318
	* 1.5251	* 1.4494	* 1.5268	* 1.4379	* 1.4366	* 1.3447	* 1.4516	* 3.1319
12	* 1.3698	* 1.3362	* 1.4272	* 1.3882	* 1.5107	* 1.4858	* .8908	*
	* 1.4365	* 1.4822	* 1.3865	* 1.4366	* 1.3172	* 1.3435	* 2.2320	*
13	* 1.3221	* 1.3926	* 1.4392	* 1.4803	* 1.4858	* 1.3947	* .6741	*
	* 1.4948	* 1.4187	* 1.3773	* 1.3441	* 1.3435	* 1.4324	* 2.9538	*
14	* 1.2051	* 1.3947	* 1.4012	* 1.3709	* .8908	* .6741	*	*
	* 1.6389	* 1.4205	* 1.4168	* 1.4510	* 2.2304	* 2.9511	*	*
15	* .6621	* .8128	* .7077	* .6318	* F-SUB-Q			
	* 2.9779	* 2.4342	* 2.7974	* 3.1362	* M-SUB-Q			

AT 75% POWER, 50 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8214	* 1.1520	* 1.1541	* 1.1336	* 1.2170	* 1.1520	* 1.0577	* .5809
	* 2.2926	* 1.6432	* 1.6423	* 1.6868	* 1.5685	* 1.6620	* 1.8144	* 3.3075
9	* 1.1520	* 1.1422	* 1.1021	* 1.1986	* 1.1596	* 1.2246	* 1.1986	* .6990
	* 1.6432	* 1.6566	* 1.7323	* 1.5902	* 1.6538	* 1.5664	* 1.6049	* 2.7527
10	* 1.1541	* 1.1043	* 1.1856	* 1.1325	* 1.2538	* 1.2560	* 1.1910	* .6090
	* 1.6423	* 1.7284	* 1.6068	* 1.6969	* 1.5313	* 1.5290	* 1.6164	* 3.1634
11	* 1.1336	* 1.2007	* 1.1314	* 1.2159	* 1.2051	* 1.2961	* 1.1693	* .5440
	* 1.6868	* 1.5898	* 1.6978	* 1.5784	* 1.6027	* 1.4867	* 1.6503	* 3.5451
12	* 1.2170	* 1.1596	* 1.2517	* 1.2051	* 1.3297	* 1.2864	* .7792	*
	* 1.5685	* 1.6546	* 1.5328	* 1.6027	* 1.4492	* 1.5015	* 2.4745	*
13	* 1.1520	* 1.2224	* 1.2571	* 1.2961	* 1.2864	* 1.1932	* .5874	*
	* 1.6620	* 1.5680	* 1.5272	* 1.4877	* 1.5015	* 1.6245	* 3.2895	*
14	* 1.0577	* 1.1986	* 1.1910	* 1.1693	* .7803	* .5874	*	*
	* 1.8144	* 1.6049	* 1.6176	* 1.6494	* 2.4745	* 3.2895	*	*
15	* .5809	* .7012	* .6090	* .5440	* F-SUB-Q			
	* 3.3075	* 2.7479	* 3.1558	* 3.5451	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 84 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 50 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6589 *	* .8453 *	* .8680 *	* .9060 *	* .9688 *	* .8984 *	* .8236 *	* .4595 *
	* 2.7960 *	* 2.1906 *	* 2.1386 *	* 2.0611 *	* 1.9239 *	* 2.0841 *	* 2.2800 *	* 4.0968 *
9	* .8453 *	* .8594 *	* .8735 *	* .9081 *	* .9049 *	* .9309 *	* .9092 *	* .5310 *
	* 2.1906 *	* 2.1598 *	* 2.1328 *	* 2.0524 *	* 2.0651 *	* 2.0124 *	* 2.0676 *	* 3.5491 *
10	* .8680 *	* .8756 *	* .9027 *	* .8919 *	* .9244 *	* .9146 *	* .8897 *	* .4703 *
	* 2.1386 *	* 2.1264 *	* 2.0632 *	* 2.0988 *	* 2.0307 *	* 2.0524 *	* 2.1195 *	* 4.0161 *
11	* .9060 *	* .9092 *	* .8919 *	* .9157 *	* .9493 *	* 1.0035 *	* .8821 *	* .4226 *
	* 2.0611 *	* 2.0498 *	* 2.0974 *	* 2.0479 *	* 1.9854 *	* 1.8776 *	* 2.1418 *	* 4.4614 *
12	* .9688 *	* .9060 *	* .9233 *	* .9493 *	* 1.0469 *	* .9981 *	* .6166 *	
	* 1.9239 *	* 2.0624 *	* 2.0320 *	* 1.9824 *	* 1.7986 *	* 1.8916 *	* 3.0664 *	
13	* .8984 *	* .9309 *	* .9146 *	* 1.0046 *	* .9981 *	* .9016 *	* .4617 *	
	* 2.0841 *	* 2.0106 *	* 2.0543 *	* 1.8765 *	* 1.8916 *	* 2.0994 *	* 4.0979 *	
14	* .8236 *	* .9092 *	* .8897 *	* .8821 *	* .6166 *	* .4617 *		
	* 2.2800 *	* 2.0676 *	* 2.1181 *	* 2.1383 *	* 3.0634 *	* 4.1054 *		
15	* .4595 *	* .5321 *	* .4703 *	* .4226 *	F-SUB-Q			
	* 4.0968 *	* 3.5355 *	* 4.0161 *	* 4.4614 *	M-SUB-Q			

AT 75% POWER, 50 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .4302 *	* .3565 *	* .3901 *	* .4432 *	* .4129 *	* .4335 *	* .3620 *	* .2200 *
	* 4.2328 *	* 5.1044 *	* 4.6811 *	* 4.1173 *	* 4.4375 *	* 4.2351 *	* 5.0829 *	* 8.4178 *
9	* .3565 *	* .3890 *	* .4302 *	* .4053 *	* .4432 *	* .4031 *	* .3771 *	* .2341 *
	* 5.1044 *	* 4.6811 *	* 4.2442 *	* 4.5076 *	* 4.1303 *	* 4.5586 *	* 4.8973 *	* 7.9206 *
10	* .3901 *	* .4302 *	* .3977 *	* .4389 *	* .4010 *	* .3782 *	* .3706 *	* .2319 *
	* 4.6811 *	* 4.2385 *	* 4.5893 *	* 4.1798 *	* 4.5826 *	* 4.8866 *	* 4.9939 *	* 7.9730 *
11	* .4432 *	* .4053 *	* .4389 *	* .4151 *	* .4552 *	* .4151 *	* .3522 *	* .2027 *
	* 4.1173 *	* 4.5167 *	* 4.1798 *	* 4.4350 *	* 4.0409 *	* 4.4413 *	* 5.2478 *	* 9.1492 *
12	* .4129 *	* .4443 *	* .4010 *	* .4552 *	* .4313 *	* .4172 *	* .3013 *	
	* 4.4375 *	* 4.1173 *	* 4.5826 *	* 4.0409 *	* 4.2673 *	* 4.4375 *	* 6.1799 *	
13	* .4335 *	* .4031 *	* .3782 *	* .4151 *	* .4172 *	* .3663 *	* .2243 *	
	* 4.2351 *	* 4.5586 *	* 4.8684 *	* 4.4413 *	* 4.4375 *	* 5.0551 *	* 8.2977 *	
14	* .3620 *	* .3771 *	* .3706 *	* .3522 *	* .3013 *	* .2243 *		
	* 5.0829 *	* 4.8973 *	* 4.9749 *	* 5.2601 *	* 6.1509 *	* 8.2977 *		
15	* .2200 *	* .2352 *	* .2319 *	* .2027 *	F-SUB-Q			
	* 8.4178 *	* 7.8730 *	* 8.0014 *	* 9.1492 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 85 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 200 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .4216 *	* .4161 *	* .4606 *	* .4985 *	* .4768 *	* .4822 *	* .4140 *	* .2709 *
	* 4.0272 *	* 4.5463 *	* 4.0921 *	* 3.6546 *	* 3.9352 *	* 3.7633 *	* 4.4902 *	* 6.7982 *
9	* .4161 *	* .4530 *	* .4866 *	* .4692 *	* .4942 *	* .4595 *	* .4194 *	* .2861 *
	* 4.5463 *	* 4.1630 *	* 3.7577 *	* 4.0014 *	* 3.6837 *	* 4.0692 *	* 4.3039 *	* 6.4341 *
10	* .4606 *	* .4866 *	* .4584 *	* .4822 *	* .4530 *	* .4226 *	* .4021 *	* .2785 *
	* 4.0921 *	* 3.7571 *	* 4.1036 *	* 3.7784 *	* 4.1400 *	* 4.4271 *	* 4.4765 *	* 6.6111 *
11	* .4985 *	* .4692 *	* .4833 *	* .4411 *	* .4194 *	* .3869 *	* .3490 *	* .2319 *
	* 3.6546 *	* 4.0014 *	* 3.7733 *	* 4.2565 *	* 4.1821 *	* 4.6908 *	* 5.1327 *	* 7.8913 *
12	* .4768 *	* .4942 *	* .4530 *	* .4194 *	* .3370 *	* .3056 *	* .2742 *	
	* 3.9352 *	* 3.6837 *	* 4.1393 *	* 4.1821 *	* 4.4212 *	* 4.6329 *	* 6.2006 *	
13	* .4822 *	* .4595 *	* .4226 *	* .3869 *	* .3056 *	* .2579 *	* .1918 *	
	* 3.7633 *	* 4.0692 *	* 4.4271 *	* 4.6908 *	* 4.6329 *	* 5.1738 *	* 7.9771 *	
14	* .4140 *	* .4194 *	* .4021 *	* .3490 *	* .2742 *	* .1918 *		
	* 4.4902 *	* 4.3039 *	* 4.4765 *	* 5.1327 *	* 6.1987 *	* 7.9771 *		
15	* .2709 *	* .2861 *	* .2785 *	* .2319 *	F-SUB-Q			
	* 6.7982 *	* 6.4341 *	* 6.6111 *	* 7.8732 *	M-SUB-Q			

AT 75% POWER, 200 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .5776 *	* .9320 *	* 1.0154 *	* .9547 *	* 1.0393 *	* .9439 *	* .8908 *	* .5299 *
	* 2.9175 *	* 2.1066 *	* 1.9243 *	* 1.9816 *	* 1.8733 *	* 1.9973 *	* 2.1655 *	* 3.5978 *
9	* .9320 *	* .9786 *	* .9352 *	* 1.0447 *	* .9526 *	* 1.0176 *	* .9331 *	* .6188 *
	* 2.1066 *	* 2.0016 *	* 2.0275 *	* 1.8682 *	* 1.9858 *	* 1.9068 *	* 2.0089 *	* 3.0801 *
10	* 1.0154 *	* .9363 *	* 1.0198 *	* .9298 *	* 1.0003 *	* .9699 *	* .8973 *	* .5343 *
	* 1.9243 *	* 2.0261 *	* 1.9140 *	* 2.0362 *	* 1.9425 *	* 1.9919 *	* 2.0868 *	* 3.5715 *
11	* .9547 *	* 1.0447 *	* .9309 *	* .9580 *	* .8420 *	* .8637 *	* .7987 *	* .4552 *
	* 1.9816 *	* 1.8670 *	* 2.0333 *	* 2.0325 *	* 2.2070 *	* 2.1547 *	* 2.3233 *	* 4.1627 *
12	* 1.0393 *	* .9537 *	* 1.0003 *	* .8420 *	* .7131 *	* .6968 *	* .5278 *	
	* 1.8733 *	* 1.9846 *	* 1.9425 *	* 2.2070 *	* 2.0342 *	* 2.1540 *	* 3.3100 *	
13	* .9439 *	* 1.0165 *	* .9699 *	* .8648 *	* .6968 *	* .5960 *	* .3760 *	
	* 1.9973 *	* 1.9080 *	* 1.9919 *	* 2.1544 *	* 2.1537 *	* 2.3425 *	* 4.2047 *	
14	* .8908 *	* .9331 *	* .8973 *	* .7998 *	* .5288 *	* .3760 *		
	* 2.1655 *	* 2.0089 *	* 2.0866 *	* 2.3233 *	* 3.3095 *	* 4.2047 *		
15	* .5299 *	* .6199 *	* .5343 *	* .4552 *	F-SUB-Q			
	* 3.5978 *	* 3.0769 *	* 3.5709 *	* 4.1627 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 86 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 200 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6947	* 1.1368	* 1.2571	* 1.2257	* 1.2885	* 1.2083	* 1.1054	* .6491
	* 2.5568	* 1.7752	* 1.6004	* 1.5829	* 1.5524	* 1.6010	* 1.7963	* 3.0295
9	* 1.1368	* 1.2040	* 1.1975	* 1.2994	* 1.2192	* 1.2625	* 1.1964	* .7716
	* 1.7752	* 1.6721	* 1.6264	* 1.5433	* 1.5918	* 1.5780	* 1.6097	* 2.5448
10	* 1.2571	* 1.1986	* 1.2679	* 1.1899	* 1.2419	* 1.1986	* 1.1541	* .6589
	* 1.6004	* 1.6246	* 1.5837	* 1.6350	* 1.6076	* 1.6536	* 1.6621	* 2.9708
11	* 1.2257	* 1.3004	* 1.1921	* 1.1932	* 1.0783	* 1.0739	* 1.0328	* .5657
	* 1.5829	* 1.5425	* 1.6339	* 1.6808	* 1.7595	* 1.7706	* 1.8468	* 3.4434
12	* 1.2885	* 1.2192	* 1.2408	* 1.0783	* .9016	* .9006	* .6524	*
	* 1.5524	* 1.5911	* 1.6076	* 1.7595	* 1.6716	* 1.7141	* 2.7553	*
13	* 1.2083	* 1.2625	* 1.1986	* 1.0750	* .9006	* .7835	* .4671	*
	* 1.6010	* 1.5788	* 1.6536	* 1.7706	* 1.7140	* 1.8451	* 3.4886	*
14	* 1.1054	* 1.1964	* 1.1541	* 1.0328	* .6524	* .4671	*	*
	* 1.7963	* 1.6097	* 1.6621	* 1.8458	* 2.7553	* 3.4880	*	*
15	* .6491	* .7727	* .6600	* .5657	F-SUB-Q			
	* 3.0295	* 2.5426	* 2.9704	* 3.4400	M-SUB-Q			

AT 75% POWER, 200 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7618	* 1.2658	* 1.4327	* 1.4597	* 1.4793	* 1.4294	* 1.2593	* .7282
	* 2.4366	* 1.6433	* 1.4451	* 1.3666	* 1.3920	* 1.3898	* 1.6189	* 2.7748
9	* 1.2658	* 1.3633	* 1.4218	* 1.4901	* 1.4424	* 1.4413	* 1.4001	* .8789
	* 1.6433	* 1.5214	* 1.4084	* 1.3848	* 1.3794	* 1.4220	* 1.4101	* 2.2964
10	* 1.4327	* 1.4229	* 1.4554	* 1.4153	* 1.4186	* 1.3514	* 1.3622	* .7521
	* 1.4451	* 1.4069	* 1.4225	* 1.4111	* 1.4502	* 1.5113	* 1.4440	* 2.6875
11	* 1.4597	* 1.4912	* 1.4164	* 1.3709	* 1.2744	* 1.2235	* 1.2137	* .6470
	* 1.3666	* 1.3840	* 1.4103	* 1.5055	* 1.5239	* 1.5838	* 1.6180	* 3.1083
12	* 1.4793	* 1.4424	* 1.4175	* 1.2733	* 1.0501	* 1.0642	* .7445	*
	* 1.3920	* 1.3788	* 1.4508	* 1.5239	* 1.4900	* 1.4946	* 2.4941	*
13	* 1.4294	* 1.4402	* 1.3514	* 1.2235	* 1.0653	* .9407	* .5364	*
	* 1.3898	* 1.4221	* 1.5113	* 1.5838	* 1.4946	* 1.5944	* 3.1505	*
14	* 1.2593	* 1.4001	* 1.3633	* 1.2148	* .7445	* .5375	*	*
	* 1.6189	* 1.4101	* 1.4434	* 1.6180	* 2.4941	* 3.1505	*	*
15	* .7282	* .8800	* .7521	* .6481	F-SUB-Q			
	* 2.7748	* 2.2943	* 2.6854	* 3.1072	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 87 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 200 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7868	* 1.3189	* 1.5204	* 1.5898	* 1.5822	* 1.5519	* 1.3362	* .7640
	* 2.4756	* 1.6393	* 1.4133	* 1.2983	* 1.3488	* 1.3221	* 1.5813	* 2.7423
9	* 1.3189	* 1.4381	* 1.5432	* 1.5909	* 1.5692	* 1.5313	* 1.5053	* .9298
	* 1.6393	* 1.4977	* 1.3430	* 1.3462	* 1.3115	* 1.3861	* 1.3568	* 2.2529
10	* 1.5204	* 1.5454	* 1.5540	* 1.5410	* 1.5096	* 1.4240	* 1.4749	* .7965
	* 1.4133	* 1.3417	* 1.3825	* 1.3430	* 1.4145	* 1.4869	* 1.3770	* 2.6231
11	* 1.5898	* 1.5920	* 1.5432	* 1.4684	* 1.3882	* 1.3015	* 1.3134	* .6881
	* 1.2983	* 1.3450	* 1.3423	* 1.4639	* 1.4444	* 1.5373	* 1.5488	* 3.0285
12	* 1.5822	* 1.5692	* 1.5085	* 1.3871	* 1.1368	* 1.1596	* .7954	*
	* 1.3488	* 1.3109	* 1.4145	* 1.4444	* 1.4416	* 1.4239	* 2.4401	*
13	* 1.5519	* 1.5302	* 1.4240	* 1.3015	* 1.1606	* 1.0371	* .5776	*
	* 1.3221	* 1.3867	* 1.4869	* 1.5365	* 1.4238	* 1.5175	* 3.0781	*
14	* 1.3362	* 1.5053	* 1.4749	* 1.3134	* .7954	* .5776	*	*
	* 1.5813	* 1.3568	* 1.3770	* 1.5480	* 2.4401	* 3.0781	*	*
15	* .7640	* .9309	* .7965	* .6892	* F-SUB-Q			
	* 2.7423	* 2.2495	* 2.6223	* 3.0265	* M-SUB-Q			

AT 75% POWER, 200 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8052	* 1.3492	* 1.5724	* 1.6678	* 1.6451	* 1.6245	* 1.3785	* .7835
	* 2.5442	* 1.6767	* 1.4244	* 1.2843	* 1.3489	* 1.3091	* 1.5902	* 2.7740
9	* 1.3492	* 1.4836	* 1.6169	* 1.6516	* 1.6440	* 1.5833	* 1.5638	* .9569
	* 1.6767	* 1.5188	* 1.3342	* 1.3485	* 1.2993	* 1.3937	* 1.3531	* 2.2717
10	* 1.5724	* 1.6190	* 1.6147	* 1.6190	* 1.5670	* 1.4673	* 1.5410	* .8236
	* 1.4244	* 1.3324	* 1.3879	* 1.3303	* 1.4242	* 1.5099	* 1.3719	* 2.6472
11	* 1.6678	* 1.6526	* 1.6201	* 1.5334	* 1.4641	* 1.3600	* 1.3752	* .7142
	* 1.2843	* 1.3477	* 1.3289	* 1.4682	* 1.4322	* 1.5462	* 1.5535	* 3.0638
12	* 1.6451	* 1.6440	* 1.5659	* 1.4641	* 1.2051	* 1.2322	* .8344	*
	* 1.3489	* 1.2987	* 1.4242	* 1.4322	* 1.4463	* 1.4185	* 2.4661	*
13	* 1.6245	* 1.5822	* 1.4673	* 1.3600	* 1.2322	* 1.1162	* .6123	*
	* 1.3091	* 1.3943	* 1.5099	* 1.5458	* 1.4178	* 1.5142	* 3.1180	*
14	* 1.3785	* 1.5649	* 1.5410	* 1.3752	* .8344	* .6123	*	*
	* 1.5902	* 1.3531	* 1.3719	* 1.5532	* 2.4661	* 3.1147	*	*
15	* .7835	* .9580	* .8236	* .7142	* F-SUB-Q			
	* 2.7740	* 2.2683	* 2.6472	* 3.0638	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 88 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 200 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8410	* 1.3926	* 1.6255	* 1.7383	* 1.7047	* 1.6917	* 1.4186	* .8041
	* 2.6003	* 1.7273	* 1.4550	* 1.2945	* 1.3712	* 1.3197	* 1.6225	* 2.8373
9	* 1.3926	* 1.5324	* 1.6862	* 1.7112	* 1.7122	* 1.6342	* 1.6190	* .9851
	* 1.7273	* 1.5559	* 1.3476	* 1.3733	* 1.3114	* 1.4229	* 1.3741	* 2.3232
10	* 1.6255	* 1.6873	* 1.6776	* 1.6938	* 1.6266	* 1.5139	* 1.6050	* .8507
	* 1.4550	* 1.3457	* 1.4125	* 1.3428	* 1.4552	* 1.5519	* 1.3910	* 2.7056
11	* 1.7383	* 1.7122	* 1.6949	* 1.6050	* 1.5475	* 1.4327	* 1.4392	* .7413
	* 1.2945	* 1.3720	* 1.3414	* 1.4969	* 1.4320	* 1.5638	* 1.5822	* 3.1380
12	* 1.7047	* 1.7133	* 1.6266	* 1.5464	* 1.3059	* 1.3297	* .8832	*
	* 1.3712	* 1.3108	* 1.4559	* 1.4320	* 1.4595	* 1.4236	* 2.5005	*
13	* 1.6917	* 1.6331	* 1.5139	* 1.4327	* 1.3297	* 1.2246	* .6578	*
	* 1.3197	* 1.4236	* 1.5514	* 1.5634	* 1.4236	* 1.5207	* 3.1570	*
14	* 1.4186	* 1.6190	* 1.6050	* 1.4392	* .8843	* .6578	*	*
	* 1.6225	* 1.3737	* 1.3907	* 1.5819	* 2.4985	* 3.1553	*	*
15	* .8041	* .9862	* .8507	* .7413	* F-SUB-Q			
	* 2.8373	* 2.3197	* 2.7056	* 3.1348	* M-SUB-Q			

AT 75% POWER, 200 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9060	* 1.4196	* 1.6483	* 1.7827	* 1.7307	* 1.7307	* 1.4316	* .8084
	* 2.7305	* 1.8321	* 1.5336	* 1.3524	* 1.4402	* 1.3784	* 1.7073	* 2.9979
9	* 1.4196	* 1.5562	* 1.7274	* 1.7372	* 1.7545	* 1.6526	* 1.6472	* .9927
	* 1.8321	* 1.6438	* 1.4104	* 1.4434	* 1.3711	* 1.4987	* 1.4415	* 2.4503
10	* 1.6483	* 1.7307	* 1.7090	* 1.7448	* 1.6581	* 1.5356	* 1.6440	* .8626
	* 1.5336	* 1.4088	* 1.4853	* 1.4050	* 1.5346	* 1.6432	* 1.4579	* 2.8494
11	* 1.7827	* 1.7393	* 1.7469	* 1.6516	* 1.6147	* 1.4923	* 1.4858	* .7543
	* 1.3524	* 1.4425	* 1.4034	* 1.5528	* 1.4660	* 1.6140	* 1.6367	* 3.3126
12	* 1.7307	* 1.7556	* 1.6570	* 1.6147	* 1.4662	* 1.4771	* .9255	*
	* 1.4402	* 1.3705	* 1.5354	* 1.4660	* 1.5066	* 1.4672	* 2.5843	*
13	* 1.7307	* 1.6516	* 1.5356	* 1.4923	* 1.4771	* 1.3568	* .7001	*
	* 1.3784	* 1.4994	* 1.6432	* 1.6131	* 1.4672	* 1.5717	* 3.2774	*
14	* 1.4316	* 1.6472	* 1.6451	* 1.4858	* .9255	* .7001	*	*
	* 1.7073	* 1.4415	* 1.4574	* 1.6359	* 2.5821	* 3.2739	*	*
15	* .8084	* .9948	* .8626	* .7543	* F-SUB-Q			
	* 2.9979	* 2.4457	* 2.8485	* 3.3114	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 89 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 200 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9591	* 1.4489	* 1.6711	* 1.8195	* 1.7556	* 1.7621	* 1.4467	* .8149
	* 2.8833	* 1.9241	* 1.6309	* 1.4395	* 1.5273	* 1.4661	* 1.8119	* 3.1862
9	* 1.4489	* 1.5822	* 1.7632	* 1.7632	* 1.7914	* 1.6721	* 1.6721	* 1.0035
	* 1.9241	* 1.7512	* 1.5038	* 1.5324	* 1.4604	* 1.5917	* 1.5390	* 2.6011
10	* 1.6711	* 1.7653	* 1.7404	* 1.7914	* 1.6906	* 1.5605	* 1.6787	* .8756
	* 1.6309	* 1.5015	* 1.5775	* 1.4973	* 1.6332	* 1.7529	* 1.5542	* 3.0240
11	* 1.8195	* 1.7643	* 1.7924	* 1.6982	* 1.6819	* 1.5529	* 1.5291	* .7694
	* 1.4395	* 1.5308	* 1.4958	* 1.6230	* 1.5337	* 1.6810	* 1.7185	* 3.5085
12	* 1.7556	* 1.7924	* 1.6895	* 1.6819	* 1.6255	* 1.6201	* .9688	*
	* 1.5273	* 1.4597	* 1.6341	* 1.5337	* 1.5712	* 1.5367	* 2.6911	*
13	* 1.7621	* 1.6711	* 1.5605	* 1.5540	* 1.6201	* 1.4825	* .7445	*
	* 1.4661	* 1.5925	* 1.7529	* 1.6808	* 1.5360	* 1.6411	* 3.4067	*
14	* 1.4467	* 1.6721	* 1.6797	* 1.5291	* .9688	* .7445	*	*
	* 1.8119	* 1.5384	* 1.5539	* 1.7177	* 2.6911	* 3.4029	*	*
15	* .8149	* 1.0057	* .8756	* .7694	* F-SUB-Q			
	* 3.1862	* 2.5967	* 3.0220	* 3.5059	* M-SUB-Q			

AT 75% POWER, 200 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9656	* 1.4457	* 1.6613	* 1.8065	* 1.7458	* 1.7469	* 1.4348	* .8074
	* 3.0578	* 2.0426	* 1.7790	* 1.5847	* 1.6645	* 1.6134	* 1.9745	* 3.4680
9	* 1.4457	* 1.5746	* 1.7523	* 1.7523	* 1.7805	* 1.6602	* 1.6570	* .9959
	* 2.0426	* 1.8740	* 1.6498	* 1.6729	* 1.6083	* 1.7376	* 1.6941	* 2.8364
10	* 1.6613	* 1.7556	* 1.7350	* 1.7870	* 1.6873	* 1.5551	* 1.6711	* .8713
	* 1.7790	* 1.6480	* 1.6941	* 1.6112	* 1.7390	* 1.8889	* 1.7077	* 3.2965
11	* 1.8065	* 1.7545	* 1.7892	* 1.7047	* 1.7090	* 1.5833	* 1.5313	* .7694
	* 1.5847	* 1.6711	* 1.6086	* 1.7129	* 1.6571	* 1.8059	* 1.8547	* 3.7460
12	* 1.7458	* 1.7805	* 1.6862	* 1.7090	* 1.6873	* 1.6721	* .9862	*
	* 1.6645	* 1.6074	* 1.7399	* 1.6571	* 1.6898	* 1.6660	* 2.8887	*
13	* 1.7469	* 1.6591	* 1.5551	* 1.5833	* 1.6721	* 1.5389	* .7651	*
	* 1.6134	* 1.7385	* 1.8889	* 1.8048	* 1.6660	* 1.7773	* 3.6523	*
14	* 1.4348	* 1.6581	* 1.6711	* 1.5324	* .9862	* .7651	*	*
	* 1.9745	* 1.6938	* 1.7067	* 1.8536	* 2.8883	* 3.6516	*	*
15	* .8074	* .9970	* .8713	* .7694	* F-SUB-Q			
	* 3.4680	* 2.8312	* 3.2941	* 3.7460	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 90 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 200 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9732	* 1.4543	* 1.6743	* 1.8401	* 1.7621	* 1.7784	* 1.4446	* .8106
	* 3.1617	* 2.1100	* 1.8282	* 1.6416	* 1.7344	* 1.7007	* 2.1229	* 3.7479
9	* 1.4543	* 1.5876	* 1.7849	* 1.7686	* 1.8130	* 1.6732	* 1.6830	* 1.0024
	* 2.1100	* 1.9304	* 1.6941	* 1.7286	* 1.6665	* 1.8293	* 1.7993	* 3.0543
10	* 1.6743	* 1.7870	* 1.7545	* 1.8250	* 1.7057	* 1.5681	* 1.7036	* .8800
	* 1.8282	* 1.6923	* 1.7441	* 1.6558	* 1.7945	* 1.9547	* 1.7775	* 3.4961
11	* 1.8401	* 1.7708	* 1.8271	* 1.7296	* 1.7621	* 1.6255	* 1.5670	* .7781
	* 1.6416	* 1.7276	* 1.6540	* 1.7689	* 1.7064	* 1.8700	* 1.9293	* 3.9542
12	* 1.7621	* 1.8141	* 1.7047	* 1.7621	* 1.7393	* 1.7339	* 1.0100	*
	* 1.7344	* 1.6656	* 1.7945	* 1.7064	* 1.7480	* 1.7314	* 3.0175	*
13	* 1.7784	* 1.6721	* 1.5681	* 1.6255	* 1.7339	* 1.6039	* .7878	*
	* 1.7007	* 1.8304	* 1.9547	* 1.8689	* 1.7314	* 1.8660	* 3.8561	*
14	* 1.4446	* 1.6841	* 1.7047	* 1.5681	* 1.0100	* .7889	*	*
	* 2.1229	* 1.7993	* 1.7775	* 1.9293	* 3.0175	* 3.8561	*	*
15	* .8106	* 1.0046	* .8810	* .7792	* F-SUB-Q			
	* 3.7479	* 3.0483	* 3.4921	* 3.9542	* M-SUB-Q			

AT 75% POWER, 200 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9656	* 1.4435	* 1.6656	* 1.8401	* 1.7567	* 1.7773	* 1.4381	* .8052
	* 3.2992	* 2.1979	* 1.8990	* 1.7090	* 1.7964	* 1.7701	* 2.1994	* 3.9341
9	* 1.4435	* 1.5790	* 1.7838	* 1.7621	* 1.8130	* 1.6656	* 1.6819	* .9970
	* 2.1979	* 2.0062	* 1.7661	* 1.7934	* 1.7366	* 1.8978	* 1.8756	* 3.1849
10	* 1.6656	* 1.7859	* 1.7513	* 1.8282	* 1.7014	* 1.5616	* 1.7057	* .8778
	* 1.8990	* 1.7641	* 1.8100	* 1.7269	* 1.8650	* 2.0349	* 1.8544	* 3.6241
11	* 1.8401	* 1.7643	* 1.8304	* 1.7285	* 1.7762	* 1.6353	* 1.5724	* .7781
	* 1.7090	* 1.7913	* 1.7250	* 1.8365	* 1.7843	* 1.9474	* 2.0165	* 4.1045
12	* 1.7567	* 1.8141	* 1.7003	* 1.7762	* 1.7513	* 1.7513	* 1.0154	*
	* 1.7964	* 1.7356	* 1.8650	* 1.7853	* 1.8216	* 1.8145	* 3.1433	*
13	* 1.7773	* 1.6646	* 1.5616	* 1.6353	* 1.7513	* 1.6255	* .7954	*
	* 1.7701	* 1.8990	* 2.0336	* 1.9474	* 1.8145	* 1.9581	* 4.0252	*
14	* 1.4381	* 1.6819	* 1.7068	* 1.5735	* 1.0154	* .7954	*	*
	* 2.1994	* 1.8756	* 1.8533	* 2.0151	* 3.1433	* 4.0252	*	*
15	* .8052	* .9992	* .8789	* .7781	* F-SUB-Q			
	* 3.9341	* 3.1785	* 3.6241	* 4.1045	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 91 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 200 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9493	* 1.4207	* 1.6429	* 1.8152	* 1.7350	* 1.7523	* 1.4196	* .7933
	* 3.4401	* 2.2918	* 1.9769	* 1.7867	* 1.8675	* 1.8477	* 2.2751	* 4.0587
9	* 1.4207	* 1.5562	* 1.7588	* 1.7404	* 1.7892	* 1.6440	* 1.6591	* .9840
	* 2.2918	* 2.0916	* 1.8488	* 1.8664	* 1.8177	* 1.9757	* 1.9621	* 3.3060
10	* 1.6429	* 1.7610	* 1.7307	* 1.8044	* 1.6808	* 1.5410	* 1.6852	* .8670
	* 1.9769	* 1.8466	* 1.8843	* 1.8083	* 1.9451	* 2.1227	* 1.9403	* 3.7664
11	* 1.8152	* 1.7415	* 1.8076	* 1.7090	* 1.7599	* 1.6234	* 1.5551	* .7683
	* 1.7867	* 1.8653	* 1.8062	* 1.9177	* 1.8764	* 2.0373	* 2.1156	* 4.2686
12	* 1.7350	* 1.7903	* 1.6797	* 1.7588	* 1.7393	* 1.7383	* 1.0078	*
	* 1.8675	* 1.8167	* 1.9451	* 1.8764	* 1.9061	* 1.9072	* 3.2887	*
13	* 1.7523	* 1.6429	* 1.5410	* 1.6234	* 1.7383	* 1.6158	* .7900	*
	* 1.8477	* 1.9769	* 2.1227	* 2.0373	* 1.9072	* 2.0573	* 4.2169	*
14	* 1.4196	* 1.6602	* 1.6852	* 1.5551	* 1.0078	* .7911	*	*
	* 2.2751	* 1.9621	* 1.9391	* 2.1142	* 3.2887	* 4.2113	*	*
15	* .7933	* .9851	* .8670	* .7694	* F-SUB-Q			
	* 4.0587	* 3.3025	* 3.7664	* 4.2686	* M-SUB-Q			

AT 75% POWER, 200 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9493	* 1.4229	* 1.6494	* 1.8336	* 1.7469	* 1.7708	* 1.4272	* .7965
	* 3.3046	* 2.2130	* 1.9142	* 1.7267	* 1.8104	* 1.7826	* 2.1986	* 3.9120
9	* 1.4229	* 1.5616	* 1.7751	* 1.7502	* 1.8076	* 1.6526	* 1.6765	* .9894
	* 2.2130	* 2.0241	* 1.7857	* 1.8104	* 1.7567	* 1.9166	* 1.8913	* 3.1678
10	* 1.6494	* 1.7784	* 1.7415	* 1.8250	* 1.6895	* 1.5486	* 1.7047	* .8735
	* 1.9142	* 1.7826	* 1.8294	* 1.7518	* 1.8903	* 2.0606	* 1.8693	* 3.6004
11	* 1.8336	* 1.7513	* 1.8271	* 1.7209	* 1.7827	* 1.6396	* 1.5735	* .7738
	* 1.7267	* 1.8083	* 1.7498	* 1.8669	* 1.8212	* 1.9774	* 2.0351	* 4.0739
12	* 1.7469	* 1.8087	* 1.6884	* 1.7827	* 1.7567	* 1.7621	* 1.0176	*
	* 1.8104	* 1.7557	* 1.8925	* 1.8212	* 1.8653	* 1.8478	* 3.1532	*
13	* 1.7708	* 1.6516	* 1.5486	* 1.6396	* 1.7621	* 1.6418	* .7987	*
	* 1.7826	* 1.9177	* 2.0581	* 1.9774	* 1.8478	* 1.9859	* 4.0172	*
14	* 1.4272	* 1.6765	* 1.7047	* 1.5735	* 1.0176	* .7998	*	*
	* 2.1986	* 1.8913	* 1.8702	* 2.0362	* 3.1532	* 4.0121	*	*
15	* .7965	* .9905	* .8735	* .7738	* F-SUB-Q			
	* 3.9120	* 3.1614	* 3.6004	* 4.0686	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 92 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 200 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9352	* 1.4066	* 1.6353	* 1.8271	* 1.7350	* 1.7653	* 1.4164	* .7878
	* 3.0556	* 2.0422	* 1.7675	* 1.5894	* 1.6720	* 1.6419	* 2.0291	* 3.6054
9	* 1.4066	* 1.5464	* 1.7686	* 1.7372	* 1.8022	* 1.6407	* 1.6721	* .9807
	* 2.0422	* 1.8653	* 1.6413	* 1.6700	* 1.6143	* 1.7663	* 1.7330	* 2.9196
10	* 1.6353	* 1.7718	* 1.7296	* 1.8184	* 1.6765	* 1.5356	* 1.7025	* .8670
	* 1.7675	* 1.6371	* 1.6826	* 1.6039	* 1.7378	* 1.8949	* 1.7088	* 3.3128
11	* 1.8271	* 1.7383	* 1.8217	* 1.7079	* 1.7805	* 1.6331	* 1.5703	* .7683
	* 1.5894	* 1.6695	* 1.6014	* 1.7124	* 1.6617	* 1.8092	* 1.8577	* 3.7475
12	* 1.7350	* 1.8022	* 1.6754	* 1.7805	* 1.7502	* 1.7621	* 1.0122	*
	* 1.6720	* 1.6134	* 1.7387	* 1.6609	* 1.7071	* 1.6864	* 2.8923	*
13	* 1.7653	* 1.6396	* 1.5356	* 1.6342	* 1.7621	* 1.6440	* .7954	*
	* 1.6419	* 1.7673	* 1.8949	* 1.8101	* 1.6864	* 1.8140	* 3.6810	*
14	* 1.4164	* 1.6721	* 1.7025	* 1.5714	* 1.0122	* .7954	*	*
	* 2.0291	* 1.7338	* 1.7088	* 1.8577	* 2.8923	* 3.6847	*	*
15	* .7878	* .9829	* .8680	* .7683	* F-SUB-Q			
	* 3.6054	* 2.9141	* 3.3063	* 3.7430	* M-SUB-Q			

AT 75% POWER, 200 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9201	* 1.3850	* 1.6125	* 1.8054	* 1.7144	* 1.7448	* 1.3980	* .7770
	* 2.8583	* 1.9057	* 1.6455	* 1.4749	* 1.5523	* 1.5242	* 1.8871	* 3.3664
9	* 1.3850	* 1.5237	* 1.7458	* 1.7144	* 1.7805	* 1.6201	* 1.6537	* .9677
	* 1.9057	* 1.7401	* 1.5273	* 1.5532	* 1.5010	* 1.6415	* 1.6098	* 2.7230
10	* 1.6125	* 1.7491	* 1.7079	* 1.7979	* 1.6548	* 1.5172	* 1.6852	* .8561
	* 1.6455	* 1.5251	* 1.5676	* 1.4926	* 1.6190	* 1.7640	* 1.5890	* 3.0920
11	* 1.8054	* 1.7166	* 1.7989	* 1.6873	* 1.7632	* 1.6169	* 1.5551	* .7575
	* 1.4749	* 1.5517	* 1.4905	* 1.5931	* 1.5401	* 1.6769	* 1.7259	* 3.4966
12	* 1.7144	* 1.7816	* 1.6537	* 1.7621	* 1.7328	* 1.7458	* 1.0013	*
	* 1.5523	* 1.5003	* 1.6199	* 1.5401	* 1.5805	* 1.5604	* 2.6843	*
13	* 1.7448	* 1.6190	* 1.5172	* 1.6180	* 1.7469	* 1.6310	* .7857	*
	* 1.5242	* 1.6424	* 1.7640	* 1.6769	* 1.5604	* 1.6749	* 3.4231	*
14	* 1.3980	* 1.6548	* 1.6862	* 1.5551	* 1.0013	* .7868	*	*
	* 1.8871	* 1.6098	* 1.5882	* 1.7259	* 2.6863	* 3.4231	*	*
15	* .7770	* .9699	* .8561	* .7586	* F-SUB-Q			
	* 3.3664	* 2.7150	* 3.0915	* 3.4966	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 93 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 200 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9006	* 1.3579	* 1.5811	* 1.7621	* 1.6819	* 1.7047	* 1.3730	* .7618
	* 2.6986	* 1.7956	* 1.5492	* 1.3964	* 1.4612	* 1.4434	* 1.7796	* 3.1808
9	* 1.3579	* 1.4933	* 1.7047	* 1.6819	* 1.7383	* 1.5898	* 1.6190	* .9493
	* 1.7956	* 1.6383	* 1.4439	* 1.4622	* 1.4194	* 1.5458	* 1.5198	* 2.5695
10	* 1.5811	* 1.7079	* 1.6754	* 1.7545	* 1.6234	* 1.4912	* 1.6505	* .8399
	* 1.5492	* 1.4422	* 1.4764	* 1.4152	* 1.5281	* 1.6640	* 1.5026	* 2.9166
11	* 1.7621	* 1.6841	* 1.7567	* 1.6548	* 1.7242	* 1.5909	* 1.5237	* .7434
	* 1.3964	* 1.4609	* 1.4133	* 1.5046	* 1.4581	* 1.5790	* 1.6353	* 3.3144
12	* 1.6819	* 1.7393	* 1.6223	* 1.7242	* 1.7036	* 1.7122	* .9840	*
	* 1.4612	* 1.4182	* 1.5288	* 1.4576	* 1.4872	* 1.4728	* 2.5357	*
13	* 1.7047	* 1.5887	* 1.4912	* 1.5909	* 1.7122	* 1.5995	* .7716	*
	* 1.4434	* 1.5465	* 1.6640	* 1.5775	* 1.4728	* 1.5780	* 3.2291	*
14	* 1.3730	* 1.6201	* 1.6516	* 1.5237	* .9840	* .7716	*	*
	* 1.7796	* 1.5198	* 1.5015	* 1.6348	* 2.5319	* 3.2319	*	*
15	* .7618	* .9515	* .8399	* .7434	* F-SUB-Q			
	* 3.1808	* 2.5632	* 2.9166	* 3.3088	* M-SUB-Q			

AT 75% POWER, 200 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8908	* 1.3438	* 1.5649	* 1.7556	* 1.6689	* 1.7003	* 1.3622	* .7532
	* 2.5349	* 1.6892	* 1.4592	* 1.3077	* 1.3748	* 1.3510	* 1.6764	* 3.0118
9	* 1.3438	* 1.4782	* 1.6971	* 1.6667	* 1.7328	* 1.5779	* 1.6180	* .9407
	* 1.6892	* 1.5419	* 1.3523	* 1.3764	* 1.3281	* 1.4534	* 1.4198	* 2.4244
10	* 1.5649	* 1.7003	* 1.6602	* 1.7480	* 1.6093	* 1.4803	* 1.6516	* .8334
	* 1.4592	* 1.3499	* 1.3868	* 1.3215	* 1.4338	* 1.5611	* 1.3982	* 2.7437
11	* 1.7556	* 1.6689	* 1.7502	* 1.6407	* 1.7220	* 1.5844	* 1.5237	* .7369
	* 1.3077	* 1.3752	* 1.3199	* 1.4118	* 1.3616	* 1.4798	* 1.5229	* 3.1165
12	* 1.6689	* 1.7339	* 1.6082	* 1.7209	* 1.6960	* 1.7133	* .9775	*
	* 1.3748	* 1.3269	* 1.4342	* 1.3625	* 1.3906	* 1.3743	* 2.3852	*
13	* 1.7003	* 1.5768	* 1.4803	* 1.5855	* 1.7133	* 1.6028	* .7662	*
	* 1.3510	* 1.4541	* 1.5611	* 1.4791	* 1.3743	* 1.4713	* 3.0439	*
14	* 1.3622	* 1.6190	* 1.6526	* 1.5248	* .9775	* .7673	*	*
	* 1.6764	* 1.4198	* 1.3976	* 1.5232	* 2.3852	* 3.0431	*	*
15	* .7532	* .9428	* .8334	* .7369	* F-SUB-Q			
	* 3.0118	* 2.4188	* 2.7403	* 3.1134	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 94 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 200 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8691	* 1.3124	* 1.5248	* 1.7068	* 1.6277	* 1.6537	* 1.3297	* .7326
	* 2.4453	* 1.6304	* 1.4128	* 1.2691	* 1.3295	* 1.3104	* 1.6222	* 2.9267
9	* 1.3124	* 1.4413	* 1.6505	* 1.6245	* 1.6841	* 1.5399	* 1.5811	* .9157
	* 1.6304	* 1.4915	* 1.3111	* 1.3315	* 1.2883	* 1.4048	* 1.3707	* 2.3511
10	* 1.5248	* 1.6526	* 1.6169	* 1.6971	* 1.5692	* 1.4478	* 1.6136	* .8117
	* 1.4128	* 1.3089	* 1.3417	* 1.2811	* 1.3838	* 1.5029	* 1.3477	* 2.6566
11	* 1.7068	* 1.6266	* 1.6992	* 1.5985	* 1.6765	* 1.5508	* 1.4901	* .7174
	* 1.2691	* 1.3303	* 1.2796	* 1.3621	* 1.3101	* 1.4173	* 1.4644	* 3.0180
12	* 1.6277	* 1.6852	* 1.5681	* 1.6765	* 1.6591	* 1.6743	* .9547	*
	* 1.3295	* 1.2870	* 1.3853	* 1.3109	* 1.3283	* 1.3173	* 2.2931	*
13	* 1.6537	* 1.5399	* 1.4478	* 1.5519	* 1.6743	* 1.5681	* .7478	*
	* 1.3104	* 1.4054	* 1.5029	* 1.4166	* 1.3165	* 1.4118	* 2.9324	*
14	* 1.3297	* 1.5811	* 1.6147	* 1.4901	* .9547	* .7488	*	*
	* 1.6222	* 1.3710	* 1.3471	* 1.4647	* 2.2914	* 2.9296	*	*
15	* .7326	* .9179	* .8128	* .7174	* F-SUB-Q			
	* 2.9267	* 2.3458	* 2.6543	* 3.0139	* M-SUB-Q			

AT 75% POWER, 200 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8312	* 1.2538	* 1.4489	* 1.6050	* 1.5475	* 1.5529	* 1.2658	* .6979
	* 2.4396	* 1.6247	* 1.4159	* 1.2855	* 1.3318	* 1.3286	* 1.6253	* 2.9399
9	* 1.2538	* 1.3709	* 1.5497	* 1.5432	* 1.5800	* 1.4673	* 1.4966	* .8691
	* 1.6247	* 1.4935	* 1.3291	* 1.3352	* 1.3068	* 1.4048	* 1.3811	* 2.3660
10	* 1.4489	* 1.5529	* 1.5356	* 1.5909	* 1.4923	* 1.3839	* 1.5226	* .7705
	* 1.4159	* 1.3268	* 1.3443	* 1.3012	* 1.3838	* 1.4946	* 1.3601	* 2.6720
11	* 1.6050	* 1.5454	* 1.5920	* 1.5193	* 1.5757	* 1.4793	* 1.4088	* .6806
	* 1.2855	* 1.3335	* 1.2988	* 1.3629	* 1.3220	* 1.4083	* 1.4736	* 3.0333
12	* 1.5475	* 1.5811	* 1.4923	* 1.5757	* 1.5811	* 1.5833	* .9092	*
	* 1.3318	* 1.3065	* 1.3844	* 1.3226	* 1.3201	* 1.3188	* 2.2840	*
13	* 1.5529	* 1.4662	* 1.3850	* 1.4803	* 1.5844	* 1.4836	* .7109	*
	* 1.3286	* 1.4054	* 1.4936	* 1.4083	* 1.3188	* 1.4124	* 2.9287	*
14	* 1.2658	* 1.4966	* 1.5226	* 1.4088	* .9103	* .7109	*	*
	* 1.6253	* 1.3805	* 1.3595	* 1.4727	* 2.2847	* 2.9248	*	*
15	* .6979	* .8713	* .7705	* .6806	* F-SUB-Q			
	* 2.9399	* 2.3599	* 2.6720	* 3.0291	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 95 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 200 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7965	* 1.1975	* 1.3730	* 1.5096	* 1.4695	* 1.4630	* 1.2018	* .6611
	* 2.4526	* 1.6388	* 1.4384	* 1.3149	* 1.3491	* 1.3575	* 1.6508	* 2.9918
9	* 1.1975	* 1.3015	* 1.4565	* 1.4630	* 1.4868	* 1.3958	* 1.4153	* .8204
	* 1.6388	* 1.5137	* 1.3605	* 1.3544	* 1.3352	* 1.4218	* 1.4056	* 2.4198
10	* 1.3730	* 1.4597	* 1.4532	* 1.4901	* 1.4164	* 1.3210	* 1.4337	* .7272
	* 1.4384	* 1.3573	* 1.3646	* 1.3350	* 1.4024	* 1.5062	* 1.3902	* 2.7265
11	* 1.5096	* 1.4652	* 1.4923	* 1.4381	* 1.4847	* 1.4099	* 1.3319	* .6405
	* 1.3149	* 1.3526	* 1.3317	* 1.3826	* 1.3493	* 1.4185	* 1.4993	* 3.1020
12	* 1.4695	* 1.4879	* 1.4153	* 1.4847	* 1.5053	* 1.4988	* .8648	*
	* 1.3491	* 1.3349	* 1.4030	* 1.3493	* 1.3301	* 1.3365	* 2.3093	*
13	* 1.4630	* 1.3947	* 1.3210	* 1.4099	* 1.4998	* 1.4034	* .6741	*
	* 1.3575	* 1.4225	* 1.5055	* 1.4179	* 1.3368	* 1.4330	* 2.9672	*
14	* 1.2018	* 1.4164	* 1.4337	* 1.3319	* .8648	* .6751	*	*
	* 1.6508	* 1.4056	* 1.3896	* 1.4983	* 2.3101	* 2.9644	*	*
15	* .6611	* .8214	* .7282	* .6416	* F-SUB-Q			
	* 2.9918	* 2.4134	* 2.7275	* 3.0989	* M-SUB-Q			

AT 75% POWER, 200 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7228	* 1.0783	* 1.2300	* 1.3319	* 1.3232	* 1.2874	* 1.0783	* .5917
	* 2.6242	* 1.7696	* 1.5599	* 1.4469	* 1.4539	* 1.4974	* 1.7891	* 3.2560
9	* 1.0783	* 1.1671	* 1.2809	* 1.3113	* 1.3124	* 1.2549	* 1.2452	* .7239
	* 1.7696	* 1.6403	* 1.5011	* 1.4664	* 1.4697	* 1.5367	* 1.5527	* 2.6687
10	* 1.2300	* 1.2842	* 1.3015	* 1.3091	* 1.2690	* 1.1856	* 1.2387	* .6416
	* 1.5599	* 1.4979	* 1.4784	* 1.4736	* 1.5195	* 1.6301	* 1.5639	* 3.0128
11	* 1.3319	* 1.3124	* 1.3113	* 1.2864	* 1.3091	* 1.2668	* 1.1639	* .5646
	* 1.4469	* 1.4650	* 1.4708	* 1.4998	* 1.4836	* 1.5309	* 1.6673	* 3.4270
12	* 1.3232	* 1.3134	* 1.2679	* 1.3091	* 1.3525	* 1.3221	* .7748	*
	* 1.4539	* 1.4683	* 1.5202	* 1.4836	* 1.4336	* 1.4708	* 2.5046	*
13	* 1.2874	* 1.2538	* 1.1856	* 1.2668	* 1.3221	* 1.2289	* .6015	*
	* 1.4974	* 1.5374	* 1.6292	* 1.5312	* 1.4708	* 1.5860	* 3.2350	*
14	* 1.0783	* 1.2452	* 1.2398	* 1.1639	* .7748	* .6015	*	*
	* 1.7891	* 1.5527	* 1.5631	* 1.6664	* 2.5046	* 3.2316	*	*
15	* .5917	* .7250	* .6416	* .5646	* F-SUB-Q			
	* 3.2560	* 2.6642	* 3.0128	* 3.4286	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 96 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 200 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .5950 *	* .8160 *	* .9363 *	* 1.0870 *	* 1.0599 *	* 1.0393 *	* .8583 *	* .4757 *
	* 3.1306 *	* 2.2941 *	* 2.0052 *	* 1.7326 *	* 1.7749 *	* 1.8155 *	* 2.1997 *	* 3.9761 *
9	* .8160 *	* .8941 *	* 1.0469 *	* 1.0003 *	* 1.0772 *	* .9764 *	* .9612 *	* .5592 *
	* 2.2941 *	* 2.0954 *	* 1.7971 *	* 1.8786 *	* 1.7489 *	* 1.9322 *	* 1.9692 *	* 3.3890 *
10	* .9363 *	* 1.0490 *	* .9970 *	* 1.0707 *	* .9656 *	* .8919 *	* .9287 *	* .5018 *
	* 2.0052 *	* 1.7925 *	* 1.8859 *	* 1.7597 *	* 1.9527 *	* 2.1198 *	* 2.0403 *	* 3.7793 *
11	* 1.0870 *	* 1.0013 *	* 1.0729 *	* .9786 *	* 1.0707 *	* 1.0046 *	* .9006 *	* .4454 *
	* 1.7326 *	* 1.8759 *	* 1.7553 *	* 1.9284 *	* 1.7705 *	* 1.8891 *	* 2.1082 *	* 4.2596 *
12	* 1.0599 *	* 1.0783 *	* .9645 *	* 1.0707 *	* 1.0761 *	* 1.0328 *	* .6220 *	
	* 1.7749 *	* 1.7479 *	* 1.9539 *	* 1.7705 *	* 1.7631 *	* 1.8398 *	* 3.0519 *	
13	* 1.0393 *	* .9753 *	* .8919 *	* 1.0057 *	* 1.0328 *	* .9407 *	* .4790 *	
	* 1.8155 *	* 1.9334 *	* 2.1204 *	* 1.8875 *	* 1.8398 *	* 2.0255 *	* 3.9740 *	
14	* .8583 *	* .9612 *	* .9287 *	* .9016 *	* .6220 *	* .4801 *		
	* 2.1997 *	* 1.9675 *	* 2.0409 *	* 2.1082 *	* 3.0531 *	* 3.9669 *		
15	* .4757 *	* .5603 *	* .5018 *	* .4454 *	F-SUB-Q			
	* 3.9761 *	* 3.3817 *	* 3.7748 *	* 4.2596 *	M-SUB-Q			

AT 75% POWER, 200 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .4042 *	* .3652 *	* .4237 *	* .4942 *	* .4552 *	* .4692 *	* .3804 *	* .2308 *
	* 4.5555 *	* 5.0296 *	* 4.3406 *	* 3.7365 *	* 4.0571 *	* 3.9428 *	* 4.8778 *	* 8.0690 *
9	* .3652 *	* .4161 *	* .4768 *	* .4443 *	* .4887 *	* .4313 *	* .3977 *	* .2482 *
	* 5.0296 *	* 4.4253 *	* 3.8666 *	* 4.1607 *	* 3.7744 *	* 4.2931 *	* 4.6656 *	* 7.4969 *
10	* .4237 *	* .4768 *	* .4389 *	* .4866 *	* .4313 *	* .3858 *	* .3869 *	* .2460 *
	* 4.3406 *	* 3.8619 *	* 4.2109 *	* 3.7991 *	* 4.2765 *	* 4.8117 *	* 4.8031 *	* 7.5769 *
11	* .4942 *	* .4443 *	* .4866 *	* .4356 *	* .4833 *	* .4248 *	* .3620 *	* .2135 *
	* 3.7365 *	* 4.1529 *	* 3.7945 *	* 4.2418 *	* 3.8410 *	* 4.3820 *	* 5.1472 *	* 8.7255 *
12	* .4552 *	* .4898 *	* .4324 *	* .4833 *	* .4552 *	* .4313 *	* .3067 *	
	* 4.0571 *	* 3.7698 *	* 4.2789 *	* 3.8410 *	* 4.0782 *	* 4.3251 *	* 6.0978 *	
13	* .4692 *	* .4313 *	* .3858 *	* .4248 *	* .4313 *	* .3825 *	* .2341 *	
	* 3.9428 *	* 4.2931 *	* 4.8148 *	* 4.3820 *	* 4.3251 *	* 4.8854 *	* 7.9987 *	
14	* .3804 *	* .3977 *	* .3869 *	* .3620 *	* .3067 *	* .2341 *		
	* 4.8778 *	* 4.6656 *	* 4.8031 *	* 5.1508 *	* 6.0978 *	* 7.9987 *		
15	* .2308 *	* .2482 *	* .2460 *	* .2135 *	F-SUB-Q			
	* 8.0690 *	* 7.5044 *	* 7.5769 *	* 8.7255 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 97 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 300 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .4812 *	* .4974 *	* .5603 *	* .6112 *	* .5863 *	* .5884 *	* .5050 *	* .3338 *
	* 3.7661 *	* 4.1073 *	* 3.6398 *	* 3.2364 *	* 3.4695 *	* 3.3462 *	* 4.0018 *	* 5.9845 *
9	* .4974 *	* .5462 *	* .5928 *	* .5754 *	* .6047 *	* .5614 *	* .5126 *	* .3533 *
	* 4.1073 *	* 3.7289 *	* 3.3361 *	* 3.5351 *	* 3.2663 *	* 3.6146 *	* 3.8237 *	* 5.6561 *
10	* .5603 *	* .5928 *	* .5624 *	* .5906 *	* .5538 *	* .5115 *	* .4898 *	* .3446 *
	* 3.6398 *	* 3.3343 *	* 3.6166 *	* 3.3400 *	* 3.6693 *	* 3.9553 *	* 3.9859 *	* 5.7975 *
11	* .6112 *	* .5754 *	* .5917 *	* .5408 *	* .5115 *	* .4692 *	* .4259 *	* .2883 *
	* 3.2364 *	* 3.5351 *	* 3.3361 *	* 3.7551 *	* 3.6637 *	* 4.1362 *	* 4.5376 *	* 6.8764 *
12	* .5863 *	* .6047 *	* .5538 *	* .5115 *	* .4096 *	* .3717 *	* .3349 *	
	* 3.4695 *	* 3.2663 *	* 3.6673 *	* 3.6637 *	* 3.8408 *	* 4.0491 *	* 5.4511 *	
13	* .5884 *	* .5614 *	* .5115 *	* .4692 *	* .3717 *	* .3186 *	* .2395 *	
	* 3.3462 *	* 3.6146 *	* 3.9553 *	* 4.1362 *	* 4.0491 *	* 4.4821 *	* 6.8790 *	
14	* .5050 *	* .5126 *	* .4898 *	* .4259 *	* .3349 *	* .2395 *		
	* 4.0018 *	* 3.8237 *	* 3.9859 *	* 4.5376 *	* 5.4511 *	* 6.8790 *		
15	* .3338 *	* .3544 *	* .3446 *	* .2883 *	F-SUB-Q			
	* 5.9845 *	* 5.6561 *	* 5.7975 *	* 6.8704 *	M-SUB-Q			

AT 75% POWER, 300 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6329 *	* 1.0425 *	* 1.1791 *	* 1.1585 *	* 1.2202 *	* 1.1303 *	* 1.0425 *	* .6275 *
	* 2.8358 *	* 2.0163 *	* 1.7809 *	* 1.7561 *	* 1.7169 *	* 1.7957 *	* 1.9955 *	* 3.2882 *
9	* 1.0425 *	* 1.1238 *	* 1.1292 *	* 1.2235 *	* 1.1444 *	* 1.1845 *	* 1.0967 *	* .7337 *
	* 2.0163 *	* 1.8695 *	* 1.8031 *	* 1.7133 *	* 1.7754 *	* 1.7637 *	* 1.8424 *	* 2.8107 *
10	* 1.1791 *	* 1.1303 *	* 1.1942 *	* 1.1238 *	* 1.1661 *	* 1.1065 *	* 1.0544 *	* .6394 *
	* 1.7809 *	* 1.8020 *	* 1.7551 *	* 1.8071 *	* 1.7912 *	* 1.8796 *	* 1.9082 *	* 3.2227 *
11	* 1.1585 *	* 1.2246 *	* 1.1249 *	* 1.1260 *	* 1.0057 *	* .9905 *	* .9363 *	* .5440 *
	* 1.7561 *	* 1.7129 *	* 1.8059 *	* 1.8538 *	* 1.9674 *	* 1.9880 *	* 2.1317 *	* 3.7506 *
12	* 1.2202 *	* 1.1444 *	* 1.1661 *	* 1.0057 *	* .8323 *	* .8182 *	* .6210 *	
	* 1.7169 *	* 1.7742 *	* 1.7912 *	* 1.9674 *	* 1.8460 *	* 1.9470 *	* 3.0032 *	
13	* 1.1303 *	* 1.1845 *	* 1.1065 *	* .9905 *	* .8182 *	* .7066 *	* .4508 *	
	* 1.7957 *	* 1.7637 *	* 1.8796 *	* 1.9875 *	* 1.9470 *	* 2.1073 *	* 3.7472 *	
14	* 1.0425 *	* 1.0967 *	* 1.0544 *	* .9363 *	* .6210 *	* .4508 *		
	* 1.9955 *	* 1.8424 *	* 1.9082 *	* 2.1317 *	* 3.0032 *	* 3.7472 *		
15	* .6275 *	* .7347 *	* .6394 *	* .5440 *	F-SUB-Q			
	* 3.2882 *	* 2.8080 *	* 3.2207 *	* 3.7506 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 98 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 300 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7434	* 1.2289	* 1.4110	* 1.4467	* 1.4608	* 1.4196	* 1.2473	* .7434
	* 2.5519	* 1.7508	* 1.5215	* 1.4357	* 1.4645	* 1.4583	* 1.7044	* 2.8368
9	* 1.2289	* 1.3373	* 1.4056	* 1.4706	* 1.4261	* 1.4175	* 1.3557	* .8854
	* 1.7508	* 1.6052	* 1.4785	* 1.4561	* 1.4512	* 1.5045	* 1.5212	* 2.3808
10	* 1.4110	* 1.4066	* 1.4348	* 1.4012	* 1.3969	* 1.3167	* 1.3275	* .7651
	* 1.5215	* 1.4777	* 1.4932	* 1.4791	* 1.5252	* 1.6089	* 1.5415	* 2.7493
11	* 1.4467	* 1.4717	* 1.4023	* 1.3546	* 1.2538	* 1.1845	* 1.1747	* .6546
	* 1.4357	* 1.4554	* 1.4784	* 1.5765	* 1.5971	* 1.6787	* 1.7344	* 3.1863
12	* 1.4608	* 1.4272	* 1.3969	* 1.2538	* 1.0230	* 1.0198	* .7413	*
	* 1.4645	* 1.4507	* 1.5255	* 1.5971	* 1.5716	* 1.5878	* 2.5676	*
13	* 1.4196	* 1.4175	* 1.3167	* 1.1856	* 1.0198	* .8973	* .5408	*
	* 1.4583	* 1.5050	* 1.6089	* 1.6783	* 1.5872	* 1.7058	* 3.1973	*
14	* 1.2473	* 1.3557	* 1.3275	* 1.1747	* .7413	* .5408	*	*
	* 1.7044	* 1.5212	* 1.5415	* 1.7340	* 2.5676	* 3.1973	*	*
15	* .7434	* .8865	* .7662	* .6546	* F-SUB-Q			
	* 2.8368	* 2.3789	* 2.7493	* 3.1841	* M-SUB-Q			

AT 75% POWER, 300 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7954	* 1.3232	* 1.5519	* 1.6624	* 1.6169	* 1.6299	* 1.3730	* .8084
	* 2.4887	* 1.6633	* 1.4120	* 1.2722	* 1.3508	* 1.2925	* 1.5807	* 2.6657
9	* 1.3232	* 1.4630	* 1.6050	* 1.6266	* 1.6364	* 1.5605	* 1.5324	* .9764
	* 1.6633	* 1.5004	* 1.3198	* 1.3440	* 1.2889	* 1.3944	* 1.3675	* 2.2039
10	* 1.5519	* 1.6060	* 1.5865	* 1.6060	* 1.5378	* 1.4316	* 1.5107	* .8431
	* 1.4120	* 1.3186	* 1.3802	* 1.3154	* 1.4156	* 1.5131	* 1.3809	* 2.5517
11	* 1.6624	* 1.6277	* 1.6071	* 1.4988	* 1.4272	* 1.2994	* 1.3308	* .7228
	* 1.2722	* 1.3430	* 1.3142	* 1.4548	* 1.4143	* 1.5509	* 1.5597	* 2.9492
12	* 1.6169	* 1.6375	* 1.5367	* 1.4261	* 1.1466	* 1.1596	* .8160	*
	* 1.3508	* 1.2883	* 1.4161	* 1.4143	* 1.4491	* 1.4234	* 2.3916	*
13	* 1.6299	* 1.5594	* 1.4316	* 1.3004	* 1.1596	* 1.0338	* .5982	*
	* 1.2925	* 1.3950	* 1.5131	* 1.5509	* 1.4234	* 1.5205	* 2.9727	*
14	* 1.3730	* 1.5324	* 1.5107	* 1.3308	* .8160	* .5982	*	*
	* 1.5807	* 1.3675	* 1.3802	* 1.5597	* 2.3916	* 2.9727	*	*
15	* .8084	* .9775	* .8431	* .7228	* F-SUB-Q			
	* 2.6657	* 2.2006	* 2.5517	* 2.9465	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 99 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 300 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7976	* 1.3340	* 1.5898	* 1.7458	* 1.6667	* 1.7068	* 1.4066	* .8225
	* 2.5673	* 1.6959	* 1.4162	* 1.2418	* 1.3450	* 1.2650	* 1.5834	* 2.6910
9	* 1.3340	* 1.4923	* 1.6797	* 1.6732	* 1.7177	* 1.5995	* 1.5941	* .9981
	* 1.6959	* 1.5123	* 1.2925	* 1.3419	* 1.2584	* 1.3956	* 1.3480	* 2.2122
10	* 1.5898	* 1.6808	* 1.6331	* 1.6873	* 1.5768	* 1.4554	* 1.5724	* .8626
	* 1.4162	* 1.2909	* 1.3768	* 1.2837	* 1.4174	* 1.5261	* 1.3550	* 2.5543
11	* 1.7458	* 1.6743	* 1.6884	* 1.5432	* 1.4912	* 1.3330	* 1.3828	* .7423
	* 1.2418	* 1.3409	* 1.2826	* 1.4538	* 1.3798	* 1.5485	* 1.5368	* 2.9421
12	* 1.6667	* 1.7177	* 1.5757	* 1.4901	* 1.1899	* 1.2116	* .8377	*
	* 1.3450	* 1.2579	* 1.4181	* 1.3798	* 1.4435	* 1.3984	* 2.4027	*
13	* 1.7068	* 1.5985	* 1.4554	* 1.3330	* 1.2116	* 1.0935	* .6166	*
	* 1.2650	* 1.3963	* 1.5261	* 1.5482	* 1.3984	* 1.4889	* 2.9844	*
14	* 1.4066	* 1.5941	* 1.5724	* 1.3828	* .8377	* .6166	*	*
	* 1.5834	* 1.3480	* 1.3550	* 1.5368	* 2.4027	* 2.9844	*	*
15	* .8225	* 1.0003	* .8626	* .7423	* F-SUB-Q			
	* 2.6910	* 2.2089	* 2.5523	* 2.9421	* M-SUB-Q			

AT 75% POWER, 300 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7878	* 1.3210	* 1.5887	* 1.7675	* 1.6721	* 1.7242	* 1.4034	* .8182
	* 2.6734	* 1.7668	* 1.4605	* 1.2579	* 1.3769	* 1.2823	* 1.6264	* 2.7728
9	* 1.3210	* 1.4868	* 1.6992	* 1.6776	* 1.7383	* 1.5985	* 1.6039	* .9959
	* 1.7668	* 1.5664	* 1.3135	* 1.3768	* 1.2755	* 1.4357	* 1.3717	* 2.2763
10	* 1.5887	* 1.7014	* 1.6375	* 1.7101	* 1.5779	* 1.4467	* 1.5844	* .8615
	* 1.4605	* 1.3117	* 1.4149	* 1.3018	* 1.4614	* 1.5847	* 1.3836	* 2.6330
11	* 1.7675	* 1.6787	* 1.7122	* 1.5508	* 1.5096	* 1.3373	* 1.3936	* .7434
	* 1.2579	* 1.3756	* 1.3007	* 1.4947	* 1.4017	* 1.5978	* 1.5795	* 3.0409
12	* 1.6721	* 1.7383	* 1.5768	* 1.5096	* 1.2029	* 1.2322	* .8431	*
	* 1.3769	* 1.2750	* 1.4621	* 1.4017	* 1.4870	* 1.4311	* 2.4855	*
13	* 1.7242	* 1.5974	* 1.4467	* 1.3373	* 1.2322	* 1.1195	* .6253	*
	* 1.2823	* 1.4363	* 1.5847	* 1.5976	* 1.4310	* 1.5236	* 3.0957	*
14	* 1.4034	* 1.6039	* 1.5844	* 1.3936	* .8431	* .6253	*	*
	* 1.6264	* 1.3717	* 1.3836	* 1.5787	* 2.4855	* 3.0938	*	*
15	* .8182	* .9970	* .8615	* .7445	* F-SUB-Q			
	* 2.7728	* 2.2729	* 2.6329	* 3.0408	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 100 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 300 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7868	* 1.3178	* 1.5898	* 1.7827	* 1.6776	* 1.7350	* 1.4034	* .8171
	* 2.7602	* 1.8487	* 1.5200	* 1.2939	* 1.4288	* 1.3208	* 1.6889	* 2.8821
9	* 1.3178	* 1.4858	* 1.7155	* 1.6819	* 1.7534	* 1.5974	* 1.6125	* .9959
	* 1.8487	* 1.6326	* 1.3519	* 1.4308	* 1.3131	* 1.4941	* 1.4155	* 2.3650
10	* 1.5898	* 1.7177	* 1.6461	* 1.7307	* 1.5822	* 1.4457	* 1.5963	* .8626
	* 1.5200	* 1.3501	* 1.4695	* 1.3402	* 1.5248	* 1.6595	* 1.4323	* 2.7372
11	* 1.7827	* 1.6830	* 1.7318	* 1.5627	* 1.5313	* 1.3514	* 1.4088	* .7488
	* 1.2939	* 1.4294	* 1.3384	* 1.5560	* 1.4338	* 1.6489	* 1.6396	* 3.1677
12	* 1.6776	* 1.7545	* 1.5811	* 1.5302	* 1.2278	* 1.2658	* .8583	*
	* 1.4288	* 1.3125	* 1.5248	* 1.4338	* 1.5329	* 1.4655	* 2.5645	*
13	* 1.7350	* 1.5963	* 1.4457	* 1.3514	* 1.2658	* 1.1606	* .6426	*
	* 1.3208	* 1.4948	* 1.6595	* 1.6480	* 1.4650	* 1.5604	* 3.1948	*
14	* 1.4034	* 1.6125	* 1.5963	* 1.4088	* .8583	* .6426	*	*
	* 1.6889	* 1.4155	* 1.4316	* 1.6386	* 2.5645	* 3.1925	*	*
15	* .8171	* .9970	* .8637	* .7488	F-SUB-Q			
	* 2.8821	* 2.3613	* 2.7347	* 3.1677	M-SUB-Q			

AT 75% POWER, 300 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7911	* 1.3037	* 1.5692	* 1.7773	* 1.6581	* 1.7253	* 1.3806	* .8019
	* 2.9215	* 1.9825	* 1.6239	* 1.3720	* 1.5230	* 1.4027	* 1.8020	* 3.0832
9	* 1.3037	* 1.4695	* 1.7122	* 1.6613	* 1.7480	* 1.5735	* 1.6006	* .9807
	* 1.9825	* 1.7462	* 1.4353	* 1.5268	* 1.3940	* 1.5962	* 1.5043	* 2.5242
10	* 1.5692	* 1.7144	* 1.6299	* 1.7318	* 1.5670	* 1.4261	* 1.5909	* .8529
	* 1.6239	* 1.4333	* 1.5675	* 1.4230	* 1.6319	* 1.7811	* 1.5239	* 2.9189
11	* 1.7773	* 1.6624	* 1.7328	* 1.5573	* 1.5454	* 1.3611	* 1.4131	* .7434
	* 1.3720	* 1.5253	* 1.4216	* 1.6350	* 1.4935	* 1.7271	* 1.7160	* 3.3909
12	* 1.6581	* 1.7491	* 1.5659	* 1.5443	* 1.2701	* 1.3156	* .8702	*
	* 1.5230	* 1.3934	* 1.6328	* 1.4935	* 1.6078	* 1.5341	* 2.6882	*
13	* 1.7253	* 1.5724	* 1.4261	* 1.3611	* 1.3156	* 1.2181	* .6600	*
	* 1.4027	* 1.5970	* 1.7811	* 1.7262	* 1.5339	* 1.6377	* 3.3632	*
14	* 1.3806	* 1.6006	* 1.5909	* 1.4142	* .8702	* .6600	*	*
	* 1.8020	* 1.5043	* 1.5231	* 1.7160	* 2.6882	* 3.3632	*	*
15	* .8019	* .9829	* .8540	* .7434	F-SUB-Q			
	* 3.0832	* 2.5220	* 2.9187	* 3.3909	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 101 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 300 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8453	* 1.3091	* 1.5584	* 1.7740	* 1.6451	* 1.7166	* 1.3665	* .7933
	* 3.1034	* 2.0956	* 1.7432	* 1.4766	* 1.6324	* 1.5103	* 1.9305	* 3.3005
9	* 1.3091	* 1.4641	* 1.7122	* 1.6483	* 1.7437	* 1.5594	* 1.5920	* .9732
	* 2.0956	* 1.8760	* 1.5452	* 1.6376	* 1.5004	* 1.7134	* 1.6191	* 2.7037
10	* 1.5584	* 1.7144	* 1.6245	* 1.7361	* 1.5627	* 1.4196	* 1.5909	* .8496
	* 1.7432	* 1.5436	* 1.6823	* 1.5334	* 1.7552	* 1.9185	* 1.6414	* 3.1264
11	* 1.7740	* 1.6494	* 1.7383	* 1.5670	* 1.5790	* 1.3915	* 1.4261	* .7445
	* 1.4766	* 1.6367	* 1.5318	* 1.7285	* 1.5802	* 1.8174	* 1.8203	* 3.6238
12	* 1.6451	* 1.7448	* 1.5627	* 1.5790	* 1.3969	* 1.4261	* .8962	*
	* 1.6324	* 1.4996	* 1.7561	* 1.5802	* 1.6926	* 1.6192	* 2.8256	*
13	* 1.7166	* 1.5584	* 1.4196	* 1.3915	* 1.4261	* 1.3113	* .6903	*
	* 1.5103	* 1.7134	* 1.9185	* 1.8163	* 1.6189	* 1.7265	* 3.5246	*
14	* 1.3665	* 1.5920	* 1.5909	* 1.4272	* .8962	* .6903	*	*
	* 1.9305	* 1.6191	* 1.6414	* 1.8203	* 2.8256	* 3.5246	*	*
15	* .7933	* .9742	* .8496	* .7445	* F-SUB-Q			
	* 3.3005	* 2.7013	* 3.1232	* 3.6238	* M-SUB-Q			

AT 75% POWER, 300 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8680	* 1.2961	* 1.5269	* 1.7339	* 1.6093	* 1.6743	* 1.3362	* .7759
	* 3.2925	* 2.2251	* 1.9005	* 1.6350	* 1.7895	* 1.6721	* 2.1135	* 3.6131
9	* 1.2961	* 1.4402	* 1.6776	* 1.6136	* 1.7057	* 1.5237	* 1.5551	* .9526
	* 2.2251	* 2.0081	* 1.6913	* 1.7977	* 1.6629	* 1.8798	* 1.7907	* 2.9605
10	* 1.5269	* 1.6797	* 1.5952	* 1.7068	* 1.5389	* 1.3958	* 1.5605	* .8344
	* 1.9005	* 1.6885	* 1.8082	* 1.6525	* 1.8672	* 2.0603	* 1.8100	* 3.4216
11	* 1.7339	* 1.6147	* 1.7079	* 1.5540	* 1.5952	* 1.4034	* 1.4131	* .7347
	* 1.6350	* 1.7966	* 1.6507	* 1.8329	* 1.7143	* 1.9621	* 1.9761	* 3.8878
12	* 1.6093	* 1.7057	* 1.5389	* 1.5941	* 1.4825	* 1.5020	* .9081	*
	* 1.7895	* 1.6620	* 1.8684	* 1.7143	* 1.8311	* 1.7648	* 3.0480	*
13	* 1.6743	* 1.5226	* 1.3958	* 1.4045	* 1.5020	* 1.3871	* .7087	*
	* 1.6721	* 1.8810	* 2.0603	* 1.9609	* 1.7648	* 1.8809	* 3.8016	*
14	* 1.3362	* 1.5551	* 1.5605	* 1.4131	* .9081	* .7098	*	*
	* 2.1135	* 1.7907	* 1.8100	* 1.9749	* 3.0480	* 3.7984	*	*
15	* .7759	* .9537	* .8344	* .7347	* F-SUB-Q			
	* 3.6131	* 2.9577	* 3.4216	* 3.8834	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 102 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 300 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8789	* 1.2983	* 1.5237	* 1.7448	* 1.6060	* 1.6830	* 1.3308	* .7716
	* 3.4042	* 2.3022	* 1.9596	* 1.6904	* 1.8600	* 1.7561	* 2.2522	* 3.8996
9	* 1.2983	* 1.4402	* 1.6917	* 1.6093	* 1.7166	* 1.5183	* 1.5638	* .9493
	* 2.3022	* 2.0734	* 1.7432	* 1.8544	* 1.7178	* 1.9696	* 1.8936	* 3.1650
10	* 1.5237	* 1.6938	* 1.5963	* 1.7253	* 1.5410	* 1.3958	* 1.5757	* .8355
	* 1.9596	* 1.7412	* 1.8689	* 1.7064	* 1.9340	* 2.1390	* 1.8740	* 3.5889
11	* 1.7448	* 1.6115	* 1.7274	* 1.5649	* 1.6396	* 1.4457	* 1.4359	* .7380
	* 1.6904	* 1.8533	* 1.7045	* 1.8974	* 1.7754	* 2.0300	* 2.0449	* 4.0521
12	* 1.6060	* 1.7177	* 1.5410	* 1.6396	* 1.5454	* 1.5703	* .9298	*
	* 1.8600	* 1.7168	* 1.9340	* 1.7754	* 1.8986	* 1.8381	* 3.1682	*
13	* 1.6830	* 1.5172	* 1.3958	* 1.4467	* 1.5703	* 1.4608	* .7337	*
	* 1.7561	* 1.9708	* 2.1390	* 2.0300	* 1.8381	* 1.9701	* 3.9846	*
14	* 1.3308	* 1.5638	* 1.5757	* 1.4370	* .9298	* .7337	*	*
	* 2.2522	* 1.8924	* 1.8740	* 2.0435	* 3.1682	* 3.9846	*	*
15	* .7716	* .9515	* .8366	* .7391	* F-SUB-Q			
	* 3.8996	* 3.1585	* 3.5889	* 4.0521	* M-SUB-Q			

AT 75% POWER, 300 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8724	* 1.2853	* 1.5085	* 1.7328	* 1.5898	* 1.6700	* 1.3167	* .7618
	* 3.5460	* 2.3948	* 2.0349	* 1.7611	* 1.9282	* 1.8304	* 2.3358	* 4.0461
9	* 1.2853	* 1.4272	* 1.6819	* 1.5941	* 1.7057	* 1.5020	* 1.5529	* .9407
	* 2.3948	* 2.1540	* 1.8176	* 1.9247	* 1.7915	* 2.0442	* 1.9743	* 3.2818
10	* 1.5085	* 1.6841	* 1.5844	* 1.7187	* 1.5302	* 1.3839	* 1.5692	* .8301
	* 2.0349	* 1.8155	* 1.9390	* 1.7792	* 2.0100	* 2.2261	* 1.9557	* 3.7233
11	* 1.7328	* 1.5952	* 1.7209	* 1.5584	* 1.6505	* 1.4565	* 1.4370	* .7347
	* 1.7611	* 1.9235	* 1.7772	* 1.9733	* 1.8611	* 2.1190	* 2.1397	* 4.2094
12	* 1.5898	* 1.7068	* 1.5291	* 1.6505	* 1.5605	* 1.5930	* .9352	*
	* 1.9282	* 1.7905	* 2.0100	* 1.8611	* 1.9833	* 1.9326	* 3.3061	*
13	* 1.6700	* 1.5020	* 1.3839	* 1.4565	* 1.5930	* 1.4868	* .7434	*
	* 1.8304	* 2.0455	* 2.2261	* 2.1190	* 1.9314	* 2.0728	* 4.1646	*
14	* 1.3167	* 1.5529	* 1.5692	* 1.4370	* .9363	* .7434	*	*
	* 2.3358	* 1.9730	* 1.9545	* 2.1382	* 3.3026	* 4.1646	*	*
15	* .7618	* .9417	* .8301	* .7358	* F-SUB-Q			
	* 4.0461	* 3.2784	* 3.7233	* 4.2038	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 103 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 300 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8583	* 1.2658	* 1.4858	* 1.7057	* 1.5659	* 1.6418	* 1.2961	* .7499
	* 3.7041	* 2.5019	* 2.1227	* 1.8455	* 2.0060	* 1.9096	* 2.4134	* 4.1721
9	* 1.2658	* 1.4056	* 1.6559	* 1.5703	* 1.6787	* 1.4793	* 1.5291	* .9255
	* 2.5019	* 2.2474	* 1.9049	* 2.0073	* 1.8776	* 2.1314	* 2.0668	* 3.4214
10	* 1.4858	* 1.6581	* 1.5638	* 1.6949	* 1.5096	* 1.3644	* 1.5475	* .8182
	* 2.1227	* 1.9026	* 2.0215	* 1.8653	* 2.0986	* 2.3240	* 2.0479	* 3.8781
11	* 1.7057	* 1.5714	* 1.6971	* 1.5399	* 1.6364	* 1.4478	* 1.4207	* .7261
	* 1.8455	* 2.0060	* 1.8631	* 2.0614	* 1.9548	* 2.2157	* 2.2442	* 4.3880
12	* 1.5659	* 1.6797	* 1.5085	* 1.6364	* 1.5519	* 1.5865	* .9298	
	* 2.0060	* 1.8764	* 2.0986	* 1.9548	* 2.0736	* 2.0281	* 3.4515	
13	* 1.6418	* 1.4782	* 1.3644	* 1.4478	* 1.5865	* 1.4836	* .7413	
	* 1.9096	* 2.1328	* 2.3240	* 2.2141	* 2.0281	* 2.1727	* 4.3515	
14	* 1.2961	* 1.5291	* 1.5475	* 1.4207	* .9309	* .7413		
	* 2.4134	* 2.0668	* 2.0479	* 2.2426	* 3.4515	* 4.3515		
15	* .7499	* .9276	* .8182	* .7272	* F-SUB-Q			
	* 4.1721	* 3.4139	* 3.8781	* 4.3880	* M-SUB-Q			

AT 75% POWER, 300 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8605	* 1.2701	* 1.4933	* 1.7253	* 1.5768	* 1.6602	* 1.3037	* .7532
	* 3.6062	* 2.4454	* 2.0860	* 1.8073	* 1.9720	* 1.8720	* 2.3679	* 4.0746
9	* 1.2701	* 1.4131	* 1.6754	* 1.5800	* 1.6982	* 1.4879	* 1.5464	* .9320
	* 2.4454	* 2.2048	* 1.8675	* 1.9757	* 1.8423	* 2.0944	* 2.0202	* 3.3306
10	* 1.4933	* 1.6776	* 1.5757	* 1.7155	* 1.5193	* 1.3720	* 1.5670	* .8258
	* 2.0860	* 1.8653	* 1.9920	* 1.8358	* 2.0750	* 2.2951	* 2.0124	* 3.7755
11	* 1.7253	* 1.5811	* 1.7177	* 1.5529	* 1.6624	* 1.4652	* 1.4392	* .7337
	* 1.8073	* 1.9745	* 1.8347	* 2.0439	* 1.9355	* 2.1940	* 2.2063	* 4.2791
12	* 1.5768	* 1.6982	* 1.5183	* 1.6624	* 1.5714	* 1.6147	* .9417	
	* 1.9720	* 1.8423	* 2.0764	* 1.9355	* 2.0654	* 2.0014	* 3.3751	
13	* 1.6602	* 1.4868	* 1.3720	* 1.4662	* 1.6147	* 1.5107	* .7521	
	* 1.8720	* 2.0958	* 2.2951	* 2.1940	* 2.0014	* 2.1353	* 4.2094	
14	* 1.3037	* 1.5464	* 1.5670	* 1.4392	* .9428	* .7521		
	* 2.3679	* 2.0202	* 2.0124	* 2.2063	* 3.3708	* 4.2094		
15	* .7532	* .9341	* .8258	* .7337	* F-SUB-Q			
	* 4.0746	* 3.3235	* 3.7755	* 4.2744	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 104 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 300 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8540	* 1.2636	* 1.4901	* 1.7296	* 1.5746	* 1.6635	* 1.3004	* .7499
	* 3.3364	* 2.2656	* 1.9353	* 1.6723	* 1.8314	* 1.7334	* 2.1965	* 3.7695
9	* 1.2636	* 1.4088	* 1.6797	* 1.5768	* 1.7025	* 1.4836	* 1.5508	* .9298
	* 2.2656	* 2.0417	* 1.7262	* 1.8331	* 1.7042	* 1.9427	* 1.8635	* 3.0700
10	* 1.4901	* 1.6819	* 1.5735	* 1.7220	* 1.5161	* 1.3665	* 1.5724	* .8247
	* 1.9353	* 1.7242	* 1.8459	* 1.6938	* 1.9176	* 2.1185	* 1.8471	* 3.4736
11	* 1.7296	* 1.5779	* 1.7231	* 1.5508	* 1.6700	* 1.4684	* 1.4446	* .7326
	* 1.6723	* 1.8320	* 1.6920	* 1.8823	* 1.7682	* 2.0045	* 2.0163	* 3.9207
12	* 1.5746	* 1.7025	* 1.5150	* 1.6700	* 1.5746	* 1.6245	* .9428	*
	* 1.8314	* 1.7033	* 1.9188	* 1.7680	* 1.8883	* 1.8225	* 3.0884	*
13	* 1.6635	* 1.4825	* 1.3665	* 1.4684	* 1.6255	* 1.5215	* .7532	*
	* 1.7334	* 1.9439	* 2.1185	* 2.0045	* 1.8225	* 1.9443	* 3.8567	*
14	* 1.3004	* 1.5508	* 1.5724	* 1.4446	* .9428	* .7543	*	*
	* 2.1965	* 1.8635	* 1.8471	* 2.0152	* 3.0884	* 3.8576	*	*
15	* .7499	* .9320	* .8258	* .7326	* F-SUB-Q			
	* 3.7695	* 3.0640	* 3.4736	* 3.9207	* M-SUB-Q			

AT 75% POWER, 300 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8496	* 1.2582	* 1.4847	* 1.7285	* 1.5714	* 1.6613	* 1.2961	* .7467
	* 3.0896	* 2.0939	* 1.7807	* 1.5377	* 1.6874	* 1.5972	* 2.0295	* 3.4910
9	* 1.2582	* 1.4045	* 1.6776	* 1.5724	* 1.7003	* 1.4793	* 1.5497	* .9266
	* 2.0939	* 1.8860	* 1.5884	* 1.6879	* 1.5673	* 1.7914	* 1.7156	* 2.8357
10	* 1.4847	* 1.6797	* 1.5703	* 1.7198	* 1.5107	* 1.3622	* 1.5714	* .8225
	* 1.7807	* 1.5863	* 1.7033	* 1.5617	* 1.7727	* 1.9604	* 1.7051	* 3.2163
11	* 1.7285	* 1.5746	* 1.7220	* 1.5464	* 1.6711	* 1.4673	* 1.4435	* .7293
	* 1.5377	* 1.6866	* 1.5601	* 1.7379	* 1.6287	* 1.8492	* 1.8588	* 3.6312
12	* 1.5714	* 1.7014	* 1.5107	* 1.6700	* 1.5735	* 1.6266	* .9417	*
	* 1.6874	* 1.5665	* 1.7737	* 1.6288	* 1.7403	* 1.6778	* 2.8564	*
13	* 1.6613	* 1.4782	* 1.3622	* 1.4673	* 1.6266	* 1.5237	* .7521	*
	* 1.5972	* 1.7925	* 1.9604	* 1.8479	* 1.6778	* 1.7904	* 3.5659	*
14	* 1.2961	* 1.5497	* 1.5724	* 1.4446	* .9417	* .7532	*	*
	* 2.0295	* 1.7150	* 1.7043	* 1.8586	* 2.8569	* 3.5666	*	*
15	* .7467	* .9287	* .8225	* .7293	* F-SUB-Q			
	* 3.4910	* 2.8306	* 3.2163	* 3.6306	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 105 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 300 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8442	* 1.2528	* 1.4803	* 1.7166	* 1.5659	* 1.6505	* 1.2929	* .7434
	* 2.8805	* 1.9455	* 1.6555	* 1.4356	* 1.5700	* 1.4924	* 1.8916	* 3.2610
9	* 1.2528	* 1.3991	* 1.6656	* 1.5681	* 1.6884	* 1.4738	* 1.5399	* .9222
	* 1.9455	* 1.7499	* 1.4806	* 1.5697	* 1.4624	* 1.6678	* 1.6019	* 2.6448
10	* 1.4803	* 1.6678	* 1.5649	* 1.7090	* 1.5063	* 1.3579	* 1.5616	* .8182
	* 1.6555	* 1.4785	* 1.5801	* 1.4555	* 1.6485	* 1.8248	* 1.5901	* 2.9967
11	* 1.7166	* 1.5692	* 1.7112	* 1.5421	* 1.6602	* 1.4630	* 1.4348	* .7261
	* 1.4356	* 1.5681	* 1.4542	* 1.6191	* 1.5202	* 1.7213	* 1.7401	* 3.3970
12	* 1.5659	* 1.6895	* 1.5053	* 1.6591	* 1.5681	* 1.6180	* .9385	*
	* 1.5700	* 1.4617	* 1.6499	* 1.5209	* 1.6171	* 1.5647	* 2.6641	*
13	* 1.6505	* 1.4727	* 1.3579	* 1.4630	* 1.6180	* 1.5161	* .7488	*
	* 1.4924	* 1.6687	* 1.8248	* 1.7207	* 1.5634	* 1.6676	* 3.3292	*
14	* 1.2929	* 1.5399	* 1.5627	* 1.4359	* .9385	* .7499	*	*
	* 1.8916	* 1.6015	* 1.5901	* 1.7401	* 2.6641	* 3.3292	*	*
15	* .7434	* .9244	* .8182	* .7261	* F-SUB-Q			
	* 3.2610	* 2.6391	* 2.9955	* 3.3956	* M-SUB-Q			

AT 75% POWER, 300 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8507	* 1.2647	* 1.4966	* 1.7502	* 1.5865	* 1.6819	* 1.3069	* .7488
	* 2.6642	* 1.8017	* 1.5336	* 1.3195	* 1.4524	* 1.3726	* 1.7543	* 3.0386
9	* 1.2647	* 1.4142	* 1.6971	* 1.5865	* 1.7198	* 1.4912	* 1.5692	* .9320
	* 1.8017	* 1.6200	* 1.3600	* 1.4521	* 1.3435	* 1.5438	* 1.4727	* 2.4548
10	* 1.4966	* 1.6992	* 1.5844	* 1.7415	* 1.5237	* 1.3730	* 1.5930	* .8279
	* 1.5336	* 1.3579	* 1.4597	* 1.3343	* 1.5221	* 1.6860	* 1.4573	* 2.7716
11	* 1.7502	* 1.5876	* 1.7426	* 1.5605	* 1.6927	* 1.4836	* 1.4630	* .7337
	* 1.3195	* 1.4512	* 1.3326	* 1.4928	* 1.3898	* 1.5827	* 1.5962	* 3.1427
12	* 1.5865	* 1.7209	* 1.5226	* 1.6917	* 1.5909	* 1.6505	* .9493	*
	* 1.4524	* 1.3429	* 1.5229	* 1.3909	* 1.4834	* 1.4289	* 2.4602	*
13	* 1.6819	* 1.4912	* 1.3730	* 1.4847	* 1.6505	* 1.5475	* .7586	*
	* 1.3726	* 1.5445	* 1.6860	* 1.5827	* 1.4289	* 1.5235	* 3.0764	*
14	* 1.3069	* 1.5692	* 1.5930	* 1.4630	* .9493	* .7586	*	*
	* 1.7543	* 1.4724	* 1.4573	* 1.5962	* 2.4602	* 3.0764	*	*
15	* .7488	* .9341	* .8290	* .7337	* F-SUB-Q			
	* 3.0386	* 2.4498	* 2.7701	* 3.1408	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 106 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 300 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8507	* 1.2658	* 1.4977	* 1.7513	* 1.5887	* 1.6841	* 1.3080	* .7478
	* 2.5211	* 1.7037	* 1.4507	* 1.2478	* 1.3726	* 1.2977	* 1.6610	* 2.8887
9	* 1.2658	* 1.4153	* 1.6971	* 1.5898	* 1.7220	* 1.4944	* 1.5724	* .9309
	* 1.7037	* 1.5320	* 1.2865	* 1.3726	* 1.2704	* 1.4591	* 1.3912	* 2.3297
10	* 1.4977	* 1.6992	* 1.5865	* 1.7426	* 1.5258	* 1.3752	* 1.5974	* .8279
	* 1.4507	* 1.2844	* 1.3787	* 1.2594	* 1.4362	* 1.5908	* 1.3739	* 2.6255
11	* 1.7513	* 1.5909	* 1.7448	* 1.5616	* 1.6949	* 1.4879	* 1.4662	* .7315
	* 1.2478	* 1.3714	* 1.2582	* 1.4069	* 1.3078	* 1.4878	* 1.5016	* 2.9764
12	* 1.5887	* 1.7231	* 1.5248	* 1.6938	* 1.5963	* 1.6537	* .9504	*
	* 1.3726	* 1.2696	* 1.4368	* 1.3087	* 1.3897	* 1.3431	* 2.3239	*
13	* 1.6841	* 1.4933	* 1.3763	* 1.4890	* 1.6537	* 1.5519	* .7586	*
	* 1.2977	* 1.4597	* 1.5903	* 1.4878	* 1.3431	* 1.4327	* 2.9115	*
14	* 1.3080	* 1.5724	* 1.5974	* 1.4662	* .9504	* .7586	*	*
	* 1.6610	* 1.3912	* 1.3739	* 1.5016	* 2.3239	* 2.9070	*	*
15	* .7478	* .9331	* .8279	* .7326	* F-SUB-Q			
	* 2.8887	* 2.3245	* 2.6246	* 2.9753	* M-SUB-Q			

AT 75% POWER, 300 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8355	* 1.2463	* 1.4717	* 1.7047	* 1.5616	* 1.6418	* 1.2853	* .7326
	* 2.4546	* 1.6564	* 1.4127	* 1.2262	* 1.3355	* 1.2737	* 1.6184	* 2.8249
9	* 1.2463	* 1.3904	* 1.6494	* 1.5616	* 1.6754	* 1.4706	* 1.5345	* .9103
	* 1.6564	* 1.4921	* 1.2655	* 1.3364	* 1.2482	* 1.4187	* 1.3632	* 2.2810
10	* 1.4717	* 1.6516	* 1.5573	* 1.6960	* 1.4998	* 1.3557	* 1.5594	* .8095
	* 1.4127	* 1.2634	* 1.3424	* 1.2362	* 1.3948	* 1.5423	* 1.3448	* 2.5709
11	* 1.7047	* 1.5627	* 1.6971	* 1.5345	* 1.6505	* 1.4641	* 1.4305	* .7152
	* 1.2262	* 1.3347	* 1.2349	* 1.3660	* 1.2800	* 1.4423	* 1.4681	* 2.9114
12	* 1.5616	* 1.6765	* 1.4988	* 1.6494	* 1.5703	* 1.6125	* .9320	*
	* 1.3355	* 1.2474	* 1.3955	* 1.2800	* 1.3457	* 1.3125	* 2.2569	*
13	* 1.6418	* 1.4695	* 1.3557	* 1.4641	* 1.6125	* 1.5139	* .7423	*
	* 1.2737	* 1.4196	* 1.5415	* 1.4416	* 1.3129	* 1.3998	* 2.8381	*
14	* 1.2853	* 1.5345	* 1.5594	* 1.4316	* .9320	* .7423	*	*
	* 1.6184	* 1.3632	* 1.3442	* 1.4674	* 2.2569	* 2.8370	*	*
15	* .7326	* .9125	* .8095	* .7152	* F-SUB-Q			
	* 2.8249	* 2.2760	* 2.5688	* 2.9114	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 107 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 300 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8236	* 1.2267	* 1.4424	* 1.6624	* 1.5356	* 1.6050	* 1.2625	* .7163
	* 2.4083	* 1.6256	* 1.3915	* 1.2129	* 1.3114	* 1.2575	* 1.5923	* 2.7939
9	* 1.2267	* 1.3633	* 1.6050	* 1.5334	* 1.6353	* 1.4467	* 1.4998	* .8876
	* 1.6256	* 1.4686	* 1.2550	* 1.3134	* 1.2341	* 1.3914	* 1.3468	* 2.2617
10	* 1.4424	* 1.6082	* 1.5269	* 1.6526	* 1.4738	* 1.3362	* 1.5258	* .7911
	* 1.3915	* 1.2527	* 1.3206	* 1.2231	* 1.3700	* 1.5106	* 1.3255	* 2.5411
11	* 1.6624	* 1.5345	* 1.6537	* 1.5053	* 1.6125	* 1.4424	* 1.4012	* .6968
	* 1.2129	* 1.3123	* 1.2219	* 1.3427	* 1.2610	* 1.4082	* 1.4463	* 2.8871
12	* 1.5356	* 1.6353	* 1.4727	* 1.6115	* 1.5475	* 1.5790	* .9157	*
	* 1.3114	* 1.2337	* 1.3706	* 1.2612	* 1.3149	* 1.2914	* 2.2153	*
13	* 1.6050	* 1.4467	* 1.3362	* 1.4435	* 1.5790	* 1.4814	* .7272	*
	* 1.2575	* 1.3924	* 1.5099	* 1.4080	* 1.2908	* 1.3792	* 2.7889	*
14	* 1.2625	* 1.4998	* 1.5258	* 1.4012	* .9157	* .7272	*	*
	* 1.5923	* 1.3462	* 1.3253	* 1.4459	* 2.2146	* 2.7879	*	*
15	* .7163	* .8897	* .7911	* .6979	* F-SUB-Q			
	* 2.7939	* 2.2568	* 2.5399	* 2.8844	* M-SUB-Q			

AT 75% POWER, 300 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7683	* 1.1411	* 1.3351	* 1.5139	* 1.4305	* 1.4619	* 1.1726	* .6621
	* 2.5201	* 1.7036	* 1.4635	* 1.2959	* 1.3705	* 1.3438	* 1.6701	* 2.9500
9	* 1.1411	* 1.2625	* 1.4587	* 1.4207	* 1.4890	* 1.3470	* 1.3676	* .8117
	* 1.7036	* 1.5440	* 1.3439	* 1.3789	* 1.3190	* 1.4557	* 1.4378	* 2.4138
10	* 1.3351	* 1.4608	* 1.4131	* 1.5020	* 1.3655	* 1.2419	* 1.3806	* .7239
	* 1.4635	* 1.3416	* 1.3875	* 1.3086	* 1.4377	* 1.5817	* 1.4262	* 2.7074
11	* 1.5139	* 1.4218	* 1.5042	* 1.3926	* 1.4684	* 1.3427	* 1.2712	* .6361
	* 1.2959	* 1.3777	* 1.3075	* 1.4116	* 1.3447	* 1.4705	* 1.5519	* 3.0823
12	* 1.4305	* 1.4901	* 1.3644	* 1.4684	* 1.4402	* 1.4435	* .8475	*
	* 1.3705	* 1.3179	* 1.4384	* 1.3453	* 1.3720	* 1.3712	* 2.3263	*
13	* 1.4619	* 1.3460	* 1.2419	* 1.3427	* 1.4435	* 1.3460	* .6708	*
	* 1.3438	* 1.4563	* 1.5814	* 1.4698	* 1.3708	* 1.4740	* 2.9416	*
14	* 1.1726	* 1.3676	* 1.3806	* 1.2712	* .8475	* .6708	*	*
	* 1.6701	* 1.4371	* 1.4256	* 1.5507	* 2.3253	* 2.9405	*	*
15	* .6621	* .8128	* .7239	* .6372	* F-SUB-Q			
	* 2.9500	* 2.4082	* 2.7051	* 3.0792	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 108 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OF MARGIN) - NORMAL OPERATION

AT 75% POWER, 300 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6502 *	* .8984 *	* 1.0512 *	* 1.2679 *	* 1.1823 *	* 1.2083 *	* .9677 *	* .5494 *
	* 2.9169 *	* 2.1232 *	* 1.8201 *	* 1.5138 *	* 1.6233 *	* 1.5898 *	* 1.9835 *	* 3.4861 *
9	* .8984 *	* 1.0013 *	* 1.2267 *	* 1.1205 *	* 1.2528 *	* 1.0859 *	* 1.1010 *	* .6481 *
	* 2.1232 *	* 1.9072 *	* 1.5638 *	* 1.7117 *	* 1.5325 *	* 1.7678 *	* 1.7486 *	* 2.9622 *
10	* 1.0512 *	* 1.2289 *	* 1.1184 *	* 1.2495 *	* 1.0750 *	* .9732 *	* 1.0772 *	* .5863 *
	* 1.8201 *	* 1.5611 *	* 1.7142 *	* 1.5374 *	* 1.7879 *	* 1.9765 *	* 1.7900 *	* 3.2775 *
11	* 1.2679 *	* 1.1205 *	* 1.2517 *	* 1.0935 *	* 1.2322 *	* 1.1075 *	* 1.0208 *	* .5202 *
	* 1.5138 *	* 1.7108 *	* 1.5344 *	* 1.7578 *	* 1.5679 *	* 1.7453 *	* 1.8927 *	* 3.7000 *
12	* 1.1823 *	* 1.2538 *	* 1.0739 *	* 1.2322 *	* 1.1856 *	* 1.1769 *	* .7044 *	
	* 1.6233 *	* 1.5317 *	* 1.7889 *	* 1.5679 *	* 1.6293 *	* 1.6458 *	* 2.7442 *	
13	* 1.2083 *	* 1.0859 *	* .9742 *	* 1.1075 *	* 1.1769 *	* 1.0642 *	* .5527 *	
	* 1.5898 *	* 1.7688 *	* 1.9752 *	* 1.7443 *	* 1.6458 *	* 1.8224 *	* 3.4930 *	
14	* .9677 *	* 1.1010 *	* 1.0772 *	* 1.0208 *	* .7044 *	* .5538 *		
	* 1.9835 *	* 1.7481 *	* 1.7890 *	* 1.8909 *	* 2.7432 *	* 3.4930 *		
15	* .5494 *	* .6491 *	* .5874 *	* .5202 *	F-SUB-Q			
	* 3.4861 *	* 2.9582 *	* 3.2741 *	* 3.6931 *	M-SUB-Q			

AT 75% POWER, 300 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .4584 *	* .4248 *	* .4953 *	* .5754 *	* .5321 *	* .5473 *	* .4465 *	* .2774 *
	* 4.0794 *	* 4.4076 *	* 3.7875 *	* 3.2657 *	* 3.5386 *	* 3.4407 *	* 4.2224 *	* 6.7981 *
9	* .4248 *	* .4844 *	* .5570 *	* .5169 *	* .5689 *	* .5018 *	* .4692 *	* .3002 *
	* 4.4076 *	* 3.8756 *	* 3.3733 *	* 3.6380 *	* 3.3064 *	* 3.7495 *	* 4.0167 *	* 6.2855 *
10	* .4953 *	* .5570 *	* .5115 *	* .5679 *	* .5028 *	* .4465 *	* .4573 *	* .2969 *
	* 3.7875 *	* 3.3682 *	* 3.6782 *	* 3.3155 *	* 3.7476 *	* 4.2201 *	* 4.1289 *	* 6.3491 *
11	* .5754 *	* .5169 *	* .5679 *	* .5083 *	* .5570 *	* .4920 *	* .4259 *	* .2590 *
	* 3.2657 *	* 3.6338 *	* 3.3120 *	* 3.7042 *	* 3.3937 *	* 3.8499 *	* 4.4414 *	* 7.2914 *
12	* .5321 *	* .5689 *	* .5028 *	* .5570 *	* .5278 *	* .5007 *	* .3609 *	
	* 3.5386 *	* 3.3050 *	* 3.7476 *	* 3.3937 *	* 3.5872 *	* 3.7857 *	* 5.2581 *	
13	* .5473 *	* .5018 *	* .4465 *	* .4920 *	* .5007 *	* .4487 *	* .2807 *	
	* 3.4407 *	* 3.7495 *	* 4.2201 *	* 3.8479 *	* 3.7857 *	* 4.2234 *	* 6.7568 *	
14	* .4465 *	* .4692 *	* .4573 *	* .4259 *	* .3609 *	* .2807 *		
	* 4.2224 *	* 4.0167 *	* 4.1289 *	* 4.4414 *	* 5.2529 *	* 6.7568 *		
15	* .2774 *	* .3002 *	* .2969 *	* .2590 *	F-SUB-Q			
	* 6.7981 *	* 6.2804 *	* 6.3491 *	* 7.2814 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 109 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 470 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6177 *	* .6665 *	* .7586 *	* .8269 *	* .8074 *	* .8074 *	* .7120 *	* .4931 *
	* 3.4602 *	* 3.3569 *	* 2.9487 *	* 2.6307 *	* 2.7708 *	* 2.6874 *	* 3.1324 *	* 4.5023 *
9	* .6665 *	* .7358 *	* .7987 *	* .7900 *	* .8204 *	* .7748 *	* .7196 *	* .5213 *
	* 3.3569 *	* 3.0378 *	* 2.7197 *	* 2.8299 *	* 2.6460 *	* 2.8817 *	* 3.0067 *	* 4.2497 *
10	* .7586 *	* .7987 *	* .7705 *	* .8009 *	* .7564 *	* .7033 *	* .6881 *	* .5083 *
	* 2.9487 *	* 2.7171 *	* 2.8960 *	* 2.7054 *	* 2.9465 *	* 3.1622 *	* 3.1253 *	* 4.3464 *
11	* .8269 *	* .7911 *	* .8009 *	* .7402 *	* .7001 *	* .6491 *	* .6069 *	* .4324 *
	* 2.6307 *	* 2.8293 *	* 2.7048 *	* 3.0058 *	* 3.0589 *	* 3.3893 *	* 3.4989 *	* 5.0663 *
12	* .8074 *	* .8204 *	* .7564 *	* .7001 *	* .5668 *	* .5234 *	* .4833 *	
	* 2.7708 *	* 2.6460 *	* 2.9443 *	* 3.0589 *	* 3.2634 *	* 3.4415 *	* 4.4143 *	
13	* .8074 *	* .7748 *	* .7033 *	* .6491 *	* .5234 *	* .4660 *	* .3609 *	
	* 2.6874 *	* 2.8839 *	* 3.1622 *	* 3.3893 *	* 3.4389 *	* 3.7468 *	* 5.4983 *	
14	* .7120 *	* .7196 *	* .6881 *	* .6069 *	* .4833 *	* .3609 *		
	* 3.1324 *	* 3.0067 *	* 3.1253 *	* 3.4989 *	* 4.4143 *	* 5.4983 *		
15	* .4931 *	* .5213 *	* .5083 *	* .4324 *	F-SUB-Q			
	* 4.5023 *	* 4.2497 *	* 4.3464 *	* 5.0663 *	M-SUB-Q			

AT 75% POWER, 470 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7315 *	* 1.2192 *	* 1.4196 *	* 1.4847 *	* 1.4879 *	* 1.4771 *	* 1.3124 *	* .8312 *
	* 2.8521 *	* 1.8693 *	* 1.6082 *	* 1.4922 *	* 1.5342 *	* 1.4979 *	* 1.7320 *	* 2.7240 *
9	* 1.2192 *	* 1.3438 *	* 1.4316 *	* 1.4868 *	* 1.4717 *	* 1.4532 *	* 1.3969 *	* .9710 *
	* 1.8693 *	* 1.6965 *	* 1.5455 *	* 1.5357 *	* 1.5035 *	* 1.5678 *	* 1.5785 *	* 2.3282 *
10	* 1.4196 *	* 1.4327 *	* 1.4467 *	* 1.4370 *	* 1.4175 *	* 1.3351 *	* 1.3709 *	* .8550 *
	* 1.6082 *	* 1.5440 *	* 1.5744 *	* 1.5347 *	* 1.6015 *	* 1.6965 *	* 1.5993 *	* 2.6384 *
11	* 1.4847 *	* 1.4868 *	* 1.4381 *	* 1.3741 *	* 1.2733 *	* 1.2083 *	* 1.2083 *	* .7369 *
	* 1.4922 *	* 1.5350 *	* 1.5338 *	* 1.6466 *	* 1.7188 *	* 1.8437 *	* 1.7956 *	* 3.0274 *
12	* 1.4879 *	* 1.4717 *	* 1.4175 *	* 1.2733 *	* 1.0143 *	* 1.0425 *	* .8074 *	
	* 1.5342 *	* 1.5033 *	* 1.6017 *	* 1.7188 *	* 1.7754 *	* 1.8041 *	* 2.7025 *	
13	* 1.4771 *	* 1.4522 *	* 1.3351 *	* 1.2094 *	* 1.0425 *	* .9276 *	* .6112 *	
	* 1.4979 *	* 1.5680 *	* 1.6965 *	* 1.8434 *	* 1.8036 *	* 1.9216 *	* 3.2900 *	
14	* 1.3124 *	* 1.3969 *	* 1.3709 *	* 1.2083 *	* .8074 *	* .6112 *		
	* 1.7320 *	* 1.5785 *	* 1.5993 *	* 1.7953 *	* 2.7025 *	* 3.2900 *		
15	* .8312 *	* .9710 *	* .8550 *	* .7369 *	F-SUB-Q			
	* 2.7240 *	* 2.3264 *	* 2.6384 *	* 3.0274 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 110 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 470 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8009	* 1.3384	* 1.5790	* 1.7133	* 1.6548	* 1.7047	* 1.4662	* .9255
	* 2.6756	* 1.7278	* 1.4658	* 1.3085	* 1.3987	* 1.3134	* 1.5730	* 2.4830
9	* 1.3384	* 1.4879	* 1.6537	* 1.6581	* 1.7003	* 1.6169	* 1.6190	* 1.0989
	* 1.7278	* 1.5534	* 1.3534	* 1.3953	* 1.3171	* 1.4274	* 1.3783	* 2.0875
10	* 1.5790	* 1.6559	* 1.6125	* 1.6602	* 1.5757	* 1.4793	* 1.5887	* .9580
	* 1.4658	* 1.3526	* 1.4319	* 1.3456	* 1.4600	* 1.5482	* 1.3943	* 2.3847
11	* 1.7133	* 1.6581	* 1.6613	* 1.5302	* 1.4576	* 1.3405	* 1.3991	* .8312
	* 1.3085	* 1.3952	* 1.3448	* 1.4991	* 1.5175	* 1.6834	* 1.5679	* 2.7221
12	* 1.6548	* 1.7003	* 1.5757	* 1.4576	* 1.1357	* 1.1997	* .8995	*
	* 1.3987	* 1.3166	* 1.4600	* 1.5175	* 1.6281	* 1.5682	* 2.4162	*
13	* 1.7047	* 1.6169	* 1.4793	* 1.3416	* 1.1997	* 1.0848	* .6827	*
	* 1.3134	* 1.4279	* 1.5482	* 1.6831	* 1.5682	* 1.6670	* 2.9600	*
14	* 1.4662	* 1.6190	* 1.5887	* 1.3991	* .8995	* .6827	*	*
	* 1.5730	* 1.3783	* 1.3943	* 1.5677	* 2.4162	* 2.9600	*	*
15	* .9255	* 1.1000	* .9580	* .8312	* F-SUB-Q			
	* 2.4830	* 2.0861	* 2.3847	* 2.7221	* M-SUB-Q			

AT 75% POWER, 470 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8139	* 1.3600	* 1.6255	* 1.8250	* 1.7112	* 1.8087	* 1.5183	* .9547
	* 2.5346	* 1.7268	* 1.4435	* 1.2404	* 1.3674	* 1.2494	* 1.5387	* 2.4390
9	* 1.3600	* 1.5258	* 1.7599	* 1.7112	* 1.8109	* 1.6689	* 1.7263	* 1.1444
	* 1.7268	* 1.5390	* 1.2873	* 1.3678	* 1.2476	* 1.3987	* 1.3056	* 2.0290
10	* 1.6255	* 1.7610	* 1.6646	* 1.7664	* 1.6201	* 1.5139	* 1.6884	* .9970
	* 1.4435	* 1.2861	* 1.4067	* 1.2783	* 1.4354	* 1.5324	* 1.3245	* 2.3224
11	* 1.8250	* 1.7122	* 1.7675	* 1.5768	* 1.5421	* 1.3806	* 1.4847	* .8670
	* 1.2404	* 1.3672	* 1.2776	* 1.4731	* 1.4046	* 1.5950	* 1.4892	* 2.6382
12	* 1.7112	* 1.8109	* 1.6201	* 1.5410	* 1.1801	* 1.2744	* .9309	*
	* 1.3674	* 1.2474	* 1.4361	* 1.4046	* 1.5221	* 1.4318	* 2.3021	*
13	* 1.8087	* 1.6678	* 1.5139	* 1.3806	* 1.2755	* 1.1639	* .7087	*
	* 1.2494	* 1.3994	* 1.5324	* 1.5950	* 1.4318	* 1.5256	* 2.7971	*
14	* 1.5183	* 1.7263	* 1.6884	* 1.4847	* .9309	* .7087	*	*
	* 1.5387	* 1.3056	* 1.3245	* 1.4892	* 2.3038	* 2.7971	*	*
15	* .9547	* 1.1455	* .9970	* .8670	* F-SUB-Q			
	* 2.4390	* 2.0262	* 2.3212	* 2.6373	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 111 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 470 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7878	* 1.3102	* 1.5768	* 1.8011	* 1.6678	* 1.7827	* 1.4793	* .9298
	* 2.6280	* 1.8234	* 1.5125	* 1.2729	* 1.4255	* 1.2833	* 1.6018	* 2.5439
9	* 1.3102	* 1.4771	* 1.7350	* 1.6646	* 1.7870	* 1.6234	* 1.7057	* 1.1173
	* 1.8234	* 1.6153	* 1.3220	* 1.4284	* 1.2814	* 1.4616	* 1.3377	* 2.1093
10	* 1.5768	* 1.7372	* 1.6190	* 1.7415	* 1.5714	* 1.4641	* 1.6667	* .9732
	* 1.5125	* 1.3208	* 1.4681	* 1.3132	* 1.5038	* 1.6055	* 1.3541	* 2.4047
11	* 1.8011	* 1.6656	* 1.7426	* 1.5313	* 1.5204	* 1.3416	* 1.4630	* .8475
	* 1.2729	* 1.4277	* 1.3124	* 1.5443	* 1.4070	* 1.6204	* 1.5214	* 2.7261
12	* 1.6678	* 1.7881	* 1.5703	* 1.5204	* 1.1606	* 1.2614	* .9092	*
	* 1.4255	* 1.2810	* 1.5045	* 1.4070	* 1.5338	* 1.4202	* 2.3522	*
13	* 1.7827	* 1.6223	* 1.4641	* 1.3416	* 1.2614	* 1.1574	* .6925	*
	* 1.2833	* 1.4616	* 1.6055	* 1.6204	* 1.4202	* 1.5095	* 2.8426	*
14	* 1.4793	* 1.7057	* 1.6667	* 1.4630	* .9081	* .6925	*	*
	* 1.6018	* 1.3377	* 1.3537	* 1.5214	* 2.3540	* 2.8426	*	*
15	* .9298	* 1.1184	* .9742	* .8475	* F-SUB-Q			
	* 2.5439	* 2.1064	* 2.4047	* 2.7261	* M-SUB-Q			

AT 75% POWER, 470 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7608	* 1.2495	* 1.5074	* 1.7383	* 1.5995	* 1.7198	* 1.4207	* .8919
	* 2.7956	* 1.9491	* 1.6085	* 1.3354	* 1.5066	* 1.3444	* 1.6888	* 2.6832
9	* 1.2495	* 1.4099	* 1.6732	* 1.5941	* 1.7242	* 1.5540	* 1.6472	* 1.0729
	* 1.9491	* 1.7231	* 1.3918	* 1.5146	* 1.3432	* 1.5453	* 1.3991	* 2.2203
10	* 1.5074	* 1.6743	* 1.5508	* 1.6787	* 1.5009	* 1.3969	* 1.6104	* .9352
	* 1.6085	* 1.3905	* 1.5591	* 1.3812	* 1.5984	* 1.7093	* 1.4192	* 2.5397
11	* 1.7383	* 1.5952	* 1.6808	* 1.4641	* 1.4673	* 1.2864	* 1.4142	* .8160
	* 1.3354	* 1.5138	* 1.3801	* 1.6400	* 1.4624	* 1.6986	* 1.6037	* 2.8866
12	* 1.5995	* 1.7242	* 1.5009	* 1.4673	* 1.1281	* 1.2235	* .8745	*
	* 1.5066	* 1.3432	* 1.5992	* 1.4624	* 1.6050	* 1.4705	* 2.4690	*
13	* 1.7198	* 1.5540	* 1.3969	* 1.2864	* 1.2235	* 1.1281	* .6686	*
	* 1.3444	* 1.5461	* 1.7093	* 1.6986	* 1.4705	* 1.5618	* 2.9748	*
14	* 1.4207	* 1.6483	* 1.6115	* 1.4153	* .8745	* .6686	*	*
	* 1.6888	* 1.3984	* 1.4188	* 1.6032	* 2.4690	* 2.9719	*	*
15	* .8919	* 1.0750	* .9352	* .8160	* F-SUB-Q			
	* 2.6832	* 2.2171	* 2.5397	* 2.8866	* M-SUB-Q			

CNEI-0400-24
Appendix A, Rev. 18
Page 112 of 268

	H	G	F	E	D	C	B	A
8	* .7066	* 1.1563	* 1.3991	* 1.6364	* 1.4901	* 1.6190	* 1.3264	* .8323
	* 3.0654	* 2.1858	* 1.8365	* 1.5091	* 1.7164	* 1.5160	* 1.9113	* 3.0374
9	* 1.1563	* 1.3080	* 1.5746	* 1.4814	* 1.6223	* 1.4457	* 1.5584	* 1.0046
	* 2.1858	* 1.9677	* 1.5717	* 1.7296	* 1.5190	* 1.7616	* 1.5684	* 2.5133
10	* 1.3991	* 1.5768	* 1.4424	* 1.5790	* 1.3926	* 1.2961	* 1.5237	* .8778
	* 1.8365	* 1.5700	* 1.7802	* 1.5643	* 1.8362	* 1.9587	* 1.5995	* 2.8782
11	* 1.6364	* 1.4825	* 1.5811	* 1.3600	* 1.3839	* 1.2029	* 1.3416	* .7673
	* 1.5091	* 1.7286	* 1.5630	* 1.8217	* 1.6005	* 1.8683	* 1.7622	* 3.2899
12	* 1.4901	* 1.6234	* 1.3926	* 1.3839	* 1.0620	* 1.1639	* .8247	*
	* 1.7164	* 1.5185	* 1.8368	* 1.6005	* 1.7796	* 1.6092	* 2.7040	*
13	* 1.6190	* 1.4446	* 1.2961	* 1.2029	* 1.1639	* 1.0837	* .6340	*
	* 1.5160	* 1.7626	* 1.9587	* 1.8682	* 1.6092	* 1.7135	* 3.2751	*
14	* 1.3264	* 1.5584	* 1.5237	* 1.3416	* .8247	* .6340	*	*
	* 1.9113	* 1.5676	* 1.5995	* 1.7622	* 2.7040	* 3.2751	*	*
15	* .8323	* 1.0057	* .8778	* .7673	* F-SUB-Q			
	* 3.0374	* 2.5100	* 2.8772	* 3.2899	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 113 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 470 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6881	* 1.1270	* 1.3622	* 1.5985	* 1.4511	* 1.5811	* 1.2939	* .8128
	* 3.1604	* 2.2515	* 1.9507	* 1.6308	* 1.8456	* 1.6385	* 2.0496	* 3.2537
9	* 1.1270	* 1.2755	* 1.5399	* 1.4424	* 1.5844	* 1.4077	* 1.5258	* .9818
	* 2.2515	* 2.0451	* 1.6680	* 1.8526	* 1.6388	* 1.8941	* 1.6896	* 2.6927
10	* 1.3622	* 1.5410	* 1.4056	* 1.5443	* 1.3568	* 1.2647	* 1.4933	* .8583
	* 1.9507	* 1.6661	* 1.8637	* 1.6416	* 1.9016	* 2.0506	* 1.7009	* 3.0763
11	* 1.5985	* 1.4435	* 1.5454	* 1.3275	* 1.3568	* 1.1791	* 1.3199	* .7521
	* 1.6308	* 1.8514	* 1.6407	* 1.8763	* 1.6599	* 1.9255	* 1.8229	* 3.4131
12	* 1.4511	* 1.5855	* 1.3568	* 1.3568	* 1.0414	* 1.1498	* .8128	*
	* 1.8456	* 1.6379	* 1.9028	* 1.6608	* 1.8363	* 1.6681	* 2.7852	*
13	* 1.5811	* 1.4066	* 1.2647	* 1.1791	* 1.1498	* 1.0750	* .6275	*
	* 1.6385	* 1.8953	* 2.0506	* 1.9244	* 1.6681	* 1.7757	* 3.3764	*
14	* 1.2939	* 1.5258	* 1.4944	* 1.3199	* .8128	* .6275	*	*
	* 2.0496	* 1.6890	* 1.7009	* 1.8229	* 2.7853	* 3.3762	*	*
15	* .8128	* .9829	* .8594	* .7521	* F-SUB-Q			
	* 3.2537	* 2.6904	* 3.0763	* 3.4131	* M-SUB-Q			

AT 75% POWER, 470 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6697	* 1.0945	* 1.3189	* 1.5443	* 1.4045	* 1.5280	* 1.2538	* .7878
	* 3.2855	* 2.3326	* 2.0199	* 1.7066	* 1.9183	* 1.7329	* 2.1643	* 3.4623
9	* 1.0945	* 1.2365	* 1.4901	* 1.3947	* 1.5313	* 1.3622	* 1.4760	* .9526
	* 2.3326	* 2.1182	* 1.7459	* 1.9206	* 1.7162	* 1.9759	* 1.7840	* 2.8386
10	* 1.3189	* 1.4912	* 1.3622	* 1.4955	* 1.3156	* 1.2278	* 1.4500	* .8344
	* 2.0199	* 1.7439	* 1.9351	* 1.7231	* 1.9785	* 2.1343	* 1.7851	* 3.1938
11	* 1.5443	* 1.3958	* 1.4966	* 1.2907	* 1.3232	* 1.1541	* 1.2874	* .7337
	* 1.7066	* 1.9194	* 1.7221	* 1.9547	* 1.7550	* 2.0159	* 1.9210	* 3.5458
12	* 1.4045	* 1.5313	* 1.3156	* 1.3232	* 1.0230	* 1.1336	* .8009	*
	* 1.9183	* 1.7162	* 1.9797	* 1.7550	* 1.9242	* 1.7673	* 2.9136	*
13	* 1.5280	* 1.3611	* 1.2278	* 1.1541	* 1.1336	* 1.0674	* .6231	*
	* 1.7329	* 1.9772	* 2.1343	* 2.0146	* 1.7673	* 1.8835	* 3.5458	*
14	* 1.2538	* 1.4771	* 1.4500	* 1.2874	* .8009	* .6231	*	*
	* 2.1643	* 1.7840	* 1.7851	* 1.9210	* 2.9136	* 3.5458	*	*
15	* .7878	* .9537	* .8344	* .7337	* F-SUB-Q			
	* 3.4623	* 2.8334	* 3.1938	* 3.5458	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 114 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 470 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6795	* 1.0935	* 1.3102	* 1.5410	* 1.3926	* 1.5248	* 1.2452	* .7813
	* 3.3564	* 2.3889	* 2.0665	* 1.7481	* 1.9609	* 1.7744	* 2.2090	* 3.5318
9	* 1.0935	* 1.2333	* 1.4912	* 1.3839	* 1.5291	* 1.3514	* 1.4782	* .9472
	* 2.3889	* 2.1674	* 1.7888	* 1.9658	* 1.7591	* 2.0221	* 1.8250	* 2.8992
10	* 1.3102	* 1.4933	* 1.3557	* 1.4988	* 1.3113	* 1.2235	* 1.4565	* .8334
	* 2.0665	* 1.7878	* 1.9847	* 1.7703	* 2.0327	* 2.1934	* 1.8304	* 3.2613
11	* 1.5410	* 1.3850	* 1.4998	* 1.2929	* 1.3481	* 1.1704	* 1.3048	* .7347
	* 1.7481	* 1.9646	* 1.7682	* 2.0077	* 1.8025	* 2.0637	* 1.9676	* 3.6351
12	* 1.3926	* 1.5302	* 1.3102	* 1.3470	* 1.0566	* 1.1823	* .8182	*
	* 1.9609	* 1.7591	* 2.0340	* 1.8025	* 1.9721	* 1.8121	* 2.9827	*
13	* 1.5248	* 1.3503	* 1.2235	* 1.1715	* 1.1823	* 1.1216	* .6437	*
	* 1.7744	* 2.0234	* 2.1934	* 2.0624	* 1.8121	* 1.9305	* 3.6266	*
14	* 1.2452	* 1.4793	* 1.4565	* 1.3048	* .8182	* .6437	*	*
	* 2.2090	* 1.8250	* 1.8304	* 1.9676	* 2.9827	* 3.6266	*	*
15	* .7813	* .9493	* .8334	* .7358	* F-SUB-Q			
	* 3.5318	* 2.8938	* 3.2613	* 3.6308	* M-SUB-Q			

AT 75% POWER, 470 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7293	* 1.1000	* 1.3015	* 1.5302	* 1.3785	* 1.5118	* 1.2333	* .7738
	* 3.4751	* 2.4705	* 2.1349	* 1.8155	* 2.0256	* 1.8434	* 2.2779	* 3.6410
9	* 1.1000	* 1.2300	* 1.4858	* 1.3720	* 1.5183	* 1.3384	* 1.4695	* .9407
	* 2.4705	* 2.2388	* 1.8588	* 2.0322	* 1.8283	* 2.0892	* 1.8916	* 2.9901
10	* 1.3015	* 1.4868	* 1.3492	* 1.4944	* 1.3069	* 1.2192	* 1.4554	* .8301
	* 2.1349	* 1.8566	* 2.0495	* 1.8380	* 2.1019	* 2.2664	* 1.8985	* 3.3594
11	* 1.5302	* 1.3720	* 1.4955	* 1.2994	* 1.3795	* 1.1975	* 1.3178	* .7369
	* 1.8155	* 2.0309	* 1.8369	* 2.0781	* 1.8824	* 2.1407	* 2.0469	* 3.7456
12	* 1.3785	* 1.5193	* 1.3059	* 1.3795	* 1.1596	* 1.2723	* .8410	*
	* 2.0256	* 1.8283	* 2.1033	* 1.8824	* 2.0495	* 1.8962	* 3.0936	*
13	* 1.5118	* 1.3373	* 1.2192	* 1.1975	* 1.2723	* 1.2007	* .6719	*
	* 1.8434	* 2.0892	* 2.2647	* 2.1407	* 1.8962	* 2.0204	* 3.7727	*
14	* 1.2333	* 1.4706	* 1.4554	* 1.3178	* .8410	* .6719	*	*
	* 2.2779	* 1.8916	* 1.8985	* 2.0469	* 3.0936	* 3.7682	*	*
15	* .7738	* .9417	* .8301	* .7369	* F-SUB-Q			
	* 3.6410	* 2.9844	* 3.3594	* 3.7456	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 115 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 470 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7727	* 1.1054	* 1.2896	* 1.5107	* 1.3622	* 1.4923	* 1.2192	* .7651
	* 3.6313	* 2.5780	* 2.2283	* 1.9026	* 2.1056	* 1.9189	* 2.3466	* 3.7439
9	* 1.1054	* 1.2257	* 1.4727	* 1.3568	* 1.5009	* 1.3232	* 1.4554	* .9309
	* 2.5780	* 2.3361	* 1.9475	* 2.1213	* 1.9166	* 2.1727	* 1.9782	* 3.1002
10	* 1.2896	* 1.4738	* 1.3395	* 1.4836	* 1.3004	* 1.2137	* 1.4467	* .8247
	* 2.2283	* 1.9463	* 2.1401	* 1.9283	* 2.1971	* 2.3643	* 1.9857	* 3.5016
11	* 1.5107	* 1.3568	* 1.4858	* 1.3037	* 1.4099	* 1.2322	* 1.3243	* .7358
	* 1.9026	* 2.1199	* 1.9260	* 2.1742	* 1.9794	* 2.2378	* 2.1460	* 3.9071
12	* 1.3622	* 1.5009	* 1.2994	* 1.4088	* 1.2614	* 1.3644	* .8637	*
	* 2.1056	* 1.9166	* 2.1971	* 1.9794	* 2.1430	* 1.9882	* 3.2311	*
13	* 1.4923	* 1.3221	* 1.2137	* 1.2322	* 1.3644	* 1.2777	* .6990	*
	* 1.9189	* 2.1742	* 2.3643	* 2.2378	* 1.9882	* 2.1170	* 3.9365	*
14	* 1.2192	* 1.4554	* 1.4467	* 1.3243	* .8637	* .6990	*	*
	* 2.3466	* 1.9782	* 1.9857	* 2.1460	* 3.2311	* 3.9365	*	*
15	* .7651	* .9331	* .8247	* .7358	F-SUB-Q			
	* 3.7439	* 3.0941	* 3.5016	* 3.9071	M-SUB-Q			

AT 75% POWER, 470 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8009	* 1.1270	* 1.3048	* 1.5313	* 1.3752	* 1.5107	* 1.2311	* .7738
	* 3.6229	* 2.5844	* 2.2442	* 1.9038	* 2.1142	* 1.9236	* 2.3519	* 3.7350
9	* 1.1270	* 1.2441	* 1.4966	* 1.3698	* 1.5204	* 1.3351	* 1.4814	* .9439
	* 2.5844	* 2.3501	* 1.9597	* 2.1328	* 1.9213	* 2.1818	* 1.9732	* 3.0880
10	* 1.3048	* 1.4988	* 1.3579	* 1.5107	* 1.3210	* 1.2322	* 1.4749	* .8399
	* 2.2442	* 1.9572	* 2.1607	* 1.9451	* 2.2251	* 2.3877	* 1.9971	* 3.5016
11	* 1.5313	* 1.3709	* 1.5118	* 1.3330	* 1.4630	* 1.2918	* 1.3644	* .7521
	* 1.9038	* 2.1314	* 1.9427	* 2.2048	* 1.9996	* 2.2636	* 2.1563	* 3.9071
12	* 1.3752	* 1.5215	* 1.3199	* 1.4630	* 1.3470	* 1.4543	* .9006	*
	* 2.1142	* 1.9213	* 2.2267	* 1.9996	* 2.1727	* 2.0073	* 3.2445	*
13	* 1.5107	* 1.3351	* 1.2322	* 1.2918	* 1.4543	* 1.3655	* .7358	*
	* 1.9236	* 2.1818	* 2.3877	* 2.2620	* 2.0073	* 2.1343	* 3.9415	*
14	* 1.2311	* 1.4814	* 1.4749	* 1.3644	* .8995	* .7358	*	*
	* 2.3519	* 1.9732	* 1.9971	* 2.1563	* 3.2445	* 3.9365	*	*
15	* .7738	* .9450	* .8399	* .7521	F-SUB-Q			
	* 3.7350	* 3.0819	* 3.4977	* 3.9071	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 116 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 470 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8095	* 1.1346	* 1.3102	* 1.5410	* 1.3795	* 1.5193	* 1.2343	* .7748
	* 3.4302	* 2.4582	* 2.1480	* 1.8294	* 2.0378	* 1.8517	* 2.2642	* 3.5708
9	* 1.1346	* 1.2517	* 1.5107	* 1.3741	* 1.5313	* 1.3395	* 1.4966	* .9482
	* 2.4582	* 2.2404	* 1.8724	* 2.0493	* 1.8445	* 2.0996	* 1.8923	* 2.9433
10	* 1.3102	* 1.5118	* 1.3655	* 1.5258	* 1.3297	* 1.2408	* 1.4912	* .8464
	* 2.1480	* 1.8702	* 2.0673	* 1.8580	* 2.1276	* 2.2774	* 1.9052	* 3.3192
11	* 1.5410	* 1.3752	* 1.5269	* 1.3460	* 1.5009	* 1.3221	* 1.3893	* .7597
	* 1.8294	* 2.0480	* 1.8568	* 2.1050	* 1.9094	* 2.1603	* 2.0448	* 3.6948
12	* 1.3795	* 1.5324	* 1.3286	* 1.5009	* 1.3850	* 1.5009	* .9201	*
	* 2.0378	* 1.8438	* 2.1277	* 1.9105	* 2.0815	* 1.9146	* 3.0797	*
13	* 1.5193	* 1.3384	* 1.2408	* 1.3221	* 1.5020	* 1.4153	* .7575	*
	* 1.8517	* 2.1010	* 2.2772	* 2.1603	* 1.9146	* 2.0292	* 3.7233	*
14	* 1.2343	* 1.4966	* 1.4912	* 1.3904	* .9201	* .7575	*	*
	* 2.2642	* 1.8923	* 1.9052	* 2.0448	* 3.0797	* 3.7233	*	*
15	* .7748	* .9504	* .8464	* .7597	* F-SUB-Q			
	* 3.5708	* 2.9396	* 3.3192	* 3.6948	* M-SUB-Q			

AT 75% POWER, 470 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8139	* 1.1401	* 1.3145	* 1.5497	* 1.3839	* 1.5269	* 1.2387	* .7781
	* 3.1954	* 2.2875	* 1.9880	* 1.6939	* 1.8905	* 1.7164	* 2.1025	* 3.3186
9	* 1.1401	* 1.2571	* 1.5204	* 1.3795	* 1.5399	* 1.3427	* 1.5074	* .9526
	* 2.2875	* 2.0825	* 1.7323	* 1.9001	* 1.7068	* 1.9488	* 1.7490	* 2.7282
10	* 1.3145	* 1.5215	* 1.3720	* 1.5367	* 1.3373	* 1.2484	* 1.5042	* .8518
	* 1.9880	* 1.7310	* 1.9210	* 1.7238	* 1.9770	* 2.1174	* 1.7644	* 3.0728
11	* 1.5497	* 1.3795	* 1.5378	* 1.3557	* 1.5237	* 1.3416	* 1.4077	* .7662
	* 1.6939	* 1.8989	* 1.7222	* 1.9551	* 1.7667	* 1.9997	* 1.8927	* 3.4291
12	* 1.3839	* 1.5399	* 1.3362	* 1.5226	* 1.4056	* 1.5291	* .9341	*
	* 1.8905	* 1.7065	* 1.9782	* 1.7667	* 1.9276	* 1.7677	* 2.8506	*
13	* 1.5269	* 1.3427	* 1.2484	* 1.3416	* 1.5302	* 1.4446	* .7716	*
	* 1.7164	* 1.9492	* 2.1174	* 1.9996	* 1.7677	* 1.8739	* 3.4489	*
14	* 1.2387	* 1.5074	* 1.5042	* 1.4077	* .9331	* .7716	*	*
	* 2.1025	* 1.7490	* 1.7641	* 1.8927	* 2.8530	* 3.4489	*	*
15	* .7781	* .9547	* .8518	* .7662	* F-SUB-Q			
	* 3.3186	* 2.7234	* 3.0728	* 3.4291	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 117 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 470 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8171	* 1.1466	* 1.3199	* 1.5529	* 1.3893	* 1.5302	* 1.2452	* .7813
	* 2.9888	* 2.1306	* 1.8571	* 1.5864	* 1.7681	* 1.6086	* 1.9656	* 3.1029
9	* 1.1466	* 1.2636	* 1.5248	* 1.3850	* 1.5432	* 1.3492	* 1.5118	* .9580
	* 2.1306	* 1.9393	* 1.6192	* 1.7758	* 1.5980	* 1.8222	* 1.6360	* 2.5486
10	* 1.3199	* 1.5258	* 1.3795	* 1.5432	* 1.3449	* 1.2560	* 1.5107	* .8572
	* 1.8571	* 1.6175	* 1.7907	* 1.6095	* 1.8454	* 1.9726	* 1.6455	* 2.8632
11	* 1.5529	* 1.3861	* 1.5432	* 1.3655	* 1.5345	* 1.3546	* 1.4164	* .7716
	* 1.5864	* 1.7748	* 1.6081	* 1.8285	* 1.6523	* 1.8664	* 1.7724	* 3.1999
12	* 1.3893	* 1.5443	* 1.3438	* 1.5345	* 1.4196	* 1.5443	* .9439	*
	* 1.7681	* 1.5977	* 1.8465	* 1.6524	* 1.7986	* 1.6505	* 2.6606	*
13	* 1.5302	* 1.3481	* 1.2560	* 1.3546	* 1.5443	* 1.4597	* .7813	*
	* 1.6086	* 1.8232	* 1.9726	* 1.8663	* 1.6505	* 1.7498	* 3.2171	*
14	* 1.2452	* 1.5118	* 1.5107	* 1.4164	* .9439	* .7813	*	*
	* 1.9656	* 1.6360	* 1.6455	* 1.7724	* 2.6606	* 3.2171	*	*
15	* .7813	* .9602	* .8572	* .7716	* F-SUB-Q			
	* 3.1029	* 2.5445	* 2.8632	* 3.1977	* M-SUB-Q			

AT 75% POWER, 470 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8344	* 1.1704	* 1.3503	* 1.5985	* 1.4218	* 1.5746	* 1.2733	* .7987
	* 2.7575	* 1.9743	* 1.7210	* 1.4606	* 1.6384	* 1.4819	* 1.8233	* 2.8822
9	* 1.1704	* 1.2918	* 1.5692	* 1.4164	* 1.5887	* 1.3795	* 1.5594	* .9818
	* 1.9743	* 1.7959	* 1.4890	* 1.6456	* 1.4713	* 1.6883	* 1.5017	* 2.3583
10	* 1.3503	* 1.5714	* 1.4121	* 1.5898	* 1.3752	* 1.2853	* 1.5573	* .8800
	* 1.7210	* 1.4878	* 1.6557	* 1.4782	* 1.7055	* 1.8219	* 1.5090	* 2.6414
11	* 1.5985	* 1.4175	* 1.5898	* 1.3980	* 1.5844	* 1.3915	* 1.4630	* .7911
	* 1.4606	* 1.6447	* 1.4771	* 1.6871	* 1.5137	* 1.7192	* 1.6190	* 2.9463
12	* 1.4218	* 1.5898	* 1.3741	* 1.5844	* 1.4587	* 1.5963	* .9699	*
	* 1.6384	* 1.4706	* 1.7064	* 1.5137	* 1.6485	* 1.5055	* 2.4527	*
13	* 1.5746	* 1.3785	* 1.2853	* 1.3915	* 1.5963	* 1.5107	* .8041	*
	* 1.4819	* 1.6892	* 1.8219	* 1.7182	* 1.5055	* 1.5907	* 2.9575	*
14	* 1.2733	* 1.5594	* 1.5573	* 1.4641	* .9699	* .8041	*	*
	* 1.8233	* 1.5013	* 1.5090	* 1.6190	* 2.4531	* 2.9550	*	*
15	* .7987	* .9829	* .8800	* .7911	* F-SUB-Q			
	* 2.8822	* 2.3548	* 2.6414	* 2.9463	* M-SUB-Q			

CNEI-0400-24
Appendix A, Rev. 18
Page 118 of 268

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

	H	G	F	E	D	C	B	A
8	* .8485	* 1.1910	* 1.3752	* 1.6321	* 1.4489	* 1.6082	* 1.2972	* .8128
	* 2.5897	* 1.8546	* 1.6165	* 1.3691	* 1.5386	* 1.3887	* 1.7119	* 2.7102
9	* 1.1910	* 1.3167	* 1.6028	* 1.4435	* 1.6223	* 1.4066	* 1.5930	* 1.0003
	* 1.8546	* 1.6860	* 1.3951	* 1.5442	* 1.3783	* 1.5847	* 1.4052	* 2.2146
10	* 1.3752	* 1.6039	* 1.4402	* 1.6234	* 1.4023	* 1.3102	* 1.5909	* .8973
	* 1.6165	* 1.3939	* 1.5526	* 1.3823	* 1.5971	* 1.7067	* 1.4103	* 2.4752
11	* 1.6321	* 1.4446	* 1.6245	* 1.4251	* 1.6201	* 1.4218	* 1.4955	* .8063
	* 1.3691	* 1.5434	* 1.3817	* 1.5723	* 1.3915	* 1.5832	* 1.5047	* 2.7595
12	* 1.4489	* 1.6234	* 1.4012	* 1.6201	* 1.4901	* 1.6342	* .9905	*
	* 1.5386	* 1.3779	* 1.5980	* 1.3915	* 1.5135	* 1.3835	* 2.2648	*
13	* 1.6082	* 1.4056	* 1.3102	* 1.4218	* 1.6342	* 1.5464	* .8204	*
	* 1.3887	* 1.5855	* 1.7067	* 1.5832	* 1.3835	* 1.4622	* 2.7311	*
14	* 1.2972	* 1.5930	* 1.5909	* 1.4955	* .9905	* .8214	*	*
	* 1.7119	* 1.4050	* 1.4103	* 1.5047	* 2.2648	* 2.7291	*	*
15	* .8128	* 1.0013	* .8973	* .8063	* F-SUB-Q			
	* 2.7102	* 2.2104	* 2.4752	* 2.7595	* M-SUB-Q			

	H	G	F	E	D	C	B	A
8	* .8540	* 1.2029	* 1.3882	* 1.6429	* 1.4652	* 1.6190	* 1.3113	* .8193
	* 2.4621	* 1.7557	* 1.5290	* 1.2978	* 1.4544	* 1.3191	* 1.6266	* 2.5921
9	* 1.2029	* 1.3286	* 1.6104	* 1.4587	* 1.6331	* 1.4229	* 1.5995	* 1.0078
	* 1.7557	* 1.5947	* 1.3221	* 1.4592	* 1.3063	* 1.4988	* 1.3381	* 2.1137
10	* 1.3882	* 1.6125	* 1.4543	* 1.6342	* 1.4175	* 1.3243	* 1.6006	* .9038
	* 1.5290	* 1.3205	* 1.4640	* 1.3061	* 1.5033	* 1.6114	* 1.3377	* 2.3562
11	* 1.6429	* 1.4597	* 1.6342	* 1.4413	* 1.6331	* 1.4392	* 1.5009	* .8117
	* 1.2978	* 1.4585	* 1.3055	* 1.4791	* 1.3124	* 1.4886	* 1.4263	* 2.6244
12	* 1.4652	* 1.6331	* 1.4164	* 1.6321	* 1.5085	* 1.6461	* 1.0013	*
	* 1.4544	* 1.3058	* 1.5040	* 1.3124	* 1.4206	* 1.3047	* 2.1346	*
13	* 1.6190	* 1.4218	* 1.3243	* 1.4392	* 1.6461	* 1.5562	* .8279	*
	* 1.3191	* 1.5001	* 1.6114	* 1.4880	* 1.3047	* 1.3813	* 2.5795	*
14	* 1.3113	* 1.5995	* 1.6006	* 1.5009	* 1.0003	* .8279	*	
	* 1.6266	* 1.3381	* 1.3377	* 1.4262	* 2.1346	* 2.5774	*	
15	* .8193	* 1.0089	* .9038	* .8117	* F-SUB-Q			
	* 2.5921	* 2.1096	* 2.3562	* 2.6225	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 119 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 470 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8691	* 1.2257	* 1.4142	* 1.6743	* 1.4955	* 1.6526	* 1.3373	* .8323
	* 2.3312	* 1.6588	* 1.4444	* 1.2241	* 1.3696	* 1.2425	* 1.5344	* 2.4603
9	* 1.2257	* 1.3535	* 1.6375	* 1.4879	* 1.6646	* 1.4532	* 1.6277	* 1.0230
	* 1.6588	* 1.5069	* 1.2499	* 1.3761	* 1.2321	* 1.4111	* 1.2641	* 2.0059
10	* 1.4142	* 1.6396	* 1.4825	* 1.6635	* 1.4467	* 1.3514	* 1.6331	* .9201
	* 1.4444	* 1.2485	* 1.3810	* 1.2327	* 1.4169	* 1.5195	* 1.2613	* 2.2301
11	* 1.6743	* 1.4890	* 1.6646	* 1.4695	* 1.6656	* 1.4717	* 1.5280	* .8236
	* 1.2241	* 1.3749	* 1.2323	* 1.3955	* 1.2354	* 1.3989	* 1.3484	* 2.4915
12	* 1.4955	* 1.6646	* 1.4457	* 1.6656	* 1.5432	* 1.6808	* 1.0208	*
	* 1.3696	* 1.2316	* 1.4182	* 1.2354	* 1.3339	* 1.2280	* 2.0144	*
13	* 1.6526	* 1.4532	* 1.3514	* 1.4717	* 1.6808	* 1.5865	* .8431	*
	* 1.2425	* 1.4118	* 1.5188	* 1.3983	* 1.2280	* 1.3018	* 2.4375	*
14	* 1.3373	* 1.6288	* 1.6331	* 1.5280	* 1.0208	* .8442	*	*
	* 1.5344	* 1.2637	* 1.2613	* 1.3478	* 2.0156	* 2.4375	*	*
15	* .8323	* 1.0241	* .9201	* .8236	* F-SUB-Q			
	* 2.4603	* 2.0033	* 2.2301	* 2.4915	* M-SUB-Q			

AT 75% POWER, 470 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8442	* 1.1932	* 1.3741	* 1.6104	* 1.4630	* 1.5974	* 1.3059	* .8063
	* 2.3383	* 1.6581	* 1.4436	* 1.2352	* 1.3599	* 1.2485	* 1.5269	* 2.4735
9	* 1.1932	* 1.3156	* 1.5714	* 1.4489	* 1.6017	* 1.4207	* 1.5605	* .9840
	* 1.6581	* 1.5067	* 1.2645	* 1.3721	* 1.2424	* 1.4019	* 1.2809	* 2.0293
10	* 1.3741	* 1.5735	* 1.4413	* 1.5974	* 1.4088	* 1.3167	* 1.5714	* .8876
	* 1.4436	* 1.2630	* 1.3793	* 1.2464	* 1.4131	* 1.5150	* 1.2728	* 2.2508
11	* 1.6104	* 1.4500	* 1.5974	* 1.4283	* 1.6039	* 1.4392	* 1.4641	* .7922
	* 1.2352	* 1.3715	* 1.2459	* 1.3936	* 1.2451	* 1.3885	* 1.3671	* 2.5225
12	* 1.4630	* 1.6028	* 1.4077	* 1.6039	* 1.5085	* 1.6169	* .9927	*
	* 1.3599	* 1.2419	* 1.4138	* 1.2451	* 1.3240	* 1.2390	* 2.0148	*
13	* 1.5974	* 1.4196	* 1.3167	* 1.4402	* 1.6169	* 1.5248	* .8171	*
	* 1.2485	* 1.4025	* 1.5150	* 1.3885	* 1.2390	* 1.3149	* 2.4486	*
14	* 1.3059	* 1.5605	* 1.5714	* 1.4641	* .9927	* .8171	*	*
	* 1.5269	* 1.2809	* 1.2728	* 1.3671	* 2.0159	* 2.4483	*	*
15	* .8063	* .9851	* .8876	* .7922	* F-SUB-Q			
	* 2.4735	* 2.0267	* 2.2508	* 2.5225	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 120 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 470 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7521	* 1.0057	* 1.1563	* 1.4131	* 1.2885	* 1.3947	* 1.1487	* .7098
	* 2.5726	* 1.9290	* 1.6797	* 1.3768	* 1.5103	* 1.3982	* 1.7013	* 2.7579
9	* 1.0057	* 1.1140	* 1.3774	* 1.2224	* 1.4077	* 1.2278	* 1.3546	* .8355
	* 1.9290	* 1.7433	* 1.4119	* 1.5916	* 1.3839	* 1.5891	* 1.4458	* 2.3431
10	* 1.1563	* 1.3785	* 1.2202	* 1.3991	* 1.1867	* 1.1086	* 1.3395	* .7651
	* 1.6797	* 1.4107	* 1.5933	* 1.3919	* 1.6411	* 1.7613	* 1.4635	* 2.5589
11	* 1.4131	* 1.2235	* 1.4001	* 1.2029	* 1.4088	* 1.2690	* 1.2647	* .6892
	* 1.3768	* 1.5908	* 1.3913	* 1.6215	* 1.3866	* 1.5417	* 1.5518	* 2.8459
12	* 1.2885	* 1.4077	* 1.1867	* 1.4088	* 1.3286	* 1.4099	* .8745	*
	* 1.5103	* 1.3833	* 1.6420	* 1.3866	* 1.4727	* 1.3913	* 2.2413	*
13	* 1.3947	* 1.2267	* 1.1097	* 1.2701	* 1.4099	* 1.3004	* .7163	*
	* 1.3982	* 1.5899	* 1.7603	* 1.5416	* 1.3913	* 1.5106	* 2.7401	*
14	* 1.1487	* 1.3546	* 1.3395	* 1.2647	* .8745	* .7163	*	*
	* 1.7013	* 1.4458	* 1.4635	* 1.5518	* 2.2413	* 2.7380	*	*
15	* .7098	* .8366	* .7662	* .6892	F-SUB-Q			
	* 2.7579	* 2.3413	* 2.5589	* 2.8436	M-SUB-Q			

AT 75% POWER, 470 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .5700	* .5310	* .6047	* .6903	* .6524	* .6806	* .5863	* .3934
	* 3.3521	* 3.6030	* 3.1615	* 2.7752	* 2.9368	* 2.8234	* 3.2828	* 4.9113
9	* .5310	* .5928	* .6708	* .6296	* .6871	* .6285	* .6210	* .4270
	* 3.6030	* 3.2249	* 2.8516	* 3.0418	* 2.7872	* 3.0533	* 3.1001	* 4.5192
10	* .6047	* .6719	* .6253	* .6827	* .6155	* .5689	* .6123	* .4248
	* 3.1615	* 2.8490	* 3.0626	* 2.8069	* 3.1124	* 3.3801	* 3.1484	* 4.5512
11	* .6903	* .6307	* .6827	* .6253	* .6871	* .6329	* .5776	* .3760
	* 2.7752	* 3.0393	* 2.8044	* 3.0743	* 2.7997	* 3.0426	* 3.3409	* 5.1461
12	* .6524	* .6871	* .6155	* .6871	* .6611	* .6470	* .4920	*
	* 2.9368	* 2.7872	* 3.1124	* 2.7997	* 2.9108	* 2.9779	* 3.9268	*
13	* .6806	* .6285	* .5689	* .6329	* .6470	* .5971	* .3988	*
	* 2.8234	* 3.0533	* 3.3796	* 3.0426	* 2.9779	* 3.2345	* 4.8533	*
14	* .5863	* .6210	* .6123	* .5776	* .4920	* .3988	*	*
	* 3.2828	* 3.1001	* 3.1484	* 3.3409	* 3.9268	* 4.8533	*	*
15	* .3934	* .4281	* .4248	* .3760	F-SUB-Q			
	* 4.9113	* 4.5127	* 4.5512	* 5.1461	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 121 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .5180 *	* .4736 *	* .4855 *	* .5093 *	* .4887 *	* .5072 *	* .4519 *	* .2948 *
	* 3.3526 *	* 4.2915 *	* 4.5317 *	* 4.1937 *	* 4.5083 *	* 4.2140 *	* 4.8757 *	* 7.4244 *
9	* .4736 *	* .4909 *	* .5126 *	* .4844 *	* .5104 *	* .4877 *	* .4552 *	* .3089 *
	* 4.2915 *	* 4.3201 *	* 4.1572 *	* 4.5452 *	* 4.1854 *	* 4.5217 *	* 4.6874 *	* 7.0900 *
10	* .4855 *	* .5137 *	* .4822 *	* .4877 *	* .4714 *	* .4617 *	* .4400 *	* .2969 *
	* 4.5317 *	* 4.1531 *	* 4.5547 *	* 4.3684 *	* 4.6698 *	* 4.7705 *	* 4.8301 *	* 7.3263 *
11	* .5093 *	* .4844 *	* .4877 *	* .4443 *	* .4270 *	* .4194 *	* .3782 *	* .2438 *
	* 4.1937 *	* 4.5452 *	* 4.3640 *	* 4.9307 *	* 4.6335 *	* 5.0214 *	* 5.5762 *	* 8.8515 *
12	* .4887 *	* .5104 *	* .4725 *	* .4270 *	* .3284 *	* .3110 *	* .2904 *	
	* 4.5083 *	* 4.1854 *	* 4.6604 *	* 4.6335 *	* 4.9050 *	* 5.0237 *	* 6.6206 *	
13	* .5072 *	* .4877 *	* .4617 *	* .4194 *	* .3121 *	* .2525 *	* .1907 *	
	* 4.2140 *	* 4.5217 *	* 4.7705 *	* 5.0214 *	* 5.0237 *	* 5.7031 *	* 8.8615 *	
14	* .4519 *	* .4552 *	* .4400 *	* .3782 *	* .2904 *	* .1907 *		
	* 4.8757 *	* 4.6874 *	* 4.8301 *	* 5.5823 *	* 6.6206 *	* 8.8615 *		
15	* .2948 *	* .3089 *	* .2969 *	* .2438 *	F-SUB-Q			
	* 7.4244 *	* 7.0684 *	* 7.3371 *	* 8.8666 *	M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7185 *	* 1.1466 *	* 1.1401 *	* .9298 *	* 1.0707 *	* .9504 *	* .9775 *	* .5874 *
	* 2.3335 *	* 1.8339 *	* 2.0153 *	* 2.4034 *	* 2.1546 *	* 2.3560 *	* 2.3528 *	* 3.9005 *
9	* 1.1466 *	* 1.1336 *	* .9764 *	* 1.0772 *	* .9656 *	* 1.1314 *	* 1.0046 *	* .6795 *
	* 1.8339 *	* 1.8561 *	* 2.2619 *	* 2.1392 *	* 2.3107 *	* 2.0362 *	* 2.2235 *	* 3.3686 *
10	* 1.1401 *	* .9764 *	* 1.0642 *	* .8984 *	* 1.1086 *	* 1.1249 *	* .9732 *	* .5624 *
	* 2.0153 *	* 2.2630 *	* 2.1610 *	* 2.4850 *	* 2.0723 *	* 2.0420 *	* 2.2885 *	* 4.0538 *
11	* .9298 *	* 1.0783 *	* .9006 *	* .9591 *	* .8659 *	* .9775 *	* .8680 *	* .4768 *
	* 2.4034 *	* 2.1371 *	* 2.4794 *	* 2.3517 *	* 2.4759 *	* 2.2237 *	* 2.5367 *	* 4.7279 *
12	* 1.0707 *	* .9656 *	* 1.1086 *	* .8659 *	* .6751 *	* .7174 *	* .5614 *	
	* 2.1546 *	* 2.3130 *	* 2.0732 *	* 2.4759 *	* 2.2352 *	* 2.3848 *	* 3.5655 *	
13	* .9504 *	* 1.1303 *	* 1.1249 *	* .9775 *	* .7174 *	* .5700 *	* .3739 *	
	* 2.3560 *	* 2.0371 *	* 2.0420 *	* 2.2226 *	* 2.3848 *	* 2.6238 *	* 4.7219 *	
14	* .9775 *	* 1.0046 *	* .9742 *	* .8680 *	* .5624 *	* .3739 *		
	* 2.3528 *	* 2.2235 *	* 2.2896 *	* 2.5379 *	* 3.5630 *	* 4.7175 *		
15	* .5874 *	* .6795 *	* .5624 *	* .4768 *	F-SUB-Q			
	* 3.9005 *	* 3.3612 *	* 4.0570 *	* 4.7279 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 122 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8767	* 1.4283	* 1.4131	* 1.1617	* 1.3145	* 1.1964	* 1.2181	* .7217
	* 2.0007	* 1.5297	* 1.6781	* 1.9890	* 1.8162	* 1.9350	* 1.9555	* 3.2863
9	* 1.4283	* 1.4045	* 1.2289	* 1.3286	* 1.2235	* 1.4121	* 1.2842	* .8507
	* 1.5297	* 1.5475	* 1.8543	* 1.7957	* 1.8808	* 1.6841	* 1.7961	* 2.7818
10	* 1.4131	* 1.2289	* 1.3124	* 1.1249	* 1.3861	* 1.4153	* 1.2528	* .6903
	* 1.6781	* 1.8559	* 1.8133	* 2.0530	* 1.7086	* 1.6730	* 1.8332	* 3.4008
11	* 1.1617	* 1.3308	* 1.1260	* 1.1845	* 1.1043	* 1.2311	* 1.1249	* .5928
	* 1.9890	* 1.7943	* 2.0520	* 1.9573	* 2.0007	* 1.8237	* 2.0195	* 3.9374
12	* 1.3145	* 1.2235	* 1.3861	* 1.1043	* .8431	* .9276	* .6957	*
	* 1.8162	* 1.8808	* 1.7105	* 2.0005	* 1.8480	* 1.9180	* 2.9801	*
13	* 1.1964	* 1.4110	* 1.4153	* 1.2322	* .9276	* .7478	* .4638	*
	* 1.9350	* 1.6842	* 1.6730	* 1.8229	* 1.9171	* 2.0838	* 3.9451	*
14	* 1.2181	* 1.2842	* 1.2538	* 1.1249	* .6968	* .4638	*	*
	* 1.9555	* 1.7967	* 1.8338	* 2.0186	* 2.9799	* 3.9420	*	*
15	* .7217	* .8529	* .6914	* .5928	* F-SUB-Q			
	* 3.2863	* 2.7783	* 3.3960	* 3.9374	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9699	* 1.5995	* 1.5898	* 1.3481	* 1.5009	* 1.3926	* 1.3936	* .8117
	* 1.9036	* 1.4339	* 1.5470	* 1.7757	* 1.6482	* 1.7176	* 1.7706	* 3.0265
9	* 1.5995	* 1.5757	* 1.4099	* 1.5118	* 1.4186	* 1.6028	* 1.5020	* .9699
	* 1.4339	* 1.4471	* 1.6837	* 1.6375	* 1.6788	* 1.5337	* 1.5861	* 2.5274
10	* 1.5898	* 1.4088	* 1.4901	* 1.3059	* 1.5746	* 1.6071	* 1.4684	* .7878
	* 1.5470	* 1.6857	* 1.6586	* 1.8299	* 1.5591	* 1.5253	* 1.6178	* 3.0905
11	* 1.3481	* 1.5128	* 1.3059	* 1.3503	* 1.2864	* 1.4164	* 1.3243	* .6784
	* 1.7757	* 1.6352	* 1.8292	* 1.7790	* 1.7815	* 1.6478	* 1.7763	* 3.5740
12	* 1.5009	* 1.4175	* 1.5724	* 1.2864	* .9797	* 1.0978	* .7987	*
	* 1.6482	* 1.6794	* 1.5601	* 1.7815	* 1.6598	* 1.6889	* 2.7100	*
13	* 1.3926	* 1.6017	* 1.6071	* 1.4164	* 1.0989	* .9016	* .5343	*
	* 1.7176	* 1.5357	* 1.5253	* 1.6472	* 1.6889	* 1.8148	* 3.5817	*
14	* 1.3936	* 1.5020	* 1.4684	* 1.3254	* .7987	* .5343	*	*
	* 1.7706	* 1.5861	* 1.6167	* 1.7756	* 2.7086	* 3.5792	*	*
15	* .8117	* .9721	* .7878	* .6795	* F-SUB-Q			
	* 3.0265	* 2.5231	* 3.0905	* 3.5688	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 123 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0100	* 1.6646	* 1.6602	* 1.4446	* 1.5930	* 1.4933	* 1.4793	* .8518
	* 1.9559	* 1.4622	* 1.5509	* 1.7340	* 1.6270	* 1.6737	* 1.7433	* 3.0168
9	* 1.6646	* 1.6418	* 1.4901	* 1.5952	* 1.5139	* 1.6917	* 1.6125	* 1.0241
	* 1.4622	* 1.4740	* 1.6692	* 1.6230	* 1.6415	* 1.5206	* 1.5420	* 2.5039
10	* 1.6602	* 1.4901	* 1.5724	* 1.3969	* 1.6602	* 1.6949	* 1.5779	* .8344
	* 1.5509	* 1.6698	* 1.6454	* 1.7885	* 1.5469	* 1.5117	* 1.5710	* 3.0526
11	* 1.4446	* 1.5974	* 1.3969	* 1.4305	* 1.3795	* 1.5096	* 1.4294	* .7217
	* 1.7340	* 1.6208	* 1.7877	* 1.7588	* 1.7408	* 1.6243	* 1.7132	* 3.5080
12	* 1.5930	* 1.5139	* 1.6591	* 1.3795	* 1.0620	* 1.1953	* .8529	*
	* 1.6270	* 1.6421	* 1.5480	* 1.7408	* 1.6266	* 1.6348	* 2.6761	*
13	* 1.4933	* 1.6906	* 1.6949	* 1.5096	* 1.1953	* .9970	* .5733	*
	* 1.6737	* 1.5224	* 1.5117	* 1.6237	* 1.6342	* 1.7465	* 3.5355	*
14	* 1.4793	* 1.6125	* 1.5779	* 1.4305	* .8529	* .5733	*	*
	* 1.7433	* 1.5420	* 1.5699	* 1.7125	* 2.6747	* 3.5330	*	*
15	* .8518	* 1.0263	* .8344	* .7217	* F-SUB-Q			
	* 3.0168	* 2.4997	* 3.0505	* 3.5052	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0382	* 1.6949	* 1.6927	* 1.4955	* 1.6440	* 1.5486	* 1.5269	* .8745
	* 2.0575	* 1.5354	* 1.6126	* 1.7615	* 1.6601	* 1.6946	* 1.7775	* 3.0926
9	* 1.6949	* 1.6721	* 1.5280	* 1.6407	* 1.5670	* 1.7404	* 1.6732	* 1.0534
	* 1.5354	* 1.5450	* 1.7235	* 1.6668	* 1.6675	* 1.5555	* 1.5598	* 2.5624
10	* 1.6927	* 1.5280	* 1.6136	* 1.4457	* 1.7079	* 1.7437	* 1.6396	* .8605
	* 1.6126	* 1.7235	* 1.6961	* 1.8194	* 1.5849	* 1.5476	* 1.5882	* 3.1159
11	* 1.4955	* 1.6418	* 1.4467	* 1.4749	* 1.4348	* 1.5659	* 1.4912	* .7467
	* 1.7615	* 1.6643	* 1.8186	* 1.8005	* 1.7652	* 1.6558	* 1.7337	* 3.5828
12	* 1.6440	* 1.5670	* 1.7057	* 1.4348	* 1.1227	* 1.2571	* .8876	*
	* 1.6601	* 1.6682	* 1.5860	* 1.7652	* 1.6610	* 1.6586	* 2.7405	*
13	* 1.5486	* 1.7383	* 1.7448	* 1.5670	* 1.2582	* 1.0609	* .5993	*
	* 1.6946	* 1.5566	* 1.5476	* 1.6552	* 1.6581	* 1.7691	* 3.6314	*
14	* 1.5269	* 1.6732	* 1.6396	* 1.4912	* .8876	* .6004	*	*
	* 1.7775	* 1.5598	* 1.5870	* 1.7330	* 2.7388	* 3.6314	*	*
15	* .8745	* 1.0555	* .8615	* .7467	* F-SUB-Q			
	* 3.0926	* 2.5580	* 3.1118	* 3.5773	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 124 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0609	* 1.7296	* 1.7296	* 1.5421	* 1.6949	* 1.5985	* 1.5746	* .8984
	* 2.1723	* 1.6105	* 1.6902	* 1.8255	* 1.7224	* 1.7513	* 1.8379	* 3.2075
9	* 1.7296	* 1.7068	* 1.5638	* 1.6873	* 1.6169	* 1.7924	* 1.7296	* 1.0826
	* 1.6105	* 1.6163	* 1.7887	* 1.7335	* 1.7266	* 1.6159	* 1.6089	* 2.6589
10	* 1.7296	* 1.5649	* 1.6570	* 1.4912	* 1.7599	* 1.7979	* 1.6960	* .8886
	* 1.6902	* 1.7909	* 1.7684	* 1.8859	* 1.6486	* 1.6080	* 1.6383	* 3.2280
11	* 1.5421	* 1.6895	* 1.4923	* 1.5215	* 1.4868	* 1.6255	* 1.5486	* .7727
	* 1.8255	* 1.7315	* 1.8851	* 1.8631	* 1.8043	* 1.6967	* 1.7873	* 3.7160
12	* 1.6949	* 1.6169	* 1.7578	* 1.4868	* 1.1715	* 1.3156	* .9233	*
	* 1.7224	* 1.7279	* 1.6504	* 1.8043	* 1.7083	* 1.6993	* 2.8282	*
13	* 1.5985	* 1.7903	* 1.7979	* 1.6255	* 1.3156	* 1.1205	* .6275	*
	* 1.7513	* 1.6176	* 1.6080	* 1.6961	* 1.6986	* 1.8096	* 3.7487	*
14	* 1.5746	* 1.7307	* 1.6971	* 1.5497	* .9244	* .6275	*	*
	* 1.8379	* 1.6089	* 1.6371	* 1.7858	* 2.8264	* 3.7456	*	*
15	* .8984	* 1.0848	* .8886	* .7727	* F-SUB-Q			
	* 3.2075	* 2.6512	* 3.2301	* 3.7160	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0609	* 1.7328	* 1.7350	* 1.5659	* 1.7133	* 1.6245	* 1.5909	* .9038
	* 2.3436	* 1.7344	* 1.8266	* 1.9643	* 1.8543	* 1.8765	* 1.9723	* 3.4576
9	* 1.7328	* 1.7101	* 1.5790	* 1.7025	* 1.6440	* 1.8109	* 1.7610	* 1.0913
	* 1.7344	* 1.7410	* 1.9189	* 1.8729	* 1.8516	* 1.7365	* 1.7185	* 2.8528
10	* 1.7350	* 1.5800	* 1.6700	* 1.5150	* 1.7784	* 1.8174	* 1.7296	* .8984
	* 1.8266	* 1.9206	* 1.9158	* 2.0299	* 1.7739	* 1.7269	* 1.7470	* 3.4452
11	* 1.5659	* 1.7047	* 1.5161	* 1.5389	* 1.5183	* 1.6548	* 1.5855	* .7824
	* 1.9643	* 1.8713	* 2.0289	* 1.9649	* 1.9032	* 1.7894	* 1.8829	* 3.9564
12	* 1.7133	* 1.6429	* 1.7762	* 1.5183	* 1.1964	* 1.3546	* .9428	*
	* 1.8543	* 1.8524	* 1.7760	* 1.9032	* 1.8036	* 1.7918	* 2.9794	*
13	* 1.6245	* 1.8087	* 1.8174	* 1.6559	* 1.3546	* 1.1617	* .6437	*
	* 1.8765	* 1.7385	* 1.7269	* 1.7887	* 1.7918	* 1.9140	* 3.9778	*
14	* 1.5909	* 1.7610	* 1.7296	* 1.5865	* .9439	* .6448	*	*
	* 1.9723	* 1.7185	* 1.7476	* 1.8821	* 2.9774	* 3.9778	*	*
15	* .9038	* 1.0935	* .8995	* .7824	* F-SUB-Q			
	* 3.4576	* 2.8474	* 3.4426	* 3.9530	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 125 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0718	* 1.7502	* 1.7534	* 1.5898	* 1.7393	* 1.6516	* 1.6136	* .9136
	* 2.5845	* 1.9057	* 1.9830	* 2.1212	* 1.9866	* 2.0232	* 2.1029	* 3.6884
9	* 1.7502	* 1.7274	* 1.5985	* 1.7263	* 1.6732	* 1.8380	* 1.7914	* 1.1043
	* 1.9057	* 1.9104	* 2.0993	* 2.0134	* 2.0019	* 1.8625	* 1.8491	* 3.0464
10	* 1.7534	* 1.5995	* 1.6927	* 1.5410	* 1.8087	* 1.8477	* 1.7632	* .9136
	* 1.9830	* 2.1012	* 2.0766	* 2.1968	* 1.9092	* 1.8573	* 1.8832	* 3.6887
11	* 1.5898	* 1.7274	* 1.5421	* 1.5670	* 1.5540	* 1.6949	* 1.6245	* .7976
	* 2.1212	* 2.0116	* 2.1957	* 2.1210	* 2.0649	* 1.9249	* 2.0366	* 4.2317
12	* 1.7393	* 1.6721	* 1.8054	* 1.5540	* 1.2289	* 1.3980	* .9699	*
	* 1.9866	* 2.0036	* 1.9116	* 2.0649	* 1.9427	* 1.9353	* 3.1970	*
13	* 1.6516	* 1.8358	* 1.8477	* 1.6960	* 1.3991	* 1.2083	* .6676	*
	* 2.0232	* 1.8647	* 1.8573	* 1.9241	* 1.9353	* 2.0592	* 4.2559	*
14	* 1.6136	* 1.7924	* 1.7632	* 1.6255	* .9710	* .6676	*	*
	* 2.1029	* 1.8498	* 1.8824	* 2.0356	* 3.1970	* 4.2559	*	*
15	* .9136	* 1.1075	* .9146	* .7976	* F-SUB-Q			
	* 3.6884	* 3.0403	* 3.6857	* 4.2317	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0750	* 1.7458	* 1.7458	* 1.5811	* 1.7318	* 1.6418	* 1.6071	* .9092
	* 2.9182	* 2.1482	* 2.2286	* 2.3762	* 2.1959	* 2.2545	* 2.3253	* 4.0678
9	* 1.7458	* 1.7231	* 1.5930	* 1.7177	* 1.6689	* 1.8336	* 1.7849	* 1.0978
	* 2.1482	* 2.1492	* 2.3788	* 2.2412	* 2.2295	* 2.0533	* 2.0578	* 3.3590
10	* 1.7458	* 1.5930	* 1.6862	* 1.5367	* 1.8076	* 1.8477	* 1.7599	* .9125
	* 2.2286	* 2.3801	* 2.3256	* 2.4609	* 2.1099	* 2.0479	* 2.0891	* 4.0297
11	* 1.5811	* 1.7198	* 1.5378	* 1.5714	* 1.5649	* 1.7133	* 1.6342	* .7998
	* 2.3762	* 2.2390	* 2.4609	* 2.3732	* 2.3143	* 2.1382	* 2.2710	* 4.6213
12	* 1.7318	* 1.6678	* 1.8054	* 1.5649	* 1.2506	* 1.4261	* .9862	*
	* 2.1959	* 2.2306	* 2.1109	* 2.3143	* 2.1802	* 2.1835	* 3.5732	*
13	* 1.6418	* 1.8315	* 1.8477	* 1.7144	* 1.4261	* 1.2452	* .6849	*
	* 2.2545	* 2.0559	* 2.0479	* 2.1373	* 2.1835	* 2.3208	* 4.7497	*
14	* 1.6071	* 1.7849	* 1.7599	* 1.6342	* .9873	* .6849	*	*
	* 2.3253	* 2.0578	* 2.0891	* 2.2699	* 3.5705	* 4.7447	*	*
15	* .9092	* 1.1000	* .9136	* .7998	* F-SUB-Q			
	* 4.0678	* 3.3517	* 4.0297	* 4.6213	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 126 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1184	* 1.7903	* 1.7805	* 1.6125	* 1.7588	* 1.6754	* 1.6288	* .9179
	* 3.1888	* 2.3451	* 2.4294	* 2.5935	* 2.3876	* 2.4523	* 2.5095	* 4.3945
9	* 1.7903	* 1.7643	* 1.6353	* 1.7437	* 1.7079	* 1.8650	* 1.8239	* 1.1108
	* 2.3451	* 2.3451	* 2.6000	* 2.4398	* 2.4382	* 2.2333	* 2.2335	* 3.6230
10	* 1.7805	* 1.6353	* 1.7177	* 1.5746	* 1.8477	* 1.8856	* 1.8054	* .9287
	* 2.4294	* 2.6014	* 2.5445	* 2.6888	* 2.3046	* 2.2365	* 2.2743	* 4.3708
11	* 1.6125	* 1.7458	* 1.5757	* 1.6147	* 1.6288	* 1.7805	* 1.6960	* .8171
	* 2.5935	* 2.4372	* 2.6902	* 2.5900	* 2.5426	* 2.3415	* 2.4780	* 5.0230
12	* 1.7588	* 1.7068	* 1.8445	* 1.6288	* 1.3384	* 1.5215	* 1.0338	*
	* 2.3876	* 2.4395	* 2.3081	* 2.5426	* 2.3871	* 2.4046	* 3.9275	*
13	* 1.6754	* 1.8629	* 1.8856	* 1.7816	* 1.5215	* 1.3546	* .7282	*
	* 2.4523	* 2.2364	* 2.2365	* 2.3404	* 2.4033	* 2.5738	* 5.2587	*
14	* 1.6288	* 1.8250	* 1.8054	* 1.6971	* 1.0338	* .7282	*	*
	* 2.5095	* 2.2315	* 2.2743	* 2.4766	* 3.9242	* 5.2587	*	*
15	* .9179	* 1.1130	* .9298	* .8182	* F-SUB-Q			
	* 4.3945	* 3.6146	* 4.3744	* 5.0277	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2159	* 1.8325	* 1.8054	* 1.6212	* 1.7664	* 1.6841	* 1.6321	* .9168
	* 3.3558	* 2.4653	* 2.5525	* 2.7538	* 2.5250	* 2.6209	* 2.6854	* 4.7580
9	* 1.8325	* 1.8000	* 1.6646	* 1.7513	* 1.7263	* 1.8781	* 1.8380	* 1.1108
	* 2.4653	* 2.4653	* 2.7457	* 2.5763	* 2.6165	* 2.3948	* 2.4101	* 3.9457
10	* 1.8054	* 1.6635	* 1.7328	* 1.5930	* 1.8694	* 1.9062	* 1.8250	* .9352
	* 2.5525	* 2.7473	* 2.6747	* 2.8705	* 2.4653	* 2.3985	* 2.4634	* 4.7823
11	* 1.6212	* 1.7534	* 1.5930	* 1.6483	* 1.6841	* 1.8434	* 1.7404	* .8279
	* 2.7538	* 2.5735	* 2.8687	* 2.6993	* 2.6597	* 2.4308	* 2.6224	* 5.5520
12	* 1.7664	* 1.7253	* 1.8672	* 1.6841	* 1.5085	* 1.6342	* 1.0794	*
	* 2.5250	* 2.6180	* 2.4692	* 2.6597	* 2.4822	* 2.5165	* 4.0830	*
13	* 1.6841	* 1.8759	* 1.9062	* 1.8445	* 1.6353	* 1.4933	* .7738	*
	* 2.6209	* 2.3960	* 2.3985	* 2.4295	* 2.5151	* 2.6966	* 5.5063	*
14	* 1.6321	* 1.8380	* 1.8260	* 1.7415	* 1.0794	* .7738	*	*
	* 2.6854	* 2.4101	* 2.4634	* 2.6209	* 4.0830	* 5.4999	*	*
15	* .9168	* 1.1140	* .9363	* .8290	* F-SUB-Q			
	* 4.7580	* 3.9357	* 4.7823	* 5.5454	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 127 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3330	* 1.8585	* 1.8130	* 1.6104	* 1.7545	* 1.6711	* 1.6190	* .9092
	* 3.5384	* 2.5958	* 2.6815	* 2.8333	* 2.5858	* 2.6954	* 2.7473	* 4.8667
9	* 1.8585	* 1.8434	* 1.6754	* 1.7404	* 1.7231	* 1.8726	* 1.8282	* 1.1000
	* 2.5958	* 2.6001	* 2.8943	* 2.6409	* 2.6907	* 2.4511	* 2.4769	* 4.0430
10	* 1.8130	* 1.6743	* 1.7296	* 1.5920	* 1.8748	* 1.9138	* 1.8228	* .9320
	* 2.6815	* 2.8979	* 2.7409	* 2.9542	* 2.5247	* 2.4562	* 2.5315	* 4.8971
11	* 1.6104	* 1.7437	* 1.5920	* 1.6787	* 1.7198	* 1.8867	* 1.7621	* .8301
	* 2.8333	* 2.6380	* 2.9524	* 2.8265	* 2.7880	* 2.5384	* 2.7441	* 5.6837
12	* 1.7545	* 1.7220	* 1.8715	* 1.7198	* 1.7653	* 1.7578	* 1.1130	*
	* 2.5858	* 2.6923	* 2.5274	* 2.7880	* 2.6073	* 2.6469	* 4.2666	*
13	* 1.6711	* 1.8705	* 1.9149	* 1.8878	* 1.7588	* 1.6180	* .8095	*
	* 2.6954	* 2.4524	* 2.4562	* 2.5370	* 2.6454	* 2.8419	* 5.7673	*
14	* 1.6190	* 1.8293	* 1.8228	* 1.7632	* 1.1140	* .8106	*	*
	* 2.7473	* 2.4769	* 2.5302	* 2.7425	* 4.2628	* 5.7602	*	*
15	* .9092	* 1.1032	* .9331	* .8312	* F-SUB-Q			
	* 4.8667	* 4.0327	* 4.8971	* 5.6837	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3871	* 1.9030	* 1.8466	* 1.6310	* 1.7751	* 1.6917	* 1.6353	* .9157
	* 3.4021	* 2.4813	* 2.5584	* 2.7765	* 2.5384	* 2.6424	* 2.6954	* 4.7681
9	* 1.9030	* 1.8976	* 1.7112	* 1.7621	* 1.7523	* 1.8997	* 1.8596	* 1.1097
	* 2.4813	* 2.4892	* 2.7546	* 2.5943	* 2.6439	* 2.4122	* 2.4283	* 3.9580
10	* 1.8466	* 1.7101	* 1.7567	* 1.6190	* 1.9149	* 1.9637	* 1.8564	* .9461
	* 2.5584	* 2.7545	* 2.6807	* 2.8979	* 2.4617	* 2.4039	* 2.4834	* 4.7973
11	* 1.6310	* 1.7653	* 1.6201	* 1.7448	* 1.7784	* 1.9539	* 1.8163	* .8464
	* 2.7765	* 2.5915	* 2.8961	* 2.6785	* 2.6427	* 2.4097	* 2.5918	* 5.5110
12	* 1.7751	* 1.7513	* 1.9127	* 1.7784	* 1.8921	* 1.8661	* 1.1596	*
	* 2.5384	* 2.6454	* 2.4643	* 2.6427	* 2.4727	* 2.4949	* 4.0068	*
13	* 1.6917	* 1.8965	* 1.9647	* 1.9539	* 1.8661	* 1.7339	* .8529	*
	* 2.6424	* 2.4134	* 2.4027	* 2.4085	* 2.4963	* 2.6642	* 5.3767	*
14	* 1.6353	* 1.8596	* 1.8564	* 1.8163	* 1.1606	* .8529	*	*
	* 2.6954	* 2.4283	* 2.4821	* 2.5903	* 4.0034	* 5.3640	*	*
15	* .9157	* 1.1130	* .9461	* .8475	* F-SUB-Q			
	* 4.7681	* 3.9481	* 4.7924	* 5.5110	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 128 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3871	* 1.8986	* 1.8390	* 1.6245	* 1.7643	* 1.6852	* 1.6234	* .9049
	* 3.1731	* 2.3133	* 2.3839	* 2.5614	* 2.3500	* 2.4461	* 2.5063	* 4.4465
9	* 1.8986	* 1.8954	* 1.7112	* 1.7523	* 1.7513	* 1.8911	* 1.8585	* 1.1010
	* 2.3133	* 2.3213	* 2.5591	* 2.3989	* 2.4392	* 2.2372	* 2.2470	* 3.6852
10	* 1.8390	* 1.7090	* 1.7491	* 1.6255	* 1.9192	* 1.9691	* 1.8575	* .9407
	* 2.3839	* 2.5634	* 2.4793	* 2.6658	* 2.2908	* 2.2341	* 2.2906	* 4.4322
11	* 1.6245	* 1.7556	* 1.6245	* 1.7610	* 1.7957	* 1.9702	* 1.8315	* .8453
	* 2.5614	* 2.3965	* 2.6643	* 2.4894	* 2.4470	* 2.2328	* 2.3996	* 5.1231
12	* 1.7643	* 1.7502	* 1.9171	* 1.7946	* 1.9312	* 1.9062	* 1.1736	*
	* 2.3500	* 2.4405	* 2.2930	* 2.4470	* 2.2933	* 2.3115	* 3.7239	*
13	* 1.6852	* 1.8878	* 1.9702	* 1.9713	* 1.9062	* 1.7816	* .8691	*
	* 2.4461	* 2.2406	* 2.2331	* 2.2317	* 2.3103	* 2.4665	* 5.0007	*
14	* 1.6234	* 1.8585	* 1.8575	* 1.8325	* 1.1736	* .8691	*	*
	* 2.5063	* 2.2470	* 2.2881	* 2.3984	* 3.7239	* 5.0065	*	*
15	* .9049	* 1.1043	* .9417	* .8453	* F-SUB-Q			
	* 4.4465	* 3.6737	* 4.4280	* 5.1299	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3687	* 1.8715	* 1.8109	* 1.5995	* 1.7361	* 1.6602	* 1.5952	* .8876
	* 2.9820	* 2.1712	* 2.2384	* 2.3790	* 2.1848	* 2.2722	* 2.3361	* 4.1543
9	* 1.8715	* 1.8694	* 1.6884	* 1.7242	* 1.7285	* 1.8629	* 1.8336	* 1.0815
	* 2.1712	* 2.1782	* 2.4024	* 2.2291	* 2.2608	* 2.0783	* 2.0847	* 3.4419
10	* 1.8109	* 1.6862	* 1.7231	* 1.6104	* 1.8986	* 1.9496	* 1.8358	* .9266
	* 2.2384	* 2.4023	* 2.2974	* 2.4704	* 2.1277	* 2.0751	* 2.1213	* 4.1272
11	* 1.5995	* 1.7274	* 1.6082	* 1.7480	* 1.7827	* 1.9582	* 1.8184	* .8334
	* 2.3790	* 2.2259	* 2.4691	* 2.3437	* 2.2980	* 2.0986	* 2.2514	* 4.7555
12	* 1.7361	* 1.7274	* 1.8965	* 1.7827	* 1.9279	* 1.9041	* 1.1671	*
	* 2.1848	* 2.2619	* 2.1305	* 2.2980	* 2.1550	* 2.1701	* 3.5074	*
13	* 1.6602	* 1.8596	* 1.9507	* 1.9582	* 1.9041	* 1.7849	* .8670	*
	* 2.2722	* 2.0801	* 2.0751	* 2.0977	* 2.1680	* 2.3178	* 4.7218	*
14	* 1.5952	* 1.8347	* 1.8358	* 1.8195	* 1.1671	* .8680	*	*
	* 2.3361	* 2.0858	* 2.1213	* 2.2504	* 3.5048	* 4.7120	*	*
15	* .8876	* 1.0848	* .9266	* .8344	* F-SUB-Q			
	* 4.1543	* 3.4318	* 4.1316	* 4.7613	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 129 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3362	* 1.8239	* 1.7632	* 1.5529	* 1.6884	* 1.6125	* 1.5519	* .8637
	* 2.8013	* 2.0462	* 2.1022	* 2.2487	* 2.0620	* 2.1518	* 2.2105	* 3.9419
9	* 1.8239	* 1.8217	* 1.6407	* 1.6776	* 1.6808	* 1.8152	* 1.7827	* 1.0512
	* 2.0462	* 2.0506	* 2.2673	* 2.1016	* 2.1317	* 1.9583	* 1.9743	* 3.2677
10	* 1.7632	* 1.6396	* 1.6776	* 1.5681	* 1.8542	* 1.9051	* 1.7859	* .9027
	* 2.1022	* 2.2701	* 2.1573	* 2.3282	* 1.9981	* 1.9481	* 2.0027	* 3.9046
11	* 1.5529	* 1.6808	* 1.5670	* 1.7101	* 1.7404	* 1.9160	* 1.7740	* .8128
	* 2.2487	* 2.0988	* 2.3270	* 2.2226	* 2.1753	* 1.9806	* 2.1310	* 4.4811
12	* 1.6884	* 1.6797	* 1.8520	* 1.7404	* 1.8889	* 1.8640	* 1.1433	*
	* 2.0620	* 2.1327	* 2.0015	* 2.1753	* 2.0472	* 2.0634	* 3.3330	*
13	* 1.6125	* 1.8119	* 1.9062	* 1.9171	* 1.8640	* 1.7491	* .8496	*
	* 2.1518	* 1.9600	* 1.9481	* 1.9797	* 2.0643	* 2.2080	* 4.4962	*
14	* 1.5519	* 1.7827	* 1.7859	* 1.7740	* 1.1433	* .8507	*	*
	* 2.2105	* 1.9743	* 2.0037	* 2.1300	* 3.3281	* 4.4962	*	*
15	* .8637	* 1.0544	* .9027	* .8128	* F-SUB-Q			
	* 3.9419	* 3.2587	* 3.8974	* 4.4862	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3059	* 1.7892	* 1.7296	* 1.5291	* 1.6570	* 1.5876	* 1.5204	* .8420
	* 2.6370	* 1.9009	* 1.9527	* 2.1115	* 1.9406	* 2.0220	* 2.0926	* 3.7509
9	* 1.7892	* 1.7870	* 1.6158	* 1.6451	* 1.6570	* 1.7805	* 1.7588	* 1.0295
	* 1.9009	* 1.9125	* 2.0928	* 1.9756	* 1.9939	* 1.8416	* 1.8514	* 3.0960
10	* 1.7296	* 1.6147	* 1.6461	* 1.5475	* 1.8217	* 1.8737	* 1.7621	* .8843
	* 1.9527	* 2.0946	* 2.0169	* 2.1731	* 1.8676	* 1.8246	* 1.8727	* 3.6844
11	* 1.5291	* 1.6483	* 1.5454	* 1.6808	* 1.7187	* 1.8889	* 1.7545	* .7954
	* 2.1115	* 1.9731	* 2.1721	* 2.0932	* 2.0257	* 1.8514	* 1.9728	* 4.2184
12	* 1.6570	* 1.6559	* 1.8195	* 1.7187	* 1.8650	* 1.8466	* 1.1249	*
	* 1.9406	* 1.9947	* 1.8723	* 2.0275	* 1.9082	* 1.9255	* 3.1348	*
13	* 1.5876	* 1.7773	* 1.8748	* 1.8900	* 1.8466	* 1.7361	* .8377	*
	* 2.0220	* 1.8431	* 1.8246	* 1.8507	* 1.9247	* 2.0581	* 4.2294	*
14	* 1.5204	* 1.7588	* 1.7632	* 1.7556	* 1.1260	* .8388	*	*
	* 2.0926	* 1.8514	* 1.8720	* 1.9720	* 3.1327	* 4.2334	*	*
15	* .8420	* 1.0317	* .8843	* .7965	* F-SUB-Q			
	* 3.7509	* 3.0879	* 3.6844	* 4.2146	* M-SUB-Q			

CNEI-0400-24
Appendix A, Rev. 18
Page 130 of 268

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

	H	G	F	E	D	C	B	A
8	1.2582	1.7231	1.6646	1.4706	1.5930	1.5258	1.4587	.8063
	2.4806	1.8147	1.8672	2.0428	1.8807	1.9622	2.0378	3.6697
9	1.7231	1.7220	1.5562	1.5822	1.5941	1.7122	1.6906	.9862
	1.8147	1.8175	2.0077	1.9097	1.9219	1.7776	1.7960	3.0256
10	1.6646	1.5551	1.5833	1.4890	1.7534	1.8033	1.6949	.8475
	1.8672	2.0089	1.9371	2.0934	1.7931	1.7553	1.8090	3.5835
11	1.4706	1.5855	1.4879	1.6169	1.6559	1.8195	1.6884	.7629
	2.0428	1.9074	2.0925	1.9914	1.9363	1.7662	1.8963	4.0846
12	1.5930	1.5930	1.7513	1.6559	1.7979	1.7794	1.0826	
	1.8807	1.9227	1.7958	1.9380	1.8203	1.8397	2.9915	
13	1.5258	1.7090	1.8044	1.8206	1.7805	1.6721	.8063	
	1.9622	1.7812	1.7553	1.7655	1.8397	1.9801	4.0690	
14	1.4587	1.6906	1.6949	1.6895	1.0837	.8063		
	2.0378	1.7960	1.8098	1.8956	2.9896	4.0690		
15	.8063	.9883	.8485	.7629	F-SUB-Q			
	3.6697	3.0178	3.5808	4.0768	M-SUB-Q			

	H	G	F	E	D	C	B	A
8	* 1.1888	* 1.6212	* 1.5638	* 1.3709	* 1.4923	* 1.4207	* 1.3633	* .7543
	* 2.4485	* 1.7904	* 1.8361	* 2.0597	* 1.8868	* 1.9842	* 2.0579	* 3.7046
9	* 1.6212	* 1.6212	* 1.4554	* 1.4825	* 1.4868	* 1.6050	* 1.5714	* .9190
	* 1.7904	* 1.8064	* 1.9800	* 1.9113	* 1.9301	* 1.7796	* 1.8185	* 3.0648
10	* 1.5638	* 1.4543	* 1.4847	* 1.3882	* 1.6440	* 1.6906	* 1.5746	* .7900
	* 1.8361	* 1.9816	* 1.9250	* 2.0956	* 1.7819	* 1.7477	* 1.8261	* 3.6174
11	* 1.3709	* 1.4858	* 1.3871	* 1.5150	* 1.5443	* 1.7036	* 1.5692	* .7098
	* 2.0597	* 1.9090	* 2.0947	* 1.9848	* 1.9470	* 1.7668	* 1.8997	* 4.1000
12	* 1.4923	* 1.4858	* 1.6429	* 1.5443	* 1.6819	* 1.6570	* 1.0122	*
	* 1.8868	* 1.9309	* 1.7861	* 1.9470	* 1.8049	* 1.8385	* 2.9934	*
13	* 1.4207	* 1.6017	* 1.6906	* 1.7036	* 1.6581	* 1.5519	* .7521	*
	* 1.9842	* 1.7823	* 1.7477	* 1.7661	* 1.8370	* 1.9781	* 4.0596	*
14	* 1.3633	* 1.5714	* 1.5746	* 1.5692	* 1.0122	* .7532	*	*
	* 2.0579	* 1.8185	* 1.8261	* 1.8989	* 2.9894	* 4.0523	*	*
15	* .7543	* .9211	* .7911	* .7109	* F-SUB-Q			
	* 3.7046	* 3.0568	* 3.6146	* 4.0964	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 131 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1195	* 1.5248	* 1.4684	* 1.2831	* 1.4023	* 1.3264	* 1.2712	* .7033
	* 2.4208	* 1.7741	* 1.8342	* 2.0879	* 1.9062	* 2.0208	* 2.1033	* 3.7947
9	* 1.5248	* 1.5237	* 1.3622	* 1.3926	* 1.3871	* 1.5020	* 1.4587	* .8518
	* 1.7741	* 1.7766	* 1.9820	* 1.9290	* 1.9590	* 1.8002	* 1.8617	* 3.1513
10	* 1.4684	* 1.3611	* 1.3936	* 1.2961	* 1.5399	* 1.5800	* 1.4597	* .7337
	* 1.8342	* 1.9847	* 1.9333	* 2.1193	* 1.7929	* 1.7535	* 1.8675	* 3.7062
11	* 1.2831	* 1.3958	* 1.2950	* 1.4186	* 1.4392	* 1.5930	* 1.4543	* .6578
	* 2.0879	* 1.9232	* 2.1172	* 1.9935	* 1.9485	* 1.7661	* 1.9239	* 4.2009
12	* 1.4023	* 1.3861	* 1.5389	* 1.4392	* 1.5757	* 1.5432	* .9450	*
	* 1.9062	* 1.9598	* 1.7965	* 1.9485	* 1.8266	* 1.8722	* 3.0304	*
13	* 1.3264	* 1.4998	* 1.5811	* 1.5930	* 1.5432	* 1.4392	* .7012	*
	* 2.0208	* 1.8038	* 1.7528	* 1.7655	* 1.8715	* 2.0182	* 4.1337	*
14	* 1.2712	* 1.4587	* 1.4608	* 1.4554	* .9450	* .7022	*	*
	* 2.1033	* 1.8617	* 1.8684	* 1.9231	* 3.0285	* 4.1261	*	*
15	* .7033	* .8540	* .7337	* .6578	* F-SUB-Q			
	* 3.7947	* 3.1428	* 3.7032	* 4.1926	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9959	* 1.3427	* 1.2983	* 1.1401	* 1.2582	* 1.1682	* 1.1227	* .6210
	* 2.5686	* 1.9131	* 1.9763	* 2.2542	* 2.0384	* 2.2043	* 2.2936	* 4.1496
9	* 1.3427	* 1.3416	* 1.1953	* 1.2430	* 1.2137	* 1.3243	* 1.2582	* .7423
	* 1.9131	* 1.9137	* 2.1524	* 2.0692	* 2.1446	* 1.9600	* 2.0667	* 3.4810
10	* 1.2983	* 1.1942	* 1.2430	* 1.1433	* 1.3568	* 1.3839	* 1.2538	* .6372
	* 1.9763	* 2.1543	* 2.0734	* 2.2944	* 1.9414	* 1.9078	* 2.0869	* 4.0975
11	* 1.1401	* 1.2452	* 1.1433	* 1.2636	* 1.2571	* 1.4012	* 1.2495	* .5700
	* 2.2542	* 2.0634	* 2.2933	* 2.1125	* 2.1167	* 1.9046	* 2.1348	* 4.6356
12	* 1.2582	* 1.2127	* 1.3557	* 1.2571	* 1.3980	* 1.3470	* .8323	*
	* 2.0384	* 2.1455	* 1.9448	* 2.1167	* 1.9386	* 2.0220	* 3.2526	*
13	* 1.1682	* 1.3221	* 1.3850	* 1.4023	* 1.3470	* 1.2419	* .6166	*
	* 2.2043	* 1.9625	* 1.9071	* 1.9038	* 2.0220	* 2.2258	* 4.4715	*
14	* 1.1227	* 1.2582	* 1.2538	* 1.2495	* .8323	* .6166	*	*
	* 2.2936	* 2.0647	* 2.0880	* 2.1339	* 3.2553	* 4.4766	*	*
15	* .6210	* .7445	* .6372	* .5711	* F-SUB-Q			
	* 4.1496	* 3.4733	* 4.1018	* 4.6310	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 132 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7954 *	* .9807 *	* .9623 *	* .9244 *	* 1.0154 *	* .9255 *	* .8778 *	* .4942 *
	* 3.1050 *	* 2.5285 *	* 2.5768 *	* 2.6873 *	* 2.4467 *	* 2.6944 *	* 2.8483 *	* 5.0794 *
9	* .9807 *	* .9851 *	* .9352 *	* .9515 *	* .9472 *	* .9992 *	* .9656 *	* .5679 *
	* 2.5285 *	* 2.5144 *	* 2.6554 *	* 2.6112 *	* 2.6585 *	* 2.5138 *	* 2.6127 *	* 4.4178 *
10	* .9623 *	* .9341 *	* .9547 *	* .9179 *	* 1.0003 *	* 1.0046 *	* .9450 *	* .4963 *
	* 2.5768 *	* 2.6569 *	* 2.6030 *	* 2.7547 *	* 2.5395 *	* 2.5357 *	* 2.6825 *	* 5.1069 *
11	* .9244 *	* .9526 *	* .9168 *	* .9612 *	* .9840 *	* 1.0848 *	* .9493 *	* .4487 *
	* 2.6873 *	* 2.6033 *	* 2.7511 *	* 2.6638 *	* 2.6158 *	* 2.3727 *	* 2.7134 *	* 5.7195 *
12	* 1.0154 *	* .9472 *	* 1.0003 *	* .9851 *	* 1.1130 *	* 1.0577 *	* .6621 *	
	* 2.4467 *	* 2.6600 *	* 2.5409 *	* 2.6158 *	* 2.3277 *	* 2.4688 *	* 3.9374 *	
13	* .9255 *	* .9981 *	* 1.0057 *	* 1.0859 *	* 1.0577 *	* .9493 *	* .4887 *	
	* 2.6944 *	* 2.5164 *	* 2.5327 *	* 2.3700 *	* 2.4704 *	* 2.7814 *	* 5.4088 *	
14	* .8778 *	* .9656 *	* .9450 *	* .9493 *	* .6632 *	* .4887 *		
	* 2.8483 *	* 2.6127 *	* 2.6825 *	* 2.7118 *	* 3.9301 *	* 5.3950 *		
15	* .4942 *	* .5689 *	* .4963 *	* .4487 *	F-SUB-Q			
	* 5.0794 *	* 4.4187 *	* 5.0947 *	* 5.7042 *	M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .5137 *	* .4031 *	* .4205 *	* .4671 *	* .4367 *	* .4606 *	* .3890 *	* .2373 *
	* 4.6888 *	* 5.9461 *	* 5.7121 *	* 5.1289 *	* 5.5023 *	* 5.2352 *	* 6.2252 *	* 10.2472 *
9	* .4031 *	* .4270 *	* .4595 *	* .4291 *	* .4682 *	* .4302 *	* .4064 *	* .2525 *
	* 5.9461 *	* 5.6206 *	* 5.2083 *	* 5.5952 *	* 5.1413 *	* 5.6248 *	* 6.0073 *	* 9.6897 *
10	* .4205 *	* .4595 *	* .4237 *	* .4617 *	* .4259 *	* .4107 *	* .3999 *	* .2482 *
	* 5.7121 *	* 5.2153 *	* 5.6762 *	* 5.2573 *	* 5.7345 *	* 6.0117 *	* 6.1343 *	* 9.8978 *
11	* .4671 *	* .4302 *	* .4617 *	* .4432 *	* .4844 *	* .4487 *	* .3825 *	* .2178 *
	* 5.1289 *	* 5.6033 *	* 5.2515 *	* 5.6019 *	* 5.1177 *	* 5.5425 *	* 6.5151 *	* 11.4112 *
12	* .4367 *	* .4682 *	* .4259 *	* .4844 *	* .4617 *	* .4487 *	* .3262 *	
	* 5.5023 *	* 5.1413 *	* 5.7345 *	* 5.1177 *	* 5.4061 *	* 5.6033 *	* 7.7248 *	
13	* .4606 *	* .4302 *	* .4118 *	* .4487 *	* .4487 *	* .3923 *	* .2406 *	
	* 5.2352 *	* 5.6100 *	* 6.0117 *	* 5.5425 *	* 5.6033 *	* 6.4488 *	* 10.5932 *	
14	* .3890 *	* .4064 *	* .3999 *	* .3825 *	* .3262 *	* .2406 *		
	* 6.2252 *	* 5.9997 *	* 6.1343 *	* 6.5151 *	* 7.6969 *	* 10.5932 *		
15	* .2373 *	* .2525 *	* .2482 *	* .2178 *	F-SUB-Q			
	* 10.2472 *	* 9.6458 *	* 9.8520 *	* 11.4112 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 133 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 50 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .4443 *	* .4194 *	* .4432 *	* .4714 *	* .4508 *	* .4649 *	* .4086 *	* .2644 *
	* 4.0062 *	* 5.0711 *	* 5.0271 *	* 4.5811 *	* 4.9253 *	* 4.6259 *	* 5.4122 *	* 8.3240 *
9	* .4194 *	* .4432 *	* .4649 *	* .4476 *	* .4692 *	* .4465 *	* .4118 *	* .2774 *
	* 5.0711 *	* 5.0213 *	* 4.6461 *	* 4.9700 *	* 4.5910 *	* 4.9644 *	* 5.2027 *	* 7.9034 *
10	* .4432 *	* .4649 *	* .4367 *	* .4519 *	* .4324 *	* .4172 *	* .3966 *	* .2677 *
	* 5.0271 *	* 4.6361 *	* 5.0914 *	* 4.7658 *	* 5.1331 *	* 5.3137 *	* 5.3804 *	* 8.1687 *
11	* .4714 *	* .4476 *	* .4519 *	* .4118 *	* .3923 *	* .3782 *	* .3403 *	* .2200 *
	* 4.5811 *	* 4.9700 *	* 4.7553 *	* 5.3122 *	* 4.9235 *	* 5.3842 *	* 6.1048 *	* 9.8381 *
12	* .4508 *	* .4692 *	* .4324 *	* .3923 *	* .3034 *	* .2818 *	* .2612 *	
	* 4.9253 *	* 4.5910 *	* 5.1331 *	* 4.9198 *	* 5.1984 *	* 5.3684 *	* 7.1331 *	
13	* .4649 *	* .4465 *	* .4172 *	* .3782 *	* .2818 *	* .2297 *	* .1723 *	
	* 4.6259 *	* 4.9644 *	* 5.3137 *	* 5.3842 *	* 5.3684 *	* 6.0847 *	* 9.4925 *	
14	* .4086 *	* .4118 *	* .3966 *	* .3403 *	* .2612 *	* .1723 *		
	* 5.4122 *	* 5.2027 *	* 5.3870 *	* 6.1048 *	* 7.1255 *	* 9.4925 *		
15	* .2644 *	* .2774 *	* .2677 *	* .2200 *	F-SUB-Q			
	* 8.3240 *	* 7.8891 *	* 8.1687 *	* 9.8381 *	M-SUB-Q			

AT 50% POWER, 50 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6264 *	* 1.0176 *	* 1.0317 *	* .8995 *	* 1.0187 *	* .9092 *	* .9060 *	* .5364 *
	* 2.7846 *	* 2.1618 *	* 2.2582 *	* 2.5161 *	* 2.2863 *	* 2.4803 *	* 2.5509 *	* 4.2836 *
9	* 1.0176 *	* 1.0143 *	* .8984 *	* 1.0208 *	* .9081 *	* 1.0425 *	* .9385 *	* .6231 *
	* 2.1618 *	* 2.1643 *	* 2.5023 *	* 2.2827 *	* 2.4726 *	* 2.2217 *	* 2.3928 *	* 3.6855 *
10	* 1.0317 *	* .8995 *	* 1.0013 *	* .8691 *	* 1.0252 *	* 1.0295 *	* .9081 *	* .5223 *
	* 2.2582 *	* 2.5033 *	* 2.3237 *	* 2.5994 *	* 2.2537 *	* 2.2433 *	* 2.4688 *	* 4.3859 *
11	* .8995 *	* 1.0219 *	* .8702 *	* .9157 *	* .8095 *	* .8941 *	* .8030 *	* .4411 *
	* 2.5161 *	* 2.2815 *	* 2.5947 *	* 2.4308 *	* 2.5829 *	* 2.3628 *	* 2.6951 *	* 5.1242 *
12	* 1.0187 *	* .9081 *	* 1.0252 *	* .8095 *	* .6470 *	* .6676 *	* .5169 *	
	* 2.2863 *	* 2.4754 *	* 2.2559 *	* 2.5829 *	* 2.3225 *	* 2.4755 *	* 3.7522 *	
13	* .9092 *	* 1.0425 *	* 1.0295 *	* .8951 *	* .6676 *	* .5375 *	* .3457 *	
	* 2.4803 *	* 2.2230 *	* 2.2411 *	* 2.3615 *	* 2.4755 *	* 2.7188 *	* 4.9356 *	
14	* .9060 *	* .9385 *	* .9081 *	* .8030 *	* .5169 *	* .3457 *		
	* 2.5509 *	* 2.3928 *	* 2.4669 *	* 2.6940 *	* 3.7522 *	* 4.9356 *		
15	* .5364 *	* .6231 *	* .5223 *	* .4411 *	F-SUB-Q			
	* 4.2836 *	* 3.6854 *	* 4.3902 *	* 5.1299 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 134 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 50 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7694	* 1.2755	* 1.2939	* 1.1541	* 1.2777	* 1.1736	* 1.1466	* .6686
	* 2.3939	* 1.8045	* 1.8629	* 2.0231	* 1.8826	* 1.9839	* 2.0911	* 3.5640
9	* 1.2755	* 1.2690	* 1.1509	* 1.2864	* 1.1736	* 1.3178	* 1.2224	* .7911
	* 1.8045	* 1.8042	* 2.0247	* 1.8762	* 1.9757	* 1.8135	* 1.8957	* 3.0082
10	* 1.2939	* 1.1520	* 1.2593	* 1.1151	* 1.2972	* 1.3069	* 1.1899	* .6535
	* 1.8629	* 2.0256	* 1.9168	* 2.0919	* 1.8390	* 1.8224	* 1.9392	* 3.6208
11	* 1.1541	* 1.2874	* 1.1173	* 1.1541	* 1.0523	* 1.1411	* 1.0588	* .5581
	* 2.0231	* 1.8738	* 2.0908	* 1.9891	* 2.0539	* 1.9156	* 2.1120	* 4.2025
12	* 1.2777	* 1.1736	* 1.2972	* 1.0523	* .8269	* .8789	* .6513	*
	* 1.8826	* 1.9748	* 1.8397	* 2.0539	* 1.8905	* 1.9573	* 3.0980	*
13	* 1.1736	* 1.3167	* 1.3069	* 1.1411	* .8800	* .7207	* .4367	*
	* 1.9839	* 1.8149	* 1.8224	* 1.9153	* 1.9570	* 2.1216	* 4.0644	*
14	* 1.1466	* 1.2224	* 1.1910	* 1.0599	* .6513	* .4378	*	*
	* 2.0911	* 1.8965	* 1.9383	* 2.1110	* 3.0959	* 4.0644	*	*
15	* .6686	* .7933	* .6535	* .5581	* F-SUB-Q			
	* 3.5640	* 3.0022	* 3.6150	* 4.1948	* M-SUB-Q			

AT 50% POWER, 50 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8594	* 1.4402	* 1.4717	* 1.3698	* 1.4836	* 1.3947	* 1.3286	* .7608
	* 2.2767	* 1.6836	* 1.7006	* 1.7689	* 1.6846	* 1.7300	* 1.8672	* 3.2431
9	* 1.4402	* 1.4402	* 1.3449	* 1.4890	* 1.3828	* 1.5150	* 1.4532	* .9136
	* 1.6836	* 1.6849	* 1.8044	* 1.6808	* 1.7370	* 1.6359	* 1.6501	* 2.6945
10	* 1.4717	* 1.3470	* 1.4543	* 1.3210	* 1.4912	* 1.4998	* 1.4164	* .7564
	* 1.7006	* 1.8014	* 1.7242	* 1.8288	* 1.6602	* 1.6480	* 1.6868	* 3.2478
11	* 1.3698	* 1.4912	* 1.3232	* 1.3395	* 1.2452	* 1.3264	* 1.2668	* .6491
	* 1.7689	* 1.6795	* 1.8280	* 1.7833	* 1.8050	* 1.7142	* 1.8410	* 3.7610
12	* 1.4836	* 1.3828	* 1.4901	* 1.2452	* .9807	* 1.0588	* .7564	*
	* 1.6846	* 1.7370	* 1.6621	* 1.8045	* 1.6760	* 1.6997	* 2.7873	*
13	* 1.3947	* 1.5139	* 1.4998	* 1.3264	* 1.0588	* .8854	* .5115	*
	* 1.7300	* 1.6371	* 1.6480	* 1.7135	* 1.6997	* 1.8227	* 3.6468	*
14	* 1.3286	* 1.4532	* 1.4175	* 1.2679	* .7575	* .5115	*	*
	* 1.8672	* 1.6501	* 1.6868	* 1.8403	* 2.7862	* 3.6468	*	*
15	* .7608	* .9157	* .7564	* .6491	* F-SUB-Q			
	* 3.2431	* 2.6928	* 3.2432	* 3.7578	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 135 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 50 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9038	* 1.5128	* 1.5659	* 1.4933	* 1.5985	* 1.5204	* 1.4283	* .8095
	* 2.3352	* 1.7012	* 1.6790	* 1.6998	* 1.6405	* 1.6615	* 1.8201	* 3.1969
9	* 1.5128	* 1.5258	* 1.4587	* 1.5995	* 1.5042	* 1.6212	* 1.5822	* .9764
	* 1.7012	* 1.7101	* 1.7435	* 1.6423	* 1.6795	* 1.6089	* 1.5862	* 2.6435
10	* 1.5659	* 1.4608	* 1.5562	* 1.4381	* 1.5920	* 1.5985	* 1.5443	* .8117
	* 1.6790	* 1.7407	* 1.6885	* 1.7604	* 1.6340	* 1.6217	* 1.6206	* 3.1723
11	* 1.4933	* 1.6006	* 1.4392	* 1.4413	* 1.3557	* 1.4283	* 1.3861	* .6990
	* 1.6998	* 1.6411	* 1.7597	* 1.7428	* 1.7384	* 1.6752	* 1.7716	* 3.6712
12	* 1.5985	* 1.5042	* 1.5909	* 1.3557	* 1.0826	* 1.1682	* .8182	*
	* 1.6405	* 1.6807	* 1.6346	* 1.7379	* 1.6237	* 1.6269	* 2.7278	*
13	* 1.5204	* 1.6201	* 1.5985	* 1.4294	* 1.1693	* .9948	* .5570	*
	* 1.6615	* 1.6100	* 1.6217	* 1.6746	* 1.6265	* 1.7345	* 3.5630	*
14	* 1.4283	* 1.5822	* 1.5443	* 1.3861	* .8182	* .5570	*	*
	* 1.8201	* 1.5862	* 1.6212	* 1.7709	* 2.7272	* 3.5601	*	*
15	* .8095	* .9786	* .8117	* .6990	* F-SUB-Q			
	* 3.1969	* 2.6389	* 3.1744	* 3.6682	* M-SUB-Q			

AT 50% POWER, 50 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9331	* 1.5519	* 1.6234	* 1.5692	* 1.6721	* 1.5985	* 1.4901	* .8399
	* 2.4473	* 1.7669	* 1.7238	* 1.7175	* 1.6679	* 1.6766	* 1.8526	* 3.2730
9	* 1.5519	* 1.5746	* 1.5258	* 1.6678	* 1.5811	* 1.6906	* 1.6613	* 1.0154
	* 1.7669	* 1.7751	* 1.7683	* 1.6753	* 1.6961	* 1.6402	* 1.6015	* 2.7031
10	* 1.6234	* 1.5280	* 1.6190	* 1.5107	* 1.6559	* 1.6602	* 1.6223	* .8464
	* 1.7238	* 1.7661	* 1.7270	* 1.7812	* 1.6723	* 1.6619	* 1.6370	* 3.2309
11	* 1.5692	* 1.6689	* 1.5118	* 1.5074	* 1.4261	* 1.4977	* 1.4608	* .7315
	* 1.7175	* 1.6741	* 1.7791	* 1.7696	* 1.7496	* 1.6993	* 1.7787	* 3.7295
12	* 1.6721	* 1.5811	* 1.6537	* 1.4261	* 1.1552	* 1.2452	* .8605	*
	* 1.6679	* 1.6961	* 1.6747	* 1.7494	* 1.6460	* 1.6381	* 2.7780	*
13	* 1.5985	* 1.6895	* 1.6602	* 1.4977	* 1.2452	* 1.0718	* .5895	*
	* 1.6766	* 1.6419	* 1.6619	* 1.6980	* 1.6375	* 1.7413	* 3.6288	*
14	* 1.4901	* 1.6613	* 1.6234	* 1.4619	* .8605	* .5895	*	*
	* 1.8526	* 1.6021	* 1.6364	* 1.7780	* 2.7768	* 3.6278	*	*
15	* .8399	* 1.0176	* .8464	* .7326	* F-SUB-Q			
	* 3.2730	* 2.6983	* 3.2331	* 3.7264	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 136 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 50 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9580	* 1.5941	* 1.6797	* 1.6386	* 1.7437	* 1.6700	* 1.5519	* .8713
	* 2.5666	* 1.8273	* 1.7951	* 1.7650	* 1.7188	* 1.7194	* 1.9066	* 3.3752
9	* 1.5941	* 1.6245	* 1.5876	* 1.7339	* 1.6516	* 1.7588	* 1.7350	* 1.0544
	* 1.8273	* 1.8431	* 1.8282	* 1.7319	* 1.7392	* 1.6903	* 1.6411	* 2.7866
10	* 1.6797	* 1.5898	* 1.6830	* 1.5768	* 1.7209	* 1.7253	* 1.6971	* .8821
	* 1.7951	* 1.8260	* 1.7909	* 1.8313	* 1.7300	* 1.7183	* 1.6762	* 3.3237
11	* 1.6386	* 1.7361	* 1.5779	* 1.5714	* 1.4933	* 1.5659	* 1.5334	* .7651
	* 1.7650	* 1.7312	* 1.8291	* 1.8195	* 1.7815	* 1.7394	* 1.8012	* 3.8339
12	* 1.7437	* 1.6516	* 1.7187	* 1.4933	* 1.2181	* 1.3167	* .9038	*
	* 1.7188	* 1.7378	* 1.7320	* 1.7810	* 1.6823	* 1.6679	* 2.8504	*
13	* 1.6700	* 1.7578	* 1.7253	* 1.5670	* 1.3167	* 1.1433	* .6231	*
	* 1.7194	* 1.6921	* 1.7183	* 1.7387	* 1.6672	* 1.7726	* 3.7270	*
14	* 1.5519	* 1.7350	* 1.6971	* 1.5334	* .9049	* .6231	*	*
	* 1.9066	* 1.6411	* 1.6749	* 1.7994	* 2.8504	* 3.7270	*	*
15	* .8713	* 1.0566	* .8832	* .7651	* F-SUB-Q			
	* 3.3752	* 2.7815	* 3.3260	* 3.8339	* M-SUB-Q			

AT 50% POWER, 50 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9623	* 1.6060	* 1.7025	* 1.6797	* 1.7773	* 1.7133	* 1.5800	* .8832
	* 2.7704	* 1.9673	* 1.9315	* 1.8809	* 1.8366	* 1.8282	* 2.0338	* 3.6154
9	* 1.6060	* 1.6429	* 1.6234	* 1.7653	* 1.6949	* 1.7924	* 1.7805	* 1.0707
	* 1.9673	* 1.9830	* 1.9565	* 1.8559	* 1.8495	* 1.8045	* 1.7422	* 2.9737
10	* 1.7025	* 1.6255	* 1.7133	* 1.6190	* 1.7523	* 1.7556	* 1.7437	* .9016
	* 1.9315	* 1.9539	* 1.9202	* 1.9548	* 1.8532	* 1.8377	* 1.7772	* 3.5269
11	* 1.6797	* 1.7675	* 1.6201	* 1.6050	* 1.5378	* 1.6060	* 1.5822	* .7824
	* 1.8809	* 1.8551	* 1.9523	* 1.9121	* 1.8721	* 1.8268	* 1.8920	* 4.0620
12	* 1.7773	* 1.6949	* 1.7502	* 1.5378	* 1.2560	* 1.3676	* .9320	*
	* 1.8366	* 1.8495	* 1.8538	* 1.8713	* 1.7724	* 1.7548	* 3.0021	*
13	* 1.7133	* 1.7914	* 1.7556	* 1.6071	* 1.3687	* 1.1975	* .6459	*
	* 1.8282	* 1.8065	* 1.8384	* 1.8261	* 1.7551	* 1.8684	* 3.9497	*
14	* 1.5800	* 1.7805	* 1.7437	* 1.5822	* .9320	* .6459	*	*
	* 2.0338	* 1.7422	* 1.7764	* 1.8912	* 3.0001	* 3.9510	*	*
15	* .8832	* 1.0729	* .9016	* .7824	* F-SUB-Q			
	* 3.6154	* 2.9679	* 3.5218	* 4.0551	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 137 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 50 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9764	* 1.6288	* 1.7318	* 1.7187	* 1.8152	* 1.7534	* 1.6125	* .8984
	* 3.0530	* 2.1345	* 2.0811	* 2.0187	* 1.9571	* 1.9565	* 2.1579	* 3.8395
9	* 1.6288	* 1.6689	* 1.6570	* 1.8011	* 1.7350	* 1.8293	* 1.8239	* 1.0924
	* 2.1345	* 2.1484	* 2.1125	* 1.9840	* 1.9806	* 1.9224	* 1.8628	* 3.1566
10	* 1.7318	* 1.6602	* 1.7491	* 1.6591	* 1.7914	* 1.7946	* 1.7892	* .9233
	* 2.0811	* 2.1095	* 2.0617	* 2.1017	* 1.9834	* 1.9666	* 1.9030	* 3.7496
11	* 1.7187	* 1.8033	* 1.6602	* 1.6461	* 1.5855	* 1.6559	* 1.6321	* .8030
	* 2.0187	* 1.9831	* 2.0988	* 2.0598	* 2.0197	* 1.9576	* 2.0440	* 4.3252
12	* 1.8152	* 1.7350	* 1.7892	* 1.5855	* 1.3015	* 1.4251	* .9656	*
	* 1.9571	* 1.9806	* 1.9859	* 2.0197	* 1.9067	* 1.8927	* 3.2154	*
13	* 1.7534	* 1.8282	* 1.7946	* 1.6570	* 1.4261	* 1.2593	* .6751	*
	* 1.9565	* 1.9232	* 1.9666	* 1.9568	* 1.8919	* 2.0040	* 4.2194	*
14	* 1.6125	* 1.8239	* 1.7892	* 1.6321	* .9667	* .6751	*	*
	* 2.1579	* 1.8628	* 1.9030	* 2.0431	* 3.2154	* 4.2155	*	*
15	* .8984	* 1.0945	* .9233	* .8030	* F-SUB-Q			
	* 3.8395	* 3.1501	* 3.7466	* 4.3212	* M-SUB-Q			

AT 50% POWER, 50 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9818	* 1.6288	* 1.7296	* 1.7166	* 1.8163	* 1.7523	* 1.6125	* .8984
	* 3.4292	* 2.3992	* 2.3170	* 2.2482	* 2.1536	* 2.1704	* 2.3711	* 4.2118
9	* 1.6288	* 1.6678	* 1.6537	* 1.8000	* 1.7339	* 1.8293	* 1.8239	* 1.0913
	* 2.3992	* 2.4154	* 2.3705	* 2.1941	* 2.1965	* 2.1127	* 2.0627	* 3.4530
10	* 1.7296	* 1.6570	* 1.7513	* 1.6624	* 1.7989	* 1.8011	* 1.7935	* .9255
	* 2.3170	* 2.3668	* 2.2909	* 2.3419	* 2.1822	* 2.1591	* 2.1018	* 4.0725
11	* 1.7166	* 1.8022	* 1.6635	* 1.6602	* 1.6071	* 1.6841	* 1.6483	* .8095
	* 2.2482	* 2.1921	* 2.3407	* 2.3029	* 2.2800	* 2.1879	* 2.2836	* 4.6924
12	* 1.8163	* 1.7339	* 1.7968	* 1.6071	* 1.3384	* 1.4673	* .9894	*
	* 2.1536	* 2.1965	* 2.1853	* 2.2800	* 2.1382	* 2.1368	* 3.5906	*
13	* 1.7523	* 1.8282	* 1.8022	* 1.6852	* 1.4673	* 1.3124	* .6990	*
	* 2.1704	* 2.1128	* 2.1600	* 2.1868	* 2.1358	* 2.2565	* 4.7041	*
14	* 1.6125	* 1.8250	* 1.7946	* 1.6483	* .9905	* .7001	*	*
	* 2.3711	* 2.0618	* 2.1018	* 2.2825	* 3.5878	* 4.6975	*	*
15	* .8984	* 1.0935	* .9266	* .8106	* F-SUB-Q			
	* 4.2118	* 3.4502	* 4.0757	* 4.6833	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 138 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 50 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0328	* 1.6700	* 1.7588	* 1.7578	* 1.8488	* 1.7935	* 1.6375	* .9081
	* 3.7597	* 2.6265	* 2.5154	* 2.4324	* 2.3278	* 2.3451	* 2.5450	* 4.5214
9	* 1.6700	* 1.7014	* 1.6938	* 1.8315	* 1.7740	* 1.8618	* 1.8715	* 1.1097
	* 2.6265	* 2.6384	* 2.5703	* 2.3738	* 2.3775	* 2.2805	* 2.2256	* 3.7137
10	* 1.7588	* 1.6971	* 1.7870	* 1.7079	* 1.8412	* 1.8423	* 1.8466	* .9461
	* 2.5154	* 2.5660	* 2.4834	* 2.5408	* 2.3731	* 2.3471	* 2.2728	* 4.3944
11	* 1.7578	* 1.8336	* 1.7101	* 1.7133	* 1.6808	* 1.7588	* 1.7166	* .8312
	* 2.4324	* 2.3714	* 2.5394	* 2.5241	* 2.5231	* 2.4118	* 2.5074	* 5.0660
12	* 1.8488	* 1.7751	* 1.8390	* 1.6808	* 1.4597	* 1.5811	* 1.0425	*
	* 2.3278	* 2.3763	* 2.3755	* 2.5231	* 2.3581	* 2.3724	* 3.9701	*
13	* 1.7935	* 1.8607	* 1.8423	* 1.7599	* 1.5811	* 1.4467	* .7499	*
	* 2.3451	* 2.2816	* 2.3471	* 2.4105	* 2.3712	* 2.5110	* 5.2180	*
14	* 1.6375	* 1.8715	* 1.8466	* 1.7166	* 1.0436	* .7499	*	*
	* 2.5450	* 2.2235	* 2.2707	* 2.5048	* 3.9667	* 5.2180	*	*
15	* .9081	* 1.1119	* .9472	* .8312	* F-SUB-Q			
	* 4.5214	* 3.7022	* 4.3907	* 5.0555	* M-SUB-Q			

AT 50% POWER, 50 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1119	* 1.7003	* 1.7664	* 1.7675	* 1.8564	* 1.8033	* 1.6429	* .9081
	* 3.9457	* 2.7483	* 2.5962	* 2.5384	* 2.4145	* 2.4673	* 2.6978	* 4.8616
9	* 1.7003	* 1.7177	* 1.7068	* 1.8390	* 1.7870	* 1.8694	* 1.8856	* 1.1130
	* 2.7483	* 2.7307	* 2.6719	* 2.4614	* 2.4977	* 2.3960	* 2.3758	* 4.0097
10	* 1.7664	* 1.7112	* 1.8000	* 1.7274	* 1.8629	* 1.8607	* 1.8683	* .9537
	* 2.5962	* 2.6673	* 2.5664	* 2.6627	* 2.4994	* 2.4888	* 2.4377	* 4.7580
11	* 1.7675	* 1.8412	* 1.7285	* 1.7491	* 1.7393	* 1.8239	* 1.7599	* .8431
	* 2.5384	* 2.4588	* 2.6612	* 2.6194	* 2.6283	* 2.4968	* 2.6447	* 5.5520
12	* 1.8564	* 1.7859	* 1.8607	* 1.7393	* 1.6429	* 1.7253	* 1.0913	*
	* 2.4145	* 2.4977	* 2.5034	* 2.6283	* 2.4447	* 2.4739	* 4.1334	*
13	* 1.8033	* 1.8683	* 1.8607	* 1.8250	* 1.7253	* 1.6006	* .7987	*
	* 2.4673	* 2.3972	* 2.4888	* 2.4954	* 2.4739	* 2.6387	* 5.4870	*
14	* 1.6429	* 1.8856	* 1.8683	* 1.7610	* 1.0913	* .7987	*	*
	* 2.6978	* 2.3758	* 2.4365	* 2.6432	* 4.1298	* 5.4806	*	*
15	* .9081	* 1.1151	* .9547	* .8431	* F-SUB-Q			
	* 4.8616	* 3.9995	* 4.7580	* 5.5454	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 139 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 50 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1747	* 1.7079	* 1.7534	* 1.7513	* 1.8412	* 1.7870	* 1.6277	* .8995
	* 4.1245	* 2.8696	* 2.6588	* 2.6058	* 2.4665	* 2.5315	* 2.7521	* 4.9590
9	* 1.7079	* 1.7133	* 1.6960	* 1.8239	* 1.7794	* 1.8542	* 1.8726	* 1.1032
	* 2.8696	* 2.7946	* 2.7457	* 2.5166	* 2.5632	* 2.4473	* 2.4371	* 4.0994
10	* 1.7534	* 1.7003	* 1.7914	* 1.7220	* 1.8629	* 1.8607	* 1.8618	* .9493
	* 2.6588	* 2.7409	* 2.6232	* 2.7345	* 2.5549	* 2.5438	* 2.4993	* 4.8617
11	* 1.7513	* 1.8260	* 1.7231	* 1.7675	* 1.7697	* 1.8650	* 1.7762	* .8442
	* 2.6058	* 2.5139	* 2.7313	* 2.7361	* 2.7505	* 2.6029	* 2.7602	* 5.6700
12	* 1.8412	* 1.7784	* 1.8607	* 1.7697	* 1.8596	* 1.8358	* 1.1227	*
	* 2.4665	* 2.5632	* 2.5591	* 2.7505	* 2.5577	* 2.5986	* 4.3096	*
13	* 1.7870	* 1.8531	* 1.8618	* 1.8661	* 1.8369	* 1.7090	* .8323	*
	* 2.5315	* 2.4498	* 2.5438	* 2.6015	* 2.5986	* 2.7716	* 5.7322	*
14	* 1.6277	* 1.8726	* 1.8618	* 1.7762	* 1.1227	* .8334	*	*
	* 2.7521	* 2.4359	* 2.4993	* 2.7586	* 4.3057	* 5.7322	*	*
15	* .8995	* 1.1054	* .9504	* .8442	* F-SUB-Q			
	* 4.9590	* 4.0887	* 4.8617	* 5.6632	* M-SUB-Q			

AT 50% POWER, 50 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1997	* 1.7296	* 1.7664	* 1.7675	* 1.8553	* 1.8044	* 1.6386	* .9038
	* 3.9223	* 2.7235	* 2.5986	* 2.5397	* 2.4109	* 2.4691	* 2.6892	* 4.8417
9	* 1.7296	* 1.7296	* 1.7155	* 1.8380	* 1.8033	* 1.8715	* 1.8954	* 1.1119
	* 2.7235	* 2.7240	* 2.6770	* 2.4614	* 2.5006	* 2.3950	* 2.3768	* 4.0018
10	* 1.7664	* 1.7198	* 1.8087	* 1.7458	* 1.8911	* 1.8976	* 1.8911	* .9612
	* 2.5986	* 2.6724	* 2.5646	* 2.6679	* 2.5043	* 2.4926	* 2.4384	* 4.7393
11	* 1.7675	* 1.8401	* 1.7469	* 1.8228	* 1.8195	* 1.9214	* 1.8206	* .8572
	* 2.5397	* 2.4575	* 2.6664	* 2.5870	* 2.5935	* 2.4612	* 2.5920	* 5.4640
12	* 1.8553	* 1.8022	* 1.8889	* 1.8195	* 1.9539	* 1.9279	* 1.1606	*
	* 2.4109	* 2.4993	* 2.5053	* 2.5935	* 2.4218	* 2.4416	* 4.0310	*
13	* 1.8044	* 1.8694	* 1.8976	* 1.9225	* 1.9279	* 1.8065	* .8702	*
	* 2.4691	* 2.3974	* 2.4913	* 2.4599	* 2.4416	* 2.5890	* 5.3318	*
14	* 1.6386	* 1.8954	* 1.8911	* 1.8217	* 1.1617	* .8702	*	*
	* 2.6892	* 2.3768	* 2.4384	* 2.5906	* 4.0354	* 5.3257	*	*
15	* .9038	* 1.1140	* .9623	* .8583	* F-SUB-Q			
	* 4.8417	* 3.9882	* 4.7393	* 5.4576	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 140 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 50 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1856	* 1.7090	* 1.7426	* 1.7513	* 1.8325	* 1.7892	* 1.6190	* .8897
	* 3.7134	* 2.5686	* 2.4182	* 2.3593	* 2.2488	* 2.2976	* 2.5107	* 4.5315
9	* 1.7090	* 1.7090	* 1.7014	* 1.8152	* 1.7924	* 1.8520	* 1.8835	* 1.0989
	* 2.5686	* 2.5369	* 2.4794	* 2.2922	* 2.3260	* 2.2350	* 2.2062	* 3.7244
10	* 1.7426	* 1.7057	* 1.7903	* 1.7437	* 1.8824	* 1.8900	* 1.8856	* .9537
	* 2.4182	* 2.4773	* 2.3810	* 2.4690	* 2.3257	* 2.3193	* 2.2566	* 4.3968
11	* 1.7513	* 1.8184	* 1.7426	* 1.8250	* 1.8336	* 1.9312	* 1.8250	* .8518
	* 2.3593	* 2.2873	* 2.4664	* 2.4252	* 2.4247	* 2.3012	* 2.4222	* 5.1101
12	* 1.8325	* 1.7914	* 1.8802	* 1.8336	* 1.9745	* 1.9539	* 1.1671	*
	* 2.2488	* 2.3232	* 2.3292	* 2.4247	* 2.2665	* 2.2782	* 3.7753	*
13	* 1.7892	* 1.8499	* 1.8911	* 1.9322	* 1.9539	* 1.8401	* .8789	*
	* 2.2976	* 2.2371	* 2.3166	* 2.3001	* 2.2782	* 2.4138	* 4.9994	*
14	* 1.6190	* 1.8835	* 1.8856	* 1.8260	* 1.1671	* .8800	*	*
	* 2.5107	* 2.2062	* 2.2566	* 2.4209	* 3.7792	* 5.0061	*	*
15	* .8897	* 1.1010	* .9537	* .8529	* F-SUB-Q			
	* 4.5315	* 3.7268	* 4.3927	* 5.1045	* M-SUB-Q			

AT 50% POWER, 50 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1585	* 1.6689	* 1.7003	* 1.7122	* 1.7903	* 1.7491	* 1.5811	* .8680
	* 3.5283	* 2.4402	* 2.2757	* 2.2214	* 2.1153	* 2.1608	* 2.3712	* 4.2787
9	* 1.6689	* 1.6678	* 1.6635	* 1.7729	* 1.7567	* 1.8130	* 1.8455	* 1.0739
	* 2.4402	* 2.3863	* 2.3342	* 2.1580	* 2.1883	* 2.1043	* 2.0730	* 3.5168
10	* 1.7003	* 1.6678	* 1.7502	* 1.7133	* 1.8488	* 1.8575	* 1.8520	* .9331
	* 2.2757	* 2.3279	* 2.2370	* 2.3188	* 2.1826	* 2.1749	* 2.1178	* 4.1401
11	* 1.7122	* 1.7751	* 1.7122	* 1.7968	* 1.8152	* 1.9095	* 1.7979	* .8355
	* 2.2214	* 2.1550	* 2.3176	* 2.3047	* 2.2996	* 2.1841	* 2.2986	* 4.7997
12	* 1.7903	* 1.7556	* 1.8466	* 1.8152	* 1.9528	* 1.9366	* 1.1520	*
	* 2.1153	* 2.1873	* 2.1856	* 2.2996	* 2.1494	* 2.1602	* 3.5927	*
13	* 1.7491	* 1.8098	* 1.8585	* 1.9106	* 1.9366	* 1.8282	* .8702	*
	* 2.1608	* 2.1062	* 2.1749	* 2.1830	* 2.1615	* 2.2903	* 4.7602	*
14	* 1.5811	* 1.8455	* 1.8531	* 1.7989	* 1.1520	* .8713	*	*
	* 2.3712	* 2.0721	* 2.1155	* 2.2974	* 3.5927	* 4.7602	*	*
15	* .8680	* 1.0761	* .9341	* .8355	* F-SUB-Q			
	* 4.2787	* 3.5090	* 4.1313	* 4.7948	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 141 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 50 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1195	* 1.6104	* 1.6396	* 1.6461	* 1.7274	* 1.6830	* 1.5269	* .8388
	* 3.3631	* 2.3296	* 2.1761	* 2.1337	* 2.0244	* 2.0768	* 2.2687	* 4.1050
9	* 1.6104	* 1.6093	* 1.6006	* 1.7101	* 1.6927	* 1.7523	* 1.7784	* 1.0360
	* 2.3296	* 2.2726	* 2.2380	* 2.0647	* 2.1022	* 2.0143	* 1.9881	* 3.3761
10	* 1.6396	* 1.6039	* 1.6884	* 1.6526	* 1.7903	* 1.8000	* 1.7881	* .9006
	* 2.1761	* 2.2337	* 2.1363	* 2.2206	* 2.0789	* 2.0698	* 2.0258	* 3.9625
11	* 1.6461	* 1.7122	* 1.6516	* 1.7404	* 1.7599	* 1.8542	* 1.7393	* .8084
	* 2.1337	* 2.0620	* 2.2211	* 2.2127	* 2.2082	* 2.0907	* 2.2023	* 4.5814
12	* 1.7274	* 1.6917	* 1.7881	* 1.7599	* 1.8965	* 1.8781	* 1.1184	*
	* 2.0244	* 2.0999	* 2.0817	* 2.2082	* 2.0670	* 2.0828	* 3.4575	*
13	* 1.6830	* 1.7491	* 1.8011	* 1.8553	* 1.8781	* 1.7751	* .8464	*
	* 2.0768	* 2.0173	* 2.0711	* 2.0898	* 2.0807	* 2.2090	* 4.5925	*
14	* 1.5269	* 1.7784	* 1.7881	* 1.7404	* 1.1195	* .8464	*	*
	* 2.2687	* 1.9893	* 2.0270	* 2.2012	* 3.4584	* 4.5925	*	*
15	* .8388	* 1.0382	* .9016	* .8084	* F-SUB-Q			
	* 4.1050	* 3.3689	* 3.9625	* 4.5770	* M-SUB-Q			

AT 50% POWER, 50 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0848	* 1.5638	* 1.5898	* 1.6039	* 1.6765	* 1.6418	* 1.4814	* .8106
	* 3.1919	* 2.1880	* 2.0742	* 2.0342	* 1.9383	* 1.9804	* 2.1773	* 3.9608
9	* 1.5638	* 1.5605	* 1.5594	* 1.6581	* 1.6526	* 1.7014	* 1.7372	* 1.0046
	* 2.1880	* 2.1595	* 2.1282	* 1.9732	* 2.0044	* 1.9272	* 1.8906	* 3.2436
10	* 1.5898	* 1.5638	* 1.6386	* 1.6136	* 1.7415	* 1.7523	* 1.7502	* .8756
	* 2.0742	* 2.1244	* 2.0333	* 2.1074	* 1.9762	* 1.9679	* 1.9191	* 3.7854
11	* 1.6039	* 1.6613	* 1.6125	* 1.6938	* 1.7253	* 1.8130	* 1.7047	* .7846
	* 2.0342	* 1.9708	* 2.1055	* 2.1141	* 2.0865	* 1.9848	* 2.0654	* 4.3618
12	* 1.6765	* 1.6516	* 1.7393	* 1.7253	* 1.8531	* 1.8434	* 1.0913	*
	* 1.9383	* 2.0035	* 1.9787	* 2.0865	* 1.9556	* 1.9662	* 3.2964	*
13	* 1.6418	* 1.6982	* 1.7534	* 1.8141	* 1.8434	* 1.7458	* .8258	*
	* 1.9804	* 1.9280	* 1.9679	* 1.9859	* 1.9662	* 2.0864	* 4.3802	*
14	* 1.4814	* 1.7383	* 1.7502	* 1.7057	* 1.0913	* .8269	*	*
	* 2.1773	* 1.8906	* 1.9191	* 2.0645	* 3.2912	* 4.3711	*	*
15	* .8106	* 1.0068	* .8767	* .7846	* F-SUB-Q			
	* 3.9608	* 3.2369	* 3.7824	* 4.3577	* M-SUB-Q			

CNEI-0400-24
Appendix A, Rev. 18
Page 142 of 268

	H	G	F	E	D	C	B	A
8	* .9677 *	* 1.3871 *	* 1.3980 *	* 1.3969 *	* 1.4717 *	* 1.4305 *	* 1.2994 *	* .7109 *
	* 3.0733 *	* 2.1109 *	* 2.0621 *	* 2.0610 *	* 1.9522 *	* 2.0127 *	* 2.2077 *	* 4.0316 *
9	* 1.3871 *	* 1.3785 *	* 1.3590 *	* 1.4554 *	* 1.4457 *	* 1.4998 *	* 1.5150 *	* .8778 *
	* 2.1109 *	* 2.1122 *	* 2.1407 *	* 1.9813 *	* 2.0279 *	* 1.9401 *	* 1.9184 *	* 3.3010 *
10	* 1.3980 *	* 1.3633 *	* 1.4381 *	* 1.4066 *	* 1.5367 *	* 1.5475 *	* 1.5258 *	* .7640 *
	* 2.0621 *	* 2.1331 *	* 2.0234 *	* 2.1126 *	* 1.9463 *	* 1.9451 *	* 1.9350 *	* 3.8406 *
11	* 1.3969 *	* 1.4576 *	* 1.4056 *	* 1.4879 *	* 1.5085 *	* 1.5974 *	* 1.4901 *	* .6838 *
	* 2.0610 *	* 1.9788 *	* 2.1117 *	* 2.0711 *	* 2.0670 *	* 1.9453 *	* 2.0500 *	* 4.3710 *
12	* 1.4717 *	* 1.4446 *	* 1.5345 *	* 1.5085 *	* 1.6299 *	* 1.6136 *	* .9602 *	
	* 1.9522 *	* 2.0288 *	* 1.9476 *	* 2.0670 *	* 1.9092 *	* 1.9374 *	* 3.2370 *	
13	* 1.4305 *	* 1.4977 *	* 1.5486 *	* 1.5974 *	* 1.6136 *	* 1.5226 *	* .7250 *	
	* 2.0127 *	* 1.9417 *	* 1.9451 *	* 1.9464 *	* 1.9374 *	* 2.0696 *	* 4.3263 *	
14	* 1.2994 *	* 1.5161 *	* 1.5258 *	* 1.4912 *	* .9602 *	* .7250 *		
	* 2.2077 *	* 1.9184 *	* 1.9331 *	* 2.0491 *	* 3.2398 *	* 4.3223 *		
15	* .7109 *	* .8800 *	* .7651 *	* .6849 *	F-SUB-Q			
	* 4.0316 *	* 3.2941 *	* 3.8331 *	* 4.3710 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 143 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 50 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9038 *	* 1.2896 *	* 1.2939 *	* 1.2853 *	* 1.3611 *	* 1.3145 *	* 1.1953 *	* .6546 *
	* 3.0447 *	* 2.1284 *	* 2.1150 *	* 2.1338 *	* 2.0107 *	* 2.0895 *	* 2.2931 *	* 4.1850 *
9	* 1.2896 *	* 1.2798 *	* 1.2506 *	* 1.3460 *	* 1.3297 *	* 1.3861 *	* 1.3882 *	* .8019 *
	* 2.1284 *	* 2.1457 *	* 2.2100 *	* 2.0380 *	* 2.0947 *	* 2.0013 *	* 1.9965 *	* 3.4490 *
10	* 1.2939 *	* 1.2538 *	* 1.3297 *	* 1.2929 *	* 1.4207 *	* 1.4305 *	* 1.3947 *	* .7001 *
	* 2.1150 *	* 2.2009 *	* 2.0756 *	* 2.1791 *	* 1.9889 *	* 1.9889 *	* 2.0122 *	* 3.9978 *
11	* 1.2853 *	* 1.3481 *	* 1.2918 *	* 1.3720 *	* 1.3839 *	* 1.4738 *	* 1.3633 *	* .6242 *
	* 2.1338 *	* 2.0354 *	* 2.1781 *	* 2.1194 *	* 2.1052 *	* 1.9798 *	* 2.1097 *	* 4.5466 *
12	* 1.3611 *	* 1.3286 *	* 1.4196 *	* 1.3850 *	* 1.5053 *	* 1.4814 *	* .8854 *	
	* 2.0107 *	* 2.0956 *	* 1.9935 *	* 2.1052 *	* 1.9633 *	* 2.0046 *	* 3.3430 *	
13	* 1.3145 *	* 1.3839 *	* 1.4305 *	* 1.4738 *	* 1.4814 *	* 1.3904 *	* .6676 *	
	* 2.0895 *	* 2.0050 *	* 1.9881 *	* 1.9778 *	* 2.0046 *	* 2.1500 *	* 4.4701 *	
14	* 1.1953 *	* 1.3882 *	* 1.3947 *	* 1.3644 *	* .8854 *	* .6676 *		
	* 2.2931 *	* 1.9977 *	* 2.0122 *	* 2.1088 *	* 3.3373 *	* 4.4701 *		
15	* .6546 *	* .8041 *	* .7001 *	* .6253 *	* F-SUB-Q			
	* 4.1850 *	* 3.4414 *	* 3.9944 *	* 4.5361 *	* M-SUB-Q			

AT 50% POWER, 50 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7998 *	* 1.1281 *	* 1.1336 *	* 1.1184 *	* 1.1997 *	* 1.1368 *	* 1.0414 *	* .5700 *
	* 3.2690 *	* 2.3270 *	* 2.3194 *	* 2.3609 *	* 2.1957 *	* 2.3277 *	* 2.5416 *	* 4.6611 *
9	* 1.1281 *	* 1.1205 *	* 1.0848 *	* 1.1812 *	* 1.1455 *	* 1.2072 *	* 1.1834 *	* .6871 *
	* 2.3270 *	* 2.3465 *	* 2.4425 *	* 2.2331 *	* 2.3353 *	* 2.2079 *	* 2.2582 *	* 3.8900 *
10	* 1.1336 *	* 1.0880 *	* 1.1671 *	* 1.1184 *	* 1.2376 *	* 1.2398 *	* 1.1758 *	* .5982 *
	* 2.3194 *	* 2.4344 *	* 2.2706 *	* 2.4127 *	* 2.1902 *	* 2.1923 *	* 2.2894 *	* 4.5022 *
11	* 1.1184 *	* 1.1834 *	* 1.1173 *	* 1.2007 *	* 1.1921 *	* 1.2809 *	* 1.1552 *	* .5343 *
	* 2.3609 *	* 2.2309 *	* 2.4115 *	* 2.2894 *	* 2.3247 *	* 2.1604 *	* 2.3805 *	* 5.1063 *
12	* 1.1997 *	* 1.1444 *	* 1.2354 *	* 1.1932 *	* 1.3145 *	* 1.2733 *	* .7694 *	
	* 2.1957 *	* 2.3365 *	* 2.1933 *	* 2.3247 *	* 2.1266 *	* 2.2125 *	* 3.6445 *	
13	* 1.1368 *	* 1.2062 *	* 1.2408 *	* 1.2809 *	* 1.2733 *	* 1.1812 *	* .5776 *	
	* 2.3277 *	* 2.2090 *	* 2.1912 *	* 2.1594 *	* 2.2125 *	* 2.4209 *	* 4.9399 *	
14	* 1.0414 *	* 1.1834 *	* 1.1758 *	* 1.1552 *	* .7694 *	* .5776 *		
	* 2.5416 *	* 2.2582 *	* 2.2894 *	* 2.3793 *	* 3.6417 *	* 4.9473 *		
15	* .5700 *	* .6881 *	* .5993 *	* .5343 *	* F-SUB-Q			
	* 4.6611 *	* 3.8759 *	* 4.5022 *	* 5.1063 *	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 144 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 50 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6372 *	* .8214 *	* .8453 *	* .8843 *	* .9461 *	* .8778 *	* .8041 *	* .4465 *
	* 3.9786 *	* 3.0984 *	* 3.0127 *	* 2.8887 *	* 2.7024 *	* 2.9232 *	* 3.2045 *	* 5.7790 *
9	* .8214 *	* .8355 *	* .8518 *	* .8865 *	* .8843 *	* .9092 *	* .8897 *	* .5169 *
	* 3.0984 *	* 3.0486 *	* 3.0023 *	* 2.8851 *	* 2.8983 *	* 2.8289 *	* 2.9174 *	* 5.0042 *
10	* .8453 *	* .8540 *	* .8800 *	* .8724 *	* .9038 *	* .8941 *	* .8702 *	* .4573 *
	* 3.0127 *	* 2.9965 *	* 2.9119 *	* 2.9787 *	* 2.9001 *	* 2.9370 *	* 3.0054 *	* 5.7060 *
11	* .8843 *	* .8876 *	* .8724 *	* .8951 *	* .9298 *	* .9829 *	* .8637 *	* .4118 *
	* 2.8887 *	* 2.8791 *	* 2.9749 *	* 2.9492 *	* 2.8784 *	* 2.7275 *	* 3.0838 *	* 6.4300 *
12	* .9461 *	* .8854 *	* .9027 *	* .9298 *	* 1.0252 *	* .9786 *	* .6025 *	
	* 2.7024 *	* 2.8965 *	* 2.9037 *	* 2.8784 *	* 2.6120 *	* 2.7602 *	* 4.4720 *	
13	* .8778 *	* .9092 *	* .8951 *	* .9840 *	* .9786 *	* .8832 *	* .4497 *	
	* 2.9232 *	* 2.8306 *	* 2.9396 *	* 2.7237 *	* 2.7602 *	* 3.0943 *	* 6.0886 *	
14	* .8041 *	* .8897 *	* .8702 *	* .8637 *	* .6025 *	* .4497 *		
	* 3.2045 *	* 2.9174 *	* 3.0008 *	* 3.0790 *	* 4.4780 *	* 6.0807 *		
15	* .4465 *	* .5180 *	* .4584 *	* .4118 *	F-SUB-Q			
	* 5.7790 *	* 5.0063 *	* 5.6991 *	* 6.4300 *	M-SUB-Q			

AT 50% POWER, 50 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .4129 *	* .3414 *	* .3739 *	* .4259 *	* .3966 *	* .4172 *	* .3479 *	* .2113 *
	* 6.0153 *	* 7.2373 *	* 6.6162 *	* 5.8130 *	* 6.2537 *	* 5.9696 *	* 7.2130 *	* 11.9364 *
9	* .3414 *	* .3739 *	* .4118 *	* .3901 *	* .4259 *	* .3880 *	* .3620 *	* .2243 *
	* 7.2373 *	* 6.6255 *	* 6.0045 *	* 6.3671 *	* 5.8202 *	* 6.4228 *	* 6.9487 *	* 11.2674 *
10	* .3739 *	* .4129 *	* .3825 *	* .4216 *	* .3858 *	* .3641 *	* .3565 *	* .2222 *
	* 6.6162 *	* 5.9969 *	* 6.5117 *	* 5.9589 *	* 6.5517 *	* 7.0127 *	* 7.1321 *	* 11.4316 *
11	* .4259 *	* .3901 *	* .4216 *	* .3999 *	* .4389 *	* .3999 *	* .3381 *	* .1940 *
	* 5.8130 *	* 6.3671 *	* 5.9408 *	* 6.4280 *	* 5.8492 *	* 6.4581 *	* 7.6197 *	* 13.2179 *
12	* .3966 *	* .4270 *	* .3858 *	* .4389 *	* .4161 *	* .4021 *	* .2893 *	
	* 6.2537 *	* 5.8304 *	* 6.5298 *	* 5.8492 *	* 6.1927 *	* 6.4848 *	* 8.9782 *	
13	* .4172 *	* .3880 *	* .3641 *	* .3999 *	* .4021 *	* .3533 *	* .2157 *	
	* 5.9696 *	* 6.4228 *	* 7.0275 *	* 6.4368 *	* 6.4848 *	* 7.4363 *	* 12.2790 *	
14	* .3479 *	* .3620 *	* .3565 *	* .3392 *	* .2893 *	* .2157 *		
	* 7.2130 *	* 6.9487 *	* 7.1061 *	* 7.6197 *	* 9.0024 *	* 12.2790 *		
15	* .2113 *	* .2254 *	* .2222 *	* .1951 *	F-SUB-Q			
	* 11.9364 *	* 11.2028 *	* 11.4316 *	* 13.2179 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 145 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 200 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .3934 *	* .3912 *	* .4454 *	* .5018 *	* .4812 *	* .4682 *	* .3490 *	* .2048 *
	* 4.6810 *	* 5.3200 *	* 4.7436 *	* 4.1973 *	* 4.5356 *	* 4.3358 *	* 5.2366 *	* 8.1208 *
9	* .3912 *	* .3988 *	* .4552 *	* .4703 *	* .4985 *	* .4541 *	* .3966 *	* .2623 *
	* 5.3200 *	* 4.8444 *	* 4.3310 *	* 4.6276 *	* 4.2356 *	* 4.7078 *	* 4.9936 *	* 7.6751 *
10	* .4454 *	* .4552 *	* .3782 *	* .4552 *	* .4454 *	* .4259 *	* .4021 *	* .2633 *
	* 4.7436 *	* 4.3313 *	* 4.7543 *	* 4.3535 *	* 4.7961 *	* 5.1497 *	* 5.2031 *	* 7.8840 *
11	* .5018 *	* .4703 *	* .4552 *	* .4010 *	* .4172 *	* .3934 *	* .3576 *	* .2308 *
	* 4.1973 *	* 4.6223 *	* 4.3491 *	* 4.9439 *	* 4.6679 *	* 5.2761 *	* 6.0143 *	* 9.5068 *
12	* .4812 *	* .4985 *	* .4454 *	* .4172 *	* .3294 *	* .3089 *	* .2774 *	
	* 4.5356 *	* 4.2356 *	* 4.7961 *	* 4.6679 *	* 4.9293 *	* 5.1628 *	* 7.0648 *	
13	* .4682 *	* .4541 *	* .4259 *	* .3934 *	* .3089 *	* .2590 *	* .1907 *	
	* 4.3358 *	* 4.7078 *	* 5.1497 *	* 5.2761 *	* 5.1628 *	* 5.7823 *	* 9.1498 *	
14	* .3490 *	* .3966 *	* .4021 *	* .3576 *	* .2774 *	* .1907 *		
	* 5.2366 *	* 4.9936 *	* 5.2031 *	* 6.0143 *	* 7.0648 *	* 9.1498 *		
15	* .2048 *	* .2623 *	* .2633 *	* .2308 *	F-SUB-Q			
	* 8.1208 *	* 7.6617 *	* 7.8840 *	* 9.5068 *	M-SUB-Q			

AT 50% POWER, 200 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .5527 *	* .9222 *	* 1.0284 *	* 1.0003 *	* 1.0935 *	* .9721 *	* .7586 *	* .4237 *
	* 3.3653 *	* 2.4169 *	* 2.1782 *	* 2.2263 *	* 2.1047 *	* 2.2512 *	* 2.4762 *	* 4.2265 *
9	* .9222 *	* .9276 *	* .9396 *	* 1.0804 *	* .9981 *	* 1.0458 *	* .9211 *	* .5819 *
	* 2.4169 *	* 2.2794 *	* 2.2889 *	* 2.1006 *	* 2.2322 *	* 2.1525 *	* 2.2805 *	* 3.6111 *
10	* 1.0284 *	* .9407 *	* .8128 *	* .9385 *	* 1.0458 *	* 1.0187 *	* .9255 *	* .5288 *
	* 2.1782 *	* 2.2864 *	* 2.1577 *	* 2.2951 *	* 2.1969 *	* 2.2677 *	* 2.3752 *	* 4.1859 *
11	* 1.0003 *	* 1.0804 *	* .9385 *	* .9222 *	* .8605 *	* .9125 *	* .8442 *	* .4660 *
	* 2.2263 *	* 2.0997 *	* 2.2913 *	* 2.3035 *	* 2.4256 *	* 2.3824 *	* 2.6664 *	* 4.9368 *
12	* 1.0935 *	* .9981 *	* 1.0447 *	* .8605 *	* .7152 *	* .7261 *	* .5494 *	
	* 2.1047 *	* 2.2310 *	* 2.1969 *	* 2.4256 *	* 2.2264 *	* 2.3674 *	* 3.7203 *	
13	* .9721 *	* 1.0447 *	* 1.0187 *	* .9125 *	* .7261 *	* .6101 *	* .3825 *	
	* 2.2512 *	* 2.1536 *	* 2.2665 *	* 2.3818 *	* 2.3661 *	* 2.5831 *	* 4.7615 *	
14	* .7586 *	* .9211 *	* .9255 *	* .8442 *	* .5494 *	* .3825 *		
	* 2.4762 *	* 2.2805 *	* 2.3738 *	* 2.6655 *	* 3.7203 *	* 4.7615 *		
15	* .4237 *	* .5819 *	* .5288 *	* .4671 *	F-SUB-Q			
	* 4.2265 *	* 3.6081 *	* 4.1859 *	* 4.9368 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 146 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 200 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6773 *	* 1.1531 *	* 1.3069 *	* 1.3134 *	* 1.3828 *	* 1.2766 *	* 1.0187 *	* .5722 *
	* 2.9648 *	* 2.0392 *	* 1.8114 *	* 1.7806 *	* 1.7457 *	* 1.8078 *	* 2.0556 *	* 3.5531 *
9	* 1.1531 *	* 1.1801 *	* 1.2376 *	* 1.3763 *	* 1.3037 *	* 1.3297 *	* 1.2235 *	* .7586 *
	* 2.0392 *	* 1.9057 *	* 1.8339 *	* 1.7381 *	* 1.7926 *	* 1.7847 *	* 1.8293 *	* 2.9818 *
10	* 1.3069 *	* 1.2387 *	* 1.0924 *	* 1.2343 *	* 1.3156 *	* 1.2777 *	* 1.2202 *	* .6730 *
	* 1.8114 *	* 1.8323 *	* 1.7863 *	* 1.8419 *	* 1.8216 *	* 1.8848 *	* 1.8955 *	* 3.4920 *
11	* 1.3134 *	* 1.3774 *	* 1.2354 *	* 1.1899 *	* 1.1260 *	* 1.1444 *	* 1.1032 *	* .5884 *
	* 1.7806 *	* 1.7370 *	* 1.8402 *	* 1.9040 *	* 1.9402 *	* 1.9581 *	* 2.1198 *	* 4.0809 *
12	* 1.3828 *	* 1.3048 *	* 1.3145 *	* 1.1260 *	* .9168 *	* .9439 *	* .6816 *	
	* 1.7457 *	* 1.7911 *	* 1.8216 *	* 1.9402 *	* 1.8353 *	* 1.8896 *	* 3.1073 *	
13	* 1.2766 *	* 1.3286 *	* 1.2777 *	* 1.1455 *	* .9439 *	* .8041 *	* .4757 *	
	* 1.8078 *	* 1.7854 *	* 1.8848 *	* 1.9577 *	* 1.8896 *	* 2.0407 *	* 3.9638 *	
14	* 1.0187 *	* 1.2235 *	* 1.2202 *	* 1.1032 *	* .6816 *	* .4757 *		
	* 2.0556 *	* 1.8293 *	* 1.8947 *	* 2.1188 *	* 3.1063 *	* 3.9638 *		
15	* .5722 *	* .7597 *	* .6730 *	* .5884 *	* F-SUB-Q			
	* 3.5531 *	* 2.9778 *	* 3.4891 *	* 4.0771 *	* M-SUB-Q			

AT 50% POWER, 200 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7564 *	* 1.3091 *	* 1.5215 *	* 1.5865 *	* 1.6093 *	* 1.5389 *	* 1.2571 *	* .7142 *
	* 2.8672 *	* 1.9096 *	* 1.6551 *	* 1.5512 *	* 1.5818 *	* 1.5828 *	* 1.8734 *	* 3.2885 *
9	* 1.3091 *	* 1.3991 *	* 1.4933 *	* 1.6071 *	* 1.5670 *	* 1.5464 *	* 1.4793 *	* .9006 *
	* 1.9096 *	* 1.7547 *	* 1.6059 *	* 1.5756 *	* 1.5689 *	* 1.6242 *	* 1.6194 *	* 2.7163 *
10	* 1.5215 *	* 1.4955 *	* 1.4565 *	* 1.4933 *	* 1.5215 *	* 1.4532 *	* 1.4652 *	* .7835 *
	* 1.6551 *	* 1.6041 *	* 1.6235 *	* 1.6077 *	* 1.6600 *	* 1.7416 *	* 1.6602 *	* 3.1754 *
11	* 1.5865 *	* 1.6082 *	* 1.4944 *	* 1.4261 *	* 1.3492 *	* 1.3048 *	* 1.3015 *	* .6784 *
	* 1.5512 *	* 1.5745 *	* 1.6059 *	* 1.7266 *	* 1.7006 *	* 1.7757 *	* 1.8827 *	* 3.7126 *
12	* 1.6093 *	* 1.5681 *	* 1.5215 *	* 1.3492 *	* 1.0750 *	* 1.1119 *	* .7759 *	
	* 1.5818 *	* 1.5683 *	* 1.6607 *	* 1.7003 *	* 1.6579 *	* 1.6679 *	* 2.8469 *	
13	* 1.5389 *	* 1.5464 *	* 1.4532 *	* 1.3048 *	* 1.1130 *	* .9591 *	* .5429 *	
	* 1.5828 *	* 1.6248 *	* 1.7416 *	* 1.7750 *	* 1.6679 *	* 1.7847 *	* 3.6169 *	
14	* 1.2571 *	* 1.4793 *	* 1.4652 *	* 1.3015 *	* .7759 *	* .5440 *		
	* 1.8734 *	* 1.6194 *	* 1.6602 *	* 1.8823 *	* 2.8469 *	* 3.6155 *		
15	* .7142 *	* .9016 *	* .7835 *	* .6784 *	* F-SUB-Q			
	* 3.2885 *	* 2.7112 *	* 3.1755 *	* 3.7119 *	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 147 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 200 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7911	* 1.3828	* 1.6353	* 1.7426	* 1.7328	* 1.6938	* 1.4196	* .7944
	* 2.9730	* 1.9350	* 1.6465	* 1.4998	* 1.5599	* 1.5324	* 1.8594	* 3.2936
9	* 1.3828	* 1.5193	* 1.6613	* 1.7328	* 1.7187	* 1.6646	* 1.6223	* .9775
	* 1.9350	* 1.7554	* 1.5576	* 1.5591	* 1.5169	* 1.6120	* 1.5847	* 2.7014
10	* 1.6353	* 1.6635	* 1.6548	* 1.6624	* 1.6288	* 1.5334	* 1.5941	* .8410
	* 1.6465	* 1.5553	* 1.6045	* 1.5553	* 1.6480	* 1.7441	* 1.6109	* 3.1502
11	* 1.7426	* 1.7339	* 1.6635	* 1.5594	* 1.4782	* 1.3785	* 1.4023	* .7228
	* 1.4998	* 1.5574	* 1.5536	* 1.7070	* 1.6458	* 1.7597	* 1.8205	* 3.6475
12	* 1.7328	* 1.7187	* 1.6288	* 1.4771	* 1.1585	* 1.1964	* .8193	*
	* 1.5599	* 1.5164	* 1.6487	* 1.6458	* 1.6379	* 1.6240	* 2.8388	*
13	* 1.6938	* 1.6635	* 1.5334	* 1.3785	* 1.1964	* 1.0382	* .5744	*
	* 1.5324	* 1.6126	* 1.7441	* 1.7591	* 1.6240	* 1.7319	* 3.5979	*
14	* 1.4196	* 1.6223	* 1.5952	* 1.4023	* .8193	* .5744	*	*
	* 1.8594	* 1.5847	* 1.6109	* 1.8197	* 2.8379	* 3.5963	*	*
15	* .7944	* .9786	* .8410	* .7228	* F-SUB-Q			
	* 3.2936	* 2.6965	* 3.1479	* 3.6475	* M-SUB-Q			

AT 50% POWER, 200 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8084	* 1.4186	* 1.6971	* 1.8304	* 1.8022	* 1.7794	* 1.4858	* .8301
	* 3.1294	* 2.0240	* 1.6972	* 1.5166	* 1.5935	* 1.5497	* 1.9093	* 3.3997
9	* 1.4186	* 1.5779	* 1.7513	* 1.8011	* 1.8011	* 1.7242	* 1.6960	* 1.0154
	* 2.0240	* 1.8197	* 1.5824	* 1.5974	* 1.5339	* 1.6566	* 1.6149	* 2.7767
10	* 1.6971	* 1.7534	* 1.7383	* 1.7523	* 1.6862	* 1.5724	* 1.6613	* .8713
	* 1.6972	* 1.5799	* 1.6485	* 1.5758	* 1.6915	* 1.7891	* 1.6255	* 3.2188
11	* 1.8304	* 1.8022	* 1.7545	* 1.6277	* 1.5464	* 1.4142	* 1.4511	* .7445
	* 1.5166	* 1.5963	* 1.5747	* 1.7504	* 1.6783	* 1.8186	* 1.8328	* 3.6980
12	* 1.8022	* 1.8022	* 1.6852	* 1.5464	* 1.2040	* 1.2376	* .8410	*
	* 1.5935	* 1.5333	* 1.6921	* 1.6783	* 1.6897	* 1.6631	* 2.9433	*
13	* 1.7794	* 1.7242	* 1.5724	* 1.4142	* 1.2376	* 1.0783	* .5906	*
	* 1.5497	* 1.6572	* 1.7891	* 1.8180	* 1.6627	* 1.7727	* 3.7321	*
14	* 1.4858	* 1.6960	* 1.6613	* 1.4511	* .8410	* .5906	*	*
	* 1.9093	* 1.6149	* 1.6245	* 1.8320	* 2.9427	* 3.7290	*	*
15	* .8301	* 1.0176	* .8713	* .7445	* F-SUB-Q			
	* 3.3997	* 2.7713	* 3.2149	* 3.6929	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 148 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 200 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8214	* 1.4467	* 1.7448	* 1.8965	* 1.8564	* 1.8455	* 1.5302	* .8540
	* 3.2797	* 2.1158	* 1.7517	* 1.5364	* 1.6274	* 1.5675	* 1.9611	* 3.5004
9	* 1.4467	* 1.6201	* 1.8163	* 1.8542	* 1.8640	* 1.7697	* 1.7469	* 1.0436
	* 2.1158	* 1.8945	* 1.6188	* 1.6354	* 1.5550	* 1.6941	* 1.6436	* 2.8386
10	* 1.7448	* 1.8195	* 1.7968	* 1.8184	* 1.7296	* 1.6039	* 1.7122	* .8951
	* 1.7517	* 1.6160	* 1.7032	* 1.6050	* 1.7345	* 1.8511	* 1.6542	* 3.2888
11	* 1.8965	* 1.8564	* 1.8206	* 1.6776	* 1.5995	* 1.4446	* 1.4901	* .7629
	* 1.5364	* 1.6343	* 1.6029	* 1.7966	* 1.7341	* 1.8979	* 1.8849	* 3.8070
12	* 1.8564	* 1.8650	* 1.7296	* 1.5995	* 1.2398	* 1.2733	* .8605	*
	* 1.6274	* 1.5544	* 1.7352	* 1.7336	* 1.7603	* 1.7225	* 3.0749	*
13	* 1.8455	* 1.7686	* 1.6039	* 1.4446	* 1.2733	* 1.1130	* .6058	*
	* 1.5675	* 1.6947	* 1.8499	* 1.8974	* 1.7225	* 1.8375	* 3.8965	*
14	* 1.5302	* 1.7469	* 1.7133	* 1.4901	* .8605	* .6058	*	*
	* 1.9611	* 1.6436	* 1.6536	* 1.8835	* 3.0734	* 3.8955	*	*
15	* .8540	* 1.0447	* .8951	* .7629	* F-SUB-Q			
	* 3.5004	* 2.8351	* 3.2864	* 3.8092	* M-SUB-Q			

AT 50% POWER, 200 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8204	* 1.4424	* 1.7491	* 1.9225	* 1.8650	* 1.8683	* 1.5324	* .8529
	* 3.5680	* 2.2721	* 1.8671	* 1.6271	* 1.7329	* 1.6576	* 2.0776	* 3.7162
9	* 1.4424	* 1.6223	* 1.8401	* 1.8618	* 1.8867	* 1.7718	* 1.7610	* 1.0436
	* 2.2721	* 2.0197	* 1.7113	* 1.7419	* 1.6487	* 1.8077	* 1.7427	* 3.0196
10	* 1.7491	* 1.8423	* 1.8054	* 1.8423	* 1.7328	* 1.5974	* 1.7285	* .8962
	* 1.8671	* 1.7082	* 1.8041	* 1.6981	* 1.8560	* 1.9900	* 1.7587	* 3.5058
11	* 1.9225	* 1.8629	* 1.8445	* 1.6852	* 1.6190	* 1.4457	* 1.5009	* .7629
	* 1.6271	* 1.7411	* 1.6957	* 1.9151	* 1.8444	* 2.0345	* 2.0178	* 4.0877
12	* 1.8650	* 1.8878	* 1.7318	* 1.6190	* 1.2549	* 1.2874	* .8615	*
	* 1.7329	* 1.6485	* 1.8567	* 1.8444	* 1.8890	* 1.8454	* 3.3009	*
13	* 1.8683	* 1.7708	* 1.5974	* 1.4467	* 1.2885	* 1.1325	* .6090	*
	* 1.6576	* 1.8084	* 1.9900	* 2.0336	* 1.8454	* 1.9786	* 4.2115	*
14	* 1.5324	* 1.7610	* 1.7285	* 1.5009	* .8626	* .6090	*	*
	* 2.0776	* 1.7427	* 1.7580	* 2.0169	* 3.2992	* 4.2087	*	*
15	* .8529	* 1.0458	* .8973	* .7629	* F-SUB-Q			
	* 3.7162	* 3.0123	* 3.5013	* 4.0840	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 149 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 200 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8290	* 1.4402	* 1.7502	* 1.9366	* 1.8694	* 1.8813	* 1.5324	* .8518
	* 3.9137	* 2.4823	* 2.0343	* 1.7759	* 1.8854	* 1.8071	* 2.2530	* 4.0205
9	* 1.4402	* 1.6223	* 1.8520	* 1.8650	* 1.8986	* 1.7708	* 1.7653	* 1.0436
	* 2.4823	* 2.2009	* 1.8673	* 1.8961	* 1.8007	* 1.9686	* 1.9052	* 3.2731
10	* 1.7502	* 1.8553	* 1.8109	* 1.8564	* 1.7339	* 1.5930	* 1.7361	* .8973
	* 2.0343	* 1.8641	* 1.9616	* 1.8540	* 2.0274	* 2.1792	* 1.9234	* 3.8062
11	* 1.9366	* 1.8672	* 1.8585	* 1.6895	* 1.6321	* 1.4500	* 1.5074	* .7640
	* 1.7759	* 1.8945	* 1.8517	* 2.0897	* 2.0140	* 2.2127	* 2.1942	* 4.3983
12	* 1.8694	* 1.8997	* 1.7328	* 1.6321	* 1.2788	* 1.3026	* .8670	*
	* 1.8854	* 1.8005	* 2.0282	* 2.0140	* 2.0602	* 2.0176	* 3.5834	*
13	* 1.8813	* 1.7708	* 1.5930	* 1.4500	* 1.3037	* 1.1531	* .6145	*
	* 1.8071	* 1.9694	* 2.1799	* 2.2117	* 2.0167	* 2.1533	* 4.5556	*
14	* 1.5324	* 1.7664	* 1.7361	* 1.5074	* .8670	* .6155	*	*
	* 2.2530	* 1.9038	* 1.9234	* 2.1931	* 3.5834	* 4.5524	*	*
15	* .8518	* 1.0458	* .8984	* .7640	* F-SUB-Q			
	* 4.0205	* 3.2684	* 3.8062	* 4.3941	* M-SUB-Q			

AT 50% POWER, 200 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8182	* 1.4110	* 1.7155	* 1.8986	* 1.8347	* 1.8423	* 1.5031	* .8355
	* 4.4096	* 2.8172	* 2.2932	* 2.0043	* 2.1035	* 2.0313	* 2.5085	* 4.4605
9	* 1.4110	* 1.5898	* 1.8152	* 1.8293	* 1.8607	* 1.7350	* 1.7274	* 1.0230
	* 2.8172	* 2.4934	* 2.1253	* 2.1243	* 2.0292	* 2.1935	* 2.1385	* 3.6198
10	* 1.7155	* 1.8184	* 1.7773	* 1.8206	* 1.6992	* 1.5594	* 1.6992	* .8800
	* 2.2932	* 2.1223	* 2.2145	* 2.1034	* 2.2678	* 2.4280	* 2.1492	* 4.1902
11	* 1.8986	* 1.8315	* 1.8228	* 1.6602	* 1.6028	* 1.4261	* 1.4771	* .7499
	* 2.0043	* 2.1241	* 2.1015	* 2.3518	* 2.2976	* 2.4998	* 2.4734	* 4.8847
12	* 1.8347	* 1.8618	* 1.6992	* 1.6028	* 1.2723	* 1.2874	* .8550	*
	* 2.1035	* 2.0266	* 2.2689	* 2.2976	* 2.3326	* 2.3008	* 4.0363	*
13	* 1.8423	* 1.7339	* 1.5594	* 1.4261	* 1.2874	* 1.1455	* .6090	*
	* 2.0313	* 2.1945	* 2.4280	* 2.4989	* 2.3005	* 2.4501	* 5.1229	*
14	* 1.5031	* 1.7285	* 1.6992	* 1.4771	* .8550	* .6090	*	*
	* 2.5085	* 2.1367	* 2.1500	* 2.4721	* 4.0353	* 5.1229	*	*
15	* .8355	* 1.0252	* .8810	* .7510	* F-SUB-Q			
	* 4.4605	* 3.6142	* 4.1902	* 4.8755	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 150 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 200 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8149	* 1.4023	* 1.7101	* 1.9138	* 1.8315	* 1.8553	* 1.4977	* .8312
	* 4.6760	* 3.0895	* 2.5409	* 2.2216	* 2.3322	* 2.2441	* 2.7619	* 4.9084
9	* 1.4023	* 1.5833	* 1.8271	* 1.8260	* 1.8737	* 1.7296	* 1.7350	* 1.0198
	* 3.0895	* 2.7619	* 2.3484	* 2.3565	* 2.2481	* 2.4297	* 2.3581	* 3.9846
10	* 1.7101	* 1.8304	* 1.7751	* 1.8347	* 1.6949	* 1.5508	* 1.7112	* .8800
	* 2.5409	* 2.3449	* 2.4473	* 2.3302	* 2.5271	* 2.7077	* 2.3815	* 4.6205
11	* 1.9138	* 1.8271	* 1.8369	* 1.6591	* 1.6158	* 1.4283	* 1.4879	* .7499
	* 2.2216	* 2.3541	* 2.3287	* 2.5559	* 2.4743	* 2.7247	* 2.7501	* 5.4001
12	* 1.8315	* 1.8748	* 1.6938	* 1.6158	* 1.2809	* 1.3037	* .8594	*
	* 2.3322	* 2.2478	* 2.5285	* 2.4743	* 2.5364	* 2.5176	* 4.4485	*
13	* 1.8553	* 1.7285	* 1.5508	* 1.4283	* 1.3037	* 1.1671	* .6155	*
	* 2.2441	* 2.4309	* 2.7077	* 2.7231	* 2.5176	* 2.7181	* 5.7132	*
14	* 1.4977	* 1.7361	* 1.7112	* 1.4890	* .8594	* .6155	*	*
	* 2.7619	* 2.3581	* 2.3793	* 2.7501	* 4.4442	* 5.7132	*	*
15	* .8312	* 1.0219	* .8800	* .7499	* F-SUB-Q			
	* 4.9084	* 3.9778	* 4.6205	* 5.4050	* M-SUB-Q			

AT 50% POWER, 200 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8030	* 1.3839	* 1.6895	* 1.8986	* 1.8130	* 1.8401	* 1.4814	* .8204
	* 4.9856	* 3.2221	* 2.6180	* 2.3157	* 2.4295	* 2.3855	* 2.9730	* 5.3677
9	* 1.3839	* 1.5649	* 1.8130	* 1.8054	* 1.8596	* 1.7101	* 1.7209	* 1.0078
	* 3.2221	* 2.8398	* 2.4352	* 2.4460	* 2.3661	* 2.5805	* 2.5634	* 4.3927
10	* 1.6895	* 1.8163	* 1.7578	* 1.8228	* 1.6765	* 1.5324	* 1.7003	* .8713
	* 2.6180	* 2.4314	* 2.5291	* 2.4352	* 2.6610	* 2.9121	* 2.6195	* 5.1049
11	* 1.8986	* 1.8076	* 1.8250	* 1.6440	* 1.6082	* 1.4196	* 1.4814	* .7445
	* 2.3157	* 2.4434	* 2.4327	* 2.7165	* 2.6387	* 2.8941	* 3.0072	* 6.0534
12	* 1.8130	* 1.8607	* 1.6754	* 1.6071	* 1.2766	* 1.3048	* .8572	*
	* 2.4295	* 2.3649	* 2.6625	* 2.6387	* 2.6962	* 2.6919	* 4.7245	*
13	* 1.8401	* 1.7090	* 1.5324	* 1.4196	* 1.3048	* 1.1747	* .6177	*
	* 2.3855	* 2.5820	* 2.9121	* 2.8924	* 2.6919	* 2.9098	* 6.0848	*
14	* 1.4814	* 1.7209	* 1.7003	* 1.4814	* .8583	* .6177	*	*
	* 2.9730	* 2.5634	* 2.6180	* 3.0052	* 4.7245	* 6.0848	*	*
15	* .8204	* 1.0100	* .8724	* .7445	* F-SUB-Q			
	* 5.3677	* 4.3845	* 5.1049	* 6.0534	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 151 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 200 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7900	* 1.3590	* 1.6591	* 1.8640	* 1.7816	* 1.8044	* 1.4543	* .8063
	* 5.2348	* 3.3377	* 2.7156	* 2.4134	* 2.5193	* 2.4874	* 3.0819	* 5.5628
9	* 1.3590	* 1.5378	* 1.7805	* 1.7740	* 1.8250	* 1.6787	* 1.6895	* .9905
	* 3.3377	* 2.9450	* 2.5384	* 2.5370	* 2.4665	* 2.6785	* 2.6724	* 4.5602
10	* 1.6591	* 1.7838	* 1.7296	* 1.7924	* 1.6505	* 1.5074	* 1.6732	* .8583
	* 2.7156	* 2.5329	* 2.6203	* 2.5384	* 2.7634	* 3.0264	* 2.7313	* 5.2997
11	* 1.8640	* 1.7762	* 1.7946	* 1.6234	* 1.5887	* 1.4077	* 1.4630	* .7347
	* 2.4134	* 2.5343	* 2.5343	* 2.8419	* 2.8113	* 3.0739	* 3.1841	* 6.2832
12	* 1.7816	* 1.8260	* 1.6494	* 1.5876	* 1.2701	* 1.3015	* .8550	*
	* 2.5193	* 2.4652	* 2.7650	* 2.8130	* 2.8748	* 2.8801	* 4.9959	*
13	* 1.8044	* 1.6776	* 1.5074	* 1.4077	* 1.3026	* 1.1812	* .6199	*
	* 2.4874	* 2.6800	* 3.0264	* 3.0719	* 2.8801	* 3.1187	* 6.4556	*
14	* 1.4543	* 1.6906	* 1.6732	* 1.4641	* .8550	* .6199	*	*
	* 3.0819	* 2.6709	* 2.7298	* 3.1820	* 4.9959	* 6.4556	*	*
15	* .8063	* .9927	* .8583	* .7347	* F-SUB-Q			
	* 5.5628	* 4.5514	* 5.2937	* 6.2832	* M-SUB-Q			

AT 50% POWER, 200 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7987	* 1.3687	* 1.6678	* 1.8813	* 1.7914	* 1.8217	* 1.4608	* .8084
	* 4.9560	* 3.2681	* 2.6664	* 2.3649	* 2.4808	* 2.4409	* 3.0342	* 5.4595
9	* 1.3687	* 1.5475	* 1.7989	* 1.7838	* 1.8434	* 1.6862	* 1.7068	* .9959
	* 3.2681	* 2.8872	* 2.4861	* 2.4979	* 2.4221	* 2.6409	* 2.6247	* 4.4735
10	* 1.6678	* 1.8011	* 1.7437	* 1.8163	* 1.6646	* 1.5193	* 1.6971	* .8659
	* 2.6664	* 2.4821	* 2.5787	* 2.4900	* 2.7266	* 2.9899	* 2.6831	* 5.1944
11	* 1.8813	* 1.7849	* 1.8195	* 1.6451	* 1.6212	* 1.4392	* 1.4933	* .7445
	* 2.3649	* 2.4953	* 2.4874	* 2.7282	* 2.6584	* 2.8999	* 2.9995	* 6.1089
12	* 1.7914	* 1.8445	* 1.6635	* 1.6201	* 1.3113	* 1.3557	* .8810	*
	* 2.4808	* 2.4196	* 2.7282	* 2.6572	* 2.7240	* 2.7059	* 4.6795	*
13	* 1.8217	* 1.6862	* 1.5193	* 1.4402	* 1.3557	* 1.2430	* .6459	*
	* 2.4409	* 2.6424	* 2.9899	* 2.9013	* 2.7059	* 2.9107	* 5.9943	*
14	* 1.4608	* 1.7068	* 1.6971	* 1.4933	* .8810	* .6459	*	*
	* 3.0342	* 2.6232	* 2.6815	* 2.9976	* 4.6795	* 5.9943	*	*
15	* .8084	* .9981	* .8670	* .7445	* F-SUB-Q			
	* 5.4595	* 4.4650	* 5.1887	* 6.0946	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 152 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 200 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8279	* 1.3730	* 1.6602	* 1.8791	* 1.7816	* 1.8184	* 1.4522	* .8019
	* 4.6000	* 3.0228	* 2.4721	* 2.1883	* 2.3038	* 2.2576	* 2.8098	* 5.0512
9	* 1.3730	* 1.5454	* 1.7989	* 1.7751	* 1.8423	* 1.6776	* 1.7068	* .9916
	* 3.0228	* 2.6728	* 2.2940	* 2.3165	* 2.2373	* 2.4490	* 2.4177	* 4.1268
10	* 1.6602	* 1.8022	* 1.7415	* 1.8250	* 1.6656	* 1.5183	* 1.7057	* .8659
	* 2.4721	* 2.2906	* 2.3834	* 2.2941	* 2.5173	* 2.7576	* 2.4571	* 4.7752
11	* 1.8791	* 1.7773	* 1.8271	* 1.6581	* 1.6505	* 1.4738	* 1.5139	* .7467
	* 2.1883	* 2.3142	* 2.2897	* 2.5206	* 2.4442	* 2.6769	* 2.7598	* 5.6320
12	* 1.7816	* 1.8434	* 1.6646	* 1.6494	* 1.4045	* 1.4359	* .9071	*
	* 2.3038	* 2.2362	* 2.5186	* 2.4432	* 2.5139	* 2.4908	* 4.3235	*
13	* 1.8184	* 1.6765	* 1.5183	* 1.4738	* 1.4370	* 1.3340	* .6762	*
	* 2.2576	* 2.4503	* 2.7591	* 2.6742	* 2.4894	* 2.6818	* 5.5594	*
14	* 1.4522	* 1.7068	* 1.7057	* 1.5150	* .9081	* .6762	*	*
	* 2.8098	* 2.4177	* 2.4571	* 2.7582	* 4.3267	* 5.5476	*	*
15	* .8019	* .9938	* .8659	* .7478	* F-SUB-Q			
	* 5.0512	* 4.1126	* 4.7659	* 5.6190	* M-SUB-Q			

AT 50% POWER, 200 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8745	* 1.3817	* 1.6494	* 1.8640	* 1.7664	* 1.8022	* 1.4381	* .7933
	* 4.2892	* 2.7817	* 2.2747	* 2.0110	* 2.1174	* 2.0756	* 2.5892	* 4.6648
9	* 1.3817	* 1.5410	* 1.7881	* 1.7610	* 1.8304	* 1.6635	* 1.6971	* .9840
	* 2.7817	* 2.4573	* 2.1090	* 2.1318	* 2.0575	* 2.2540	* 2.2213	* 3.8010
10	* 1.6494	* 1.7914	* 1.7339	* 1.8217	* 1.6646	* 1.5172	* 1.7047	* .8615
	* 2.2747	* 2.1044	* 2.1904	* 2.1036	* 2.3107	* 2.5313	* 2.2513	* 4.3918
11	* 1.8640	* 1.7632	* 1.8239	* 1.6711	* 1.6787	* 1.5128	* 1.5291	* .7478
	* 2.0110	* 2.1280	* 2.1008	* 2.3464	* 2.2763	* 2.4948	* 2.5705	* 5.1663
12	* 1.7664	* 1.8315	* 1.6635	* 1.6776	* 1.5389	* 1.5703	* .9374	*
	* 2.1174	* 2.0548	* 2.3118	* 2.2783	* 2.3420	* 2.3185	* 4.0411	*
13	* 1.8022	* 1.6624	* 1.5172	* 1.5139	* 1.5703	* 1.4500	* .7098	*
	* 2.0756	* 2.2551	* 2.5313	* 2.4935	* 2.3185	* 2.4989	* 5.1906	*
14	* 1.4381	* 1.6971	* 1.7057	* 1.5302	* .9374	* .7098	*	*
	* 2.5892	* 2.2203	* 2.2523	* 2.5680	* 4.0411	* 5.1844	*	*
15	* .7933	* .9862	* .8626	* .7488	* F-SUB-Q			
	* 4.6648	* 3.7949	* 4.3918	* 5.1663	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 153 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 200 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9006	* 1.3795	* 1.6277	* 1.8271	* 1.7415	* 1.7675	* 1.4175	* .7813
	* 4.0054	* 2.5877	* 2.1236	* 1.8877	* 1.9761	* 1.9508	* 2.4191	* 4.3652
9	* 1.3795	* 1.5280	* 1.7578	* 1.7372	* 1.7968	* 1.6407	* 1.6700	* .9710
	* 2.5877	* 2.2904	* 1.9762	* 1.9886	* 1.9293	* 2.1028	* 2.0779	* 3.5572
10	* 1.6277	* 1.7610	* 1.7155	* 1.7968	* 1.6526	* 1.5096	* 1.6852	* .8529
	* 2.1236	* 1.9729	* 2.0403	* 1.9681	* 2.1480	* 2.3521	* 2.1021	* 4.0971
11	* 1.8271	* 1.7393	* 1.7989	* 1.6711	* 1.7003	* 1.5519	* 1.5269	* .7445
	* 1.8877	* 1.9869	* 1.9657	* 2.1830	* 2.1426	* 2.3404	* 2.3994	* 4.8101
12	* 1.7415	* 1.7979	* 1.6526	* 1.6992	* 1.6483	* 1.6559	* .9569	*
	* 1.9761	* 1.9278	* 2.1508	* 2.1436	* 2.2015	* 2.1868	* 3.7949	*
13	* 1.7675	* 1.6396	* 1.5096	* 1.5519	* 1.6559	* 1.5258	* .7337	*
	* 1.9508	* 2.1055	* 2.3510	* 2.3393	* 2.1876	* 2.3551	* 4.8911	*
14	* 1.4175	* 1.6700	* 1.6862	* 1.5280	* .9569	* .7337	*	*
	* 2.4191	* 2.0788	* 2.1021	* 2.4004	* 3.7973	* 4.8950	*	*
15	* .7813	* .9732	* .8529	* .7456	* F-SUB-Q			
	* 4.3652	* 3.5491	* 4.1004	* 4.8006	* M-SUB-Q			

AT 50% POWER, 200 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9071	* 1.3795	* 1.6201	* 1.8271	* 1.7339	* 1.7686	* 1.4099	* .7748
	* 3.6854	* 2.3967	* 1.9795	* 1.7528	* 1.8429	* 1.8104	* 2.2612	* 4.1012
9	* 1.3795	* 1.5248	* 1.7599	* 1.7296	* 1.7989	* 1.6353	* 1.6754	* .9667
	* 2.3967	* 2.1292	* 1.8323	* 1.8545	* 1.7893	* 1.9613	* 1.9262	* 3.3260
10	* 1.6201	* 1.7643	* 1.7122	* 1.8044	* 1.6537	* 1.5118	* 1.7003	* .8529
	* 1.9795	* 1.8281	* 1.8970	* 1.8204	* 1.9930	* 2.1804	* 1.9359	* 3.8142
11	* 1.8271	* 1.7307	* 1.8076	* 1.6787	* 1.7415	* 1.5920	* 1.5508	* .7467
	* 1.7528	* 1.8517	* 1.8176	* 2.0118	* 1.9801	* 2.1699	* 2.1933	* 4.4575
12	* 1.7339	* 1.8000	* 1.6526	* 1.7404	* 1.7014	* 1.7155	* .9764	*
	* 1.8429	* 1.7879	* 1.9939	* 1.9809	* 2.0326	* 2.0140	* 3.5304	*
13	* 1.7686	* 1.6342	* 1.5118	* 1.5920	* 1.7166	* 1.5920	* .7553	*
	* 1.8104	* 1.9621	* 2.1804	* 2.1689	* 2.0132	* 2.1690	* 4.5455	*
14	* 1.4099	* 1.6765	* 1.7003	* 1.5519	* .9775	* .7553	*	*
	* 2.2612	* 1.9255	* 1.9351	* 2.1923	* 3.5305	* 4.5489	*	*
15	* .7748	* .9688	* .8529	* .7478	* F-SUB-Q			
	* 4.1012	* 3.3190	* 3.8112	* 4.4575	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 154 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 200 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8919	* 1.3546	* 1.5833	* 1.7805	* 1.6938	* 1.7231	* 1.3795	* .7564
	* 3.4881	* 2.2627	* 1.8958	* 1.6864	* 1.7689	* 1.7435	* 2.1730	* 3.9542
9	* 1.3546	* 1.4923	* 1.7166	* 1.6895	* 1.7534	* 1.6006	* 1.6418	* .9450
	* 2.2627	* 2.0299	* 1.7585	* 1.7790	* 1.7208	* 1.8799	* 1.8447	* 3.1987
10	* 1.5833	* 1.7198	* 1.6754	* 1.7621	* 1.6223	* 1.4879	* 1.6700	* .8355
	* 1.8958	* 1.7553	* 1.8131	* 1.7431	* 1.8990	* 2.0735	* 1.8464	* 3.6556
11	* 1.7805	* 1.6917	* 1.7643	* 1.6494	* 1.7209	* 1.5833	* 1.5302	* .7337
	* 1.6864	* 1.7769	* 1.7399	* 1.9076	* 1.8664	* 2.0341	* 2.0792	* 4.2495
12	* 1.6938	* 1.7545	* 1.6212	* 1.7198	* 1.6949	* 1.7090	* .9699	*
	* 1.7689	* 1.7195	* 1.8997	* 1.8671	* 1.9063	* 1.8957	* 3.3226	*
13	* 1.7231	* 1.5995	* 1.4879	* 1.5844	* 1.7090	* 1.5920	* .7532	*
	* 1.7435	* 1.8807	* 2.0744	* 2.0348	* 1.8957	* 2.0528	* 4.3071	*
14	* 1.3795	* 1.6418	* 1.6700	* 1.5313	* .9710	* .7543	*	*
	* 2.1730	* 1.8454	* 1.8456	* 2.0782	* 3.3183	* 4.3071	*	*
15	* .7564	* .9472	* .8366	* .7337	* F-SUB-Q			
	* 3.9542	* 3.1922	* 3.6528	* 4.2530	* M-SUB-Q			

AT 50% POWER, 200 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8561	* 1.2983	* 1.5063	* 1.6743	* 1.6125	* 1.6190	* 1.3145	* .7207
	* 3.4137	* 2.2043	* 1.8843	* 1.6986	* 1.7617	* 1.7578	* 2.1666	* 3.9502
9	* 1.2983	* 1.4229	* 1.6147	* 1.6071	* 1.6472	* 1.5258	* 1.5551	* .8995
	* 2.2043	* 2.0047	* 1.7677	* 1.7710	* 1.7321	* 1.8687	* 1.8468	* 3.1944
10	* 1.5063	* 1.6180	* 1.5952	* 1.6548	* 1.5486	* 1.4294	* 1.5800	* .7954
	* 1.8843	* 1.7638	* 1.8007	* 1.7495	* 1.8748	* 2.0376	* 1.8462	* 3.6468
11	* 1.6743	* 1.6093	* 1.6570	* 1.5746	* 1.6288	* 1.5237	* 1.4554	* .6990
	* 1.6986	* 1.7690	* 1.7463	* 1.8712	* 1.8655	* 2.0003	* 2.0517	* 4.2180
12	* 1.6125	* 1.6483	* 1.5475	* 1.6288	* 1.6288	* 1.6310	* .9331	*
	* 1.7617	* 1.7309	* 1.8756	* 1.8668	* 1.8702	* 1.8745	* 3.2728	*
13	* 1.6190	* 1.5248	* 1.4294	* 1.5237	* 1.6310	* 1.5237	* .7250	*
	* 1.7578	* 1.8709	* 2.0384	* 2.0003	* 1.8745	* 2.0241	* 4.2359	*
14	* 1.3145	* 1.5562	* 1.5800	* 1.4554	* .9331	* .7250	*	*
	* 2.1666	* 1.8475	* 1.8455	* 2.0517	* 3.2706	* 4.2359	*	*
15	* .7207	* .9016	* .7954	* .7001	* F-SUB-Q			
	* 3.9502	* 3.1879	* 3.6440	* 4.2142	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 155 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 200 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8214	* 1.2398	* 1.4272	* 1.5735	* 1.5291	* 1.5226	* 1.2463	* .6827
	* 3.3128	* 2.1901	* 1.9005	* 1.7299	* 1.7786	* 1.7919	* 2.1918	* 4.0089
9	* 1.2398	* 1.3503	* 1.5172	* 1.5226	* 1.5486	* 1.4500	* 1.4706	* .8475
	* 2.1901	* 2.0118	* 1.7982	* 1.7887	* 1.7634	* 1.8845	* 1.8718	* 3.2550
10	* 1.4272	* 1.5193	* 1.5107	* 1.5497	* 1.4695	* 1.3655	* 1.4868	* .7510
	* 1.9005	* 1.7941	* 1.8127	* 1.7760	* 1.8817	* 2.0360	* 1.8741	* 3.6997
11	* 1.5735	* 1.5237	* 1.5529	* 1.4923	* 1.5367	* 1.4565	* 1.3774	* .6600
	* 1.7299	* 1.7860	* 1.7740	* 1.8700	* 1.8657	* 1.9952	* 2.0580	* 4.2691
12	* 1.5291	* 1.5497	* 1.4695	* 1.5367	* 1.5562	* 1.5497	* .8908	*
	* 1.7786	* 1.7620	* 1.8825	* 1.8671	* 1.8786	* 1.8919	* 3.2719	*
13	* 1.5226	* 1.4489	* 1.3665	* 1.4565	* 1.5497	* 1.4467	* .6914	*
	* 1.7919	* 1.8853	* 2.0360	* 1.9943	* 1.8926	* 2.0415	* 4.2659	*
14	* 1.2463	* 1.4717	* 1.4879	* 1.3785	* .8908	* .6914	*	*
	* 2.1918	* 1.8718	* 1.8733	* 2.0571	* 3.2675	* 4.2621	*	*
15	* .6827	* .8496	* .7521	* .6600	* F-SUB-Q			
	* 4.0089	* 3.2462	* 3.6967	* 4.2617	* M-SUB-Q			

AT 50% POWER, 200 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7434	* 1.1140	* 1.2744	* 1.3828	* 1.3730	* 1.3373	* 1.1151	* .6101
	* 3.5073	* 2.3481	* 2.0552	* 1.9034	* 1.9142	* 1.9754	* 2.3758	* 4.3564
9	* 1.1140	* 1.2072	* 1.3297	* 1.3600	* 1.3622	* 1.3004	* 1.2907	* .7467
	* 2.3481	* 2.1699	* 1.9797	* 1.9345	* 1.9392	* 2.0339	* 2.0656	* 3.5832
10	* 1.2744	* 1.3330	* 1.3492	* 1.3579	* 1.3145	* 1.2246	* 1.2831	* .6611
	* 2.0552	* 1.9756	* 1.9578	* 1.9537	* 2.0280	* 2.1949	* 2.1004	* 4.0791
11	* 1.3828	* 1.3622	* 1.3611	* 1.3319	* 1.3535	* 1.3080	* 1.2018	* .5809
	* 1.9034	* 1.9314	* 1.9513	* 2.0118	* 2.0247	* 2.1130	* 2.2726	* 4.6836
12	* 1.3730	* 1.3633	* 1.3134	* 1.3535	* 1.3980	* 1.3665	* .7976	*
	* 1.9142	* 1.9368	* 2.0297	* 2.0264	* 1.9800	* 2.0378	* 3.4867	*
13	* 1.3373	* 1.2994	* 1.2246	* 1.3080	* 1.3665	* 1.2679	* .6166	*
	* 1.9754	* 2.0365	* 2.1949	* 2.1139	* 2.0378	* 2.2354	* 4.5849	*
14	* 1.1151	* 1.2907	* 1.2831	* 1.2029	* .7976	* .6166	*	*
	* 2.3758	* 2.0647	* 2.1013	* 2.2736	* 3.4867	* 4.5849	*	*
15	* .6101	* .7478	* .6611	* .5809	* F-SUB-Q			
	* 4.3564	* 3.5803	* 4.0723	* 4.6880	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 156 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 200 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6101 *	* .8388 *	* .9645 *	* 1.1227 *	* 1.0945 *	* 1.0718 *	* .8843 *	* .4887 *
	* 4.1706 *	* 3.0424 *	* 2.6472 *	* 2.2852 *	* 2.3438 *	* 2.4054 *	* 2.9292 *	* 5.3252 *
9	* .8388 *	* .9211 *	* 1.0804 *	* 1.0328 *	* 1.1119 *	* 1.0068 *	* .9905 *	* .5744 *
	* 3.0424 *	* 2.7740 *	* 2.3756 *	* 2.4850 *	* 2.3130 *	* 2.5654 *	* 2.6276 *	* 4.5620 *
10	* .9645 *	* 1.0826 *	* 1.0284 *	* 1.1054 *	* .9948 *	* .9168 *	* .9569 *	* .5148 *
	* 2.6472 *	* 2.3708 *	* 2.4995 *	* 2.3370 *	* 2.6079 *	* 2.8574 *	* 2.7399 *	* 5.1017 *
11	* 1.1227 *	* 1.0338 *	* 1.1065 *	* 1.0078 *	* 1.1021 *	* 1.0338 *	* .9266 *	* .4562 *
	* 2.2852 *	* 2.4824 *	* 2.3313 *	* 2.5826 *	* 2.4107 *	* 2.5895 *	* 2.8762 *	* 5.8148 *
12	* 1.0945 *	* 1.1130 *	* .9948 *	* 1.1021 *	* 1.1075 *	* 1.0631 *	* .6383 *	
	* 2.3438 *	* 2.3119 *	* 2.6094 *	* 2.4096 *	* 2.4144 *	* 2.5328 *	* 4.2224 *	
13	* 1.0718 *	* 1.0057 *	* .9179 *	* 1.0338 *	* 1.0631 *	* .9677 *	* .4909 *	
	* 2.4054 *	* 2.5668 *	* 2.8540 *	* 2.5880 *	* 2.5328 *	* 2.8185 *	* 5.5766 *	
14	* .8843 *	* .9916 *	* .9580 *	* .9266 *	* .6383 *	* .4909 *		
	* 2.9292 *	* 2.6247 *	* 2.7399 *	* 2.8778 *	* 4.2224 *	* 5.5766 *		
15	* .4887 *	* .5754 *	* .5148 *	* .4562 *	F-SUB-Q			
	* 5.3252 *	* 4.5491 *	* 5.0911 *	* 5.8148 *	M-SUB-Q			

AT 50% POWER, 200 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .4107 *	* .3728 *	* .4324 *	* .5039 *	* .4649 *	* .4790 *	* .3869 *	* .2341 *
	* 6.0770 *	* 6.7039 *	* 5.7675 *	* 4.9649 *	* 5.3936 *	* 5.2560 *	* 6.5370 *	* 10.8815 *
9	* .3728 *	* .4237 *	* .4855 *	* .4530 *	* .4996 *	* .4400 *	* .4053 *	* .2525 *
	* 6.7039 *	* 5.8891 *	* 5.1428 *	* 5.5257 *	* 5.0228 *	* 5.7184 *	* 6.2689 *	* 10.1383 *
10	* .4324 *	* .4866 *	* .4476 *	* .4963 *	* .4400 *	* .3934 *	* .3945 *	* .2493 *
	* 5.7675 *	* 5.1372 *	* 5.6176 *	* 5.0766 *	* 5.7259 *	* 6.4664 *	* 6.5008 *	* 10.2919 *
11	* .5039 *	* .4541 *	* .4963 *	* .4443 *	* .4920 *	* .4324 *	* .3674 *	* .2167 *
	* 4.9649 *	* 5.5257 *	* 5.0606 *	* 5.6849 *	* 5.2510 *	* 5.9936 *	* 7.0624 *	* 11.9231 *
12	* .4649 *	* .4996 *	* .4411 *	* .4920 *	* .4638 *	* .4378 *	* .3110 *	
	* 5.3936 *	* 5.0228 *	* 5.7259 *	* 5.2510 *	* 5.5781 *	* 5.9854 *	* 8.4303 *	
13	* .4790 *	* .4400 *	* .3934 *	* .4324 *	* .4378 *	* .3890 *	* .2373 *	
	* 5.2560 *	* 5.7184 *	* 6.4664 *	* 6.0007 *	* 5.9854 *	* 6.8001 *	* 11.2188 *	
14	* .3869 *	* .4053 *	* .3945 *	* .3674 *	* .3110 *	* .2373 *		
	* 6.5370 *	* 6.2767 *	* 6.5008 *	* 7.0722 *	* 8.4303 *	* 11.2188 *		
15	* .2341 *	* .2525 *	* .2503 *	* .2167 *	F-SUB-Q			
	* 10.8815 *	* 10.1383 *	* 10.2487 *	* 11.9231 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 157 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 300 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .4281 *	* .4421 *	* .5169 *	* .5906 *	* .5700 *	* .5494 *	* .4042 *	* .2384 *
	* 4.4456 *	* 4.7816 *	* 4.1858 *	* 3.6850 *	* 3.9661 *	* 3.8230 *	* 4.6410 *	* 7.1157 *
9	* .4421 *	* .4508 *	* .5256 *	* .5527 *	* .5884 *	* .5332 *	* .4660 *	* .3121 *
	* 4.7816 *	* 4.3050 *	* 3.8111 *	* 4.0495 *	* 3.7220 *	* 4.1570 *	* 4.4049 *	* 6.6997 *
10	* .5169 *	* .5267 *	* .4378 *	* .5364 *	* .5267 *	* .4996 *	* .4747 *	* .3132 *
	* 4.1858 *	* 3.8077 *	* 4.1521 *	* 3.8077 *	* 4.2181 *	* 4.5794 *	* 4.6073 *	* 6.8815 *
11	* .5906 *	* .5527 *	* .5364 *	* .4757 *	* .4974 *	* .4671 *	* .4302 *	* .2828 *
	* 3.6850 *	* 4.0486 *	* 3.8043 *	* 4.3177 *	* 4.1388 *	* 4.7010 *	* 4.9471 *	* 7.7413 *
12	* .5700 *	* .5884 *	* .5267 *	* .4974 *	* .3988 *	* .3793 *	* .3392 *	
	* 3.9661 *	* 3.7220 *	* 4.2149 *	* 4.1388 *	* 4.3437 *	* 4.5792 *	* 6.2919 *	
13	* .5494 *	* .5332 *	* .4996 *	* .4671 *	* .3793 *	* .3273 *	* .2417 *	
	* 3.8230 *	* 4.1570 *	* 4.5794 *	* 4.7010 *	* 4.5782 *	* 5.0924 *	* 8.0156 *	
14	* .4042 *	* .4660 *	* .4747 *	* .4302 *	* .3392 *	* .2417 *		
	* 4.6410 *	* 4.4049 *	* 4.6062 *	* 4.9404 *	* 6.2919 *	* 8.0156 *		
15	* .2384 *	* .3121 *	* .3132 *	* .2828 *	F-SUB-Q			
	* 7.1157 *	* 6.6974 *	* 6.8731 *	* 7.7413 *	M-SUB-Q			

AT 50% POWER, 300 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .5787 *	* .9721 *	* 1.1314 *	* 1.1693 *	* 1.2333 *	* 1.1075 *	* .8290 *	* .4617 *
	* 3.3230 *	* 2.3095 *	* 2.0045 *	* 1.9572 *	* 1.9178 *	* 2.0109 *	* 2.2749 *	* 3.8439 *
9	* .9721 *	* .9840 *	* 1.0620 *	* 1.2116 *	* 1.1563 *	* 1.1650 *	* 1.0328 *	* .6578 *
	* 2.3095 *	* 2.1190 *	* 2.0174 *	* 1.9153 *	* 1.9819 *	* 1.9833 *	* 2.0833 *	* 3.2796 *
10	* 1.1314 *	* 1.0631 *	* .8897 *	* 1.0750 *	* 1.1639 *	* 1.1227 *	* 1.0599 *	* .6123 *
	* 2.0045 *	* 2.0155 *	* 1.9663 *	* 2.0193 *	* 2.0146 *	* 2.1329 *	* 2.1614 *	* 3.7563 *
11	* 1.1693 *	* 1.2127 *	* 1.0750 *	* 1.0414 *	* .9970 *	* 1.0273 *	* .9710 *	* .5473 *
	* 1.9572 *	* 1.9143 *	* 2.0174 *	* 2.0855 *	* 2.1882 *	* 2.2221 *	* 2.3255 *	* 4.2141 *
12	* 1.2333 *	* 1.1563 *	* 1.1628 *	* .9970 *	* .8301 *	* .8540 *	* .6448 *	
	* 1.9178 *	* 1.9819 *	* 2.0146 *	* 2.1882 *	* 2.0458 *	* 2.1674 *	* 3.4265 *	
13	* 1.1075 *	* 1.1639 *	* 1.1227 *	* 1.0284 *	* .8550 *	* .7380 *	* .4649 *	
	* 2.0109 *	* 1.9835 *	* 2.1329 *	* 2.2210 *	* 2.1674 *	* 2.3544 *	* 4.3078 *	
14	* .8290 *	* 1.0328 *	* 1.0599 *	* .9710 *	* .6448 *	* .4649 *		
	* 2.2749 *	* 2.0833 *	* 2.1614 *	* 2.3255 *	* 3.4244 *	* 4.3078 *		
15	* .4617 *	* .6578 *	* .6123 *	* .5473 *	F-SUB-Q			
	* 3.8439 *	* 3.2766 *	* 3.7563 *	* 4.2094 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 158 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 300 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6871	* 1.1715	* 1.3871	* 1.4890	* 1.5053	* 1.4153	* 1.0328	* .5744
	* 3.0038	* 2.0110	* 1.7172	* 1.6033	* 1.6421	* 1.6361	* 1.9479	* 3.3230
9	* 1.1715	* 1.2007	* 1.3535	* 1.4879	* 1.4717	* 1.4218	* 1.3113	* .8149
	* 2.0110	* 1.8251	* 1.6577	* 1.6334	* 1.6260	* 1.6983	* 1.7245	* 2.7810
10	* 1.3871	* 1.3546	* 1.1097	* 1.3687	* 1.4186	* 1.3546	* 1.3579	* .7521
	* 1.7172	* 1.6558	* 1.6773	* 1.6557	* 1.7238	* 1.8362	* 1.7542	* 3.2160
11	* 1.4890	* 1.4890	* 1.3687	* 1.2798	* 1.2636	* 1.2408	* 1.2311	* .6686
	* 1.6033	* 1.6322	* 1.6544	* 1.7779	* 1.7801	* 1.8840	* 1.8986	* 3.5879
12	* 1.5053	* 1.4717	* 1.4175	* 1.2636	* 1.0241	* 1.0696	* .7759	*
	* 1.6421	* 1.6254	* 1.7240	* 1.7801	* 1.7479	* 1.7752	* 2.9366	*
13	* 1.4153	* 1.4218	* 1.3546	* 1.2408	* 1.0696	* .9363	* .5592	*
	* 1.6361	* 1.6984	* 1.8362	* 1.8832	* 1.7746	* 1.9101	* 3.6838	*
14	* 1.0328	* 1.3113	* 1.3579	* 1.2311	* .7759	* .5603	*	*
	* 1.9479	* 1.7245	* 1.7540	* 1.8987	* 2.9362	* 3.6838	*	*
15	* .5744	* .8160	* .7521	* .6686	* F-SUB-Q			
	* 3.3230	* 2.7775	* 3.2136	* 3.5879	* M-SUB-Q			

AT 50% POWER, 300 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7488	* 1.2929	* 1.5649	* 1.7393	* 1.6949	* 1.6656	* 1.2159	* .6806
	* 2.9595	* 1.9374	* 1.6175	* 1.4388	* 1.5347	* 1.4701	* 1.8314	* 3.1598
9	* 1.2929	* 1.3730	* 1.5790	* 1.6808	* 1.7187	* 1.5985	* 1.5258	* .9352
	* 1.9374	* 1.7310	* 1.4999	* 1.5291	* 1.4606	* 1.5961	* 1.5712	* 2.6040
10	* 1.5649	* 1.5811	* 1.3156	* 1.5930	* 1.5887	* 1.4912	* 1.5714	* .8475
	* 1.6175	* 1.4983	* 1.5736	* 1.4923	* 1.6213	* 1.7452	* 1.5895	* 3.0144
11	* 1.7393	* 1.6808	* 1.5941	* 1.4532	* 1.4587	* 1.3665	* 1.4056	* .7467
	* 1.4388	* 1.5281	* 1.4911	* 1.6662	* 1.5971	* 1.7642	* 1.7271	* 3.3532
12	* 1.6949	* 1.7198	* 1.5887	* 1.4587	* 1.1563	* 1.2159	* .8540	*
	* 1.5347	* 1.4601	* 1.6214	* 1.5971	* 1.6339	* 1.6126	* 2.7674	*
13	* 1.6656	* 1.5974	* 1.4912	* 1.3665	* 1.2170	* 1.0772	* .6177	*
	* 1.4701	* 1.5966	* 1.7451	* 1.7640	* 1.6122	* 1.7237	* 3.4611	*
14	* 1.2159	* 1.5258	* 1.5714	* 1.4056	* .8540	* .6177	*	*
	* 1.8314	* 1.5710	* 1.5894	* 1.7271	* 2.7674	* 3.4590	*	*
15	* .6806	* .9363	* .8475	* .7467	* F-SUB-Q			
	* 3.1598	* 2.6009	* 3.0124	* 3.3536	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 159 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 300 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7705	* 1.3438	* 1.6461	* 1.8618	* 1.7762	* 1.7968	* 1.3535	* .7781
	* 3.1001	* 2.0096	* 1.6547	* 1.4316	* 1.5577	* 1.4652	* 1.8676	* 3.2416
9	* 1.3438	* 1.4814	* 1.7187	* 1.7664	* 1.8358	* 1.6776	* 1.6418	* 1.0013
	* 2.0096	* 1.7778	* 1.4978	* 1.5569	* 1.4528	* 1.6281	* 1.5776	* 2.6566
10	* 1.6461	* 1.7209	* 1.5399	* 1.7372	* 1.6581	* 1.5345	* 1.6635	* .8865
	* 1.6547	* 1.4961	* 1.6015	* 1.4854	* 1.6554	* 1.7893	* 1.5898	* 3.0692
11	* 1.8618	* 1.7675	* 1.7383	* 1.5670	* 1.5540	* 1.4034	* 1.4673	* .7738
	* 1.4316	* 1.5559	* 1.4837	* 1.6980	* 1.5900	* 1.7978	* 1.7317	* 3.3996
12	* 1.7762	* 1.8358	* 1.6581	* 1.5540	* 1.2083	* 1.2658	* .8745	*
	* 1.5577	* 1.4523	* 1.6560	* 1.5900	* 1.6620	* 1.6160	* 2.8301	*
13	* 1.7968	* 1.6765	* 1.5345	* 1.4034	* 1.2658	* 1.1281	* .6318	*
	* 1.4652	* 1.6289	* 1.7901	* 1.7971	* 1.6155	* 1.7208	* 3.5329	*
14	* 1.3535	* 1.6418	* 1.6635	* 1.4684	* .8745	* .6318	*	*
	* 1.8676	* 1.5774	* 1.5892	* 1.7310	* 2.8301	* 3.5324	*	*
15	* .7781	* 1.0035	* .8865	* .7738	* F-SUB-Q			
	* 3.2416	* 2.6529	* 3.0685	* 3.3996	* M-SUB-Q			

AT 50% POWER, 300 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7792	* 1.3633	* 1.6808	* 1.9127	* 1.8065	* 1.8564	* 1.4652	* .8355
	* 3.3081	* 2.1424	* 1.7460	* 1.4867	* 1.6313	* 1.5222	* 1.9619	* 3.4131
9	* 1.3633	* 1.5389	* 1.7968	* 1.8000	* 1.8824	* 1.7101	* 1.7025	* 1.0349
	* 2.1424	* 1.8841	* 1.5596	* 1.6368	* 1.5061	* 1.7151	* 1.6434	* 2.7915
10	* 1.6808	* 1.7989	* 1.7090	* 1.8109	* 1.6808	* 1.5399	* 1.6960	* .9016
	* 1.7460	* 1.5577	* 1.6859	* 1.5434	* 1.7405	* 1.8861	* 1.6428	* 3.2020
11	* 1.9127	* 1.8011	* 1.8130	* 1.6234	* 1.5920	* 1.4034	* 1.4803	* .7792
	* 1.4867	* 1.6356	* 1.5416	* 1.7868	* 1.6577	* 1.9014	* 1.8108	* 3.5688
12	* 1.8065	* 1.8835	* 1.6808	* 1.5920	* 1.2224	* 1.2712	* .8724	*
	* 1.6313	* 1.5055	* 1.7411	* 1.6577	* 1.7573	* 1.6935	* 2.9987	*
13	* 1.8564	* 1.7090	* 1.5399	* 1.4034	* 1.2712	* 1.1346	* .6296	*
	* 1.5222	* 1.7158	* 1.8861	* 1.9005	* 1.6935	* 1.8043	* 3.7476	*
14	* 1.4652	* 1.7025	* 1.6960	* 1.4803	* .8724	* .6296	*	*
	* 1.9619	* 1.6432	* 1.6423	* 1.8109	* 2.9979	* 3.7470	*	*
15	* .8355	* 1.0360	* .9016	* .7792	* F-SUB-Q			
	* 3.4131	* 2.7874	* 3.1998	* 3.5688	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 160 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 300 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7835	* 1.3752	* 1.7014	* 1.9442	* 1.8239	* 1.8889	* 1.5020	* .8594
	* 3.5055	* 2.2776	* 1.8393	* 1.5420	* 1.7049	* 1.5766	* 2.0541	* 3.5746
9	* 1.3752	* 1.5670	* 1.8423	* 1.8195	* 1.9106	* 1.7263	* 1.7372	* 1.0534
	* 2.2776	* 2.0002	* 1.6327	* 1.7130	* 1.5620	* 1.7903	* 1.7040	* 2.9031
10	* 1.7014	* 1.8445	* 1.7545	* 1.8585	* 1.6917	* 1.5399	* 1.7133	* .9136
	* 1.8393	* 1.6304	* 1.7800	* 1.6091	* 1.8262	* 1.9912	* 1.7103	* 3.3386
11	* 1.9442	* 1.8206	* 1.8607	* 1.6483	* 1.6115	* 1.4012	* 1.4858	* .7824
	* 1.5420	* 1.7117	* 1.6073	* 1.8748	* 1.7495	* 2.0217	* 1.9131	* 3.7744
12	* 1.8239	* 1.9106	* 1.6917	* 1.6115	* 1.2267	* 1.2723	* .8702	*
	* 1.7049	* 1.5615	* 1.8270	* 1.7495	* 1.8673	* 1.7851	* 3.1860	*
13	* 1.8889	* 1.7253	* 1.5399	* 1.4012	* 1.2723	* 1.1379	* .6275	*
	* 1.5766	* 1.7910	* 1.9910	* 2.0208	* 1.7848	* 1.9035	* 3.9832	*
14	* 1.5020	* 1.7383	* 1.7144	* 1.4858	* .8713	* .6275	*	*
	* 2.0541	* 1.7033	* 1.7103	* 1.9131	* 3.1851	* 3.9812	*	*
15	* .8594	* 1.0544	* .9136	* .7835	* F-SUB-Q			
	* 3.5746	* 2.8994	* 3.3386	* 3.7744	* M-SUB-Q			

AT 50% POWER, 300 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7705	* 1.3557	* 1.6808	* 1.9355	* 1.8000	* 1.8791	* 1.4868	* .8518
	* 3.8465	* 2.4751	* 1.9920	* 1.6619	* 1.8475	* 1.6983	* 2.2107	* 3.8442
9	* 1.3557	* 1.5508	* 1.8401	* 1.7957	* 1.8997	* 1.7014	* 1.7296	* 1.0414
	* 2.4751	* 2.1618	* 1.7526	* 1.8563	* 1.6864	* 1.9410	* 1.8312	* 3.1297
10	* 1.6808	* 1.8423	* 1.7404	* 1.8542	* 1.6646	* 1.5085	* 1.6992	* .9027
	* 1.9920	* 1.7505	* 1.9178	* 1.7303	* 1.9882	* 2.1600	* 1.8393	* 3.5990
11	* 1.9355	* 1.7968	* 1.8564	* 1.6277	* 1.5985	* 1.3741	* 1.4673	* .7694
	* 1.6619	* 1.8548	* 1.7284	* 2.0352	* 1.8909	* 2.1982	* 2.0795	* 4.0943
12	* 1.8000	* 1.8997	* 1.6646	* 1.5974	* 1.2083	* 1.2560	* .8540	*
	* 1.8475	* 1.6852	* 1.9890	* 1.8912	* 2.0344	* 1.9415	* 3.4635	*
13	* 1.8791	* 1.7003	* 1.5085	* 1.3741	* 1.2560	* 1.1260	* .6155	*
	* 1.6983	* 1.9419	* 2.1600	* 2.1971	* 1.9415	* 2.0764	* 4.3558	*
14	* 1.4868	* 1.7296	* 1.6992	* 1.4684	* .8540	* .6166	*	*
	* 2.2107	* 1.8307	* 1.8393	* 2.0796	* 3.4625	* 4.3517	*	*
15	* .8518	* 1.0436	* .9027	* .7694	* F-SUB-Q			
	* 3.8442	* 3.1254	* 3.5990	* 4.0943	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 161 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 300 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7629	* 1.3373	* 1.6591	* 1.9181	* 1.7751	* 1.8596	* 1.4684	* .8420
	* 4.2617	* 2.7304	* 2.1941	* 1.8224	* 2.0110	* 1.8574	* 2.4245	* 4.2031
9	* 1.3373	* 1.5324	* 1.8260	* 1.7708	* 1.8802	* 1.6754	* 1.7112	* 1.0284
	* 2.7304	* 2.3798	* 1.9356	* 2.0309	* 1.8427	* 2.1124	* 2.0051	* 3.3924
10	* 1.6591	* 1.8293	* 1.7198	* 1.8390	* 1.6386	* 1.4814	* 1.6787	* .8919
	* 2.1941	* 1.9325	* 2.1101	* 1.9144	* 2.1686	* 2.3568	* 2.0010	* 3.8736
11	* 1.9181	* 1.7718	* 1.8412	* 1.6050	* 1.5811	* 1.3514	* 1.4489	* .7586
	* 1.8224	* 2.0290	* 1.9119	* 2.2423	* 2.0878	* 2.4109	* 2.2918	* 4.4609
12	* 1.7751	* 1.8813	* 1.6375	* 1.5800	* 1.1964	* 1.2430	* .8420	*
	* 2.0110	* 1.8419	* 2.1697	* 2.0878	* 2.2368	* 2.1367	* 3.7902	*
13	* 1.8596	* 1.6743	* 1.4814	* 1.3525	* 1.2430	* 1.1173	* .6080	*
	* 1.8574	* 2.1134	* 2.3568	* 2.4101	* 2.1357	* 2.2813	* 4.7478	*
14	* 1.4684	* 1.7122	* 1.6797	* 1.4489	* .8420	* .6090	*	*
	* 2.4245	* 2.0051	* 2.0010	* 2.2905	* 3.7902	* 4.7448	*	*
15	* .8420	* 1.0306	* .8919	* .7586	* F-SUB-Q			
	* 4.2031	* 3.3874	* 3.8736	* 4.4609	* M-SUB-Q			

AT 50% POWER, 300 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7478	* 1.2972	* 1.6071	* 1.8553	* 1.7198	* 1.7968	* 1.4229	* .8171
	* 4.7660	* 3.0679	* 2.4539	* 2.0628	* 2.2547	* 2.0948	* 2.6734	* 4.6211
9	* 1.2972	* 1.4858	* 1.7675	* 1.7144	* 1.8174	* 1.6201	* 1.6548	* .9970
	* 3.0679	* 2.6754	* 2.1902	* 2.2761	* 2.0893	* 2.3631	* 2.2466	* 3.7558
10	* 1.6071	* 1.7708	* 1.6667	* 1.7794	* 1.5844	* 1.4316	* 1.6223	* .8637
	* 2.4539	* 2.1870	* 2.3664	* 2.1604	* 2.4411	* 2.6594	* 2.2665	* 4.3244
11	* 1.8553	* 1.7155	* 1.7816	* 1.5551	* 1.5291	* 1.3102	* 1.4001	* .7358
	* 2.0628	* 2.2739	* 2.1584	* 2.5132	* 2.3936	* 2.7328	* 2.6194	* 5.0174
12	* 1.7198	* 1.8184	* 1.5844	* 1.5291	* 1.1736	* 1.2105	* .8182	*
	* 2.2547	* 2.0882	* 2.4424	* 2.3936	* 2.5404	* 2.4439	* 4.2813	*
13	* 1.7968	* 1.6190	* 1.4316	* 1.3113	* 1.2105	* 1.0902	* .5928	*
	* 2.0948	* 2.3643	* 2.6594	* 2.7328	* 2.4434	* 2.6067	* 5.3601	*
14	* 1.4229	* 1.6548	* 1.6234	* 1.4001	* .8182	* .5928	*	*
	* 2.6734	* 2.2467	* 2.2653	* 2.6193	* 4.2813	* 5.3577	*	*
15	* .8171	* .9992	* .8648	* .7358	* F-SUB-Q			
	* 4.6211	* 3.7497	* 4.3244	* 5.0174	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 162 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 300 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7445	* 1.2788	* 1.5844	* 1.8466	* 1.6971	* 1.7859	* 1.4034	* .8052
	* 5.0291	* 3.3636	* 2.7518	* 2.3133	* 2.5320	* 2.3466	* 2.9766	* 5.1361
9	* 1.2788	* 1.4662	* 1.7599	* 1.6906	* 1.8076	* 1.5963	* 1.6451	* .9840
	* 3.3636	* 2.9931	* 2.4493	* 2.5559	* 2.3459	* 2.6526	* 2.5085	* 4.1779
10	* 1.5844	* 1.7632	* 1.6461	* 1.7718	* 1.5605	* 1.4077	* 1.6147	* .8540
	* 2.7518	* 2.4468	* 2.6495	* 2.4230	* 2.7536	* 3.0040	* 2.5399	* 4.8202
11	* 1.8466	* 1.6917	* 1.7740	* 1.5345	* 1.5226	* 1.2972	* 1.3936	* .7272
	* 2.3133	* 2.5545	* 2.4205	* 2.7407	* 2.5695	* 2.9581	* 2.9481	* 5.6137
12	* 1.6971	* 1.8087	* 1.5605	* 1.5215	* 1.1758	* 1.2148	* .8117	*
	* 2.5320	* 2.3447	* 2.7553	* 2.5695	* 2.7553	* 2.6708	* 4.6667	*
13	* 1.7859	* 1.5952	* 1.4077	* 1.2972	* 1.2159	* 1.0978	* .5906	*
	* 2.3466	* 2.6541	* 3.0040	* 2.9581	* 2.6693	* 2.8687	* 5.9087	*
14	* 1.4034	* 1.6451	* 1.6147	* 1.3936	* .8117	* .5917	*	*
	* 2.9766	* 2.5072	* 2.5399	* 2.9481	* 4.6667	* 5.9013	*	*
15	* .8052	* .9862	* .8550	* .7272	F-SUB-Q			
	* 5.1361	* 4.1704	* 4.8202	* 5.6137	M-SUB-Q			

AT 50% POWER, 300 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7315	* 1.2538	* 1.5540	* 1.8174	* 1.6646	* 1.7556	* 1.3763	* .7889
	* 5.3801	* 3.5115	* 2.8143	* 2.3952	* 2.6194	* 2.4765	* 3.1720	* 5.5388
9	* 1.2538	* 1.4381	* 1.7328	* 1.6570	* 1.7784	* 1.5649	* 1.6180	* .9656
	* 3.5115	* 3.0543	* 2.5233	* 2.6371	* 2.4518	* 2.7925	* 2.7012	* 4.5503
10	* 1.5540	* 1.7350	* 1.6158	* 1.7437	* 1.5302	* 1.3785	* 1.5898	* .8388
	* 2.8143	* 2.5206	* 2.7212	* 2.5192	* 2.8852	* 3.2045	* 2.7734	* 5.2535
11	* 1.8174	* 1.6591	* 1.7458	* 1.5063	* 1.4998	* 1.2766	* 1.3741	* .7152
	* 2.3952	* 2.6356	* 2.5165	* 2.9285	* 2.7603	* 3.1656	* 3.2052	* 6.2386
12	* 1.6646	* 1.7784	* 1.5291	* 1.4998	* 1.1617	* 1.2051	* .8019	*
	* 2.6194	* 2.4505	* 2.8870	* 2.7603	* 2.9506	* 2.8775	* 4.9909	*
13	* 1.7556	* 1.5638	* 1.3785	* 1.2766	* 1.2051	* 1.0935	* .5863	*
	* 2.4765	* 2.7942	* 3.2045	* 3.1635	* 2.8758	* 3.0948	* 6.3312	*
14	* 1.3763	* 1.6180	* 1.5898	* 1.3741	* .8019	* .5863	*	*
	* 3.1720	* 2.7012	* 2.7734	* 3.2052	* 4.9856	* 6.3312	*	*
15	* .7889	* .9677	* .8399	* .7152	F-SUB-Q			
	* 5.5388	* 4.5415	* 5.2535	* 6.2386	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 163 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 300 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7163	* 1.2257	* 1.5183	* 1.7740	* 1.6266	* 1.7133	* 1.3449	* .7716
	* 5.6975	* 3.6229	* 2.9086	* 2.4887	* 2.7093	* 2.5759	* 3.2772	* 5.7252
9	* 1.2257	* 1.4056	* 1.6917	* 1.6190	* 1.7350	* 1.5280	* 1.5800	* .9439
	* 3.6229	* 3.1542	* 2.6203	* 2.7266	* 2.5494	* 2.8907	* 2.8063	* 4.7061
10	* 1.5183	* 1.6949	* 1.5800	* 1.7036	* 1.4955	* 1.3481	* 1.5540	* .8214
	* 2.9086	* 2.6174	* 2.8113	* 2.6174	* 2.9861	* 3.3212	* 2.8836	* 5.4343
11	* 1.7740	* 1.6212	* 1.7057	* 1.4749	* 1.4684	* 1.2538	* 1.3460	* .7012
	* 2.4887	* 2.7250	* 2.6145	* 3.0579	* 2.9617	* 3.3784	* 3.3881	* 6.4556
12	* 1.6266	* 1.7361	* 1.4955	* 1.4673	* 1.1422	* 1.1877	* .7911	*
	* 2.7093	* 2.5480	* 2.9880	* 2.9617	* 3.1563	* 3.0900	* 5.3116	*
13	* 1.7133	* 1.5269	* 1.3481	* 1.2538	* 1.1877	* 1.0826	* .5809	*
	* 2.5759	* 2.8925	* 3.3212	* 3.3784	* 3.0900	* 3.3212	* 6.7326	*
14	* 1.3449	* 1.5800	* 1.5551	* 1.3470	* .7911	* .5809	*	*
	* 3.2772	* 2.8063	* 2.8819	* 3.3881	* 5.3116	* 6.7326	*	*
15	* .7716	* .9461	* .8214	* .7022	* F-SUB-Q			
	* 5.7252	* 4.6967	* 5.4343	* 6.4556	* M-SUB-Q			

AT 50% POWER, 300 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7174	* 1.2289	* 1.5215	* 1.7859	* 1.6299	* 1.7231	* 1.3481	* .7727
	* 5.4631	* 3.5897	* 2.8907	* 2.4678	* 2.6985	* 2.5577	* 3.2613	* 5.6769
9	* 1.2289	* 1.4099	* 1.7057	* 1.6234	* 1.7469	* 1.5302	* 1.5909	* .9482
	* 3.5897	* 3.1291	* 2.5943	* 2.7172	* 2.5302	* 2.8819	* 2.7847	* 4.6641
10	* 1.5215	* 1.7079	* 1.5865	* 1.7198	* 1.5009	* 1.3514	* 1.5692	* .8258
	* 2.8907	* 2.5915	* 2.7963	* 2.5958	* 2.9767	* 3.3118	* 2.8591	* 5.3784
11	* 1.7859	* 1.6245	* 1.7220	* 1.4836	* 1.4858	* 1.2668	* 1.3633	* .7077
	* 2.4678	* 2.7140	* 2.5915	* 3.0156	* 2.8261	* 3.2072	* 3.2549	* 6.3855
12	* 1.6299	* 1.7480	* 1.5009	* 1.4847	* 1.1585	* 1.2137	* .8041	*
	* 2.6985	* 2.5288	* 2.9786	* 2.8261	* 3.0089	* 2.9112	* 4.9824	*
13	* 1.7231	* 1.5291	* 1.3514	* 1.2679	* 1.2148	* 1.1140	* .5950	*
	* 2.5577	* 2.8836	* 3.3118	* 3.2072	* 2.9112	* 3.1140	* 6.2536	*
14	* 1.3481	* 1.5909	* 1.5692	* 1.3644	* .8041	* .5950	*	*
	* 3.2613	* 2.7830	* 2.8591	* 3.2545	* 4.9824	* 6.2395	*	*
15	* .7727	* .9493	* .8258	* .7077	* F-SUB-Q			
	* 5.6769	* 4.6549	* 5.3784	* 6.3855	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 164 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 300 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7196	* 1.2278	* 1.5193	* 1.7892	* 1.6255	* 1.7253	* 1.3427	* .7683
	* 4.9200	* 3.3093	* 2.7085	* 2.3118	* 2.5348	* 2.3944	* 3.0513	* 5.2793
9	* 1.2278	* 1.4099	* 1.7112	* 1.6190	* 1.7513	* 1.5248	* 1.5941	* .9461
	* 3.3093	* 2.9205	* 2.4191	* 2.5499	* 2.3655	* 2.7025	* 2.5912	* 4.3168
10	* 1.5193	* 1.7144	* 1.5876	* 1.7285	* 1.5020	* 1.3503	* 1.5779	* .8258
	* 2.7085	* 2.4153	* 2.6124	* 2.4131	* 2.7680	* 3.0720	* 2.6398	* 4.9633
11	* 1.7892	* 1.6212	* 1.7307	* 1.4923	* 1.5042	* 1.2842	* 1.3795	* .7109
	* 2.3118	* 2.5472	* 2.4106	* 2.7115	* 2.5357	* 2.8881	* 2.9204	* 5.7626
12	* 1.6255	* 1.7513	* 1.5020	* 1.5031	* 1.1845	* 1.2517	* .8204	*
	* 2.5348	* 2.3643	* 2.7680	* 2.5357	* 2.7103	* 2.6169	* 4.4992	*
13	* 1.7253	* 1.5248	* 1.3503	* 1.2842	* 1.2528	* 1.1596	* .6134	*
	* 2.3944	* 2.7040	* 3.0720	* 2.8881	* 2.6169	* 2.7985	* 5.6469	*
14	* 1.3427	* 1.5941	* 1.5779	* 1.3795	* .8204	* .6134	*	*
	* 3.0513	* 2.5885	* 2.6398	* 2.9173	* 4.4918	* 5.6469	*	*
15	* .7683	* .9472	* .8258	* .7109	* F-SUB-Q			
	* 5.2793	* 4.3089	* 4.9681	* 5.7636	* M-SUB-Q			

AT 50% POWER, 300 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7467	* 1.2398	* 1.5215	* 1.7924	* 1.6255	* 1.7253	* 1.3405	* .7662
	* 4.4490	* 2.9657	* 2.4056	* 2.0508	* 2.2547	* 2.1277	* 2.7192	* 4.7186
9	* 1.2398	* 1.4164	* 1.7177	* 1.6201	* 1.7534	* 1.5248	* 1.5963	* .9461
	* 2.9657	* 2.5936	* 2.1462	* 2.2657	* 2.0985	* 2.4033	* 2.3048	* 3.8553
10	* 1.5215	* 1.7209	* 1.5930	* 1.7393	* 1.5118	* 1.3579	* 1.5876	* .8279
	* 2.4056	* 2.1414	* 2.3171	* 2.1376	* 2.4575	* 2.7278	* 2.3430	* 4.4233
11	* 1.7924	* 1.6212	* 1.7415	* 1.5118	* 1.5345	* 1.3189	* 1.4012	* .7163
	* 2.0508	* 2.2635	* 2.1338	* 2.4508	* 2.2963	* 2.6225	* 2.6434	* 5.1818
12	* 1.6255	* 1.7545	* 1.5107	* 1.5334	* 1.2603	* 1.3286	* .8475	*
	* 2.2547	* 2.0984	* 2.4588	* 2.2956	* 2.4566	* 2.3736	* 4.0851	*
13	* 1.7253	* 1.5237	* 1.3579	* 1.3199	* 1.3297	* 1.2376	* .6426	*
	* 2.1277	* 2.4045	* 2.7293	* 2.6200	* 2.3736	* 2.5396	* 5.1390	*
14	* 1.3405	* 1.5963	* 1.5876	* 1.4012	* .8475	* .6437	*	*
	* 2.7192	* 2.3026	* 2.3408	* 2.6434	* 4.0851	* 5.1390	*	*
15	* .7662	* .9472	* .8290	* .7163	* F-SUB-Q			
	* 4.7186	* 3.8490	* 4.4271	* 5.1818	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 165 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 300 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8052	* 1.2593	* 1.5258	* 1.7870	* 1.6266	* 1.7187	* 1.3405	* .7662
	* 4.0230	* 2.6657	* 2.1657	* 1.8538	* 2.0306	* 1.9264	* 2.4538	* 4.2658
9	* 1.2593	* 1.4272	* 1.7177	* 1.6234	* 1.7502	* 1.5258	* 1.5930	* .9461
	* 2.6657	* 2.3293	* 1.9367	* 2.0386	* 1.8985	* 2.1668	* 2.0847	* 3.4833
10	* 1.5258	* 1.7209	* 1.6017	* 1.7448	* 1.5258	* 1.3698	* 1.5930	* .8312
	* 2.1657	* 1.9328	* 2.0801	* 1.9251	* 2.2056	* 2.4517	* 2.1122	* 3.9960
11	* 1.7870	* 1.6245	* 1.7469	* 1.5378	* 1.5855	* 1.3665	* 1.4207	* .7239
	* 1.8538	* 2.0368	* 1.9227	* 2.2105	* 2.0920	* 2.3857	* 2.3978	* 4.6539
12	* 1.6266	* 1.7513	* 1.5248	* 1.5855	* 1.4023	* 1.4467	* .8832	*
	* 2.0306	* 1.8963	* 2.2067	* 2.0929	* 2.2395	* 2.1725	* 3.7204	*
13	* 1.7187	* 1.5248	* 1.3698	* 1.3665	* 1.4467	* 1.3405	* .6795	*
	* 1.9264	* 2.1697	* 2.4493	* 2.3845	* 2.1732	* 2.3242	* 4.7042	*
14	* 1.3405	* 1.5930	* 1.5930	* 1.4207	* .8832	* .6806	*	*
	* 2.4538	* 2.0838	* 2.1130	* 2.3988	* 3.7204	* 4.7042	*	*
15	* .7662	* .9482	* .8312	* .7239	* F-SUB-Q			
	* 4.2658	* 3.4732	* 3.9960	* 4.6539	* M-SUB-Q			

AT 50% POWER, 300 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8572	* 1.2950	* 1.5540	* 1.8293	* 1.6548	* 1.7588	* 1.3600	* .7759
	* 3.5877	* 2.3832	* 1.9458	* 1.6557	* 1.8249	* 1.7232	* 2.2145	* 3.8668
9	* 1.2950	* 1.4587	* 1.7632	* 1.6516	* 1.7924	* 1.5519	* 1.6310	* .9623
	* 2.3832	* 2.0886	* 1.7253	* 1.8327	* 1.6937	* 1.9499	* 1.8640	* 3.1409
10	* 1.5540	* 1.7664	* 1.6364	* 1.7979	* 1.5627	* 1.4012	* 1.6407	* .8485
	* 1.9458	* 1.7228	* 1.8647	* 1.7117	* 1.9738	* 2.1946	* 1.8813	* 3.5863
11	* 1.8293	* 1.6537	* 1.8000	* 1.5865	* 1.6787	* 1.4532	* 1.4771	* .7413
	* 1.6557	* 1.8313	* 1.7104	* 1.9687	* 1.8654	* 2.1453	* 2.1211	* 4.1678
12	* 1.6548	* 1.7935	* 1.5616	* 1.6776	* 1.5421	* 1.5941	* .9298	*
	* 1.8249	* 1.6937	* 1.9762	* 1.8661	* 2.0042	* 1.9379	* 3.3578	*
13	* 1.7588	* 1.5508	* 1.4012	* 1.4532	* 1.5941	* 1.4814	* .7261	*
	* 1.7232	* 1.9515	* 2.1946	* 2.1460	* 1.9379	* 2.0742	* 4.2384	*
14	* 1.3600	* 1.6321	* 1.6407	* 1.4771	* .9298	* .7261	*	*
	* 2.2145	* 1.8640	* 1.8798	* 2.1218	* 3.3578	* 4.2384	*	*
15	* .7759	* .9645	* .8496	* .7423	* F-SUB-Q			
	* 3.8668	* 3.1346	* 3.5888	* 4.1678	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 166 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 300 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8735	* 1.3102	* 1.5638	* 1.8380	* 1.6635	* 1.7664	* 1.3665	* .7770
	* 3.2830	* 2.1725	* 1.7918	* 1.5286	* 1.6835	* 1.5913	* 2.0483	* 3.5895
9	* 1.3102	* 1.4717	* 1.7740	* 1.6624	* 1.8022	* 1.5605	* 1.6418	* .9667
	* 2.1725	* 1.9151	* 1.5893	* 1.6889	* 1.5635	* 1.7993	* 1.7198	* 2.9105
10	* 1.5638	* 1.7762	* 1.6505	* 1.8141	* 1.5800	* 1.4186	* 1.6581	* .8550
	* 1.7918	* 1.5872	* 1.7129	* 1.5730	* 1.8078	* 2.0113	* 1.7256	* 3.3138
11	* 1.8380	* 1.6635	* 1.8163	* 1.6104	* 1.7231	* 1.5042	* 1.5031	* .7488
	* 1.5286	* 1.6877	* 1.5704	* 1.8018	* 1.6980	* 1.9439	* 1.9456	* 3.8344
12	* 1.6635	* 1.8033	* 1.5790	* 1.7231	* 1.6093	* 1.6624	* .9569	*
	* 1.6835	* 1.5625	* 1.8079	* 1.6986	* 1.8165	* 1.7641	* 3.0537	*
13	* 1.7664	* 1.5594	* 1.4186	* 1.5042	* 1.6624	* 1.5508	* .7521	*
	* 1.5913	* 1.7994	* 2.0113	* 1.9431	* 1.7641	* 1.8926	* 3.8773	*
14	* 1.3665	* 1.6418	* 1.6581	* 1.5042	* .9569	* .7532	*	*
	* 2.0483	* 1.7203	* 1.7262	* 1.9456	* 3.0537	* 3.8741	*	*
15	* .7770	* .9677	* .8550	* .7499	* F-SUB-Q			
	* 3.5895	* 2.9051	* 3.3159	* 3.8373	* M-SUB-Q			

AT 50% POWER, 300 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8659	* 1.2983	* 1.5410	* 1.7924	* 1.6386	* 1.7253	* 1.3449	* .7640
	* 3.1101	* 2.0379	* 1.7063	* 1.4725	* 1.6073	* 1.5335	* 1.9618	* 3.4510
9	* 1.2983	* 1.4522	* 1.7296	* 1.6375	* 1.7588	* 1.5389	* 1.6071	* .9482
	* 2.0379	* 1.8162	* 1.5296	* 1.6106	* 1.5058	* 1.7156	* 1.6557	* 2.8008
10	* 1.5410	* 1.7328	* 1.6266	* 1.7740	* 1.5638	* 1.4077	* 1.6266	* .8410
	* 1.7063	* 1.5267	* 1.6290	* 1.5069	* 1.7108	* 1.9023	* 1.6535	* 3.1764
11	* 1.7924	* 1.6386	* 1.7762	* 1.5963	* 1.7047	* 1.5042	* 1.4814	* .7380
	* 1.4725	* 1.6095	* 1.5045	* 1.6944	* 1.6261	* 1.8423	* 1.8442	* 3.6569
12	* 1.6386	* 1.7599	* 1.5627	* 1.7036	* 1.6136	* 1.6548	* .9547	*
	* 1.6073	* 1.5044	* 1.7114	* 1.6261	* 1.7165	* 1.6812	* 2.9032	*
13	* 1.7253	* 1.5389	* 1.4077	* 1.5042	* 1.6548	* 1.5475	* .7532	*
	* 1.5335	* 1.7174	* 1.9023	* 1.8410	* 1.6812	* 1.7987	* 3.6831	*
14	* 1.3449	* 1.6071	* 1.6266	* 1.4814	* .9547	* .7532	*	*
	* 1.9618	* 1.6551	* 1.6524	* 1.8449	* 2.9032	* 3.6802	*	*
15	* .7640	* .9504	* .8410	* .7391	* F-SUB-Q			
	* 3.4510	* 2.7911	* 3.1764	* 3.6595	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 167 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 300 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8561	* 1.2798	* 1.5128	* 1.7491	* 1.6115	* 1.6862	* 1.3221	* .7478
	* 2.9221	* 1.9504	* 1.6539	* 1.4369	* 1.5562	* 1.4944	* 1.9055	* 3.3721
9	* 1.2798	* 1.4261	* 1.6852	* 1.6082	* 1.7166	* 1.5161	* 1.5714	* .9266
	* 1.9504	* 1.7548	* 1.4922	* 1.5603	* 1.4676	* 1.6608	* 1.6144	* 2.7394
10	* 1.5128	* 1.6884	* 1.5985	* 1.7318	* 1.5399	* 1.3904	* 1.5952	* .8236
	* 1.6539	* 1.4894	* 1.5755	* 1.4646	* 1.6483	* 1.8280	* 1.6042	* 3.0952
11	* 1.7491	* 1.6104	* 1.7339	* 1.5714	* 1.6776	* 1.4944	* 1.4576	* .7228
	* 1.4369	* 1.5593	* 1.4628	* 1.6258	* 1.5622	* 1.7651	* 1.7761	* 3.5625
12	* 1.6115	* 1.7177	* 1.5389	* 1.6765	* 1.6039	* 1.6353	* .9461	*
	* 1.5562	* 1.4667	* 1.6489	* 1.5628	* 1.6539	* 1.6289	* 2.7937	*
13	* 1.6862	* 1.5150	* 1.3904	* 1.4955	* 1.6353	* 1.5313	* .7467	*
	* 1.4944	* 1.6608	* 1.8287	* 1.7645	* 1.6284	* 1.7483	* 3.5769	*
14	* 1.3221	* 1.5724	* 1.5952	* 1.4576	* .9461	* .7467	*	*
	* 1.9055	* 1.6139	* 1.6036	* 1.7768	* 2.7905	* 3.5720	*	*
15	* .7478	* .9276	* .8236	* .7228	* F-SUB-Q			
	* 3.3721	* 2.7346	* 3.0971	* 3.5598	* M-SUB-Q			

AT 50% POWER, 300 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7987	* 1.1899	* 1.3969	* 1.5887	* 1.4988	* 1.5324	* 1.2257	* .6903
	* 3.0009	* 2.0193	* 1.7238	* 1.5230	* 1.6130	* 1.5855	* 1.9860	* 3.5393
9	* 1.1899	* 1.3199	* 1.5291	* 1.4879	* 1.5616	* 1.4088	* 1.4316	* .8453
	* 2.0193	* 1.8238	* 1.5824	* 1.6241	* 1.5559	* 1.7243	* 1.7112	* 2.9030
10	* 1.3969	* 1.5324	* 1.4782	* 1.5724	* 1.4261	* 1.2929	* 1.4424	* .7532
	* 1.7238	* 1.5803	* 1.6393	* 1.5504	* 1.7108	* 1.8944	* 1.7107	* 3.2736
11	* 1.5887	* 1.4890	* 1.5746	* 1.4532	* 1.5302	* 1.3947	* 1.3232	* .6611
	* 1.5230	* 1.6235	* 1.5484	* 1.6848	* 1.6306	* 1.8006	* 1.8810	* 3.7586
12	* 1.4988	* 1.5627	* 1.4251	* 1.5302	* 1.4966	* 1.4998	* .8789	*
	* 1.6130	* 1.5544	* 1.7114	* 1.6317	* 1.6779	* 1.6832	* 2.8724	*
13	* 1.5324	* 1.4077	* 1.2929	* 1.3947	* 1.4998	* 1.3969	* .6925	*
	* 1.5855	* 1.7249	* 1.8944	* 1.7999	* 1.6832	* 1.8313	* 3.6922	*
14	* 1.2257	* 1.4316	* 1.4424	* 1.3232	* .8789	* .6925	*	*
	* 1.9860	* 1.7112	* 1.7100	* 1.8802	* 2.8740	* 3.6922	*	*
15	* .6903	* .8475	* .7543	* .6611	* F-SUB-Q			
	* 3.5393	* 2.8976	* 3.2713	* 3.7613	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 168 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 300 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6730 *	* .9331 *	* 1.0956 *	* 1.3232 *	* 1.2333 *	* 1.2603 *	* 1.0078 *	* .5711 *
	* 3.4609 *	* 2.5058 *	* 2.1381 *	* 1.7771 *	* 1.9071 *	* 1.8746 *	* 2.3551 *	* 4.1788 *
9	* .9331 *	* 1.0425 *	* 1.2788 *	* 1.1671 *	* 1.3069 *	* 1.1314 *	* 1.1476 *	* .6730 *
	* 2.5058 *	* 2.2463 *	* 1.8378 *	* 2.0130 *	* 1.8021 *	* 2.0908 *	* 2.0770 *	* 3.5562 *
10	* 1.0956 *	* 1.2809 *	* 1.1661 *	* 1.3026 *	* 1.1184 *	* 1.0100 *	* 1.1205 *	* .6090 *
	* 2.1381 *	* 1.8349 *	* 2.0199 *	* 1.8132 *	* 2.1210 *	* 2.3613 *	* 2.1446 *	* 3.9431 *
11	* 1.3232 *	* 1.1682 *	* 1.3048 *	* 1.1368 *	* 1.2788 *	* 1.1476 *	* 1.0588 *	* .5386 *
	* 1.7771 *	* 2.0113 *	* 1.8104 *	* 2.0893 *	* 1.8869 *	* 2.1164 *	* 2.2917 *	* 4.5002 *
12	* 1.2333 *	* 1.3080 *	* 1.1173 *	* 1.2788 *	* 1.2300 *	* 1.2192 *	* .7282 *	
	* 1.9071 *	* 1.8021 *	* 2.1228 *	* 1.8869 *	* 1.9739 *	* 2.0082 *	* 3.3608 *	
13	* 1.2603 *	* 1.1314 *	* 1.0100 *	* 1.1476 *	* 1.2202 *	* 1.1021 *	* .5700 *	
	* 1.8746 *	* 2.0917 *	* 2.3601 *	* 2.1173 *	* 2.0090 *	* 2.2381 *	* 4.3407 *	
14	* 1.0078 *	* 1.1476 *	* 1.1205 *	* 1.0588 *	* .7282 *	* .5700 *		
	* 2.3551 *	* 2.0778 *	* 2.1436 *	* 2.2906 *	* 3.3608 *	* 4.3367 *		
15	* .5711 *	* .6741 *	* .6090 *	* .5386 *	F-SUB-Q			
	* 4.1788 *	* 3.5508 *	* 3.9461 *	* 4.4959 *	M-SUB-Q			

AT 50% POWER, 300 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .4714 *	* .4378 *	* .5115 *	* .5939 *	* .5484 *	* .5646 *	* .4595 *	* .2850 *
	* 4.8504 *	* 5.2242 *	* 4.4759 *	* 3.8579 *	* 4.1841 *	* 4.0866 *	* 5.0459 *	* 8.1851 *
9	* .4378 *	* .4996 *	* .5744 *	* .5332 *	* .5863 *	* .5180 *	* .4833 *	* .3089 *
	* 5.2242 *	* 4.5883 *	* 3.9876 *	* 4.3053 *	* 3.9152 *	* 4.4467 *	* 4.8058 *	* 7.5960 *
10	* .5115 *	* .5744 *	* .5278 *	* .5841 *	* .5180 *	* .4606 *	* .4703 *	* .3056 *
	* 4.4759 *	* 3.9873 *	* 4.3531 *	* 3.9315 *	* 4.4551 *	* 5.0414 *	* 4.9774 *	* 7.6943 *
11	* .5939 *	* .5343 *	* .5852 *	* .5245 *	* .5722 *	* .5050 *	* .4367 *	* .2655 *
	* 3.8579 *	* 4.2978 *	* 3.9282 *	* 4.4057 *	* 4.0982 *	* 4.6838 *	* 5.4146 *	* 8.9236 *
12	* .5484 *	* .5863 *	* .5180 *	* .5722 *	* .5418 *	* .5137 *	* .3695 *	
	* 4.1841 *	* 3.9119 *	* 4.4551 *	* 4.0982 *	* 4.3337 *	* 4.6293 *	* 6.4609 *	
13	* .5646 *	* .5180 *	* .4595 *	* .5050 *	* .5137 *	* .4606 *	* .2861 *	
	* 4.0866 *	* 4.4467 *	* 5.0414 *	* 4.6792 *	* 4.6293 *	* 5.2021 *	* 8.3906 *	
14	* .4595 *	* .4833 *	* .4703 *	* .4367 *	* .3695 *	* .2872 *		
	* 5.0459 *	* 4.8058 *	* 4.9822 *	* 5.4027 *	* 6.4609 *	* 8.3906 *		
15	* .2850 *	* .3089 *	* .3056 *	* .2655 *	F-SUB-Q			
	* 8.1851 *	* 7.5838 *	* 7.6703 *	* 8.8913 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 169 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OF MARGIN) - NORMAL OPERATION

AT 50% POWER, 470 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .5288 *	* .5657 *	* .6773 *	* .7770 *	* .7629 *	* .7337 *	* .5473 *	* .3403 *
	* 4.1878 *	* 3.9241 *	* 3.3948 *	* 2.9936 *	* 3.1706 *	* 3.0645 *	* 3.6204 *	* 5.3321 *
9	* .5657 *	* .5787 *	* .6806 *	* .7347 *	* .7781 *	* .7185 *	* .6405 *	* .4552 *
	* 3.9241 *	* 3.5150 *	* 3.1098 *	* 3.2441 *	* 3.0140 *	* 3.3110 *	* 3.4532 *	* 5.0094 *
10	* .6773 *	* .6806 *	* .5722 *	* .7120 *	* .7098 *	* .6751 *	* .6621 *	* .4617 *
	* 3.3948 *	* 3.1075 *	* 3.3301 *	* 3.0890 *	* 3.3848 *	* 3.5553 *	* 3.5026 *	* 5.1354 *
11	* .7770 *	* .7347 *	* .7120 *	* .6481 *	* .6816 *	* .6491 *	* .6210 *	* .4259 *
	* 2.9936 *	* 3.2441 *	* 3.0867 *	* 3.4583 *	* 3.3716 *	* 3.6229 *	* 3.6651 *	* 5.4916 *
12	* .7629 *	* .7781 *	* .7098 *	* .6816 *	* .5603 *	* .5559 *	* .5072 *	
	* 3.1706 *	* 3.0127 *	* 3.3838 *	* 3.3716 *	* 3.7817 *	* 3.9864 *	* 4.5241 *	
13	* .7337 *	* .7185 *	* .6751 *	* .6491 *	* .5559 *	* .5061 *	* .3858 *	
	* 3.0645 *	* 3.3110 *	* 3.5553 *	* 3.6204 *	* 3.9864 *	* 4.3124 *	* 5.8164 *	
14	* .5473 *	* .6405 *	* .6621 *	* .6210 *	* .5072 *	* .3858 *		
	* 3.6204 *	* 3.4532 *	* 3.5026 *	* 3.6651 *	* 4.5241 *	* 5.8164 *		
15	* .3403 *	* .4552 *	* .4617 *	* .4259 *	F-SUB-Q			
	* 5.3321 *	* 5.0094 *	* 5.1354 *	* 5.4916 *	M-SUB-Q			

AT 50% POWER, 470 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6416 *	* 1.0761 *	* 1.2972 *	* 1.4392 *	* 1.4500 *	* 1.3839 *	* .9916 *	* .5852 *
	* 3.4114 *	* 2.1494 *	* 1.8134 *	* 1.6590 *	* 1.7135 *	* 1.6690 *	* 1.9635 *	* 3.1653 *
9	* 1.0761 *	* 1.1021 *	* 1.2690 *	* 1.4164 *	* 1.4402 *	* 1.3795 *	* 1.2896 *	* .8540 *
	* 2.1494 *	* 1.9283 *	* 1.7279 *	* 1.7182 *	* 1.6733 *	* 1.7587 *	* 1.7728 *	* 2.6972 *
10	* 1.2972 *	* 1.2690 *	* 1.0273 *	* 1.3145 *	* 1.3752 *	* 1.3275 *	* 1.3579 *	* .8128 *
	* 1.8134 *	* 1.7265 *	* 1.7665 *	* 1.7124 *	* 1.8018 *	* 1.8870 *	* 1.7851 *	* 3.0534 *
11	* 1.4392 *	* 1.4164 *	* 1.3145 *	* 1.2506 *	* 1.2679 *	* 1.2614 *	* 1.2593 *	* .7445 *
	* 1.6590 *	* 1.7175 *	* 1.7110 *	* 1.8547 *	* 1.8924 *	* 1.9431 *	* 1.8971 *	* 3.2882 *
12	* 1.4500 *	* 1.4402 *	* 1.3741 *	* 1.2679 *	* 1.0328 *	* 1.1314 *	* .8670 *	
	* 1.7135 *	* 1.6726 *	* 1.8025 *	* 1.8924 *	* 2.0097 *	* 2.0469 *	* 2.7656 *	
13	* 1.3839 *	* 1.3795 *	* 1.3275 *	* 1.2614 *	* 1.1314 *	* 1.0349 *	* .6686 *	
	* 1.6690 *	* 1.7594 *	* 1.8870 *	* 1.9431 *	* 2.0469 *	* 2.1875 *	* 3.5077 *	
14	* .9916 *	* 1.2896 *	* 1.3579 *	* 1.2593 *	* .8670 *	* .6686 *		
	* 1.9635 *	* 1.7728 *	* 1.7851 *	* 1.8971 *	* 2.7656 *	* 3.5077 *		
15	* .5852 *	* .8540 *	* .8128 *	* .7445 *	F-SUB-Q			
	* 3.1653 *	* 2.6955 *	* 3.0541 *	* 3.2882 *	M-SUB-Q			

CNEI-0400-24
Appendix A, Rev. 18
Page 170 of 268

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

	H	G	F	E	D	C	B	A
8	* .7087 *	* 1.1932 *	* 1.4554 *	* 1.6732 *	* 1.6223 *	* 1.6104 *	* 1.1260 *	* .6632 *
	* 3.1520 *	* 1.9926 *	* 1.6610 *	* 1.4606 *	* 1.5698 *	* 1.4697 *	* 1.7909 *	* 2.8922 *
9	* 1.1932 *	* 1.2322 *	* 1.4673 *	* 1.5909 *	* 1.6743 *	* 1.5443 *	* 1.5031 *	* .9710 *
	* 1.9926 *	* 1.7741 *	* 1.5197 *	* 1.5691 *	* 1.4724 *	* 1.6102 *	* 1.5537 *	* 2.4247 *
10	* 1.4554 *	* 1.4684 *	* 1.1606 *	* 1.5345 *	* 1.5378 *	* 1.4771 *	* 1.5855 *	* .9222 *
	* 1.6610 *	* 1.5184 *	* 1.6145 *	* 1.5080 *	* 1.6517 *	* 1.7427 *	* 1.5702 *	* 2.7727 *
11	* 1.6732 *	* 1.5909 *	* 1.5345 *	* 1.4001 *	* 1.4630 *	* 1.4034 *	* 1.4641 *	* .8453 *
	* 1.4606 *	* 1.5685 *	* 1.5070 *	* 1.6968 *	* 1.6840 *	* 1.7918 *	* 1.6731 *	* 2.9837 *
12	* 1.6223 *	* 1.6743 *	* 1.5367 *	* 1.4630 *	* 1.1628 *	* 1.3091 *	* .9710 *	
	* 1.5698 *	* 1.4722 *	* 1.6523 *	* 1.6841 *	* 1.8514 *	* 1.7828 *	* 2.5408 *	
13	* 1.6104 *	* 1.5432 *	* 1.4771 *	* 1.4045 *	* 1.3091 *	* 1.2127 *	* .7488 *	
	* 1.4697 *	* 1.6104 *	* 1.7427 *	* 1.7917 *	* 1.7828 *	* 1.9048 *	* 3.2191 *	
14	* 1.1260 *	* 1.5031 *	* 1.5855 *	* 1.4652 *	* .9699 *	* .7488 *		
	* 1.7909 *	* 1.5534 *	* 1.5708 *	* 1.6731 *	* 2.5408 *	* 3.2191 *		
15	* .6632 *	* .9710 *	* .9211 *	* .8453 *	F-SUB-Q			
	* 2.8922 *	* 2.4220 *	* 2.7727 *	* 2.9837 *	M-SUB-Q			

	H	G	F	E	D	C	B	A
8	* .7261	* 1.2235	* 1.5096	* 1.7935	* 1.6862	* 1.7187	* 1.1801	* .6968
	* 3.0259	* 1.9926	* 1.6610	* 1.4087	* 1.5616	* 1.4212	* 1.7799	* 2.8814
9	* 1.2235	* 1.2766	* 1.5746	* 1.6516	* 1.7935	* 1.6006	* 1.6136	* 1.0198
	* 1.9926	* 1.7741	* 1.4688	* 1.5649	* 1.4182	* 1.6048	* 1.4957	* 2.3877
10	* 1.5096	* 1.5746	* 1.2105	* 1.6418	* 1.5876	* 1.5161	* 1.6906	* .9667
	* 1.6610	* 1.4673	* 1.6124	* 1.4572	* 1.6517	* 1.7427	* 1.5178	* 2.7325
11	* 1.7935	* 1.6516	* 1.6418	* 1.4478	* 1.5562	* 1.4457	* 1.5616	* .8854
	* 1.4087	* 1.5638	* 1.4560	* 1.6965	* 1.5983	* 1.7918	* 1.6094	* 2.9402
12	* 1.6862	* 1.7935	* 1.5865	* 1.5562	* 1.2083	* 1.3871	* 1.0035	*
	* 1.5616	* 1.4180	* 1.6523	* 1.5988	* 1.7352	* 1.6298	* 2.5329	*
13	* 1.7187	* 1.5995	* 1.5161	* 1.4457	* 1.3871	* 1.2939	* .7748	*
	* 1.4212	* 1.6054	* 1.7427	* 1.7917	* 1.6298	* 1.7435	* 3.2055	*
14	* 1.1801	* 1.6136	* 1.6906	* 1.5616	* 1.0035	* .7748	*	*
	* 1.7799	* 1.4954	* 1.5182	* 1.6094	* 2.5331	* 3.2032	*	*
15	* .6968	* 1.0198	* .9667	* .8854	* F-SUB-Q			
	* 2.8814	* 2.3844	* 2.7316	* 2.9398	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 171 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 470 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7109	* 1.2007	* 1.4879	* 1.7903	* 1.6613	* 1.7177	* 1.1780	* .7012
	* 3.2028	* 2.1777	* 1.7803	* 1.4795	* 1.6650	* 1.4936	* 1.8914	* 3.0628
9	* 1.2007	* 1.2647	* 1.5790	* 1.6255	* 1.7881	* 1.5746	* 1.6169	* 1.0165
	* 2.1777	* 1.9132	* 1.5439	* 1.6716	* 1.4899	* 1.7125	* 1.5663	* 2.5286
10	* 1.4879	* 1.5800	* 1.2051	* 1.6396	* 1.5540	* 1.4782	* 1.6830	* .9569
	* 1.7803	* 1.5425	* 1.7221	* 1.5315	* 1.7677	* 1.8854	* 1.5872	* 2.8867
11	* 1.7903	* 1.6266	* 1.6396	* 1.4186	* 1.5410	* 1.4066	* 1.5497	* .8724
	* 1.4795	* 1.6706	* 1.5302	* 1.8171	* 1.6341	* 1.8972	* 1.6867	* 3.1154
12	* 1.6613	* 1.7892	* 1.5529	* 1.5410	* 1.1823	* 1.3644	* .9775	*
	* 1.6650	* 1.4894	* 1.7684	* 1.6341	* 1.7856	* 1.6507	* 2.7076	*
13	* 1.7177	* 1.5735	* 1.4782	* 1.4066	* 1.3644	* 1.2755	* .7532	*
	* 1.4936	* 1.7131	* 1.8860	* 1.8972	* 1.6505	* 1.7598	* 3.3964	*
14	* 1.1780	* 1.6169	* 1.6830	* 1.5497	* .9775	* .7532	*	*
	* 1.8914	* 1.5663	* 1.5872	* 1.6867	* 2.7076	* 3.3945	*	*
15	* .7012	* 1.0176	* .9569	* .8724	* F-SUB-Q			
	* 3.0628	* 2.5258	* 2.8867	* 3.1154	* M-SUB-Q			

AT 50% POWER, 470 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6979	* 1.1801	* 1.4641	* 1.7621	* 1.6245	* 1.7025	* 1.2040	* .7282
	* 3.4927	* 2.3890	* 1.9430	* 1.5951	* 1.8068	* 1.6070	* 2.0431	* 3.3056
9	* 1.1801	* 1.2668	* 1.5768	* 1.5920	* 1.7578	* 1.5454	* 1.6115	* 1.0154
	* 2.3890	* 2.0943	* 1.6698	* 1.8190	* 1.6051	* 1.8583	* 1.6798	* 2.7241
10	* 1.4641	* 1.5779	* 1.2300	* 1.6245	* 1.5139	* 1.4327	* 1.6548	* .9396
	* 1.9430	* 1.6681	* 1.8777	* 1.6550	* 1.9243	* 2.0484	* 1.6904	* 3.0841
11	* 1.7621	* 1.5930	* 1.6245	* 1.3882	* 1.5042	* 1.3546	* 1.5085	* .8496
	* 1.5951	* 1.8177	* 1.6531	* 1.9795	* 1.7457	* 2.0405	* 1.8258	* 3.3836
12	* 1.6245	* 1.7578	* 1.5128	* 1.5031	* 1.1444	* 1.3156	* .9396	*
	* 1.8068	* 1.6047	* 1.9251	* 1.7457	* 1.9183	* 1.7547	* 2.9692	*
13	* 1.7025	* 1.5443	* 1.4327	* 1.3546	* 1.3156	* 1.2289	* .7217	*
	* 1.6070	* 1.8590	* 2.0478	* 2.0405	* 1.7547	* 1.8664	* 3.6370	*
14	* 1.2040	* 1.6115	* 1.6548	* 1.5085	* .9396	* .7217	*	*
	* 2.0431	* 1.6791	* 1.6904	* 1.8258	* 2.9708	* 3.6362	*	*
15	* .7282	* 1.0165	* .9396	* .8496	* F-SUB-Q			
	* 3.3056	* 2.7208	* 3.0841	* 3.3836	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 172 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 470 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6968	* 1.1834	* 1.4673	* 1.7578	* 1.6115	* 1.7198	* 1.2983	* .8052
	* 3.7554	* 2.5985	* 2.1018	* 1.7030	* 1.9337	* 1.7086	* 2.1857	* 3.5249
9	* 1.1834	* 1.3102	* 1.6082	* 1.5855	* 1.7502	* 1.5464	* 1.6375	* 1.0393
	* 2.5985	* 2.2791	* 1.7996	* 1.9554	* 1.7090	* 1.9849	* 1.7786	* 2.8843
10	* 1.4673	* 1.6093	* 1.3221	* 1.6440	* 1.4998	* 1.4110	* 1.6494	* .9385
	* 2.1018	* 1.7977	* 2.0377	* 1.7778	* 2.0640	* 2.1966	* 1.7924	* 3.2780
11	* 1.7578	* 1.5865	* 1.6451	* 1.4077	* 1.4879	* 1.3221	* 1.4847	* .8388
	* 1.7030	* 1.9541	* 1.7763	* 2.1305	* 1.8837	* 2.2110	* 1.9786	* 3.6688
12	* 1.6115	* 1.7513	* 1.4998	* 1.4879	* 1.1216	* 1.2820	* .9146	*
	* 1.9337	* 1.7083	* 2.0650	* 1.8837	* 2.0805	* 1.8865	* 3.2419	*
13	* 1.7198	* 1.5454	* 1.4110	* 1.3232	* 1.2820	* 1.1932	* .7001	*
	* 1.7086	* 1.9862	* 2.1966	* 2.2110	* 1.8865	* 2.0047	* 3.9248	*
14	* 1.2983	* 1.6375	* 1.6494	* 1.4847	* .9146	* .7001	*	*
	* 2.1857	* 1.7783	* 1.7921	* 1.9786	* 3.2419	* 3.9248	*	*
15	* .8052	* 1.0414	* .9385	* .8388	* F-SUB-Q			
	* 3.5249	* 2.8806	* 3.2780	* 3.6663	* M-SUB-Q			

AT 50% POWER, 470 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6925	* 1.1791	* 1.4597	* 1.7458	* 1.5898	* 1.7263	* 1.3752	* .8496
	* 4.1332	* 2.8399	* 2.2962	* 1.8594	* 2.1174	* 1.8604	* 2.3667	* 3.8133
9	* 1.1791	* 1.3351	* 1.6310	* 1.5692	* 1.7361	* 1.5367	* 1.6516	* 1.0501
	* 2.8399	* 2.4813	* 1.9541	* 2.1407	* 1.8676	* 2.1706	* 1.9267	* 3.1316
10	* 1.4597	* 1.6331	* 1.4782	* 1.6516	* 1.4782	* 1.3861	* 1.6407	* .9298
	* 2.2962	* 1.9519	* 2.2178	* 1.9367	* 2.2701	* 2.4147	* 1.9552	* 3.5765
11	* 1.7458	* 1.5703	* 1.6526	* 1.4175	* 1.4662	* 1.2853	* 1.4565	* .8204
	* 1.8594	* 2.1397	* 1.9350	* 2.3399	* 2.0619	* 2.4238	* 2.1784	* 4.0193
12	* 1.5898	* 1.7372	* 1.4771	* 1.4662	* 1.0956	* 1.2452	* .8854	*
	* 2.1174	* 1.8668	* 2.2712	* 2.0621	* 2.2864	* 2.0716	* 3.5508	*
13	* 1.7263	* 1.5367	* 1.3861	* 1.2853	* 1.2452	* 1.1563	* .6741	*
	* 1.8604	* 2.1717	* 2.4147	* 2.4228	* 2.0708	* 2.2079	* 4.3253	*
14	* 1.3752	* 1.6516	* 1.6407	* 1.4565	* .8854	* .6741	*	*
	* 2.3667	* 1.9262	* 1.9552	* 2.1784	* 3.5508	* 4.3253	*	*
15	* .8496	* 1.0512	* .9298	* .8214	* F-SUB-Q			
	* 3.8133	* 3.1273	* 3.5749	* 4.0193	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 173 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 470 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6925	* 1.1801	* 1.4576	* 1.7383	* 1.5779	* 1.7263	* 1.3958	* .8670
	* 4.4561	* 3.1313	* 2.5320	* 2.0647	* 2.3377	* 2.0635	* 2.5971	* 4.1730
9	* 1.1801	* 1.3470	* 1.6494	* 1.5605	* 1.7274	* 1.5302	* 1.6602	* 1.0555
	* 3.1313	* 2.7332	* 2.1659	* 2.3648	* 2.0756	* 2.3954	* 2.1271	* 3.4355
10	* 1.4576	* 1.6505	* 1.4988	* 1.6591	* 1.4641	* 1.3720	* 1.6342	* .9266
	* 2.5320	* 2.1638	* 2.4461	* 2.1516	* 2.5176	* 2.6454	* 2.1497	* 3.8905
11	* 1.7383	* 1.5605	* 1.6613	* 1.4153	* 1.4511	* 1.2614	* 1.4381	* .8106
	* 2.0647	* 2.3636	* 2.1495	* 2.5831	* 2.2751	* 2.6531	* 2.4143	* 4.4028
12	* 1.5779	* 1.7274	* 1.4630	* 1.4500	* 1.0772	* 1.2202	* .8670	
	* 2.3377	* 2.0751	* 2.5190	* 2.2763	* 2.5090	* 2.2799	* 3.8747	
13	* 1.7263	* 1.5291	* 1.3720	* 1.2614	* 1.2202	* 1.1303	* .6578	
	* 2.0635	* 2.3966	* 2.6454	* 2.6516	* 2.2799	* 2.4246	* 4.7165	
14	* 1.3958	* 1.6602	* 1.6342	* 1.4381	* .8659	* .6578		
	* 2.5971	* 2.1271	* 2.1497	* 2.4143	* 3.8747	* 4.7165		
15	* .8670	* 1.0577	* .9266	* .8106	* F-SUB-Q			
	* 4.1730	* 3.4303	* 3.8905	* 4.4028	* M-SUB-Q			

AT 50% POWER, 470 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6806	* 1.1596	* 1.4283	* 1.6949	* 1.5410	* 1.6852	* 1.3752	* .8561
	* 4.7907	* 3.3594	* 2.8579	* 2.3457	* 2.6226	* 2.3318	* 2.8998	* 4.6439
9	* 1.1596	* 1.3254	* 1.6180	* 1.5237	* 1.6830	* 1.4955	* 1.6266	* 1.0371
	* 3.3594	* 3.0259	* 2.4667	* 2.6622	* 2.3528	* 2.6782	* 2.3952	* 3.8049
10	* 1.4283	* 1.6190	* 1.4727	* 1.6245	* 1.4261	* 1.3373	* 1.5930	* .9081
	* 2.8579	* 2.4640	* 2.7395	* 2.4297	* 2.8025	* 2.9680	* 2.4254	* 4.3407
11	* 1.6949	* 1.5248	* 1.6255	* 1.3828	* 1.4077	* 1.2235	* 1.3947	* .7900
	* 2.3457	* 2.6607	* 2.4271	* 2.7657	* 2.4734	* 2.8561	* 2.7258	* 4.9501
12	* 1.5410	* 1.6830	* 1.4251	* 1.4077	* 1.0458	* 1.1791	* .8399	
	* 2.6226	* 2.3516	* 2.8042	* 2.4734	* 2.7202	* 2.4938	* 4.1660	
13	* 1.6852	* 1.4944	* 1.3373	* 1.2235	* 1.1791	* 1.0902	* .6361	
	* 2.3318	* 2.6798	* 2.9663	* 2.8561	* 2.4938	* 2.6634	* 5.1076	
14	* 1.3752	* 1.6277	* 1.5930	* 1.3947	* .8399	* .6361		
	* 2.8998	* 2.3952	* 2.4254	* 2.7258	* 4.1660	* 5.1076		
15	* .8561	* 1.0393	* .9081	* .7900	* F-SUB-Q			
	* 4.6439	* 3.8014	* 4.3407	* 4.9501	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 174 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 470 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6806	* 1.1552	* 1.4196	* 1.6938	* 1.5291	* 1.6841	* 1.3698	* .8529
	* 5.0237	* 3.5318	* 2.8903	* 2.3921	* 2.6762	* 2.4046	* 2.9942	* 4.8261
9	* 1.1552	* 1.3199	* 1.6201	* 1.5118	* 1.6797	* 1.4836	* 1.6321	* 1.0338
	* 3.5318	* 3.1205	* 2.5121	* 2.7120	* 2.4134	* 2.7635	* 2.4930	* 3.9983
10	* 1.4196	* 1.6223	* 1.4652	* 1.6245	* 1.4121	* 1.3243	* 1.5930	* .9049
	* 2.8903	* 2.5093	* 2.8135	* 2.5148	* 2.9284	* 3.1268	* 2.5738	* 4.5796
11	* 1.6938	* 1.5128	* 1.6255	* 1.3709	* 1.4034	* 1.2127	* 1.3926	* .7846
	* 2.3921	* 2.7105	* 2.5121	* 2.9284	* 2.6342	* 3.0312	* 2.8885	* 5.3341
12	* 1.5291	* 1.6808	* 1.4121	* 1.4034	* 1.0393	* 1.1758	* .8323	*
	* 2.6762	* 2.4134	* 2.9302	* 2.6342	* 2.8885	* 2.6508	* 4.4189	*
13	* 1.6841	* 1.4825	* 1.3243	* 1.2127	* 1.1758	* 1.0891	* .6296	*
	* 2.4046	* 2.7651	* 3.1268	* 3.0292	* 2.6508	* 2.8282	* 5.4083	*
14	* 1.3698	* 1.6321	* 1.5930	* 1.3926	* .8323	* .6307	*	*
	* 2.9942	* 2.4930	* 2.5738	* 2.8867	* 4.4189	* 5.4083	*	*
15	* .8529	* 1.0349	* .9049	* .7846	* F-SUB-Q			
	* 4.8261	* 3.9914	* 4.5751	* 5.3341	* M-SUB-Q			

AT 50% POWER, 470 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6784	* 1.1411	* 1.4001	* 1.6711	* 1.5053	* 1.6613	* 1.3514	* .8420
	* 5.3801	* 3.6424	* 2.9506	* 2.4582	* 2.7371	* 2.4726	* 3.0543	* 4.9228
9	* 1.1411	* 1.3037	* 1.6017	* 1.4879	* 1.6570	* 1.4608	* 1.6136	* 1.0198
	* 3.6424	* 3.1828	* 2.5776	* 2.7727	* 2.4831	* 2.8261	* 2.5592	* 4.0830
10	* 1.4001	* 1.6028	* 1.4446	* 1.6028	* 1.3893	* 1.3037	* 1.5735	* .8941
	* 2.9506	* 2.5761	* 2.8729	* 2.5847	* 3.0015	* 3.2045	* 2.6462	* 4.6727
11	* 1.6711	* 1.4890	* 1.6050	* 1.3503	* 1.3861	* 1.1953	* 1.3763	* .7738
	* 2.4582	* 2.7711	* 2.5818	* 3.1110	* 2.8339	* 3.2399	* 3.0764	* 5.4678
12	* 1.5053	* 1.6570	* 1.3882	* 1.3861	* 1.0349	* 1.1650	* .8214	*
	* 2.7371	* 2.4831	* 3.0035	* 2.8339	* 3.0926	* 2.8582	* 4.7245	*
13	* 1.6613	* 1.4597	* 1.3037	* 1.1953	* 1.1650	* 1.0815	* .6231	*
	* 2.4726	* 2.8279	* 3.2045	* 3.2399	* 2.8582	* 3.0523	* 5.7990	*
14	* 1.3514	* 1.6136	* 1.5735	* 1.3763	* .8214	* .6231	*	*
	* 3.0543	* 2.5578	* 2.6462	* 3.0764	* 4.7245	* 5.7990	*	*
15	* .8420	* 1.0219	* .8941	* .7738	* F-SUB-Q			
	* 4.9228	* 4.0759	* 4.6727	* 5.4615	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 175 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 470 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6730 *	* 1.1195 *	* 1.3698 *	* 1.6331 *	* 1.4717 *	* 1.6234 *	* 1.3232 *	* .8247 *
	* 5.7113 *	* 3.7830 *	* 3.0719 *	* 2.5745 *	* 2.8522 *	* 2.5886 *	* 3.1777 *	* 5.1153 *
9	* 1.1195 *	* 1.2777 *	* 1.5670 *	* 1.4554 *	* 1.6180 *	* 1.4283 *	* 1.5790 *	* .9992 *
	* 3.7830 *	* 3.3095 *	* 2.6969 *	* 2.8907 *	* 2.6015 *	* 2.9468 *	* 2.6754 *	* 4.2474 *
10	* 1.3698 *	* 1.5681 *	* 1.4142 *	* 1.5670 *	* 1.3579 *	* 1.2755 *	* 1.5410 *	* .8756 *
	* 3.0719 *	* 2.6938 *	* 2.9899 *	* 2.7062 *	* 3.1311 *	* 3.3424 *	* 2.7683 *	* 4.8667 *
11	* 1.6331 *	* 1.4565 *	* 1.5681 *	* 1.3210 *	* 1.3579 *	* 1.1726 *	* 1.3481 *	* .7586 *
	* 2.5745 *	* 2.8890 *	* 2.7031 *	* 3.2434 *	* 3.0480 *	* 3.4629 *	* 3.2212 *	* 5.6906 *
12	* 1.4717 *	* 1.6190 *	* 1.3568 *	* 1.3579 *	* 1.0252 *	* 1.1466 *	* .8074 *	
	* 2.8522 *	* 2.6001 *	* 3.1332 *	* 3.0480 *	* 3.3142 *	* 3.0699 *	* 5.0279 *	
13	* 1.6234 *	* 1.4272 *	* 1.2755 *	* 1.1726 *	* 1.1466 *	* 1.0674 *	* .6134 *	
	* 2.5886 *	* 2.9487 *	* 3.3400 *	* 3.4629 *	* 3.0699 *	* 3.2727 *	* 6.1679 *	
14	* 1.3232 *	* 1.5790 *	* 1.5410 *	* 1.3481 *	* .8074 *	* .6134 *		
	* 3.1777 *	* 2.6754 *	* 2.7683 *	* 3.2212 *	* 5.0279 *	* 6.1598 *		
15	* .8247 *	* 1.0013 *	* .8756 *	* .7586 *	* F-SUB-Q			
	* 5.1153 *	* 4.2397 *	* 4.8617 *	* 5.6906 *	* M-SUB-Q			

AT 50% POWER, 470 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6741 *	* 1.1195 *	* 1.3687 *	* 1.6353 *	* 1.4684 *	* 1.6255 *	* 1.3232 *	* .8258 *
	* 5.6226 *	* 3.8261 *	* 3.1187 *	* 2.6116 *	* 2.9032 *	* 2.6276 *	* 3.2256 *	* 5.1715 *
9	* 1.1195 *	* 1.2777 *	* 1.5714 *	* 1.4522 *	* 1.6212 *	* 1.4251 *	* 1.5865 *	* 1.0013 *
	* 3.8261 *	* 3.3519 *	* 2.7298 *	* 2.9413 *	* 2.6394 *	* 2.9994 *	* 2.7062 *	* 4.2900 *
10	* 1.3687 *	* 1.5724 *	* 1.4131 *	* 1.5714 *	* 1.3557 *	* 1.2744 *	* 1.5475 *	* .8789 *
	* 3.1187 *	* 2.7282 *	* 3.0382 *	* 2.7425 *	* 3.1863 *	* 3.3955 *	* 2.8013 *	* 4.9124 *
11	* 1.6353 *	* 1.4532 *	* 1.5724 *	* 1.3199 *	* 1.3633 *	* 1.1747 *	* 1.3579 *	* .7618 *
	* 2.6116 *	* 2.9395 *	* 2.7409 *	* 3.2979 *	* 3.0382 *	* 3.4427 *	* 3.2501 *	* 5.7392 *
12	* 1.4684 *	* 1.6212 *	* 1.3546 *	* 1.3633 *	* 1.0306 *	* 1.1574 *	* .8128 *	
	* 2.9032 *	* 2.6394 *	* 3.1884 *	* 3.0382 *	* 3.3049 *	* 3.0441 *	* 4.9538 *	
13	* 1.6255 *	* 1.4251 *	* 1.2744 *	* 1.1758 *	* 1.1574 *	* 1.0826 *	* .6199 *	
	* 2.6276 *	* 3.0013 *	* 3.3955 *	* 3.4427 *	* 3.0441 *	* 3.2367 *	* 6.0335 *	
14	* 1.3232 *	* 1.5865 *	* 1.5475 *	* 1.3579 *	* .8128 *	* .6210 *		
	* 3.2256 *	* 2.7047 *	* 2.8013 *	* 3.2501 *	* 4.9538 *	* 6.0335 *		
15	* .8258 *	* 1.0035 *	* .8789 *	* .7618 *	* F-SUB-Q			
	* 5.1715 *	* 4.2861 *	* 4.9124 *	* 5.7392 *	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 176 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 470 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6697	* 1.1130	* 1.3600	* 1.6299	* 1.4587	* 1.6190	* 1.3145	* .8214
	* 5.1065	* 3.6420	* 3.0460	* 2.5549	* 2.8505	* 2.5731	* 3.1648	* 5.0387
9	* 1.1130	* 1.2712	* 1.5681	* 1.4424	* 1.6147	* 1.4142	* 1.5833	* .9970
	* 3.6420	* 3.2613	* 2.6603	* 2.8819	* 2.5829	* 2.9450	* 2.6424	* 4.1795
10	* 1.3600	* 1.5692	* 1.4056	* 1.5670	* 1.3460	* 1.2679	* 1.5464	* .8756
	* 3.0460	* 2.6573	* 2.9654	* 2.6724	* 3.1048	* 3.3142	* 2.7313	* 4.7729
11	* 1.6299	* 1.4435	* 1.5692	* 1.3134	* 1.3644	* 1.1726	* 1.3611	* .7608
	* 2.5549	* 2.8801	* 2.6709	* 3.0612	* 2.7323	* 3.0913	* 2.9492	* 5.3986
12	* 1.4587	* 1.6158	* 1.3460	* 1.3633	* 1.0306	* 1.1650	* .8149	*
	* 2.8505	* 2.5815	* 3.1069	* 2.7323	* 2.9644	* 2.7152	* 4.4206	*
13	* 1.6190	* 1.4142	* 1.2679	* 1.1726	* 1.1650	* 1.0945	* .6242	*
	* 2.5731	* 2.9468	* 3.3142	* 3.0913	* 2.7152	* 2.8725	* 5.3382	*
14	* 1.3145	* 1.5844	* 1.5464	* 1.3611	* .8149	* .6242	*	*
	* 3.1648	* 2.6424	* 2.7313	* 2.9492	* 4.4247	* 5.3382	*	*
15	* .8214	* .9992	* .8756	* .7608	* F-SUB-Q			
	* 5.0387	* 4.1721	* 4.7681	* 5.4019	* M-SUB-Q			

AT 50% POWER, 470 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6708	* 1.1119	* 1.3557	* 1.6255	* 1.4522	* 1.6136	* 1.3091	* .8182
	* 4.4884	* 3.2010	* 2.7443	* 2.3099	* 2.5793	* 2.3317	* 2.8541	* 4.5225
9	* 1.1119	* 1.2679	* 1.5659	* 1.4359	* 1.6115	* 1.4088	* 1.5811	* .9948
	* 3.2010	* 2.8967	* 2.3908	* 2.6028	* 2.3311	* 2.6602	* 2.3803	* 3.7361
10	* 1.3557	* 1.5681	* 1.4023	* 1.5670	* 1.3438	* 1.2658	* 1.5475	* .8745
	* 2.7443	* 2.3884	* 2.6565	* 2.3766	* 2.7350	* 2.9275	* 2.4289	* 4.2517
11	* 1.6255	* 1.4370	* 1.5681	* 1.3134	* 1.3709	* 1.1780	* 1.3676	* .7618
	* 2.3099	* 2.6013	* 2.3742	* 2.7017	* 2.4094	* 2.7340	* 2.6026	* 4.7657
12	* 1.4522	* 1.6115	* 1.3427	* 1.3698	* 1.0382	* 1.1791	* .8225	*
	* 2.5793	* 2.3299	* 2.7366	* 2.4113	* 2.6231	* 2.3973	* 3.9126	*
13	* 1.6136	* 1.4077	* 1.2658	* 1.1791	* 1.1791	* 1.1140	* .6340	*
	* 2.3317	* 2.6617	* 2.9246	* 2.7316	* 2.3976	* 2.5346	* 4.7272	*
14	* 1.3091	* 1.5811	* 1.5475	* 1.3676	* .8225	* .6350	*	*
	* 2.8541	* 2.3791	* 2.4289	* 2.6026	* 3.9126	* 4.7232	*	*
15	* .8182	* .9970	* .8745	* .7618	* F-SUB-Q			
	* 4.5225	* 3.7302	* 4.2517	* 4.7683	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 177 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 470 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6784 *	* 1.1195 *	* 1.3590 *	* 1.6234 *	* 1.4522 *	* 1.6104 *	* 1.3102 *	* .8193 *
	* 3.9603 *	* 2.8185 *	* 2.3876 *	* 2.0158 *	* 2.2465 *	* 2.0365 *	* 2.4912 *	* 3.9560 *
9	* 1.1195 *	* 1.2744 *	* 1.5681 *	* 1.4381 *	* 1.6093 *	* 1.4088 *	* 1.5779 *	* .9970 *
	* 2.8185 *	* 2.5403 *	* 2.0813 *	* 2.2663 *	* 2.0349 *	* 2.3193 *	* 2.0820 *	* 3.2603 *
10	* 1.3590 *	* 1.5692 *	* 1.4066 *	* 1.5703 *	* 1.3503 *	* 1.2712 *	* 1.5508 *	* .8767 *
	* 2.3876 *	* 2.0794 *	* 2.3136 *	* 2.0826 *	* 2.4074 *	* 2.5691 *	* 2.1225 *	* 3.7088 *
11	* 1.6234 *	* 1.4392 *	* 1.5714 *	* 1.3254 *	* 1.3882 *	* 1.1986 *	* 1.3785 *	* .7683 *
	* 2.0158 *	* 2.2652 *	* 2.0808 *	* 2.3826 *	* 2.1450 *	* 2.4272 *	* 2.3072 *	* 4.2019 *
12	* 1.4522 *	* 1.6104 *	* 1.3492 *	* 1.3882 *	* 1.0620 *	* 1.2105 *	* .8420 *	
	* 2.2465 *	* 2.0334 *	* 2.4086 *	* 2.1450 *	* 2.3303 *	* 2.1363 *	* 3.4726 *	
13	* 1.6104 *	* 1.4077 *	* 1.2712 *	* 1.1986 *	* 1.2105 *	* 1.1509 *	* .6546 *	
	* 2.0365 *	* 2.3196 *	* 2.5686 *	* 2.4272 *	* 2.1363 *	* 2.2608 *	* 4.2124 *	
14	* 1.3102 *	* 1.5790 *	* 1.5508 *	* 1.3785 *	* .8420 *	* .6546 *		
	* 2.4912 *	* 2.0810 *	* 2.1225 *	* 2.3072 *	* 3.4726 *	* 4.2066 *		
15	* .8193 *	* .9992 *	* .8778 *	* .7683 *	* F-SUB-Q			
	* 3.9560 *	* 3.2558 *	* 3.7110 *	* 4.1957 *	* M-SUB-Q			

AT 50% POWER, 470 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7196 *	* 1.1552 *	* 1.3915 *	* 1.6700 *	* 1.4836 *	* 1.6537 *	* 1.3362 *	* .8355 *
	* 3.4650 *	* 2.4447 *	* 2.0733 *	* 1.7411 *	* 1.9547 *	* 1.7634 *	* 2.1755 *	* 3.4568 *
9	* 1.1552 *	* 1.3102 *	* 1.6180 *	* 1.4706 *	* 1.6559 *	* 1.4392 *	* 1.6245 *	* 1.0208 *
	* 2.4447 *	* 2.1988 *	* 1.7928 *	* 1.9696 *	* 1.7578 *	* 2.0193 *	* 1.7986 *	* 2.8400 *
10	* 1.3915 *	* 1.6190 *	* 1.4435 *	* 1.6223 *	* 1.3882 *	* 1.3069 *	* 1.6017 *	* .9016 *
	* 2.0733 *	* 1.7914 *	* 2.0042 *	* 1.7906 *	* 2.0896 *	* 2.2253 *	* 1.8279 *	* 3.2113 *
11	* 1.6700 *	* 1.4717 *	* 1.6245 *	* 1.3730 *	* 1.4662 *	* 1.2582 *	* 1.4402 *	* .7922 *
	* 1.7411 *	* 1.9694 *	* 1.7892 *	* 2.0742 *	* 1.8653 *	* 2.1245 *	* 1.9950 *	* 3.6519 *
12	* 1.4836 *	* 1.6570 *	* 1.3871 *	* 1.4652 *	* 1.1541 *	* 1.3178 *	* .8897 *	
	* 1.9547 *	* 1.7567 *	* 2.0899 *	* 1.8653 *	* 2.0326 *	* 1.8569 *	* 3.0476 *	
13	* 1.6537 *	* 1.4381 *	* 1.3069 *	* 1.2593 *	* 1.3178 *	* 1.2593 *	* .7012 *	
	* 1.7634 *	* 2.0195 *	* 2.2253 *	* 2.1245 *	* 1.8574 *	* 1.9658 *	* 3.6857 *	
14	* 1.3362 *	* 1.6255 *	* 1.6028 *	* 1.4402 *	* .8886 *	* .7022 *		
	* 2.1755 *	* 1.7991 *	* 1.8279 *	* 1.9950 *	* 3.0476 *	* 3.6857 *		
15	* .8355 *	* 1.0219 *	* .9016 *	* .7933 *	* F-SUB-Q			
	* 3.4568 *	* 2.8349 *	* 3.2129 *	* 3.6519 *	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 178 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 470 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8052	* 1.1986	* 1.4240	* 1.7068	* 1.5139	* 1.6884	* 1.3622	* .8507
	* 3.0591	* 2.1771	* 1.8388	* 1.5446	* 1.7377	* 1.5675	* 1.9385	* 3.0876
9	* 1.1986	* 1.3470	* 1.6591	* 1.5020	* 1.6938	* 1.4684	* 1.6624	* 1.0414
	* 2.1771	* 1.9404	* 1.5864	* 1.7494	* 1.5586	* 1.7963	* 1.5993	* 2.5330
10	* 1.4240	* 1.6602	* 1.4803	* 1.6678	* 1.4283	* 1.3416	* 1.6451	* .9244
	* 1.8388	* 1.5843	* 1.7733	* 1.5809	* 1.8431	* 1.9686	* 1.6173	* 2.8529
11	* 1.7068	* 1.5031	* 1.6689	* 1.4261	* 1.5519	* 1.3297	* 1.4955	* .8160
	* 1.5446	* 1.7487	* 1.5798	* 1.8398	* 1.6443	* 1.8763	* 1.7701	* 3.2301
12	* 1.5139	* 1.6938	* 1.4272	* 1.5519	* 1.3275	* 1.4727	* .9439	*
	* 1.7377	* 1.5581	* 1.8445	* 1.6439	* 1.7956	* 1.6443	* 2.6904	*
13	* 1.6884	* 1.4673	* 1.3416	* 1.3297	* 1.4727	* 1.3915	* .7553	*
	* 1.5675	* 1.7970	* 1.9686	* 1.8750	* 1.6443	* 1.7440	* 3.2771	*
14	* 1.3622	* 1.6624	* 1.6451	* 1.4955	* .9428	* .7553	*	*
	* 1.9385	* 1.5997	* 1.6173	* 1.7690	* 2.6919	* 3.2732	*	*
15	* .8507	* 1.0436	* .9244	* .8160	* F-SUB-Q			
	* 3.0876	* 2.5289	* 2.8529	* 3.2301	* M-SUB-Q			

AT 50% POWER, 470 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8594	* 1.2333	* 1.4446	* 1.7209	* 1.5334	* 1.7014	* 1.3763	* .8583
	* 2.8154	* 1.9561	* 1.6761	* 1.4162	* 1.5873	* 1.4380	* 1.7754	* 2.8384
9	* 1.2333	* 1.3730	* 1.6754	* 1.5226	* 1.7090	* 1.4879	* 1.6732	* 1.0523
	* 1.9561	* 1.7609	* 1.4509	* 1.5964	* 1.4281	* 1.6397	* 1.4697	* 2.3254
10	* 1.4446	* 1.6776	* 1.5053	* 1.6895	* 1.4587	* 1.3665	* 1.6635	* .9363
	* 1.6761	* 1.4492	* 1.6135	* 1.4423	* 1.6702	* 1.7897	* 1.4795	* 2.6122
11	* 1.7209	* 1.5237	* 1.6917	* 1.4662	* 1.6158	* 1.4121	* 1.5248	* .8301
	* 1.4162	* 1.5959	* 1.4406	* 1.6637	* 1.5008	* 1.7075	* 1.6165	* 2.9483
12	* 1.5334	* 1.7090	* 1.4576	* 1.6147	* 1.4587	* 1.5941	* .9873	*
	* 1.5873	* 1.4276	* 1.6719	* 1.5008	* 1.6284	* 1.4979	* 2.4565	*
13	* 1.7014	* 1.4868	* 1.3665	* 1.4121	* 1.5941	* 1.4933	* .7987	*
	* 1.4380	* 1.6403	* 1.7897	* 1.7068	* 1.4979	* 1.5899	* 2.9869	*
14	* 1.3763	* 1.6732	* 1.6635	* 1.5248	* .9873	* .7987	*	*
	* 1.7754	* 1.4697	* 1.4795	* 1.6165	* 2.4565	* 2.9869	*	*
15	* .8583	* 1.0544	* .9363	* .8301	* F-SUB-Q			
	* 2.8384	* 2.3220	* 2.6122	* 2.9483	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 179 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 470 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8930	* 1.2690	* 1.4760	* 1.7556	* 1.5670	* 1.7361	* 1.4045	* .8724
	* 2.5314	* 1.7865	* 1.5451	* 1.3065	* 1.4625	* 1.3264	* 1.6410	* 2.6395
9	* 1.2690	* 1.4066	* 1.7090	* 1.5551	* 1.7437	* 1.5226	* 1.7068	* 1.0696
	* 1.7865	* 1.6178	* 1.3384	* 1.4712	* 1.3166	* 1.5095	* 1.3576	* 2.1609
10	* 1.4760	* 1.7112	* 1.5410	* 1.7285	* 1.4977	* 1.4023	* 1.7036	* .9558
	* 1.5451	* 1.3373	* 1.4837	* 1.3271	* 1.5318	* 1.6441	* 1.3614	* 2.4151
11	* 1.7556	* 1.5562	* 1.7307	* 1.5118	* 1.6862	* 1.4858	* 1.5692	* .8485
	* 1.3065	* 1.4702	* 1.3260	* 1.5182	* 1.3766	* 1.5624	* 1.4804	* 2.7259
12	* 1.5670	* 1.7448	* 1.4966	* 1.6862	* 1.5519	* 1.6873	* 1.0295	*
	* 1.4625	* 1.3162	* 1.5323	* 1.3770	* 1.4990	* 1.3822	* 2.2538	*
13	* 1.7361	* 1.5215	* 1.4023	* 1.4858	* 1.6873	* 1.5844	* .8388	*
	* 1.3264	* 1.5105	* 1.6445	* 1.5628	* 1.3822	* 1.4681	* 2.7650	*
14	* 1.4045	* 1.7068	* 1.7036	* 1.5692	* 1.0295	* .8388	*	*
	* 1.6410	* 1.3576	* 1.3614	* 1.4804	* 2.2538	* 2.7633	*	*
15	* .8724	* 1.0707	* .9558	* .8485	* F-SUB-Q			
	* 2.6395	* 2.1580	* 2.4151	* 2.7259	* M-SUB-Q			

AT 50% POWER, 470 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8735	* 1.2398	* 1.4348	* 1.6873	* 1.5313	* 1.6754	* 1.3698	* .8442
	* 2.4789	* 1.7512	* 1.5202	* 1.2990	* 1.4314	* 1.3145	* 1.6115	* 2.6187
9	* 1.2398	* 1.3698	* 1.6407	* 1.5139	* 1.6776	* 1.4868	* 1.6353	* 1.0284
	* 1.7512	* 1.5897	* 1.3331	* 1.4453	* 1.3094	* 1.4794	* 1.3569	* 2.1554
10	* 1.4348	* 1.6429	* 1.5009	* 1.6613	* 1.4630	* 1.3687	* 1.6407	* .9233
	* 1.5202	* 1.3313	* 1.4569	* 1.3191	* 1.5002	* 1.6133	* 1.3540	* 2.4014
11	* 1.6873	* 1.5150	* 1.6635	* 1.4782	* 1.6451	* 1.4717	* 1.5107	* .8193
	* 1.2990	* 1.4441	* 1.3180	* 1.4849	* 1.3458	* 1.5063	* 1.4722	* 2.7108
12	* 1.5313	* 1.6776	* 1.4619	* 1.6451	* 1.5410	* 1.6494	* 1.0133	*
	* 1.4314	* 1.3084	* 1.5011	* 1.3455	* 1.4380	* 1.3521	* 2.1932	*
13	* 1.6754	* 1.4858	* 1.3687	* 1.4717	* 1.6494	* 1.5497	* .8258	*
	* 1.3145	* 1.4799	* 1.6133	* 1.5058	* 1.3521	* 1.4427	* 2.6998	*
14	* 1.3698	* 1.6353	* 1.6407	* 1.5118	* 1.0133	* .8269	*	*
	* 1.6115	* 1.3569	* 1.3540	* 1.4722	* 2.1950	* 2.6998	*	*
15	* .8442	* 1.0306	* .9233	* .8193	* F-SUB-Q			
	* 2.6187	* 2.1524	* 2.4014	* 2.7108	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 180 of 268

TABLE 4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 470 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7781	* 1.0447	* 1.2040	* 1.4749	* 1.3438	* 1.4576	* 1.1997	* .7402
	* 2.6994	* 2.0177	* 1.7532	* 1.4366	* 1.5770	* 1.4622	* 1.7832	* 2.9019
9	* 1.0447	* 1.1574	* 1.4337	* 1.2723	* 1.4673	* 1.2809	* 1.4142	* .8713
	* 2.0177	* 1.8224	* 1.4757	* 1.6630	* 1.4460	* 1.6632	* 1.5206	* 2.4720
10	* 1.2040	* 1.4348	* 1.2679	* 1.4522	* 1.2300	* 1.1444	* 1.3936	* .7965
	* 1.7532	* 1.4735	* 1.6684	* 1.4598	* 1.7259	* 1.8648	* 1.5437	* 2.7065
11	* 1.4749	* 1.2733	* 1.4532	* 1.2419	* 1.4478	* 1.3015	* 1.3048	* .7120
	* 1.4366	* 1.6618	* 1.4581	* 1.7092	* 1.4769	* 1.6481	* 1.6529	* 3.0300
12	* 1.3438	* 1.4684	* 1.2289	* 1.4478	* 1.3611	* 1.4435	* .8951	*
	* 1.5770	* 1.4456	* 1.7260	* 1.4769	* 1.5731	* 1.4938	* 2.4074	*
13	* 1.4576	* 1.2798	* 1.1444	* 1.3026	* 1.4435	* 1.3275	* .7282	*
	* 1.4622	* 1.6643	* 1.8648	* 1.6481	* 1.4938	* 1.6295	* 2.9715	*
14	* 1.1997	* 1.4142	* 1.3936	* 1.3048	* .8951	* .7282	*	*
	* 1.7832	* 1.5198	* 1.5437	* 1.6529	* 2.4074	* 2.9715	*	*
15	* .7402	* .8724	* .7965	* .7120	* F-SUB-Q			
	* 2.9019	* 2.4694	* 2.7037	* 3.0300	* M-SUB-Q			

AT 50% POWER, 470 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .5863	* .5462	* .6242	* .7120	* .6730	* .7022	* .6058	* .4064
	* 3.5054	* 3.7583	* 3.2965	* 2.8920	* 3.0615	* 2.9459	* 3.4325	* 5.1639
9	* .5462	* .6112	* .6903	* .6502	* .7087	* .6491	* .6405	* .4411
	* 3.7583	* 3.3649	* 2.9757	* 3.1714	* 2.9094	* 3.1897	* 3.2549	* 4.7552
10	* .6242	* .6914	* .6426	* .7012	* .6340	* .5819	* .6296	* .4378
	* 3.2965	* 2.9705	* 3.2033	* 2.9380	* 3.2571	* 3.5598	* 3.3198	* 4.8063
11	* .7120	* .6502	* .7012	* .6372	* .6990	* .6437	* .5906	* .3847
	* 2.8920	* 3.1693	* 2.9362	* 3.2419	* 2.9696	* 3.2430	* 3.5491	* 5.4623
12	* .6730	* .7087	* .6340	* .6990	* .6730	* .6567	* .4996	*
	* 3.0615	* 2.9076	* 3.2571	* 2.9696	* 3.0865	* 3.1837	* 4.2035	*
13	* .7022	* .6491	* .5819	* .6437	* .6567	* .6047	* .4031	*
	* 2.9459	* 3.1897	* 3.5645	* 3.2430	* 3.1837	* 3.4723	* 5.2415	*
14	* .6058	* .6405	* .6296	* .5906	* .4996	* .4031	*	*
	* 3.4325	* 3.2549	* 3.3198	* 3.5491	* 4.2035	* 5.2312	*	*
15	* .4064	* .4411	* .4378	* .3847	* F-SUB-Q			
	* 5.1639	* 4.7552	* 4.7977	* 5.4623	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 181 of 268

TABLE 5

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .5917 *	* .4866 *	* .4822 *	* .4909 *	* .4617 *	* .4682 *	* .4172 *	* .2807 *
	* 2.6315 *	* 3.3922 *	* 3.5787 *	* 3.3302 *	* 3.5877 *	* 3.3863 *	* 3.8866 *	* 5.7073 *
9	* .4866 *	* .4931 *	* .5115 *	* .4714 *	* .4801 *	* .4541 *	* .4205 *	* .2948 *
	* 3.3922 *	* 3.4009 *	* 3.2870 *	* 3.5961 *	* 3.3512 *	* 3.6114 *	* 3.7710 *	* 5.4628 *
10	* .4822 *	* .5126 *	* .4812 *	* .4790 *	* .4562 *	* .4367 *	* .4151 *	* .2893 *
	* 3.5787 *	* 3.2819 *	* 3.5995 *	* 3.4499 *	* 3.7040 *	* 3.8659 *	* 3.8964 *	* 5.6192 *
11	* .4909 *	* .4714 *	* .4790 *	* .4487 *	* .4552 *	* .4302 *	* .3804 *	* .2514 *
	* 3.3302 *	* 3.5936 *	* 3.4443 *	* 3.8049 *	* 3.5504 *	* 3.8587 *	* 4.3510 *	* 6.6846 *
12	* .4617 *	* .4801 *	* .4562 *	* .4552 *	* .3999 *	* .3815 *	* .3316 *	
	* 3.5877 *	* 3.3512 *	* 3.7040 *	* 3.5504 *	* 3.7744 *	* 3.8925 *	* 4.9598 *	
13	* .4682 *	* .4541 *	* .4367 *	* .4302 *	* .3815 *	* .3327 *	* .2471 *	
	* 3.3863 *	* 3.6114 *	* 3.8659 *	* 3.8587 *	* 3.8925 *	* 4.3869 *	* 6.4814 *	
14	* .4172 *	* .4205 *	* .4151 *	* .3804 *	* .3316 *	* .2471 *		
	* 3.8866 *	* 3.7710 *	* 3.8964 *	* 4.3510 *	* 4.9598 *	* 6.4814 *		
15	* .2807 *	* .2948 *	* .2893 *	* .2514 *	F-SUB-Q			
	* 5.7073 *	* 5.4569 *	* 5.6111 *	* 6.6846 *	M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8247 *	* 1.1227 *	* 1.0750 *	* .8561 *	* .9461 *	* .8355 *	* .8518 *	* .5332 *
	* 1.8963 *	* 1.5157 *	* 1.6453 *	* 1.9842 *	* 1.8002 *	* 1.9641 *	* 1.9593 *	* 3.0951 *
9	* 1.1227 *	* 1.1281 *	* .9385 *	* .9786 *	* .8637 *	* .9916 *	* .8789 *	* .6188 *
	* 1.5157 *	* 1.5318 *	* 1.8227 *	* 1.7796 *	* 1.9407 *	* 1.7302 *	* 1.8655 *	* 2.6776 *
10	* 1.0750 *	* .9385 *	* .9873 *	* .8344 *	* 1.0013 *	* 1.0024 *	* .8648 *	* .5267 *
	* 1.6453 *	* 1.8243 *	* 1.7941 *	* 2.0386 *	* 1.7525 *	* 1.7406 *	* 1.9257 *	* 3.1972 *
11	* .8561 *	* .9786 *	* .8355 *	* .9287 *	* .8464 *	* .9558 *	* .8279 *	* .4703 *
	* 1.9842 *	* 1.7788 *	* 2.0367 *	* 1.8759 *	* 1.9921 *	* 1.8117 *	* 2.0500 *	* 3.6825 *
12	* .9461 *	* .8637 *	* 1.0013 *	* .8464 *	* .8475 *	* .8290 *	* .6134 *	
	* 1.8002 *	* 1.9407 *	* 1.7539 *	* 1.9921 *	* 1.8128 *	* 1.9241 *	* 2.7748 *	
13	* .8355 *	* .9916 *	* 1.0024 *	* .9558 *	* .8301 *	* .7488 *	* .4660 *	
	* 1.9641 *	* 1.7310 *	* 1.7406 *	* 1.8117 *	* 1.9241 *	* 2.0951 *	* 3.5662 *	
14	* .8518 *	* .8789 *	* .8648 *	* .8279 *	* .6134 *	* .4660 *		
	* 1.9593 *	* 1.8655 *	* 1.9257 *	* 2.0500 *	* 2.7735 *	* 3.5625 *		
15	* .5332 *	* .6188 *	* .5278 *	* .4703 *	F-SUB-Q			
	* 3.0951 *	* 2.6743 *	* 3.1972 *	* 3.6825 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 182 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0935	* 1.4099	* 1.3232	* 1.0599	* 1.1487	* 1.0404	* 1.0501	* .6481
	* 1.6160	* 1.2617	* 1.3687	* 1.6391	* 1.5176	* 1.6112	* 1.6248	* 2.6049
9	* 1.4099	* 1.4034	* 1.1747	* 1.1942	* 1.0848	* 1.2257	* 1.1108	* .7673
	* 1.2617	* 1.2754	* 1.4924	* 1.4924	* 1.5807	* 1.4325	* 1.5084	* 2.2074
10	* 1.3232	* 1.1736	* 1.2051	* 1.0317	* 1.2408	* 1.2495	* 1.1010	* .6470
	* 1.3687	* 1.4941	* 1.5045	* 1.6871	* 1.4486	* 1.4288	* 1.5446	* 2.6649
11	* 1.0599	* 1.1953	* 1.0338	* 1.1401	* 1.0750	* 1.1975	* 1.0642	* .5787
	* 1.6391	* 1.4914	* 1.6845	* 1.5607	* 1.6087	* 1.4858	* 1.6299	* 3.0683
12	* 1.1487	* 1.0837	* 1.2408	* 1.0750	* 1.1487	* 1.0848	* .7564	*
	* 1.5176	* 1.5812	* 1.4486	* 1.6083	* 1.4997	* 1.5482	* 2.3176	*
13	* 1.0404	* 1.2246	* 1.2495	* 1.1986	* 1.0848	* .9927	* .5765	*
	* 1.6112	* 1.4331	* 1.4288	* 1.4852	* 1.5482	* 1.6658	* 2.9768	*
14	* 1.0501	* 1.1108	* 1.1010	* 1.0642	* .7564	* .5765	*	*
	* 1.6248	* 1.5084	* 1.5446	* 1.6299	* 2.3176	* 2.9753	*	*
15	* .6481	* .7683	* .6470	* .5787	* F-SUB-Q			
	* 2.6049	* 2.2039	* 2.6631	* 3.0683	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2181	* 1.5876	* 1.4955	* 1.2289	* 1.3145	* 1.2137	* 1.2040	* .7304
	* 1.5036	* 1.1578	* 1.2435	* 1.4430	* 1.3553	* 1.4093	* 1.4484	* 2.3658
9	* 1.5876	* 1.5790	* 1.3525	* 1.3611	* 1.2614	* 1.3980	* 1.3026	* .8756
	* 1.1578	* 1.1681	* 1.3280	* 1.3380	* 1.3869	* 1.2837	* 1.3125	* 1.9779
10	* 1.4955	* 1.3514	* 1.3730	* 1.1975	* 1.4164	* 1.4261	* 1.2939	* .7391
	* 1.2435	* 1.3296	* 1.3498	* 1.4810	* 1.2983	* 1.2792	* 1.3408	* 2.3927
11	* 1.2289	* 1.3622	* 1.2007	* 1.3102	* 1.2614	* 1.3871	* 1.2582	* .6632
	* 1.4430	* 1.3368	* 1.4800	* 1.3929	* 1.4065	* 1.3182	* 1.4111	* 2.7376
12	* 1.3145	* 1.2603	* 1.4153	* 1.2614	* 1.3503	* 1.2929	* .8724	*
	* 1.3553	* 1.3873	* 1.2991	* 1.4065	* 1.3245	* 1.3414	* 2.0698	*
13	* 1.2137	* 1.3969	* 1.4261	* 1.3871	* 1.2939	* 1.1997	* .6665	*
	* 1.4093	* 1.2845	* 1.2792	* 1.3182	* 1.3408	* 1.4271	* 2.6596	*
14	* 1.2040	* 1.3026	* 1.2939	* 1.2582	* .8724	* .6665	*	*
	* 1.4484	* 1.3125	* 1.3408	* 1.4108	* 2.0698	* 2.6596	*	*
15	* .7304	* .8778	* .7391	* .6632	* F-SUB-Q			
	* 2.3658	* 1.9744	* 2.3927	* 2.7376	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 183 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2679	* 1.6613	* 1.5768	* 1.3210	* 1.4077	* 1.3134	* 1.2907	* .7727 *
	* 1.4912	* 1.1402	* 1.2136	* 1.3675	* 1.2977	* 1.3332	* 1.3861	* 2.2948 *
9	* 1.6613	* 1.6548	* 1.4424	* 1.4511	* 1.3600	* 1.4901	* 1.4121	* .9309 *
	* 1.1402	* 1.1486	* 1.2797	* 1.2868	* 1.3152	* 1.2333	* 1.2386	* 1.9078 *
10	* 1.5768	* 1.4402	* 1.4619	* 1.2907	* 1.5096	* 1.5248	* 1.4045	* .7878 *
	* 1.2136	* 1.2817	* 1.2991	* 1.4041	* 1.2471	* 1.2289	* 1.2630	* 2.3008 *
11	* 1.3210	* 1.4522	* 1.2950	* 1.4066	* 1.3676	* 1.4944	* 1.3709	* .7087 *
	* 1.3675	* 1.2853	* 1.4032	* 1.3359	* 1.3322	* 1.2588	* 1.3292	* 2.6231 *
12	* 1.4077	* 1.3600	* 1.5085	* 1.3676	* 1.4662	* 1.4164	* .9374	*
	* 1.2977	* 1.3152	* 1.2485	* 1.3319	* 1.2601	* 1.2605	* 1.9868	*
13	* 1.3134	* 1.4890	* 1.5248	* 1.4944	* 1.4164	* 1.3232	* .7163	*
	* 1.3332	* 1.2344	* 1.2289	* 1.2584	* 1.2605	* 1.3348	* 2.5570	*
14	* 1.2907	* 1.4121	* 1.4045	* 1.3709	* .9374	* .7174	*	
	* 1.3861	* 1.2386	* 1.2630	* 1.3289	* 1.9861	* 2.5570	*	
15	* .7727	* .9331	* .7878	* .7098	* F-SUB-Q			
	* 2.2948	* 1.9045	* 2.3008	* 2.6231	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2972	* 1.7025	* 1.6245	* 1.3763	* 1.4695	* 1.3774	* 1.3470	* .7998 *
	* 1.4990	* 1.1457	* 1.2088	* 1.3402	* 1.2779	* 1.3049	* 1.3650	* 2.2801 *
9	* 1.7025	* 1.6971	* 1.4933	* 1.5063	* 1.4251	* 1.5529	* 1.4836	* .9656 *
	* 1.1457	* 1.1517	* 1.2667	* 1.2720	* 1.2874	* 1.2162	* 1.2102	* 1.8926 *
10	* 1.6245	* 1.4923	* 1.5161	* 1.3514	* 1.5735	* 1.5920	* 1.4760	* .8193 *
	* 1.2088	* 1.2681	* 1.2844	* 1.3752	* 1.2295	* 1.2109	* 1.2320	* 2.2732 *
11	* 1.3763	* 1.5085	* 1.3525	* 1.4717	* 1.4381	* 1.5670	* 1.4446	* .7391 *
	* 1.3402	* 1.2706	* 1.3743	* 1.3140	* 1.2984	* 1.2325	* 1.2899	* 2.5833 *
12	* 1.4695	* 1.4240	* 1.5724	* 1.4381	* 1.5432	* 1.4988	* .9807	*
	* 1.2779	* 1.2874	* 1.2309	* 1.2984	* 1.2350	* 1.2274	* 1.9560	*
13	* 1.3774	* 1.5508	* 1.5920	* 1.5681	* 1.4988	* 1.4045	* .7499	*
	* 1.3049	* 1.2175	* 1.2109	* 1.2318	* 1.2274	* 1.2989	* 2.5284	*
14	* 1.3470	* 1.4836	* 1.4760	* 1.4457	* .9807	* .7499	*	
	* 1.3650	* 1.2102	* 1.2320	* 1.2899	* 1.9543	* 2.5257	*	
15	* .7998	* .9677	* .8193	* .7391	* F-SUB-Q			
	* 2.2801	* 1.8886	* 2.2732	* 2.5820	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 184 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3319	* 1.7513	* 1.6787	* 1.4305	* 1.5334	* 1.4392	* 1.4077	* .8312
	* 1.5048	* 1.1447	* 1.1951	* 1.3240	* 1.2648	* 1.2871	* 1.3506	* 2.2683
9	* 1.7513	* 1.7469	* 1.5443	* 1.5659	* 1.4879	* 1.6190	* 1.5529	* 1.0035
	* 1.1447	* 1.1483	* 1.2500	* 1.2613	* 1.2675	* 1.2021	* 1.1910	* 1.8828
10	* 1.6787	* 1.5432	* 1.5735	* 1.4099	* 1.6429	* 1.6635	* 1.5454	* .8529
	* 1.1951	* 1.2515	* 1.2726	* 1.3549	* 1.2093	* 1.1917	* 1.2095	* 2.2526
11	* 1.4305	* 1.5670	* 1.4099	* 1.5378	* 1.5063	* 1.6429	* 1.5172	* .7705
	* 1.3240	* 1.2599	* 1.3546	* 1.2960	* 1.2680	* 1.2064	* 1.2523	* 2.5471
12	* 1.5334	* 1.4879	* 1.6418	* 1.5063	* 1.6201	* 1.5768	* 1.0263	*
	* 1.2648	* 1.2675	* 1.2104	* 1.2680	* 1.2117	* 1.1997	* 1.9278	*
13	* 1.4392	* 1.6180	* 1.6646	* 1.6440	* 1.5768	* 1.4814	* .7846	*
	* 1.2871	* 1.2034	* 1.1913	* 1.2058	* 1.1997	* 1.2668	* 2.4931	*
14	* 1.4077	* 1.5529	* 1.5454	* 1.5183	* 1.0273	* .7846	*	*
	* 1.3506	* 1.1910	* 1.2095	* 1.2516	* 1.9262	* 2.4931	*	*
15	* .8312	* 1.0057	* .8529	* .7705	* F-SUB-Q			
	* 2.2683	* 1.8788	* 2.2513	* 2.5471	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3405	* 1.7708	* 1.7014	* 1.4630	* 1.5681	* 1.4803	* 1.4392	* .8431
	* 1.5331	* 1.1617	* 1.2136	* 1.3406	* 1.2816	* 1.3020	* 1.3696	* 2.3205
9	* 1.7708	* 1.7664	* 1.5746	* 1.5952	* 1.5302	* 1.6559	* 1.5995	* 1.0208
	* 1.1617	* 1.1660	* 1.2661	* 1.2795	* 1.2776	* 1.2158	* 1.2010	* 1.9193
10	* 1.7014	* 1.5724	* 1.6028	* 1.4489	* 1.6819	* 1.7047	* 1.5941	* .8691
	* 1.2136	* 1.2675	* 1.2848	* 1.3643	* 1.2154	* 1.1966	* 1.2166	* 2.2845
11	* 1.4630	* 1.5974	* 1.4478	* 1.5746	* 1.5529	* 1.6895	* 1.5681	* .7857
	* 1.3406	* 1.2780	* 1.3635	* 1.2966	* 1.2670	* 1.2038	* 1.2505	* 2.5667
12	* 1.5681	* 1.5291	* 1.6808	* 1.5529	* 1.6689	* 1.6310	* 1.0523	*
	* 1.2816	* 1.2784	* 1.2165	* 1.2670	* 1.2101	* 1.1968	* 1.9256	*
13	* 1.4803	* 1.6548	* 1.7057	* 1.6906	* 1.6310	* 1.5356	* .8041	*
	* 1.3020	* 1.2171	* 1.1960	* 1.2034	* 1.1966	* 1.2655	* 2.5059	*
14	* 1.4392	* 1.5995	* 1.5941	* 1.5681	* 1.0534	* .8041	*	*
	* 1.3696	* 1.2010	* 1.2160	* 1.2498	* 1.9250	* 2.5049	*	*
15	* .8431	* 1.0230	* .8702	* .7857	* F-SUB-Q			
	* 2.3205	* 1.9152	* 2.2845	* 2.5645	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 185 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3611	* 1.8000	* 1.7328	* 1.4955	* 1.6071	* 1.5193	* 1.4760	* .8605
	* 1.5793	* 1.1904	* 1.2346	* 1.3749	* 1.3031	* 1.3332	* 1.3934	* 2.3737
9	* 1.8000	* 1.7957	* 1.6050	* 1.6299	* 1.5714	* 1.6992	* 1.6451	* 1.0414
	* 1.1904	* 1.1938	* 1.2995	* 1.3009	* 1.3028	* 1.2315	* 1.2263	* 1.9613
10	* 1.7328	* 1.6028	* 1.6353	* 1.4868	* 1.7263	* 1.7523	* 1.6396	* .8886
	* 1.2346	* 1.3010	* 1.3026	* 1.3906	* 1.2271	* 1.2058	* 1.2376	* 2.3218
11	* 1.4955	* 1.6321	* 1.4858	* 1.6158	* 1.5985	* 1.7404	* 1.6158	* .8030
	* 1.3749	* 1.2994	* 1.3904	* 1.3132	* 1.2895	* 1.2139	* 1.2682	* 2.5950
12	* 1.6071	* 1.5703	* 1.7253	* 1.5985	* 1.7198	* 1.6830	* 1.0815	*
	* 1.3031	* 1.3031	* 1.2284	* 1.2895	* 1.2221	* 1.2145	* 1.9458	*
13	* 1.5193	* 1.6971	* 1.7523	* 1.7415	* 1.6841	* 1.5865	* .8247	*
	* 1.3332	* 1.2328	* 1.2054	* 1.2135	* 1.2143	* 1.2814	* 2.5332	*
14	* 1.4760	* 1.6451	* 1.6407	* 1.6169	* 1.0815	* .8258	*	*
	* 1.3934	* 1.2263	* 1.2372	* 1.2680	* 1.9458	* 2.5321	*	*
15	* .8605	* 1.0436	* .8897	* .8030	* F-SUB-Q			
	* 2.3737	* 1.9570	* 2.3208	* 2.5950	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3600	* 1.7979	* 1.7328	* 1.4955	* 1.6158	* 1.5258	* 1.4858	* .8626
	* 1.6566	* 1.2443	* 1.2870	* 1.4503	* 1.3596	* 1.4052	* 1.4542	* 2.4837
9	* 1.7979	* 1.7946	* 1.6028	* 1.6331	* 1.5790	* 1.7101	* 1.6548	* 1.0425
	* 1.2443	* 1.2456	* 1.3680	* 1.3584	* 1.3661	* 1.2791	* 1.2879	* 2.0530
10	* 1.7328	* 1.6006	* 1.6386	* 1.4923	* 1.7393	* 1.7664	* 1.6505	* .8908
	* 1.2870	* 1.3697	* 1.3585	* 1.4599	* 1.2678	* 1.2444	* 1.2955	* 2.4185
11	* 1.4955	* 1.6353	* 1.4912	* 1.6266	* 1.6104	* 1.7578	* 1.6277	* .8052
	* 1.4503	* 1.3568	* 1.4602	* 1.3655	* 1.3451	* 1.2532	* 1.3197	* 2.6960
12	* 1.6158	* 1.5790	* 1.7383	* 1.6104	* 1.7361	* 1.6982	* 1.0891	*
	* 1.3596	* 1.3669	* 1.2690	* 1.3451	* 1.2724	* 1.2729	* 2.0226	*
13	* 1.5258	* 1.7079	* 1.7675	* 1.7588	* 1.6992	* 1.5995	* .8290	*
	* 1.4052	* 1.2809	* 1.2438	* 1.2525	* 1.2727	* 1.3442	* 2.6410	*
14	* 1.4858	* 1.6548	* 1.6505	* 1.6288	* 1.0891	* .8290	*	*
	* 1.4542	* 1.2879	* 1.2955	* 1.3189	* 2.0226	* 2.6410	*	*
15	* .8626	* 1.0447	* .8919	* .8063	* F-SUB-Q			
	* 2.4837	* 2.0494	* 2.4174	* 2.6929	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 186 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3741	* 1.8260	* 1.7610	* 1.5280	* 1.6516	* 1.5659	* 1.5161	* .8745
	* 1.7052	* 1.2780	* 1.3229	* 1.5050	* 1.4042	* 1.4563	* 1.5035	* 2.5788
9	* 1.8260	* 1.8228	* 1.6353	* 1.6646	* 1.6212	* 1.7491	* 1.7036	* 1.0599
	* 1.2780	* 1.2794	* 1.4098	* 1.3992	* 1.4115	* 1.3181	* 1.3297	* 2.1260
10	* 1.7610	* 1.6342	* 1.6689	* 1.5302	* 1.7805	* 1.8109	* 1.7003	* .9081
	* 1.3229	* 1.4106	* 1.3966	* 1.5072	* 1.3024	* 1.2757	* 1.3344	* 2.4930
11	* 1.5280	* 1.6667	* 1.5291	* 1.6635	* 1.6581	* 1.8065	* 1.6797	* .8193
	* 1.5050	* 1.3966	* 1.5074	* 1.4009	* 1.3832	* 1.2789	* 1.3541	* 2.7780
12	* 1.6516	* 1.6212	* 1.7784	* 1.6581	* 1.7859	* 1.7534	* 1.1151	*
	* 1.4042	* 1.4119	* 1.3034	* 1.3832	* 1.2977	* 1.3031	* 2.0672	*
13	* 1.5659	* 1.7469	* 1.8119	* 1.8076	* 1.7534	* 1.6537	* .8475	*
	* 1.4563	* 1.3196	* 1.2755	* 1.2783	* 1.3031	* 1.3780	* 2.7039	*
14	* 1.5161	* 1.7036	* 1.7003	* 1.6808	* 1.1151	* .8475	*	*
	* 1.5035	* 1.3297	* 1.3339	* 1.3535	* 2.0672	* 2.7031	*	*
15	* .8745	* 1.0620	* .9081	* .8204	* F-SUB-Q			
	* 2.5788	* 2.1202	* 2.4930	* 2.7772	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3741	* 1.8325	* 1.7675	* 1.5389	* 1.6656	* 1.5811	* 1.5291	* .8778
	* 1.7286	* 1.2938	* 1.3373	* 1.5232	* 1.4122	* 1.4807	* 1.5321	* 2.6595
9	* 1.8325	* 1.8293	* 1.6440	* 1.6732	* 1.6386	* 1.7664	* 1.7242	* 1.0631
	* 1.2938	* 1.2953	* 1.4335	* 1.4088	* 1.4326	* 1.3320	* 1.3593	* 2.1984
10	* 1.7675	* 1.6418	* 1.6776	* 1.5443	* 1.7989	* 1.8325	* 1.7220	* .9125
	* 1.3373	* 1.4352	* 1.4080	* 1.5272	* 1.3141	* 1.2896	* 1.3624	* 2.5720
11	* 1.5389	* 1.6765	* 1.5432	* 1.6787	* 1.6787	* 1.8325	* 1.7036	* .8247
	* 1.5232	* 1.4071	* 1.5282	* 1.4156	* 1.4059	* 1.2931	* 1.3826	* 2.8571
12	* 1.6656	* 1.6375	* 1.7979	* 1.6787	* 1.8119	* 1.7816	* 1.1260	*
	* 1.4122	* 1.4335	* 1.3156	* 1.4059	* 1.3171	* 1.3329	* 2.1094	*
13	* 1.5811	* 1.7643	* 1.8336	* 1.8336	* 1.7816	* 1.6787	* .8550	*
	* 1.4807	* 1.3343	* 1.2896	* 1.2931	* 1.3321	* 1.4170	* 2.7859	*
14	* 1.5291	* 1.7242	* 1.7220	* 1.7047	* 1.1260	* .8550	*	*
	* 1.5321	* 1.3593	* 1.3616	* 1.3826	* 2.1094	* 2.7859	*	*
15	* .8778	* 1.0664	* .9136	* .8247	* F-SUB-Q			
	* 2.6595	* 2.1922	* 2.5692	* 2.8537	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 187 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3665	* 1.8206	* 1.7567	* 1.5313	* 1.6602	* 1.5757	* 1.5258	* .8735
	* 1.7521	* 1.3131	* 1.3562	* 1.5460	* 1.4261	* 1.4997	* 1.5450	* 2.6892
9	* 1.8206	* 1.8174	* 1.6321	* 1.6646	* 1.6342	* 1.7653	* 1.7209	* 1.0577
	* 1.3131	* 1.3138	* 1.4597	* 1.4261	* 1.4507	* 1.3423	* 1.3753	* 2.2220
10	* 1.7567	* 1.6310	* 1.6678	* 1.5389	* 1.7979	* 1.8358	* 1.7198	* .9081
	* 1.3562	* 1.4615	* 1.4261	* 1.5501	* 1.3257	* 1.2986	* 1.3777	* 2.5943
11	* 1.5313	* 1.6667	* 1.5378	* 1.6743	* 1.6787	* 1.8380	* 1.7036	* .8204
	* 1.5460	* 1.4244	* 1.5511	* 1.4304	* 1.4235	* 1.3015	* 1.3990	* 2.8836
12	* 1.6602	* 1.6342	* 1.7968	* 1.6787	* 1.8152	* 1.7838	* 1.1249	*
	* 1.4261	* 1.4516	* 1.3264	* 1.4235	* 1.3272	* 1.3485	* 2.1295	*
13	* 1.5757	* 1.7621	* 1.8358	* 1.8380	* 1.7849	* 1.6797	* .8518	*
	* 1.4997	* 1.3446	* 1.2979	* 1.3007	* 1.3477	* 1.4348	* 2.8180	*
14	* 1.5258	* 1.7220	* 1.7198	* 1.7047	* 1.1249	* .8529	*	*
	* 1.5450	* 1.3744	* 1.3777	* 1.3981	* 2.1275	* 2.8147	*	*
15	* .8735	* 1.0599	* .9092	* .8214	* F-SUB-Q			
	* 2.6892	* 2.2157	* 2.5943	* 2.8801	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3774	* 1.8434	* 1.7784	* 1.5551	* 1.6862	* 1.6028	* 1.5497	* .8843
	* 1.7443	* 1.2979	* 1.3370	* 1.5112	* 1.3944	* 1.4643	* 1.5073	* 2.6185
9	* 1.8434	* 1.8412	* 1.6548	* 1.6873	* 1.6635	* 1.7946	* 1.7556	* 1.0718
	* 1.2979	* 1.2993	* 1.4365	* 1.3990	* 1.4192	* 1.3146	* 1.3415	* 2.1644
10	* 1.7784	* 1.6526	* 1.6895	* 1.5638	* 1.8304	* 1.8715	* 1.7556	* .9222
	* 1.3370	* 1.4383	* 1.4006	* 1.5201	* 1.3007	* 1.2733	* 1.3438	* 2.5258
11	* 1.5551	* 1.6895	* 1.5627	* 1.7025	* 1.7122	* 1.8770	* 1.7415	* .8323
	* 1.5112	* 1.3969	* 1.5205	* 1.4073	* 1.3948	* 1.2761	* 1.3665	* 2.8126
12	* 1.6862	* 1.6624	* 1.8293	* 1.7122	* 1.8542	* 1.8239	* 1.1455	*
	* 1.3944	* 1.4201	* 1.3015	* 1.3948	* 1.3044	* 1.3219	* 2.0860	*
13	* 1.6028	* 1.7924	* 1.8715	* 1.8770	* 1.8239	* 1.7187	* .8670	*
	* 1.4643	* 1.3168	* 1.2726	* 1.2754	* 1.3219	* 1.4065	* 2.7618	*
14	* 1.5497	* 1.7556	* 1.7556	* 1.7415	* 1.1455	* .8670	*	*
	* 1.5073	* 1.3408	* 1.3438	* 1.3657	* 2.0842	* 2.7586	*	*
15	* .8843	* 1.0750	* .9222	* .8334	* F-SUB-Q			
	* 2.6185	* 2.1584	* 2.5258	* 2.8110	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 188 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3676	* 1.8369	* 1.7729	* 1.5573	* 1.6862	* 1.6071	* 1.5497	* .8800
	* 1.7032	* 1.2617	* 1.2989	* 1.4634	* 1.3519	* 1.4158	* 1.4611	* 2.5510
9	* 1.8369	* 1.8347	* 1.6537	* 1.6830	* 1.6700	* 1.7968	* 1.7643	* 1.0696
	* 1.2617	* 1.2634	* 1.3920	* 1.3585	* 1.3709	* 1.2736	* 1.2939	* 2.1055
10	* 1.7729	* 1.6526	* 1.6862	* 1.5681	* 1.8336	* 1.8770	* 1.7653	* .9201
	* 1.2989	* 1.3936	* 1.3597	* 1.4685	* 1.2594	* 1.2314	* 1.2957	* 2.4551
11	* 1.5573	* 1.6862	* 1.5670	* 1.7025	* 1.7209	* 1.8856	* 1.7534	* .8301
	* 1.4634	* 1.3562	* 1.4699	* 1.3638	* 1.3455	* 1.2324	* 1.3158	* 2.7318
12	* 1.6862	* 1.6689	* 1.8315	* 1.7209	* 1.8629	* 1.8369	* 1.1466	*
	* 1.3519	* 1.3717	* 1.2607	* 1.3455	* 1.2650	* 1.2749	* 2.0164	*
13	* 1.6071	* 1.7946	* 1.8770	* 1.8856	* 1.8380	* 1.7328	* .8670	*
	* 1.4158	* 1.2754	* 1.2307	* 1.2317	* 1.2749	* 1.3549	* 2.6701	*
14	* 1.5497	* 1.7643	* 1.7653	* 1.7545	* 1.1476	* .8680	*	*
	* 1.4611	* 1.2939	* 1.2957	* 1.3150	* 2.0156	* 2.6687	*	*
15	* .8800	* 1.0718	* .9201	* .8301	* F-SUB-Q			
	* 2.5510	* 2.0998	* 2.4526	* 2.7304	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3535	* 1.8206	* 1.7567	* 1.5454	* 1.6732	* 1.5974	* 1.5389	* .8702
	* 1.6695	* 1.2354	* 1.2728	* 1.4331	* 1.3241	* 1.3854	* 1.4315	* 2.5094
9	* 1.8206	* 1.8184	* 1.6407	* 1.6689	* 1.6602	* 1.7849	* 1.7556	* 1.0588
	* 1.2354	* 1.2370	* 1.3629	* 1.3320	* 1.3397	* 1.2456	* 1.2633	* 2.0685
10	* 1.7567	* 1.6396	* 1.6711	* 1.5584	* 1.8239	* 1.8683	* 1.7578	* .9114
	* 1.2728	* 1.3641	* 1.3327	* 1.4359	* 1.2297	* 1.2011	* 1.2647	* 2.4104
11	* 1.5454	* 1.6711	* 1.5573	* 1.6917	* 1.7144	* 1.8791	* 1.7480	* .8214
	* 1.4331	* 1.3297	* 1.4372	* 1.3329	* 1.3114	* 1.2002	* 1.2816	* 2.6829
12	* 1.6732	* 1.6591	* 1.8217	* 1.7144	* 1.8564	* 1.8325	* 1.1390	*
	* 1.3241	* 1.3404	* 1.2309	* 1.3117	* 1.2321	* 1.2405	* 1.9700	*
13	* 1.5974	* 1.7827	* 1.8694	* 1.8791	* 1.8336	* 1.7285	* .8605	*
	* 1.3854	* 1.2476	* 1.2005	* 1.1996	* 1.2398	* 1.3181	* 2.6116	*
14	* 1.5389	* 1.7567	* 1.7578	* 1.7480	* 1.1401	* .8605	*	*
	* 1.4315	* 1.2633	* 1.2640	* 1.2809	* 1.9700	* 2.6101	*	*
15	* .8702	* 1.0609	* .9114	* .8225	* F-SUB-Q			
	* 2.5094	* 2.0631	* 2.4079	* 2.6798	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 189 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3340	* 1.7924	* 1.7285	* 1.5161	* 1.6461	* 1.5681	* 1.5150	* .8550
	* 1.6476	* 1.2205	* 1.2588	* 1.4238	* 1.3116	* 1.3754	* 1.4174	* 2.4901
9	* 1.7924	* 1.7903	* 1.6104	* 1.6396	* 1.6321	* 1.7599	* 1.7263	* 1.0382
	* 1.2205	* 1.2218	* 1.3516	* 1.3200	* 1.3276	* 1.2308	* 1.2522	* 2.0553
10	* 1.7285	* 1.6082	* 1.6429	* 1.5302	* 1.7979	* 1.8434	* 1.7285	* .8941
	* 1.2588	* 1.3531	* 1.3204	* 1.4234	* 1.2137	* 1.1841	* 1.2522	* 2.3901
11	* 1.5161	* 1.6429	* 1.5291	* 1.6656	* 1.6873	* 1.8542	* 1.7198	* .8063
	* 1.4238	* 1.3178	* 1.4247	* 1.3161	* 1.2965	* 1.1826	* 1.2675	* 2.6611
12	* 1.6461	* 1.6310	* 1.7957	* 1.6873	* 1.8315	* 1.8054	* 1.1216	*
	* 1.3116	* 1.3288	* 1.2150	* 1.2965	* 1.2136	* 1.2233	* 1.9463	*
13	* 1.5681	* 1.7567	* 1.8445	* 1.8553	* 1.8054	* 1.7003	* .8453	*
	* 1.3754	* 1.2328	* 1.1835	* 1.1820	* 1.2227	* 1.3010	* 2.5838	*
14	* 1.5150	* 1.7263	* 1.7285	* 1.7209	* 1.1227	* .8453	*	*
	* 1.4174	* 1.2515	* 1.2522	* 1.2668	* 1.9447	* 2.5822	*	*
15	* .8550	* 1.0414	* .8951	* .8074	* F-SUB-Q			
	* 2.4901	* 2.0499	* 2.3901	* 2.6597	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3199	* 1.7816	* 1.7166	* 1.5118	* 1.6364	* 1.5649	* 1.5031	* .8442
	* 1.5978	* 1.1821	* 1.2222	* 1.3836	* 1.2777	* 1.3377	* 1.3888	* 2.4628
9	* 1.7816	* 1.7794	* 1.6060	* 1.6288	* 1.6288	* 1.7491	* 1.7253	* 1.0284
	* 1.1821	* 1.1821	* 1.3059	* 1.2845	* 1.2877	* 1.1994	* 1.2151	* 2.0226
10	* 1.7166	* 1.6050	* 1.6321	* 1.5258	* 1.7892	* 1.8369	* 1.7285	* .8854
	* 1.2222	* 1.3075	* 1.2830	* 1.3773	* 1.1778	* 1.1481	* 1.2137	* 2.3525
11	* 1.5118	* 1.6321	* 1.5248	* 1.6559	* 1.6862	* 1.8510	* 1.7220	* .7976
	* 1.3836	* 1.2824	* 1.3791	* 1.2749	* 1.2513	* 1.1422	* 1.2236	* 2.6147
12	* 1.6364	* 1.6277	* 1.7870	* 1.6862	* 1.8282	* 1.8076	* 1.1151	*
	* 1.2777	* 1.2893	* 1.1789	* 1.2513	* 1.1646	* 1.1741	* 1.8879	*
13	* 1.5649	* 1.7469	* 1.8369	* 1.8510	* 1.8076	* 1.7036	* .8388	*
	* 1.3377	* 1.2012	* 1.1475	* 1.1416	* 1.1742	* 1.2470	* 2.5114	*
14	* 1.5031	* 1.7253	* 1.7285	* 1.7220	* 1.1151	* .8399	*	*
	* 1.3888	* 1.2151	* 1.2137	* 1.2229	* 1.8882	* 2.5082	*	*
15	* .8442	* 1.0306	* .8865	* .7987	* F-SUB-Q			
	* 2.4628	* 2.0174	* 2.3503	* 2.6147	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 190 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2896	* 1.7426	* 1.6776	* 1.4738	* 1.5963	* 1.5258	* 1.4641	* .8193
	* 1.5713	* 1.1637	* 1.2078	* 1.3729	* 1.2677	* 1.3275	* 1.3807	* 2.4573
9	* 1.7426	* 1.7404	* 1.5692	* 1.5887	* 1.5909	* 1.7079	* 1.6841	* .9981
	* 1.1637	* 1.1650	* 1.2912	* 1.2738	* 1.2762	* 1.1880	* 1.2054	* 2.0201
10	* 1.6776	* 1.5681	* 1.5920	* 1.4879	* 1.7480	* 1.7946	* 1.6873	* .8605
	* 1.2078	* 1.2928	* 1.2716	* 1.3653	* 1.1643	* 1.1348	* 1.2027	* 2.3451
11	* 1.4738	* 1.5920	* 1.4868	* 1.6147	* 1.6472	* 1.8098	* 1.6808	* .7738
	* 1.3729	* 1.2717	* 1.3670	* 1.2617	* 1.2371	* 1.1280	* 1.2113	* 2.6123
12	* 1.5963	* 1.5898	* 1.7458	* 1.6472	* 1.7870	* 1.7664	* 1.0870	*
	* 1.2677	* 1.2769	* 1.1662	* 1.2371	* 1.1455	* 1.1588	* 1.8719	*
13	* 1.5258	* 1.7057	* 1.7957	* 1.8098	* 1.7664	* 1.6624	* .8160	*
	* 1.3275	* 1.1898	* 1.1342	* 1.1275	* 1.1581	* 1.2312	* 2.4922	*
14	* 1.4641	* 1.6841	* 1.6873	* 1.6819	* 1.0870	* .8160	*	*
	* 1.3807	* 1.2046	* 1.2027	* 1.2106	* 1.8719	* 2.4922	*	*
15	* .8193	* 1.0013	* .8605	* .7748	* F-SUB-Q			
	* 2.4573	* 2.0149	* 2.3451	* 2.6088	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2365	* 1.6678	* 1.6006	* 1.3958	* 1.5183	* 1.4435	* 1.3893	* .7770
	* 1.5891	* 1.1794	* 1.2285	* 1.4104	* 1.2958	* 1.3649	* 1.4160	* 2.5259
9	* 1.6678	* 1.6656	* 1.4901	* 1.5118	* 1.5063	* 1.6266	* 1.5898	* .9428
	* 1.1794	* 1.1812	* 1.3205	* 1.3006	* 1.3092	* 1.2124	* 1.2404	* 2.0819
10	* 1.6006	* 1.4890	* 1.5150	* 1.4088	* 1.6646	* 1.7090	* 1.5930	* .8128
	* 1.2285	* 1.3212	* 1.2983	* 1.4017	* 1.1866	* 1.1571	* 1.2391	* 2.4169
11	* 1.3958	* 1.5150	* 1.4077	* 1.5356	* 1.5605	* 1.7209	* 1.5865	* .7304
	* 1.4104	* 1.2985	* 1.4035	* 1.2875	* 1.2680	* 1.1505	* 1.2469	* 2.6924
12	* 1.5183	* 1.5063	* 1.6635	* 1.5605	* 1.6971	* 1.6700	* 1.0295	*
	* 1.2958	* 1.3099	* 1.1885	* 1.2680	* 1.1683	* 1.1883	* 1.9183	*
13	* 1.4435	* 1.6245	* 1.7101	* 1.7220	* 1.6711	* 1.5659	* .7716	*
	* 1.3649	* 1.2143	* 1.1564	* 1.1506	* 1.1876	* 1.2676	* 2.5633	*
14	* 1.3893	* 1.5909	* 1.5930	* 1.5876	* 1.0306	* .7716	*	*
	* 1.4160	* 1.2404	* 1.2383	* 1.2462	* 1.9183	* 2.5599	*	*
15	* .7770	* .9450	* .8139	* .7304	* F-SUB-Q			
	* 2.5259	* 2.0761	* 2.4169	* 2.6930	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 191 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1823	* 1.5941	* 1.5280	* 1.3275	* 1.4500	* 1.3687	* 1.3167	* .7347
	* 1.6224	* 1.2040	* 1.2559	* 1.4490	* 1.3258	* 1.4069	* 1.4605	* 2.6134
9	* 1.5941	* 1.5909	* 1.4175	* 1.4435	* 1.4294	* 1.5486	* 1.4998	* .8876
	* 1.2040	* 1.2058	* 1.3556	* 1.3308	* 1.3492	* 1.2437	* 1.2855	* 2.1651
10	* 1.5280	* 1.4164	* 1.4467	* 1.3362	* 1.5855	* 1.6255	* 1.5020	* .7651
	* 1.2559	* 1.3573	* 1.3284	* 1.4435	* 1.2167	* 1.1880	* 1.2848	* 2.5134
11	* 1.3275	* 1.4457	* 1.3351	* 1.4619	* 1.4793	* 1.6364	* 1.4955	* .6860
	* 1.4490	* 1.3285	* 1.4443	* 1.3202	* 1.3071	* 1.1805	* 1.2918	* 2.8067
12	* 1.4500	* 1.4283	* 1.5844	* 1.4793	* 1.6169	* 1.5811	* .9764	*
	* 1.3258	* 1.3500	* 1.2179	* 1.3071	* 1.1964	* 1.2250	* 1.9783	*
13	* 1.3687	* 1.5464	* 1.6255	* 1.6375	* 1.5811	* 1.4760	* .7293	*
	* 1.4069	* 1.2458	* 1.1873	* 1.1806	* 1.2243	* 1.3128	* 2.6481	*
14	* 1.3167	* 1.4998	* 1.5020	* 1.4955	* .9764	* .7304	*	*
	* 1.4605	* 1.2855	* 1.2840	* 1.2918	* 1.9766	* 2.6445	*	*
15	* .7347	* .8908	* .7662	* .6860	* F-SUB-Q			
	* 2.6134	* 2.1591	* 2.5140	* 2.8067	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0685	* 1.4272	* 1.3752	* 1.1997	* 1.3243	* 1.2278	* 1.1834	* .6589
	* 1.7632	* 1.3204	* 1.3719	* 1.5761	* 1.4258	* 1.5414	* 1.5997	* 2.8710
9	* 1.4272	* 1.4251	* 1.2647	* 1.3113	* 1.2723	* 1.3893	* 1.3178	* .7868
	* 1.3204	* 1.3228	* 1.4927	* 1.4399	* 1.4897	* 1.3620	* 1.4390	* 2.4040
10	* 1.3752	* 1.2636	* 1.3124	* 1.1997	* 1.4218	* 1.4489	* 1.3113	* .6762
	* 1.3719	* 1.4937	* 1.4378	* 1.5791	* 1.3327	* 1.3086	* 1.4461	* 2.8046
11	* 1.1997	* 1.3134	* 1.1997	* 1.3243	* 1.3145	* 1.4652	* 1.3069	* .6047
	* 1.5761	* 1.4371	* 1.5804	* 1.4310	* 1.4438	* 1.2937	* 1.4531	* 3.1359
12	* 1.3243	* 1.2712	* 1.4207	* 1.3145	* 1.4597	* 1.4045	* .8745	*
	* 1.4258	* 1.4897	* 1.3333	* 1.4438	* 1.2994	* 1.3539	* 2.1718	*
13	* 1.2278	* 1.3871	* 1.4500	* 1.4662	* 1.4045	* 1.2961	* .6513	*
	* 1.5414	* 1.3644	* 1.3078	* 1.2939	* 1.3530	* 1.4678	* 2.9166	*
14	* 1.1834	* 1.3178	* 1.3113	* 1.3069	* .8745	* .6513	*	*
	* 1.5997	* 1.4380	* 1.4461	* 1.4522	* 2.1698	* 2.9173	*	*
15	* .6589	* .7889	* .6762	* .6047	* F-SUB-Q			
	* 2.8710	* 2.3991	* 2.8053	* 3.1367	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 192 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8670	* 1.0609	* 1.0393	* .9938	* 1.0913	* .9927	* .9439	* .5343
	* 2.1488	* 1.7553	* 1.7925	* 1.8793	* 1.7104	* 1.8829	* 1.9842	* 3.5070
9	* 1.0609	* 1.0664	* 1.0100	* 1.0252	* 1.0143	* 1.0707	* 1.0328	* .6134
	* 1.7553	* 1.7459	* 1.8471	* 1.8180	* 1.8451	* 1.7473	* 1.8135	* 3.0520
10	* 1.0393	* 1.0089	* 1.0295	* .9840	* 1.0707	* 1.0750	* 1.0100	* .5353
	* 1.7925	* 1.8489	* 1.8110	* 1.9027	* 1.7467	* 1.7431	* 1.8562	* 3.5018
11	* .9938	* 1.0273	* .9840	* 1.0295	* 1.0490	* 1.1574	* 1.0133	* .4844
	* 1.8793	* 1.8152	* 1.9027	* 1.8186	* 1.7876	* 1.6204	* 1.8515	* 3.8795
12	* 1.0913	* 1.0133	* 1.0707	* 1.0490	* 1.1867	* 1.1260	* .7098	*
	* 1.7104	* 1.8465	* 1.7496	* 1.7876	* 1.5791	* 1.6673	* 2.6439	*
13	* .9927	* 1.0696	* 1.0750	* 1.1574	* 1.1260	* 1.0111	* .5267	*
	* 1.8829	* 1.7499	* 1.7418	* 1.6193	* 1.6661	* 1.8588	* 3.5709	*
14	* .9439	* 1.0328	* 1.0100	* 1.0143	* .7098	* .5267	*	*
	* 1.9842	* 1.8138	* 1.8562	* 1.8497	* 2.6445	* 3.5709	*	*
15	* .5343	* .6145	* .5353	* .4844	* F-SUB-Q			
	* 3.5070	* 3.0481	* 3.5018	* 3.8718	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .5722	* .4497	* .4682	* .5213	* .4855	* .5115	* .4324	* .2644
	* 3.2403	* 4.1156	* 3.9524	* 3.5557	* 3.8165	* 3.6304	* 4.3039	* 7.0434
9	* .4497	* .4768	* .5137	* .4779	* .5213	* .4768	* .4508	* .2807
	* 4.1156	* 3.8858	* 3.6059	* 3.8807	* 3.5622	* 3.8949	* 4.1345	* 6.6380
10	* .4682	* .5137	* .4725	* .5137	* .4725	* .4541	* .4432	* .2763
	* 3.9524	* 3.6070	* 3.9260	* 3.6181	* 3.9339	* 4.1027	* 4.2024	* 6.7330
11	* .5213	* .4779	* .5137	* .4898	* .5364	* .4963	* .4237	* .2427
	* 3.5557	* 3.8730	* 3.6181	* 3.7968	* 3.4708	* 3.7544	* 4.4120	* 7.7030
12	* .4855	* .5213	* .4725	* .5364	* .5104	* .4963	* .3609	*
	* 3.8165	* 3.5633	* 3.9326	* 3.4708	* 3.6473	* 3.7616	* 5.1612	*
13	* .5115	* .4768	* .4541	* .4963	* .4963	* .4346	* .2666	*
	* 3.6304	* 3.8949	* 4.0956	* 3.7544	* 3.7616	* 4.3023	* 7.0224	*
14	* .4324	* .4508	* .4432	* .4237	* .3620	* .2666	*	*
	* 4.3039	* 4.1345	* 4.2024	* 4.4021	* 5.1612	* 7.0224	*	*
15	* .2644	* .2818	* .2774	* .2427	* F-SUB-Q			
	* 7.0434	* 6.6193	* 6.7369	* 7.7030	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 193 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6578 *	* .5397 *	* .5310 *	* .5364 *	* .5028 *	* .5115 *	* .4552 *	* .2991 *
	* 3.0203 *	* 3.8856 *	* 3.8859 *	* 3.5980 *	* 3.8799 *	* 3.6294 *	* 4.1804 *	* 6.2363 *
9	* .5397 *	* .5429 *	* .5635 *	* .5137 *	* .5245 *	* .4953 *	* .4617 *	* .3154 *
	* 3.8856 *	* 3.8407 *	* 3.5805 *	* 3.8911 *	* 3.6063 *	* 3.8902 *	* 4.0400 *	* 5.9600 *
10	* .5310 *	* .5635 *	* .5256 *	* .5223 *	* .4974 *	* .4822 *	* .4562 *	* .3099 *
	* 3.8859 *	* 3.5805 *	* 3.9068 *	* 3.7331 *	* 4.0116 *	* 4.1455 *	* 4.1761 *	* 6.1572 *
11	* .5364 *	* .5148 *	* .5234 *	* .4877 *	* .4996 *	* .4736 *	* .4183 *	* .2677 *
	* 3.5980 *	* 3.8911 *	* 3.7331 *	* 4.1995 *	* 4.1222 *	* 4.4772 *	* 4.7782 *	* 7.3615 *
12	* .5028 *	* .5245 *	* .4974 *	* .4996 *	* .4378 *	* .4194 *	* .3598 *	
	* 3.8799 *	* 3.6063 *	* 4.0116 *	* 4.1188 *	* 4.3924 *	* 4.5010 *	* 5.8172 *	
13	* .5115 *	* .4953 *	* .4822 *	* .4736 *	* .4194 *	* .3641 *	* .2633 *	
	* 3.6294 *	* 3.8902 *	* 4.1455 *	* 4.4772 *	* 4.5010 *	* 5.0862 *	* 7.7060 *	
14	* .4552 *	* .4617 *	* .4562 *	* .4183 *	* .3598 *	* .2633 *		
	* 4.1804 *	* 4.0400 *	* 4.1750 *	* 4.7782 *	* 5.8172 *	* 7.7060 *		
15	* .2991 *	* .3154 *	* .3099 *	* .2677 *	F-SUB-Q			
	* 6.2363 *	* 5.9499 *	* 6.1465 *	* 7.3615 *	M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9417 *	* 1.2885 *	* 1.2257 *	* .9645 *	* 1.0653 *	* .9396 *	* .9569 *	* .5841 *
	* 2.1284 *	* 1.6924 *	* 1.7918 *	* 2.1065 *	* 1.9007 *	* 2.0730 *	* 2.0645 *	* 3.3341 *
9	* 1.2885 *	* 1.2929 *	* 1.0674 *	* 1.1032 *	* .9786 *	* 1.1270 *	* .9927 *	* .6784 *
	* 1.6924 *	* 1.7113 *	* 2.0160 *	* 1.8840 *	* 2.0423 *	* 1.8141 *	* 1.9633 *	* 2.8807 *
10	* 1.2257 *	* 1.0674 *	* 1.1151 *	* .9374 *	* 1.1390 *	* 1.1433 *	* .9786 *	* .5765 *
	* 1.7918 *	* 2.0160 *	* 1.9021 *	* 2.1697 *	* 1.8390 *	* 1.8199 *	* 2.0253 *	* 3.4661 *
11	* .9645 *	* 1.1043 *	* .9385 *	* 1.0469 *	* .9602 *	* 1.0891 *	* .9374 *	* .5137 *
	* 2.1065 *	* 1.8828 *	* 2.1663 *	* 2.0866 *	* 2.2388 *	* 2.0348 *	* 2.2248 *	* 3.9931 *
12	* 1.0653 *	* .9786 *	* 1.1390 *	* .9602 *	* .9569 *	* .9396 *	* .6838 *	
	* 1.9007 *	* 2.0423 *	* 1.8402 *	* 2.2388 *	* 2.0432 *	* 2.1723 *	* 3.1799 *	
13	* .9396 *	* 1.1270 *	* 1.1433 *	* 1.0902 *	* .9396 *	* .8442 *	* .5104 *	
	* 2.0730 *	* 1.8150 *	* 1.8199 *	* 2.0340 *	* 2.1707 *	* 2.3747 *	* 4.1539 *	
14	* .9569 *	* .9927 *	* .9786 *	* .9374 *	* .6838 *	* .5104 *		
	* 2.0645 *	* 1.9633 *	* 2.0253 *	* 2.2246 *	* 3.1799 *	* 4.1539 *		
15	* .5841 *	* .6795 *	* .5765 *	* .5137 *	F-SUB-Q			
	* 3.3341 *	* 2.8779 *	* 3.4654 *	* 3.9931 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 194 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2484	* 1.6255	* 1.5183	* 1.2007	* 1.3026	* 1.1780	* 1.1867	* .7142
	* 1.8133	* 1.4040	* 1.4902	* 1.7406	* 1.5985	* 1.6978	* 1.7144	* 2.8098
9	* 1.6255	* 1.6180	* 1.3427	* 1.3557	* 1.2354	* 1.4012	* 1.2636	* .8464
	* 1.4040	* 1.4187	* 1.6503	* 1.5801	* 1.6581	* 1.4965	* 1.5847	* 2.3807
10	* 1.5183	* 1.3416	* 1.3698	* 1.1650	* 1.4207	* 1.4337	* 1.2549	* .7109
	* 1.4902	* 1.6520	* 1.5957	* 1.7911	* 1.5154	* 1.4898	* 1.6191	* 2.8859
11	* 1.2007	* 1.3568	* 1.1682	* 1.2939	* 1.2278	* 1.3741	* 1.2127	* .6350
	* 1.7406	* 1.5785	* 1.7900	* 1.7498	* 1.8071	* 1.6614	* 1.7703	* 3.3316
12	* 1.3026	* 1.2354	* 1.4196	* 1.2278	* 1.3124	* 1.2365	* .8475	*
	* 1.5985	* 1.6591	* 1.5162	* 1.8066	* 1.6827	* 1.7399	* 2.6498	*
13	* 1.1780	* 1.4012	* 1.4337	* 1.3741	* 1.2365	* 1.1260	* .6350	*
	* 1.6978	* 1.4972	* 1.4898	* 1.6610	* 1.7393	* 1.8796	* 3.4603	*
14	* 1.1867	* 1.2647	* 1.2549	* 1.2127	* .8485	* .6350	*	*
	* 1.7144	* 1.5847	* 1.6191	* 1.7694	* 2.6485	* 3.4603	*	*
15	* .7142	* .8475	* .7109	* .6350	* F-SUB-Q			
	* 2.8098	* 2.3768	* 2.8855	* 3.3278	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3850	* 1.8239	* 1.7112	* 1.3882	* 1.4879	* 1.3720	* 1.3579	* .8019
	* 1.6978	* 1.2945	* 1.3557	* 1.5365	* 1.4353	* 1.4925	* 1.5343	* 2.5635
9	* 1.8239	* 1.8152	* 1.5432	* 1.5432	* 1.4337	* 1.5952	* 1.4803	* .9634
	* 1.2945	* 1.3054	* 1.4711	* 1.4231	* 1.4649	* 1.3487	* 1.3847	* 2.1416
10	* 1.7112	* 1.5410	* 1.5573	* 1.3514	* 1.6180	* 1.6342	* 1.4717	* .8095
	* 1.3557	* 1.4719	* 1.4410	* 1.5808	* 1.3677	* 1.3428	* 1.4137	* 2.6059
11	* 1.3882	* 1.5443	* 1.3546	* 1.4858	* 1.4370	* 1.5876	* 1.4316	* .7261
	* 1.5365	* 1.4219	* 1.5806	* 1.5737	* 1.5861	* 1.4794	* 1.5391	* 2.9956
12	* 1.4879	* 1.4337	* 1.6158	* 1.4370	* 1.5399	* 1.4727	* .9753	*
	* 1.4353	* 1.4656	* 1.3690	* 1.5861	* 1.4915	* 1.5123	* 2.3782	*
13	* 1.3720	* 1.5941	* 1.6342	* 1.5887	* 1.4727	* 1.3590	* .7326	*
	* 1.4925	* 1.3499	* 1.3428	* 1.4791	* 1.5119	* 1.6162	* 3.1068	*
14	* 1.3579	* 1.4803	* 1.4717	* 1.4316	* .9753	* .7326	*	*
	* 1.5343	* 1.3847	* 1.4137	* 1.5391	* 2.3763	* 3.1068	*	*
15	* .8019	* .9656	* .8106	* .7272	* F-SUB-Q			
	* 2.5635	* 2.1385	* 2.6059	* 2.9926	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 195 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.4283	* 1.8954	* 1.7914	* 1.4825	* 1.5833	* 1.4749	* 1.4457	* .8431
	* 1.7047	* 1.2879	* 1.3354	* 1.4759	* 1.3917	* 1.4289	* 1.4863	* 2.5175
9	* 1.8954	* 1.8878	* 1.6331	* 1.6331	* 1.5367	* 1.6906	* 1.5952	* 1.0176
	* 1.2879	* 1.2967	* 1.4307	* 1.3882	* 1.4052	* 1.3109	* 1.3231	* 2.0923
10	* 1.7914	* 1.6310	* 1.6472	* 1.4489	* 1.7144	* 1.7361	* 1.5876	* .8583
	* 1.3354	* 1.4313	* 1.4056	* 1.5203	* 1.3296	* 1.3046	* 1.3466	* 2.5318
11	* 1.4825	* 1.6353	* 1.4500	* 1.5865	* 1.5497	* 1.7003	* 1.5497	* .7727
	* 1.4759	* 1.3863	* 1.5203	* 1.5264	* 1.5166	* 1.4261	* 1.4601	* 2.8984
12	* 1.5833	* 1.5367	* 1.7133	* 1.5497	* 1.6613	* 1.6039	* 1.0414	*
	* 1.3917	* 1.4059	* 1.3308	* 1.5162	* 1.4310	* 1.4336	* 2.3029	*
13	* 1.4749	* 1.6895	* 1.7372	* 1.7014	* 1.6039	* 1.4901	* .7835	*
	* 1.4289	* 1.3121	* 1.3040	* 1.4254	* 1.4333	* 1.5250	* 3.0111	*
14	* 1.4457	* 1.5952	* 1.5876	* 1.5508	* 1.0425	* .7835	*	*
	* 1.4863	* 1.3231	* 1.3466	* 1.4601	* 2.3029	* 3.0111	*	*
15	* .8431	* 1.0198	* .8583	* .7727	* F-SUB-Q			
	* 2.5175	* 2.0882	* 2.5318	* 2.8955	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.4457	* 1.9225	* 1.8282	* 1.5291	* 1.6386	* 1.5324	* 1.4944	* .8659
	* 1.7426	* 1.3124	* 1.3523	* 1.4664	* 1.3880	* 1.4161	* 1.4812	* 2.5273
9	* 1.9225	* 1.9160	* 1.6732	* 1.6808	* 1.5941	* 1.7448	* 1.6602	* 1.0469
	* 1.3124	* 1.3193	* 1.4407	* 1.3905	* 1.3982	* 1.3110	* 1.3078	* 2.0966
10	* 1.8282	* 1.6711	* 1.6927	* 1.5020	* 1.7718	* 1.7968	* 1.6537	* .8854
	* 1.3523	* 1.4407	* 1.4141	* 1.5124	* 1.3325	* 1.3058	* 1.3325	* 2.5379
11	* 1.5291	* 1.6830	* 1.5020	* 1.6451	* 1.6136	* 1.7675	* 1.6190	* .7987
	* 1.4664	* 1.3893	* 1.5116	* 1.5218	* 1.4975	* 1.4134	* 1.4479	* 2.9064
12	* 1.6386	* 1.5930	* 1.7708	* 1.6147	* 1.7339	* 1.6819	* 1.0804	*
	* 1.3880	* 1.3982	* 1.3337	* 1.4975	* 1.4195	* 1.4130	* 2.2961	*
13	* 1.5324	* 1.7437	* 1.7968	* 1.7686	* 1.6819	* 1.5681	* .8128	*
	* 1.4161	* 1.3121	* 1.3058	* 1.4127	* 1.4130	* 1.5038	* 3.0150	*
14	* 1.4944	* 1.6602	* 1.6537	* 1.6201	* 1.0804	* .8128	*	*
	* 1.4812	* 1.3078	* 1.3325	* 1.4472	* 2.2961	* 3.0149	*	*
15	* .8659	* 1.0490	* .8854	* .7987	* F-SUB-Q			
	* 2.5273	* 2.0923	* 2.5358	* 2.9064	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 196 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.4630	* 1.9539	* 1.8650	* 1.5692	* 1.6895	* 1.5811	* 1.5410	* .8886
	* 1.7811	* 1.3345	* 1.3825	* 1.4824	* 1.4044	* 1.4278	* 1.4947	* 2.5592
9	* 1.9539	* 1.9485	* 1.7079	* 1.7253	* 1.6451	* 1.8000	* 1.7177	* 1.0750
	* 1.3345	* 1.3387	* 1.4681	* 1.4116	* 1.4118	* 1.3267	* 1.3158	* 2.1240
10	* 1.8650	* 1.7068	* 1.7361	* 1.5475	* 1.8293	* 1.8575	* 1.7122	* .9125
	* 1.3825	* 1.4681	* 1.4385	* 1.5301	* 1.3510	* 1.3220	* 1.3407	* 2.5723
11	* 1.5692	* 1.7274	* 1.5475	* 1.7003	* 1.6711	* 1.8325	* 1.6808	* .8236
	* 1.4824	* 1.4103	* 1.5293	* 1.5266	* 1.4857	* 1.4037	* 1.4578	* 2.9487
12	* 1.6895	* 1.6440	* 1.8282	* 1.6711	* 1.8022	* 1.7513	* 1.1184	*
	* 1.4044	* 1.4125	* 1.3528	* 1.4857	* 1.4145	* 1.4043	* 2.3001	*
13	* 1.5811	* 1.7979	* 1.8575	* 1.8336	* 1.7513	* 1.6364	* .8410	*
	* 1.4278	* 1.3284	* 1.3215	* 1.4031	* 1.4036	* 1.4912	* 3.0189	*
14	* 1.5410	* 1.7177	* 1.7122	* 1.6819	* 1.1195	* .8420	*	*
	* 1.4947	* 1.3152	* 1.3407	* 1.4578	* 2.2984	* 3.0189	*	*
15	* .8886	* 1.0772	* .9125	* .8236	* F-SUB-Q			
	* 2.5592	* 2.1195	* 2.5701	* 2.9458	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.4489	* 1.9452	* 1.8629	* 1.5822	* 1.7036	* 1.6039	* 1.5540	* .8908
	* 1.8533	* 1.3836	* 1.4515	* 1.5487	* 1.4684	* 1.4889	* 1.5595	* 2.6856
9	* 1.9452	* 1.9409	* 1.7155	* 1.7328	* 1.6678	* 1.8152	* 1.7448	* 1.0804
	* 1.3836	* 1.3887	* 1.5210	* 1.4799	* 1.4739	* 1.3880	* 1.3687	* 2.2242
10	* 1.8629	* 1.7133	* 1.7404	* 1.5692	* 1.8466	* 1.8781	* 1.7404	* .9190
	* 1.4515	* 1.5226	* 1.5114	* 1.6002	* 1.4151	* 1.3836	* 1.3954	* 2.6903
11	* 1.5822	* 1.7350	* 1.5681	* 1.7155	* 1.6992	* 1.8596	* 1.7133	* .8290
	* 1.5487	* 1.4785	* 1.5993	* 1.5570	* 1.5143	* 1.4297	* 1.4963	* 3.0890
12	* 1.7036	* 1.6667	* 1.8455	* 1.6992	* 1.8325	* 1.7870	* 1.1325	*
	* 1.4684	* 1.4747	* 1.4171	* 1.5138	* 1.4405	* 1.4283	* 2.3397	*
13	* 1.6039	* 1.8130	* 1.8781	* 1.8607	* 1.7881	* 1.6732	* .8518	*
	* 1.4889	* 1.3899	* 1.3836	* 1.4290	* 1.4276	* 1.5188	* 3.0869	*
14	* 1.5540	* 1.7448	* 1.7404	* 1.7133	* 1.1325	* .8529	*	*
	* 1.5595	* 1.3687	* 1.3954	* 1.4955	* 2.3379	* 3.0869	*	*
15	* .8908	* 1.0826	* .9190	* .8301	* F-SUB-Q			
	* 2.6856	* 2.2194	* 2.6903	* 3.0890	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 197 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.4457	* 1.9431	* 1.8640	* 1.5909	* 1.7177	* 1.6201	* 1.5692	* .8962
	* 1.9522	* 1.4532	* 1.5144	* 1.6472	* 1.5486	* 1.5790	* 1.6407	* 2.8337
9	* 1.9431	* 1.9398	* 1.7187	* 1.7415	* 1.6852	* 1.8315	* 1.7664	* 1.0870
	* 1.4532	* 1.4571	* 1.6003	* 1.5645	* 1.5657	* 1.4642	* 1.4499	* 2.3455
10	* 1.8640	* 1.7177	* 1.7480	* 1.5855	* 1.8650	* 1.8986	* 1.7632	* .9266
	* 1.5144	* 1.6020	* 1.6021	* 1.7027	* 1.4942	* 1.4593	* 1.4779	* 2.8337
11	* 1.5909	* 1.7437	* 1.5844	* 1.7328	* 1.7220	* 1.8856	* 1.7383	* .8366
	* 1.6472	* 1.5629	* 1.7018	* 1.6117	* 1.5760	* 1.4749	* 1.5546	* 3.2588
12	* 1.7177	* 1.6841	* 1.8640	* 1.7220	* 1.8596	* 1.8163	* 1.1466	*
	* 1.5486	* 1.5666	* 1.4964	* 1.5760	* 1.4879	* 1.4813	* 2.4133	*
13	* 1.6201	* 1.8293	* 1.8997	* 1.8867	* 1.8163	* 1.7014	* .8626	*
	* 1.5790	* 1.4656	* 1.4593	* 1.4741	* 1.4808	* 1.5712	* 3.1794	*
14	* 1.5692	* 1.7664	* 1.7632	* 1.7383	* 1.1466	* .8626	*	*
	* 1.6407	* 1.4491	* 1.4779	* 1.5544	* 2.4122	* 3.1794	*	*
15	* .8962	* 1.0902	* .9266	* .8377	* F-SUB-Q			
	* 2.8337	* 2.3401	* 2.8337	* 3.2552	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.4196	* 1.9051	* 1.8293	* 1.5638	* 1.6971	* 1.5995	* 1.5519	* .8854
	* 2.1034	* 1.5631	* 1.6203	* 1.8071	* 1.6825	* 1.7296	* 1.7775	* 3.0688
9	* 1.9051	* 1.9019	* 1.6862	* 1.7144	* 1.6646	* 1.8109	* 1.7458	* 1.0718
	* 1.5631	* 1.5640	* 1.7256	* 1.7030	* 1.7158	* 1.5888	* 1.5853	* 2.5446
10	* 1.8293	* 1.6841	* 1.7198	* 1.5649	* 1.8455	* 1.8802	* 1.7437	* .9157
	* 1.6203	* 1.7276	* 1.7179	* 1.8454	* 1.5875	* 1.5534	* 1.6167	* 3.0718
11	* 1.5638	* 1.7166	* 1.5638	* 1.7144	* 1.7036	* 1.8715	* 1.7209	* .8269
	* 1.8071	* 1.7011	* 1.8465	* 1.7215	* 1.6874	* 1.5644	* 1.6573	* 3.4712
12	* 1.6971	* 1.6635	* 1.8445	* 1.7036	* 1.8445	* 1.8011	* 1.1357	*
	* 1.6825	* 1.7168	* 1.5890	* 1.6872	* 1.5885	* 1.5915	* 2.5701	*
13	* 1.5995	* 1.8087	* 1.8813	* 1.8715	* 1.8011	* 1.6873	* .8540	*
	* 1.7296	* 1.5897	* 1.5526	* 1.5636	* 1.5912	* 1.6884	* 3.3889	*
14	* 1.5519	* 1.7458	* 1.7437	* 1.7220	* 1.1357	* .8540	*	*
	* 1.7775	* 1.5853	* 1.6158	* 1.6566	* 2.5701	* 3.3868	*	*
15	* .8854	* 1.0750	* .9157	* .8279	* F-SUB-Q			
	* 3.0688	* 2.5405	* 3.0718	* 3.4705	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 198 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.4077	* 1.8954	* 1.8250	* 1.5714	* 1.7036	* 1.6136	* 1.5584	* .8854 *
	* 2.1856	* 1.6204	* 1.6818	* 1.9220	* 1.7903	* 1.8621	* 1.9062	* 3.3035 *
9	* 1.8954	* 1.8932	* 1.6895	* 1.7155	* 1.6787	* 1.8184	* 1.7653	* 1.0739 *
	* 1.6204	* 1.6221	* 1.7962	* 1.7842	* 1.8004	* 1.6791	* 1.7029	* 2.7335 *
10	* 1.8250	* 1.6873	* 1.7209	* 1.5779	* 1.8542	* 1.8921	* 1.7643	* .9190 *
	* 1.6818	* 1.7983	* 1.7831	* 1.9245	* 1.6541	* 1.6196	* 1.7130	* 3.2911 *
11	* 1.5714	* 1.7187	* 1.5768	* 1.7220	* 1.7231	* 1.8878	* 1.7437	* .8290 *
	* 1.9220	* 1.7821	* 1.9257	* 1.7872	* 1.7611	* 1.6255	* 1.7382	* 3.6623 *
12	* 1.7036	* 1.6787	* 1.8531	* 1.7231	* 1.8640	* 1.8260	* 1.1444	*
	* 1.7903	* 1.8014	* 1.6549	* 1.7611	* 1.6558	* 1.6674	* 2.6909	*
13	* 1.6136	* 1.8163	* 1.8932	* 1.8889	* 1.8271	* 1.7144	* .8605	*
	* 1.8621	* 1.6818	* 1.6187	* 1.6247	* 1.6665	* 1.7778	* 3.5609	*
14	* 1.5584	* 1.7653	* 1.7643	* 1.7448	* 1.1444	* .8605	*	
	* 1.9062	* 1.7029	* 1.7121	* 1.7382	* 2.6886	* 3.5575	*	
15	* .8854	* 1.0761	* .9190	* .8301	* F-SUB-Q			
	* 3.3035	* 2.7263	* 3.2893	* 3.6623	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3828	* 1.8640	* 1.7968	* 1.5562	* 1.6884	* 1.6028	* 1.5454	* .8745 *
	* 2.2549	* 1.6707	* 1.7299	* 1.9793	* 1.8301	* 1.9172	* 1.9896	* 3.5102 *
9	* 1.8640	* 1.8618	* 1.6667	* 1.6949	* 1.6667	* 1.8022	* 1.7556	* 1.0620 *
	* 1.6707	* 1.6725	* 1.8588	* 1.8301	* 1.8522	* 1.7175	* 1.7552	* 2.8959 *
10	* 1.7968	* 1.6656	* 1.6992	* 1.5659	* 1.8390	* 1.8781	* 1.7545	* .9103 *
	* 1.7299	* 1.8599	* 1.8290	* 1.9831	* 1.6924	* 1.6557	* 1.7581	* 3.3959 *
11	* 1.5562	* 1.6982	* 1.5649	* 1.7068	* 1.7144	* 1.8791	* 1.7383	* .8214 *
	* 1.9793	* 1.8279	* 1.9843	* 1.8333	* 1.8123	* 1.6601	* 1.7853	* 3.7773 *
12	* 1.6884	* 1.6667	* 1.8369	* 1.7144	* 1.8553	* 1.8217	* 1.1368	*
	* 1.8301	* 1.8533	* 1.6943	* 1.8123	* 1.6943	* 1.7165	* 2.7532	*
13	* 1.6028	* 1.8000	* 1.8791	* 1.8791	* 1.8217	* 1.7112	* .8550	*
	* 1.9172	* 1.7194	* 1.6557	* 1.6601	* 1.7165	* 1.8337	* 3.6795	*
14	* 1.5454	* 1.7556	* 1.7556	* 1.7383	* 1.1368	* .8550	*	
	* 1.9896	* 1.7552	* 1.7581	* 1.7843	* 2.7532	* 3.6752	*	
15	* .8745	* 1.0642	* .9103	* .8225	* F-SUB-Q			
	* 3.5102	* 2.8879	* 3.3922	* 3.7773	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 199 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3503	* 1.8174	* 1.7534	* 1.5237	* 1.6537	* 1.5703	* 1.5161	* .8572
	* 2.3344	* 1.7324	* 1.7918	* 2.0493	* 1.8855	* 1.9807	* 2.0360	* 3.5774
9	* 1.8174	* 1.8163	* 1.6266	* 1.6570	* 1.6353	* 1.7686	* 1.7231	* 1.0404
	* 1.7324	* 1.7334	* 1.9319	* 1.8900	* 1.9131	* 1.7666	* 1.8125	* 2.9654
10	* 1.7534	* 1.6245	* 1.6602	* 1.5345	* 1.8054	* 1.8466	* 1.7231	* .8919
	* 1.7918	* 1.9343	* 1.8900	* 2.0519	* 1.7420	* 1.7033	* 1.8146	* 3.4899
11	* 1.5237	* 1.6602	* 1.5334	* 1.6743	* 1.6841	* 1.8488	* 1.7079	* .8052
	* 2.0493	* 1.8866	* 2.0533	* 1.8900	* 1.8720	* 1.7070	* 1.8434	* 3.8829
12	* 1.6537	* 1.6342	* 1.8033	* 1.6841	* 1.8250	* 1.7924	* 1.1173	*
	* 1.8855	* 1.9142	* 1.7440	* 1.8720	* 1.7440	* 1.7725	* 2.8342	*
13	* 1.5703	* 1.7664	* 1.8466	* 1.8499	* 1.7935	* 1.6841	* .8388	*
	* 1.9807	* 1.7685	* 1.7023	* 1.7060	* 1.7725	* 1.8957	* 3.7937	*
14	* 1.5161	* 1.7231	* 1.7231	* 1.7090	* 1.1173	* .8388	*	*
	* 2.0360	* 1.8125	* 1.8146	* 1.8423	* 2.8342	* 3.7891	*	*
15	* .8572	* 1.0425	* .8919	* .8063	* F-SUB-Q			
	* 3.5774	* 2.9598	* 3.4860	* 3.8829	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3373	* 1.8076	* 1.7448	* 1.5215	* 1.6526	* 1.5714	* 1.5161	* .8540
	* 2.2975	* 1.6957	* 1.7447	* 1.9683	* 1.8136	* 1.9042	* 1.9621	* 3.4401
9	* 1.8076	* 1.8054	* 1.6201	* 1.6516	* 1.6364	* 1.7686	* 1.7285	* 1.0382
	* 1.6957	* 1.6981	* 1.8747	* 1.8227	* 1.8445	* 1.7104	* 1.7434	* 2.8386
10	* 1.7448	* 1.6190	* 1.6548	* 1.5345	* 1.8065	* 1.8499	* 1.7296	* .8908
	* 1.7447	* 1.8769	* 1.8242	* 1.9800	* 1.6905	* 1.6551	* 1.7460	* 3.3226
11	* 1.5215	* 1.6548	* 1.5334	* 1.6743	* 1.6884	* 1.8553	* 1.7166	* .8041
	* 1.9683	* 1.8196	* 1.9771	* 1.8332	* 1.8130	* 1.6585	* 1.7760	* 3.6973
12	* 1.6526	* 1.6353	* 1.8044	* 1.6884	* 1.8325	* 1.8022	* 1.1195	*
	* 1.8136	* 1.8456	* 1.6923	* 1.8130	* 1.7013	* 1.7181	* 2.7245	*
13	* 1.5714	* 1.7664	* 1.8510	* 1.8564	* 1.8033	* 1.6949	* .8399	*
	* 1.9042	* 1.7110	* 1.6543	* 1.6576	* 1.7163	* 1.8276	* 3.6206	*
14	* 1.5161	* 1.7285	* 1.7296	* 1.7177	* 1.1195	* .8410	*	*
	* 1.9621	* 1.7434	* 1.7460	* 1.7774	* 2.7231	* 3.6206	*	*
15	* .8540	* 1.0404	* .8908	* .8052	* F-SUB-Q			
	* 3.4401	* 2.8361	* 3.3145	* 3.6973	* M-SUB-Q			

CNEI-0400-24
Appendix A, Rev. 18
Page 200 of 268

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

	H	G	F	E	D	C	B	A
8	1.3048	1.7686	1.7090	1.4988	1.6255	1.5497	1.4912	.8366
	2.1208	1.5633	1.6101	1.8170	1.6796	1.7570	1.8174	3.1903
9	1.7686	1.7675	1.5920	1.6212	1.6147	1.7404	1.7079	1.0198
	1.5633	1.5665	1.7246	1.6850	1.6984	1.5785	1.6043	2.6361
10	1.7090	1.5909	1.6234	1.5128	1.7794	1.8239	1.7101	.8756
	1.6101	1.7277	1.6866	1.8189	1.5571	1.5207	1.6049	3.0792
11	1.4988	1.6245	1.5118	1.6472	1.6700	1.8325	1.7003	.7900
	1.8170	1.6823	1.8213	1.6842	1.6619	1.5200	1.6263	3.4229
12	1.6255	1.6136	1.7773	1.6700	1.8109	1.7859	1.1032	
	1.6796	1.6993	1.5587	1.6619	1.5590	1.5700	2.4998	
13	1.5497	1.7383	1.8250	1.8336	1.7859	1.6808	.8279	
	1.7570	1.5809	1.5216	1.5192	1.5710	1.6712	3.3300	
14	1.4912	1.7090	1.7112	1.7014	1.1043	.8279		
	1.8174	1.6043	1.6059	1.6254	2.4978	3.3218		
15	.8366	1.0219	.8756	.7900	F-SUB-Q			
	3.1903	2.6295	3.0762	3.4229	M-SUB-Q			

	H	G	F	E	D	C	B	A
8	1.2701	1.7231	1.6646	1.4641	1.5876	1.5161	1.4565	.8149
	1.9884	1.4635	1.5109	1.7059	1.5748	1.6457	1.7011	3.0019
9	1.7231	1.7220	1.5529	1.5811	1.5800	1.7014	1.6732	.9938
	1.4635	1.4655	1.6178	1.5835	1.5921	1.4810	1.5041	2.4750
10	1.6646	1.5519	1.5833	1.4803	1.7393	1.7849	1.6754	.8540
	1.5109	1.6175	1.5841	1.7026	1.4562	1.4217	1.5043	2.8997
11	1.4641	1.5844	1.4793	1.6104	1.6364	1.7957	1.6667	.7705
	1.7059	1.5811	1.7024	1.5764	1.5512	1.4179	1.5194	3.2224
12	1.5876	1.5790	1.7372	1.6364	1.7740	1.7523	1.0794	
	1.5748	1.5929	1.4576	1.5512	1.4527	1.4624	2.3379	
13	1.5161	1.6982	1.7859	1.7968	1.7534	1.6494	.8095	
	1.6457	1.4831	1.4225	1.4172	1.4624	1.5539	3.1110	
14	1.4565	1.6732	1.6765	1.6678	1.0794	.8095		
	1.7011	1.5041	1.5026	1.5187	2.3402	3.1150		
15	.8149	.9959	.8540	.7705	F-SUB-Q			
	3.0019	2.4691	2.8970	3.2253	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 201 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2300	* 1.6667	* 1.6115	* 1.4142	* 1.5367	* 1.4652	* 1.4121	* .7889
	* 1.8862	* 1.3928	* 1.4385	* 1.6247	* 1.4960	* 1.5686	* 1.6194	* 2.8648
9	* 1.6667	* 1.6667	* 1.4998	* 1.5291	* 1.5291	* 1.6494	* 1.6190	* .9612
	* 1.3928	* 1.3941	* 1.5449	* 1.5079	* 1.5182	* 1.4054	* 1.4311	* 2.3647
10	* 1.6115	* 1.4988	* 1.5313	* 1.4305	* 1.6873	* 1.7328	* 1.6212	* .8269
	* 1.4385	* 1.5450	* 1.5100	* 1.6294	* 1.3869	* 1.3530	* 1.4326	* 2.7579
11	* 1.4142	* 1.5324	* 1.4294	* 1.5605	* 1.5844	* 1.7437	* 1.6136	* .7456
	* 1.6247	* 1.5052	* 1.6303	* 1.5012	* 1.4804	* 1.3478	* 1.4514	* 3.0824
12	* 1.5367	* 1.5280	* 1.6852	* 1.5844	* 1.7220	* 1.6982	* 1.0469	*
	* 1.4960	* 1.5189	* 1.3893	* 1.4804	* 1.3801	* 1.3921	* 2.2295	*
13	* 1.4652	* 1.6461	* 1.7328	* 1.7448	* 1.6992	* 1.5974	* .7835	*
	* 1.5686	* 1.4073	* 1.3525	* 1.3486	* 1.3915	* 1.4810	* 2.9741	*
14	* 1.4121	* 1.6190	* 1.6212	* 1.6147	* 1.0469	* .7835	*	*
	* 1.6194	* 1.4300	* 1.4326	* 1.4499	* 2.2279	* 2.9676	*	*
15	* .7889	* .9634	* .8269	* .7456	* F-SUB-Q			
	* 2.8648	* 2.3564	* 2.7596	* 3.0814	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1975	* 1.6299	* 1.5746	* 1.3893	* 1.5042	* 1.4402	* 1.3795	* .7683
	* 1.7814	* 1.3143	* 1.3582	* 1.5356	* 1.4186	* 1.4835	* 1.5407	* 2.7437
9	* 1.6299	* 1.6299	* 1.4727	* 1.4955	* 1.5020	* 1.6136	* 1.5930	* .9374
	* 1.3143	* 1.3155	* 1.4534	* 1.4276	* 1.4313	* 1.3320	* 1.3494	* 2.2546
10	* 1.5746	* 1.4717	* 1.4977	* 1.4056	* 1.6526	* 1.6982	* 1.5963	* .8063
	* 1.3582	* 1.4547	* 1.4273	* 1.5373	* 1.3120	* 1.2792	* 1.3490	* 2.6277
11	* 1.3893	* 1.4988	* 1.4045	* 1.5269	* 1.5594	* 1.7122	* 1.5909	* .7272
	* 1.5356	* 1.4250	* 1.5393	* 1.4260	* 1.3966	* 1.2752	* 1.3654	* 2.9327
12	* 1.5042	* 1.5020	* 1.6505	* 1.5584	* 1.6917	* 1.6743	* 1.0241	*
	* 1.4186	* 1.4320	* 1.3131	* 1.3966	* 1.3025	* 1.3138	* 2.1204	*
13	* 1.4402	* 1.6115	* 1.6992	* 1.7133	* 1.6743	* 1.5757	* .7662	*
	* 1.4835	* 1.3333	* 1.2778	* 1.2746	* 1.3133	* 1.3969	* 2.8320	*
14	* 1.3795	* 1.5930	* 1.5963	* 1.5920	* 1.0252	* .7673	*	*
	* 1.5407	* 1.3494	* 1.3490	* 1.3648	* 2.1204	* 2.8307	*	*
15	* .7683	* .9407	* .8074	* .7272	* F-SUB-Q			
	* 2.7437	* 2.2509	* 2.6277	* 2.9299	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 202 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1520	* 1.5692	* 1.5150	* 1.3351	* 1.4457	* 1.3839	* 1.3243	* .7358
	* 1.7191	* 1.2716	* 1.3189	* 1.5002	* 1.3846	* 1.4500	* 1.5092	* 2.6959
9	* 1.5692	* 1.5692	* 1.4164	* 1.4370	* 1.4446	* 1.5519	* 1.5313	* .8984
	* 1.2716	* 1.2730	* 1.4112	* 1.3914	* 1.3943	* 1.2975	* 1.3166	* 2.2165
10	* 1.5150	* 1.4153	* 1.4402	* 1.3503	* 1.5898	* 1.6342	* 1.5345	* .7727
	* 1.3189	* 1.4125	* 1.3897	* 1.4959	* 1.2742	* 1.2411	* 1.3151	* 2.5775
11	* 1.3351	* 1.4402	* 1.3492	* 1.4673	* 1.4998	* 1.6483	* 1.5302	* .6957
	* 1.5002	* 1.3889	* 1.4973	* 1.3833	* 1.3547	* 1.2347	* 1.3266	* 2.8720
12	* 1.4457	* 1.4435	* 1.5876	* 1.4998	* 1.6288	* 1.6115	* .9840	*
	* 1.3846	* 1.3960	* 1.2749	* 1.3543	* 1.2558	* 1.2711	* 2.0598	*
13	* 1.3839	* 1.5486	* 1.6342	* 1.6483	* 1.6115	* 1.5150	* .7347	*
	* 1.4500	* 1.3000	* 1.2406	* 1.2342	* 1.2714	* 1.3556	* 2.7581	*
14	* 1.3243	* 1.5313	* 1.5345	* 1.5302	* .9851	* .7358	*	*
	* 1.5092	* 1.3170	* 1.3155	* 1.3260	* 2.0585	* 2.7581	*	*
15	* .7358	* .9006	* .7738	* .6957	F-SUB-Q			
	* 2.6959	* 2.2118	* 2.5790	* 2.8738	M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0891	* 1.4793	* 1.4240	* 1.2463	* 1.3557	* 1.2896	* 1.2387	* .6881
	* 1.7163	* 1.2724	* 1.3257	* 1.5236	* 1.3999	* 1.4753	* 1.5308	* 2.7427
9	* 1.4793	* 1.4782	* 1.3264	* 1.3481	* 1.3492	* 1.4565	* 1.4251	* .8377
	* 1.2724	* 1.2739	* 1.4251	* 1.4053	* 1.4151	* 1.3090	* 1.3410	* 2.2604
10	* 1.4240	* 1.3254	* 1.3503	* 1.2603	* 1.4923	* 1.5324	* 1.4283	* .7207
	* 1.3257	* 1.4264	* 1.4019	* 1.5167	* 1.2818	* 1.2493	* 1.3389	* 2.6268
11	* 1.2463	* 1.3503	* 1.2593	* 1.3752	* 1.4001	* 1.5443	* 1.4229	* .6481
	* 1.5236	* 1.4023	* 1.5181	* 1.3928	* 1.3704	* 1.2440	* 1.3488	* 2.9271
12	* 1.3557	* 1.3481	* 1.4901	* 1.4001	* 1.5237	* 1.5009	* .9201	*
	* 1.3999	* 1.4157	* 1.2838	* 1.3715	* 1.2640	* 1.2862	* 2.0823	*
13	* 1.2896	* 1.4532	* 1.5334	* 1.5443	* 1.5020	* 1.4066	* .6860	*
	* 1.4753	* 1.3116	* 1.2488	* 1.2431	* 1.2857	* 1.3750	* 2.7938	*
14	* 1.2387	* 1.4251	* 1.4283	* 1.4229	* .9201	* .6860	*	*
	* 1.5308	* 1.3414	* 1.3389	* 1.3482	* 2.0810	* 2.7896	*	*
15	* .6881	* .8399	* .7217	* .6481	F-SUB-Q			
	* 2.7427	* 2.2539	* 2.6231	* 2.9271	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 203 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0273	* 1.3947	* 1.3416	* 1.1693	* 1.2777	* 1.2072	* 1.1585	* .6426
	* 1.7387	* 1.2893	* 1.3457	* 1.5549	* 1.4211	* 1.5092	* 1.5692	* 2.8172
9	* 1.3947	* 1.3936	* 1.2441	* 1.2701	* 1.2625	* 1.3676	* 1.3264	* .7781
	* 1.2893	* 1.2915	* 1.4520	* 1.4271	* 1.4469	* 1.3345	* 1.3806	* 2.3325
10	* 1.3416	* 1.2430	* 1.2712	* 1.1801	* 1.4012	* 1.4370	* 1.3275	* .6708
	* 1.3457	* 1.4533	* 1.4236	* 1.5492	* 1.3043	* 1.2740	* 1.3790	* 2.7107
11	* 1.1693	* 1.2723	* 1.1791	* 1.2918	* 1.3080	* 1.4478	* 1.3232	* .6015
	* 1.5549	* 1.4240	* 1.5500	* 1.4165	* 1.4013	* 1.2666	* 1.3877	* 3.0307
12	* 1.2777	* 1.2614	* 1.3991	* 1.3080	* 1.4316	* 1.4012	* .8605	*
	* 1.4211	* 1.4476	* 1.3063	* 1.4013	* 1.2832	* 1.3154	* 2.1293	*
13	* 1.2072	* 1.3644	* 1.4370	* 1.4489	* 1.4012	* 1.3080	* .6405	*
	* 1.5092	* 1.3358	* 1.2735	* 1.2658	* 1.3145	* 1.4119	* 2.8555	*
14	* 1.1585	* 1.3264	* 1.3275	* 1.3232	* .8615	* .6416	*	*
	* 1.5692	* 1.3796	* 1.3790	* 1.3871	* 2.1279	* 2.8572	*	*
15	* .6426	* .7803	* .6708	* .6015	* F-SUB-Q			
	* 2.8172	* 2.3273	* 2.7107	* 3.0277	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9179	* 1.2322	* 1.1910	* 1.0425	* 1.1509	* 1.0685	* 1.0273	* .5700
	* 1.8820	* 1.4089	* 1.4636	* 1.6838	* 1.5230	* 1.6472	* 1.7115	* 3.0822
9	* 1.2322	* 1.2311	* 1.0956	* 1.1379	* 1.1086	* 1.2105	* 1.1487	* .6816
	* 1.4089	* 1.4113	* 1.5924	* 1.5366	* 1.5911	* 1.4553	* 1.5388	* 2.5823
10	* 1.1910	* 1.0945	* 1.1379	* 1.0447	* 1.2398	* 1.2636	* 1.1444	* .5852
	* 1.4636	* 1.5940	* 1.5354	* 1.6883	* 1.4240	* 1.3979	* 1.5464	* 3.0130
11	* 1.0425	* 1.1401	* 1.0447	* 1.1541	* 1.1476	* 1.2798	* 1.1411	* .5234
	* 1.6838	* 1.5344	* 1.6892	* 1.5292	* 1.5420	* 1.3831	* 1.5548	* 3.3732
12	* 1.1509	* 1.1075	* 1.2387	* 1.1476	* 1.2755	* 1.2278	* .7608	*
	* 1.5230	* 1.5919	* 1.4252	* 1.5420	* 1.3882	* 1.4477	* 2.3270	*
13	* 1.0685	* 1.2083	* 1.2647	* 1.2798	* 1.2289	* 1.1336	* .5646	*
	* 1.6472	* 1.4578	* 1.3968	* 1.3825	* 1.4470	* 1.5711	* 3.1355	*
14	* 1.0273	* 1.1487	* 1.1444	* 1.1411	* .7618	* .5657	*	*
	* 1.7115	* 1.5388	* 1.5464	* 1.5540	* 2.3252	* 3.1377	*	*
15	* .5700	* .6827	* .5852	* .5234	* F-SUB-Q			
	* 3.0822	* 2.5760	* 3.0101	* 3.3696	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 204 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7358 *	* .9049 *	* .8876 *	* .8507 *	* .9341 *	* .8518 *	* .8084 *	* .4562 *
	* 2.2909 *	* 1.8730 *	* 1.9107 *	* 2.0049 *	* 1.8271 *	* 2.0115 *	* 2.1229 *	* 3.7607 *
9	* .9049 *	* .9092 *	* .8626 *	* .8767 *	* .8713 *	* .9190 *	* .8876 *	* .5245 *
	* 1.8730 *	* 1.8614 *	* 1.9700 *	* 1.9411 *	* 1.9701 *	* 1.8660 *	* 1.9393 *	* 3.2721 *
10	* .8876 *	* .8615 *	* .8800 *	* .8442 *	* .9201 *	* .9233 *	* .8680 *	* .4573 *
	* 1.9107 *	* 1.9712 *	* 1.9311 *	* 2.0323 *	* 1.8663 *	* 1.8608 *	* 1.9847 *	* 3.7607 *
11	* .8507 *	* .8778 *	* .8431 *	* .8832 *	* .9038 *	* .9959 *	* .8724 *	* .4140 *
	* 2.0049 *	* 1.9367 *	* 2.0314 *	* 1.9420 *	* 1.9096 *	* 1.7309 *	* 1.9801 *	* 4.1603 *
12	* .9341 *	* .8702 *	* .9190 *	* .9038 *	* 1.0219 *	* .9699 *	* .6090 *	
	* 1.8271 *	* 1.9722 *	* 1.8675 *	* 1.9104 *	* 1.6861 *	* 1.7807 *	* 2.8294 *	
13	* .8518 *	* .9179 *	* .9244 *	* .9970 *	* .9710 *	* .8713 *	* .4508 *	
	* 2.0115 *	* 1.8682 *	* 1.8590 *	* 1.7299 *	* 1.7807 *	* 1.9889 *	* 3.8342 *	
14	* .8084 *	* .8876 *	* .8691 *	* .8724 *	* .6101 *	* .4508 *		
	* 2.1229 *	* 1.9393 *	* 1.9847 *	* 1.9789 *	* 2.8311 *	* 3.8263 *		
15	* .4562 *	* .5256 *	* .4584 *	* .4140 *	F-SUB-Q			
	* 3.7607 *	* 3.2710 *	* 3.7562 *	* 4.1641 *	M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .4779 *	* .3760 *	* .3912 *	* .4356 *	* .4064 *	* .4281 *	* .3620 *	* .2211 *
	* 3.4582 *	* 4.3953 *	* 4.2272 *	* 3.8106 *	* 4.0821 *	* 3.8880 *	* 4.6160 *	* 7.5885 *
9	* .3760 *	* .3977 *	* .4291 *	* .3999 *	* .4356 *	* .3999 *	* .3782 *	* .2352 *
	* 4.3953 *	* 4.1524 *	* 3.8542 *	* 4.1544 *	* 3.8074 *	* 4.1693 *	* 4.4310 *	* 7.1384 *
10	* .3912 *	* .4291 *	* .3945 *	* .4302 *	* .3956 *	* .3815 *	* .3717 *	* .2319 *
	* 4.2272 *	* 3.8495 *	* 4.1950 *	* 3.8670 *	* 4.2102 *	* 4.3914 *	* 4.5054 *	* 7.2372 *
11	* .4356 *	* .3999 *	* .4302 *	* .4118 *	* .4508 *	* .4172 *	* .3555 *	* .2027 *
	* 3.8106 *	* 4.1452 *	* 3.8703 *	* 4.0662 *	* 3.7142 *	* 4.0158 *	* 4.7251 *	* 8.2767 *
12	* .4064 *	* .4356 *	* .3956 *	* .4508 *	* .4291 *	* .4172 *	* .3034 *	
	* 4.0821 *	* 3.8106 *	* 4.2102 *	* 3.7142 *	* 3.9073 *	* 4.0245 *	* 5.5452 *	
13	* .4281 *	* .3999 *	* .3825 *	* .4172 *	* .4172 *	* .3652 *	* .2232 *	
	* 3.8880 *	* 4.1693 *	* 4.3914 *	* 4.0194 *	* 4.0245 *	* 4.6113 *	* 7.5270 *	
14	* .3620 *	* .3782 *	* .3728 *	* .3555 *	* .3034 *	* .2232 *		
	* 4.6160 *	* 4.4310 *	* 4.5054 *	* 4.7300 *	* 5.5452 *	* 7.5270 *		
15	* .2211 *	* .2352 *	* .2319 *	* .2027 *	F-SUB-Q			
	* 7.5885 *	* 7.1222 *	* 7.2372 *	* 8.2767 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 205 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7196 *	* .5917 *	* .5776 *	* .5744 *	* .5375 *	* .5484 *	* .4855 *	* .3143 *
	* 3.3526 *	* 4.2915 *	* 4.5317 *	* 4.1937 *	* 4.5083 *	* 4.2140 *	* 4.8757 *	* 7.4244 *
9	* .5917 *	* .5950 *	* .6090 *	* .5505 *	* .5646 *	* .5353 *	* .4963 *	* .3316 *
	* 4.2915 *	* 4.3201 *	* 4.1572 *	* 4.5452 *	* 4.1854 *	* 4.5217 *	* 4.6874 *	* 7.0900 *
10	* .5776 *	* .6090 *	* .5646 *	* .5581 *	* .5353 *	* .5245 *	* .4920 *	* .3251 *
	* 4.5317 *	* 4.1531 *	* 4.5547 *	* 4.3684 *	* 4.6698 *	* 4.7705 *	* 4.8301 *	* 7.3263 *
11	* .5744 *	* .5505 *	* .5592 *	* .5213 *	* .5386 *	* .5137 *	* .4508 *	* .2807 *
	* 4.1937 *	* 4.5452 *	* 4.3640 *	* 4.9307 *	* 4.6335 *	* 5.0214 *	* 5.5762 *	* 8.8515 *
12	* .5375 *	* .5646 *	* .5353 *	* .5386 *	* .4714 *	* .4541 *	* .3825 *	
	* 4.5083 *	* 4.1854 *	* 4.6604 *	* 4.6335 *	* 4.9050 *	* 5.0237 *	* 6.6206 *	
13	* .5484 *	* .5353 *	* .5245 *	* .5137 *	* .4541 *	* .3923 *	* .2763 *	
	* 4.2140 *	* 4.5217 *	* 4.7705 *	* 5.0214 *	* 5.0237 *	* 5.7031 *	* 8.8615 *	
14	* .4855 *	* .4963 *	* .4931 *	* .4508 *	* .3825 *	* .2763 *		
	* 4.8757 *	* 4.6874 *	* 4.8301 *	* 5.5823 *	* 6.6206 *	* 8.8615 *		
15	* .3143 *	* .3316 *	* .3251 *	* .2807 *	F-SUB-Q			
	* 7.4244 *	* 7.0684 *	* 7.3371 *	* 8.8666 *	M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0609 *	* 1.4641 *	* 1.3795 *	* 1.0653 *	* 1.1812 *	* 1.0382 *	* 1.0523 *	* .6275 *
	* 2.3335 *	* 1.8339 *	* 2.0153 *	* 2.4034 *	* 2.1546 *	* 2.3560 *	* 2.3528 *	* 3.9005 *
9	* 1.4641 *	* 1.4684 *	* 1.1953 *	* 1.2246 *	* 1.0891 *	* 1.2636 *	* 1.1021 *	* .7304 *
	* 1.8339 *	* 1.8561 *	* 2.2619 *	* 2.1392 *	* 2.3107 *	* 2.0362 *	* 2.2235 *	* 3.3686 *
10	* 1.3795 *	* 1.1942 *	* 1.2398 *	* 1.0317 *	* 1.2777 *	* 1.2864 *	* 1.0913 *	* .6188 *
	* 2.0153 *	* 2.2630 *	* 2.1610 *	* 2.4850 *	* 2.0723 *	* 2.0420 *	* 2.2885 *	* 4.0538 *
11	* 1.0653 *	* 1.2257 *	* 1.0338 *	* 1.1585 *	* 1.0729 *	* 1.2267 *	* 1.0447 *	* .5505 *
	* 2.4034 *	* 2.1371 *	* 2.4794 *	* 2.3517 *	* 2.4759 *	* 2.2237 *	* 2.5367 *	* 4.7279 *
12	* 1.1812 *	* 1.0891 *	* 1.2777 *	* 1.0729 *	* 1.0631 *	* 1.0490 *	* .7488 *	
	* 2.1546 *	* 2.3130 *	* 2.0732 *	* 2.4759 *	* 2.2352 *	* 2.3848 *	* 3.5655 *	
13	* 1.0382 *	* 1.2625 *	* 1.2864 *	* 1.2278 *	* 1.0501 *	* .9341 *	* .5484 *	
	* 2.3560 *	* 2.0371 *	* 2.0420 *	* 2.2226 *	* 2.3848 *	* 2.6238 *	* 4.7219 *	
14	* 1.0523 *	* 1.1021 *	* 1.0913 *	* 1.0447 *	* .7488 *	* .5484 *		
	* 2.3528 *	* 2.2235 *	* 2.2896 *	* 2.5379 *	* 3.5630 *	* 4.7175 *		
15	* .6275 *	* .7315 *	* .6188 *	* .5516 *	F-SUB-Q			
	* 3.9005 *	* 3.3612 *	* 4.0570 *	* 4.7279 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 206 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3969	* 1.8499	* 1.7166	* 1.3330	* 1.4500	* 1.3080	* 1.3124	* .7716 *
	* 2.0007	* 1.5297	* 1.6781	* 1.9890	* 1.8162	* 1.9350	* 1.9555	* 3.2863 *
9	* 1.8499	* 1.8412	* 1.5096	* 1.5128	* 1.3828	* 1.5790	* 1.4131	* .9157 *
	* 1.5297	* 1.5475	* 1.8543	* 1.7957	* 1.8808	* 1.6841	* 1.7961	* 2.7818 *
10	* 1.7166	* 1.5074	* 1.5302	* 1.2907	* 1.6017	* 1.6212	* 1.4056	* .7673 *
	* 1.6781	* 1.8559	* 1.8133	* 2.0530	* 1.7086	* 1.6730	* 1.8332	* 3.4008 *
11	* 1.3330	* 1.5139	* 1.2939	* 1.4435	* 1.3785	* 1.5551	* 1.3579	* .6849 *
	* 1.9890	* 1.7943	* 2.0520	* 1.9573	* 2.0007	* 1.8237	* 2.0195	* 3.9374 *
12	* 1.4500	* 1.3817	* 1.6006	* 1.3795	* 1.4782	* 1.3882	* .9331	* .9331 *
	* 1.8162	* 1.8808	* 1.7105	* 2.0005	* 1.8480	* 1.9180	* 2.9801	* .9331 *
13	* 1.3080	* 1.5779	* 1.6212	* 1.5562	* 1.3882	* 1.2538	* .6871	* .6871 *
	* 1.9350	* 1.6842	* 1.6730	* 1.8229	* 1.9171	* 2.0838	* 3.9451	* .6871 *
14	* 1.3124	* 1.4131	* 1.4056	* 1.3590	* .9331	* .6871	* .6871	* .6871 *
	* 1.9555	* 1.7967	* 1.8338	* 2.0186	* 2.9799	* 3.9420	* 3.9420	* .6871 *
15	* .7716	* .9179	* .7683	* .6849	* F-SUB-Q			
	* 3.2863	* 2.7783	* 3.3960	* 3.9374	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.5378	* 2.0623	* 1.9236	* 1.5356	* 1.6516	* 1.5172	* 1.4955	* .8659 *
	* 1.9036	* 1.4339	* 1.5470	* 1.7757	* 1.6482	* 1.7176	* 1.7706	* 3.0265 *
9	* 2.0623	* 2.0514	* 1.7242	* 1.7144	* 1.5974	* 1.7881	* 1.6494	* 1.0414 *
	* 1.4339	* 1.4471	* 1.6837	* 1.6375	* 1.6788	* 1.5337	* 1.5861	* 2.5274 *
10	* 1.9236	* 1.7231	* 1.7328	* 1.4933	* 1.8152	* 1.8423	* 1.6429	* .8735 *
	* 1.5470	* 1.6857	* 1.6586	* 1.8299	* 1.5591	* 1.5253	* 1.6178	* 3.0905 *
11	* 1.5356	* 1.7155	* 1.4955	* 1.6537	* 1.6071	* 1.7903	* 1.5974	* .7824 *
	* 1.7757	* 1.6352	* 1.8292	* 1.7790	* 1.7815	* 1.6478	* 1.7763	* 3.5740 *
12	* 1.6516	* 1.5974	* 1.8141	* 1.6082	* 1.7285	* 1.6483	* 1.0707	* .7911 *
	* 1.6482	* 1.6794	* 1.5601	* 1.7815	* 1.6598	* 1.6889	* 2.7100	* .7911 *
13	* 1.5172	* 1.7870	* 1.8423	* 1.7903	* 1.6483	* 1.5096	* .7911	* .7911 *
	* 1.7176	* 1.5357	* 1.5253	* 1.6472	* 1.6889	* 1.8148	* 3.5817	* .7911 *
14	* 1.4955	* 1.6494	* 1.6429	* 1.5974	* 1.0707	* .7911	* .7911	* .7911 *
	* 1.7706	* 1.5861	* 1.6167	* 1.7756	* 2.7086	* 3.5792	* 3.5792	* .7911 *
15	* .8659	* 1.0436	* .8735	* .7835	* F-SUB-Q			
	* 3.0265	* 2.5231	* 3.0905	* 3.5688	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 207 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.5692	* 2.1175	* 1.9929	* 1.6266	* 1.7426	* 1.6190	* 1.5800	* .9049
	* 1.9559	* 1.4622	* 1.5509	* 1.7340	* 1.6270	* 1.6737	* 1.7433	* 3.0168
9	* 2.1175	* 2.1100	* 1.8076	* 1.7989	* 1.6982	* 1.8781	* 1.7621	* 1.0935
	* 1.4622	* 1.4740	* 1.6692	* 1.6230	* 1.6415	* 1.5206	* 1.5420	* 2.5039
10	* 1.9929	* 1.8054	* 1.8152	* 1.5887	* 1.9084	* 1.9398	* 1.7578	* .9211
	* 1.5509	* 1.6698	* 1.6454	* 1.7885	* 1.5469	* 1.5117	* 1.5710	* 3.0526
11	* 1.6266	* 1.8011	* 1.5898	* 1.7523	* 1.7187	* 1.8997	* 1.7166	* .8279
	* 1.7340	* 1.6208	* 1.7877	* 1.7588	* 1.7408	* 1.6243	* 1.7132	* 3.5080
12	* 1.7426	* 1.6971	* 1.9073	* 1.7187	* 1.8499	* 1.7805	* 1.1357	*
	* 1.6270	* 1.6421	* 1.5480	* 1.7408	* 1.6266	* 1.6348	* 2.6761	*
13	* 1.6190	* 1.8770	* 1.9398	* 1.8997	* 1.7816	* 1.6440	* .8420	*
	* 1.6737	* 1.5224	* 1.5117	* 1.6237	* 1.6342	* 1.7465	* 3.5355	*
14	* 1.5800	* 1.7632	* 1.7578	* 1.7166	* 1.1357	* .8420	*	*
	* 1.7433	* 1.5420	* 1.5699	* 1.7125	* 2.6747	* 3.5330	*	*
15	* .9049	* 1.0967	* .9211	* .8279	* F-SUB-Q			
	* 3.0168	* 2.4997	* 3.0505	* 3.5052	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.5692	* 2.1186	* 2.0070	* 1.6613	* 1.7838	* 1.6656	* 1.6180	* .9211
	* 2.0575	* 1.5354	* 1.6126	* 1.7615	* 1.6601	* 1.6946	* 1.7775	* 3.0926
9	* 2.1186	* 2.1121	* 1.8304	* 1.8304	* 1.7426	* 1.9171	* 1.8152	* 1.1162
	* 1.5354	* 1.5450	* 1.7235	* 1.6668	* 1.6675	* 1.5555	* 1.5598	* 2.5624
10	* 2.0070	* 1.8282	* 1.8445	* 1.6321	* 1.9507	* 1.9843	* 1.8109	* .9417
	* 1.6126	* 1.7235	* 1.6961	* 1.8194	* 1.5849	* 1.5476	* 1.5882	* 3.1159
11	* 1.6613	* 1.8325	* 1.6321	* 1.7979	* 1.7708	* 1.9517	* 1.7740	* .8496
	* 1.7615	* 1.6643	* 1.8186	* 1.8005	* 1.7652	* 1.6558	* 1.7337	* 3.5828
12	* 1.7838	* 1.7426	* 1.9496	* 1.7718	* 1.9106	* 1.8488	* 1.1682	*
	* 1.6601	* 1.6682	* 1.5860	* 1.7652	* 1.6610	* 1.6586	* 2.7405	*
13	* 1.6656	* 1.9149	* 1.9843	* 1.9528	* 1.8488	* 1.7133	* .8670	*
	* 1.6946	* 1.5566	* 1.5476	* 1.6552	* 1.6581	* 1.7691	* 3.6314	*
14	* 1.6180	* 1.8152	* 1.8109	* 1.7751	* 1.1682	* .8680	*	*
	* 1.7775	* 1.5598	* 1.5870	* 1.7330	* 2.7388	* 3.6314	*	*
15	* .9211	* 1.1184	* .9428	* .8496	* F-SUB-Q			
	* 3.0926	* 2.5580	* 3.1118	* 3.5773	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 208 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.5670	* 2.1219	* 2.0200	* 1.6852	* 1.8184	* 1.7003	* 1.6526	* .9374
	* 2.1723	* 1.6105	* 1.6902	* 1.8255	* 1.7224	* 1.7513	* 1.8379	* 3.2075
9	* 2.1219	* 2.1165	* 1.8445	* 1.8575	* 1.7784	* 1.9528	* 1.8575	* 1.1357
	* 1.6105	* 1.6163	* 1.7887	* 1.7335	* 1.7266	* 1.6159	* 1.6089	* 2.6589
10	* 2.0200	* 1.8423	* 1.8694	* 1.6656	* 1.9886	* 2.0254	* 1.8542	* .9612
	* 1.6902	* 1.7909	* 1.7684	* 1.8859	* 1.6486	* 1.6080	* 1.6383	* 3.2280
11	* 1.6852	* 1.8596	* 1.6646	* 1.8358	* 1.8130	* 1.9994	* 1.8206	* .8680
	* 1.8255	* 1.7315	* 1.8851	* 1.8631	* 1.8043	* 1.6967	* 1.7873	* 3.7160
12	* 1.8184	* 1.7773	* 1.9875	* 1.8130	* 1.9615	* 1.9019	* 1.1964	*
	* 1.7224	* 1.7279	* 1.6504	* 1.8043	* 1.7083	* 1.6993	* 2.8282	*
13	* 1.7003	* 1.9507	* 2.0254	* 2.0005	* 1.9019	* 1.7686	* .8897	*
	* 1.7513	* 1.6176	* 1.6080	* 1.6961	* 1.6986	* 1.8096	* 3.7487	*
14	* 1.6526	* 1.8575	* 1.8542	* 1.8217	* 1.1975	* .8897	*	*
	* 1.8379	* 1.6089	* 1.6371	* 1.7858	* 2.8264	* 3.7456	*	*
15	* .9374	* 1.1379	* .9623	* .8680	* F-SUB-Q			
	* 3.2075	* 2.6512	* 3.2301	* 3.7160	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.5302	* 2.0796	* 1.9886	* 1.6776	* 1.8109	* 1.7036	* 1.6461	* .9298
	* 2.3436	* 1.7344	* 1.8266	* 1.9643	* 1.8543	* 1.8765	* 1.9723	* 3.4576
9	* 2.0796	* 2.0764	* 1.8260	* 1.8412	* 1.7794	* 1.9431	* 1.8640	* 1.1292
	* 1.7344	* 1.7410	* 1.9189	* 1.8729	* 1.8516	* 1.7365	* 1.7185	* 2.8528
10	* 1.9886	* 1.8239	* 1.8510	* 1.6678	* 1.9810	* 2.0189	* 1.8618	* .9580
	* 1.8266	* 1.9206	* 1.9158	* 2.0299	* 1.7739	* 1.7269	* 1.7470	* 3.4452
11	* 1.6776	* 1.8445	* 1.6678	* 1.8304	* 1.8195	* 1.9994	* 1.8325	* .8648
	* 1.9643	* 1.8713	* 2.0289	* 1.9649	* 1.9032	* 1.7894	* 1.8829	* 3.9564
12	* 1.8109	* 1.7794	* 1.9788	* 1.8206	* 1.9669	* 1.9171	* 1.1975	*
	* 1.8543	* 1.8524	* 1.7760	* 1.9032	* 1.8036	* 1.7918	* 2.9794	*
13	* 1.7036	* 1.9409	* 2.0189	* 2.0005	* 1.9181	* 1.7870	* .8919	*
	* 1.8765	* 1.7385	* 1.7269	* 1.7887	* 1.7918	* 1.9140	* 3.9778	*
14	* 1.6461	* 1.8640	* 1.8618	* 1.8336	* 1.1986	* .8919	*	*
	* 1.9723	* 1.7185	* 1.7476	* 1.8821	* 2.9774	* 3.9778	*	*
15	* .9298	* 1.1314	* .9591	* .8659	* F-SUB-Q			
	* 3.4576	* 2.8474	* 3.4426	* 3.9530	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 209 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.5053	* 2.0471	* 1.9626	* 1.6656	* 1.8033	* 1.7003	* 1.6418	* .9244
	* 2.5845	* 1.9057	* 1.9830	* 2.1212	* 1.9866	* 2.0232	* 2.1029	* 3.6884
9	* 2.0471	* 2.0439	* 1.8054	* 1.8271	* 1.7762	* 1.9355	* 1.8629	* 1.1238
	* 1.9057	* 1.9104	* 2.0993	* 2.0134	* 2.0019	* 1.8625	* 1.8491	* 3.0464
10	* 1.9626	* 1.8033	* 1.8347	* 1.6646	* 1.9745	* 2.0135	* 1.8618	* .9558
	* 1.9830	* 2.1012	* 2.0766	* 2.1968	* 1.9092	* 1.8573	* 1.8832	* 3.6887
11	* 1.6656	* 1.8293	* 1.6635	* 1.8250	* 1.8206	* 2.0005	* 1.8358	* .8626
	* 2.1212	* 2.0116	* 2.1957	* 2.1210	* 2.0649	* 1.9249	* 2.0366	* 4.2317
12	* 1.8033	* 1.7751	* 1.9723	* 1.8206	* 1.9702	* 1.9236	* 1.1986	*
	* 1.9866	* 2.0036	* 1.9116	* 2.0649	* 1.9427	* 1.9353	* 3.1970	*
13	* 1.7003	* 1.9322	* 2.0146	* 2.0016	* 1.9236	* 1.7968	* .8919	*
	* 2.0232	* 1.8647	* 1.8573	* 1.9241	* 1.9353	* 2.0592	* 4.2559	*
14	* 1.6418	* 1.8629	* 1.8618	* 1.8369	* 1.1986	* .8930	*	*
	* 2.1029	* 1.8498	* 1.8824	* 2.0356	* 3.1970	* 4.2559	*	*
15	* .9244	* 1.1260	* .9558	* .8637	* F-SUB-Q			
	* 3.6884	* 3.0403	* 3.6857	* 4.2317	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.4554	* 1.9756	* 1.8976	* 1.6147	* 1.7567	* 1.6559	* 1.6028	* .9016
	* 2.9182	* 2.1482	* 2.2286	* 2.3762	* 2.1959	* 2.2545	* 2.3253	* 4.0678
9	* 1.9756	* 1.9734	* 1.7448	* 1.7740	* 1.7296	* 1.8867	* 1.8163	* 1.0945
	* 2.1482	* 2.1492	* 2.3788	* 2.2412	* 2.2295	* 2.0533	* 2.0578	* 3.3590
10	* 1.8976	* 1.7437	* 1.7794	* 1.6212	* 1.9257	* 1.9669	* 1.8152	* .9331
	* 2.2286	* 2.3801	* 2.3256	* 2.4609	* 2.1099	* 2.0479	* 2.0891	* 4.0297
11	* 1.6147	* 1.7762	* 1.6201	* 1.7816	* 1.7762	* 1.9572	* 1.7935	* .8431
	* 2.3762	* 2.2390	* 2.4609	* 2.3732	* 2.3143	* 2.1382	* 2.2710	* 4.6213
12	* 1.7567	* 1.7296	* 1.9247	* 1.7773	* 1.9279	* 1.8824	* 1.1726	*
	* 2.1959	* 2.2306	* 2.1109	* 2.3143	* 2.1802	* 2.1835	* 3.5732	*
13	* 1.6559	* 1.8846	* 1.9680	* 1.9582	* 1.8824	* 1.7578	* .8724	*
	* 2.2545	* 2.0559	* 2.0479	* 2.1373	* 2.1835	* 2.3208	* 4.7497	*
14	* 1.6028	* 1.8163	* 1.8163	* 1.7946	* 1.1726	* .8735	*	*
	* 2.3253	* 2.0578	* 2.0891	* 2.2699	* 3.5705	* 4.7447	*	*
15	* .9016	* 1.0967	* .9331	* .8431	* F-SUB-Q			
	* 4.0678	* 3.3517	* 4.0297	* 4.6213	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 210 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.4218	* 1.9355	* 1.8640	* 1.6006	* 1.7393	* 1.6483	* 1.5876	* .8897
	* 3.1888	* 2.3451	* 2.4294	* 2.5935	* 2.3876	* 2.4523	* 2.5095	* 4.3945
9	* 1.9355	* 1.9344	* 1.7231	* 1.7502	* 1.7209	* 1.8672	* 1.8109	* 1.0826
	* 2.3451	* 2.3451	* 2.6000	* 2.4398	* 2.4382	* 2.2333	* 2.2335	* 3.6230
10	* 1.8640	* 1.7209	* 1.7556	* 1.6125	* 1.9073	* 1.9507	* 1.8119	* .9244
	* 2.4294	* 2.6014	* 2.5445	* 2.6888	* 2.3046	* 2.2365	* 2.2743	* 4.3708
11	* 1.6006	* 1.7534	* 1.6115	* 1.7643	* 1.7708	* 1.9474	* 1.7924	* .8344
	* 2.5935	* 2.4372	* 2.6902	* 2.5900	* 2.5426	* 2.3415	* 2.4780	* 5.0230
12	* 1.7393	* 1.7198	* 1.9062	* 1.7708	* 1.9203	* 1.8824	* 1.1650	*
	* 2.3876	* 2.4395	* 2.3081	* 2.5426	* 2.3871	* 2.4046	* 3.9275	*
13	* 1.6483	* 1.8650	* 1.9507	* 1.9485	* 1.8824	* 1.7621	* .8680	*
	* 2.4523	* 2.2364	* 2.2365	* 2.3404	* 2.4033	* 2.5738	* 5.2587	*
14	* 1.5876	* 1.8119	* 1.8119	* 1.7935	* 1.1661	* .8680	*	*
	* 2.5095	* 2.2315	* 2.2743	* 2.4766	* 3.9242	* 5.2587	*	*
15	* .8897	* 1.0848	* .9244	* .8344	* F-SUB-Q			
	* 4.3945	* 3.6146	* 4.3744	* 5.0277	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3752	* 1.8737	* 1.8076	* 1.5638	* 1.6992	* 1.6136	* 1.5519	* .8680
	* 3.3558	* 2.4653	* 2.5525	* 2.7538	* 2.5250	* 2.6209	* 2.6854	* 4.7580
9	* 1.8737	* 1.8737	* 1.6754	* 1.7047	* 1.6841	* 1.8239	* 1.7751	* 1.0566
	* 2.4653	* 2.4653	* 2.7457	* 2.5763	* 2.6165	* 2.3948	* 2.4101	* 3.9457
10	* 1.8076	* 1.6732	* 1.7079	* 1.5779	* 1.8640	* 1.9073	* 1.7762	* .9027
	* 2.5525	* 2.7473	* 2.6747	* 2.8705	* 2.4653	* 2.3985	* 2.4634	* 4.7823
11	* 1.5638	* 1.7068	* 1.5768	* 1.7242	* 1.7372	* 1.9095	* 1.7610	* .8160
	* 2.7538	* 2.5735	* 2.8687	* 2.6993	* 2.6597	* 2.4308	* 2.6224	* 5.5520
12	* 1.6992	* 1.6830	* 1.8618	* 1.7372	* 1.8846	* 1.8510	* 1.1422	*
	* 2.5250	* 2.6180	* 2.4692	* 2.6597	* 2.4822	* 2.5165	* 4.0830	*
13	* 1.6136	* 1.8217	* 1.9084	* 1.9095	* 1.8510	* 1.7339	* .8507	*
	* 2.6209	* 2.3960	* 2.3985	* 2.4295	* 2.5151	* 2.6966	* 5.5063	*
14	* 1.5519	* 1.7762	* 1.7773	* 1.7610	* 1.1422	* .8518	*	*
	* 2.6854	* 2.4101	* 2.4634	* 2.6209	* 4.0830	* 5.4999	*	*
15	* .8680	* 1.0588	* .9038	* .8160	* F-SUB-Q			
	* 4.7580	* 3.9357	* 4.7823	* 5.5454	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 211 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3221	* 1.7989	* 1.7372	* 1.5085	* 1.6407	* 1.5594	* 1.5020	* .8388
	* 3.5384	* 2.5958	* 2.6815	* 2.8333	* 2.5858	* 2.6954	* 2.7473	* 4.8667
9	* 1.7989	* 1.7979	* 1.6093	* 1.6429	* 1.6277	* 1.7632	* 1.7177	* 1.0208
	* 2.5958	* 2.6001	* 2.8943	* 2.6409	* 2.6907	* 2.4511	* 2.4769	* 4.0430
10	* 1.7372	* 1.6082	* 1.6451	* 1.5248	* 1.8022	* 1.8466	* 1.7187	* .8735
	* 2.6815	* 2.8979	* 2.7409	* 2.9542	* 2.5247	* 2.4562	* 2.5315	* 4.8971
11	* 1.5085	* 1.6451	* 1.5237	* 1.6667	* 1.6819	* 1.8510	* 1.7057	* .7889
	* 2.8333	* 2.6380	* 2.9524	* 2.8265	* 2.7880	* 2.5384	* 2.7441	* 5.6837
12	* 1.6407	* 1.6266	* 1.8011	* 1.6819	* 1.8260	* 1.7946	* 1.1065	*
	* 2.5858	* 2.6923	* 2.5274	* 2.7880	* 2.6073	* 2.6469	* 4.2666	*
13	* 1.5594	* 1.7610	* 1.8477	* 1.8510	* 1.7957	* 1.6819	* .8247	*
	* 2.6954	* 2.4524	* 2.4562	* 2.5370	* 2.6454	* 2.8419	* 5.7673	*
14	* 1.5020	* 1.7177	* 1.7198	* 1.7057	* 1.1075	* .8247	*	*
	* 2.7473	* 2.4769	* 2.5302	* 2.7425	* 4.2628	* 5.7602	*	*
15	* .8388	* 1.0230	* .8735	* .7889	* F-SUB-Q			
	* 4.8667	* 4.0327	* 4.8971	* 5.6837	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2907	* 1.7621	* 1.7025	* 1.4858	* 1.6158	* 1.5378	* 1.4793	* .8247
	* 3.4021	* 2.4813	* 2.5584	* 2.7765	* 2.5384	* 2.6424	* 2.6954	* 4.7681
9	* 1.7621	* 1.7610	* 1.5790	* 1.6136	* 1.6060	* 1.7372	* 1.6982	* 1.0046
	* 2.4813	* 2.4892	* 2.7546	* 2.5943	* 2.6439	* 2.4122	* 2.4283	* 3.9580
10	* 1.7025	* 1.5779	* 1.6147	* 1.5031	* 1.7773	* 1.8228	* 1.7003	* .8605
	* 2.5584	* 2.7545	* 2.6807	* 2.8979	* 2.4617	* 2.4039	* 2.4834	* 4.7973
11	* 1.4858	* 1.6158	* 1.5020	* 1.6429	* 1.6613	* 1.8293	* 1.6884	* .7770
	* 2.7765	* 2.5915	* 2.8961	* 2.6785	* 2.6427	* 2.4097	* 2.5918	* 5.5110
12	* 1.6158	* 1.6050	* 1.7751	* 1.6613	* 1.8065	* 1.7784	* 1.0935	*
	* 2.5384	* 2.6454	* 2.4643	* 2.6427	* 2.4727	* 2.4949	* 4.0068	*
13	* 1.5378	* 1.7350	* 1.8239	* 1.8304	* 1.7784	* 1.6689	* .8149	*
	* 2.6424	* 2.4134	* 2.4027	* 2.4085	* 2.4963	* 2.6642	* 5.3767	*
14	* 1.4793	* 1.6982	* 1.7003	* 1.6895	* 1.0945	* .8149	*	*
	* 2.6954	* 2.4283	* 2.4821	* 2.5903	* 4.0034	* 5.3640	*	*
15	* .8247	* 1.0068	* .8605	* .7781	* F-SUB-Q			
	* 4.7681	* 3.9481	* 4.7924	* 5.5110	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 212 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2398	* 1.6992	* 1.6429	* 1.4424	* 1.5659	* 1.4955	* 1.4348	* .7976
	* 3.1731	* 2.3133	* 2.3839	* 2.5614	* 2.3500	* 2.4461	* 2.5063	* 4.4465
9	* 1.6992	* 1.6971	* 1.5291	* 1.5605	* 1.5616	* 1.6841	* 1.6537	* .9732
	* 2.3133	* 2.3213	* 2.5591	* 2.3989	* 2.4392	* 2.2372	* 2.2470	* 3.6852
10	* 1.6429	* 1.5280	* 1.5616	* 1.4608	* 1.7242	* 1.7697	* 1.6570	* .8344
	* 2.3839	* 2.5634	* 2.4793	* 2.6658	* 2.2908	* 2.2341	* 2.2906	* 4.4322
11	* 1.4424	* 1.5627	* 1.4597	* 1.5930	* 1.6180	* 1.7794	* 1.6472	* .7532
	* 2.5614	* 2.3965	* 2.6643	* 2.4894	* 2.4470	* 2.2328	* 2.3996	* 5.1231
12	* 1.5659	* 1.5605	* 1.7220	* 1.6180	* 1.7588	* 1.7361	* 1.0631	*
	* 2.3500	* 2.4405	* 2.2930	* 2.4470	* 2.2933	* 2.3115	* 3.7239	*
13	* 1.4955	* 1.6819	* 1.7697	* 1.7805	* 1.7361	* 1.6310	* .7922	*
	* 2.4461	* 2.2406	* 2.2331	* 2.2317	* 2.3103	* 2.4665	* 5.0007	*
14	* 1.4348	* 1.6537	* 1.6570	* 1.6483	* 1.0631	* .7922	*	*
	* 2.5063	* 2.2470	* 2.2881	* 2.3984	* 3.7239	* 5.0065	*	*
15	* .7976	* .9753	* .8344	* .7543	* F-SUB-Q			
	* 4.4465	* 3.6737	* 4.4280	* 5.1299	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1888	* 1.6299	* 1.5768	* 1.3904	* 1.5074	* 1.4413	* 1.3817	* .7662
	* 2.9820	* 2.1712	* 2.2384	* 2.3790	* 2.1848	* 2.2722	* 2.3361	* 4.1543
9	* 1.6299	* 1.6277	* 1.4695	* 1.4998	* 1.5053	* 1.6212	* 1.5952	* .9363
	* 2.1712	* 2.1782	* 2.4024	* 2.2291	* 2.2608	* 2.0783	* 2.0847	* 3.4419
10	* 1.5768	* 1.4684	* 1.5009	* 1.4088	* 1.6602	* 1.7057	* 1.5995	* .8030
	* 2.2384	* 2.4023	* 2.2974	* 2.4704	* 2.1277	* 2.0751	* 2.1213	* 4.1272
11	* 1.3904	* 1.5020	* 1.4066	* 1.5345	* 1.5627	* 1.7177	* 1.5920	* .7250
	* 2.3790	* 2.2259	* 2.4691	* 2.3437	* 2.2980	* 2.0986	* 2.2514	* 4.7555
12	* 1.5074	* 1.5042	* 1.6591	* 1.5627	* 1.6982	* 1.6787	* 1.0252	*
	* 2.1848	* 2.2619	* 2.1305	* 2.2980	* 2.1550	* 2.1701	* 3.5074	*
13	* 1.4413	* 1.6190	* 1.7068	* 1.7187	* 1.6787	* 1.5779	* .7629	*
	* 2.2722	* 2.0801	* 2.0751	* 2.0977	* 2.1680	* 2.3178	* 4.7218	*
14	* 1.3817	* 1.5963	* 1.5995	* 1.5930	* 1.0252	* .7640	*	*
	* 2.3361	* 2.0858	* 2.1213	* 2.2504	* 3.5048	* 4.7120	*	*
15	* .7662	* .9385	* .8030	* .7250	* F-SUB-Q			
	* 4.1543	* 3.4318	* 4.1316	* 4.7613	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 213 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1346	* 1.5540	* 1.5031	* 1.3232	* 1.4392	* 1.3730	* 1.3199	* .7315
	* 2.8013	* 2.0462	* 2.1022	* 2.2487	* 2.0620	* 2.1518	* 2.2105	* 3.9419
9	* 1.5540	* 1.5519	* 1.3980	* 1.4305	* 1.4348	* 1.5486	* 1.5215	* .8930
	* 2.0462	* 2.0506	* 2.2673	* 2.1016	* 2.1317	* 1.9583	* 1.9743	* 3.2677
10	* 1.5031	* 1.3969	* 1.4316	* 1.3416	* 1.5865	* 1.6310	* 1.5248	* .7673
	* 2.1022	* 2.2701	* 2.1573	* 2.3282	* 1.9981	* 1.9481	* 2.0027	* 3.9046
11	* 1.3232	* 1.4327	* 1.3405	* 1.4662	* 1.4912	* 1.6429	* 1.5193	* .6925
	* 2.2487	* 2.0988	* 2.3270	* 2.2226	* 2.1753	* 1.9806	* 2.1310	* 4.4811
12	* 1.4392	* 1.4337	* 1.5855	* 1.4912	* 1.6234	* 1.6028	* .9797	*
	* 2.0620	* 2.1327	* 2.0015	* 2.1753	* 2.0472	* 2.0634	* 3.3330	*
13	* 1.3730	* 1.5464	* 1.6321	* 1.6440	* 1.6028	* 1.5053	* .7293	*
	* 2.1518	* 1.9600	* 1.9481	* 1.9797	* 2.0643	* 2.2080	* 4.4962	*
14	* 1.3199	* 1.5215	* 1.5248	* 1.5193	* .9797	* .7293	*	*
	* 2.2105	* 1.9743	* 2.0037	* 2.1300	* 3.3281	* 4.4962	*	*
15	* .7315	* .8951	* .7673	* .6925	* F-SUB-Q			
	* 3.9419	* 3.2587	* 3.8974	* 4.4862	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0902	* 1.4977	* 1.4478	* 1.2820	* 1.3893	* 1.3308	* 1.2723	* .7022
	* 2.6370	* 1.9009	* 1.9527	* 2.1115	* 1.9406	* 2.0220	* 2.0926	* 3.7509
9	* 1.4977	* 1.4955	* 1.3535	* 1.3795	* 1.3904	* 1.4933	* 1.4760	* .8594
	* 1.9009	* 1.9125	* 2.0928	* 1.9756	* 1.9939	* 1.8416	* 1.8514	* 3.0960
10	* 1.4478	* 1.3525	* 1.3795	* 1.3004	* 1.5313	* 1.5746	* 1.4803	* .7380
	* 1.9527	* 2.0946	* 2.0169	* 2.1731	* 1.8676	* 1.8246	* 1.8727	* 3.6844
11	* 1.2820	* 1.3817	* 1.2994	* 1.4142	* 1.4467	* 1.5898	* 1.4749	* .6665
	* 2.1115	* 1.9731	* 2.1721	* 2.0932	* 2.0257	* 1.8514	* 1.9728	* 4.2184
12	* 1.3893	* 1.3893	* 1.5291	* 1.4457	* 1.5724	* 1.5573	* .9461	*
	* 1.9406	* 1.9947	* 1.8723	* 2.0275	* 1.9082	* 1.9255	* 3.1348	*
13	* 1.3308	* 1.4912	* 1.5757	* 1.5909	* 1.5573	* 1.4641	* .7044	*
	* 2.0220	* 1.8431	* 1.8246	* 1.8507	* 1.9247	* 2.0581	* 4.2294	*
14	* 1.2723	* 1.4760	* 1.4803	* 1.4760	* .9461	* .7044	*	*
	* 2.0926	* 1.8514	* 1.8720	* 1.9720	* 3.1327	* 4.2334	*	*
15	* .7022	* .8615	* .7391	* .6665	* F-SUB-Q			
	* 3.7509	* 3.0879	* 3.6844	* 4.2146	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 214 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A

8 *	1.0349	1.4218	1.3741	1.2148	1.3167	1.2614	1.2040	.6643 *
	2.4806	1.8147	1.8672	2.0428	1.8807	1.9622	2.0378	3.6697 *

9 *	1.4218	1.4196	1.2842	1.3069	1.3189	1.4164	1.3991	.8128 *
	1.8147	1.8175	2.0077	1.9097	1.9219	1.7776	1.7960	3.0256 *

10 *	1.3741	1.2831	1.3080	1.2322	1.4522	1.4944	1.4034	.6990 *
	1.8672	2.0089	1.9371	2.0934	1.7931	1.7553	1.8090	3.5835 *

11 *	1.2148	1.3102	1.2311	1.3405	1.3720	1.5085	1.3991	.6296 *
	2.0428	1.9074	2.0925	1.9914	1.9363	1.7662	1.8963	4.0846 *

12 *	1.3167	1.3178	1.4511	1.3720	1.4923	1.4771	.8962 *	
	1.8807	1.9227	1.7958	1.9380	1.8203	1.8397	2.9915 *	

13 *	1.2614	1.4142	1.4944	1.5085	1.4771	1.3882	.6665 *	
	1.9622	1.7812	1.7553	1.7655	1.8397	1.9801	4.0690 *	

14 *	1.2040	1.3991	1.4034	1.4001	.8973 *	.6676 *		
	2.0378	1.7960	1.8098	1.8956	2.9896 *	4.0690 *		

15 *	.6643 *	.8149 *	.6990 *	.6296 *	F-SUB-Q			
	3.6697 *	3.0178 *	3.5808 *	4.0768 *	M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A

8 *	.9656	1.3210	1.2755	1.1195	1.2181	1.1606	1.1119	.6145 *
	2.4485	1.7904	1.8361	2.0597	1.8868	1.9842	2.0579	3.7046 *

9 *	1.3210	1.3199	1.1867	1.2105	1.2148	1.3113	1.2853	.7478 *
	1.7904	1.8064	1.9800	1.9113	1.9301	1.7796	1.8185	3.0648 *

10 *	1.2755	1.1856	1.2116	1.1357	1.3449	1.3828	1.2874	.6437 *
	1.8361	1.9816	1.9250	2.0956	1.7819	1.7477	1.8261	3.6174 *

11 *	1.1195	1.2127	1.1346	1.2398	1.2636	1.3936	1.2842	.5787 *
	2.0597	1.9090	2.0947	1.9848	1.9470	1.7668	1.8997	4.1000 *

12 *	1.2181	1.2148	1.3438	1.2636	1.3774	1.3579	.8279 *	
	1.8868	1.9309	1.7861	1.9470	1.8049	1.8385	2.9934 *	

13 *	1.1606	1.3091	1.3828	1.3947	1.3590	1.2723	.6145 *	
	1.9842	1.7823	1.7477	1.7661	1.8370	1.9781	4.0596 *	

14 *	1.1119	1.2853	1.2885	1.2842	.8279 *	.6145 *		
	2.0579	1.8185	1.8261	1.8989	2.9894 *	4.0523 *		

15 *	.6145 *	.7499 *	.6437 *	.5798 *	F-SUB-Q			
	3.7046 *	3.0568 *	3.6146 *	4.0964 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 215 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OF MARGIN) - POWER ESCALATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9006 *	* 1.2300 *	* 1.1856 *	* 1.0382 *	* 1.1336 *	* 1.0729 *	* 1.0273 *	* .5668 *
	* 2.4208 *	* 1.7741 *	* 1.8342 *	* 2.0879 *	* 1.9062 *	* 2.0208 *	* 2.1033 *	* 3.7947 *
9	* 1.2300 *	* 1.2289 *	* 1.1000 *	* 1.1260 *	* 1.1227 *	* 1.2159 *	* 1.1801 *	* .6871 *
	* 1.7741 *	* 1.7766 *	* 1.9820 *	* 1.9290 *	* 1.9590 *	* 1.8002 *	* 1.8617 *	* 3.1513 *
10	* 1.1856 *	* 1.0989 *	* 1.1260 *	* 1.0490 *	* 1.2473 *	* 1.2788 *	* 1.1823 *	* .5917 *
	* 1.8342 *	* 1.9847 *	* 1.9333 *	* 2.1193 *	* 1.7929 *	* 1.7535 *	* 1.8675 *	* 3.7062 *
11	* 1.0382 *	* 1.1281 *	* 1.0490 *	* 1.1487 *	* 1.1661 *	* 1.2896 *	* 1.1780 *	* .5310 *
	* 2.0879 *	* 1.9232 *	* 2.1172 *	* 1.9935 *	* 1.9485 *	* 1.7661 *	* 1.9239 *	* 4.2009 *
12	* 1.1336 *	* 1.1216 *	* 1.2452 *	* 1.1661 *	* 1.2766 *	* 1.2506 *	* .7651 *	
	* 1.9062 *	* 1.9598 *	* 1.7965 *	* 1.9485 *	* 1.8266 *	* 1.8722 *	* 3.0304 *	
13	* 1.0729 *	* 1.2137 *	* 1.2798 *	* 1.2907 *	* 1.2517 *	* 1.1671 *	* .5668 *	
	* 2.0208 *	* 1.8038 *	* 1.7528 *	* 1.7655 *	* 1.8715 *	* 2.0182 *	* 4.1337 *	
14	* 1.0273 *	* 1.1801 *	* 1.1823 *	* 1.1791 *	* .7651 *	* .5668 *		
	* 2.1033 *	* 1.8617 *	* 1.8684 *	* 1.9231 *	* 3.0285 *	* 4.1261 *		
15	* .5668 *	* .6881 *	* .5917 *	* .5310 *	F-SUB-Q			
	* 3.7947 *	* 3.1428 *	* 3.7032 *	* 4.1926 *	M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7944 *	* 1.0750 *	* 1.0393 *	* .9136 *	* 1.0089 *	* .9374 *	* .8995 *	* .4963 *
	* 2.5686 *	* 1.9131 *	* 1.9763 *	* 2.2542 *	* 2.0384 *	* 2.2043 *	* 2.2936 *	* 4.1496 *
9	* 1.0750 *	* 1.0729 *	* .9569 *	* .9959 *	* .9732 *	* 1.0620 *	* 1.0089 *	* .5939 *
	* 1.9131 *	* 1.9137 *	* 2.1524 *	* 2.0692 *	* 2.1446 *	* 1.9600 *	* 2.0667 *	* 3.4810 *
10	* 1.0393 *	* .9558 *	* .9959 *	* .9179 *	* 1.0891 *	* 1.1108 *	* 1.0057 *	* .5093 *
	* 1.9763 *	* 2.1543 *	* 2.0734 *	* 2.2944 *	* 1.9414 *	* 1.9078 *	* 2.0869 *	* 4.0975 *
11	* .9136 *	* .9981 *	* .9168 *	* 1.0133 *	* 1.0100 *	* 1.1260 *	* 1.0024 *	* .4562 *
	* 2.2542 *	* 2.0634 *	* 2.2933 *	* 2.1125 *	* 2.1167 *	* 1.9046 *	* 2.1348 *	* 4.6356 *
12	* 1.0089 *	* .9732 *	* 1.0880 *	* 1.0089 *	* 1.1227 *	* 1.0826 *	* .6676 *	
	* 2.0384 *	* 2.1455 *	* 1.9448 *	* 2.1167 *	* 1.9386 *	* 2.0220 *	* 3.2526 *	
13	* .9374 *	* 1.0609 *	* 1.1119 *	* 1.1260 *	* 1.0826 *	* .9981 *	* .4942 *	
	* 2.2043 *	* 1.9625 *	* 1.9071 *	* 1.9038 *	* 2.0220 *	* 2.2258 *	* 4.4715 *	
14	* .8995 *	* 1.0089 *	* 1.0057 *	* 1.0035 *	* .6676 *	* .4942 *		
	* 2.2936 *	* 2.0647 *	* 2.0880 *	* 2.1339 *	* 3.2553 *	* 4.4766 *		
15	* .4963 *	* .5950 *	* .5104 *	* .4562 *	F-SUB-Q			
	* 4.1496 *	* 3.4733 *	* 4.1018 *	* 4.6310 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 216 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6307 *	* .7781 *	* .7640 *	* .7347 *	* .8063 *	* .7358 *	* .6979 *	* .3923 *
	* 3.1050 *	* 2.5285 *	* 2.5768 *	* 2.6873 *	* 2.4467 *	* 2.6944 *	* 2.8483 *	* 5.0794 *
9	* .7781 *	* .7813 *	* .7423 *	* .7564 *	* .7543 *	* .7954 *	* .7683 *	* .4508 *
	* 2.5285 *	* 2.5144 *	* 2.6554 *	* 2.6112 *	* 2.6585 *	* 2.5138 *	* 2.6127 *	* 4.4178 *
10	* .7640 *	* .7423 *	* .7586 *	* .7304 *	* .7965 *	* .7998 *	* .7521 *	* .3945 *
	* 2.5768 *	* 2.6569 *	* 2.6030 *	* 2.7547 *	* 2.5395 *	* 2.5357 *	* 2.6825 *	* 5.1069 *
11	* .7347 *	* .7575 *	* .7293 *	* .7651 *	* .7846 *	* .8648 *	* .7564 *	* .3555 *
	* 2.6873 *	* 2.6033 *	* 2.7511 *	* 2.6638 *	* 2.6158 *	* 2.3727 *	* 2.7134 *	* 5.7195 *
12	* .8063 *	* .7532 *	* .7954 *	* .7846 *	* .8865 *	* .8420 *	* .5278 *	
	* 2.4467 *	* 2.6600 *	* 2.5409 *	* 2.6158 *	* 2.3277 *	* 2.4688 *	* 3.9374 *	
13	* .7358 *	* .7944 *	* .8009 *	* .8648 *	* .8431 *	* .7564 *	* .3880 *	
	* 2.6944 *	* 2.5164 *	* 2.5327 *	* 2.3700 *	* 2.4704 *	* 2.7814 *	* 5.4088 *	
14	* .6979 *	* .7683 *	* .7521 *	* .7564 *	* .5278 *	* .3890 *		
	* 2.8483 *	* 2.6127 *	* 2.6825 *	* 2.7118 *	* 3.9301 *	* 5.3950 *		
15	* .3923 *	* .4519 *	* .3945 *	* .3565 *	F-SUB-Q			
	* 5.0794 *	* 4.4187 *	* 5.0947 *	* 5.7042 *	M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .4042 *	* .3175 *	* .3305 *	* .3674 *	* .3435 *	* .3620 *	* .3067 *	* .1864 *
	* 4.6888 *	* 5.9461 *	* 5.7121 *	* 5.1289 *	* 5.5023 *	* 5.2352 *	* 6.2252 *	* 10.2472 *
9	* .3175 *	* .3359 *	* .3609 *	* .3381 *	* .3674 *	* .3381 *	* .3197 *	* .1983 *
	* 5.9461 *	* 5.6206 *	* 5.2083 *	* 5.5952 *	* 5.1413 *	* 5.6248 *	* 6.0073 *	* 9.6897 *
10	* .3305 *	* .3609 *	* .3327 *	* .3630 *	* .3349 *	* .3240 *	* .3143 *	* .1951 *
	* 5.7121 *	* 5.2153 *	* 5.6762 *	* 5.2573 *	* 5.7345 *	* 6.0117 *	* 6.1343 *	* 9.8978 *
11	* .3674 *	* .3381 *	* .3630 *	* .3490 *	* .3815 *	* .3533 *	* .3013 *	* .1712 *
	* 5.1289 *	* 5.6033 *	* 5.2515 *	* 5.6019 *	* 5.1177 *	* 5.5425 *	* 6.5151 *	* 11.4112 *
12	* .3435 *	* .3685 *	* .3349 *	* .3815 *	* .3641 *	* .3533 *	* .2568 *	
	* 5.5023 *	* 5.1413 *	* 5.7345 *	* 5.1177 *	* 5.4061 *	* 5.6033 *	* 7.7248 *	
13	* .3620 *	* .3381 *	* .3240 *	* .3533 *	* .3533 *	* .3099 *	* .1886 *	
	* 5.2352 *	* 5.6100 *	* 6.0117 *	* 5.5425 *	* 5.6033 *	* 6.4488 *	* 10.5932 *	
14	* .3067 *	* .3197 *	* .3143 *	* .3013 *	* .2568 *	* .1886 *		
	* 6.2252 *	* 5.9997 *	* 6.1343 *	* 6.5151 *	* 7.6969 *	* 10.5932 *		
15	* .1864 *	* .1983 *	* .1951 *	* .1712 *	F-SUB-Q			
	* 10.2472 *	* 9.6458 *	* 9.8520 *	* 11.4112 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 217 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 30% POWER, 4 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .7597 *	* .6231 *	* .6058 *	* .5960 *	* .5559 *	* .5689 *	* .5028 *	* .3208 *
	* 3.3526 *	* 4.2915 *	* 4.5317 *	* 4.1937 *	* 4.5083 *	* 4.2140 *	* 4.8757 *	* 7.4244 *
9	* .6231 *	* .6275 *	* .6361 *	* .5711 *	* .5874 *	* .5592 *	* .5169 *	* .3381 *
	* 4.2915 *	* 4.3201 *	* 4.1572 *	* 4.5452 *	* 4.1854 *	* 4.5217 *	* 4.6874 *	* 7.0900 *
10	* .6058 *	* .6361 *	* .5874 *	* .5787 *	* .5592 *	* .5494 *	* .5126 *	* .3327 *
	* 4.5317 *	* 4.1531 *	* 4.5547 *	* 4.3684 *	* 4.6698 *	* 4.7705 *	* 4.8301 *	* 7.3263 *
11	* .5960 *	* .5722 *	* .5787 *	* .5397 *	* .5624 *	* .5375 *	* .4703 *	* .2861 *
	* 4.1937 *	* 4.5452 *	* 4.3640 *	* 4.9307 *	* 4.6335 *	* 5.0214 *	* 5.5762 *	* 8.8515 *
12	* .5559 *	* .5874 *	* .5592 *	* .5624 *	* .4909 *	* .4736 *	* .3956 *	
	* 4.5083 *	* 4.1854 *	* 4.6604 *	* 4.6335 *	* 4.9050 *	* 5.0237 *	* 6.6206 *	
13	* .5689 *	* .5592 *	* .5494 *	* .5375 *	* .4736 *	* .4075 *	* .2818 *	
	* 4.2140 *	* 4.5217 *	* 4.7705 *	* 5.0214 *	* 5.0237 *	* 5.7031 *	* 8.8615 *	
14	* .5028 *	* .5169 *	* .5137 *	* .4703 *	* .3956 *	* .2818 *		
	* 4.8757 *	* 4.6874 *	* 4.8301 *	* 5.5823 *	* 6.6206 *	* 8.8615 *		
15	* .3208 *	* .3392 *	* .3327 *	* .2861 *	* F-SUB-Q			
	* 7.4244 *	* 7.0684 *	* 7.3371 *	* 8.8666 *	* M-SUB-Q			

AT 30% POWER, 4 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1466 *	* 1.5909 *	* 1.4901 *	* 1.1368 *	* 1.2614 *	* 1.1065 *	* 1.1195 *	* .6567 *
	* 2.3335 *	* 1.8339 *	* 2.0153 *	* 2.4034 *	* 2.1546 *	* 2.3560 *	* 2.3528 *	* 3.9005 *
9	* 1.5909 *	* 1.5941 *	* 1.2864 *	* 1.3102 *	* 1.1682 *	* 1.3600 *	* 1.1801 *	* .7651 *
	* 1.8339 *	* 1.8561 *	* 2.2619 *	* 2.1392 *	* 2.3107 *	* 2.0362 *	* 2.2235 *	* 3.3686 *
10	* 1.4901 *	* 1.2864 *	* 1.3275 *	* 1.0989 *	* 1.3774 *	* 1.3893 *	* 1.1693 *	* .6470 *
	* 2.0153 *	* 2.2630 *	* 2.1610 *	* 2.4850 *	* 2.0723 *	* 2.0420 *	* 2.2885 *	* 4.0538 *
11	* 1.1368 *	* 1.3113 *	* 1.1021 *	* 1.2376 *	* 1.1531 *	* 1.3254 *	* 1.1195 *	* .5744 *
	* 2.4034 *	* 2.1371 *	* 2.4794 *	* 2.3517 *	* 2.4759 *	* 2.2237 *	* 2.5367 *	* 4.7279 *
12	* 1.2614 *	* 1.1682 *	* 1.3763 *	* 1.1541 *	* 1.1390 *	* 1.1270 *	* .7933 *	
	* 2.1546 *	* 2.3130 *	* 2.0732 *	* 2.4759 *	* 2.2352 *	* 2.3848 *	* 3.5655 *	
13	* 1.1065 *	* 1.3600 *	* 1.3893 *	* 1.3254 *	* 1.1270 *	* .9959 *	* .5733 *	
	* 2.3560 *	* 2.0371 *	* 2.0420 *	* 2.2226 *	* 2.3848 *	* 2.6238 *	* 4.7219 *	
14	* 1.1195 *	* 1.1801 *	* 1.1704 *	* 1.1205 *	* .7933 *	* .5733 *		
	* 2.3528 *	* 2.2235 *	* 2.2896 *	* 2.5379 *	* 3.5630 *	* 4.7175 *		
15	* .6567 *	* .7662 *	* .6470 *	* .5754 *	* F-SUB-Q			
	* 3.9005 *	* 3.3612 *	* 4.0570 *	* 4.7279 *	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 218 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 30% POWER, 4 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.5074	* 2.0189	* 1.8661	* 1.4337	* 1.5605	* 1.4045	* 1.4045	* .8128
	* 2.0007	* 1.5297	* 1.6781	* 1.9890	* 1.8162	* 1.9350	* 1.9555	* 3.2863
9	* 2.0189	* 2.0092	* 1.6353	* 1.6299	* 1.4933	* 1.7112	* 1.5248	* .9667
	* 1.5297	* 1.5475	* 1.8543	* 1.7957	* 1.8808	* 1.6841	* 1.7961	* 2.7818
10	* 1.8661	* 1.6342	* 1.6505	* 1.3861	* 1.7372	* 1.7621	* 1.5183	* .8084
	* 1.6781	* 1.8559	* 1.8133	* 2.0530	* 1.7086	* 1.6730	* 1.8332	* 3.4008
11	* 1.4337	* 1.6310	* 1.3893	* 1.5562	* 1.4923	* 1.6906	* 1.4673	* .7207
	* 1.9890	* 1.7943	* 2.0520	* 1.9573	* 2.0007	* 1.8237	* 2.0195	* 3.9374
12	* 1.5605	* 1.4923	* 1.7361	* 1.4933	* 1.6017	* 1.5020	* .9959	*
	* 1.8162	* 1.8808	* 1.7105	* 2.0005	* 1.8480	* 1.9180	* 2.9801	*
13	* 1.4045	* 1.7101	* 1.7621	* 1.6917	* 1.5020	* 1.3492	* .7239	*
	* 1.9350	* 1.6842	* 1.6730	* 1.8229	* 1.9171	* 2.0838	* 3.9451	*
14	* 1.4045	* 1.5258	* 1.5193	* 1.4673	* .9970	* .7239	*	*
	* 1.9555	* 1.7967	* 1.8338	* 2.0186	* 2.9799	* 3.9420	*	*
15	* .8128	* .9677	* .8084	* .7207	* F-SUB-Q			
	* 3.2863	* 2.7783	* 3.3960	* 3.9374	* M-SUB-Q			

AT 30% POWER, 4 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.6537	* 2.2433	* 2.0872	* 1.6516	* 1.7773	* 1.6310	* 1.6028	* .9125
	* 1.9036	* 1.4339	* 1.5470	* 1.7757	* 1.6482	* 1.7176	* 1.7706	* 3.0265
9	* 2.2433	* 2.2324	* 1.8661	* 1.8466	* 1.7263	* 1.9377	* 1.7805	* 1.1000
	* 1.4339	* 1.4471	* 1.6837	* 1.6375	* 1.6788	* 1.5337	* 1.5861	* 2.5274
10	* 2.0872	* 1.8640	* 1.8683	* 1.6050	* 1.9691	* 2.0027	* 1.7751	* .9201
	* 1.5470	* 1.6857	* 1.6586	* 1.8299	* 1.5591	* 1.5253	* 1.6178	* 3.0905
11	* 1.6516	* 1.8488	* 1.6060	* 1.7838	* 1.7404	* 1.9452	* 1.7263	* .8247
	* 1.7757	* 1.6352	* 1.8292	* 1.7790	* 1.7815	* 1.6478	* 1.7763	* 3.5740
12	* 1.7773	* 1.7253	* 1.9680	* 1.7404	* 1.8737	* 1.7838	* 1.1433	*
	* 1.6482	* 1.6794	* 1.5601	* 1.7815	* 1.6598	* 1.6889	* 2.7100	*
13	* 1.6310	* 1.9355	* 2.0038	* 1.9463	* 1.7849	* 1.6255	* .8344	*
	* 1.7176	* 1.5357	* 1.5253	* 1.6472	* 1.6889	* 1.8148	* 3.5817	*
14	* 1.6028	* 1.7805	* 1.7762	* 1.7274	* 1.1444	* .8355	*	*
	* 1.7706	* 1.5861	* 1.6167	* 1.7756	* 2.7086	* 3.5792	*	*
15	* .9125	* 1.1021	* .9211	* .8247	* F-SUB-Q			
	* 3.0265	* 2.5231	* 3.0905	* 3.5688	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 219 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 30% POWER, 4 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.6787	* 2.2909	* 2.1522	* 1.7426	* 1.8694	* 1.7350	* 1.6873	* .9515
	* 1.9559	* 1.4622	* 1.5509	* 1.7340	* 1.6270	* 1.6737	* 1.7433	* 3.0168
9	* 2.2909	* 2.2823	* 1.9463	* 1.9312	* 1.8271	* 2.0276	* 1.8965	* 1.1531
	* 1.4622	* 1.4740	* 1.6692	* 1.6230	* 1.6415	* 1.5206	* 1.5420	* 2.5039
10	* 2.1522	* 1.9442	* 1.9507	* 1.7036	* 2.0634	* 2.1002	* 1.8932	* .9688
	* 1.5509	* 1.6698	* 1.6454	* 1.7885	* 1.5469	* 1.5117	* 1.5710	* 3.0526
11	* 1.7426	* 1.9333	* 1.7036	* 1.8846	* 1.8542	* 2.0558	* 1.8488	* .8713
	* 1.7340	* 1.6208	* 1.7877	* 1.7588	* 1.7408	* 1.6243	* 1.7132	* 3.5080
12	* 1.8694	* 1.8271	* 2.0623	* 1.8542	* 1.9994	* 1.9225	* 1.2105	*
	* 1.6270	* 1.6421	* 1.5480	* 1.7408	* 1.6266	* 1.6348	* 2.6761	*
13	* 1.7350	* 2.0254	* 2.1013	* 2.0569	* 1.9225	* 1.7664	* .8876	*
	* 1.6737	* 1.5224	* 1.5117	* 1.6237	* 1.6342	* 1.7465	* 3.5355	*
14	* 1.6873	* 1.8976	* 1.8932	* 1.8499	* 1.2116	* .8876	*	*
	* 1.7433	* 1.5420	* 1.5699	* 1.7125	* 2.6747	* 3.5330	*	*
15	* .9515	* 1.1552	* .9688	* .8713	* F-SUB-Q			
	* 3.0168	* 2.4997	* 3.0505	* 3.5052	* M-SUB-Q			

AT 30% POWER, 4 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.6656	* 2.2747	* 2.1522	* 1.7697	* 1.9030	* 1.7751	* 1.7198	* .9656
	* 2.0575	* 1.5354	* 1.6126	* 1.7615	* 1.6601	* 1.6946	* 1.7775	* 3.0926
9	* 2.2747	* 2.2682	* 1.9582	* 1.9539	* 1.8650	* 2.0569	* 1.9431	* 1.1715
	* 1.5354	* 1.5450	* 1.7235	* 1.6668	* 1.6675	* 1.5555	* 1.5598	* 2.5624
10	* 2.1522	* 1.9561	* 1.9702	* 1.7404	* 2.0959	* 2.1360	* 1.9409	* .9873
	* 1.6126	* 1.7235	* 1.6961	* 1.8194	* 1.5849	* 1.5476	* 1.5882	* 3.1159
11	* 1.7697	* 1.9572	* 1.7404	* 1.9236	* 1.9008	* 2.1013	* 1.9019	* .8897
	* 1.7615	* 1.6643	* 1.8186	* 1.8005	* 1.7652	* 1.6558	* 1.7337	* 3.5828
12	* 1.9030	* 1.8650	* 2.0948	* 1.9008	* 2.0536	* 1.9853	* 1.2398	*
	* 1.6601	* 1.6682	* 1.5860	* 1.7652	* 1.6610	* 1.6586	* 2.7405	*
13	* 1.7751	* 2.0547	* 2.1371	* 2.1024	* 1.9853	* 1.8336	* .9103	*
	* 1.6946	* 1.5566	* 1.5476	* 1.6552	* 1.6581	* 1.7691	* 3.6314	*
14	* 1.7198	* 1.9431	* 1.9409	* 1.9019	* 1.2398	* .9114	*	*
	* 1.7775	* 1.5598	* 1.5870	* 1.7330	* 2.7388	* 3.6314	*	*
15	* .9656	* 1.1736	* .9873	* .8908	* F-SUB-Q			
	* 3.0926	* 2.5580	* 3.1118	* 3.5773	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 220 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 30% POWER, 4 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.6494	* 2.2573	* 2.1479	* 1.7827	* 1.9268	* 1.8011	* 1.7448	* .9764
	* 2.1723	* 1.6105	* 1.6902	* 1.8255	* 1.7224	* 1.7513	* 1.8379	* 3.2075
9	* 2.2573	* 2.2530	* 1.9572	* 1.9680	* 1.8900	* 2.0796	* 1.9745	* 1.1856
	* 1.6105	* 1.6163	* 1.7887	* 1.7335	* 1.7266	* 1.6159	* 1.6089	* 2.6589
10	* 2.1479	* 1.9550	* 1.9821	* 1.7653	* 2.1219	* 2.1641	* 1.9734	* 1.0024
	* 1.6902	* 1.7909	* 1.7684	* 1.8859	* 1.6486	* 1.6080	* 1.6383	* 3.2280
11	* 1.7827	* 1.9713	* 1.7643	* 1.9507	* 1.9322	* 2.1371	* 1.9387	* .9049
	* 1.8255	* 1.7315	* 1.8851	* 1.8631	* 1.8043	* 1.6967	* 1.7873	* 3.7160
12	* 1.9268	* 1.8889	* 2.1197	* 1.9322	* 2.0937	* 2.0287	* 1.2625	*
	* 1.7224	* 1.7279	* 1.6504	* 1.8043	* 1.7083	* 1.6993	* 2.8282	*
13	* 1.8011	* 2.0775	* 2.1652	* 2.1381	* 2.0298	* 1.8802	* .9287	*
	* 1.7513	* 1.6176	* 1.6080	* 1.6961	* 1.6986	* 1.8096	* 3.7487	*
14	* 1.7448	* 1.9745	* 1.9734	* 1.9398	* 1.2625	* .9298	*	*
	* 1.8379	* 1.6089	* 1.6371	* 1.7858	* 2.8264	* 3.7456	*	*
15	* .9764	* 1.1877	* 1.0024	* .9049	* F-SUB-Q			
	* 3.2075	* 2.6512	* 3.2301	* 3.7160	* M-SUB-Q			

AT 30% POWER, 4 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.5952	* 2.1912	* 2.0948	* 1.7599	* 1.9030	* 1.7903	* 1.7253	* .9612
	* 2.3436	* 1.7344	* 1.8266	* 1.9643	* 1.8543	* 1.8765	* 1.9723	* 3.4576
9	* 2.1912	* 2.1880	* 1.9203	* 1.9355	* 1.8759	* 2.0514	* 1.9658	* 1.1704
	* 1.7344	* 1.7410	* 1.9189	* 1.8729	* 1.8516	* 1.7365	* 1.7185	* 2.8528
10	* 2.0948	* 1.9192	* 1.9452	* 1.7545	* 2.0948	* 2.1381	* 1.9647	* .9916
	* 1.8266	* 1.9206	* 1.9158	* 2.0299	* 1.7739	* 1.7269	* 1.7470	* 3.4452
11	* 1.7599	* 1.9377	* 1.7534	* 1.9301	* 1.9236	* 2.1186	* 1.9355	* .8951
	* 1.9643	* 1.8713	* 2.0289	* 1.9649	* 1.9032	* 1.7894	* 1.8829	* 3.9564
12	* 1.9030	* 1.8759	* 2.0937	* 1.9236	* 2.0829	* 2.0287	* 1.2538	*
	* 1.8543	* 1.8524	* 1.7760	* 1.9032	* 1.8036	* 1.7918	* 2.9794	*
13	* 1.7903	* 2.0493	* 2.1392	* 2.1197	* 2.0298	* 1.8867	* .9244	*
	* 1.8765	* 1.7385	* 1.7269	* 1.7887	* 1.7918	* 1.9140	* 3.9778	*
14	* 1.7253	* 1.9658	* 1.9647	* 1.9366	* 1.2549	* .9244	*	*
	* 1.9723	* 1.7185	* 1.7476	* 1.8821	* 2.9774	* 3.9778	*	*
15	* .9612	* 1.1726	* .9916	* .8951	* F-SUB-Q			
	* 3.4576	* 2.8474	* 3.4426	* 3.9530	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 221 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 30% POWER, 4 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.5529	* 2.1338	* 2.0471	* 1.7318	* 1.8770	* 1.7697	* 1.7047	* .9482
	* 2.5845	* 1.9057	* 1.9830	* 2.1212	* 1.9866	* 2.0232	* 2.1029	* 3.6884
9	* 2.1338	* 2.1316	* 1.8802	* 1.9019	* 1.8542	* 2.0244	* 1.9463	* 1.1552
	* 1.9057	* 1.9104	* 2.0993	* 2.0134	* 2.0019	* 1.8625	* 1.8491	* 3.0464
10	* 2.0471	* 1.8781	* 1.9095	* 1.7339	* 2.0688	* 2.1132	* 1.9463	* .9807
	* 1.9830	* 2.1012	* 2.0766	* 2.1968	* 1.9092	* 1.8573	* 1.8832	* 3.6887
11	* 1.7318	* 1.9051	* 1.7328	* 1.9062	* 1.9051	* 2.1002	* 1.9214	* .8854
	* 2.1212	* 2.0116	* 2.1957	* 2.1210	* 2.0649	* 1.9249	* 2.0366	* 4.2317
12	* 1.8770	* 1.8542	* 2.0666	* 1.9051	* 2.0666	* 2.0168	* 1.2430	*
	* 1.9866	* 2.0036	* 1.9116	* 2.0649	* 1.9427	* 1.9353	* 3.1970	*
13	* 1.7697	* 2.0222	* 2.1143	* 2.1002	* 2.0178	* 1.8791	* .9179	*
	* 2.0232	* 1.8647	* 1.8573	* 1.9241	* 1.9353	* 2.0592	* 4.2559	*
14	* 1.7047	* 1.9463	* 1.9474	* 1.9225	* 1.2441	* .9179	*	*
	* 2.1029	* 1.8498	* 1.8824	* 2.0356	* 3.1970	* 4.2559	*	*
15	* .9482	* 1.1574	* .9807	* .8865	* F-SUB-Q			
	* 3.6884	* 3.0403	* 3.6857	* 4.2317	* M-SUB-Q			

AT 30% POWER, 4 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.4858	* 2.0363	* 1.9582	* 1.6613	* 1.8109	* 1.7068	* 1.6472	* .9168
	* 2.9182	* 2.1482	* 2.2286	* 2.3762	* 2.1959	* 2.2545	* 2.3253	* 4.0678
9	* 2.0363	* 2.0352	* 1.7968	* 1.8271	* 1.7881	* 1.9539	* 1.8791	* 1.1151
	* 2.1482	* 2.1492	* 2.3788	* 2.2412	* 2.2295	* 2.0533	* 2.0578	* 3.3590
10	* 1.9582	* 1.7957	* 1.8336	* 1.6721	* 1.9973	* 2.0428	* 1.8791	* .9482
	* 2.2286	* 2.3801	* 2.3256	* 2.4609	* 2.1099	* 2.0479	* 2.0891	* 4.0297
11	* 1.6613	* 1.8304	* 1.6711	* 1.8412	* 1.8412	* 2.0330	* 1.8575	* .8572
	* 2.3762	* 2.2390	* 2.4609	* 2.3732	* 2.3143	* 2.1382	* 2.2710	* 4.6213
12	* 1.8109	* 1.7870	* 1.9951	* 1.8412	* 2.0016	* 1.9539	* 1.2051	*
	* 2.1959	* 2.2306	* 2.1109	* 2.3143	* 2.1802	* 2.1835	* 3.5732	*
13	* 1.7068	* 1.9507	* 2.0428	* 2.0341	* 1.9539	* 1.8206	* .8897	*
	* 2.2545	* 2.0559	* 2.0479	* 2.1373	* 2.1835	* 2.3208	* 4.7497	*
14	* 1.6472	* 1.8791	* 1.8791	* 1.8585	* 1.2051	* .8897	*	*
	* 2.3253	* 2.0578	* 2.0891	* 2.2699	* 3.5705	* 4.7447	*	*
15	* .9168	* 1.1173	* .9482	* .8572	* F-SUB-Q			
	* 4.0678	* 3.3517	* 4.0297	* 4.6213	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 222 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 30% POWER, 4 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.4359	* 1.9723	* 1.9008	* 1.6288	* 1.7729	* 1.6808	* 1.6136	* .8951
	* 3.1888	* 2.3451	* 2.4294	* 2.5935	* 2.3876	* 2.4523	* 2.5095	* 4.3945
9	* 1.9723	* 1.9713	* 1.7545	* 1.7838	* 1.7599	* 1.9116	* 1.8531	* 1.0913
	* 2.3451	* 2.3451	* 2.6000	* 2.4398	* 2.4382	* 2.2333	* 2.2335	* 3.6230
10	* 1.9008	* 1.7523	* 1.7881	* 1.6451	* 1.9561	* 2.0016	* 1.8542	* .9298
	* 2.4294	* 2.6014	* 2.5445	* 2.6888	* 2.3046	* 2.2365	* 2.2743	* 4.3708
11	* 1.6288	* 1.7870	* 1.6440	* 1.8044	* 1.8152	* 1.9994	* 1.8358	* .8399
	* 2.5935	* 2.4372	* 2.6902	* 2.5900	* 2.5426	* 2.3415	* 2.4780	* 5.0230
12	* 1.7729	* 1.7588	* 1.9539	* 1.8152	* 1.9723	* 1.9322	* 1.1856	*
	* 2.3876	* 2.4395	* 2.3081	* 2.5426	* 2.3871	* 2.4046	* 3.9275	*
13	* 1.6808	* 1.9095	* 2.0027	* 2.0005	* 1.9333	* 1.8054	* .8767	*
	* 2.4523	* 2.2364	* 2.2365	* 2.3404	* 2.4033	* 2.5738	* 5.2587	*
14	* 1.6136	* 1.8531	* 1.8553	* 1.8369	* 1.1856	* .8767	*	*
	* 2.5095	* 2.2315	* 2.2743	* 2.4766	* 3.9242	* 5.2587	*	*
15	* .8951	* 1.0935	* .9298	* .8399	* F-SUB-Q			
	* 4.3945	* 3.6146	* 4.3744	* 5.0277	* M-SUB-Q			

AT 30% POWER, 4 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3720	* 1.8878	* 1.8217	* 1.5746	* 1.7122	* 1.6266	* 1.5605	* .8637
	* 3.3558	* 2.4653	* 2.5525	* 2.7538	* 2.5250	* 2.6209	* 2.6854	* 4.7580
9	* 1.8878	* 1.8856	* 1.6852	* 1.7166	* 1.7014	* 1.8455	* 1.7957	* 1.0534
	* 2.4653	* 2.4653	* 2.7457	* 2.5763	* 2.6165	* 2.3948	* 2.4101	* 3.9457
10	* 1.8217	* 1.6841	* 1.7198	* 1.5920	* 1.8878	* 1.9344	* 1.7979	* .8995
	* 2.5525	* 2.7473	* 2.6747	* 2.8705	* 2.4653	* 2.3985	* 2.4634	* 4.7823
11	* 1.5746	* 1.7198	* 1.5909	* 1.7426	* 1.7588	* 1.9366	* 1.7816	* .8128
	* 2.7538	* 2.5735	* 2.8687	* 2.6993	* 2.6597	* 2.4308	* 2.6224	* 5.5520
12	* 1.7122	* 1.7014	* 1.8856	* 1.7588	* 1.9127	* 1.8781	* 1.1487	*
	* 2.5250	* 2.6180	* 2.4692	* 2.6597	* 2.4822	* 2.5165	* 4.0830	*
13	* 1.6266	* 1.8423	* 1.9355	* 1.9377	* 1.8781	* 1.7567	* .8496	*
	* 2.6209	* 2.3960	* 2.3985	* 2.4295	* 2.5151	* 2.6966	* 5.5063	*
14	* 1.5605	* 1.7957	* 1.7979	* 1.7827	* 1.1487	* .8507	*	*
	* 2.6854	* 2.4101	* 2.4634	* 2.6209	* 4.0830	* 5.4999	*	*
15	* .8637	* 1.0555	* .8995	* .8128	* F-SUB-Q			
	* 4.7580	* 3.9357	* 4.7823	* 5.5454	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 223 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 30% POWER, 4 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3026	* 1.7892	* 1.7285	* 1.5009	* 1.6342	* 1.5529	* 1.4912	* .8247
	* 3.5384	* 2.5958	* 2.6815	* 2.8333	* 2.5858	* 2.6954	* 2.7473	* 4.8667
9	* 1.7892	* 1.7870	* 1.5995	* 1.6342	* 1.6245	* 1.7621	* 1.7155	* 1.0057
	* 2.5958	* 2.6001	* 2.8943	* 2.6409	* 2.6907	* 2.4511	* 2.4769	* 4.0430
10	* 1.7285	* 1.5974	* 1.6364	* 1.5193	* 1.8033	* 1.8499	* 1.7177	* .8594
	* 2.6815	* 2.8979	* 2.7409	* 2.9542	* 2.5247	* 2.4562	* 2.5315	* 4.8971
11	* 1.5009	* 1.6375	* 1.5183	* 1.6646	* 1.6819	* 1.8542	* 1.7047	* .7770
	* 2.8333	* 2.6380	* 2.9524	* 2.8265	* 2.7880	* 2.5384	* 2.7441	* 5.6837
12	* 1.6342	* 1.6234	* 1.8022	* 1.6819	* 1.8304	* 1.7989	* 1.1000	*
	* 2.5858	* 2.6923	* 2.5274	* 2.7880	* 2.6073	* 2.6469	* 4.2666	*
13	* 1.5529	* 1.7588	* 1.8499	* 1.8553	* 1.7989	* 1.6830	* .8139	*
	* 2.6954	* 2.4524	* 2.4562	* 2.5370	* 2.6454	* 2.8419	* 5.7673	*
14	* 1.4912	* 1.7155	* 1.7187	* 1.7057	* 1.1000	* .8139	*	*
	* 2.7473	* 2.4769	* 2.5302	* 2.7425	* 4.2628	* 5.7602	*	*
15	* .8247	* 1.0078	* .8594	* .7770	* F-SUB-Q			
	* 4.8667	* 4.0327	* 4.8971	* 5.6837	* M-SUB-Q			

AT 30% POWER, 4 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2549	* 1.7296	* 1.6721	* 1.4597	* 1.5887	* 1.5128	* 1.4511	* .8019
	* 3.4021	* 2.4813	* 2.5584	* 2.7765	* 2.5384	* 2.6424	* 2.6954	* 4.7681
9	* 1.7296	* 1.7263	* 1.5497	* 1.5855	* 1.5822	* 1.7133	* 1.6743	* .9786
	* 2.4813	* 2.4892	* 2.7546	* 2.5943	* 2.6439	* 2.4122	* 2.4283	* 3.9580
10	* 1.6721	* 1.5486	* 1.5865	* 1.4793	* 1.7556	* 1.8022	* 1.6776	* .8366
	* 2.5584	* 2.7545	* 2.6807	* 2.8979	* 2.4617	* 2.4039	* 2.4834	* 4.7973
11	* 1.4597	* 1.5887	* 1.4782	* 1.6201	* 1.6418	* 1.8098	* 1.6667	* .7564
	* 2.7765	* 2.5915	* 2.8961	* 2.6785	* 2.6427	* 2.4097	* 2.5918	* 5.5110
12	* 1.5887	* 1.5822	* 1.7534	* 1.6418	* 1.7881	* 1.7599	* 1.0739	*
	* 2.5384	* 2.6454	* 2.4643	* 2.6427	* 2.4727	* 2.4949	* 4.0068	*
13	* 1.5128	* 1.7112	* 1.8033	* 1.8109	* 1.7599	* 1.6494	* .7944	*
	* 2.6424	* 2.4134	* 2.4027	* 2.4085	* 2.4963	* 2.6642	* 5.3767	*
14	* 1.4511	* 1.6743	* 1.6776	* 1.6678	* 1.0739	* .7954	*	*
	* 2.6954	* 2.4283	* 2.4821	* 2.5903	* 4.0034	* 5.3640	*	*
15	* .8019	* .9807	* .8377	* .7564	* F-SUB-Q			
	* 4.7681	* 3.9481	* 4.7924	* 5.5110	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 224 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 30% POWER, 4 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1899	* 1.6461	* 1.5920	* 1.4001	* 1.5204	* 1.4522	* 1.3893	* .7651
	* 3.1731	* 2.3133	* 2.3839	* 2.5614	* 2.3500	* 2.4461	* 2.5063	* 4.4465
9	* 1.6461	* 1.6418	* 1.4803	* 1.5139	* 1.5193	* 1.6396	* 1.6093	* .9363
	* 2.3133	* 2.3213	* 2.5591	* 2.3989	* 2.4392	* 2.2372	* 2.2470	* 3.6852
10	* 1.5920	* 1.4793	* 1.5139	* 1.4196	* 1.6797	* 1.7263	* 1.6136	* .8009
	* 2.3839	* 2.5634	* 2.4793	* 2.6658	* 2.2908	* 2.2341	* 2.2906	* 4.4322
11	* 1.4001	* 1.5161	* 1.4186	* 1.5508	* 1.5779	* 1.7372	* 1.6050	* .7239
	* 2.5614	* 2.3965	* 2.6643	* 2.4894	* 2.4470	* 2.2328	* 2.3996	* 5.1231
12	* 1.5204	* 1.5183	* 1.6787	* 1.5779	* 1.7177	* 1.6949	* 1.0306	*
	* 2.3500	* 2.4405	* 2.2930	* 2.4470	* 2.2933	* 2.3115	* 3.7239	*
13	* 1.4522	* 1.6364	* 1.7274	* 1.7383	* 1.6960	* 1.5909	* .7629	*
	* 2.4461	* 2.2406	* 2.2331	* 2.2317	* 2.3103	* 2.4665	* 5.0007	*
14	* 1.3893	* 1.6093	* 1.6136	* 1.6060	* 1.0306	* .7640	*	*
	* 2.5063	* 2.2470	* 2.2881	* 2.3984	* 3.7239	* 5.0065	*	*
15	* .7651	* .9385	* .8019	* .7250	* F-SUB-Q			
	* 4.4465	* 3.6737	* 4.4280	* 5.1299	* M-SUB-Q			

AT 30% POWER, 4 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1270	* 1.5584	* 1.5085	* 1.3319	* 1.4446	* 1.3817	* 1.3199	* .7261
	* 2.9820	* 2.1712	* 2.2384	* 2.3790	* 2.1848	* 2.2722	* 2.3361	* 4.1543
9	* 1.5584	* 1.5551	* 1.4045	* 1.4359	* 1.4457	* 1.5573	* 1.5334	* .8886
	* 2.1712	* 2.1782	* 2.4024	* 2.2291	* 2.2608	* 2.0783	* 2.0847	* 3.4419
10	* 1.5085	* 1.4034	* 1.4370	* 1.3514	* 1.5974	* 1.6418	* 1.5367	* .7618
	* 2.2384	* 2.4023	* 2.2974	* 2.4704	* 2.1277	* 2.0751	* 2.1213	* 4.1272
11	* 1.3319	* 1.4392	* 1.3503	* 1.4749	* 1.5042	* 1.6548	* 1.5313	* .6881
	* 2.3790	* 2.2259	* 2.4691	* 2.3437	* 2.2980	* 2.0986	* 2.2514	* 4.7555
12	* 1.4446	* 1.4446	* 1.5952	* 1.5031	* 1.6364	* 1.6180	* .9807	*
	* 2.1848	* 2.2619	* 2.1305	* 2.2980	* 2.1550	* 2.1701	* 3.5074	*
13	* 1.3817	* 1.5551	* 1.6429	* 1.6548	* 1.6180	* 1.5193	* .7272	*
	* 2.2722	* 2.0801	* 2.0751	* 2.0977	* 2.1680	* 2.3178	* 4.7218	*
14	* 1.3199	* 1.5334	* 1.5378	* 1.5313	* .9818	* .7272	*	*
	* 2.3361	* 2.0858	* 2.1213	* 2.2504	* 3.5048	* 4.7120	*	*
15	* .7261	* .8908	* .7618	* .6881	* F-SUB-Q			
	* 4.1543	* 3.4318	* 4.1316	* 4.7613	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 225 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 30% POWER, 4 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0620	* 1.4662	* 1.4186	* 1.2517	* 1.3611	* 1.2994	* 1.2452	* .6849
	* 2.8013	* 2.0462	* 2.1022	* 2.2487	* 2.0620	* 2.1518	* 2.2105	* 3.9419
9	* 1.4662	* 1.4630	* 1.3189	* 1.3514	* 1.3600	* 1.4684	* 1.4424	* .8377
	* 2.0462	* 2.0506	* 2.2673	* 2.1016	* 2.1317	* 1.9583	* 1.9743	* 3.2677
10	* 1.4186	* 1.3178	* 1.3525	* 1.2712	* 1.5063	* 1.5486	* 1.4467	* .7185
	* 2.1022	* 2.2701	* 2.1573	* 2.3282	* 1.9981	* 1.9481	* 2.0027	* 3.9046
11	* 1.2517	* 1.3546	* 1.2701	* 1.3904	* 1.4164	* 1.5616	* 1.4413	* .6491
	* 2.2487	* 2.0988	* 2.3270	* 2.2226	* 2.1753	* 1.9806	* 2.1310	* 4.4811
12	* 1.3611	* 1.3590	* 1.5042	* 1.4153	* 1.5443	* 1.5248	* .9255	*
	* 2.0620	* 2.1327	* 2.0015	* 2.1753	* 2.0472	* 2.0634	* 3.3330	*
13	* 1.2994	* 1.4662	* 1.5497	* 1.5616	* 1.5248	* 1.4305	* .6849	*
	* 2.1518	* 1.9600	* 1.9481	* 1.9797	* 2.0643	* 2.2080	* 4.4962	*
14	* 1.2452	* 1.4424	* 1.4467	* 1.4413	* .9266	* .6860	*	*
	* 2.2105	* 1.9743	* 2.0037	* 2.1300	* 3.3281	* 4.4962	*	*
15	* .6849	* .8399	* .7185	* .6491	* F-SUB-Q			
	* 3.9419	* 3.2587	* 3.8974	* 4.4862	* M-SUB-Q			

AT 30% POWER, 4 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0068	* 1.3936	* 1.3492	* 1.1964	* 1.2961	* 1.2430	* 1.1845	* .6491
	* 2.6370	* 1.9009	* 1.9527	* 2.1115	* 1.9406	* 2.0220	* 2.0926	* 3.7509
9	* 1.3936	* 1.3904	* 1.2603	* 1.2864	* 1.3004	* 1.3969	* 1.3806	* .7954
	* 1.9009	* 1.9125	* 2.0928	* 1.9756	* 1.9939	* 1.8416	* 1.8514	* 3.0960
10	* 1.3492	* 1.2593	* 1.2874	* 1.2159	* 1.4337	* 1.4760	* 1.3861	* .6827
	* 1.9527	* 2.0946	* 2.0169	* 2.1731	* 1.8676	* 1.8246	* 1.8727	* 3.6844
11	* 1.1964	* 1.2896	* 1.2148	* 1.3232	* 1.3546	* 1.4901	* 1.3806	* .6166
	* 2.1115	* 1.9731	* 2.1721	* 2.0932	* 2.0257	* 1.8514	* 1.9728	* 4.2184
12	* 1.2961	* 1.2994	* 1.4327	* 1.3546	* 1.4749	* 1.4608	* .8821	*
	* 1.9406	* 1.9947	* 1.8723	* 2.0275	* 1.9082	* 1.9255	* 3.1348	*
13	* 1.2430	* 1.3947	* 1.4760	* 1.4912	* 1.4619	* 1.3730	* .6535	*
	* 2.0220	* 1.8431	* 1.8246	* 1.8507	* 1.9247	* 2.0581	* 4.2294	*
14	* 1.1845	* 1.3806	* 1.3861	* 1.3817	* .8832	* .6535	*	*
	* 2.0926	* 1.8514	* 1.8720	* 1.9720	* 3.1327	* 4.2334	*	*
15	* .6491	* .7976	* .6838	* .6166	* F-SUB-Q			
	* 3.7509	* 3.0879	* 3.6844	* 4.2146	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 226 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 30% POWER, 4 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .9439	* 1.3059	* 1.2625	* 1.1195	* 1.2127	* 1.1628	* 1.1065	* .6058
	* 2.4806	* 1.8147	* 1.8672	* 2.0428	* 1.8807	* 1.9622	* 2.0378	* 3.6697
9	* 1.3059	* 1.3026	* 1.1801	* 1.2040	* 1.2170	* 1.3069	* 1.2907	* .7423
	* 1.8147	* 1.8175	* 2.0077	* 1.9097	* 1.9219	* 1.7776	* 1.7960	* 3.0256
10	* 1.2625	* 1.1801	* 1.2040	* 1.1379	* 1.3416	* 1.3806	* 1.2961	* .6383
	* 1.8672	* 2.0089	* 1.9371	* 2.0934	* 1.7931	* 1.7553	* 1.8090	* 3.5835
11	* 1.1195	* 1.2062	* 1.1368	* 1.2376	* 1.2679	* 1.3947	* 1.2918	* .5744
	* 2.0428	* 1.9074	* 2.0925	* 1.9914	* 1.9363	* 1.7662	* 1.8963	* 4.0846
12	* 1.2127	* 1.2159	* 1.3405	* 1.2679	* 1.3806	* 1.3676	* .8258	*
	* 1.8807	* 1.9227	* 1.7958	* 1.9380	* 1.8203	* 1.8397	* 2.9915	*
13	* 1.1628	* 1.3048	* 1.3817	* 1.3958	* 1.3676	* 1.2842	* .6112	*
	* 1.9622	* 1.7812	* 1.7553	* 1.7655	* 1.8397	* 1.9801	* 4.0690	*
14	* 1.1065	* 1.2907	* 1.2961	* 1.2929	* .8258	* .6112	*	*
	* 2.0378	* 1.7960	* 1.8098	* 1.8956	* 2.9896	* 4.0690	*	*
15	* .6058	* .7445	* .6383	* .5754	* F-SUB-Q			
	* 3.6697	* 3.0178	* 3.5808	* 4.0768	* M-SUB-Q			

AT 30% POWER, 4 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8691	* 1.1986	* 1.1574	* 1.0187	* 1.1075	* 1.0555	* 1.0078	* .5527
	* 2.4485	* 1.7904	* 1.8361	* 2.0597	* 1.8868	* 1.9842	* 2.0579	* 3.7046
9	* 1.1986	* 1.1964	* 1.0772	* 1.1000	* 1.1065	* 1.1942	* 1.1693	* .6751
	* 1.7904	* 1.8064	* 1.9800	* 1.9113	* 1.9301	* 1.7796	* 1.8185	* 3.0648
10	* 1.1574	* 1.0761	* 1.1010	* 1.0338	* 1.2267	* 1.2603	* 1.1736	* .5798
	* 1.8361	* 1.9816	* 1.9250	* 2.0956	* 1.7819	* 1.7477	* 1.8261	* 3.6174
11	* 1.0187	* 1.1021	* 1.0338	* 1.1303	* 1.1531	* 1.2723	* 1.1693	* .5223
	* 2.0597	* 1.9090	* 2.0947	* 1.9848	* 1.9470	* 1.7668	* 1.8997	* 4.1000
12	* 1.1075	* 1.1065	* 1.2246	* 1.1531	* 1.2582	* 1.2408	* .7521	*
	* 1.8868	* 1.9309	* 1.7861	* 1.9470	* 1.8049	* 1.8385	* 2.9934	*
13	* 1.0555	* 1.1921	* 1.2614	* 1.2723	* 1.2408	* 1.1606	* .5559	*
	* 1.9842	* 1.7823	* 1.7477	* 1.7661	* 1.8370	* 1.9781	* 4.0596	*
14	* 1.0078	* 1.1704	* 1.1736	* 1.1704	* .7521	* .5559	*	*
	* 2.0579	* 1.8185	* 1.8261	* 1.8989	* 2.9894	* 4.0523	*	*
15	* .5527	* .6762	* .5809	* .5223	* F-SUB-Q			
	* 3.7046	* 3.0568	* 3.6146	* 4.0964	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 227 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 30% POWER, 4 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .8009	* 1.1010	* 1.0620	* .9320	* 1.0176	* .9634	* .9190	* .5039
	* 2.4208	* 1.7741	* 1.8342	* 2.0879	* 1.9062	* 2.0208	* 2.1033	* 3.7947
9	* 1.1010	* 1.1000	* .9851	* 1.0100	* 1.0089	* 1.0924	* 1.0599	* .6112
	* 1.7741	* 1.7766	* 1.9820	* 1.9290	* 1.9590	* 1.8002	* 1.8617	* 3.1513
10	* 1.0620	* .9851	* 1.0100	* .9439	* 1.1227	* 1.1509	* 1.0620	* .5256
	* 1.8342	* 1.9847	* 1.9333	* 2.1193	* 1.7929	* 1.7535	* 1.8675	* 3.7062
11	* .9320	* 1.0122	* .9428	* 1.0338	* 1.0490	* 1.1617	* 1.0588	* .4725
	* 2.0879	* 1.9232	* 2.1172	* 1.9935	* 1.9485	* 1.7661	* 1.9239	* 4.2009
12	* 1.0176	* 1.0089	* 1.1205	* 1.0490	* 1.1509	* 1.1270	* .6860	*
	* 1.9062	* 1.9598	* 1.7965	* 1.9485	* 1.8266	* 1.8722	* 3.0304	*
13	* .9634	* 1.0902	* 1.1520	* 1.1617	* 1.1281	* 1.0501	* .5061	*
	* 2.0208	* 1.8038	* 1.7528	* 1.7655	* 1.8715	* 2.0182	* 4.1337	*
14	* .9190	* 1.0609	* 1.0631	* 1.0599	* .6860	* .5061	*	*
	* 2.1033	* 1.8617	* 1.8684	* 1.9231	* 3.0285	* 4.1261	*	*
15	* .5039	* .6123	* .5267	* .4725	* F-SUB-Q			
	* 3.7947	* 3.1428	* 3.7032	* 4.1926	* M-SUB-Q			

AT 30% POWER, 4 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .6990	* .9504	* .9201	* .8095	* .8930	* .8301	* .7944	* .4356
	* 2.5686	* 1.9131	* 1.9763	* 2.2542	* 2.0384	* 2.2043	* 2.2936	* 4.1496
9	* .9504	* .9482	* .8464	* .8821	* .8637	* .9428	* .8951	* .5213
	* 1.9131	* 1.9137	* 2.1524	* 2.0692	* 2.1446	* 1.9600	* 2.0667	* 3.4810
10	* .9201	* .8453	* .8810	* .8139	* .9667	* .9862	* .8919	* .4476
	* 1.9763	* 2.1543	* 2.0734	* 2.2944	* 1.9414	* 1.9078	* 2.0869	* 4.0975
11	* .8095	* .8832	* .8139	* .8995	* .8973	* 1.0003	* .8897	* .4010
	* 2.2542	* 2.0634	* 2.2933	* 2.1125	* 2.1167	* 1.9046	* 2.1348	* 4.6356
12	* .8930	* .8626	* .9656	* .8973	* .9981	* .9623	* .5906	*
	* 2.0384	* 2.1455	* 1.9448	* 2.1167	* 1.9386	* 2.0220	* 3.2526	*
13	* .8301	* .9407	* .9873	* 1.0003	* .9623	* .8865	* .4346	*
	* 2.2043	* 1.9625	* 1.9071	* 1.9038	* 2.0220	* 2.2258	* 4.4715	*
14	* .7944	* .8951	* .8919	* .8908	* .5917	* .4346	*	*
	* 2.2936	* 2.0647	* 2.0880	* 2.1339	* 3.2553	* 4.4766	*	*
15	* .4356	* .5223	* .4476	* .4010	* F-SUB-Q			
	* 4.1496	* 3.4733	* 4.1018	* 4.6310	* M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 228 of 268

TABLE 5 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 30% POWER, 4 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .5484 *	* .6784 *	* .6665 *	* .6416 *	* .7044 *	* .6426 *	* .6080 *	* .3392 *
	* 3.1050 *	* 2.5285 *	* 2.5768 *	* 2.6873 *	* 2.4467 *	* 2.6944 *	* 2.8483 *	* 5.0794 *
9	* .6784 *	* .6816 *	* .6481 *	* .6600 *	* .6589 *	* .6957 *	* .6719 *	* .3912 *
	* 2.5285 *	* 2.5144 *	* 2.6554 *	* 2.6112 *	* 2.6585 *	* 2.5138 *	* 2.6127 *	* 4.4178 *
10	* .6665 *	* .6470 *	* .6611 *	* .6383 *	* .6968 *	* .7001 *	* .6578 *	* .3414 *
	* 2.5768 *	* 2.6569 *	* 2.6030 *	* 2.7547 *	* 2.5395 *	* 2.5357 *	* 2.6825 *	* 5.1069 *
11	* .6416 *	* .6611 *	* .6383 *	* .6686 *	* .6871 *	* .7575 *	* .6611 *	* .3078 *
	* 2.6873 *	* 2.6033 *	* 2.7511 *	* 2.6638 *	* 2.6158 *	* 2.3727 *	* 2.7134 *	* 5.7195 *
12	* .7044 *	* .6589 *	* .6968 *	* .6871 *	* .7770 *	* .7380 *	* .4595 *	
	* 2.4467 *	* 2.6600 *	* 2.5409 *	* 2.6158 *	* 2.3277 *	* 2.4688 *	* 3.9374 *	
13	* .6426 *	* .6947 *	* .7012 *	* .7575 *	* .7380 *	* .6611 *	* .3370 *	
	* 2.6944 *	* 2.5164 *	* 2.5327 *	* 2.3700 *	* 2.4704 *	* 2.7814 *	* 5.4088 *	
14	* .6080 *	* .6719 *	* .6578 *	* .6611 *	* .4606 *	* .3370 *		
	* 2.8483 *	* 2.6127 *	* 2.6825 *	* 2.7118 *	* 3.9301 *	* 5.3950 *		
15	* .3392 *	* .3912 *	* .3414 *	* .3089 *	F-SUB-Q			
	* 5.0794 *	* 4.4187 *	* 5.0947 *	* 5.7042 *	M-SUB-Q			

AT 30% POWER, 4 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* .3457 *	* .2720 *	* .2828 *	* .3143 *	* .2937 *	* .3089 *	* .2623 *	* .1582 *
	* 4.6888 *	* 5.9461 *	* 5.7121 *	* 5.1289 *	* 5.5023 *	* 5.2352 *	* 6.2252 *	* 10.2472 *
9	* .2720 *	* .2872 *	* .3089 *	* .2893 *	* .3143 *	* .2893 *	* .2731 *	* .1680 *
	* 5.9461 *	* 5.6206 *	* 5.2083 *	* 5.5952 *	* 5.1413 *	* 5.6248 *	* 6.0073 *	* 9.6897 *
10	* .2828 *	* .3089 *	* .2850 *	* .3110 *	* .2872 *	* .2785 *	* .2688 *	* .1658 *
	* 5.7121 *	* 5.2153 *	* 5.6762 *	* 5.2573 *	* 5.7345 *	* 6.0117 *	* 6.1343 *	* 9.8978 *
11	* .3143 *	* .2893 *	* .3110 *	* .2991 *	* .3273 *	* .3034 *	* .2568 *	* .1452 *
	* 5.1289 *	* 5.6033 *	* 5.2515 *	* 5.6019 *	* 5.1177 *	* 5.5425 *	* 6.5151 *	* 11.4112 *
12	* .2937 *	* .3143 *	* .2872 *	* .3273 *	* .3121 *	* .3024 *	* .2200 *	
	* 5.5023 *	* 5.1413 *	* 5.7345 *	* 5.1177 *	* 5.4061 *	* 5.6033 *	* 7.7248 *	
13	* .3089 *	* .2893 *	* .2785 *	* .3034 *	* .3024 *	* .2644 *	* .1604 *	
	* 5.2352 *	* 5.6100 *	* 6.0117 *	* 5.5425 *	* 5.6033 *	* 6.4488 *	* 10.5932 *	
14	* .2623 *	* .2731 *	* .2688 *	* .2568 *	* .2200 *	* .1604 *		
	* 6.2252 *	* 5.9997 *	* 6.1343 *	* 6.5151 *	* 7.6969 *	* 10.5932 *		
15	* .1582 *	* .1691 *	* .1658 *	* .1452 *	F-SUB-Q			
	* 10.2472 *	* 9.6458 *	* 9.8520 *	* 11.4112 *	M-SUB-Q			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 229 of 268

TABLE 6

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 3.1431	* 3.9047	* 4.1216	* 3.7889	* 4.3452	* 3.9845	* 4.7705	* 7.3257
	* 3.6518	* 4.5157	* 4.6456	* 4.3293	* 4.7226	* 4.5125	* 5.2386	* 8.0836
	* 4.0472	* 4.8581	* 4.6645	* 4.1833	* 4.5419	* 4.3394	* 5.1443	* 7.8971
	* 3.7319	* 4.4030	* 4.1477	* 3.6522	* 3.9465	* 3.7657	* 4.4730	* 6.6438
	* 3.1797	* 3.6904	* 3.2841	* 2.9104	* 3.1146	* 2.9818	* 3.4881	* 4.8818
9	* 3.9047	* 3.8987	* 3.5793	* 4.2637	* 3.8706	* 4.3823	* 4.3756	* 6.7553
	* 4.5157	* 4.4926	* 4.1881	* 4.7073	* 4.3772	* 4.7985	* 4.9889	* 7.4236
	* 4.8581	* 4.6094	* 4.1838	* 4.5982	* 4.1987	* 4.6677	* 4.8680	* 7.1908
	* 4.4030	* 4.1310	* 3.7073	* 4.0487	* 3.6815	* 4.0877	* 4.2580	* 6.1366
	* 3.6904	* 3.3714	* 2.9929	* 3.1726	* 2.9316	* 3.2399	* 3.3102	* 4.5682
10	* 4.1216	* 3.5812	* 4.1466	* 3.8534	* 4.3749	* 4.5481	* 4.4035	* 6.9449
	* 4.6456	* 4.1796	* 4.6259	* 4.3675	* 4.7621	* 4.9802	* 5.0230	* 7.6455
	* 4.6645	* 4.1835	* 4.5939	* 4.1603	* 4.5916	* 4.9053	* 4.8963	* 7.3891
	* 4.1477	* 3.7034	* 4.0431	* 3.6600	* 4.0679	* 4.4068	* 4.3668	* 6.3983
	* 3.2841	* 2.9930	* 3.2313	* 2.9815	* 3.2903	* 3.5303	* 3.4194	* 4.7184
11	* 3.7889	* 4.2554	* 3.8485	* 4.3477	* 3.8415	* 4.3227	* 4.6724	* 7.8614
	* 4.3293	* 4.7070	* 4.3583	* 4.7311	* 4.3467	* 4.7425	* 5.3166	* 8.6572
	* 4.1833	* 4.5920	* 4.1604	* 4.5567	* 4.1393	* 4.6144	* 5.1771	* 8.3032
	* 3.6522	* 4.0425	* 3.6601	* 4.0331	* 3.6453	* 4.1025	* 4.6011	* 7.1900
	* 2.9104	* 3.1726	* 2.9815	* 3.2607	* 2.9694	* 3.2964	* 3.6624	* 5.4083
12	* 4.3452	* 3.8635	* 4.3695	* 3.8415	* 4.2231	* 4.1998	* 5.6870	*
	* 4.7226	* 4.3804	* 4.7626	* 4.3468	* 4.5919	* 4.7625	* 6.2611	*
	* 4.5419	* 4.1987	* 4.5921	* 4.1394	* 4.3338	* 4.5560	* 6.1110	*
	* 3.9465	* 3.6815	* 4.0683	* 3.6453	* 3.7831	* 4.0083	* 5.4024	*
	* 3.1146	* 2.9316	* 3.2865	* 2.9694	* 2.9939	* 3.1699	* 4.2017	*
13	* 3.9845	* 4.3828	* 4.5478	* 4.3224	* 4.1998	* 4.7206	* 7.4242	*
	* 4.5125	* 4.7989	* 4.9799	* 4.7315	* 4.7625	* 5.3361	* 8.1413	*
	* 4.3394	* 4.6682	* 4.9051	* 4.6138	* 4.5560	* 5.0476	* 7.7129	*
	* 3.7657	* 4.0880	* 4.4066	* 4.1023	* 4.0083	* 4.4101	* 6.6376	*
	* 2.9818	* 3.2399	* 3.5302	* 3.2963	* 3.1699	* 3.4084	* 4.9516	*
14	* 4.7705	* 4.3756	* 4.4035	* 4.6724	* 5.6873	* 7.4237	*	
	* 5.2386	* 4.9889	* 5.0108	* 5.3166	* 6.2613	* 8.1408	*	
	* 5.1443	* 4.8680	* 4.8963	* 5.1771	* 6.1113	* 7.7123	*	
	* 4.4730	* 4.2580	* 4.3668	* 4.6011	* 5.4026	* 6.6372	*	
	* 3.4881	* 3.3102	* 3.4194	* 3.6624	* 4.2018	* 4.9513	*	
15	* 7.3257	* 6.7345	* 6.9456	* 7.8611	* 4 EFPD 118	% POWER		
	* 8.0836	* 7.4058	* 7.6195	* 8.6227	* 50 EFPD 118	% POWER		
	* 7.8971	* 7.1900	* 7.3898	* 8.3028	* 200 EFPD 118	% POWER		
	* 6.6438	* 6.1359	* 6.3990	* 7.1897	* 300 EFPD 118	% POWER		
	* 4.8818	* 4.5618	* 4.7184	* 5.4081	* 470 EFPD 118	% POWER		

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 230 of 268

TABLE 6 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 2.2315	* 1.7934	* 1.9452	* 2.2046	* 2.2478	* 2.2693	* 2.4707	* 3.9284
	* 2.5806	* 2.0540	* 2.1547	* 2.4265	* 2.3731	* 2.4701	* 2.6442	* 4.2579
	* 2.9393	* 2.2611	* 2.2418	* 2.2922	* 2.2452	* 2.3173	* 2.5789	* 4.1883
	* 2.8664	* 2.1992	* 2.1003	* 2.0401	* 2.0389	* 2.0798	* 2.3285	* 3.7000
	* 2.6354	* 2.0592	* 1.8278	* 1.7041	* 1.7647	* 1.7127	* 1.9802	* 2.9832
9	* 1.7934	* 1.8118	* 1.9813	* 2.1656	* 2.1674	* 2.1208	* 2.1376	* 3.3652
	* 2.0540	* 2.0581	* 2.2607	* 2.3045	* 2.3913	* 2.2794	* 2.3653	* 3.6378
	* 2.2611	* 2.2504	* 2.2925	* 2.2090	* 2.2949	* 2.2560	* 2.2961	* 3.5479
	* 2.1992	* 2.1382	* 2.0854	* 2.0316	* 2.0587	* 2.0843	* 2.1127	* 3.1641
	* 2.0592	* 1.9135	* 1.7536	* 1.7598	* 1.7160	* 1.8038	* 1.7904	* 2.5680
10	* 1.9452	* 1.9813	* 2.1351	* 2.2574	* 2.0821	* 2.0788	* 2.1596	* 3.9103
	* 2.1547	* 2.2632	* 2.2876	* 2.4616	* 2.2360	* 2.2462	* 2.3906	* 4.1898
	* 2.2418	* 2.2893	* 2.2149	* 2.2847	* 2.2073	* 2.2574	* 2.3210	* 4.0130
	* 2.1003	* 2.0840	* 2.0539	* 2.0626	* 2.0562	* 2.1447	* 2.1482	* 3.6383
	* 1.8278	* 1.7527	* 1.7957	* 1.7435	* 1.8246	* 1.9240	* 1.8034	* 2.8931
11	* 2.2046	* 2.1642	* 2.2524	* 2.2067	* 2.1474	* 2.1149	* 2.1964	* 4.3329
	* 2.4265	* 2.3030	* 2.4538	* 2.3300	* 2.3782	* 2.2860	* 2.4524	* 4.6472
	* 2.2922	* 2.2063	* 2.2847	* 2.2048	* 2.2522	* 2.2550	* 2.3967	* 4.4609
	* 2.0401	* 2.0316	* 2.0626	* 2.0369	* 2.0559	* 2.1085	* 2.2361	* 4.0465
	* 1.7041	* 1.7598	* 1.7426	* 1.8162	* 1.7573	* 1.8765	* 1.9608	* 3.2880
12	* 2.2478	* 2.1674	* 2.0821	* 2.1452	* 2.1113	* 2.0765	* 3.2261	*
	* 2.3731	* 2.3913	* 2.2360	* 2.3755	* 2.2553	* 2.2935	* 3.4645	*
	* 2.2452	* 2.2933	* 2.2073	* 2.2522	* 2.1432	* 2.1857	* 3.3733	*
	* 2.0389	* 2.0587	* 2.0562	* 2.0559	* 1.9695	* 2.0141	* 3.0964	*
	* 1.7647	* 1.7160	* 1.8245	* 1.7573	* 1.7381	* 1.7432	* 2.6285	*
13	* 2.2693	* 2.1208	* 2.0788	* 2.1147	* 2.0751	* 2.2461	* 4.1252	*
	* 2.4701	* 2.2794	* 2.2462	* 2.2860	* 2.2935	* 2.4810	* 4.4120	*
	* 2.3173	* 2.2562	* 2.2573	* 2.2549	* 2.1857	* 2.3514	* 4.1947	*
	* 2.0798	* 2.0843	* 2.1447	* 2.1078	* 2.0135	* 2.1487	* 3.7707	*
	* 1.7127	* 1.8038	* 1.9240	* 1.8765	* 1.7432	* 1.8357	* 3.0761	*
14	* 2.4707	* 2.1376	* 2.1597	* 2.1971	* 3.2261	* 4.1252	*	*
	* 2.6442	* 2.3654	* 2.3916	* 2.4495	* 3.4646	* 4.4119	*	*
	* 2.5789	* 2.2945	* 2.3210	* 2.3950	* 3.3733	* 4.1943	*	*
	* 2.3285	* 2.1127	* 2.1482	* 2.2361	* 3.0964	* 3.7706	*	*
	* 1.9802	* 1.7905	* 1.8034	* 1.9608	* 2.6305	* 3.0761	*	*
15	* 3.9284	* 3.3618	* 3.9103	* 4.3329	* 4 EFPD 118 % POWER			
	* 4.2579	* 3.6339	* 4.1898	* 4.6408	* 50 EFPD 118 % POWER			
	* 4.1883	* 3.5441	* 4.0130	* 4.4609	* 200 EFPD 118 % POWER			
	* 3.7000	* 3.1647	* 3.6383	* 4.0442	* 300 EFPD 118 % POWER			
	* 2.9832	* 2.5661	* 2.8932	* 3.2880	* 470 EFPD 118 % POWER			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 231 of 268

TABLE 6 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.8872	* 1.4878	* 1.6136	* 1.8186	* 1.8864	* 1.8562	* 2.0378	* 3.2753
	* 2.1852	* 1.7023	* 1.7746	* 1.9580	* 1.9529	* 1.9763	* 2.1544	* 3.4997
	* 2.5541	* 1.9045	* 1.8569	* 1.8383	* 1.8550	* 1.8595	* 2.1241	* 3.4675
	* 2.5359	* 1.8959	* 1.7751	* 1.6723	* 1.7303	* 1.6937	* 1.9786	* 3.1479
	* 2.4202	* 1.8732	* 1.6276	* 1.4938	* 1.5786	* 1.5006	* 1.7647	* 2.6588
9	* 1.4878	* 1.5034	* 1.6206	* 1.8075	* 1.7606	* 1.7461	* 1.7164	* 2.7641
	* 1.7023	* 1.7061	* 1.8257	* 1.8925	* 1.9091	* 1.8564	* 1.8717	* 2.9505
	* 1.9045	* 1.8761	* 1.8418	* 1.8195	* 1.8411	* 1.8673	* 1.8364	* 2.9047
	* 1.8959	* 1.8203	* 1.7138	* 1.7142	* 1.6894	* 1.7700	* 1.7475	* 2.6727
	* 1.8732	* 1.7147	* 1.5347	* 1.5666	* 1.5027	* 1.6103	* 1.5604	* 2.2795
10	* 1.6136	* 1.6227	* 1.7834	* 1.8587	* 1.7095	* 1.6929	* 1.7271	* 3.2543
	* 1.7746	* 1.8278	* 1.8805	* 1.9719	* 1.8170	* 1.8154	* 1.8790	* 3.4275
	* 1.8569	* 1.8407	* 1.8235	* 1.8271	* 1.8204	* 1.8633	* 1.8440	* 3.2990
	* 1.7751	* 1.7118	* 1.7310	* 1.6831	* 1.7363	* 1.8183	* 1.7423	* 3.0653
	* 1.6276	* 1.5333	* 1.5987	* 1.5272	* 1.6286	* 1.7216	* 1.5718	* 2.5656
11	* 1.8186	* 1.8065	* 1.8582	* 1.8302	* 1.7332	* 1.7338	* 1.7460	* 3.5942
	* 1.9580	* 1.8915	* 1.9738	* 1.9018	* 1.8889	* 1.8468	* 1.9189	* 3.7902
	* 1.8383	* 1.8176	* 1.8272	* 1.8129	* 1.8054	* 1.8540	* 1.9053	* 3.6541
	* 1.6723	* 1.7134	* 1.6827	* 1.7147	* 1.6795	* 1.7792	* 1.8276	* 3.3979
	* 1.4938	* 1.5666	* 1.5259	* 1.6221	* 1.5453	* 1.6805	* 1.7107	* 2.9100
12	* 1.8864	* 1.7602	* 1.7095	* 1.7332	* 1.7555	* 1.6678	* 2.6904	*
	* 1.9529	* 1.9091	* 1.8170	* 1.8872	* 1.8339	* 1.8107	* 2.8530	*
	* 1.8550	* 1.8401	* 1.8205	* 1.8054	* 1.7607	* 1.7476	* 2.8017	*
	* 1.7303	* 1.6896	* 1.7366	* 1.6795	* 1.6747	* 1.6534	* 2.6313	*
	* 1.5786	* 1.5020	* 1.6283	* 1.5453	* 1.5828	* 1.5312	* 2.3529	*
13	* 1.8562	* 1.7470	* 1.6929	* 1.7325	* 1.6678	* 1.7838	* 3.4400	*
	* 1.9763	* 1.8580	* 1.8154	* 1.8473	* 1.8107	* 1.9357	* 3.6310	*
	* 1.8595	* 1.8684	* 1.8633	* 1.8540	* 1.7476	* 1.8555	* 3.4756	*
	* 1.6937	* 1.7709	* 1.8178	* 1.7792	* 1.6534	* 1.7490	* 3.2033	*
	* 1.5006	* 1.6109	* 1.7218	* 1.6805	* 1.5312	* 1.6054	* 2.7641	*
14	* 2.0378	* 1.7164	* 1.7257	* 1.7445	* 2.6883	* 3.4399	*	*
	* 2.1544	* 1.8717	* 1.8791	* 1.9171	* 2.8506	* 3.6273	*	*
	* 2.1241	* 1.8365	* 1.8440	* 1.9052	* 2.8016	* 3.4755	*	*
	* 1.9786	* 1.7475	* 1.7418	* 1.8277	* 2.6312	* 3.2034	*	*
	* 1.7647	* 1.5605	* 1.5719	* 1.7098	* 2.3529	* 2.7642	*	*
15	* 3.2753	* 2.7618	* 3.2498	* 3.5943	* 4 EFPD 118 % POWER			
	* 3.4997	* 2.9453	* 3.4275	* 3.7838	* 50 EFPD 118 % POWER			
	* 3.4675	* 2.9020	* 3.2989	* 3.6539	* 200 EFPD 118 % POWER			
	* 3.1479	* 2.6680	* 3.0652	* 3.3979	* 300 EFPD 118 % POWER			
	* 2.6588	* 2.2767	* 2.5656	* 2.9075	* 470 EFPD 118 % POWER			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 232 of 268

TABLE 6 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.7472	* 1.3615	* 1.4633	* 1.6157	* 1.6868	* 1.6334	* 1.8182	* 2.9635
	* 2.0279	* 1.5596	* 1.6008	* 1.7023	* 1.7240	* 1.7027	* 1.9006	* 3.1354
	* 2.3864	* 1.7498	* 1.6602	* 1.5814	* 1.6450	* 1.6099	* 1.8956	* 3.1210
	* 2.3967	* 1.7800	* 1.6177	* 1.4718	* 1.5663	* 1.4917	* 1.8040	* 2.8858
	* 2.3604	* 1.8038	* 1.5387	* 1.4067	* 1.4861	* 1.4155	* 1.6804	* 2.5139
9	* 1.3615	* 1.3733	* 1.4529	* 1.6248	* 1.5546	* 1.5656	* 1.4982	* 2.4841
	* 1.5596	* 1.5576	* 1.6102	* 1.6774	* 1.6583	* 1.6501	* 1.6107	* 2.6215
	* 1.7498	* 1.6920	* 1.5944	* 1.6183	* 1.5877	* 1.6709	* 1.6050	* 2.6010
	* 1.7800	* 1.6789	* 1.5182	* 1.5532	* 1.4900	* 1.6109	* 1.5619	* 2.4498
	* 1.8038	* 1.6276	* 1.4456	* 1.4758	* 1.4141	* 1.5246	* 1.4612	* 2.1697
10	* 1.4633	* 1.4544	* 1.6042	* 1.6364	* 1.5297	* 1.5124	* 1.5049	* 2.9127
	* 1.6008	* 1.6119	* 1.6708	* 1.7032	* 1.6113	* 1.6101	* 1.6133	* 3.0288
	* 1.6602	* 1.5929	* 1.6196	* 1.5720	* 1.6218	* 1.6775	* 1.5938	* 2.9472
	* 1.6177	* 1.5167	* 1.5728	* 1.4852	* 1.5830	* 1.6763	* 1.5504	* 2.8029
	* 1.5387	* 1.4445	* 1.5062	* 1.4385	* 1.5380	* 1.6351	* 1.4766	* 2.4389
11	* 1.6157	* 1.6229	* 1.6374	* 1.6322	* 1.5212	* 1.5355	* 1.5124	* 3.2035
	* 1.7023	* 1.6757	* 1.7027	* 1.6735	* 1.6316	* 1.6218	* 1.6432	* 3.3344
	* 1.5814	* 1.6168	* 1.5728	* 1.6040	* 1.5553	* 1.6450	* 1.6633	* 3.2588
	* 1.4718	* 1.5524	* 1.4849	* 1.5575	* 1.4790	* 1.6190	* 1.6362	* 3.1068
	* 1.4067	* 1.4752	* 1.4373	* 1.5358	* 1.4581	* 1.6020	* 1.6050	* 2.7479
12	* 1.6868	* 1.5554	* 1.5305	* 1.5212	* 1.5468	* 1.4470	* 2.3959	*
	* 1.7240	* 1.6583	* 1.6125	* 1.6316	* 1.5966	* 1.5474	* 2.5132	*
	* 1.6450	* 1.5870	* 1.6217	* 1.5553	* 1.5569	* 1.5160	* 2.5022	*
	* 1.5663	* 1.4900	* 1.5833	* 1.4790	* 1.5214	* 1.4725	* 2.4116	*
	* 1.4861	* 1.4135	* 1.5384	* 1.4581	* 1.5102	* 1.4438	* 2.2482	*
13	* 1.6334	* 1.5663	* 1.5114	* 1.5358	* 1.4470	* 1.5278	* 3.0618	*
	* 1.7027	* 1.6510	* 1.6093	* 1.6210	* 1.5463	* 1.6360	* 3.1894	*
	* 1.6099	* 1.6716	* 1.6768	* 1.6442	* 1.5160	* 1.5954	* 3.0985	*
	* 1.4917	* 1.6107	* 1.6764	* 1.6190	* 1.4725	* 1.5535	* 2.9337	*
	* 1.4155	* 1.5249	* 1.6352	* 1.6014	* 1.4438	* 1.5074	* 2.6506	*
14	* 1.8182	* 1.4983	* 1.5049	* 1.5124	* 2.3935	* 3.0579	*	*
	* 1.9006	* 1.6107	* 1.6138	* 1.6423	* 2.5104	* 3.1895	*	*
	* 1.8956	* 1.6050	* 1.5939	* 1.6633	* 2.5022	* 3.0959	*	*
	* 1.8040	* 1.5619	* 1.5504	* 1.6358	* 2.4116	* 2.9324	*	*
	* 1.6804	* 1.4613	* 1.4766	* 1.6050	* 2.2495	* 2.6509	*	*
15	* 2.9635	* 2.4804	* 2.9125	* 3.1993	* 4 EFPD 118 % POWER			
	* 3.1354	* 2.6174	* 3.0287	* 3.3362	* 50 EFPD 118 % POWER			
	* 3.1210	* 2.5990	* 2.9470	* 3.2587	* 200 EFPD 118 % POWER			
	* 2.8858	* 2.4460	* 2.8027	* 3.1054	* 300 EFPD 118 % POWER			
	* 2.5139	* 2.1671	* 2.4385	* 2.7481	* 470 EFPD 118 % POWER			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 233 of 268

TABLE 6 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.7366	* 1.3417	* 1.4312	* 1.5626	* 1.6245	* 1.5688	* 1.7509	* 2.8903
	* 2.0175	* 1.5290	* 1.5574	* 1.6150	* 1.6399	* 1.6009	* 1.8128	* 3.0262
	* 2.3953	* 1.7316	* 1.5975	* 1.4854	* 1.5662	* 1.5132	* 1.8205	* 3.0237
	* 2.4282	* 1.7916	* 1.5816	* 1.4141	* 1.5252	* 1.4375	* 1.7698	* 2.8458
	* 2.4464	* 1.8486	* 1.5613	* 1.4211	* 1.5011	* 1.4300	* 1.6973	* 2.5517
9	* 1.3417	* 1.3507	* 1.4161	* 1.5732	* 1.4958	* 1.5106	* 1.4309	* 2.4154
	* 1.5290	* 1.5330	* 1.5488	* 1.6065	* 1.5675	* 1.5796	* 1.5138	* 2.5175
	* 1.7316	* 1.6451	* 1.5060	* 1.5467	* 1.4938	* 1.6002	* 1.5245	* 2.5167
	* 1.7916	* 1.6628	* 1.4599	* 1.5144	* 1.4307	* 1.5757	* 1.5136	* 2.4178
	* 1.8486	* 1.6564	* 1.4622	* 1.4918	* 1.4286	* 1.5411	* 1.4719	* 2.2082
10	* 1.4312	* 1.4185	* 1.5552	* 1.5722	* 1.4744	* 1.4549	* 1.4362	* 2.8177
	* 1.5574	* 1.5503	* 1.6027	* 1.6013	* 1.5414	* 1.5402	* 1.5151	* 2.8957
	* 1.5975	* 1.5046	* 1.5504	* 1.4840	* 1.5586	* 1.6273	* 1.5091	* 2.8450
	* 1.5816	* 1.4587	* 1.5401	* 1.4346	* 1.5587	* 1.6640	* 1.5066	* 2.7587
	* 1.5613	* 1.4610	* 1.5230	* 1.4549	* 1.5586	* 1.6607	* 1.4877	* 2.4693
11	* 1.5626	* 1.5714	* 1.5731	* 1.5679	* 1.4563	* 1.4684	* 1.4319	* 3.0921
	* 1.6150	* 1.6050	* 1.6021	* 1.5891	* 1.5350	* 1.5376	* 1.5390	* 3.1862
	* 1.4854	* 1.5452	* 1.4841	* 1.5350	* 1.4640	* 1.5771	* 1.5860	* 3.1539
	* 1.4141	* 1.5138	* 1.4340	* 1.5249	* 1.4275	* 1.5875	* 1.5983	* 3.0577
	* 1.4211	* 1.4919	* 1.4543	* 1.5600	* 1.4784	* 1.6211	* 1.6214	* 2.7745
12	* 1.6245	* 1.4965	* 1.4751	* 1.4563	* 1.4720	* 1.3729	* 2.3005	*
	* 1.6399	* 1.5675	* 1.5421	* 1.5350	* 1.5025	* 1.4416	* 2.3890	*
	* 1.5662	* 1.4930	* 1.5585	* 1.4634	* 1.4883	* 1.4347	* 2.4187	*
	* 1.5252	* 1.4307	* 1.5586	* 1.4275	* 1.4876	* 1.4302	* 2.3815	*
	* 1.5011	* 1.4280	* 1.5590	* 1.4784	* 1.5286	* 1.4597	* 2.2875	*
13	* 1.5688	* 1.5110	* 1.4540	* 1.4677	* 1.3729	* 1.4323	* 2.9440	*
	* 1.6009	* 1.5811	* 1.5391	* 1.5379	* 1.4409	* 1.5164	* 3.0362	*
	* 1.5132	* 1.5999	* 1.6266	* 1.5771	* 1.4347	* 1.5045	* 2.9944	*
	* 1.4375	* 1.5763	* 1.6637	* 1.5872	* 1.4296	* 1.5023	* 2.9028	*
	* 1.4300	* 1.5414	* 1.6609	* 1.6213	* 1.4597	* 1.5214	* 2.6966	*
14	* 1.7509	* 1.4309	* 1.4362	* 1.4313	* 2.3004	* 2.9453	*	
	* 1.8128	* 1.5142	* 1.5151	* 1.5394	* 2.3899	* 3.0363	*	
	* 1.8205	* 1.5245	* 1.5091	* 1.5853	* 2.4187	* 2.9944	*	
	* 1.7698	* 1.5137	* 1.5062	* 1.5979	* 2.3813	* 2.9029	*	
	* 1.6973	* 1.4719	* 1.4877	* 1.6214	* 2.2874	* 2.6969	*	
15	* 2.8903	* 2.4102	* 2.8176	* 3.0921	* 4 EFPD 118 % POWER			
	* 3.0262	* 2.5137	* 2.8969	* 3.1816	* 50 EFPD 118 % POWER			
	* 3.0237	* 2.5132	* 2.8454	* 3.1533	* 200 EFPD 118 % POWER			
	* 2.8458	* 2.4145	* 2.7585	* 3.0579	* 300 EFPD 118 % POWER			
	* 2.5517	* 2.2055	* 2.4689	* 2.7745	* 470 EFPD 118 % POWER			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 234 of 268

TABLE 6 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	1.7703	1.3619	1.4470	1.5706	1.6216	1.5647	1.7467	2.9080
	2.0588	1.5490	1.5697	1.5952	1.6179	1.5740	1.7954	3.0158
	2.4523	1.7557	1.5943	1.4624	1.5507	1.4912	1.8178	3.0356
	2.5009	1.8321	1.5911	1.4126	1.5328	1.4379	1.7891	2.9011
	2.5524	1.9360	1.6251	1.4730	1.5558	1.4807	1.7569	2.6540
9	1.3619	1.3703	1.4318	1.5800	1.4929	1.5053	1.4230	2.4282
	1.5490	1.5592	1.5528	1.5975	1.5439	1.5647	1.4866	2.5042
	1.7557	1.6527	1.4870	1.5340	1.4711	1.5912	1.5126	2.5235
	1.8321	1.6769	1.4581	1.5213	1.4285	1.5889	1.5190	2.4533
	1.9360	1.7298	1.5176	1.5489	1.4805	1.5979	1.5194	2.2968
10	1.4470	1.4329	1.5641	1.5693	1.4679	1.4454	1.4263	2.8243
	1.5697	1.5544	1.5975	1.5743	1.5258	1.5229	1.4843	2.8788
	1.5943	1.4849	1.5342	1.4555	1.5468	1.6274	1.4882	2.8466
	1.5911	1.4569	1.5429	1.4308	1.5701	1.6921	1.5065	2.7865
	1.6251	1.5163	1.5823	1.5101	1.6211	1.7292	1.5363	2.5638
11	1.5706	1.5785	1.5702	1.5618	1.4481	1.4524	1.4181	3.0935
	1.5952	1.5948	1.5751	1.5657	1.4966	1.5114	1.5071	3.1599
	1.4624	1.5326	1.4549	1.5239	1.4441	1.5701	1.5761	3.1463
	1.4126	1.5207	1.4302	1.5419	1.4377	1.6136	1.6170	3.0988
	1.4730	1.5490	1.5088	1.6175	1.5345	1.6837	1.6719	2.8814
12	1.6216	1.4929	1.4694	1.4481	1.4520	1.3549	2.2913	
	1.6179	1.5450	1.5265	1.4956	1.4692	1.4033	2.3628	
	1.5507	1.4705	1.5474	1.4441	1.4760	1.4192	2.4280	
	1.5328	1.4285	1.5697	1.4377	1.5083	1.4449	2.4295	
	1.5558	1.4799	1.6207	1.5347	1.5890	1.5146	2.3817	
13	1.5647	1.5066	1.4445	1.4518	1.3552	1.4085	2.9384	
	1.5740	1.5662	1.5219	1.5104	1.4023	1.4715	3.0023	
	1.4912	1.5918	1.6275	1.5695	1.4186	1.4869	3.0069	
	1.4379	1.5897	1.6923	1.6136	1.4446	1.5167	2.9674	
	1.4807	1.5983	1.7293	1.6836	1.5139	1.5773	2.8183	
14	1.7467	1.4221	1.4264	1.4181	2.2912	2.9397		
	1.7954	1.4855	1.4836	1.5064	2.3611	3.0038		
	1.8178	1.5128	1.4884	1.5753	2.4280	3.0070		
	1.7891	1.5181	1.5066	1.6170	2.4293	2.9664		
	1.7569	1.5194	1.5363	1.6719	2.3816	2.8187		
15	2.9080	2.4229	2.8242	3.0935	4 EFPD 118 % POWER			
	3.0158	2.5005	2.8762	3.1570	50 EFPD 118 % POWER			
	3.0356	2.5196	2.8465	3.1429	200 EFPD 118 % POWER			
	2.9011	2.4500	2.7842	3.0961	300 EFPD 118 % POWER			
	2.6540	2.2938	2.5634	2.8790	470 EFPD 118 % POWER			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 235 of 268

TABLE 6 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.8230	* 1.3959	* 1.4771	* 1.6001	* 1.6368	* 1.5824	* 1.7579	* 2.9374
	* 2.1214	* 1.5822	* 1.5979	* 1.5975	* 1.6213	* 1.5732	* 1.7966	* 3.0359
	* 2.5324	* 1.8002	* 1.6175	* 1.4642	* 1.5600	* 1.4941	* 1.8366	* 3.0753
	* 2.5955	* 1.8708	* 1.6200	* 1.4284	* 1.5566	* 1.4560	* 1.8258	* 2.9662
	* 2.6307	* 1.9804	* 1.6958	* 1.5304	* 1.6164	* 1.5360	* 1.8226	* 2.7602
9	* 1.3959	* 1.4036	* 1.4659	* 1.6034	* 1.5098	* 1.5176	* 1.4338	* 2.4552
	* 1.5822	* 1.5978	* 1.5776	* 1.6088	* 1.5454	* 1.5702	* 1.4830	* 2.5197
	* 1.8002	* 1.6826	* 1.4947	* 1.5459	* 1.4716	* 1.6068	* 1.5257	* 2.5594
	* 1.8708	* 1.7093	* 1.4734	* 1.5426	* 1.4439	* 1.6176	* 1.5372	* 2.5020
	* 1.9804	* 1.8048	* 1.5775	* 1.6119	* 1.5371	* 1.6594	* 1.5703	* 2.3851
10	* 1.4771	* 1.4674	* 1.5892	* 1.5899	* 1.4790	* 1.4512	* 1.4372	* 2.8547
	* 1.5979	* 1.5796	* 1.6123	* 1.5750	* 1.5300	* 1.5246	* 1.4780	* 2.8882
	* 1.6175	* 1.4925	* 1.5454	* 1.4534	* 1.5585	* 1.6486	* 1.4931	* 2.8830
	* 1.6200	* 1.4721	* 1.5606	* 1.4408	* 1.5896	* 1.7211	* 1.5216	* 2.8303
	* 1.6958	* 1.5761	* 1.6485	* 1.5705	* 1.6893	* 1.8000	* 1.5884	* 2.6618
11	* 1.6001	* 1.6019	* 1.5896	* 1.5749	* 1.4603	* 1.4545	* 1.4263	* 3.1250
	* 1.5975	* 1.6065	* 1.5758	* 1.5664	* 1.4853	* 1.5013	* 1.5016	* 3.1700
	* 1.4642	* 1.5453	* 1.4528	* 1.5296	* 1.4389	* 1.5746	* 1.5849	* 3.1788
	* 1.4284	* 1.5420	* 1.4402	* 1.5592	* 1.4568	* 1.6453	* 1.6408	* 3.1395
	* 1.5304	* 1.6112	* 1.5698	* 1.6702	* 1.5805	* 1.7332	* 1.7100	* 2.9888
12	* 1.6368	* 1.5098	* 1.4803	* 1.4603	* 1.4515	* 1.3612	* 2.3073	*
	* 1.6213	* 1.5461	* 1.5307	* 1.4857	* 1.4584	* 1.3900	* 2.3640	*
	* 1.5600	* 1.4708	* 1.5592	* 1.4389	* 1.4760	* 1.4194	* 2.4494	*
	* 1.5566	* 1.4433	* 1.5892	* 1.4568	* 1.5348	* 1.4673	* 2.4826	*
	* 1.6164	* 1.5371	* 1.6896	* 1.5805	* 1.6335	* 1.5572	* 2.4544	*
13	* 1.5824	* 1.5190	* 1.4515	* 1.4536	* 1.3604	* 1.4130	* 2.9664	*
	* 1.5732	* 1.5717	* 1.5250	* 1.5006	* 1.3900	* 1.4575	* 3.0124	*
	* 1.4941	* 1.6075	* 1.6477	* 1.5747	* 1.4194	* 1.4907	* 3.0427	*
	* 1.4560	* 1.6184	* 1.7213	* 1.6454	* 1.4671	* 1.5438	* 3.0422	*
	* 1.5360	* 1.6590	* 1.8002	* 1.7334	* 1.5572	* 1.6244	* 2.9180	*
14	* 1.7579	* 1.4339	* 1.4373	* 1.4254	* 2.3072	* 2.9676	*	*
	* 1.7966	* 1.4830	* 1.4770	* 1.5009	* 2.3639	* 3.0084	*	*
	* 1.8366	* 1.5250	* 1.4933	* 1.5840	* 2.4472	* 3.0400	*	*
	* 1.8258	* 1.5372	* 1.5216	* 1.6400	* 2.4825	* 3.0426	*	*
	* 1.8226	* 1.5696	* 1.5884	* 1.7100	* 2.4542	* 2.9178	*	*
15	* 2.9374	* 2.4489	* 2.8526	* 3.1250	* 4 EFPD 118 % POWER			
	* 3.0359	* 2.5130	* 2.8881	* 3.1671	* 50 EFPD 118 % POWER			
	* 3.0753	* 2.5558	* 2.8829	* 3.1796	* 200 EFPD 118 % POWER			
	* 2.9662	* 2.4985	* 2.8299	* 3.1368	* 300 EFPD 118 % POWER			
	* 2.7602	* 2.3819	* 2.6613	* 2.9890	* 470 EFPD 118 % POWER			

CNEI-0400-24
Appendix A, Rev. 18
Page 236 of 268

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

	H	G	F	E	D	C	B	A

8	* 1.9358	* 1.4751	* 1.5538	* 1.6679	* 1.6989	* 1.6341	* 1.8193	* 3.0495 *
*	2.2532	* 1.6689	* 1.6786	* 1.6466	* 1.6803	* 1.6170	* 1.8595	* 3.1484 *
*	2.6843	* 1.8929	* 1.6816	* 1.5033	* 1.6131	* 1.5335	* 1.9034	* 3.1941 *
*	2.7512	* 1.9708	* 1.6916	* 1.4810	* 1.6236	* 1.5121	* 1.9109	* 3.1087 *
*	2.7560	* 2.0774	* 1.7868	* 1.6142	* 1.7074	* 1.6167	* 1.9247	* 2.9063 *

9	* 1.4751	* 1.4818	* 1.5363	* 1.6727	* 1.5613	* 1.5738	* 1.4785	* 2.5520 *
*	1.6689	* 1.6824	* 1.6489	* 1.6722	* 1.5933	* 1.6282	* 1.5235	* 2.6160 *
*	1.8929	* 1.7575	* 1.5413	* 1.6018	* 1.5126	* 1.6650	* 1.5742	* 2.6562 *
*	1.9708	* 1.7908	* 1.5272	* 1.6087	* 1.4970	* 1.6924	* 1.5963	* 2.6196 *
*	2.0774	* 1.8970	* 1.6623	* 1.7016	* 1.6219	* 1.7543	* 1.6469	* 2.5209 *

10	* 1.5538	* 1.5380	* 1.6624	* 1.6483	* 1.5362	* 1.5047	* 1.4813	* 2.9597 *
*	1.6786	* 1.6497	* 1.6788	* 1.6231	* 1.5865	* 1.5799	* 1.5160	* 2.9950 *
*	1.6816	* 1.5401	* 1.6078	* 1.5018	* 1.6271	* 1.7253	* 1.5426	* 2.9959 *
*	1.6916	* 1.5258	* 1.6288	* 1.4949	* 1.6592	* 1.7970	* 1.5797	* 2.9446 *
*	1.7868	* 1.6616	* 1.7398	* 1.6569	* 1.7747	* 1.8957	* 1.6660	* 2.8041 *

11	* 1.6679	* 1.6710	* 1.6493	* 1.6403	* 1.5117	* 1.5056	* 1.4708	* 3.2487 *
*	1.6466	* 1.6706	* 1.6231	* 1.6240	* 1.5244	* 1.5486	* 1.5408	* 3.2878 *
*	1.5033	* 1.6004	* 1.5001	* 1.5948	* 1.4873	* 1.6386	* 1.6436	* 3.3152 *
*	1.4810	* 1.6080	* 1.4942	* 1.6229	* 1.5061	* 1.7135	* 1.6996	* 3.2735 *
*	1.6142	* 1.7006	* 1.6563	* 1.7359	* 1.6418	* 1.8051	* 1.7690	* 3.1174 *

12	* 1.6989	* 1.5621	* 1.5376	* 1.5117	* 1.5047	* 1.4080	* 2.3964	*
*	1.6803	* 1.5933	* 1.5880	* 1.5244	* 1.5040	* 1.4255	* 2.4460	*
*	1.6131	* 1.5119	* 1.6279	* 1.4873	* 1.5335	* 1.4695	* 2.5523	*
*	1.6236	* 1.4963	* 1.6596	* 1.5061	* 1.5999	* 1.5248	* 2.5832	*
*	1.7074	* 1.6215	* 1.7751	* 1.6418	* 1.7042	* 1.6214	* 2.5572	*

13	* 1.6341	* 1.5753	* 1.5040	* 1.5046	* 1.4080	* 1.4600	* 3.0903	*
*	1.6170	* 1.6298	* 1.5792	* 1.5478	* 1.4255	* 1.4919	* 3.1199	*
*	1.5335	* 1.6656	* 1.7255	* 1.6378	* 1.4696	* 1.5403	* 3.1683	*
*	1.5121	* 1.6917	* 1.7972	* 1.7135	* 1.5248	* 1.6097	* 3.1879	*
*	1.6167	* 1.7548	* 1.8960	* 1.8043	* 1.6214	* 1.6963	* 3.0592	*

14	* 1.8193	* 1.4775	* 1.4814	* 1.4702	* 2.3938	* 3.0876	*	
*	1.8595	* 1.5224	* 1.5153	* 1.5401	* 2.4459	* 3.1200	*	
*	1.9034	* 1.5742	* 1.5426	* 1.6438	* 2.5521	* 3.1687	*	
*	1.9109	* 1.5963	* 1.5797	* 1.6987	* 2.5830	* 3.1883	*	
*	1.9247	* 1.6470	* 1.6653	* 1.7690	* 2.5570	* 3.0596	*	

15	* 3.0495	* 2.5481	* 2.9609	* 3.2440	* 4 EFPD	118 % POWER		
*	3.1484	* 2.6119	* 2.9908	* 3.2880	* 50 EFPD	118 % POWER		
*	3.1941	* 2.6523	* 2.9956	* 3.3123	* 200 EFPD	118 % POWER		
*	3.1087	* 2.6153	* 2.9441	* 3.2704	* 300 EFPD	118 % POWER		
*	2.9063	* 2.5174	* 2.8036	* 3.1176	* 470 EFPD			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 237 of 268

TABLE 6 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 2.0718	* 1.5681	* 1.6426	* 1.7574	* 1.7789	* 1.7104	* 1.8974	* 3.1818
	* 2.4129	* 1.7692	* 1.7736	* 1.7176	* 1.7532	* 1.6829	* 1.9349	* 3.2779
	* 2.8612	* 2.0049	* 1.7695	* 1.5695	* 1.6892	* 1.5984	* 1.9938	* 3.3542
	* 2.9225	* 2.0874	* 1.7870	* 1.5603	* 1.7133	* 1.5928	* 2.0177	* 3.2806
	* 2.9257	* 2.1789	* 1.8899	* 1.7026	* 1.8027	* 1.7075	* 2.0262	* 3.0644
9	* 1.5681	* 1.5728	* 1.6253	* 1.7599	* 1.6339	* 1.6452	* 1.5429	* 2.6672
	* 1.7692	* 1.7830	* 1.7395	* 1.7503	* 1.6602	* 1.7001	* 1.5822	* 2.7238
	* 2.0049	* 1.8543	* 1.6133	* 1.6794	* 1.5790	* 1.7452	* 1.6453	* 2.7855
	* 2.0874	* 1.8888	* 1.6071	* 1.6979	* 1.5754	* 1.7848	* 1.6762	* 2.7593
	* 2.1789	* 1.9870	* 1.7498	* 1.7970	* 1.7115	* 1.8496	* 1.7348	* 2.6549
10	* 1.6426	* 1.6271	* 1.7498	* 1.7301	* 1.6060	* 1.5705	* 1.5449	* 3.0928
	* 1.7736	* 1.7390	* 1.7612	* 1.6953	* 1.6607	* 1.6520	* 1.5754	* 3.1191
	* 1.7695	* 1.6106	* 1.6840	* 1.5642	* 1.7071	* 1.8136	* 1.6068	* 3.1343
	* 1.7870	* 1.6056	* 1.7140	* 1.5717	* 1.7496	* 1.9010	* 1.6528	* 3.0894
	* 1.8899	* 1.7480	* 1.8243	* 1.7319	* 1.8522	* 1.9814	* 1.7468	* 2.9412
11	* 1.7574	* 1.7567	* 1.7312	* 1.7205	* 1.5796	* 1.5690	* 1.5331	* 3.4034
	* 1.7176	* 1.7485	* 1.6962	* 1.7015	* 1.5936	* 1.6173	* 1.6034	* 3.4334
	* 1.5695	* 1.6778	* 1.5635	* 1.6803	* 1.5621	* 1.7276	* 1.7199	* 3.4628
	* 1.5603	* 1.6972	* 1.5702	* 1.7159	* 1.5836	* 1.8030	* 1.7880	* 3.4445
	* 1.7026	* 1.7961	* 1.7311	* 1.8183	* 1.7203	* 1.8865	* 1.8470	* 3.2406
12	* 1.7789	* 1.6352	* 1.6079	* 1.5796	* 1.5780	* 1.4721	* 2.5039	*
	* 1.7532	* 1.6611	* 1.6623	* 1.5936	* 1.5798	* 1.4916	* 2.5610	*
	* 1.6892	* 1.5779	* 1.7082	* 1.5621	* 1.6235	* 1.5521	* 2.6905	*
	* 1.7133	* 1.5746	* 1.7500	* 1.5836	* 1.6893	* 1.5980	* 2.7141	*
	* 1.8027	* 1.7104	* 1.8527	* 1.7203	* 1.7869	* 1.6952	* 2.6650	*
13	* 1.7104	* 1.6468	* 1.5697	* 1.5690	* 1.4711	* 1.5269	* 3.2388	*
	* 1.6829	* 1.7031	* 1.6512	* 1.6165	* 1.4905	* 1.5563	* 3.2691	*
	* 1.5984	* 1.7460	* 1.8137	* 1.7268	* 1.5510	* 1.6253	* 3.3547	*
	* 1.5928	* 1.7853	* 1.9012	* 1.8031	* 1.5980	* 1.6854	* 3.3421	*
	* 1.7075	* 1.8502	* 1.9817	* 1.8867	* 1.6952	* 1.7687	* 3.1850	*
14	* 1.8974	* 1.5418	* 1.5450	* 1.5331	* 2.5039	* 3.2359	*	*
	* 1.9349	* 1.5810	* 1.5742	* 1.6026	* 2.5580	* 3.2709	*	*
	* 1.9938	* 1.6441	* 1.6057	* 1.7186	* 2.6903	* 3.3518	*	*
	* 2.0177	* 1.6751	* 1.6530	* 1.7880	* 2.7140	* 3.3426	*	*
	* 2.0262	* 1.7350	* 1.7469	* 1.8461	* 2.6648	* 3.1830	*	*
15	* 3.1818	* 2.6608	* 3.0926	* 3.3983	* 4 EFPD 118 % POWER			
	* 3.2779	* 2.7193	* 3.1165	* 3.4283	* 50 EFPD 118 % POWER			
	* 3.3542	* 2.7812	* 3.1337	* 3.4630	* 200 EFPD 118 % POWER			
	* 3.2806	* 2.7551	* 3.0888	* 3.4456	* 300 EFPD 118 % POWER			
	* 3.0644	* 2.6509	* 2.9407	* 3.2409	* 470 EFPD 118 % POWER			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 238 of 268

TABLE 6 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 2.2599	* 1.7074	* 1.7771	* 1.8880	* 1.9010	* 1.8269	* 2.0199	* 3.4043
	* 2.6314	* 1.9139	* 1.9130	* 1.8343	* 1.8677	* 1.7927	* 2.0542	* 3.4961
	* 3.1349	* 2.1905	* 1.9233	* 1.7023	* 1.8292	* 1.7309	* 2.1560	* 3.6316
	* 3.2078	* 2.2763	* 1.9509	* 1.7002	* 1.8674	* 1.7324	* 2.1902	* 3.5703
	* 3.1600	* 2.3505	* 2.0442	* 1.8425	* 1.9590	* 1.8446	* 2.1915	* 3.3154
9	* 1.7074	* 1.7095	* 1.7601	* 1.8912	* 1.7490	* 1.7581	* 1.6464	* 2.8458
	* 1.9139	* 1.9272	* 1.8692	* 1.8711	* 1.7750	* 1.8148	* 1.6839	* 2.9012
	* 2.1905	* 2.0198	* 1.7525	* 1.8208	* 1.7109	* 1.8907	* 1.7791	* 3.0101
	* 2.2763	* 2.0611	* 1.7507	* 1.8526	* 1.7151	* 1.9439	* 1.8164	* 2.9869
	* 2.3505	* 2.1462	* 1.8826	* 1.9519	* 1.8485	* 2.0064	* 1.8622	* 2.8587
10	* 1.7771	* 1.7628	* 1.8869	* 1.8602	* 1.7239	* 1.6830	* 1.6521	* 3.3036
	* 1.9130	* 1.8659	* 1.8872	* 1.8194	* 1.7797	* 1.7683	* 1.6811	* 3.3205
	* 1.9233	* 1.7493	* 1.8263	* 1.6974	* 1.8511	* 1.9658	* 1.7365	* 3.3900
	* 1.9509	* 1.7491	* 1.8649	* 1.7073	* 1.9024	* 2.0650	* 1.7858	* 3.3499
	* 2.0442	* 1.8804	* 1.9699	* 1.8598	* 1.9987	* 2.1282	* 1.8634	* 3.1550
11	* 1.8880	* 1.8891	* 1.8615	* 1.8543	* 1.6974	* 1.6840	* 1.6450	* 3.6357
	* 1.8343	* 1.8690	* 1.8204	* 1.8310	* 1.7168	* 1.7355	* 1.7155	* 3.6601
	* 1.7023	* 1.8203	* 1.6965	* 1.8208	* 1.6921	* 1.8671	* 1.8593	* 3.7553
	* 1.7002	* 1.8517	* 1.7054	* 1.8656	* 1.7303	* 1.9649	* 1.9378	* 3.7236
	* 1.8425	* 1.9507	* 1.8588	* 1.9632	* 1.8561	* 2.0357	* 1.9700	* 3.4687
12	* 1.9010	* 1.7501	* 1.7257	* 1.6974	* 1.7046	* 1.5869	* 2.6971	
	* 1.8677	* 1.7760	* 1.7802	* 1.7154	* 1.7026	* 1.6072	* 2.7497	
	* 1.8292	* 1.7113	* 1.8520	* 1.6921	* 1.7589	* 1.6788	* 2.9127	
	* 1.8674	* 1.7142	* 1.9018	* 1.7303	* 1.8448	* 1.7404	* 2.9590	
	* 1.9590	* 1.8475	* 1.9980	* 1.8561	* 1.9344	* 1.8223	* 2.8712	
13	* 1.8269	* 1.7600	* 1.6817	* 1.6831	* 1.5869	* 1.6515	* 3.4965	
	* 1.7927	* 1.8168	* 1.7673	* 1.7346	* 1.6066	* 1.6761	* 3.5242	
	* 1.7309	* 1.8921	* 1.9658	* 1.8671	* 1.6788	* 1.7595	* 3.6295	
	* 1.7324	* 1.9431	* 2.0653	* 1.9638	* 1.7404	* 1.8338	* 3.6436	
	* 1.8446	* 2.0072	* 2.1284	* 2.0358	* 1.8222	* 1.9009	* 3.4321	
14	* 2.0199	* 1.6465	* 1.6508	* 1.6437	* 2.6938	* 3.4984		
	* 2.0542	* 1.6844	* 1.6798	* 1.7160	* 2.7462	* 3.5187		
	* 2.1560	* 1.7782	* 1.7352	* 1.8598	* 2.9125	* 3.6300		
	* 2.1902	* 1.8164	* 1.7858	* 1.9364	* 2.9588	* 3.6401		
	* 2.1915	* 1.8623	* 1.8634	* 1.9688	* 2.8710	* 3.4326		
15	* 3.4043	* 2.8421	* 3.3034	* 3.6358	* 4 EFPD 118 % POWER			
	* 3.4961	* 2.8924	* 3.3153	* 3.6623	* 50 EFPD 118 % POWER			
	* 3.6316	* 3.0051	* 3.3913	* 3.7495	* 200 EFPD 118 % POWER			
	* 3.5703	* 2.9845	* 3.3493	* 3.7187	* 300 EFPD 118 % POWER			
	* 3.3154	* 2.8550	* 3.1544	* 3.4689	* 470 EFPD 118 % POWER			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 239 of 268

TABLE 6 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 2.4408	* 1.8379	* 1.9016	* 1.9864	* 2.0036	* 1.9139	* 2.1201	* 3.5654
	* 2.7941	* 2.0391	* 2.0319	* 1.9203	* 1.9635	* 1.8715	* 2.1533	* 3.6562
	* 3.3361	* 2.3535	* 2.0618	* 1.8073	* 1.9541	* 1.8325	* 2.2939	* 3.8549
	* 3.4392	* 2.4496	* 2.1084	* 1.8274	* 2.0131	* 1.8573	* 2.3585	* 3.8330
	* 3.3748	* 2.5152	* 2.1816	* 1.9670	* 2.0949	* 1.9689	* 2.3378	* 3.5337
9	* 1.8379	* 1.8397	* 1.8762	* 2.0063	* 1.8417	* 1.8553	* 1.7264	* 2.9905
	* 2.0391	* 2.0517	* 1.9658	* 1.9730	* 1.8604	* 1.9143	* 1.7558	* 3.0395
	* 2.3535	* 2.1691	* 1.8640	* 1.9480	* 1.8180	* 2.0185	* 1.8836	* 3.2000
	* 2.4496	* 2.2279	* 1.8810	* 1.9986	* 1.8412	* 2.0910	* 1.9398	* 3.2103
	* 2.5152	* 2.2929	* 2.0051	* 2.0829	* 1.9715	* 2.1390	* 1.9680	* 3.0382
10	* 1.9016	* 1.8791	* 2.0062	* 1.9698	* 1.8280	* 1.7826	* 1.7296	* 3.4724
	* 2.0319	* 1.9622	* 1.9955	* 1.9159	* 1.8835	* 1.8695	* 1.7576	* 3.4753
	* 2.0618	* 1.8624	* 1.9616	* 1.8109	* 1.9927	* 2.1216	* 1.8422	* 3.6046
	* 2.1084	* 1.8789	* 2.0094	* 1.8299	* 2.0487	* 2.2182	* 1.9030	* 3.5742
	* 2.1816	* 2.0041	* 2.1022	* 1.9810	* 2.1304	* 2.2579	* 1.9667	* 3.3290
11	* 1.9864	* 2.0027	* 1.9712	* 1.9707	* 1.7886	* 1.7777	* 1.7299	* 3.8399
	* 1.9203	* 1.9707	* 1.9159	* 1.9371	* 1.8000	* 1.8276	* 1.7987	* 3.8514
	* 1.8073	* 1.9474	* 1.8099	* 1.9642	* 1.8076	* 2.0045	* 1.9833	* 4.0007
	* 1.8274	* 1.9975	* 1.8289	* 2.0063	* 1.8511	* 2.1092	* 2.0617	* 3.9735
	* 1.9670	* 2.0832	* 1.9811	* 2.0890	* 1.9662	* 2.1535	* 2.0711	* 3.6654
12	* 2.0036	* 1.8428	* 1.8305	* 1.7886	* 1.8021	* 1.6682	* 2.8514	*
	* 1.9635	* 1.8621	* 1.8860	* 1.8000	* 1.7961	* 1.6841	* 2.8974	*
	* 1.9541	* 1.8166	* 1.9937	* 1.8076	* 1.8899	* 1.7936	* 3.1160	*
	* 2.0131	* 1.8402	* 2.0493	* 1.8511	* 1.9872	* 1.8638	* 3.1609	*
	* 2.0949	* 1.9702	* 2.1311	* 1.9662	* 2.0527	* 1.9288	* 3.0296	*
13	* 1.9139	* 1.8589	* 1.7816	* 1.7781	* 1.6682	* 1.7371	* 3.6977	*
	* 1.8715	* 1.9165	* 1.8680	* 1.8266	* 1.6841	* 1.7528	* 3.7113	*
	* 1.8325	* 2.0196	* 2.1198	* 2.0029	* 1.7936	* 1.8741	* 3.8807	*
	* 1.8573	* 2.0917	* 2.2185	* 2.1093	* 1.8638	* 1.9673	* 3.8981	*
	* 1.9689	* 2.1398	* 2.2578	* 2.1523	* 1.9288	* 2.0108	* 3.6375	*
14	* 2.1201	* 1.7265	* 1.7296	* 1.7304	* 2.8477	* 3.6918	*	*
	* 2.1533	* 1.7558	* 1.7567	* 1.7971	* 2.8973	* 3.7115	*	*
	* 2.2939	* 1.8841	* 1.8422	* 1.9839	* 3.1158	* 3.8832	*	*
	* 2.3585	* 1.9384	* 1.9030	* 2.0601	* 3.1606	* 3.8987	*	*
	* 2.3378	* 1.9668	* 1.9667	* 2.0711	* 3.0294	* 3.6339	*	*
15	* 3.5654	* 2.9825	* 3.4669	* 3.8334	* 4 EFPD	118 % POWER		
	* 3.6562	* 3.0340	* 3.4770	* 3.8450	* 50 EFPD	118 % POWER		
	* 3.8549	* 3.1942	* 3.5985	* 4.0010	* 200 EFPD	118 % POWER		
	* 3.8330	* 3.2038	* 3.5735	* 3.9678	* 300 EFPD	118 % POWER		
	* 3.5337	* 3.0330	* 3.3285	* 3.6615	* 470 EFPD	118 % POWER		

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 240 of 268

TABLE 6 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 2.5124	* 1.8983	* 1.9631	* 2.0468	* 2.0676	* 1.9797	* 2.2162	* 3.7621
	* 2.8614	* 2.0781	* 2.0643	* 1.9465	* 1.9961	* 1.9080	* 2.2249	* 3.8203
	* 3.4685	* 2.4297	* 2.1180	* 1.8567	* 2.0175	* 1.9088	* 2.4262	* 4.1250
	* 3.7140	* 2.6184	* 2.2442	* 1.9550	* 2.1592	* 2.0137	* 2.5766	* 4.1546
	* 3.5698	* 2.6583	* 2.3157	* 2.1004	* 2.2392	* 2.1241	* 2.5421	* 3.8422
9	* 1.8983	* 1.8994	* 1.9304	* 2.0686	* 1.9102	* 1.9334	* 1.8034	* 3.1660
	* 2.0781	* 2.0898	* 1.9933	* 2.0076	* 1.9068	* 1.9708	* 1.8132	* 3.1939
	* 2.4297	* 2.2305	* 1.9129	* 2.0098	* 1.8794	* 2.1123	* 1.9953	* 3.4462
	* 2.6184	* 2.3702	* 2.0086	* 2.1401	* 1.9808	* 2.2699	* 2.1173	* 3.4981
	* 2.6583	* 2.4282	* 2.1349	* 2.2213	* 2.1111	* 2.3052	* 2.1288	* 3.2934
10	* 1.9631	* 1.9316	* 2.0684	* 2.0434	* 1.9085	* 1.8667	* 1.8066	* 3.6802
	* 2.0643	* 1.9895	* 2.0303	* 1.9598	* 1.9444	* 1.9378	* 1.8199	* 3.6557
	* 2.1180	* 1.9107	* 2.0251	* 1.8696	* 2.0734	* 2.2407	* 1.9658	* 3.8795
	* 2.2442	* 2.0062	* 2.1569	* 1.9704	* 2.2152	* 2.4270	* 2.0791	* 3.8887
	* 2.3157	* 2.1323	* 2.2393	* 2.1192	* 2.2843	* 2.4516	* 2.1258	* 3.6040
11	* 2.0468	* 2.0660	* 2.0449	* 2.0646	* 1.8698	* 1.8691	* 1.8204	* 4.0745
	* 1.9465	* 2.0052	* 1.9610	* 2.0046	* 1.8833	* 1.9149	* 1.8747	* 4.0542
	* 1.8567	* 2.0075	* 1.8674	* 2.0446	* 1.9199	* 2.1603	* 2.1235	* 4.3148
	* 1.9550	* 2.1389	* 1.9692	* 2.1718	* 2.0254	* 2.3070	* 2.2491	* 4.3136
	* 2.1004	* 2.2214	* 2.1179	* 2.2443	* 2.1368	* 2.3346	* 2.2373	* 3.9636
12	* 2.0676	* 1.9113	* 1.9107	* 1.8698	* 1.9090	* 1.7684	* 3.0241	*
	* 1.9961	* 1.9080	* 1.9453	* 1.8833	* 1.8819	* 1.7732	* 3.0551	*
	* 2.0175	* 1.8794	* 2.0745	* 1.9199	* 2.0321	* 1.9349	* 3.3832	*
	* 2.1592	* 1.9808	* 2.2160	* 2.0254	* 2.1757	* 2.0292	* 3.4439	*
	* 2.2392	* 2.1112	* 2.2851	* 2.1368	* 2.2308	* 2.0844	* 3.2757	*
13	* 1.9797	* 1.9357	* 1.8657	* 1.8681	* 1.7684	* 1.8587	* 3.9568	*
	* 1.9080	* 1.9732	* 1.9368	* 1.9138	* 1.7722	* 1.8666	* 3.9664	*
	* 1.9088	* 2.1134	* 2.2408	* 2.1590	* 1.9349	* 2.0394	* 4.2261	*
	* 2.0137	* 2.2707	* 2.4251	* 2.3051	* 2.0293	* 2.1356	* 4.2379	*
	* 2.1241	* 2.3062	* 2.4503	* 2.3349	* 2.0844	* 2.1645	* 3.9266	*
14	* 2.2162	* 1.8034	* 1.8066	* 1.8194	* 3.0240	* 3.9593	*	*
	* 2.2249	* 1.8132	* 1.8188	* 1.8735	* 3.0550	* 3.9672	*	*
	* 2.4262	* 1.9953	* 1.9658	* 2.1235	* 3.3830	* 4.2213	*	*
	* 2.5766	* 2.1173	* 2.0791	* 2.2495	* 3.4436	* 4.2385	*	*
	* 2.5421	* 2.1289	* 2.1259	* 2.2373	* 3.2755	* 3.9224	*	*
15	* 3.7621	* 3.1571	* 3.6760	* 4.0746	* 4 EFPD	118 % POWER		
	* 3.8203	* 3.1848	* 3.6555	* 4.0545	* 50 EFPD	118 % POWER		
	* 4.1250	* 3.4430	* 3.8788	* 4.3071	* 200 EFPD	118 % POWER		
	* 4.1546	* 3.4911	* 3.8880	* 4.3139	* 300 EFPD	118 % POWER		
	* 3.8422	* 3.2905	* 3.6033	* 3.9638	* 470 EFPD	118 % POWER		

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 241 of 268

TABLE 6 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 2.5409	* 1.9229	* 1.9871	* 2.0637	* 2.0827	* 1.9950	* 2.2262	* 3.7922
	* 2.8663	* 2.1008	* 2.0855	* 1.9634	* 2.0089	* 1.9196	* 2.2305	* 3.8425
	* 3.4974	* 2.4541	* 2.1517	* 1.8845	* 2.0454	* 1.9361	* 2.4556	* 4.1881
	* 3.7140	* 2.6426	* 2.2609	* 1.9652	* 2.1714	* 2.0246	* 2.5959	* 4.2654
	* 3.5606	* 2.6473	* 2.3039	* 2.0834	* 2.2240	* 2.1041	* 2.5199	* 3.8425
9	* 1.9229	* 1.9240	* 1.9530	* 2.0901	* 1.9232	* 1.9432	* 1.8122	* 3.1866
	* 2.1008	* 2.1102	* 2.0109	* 2.0230	* 1.9195	* 1.9810	* 1.8225	* 3.2118
	* 2.4541	* 2.2647	* 1.9436	* 2.0388	* 1.9080	* 2.1427	* 2.0238	* 3.4976
	* 2.6426	* 2.3904	* 2.0205	* 2.1537	* 1.9925	* 2.2844	* 2.1469	* 3.5880
	* 2.6473	* 2.4169	* 2.1185	* 2.2103	* 2.0953	* 2.2902	* 2.1291	* 3.3006
10	* 1.9871	* 1.9557	* 2.0912	* 2.0605	* 1.9213	* 1.8759	* 1.8161	* 3.7067
	* 2.0855	* 2.0071	* 2.0473	* 1.9756	* 1.9575	* 1.9486	* 1.8283	* 3.6819
	* 2.1517	* 1.9402	* 2.0558	* 1.8990	* 2.1069	* 2.2782	* 1.9935	* 3.9426
	* 2.2609	* 2.0180	* 2.1708	* 1.9831	* 2.2341	* 2.4497	* 2.1242	* 4.0058
	* 2.3039	* 2.1160	* 2.2299	* 2.1059	* 2.2773	* 2.4393	* 2.1333	* 3.6244
11	* 2.0637	* 2.0875	* 2.0620	* 2.0821	* 1.8812	* 1.8773	* 1.8291	* 4.1071
	* 1.9634	* 2.0206	* 1.9769	* 2.0197	* 1.8946	* 1.9235	* 1.8836	* 4.0878
	* 1.8845	* 2.0364	* 1.8968	* 2.0772	* 1.9510	* 2.1934	* 2.1574	* 4.4064
	* 1.9652	* 2.1525	* 1.9807	* 2.1900	* 2.0566	* 2.3696	* 2.3068	* 4.4832
	* 2.0834	* 2.2089	* 2.1047	* 2.2391	* 2.1451	* 2.3621	* 2.2642	* 4.0052
12	* 2.0827	* 1.9244	* 1.9225	* 1.8812	* 1.9197	* 1.7786	* 3.0477	*
	* 2.0089	* 1.9206	* 1.9584	* 1.8946	* 1.8922	* 1.7822	* 3.0764	*
	* 2.0454	* 1.9069	* 2.1080	* 1.9522	* 2.0651	* 1.9654	* 3.4460	*
	* 2.1714	* 1.9913	* 2.2334	* 2.0566	* 2.2320	* 2.1067	* 3.5755	*
	* 2.2240	* 2.0940	* 2.2764	* 2.1451	* 2.2622	* 2.1346	* 3.3380	*
13	* 1.9950	* 1.9466	* 1.8748	* 1.8773	* 1.7776	* 1.8713	* 4.0157	*
	* 1.9196	* 1.9834	* 1.9476	* 1.9224	* 1.7812	* 1.8743	* 4.0025	*
	* 1.9361	* 2.1439	* 2.2783	* 2.1935	* 1.9654	* 2.0903	* 4.3531	*
	* 2.0246	* 2.2853	* 2.4500	* 2.3680	* 2.1067	* 2.2342	* 4.4618	*
	* 2.1041	* 2.2896	* 2.4396	* 2.3623	* 2.1347	* 2.2395	* 4.0472	*
14	* 2.2262	* 1.8123	* 1.8161	* 1.8280	* 3.0449	* 4.0111	*	*
	* 2.2305	* 1.8215	* 1.8272	* 1.8825	* 3.0735	* 4.0027	*	*
	* 2.4556	* 2.0226	* 1.9935	* 2.1560	* 3.4458	* 4.3537	*	*
	* 2.5959	* 2.1470	* 2.1228	* 2.3068	* 3.5753	* 4.4624	*	*
	* 2.5199	* 2.1292	* 2.1333	* 2.2642	* 3.3378	* 4.0427	*	*
15	* 3.7922	* 3.1805	* 3.7065	* 4.1072	* 4 EFPD 118 % POWER			
	* 3.8425	* 3.2026	* 3.6777	* 4.0882	* 50 EFPD 118 % POWER			
	* 4.1881	* 3.4943	* 3.9419	* 4.4067	* 200 EFPD 118 % POWER			
	* 4.2654	* 3.5807	* 4.0051	* 4.4774	* 300 EFPD 118 % POWER			
	* 3.8425	* 3.2976	* 3.6237	* 4.0055	* 470 EFPD 118 % POWER			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 242 of 268

TABLE 6 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 2.4964	* 1.8994	* 1.9552	* 2.0035	* 2.0232	* 1.9316	* 2.1556	* 3.6534
	* 2.8090	* 2.0479	* 2.0224	* 1.8940	* 1.9413	* 1.8522	* 2.1542	* 3.6954
	* 3.4150	* 2.3934	* 2.0994	* 1.8317	* 1.9947	* 1.8814	* 2.3918	* 4.0618
	* 3.6201	* 2.5702	* 2.2152	* 1.9210	* 2.1268	* 1.9776	* 2.5377	* 4.1545
	* 3.4585	* 2.5824	* 2.2498	* 2.0335	* 2.1686	* 2.0505	* 2.4488	* 3.7270
9	* 1.8994	* 1.9004	* 1.9166	* 2.0387	* 1.8732	* 1.8946	* 1.7584	* 3.0743
	* 2.0479	* 2.0544	* 1.9478	* 1.9590	* 1.8608	* 1.9239	* 1.7578	* 3.0875
	* 2.3934	* 2.2085	* 1.8917	* 1.9906	* 1.8581	* 2.0909	* 1.9677	* 3.3976
	* 2.5702	* 2.3353	* 1.9772	* 2.1105	* 1.9494	* 2.2379	* 2.0980	* 3.5006
	* 2.5824	* 2.3624	* 2.0691	* 2.1568	* 2.0447	* 2.2318	* 2.0685	* 3.2073
10	* 1.9552	* 1.9180	* 2.0447	* 2.0189	* 1.8863	* 1.8404	* 1.7634	* 3.5754
	* 2.0224	* 1.9442	* 1.9887	* 1.9217	* 1.9146	* 1.9083	* 1.7681	* 3.5278
	* 2.0994	* 1.8896	* 2.0129	* 1.8570	* 2.0693	* 2.2389	* 1.9461	* 3.8285
	* 2.2152	* 1.9749	* 2.1314	* 1.9450	* 2.1977	* 2.4103	* 2.0790	* 3.9099
	* 2.2498	* 2.0666	* 2.1774	* 2.0574	* 2.2237	* 2.3772	* 2.0739	* 3.5206
11	* 2.0035	* 2.0363	* 2.0177	* 2.0496	* 1.8453	* 1.8427	* 1.7889	* 3.9772
	* 1.8940	* 1.9567	* 1.9205	* 1.9764	* 1.8491	* 1.8835	* 1.8329	* 3.9305
	* 1.8317	* 1.9883	* 1.8549	* 2.0465	* 1.9238	* 2.1683	* 2.1158	* 4.2968
	* 1.9210	* 2.1093	* 1.9439	* 2.1548	* 2.0182	* 2.3303	* 2.2626	* 4.3865
	* 2.0335	* 2.1555	* 2.0562	* 2.1866	* 2.0961	* 2.3047	* 2.2004	* 3.8934
12	* 2.0232	* 1.8743	* 1.8874	* 1.8453	* 1.8888	* 1.7445	* 2.9739	*
	* 1.9413	* 1.8619	* 1.9166	* 1.8491	* 1.8551	* 1.7426	* 2.9810	*
	* 1.9947	* 1.8571	* 2.0703	* 1.9238	* 2.0464	* 1.9413	* 3.3881	*
	* 2.1268	* 1.9482	* 2.1985	* 2.0182	* 2.1954	* 2.0663	* 3.5087	*
	* 2.1686	* 2.0435	* 2.2244	* 2.0961	* 2.2082	* 2.0807	* 3.2484	*
13	* 1.9316	* 1.8967	* 1.8394	* 1.8417	* 1.7445	* 1.8370	* 3.8887	*
	* 1.8522	* 1.9251	* 1.9073	* 1.8835	* 1.7426	* 1.8260	* 3.8612	*
	* 1.8814	* 2.0921	* 2.2390	* 2.1684	* 1.9413	* 2.0645	* 4.2766	*
	* 1.9776	* 2.2388	* 2.4106	* 2.3288	* 2.0650	* 2.1913	* 4.3775	*
	* 2.0505	* 2.2327	* 2.3776	* 2.3033	* 2.0807	* 2.1784	* 3.9378	*
14	* 2.1556	* 1.7584	* 1.7634	* 1.7889	* 2.9739	* 3.8918	*	*
	* 2.1542	* 1.7568	* 1.7681	* 1.8318	* 2.9830	* 3.8570	*	*
	* 2.3918	* 1.9677	* 1.9449	* 2.1158	* 3.3879	* 4.2772	*	*
	* 2.5377	* 2.0981	* 2.0791	* 2.2626	* 3.5085	* 4.3724	*	*
	* 2.4488	* 2.0686	* 2.0740	* 2.2005	* 3.2482	* 3.9336	*	*
15	* 3.6534	* 3.0659	* 3.5752	* 3.9726	* 4 EFPD 118 % POWER			
	* 3.6954	* 3.0787	* 3.5304	* 3.9227	* 50 EFPD 118 % POWER			
	* 4.0618	* 3.3912	* 3.8278	* 4.2915	* 200 EFPD 118 % POWER			
	* 4.1545	* 3.4937	* 3.9092	* 4.3810	* 300 EFPD 118 % POWER			
	* 3.7270	* 3.2046	* 3.5200	* 3.8936	* 470 EFPD 118 % POWER			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 243 of 268

TABLE 6 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 2.3775	* 1.7825	* 1.8335	* 1.8740	* 1.8993	* 1.8095	* 2.0231	* 3.4325
	* 2.6456	* 1.9285	* 1.8999	* 1.7718	* 1.8217	* 1.7320	* 2.0191	* 3.4647
	* 3.2161	* 2.2564	* 1.9755	* 1.7198	* 1.8794	* 1.7658	* 2.2484	* 3.8108
	* 3.4229	* 2.4395	* 2.1016	* 1.8234	* 2.0213	* 1.8772	* 2.4097	* 3.9259
	* 3.3532	* 2.5085	* 2.1957	* 1.9857	* 2.1201	* 2.0019	* 2.3882	* 3.6221
9	* 1.7825	* 1.7849	* 1.7905	* 1.9138	* 1.7509	* 1.7802	* 1.6432	* 2.8888
	* 1.9285	* 1.9330	* 1.8214	* 1.8387	* 1.7367	* 1.8052	* 1.6395	* 2.8903
	* 2.2564	* 2.0802	* 1.7739	* 1.8738	* 1.7433	* 1.9692	* 1.8428	* 3.1796
	* 2.4395	* 2.2187	* 1.8720	* 2.0052	* 1.8493	* 2.1257	* 1.9846	* 3.3075
	* 2.5085	* 2.2973	* 2.0169	* 2.1066	* 1.9964	* 2.1810	* 2.0114	* 3.1194
10	* 1.8335	* 1.7931	* 1.9162	* 1.8759	* 1.7626	* 1.7210	* 1.6456	* 3.3441
	* 1.8999	* 1.8172	* 1.8640	* 1.7889	* 1.7840	* 1.7747	* 1.6457	* 3.2977
	* 1.9755	* 1.7710	* 1.8908	* 1.7373	* 1.9426	* 2.0996	* 1.8164	* 3.5694
	* 2.1016	* 1.8699	* 2.0211	* 1.8426	* 2.0838	* 2.2829	* 1.9654	* 3.6822
	* 2.1957	* 2.0158	* 2.1267	* 2.0097	* 2.1748	* 2.3187	* 2.0203	* 3.4121
11	* 1.8740	* 1.9102	* 1.8787	* 1.9117	* 1.7167	* 1.7203	* 1.6596	* 3.7131
	* 1.7718	* 1.8367	* 1.7914	* 1.8431	* 1.7186	* 1.7515	* 1.6967	* 3.6694
	* 1.7198	* 1.8726	* 1.7354	* 1.9154	* 1.7956	* 2.0258	* 1.9685	* 3.9945
	* 1.8234	* 2.0037	* 1.8416	* 2.0442	* 1.9225	* 2.2218	* 2.1365	* 4.1208
	* 1.9857	* 2.1067	* 2.0086	* 2.1417	* 2.0594	* 2.2627	* 2.1451	* 3.7739
12	* 1.8993	* 1.7519	* 1.7645	* 1.7167	* 1.7700	* 1.6244	* 2.7677	*
	* 1.8217	* 1.7383	* 1.7857	* 1.7179	* 1.7344	* 1.6156	* 2.7770	*
	* 1.8794	* 1.7424	* 1.9436	* 1.7956	* 1.9208	* 1.8091	* 3.1449	*
	* 2.0213	* 1.8486	* 2.0844	* 1.9225	* 2.1056	* 1.9727	* 3.3207	*
	* 2.1201	* 1.9964	* 2.1754	* 2.0594	* 2.1746	* 2.0445	* 3.1763	*
13	* 1.8095	* 1.7818	* 1.7199	* 1.7194	* 1.6233	* 1.7035	* 3.6373	*
	* 1.7320	* 1.8062	* 1.7755	* 1.7506	* 1.6163	* 1.6918	* 3.6051	*
	* 1.7658	* 1.9702	* 2.0997	* 2.0244	* 1.8091	* 1.9171	* 3.9604	*
	* 1.8772	* 2.1264	* 2.2832	* 2.2209	* 1.9727	* 2.0885	* 4.1335	*
	* 2.0019	* 2.1803	* 2.3191	* 2.2613	* 2.0445	* 2.1350	* 3.8473	*
14	* 2.0231	* 1.6432	* 1.6456	* 1.6600	* 2.7683	* 3.6333	*	*
	* 2.0191	* 1.6387	* 1.6462	* 1.6958	* 2.7770	* 3.5984	*	*
	* 2.2484	* 1.8418	* 1.8162	* 1.9685	* 3.1447	* 3.9553	*	*
	* 2.4097	* 1.9847	* 1.9654	* 2.1361	* 3.3182	* 4.1293	*	*
	* 2.3882	* 2.0114	* 2.0203	* 2.1451	* 3.1761	* 3.8479	*	*
15	* 3.4325	* 2.8814	* 3.3439	* 3.7080	* 4 EFPD	118 % POWER		
	* 3.4647	* 2.8832	* 3.2996	* 3.6657	* 50 EFPD	118 % POWER		
	* 3.8108	* 3.1740	* 3.5680	* 3.9948	* 200 EFPD	118 % POWER		
	* 3.9259	* 3.3014	* 3.6815	* 4.1211	* 300 EFPD	118 % POWER		
	* 3.6221	* 3.1168	* 3.4115	* 3.7742	* 470 EFPD	118 % POWER		

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 244 of 268

TABLE 6 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 2.2432	* 1.6802	* 1.7313	* 1.7676	* 1.7940	* 1.7070	* 1.9127	* 3.2570
	* 2.5092	* 1.8234	* 1.8004	* 1.6770	* 1.7258	* 1.6380	* 1.9137	* 3.2915
	* 3.0343	* 2.1205	* 1.8566	* 1.6113	* 1.7618	* 1.6545	* 2.1119	* 3.5937
	* 3.2125	* 2.2823	* 1.9636	* 1.6960	* 1.8849	* 1.7478	* 2.2515	* 3.6821
	* 3.1757	* 2.3751	* 2.0803	* 1.8802	* 2.0104	* 1.8954	* 2.2601	* 3.4178
9	* 1.6802	* 1.6827	* 1.6877	* 1.8100	* 1.6489	* 1.6779	* 1.5451	* 2.7390
	* 1.8234	* 1.8285	* 1.7256	* 1.7414	* 1.6393	* 1.7048	* 1.5456	* 2.7418
	* 2.1205	* 1.9541	* 1.6634	* 1.7585	* 1.6327	* 1.8473	* 1.7244	* 2.9928
	* 2.2823	* 2.0748	* 1.7424	* 1.8716	* 1.7208	* 1.9845	* 1.8479	* 3.0942
	* 2.3751	* 2.1761	* 1.9079	* 1.9975	* 1.8897	* 2.0663	* 1.8988	* 2.9426
10	* 1.7313	* 1.6885	* 1.8109	* 1.7663	* 1.6579	* 1.6162	* 1.5483	* 3.1665
	* 1.8004	* 1.7203	* 1.7651	* 1.6893	* 1.6834	* 1.6726	* 1.5493	* 3.1272
	* 1.8566	* 1.6609	* 1.7736	* 1.6258	* 1.8215	* 1.9694	* 1.6969	* 3.3557
	* 1.9636	* 1.7406	* 1.8855	* 1.7129	* 1.9440	* 2.1333	* 1.8272	* 3.4422
	* 2.0803	* 1.9060	* 2.0147	* 1.9008	* 2.0595	* 2.1912	* 1.9056	* 3.2147
11	* 1.7676	* 1.8062	* 1.7674	* 1.7983	* 1.6117	* 1.6123	* 1.5556	* 3.5156
	* 1.6770	* 1.7402	* 1.6908	* 1.7397	* 1.6172	* 1.6453	* 1.5959	* 3.4733
	* 1.6113	* 1.7567	* 1.6240	* 1.7938	* 1.6745	* 1.8899	* 1.8382	* 3.7540
	* 1.6960	* 1.8700	* 1.7115	* 1.9042	* 1.7822	* 2.0626	* 1.9858	* 3.8503
	* 1.8802	* 1.9974	* 1.8996	* 2.0264	* 1.9412	* 2.1297	* 2.0165	* 3.5519
12	* 1.7940	* 1.6498	* 1.6596	* 1.6117	* 1.6581	* 1.5188	* 2.6037	*
	* 1.7258	* 1.6401	* 1.6849	* 1.6171	* 1.6299	* 1.5172	* 2.6191	*
	* 1.7618	* 1.6318	* 1.8223	* 1.6746	* 1.7908	* 1.6845	* 2.9423	*
	* 1.8849	* 1.7199	* 1.9445	* 1.7825	* 1.9542	* 1.8258	* 3.0884	*
	* 2.0104	* 1.8896	* 2.0588	* 1.9412	* 2.0503	* 1.9217	* 2.9844	*
13	* 1.7070	* 1.6805	* 1.6154	* 1.6115	* 1.5179	* 1.5915	* 3.4207	*
	* 1.6380	* 1.7065	* 1.6719	* 1.6445	* 1.5165	* 1.5847	* 3.4005	*
	* 1.6545	* 1.8481	* 1.9695	* 1.8887	* 1.6847	* 1.7826	* 3.7091	*
	* 1.7478	* 1.9851	* 2.1332	* 2.0618	* 1.8258	* 1.9338	* 3.8449	*
	* 1.8954	* 2.0657	* 2.1903	* 2.1299	* 1.9217	* 2.0048	* 3.6010	*
14	* 1.9127	* 1.5452	* 1.5480	* 1.5549	* 2.6011	* 3.4174	*	*
	* 1.9137	* 1.5456	* 1.5485	* 1.5950	* 2.6192	* 3.3946	*	*
	* 2.1119	* 1.7235	* 1.6960	* 1.8371	* 2.9421	* 3.7047	*	*
	* 2.2515	* 1.8476	* 1.8272	* 1.9858	* 3.0882	* 3.8424	*	*
	* 2.2601	* 1.8987	* 1.9056	* 2.0165	* 2.9842	* 3.6015	*	*
15	* 3.2570	* 2.7325	* 3.1666	* 3.5120	* 4 EFPD 118	* POWER		
	* 3.2915	* 2.7391	* 3.1289	* 3.4736	* 50 EFPD 118	* POWER		
	* 3.5937	* 2.9857	* 3.3518	* 3.7534	* 200 EFPD 118	* POWER		
	* 3.6821	* 3.0888	* 3.4416	* 3.8506	* 300 EFPD 118	* POWER		
	* 3.4178	* 2.9381	* 3.2141	* 3.5522	* 470 EFPD 118	* POWER		

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 245 of 268

TABLE 6 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 2.1347	* 1.6042	* 1.6553	* 1.6945	* 1.7185	* 1.6356	* 1.8311	* 3.1423
	* 2.4129	* 1.7493	* 1.7324	* 1.6211	* 1.6593	* 1.5796	* 1.8392	* 3.1864
	* 2.9033	* 2.0168	* 1.7653	* 1.5360	* 1.6730	* 1.5760	* 2.0069	* 3.4364
	* 3.0465	* 2.1548	* 1.8532	* 1.5962	* 1.7764	* 1.6456	* 2.1185	* 3.4848
	* 3.0369	* 2.2620	* 1.9804	* 1.7872	* 1.9150	* 1.7987	* 2.1468	* 3.2541
9	* 1.6042	* 1.6057	* 1.6132	* 1.7333	* 1.5752	* 1.6016	* 1.4757	* 2.6342
	* 1.7493	* 1.7568	* 1.6635	* 1.6760	* 1.5768	* 1.6343	* 1.4885	* 2.6474
	* 2.0168	* 1.8556	* 1.5856	* 1.6712	* 1.5548	* 1.7544	* 1.6395	* 2.8510
	* 2.1548	* 1.9540	* 1.6416	* 1.7635	* 1.6201	* 1.8708	* 1.7392	* 2.9183
	* 2.2620	* 2.0707	* 1.8130	* 1.9042	* 1.7957	* 1.9646	* 1.7982	* 2.7867
10	* 1.6553	* 1.6151	* 1.7348	* 1.6895	* 1.5815	* 1.5392	* 1.4814	* 3.0437
	* 1.7324	* 1.6600	* 1.6985	* 1.6250	* 1.6115	* 1.5993	* 1.4868	* 3.0181
	* 1.7653	* 1.5831	* 1.6842	* 1.5479	* 1.7295	* 1.8685	* 1.6101	* 3.2010
	* 1.8532	* 1.6392	* 1.7770	* 1.6110	* 1.8311	* 2.0103	* 1.7182	* 3.2531
	* 1.9804	* 1.8121	* 1.9186	* 1.8047	* 1.9612	* 2.0824	* 1.8024	* 3.0512
11	* 1.6945	* 1.7306	* 1.6906	* 1.7170	* 1.5398	* 1.5345	* 1.4834	* 3.3763
	* 1.6211	* 1.6748	* 1.6267	* 1.6643	* 1.5442	* 1.5672	* 1.5277	* 3.3551
	* 1.5360	* 1.6695	* 1.5462	* 1.7028	* 1.5853	* 1.7825	* 1.7431	* 3.5825
	* 1.5962	* 1.7627	* 1.6097	* 1.7929	* 1.6714	* 1.9309	* 1.8665	* 3.6393
	* 1.7872	* 1.9040	* 1.8038	* 1.9286	* 1.8350	* 2.0149	* 1.9067	* 3.3712
12	* 1.7185	* 1.5761	* 1.5832	* 1.5398	* 1.5766	* 1.4463	* 2.4872	*
	* 1.6593	* 1.5776	* 1.6128	* 1.5442	* 1.5528	* 1.4475	* 2.5037	*
	* 1.6730	* 1.5541	* 1.7302	* 1.5855	* 1.6871	* 1.5912	* 2.7925	*
	* 1.7764	* 1.6193	* 1.8315	* 1.6720	* 1.8284	* 1.7093	* 2.9056	*
	* 1.9150	* 1.7947	* 1.9617	* 1.8350	* 1.9400	* 1.8112	* 2.8213	*
13	* 1.6356	* 1.6040	* 1.5385	* 1.5338	* 1.4463	* 1.5133	* 3.2728	*
	* 1.5796	* 1.6372	* 1.5986	* 1.5665	* 1.4475	* 1.5109	* 3.2566	*
	* 1.5760	* 1.7551	* 1.8685	* 1.7816	* 1.5903	* 1.6800	* 3.5212	*
	* 1.6456	* 1.8713	* 2.0106	* 1.9309	* 1.7093	* 1.8089	* 3.6162	*
	* 1.7987	* 1.9652	* 2.0827	* 2.0140	* 1.8112	* 1.8867	* 3.4047	*
14	* 1.8311	* 1.4758	* 1.4815	* 1.4827	* 2.4853	* 3.2739	*	*
	* 1.8392	* 1.4874	* 1.4861	* 1.5269	* 2.5049	* 3.2567	*	*
	* 2.0069	* 1.6387	* 1.6095	* 1.7430	* 2.7913	* 3.5203	*	*
	* 2.1185	* 1.7390	* 1.7176	* 1.8665	* 2.9054	* 3.6168	*	*
	* 2.1468	* 1.7982	* 1.8025	* 1.9068	* 2.8233	* 3.4052	*	*
15	* 3.1423	* 2.6280	* 3.0408	* 3.3764	* 4 EFPD 118 % POWER			
	* 3.1864	* 2.6412	* 3.0153	* 3.3498	* 50 EFPD 118 % POWER			
	* 3.4364	* 2.8441	* 3.2005	* 3.5796	* 200 EFPD 118 % POWER			
	* 3.4848	* 2.9136	* 3.2526	* 3.6368	* 300 EFPD 118 % POWER			
	* 3.2541	* 2.7824	* 3.0506	* 3.3714	* 470 EFPD 118 % POWER			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 246 of 268

TABLE 6 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 2.0188	* 1.5239	* 1.5750	* 1.6063	* 1.6376	* 1.5518	* 1.7496	* 3.0104
	* 2.3032	* 1.6714	* 1.6591	* 1.5493	* 1.5945	* 1.5098	* 1.7684	* 3.0741
	* 2.7433	* 1.9071	* 1.6650	* 1.4433	* 1.5788	* 1.4791	* 1.8961	* 3.2542
	* 2.8419	* 2.0051	* 1.7192	* 1.4749	* 1.6481	* 1.5205	* 1.9733	* 3.2496
	* 2.8446	* 2.1194	* 1.8492	* 1.6661	* 1.7877	* 1.6773	* 2.0045	* 3.0358
9	* 1.5239	* 1.5245	* 1.5248	* 1.6499	* 1.4913	* 1.5242	* 1.3961	* 2.5248
	* 1.6714	* 1.6800	* 1.5875	* 1.6103	* 1.5056	* 1.5666	* 1.4178	* 2.5520
	* 1.9071	* 1.7508	* 1.4877	* 1.5785	* 1.4603	* 1.6549	* 1.5358	* 2.6999
	* 2.0051	* 1.8137	* 1.5177	* 1.6380	* 1.4969	* 1.7371	* 1.6063	* 2.7220
	* 2.1194	* 1.9355	* 1.6879	* 1.7767	* 1.6741	* 1.8365	* 1.6691	* 2.6051
10	* 1.5750	* 1.5266	* 1.6485	* 1.5993	* 1.5014	* 1.4588	* 1.3997	* 2.9117
	* 1.6591	* 1.5843	* 1.6272	* 1.5502	* 1.5390	* 1.5246	* 1.4125	* 2.9032
	* 1.6650	* 1.4859	* 1.5885	* 1.4520	* 1.6309	* 1.7585	* 1.5050	* 3.0182
	* 1.7192	* 1.5155	* 1.6477	* 1.4841	* 1.6982	* 1.8678	* 1.5844	* 3.0207
	* 1.8492	* 1.6866	* 1.7890	* 1.6813	* 1.8284	* 1.9409	* 1.6738	* 2.8367
11	* 1.6063	* 1.6472	* 1.6011	* 1.6318	* 1.4544	* 1.4509	* 1.3972	* 3.2265
	* 1.5493	* 1.6088	* 1.5522	* 1.5886	* 1.4606	* 1.4867	* 1.4491	* 3.2206
	* 1.4433	* 1.5771	* 1.4507	* 1.6029	* 1.4765	* 1.6638	* 1.6279	* 3.3788
	* 1.4749	* 1.6365	* 1.4835	* 1.6573	* 1.5266	* 1.7736	* 1.7201	* 3.3834
	* 1.6661	* 1.7757	* 1.6797	* 1.7964	* 1.7019	* 1.8699	* 1.7662	* 3.1365
12	* 1.6376	* 1.4920	* 1.5027	* 1.4544	* 1.4846	* 1.3616	* 2.3610	*
	* 1.5945	* 1.5063	* 1.5398	* 1.4595	* 1.4700	* 1.3669	* 2.3887	*
	* 1.5788	* 1.4597	* 1.6316	* 1.4764	* 1.5708	* 1.4769	* 2.6160	*
	* 1.6481	* 1.4960	* 1.6985	* 1.5266	* 1.6707	* 1.5549	* 2.6761	*
	* 1.7877	* 1.6735	* 1.8288	* 1.7019	* 1.7952	* 1.6742	* 2.6204	*
13	* 1.5518	* 1.5264	* 1.4582	* 1.4502	* 1.3612	* 1.4213	* 3.1108	*
	* 1.5098	* 1.5688	* 1.5240	* 1.4861	* 1.3659	* 1.4247	* 3.1045	*
	* 1.4791	* 1.6555	* 1.7589	* 1.6630	* 1.4772	* 1.5571	* 3.2979	*
	* 1.5205	* 1.7375	* 1.8681	* 1.7727	* 1.5549	* 1.6433	* 3.3263	*
	* 1.6773	* 1.8367	* 1.9401	* 1.8692	* 1.6742	* 1.7395	* 3.1546	*
14	* 1.7496	* 1.3962	* 1.3991	* 1.3967	* 2.3593	* 3.1081	*	*
	* 1.7684	* 1.4179	* 1.4130	* 1.4484	* 2.3886	* 3.1066	*	*
	* 1.8961	* 1.5357	* 1.5046	* 1.6267	* 2.6137	* 3.2998	*	*
	* 1.9733	* 1.6064	* 1.5844	* 1.7191	* 2.6760	* 3.3234	*	*
	* 2.0045	* 1.6692	* 1.6739	* 1.7654	* 2.6205	* 3.1524	*	*
15	* 3.0104	* 2.5191	* 2.9091	* 3.2268	* 4 EFPD 118 % POWER			
	* 3.0741	* 2.5466	* 2.9005	* 3.2157	* 50 EFPD 118 % POWER			
	* 3.2542	* 2.6937	* 3.0171	* 3.3790	* 200 EFPD 118 % POWER			
	* 3.2496	* 2.7179	* 3.0183	* 3.3825	* 300 EFPD 118 % POWER			
	* 3.0358	* 2.6017	* 2.8362	* 3.1368	* 470 EFPD 118 % POWER			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 247 of 268

TABLE 6 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.9471	* 1.4701	* 1.5245	* 1.5603	* 1.5965	* 1.5123	* 1.7121	* 2.9558
	* 2.2526	* 1.6354	* 1.6299	* 1.5250	* 1.5686	* 1.4902	* 1.7445	* 3.0409
	* 2.6405	* 1.8299	* 1.5991	* 1.3872	* 1.5172	* 1.4284	* 1.8334	* 3.1510
	* 2.6700	* 1.8793	* 1.6083	* 1.3776	* 1.5439	* 1.4221	* 1.8556	* 3.0760
	* 2.6669	* 1.9856	* 1.7290	* 1.5500	* 1.6693	* 1.5624	* 1.8794	* 2.8631
9	* 1.4701	* 1.4713	* 1.4721	* 1.6033	* 1.4505	* 1.4858	* 1.3580	* 2.4825
	* 1.6354	* 1.6459	* 1.5627	* 1.5840	* 1.4820	* 1.5405	* 1.3964	* 2.5303
	* 1.8299	* 1.6825	* 1.4288	* 1.5151	* 1.4057	* 1.5940	* 1.4793	* 2.6201
	* 1.8793	* 1.6976	* 1.4150	* 1.5321	* 1.3977	* 1.6290	* 1.5023	* 2.5729
	* 1.9856	* 1.8094	* 1.5698	* 1.6583	* 1.5582	* 1.7169	* 1.5571	* 2.4506
10	* 1.5245	* 1.4726	* 1.6009	* 1.5527	* 1.4602	* 1.4182	* 1.3602	* 2.8609
	* 1.6299	* 1.5596	* 1.5988	* 1.5284	* 1.5108	* 1.4956	* 1.3899	* 2.8782
	* 1.5991	* 1.4272	* 1.5246	* 1.3962	* 1.5662	* 1.6901	* 1.4470	* 2.9244
	* 1.6083	* 1.4132	* 1.5397	* 1.3848	* 1.5894	* 1.7487	* 1.4786	* 2.8497
	* 1.7290	* 1.5689	* 1.6688	* 1.5625	* 1.7071	* 1.8161	* 1.5603	* 2.6670
11	* 1.5603	* 1.6014	* 1.5549	* 1.5887	* 1.4100	* 1.4083	* 1.3557	* 3.1739
	* 1.5250	* 1.5818	* 1.5299	* 1.5628	* 1.4297	* 1.4538	* 1.4221	* 3.1887
	* 1.3872	* 1.5129	* 1.3950	* 1.5398	* 1.4193	* 1.5945	* 1.5640	* 3.2731
	* 1.3776	* 1.5310	* 1.3842	* 1.5510	* 1.4212	* 1.6522	* 1.6051	* 3.1948
	* 1.5500	* 1.6579	* 1.5615	* 1.6737	* 1.5726	* 1.7361	* 1.6453	* 2.9520
12	* 1.5965	* 1.4512	* 1.4622	* 1.4106	* 1.4343	* 1.3203	* 2.3018	*
	* 1.5686	* 1.4827	* 1.5126	* 1.4286	* 1.4335	* 1.3356	* 2.3487	*
	* 1.5172	* 1.4051	* 1.5668	* 1.4202	* 1.5007	* 1.4139	* 2.5220	*
	* 1.5439	* 1.3971	* 1.5904	* 1.4212	* 1.5502	* 1.4457	* 2.5075	*
	* 1.6693	* 1.5576	* 1.7074	* 1.5726	* 1.6580	* 1.5472	* 2.4444	*
13	* 1.5123	* 1.4878	* 1.4175	* 1.4077	* 1.3197	* 1.3752	* 3.0392	*
	* 1.4902	* 1.5427	* 1.4954	* 1.4532	* 1.3350	* 1.3940	* 3.0609	*
	* 1.4284	* 1.5943	* 1.6890	* 1.5938	* 1.4141	* 1.4895	* 3.1830	*
	* 1.4221	* 1.6293	* 1.7480	* 1.6514	* 1.4457	* 1.5272	* 3.1178	*
	* 1.5624	* 1.7173	* 1.8164	* 1.7363	* 1.5472	* 1.6103	* 2.9464	*
14	* 1.7121	* 1.3582	* 1.3603	* 1.3551	* 2.3019	* 3.0364	*	*
	* 1.7445	* 1.3965	* 1.3893	* 1.4214	* 2.3498	* 3.0564	*	*
	* 1.8334	* 1.4793	* 1.4467	* 1.5633	* 2.5192	* 3.1846	*	*
	* 1.8556	* 1.5023	* 1.4779	* 1.6044	* 2.5073	* 3.1182	*	*
	* 1.8794	* 1.5571	* 1.5603	* 1.6454	* 2.4446	* 2.9449	*	*
15	* 2.9558	* 2.4751	* 2.8583	* 3.1711	* 4 EFPD 118 % POWER			
	* 3.0409	* 2.5218	* 2.8740	* 3.1910	* 50 EFPD 118 % POWER			
	* 3.1510	* 2.6143	* 2.9248	* 3.2745	* 200 EFPD 118 % POWER			
	* 3.0760	* 2.5673	* 2.8492	* 3.1919	* 300 EFPD 118 % POWER			
	* 2.8631	* 2.4459	* 2.6665	* 2.9496	* 470 EFPD 118 % POWER			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 248 of 268

TABLE 6 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.9354	* 1.4593	* 1.5190	* 1.5630	* 1.5990	* 1.5199	* 1.7302	* 3.0002 *
	* 2.2752	* 1.6505	* 1.6498	* 1.5599	* 1.5927	* 1.5256	* 1.7826	* 3.1207 *
	* 2.6242	* 1.8117	* 1.5888	* 1.3874	* 1.5055	* 1.4290	* 1.8204	* 3.1605 *
	* 2.5874	* 1.8140	* 1.5536	* 1.3294	* 1.4883	* 1.3744	* 1.7889	* 2.9890 *
	* 2.5479	* 1.8836	* 1.6416	* 1.4580	* 1.5797	* 1.4706	* 1.7784	* 2.7222 *
9	* 1.4593	* 1.4617	* 1.4676	* 1.6054	* 1.4583	* 1.4938	* 1.3695	* 2.5159 *
	* 1.6505	* 1.6637	* 1.5977	* 1.6079	* 1.5172	* 1.5655	* 1.4346	* 2.5949 *
	* 1.8117	* 1.6706	* 1.4305	* 1.5049	* 1.4085	* 1.5801	* 1.4738	* 2.6163 *
	* 1.8140	* 1.6401	* 1.3678	* 1.4785	* 1.3508	* 1.5729	* 1.4520	* 2.4952 *
	* 1.8836	* 1.7174	* 1.4797	* 1.5730	* 1.4653	* 1.6241	* 1.4684	* 2.3157 *
10	* 1.5190	* 1.4696	* 1.6018	* 1.5563	* 1.4661	* 1.4231	* 1.3719	* 2.9027 *
	* 1.6498	* 1.5945	* 1.6231	* 1.5625	* 1.5358	* 1.5184	* 1.4276	* 2.9545 *
	* 1.5888	* 1.4280	* 1.5151	* 1.4006	* 1.5535	* 1.6690	* 1.4500	* 2.9290 *
	* 1.5536	* 1.3658	* 1.4865	* 1.3371	* 1.5331	* 1.6857	* 1.4273	* 2.7787 *
	* 1.6416	* 1.4785	* 1.5832	* 1.4698	* 1.6165	* 1.7210	* 1.4670	* 2.5335 *
11	* 1.5630	* 1.6031	* 1.5567	* 1.5917	* 1.4154	* 1.4138	* 1.3669	* 3.2244 *
	* 1.5599	* 1.6063	* 1.5640	* 1.5931	* 1.4615	* 1.4778	* 1.4588	* 3.2901 *
	* 1.3874	* 1.5038	* 1.3994	* 1.5291	* 1.4205	* 1.5834	* 1.5628	* 3.2876 *
	* 1.3294	* 1.4772	* 1.3361	* 1.4964	* 1.3724	* 1.5867	* 1.5511	* 3.1132 *
	* 1.4580	* 1.5726	* 1.4686	* 1.5849	* 1.4745	* 1.6359	* 1.5512	* 2.8047 *
12	* 1.5990	* 1.4590	* 1.4674	* 1.4153	* 1.4401	* 1.3239	* 2.3267 *	
	* 1.5927	* 1.5180	* 1.5378	* 1.4615	* 1.4562	* 1.3644	* 2.4007 *	
	* 1.5055	* 1.4079	* 1.5541	* 1.4211	* 1.4887	* 1.4110	* 2.5138 *	
	* 1.4883	* 1.3503	* 1.5333	* 1.3724	* 1.4873	* 1.3936	* 2.4309 *	
	* 1.5797	* 1.4651	* 1.6173	* 1.4745	* 1.5608	* 1.4488	* 2.3110 *	
13	* 1.5199	* 1.4966	* 1.4224	* 1.4138	* 1.3240	* 1.3856	* 3.0821 *	
	* 1.5256	* 1.5677	* 1.5178	* 1.4771	* 1.3638	* 1.4293	* 3.1357 *	
	* 1.4290	* 1.5806	* 1.6683	* 1.5833	* 1.4102	* 1.4861	* 3.1875 *	
	* 1.3744	* 1.5732	* 1.6860	* 1.5860	* 1.3930	* 1.4721	* 3.0307 *	
	* 1.4706	* 1.6244	* 1.7211	* 1.6361	* 1.4489	* 1.5102	* 2.7891 *	
14	* 1.7302	* 1.3696	* 1.3713	* 1.3663	* 2.3268	* 3.0794 *		
	* 1.7826	* 1.4335	* 1.4265	* 1.4581	* 2.4007	* 3.1359 *		
	* 1.8204	* 1.4739	* 1.4493	* 1.5620	* 2.5137	* 3.1880 *		
	* 1.7889	* 1.4514	* 1.4273	* 1.5504	* 2.4307	* 3.0312 *		
	* 1.7784	* 1.4683	* 1.4670	* 1.5512	* 2.3109	* 2.7877 *		
15	* 3.0002	* 2.5096	* 2.9009	* 3.2213	* 4 EFPD	118 % POWER		
	* 3.1207	* 2.5888	* 2.9540	* 3.2870	* 50 EFPD	118 % POWER		
	* 3.1605	* 2.6106	* 2.9263	* 3.2890	* 200 EFPD	118 % POWER		
	* 2.9890	* 2.4907	* 2.7776	* 3.1134	* 300 EFPD	118 % POWER		
	* 2.7222	* 2.3128	* 2.5331	* 2.8048	* 470 EFPD	118 % POWER		

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 249 of 268

TABLE 6 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.9417	* 1.4613	* 1.5244	* 1.5707	* 1.6049	* 1.5295	* 1.7559	* 3.0592
	* 2.3094	* 1.6757	* 1.6790	* 1.6003	* 1.6238	* 1.5665	* 1.8315	* 3.2218
	* 2.6204	* 1.8071	* 1.5954	* 1.3975	* 1.5074	* 1.4396	* 1.8278	* 3.1910
	* 2.5149	* 1.7613	* 1.5108	* 1.2907	* 1.4400	* 1.3331	* 1.7349	* 2.9261
	* 2.4148	* 1.7779	* 1.5492	* 1.3642	* 1.4844	* 1.3746	* 1.6732	* 2.5737
9	* 1.4613	* 1.4644	* 1.4714	* 1.6126	* 1.4679	* 1.5093	* 1.3920	* 2.5691
	* 1.6757	* 1.6909	* 1.6376	* 1.6409	* 1.5557	* 1.6003	* 1.4840	* 2.6880
	* 1.8071	* 1.6752	* 1.4440	* 1.5092	* 1.4185	* 1.5813	* 1.4801	* 2.6488
	* 1.7613	* 1.5957	* 1.3320	* 1.4356	* 1.3118	* 1.5209	* 1.4136	* 2.4430
	* 1.7779	* 1.6202	* 1.3880	* 1.4817	* 1.3707	* 1.5250	* 1.3751	* 2.1870
10	* 1.5244	* 1.4730	* 1.6085	* 1.5648	* 1.4787	* 1.4394	* 1.3938	* 2.9676
	* 1.6790	* 1.6358	* 1.6561	* 1.6045	* 1.5699	* 1.5560	* 1.4796	* 3.0644
	* 1.5954	* 1.4413	* 1.5207	* 1.4184	* 1.5579	* 1.6647	* 1.4621	* 2.9612
	* 1.5108	* 1.3299	* 1.4450	* 1.2993	* 1.4883	* 1.6335	* 1.3870	* 2.7198
	* 1.5492	* 1.3865	* 1.4904	* 1.3758	* 1.5223	* 1.6189	* 1.3701	* 2.3895
11	* 1.5707	* 1.6090	* 1.5657	* 1.6023	* 1.4296	* 1.4293	* 1.3884	* 3.3045
	* 1.6003	* 1.6386	* 1.6053	* 1.6287	* 1.5065	* 1.5144	* 1.5094	* 3.4169
	* 1.3975	* 1.5079	* 1.4159	* 1.5351	* 1.4299	* 1.5796	* 1.5701	* 3.3427
	* 1.2907	* 1.4344	* 1.2983	* 1.4542	* 1.3340	* 1.5338	* 1.5083	* 3.0560
	* 1.3642	* 1.4811	* 1.3753	* 1.4928	* 1.3755	* 1.5315	* 1.4533	* 2.6527
12	* 1.6049	* 1.4686	* 1.4811	* 1.4296	* 1.4519	* 1.3364	* 2.3651	*
	* 1.6238	* 1.5565	* 1.5720	* 1.5065	* 1.4899	* 1.4043	* 2.4729	*
	* 1.5074	* 1.4181	* 1.5584	* 1.4299	* 1.4854	* 1.4120	* 2.5212	*
	* 1.4400	* 1.3109	* 1.4885	* 1.3346	* 1.4372	* 1.3513	* 2.3711	*
	* 1.4844	* 1.3704	* 1.5225	* 1.3760	* 1.4606	* 1.3498	* 2.1731	*
13	* 1.5295	* 1.5125	* 1.4387	* 1.4287	* 1.3364	* 1.4075	* 3.1346	*
	* 1.5665	* 1.6026	* 1.5552	* 1.5137	* 1.4047	* 1.4797	* 3.2399	*
	* 1.4396	* 1.5819	* 1.6651	* 1.5789	* 1.4120	* 1.4963	* 3.2090	*
	* 1.3331	* 1.5219	* 1.6329	* 1.5338	* 1.3513	* 1.4296	* 2.9639	*
	* 1.3746	* 1.5253	* 1.6190	* 1.5317	* 1.3498	* 1.4090	* 2.6237	*
14	* 1.7559	* 1.3914	* 1.3932	* 1.3878	* 2.3651	* 3.1318	*	*
	* 1.8315	* 1.4840	* 1.4790	* 1.5082	* 2.4741	* 3.2400	*	*
	* 1.8278	* 1.4792	* 1.4614	* 1.5691	* 2.5186	* 3.2061	*	*
	* 1.7349	* 1.4130	* 1.3871	* 1.5084	* 2.3692	* 2.9617	*	*
	* 1.6732	* 1.3747	* 1.3701	* 1.4533	* 2.1729	* 2.6241	*	*
15	* 3.0592	* 2.5619	* 2.9675	* 3.3024	* 4 EFPD 118 % POWER			
	* 3.2218	* 2.6816	* 3.0618	* 3.4166	* 50 EFPD 118 % POWER			
	* 3.1910	* 2.6449	* 2.9610	* 3.3396	* 200 EFPD 118 % POWER			
	* 2.9261	* 2.4380	* 2.7186	* 3.0552	* 300 EFPD 118 % POWER			
	* 2.5737	* 2.1844	* 2.3890	* 2.6529	* 470 EFPD 118 % POWER			

CNEI-0400-24
Appendix A, Rev. 18
Page 250 of 268

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

	H	G	F	E	D	C	B	A

8	2.0782	1.5726	1.6328	1.6721	1.6948	1.6353	1.8852	3.3184
*	2.4928	1.8181	1.8201	1.7422	1.7446	1.7159	1.9961	3.5528
*	2.8032	1.9321	1.7117	1.5119	1.6061	1.5604	1.9599	3.4812
*	2.6262	1.8260	1.5763	1.3508	1.4851	1.3961	1.7978	3.0888
*	2.4416	1.7817	1.5526	1.3530	1.4795	1.3567	1.6682	2.5981

9	1.5726	1.5759	1.5861	1.7106	1.5824	1.6214	1.5216	2.8021
*	1.8181	1.8337	1.7894	1.7700	1.7104	1.7395	1.6493	2.9908
*	1.9321	1.7971	1.5658	1.6169	1.5342	1.6903	1.6074	2.8970
*	1.8260	1.6601	1.3982	1.4904	1.3732	1.5712	1.4827	2.5764
*	1.7817	1.6235	1.3801	1.4825	1.3585	1.5194	1.3714	2.1935

10	1.6328	1.5865	1.7097	1.6762	1.5883	1.5599	1.5327	3.2631
*	1.8201	1.7854	1.7876	1.7549	1.7060	1.7028	1.6641	3.4239
*	1.7117	1.5628	1.6304	1.5388	1.6697	1.7839	1.6176	3.2453
*	1.5763	1.3965	1.5002	1.3622	1.5487	1.6966	1.4684	2.8685
*	1.5526	1.3787	1.4930	1.3666	1.5220	1.6192	1.3605	2.4137

11	1.6721	1.7080	1.6771	1.7024	1.5358	1.5411	1.5387	3.6388
*	1.7422	1.7673	1.7559	1.7619	1.6617	1.6566	1.6974	3.8276
*	1.5119	1.6144	1.5356	1.6483	1.5461	1.6851	1.7180	3.6727
*	1.3508	1.4892	1.3610	1.5199	1.3963	1.5879	1.5926	3.2530
*	1.3530	1.4815	1.3658	1.4963	1.3614	1.5254	1.4530	2.6902

12	1.6948	1.5832	1.5898	1.5358	1.5458	1.4401	2.5598	
*	1.7446	1.7114	1.7078	1.6617	1.6173	1.5550	2.7173	
*	1.6061	1.5335	1.6704	1.5461	1.5825	1.5283	2.7112	
*	1.4851	1.3726	1.5492	1.3966	1.4851	1.4176	2.4739	
*	1.4795	1.3579	1.5223	1.3619	1.4541	1.3377	2.1764	

13	1.6353	1.6225	1.5592	1.5404	1.4395	1.5511	3.4033	
*	1.7159	1.7422	1.7027	1.6558	1.5548	1.6665	3.5761	
*	1.5604	1.6910	1.7827	1.6840	1.5283	1.6334	3.4744	
*	1.3961	1.5718	1.6958	1.5872	1.4170	1.5080	3.1074	
*	1.3567	1.5204	1.6189	1.5255	1.3378	1.4004	2.6398	

14	1.8852	1.5214	1.5319	1.5379	2.5591	3.4011		
*	1.9961	1.6492	1.6633	1.6964	2.7150	3.5725		
*	1.9599	1.6077	1.6165	1.7171	2.7112	3.4745		
*	1.7978	1.4825	1.4678	1.5918	2.4732	3.1075		
*	1.6682	1.3710	1.3605	1.4530	2.1763	2.6380		

15	3.3184	2.7951	3.2609	3.6376	4 EFPD	118 %	POWER	
*	3.5528	2.9831	3.4207	3.8234	50 EFPD	118 %	POWER	
*	3.4812	2.8920	3.2452	3.6728	200 EFPD	118 %	POWER	
*	3.0888	2.5721	2.8684	3.2499	300 EFPD	118 %	POWER	
*	2.5981	2.1900	2.4144	2.6904	470 EFPD	118 %	POWER	

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 251 of 268

TABLE 6 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 2.5058	* 2.0510	* 2.0925	* 1.9529	* 1.9888	* 1.9532	* 2.2880	* 4.0056
	* 3.0158	* 2.3757	* 2.3272	* 2.0851	* 2.0954	* 2.1056	* 2.4605	* 4.3651
	* 3.3405	* 2.4793	* 2.1757	* 1.7764	* 1.9304	* 1.8552	* 2.3737	* 4.2304
	* 3.0565	* 2.2511	* 1.9375	* 1.5439	* 1.7403	* 1.6155	* 2.1076	* 3.6523
	* 2.7273	* 2.0839	* 1.8225	* 1.4684	* 1.6526	* 1.4801	* 1.8439	* 2.9200
9	* 2.0510	* 2.0390	* 1.9237	* 2.1181	* 1.9192	* 2.0318	* 1.8759	* 3.4928
	* 2.3757	* 2.3447	* 2.1561	* 2.2348	* 2.0906	* 2.1873	* 2.0823	* 3.7888
	* 2.4793	* 2.2720	* 1.8387	* 2.0447	* 1.7918	* 2.0946	* 1.9984	* 3.6287
	* 2.2511	* 2.0284	* 1.5922	* 1.8275	* 1.5616	* 1.8874	* 1.7645	* 3.1248
	* 2.0839	* 1.8926	* 1.5025	* 1.7328	* 1.4733	* 1.7282	* 1.5103	* 2.5053
10	* 2.0925	* 1.9250	* 2.1102	* 1.9788	* 2.0380	* 2.0321	* 1.9208	* 4.0173
	* 2.3272	* 2.1517	* 2.2449	* 2.1257	* 2.2136	* 2.2384	* 2.1338	* 4.2994
	* 2.1757	* 1.8356	* 2.0507	* 1.8017	* 2.1221	* 2.2970	* 2.0703	* 4.0409
	* 1.9375	* 1.5894	* 1.8305	* 1.5669	* 1.9036	* 2.0969	* 1.8009	* 3.4486
	* 1.8225	* 1.5007	* 1.7382	* 1.4851	* 1.7816	* 1.9033	* 1.5250	* 2.7252
11	* 1.9529	* 2.1150	* 1.9788	* 2.1200	* 1.8616	* 1.8844	* 1.9148	* 4.4441
	* 2.0851	* 2.2318	* 2.1258	* 2.2360	* 2.0143	* 2.0441	* 2.1551	* 4.7752
	* 1.7764	* 2.0422	* 1.7987	* 2.0935	* 1.8114	* 2.0420	* 2.1326	* 4.5503
	* 1.5439	* 1.8256	* 1.5642	* 1.8705	* 1.5933	* 1.8581	* 1.8961	* 3.8817
	* 1.4684	* 1.7314	* 1.4845	* 1.7546	* 1.4754	* 1.6844	* 1.6099	* 3.0209
12	* 1.9888	* 1.9197	* 2.0405	* 1.8612	* 1.8388	* 1.7337	* 3.0627	*
	* 2.0954	* 2.0880	* 2.2164	* 2.0143	* 1.9619	* 1.9183	* 3.3163	*
	* 1.9304	* 1.7908	* 2.1219	* 1.8114	* 1.9126	* 1.8748	* 3.2788	*
	* 1.7403	* 1.5606	* 1.9045	* 1.5933	* 1.7400	* 1.6633	* 2.8926	*
	* 1.6526	* 1.4731	* 1.7821	* 1.4754	* 1.6139	* 1.4659	* 2.4089	*
13	* 1.9532	* 2.0346	* 2.0312	* 1.8834	* 1.7334	* 1.9221	* 4.1093	*
	* 2.1056	* 2.1888	* 2.2383	* 2.0429	* 1.9183	* 2.1163	* 4.4052	*
	* 1.8552	* 2.0960	* 2.2950	* 2.0425	* 1.8748	* 2.0488	* 4.2408	*
	* 1.6155	* 1.8879	* 2.0956	* 1.8578	* 1.6628	* 1.8258	* 3.6648	*
	* 1.4801	* 1.7290	* 1.9029	* 1.6844	* 1.4659	* 1.5766	* 2.9240	*
14	* 2.2880	* 1.8759	* 1.9204	* 1.9144	* 3.0627	* 4.1060	*	*
	* 2.4605	* 2.0821	* 2.1338	* 2.1536	* 3.3163	* 4.4047	*	*
	* 2.3737	* 1.9985	* 2.0708	* 2.1306	* 3.2799	* 4.2409	*	*
	* 2.1076	* 1.7635	* 1.7999	* 1.8946	* 2.8910	* 3.6649	*	*
	* 1.8439	* 1.5103	* 1.5250	* 1.6096	* 2.4089	* 2.9241	*	*
15	* 4.0056	* 3.4880	* 4.0174	* 4.4441	* 4 EFPD 118 % POWER			
	* 4.3651	* 3.7807	* 4.2947	* 4.7752	* 50 EFPD 118 % POWER			
	* 4.2304	* 3.6209	* 4.0408	* 4.5420	* 200 EFPD 118 % POWER			
	* 3.6523	* 3.1190	* 3.4450	* 3.8757	* 300 EFPD 118 % POWER			
	* 2.9200	* 2.5025	* 2.7251	* 3.0193	* 470 EFPD 118 % POWER			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 252 of 268

TABLE 6 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 3.6914	* 4.5435	* 4.3523	* 3.5873	* 4.1205	* 3.6505	* 4.6189	* 7.7948 *
	* 4.4591	* 5.2534	* 4.8264	* 4.0467	* 4.4954	* 4.1459	* 5.1227	* 8.7140 *
	* 4.8055	* 5.2575	* 4.5515	* 3.7136	* 4.1912	* 3.9043	* 4.9870	* 8.4562 *
	* 4.2374	* 4.5602	* 3.9457	* 3.2185	* 3.6379	* 3.3764	* 4.2790	* 6.9986 *
	* 3.5396	* 3.8206	* 3.3732	* 2.8310	* 3.1333	* 2.8593	* 3.4367	* 5.0947 *
9	* 4.5435	* 4.2786	* 3.6390	* 4.2410	* 3.5874	* 4.2181	* 4.1328	* 7.1797 *
	* 5.2534	* 4.8155	* 4.1632	* 4.6317	* 4.0514	* 4.6302	* 4.7563	* 7.9851 *
	* 5.2575	* 4.6326	* 3.8428	* 4.3496	* 3.7562	* 4.4430	* 4.5945	* 7.6709 *
	* 4.5602	* 4.0249	* 3.3180	* 3.7801	* 3.2560	* 3.8526	* 3.9079	* 6.3599 *
	* 3.8206	* 3.4331	* 2.9061	* 3.2476	* 2.8398	* 3.2463	* 3.0944	* 4.6457 *
10	* 4.3523	* 3.6347	* 4.2921	* 3.6450	* 4.3181	* 4.5069	* 4.2035	* 7.4018 *
	* 4.8264	* 4.1577	* 4.7063	* 4.1096	* 4.7263	* 5.0378	* 4.8485	* 8.2221 *
	* 4.5515	* 3.8382	* 4.3962	* 3.7725	* 4.4802	* 5.0217	* 4.7218	* 7.8797 *
	* 3.9457	* 3.3124	* 3.8167	* 3.2664	* 3.8964	* 4.3748	* 4.0142	* 6.5114 *
	* 3.3732	* 2.9019	* 3.2732	* 2.8645	* 3.3207	* 3.5885	* 3.1375	* 4.7176 *
11	* 3.5873	* 4.2351	* 3.6450	* 4.1805	* 3.5019	* 4.0343	* 4.4154	* 8.4672 *
	* 4.0467	* 4.6248	* 4.1096	* 4.5944	* 3.9759	* 4.4934	* 5.1082	* 9.4012 *
	* 3.7136	* 4.3416	* 3.7680	* 4.4578	* 3.8170	* 4.4764	* 5.0660	* 9.0458 *
	* 3.2185	* 3.7756	* 3.2598	* 3.8614	* 3.3317	* 3.8989	* 4.3028	* 7.4455 *
	* 2.8310	* 3.2464	* 2.8635	* 3.2775	* 2.8481	* 3.2144	* 3.3131	* 5.3154 *
12	* 4.1205	* 3.5874	* 4.3189	* 3.5019	* 3.9191	* 3.7800	* 5.7232	*
	* 4.4954	* 4.0514	* 4.7272	* 3.9759	* 4.3129	* 4.3433	* 6.3863	*
	* 4.1912	* 3.7501	* 4.4810	* 3.8170	* 4.1795	* 4.2737	* 6.3573	*
	* 3.6379	* 3.2527	* 3.8970	* 3.3317	* 3.6478	* 3.6893	* 5.4180	*
	* 3.1333	* 2.8398	* 3.3227	* 2.8497	* 3.1006	* 2.9972	* 4.1104	*
13	* 3.6505	* 4.2188	* 4.5065	* 4.0340	* 3.7800	* 4.3135	* 7.7463	*
	* 4.1459	* 4.6310	* 5.0305	* 4.4931	* 4.3433	* 4.9290	* 8.5765	*
	* 3.9043	* 4.4438	* 5.0241	* 4.4762	* 4.2658	* 4.8037	* 8.3026	*
	* 3.3764	* 3.8532	* 4.3744	* 3.8987	* 3.6893	* 4.0982	* 6.9190	*
	* 2.8593	* 3.2463	* 3.5885	* 3.2143	* 2.9972	* 3.2269	* 5.0404	*
14	* 4.6189	* 4.1309	* 4.2036	* 4.4089	* 5.7168	* 7.7457	*	*
	* 5.1227	* 4.7555	* 4.8485	* 5.1073	* 6.3851	* 8.5758	*	*
	* 4.9870	* 4.5945	* 4.7218	* 5.0550	* 6.3619	* 8.3020	*	*
	* 4.2790	* 3.9079	* 4.0109	* 4.2991	* 5.4126	* 6.9185	*	*
	* 3.4367	* 3.0944	* 3.1375	* 3.3110	* 4.1104	* 5.0404	*	*
15	* 7.7948	* 7.1730	* 7.4024	* 8.4668	* 4 EFPD	118 % POWER		
	* 8.7140	* 7.9834	* 8.2048	* 9.4008	* 50 EFPD	118 % POWER		
	* 8.4562	* 7.6693	* 7.8803	* 9.0454	* 200 EFPD	118 % POWER		
	* 6.9986	* 6.3465	* 6.5074	* 7.4451	* 300 EFPD	118 % POWER		
	* 5.0947	* 4.6409	* 4.7176	* 5.3154	* 470 EFPD	118 % POWER		

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 253 of 268

TABLE 7

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) POWER ESCALATION

AT 118% POWER, 4 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8*	3.1431	3.9047	4.1216	3.7889	4.3452	3.9845	4.7705	7.3257
9*	3.9047	3.8987	3.5793	4.2637	3.8706	4.3823	4.3756	6.7553
10*	4.1216	3.5812	4.1466	3.8534	4.3749	4.5481	4.4035	6.9449
11*	3.7889	4.2554	3.8485	4.3477	3.8415	4.3227	4.6724	7.8614
12*	4.3452	3.8635	4.3695	3.8415	4.2231	4.1998	5.6870	
13*	3.9845	4.3828	4.5478	4.3224	4.1998	4.7206	7.4242	
14*	4.7705	4.3756	4.4035	4.6724	5.6873	7.4237		
15 *	7.3257	6.7345	6.9456	7.8611				

AT 118% POWER, 4 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8*	2.2315	1.7934	1.9452	2.2046	2.2478	2.2693	2.4707	3.9284
9*	1.7934	1.8118	1.9813	2.1656	2.1674	2.1208	2.1376	3.3652
10*	1.9452	1.9813	2.1351	2.2574	2.0821	2.0788	2.1596	3.9103
11*	2.2046	2.1642	2.2524	2.2067	2.1474	2.1149	2.1964	4.3329
12*	2.2478	2.1674	2.0821	2.1452	2.1113	2.0765	3.2261	
13*	2.2693	2.1208	2.0788	2.1147	2.0751	2.2461	4.1252	
14*	2.4707	2.1376	2.1597	2.1971	3.2261	4.1252		
15 *	3.9284	3.3618	3.9103	4.3329				

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) POWER ESCALATION

AT 118% POWER, 4 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8*	1.8872	1.4878	1.6136	1.8186	1.8864	1.8562	2.0378	3.2753
9*	1.4878	1.5034	1.6206	1.8075	1.7606	1.7461	1.7164	2.7641
10*	1.6136	1.6227	1.7834	1.8587	1.7095	1.6929	1.7271	3.2543
11*	1.8186	1.8065	1.8582	1.8302	1.7332	1.7338	1.7460	3.5942
12*	1.8864	1.7602	1.7095	1.7332	1.7555	1.6678	2.6904	
13*	1.8562	1.7470	1.6929	1.7325	1.6678	1.7838	3.4400	
14*	2.0378	1.7164	1.7257	1.7445	2.6883	3.4399		
15 *	3.2753	2.7618	3.2498	3.5943				

AT 118% POWER, 4 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8*	1.7472	1.3615	1.4633	1.6157	1.6868	1.6334	1.8182	2.9635
9*	1.3615	1.3733	1.4529	1.6248	1.5546	1.5656	1.4982	2.4841
10*	1.4633	1.4544	1.6042	1.6364	1.5297	1.5124	1.5049	2.9127
11*	1.6157	1.6229	1.6374	1.6322	1.5212	1.5355	1.5124	3.2035
12*	1.6868	1.5554	1.5305	1.5212	1.5468	1.4470	2.3959	
13*	1.6334	1.5663	1.5114	1.5358	1.4470	1.5278	3.0618	
14*	1.8182	1.4983	1.5049	1.5124	2.3935	3.0579		
15 *	2.9635	2.4804	2.9125	3.1993				

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 254 of 268

TABLE 7 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) POWER ESCALATION

AT 118% POWER, 4 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8*	1.7366	1.3417	1.4312	1.5626	1.6245	1.5688	1.7509	2.8903
9*	1.3417	1.3507	1.4161	1.5732	1.4958	1.5106	1.4309	2.4154
10*	1.4312	1.4185	1.5552	1.5722	1.4744	1.4549	1.4362	2.8177
11*	1.5626	1.5714	1.5731	1.5679	1.4563	1.4684	1.4319	3.0921
12*	1.6245	1.4965	1.4751	1.4563	1.4720	1.3729	2.3005	
13*	1.5688	1.5110	1.4540	1.4677	1.3729	1.4323	2.9440	
14*	1.7509	1.4309	1.4362	1.4313	2.3004	2.9453		
15 *	2.8903	2.4102	2.8176	3.0921				

AT 118% POWER, 4 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8*	1.7703	1.3619	1.4470	1.5706	1.6216	1.5647	1.7467	2.9080
9*	1.3619	1.3703	1.4318	1.5800	1.4929	1.5053	1.4230	2.4282
10*	1.4470	1.4329	1.5641	1.5693	1.4679	1.4454	1.4263	2.8243
11*	1.5706	1.5785	1.5702	1.5618	1.4481	1.4524	1.4181	3.0935
12*	1.6216	1.4929	1.4694	1.4481	1.4520	1.3549	2.2913	
13*	1.5647	1.5066	1.4445	1.4518	1.3552	1.4085	2.9384	
14*	1.7467	1.4221	1.4264	1.4181	2.2912	2.9397		
15 *	2.9080	2.4229	2.8242	3.0935				

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) POWER ESCALATION

AT 118% POWER, 4 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8*	1.8230	1.3959	1.4771	1.6001	1.6368	1.5824	1.7579	2.9374
9*	1.3959	1.4036	1.4659	1.6034	1.5098	1.5176	1.4338	2.4552
10*	1.4771	1.4674	1.5892	1.5899	1.4790	1.4512	1.4372	2.8547
11*	1.6001	1.6019	1.5896	1.5749	1.4603	1.4545	1.4263	3.1250
12*	1.6368	1.5098	1.4803	1.4603	1.4515	1.3612	2.3073	
13*	1.5824	1.5190	1.4515	1.4536	1.3604	1.4130	2.9664	
14*	1.7579	1.4339	1.4373	1.4254	2.3072	2.9676		
15 *	2.9374	2.4489	2.8526	3.1250				

AT 118% POWER, 4 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8*	1.9358	1.4751	1.5538	1.6679	1.6989	1.6341	1.8193	3.0495
9*	1.4751	1.4818	1.5363	1.6727	1.5613	1.5738	1.4785	2.5520
10*	1.5538	1.5380	1.6624	1.6483	1.5362	1.5047	1.4813	2.9597
11*	1.6679	1.6710	1.6493	1.6403	1.5117	1.5056	1.4708	3.2487
12*	1.6989	1.5621	1.5376	1.5117	1.5047	1.4080	2.3964	
13*	1.6341	1.5753	1.5040	1.5046	1.4080	1.4600	3.0903	
14*	1.8193	1.4775	1.4814	1.4702	2.3938	3.0876		
15 *	3.0495	2.5481	2.9609	3.2440				

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 255 of 268

TABLE 7 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) POWER ESCALATION

AT 118% POWER, 4 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8*	2.0718	1.5681	1.6426	1.7574	1.7789	1.7104	1.8974	3.1818
9*	1.5681	1.5728	1.6253	1.7599	1.6339	1.6452	1.5429	2.6672
10*	1.6426	1.6271	1.7498	1.7301	1.6060	1.5705	1.5449	3.0928
11*	1.7574	1.7567	1.7312	1.7205	1.5796	1.5690	1.5331	3.4034
12*	1.7789	1.6352	1.6079	1.5796	1.5780	1.4721	2.5039	
13*	1.7104	1.6468	1.5697	1.5690	1.4711	1.5269	3.2388	
14*	1.8974	1.5418	1.5450	1.5331	2.5039	3.2359		
15 *	3.1818	2.6608	3.0926	3.3983				

AT 118% POWER, 4 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8*	2.2599	1.7074	1.7771	1.8880	1.9010	1.8269	2.0199	3.4043
9*	1.7074	1.7095	1.7601	1.8912	1.7490	1.7581	1.6464	2.8458
10*	1.7771	1.7628	1.8869	1.8602	1.7239	1.6830	1.6521	3.3036
11*	1.8880	1.8891	1.8615	1.8543	1.6974	1.6840	1.6450	3.6357
12*	1.9010	1.7501	1.7257	1.6974	1.7046	1.5869	2.6971	
13*	1.8269	1.7600	1.6817	1.6831	1.5869	1.6515	3.4965	
14*	2.0199	1.6465	1.6508	1.6437	2.6938	3.4984		
15 *	3.4043	2.8421	3.3034	3.6358				

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) POWER ESCALATION

AT 118% POWER, 4 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8*	2.4408	1.8379	1.9016	1.9864	2.0036	1.9139	2.1201	3.5654
9*	1.8379	1.8397	1.8762	2.0063	1.8417	1.8553	1.7264	2.9905
10*	1.9016	1.8791	2.0062	1.9698	1.8280	1.7826	1.7296	3.4724
11*	1.9864	2.0027	1.9712	1.9707	1.7886	1.7777	1.7299	3.8399
12*	2.0036	1.8428	1.8305	1.7886	1.8021	1.6682	2.8514	
13*	1.9139	1.8589	1.7816	1.7781	1.6682	1.7371	3.6977	
14*	2.1201	1.7265	1.7296	1.7304	2.8477	3.6918		
15 *	3.5654	2.9825	3.4669	3.8334				

AT 118% POWER, 4 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8*	2.5124	1.8983	1.9631	2.0468	2.0676	1.9797	2.2162	3.7621
9*	1.8983	1.8994	1.9304	2.0686	1.9102	1.9334	1.8034	3.1660
10*	1.9631	1.9316	2.0684	2.0434	1.9085	1.8667	1.8066	3.6802
11*	2.0468	2.0660	2.0449	2.0646	1.8698	1.8691	1.8204	4.0745
12*	2.0676	1.9113	1.9107	1.8698	1.9090	1.7684	3.0241	
13*	1.9797	1.9357	1.8657	1.8681	1.7684	1.8587	3.9568	
14*	2.2162	1.8034	1.8066	1.8194	3.0240	3.9593		
15 *	3.7621	3.1571	3.6760	4.0746				

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 256 of 268

TABLE 7 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) POWER ESCALATION

AT 118% POWER, 4 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8*	2.5409	1.9229	1.9871	2.0637	2.0827	1.9950	2.2262	3.7922
9*	1.9229	1.9240	1.9530	2.0901	1.9232	1.9432	1.8122	3.1866
10*	1.9871	1.9557	2.0912	2.0605	1.9213	1.8759	1.8161	3.7067
11*	2.0637	2.0875	2.0620	2.0821	1.8812	1.8773	1.8291	4.1071
12*	2.0827	1.9244	1.9225	1.8812	1.9197	1.7786	3.0477	
13*	1.9950	1.9466	1.8748	1.8773	1.7776	1.8713	4.0157	
14*	2.2262	1.8123	1.8161	1.8280	3.0449	4.0111		
15 *	3.7922	3.1805	3.7065	4.1072				

AT 118% POWER, 4 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8*	2.4964	1.8994	1.9552	2.0035	2.0232	1.9316	2.1556	3.6534
9*	1.8994	1.9004	1.9166	2.0387	1.8732	1.8946	1.7584	3.0743
10*	1.9552	1.9180	2.0447	2.0189	1.8863	1.8404	1.7634	3.5754
11*	2.0035	2.0363	2.0177	2.0496	1.8453	1.8427	1.7889	3.9772
12*	2.0232	1.8743	1.8874	1.8453	1.8888	1.7445	2.9739	
13*	1.9316	1.8967	1.8394	1.8417	1.7445	1.8370	3.8887	
14*	2.1556	1.7584	1.7634	1.7889	2.9739	3.8918		
15 *	3.6534	3.0659	3.5752	3.9726				

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) POWER ESCALATION

AT 118% POWER, 4 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8*	2.3775	1.7825	1.8335	1.8740	1.8993	1.8095	2.0231	3.4325
9*	1.7825	1.7849	1.7905	1.9138	1.7509	1.7802	1.6432	2.8888
10*	1.8335	1.7931	1.9162	1.8759	1.7626	1.7210	1.6456	3.3441
11*	1.8740	1.9102	1.8787	1.9117	1.7167	1.7203	1.6596	3.7131
12*	1.8993	1.7519	1.7645	1.7167	1.7700	1.6244	2.7677	
13*	1.8095	1.7818	1.7199	1.7194	1.6233	1.7035	3.6373	
14*	2.0231	1.6432	1.6456	1.6600	2.7683	3.6333		
15 *	3.4325	2.8814	3.3439	3.7080				

AT 118% POWER, 4 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8*	2.2432	1.6802	1.7313	1.7676	1.7940	1.7070	1.9127	3.2570
9*	1.6802	1.6827	1.6877	1.8100	1.6489	1.6779	1.5451	2.7390
10*	1.7313	1.6885	1.8109	1.7663	1.6579	1.6162	1.5483	3.1665
11*	1.7676	1.8062	1.7674	1.7983	1.6117	1.6123	1.5556	3.5156
12*	1.7940	1.6498	1.6596	1.6117	1.6581	1.5188	2.6037	
13*	1.7070	1.6805	1.6154	1.6115	1.5179	1.5915	3.4207	
14*	1.9127	1.5452	1.5480	1.5549	2.6011	3.4174		
15 *	3.2570	2.7325	3.1666	3.5120				

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 257 of 268

TABLE 7 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) POWER ESCALATION

AT 118% POWER, 4 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A

8*	2.1347	1.6042	1.6553	1.6945	1.7185	1.6356	1.8311	3.1423
9*	1.6042	1.6057	1.6132	1.7333	1.5752	1.6016	1.4757	2.6342
10*	1.6553	1.6151	1.7348	1.6895	1.5815	1.5392	1.4814	3.0437
11*	1.6945	1.7306	1.6906	1.7170	1.5398	1.5345	1.4834	3.3763
12*	1.7185	1.5761	1.5832	1.5398	1.5766	1.4463	2.4872	
13*	1.6356	1.6040	1.5385	1.5338	1.4463	1.5133	3.2728	
14*	1.8311	1.4758	1.4815	1.4827	2.4853	3.2739		
15 *	3.1423	2.6280	3.0408	3.3764				

AT 118% POWER, 4 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A

8*	2.0188	1.5239	1.5750	1.6063	1.6376	1.5518	1.7496	3.0104
9*	1.5239	1.5245	1.5248	1.6499	1.4913	1.5242	1.3961	2.5248
10*	1.5750	1.5266	1.6485	1.5993	1.5014	1.4588	1.3997	2.9117
11*	1.6063	1.6472	1.6011	1.6318	1.4544	1.4509	1.3972	3.2265
12*	1.6376	1.4920	1.5027	1.4544	1.4846	1.3616	2.3610	
13*	1.5518	1.5264	1.4582	1.4502	1.3612	1.4213	3.1108	
14*	1.7496	1.3962	1.3991	1.3967	2.3593	3.1081		
15 *	3.0104	2.5191	2.9091	3.2268				

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) POWER ESCALATION

AT 118% POWER, 4 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A

8*	1.9471	1.4701	1.5245	1.5603	1.5965	1.5123	1.7121	2.9558
9*	1.4701	1.4713	1.4721	1.6033	1.4505	1.4858	1.3580	2.4825
10*	1.5245	1.4726	1.6009	1.5527	1.4602	1.4182	1.3602	2.8609
11*	1.5603	1.6014	1.5549	1.5887	1.4100	1.4083	1.3557	3.1739
12*	1.5965	1.4512	1.4622	1.4106	1.4343	1.3203	2.3018	
13*	1.5123	1.4878	1.4175	1.4077	1.3197	1.3752	3.0392	
14*	1.7121	1.3582	1.3603	1.3551	2.3019	3.0364		
15 *	2.9558	2.4751	2.8583	3.1711				

AT 118% POWER, 4 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A

8*	1.9354	1.4593	1.5190	1.5630	1.5990	1.5199	1.7302	3.0002
9*	1.4593	1.4617	1.4676	1.6054	1.4583	1.4938	1.3695	2.5159
10*	1.5190	1.4696	1.6018	1.5563	1.4661	1.4231	1.3719	2.9027
11*	1.5630	1.6031	1.5567	1.5917	1.4154	1.4138	1.3669	3.2244
12*	1.5990	1.4590	1.4674	1.4153	1.4401	1.3239	2.3267	
13*	1.5199	1.4966	1.4224	1.4138	1.3240	1.3856	3.0821	
14*	1.7302	1.3696	1.3713	1.3663	2.3268	3.0794		
15 *	3.0002	2.5096	2.9009	3.2213				

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 258 of 268

TABLE 7 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) POWER ESCALATION

AT 118% POWER, 4 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8*	1.9417	1.4613	1.5244	1.5707	1.6049	1.5295	1.7559	3.0592
9*	1.4613	1.4644	1.4714	1.6126	1.4679	1.5093	1.3920	2.5691
10*	1.5244	1.4730	1.6085	1.5648	1.4787	1.4394	1.3938	2.9676
11*	1.5707	1.6090	1.5657	1.6023	1.4296	1.4293	1.3884	3.3045
12*	1.6049	1.4686	1.4811	1.4296	1.4519	1.3364	2.3651	
13*	1.5295	1.5125	1.4387	1.4287	1.3364	1.4075	3.1346	
14*	1.7559	1.3914	1.3932	1.3878	2.3651	3.1318		
15 *	3.0592	2.5619	2.9675	3.3024				

AT 118% POWER, 4 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8*	2.0782	1.5726	1.6328	1.6721	1.6948	1.6353	1.8852	3.3184
9*	1.5726	1.5759	1.5861	1.7106	1.5824	1.6214	1.5216	2.8021
10*	1.6328	1.5865	1.7097	1.6762	1.5883	1.5599	1.5327	3.2631
11*	1.6721	1.7080	1.6771	1.7024	1.5358	1.5411	1.5387	3.6388
12*	1.6948	1.5832	1.5898	1.5358	1.5458	1.4401	2.5598	
13*	1.6353	1.6225	1.5592	1.5404	1.4395	1.5511	3.4033	
14*	1.8852	1.5214	1.5319	1.5379	2.5591	3.4011		
15 *	3.3184	2.7951	3.2609	3.6376				

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) POWER ESCALATION

AT 118% POWER, 4 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8*	2.5058	2.0510	2.0925	1.9529	1.9888	1.9532	2.2880	4.0056
9*	2.0510	2.0390	1.9237	2.1181	1.9192	2.0318	1.8759	3.4928
10*	2.0925	1.9250	2.1102	1.9788	2.0380	2.0321	1.9208	4.0173
11*	1.9529	2.1150	1.9788	2.1200	1.8616	1.8844	1.9148	4.4441
12*	1.9888	1.9197	2.0405	1.8612	1.8388	1.7337	3.0627	
13*	1.9532	2.0346	2.0312	1.8834	1.7334	1.9221	4.1093	
14*	2.2880	1.8759	1.9204	1.9144	3.0627	4.1060		
15 *	4.0056	3.4880	4.0174	4.4441				

AT 118% POWER, 4 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8*	3.6914	4.5435	4.3523	3.5873	4.1205	3.6505	4.6189	7.7948
9*	4.5435	4.2786	3.6390	4.2410	3.5874	4.2181	4.1328	7.1797
10*	4.3523	3.6347	4.2921	3.6450	4.3181	4.5069	4.2035	7.4018
11*	3.5873	4.2351	3.6450	4.1805	3.5019	4.0343	4.4154	8.4672
12*	4.1205	3.5874	4.3189	3.5019	3.9191	3.7800	5.7232	
13*	3.6505	4.2188	4.5065	4.0340	3.7800	4.3135	7.7463	
14*	4.6189	4.1309	4.2036	4.4089	5.7168	7.7457		
15 *	7.7948	7.1730	7.4024	8.4668				

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 259 of 268

TABLE 8

F-DEL-H & M-DEL-H VALUES - NORMAL OPERATION

AT 100% POWER, 4 EFPD

	H	G	F	E	D	C	B	A
8	* 1.0950	* 1.4440	* 1.3890	* 1.2000	* 1.3010	* 1.2250	* 1.1870	* .6880
	* 1.4422	* 1.1088	* 1.1926	* 1.3547	* 1.2424	* 1.3155	* 1.3292	* 2.2367
9	* 1.4440	* 1.4430	* 1.2870	* 1.3080	* 1.2690	* 1.3750	* 1.3250	* .8260
	* 1.1088	* 1.1473	* 1.2980	* 1.2452	* 1.2850	* 1.1765	* 1.2111	* 1.8633
10	* 1.3890	* 1.2860	* 1.3130	* 1.1980	* 1.3980	* 1.4210	* 1.3210	* .7090
	* 1.1926	* 1.2998	* 1.2532	* 1.3939	* 1.1848	* 1.1714	* 1.2430	* 2.2071
11	* 1.2000	* 1.3100	* 1.1970	* 1.3020	* 1.2970	* 1.4200	* 1.3040	* .6400
	* 1.3547	* 1.2438	* 1.3951	* 1.2726	* 1.2854	* 1.1734	* 1.2719	* 2.4851
12	* 1.3010	* 1.2690	* 1.3970	* 1.2970	* 1.3920	* 1.3650	* .8770	*
	* 1.2424	* 1.2856	* 1.1856	* 1.2854	* 1.1801	* 1.2145	* 1.8675	*
13	* 1.2250	* 1.3730	* 1.4210	* 1.4210	* 1.3660	* 1.2780	* .6640	*
	* 1.3155	* 1.1776	* 1.1713	* 1.1726	* 1.2140	* 1.2842	* 2.4348	*
14	* 1.1870	* 1.3250	* 1.3210	* 1.3050	* .8770	* .6640	*	*
	* 1.3292	* 1.2111	* 1.2421	* 1.2719	* 1.8654	* 2.4345	*	*
15	* .6880	* .8270	* .7090	* .6410	* F-DEL-H			
	* 2.2367	* 1.8592	* 2.2071	* 2.4851	* M-DEL-H			

AT 100% POWER, 50 EFPD

	H	G	F	E	D	C	B	A
8	* .9440	* 1.2960	* 1.2950	* 1.2490	* 1.3180	* 1.2640	* 1.1640	* .6650
	* 1.6640	* 1.2631	* 1.2628	* 1.3145	* 1.2248	* 1.2909	* 1.3540	* 2.3127
9	* 1.2960	* 1.2880	* 1.2310	* 1.3140	* 1.2710	* 1.3300	* 1.3180	* .8060
	* 1.2631	* 1.2766	* 1.3489	* 1.2304	* 1.2960	* 1.2122	* 1.2285	* 1.9142
10	* 1.2950	* 1.2310	* 1.3060	* 1.2430	* 1.3530	* 1.3530	* 1.3130	* .7000
	* 1.2628	* 1.3473	* 1.2508	* 1.3452	* 1.2239	* 1.2247	* 1.2612	* 2.2338
11	* 1.2490	* 1.3150	* 1.2420	* 1.3130	* 1.2890	* 1.3690	* 1.2770	* .6300
	* 1.3145	* 1.2293	* 1.3463	* 1.2598	* 1.3044	* 1.2104	* 1.2998	* 2.5192
12	* 1.3180	* 1.2700	* 1.3520	* 1.2890	* 1.3890	* 1.3640	* .8540	*
	* 1.2248	* 1.2960	* 1.2249	* 1.3044	* 1.1790	* 1.2256	* 1.9085	*
13	* 1.2640	* 1.3280	* 1.3530	* 1.3700	* 1.3640	* 1.2800	* .6530	*
	* 1.2909	* 1.2131	* 1.2238	* 1.2097	* 1.2255	* 1.2935	* 2.4631	*
14	* 1.1640	* 1.3180	* 1.3130	* 1.2770	* .8540	* .6540	*	*
	* 1.3540	* 1.2286	* 1.2610	* 1.2996	* 1.9068	* 2.4601	*	*
15	* .6650	* .8070	* .7000	* .6310	* F-DEL-H			
	* 2.3127	* 1.9098	* 2.2317	* 2.5183	* M-DEL-H			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 260 of 268

TABLE 8 (CONTINUED)

F-DEL-H & M-DEL-H VALUES - NORMAL OPERATION

AT 100% POWER, 200 EFPD

	H	G	F	E	D	C	B	A
8	* .7840	* 1.1320	* 1.2730	* 1.3670	* 1.3340	* 1.3260	* 1.1060	* .6320
	* 2.0224	* 1.4180	* 1.2848	* 1.1976	* 1.2201	* 1.2199	* 1.4292	* 2.3733
9	* 1.1320	* 1.2180	* 1.3340	* 1.3360	* 1.3510	* 1.2730	* 1.2720	* .7730
	* 1.4180	* 1.3308	* 1.2353	* 1.2216	* 1.2121	* 1.2634	* 1.2576	* 2.0049
10	* 1.2730	* 1.3360	* 1.3290	* 1.3600	* 1.2980	* 1.2080	* 1.2830	* .6830
	* 1.2848	* 1.2336	* 1.2403	* 1.2364	* 1.2725	* 1.3512	* 1.2576	* 2.2974
11	* 1.3670	* 1.3370	* 1.3620	* 1.3150	* 1.3310	* 1.2580	* 1.1940	* .6080
	* 1.1976	* 1.2207	* 1.2346	* 1.2618	* 1.2469	* 1.3042	* 1.3742	* 2.6139
12	* 1.3340	* 1.3510	* 1.2980	* 1.3310	* 1.3290	* 1.3240	* .7970	*
	* 1.2201	* 1.2121	* 1.2724	* 1.2469	* 1.2240	* 1.2390	* 2.0072	*
13	* 1.3260	* 1.2730	* 1.2080	* 1.2590	* 1.3240	* 1.2320	* .6270	*
	* 1.2199	* 1.2643	* 1.3512	* 1.3035	* 1.2387	* 1.3158	* 2.5181	*
14	* 1.1060	* 1.2720	* 1.2840	* 1.1950	* .7970	* .6270	*	*
	* 1.4292	* 1.2577	* 1.2576	* 1.3734	* 2.0064	* 2.5155	*	*
15	* .6320	* .7740	* .6840	* .6080	* F-DEL-H			
	* 2.3733	* 2.0002	* 2.2975	* 2.6140	* M-DEL-H			

AT 100% POWER, 300 EFPD

	H	G	F	E	D	C	B	A
8	* .7640	* 1.0880	* 1.2480	* 1.3980	* 1.3090	* 1.3520	* 1.0930	* .6440
	* 2.0422	* 1.4458	* 1.2684	* 1.1588	* 1.2057	* 1.1657	* 1.4060	* 2.3333
9	* 1.0880	* 1.1910	* 1.3620	* 1.3110	* 1.3790	* 1.2440	* 1.2640	* .7840
	* 1.4458	* 1.3410	* 1.1800	* 1.2074	* 1.1738	* 1.2544	* 1.2355	* 1.9216
10	* 1.2480	* 1.3640	* 1.3070	* 1.3920	* 1.2690	* 1.1620	* 1.2800	* .6980
	* 1.2684	* 1.1783	* 1.2250	* 1.1787	* 1.2647	* 1.3646	* 1.2509	* 2.1962
11	* 1.3980	* 1.3120	* 1.3930	* 1.2910	* 1.3520	* 1.2230	* 1.1840	* .6220
	* 1.1588	* 1.2065	* 1.1779	* 1.2498	* 1.1918	* 1.2976	* 1.3539	* 2.4980
12	* 1.3090	* 1.3790	* 1.2690	* 1.3520	* 1.2930	* 1.3140	* .7990	*
	* 1.2057	* 1.1738	* 1.2656	* 1.1917	* 1.2147	* 1.2114	* 1.9674	*
13	* 1.3520	* 1.2430	* 1.1620	* 1.2240	* 1.3140	* 1.2290	* .6390	*
	* 1.1657	* 1.2551	* 1.3647	* 1.2976	* 1.2114	* 1.2826	* 2.4242	*
14	* 1.0930	* 1.2640	* 1.2810	* 1.1850	* .7990	* .6390	*	*
	* 1.4060	* 1.2355	* 1.2510	* 1.3537	* 1.9674	* 2.4242	*	*
15	* .6440	* .7860	* .6980	* .6220	* F-DEL-H			
	* 2.3333	* 1.9195	* 2.1963	* 2.4972	* M-DEL-H			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 261 of 268

TABLE 8 (CONTINUED)

F-DEL-H & M-DEL-H VALUES - NORMAL OPERATION

AT 100% POWER, 470 EFPD

	H	G	F	E	D	C	B	A
8	* .7660 *	* 1.0390 *	* 1.1770 *	* 1.3470 *	* 1.2330 *	* 1.3270 *	* 1.0980 *	* .6990 *
	* 2.0345 *	* 1.5040 *	* 1.3103 *	* 1.1543 *	* 1.2463 *	* 1.1642 *	* 1.3833 *	* 2.1269 *
9	* 1.0390 *	* 1.1330 *	* 1.3240 *	* 1.2300 *	* 1.3400 *	* 1.1980 *	* 1.2910 *	* .8430 *
	* 1.5040 *	* 1.3793 *	* 1.1854 *	* 1.2509 *	* 1.1615 *	* 1.2760 *	* 1.2000 *	* 1.7739 *
10	* 1.1770 *	* 1.3250 *	* 1.2260 *	* 1.3420 *	* 1.2010 *	* 1.1210 *	* 1.2940 *	* .7580 *
	* 1.3103 *	* 1.1845 *	* 1.2698 *	* 1.1800 *	* 1.3043 *	* 1.3882 *	* 1.2099 *	* 2.0040 *
11	* 1.3470 *	* 1.2300 *	* 1.3420 *	* 1.2170 *	* 1.3310 *	* 1.1970 *	* 1.2150 *	* .6850 *
	* 1.1543 *	* 1.2500 *	* 1.1792 *	* 1.2860 *	* 1.1795 *	* 1.3003 *	* 1.3060 *	* 2.2472 *
12	* 1.2330 *	* 1.3400 *	* 1.2010 *	* 1.3310 *	* 1.2410 *	* 1.3260 *	* .8420 *	
	* 1.2463 *	* 1.1608 *	* 1.3042 *	* 1.1795 *	* 1.2317 *	* 1.1791 *	* 1.8339 *	
13	* 1.3270 *	* 1.1970 *	* 1.1220 *	* 1.1970 *	* 1.3260 *	* 1.2490 *	* .6990 *	
	* 1.1642 *	* 1.2762 *	* 1.3882 *	* 1.3003 *	* 1.1791 *	* 1.2428 *	* 2.1751 *	
14	* 1.0980 *	* 1.2910 *	* 1.2940 *	* 1.2150 *	* .8410 *	* .6990 *		
	* 1.3833 *	* 1.2000 *	* 1.2099 *	* 1.3060 *	* 1.8349 *	* 2.1721 *		
15	* .6990 *	* .8440 *	* .7580 *	* .6850 *	F-DEL-H			
	* 2.1269 *	* 1.7721 *	* 2.0040 *	* 2.2472 *	M-DEL-H			

AT 75% POWER, 4 EFPD

	H	G	F	E	D	C	B	A
8	* 1.0150 *	* 1.4350 *	* 1.3970 *	* 1.2190 *	* 1.3290 *	* 1.2530 *	* 1.2160 *	* .6970 *
	* 1.7833 *	* 1.3581 *	* 1.4157 *	* 1.6024 *	* 1.4604 *	* 1.5451 *	* 1.5577 *	* 2.6298 *
9	* 1.4350 *	* 1.4270 *	* 1.2890 *	* 1.3280 *	* 1.2940 *	* 1.4080 *	* 1.3570 *	* .8360 *
	* 1.3581 *	* 1.3667 *	* 1.5634 *	* 1.4579 *	* 1.5223 *	* 1.3715 *	* 1.4258 *	* 2.1943 *
10	* 1.3970 *	* 1.2880 *	* 1.3270 *	* 1.2080 *	* 1.4160 *	* 1.4410 *	* 1.3510 *	* .7120 *
	* 1.4157 *	* 1.5637 *	* 1.4874 *	* 1.6508 *	* 1.3930 *	* 1.3762 *	* 1.4517 *	* 2.6336 *
11	* 1.2190 *	* 1.3300 *	* 1.2090 *	* 1.2850 *	* 1.2990 *	* 1.4250 *	* 1.3160 *	* .6380 *
	* 1.6024 *	* 1.4559 *	* 1.6495 *	* 1.5720 *	* 1.5984 *	* 1.4619 *	* 1.5594 *	* 2.9860 *
12	* 1.3290 *	* 1.2940 *	* 1.4140 *	* 1.2990 *	* 1.2510 *	* 1.3250 *	* .8600 *	
	* 1.4604 *	* 1.5223 *	* 1.3948 *	* 1.5984 *	* 1.4742 *	* 1.5228 *	* 2.3402 *	
13	* 1.2530 *	* 1.4060 *	* 1.4410 *	* 1.4250 *	* 1.3250 *	* 1.2240 *	* .6350 *	
	* 1.5451 *	* 1.3733 *	* 1.3762 *	* 1.4615 *	* 1.5217 *	* 1.6163 *	* 3.0345 *	
14	* 1.2160 *	* 1.3570 *	* 1.3520 *	* 1.3160 *	* .8610 *	* .6360 *		
	* 1.5577 *	* 1.4248 *	* 1.4517 *	* 1.5594 *	* 2.3402 *	* 3.0326 *		
15	* .6970 *	* .8380 *	* .7120 *	* .6380 *	F-DEL-H			
	* 2.6298 *	* 2.1897 *	* 2.6337 *	* 2.9861 *	M-DEL-H			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 262 of 268

TABLE 8 (CONTINUED)

F-DEL-H & M-DEL-H VALUES - NORMAL OPERATION

AT 75% POWER, 50 EFPD

	H	G	F	E	D	C	B	A
8	* .8850	* 1.2880	* 1.3020	* 1.2740	* 1.3470	* 1.2930	* 1.1900	* .6720
	* 2.0877	* 1.5328	* 1.4828	* 1.5458	* 1.4522	* 1.5148	* 1.6128	* 2.7346
9	* 1.2880	* 1.2840	* 1.2430	* 1.3390	* 1.2950	* 1.3590	* 1.3500	* .8140
	* 1.5328	* 1.5245	* 1.5847	* 1.4507	* 1.5320	* 1.4344	* 1.4453	* 2.2730
10	* 1.3020	* 1.2460	* 1.3220	* 1.2560	* 1.3690	* 1.3670	* 1.3410	* .7040
	* 1.4828	* 1.5820	* 1.5099	* 1.6008	* 1.4487	* 1.4426	* 1.4803	* 2.6958
11	* 1.2740	* 1.3400	* 1.2570	* 1.3000	* 1.2900	* 1.3670	* 1.2860	* .6280
	* 1.5458	* 1.4500	* 1.5995	* 1.5765	* 1.6073	* 1.5085	* 1.6137	* 3.0835
12	* 1.3470	* 1.2950	* 1.3680	* 1.2900	* 1.2710	* 1.3200	* .8370	*
	* 1.4522	* 1.5308	* 1.4497	* 1.6063	* 1.4687	* 1.5107	* 2.4182	*
13	* 1.2930	* 1.3580	* 1.3670	* 1.3670	* 1.3210	* 1.2330	* .6260	*
	* 1.5148	* 1.4342	* 1.4429	* 1.5077	* 1.5106	* 1.5993	* 3.1042	*
14	* 1.1900	* 1.3500	* 1.3410	* 1.2860	* .8370	* .6260	*	*
	* 1.6128	* 1.4443	* 1.4804	* 1.6121	* 2.4155	* 3.1000	*	*
15	* .6720	* .8160	* .7040	* .6280	* F-DEL-H			
	* 2.7346	* 2.2681	* 2.6914	* 3.0837	* M-DEL-H			

AT 75% POWER, 200 EFPD

	H	G	F	E	D	C	B	A
8	* .7460	* 1.1290	* 1.3000	* 1.4090	* 1.3740	* 1.3670	* 1.1330	* .6390
	* 2.5326	* 1.7499	* 1.4928	* 1.4063	* 1.4169	* 1.4312	* 1.6755	* 2.8855
9	* 1.1290	* 1.2320	* 1.3660	* 1.3730	* 1.3890	* 1.3080	* 1.3040	* .7820
	* 1.7499	* 1.5887	* 1.4657	* 1.4196	* 1.4242	* 1.4578	* 1.4859	* 2.3628
10	* 1.3000	* 1.3680	* 1.3570	* 1.3890	* 1.3190	* 1.2230	* 1.3080	* .6870
	* 1.4928	* 1.4630	* 1.4613	* 1.4616	* 1.4904	* 1.5779	* 1.4900	* 2.7267
11	* 1.4090	* 1.3740	* 1.3900	* 1.3240	* 1.3100	* 1.2260	* 1.1960	* .6040
	* 1.4063	* 1.4187	* 1.4602	* 1.5403	* 1.5358	* 1.5783	* 1.6797	* 3.1484
12	* 1.3740	* 1.3900	* 1.3180	* 1.3100	* 1.2440	* 1.2570	* .7710	*
	* 1.4169	* 1.4232	* 1.4907	* 1.5358	* 1.4984	* 1.5270	* 2.4970	*
13	* 1.3670	* 1.3080	* 1.2230	* 1.2270	* 1.2580	* 1.1640	* .5910	*
	* 1.4312	* 1.4588	* 1.5775	* 1.5773	* 1.5261	* 1.6270	* 3.1541	*
14	* 1.1330	* 1.3050	* 1.3080	* 1.1970	* .7710	* .5910	*	*
	* 1.6755	* 1.4850	* 1.4900	* 1.6797	* 2.4970	* 3.1541	*	*
15	* .6390	* .7830	* .6870	* .6040	* F-DEL-H			
	* 2.8855	* 2.3593	* 2.7268	* 3.1469	* M-DEL-H			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 263 of 268

TABLE 8 (CONTINUED)

F-DEL-H & M-DEL-H VALUES - NORMAL OPERATION

AT 75% POWER, 300 EFDP

	H	G	F	E	D	C	B	A
8	* .7220	* 1.0880	* 1.2830	* 1.4510	* 1.3570	* 1.4040	* 1.1270	* .6550
	* 2.5914	* 1.7786	* 1.4924	* 1.3508	* 1.4222	* 1.3773	* 1.6929	* 2.8141
9	* 1.0880	* 1.2110	* 1.4030	* 1.3550	* 1.4270	* 1.2850	* 1.3040	* .7980
	* 1.7786	* 1.5903	* 1.4096	* 1.4266	* 1.3678	* 1.4776	* 1.4735	* 2.3183
10	* 1.2830	* 1.4050	* 1.3400	* 1.4280	* 1.2930	* 1.1770	* 1.3080	* .7040
	* 1.4924	* 1.4077	* 1.4682	* 1.3991	* 1.5004	* 1.6149	* 1.4760	* 2.6499
11	* 1.4510	* 1.3560	* 1.4290	* 1.3010	* 1.3260	* 1.1780	* 1.1850	* .6180
	* 1.3508	* 1.4257	* 1.3982	* 1.5418	* 1.4737	* 1.6122	* 1.6730	* 3.0335
12	* 1.3570	* 1.4280	* 1.2920	* 1.3260	* 1.2020	* 1.2260	* .7670	
	* 1.4222	* 1.3678	* 1.5003	* 1.4737	* 1.5009	* 1.5048	* 2.4493	
13	* 1.4040	* 1.2840	* 1.1770	* 1.1790	* 1.2260	* 1.1340	* .5960	
	* 1.3773	* 1.4781	* 1.6149	* 1.6115	* 1.5044	* 1.5988	* 3.0428	
14	* 1.1270	* 1.3040	* 1.3090	* 1.1850	* .7670	* .5960		
	* 1.6929	* 1.4735	* 1.4760	* 1.6717	* 2.4493	* 3.0410		
15	* .6550	* .7990	* .7040	* .6190	F-DEL-H			
	* 2.8141	* 2.3129	* 2.6486	* 3.0333	M-DEL-H			

AT 75% POWER, 470 EFDP

	H	G	F	E	D	C	B	A
8	* .7040	* 1.0390	* 1.2230	* 1.4170	* 1.2960	* 1.4010	* 1.1550	* .7270
	* 2.6309	* 1.8694	* 1.5718	* 1.3635	* 1.4747	* 1.3737	* 1.6587	* 2.6124
9	* 1.0390	* 1.1590	* 1.3770	* 1.2880	* 1.4070	* 1.2580	* 1.3520	* .8740
	* 1.8694	* 1.6701	* 1.4141	* 1.4882	* 1.3692	* 1.5148	* 1.4251	* 2.1687
10	* 1.2230	* 1.3780	* 1.2670	* 1.3870	* 1.2320	* 1.1470	* 1.3410	* .7770
	* 1.5718	* 1.4130	* 1.5248	* 1.4045	* 1.5591	* 1.6586	* 1.4385	* 2.4352
11	* 1.4170	* 1.2880	* 1.3890	* 1.2260	* 1.2900	* 1.1340	* 1.2160	* .6890
	* 1.3635	* 1.4875	* 1.4035	* 1.5889	* 1.4878	* 1.6442	* 1.6011	* 2.7493
12	* 1.2960	* 1.4080	* 1.2310	* 1.2900	* 1.1040	* 1.1920	* .7980	
	* 1.4747	* 1.3692	* 1.5604	* 1.4878	* 1.5934	* 1.5211	* 2.3568	
13	* 1.4010	* 1.2570	* 1.1470	* 1.1340	* 1.1920	* 1.1200	* .6360	
	* 1.3737	* 1.5159	* 1.6586	* 1.6442	* 1.5211	* 1.6131	* 2.8479	
14	* 1.1550	* 1.3520	* 1.3410	* 1.2160	* .7980	* .6360		
	* 1.6587	* 1.4251	* 1.4378	* 1.6011	* 2.3568	* 2.8479		
15	* .7270	* .8760	* .7770	* .6890	F-DEL-H			
	* 2.6124	* 2.1649	* 2.4352	* 2.7493	M-DEL-H			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 264 of 268

TABLE 8 (CONTINUED)

F-DEL-H & M-DEL-H VALUES - NORMAL OPERATION

AT 50% POWER, 4 EFPD

	H	G	F	E	D	C	B	A
8	* .9700	* 1.4350	* 1.4110	* 1.2500	* 1.3680	* 1.2920	* 1.2570	* .7130
	* 1.8522	* 1.4055	* 1.5155	* 1.7261	* 1.5647	* 1.6644	* 1.6883	* 2.8677
9	* 1.4350	* 1.4100	* 1.2950	* 1.3570	* 1.3270	* 1.4520	* 1.4010	* .8550
	* 1.4055	* 1.4238	* 1.6908	* 1.5696	* 1.6340	* 1.4658	* 1.5361	* 2.4105
10	* 1.4110	* 1.2940	* 1.3470	* 1.2290	* 1.4460	* 1.4710	* 1.3890	* .7200
	* 1.5155	* 1.6909	* 1.6056	* 1.7814	* 1.4928	* 1.4609	* 1.5626	* 2.9090
11	* 1.2500	* 1.3590	* 1.2290	* 1.2790	* 1.2960	* 1.4230	* 1.3240	* .6380
	* 1.7261	* 1.5686	* 1.7828	* 1.6814	* 1.7211	* 1.5474	* 1.6987	* 3.3402
12	* 1.3680	* 1.3260	* 1.4440	* 1.2960	* 1.1720	* 1.2560	* .8370	*
	* 1.5647	* 1.6363	* 1.4928	* 1.7201	* 1.5483	* 1.6144	* 2.5300	*
13	* 1.2920	* 1.4500	* 1.4710	* 1.4240	* 1.2560	* 1.1400	* .5980	*
	* 1.6644	* 1.4677	* 1.4609	* 1.5464	* 1.6144	* 1.7178	* 3.3415	*
14	* 1.2570	* 1.4010	* 1.3900	* 1.3250	* .8370	* .5980	*	*
	* 1.6883	* 1.5341	* 1.5626	* 1.6963	* 2.5272	* 3.3372	*	*
15	* .7130	* .8570	* .7200	* .6380	F-DEL-H			
	* 2.8677	* 2.4055	* 2.9126	* 3.3403	M-DEL-H			

AT 50% POWER, 50 EFPD

	H	G	F	E	D	C	B	A
8	* .8470	* 1.2870	* 1.3260	* 1.3080	* 1.3860	* 1.3330	* 1.2260	* .6850
	* 2.2107	* 1.6221	* 1.6145	* 1.6788	* 1.5672	* 1.6443	* 1.7476	* 3.0368
9	* 1.2870	* 1.2960	* 1.2660	* 1.3730	* 1.3250	* 1.3960	* 1.3900	* .8280
	* 1.6221	* 1.6545	* 1.7298	* 1.5745	* 1.6626	* 1.5382	* 1.5691	* 2.5237
10	* 1.3260	* 1.2690	* 1.3450	* 1.2790	* 1.3950	* 1.3930	* 1.3750	* .7110
	* 1.6145	* 1.7273	* 1.6298	* 1.7453	* 1.5715	* 1.5616	* 1.6085	* 3.0021
11	* 1.3080	* 1.3750	* 1.2790	* 1.3020	* 1.2850	* 1.3570	* 1.2930	* .6270
	* 1.6788	* 1.5735	* 1.7440	* 1.6659	* 1.7132	* 1.5937	* 1.7480	* 3.4621
12	* 1.3860	* 1.3250	* 1.3930	* 1.2850	* 1.1990	* 1.2540	* .8130	*
	* 1.5672	* 1.6602	* 1.5715	* 1.7132	* 1.5464	* 1.6288	* 2.5801	*
13	* 1.3330	* 1.3950	* 1.3930	* 1.3570	* 1.2550	* 1.1560	* .5900	*
	* 1.6443	* 1.5392	* 1.5595	* 1.5933	* 1.6288	* 1.7054	* 3.3643	*
14	* 1.2260	* 1.3900	* 1.3750	* 1.2940	* .8130	* .5900	*	*
	* 1.7476	* 1.5702	* 1.6086	* 1.7471	* 2.5801	* 3.3644	*	*
15	* .6850	* .8300	* .7120	* .6270	F-DEL-H			
	* 3.0368	* 2.5210	* 3.0021	* 3.4670	M-DEL-H			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 265 of 268

TABLE 8 (CONTINUED)

F-DEL-H & M-DEL-H VALUES - NORMAL OPERATION

AT 50% POWER, 200 EFPD

	H	G	F	E	D	C	B	A
8	* .7040	* 1.1360	* 1.3480	* 1.4810	* 1.4430	* 1.4340	* 1.1450	* .6470
	* 2.7670	* 1.8613	* 1.6030	* 1.4971	* 1.5084	* 1.5265	* 1.8152	* 3.1325
9	* 1.1360	* 1.2530	* 1.4140	* 1.4350	* 1.4560	* 1.3660	* 1.3540	* .8000
	* 1.8613	* 1.6887	* 1.5612	* 1.5115	* 1.5169	* 1.5638	* 1.5934	* 2.6064
10	* 1.3480	* 1.4160	* 1.3450	* 1.4260	* 1.3540	* 1.2520	* 1.3480	* .7010
	* 1.6030	* 1.5591	* 1.5652	* 1.5620	* 1.6034	* 1.7006	* 1.6103	* 3.0213
11	* 1.4810	* 1.4360	* 1.4270	* 1.3290	* 1.3030	* 1.2010	* 1.2030	* .6070
	* 1.4971	* 1.5107	* 1.5602	* 1.6578	* 1.6381	* 1.6947	* 1.8012	* 3.4564
12	* 1.4430	* 1.4570	* 1.3530	* 1.3020	* 1.1330	* 1.1360	* .7370	*
	* 1.5084	* 1.5158	* 1.6033	* 1.6381	* 1.5770	* 1.6226	* 2.7148	*
13	* 1.4340	* 1.3650	* 1.2520	* 1.2010	* 1.1370	* 1.0430	* .5420	*
	* 1.5265	* 1.5635	* 1.7007	* 1.6940	* 1.6226	* 1.7261	* 3.4390	*
14	* 1.1450	* 1.3540	* 1.3480	* 1.2030	* .7370	* .5420	*	*
	* 1.8152	* 1.5937	* 1.6092	* 1.8013	* 2.7133	* 3.4362	*	*
15	* .6470	* .8010	* .7010	* .6070	* F-DEL-H			
	* 3.1325	* 2.6004	* 3.0213	* 3.4474	* M-DEL-H			

AT 50% POWER, 300 EFPD

	H	G	F	E	D	C	B	A
8	* .6780	* 1.0900	* 1.3250	* 1.5250	* 1.4240	* 1.4700	* 1.1250	* .6530
	* 2.4983	* 1.9090	* 1.5790	* 1.4408	* 1.4921	* 1.4748	* 1.7887	* 3.0512
9	* 1.0900	* 1.2210	* 1.4370	* 1.4150	* 1.4980	* 1.3380	* 1.3480	* .8130
	* 1.9090	* 1.6924	* 1.5053	* 1.4924	* 1.4620	* 1.5569	* 1.5924	* 2.5151
10	* 1.3250	* 1.4390	* 1.2810	* 1.4560	* 1.3270	* 1.2080	* 1.3520	* .7190
	* 1.5790	* 1.5031	* 1.5364	* 1.4766	* 1.5864	* 1.6846	* 1.5735	* 2.8624
11	* 1.5250	* 1.4160	* 1.4580	* 1.3010	* 1.3070	* 1.1600	* 1.1990	* .6250
	* 1.4408	* 1.4915	* 1.4765	* 1.6327	* 1.5665	* 1.7012	* 1.7298	* 3.1674
12	* 1.4240	* 1.4990	* 1.3270	* 1.3060	* 1.1010	* 1.1270	* .7410	*
	* 1.4921	* 1.4620	* 1.5871	* 1.5665	* 1.4181	* 1.6199	* 2.6504	*
13	* 1.4700	* 1.3380	* 1.2080	* 1.1600	* 1.1270	* 1.0320	* .5540	*
	* 1.4748	* 1.5577	* 1.6847	* 1.7002	* 1.6199	* 1.7232	* 3.3033	*
14	* 1.1250	* 1.3480	* 1.3520	* 1.1990	* .7410	* .5540	*	*
	* 1.7887	* 1.5924	* 1.5735	* 1.7300	* 2.6504	* 3.3023	*	*
15	* .6530	* .8140	* .7190	* .6250	* F-DEL-H			
	* 3.0512	* 2.5124	* 2.8624	* 3.1604	* M-DEL-H			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 266 of 268

TABLE 8 (CONTINUED)

F-DEL-H & M-DEL-H VALUES - NORMAL OPERATION

AT 50% POWER, 470 EFPD

	H	G	F	E	D	C	B	A
8	* .6540	* 1.0250	* 1.2420	* 1.4760	* 1.3500	* 1.4520	* 1.1200	* .7040
	* 2.1884	* 1.7953	* 1.5881	* 1.3555	* 1.5019	* 1.3752	* 1.7154	* 2.7445
9	* 1.0250	* 1.1370	* 1.3790	* 1.3280	* 1.4680	* 1.2990	* 1.3940	* .8840
	* 1.7953	* 1.6502	* 1.3899	* 1.5124	* 1.3627	* 1.5488	* 1.4150	* 2.2506
10	* 1.2420	* 1.3790	* 1.1480	* 1.4010	* 1.2610	* 1.1830	* 1.3950	* .7990
	* 1.5881	* 1.3888	* 1.5369	* 1.3670	* 1.5609	* 1.6773	* 1.4176	* 2.5157
11	* 1.4760	* 1.3290	* 1.4010	* 1.2090	* 1.2870	* 1.1400	* 1.2580	* .7100
	* 1.3555	* 1.5111	* 1.3659	* 1.5268	* 1.3648	* 1.6099	* 1.5376	* 2.8139
12	* 1.3500	* 1.4680	* 1.2600	* 1.2870	* 1.0340	* 1.1420	* .7990	*
	* 1.5019	* 1.3627	* 1.5599	* 1.3648	* 1.3064	* 1.4258	* 2.2982	*
13	* 1.4520	* 1.2980	* 1.1830	* 1.1400	* 1.1420	* 1.0760	* .6220	*
	* 1.3752	* 1.5479	* 1.6773	* 1.6099	* 1.4237	* 1.5498	* 2.8576	*
14	* 1.1200	* 1.3940	* 1.3950	* 1.2580	* .7990	* .6220	*	*
	* 1.7154	* 1.4150	* 1.4176	* 1.5376	* 2.2982	* 2.8576	*	*
15	* .7040	* .8860	* .7990	* .7100	* F-DEL-H			
	* 2.7445	* 2.2478	* 2.5158	* 2.8140	* M-DEL-H			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 267 of 268

TABLE 9

F-DEL-H & M-DEL-H VALUES - POWER ESCALATION

AT 100% POWER, 4 EFPD

	H	G	F	E	D	C	B	A
8	* 1.0950	* 1.4440	* 1.3890	* 1.2000	* 1.3010	* 1.2250	* 1.1870	* .6880
	* 1.4422	* 1.1088	* 1.1926	* 1.3547	* 1.2424	* 1.3155	* 1.3292	* 2.2367
9	* 1.4440	* 1.4430	* 1.2870	* 1.3080	* 1.2690	* 1.3750	* 1.3250	* .8260
	* 1.1088	* 1.1473	* 1.2980	* 1.2452	* 1.2850	* 1.1765	* 1.2111	* 1.8633
10	* 1.3890	* 1.2860	* 1.3130	* 1.1980	* 1.3980	* 1.4210	* 1.3210	* .7090
	* 1.1926	* 1.2998	* 1.2532	* 1.3939	* 1.1848	* 1.1714	* 1.2430	* 2.2071
11	* 1.2000	* 1.3100	* 1.1970	* 1.3020	* 1.2970	* 1.4200	* 1.3040	* .6400
	* 1.3547	* 1.2438	* 1.3951	* 1.2726	* 1.2854	* 1.1734	* 1.2719	* 2.4851
12	* 1.3010	* 1.2690	* 1.3970	* 1.2970	* 1.3920	* 1.3650	* .8770	*
	* 1.2424	* 1.2856	* 1.1856	* 1.2854	* 1.1801	* 1.2145	* 1.8675	*
13	* 1.2250	* 1.3730	* 1.4210	* 1.4210	* 1.3660	* 1.2780	* .6640	*
	* 1.3155	* 1.1776	* 1.1713	* 1.1726	* 1.2140	* 1.2842	* 2.4348	*
14	* 1.1870	* 1.3250	* 1.3210	* 1.3050	* .8770	* .6640	*	*
	* 1.3292	* 1.2111	* 1.2421	* 1.2719	* 1.8654	* 2.4345	*	*
15	* .6880	* .8270	* .7090	* .6410	* F-DEL-H			
	* 2.2367	* 1.8592	* 2.2071	* 2.4851	* M-DEL-H			

AT 75% POWER, 4 EFPD

	H	G	F	E	D	C	B	A
8	* 1.0940	* 1.4590	* 1.4010	* 1.2000	* 1.3040	* 1.2260	* 1.1870	* .6790
	* 1.7833	* 1.3581	* 1.4157	* 1.6024	* 1.4604	* 1.5451	* 1.5577	* 2.6298
9	* 1.4590	* 1.4580	* 1.2940	* 1.3130	* 1.2750	* 1.3860	* 1.3320	* .8160
	* 1.3581	* 1.3667	* 1.5634	* 1.4579	* 1.5223	* 1.3715	* 1.4258	* 2.1943
10	* 1.4010	* 1.2920	* 1.3180	* 1.1990	* 1.4110	* 1.4370	* 1.3290	* .6990
	* 1.4157	* 1.5637	* 1.4874	* 1.6508	* 1.3930	* 1.3762	* 1.4517	* 2.6336
11	* 1.2000	* 1.3150	* 1.1980	* 1.3090	* 1.3050	* 1.4340	* 1.3120	* .6310
	* 1.6024	* 1.4559	* 1.6495	* 1.5720	* 1.5984	* 1.4619	* 1.5594	* 2.9860
12	* 1.3040	* 1.2750	* 1.4100	* 1.3050	* 1.4020	* 1.3740	* .8740	*
	* 1.4604	* 1.5223	* 1.3948	* 1.5984	* 1.4742	* 1.5228	* 2.3402	*
13	* 1.2260	* 1.3850	* 1.4370	* 1.4350	* 1.3750	* 1.2820	* .6550	*
	* 1.5451	* 1.3733	* 1.3762	* 1.4615	* 1.5217	* 1.6163	* 3.0345	*
14	* 1.1870	* 1.3320	* 1.3290	* 1.3120	* .8740	* .6550	*	*
	* 1.5577	* 1.4248	* 1.4517	* 1.5594	* 2.3402	* 3.0326	*	*
15	* .6790	* .8180	* .6990	* .6310	* F-DEL-H			
	* 2.6298	* 2.1897	* 2.6337	* 2.9861	* M-DEL-H			

Catawba 1 Cycle 13 Core Operating Limits Report

CNEI-0400-24
Appendix A, Rev. 18
Page 268 of 268

TABLE 9 (CONTINUED)

F-DEL-H & M-DEL-H VALUES - POWER ESCALATION

AT 50% POWER, 4 EFPD

	H	G	F	E	D	C	B	A
8	* 1.0910	* 1.4720	* 1.4110	* 1.2000	* 1.3060	* 1.2270	* 1.1850	* .6700
	* 1.8522	* 1.4055	* 1.5155	* 1.7261	* 1.5647	* 1.6644	* 1.6883	* 2.8677
9	* 1.4720	* 1.4710	* 1.2980	* 1.3160	* 1.2810	* 1.3970	* 1.3380	* .8060
	* 1.4055	* 1.4238	* 1.6908	* 1.5696	* 1.6340	* 1.4658	* 1.5361	* 2.4105
10	* 1.4110	* 1.2970	* 1.3210	* 1.2000	* 1.4240	* 1.4520	* 1.3360	* .6900
	* 1.5155	* 1.6909	* 1.6056	* 1.7814	* 1.4928	* 1.4609	* 1.5626	* 2.9090
11	* 1.2000	* 1.3180	* 1.2000	* 1.3150	* 1.3140	* 1.4480	* 1.3190	* .6230
	* 1.7261	* 1.5686	* 1.7828	* 1.6814	* 1.7211	* 1.5474	* 1.6987	* 3.3402
12	* 1.3060	* 1.2810	* 1.4230	* 1.3140	* 1.4120	* 1.3840	* .8720	*
	* 1.5647	* 1.6363	* 1.4928	* 1.7201	* 1.5483	* 1.6144	* 2.5300	*
13	* 1.2270	* 1.3960	* 1.4530	* 1.4490	* 1.3840	* 1.2860	* .6470	*
	* 1.6644	* 1.4677	* 1.4609	* 1.5464	* 1.6144	* 1.7178	* 3.3415	*
14	* 1.1850	* 1.3380	* 1.3370	* 1.3190	* .8720	* .6470	*	*
	* 1.6883	* 1.5341	* 1.5626	* 1.6963	* 2.5272	* 3.3372	*	*
15	* .6700	* .8080	* .6900	* .6230	F-DEL-H			
	* 2.8677	* 2.4055	* 2.9126	* 3.3403	M-DEL-H			

AT 30% POWER, 4 EFPD

	H	G	F	E	D	C	B	A
8	* 1.0890	* 1.4820	* 1.4200	* 1.2000	* 1.3070	* 1.2280	* 1.1830	* .6620
	* 1.8522	* 1.4055	* 1.5155	* 1.7261	* 1.5647	* 1.6644	* 1.6883	* 2.8677
9	* 1.4820	* 1.4820	* 1.3030	* 1.3190	* 1.2860	* 1.4060	* 1.3430	* .7980
	* 1.4055	* 1.4238	* 1.6908	* 1.5696	* 1.6340	* 1.4658	* 1.5361	* 2.4105
10	* 1.4200	* 1.3020	* 1.3250	* 1.2020	* 1.4350	* 1.4650	* 1.3420	* .6810
	* 1.5155	* 1.6909	* 1.6056	* 1.7814	* 1.4928	* 1.4609	* 1.5626	* 2.9090
11	* 1.2000	* 1.3210	* 1.2020	* 1.3200	* 1.3210	* 1.4590	* 1.3240	* .6150
	* 1.7261	* 1.5686	* 1.7828	* 1.6814	* 1.7211	* 1.5474	* 1.6987	* 3.3402
12	* 1.3070	* 1.2850	* 1.4340	* 1.3210	* 1.4200	* 1.3910	* .8690	*
	* 1.5647	* 1.6363	* 1.4928	* 1.7201	* 1.5483	* 1.6144	* 2.5300	*
13	* 1.2280	* 1.4040	* 1.4650	* 1.4590	* 1.3920	* 1.2900	* .6400	*
	* 1.6644	* 1.4677	* 1.4609	* 1.5464	* 1.6144	* 1.7178	* 3.3415	*
14	* 1.1830	* 1.3430	* 1.3420	* 1.3250	* .8690	* .6400	*	*
	* 1.6883	* 1.5341	* 1.5626	* 1.6963	* 2.5272	* 3.3372	*	*
15	* .6620	* .8000	* .6820	* .6150	F-DEL-H			
	* 2.8677	* 2.4055	* 2.9126	* 3.3403	M-DEL-H			