



Home > Nuclear Reactors > Operating Reactors > Reactor Oversight Process > Plant Summaries > Braidwood 1 > Quarterly Performance Indicators

Braidwood 1 – Quarterly Performance Indicators

2Q/2017 Performance Indicators


The solid trend line represents the current reporting period.

Licensee's General Comments: none

On this page:

- Unplanned Scrams (IE01)
- Unplanned Power Changes per 7000 Critical Hours (IE03)
- Unplanned Scrams with Complications (IE04)
- Safety System Functional Failures (MS05)
- Emergency AC Power Systems (MS06)
- High Pressure Injection Systems (MS07)
- Heat Removal Systems (MS08)
- Residual Heat Removal Systems (MS09)
- Cooling Water Systems (MS10)
- Reactor Coolant System Activity (BI01)
- Reactor Coolant System Leakage (BI02)
- Drill/Exercise Performance (EP01)
- Emergency Response Organization Drill Participation (EP02)
- Alert and Notification System Reliability (EP03)
- Occupational Exposure Control Effectiveness (OR01)
- RETS/OCDM Radiological Effluent Occurrence (PR01)
- Protected Area Equipment (PP01)

Unplanned Scrams per 7000 Critical Hrs

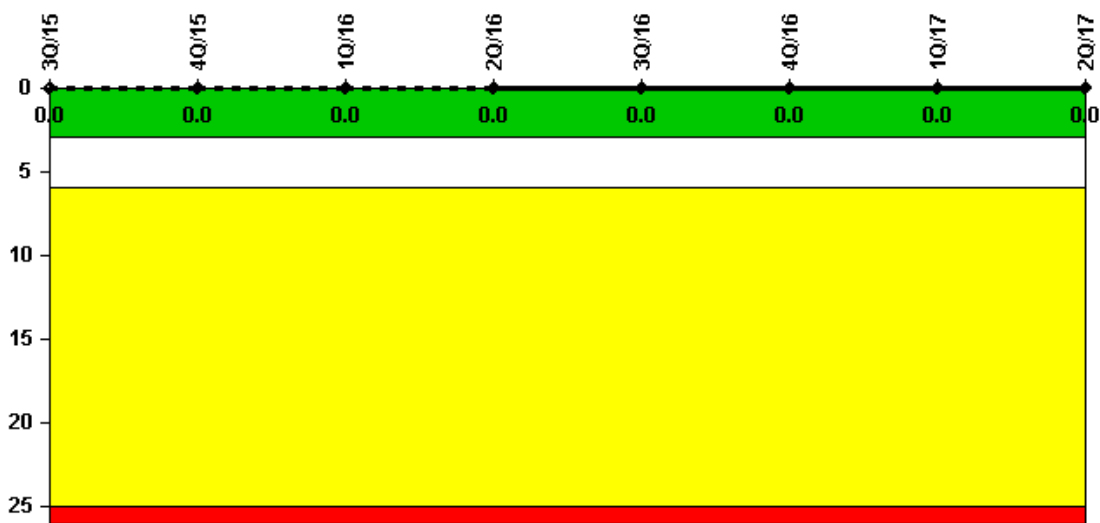

Thresholds: White > 3.0 Yellow > 6.0 Red > 25.0

Notes


Unplanned Scrams per 7000 Critical Hrs	3Q/15	4Q/15	1Q/16	2Q/16	3Q/16	4Q/16	1Q/17	2Q/17
Unplanned scrams	0	0	0	0	0	0	0	0
Critical hours	2208.0	2209.0	2183.0	2184.0	2088.0	1622.6	2159.0	2184.0

Indicator value	0	0	0	0	0	0	0	0
-----------------	---	---	---	---	---	---	---	---

TOP

Licensee Comments: none

Unplanned Power Changes per 7000 Critical Hrs

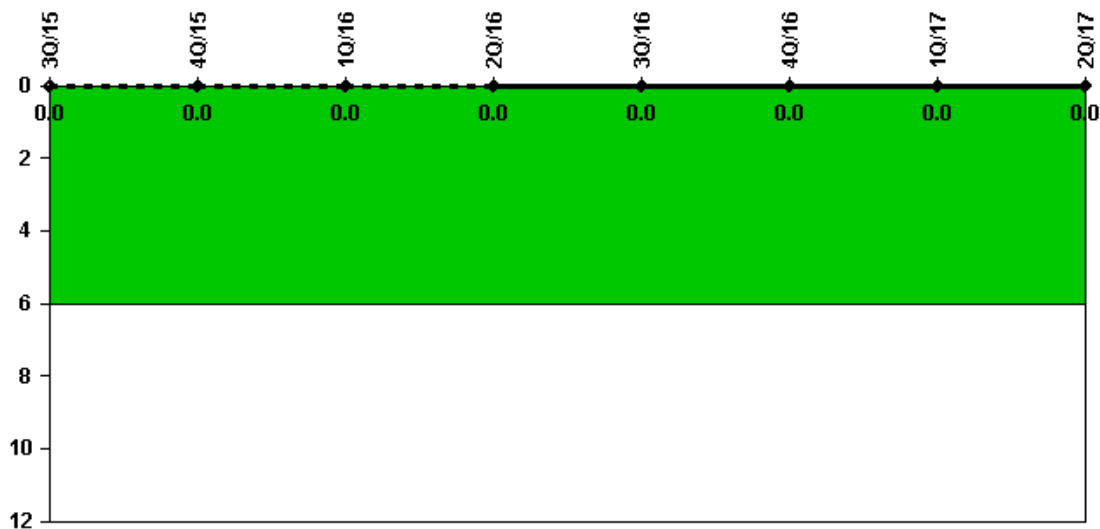

Thresholds: White > 6.0


Notes

Unplanned Power Changes per 7000 Critical Hrs	3Q/15	4Q/15	1Q/16	2Q/16	3Q/16	4Q/16	1Q/17	2Q/17
Unplanned power changes	0	0	0	0	0	0	0	0
Critical hours	2208.0	2209.0	2183.0	2184.0	2088.0	1622.6	2159.0	2184.0
Indicator value	0	0	0	0	0	0	0	0

▲ TOP

Licensee Comments: none

Unplanned Scrams with Complications

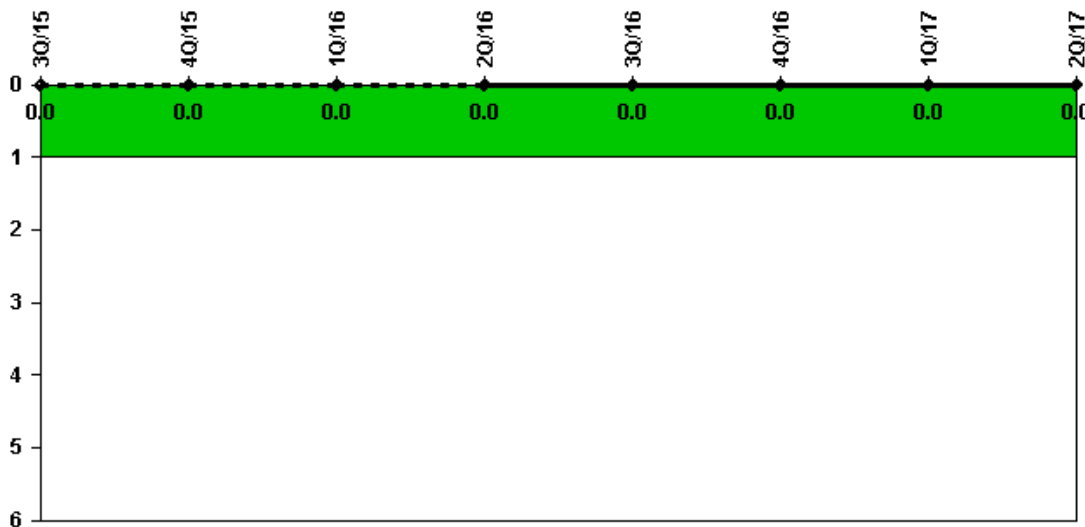

Thresholds: White > 1.0


Notes

Unplanned Scrams with Complications	3Q/15	4Q/15	1Q/16	2Q/16	3Q/16	4Q/16	1Q/17	2Q/17
Scrams with complications	0	0	0	0	0	0	0	0
Indicator value	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

▲ TOP

Licensee Comments: none

Safety System Functional Failures (PWR)

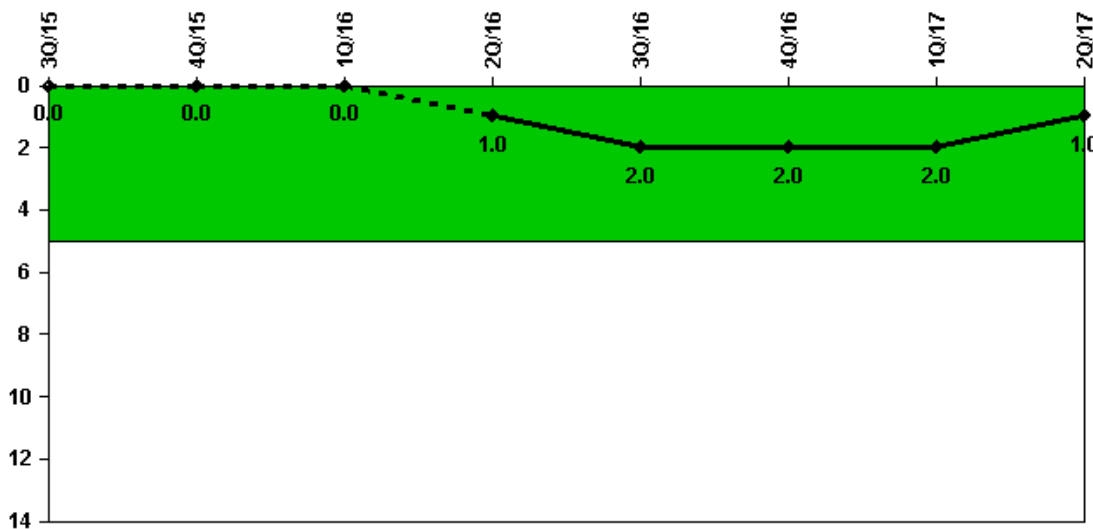

Thresholds: White > 5.0

Notes

Safety System Functional Failures (PWR) 3Q/15 4Q/15 1Q/16 2Q/16 3Q/16 4Q/16 1Q/17 2Q/17

Safety System Functional Failures 0 0 0 1 1 0 0 0

Indicator value 0 0 0 1 2 2 2 1


TOP

Licensee Comments:

3Q/16: Licensee Event Report 2016-002-00 - Inadequate Protection from Tornado Missiles Identified Due to Non-Conforming Design Conditions

2Q/16: LER 2016-001-00: Auxiliary Feedwater Diesel Intake Design Deficiency Related to Turbine Building High Energy Line Break Resulted in an Unanalyzed Condition Due to Insufficient Validation of Vendor Analysis Inputs

Mitigating Systems Performance Index, Emergency AC Power System

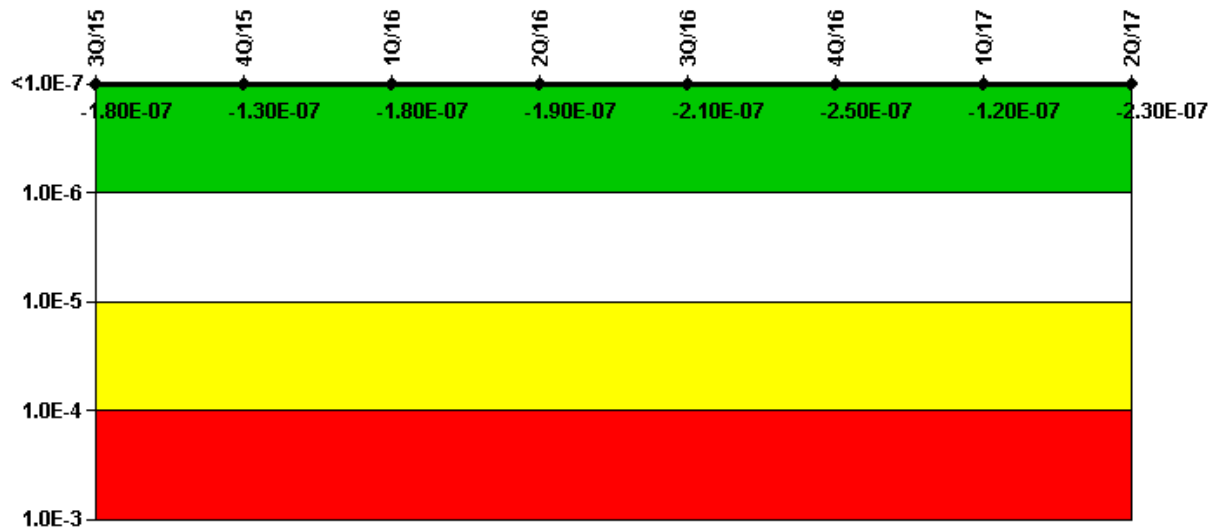

Thresholds: White > 1.00E-6 Yellow > 1.00E-5 Red > 1.00E-4

Notes

Mitigating Systems Performance Index, Emergency AC Power System


	3Q/15	4Q/15	1Q/16	2Q/16	3Q/16	4Q/16	1Q/17	2Q/17
UAI (ΔCDF)	7.24E-08	1.26E-07	6.76E-08	6.87E-08	3.50E-08	-6.38E-09	1.03E-08	7.90E-09
URI (ΔCDF)	-2.55E-07	-2.54E-07	-2.50E-07	-2.55E-07	-2.45E-07	-2.46E-07	-1.26E-07	-2.36E-07
PLE	NO	NO	NO	NO	NO	NO	NO	NO
Indicator value	-1.80E-07	-1.30E-07	-1.80E-07	-1.90E-07	-2.10E-07	-2.50E-07	-1.20E-07	-2.30E-07

▲ TOP

Licensee Comments:

2Q/17: Braidwood PRA Model Revision BB016a, approved March 31, 2017, revised Unit 1 and Unit 2 PRA inputs as part of the periodic data update process.

Mitigating Systems Performance Index, High Pressure Injection System

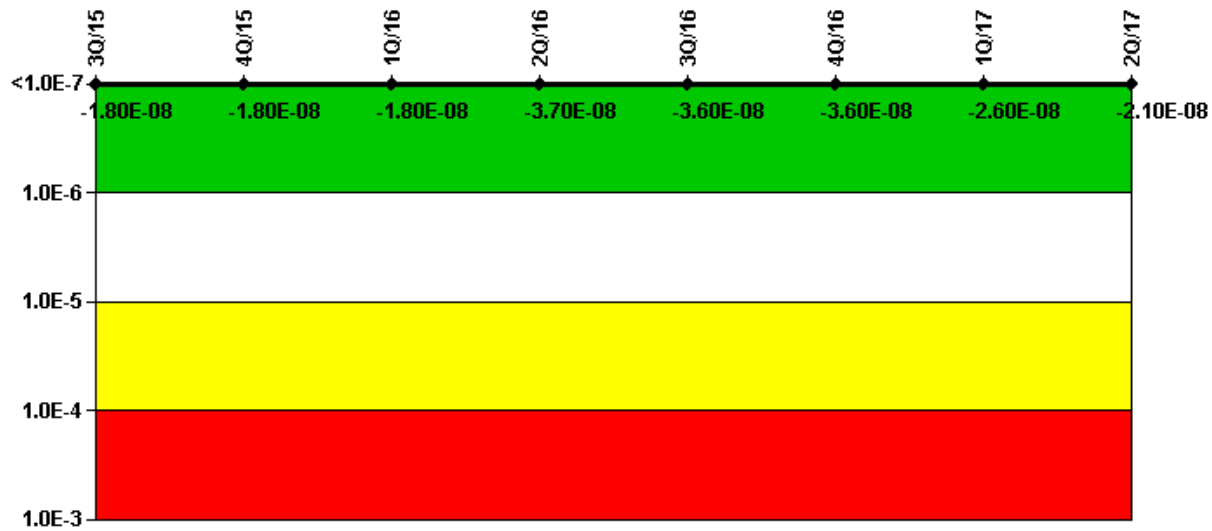

Thresholds: White > 1.00E-6 Yellow > 1.00E-5 Red > 1.00E-4

Notes

Mitigating Systems Performance Index, High Pressure Injection System


	3Q/15	4Q/15	1Q/16	2Q/16	3Q/16	4Q/16	1Q/17	2Q/17
UAI (ΔCDF)	-9.68E-09	-9.68E-09	-9.72E-09	-2.83E-08	-2.83E-08	-2.83E-08	-2.18E-08	-1.48E-08
URI (ΔCDF)	-8.40E-09	-8.39E-09	-8.35E-09	-8.36E-09	-7.55E-09	-7.84E-09	-3.88E-09	-5.76E-09
PLE	NO	NO	NO	NO	NO	NO	NO	NO
Indicator value	-1.80E-08	-1.80E-08	-1.80E-08	-3.70E-08	-3.60E-08	-3.60E-08	-2.60E-08	-2.10E-08

▲ TOP

Licensee Comments:

2Q/17: Braidwood PRA Model Revision BB016a, approved March 31, 2017, revised Unit 1 and Unit 2 PRA inputs as part of the periodic data update process.

Mitigating Systems Performance Index, Heat Removal System

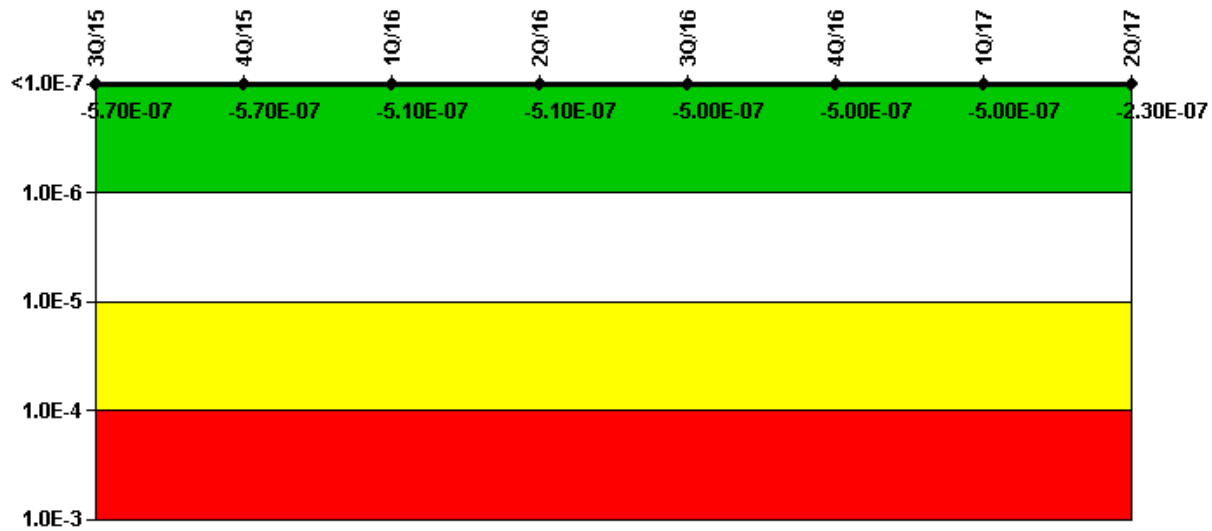

Thresholds: White > 1.00E-6 Yellow > 1.00E-5 Red > 1.00E-4

Notes

Mitigating Systems Performance Index, Heat Removal System


	3Q/15	4Q/15	1Q/16	2Q/16	3Q/16	4Q/16	1Q/17	2Q/17
UAI (Δ CDF)	-1.19E-07	-1.19E-07	-5.91E-08	-5.91E-08	-6.00E-08	-5.86E-08	-4.86E-08	-5.87E-08
URI (Δ CDF)	-4.52E-07	-4.50E-07	-4.55E-07	-4.55E-07	-4.37E-07	-4.38E-07	-4.47E-07	-1.67E-07
PLE	NO	NO	NO	NO	NO	NO	NO	NO
Indicator value	-5.70E-07	-5.70E-07	-5.10E-07	-5.10E-07	-5.00E-07	-5.00E-07	-5.00E-07	-2.30E-07

▲ TOP

Licensee Comments:

2Q/17: Braidwood PRA Model Revision BB016a, approved March 31, 2017, revised Unit 1 and Unit 2 PRA inputs as part of the periodic data update process.

Mitigating Systems Performance Index, Residual Heat Removal System

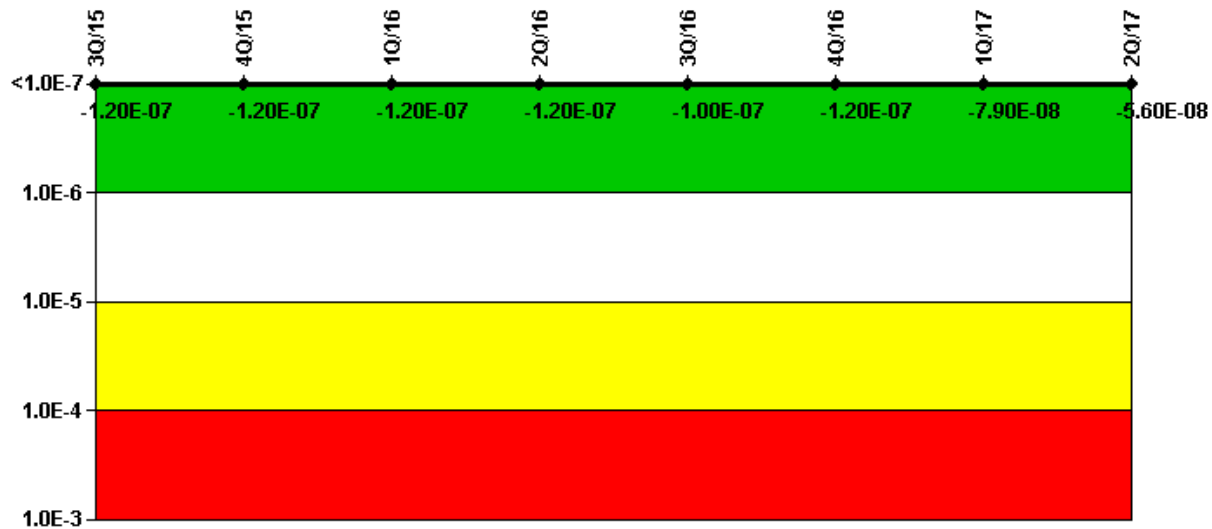

Thresholds: White > 1.00E-6 Yellow > 1.00E-5 Red > 1.00E-4

Notes

Mitigating Systems Performance Index, Residual Heat Removal System


	3Q/15	4Q/15	1Q/16	2Q/16	3Q/16	4Q/16	1Q/17	2Q/17
UAI (ΔCDF)	-3.47E-08	-3.47E-08	-3.47E-08	-3.47E-08	-3.47E-08	-3.47E-08	-2.32E-08	-1.59E-08
URI (ΔCDF)	-8.75E-08	-8.79E-08	-8.82E-08	-8.82E-08	-7.01E-08	-8.27E-08	-5.58E-08	-3.98E-08
PLE	NO	NO	NO	NO	NO	NO	NO	NO
Indicator value	-1.20E-07	-1.20E-07	-1.20E-07	-1.20E-07	-1.00E-07	-1.20E-07	-7.90E-08	-5.60E-08

▲ TOP

Licensee Comments:

2Q/17: Braidwood PRA Model Revision BB016a, approved March 31, 2017, revised Unit 1 and Unit 2 PRA inputs as part of the periodic data update process.

Mitigating Systems Performance Index, Cooling Water Systems

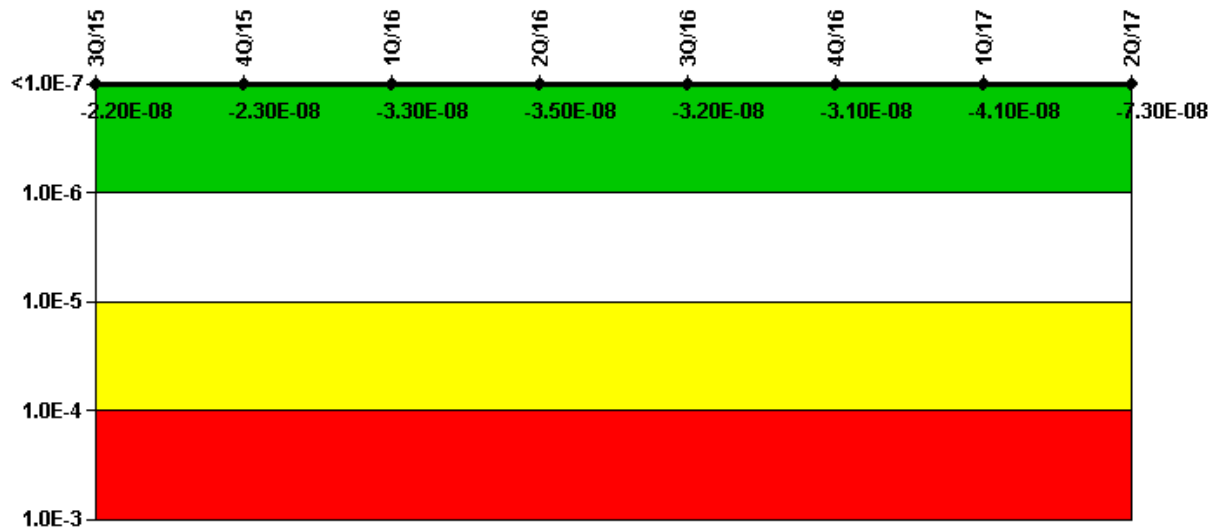

Thresholds: White > 1.00E-6 Yellow > 1.00E-5 Red > 1.00E-4

Notes

Mitigating Systems Performance Index, Cooling Water Systems

	3Q/15	4Q/15	1Q/16	2Q/16	3Q/16	4Q/16	1Q/17	2Q/17
UAI (ΔCDF)	-4.68E-09	-7.26E-09	-1.69E-08	-2.02E-08	-2.11E-08	-1.96E-08	1.45E-08	-2.76E-10
URI (ΔCDF)	-1.74E-08	-1.62E-08	-1.61E-08	-1.51E-08	-1.12E-08	-1.18E-08	-5.51E-08	-7.23E-08
PLE	NO	NO	NO	NO	NO	NO	NO	NO
Indicator value	-2.20E-08	-2.30E-08	-3.30E-08	-3.50E-08	-3.20E-08	-3.10E-08	-4.10E-08	-7.30E-08

▲ TOP


Licensee Comments:

2Q/17: Braidwood PRA Model Revision BB016a, approved March 31, 2017, revised Unit 1 and Unit 2 PRA inputs as part of the periodic data update process.

2Q/16: Changed PRA Parameter(s).

1Q/16: Changed PRA Parameter(s). 4/15/16: Braidwood ASM PRA Model Revision No. BB011b4 approved September 30, 2015, revised Byron Unit 1 and Braidwood Unit 2 PRA inputs for installation of Westinghouse Generation 3 RCP safe shutdown seal installation. These seals were installed in 4Q15 at Braidwood.

Reactor Coolant System Activity

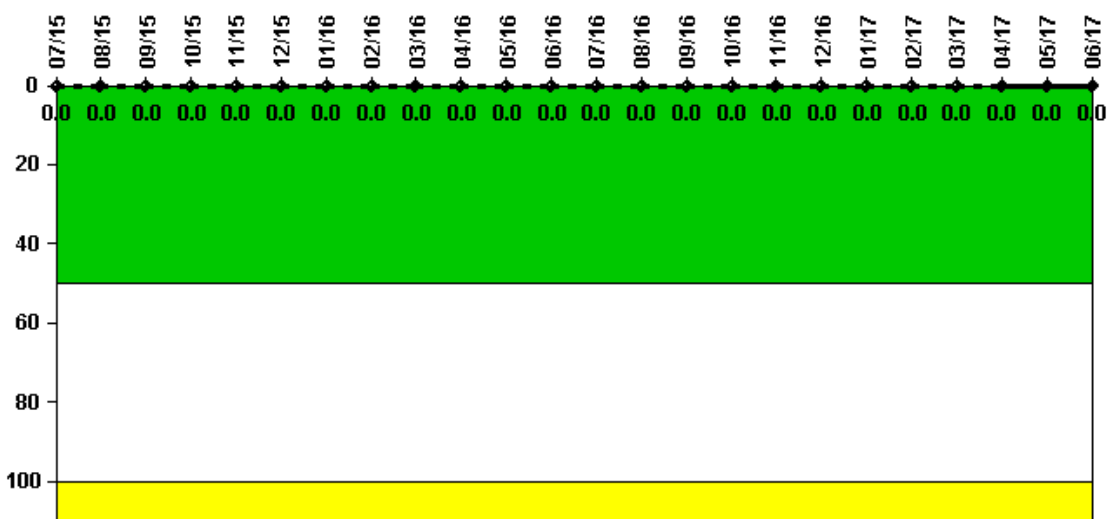

Thresholds: White > 50.0 Yellow > 100.0


Notes

Reactor Coolant System Activity	7/15	8/15	9/15	10/15	11/15	12/15	1/16	2/16	3/16	4/16	5/16	6/16
Maximum activity	0.000127	0.000144	0.000160	0.000153	0.000181	0.000174	0.000187	0.000197	0.000162	0.000204	0.000219	0.000235
Technical specification limit	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
Indicator value	0	0	0	0	0	0	0	0	0	0	0	0
Reactor Coolant System Activity	7/16	8/16	9/16	10/16	11/16	12/16	1/17	2/17	3/17	4/17	5/17	6/17
Maximum activity	0.000244	0.000265	0.000233	0.000077	0.000090	0.000088	0.000109	0.000109	0.000124	0.000127	0.000132	0.000126
Technical specification limit	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
Indicator value	0	0	0	0	0	0	0	0	0	0	0	0

TOP

Licensee Comments: none

Reactor Coolant System Leakage

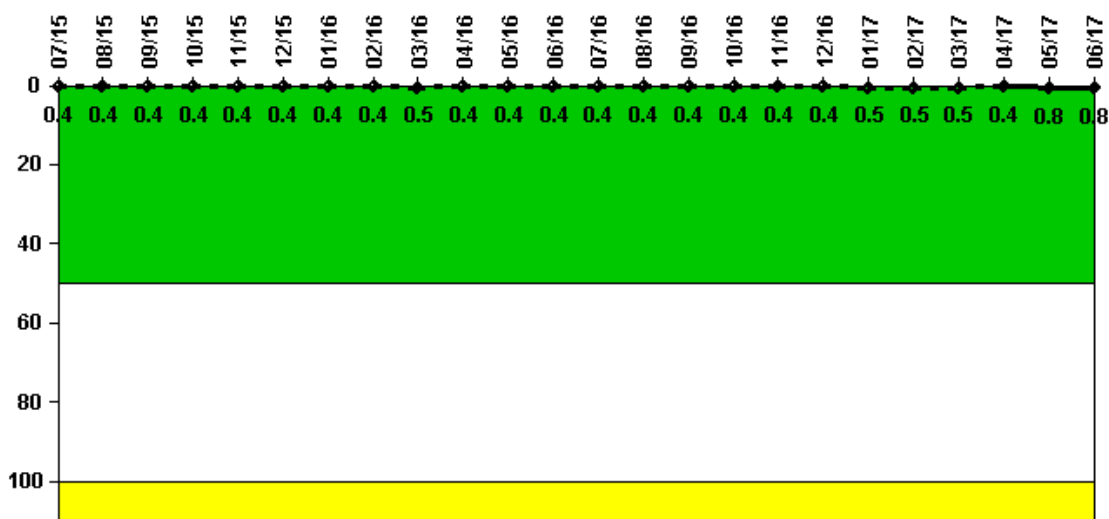

Thresholds: White > 50.0 Yellow > 100.0

Notes

Reactor Coolant System Leakage	7/15	8/15	9/15	10/15	11/15	12/15	1/16	2/16	3/16	4/16	5/16	6/16
Maximum leakage	0.035	0.036	0.042	0.035	0.042	0.038	0.036	0.039	0.045	0.038	0.037	0.038
Technical specification limit	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0


Indicator value	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.5	0.4	0.4	0.4
Reactor Coolant System Leakage	7/16	8/16	9/16	10/16	11/16	12/16	1/17	2/17	3/17	4/17	5/17	6/17
Maximum leakage	0.036	0.044	0.038	0.035	0.035	0.042	0.045	0.051	0.053	0.043	0.075	0.078
Technical specification limit	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0

Indicator value	0.4	0.4	0.4	0.4	0.4	0.4	0.5	0.5	0.5	0.4	0.8	0.8
------------------------	------------	------------	------------	------------	------------	------------	------------	------------	------------	------------	------------	------------

▲ TOP

Licensee Comments: none

Drill/Exercise Performance

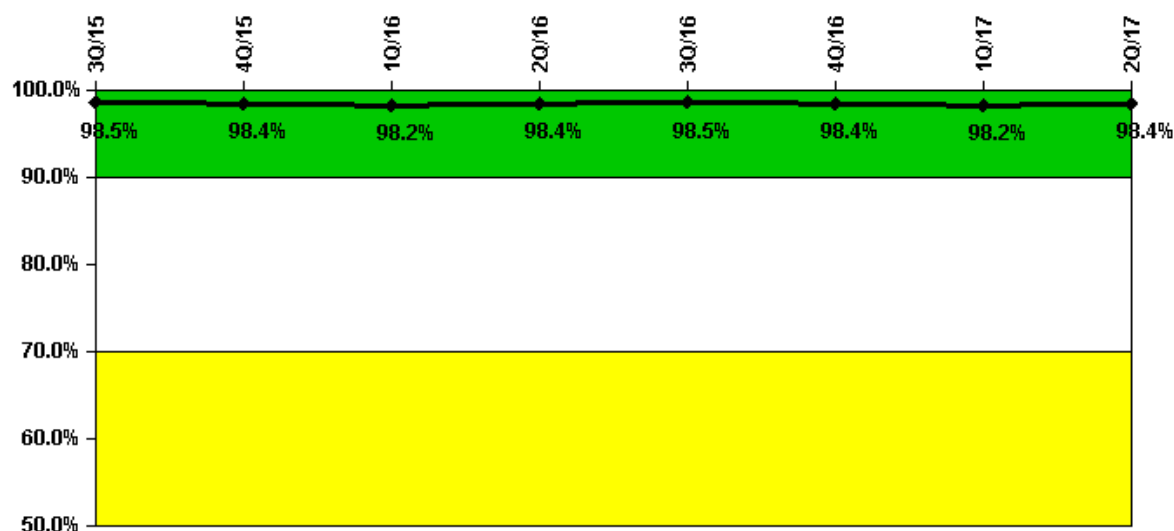

Thresholds: White < 90.0% Yellow < 70.0%

Notes

Drill/Exercise Performance	3Q/15	4Q/15	1Q/16	2Q/16	3Q/16	4Q/16	1Q/17	2Q/17
Successful opportunities	58.0	46.0	34.0	59.0	63.0	46.0	48.0	18.0
Total opportunities	58.0	46.0	35.0	60.0	66.0	46.0	49.0	18.0


Indicator value **98.5% 98.4% 98.2% 98.4% 98.5% 98.4% 98.2% 98.4%**

▲ TOP

Licensee Comments:

1Q/17: 7/6/17 - A review identified two additional successful DEP opportunities for March 2017. Data changed from 22 to 24 successful opportunities and from 23 to 25 total opportunities.

ERO Drill Participation

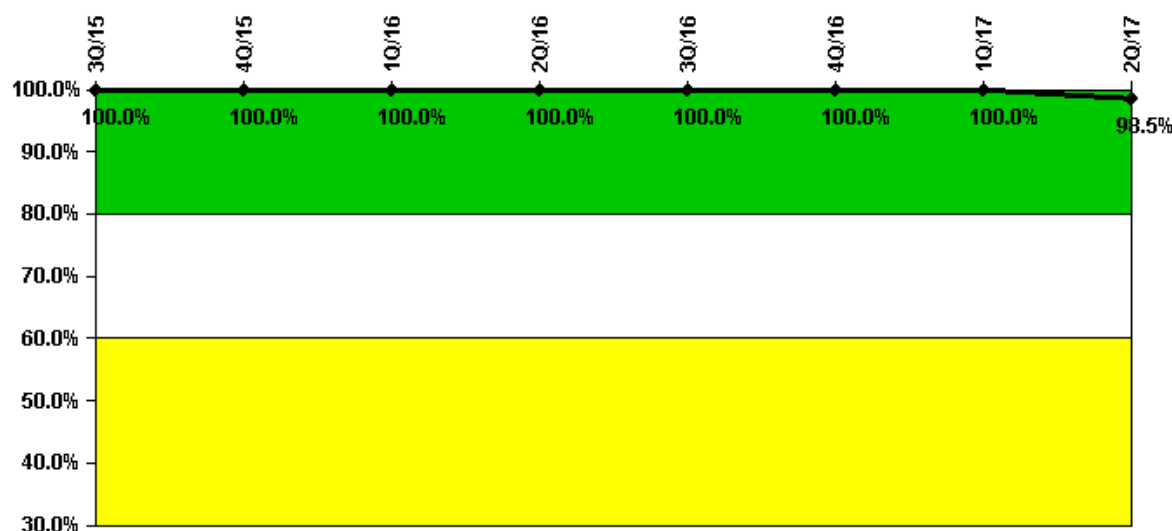

Thresholds: White < 80.0% Yellow < 60.0%

Notes


ERO Drill Participation	3Q/15	4Q/15	1Q/16	2Q/16	3Q/16	4Q/16	1Q/17	2Q/17
Participating Key personnel	67.0	64.0	67.0	66.0	64.0	66.0	71.0	67.0
Total Key personnel	67.0	64.0	67.0	66.0	64.0	66.0	71.0	68.0

Indicator value **100.0% 100.0% 100.0% 100.0% 100.0% 100.0% 100.0% 98.5%**

▲ TOP

Licensee Comments: none

Alert & Notification System

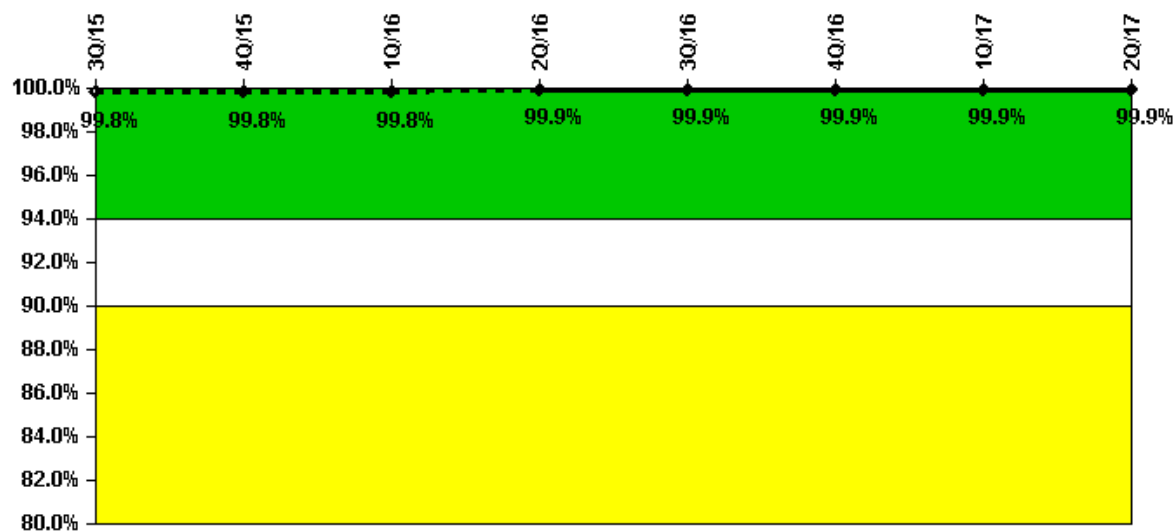

Thresholds: White < 94.0% Yellow < 90.0%

Notes


Alert & Notification System	3Q/15	4Q/15	1Q/16	2Q/16	3Q/16	4Q/16	1Q/17	2Q/17
Successful siren-tests	3112	3070	3070	3071	3064	2976	3116	3067
Total sirens-tests	3120	3072	3072	3072	3072	2976	3120	3072

Indicator value **99.8%** **99.8%** **99.8%** **99.9%** **99.9%** **99.9%** **99.9%** **99.9%**

▲ TOP

Licensee Comments: none

Occupational Exposure Control Effectiveness

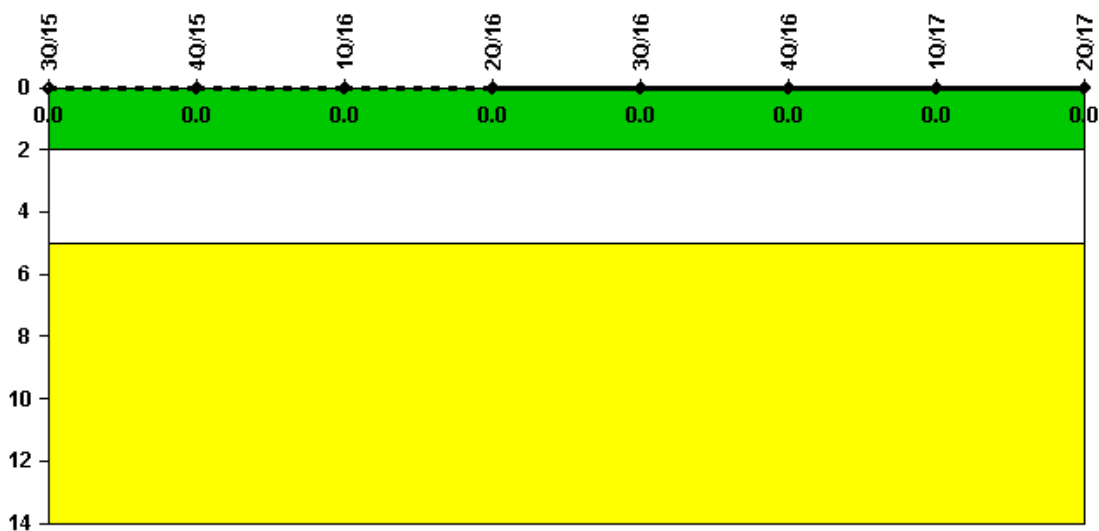

Thresholds: White > 2.0 Yellow > 5.0

Notes


Occupational Exposure Control Effectiveness 3Q/15 4Q/15 1Q/16 2Q/16 3Q/16 4Q/16 1Q/17 2Q/17

High radiation area occurrences	0	0	0	0	0	0	0	0
Very high radiation area occurrences	0	0	0	0	0	0	0	0
Unintended exposure occurrences	0	0	0	0	0	0	0	0
Indicator value	0	0	0	0	0	0	0	0

TOP

Licensee Comments: none

RETS/ODCM Radiological Effluent

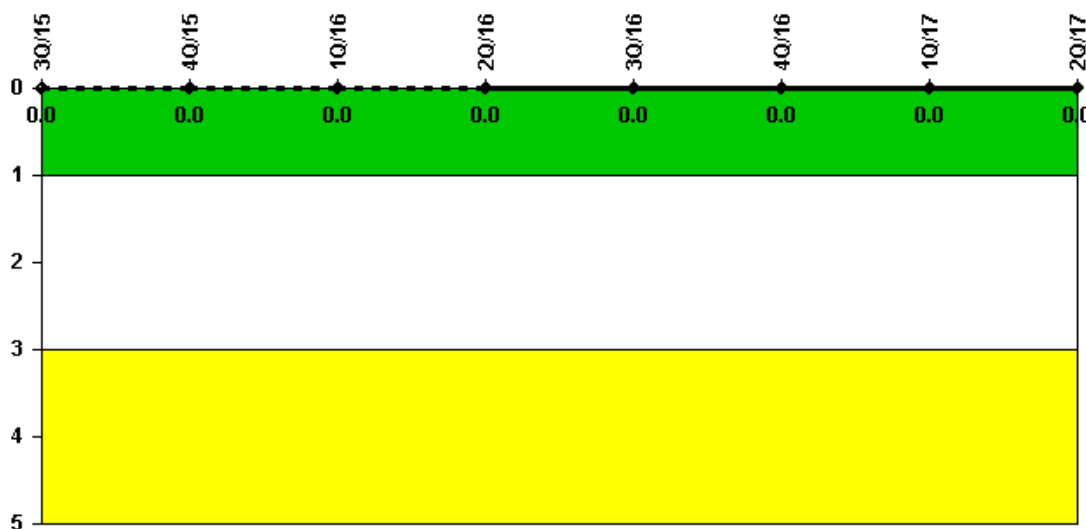

Thresholds: White > 1.0 Yellow > 3.0

Notes

RETS/ODCM Radiological Effluent 3Q/15 4Q/15 1Q/16 2Q/16 3Q/16 4Q/16 1Q/17 2Q/17

RETS/ODCM occurrences 0 0 0 0 0 0 0 0

Indicator value 0 0 0 0 0 0 0 0

▲ TOP

Licensee Comments: none

Although the Security Cornerstone is included in the Reactor Oversight Process assessment program, the Commission has decided that specific information related to findings and performance indicators pertaining to the Security Cornerstone will not be publicly available to ensure that security information is not provided to a possible adversary. Other than the fact that a finding or performance indicator is Green or Greater-Than-Green, security related information will not be displayed on the public web page.

Current data as of: July 26, 2017

Page Last Reviewed/Updated Wednesday, June 07, 2017