



Entergy Nuclear Northeast
Entergy Nuclear Operations, Inc.
James A. Fitzpatrick NPP
P.O. Box 110
Lycoming, NY 13093
Tel 315-342-3840

Joseph Pechacek
Licensing Manager – JAF NPP

October 16, 2009
JAFF-09-0117

U.S. Nuclear Regulatory Commission
ATTN: Document Control Desk
Washington, DC 20555

Subject: **Resubmitted 2008 Annual Radiological Environmental
Operating Report
James A. FitzPatrick Nuclear Power Plant
Docket No. 50-333
License No. DPR-59**

Reference: Entergy Letter, 2008 Annual Radiological Environmental
Operating Report, JAFF-09-0062, dated May 15, 2009

Dear Sir or Madam:

This letter resubmits the James A. FitzPatrick Nuclear Power Plant's Annual Radiological Environmental Operating Report for the period of January 01, 2008 through December 31, 2008. This document is being resubmitted to the Document Control Desk (DCD) in hard copy due to the pdf version of the report originally submitted on CD-ROM not meeting the DCD format criteria. This report is submitted in accordance with the Administrative Reporting Requirements of the Technical Specifications, Section 5.6.2, "Annual Radiological Environmental Operating Report", and Appendix H of the Technical Requirements Manual, "Offsite Dose Calculation Manual (ODCM)".

There are no commitments contained in this letter. Should you have any questions, please direct them to Ms. Laurie Rayle, Chemistry Superintendent, at (315) 349-6080.

Very truly yours,

A handwritten signature in black ink, appearing to read "JPechacek".

Joseph Pechacek
Licensing Manager

JP/CB/ed

Enclosure: Annual Radiological Environmental Operating Report
cc: Next Page

JE25
NPP

cc without enclosure:

Mr. Samuel J. Collins
Regional Administrator, Region 1
U.S. Nuclear Regulatory Commission
475 Allendale Road
King of Prussia, PA 19406


Mr. Gordon K. Hunegs
Office of the Resident Inspector
James A. FitzPatrick Nuclear Power Plant
U.S. Nuclear Regulatory Commission
P.O. Box 136
Lycoming, NY 13093

Mr. Bhalchandra Vaidya, Project Manager
Plant Licensing Branch I-1
Division of Operating Reactor Licensing
Office of Nuclear Reactor Regulation
U.S. Nuclear Regulatory Commission
Mail Stop O-8-C2A
Washington, DC 20555-0001

*James A. FitzPatrick
Nuclear Power Plant*

2008

**Annual Radiological
Environmental Operating Report**

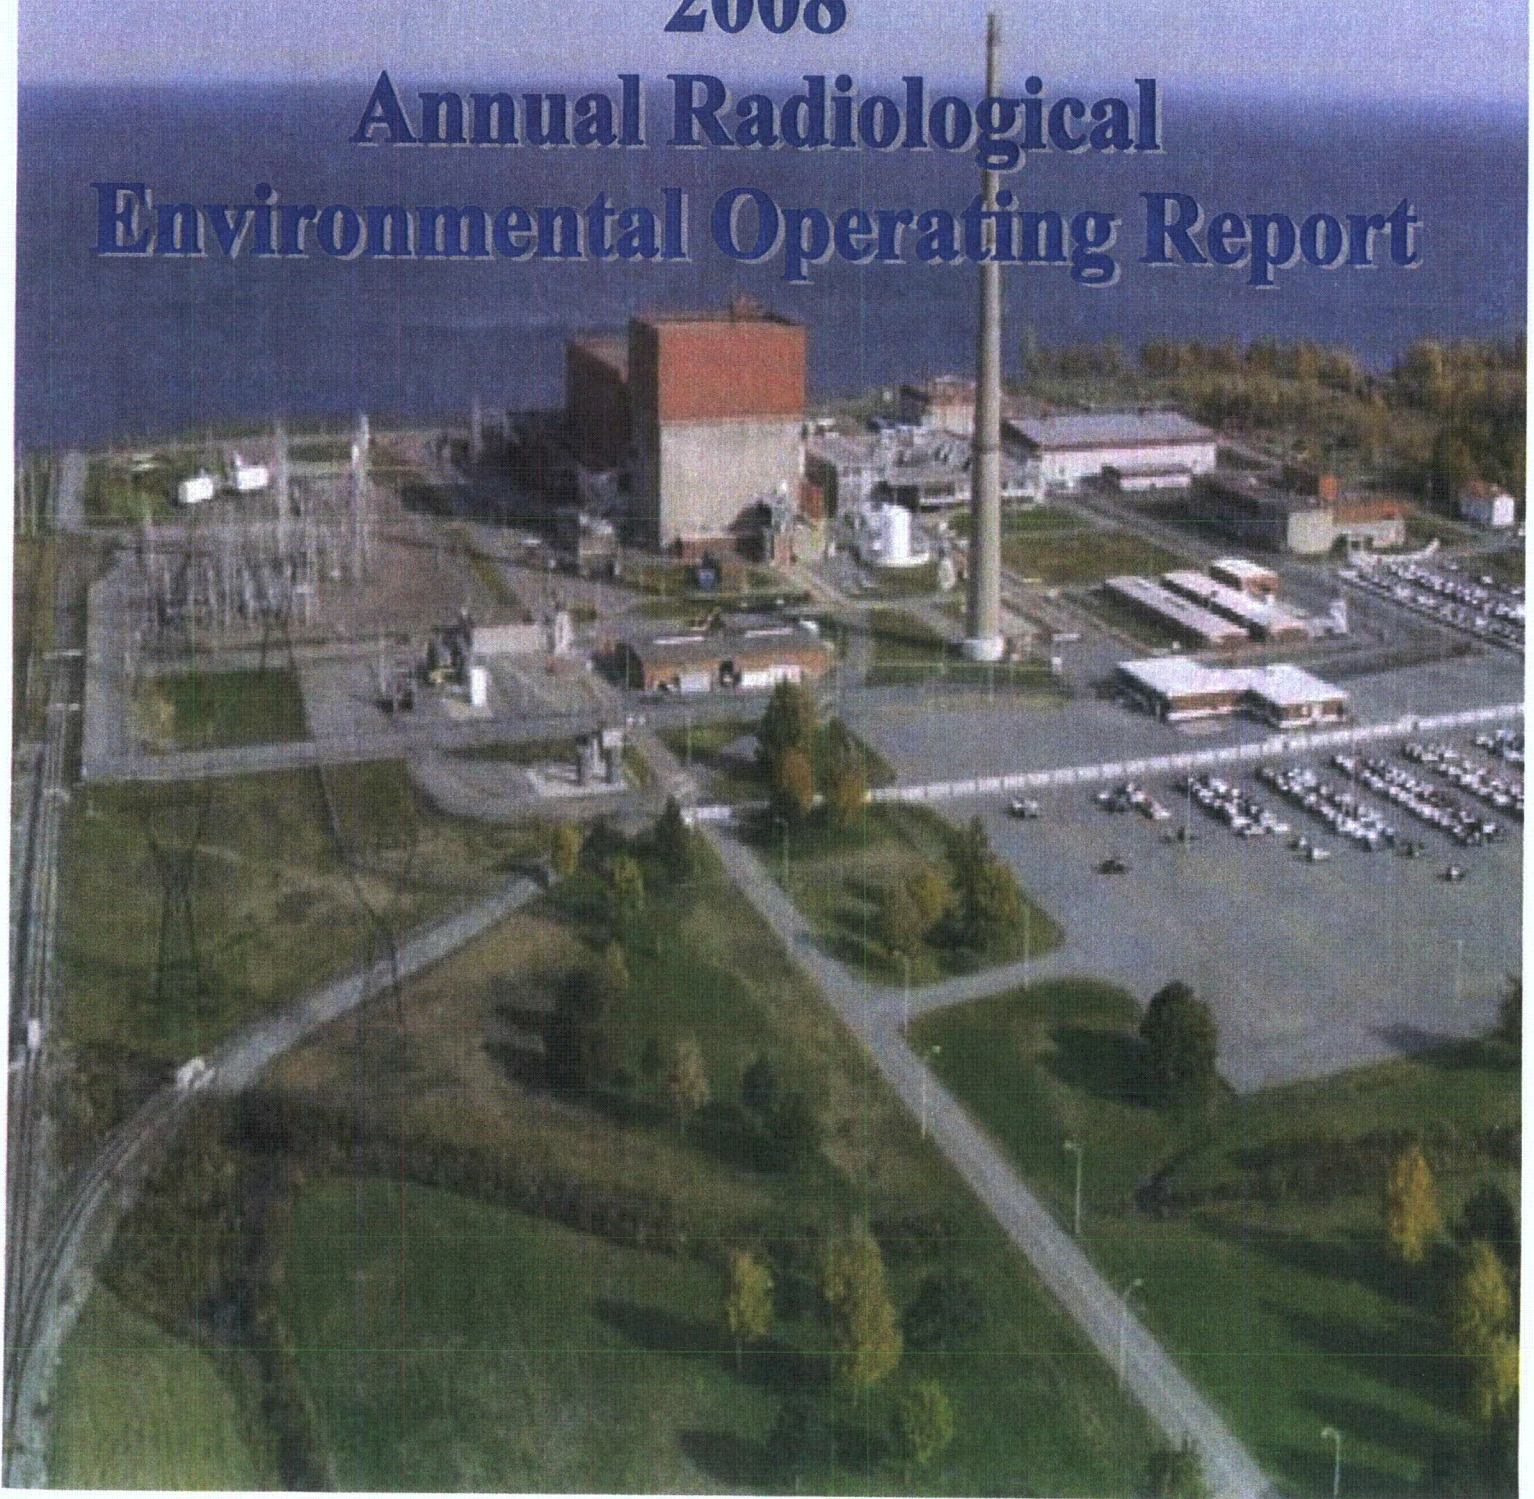

*ANNUAL RADIOLOGICAL ENVIRONMENTAL
OPERATING REPORT*

January 1, 2008- December 31, 2008

for

JAMES A. FITZPATRICK NUCLEAR POWER PLANT

ENTERGY NUCLEAR FITZPATRICK, LLC

ENTERGY NUCLEAR OPERATIONS, INC.

Facility Operating License No. DPR-59

Docket No. 50-333

TABLE OF CONTENTS

	<u>Page</u>
1.0 PURPOSE	1-1
2.0 INTRODUCTION	2-1
2.1 Program History	2-1
2.2 Site Description	2-2
2.3 Program Objectives	2-2
3.0 PROGRAM DESCRIPTION	3-1
3.1 Sample Collection Methodology	3-6
3.2 Analyses Performed	3-12
3.3 Sample Locations	3-12
3.4 Land Use Census	3-26
3.5 Changes to the REMP Program	3-27
3.6 Deviation and Exceptions to the Program	3-28
3.7 Statistical Methodology	3-29
3.8 Compliance with Required Lower Limits of Detection (LLD)	3-32
3.9 Regulatory Limits	3-34
4.0 SAMPLE SUMMARY TABLES IN BRANCH TECHNICAL POSITION FORMAT	4-1
5.0 DATA EVALUATION AND DISCUSSION	5-1
5.1 Aquatic Program	5-5
5.2 Terrestrial Program	5-13
5.3 Conclusion	5-32
5.4 References	5-34
6.0 REPORT PERIOD ANALYTICAL RESULTS TABLES	6-1
7.0 HISTORICAL DATA TABLES	7-1
8.0 QUALITY ASSURANCE/QUALITY CONTROL PROGRAM	8-1
9.0 GRAPHICAL PRESENTATIONS	9-1

LIST OF TABLES

	<u>Page</u>
Table 3.0-1	Required Sample Collection and Analysis.....3-2
Table 3.3-1	Environmental Sample Locations..... 3-14
Table 3.8-1	Required Detection Capabilities For Environmental Sample Analysis Lower Limit of Detection (LLD) 3-33
Table 4.0-1	Radiological Environmental Monitoring Program Annual Summary4-2
Table 6-1	Concentrations of Gamma Emitters in Shoreline Sediment Samples.....6-2
Table 6-2	Concentrations of Gamma Emitters in Fish Samples6-3
Table 6-3	Concentrations of Tritium in Surface Water Samples6-6
Table 6-4	Concentrations of Gamma Emitters in Surface Water Samples.....6-7
Table 6-5	Environmental Airborne Particulate Samples – Offsite Sample Locations..... 6-12
Table 6-6	Environmental Airborne Particulate Samples – Onsite Sample Locations 6-14
Table 6-7	Environmental Charcoal Cartridge Samples – Offsite Sample Locations..... 6-16
Table 6-8	Environmental Charcoal Cartridge Samples – Onsite Sample Locations 6-18
Table 6-9	Concentrations of Gamma Emitters in Quarterly Composites 6-20
Table 6-10	Direct Radiation Measurement Results..... 6-24
Table 6-11	Concentrations of Iodine-131 and Gamma Emitters in Milk 6-28
Table 6-12	Concentrations of Gamma Emitters in Food Products 6-31
Table 6-13	Milk Animal Census 6-32
Table 6-14	Residence Census..... 6-33
Table 7-1, 2	Historical Environmental Sample Data, Shoreline Sediment.....7-2
Table 7-3, 4	Historical Environmental Sample Data, Fish.....7-4
Table 7-5, 6	Historical Environmental Sample Data, Surface Water7-6
Table 7-7, 8	Historical Environmental Sample Data, Surface Water Tritium.....7-8
Table 7-9, 10	Historical Environmental Sample Data, Air Particulate Gross Beta..... 7-10
Table 7-11, 12	Historical Environmental Sample Data, Air Particulates 7-12
Table 7-13, 14	Historical Environmental Sample Data, Air Radioiodine 7-14
Table 7-15 - 20	Historical Environmental Sample Data, Environmental TLD 7-16
Table 7-21, 22	Historical Environmental Sample Data, Milk..... 7-22
Table 7-19, 20	Historical Environmental Sample Data, Food Products..... 7-24
Table 8-1	Interlaboratory Intercomparison Program.....8-5

LIST OF FIGURES

	<u>Page</u>
Figure 3.3-1 New York State Map.....	3-19
Figure 3.3-2 Off-Site Environmental Station and TLD Locations Map	3-20
Figure 3.3-3 Onsite Environmental Station and TLD Locations Map	3-21
Figure 3.3-4 Milk and Surface Water Sample Locations Map	3-22
Figure 3.3-5 Nearest Residence, Food Product, Fish and Shoreline Sediment Sample Locations Map	3-23
Figure 3.3-6 Nearest Residence Locations Map	3-24
Figure 3.3-7 On-Site Ground Water Monitoring Wells Map	3-25
Figure 9.1 Graph - Fish (Cs-137)	9-2
Figure 9.2 Graph - Surface Water - Tritium	9-3
Figure 9.3 Graph - Air Particulate Filter Gross Beta, Annual.....	9-4
Figure 9.4 Graph - Air Particulate Filter Gross Beta, Weeks 1-26	9-5
Figure 9.5 Graph - Air Particulate Filter Gross Beta, Weeks 27-52	9-6
Figure 9.6 Graph - Air Particulate Filter Composite Co-60	9-7
Figure 9.7 Graph - Air Particulate Filter Composite Cs-137	9-8
Figure 9.8 Graph - Air Charcoal I-131	9-9
Figure 9.9 Graph - Milk Cs-137	9-10
Figure 9.10 Graph - Milk I-131	9-11
Figure 9.11 Graph - TLD Data	9-12

1.0 PURPOSE

The Annual Radiological Environmental Operating Report is published in accordance with the James A. FitzPatrick Nuclear Power Plant Offsite Dose Calculation Manual (ODCM), Part I, Section 6.1. The ODCM requires that the results from the annual Radiological Environmental Monitoring Program (REMP) be provided to the Nuclear Regulatory Commission by May 15th of each year.

This report describes the Radiological Environmental Monitoring Program (REMP) program, the implementation of the program, and the results obtained as required by the Offsite Dose Calculation Manual (ODCM). The report also contains the analytical results tables, data evaluation, dose assessment, and data trends for each environmental sample media. Also included are results of the land use census, historical data, and the Environmental Laboratory's performance in the Quality Assurance Intercomparison.

The REMP is a comprehensive surveillance program, which is implemented to assess the impact of site operations on the environment and compliance with 10CFR20, 40CFR190 and 10CFR72. Samples are collected from the aquatic and terrestrial pathways applicable to the site. The aquatic pathways include Lake Ontario fish, surface waters and lakeshore sediment. The terrestrial pathways include airborne particulate and radioiodine, milk, food products and direct radiation.

During 2008 there were 1895 analyses performed on environmental media collected as part of the REMP. These results demonstrated that there is no significant or measurable radiological impact from the operation of the James A. FitzPatrick Nuclear Power Plant. The 2008 results for all pathways sampled are consistent with the previous five-year historical results and exhibited no adverse trends.

In summary, the analytical results from the 2008 Radiological Environmental Monitoring Program demonstrate that the routine operation at the James A. FitzPatrick site had no significant or measurable radiological impact on the environment. The program continues to demonstrate that the dose to a member of the public, as a result of the operation of the James A. FitzPatrick Nuclear Power Plant, remains significantly below the federally required dose limits specified in 10CFR20, 40CFR190 and 10CFR72.

2.0 INTRODUCTION

The James A. FitzPatrick Nuclear Power Plant is owned and operated by Entergy Nuclear FitzPatrick, LLC (ENF), Entergy Nuclear Operations, Inc. (ENO). This report is submitted in accordance with Offsite Dose Calculation Manual, Part I, Section 6.1. This report covers the calendar year 2008.

2.1 PROGRAM HISTORY

Environmental monitoring at the Nine Mile Point site has been ongoing since 1964. The program includes five years of preoperational data, which was conducted prior to any reactor operations. In 1968, the Niagara Mohawk Power Company began the required preoperational environmental site testing program. This pre-operational data serves as a reference point to compare later data obtained during reactor operation. In 1969, the Nine Mile Point Unit 1 reactor, a 615 megawatt Boiling Water Reactor (BWR) began full power operation. In 1975, the James A. FitzPatrick Nuclear Power Plant, owned and operated at that time by the New York Power Authority, began full power operation. The FitzPatrick plant, an 892 megawatt (rated) BWR, occupies the east sector of the Nine Mile Point site, approximately 0.57 miles east of Nine Mile Point Unit 1. In 1988, the Nine Mile Point Unit 2 reactor, also owned and operated by Niagara Mohawk, began full power operation. This 1207 megawatt BWR is located between the Nine Mile Point Unit 1 and FitzPatrick sites.

In 1985, the individual Plant Effluent Technical Specifications were standardized to the generic Radiological Effluent Technical Specifications, much of which was common to the two reactors, and subsequently Nine Mile Point Unit 2. Subsequent Technical Specification amendments relocated the REMP requirements to the ODCM for all three plants. Data generated by the Radiological Environmental Monitoring Program is shared, but each utility reviews and publishes their own annual report. On November 21, 2000 the ownership and operation of the James A. FitzPatrick Nuclear Power Plant was transferred from the New York Power Authority to Entergy Nuclear FitzPatrick, LLC and Entergy Nuclear Operations, Inc. The Facility Operating License No. DPR-59 and Docket No. 50-333 remained the same. On November 7, 2001, the ownership of the Nine Mile Point Unit I and II facilities was transferred to Constellation Nuclear. These facilities are operated by Nine Mile Point Nuclear Station, LLC.

In summary, three Boiling Water Reactors, which together generate 2714 megawatts, have operated collectively at the Nine Mile Point site since 1988. A large database of environmental results from the exposure pathways have been collected and analyzed to evaluate the potential impact from reactor operations.

2.2 SITE DESCRIPTION

The Nine Mile Point site is located on the southeast shore of Lake Ontario in the town of Scriba, approximately 6.2 miles northeast of the city of Oswego. The nearest metropolitan area is located approximately 36 miles southeast of the site. The James A. FitzPatrick Nuclear Power Plant and support buildings occupy a small shoreline portion of the 702 acre Entergy site, which is partially wooded. The land, soil of glacier deposits, rises gently from the lake in all directions. Oswego County is a rural environment, with about 15% of the land devoted to agriculture.

2.3 PROGRAM OBJECTIVES

The objectives of the Radiological Environmental Monitoring Program are to:

1. Measure and evaluate the effects of plant operation on the environs and to verify the effectiveness of the controls on radioactive material sources.
2. Monitor natural radiation levels in the environs of the James A. FitzPatrick Nuclear Power Plant site.
3. Demonstrate compliance with the requirements of applicable federal regulatory agencies, including Technical Specifications and the Offsite Dose Calculation Manual.

3.0 PROGRAM DESCRIPTION

To achieve the objectives listed in Section 2.3, an extensive sampling and analysis program is conducted every year. The James A. FitzPatrick Nuclear Power Plant (JAFNPP) Radiological Environmental Monitoring Program (REMP) consists of sampling and analysis of various media that include:

- Air
- Fish
- Food Products
- Milk
- Shoreline Sediment
- Surface Waters
- Ground Waters

In addition, direct radiation measurements are performed using thermoluminescent dosimeters (TLDs). These sampling programs are outlined in Table 3.0-1. The JAF REMP sampling locations are selected and verified by an annual Land Use Census. The accuracy and precision of the program is assured by participation in an Interlaboratory Comparison Quality Assurance Program (ICQAP).

Sample collections for the radiological program are accomplished by a dedicated site environmental staff from both the Nine Mile Point Nuclear Stations (NMPNS) and James A. FitzPatrick Nuclear Power Plant (JAFNPP). The site staff is assisted by a contracted environmental engineering company, EA Engineering, Science and Technology, Inc. (EA).

**TABLE 3.0-1
REQUIRED SAMPLE COLLECTION AND ANALYSIS**

Exposure Pathway and/or Sample	Number of Samples ^(a) and Locations	Sampling and Collection Frequency ^(a)	Type and Frequency of Analysis
<u>AIRBORNE</u>			
Radioiodine And Particulates	<p>Samples from 5 locations:</p> <ul style="list-style-type: none"> a. 3 Samples from offsite locations in different sectors of the highest calculated site average D/Q (based on all licensed site reactors.). b. 1 sample from the vicinity of a community having the highest calculated site average D/Q (based on all licensed site reactors). c. 1 sample from a control location 9 to 20 miles distant and in the least prevalent wind direction^(d). 	Continuous sample operation with sample collection weekly, or as required by dust loading, whichever is more frequent.	<p>Radioiodine Canisters: Analyze weekly for I-131.</p> <p>Particulate Samples: Gross beta radioactivity following filter change^(b) composite (by location for gamma isotopic quarterly (as a minimum).</p>
Direct Radiation ^(e)	<p>32 stations with two or more dosimeters placed as follows:</p> <ul style="list-style-type: none"> a. An inner ring of stations in the general area of the site boundary. b. An outer ring, in the 4 to 5 mile range from the site, with a station in each of the land based sectors. There are 16 land based sectors in the inner ring, and 8 land based sectors in the outer ring. c. The balance of the stations (8) are placed in special interest areas such as population centers, nearby residences, schools, and in 2 or 3 areas to serve as control stations. 	Quarterly	Gamma dose monthly or quarterly.

TABLE 3.0-1 (Continued)
REQUIRED SAMPLE COLLECTION AND ANALYSIS

Exposure Pathway and/or Sample	Number of Samples ^(a) and Locations	Sampling and Collection Frequency ^(a)	Type and Frequency of Analysis
<u>WATERBORNE</u>			
Surface ^(f)	a. 1 sample upstream. ^(d)	Composite sample over a one month period ^(g) .	Gamma isotopic analysis monthly. Composite for Tritium analysis quarterly ^(c) .
	b. 1 sample from the site's most downstream cooling water intake.		
Sediment from Shoreline	1 sample from a downstream area with existing or potential recreational value.	Twice per year.	Gamma isotopic analysis semiannually ^(c) .
<u>INGESTION</u>			
Milk	a. Samples from milk animals in 3 locations within 3.5 miles distant having the highest calculated site average D/Q. If there are none, then 1 sample from milk animals in each of 3 areas 3.5 to 5.0 miles distant having the highest calculated site average D/Q (based on all licensed site reactors) ^(h) .	Twice per month, April through December (samples will be collected in January through March if I-131 is detected in November and December of the preceding year).	Gamma isotopic and I-131 analysis twice per month when milch animals are on pasture (April through December); monthly (January through March), if required ^(c) .
	b. 1 sample from milk animals at a control location (9 to 20 miles distant and in a less prevalent wind direction) ^(d) .		

TABLE 3.0-1 (Continued)
REQUIRED SAMPLE COLLECTION AND ANALYSIS

Exposure Pathway and/or Sample	Number of Samples ^(a) and Locations	Sampling and Collection Frequency ^(a)	Type and Frequency of Analysis
<u>FISH</u>			
	a. 1 sample of each of 2 commercially or recreationally important species in the vicinity of a site discharge point.	Twice per year.	Gamma isotopic ^(c) analysis of edible portions.
	b. 1 sample of each of 2 species (same as in a. above or of a species with similar feeding habits) from an area at least 5 miles distant from the site ^(d) .		
<u>FOOD PRODUCTS</u>			
	a. In lieu of the garden census as specified in Part 1, Section 5.2, samples of at least 3 different kinds of broad leaf vegetation (such as vegetables) grown nearest each of two different offsite locations of highest predicted site average D/Q (based on all licensed site reactors).	Once during harvest season.	Gamma isotopic ^(c) analysis of edible portions. (Isotopic to include I-131).
	One (1) sample of each of the similar broad leaf vegetation grown at least 9.3 miles distant in a least prevalent wind direction sector ^(d) .		

NOTES FOR TABLE 3.0-1

- (a) It is recognized that, at times, it may not be possible or practical to obtain samples of the media of choice at the most desired location or time. In these instances, suitable alternative media and locations may be chosen for the particular pathway in question. Actual locations (distance and directions) from the site shall be provided in the Annual Radiological Environmental Operating Report. Calculated site averaged D/Q values and meteorological parameters are based on historical data (specified in the ODCM) for all licensed site reactors.
- (b) Particulate sample filters should be analyzed for gross beta 24 hours or more after sampling to allow for radon and thoron daughter decay. If gross beta activity in air is greater than 10 times a historical yearly mean of control samples, gamma isotopic analysis shall be performed on the individual samples.
- (c) Gamma isotopic analysis means the identification and quantification of gamma emitting radionuclides that may be attributable to the effluents from the plant.
- (d) The purpose of these samples is to obtain background information. If it is not practical to establish control locations in accordance with the distance and wind direction criteria, other sites which provide valid background data may be substituted.
- (e) One or more instruments, such as a pressurized ion chamber, for measuring and recording dose rate continuously may be used in place of, or in addition to, integrating dosimeters. For the purpose of this table, a thermoluminescent dosimeter may be considered to be one phosphor and two or more phosphors in a pocket may be considered as two or more dosimeters. Film badges shall not be used for measuring direct radiation.
- (f) The "upstream sample" shall be taken at a distance beyond significant influence of the discharge. The "downstream sample" shall be taken in an area beyond, but near, the mixing zone, if practical.
- (g) Composite samples should be collected with equipment (or equivalent) which is capable of collecting an aliquot at time intervals which are very short (e.g., hourly) relative to the compositing period (e.g., monthly) in order to assure that a representative sample is obtained.
- (h) A milk sampling location as required in Table 3.0-1 is defined as a location having at least 10 milking cows present at a designated milk sample location. It has been found from past experience, and as a result of conferring with local farmers, that a minimum of 10 milking cows is necessary to guarantee an adequate supply of milk twice per month for analytical purposes. Locations with less than 10 milking cows are usually utilized for breeding purposes, which eliminates a stable supply of milk for samples as a result of suckling calves and periods when the adult animals are dry. In the event that 3 milk sample locations cannot meet the requirement for 10 milking cows, then a sample location having less than 10 milking cows can be used if an adequate supply of milk can reasonably and reliably be obtained based on communications with the farmer.

3.1 SAMPLE COLLECTION METHODOLOGY

3.1.1 SHORELINE SEDIMENTS

Shoreline sediment is collected at one area of existing or potential recreational value. One sample is also collected from a location beyond the influence of the site. Samples are collected as surface scrapings to a depth of approximately one inch. The samples are placed in plastic bags, sealed and shipped to the lab for analysis. Sediment samples are analyzed for gamma emitting radionuclides.

Shoreline sediment sample locations are shown in Section 3.3, Figure 3.3-5.

3.1.2 FISH

Samples of available fish species that are commercially or recreationally important to Lake Ontario; such as Lake Trout, Salmon, Walleye and Smallmouth Bass, are collected twice per year, once in the spring and again in the fall. Indicator samples are collected from a combination of the two onsite sample transects located offshore from the site. One set of control samples are collected at an offsite sample transect located offshore 8-10 miles west of the site. Available species are selected using the following guidelines:

1. A minimum of two species that are commercially or recreationally important are to be collected from each sample location. Samples selected are limited to edible and/or sport species when available.
2. Samples are composed of the edible portion only.

Selected fish samples are frozen immediately after collection and segregated by species and location. Samples are shipped frozen in insulated containers for analysis. Edible portions of each sample are analyzed for gamma emitting radionuclides.

Fish collection locations are shown in Section 3.3, Figure 3.3-5.

3.1.3 SURFACE WATER

Surface water samples are taken from the respective inlet canals of the James A. Fitzpatrick Nuclear Power Plant (JAFNPP) and NRG's Oswego Steam Station. The JAFNPP facility draws water from Lake Ontario on a continuous basis. This is used for the "downstream" or indicator sampling point for the Nine Mile Point site. The Oswego Steam Station inlet canal removes water from Lake Ontario at a point approximately 7.6 miles west of the site. This "upstream" location is considered a control location because of the distance from the site, as well as the result of the lake current patterns and current patterns from the Oswego River located nearby.

Samples from the JAFNPP facility are composited from automatic sampling equipment which discharges into a compositing tank or bottles. Samples are collected monthly from the compositor and analyzed for gamma emitters. Samples from the Oswego Steam Station are also obtained using automatic sampling equipment and collected in a holding tank. Representative samples from this location are obtained weekly and are composited to form a monthly composite sample. The monthly samples are analyzed for gamma emitting radionuclides.

A portion of the monthly sample from each of the locations is saved and composited to form quarterly composite samples, which are analyzed for tritium.

In addition to the sample results for the JAFNPP and Oswego Steam Station collection sites, data is presented for the Nine Mile Point Unit 1 and Unit 2 facility inlet canal samples and from the City of Oswego drinking water supply. The latter three locations are not required by the ODCM. These locations are optional sample points, which are collected and analyzed to enhance the surface water sampling program. Monthly composite samples from these three locations are analyzed for gamma emitting nuclides, and quarterly composite samples are analyzed for tritium.

Surface water sample locations are shown in Section 3.3 on Figure 3.3-4.

3.1.4 AIR PARTICULATE / IODINE

The air sampling stations required by the ODCM are located in the general area of the site boundary. The sampling stations are sited within a distance of 0.2 miles of the site boundary in sectors with the highest calculated deposition factor (D/Q) based on historical meteorological data. These stations (R-1, R-2, and R-3) are located in the E, ESE, and SE sectors as measured from the center of the Nine Mile Point Nuclear Station Unit 2 Reactor Building. The ODCM also require that a fourth air sampling station be located in the vicinity of a year-round community. This station is located in the SE sector at a distance of 1.8 miles and is designated as Station R-4. A fifth station required by the ODCM is a control location designated as Station R-5. Station R-5 is located 16.2 miles from the site in the NE meteorological sector.

In addition to the five ODCM required locations, there are ten additional sampling stations. Six of these sampling stations are located within the site boundary and are designated as Onsite Stations D1, G, H, I, J, and K. These locations are within the site boundary of the NMPNS and JAFNPP. One air sampling station is located offsite in the southwest sector in the vicinity of the City of Oswego and is designated as Station G Offsite. Three remaining air sampling stations are located in the ESE, SSE, and SSW sectors and range in distance from 7.1 to 9.0 miles. These are designated as Offsite Stations D2, E and F respectively.

Each station collects airborne particulates using glass fiber filters (47 millimeter diameter) and radioiodine using charcoal cartridges (2x1 inch). The samplers run continuously and the charcoal cartridges and particulate filters are changed on a weekly basis. Sample volume is determined by use of calibrated gas flow meters located at the sample discharge. Gross beta analysis is performed on each particulate filter. Charcoal cartridges are analyzed for radioiodine using gamma spectral analysis. The particulate filters are composited quarterly by location and analyzed for gamma emitting radionuclides.

Air sampling station locations are shown in Section 3.3, Figures 3.3-2 and 3.3-3.

3.1.5 TLD (DIRECT RADIATION)

Thermoluminescent dosimeters (TLDs) are used to measure direct radiation (gamma dose) in the environment. Environmental TLDs are supplied and processed quarterly by the AREVA NP Environmental Laboratory. The laboratory utilizes a Panasonic based system using UD-814 dosimeters, which are constructed of rectangular teflon wafers impregnated with 25% CaSO₄:Dy phosphor. Each dosimeter contains three calcium sulfate elements and one lithium borate element.

1. Environmental TLDs

Environmental TLDs are placed in five different geographical regions around site to evaluate effects of direct radiation as a result of plant operations. The following is a description of the five TLD geographical categories used in the NMPNS and JAFNPP Environmental Monitoring Program and the TLDs that make up each region:

TLD Geographical Category	Description
Onsite	TLDs placed at various locations within the site boundary, with three exceptions, are not required by the ODCM. (TLD locations comprising this group are: 3, 4, 5, 6, 7*, 18*, 23*, 24, 25, 26, 27, 28, 29, 30, 31, 39, 47, 103, 106 and 107)
Site Boundary	An inner ring of TLDs placed in the general area of the site boundary in each of the sixteen meteorological sectors. This category is required by the ODCM. (TLD locations comprising this group are: 7*, 18*, 23*, 75*, 76*, 77*, 78*, 79*, 80*, 81*, 82*, 83*, 84*, 85*, 86*, and 87*)

**TLD Geographical
Category**

Description

Offsite	An outer ring of TLDs placed 4 to 5 miles from the site in each of the 8 land based meteorological sectors. This category is required by the ODCM. (TLD locations comprising this group are 88*, 89*, 90*, 91*, 92*, 93*, 94*, and 95*)
Special Interest	TLDs placed in special interest areas of high population density and use. These TLDs are located at or near large industrial sites, schools, or nearby towns or communities. This category is required by the ODCM. (TLD locations comprising this group are: 9, 10, 11, 12, 13, 15*, 19, 51, 52, 53, 54, 55, 56*, 58*, 96*, 97*, 98, 99, 100, 101, 102, 108, and 109)
Control	TLDs placed in areas beyond significant influence of the site and plant operations. These TLDs are located to the SW, S and NE of the site at distances of 12.6 to 24.7 miles. This category is also required by the ODCM. (TLD locations comprising this group are 8*, 14*, 49*, 111, 113)

* TLD location required by the ODCM

Although the ODCM requires a total of 32 TLD stations; environmental TLDs are also placed at additional locations not required by the ODCM, within the Onsite, Special Interest and Control TLD categories to supplement the ODCM required Direct Radiation readings.

Two dosimeters are placed at each TLD monitoring location. The TLDs are sealed in polyethylene packages to ensure dosimeter integrity and placed in open webbed plastic holders and attached to supporting structures, such as utility poles.

Environmental TLD locations are shown in Section 3.3, Figures 3.3-2 and 3.3-3.

2. Independent Spent Fuel Storage Installation (ISFSI)

In order to provide adequate spent fuel storage capacity at the FitzPatrick plant, Entergy constructed an Independent Spent Fuel Storage Installation (ISFSI) onsite. On April 25, 2002, the ISFSI facility was placed in service.

TLDs are used to monitor direct radiation levels in the vicinity of the ISFSI facility. Twelve TLD locations were established around the ISFSI pad on the perimeter fence. Six additional TLD locations are located at varying distances from the pad to determine dose rates at points of interest relative to the storage area and are designated as optional locations. Background data was collected starting in October, 2000 at eight of the TLD locations on the perimeter fence. The remaining locations were established in October 2001.

Two dosimeters are placed at each TLD monitoring location. The TLDs are sealed in polyethylene packages to ensure dosimeter integrity and placed in the field using a supporting structure such as a fence or other immovable object.

ISFSI TLD locations are shown in Section 3.3, Table 3.3.1.

3.1.6 MILK

Milk samples are routinely collected from farms during the sampling year. These farms include indicator locations and one control location. Samples are normally collected April through December of the sample year. If plant related radionuclides are detected in samples in November and December of the previous year, milk collections are continued into the following year starting in January. If plant related radionuclides are not detected in the November and December samples, then milk collections do not commence until April of the following sampling year. Milk samples were not collected in January through March of 2008 as there were no positive detections of plant related radionuclides in samples collected during November and December of 2007.

The ODCM also requires that a sample be collected from a control location nine to twenty miles from the site and in a less prevalent wind direction. This location is in the south sector at a distance of 16 miles and serves as the control location.

Milk samples are collected in polyethylene bottles from a bulk storage tank at each sampled farm. Before the sample is drawn, the tank contents are agitated to assure a homogenous mixture of milk and butter fat. The samples are chilled, preserved, and shipped fresh to the analytical laboratory within thirty-six hours of collection in insulated shipping containers.

The milk sample locations are shown in Section 3.3, Figure 3.3-4. (Refer to Section 3.3, Table 3.3-1 for location designation and descriptions.)

3.1.7 FOOD PRODUCTS (VEGETATION)

Food products are collected once per year during the late summer harvest season. A minimum of three different kinds of broad leaf vegetation (edible or inedible) are collected from two different indicator garden locations. Sample locations are selected from available gardens identified in the annual census that have the highest estimated deposition values (D/Q) based on historical site meteorological data. Control samples are also collected from available locations greater than 15.4 miles distance from the site in a less prevalent wind direction. Control samples are of the same or similar type of vegetation when available.

Food product samples are analyzed for gamma emitters using gamma isotopic analysis.

Food product locations are shown in Section 3.3, Figure 3.3-5.

3.1.8 GROUND WATER MONITORING PROGRAM

The Nuclear Energy Institute (NEI) Ground Water Protection Initiative was established to determine the potential impact Nuclear Power Plants may have on the surrounding environment due to unplanned releases of radioactive liquids. Under NEI 07-07, Industry Ground Water Protection Initiative – Final Guidance Document, August 2007, ground water monitoring is accomplished through sampling of the water table around the plant and analyzing it for gamma emitters and tritium. In November of 2007, JAF drilled 5 ground water wells along the north edge of the property next to the lake. Samples obtained from these wells are analyzed on a quarterly basis to determine gamma emitters and tritium concentrations.

During the operating year of 2008, there were no unplanned releases or spills of radioactive liquids on the JAF site. Ground water monitoring was conducted but not required by the NEI document.

Ground Water samples are analyzed for gamma emitters using gamma isotopic analysis and tritium using liquid scintillation detector.

Ground water results are documented in the Annual Radiological Effluent Release Report for 2008.

Ground Water sample locations are shown in Section 3.3, Figure 3.3-7.

3.2 ANALYSES PERFORMED

Environmental sample analyses are performed at the James A. FitzPatrick Nuclear Power Plant (JAFNPP) Environmental Laboratory or by a contract laboratory. The following analyses were performed:

1. Air Particulate Filter – Gross Beta
2. Air Particulate Filter Composites – Gamma Spectral Analysis
3. Airborne Radioiodine – Gamma Spectral Analysis
4. Direct Radiation using Thermoluminescent Dosimeters (TLDs) – Analyses performed by a contractor laboratory – AREVA NP Environmental Laboratory.
5. Fish – Gamma Spectral Analysis
6. Food Products (vegetation) – Gamma Spectral Analysis
7. Milk – Gamma Spectral Analysis and I-131
8. Shoreline Sediment – Gamma Spectral Analysis
9. Special Samples (soil, food, bottom sediment, etc.) – Gamma Spectral Analysis
10. Surface Water Monthly Composites – Gamma Spectral Analysis, I-131
11. Surface Water Quarterly Composite – Tritium
12. Ground Water Quarterly Samples – Tritium

3.3 SAMPLE LOCATIONS

Section 3.3 provides maps illustrating sample locations. Sample locations referenced as letters and numbers on the report period data tables are consistent with designations plotted on the maps.

This section also contains an environmental sample location reference table (Table 3.3-1). This table contains the following information:

1. Sample Medium
2. Location Designation, (this column contains the key for the sample location and is consistent with the designation on the sample location maps and on the sample results data tables)
3. Location Description
4. Degrees and Distance of the sample location from the site

3.3.1 LIST OF FIGURES

Figure 3.3-1 New York State Map

Figure 3.3-2 Off-Site Environmental Station and TLD Locations Map

Figure 3.3-3 Onsite Environmental Station and TLD Locations Map

Figure 3.3-4 Milk and Surface Water Sample Locations Map

Figure 3.3-5 Nearest Residence, Food Product, Fish and Shoreline Sediment Sample Locations Map

Figure 3.3-6 Nearest Residence Locations Map

Figure 3.3-7 On-Site Ground Water Monitoring Wells Map

**TABLE 3.3-1
ENVIRONMENTAL SAMPLE LOCATIONS**

SAMPLE MEDIUM	MAP DESIGNATION	FIGURE NUMBER	LOCATION DESCRIPTION	DEGREES & DISTANCE (1) & (2)
Shoreline Sediment	05*	Figure 3.3-5	Sunset Bay	84° at 1.2 miles
	06	Figure 3.3-5	Langs Beach, Control	232° at 4.8 miles
Fish	02*	Figure 3.3-5	Nine Mile Point Transect	290° at 0.4 miles
	03*	Figure 3.3-5	FitzPatrick Transect	62° at 0.8 miles
	00*	Figure 3.3-5	Oswego Transect	237° at 5.9 miles
Surface Water	03*	Figure 3.3-4	FitzPatrick Inlet	53° at 0.6 miles
	08*	Figure 3.3-4	Oswego Steam Station Inlet	236° at 7.6 miles
	09	Figure 3.3-4	NMP Unit 1 Inlet	319° at 0.3 miles
	10	Figure 3.3-4	Oswego City Water	240° at 7.8 miles
	11	Figure 3.3-4	NMP Unit 2 Inlet (Split intake with two locations)	336° at 0.3 miles 353° at 0.3 miles
Air Radioiodine and Particulates	R-1*	Figure 3.3-2	R-1 Station, Nine Mile Point Road	92° at 1.8 miles
	R-2*	Figure 3.3-3	R-2 Station, Lake Road	107° at 1.1 miles
	R-3*	Figure 3.3-3	R-3 Station, Co. Rt. 29	133° at 1.4 miles
	R-4*	Figure 3.3-3	R-4 Station, Village of Lycoming, Co. Rt. 29	145° at 1.8 miles
	R-5*	Figure 3.3-2	R-5 Station, Montario Point Rd.	42° at 16.2 miles
	D-1	Figure 3.3-3	D1 Onsite Station	73° at 0.3 miles
	G	Figure 3.3-3	G Onsite Station	244° at 0.7 miles
	H	Figure 3.3-3	H Onsite Station	74° at 0.8 miles
	I	Figure 3.3-3	I Onsite Station	96° at 0.8 miles
	J	Figure 3.3-3	J Onsite Station	110° at 0.9 miles
	K	Figure 3.3-3	K Onsite Station	133° at 0.5 miles
	G	Figure 3.3-2	G Offsite Station, Saint Paul Street	226° at 5.4 miles
	D-2	Figure 3.3-2	D2 Offsite Station, Rt. 64	118° at 9.0 miles
	E	Figure 3.3-2	E Offsite Station, Rt. 4	162° at 7.1 miles
F	Figure 3.3-2	F Offsite Station, Dutch Ridge Road	192° at 7.7 miles	

(1) Degrees and distance based on Nine Mile Point Unit 2 Reactor Centerline rounded to the nearest 1/10 of a mile.

(2) Degrees and Distances updated by Global Positioning System (GPS) in 2006.

* Sample location required by ODCM

TABLE 3.3-1 (Continued)
ENVIRONMENTAL SAMPLE LOCATIONS

SAMPLE MEDIUM	MAP DESIGNATION	FIGURE NUMBER	LOCATION DESCRIPTION	DEGREES & DISTANCE		
				(1)	(2)	(3)
Thermoluminescent Dosimeters (TLD) (Continued)	3	Figure 3.3-3	D1 Onsite	71°	at	0.3 miles
	4	Figure 3.3-3	D2 Onsite	143°	at	0.4 miles
	5	Figure 3.3-3	E Onsite	180°	at	0.3 miles
	6	Figure 3.3-3	F Onsite	213°	at	0.5 miles
	7*	Figure 3.3-3	G Onsite	245°	at	0.7 miles
	8*	Figure 3.3-2	R-5 Offsite Control	42°	at	16.2 miles
	9	Figure 3.3-2	D1 Offsite – State Route 3	80°	at	11.4 miles
	10	Figure 3.3-2	D2 Offsite	118°	at	9.0 miles
	11	Figure 3.3-2	E Offsite	162°	at	7.1 miles
	12	Figure 3.3-2	F- Offsite	192°	at	7.6 miles
	13	Figure 3.3-2	G Offsite	226°	at	5.4 miles
	14*	Figure 3.3-2	DeMass Rd., SW Oswego - Control	227°	at	12.5 miles
	15*	Figure 3.3-2	Pole 66, W. Boundary - Bible Camp	240°	at	0.9 miles
	18*	Figure 3.3-3	Energy Info. Center - Lamp Post, SW	268°	at	0.4 miles
	19	Figure 3.3-2	East Boundary - JAF, Pole 9	83°	at	1.4 miles
	23*	Figure 3.3-3	H Onsite	73°	at	0.8 miles
	24	Figure 3.3-3	I Onsite	95°	at	0.8 miles
	25	Figure 3.3-3	J Onsite	109°	at	0.9 miles
	26	Figure 3.3-3	K Onsite	132°	at	0.5 miles
	27	Figure 3.3-3	N. Fence, N. of Switchyard, JAF	60°	at	0.4 miles
	28	Figure 3.3-3	N. Light Pole, N. of Screenhouse, JAF	68°	at	0.5 miles
	29	Figure 3.3-3	N. Fence, N. of W. Side	65°	at	0.5 miles
	30	Figure 3.3-3	N. Fence, (NW) JAF	57°	at	0.4 miles
	31	Figure 3.3-3	N. Fence, (NW) NMP-1	279°	at	0.2 miles
	39	Figure 3.3-3	N. Fence, Rad. Waste-NMP-1	298°	at	0.2 miles
	47	Figure 3.3-3	N. Fence, (NE) JAF	69°	at	0.6 miles
	49*	Figure 3.3-2	Phoenix, NY-Control	168°	at	19.7 miles
	51	Figure 3.3-2	Liberty & Bronson Sts., E of OSS	234°	at	7.3 miles
	52	Figure 3.3-2	E. 12th & Cayuga Sts., Oswego School	227°	at	5.9 miles
	53	Figure 3.3-2	Broadwell & Chestnut Sts. Fulton H.S.	183°	at	13.7 miles

(1) Degrees and distance based on Nine Mile Point Unit 2 Reactor Centerline rounded to the nearest 1/10 of a mile.

(2) Degrees and Distances updated by Global Positioning System (GPS) in 2006.

* Sample location required by ODCM

TABLE 3.3-1 (Continued)
ENVIRONMENTAL SAMPLE LOCATIONS

SAMPLE MEDIUM	MAP DESIGNATION	FIGURE NUMBER	LOCATION DESCRIPTION	DEGREES & DISTANCE		
				(1)	&	(2)
Thermoluminescent Dosimeters (TLD) (Continued)	54	Figure 3.3-2	Mexico High School	115°	at	9.4 miles
	55	Figure 3.3-2	Gas Substation Co. Rt. 5-Pulaski	75°	at	13.0 miles
	56*	Figure 3.3-2	Rt. 104-New Haven Sch. (SE Corner)	124°	at	5.2 miles
	58*	Figure 3.3-2	Co Rt. 1A-Alcan (E. of E. Entrance Rd.)	222°	at	3.0 miles
	75*	Figure 3.3-3	Unit 2, N. Fence, N. of Reactor Bldg.	354°	at	0.1 miles
	76*	Figure 3.3-3	Unit 2, N. Fence, N. of Change House	25°	at	0.1 miles
	77*	Figure 3.3-3	Unit 2, N. Fence, N. of Pipe Bldg.	36°	at	0.2 miles
	78*	Figure 3.3-3	JAF. E. of E. Old Lay Down Area	85°	at	1.0 miles
	79*	Figure 3.3-3	Co. Rt. 29, Pole #63, 0.2 mi. S. of Lake Rd.	120°	at	1.2 miles
	80*	Figure 3.3-3	Co. Rt. 29, Pole #54, 0.7 mi. S. of Lake Rd.	136°	at	1.5 miles
	81*	Figure 3.3-3	Miner Rd., Pole #16, 0.5 mi. W. of Rt. 29	159°	at	1.6 miles
	82*	Figure 3.3-3	Miner Rd., Pole # 1-1/2, 1.1 mi. W. of Rt. 29	180°	at	1.6 miles
	83*	Figure 3.3-3	Lakeview Rd., Tree 0.45 mi. N. of Miner Rd.	203°	at	1.2 miles
	84*	Figure 3.3-2	Lakeview Rd., N., Pole #6117, 200ft. N. of Lake Rd.	226°	at	1.1 miles
	85*	Figure 3.3-3	Unit 1, N. Fence, N. of W. Side of Screen House	292°	at	0.2 miles
	86*	Figure 3.3-3	Unit 2, N. Fence, N of W. Side of Screen House	311°	at	0.1 miles
	87*	Figure 3.3-3	Unit 2, N. Fence, N. of E. Side of Screen House	333°	at	0.1 miles
	88*	Figure 3.3-2	Hickory Grove Rd., Pole #2, 0.6 mi. N. of Rt. 1	97°	at	4.5 miles
	89*	Figure 3.3-2	Leavitt Rd., Pole #16, 0.4 mi. S. of Rt. 1	112°	at	4.3 miles
	90*	Figure 3.3-2	Rt. 104, Pole #300, 150 ft. E. of Keefe Rd.	135°	at	4.2 miles
	91*	Figure 3.3-2	Rt 51A, Pole #59, 0.8 mi. W. of Rt. 51	157°	at	4.9 miles
	92*	Figure 3.3-2	Maiden Lane Rd., Power Pole, 0.6 mi. S. of Rt. 104	183°	at	4.4 miles
	93*	Figure 3.3-2	Rt. 53 Pole 1-1, 120 ft. S. of Rt. 104	206°	at	4.4 miles
	94*	Figure 3.3-2	Rt. 1, Pole #82, 250 ft. E. of Kocher Rd. (Co. Rt. 63)	224°	at	4.4 miles
95*	Figure 3.3-2	Alcan W access Rd., Joe Fultz Blvd, Pole #21	239°	at	3.7 miles	
96*	Figure 3.3-2	Creamery Rd., 0.3 mi. S. of Middle Rd., Pole 1-1/2	199°	at	3.6 miles	
97*	Figure 3.3-3	Rt. 29, Pole #50, 200ft. N. of Miner Rd.	145°	at	1.8 miles	
98	Figure 3.3-2	Lake Rd., Pole #145, 0.15 mi. E. of Rt 29	102°	at	1.2 miles	

(1) Degrees and distance based on Nine Mile Point Unit 2 Reactor Centerline rounded to the nearest 1/10 of a mile.

(2) Degrees and Distances updated by Global Positioning System (GPS) in 2006.

* Sample location required by ODCM

TABLE 3.3-1 (Continued)
ENVIRONMENTAL SAMPLE LOCATIONS

SAMPLE MEDIUM	MAP DESIGNATION	FIGURE NUMBER	LOCATION DESCRIPTION	DEGREES & DISTANCE		
				(1)	(2)	(3)
Thermoluminescent Dosimeters (TLD) (Continued)	99	Figure 3.3-2	NMP Rd., 0.4 mi. N. of Lake Rd., Env. Station R1	92°	at	1.8 miles
	100	Figure 3.3-3	Rt. 29 & Lake Rd., Env. Station R2	106°	at	1.1 miles
	101	Figure 3.3-3	Rt. 29, 0.7 mi. S. of Lake Rd., Env. Station R3	133°	at	1.4 miles
	102	Figure 3.3-2	EOF/Env. Lab, Rt 176, E. Driveway, Lamp Post	175°	at	11.9 miles
	103	Figure 3.3-3	EIC, East Garage Rd., Lamp Post	268°	at	0.4 miles
	104	Figure 3.3-2	Parkhurst Rd., Pole #23, 0.1 mi. S. of Lake rd.	102°	at	1.4 miles
	105	Figure 3.3-3	Lake view Rd. Pole #36, 0.5 mi. S. of Lake Rd.	199°	at	1.4 miles
	106	Figure 3.3-3	Shoreline Cove, W. of NMP-1, Tree on W. Edge	274°	at	0.3 miles
	107	Figure 3.3-3	Shoreline Cove, W. of NMP-1, 30 ft SSW of #106	273°	at	0.3 miles
	108	Figure 3.3-3	Lake Rd., Pole #142, 300 ft E. of Rt. 29 S.	105°	at	1.1 miles
	109	Figure 3.3-3	Tree North of Lake Rd., 300 ft E. of Rt. 29 N	104°	at	1.1 miles
	111	Figure 3.3-2	Control, State Route 38, Sterling NY	214°	at	21.8 miles
	112	Figure 3.3-2	EOF/Env. Lab, Oswego County Airport	175°	at	11.9 miles
113	Figure 3.3-2	Control, Baldwinsville, NY	178°	at	24.7miles	
Cows Milk	76	Figure 3.3-4	Indicator Location	120°	at	6.3 miles
	55	Figure 3.3-4	Indicator Location	97°	at	8.7 miles
	4	Figure 3.3-4	Indicator Location	115°	at	7.6 miles
	77*	Figure 3.3-4	Control Location	190°	at	16.0 miles
Food Products	133*	Figure 3.3-5	Indicator Location	83°	at	1.6 miles
	48*	Figure 3.3-5	Indicator Location	83°	at	1.5 miles
	142**	Figure 3.3-5	Indicator Location	143°	at	1.7 miles
	144**	Figure 3.3-5	Indicator Location	139°	at	1.6 miles
	C2*	Figure 3.3-5	Control Location	222°	at	15.4 miles
	484**	Figure 3.3-5	Indicator Location	125°	at	1.3 miles
Nearest Residence (NMP)	Based on NMP Unit 2 Centerline – Refer to Figure 3.3-5					
Nearest Residence (JAF)	Based on JAF Centerline – Refer to Figure 3.3-6					

- (1) Degrees and distance based on Nine Mile Point Unit 2 Reactor Centerline
(2) Degrees and Distances updated by Global Positioning System (GPS) in 2006.
* Sample location required by ODCM
** Optional sample

TABLE 3.3-1 (Continued)
ENVIRONMENTAL SAMPLE LOCATIONS

SAMPLE MEDIUM	LOCATION DESIGNATION	FIGURE NUMBER	LOCATION DESCRIPTION
Thermoluminescent Dosimeters (TLD)	I-1*		ISFSI West Fence, South End of Storage Pad
	I-2*		ISFSI West Fence, Center of Storage Pad
	I-3*		ISFSI West Fence, North End of Storage Pad
	I-4*		ISFSI North Fence, West End of Storage Pad
	I-5*		ISFSI North Fence, Center of Storage Pad
	I-6*		ISFSI North Fence, East End of Storage Pad
	I-7*		ISFSI East Fence, North End of Storage Pad
	I-8*		ISFSI East Fence, Center of Storage Pad
	I-9*		ISFSI East Fence, South End of Storage Pad
	I-10*		ISFSI South Fence, East End of Storage Pad
	I-11*		ISFSI South Fence, Center of Storage Pad
	I-12*		ISFSI South Fence, West End of Storage Pad
	I-13H		ISFSI Building and Grounds Garage, East of Pad
	I-14H		ISFSI Tree ~100 yards South of Pad
	I-15H		ISFSI Transmission Line Tower South of Pad at East /West Access
	I-16H		ISFSI Perimeter Fence ~100 yards West of Pad on Pad Centerline
	I-17H		ISFSI North Fence of Main Switch Yard on Pad Centerline
	I-18H		ISFSI North Inner Perimeter Fence at Lake Shore on Pad Centerline
Ground Water Monitoring Wells	MW-5	Figure 3.3-7	North West edge of property
	MW-6	Figure 3.3-7	North / North West edge of property
	MW-7	Figure 3.3-7	North edge of property
	MW-8	Figure 3.3-7	North / North East edge of property
	MW-9	Figure 3.3-7	North East edge of property

* Sample location required by ODCM

H indicates Optional TLD location

FIGURE 3.3-1
NEW YORK STATE MAP

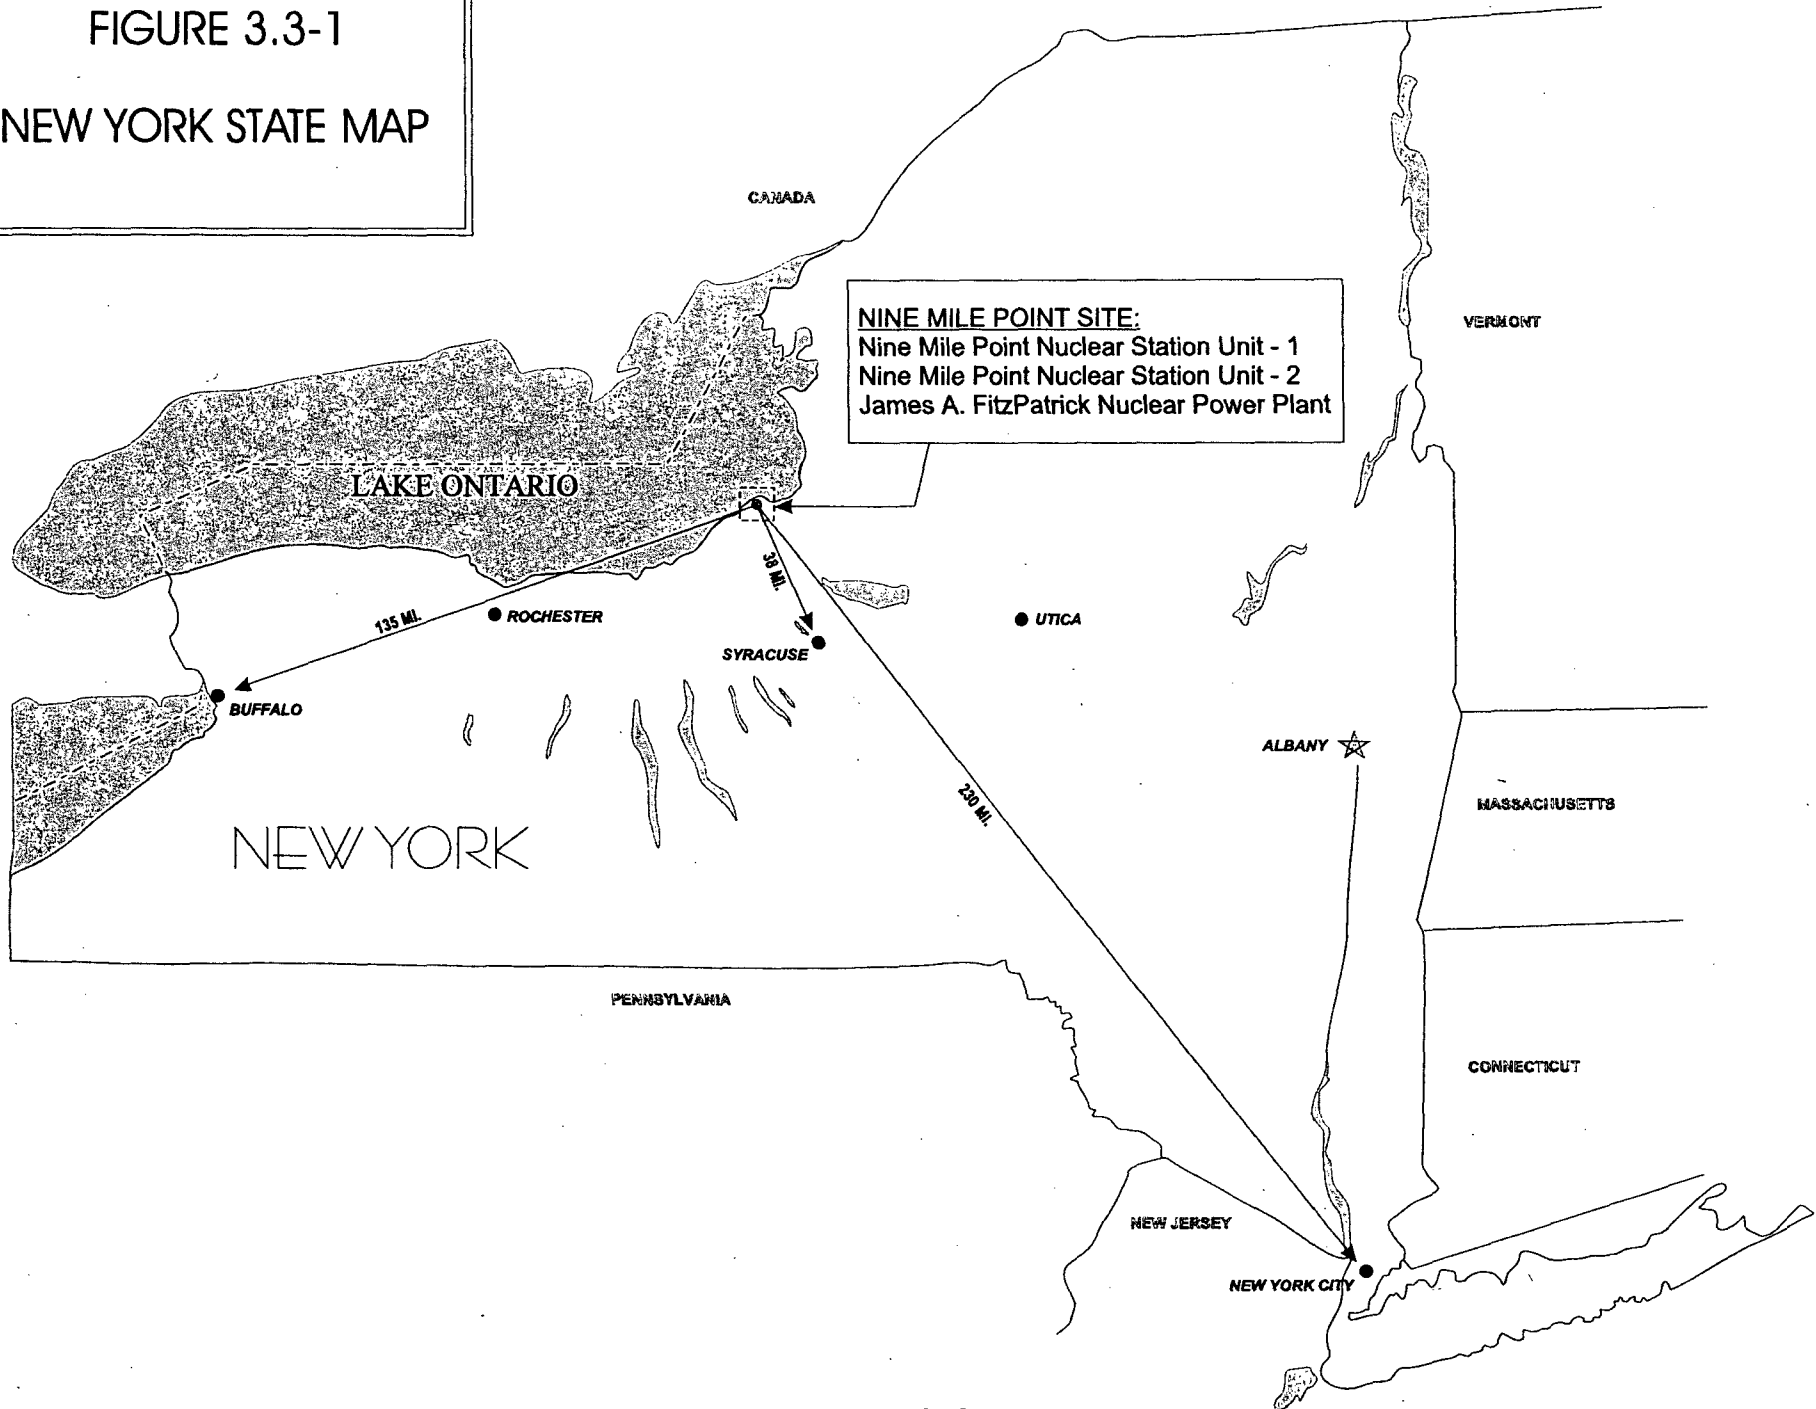


FIGURE 3.3-2


OFF-SITE ENVIRONMENTAL STATION
AND TLD LOCATIONS

- KEY:
- TLD LOCATION
 - ENVIRONMENTAL STATION


Oswego County New York

Lake Ontario

SCALE IN MILES



Nine Mile Point
Nuclear Station Unit - 1

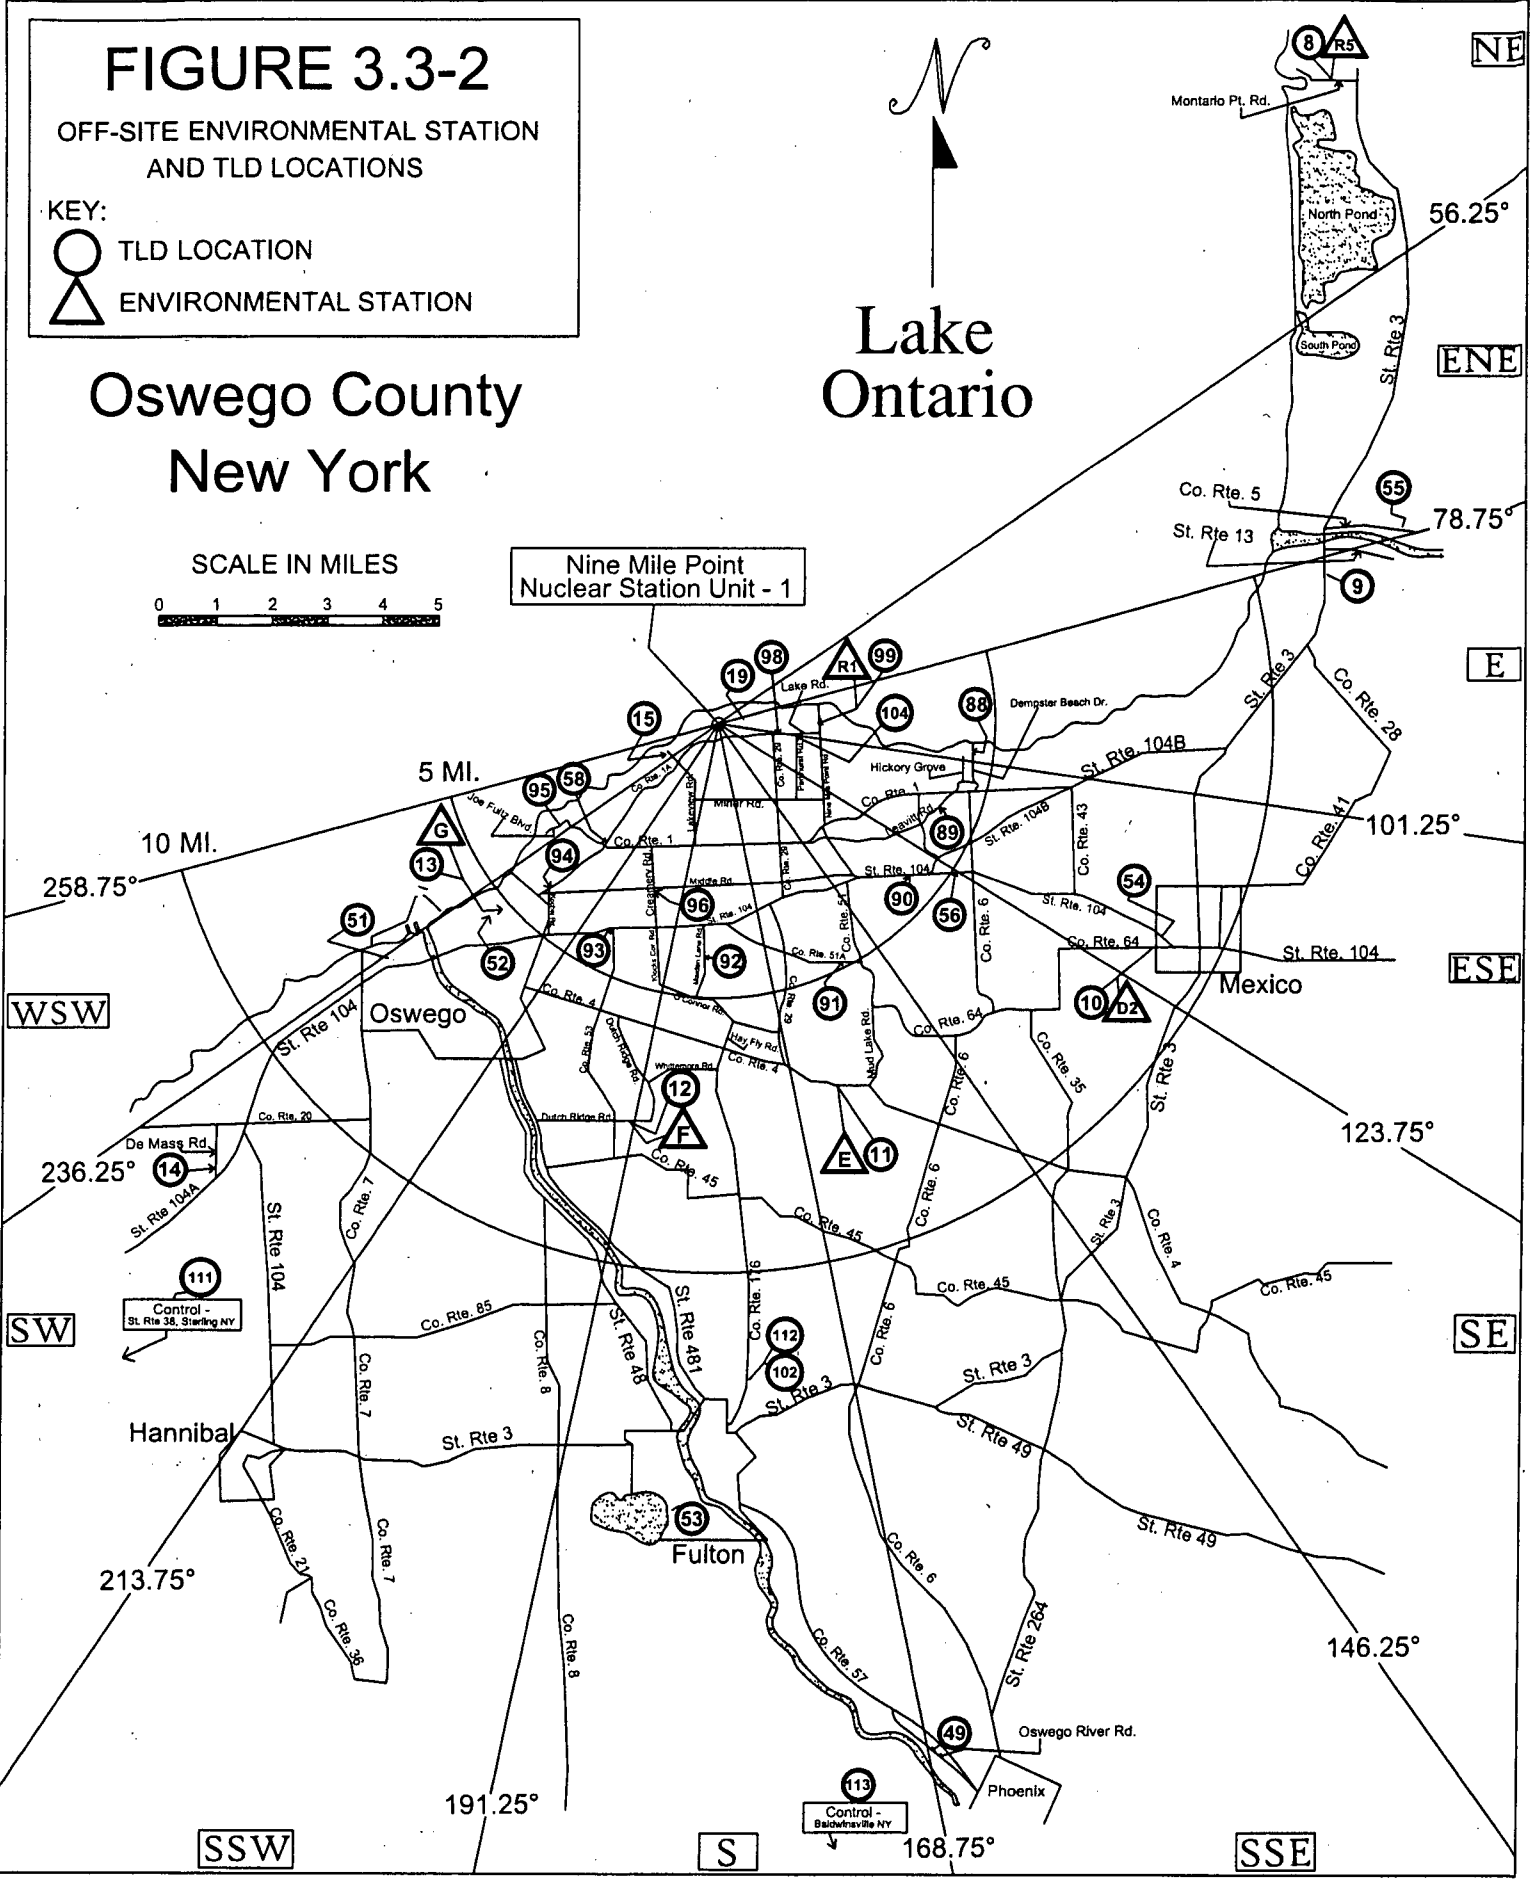

Site Map

Lake Ontario

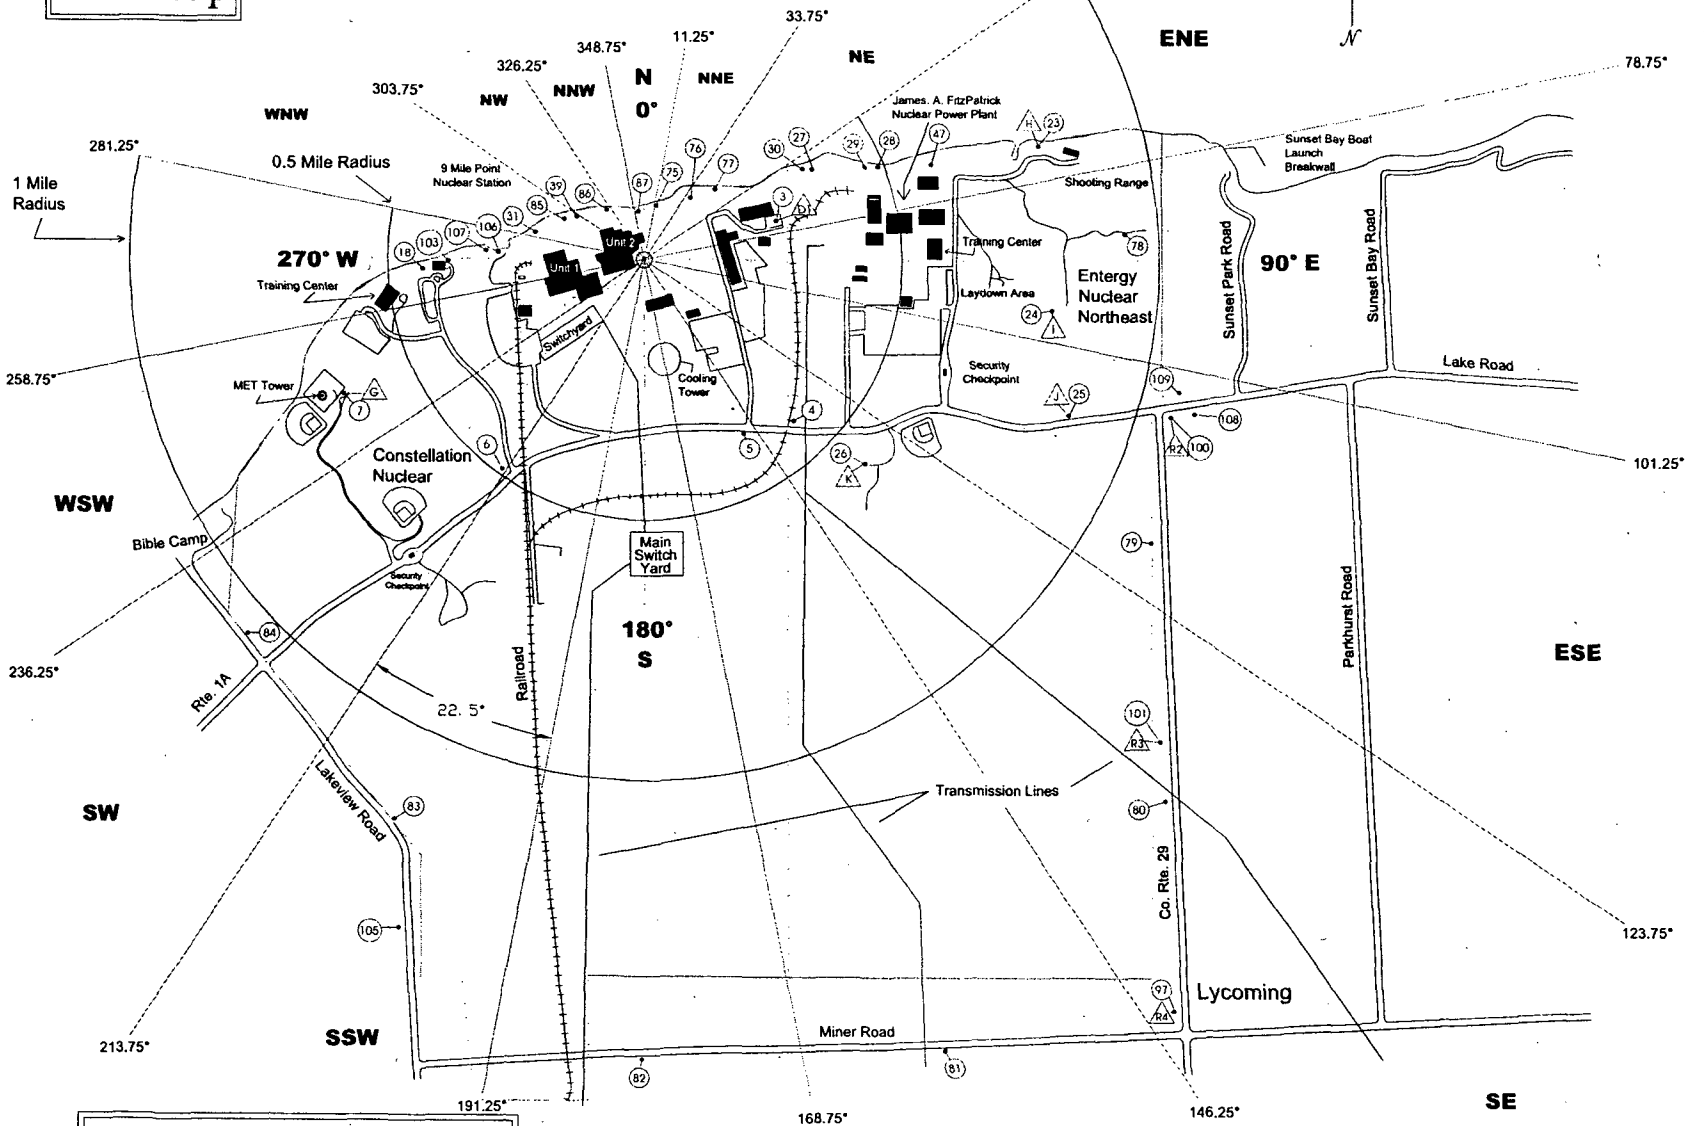


FIGURE 3.3-3
ONSITE ENVIRONMENTAL STATION
AND TLD LOCATIONS
KEY:
 ▲ ENVIRONMENTAL STATIONS
 ○ TLD LOCATIONS






FIGURE 3.3-4

MILK AND SURFACE
WATER SAMPLE LOCATIONS

KEY:

-  SURFACE WATER LOCATION
-  MILK SAMPLE LOCATION

Oswego County New York

Lake Ontario

SCALE IN MILES



Nine Mile Point
Nuclear Station Unit - 1

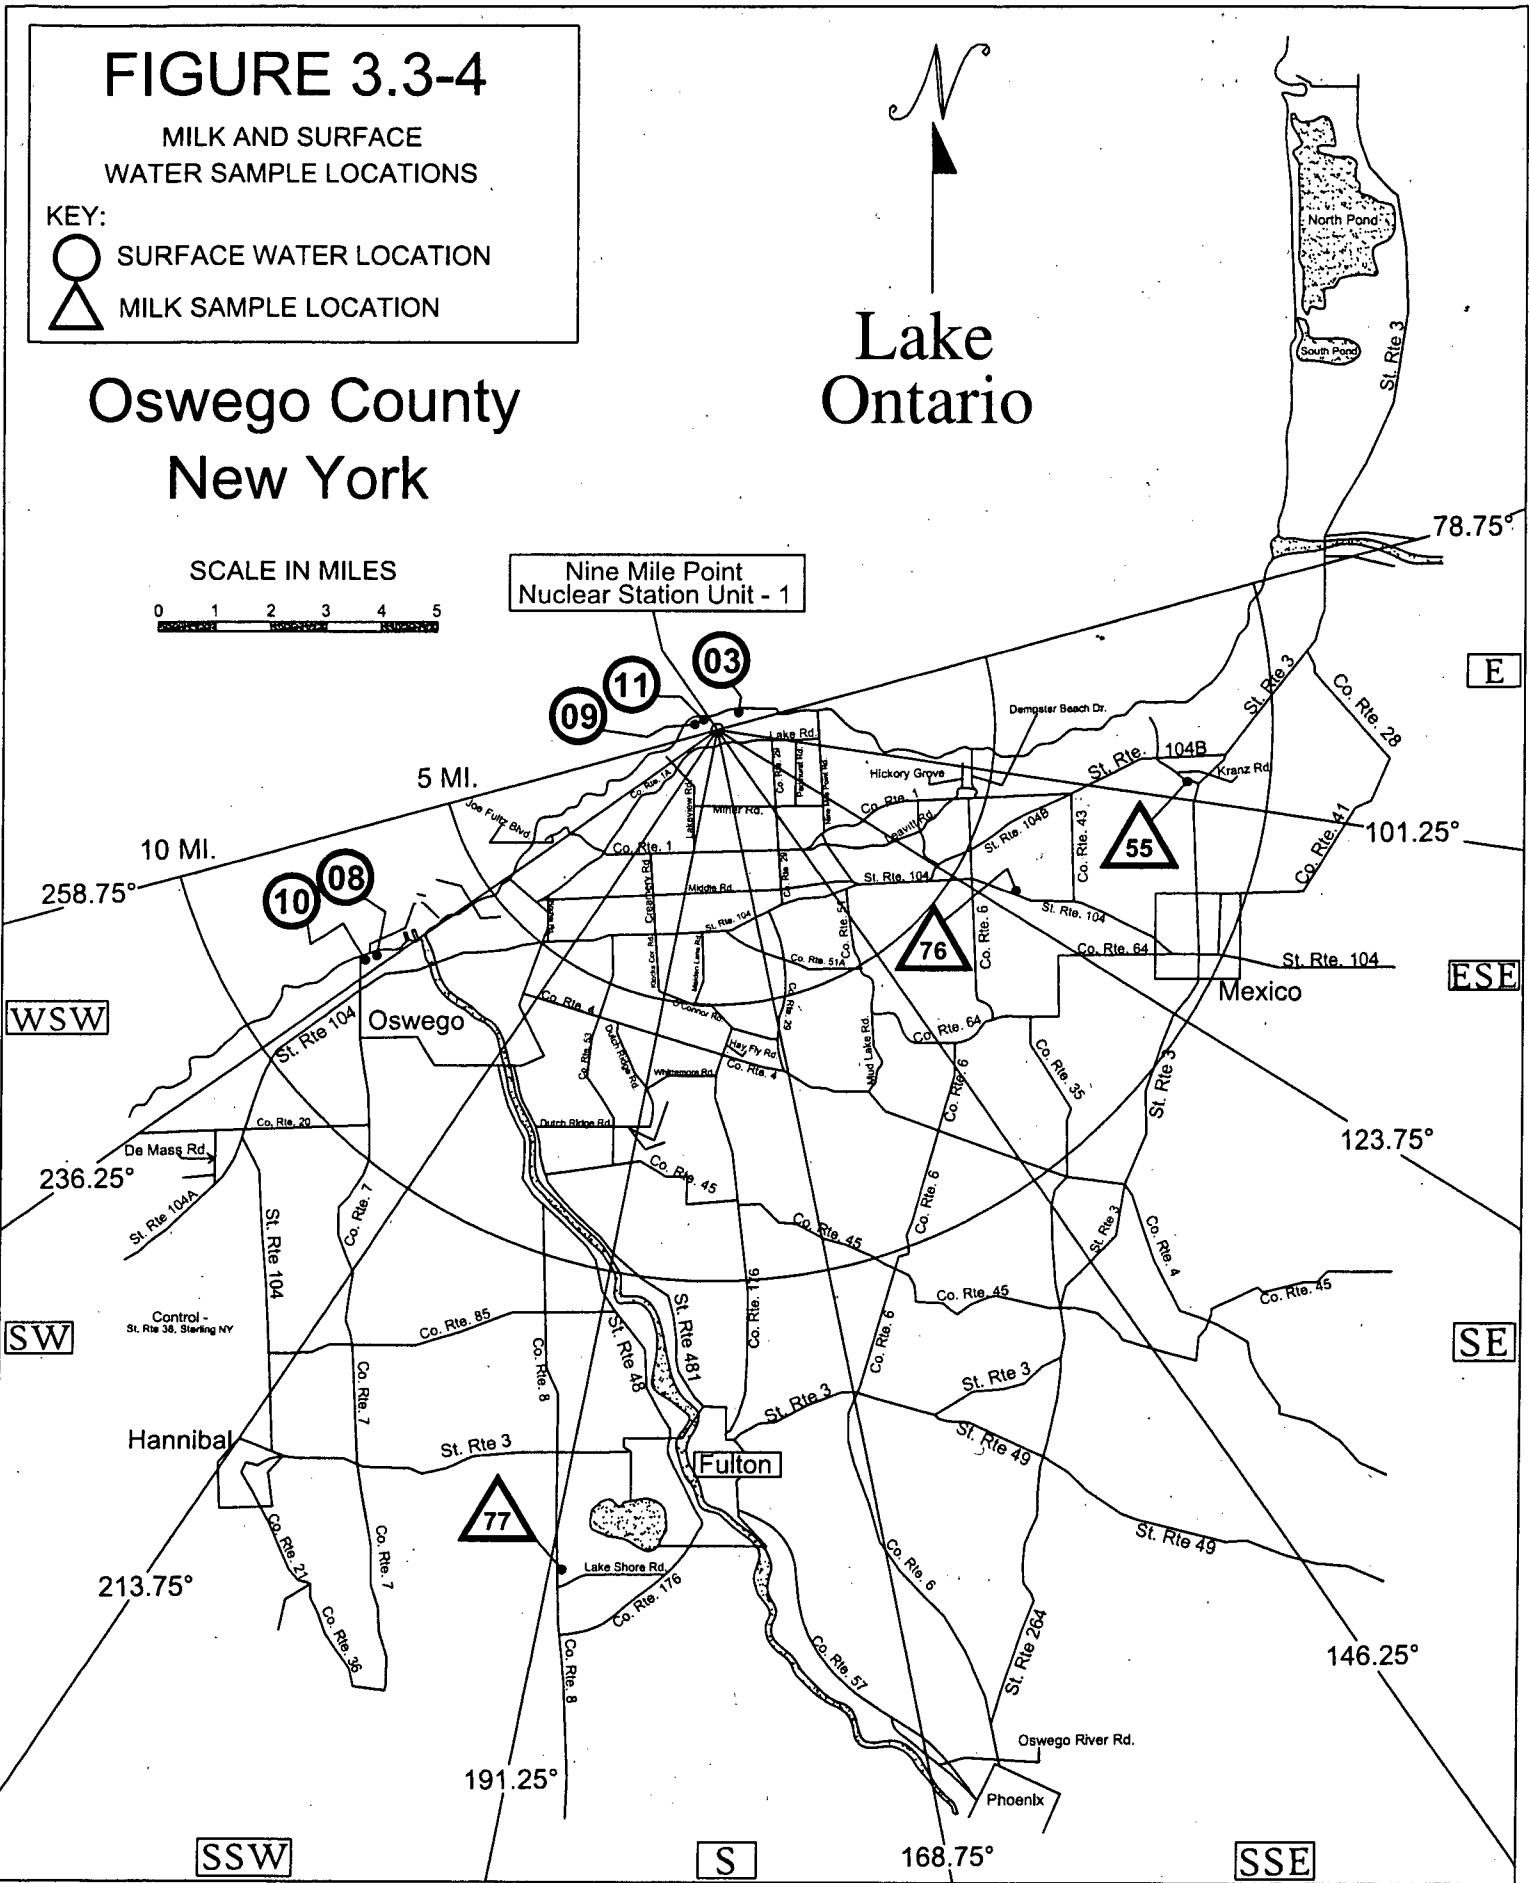



FIGURE 3.3-5

NEAREST RESIDENCE, FOOD PRODUCT FISH, AND SHORELINE SEDIMENT SAMPLE LOCATIONS


KEY:

- FISH
- △ FOOD PRODUCT
- SHORELINE SEDIMENT
- NEAREST RESIDENCE (Based on NMP-Unit 2 Centerline)



 Lake Ontario

Oswego County
New York

SCALE IN MILES



Nine Mile Point
Nuclear Station Unit - 1

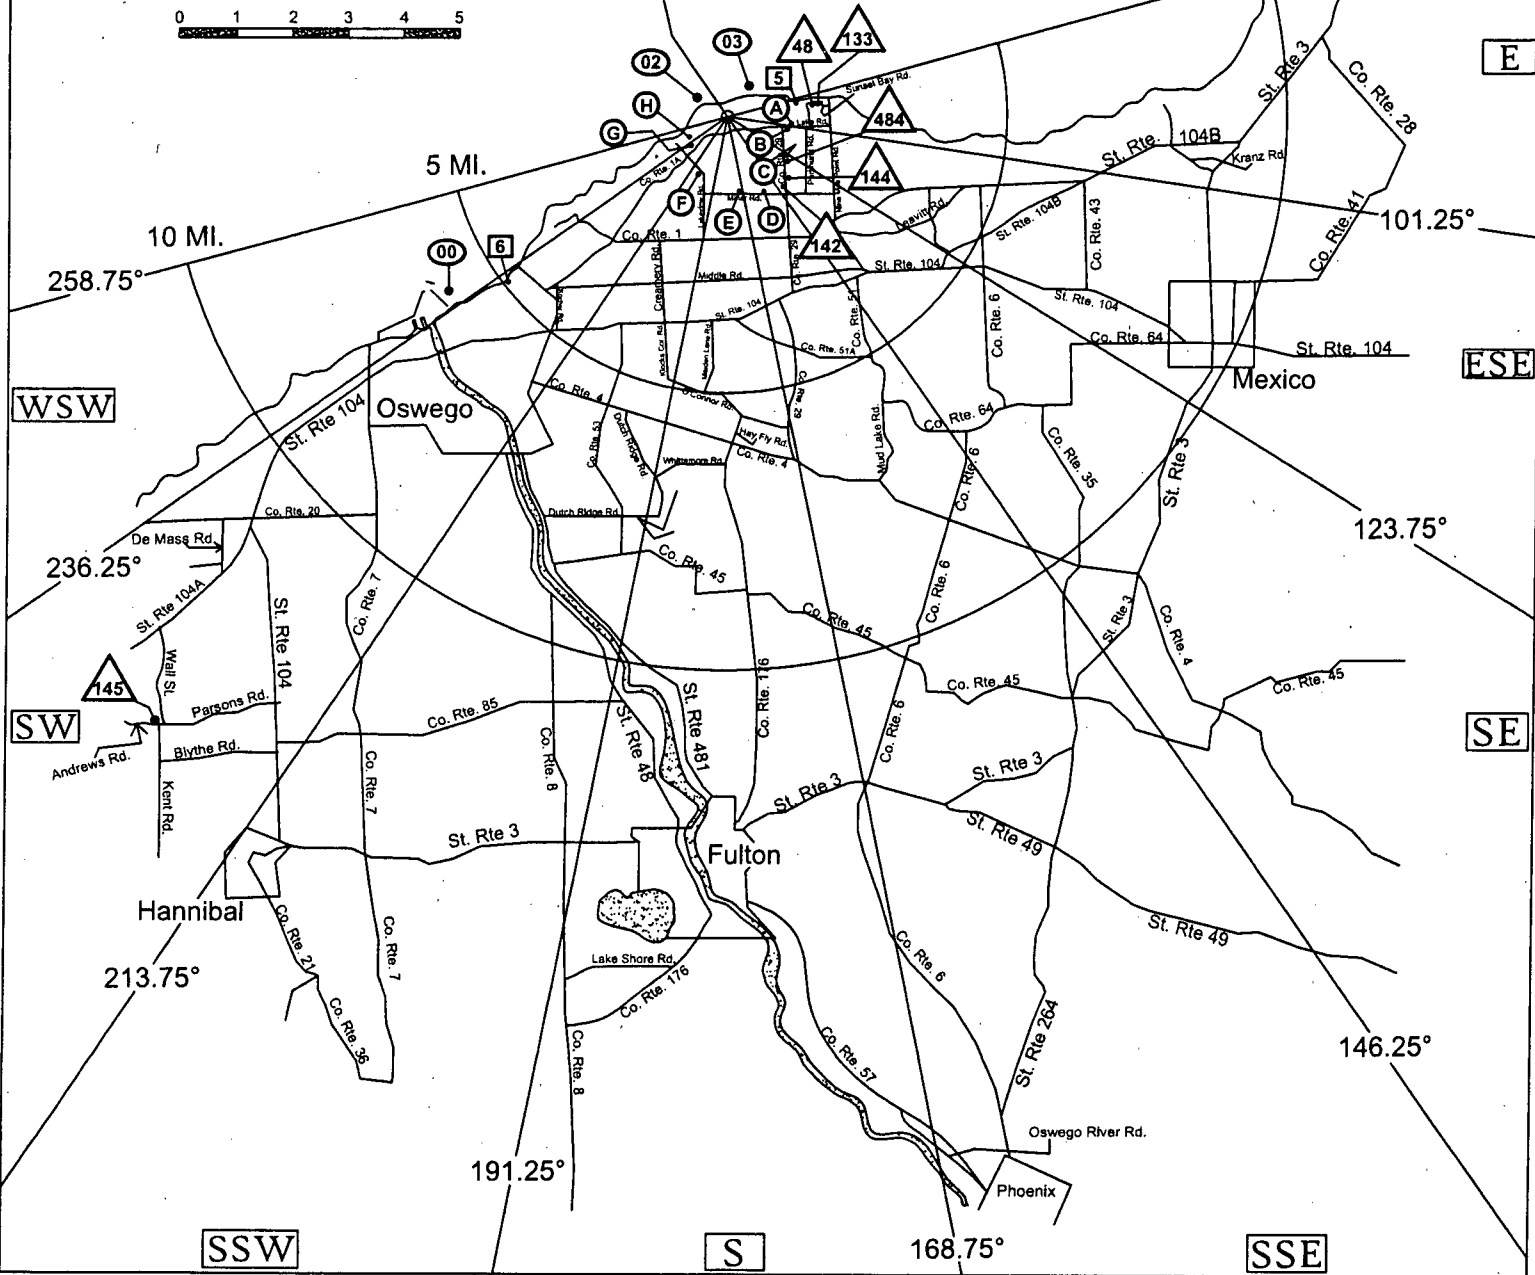


**OSWEGO COUNTY
NEW YORK**




**FIGURE 3.3-6
NEAREST RESIDENCE
LOCATIONS - JAF**


KEY:
○ NEAREST RESIDENCE LOCATIONS
BASED ON JAF CENTERLINE



LAKE ONTARIO

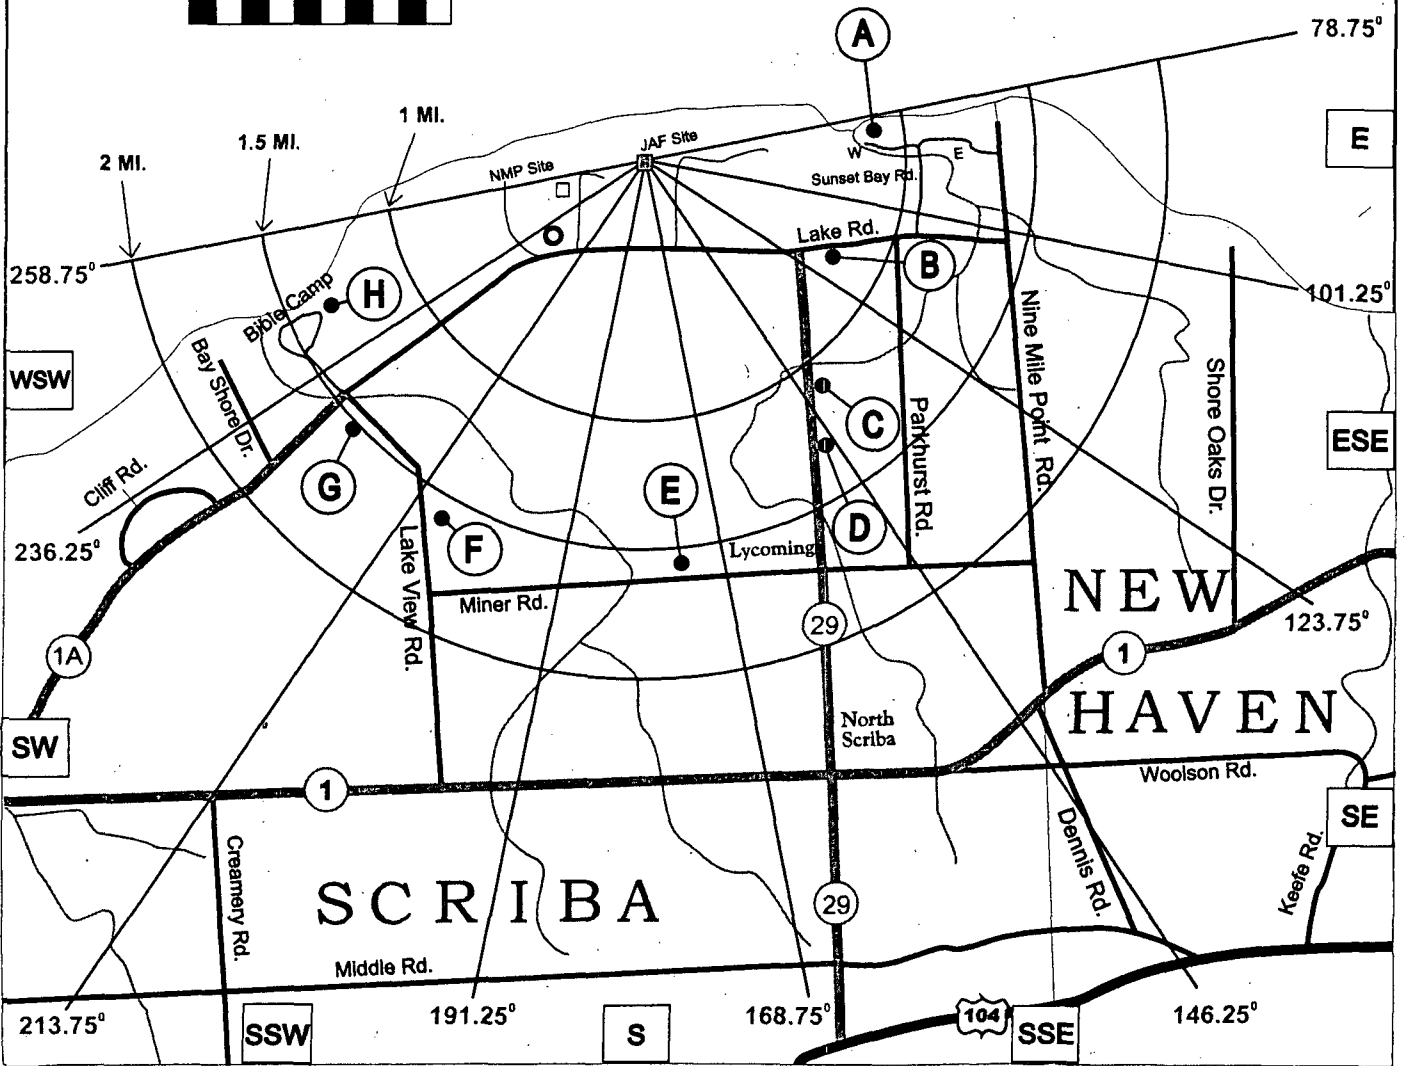


LAKE ONTARIO

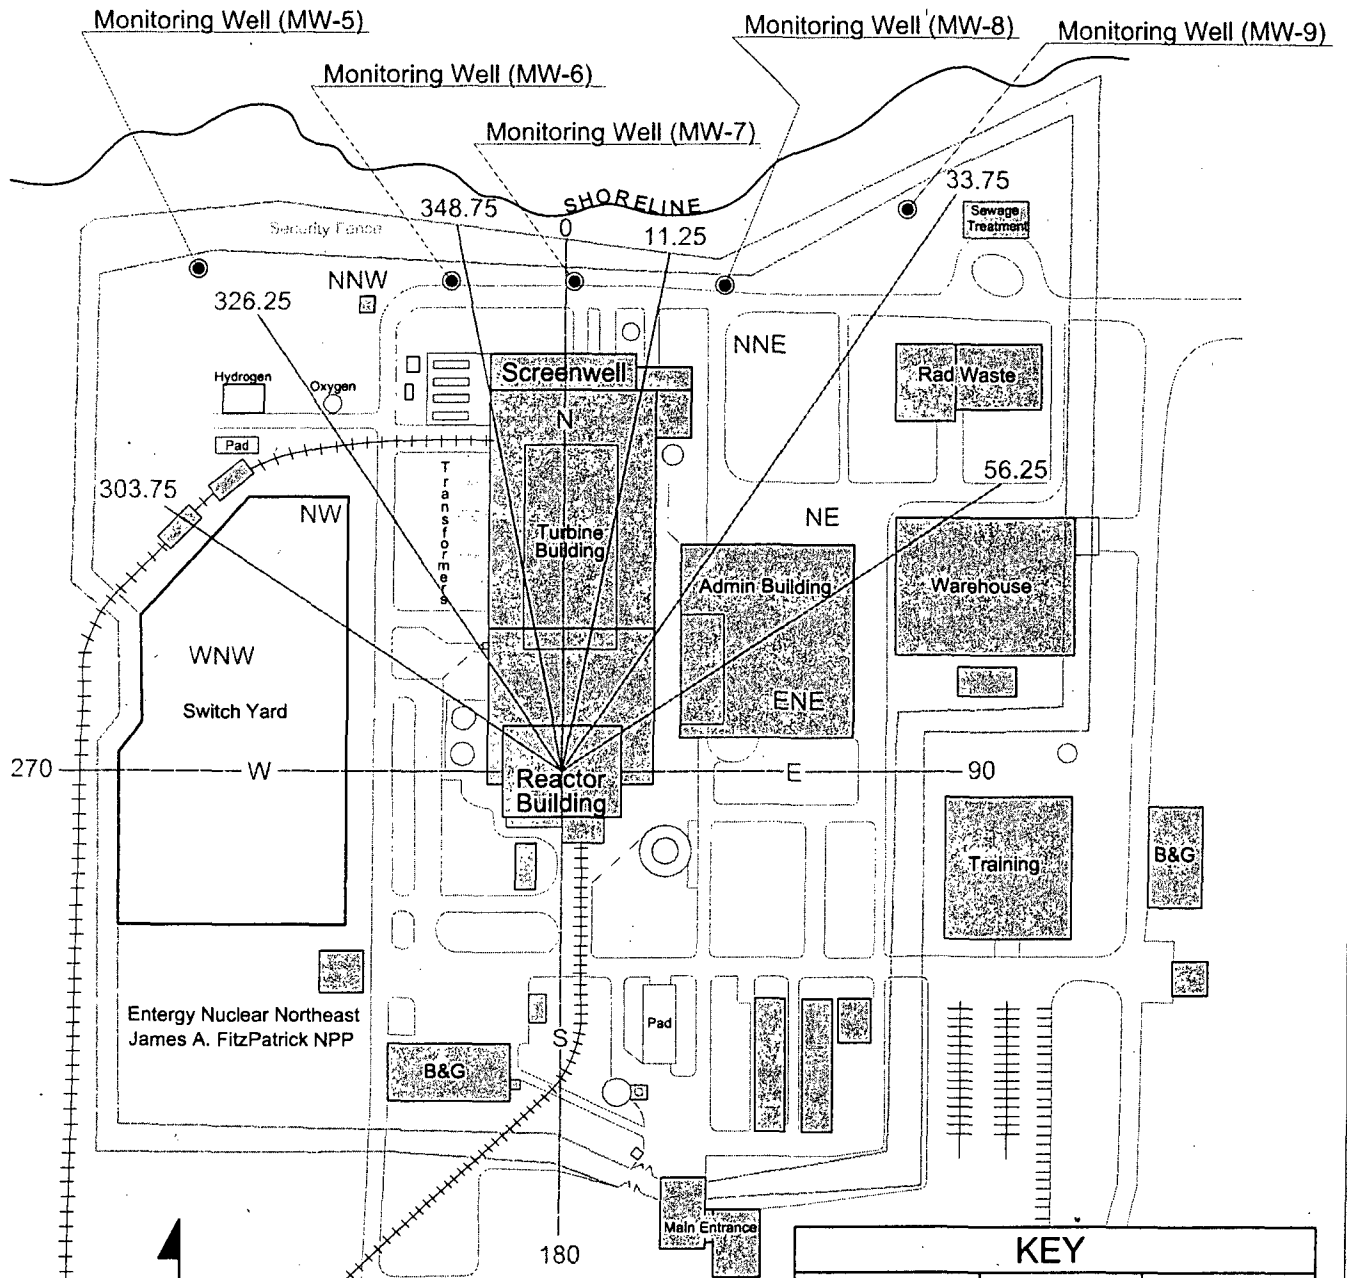

KEY		
LOCATION	DISTANCE (Yards)	DIRECTION (Degrees)
(Based on JAF Rx Bldg.)		
MW - 5	284	323
MW - 6	231	346
MW - 7	224	1
MW - 8	235	18
MW - 9	300	31

FIGURE 3.3-7
JAF ON-SITE GROUND WATER MONITORING WELLS

- Monitoring Well Location



3.1 LAND USE CENSUS

The ODCM requires that a milch animal census and a residence census be conducted annually out to a distance of five miles. Milch animals are defined as any animal that is routinely used to provide milk for human consumption.

The milch animal census is an estimation of the number of cows and goats within an approximate ten mile radius of the Nine Mile Point Site. The census is done once per year in the summer. It is conducted by sending questionnaires to previous milch animal owners, and by road surveys to locate any possible new owners. In the event that questionnaires are not answered, the owners are contacted by telephone or in person. The Oswego County Cooperative Extension Service was also contacted to provide any additional information.

The residence census is conducted each year to identify the closest residence in each of the 22.5 degree meteorological sectors out to a distance of five miles. A residence, for the purposes of this census, is a residence that is occupied on a part time basis (such as a summer camp), or on a full time, year round basis. Several of the site meteorological sectors are over Lake Ontario, therefore, there are only eight sectors over land where residences are located within five miles.

In addition to the milch animal and residence census, a garden census is performed. The census is conducted each year to identify the gardens near the site that are to be used for the collection of food product samples. The results of the garden census are not provided in this report. The results are used only to identify appropriate sample locations. The garden census is not required by the ODCM if broadleaf vegetation sampling and analysis are performed.

3.2 CHANGES TO THE REMP PROGRAM

The following changes were implemented during the 2008 sampling program:

3.2.1 Sediment Sampling Program

During the report period, one sample location for sediment from a shoreline area with existing or potential recreational value was changed. The ODCM required location was moved due to shoreline erosion. The new location is in the same geographical location and meteorological sector.

3.3 DEVIATION AND EXCEPTIONS TO THE PROGRAM

The noted exceptions to the 2008 sample program address only those samples or monitoring requirements which are required by the ODCM, Part I, Table 5.1-1. This section satisfies the reporting requirements of ODCM, Part I, Section 5.1.1.c.1.

3.3.1 ODCM Program Deviations

The following are deviations from the program specified by the ODCM:

1. The air sampling pump at the R-5 Offsite Environmental Sampling Station was inoperable for approximately 3 hours during the sampling period of 8/19/08 to 8/26/08. The air sample pump was running at the time of sample collection. The inoperability of the pump was due to loss of power to the sampler. No corrective actions were required to restore unit to service.
2. The air sampling pump at the R-5 Offsite Environmental Sampling Station was inoperable for 46.7 hours during the sampling period of 8/26/08 to 9/03/08. The air sample pump was running at the time of sample collection. The sample pump out of service time was determined based on the sample pump run time integrator. The inoperability of the pump was due to equipment failure. Air sample pump was replaced.
3. The air sampling pump at the R-5 Offsite Environmental Sampling Station was inoperable for 14.5 hours during the sampling period of 9/03/08 to 9/05/08. The air sample pump was running at the time of sample collection. The sample pump out of service time was determined based on the sample pump run time integrator. The air sample pump and blower fan unit were replaced.
4. The air sampling pumps at the R-3 offsite and R-4 offsite Environmental Sampling Stations were inoperable for 30.6 hours and 31.3 hours, respectively during the sampling period of 9/09/08 to 9/16/08. The sample pump out of service time was determined based on the sample pump run time integrator. The inoperability of the pump was due to loss of power to the sampler. The power outage was due to Hurricane Ike. No corrective actions were required to restore unit to service.
5. The air sampling pump at the R-5 Offsite Environmental Sampling Station was inoperable for 4 hours during the sampling period of 10/28/08 to 11/04/08. The air sample pump was running at the time of sample collection. The sample pump out of service time was determined based on the sample pump run time integrator. The inoperability of the pump was due to loss of power to the sampler due to high winds. No corrective actions were required to restore unit to service.
6. The air sampling pumps at the R-3 Offsite and R-4 Offsite Environmental Sampling Stations were each inoperable for 2.4 hours during the sampling period of 11/25/08 to 12/02/08. The air sample pumps were running at the time of sample collection. The sample pump out of service time was determined based on the sample pump run time integrator. The inoperability of the pump was due to loss of power to the sampler. No corrective actions were required to restore unit to service.

3.3.2 Air Sampling Station Operability Assessment

The ODCM required air sampling program consists of 5 individual sampling locations. The collective operable time period for the air monitoring stations was 43,785 hours out of a possible 43,920 hours. The air sampling availability factor for the report period was 99.69%.

3.4 STATISTICAL METHODOLOGY

There are a number of statistical calculation methodologies used in evaluating the data from the environmental monitoring program. These methodologies include determination of standard deviation, the mean and associated error for the mean, and the lower limit of detection (LLD).

3.4.1 ESTIMATION OF THE MEAN AND STANDARD DEVIATION

The mean (\bar{X}) and standard deviation (s) were used in the reduction of the data generated by the sampling and analysis of the various media in the JAFNPP Radiological Environmental Monitoring Program (REMP). The following equations were utilized to compute the mean (\bar{X}) and the standard deviation (s):

1. Mean

$$\bar{X} = \frac{\sum_{i=1}^n X_i}{N}$$

Where,

\bar{X} = estimate of the mean

i = individual sample

N, n = total number of samples with positive indications

X_i = value for sample i above the lower limit of detection.

2. Standard Deviation

$$s = \left[\frac{\sum_{i=1}^n (X_i - \bar{X})^2}{(N-1)} \right]^{1/2}$$

Where,

\bar{X} = mean for the values of X

s = standard deviation for the sample population

3.4.2 ESTIMATION OF THE MEAN & THE ESTIMATED ERROR FOR THE MEAN

In accordance with program policy, when the initial count indicates the presence of a plant related radionuclide(s) in a sample, two recounts of the sample may be required. When a radionuclide is positively identified in two or more counts, the analytical result for the radionuclide is reported as the mean of the positive detections and the associated propagated error for that mean. In cases where more than one positive sample result exists, the mean of the sample results and the estimated error for the mean are reported in the Annual Report.

The following equations were utilized to estimate the mean (\bar{X}) and the associated propagated error.

1. Mean

$$\bar{X} = \frac{\sum_{i=1}^n X_i}{N}$$

Where,

\bar{X} = estimate of the mean

i = individual sample

N,n = total number of samples with positive indications

X_i = value for sample i above the lower limit of detection

2. Error of the Mean (Reference 18)

$$ERROR \quad MEAN = \frac{\left[\sum_{i=1}^n (ERROR)^2 \right]^{1/2}}{N}$$

Where,

- ERROR MEAN = propagated error
- i = individual sample
- ERROR = 1 sigma* error of the individual analysis
- N, n = number of samples with positive indications

* Sigma (σ)

Sigma is the Greek letter used to represent the mathematical term Standard Deviation.

Standard Deviation is a measure of dispersion from the arithmetic mean of a set of numbers.

3.4.3 LOWER LIMIT OF DETECTION (LLD)

The LLD is the predetermined concentration or activity level used to establish a detection limit for the analytical procedures.

The LLDs are specified by the ODCM for radionuclides in specific media and are determined by taking into account the overall measurement methods. The equation used to calculate the LLD is:

$$LLD = \frac{4.66 S_b}{(E)(V) (2.22) (Y) \exp(-\lambda\Delta t)}$$

Where:

LLD = the a priori lower limit of detection, as defined above (in picocuries per unit mass or volume)

S_b = the standard deviation of the background counting rate or of the counting rate of a blank sample, as appropriate (in counts per minute)

E = the counting efficiency (in counts per disintegration)

V = the sample size (in units of mass or volume)

2.22 = the number of disintegrations per minute per picocurie

Y = the fractional radiochemical yield (when applicable)

λ = the radioactive decay constant for the particular radionuclide

Δt = the elapsed time between sample collection (or end of the sample collection period) and time of counting

The ODCM LLD formula assumes that:

1. The counting times for the sample and background are equal
2. The count rate of the background is approximately equal to the count rate of the sample

In the ODCM program, LLDs are used to ensure that minimum acceptable detection capabilities are met with specified statistical confidence levels (95% detection probability with 5% probability of a false negative). Table 3.8-1 lists the ODCM program required LLDs for specific media and radionuclides as specified by the NRC. The LLDs actually achieved are routinely lower than those specified by the ODCM.

3.5 COMPLIANCE WITH REQUIRED LOWER LIMITS OF DETECTION (LLD)

ODCM, Part 1, Table 5.1-3 specifies the detection capabilities for environmental sample analysis (see report Table 3.8-1). ODCM, Part 1, Section 6.1 requires that a discussion of all analyses for which the required LLDs specified were not routinely achieved be included in the Annual Radiological Environmental Operating Report. Section 3.8 is provided pursuant to this requirement.

3.5.1 All sample analyses performed in 2008 as required by the ODCM, achieved the Lower Limit of Detection (LLD) as specified by ODCM, Part 1, Table 5.1-3. See report Table 3.8-1 for required LLD values.

TABLE 3.8-1

REQUIRED DETECTION CAPABILITIES FOR
ENVIRONMENTAL SAMPLE ANALYSIS
LOWER LIMIT OF DETECTION (LLD)

Analysis	Water (pCi/l)	Airborne Particulate or Gases (pCi/m ³)	Fish (pCi/kg, wet)	Milk (pCi/l)	Food Products (pCi/kg, wet)	Sediment (pCi/kg, dry)
Gross Beta	4	0.01				
H-3	3000 (a)					
Mn-54	15		130			
Fe-59	30		260			
Co-58, Co-60	15		130			
Zn-65	30		260			
Zr-95, Nb-95	15					
I-131	15 (a)	0.07		1	60	
Cs-134	15	0.05	130	15	60	150
Cs-137	18	0.06	150	18	80	180
Ba/La-140	15			15		

(a) No drinking water pathway exists at the Nine Mile Point site under normal operating conditions due to the direction and distance of the nearest drinking water intake. Therefore, an LLD value of 3000 pCi/liter is used for H-3 and an LLD value of 15 pCi/liter is used for I-131.

3.6 REGULATORY LIMITS

Two federal agencies, the Nuclear Regulatory Commission and Environmental Protection Agency, have responsibility for regulations promulgated for protecting the public from radiation and radioactivity beyond the site boundary.

3.6.1 The Nuclear Regulatory Commission (NRC):

The NRC, in 10 CFR 20.1301, limits the levels of radiation in unrestricted areas resulting from the possession or use of radioactive materials such that they limit any individual to a dose of:

- less than or equal to 100 mrem per year to the total body

In addition to this dose limit, the NRC has established design objectives for nuclear plant licensees. Conformance to these guidelines ensures that nuclear power reactor effluents are maintained as far below the legal limits as is reasonably achievable.

The NRC; in 10CFR 50, Appendix I, establishes design objectives for the dose to a member of the general public from radioactive material in liquid effluents released to unrestricted areas to be limited to:

- less than or equal to 3 mrem per year to the total body
or
- less than or equal to 10 mrem per year to any organ

The air dose due to release of Noble gases in gaseous effluents is restricted to:

- less than or equal to 10 mrad per year for gamma radiation or
- less than or equal to 20 mrad per year for beta radiation

The dose to a member of the general public from Iodine-131, tritium, and all particulate radionuclides with half-lives greater than 8 days in gaseous effluents is limited to:

- less than or equal to 15 mrem per year to any organ

The NRC, in 10CFR72.104(a), establishes criteria for radioactive materials in effluents and direct radiation from an Independent Spent Fuel Storage Installation (ISFSI).

During normal operations and anticipated occurrences, the annual dose equivalent to any real individual who is located beyond the controlled area must not exceed:

- 25 mrem per year to the total body
- 75 mrem per year to the thyroid
and
- 25 mrem per year to any other organ as a result of :
 1. Planned discharges of radioactive material, radon and its decay products excepted, to the environment
 2. Direct radiation from ISFSI
 3. Any other radiation from fuel cycle operation in the region

3.6.2 Environmental Protection Agency (EPA)

The EPA, in 40CFR190.10, Subpart B, sets forth the environmental standards for the uranium fuel cycle. During normal operation, the annual dose to any member of the public from the entire uranium fuel cycle shall be limited to:

- less than or equal to 25 mrem per year to the total body
- less than or equal to 75 mrem per year to the thyroid
and
- less than or equal to 25 mrem per year to any other organ

4.0 SAMPLE SUMMARY TABLES IN BRANCH TECHNICAL POSITION FORMAT

All sample data is summarized in table form. The tables are titled "Radiological Environmental Monitoring Program Annual Summary" and use the following format as specified in the NRC Branch Technical Position:

Column

1. Sample Medium
2. Type and Number of Analyses Performed
3. Required Lower Limits of Detection (LLD), see Section 3.8, Table 3.8-1. This wording indicates that inclusive data is based on $4.66 S_b$ (sigma) of background (See Section 3.7).
4. The mean and range of the positive measured values of the indicator locations.
5. The mean, range, and location of the highest indicator annual mean. Location designations are keyed to Table 3.3-1 in Section 3.3.
6. The mean and range of the positive measured values of the control locations.
7. The number of non-routine reports sent to the Nuclear Regulatory Commission.

NOTE: Only positive measured values are used in statistical calculations.

TABLE 4.0-1

**RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM ANNUAL SUMMARY
 JAMES A. FITZPATRICK NUCLEAR POWER PLANT DOCKET NO. 50-333
 OSWEGO COUNTY, STATE OF NEW YORK, JANUARY – DECEMBER 2008***

MEDIUM (UNITS)	TYPE AND NUMBER OF ANALYSES*	LLD(a)	INDICATOR LOCATIONS: MEAN (f) / RANGE	LOCATION (b) OF HIGHEST ANNUAL MEAN: LOCATION & MEAN (f) / RANGE	CONTROL LOCATION: MEAN (f) / RANGE	NUMBER OF NON-ROUTINE REPORTS
Shoreline Sediment (pCi/kg-dry)	<u>GSA (4):</u> Cs-134	150	<LLD	<LLD	<LLD	0
	Cs-137	180	<LLD	<LLD	<LLD	0
Fish (pCi/kg-wet)	<u>GSA (18): (h)</u> Mn-54	130	<LLD	<LLD	<LLD	0
	Fe-59	260	<LLD	<LLD	<LLD	0
	Co-58	130	<LLD	<LLD	<LLD	0
	Co-60	130	<LLD	<LLD	<LLD	0
	Zn-65	260	<LLD	<LLD	<LLD	0
	Cs-134	130	<LLD	<LLD	<LLD	0
	Cs-137	150	<LLD	<LLD	<LLD	0

TABLE 4.0-1 (continued)

**RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM ANNUAL SUMMARY
 JAMES A. FITZPATRICK NUCLEAR POWER PLANT DOCKET NO. 50-333
 OSWEGO COUNTY, STATE OF NEW YORK, JANUARY – DECEMBER 2008***

MEDIUM (UNITS)	TYPE AND NUMBER OF ANALYSES*	LLD(a)	INDICATOR LOCATIONS: MEAN (f) / RANGE	LOCATION (b) OF HIGHEST ANNUAL MEAN: LOCATION & MEAN (f) / RANGE	CONTROL LOCATION: MEAN (f) / RANGE	NUMBER OF NON-ROUTINE REPORTS
Surface Water (pCi/liter)	<u>H-3 (8):</u>					
	H-3	3000(c)	<LLD	<LLD	<LLD	0
	<u>GSA (24):</u>					
	Mn-54	15	<LLD	<LLD	<LLD	0
	Fe-59	30	<LLD	<LLD	<LLD	0
	Co-58	15	<LLD	<LLD	<LLD	0
	Co-60	15	<LLD	<LLD	<LLD	0
	Zn-65	30	<LLD	<LLD	<LLD	0
	Zr-95	15	<LLD	<LLD	<LLD	0
	Nb-95	15	<LLD	<LLD	<LLD	0
	I-131	15(c)	<LLD	<LLD	<LLD	0
	Cs-134	15	<LLD	<LLD	<LLD	0
	Cs-137	18	<LLD	<LLD	<LLD	0
Ba/La-140	15	<LLD	<LLD	<LLD	0	

TABLE 4.0-1 (continued)

**RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM ANNUAL SUMMARY
 JAMES A. FITZPATRICK NUCLEAR POWER PLANT DOCKET NO. 50-333
 OSWEGO COUNTY, STATE OF NEW YORK, JANUARY – DECEMBER 2008***

MEDIUM (UNITS)	TYPE AND NUMBER OF ANALYSES*	LLD(a)	INDICATOR LOCATIONS: MEAN (f) / RANGE	LOCATION (b) OF HIGHEST ANNUAL MEAN: LOCATION & MEAN (f) / RANGE	CONTROL LOCATION: MEAN (f) / RANGE	NUMBER OF NON-ROUTINE REPORTS
TLD (mrem per standard month)	Gamma Dose (140)	(d)	<u>4.6 (120/120)</u> (i) 3.1 – 8.8	TLD #85 (g): 0.2 miles at 292° <u>8.2 (4/4)</u> 7.5 – 8.7	<u>4.1 (20/20)</u> (i) 3.3 – 5.1	0
Air Particulates (pCi/m ³)	<u>Gross Beta (260):</u>	0.01	<u>0.016 (212/212)</u> 0.004 – 0.030	R-2 1.1 miles at 107° <u>0.016 (53/53)</u> 0.006 – 0.030	<u>0.015 (53/53)</u> 0.007 – 0.031	0
	<u>I-131 (260):</u>	0.07	<LLD	<LLD	<LLD	0
	<u>GSA (20):</u> Cs-134	0.05	<LLD	<LLD	<LLD	0
	Cs-137	0.06	<LLD	<LLD	<LLD	0
Milk (pCi/liter)	<u>GSA (54): (e) (h)</u> Cs-134	15	<LLD	<LLD	<LLD	0
	Cs-137	18	<LLD	<LLD	<LLD	0
	Ba/La-140	15	<LLD	<LLD	<LLD	0
	<u>I-131 (54):</u>		<LLD	<LLD	<LLD	0
	I-131	1				
Food Products (pCi/kg-wet)	<u>GSA (27): (h)</u> I-131	60	<LLD	<LLD	<LLD	0
	Cs-134	60	<LLD	<LLD	<LLD	0
	Cs-137	80	<LLD	<LLD	<LLD	0

TABLE NOTES:

- * = Data for Table 4.0-1 is based on ODCM required samples only.
- (a) = LLD values as required by the ODCM. LLD units are specified in the medium column.
- (b) = Location is distance in miles and direction in compass degrees based on NMP-2 reactor center-line rounded to the nearest 1/10 mile. Units in this column are specified in medium column.
- (c) = The ODCM specifies an I-131 and tritium LLD value for surface water analysis (non-drinking water) of 15 pCi/liter and 3000 pCi/liter respectively.
- (d) = The ODCM does not specify a particular LLD value to environmental TLDs.
- (e) = The ODCM criteria for indicator milk sample locations include locations within 5.0 miles of the site. There are no milk sample locations within 5.0 miles of the site. Therefore, the only sample location required by the ODCM is the control location. There were two optional locations for 2008.
- (f) = Fraction of number of detectable measurements to total number of measurements. Mean and range results are based on detectable measurements only.
- (g) = This dose is not representative of doses to a member of the public since this area is located near the north shoreline which is in close proximity to the generating facility and is not accessible to members of the public (See Section 5.2.4, TLDs).
- (h) = Data includes results from optional samples in addition to samples required by the ODCM.
- (i) = Indicator-TLD locations are: #7, 15, 18, 23, 56, 58, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97 and 98. Control TLDs are all TLDs located beyond the influence of the site (TLD #: 8, 14, 49, 111, and 113).

5.0 DATA EVALUATION AND DISCUSSION

Introduction

Each year the results of the annual Radiological Environmental Monitoring Program (REMP) are evaluated considering plant operations at the site, the natural processes in the environment, and the archive of historical environmental radiological data. A number of factors are considered in the course of evaluating and interpreting the annual environmental radiological data. This interpretation can be made using several methods including trend analysis, population dose estimates, risk estimates to the general population based on significance of environmental concentrations, effectiveness of plant effluent controls, and specific research areas. The report not only presents the data collected during the 2008 sample program but also assesses the significance of radionuclides detected in the environment. It is important to note that detection of a radionuclide is not, of itself, an indication of environmental significance. Evaluation of the impact of the radionuclide in terms of potential increased dose to man, in relation to natural background, is necessary to determine the true significance of any detection.

Units of Measure

Some of the units of measure used in this report are explained below.

Radioactivity is the number of atoms in a material that decay per unit of time. Each time an atom decays, radiation is emitted. The *curie* (Ci) is the unit used to describe the activity of a material and indicates the rate at which the atoms are decaying. One curie of activity indicates the decay of 37 billion atoms per second.

Smaller units of the curie are used in this report. Two common units are the *microcurie* (uCi), which is one millionth (0.000001) of a curie, and the *picocurie* (pCi), which is one trillionth (0.000000000001) of a curie. The picocurie (pCi) is the unit of radiation that is routinely used in this report. The mass, or weight, of radioactive material that would result in one curie of activity depends on the disintegration rate or half-life. For example, one gram of radium-226 contains one curie of activity, but it would require about 1.5 million grams of natural uranium to equal one curie. Radium-226 is more radioactive than natural uranium on a weight or mass basis.


Dose/Dose to Man

The dose or dose equivalent, simply put, is the amount of ionizing energy deposited or absorbed in living tissue. The amount of energy deposited or ionization caused is dependent on the type of radiation. For example, alpha radiation can cause dense localized ionization that can be up to 20 times the amount of ionization for the same energy imparted as from gamma or x-rays. Therefore, a quality factor must be applied to account for the different ionizing capabilities of various types of radiation. When the quality factor is multiplied by the absorbed dose, the result is the dose equivalent, which is an estimate of the possible biological damage resulting from exposure to any type of ionizing radiation. The dose equivalent is measured in rem (roentgen equivalent man). In terms of environmental radiation, the rem is a large unit. Therefore, a smaller unit, the millirem (mrem) is often used. One millirem (mrem) is equal to 0.001 of a rem.

The term “dose to man” refers to the dose or dose equivalent that is received by members of the general public at or beyond the site boundary. The dose is calculated based on concentrations of radioactive material measured in the environment. The primary pathways that contribute to the dose to man are; the inhalation pathway, the ingestion pathway, and direct radiation.

Discussion

There are three separate groups of radionuclides that were measured in the environment in the media analyzed for the 2008 sampling program. The first of these groups consists of the radionuclides that are naturally occurring. The environment contains a significant inventory of naturally occurring radioactive elements. The components of natural or background radiation include the decay of radioactive elements in the earth’s crust, a steady stream of high-energy particles from space called cosmic radiation, naturally-occurring radioactive isotopes in the human body like potassium-40, medical procedures, man-made phosphate fertilizers (phosphates and uranium are often found together in nature), and household items like televisions. In the United States, a person’s average annual exposure from background radiation is 360 mrem, as illustrated on the following Background Radiation Chart.

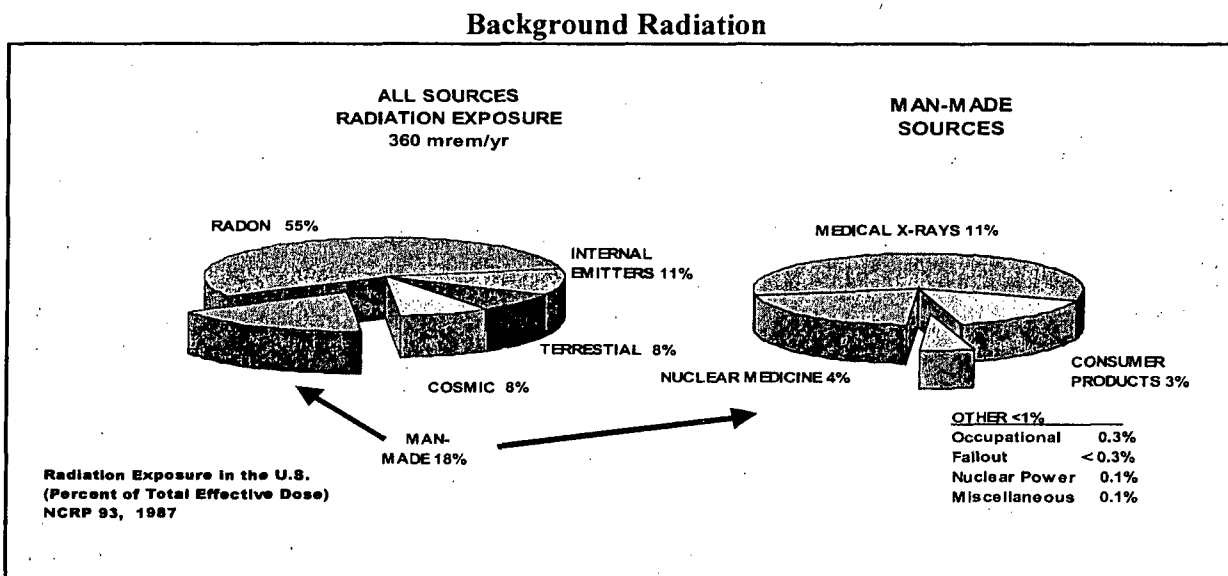

A number of radionuclides are present in the environment due to sources such as cosmic radiation and fallout from nuclear weapons testing. These radionuclides are expected to be present in many of the environmental samples collected in the vicinity of the Nine Mile Point Site. Some of the radionuclides normally present include:

- *Tritium*, present as a result of the interaction of cosmic radiation with the upper atmosphere
- *Beryllium-7*, present as a result of the interaction of cosmic radiation with the upper atmosphere
- *Potassium-40* and *Radium-226*, naturally occurring radionuclides found in the human body and throughout the environment
- *Fallout radionuclides* from nuclear weapons testing, including *Cesium-137*, and *Strontium-90*

Beryllium-7 and potassium-40 are especially common in REMP samples. Since they are naturally occurring and are abundant, positive results for these radionuclides are reported in some cases in Section 6.0 of this report. Comparisons of program samples to natural background radiation are made throughout this section to help put program results into perspective and to aid the reader in determining what, if any, significant impact is demonstrated by the REMP results.

The second group of radionuclides that were detected are a result of the detonation of thermonuclear devices in the earth's atmosphere. Atmospheric nuclear testing during the early 1950's produced a measurable inventory of radionuclides presently found in the lower atmosphere as well as in ecological systems. In 1963 an Atmospheric Test Ban Treaty was signed. Since the treaty, the global inventory of man-made radioactivity in the environment has been greatly reduced through the decay of short lived radionuclides and the removal of radionuclides from the food chain by such natural processes as weathering and sedimentation. This process is referred to in this report as ecological cycling. Since 1963, several atmospheric weapons tests have been conducted by the People's Republic of China and underground weapons testing by India, Pakistan & North Korea. In some cases, the usual radionuclides associated with nuclear detonations were detected for several months following the test, and then after a peak detection period, diminished to a point where most could not be detected. Although reduced in frequency, atmospheric testing continued into the 1980's. The resulting fallout or deposition from these most recent tests has influenced the background radiation in the vicinity of the site and was evident in many of the sample media analyzed over the years. The highest weapons testing concentrations were noted in samples collected for the 1981 REMP. Cs-137 was the major byproduct of this testing and is still occasionally detected in a few select number of environmental media.

The third group of radionuclides that may be detected in the environment are those that are related to nuclear power technology. These radionuclides are the byproduct of the operation of light water reactors. These byproduct radionuclides are the same as those produced in atmospheric weapons testing and found in the Chernobyl fallout. This commonality makes a determination of the source of these radionuclides that may be detected in environmental samples difficult to determine. During 2008, there were no plant-related radionuclides detected in the REMP samples.

A number of factors must be considered in performing radiological sample data evaluation and interpretation. The evaluation is made using several approaches including trend analysis and dose to man. An attempt has been made not only to report the data collected during 2008, but also to assess the significance of the radionuclides detected in the environment as compared to natural and other man-made radiation sources. It is important to note that detected concentrations of radionuclides in the local environment as a result of man's technology are very small and are of no or little significance from an environmental or dose to man perspective.

The 1987 per capita average dose was determined to be 360 mrem per year from all sources, as noted in NCRP Report No. 93 (Reference 14). This average dose includes such exposure sources as natural radiation, occupational exposure, weapons testing, consumer products and nuclear medicine. The 1987 per capita dose rate due to natural sources was 295 mrem per year. The per capita radiation dose from nuclear power production nationwide is less than one mrem per year.

The natural background gamma radiation in the environs of the Nine Mile Point site, resulting from radionuclides in the atmosphere and in the ground, accounts for approximately 60-65 mrem per year. This dose is a result of radionuclides of cosmic origin (for example, Be-7) and of primordial origin (Ra-226, K-40, and Th-232). A dose of 60 mrem per year, as a background dose, is significantly greater than any possible doses as a result of routine operations at the site during 2008.

The results of each sample medium are discussed in detail in Sections 5.1 and 5.2. This includes a summary of the results, the estimated environmental impact, a detailed review of any relevant detections with a dose to man estimate where appropriate, and an analysis of possible long term and short term trends.

During routine implementation of the REMP, additional or optional environmental pathway media are sampled and analyzed. These samples are obtained to:

- Expand the area covered by the program beyond that required by the ODCM
- Provide more comprehensive monitoring than is currently required
- Monitor the secondary dose to main pathways
- Maintain the analytical data base established when the plants began commercial operation

The optional samples that are collected will vary from year to year. In addition to the optional sample media, additional locations are sampled and analyzed for those pathways required by the ODCM. These additional sample locations are obtained to ensure that a variety of environmental pathways are monitored in a comprehensive manner. Data from additional sample locations that are associated with the required ODCM sample media are included in the data presentation and evaluation. When additional locations are included, the use of this data is specifically noted in Sections 5.1 and 5.2.

Section 6.0 contains the analytical results for the sample media addressed in the report. Tables are provided for each required sample medium analyzed during the 2008 program.

Section 7.0, titled Historical Data, contains statistics from previous years' environmental sampling. The process of determining the impact of plant operation on the environment includes the evaluation of past analytical data to determine if trends are changing or developing. As state-of-the-art detection capabilities improve, data comparison is difficult in some cases. For example, Lower Limits of Detections (LLDs) have improved significantly since 1969 due to technological advances in laboratory procedures and analytical equipment.

5.1 AQUATIC PROGRAM

The aquatic program consists of samples collected from three environmental pathways. These pathways are:

- Shoreline Sediment
- Fish
- Surface Waters

Section 6.0, Tables 6-1 through 6-4 present the analytical results for the aquatic samples collected for the 2008 sampling period.

5.1.1 SHORELINE SEDIMENT RESULTS


A. Results Summary

Shoreline sediment samples were obtained in April and October of 2008 at one offsite control location (Lang's Beach located near Oswego Harbor) and at one indicator location (Sunset Bay) which is an area east of the site considered to have recreational value.

A total of four sediment samples were collected for the 2008 sample program, two indicator and two control. These results continue to show a downward trend over the last 10 years. Cs-137 was not detected in samples collected from the Sunset Bay indicator location and the Lang's Beach control location during 2008.

The one naturally-occurring radionuclide detected was K-40 and was not related to plant operations. No other plant-related radionuclides were detected in the 2008 shoreline sediment samples.

The following is a graph of the average Cs-137 concentration in shoreline sediment samples over the previous 15 years. This graph illustrates a general downward trend in the Cs-137 concentrations since 1994.

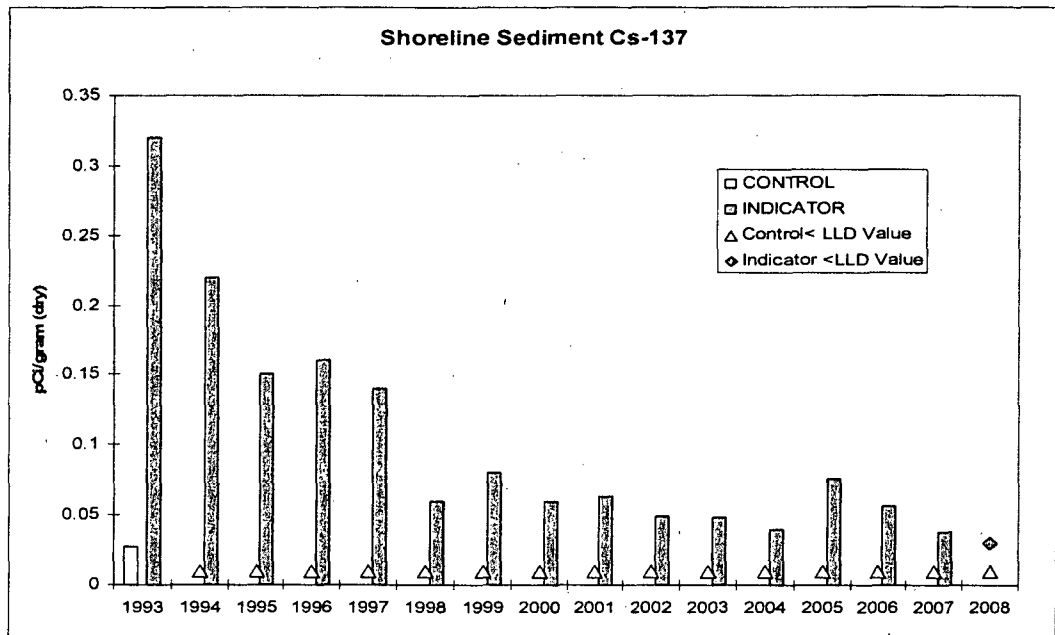

B. Data Evaluation and Discussion

Shoreline sediment samples are routinely collected twice per year from the shoreline of Lake Ontario. Samples are collected from one indicator location (Sunset Bay), and one control location (Lang's Beach). Samples were collected from both the indicator and control locations in April and October 2008. The results of these sample collections are presented in Section 6.0, Table 6-1, "Concentrations of Gamma Emitters in Shoreline Sediment Samples – 2008". Potassium-40 (K-40) was the only significant radionuclide detected in the sediment samples.

C. Dose Evaluation

The calculated potential whole body and skin doses which may result from the measured Cs-137 concentrations in previous years are extremely small and are insignificant when compared to natural background doses.

The radiological impact of Cs-137 measured in the shoreline sediment can be evaluated on the basis of dose to man. In the case of shoreline sediments, the critical pathway is direct radiation to the whole body and skin. Using the parameters provided in Regulatory Guide 1.109, the potential dose to man in mrem per year can be calculated. The following regulatory guide values were used in calculating the dose to man:

- A teenager spends 67 hours per year at the beach area or on the shoreline,
- The sediment has a mass of 40 kg/m² (dry) to a depth of 2.5 cm,
- The shoreline width factor is 0.3, and
- The maximum 2008 LLD concentration of <0.078 pCi/g (dry).

Using these conservative parameters, the potential dose to the maximum exposed individual (teenager) would be 0.00027 mrem/year to the whole body and 0.00031 mrem/year to the skin. This calculated dose is very small and is insignificant when compared to the natural background annual exposure of approximately 60 mrem as measured by control TLDs in the vicinity of the site.

D. Data Trends

Cs-137 was not detected at the indicator and control sample locations for 2008. The mean Cs-137 concentration for the shoreline sediment indicator sample for 2007 was 0.04 pCi/g (dry). This is consistent with mean concentrations measured at the indicator locations over the past ten years.

The previous five years of data show a stable mean concentration values measured at the indicator locations. Over the five year period, mean concentrations ranged from a high of 0.08 pCi/g (dry) in 2005 to a low value of 0.04 pCi/g (dry) measured in 2004 and again in 2007. Cesium-137 was not detected in the control location samples over this same five year period.

The general absence of Cs-137 in the control samples is attributed to the differences in the sediment types between the two sample locations. Few shoreline regions west of the site contain fine sediment and/or sand which would be representative of the indicator location. It is difficult to obtain control samples that are comparable in physical and chemical characteristics to the indicator samples. Other factors, which include changing lake level and shoreline erosion, further complicate attempts at consistency in shoreline sediment sampling. Recent soil samples from locations beyond any expected influence from the site have contained levels of Cs-137 equal to or greater than the concentrations found in the 2007 shoreline sediment samples. The Cs-137 is commonly found in soil samples and is attributed to weapons testing fallout. Shoreline samples containing soil or sediment are likely to contain Cs-137.

The previous ten year data trend for indicator shoreline samples showed a overall downward trend in concentration measured at the indicator sample locations. Over the previous ten year period of 1998 through 2007, mean concentrations at the indicator location ranged from a maximum of 0.08 pCi/g (dry) in 1999 to a minimum of 0.04 pCi/g (dry) measured in 2004 and again in 2007. Cs-137 was not detected at the indicator location for 2008. This continues to support the long term decreasing trend in Cs-137 concentration in shoreline sediment samples. Cesium-137 was not detected in the control samples collected over the previous ten years.

Shoreline sediment sampling at the indicator location commenced in 1985. Prior to 1985, no data was available for long term trend analysis.

Section 7.0, Tables 7-1 and 7-2 illustrate historical environmental data for shoreline sediment samples.

5.1.2 FISH SAMPLE RESULTS

A. Results Summary

A total of 18 fish samples were collected for the 2008 sample program. Species collected were: smallmouth bass, brown trout, and walleye. The analytical results for the 2008 fish samples showed no detectable concentration of radionuclide that would be attributable to plant operations at the site or past atmospheric weapons testing. Since 2003 no Cs-137 has been measured in fish samples. Over the previous 20 years prior to 2003, Cs-137 has been detected at a combination of both the indicator and/or control locations. (Refer to Tables 7-3 and 7-4). These low levels of Cs-137 represented no significant dose to man or impact on the environment.

The 2008 fish sample results demonstrate that plant operations at the Nine Mile Point Site have no measurable radiological environmental impact on the upper levels of the Lake Ontario food chain. The 2008 results are consistent with previous year's results in that they continue to support the general long-term downward trend in fish Cs-137 concentrations over the last 24 years. Cs-137 was not detected in fish samples collected in 2003 to 2008 from indicator locations. The period of 2000 through 2008 as a group are the lowest results measured since the beginning of the Site Environmental Monitoring Program in 1969.

B. Data Evaluation and Discussion

Fish collections were made utilizing gill nets at one location greater than five miles from the site (Oswego Harbor area) and at two locations in the vicinity of the lake discharges for the NMPNS and the JAFNPP facilities. The Oswego Harbor samples served as control samples while the NMPNS and JAFNPP samples served as indicator samples. All samples were analyzed for gamma emitters. Section 6.0, Table 6-2 shows individual results for all the samples collected in 2008 in units of pCi/g (wet).

The spring fish collection was made up of 9 individual samples representing three separate species. Walleye, smallmouth bass, and brown trout were collected.

The total fall fish collection was comprised of 9 individual samples representing three individual species. Walleye, smallmouth bass, and brown trout were collected.


Cs-137 was not detected in any of the fish species collected for the 2008 sample program.

C. Dose Evaluation

Fish represent the highest level in the aquatic food chain and have the potential to be a contributor to the dose to man from the operations at the site. The lack of detectable concentrations of plant-related radionuclides in the 2008 fish samples demonstrates that there is no attributable dose to man from operations at the site through the aquatic pathway. Some Lake Ontario fish species may be considered an important food source due to the local sport fishing industry. Therefore, these fish are an integral part of the human food chain.


D. Data Trends

The Cs-137 data for fish samples over the previous five years (2003 through 2007) show that the number of positive detections has decreased over this period relative to historical data. There were no positive detections of Cs-137 over the previous five year period at the indicator locations. The graph below illustrates the mean control and indicator Cs-137 concentrations for 2008 and the previous fourteen years.

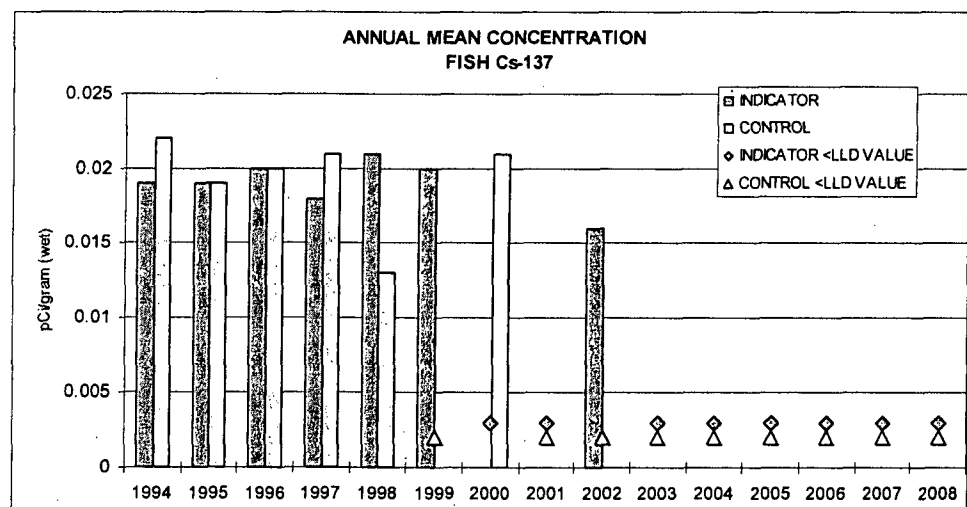

The fifteen year data trend shows a consistent level of Cs-137 measured in fish between 1995 and 1998. After 1998, the number of positive detections drops off as noted in the five year trend. The 1995 through 2008 results, as a group, are the lowest Cs-137 concentrations measured over the existence of the sample program.

The general long-term decreasing trend for Cs-137, illustrated in the graph below, is most probably a result of the cesium becoming unavailable to the ecosystem due to ion exchange with soils and sediments and radiological decay. The concentrations of Cs-137 detected in fish since 1976 are considered to be the result of weapons testing fallout. The general downward trend in concentrations will continue as a function of additional ecological cycling and radiological decay.

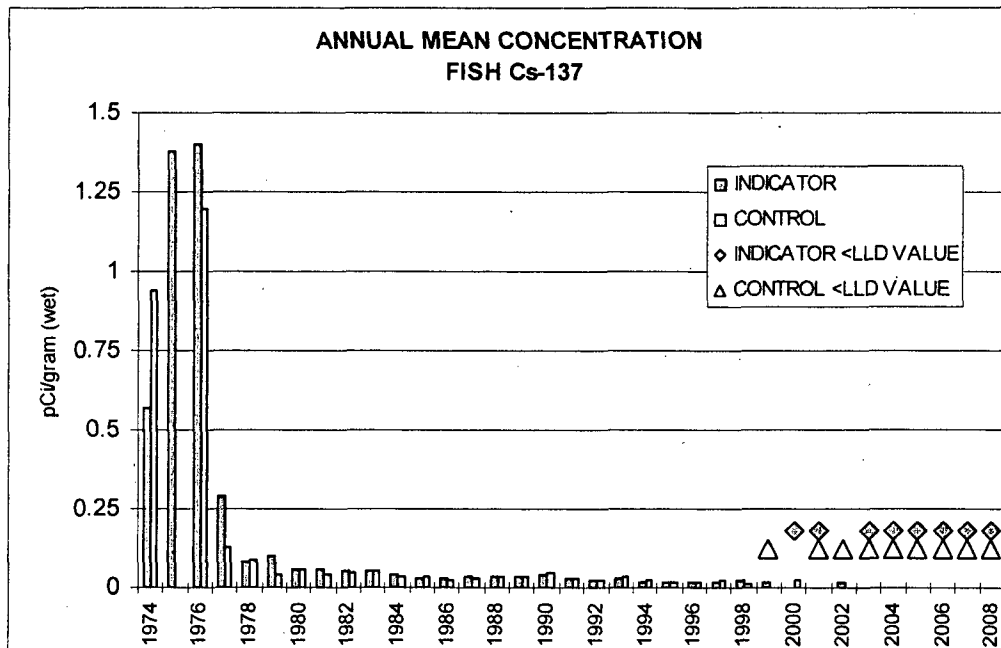

Section 7.0, Tables 7-3 and 7-4 show historical environmental sample data for fish.

5.1.3 SURFACE WATER (LAKE)

A. Results Summary

The ODCM requires that monthly surface water samples be taken from the respective inlet water supplies of the JAFNPP and NRG Energy's Oswego Steam Station. In conjunction with the required samples, three additional Lake Ontario surface water locations are sampled and analyzed. These additional locations are the Oswego City Water Intake, the NMP1 Intake and the NMP2 Intake. Gamma spectral analysis was performed on 24 monthly composite samples from the ODCM locations and on 36 monthly composite samples collected from the additional sample locations. The results of the gamma spectral analyses showed that only naturally-occurring radionuclides were detected in the 60 samples from the five locations collected for the 2008 Sampling Program. The two naturally-occurring radionuclides detected were K-40 and Ra-226 and were not related to plant operations. Monthly composite samples showed no presence of plant-related gamma emitting isotopes in the waters of Lake Ontario as a result of plant operations.

The monthly surface water samples are composited on a quarterly basis and are analyzed for tritium. A total of 20 samples were analyzed for tritium as part of the 2008 REMP program. The results for the 2008 samples showed no positive detections of tritium. All results for 2008 were below the established measurement sensitivity and are reported as less than the lower limit of detection (<LLD). There is no indication of a long-term buildup of tritium concentrations in the surface waters adjacent to the site.

B. Data Evaluation and Discussion

Gamma spectral analysis was performed on monthly composite samples from five Lake Ontario sampling locations. No plant-related radionuclides were detected in 2008 samples. This is consistent with historical data, which has not shown the presence of plant-related radionuclides in surface water samples.

Tritium samples are quarterly samples that are a composite of the applicable monthly samples for a given location. Tritium samples analyzed for the 2008 sample program were analyzed to an instrument detection level of 500 pCi/l.

The tritium results for the JAFNPP inlet canal samples contained no positive detections. The 2008 results had LLD values that ranged from <424 pCi/l to <450 pCi/l. The ODCM Control location (Oswego Steam Station inlet canal) results showed no positive detections and the sample results had LLD values in the range of <424 pCi/l to <450 pCi/l.

Tritium was not detected in any of the twelve optional Lake Ontario samples collected in 2008. The Oswego City Water inlet is sampled to monitor drinking water quality and is representative of a control location due to its distance from the site. The city water inlet is located 7.8 miles west of the site in an “upstream” direction based on the current patterns in the lake.

No positive detections of tritium were identified in 2008. The following is a summary of LLD results for the 2008 sample program:

Sample Location	Tritium Concentration pCi/liter		
	Minimum	Maximum	Mean (Annual)
JAF Inlet (Indicator)*	<424	<450	<435
Oswego Steam Inlet (Control)*	<424	<450	<435
NMP #1 Inlet	<424	<450	<435
NMP #2 Inlet	<424	<450	<435
Oswego City Water Supply	<424	<450	<435

* Sample location required by ODCM

The above LLD values are below the ODCM required LLD value of 3000 pCi/l.

Analytical results for surface water samples are found in Section 6.0, Tables 6-3 through 6-4.

C. Dose Evaluation


The radiological impact to members of the public from low levels of tritium in water is insignificant. This can be illustrated by calculating a dose to the whole body and maximum organ using the maximum LLD value and Regulatory Guide 1.109 methodology. Based on a water ingestion rate of 510 liters/yr and the maximum 2008 LLD concentration of <450 pCi/l, the calculated dose would be less than 0.047 mrem to the child whole body and less than 0.047 mrem to the child liver (critical age group/organ).

D. Data Trends

There are no data trends for gamma emitters such as Cs-137 and Co-60 as historically these radionuclides have not been detected in lake water samples.

Tritium results for the 2008 lake water samples were consistent with results from the previous five years for both the indicator and control locations. The mean measured tritium concentrations for the previous five year period of 2003 – 2007 were less than the LLD for the indicator and the control location. The mean 2008 tritium concentrations were <435 pCi/l for the control and indicator locations. The previous five year data indicates no significant trends in either the indicator or the control mean concentrations. This previous five year data set is consistent with long term tritium results measured at the site. The indicator data from the previous ten year period, 1998 through 2007, are representative of natural variations in environmental tritium concentrations with no significant levels of tritium measured. The 1999 mean control value of 365 pCi/l is the highest concentration measured since 1987 and is within the variability of results measured over the life of the program. The ten year historical results are consistent between the control and indicator locations with no large variation in the measured results.

The following graph illustrates the concentrations of tritium measured in Lake Ontario over the previous 20 years at both an indicator and control location. Prior to 1985, the Oswego City Water Supply results were used as control location data as this location closely approximates the Oswego Steam Station, the current control location. There is no existing preoperational data for comparison to recent data.

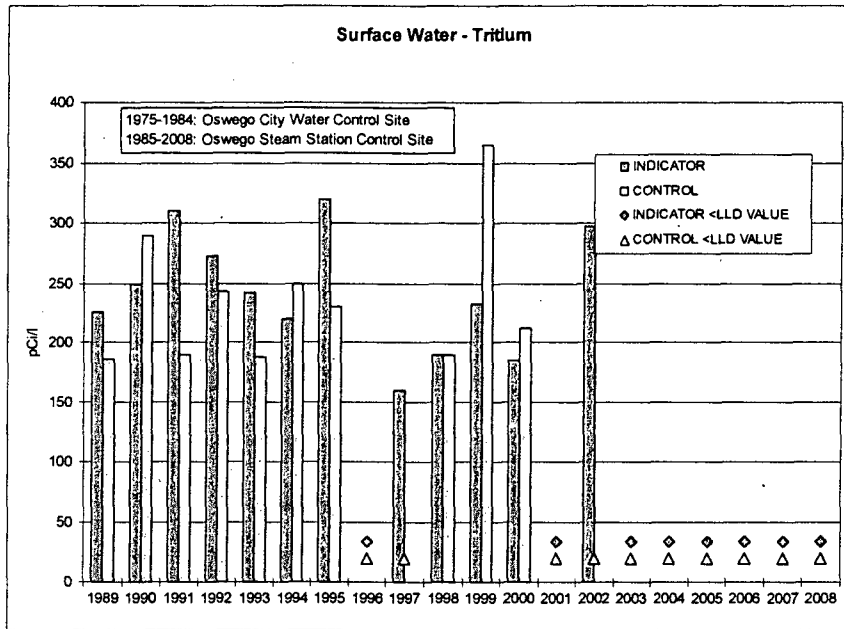

Historical data for Surface Water Tritium is presented in Section 7.0, Tables 7-7 and 7-8.

5.2 TERRESTRIAL PROGRAM

The terrestrial program consists of samples collected from four environmental pathways. These pathways are:

- Airborne particulate and radioiodine,
- Direct Radiation,
- Milk, and
- Food Products

Section 6.0, Tables 6-5 through 6-12 present the analytical results for the terrestrial samples collected for the 2008 reporting period.

5.2.1 AIR PARTICULATE GROSS BETA

A. Results Summary

Weekly air samples were collected and analyzed for particulate gross beta activity. For the 2008 program, a total of 53 samples were collected from control location R-5 and 212 samples were collected from indicator locations R-1, R-2, R-3, and R-4. These five locations are required by the ODCM. Additional air sampling locations are maintained and are discussed in Section 5.2.1.B below. The mean gross beta concentration for samples collected from the control location (R-5) in 2008 was 0.015 pCi/m³. The mean gross beta concentration for the samples collected from the indicator locations (R-1, R-2, R-3, and R-4) in 2008 was 0.016 pCi/m³. The consistency between the indicator and

control mean values, demonstrates that there are no increased airborne radioactivity levels in the general vicinity of the site. The indicator results are consistent with concentrations measured over the last fifteen years. This consistency demonstrates that the natural baseline gross beta activity has been reached. The man-made radionuclide contribution to the natural background from atmospheric weapons testing and Chernobyl can no longer be detected above the background concentrations of naturally occurring beta emitting radionuclides.

B. Data Evaluation and Discussion

The air monitoring system consists of fifteen sample locations, six onsite and nine offsite. Each location is sampled weekly for particulate gross beta activity. A total of 780 samples were collected and analyzed as part of the 2008 program. Five of the nine offsite locations are required by the ODCM. These locations are designated as R-1, R-2, R-3, R-4, and R-5. R-5 is a control location required by the ODCM and is located beyond any local influence from the site. In addition, optional offsite and onsite air sample locations are maintained from which weekly samples are collected. The optional offsite locations are designated as D-2, E, F and G. The optional onsite locations are designated as D-1, G, H, I, J and K.

Gross beta analysis requires that the samples be counted no sooner than 24 hours after collection. This allows for the decay of short half-life naturally-occurring radionuclides, thereby increasing the sensitivity of the analysis for plant-related radionuclides.



Section 6.0, Tables 6-5 and 6-6 present the weekly gross beta activity results for samples collected from the offsite and onsite locations.

The mean annual gross beta indicator concentrations for the ODCM indicator stations (R-1, R-2, R-3 and R-4) was 0.016 pCi/m³. The offsite ODCM control station (R-5) annual mean gross beta concentration was 0.015 pCi/m³. The minimum, maximum and average gross beta results for sample locations required by the ODCM were as follows:

Location	Concentration pCi/m ³		
	Minimum	Maximum	Mean
R-1	0.007	0.026	0.016
R-2	0.006	0.030	0.016
R-3	0.007	0.025	0.015
R-4	0.004	0.026	0.016
R-5 (control)	0.007	0.031	0.015

R1 – R4 Indicator Stations	Min	0.004
	Max	0.030
	Mean	0.016

The mean weekly gross beta concentrations measured in 2008 are illustrated in the following graphs:

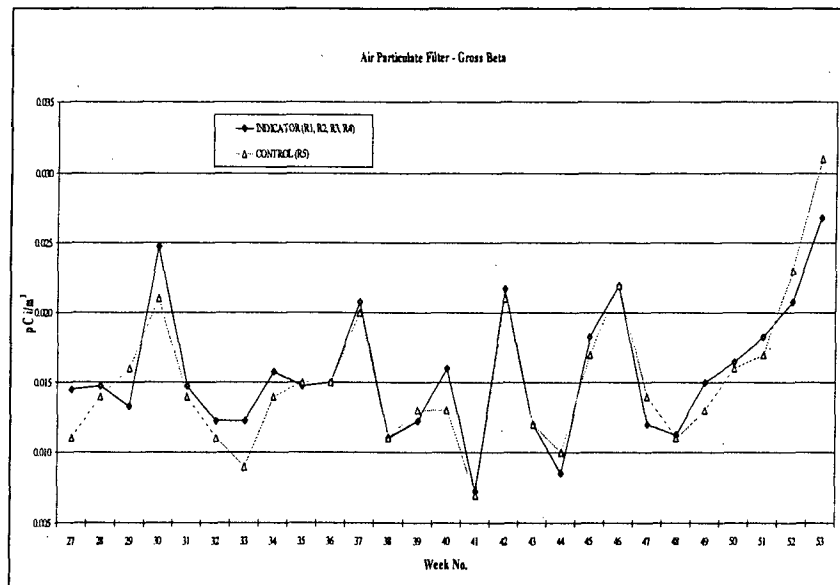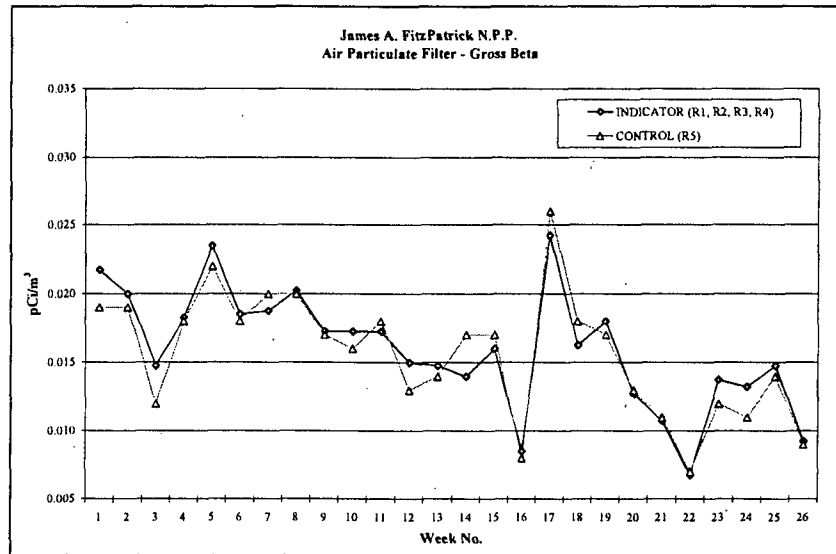

The fluctuations observed in the gross beta activity over the year can be attributed to changes in the environment, especially seasonal changes. The concentrations of naturally-occurring radionuclides in the lower levels of the atmosphere directly above the land are affected by time-related processes such as wind direction, precipitation, snow cover, soil temperature and soil moisture content.


C. Dose Evaluation

Dose calculations are not performed based on gross beta concentrations. Dose to man as a result of radioactivity in air is calculated using the specific radionuclide and the associated dose factor. See Section 5.2.2.C for dose calculations from air concentrations. The dose received by man from air gross beta concentration is a component of the natural background.


D. Data Trends

With the exception of the 1986 sample data, which was affected by the Chernobyl accident, the general trend in air particulate gross beta activity has been one of decreasing activity since 1981, when the mean control value was 0.165 pCi/m³. The 1981 samples were affected by fallout from a Chinese atmospheric nuclear test which was carried out in 1980.

The mean gross beta concentration measured in 1987 to 2008 are illustrated in the following graph:

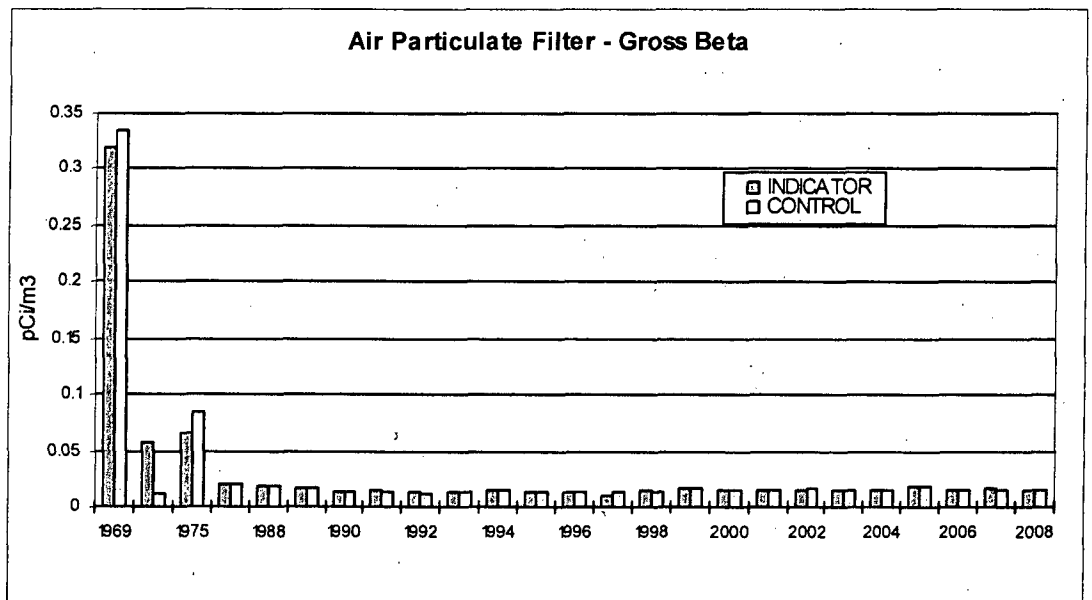

The trend for the previous five years represents a base line concentration or natural background level for gross beta concentrations. This trend is stable with minor fluctuations due to natural variations. The change in concentrations over the period of 1997 through 2008 is very small. This is illustrated by the following graph.

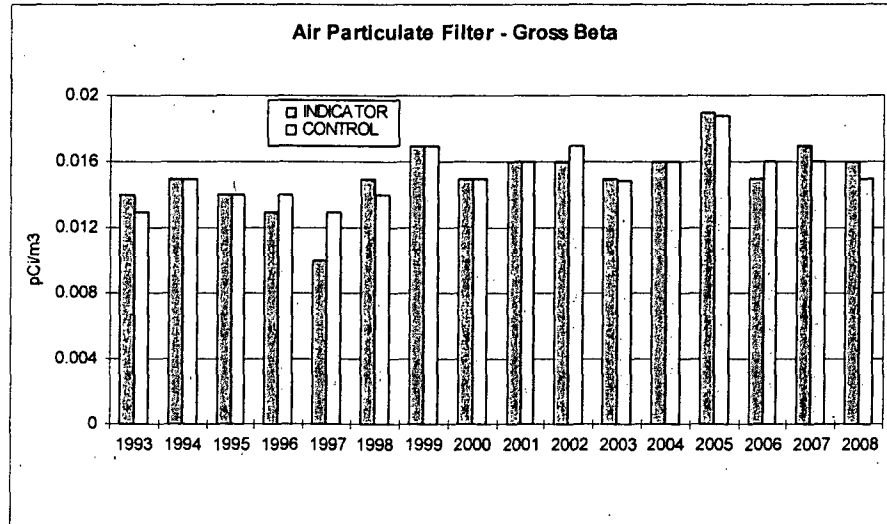

For the operational period of 1997 to 2008, the mean annual gross beta concentration at the control station (R-5) has remained steady with a narrow range of 0.013 pCi/m³ to 0.019 pCi/m³. The mean annual concentrations for the indicator stations for this same time period were similar to the control and ranged from a minimum of 0.010 pCi/m³ in 1997 to a maximum mean of 0.019 pCi/m³ in 2005.

Historical data of air particulate gross beta activity are presented in Section 7.0, Tables 7-9 and 7-10.

5.2.2 MONTHLY PARTICULATE COMPOSITES (GAMMA EMITTERS)

A. Results Summary

Fifteen air monitoring stations are maintained around the Nine Mile Point Site. Five of the 15 air monitoring stations are required by the ODCM and are located offsite near the site boundary and offsite as a control location. Ten additional air sampling stations are also maintained as part of the sampling program. Together, these fifteen continuous air sampling stations make up a comprehensive environmental monitoring network for measuring radioactive air particulate concentrations in the environs of the site. Annually, the air monitoring stations provide 780 individual air particulate samples which are assembled by location into 60 quarterly composite samples. The quarterly composites are analyzed using gamma spectroscopy.

No plant-related gamma emitting radionuclides were detected in any of the air particulate filter samples collected during 2008.

The gamma analysis results for the quarterly composite samples routinely showed positive detections of Be-7, K-40, and Ra-226. Each of these radionuclides is naturally occurring.

B. Data Evaluation Discussion

A total of fifteen air sampling stations are in continuous operation and located both onsite and in the offsite sectors surrounding the Nine Mile Point Site. Five of the fifteen monitoring stations are required by the ODCM and the remaining ten are optional to provide an effective monitoring network. Composite air filter samples are assembled for each of the fifteen sampling locations. Each of the weekly air particulate filters collected for the quarter is assembled by location to form quarterly composite samples. The quarterly composite samples required by the ODCM are composite samples assembled for R-1, R-2, R-3, R-4 and R-5. Other sample locations not required by the ODCM, for which analytical results have been provided, include six onsite locations and four offsite locations. The analytical results for the 60 air particulate filter composites in 2008 showed no detectable activity of plant related radionuclides.

The results of the quarterly composite samples are presented in Section 6.0, Table 6-7.

C. Dose Evaluation

The calculated dose as a result of plant effluents is not evaluated due to the fact that no plant related radionuclides were detected in 2008. The monthly air particulate sampling program demonstrated no offsite dose to man from this pathway as a result of operations of the plants located at the Nine Mile Point Site(NMP).

D. Data Trends

No plant related radionuclides were detected during 2008 at the offsite air monitoring locations.

The ten year database of air particulate composite analysis shows that there is no buildup or routine presence of plant related radionuclides in particulate form in the atmosphere around the site. Historically Co-60 was detected in each of the years from 1977 through 1984 at both the indicator and control locations, with the exception of 1980 when Co-60 was not detected at the control location. The presence of Co-60 in the air samples collected during these years was the result of atmospheric weapons testing. Co-60 was again detected in an offsite 2000 indicator sample and was the only positive detection of Co-60 since 1984. The detection of Co-60 in the one 2000 sample was an isolated event associated with effluents from the NMP1 facility. There have been no subsequent measurable concentrations of Co-60 in the environment surrounding the NMP site.

Historical data shows that Cs-137 is the fission product radionuclide most frequently detected in the air particulate filter composites. Cs-137 was detected in each of the years from 1977 through 1983 at both the control and indicator sampling locations. The presence of Cs-137 in the air samples collected during these years was the result of atmospheric weapons testing. Cs-137 was again detected in 1986 as a result of the Chernobyl accident. Since 1986 there have been no detections of Cs-137 in the environment surrounding the NMP site.

After 1986, no plant related or fallout radionuclides were detected in any of the offsite air particulate composite samples with the exception of the isolated detection of Co-60 in 2000 in a single sample. A review of the past five year's data for air particulate filter composites indicates no plant related radiological impact on the environment. All previous historical positive detections of fission product radionuclides were associated with atmospheric weapons testing or the Chernobyl accident, with the exception of the 2000 detection noted above.

Historical data for air particulate results are presented in Section 7.0, Tables 7-11 and 7-12.

5.2.3 AIRBORNE RADIOIODINE (I-131)

A. Results Summary

Iodine-131 (I-131) was not detected in any of the 780 samples analyzed for the 2008 program. No radioiodine (I-131) has been measured offsite at the constant air monitoring stations since 1987.

B. Data Evaluation and Discussion

Airborne radioiodine (I-131) is monitored at the fifteen air sampling stations also used to collect air particulate samples. There are nine offsite locations, five of which are required by the ODCM. The offsite locations required by the ODCM are designated as R-1, R-2, R-3, R-4 and R-5. R-5 is a control station located beyond any local influence from the plant. Ten air sampling locations are also maintained in addition to those required by the ODCM. Six of these stations D-1, G, H, I, J and K are located onsite. D-2, E, F and G are the optional stations located offsite. Samples are collected using activated charcoal cartridges. They are analyzed weekly for I-131.

The analytical data for radioiodine are presented in Section 6.0, Tables 6-7 and 6-8.

C. Dose Evaluation

The calculated dose as a result of I-131 was not evaluated due to the fact I-131 was not detected during 2008. The I-131 sampling program demonstrated no offsite dose to man from this pathway as a result of operation of the plants located at Nine Mile Point.

D. Data Trends

No radioiodine has been detected in samples collected from the air sampling locations required by the ODCM since 1987.

There has been no positive detection of I-131 in air samples collected over the last ten years. This demonstrates that there is no measurable environmental impact or positive trend for iodine buildup due to plant operations during the period from 1997 through 2008. I-131 has previously been detected in samples collected in 1986 and 1987. The 1986 detection of I-131 was the result of the Chernobyl accident and the 1987 detection was the result of plant operations.

I-131 has been detected in the past at control locations. Control samples collected during 1976 had a mean I-131 concentration of 0.60 pCi/m³. During 1977 this mean decreased to 0.32 pCi/m³, and further decreased by a factor of ten to 0.03 pCi/m³ in 1978. I-131 was not detected in samples collected from the control location during 1979 – 1981 and 1983 to 1985. I-131 was detected once at the control location during 1982 at a concentration of 0.039 pCi/m³.

Iodine-131 has been detected in samples collected from the onsite indicator locations during 1980 to 1983 and 1986 to 1987. The mean concentrations ranged from 0.013 pCi/m³ in 1980 to a maximum of 0.119 pCi/m³ in 1986. The maximum mean indicator I-131 concentration of 0.119 pCi/m³ was the result of the Chernobyl accident. I-131 was detected in a total of 75 weekly samples collected during the 1986 sample program. The 1986 measured concentrations ranged from a minimum of 0.023 pCi/m³ to a maximum of 0.36 pCi/m³. Each positive detection of I-131 in samples collected in 1986 was the direct result of the Chernobyl Nuclear accident.

Historical data for I-131 are presented in Section 7.0, Tables 7-13 and 7-14.

5.2.4 DIRECT RADIATION THERMOLUMINESCENT DOSIMETERS (TLD)

A. Results Summary

Thermoluminescent dosimeters (TLDs) are used to measure direct radiation (gamma dose) in the environment. As part of the 2008 environmental monitoring program, TLDs were placed at a total of 72 different environmental TLD locations (32 required by the ODCM and 40 optional locations). These TLDs were placed, collected and read each quarter of 2008. As a result of placing two TLDs at each location, the results presented in this report are the average of two TLD readings obtained for a given location.

The TLDs were placed in the following five geographical locations around the site boundary:

- Onsite (areas within the site boundary, includes TLD #s 3, 4, 5, 6, 7, 23, 24, 25, 26; TLD #s 18, 27, 28, 29, 30, 31, 39, 47, 103, 106, 107 are excluded)
- Site Boundary (area of the site boundary in each of the 16 meteorological sectors: Only includes TLD results that are not affected by radwaste direct shine, includes TLD #s 7, 18, 78, 79, 80, 81, 82, 83, 84; TLD #s: 23, 75, 76, 77, 85, 86, 87 are excluded)
- Offsite Sector (area four to five miles from the site in each of the eight land based meteorological sectors, includes TLD #s: 88, 89, 90, 91, 92, 93, 94, 95)
- Special Interest (areas of high population density, includes TLD #s 15, 56, 58, 96, 97, 98)
- Control (areas beyond significant influence of the site, includes TLD #s 8, 14, 49)

All geographical locations are required by the ODCM with the exception of the Onsite area which was optional. Description of the five geographical categories and the designation of specific TLD locations that make up each category is presented in Section 3.1.5, TLD (Direct Radiation) of this report.

A summary of the 2008 dose rates for each of the five geographical locations is as follows:

Geographic Category	Dose in mrem per standard month		
	Min	Max	Mean
Onsite (Optional)	3.2	13.8	5.2
Site Boundary (Inner Ring) *	3.2	4.8	4.0
Offsite Sectors (Outer Ring) *	3.2	4.5	3.8
Special Interest *	3.1	4.6	3.9
Control *	3.3	5.1	4.3

* Geographical locations required by the ODCM

Comparison of annual mean dose rates associated with each geographical location indicate that there is no statistical difference in annual dose as a function of distance from the site boundary. The measured annual dose rate at the nearest resident to the site was consistent with the dose rates measured at the site boundary and control locations. The results for the Site Boundary, Offsite Sectors and Special Interest (Offsite) were well within expected normal variation when compared to the Control TLD results.

The results for the 2008 environmental TLD monitoring program indicate that there was no significant increase in dose rates as a result of operations at the site. The Hydrogen Water Chemistry system and the Independent Spent Fuel Storage Installation (ISFSI) in use at the Fitzpatrick plant did not measurably increase the ambient radiation exposure rate beyond the site boundary.

B. Data Evaluation and Discussion

Direct Radiation (Gamma Dose) measurements were taken at 72 different environmental locations during 2008, 32 of which are required by the ODCM. These locations are grouped into five geographical location categories for evaluation of results. The five categories include: Onsite, Site Boundary, Offsite Sector, Special Interest and Control locations. All categories are required by the ODCM with the exception of the Onsite TLDs. Onsite TLDs are placed at various locations within the site boundary to provide additional information on direct radiation levels at and around the NMP1, NMP2 and JAFNPP facilities.

Onsite TLD results ranged from 3.2 to 13.8 mrem per standard month in 2008. This range includes TLDs that are located near NMP1, NMP2 and JAFNPP generating facilities including those in close proximity to the Radwaste buildings of NMP1, NMP2 and JAFNPP.

Site Boundary TLD results ranged from 3.2 to 8.8 mrem per standard month in 2008. This range included all TLDs placed in each of the 16 meteorological sectors in the general area of the site boundary. The highest dose rate measured at a location required by the ODCM was 8.8 mrem per standard month. This TLD, (TLD 87) represents the site boundary maximum dose and is located in the NNW sector along the lake shore in close proximity to the NMP 2 plant. The TLD locations along the lakeshore close to the plants (TLD #s 12, 75, 76, 77, 85, 86 and 87) are influenced by radwaste buildings and radwaste shipping activities. These locations and are not accessible to members of the public and the TLD results for these areas are not representative of dose rates measured at the remaining site boundary locations. The remaining Site Boundary TLD locations, which are located away from the plant ranged from 3.2 to 4.8 mrem per standard month resulting in an average dose rate of 4.0 mrem per standard month.

Offsite Sector TLDs, required by the ODCM, located 4 to 5 miles from the site in each of the 8 land based meteorological sectors ranged from 3.2 to 4.5 mrem per standard month with an average dose rate of 4.2 mrem per standard month.

Special Interest TLDs from all locations ranged from 3.1 to 4.6 mrem per standard month with a 2008 annual average dose rate of 3.9 mrem per standard month.

The Control TLD group required by the ODCM utilizes locations positioned well beyond the site. 2008 Control TLD results ranged from 3.3 to 5.1 mrem per standard month with an annual average dose rate of 4.3 mrem per standard month. These results include both the ODCM required control TLDs and the additional control TLDs.

TLD analysis results are presented in Section 6.0, Table 6-10.

C. Dose Evaluation

2008 annual mean dose rates for each geographic location required by the ODCM (excluding TLD #s 23, 75, 76, 77, 85, 86, 87) are as follows:

Site Boundary: 4.0 mrem per standard month (TLD #s: 7, 18, 78, 79, 80, 81, 82, 83, 84)

Offsite Sectors: 3.8 mrem per standard month (TLD #s: 88, 89, 90, 91, 92, 93, 94, 95)

Special Interest: 3.9 mrem per standard month (TLD #s: 15, 56, 58, 96, 97, 98)

Control: 4.3 mrem per standard month (TLD #s 8, 14, 49)


The measured mean dose rate in the proximity of the closest resident was 4.1 mrem per standard month (TLD #s: 108, 109) which is consistent with the control measurements of 4.1 mrem per standard month.

The mean annual dose for each of the geographic location categories demonstrates that there is no statistical difference in the annual dose as a function of distance from the site. The TLD program verifies that operations at the site do not measurably contribute to the levels of direct radiation present in the offsite environment.

D. Data Trends

A comparison of historical TLD results can be made using the different geographical categories of measurement locations. These include Site Boundary TLDs located in each of the 16 meteorological sectors, TLDs located offsite in each land based sector at a distance of 4 to 5 miles from the site, TLDs located at special interest areas and TLDs located at control locations. Site Boundary, Offsite Sector and Special Interest TLD locations became effective in 1985; therefore, trends for these results can only be evaluated from 1985 to the present.

The following graph illustrates TLD results for the Control, Site Boundary, Offsite Sectors and Special Interest groups from 1993 through 2008:

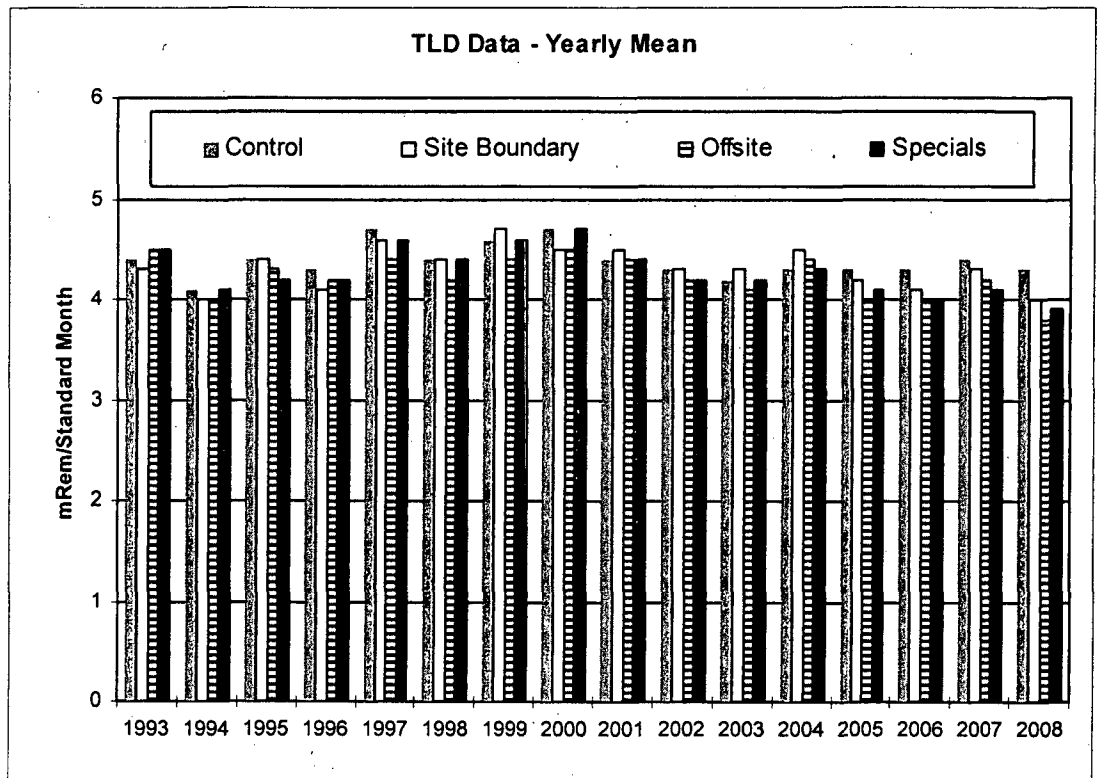

TLDs located at the site boundary averaged 4.0 mrem per standard month during 2008 (Site Boundary average results do not include TLDs influenced by radwaste buildings and radwaste shipping activities: TLDs 23, 75, 76, 77, 85, 86, 87). This result is consistent with the previous five year average of 4.3 mrem per standard month.

Offsite Sector TLDs averaged 3.8 mrem per standard month during 2008. This result is also consistent with the previous five year average of 4.1 mrem per standard month for offsite sectors.

Special Interest TLD locations averaged 3.9 mrem per standard month during 2008 which is consistent with the previous five year average of 4.2 mrem per standard month.

The last group of TLD locations required by the ODCM is the Control Group. This group utilized TLD locations positioned well beyond the site. 2008 control results from all Control TLDs averaged 4.3 mrem per standard month, consistent with the previous five year average of 4.2 mrem per standard month. The 2008 TLD program results, when compared to the previous ten years, showed no significant trends relative to increased dose rates in the environment.

5.2.5 MILK

A. Results Summary

A total of 54 milk samples were collected during the 2008 program and analyzed for gamma emitting radionuclides using gamma spectroscopy. In addition, each sample undergoes an iodine extraction procedure to determine the presence of Iodine-131 (I-131).

I-131, a possible plant related radionuclide, is measured to evaluate the cow/milk dose pathway to man. I-131 was not detected in any of the 54 milk samples collected in 2008 from the four milk sample locations.

Gamma spectral analyses of the milk samples showed only naturally occurring radionuclides, such as K-40, were detected in milk samples collected during 2008. K-40 was detected in all indicator and control samples. K-40 is a naturally occurring radionuclide and is found in many environmental sample media.

The 2008 results demonstrate that routine operations of the Nine Mile Point Site resulted in no measurable contribution to the "dose to the public" from the cow/milk pathway.

B. Sampling Overview

Milk samples were collected from two indicator locations and one control location. The ODCM requires that three sample locations be within five miles of the site. Based on the milk animal census, there were no adequate milk sample locations within five miles of the site in 2008. Samples were collected from three farms located beyond the five-mile requirement to ensure the continued monitoring of this important pathway. The two indicator locations ranged from 6.3 to 8.7 miles from the site. The control samples were collected from a farm located 16.0 miles from the site and in a low frequency wind sector (upwind). The geographic location of each sample location is listed below:

Location No.	Direction From Site	Distance (Miles)
76	SE	6.3
55	E	8.7
77 (Control)	SSW	16.0

Indicator locations #55, #76 and Control location #77 were sampled from April through December. Sampling occurs during the first and second half of each month. Samples were not required to be collected during January through March of 2008 as a result of I-131 not having been detected in samples collected during November and December of 2007, as stipulated in the ODCM.

C. Data Evaluation and Discussion

Each milk sample is analyzed for gamma emitters using gamma spectral analysis. The I-131 analysis is performed using resin extraction followed by spectral analysis for each sample. I-131 and gamma analysis results for milk samples collected during 2008 are provided in Section 6.0, Table 6-11.

Iodine-131 was not detected in any indicator or control milk samples analyzed during 2008. All I-131 milk results were reported as Lower Limits of Detection (LLD). No plant-related radionuclides were detected in any milk sample collected in 2008. K-40 was the most abundant radionuclide detected, and found in every indicator and control sample collected. K-40 is a naturally-occurring radionuclide and is found in many of the environmental media samples. Cs-137 was not detected in any indicator or control milk sample collected in 2008.

D. Dose Evaluation

The calculated dose as a result of plant effluents is not evaluated due to the fact that no plant related radionuclides were detected.

The dose to man from naturally occurring concentrations of K-40 in milk and other environmental media can be calculated. This calculation illustrates that the dose received due to exposure from plant effluents is negligible compared to the dose received from naturally occurring radionuclides. Significant levels of K-40 have been measured in environmental samples. A 70 kilogram (154 pound) adult contains approximately 0.1 microcuries of K-40 as a result of normal life functions (inhalation, consumption, etc.). The dose to bone tissue is about 20 mrem per year as a result of internal deposition of naturally-occurring K-40.

E. Data Trends

Manmade radionuclides are not routinely detected in milk samples. In the past twenty years, Cs-137 was only detected in 1986, 1987, and 1988. The mean Cs-137 indicator activities for those years were 8.6, 6.8 and 10.0 pCi/liter, respectively. I-131 was measured in two milk samples collected in 1997 from a single sample location, having a mean concentration of 0.50 pCi/liter and was of undetermined origin. The previous detection was in 1986 with a mean concentration of 13.6 pCi/liter. The 1986 activity was a result of the Chernobyl accident.

The comparison of 2008 data to historical results over the operating life of the plants shows that Cs-137 and I-131 levels have decreased significantly since 1988.

Historical data of milk sample results for Cs-137 and I-131 are presented in Section 7.0, Tables 7-21 and 7-22.

5.2.6 FOOD PRODUCTS (VEGETATION)

A. Results Summary

There were no plant-related radionuclides detected in the 27 food product samples collected and analyzed for the 2008 program.

Detectable levels of naturally occurring K-40 were measured in all control and indicator samples collected for the 2008 program. Be-7 a naturally-occurring radionuclide, was also detected intermittently in samples collected in 2008. These results are consistent with the levels measured in 2006 and previous years.

The results of the 2008 sampling program demonstrate that there is no measurable impact on the dose to the public from the garden pathway as a result of plant operations.

B. Data Analysis and Discussion

Food product samples were collected from five indicator locations and one control location. The indicator locations are represented by nearby gardens in areas of highest D/Q (deposition factor) values based on historical meteorology and an annual garden census. The control location was a garden 15 miles away in a predominately upwind direction.

Food product samples collected during 2008 did not include any varieties considered to be an edible broadleaf vegetables. Non-edible vegetation consisting of squash leaves, zucchini leaves, rhubarb, grape leaves, pumpkin leaves, corn leaves, horseradish leaves, green bean leaves and pepper leaves were collected for the 2008 program. The leaves of these plants were sampled as representative of broadleaf vegetation which is a measurement of radionuclide deposition. In addition to the broadleaf vegetation, tomato samples were collected from all locations. Samples were collected during the late summer/fall harvest season. Each sample was analyzed for gamma emitters using gamma spectroscopy.

The analysis of food product samples collected during 2008 did not detect any plant-related radionuclides. Results for the past five years also demonstrate that there is no buildup of plant-related radionuclides in the garden food products grown in areas close to the site.

Naturally-occurring Be-7, K-40, Ra-226 and AcTh-228 were detected in food product samples. The results for naturally-occurring radionuclides are consistent with the data of prior years.

Analytical results for food products are found in Section 6.0, Table 6-12.

C. Dose Evaluation

The calculated dose as a result of plant effluents is not evaluated due to the fact that no plant-related radionuclides were detected. The food product sampling program demonstrated no measurable offsite dose to man from this pathway as a result of operations of the plants located at Nine Mile Point.

D. Data Trends

Food product/vegetation sample results for the last five years demonstrate that there is no chronic deposition or buildup of plant-related radionuclides in the garden food products in the environs near the site.

The last positive indication was for Cs-137 which was detected at one indicator location in 1999 with a concentration of 0.007 pCi/g (wet).

Historically, Cs-137 had been detected in ten separate years since 1976 ranging from a maximum mean concentration of 0.047 pCi/g (wet) in 1985 to a minimum of 0.006 pCi/g (wet) in 1994. The trend for Cs-137 is a general reduction in concentration to non detectable levels in samples collected during the 2000 through 2008 sample programs.

Historical data of food product results are presented in Section 7.0, Tables 7-23 and 7-24.

5.2.7 LAND USE CENSUS RESULTS

A. Results Summary

The ODCM requires that an annual land use census be performed to identify potential new locations for milk sampling and for calculating the dose to man from plant effluents. In 2008, a milk animal census, a nearest resident census and a garden survey were performed.

The results of the closest residence census conducted in 2008 required no change to Fitzpatrick ODCMs' closest resident location.

A garden census, not required by the ODCM, is performed to identify appropriate garden sampling locations and dose calculation receptors. Garden samples were collected from a number of locations identified in the census as active for 2008. See Table 3.3-1 for 2008 sampling locations.

B. Data Evaluation and Discussion

A land use census is conducted each year to determine the utilization of land in the vicinity of the Nine Mile Point site. The land use census consists of two types of surveys. A milk animal census is conducted to identify all milk animals within a distance of 10 miles from the site. The census, covering areas out to a distance of 10 miles exceeds the 5 mile distance required by the ODCM. A resident census is conducted and is designed to identify the nearest resident in each meteorological sector out to a distance of 5 miles.

The milk animal census is an estimation of the number of cows and goats within an approximate 10 mile radius of the Nine Mile Point Site. The annual census is conducted during the first half of the grazing season by sending questionnaires to previous milk animal owners and also by road surveys to locate any possible new locations. In the event the questionnaires are not answered, the owners are contacted by telephone or in person. The local county agricultural extension service is also contacted as an additional source of information concerning new milk animal locations in the vicinity of the site.

The number of milk animals located within an approximate 10 mile radius of the site was estimated to be 416 cows and 1 goat based on the 2008 land use census. The number of cows has increased by 35 when compared to the 2007 census. The census determined that the milk from the goats identified was not shipped in 2008. The results of the milk animal census are found in Section 6.0, Table 6-13.

The second type of census conducted is a residence census. The census is conducted in order to identify the closest residence within 5 miles in each of the 22.5 degree land-based meteorological sectors. There are only eight sectors over land where residences are located within 5 miles. The water sectors include: N, NNE, NE, ENE, W, WNW, NW and NNW. The results of the residence census, showing the applicable sectors and degrees and distance of each of the nearest residence, are found in Section 6.0, Table 6-14. There were no changes identified in the 2008 census for the closest resident in the land based meteorological sectors. The nearest resident locations are illustrated in Section 3.3, Figure 3.3-5.

5.2.8 DIRECT RADIATION, THERMOLUMINESCENT DOSIMETERS (TLD)

Independent Spent Fuel Storage Installation (ISFSI)

A. Results Summary

Thermoluminescent Dosimeters (TLDs) are used to measure direct radiation (gamma dose) in the localized environment of the ISFSI pad. Eighteen TLD locations are in place around the perimeter of the ISFSI pad. TLDs were placed at these locations prior to loading the first storage casks for baseline dose rate determination in the general area of the pad.

On April 25, 2002, the ISFSI facility was placed in service with the installation of the first storage cask on the pad. Two subsequent storage casks were moved to the storage facility on May 8, 2002 and May 21, 2002. A second series of six storage casks were added to the storage facility starting on September 6, 2005. The sixth and last cask in this series was placed in the storage facility on November 12, 2005 bringing the total number of casks in storage to nine. The nine casks are located on the northern end of the pad are in close proximity to the north ISFSI perimeter fence. In addition, the radiation exposure from hydrogen water chemistry also contribute to the higher dose rates measured at the north fenceline of the ISFSI storage facility.

The increase in dose rate is limited to the general area of the storage facility. The implementation and loading of the ISFSI project has resulted in no increase in dose at the site boundary or to the public. The analysis of offsite doses from direct radiation measurements, presented in Section 5.2.4 of this report, concludes that there is no significant difference in annual dose to the public at or beyond the site boundary. The measured annual dose rate at the nearest residence to the site was consistent with the dose rates measured at the site boundary and the offsite control locations. The results for the Site Boundary, Offsite Sectors, and Special Interest (offsite) were well within expected normal variation when compared to the Control TLD results. The results for the 2008 environmental TLD monitoring program indicate that there is no significant increase in dose rates as a result of operations at the site. The use of hydrogen injection and the implementation of the Independent Spent Fuel Storage Installation (ISFSI) at the FitzPatrick plant did not measurably increase the ambient radiation exposure rate at or beyond the site boundary. The lack of a dose rate increase at or beyond the site boundary is consistent with design calculations performed to evaluate compliance with 10 CFR72.104(a).

The measured results of the 2008 TLD monitoring program demonstrate compliance with the offsite dose limits to members of the public specified in 40CFR190 and 10CFR72.104(a).

B. Program Design

An array of eight TLD locations was established around the perimeter of the ISFSI pad 18 months prior to facility usage. Six months prior to the facility becoming operational, an additional 10 TLD locations were established at areas of interest on the facility perimeter. These preoperational TLDs were used for baseline dose rate determination. The TLDs are placed, collected and read each quarter. Two dosimeters are placed at each location and the average of the two dosimeters is reported. The quarterly results are compared to baseline data to assess the contribution to ambient dose rates in the vicinity of the storage facility from casks as they are placed on the storage pad.

C. Dose Evaluation

A maximum dose rate of 18.0 mrem per standard month above the baseline dose rate was measured at the north perimeter fence. The lowest measured dose rate of 2008 was 3.1 mrem per standard month above the baseline dose rate and was measured at the southern perimeter fence.

An evaluation of Site Boundary TLDs and Control TLDs results for 2008 shows that there is no increase in dose rate at or beyond the site boundary. A detailed discussion of this evaluation is found in Section 5.2.4. The Environmental TLD results for this period show no significant difference in control and site boundary dose rates compared to 2007.

2008 DOSE IN MREM PER STANDARD MONTH

	Minimum	Maximum	Mean
Site Boundary	3.2	4.8	4.0
Control	3.3	5.1	4.3

5.3 CONCLUSION

The Radiological Environmental Monitoring Program (REMP) is an ongoing program implemented to measure and document the radiological impact of JAFNPP operations on the local environment. The program is designed to detect and evaluate small changes in the radiological environment surrounding the site. Environmental media representing food sources consumed at the higher levels of the food chain, such as fish, food products and milk, are part of a comprehensive sampling program. Results of all samples are reviewed closely to determine any possible impact to the environment or to man. In addition, program results are evaluated for possible short and long term historical trends.

The federal government has established dose limits to protect the public from radiation and radioactivity. The Nuclear Regulatory Commission (NRC) specifies a whole body dose limit of 100 mrem/yr to be received by the maximum exposed member of the general public. This limit is set forth in Section 1301, Part 20, Title 10 of the U.S. Code of Federal Regulations (10CFR20). The Environmental Protection Agency (EPA) limits the annual whole body dose to 25 mrem/yr, which is specified in Section 10, Part 190, Title 40, of the Code of Federal Regulations (40CFR190). Radiation exposure to members of the public, calculated based on the results of the REMP, is extremely small. The dose to members of the public from operations at the Nine Mile Point site, based on environmental measurement and calculations made from effluent releases, is determined to be a fraction of limits set forth by the NRC and EPA.

The results of the 2008 REMP continue to clearly demonstrate that there is no significant short term or chronic long term radiological impact on the environment in the vicinity of the Nine Mile Point site. No unusual radiological characteristics were measured or observed in the local environment. The REMP continues to demonstrate that the effluents from the site to the environment contribute no significant or even measurable radiation exposures to the general public as confirmed by the sampling and analysis of environmental media from recognized environmental pathways. Based on TLD results there was no measurable increase in radiation levels beyond the site boundary as a result of the hydrogen water chemistry programs. Environmental radiation levels measured at the nearest residence are at the background level based on control station TLD results. The only measurable radiological impact on the environment continues to be the result of atmospheric weapons testing conducted in the early 1980s and the 1986 accident at the Chernobyl Nuclear Power Plant. Both of these source terms have contributed to a measurable inventory of Cs-137 in the environment. The results for the 2008 sample program demonstrate that the concentrations of man-made radionuclides continue to decline. This reduction in environmental background concentrations will allow for the site environmental program to become more sensitive to the measurable impact of plant operations on the environment as time goes on.

The environmental monitoring program did not detect any potential plant-related radionuclide in the sample media collected during 2008. Dose from man-made sources in the environment is very small when compared to the dose originating from naturally-occurring sources of radioactivity.

Radiation from naturally-occurring radionuclides such as K-40 and Ra-226 contributed the vast majority of the total annual dose to members of the general public. The dose to members of the public, resulting from plant operations, is extremely small in comparison to the dose contribution from natural background levels and sources other than the plants. The whole body dose in Oswego County due to natural sources is approximately 50 – 60 mrem per individual per year as demonstrated by control environmental TLDs. The fraction of the annual dose to man, attributable to site operation, remains insignificant.

Based upon the overall results of the 2008 Radiological Environmental Monitoring Program, it can be concluded that the levels and variation of radioactivity in the environment samples were consistent with background levels that would be expected for the lakeshore environment of the site.

5.4 REFERENCES

1. U.S. Nuclear Regulatory Commission Regulatory Guide 1.109, "Calculation of Annual Doses to Man from Routine Releases of Reactor Effluents for the Purpose of Evaluating Compliance with 10 CFR Part 50, Appendix I", March 1976.
2. U.S. Nuclear Regulatory Commission Regulatory Guide 1.109, "Calculation of Annual Doses to Man from Routine Releases of Reactor Effluents for the Purpose of Evaluating Compliance with 10 CFR Part 50, Appendix I", October 1977 (Revision 1).
3. U.S. Nuclear Regulatory Commission Regulatory Guide 4.8, "Environmental Technical Specifications for Nuclear Power Plants", December, 1975.
4. U.S. Nuclear Regulatory Commission Branch Technical Position to Regulatory Guide 4.8, "An Acceptable Radiological Environmental Monitoring Program", Revision 1, November 1979.
5. National Council on Radiation Protection and Measurements (NCRP), Environmental Radiation Measurements, NCRP Report No. 50, 1975.
6. National Council on Radiation Protection and Measurements (NCRP), Natural Background Radiation in the United States, NCRP Report No. 45, 1975.
7. National Council on Radiation Protection and Measurements (NCRP), Cesium-137 from the Environment to Man: Metabolism and Dose, NCRP Report No. 52, 1977.
8. National Council on Radiation Protection and Measurements (NCRP), Radiation Exposure from Consumer Products and Miscellaneous Sources, NCRP Report No. 56, 1977.
9. International Commission on Radiological Protection (ICRP), Radionuclide Release into the Environment: Assessment of Doses to Man, ICRP Publication 29, 1979.
10. Glasstone, Samuel and Jordan, Walter H., Nuclear Power and Its Environmental Effects, First Edition, American Nuclear Society, La Grange Park, Ill., 1980.
11. Schleien, Bernard. The Health Physics and Radiological Health Handbook. Scinta, Inc., Silver Spring, Maryland, 1992.
12. U.S. Department of Health and Human Services. Preparedness and Response in Radiation Accidents, National Center for Devices and Radiological Health, Rockville, Maryland 20857, August 1983.
13. National Council on Radiation Protection and Measurements (NCRP), Ionizing Radiation Exposure of the Population of the United States, NCRP Report No. 93, 1987.
14. National Council on Radiation Protection and Measurements (NCRP), Exposure of the Population in the United States and Canada from Natural Background Radiation, NCRP Report No. 94, 1987.

6.0 REPORT PERIOD ANALYTICAL RESULTS TABLES

Environmental sample data is summarized in table format. Tables are provided for select sample media and contain data based on actual values obtained over the year. These values are comprised of both positive values and LLD values where applicable.

The LLD is the smallest concentration of radioactive material in a sample that will be detected with 95% probability and with 5% probability of falsely concluding that a blank observation represents a "real" signal (see Section 3.7.3 for detailed explanation).

When the initial count of a sample indicates the presence of radioactivity, two recounts are normally performed. When a radionuclide is positively identified in two or more counts, the analytical results for that radionuclide are reported as the mean of the positive detections and the associated error for that mean (see Section 3.7.2 for methodology).

Many of the tables are footnoted with the term "Plant Related Radionuclides". Plant related radionuclides are radionuclides that are produced in the reactor; as a result of plant operation, either through the activation or fission process.

TABLE 6-1
CONCENTRATIONS OF GAMMA EMITTERS IN SHORELINE SEDIMENT SAMPLES
Results in Units of pCi/kg (dry) ± 1 Sigma

Sample Location ***	Collection Date	Gamma Emitters						
		K-40		Co-60	Cs-134	Cs-137	Zn-65	Others †
Sunset Bay (05) *	04/17/08	21200	+/- 660	< 53.9	< 62.8	< 56.8	< 87.5	<LLD
	10/17/08	19050	+/- 883	< 98.4	< 48.8	< 78.4	< 122.6	<LLD
Lang's Beach (06, Control)	04/17/08	8066	+/- 394	< 34.1	< 32.0	< 36.8	< 77.3	<LLD
	10/17/08	13520	+/- 600	< 56.7	< 57.6	< 51.1	< 83.2	<LLD

* Sample required by the ODCM

*** Corresponds to sample location noted on Figure 3.3-5

† Plant related radionuclides

TABLE 6-2
CONCENTRATIONS OF GAMMA EMITTERS IN FISH SAMPLES
Results in Units of pCi/kg (wet) ± 1 Sigma
FITZPATRICK * (03)***

Date	Description	Gamma Emitters								
		K-40	Mn-54	Co-58	Fe-59	Co-60	Cs-134	Cs-137	Zn-65	Others †
6/27/2008	Walleye	6050 +/- 415	< 44	< 48	< 131	< 57	< 42	< 50	< 142	<LLD
7/1/2008	Brown Trout	4355 +/- 417	< 53	< 45	< 124	< 45	< 44	< 39	< 112	<LLD
7/1/2008	Smallmouth Bass	4160 +/- 324	< 42	< 39	< 87	< 42	< 44	< 39	< 94	<LLD
9/19/2008	Walleye	5971 +/- 494	< 49	< 48	< 161	< 66	< 49	< 52	< 146	<LLD
9/19/2008	Smallmouth Bass	6647 +/- 450	< 56	< 42	< 150	< 54	< 37	< 57	< 146	<LLD
9/23/2008	Brown Trout	4424 +/- 432	< 56	< 35	< 125	< 78	< 45	< 45	< 144	<LLD

* Sample required by the ODCM

*** Corresponds to sample location noted on Figure 3.3-5

† Plant related radionuclides

TABLE 6-2 (Continued)
CONCENTRATIONS OF GAMMA EMITTERS IN FISH SAMPLES
 Results in Units of pCi/kg (wet) \pm 1 Sigma
 NINE MILE POINT * (02)***

Date	Description	Gamma Emitters								
		K-40	Mn-54	Co-58	Fe-59	Co-60	Cs-134	Cs-137	Zn-65	Others †
6/27/2008	Brown Trout	9042 +/- 695	< 62	< 71	< 231	< 48	< 41	< 71	< 197	<LLD
6/30/2008	Smallmouth Bass	5574 +/- 420	< 36	< 38	< 113	< 35	< 42	< 38	< 77	<LLD
7/2/2008	Walleye	4164 +/- 415	< 40	< 45	< 63	< 48	< 49	< 43	< 106	<LLD
9/19/2008	Brown Trout	7386 +/- 666	< 68	< 76	< 201	< 82	< 64	< 57	< 195	<LLD
9/19/2008	Walleye	3580 +/- 359	< 44	< 29	< 143	< 54	< 42	< 42	< 126	<LLD
9/19/2008	Smallmouth Bass	4173 +/- 363	< 42	< 43	< 132	< 42	< 41	< 34	< 112	<LLD

* Sample required by the ODCM

*** Corresponds to sample location noted on Figure 3.3-5

† Plant related radionuclides

TABLE 6-2 (Continued)
CONCENTRATIONS OF GAMMA EMITTERS IN FISH SAMPLES
Results in Units of pCi/kg (wet) ± 1 Sigma
OSWEGO HARBOR (CONTROL) * (00)***

Date	Description	Gamma Emitters									
		K-40	Mn-54	Co-58	Fe-59	Co-60	Cs-134	Cs-137	Zn-65	Others †	
6/28/2008	Smallmouth Bass	4330 +/- 380	< 43	< 42	< 133	< 45	< 38	< 38	< 121	<LLD	
7/1/2008	Walleye	3792 +/- 364	< 39	< 39	< 140	< 48	< 39	< 46	< 99	<LLD	
7/2/2008	Brown Trout	9027 +/- 709	< 81	< 63	< 193	< 62	< 58	< 61	< 195	<LLD	
9/12/2008	Brown Trout	9268 +/- 771	< 68	< 66	< 244	< 84	< 36	< 81	< 209	<LLD	
9/12/2008	Smallmouth Bass	3683 +/- 383	< 46	< 53	< 113	< 44	< 38	< 46	< 114	<LLD	
9/19/2008	Walleye	3575 +/- 383	< 40	< 41	< 97	< 45	< 46	< 37	< 101	<LLD	

* Sample required by the ODCM

*** Corresponds to sample location noted on Figure 3.3-5

† Plant related radionuclides

TABLE 6-3
CONCENTRATIONS OF TRITIUM IN SURFACE WATER SAMPLES
(QUARTERLY COMPOSITES)
Results in Units of pCi/l ± 1 Sigma

Station Code	Period	Date		Tritium
Fitzpatrick* (03, Inlet)***	First Quarter	01/02/08	03/31/08	<450
	Second Quarter	03/31/08	07/01/08	<439
	Third Quarter	07/01/08	09/27/08	<427
	Fourth Quarter	09/27/08	01/05/09	<424
Oswego Steam Station* (08, Control)***	First Quarter	12/28/07	03/28/08	<450
	Second Quarter	03/28/08	06/27/08	<440
	Third Quarter	06/27/08	09/25/08	<427
	Fourth Quarter	09/25/08	12/26/08	<424
Nine Mile Point Unit 1** (09, Inlet)***	First Quarter	12/28/07	03/28/08	<450
	Second Quarter	03/28/08	06/27/08	<440
	Third Quarter	06/27/08	09/25/08	<427
	Fourth Quarter	09/25/08	12/26/08	<424
Nine Mile Point Unit 2** (11, Inlet)***	First Quarter	12/28/07	03/28/08	<450
	Second Quarter	03/28/08	06/27/08	<440
	Third Quarter	06/27/08	09/25/08	<427
	Fourth Quarter	09/25/08	12/26/08	<424
Oswego City Water** (10)***	First Quarter	12/28/07	03/28/08	<450
	Second Quarter	03/28/08	06/27/08	<440
	Third Quarter	06/27/08	09/25/08	<427
	Fourth Quarter	09/25/08	12/26/08	<424

* Sample location required by the ODCM

** Optional sample location

*** Corresponds to sample location noted on Figure 3.3-4

TABLE 6-4
CONCENTRATIONS OF GAMMA EMITTERS IN SURFACE WATER SAMPLES
Results in Units of pCi/liter \pm 1 Sigma
OSWEGO CITY WATER (10)*****

Nuclide	January	February	March	April	May	June
I-131	< 14.32	< 14.94	< 14.36	< 13.73	< 11.39	< 9.53
Cs-134	< 4.16	< 5.09	< 4.47	< 2.27	< 3.70	< 1.67
Cs-137	< 3.80	< 5.08	< 3.12	< 3.12	< 3.45	< 2.49
Zr-95	< 8.33	< 9.22	< 7.18	< 5.18	< 6.57	< 4.92
Nb-95	< 5.08	< 6.61	< 4.82	< 3.84	< 4.41	< 3.18
Co-58	< 4.61	< 5.80	< 4.06	< 3.72	< 4.19	< 3.04
Mn-54	< 3.49	< 4.64	< 3.74	< 2.91	< 3.11	< 2.50
Fe-59	< 12.99	< 12.89	< 12.40	< 9.73	< 13.54	< 9.19
Zn-65	< 8.27	< 11.81	< 7.62	< 4.04	< 7.99	< 6.54
Co-60	< 3.13	< 5.96	< 3.50	< 2.64	< 3.16	< 3.09
K-40	337.3 +/- 25.6	322 +/- 30.4	109.2 +/- 16.9	326 +/- 19.2	186.8 +/- 18.9	< 24.81
Ba/La-140	< 11.21	< 12.70	< 8.65	< 8.87	< 10.68	< 7.27
Nuclide	July	August	September	October	November	December
I-131	< 13.86	< 14.85	< 12.54	< 12.70	< 14.81	< 14.88
Cs-134	< 2.45	< 3.86	< 5.68	< 2.30	< 3.12	< 1.70
Cs-137	< 3.55	< 4.05	< 4.55	< 3.12	< 4.60	< 2.44
Zr-95	< 7.04	< 7.30	< 9.34	< 6.76	< 9.32	< 5.22
Nb-95	< 4.94	< 5.13	< 5.78	< 4.45	< 5.12	< 3.54
Co-58	< 4.36	< 4.32	< 4.81	< 3.88	< 5.37	< 2.89
Mn-54	< 3.46	< 3.78	< 3.89	< 3.04	< 4.45	< 2.48
Fe-59	< 11.09	< 11.61	< 14.53	< 10.40	< 17.75	< 8.19
Zn-65	< 4.70	< 10.11	< 12.48	< 4.52	< 11.89	< 6.05
Co-60	< 3.75	< 4.24	< 4.54	< 3.40	< 4.79	< 2.44
K-40	392.4 +/- 23.3	162.9 +/- 21.7	415.6 +/- 32.7	382.7 +/- 21.8	168.6 +/- 26.4	140 +/- 12.9
Ba/La-140	< 11.20	< 11.98	< 9.25	< 9.85	< 13.82	< 10.53

** Optional Sample Location

*** Corresponds to sample location noted on Figure 3.3-4

TABLE 6-4 (Continued)
CONCENTRATIONS OF GAMMA EMITTERS IN SURFACE WATER SAMPLES
Results in Units of pCi/liter \pm 1 Sigma
NINE MILE POINT UNIT 1 ** (09, INLET)***

Nuclide	January	February	March	April	May	June
I-131	< 13.59	< 6.56	< 11.18	< 11.25	< 14.65	< 13.85
Cs-134	< 3.86	< 2.56	< 4.03	< 1.75	< 4.00	< 2.36
Cs-137	< 2.74	< 2.76	< 3.82	< 2.29	< 3.94	< 3.41
Zr-95	< 6.97	< 6.36	< 5.77	< 4.91	< 8.49	< 6.42
Nb-95	< 4.62	< 3.30	< 4.72	< 3.56	< 5.77	< 4.05
Co-58	< 3.65	< 2.72	< 4.91	< 2.74	< 4.11	< 3.66
Mn-54	< 3.33	< 2.54	< 3.78	< 2.20	< 4.25	< 3.20
Fe-59	< 10.59	\leq 7.41	< 11.04	< 7.93	< 13.90	< 9.73
Zn-65	< 5.21	< 6.33	< 7.92	< 5.85	< 6.60	< 8.51
Co-60	< 3.42	< 2.60	< 4.25	< 2.13	< 4.20	< 4.02
K-40	141.1 +/- 17.4	79.6 +/- 12.8	< 37.33	37.27 +/- 8.47	922.9 +/- 36.5	46.2 +/- 12.5
Ba/La-140	< 11.73	< 6.04	< 11.94	< 6.53	< 11.74	< 10.30
Nuclide	July	August	September	October	November	December
I-131	< 12.68	< 10.91	< 14.91	< 9.99	< 12.70	< 11.28
Cs-134	< 2.26	< 2.03	< 4.87	< 2.49	< 2.64	< 1.41
Cs-137	< 3.68	< 2.71	< 6.12	< 2.16	< 3.73	< 1.89
Zr-95	< 6.83	< 5.76	< 10.61	< 4.22	< 6.89	< 4.02
Nb-95	< 4.20	< 2.89	< 7.16	< 3.21	< 5.01	< 2.76
Co-58	< 3.34	< 3.41	< 6.64	< 2.84	< 4.32	< 2.25
Mn-54	< 3.22	< 2.96	< 6.19	< 2.26	< 3.79	< 1.94
Fe-59	< 10.32	< 7.96	< 17.63	< 6.95	< 11.82	< 6.04
Zn-65	< 7.52	< 4.07	< 15.25	< 5.73	< 4.64	< 4.04
Co-60	< 3.42	< 2.73	< 6.06	< 2.48	< 3.66	< 1.87
K-40	165.7 +/- 17.8	51.4 +/- 10.7	850.1 +/- 50.1	96.95 +/- 11.19	< 44.70	72.44 +/- 8.65
Ba/La-140	< 10.14	< 8.08	< 13.66	< 5.88	< 8.71	< 6.73

** Optional Sample Location

*** Corresponds to sample location noted on Figure 3.3-4

TABLE 6-4 (continued)
CONCENTRATIONS OF GAMMA EMITTERS IN SURFACE WATER SAMPLES
Results in Units of pCi/liter ± 1 Sigma
FITZPATRICK* (03, INLET)***

Nuclide	January		February		March		April		May		June	
I-131	<	0.55	<	0.53	<	0.42	<	0.82	<	0.72	<	0.42
Cs-134	<	3.01	<	4.79	<	6.70	<	2.22	<	3.74	<	1.78
Cs-137	<	3.97	<	5.28	<	6.13	<	2.37	<	5.94	<	2.27
Zr-95	<	7.42	<	8.33	<	14.34	<	5.53	<	9.40	<	4.13
Nb-95	<	5.21	<	7.03	<	10.49	<	3.19	<	7.46	<	3.17
Co-58	<	5.35	<	5.42	<	7.55	<	3.31	<	5.53	<	2.68
Mn-54	<	4.14	<	4.96	<	7.67	<	2.69	<	5.81	<	2.28
Fe-59	<	14.32	<	15.43	<	22.07	<	7.92	<	15.47	<	6.48
Zn-65	<	6.36	<	13.02	<	15.23	<	5.98	<	8.05	<	5.33
Co-60	<	4.01	<	4.01	<	8.18	<	2.93	<	6.67	<	2.29
K-40	139.8	+/- 22.8	<	53.32	908	+/- 57	72.61	+/- 13.24	<	50.16	90.6	+/- 11.4
Ba/La-140	<	9.91	<	13.66	<	13.94	<	6.31	<	13.63	<	6.58
Nuclide	July		August		September		October		November		December	
I-131	<	0.53	<	0.39	<	0.70	<	0.53	<	0.55	<	0.47
Cs-134	<	2.03	<	3.68	<	3.94	<	1.39	<	3.53	<	3.36
Cs-137	<	2.64	<	5.06	<	3.18	<	1.80	<	3.10	<	4.10
Zr-95	<	5.60	<	9.90	<	5.16	<	3.52	<	5.96	<	8.59
Nb-95	<	3.45	<	6.27	<	4.04	<	2.21	<	4.29	<	5.99
Co-58	<	3.45	<	5.31	<	3.49	<	2.04	<	3.01	<	4.78
Mn-54	<	3.08	<	4.85	<	3.68	<	1.73	<	3.07	<	4.03
Fe-59	<	7.05	<	17.97	<	8.07	<	5.33	<	8.02	<	16.44
Zn-65	<	6.92	<	13.30	<	8.51	<	3.63	<	4.07	<	11.14
Co-60	<	3.11	<	5.64	<	3.41	<	1.90	<	2.69	<	5.24
K-40	29.76	+/- 10.86	421	+/- 36	81.87	+/- 15.32	33.2	+/- 69	37.35	+/- 10.98	222.1	+/- 23.8
Ba/La-140	<	6.94	<	11.15	<	5.38	<	3.70	<	6.41	<	10.09

* Sample Location required by ODCM

*** Corresponds to sample location noted on Figure 3.3-4

TABLE 6-4 (Continued)
CONCENTRATIONS OF GAMMA EMITTERS IN SURFACE WATER SAMPLES
 Results in Units of pCi/liter \pm 1 Sigma
NINE MILE POINT UNIT 2 ** (11, INLET)***

Nuclide	January		February		March		April		May		June	
I-131	<	12.32	<	10.30	<	14.72	<	10.75	<	10.07	<	11.66
Cs-134	<	3.45	<	3.82	<	4.85	<	4.11	<	2.12	<	3.79
Cs-137	<	3.38	<	3.27	<	4.30	<	3.55	<	2.75	<	3.50
Zr-95	<	6.87	<	6.55	<	8.50	<	6.28	<	5.47	<	7.05
Nb-95	<	4.49	<	4.69	<	5.49	<	4.54	<	3.41	<	4.52
Co-58	<	3.38	<	3.29	<	5.39	<	4.18	<	3.26	<	3.91
Mn-54	<	3.09	<	3.42	<	4.16	<	3.31	<	3.00	<	3.43
Fe-59	<	11.20	<	10.28	<	14.66	<	8.69	<	9.65	<	10.54
Zn-65	<	6.85	<	8.19	<	12.73	<	7.54	<	4.02	<	8.60
Co-60	<	2.94	<	3.01	<	5.51	<	3.98	<	3.34	<	3.77
K-40	288.3	+/- 19	100	+/- 15.4	329.2	+/- 29.8	89.97	+/- 17.62	90.4	+/- 13.9	166.9	+/- 19.5
Ba/La-140	<	9.75	<	10.89	<	11.71	<	9.70	<	6.11	<	11.51
Nuclide	July		August		September		October		November		December	
I-131	<	13.44	<	14.59	<	8.80	<	12.85	<	12.03	<	13.45
Cs-134	<	2.15	<	4.34	<	2.31	<	3.86	<	4.24	<	1.67
Cs-137	<	2.69	<	3.94	<	3.11	<	3.28	<	4.31	<	2.05
Zr-95	<	6.27	<	8.48	<	7.28	<	6.91	<	9.16	<	5.28
Nb-95	<	4.43	<	4.26	<	3.66	<	4.83	<	5.30	<	3.23
Co-58	<	3.39	<	3.73	<	3.22	<	3.74	<	5.06	<	2.71
Mn-54	<	3.18	<	3.89	<	3.74	<	3.00	<	4.51	<	2.41
Fe-59	<	9.77	<	13.25	<	10.71	<	12.97	<	13.40	<	7.68
Zn-65	<	3.72	<	10.36	<	8.43	<	4.78	<	11.09	<	5.30
Co-60	<	2.85	<	4.71	<	3.23	<	3.81	<	5.18	<	2.45
K-40	38.6	+/- 11.5	171.6	+/- 20.03	109.7	+/- 16.1	420.7	+/- 23.3	<	38.43	104	+/- 11
Ba/La-140	<	9.23	<	13.16	<	7.26	<	9.92	<	14.00	<	8.98

** Optional Sample Location.

*** Corresponds to sample location noted on Figure 3.3-4

TABLE 6-4
CONCENTRATIONS OF GAMMA EMITTERS IN SURFACE WATER SAMPLES
Results in Units of pCi/liter \pm 1 Sigma
OSWEGO STEAM STATION * (08, CONTROL)***

Nuclide	January	February	March	April	May	June
I-131	< 0.68	< 0.49	< 0.75	< 0.55	< 0.73	< 0.69
Cs-134	< 5.61	< 4.98	< 5.21	< 3.91	< 3.61	< 1.80
Cs-137	< 5.19	< 3.60	< 6.09	< 4.94	< 4.76	< 2.43
Zr-95	< 10.19	< 8.19	< 7.96	< 9.66	< 8.30	< 4.19
Nb-95	< 7.04	< 6.14	< 7.56	< 5.15	< 5.70	< 3.12
Co-58	< 5.77	< 5.13	< 5.99	< 5.74	< 5.01	< 2.68
Mn-54	< 5.62	< 4.82	< 4.86	< 5.26	< 4.73	< 2.14
Fe-59	< 16.83	< 12.95	< 17.31	< 14.67	< 16.31	< 7.02
Zn-65	< 12.90	< 10.15	< 12.33	< 12.87	< 10.59	< 2.86
Co-60	< 5.21	< 3.54	< 6.43	< 6.70	< 4.22	< 2.12
K-40	282.4 +/- 30.9	166 +/- 26.6	< 61.59	< 51.80	< 29.55	< 21.81
Ba/La-140	< 13.32	< 13.04	< 13.55	< 11.92	< 11.77	< 5.80
Nuclide	July	August	September	October	November	December
I-131	< 0.57	< 0.62	< 0.65	< 0.47	< 0.78	< 0.99
Cs-134	< 2.93	< 5.48	< 2.79	< 2.86	< 3.07	< 2.57
Cs-137	< 3.26	< 5.33	< 3.87	< 3.76	< 3.89	< 2.55
Zr-95	< 5.42	< 11.07	< 7.41	< 8.91	< 8.95	< 4.80
Nb-95	< 4.57	< 7.09	< 5.60	< 5.88	< 5.12	< 3.50
Co-58	< 4.23	< 6.50	< 4.88	< 4.96	< 4.10	< 2.82
Mn-54	< 3.19	< 5.21	< 3.97	< 4.00	< 3.44	< 2.45
Fe-59	< 9.75	< 17.14	< 13.04	< 15.16	< 12.38	< 8.45
Zn-65	< 8.98	< 14.58	< 9.99	< 10.42	< 12.15	< 3.69
Co-60	< 4.05	< 6.35	< 4.89	< 4.49	< 4.93	< 2.39
K-40	79.55 +/- 15.62	790.6 +/- 45.5	118.5 +/- 21.8	446.5 +/- 29.2	68.29 +/- 17.14	392.6 +/- 17.4
Ba/La-140	< 10.60	< 13.50	< 11.82	< 14.99	< 13.02	< 8.84

* Sample Location required by ODCM

*** Corresponds to sample location noted on Figure 3.3-4

TABLE 6-5
NMPNS/JAF SITE
ENVIRONMENTAL AIRBORNE PARTICULATE SAMPLES - OFFSITE SAMPLE LOCATIONS
GROSS BETA ACTIVITY pCi/ m³ ± 1 Sigma

Week End Date	R-1 *	R-2 *	R-3 *	R-4 *	R-5 *	D-2 **	E **	F **	G **
1/2/2008	0.023 ± 0.002	0.021 ± 0.001	0.022 ± 0.002	0.021 ± 0.002	0.019 ± 0.002	0.019 ± 0.001	0.018 ± 0.001	0.022 ± 0.002	0.019 ± 0.001
1/8/2008	0.021 ± 0.002	0.020 ± 0.002	0.018 ± 0.002	0.021 ± 0.002	0.019 ± 0.002	0.014 ± 0.001	0.022 ± 0.002	0.019 ± 0.002	0.016 ± 0.002
1/15/2008	0.014 ± 0.001	0.015 ± 0.001	0.014 ± 0.001	0.016 ± 0.001	0.012 ± 0.001	0.015 ± 0.001	0.015 ± 0.001	0.013 ± 0.001	0.013 ± 0.001
1/22/2008	0.019 ± 0.001	0.018 ± 0.001	0.016 ± 0.001	0.020 ± 0.001	0.018 ± 0.001	0.016 ± 0.001	0.018 ± 0.001	0.019 ± 0.001	0.018 ± 0.001
1/29/2008	0.025 ± 0.002	0.025 ± 0.002	0.018 ± 0.001	0.026 ± 0.002	0.022 ± 0.002	0.023 ± 0.002	0.022 ± 0.002	0.023 ± 0.002	0.021 ± 0.002
2/6/2008	0.019 ± 0.002	0.019 ± 0.001	0.019 ± 0.002	0.017 ± 0.001	0.018 ± 0.001	No Sample	0.017 ± 0.001	0.021 ± 0.001	0.019 ± 0.002
2/12/2008	0.019 ± 0.001	0.018 ± 0.001	0.020 ± 0.002	0.018 ± 0.001	0.020 ± 0.002	0.021 ± 0.001	0.024 ± 0.002	0.022 ± 0.002	0.018 ± 0.001
2/19/2008	0.019 ± 0.001	0.019 ± 0.001	0.021 ± 0.002	0.022 ± 0.002	0.020 ± 0.001	0.019 ± 0.002	0.020 ± 0.002	0.020 ± 0.002	0.019 ± 0.001
2/26/2008	0.018 ± 0.001	0.018 ± 0.001	0.015 ± 0.001	0.018 ± 0.001	0.017 ± 0.001	0.014 ± 0.001	0.016 ± 0.001	0.021 ± 0.002	0.018 ± 0.001
3/4/2008	0.015 ± 0.001	0.018 ± 0.001	0.018 ± 0.001	0.018 ± 0.001	0.016 ± 0.001	0.013 ± 0.001	0.015 ± 0.001	0.018 ± 0.001	0.016 ± 0.001
3/11/2008	0.017 ± 0.001	0.018 ± 0.001	0.015 ± 0.001	0.019 ± 0.002	0.018 ± 0.001	0.014 ± 0.001	0.016 ± 0.001	0.020 ± 0.002	0.016 ± 0.001
3/18/2008	0.016 ± 0.001	0.014 ± 0.001	0.015 ± 0.001	0.015 ± 0.001	0.013 ± 0.001	0.015 ± 0.001	0.013 ± 0.001	0.016 ± 0.001	0.013 ± 0.001
3/25/2008	0.014 ± 0.001	0.014 ± 0.001	0.015 ± 0.001	0.016 ± 0.001	0.014 ± 0.001	0.015 ± 0.001	0.018 ± 0.001	0.017 ± 0.001	0.019 ± 0.001
4/1/2008	0.012 ± 0.001	0.016 ± 0.001	0.014 ± 0.001	0.014 ± 0.001	0.017 ± 0.001	0.013 ± 0.001	0.012 ± 0.001	0.018 ± 0.001	0.012 ± 0.001
4/8/2008	0.016 ± 0.001	0.015 ± 0.001	0.015 ± 0.001	0.018 ± 0.001	0.017 ± 0.001	0.015 ± 0.001	0.017 ± 0.001	0.016 ± 0.001	0.013 ± 0.001
4/15/2008	0.008 ± 0.001	0.010 ± 0.001	0.007 ± 0.001	0.009 ± 0.001	0.008 ± 0.001	0.008 ± 0.001	0.006 ± 0.001	0.010 ± 0.001	0.007 ± 0.001
4/22/2008	0.026 ± 0.002	0.022 ± 0.002	0.023 ± 0.002	0.026 ± 0.002	0.026 ± 0.002	0.024 ± 0.002	0.023 ± 0.002	0.024 ± 0.002	0.021 ± 0.001
4/29/2008	0.018 ± 0.001	0.015 ± 0.001	0.015 ± 0.001	0.017 ± 0.001	0.018 ± 0.001	0.015 ± 0.001	0.017 ± 0.001	0.019 ± 0.001	0.018 ± 0.001
5/6/2008	0.019 ± 0.001	0.016 ± 0.001	0.021 ± 0.002	0.016 ± 0.001	0.017 ± 0.001	0.013 ± 0.001	0.017 ± 0.001	0.018 ± 0.001	0.016 ± 0.001
5/13/2008	0.013 ± 0.001	0.012 ± 0.001	0.014 ± 0.001	0.012 ± 0.001	0.013 ± 0.001	0.013 ± 0.001	0.010 ± 0.001	0.013 ± 0.001	0.012 ± 0.001
5/20/2008	0.010 ± 0.001	0.011 ± 0.001	0.011 ± 0.001	0.011 ± 0.001	0.011 ± 0.001	0.011 ± 0.001	0.011 ± 0.001	0.012 ± 0.001	0.013 ± 0.001
5/28/2008	0.007 ± 0.001	0.006 ± 0.001	0.007 ± 0.001	0.007 ± 0.001	0.007 ± 0.001	0.006 ± 0.001	0.007 ± 0.001	0.004 ± 0.001	0.008 ± 0.001
6/3/2008	0.015 ± 0.001	0.013 ± 0.001	0.011 ± 0.001	0.016 ± 0.001	0.012 ± 0.001	0.012 ± 0.001	0.013 ± 0.001	0.015 ± 0.001	0.015 ± 0.001
6/10/2008	0.013 ± 0.001	0.014 ± 0.001	0.011 ± 0.001	0.015 ± 0.001	0.011 ± 0.001	0.012 ± 0.001	0.012 ± 0.001	0.012 ± 0.001	0.014 ± 0.001
6/17/2008	0.017 ± 0.001	0.014 ± 0.001	0.013 ± 0.001	0.015 ± 0.001	0.014 ± 0.001	0.013 ± 0.001	0.014 ± 0.001	0.014 ± 0.001	0.015 ± 0.001
6/24/2008	0.010 ± 0.001	0.008 ± 0.001	0.009 ± 0.001	0.010 ± 0.001	0.009 ± 0.001	0.012 ± 0.001	0.007 ± 0.001	0.007 ± 0.001	0.008 ± 0.001

* Sample location required by ODCM

** Optional sample location

TABLE 6-5 (Continued)
NMPNS/JAF SITE
ENVIRONMENTAL AIRBORNE PARTICULATE SAMPLES - OFFSITE SAMPLE LOCATIONS
GROSS BETA ACTIVITY pCi/ m³ ± 1 Sigma

Week End Date	R-1 *	R-2 *	R-3 *	R-4 *	R-5 *	D-2 **	E **	F **	G **
7/1/2008	0.016 ± 0.001	0.013 ± 0.001	0.013 ± 0.001	0.016 ± 0.001	0.011 ± 0.001	0.013 ± 0.001	0.014 ± 0.001	0.014 ± 0.001	0.015 ± 0.001
7/8/2008	0.014 ± 0.001	0.014 ± 0.001	0.014 ± 0.001	0.017 ± 0.001	0.014 ± 0.001	0.015 ± 0.001	0.015 ± 0.001	0.015 ± 0.001	0.015 ± 0.001
7/15/2008	0.010 ± 0.001	0.013 ± 0.001	0.014 ± 0.001	0.016 ± 0.001	0.016 ± 0.001	0.012 ± 0.001	0.012 ± 0.001	0.015 ± 0.001	0.013 ± 0.001
7/22/2008	0.025 ± 0.002	0.027 ± 0.002	0.024 ± 0.002	0.023 ± 0.002	0.021 ± 0.001	0.022 ± 0.002	0.023 ± 0.002	0.023 ± 0.002	0.028 ± 0.002
7/29/2008	0.013 ± 0.001	0.014 ± 0.001	0.016 ± 0.001	0.016 ± 0.001	0.014 ± 0.001	0.013 ± 0.001	0.014 ± 0.001	0.012 ± 0.001	0.017 ± 0.001
8/5/2008	0.012 ± 0.001	0.012 ± 0.001	0.012 ± 0.001	0.013 ± 0.001	0.011 ± 0.001	0.013 ± 0.001	0.012 ± 0.001	0.014 ± 0.001	0.013 ± 0.001
8/12/2008	0.013 ± 0.001	0.013 ± 0.001	0.012 ± 0.001	0.011 ± 0.001	0.009 ± 0.001	0.010 ± 0.001	0.013 ± 0.001	0.013 ± 0.001	0.015 ± 0.001
8/19/2008	0.017 ± 0.001	0.015 ± 0.001	0.017 ± 0.001	0.014 ± 0.001	0.014 ± 0.001	0.014 ± 0.001	0.016 ± 0.001	0.013 ± 0.001	0.015 ± 0.001
8/26/2008	0.014 ± 0.001	0.017 ± 0.001	0.013 ± 0.001	0.015 ± 0.001	0.015 ± 0.001	0.013 ± 0.001	0.012 ± 0.001	0.012 ± 0.001	0.015 ± 0.001
9/3/2008	0.014 ± 0.001	0.017 ± 0.001	0.014 ± 0.001	0.015 ± 0.001	0.015 ± 0.002	0.013 ± 0.001	0.016 ± 0.001	0.013 ± 0.001	0.017 ± 0.001
9/9/2008	0.021 ± 0.002	0.020 ± 0.002	0.023 ± 0.002	0.019 ± 0.002	0.020 ± 0.002	0.022 ± 0.002	0.017 ± 0.002	0.020 ± 0.002	0.023 ± 0.002
9/16/2008	0.011 ± 0.001	0.013 ± 0.001	0.009 ± 0.001	0.011 ± 0.001	0.011 ± 0.001	0.010 ± 0.001	0.009 ± 0.001	0.010 ± 0.001	0.012 ± 0.001
9/23/2008	0.013 ± 0.001	0.013 ± 0.001	0.010 ± 0.001	0.013 ± 0.001	0.013 ± 0.001	0.014 ± 0.001	0.011 ± 0.001	0.011 ± 0.001	0.015 ± 0.001
9/30/2008	0.018 ± 0.002	0.013 ± 0.001	0.016 ± 0.002	0.017 ± 0.002	0.013 ± 0.001	0.013 ± 0.001	0.015 ± 0.001	0.014 ± 0.001	0.015 ± 0.001
10/7/2008	0.007 ± 0.001	0.007 ± 0.001	0.007 ± 0.001	0.008 ± 0.001	0.007 ± 0.001	0.008 ± 0.001	0.009 ± 0.001	0.008 ± 0.001	0.009 ± 0.001
10/14/2008	0.025 ± 0.002	0.022 ± 0.002	0.020 ± 0.001	0.020 ± 0.001	0.021 ± 0.002	0.021 ± 0.001	0.019 ± 0.001	0.019 ± 0.001	0.024 ± 0.002
10/21/2008	0.013 ± 0.001	0.011 ± 0.001	0.012 ± 0.001	0.012 ± 0.001	0.012 ± 0.001	0.012 ± 0.001	0.012 ± 0.001	0.014 ± 0.001	0.014 ± 0.001
10/28/2008	0.010 ± 0.001	0.011 ± 0.001	0.009 ± 0.001	0.004 ± 0.001	0.010 ± 0.001	0.010 ± 0.001	0.010 ± 0.001	0.010 ± 0.001	0.012 ± 0.001
11/4/2008	0.018 ± 0.001	0.018 ± 0.001	0.019 ± 0.001	0.018 ± 0.001	0.017 ± 0.001	0.017 ± 0.001	0.015 ± 0.001	0.015 ± 0.001	0.017 ± 0.001
11/12/2008	0.023 ± 0.001	0.021 ± 0.001	0.021 ± 0.001	0.023 ± 0.001	0.022 ± 0.001	0.018 ± 0.001	0.020 ± 0.001	0.018 ± 0.001	0.023 ± 0.001
11/18/2008	0.012 ± 0.001	0.013 ± 0.001	0.011 ± 0.001	0.012 ± 0.001	0.014 ± 0.001	0.011 ± 0.001	0.012 ± 0.001	0.012 ± 0.001	0.008 ± 0.001
11/25/2008	0.011 ± 0.001	0.011 ± 0.001	0.011 ± 0.001	0.012 ± 0.001	0.011 ± 0.001	0.010 ± 0.001	0.010 ± 0.001	0.010 ± 0.001	0.012 ± 0.001
12/2/2008	0.015 ± 0.001	0.015 ± 0.001	0.017 ± 0.001	0.013 ± 0.001	0.013 ± 0.001	0.017 ± 0.001	0.016 ± 0.001	0.014 ± 0.001	0.014 ± 0.001
12/9/2008	0.018 ± 0.001	0.017 ± 0.001	0.016 ± 0.001	0.015 ± 0.001	0.016 ± 0.001	0.016 ± 0.001	0.018 ± 0.001	0.013 ± 0.001	0.014 ± 0.001
12/16/2008	0.019 ± 0.001	0.018 ± 0.001	0.016 ± 0.001	0.020 ± 0.001	0.017 ± 0.001	0.016 ± 0.001	0.018 ± 0.001	0.017 ± 0.001	0.019 ± 0.001
12/23/2008	0.022 ± 0.002	0.021 ± 0.002	0.021 ± 0.001	0.019 ± 0.001	0.023 ± 0.002	0.021 ± 0.001	0.022 ± 0.002	0.020 ± 0.001	0.023 ± 0.002
12/30/2008	0.026 ± 0.002	0.030 ± 0.002	0.025 ± 0.002	0.026 ± 0.002	0.031 ± 0.002	0.026 ± 0.002	0.027 ± 0.002	0.032 ± 0.002	0.026 ± 0.002

* Sample location required by ODCM

** Optional sample location

TABLE 6-6
NMPNS/JAF SITE
ENVIRONMENTAL AIRBORNE PARTICULATE SAMPLES - ONSITE SAMPLE LOCATIONS
GROSS BETA ACTIVITY pCi/ m³ ± 1 Sigma

Week End Date	D-1 **	G **	H **	I **	J **	K **
1/7/2008	0.019 ± 0.002	0.020 ± 0.002	0.022 ± 0.002	0.022 ± 0.002	0.017 ± 0.001	0.020 ± 0.002
1/14/2008	0.010 ± 0.001	0.014 ± 0.001	0.014 ± 0.001	0.011 ± 0.001	0.014 ± 0.001	0.012 ± 0.001
1/21/2008	0.018 ± 0.001	0.016 ± 0.001	0.019 ± 0.002	0.019 ± 0.002	0.016 ± 0.001	0.018 ± 0.001
1/28/2008	0.022 ± 0.002	0.021 ± 0.002	0.021 ± 0.002	0.018 ± 0.001	0.023 ± 0.002	0.023 ± 0.002
2/4/2008	0.024 ± 0.002	0.022 ± 0.002	0.026 ± 0.002	0.023 ± 0.002	0.019 ± 0.001	0.020 ± 0.002
2/11/2008	0.017 ± 0.001	0.016 ± 0.001	0.021 ± 0.001	0.014 ± 0.001	0.016 ± 0.001	0.019 ± 0.001
2/18/2008	0.022 ± 0.002	0.023 ± 0.002	0.021 ± 0.001	0.021 ± 0.001	0.023 ± 0.002	0.023 ± 0.002
2/25/2008	0.019 ± 0.001	0.018 ± 0.001	0.019 ± 0.001	0.014 ± 0.001	0.020 ± 0.001	0.018 ± 0.001
3/3/2008	0.017 ± 0.001	0.017 ± 0.001	0.014 ± 0.001	0.018 ± 0.001	0.017 ± 0.001	0.015 ± 0.001
3/10/2008	0.016 ± 0.001	0.017 ± 0.001	0.018 ± 0.001	0.017 ± 0.001	0.020 ± 0.001	0.018 ± 0.001
3/17/2008	0.015 ± 0.001	0.016 ± 0.001	0.019 ± 0.002	0.015 ± 0.001	0.012 ± 0.001	0.015 ± 0.001
3/24/2008	0.015 ± 0.001	0.014 ± 0.001	0.013 ± 0.001	0.017 ± 0.001	0.019 ± 0.001	0.014 ± 0.001
3/31/2008	0.014 ± 0.001	0.016 ± 0.001	0.018 ± 0.001	0.017 ± 0.001	0.014 ± 0.001	0.016 ± 0.001
4/7/2008	0.015 ± 0.001	0.013 ± 0.001	0.013 ± 0.001	0.014 ± 0.001	0.014 ± 0.001	0.016 ± 0.001
4/14/2008	0.010 ± 0.001	0.009 ± 0.001	0.010 ± 0.001	0.006 ± 0.001	0.008 ± 0.001	0.008 ± 0.001
4/21/2008	0.021 ± 0.002	0.018 ± 0.001	0.016 ± 0.001	0.021 ± 0.002	0.022 ± 0.002	0.021 ± 0.002
4/28/2008	0.020 ± 0.002	0.023 ± 0.002	0.021 ± 0.002	0.021 ± 0.002	0.018 ± 0.001	0.022 ± 0.002
5/5/2008	0.014 ± 0.001	0.014 ± 0.001	0.015 ± 0.001	0.015 ± 0.001	0.014 ± 0.001	0.016 ± 0.001
5/12/2008	0.016 ± 0.001	0.013 ± 0.001	0.015 ± 0.001	0.012 ± 0.001	0.014 ± 0.001	0.012 ± 0.001
5/19/2008	0.012 ± 0.001	0.011 ± 0.001	0.011 ± 0.001	0.012 ± 0.001	0.011 ± 0.001	0.009 ± 0.001
5/27/2008	0.007 ± 0.001	0.009 ± 0.001	0.007 ± 0.001	0.013 ± 0.001	0.008 ± 0.001	0.009 ± 0.001
6/2/2008	0.011 ± 0.001	0.011 ± 0.001	0.010 ± 0.001	0.014 ± 0.001	0.013 ± 0.001	0.014 ± 0.001
6/9/2008	0.015 ± 0.001	0.013 ± 0.001	0.013 ± 0.001	0.012 ± 0.001	0.012 ± 0.001	0.013 ± 0.001
6/16/2008	0.014 ± 0.001	0.012 ± 0.001	0.016 ± 0.001	0.011 ± 0.001	0.012 ± 0.001	0.014 ± 0.001
6/23/2008	0.010 ± 0.001	0.009 ± 0.001	0.010 ± 0.001	0.012 ± 0.001	0.010 ± 0.001	0.009 ± 0.001
6/30/2008	0.018 ± 0.001	0.016 ± 0.001	0.014 ± 0.001	0.014 ± 0.001	0.017 ± 0.001	0.015 ± 0.001

** Optional sample location

TABLE 6-6 (Continued)
NMPNS/JAF SITE
ENVIRONMENTAL AIRBORNE PARTICULATE SAMPLES - ONSITE SAMPLE LOCATIONS
GROSS BETA ACTIVITY pCi/ m³ ± 1 Sigma

Week End Date	D-1 **	G **	H **	I **	J **	K **
7/7/2008	0.014 ± 0.001	0.015 ± 0.001	0.014 ± 0.001	0.013 ± 0.001	0.015 ± 0.001	0.012 ± 0.001
7/14/2008	0.014 ± 0.001	0.014 ± 0.001	0.016 ± 0.001	0.018 ± 0.001	0.014 ± 0.001	0.017 ± 0.001
7/21/2008	0.023 ± 0.002	0.024 ± 0.002	0.023 ± 0.002	0.025 ± 0.002	0.023 ± 0.002	0.022 ± 0.001
7/28/2008	0.017 ± 0.001	0.016 ± 0.001	0.014 ± 0.001	0.015 ± 0.001	0.016 ± 0.001	0.015 ± 0.001
8/4/2008	0.018 ± 0.001	0.014 ± 0.001	0.010 ± 0.001	0.014 ± 0.001	0.013 ± 0.001	0.015 ± 0.001
8/11/2008	0.008 ± 0.001	0.016 ± 0.001	0.012 ± 0.001	0.011 ± 0.001	0.012 ± 0.001	0.013 ± 0.001
8/18/2008	0.012 ± 0.001	0.014 ± 0.001	0.016 ± 0.001	0.015 ± 0.001	0.013 ± 0.001	0.015 ± 0.001
8/25/2008	0.015 ± 0.001	0.018 ± 0.001	0.019 ± 0.001	0.015 ± 0.001	0.019 ± 0.001	0.015 ± 0.001
9/2/2008	0.015 ± 0.001	0.012 ± 0.001	0.016 ± 0.001	0.014 ± 0.001	0.013 ± 0.001	0.011 ± 0.001
9/8/2008	0.022 ± 0.002	0.021 ± 0.002	0.019 ± 0.002	0.022 ± 0.002	0.020 ± 0.002	0.019 ± 0.002
9/15/2008	0.015 ± 0.001	0.015 ± 0.001	0.013 ± 0.001	0.016 ± 0.001	0.016 ± 0.001	0.015 ± 0.001
9/22/2008	0.016 ± 0.001	0.012 ± 0.001	0.012 ± 0.002	0.015 ± 0.002	0.010 ± 0.001	0.012 ± 0.001
9/29/2008	0.019 ± 0.002	0.018 ± 0.002	0.017 ± 0.002	0.019 ± 0.002	0.016 ± 0.002	0.016 ± 0.002
10/6/2008	0.010 ± 0.001	0.008 ± 0.001	0.009 ± 0.001	0.008 ± 0.001	0.009 ± 0.001	0.010 ± 0.001
10/13/2008	0.015 ± 0.001	0.015 ± 0.001	0.016 ± 0.001	0.013 ± 0.001	0.014 ± 0.001	0.015 ± 0.001
10/20/2008	0.021 ± 0.001	0.017 ± 0.001	0.018 ± 0.001	0.019 ± 0.001	0.017 ± 0.001	0.018 ± 0.001
10/27/2008	0.012 ± 0.001	0.012 ± 0.001	0.013 ± 0.001	0.012 ± 0.001	0.012 ± 0.001	0.011 ± 0.001
11/3/2008	0.014 ± 0.001	0.016 ± 0.001	0.015 ± 0.001	0.013 ± 0.001	0.013 ± 0.001	0.014 ± 0.001
11/10/2008	0.028 ± 0.002	0.030 ± 0.002	0.030 ± 0.002	0.031 ± 0.002	0.032 ± 0.002	0.031 ± 0.002
11/17/2008	0.008 ± 0.001	0.011 ± 0.001	0.010 ± 0.001	0.007 ± 0.001	0.010 ± 0.001	0.008 ± 0.001
11/24/2008	0.009 ± 0.001	0.009 ± 0.001	0.009 ± 0.001	0.009 ± 0.001	0.009 ± 0.001	0.012 ± 0.001
12/1/2008	0.017 ± 0.001	0.015 ± 0.001	0.017 ± 0.001	0.016 ± 0.001	0.017 ± 0.001	0.015 ± 0.001
12/8/2008	0.016 ± 0.001	0.016 ± 0.001	0.016 ± 0.001	0.018 ± 0.001	0.015 ± 0.001	0.016 ± 0.001
12/15/2008	0.017 ± 0.001	0.016 ± 0.001	0.021 ± 0.001	0.018 ± 0.001	0.018 ± 0.001	0.022 ± 0.002
12/22/2008	0.023 ± 0.002	0.021 ± 0.001	0.022 ± 0.002	0.021 ± 0.001	0.021 ± 0.002	0.023 ± 0.002
12/29/2008	0.025 ± 0.002	0.025 ± 0.002	0.025 ± 0.002	0.029 ± 0.002	0.028 ± 0.002	0.026 ± 0.002

** Optional sample location

TABLE 6-7
NMPNS/JAF SITE
ENVIRONMENTAL CHARCOAL CARTRIDGE SAMPLES - OFFSITE SAMPLE LOCATIONS
I-131 ACTIVITY pCi/ m³ ± 1 Sigma

Week End Date	R-1 *	R-2 *	R-3 *	R-4 *	R-5 *	D-2 **	E **	F **	G **
01/02/08	< 0.007	< 0.027	< 0.033	< 0.033	< 0.037	< 0.009	< 0.022	< 0.028	< 0.021
01/08/08	< 0.039	< 0.028	< 0.021	< 0.031	< 0.037	< 0.027	< 0.032	< 0.038	< 0.024
01/15/08	< 0.028	< 0.014	< 0.009	< 0.016	< 0.021	< 0.023	< 0.009	< 0.021	< 0.035
01/22/08	< 0.030	< 0.033	< 0.029	< 0.023	< 0.026	< 0.027	< 0.018	< 0.033	< 0.016
01/29/08	< 0.039	< 0.028	< 0.032	< 0.017	< 0.038	< 0.025	< 0.034	< 0.018	< 0.038
02/05/08	< 0.035	< 0.023	< 0.025	< 0.017	< 0.022	No Sample	< 0.017	< 0.015	< 0.027
02/12/08	< 0.008	< 0.025	< 0.025	< 0.022	< 0.007	< 0.015	< 0.026	< 0.028	< 0.031
02/19/08	< 0.029	< 0.027	< 0.026	< 0.042	< 0.033	< 0.020	< 0.029	< 0.039	< 0.031
02/26/08	< 0.027	< 0.018	< 0.023	< 0.026	< 0.020	< 0.019	< 0.022	< 0.022	< 0.021
03/04/08	< 0.050	< 0.026	< 0.031	< 0.033	< 0.019	< 0.013	< 0.020	< 0.008	< 0.018
03/11/08	< 0.038	< 0.022	< 0.021	< 0.023	< 0.030	< 0.026	< 0.017	< 0.020	< 0.018
03/18/08	< 0.039	< 0.018	< 0.020	< 0.023	< 0.034	< 0.020	< 0.032	< 0.027	< 0.042
03/25/08	< 0.018	< 0.031	< 0.037	< 0.020	< 0.021	< 0.025	< 0.037	< 0.030	< 0.024
04/01/08	< 0.043	< 0.018	< 0.027	< 0.037	< 0.025	< 0.022	< 0.026	< 0.022	< 0.027
04/08/08	< 0.033	< 0.028	< 0.023	< 0.029	< 0.020	< 0.025	< 0.028	< 0.041	< 0.005
04/15/08	< 0.027	< 0.029	< 0.019	< 0.017	< 0.028	< 0.018	< 0.030	< 0.028	< 0.014
04/22/08	< 0.023	< 0.034	< 0.020	< 0.005	< 0.022	< 0.036	< 0.019	< 0.031	< 0.005
04/29/08	< 0.030	< 0.022	< 0.017	< 0.026	< 0.028	< 0.030	< 0.021	< 0.020	< 0.021
05/06/08	< 0.025	< 0.041	< 0.015	< 0.023	< 0.027	< 0.030	< 0.033	< 0.022	< 0.022
05/13/08	< 0.023	< 0.034	< 0.022	< 0.025	< 0.023	< 0.028	< 0.027	< 0.023	< 0.019
05/20/08	< 0.028	< 0.031	< 0.019	< 0.020	< 0.018	< 0.024	< 0.005	< 0.029	< 0.005
05/28/08	< 0.021	< 0.020	< 0.020	< 0.023	< 0.016	< 0.026	< 0.027	< 0.019	< 0.020
06/03/08	< 0.037	< 0.032	< 0.027	< 0.025	< 0.023	< 0.034	< 0.021	< 0.028	< 0.021
06/10/08	< 0.027	< 0.030	< 0.016	< 0.018	< 0.018	< 0.028	< 0.006	< 0.025	< 0.028
06/17/08	< 0.019	< 0.029	< 0.015	< 0.029	< 0.018	< 0.032	< 0.021	< 0.019	< 0.024
06/24/08	< 0.031	< 0.033	< 0.037	< 0.041	< 0.024	< 0.042	< 0.033	< 0.024	< 0.037

* Sample location required by ODCM

** Optional sample location

TABLE 6-7 (Continued)
NMPNS/JAF SITE
ENVIRONMENTAL CHARCOAL CARTRIDGE SAMPLES - OFFSITE SAMPLE LOCATIONS
I-131 ACTIVITY pCi/ m³ ± 1 Sigma

Week End Date	R-1 *	R-2 *	R-3 *	R-4 *	R-5 *	D-2 **	E **	F **	G **
07/01/08	< 0.031	< 0.015	< 0.016	< 0.035	< 0.023	< 0.034	< 0.023	< 0.026	< 0.028
07/08/08	< 0.020	< 0.013	< 0.018	< 0.018	< 0.019	< 0.031	< 0.015	< 0.017	< 0.018
07/15/08	< 0.024	< 0.028	< 0.019	< 0.025	< 0.025	< 0.024	< 0.022	< 0.019	< 0.027
07/22/08	< 0.024	< 0.023	< 0.027	< 0.005	< 0.021	< 0.023	< 0.018	< 0.023	< 0.022
07/29/08	< 0.022	< 0.022	< 0.013	< 0.017	< 0.020	< 0.027	< 0.026	< 0.026	< 0.013
08/05/08	< 0.035	< 0.015	< 0.026	< 0.033	< 0.014	< 0.029	< 0.020	< 0.023	< 0.020
08/12/08	< 0.026	< 0.048	< 0.019	< 0.023	< 0.022	< 0.020	< 0.021	< 0.044	< 0.022
08/19/08	< 0.019	< 0.027	< 0.025	< 0.024	< 0.040	< 0.023	< 0.017	< 0.022	< 0.028
08/26/08	< 0.026	< 0.023	< 0.006	< 0.022	< 0.027	< 0.029	< 0.017	< 0.021	< 0.017
09/03/08	< 0.020	< 0.021	< 0.023	< 0.022	< 0.038	< 0.018	< 0.016	< 0.022	< 0.022
09/09/08	< 0.033	< 0.027	< 0.028	< 0.032	< 0.049	< 0.016	< 0.047	< 0.042	< 0.049
09/16/08	< 0.021	< 0.022	< 0.033	< 0.035	< 0.024	< 0.025	< 0.023	< 0.034	< 0.028
09/23/08	< 0.044	< 0.023	< 0.019	< 0.029	< 0.027	< 0.031	< 0.022	< 0.020	< 0.024
09/30/08	< 0.024	< 0.024	< 0.035	< 0.030	< 0.034	< 0.034	< 0.032	< 0.032	< 0.028
10/07/08	< 0.034	< 0.020	< 0.024	< 0.025	< 0.026	< 0.039	< 0.023	< 0.019	< 0.024
10/14/08	< 0.034	< 0.043	< 0.014	< 0.023	< 0.023	< 0.028	< 0.031	< 0.041	< 0.014
10/21/08	< 0.036	< 0.015	< 0.005	< 0.033	< 0.006	< 0.022	< 0.026	< 0.023	< 0.024
10/28/08	< 0.021	< 0.030	< 0.015	< 0.016	< 0.021	< 0.014	< 0.026	< 0.017	< 0.011
11/04/08	< 0.022	< 0.041	< 0.027	< 0.019	< 0.025	< 0.027	< 0.032	< 0.020	< 0.042
11/12/08	< 0.021	< 0.023	< 0.015	< 0.013	< 0.020	< 0.028	< 0.020	< 0.020	< 0.013
11/18/08	< 0.029	< 0.036	< 0.023	< 0.025	< 0.035	< 0.039	< 0.030	< 0.030	< 0.035
11/25/08	< 0.023	< 0.034	< 0.012	< 0.022	< 0.025	< 0.021	< 0.025	< 0.017	< 0.026
12/02/08	< 0.004	< 0.030	< 0.012	< 0.017	< 0.019	< 0.027	< 0.022	< 0.026	< 0.025
12/09/08	< 0.017	< 0.033	< 0.020	< 0.009	< 0.015	< 0.020	< 0.021	< 0.018	< 0.028
12/16/08	< 0.020	< 0.018	< 0.014	< 0.016	< 0.018	< 0.023	< 0.024	< 0.028	< 0.016
12/23/08	< 0.015	< 0.021	< 0.012	< 0.015	< 0.018	< 0.021	< 0.020	< 0.012	< 0.025
12/30/08	< 0.019	< 0.019	< 0.013	< 0.015	< 0.027	< 0.015	< 0.018	< 0.024	< 0.025

* Sample location required by ODCM

** Optional sample location

TABLE 6-8
NMPNS/JAF SITE
ENVIRONMENTAL CHARCOAL CARTRIDGE SAMPLES - ONSITE SAMPLE LOCATIONS
I-131 ACTIVITY pCi/ m³ ± 1 Sigma

Week End Date	D-1 **	G **	H **	I **	J **	K **
01/07/08	< 0.023	< 0.020	< 0.019	< 0.021	< 0.027	< 0.025
01/14/08	< 0.008	< 0.023	< 0.027	< 0.021	< 0.023	< 0.024
01/21/08	< 0.030	< 0.021	< 0.017	< 0.034	< 0.022	< 0.025
01/28/08	< 0.023	< 0.026	< 0.024	< 0.020	< 0.026	< 0.024
02/04/08	< 0.029	< 0.020	< 0.028	< 0.020	< 0.021	< 0.023
02/11/08	< 0.029	< 0.026	< 0.028	< 0.027	< 0.024	< 0.013
02/18/08	< 0.036	< 0.033	< 0.035	< 0.022	< 0.018	< 0.022
02/25/08	< 0.021	< 0.021	< 0.033	< 0.016	< 0.005	< 0.026
03/03/08	< 0.017	< 0.027	< 0.048	< 0.005	< 0.019	< 0.038
03/10/08	< 0.034	< 0.014	< 0.025	< 0.015	< 0.041	< 0.020
03/17/08	< 0.048	< 0.020	< 0.019	< 0.025	< 0.040	< 0.027
03/24/08	< 0.055	< 0.035	< 0.016	< 0.030	< 0.055	< 0.018
03/31/08	< 0.047	< 0.022	< 0.021	< 0.032	< 0.033	< 0.015
04/07/08	< 0.024	< 0.047	< 0.019	< 0.025	< 0.015	< 0.029
04/14/08	< 0.029	< 0.032	< 0.020	< 0.041	< 0.022	< 0.032
04/21/08	< 0.027	< 0.022	< 0.029	< 0.023	< 0.023	< 0.023
04/28/08	< 0.032	< 0.032	< 0.023	< 0.025	< 0.026	< 0.022
05/05/08	< 0.034	< 0.026	< 0.010	< 0.026	< 0.005	< 0.031
05/12/08	< 0.023	< 0.019	< 0.019	< 0.026	< 0.029	< 0.032
05/19/08	< 0.023	< 0.027	< 0.023	< 0.014	< 0.023	< 0.034
05/27/08	< 0.020	< 0.031	< 0.014	< 0.020	< 0.014	< 0.013
06/02/08	< 0.026	< 0.043	< 0.025	< 0.030	< 0.030	< 0.039
06/09/08	< 0.029	< 0.019	< 0.028	< 0.016	< 0.028	< 0.034
06/16/08	< 0.024	< 0.026	< 0.022	< 0.020	< 0.019	< 0.019
06/23/08	< 0.023	< 0.026	< 0.021	< 0.020	< 0.019	< 0.022
06/30/08	< 0.029	< 0.021	< 0.005	< 0.026	< 0.023	< 0.024

** Optional sample location

TABLE 6-8 (Continued)
NMPNS/JAF SITE
ENVIRONMENTAL CHARCOAL CARTRIDGE SAMPLES - ONSITE SAMPLE LOCATIONS
I-131 ACTIVITY pCi/ m³ ± 1 Sigma

Week End Date	D-1 **	G **	H **	I **	J **	K **
07/07/08	< 0.027	< 0.035	< 0.015	< 0.014	< 0.022	< 0.021
07/14/08	< 0.032	< 0.022	< 0.017	< 0.034	< 0.030	< 0.026
07/21/08	< 0.021	< 0.033	< 0.021	< 0.020	< 0.025	< 0.032
07/28/08	< 0.018	< 0.031	< 0.018	< 0.020	< 0.021	< 0.017
08/04/08	< 0.026	< 0.022	< 0.027	< 0.029	< 0.022	< 0.024
08/11/08	< 0.021	< 0.036	< 0.006	< 0.024	< 0.035	< 0.030
08/18/08	< 0.016	< 0.035	< 0.015	< 0.017	< 0.030	< 0.022
08/25/08	< 0.026	< 0.026	< 0.017	< 0.026	< 0.014	< 0.023
09/02/08	< 0.018	< 0.017	< 0.020	< 0.016	< 0.031	< 0.016
09/08/08	< 0.040	< 0.031	< 0.030	< 0.024	< 0.034	< 0.023
09/15/08	< 0.035	< 0.019	< 0.023	< 0.019	< 0.036	< 0.025
09/22/08	< 0.034	< 0.005	< 0.030	< 0.062	< 0.030	< 0.032
09/29/08	< 0.032	< 0.029	< 0.028	< 0.029	< 0.031	< 0.037
10/06/08	< 0.018	< 0.027	< 0.047	< 0.025	< 0.018	< 0.024
10/13/08	< 0.023	< 0.033	< 0.020	< 0.018	< 0.030	< 0.036
10/20/08	< 0.031	< 0.034	< 0.026	< 0.029	< 0.029	< 0.022
10/27/08	< 0.025	< 0.021	< 0.017	< 0.019	< 0.023	< 0.024
11/03/08	< 0.017	< 0.037	< 0.021	< 0.026	< 0.030	< 0.019
11/10/08	< 0.022	< 0.034	< 0.021	< 0.017	< 0.025	< 0.018
11/17/08	< 0.019	< 0.034	< 0.032	< 0.033	< 0.032	< 0.028
11/24/08	< 0.021	< 0.040	< 0.027	< 0.020	< 0.020	< 0.032
12/01/08	< 0.023	< 0.015	< 0.029	< 0.017	< 0.035	< 0.023
12/08/08	< 0.028	< 0.016	< 0.034	< 0.018	< 0.023	< 0.024
12/15/08	< 0.019	< 0.021	< 0.016	< 0.016	< 0.023	< 0.023
12/22/08	< 0.018	< 0.022	< 0.014	< 0.016	< 0.024	< 0.024
12/29/08	< 0.019	< 0.036	< 0.021	< 0.015	< 0.019	< 0.023

** Optional sample location

TABLE 6-9
CONCENTRATIONS OF GAMMA EMITTERS IN QUARTERLY COMPOSITES
 Results in Units of 10E-3 pCi/ m³ ± 1 Sigma

OFFSITE SAMPLE LOCATIONS - 1ST QTR

	R-1 *	R-2 *	R-3 *	R-4 *	R-5 *	D-2 **	E **	F **	G **
Be-7	115.4 +/- 14.0	106.6 +/- 12.8	124.3 +/- 14.3	122.6 +/- 13.7	128.9 +/- 13.9	115.1 +/- 17.0	95.8 +/- 12.9	120.6 +/- 12.9	158.8 +/- 15.4
Cs-134	< 2.0	< 1.4	< 1.6	< 1.8	< 1.7	< 2.1	< 1.4	< 2.2	< 2.1
Cs-137	< 1.7	< 1.5	< 1.8	< 1.5	< 1.2	< 1.8	< 0.3	< 1.8	< 0.9
Zr-95	< 3.3	< 3.7	< 3.6	< 5.1	< 2.4	< 5.6	< 2.6	< 4.3	< 5.7
Nb-95	< 2.7	< 2.7	< 2.3	< 2.8	< 2.4	< 1.2	< 2.1	< 3.5	< 4.0
Co-58	< 2.0	< 1.6	< 1.6	< 1.9	< 2.0	< 2.8	< 2.3	< 1.4	< 2.0
Mn-54	< 1.6	< 1.4	< 1.2	< 2.2	< 1.5	< 3.2	< 1.4	< 1.3	< 1.9
Zn-65	< 3.1	< 0.9	< 5.5	< 5.9	< 3.4	< 6.2	< 4.0	< 2.9	< 1.1
Co-60	< 0.6	< 1.3	< 2.5	< 1.7	< 1.3	< 3.5	< 1.6	< 1.4	< 1.7
K-40	< 5.9	< 13.5	51.7 +/- 10.8	48.7 +/- 9.4	< 16.8	75.1 +/- 15.3	< 5.9	< 14.3	< 22.1

* Sample location required by ODCM

** Optional sample location

OFFSITE SAMPLE LOCATIONS - 2ND QTR

	R-1 *	R-2 *	R-3 *	R-4 *	R-5 *	D-2 **	E **	F **	G **
Be-7	116.0 +/- 12.1	84.4 +/- 14.1	104.3 +/- 11.8	116.9 +/- 12.1	121.4 +/- 13.3	108.5 +/- 13.3	125.4 +/- 13.1	120.2 +/- 17.2	115.5 +/- 12.2
Cs-134	< 1.6	< 1.9	< 2.2	< 1.6	< 1.8	< 2.3	< 1.9	< 2.0	< 1.9
Cs-137	< 0.7	< 2.0	< 1.2	< 0.7	< 1.4	< 1.4	< 1.4	< 1.5	< 0.8
Zr-95	< 2.2	< 4.3	< 0.9	< 3.2	< 3.9	< 3.9	< 4.1	< 4.5	< 0.9
Nb-95	< 3.0	< 2.8	< 2.3	< 2.6	< 3.2	< 3.4	< 3.3	< 3.7	< 1.8
Co-58	< 2.1	< 3.8	< 1.4	< 1.2	< 1.7	< 2.7	< 1.3	< 3.0	< 1.7
Mn-54	< 1.5	< 2.1	< 1.2	< 1.3	< 1.2	< 1.7	< 1.5	< 2.1	< 1.2
Zn-65	< 4.3	< 5.6	< 4.1	< 4.1	< 3.3	< 4.2	< 4.0	< 7.7	< 1.0
Co-60	< 1.8	< 0.8	< 0.5	< 1.6	< 1.4	< 1.7	< 1.2	< 2.7	< 1.8
K-40	< 12.0	96.3 +/- 18.0	< 5.2	< 15.7	< 15.1	34.8 +/- 8.0	< 20.0	96.5 +/- 19.3	< 17.7

* Sample location required by ODCM

** Optional sample location

TABLE 6-9 (Continued)
CONCENTRATIONS OF GAMMA EMITTERS IN QUARTERLY COMPOSITES
 Results in Units of $10E-3 \text{ pCi/ m}^3 \pm 1 \text{ Sigma}$

OFFSITE SAMPLE LOCATIONS - 3RD QTR

Nuclide	R-1 *	R-2 *	R-3 *	R-4 *	R-5 *	D-2 **	E **	F **	G **
Be-7	94.5 +/- 14.5	115.0 +/- 12.2	140.4 +/- 12.9	104.7 +/- 12.2	97.0 +/- 12.5	102.2 +/- 12.6	141.2 +/- 17.6	107.9 +/- 11.8	124.9 +/- 13.4
Cs-134	<2.5	< 1.4	< 1.5	< 1.6	< 1.7	<1.9	<1.9	< 1.7	< 1.1
Cs-137	<1.8	< 1.0	< 0.9	< 1.0	< 1.4	<1.0	<2.1	< 0.8	< 1.2
Zr-95	<3.5	< 3.7	< 2.9	< 3.7	< 5.5	<3.8	<4.4	< 2.9	< 3.2
Nb-95	<5.5	< 1.9	< 2.3	< 0.7	< 3.4	<2.8	<5.0	< 1.9	< 2.2
Co-58	<2.9	< 2.4	< 1.9	< 2.3	< 1.4	<2.1	<3.2	< 1.4	< 1.8
Mn-54	<1.8	< 1.2	< 0.9	< 1.0	< 1.8	<1.9	<2.1	< 1.0	< 1.1
Zn-65	<7.0	< 2.8	< 4.2	< 3.5	< 2.9	<4.7	<6.9	< 3.5	< 4.0
Co-60	<0.8	< 1.4	< 1.9	< 1.5	< 0.6	<1.5	<2.1	< 1.8	< 1.2
K-40	84.4 +/- 17.3	<14.1	<16.2	41.9 +/- 9.1	63.7 +/- 11.5	51.4 +/- 10.4	101.3 +/- 17.8	<23.1	<12.3

* Sample location required by ODCM

** Optional sample location

OFFSITE SAMPLE LOCATIONS - 4TH QTR

Nuclide	R-1 *	R-2 *	R-3 *	R-4 *	R-5 *	D-2 **	E **	F **	G **
Be-7	91.9 +/- 11.8	54.2 +/- 11.3	92.0 +/- 13.8	91.9 +/- 11.7	71.0 +/- 10.1	74.2 +/- 10.7	90.7 +/- 11.5	92.7 +/- 11.4	64.7 +/- 11.2
Cs-134	<2.1	< 1.5	< 2.4	< 1.8	< 1.5	<1.8	<2.2	< 2.3	< 1.9
Cs-137	<1.8	< 1.1	< 1.8	< 1.0	< 1.0	<0.8	<1.9	< 1.4	< 1.3
Zr-95	<2.9	< 3.7	< 5.6	< 2.3	< 2.8	<4.0	<5.5	< 4.7	< 2.1
Nb-95	<4.8	< 3.5	< 4.1	< 3.3	< 2.7	<2.9	<3.7	< 4.0	< 3.6
Co-58	<2.5	< 1.3	< 2.5	< 2.0	< 1.9	<1.7	<2.4	< 2.2	< 1.5
Mn-54	<1.3	< 1.3	< 2.5	< 1.2	< 1.3	<2.0	<1.7	< 1.9	< 1.6
Zn-65	<4.1	< 4.7	< 5.6	< 5.3	< 4.1	<3.8	<4.3	< 4.1	< 4.2
Co-60	<2.0	< 1.5	< 0.8	< 2.3	< 1.6	<1.8	<2.4	< 1.2	< 1.9
K-40	55.1 +/- 10.1	<12.0	72.8 +/- 14.3	<13.9	<12.6	<5.1	41.5 +/- 10.0	62.2 +/- 10.0	<16.7

* Sample location required by ODCM

** Optional sample location

TABLE 6-9 (Continued)
CONCENTRATIONS OF GAMMA EMITTERS IN QUARTERLY COMPOSITES
Results in Units of 10E-3 pCi/ m³ ± 1 Sigma

ONSITE SAMPLE LOCATIONS - 1ST QTR

Nuclide	D-1 **	G **	H **	I **	J **	K **
Be-7	113.1 +/- 13.6	107.0 +/- 12.6	110.4 +/- 13.7	123.7 +/- 14.1	95.4 +/- 11.6	124.1 +/- 16.6
Cs-134	< 1.1	< 1.8	< 1.7	< 1.4	< 1.4	< 2.3
Cs-137	< 1.2	< 1.2	< 0.3	< 1.2	< 1.2	< 1.6
Zr-95	< 4.2	< 0.9	< 3.6	< 6.6	< 2.3	< 4.0
Nb-95	< 0.8	< 2.0	< 3.8	< 2.8	< 3.1	< 4.8
Co-58	< 0.6	< 2.0	< 2.3	< 2.8	< 1.9	< 3.3
Mn-54	< 1.4	< 1.8	< 1.7	< 1.9	< 1.2	< 2.1
Zn-65	< 3.1	< 2.8	< 5.8	< 4.8	< 4.1	< 5.5
Co-60	< 1.6	< 1.3	< 2.1	< 2.5	< 0.5	< 3.6
K-40	< 15.8	< 5.1	< 5.9	54.7 +/- 11.9	< 16.3	56.8 +/- 13.4

ONSITE SAMPLE LOCATIONS - 2ND QTR

Nuclide	D-1 **	G **	H **	I **	J **	K **
Be-7	107.3 +/- 12.5	116.1 +/- 13.6	127.6 +/- 13.7	128.3 +/- 12.8	110.1 +/- 12.3	88.9 +/- 13.5
Cs-134	< 1.6	< 1.9	< 1.7	< 1.4	< 1.7	< 2.5
Cs-137	< 1.0	< 1.5	< 1.2	< 1.3	< 1.2	< 1.5
Zr-95	< 3.4	< 5.3	< 4.3	< 3.4	< 2.5	< 4.5
Nb-95	< 2.8	< 3.7	< 3.5	< 3.6	< 0.8	< 4.0
Co-58	< 1.3	< 2.8	< 1.9	< 2.1	< 2.1	< 2.7
Mn-54	< 1.2	< 1.5	< 2.0	< 1.7	< 1.0	< 1.8
Zn-65	< 2.9	< 4.6	< 4.0	< 2.9	< 4.8	< 4.4
Co-60	< 1.6	< 2.5	< 1.2	< 1.6	< 2.2	< 1.5
K-40	< 12.3	< 16.0	49.9 +/- 11.2	< 18.1	< 15.6	52.7 +/- 10.6

** Optional sample location

TABLE 6-9 (Continued)
CONCENTRATIONS OF GAMMA EMITTERS IN QUARTERLY COMPOSITES
Results in Units of 10E-3 pCi/ m³ ± 1 Sigma

ONSITE SAMPLE LOCATIONS - 3RD QTR

Nuclide	D-1 **	G **	H **	I **	J **	K **
Be-7	111.3 +/- 16.0	92.4 +/- 12.1	93.0 +/- 12.1	94.4 +/- 12.8	110.5 +/- 13.0	111.3 +/- 12.8
Cs-134	< 2.5	< 1.2	< 1.6	< 1.6	< 1.9	< 1.7
Cs-137	< 1.8	< 0.8	< 1.3	< 1.2	< 0.9	< 1.6
Zr-95	< 6.1	< 3.4	< 3.3	< 4.1	< 2.7	< 3.5
Nb-95	< 5.0	< 1.9	< 3.3	< 2.1	< 2.2	< 3.5
Co-58	< 2.5	< 0.5	< 1.3	< 1.8	< 2.0	< 2.6
Mn-54	< 2.3	< 0.4	< 1.3	< 1.0	< 1.8	< 1.7
Zn-65	< 3.8	< 2.8	< 4.9	< 4.5	< 4.6	< 4.5
Co-60	< 3.0	< 0.5	< 2.1	< 0.5	< 2.0	< 1.4
K-40	69.3 +/- 16.1	< 21.0	< 12.8	< 23.3	< 16.1	67.6 +/- 11.6

ONSITE SAMPLE LOCATIONS - 4TH QTR

Nuclide	D-1 **	G **	H **	I **	J **	K **
Be-7	82.8 +/- 10.5	82.0 +/- 14.5	95.1 +/- 11.2	76.6 +/- 11.3	91.0 +/- 11.6	73.6 +/- 11.6
Cs-134	< 1.3	< 1.5	< 1.7	< 1.6	< 1.8	< 2.2
Cs-137	< 1.5	< 1.1	< 1.2	< 0.8	< 1.2	< 1.3
Zr-95	< 3.4	< 5.9	< 3.7	< 3.6	< 4.3	< 4.2
Nb-95	< 2.2	< 4.4	< 2.4	< 2.3	< 3.2	< 3.5
Co-58	< 1.7	< 2.1	< 1.4	< 1.8	< 2.2	< 1.9
Mn-54	< 1.3	< 1.4	< 1.4	< 1.3	< 1.5	< 1.3
Zn-65	< 3.3	< 8.1	< 1.0	< 3.1	< 5.0	< 5.7
Co-60	< 2.1	< 2.1	< 1.4	< 1.2	< 1.5	< 0.6
K-40	< 16.3	66.6 +/- 13.9	< 20.3	< 12.2	< 20.5	< 15.1

** Optional sample location

TABLE 6-10
DIRECT RADIATION MEASUREMENT RESULTS
Results in Units of mrem/std. Month \pm 1 Sigma

Location Number	Location	First Quarter	Second Quarter	Third Quarter	Fourth Quarter	Direction & Distance (1)
3	D1 Onsite	12.58 \pm 0.51	13.63 \pm 0.79	9.96 \pm 0.39	13.83 \pm 0.57	69° at 0.2 miles
4	D2 Onsite	4.01 \pm 0.15	4.65 \pm 0.19	4.20 \pm 0.20	4.79 \pm 0.21	140° at 0.4 miles
5	E Onsite	4.15 \pm 0.25	4.98 \pm 0.26	4.35 \pm 0.24	4.86 \pm 0.18	175° at 0.4 miles
6	F Onsite	3.37 \pm 0.13	4.02 \pm 0.25	3.87 \pm 0.17	4.14 \pm 0.22	210° at 0.5 miles
7*	G Onsite	3.16 \pm 0.13	4.08 \pm 0.32	3.57 \pm 0.17	3.90 \pm 0.18	250° at 0.7 miles
8*	R5 Offsite Control	4.50 \pm 0.18	5.06 \pm 0.39	4.80 \pm 0.20	5.11 \pm 0.18	42° at 16.4 miles
9	D1 Offsite	3.34 \pm 0.14	4.21 \pm 0.23	3.97 \pm 0.13	4.36 \pm 0.23	80° at 11.4 miles
10	D2 Offsite	3.36 \pm 0.17	4.22 \pm 0.25	3.75 \pm 0.13	4.09 \pm 0.17	117° at 9.0 miles
11	E Offsite	3.37 \pm 0.15	4.08 \pm 0.21	3.83 \pm 0.17	4.17 \pm 0.24	160° at 7.2 miles
12	F- Offsite	3.44 \pm 0.15	4.22 \pm 0.35	3.88 \pm 0.15	4.21 \pm 0.17	190° at 7.7 miles
13	G Offsite	3.92 \pm 0.16	4.49 \pm 0.19	4.03 \pm 0.16	4.37 \pm 0.21	225° at 5.3 miles
14*	Demass Rd SW Oswego - Control	3.86 \pm 0.13	4.77 \pm 0.57	4.23 \pm 0.17	4.45 \pm 0.25	226° at 12.6 miles
15*	Pole 66 W Boundary - Bible Camp	3.50 \pm 0.12	3.99 \pm 0.18	3.70 \pm 0.16	4.02 \pm 0.17	237° at 0.9 miles
18*	Energy Info Center - Lamp Post SW	4.03 \pm 0.19	4.80 \pm 0.26	4.32 \pm 0.27	4.85 \pm 0.21	265° at 0.4 miles
19	East Boundary - JAF Pole 9	3.82 \pm 0.17	4.58 \pm 0.37	4.30 \pm 0.15	4.73 \pm 0.26	81° at 1.3 miles
23*	H Onsite	4.57 \pm 0.21	5.24 \pm 0.17	4.82 \pm 0.22	5.43 \pm 0.30	70° at 0.8 miles
24	I Onsite	3.85 \pm 0.11	4.66 \pm 0.53	4.26 \pm 0.17	4.61 \pm 0.16	98° at 0.8 miles
25	J Onsite	3.77 \pm 0.13	4.57 \pm 0.18	4.20 \pm 0.21	4.47 \pm 0.25	110° at 0.9 miles
26	K Onsite	3.68 \pm 0.15	4.53 \pm 0.39	4.16 \pm 0.18	4.40 \pm 0.18	132° at 0.5 miles
27	N Fence N of Switchyard JAF	19.99 \pm 1.09	19.89 \pm 1.44	16.00 \pm 0.60	21.39 \pm 1.10	60° at 0.4 miles
28	N Light Pole N of Screenhouse JAF	26.53 \pm 0.95	25.78 \pm 1.81	21.14 \pm 1.66	29.01 \pm 1.12	68° at 0.5 miles
29	N Fence N of W Side	24.13 \pm 1.40	23.03 \pm 0.94	17.89 \pm 1.31	23.88 \pm 1.34	65° at 0.5 miles

(1) Direction and distance based on NMP-2 reactor centerline.

* TLD required by ODCM

TABLE 6-10 (Continued)
DIRECT RADIATION MEASUREMENT RESULTS
Results in Units of mrem/std. Month \pm 1 Sigma

Location Number	Location	First Quarter	Second Quarter	Third Quarter	Fourth Quarter	Direction & Distance (1)
30	N Fence (NW) JAF	11.46 \pm 0.88	12.32 \pm 1.01	9.74 \pm 0.49	11.90 \pm 0.78	57° at 0.4 miles
31	N Fence (NW) NMP-1	6.81 \pm 0.27	7.55 \pm 0.38	6.94 \pm 0.27	7.77 \pm 0.34	276° at 0.2 miles
39	N Fence Rad Waste-NMP-1	8.76 \pm 0.38	9.75 \pm 0.64	9.00 \pm 0.27	9.90 \pm 0.55	292° at 0.2 miles
47	N Fence (NE) JAF	6.63 \pm 0.23	6.64 \pm 0.39	6.10 \pm 0.25	6.95 \pm 0.27	69° at 0.6 miles
49*	Phoenix NY-Control	3.32 \pm 0.12	3.71 \pm 0.19	3.58 \pm 0.17	3.70 \pm 0.15	163° at 19.8 miles
51	Liberty & Bronson Sts E of OSS	3.81 \pm 0.16	3.94 \pm 0.19	3.97 \pm 0.16	4.33 \pm 0.27	233° at 7.4 miles
52	E 12th & Cayuga Sts Oswego School	3.47 \pm 0.25	3.79 \pm 0.18	3.83 \pm 0.15	4.14 \pm 0.20	227° at 5.8 miles
53	Broadwell & Chestnut Sts Fulton HS	3.58 \pm 0.14	4.34 \pm 0.33	4.24 \pm 0.21	4.60 \pm 0.22	183° at 13.7 miles
54	Liberty St & Co Rt 16 Mexico HS	3.50 \pm 0.14	3.71 \pm 0.15	3.70 \pm 0.19	4.13 \pm 0.15	115° at 9.3 miles
55	Gas Substation Co Rt 5-Pulaski	3.28 \pm 0.12	3.92 \pm 0.36	3.77 \pm 0.14	4.08 \pm 0.17	75° at 13.0 miles
56*	Rt 104-New Haven Sch (SE Corner)	3.12 \pm 0.18	3.84 \pm 0.26	3.61 \pm 0.14	3.76 \pm 0.19	123° at 5.3 miles
58*	Co Rt 1A-Alcan (E of E Entrance Rd)	3.86 \pm 0.14	4.52 \pm 0.16	4.29 \pm 0.15	4.64 \pm 0.19	220° at 3.1 miles
75*	Unit 2 N Fence N of Reactor Bldg	6.69 \pm 0.19	7.05 \pm 0.43	6.98 \pm 0.25	7.89 \pm 0.43	5° at 0.1 miles
76*	Unit 2 N Fence N of Change House	5.03 \pm 0.29	5.85 \pm 0.26	5.29 \pm 0.20	6.17 \pm 0.25	25° at 0.1 miles
77*	Unit 2 N Fence N of Pipe Bldg	5.86 \pm 0.21	6.38 \pm 0.24	5.94 \pm 0.20	7.03 \pm 0.26	45° at 0.2 miles
78*	JAF E of E Old Lay Down Area	3.74 \pm 0.21	4.58 \pm 0.22	4.27 \pm 0.17	4.68 \pm 0.21	90° at 1.0 miles
79*	Co Rt 29 Pole #63 02 Mi S of Lake Rd	3.28 \pm 0.19	4.17 \pm 0.38	3.73 \pm 0.18	4.05 \pm 0.16	115° at 1.1 miles
80*	Co Rt 29 Pole #54 07 Mi S of Lake Rd	3.42 \pm 0.13	4.19 \pm 0.28	4.02 \pm 0.20	4.32 \pm 0.19	133° at 1.4 miles
81*	Miner Rd Pole #16 05 Mi W of Rt 29	3.56 \pm 0.16	4.14 \pm 0.16	3.88 \pm 0.18	4.22 \pm 0.26	159° at 1.6 miles

(1) Direction and distance based on NMP-2 reactor centerline.

* TLD required by ODCM

TABLE 6-10 (Continued)
DIRECT RADIATION MEASUREMENT RESULTS
 Results in Units of mrem/std. Month \pm 1 Sigma

Location Number	Location	First Quarter	Second Quarter	Third Quarter	Fourth Quarter	Direction & Distance (1)
82*	Miner Rd Pole # 1-1/2 11 Mi W of Rt 29	3.47 \pm 0.11	3.96 \pm 0.15	3.84 \pm 0.16	3.92 \pm 0.17	181° at 1.6 miles
83*	Lakeview Rd Tree 045 Mi N of Miner Rd	3.29 \pm 0.12	3.94 \pm 0.16	3.67 \pm 0.20	3.97 \pm 0.22	200° at 1.2 miles
84*	Lakeview Rd N Pole #6117 200ft N of Lake Rd	3.64 \pm 0.14	4.27 \pm 0.29	4.06 \pm 0.25	4.20 \pm 0.21	225° at 1.1 miles
85*	Unit 1 N Fence N of W Side of Screen House	7.53 \pm 0.31	8.70 \pm 0.62	7.85 \pm 0.34	8.66 \pm 0.46	294° at 0.2 miles
86*	Unit 2 N Fence N of W Side of Screen House	7.01 \pm 0.35	8.06 \pm 0.48	7.18 \pm 0.36	8.25 \pm 0.47	315° at 0.1 miles
87*	Unit 2 N Fence N of E Side of Screen House	7.10 \pm 0.29	8.24 \pm 0.25	7.34 \pm 0.44	8.84 \pm 0.42	341° at 0.1 miles
88*	Hickory Grove Rd Pole #2 06 Mi N of Rt 1	3.40 \pm 0.13	4.13 \pm 0.22	3.91 \pm 0.14	4.29 \pm 0.25	97° at 4.5 miles
89*	Leavitt Rd Pole #16 04 Mi S of Rt1	3.67 \pm 0.13	4.26 \pm 0.28	4.19 \pm 0.18	4.50 \pm 0.19	111° at 4.1 miles
90*	Rt 104 Pole #300 150 Ft E of Keefe Rd	3.25 \pm 0.12	3.94 \pm 0.30	3.49 \pm 0.18	4.17 \pm 0.23	135° at 4.2 miles
91*	Rt 51A Pole #59 08 Mi W of Rt 51	3.18 \pm 0.17	3.76 \pm 0.18	3.66 \pm 0.15	3.85 \pm 0.22	156° at 4.8 miles
92*	Maiden Lane Rd Power Pole 06 Mi S of Rt 104	3.68 \pm 0.22	4.46 \pm 0.17	4.29 \pm 0.19	4.46 \pm 0.21	183° at 4.4 miles
93*	Rt 53 Pole 1-1 120 Ft S of Rt 104	3.63 \pm 0.12	4.11 \pm 0.21	3.83 \pm 0.20	4.27 \pm 0.19	205° at 4.4 miles
94*	Rt 1 Pole #82 250 Ft E of Kocher Rd (Co Rt 63)	3.41 \pm 0.11	3.80 \pm 0.24	3.54 \pm 0.16	4.12 \pm 0.17	223° at 4.7 miles
95*	Alcan W Access Rd Joe Fultz Blvd Pole #21	3.23 \pm 0.14	3.48 \pm 0.17	3.37 \pm 0.15	3.84 \pm 0.19	237° at 4.1 miles
96*	Creamery Rd 03 Mi S of Middle Rd Pole 1-1/2	3.39 \pm 0.15	4.05 \pm 0.21	3.93 \pm 0.19	4.17 \pm 0.18	199° at 3.6 miles
97*	Rt 29 Pole #50 200 Ft N of Miner Rd	3.16 \pm 0.15	3.90 \pm 0.24	3.98 \pm 0.16	4.13 \pm 0.21	143° at 1.8 miles
98	Lake Rd Pole #145 015 Mi E of Rt 29	3.52 \pm 0.18	4.06 \pm 0.28	4.00 \pm 0.19	4.46 \pm 0.22	101° at 1.2 miles

(1) Direction and distance based on NMP-2 reactor centerline.

* TLD required by ODCM

TABLE 6-10 (Continued)
DIRECT RADIATION MEASUREMENT RESULTS
Results in Units of mrem/std. Month \pm 1 Sigma

Location Number	Location	First Quarter	Second Quarter	Third Quarter	Fourth Quarter	Direction & Distance (1)
99	NMP Rd 04 Mi N of Lake Rd Env Station R1	3.56 \pm 0.13	4.30 \pm 0.22	4.24 \pm 0.29	4.59 \pm 0.22	88° at 1.8 miles
100	Rt 29 & Lake Rd Env Station R2	3.51 \pm 0.16	4.10 \pm 0.35	4.19 \pm 0.19	4.46 \pm 0.21	104° at 1.1 miles
101	Rt 29 07 Mi S of Lake Rd Env Station R3	3.31 \pm 0.15	3.90 \pm 0.37	3.68 \pm 0.17	3.81 \pm 0.18	132° at 1.5 miles
102	EOF/ENV Lab Rt 176 E Driveway Lamp Post	3.43 \pm 0.14	4.03 \pm 0.20	3.90 \pm 0.13	4.08 \pm 0.17	175° at 11.9 miles
103	EIC East Garage Rd Lamp Post	3.98 \pm 0.16	4.50 \pm 0.28	4.46 \pm 0.19	4.72 \pm 0.21	267° at 0.4 miles
104	Parkhurst Rd Pole #23 01 Mi S of Lake Rd	3.46 \pm 0.14	4.21 \pm 0.27	3.96 \pm 0.19	4.18 \pm 0.21	102° at 1.4 miles
105	Lake View Rd Pole #36 05 Mi S of Lake Rd	3.53 \pm 0.15	4.35 \pm 0.25	4.17 \pm 0.49	4.34 \pm 0.23	198° at 1.4 miles
106	Shoreline Cove W of NMP-1 Tree On W Edge	4.59 \pm 0.21	5.56 \pm 0.35	5.17 \pm 0.23	5.48 \pm 0.20	274° at 0.3 miles
107	Shoreline Cove W of NMP-1 30 Ft SSW of #106	4.45 \pm 0.19	5.30 \pm 0.28	4.98 \pm 0.25	5.30 \pm 0.23	272° at 0.3 miles
108	Lake Rd Pole #142 300 Ft E of Rt 29 S	3.61 \pm 0.10	4.46 \pm 0.22	4.13 \pm 0.22	4.29 \pm 0.21	104° at 1.1 miles
109	Tree North of Lake Rd 300 Ft E of Rt 29 N	3.60 \pm 0.14	4.45 \pm 0.39	4.09 \pm 0.26	4.34 \pm 0.20	103° at 1.1 miles
111	State Route 38 Sterling NY - Control	3.42 \pm 0.21	4.10 \pm 0.28	3.73 \pm 0.18	4.07 \pm 0.23	166° at 26.4 miles
112	EOF/ENV Lab Oswego County Airport	3.71 \pm 0.10	4.14 \pm 0.25	3.90 \pm 0.25	4.30 \pm 0.17	175° at 11.9 miles
113	Baldwinsville NY - Control	3.70 \pm 0.38	3.95 \pm 0.48	3.72 \pm 0.19	4.09 \pm 0.26	214° at 21.8 miles

(1) Direction and distance based on NMP-2 reactor centerline.

* TLD required by ODCM

TABLE 6-11
CONCENTRATIONS OF IODINE-131 AND GAMMA EMITTERS IN MILK
Results in Units of pCi/liter \pm 1 Sigma
Sample Location ** No. 55 ***

Date	I-131	Cs-134	Cs-137	K-40	Ba/La-140	Others †
04/07/08	< 0.524	< 8.32	< 7.67	1425 +/- 90.7	< 5.10	<LLD
04/21/08	< 0.734	< 8.32	< 7.10	1752 +/- 88.4	< 7.30	<LLD
05/05/08	< 0.516	< 7.56	< 6.55	1500 +/- 82.8	< 7.28	<LLD
05/19/08	< 0.503	< 4.76	< 7.08	1526 +/- 82.9	< 8.97	<LLD
06/09/08	< 0.480	< 5.01	< 7.64	1533 +/- 79.4	< 9.00	<LLD
06/23/08	< 0.746	< 5.30	< 5.32	1539 +/- 82.4	< 8.18	<LLD
07/07/08	< 0.481	< 8.02	< 6.55	1568 +/- 84.2	< 8.61	<LLD
07/21/08	< 0.449	< 7.23	< 5.32	1594 +/- 85.2	< 6.76	<LLD
08/04/08	< 0.442	< 8.02	< 4.56	1570 +/- 84.3	< 6.78	<LLD
08/18/08	< 0.565	< 7.06	< 6.54	1405 +/- 91.3	< 8.35	<LLD
09/08/08	< 0.500	< 7.21	< 8.90	1885 +/- 107.7	< 10.34	<LLD
09/22/08	< 0.541	< 8.88	< 6.69	1605 +/- 84.4	< 6.77	<LLD
10/06/08	< 0.540	< 8.09	< 7.40	1408 +/- 90.1	< 11.69	<LLD
10/20/08	< 0.496	< 12.52	< 15.17	2530 +/- 156.8	< 13.41	<LLD
11/03/08	< 0.569	< 10.36	< 8.45	1686 +/- 100.7	< 11.02	<LLD
11/17/08	< 0.486	< 6.14	< 9.66	1489 +/- 95.4	< 8.26	<LLD
12/01/08	< 0.479	< 9.55	< 9.29	1652 +/- 102.6	< 13.50	<LLD
12/15/08	< 0.430	< 9.39	< 9.84	1629 +/- 99.0	< 12.28	<LLD

** Sample location is Optional

*** Corresponds to sample location noted on Figure 3.3-4

† Plant related radionuclides

TABLE 6-11 (Continued)
CONCENTRATIONS OF IODINE-131 AND GAMMA EMITTERS IN MILK
Results in Units of pCi/liter \pm 1 Sigma
Sample Location ** No. 76 ***

Date	I-131	Cs-134	Cs-137	K-40	Ba/La-140	Others †
04/07/08	< 0.537	< 6.70	< 7.44	1468 +/- 81.6	< 6.21	<LLD
04/21/08	< 0.967	< 4.15	< 6.37	1642 +/- 78.4	< 4.02	<LLD
05/05/08	< 0.599	< 6.35	< 8.71	1490 +/- 96.7	< 8.25	<LLD
05/19/08	< 0.661	< 5.47	< 6.96	1668 +/- 78.4	< 6.88	<LLD
06/09/08	< 0.451	< 4.29	< 5.59	1719 +/- 65.1	< 5.26	<LLD
06/23/08	< 0.433	< 5.41	< 6.24	1835 +/- 82.0	< 6.12	<LLD
07/07/08	< 0.535	< 11.34	< 8.50	1625 +/- 101.2	< 11.60	<LLD
07/21/08	< 0.526	< 5.01	< 8.91	1379 +/- 93.5	< 5.55	<LLD
08/04/08	< 0.434	< 5.34	< 7.10	1782 +/- 81.8	< 6.91	<LLD
08/18/08	< 0.599	< 4.76	< 7.68	1413 +/- 78.5	< 8.97	<LLD
09/08/08	< 0.553	< 6.14	< 6.31	1567 +/- 76.2	< 6.91	<LLD
09/22/08	< 0.678	< 8.91	< 9.48	1249 +/- 91.0	< 11.60	<LLD
10/06/08	< 0.533	< 8.02	< 6.69	1300 +/- 76.4	< 4.80	<LLD
10/20/08	< 0.665	< 9.59	< 5.52	1420 +/- 89.0	< 8.38	<LLD
11/03/08	< 0.613	< 4.51	< 7.72	1662 +/- 78.2	< 8.19	<LLD
11/17/08	< 0.568	< 5.47	< 9.33	1803 +/- 105.6	< 8.80	<LLD
12/01/08	< 0.541	< 7.21	< 9.74	1888 +/- 107.7	< 12.24	<LLD
12/15/08	< 0.499	< 9.00	< 8.21	1890 +/- 105.8	< 10.35	<LLD

** Sample location is Optional

*** Corresponds to sample location noted on Figure 3.3-4

† Plant related radionuclides

TABLE 6-11(Continued)
CONCENTRATIONS OF IODINE-131 AND GAMMA EMITTERS IN MILK
Results in Units of pCi/liter \pm 1 Sigma
Sample Location * No. 77 (Control) ***

Date	I-131	Cs-134	Cs-137	K-40	Ba/La-140	Others †
04/07/08	< 0.594	< 5.85	< 4.37	1450 +/- 68.1	< 4.97	<LLD
04/21/08	< 0.923	< 3.62	< 5.44	1371 +/- 67.8	< 5.69	<LLD
05/05/08	< 0.474	< 8.76	< 9.27	1546 +/- 95.0	< 10.49	<LLD
05/19/08	< 0.572	< 4.33	< 5.74	1460 +/- 67.7	< 4.52	<LLD
06/09/08	< 0.514	< 9.67	< 10.27	2280 +/- 118.7	< 10.81	<LLD
06/23/08	< 0.680	< 4.17	< 5.24	1397 +/- 66.9	< 6.30	<LLD
07/07/08	< 0.434	< 8.54	< 8.16	1487 +/- 94.1	< 9.15	<LLD
07/21/08	< 0.435	< 7.84	< 6.54	1303 +/- 85.8	< 6.43	<LLD
08/04/08	< 0.687	< 4.12	< 6.20	1473 +/- 68.2	< 5.34	<LLD
08/18/08	< 0.574	< 3.53	< 4.90	1535 +/- 65.7	< 5.63	<LLD
09/08/08	< 0.482	< 7.86	< 9.84	1519 +/- 95.7	< 8.27	<LLD
09/22/08	< 0.531	< 9.22	< 6.55	1632 +/- 97.4	< 12.98	<LLD
10/06/08	< 0.754	< 11.25	< 14.41	2474 +/- 153.1	< 13.47	<LLD
10/20/08	< 0.499	< 6.53	< 5.24	1507 +/- 68.4	< 4.71	<LLD
11/03/08	< 0.729	< 9.08	< 7.62	1541 +/- 100.4	< 12.28	<LLD
11/17/08	< 0.457	< 6.31	< 5.45	1375 +/- 65.7	< 3.88	<LLD
12/01/08	< 0.534	< 8.88	< 5.82	1531 +/- 83.5	< 6.77	<LLD
12/15/08	< 0.439	< 7.87	< 6.41	1497 +/- 82.6	< 6.77	<LLD

** Sample location is Optional

*** Corresponds to sample location noted on Figure 3.3-4

† Plant related radionuclides

TABLE 6-12
CONCENTRATIONS OF GAMMA EMITTERS IN FOOD PRODUCTS

Results in Units of pCi/kg (wet) \pm 1 sigma

Location ***	Date	Description	Be-7	K-40	I-131	Cs-134	Cs-137	Zn-65	Others †
Culeton 133 *	09/15/08	Tomatoes	< 131	3666 +/- 244	< 20.7	< 25.0	< 18.3	< 54.7	< LLD
	09/15/08	Rhubarb Leaves	109 +/- 52	2976 +/- 231	< 19.4	< 27.3	< 18.2	< 60.7	< LLD
	09/15/08	Pepper Leaves	848 +/- 86	6142 +/- 291	< 21.8	< 21.7	< 16.3	< 55.0	< LLD
	09/15/08	Bean Leaves	1369 +/- 99	2533 +/- 191	< 18.3	< 21.3	< 17.8	< 60.1	< LLD
Kronenbitter 48 *	09/15/08	Grape Leaves	1507 +/- 130	3407 +/- 284	< 32.7	< 40.8	< 32.8	< 44.1	< LLD
	09/15/08	Bean Leaves	1159 +/- 86	2595 +/- 190	< 16.3	< 22.3	< 16.6	< 39.8	< LLD
	09/15/08	Tomatoes	< 207	3383 +/- 263	< 24.4	< 23.9	< 29.8	< 84.1	< LLD
O'Connor 484**	09/10/08	Tomatoes	< 99	2122 +/- 141	< 12.1	< 16.9	< 12.1	< 31.5	< LLD
	09/10/08	Horseradish Leaves	519 +/- 77	2686 +/- 207	< 23.7	< 30.8	< 22.9	< 65.8	< LLD
	09/10/08	Rhubarb Leaves	141 +/- 51	3597 +/- 206	< 18.9	< 16.0	< 17.4	< 33.0	< LLD
	09/10/08	Squash Leaves	1599 +/- 101	3070 +/- 197	< 19.0	< 15.5	< 20.6	< 64.9	< LLD
	09/10/08	Zucchini Leaves	816 +/- 84	2264 +/- 171	< 21.1	< 11.3	< 17.4	< 47.7	< LLD
Hall 142 **	09/10/08	Squash Leaves	1326 +/- 83	2417 +/- 157	< 18.2	< 13.5	< 15.2	< 23.2	< LLD
	09/10/08	Tomatoes	< 102	2566 +/- 130	< 11.7	< 12.2	< 9.1	< 33.0	< LLD
	09/10/08	Grape Leaves	3308 +/- 173	2515 +/- 223	< 29.8	< 34.4	< 26.5	< 39.8	< LLD
Whaley 144 **	09/10/08	Tomatoes	< 137	3375 +/- 215	< 18.0	< 22.8	< 17.7	< 51.9	< LLD
	09/10/08	Horseradish Leaves	303 +/- 84	3588 +/- 255	< 25.8	< 30.4	< 28.3	< 63.8	< LLD
	09/10/08	Squash Leaves	2472 +/- 129	1826 +/- 173	< 19.2	< 13.7	< 17.0	< 45.6	< LLD
	09/10/08	Corn Leaves	1791 +/- 120	5001 +/- 265	< 23.1	< 28.9	< 21.4	< 32.2	< LLD
	09/10/08	Pepper Leaves	1120 +/- 140	8609 +/- 436	< 33.7	< 24.6	< 33.4	< 99.0	< LLD
	09/10/08	Zucchini Leaves	1805 +/- 109	3142 +/- 193	< 19.2	< 22.9	< 16.8	< 43.6	< LLD
Flack C2 (Control) *	09/16/08	Zucchini Leaves	575 +/- 72	3008 +/- 193	< 17.4	< 14.7	< 14.9	< 46.5	< LLD
	09/16/08	Horseradish Leaves	286 +/- 65	3074 +/- 242	< 18.4	< 16.0	< 23.7	< 67.9	< LLD
	09/16/08	Rhubarb Leaves	< 190	2928 +/- 209	< 16.9	< 23.4	< 15.6	< 27.9	< LLD
	09/16/08	Corn Leaves	1349 +/- 132	4728 +/- 349	< 31.1	< 23.5	< 28.4	< 82.8	< LLD
	09/16/08	Tomatoes	< 149	4096 +/- 294	< 17.2	< 26.0	< 26.9	< 66.2	< LLD
	09/16/08	Bean Leaves	945 +/- 110	3084 +/- 249	< 21.5	< 16.5	< 26.8	< 66.5	< LLD

* Sample location required by the ODCM

** Sample location is Optional

*** Corresponds to sample location noted on Figure 3.3-5

† Plant related radionuclides

**TABLE 6-13
MILK ANIMAL CENSUS 2008**

Town or Area^(a)	Location Designation⁽¹⁾	Degrees⁽²⁾	Distance⁽²⁾ (Miles)	Number of Milk Animals
New Haven	9	97°	4.8	40C 1G
	64	107°	7.9	40C
	78	128°	8.0	6C
Mexico	14	123°	9.4	56C
	60	91°	9.5	20C
	76*	120°	6.3	30C
	55*	95°	9.0	55C
	21	112°	10.3	70C
	72	100°	9.6	36C
Granby (Control)	50	93°	8.8	1C
	77**	191°	13.9	62C
MILKING ANIMAL TOTALS: <u>416</u> Cows (including control locations) <u>1</u> Goats				
MILKING ANIMAL TOTALS: <u>354</u> Cows (excluding control locations) <u>1</u> Goats				
NOTES: C Cows G Goats * Milk sample location ** Milk sample control location (1) Reference Figure 3.3-4 (2) Degrees and distance are based on NMP-2 Reactor Building centerline (a) Census performed out to a distance of approximately 10 miles				

**TABLE 6-14
2008 RESIDENCE CENSUS**

Meteorological Sector	Location	Map Location⁽¹⁾	Degrees⁽²⁾	Distance⁽²⁾
N	*	-	-	-
NNE	*	-	-	-
NE	*	-	-	-
ENE	*	-	-	-
E	West Sunset Bay / Lake Road	A	100°	1.3 miles
ESE	Lake Road	B	104°	1.1 miles
SE	County Route 29	C	125°	1.4 miles
SSE	County Route 29 / Miner Road	D	158°	1.7 miles
S	Miner Road	E	171°	1.6 miles
SSW	Lakeview Road	F	208°	1.2 miles
SW	Lakeview Road	G	217°	1.1 miles
WSW	Bayshore Drive	H	237°	1.4 miles
W	*	-	-	-
WNW	*	-	-	-
NW	*	-	-	-
NNW	*	-	-	-

NOTES:
 * This meteorological sector is over Lake Ontario. There is no residence within five miles
 (1) Corresponds to Figure 3.3-5
 (2) Degrees and distance are based on NMP-2 Reactor Building centerline

7.0 HISTORICAL DATA TABLES

Sample Statistics from Previous Environmental Sampling

The mean, minimum value and maximum value were calculated for selected sample mediums and isotopes.

Special Considerations:

1. Sample data listed as 1969 was taken from the NINE MILE POINT, PREOPERATION SURVEY, 1969 and ENVIRONMENTAL MONITORING REPORT FOR NIAGARA MOHAWK POWER CORPORATION NINE MILE POINT NUCLEAR STATION, NOVEMBER, 1970.
2. Sample results listed as 1974 and 1975 were taken from the respective Annual Radiological Environmental Operating Reports for Nine Mile Point Unit 1 Nuclear Station. Sample results listed as 1986 through the current year were taken from the respective James A. FitzPatrick Nuclear Power Plant Annual Radiological Environmental Operating Reports.
3. Only measured values were used for statistical calculations.
4. The term MDL was used prior to 1979 to represent the concept of Lower Limit of Detection (LLD). MDL = Minimum Detectable Level.

TABLE 7-1
HISTORICAL ENVIRONMENTAL SAMPLE DATA
SHORELINE SEDIMENT
Results in pCi/g (dry)

LOCATION: CONTROL *									
Isotope	Cs-134			Cs-137			Co-60		
Year	Min.	Max.	Mean	Min.	Max.	Mean	Min.	Max.	Mean
1969†	**	**	**	**	**	**	**	**	**
1974†	**	**	**	**	**	**	**	**	**
1975†	**	**	**	**	**	**	**	**	**
1986	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1987	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1988	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1989	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1990	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1991	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1992	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1993	<LLD	<LLD	<LLD	0.027	0.027	0.027	<LLD	<LLD	<LLD
1994	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1995	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1996	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1997	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1998	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1999	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2000	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2001	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2002	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2003	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2004	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2005	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2006	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2007	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2008	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD

* Langs Beach – beyond influence of the site in a westerly direction.
 ** No data. Sample not required until new technical specifications implemented in 1985.
 † 1969 data is considered to be pre-operational for the site. 1974 and 1975 data is considered to be pre-operational for the JAFNPP.

TABLE 7-2
HISTORICAL ENVIRONMENTAL SAMPLE DATA
SHORELINE SEDIMENT
Results in pCi/g (dry)

LOCATION: INDICATOR *									
Isotope	Cs-134			Cs-137			Co-60		
Year	Min.	Max.	Mean	Min.	Max.	Mean	Min.	Max.	Mean
1969†	**	**	**	**	**	**	**	**	**
1974†	**	**	**	**	**	**	**	**	**
1975†	**	**	**	**	**	**	**	**	**
1986	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1987	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1988	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1989	<LLD	<LLD	<LLD	0.25	0.32	0.29	<LLD	<LLD	<LLD
1990	<LLD	<LLD	<LLD	0.28	0.30	0.29	<LLD	<LLD	<LLD
1991	<LLD	<LLD	<LLD	0.12	0.14	0.13	<LLD	<LLD	<LLD
1992	<LLD	<LLD	<LLD	0.12	0.14	0.13	<LLD	<LLD	<LLD
1993	<LLD	<LLD	<LLD	0.18	0.46	0.32	<LLD	<LLD	<LLD
1994	<LLD	<LLD	<LLD	0.06	0.37	0.22	<LLD	<LLD	<LLD
1995	<LLD	<LLD	<LLD	0.14	0.15	0.15	<LLD	<LLD	<LLD
1996	<LLD	<LLD	<LLD	0.15	0.17	0.16	<LLD	<LLD	<LLD
1997	<LLD	<LLD	<LLD	0.11	0.17	0.14	<LLD	<LLD	<LLD
1998	<LLD	<LLD	<LLD	0.06	0.06	0.06	<LLD	<LLD	<LLD
1999	<LLD	<LLD	<LLD	0.06	0.10	0.08	<LLD	<LLD	<LLD
2000	<LLD	<LLD	<LLD	0.06	0.07	0.06	<LLD	<LLD	<LLD
2001	<LLD	<LLD	<LLD	0.06	0.07	0.07	<LLD	<LLD	<LLD
2002	<LLD	<LLD	<LLD	0.05	0.05	0.05	<LLD	<LLD	<LLD
2003	<LLD	<LLD	<LLD	0.04	0.05	0.05	<LLD	<LLD	<LLD
2004	<LLD	<LLD	<LLD	0.04	0.04	0.04	<LLD	<LLD	<LLD
2005	<LLD	<LLD	<LLD	0.06	0.09	0.08	<LLD	<LLD	<LLD
2006	<LLD	<LLD	<LLD	0.06	0.06	0.06	<LLD	<LLD	<LLD
2007	<LLD	<LLD	<LLD	0.04	0.04	0.04	<LLD	<LLD	<LLD
2008	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD

* Sunset Beach - closest off-site location with recreational value.
 ** No data. Sample not required until new technical specifications implemented in 1985.
 † 1969 data is considered to be pre-operational for the site. 1974 and 1975 data is considered to be pre-operational for the JAFNPP.

TABLE 7-3
HISTORICAL ENVIRONMENTAL SAMPLE DATA
FISH
Results in pCi/g (wet)

LOCATION: CONTROL *			
Isotope	Cs-137		
Year	Min.	Max.	Mean
1969†	No Data	No Data	No Data
1974†	0.94	0.94	0.94
1975†	<MDL	<MDL	<MDL
1986	0.021	0.032	0.025
1987	0.017	0.040	0.031
1988	0.023	0.053	0.034
1989	0.028	0.043	0.034
1990	0.033	0.079	0.045
1991	0.021	0.034	0.029
1992	0.019	0.026	0.022
1993	0.030	0.036	0.033
1994	0.014	0.031	0.022
1995	0.017	0.023	0.019
1996	0.018	0.022	0.020
1997	0.012	0.030	0.021
1998	0.013	0.013	0.013
1999	<LLD	<LLD	<LLD
2000	0.021	0.021	0.021
2001	<LLD	<LLD	<LLD
2002	<LLD	<LLD	<LLD
2003	<LLD	<LLD	<LLD
2004	<LLD	<LLD	<LLD
2005	<LLD	<LLD	<LLD
2006	<LLD	<LLD	<LLD
2007	<LLD	<LLD	<LLD
2008	<LLD	<LLD	<LLD

* Control location was at an area beyond the influence of the site (westerly direction).

† 1969 data is considered to be pre-operational for the site. 1974 and 1975 data is considered to be pre-operational for the JAFNPP.

TABLE 7-4
HISTORICAL ENVIRONMENTAL SAMPLE DATA
FISH
Results in pCi/g (wet)

LOCATION: INDICATOR * (NMP/JAF)			
Isotope	Cs-137		
Year	Min.	Max.	Mean
1969†	0.01	0.13	0.06
1974†	0.08	4.40	0.57
1975†	1.10	1.70	1.38
1986	0.009	0.051	0.028
1987	0.024	0.063	0.033
1988	0.022	0.054	0.032
1989	0.020	0.044	0.034
1990	0.027	0.093	0.040
1991	0.018	0.045	0.029
1992	0.014	0.030	0.024
1993	0.018	0.035	0.028
1994	0.015	0.023	0.019
1995	0.016	0.022	0.019
1996	0.016	0.025	0.020
1997	0.014	0.023	0.018
1998	0.021	0.021	0.021
1999	0.018	0.021	0.020
2000	<LLD	<LLD	<LLD
2001	<LLD	<LLD	<LLD
2002	0.016	0.016	0.016
2003	<LLD	<LLD	<LLD
2004	<LLD	<LLD	<LLD
2005	<LLD	<LLD	<LLD
2006	<LLD	<LLD	<LLD
2007	<LLD	<LLD	<LLD
2008	<LLD	<LLD	<LLD

* Indicator locations are in the general area of the NMP-1 and J.A. FitzPatrick cooling water discharge structures.

† 1969 data is considered to be pre-operational for the site. 1974 and 1975 data is considered to be pre-operational for the JAFNPP.

TABLE 7-5
HISTORICAL ENVIRONMENTAL SAMPLE DATA
SURFACE WATER
Results in pCi/liter

LOCATION: CONTROL †						
Isotope	Cs-137			Co-60		
Year	Min.	Max.	Mean	Min.	Max.	Mean
1969††	*	*	*	*	*	*
1974††	*	*	*	*	*	*
1975††	*	*	*	*	*	*
1986	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1987	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1988	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1989	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1990	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1991	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1992	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1993	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1994	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1995	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1996	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1997	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1998	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1999	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2000	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2001	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2002	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2003	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2004	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2005	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2006	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2007	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2008	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD

* No gamma analysis performed (not required).

† Location was the City of Oswego Water Supply for 1969 - 1984 and the Oswego Steam Station inlet canal for 1985 - Present.

†† 1969 data is considered to be pre-operational for the site. 1974 and 1975 data is considered to be pre-operational for the JAFNPP.

TABLE 7-6
HISTORICAL ENVIRONMENTAL SAMPLE DATA
SURFACE WATER
Results in pCi/liter

LOCATION: INDICATOR †						
Isotope	Cs-137			Co-60		
Year	Min.	Max.	Mean	Min.	Max.	Mean
1969††	*	*	*	*	*	*
1974††	*	*	*	*	*	*
1975††	*	*	*	*	*	*
1986	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1987	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1988	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1989	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1990	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1991	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1992	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1993	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1994	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1995	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1996	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1997	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1998	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1999	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2000	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2001	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2002	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2003	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2004	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2005	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2006	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2007	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2008	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD

* No gamma analysis performed (not required).

† Indicator location was the NMP 1 Inlet Canal for the period 1969 - 1973, and the JAF Inlet Canal for 1974 - Present.

†† 1969 data is considered to be pre-operational for the site. 1974 and 1975 data is considered to be pre-operational for the JAFNPP.

TABLE 7-7
HISTORICAL ENVIRONMENTAL SAMPLE DATA
SURFACE WATER TRITIUM
Results in pCi/liter

LOCATION: CONTROL *			
Isotope	Tritium		
Year	Min.	Max.	Mean
1969†	No Data	No Data	No Data
1974†	<MDL	<MDL	<MDL
1975†	311	414	362
1986	250	550	373
1987	140	270	210
1988	240	460	320
1989	143	217	186
1990	260	320	290
1991	180	200	190
1992	190	310	243
1993	160	230	188
1994	250	250	250
1995	230	230	230
1996	<LLD	<LLD	<LLD
1997	<LLD	<LLD	<LLD
1998	190	190	190
1999	220	510	365
2000	196	237	212
2001	<LLD	<LLD	<LLD
2002	<LLD	<LLD	<LLD
2003	<LLD	<LLD	<LLD
2004	<LLD	<LLD	<LLD
2005	<LLD	<LLD	<LLD
2006	<LLD	<LLD	<LLD
2007	<LLD	<LLD	<LLD
2008	<LLD	<LLD	<LLD

* Control location is the City of Oswego, drinking water for 1969 - 1984 and the Oswego Steam Station inlet canal for 1985 - Present.

† 1969 data is considered to be pre-operational for the site. 1974 and 1975 data is considered to be pre-operational for the JAFNPP.

TABLE 7-8
HISTORICAL ENVIRONMENTAL SAMPLE DATA
SURFACE WATER TRITIUM
Results in pCi/liter

LOCATION: INDICATOR *			
Isotope	Tritium		
Year	Min.	Max.	Mean
1969†	No Data	No Data	No Data
1974†	380	500	440
1975†	124	482	335
1986	260	500	380
1987	160	410	322
1988	430	480	460
1989	135	288	225
1990	220	290	250
1991	250	390	310
1992	240	300	273
1993	200	280	242
1994	180	260	220
1995	320	320	320
1996	<LLD	<LLD	<LLD
1997	160	160	160
1998	190	190	190
1999	180	270	233
2000	161	198	185
2001	<LLD	<LLD	<LLD
2002	297	297	297
2003	<LLD	<LLD	<LLD
2004	<LLD	<LLD	<LLD
2005	<LLD	<LLD	<LLD
2006	<LLD	<LLD	<LLD
2007	<LLD	<LLD	<LLD
2008	<LLD	<LLD	<LLD

* Indicator location was the NMP-1 Inlet Canal during the period 1969-1973, and the JAF Inlet Canal for 1974-Present.

† 1969 data is considered to be pre-operational for the site. 1974 and 1975 data is considered to be pre-operational for the JAFNPP.

TABLE 7-9
HISTORICAL ENVIRONMENTAL SAMPLE DATA
AIR PARTICULATE GROSS BETA
Results in pCi/m³

LOCATION: CONTROL *			
Isotope	Gross Beta		
Year	Min.	Max.	Mean
1969†	0.130	0.540	0.334
1974†	0.001	0.808	0.121
1975†	0.008	0.294	0.085
1986	0.008	0.272	0.039
1987	0.009	0.037	0.021
1988	0.008	0.039	0.018
1989	0.007	0.039	0.017
1990	0.003	0.027	0.013
1991	0.007	0.028	0.014
1992	0.006	0.020	0.012
1993	0.007	0.022	0.013
1994	0.008	0.025	0.015
1995	0.006	0.023	0.014
1996	0.008	0.023	0.014
1997	0.006	0.025	0.013
1998	0.004	0.034	0.014
1999	0.010	0.032	0.017
2000	0.006	0.027	0.015
2001	0.006	0.034	0.016
2002	0.008	0.027	0.016
2003	0.004	0.032	0.015
2004	0.008	0.032	0.016
2005	0.008	0.034	0.019
2006	0.007	0.033	0.016
2007	0.008	0.028	0.016
2008	0.007	0.031	0.015

* Locations used for 1977 - 1984 were C off-site, D1 off-site, D2 off-site, E off-site, F off-site, and G off-site. Control location R-5 off-site was used for 1985-Present (formerly C off-site location).

† 1969 data is considered to be pre-operational for the site. 1974 and 1975 data is considered to be pre-operational for the JAFNPP.

TABLE 7-10
HISTORICAL ENVIRONMENTAL SAMPLE DATA
AIR PARTICULATE GROSS BETA
Results in pCi/m³

LOCATION: INDICATOR *			
Isotope	Gross Beta		
Year	Min.	Max.	Mean
1969†	0.130	0.520	0.320
1974†	0.003	0.885	0.058
1975†	0.001	0.456	0.067
1986	0.007	0.289	0.039
1987	0.009	0.040	0.021
1988	0.007	0.040	0.018
1989	0.007	0.041	0.017
1990	0.006	0.023	0.014
1991	0.006	0.033	0.015
1992	0.005	0.024	0.013
1993	0.005	0.023	0.014
1994	0.006	0.024	0.015
1995	0.004	0.031	0.014
1996	0.006	0.025	0.013
1997	0.001	0.018	0.010
1998	0.002	0.040	0.015
1999	0.009	0.039	0.017
2000	0.005	0.033	0.015
2001	0.004	0.037	0.016
2002	0.006	0.026	0.016
2003	0.005	0.035	0.015
2004	0.003	0.036	0.016
2005	0.007	0.041	0.019
2006	0.005	0.035	0.015
2007	0.007	0.028	0.016
2008	0.004	0.030	0.016

* Locations used for 1969 - 1973 were D1 on-site, D2 on-site, E on-site, F on-site and G on-site. Locations used for 1974 - 1984 were D1 on-site, D2 on-site, E on-site, F on-site, G on-site, H on-site, I on-site, J on-site and K on-site, as applicable. 1985 - Present: locations were R-1 off-site, R-2 off-site, R-3 off-site, and R-4 off-site.

† 1969 data is considered to be pre-operational for the site. 1974 and 1975 data is considered to be pre-operational for the JAFNPP.

TABLE 7-11
HISTORICAL ENVIRONMENTAL SAMPLE DATA
AIR PARTICULATES
Results in pCi/m³

LOCATION: CONTROL **						
Isotope	Cs-137			Co-60		
Year	Min.	Max.	Mean	Min.	Max.	Mean
1969†	*	*	*	*	*	*
1974†	*	*	*	*	*	*
1975†	*	*	*	*	*	*
1986	0.0075	0.0311	0.0193	<LLD	<LLD	<LLD
1987	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1988	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1989	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1990	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1991	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1992	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1993	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1994	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1995	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1996	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1997	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1998	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1999	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2000	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2001	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2002	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2003	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2004	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2005	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2006	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2007	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2008	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD

* No data available (not required prior to 1977).

** Locations included composites of off-site air monitoring locations for 1977 - 1984. Sample location included only R-5 air monitoring location for 1985 - Present.

† 1969 data is considered to be pre-operational for the site. 1974 and 1975 data is considered to be pre-operational for the JAFNPP.

TABLE 7-12
HISTORICAL ENVIRONMENTAL SAMPLE DATA
AIR PARTICULATES
Results in pCi/m³

LOCATION: INDICATOR **						
Isotope	Cs-137			Co-60		
Year	Min.	Max.	Mean	Min.	Max.	Mean
1969†	*	*	*	*	*	*
1974†	*	*	*	*	*	*
1975†	*	*	*	*	*	*
1986	0.0069	0.0364	0.0183	<LLD	<LLD	<LLD
1987	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1988	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1989	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1990	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1991	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1992	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1993	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1994	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1995	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1996	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1997	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1998	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1999	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2000	<LLD	<LLD	<LLD	0.0048	0.0048	0.0048
2001	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2002	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2003	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2004	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2005	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2006	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2007	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2008	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD

* No data available (not required prior to 1977).

** Locations included composites of on-site air monitoring locations for 1977 - 1984. Sample locations included R-1 through R-4 air monitoring locations for 1985 - Present.

† 1969 data is considered to be pre-operational for the site. 1974 and 1975 data is considered to be pre-operational for the JAFNPP.

TABLE 7-13
HISTORICAL ENVIRONMENTAL SAMPLE DATA
AIR RADIOIODINE
Results in pCi/m³

LOCATION: CONTROL *			
Isotope	Iodine-131		
Year	Min.	Max.	Mean
1969†	**	**	**
1974†	**	**	**
1975†	<MDL	<MDL	<MDL
1986	0.041	0.332	0.151
1987	<LLD	<LLD	<LLD
1988	<LLD	<LLD	<LLD
1989	<LLD	<LLD	<LLD
1990	<LLD	<LLD	<LLD
1991	<LLD	<LLD	<LLD
1992	<LLD	<LLD	<LLD
1993	<LLD	<LLD	<LLD
1994	<LLD	<LLD	<LLD
1995	<LLD	<LLD	<LLD
1996	<LLD	<LLD	<LLD
1997	<LLD	<LLD	<LLD
1998	<LLD	<LLD	<LLD
1999	<LLD	<LLD	<LLD
2000	<LLD	<LLD	<LLD
2001	<LLD	<LLD	<LLD
2002	<LLD	<LLD	<LLD
2003	<LLD	<LLD	<LLD
2004	<LLD	<LLD	<LLD
2005	<LLD	<LLD	<LLD
2006	<LLD	<LLD	<LLD
2007	<LLD	<LLD	<LLD
2008	<LLD	<LLD	<LLD

* Locations D1 off-site, D2 off-site, E off-site, F off-site and G off-site used for 1976 - 1984. Location R-5 off-site used for 1985 - Present.

** No results - I-131 analysis not required.

† 1969 data is considered to be pre-operational for the site. 1974 and 1975 data is considered to be pre-operational for the JAFNPP.

TABLE 7-14
HISTORICAL ENVIRONMENTAL SAMPLE DATA
AIR RADIOIODINE
Results in pCi/m³

LOCATION: INDICATOR *			
Isotope	Iodine-131		
Year	Min.	Max.	Mean
1969†	**	**	**
1974†	**	**	**
1975†	0.25	0.30	0.28
1986	0.023	0.360	0.119
1987	0.011	0.018	0.014
1988	<LLD	<LLD	<LLD
1989	<LLD	<LLD	<LLD
1990	<LLD	<LLD	<LLD
1991	<LLD	<LLD	<LLD
1992	<LLD	<LLD	<LLD
1993	<LLD	<LLD	<LLD
1994	<LLD	<LLD	<LLD
1995	<LLD	<LLD	<LLD
1996	<LLD	<LLD	<LLD
1997	<LLD	<LLD	<LLD
1998	<LLD	<LLD	<LLD
1999	<LLD	<LLD	<LLD
2000	<LLD	<LLD	<LLD
2001	<LLD	<LLD	<LLD
2002	<LLD	<LLD	<LLD
2003	<LLD	<LLD	<LLD
2004	<LLD	<LLD	<LLD
2005	<LLD	<LLD	<LLD
2006	<LLD	<LLD	<LLD
2007	<LLD	<LLD	<LLD
2008	<LLD	<LLD	<LLD

- * Locations used for 1976 - 1984 were D1 on-site, D2 on-site, E on-site, F on-site, G on-site, H on-site, I on-site, J on-site and K on-site, as applicable. Locations used for 1985 – Present, were R-1 off-site, R-2 off-site, R-3 off-site, and R-4 off-site.
- ** No results - I-131 analysis not required.
- † 1969 data is considered to be pre-operational for the site. 1974 and 1975 data is considered to be pre-operational for the JAFNPP.

TABLE 7-15
HISTORICAL ENVIRONMENTAL SAMPLE DATA
ENVIRONMENTAL TLD
Results in mrem/standard month

LOCATION: CONTROL **			
Year	Min.	Max.	Mean
Preop†	(1)	(1)	(1)
1974†	2.7	8.9	5.6
1975†	4.8	6.0	5.5
1976	3.2	7.2	5.4
1977	4.0	8.0	5.3
1978	3.3	4.7	4.3
1979	3.3	5.7	4.7
1980	3.8	5.8	4.9
1981	3.5	5.9	4.8
1982	3.8	6.1	5.1
1983	4.9	7.2	5.8
1984	4.7	8.2	6.2
1986	5.3 (5.5)*	7.5 (7.2)*	6.3 (6.3)*
1987	4.6 (4.6)*	6.6 (5.8)*	5.4 (5.2)*
1988	4.4 (4.8)*	6.8 (6.8)*	5.6 (5.4)*
1989	2.9 (2.9)*	6.4 (5.6)*	4.7 (4.6)*
1990	3.7 (3.7)*	6.0 (5.9)*	4.8 (4.6)*
1991	3.8 (3.8)*	5.4 (5.3)*	4.5 (4.3)*
1992	2.6 (2.6)*	5.0 (4.7)*	4.1 (3.9)*
1993	3.4 (3.4)*	5.6 (5.2)*	4.4 (4.3)*
1994	3.1 (3.1)*	5.0 (4.6)*	4.1 (3.9)*
1995	3.4 (3.4)*	5.7 (4.9)*	4.4 (4.2)*
1996	3.4 (3.4)*	5.6 (5.6)*	4.3 (4.2)*
1997	3.7 (3.9)*	6.2 (5.2)*	4.7 (4.6)*
1998	3.7 (3.7)*	5.6 (4.8)*	4.4 (4.2)*
1999	3.6 (3.7)*	7.1 (4.7)*	4.6 (4.4)*
2000	3.7 (3.7)*	7.3 (5.5)*	4.7 (4.3)*
2001	3.6 (3.9)*	5.4 (5.0)*	4.4 (4.4)*
2002	3.4 (3.4)*	5.5 (5.2)*	4.3 (4.1)*
2003	3.4 (3.4)*	5.5 (4.8)*	4.2 (4.2)*
2004	3.3 (3.3)*	5.9 (5.9)*	4.3 (4.5)*
2005	3.3 (3.4)*	5.1 (4.5)*	4.1 (4.0)*
2006	3.3 (3.3)*	5.3 (5.3)*	4.1 (4.3)*
2007	3.2 (3.2)*	5.8 (5.8)*	4.4 (4.6)*
2008	3.3 (3.3)*	5.1 (5.1)*	4.1 (4.3)*

* Data in parentheses is RETS control data and is determined using TLDs #8, 14 and 49.

** TLD #8 and 14 established 1974, TLD #49 established 1980, TLD #111 established 1988, TLD #113 established 1991.

(1) Data not available.

† 1969 data is considered to be pre-operational for the site. 1974 and 1975 data is considered to be pre-operational for JAFNPP.

TABLE 7-16
HISTORICAL ENVIRONMENTAL SAMPLE DATA
ENVIRONMENTAL TLD
Results in mrem per standard month

LOCATION: SITE BOUNDARY **			
Year	Min.	Max.	Mean
Preopt†	*	*	*
1974†	*	*	*
1975†	*	*	*
1986	5.4	6.8	5.9
1987	4.7	5.9	5.3
1988	5.0	6.1	5.4
1989	4.5	5.2	4.8
1990	4.5	5.4	4.8
1991	4.3	5.5	4.8
1992	3.7	4.6	4.2
1993	3.8	4.8	4.3
1994	2.8	4.9	4.0
1995	3.5	5.1	4.4
1996	3.2	5.3	4.1
1997	3.5	5.9	4.6
1998	3.7	5.1	4.4
1999	3.3	7.5	4.7
2000	3.6	6.8	4.5
2001	3.6	5.3	4.5
2002	3.5	5.1	4.3
2003	3.2	4.9	4.3
2004	3.3	6.4	4.4
2005	3.4	4.8	4.2
2006	3.5	4.7	4.1
2007	3.2	5.4	4.3
2008	3.2	4.8	4.0

* Data not available (not required prior to 1985).
TLD #23, 75, 76, 77, 85, 86 and 87 are in close proximity to operational buildings along the north boundary. This boundary is the lakeshore and is considered to be generally not accessible to the public. These locations are not used in the site boundary dose determination.

† 1969 data is considered to be pre-operational for the site. 1974 and 1975 data is considered to be pre-operational for the JAFNPP.

** TLD's used for statistics: 7, 18, 78, 79, 80, 81, 82, 83 & 84.

TABLE 7-17
HISTORICAL ENVIRONMENTAL SAMPLE DATA
ENVIRONMENTAL TLD
Results in mrem per standard month

LOCATION: OFF-SITE SECTORS **			
Year	Min.	Max.	Mean
Preop†	*	*	*
1974†	*	*	*
1975†	*	*	*
1986	4.6	8.6	6.0
1987	4.3	6.0	5.2
1988	3.8	7.0	5.3
1989	2.5	6.8	4.9
1990	3.6	6.3	4.7
1991	3.6	5.8	4.7
1992	2.9	5.0	4.1
1993	3.4	6.3	4.5
1994	3.0	5.1	4.0
1995	3.2	5.2	4.3
1996	3.2	5.3	4.2
1997	3.5	5.8	4.4
1998	3.5	5.0	4.2
1999	3.6	5.6	4.4
2000	3.4	6.6	4.5
2001	3.6	5.4	4.4
2002	3.1	5.3	4.2
2003	3.4	4.8	4.1
2004	3.2	6.7	4.4
2005	3.2	4.7	4.0
2006	3.3	4.4	4.0
2007	3.1	5.1	4.2
2008	3.2	4.5	3.8

* Data not available (not required prior to 1985).
 ** Includes TLD numbers 88, 89, 90, 91, 92, 93, 94 and 95.
 † 1969 data is considered to be pre-operational for the site. 1974 and 1975 data is considered to be pre-operational for the JAFNPP.

TABLE 7-18
HISTORICAL ENVIRONMENTAL SAMPLE DATA
ENVIRONMENTAL TLD
Results in mrem per standard month

LOCATION: SPECIAL INTEREST **			
Year	Min.	Max.	Mean
Preop†	*	*	*
1974†	*	*	*
1975†	*	*	*
1986	4.8	8.2	6.1
1987	3.5	6.0	5.1
1988	3.9	6.6	5.3
1989	2.1	6.4	4.9
1990	3.2	6.3	4.8
1991	2.9	5.6	4.4
1992	3.0	4.8	4.1
1993	3.2	5.8	4.5
1994	2.9	4.8	4.1
1995	3.6	4.8	4.2
1996	3.2	5.1	4.2
1997	3.5	6.2	4.6
1998	3.7	5.6	4.4
1999	3.6	7.1	4.6
2000	3.6	7.3	4.7
2001	3.8	5.4	4.4
2002	3.5	5.5	4.2
2003	3.4	5.5	4.3
2004	3.0	5.9	4.2
2005	3.4	5.1	4.1
2006	3.5	5.3	4.1
2007	3.0	5.8	4.3
2008	3.1	5.1	4.0

* Data not available (not required prior to 1985).

** Include TLD numbers 8, 15, 56, 58, 96, 97 and 98.

† 1969 data is considered to be pre-operational for the site. 1974 and 1975 data is considered to be pre-operational for the JAFNPP.

TABLE 7-19
HISTORICAL ENVIRONMENTAL SAMPLE DATA
ENVIRONMENTAL TLD
Results in mrem per standard month

LOCATION: ON-SITE INDICATOR **			
Year	Min.	Max.	Mean
Preop†	*	*	*
1974†	3.1	10.6	5.7
1975†	4.6	16.0	7.3
1986	4.7	16.1	7.0
1987	4.0	11.4	5.8
1988	4.4	11.9	6.0
1989	2.7	13.1	6.0
1990	3.6	12.9	5.5
1991	3.2	11.6	5.4
1992	3.2	5.6	4.3
1993	3.1	13.6	5.2
1994	2.8	14.3	5.1
1995	3.5	28.6	6.2
1996	3.1	32.6	6.4
1997	3.5	28.8	8.1
1998	3.6	28.8	6.2
1999	3.3	28.4	6.6
2000	3.7	16.5	5.6
2001	3.8	14.5	5.6
2002	3.5	13.6	5.3
2003	3.2	12.9	5.3
2004	3.3	13.2	5.4
2005	3.4	14.1	5.4
2006	3.5	14.4	5.3
2007	3.2	14.8	5.6
2008	3.2	13.8	5.2

* No data available.

** Includes TLD numbers 3, 4, 5, 6 and 7 (1970 – 1973). Includes TLD numbers 3, 4, 5, 6, 7, 23, 24, 25 and 26 (1974 – Present).

† 1969 data is considered to be pre-operational for the site. 1974 and 1975 data is considered to be pre-operational for the JAFNPP.

TABLE 7-20
HISTORICAL ENVIRONMENTAL SAMPLE DATA
ENVIRONMENTAL TLD
Results in mrem per standard month

LOCATION: OFF-SITE INDICATOR **			
Year	Min.	Max.	Mean
Preop†	*	*	*
1974†	2.4	8.9	5.3
1975†	4.5	7.1	5.5
1986	5.0	7.6	6.1
1987	4.4	6.6	5.2
1988	4.2	6.6	5.4
1989	2.8	6.4	4.6
1990	3.8	6.1	4.8
1991	3.4	5.8	4.5
1992	3.1	5.2	4.1
1993	3.2	5.7	5.0
1994	3.0	5.1	4.1
1995	3.9	5.7	4.4
1996	3.3	5.5	4.1
1997	3.7	6.2	4.7
1998	3.9	5.6	4.5
1999	3.8	7.1	4.6
2000	3.8	7.3	4.6
2001	3.7	5.9	4.6
2002	3.6	5.5	4.4
2003	3.1	5.5	4.4
2004	3.2	6.5	4.5
2005	3.6	5.1	4.2
2006	3.9	5.3	4.2
2007	3.4	4.9	4.3
2008	3.3	4.5	4.0

* No data available.

** Includes TLD numbers 9, 10, 11, 12 and 13.

† 1969 data is considered to be pre-operational for the site. 1974 and 1975 data is considered to be pre-operational for the JAFNPP.

TABLE 7-21
HISTORICAL ENVIRONMENTAL SAMPLE DATA
MILK
Results in pCi/liter

LOCATION: CONTROL **						
Isotope	Cs-137			I-131		
Year	Min.	Max.	Mean	Min.	Max.	Mean
1969†	*	*	*	*	*	*
1974†	*	*	*	*	*	*
1975†	*	*	*	*	*	*
1986	5.3	12.4	8.4	0.8	29.0	13.6
1987	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1988	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1989	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1990	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1991	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1992	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1993	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1994	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1995	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1996	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1997	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1998	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1999	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2000	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2001	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2002	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2003	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2004	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2005	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2006	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2007	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2008	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD

* No data available (sample not required).

** Location used was an available milk sample location in a least prevalent wind direction greater than ten miles from the site.

† 1969 data is considered to be pre-operational for the site. 1974 and 1975 data is considered to be pre-operational for the JAFNPP.

TABLE 7-22
HISTORICAL ENVIRONMENTAL SAMPLE DATA
MILK
Results in pCi/liter

LOCATION: INDICATOR						
Isotope	Cs-137			I-131		
Year	Min.	Max.	Mean	Min.	Max.	Mean
1969†	*	*	*	*	*	*
1974†	1.6	39	10.5	0.70	2.00	1.23
1975†	6.0	22	16	0.01	2.99	0.37
1986	6.1	11.1	8.6	0.3	30.0	5.2
1987	5.5	9.4	7.4	<LLD	<LLD	<LLD
1988	10.0	10.0	10.0	<LLD	<LLD	<LLD
1989	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1990	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1991	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1992	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1993	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1994	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1995	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1996	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1997	<LLD	<LLD	<LLD	0.25	.044	0.35
1998	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
1999	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2000	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2001	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2002	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2003	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2004	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2005	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2006	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2007	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD
2008	<LLD	<LLD	<LLD	<LLD	<LLD	<LLD

* No data available (sample not required).

† 1969 data is considered to be pre-operational for the site. 1974 and 1975 data is considered to be pre-operational for the JAFNPP.

TABLE 7-23
HISTORICAL ENVIRONMENTAL SAMPLE DATA
FOOD PRODUCTS
Results in pCi/g (wet)

LOCATION: CONTROL *			
Isotope	Cs-137		
Year	Min.	Max.	Mean
1969†	**	**	**
1974†	**	**	**
1975†	**	**	**
1986	<LLD	<LLD	<LLD
1987	<LLD	<LLD	<LLD
1988	<LLD	<LLD	<LLD
1989	<LLD	<LLD	<LLD
1990	<LLD	<LLD	<LLD
1991	<LLD	<LLD	<LLD
1992	<LLD	<LLD	<LLD
1993	0.008	0.008	0.008
1994	<LLD	<LLD	<LLD
1995	<LLD	<LLD	<LLD
1996	<LLD	<LLD	<LLD
1997	<LLD	<LLD	<LLD
1998	<LLD	<LLD	<LLD
1999	<LLD	<LLD	<LLD
2000	<LLD	<LLD	<LLD
2001	<LLD	<LLD	<LLD
2002	<LLD	<LLD	<LLD
2003	<LLD	<LLD	<LLD
2004	<LLD	<LLD	<LLD
2005	<LLD	<LLD	<LLD
2006	<LLD	<LLD	<LLD
2007	<LLD	<LLD	<LLD
2008	<LLD	<LLD	<LLD

* Locations was an available food product sample location in a least prevalent wind direction greater than ten miles from the site.

** No data available (control samples not required).

† 1969 data is considered to be pre-operational for the site. 1974 and 1975 data is considered to be pre-operational for the JAFNPP.

TABLE 7-24
HISTORICAL ENVIRONMENTAL SAMPLE DATA
FOOD PRODUCTS
Results in pCi/g (wet)

LOCATION: INDICATOR *			
Isotope	Cs-137		
Year	Min.	Max.	Mean
1969†	**	**	**
1974†	0.04	0.34	0.142
1975†	<MDL	<MDL	<MDL
1986	<LLD	<LLD	<LLD
1987	<LLD	<LLD	<LLD
1988	0.008	0.008	0.008
1989	0.011	0.011	0.011
1990	<LLD	<LLD	<LLD
1991	0.039	0.039	0.039
1992	<LLD	<LLD	<LLD
1993	<LLD	<LLD	<LLD
1994	0.006	0.012	0.010
1995	0.011	0.012	0.012
1996	<LLD	<LLD	<LLD
1997	0.013	0.013	0.013
1998	<LLD	<LLD	<LLD
1999	0.007	0.007	0.007
2000	<LLD	<LLD	<LLD
2001	<LLD	<LLD	<LLD
2002	<LLD	<LLD	<LLD
2003	<LLD	<LLD	<LLD
2004	<LLD	<LLD	<LLD
2005	<LLD	<LLD	<LLD
2006	<LLD	<LLD	<LLD
2007	<LLD	<LLD	<LLD
2008	<LLD	<LLD	<LLD

* Indicator locations were available downwind locations within ten miles of the site and with high deposition potential.

** No data available (control samples not required).

† 1969 data is considered to be pre-operational for the site. 1974 and 1975 data is considered to be pre-operational for the JAFNPP.

8.0 QA/QC PROGRAM

8.1 PROGRAM DESCRIPTION

The Offsite Dose Calculation Manual (ODCM), Part 1, Section 5.3 requires that the licensee participate in an Interlaboratory Comparison Program. The Interlaboratory Comparison Program shall include sample media for which samples are routinely collected and for which comparison samples are commercially available. Participation in an Interlaboratory Comparison Program ensures that independent checks on the precision and accuracy of the measurement of radioactive material in the environmental samples are performed as part of the Quality Assurance Program for environmental monitoring. To fulfill the requirement for an Interlaboratory Comparison Program, the JAF Environmental Laboratory has engaged the services of Eckert & Ziegler Analytics, Incorporated in Atlanta, Georgia.

Analytics supplies sample media as blind sample spikes, which contain certified levels of radioactivity unknown to the analysis laboratory. These samples are prepared and analyzed by the JAF Environmental Laboratory using standard laboratory procedures. Analytics issues a statistical summary report of the results. The JAF Environmental Laboratory uses predetermined acceptance criteria methodology for evaluating the laboratory's performance.

The JAF Environmental Laboratory also analyzes laboratory blanks. The analysis of laboratory blanks provides a means to detect and measure radioactive contamination of analytical samples. The analysis of analytical blanks also provides information on the adequacy of background subtraction. Laboratory blank results are analyzed using control charts.

It is important to note that the JAF Environmental Laboratory has participated in the NEI/NIST MAP for several years. There were 2 NIST samples included as part of the blind samples received each year. The JAF Environmental Laboratory was not able to participate in the program for 2008. This program is no longer sponsored by NEI. The NIST program has been cut back and did not meet our QC needs for 2008. We are still working with NIST to stay involved in the NIST MAP for 2009, if it can meet our QC needs.

8.2 PROGRAM SCHEDULE

SAMPLE MEDIA	LABORATORY ANALYSIS	SAMPLE PROVIDER ANALYTICS
Water	Gross Beta	3
Water	Tritium	5
Water	I-131	4
Water	Mixed Gamma	4
Air	Gross Beta	3
Air	I-131	4
Air	Mixed Gamma	2
Milk	I-131	3
Milk	Mixed Gamma	3
Soil	Mixed Gamma	1
Vegetation	Mixed Gamma	2
TOTAL SAMPLE INVENTORY		34

8.3 ACCEPTANCE CRITERIA

Each sample result is evaluated to determine the accuracy and precision of the laboratory's analysis result. The sample evaluation method is discussed below.

8.3.1 SAMPLE RESULTS EVALUATION

Samples provided by Analytics are evaluated using what is specified as the NRC method. This method is based on the calculation of the ratio of results reported by the participating laboratory (QC result) to the Vendor Laboratory Known value (reference result).

An Environmental Laboratory analytical result is evaluated using the following calculation:

The value for the error resolution is calculated.

$$\text{The error resolution} = \frac{\text{Reference Result}}{\text{Reference Results Error (1 sigma)}}$$

Using the appropriate row under the Error Resolution column in Table 8.3.1 below, a corresponding Ratio of Agreement interval is given.

The value for the ratio is then calculated.

$$\text{Ratio of Agreement} = \frac{\text{QC Result}}{\text{Reference Result}}$$

If the value falls within the agreement interval, the result is acceptable.

TABLE 8.3.1

ERROR RESOLUTION	RATIO OF AGREEMENT
< 4	No Comparison
4 to 7	0.5 to 2.0
8 to 15	0.6 to 1.66
16 to 50	0.75 to 1.33
51 to 200	0.8 to 1.25
>200	0.85 to 1.18

This acceptance test is generally referred to as the "NRC" method. The acceptance criteria is contained in Procedure EN-CY-102. The NRC method generally results in an acceptance range of approximately $\pm 25\%$ of the Known value when applied to sample results from the Eckert & Ziegler Analytics Interlaboratory Comparison Program. This method is used as the procedurally required assessment method and requires the generation of a deviation from QA/QC program report when results are unacceptable.

8.4 PROGRAM RESULTS SUMMARY

The Interlaboratory Comparison Program numerical results are provided on Table 8-1.

8.4.1 ECKERT & ZIEGLER ANALYTICS QA SAMPLES RESULTS

Thirty-four QA blind spike samples were analyzed as part of Analytics 2008 Interlaboratory Comparison Program. The following sample media were evaluated as part of the comparison program.

- Air Charcoal Cartridge: I-131
- Air Particulate Filter: Mixed Gamma Emitters, Gross Beta
- Water: I-131, Mixed Gamma Emitters, Tritium, Gross Beta
- Soil: Mixed Gamma Emitters
- Milk: I-131, Mixed Gamma Emitters
- Vegetation: Mixed Gamma Emitters

The JAF Environmental Laboratory performed 130 individual analyses on the 34 QA samples. Of the 130 analyses performed, 130 were in agreement using the NRC acceptance criteria for a 100% agreement ratio.

There were no non-conformities in the 2008 program.

8.4.2 NUMERICAL RESULTS TABLES

**TABLE 8-1
INTERLABORATORY INTERCOMPARISON PROGRAM
Gross Beta Analysis of Air Particulate Filter**

DATE	SAMPLE ID NO.	MEDIUM	ANALYSIS	JAF ELAB RESULTS pCi ±1 sigma	REF. LAB* pCi ±1 sigma	RATIO (1)
06/19/2008	E5914-05	Filter	Gross Beta	57.0 ± 1.9	52.2 ± 0.871	1.07
				57.8 ± 1.9		
				52.9 ± 1.9		
				Mean = 55.9 ± 1.1		
06/19/2008	E5940-09	Filter	Gross Beta	51.7 ± 0.8	49.2 ± 0.822	1.04
				51.4 ± 0.8		
				51.0 ± 0.8		
				Mean = 51.4 ± 0.5		
12/11/2008	E6368-05	Filter	Gross Beta	123.6 ± 1.9	113 ± 1.89	1.09
				125.5 ± 1.9		
				119.9 ± 1.9		
				Mean = 123 ± 1.1		

(1) Ratio = Reported/Analytics.

* Sample provided by Eckert & Ziegler Analytics

A=Acceptable

U=Unacceptable

TABLE 8-1 (Continued)
Tritium Analysis of Water

DATE	SAMPLE ID NO.	MEDIUM	ANALYSIS	JAF ELAB RESULTS pCi/liter ±1 sigma	REF. LAB* pCi/liter ±1 sigma	RATIO (1)
3/20/2008	E5822-05	Water	H-3	4265 ± 170 4244 ± 170 4201 ± 169 Mean = 4237 ± 98	4010 ± 67	1.06 A
6/19/2008	E5913-05	Water	H-3	860 ± 136 994 ± 137 832 ± 136 Mean = 895 ± 79	843 ± 14.1	1.06 A
9/18/2008	E6248-05	Water	H-3	1017 ± 134 978 ± 134 937 ± 134 Mean = 977 ± 77	996 ± 16.6	0.98 A
12/11/2008	E6359-09	Water	H-3	10501 ± 207 10401 ± 207 10441 ± 207 Mean = 10448 ± 120	1.02E+04 ± 1.70E+02	1.02 A
12/11/2008	E6360-09	Water	H-3	10483 ± 207 10564 ± 208 10355 ± 206 Mean = 10467 ± 120	1.02E+04 ± 1.70E+02	1.03 A

(1) Ratio = Reported/Analytics.

* Sample provided by Eckert & Ziegler Analytics

A=Acceptable

U=Unacceptable

TABLE 8-1 (Continued)
Gross Beta Analysis of Water

DATE	SAMPLE ID NO.	MEDIUM	ANALYSIS	JAF ELAB RESULTS pCi/liter ±1 sigma	REF. LAB* pCi/liter ±1 sigma	RATIO (1)
03/20/2008	E5822-05	Water	Gross Beta	2.26E+02 ± 2.30E+00 2.29E+02 ± 2.30E+00 2.23E+02 ± 2.30E+00 Mean = 2.26E+02 ± 1.33E+00	2.30E+02 ± 3.84E+00	0.98 A
06/19/2008	E5919-05	Water	Gross Beta	1.38E+02 ± 1.80E+00 1.40E+02 ± 1.80E+00 1.37E+02 ± 1.70E+00 Mean = 1.38E+02 ± 1.02E+00	1.49E+02 ± 2.49E+00	0.93 A
09/18/2008	E6253-05	Water	Gross Beta	2.76E+02 ± 2.60E+00 2.76E+02 ± 2.60E+00 2.75E+02 ± 2.60E+00 Mean = 2.76E+02 ± 1.50E+00	2.90E+02 ± 4.85E+00	0.95 A

(1) Ratio = Reported/Analytics.

* Sample provided by Eckert & Ziegler Analytics

A=Acceptable

U=Unacceptable

TABLE 8-1 (Continued)
I-131 Gamma Analysis of Air Charcoal

DATE	SAMPLE ID NO.	MEDIUM	ANALYSIS	JAF ELAB RESULTS pCi ±1 sigma	REF. LAB* pCi ±1 sigma	RATIO (1)
3/20/2008	E5845-09	Air	I-131	65.8 ± 2.95 63.7 ± 2.88 61.7 ± 3.13 Mean = 63.7 ± 1.73	60.0 ± 1.0	1.06 A
6/19/2008	E5917-05	Air	I-131	79.8 ± 4.1 81.4 ± 3.02 85.8 ± 3.51 Mean = 82.3 ± 2.06	84.8 ± 1.42	0.97 A
9/18/2008	E6301-09	Air	I-131	87.4 ± 2.6 85.3 ± 2.62 92.5 ± 2.86 Mean = 88.4 ± 1.56	87.7 ± 1.46	1.01 A
9/18/2008	E6252-05	Air	I-131	83.6 ± 3.29 90.1 ± 2.57 83.1 ± 2.69 Mean = 85.6 ± 1.66	82.0 ± 1.37	1.04 A

(1) Ratio = Reported/Analytics.

* Sample provided by Eckert & Ziegler Analytics

A=Acceptable

U=Unacceptable

TABLE 8-1 (Continued)
INTERLABORATORY INTERCOMPARISON PROGRAM
Gamma Analysis of Water

DATE	SAMPLE ID NO.	MEDIUM	ANALYSIS	JAF ELAB RESULTS pCi/liter ±1 sigma	REF. LAB* pCi/liter ±1 sigma	RATIO (1)
3/20/2008	E5820-05	Water	Ce-141	208 ± 5.87	198 ± 3.31	1.04 A
				200 ± 8.89		
			Cr-51	210 ± 8.46	286 ± 4.77	1.11 A
				Mean = 206 ± 4.5		
			Cs-134	320 ± 27.1	99.7 ± 1.67	1.08 A
				280 ± 34.8		
			Cs-137	349 ± 33.4	116 ± 1.94	1.07 A
				Mean = 316 ± 18.4		
			Co-58	105 ± 3.89	56.4 ± 0.941	1.03 A
				109 ± 6		
Mn-54	109 ± 5.42	75 ± 1.25	1.10 A			
	Mean = 108 ± 3.0					
Fe-59	120 ± 4.23	81.4 ± 1.36	1.07 A			
	137 ± 6.1					
Zn-65	116 ± 5.64	109 ± 1.82	1.05 A			
	Mean = 124 ± 3.1					
Co-60	55.7 ± 3.55	188 ± 3.14	1.02 A			
	66.1 ± 4.81					
I-131**	51.8 ± 4.76	70.4 ± 1.18	1.04 A			
	Mean = 57.9 ± 2.5					

(1) Ratio = Reported/Aalytics.

* Sample provided by Eckert & Ziegler Analytics

** Result determined by Resin Extraction/Gamma Spectral Analysis.

A=Acceptable

U=Unacceptable

TABLE 8-1 (Continued)
INTERLABORATORY INTERCOMPARISON PROGRAM
Gamma Analysis of Water

DATE	SAMPLE ID NO.	MEDIUM	ANALYSIS	JAF ELAB RESULTS pCi/liter ±1 sigma	REF. LAB* pCi/liter ±1 sigma	RATIO (1)
6/19/2008	E5939-09	Water	Ce-141	252 ± 3.35	237 ± 3.96	1.04 A
				235 ± 7.01		
			Cr-51	252 ± 2.93	188 ± 3.14	1.10 A
				Mean = 246 ± 2.8		
			Cs-134	213 ± 13.8	104 ± 1.74	1.08 A
				192 ± 23.4		
			Cs-137	215 ± 13.1	158 ± 2.64	1.00 A
				Mean = 207 ± 10.1		
			Co-58	112 ± 1.71	84 ± 1.41	1.06 A
				115 ± 4.29		
Mn-54	109 ± 1.58	184 ± 3.07	1.10 A			
	Mean = 112 ± 1.6					
Fe-59	160 ± 1.95	125 ± 2.08	1.09 A			
	154 ± 4.46					
Zn-65	161 ± 1.84	172 ± 2.88	1.08 A			
	Mean = 158 ± 1.7					
Co-60	90 ± 1.66	142 ± 2.37	1.03 A			
	91 ± 3.85					
I-131**	89 ± 1.59	45.3 ± 0.756	0.92 A			
	Mean = 90 ± 1.5					

(1) Ratio = Reported/Analytics.

* Sample provided by Eckert & Ziegler Analytics

** Result determined by Resin Extraction/Gamma Spectral Analysis.

A=Acceptable

U=Unacceptable

TABLE 8-1 (Continued)
INTERLABORATORY INTERCOMPARISON PROGRAM
Gamma Analysis of Water

DATE	SAMPLE ID NO.	MEDIUM	ANALYSIS	JAF ELAB RESULTS pCi/liter ±1 sigma	REF. LAB* pCi/liter ±1 sigma	RATIO (1)
9/18/2008	E6249-05	Water	Ce-141	108 ± 6.03	107 ± 1.78	1.04 A
				113 ± 4.98		
			Cr-51	109 ± 4.9	279 ± 4.65	1.08 A
				115 ± 4.42		
			Cs-134	111 ± 2.6	154 ± 2.56	1.11 A
				Mean = 335 ± 31.3		
			Cs-137	268 ± 20.8	107 ± 1.79	1.03 A
				297 ± 23.3		
			Co-58	307 ± 20.7	118 ± 1.97	1.06 A
				Mean = 302 ± 12.2		
Mn-54	197 ± 5.89	110 ± 1.84	1.13 A			
	143 ± 8.08					
Fe-59	168 ± 4.9	96 ± 1.6	1.13 A			
	176 ± 4.14					
Zn-65	Mean = 171 ± 3.0	211 ± 3.53	1.05 A			
	116 ± 5.11					
Co-60	114 ± 3.98	155 ± 2.59	1.02 A			
	102 ± 3.88					
I-131**	110 ± 3.46	105 ± 1.75	1.00 A			
	Mean = 111 ± 2.1					
	128 ± 5.16					
	125 ± 3.98					
	119 ± 4					
	128 ± 3.77					
	Mean = 125 ± 2.1					
	122 ± 5.4					
	118 ± 4.02					
	131 ± 4.24					
	127 ± 3.68					
	Mean = 125 ± 2.2					
	111 ± 6.1					
	105 ± 4.37					
	103 ± 4.5					
	115 ± 4.11					
	Mean = 109 ± 2.4					
	218 ± 10.9					
	217 ± 8.18					
	239 ± 8.68					
	216 ± 7.7					
	Mean = 223 ± 4.5					
	162 ± 4.47					
	149 ± 3.39					
	158 ± 3.52					
	163 ± 3.08					
	Mean = 158 ± 1.8					
	109 ± 2.21					
	102 ± 2.06					
	105 ± 2.03					
	Mean = 105 ± 1.2					

(1) Ratio = Reported/Analytics.

* Sample provided by Eckert & Ziegler Analytics

** Result determined by Resin Extraction/Gamma Spectral Analysis.

A=Acceptable

U=Unacceptable

TABLE 8-1 (Continued)
INTERLABORATORY INTERCOMPARISON PROGRAM
Gamma Analysis of Water

DATE	SAMPLE ID NO.	MEDIUM	ANALYSIS	JAF ELAB RESULTS pCi/liter ±1 sigma	REF. LAB* pCi/liter ±1 sigma	RATIO (1)
12/11/2008	E6361-09	Water	Ce-141	240 ± 4.38	224 ± 3.74	1.06 A
				229 ± 5.95		
				244 ± 4.4		
			Mean =	238 ± 2.9		
			Cr-51	324 ± 20.5	288 ± 4.81	0.99 A
				274 ± 26.6		
				254 ± 22.8		
			Mean =	284 ± 13.5		
			Cs-134	169 ± 2.4	157 ± 2.62	1.05 A
				162 ± 3.46		
165 ± 2.76						
Mean =	165 ± 1.7					
Cs-137	139 ± 2.2	140 ± 2.34	0.99 A			
	136 ± 2.95					
	140 ± 2.63					
Mean =	138 ± 1.5					
Co-58	123 ± 2.29	122.0 ± 2.03	1.02 A			
	126 ± 3.24					
	125 ± 2.71					
Mean =	124.7 ± 1.6					
Mn-54	189 ± 2.59	178 ± 2.97	1.04 A			
	183 ± 3.43					
	183 ± 3.01					
Mean =	185 ± 1.7					
Fe-59	136 ± 3.26	117.0 ± 1.96	1.09 A			
	122 ± 4.29					
	126 ± 3.97					
Mean =	128 ± 2.2					
Zn-65	222 ± 4.54	214 ± 3.57	1.06 A			
	228 ± 6.06					
	230 ± 5.21					
Mean =	227 ± 3.1					
Co-60	163 ± 1.79	156 ± 2.6	1.04 A			
	162 ± 2.36					
	160 ± 2.16					
Mean =	162 ± 1.2					
I-131**	74.8 ± 7.12	64.1 ± 1.07	1.03 A			
	58.3 ± 4.07					
	64.1 ± 7.2					
Mean =	65.7 ± 3.6					

(1) Ratio = Reported/Analytics.

* Sample provided by Eckert & Ziegler Analytics

** Result determined by Resin Extraction/Gamma Spectral Analysis.

A=Acceptable

U=Unacceptable

TABLE 8-1 (Continued)
INTERLABORATORY INTERCOMPARISON PROGRAM
Gamma Analysis of Milk

DATE	SAMPLE ID NO.	MEDIUM	ANALYSIS	JAF ELAB RESULTS pCi/liter ±1 sigma	REF. LAB* pCi/liter ±1 sigma	RATIO (1)
3/20/2008	E5846-09	Milk	Ce-141	240 ± 13.8	249 ± 4.2	0.97 A
				245 ± 11.9		
				236 ± 6.8		
				Mean = 240 ± 6.5		
			Cr-51	371 ± 65.6	359 ± 6.0	1.04 A
				384 ± 50.4		
				370 ± 30.2		
				Mean = 375 ± 29.4		
			Cs-134	115 ± 11.4	125 ± 2.1	0.96 A
				121 ± 8.0		
				124 ± 6.0		
Mean = 120 ± 5.1						
Cs-137	147 ± 10.9	146 ± 2.4	0.97 A			
	143 ± 8.9					
	135 ± 5.1					
	Mean = 142 ± 5.0					
Co-58	70.2 ± 10.1	71.0 ± 1.2	0.96 A			
	64.2 ± 7.2					
	70.4 ± 4.6					
	Mean = 68.3 ± 4.4					
Mn-54	95.2 ± 10.6	94 ± 1.6	1.08 A			
	107 ± 8.1					
	102 ± 4.7					
	Mean = 101 ± 4.7					
Fe-59	120 ± 15.2	102 ± 1.7	1.12 A			
	125 ± 10.6					
	98 ± 6.6					
	Mean = 114 ± 6.6					
Zn-65	119 ± 27.3	137 ± 2.3	0.99 A			
	158 ± 15.1					
	128 ± 9.9					
	Mean = 135 ± 10.9					
Co-60	239 ± 10.9	236 ± 4.0	0.98 A			
	225 ± 8.4					
	229 ± 5.1					
	Mean = 231 ± 4.9					
I-131**	59.6 ± 8.6	60.0 ± 1.0	1.01 A			
	61.7 ± 6.5					
	60.7 ± 5.5					
	Mean = 60.7 ± 4.0					

(1) Ratio = Reported/Analytics.

* Sample provided by Eckert & Ziegler Analytics

** Result determined by Resin Extraction/Gamma Spectral Analysis.

A=Acceptable

U=Unacceptable

TABLE 8-1 (Continued)
INTERLABORATORY INTERCOMPARISON PROGRAM
Gamma Analysis of Milk

DATE	SAMPLE ID NO.	MEDIUM	ANALYSIS	JAF ELAB RESULTS pCi/liter ±1 sigma	REF. LAB* pCi/liter ±1 sigma	RATIO (1)
6/19/2008	E5915-05	Milk	Ce-141	173 ± 6.4	174 ± 2.91	1.01 A
				177 ± 7.9		
				177 ± 6.8		
				Mean = 176 ± 4.1		
			Cr-51	185 ± 24.7	138 ± 2.31	1.21 A
				163 ± 30.8		
				152 ± 30.7		
				Mean = 167 ± 16.7		
			Cs-134	81 ± 3.6	77 ± 1.28	1.07 A
				80 ± 5.3		
				85 ± 4.4		
Mean = 82 ± 2.6						
Cs-137	113 ± 4.1	116 ± 1.94	1.00 A			
	114 ± 5.5					
	122 ± 5.0					
	Mean = 116 ± 2.8					
Co-58	59.6 ± 3.6	61.9 ± 1.03	0.99 A			
	54.9 ± 4.3					
	70.1 ± 4.4					
	Mean = 61.5 ± 2.4					
Mn-54	145 ± 4.5	135 ± 2.26	1.09 A			
	146 ± 6.1					
	149 ± 5.5					
	Mean = 147 ± 3.1					
Fe-59	94 ± 4.9	92 ± 1.53	1.05 A			
	99 ± 6.9					
	97 ± 5.7					
	Mean = 97 ± 3.4					
Zn-65	120 ± 7.5	127 ± 2.12	0.98 A			
	132 ± 10.1					
	123 ± 9.3					
	Mean = 125 ± 5.2					
Co-60	111 ± 3.2	104 ± 1.74	1.04 A			
	104 ± 4.1					
	108 ± 3.8					
	Mean = 108 ± 2.1					
I-131**	58.9 ± 2.7	71 ± 1.19	0.88 A			
	66.6 ± 2.9					
	62.1 ± 3.0					
	Mean = 62.5 ± 1.7					

(1) Ratio = Reported/Analytics.

* Sample provided by Eckert & Ziegler Analytics

** Result determined by Resin Extraction/Gamma Spectral Analysis.

A=Acceptable

U=Unacceptable

TABLE 8-1 (Continued)
INTERLABORATORY INTERCOMPARISON PROGRAM
Gamma Analysis of Milk

DATE	SAMPLE ID NO.	MEDIUM	ANALYSIS	JAF ELAB RESULTS pCi/liter ±1 sigma	REF. LAB* pCi/liter ±1 sigma	RATIO (1)
9/18/2008	E6251-05	Milk	Ce-141	168 ± 7.29	161 ± 2.69	1.05 A
				172 ± 7.69		
			Mean =	168 ± 6.76	421 ± 7.03	1.03 A
				169 ± 4.19		
			Cr-51	411 ± 34.9	232 ± 3.87	1.03 A
				429 ± 37.2		
			Mean =	456 ± 32.0	162 ± 2.71	1.02 A
				432 ± 20.1		
			Cs-134	241 ± 7.47	179 ± 2.98	1.01 A
				241 ± 7.81		
Mean =	236 ± 6.49	166 ± 2.77	1.14 A			
	239 ± 4.20					
Cs-137	167 ± 5.86	144 ± 2.41	1.04 A			
	173 ± 6.86					
Mean =	155 ± 5.23	319 ± 5.33	1.01 A			
	165 ± 3.48					
Co-58	188 ± 6.03	234 ± 3.91	1.02 A			
	177 ± 6.60					
Mean =	177 ± 5.34	67.9 ± 1.13	0.89 A			
	181 ± 3.47					
Mn-54	193 ± 6.24	60.7 ± 1.09				
	189 ± 7.16					
Mean =	184 ± 5.65					
	189 ± 3.68					
Fe-59	150 ± 6.92					
	143 ± 7.97					
Mean =	158 ± 3.63					
	150 ± 3.72					
Zn-65	326 ± 13.3					
	302 ± 15.1					
Mean =	342 ± 11.9					
	323 ± 7.79					
Co-60	242 ± 5.31					
	242 ± 6.25					
Mean =	231 ± 4.75					
	238 ± 3.16					
I-131**	61.3 ± 2.17					
	61.6 ± 1.73					
Mean =	59.3 ± 1.75					
	60.7 ± 1.09					

(1) Ratio = Reported/Analytcs.

* Sample provided by Eckert & Ziegler Analytcs

** Result determined by Resin Extraction/Gamma Spectral Analysis.

A=Acceptable
U=Unacceptable

TABLE 8-1 (Continued)
INTERLABORATORY INTERCOMPARISON PROGRAM
Gamma Analysis of Air Particulate Filter

DATE	SAMPLE ID NO.	MEDIUM	ANALYSIS	JAF ELAB RESULTS pCi ±1 sigma	REF. LAB* pCi ±1 sigma	RATIO (1)
3/20/2008	E5821-05	Filter	Ce-141	204 ± 2.42	179 ± 2.99	1.09 A
				192 ± 4.23		
				189 ± 4.24		
				Mean = 195 ± 2.15		
			Cr-51	305 ± 10.7	259 ± 4.32	1.15 A
				300 ± 18.0		
				289 ± 20.9		
				Mean = 298 ± 9.86		
			Cs-134	102 ± 2.64	90.2 ± 1.51	1.18 A
				107 ± 4.06		
110 ± 4.50						
Mean = 106.3 ± 2.20						
Cs-137	115 ± 2.40	105 ± 1.75	1.11 A			
	116 ± 3.81					
	120 ± 4.42					
	Mean = 117 ± 2.10					
Co-58	57 ± 2.00	51.0 ± 0.852	1.10 A			
	56.4 ± 3.06					
	55.5 ± 3.48					
	Mean = 56.3 ± 1.68					
Mn-54	80.6 ± 2.18	67.8 ± 1.13	1.23 A			
	85.3 ± 3.48					
	85.1 ± 4.19					
	Mean = 84 ± 1.96					
Fe-59	94.7 ± 3.03	73.7 ± 1.23	1.22 A			
	86.3 ± 4.94					
	88.9 ± 5.80					
	Mean = 90.0 ± 2.73					
Zn-65	116 ± 4.59	98.6 ± 1.65	1.19 A			
	124 ± 7.13					
	111 ± 8.56					
	Mean = 117 ± 4.02					
Co-60	182 ± 2.55	170 ± 2.84	1.06 A			
	181 ± 3.91					
	176 ± 4.65					
	Mean = 180 ± 2.20					

(1) Ratio = Reported/Analytics.

* Sample provided by Eckert & Ziegler Analytics

A=Acceptable

U=Unacceptable

TABLE 8-1 (Continued)
INTERLABORATORY INTERCOMPARISON PROGRAM
Gamma Analysis of Air Particulate Filter

DATE	SAMPLE ID NO.	MEDIUM	ANALYSIS	JAF ELAB RESULTS pCi ±1 sigma	REF. LAB* pCi ±1 sigma	RATIO (1)
9/18/2008	E6250-05	Filter	Ce-141	170 ± 4.28	159 ± 2.65	1.07 A
				170 ± 3.6		
				172 ± 3.95		
				Mean = 171 ± 2.3		
			Cr-51	431 ± 25.1	415 ± 6.92	1.11 A
				452 ± 21.2		
				497 ± 21.6		
				Mean = 460 ± 13.1		
			Cs-134	267 ± 7.48	229 ± 3.82	1.16 A
				257 ± 6.33		
270 ± 6.1						
Mean = 265 ± 3.8						
Cs-137	163 ± 5.88	160 ± 2.67	1.02 A			
	163 ± 4.96					
	162 ± 4.71					
	Mean = 163 ± 3.0					
Co-58	179 ± 6.18	176 ± 2.93	1.08 A			
	200 ± 5.36					
	191 ± 4.91					
	Mean = 190 ± 3.2					
Mn-54	185 ± 6.69	164 ± 2.73	1.18 A			
	196 ± 5.68					
	199 ± 5.21					
	Mean = 193 ± 3.4					
Fe-59	169 ± 7.73	142 ± 2.37	1.16 A			
	164 ± 6.55					
	160 ± 5.79					
	Mean = 164 ± 3.9					
Zn-65	345 ± 14	314 ± 5.25	1.15 A			
	371 ± 12.6					
	366 ± 10.8					
	Mean = 361 ± 7.2					
Co-60	228 ± 5.87	231 ± 3.85	1.01 A			
	238 ± 4.89					
	231 ± 4.45					
	Mean = 232 ± 2.9					

(1) Ratio = Reported/Aalytics.

* Sample provided by Eckert & Ziegler Analytics

A=Acceptable

U=Unacceptable

TABLE 8-1 (Continued)
INTERLABORATORY INTERCOMPARISON PROGRAM
Gamma Analysis of Soil

DATE	SAMPLE ID NO.	MEDIUM	ANALYSIS	JAF ELAB RESULTS pCi/g \pm 1 sigma	REF. LAB* pCi/g \pm 1 sigma	RATIO (1)
6/19/2008	E5916-05	Soil	Ce-141	0.359 \pm 0.015	0.380 \pm 0.006	0.98 A
				0.364 \pm 0.014		
				0.381 \pm 0.008		
				0.386 \pm 0.013		
				Mean = 0.373 \pm 0.006		
			Cr-51	0.345 \pm 0.089	0.302 \pm 0.005	1.03 A
				0.276 \pm 0.056		
				0.346 \pm 0.035		
				0.277 \pm 0.059		
				Mean = 0.311 \pm 0.031		
Cs-134	0.173 \pm 0.011	0.167 \pm 0.003	1.03 A			
	0.167 \pm 0.010					
	0.164 \pm 0.005					
	0.182 \pm 0.006					
	Mean = 0.172 \pm 0.004					
Cs-137	0.317 \pm 0.012	0.340 \pm 0.006	0.96 A			
	0.324 \pm 0.012					
	0.334 \pm 0.006					
	0.333 \pm 0.007					
	Mean = 0.327 \pm 0.005					
Co-58	0.117 \pm 0.011	0.135 \pm 0.002	0.89 A			
	0.122 \pm 0.009					
	0.118 \pm 0.005					
	0.123 \pm 0.006					
	Mean = 0.120 \pm 0.004					
Mn-54	0.289 \pm 0.013	0.295 \pm 0.005	1.02 A			
	0.301 \pm 0.012					
	0.314 \pm 0.006					
	0.294 \pm 0.007					
	Mean = 0.300 \pm 0.005					
Fe-59	0.173 \pm 0.015	0.200 \pm 0.003	0.93 A			
	0.194 \pm 0.014					
	0.185 \pm 0.007					
	0.190 \pm 0.010					
	Mean = 0.186 \pm 0.006					
Zn-65	0.257 \pm 0.020	0.277 \pm 0.005	0.98 A			
	0.289 \pm 0.018					
	0.281 \pm 0.009					
	0.256 \pm 0.011					
	Mean = 0.271 \pm 0.008					
Co-60	0.220 \pm 0.009	0.228 \pm 0.004	0.93 A			
	0.206 \pm 0.008					
	0.214 \pm 0.004					
	0.208 \pm 0.005					
	Mean = 0.212 \pm 0.003					

(1) Ratio = Reported/Analytics.

* Sample provided by Eckert & Ziegler Analytics

A=Acceptable

U=Unacceptable

TABLE 8-1 (Continued)
INTERLABORATORY INTERCOMPARISON PROGRAM
Gamma Analysis of Vegetation

DATE	SAMPLE ID NO.	MEDIUM	ANALYSIS	JAF ELAB RESULTS pCi/g ± 1 sigma	REF. LAB* pCi/g ± 1 sigma	RATIO (1)
6/19/2008	E5918-05	Vegetation	Ce-141	0.381 ± 0.019	0.390 ± 0.007	0.95 A
				0.371 ± 0.015		
				0.358 ± 0.013		
				Mean = 0.370 ± 0.009		
			Cr-51	0.311 ± 0.081	0.309 ± 0.005	1.14 A
				0.371 ± 0.065		
				0.378 ± 0.054		
				Mean = 0.353 ± 0.039		
			Cs-134	0.171 ± 0.016	0.172 ± 0.003	1.03 A
0.176 ± 0.013						
0.184 ± 0.010						
Mean = 0.177 ± 0.008						
Cs-137	0.272 ± 0.015	0.260 ± 0.004	0.98 A			
	0.257 ± 0.013					
	0.235 ± 0.011					
	Mean = 0.255 ± 0.008					
Co-58	0.152 ± 0.013	0.138 ± 0.002	1.03 A			
	0.142 ± 0.011					
	0.131 ± 0.009					
	Mean = 0.142 ± 0.006					
Mn-54	0.293 ± 0.016	0.302 ± 0.005	1.02 A			
	0.325 ± 0.015					
	0.306 ± 0.012					
	Mean = 0.308 ± 0.008					
Fe-59	0.207 ± 0.018	0.205 ± 0.003	1.04 A			
	0.215 ± 0.017					
	0.219 ± 0.014					
	Mean = 0.214 ± 0.009					
Zn-65	0.306 ± 0.027	0.284 ± 0.005	0.97 A			
	0.240 ± 0.022					
	0.282 ± 0.019					
	Mean = 0.276 ± 0.013					
Co-60	0.216 ± 0.011	0.233 ± 0.004	0.95 A			
	0.235 ± 0.011					
	0.212 ± 0.008					
	Mean = 0.221 ± 0.006					

(1) Ratio = Reported/Analytics.

* Sample provided by Eckert & Ziegler Analytics

A=Acceptable

U=Unacceptable

TABLE 8-1 (Continued)
INTERLABORATORY INTERCOMPARISON PROGRAM
Gamma Analysis of Vegetation

DATE	SAMPLE ID NO.	MEDIUM	ANALYSIS	JAF ELAB RESULTS pCi/g ±1 sigma	REF. LAB* pCi/g ±1 sigma	RATIO (1)	
9/18/2008	E6302-09	Vegetation	Ce-141	0.447 ± 0.023	0.474 ± 0.008	0.96 A	
				0.447 ± 0.017			
				0.473 ± 0.018			
				Mean = 0.456 ± 0.011			
			Cr-51	1.200 ± 0.129	1.240 ± 0.021	0.95 A	
				1.160 ± 0.086			
				1.170 ± 0.098			
			Cr-51	Mean = 1.177 ± 0.061			
				Cs-134	0.760 ± 0.031	0.683 ± 0.011	1.08 A
					0.738 ± 0.024		
0.708 ± 0.026							
Mean = 0.735 ± 0.016							
Cs-137	0.407 ± 0.024	0.477 ± 0.008	0.87 A				
	0.422 ± 0.017						
	0.417 ± 0.020						
	Mean = 0.415 ± 0.012						
Co-58	0.552 ± 0.027	0.525 ± 0.009	0.98 A				
	0.500 ± 0.019						
	0.492 ± 0.020						
	Mean = 0.515 ± 0.013						
Mn-54	0.467 ± 0.027	0.489 ± 0.008	1.01 A				
	0.503 ± 0.019						
	0.518 ± 0.022						
	Mean = 0.496 ± 0.013						
Fe-59	0.382 ± 0.030	0.425 ± 0.007	0.97 A				
	0.432 ± 0.021						
	0.428 ± 0.025						
	Mean = 0.414 ± 0.015						
Zn-65	0.808 ± 0.056	0.939 ± 0.016	0.94 A				
	0.917 ± 0.040						
	0.930 ± 0.046						
	Mean = 0.885 ± 0.027						
Co-60	0.673 ± 0.024	0.690 ± 0.012	0.95 A				
	0.659 ± 0.016						
	0.632 ± 0.018						
	Mean = 0.655 ± 0.008						

(1) Ratio = Reported/Analytics.

* Sample provided by Eckert & Ziegler Analytics

A=Acceptable

U=Unacceptable

8.5 REFERENCES

- 8.5.1 Radioactivity and Radiochemistry, The Counting Room: Special Edition, 1994 Caretaker Publications, Atlanta, Georgia.
- 8.5.2 Data Reduction and Error Analysis for the Physical Sciences, Bevington P.R., McGraw Hill, New York (1969).


9.0 GRAPHICAL PRESENTATIONS

This section includes graphic representation of selected sample results.


For graphic representation, results reported LLD are considered to be at the "Zero" level of activity.

Sample location results specified as "Indicator" and "Control" on the graphs can be referenced back to Section 3.3 for specific locations.


James A. FitzPatrick N.P.P.
 Fish Cs-137
 Figure 9.1

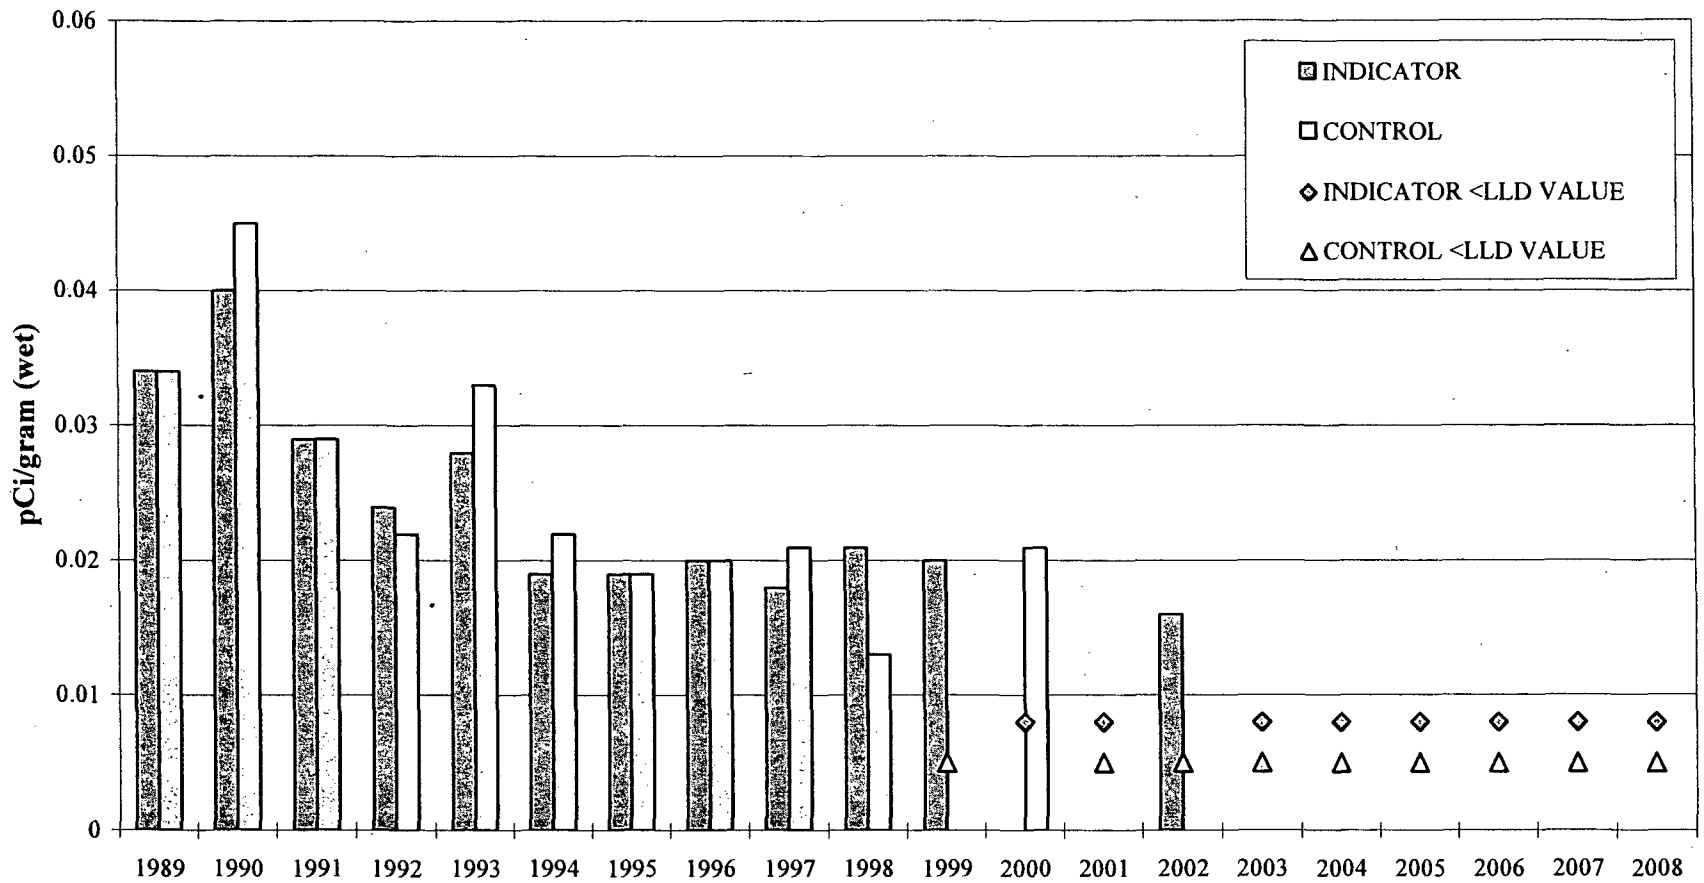


James A. FitzPatrick N.P.P.
 Surface Water - Tritium
 Figure 9.2

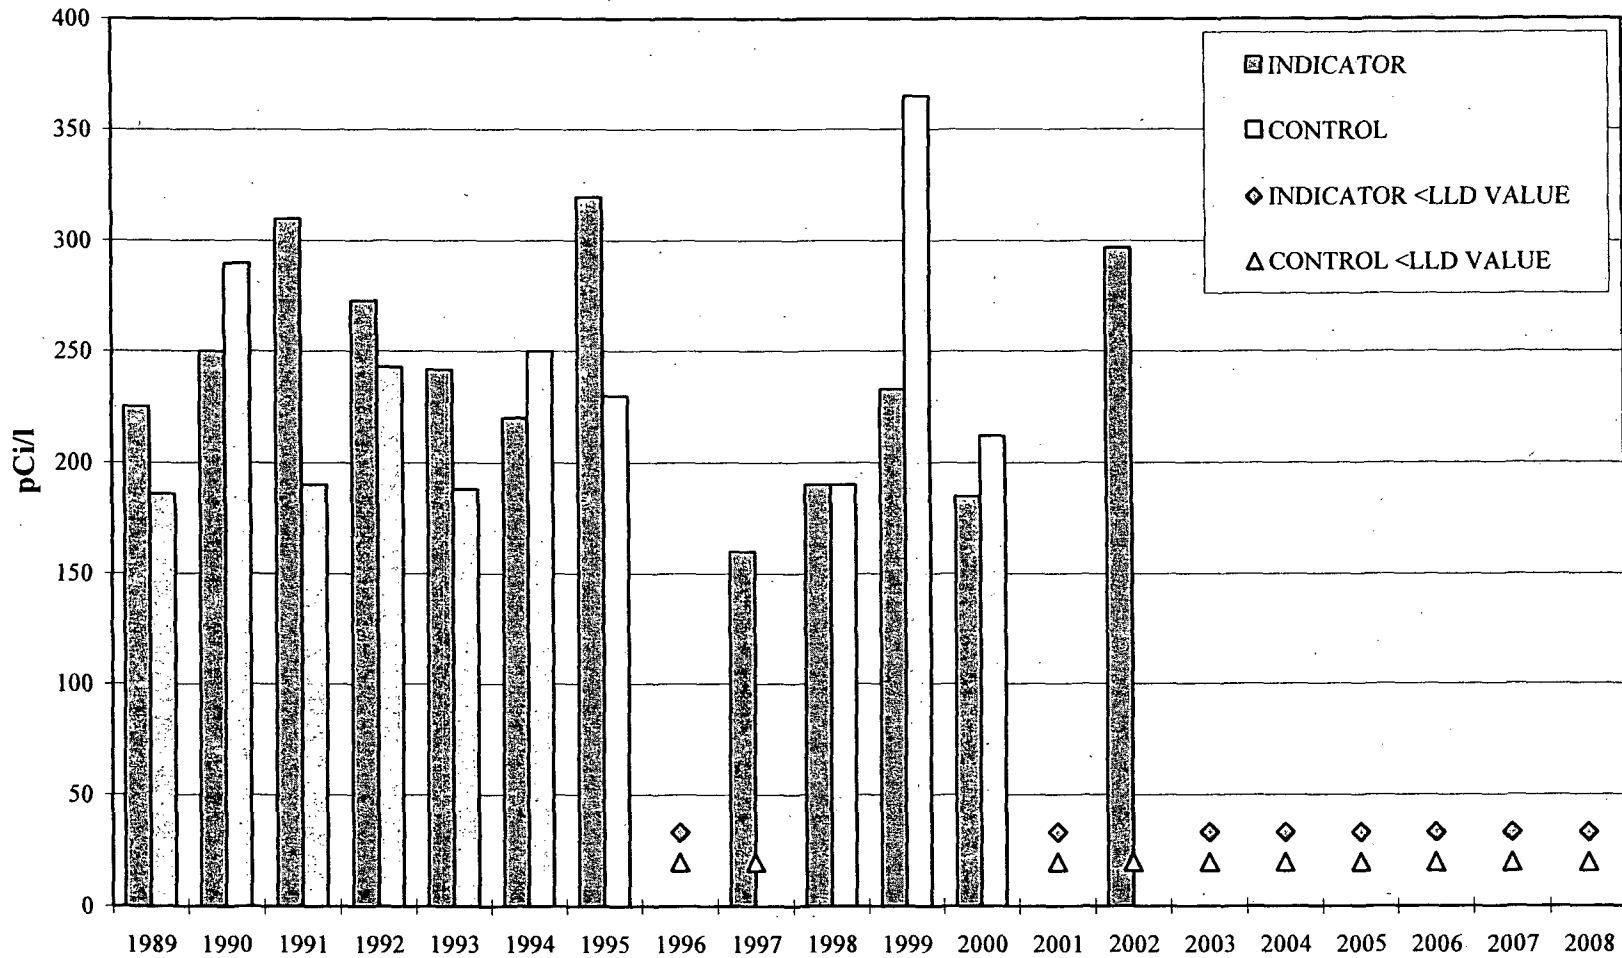


James A. FitzPatrick N.P.P.
Air Particulate Filter - Gross Beta
Figure 9.3

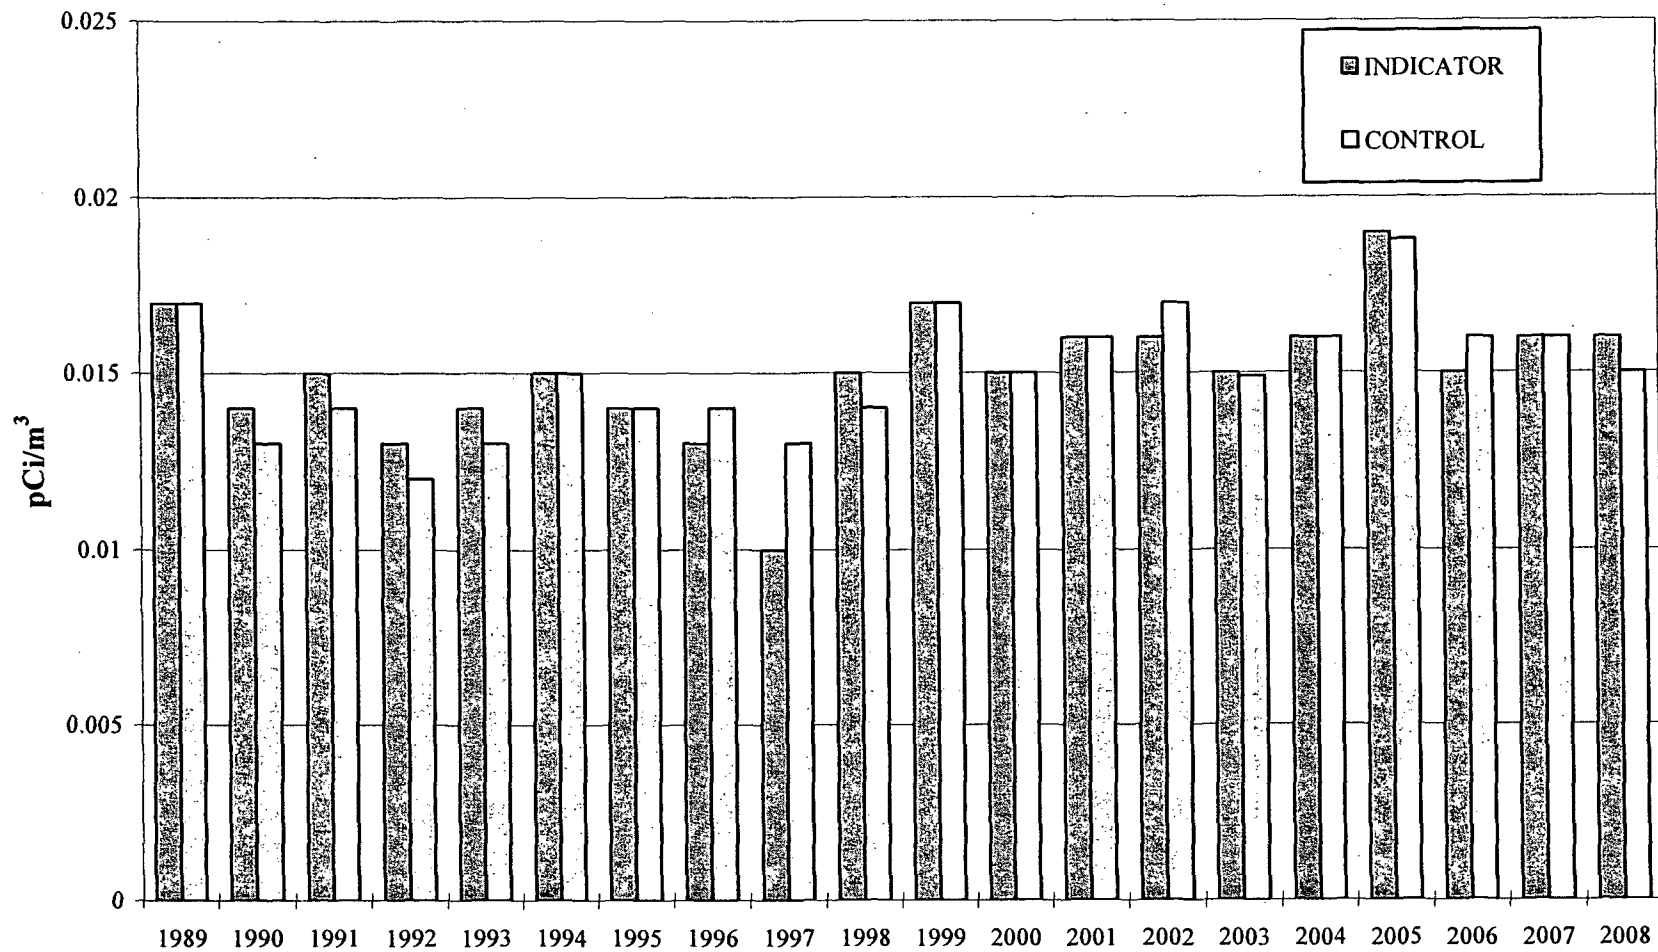


James A. FitzPatrick N.P.P.
Air Particulate Filter - Gross Beta
Figure 9.4

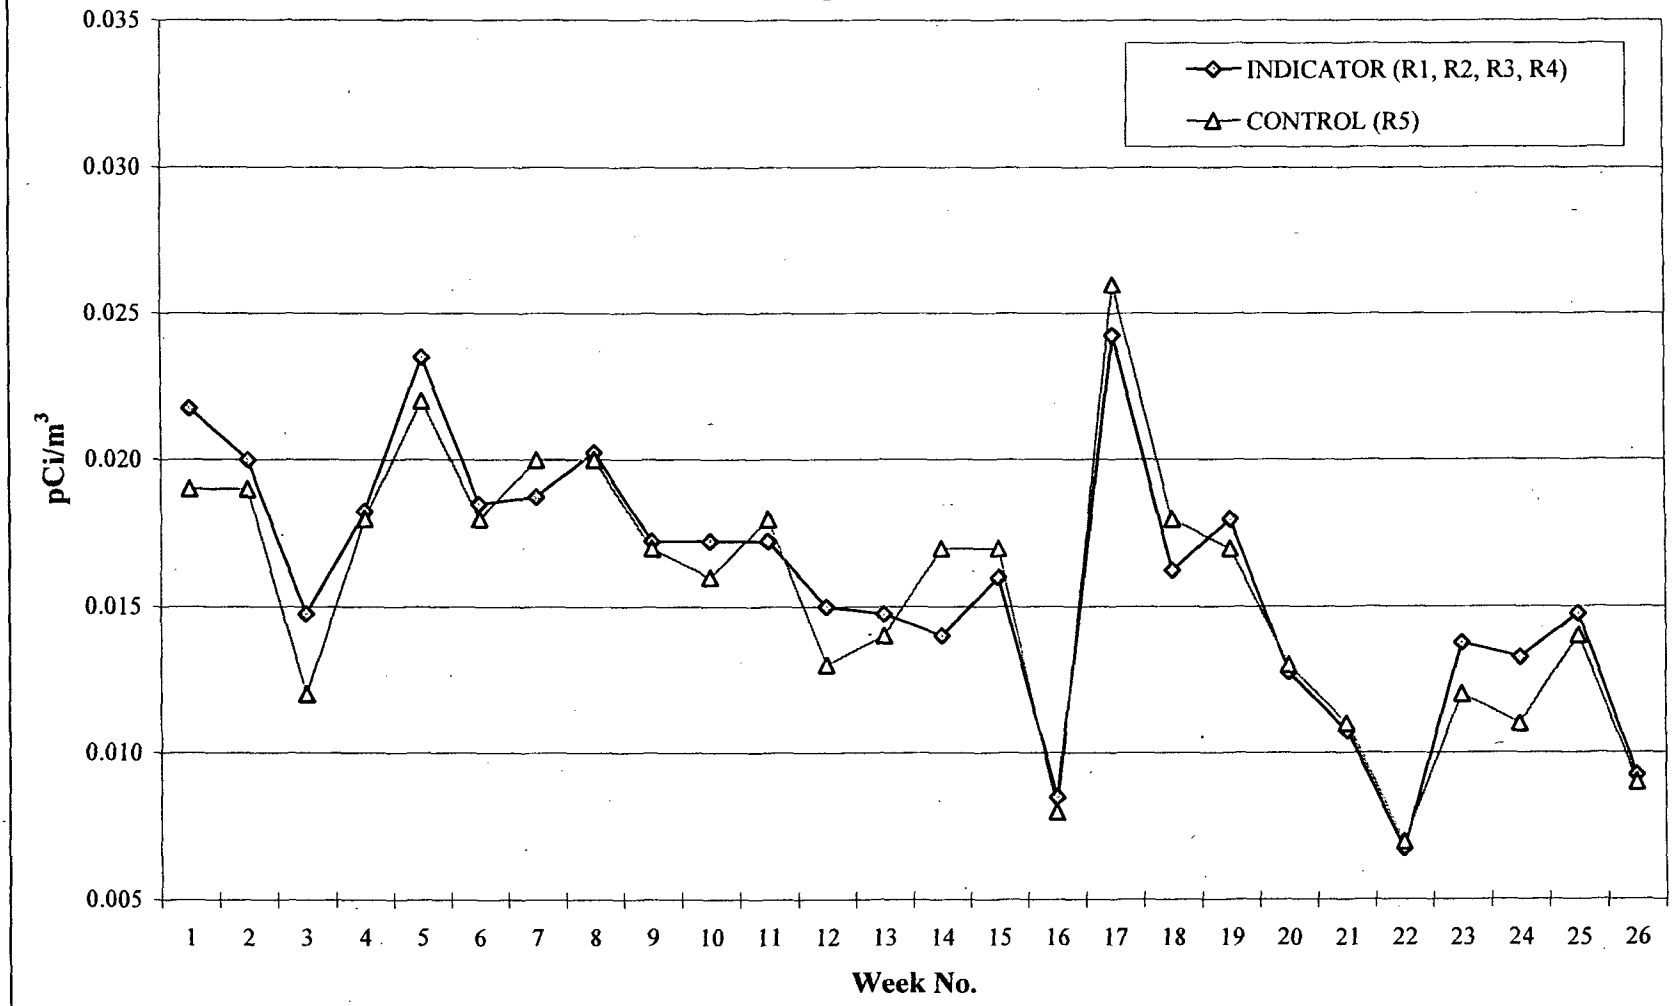


James A. FitzPatrick N.P.P.
Air Particulate Filter - Gross Beta
Figure 9.5

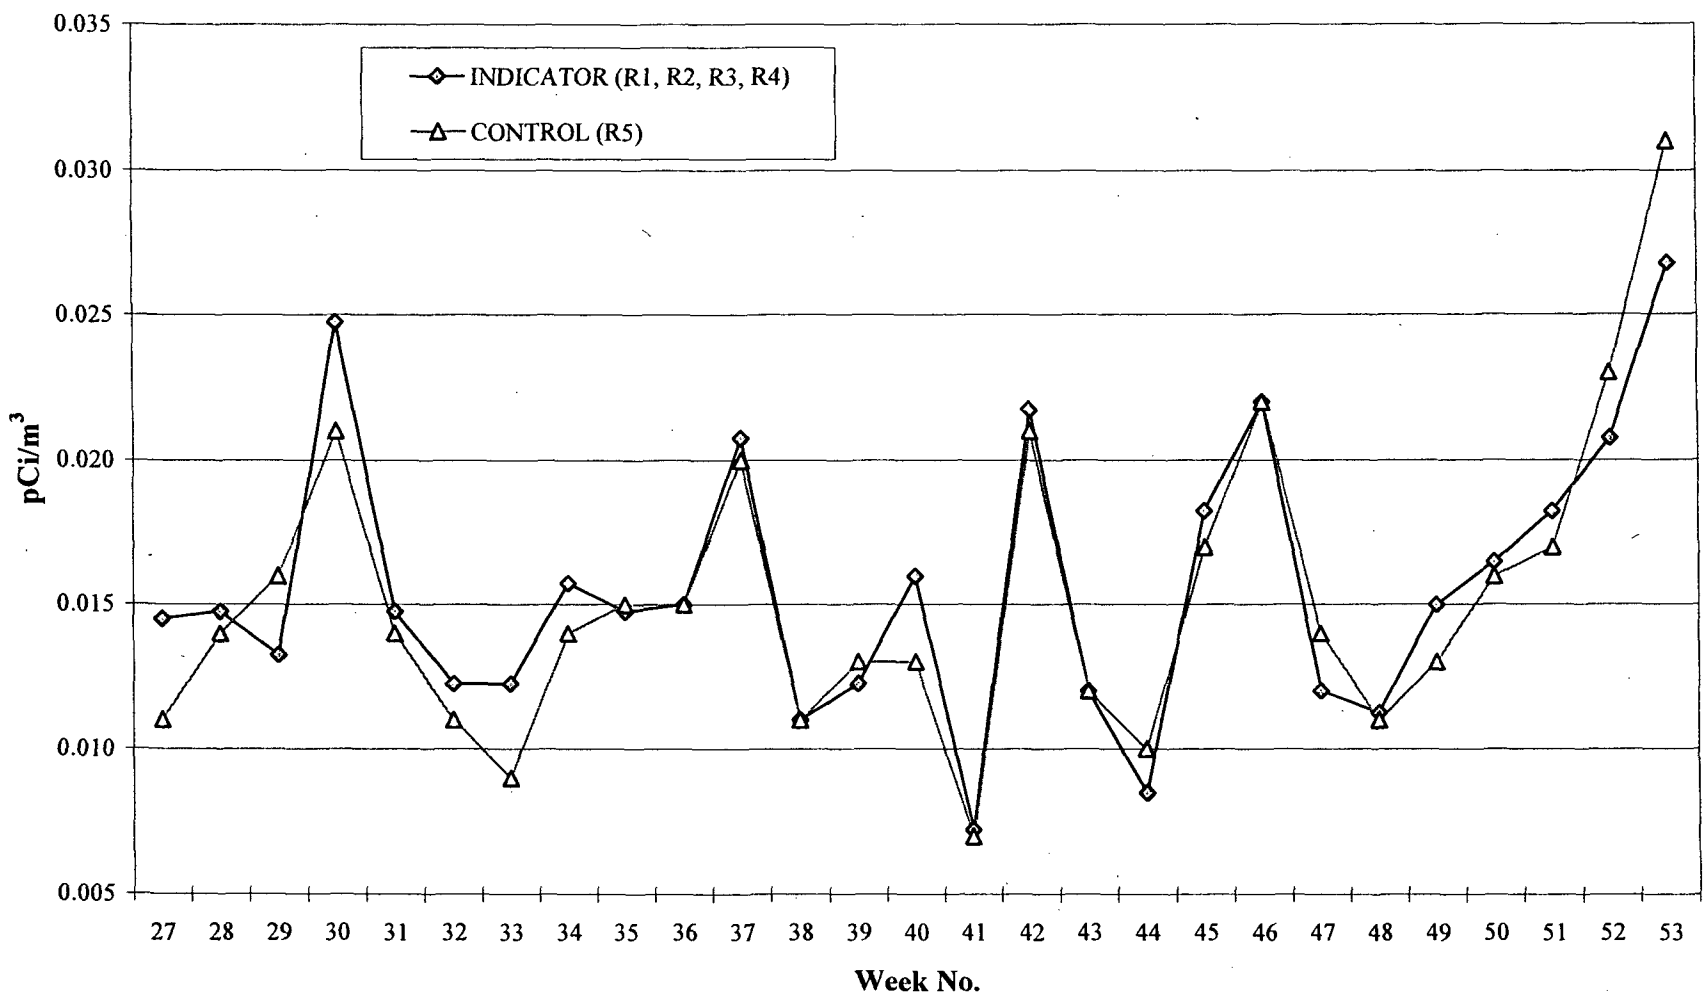


James A. FitzPatrick N.P.P.
Air Particulate Filter Composite Co-60
Figure 9.6

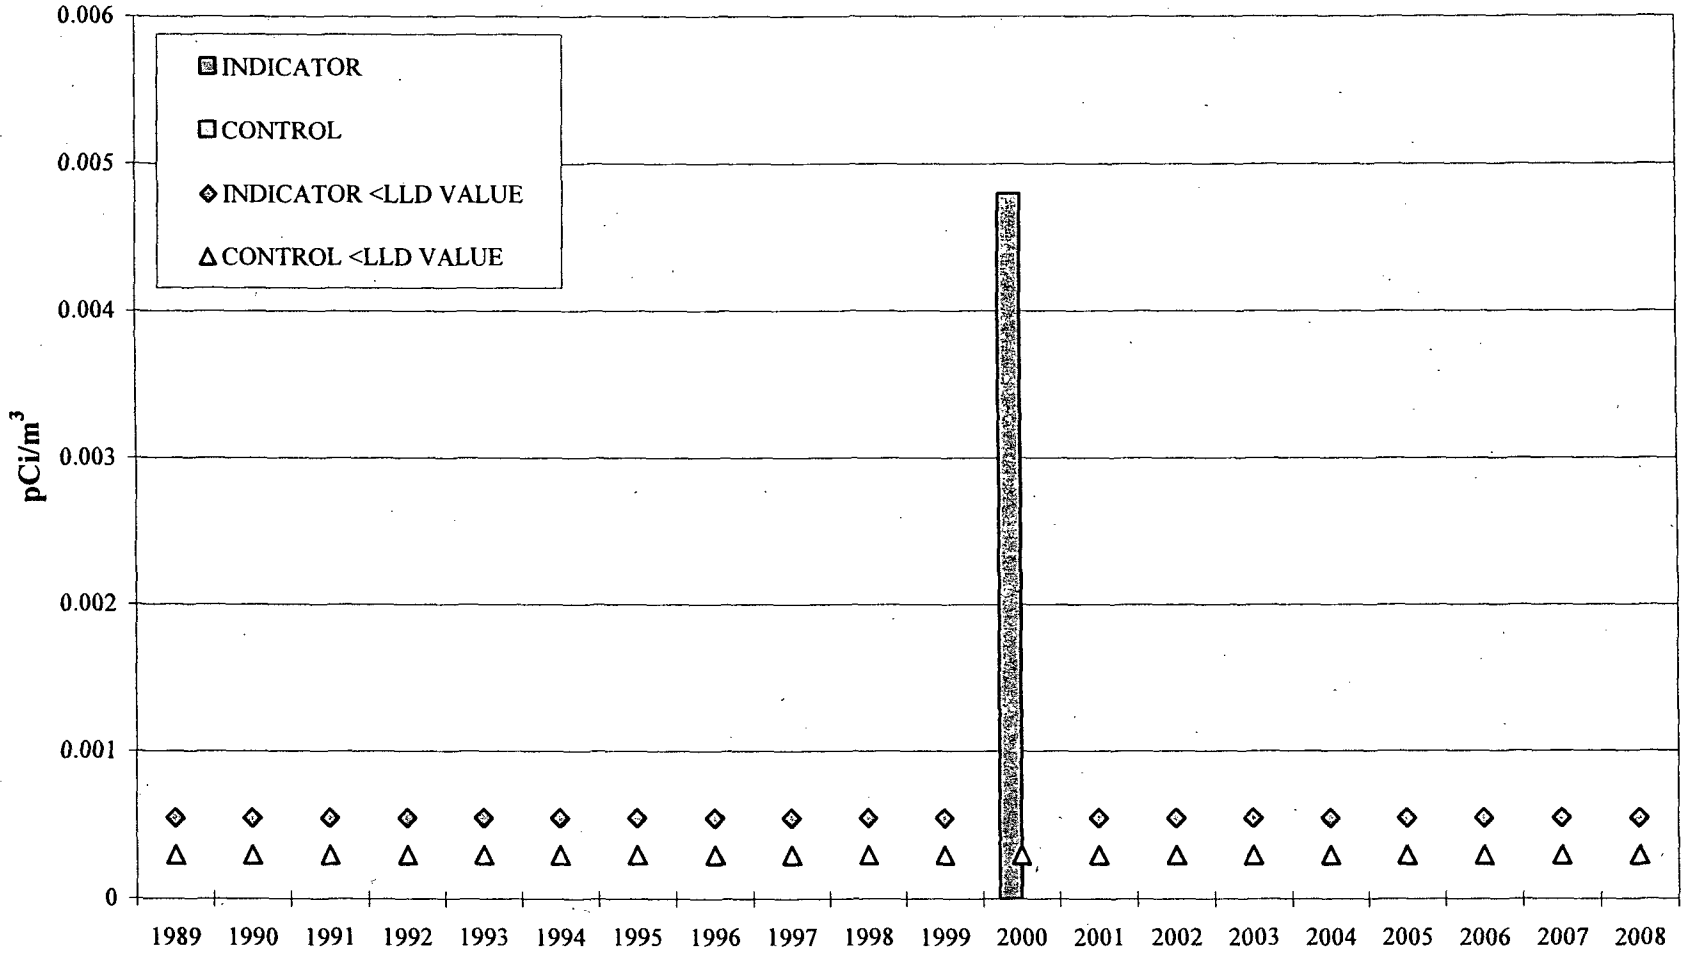


James A. FitzPatrick N.P.P.
Air Particulate Filter Composite Cs-137
Figure 9.7

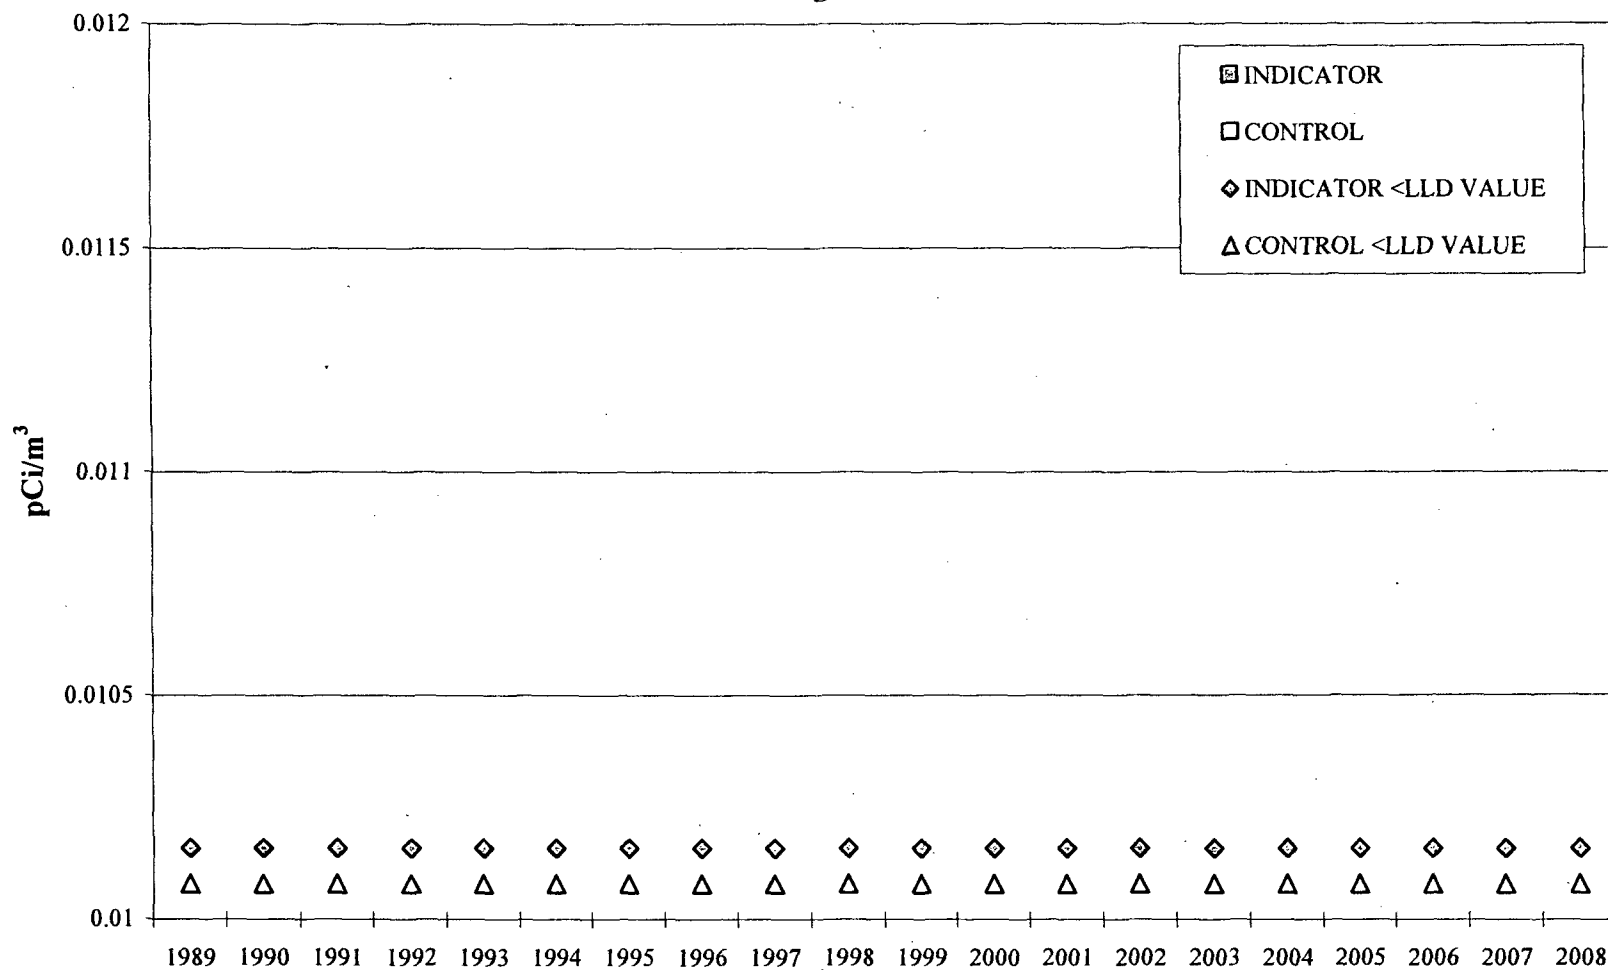


James A. FitzPatrick N.P.P.
Air Charcoal I-131
Figure 9.8

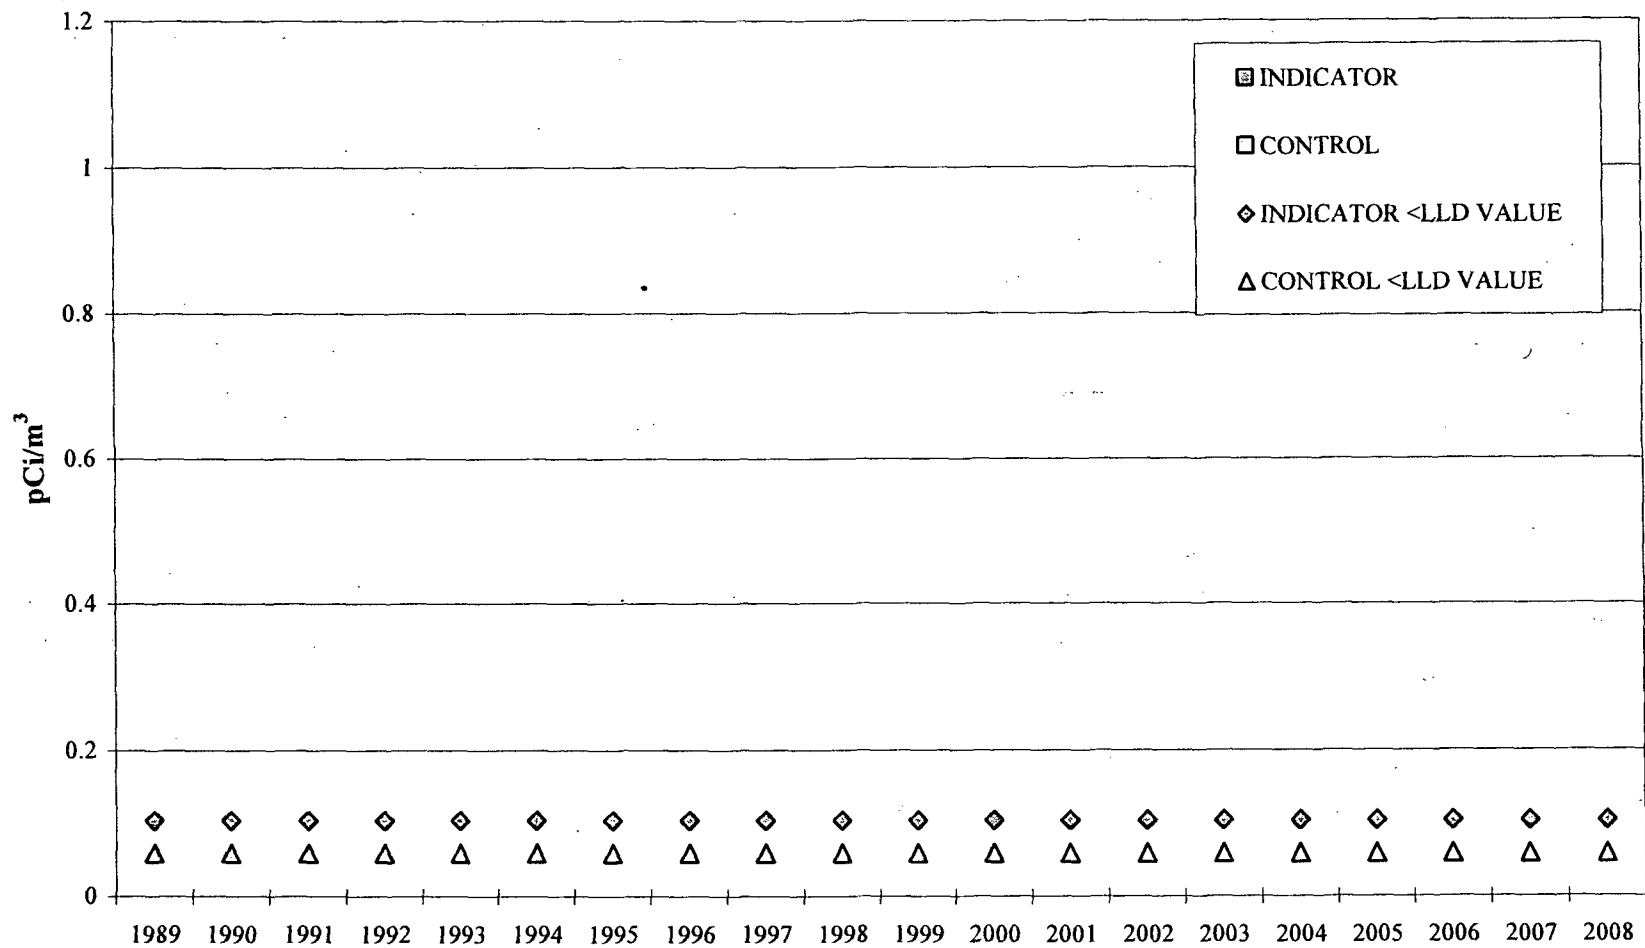

James A. FitzPatrick N.P.P.
Milk Cs-137
Figure 9.9

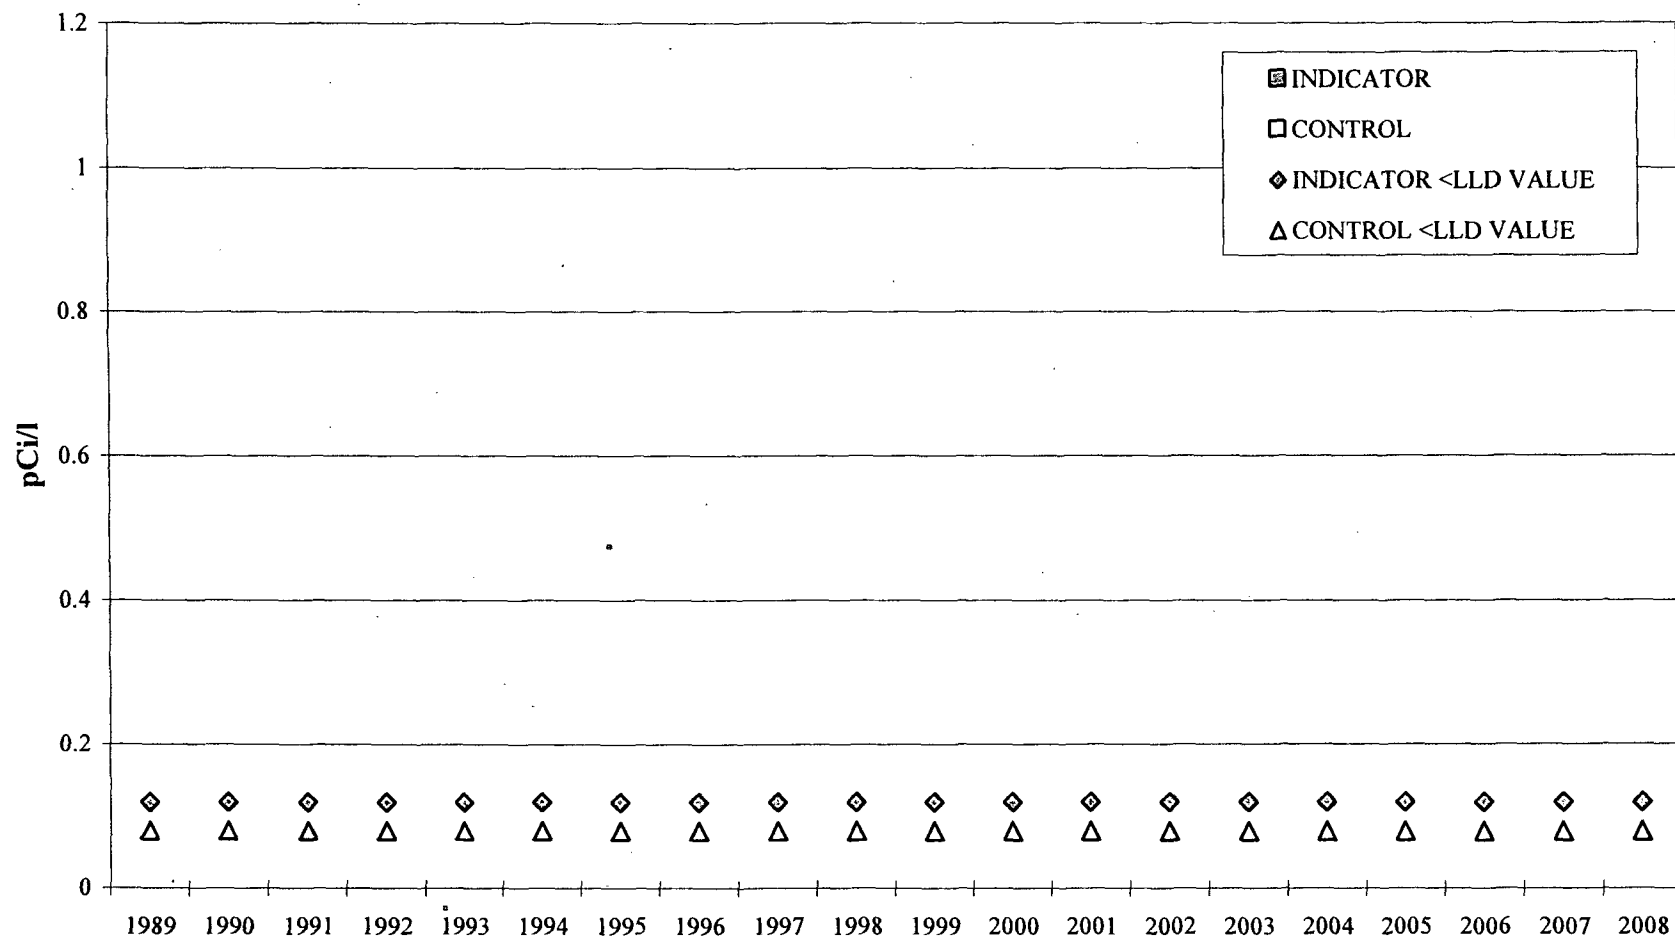


James A. FitzPatrick N.P.P.
Milk I-131
Figure 9.10

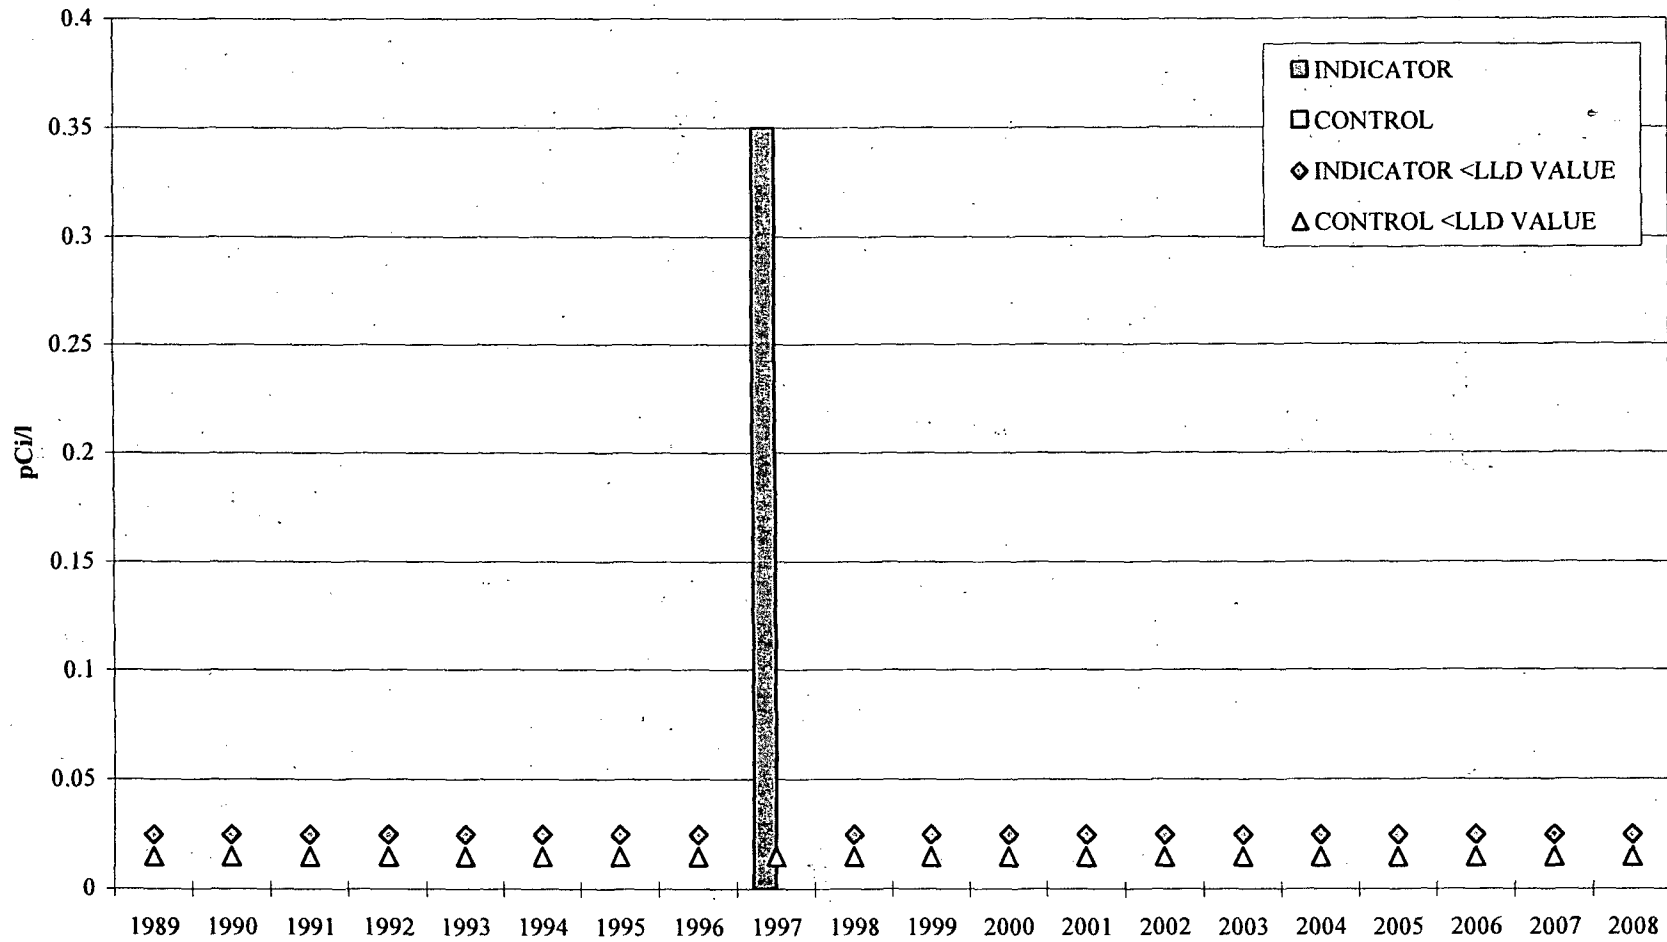

James A. FitzPatrick N.P.P.

TLD Data

Figure 9.11

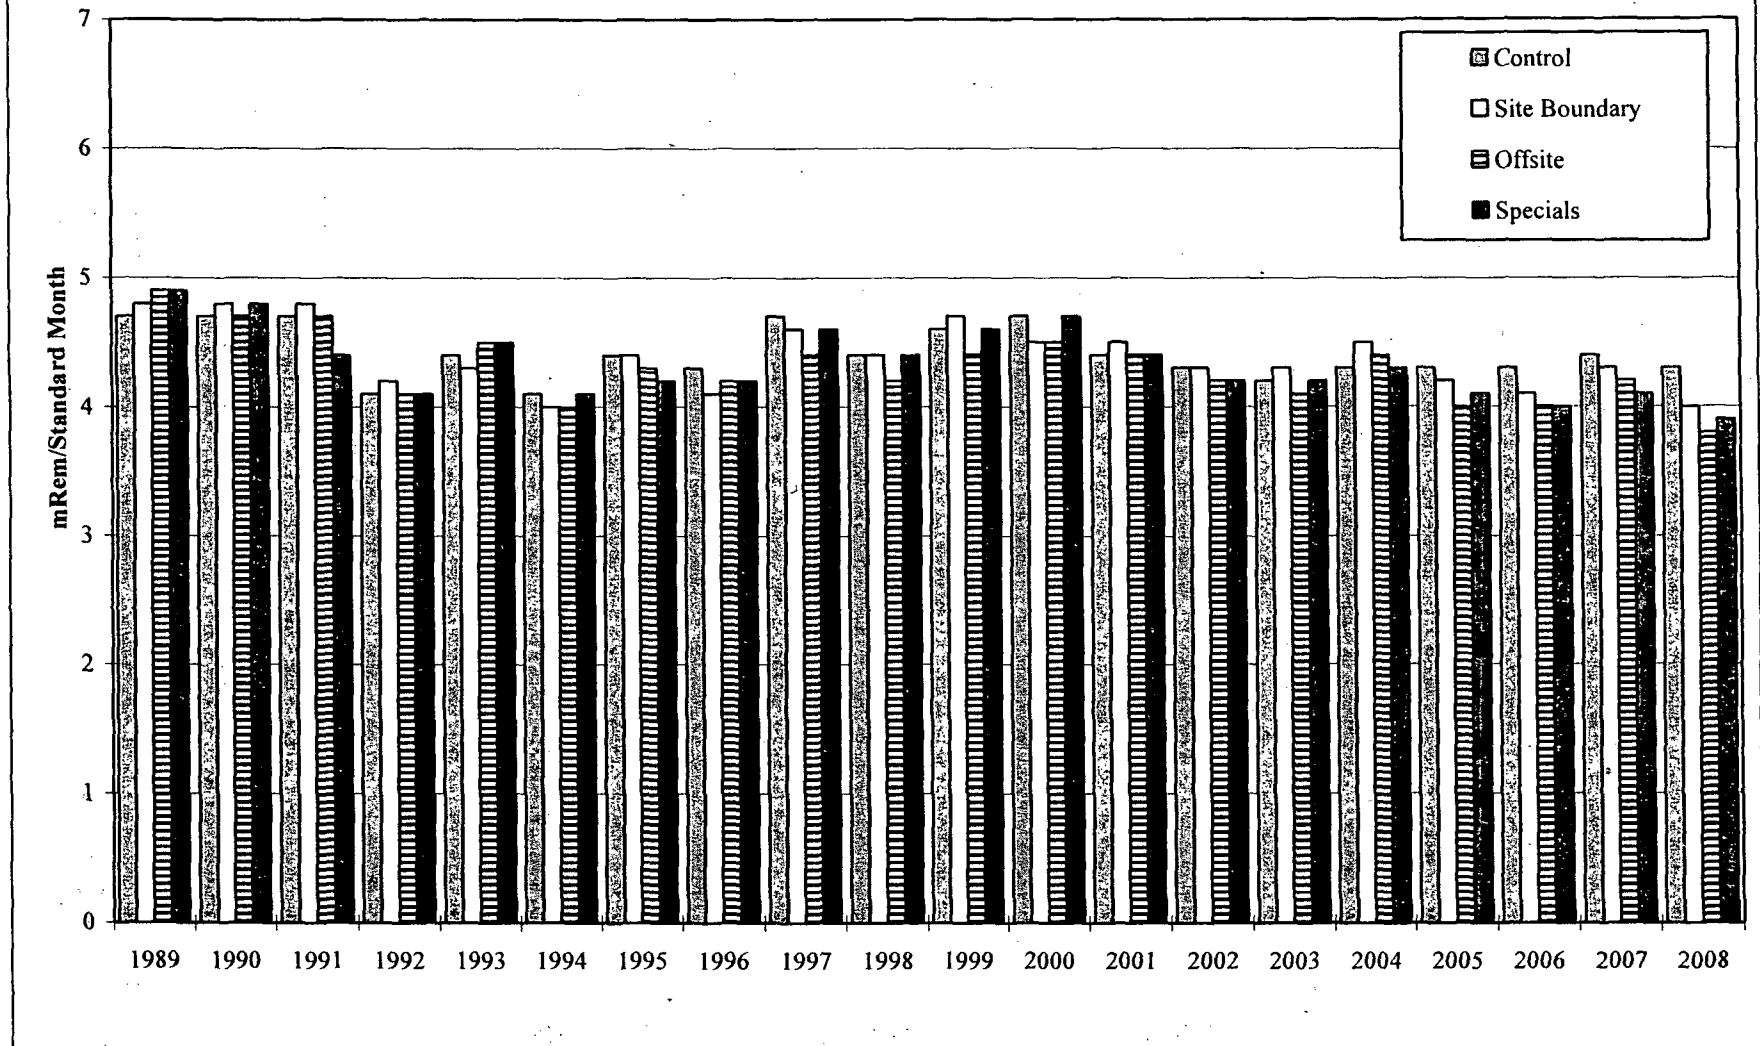

XEROX Document Binder Cover - Classic White
1-800-822-2200 Reorder no: 3R8864 1/2" Cover for 91 to 120 sheets