

To : DOCUMENT CONTROL DESK
 Facility : MP Department : 806
 Address : NUC REGULATORY COMMISSION (0140)
 DOCUMENT CONTROL DESK
 WASHINGTON, DC 20555


From : NDS CONT DOCUMENTS
 Date/Time : 03/30/04 10:25

Trans No. : 000057295 Transmittal Group Id: 04090JEP-1
 Total Items: 00001

PASSPORT DOCUMENT

TRANSMITTAL

Page: 1



Item	Facility	Type	Sub	Document Number / Title	Sheet	Revision	Doc Date	Copy #	Media	Copies
* 0001	MP	PROC	OPS	C SP 600.4 COMMUNICATION RADIOPAGING AND ENRS PRACTICE AND WEEKLY OPERABILITY		000			P	01

Please check the appropriate response and return form to NDS Bldg 475/3
 Millstone Power Station or Fax to 860-440-2057.

- All documents received.
- Documents noted above not received (identify those not received).
- I no longer require distribution of these documents.

Date: _____ Signature: _____

ADHS

2/27/03
Approval Date

3/07/03
Effective Date

Procedure Action Request

Document No.: C SP 600.4	Writer: Chris Hollaway Initiator: Chris Hollaway	Rev. No. 000	Minor Rev. 00
--------------------------	---	--------------	---------------

Title: COMMUNICATION RADIOPAGING ENRS DAILY WEEKLY OPERABILITY TEST

For New Documents Document is QA DH Title Supv-Nuc Shift Operations U3

<input checked="" type="checkbox"/> Revision	<input type="checkbox"/> Minor Revision	<input type="checkbox"/> Cleanup Revision	<input type="checkbox"/> Biennial Review
<input type="checkbox"/> Cancel	<input type="checkbox"/> Void (Do Not Use)	<input type="checkbox"/> Expire	<input type="checkbox"/> Superseded By: _____

Comments: Administrative Correction FLS: _____
 Reviews documented on this PAR include the following forms:
 C SP 600.4-001 Rev. 000-00
 C SP 600.4-002 Rev. 000-00
 Change number of C OP 608 to C SP 600.4 and incorporate changes from CRs 03-08956 and 03-08654.

Associated A/Rs: 03005927, 03006129

Reviews	Print	Sign	Date	Department
<input type="checkbox"/>				
<input type="checkbox"/>				
<input type="checkbox"/>				
E-Plan-50.54(q)	<input checked="" type="checkbox"/>	T. RIGNEY	11/10/03	EPD
Writer's Guide	<input checked="" type="checkbox"/>	Debbie Couling	3/25/04	NP&RM
WC 9 Att 3 Req. <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	<input checked="" type="checkbox"/>	Chris Hollaway	12/15/03	NP&RM
Licensing Basis / RCD (50.59 Screen Req. <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No)	<input checked="" type="checkbox"/>	Chris Hollaway	3/16/04	NP&RM
Tech Independent	<input checked="" type="checkbox"/>	JAMES J Ackerman	12/11/03	OPS SUP


Validation (minimum of two)	<input type="checkbox"/> None	<input type="checkbox"/> Field - Use MP-05-DC-SAP01-004	<input type="checkbox"/> Simulated Performance - Use MP-05-DC-SAP01-004	<input checked="" type="checkbox"/> Table Top and Walk-through	<input type="checkbox"/> Comparison
	Print	Sign	Date	Dept	
Coordinator	E.P. Seacor	[Signature]	3-23-04	uzops	
Member	Mark Miner (U-3)	W.K. Wootery (U-2)			

Training: None Nuclear Training Briefing Familiarization

<input checked="" type="checkbox"/> SQR Review and Approval Approval <input checked="" type="checkbox"/> Disapproval <input type="checkbox"/> (1) SQR Sign/Date: 12/11/03 (2) Department Head Approval Sign: James R. C. [Signature]	<input type="checkbox"/> SORC Review and Approval N/A (1) Department Head Sign/Date (2) SORC Meeting Number (3) SORC Approval Sign	<input type="checkbox"/> Department Head Review and Approval N/A (1) Department Head Approval Sign
---	--	--


Approval Date: 3/25/04 Effective Date: 4/1/04

MILLSTONE POWER STATION
SURVEILLANCE PROCEDURE



**Communications – Radiopaging and ENRS
Practice and Weekly Operability Tests**

C SP 600.4
Rev. 000

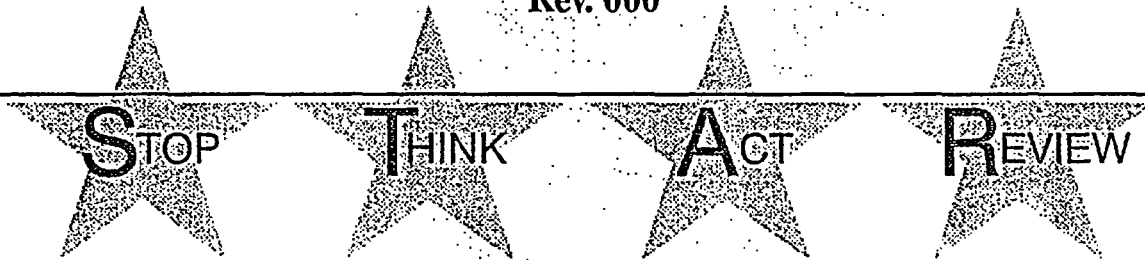

Approval Date: 3/25/04

Effective Date: 4/1/04

Level of Use
General

**Millstone All Units
Surveillance Procedure**

**Communications – Radiopaging and ENRS Practice and Weekly Operability
Tests**

TABLE OF CONTENTS

1.	PURPOSE	2
2.	PREREQUISITES	4
3.	PRECAUTIONS	5
4.	INSTRUCTIONS	6
4.1	Procedure Entry Point Determination	6
4.2	ENRS Practice Test	7
4.3	ENRS Weekly Operability Test – State and Local Officials	14
4.4	ENRS Test Failures	18
5.	REVIEW AND SIGNOFF	19
6.	REFERENCES	19
7.	SUMMARY OF CHANGES	19
	ATTACHMENTS AND FORMS	
	Attachment 1, “Drill Announcement Message for IRF Template”	21
	Attachment 2, “Switching Telephone Lines”	22
	C SP 600.4–001, “ENRS Practice Test Log”	
	C SP 600.4–002, “ENRS Weekly Operability Test”	

Level of Use
General



C SP 600.4
Rev. 000
1 of 23

1. PURPOSE

1.1 Objective

This procedure provides instructions for performing the practice and weekly tests to ensure the operability of the Emergency Notification and Response System (ENRS) and radiopager systems and to maintain satisfactory performance levels.

Performance of this procedure ensures these ENRS components are OPERABLE and can satisfy the requirements of 10CFR50 Appendix E.

1.2 Discussion

ENRS components (human and system) are tested to ensure operational readiness to notify State and Local Officials within the EPZ as well as SERO personnel in the event of an actual emergency.

There are two weekly tests. The first is performed by the Control Room on Wednesdays to test the Primary and Backup ENRS systems. This test sends messages to various state and local officials and a pager in the Control Room. If an emergency planning drill is being conducted on a Wednesday and State and Local Officials are participating, drill initiation via radiopager will satisfy the weekly requirement. The second is performed by Security on Tuesdays to test their ability to function as a backup to the Control Room in the event of an emergency. This test activates a test group of Emergency Planning staff radiopagers.

A copy of the completed weekly test form is sent to the Emergency Planning group for their review.

Each qualified Emergency Communicator will normally perform a practice test from their respective Control Room's ENRS system to maintain their proficiency every assigned working shift (e.g., if you are on day shift on Monday, Tuesday, and Wednesday, you would perform a practice test on each of those days during your shift). Personal performance of any of the following satisfies that individual's requirement for the practice test for that shift:

- Weekly radiopager test (State and Local Officials)
- Monthly radiopager test
- Drill messages
- Real events

Level of Use
General



C SP 600.4
Rev. 000
2 of 23

During plant outages and declared emergencies, only the designated Shift Emergency Communicator for the affected unit needs to perform the practice test. Any other qualified Emergency Communicators on shift for the affected unit do *not* have to perform the practice test. All qualified Emergency Communicators for the unaffected unit will still need to complete the practice test during their shift.

The ENRS practice test activates the control room console pager only and calls the control room ENRS phone. A monthly log is maintained in each Control Room for individuals to record completion of their practice test. A copy of the completed log is forwarded to the Emergency Planning group at the end of each month.

1.3 Applicability

This procedure is performed in all MODEs.

1.4 Frequency

1.4.1 Practice tests shall be performed by each qualified Emergency Communicator every working shift (day and night).

1.4.2 The ENRS weekly test schedule is as follows:

Weekly Test by Security			
Purpose: Test the ability of Security to act as a back-up to the control room staff in an emergency.			
Day	Location	Time	Notes
Every Tuesday	SAS	Approx. 0900	Activates a test group of EP staff radiopagers

Weekly Test by Control Rooms			
Purpose: Activates State and Local Official's pager and CR pager			
Day	Unit	Time	Notes
1st Wed Month	3	1000	Satisfied by monthly test if performed on Wednesday
2nd Wed Month	2	1000	Performed using RapidReach Backup system
3rd Wed Month	3	1000	N/A
4th Wed Month	2	1000	Performed using RapidReach Backup system
5th Wed. Month	3	1000	If applicable

Level of Use
General



2. PREREQUISITES

2.1 General

- 2.1.1 Unit SM or US has authorized practice testing for the entire month by signing and dating C SP 600.4-001
- 2.1.2 If performing weekly Control Room test, SM/US has authorized C SP 600.4-002.
- 2.1.3 Personnel performing this procedure are familiar with equipment operation.
- 2.1.4 Forms are maintained in the respective control rooms.
- 2.1.5 ENRS phone server is on-line (no red lights observed)
- 2.1.6 The affected/unaffected unit control room has been notified prior to performing the test on the ENRS terminal as only one ENRS operator may be on the system at a time.

2.2 Documents

- 2.2.1 MP-26-EPA-REF08B, "Millstone Emergency Plan Resource Book"

2.3 Definitions

- 2.3.1 EPD – Emergency Preparedness Department
- 2.3.2 MAXIMIZE – To restore
- 2.3.3 "RapidReach Overview" screen – Allows visual observation of past or present callout status.
- 2.3.4 "EasyView" screen – Provides a graphical presentation of the status of the current callout.

Level of Use
General



C SP 600.4
Rev. 000
4 of 23

3. PRECAUTIONS

- 3.1 Failure to select the correct scenario may result in unwarranted activation or the release of misinformation.
- 3.2 An actual event takes precedence over testing. The weekly test shall be postponed until after the release or termination of the real event.
- 3.3 No system maintenance or activities are to be performed concurrent with testing performed by this procedure.
- 3.4 If using "RapidReach Primary," "EasyView Primary" must also be used and vice versa.
- 3.5 If at any time, a system error occurs or communication is lost with the primary server, and a call-out has started, the red traffic light in "EasyView" should be selected to stop the call-out.

Level of Use
General



C SP 600.4
Rev. 000
5 of 23

4. INSTRUCTIONS

4.1 Procedure Entry Point Determination

4.1.1 IF performing ENRS shiftly practice test, Go To Section 4.2.

4.1.2 IF performing ENRS weekly test, Go To Section 4.3.

- End of Section 4.1 -

Level of Use
General



C SP 600.4
Rev. 000
6 of 23

4.2 ENRS Practice Test

NOTE

1. If any of the following is experienced, the ENRS should be immediately assessed for operability or function with respect to 10CFR50.72 criteria:
 - A system error occurs
 - Communication is lost with the primary server
2. It is the intent of the station that appropriate personnel are immediately called in to assess the operability or function of the ENRS and are available to assist the ENRS Operator with preparations should notification of a communications failure be required using an alternate means.

4.2.1 IF at any time, one of the following occurs, AND a call-out has started, SELECT the red traffic light in “EasyView” to stop the call-out and Go To Section 4.4:

- A system error occurs
- Communication is lost with the primary server

4.2.2 IF it is desired to perform practice test using backup systems, PERFORM the following:

- Refer To Attachment 2 and TRANSFER telephone lines.
- PERFORM test using “RapidReach Backup” and “EasyView Backup.”

4.2.3 PERFORM ENRS log-on as needed.

4.2.4 OPEN “RapidReach Primary” or “RapidReach Backup” folder, as applicable, and “RapidReach” icon.

4.2.5 At “RapidReach Login” screen, SELECT user ID and ENTER password.

4.2.6 OPEN “EasyView” icon.

4.2.7 At “EasyView Login” screen, SELECT user ID and ENTER password.

Level of Use
General



C SP 600.4
Rev. 000
7 of 23

4.2.8 ENTER IRF data, as follows:

- a. OPEN "IRF" form.

NOTE

Practice Test IRFs are *not* assigned IRF numbers.

- b. To prevent IRF number assignment, SELECT "CANCEL" and then "OK."
- c. Refer To Attachment 1 and ENTER event information into IRF template.
- d. PRINT IRF form to local printer.
- e. COMPARE with Attachment 1 and VERIFY information is correct.

4.2.9 SAVE IRF image file as follows:

- a. SELECT "File" and "Print."

NOTE

Saving the IRF form to "Print-2-Image" attaches the fax to the radiopager message.

- b. SELECT "Print-2-Image," and SELECT "OK."
- c. At the "Selection Configuration" box, SELECT appropriate setup.
- d. At the "Select Message to Fax" screen, SELECT "Root" tree.
- e. At the "Root" tree, SELECT "Test Call-Outs" folder, "Weekly Pager Test-No Response Required"
- f. SELECT "OK."

Level of Use
General



C SP 600.4
Rev. 000
8 of 23

4.2.10 TRANSMIT radiopager practice test message, as follows:

- a. MAXIMIZE “RapidReach” screen.
- b. SELECT “microphone” icon (“Show Message Window”).
- c. At “Root” tree, SELECT “Test Call-Outs” folder, and “Weekly Pager Test – No Response Required.”
- d. To hear the “Alpha Pager Message,” SELECT “Play,” and VERIFY information is correct.



CAUTION



It is important that the scenario chosen for the practice test *does not* page State and Local Officials. The “Radiopager Practice Test” scenario shall be used.

- e. MAXIMIZE “EasyView” screen and SELECT appropriate “Practice Test” scenario from the following:
 - Unit 3 Practice Test
 - Unit 2 Practice Test
 - EOF Practice Test
- f. SELECT “lightning bolt” icon.
- g. SELECT “Set Common Message.”

Level of Use
General




C SP 600.4
Rev. 000
9 of 23


NOTE

For purposes of the practice test, the “Weekly Pager Test – No Response Required” message is used.

- h. At “Root” tree, SELECT “Test Call–Outs” folder, and “Weekly Pager Test – No Response Required.”
- i. SELECT “OK.”



CAUTION



The scenario and message must be read and verified before selecting the start button. If the correct scenario is *not* selected, an unwarranted activation *or* the release of misinformation may occur.

- j. STOP and VERIFY scenario and message are accurate.
- k. At “Start of Scenario” screen, SELECT “Start.”

Level of Use
General



C SP 600.4
Rev. 000
10 of 23

NOTE

Normally after starting a scenario message, the IRF data is recorded. However, due to the configuration of the practice test scenario, the IRF data is recorded after responding to the phone call and pager message due to the timing involved.

4.2.11 CHECK ENRS functions as follows:

- CHECK ENRS call-out system as follows:
 - 1) WHEN ENRS system calls ENRS phone, ENTER responses to system prompts.
 - 2) MONITOR "RapidReach Overview" screen and CHECK position is accepted.
- CHECK radiopager system as follows:
 - 1) MONITOR "RapidReach Overview" screen and CHECK that page has been sent to appropriate pager (i.e. Control Room or EOF).

NOTE

There is a short delay between the sending of the paging message and the activation of the pager which should *not* exceed five minutes. Any delay over five minutes should be reported to Telecommunications.

- 2) CHECK that pager activates.
 - 3) WHEN pager activates, ACKNOWLEDGE page by calling into ENRS using designated call-in number and ENTER responses to system prompts.
 - 4) MONITOR "RapidReach Overview" screen and CHECK ENRS acknowledges radiopager call-in.
- CHECK fax is received at appropriate location (i.e. Control Room or EOF).

Level of Use
General



C SP 600.4
Rev. 000
11 of 23

4.2.12 RECORD IRF data, as follows:

- a. MAXIMIZE "RapidReach" screen.
- b. SELECT "microphone" icon ("Show Message Window").
- c. At "Root" tree, SELECT "Informational Message."
- d. At "Audio Message" screen, SELECT "microphone" icon.
- e. To record entire IRF, SELECT "Rec" and WHEN finished, SELECT "Stop."
- f. To verify recorded information is satisfactory, SELECT "Play" and LISTEN to the message.
- g. WHEN message is verified, SELECT "OK."

4.2.13 At "EasyView " screen, SELECT red traffic light to deactivate call-out.

4.2.14 RESTORE general default, as follows:

- a. SELECT "Rapid Reach."
- b. SELECT "microphone" icon ("Show Message Window").
- c. At "Root" tree, SELECT "Informational Message."
- d. At "Audio Message" screen, SELECT "microphone" icon.
- e. RECORD the following:

"THERE IS NO INFORMATION PRESENTLY AVAILABLE AT MILLSTONE STATION."
- f. VERIFY recorded information is satisfactory and SELECT "OK."

- g. From "Root" tree, SELECT "Test Call-Outs" folder and "Weekly Pager Test—No Response Required."
 - h. SELECT red minus button in fax box on lower right of screen.
 - i. SELECT "Yes" to delete, and OBSERVE "Same as alpha pager" in fax message box.
- 4.2.15 ENSURE all call-outs have been deactivated.
- 4.2.16 CLOSE the following:
- "RapidReach"
 - "EasyView"
 - "IRF" word document
- 4.2.17 PERFORM ENRS log-off.

NOTE

If the ENRS phone server is on the secondary system, green lights will be illuminated on the telephone.

- 4.2.18 IF telephone lines are on the secondary server system, Refer To Attachment 2 and RESTORE telephone lines to Primary.
- 4.2.19 Refer To C SP 600.4-001 and COMPLETE ENRS practice test log entry.
- 4.2.20 IF acceptance criteria listed on C SP 600.4-001 are *not* met, PERFORM the following:
- a. NOTIFY affected unit SM/US of system problem.
 - b. Go To Section 4.4.

— End of Section 4.2 —

Level of Use
General



C SP 600.4
Rev. 000
13 of 23

4.3 ENRS Weekly Operability Test – State and Local Officials

NOTE

1. If any of the following is experienced, the ENRS should be immediately assessed for operability or function with respect to 10CFR50.72 criteria:
 - A system error occurs
 - Communication is lost with the primary server
2. It is the intent of the station that appropriate personnel are immediately called in to assess the operability or function of the ENRS and are available to assist the ENRS Operator with preparations should notification of a communications failure be required using an alternate means.
3. If the ENRS Operator is unable to easily perform a routine test from the applicable control room on the scheduled day, due to concurrent control room activities, the test may be performed from an alternate location with Emergency Preparedness concurrence.

4.3.1 IF at any time, one of the following occurs, AND a call-out has started, SELECT the red traffic light in “EasyView” to stop the call-out and Go To Section 4.4:

- A system error occurs
- Communication is lost with the primary server

NOTE

The weekly tests on the 2nd and 4th Wednesday of the month are performed using the secondary system. However, if the secondary test fails, an test using the primary system is attempted.

4.3.2 IF the 2nd or 4th Wednesday of the month AND a test using the secondary system has *not* been attempted, PERFORM the following:

- Refer To Attachment 2 and TRANSFER telephone lines to secondary server.
- PERFORM test using “RapidReach Backup” and “EasyView Backup.”

4.3.3 PERFORM ENRS log-on as needed.

Level of Use
General



C SP 600.4
Rev. 000
14 of 23

- 4.3.4 OPEN "RapidReach Primary" or "RapidReach Backup" folder, as applicable, and "RapidReach" icon.
- 4.3.5 At "RapidReach Login" screen, SELECT user ID and ENTER password.
- 4.3.6 OPEN "EasyView" icon.
- 4.3.7 At "EasyView Login" screen, SELECT user ID and ENTER password.
- 4.3.8 TRANSMIT weekly radiopager test message, as follows:
 - a. MAXIMIZE "RapidReach" screen.
 - b. At "Root" tree, SELECT "Test Call-Outs" folder, and "Weekly Pager Test - No Response Required."
 - c. To hear the "Alpha Pager Message," SELECT "Play," and VERIFY information is correct (message may be recorded again, if necessary).
 - d. MAXIMIZE "EasyView" screen and SELECT "ENRS Weekly Op. Test - S&L Officials" scenario.
 - e. SELECT "lightning bolt" icon.
 - f. SELECT "Set Common Message."
 - g. At "Root" tree, SELECT "Test Call-Outs" folder, and "Weekly Pager Test - No Response Required."
 - h. SELECT "OK."



▼ CAUTION ▼

The scenario and message must be read and verified before selecting the start button. If the correct scenario is *not* selected, an unwarranted activation *or* the release of misinformation may occur.

- i. STOP and VERIFY scenario and message are accurate.
 - Quick start scenario matches test scenario (top right-hand corner).
 - Call-out list matches scenario chosen.
- j. At "Start of Scenario" screen, SELECT "Start."

4.3.9 CHECK ENRS functions as follows:

- CHECK radiopager system as follows:
 - 1) MONITOR "RapidReach Overview" screen to check that control room console page has been sent and INITIAL "Sat" or "Unsat" on C SP 600.4-002.

NOTE

There is a short delay between the sending of the paging message and the activation of the pager which should *not* exceed five minutes. Any delay over five minutes should be reported to Telecommunications.

- 2) CHECK that the control room console pager activates and INITIAL "Sat" or "Unsat" on C SP 600.4-002.
- 3) WHEN pager activates, ACKNOWLEDGE page by calling into ENRS using designated call-in number and ENTER responses to system prompts.
- 4) CHECK ENRS acknowledges radiopager call-in and INITIAL "Sat" or "Unsat" on C SP 600.4-002.
- CHECK fax is received in respective control room and INITIAL "Sat" or "Unsat" on C SP 600.4-002.

Level of Use
General



C SP 600.4
Rev. 000
16 of 23

- 4.3.10 At "EasyView" screen, SELECT the red traffic light to deactivate call-out.
- 4.3.11 ENSURE all call-outs have been deactivated.
- 4.3.12 CLOSE the following:
- "RapidReach"
 - "EasyView"
- 4.3.13 PERFORM ENRS log-off.

NOTE

If the ENRS phone server is on the secondary system, green lights will be illuminated on the telephone.

- 4.3.14 IF telephone lines are on the secondary server system, Refer To Attachment 2 and RESTORE telephone lines to Primary.
- 4.3.15 COMPLETE C SP 600.4-002.
- 4.3.16 IF acceptance criteria listed on C SP 600.4-002 are *not* met, PERFORM the following:
- a. NOTIFY affected unit SM/US of system problem.
 - b. Go To Section 4.4.

- End of Section 4.3 -

Level of Use
General



C SP 600.4
Rev. 000
17 of 23

4.4 ENRS Test Failures

- 4.4.1 NOTIFY EPD of system status.
- 4.4.2 IF directed to perform test using alternate system, **PERFORM** the following:
- Refer to Attachment 2 and TRANSFER telephone lines.
 - Go To appropriate Section and **PERFORM** test using the opposite server.
- 4.4.3 IF performing the weekly test AND both the primary AND secondary systems fail, **REQUEST** Security (SAS) (Ext. 4851) send the following message to State and Local Officials using the NUWAPS terminal:
- “THIS IS THE MP WEEKLY PAGER TEST. NO RESPONSE REQUIRED.”
- 4.4.4 **PERFORM** the following, as applicable.
- **INITIATE** Corrective Actions.
 - IF hardware or software related problem, Refer To MP-26-EPA-REF08B, “Millstone Emergency Plan Resource Book,” and **NOTIFY** Information Technology personnel.
 - IF telephone line problems are detected or reported, Refer To MP-26-EPA-REF08B, “Millstone Emergency Plan Resource Book,” and **NOTIFY** Telecommunications personnel.
- 4.4.5 WHEN the ENRS has been repaired, **RESTORE** telephone lines to the primary system, as necessary.

– End of Section 4.4 –

Level of Use
General



C SP 600.4
Rev. 000
18 of 23

5. REVIEW AND SIGNOFF

5.1 The review and signoff for this procedure is contained in the following:

- C SP 600.4-001, "ENRS Practice Test Log"
- C SP 600.4-002, "ENRS Weekly Operability Test"

6. REFERENCES

6.1 Developmental Documents

- 6.1.1 10CFR50, Appendix E, "Emergency Planning and Preparedness for Production and Utilization Facilities"
- 6.1.2 MP-26-EPA-FAP01, "Management Program for Maintaining Emergency Preparedness"

6.2 Procedures

- 6.2.1 MP-26-EPA-REF08B, "Millstone Emergency Plan Resource Book"

7. SUMMARY OF CHANGES

- 7.1 This procedure was re-numbered from C OP 608.
- 7.2 Added guidance from Emergency Planning that during certain conditions, only the on-shift emergency communicator has to perform the practice test.
- 7.3 Converted attachments which documented performance of shiftly and weekly tests to new forms for record transmittal and retention practices.
- 7.4 Modified description of weekly Security test to state that it activates a test group of EP staff radiopagers. This was changed when the SERO staff went to an "All-Call" system and no longer needed the weekly message to transfer duties to the next team. The group was changed so that the SERO staff was not receiving two test messages each week (Ref. CR 03-08956, AR 03006129).
- 7.5 Eliminated steps in Weekly test Section to complete IRF form and during restoration to delete fax file. This test does not create an IRF or a fax file like the practice tests and the monthly tests (Ref. CR 03-08654, AR 03005927).

Level of Use
General



C SP 600.4
Rev. 000
19 of 23

- 7.6 Deleted steps in Section 4.5 for sending copies of form to EPD and originals to Nuclear Records. These steps are performed by administrative personnel after review and approval of the completed surveillance.
- 7.7 Deleted Note item from Section 4.2 which allowed ENRS practice tests to be performed at alternate locations if it could not be easily performed at Unit 3. This is no longer applicable as Emergency Communicators are stationed at both Units 2 and 3 instead of having the one Shift Technician to cover both units.
- 7.8 Deleted "Scenario Chart" Attachment as it was not referenced or used in this procedure.
- 7.9 Modified flowpath of function checks during practice tests to account for ENRS response during the practice test. Specifically, the IRF data is recorded after the function checks are completed as they occur very quickly after the message is sent.
- 7.10 Incorporate Restoration Section (old C OP 608 Section 4.5) actions into test Sections.
- 7.11 Modified ENRS failures section to address failure modes and issues.

Level of Use
General



C SP 600.4
Rev. 000
20 of 23

Attachment 2
Switching Telephone Lines
(Sheet 1 of 2)

NOTE

If the ENRS primary phone server is down, a communication failure has occurred. Telephone lines will need to be switched to the secondary phone server.

1. **IF** primary system is down, **PERFORM** the following:
 - 1.1 LIFT the dedicated ENRS handset.
 - 1.2 PRESS position "g" (blue button) labelled "Press for SERO Transfer."
 - 1.3 DIAL "2724."
 - 1.4 WAIT for confirmation tone (3 beeps).
2. **IF** confirmation tone is *not* heard, Go To step 1.

NOTE

The light will stay on to indicate the successful transfer of telephone lines.

3. HANG up handset and OBSERVE light on position "g" (blue button) illuminates, indicating transfer of SERO telephone lines.
4. LIFT the dedicated ENRS handset again.
5. PRESS position "i" (red button) labelled "Press for Transfer of State/Local to Back up."
6. OBSERVE the following:
 - 6.1 Light on position "i" (red button) will illuminate for a few seconds and then turn off.
 - 6.2 Light on position "h" (yellow button) labelled "Light "ON" State/Local on Back up" will illuminate and stay on, indicating transfer of State/Local lines.
7. HANG up handset.
8. **IF** either **OR** both lights fail to illuminate, Go To step 5.

Level of Use
General



C SP 600.4
Rev. 000
22 of 23

Attachment 2
Switching Telephone Lines
(Sheet 2 of 2)

NOTE

If the ENRS phone server is on the secondary system, green lights will be illuminated on the telephone.

9. RESTORE phone server from secondary to primary, as follows:

- 9.1 PRESS position "g" (blue button) labelled "Press for SERO Transfer."
- 9.2 OBSERVE light on position "g" (blue button) is *not* lit, indicating transfer of SERO lines.

10. RESTORE State/Local line to primary server, as follows:

- 10.1 LIFT the dedicated ENRS handset.
- 10.2 PRESS position "j" (green button) labelled "Press to Restore State/Local to Primary," and OBSERVE the following:
 - 10.2.1 Light on position "j" (green button) labelled "Press to Restore State/Local to Primary," is lit.

NOTE

Lights on position "h" and position "j" will go out after illumination.

- 10.2.2 Light on position "h" (yellow button) labelled "Light "ON" State/Local on Back up," is *not* lit.
- 10.2.3 Light on position "j" (green button) labelled "Press to Restore State/Local to Primary," is *not* lit.

10.3 HANG UP the dedicated ENRS handset.

Level of Use
General



C SP 600.4
Rev. 000
23 of 23