

b. Any Westinghouse mechanical hybrid expansion joint (HEJ) sleeve which, upon inspection, exhibits wall degradation of 31% or more shall be plugged prior to returning the steam generator to service. Figure TS 4.2-1 illustrates the application of tube, sleeve, and tube/sleeve joint repair limit criteria. For disposition of parent tube indications, the following requirements apply. The dimensions specified do not include eddy current uncertainty.

1. Hybrid expansion joint sleeved tubes with circumferential indications located from 1.1 inches to 1.3 inches below the bottom of the hardroll upper transition may remain in service provided the faulted loop steam line break (SLB) leakage limit from all sources is not exceeded. A SLB leakage limit of 0.033 gpm shall be assumed for each indication regardless of length or depth.

2. Hybrid expansion joint sleeved tubes with circumferential and/or axial indications whose upper most extent is located > 1.3 inches below the bottom of the hardroll upper transition may remain in service.

3. Hybrid expansion joint sleeved tubes with axial indications whose upper most extent is located  $\leq$  1.3 inches below the bottom of the hardroll upper transition shall be plugged.

c. Any Combustion Engineering leak tight sleeve which, upon inspection, exhibits wall degradation of 40% or more shall be plugged prior to returning the steam generator to service. This plugging limit applies to the sleeve up to and including the weld region.

#### 5. Tube Support Plate Voltage-Based Plugging Criteria<sup>(3)</sup>

The following criteria are used for the disposition of a steam generator tube for continued service that is experiencing outside diameter stress corrosion cracking confined within the thickness of the tube support plates. At tube support plate intersection, the repair limit is based on maintaining steam generator tube serviceability as described below:

a. Degradation attributed to outside diameter stress corrosion cracking within the bounds of the tube support plate with bobbin voltage  $\leq$  2.0 volts will be allowed to remain in service.

---

<sup>(3)</sup>The tube support plate voltage-based repair criteria is applicable for the 1995 to 1996 operating cycle only.

- b. Degradation attributed to outside diameter stress corrosion cracking within the bounds of the tube support plate with a bobbin voltage > 2.0 volts will be repaired or plugged except as noted in TS 4.2.b.5.c below.
- c. Indications of potential degradation attributed to outside diameter stress corrosion cracking within the bounds of the tube support plate with a bobbin voltage > 2.0 volts but ≤ 5.6 volts may remain in service if a rotating pancake coil inspection does not detect degradation. Indications of outside diameter stress corrosion cracking degradation with a bobbin voltage > 5.6 volts will be plugged or repaired.
- d. If, as a result of leakage due to a mechanism other than ODSCC at the tube support plate intersection or some other cause, an unscheduled mid-cycle inspection is performed, the following repair criteria apply instead of TS 4.2.b.5.c. If bobbin voltage is within expected limits, the indication can remain in service. The expected bobbin voltage limits are determined from the following equation:

$$V \leq \frac{\frac{\Delta t}{CL}(V_{SL} - V_{BOC}) + V_{BOC}}{1 + (.2) \left( \frac{\Delta t}{CL} \right)}$$

Where:

- V = measured voltage
- V<sub>BOC</sub> = voltage at BOC
- Δt = time period of operation to unscheduled outage
- CL = cycle length (full operating cycle length where operating cycle is the time between two scheduled steam generator inspections)
- V<sub>SL</sub> = 9.6 volt for 7/8 inch tubes

## 6. Reports

- a. Following each in-service inspection of steam generator tubes, if there are any tubes requiring plugging or repairing, the number of tubes plugged or repaired shall be reported to the Commission within 30 days.

- b. The results of the steam generator tube in-service inspection shall be included in the Annual Operating Report for the period in which this inspection was completed. This report shall include:
  - 1. Number and extent of tubes inspected.
  - 2. Location and percent of wall-thickness penetration for each indication of a degradation.
  - 3. Identification of tubes plugged.
  - 4. Identification of tubes repaired.
- c. Results of a steam generator tube inspection which fall into Category C-3 require prompt (within 4 hours) notification of the Commission consistent with 10 CFR 50.72(b)(2)(i). A written follow up report shall be submitted to the Commission consistent with Specification 4.2.b.6.a, using the Licensee Event Report System to satisfy the intent of 10 CFR 50.73(a)(2)(ii).
- d. For implementation of the voltage-based repair criteria to tube support plate intersections, notify the NRC staff prior to returning the steam generators to service should any of the following conditions arise:
  - 1. If estimated leakage based on the actual measured end-of-cycle voltage distribution would have exceeded the leak limit (for the postulated main steam line break utilizing licensing basis assumptions) during the previous operating cycle.
  - 2. If circumferential crack-like indications are detected at the tube support plate intersections.
  - 3. If indications are identified that extend beyond the confines the tube support plate.
  - 4. If the calculated conditional burst probability exceeds the threshold value, notify the NRC and provide an assessment of the safety significance of the occurrence.

#### Technical Specification 4.2.b.4

Steam generator tubes found with less than the minimum wall thickness criteria determined by analysis, as described in WCAP-7832<sup>(1)(2)</sup>, must either be repaired to be kept in service or removed from service by plugging.

Steam generator tube plugging is a common method of preventing primary-to-secondary steam generator tube leakage and has been utilized since the inception of PWR nuclear reactor plants. This method is relatively uncomplicated from a structural/mechanical standpoint as flow is cut off from the affected tube by plugging it in the hot and cold leg faces of the tubesheet.

To determine the basis for the sleeve plugging limit, the minimum sleeve wall thickness was calculated in accordance with Draft Regulatory Guide 1.121 (August 1976).

For the Westinghouse mechanical sleeves, the sleeve plugging limit of 31% is applied to the sleeve as shown on Figure TS 4.2-1. For the Combustion Engineering leak tight sleeves, a plugging limit of 40% is applied to the sleeve and weld region. The sleeve plugging limits allow for eddy current testing inaccuracies and continued operational degradation per Draft Regulatory Guide 1.121 (August 1976).

Repair by sleeving, or other methods, has been recognized as a viable alternative for isolating unacceptable tube degradation and preventing tube leakage. Sleeving isolates unacceptable degradation and extends the service life of the tube, and the steam generator. Tube repair, by sleeving in accordance with WCAP-11643<sup>(3)</sup> and CEN-413-P<sup>(4)</sup> has been evaluated and analyzed as acceptable. The Westinghouse mechanical hybrid expansion joint (HEJ) sleeve spans the degraded area of the parent tube in the tubesheet region. The sleeves are either 36", 30" or 27" to allow access permitted by channel head bowl geometry. The sleeve is hydraulically expanded and hard rolled into the parent tubing.

---

<sup>(1)</sup>WCAP 7832, "Evaluation of Steam Generator Tube, Tube Sheet, and Divider Plate Under Combined LOCA Plus SSE Conditions."

<sup>(2)</sup>E. W. James, WPSC, to A. Schwencer, NRC, dated September 6, 1977.

<sup>(3)</sup>WCAP 11643, Kewaunee Steam Generator Sleeving Report, Revision 1, November 1988 (Proprietary).

<sup>(4)</sup>CEN-413-P, "Kewaunee Steam Generator Tube Repair Using Leak Tight Sleeves," January 1992 (Proprietary).

The pressure boundary for HEJ sleeves is shown on Figure TS 4.2-1. The pressure boundary used to disposition parent tube indications detected in the upper joint of the HEJ sleeved tubes is outlined in WCAP-14446<sup>(5)</sup>. The pressure boundary maintains structural integrity consistent with Draft Regulatory Guide 1.121 (August 1976). Application of the pressure boundary for repair of HEJ sleeved tubes provides allowance for leakage in a faulted loop during a postulated steam line break (SLB) event. A SLB leakage of 0.033 gpm is assumed for each applicable indication. Steam line break leakage from all sources must be calculated to be < 34 gpm in the faulted loop. Maintenance of the 34 gpm limit ensures off-site doses will remain within a small fraction of the 10 CFR Part 100 guidelines for a SLB.

There are three types of Combustion Engineering leak tight sleeves. The first type, the straight tubesheet sleeve, spans the degraded area of the parent tube in the tubesheet crevice region. The sleeve is welded to the parent tube near each end. The second type of sleeve is the peripheral tubesheet sleeve. The sleeve is initially curved as part of the manufacturing process and straightened as part of the installation process. The third type of sleeve, the tube support plate sleeve, spans the degraded area of the tube support plate and is installed up to the sixth support plate. This sleeve is welded to the parent tube near each end of the sleeve.

The hydraulic equivalency ratios for the application of normal operating, upset, and accident condition bounding analyses have been evaluated. Design, installation, testing, and inspection of steam generator tube sleeves requires substantially more engineering than plugging, as the tube remains in service. Because of this, the NRC has defined steam generator tube repair to be an Unreviewed Safety Question as described in 10 CFR 50.59(a)(2). As such, other tube repair methods will be submitted under 10 CFR 50.90; and in accordance with 10 CFR 50.91 and 92, the Commission will review the method, issue a significant hazards determination, and amend the facility license accordingly. A 90-day time frame for NRC review and approval is expected.

#### Technical Specification 4.2.b.5<sup>(6)</sup>

The repair limit of tubes with degradation attributable to outside diameter stress corrosion cracking contained within the thickness of the tube support plates is conservatively based on the analysis documented in WCAP-12985, "Kewaunee Steam Generator Tube Plugging Criteria for ODSCC at Tube Support Plates" and EPRI Draft Report TR-100407, Rev.1, "PWR Steam Generator Tube Repair Limits - Technical Support Document for Outside Diameter Stress Corrosion Cracking at Tube Support Plates." Application of these criteria is based on limiting primary-to-secondary leakage during a steam line break to ensure the applicable 10 CFR Part 100 limits are not exceeded.


---

<sup>(5)</sup> WCAP-14446, "Repair Boundary for Parent Tube Indications Within the Upper Joint Zone of Hybrid Expansion Joint (HEJ) Sleeved Tubes"

<sup>(6)</sup> The tube support plate voltage-based repair criteria is applicable for the 1995 to 1996 operating cycle only.

Technical Specification 4.2.b.6

Category C-3 inspection results are considered abnormal degradation to a principal safety barrier and are therefore reportable under 10 CFR 50.72(b)(2)(i) and 10 CFR 50.73(a)(2)(ii).

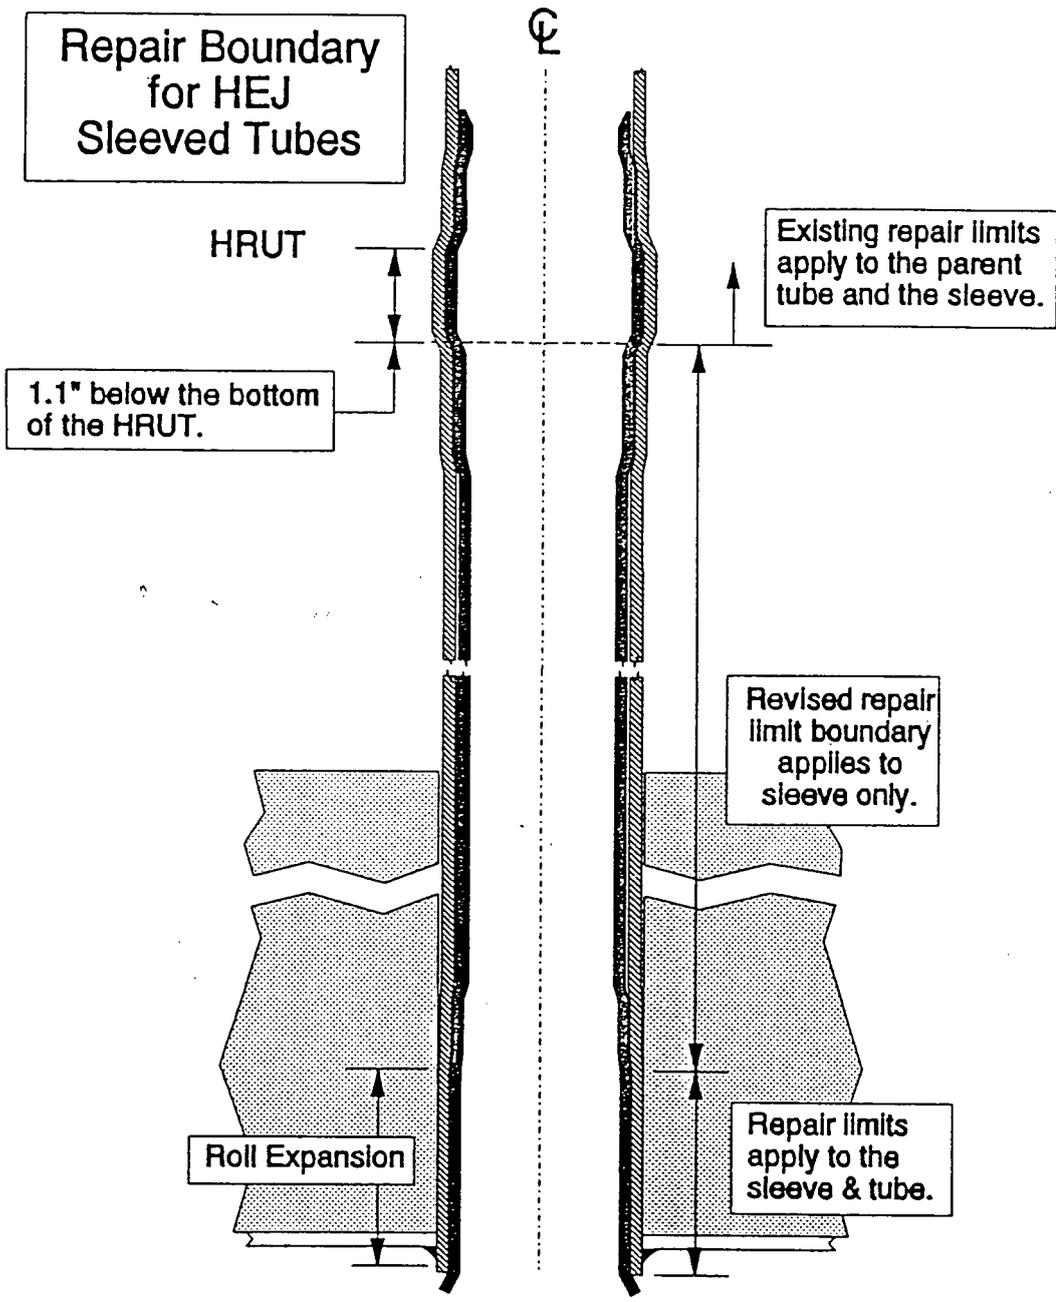

Application of Plugging Limit for a Westinghouse Mechanical Sleeve

Figure TS 4.2-1