POWER RESOURCES

Smith Ranch - Highland Uranium Project
P. O. Box 1210
Glenrock, Wyoming USA 82637
Casper: 307-235-1628
Douglas: 307-358-6541
Fax: 307-358-4533

February 21, 2007

Mr. Paul Michalak
U. S. Nuclear Regulatory Commission
Fuel Cycle Licensing Branch, NMSS
Two White Flint North
11545 Rockville Pike, T7E18
Rockville, MD 20852-2738

RE: SOUTHWEST AREA HYDROLOGIC TEST
NRC LICENSE SUA-1548, DOCKET NO. 40-8964

Dear Paul,

Power Resources, Inc. (PRI) is herein submitting a pump test as required by Source Material License SUA-1548, Section 10.1.10 as follows: "*The licensee is prohibited from conducting well-field installation in the southwestern part of the State of Wyoming permit area, T35N R74W, excluding Section 2, until aquifer characteristics have been tested, reviewed, and approved by NRC*". This plan will also be presented to the Wyoming Department of Environmental Quality, Land Quality Division (WDEQ/LQD) to comply with Permit to Mine # 633.

The purpose of the Southwest Area pump test is to determine the general hydrologic characteristics of the production zone and to demonstrate communication within the production aquifer. The test will assess the presence of general hydrologic boundaries within the production zone and potential communication with overlying and underlying aquifers.

PRI would greatly appreciate expedient review and approval of the submitted pump test. If you have any questions regarding this report, please contact me at (307) 358-6541, ext. 46.

Sincerely,

John McCarthy
Manager, Safety, Health and Environmental Affairs

Enclosure
Cc: C. Foldenauer w atta.
Steve Ingle WDEQ
S.P. Collings w atta.
G. Kruse
File: SR4.6.4.1
EHS

POWER RESOURCES, INC.
SMITH RANCH-HIGHLAND URANIUM OPERATIONS

SOUTHWEST AREA REGIONAL HYDROLOGIC TEST

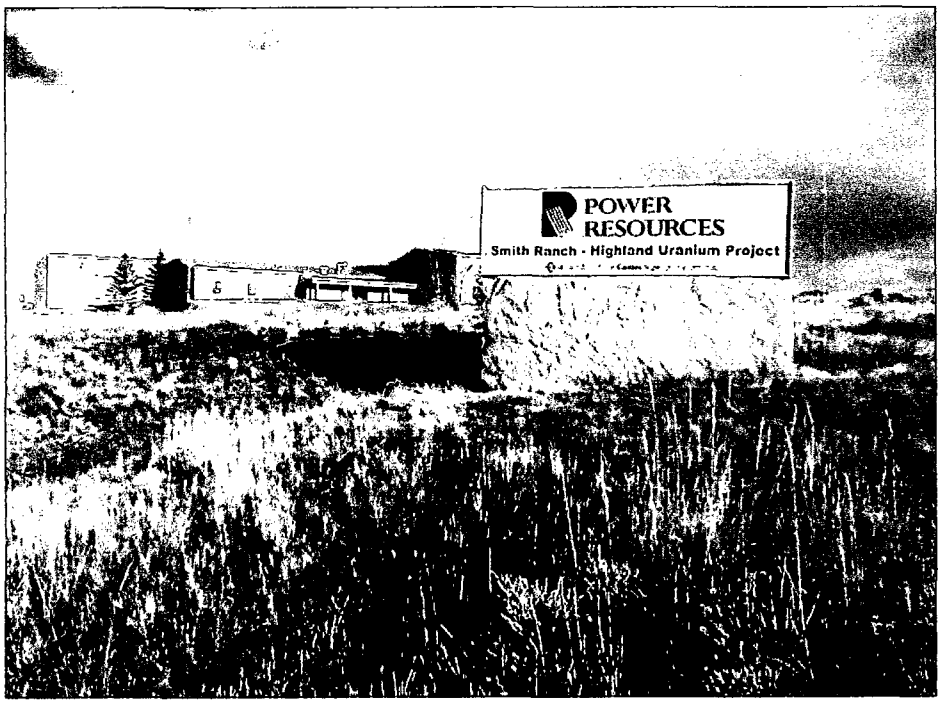

February 2007

NRC License No. SUA-1548
WDEQ/LQD PERMIT NO. 633

2/21/07

Greg W. Kruse, P.G.
Geologist

POWER RESOURCES

TABLE OF CONTENTS

Professional Certification
Executive Summary

1.0 INTRODUCTION 1
1.1 Background 1
1.2 Regulatory Requirements 1
1.3 Purpose and Objectives 2
1.4 Report Organization 3

2.0 SITE-SPECIFIC HYDROGEOLOGIC CONDITIONS 4
2.1 Overlying Units: L Shale Confining Unit and M Sand 4
2.2 Production Zone: K Sand 5
2.3 Underlying Units: J Shale Confining Unit and I Sandstone 5
2.4 Potentiometric Surface: K Sand 6

3.0 MONITOR WELL SPACING AND COMPLETION 7
3.1 Well Spacing 7
3.2 Well Installation and Completion 7
3.3 Abandonment of Existing Wells 8

4.0 PUMP TEST DESIGN AND PROCEDURES 9
4.1 Test Design 9
4.2 Equipment Layout 10
4.3 Background Monitoring, Test Procedures and Data Collection 11

5.0 ANALYTICAL METHODS AND TEST RESULTS – PRODUCTION ZONE 13
5.1 Analytical Methods 13
5.2 Background Trends 13
5.3 Test Results 14
5.3.1 Drawdown 14
5.3.2 Analytical Results 14
5.4 Directional Permeability 15

6.0 TEST RESULTS - CONFINING UNITS 16
6.1 Historical Laboratory and Field Results 16
6.2 Southwest Area Results: Overlying Unit 17
6.3 Southwest Area Results: Underlying Unit 18
6.4 Integrity of Confining Units 18

7.0 SUMMARY AND CONCLUSIONS 19

8.0 REFERENCES 21

LIST OF TABLES

Table

3-1 Well Information: Southwest Area
4-1 Pumping and Monitor Wells
4-2 Equipment Layout
4-3 Flowrate vs. Time – Test 1 (SWPW-2)
4-4 Flowrate vs. Time – Test 2 (SWPW-1)
5-1 Summary of Pump Test Results
5-2 Summary of Transmissivity Results

LIST OF FIGURES

Figure

1-1 Project Location Map
1-2 Wellfield Layout, Historic wells, Monitoring Wells, and Wellfield Outline
2-1 Isopach Map: Overlying M Sand
2-2 Isopach Map: L Shale Confining Unit
2-3 Isopach Map: K Production Sand
2-4 Isopach Map: J Shale Confining Unit
2-5 Isopach Map: Underlying I Sandstone
2-6 Cross-section Index: Southwest Area
2-7 Cross-section B-B'
2-8 Cross-section B'-B"
2-9 Cross-section A-A'
2-10 Cross-section 1-1'
2-11 Cross-section 2-2'
4-1 Initial Potentiometric Surface Map: Production Zone Wells (09/07/06)
4-2 Background Water Levels - K Sand (Production Zone) Wells
4-3 Background Water Levels - M Sand (Overlying Aquifer) Wells
4-4 Background Water Levels - I Sandstone (Underlying Aquifer) Wells
5-1 Elevation vs. Barometric Pressure in SWMP (Production Zone) Wells - Background through Recovery
5-2 Elevation vs. Barometric Pressure in SWPW (Production Zone) Wells - Background through Recovery
5-3 Potentiometric Surface Map: End of Test 1 (SWPW-2) Production Zone Wells (09/15/06)
5-4 Drawdown vs. Pumping Time, SWPW-2 and SWPW-1
5-5 Example Theis Type Curve Match: SWMP-3 during SWPW-2 Test
5-6 Drawdown in Production Zone Wells at End of Pumping Tests 1 and 2
5-7 Potentiometric Surface Map: End of Test 2 (SWPW-1) Production Zone Wells (10/06/06)
5-8 Southwest Area Transmissivity Map

LIST OF FIGURES (cont'd)

Figure

6-1 Depth to Water vs. Barometric Pressure in SWMO (Overlying) Wells - Background through Recovery
6-2 Depth to Water vs. Barometric Pressure in SWMU (Underlying) Wells – Background through Recovery.

APPENDICIES

Appendix

A	Geologic Logs
B	Well Completion Reports
C	Type Curve Matches
D1	15 -minute Depth to Water Data – All Monitoring Wells - Test 1 and Test 2 (hard copy)
D2	5 - minute Depth to Water Data –Pumping Wells (SWPW-1 and SWPW-2) - Test 1 and Test 2 (hard copy)
E	All Water Level Data – CD ROM

PROFESSIONAL CERTIFICATION

I, Greg Kruse, hereby certify that I am a professional geologist as that term is defined in *Wyoming Statutes 33-41*, and that, to the best of my knowledge, all of the information contained in this document is correct and the document was prepared under my supervision, in compliance with requirements of Permit to Mine 633 and applicable requirements of the Wyoming Department of Environmental Quality, Land Quality Division Rules and Regulations.

Greg Kruse, P.G. Date

EXECUTIVE SUMMARY

The Southwest Area (SWA) Regional Hydrologic Test Plan was submitted by Power Resources, Inc. (PRI) to the Nuclear Regulatory Commission (NRC) and the Wyoming Department of Environmental Quality/Land Quality Division (WDEQ/LQD) in July 2006.

In accordance with the Plan, PRI installed the necessary wells and performed two pump tests to evaluate regional hydrogeologic conditions in the vicinity of the SWA. The pump tests were designed to assess:

- The degree of general hydrologic communication between the Production Zone (K Sand) pumping wells and select monitor wells on a regional scale;
- The presence or absence of general hydrologic boundaries within the Production Zone aquifer;
- The general hydrologic characteristics of the Production Zone aquifer; and,
- The degree of general hydrologic communication, if any, between the Production Zone and the Overlying and Underlying aquifers;

The Production Zone in SWA is the K Sand. The majority of the wells monitored during this testing were completed in the K Sand. To assess stratigraphic isolation between the Production Zone and the nearest sands above and beneath the K Sand, monitor wells were also installed in the Overlying M Sand and Underlying I Sand aquifers in close proximity to the pumping wells.

Since the SWA covers a large area, two individual pump tests were performed to access regional hydrologic properties of the SWA as a license condition prior to developing uranium reserves. The pump tests were performed in SWA during the Fall of 2006. For these tests, 11 wells were monitored using automated equipment. Well SWPW-2 was used as the pumping well during Test 1 and Well SWPW-1 was used as the pumping well during Test 2.

Test 1 was conducted by pumping SWPW-2 at 26.9 gpm for 8.2 days. More than 76 feet of drawdown was achieved in the pumping well during testing. All of the K Sand monitor wells with the exception of SWPW-1 and SWMP-1 showed adequate drawdown (e.g., greater than 1 foot), which confirms hydrologic communication within the Production Zone sand.

Test 2 was conducted by pumping SWPW-1 at 27.0 gpm for 7.0 days. More than 70 feet of drawdown was achieved in the pumping well during testing. All of the K Sand monitor wells with the exception of SWPW-2 and SWMP-4 showed adequate drawdown (e.g., greater than 1 foot), which confirms hydrologic communication within the Production Zone sand.

No water level changes of concern were observed in any of the Overlying or Underlying wells in the SWA. This suggests that in the areas near the pumping wells, where the confining zones were stressed significantly, both the Overlying and Underlying aquifers are isolated from the Production Zone K Sand.

All attached maps depict a general mineralized area and does not represent proposed wellfields. Permit to Mine 633 will be amended, as needed, based upon finalized wellfield designs.

In summary, the pump tests were performed in accordance with the Hydrologic Test Plan submitted by PRI to NRC and WDEQ/LQD. The testing objectives were met. The test results demonstrate:

- The K Sand monitor wells are in communication with the K Sand pumping wells throughout the SWA;
- The K Sand has been adequately characterized with respect to hydrogeologic conditions within the SWA to proceed with ISL mining permits and operations;
- Adequate confinement exists between the K Sand Production Zone and the Overlying M and Underlying I sands in the vicinity of the pumping wells, and no obvious confinement issues were observed based on data from the distant K Sand monitoring wells. Required wellfield-scale testing, with greater monitor well density, that will be performed during the SWA development will provide additional verification of confinement.
- Adequate confinement exists between the K Sand Production Zone and the Underlying I in the SWA.
- Well-field scale mining can proceed in SWA since the License condition set forth by NRC has been met.

1.0 INTRODUCTION

1.1 BACKGROUND

The Smith Ranch-Highland Uranium Project (SR-HUP) is located in the southern Powder River Basin of east central Wyoming, within Converse County. Power Resources, Inc. (PRI) has been developing and extracting uranium from in-situ recovery (ISR) wellfields within the Smith Ranch-Highland Sand Group since 1988. This Regional Hydrologic Test Report provides a summary of the hydrogeologic testing conducted for the Southwest Area (SWA) mine development.

The Southwest Area is planned to cover portions of Sections 7, 8, 16, 17, 18, 19 and 21, T. 35 N., R. 74 W. and Sections 13 and 24, T. 35 N., R. 75 W. Converse County Wyoming. Figure 1-1 shows the relationship between the proposed SWA, adjacent wellfields and the PRI Central Processing Plant (CPC). The SWA will likely contain 4 to 5 Units (wellfields) each containing approximately two million pounds U_3O_8 in-place in the K Sand. The SWA will have its own Satellite Plant (SR-2) and associated trunk line to the CPC.

The nearest existing ISL Wellfield production is approximately one mile northeast of the eastern edge of the planned SWA development, in the lower O Sand of Mine Unit (MU) 15 (Figure 1-1).

Several historic monitoring wells are completed in the SWA (Figure 1-2). Wells completed in the K Sand include KM-8-136, KM-8-137CM, KM-8-138-8, KM-8-140P, and KM17-421. Another well (KM17-422) is completed in the Upper O Sand. Of these historic wells, PRI elected to use KM-8-136 as a monitoring well during the pump test.

One aquifer test, in two separate parts, was performed in the SWA during the fall of 2007 as a condition of PRI's Nuclear Regulatory Commission (NRC) Source Material License #SUA-1548 described in detail below. Wellfield-scale development of the SWA is anticipated to begin in the Fall of 2007.

1.2 REGULATORY REQUIREMENTS

A regional aquifer test is required under PRI's Nuclear Regulatory Commission (NRC) Source Material License #SUA-1548 Section 10.1.10 as follows: "The licensee is prohibited from conducting well-field installation in the southwestern part of the State of Wyoming permit area, T35N R74W, excluding Section 2, until aquifer characteristics have been tested, reviewed, and approved by NRC". This report will also be presented to the Wyoming Department of Environmental Quality, Land Quality Division (WDEQ/LQD) to comply with Permit #633.

It is noted that the regional aquifer test is not intended to replace wellfield-scale testing that routinely is conducted under Wyoming Department of Environmental Quality/Land

Quality Division (WDEQ/LQD) Permit to Mine No. 633. Rather, this is a specific test required under PRI's NRC license to provide additional regional hydrologic data prior to developing the SWA reserves.

The testing procedures and results are presented and discussed in this report. Baseline water quality data, and subsequent discussion, will be submitted under a separate cover.

1.3 PURPOSE AND OBJECTIVES

The purposes of this report are to summarize the results of the test and provide analytical data to (1) satisfy the NRC requirements of a regional pump test prior to conducting wellfield development in the SWA, and (2) demonstrate that SWA has been sufficiently evaluated with respect to regional hydrogeologic conditions and is suitable for ISR mining.

The specific objectives of the regional pump test were to:

1. Determine general hydrologic characteristics of the Production Zone (K Sand) Aquifer;
2. Demonstrate general hydrologic communication between the Production Zone and the surrounding Production Zone monitor wells;
3. Assess the presence of hydrologic boundaries, if any, within the Production Zone Aquifer; and,
4. Evaluate the degree of general hydrologic communication, if any, between the Production Zone and the Overlying and Underlying aquifers

The objective of this report is to present the information required by NRC and WDEQ/LQD for a Hydrologic Test Report. In accordance with NRC and State regulations and PRI's permit, the following information is included.

- A general description of the proposed mining area;
- Maps showing the location of the proposed wellfield outline;
- Geological cross-sections, including data from new monitor wells, as warranted;
- Isopach maps of the Production Zone sandstone, Overlying confining unit, sandstone, Underlying confining unit, and sandstone;
- A description of hydrologic testing, including well completion reports;
- Discussion of the hydrologic test results including raw pump test data, drawdown match curves, potentiometric surface maps, water level graphs, drawdown maps, and other hydrologic data with interpretation/conclusions, as appropriate; and,

- Verification, based on the test data, that (1) the Production Zone sand monitor wells are in communication across a large portion of the proposed mining area, and (2) over the scale and duration of the test, specifically in the vicinity of the pumping wells, there is adequate confinement between the Production Zone sand and the immediately Overlying Sandstone and Underlying Sandstone.

1.4 REPORT ORGANIZATION

This report includes eight sections, the first being this introduction. The site-specific hydrogeologic conditions are discussed in Section 2. Information related to the monitor well spacing and completion is included in Section 3. Section 4 presents the hydrologic (pump) test design and procedures; the analytical methods and test results for the K Sand Production Zone are discussed in Section 5. Historical information related to the confining units, as well as the results from the Underlying aquifer monitor wells are detailed in Section 6. Conclusions from the testing and analysis and references are included in Sections 7 and 8, respectively.

Field activities associated with this test were jointly performed by PRI and Petrotek Engineering Corporation personnel. The geological characterization of the SWA described in the report was performed by PRI's project geologists. The test analyses were performed by Petrotek. This report was compiled as a joint effort by PRI and Petrotek.

2.0 SITE-SPECIFIC HYDROGEOLOGIC CONDITIONS

Production in the SWA will be from the Tertiary Wasatch and Ft. Union Formations. The section consists of approximately 4,500 feet of fluvial sediments consisting of interbedded silty/snadstone - claystones, shales and localized thin to moderate lignitic/sub-bituminious coal beds. The host sediments for the uranium are fine to very coarse grained, relatively clean channel sands. The degree of lithification is variable, ranging from non-cemented sands to moderately well cemented siltstones and sandstones. Along the primary paleo-drainage axis (Southwest to Northeast) relatively thick stratigraphic units can be traced for several miles. Perpendicular to the channel systems, the host strata are highly lenticular with numerous facies changes occurring within short distances, typically less than a few thousand feet.

Isopach maps of the Overlying M Sand Aquifer, the Overlying L Shale Confining Unit, the K Sand Production Zone, the Underlying J Shale Confining Unit and the Underlying I Sand aquifer are shown in Figures 2-1 through 2-5, respectively. All isopach maps were generated by PRI with the SURFER software contouring package using a drill hole data set that is representative of the drill holes in the SWA.

The locations of five geologic cross-sections through the SWA are depicted on Figure 2-6. Based on PRI data and geologic interpretations, Figures 2-7, 2-8, 2-9, 2-10 and 2-11 (Cross-sections B-B', B'-B", A-A', 1-1', and 2-2', respectively), show the regional geologic cross sections in detail. The cross-sections demonstrate that the K Sand Production Zone is stratigraphically isolated from the Overlying I Sand aquifer by a low permeability confining unit (J Shale) and is isolated from the Overlying M Sand aquifer by the L Shale. Copies of the geophysical logs used for the cross-sections, at a scale of 1" = 40', are included in Appendix A. Three west-east cross-sections (Figures 2-7 through 2-9) and two north-south cross-sections (Figures 2-10 and 2-11) were constructed across the SWA. Specific to the SWA, the stratigraphic sequence of interest, in descending order, follows. References to associated isopach maps are included.

- M Sand (Overlying aquifer) - typically 20 to 80 feet thick (Figure 2-1)
- L Shale (upper confining layer) - 10 to 90 feet thick (Figure 2-2)
- K Sand (primary production zone) - 40 to 170 feet thick (Figure 2-3)
- J Shale (Underlying confining layer) - 10 to 150 feet thick (Figure 2-4)
- I Sandstone (Underlying aquifer) - 0 to 100 feet thick (Figure 2-5)

2.1 OVERLYING UNITS: L SHALE CONFINING UNIT AND M SAND AQUIFER

The Overlying M Sand aquifer (Figure 2-1) consists of sandstones similar to the K sand horizon. They are predominantly light gray to medium light gray sands, very fine to coarse grained, with occasional very coarse to pebble size, sub-rounded to sub-angular, unconsolidated to slightly consolidated, argillaceous in part, locally calcite cemented,

with trace pyrite, carbon, mica and green to black accessory minerals. It is typically observed in thicknesses ranging from 20 feet to as much as 85 feet across the SWA.

The Overlying L Shale confining layer (Figure 2-2) is composed of medium gray to olive gray shale, with interbedded lenticular gray claystones. The shales are firm to hard, blocky, sub-waxy to earthy, slightly calcareous and contain disseminated to lenticular lignitic coal stringers. The clays are soft, earthy, platy, moderately bentonitic, and micro-micaceous in part. This unit is continuous throughout the SWA, typically ranging from 20 to 90 feet thick. It does occasionally thin to approximately 10 to 25 feet; however, available data suggest that the L Shale is consistently present in the SWA.

2.2 PRODUCTION ZONE: K SAND

The primary production zone in the Southwest Area is the K sandstone. The K Sand (Figure 2-3) is a continuous sandstone unit across most of the Smith Ranch-Highland Project and specifically across the Southwest Area, where it is composed of two to three channel sands, separated by predominately continuous claystone and shale beds. The K Sand gross thickness ranges from 40 to 140 feet. For purposes of the aquifer analyses performed in this report, an average K Sand net thickness of approximately 90 feet was calculated from the cross sections. The K Sand is separated from the Overlying M Sand and Underlying I Sand by the L and J Shales, respectively (Figures 2-1 through 2-5).

The K Sand mineralization predominately occurs in the upper K Sand horizon (Figure 2-8), but may migrate into lower K Sand lenses as yet undefined. PRI has established the I Sand horizon as the Underlying aquifer.

Some sporadic uranium mineralization does occur in a shallower sandstone host designated as the Upper O Sand. This horizon will be addressed in a later wellfield-specific pump test if significant concentrations of mineral are defined.

Prior to the pump tests presented herein, no known pump tests were performed in the K Sand at SR-HUP. Based on input from PRI staff, the best analogy for the K Sand is the M Sand, which produces in MU 4 (Figure 1-1). The limited 2005 data from MU 4 indicate that, based on a thickness of 80 feet, the hydraulic conductivity of the M Sand is on the order of 1 ft/d and the storativity is approximately 2.8×10^{-4}.

Because of the relatively low hydraulic conductivity and the large distance over which the SWA Test needed to cover to comply with NRC requirements, PRI elected to conduct the Pump Test in two parts. Additional detail is provided in the following sections.

2.3 UNDERLYING UNITS: J SHALE CONFINING UNIT AND I SAND AQUIFER

The Underlying J Shale confining layer is composed of medium gray to olive gray shale, with interbedded lenticular gray claystones. The shales are firm to hard, blocky, sub-

waxy to earthy, slightly calcareous and contain disseminated to lenticular lignitic coal stringers. The clays are soft, earthy, platy, moderately bentonitic, and micro-micaceous in part. This unit is continuous throughout the SWA, typically ranging from 20 to 75 feet (Figure 2-4) and in some instances has been as much as 150 feet thick. It does occasionally thin to approximately 10 to 25 feet, but PRI data indicate consistent continuity across the SWA.

The I Sand typically occurs 30 to 75 feet below the basal K Sand, and varies in thickness from 60 to as little as 11 feet (Figure 2-5). Occasionally only a "Lower I". When this occurs the thickness between the "K" and "I" Sandstones can be as much as 90' – 120". sandstone lens is present The I Sand occasionally is completely absent, resulting in a thick lower J Shale aquitard section. However, the I Sand has sufficient continuity across the Southwest Area such that utilizing the I Sand for an Underlying monitoring zone is appropriate. The Underlying I Sand aquifer consists of sandstones identical to the K Sand horizon. They are predominantly light gray to medium light gray sands, very fine to coarse grained, with occasional very coarse to pebble size, sub-rounded to sub-angular, unconsolidated to slightly consolidated, argillaceous in part, locally calcite cemented, with trace pyrite, carbon, mica and green to black accessory minerals. It typically is observed in thicknesses ranging from 20 feet to as much as 100 feet across the SWA. The Underlying I Sand completely pinches out in localized areas of the SWA.

2.4 POTENTIOMETRIC SURFACE OF THE K SAND

Figure 4-1 is a potentiometric surface map of the K Sand Production Zone within the SWA area based on water level measurements collected on 09/07/06. Based on the data presented in Figure 4-1, the direction of groundwater flow is to the southeast with the ground water gradient of approximately 0.0038 ft/ft (20.1 ft/mile) from KM-8-136 to SWPW-4. Water level data used for preparation of this map are presented in Table 3-1.

3.0 MONITOR WELL SPACING AND COMPLETION

3.1 WELL SPACING

To conduct the pump test in the Southwest Area, PRI installed two pumping wells in the K Sand (Figures 1-2 and 2-1). One well (SWPW-1) is located in Section 18; the second pumping well (SWPW-2) is located in Section 16. The remaining K Sand monitor wells were strategically placed at radial distances of approximately 3,000 to 5,000 feet from the pumping wells to observe a cause and effect drawdown at distant monitoring wells during the two pumping periods.

Underlying and Overlying monitoring wells were installed within a radial distance of approximately 50 to 100 feet of each pumping well (Figure 1-2). The wells were located in the likely mining areas and oriented to provide the requisite regional hydrogeologic information across the majority of the proposed SWA to satisfy the requirements set forth by the NRC.

3.2 WELL INSTALLATION AND COMPLETION

The pumping and monitoring wells were drilled and completed consistent with PRI's WDEQ/LQD permit. Drilling and completion information is included in Appendix A and B.

The pumping wells (SWPW-1 and SWPW-2) were installed by PRI in the K Sand using 4.5-inch casing, and were completed across the entire K Sand thickness (Table 3-1).

The Production Zone K Sand monitor wells were constructed with 4.5-inch PVC casing; the screen intervals were underreamed to 10.5 inches. The SWMP wells were typically screened across a 50 to 110 foot interval of the Production Zone K Sand (Table 3-1). Based on the distance from the pumping well, no partial penetration effects were expected or observed. The wells were developed using standard water well construction techniques, such as pumping, surging and/or air-lifting. Completion reports for each well are provided in Appendix B.

The SWMO wells typically were screened across a 25 to 30 foot interval of the Overlying M Sand (Table 3-1). The SWMU wells were typically screened across a 15 to 40 foot interval of the Underlying I Sand (Table 3-1). The Overlying and Underlying wells were developed using standard water well construction techniques, such as pumping, surging and/or air lifting. Completion reports for each well are provided in Appendix B.

3.3 ABANDONMENT OF EXISTING WELLS

As discussed in Section 1.1, several historic wells exist in SWA (Figure 1-2). None of those wells were plugged prior to the SWA pump test.

Should any wells be discovered in the future that require abandonment, those wells will be abandoned in accordance with WS-35-11-404 and Chapter VIII of the LQD Rules and Regulations.

4.0 PUMP TEST DESIGN AND PROCEDURES

4.1 TEST DESIGN

PRI conducted a pump test in the SWA K Sand with the following objectives:

- Determine the hydrologic characteristics of the Production Zone (K Sand) Aquifer;
- Demonstrate hydrologic communication between the Production Zone pumping wells and the surrounding Production Zone monitor wells;
- Assess the presence of hydrologic boundaries, if any, within the Production Zone Aquifer over the area tested; and;
- Evaluate the degree of hydrologic communication, if any, between the Production Zone and the Overlying and Underlying aquifers.

The pump test was designed to observe a minimum drawdown of 1 to 2 feet of water in the K Sand at a radius of about 4,400 feet from each pumping well.

Figure 1-2 presents the SWA outline and the locations of the pumping and observation (monitor) wells used during the SWA hydrologic testing operations. The pumping wells (SWPW-1 and SWPW-2) were screened across the entire thickness of the K Sand Production Zone (Table 3-1). The pumps were installed with a check valve on top of the pump to allow for collection of recovery data.

Step-rate tests were performed from SWPW-1 and SWPW-2 on 08/18/06 and 08/23/06, respectively. Based on evaluation of the data (conventional analyses and Theis simulations), it was anticipated that pumping rates on the order of 30 gpm from SWPW-1 and 25 gpm from SWPW-2 would be required to achieve 1 to 2 feet of drawdown in the K Sand monitor wells within a reasonable time (e.g., about 7 days).

Because of the large area covered during the test, testing was conducted in two parts. During the first test (Test 1), well SWPW-2 was pumped; well SWPW-1 was pumped during the second test (Test 2).

The general testing procedures were as follows:

- Install automated monitoring equipment in the wells to be used in the test. Verify setting depths and head readings with manual water level measurements.

- Measure and record background water levels and barometric pressure at least every 12 hours for a minimum of 48 hours prior to each test.

- Run the pumping well at a constant rate (or as close as practical). Record water levels and barometric pressure throughout the pumping and recovery periods.

4.2 EQUIPMENT LAYOUT

Prior to the background monitoring period for each test, PRI installed a 7.5 HP electric submersible pump with a check value in the pumping well. Dual Halliburton MC-II meters were used to measure instantaneous flowrate and record total gallons pumped.

The pumps were set at approximate depths of 800 feet (340 feet below the typical static water level of 460 feet below ground surface). Flow from the pump was controlled with a manual valve. Discharge water was land applied approximately 500 to 1,000 feet from the pumping wells via a 2-inch diameter line.

All the monitor wells for each test were equipped with automated water-level recorders (In-Situ Hermit datalogger/transducers, In-Situ LevelTROLLS, and Global Water water level loggers). Water levels were also measured periodically by hand to verify that the automated equipment was functioning properly. With few exceptions, the pumping and monitoring equipment performed as designed. During the course of both tests four equipment failures occurred (SWMP-1, KM-8-136, SWPW-2, and SWMU-2). The equipment failures were attributed to rodents chewing on the transducer cables. PRI personnel made every effort to replace the cables at the depths that they were originally set. As such, some offset is observed in water levels where cables were replaced. However, the trends remained consistent throughout the tests.

PRI personnel installed the monitoring equipment prior to testing and provided day-to-day data downloads. Prior to Test 1, Petrotek personnel verified the datalogger programming and equipment layout, subsequently started the test, and supervised testing for the first 24 hours. Thereafter, PRI collected data daily and transferred the electronic data to Petrotek for review and analysis. Prior to Test 2, PRI personnel moved the necessary equipment, and collected the requisite background data. PRI personnel monitored Test 2 and transmitted electronic data to Petrotek.

The monitor wells used for the test, distance from each monitor well to the pumping well, and the drawdown observed are presented in Table 4-1. The equipment layout, including distinction between equipment types and pressure ratings for each transducer, is shown on Table 4-2. A summary of the wells used for observation points during the SWA testing follows.

Summary of Monitor Wells – SWA	
Well Designation	*Number*
K Sand Monitor Wells (SWMP wells + KM-8-136)	5
Overlying M Sand Monitor Wells (SWMO wells)	2
Underlying I Sand Wells (SWMU wells)	2
K Sand Pumping Wells (SWPW wells)	2
Total	11

The distances of the respective monitor wells from the pumping well range from 3,585 to 11,873 feet (distant monitor wells in the K Sand), 66 to 9,078 feet (Overlying completions), and 49 to 9,077 feet (Underlying completions) (Table 4-1).

4.3 BACKGROUND MONITORING, TEST PROCEDURES AND DATA COLLECTION

The background monitoring period for Test 1 began on 08/23/06 at 08:00 hours. Water levels were recorded every 15 minutes for approximately 15 days (21,660 minutes). In this regard, the background monitoring duration and frequency significantly exceeded the minimum requirements specified in the Hydrologic Test Plan. A potentiometric map for the K Sand, based on manual (electric-line) data collected on 09/07/06 is shown as Figure 4-1. Background monitoring data for the K Sand monitor wells are shown on Figure 4-2.

Test 1 was performed by pumping SWPW-2 at an average rate of 26.9 gpm from 09:00 hours on 09/07/06 until 13:00 hours on 09/15/06. The total pumping duration was 196 hours (11,760 minutes). The drawdown achieved in the pumping well was 76.5 feet; drawdown in the K Sand monitor wells ranged from –0.17 to 4.83 feet (Table 4-1). Except for the pumping well data, which were recorded every 5 minutes during the pumping and recovery periods, water levels were automatically measured and recorded every 15 minutes during the pumping and recovery periods. Pumping rate data for the pump test are shown on Table 4-3. Water-level recovery was monitored for 27,210 minutes until 10:30 hours on 10/04/06. A list of K Sand monitor wells, the distance of those wells from the pumping well, and the drawdown measured during the pumping period for all the wells are summarized in Table 4-1.

The background monitoring period for the Test 2 began on 10/04/06 at 10:30 hours. Water levels were recorded every 15 minutes for almost 2 days, (2,785 minutes). No potentiometric map for the K Sand was prepared prior to initiating Test 2 because the data collected on 09/07/06 (Figure 4-1) best represent static background water level conditions.

Test 2 was performed by pumping SWPW-1 at an average rate of 27 gpm from 08:55 hours on 10/06/06 until 09:00 hours on 10/13/06. The total pumping duration was 168.1 hours (10,085 minutes). The drawdown achieved in the pumping well was 70.2 feet; drawdown in the K Sand monitor wells ranged from –0.24 to 3.81 feet (Table 4-1). Except for the pumping well data, which were recorded every 5 minutes during the pumping and recovery periods, water levels were automatically measured and recorded

every 15 minutes during the pumping and recovery periods. Pumping rate data for the pump test are shown on Table 4-4. Water-level recovery was monitored for 15,900 minutes until 10:00 hours on 10/24/06.

5.0 ANALYTICAL METHODS AND TEST RESULTS – PRODUCTION ZONE

5.1 ANALYTICAL METHODS

Drawdown data collected from the monitor wells were graphically analyzed to determine Transmissivity and Storativity. The primary analysis method used was Theis (1935) based on a confined net aquifer thickness of 90 feet (calculated from cross sections). The use of the Cooper & Jacob time-drawdown (1946) method was considered. However, because of the formation characteristics and large observation well distances, the 'u' assumption limitation (< 0.01) inherent to the Cooper & Jacob method was not satisfied. The pumping well data were analyzed using the Theis Recovery (1935) method.

The test data were analyzed using the method of Theis because this method is mathematically valid for all distances and times. The significant assumptions inherent in this method include:

- The aquifer is confined and has apparent infinite extent
- The aquifer is homogeneous and isotropic, and of uniform effective thickness over the area influenced by pumping
- The piezometric surface is horizontal prior to pumping
- The well is pumped at a constant rate
- The pumping well is fully penetrating
- Well diameter is small, so well storage is negligible

These assumptions are reasonably satisfied, with the exception of the uniform thickness of the aquifer. The variation in thickness (Figure 2-3) is manifested by changes in Transmissivity and Storativity. Obviously, the K Sand is not homogeneous and isotropic; however, over the scale of the pump tests, it can be treated in this manner.

Leaky aquifer solutions such as Hantush (1955) were not applicable to the data from the K Sand, the Overlying (M Sand), or the Underlying (I Sand) completions. Likewise, because none of the monitor wells were completed within the confining units, a Neuman-Witherspoon (1972) analysis was not performed. The software used to graphically analyze the data was AquiferTest Pro (Waterloo Hydrogeologic, Inc., 2002).

5.2 BACKGROUND TRENDS

Water level stability data were collected prior to the start of the Test 1. Background data for the K Sand pump and monitor wells are shown in Figure 4-2. Background data for the M and I Sand monitor wells are shown in Figure 4-3 and 4-4, respectively. Figures 4-2 through 4-4 indicate that water levels in the Production Zone, Overlying and Underlying monitor wells were reasonably stable prior to the start of the pumping period.

No significant recharge or trend corrections were warranted for any of the K Sand wells. Background monitoring, pumping, and recovery periods for the K Sand, M Sand and I Sand monitor wells and pumping wells are presented in Figure in Figures 5-1 and 5-2, respectively. The water levels are compared to barometric pressure (inches Hg) for the entire period.

Additional information related to the Overlying and Underlying wells is discussed in Section 6. As noted previously, several transducer cables were replaced during the tests due to rodents chewing on the cables. PRI personnel made every attempt to place the new cables at the same depth as the damaged ones. No data corrections were performed.

5.3 TEST RESULTS

5.3.1 Drawdown

Test 1

The potentiometric surface observed at the end of Test 1 (SWPW-2) is shown in plan view on Figure 5-3. Drawdown over time during the Test for the pumping well (SWPW-2) is shown on Figure 5-4. An example Theis type curve match (SWMP-3) is presented as Figure 5-5. The water level responses in K Sand monitor wells are shown in Figure 5-6.

Test 2

The potentiometric surface observed at the end of Test 2 (SWPW-1) is shown in plan view on Figure 5-5. Drawdown over time during the Test for the pumping well (SWPW-1) is shown on Figure 5-7. The water level responses in K Sand monitor wells are shown in Figure 5-6.

5.3.2 Analytical Results

Since two tests were performed in the SWA, only data that exhibited a strong cause and effect relationship due to pumping were used in the analyses. If a monitor well exhibited a cause and effect relationship during both tests then the analysis was performed on the test in which it exhibited the greater response. These data are highlighted in Tables 5-1 and 5-2.

Transmissivity (T) results from the Theis analysis range from 58.6 to 185.8 ft^2/d, with an average T value of 125.2 ft^2/d. Based on an average thickness of 90 feet, the average hydraulic conductivity (K) is 1.39 ft/d (4.9×10^{-4} cm/s) (Table 5-1) equates to a permeability of approximately 555 millidarcies (md) (based on a viscosity of 1.1 cp and a water density of 1.0 g/cc). Storativity (S) values range from 5.4×10^{-5} to 1.3×10^{-4}. The average S value for both tests was 8.5×10^{-5}.

Type curve matches for all of the K Sand monitor wells included in the pump test are provided in Appendix C. Fifteen-minute depth to water data for the K Sand monitor wells are included in Appendix D1; 5-minute data for the pumping wells are included in Appendix D2. All water level data for all monitor wells from background through pumping and recovery are included in Appendix E (CD ROM).

5.4 DIRECTIONAL PERMEABILITY

The Transmissivity results correlate reasonably well with the thickness of the K Sand in SWA (see Figure 2-3). In general, higher T values are reported in the areas of thicker sand and roughly parallel to the direction of regional deposition. The test data do not indicate a strong trend in directional permeability (see Figure 5-8). The observed variation in T is not expected to significantly impact ISL mining and has no known regulatory implications.

6.0 TEST RESULTS – CONFINING UNITS

6.1 HISTORICAL LABORATORY AND FIELD RESULTS

Confining unit vertical hydraulic conductivity has been well established on the Highland portion of the HUP. Few data are available for the Smith Ranch operation; however, it is possible to correlate many of the confining units between the Highland and Smith Ranch operations.

The following table includes data from the Highland operation, and units that can be correlated to Smith Ranch. The data indicate that vertical conductivities from core and pump test results range from 9.3×10^{-11} cm/sec (2.6×10^{-7} ft/d) to 4.2×10^{-7} cm/sec (1.4×10^{-3} ft/d). The range of vertical conductivity for the confining units are approximately 3 to 7 orders of magnitude less than the horizontal hydraulic conductivity in the K Sand.

Based on the historical testing and laboratory information and the site stratigraphy, absent man-made pathways (such as improperly completed or abandoned wells) the migration of injection fluids into the Underlying and Overlying sands is not anticipated to occur under typical mining conditions in accordance with PRI's permit to Mine No. 633.

The pump test data indicate "no leakage" from the mining zone to Overlying completions. Obviously, more detailed information will be provided when well field-scale testing is conducted during the SWA development.

VERTICAL HYDRAULIC CONDUCTIVITY DATA

Highland Wellfield	Highland Confining Unit	Smith Ranch Wellfield	Equivalent Smith Ranch Confining Unit	Vertical Hydraulic Conductivity (cm/sec)	Method
A, B	15 Shale	2,3,4,4A, 15	N Shale; confining unit below the O Sand	1.1E-8 to 5.1E-8	Neuman/Witherspoon pump test analysis and laboratory core analysis
A,B,D,F	35 Shale		Shale between O1 and O2 Sands	2.3E-10 to 1.07 E-7	Neuman/Witherspoon pump test analysis (1972) and laboratory core analysis
C– North D, H	45 Shale		Shale within O2 Sand	1.5E-10 to 1.2 E-8	Neuman/Witherspoon pump test analysis and laboratory core analysis
C– North E, F, H	55 Shale		Shale between O2 and O3 Sands	9.3E-11 to 4.2E-7	Neuman/Witherspoon pump test analysis and laboratory core analysis
na	85 Shale	1,15	P Shale; confining unit above the O Sand	3.8E-8 to 3.8E-7	MU2 area underground mine dewatering test (1975)

6.2 SOUTHWEST AREA RESULTS: OVERLYING UNIT

Plots of water levels in the Overlying (SWMO) completions for the background monitoring, pumping, and recovery periods are presented in Figure 6-1. The water levels are compared to barometric pressure (inches of Hg) for the entire period.

No water-level change of significance was observed in the Overlying completions as a result of pumping in the K Sand. Review of these data indicated that, while minor background trends are present, the nature of those trends continues independently of the pump tests. The nearest Overlying aquifer monitor well (SWMO-1) is approximately 66 feet away from the pumping well (SWPW-1).

Potentiometric levels in the Overlying M Sand at the SWPW-1 location are approximately 48.7 feet higher than those in the Production (K) Sand, while potentiometric levels in the Overlying M Sand at the SWPW-2 location are approximately 13.2 feet lower than those in the Production (K) Sand (Table 3-1). Further characterization of the potentiometric surface of the Overlying M Sand will be performed on a well-field scale.

Barometric pressure corrections as based on the Barometric Efficiency method (Freeze and Cherry, 1979) did not appear to significantly improve the data analysis; therefore no barometric pressure corrections were applied to the data.

6.3 SOUTHWEST AREA RESULTS: UNDERLYING UNIT

Plots of water levels in the Underlying (SWMU) completions for the background monitoring, pumping, and recovery periods are presented in Figure 6-2. The water levels are compared to barometric pressure (inches Hg) for the entire period.

No water-level change of significance was observed in the Underlying completions as a result of pumping in the K Sand. Review of these data indicated that, while minor background trends are present, the nature of those trends continues independently of the pump tests. The nearest Underlying aquifer monitor well (SWMU-1) is approximately 49 feet away from the pumping well (SWPW-1).

Potentiometric levels in the Underlying I Sand at the SWPW-1 location are approximately 5.4 feet higher than those in the Production (K) Sand, while potentiometric levels in the Underlying I Sand at the SWPW-2 location are approximately 27.0 feet lower than those in the production (K) Sand (Table 3-1). Further characterization of the potentiometric surface of the Underlying I Sand will be performed on a well-field scale.

Barometric pressure corrections based on the Barometric Efficiency method (Freeze and Cherry, 1979) did not appear to significantly improve the data analysis; therefore no barometric pressure corrections were applied to the data.

6.4 INTEGRITY OF CONFINING UNITS

The historical field and laboratory data, and the results of the SWA pump test, indicate that adequate confinement is present above the K Sand in the vicinity of the pumping wells (e.g., in areas where the confining zones were stressed significantly). Geologic data indicate that those same confining zones are continuous across the planned mining patterns in the SWA. Hence, it is anticipated that adequate geologic confinement exists across the SWA. Additional wellfield scale testing will provide additional detailed information to support this assumption.

7.0 SUMMARY AND CONCLUSIONS

In accordance with the SWA Hydrologic Test Plan, PRI installed the necessary wells and performed two pump tests to evaluate regional hydrogeologic conditions in the vicinity of SWA. The collective aquifer testing operations were performed in the SWA during the fall of 2006 as a condition of PRI's Nuclear Regulatory Commission (NRC) Source Material License #SUA-1548 described in detail below. Wellfield-scale development of the SWA is anticipated to begin in the Fall of 2007.

The conduct of these tests fulfills the condition set forth in PRI's Nuclear Regulatory Commission (NRC) Source Material License #SUA-1548 Section 10.1.10 which states: "The licensee is prohibited from conducting well-field installation in the southwestern part of the State of Wyoming permit area, T35N R74W, excluding Section 2, until aquifer characteristics have been tested, reviewed, and approved by NRC".

The pump test was performed in SWA during the Fall of 2006. Well SWPW-2 was used as a pumping well during Test 1; well SWPW-1 was pumped during Test 2. More than 76 and 70 feet of drawdown was achieved in the pumping well during Test 1 and Test 2, respectively, resulting in sufficient stress in the Production Zone and the confining layers for the purposes of the test and PRI's specific NRC permit requirements. All of the K Sand monitor wells showed adequate drawdown (e.g., greater than 1 foot).

Analysis of the test data for the Production Zone wells resulted in an average Transmissivity of 125.2 ft^2/day, an average hydraulic conductivity of 1.39 ft/day (4.9 x 10^{-4} cm/sec) and an average permeability (assuming a water viscosity of 1.1 cp and density of 1.0 g/cc) of 555 millidarcies (md). The average Storativity was 8.5 x 10^{-5}. The data analysis did not indicate the presence of significant geologic boundaries within the Production Zone aquifer over the area evaluated by the testing.

No water level changes of concern were observed in any of the Overlying wells during the testing. The nearest Overlying aquifer monitor well (SWMO-1; Test 2) was approximately 66 feet away from the pumping well.

The nearest Underlying monitor well (SWMU-1; Test2) was approximately 49 feet distant from the pumping well. No water level changes of concern were observed in this well, or in the other Underlying well (SWMU-2), during the test.

In summary, the pump test was performed in accordance with the Hydrologic Test Plan submitted by PRI to NRC and WDEQ/LQD. The testing objectives were met. The test results demonstrate:

- ❖ The K Sand monitor wells are in communication with the K Sand pumping wells over the area tested;

- ❖ The K Sand has been adequately characterized with respect to hydrogeologic conditions within SWA to continue with mine development in accordance with Permit to Mine 633;

- ❖ Adequate confinement has been demonstrated between the K Sand Production Zone and the Overlying and Underlying aquifers in the vicinity of the pumping wells. PRI's geologic information support the continuity of those confining units throughout the planned mining SWA wellfields. Additional wellfield-scale testing to be conducted during wellfield development is expected to provide additional confirmation of confinement.

8.0 REFERENCES

Cooper, H.H. and C.E. Jacob, 1946. A generalized graphical method for evaluating formation constants and summarizing well field history, Am. Geophys. Union Trans., vol. 27, pp. 526-534.

Freeze, R.A. and J.A. Cherry, 1979. Groundwater, Prentice-Hall, Inc. Englewood Cliffs, New Jersey 07632, 29 p., 233 p.

Hantush, M.S. and C.E. Jacob, 1955. Non-steady radial flow in an infinite leaky aquifer, Am. Geophys. Union Trans., vol. 36, pp. 95-100.

Power Resources, Inc., July 2006. Southwest Area Hydrologic Test Plan; Submitted to NRC and WDEQ/LQD.

Neuman, S.P. and P.A. Witherspoon, 1972. Field Determination of the Hydraulic Properties of Leaky Multiple Aquifer Systems. Water Resources Research. vol. 8, No. 5.

Theis, C.V., 1935. The relation between the lowering of the piezometric surface and the rate and duration of discharge of a well using groundwater storage, Am. Geophys. Union Trans., vol.16, pp.519-524.

Table 3-1
Power Resources, Inc.
SWA Wellfield Well Information
SWA Regional Aquifer Tests

Well	North	East	Township & Range	Section	Surface Elevation (ft; AMSL)	Casing Stickup (ft)	TOC Elev. (ft; AMSL)	Hole Depth (ft; bgs)	Casing Depth (ft; bgs)	Top Screen (ft; bgs)	Bottom Screen (ft; bgs)	Screen Length (ft)	Screen Interval (sand ID)	Casing O.D. (in.)	09/07/06 Static Depth to Water (ft; TOC)	09/07/06 Water Elevation
SWPW-1	851,720.42	336,626.06	T35N R74W	18	5,705.36	5,706.82	1.46	960	840	840	890	50	'K' Sand	4.5	462.00	5,244.82
SWPW-2	851,919.00	345,652.00	T35N R74W	16	5,662.62	5,663.32	0.70	1,000	930	930	1,030	100	'K' Sand	4.5	433.62	5,229.70
KM-8-136	855,502.13	339,406.10	T35N R74W	8	5,568.16	5568.71	0.55	870	814	814	870	56	'K' Sand	4.5	327.75	5,240.96
SWMP-1	851,435.31	333,788.56	T35N R74W	18	5,865.47	5,866.32	0.85	1,080	940	940	1,050	110	'K' Sand	4.5	619.06	5,247.26
SWMP-2	853360.2	340,948.85	T35N R74W	17	5,632.41	5,633.31	0.90	960	870	870	945	75	'K' Sand	4.5	394.20	5,239.11
SWMP-3	853652	342,513.96	T35N R74W	17	5,622.80	5,624.10	1.30	950	895	895	945	50	'K' Sand	4.5	386.79	5,237.31
SWMP-4	847610	347,461.77	T35N R74W	21	5,475.08	5,476.38	1.30	840	730	730	815	85	'K' Sand	4.5	275.74	5,200.65
SWMO-1	851763	336,575.00	T35N R74W	18	5,711.37	5712.58	1.21	810	765	765	790	25	Overlying 'M' Sand	4.5	419.09	5,293.49
SWMO-2	851830	345,593.10	T35N R74W	16	5,651.65	5,652.60	0.95	900	840	840	870	30	Overlying 'M' Sand	4.5	420.94	5,231.66
SWMU-1	851721	336,577.41	T35N R74W	18	5,708.42	5,708.42	0.00	1,060	1,020	1,020	1,035	15	Underlying 'I' Sand	4.5	473.32	5,235.10
SWMU-2	851894	345,589.79	T35N R74W	16	5,658.48	5,659.23	0.75	1,100	1,060	1,060	1,100	40	Underlying 'I' Sand	4.5	456.48	5,202.75

Table 4-1
Power Resources, Inc.
SWA Regional Aquifer Tests
Distances to Pumping Well and Observed Drawdown

Test 1 - SWPW-2

Location 9/7/06 9:00
End Date & Time: 9/15/06 13:00
Duration (minutes): 11,760
Ave. Pumping Rate: 26.9

Completion Type	Well No.	Distance from Pumping Well (ft)	Drawdown 0.000059 (ft)
Pumping Well	SWPW-2	0	76.46
Ore Zone Completions	SWMP-1	11,873	-0.17
	SWMP-2	4,919	2.67
	SWMP-3	3,585	4.83
	SWMP-4	4,674	1.15
	KM-8-136	7,201	1.04
	SWPW-1	9,028	0.05
Overlying Completions	SWMO-1	9,078	-0.14
	SWMO-2	106	-0.16
Underlying Completions	SWMU-1	9,077	-0.14
	SWMU-2	67	-1.61

Test 2 - SWPW-1

Start Date & Time: 10/6/06 8:55
End Date & Time: 10/13/06 9:00
Duration (minutes): 10,085
Ave. Pumping Rate: 27.0

Completion Type	Well No.	Distance from Pumping Well (ft)	Drawdown At End of Test (ft)
Pumping Well	SWPW-1	0	70.22
Ore Zone Completions	SWMP-1	4,694	3.81
	SWMP-2	4,623	1.55
	4694	6,197	0.99
	SWMP-4	11,589	-0.24
	KM-8-136	4,694	1.39
	SWPW-2	9,028	Transducer failure
Overlying Completions	SWMO-1	66	-0.04
	SWMO-2	8,968	-0.03
Underlying Completions	SWMU-1	49	-0.16
	SWMU-2	8,965	0.00

Table 4-2
Power Resources, Inc.
Equipment Layout: SWA Regional Aquifer Tests

Test No. 1 - SWPW-2		
Location	**Monitoring Equipment**	**PSI Range**
KM-8-136	In-Situ Hermit/Transducer	20
SWPW-1	In-Situ LevelTROLL	50
SWMO-1	In-Situ Hermit/Transducer	10
SWMU-1	In-Situ Hermit/Transducer	10
SWPW-2	In-Situ LevelTROLL	100
SWMO-2	In-Situ Hermit/Transducer	10
SWMU-2	In-Situ Hermit/Transducer	10
SWMP-1	In-Situ Hermit/Transducer	20
SWMP-2	Global Water - Water Level Logger	10
SWMP-3	Global Water - Water Level Logger	10
SWMP-4	In-Situ Hermit/Transducer	20

Test No. 2 - SWPW-1		
	Monitoring Equipment	**PSI Range**
KM-8-136	In-Situ Hermit/Transducer	20
SWPW-1	In-Situ LevelTROLL	100
SWMO-1	In-Situ Hermit/Transducer	10
SWMU-1	In-Situ Hermit/Transducer	10
SWPW-2	In-Situ Hermit/Transducer	50
SWMO-2	In-Situ Hermit/Transducer	10
SWMU-2	In-Situ Hermit/Transducer	10
SWMP-1	In-Situ Hermit/Transducer	20
SWMP-2	Global Water - Water Level Logger	10
SWMP-3	Global Water - Water Level Logger	10
SWMP-4	In-Situ Hermit/Transducer	20

Table 4-3
Power Resources, Inc.
SWA Regional Aquifer Tests
Flow Rate vs. Time:

Test No. 1 - SWPW-2 Rate Data												
DATE/TIME	MINUTES	INCREMENTAL MINUTES	TOTALIZER 1	TOTALIZER 2	T1 INCREMENTAL	T2 INCREMENTAL	CALC. T1 RATE	CALC. T2 RATE	CALC. T1T2 AVG	INSTANTANEOUS T1 RATE	INSTANTANEOUS T2 RATE	Comments
9/7/06 9:00	0	0	0	0	0	0	0.0	0.0	0.0	0.0	0.0	Pump on
9/7/06 9:05	5	5	138	141	138	141	27.6	28.2	27.9	25.0	25.3	
9/7/06 9:18	18	13	490	498	352	357	27.1	27.5	27.3	25.1	25.4	
9/7/06 12:07	187	169	5,037	5,098	4,547	4,600	26.9	27.2	27.1	24.9	25.1	
9/7/06 14:48	348	161	9,461	9,576	4,424	4,478	27.5	27.8	27.6	24.9	25.0	
9/7/06 21:00	720	372	19,834	20,085	10,373	10,509	27.9	28.3	28.1	24.8	24.9	
9/8/06 3:00	1,080	360	0	29,231	-19,834	9,146	-55.1	25.4	-14.8	24.8	24.8	
9/8/06 9:00	1,440	360	38,659	39,133	38,659	9,902	107.4	27.5	67.4	24.7	25.0	
9/8/06 14:45	1,785	345	47,952	48,553	9,293	9,420	26.9	27.3	27.1	24.8	25.0	
9/8/06 20:50	2,150	365	57,460	58,176	9,508	9,623	26.0	26.4	26.2	24.6	25.0	
9/9/06 2:55	2,515	365	67,310	68,139	9,850	9,963	27.0	27.3	27.1	24.6	24.8	
9/9/06 9:15	2,895	380	78,808	79,761	11,498	11,622	30.3	30.6	30.4	24.6	24.8	
9/9/06 15:00	3,240	345	86,773	87,808	7,965	8,047	23.1	23.3	23.2	24.6	24.8	
9/9/06 21:00	3,600	360	95,978	97,110	9,205	9,302	25.6	25.8	25.7	25.6	24.6	
9/10/06 2:50	3,950	350	105,435	106,666	9,457	9,556	27.0	27.3	27.2	24.4	24.6	
9/10/06 9:15	4,335	385	116,355	117,694	10,920	11,028	28.4	28.6	28.5	24.5	24.8	
9/10/06 15:20	4,700	365	125,955	127,401	9,600	9,707	26.3	26.6	26.4	24.8	24.8	
9/10/06 20:15	4,995	295	134,149	135,695	8,194	8,294	27.8	28.1	27.9	24.7	24.1	
9/11/06 3:05	5,405	410	144,753	146,024	10,604	10,329	25.9	25.2	25.5	24.6	24.8	
9/11/06 9:00	5,760	355	153,830	155,622	9,077	9,598	25.6	27.0	26.3	24.6	24.7	
9/11/06 15:00	6,120	360	163,395	165,307	9,565	9,685	26.6	26.9	26.7	24.7	24.9	
9/11/06 21:00	6,480	360	172,466	174,499	9,071	9,192	25.2	25.5	25.4	24.6	24.8	
9/12/06 3:00	6,840	360	182,208	184,363	9,742	9,864	27.1	27.4	27.2	24.5	24.8	
9/12/06 9:24	7,224	384	192,801	195,098	10,593	10,735	27.6	28.0	27.8	24.4	24.6	
9/12/06 15:32	7,592	368	202,624	205,050	9,823	9,952	26.7	27.0	26.9	24.8	25.0	
9/12/06 21:00	7,920	328	211,232	213,781	8,608	8,731	26.2	26.6	26.4	24.7	24.9	
9/13/06 3:20	8,300	380	221,536	224,234	10,304	10,453	27.1	27.5	27.3	24.7	24.8	
9/13/06 9:01	8,641	341	230,619	233,929	9,083	9,695	26.6	28.4	27.5	24.7	24.8	
9/13/06 15:08	9,008	367	240,433	243,383	9,814	9,454	26.7	25.8	26.3	24.8	25.0	
9/13/06 21:00	9,360	352	249,779	252,872	9,346	9,489	26.6	27.0	26.8	24.6	24.8	
9/14/06 2:58	9,718	358	259,336	262,560	9,557	9,688	26.7	27.1	26.9	24.6	24.8	
9/14/06 8:52	10,072	354	268,777	272,121	9,441	9,561	26.7	27.0	26.8	24.6	24.8	
9/14/06 15:00	10,440	368	278,756	282,236	9,979	10,115	27.1	27.5	27.3	24.7	24.9	
9/14/06 21:26	10,826	386	288,854	292,476	10,098	10,240	26.2	26.5	26.3	24.6	24.7	
9/15/06 3:00	11,160	334	297,743	301,484	8,889	9,008	26.6	27.0	26.8	24.5	24.6	
9/15/06 9:00	11,520	360	307,195	311,054	9,452	9,570	26.3	26.6	26.4	24.5	24.7	
9/15/06 13:00	11,760	240	313,507	317,438	6,312	6,384	26.3	26.6	26.5	24.5	24.7	Pump off
								Averages:	26.9	24.7	24.8	

Table 4-4
Power Resources, Inc.
SWA Regional Aquifer Tests
Flow Rate vs. Time:

Test No. 2 - SWPW-1 Rate Data												
DATE/TIME	MINUTES	INCREMENTAL MINUTES	TOTALIZER 1	TOTALIZER 2	T1 INCREMENTAL	T2 INCREMENTAL	CALC. T1 RATE	CALC. T2 RATE	CALC. T1T2 AVG	INSTANTANEOUS T1 RATE	INSTANTANEOUS T2 RATE	Comments
10/6/06 9:00	0	0	0	0	0	0	0.0	0.0	0.0	0.0	0.0	Pump on
10/6/06 9:10	10	10	0	276	0	276	0.0	27.6	13.8	0.0	0.0	T1 not cooperating
10/6/06 10:56	116	106	5	3,476	5	3,200	0.0	30.2	15.1	0.0	0.0	T1 not cooperating
10/6/06 14:45	345	229	6,190	10,189	6,185	6,713	27.0	29.3	28.2	0.0	27.4	T1 back online
10/6/06 21:00	720	375	16,581	21,505	10,391	11,316	27.7	30.2	28.9	27.1	27.2	
10/7/06 3:00	1,080	360	25,798	31,548	9,217	10,043	25.6	27.9	26.8	27.0	27.2	
10/7/06 10:00	1,500	420	37,594	44,370	11,796	12,822	28.1	30.5	29.3	27.3	28.2	
10/7/06 15:30	1,830	330	46,482	54,040	8,888	9,670	26.9	29.3	28.1	27.2	27.1	
10/7/06 22:40	2,260	430	58,178	66,763	11,696	12,723	27.2	29.6	28.4	27.0	27.3	
10/8/06 3:10	2,530	270	65,780	75,035	7,602	8,272	28.2	30.6	29.4	27.1	27.2	
10/8/06 9:00	2,880	350	74,762	84,813	8,982	9,778	25.7	27.9	26.8	27.1	27.3	
10/8/06 15:00	3,240	360	84,895	95,951	10,133	11,138	28.1	30.9	29.5	27.1	27.3	
10/8/06 21:00	3,600	360	94,057	105,847	9,162	9,896	25.5	27.5	26.5	27.3	27.3	
10/9/06 12:00	4,500	900	119,615	133,742	25,558	27,895	28.4	31.0	29.7	27.8	27.4	
10/9/06 15:00	4,680	180	123,505	137,985	3,890	4,243	21.6	23.6	22.6	27.0	27.6	
10/9/06 22:00	5,100	420	135,480	151,057	11,975	13,072	28.5	31.1	29.8	27.3	27.5	
10/10/06 3:15	5,415	315	143,813	160,151	8,333	9,094	26.5	28.9	27.7	27.3	27.5	
10/10/06 9:29	5,789	374	153,911	171,171	10,098	11,020	27.0	29.5	28.2	27.2	27.4	
10/10/06 14:20	6,080	291	161,745	179,721	7,834	8,550	26.9	29.4	28.2	27.1	27.3	
10/11/06 10:45	7,305	1225	194,754	215,774	33,009	36,053	26.9	29.4	28.2	27.0	27.2	
10/11/06 14:48	7,548	243	201,349	222,977	6,595	7,203	27.1	29.6	28.4	27.0	27.3	
10/11/06 20:30	7,890	342	210,230	232,627	8,881	9,650	26.0	28.2	27.1	27.0	27.1	
10/12/06 9:25	8,665	775	231,536	255,895	21,306	23,268	27.5	30.0	28.8	27.0	27.2	
10/12/06 14:55	8,995	330	240,312	265,486	8,776	9,591	26.6	29.1	27.8	27.0	27.3	
10/12/06 21:00	9,360	365	250,250	276,304	9,938	10,818	27.2	29.6	28.4	27.1	27.3	
10/13/06 2:45	9,705	345	259,544	286,438	9,294	10,134	26.9	29.4	28.2	26.9	27.0	
10/13/06 9:00	10,080	375	269,557	297,345	10,013	10,907	26.7	29.1	27.9	26.9	27.0	Pump off
								Averages:	27.0	24.0	25.2	

Table 5-1
Summary of Pump Test Results
Power Resources, Inc. SWA Regional Aquifer Tests

Test No. 1 - SWPW-2				
Well	Distance from Pumping Well (feet)	Analytical Results	Analytical Method	
			Theis	Theis Recovery
SWMP-1	11,873	Transmissivity (ft^2/day)	Did not respond	NA
		Hyd. Cond. (ft/day)	Did not respond	NA
		Storativity	Did not respond	NA
SWMP-2	4,919	Transmissivity (ft^2/day)	1.07E+02	NA
		Hyd. Cond. (ft/day)	1.19E+00	NA
		Storativity	5.90E-05	NA
SWMP-3	3,585	Transmissivity (ft^2/day)	1.00E+02	NA
		Hyd. Cond. (ft/day)	1.11E+00	NA
		Storativity	5.37E-05	NA
SWMP-4	4,674	Transmissivity (ft^2/day)	1.35E+02	NA
		Hyd. Cond. (ft/day)	1.50E+00	NA
		Storativity	1.32E-04	NA
SWPW-1	9,028	Transmissivity (ft^2/day)	2.63E+01	NA
		Hyd. Cond. (ft/day)	2.92E-01	NA
		Storativity	4.47E-05	NA
KM-8-136	7,201	Transmissivity (ft^2/day)	1.38E+02	NA
		Hyd. Cond. (ft/day)	1.53E+00	NA
		Storativity	3.04E-05	NA
SWPW-2	Pumping Well	Transmissivity (ft^2/day)	NA	5.86E+01
		Hyd. Cond. (ft/day)	NA	6.52E-01
		Storativity	NA	NA

Test No. 2 - SWPW-1				
Well	Distance from Pumping Well (feet)	Analytical Results	Analytical Method	
			Theis	Theis Recovery
SWMP-1	4,694	Transmissivity (ft^2/day)	1.58E+02	NA
		Hyd. Cond. (ft/day)	1.76E+00	NA
		Storativity	7.92E-05	NA
SWMP-2	4,623	Transmissivity (ft^2/day)	1.95E+02	NA
		Hyd. Cond. (ft/day)	2.16E+00	NA
		Storativity	9.97E-05	NA
SWMP-3	6,197	Transmissivity (ft^2/day)	1.82E+02	NA
		Hyd. Cond. (ft/day)	2.02E+00	NA
		Storativity	8.48E-05	NA
SWMP-4	11,589	Transmissivity (ft^2/day)	Did not respond	NA
		Hyd. Cond. (ft/day)	Did not respond	NA
		Storativity	Did not respond	NA
SWPW-2	9,028	Transmissivity (ft^2/day)	Transducer Failure	NA
		Hyd. Cond. (ft/day)	Transducer Failure	NA
		Storativity	Transducer Failure	NA
KM-8-136	4,694	Transmissivity (ft^2/day)	1.86E+02	NA
		Hyd. Cond. (ft/day)	2.06E+00	NA
		4693.61	9.97E-05	NA
SWPW-1	Pumping Well	Transmissivity (ft^2/day)	NA	1.31E+02
		Hyd. Cond. (ft/day)	NA	1.46E+00
		Storativity	NA	NA

Average Transmissivity (ft^2/day) = 1.25E+02
Average Hyd. Cond. (ft/day) = 1.39E+00
Average Storativity = 8.47E-05

Data highlighted in yellow is the data used in the final analysis due to strength of responses observed.

Table 5-2
Summary of Transmissivity Results:
Power Resources, Inc. SWA Regional Aquifer Tests

Test No. 1 - SWPW-2	
Well	Theis Transmissivity (ft^2/d)
SWMP-1	Did not respond
SWMP-2	107.2
SWMP-3	100
SWMP-4	135
SWPW-1	26
KM-8-136	138
SWPW-2	59

Test No. 2 - SWPW-1	
Well	Theis Transmissivity (ft^2/d)
	158
SWMP-2	194.5
SWMP-3	181.5
SWMP-4	Did not respond
SWPW-2	Transducer failure
KM-8-136	185.8
SWPW-1	131.5

Average T = 125.2 ft^2/day

Data highlighted in yellow are the data used for the iso-transmissivity map.

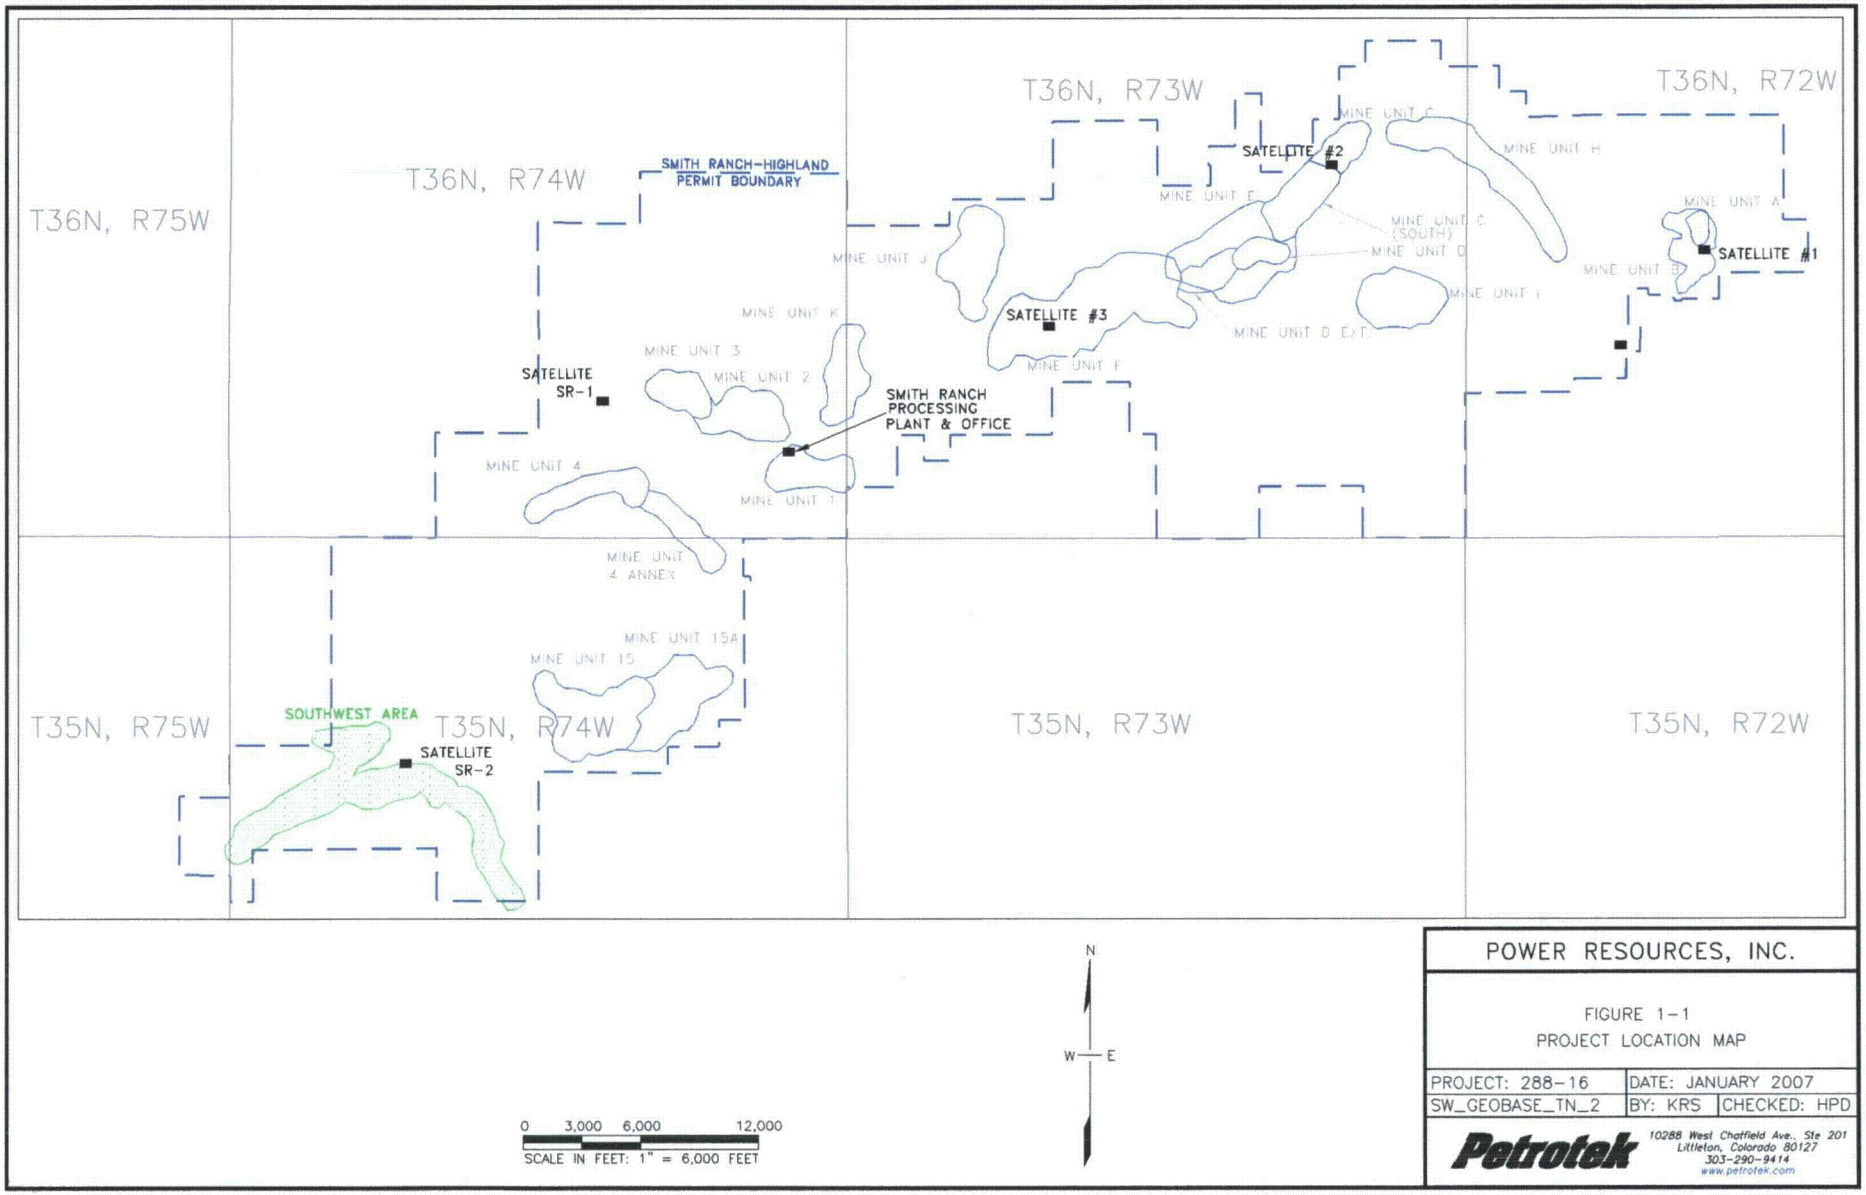

POWER RESOURCES, INC.

FIGURE 1-1
PROJECT LOCATION MAP

PROJECT: 288-16	DATE: JANUARY 2007	
SW_GEOBASE_TN_2	BY: KRS	CHECKED: HPD

Petrotek
10288 West Chatfield Ave., Ste 201
Littleton, Colorado 80127
303-290-9414
www.petrotek.com

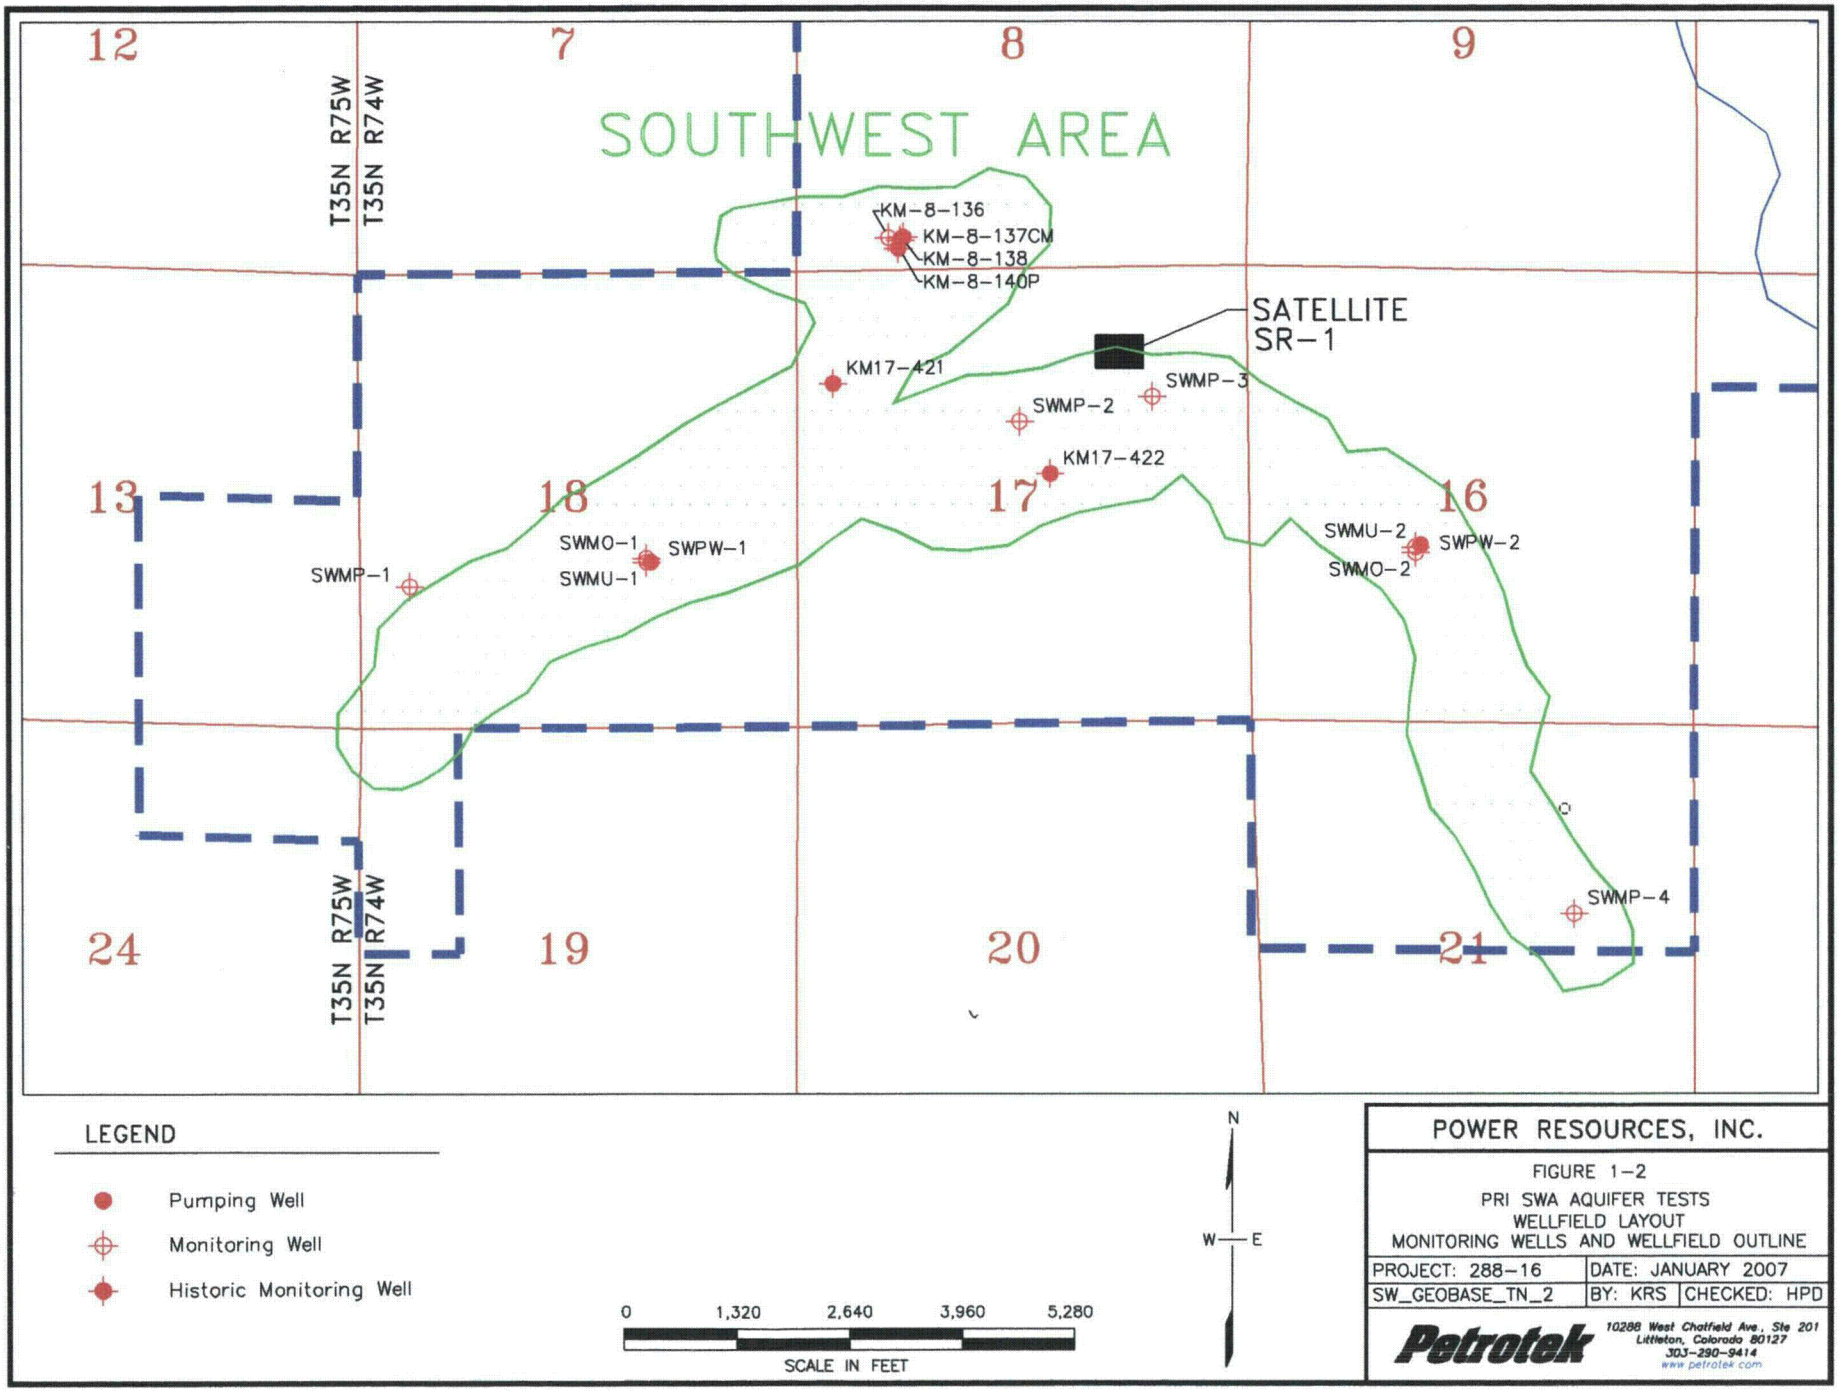
12
7
8
9
T35N R75W
T35N R74W
SOUTHWEST AREA
KM-8-136
KM-8-137CM
KM-8-138
KM-8-140P
SATELLITE
SR-1
KM17-421
SWMP-3
SWMP-2
KM17-422
13
18
17
16
SWMO-1
SWPW-1
SWMU-1
SWMP-1
SWMU-2
SWPW-2
SWMO-2
SWMP-4
24
19
20
21
T35N R75W
T35N R74W
LEGEND
Pumping Well
Monitoring Well
Historic Monitoring Well
0
1,320
2,640
3,960
5,280
SCALE IN FEET
N
W
E
POWER RESOURCES, INC.
FIGURE 1-2
PRI SWA AQUIFER TESTS
WELLFIELD LAYOUT
MONITORING WELLS AND WELLFIELD OUTLINE
PROJECT: 288-16
DATE: JANUARY 2007
SW_GEOBASE_TN_2
BY: KRS
CHECKED: HPD
Petrotek
10288 West Chatfield Ave., Ste 201
Littleton, Colorado 80127
303-290-9414
www.petrotek.com

M SAND

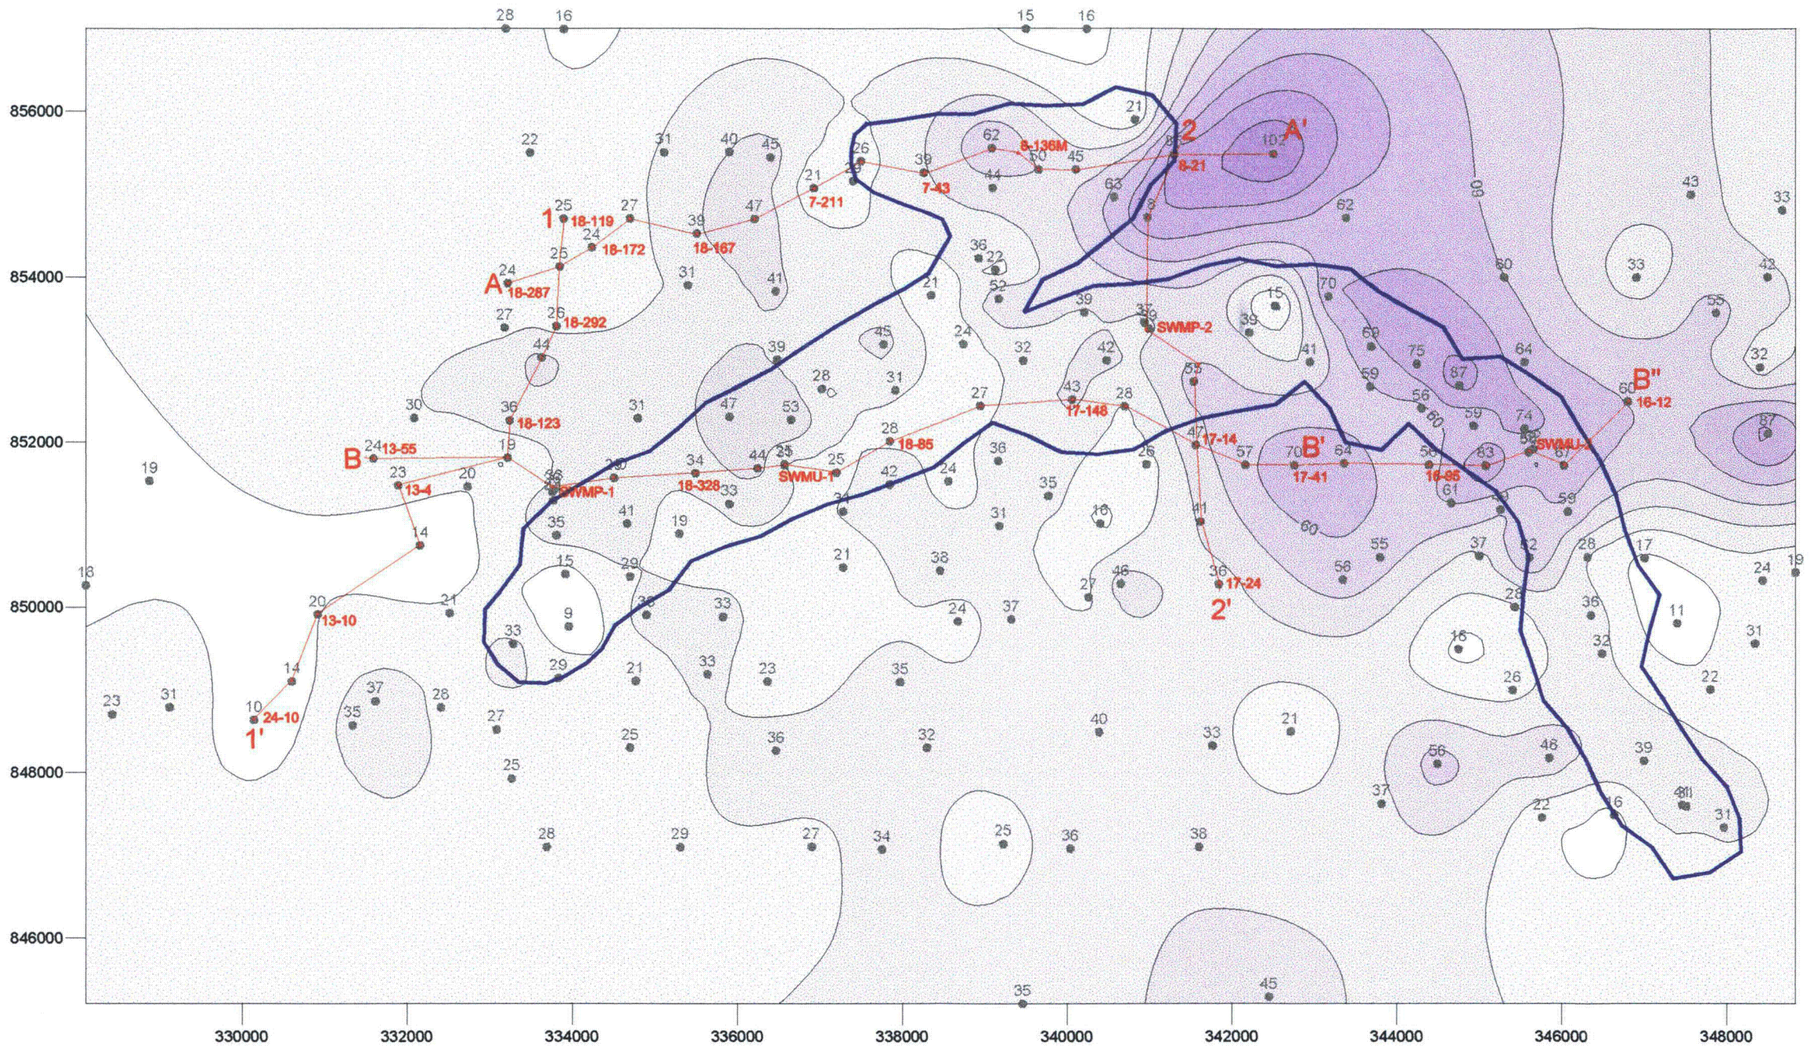

Cross Section Outline

Monitor Well Outline

Contour Line /w Thickness

10 20 30 40 50 60 70 80 90 100

0' 1000' 2000'

FIGURE 2-1

POWER RESOURCES, INC.

P.O. Box 1210 Glenrock, WY 82637 (307) 358-6541 (307) 235-1628

REVISIONS		
NO.	DATE	BY
1	01/23/07	B. Hend

SMITH RANCH-HIGHLAND URANIUM PROJECT
MINE UNIT SW PUMP TEST REPORT

ISOPACH MAP: OVERLYING M SAND
AND PROBABLE MONITOR RING

PORTIONS OF SECTIONS 7,8,16,17,18,19,20,21, T.35N., R.74W.
AND SECTIONS 13 & 24, T.35N., R.75W.

GEOL. BY: B.Hend	DATE: 7/20/06	APPR. BY: G.Kruse	DATE: 7/14/06	SHT NO.
ENG. BY:	DATE:	APPR. BY:	DATE:	
DRAFT. BY:	DATE:	SCALE:	FILE:	

L SHALE

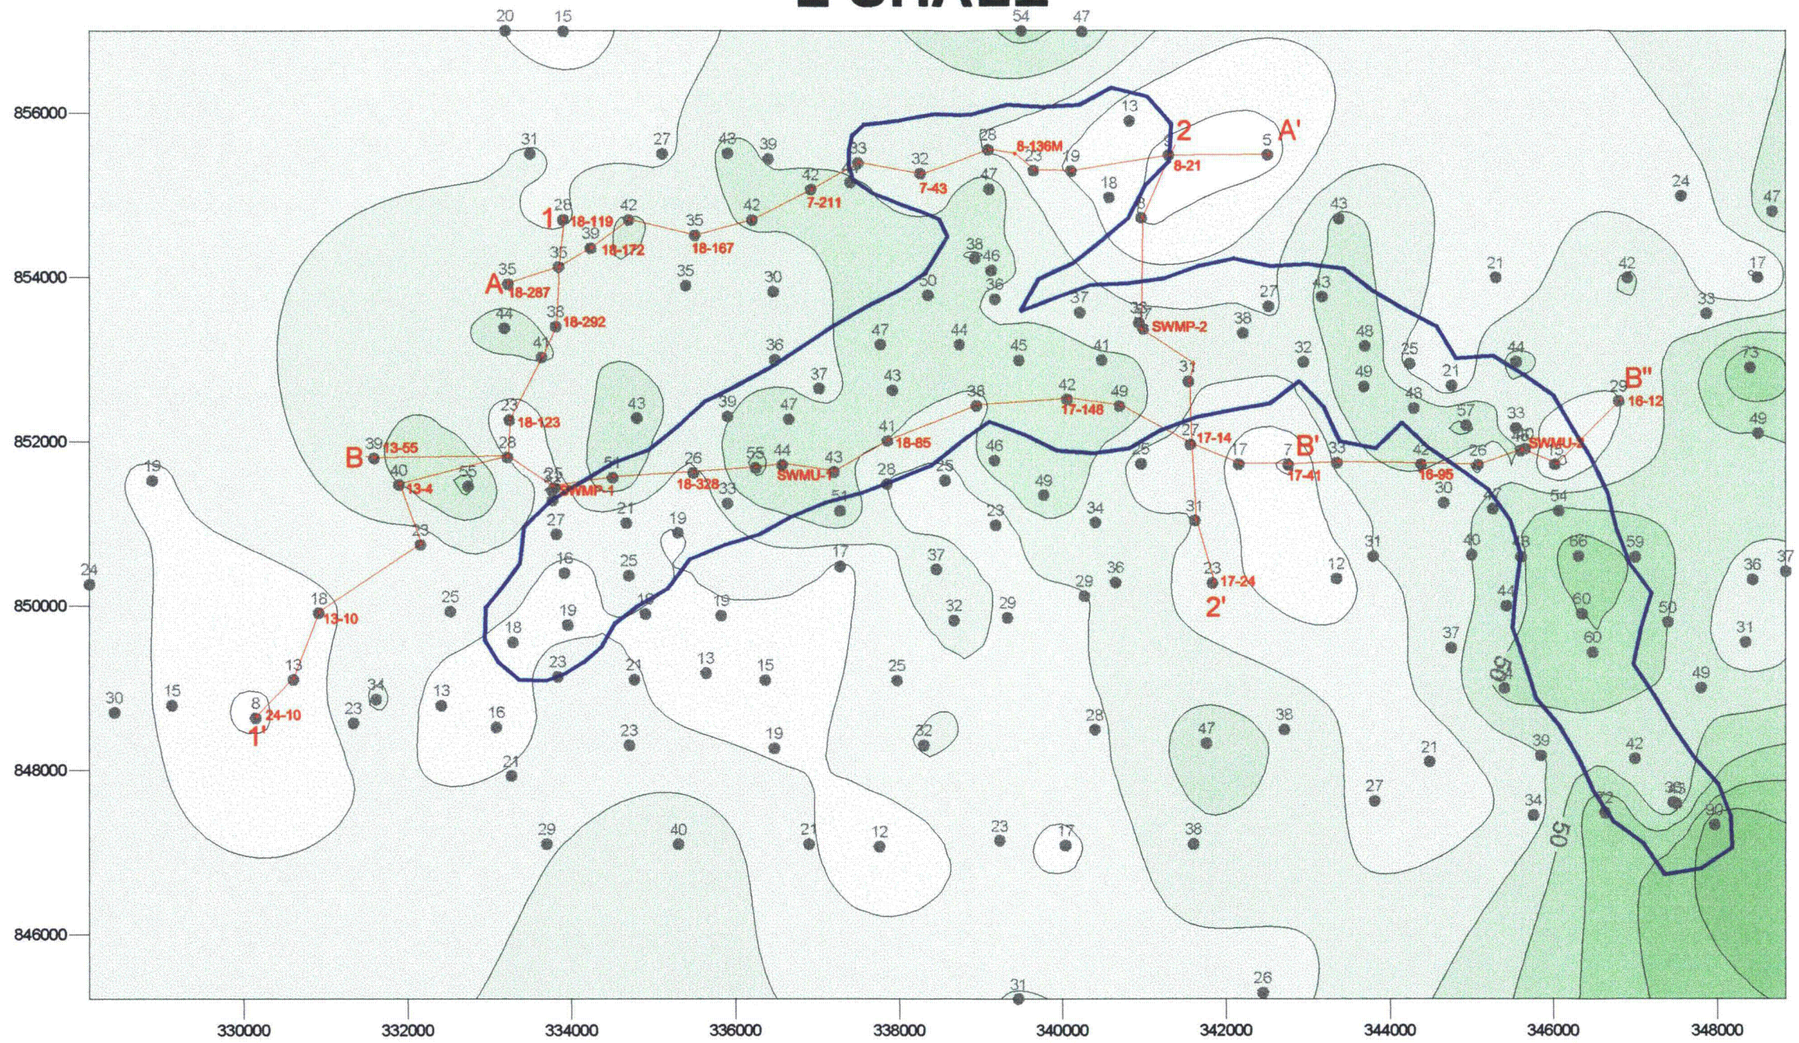

Cross Section Outline

Monitor Well Outline

Contour Line /w Thickness

FIGURE 2-2

POWER RESOURCES, INC.

P.O. Box 1210 Glenrock, WY 82637 (307) 358-6541 (307) 235-1628

SMITH RANCH-HIGHLAND URANIUM PROJECT
MINE UNIT SW PUMP TEST REPORT

ISOPACH MAP: L SHALE CONFINING UNIT AND PROBABLE MONITOR RING

PORTIONS OF SECTIONS 7,8,16,17,18,19,20,21, T.35N., R.74W. AND SECTIONS 13 & 24, T.35N., R.75W.

REVISIONS		
NO.	DATE	BY
1	01/23/07	B. Hend

GEOL. BY: B Hend	DATE: 7/20/06	APPR. BY: G Kruse	DATE: 7/14/06	SHT NO.	
ENG. BY:	DATE:	APPR. BY:	DATE:		
DRAFT. BY:	DATE:	SCALE:	FILE:		

NET K SAND

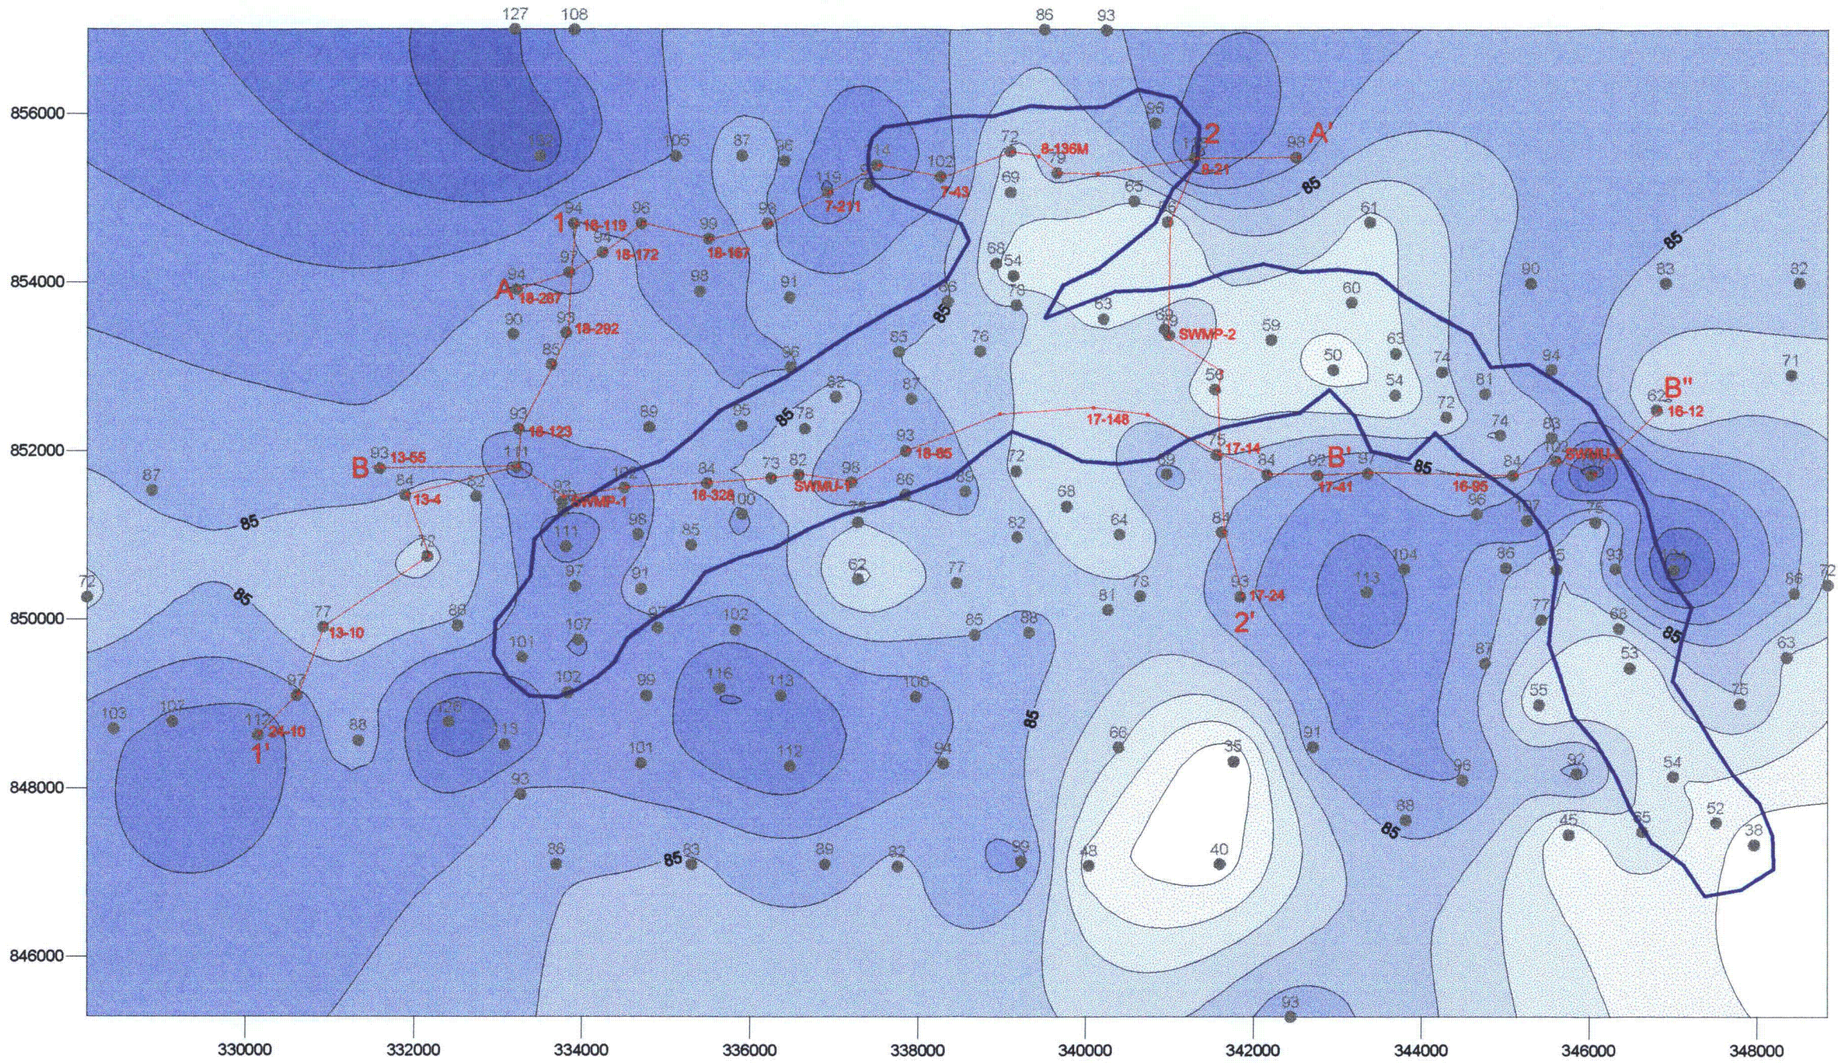

FIGURE 2-3

POWER RESOURCES, INC.
P.O. Box 1210 Glenrock, WY 82637 (307) 358-6541 (307) 235-1628

REVISIONS		
NO.	DATE	BY
1	01/23/07	B. Hend

SMITH RANCH-HIGHLAND URANIUM PROJECT
MINE UNIT SW PUMP TEST REPORT

ISOPACH MAP: PRODUCTION K SAND NET THICKNESS AND PROBABLE MONITOR RING

PORTIONS OF SECTIONS 7,8,16,17,18,19,20,21, T.35N., R.74W. AND SECTIONS 13 & 24, T.35N., R.75W.

GEOL. BY: B.Hend	DATE: 7/20/06	APPR. BY: G.Kruse	DATE: 7/14/06	SHT. NO.
ENG. BY:	DATE:	APPR. BY:	DATE:	
DRAFT. BY:	DATE:	SCALE:	FILE:	

J SHALE

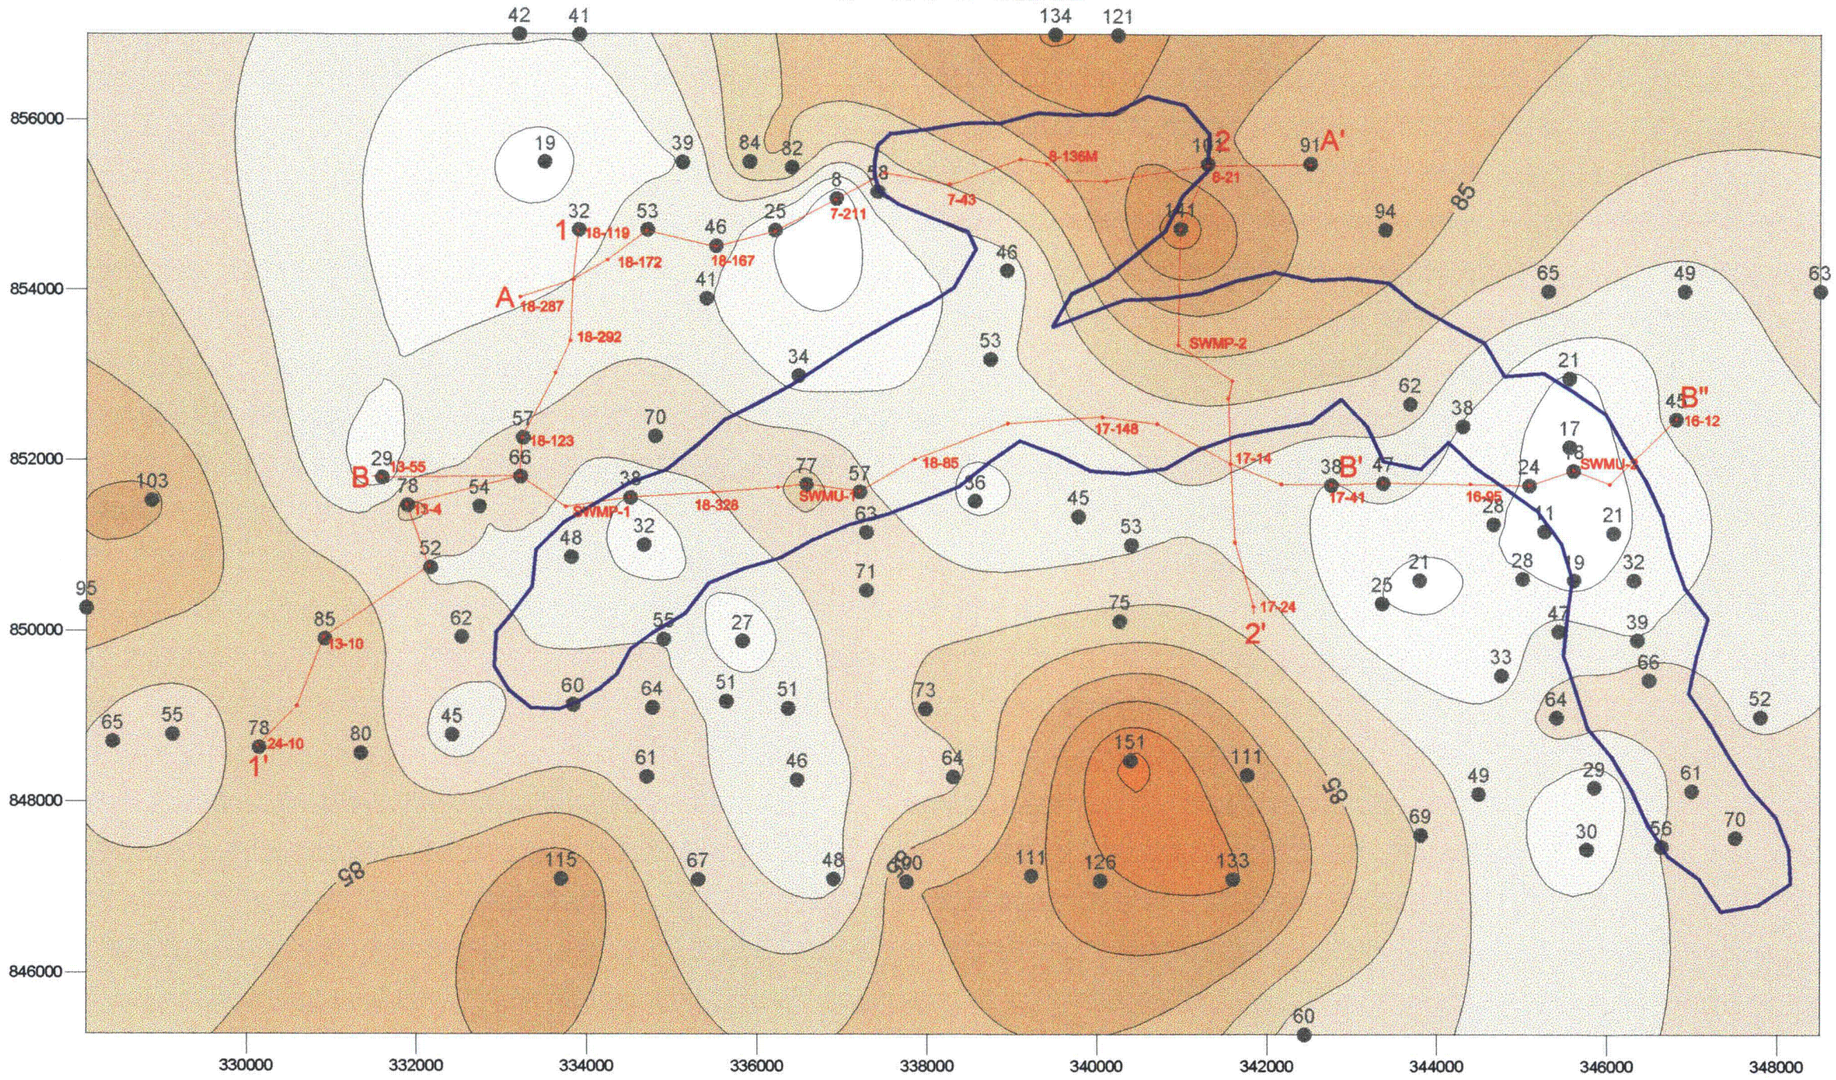

Cross Section Outline

Monitor Well Outline

—— 50 —— Contour Line /w Thickness

FIGURE 2-4

POWER RESOURCES, INC.

P.O. Box 1210 Glenrock, WY 82637 (307) 358-6541 (307) 235-1626

REVISIONS		
NO.	DATE	BY
1	01/23/07	B. Hend

SMITH RANCH-HIGHLAND URANIUM PROJECT
MINE UNIT SW PUMP TEST REPORT

ISOPACH MAP: J SHALE CONFINING UNIT
AND PROBABLE MONITOR RING

PORTIONS OF SECTIONS 7,8,16,17,18,19,20,21, T.35N., R.74W.
AND SECTIONS 13 & 24, T.35N., R.75W.

GEOL. BY: B.Hend	DATE: 7/20/06	APPR. BY: G.Kruse	DATE: 7/14/06	SHT NO.
ENG. BY:	DATE:	APPR. BY:	DATE:	
DRAFT. BY:	DATE:	SCALE:	FILE:	

I SAND

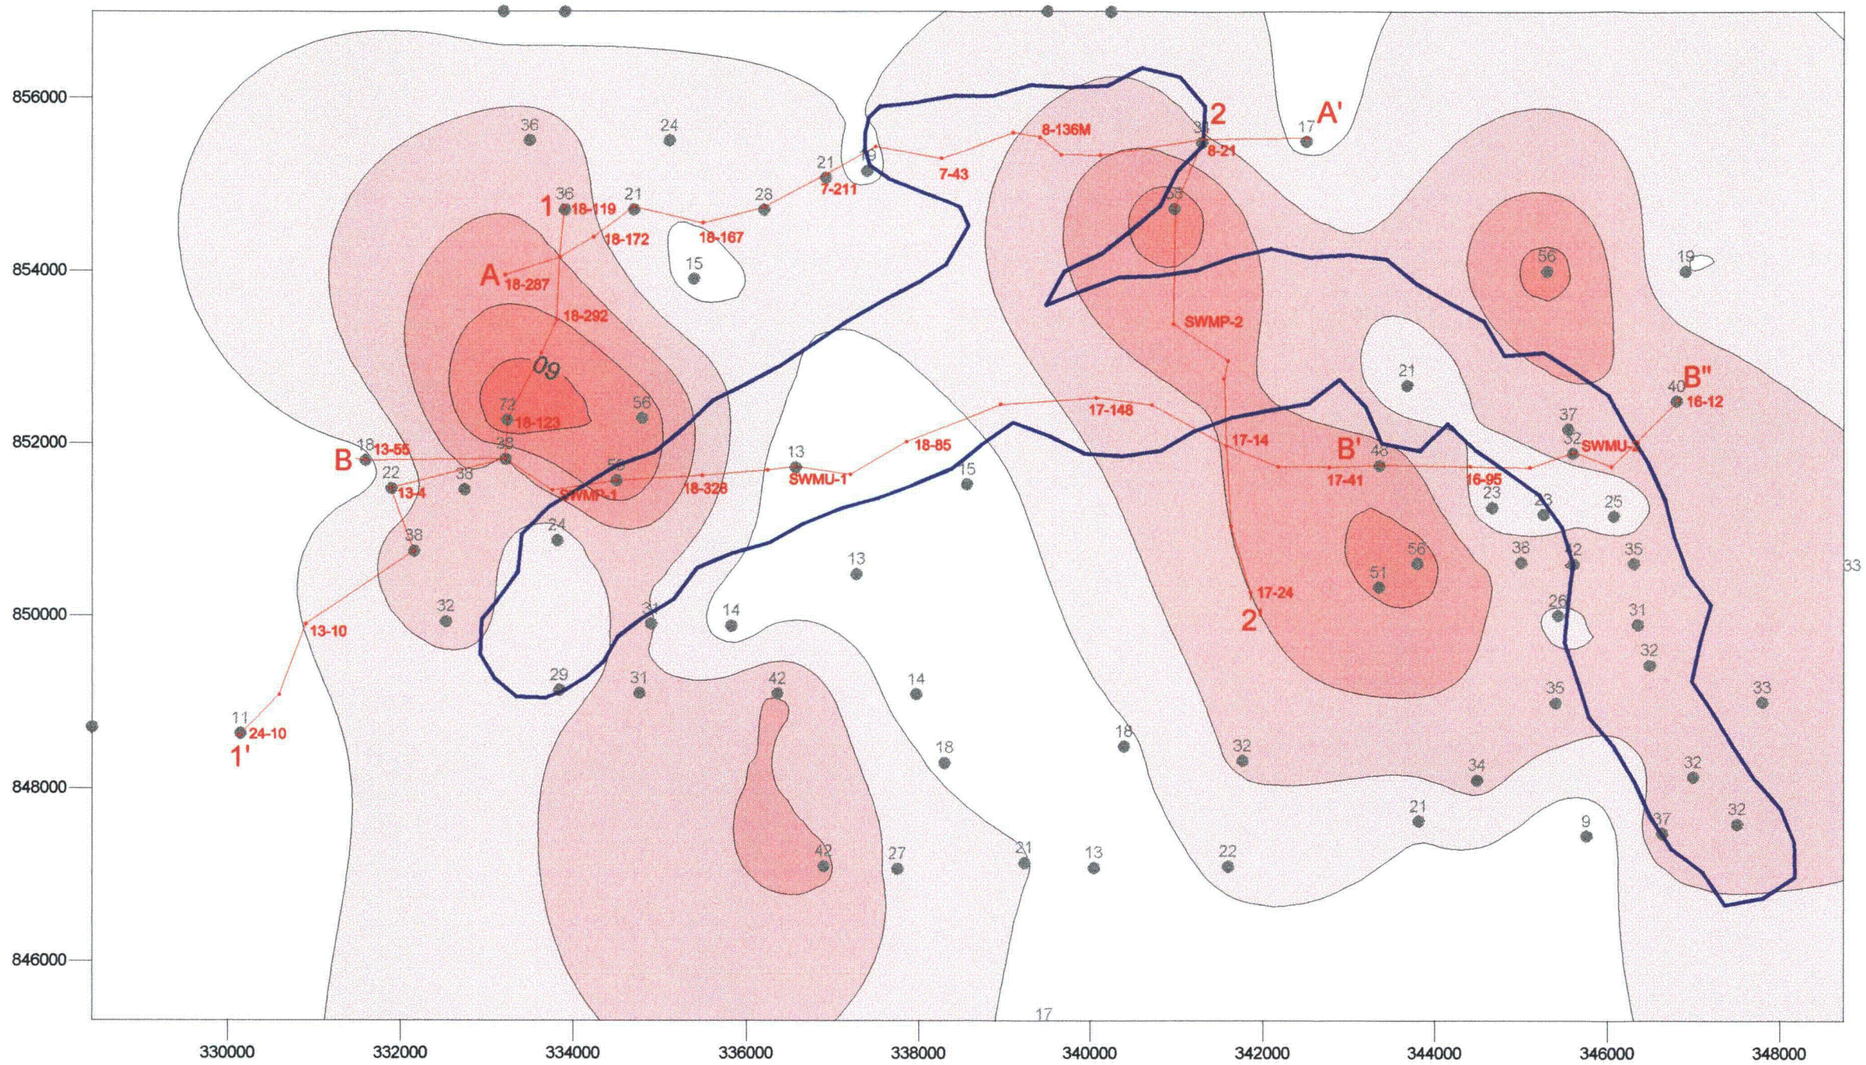

Cross Section Outline

Monitor Well Outline

Contour Line /w Thickness

FIGURE 2-5

POWER RESOURCES, INC.

P.O. Box 1210 Glenrock, WY 82637 (307) 358-6541 (307) 235-1628

SMITH RANCH-HIGHLAND URANIUM PROJECT
MINE UNIT SW PUMP TEST REPORT

ISOPACH MAP: UNDERLYING I SAND AND PROBABLE MONITOR RING

PORTIONS OF SECTIONS 7,8,16,17,18,19,20,21, T.35N., R.74W. AND SECTIONS 13 & 24, T.35N., R.75W.

REVISIONS		
NO.	DATE	BY
1	01/23/07	B.Hend

GEOL. BY: B.Hend	DATE: 7/20/06	APPR. BY: G.Kruse	DATE: 7/14/06	SHT NO.
ENG. BY:	DATE:	APPR. BY:	DATE:	
DRAFT. BY:	DATE:	SCALE:	FILE:	

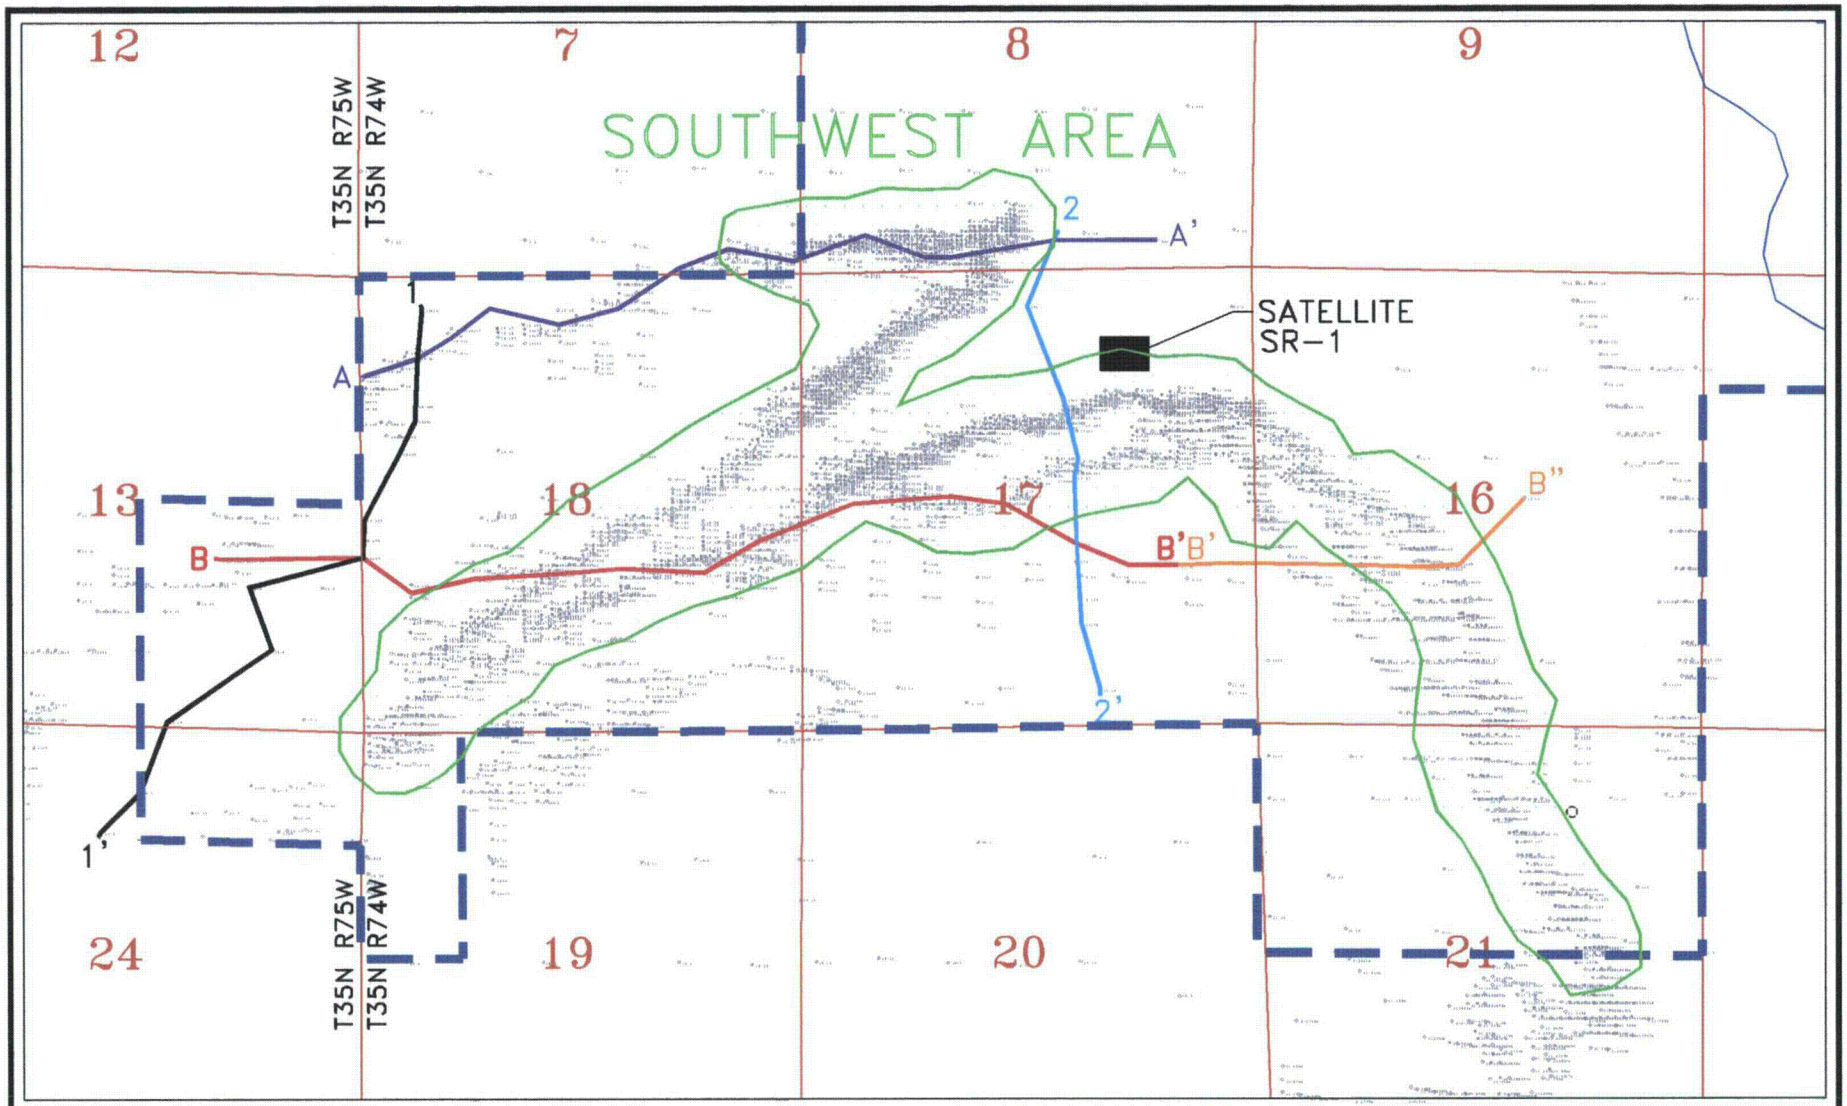

LEGEND

Exploration Hole and Number

N
W — E

0 1,320 2,640 3,960 5,280
SCALE IN FEET

POWER RESOURCES, INC.

FIGURE 2-6
PRI SWA AQUIFER TESTS
CROSS SECTION LOCATION MAP

PROJECT: 288-16	DATE: JANUARY 2007	
SW_GEOBASE_TN_2	BY: KRS	CHECKED: HPD

Petrotek
10288 West Chatfield Ave., Ste 201
Littleton, Colorado 80127
303-290-9414
www.petrotek.com

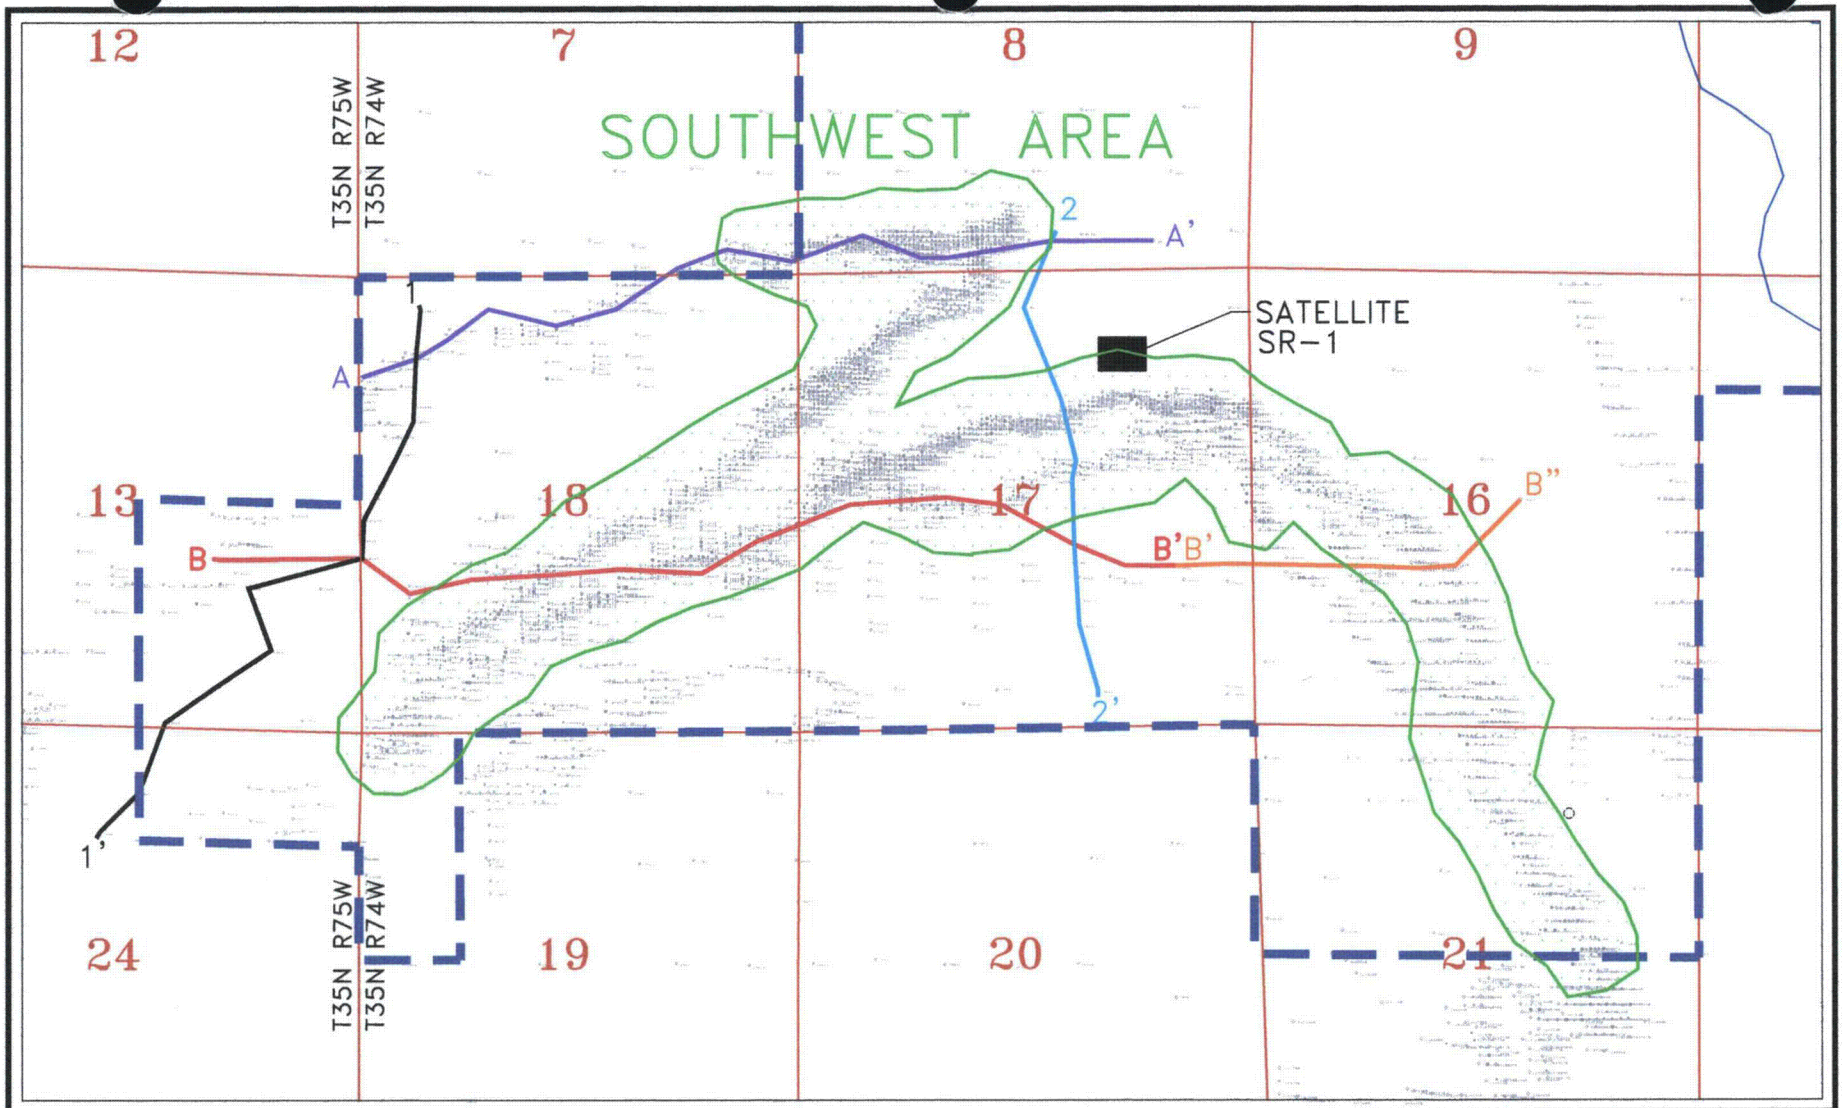

LEGEND

○ Exploration Hole and Number

N
W — E

0 1,320 2,640 3,960 5,280

SCALE IN FEET

POWER RESOURCES, INC.

FIGURE 2-6
PRI SWA AQUIFER TESTS
CROSS SECTION LOCATION MAP

PROJECT: 288-16	DATE: JANUARY 2007	
SW_GEOBASE_TN_2	BY: KRS	CHECKED: HPD

Petrotek
10288 West Chatfield Ave., Ste 201
Littleton, Colorado 80127
303-290-9414
www.petrotek.com

THIS PAGE IS AN OVERSIZED DRAWING OR FIGURE,

THAT CAN BE VIEWED AT THE RECORD TITLED:

"FIGURE 2-7
MINE UNIT SW
STRATIGRAPHIC CROSS SECTION
B-B', LOOKING NORTH.
SECTION 13-35-75, 18-35-74,
& 17-35-74"

WITHIN THIS PACKAGE... OR

D-01

THIS PAGE IS AN OVERSIZED DRAWING OR FIGURE,

THAT CAN BE VIEWED AT THE RECORD TITLED:

"FIGURE 2-8
MINE UNIT SW
STRATIGRAPHIC CROSS SECTION
B'-B", LOOKING NORTH.
SECTION 16-35-74 & 17-35-74"

WITHIN THIS PACKAGE... OR

D-02

THIS PAGE IS AN OVERSIZED DRAWING OR FIGURE,

THAT CAN BE VIEWED AT THE RECORD TITLED:

"FIGURE 2-9
MINE UNIT SW
STRATIGRAPHIC CROSS SECTION
A-A', LOOKING NORTH.
SECTIONS 18-35-74, 07-35-74
& 08-35-74"

WITHIN THIS PACKAGE... OR

D-03

THIS PAGE IS AN OVERSIZED DRAWING OR FIGURE,

THAT CAN BE VIEWED AT THE RECORD TITLED:

"FIGURE 2-10
MINE UNIT SW
STRATIGRAPHIC CROSS SECTION
1-1', LOOKING EAST.
18-35-74, 13-35-75
& 24-35-75"

WITHIN THIS PACKAGE... OR

D-04

THIS PAGE IS AN OVERSIZED DRAWING OR FIGURE,

THAT CAN BE VIEWED AT THE RECORD TITLED:

"FIGURE 2-11
MINE UNIT SW
STRATIGRAPHIC CROSS SECTION
2-2', LOOKING EAST.
SECTION 08-35-74 & 17-35-74"

WITHIN THIS PACKAGE... OR

D-05

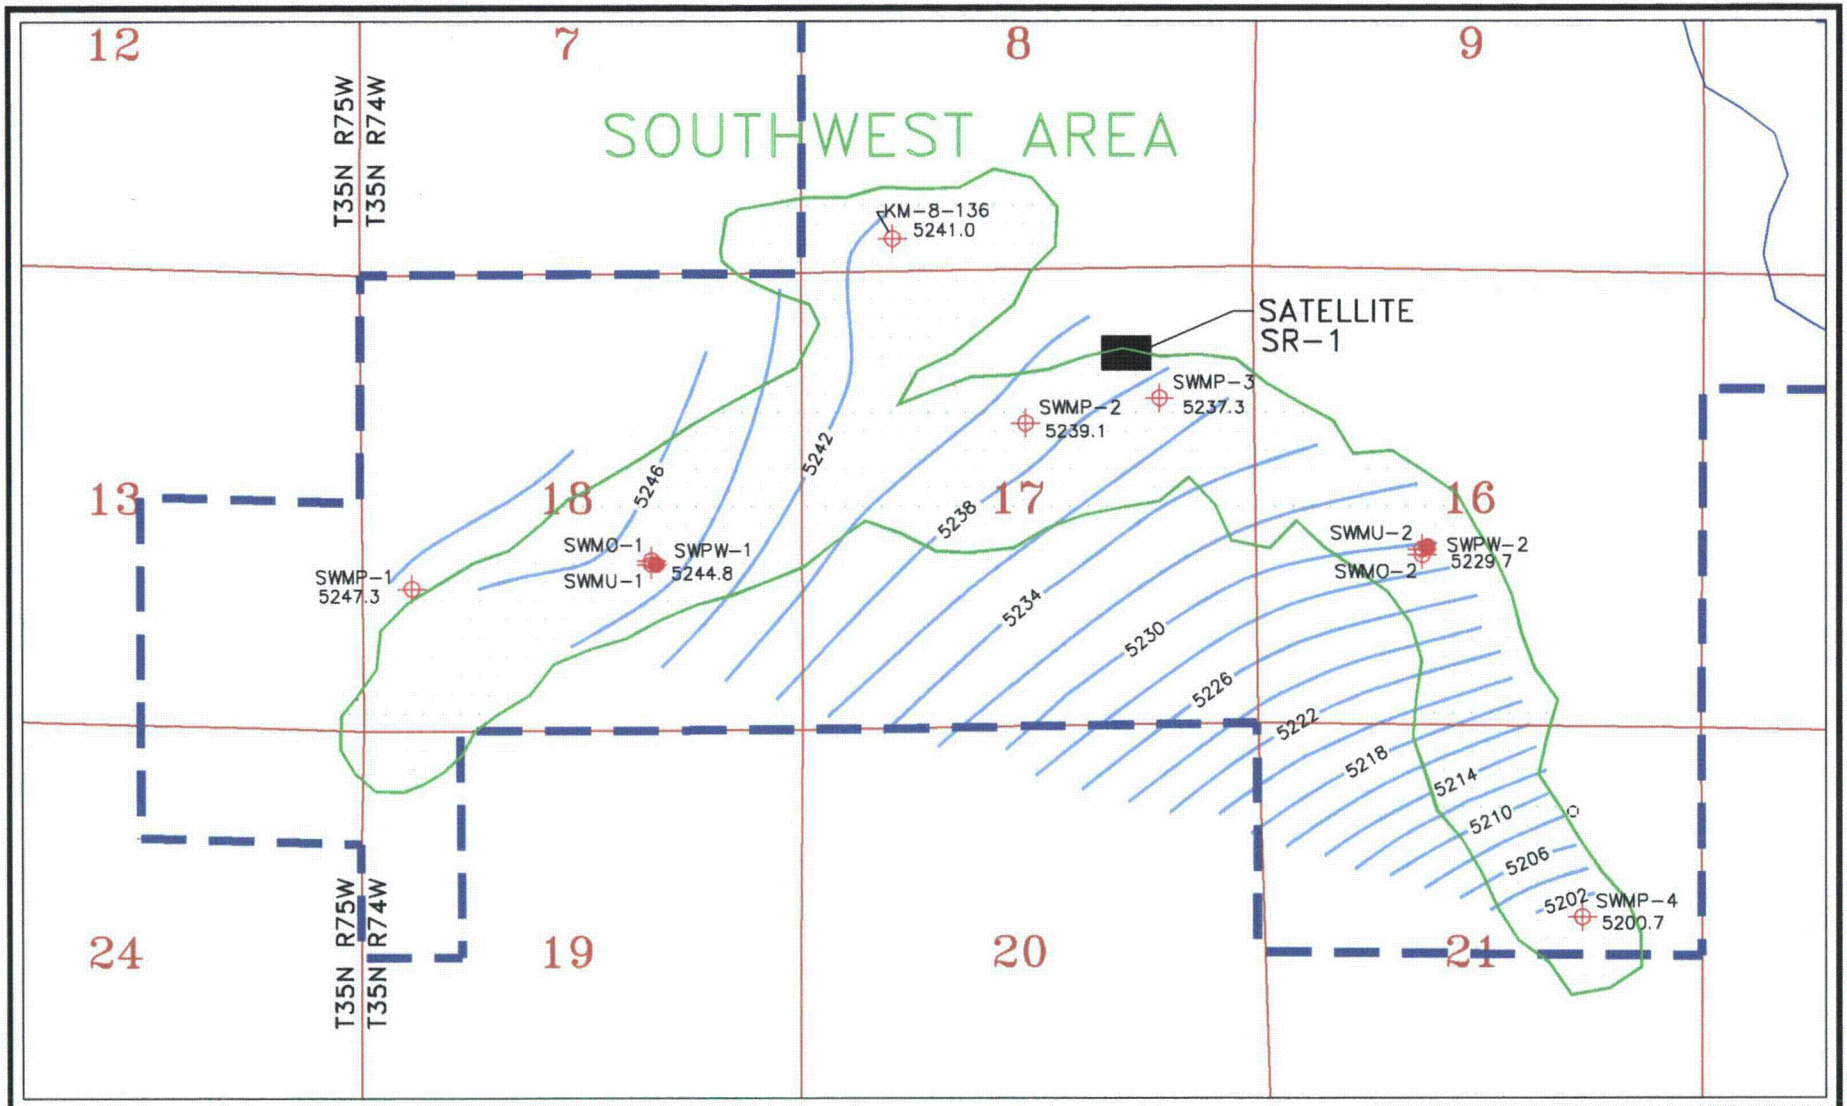

LEGEND

- Pumping Well
- Monitoring Well
- 5240 Potentiometric Surface (feet AMSL)

0 1,320 2,640 3,960 5,280

SCALE IN FEET

N

W E

POWER RESOURCES, INC.

FIGURE 4-1

PRI SWA AQUIFER TESTS
BACKGROUND POTENTIOMETRIC SURFACE
SEPTEMBER 07, 2006

PROJECT: 288-16	DATE: JANUARY 2007	
SW_GEOBASE_TN_2	BY: KRS	CHECKED: HPD

Petrotek
10288 West Chatfield Ave., Ste 201
Littleton, Colorado 80127
303-290-9414
www.petrotek.com

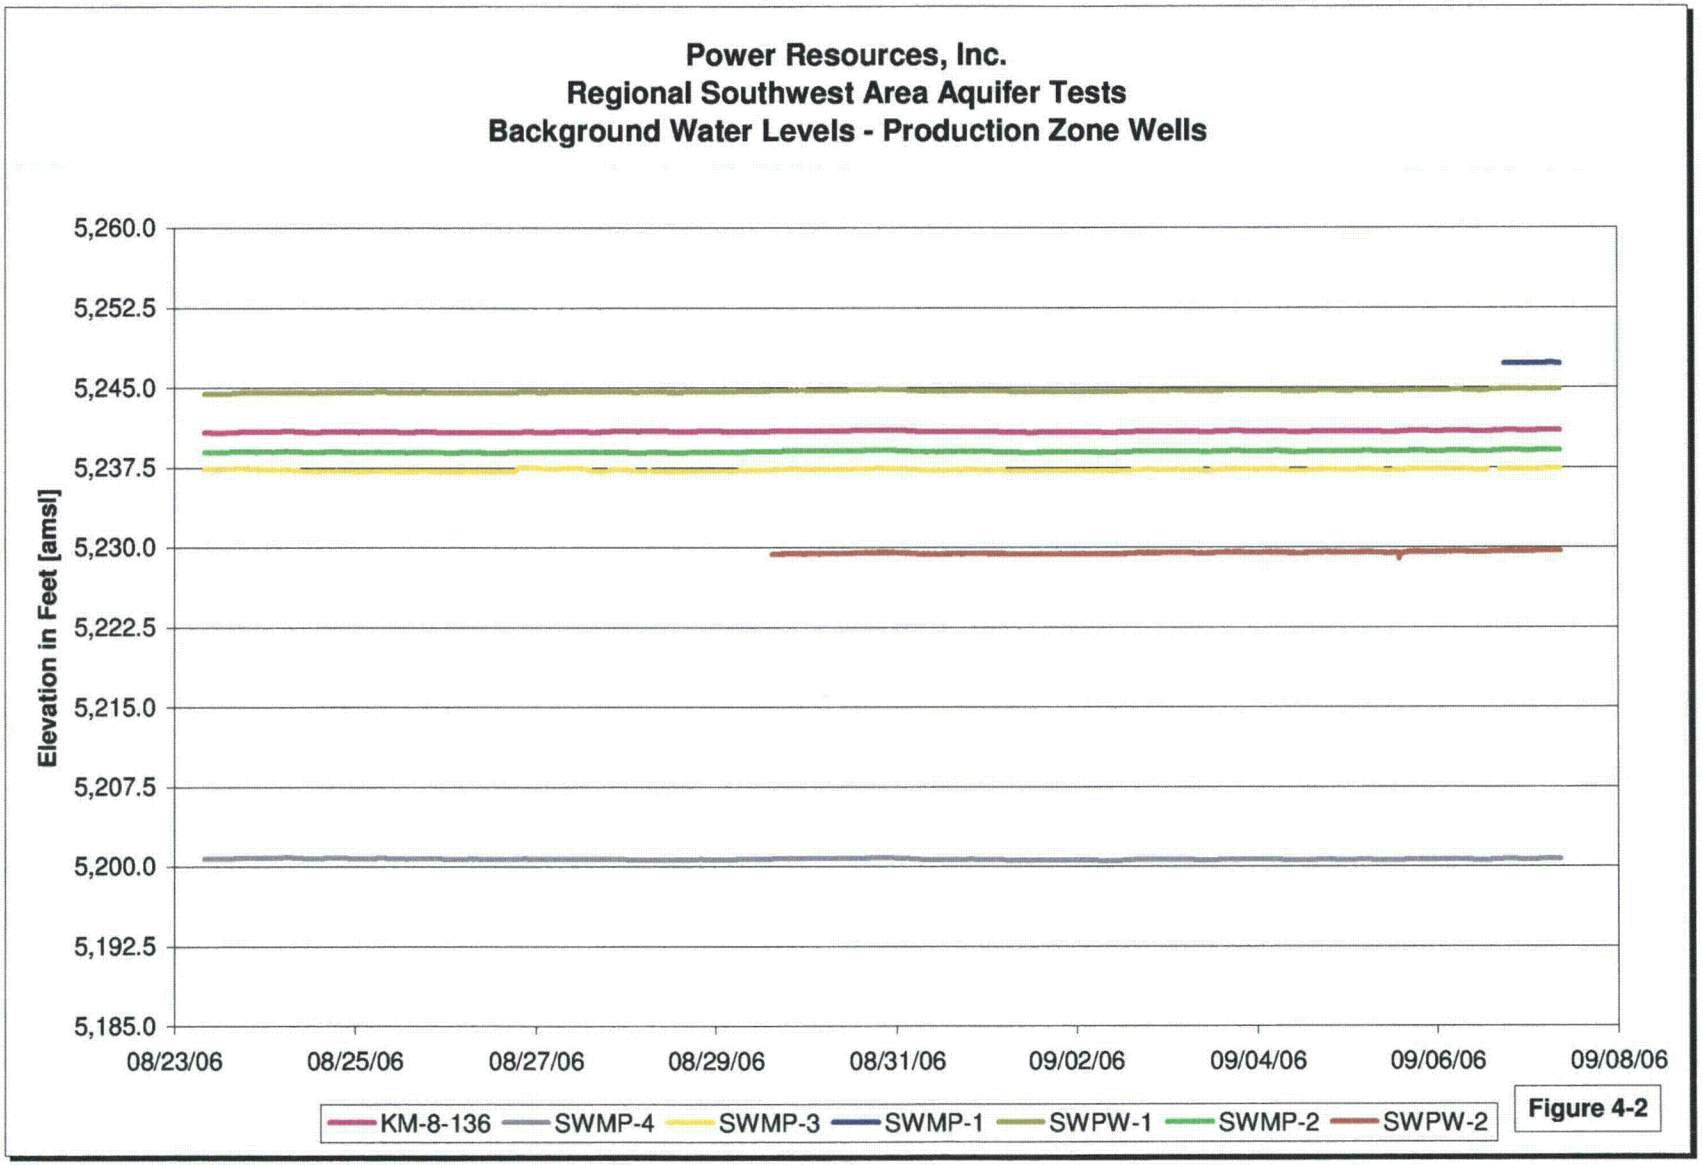
Power Resources, Inc.
Regional Southwest Area Aquifer Tests
Background Water Levels - Production Zone Wells
Elevation in Feet [amsl]
5,260.0
5,252.5
5,245.0
5,237.5
5,230.0
5,222.5
5,215.0
5,207.5
5,200.0
5,192.5
5,185.0
08/23/06
08/25/06
08/27/06
08/29/06
08/31/06
09/02/06
09/04/06
09/06/06
09/08/06
KM-8-136
SWMP-4
SWMP-3
SWMP-1
SWPW-1
SWMP-2
SWPW-2

Figure 4-2

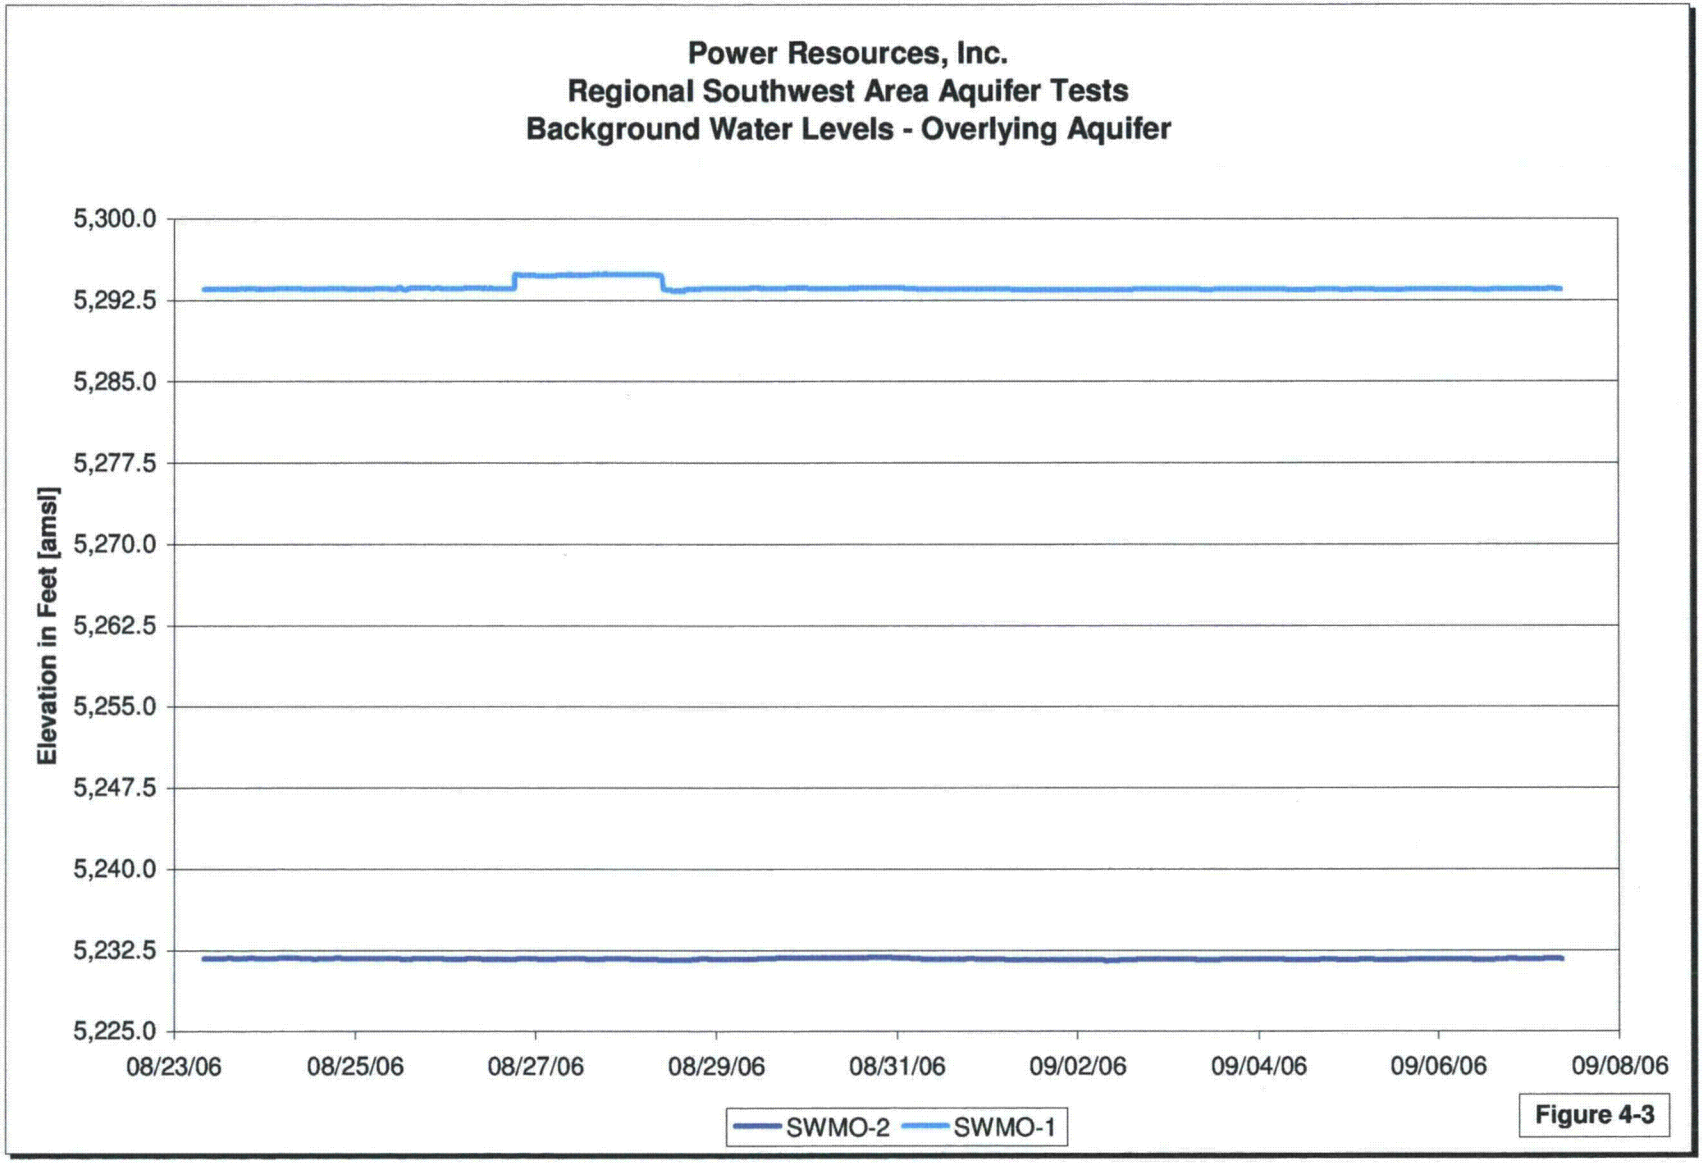
Power Resources, Inc.
Regional Southwest Area Aquifer Tests
Background Water Levels - Overlying Aquifer
Elevation in Feet [amsl]
5,300.0
5,292.5
5,285.0
5,277.5
5,270.0
5,262.5
5,255.0
5,247.5
5,240.0
5,232.5
5,225.0
08/23/06
08/25/06
08/27/06
08/29/06
08/31/06
09/02/06
09/04/06
09/06/06
09/08/06
SWMO-2
SWMO-1

Figure 4-3

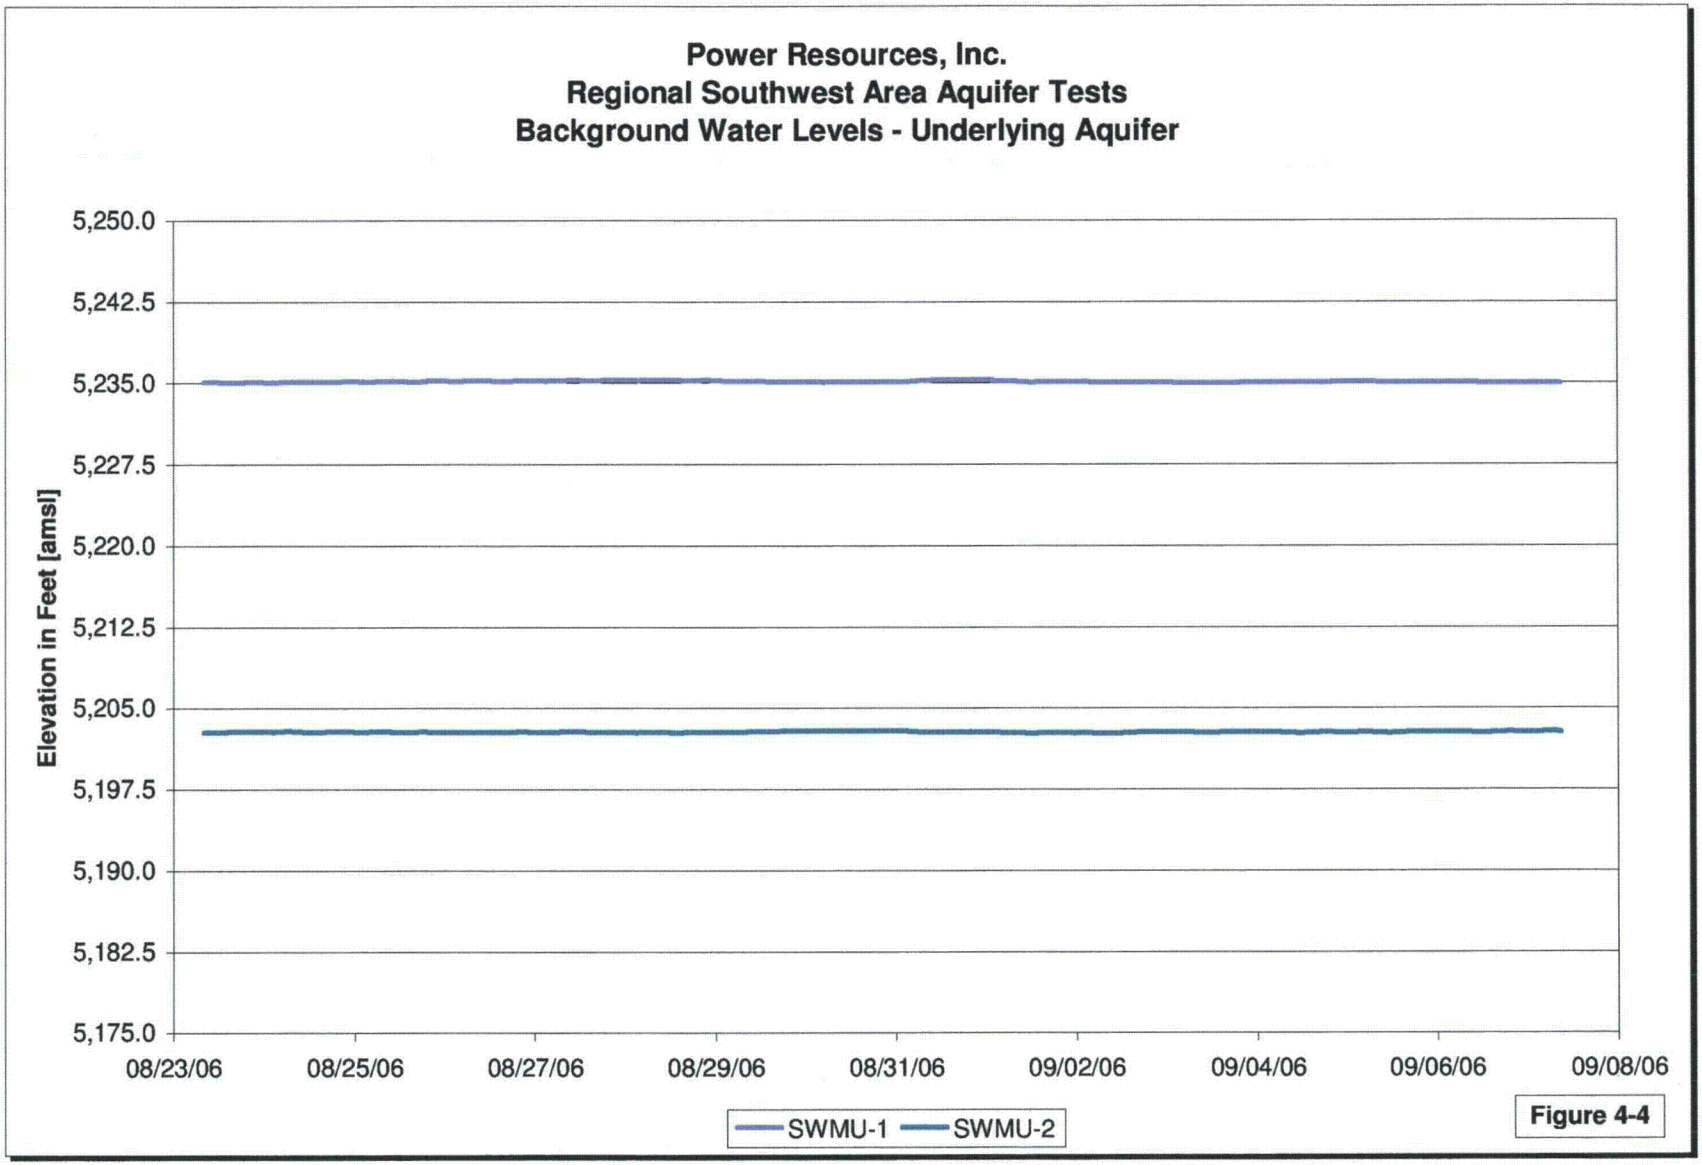
Power Resources, Inc.
Regional Southwest Area Aquifer Tests
Background Water Levels - Underlying Aquifer
Elevation in Feet [amsl]
5,250.0
5,242.5
5,235.0
5,227.5
5,220.0
5,212.5
5,205.0
5,197.5
5,190.0
5,182.5
5,175.0
08/23/06
08/25/06
08/27/06
08/29/06
08/31/06
09/02/06
09/04/06
09/06/06
09/08/06
SWMU-1
SWMU-2

Figure 4-4

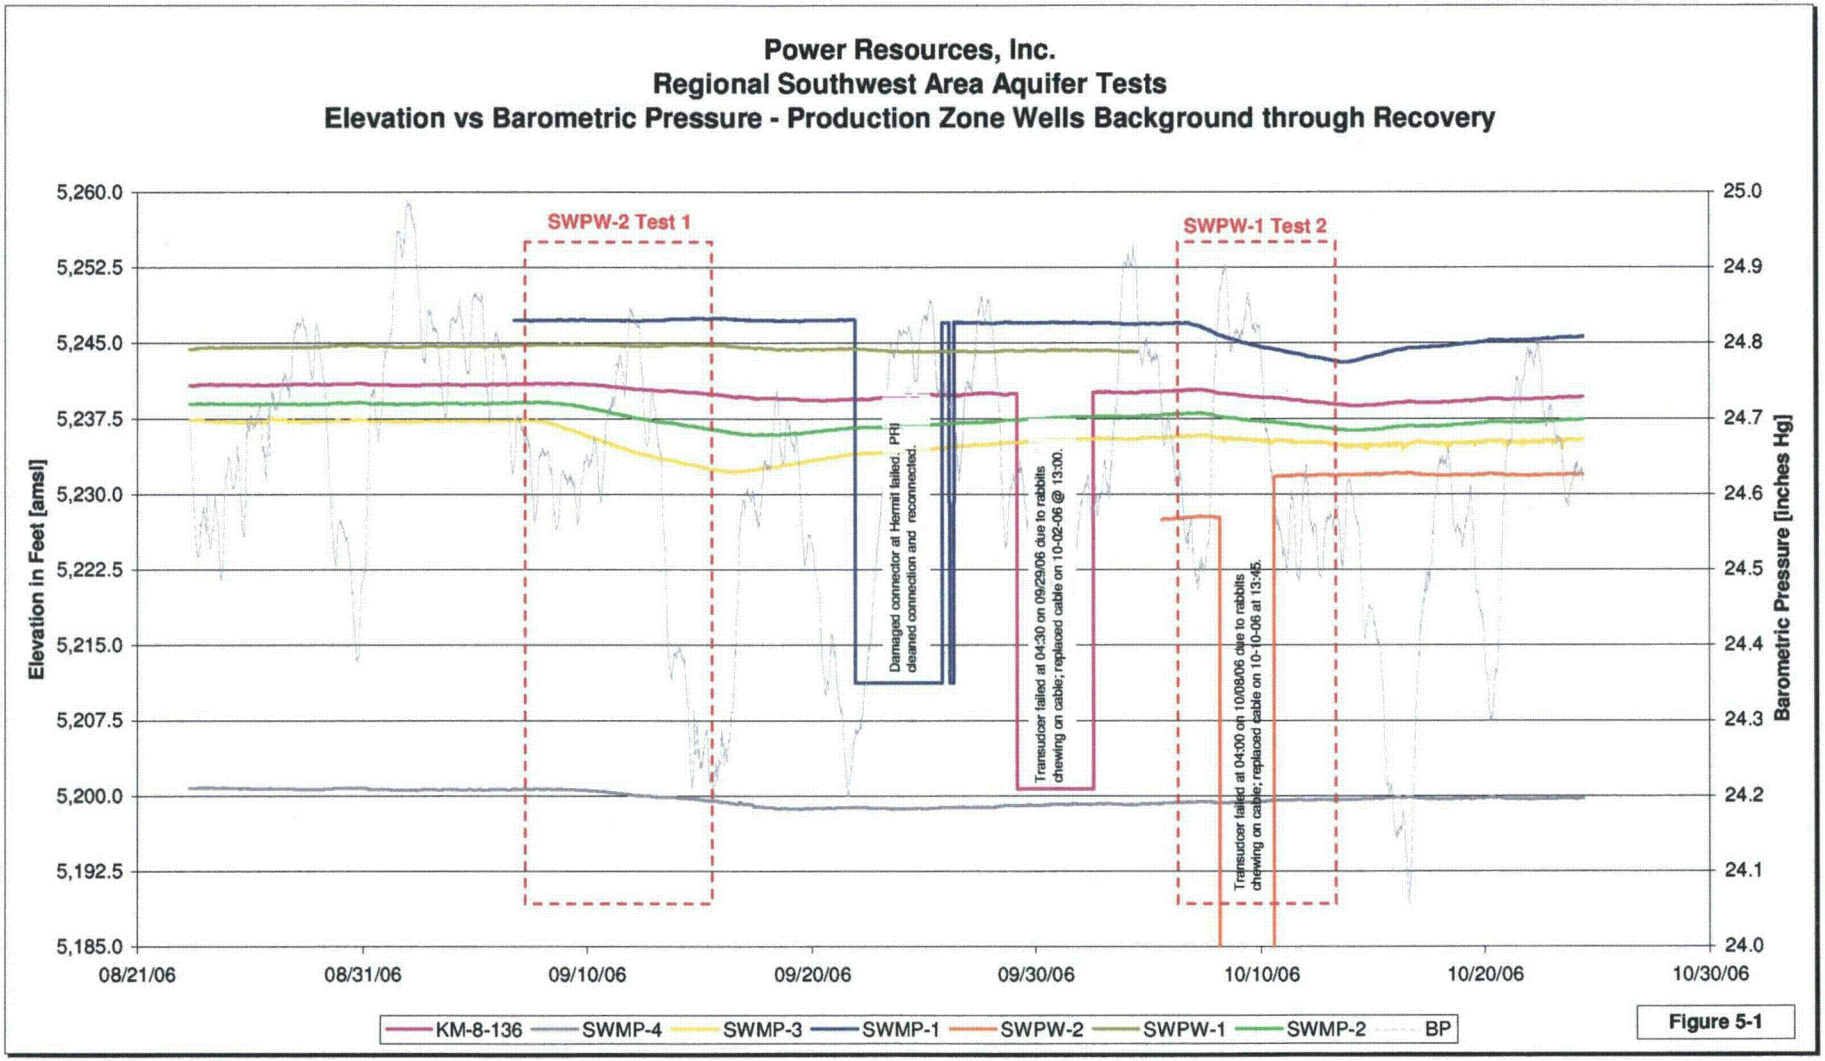
Power Resources, Inc.
Regional Southwest Area Aquifer Tests
Elevation vs Barometric Pressure - Production Zone Wells Background through Recovery
SWPW-2 Test 1
SWPW-1 Test 2
Damaged connector at Hermit failed. PRI cleaned connection and reconnected.
Transducer failed at 04:30 on 09/29/06 due to rabbits chewing on cable; replaced cable on 10-02-06 @ 13:00.
Transducer failed at 04:00 on 10/08/06 due to rabbits chewing on cable; replaced cable on 10-10-06 at 13:45.
Elevation in Feet [amsl]
Barometric Pressure [inches Hg]
5,260.0
5,252.5
5,245.0
5,237.5
5,230.0
5,222.5
5,215.0
5,207.5
5,200.0
5,192.5
5,185.0
25.0
24.9
24.8
24.7
24.6
24.5
24.4
24.3
24.2
24.1
24.0
08/21/06
08/31/06
09/10/06
09/20/06
09/30/06
10/10/06
10/20/06
10/30/06
KM-8-136
SWMP-4
SWMP-3
SWMP-1
SWPW-2
SWPW-1
SWMP-2
BP

Figure 5-1

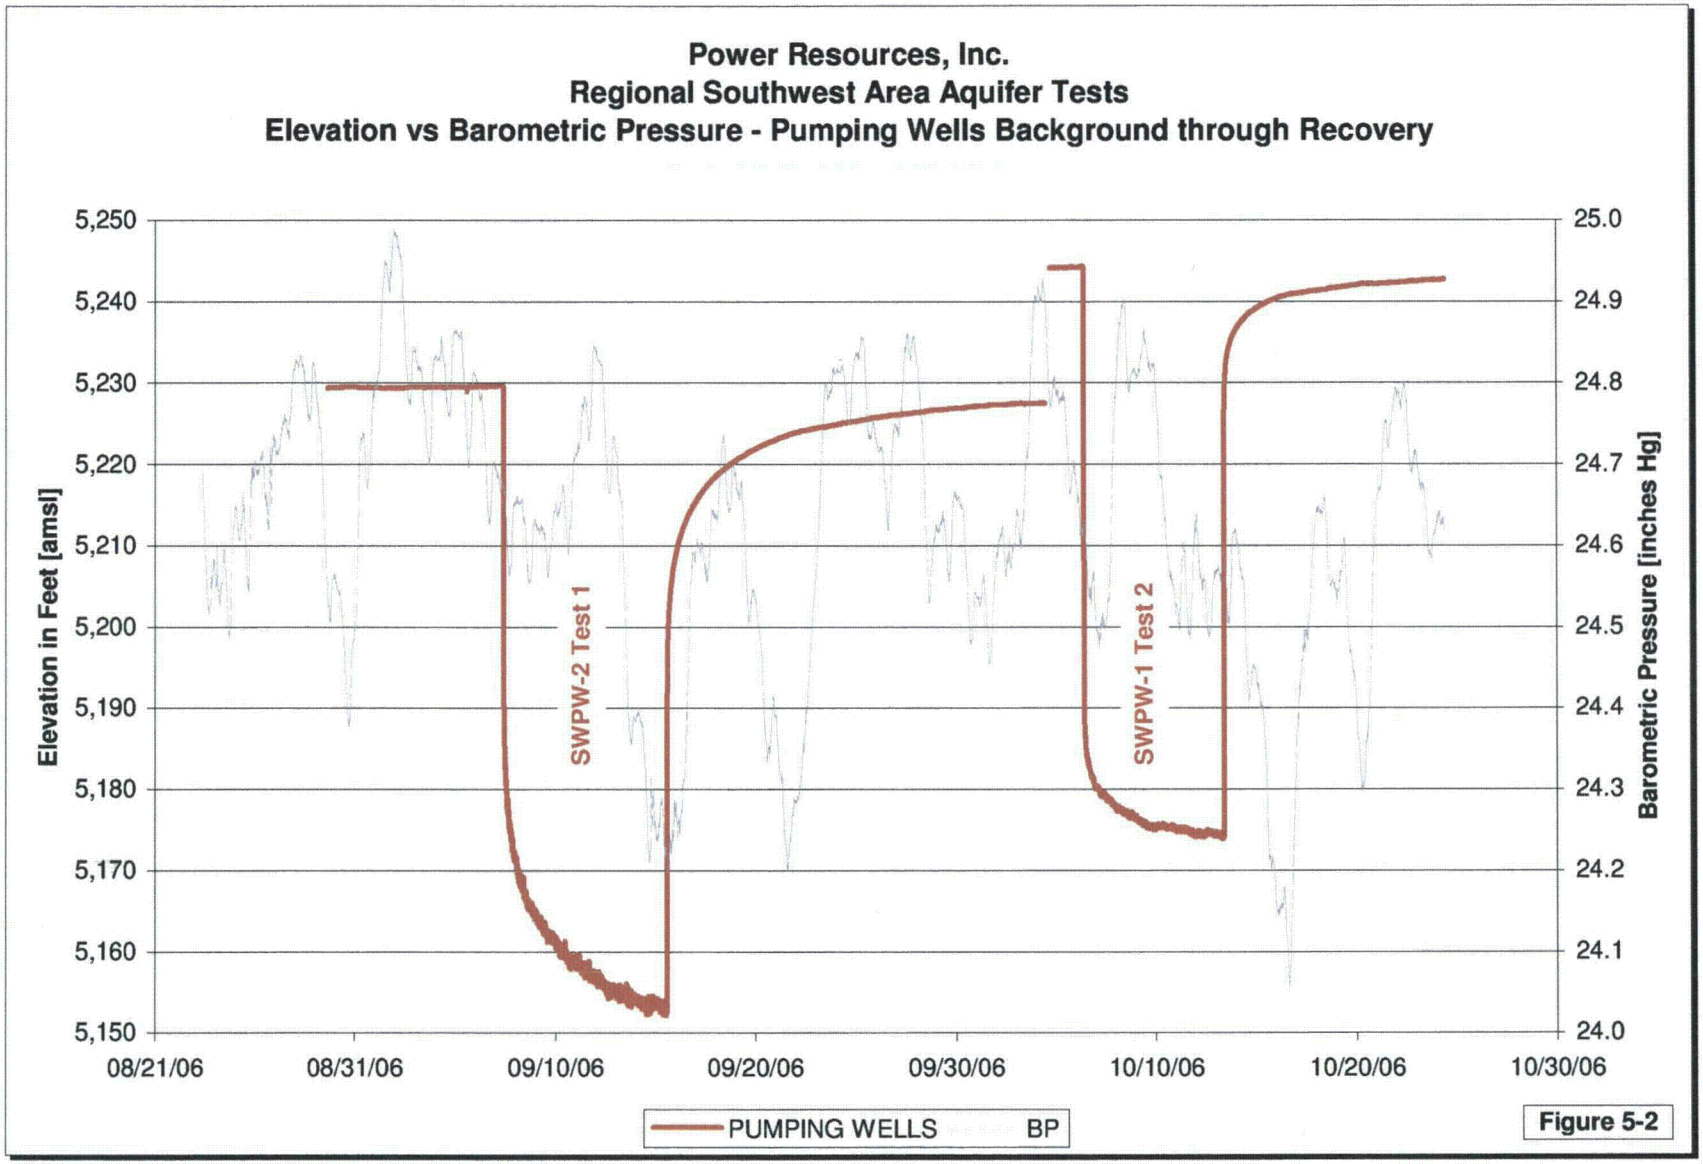
Power Resources, Inc.
Regional Southwest Area Aquifer Tests
Elevation vs Barometric Pressure - Pumping Wells Background through Recovery
Elevation in Feet [amsl]
5,250
5,240
5,230
5,220
5,210
5,200
5,190
5,180
5,170
5,160
5,150
Barometric Pressure [inches Hg]
25.0
24.9
24.8
24.7
24.6
24.5
24.4
24.3
24.2
24.1
24.0
08/21/06
08/31/06
09/10/06
09/20/06
09/30/06
10/10/06
10/20/06
10/30/06
SWPW-2 Test 1
SWPW-1 Test 2
PUMPING WELLS
BP

Figure 5-2

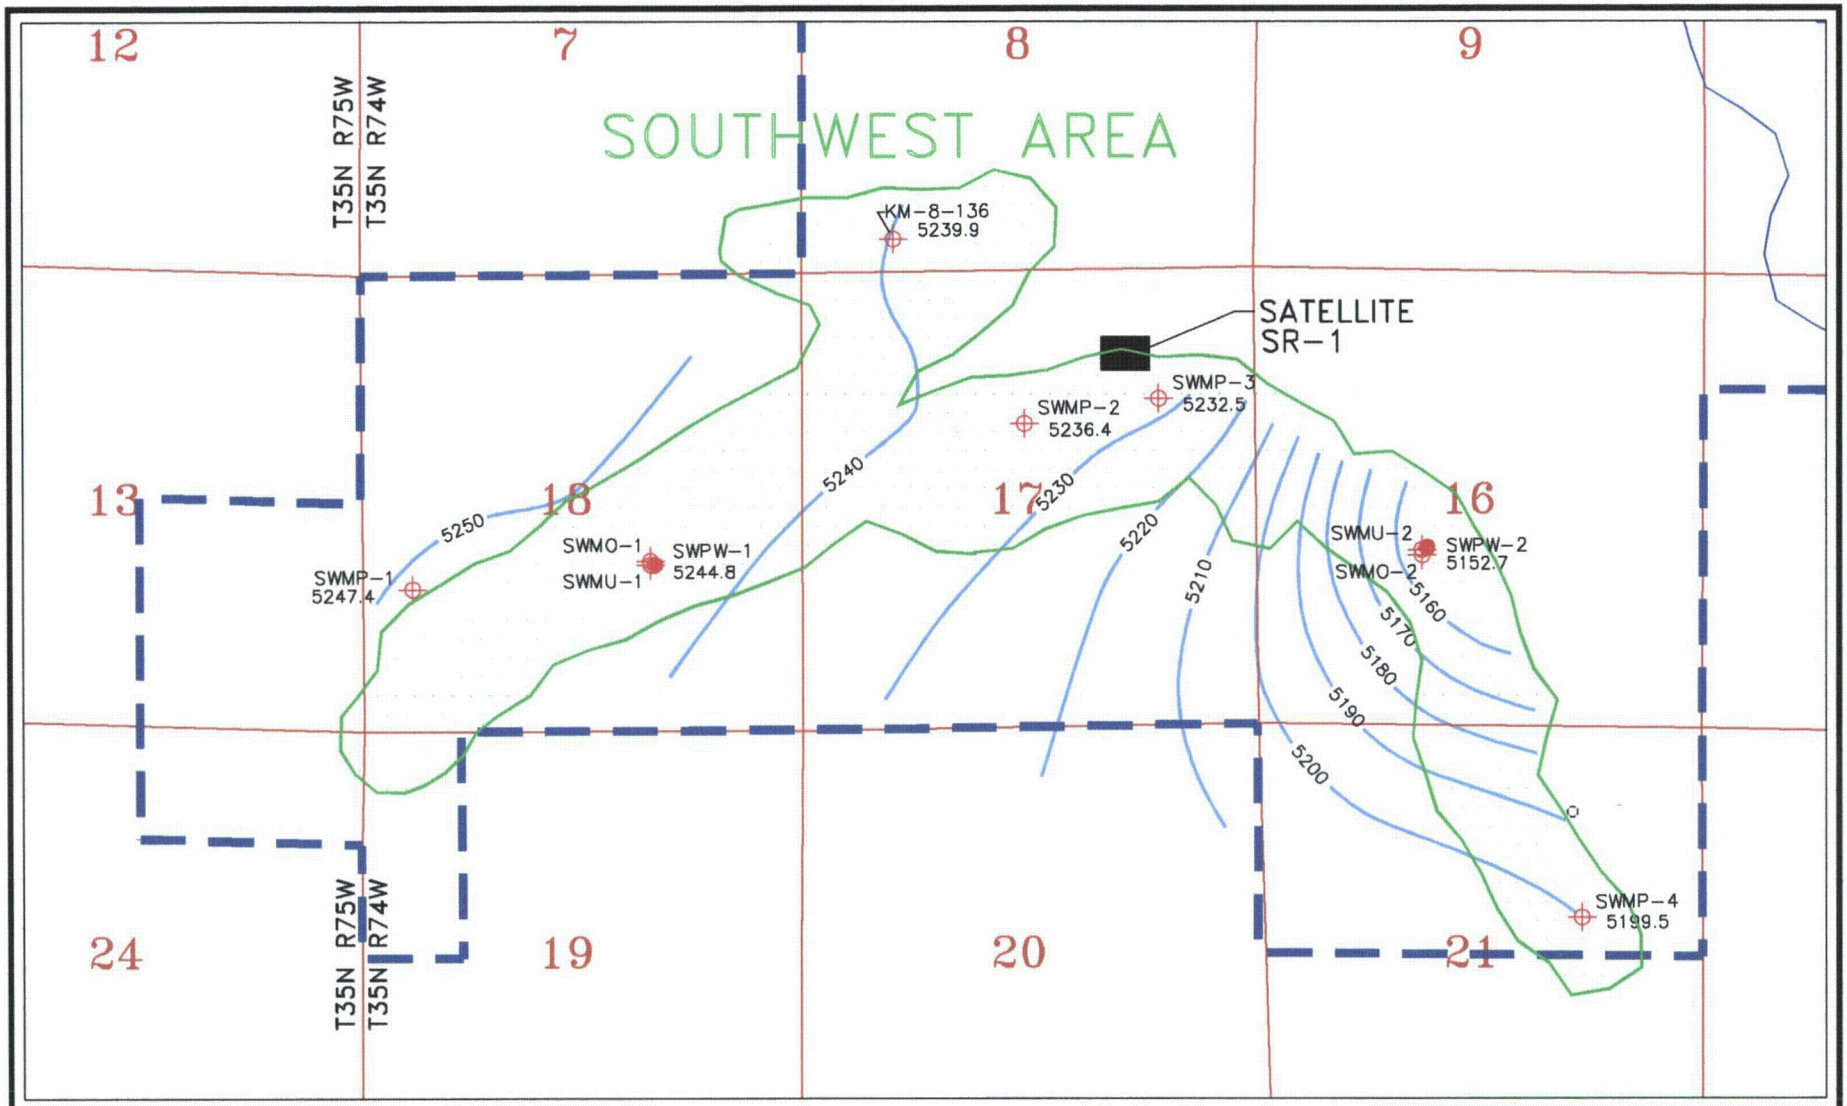

POWER RESOURCES, INC.

FIGURE 5-3

PRI SWA AQUIFER TESTS
POTENTIOMETRIC SURFACE AT THE END OF SWPW-2 TEST, 09/15/06

PROJECT: 288-16	DATE: JANUARY 2007	
SW_GEOBASE_TN_2	BY: KRS	CHECKED: HPD

Petrotek
10288 West Chatfield Ave., Ste 201
Littleton, Colorado 80127
303-290-9414
www.petrotek.com

Power Resources, Inc.
Regional Southwest Area Aquifer Tests
Drawdown vs. Pumping Time SWPW-2 and SWPW-1

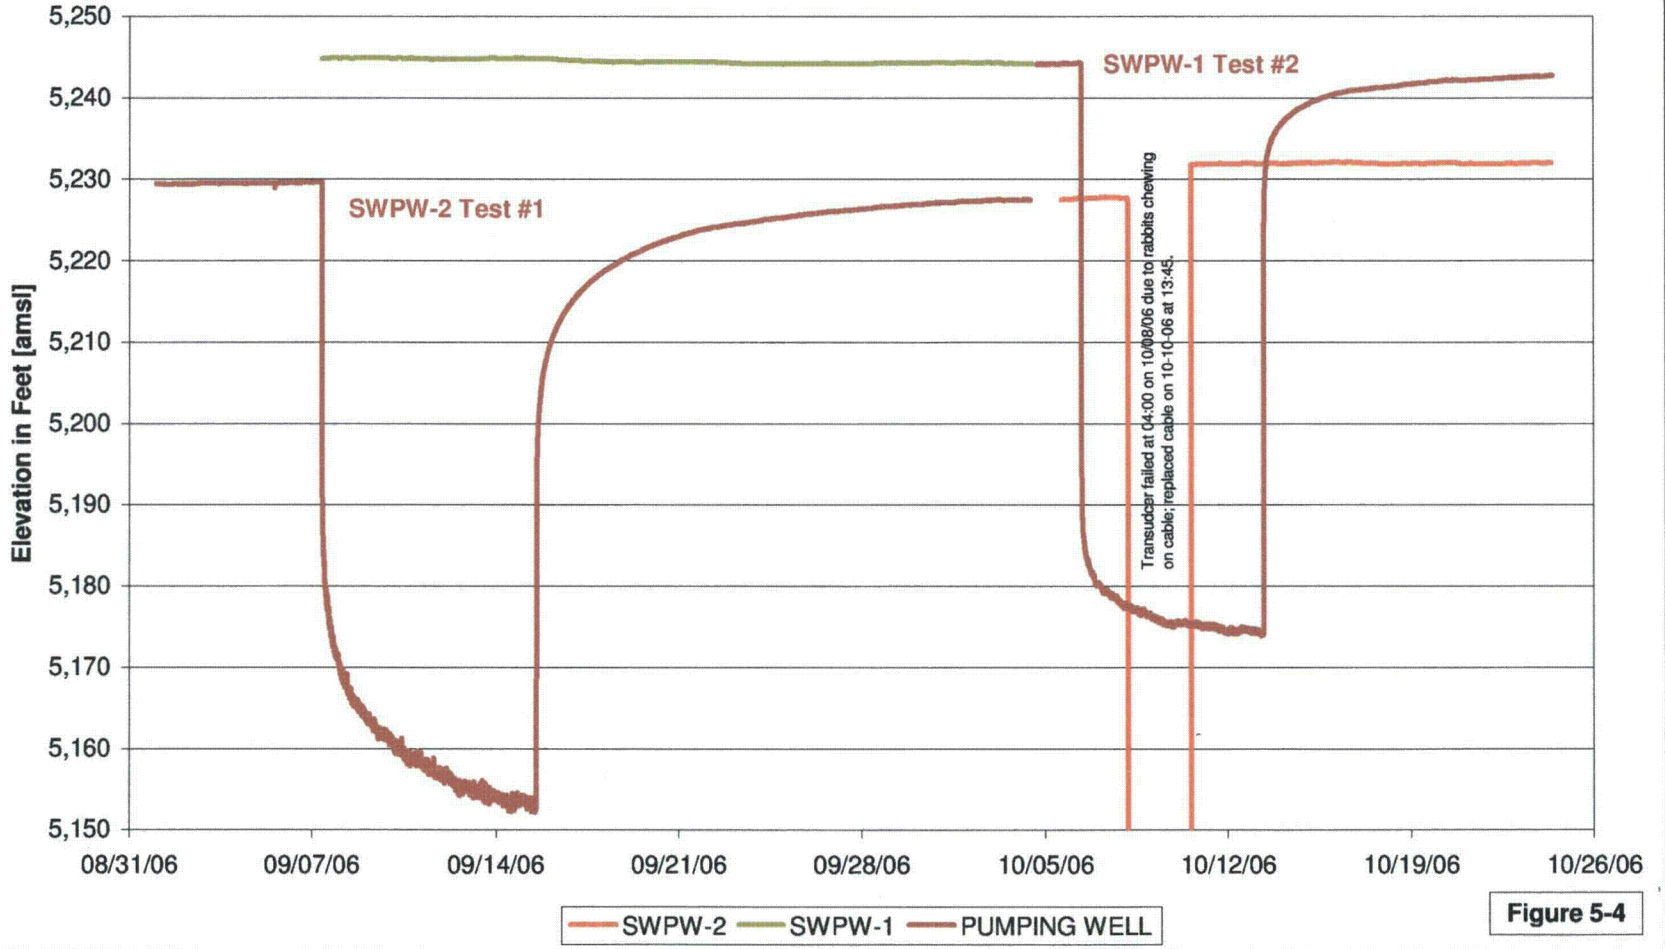

Figure 5-4

Petrotek
10288 West Chatfield Ave., Ste 201
Littleton, Colorado 80127-4239
303-290-9414
www.petrotek.com

Pumping Test Analysis Report

Project: Southwest Area Regional Aquifer Test

Number: 288-18

Client: Power Resources, Inc.

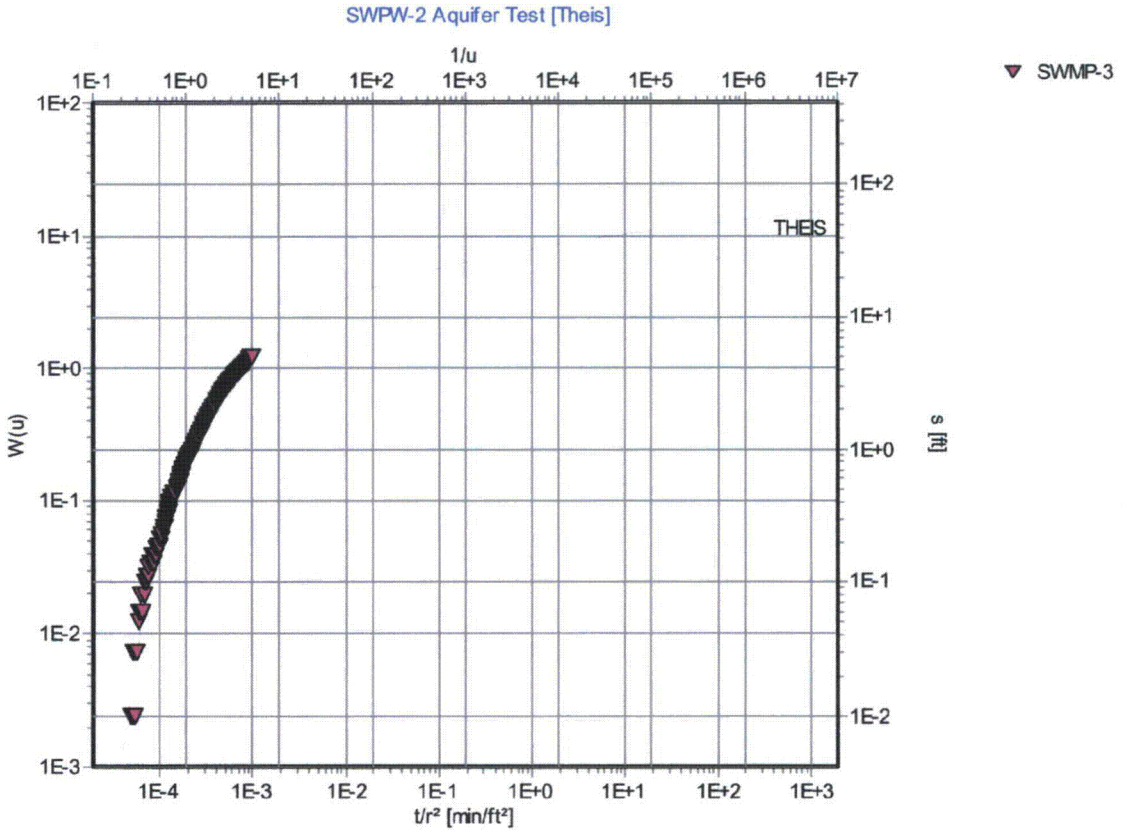

Pumping Test: **SWPW-2 Aquifer Test**

Analysis Method: **Theis**

Analysis Results:	Transmissivity:	1.00E+2 [ft²/d]	Conductivity:	1.11E+0 [ft/d]
	Storativity:	5.37E-5		
Test parameters:	Pumping Well:	SWPW-2	Aquifer Thickness:	90 [ft]
	Casing radius:	0.1875 [ft]	Confined Aquifer	
	Screen length:	100 [ft]		
	Boring radius:	0.328125 [ft]		
	Discharge Rate:	26.9 [U.S. gal/min]		

Figure 5-5

Comments:

Evaluated by: KRS/HPD

Evaluation Date: 1/4/2007

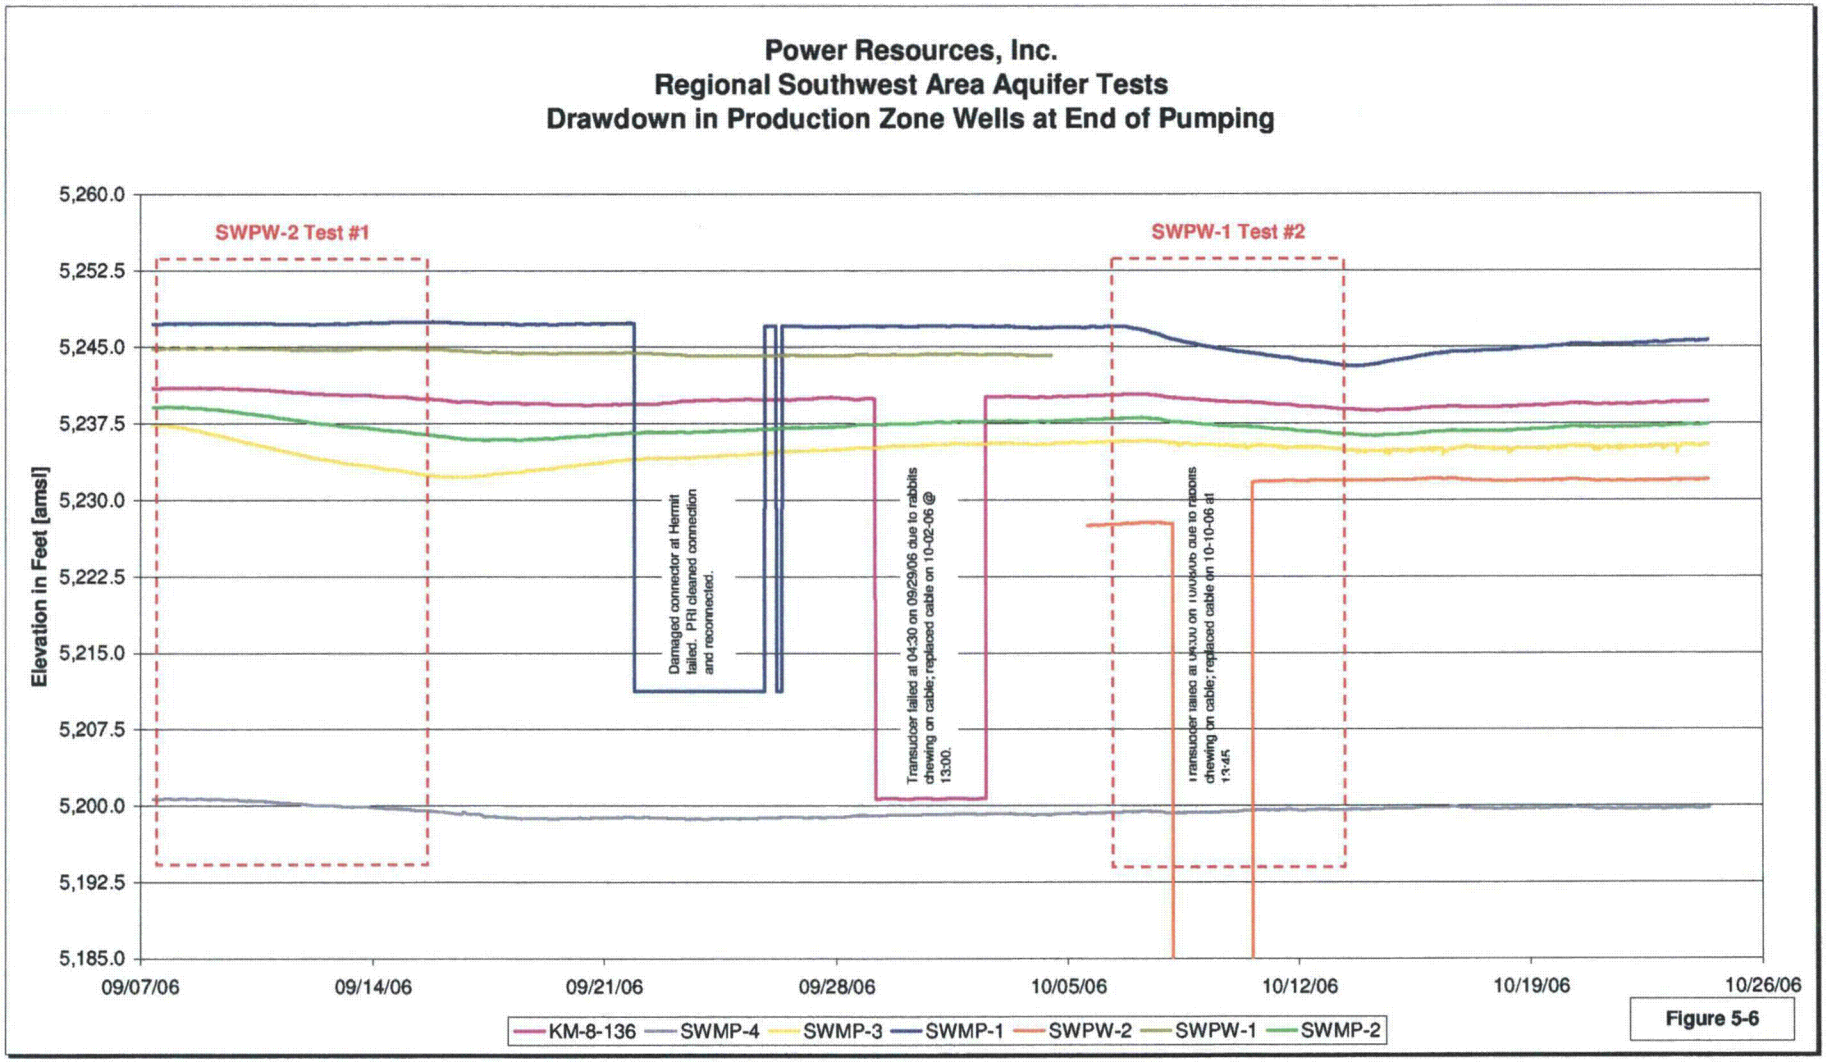
Power Resources, Inc.
Regional Southwest Area Aquifer Tests
Drawdown in Production Zone Wells at End of Pumping
SWPW-2 Test #1
SWPW-1 Test #2
Elevation in Feet [amsl]
5,260.0
5,252.5
5,245.0
5,237.5
5,230.0
5,222.5
5,215.0
5,207.5
5,200.0
5,192.5
5,185.0
09/07/06
09/14/06
09/21/06
09/28/06
10/05/06
10/12/06
10/19/06
10/26/06
Damaged connector at Hermit failed. PRI cleaned connection and reconnected.
Transducer failed at 04:30 on 09/29/06 due to rabbits chewing on cable; replaced cable on 10-02-06 @ 13:00.
Transducer failed at 04:00 on 10/09/06 due to rabbits chewing on cable; replaced cable on 10-10-06 at 13:45
KM-8-136
SWMP-4
SWMP-3
SWMP-1
SWPW-2
SWPW-1
SWMP-2

Figure 5-6

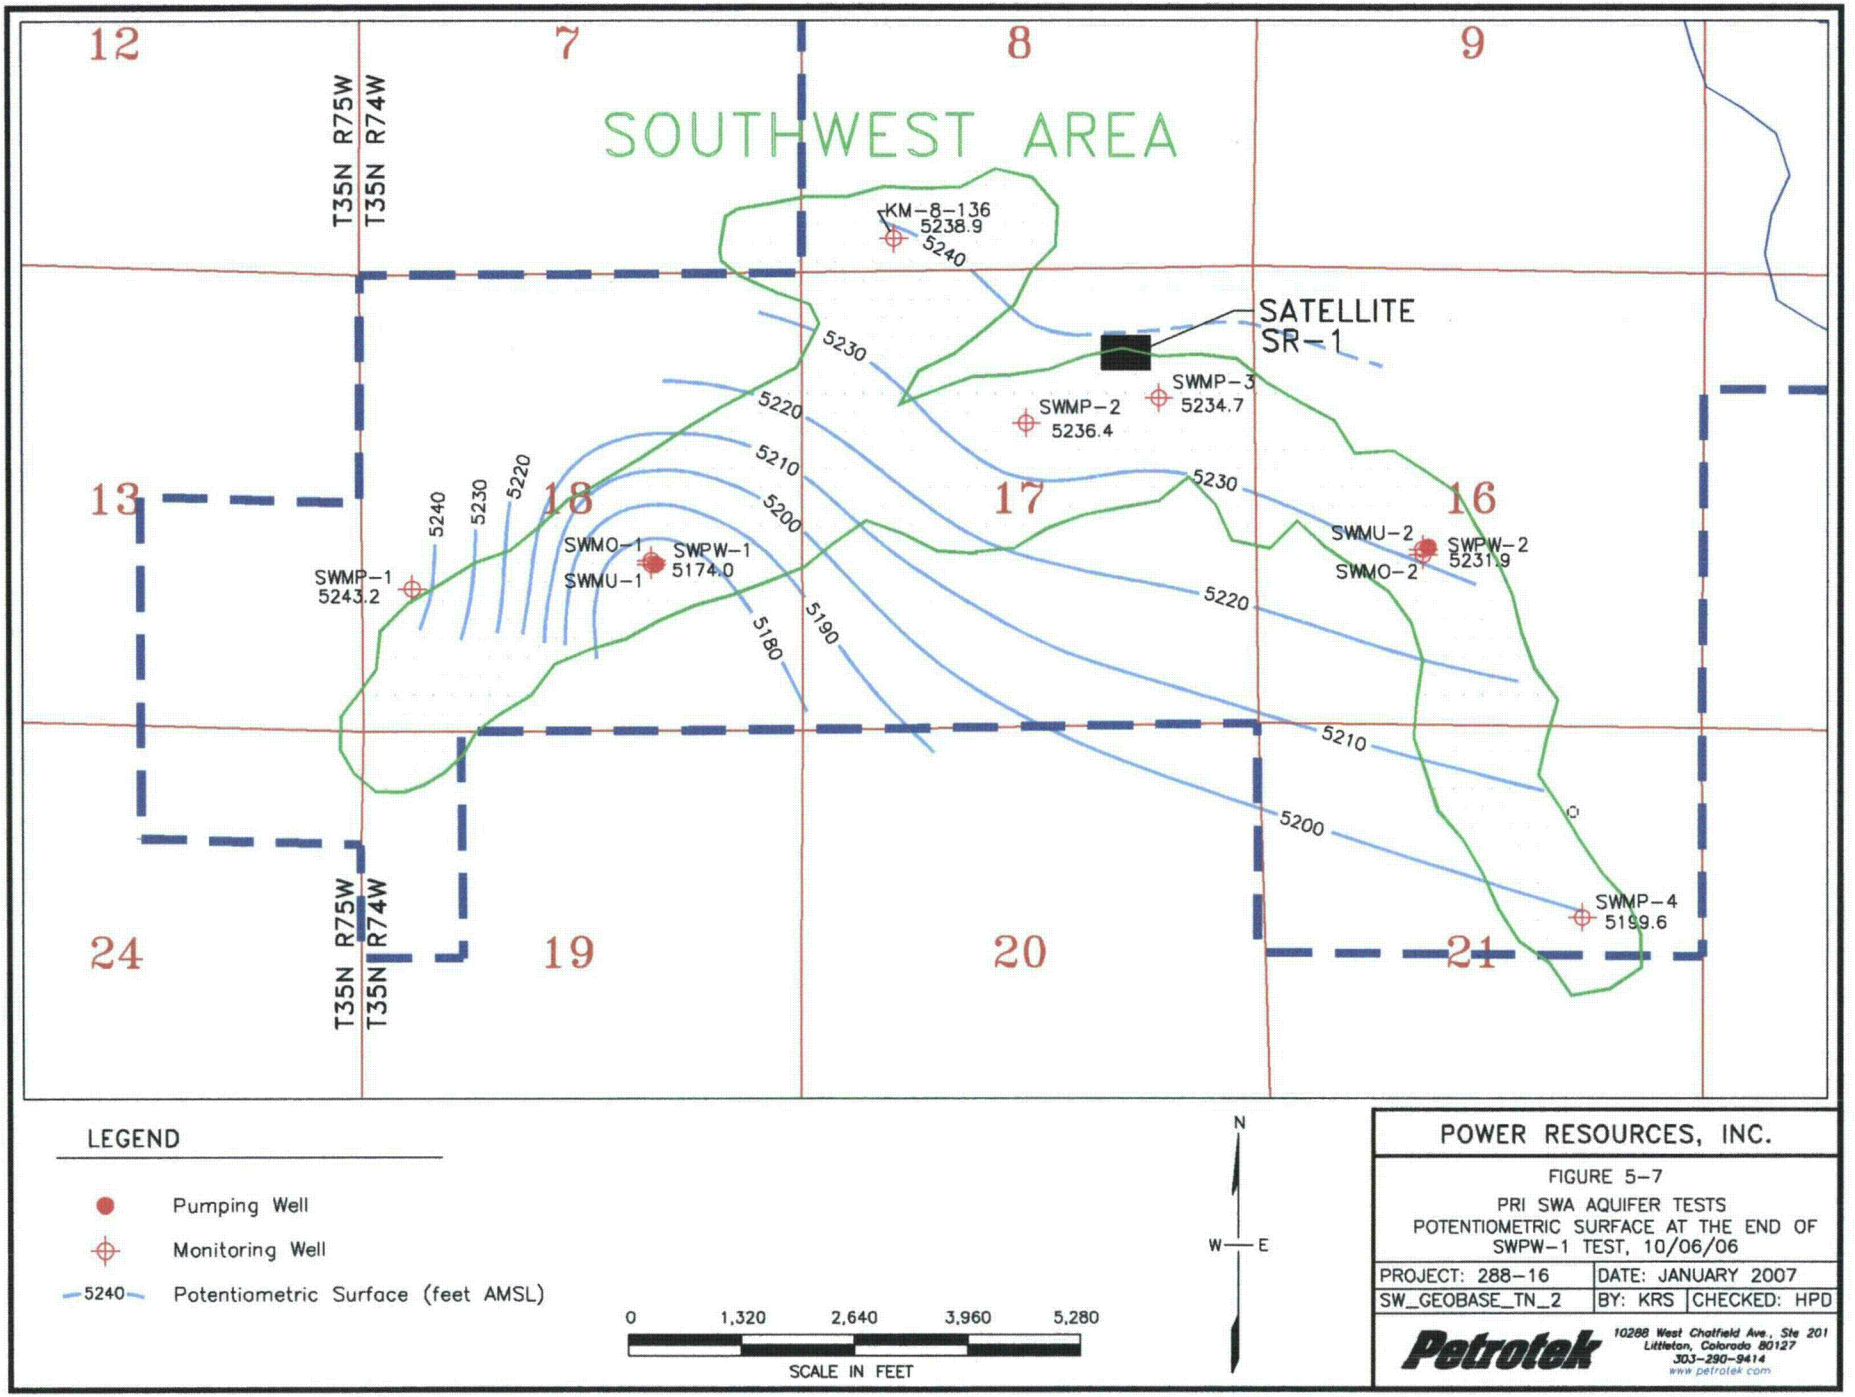

LEGEND

- Pumping Well
- Monitoring Well
- 5240 Potentiometric Surface (feet AMSL)

0 1,320 2,640 3,960 5,280

SCALE IN FEET

N

W E

POWER RESOURCES, INC.

FIGURE 5-7

PRI SWA AQUIFER TESTS
POTENTIOMETRIC SURFACE AT THE END OF SWPW-1 TEST, 10/06/06

PROJECT: 288-16	DATE: JANUARY 2007	
SW_GEOBASE_TN_2	BY: KRS	CHECKED: HPD

Petrotek
10288 West Chatfield Ave., Ste 201
Littleton, Colorado 80127
303-290-9414
www.petrotek.com

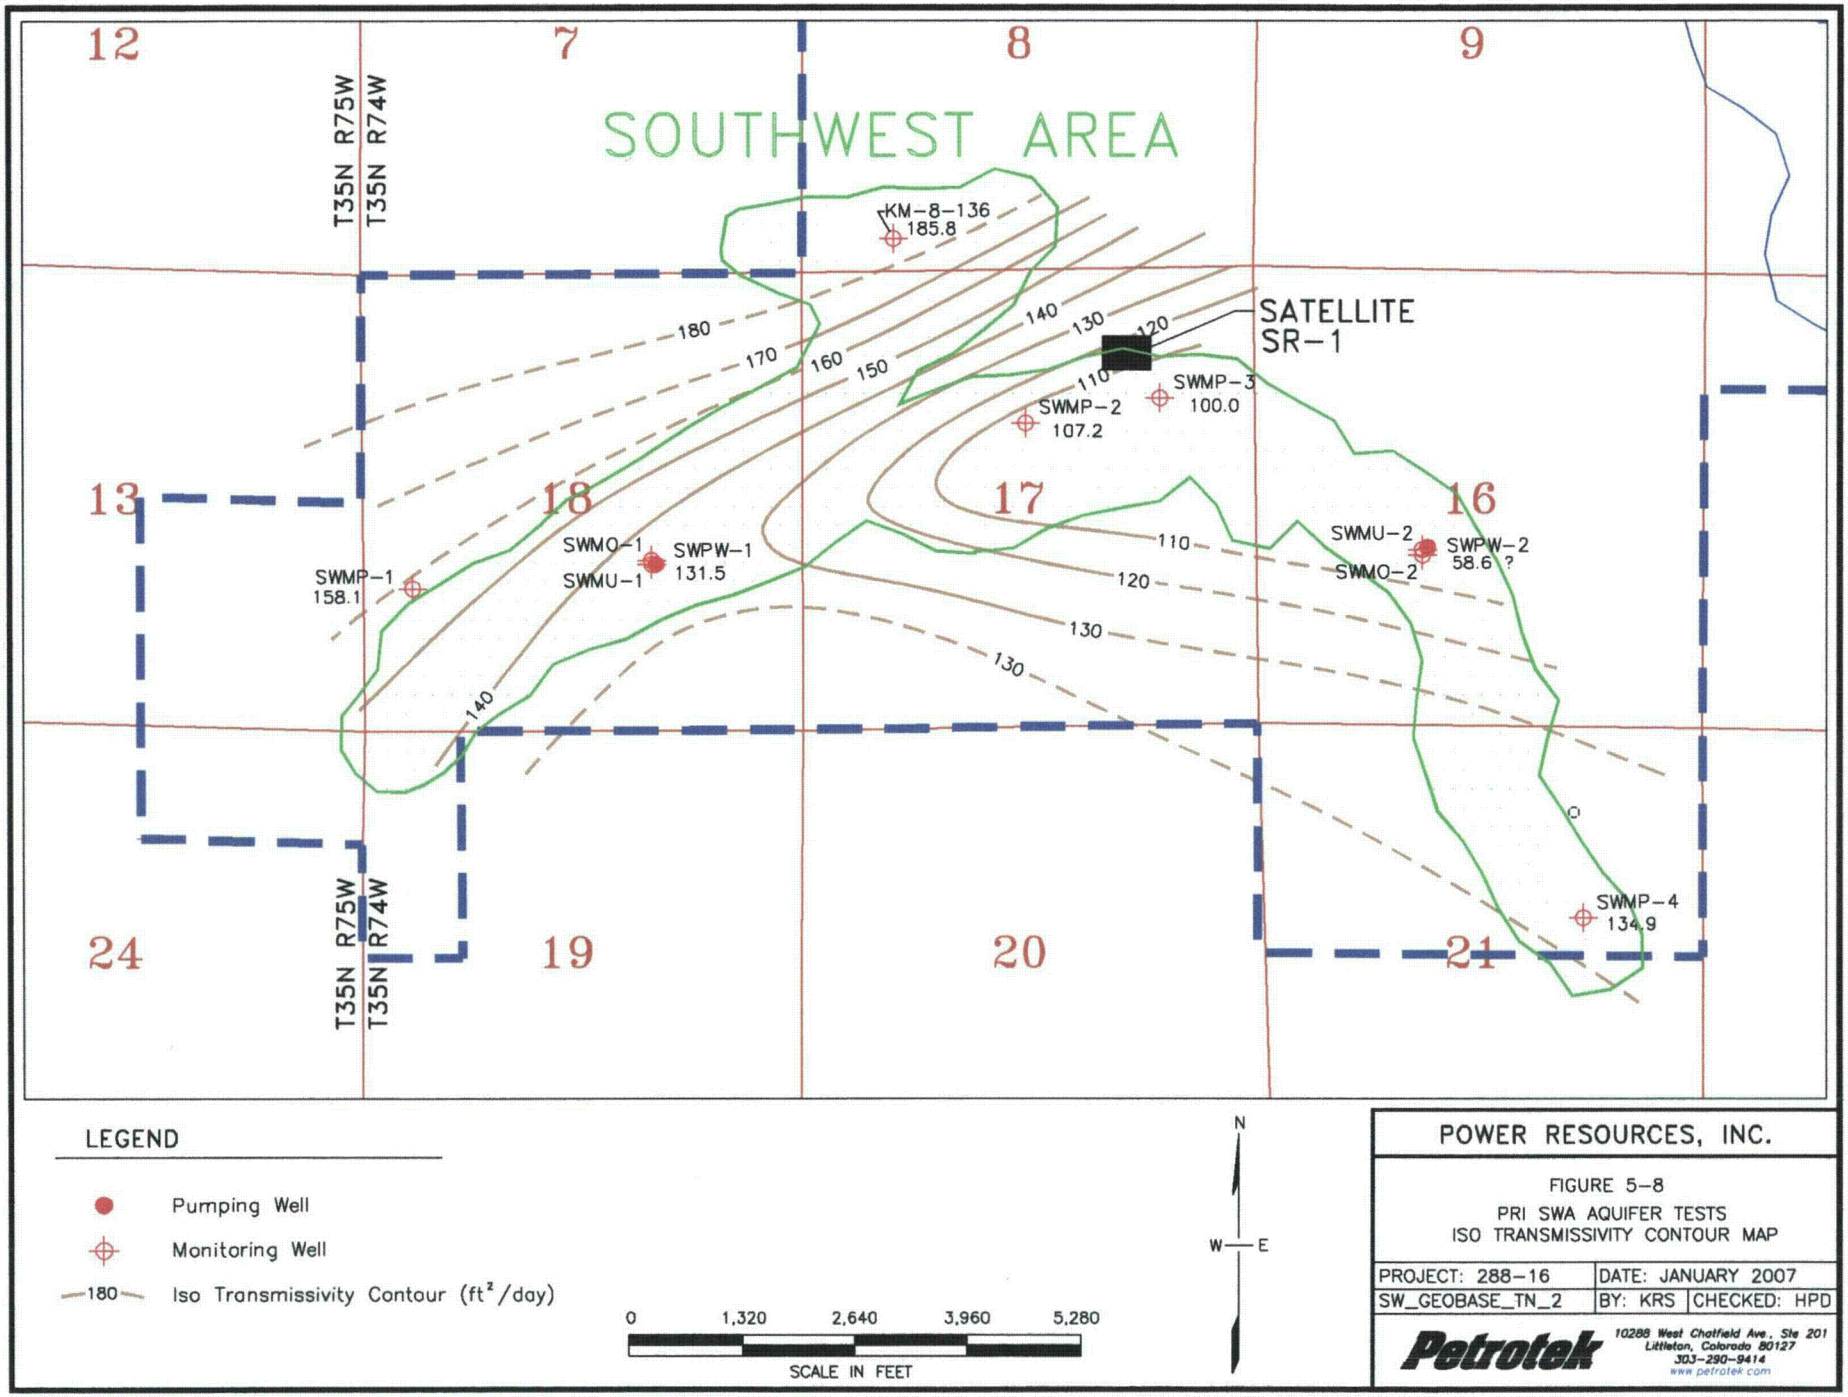

POWER RESOURCES, INC.

FIGURE 5-8
PRI SWA AQUIFER TESTS
ISO TRANSMISSIVITY CONTOUR MAP

PROJECT: 288-16	DATE: JANUARY 2007	
SW_GEOBASE_TN_2	BY: KRS	CHECKED: HPD

Petrotek
10288 West Chatfield Ave., Ste 201
Littleton, Colorado 80127
303-290-9414
www.petrotek.com

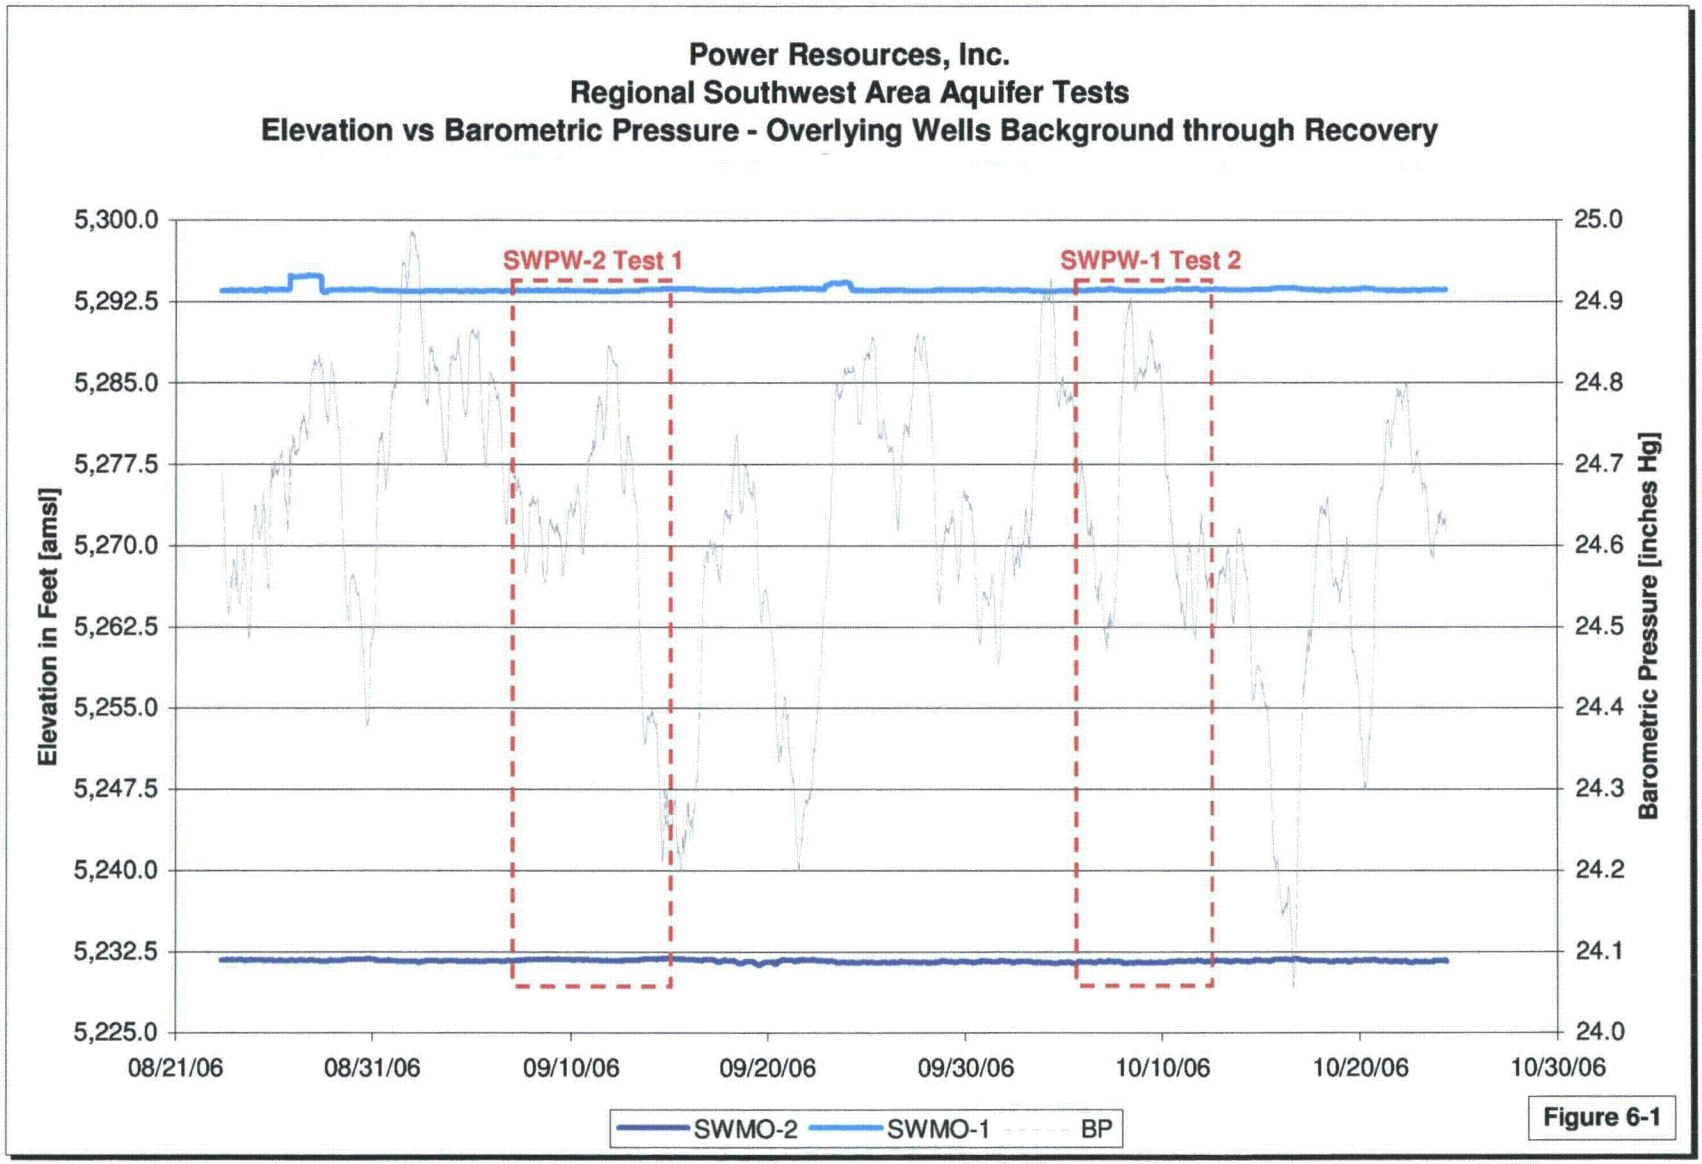
Power Resources, Inc.
Regional Southwest Area Aquifer Tests
Elevation vs Barometric Pressure - Overlying Wells Background through Recovery
SWPW-2 Test 1
SWPW-1 Test 2
Elevation in Feet [amsl]
Barometric Pressure [inches Hg]
5,300.0
5,292.5
5,285.0
5,277.5
5,270.0
5,262.5
5,255.0
5,247.5
5,240.0
5,232.5
5,225.0
25.0
24.9
24.8
24.7
24.6
24.5
24.4
24.3
24.2
24.1
24.0
08/21/06
08/31/06
09/10/06
09/20/06
09/30/06
10/10/06
10/20/06
10/30/06
SWMO-2
SWMO-1
BP

Figure 6-1

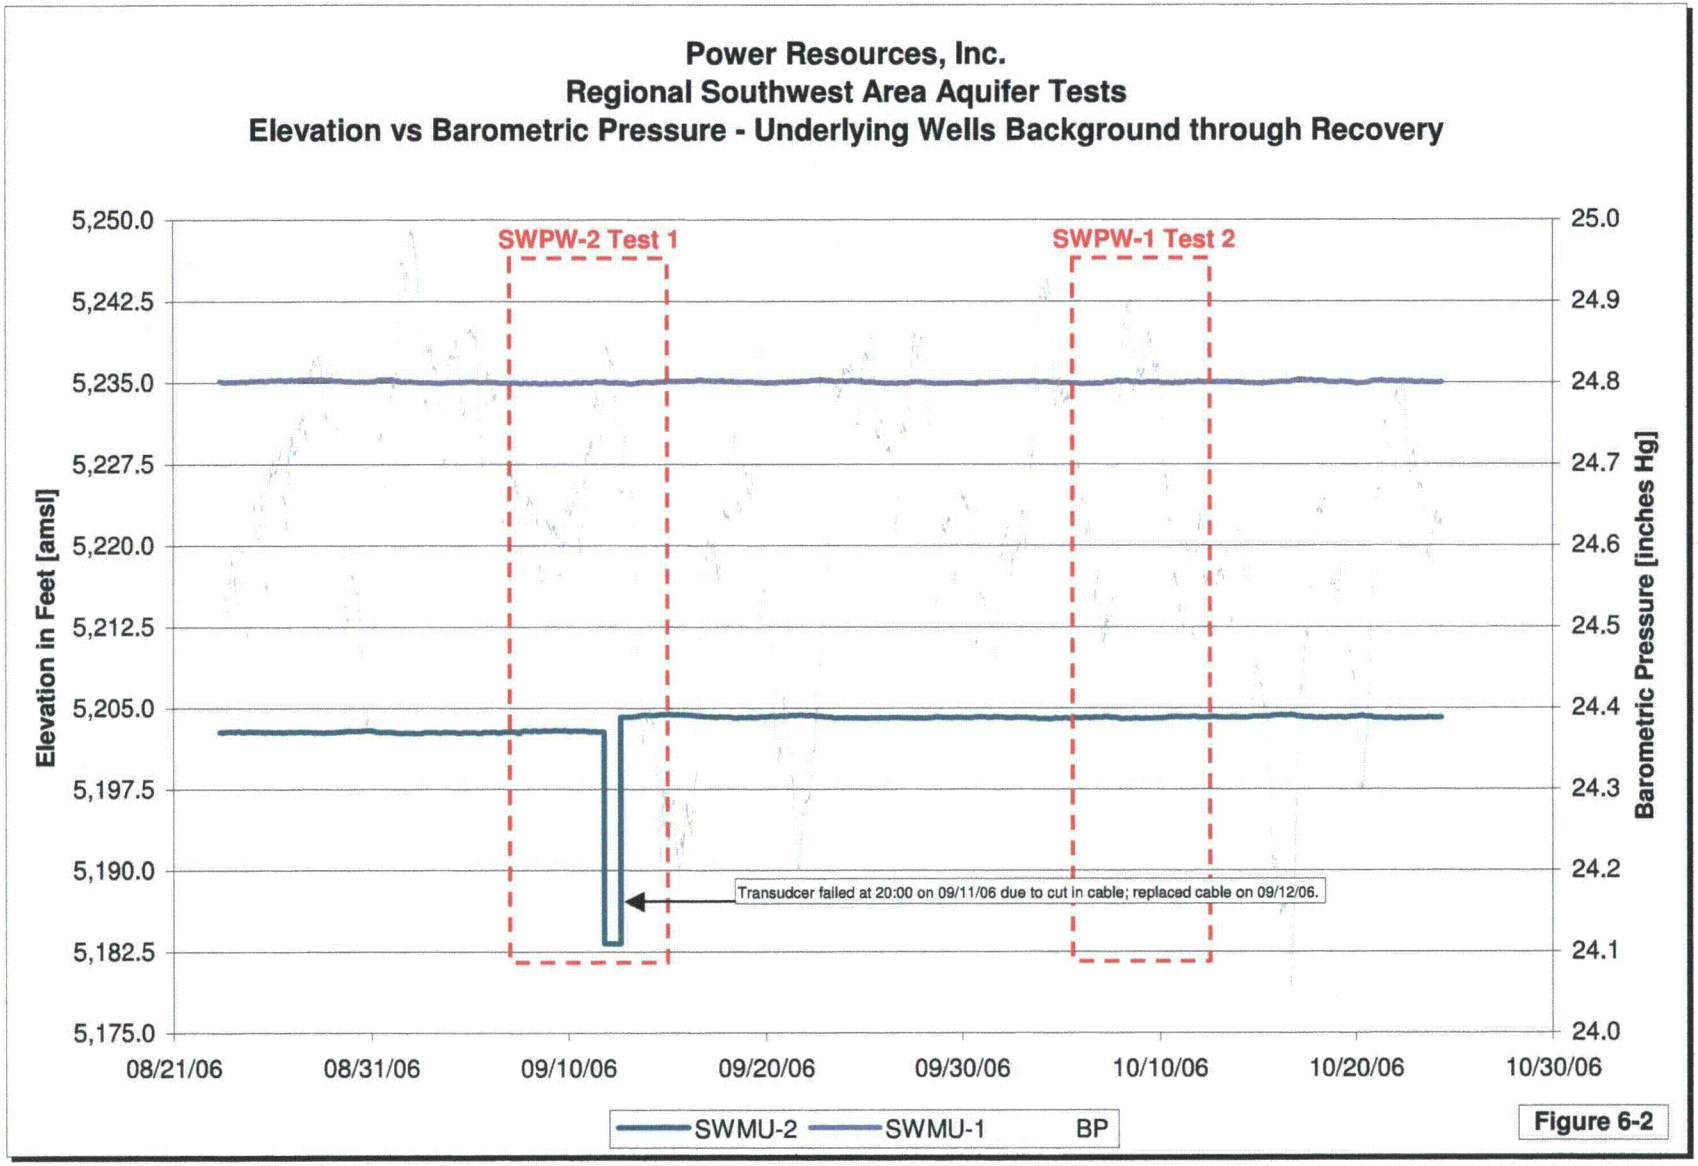
Power Resources, Inc.
Regional Southwest Area Aquifer Tests
Elevation vs Barometric Pressure - Underlying Wells Background through Recovery
SWPW-2 Test 1
SWPW-1 Test 2
Transudcer failed at 20:00 on 09/11/06 due to cut in cable; replaced cable on 09/12/06.
Elevation in Feet [amsl]
Barometric Pressure [inches Hg]
5,250.0
5,242.5
5,235.0
5,227.5
5,220.0
5,212.5
5,205.0
5,197.5
5,190.0
5,182.5
5,175.0
25.0
24.9
24.8
24.7
24.6
24.5
24.4
24.3
24.2
24.1
24.0
08/21/06
08/31/06
09/10/06
09/20/06
09/30/06
10/10/06
10/20/06
10/30/06
SWMU-2
SWMU-1
BP

Figure 6-2

APPENDIX A
GEOLOGIC LOGS

THIS PAGE IS AN OVERSIZED DRAWING OR FIGURE,

THAT CAN BE VIEWED AT THE RECORD TITLED:

"ATTACHMENT A
MINE UNIT SW
"GEOLOGIC CROSS SECTION
GEOLOGIC LOGS
SECTIONS 18-35-74, 16-35-74,
17-35-74 & 21-35-74."

WITHIN THIS PACKAGE... OR

D-06X

APPENDIX B
COMPLETION REPORTS

POWER RESOURCES, INC.
SMITH RANCH-HIGHLAND URANIUM PROJECT
COMPLETION AND RECOMPLETION REPORT

WELL NUMBER	KM-8-136
ALIAS_NAME:	
HDR_HSE	MON
HOLE_DIAMETER	'7-7/8"'
CASING_SIZE	4.5"
REAMED_DIAMETER	8.875

DATE

CONTRACTOR

PRI REPRESENTATIVE

LINER DATA

PACKER TYPE	Figure K	NUMBER	2
LINER DIAMETER	3		
SCREEN TYPE	Regular	SLOT	0.03

GRAVEL

SIZE	10/20 Mesh		
SACKS CALCULATED	N/A	TAKEN	0

COMMENTS: This hole was drilled in June 1985 as a open hole. Cased to 814' and open to 870'.

TAGGED TOP OF J COLLAR 0



CASING T.D. 814

UNDER-REAMED INTERVAL

DRILLED T.D 870



	FEET	FROM	TO
TOP ASS'Y		0	
BLANK	0		
SCREEN	0	0	0
VALVE ASS'Y	2	0	2

POWER RESOURCES, INC.
SMITH RANCH-HIGHLAND URANIUM PROJECT
COMPLETION AND RECOMPLETION REPORT

WELL NUMBER	**SWMO-001**	**DATE**	7/12/2006
ALIAS_NAME:		**CONTRACTOR**	TYLER EXPL
HDR_HSE	MON	**PRI REPRESENTATIVE**	*Jon Green*
HOLE_DIAMETER	7-7/8"'		
CASING_SIZE	4.5"		
REAMED_DIAMETER	8.875		

LINER DATA

PACKER TYPE	'Figure K'	NUMBER	2
LINER DIAMETER	3		
SCREEN TYPE	Regular	SLOT	0.03

GRAVEL

SIZE	'10/20 Mesh'		
SACKS CALCULATED	N/A	TAKEN	0

COMMENTS:

TAGGED TOP OF J COLLAR 757



DRILLED T.D 810



	FEET	FROM	TO
TOP ASS'Y	3	757	760
BLANK	5	760	765
SCREEN	25	765	790
VALVE ASS'Y	2	790	792

POWER RESOURCES, INC.
SMITH RANCH-HIGHLAND URANIUM PROJECT
COMPLETION AND RECOMPLETION REPORT

WELL NUMBER	**SWMO-002**	**DATE**	7/11/2006
ALIAS_NAME:		**CONTRACTOR**	TAYLOR DRILLING
HDR_HSE	MON	**PRI REPRESENTATIVE**	*Jon Green*
HOLE_DIAMETER	'7-7/8"'		
CASING_SIZE	4.5"		
REAMED_DIAMETER	8.875		

LINER DATA

PACKER TYPE	Figure K	NUMBER	2
LINER DIAMETER	3		
SCREEN TYPE	Regular	SLOT	0.03

GRAVEL

SIZE	10/20 Mesh		
SACKS CALCULATED	N/A	TAKEN	0

COMMENTS:

TAGGED TOP OF J COLLAR 832



REAMER
CONE
BLADE 10

CASING T.D. 840

UNDER-REAMED INTERVAL 840 – 870

DRILLED T.D 900



	FEET	FROM	TO
TOP ASS'Y	3	832	835
BLANK	5	835	840
SCREEN	30	840	870
VALVE ASS'Y	2	870	872

POWER RESOURCES, INC.
SMITH RANCH-HIGHLAND URANIUM PROJECT
COMPLETION AND RECOMPLETION REPORT

WELL NUMBER	**SWMP-001A**	**DATE**	8/1/2006
ALIAS_NAME:		**CONTRACTOR**	TYLER EXPL
HDR_HSE	MON	**PRI REPRESENTATIVE**	*Jon Green*
HOLE_DIAMETER	7-7/8"		
CASING_SIZE	4.5"		
REAMED_DIAMETER	8.875		

LINER DATA

PACKER TYPE	Figure K	NUMBER	2
LINER DIAMETER	3		
SCREEN TYPE	Regular	SLOT	0.03

GRAVEL

SIZE	10/20 Mesh		
SACKS CALCULATED	N/A	TAKEN	0

COMMENTS:

TAGGED TOP OF J COLLAR 932



CASING T.D.	940
UNDER-REAMED INTERVAL	940 1050
DRILLED T.D	1060



	FEET	FROM	TO
TOP ASS'Y	3	932	935
BLANK	5	935	940
SCREEN	110	940	1050
VALVE ASS'Y	2	1050	1052

POWER RESOURCES, INC.
SMITH RANCH-HIGHLAND URANIUM PROJECT
COMPLETION AND RECOMPLETION REPORT

WELL NUMBER	**SWMP-002**	**DATE**	6/28/2006
ALIAS_NAME:		**CONTRACTOR**	TAYLOR DRILLING
HDR_HSE	MON	**PRI REPRESENTATIVE**	*Jon Green*
HOLE_DIAMETER	7-7/8"		
CASING_SIZE	4.5"		
REAMED_DIAMETER	8.875		

LINER DATA

PACKER TYPE	Figure K	NUMBER	2
LINER DIAMETER	3		
SCREEN TYPE	Regular	SLOT	0.03

GRAVEL

SIZE	10/20 Mesh		
SACKS CALCULATED	N/A	TAKEN	0

COMMENTS:

TAGGED TOP OF J COLLAR 862



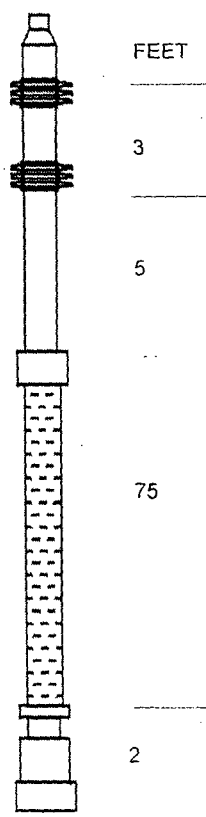

	FEET	FROM	TO
TOP ASS'Y	3	862	865
BLANK	5	865	870
SCREEN	75	870	945
VALVE ASS'Y	2	945	947

POWER RESOURCES, INC.
SMITH RANCH-HIGHLAND URANIUM PROJECT
COMPLETION AND RECOMPLETION REPORT

WELL NUMBER	**SWMP-003**	**DATE**	6/29/2006
ALIAS_NAME:		**CONTRACTOR**	TAYLOR DRILLING
HDR_HSE	MON	**PRI REPRESENTATIVE**	*Perry Hershberger*
HOLE_DIAMETER	7-7/8"		
CASING_SIZE	4.5"		
REAMED_DIAMETER	8.875		

LINER DATA

PACKER TYPE	Figure K	NUMBER	2
LINER DIAMETER	3		
SCREEN TYPE	Regular	SLOT	0.03

GRAVEL

SIZE	10/20 Mesh		
SACKS CALCULATED	N/A	TAKEN	0

COMMENTS:

TAGGED TOP OF J COLLAR 887



REAMER CONE
BLADE 10

CASING T.D.	900
UNDER-REAMED INTERVAL	895
	945
DRILLED T.D	950



	FEET	FROM	TO
TOP ASS'Y	3	887	890
BLANK	5	890	895
SCREEN	50	895	945
VALVE ASS'Y	2	945	947

POWER RESOURCES, INC.
SMITH RANCH-HIGHLAND URANIUM PROJECT
COMPLETION AND RECOMPLETION REPORT

WELL NUMBER	**SWMP-004**	**DATE**	7/17/2006
ALIAS_NAME:		**CONTRACTOR**	TAYLOR DRILLING
HDR_HSE	MON	**PRI REPRESENTATIVE**	*Jon Green*
HOLE_DIAMETER	'7-7/8"'		
CASING_SIZE	4.5"		
REAMED_DIAMETER	8.875		

LINER DATA

PACKER TYPE	Figure K	NUMBER	2
LINER DIAMETER	3		
SCREEN TYPE	Regular	SLOT	0.03

GRAVEL

SIZE	10/20 Mesh		
SACKS CALCULATED	N/A	TAKEN	0

COMMENTS:

TAGGED TOP OF J COLLAR 722



REAMER
CONE
BLADE 10

CASING T.D. 730

UNDER-REAMED INTERVAL 730 – 815

DRILLED T.D 840



	FEET	FROM	TO
TOP ASS'Y	3	722	725
BLANK	5	725	730
SCREEN	85	730	815
VALVE ASS'Y	2	815	817

POWER RESOURCES, INC.
SMITH RANCH-HIGHLAND URANIUM PROJECT
COMPLETION AND RECOMPLETION REPORT

WELL NUMBER	**SWMU-001**	**DATE**	7/21/2006
ALIAS_NAME:		**CONTRACTOR**	TYLER EXPL
HDR_HSE	MON	**PRI REPRESENTATIVE**	*Jon Green*
HOLE_DIAMETER	'7-7/8"'		
CASING_SIZE	4.5"		
REAMED_DIAMETER	8.875		

LINER DATA

PACKER TYPE	Figure K	NUMBER	2
LINER DIAMETER	3		
SCREEN TYPE	Regular	SLOT	0.03

GRAVEL

SIZE	10/20 Mesh		
SACKS CALCULATED	N/A	TAKEN	0

COMMENTS:

TAGGED TOP OF J COLLAR 1012



CASING T.D.	1020
UNDER-REAMED INTERVAL	1020 1035
DRILLED T.D	1060



	FEET	FROM	TO
TOP ASS'Y	3	1012	1015
BLANK	5	1015	1020
SCREEN	15	1020	1035
VALVE ASS'Y	2	1035	1037

POWER RESOURCES, INC.
SMITH RANCH-HIGHLAND URANIUM PROJECT
COMPLETION AND RECOMPLETION REPORT

WELL NUMBER	**SWMU-002**
ALIAS_NAME:	
HDR_HSE	MON
HOLE_DIAMETER	'7-7/8"'
CASING_SIZE	4.5"
REAMED_DIAMETER	8.875

DATE	7/17/2006
CONTRACTOR	TAYLOR DRILLING
PRI REPRESENTATIVE	*Jon Green*

LINER DATA

PACKER TYPE	Figure K	NUMBER	2
LINER DIAMETER	3		
SCREEN TYPE	Regular	SLOT	0.03

GRAVEL

SIZE	10/20 Mesh		
SACKS CALCULATED	N/A	TAKEN	0

COMMENTS:

TAGGED TOP OF J COLLAR 1052



REAMER CONE	
BLADE	0
CASING T.D.	1060
UNDER-REAMED INTERVAL	1060 1100
DRILLED T.D	1100



	FEET	FROM	TO
TOP ASS'Y	3	1052	1055
BLANK	5	1055	1060
SCREEN	40	1060	1100
VALVE ASS'Y	2	1100	1102

POWER RESOURCES, INC.
SMITH RANCH-HIGHLAND URANIUM PROJECT
DUAL COMPLETION AND RECOMPLETION REPORT

WELL NUMBER	**SWPW-001**	**DATE**	7/10/2006
ALIAS NO:		**CONTRACTOR**	TAYLOR DRILLING
HDR_HSE	MON	**PRI REPRESENTATIVE**	*Jon Green*
HOLE_DIAMETER	'7-7/8"'		
CASING_SIZE	4.5"		
REAMED_DIAMETER	8.875		

LINER DATA

PACKER TYPE	Figure K	NUMBER	2
LINER DIAMETER	3		
SCREEN TYPE	*Regular*	SLOT	0.03

GRAVEL

SIZE	10/20 Mesh		
SACKS CALCULATED	N/A	TAKEN	0

COMMENTS:

TAGGED TOP OF J COLLAR 832

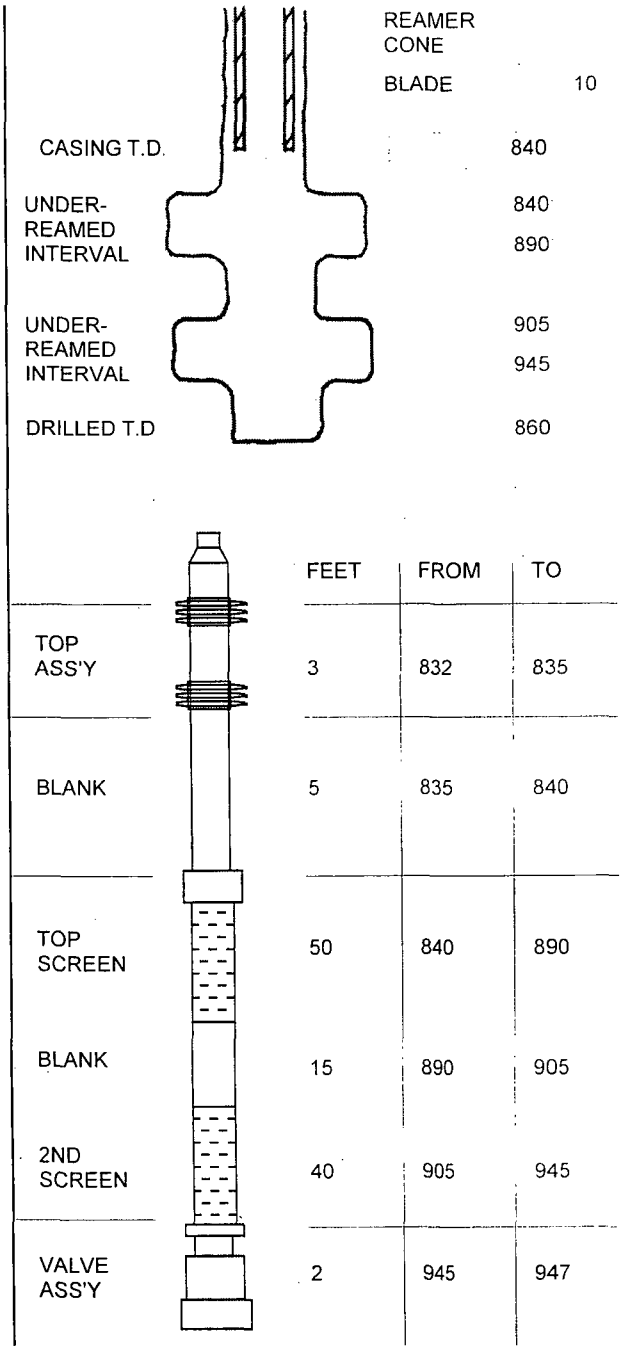

	FEET	FROM	TO
TOP ASS'Y	3	832	835
BLANK	5	835	840
TOP SCREEN	50	840	890
BLANK	15	890	905
2ND SCREEN	40	905	945
VALVE ASS'Y	2	945	947

POWER RESOURCES, INC.
SMITH RANCH-HIGHLAND URANIUM PROJECT
COMPLETION AND RECOMPLETION REPORT

WELL NUMBER	**SWPW-002**	**DATE**	7/13/2006
ALIAS_NAME:		**CONTRACTOR**	TAYLOR DRILLING
HDR_HSE	MON	**PRI REPRESENTATIVE**	*Jon Green*
HOLE_DIAMETER	"7-7/8"'		
CASING_SIZE	4.5"		
REAMED_DIAMETER	8.875		

LINER DATA

PACKER TYPE	Figure K	NUMBER	2
LINER DIAMETER	3		
SCREEN TYPE	*Regular*	SLOT	0.03

GRAVEL

SIZE	10/20 Mesh		
SACKS CALCULATED	N/A	TAKEN	0

COMMENTS:

TAGGED TOP OF J COLLAR 912



REAMER CONE BLADE 0

CASING T.D.	940
UNDER-REAMED INTERVAL	930 1030
DRILLED T.D	1070



	FEET	FROM	TO
TOP ASS'Y	3	912	915
BLANK	15	915	930
SCREEN	100	930	1030
VALVE ASS'Y	2	1030	1032

APPENDIX C
TYPE CURVE MATCHES

Petrotek
10288 West Chatfield Ave., Ste 201
Littleton, Colorado 80127-4239
303-290-9414
www.petrotek.com

Pumping Test Analysis Report

Project: Southwest Area Regional Aquifer Test

Number: 288-18

Client: Power Resources, Inc.

SWPW-1 Aquifer Test [Theis]

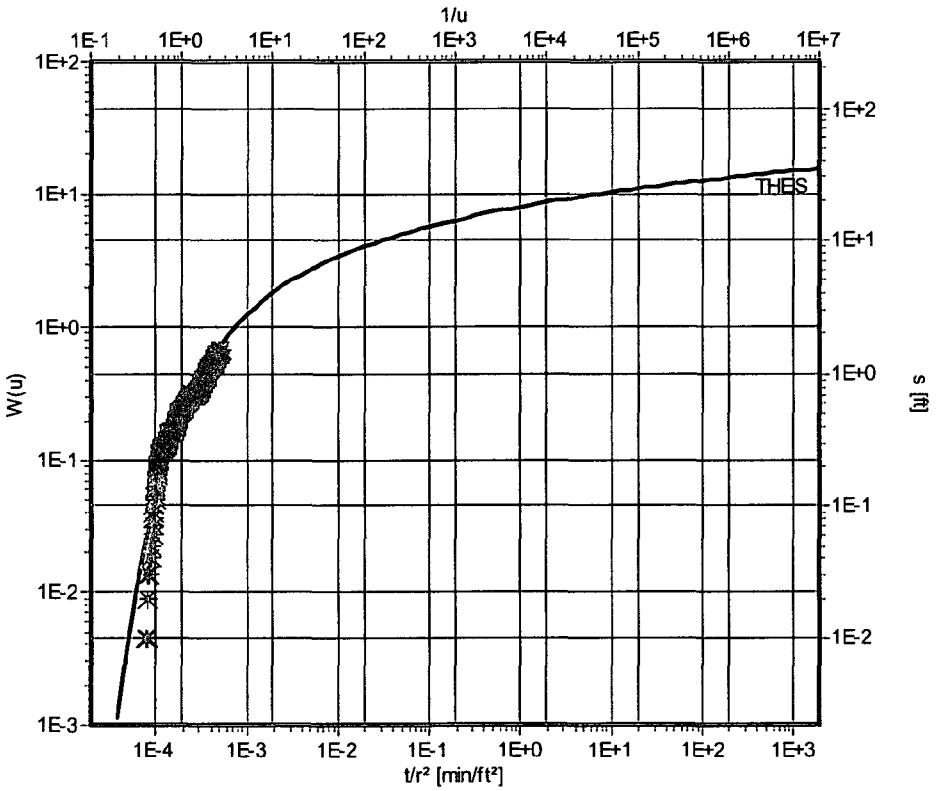

✳ KM-8-136

Pumping Test: **SWPW-1 Aquifer Test**

Analysis Method: **Theis**

Analysis Results:	Transmissivity:	1.86E+2 [ft²/d]	Conductivity:	2.06E+0 [ft/d]
	Storativity:	9.97E-5		
Test parameters:	Pumping Well:	SWPW-1	Aquifer Thickness:	90 [ft]
	Casing radius:	0.1875 [ft]	Confined Aquifer	
	Screen length:	50 [ft]		
	Boring radius:	0.328125 [ft]		
	Discharge Rate:	27 [U.S. gal/min]		

Comments:

Evaluated by: KRS/HPD

Evaluation Date: 1/5/2007

Petrotek
10288 West Chatfield Ave., Ste 201
Littleton, Colorado 80127-4239
303-290-9414
www.petrotek.com

Pumping Test Analysis Report

Project: Southwest Area Regional Aquifer Test

Number: 288-18

Client: Power Resources, Inc.

SWPW-1 Aquifer Test [Theis]

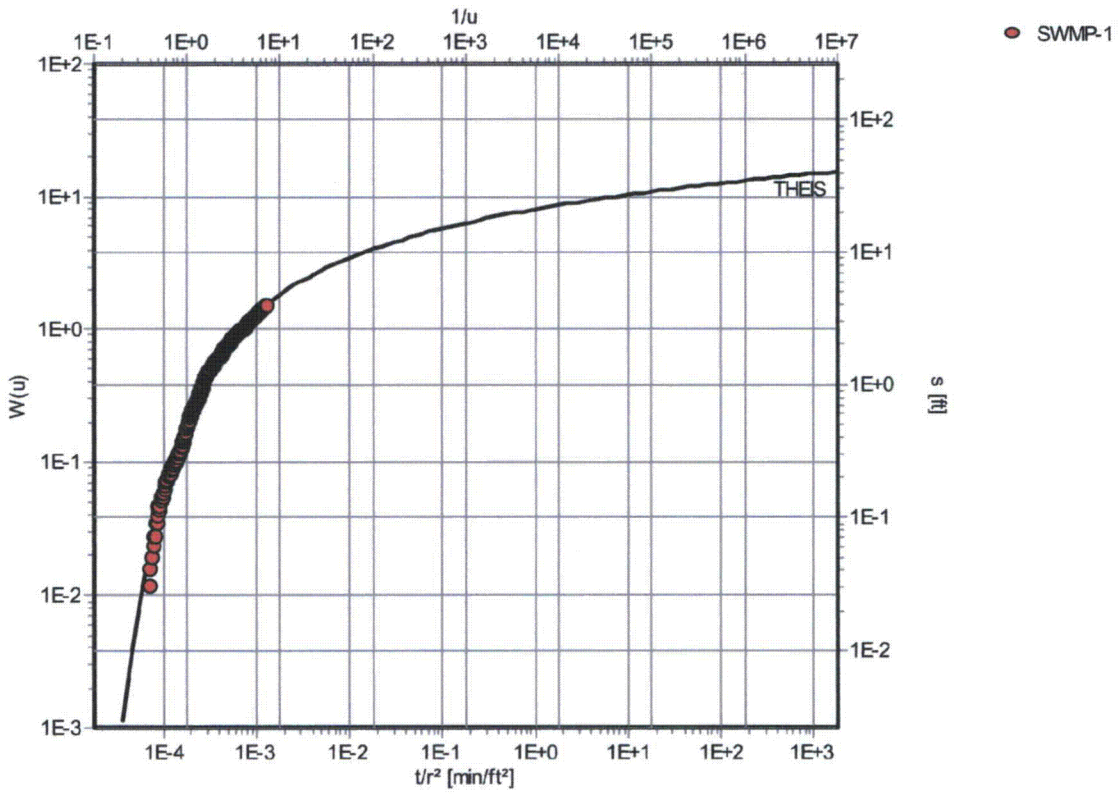

Pumping Test: **SWPW-1 Aquifer Test**

Analysis Method: **Theis**

Analysis Results:	Transmissivity:	1.58E+2 [ft²/d]	Conductivity:	1.76E+0 [ft/d]
	Storativity:	7.92E-5		
Test parameters:	Pumping Well:	SWPW-1	Aquifer Thickness:	90 [ft]
	Casing radius:	0.1875 [ft]	Confined Aquifer	
	Screen length:	50 [ft]		
	Boring radius:	0.328125 [ft]		
	Discharge Rate:	27 [U.S. gal/min]		

Comments:

Evaluated by: KRS/HPD

Evaluation Date: 1/5/2007

Petrotek
10288 West Chatfield Ave., Ste 201
Littleton, Colorado 80127-4239
303-290-9414
www.petrotek.com

Pumping Test Analysis Report

Project: Southwest Area Regional Aquifer Test

Number: 288-18

Client: Power Resources, Inc.

SWPW-1 Aquifer Test [Theis Recovery]

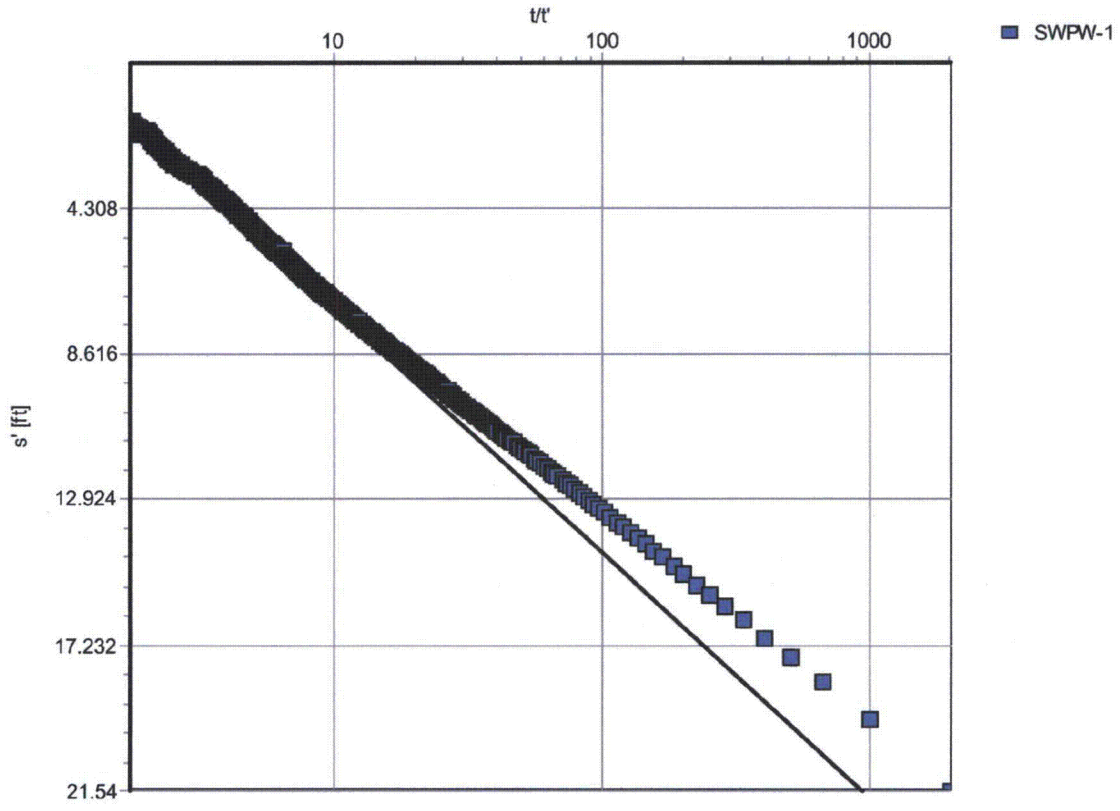

Pumping Test: **SWPW-1 Aquifer Test**

Analysis Method: **Theis Recovery**

Analysis Results:	Transmissivity:	1.31E+2 [ft²/d]	Conductivity:	1.46E+0 [ft/d]
Test parameters:	Pumping Well:	SWPW-1	Aquifer Thickness:	90 [ft]
	Casing radius:	0.1875 [ft]	Confined Aquifer	
	Screen length:	50 [ft]		
	Boring radius:	0.328125 [ft]		
	Discharge Rate:	27 [U.S. gal/min]		
	Pumping Time	10085 [min]		

Comments:

Evaluated by: KRS/HPD

Evaluation Date: 1/11/2007

Petrotek
10288 West Chatfield Ave., Ste 201
Littleton, Colorado 80127-4239
303-290-9414
www.petrotek.com

Pumping Test Analysis Report

Project: Southwest Area Regional Aquifer Test

Number: 288-18

Client: Power Resources, Inc.

SWPW-2 Aquifer Test [Theis]

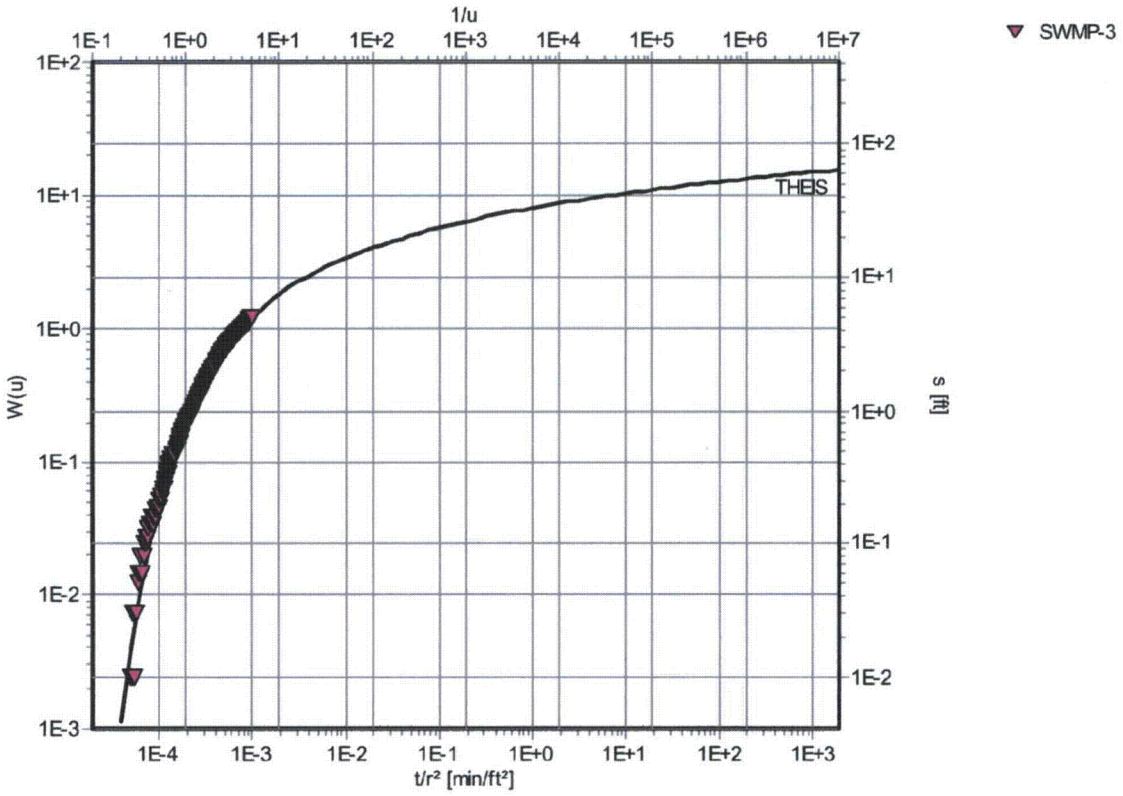

Pumping Test: **SWPW-2 Aquifer Test**

Analysis Method: **Theis**

Analysis Results:	Transmissivity:	1.00E+2 [ft²/d]	Conductivity:	1.11E+0 [ft/d]
	Storativity:	5.37E-5		
Test parameters:	Pumping Well:	SWPW-2	Aquifer Thickness:	90 [ft]
	Casing radius:	0.1875 [ft]	Confined Aquifer	
	Screen length:	100 [ft]		
	Boring radius:	0.328125 [ft]		
	Discharge Rate:	26.9 [U.S. gal/min]		

Comments:

Evaluated by: KRS/HPD

Evaluation Date: 1/4/2007

Petrotek
10288 West Chatfield Ave., Ste 201
Littleton, Colorado 80127-4239
303-290-9414
www.petrotek.com

Pumping Test Analysis Report

Project: Southwest Area Regional Aquifer Test

Number: 288-18

Client: Power Resources, Inc.

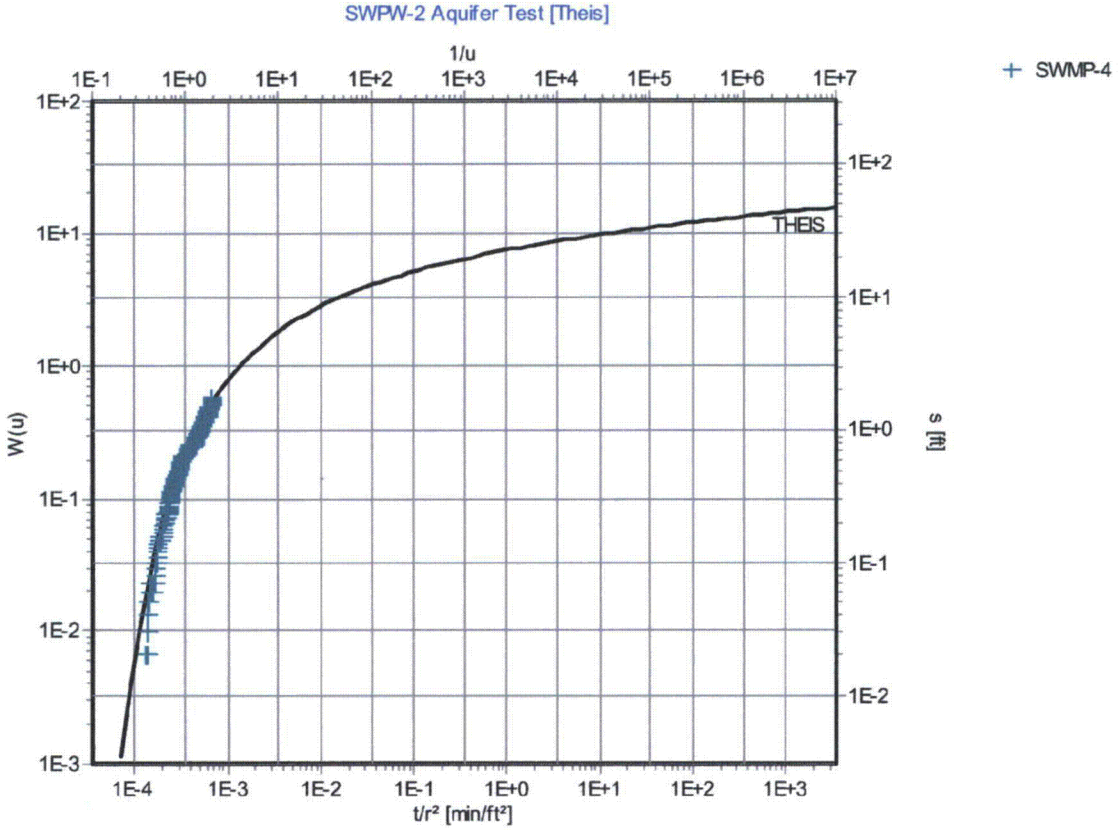

Pumping Test: **SWPW-2 Aquifer Test**

Analysis Method: **Theis**

Analysis Results:	Transmissivity:	1.35E+2 [ft²/d]	Conductivity:	1.50E+0 [ft/d]
	Storativity:	1.32E-4		
Test parameters:	Pumping Well:	SWPW-2	Aquifer Thickness:	90 [ft]
	Casing radius:	0.1875 [ft]	Confined Aquifer	
	Screen length:	100 [ft]		
	Boring radius:	0.328125 [ft]		
	Discharge Rate:	26.9 [U.S. gal/min]		

Comments:

Evaluated by: KRS/HPD

Evaluation Date: 1/4/2007

Petrotek
10288 West Chatfield Ave., Ste 201
Littleton, Colorado 80127-4239
303-290-9414
www.petrotek.com

Pumping Test Analysis Report

Project: Southwest Area Regional Aquifer Test

Number: 288-18

Client: Power Resources, Inc.

SWPW-2 Aquifer Test [Theis]

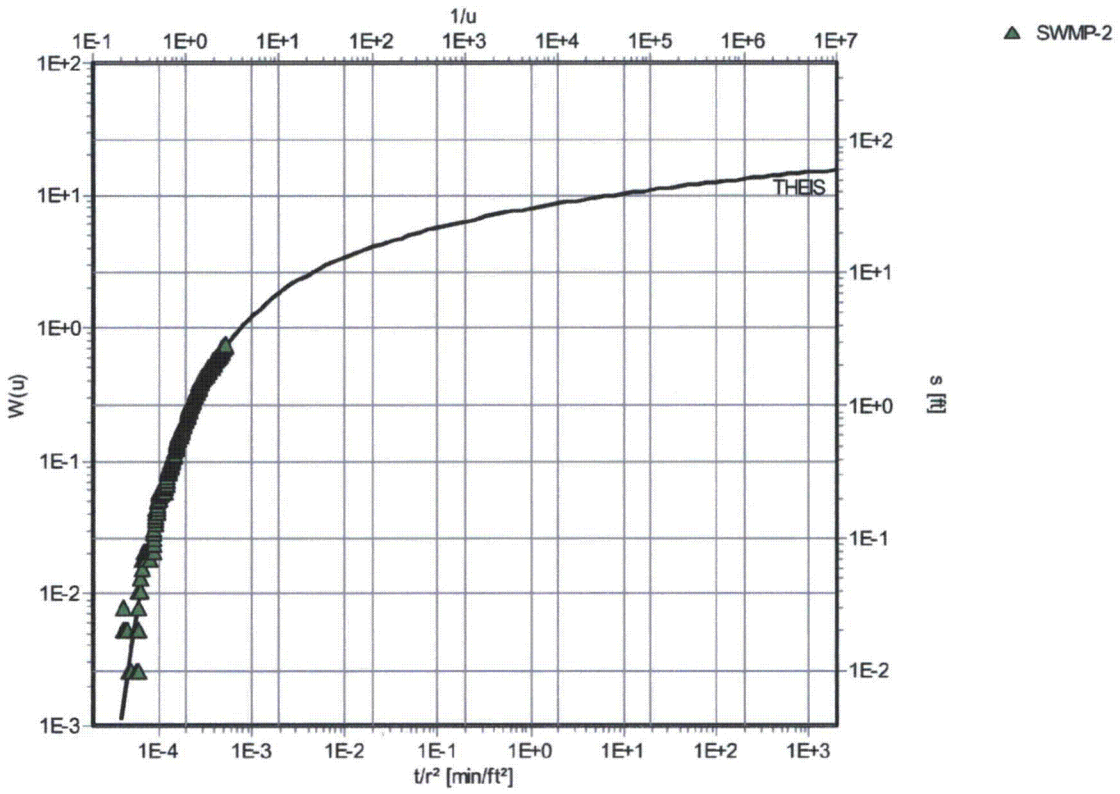

Pumping Test: **SWPW-2 Aquifer Test**

Analysis Method: **Theis**

Analysis Results:	Transmissivity:	1.07E+2 [ft²/d]	Conductivity:	1.19E+0 [ft/d]
	Storativity:	5.90E-5		
Test parameters:	Pumping Well:	SWPW-2	Aquifer Thickness:	90 [ft]
	Casing radius:	0.1875 [ft]	Confined Aquifer	
	Screen length:	100 [ft]		
	Boring radius:	0.328125 [ft]		
	Discharge Rate:	26.9 [U.S. gal/min]		

Comments:

Evaluated by: KRS/HPD

Evaluation Date: 1/4/2007

Petrotek
10288 West Chatfield Ave., Ste 201
Littleton, Colorado 80127-4239
303-290-9414
www.petrotek.com

Pumping Test Analysis Report

Project: Southwest Area Regional Aquifer Test

Number: 288-18

Client: Power Resources, Inc.

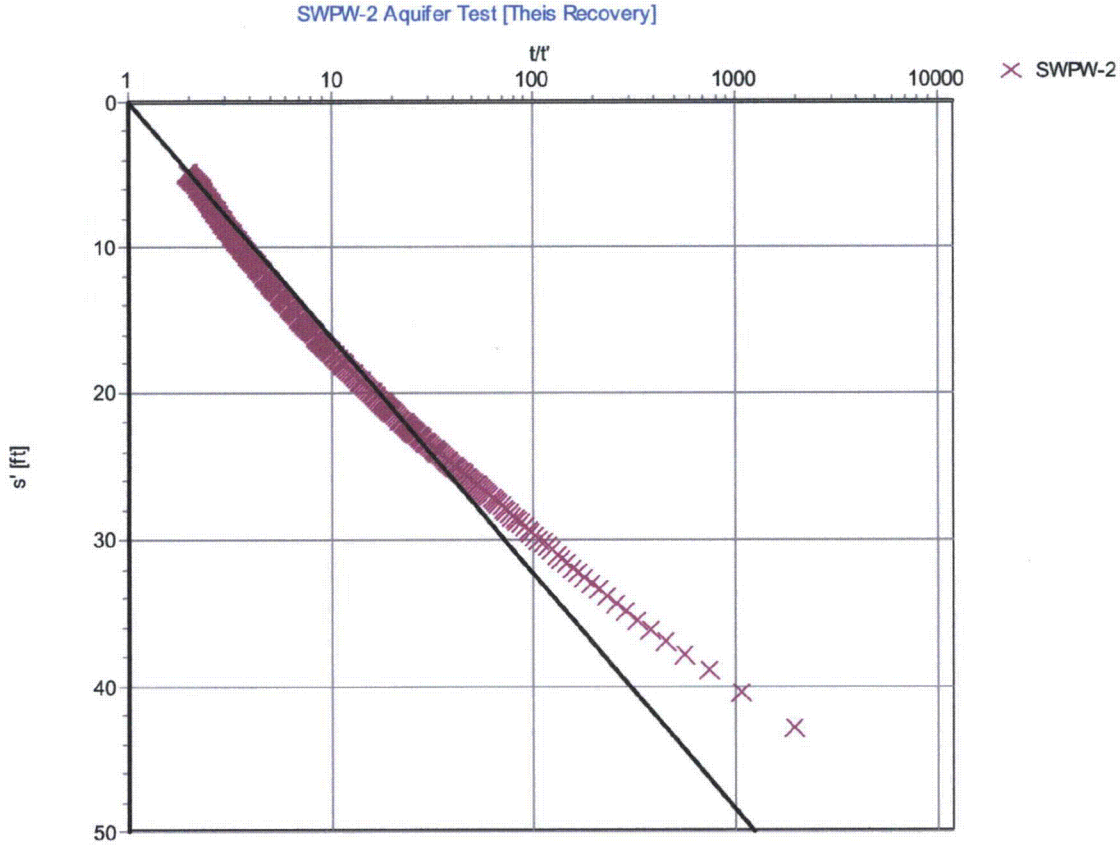

Pumping Test: **SWPW-2 Aquifer Test**

Analysis Method: **Theis Recovery**

Analysis Results:	Transmissivity:	5.86E+1 [ft²/d]	Conductivity:	6.52E-1 [ft/d]

Test parameters:	Pumping Well:	SWPW-2	Aquifer Thickness:	90 [ft]
	Casing radius:	0.1875 [ft]	Confined Aquifer	
	Screen length:	100 [ft]		
	Boring radius:	0.328125 [ft]		
	Discharge Rate:	26.9 [U.S. gal/min]		
	Pumping Time	11760 [min]		

Comments:

Evaluated by: KRS/HPD

Evaluation Date: 1/4/2007

APPENDIX D1
FIFTEEN MINUTE DEPTH TO WATER DATA
(All Monitoring Wells - Tests 1 and 2)

Power Resources, Inc.
Regional Southwest Area Aquifer Tests
Appendix D-1 - 15-minute Depth to Water Data (All Monitoring Wells)

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
8/23/06 8:00	24.69	327.91	275.63	386.74		456.45	420.90		419.09	473.32	462.41	394.38
8/23/06 8:15	24.69	327.92	275.64	386.74		456.46	420.90		419.09	473.32	462.40	394.38
8/23/06 8:30	24.69	327.92	275.64	386.74		456.46	420.90		419.09	473.32	462.41	394.38
8/23/06 8:45	24.68	327.92	275.64	386.74		456.46	420.89		419.09	473.32	462.41	394.38
8/23/06 9:00	24.68	327.92	275.65	386.75		456.46	420.89		419.10	473.32	462.41	394.37
8/23/06 9:15	24.67	327.92	275.65	386.75		456.46	420.90		419.10	473.32	462.41	394.37
8/23/06 9:30	24.66	327.93	275.65	386.76		456.47	420.90		419.10	473.33	462.41	394.38
8/23/06 9:45	24.65	327.93	275.65	386.76		456.47	420.90		419.10	473.34	462.41	394.38
8/23/06 10:00	24.65	327.93	275.66	386.76		456.47	420.90		419.11	473.34	462.41	394.37
8/23/06 10:15	24.65	327.93	275.66	386.77		456.47	420.90		419.11	473.34	462.42	394.37
8/23/06 10:30	24.64	327.94	275.66	386.76		456.47	420.91		419.11	473.34	462.42	394.38
8/23/06 10:45	24.64	327.94	275.66	386.77		456.48	420.90		419.11	473.35	462.42	394.38
8/23/06 11:00	24.62	327.94	275.66	386.77		456.47	420.91		419.12	473.35	462.42	394.38
8/23/06 11:15	24.62	327.94	275.66	386.77		456.48	420.91		419.12	473.36	462.43	394.37
8/23/06 11:30	24.61	327.94	275.66	386.78		456.47	420.91		419.12	473.36	462.42	394.37
8/23/06 11:45	24.61	327.94	275.66	386.78		456.47	420.91		419.11	473.36	462.42	394.37
8/23/06 12:00	24.60	327.94	275.66	386.76		456.48	420.91		419.12	473.37	462.43	394.37
8/23/06 12:15	24.59	327.95	275.65	386.77		456.47	420.91		419.12	473.38	462.42	394.37
8/23/06 12:30	24.58	327.94	275.66	386.77		456.47	420.91		419.12	473.38	462.42	394.37
8/23/06 12:45	24.58	327.94	275.65	386.77		456.47	420.91		419.12	473.38	462.42	394.36
8/23/06 13:00	24.57	327.94	275.66	386.77		456.47	420.90		419.12	473.39	462.42	394.36
8/23/06 13:15	24.56	327.94	275.66	386.77		456.46	420.90		419.11	473.39	462.41	394.35
8/23/06 13:30	24.56	327.93	275.65	386.76		456.45	420.89		419.12	473.40	462.41	394.36
8/23/06 13:45	24.56	327.93	275.63	386.74		456.45	420.89		419.10	473.40	462.41	394.35
8/23/06 14:00	24.55	327.93	275.64	386.76		456.45	420.88		419.12	473.40	462.40	394.35
8/23/06 14:15	24.54	327.92	275.66	386.76		456.44	420.88		419.11	473.40	462.39	394.35
8/23/06 14:30	24.53	327.92	275.63	386.74		456.43	420.87		419.10	473.40	462.39	394.34
8/23/06 14:45	24.54	327.91	275.65	386.74		456.43	420.87		419.12	473.40	462.38	394.33
8/23/06 15:00	24.53	327.91	275.62	386.75		456.43	420.86		419.09	473.40	462.38	394.33
8/23/06 15:15	24.53	327.90	275.62	386.73		456.42	420.86		419.08	473.40	462.38	394.33
8/23/06 15:30	24.52	327.90	275.62	386.73		456.44	420.87		419.08	473.40	462.37	394.33
8/23/06 15:45	24.52	327.89	275.63	386.74		456.44	420.89		419.07	473.40	462.36	394.32
8/23/06 16:00	24.52	327.89	275.60	386.74		456.44	420.90		419.08	473.40	462.36	394.32
8/23/06 16:15	24.52	327.89	275.61	386.72		456.44	420.90		419.05	473.40	462.36	394.31
8/23/06 16:30	24.52	327.89	275.60	386.71		456.44	420.90		419.06	473.39	462.35	394.31
8/23/06 16:45	24.52	327.88	275.60	386.71		456.44	420.90		419.06	473.39	462.34	394.30
8/23/06 17:00	24.52	327.87	275.60	386.71		456.43	420.90		419.06	473.39	462.34	394.29
8/23/06 17:15	24.52	327.87	275.59	386.71		456.43	420.90		419.05	473.39	462.33	394.29
8/23/06 17:30	24.52	327.86	275.59	386.71		456.43	420.90		419.05	473.38	462.33	394.30
8/23/06 17:45	24.52	327.86	275.59	386.70		456.42	420.89		419.05	473.38	462.33	394.28
8/23/06 18:00	24.53	327.85	275.59	386.70		456.42	420.89		419.04	473.38	462.33	394.28
8/23/06 18:15	24.53	327.85	275.58	386.70		456.42	420.88		419.04	473.38	462.33	394.28
8/23/06 18:30	24.53	327.85	275.58	386.71		456.41	420.88		419.04	473.38	462.32	394.28
8/23/06 18:45	24.55	327.84	275.58	386.70		456.41	420.88		419.02	473.35	462.32	394.28
8/23/06 19:00	24.56	327.85	275.58	386.71		456.42	420.89		419.05	473.36	462.31	394.28
8/23/06 19:15	24.56	327.85	275.58	386.72		456.42	420.89		419.04	473.36	462.31	394.28
8/23/06 19:30	24.55	327.84	275.58	386.72		456.41	420.88		419.04	473.37	462.30	394.28
8/23/06 19:45	24.55	327.84	275.58	386.72		456.41	420.88		419.03	473.36	462.31	394.29
8/23/06 20:00	24.56	327.84	275.58	386.72		456.41	420.88		419.03	473.36	462.31	394.30
8/23/06 20:15	24.56	327.84	275.58	386.72		456.41	420.88		419.03	473.37	462.30	394.31
8/23/06 20:30	24.56	327.84	275.58	386.73		456.41	420.88		419.03	473.37	462.30	394.32
8/23/06 20:45	24.56	327.84	275.58	386.73		456.41	420.88		419.04	473.36	462.30	394.32
8/23/06 21:00	24.57	327.84	275.58	386.74		456.41	420.88		419.04	473.36	462.30	394.33
8/23/06 21:15	24.57	327.85	275.59	386.74		456.42	420.88		419.04	473.36	462.30	394.33
8/23/06 21:30	24.57	327.85	275.59	386.75		456.42	420.88		419.04	473.36	462.30	394.33
8/23/06 21:45	24.58	327.85	275.59	386.76		456.42	420.88		419.04	473.35	462.30	394.33
8/23/06 22:00	24.58	327.85	275.60	386.77		456.43	420.89		419.05	473.36	462.33	394.34
8/23/06 22:15	24.58	327.85	275.59	386.77		456.43	420.89		419.05	473.36	462.32	394.33
8/23/06 22:30	24.58	327.85	275.59	386.77		456.43	420.89		419.05	473.37	462.32	394.32
8/23/06 22:45	24.58	327.85	275.60	386.77		456.43	420.89		419.05	473.36	462.32	394.33
8/23/06 23:00	24.58	327.85	275.60	386.78		456.43	420.89		419.05	473.36	462.32	394.33
8/23/06 23:15	24.58	327.85	275.60	386.78		456.43	420.90		419.05	473.37	462.32	394.33
8/23/06 23:30	24.58	327.86	275.60	386.79		456.44	420.90		419.05	473.37	462.32	394.33
8/23/06 23:45	24.57	327.85	275.60	386.80		456.43	420.91		419.05	473.37	462.32	394.32
8/24/06 0:00	24.56	327.85	275.60	386.80		456.43	420.90		419.05	473.38	462.31	394.32
8/24/06 0:15	24.56	327.85	275.59	386.79		456.43	420.89		419.05	473.38	462.32	394.32
8/24/06 0:30	24.56	327.85	275.59	386.79		456.43	420.89		419.05	473.38	462.32	394.32
8/24/06 0:45	24.56	327.85	275.60	386.80		456.43	420.89		419.05	473.38	462.32	394.33
8/24/06 1:00	24.55	327.85	275.60	386.80		456.43	420.89		419.05	473.39	462.30	394.32
8/24/06 1:15	24.55	327.85	275.59	386.80		456.43	420.90		419.05	473.39	462.30	394.33
8/24/06 1:30	24.55	327.85	275.59	386.80		456.43	420.89		419.05	473.38	462.30	394.32
8/24/06 1:45	24.56	327.85	275.61	386.81		456.43	420.90		419.05	473.37	462.31	394.33
8/24/06 2:00	24.56	327.85	275.59	386.82		456.43	420.90		419.05	473.37	462.31	394.33
8/24/06 2:15	24.60	327.87	275.57	386.82		456.45	420.90		419.05	473.34	462.33	394.34
8/24/06 2:30	24.58	327.86	275.61	386.82		456.44	420.90		419.06	473.36	462.31	394.33
8/24/06 2:45	24.56	327.85	275.60	386.82		456.43	420.90		419.05	473.38	462.30	394.31
8/24/06 3:00	24.55	327.84	275.59	386.82		456.42	420.89		419.04	473.38	462.30	394.30
8/24/06 3:15	24.55	327.83	275.58	386.81		456.42	420.89		419.04	473.38	462.29	394.30
8/24/06 3:30	24.54	327.83	275.58	386.81		456.41	420.88		419.03	473.38	462.28	394.30
8/24/06 3:45	24.54	327.83	275.58	386.81		456.41	420.88		419.03	473.37	462.28	394.29
8/24/06 4:00	24.55	327.83	275.58	386.81		456.40	420.88		419.03	473.37	462.28	394.30
8/24/06 4:15	24.54	327.82	275.58	386.81		456.41	420.87		419.02	473.37	462.28	394.29
8/24/06 4:30	24.54	327.82	275.57	386.81		456.40	420.87		419.02	473.37	462.27	394.29
8/24/06 4:45	24.54	327.81	275.57	386.81		456.39	420.87		419.02	473.37	462.26	394.28
8/24/06 5:00	24.53	327.81	275.57	386.81		456.39	420.86		419.01	473.37	462.26	394.28
8/24/06 5:15	24.53	327.80	275.56	386.80		456.39	420.86		419.01	473.37	462.25	394.28
8/24/06 5:30	24.53	327.80	275.56	386.81		456.39	420.86		419.01	473.37	462.25	394.26
8/24/06 5:45	24.53	327.80	275.55	386.80		456.38	420.85		419.01	473.37	462.25	394.26
8/24/06 6:00	24.53	327.80	275.55	386.81		456.38	420.85		419.00	473.36	462.25	394.26
8/24/06 6:15	24.53	327.80	275.55	386.81		456.38	420.85		419.00	473.36	462.25	394.27
8/24/06 6:30	24.54	327.80	275.55	386.81		456.38	420.85		419.01	473.35	462.26	394.27
8/24/06 6:45	24.54	327.80	275.56	386.82		456.39	420.85		419.01	473.35	462.26	394.28
8/24/06 7:00	24.55	327.80	275.56	386.82		456.39	420.85		419.01	473.35	462.26	394.28
8/24/06 7:15	24.55	327.80	275.56	386.82		456.39	420.86		419.01	473.34	462.26	394.28
8/24/06 7:30	24.55	327.80	275.57	386.83		456.39	420.86		419.01	473.34	462.26	394.28
8/24/06 7:45	24.55	327.81	275.57	386.84		456.40	420.86		419.01	473.34	462.27	394.29
8/24/06 8:00	24.55	327.81	275.58	386.84		456.40	420.87		419.02	473.34	462.26	394.29
8/24/06 8:15	24.55	327.82	275.57	386.85		456.41	420.87		419.03	473.33	462.27	394.31
8/24/06 8:30	24.55	327.82	275.58	386.86		456.41	420.88		419.03	473.33	462.28	394.31
8/24/06 8:45	24.55	327.83	275.58	386.86		456.41	420.88		419.03	473.33	462.28	394.31

Power Resources, Inc.
Regional Southwest Area Aquifer Tests
Appendix D-1 - 15-minute Depth to Water Data (All Monitoring Wells)

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
8/24/06 9:00	24.55	327.83	275.59	386.86		456.42	420.88		419.04	473.33	462.28	394.31
8/24/06 9:15	24.57	327.84	275.58	386.86		456.43	420.88		419.03	473.31	462.28	394.31
8/24/06 9:30	24.58	327.85	275.60	386.86		456.43	420.89		419.04	473.31	462.29	394.31
8/24/06 9:45	24.58	327.85	275.61	386.89		456.43	420.90		419.05	473.31	462.29	394.32
8/24/06 10:00	24.59	327.86	275.61	386.88		456.44	420.91		419.05	473.31	462.30	394.33
8/24/06 10:15	24.60	327.86	275.62	386.89		456.45	420.90		419.06	473.30	462.30	394.34
8/24/06 10:30	24.60	327.86	275.63	386.90		456.45	420.91		419.07	473.31	462.31	394.35
8/24/06 10:45	24.60	327.87	275.63	386.91		456.45	420.92		419.07	473.31	462.32	394.35
8/24/06 11:00	24.59	327.87	275.64	386.92		456.46	420.92		419.07	473.31	462.32	394.36
8/24/06 11:15	24.59	327.87	275.63	386.92		456.45	420.92		419.08	473.32	462.33	394.35
8/24/06 11:30	24.58	327.87	275.64	386.92		456.46	420.93		419.08	473.32	462.33	394.36
8/24/06 11:45	24.58	327.87	275.64	386.92		456.46	420.93		419.07	473.33	462.33	394.36
8/24/06 12:00	24.58	327.88	275.64	386.93		456.46	420.93		419.08	473.33	462.33	394.36
8/24/06 12:15	24.58	327.88	275.64	386.94		456.46	420.94		419.08	473.33	462.33	394.36
8/24/06 12:30	24.57	327.88	275.64	386.94		456.47	420.94		419.09	473.33	462.33	394.36
8/24/06 12:45	24.57	327.88	275.65	386.95		456.47	420.94		419.09	473.33	462.33	394.37
8/24/06 13:00	24.57	327.88	275.64	386.95		456.47	420.93		419.09	473.34	462.33	394.37
8/24/06 13:15	24.56	327.88	275.65	386.95		456.47	420.94		419.09	473.34	462.33	394.37
8/24/06 13:30	24.56	327.88	275.65	386.95		456.47	420.94		419.09	473.34	462.33	394.37
8/24/06 13:45	24.56	327.88	275.65	386.95		456.47	420.94		419.08	473.34	462.32	394.36
8/24/06 14:00	24.55	327.88	275.64	386.94		456.47	420.94		419.08	473.34	462.32	394.37
8/24/06 14:15	24.54	327.88	275.63	386.95		456.47	420.94		419.09	473.34	462.32	394.36
8/24/06 14:30	24.54	327.88	275.64	386.94		456.46	420.94		419.08	473.35	462.32	394.36
8/24/06 14:45	24.53	327.88	275.64	386.94		456.46	420.93		419.08	473.35	462.31	394.36
8/24/06 15:00	24.52	327.87	275.63	386.94		456.46	420.93		419.07	473.35	462.31	394.35
8/24/06 15:15	24.51	327.87	275.62	386.94		456.46	420.93		419.07	473.35	462.30	394.35
8/24/06 15:30	24.51	327.87	275.62	386.93		456.45	420.92		419.07	473.35	462.30	394.35
8/24/06 15:45	24.51	327.86	275.62	386.93		456.45	420.92		419.06	473.35	462.30	394.34
8/24/06 16:00	24.50	327.86	275.61	386.92		456.44	420.92		419.06	473.35	462.30	394.33
8/24/06 16:15	24.49	327.85	275.61	386.92		456.44	420.91		419.05	473.35	462.29	394.33
8/24/06 16:30	24.49	327.85	275.61	386.91		456.43	420.90		419.05	473.35	462.28	394.33
8/24/06 16:45	24.49	327.84	275.60	386.91		456.43	420.90		419.04	473.34	462.28	394.33
8/24/06 17:00	24.49	327.84	275.60	386.91		456.43	420.90		419.05	473.34	462.28	394.33
8/24/06 17:15	24.49	327.84	275.59	386.90		456.42	420.90		419.04	473.34	462.27	394.33
8/24/06 17:30	24.49	327.83	275.60	386.90		456.42	420.89		419.04	473.34	462.27	394.33
8/24/06 17:45	24.49	327.83	275.59	386.90		456.42	420.89		419.04	473.34	462.27	394.33
8/24/06 18:00	24.49	327.82	275.59	386.90		456.41	420.88		419.03	473.33	462.26	394.32
8/24/06 18:15	24.50	327.82	275.59	386.89		456.41	420.88		419.03	473.33	462.26	394.32
8/24/06 18:30	24.50	327.82	275.59	386.89		456.41	420.88		419.03	473.32	462.25	394.32
8/24/06 18:45	24.50	327.82	275.59	386.89		456.41	420.88		419.03	473.32	462.25	394.32
8/24/06 19:00	24.51	327.82	275.58	386.88		456.41	420.88		419.02	473.32	462.25	394.32
8/24/06 19:15	24.52	327.82	275.58	386.89		456.41	420.88		419.02	473.31	462.25	394.31
8/24/06 19:30	24.53	327.82	275.58	386.89		456.41	420.88		419.02	473.31	462.25	394.32
8/24/06 19:45	24.54	327.82	275.59	386.89		456.41	420.88		419.03	473.30	462.25	394.33
8/24/06 20:00	24.55	327.82	275.59	386.89		456.41	420.88		419.03	473.30	462.25	394.33
8/24/06 20:15	24.56	327.83	275.59	386.89		456.41	420.88		419.03	473.29	462.24	394.32
8/24/06 20:30	24.58	327.83	275.60	386.90		456.42	420.89		419.04	473.29	462.26	394.33
8/24/06 20:45	24.59	327.83	275.60	386.90		456.42	420.89		419.04	473.29	462.26	394.33
8/24/06 21:00	24.60	327.83	275.61	386.91		456.42	420.89		419.04	473.28	462.26	394.34
8/24/06 21:15	24.61	327.84	275.61	386.91		456.43	420.90		419.04	473.28	462.26	394.34
8/24/06 21:30	24.61	327.84	275.61	386.92		456.43	420.90		419.05	473.28	462.27	394.35
8/24/06 21:45	24.62	327.84	275.62	386.92		456.43	420.90		419.05	473.28	462.27	394.35
8/24/06 22:00	24.62	327.85	275.62	386.92		456.43	420.90		419.05	473.28	462.27	394.35
8/24/06 22:15	24.62	327.85	275.62	386.93		456.44	420.91		419.05	473.28	462.28	394.35
8/24/06 22:30	24.63	327.85	275.62	386.93		456.44	420.91		419.06	473.28	462.28	394.36
8/24/06 22:45	24.62	327.85	275.62	386.94		456.44	420.91		419.06	473.29	462.28	394.35
8/24/06 23:00	24.63	327.85	275.63	386.93		456.44	420.91		419.06	473.29	462.28	394.36
8/24/06 23:15	24.63	327.85	275.63	386.94		456.44	420.91		419.06	473.29	462.28	394.36
8/24/06 23:30	24.63	327.86	275.63	386.94		456.44	420.91		419.06	473.29	462.28	394.36
8/24/06 23:45	24.64	327.86	275.63	386.94		456.45	420.92		419.06	473.29	462.28	394.37
8/25/06 0:00	24.65	327.86	275.64	386.95		456.45	420.92		419.07	473.28	462.28	394.36
8/25/06 0:15	24.65	327.87	275.64	386.95		456.46	420.92		419.07	473.28	462.28	394.38
8/25/06 0:30	24.65	327.87	275.64	386.96		456.46	420.93		419.07	473.29	462.28	394.38
8/25/06 0:45	24.65	327.87	275.65	386.96		456.46	420.93		419.07	473.29	462.28	394.38
8/25/06 1:00	24.64	327.87	275.65	386.96		456.46	420.93		419.08	473.29	462.28	394.37
8/25/06 1:15	24.64	327.87	275.65	386.96		456.46	420.93		419.07	473.29	462.28	394.38
8/25/06 1:30	24.64	327.87	275.65	386.96		456.46	420.93		419.07	473.29	462.28	394.38
8/25/06 1:45	24.65	327.87	275.65	386.96		456.46	420.93		419.07	473.29	462.28	394.37
8/25/06 2:00	24.65	327.87	275.65	386.96		456.46	420.93		419.07	473.29	462.29	394.38
8/25/06 2:15	24.64	327.87	275.65	386.96		456.46	420.93		419.07	473.29	462.29	394.37
8/25/06 2:30	24.64	327.87	275.64	386.96		456.45	420.93		419.07	473.30	462.28	394.37
8/25/06 2:45	24.63	327.87	275.64	386.96		456.45	420.93		419.07	473.30	462.28	394.36
8/25/06 3:00	24.63	327.86	275.64	386.95		456.45	420.92		419.07	473.30	462.28	394.36
8/25/06 3:15	24.63	327.86	275.64	386.95		456.45	420.92		419.06	473.30	462.28	394.36
8/25/06 3:30	24.63	327.86	275.64	386.95		456.44	420.92		419.06	473.30	462.26	394.36
8/25/06 3:45	24.62	327.85	275.64	386.94		456.44	420.91		419.06	473.29	462.26	394.36
8/25/06 4:00	24.62	327.85	275.63	386.94		456.44	420.91		419.06	473.29	462.25	394.36
8/25/06 4:15	24.61	327.85	275.63	386.94		456.44	420.91		419.06	473.29	462.25	394.36
8/25/06 4:30	24.61	327.85	275.63	386.94		456.44	420.91		419.05	473.29	462.25	394.35
8/25/06 4:45	24.61	327.85	275.62	386.94		456.43	420.90		419.05	473.29	462.25	394.35
8/25/06 5:00	24.61	327.84	275.62	386.93		456.43	420.90		419.04	473.29	462.25	394.34
8/25/06 5:15	24.61	327.84	275.62	386.93		456.42	420.90		419.04	473.29	462.24	394.34
8/25/06 5:30	24.61	327.84	275.62	386.93		456.42	420.90		419.04	473.29	462.24	394.33
8/25/06 5:45	24.61	327.84	275.62	386.93		456.42	420.90		419.04	473.28	462.24	394.34
8/25/06 6:00	24.61	327.84	275.62	386.92		456.42	420.89		419.03	473.28	462.24	394.34
8/25/06 6:15	24.61	327.83	275.62	386.92		456.42	420.89		419.04	473.27	462.24	394.33
8/25/06 6:30	24.61	327.83	275.61	386.92		456.42	420.89		419.03	473.28	462.23	394.33
8/25/06 6:45	24.61	327.83	275.62	386.92		456.42	420.89		419.04	473.27	462.23	394.34
8/25/06 7:00	24.61	327.83	275.61	386.92		456.42	420.89		419.03	473.27	462.23	394.33
8/25/06 7:15	24.61	327.83	275.62	386.93		456.42	420.89		419.03	473.27	462.23	394.34
8/25/06 7:30	24.62	327.83	275.62	386.93		456.42	420.89		419.04	473.27	462.24	394.34
8/25/06 7:45	24.62	327.84	275.62	386.93		456.42	420.89		419.03	473.26	462.24	394.34
8/25/06 8:00	24.62	327.84	275.62	386.93		456.42	420.89		419.04	473.26	462.24	394.34
8/25/06 8:15	24.63	327.84	275.62	386.94		456.42	420.90		419.04	473.26	462.24	394.35
8/25/06 8:30	24.62	327.84	275.62	386.94		456.43	420.90		419.04	473.26	462.24	394.35
8/25/06 8:45	24.63	327.85	275.63	386.94		456.43	420.90		419.05	473.26	462.25	394.36
8/25/06 9:00	24.63	327.85	275.63	386.94		456.43	420.90		419.04	473.26	462.25	394.36
8/25/06 9:15	24.64	327.85	275.63	386.94		456.43	420.91		419.05	473.25	462.25	394.36
8/25/06 9:30	24.65	327.85	275.63	386.93		456.43	420.91		419.05	473.24	462.25	394.36
8/25/06 9:45	24.66	327.86	275.64	386.95		456.45	420.91		419.06	473.23	462.27	394.37

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
8/25/06 10:00	24.66	327.87	275.65	386.96		456.45	420.92		419.07	473.23	462.27	394.38
8/25/06 10:15	24.67	327.87	275.66	386.96		456.46	420.92		419.07	473.24	462.27	394.38
8/25/06 10:30	24.65	327.87	275.66	386.96		456.46	420.93		419.08	473.26	462.26	394.38
8/25/06 10:45	24.65	327.87	275.64	386.96		456.45	420.92		419.07	473.26	462.27	394.38
8/25/06 11:00	24.64	327.87	275.65	386.96		456.45	420.93		419.06	473.27	462.26	394.38
8/25/06 11:15	24.65	327.87	275.66	386.97		456.46	420.93		418.98	473.26	462.26	394.38
8/25/06 11:30	24.64	327.87	275.66	386.97		456.46	420.93		418.93	473.27	462.27	394.38
8/25/06 11:45	24.65	327.87	275.67	386.99		456.46	420.93		418.90	473.27	462.27	394.39
8/25/06 12:00	24.64	327.88	275.67	386.99		456.47	420.94		418.90	473.27	462.28	394.39
8/25/06 12:15	24.64	327.88	275.67	386.99		456.47	420.94		419.01	473.27	462.28	394.39
8/25/06 12:30	24.62	327.88	275.67	386.99		456.47	420.94		419.08	473.28	462.28	394.39
8/25/06 12:45	24.62	327.88	275.67	386.99		456.47	420.94		419.11	473.28	462.28	394.38
8/25/06 13:00	24.61	327.89	275.67	386.99		456.47	420.94		419.15	473.29	462.28	394.39
8/25/06 13:15	24.60	327.88	275.68	386.99		456.47	420.94		419.16	473.29	462.28	394.39
8/25/06 13:30	24.60	327.89	275.68	387.00		456.47	420.94		419.11	473.29	462.28	394.39
8/25/06 13:45	24.60	327.89	275.68	386.99		456.48	420.94		419.09	473.29	462.28	394.40
8/25/06 14:00	24.59	327.89	275.68	386.99		456.48	420.95		419.09	473.29	462.29	394.39
8/25/06 14:15	24.59	327.89	275.68	386.98		456.48	420.94		418.94	473.29	462.29	394.38
8/25/06 14:30	24.58	327.89	275.67	386.98		456.47	420.94		418.95	473.29	462.29	394.39
8/25/06 14:45	24.58	327.89	275.68	386.98		456.47	420.94		418.95	473.29	462.28	394.39
8/25/06 15:00	24.56	327.88	275.67	386.98		456.47	420.94		418.96	473.30	462.28	394.38
8/25/06 15:15	24.56	327.88	275.67	386.97		456.46	420.94		418.97	473.30	462.28	394.38
8/25/06 15:30	24.56	327.88	275.66	386.97		456.46	420.93		418.97	473.30	462.27	394.38
8/25/06 15:45	24.55	327.87	275.66	386.97		456.46	420.93		418.98	473.30	462.26	394.38
8/25/06 16:00	24.55	327.87	275.66	386.96		456.45	420.92		418.98	473.30	462.26	394.38
8/25/06 16:15	24.55	327.86	275.65	386.96		456.45	420.92		418.97	473.30	462.25	394.38
8/25/06 16:30	24.55	327.86	275.65	386.96		456.45	420.92		418.98	473.30	462.25	394.37
8/25/06 16:45	24.55	327.86	275.64	386.95		456.44	420.92		418.98	473.29	462.25	394.37
8/25/06 17:00	24.54	327.86	275.64	386.94		456.44	420.92		418.98	473.30	462.25	394.36
8/25/06 17:15	24.55	327.85	275.64	386.94		456.44	420.91		418.97	473.29	462.25	394.36
8/25/06 17:30	24.55	327.85	275.64	386.93		456.43	420.91		418.96	473.29	462.25	394.36
8/25/06 17:45	24.57	327.84	275.64	386.93		456.43	420.90		418.96	473.28	462.23	394.36
8/25/06 18:00	24.57	327.85	275.64	386.93		456.44	420.90		418.96	473.28	462.24	394.35
8/25/06 18:15	24.58	327.85	275.64	386.93		456.43	420.90		418.96	473.28	462.23	394.36
8/25/06 18:30	24.59	327.85	275.64	386.93		456.43	420.90		418.96	473.27	462.24	394.36
8/25/06 18:45	24.61	327.85	275.64	386.93		456.43	420.90		418.96	473.25	462.24	394.36
8/25/06 19:00	24.63	327.86	275.65	386.94		456.44	420.91		418.97	473.24	462.25	394.37
8/25/06 19:15	24.64	327.86	275.65	386.94		456.44	420.91		418.98	473.23	462.25	394.38
8/25/06 19:30	24.66	327.87	275.66	386.95		456.45	420.92		418.99	473.22	462.25	394.38
8/25/06 19:45	24.68	327.87	275.66	386.95		456.46	420.92		418.98	473.21	462.26	394.38
8/25/06 20:00	24.67	327.87	275.66	386.95		456.46	420.93		419.00	473.22	462.26	394.38
8/25/06 20:15	24.68	327.87	275.66	386.95		456.46	420.92		419.00	473.21	462.25	394.38
8/25/06 20:30	24.70	327.87	275.67	386.95		456.45	420.92		418.99	473.20	462.25	394.38
8/25/06 20:45	24.68	327.87	275.67	386.96		456.46	420.93		418.99	473.21	462.25	394.38
8/25/06 21:00	24.69	327.87	275.67	386.95		456.46	420.92		418.99	473.21	462.25	394.38
8/25/06 21:15	24.69	327.87	275.67	386.96		456.46	420.93		418.99	473.21	462.25	394.38
8/25/06 21:30	24.70	327.87	275.67	386.96		456.46	420.93		418.99	473.21	462.26	394.38
8/25/06 21:45	24.69	327.87	275.67	386.96		456.46	420.93		418.99	473.21	462.25	394.38
8/25/06 22:00	24.68	327.87	275.67	386.96		456.46	420.93		418.99	473.22	462.25	394.38
8/25/06 22:15	24.69	327.87	275.67	386.96		456.46	420.93		418.99	473.22	462.25	394.38
8/25/06 22:30	24.69	327.88	275.67	386.96		456.46	420.93		418.99	473.22	462.26	394.39
8/25/06 22:45	24.68	327.88	275.68	386.97		456.46	420.93		418.99	473.22	462.26	394.38
8/25/06 23:00	24.69	327.88	275.68	386.97		456.46	420.93		418.99	473.23	462.26	394.38
8/25/06 23:15	24.69	327.88	275.68	386.97		456.47	420.94		418.99	473.23	462.27	394.39
8/25/06 23:30	24.69	327.88	275.68	386.97		456.47	420.94		418.99	473.23	462.27	394.39
8/25/06 23:45	24.70	327.89	275.69	386.98		456.48	420.94		418.99	473.22	462.28	394.40
8/26/06 0:00	24.70	327.89	275.69	386.98		456.48	420.95		419.00	473.22	462.28	394.41
8/26/06 0:15	24.71	327.89	275.70	386.98		456.48	420.95		419.00	473.22	462.28	394.41
8/26/06 0:30	24.70	327.89	275.70	386.99		456.49	420.95		419.00	473.23	462.28	394.41
8/26/06 0:45	24.70	327.90	275.70	386.98		456.49	420.95		419.00	473.23	462.28	394.41
8/26/06 1:00	24.70	327.90	275.70	386.99		456.49	420.96		419.00	473.23	462.28	394.41
8/26/06 1:15	24.70	327.90	275.70	386.99		456.49	420.96		419.00	473.24	462.28	394.41
8/26/06 1:30	24.70	327.90	275.70	386.99		456.49	420.95		419.00	473.24	462.28	394.41
8/26/06 1:45	24.70	327.90	275.70	386.99		456.49	420.95		419.00	473.24	462.28	394.41
8/26/06 2:00	24.69	327.89	275.70	386.99		456.48	420.95		419.00	473.25	462.28	394.41
8/26/06 2:15	24.69	327.90	275.69	386.98		456.48	420.95		419.00	473.25	462.28	394.41
8/26/06 2:30	24.69	327.90	275.70	386.98		456.48	420.95		419.00	473.24	462.28	394.41
8/26/06 2:45	24.69	327.90	275.70	386.98		456.48	420.95		419.00	473.24	462.28	394.41
8/26/06 3:00	24.69	327.90	275.70	386.98		456.48	420.95		419.00	473.25	462.28	394.40
8/26/06 3:15	24.69	327.89	275.70	386.98		456.48	420.95		419.00	473.25	462.27	394.40
8/26/06 3:30	24.69	327.89	275.69	386.98		456.48	420.95		418.99	473.25	462.27	394.39
8/26/06 3:45	24.69	327.89	275.69	386.98		456.48	420.95		418.99	473.24	462.27	394.39
8/26/06 4:00	24.69	327.89	275.69	386.98		456.48	420.95		418.99	473.24	462.27	394.39
8/26/06 4:15	24.69	327.89	275.69	386.98		456.47	420.94		418.99	473.24	462.26	394.39
8/26/06 4:30	24.69	327.89	275.69	386.98		456.47	420.94		418.99	473.24	462.26	394.39
8/26/06 4:45	24.69	327.89	275.69	386.97		456.47	420.94		418.99	473.23	462.26	394.39
8/26/06 5:00	24.69	327.88	275.69	386.97		456.47	420.94		418.98	473.23	462.26	394.39
8/26/06 5:15	24.69	327.88	275.68	386.97		456.47	420.94		418.98	473.23	462.26	394.38
8/26/06 5:30	24.69	327.88	275.68	386.97		456.46	420.94		418.98	473.23	462.25	394.38
8/26/06 5:45	24.69	327.88	275.68	386.96		456.46	420.93		418.98	473.22	462.25	394.39
8/26/06 6:00	24.69	327.88	275.68	386.96		456.46	420.93		418.98	473.22	462.25	394.38
8/26/06 6:15	24.70	327.87	275.68	386.96		456.46	420.93		418.97	473.22	462.25	394.38
8/26/06 6:30	24.70	327.88	275.68	386.96		456.46	420.93		418.97	473.21	462.25	394.38
8/26/06 6:45	24.71	327.87	275.68	386.96		456.46	420.93		418.97	473.21	462.25	394.38
8/26/06 7:00	24.71	327.88	275.68	386.96		456.46	420.93		418.97	473.21	462.25	394.38
8/26/06 7:15	24.71	327.88	275.68	386.96		456.46	420.93		418.97	473.21	462.25	394.38
8/26/06 7:30	24.71	327.88	275.68	386.96		456.46	420.93		418.97	473.20	462.25	394.38
8/26/06 7:45	24.71	327.88	275.68	386.96		456.46	420.93		418.97	473.20	462.25	394.38
8/26/06 8:00	24.71	327.87	275.68	386.96		456.46	420.93		418.97	473.20	462.25	394.38
8/26/06 8:15	24.71	327.87	275.68	386.96		456.46	420.93		418.97	473.20	462.25	394.38
8/26/06 8:30	24.71	327.88	275.68	386.96		456.46	420.93		418.97	473.20	462.25	394.38
8/26/06 8:45	24.71	327.88	275.68	386.97		456.46	420.93		418.97	473.19	462.25	394.39
8/26/06 9:00	24.72	327.88	275.69	386.97		456.46	420.93		418.98	473.19	462.25	394.39
8/26/06 9:15	24.72	327.88	275.69	386.97		456.47	420.94		418.97	473.20	462.25	394.39
8/26/06 9:30	24.72	327.89	275.69	386.97		456.47	420.94		418.98	473.20	462.25	394.39
8/26/06 9:45	24.72	327.89	275.69	386.97		456.47	420.94		418.98	473.20	462.25	394.40
8/26/06 10:00	24.70	327.89	275.68	386.98		456.47	420.94		418.99	473.21	462.25	394.39
8/26/06 10:15	24.70	327.89	275.70	386.97		456.47	420.94		418.97	473.21	462.26	394.39
8/26/06 10:30	24.70	327.89	275.70	386.97		456.47	420.94		418.97	473.21	462.25	394.40
8/26/06 10:45	24.70	327.89	275.70	386.98		456.48	420.94		418.98	473.21	462.26	394.40

Power Resources, Inc.
Regional Southwest Area Aquifer Tests
Appendix D-1 - 15-minute Depth to Water Data (All Monitoring Wells)

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
8/26/06 11:00	24.70	327.89	275.69	386.98		456.48	420.95		418.98	473.22	462.26	394.40
8/26/06 11:15	24.70	327.90	275.71	386.99		456.48	420.95		418.99	473.22	462.27	394.40
8/26/06 11:30	24.70	327.90	275.72	386.99		456.48	420.95		418.98	473.22	462.27	394.41
8/26/06 11:45	24.69	327.90	275.72	387.00		456.49	420.95		418.98	473.23	462.28	394.41
8/26/06 12:00	24.68	327.90	275.70	386.99		456.49	420.95		418.97	473.23	462.27	394.41
8/26/06 12:15	24.67	327.91	275.70	386.99		456.49	420.96		418.97	473.23	462.28	394.41
8/26/06 12:30	24.66	327.91	275.72	386.99		456.49	420.96		418.98	473.23	462.27	394.41
8/26/06 12:45	24.66	327.91	275.71	386.99		456.49	420.96		418.99	473.24	462.28	394.42
8/26/06 13:00	24.66	327.91	275.71	386.98		456.49	420.96		419.00	473.24	462.27	394.41
8/26/06 13:15	24.66	327.91	275.71	386.98		456.49	420.96		419.00	473.25	462.28	394.41
8/26/06 13:30	24.66	327.91	275.71	386.98		456.49	420.96		419.00	473.25	462.28	394.41
8/26/06 13:45	24.66	327.91	275.71	387.00		456.49	420.96		418.99	473.26	462.27	394.41
8/26/06 14:00	24.65	327.91	275.71	386.98		456.49	420.96		418.98	473.26	462.26	394.41
8/26/06 14:15	24.65	327.90	275.71	386.97		456.49	420.96		419.01	473.26	462.27	394.41
8/26/06 14:30	24.65	327.90	275.71	386.97		456.49	420.96		419.00	473.26	462.26	394.41
8/26/06 14:45	24.65	327.90	275.71	386.98		456.49	420.96		419.00	473.26	462.27	394.40
8/26/06 15:00	24.65	327.90	275.71	386.98		456.49	420.96		418.99	473.26	462.27	394.41
8/26/06 15:15	24.65	327.90	275.71	386.99		456.48	420.96		418.99	473.26	462.26	394.41
8/26/06 15:30	24.63	327.90	275.71	386.98		456.48	420.95		418.99	473.27	462.25	394.40
8/26/06 15:45	24.63	327.89	275.70	386.97		456.48	420.95		418.99	473.27	462.26	394.39
8/26/06 16:00	24.63	327.90	275.70	386.96		456.48	420.95		419.00	473.26	462.27	394.40
8/26/06 16:15	24.63	327.89	275.70	386.97		456.48	420.95		419.01	473.26	462.25	394.39
8/26/06 16:30	24.62	327.89	275.69	386.96		456.47	420.95		419.00	473.27	462.25	394.38
8/26/06 16:45	24.62	327.88	275.69	386.95		456.46	420.94		419.00	473.27	462.25	394.38
8/26/06 17:00	24.64	327.88	275.69	386.95		456.47	420.94		418.99	473.26	462.25	394.38
8/26/06 17:15	24.65	327.89	275.70	386.95		456.47	420.94		419.00	473.25	462.25	394.39
8/26/06 17:30	24.65	327.88	275.69	386.95		456.46	420.94		419.00	473.25	462.25	394.39
8/26/06 17:45	24.66	327.88	275.69	386.95		456.47	420.94		419.00	473.24	462.25	394.39
8/26/06 18:00	24.68	327.89	275.70	386.95		456.47	420.94		419.00	473.23	462.25	394.39
8/26/06 18:15	24.69	327.89	275.70	386.95		456.47	420.94		418.98	473.22	462.25	394.39
8/26/06 18:30	24.70	327.88	275.70	386.91		456.47	420.94		417.77	473.21	462.25	394.39
8/26/06 18:45	24.72	327.90	275.67	386.80		456.47	420.93		417.68	473.20	462.25	394.39
8/26/06 19:00	24.72	327.89	275.69	386.70		456.44	420.90		417.73	473.20	462.24	394.39
8/26/06 19:15	24.70	327.89	275.69	386.67		456.44	420.91		417.74	473.21	462.22	394.38
8/26/06 19:30	24.71	327.89	275.68	386.63		456.43	420.90		417.76	473.20	462.22	394.36
8/26/06 19:45	24.68	327.91	275.68	386.63		456.44	420.92		417.79	473.22	462.20	394.36
8/26/06 20:00	24.65	327.89	275.66	386.61		456.42	420.92		417.79	473.21	462.20	394.36
8/26/06 20:15	24.70	327.85	275.68	386.61		456.40	420.90		417.78	473.20	462.21	394.36
8/26/06 20:30	24.71	327.85	275.67	386.61		456.42	420.91		417.78	473.19	462.21	394.36
8/26/06 20:45	24.71	327.85	275.67	386.60		456.42	420.90		417.77	473.19	462.22	394.36
8/26/06 21:00	24.72	327.85	275.67	386.61		456.43	420.90		417.78	473.19	462.22	394.37
8/26/06 21:15	24.72	327.85	275.68	386.63		456.43	420.90		417.78	473.19	462.22	394.36
8/26/06 21:30	24.72	327.86	275.68	386.62		456.44	420.90		417.78	473.19	462.22	394.36
8/26/06 21:45	24.72	327.86	275.68	386.61		456.44	420.90		417.79	473.20	462.22	394.36
8/26/06 22:00	24.73	327.86	275.68	386.60		456.44	420.89		417.79	473.19	462.22	394.35
8/26/06 22:15	24.73	327.87	275.69	386.59		456.45	420.90		417.79	473.19	462.22	394.35
8/26/06 22:30	24.74	327.87	275.69	386.60		456.45	420.91		417.80	473.19	462.23	394.35
8/26/06 22:45	24.73	327.87	275.69	386.60		456.45	420.91		417.80	473.19	462.23	394.35
8/26/06 23:00	24.73	327.87	275.69	386.60		456.45	420.92		417.81	473.20	462.23	394.36
8/26/06 23:15	24.72	327.87	275.69	386.61		456.45	420.93		417.82	473.20	462.23	394.36
8/26/06 23:30	24.72	327.87	275.69	386.61		456.45	420.93		417.82	473.21	462.23	394.36
8/26/06 23:45	24.73	327.87	275.70	386.60		456.46	420.93		417.82	473.20	462.24	394.37
8/27/06 0:00	24.73	327.88	275.70	386.61		456.46	420.93		417.82	473.20	462.24	394.36
8/27/06 0:15	24.73	327.88	275.70	386.61		456.46	420.93		417.83	473.21	462.24	394.37
8/27/06 0:30	24.73	327.88	275.70	386.63		456.46	420.94		417.84	473.21	462.24	394.38
8/27/06 0:45	24.73	327.88	275.71	386.64		456.46	420.94		417.83	473.21	462.25	394.37
8/27/06 1:00	24.72	327.88	275.70	386.66		456.46	420.95		417.84	473.22	462.24	394.38
8/27/06 1:15	24.71	327.88	275.70	386.68		456.46	420.95		417.84	473.23	462.25	394.38
8/27/06 1:30	24.71	327.88	275.70	386.70		456.46	420.95		417.84	473.23	462.24	394.38
8/27/06 1:45	24.71	327.88	275.70	386.72		456.46	420.95		417.85	473.23	462.24	394.38
8/27/06 2:00	24.72	327.88	275.71	386.73		456.46	420.95		417.85	473.23	462.24	394.38
8/27/06 2:15	24.71	327.88	275.71	386.74		456.46	420.95		417.84	473.23	462.24	394.38
8/27/06 2:30	24.72	327.88	275.71	386.74		456.47	420.95		417.84	473.23	462.25	394.39
8/27/06 2:45	24.71	327.88	275.71	386.76		456.46	420.96		417.85	473.23	462.25	394.38
8/27/06 3:00	24.71	327.88	275.70	386.76		456.46	420.96		417.85	473.24	462.24	394.38
8/27/06 3:15	24.71	327.88	275.70	386.76		456.46	420.95		417.84	473.23	462.24	394.38
8/27/06 3:30	24.71	327.88	275.70	386.75		456.46	420.95		417.84	473.23	462.24	394.38
8/27/06 3:45	24.72	327.88	275.70	386.75		456.46	420.95		417.84	473.23	462.24	394.38
8/27/06 4:00	24.71	327.88	275.70	386.75		456.46	420.95		417.84	473.23	462.24	394.38
8/27/06 4:15	24.71	327.88	275.70	386.74		456.46	420.95		417.83	473.23	462.23	394.38
8/27/06 4:30	24.72	327.88	275.70	386.74		456.46	420.94		417.83	473.23	462.23	394.38
8/27/06 4:45	24.72	327.87	275.70	386.74		456.45	420.94		417.83	473.23	462.23	394.38
8/27/06 5:00	24.72	327.87	275.70	386.74		456.45	420.94		417.83	473.22	462.22	394.38
8/27/06 5:15	24.72	327.87	275.70	386.73		456.45	420.94		417.82	473.22	462.22	394.38
8/27/06 5:30	24.72	327.87	275.70	386.73		456.45	420.94		417.82	473.22	462.22	394.37
8/27/06 5:45	24.72	327.87	275.70	386.73		456.45	420.93		417.82	473.21	462.22	394.37
8/27/06 6:00	24.72	327.87	275.69	386.72		456.45	420.93		417.81	473.21	462.22	394.37
8/27/06 6:15	24.72	327.87	275.69	386.72		456.45	420.93		417.81	473.21	462.22	394.37
8/27/06 6:30	24.72	327.87	275.69	386.72		456.44	420.92		417.81	473.21	462.22	394.37
8/27/06 6:45	24.72	327.86	275.69	386.72		456.44	420.92		417.80	473.20	462.22	394.37
8/27/06 7:00	24.73	327.86	275.69	386.72		456.44	420.91		417.80	473.20	462.22	394.37
8/27/06 7:15	24.73	327.87	275.69	386.71		456.44	420.91		417.79	473.19	462.22	394.37
8/27/06 7:30	24.73	327.87	275.69	386.71		456.44	420.91		417.78	473.19	462.22	394.36
8/27/06 7:45	24.74	327.86	275.69	386.72		456.44	420.91		417.78	473.19	462.22	394.37
8/27/06 8:00	24.74	327.86	275.69	386.72		456.44	420.91		417.78	473.19	462.22	394.36
8/27/06 8:15	24.74	327.86	275.69	386.72		456.44	420.90		417.77	473.18	462.22	394.37
8/27/06 8:30	24.75	327.87	275.69	386.71		456.44	420.90		417.77	473.18	462.22	394.36
8/27/06 8:45	24.74	327.87	275.69	386.71		456.44	420.90		417.76	473.18	462.22	394.36
8/27/06 9:00	24.74	327.87	275.68	386.71		456.44	420.90		417.76	473.18	462.21	394.36
8/27/06 9:15	24.74	327.86	275.69	386.71		456.43	420.90		417.77	473.18	462.22	394.36
8/27/06 9:30	24.75	327.86	275.69	386.70		456.43	420.90		417.76	473.17	462.22	394.36
8/27/06 9:45	24.75	327.86	275.69	386.70		456.42	420.90		417.76	473.17	462.22	394.36
8/27/06 10:00	24.75	327.86	275.69	386.69		456.42	420.90		417.77	473.17	462.22	394.36
8/27/06 10:15	24.75	327.86	275.69	386.69		456.42	420.90		417.76	473.17	462.21	394.36
8/27/06 10:30	24.75	327.86	275.69	386.69		456.42	420.90		417.77	473.17	462.22	394.36
8/27/06 10:45	24.75	327.86	275.69	386.70		456.42	420.90		417.77	473.17	462.22	394.36
8/27/06 11:00	24.75	327.86	275.69	386.70		456.43	420.91		417.77	473.17	462.22	394.36
8/27/06 11:15	24.75	327.85	275.70	386.70		456.42	420.91		417.77	473.17	462.22	394.36
8/27/06 11:30	24.75	327.86	275.69	386.70		456.42	420.91		417.77	473.17	462.22	394.36
8/27/06 11:45	24.76	327.85	275.70	386.70		456.42	420.91		417.77	473.17	462.22	394.37

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
8/27/06 12:00	24.76	327.85	275.70	386.70		456.42	420.91		417.77	473.18	462.22	394.36
8/27/06 12:15	24.76	327.86	275.70	386.72		456.42	420.92		417.77	473.18	462.22	394.37
8/27/06 12:30	24.75	327.86	275.70	386.72		456.43	420.92		417.78	473.18	462.22	394.37
8/27/06 12:45	24.75	327.86	275.70	386.72		456.43	420.93		417.77	473.18	462.22	394.36
8/27/06 13:00	24.75	327.86	275.70	386.73		456.43	420.93		417.78	473.18	462.22	394.38
8/27/06 13:15	24.76	327.86	275.70	386.73		456.43	420.93		417.77	473.18	462.22	394.37
8/27/06 13:30	24.76	327.86	275.70	386.74		456.44	420.93		417.78	473.19	462.22	394.38
8/27/06 13:45	24.75	327.87	275.71	386.77		456.45	420.95		417.78	473.19	462.22	394.37
8/27/06 14:00	24.75	327.87	275.71	386.82		456.47	420.98		417.79	473.19	462.22	394.38
8/27/06 14:15	24.75	327.87	275.71	386.82		456.46	420.97		417.78	473.18	462.22	394.38
8/27/06 14:30	24.75	327.88	275.71	386.84		456.47	420.98		417.78	473.19	462.22	394.38
8/27/06 14:45	24.75	327.88	275.71	386.86		456.47	420.97		417.78	473.19	462.22	394.37
8/27/06 15:00	24.74	327.89	275.71	386.88		456.48	420.98		417.77	473.19	462.22	394.38
8/27/06 15:15	24.74	327.88	275.71	386.89		456.46	420.98		417.74	473.19	462.22	394.38
8/27/06 15:30	24.74	327.88	275.71	386.89		456.46	420.98		417.74	473.19	462.22	394.38
8/27/06 15:45	24.74	327.87	275.71	386.90		456.46	420.98		417.75	473.19	462.22	394.38
8/27/06 16:00	24.74	327.87	275.71	386.92		456.46	420.99		417.74	473.19	462.22	394.37
8/27/06 16:15	24.74	327.87	275.71	386.93		456.45	420.98		417.75	473.19	462.22	394.36
8/27/06 16:30	24.74	327.87	275.71	386.94		456.45	420.98		417.72	473.19	462.21	394.36
8/27/06 16:45	24.73	327.87	275.70	386.95		456.45	420.98		417.69	473.19	462.21	394.36
8/27/06 17:00	24.73	327.87	275.70	386.96		456.45	420.98		417.69	473.19	462.21	394.36
8/27/06 17:15	24.73	327.87	275.70	386.96		456.45	420.97		417.72	473.19	462.21	394.36
8/27/06 17:30	24.73	327.87	275.70	386.96		456.45	420.96		417.72	473.18	462.21	394.36
8/27/06 17:45	24.75	327.86	275.70	386.96		456.45	420.95		417.72	473.17	462.21	394.37
8/27/06 18:00	24.75	327.85	275.70	386.95		456.45	420.95		417.71	473.17	462.21	394.36
8/27/06 18:15	24.75	327.84	275.70	386.92		456.45	420.93		417.73	473.17	462.21	394.37
8/27/06 18:30	24.76	327.84	275.71	386.91		456.45	420.92		417.68	473.17	462.21	394.37
8/27/06 18:45	24.76	327.84	275.70	386.90		456.45	420.92		417.62	473.17	462.20	394.37
8/27/06 19:00	24.76	327.84	275.70	386.89		456.45	420.93		417.65	473.16	462.20	394.36
8/27/06 19:15	24.76	327.83	275.70	386.88		456.45	420.91		417.71	473.16	462.20	394.36
8/27/06 19:30	24.76	327.83	275.70	386.86		456.44	420.91		417.73	473.16	462.21	394.36
8/27/06 19:45	24.77	327.82	275.70	386.84		456.45	420.90		417.73	473.16	462.20	394.36
8/27/06 20:00	24.77	327.82	275.70	386.82		456.45	420.90		417.74	473.15	462.20	394.36
8/27/06 20:15	24.78	327.81	275.70	386.80		456.45	420.90		417.73	473.15	462.20	394.36
8/27/06 20:30	24.79	327.80	275.70	386.78		456.45	420.89		417.72	473.14	462.20	394.37
8/27/06 20:45	24.79	327.80	275.70	386.78		456.45	420.90		417.72	473.14	462.20	394.37
8/27/06 21:00	24.80	327.80	275.71	386.78		456.46	420.90		417.72	473.14	462.20	394.37
8/27/06 21:15	24.81	327.80	275.71	386.78		456.46	420.90		417.71	473.14	462.21	394.37
8/27/06 21:30	24.80	327.80	275.71	386.78		456.46	420.90		417.72	473.14	462.21	394.38
8/27/06 21:45	24.81	327.80	275.71	386.78		456.46	420.91		417.71	473.14	462.22	394.38
8/27/06 22:00	24.81	327.80	275.72	386.78		456.46	420.91		417.72	473.14	462.22	394.38
8/27/06 22:15	24.81	327.80	275.72	386.79		456.46	420.92		417.72	473.15	462.22	394.38
8/27/06 22:30	24.82	327.79	275.72	386.80		456.47	420.91		417.72	473.14	462.22	394.38
8/27/06 22:45	24.82	327.80	275.73	386.80		456.47	420.91		417.73	473.15	462.22	394.38
8/27/06 23:00	24.81	327.80	275.73	386.81		456.47	420.92		417.73	473.15	462.22	394.38
8/27/06 23:15	24.82	327.80	275.73	386.81		456.47	420.92		417.73	473.15	462.22	394.38
8/27/06 23:30	24.82	327.80	275.73	386.81		456.48	420.92		417.73	473.15	462.22	394.38
8/27/06 23:45	24.82	327.80	275.73	386.82		456.48	420.92		417.73	473.16	462.22	394.38
8/28/06 0:00	24.82	327.80	275.73	386.82		456.48	420.92		417.73	473.16	462.23	394.39
8/28/06 0:15	24.82	327.80	275.74	386.82		456.48	420.93		417.74	473.16	462.23	394.39
8/28/06 0:30	24.82	327.81	275.74	386.83		456.49	420.93		417.74	473.16	462.23	394.39
8/28/06 0:45	24.82	327.81	275.74	386.83		456.49	420.94		417.74	473.16	462.23	394.39
8/28/06 1:00	24.83	327.81	275.74	386.84		456.49	420.94		417.74	473.17	462.24	394.40
8/28/06 1:15	24.83	327.81	275.75	386.85		456.49	420.94		417.74	473.17	462.24	394.40
8/28/06 1:30	24.82	327.81	275.75	386.85		456.49	420.95		417.74	473.17	462.24	394.40
8/28/06 1:45	24.83	327.81	275.75	386.86		456.50	420.95		417.74	473.17	462.24	394.40
8/28/06 2:00	24.83	327.82	275.75	386.86		456.50	420.95		417.74	473.17	462.24	394.41
8/28/06 2:15	24.83	327.82	275.75	386.87		456.50	420.95		417.75	473.18	462.25	394.41
8/28/06 2:30	24.83	327.82	275.75	386.88		456.50	420.95		417.74	473.18	462.25	394.41
8/28/06 2:45	24.83	327.82	275.75	386.89		456.50	420.96		417.74	473.18	462.24	394.41
8/28/06 3:00	24.83	327.82	275.76	386.89		456.50	420.96		417.75	473.18	462.25	394.41
8/28/06 3:15	24.83	327.82	275.76	386.90		456.50	420.96		417.75	473.18	462.25	394.41
8/28/06 3:30	24.83	327.82	275.75	386.90		456.50	420.96		417.75	473.18	462.25	394.41
8/28/06 3:45	24.83	327.82	275.75	386.90		456.50	420.96		417.75	473.18	462.24	394.41
8/28/06 4:00	24.82	327.82	275.75	386.90		456.50	420.96		417.74	473.18	462.24	394.40
8/28/06 4:15	24.82	327.81	275.75	386.90		456.50	420.96		417.74	473.18	462.23	394.40
8/28/06 4:30	24.82	327.81	275.75	386.89		456.50	420.96		417.73	473.18	462.23	394.41
8/28/06 4:45	24.82	327.81	275.75	386.89		456.49	420.96		417.73	473.18	462.23	394.40
8/28/06 5:00	24.82	327.81	275.75	386.89		456.49	420.95		417.73	473.18	462.24	394.40
8/28/06 5:15	24.83	327.81	275.74	386.89		456.49	420.95		417.73	473.18	462.23	394.39
8/28/06 5:30	24.83	327.80	275.74	386.89		456.49	420.95		417.73	473.18	462.22	394.40
8/28/06 5:45	24.83	327.80	275.74	386.89		456.49	420.94		417.73	473.17	462.22	394.39
8/28/06 6:00	24.83	327.80	275.74	386.89		456.49	420.94		417.73	473.17	462.23	394.39
8/28/06 6:15	24.83	327.80	275.74	386.88		456.48	420.94		417.73	473.17	462.22	394.39
8/28/06 6:30	24.83	327.79	275.74	386.88		456.48	420.94		417.72	473.17	462.22	394.39
8/28/06 6:45	24.83	327.79	275.74	386.88		456.48	420.94		417.72	473.16	462.22	394.39
8/28/06 7:00	24.83	327.79	275.74	386.89		456.48	420.93		417.72	473.16	462.22	394.38
8/28/06 7:15	24.84	327.79	275.74	386.91		456.48	420.94		417.72	473.15	462.22	394.39
8/28/06 7:30	24.83	327.79	275.74	386.94		456.48	420.96		417.74	473.15	462.22	394.39
8/28/06 7:45	24.83	327.79	275.75	386.97		456.48	420.97		417.76	473.15	462.22	394.39
8/28/06 8:00	24.83	327.79	275.74	387.00		456.48	420.97		417.77	473.14	462.22	394.39
8/28/06 8:15	24.83	327.79	275.74	386.99		456.48	420.98		417.78	473.14	462.22	394.39
8/28/06 8:30	24.83	327.79	275.74	386.97		456.48	420.99		417.78	473.14	462.23	394.39
8/28/06 8:45	24.82	327.79	275.74	386.97		456.48	421.00		417.79	473.14	462.22	394.39
8/28/06 9:00	24.82	327.79	275.74	386.95		456.49	421.00		417.78	473.14	462.22	394.39
8/28/06 9:15	24.82	327.79	275.75	386.94		456.49	421.01		417.78	473.14	462.23	394.39
8/28/06 9:30	24.82	327.80	275.75	386.95		456.49	421.01		417.83	473.13	462.23	394.39
8/28/06 9:45	24.82	327.79	275.74	386.94		456.49	421.01		417.98	473.13	462.24	394.39
8/28/06 10:00	24.82	327.79	275.75	386.95		456.49	421.01		419.00	473.13	462.24	394.39
8/28/06 10:15	24.82	327.80	275.75	386.95		456.49	421.00		419.06	473.13	462.23	394.39
8/28/06 10:30	24.82	327.80	275.75	386.95		456.49	421.00		419.09	473.14	462.24	394.39
8/28/06 10:45	24.82	327.80	275.76	386.95		456.49	421.00		419.12	473.13	462.23	394.39
8/28/06 11:00	24.82	327.80	275.75	386.95		456.50	421.00		419.15	473.14	462.23	394.39
8/28/06 11:15	24.81	327.81	275.76	386.95		456.50	421.00		419.15	473.14	462.23	394.39
8/28/06 11:30	24.82	327.81	275.75	386.96		456.50	421.00		419.16	473.14	462.25	394.40
8/28/06 11:45	24.81	327.82	275.76	386.96		456.50	421.00		419.16	473.14	462.24	394.39
8/28/06 12:00	24.80	327.82	275.76	386.95		456.50	420.99		419.11	473.15	462.25	394.41
8/28/06 12:15	24.80	327.82	275.76	386.95		456.50	421.01		419.19	473.15	462.24	394.40
8/28/06 12:30	24.80	327.83	275.76	386.96		456.50	421.01		419.21	473.15	462.24	394.40
8/28/06 12:45	24.79	327.83	275.77	386.96		456.50	421.01		419.24	473.16	462.25	394.40

Power Resources, Inc.
Regional Southwest Area Aquifer Tests
Appendix D-1 - 15-minute Depth to Water Data (All Monitoring Wells)

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
8/28/06 13:00	24.79	327.83	275.76	386.96		456.51	421.02		419.26	473.16	462.24	394.40
8/28/06 13:15	24.79	327.83	275.75	386.96		456.50	421.00		419.25	473.16	462.24	394.40
8/28/06 13:30	24.79	327.84	275.77	386.96		456.50	420.99		419.27	473.16	462.25	394.41
8/28/06 13:45	24.78	327.84	275.77	386.96		456.51	421.03		419.15	473.17	462.25	394.40
8/28/06 14:00	24.78	327.83	275.76	386.95		456.50	421.03		419.26	473.17	462.25	394.41
8/28/06 14:15	24.78	327.84	275.77	386.94		456.51	421.02		419.27	473.17	462.25	394.41
8/28/06 14:30	24.78	327.85	275.77	386.95		456.51	420.98		419.18	473.17	462.25	394.41
8/28/06 14:45	24.77	327.84	275.77	386.95		456.51	421.03		419.24	473.18	462.24	394.41
8/28/06 15:00	24.77	327.85	275.76	386.95		456.50	421.00		419.22	473.18	462.24	394.40
8/28/06 15:15	24.77	327.86	275.75	386.95		456.50	421.02		419.25	473.18	462.25	394.39
8/28/06 15:30	24.76	327.85	275.77	386.93		456.50	421.02		419.24	473.18	462.23	394.40
8/28/06 15:45	24.76	327.86	275.75	386.94		456.50	421.01		419.08	473.19	462.23	394.39
8/28/06 16:00	24.76	327.85	275.76	386.94		456.50	421.02		419.06	473.19	462.24	394.40
8/28/06 16:15	24.76	327.85	275.76	386.95		456.50	421.02		419.06	473.19	462.23	394.40
8/28/06 16:30	24.76	327.85	275.75	386.93		456.49	421.00		419.05	473.19	462.23	394.39
8/28/06 16:45	24.76	327.85	275.75	386.93		456.49	421.00		419.06	473.19	462.22	394.39
8/28/06 17:00	24.76	327.85	275.75	386.93		456.49	421.00		419.06	473.19	462.22	394.38
8/28/06 17:15	24.76	327.85	275.75	386.93		456.49	420.99		419.06	473.19	462.22	394.38
8/28/06 17:30	24.75	327.85	275.75	386.92		456.49	420.98		419.06	473.19	462.21	394.38
8/28/06 17:45	24.75	327.85	275.74	386.92		456.48	420.97		419.06	473.19	462.22	394.38
8/28/06 18:00	24.75	327.84	275.74	386.92		456.48	420.96		419.06	473.19	462.22	394.38
8/28/06 18:15	24.75	327.84	275.74	386.91		456.48	420.95		419.06	473.19	462.22	394.38
8/28/06 18:30	24.76	327.84	275.74	386.91		456.48	420.95		419.06	473.19	462.21	394.38
8/28/06 18:45	24.76	327.83	275.74	386.91		456.48	420.94		419.06	473.19	462.20	394.38
8/28/06 19:00	24.76	327.83	275.74	386.91		456.47	420.94		419.05	473.19	462.20	394.38
8/28/06 19:15	24.76	327.82	275.74	386.90		456.47	420.93		419.03	473.19	462.20	394.38
8/28/06 19:30	24.76	327.81	275.73	386.90		456.47	420.93		419.05	473.19	462.20	394.37
8/28/06 19:45	24.78	327.80	275.73	386.90		456.47	420.92		419.05	473.18	462.20	394.37
8/28/06 20:00	24.78	327.79	275.73	386.90		456.47	420.92		419.05	473.18	462.20	394.37
8/28/06 20:15	24.79	327.79	275.73	386.90		456.47	420.92		419.04	473.18	462.20	394.38
8/28/06 20:30	24.80	327.78	275.73	386.90		456.47	420.92		419.04	473.18	462.20	394.38
8/28/06 20:45	24.81	327.78	275.74	386.90		456.47	420.92		419.04	473.17	462.20	394.38
8/28/06 21:00	24.81	327.78	275.74	386.90		456.48	420.92		419.04	473.17	462.20	394.38
8/28/06 21:15	24.82	327.78	275.74	386.91		456.47	420.93		419.03	473.17	462.20	394.38
8/28/06 21:30	24.82	327.78	275.74	386.91		456.48	420.93		419.03	473.17	462.20	394.37
8/28/06 21:45	24.83	327.78	275.74	386.91		456.48	420.94		419.03	473.17	462.20	394.38
8/28/06 22:00	24.83	327.78	275.74	386.91		456.48	420.94		419.03	473.17	462.20	394.38
8/28/06 22:15	24.83	327.78	275.74	386.91		456.48	420.94		419.04	473.18	462.20	394.38
8/28/06 22:30	24.83	327.78	275.74	386.91		456.48	420.94		419.03	473.18	462.20	394.38
8/28/06 22:45	24.83	327.78	275.75	386.91		456.48	420.94		419.04	473.18	462.20	394.38
8/28/06 23:00	24.82	327.79	275.75	386.92		456.48	420.94		419.04	473.19	462.20	394.38
8/28/06 23:15	24.82	327.79	275.75	386.92		456.48	420.94		419.04	473.19	462.20	394.38
8/28/06 23:30	24.82	327.79	275.75	386.91		456.48	420.94		419.04	473.19	462.20	394.38
8/28/06 23:45	24.82	327.80	275.75	386.91		456.48	420.95		419.04	473.20	462.20	394.38
8/29/06 0:00	24.82	327.80	275.75	386.91		456.48	420.94		419.04	473.20	462.21	394.38
8/29/06 0:15	24.81	327.80	275.75	386.92		456.48	420.95		419.04	473.21	462.20	394.38
8/29/06 0:30	24.81	327.80	275.75	386.92		456.48	420.95		419.04	473.21	462.21	394.38
8/29/06 0:45	24.81	327.80	275.75	386.92		456.49	420.95		419.04	473.21	462.21	394.38
8/29/06 1:00	24.81	327.81	275.75	386.92		456.48	420.96		419.04	473.22	462.21	394.38
8/29/06 1:15	24.81	327.81	275.75	386.92		456.48	420.96		419.04	473.22	462.21	394.38
8/29/06 1:30	24.80	327.81	275.75	386.92		456.48	420.96		419.04	473.23	462.21	394.38
8/29/06 1:45	24.80	327.81	275.75	386.92		456.49	420.96		419.04	473.23	462.21	394.38
8/29/06 2:00	24.79	327.82	275.76	386.92		456.49	420.96		419.04	473.24	462.21	394.38
8/29/06 2:15	24.79	327.83	275.75	386.91		456.48	420.97		419.04	473.24	462.20	394.38
8/29/06 2:30	24.78	327.83	275.75	386.91		456.48	420.97		419.04	473.25	462.20	394.38
8/29/06 2:45	24.78	327.83	275.75	386.91		456.48	420.97		419.04	473.25	462.20	394.38
8/29/06 3:00	24.78	327.83	275.75	386.91		456.48	420.97		419.04	473.25	462.21	394.38
8/29/06 3:15	24.78	327.83	275.75	386.92		456.48	420.97		419.04	473.25	462.20	394.38
8/29/06 3:30	24.77	327.83	275.75	386.91		456.48	420.98		419.04	473.26	462.20	394.37
8/29/06 3:45	24.77	327.83	275.75	386.91		456.48	420.97		419.04	473.26	462.20	394.37
8/29/06 4:00	24.77	327.84	275.75	386.91		456.48	420.98		419.04	473.26	462.20	394.38
8/29/06 4:15	24.77	327.84	275.75	386.91		456.48	420.98		419.04	473.27	462.20	394.37
8/29/06 4:30	24.76	327.83	275.74	386.90		456.47	420.98		419.04	473.27	462.20	394.36
8/29/06 4:45	24.76	327.83	275.74	386.90		456.47	420.98		419.04	473.27	462.19	394.36
8/29/06 5:00	24.76	327.83	275.74	386.90		456.47	420.98		419.03	473.27	462.19	394.37
8/29/06 5:15	24.75	327.83	275.74	386.90		456.46	420.98		419.03	473.27	462.19	394.36
8/29/06 5:30	24.75	327.83	275.73	386.89		456.46	420.98		419.03	473.27	462.19	394.36
8/29/06 5:45	24.75	327.83	275.73	386.89		456.46	420.98		419.03	473.27	462.18	394.36
8/29/06 6:00	24.74	327.82	275.73	386.89		456.46	420.98		419.03	473.27	462.17	394.36
8/29/06 6:15	24.74	327.82	275.73	386.89		456.45	420.97		419.02	473.27	462.17	394.36
8/29/06 6:30	24.74	327.82	275.73	386.88		456.45	420.97		419.02	473.27	462.17	394.35
8/29/06 6:45	24.75	327.82	275.73	386.88		456.45	420.97		419.02	473.26	462.17	394.35
8/29/06 7:00	24.74	327.82	275.73	386.88		456.45	420.97		419.02	473.26	462.17	394.35
8/29/06 7:15	24.74	327.83	275.72	386.88		456.45	420.98		419.01	473.26	462.17	394.34
8/29/06 7:30	24.74	327.83	275.72	386.88		456.45	420.97		419.01	473.26	462.17	394.34
8/29/06 7:45	24.74	327.82	275.72	386.88		456.45	420.97		419.01	473.26	462.17	394.34
8/29/06 8:00	24.73	327.82	275.72	386.89		456.44	420.97		419.01	473.26	462.17	394.34
8/29/06 8:15	24.72	327.83	275.72	386.88		456.44	420.96		419.00	473.26	462.16	394.33
8/29/06 8:30	24.72	327.83	275.71	386.88		456.44	420.97		419.00	473.26	462.16	394.33
8/29/06 8:45	24.71	327.83	275.71	386.88		456.44	420.96		418.99	473.26	462.17	394.33
8/29/06 9:00	24.70	327.83	275.72	386.88		456.44	420.97		418.99	473.26	462.16	394.33
8/29/06 9:15	24.70	327.83	275.71	386.88		456.44	420.96		418.99	473.26	462.16	394.33
8/29/06 9:30	24.69	327.84	275.71	386.87		456.43	420.96		418.98	473.26	462.16	394.33
8/29/06 9:45	24.68	327.84	275.71	386.88		456.43	420.97		418.98	473.26	462.16	394.33
8/29/06 10:00	24.67	327.85	275.71	386.87		456.43	420.97		418.98	473.26	462.15	394.32
8/29/06 10:15	24.67	327.85	275.71	386.87		456.43	420.95		418.98	473.26	462.15	394.33
8/29/06 10:30	24.66	327.86	275.71	386.87		456.43	420.94		418.98	473.26	462.15	394.33
8/29/06 10:45	24.66	327.86	275.71	386.87		456.43	420.90		418.98	473.26	462.15	394.32
8/29/06 11:00	24.65	327.87	275.70	386.87		456.43	420.91		418.98	473.26	462.14	394.32
8/29/06 11:15	24.65	327.87	275.70	386.87		456.43	420.90		418.97	473.26	462.15	394.31
8/29/06 11:30	24.64	327.87	275.70	386.87		456.43	420.90		418.97	473.27	462.14	394.32
8/29/06 11:45	24.62	327.83	275.70	386.87		456.42	420.91		418.98	473.27	462.15	394.32
8/29/06 12:00	24.62	327.83	275.70	386.86		456.42	420.90		418.99	473.28	462.14	394.32
8/29/06 12:15	24.61	327.83	275.69	386.86		456.42	420.90		418.99	473.28	462.14	394.31
8/29/06 12:30	24.61	327.83	275.69	386.86		456.42	420.90		418.99	473.28	462.14	394.31
8/29/06 12:45	24.60	327.83	275.70	386.86		456.42	420.90		418.99	473.28	462.14	394.31
8/29/06 13:00	24.60	327.83	275.68	386.86		456.42	420.90		418.99	473.29	462.14	394.31
8/29/06 13:15	24.59	327.83	275.69	386.85		456.42	420.90		418.99	473.29	462.13	394.31
8/29/06 13:30	24.59	327.83	275.69	386.86		456.41	420.90		419.00	473.29	462.12	394.31
8/29/06 13:45	24.59	327.82	275.69	386.84		456.41	420.89		419.01	473.30	462.13	394.31

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
8/29/06 14:00	24.58	327.82	275.68	386.84		456.41	420.89		419.01	473.30	462.13	394.30
8/29/06 14:15	24.58	327.82	275.69	386.84		456.41	420.89		419.02	473.30	462.13	394.30
8/29/06 14:30	24.56	327.82	275.68	386.84		456.41	420.89		419.02	473.31	462.12	394.30
8/29/06 14:45	24.56	327.82	275.68	386.84		456.41	420.89		419.02	473.31	462.12	394.29
8/29/06 15:00	24.56	327.81	275.67	386.84		456.41	420.89		419.02	473.32	462.12	394.30
8/29/06 15:15	24.55	327.81	275.67	386.82		456.40	420.88		419.03	473.32	462.12	394.29
8/29/06 15:30	24.54	327.80	275.68	386.82		456.40	420.88		419.02	473.32	462.12	394.28
8/29/06 15:45	24.54	327.80	275.68	386.82		456.40	420.88		419.01	473.32	462.12	394.28
8/29/06 16:00	24.53	327.80	275.66	386.82		456.39	420.88		419.01	473.33	462.11	394.28
8/29/06 16:15	24.53	327.80	275.66	386.81		456.39	420.88		419.01	473.33	462.11	394.28
8/29/06 16:30	24.52	327.80	275.66	386.81		456.39	420.88		419.00	473.33	462.11	394.28
8/29/06 16:45	24.53	327.80	275.66	386.81		456.39	420.87		419.00	473.33	462.10	394.28
8/29/06 17:00	24.52	327.79	275.66	386.81		456.39	420.87		419.00	473.33	462.09	394.28
8/29/06 17:15	24.53	327.79	275.66	386.80		456.39	420.87		419.01	473.33	462.09	394.28
8/29/06 17:30	24.52	327.79	275.66	386.80		456.38	420.87		419.00	473.33	462.09	394.28
8/29/06 17:45	24.51	327.78	275.65	386.80		456.38	420.87		419.00	473.34	462.09	394.27
8/29/06 18:00	24.51	327.78	275.65	386.79		456.38	420.86		418.99	473.34	462.09	394.27
8/29/06 18:15	24.51	327.78	275.65	386.79		456.37	420.86		418.99	473.34	462.09	394.26
8/29/06 18:30	24.51	327.78	275.65	386.78		456.37	420.86		418.99	473.34	462.09	394.26
8/29/06 18:45	24.51	327.77	275.64	386.78		456.37	420.86		418.99	473.34	462.08	394.26
8/29/06 19:00	24.51	327.77	275.64	386.78		456.37	420.85		418.99	473.34	462.08	394.26
8/29/06 19:15	24.51	327.77	275.64	386.77		456.36	420.85		418.98	473.34	462.08	394.25
8/29/06 19:30	24.52	327.77	275.64	386.77		456.36	420.85		418.98	473.34	462.07	394.25
8/29/06 19:45	24.52	327.77	275.64	386.77		456.36	420.85		418.98	473.33	462.07	394.24
8/29/06 20:00	24.53	327.77	275.64	386.77		456.36	420.85		418.98	473.33	462.07	394.25
8/29/06 20:15	24.54	327.77	275.64	386.77		456.36	420.85		418.98	473.33	462.08	394.25
8/29/06 20:30	24.54	327.77	275.64	386.77		456.36	420.85		418.98	473.33	462.07	394.25
8/29/06 20:45	24.55	327.77	275.64	386.77		456.36	420.85		418.98	473.33	462.07	394.25
8/29/06 21:00	24.55	327.77	275.64	386.78		456.36	420.85		418.98	473.33	462.07	394.25
8/29/06 21:15	24.56	327.77	275.64	386.77		456.36	420.85		418.98	473.32	462.07	394.25
8/29/06 21:30	24.56	327.77	275.64	386.77		456.36	420.85		418.98	473.33	462.07	394.25
8/29/06 21:45	24.56	327.77	275.64	386.78		456.36	420.85		418.98	473.32	462.08	394.25
8/29/06 22:00	24.56	327.77	275.64	386.78		456.36	420.85		418.98	473.33	462.07	394.25
8/29/06 22:15	24.56	327.77	275.64	386.78		456.36	420.85		418.98	473.33	462.07	394.25
8/29/06 22:30	24.56	327.77	275.64	386.78		456.36	420.85		418.98	473.33	462.07	394.25
8/29/06 22:45	24.56	327.77	275.64	386.78		456.36	420.85		418.99	473.33	462.07	394.25
8/29/06 23:00	24.56	327.77	275.64	386.78		456.36	420.85		418.98	473.33	462.07	394.25
8/29/06 23:15	24.56	327.77	275.65	386.78		456.36	420.85		418.99	473.33	462.07	394.25
8/29/06 23:30	24.57	327.77	275.64	386.78		456.36	420.85		418.99	473.34	462.07	394.25
8/29/06 23:45	24.56	327.77	275.64	386.78		456.36	420.85		418.99	473.34	462.07	394.25
8/30/06 0:00	24.56	327.77	275.65	386.78		456.36	420.85		418.99	473.34	462.07	394.26
8/30/06 0:15	24.56	327.77	275.64	386.78		456.37	420.85		418.99	473.34	462.08	394.25
8/30/06 0:30	24.56	327.77	275.65	386.78		456.37	420.85		418.99	473.35	462.08	394.25
8/30/06 0:45	24.56	327.77	275.65	386.78		456.37	420.86		418.99	473.35	462.08	394.25
8/30/06 1:00	24.56	327.78	275.65	386.79		456.37	420.86		418.99	473.35	462.08	394.26
8/30/06 1:15	24.56	327.78	275.65	386.79		456.37	420.86		418.99	473.35	462.08	394.25
8/30/06 1:30	24.56	327.78	275.65	386.79		456.37	420.86		419.00	473.35	462.08	394.27
8/30/06 1:45	24.55	327.78	275.65	386.79		456.37	420.86		419.00	473.36	462.08	394.27
8/30/06 2:00	24.55	327.77	275.65	386.79		456.37	420.86		418.99	473.36	462.08	394.27
8/30/06 2:15	24.55	327.78	275.66	386.79		456.37	420.86		419.00	473.36	462.08	394.25
8/30/06 2:30	24.56	327.78	275.66	386.79		456.38	420.86		419.00	473.36	462.08	394.27
8/30/06 2:45	24.55	327.78	275.66	386.79		456.37	420.87		419.00	473.37	462.09	394.26
8/30/06 3:00	24.55	327.78	275.66	386.79		456.37	420.86		419.00	473.37	462.08	394.27
8/30/06 3:15	24.55	327.78	275.66	386.80		456.38	420.87		419.00	473.37	462.09	394.27
8/30/06 3:30	24.55	327.78	275.66	386.79		456.38	420.87		419.00	473.37	462.09	394.26
8/30/06 3:45	24.54	327.78	275.66	386.80		456.37	420.87		419.00	473.37	462.09	394.26
8/30/06 4:00	24.55	327.78	275.66	386.80		456.38	420.87		419.00	473.37	462.09	394.27
8/30/06 4:15	24.54	327.78	275.66	386.80		456.38	420.87		419.00	473.37	462.09	394.27
8/30/06 4:30	24.54	327.78	275.66	386.80		456.38	420.87		419.00	473.37	462.09	394.27
8/30/06 4:45	24.54	327.78	275.66	386.80		456.38	420.87		419.00	473.37	462.09	394.26
8/30/06 5:00	24.54	327.78	275.66	386.80		456.38	420.87		419.00	473.37	462.09	394.26
8/30/06 5:15	24.54	327.78	275.65	386.80		456.37	420.87		419.00	473.37	462.09	394.26
8/30/06 5:30	24.54	327.78	275.66	386.80		456.37	420.87		419.00	473.37	462.09	394.26
8/30/06 5:45	24.54	327.78	275.66	386.79		456.38	420.87		419.00	473.37	462.09	394.26
8/30/06 6:00	24.54	327.78	275.66	386.79		456.38	420.86		419.00	473.36	462.09	394.26
8/30/06 6:15	24.54	327.78	275.66	386.79		456.38	420.87		419.00	473.36	462.09	394.27
8/30/06 6:30	24.54	327.78	275.66	386.79		456.38	420.87		419.00	473.36	462.08	394.27
8/30/06 6:45	24.54	327.78	275.66	386.79		456.38	420.87		419.00	473.36	462.09	394.26
8/30/06 7:00	24.54	327.78	275.66	386.79		456.37	420.86		419.01	473.35	462.09	394.26
8/30/06 7:15	24.54	327.77	275.66	386.79		456.37	420.86		419.00	473.35	462.08	394.26
8/30/06 7:30	24.53	327.78	275.66	386.79		456.37	420.86		419.00	473.35	462.08	394.26
8/30/06 7:45	24.53	327.77	275.66	386.80		456.37	420.86		419.00	473.35	462.08	394.26
8/30/06 8:00	24.53	327.77	275.66	386.79		456.37	420.86		419.00	473.34	462.09	394.25
8/30/06 8:15	24.53	327.77	275.65	386.79		456.37	420.86		419.00	473.34	462.08	394.25
8/30/06 8:30	24.52	327.77	275.65	386.79		456.37	420.86		419.00	473.34	462.08	394.25
8/30/06 8:45	24.52	327.77	275.65	386.78		456.37	420.86		419.00	473.34	462.08	394.25
8/30/06 9:00	24.52	327.77	275.65	386.79		456.37	420.86		419.00	473.34	462.08	394.25
8/30/06 9:15	24.51	327.76	275.65	386.79		456.36	420.85		418.99	473.34	462.08	394.24
8/30/06 9:30	24.52	327.76	275.65	386.78		456.36	420.86		418.99	473.34	462.08	394.25
8/30/06 9:45	24.51	327.77	275.65	386.79		456.36	420.85		418.99	473.33	462.07	394.25
8/30/06 10:00	24.51	327.76	275.64	386.78		456.37	420.85		418.99	473.33	462.07	394.25
8/30/06 10:15	24.50	327.76	275.65	386.79		456.36	420.85		418.99	473.33	462.08	394.25
8/30/06 10:30	24.50	327.76	275.65	386.79		456.36	420.85		418.99	473.33	462.07	394.25
8/30/06 10:45	24.50	327.76	275.65	386.78		456.36	420.85		418.99	473.33	462.08	394.25
8/30/06 11:00	24.49	327.76	275.64	386.78		456.36	420.85		418.99	473.33	462.07	394.24
8/30/06 11:15	24.48	327.76	275.65	386.78		456.36	420.85		418.99	473.33	462.07	394.24
8/30/06 11:30	24.48	327.76	275.63	386.77		456.36	420.85		418.99	473.33	462.07	394.24
8/30/06 11:45	24.48	327.75	275.64	386.79		456.36	420.85		418.99	473.33	462.07	394.24
8/30/06 12:00	24.48	327.76	275.64	386.78		456.36	420.85		419.00	473.33	462.07	394.24
8/30/06 12:15	24.47	327.76	275.64	386.78		456.36	420.85		418.97	473.33	462.07	394.24
8/30/06 12:30	24.47	327.76	275.64	386.76		456.36	420.85		418.98	473.33	462.07	394.24
8/30/06 12:45	24.46	327.76	275.64	386.78		456.36	420.85		418.99	473.33	462.06	394.24
8/30/06 13:00	24.45	327.75	275.64	386.78		456.35	420.84		418.99	473.34	462.06	394.24
8/30/06 13:15	24.44	327.75	275.63	386.77		456.35	420.84		418.98	473.34	462.06	394.24
8/30/06 13:30	24.44	327.75	275.65	386.76		456.35	420.84		418.99	473.34	462.06	394.24
8/30/06 13:45	24.43	327.75	275.62	386.76		456.35	420.84		418.97	473.34	462.06	394.23
8/30/06 14:00	24.43	327.74	275.64	386.77		456.35	420.84		418.96	473.34	462.06	394.24
8/30/06 14:15	24.43	327.74	275.63	386.76		456.35	420.84		418.97	473.34	462.05	394.23
8/30/06 14:30	24.42	327.74	275.63	386.75		456.35	420.83		418.98	473.34	462.05	394.22
8/30/06 14:45	24.42	327.74	275.62	386.76		456.34	420.84		418.98	473.35	462.05	394.23

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
8/30/06 15:00	24.42	327.74	275.62	386.76		456.34	420.83		418.98	473.35	462.04	394.22
8/30/06 15:15	24.41	327.74	275.62	386.76		456.34	420.83		418.98	473.36	462.04	394.22
8/30/06 15:30	24.40	327.74	275.62	386.75		456.33	420.83		418.97	473.36	462.04	394.21
8/30/06 15:45	24.40	327.74	275.61	386.75		456.33	420.83		418.97	473.36	462.04	394.22
8/30/06 16:00	24.39	327.74	275.61	386.73		456.33	420.83		418.96	473.36	462.04	394.21
8/30/06 16:15	24.39	327.73	275.62	386.75		456.33	420.83		418.97	473.36	462.03	394.21
8/30/06 16:30	24.39	327.73	275.62	386.74		456.33	420.82		418.96	473.36	462.03	394.21
8/30/06 16:45	24.38	327.73	275.60	386.74		456.33	420.82		418.96	473.37	462.03	394.21
8/30/06 17:00	24.38	327.73	275.61	386.73		456.33	420.82		418.96	473.36	462.03	394.20
8/30/06 17:15	24.38	327.72	275.60	386.73		456.32	420.82		418.96	473.37	462.02	394.20
8/30/06 17:30	24.38	327.72	275.60	386.72		456.32	420.82		418.96	473.37	462.02	394.20
8/30/06 17:45	24.38	327.71	275.60	386.73		456.32	420.82		418.96	473.37	462.02	394.19
8/30/06 18:00	24.38	327.71	275.60	386.72		456.32	420.81		418.95	473.36	462.02	394.20
8/30/06 18:15	24.38	327.72	275.60	386.72		456.32	420.82		418.95	473.36	462.02	394.19
8/30/06 18:30	24.39	327.71	275.60	386.72		456.31	420.81		418.95	473.36	462.01	394.19
8/30/06 18:45	24.39	327.71	275.60	386.72		456.31	420.81		418.95	473.36	462.02	394.20
8/30/06 19:00	24.38	327.71	275.59	386.72		456.31	420.81		418.95	473.36	462.01	394.20
8/30/06 19:15	24.39	327.71	275.60	386.71		456.31	420.81		418.95	473.36	462.01	394.19
8/30/06 19:30	24.40	327.71	275.60	386.71		456.31	420.81		418.95	473.36	462.01	394.19
8/30/06 19:45	24.41	327.71	275.60	386.71		456.31	420.81		418.94	473.36	462.01	394.19
8/30/06 20:00	24.42	327.71	275.60	386.71		456.31	420.81		418.95	473.35	462.01	394.19
8/30/06 20:15	24.43	327.71	275.60	386.72		456.32	420.81		418.95	473.34	462.01	394.20
8/30/06 20:30	24.45	327.71	275.60	386.72		456.32	420.81		418.95	473.34	462.01	394.20
8/30/06 20:45	24.46	327.72	275.61	386.72		456.32	420.81		418.95	473.34	462.02	394.20
8/30/06 21:00	24.46	327.72	275.62	386.73		456.33	420.82		418.96	473.33	462.03	394.21
8/30/06 21:15	24.47	327.72	275.61	386.73		456.33	420.82		418.96	473.33	462.02	394.21
8/30/06 21:30	24.47	327.72	275.61	386.73		456.33	420.82		418.96	473.33	462.02	394.20
8/30/06 21:45	24.48	327.72	275.62	386.74		456.33	420.82		418.96	473.32	462.02	394.20
8/30/06 22:00	24.48	327.72	275.62	386.74		456.33	420.82		418.96	473.32	462.03	394.21
8/30/06 22:15	24.48	327.72	275.62	386.74		456.33	420.82		418.96	473.32	462.02	394.21
8/30/06 22:30	24.48	327.73	275.62	386.74		456.33	420.83		418.96	473.32	462.02	394.21
8/30/06 22:45	24.48	327.72	275.62	386.74		456.33	420.83		418.96	473.32	462.03	394.22
8/30/06 23:00	24.48	327.73	275.62	386.74		456.33	420.83		418.97	473.32	462.03	394.22
8/30/06 23:15	24.49	327.73	275.62	386.74		456.33	420.83		418.97	473.32	462.03	394.22
8/30/06 23:30	24.49	327.73	275.62	386.74		456.34	420.83		418.97	473.32	462.03	394.22
8/30/06 23:45	24.49	327.73	275.62	386.74		456.34	420.83		418.97	473.32	462.03	394.22
8/31/06 0:00	24.49	327.74	275.63	386.74		456.34	420.83		418.97	473.32	462.03	394.22
8/31/06 0:15	24.50	327.74	275.62	386.75		456.34	420.84		418.97	473.32	462.03	394.23
8/31/06 0:30	24.49	327.74	275.63	386.76		456.34	420.84		418.98	473.32	462.04	394.23
8/31/06 0:45	24.50	327.74	275.64	386.76		456.35	420.84		418.98	473.31	462.04	394.23
8/31/06 1:00	24.50	327.74	275.63	386.76		456.35	420.85		418.98	473.32	462.04	394.24
8/31/06 1:15	24.50	327.75	275.64	386.76		456.35	420.85		418.98	473.32	462.04	394.24
8/31/06 1:30	24.50	327.75	275.64	386.76		456.35	420.85		418.98	473.32	462.04	394.24
8/31/06 1:45	24.50	327.75	275.64	386.76		456.36	420.85		418.98	473.32	462.05	394.24
8/31/06 2:00	24.51	327.75	275.64	386.76		456.36	420.86		418.99	473.32	462.05	394.24
8/31/06 2:15	24.51	327.75	275.65	386.76		456.36	420.86		418.99	473.32	462.06	394.24
8/31/06 2:30	24.52	327.76	275.65	386.76		456.36	420.86		418.99	473.32	462.06	394.24
8/31/06 2:45	24.52	327.76	275.65	386.77		456.37	420.86		419.00	473.32	462.07	394.24
8/31/06 3:00	24.54	327.77	275.64	386.77		456.37	420.86		418.99	473.31	462.07	394.25
8/31/06 3:15	24.57	327.78	275.66	386.78		456.38	420.87		419.01	473.29	462.08	394.26
8/31/06 3:30	24.58	327.78	275.68	386.78		456.39	420.88		419.01	473.29	462.09	394.27
8/31/06 3:45	24.58	327.79	275.68	386.78		456.40	420.89		419.01	473.29	462.09	394.27
8/31/06 4:00	24.59	327.79	275.68	386.79		456.40	420.89		419.03	473.28	462.09	394.28
8/31/06 4:15	24.59	327.80	275.69	386.79		456.41	420.89		419.02	473.28	462.09	394.28
8/31/06 4:30	24.62	327.80	275.69	386.79		456.41	420.91		419.03	473.28	462.09	394.28
8/31/06 4:45	24.63	327.81	275.71	386.80		456.42	420.90		419.04	473.26	462.10	394.28
8/31/06 5:00	24.64	327.81	275.71	386.81		456.42	420.90		419.04	473.26	462.11	394.28
8/31/06 5:15	24.64	327.81	275.71	386.81		456.42	420.90		419.05	473.26	462.11	394.30
8/31/06 5:30	24.66	327.83	275.72	386.82		456.43	420.92		419.05	473.25	462.12	394.31
8/31/06 5:45	24.67	327.83	275.73	386.83		456.44	420.93		419.06	473.24	462.12	394.31
8/31/06 6:00	24.68	327.83	275.73	386.84		456.45	420.93		419.06	473.23	462.13	394.31
8/31/06 6:15	24.69	327.84	275.73	386.84		456.44	420.92		419.07	473.23	462.13	394.32
8/31/06 6:30	24.70	327.84	275.74	386.84		456.45	420.94		419.07	473.22	462.14	394.33
8/31/06 6:45	24.71	327.84	275.74	386.84		456.45	420.94		419.07	473.22	462.14	394.33
8/31/06 7:00	24.72	327.85	275.75	386.86		456.46	420.94		419.08	473.21	462.14	394.33
8/31/06 7:15	24.72	327.85	275.75	386.86		456.46	420.94		419.08	473.21	462.14	394.33
8/31/06 7:30	24.72	327.85	275.75	386.86		456.46	420.95		419.08	473.20	462.14	394.33
8/31/06 7:45	24.73	327.85	275.75	386.86		456.46	420.95		419.08	473.20	462.15	394.33
8/31/06 8:00	24.73	327.86	275.75	386.86		456.46	420.95		419.08	473.19	462.16	394.34
8/31/06 8:15	24.73	327.85	275.76	386.86		456.47	420.95		419.09	473.19	462.15	394.33
8/31/06 8:30	24.73	327.85	275.76	386.87		456.47	420.95		419.09	473.19	462.15	394.33
8/31/06 8:45	24.73	327.86	275.75	386.87		456.47	420.95		419.09	473.19	462.15	394.33
8/31/06 9:00	24.73	327.86	275.75	386.87		456.47	420.95		419.09	473.19	462.15	394.33
8/31/06 9:15	24.73	327.86	275.75	386.87		456.47	420.95		419.09	473.18	462.15	394.33
8/31/06 9:30	24.73	327.85	275.75	386.87		456.47	420.95		419.09	473.18	462.14	394.33
8/31/06 9:45	24.73	327.86	275.76	386.87		456.47	420.95		419.09	473.17	462.16	394.33
8/31/06 10:00	24.73	327.86	275.76	386.87		456.47	420.95		419.09	473.17	462.15	394.33
8/31/06 10:15	24.74	327.86	275.76	386.87		456.47	420.96		419.09	473.17	462.16	394.33
8/31/06 10:30	24.74	327.86	275.77	386.88		456.48	420.96		419.09	473.16	462.16	394.34
8/31/06 10:45	24.73	327.86	275.76	386.88		456.47	420.95		419.09	473.16	462.15	394.33
8/31/06 11:00	24.74	327.86	275.75	386.88		456.47	420.95		419.09	473.16	462.16	394.33
8/31/06 11:15	24.74	327.86	275.76	386.87		456.47	420.96		419.09	473.16	462.16	394.33
8/31/06 11:30	24.74	327.86	275.76	386.88		456.48	420.96		419.10	473.16	462.16	394.33
8/31/06 11:45	24.74	327.86	275.76	386.88		456.48	420.96		419.09	473.16	462.17	394.33
8/31/06 12:00	24.72	327.86	275.75	386.88		456.47	420.96		419.09	473.16	462.15	394.33
8/31/06 12:15	24.72	327.86	275.76	386.87		456.47	420.95		419.09	473.16	462.14	394.33
8/31/06 12:30	24.72	327.86	275.75	386.88		456.47	420.95		419.09	473.15	462.14	394.33
8/31/06 12:45	24.72	327.85	275.76	386.87		456.47	420.95		419.08	473.16	462.15	394.33
8/31/06 13:00	24.72	327.85	275.76	386.87		456.47	420.95		419.09	473.16	462.15	394.33
8/31/06 13:15	24.71	327.85	275.75	386.87		456.47	420.95		419.08	473.16	462.14	394.33
8/31/06 13:30	24.71	327.85	275.75	386.87		456.46	420.95		419.08	473.16	462.15	394.33
8/31/06 13:45	24.70	327.85	275.75	386.87		456.46	420.95		419.08	473.16	462.14	394.32
8/31/06 14:00	24.69	327.85	275.74	386.86		456.46	420.94		419.08	473.16	462.14	394.32
8/31/06 14:15	24.69	327.85	275.75	386.86		456.46	420.95		419.08	473.17	462.14	394.32
8/31/06 14:30	24.68	327.84	275.74	386.86		456.46	420.94		419.08	473.16	462.14	394.32
8/31/06 14:45	24.68	327.84	275.74	386.86		456.46	420.94		419.08	473.17	462.14	394.32
8/31/06 15:00	24.67	327.84	275.74	386.85		456.45	420.94		419.08	473.17	462.14	394.31
8/31/06 15:15	24.67	327.84	275.74	386.85		456.45	420.94		419.07	473.17	462.14	394.31
8/31/06 15:30	24.67	327.84	275.73	386.85		456.45	420.94		419.07	473.17	462.13	394.31
8/31/06 15:45	24.67	327.84	275.73	386.84		456.45	420.94		419.07	473.17	462.13	394.30

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
8/31/06 16:00	24.67	327.83	275.74	386.84		456.45	420.94		419.07	473.17	462.14	394.31
8/31/06 16:15	24.68	327.83	275.74	386.84		456.45	420.94		419.07	473.17	462.13	394.31
8/31/06 16:30	24.68	327.84	275.73	386.84		456.45	420.94		419.07	473.17	462.14	394.31
8/31/06 16:45	24.68	327.84	275.74	386.84		456.45	420.94		419.07	473.16	462.13	394.31
8/31/06 17:00	24.69	327.84	275.74	386.84		456.46	420.94		419.08	473.16	462.13	394.32
8/31/06 17:15	24.69	327.84	275.73	386.84		456.45	420.94		419.07	473.16	462.13	394.31
8/31/06 17:30	24.69	327.84	275.74	386.84		456.45	420.94		419.07	473.16	462.13	394.31
8/31/06 17:45	24.69	327.84	275.74	386.84		456.45	420.94		419.07	473.16	462.14	394.31
8/31/06 18:00	24.69	327.84	275.74	386.83		456.45	420.94		419.07	473.16	462.13	394.31
8/31/06 18:15	24.70	327.83	275.74	386.83		456.45	420.94		419.07	473.17	462.13	394.30
8/31/06 18:30	24.70	327.83	275.74	386.83		456.45	420.94		419.07	473.16	462.12	394.31
8/31/06 18:45	24.70	327.83	275.73	386.83		456.45	420.94		419.07	473.17	462.12	394.30
8/31/06 19:00	24.70	327.83	275.73	386.83		456.45	420.94		419.06	473.17	462.13	394.30
8/31/06 19:15	24.71	327.83	275.73	386.83		456.45	420.94		419.07	473.17	462.12	394.28
8/31/06 19:30	24.71	327.83	275.73	386.83		456.45	420.94		419.07	473.17	462.12	394.30
8/31/06 19:45	24.71	327.83	275.73	386.83		456.44	420.93		419.06	473.17	462.12	394.30
8/31/06 20:00	24.72	327.83	275.73	386.82		456.44	420.93		419.06	473.17	462.12	394.30
8/31/06 20:15	24.72	327.83	275.73	386.83		456.45	420.93		419.06	473.16	462.12	394.30
8/31/06 20:30	24.74	327.83	275.73	386.83		456.45	420.94		419.07	473.16	462.12	394.31
8/31/06 20:45	24.75	327.83	275.74	386.83		456.45	420.94		419.07	473.15	462.12	394.31
8/31/06 21:00	24.75	327.84	275.74	386.84		456.45	420.94		419.07	473.15	462.13	394.32
8/31/06 21:15	24.76	327.84	275.74	386.84		456.46	420.94		419.08	473.14	462.14	394.31
8/31/06 21:30	24.77	327.84	275.74	386.84		456.46	420.94		419.08	473.14	462.14	394.32
8/31/06 21:45	24.77	327.84	275.75	386.85		456.46	420.95		419.08	473.14	462.14	394.32
8/31/06 22:00	24.77	327.84	275.75	386.84		456.46	420.95		419.08	473.14	462.14	394.32
8/31/06 22:15	24.77	327.84	275.75	386.85		456.46	420.95		419.08	473.14	462.14	394.32
8/31/06 22:30	24.78	327.85	275.75	386.85		456.47	420.95		419.08	473.14	462.14	394.32
8/31/06 22:45	24.78	327.85	275.75	386.85		456.47	420.95		419.09	473.13	462.14	394.33
8/31/06 23:00	24.79	327.85	275.75	386.85		456.47	420.96		419.09	473.13	462.14	394.33
8/31/06 23:15	24.78	327.85	275.75	386.85		456.47	420.96		419.09	473.14	462.14	394.33
8/31/06 23:30	24.78	327.85	275.76	386.85		456.47	420.96		419.09	473.14	462.14	394.33
8/31/06 23:45	24.78	327.85	275.75	386.86		456.47	420.95		419.09	473.14	462.14	394.33
9/1/06 0:00	24.79	327.85	275.76	386.86		456.47	420.96		419.09	473.14	462.14	394.33
9/1/06 0:15	24.79	327.85	275.76	386.86		456.48	420.96		419.09	473.14	462.14	394.33
9/1/06 0:30	24.79	327.86	275.76	386.86		456.48	420.96		419.09	473.14	462.14	394.33
9/1/06 0:45	24.79	327.86	275.76	386.86		456.48	420.96		419.09	473.14	462.14	394.33
9/1/06 1:00	24.80	327.86	275.77	386.87		456.48	420.96		419.09	473.14	462.14	394.33
9/1/06 1:15	24.80	327.86	275.77	386.87		456.48	420.97		419.10	473.14	462.15	394.33
9/1/06 1:30	24.80	327.86	275.77	386.87		456.49	420.97		419.10	473.14	462.15	394.33
9/1/06 1:45	24.80	327.86	275.77	386.87		456.49	420.97		419.10	473.14	462.15	394.33
9/1/06 2:00	24.79	327.87	275.77	386.87		456.49	420.97		419.10	473.27	462.15	394.34
9/1/06 2:15	24.80	327.86	275.77	386.87		456.49	420.97		419.10	473.27	462.15	394.34
9/1/06 2:30	24.79	327.87	275.78	386.87		456.49	420.97		419.10	473.27	462.16	394.34
9/1/06 2:45	24.80	327.87	275.78	386.88		456.49	420.98		419.11	473.27	462.16	394.34
9/1/06 3:00	24.79	327.87	275.78	386.88		456.49	420.98		419.11	473.27	462.16	394.34
9/1/06 3:15	24.79	327.87	275.78	386.88		456.49	420.98		419.11	473.27	462.16	394.34
9/1/06 3:30	24.80	327.87	275.79	386.88		456.50	420.98		419.11	473.27	462.16	394.34
9/1/06 3:45	24.80	327.87	275.78	386.88		456.50	420.98		419.11	473.28	462.17	394.35
9/1/06 4:00	24.80	327.88	275.79	386.88		456.51	420.98		419.12	473.28	462.17	394.35
9/1/06 4:15	24.81	327.88	275.79	386.88		456.50	420.99		419.12	473.28	462.17	394.35
9/1/06 4:30	24.80	327.88	275.79	386.88		456.51	420.99		419.12	473.28	462.17	394.36
9/1/06 4:45	24.81	327.88	275.79	386.89		456.51	420.99		419.12	473.27	462.17	394.36
9/1/06 5:00	24.81	327.89	275.79	386.89		456.51	420.99		419.12	473.27	462.17	394.36
9/1/06 5:15	24.81	327.89	275.80	386.89		456.51	421.00		419.12	473.28	462.18	394.36
9/1/06 5:30	24.81	327.89	275.80	386.89		456.52	421.00		419.12	473.28	462.17	394.36
9/1/06 5:45	24.81	327.89	275.80	386.89		456.51	421.00		419.13	473.28	462.17	394.35
9/1/06 6:00	24.82	327.89	275.80	386.90		456.51	421.00		419.13	473.28	462.18	394.36
9/1/06 6:15	24.82	327.89	275.80	386.90		456.52	421.00		419.13	473.27	462.18	394.36
9/1/06 6:30	24.82	327.89	275.81	386.90		456.52	421.00		419.13	473.28	462.19	394.36
9/1/06 6:45	24.83	327.89	275.80	386.90		456.52	421.00		419.13	473.27	462.18	394.36
9/1/06 7:00	24.83	327.90	275.81	386.90		456.52	421.01		419.14	473.27	462.19	394.37
9/1/06 7:15	24.85	327.91	275.81	386.91		456.53	421.01		419.14	473.26	462.20	394.38
9/1/06 7:30	24.85	327.91	275.81	386.91		456.54	421.02		419.15	473.26	462.20	394.38
9/1/06 7:45	24.86	327.91	275.82	386.91		456.54	421.02		419.15	473.25	462.20	394.38
9/1/06 8:00	24.87	327.91	275.82	386.91		456.54	421.02		419.15	473.25	462.21	394.38
9/1/06 8:15	24.87	327.91	275.82	386.92		456.54	421.02		419.15	473.25	462.21	394.38
9/1/06 8:30	24.88	327.92	275.82	386.92		456.55	421.02		419.15	473.24	462.21	394.39
9/1/06 8:45	24.88	327.92	275.83	386.92		456.54	421.03		419.15	473.37	462.21	394.39
9/1/06 9:00	24.89	327.92	275.83	386.92		456.55	421.03		419.16	473.37	462.21	394.38
9/1/06 9:15	24.89	327.92	275.83	386.92		456.55	421.03		419.16	473.36	462.21	394.40
9/1/06 9:30	24.90	327.92	275.83	386.92		456.55	421.03		419.16	473.36	462.22	394.40
9/1/06 9:45	24.90	327.92	275.84	386.92		456.55	421.03		419.16	473.35	462.22	394.39
9/1/06 10:00	24.91	327.93	275.84	386.93		456.55	421.04		419.16	473.34	462.22	394.40
9/1/06 10:15	24.92	327.93	275.84	386.93		456.55	421.04		419.16	473.34	462.22	394.40
9/1/06 10:30	24.92	327.93	275.84	386.93		456.56	421.04		419.16	473.34	462.22	394.41
9/1/06 10:45	24.93	327.93	275.84	386.93		456.56	421.04		419.16	473.33	462.22	394.39
9/1/06 11:00	24.93	327.93	275.84	386.93		456.56	421.04		419.16	473.33	462.22	394.41
9/1/06 11:15	24.93	327.93	275.84	386.93		456.56	421.04		419.16	473.32	462.22	394.40
9/1/06 11:30	24.94	327.93	275.84	386.93		456.56	421.04		419.17	473.37	462.22	394.41
9/1/06 11:45	24.95	327.93	275.85	386.94		456.56	421.04		419.17	473.39	462.22	394.41
9/1/06 12:00	24.95	327.94	275.85	386.94		456.56	421.04		419.17	473.38	462.22	394.41
9/1/06 12:15	24.94	327.93	275.85	386.94		456.56	421.04		419.17	473.38	462.22	394.40
9/1/06 12:30	24.95	327.93	275.85	386.94		456.56	421.04		419.17	473.38	462.22	394.40
9/1/06 12:45	24.95	327.93	275.84	386.94		456.56	421.04		419.17	473.38	462.22	394.41
9/1/06 13:00	24.95	327.93	275.85	386.94		456.56	421.04		419.16	473.37	462.22	394.40
9/1/06 13:15	24.95	327.93	275.85	386.94		456.56	421.04		419.16	473.37	462.22	394.40
9/1/06 13:30	24.95	327.93	275.84	386.94		456.56	421.03		419.16	473.37	462.22	394.40
9/1/06 13:45	24.95	327.93	275.84	386.93		456.55	421.03		419.16	473.37	462.21	394.39
9/1/06 14:00	24.95	327.93	275.84	386.94		456.56	421.04		419.16	473.36	462.21	394.39
9/1/06 14:15	24.95	327.93	275.84	386.93		456.56	421.03		419.16	473.36	462.21	394.39
9/1/06 14:30	24.95	327.93	275.84	386.93		456.56	421.03		419.16	473.36	462.22	394.40
9/1/06 14:45	24.95	327.93	275.84	386.93		456.55	421.03		419.16	473.36	462.21	394.38
9/1/06 15:00	24.94	327.92	275.83	386.93		456.55	421.03		419.16	473.36	462.21	394.39
9/1/06 15:15	24.94	327.92	275.83	386.93		456.55	421.03		419.16	473.36	462.21	394.39
9/1/06 15:30	24.94	327.92	275.83	386.92		456.55	421.03		419.15	473.36	462.21	394.39
9/1/06 15:45	24.93	327.92	275.83	386.92		456.55	421.03		419.15	473.36	462.20	394.38
9/1/06 16:00	24.93	327.92	275.83	386.92		456.55	421.02		419.15	473.36	462.20	394.38
9/1/06 16:15	24.93	327.92	275.83	386.92		456.54	421.02		419.15	473.36	462.20	394.38
9/1/06 16:30	24.93	327.92	275.83	386.92		456.54	421.02		419.14	473.36	462.20	394.38
9/1/06 16:45	24.92	327.92	275.84	386.92		456.55	421.03		419.15	473.36	462.20	394.38

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
9/1/06 17:00	24.92	327.92	275.82	386.92		456.54	421.02		419.16	473.36	462.20	394.38
9/1/06 17:15	24.92	327.92	275.83	386.92		456.54	421.02		419.16	473.36	462.20	394.38
9/1/06 17:30	24.91	327.91	275.83	386.91		456.54	421.02		419.15	473.36	462.20	394.38
9/1/06 17:45	24.91	327.91	275.83	386.91		456.54	421.02		419.15	473.36	462.20	394.38
9/1/06 18:00	24.91	327.91	275.83	386.91		456.54	421.02		419.15	473.36	462.20	394.38
9/1/06 18:15	24.92	327.91	275.83	386.90		456.54	421.02		419.14	473.36	462.20	394.38
9/1/06 18:30	24.92	327.91	275.82	386.90		456.54	421.02		419.15	473.36	462.20	394.38
9/1/06 18:45	24.94	327.92	275.83	386.91		456.55	421.02		419.15	473.35	462.20	394.38
9/1/06 19:00	24.94	327.91	275.83	386.90		456.55	421.02		419.15	473.35	462.20	394.38
9/1/06 19:15	24.94	327.91	275.83	386.91		456.54	421.02		419.15	473.36	462.20	394.38
9/1/06 19:30	24.93	327.91	275.82	386.90		456.54	421.02		419.15	473.36	462.19	394.38
9/1/06 19:45	24.93	327.91	275.82	386.90		456.54	421.02		419.14	473.36	462.20	394.38
9/1/06 20:00	24.94	327.91	275.83	386.90		456.54	421.02		419.15	473.36	462.20	394.38
9/1/06 20:15	24.95	327.91	275.83	386.91		456.54	421.02		419.15	473.36	462.20	394.38
9/1/06 20:30	24.96	327.92	275.83	386.91		456.54	421.02		419.15	473.35	462.20	394.37
9/1/06 20:45	24.96	327.92	275.83	386.91		456.55	421.02		419.15	473.35	462.20	394.37
9/1/06 21:00	24.96	327.92	275.83	386.91		456.55	421.03		419.15	473.35	462.20	394.36
9/1/06 21:15	24.97	327.92	275.84	386.92		456.55	421.03		419.16	473.35	462.20	394.36
9/1/06 21:30	24.97	327.92	275.84	386.92		456.55	421.03		419.16	473.34	462.20	394.36
9/1/06 21:45	24.97	327.92	275.84	386.92		456.55	421.03		419.16	473.34	462.20	394.36
9/1/06 22:00	24.98	327.92	275.84	386.92		456.55	421.03		419.16	473.34	462.21	394.36
9/1/06 22:15	24.98	327.92	275.84	386.92		456.55	421.03		419.16	473.34	462.21	394.36
9/1/06 22:30	24.98	327.92	275.84	386.92		456.55	421.03		419.16	473.34	462.21	394.36
9/1/06 22:45	24.98	327.92	275.84	386.92		456.55	421.03		419.16	473.34	462.21	394.36
9/1/06 23:00	24.99	327.92	275.84	386.92		456.56	421.04		419.16	473.34	462.21	394.36
9/1/06 23:15	24.99	327.92	275.84	386.92		456.55	421.03		419.16	473.34	462.21	394.36
9/1/06 23:30	24.98	327.92	275.84	386.92		456.56	421.04		419.16	473.34	462.21	394.36
9/1/06 23:45	24.98	327.92	275.84	386.92		456.56	421.03		419.16	473.35	462.21	394.36
9/2/06 0:00	24.98	327.92	275.84	386.92		456.56	421.03		419.16	473.35	462.21	394.37
9/2/06 0:15	24.98	327.92	275.84	386.92		456.55	421.03		419.16	473.35	462.21	394.37
9/2/06 0:30	24.98	327.92	275.84	386.92		456.56	421.03		419.16	473.35	462.21	394.37
9/2/06 0:45	24.98	327.92	275.84	386.92		456.55	421.03		419.16	473.35	462.21	394.38
9/2/06 1:00	24.99	327.92	275.84	386.92		456.55	421.03		419.16	473.35	462.21	394.38
9/2/06 1:15	24.99	327.92	275.84	386.92		456.55	421.03		419.16	473.35	462.21	394.38
9/2/06 1:30	24.98	327.92	275.84	386.92		456.55	421.03		419.16	473.35	462.21	394.38
9/2/06 1:45	24.98	327.92	275.84	386.92		456.55	421.03		419.16	473.35	462.21	394.38
9/2/06 2:00	24.98	327.92	275.84	386.92		456.55	421.03		419.16	473.36	462.21	394.38
9/2/06 2:15	24.98	327.92	275.84	386.92		456.55	421.03		419.16	473.36	462.21	394.38
9/2/06 2:30	24.98	327.92	275.84	386.92		456.55	421.03		419.16	473.36	462.20	394.38
9/2/06 2:45	24.98	327.92	275.84	386.92		456.55	421.03		419.16	473.36	462.21	394.38
9/2/06 3:00	24.98	327.92	275.84	386.92		456.55	421.03		419.16	473.37	462.21	394.38
9/2/06 3:15	24.97	327.92	275.84	386.92		456.55	421.03		419.16	473.37	462.21	394.38
9/2/06 3:30	24.97	327.92	275.84	386.92		456.55	421.03		419.16	473.37	462.20	394.38
9/2/06 3:45	24.97	327.92	275.84	386.92		456.56	421.03		419.16	473.37	462.21	394.38
9/2/06 4:00	24.97	327.92	275.84	386.92		456.55	421.03		419.16	473.37	462.21	394.38
9/2/06 4:15	24.97	327.92	275.84	386.92		456.56	421.04		419.16	473.38	462.21	394.39
9/2/06 4:30	24.97	327.92	275.84	386.92		456.56	421.04		419.16	473.38	462.21	394.40
9/2/06 4:45	24.96	327.92	275.84	386.92		456.56	421.04		419.16	473.38	462.21	394.39
9/2/06 5:00	24.97	327.92	275.84	386.92		456.56	421.04		419.16	473.38	462.21	394.39
9/2/06 5:15	24.96	327.92	275.84	386.92		456.56	421.04		419.17	473.38	462.21	394.39
9/2/06 5:30	24.96	327.92	275.85	386.92		456.56	421.04		419.17	473.39	462.21	394.39
9/2/06 5:45	24.96	327.92	275.85	386.92		456.56	421.04		419.17	473.39	462.22	394.40
9/2/06 6:00	24.96	327.93	275.85	386.93		456.56	421.05		419.17	473.39	462.22	394.39
9/2/06 6:15	24.96	327.93	275.85	386.93		456.57	421.04		419.17	473.39	462.22	394.40
9/2/06 6:30	24.95	327.93	275.85	386.93		456.57	421.04		419.17	473.40	462.22	394.40
9/2/06 6:45	24.96	327.93	275.86	386.93		456.57	421.04		419.17	473.40	462.22	394.38
9/2/06 7:00	24.96	327.93	275.86	386.93		456.57	421.04		419.17	473.39	462.22	394.38
9/2/06 7:15	24.96	327.94	275.86	386.94		456.57	421.06		419.18	473.40	462.22	394.36
9/2/06 7:30	24.95	327.93	275.86	386.94		456.57	421.09		419.18	473.40	462.22	394.38
9/2/06 7:45	24.95	327.93	275.86	386.94		456.57	421.11		419.18	473.40	462.23	394.41
9/2/06 8:00	24.95	327.94	275.86	386.95		456.57	421.06		419.18	473.40	462.22	394.40
9/2/06 8:15	24.95	327.94	275.87	386.95		456.58	421.06		419.18	473.40	462.23	394.39
9/2/06 8:30	24.93	327.94	275.86	386.95		456.58	421.06		419.18	473.40	462.23	394.39
9/2/06 8:45	24.93	327.94	275.87	386.95		456.58	421.06		419.18	473.40	462.24	394.40
9/2/06 9:00	24.92	327.94	275.87	386.96		456.58	421.06		419.18	473.40	462.23	394.40
9/2/06 9:15	24.91	327.94	275.86	386.95		456.58	421.06		419.18	473.41	462.23	394.40
9/2/06 9:30	24.90	327.94	275.86	386.95		456.58	421.06		419.18	473.41	462.22	394.39
9/2/06 9:45	24.90	327.94	275.86	386.95		456.57	421.06		419.18	473.41	462.22	394.40
9/2/06 10:00	24.90	327.94	275.87	386.95		456.58	421.06		419.17	473.41	462.22	394.39
9/2/06 10:15	24.89	327.93	275.86	386.95		456.57	421.06		419.18	473.41	462.23	394.40
9/2/06 10:30	24.89	327.94	275.85	386.95		456.57	421.05		419.17	473.41	462.22	394.39
9/2/06 10:45	24.89	327.93	275.85	386.95		456.57	421.05		419.17	473.41	462.22	394.38
9/2/06 11:00	24.88	327.93	275.85	386.94		456.57	421.05		419.17	473.41	462.22	394.39
9/2/06 11:15	24.88	327.93	275.86	386.94		456.57	421.05		419.17	473.41	462.22	394.38
9/2/06 11:30	24.87	327.93	275.85	386.94		456.56	421.05		419.16	473.40	462.21	394.38
9/2/06 11:45	24.87	327.92	275.85	386.93		456.56	421.05		419.16	473.41	462.21	394.38
9/2/06 12:00	24.86	327.92	275.85	386.93		456.56	421.04		419.17	473.41	462.20	394.38
9/2/06 12:15	24.86	327.92	275.83	386.92		456.56	421.04		419.16	473.41	462.21	394.38
9/2/06 12:30	24.85	327.92	275.83	386.92		456.55	421.03		419.16	473.41	462.20	394.38
9/2/06 12:45	24.84	327.91	275.83	386.92		456.55	421.03		419.15	473.41	462.20	394.37
9/2/06 13:00	24.84	327.91	275.83	386.92		456.54	421.03		419.15	473.41	462.20	394.36
9/2/06 13:15	24.83	327.90	275.82	386.91		456.54	421.02		419.15	473.41	462.20	394.36
9/2/06 13:30	24.83	327.90	275.82	386.91		456.53	421.02		419.14	473.41	462.19	394.36
9/2/06 13:45	24.82	327.89	275.82	386.90		456.53	421.02		419.14	473.41	462.18	394.35
9/2/06 14:00	24.82	327.89	275.82	386.90		456.53	421.01		419.13	473.41	462.17	394.35
9/2/06 14:15	24.82	327.89	275.81	386.89		456.53	421.01		419.13	473.41	462.17	394.35
9/2/06 14:30	24.82	327.88	275.81	386.89		456.52	421.01		419.13	473.41	462.17	394.34
9/2/06 14:45	24.81	327.88	275.81	386.88		456.52	421.00		419.12	473.41	462.17	394.34
9/2/06 15:00	24.81	327.88	275.79	386.88		456.52	421.00		419.12	473.41	462.17	394.33
9/2/06 15:15	24.80	327.87	275.80	386.88		456.51	421.00		419.12	473.41	462.15	394.33
9/2/06 15:30	24.79	327.87	275.79	386.87		456.51	420.99		419.12	473.41	462.15	394.33
9/2/06 15:45	24.79	327.87	275.78	386.87		456.50	420.99		419.11	473.41	462.15	394.33
9/2/06 16:00	24.78	327.86	275.78	386.86		456.50	420.99		419.12	473.42	462.14	394.33
9/2/06 16:15	24.78	327.86	275.78	386.85		456.50	420.98		419.11	473.42	462.14	394.32
9/2/06 16:30	24.78	327.86	275.77	386.85		456.49	420.98		419.10	473.42	462.14	394.32
9/2/06 16:45	24.78	327.85	275.78	386.85		456.49	420.98		419.11	473.42	462.14	394.31
9/2/06 17:00	24.78	327.85	275.78	386.85		456.49	420.98		419.10	473.42	462.14	394.31
9/2/06 17:15	24.77	327.85	275.77	386.84		456.49	420.97		419.10	473.42	462.14	394.30
9/2/06 17:30	24.78	327.85	275.78	386.84		456.49	420.97		419.10	473.42	462.14	394.32
9/2/06 17:45	24.78	327.85	275.77	386.84		456.49	420.97		419.10	473.42	462.14	394.31

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
9/2/06 18:00	24.78	327.85	275.77	386.84		456.49	420.97		419.10	473.42	462.14	394.31
9/2/06 18:15	24.78	327.85	275.77	386.84		456.49	420.97		419.10	473.42	462.14	394.31
9/2/06 18:30	24.78	327.85	275.77	386.83		456.49	420.97		419.10	473.42	462.13	394.28
9/2/06 18:45	24.77	327.85	275.77	386.83		456.48	420.97		419.09	473.42	462.13	394.31
9/2/06 19:00	24.78	327.84	275.77	386.83		456.48	420.97		419.09	473.42	462.12	394.30
9/2/06 19:15	24.78	327.84	275.77	386.83		456.48	420.97		419.09	473.42	462.12	394.30
9/2/06 19:30	24.79	327.84	275.76	386.83		456.48	420.97		419.09	473.43	462.13	394.30
9/2/06 19:45	24.79	327.84	275.77	386.83		456.48	420.97		419.09	473.43	462.12	394.31
9/2/06 20:00	24.80	327.84	275.77	386.83		456.48	420.97		419.09	473.43	462.12	394.30
9/2/06 20:15	24.81	327.84	275.77	386.83		456.48	420.97		419.09	473.42	462.12	394.31
9/2/06 20:30	24.82	327.84	275.77	386.83		456.48	420.97		419.09	473.43	462.13	394.31
9/2/06 20:45	24.82	327.84	275.77	386.84		456.49	420.97		419.09	473.42	462.13	394.32
9/2/06 21:00	24.83	327.85	275.78	386.84		456.49	420.97		419.10	473.42	462.13	394.32
9/2/06 21:15	24.84	327.85	275.77	386.84		456.49	420.98		419.10	473.42	462.13	394.32
9/2/06 21:30	24.84	327.85	275.78	386.84		456.49	420.98		419.10	473.42	462.13	394.32
9/2/06 21:45	24.84	327.85	275.78	386.84		456.49	420.98		419.10	473.42	462.13	394.32
9/2/06 22:00	24.85	327.85	275.78	386.84		456.49	420.98		419.10	473.42	462.14	394.32
9/2/06 22:15	24.84	327.85	275.78	386.84		456.49	420.98		419.10	473.42	462.13	394.32
9/2/06 22:30	24.84	327.85	275.77	386.84		456.49	420.98		419.10	473.42	462.13	394.32
9/2/06 22:45	24.84	327.85	275.78	386.84		456.49	420.98		419.10	473.43	462.13	394.31
9/2/06 23:00	24.84	327.85	275.77	386.84		456.49	420.98		419.10	473.42	462.13	394.32
9/2/06 23:15	24.84	327.85	275.77	386.84		456.49	420.97		419.10	473.42	462.13	394.32
9/2/06 23:30	24.84	327.85	275.77	386.84		456.49	420.97		419.10	473.42	462.13	394.32
9/2/06 23:45	24.84	327.85	275.77	386.84		456.49	420.98		419.10	473.42	462.13	394.32
9/3/06 0:00	24.85	327.85	275.77	386.84		456.49	420.98		419.10	473.42	462.13	394.31
9/3/06 0:15	24.84	327.85	275.77	386.84		456.49	420.97		419.10	473.42	462.13	394.31
9/3/06 0:30	24.84	327.85	275.78	386.84		456.49	420.97		419.10	473.42	462.12	394.31
9/3/06 0:45	24.84	327.84	275.77	386.84		456.48	420.97		419.10	473.42	462.12	394.31
9/3/06 1:00	24.84	327.84	275.77	386.84		456.48	420.97		419.10	473.42	462.12	394.30
9/3/06 1:15	24.84	327.84	275.77	386.84		456.48	420.97		419.10	473.43	462.12	394.30
9/3/06 1:30	24.83	327.84	275.77	386.84		456.48	420.97		419.10	473.43	462.12	394.29
9/3/06 1:45	24.83	327.84	275.77	386.84		456.48	420.97		419.09	473.43	462.12	394.28
9/3/06 2:00	24.83	327.84	275.77	386.83		456.48	420.97		419.09	473.43	462.12	394.28
9/3/06 2:15	24.83	327.84	275.77	386.84		456.48	420.97		419.09	473.43	462.12	394.28
9/3/06 2:30	24.83	327.83	275.77	386.83		456.48	420.97		419.09	473.43	462.12	394.28
9/3/06 2:45	24.83	327.84	275.77	386.83		456.48	420.97		419.09	473.43	462.12	394.29
9/3/06 3:00	24.82	327.83	275.77	386.83		456.48	420.97		419.09	473.44	462.12	394.28
9/3/06 3:15	24.82	327.84	275.77	386.83		456.48	420.97		419.09	473.44	462.12	394.28
9/3/06 3:30	24.82	327.83	275.77	386.83		456.48	420.97		419.09	473.44	462.12	394.27
9/3/06 3:45	24.82	327.83	275.77	386.84		456.48	420.97		419.09	473.44	462.12	394.28
9/3/06 4:00	24.82	327.83	275.77	386.84		456.48	420.97		419.09	473.44	462.12	394.28
9/3/06 4:15	24.82	327.84	275.77	386.84		456.48	420.97		419.09	473.44	462.12	394.28
9/3/06 4:30	24.82	327.84	275.77	386.84		456.48	420.97		419.10	473.44	462.12	394.28
9/3/06 4:45	24.82	327.84	275.77	386.84		456.48	420.97		419.10	473.44	462.12	394.28
9/3/06 5:00	24.82	327.84	275.77	386.84		456.48	420.97		419.10	473.45	462.12	394.28
9/3/06 5:15	24.82	327.84	275.78	386.84		456.49	420.97		419.10	473.45	462.13	394.28
9/3/06 5:30	24.82	327.84	275.78	386.84		456.49	420.98		419.10	473.45	462.13	394.28
9/3/06 5:45	24.82	327.85	275.78	386.84		456.49	420.98		419.10	473.45	462.13	394.28
9/3/06 6:00	24.82	327.85	275.78	386.84		456.49	420.98		419.10	473.45	462.13	394.28
9/3/06 6:15	24.82	327.85	275.78	386.84		456.49	420.98		419.11	473.45	462.13	394.28
9/3/06 6:30	24.82	327.85	275.79	386.84		456.49	420.98		419.11	473.46	462.13	394.28
9/3/06 6:45	24.82	327.85	275.79	386.85		456.50	420.99		419.11	473.46	462.14	394.28
9/3/06 7:00	24.82	327.86	275.79	386.86		456.50	420.99		419.11	473.46	462.14	394.29
9/3/06 7:15	24.82	327.86	275.79	386.86		456.50	420.99		419.12	473.46	462.14	394.32
9/3/06 7:30	24.82	327.86	275.80	386.86		456.51	420.99		419.12	473.46	462.14	394.32
9/3/06 7:45	24.82	327.86	275.80	386.87		456.51	421.00		419.12	473.46	462.15	394.33
9/3/06 8:00	24.82	327.87	275.81	386.87		456.51	421.00		419.12	473.46	462.16	394.33
9/3/06 8:15	24.81	327.87	275.81	386.88		456.51	421.00		419.13	473.46	462.16	394.33
9/3/06 8:30	24.81	327.87	275.81	386.88		456.52	421.01		419.13	473.46	462.16	394.33
9/3/06 8:45	24.80	327.87	275.81	386.88		456.52	421.01		419.13	473.46	462.17	394.33
9/3/06 9:00	24.79	327.87	275.81	386.88		456.52	421.01		419.13	473.46	462.16	394.33
9/3/06 9:15	24.79	327.88	275.81	386.89		456.52	421.01		419.13	473.46	462.17	394.34
9/3/06 9:30	24.78	327.88	275.82	386.89		456.53	421.02		419.13	473.46	462.17	394.33
9/3/06 9:45	24.78	327.88	275.82	386.89		456.53	421.02		419.14	473.46	462.17	394.33
9/3/06 10:00	24.78	327.88	275.82	386.89		456.53	421.02		419.14	473.46	462.17	394.33
9/3/06 10:15	24.78	327.88	275.82	386.89		456.53	421.02		419.14	473.46	462.17	394.34
9/3/06 10:30	24.77	327.88	275.82	386.89		456.53	421.02		419.14	473.46	462.17	394.33
9/3/06 10:45	24.77	327.88	275.82	386.89		456.53	421.02		419.14	473.46	462.17	394.33
9/3/06 11:00	24.77	327.88	275.82	386.89		456.53	421.02		419.14	473.46	462.16	394.34
9/3/06 11:15	24.77	327.88	275.83	386.89		456.53	421.02		419.14	473.46	462.17	394.34
9/3/06 11:30	24.76	327.88	275.80	386.88		456.53	421.02		419.14	473.46	462.17	394.34
9/3/06 11:45	24.76	327.88	275.82	386.89		456.53	421.01		419.14	473.46	462.17	394.33
9/3/06 12:00	24.75	327.88	275.81	386.88		456.52	421.01		419.14	473.46	462.17	394.33
9/3/06 12:15	24.75	327.87	275.81	386.88		456.52	421.01		419.13	473.46	462.16	394.33
9/3/06 12:30	24.74	327.87	275.81	386.88		456.52	421.01		419.13	473.46	462.16	394.33
9/3/06 12:45	24.74	327.87	275.80	386.87		456.51	421.00		419.13	473.46	462.14	394.32
9/3/06 13:00	24.74	327.86	275.79	386.87		456.51	421.00		419.12	473.46	462.14	394.32
9/3/06 13:15	24.73	327.86	275.79	386.87		456.51	421.00		419.12	473.46	462.14	394.32
9/3/06 13:30	24.73	327.85	275.78	386.86		456.50	420.99		419.11	473.46	462.14	394.31
9/3/06 13:45	24.73	327.85	275.78	386.86		456.50	420.99		419.11	473.46	462.13	394.30
9/3/06 14:00	24.73	327.85	275.77	386.85		456.50	420.99		419.11	473.45	462.13	394.30
9/3/06 14:15	24.72	327.84	275.78	386.85		456.49	420.98		419.10	473.45	462.13	394.30
9/3/06 14:30	24.72	327.84	275.77	386.84		456.49	420.98		419.11	473.45	462.13	394.30
9/3/06 14:45	24.72	327.84	275.77	386.84		456.48	420.98		419.10	473.45	462.12	394.29
9/3/06 15:00	24.72	327.83	275.77	386.84		456.48	420.97		419.10	473.45	462.12	394.28
9/3/06 15:15	24.72	327.83	275.77	386.83		456.48	420.97		419.09	473.45	462.12	394.28
9/3/06 15:30	24.71	327.83	275.76	386.83		456.48	420.97		419.09	473.45	462.12	394.28
9/3/06 15:45	24.71	327.82	275.76	386.82		456.47	420.96		419.09	473.44	462.11	394.28
9/3/06 16:00	24.71	327.82	275.75	386.82		456.47	420.96		419.08	473.44	462.11	394.28
9/3/06 16:15	24.70	327.82	275.75	386.81		456.46	420.96		419.08	473.44	462.09	394.28
9/3/06 16:30	24.70	327.82	275.75	386.81		456.46	420.96		419.08	473.44	462.10	394.28
9/3/06 16:45	24.71	327.82	275.75	386.81		456.46	420.95		419.08	473.44	462.10	394.27
9/3/06 17:00	24.71	327.81	275.75	386.80		456.46	420.95		419.07	473.44	462.10	394.27
9/3/06 17:15	24.70	327.81	275.74	386.80		456.46	420.95		419.07	473.44	462.10	394.27
9/3/06 17:30	24.71	327.81	275.74	386.80		456.46	420.95		419.07	473.43	462.10	394.27
9/3/06 17:45	24.71	327.81	275.74	386.80		456.46	420.95		419.07	473.43	462.09	394.27
9/3/06 18:00	24.71	327.81	275.75	386.80		456.46	420.95		419.07	473.43	462.09	394.27
9/3/06 18:15	24.71	327.81	275.74	386.80		456.46	420.95		419.07	473.43	462.09	394.27
9/3/06 18:30	24.72	327.81	275.75	386.80		456.46	420.95		419.07	473.43	462.09	394.27
9/3/06 18:45	24.72	327.81	275.74	386.80		456.46	420.95		419.07	473.43	462.09	394.27

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
9/3/06 19:00	24.72	327.81	275.74	386.80		456.46	420.95		419.07	473.43	462.10	394.26
9/3/06 19:15	24.73	327.81	275.74	386.80		456.46	420.95		419.07	473.43	462.09	394.27
9/3/06 19:30	24.74	327.81	275.74	386.80		456.46	420.95		419.07	473.43	462.10	394.27
9/3/06 19:45	24.75	327.81	275.75	386.80		456.46	420.95		419.08	473.43	462.09	394.28
9/3/06 20:00	24.77	327.82	275.75	386.80		456.46	420.96		419.08	473.42	462.09	394.28
9/3/06 20:15	24.77	327.82	275.76	386.80		456.47	420.96		419.08	473.42	462.09	394.28
9/3/06 20:30	24.78	327.82	275.76	386.81		456.47	420.96		419.08	473.42	462.10	394.28
9/3/06 20:45	24.79	327.83	275.76	386.81		456.47	420.96		419.09	473.41	462.10	394.28
9/3/06 21:00	24.80	327.83	275.76	386.82		456.48	420.97		419.09	473.41	462.10	394.28
9/3/06 21:15	24.81	327.83	275.77	386.82		456.48	420.97		419.09	473.41	462.12	394.28
9/3/06 21:30	24.82	327.83	275.77	386.82		456.49	420.97		419.10	473.41	462.12	394.29
9/3/06 21:45	24.82	327.84	275.78	386.83		456.49	420.98		419.10	473.41	462.12	394.30
9/3/06 22:00	24.82	327.84	275.78	386.83		456.49	420.98		419.10	473.41	462.12	394.30
9/3/06 22:15	24.82	327.84	275.78	386.83		456.49	420.98		419.10	473.41	462.12	394.30
9/3/06 22:30	24.83	327.84	275.78	386.83		456.49	420.98		419.11	473.41	462.12	394.30
9/3/06 22:45	24.83	327.84	275.78	386.83		456.49	420.98		419.10	473.41	462.12	394.31
9/3/06 23:00	24.83	327.84	275.78	386.83		456.49	420.98		419.11	473.40	462.12	394.30
9/3/06 23:15	24.83	327.84	275.78	386.83		456.49	420.98		419.11	473.41	462.12	394.30
9/3/06 23:30	24.83	327.84	275.78	386.83		456.49	420.98		419.11	473.41	462.12	394.30
9/3/06 23:45	24.83	327.84	275.78	386.84		456.49	420.98		419.11	473.41	462.12	394.30
9/4/06 0:00	24.83	327.84	275.78	386.84		456.49	420.98		419.10	473.41	462.12	394.30
9/4/06 0:15	24.83	327.84	275.78	386.83		456.49	420.98		419.10	473.41	462.12	394.30
9/4/06 0:30	24.83	327.84	275.78	386.83		456.49	420.98		419.10	473.41	462.12	394.30
9/4/06 0:45	24.83	327.84	275.78	386.83		456.49	420.98		419.10	473.41	462.11	394.29
9/4/06 1:00	24.83	327.84	275.78	386.83		456.49	420.98		419.10	473.40	462.12	394.28
9/4/06 1:15	24.83	327.83	275.78	386.83		456.49	420.98		419.10	473.40	462.12	394.28
9/4/06 1:30	24.83	327.83	275.78	386.83		456.49	420.98		419.10	473.40	462.11	394.28
9/4/06 1:45	24.84	327.83	275.78	386.82		456.49	420.98		419.10	473.40	462.11	394.28
9/4/06 2:00	24.83	327.83	275.77	386.82		456.48	420.97		419.10	473.40	462.11	394.30
9/4/06 2:15	24.83	327.83	275.77	386.82		456.48	420.97		419.10	473.40	462.11	394.30
9/4/06 2:30	24.83	327.83	275.77	386.83		456.48	420.97		419.09	473.41	462.11	394.29
9/4/06 2:45	24.83	327.83	275.77	386.82		456.48	420.97		419.09	473.40	462.11	394.29
9/4/06 3:00	24.83	327.83	275.77	386.82		456.48	420.97		419.10	473.40	462.11	394.28
9/4/06 3:15	24.83	327.83	275.77	386.82		456.48	420.97		419.09	473.40	462.11	394.28
9/4/06 3:30	24.83	327.83	275.77	386.82		456.48	420.97		419.09	473.40	462.11	394.27
9/4/06 3:45	24.83	327.83	275.77	386.82		456.48	420.97		419.10	473.40	462.11	394.28
9/4/06 4:00	24.83	327.83	275.77	386.82		456.48	420.97		419.10	473.40	462.11	394.28
9/4/06 4:15	24.83	327.83	275.77	386.82		456.48	420.97		419.10	473.40	462.11	394.27
9/4/06 4:30	24.83	327.83	275.77	386.83		456.48	420.97		419.10	473.40	462.12	394.27
9/4/06 4:45	24.83	327.83	275.77	386.83		456.48	420.98		419.10	473.40	462.11	394.26
9/4/06 5:00	24.83	327.83	275.77	386.83		456.49	420.98		419.10	473.40	462.11	394.26
9/4/06 5:15	24.83	327.83	275.78	386.83		456.49	420.98		419.10	473.40	462.11	394.26
9/4/06 5:30	24.83	327.84	275.78	386.83		456.49	420.98		419.11	473.40	462.11	394.25
9/4/06 5:45	24.84	327.84	275.78	386.83		456.49	420.98		419.11	473.40	462.12	394.27
9/4/06 6:00	24.84	327.84	275.78	386.83		456.49	420.98		419.11	473.41	462.12	394.26
9/4/06 6:15	24.84	327.84	275.79	386.83		456.50	420.98		419.11	473.41	462.12	394.28
9/4/06 6:30	24.84	327.85	275.79	386.84		456.50	420.99		419.11	473.41	462.12	394.28
9/4/06 6:45	24.84	327.85	275.79	386.84		456.50	420.99		419.12	473.41	462.13	394.28
9/4/06 7:00	24.85	327.85	275.80	386.85		456.51	421.00		419.12	473.41	462.13	394.28
9/4/06 7:15	24.85	327.86	275.81	386.86		456.51	421.00		419.13	473.41	462.14	394.28
9/4/06 7:30	24.85	327.86	275.81	386.86		456.52	421.00		419.13	473.41	462.14	394.32
9/4/06 7:45	24.86	327.87	275.81	386.87		456.52	421.01		419.14	473.41	462.15	394.33
9/4/06 8:00	24.85	327.87	275.82	386.88		456.53	421.01		419.14	473.41	462.16	394.33
9/4/06 8:15	24.85	327.87	275.82	386.88		456.53	421.02		419.14	473.41	462.16	394.33
9/4/06 8:30	24.84	327.88	275.82	386.88		456.53	421.02		419.15	473.41	462.16	394.34
9/4/06 8:45	24.84	327.88	275.83	386.89		456.54	421.03		419.15	473.41	462.17	394.33
9/4/06 9:00	24.83	327.88	275.83	386.90		456.54	421.03		419.15	473.42	462.17	394.33
9/4/06 9:15	24.83	327.89	275.84	386.90		456.54	421.03		419.16	473.42	462.17	394.34
9/4/06 9:30	24.83	327.89	275.83	386.90		456.55	421.04		419.16	473.42	462.17	394.33
9/4/06 9:45	24.83	327.89	275.84	386.90		456.55	421.04		419.16	473.42	462.17	394.35
9/4/06 10:00	24.83	327.89	275.84	386.91		456.55	421.04		419.16	473.42	462.18	394.35
9/4/06 10:15	24.83	327.89	275.84	386.91		456.56	421.04		419.16	473.42	462.18	394.35
9/4/06 10:30	24.82	327.89	275.85	386.91		456.56	421.05		419.17	473.42	462.18	394.36
9/4/06 10:45	24.82	327.90	275.85	386.91		456.56	421.05		419.17	473.42	462.18	394.36
9/4/06 11:00	24.82	327.90	275.85	386.91		456.56	421.05		419.17	473.42	462.19	394.36
9/4/06 11:15	24.82	327.90	275.85	386.91		456.56	421.05		419.17	473.42	462.18	394.35
9/4/06 11:30	24.81	327.90	275.85	386.91		456.56	421.05		419.17	473.42	462.18	394.35
9/4/06 11:45	24.81	327.89	275.85	386.91		456.56	421.05		419.17	473.42	462.17	394.34
9/4/06 12:00	24.80	327.90	275.84	386.91		456.56	421.05		419.16	473.42	462.17	394.35
9/4/06 12:15	24.80	327.90	275.85	386.90		456.56	421.05		419.17	473.42	462.17	394.35
9/4/06 12:30	24.79	327.89	275.84	386.90		456.55	421.04		419.16	473.42	462.17	394.35
9/4/06 12:45	24.79	327.89	275.84	386.90		456.55	421.04		419.16	473.42	462.17	394.34
9/4/06 13:00	24.79	327.89	275.82	386.89		456.55	421.04		419.16	473.42	462.17	394.34
9/4/06 13:15	24.78	327.89	275.83	386.88		456.54	421.04		419.16	473.42	462.17	394.33
9/4/06 13:30	24.78	327.88	275.82	386.89		456.54	421.03		419.15	473.41	462.17	394.33
9/4/06 13:45	24.77	327.87	275.82	386.87		456.54	421.03		419.15	473.41	462.15	394.33
9/4/06 14:00	24.78	327.87	275.82	386.88		456.54	421.03		419.15	473.41	462.15	394.33
9/4/06 14:15	24.77	327.87	275.81	386.87		456.53	421.02		419.14	473.41	462.14	394.32
9/4/06 14:30	24.77	327.87	275.81	386.87		456.53	421.02		419.14	473.41	462.14	394.32
9/4/06 14:45	24.76	327.86	275.80	386.86		456.52	421.01		419.14	473.40	462.14	394.32
9/4/06 15:00	24.76	327.86	275.80	386.86		456.52	421.01		419.13	473.40	462.14	394.31
9/4/06 15:15	24.76	327.85	275.79	386.85		456.52	421.01		419.13	473.40	462.14	394.31
9/4/06 15:30	24.76	327.85	275.79	386.85		456.51	421.00		419.13	473.40	462.13	394.30
9/4/06 15:45	24.76	327.84	275.79	386.84		456.51	421.00		419.12	473.39	462.13	394.30
9/4/06 16:00	24.76	327.85	275.79	386.84		456.50	421.00		419.12	473.39	462.12	394.30
9/4/06 16:15	24.76	327.84	275.78	386.84		456.50	420.99		419.12	473.39	462.12	394.28
9/4/06 16:30	24.76	327.84	275.78	386.83		456.50	420.99		419.11	473.39	462.12	394.29
9/4/06 16:45	24.76	327.84	275.78	386.83		456.50	420.99		419.11	473.38	462.12	394.28
9/4/06 17:00	24.76	327.84	275.77	386.83		456.49	420.99		419.11	473.38	462.12	394.28
9/4/06 17:15	24.76	327.83	275.77	386.82		456.49	420.99		419.11	473.38	462.12	394.28
9/4/06 17:30	24.76	327.83	275.77	386.82		456.49	420.98		419.11	473.38	462.12	394.28
9/4/06 17:45	24.76	327.83	275.77	386.82		456.49	420.98		419.10	473.38	462.11	394.28
9/4/06 18:00	24.77	327.83	275.77	386.82		456.49	420.98		419.10	473.37	462.11	394.28
9/4/06 18:15	24.77	327.83	275.77	386.82		456.49	420.98		419.11	473.38	462.12	394.28
9/4/06 18:30	24.77	327.83	275.77	386.81		456.49	420.98		419.10	473.37	462.12	394.28
9/4/06 18:45	24.78	327.83	275.77	386.82		456.49	420.98		419.10	473.37	462.12	394.28
9/4/06 19:00	24.78	327.83	275.77	386.81		456.49	420.98		419.10	473.37	462.11	394.28
9/4/06 19:15	24.79	327.83	275.77	386.82		456.49	420.98		419.10	473.37	462.10	394.28
9/4/06 19:30	24.80	327.83	275.77	386.81		456.49	420.98		419.11	473.37	462.12	394.28
9/4/06 19:45	24.81	327.83	275.78	386.82		456.49	420.98		419.11	473.37	462.12	394.29

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
9/4/06 20:00	24.82	327.83	275.78	386.82		456.50	420.98		419.11	473.37	462.11	394.29
9/4/06 20:15	24.83	327.83	275.78	386.82		456.50	420.99		419.11	473.37	462.12	394.29
9/4/06 20:30	24.83	327.84	275.79	386.83		456.50	420.99		419.11	473.37	462.12	394.30
9/4/06 20:45	24.84	327.84	275.79	386.83		456.50	420.99		419.12	473.36	462.12	394.30
9/4/06 21:00	24.85	327.85	275.79	386.84		456.51	421.00		419.12	473.36	462.12	394.31
9/4/06 21:15	24.85	327.85	275.79	386.84		456.51	421.00		419.12	473.36	462.12	394.31
9/4/06 21:30	24.85	327.85	275.80	386.84		456.51	421.00		419.13	473.36	462.13	394.31
9/4/06 21:45	24.86	327.85	275.80	386.84		456.51	421.00		419.13	473.36	462.13	394.31
9/4/06 22:00	24.86	327.85	275.80	386.84		456.52	421.00		419.13	473.36	462.14	394.32
9/4/06 22:15	24.86	327.85	275.80	386.84		456.52	421.01		419.13	473.37	462.14	394.32
9/4/06 22:30	24.86	327.85	275.80	386.84		456.52	421.01		419.13	473.37	462.14	394.32
9/4/06 22:45	24.86	327.85	275.80	386.84		456.52	421.01		419.13	473.37	462.13	394.32
9/4/06 23:00	24.86	327.85	275.80	386.85		456.52	421.01		419.13	473.37	462.14	394.32
9/4/06 23:15	24.86	327.85	275.80	386.85		456.52	421.01		419.13	473.37	462.14	394.32
9/4/06 23:30	24.86	327.85	275.80	386.85		456.52	421.01		419.13	473.37	462.13	394.32
9/4/06 23:45	24.86	327.85	275.80	386.85		456.52	421.01		419.13	473.37	462.13	394.32
9/5/06 0:00	24.87	327.85	275.81	386.84		456.52	421.01		419.13	473.37	462.14	394.31
9/5/06 0:15	24.86	327.85	275.80	386.84		456.52	421.01		419.13	473.37	462.13	394.31
9/5/06 0:30	24.86	327.85	275.80	386.84		456.52	421.01		419.13	473.37	462.13	394.31
9/5/06 0:45	24.86	327.85	275.80	386.84		456.51	421.01		419.13	473.37	462.12	394.30
9/5/06 1:00	24.87	327.85	275.80	386.84		456.51	421.00		419.13	473.37	462.14	394.31
9/5/06 1:15	24.86	327.85	275.80	386.84		456.51	421.00		419.13	473.37	462.13	394.31
9/5/06 1:30	24.87	327.85	275.79	386.84		456.51	421.00		419.13	473.37	462.12	394.31
9/5/06 1:45	24.86	327.85	275.79	386.84		456.51	421.00		419.12	473.37	462.12	394.31
9/5/06 2:00	24.86	327.85	275.80	386.84		456.51	421.00		419.13	473.37	462.12	394.31
9/5/06 2:15	24.86	327.84	275.79	386.84		456.50	421.00		419.12	473.37	462.12	394.30
9/5/06 2:30	24.86	327.84	275.79	386.83		456.50	420.99		419.12	473.37	462.12	394.30
9/5/06 2:45	24.86	327.83	275.79	386.83		456.50	420.99		419.11	473.37	462.12	394.29
9/5/06 3:00	24.86	327.84	275.79	386.83		456.50	420.99		419.12	473.36	462.12	394.29
9/5/06 3:15	24.86	327.83	275.78	386.82		456.50	420.99		419.12	473.37	462.12	394.29
9/5/06 3:30	24.86	327.83	275.78	386.82		456.49	420.99		419.11	473.36	462.12	394.28
9/5/06 3:45	24.86	327.83	275.78	386.82		456.49	420.99		419.11	473.36	462.12	394.28
9/5/06 4:00	24.86	327.83	275.78	386.82		456.49	420.98		419.11	473.36	462.11	394.27
9/5/06 4:15	24.86	327.83	275.78	386.82		456.49	420.98		419.11	473.36	462.11	394.26
9/5/06 4:30	24.86	327.83	275.78	386.82		456.49	420.98		419.11	473.36	462.11	394.27
9/5/06 4:45	24.86	327.83	275.78	386.82		456.49	420.98		419.11	473.36	462.11	394.25
9/5/06 5:00	24.86	327.83	275.78	386.82		456.49	420.98		419.11	473.36	462.11	394.25
9/5/06 5:15	24.86	327.83	275.78	386.82		456.49	420.98		419.11	473.36	462.11	394.25
9/5/06 5:30	24.86	327.83	275.78	386.82		456.49	420.98		419.11	473.37	462.11	394.26
9/5/06 5:45	24.86	327.83	275.78	386.82		456.49	420.98		419.11	473.37	462.11	394.26
9/5/06 6:00	24.85	327.83	275.78	386.82		456.49	420.99		419.11	473.37	462.11	394.27
9/5/06 6:15	24.86	327.83	275.79	386.82		456.49	420.99		419.11	473.37	462.11	394.26
9/5/06 6:30	24.86	327.83	275.79	386.83		456.50	420.99		419.12	473.37	462.12	394.27
9/5/06 6:45	24.86	327.83	275.79	386.84		456.50	420.99		419.12	473.37	462.12	394.26
9/5/06 7:00	24.86	327.84	275.79	386.84		456.50	421.00		419.12	473.37	462.12	394.28
9/5/06 7:15	24.87	327.84	275.80	386.84		456.51	421.00		419.13	473.37	462.12	394.30
9/5/06 7:30	24.86	327.85	275.81	386.85		456.51	421.00		419.13	473.37	462.13	394.31
9/5/06 7:45	24.86	327.85	275.81	386.86		456.52	421.01		419.14	473.37	462.14	394.31
9/5/06 8:00	24.86	327.86	275.81	386.86		456.52	421.01		419.14	473.38	462.14	394.31
9/5/06 8:15	24.85	327.86	275.82	386.87		456.53	421.02		419.14	473.38	462.14	394.31
9/5/06 8:30	24.84	327.87	275.82	386.87		456.53	421.02		419.15	473.38	462.15	394.32
9/5/06 8:45	24.84	327.87	275.82	386.88		456.53	421.02		419.15	473.39	462.15	394.32
9/5/06 9:00	24.83	327.87	275.82	386.88		456.54	421.03		419.15	473.39	462.16	394.33
9/5/06 9:15	24.82	327.87	275.83	386.88		456.54	421.03		419.16	473.39	462.16	394.33
9/5/06 9:30	24.82	327.88	275.83	386.89		456.54	421.03		419.16	473.40	462.17	394.33
9/5/06 9:45	24.81	327.88	275.83	386.89		456.55	421.04		419.17	473.40	462.17	394.33
9/5/06 10:00	24.81	327.88	275.85	386.89		456.55	421.04		419.17	473.40	462.17	394.33
9/5/06 10:15	24.81	327.88	275.84	386.90		456.55	421.04		419.17	473.40	462.17	394.33
9/5/06 10:30	24.80	327.89	275.84	386.90		456.55	421.05		419.17	473.41	462.17	394.33
9/5/06 10:45	24.79	327.89	275.84	386.90		456.56	421.05		419.18	473.41	462.17	394.33
9/5/06 11:00	24.78	327.89	275.84	386.90		456.56	421.05		419.17	473.41	462.17	394.34
9/5/06 11:15	24.78	327.89	275.84	386.90		456.56	421.05		419.17	473.42	462.17	394.33
9/5/06 11:30	24.78	327.89	275.84	386.90		456.56	421.05		419.18	473.42	462.17	394.33
9/5/06 11:45	24.77	327.89	275.83	386.89		456.56	421.05		419.17	473.42	462.17	394.33
9/5/06 12:00	24.76	327.88	275.84	386.89		456.55	421.05		419.18	473.42	462.17	394.33
9/5/06 12:15	24.75	327.88	275.83	386.88		456.55	421.05		419.17	473.43	462.17	394.33
9/5/06 12:30	24.76	327.87	275.83	386.88		456.55	421.05		419.17	473.43	462.17	394.33
9/5/06 12:45	24.74	327.88	275.83	386.88		456.55	421.04		419.17	473.43	462.16	394.33
9/5/06 13:00	24.74	327.87	275.83	386.88		456.55	421.04		419.16	473.43	462.16	394.33
9/5/06 13:15	24.73	327.87	275.83	386.88		456.54	421.04		419.16	473.43	462.16	394.33
9/5/06 13:30	24.74	327.87	275.82	386.88		456.54	421.03		419.16	473.43	462.15	394.32
9/5/06 13:45	24.74	327.87	275.80	386.87		456.54	421.03		419.16	473.42	462.15	394.32
9/5/06 14:00	24.73	327.87	275.82	386.86		456.53	421.03		419.15	473.42	462.14	394.32
9/5/06 14:15	24.72	327.86	275.81	386.86		456.53	421.02		419.15	473.42	462.14	394.31
9/5/06 14:30	24.72	327.86	275.81	386.85		456.52	421.02		419.15	473.42	462.14	394.31
9/5/06 14:45	24.72	327.85	275.81	386.85		456.52	421.01		419.14	473.42	462.13	394.29
9/5/06 15:00	24.71	327.85	275.80	386.84		456.51	421.01		419.13	473.42	462.12	394.29
9/5/06 15:15	24.71	327.84	275.79	386.84		456.51	421.00		419.14	473.42	462.12	394.28
9/5/06 15:30	24.70	327.83	275.79	386.83		456.50	421.00		419.13	473.42	462.11	394.28
9/5/06 15:45	24.70	327.83	275.78	386.82		456.50	420.99		419.11	473.42	462.11	394.28
9/5/06 16:00	24.70	327.82	275.77	386.81		456.49	420.99		419.11	473.42	462.10	394.28
9/5/06 16:15	24.70	327.82	275.76	386.81		456.49	420.98		419.11	473.41	462.09	394.28
9/5/06 16:30	24.70	327.82	275.76	386.80		456.48	420.98		419.11	473.41	462.09	394.27
9/5/06 16:45	24.71	327.81	275.76	386.80		456.48	420.98		419.10	473.40	462.09	394.26
9/5/06 17:00	24.71	327.81	275.76	386.79		456.48	420.97		419.11	473.40	462.09	394.26
9/5/06 17:15	24.72	327.80	275.76	386.80		456.48	420.97		419.10	473.40	462.08	394.26
9/5/06 17:30	24.72	327.80	275.75	386.79		456.47	420.97		419.10	473.40	462.08	394.26
9/5/06 17:45	24.72	327.80	275.75	386.79		456.47	420.97		419.09	473.39	462.09	394.25
9/5/06 18:00	24.73	327.80	275.75	386.79		456.47	420.96		419.09	473.39	462.08	394.25
9/5/06 18:15	24.73	327.80	275.75	386.79		456.47	420.96		419.10	473.39	462.08	394.25
9/5/06 18:30	24.73	327.79	275.75	386.79		456.47	420.96		419.09	473.39	462.07	394.25
9/5/06 18:45	24.74	327.80	275.75	386.79		456.46	420.96		419.09	473.39	462.07	394.25
9/5/06 19:00	24.74	327.80	275.74	386.78		456.47	420.96		419.09	473.39	462.08	394.25
9/5/06 19:15	24.75	327.80	275.75	386.78		456.47	420.96		419.09	473.39	462.08	394.26
9/5/06 19:30	24.75	327.80	275.74	386.78		456.47	420.96		419.09	473.38	462.07	394.24
9/5/06 19:45	24.76	327.80	275.75	386.78		456.47	420.96		419.09	473.38	462.07	394.25
9/5/06 20:00	24.77	327.80	275.75	386.79		456.47	420.97		419.10	473.38	462.09	394.26
9/5/06 20:15	24.78	327.80	275.76	386.79		456.48	420.97		419.10	473.38	462.09	394.27
9/5/06 20:30	24.80	327.80	275.76	386.79		456.48	420.97		419.10	473.38	462.09	394.27
9/5/06 20:45	24.80	327.81	275.76	386.80		456.48	420.97		419.11	473.38	462.09	394.26

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
9/5/06 21:00	24.80	327.81	275.77	386.80		456.48	420.98		419.11	473.38	462.09	394.27
9/5/06 21:15	24.81	327.82	275.77	386.81		456.49	420.98		419.11	473.38	462.09	394.28
9/5/06 21:30	24.81	327.82	275.77	386.81		456.49	420.98		419.11	473.38	462.09	394.28
9/5/06 21:45	24.81	327.82	275.77	386.81		456.49	420.98		419.11	473.38	462.09	394.28
9/5/06 22:00	24.81	327.82	275.77	386.82		456.49	420.99		419.11	473.38	462.09	394.28
9/5/06 22:15	24.82	327.82	275.78	386.81		456.50	420.99		419.12	473.39	462.10	394.28
9/5/06 22:30	24.81	327.82	275.78	386.82		456.49	420.99		419.12	473.39	462.10	394.28
9/5/06 22:45	24.81	327.83	275.78	386.82		456.50	420.99		419.12	473.39	462.11	394.28
9/5/06 23:00	24.81	327.82	275.78	386.82		456.50	420.99		419.12	473.40	462.10	394.28
9/5/06 23:15	24.81	327.83	275.78	386.82		456.50	420.99		419.12	473.40	462.10	394.28
9/5/06 23:30	24.81	327.83	275.78	386.82		456.50	420.99		419.12	473.40	462.10	394.28
9/5/06 23:45	24.81	327.83	275.78	386.82		456.50	420.99		419.12	473.40	462.10	394.28
9/6/06 0:00	24.81	327.83	275.78	386.82		456.50	420.99		419.12	473.40	462.10	394.28
9/6/06 0:15	24.81	327.83	275.78	386.82		456.50	420.99		419.12	473.40	462.10	394.28
9/6/06 0:30	24.81	327.83	275.78	386.82		456.50	420.99		419.12	473.40	462.10	394.28
9/6/06 0:45	24.81	327.82	275.78	386.82		456.50	420.99		419.12	473.40	462.10	394.28
9/6/06 1:00	24.80	327.82	275.77	386.82		456.49	420.99		419.12	473.40	462.10	394.28
9/6/06 1:15	24.80	327.82	275.77	386.81		456.49	420.99		419.12	473.40	462.09	394.28
9/6/06 1:30	24.81	327.82	275.78	386.81		456.49	420.99		419.12	473.40	462.09	394.28
9/6/06 1:45	24.80	327.81	275.78	386.81		456.49	420.99		419.11	473.40	462.09	394.28
9/6/06 2:00	24.80	327.81	275.78	386.81		456.49	420.98		419.11	473.40	462.09	394.28
9/6/06 2:15	24.80	327.81	275.77	386.81		456.48	420.98		419.11	473.40	462.09	394.27
9/6/06 2:30	24.80	327.81	275.77	386.80		456.48	420.98		419.11	473.40	462.09	394.27
9/6/06 2:45	24.80	327.81	275.77	386.80		456.48	420.98		419.11	473.40	462.08	394.26
9/6/06 3:00	24.80	327.80	275.77	386.80		456.48	420.97		419.10	473.40	462.08	394.26
9/6/06 3:15	24.79	327.80	275.76	386.80		456.47	420.97		419.10	473.40	462.07	394.26
9/6/06 3:30	24.79	327.80	275.76	386.80		456.47	420.97		419.10	473.39	462.07	394.26
9/6/06 3:45	24.79	327.80	275.76	386.79		456.47	420.97		419.10	473.39	462.07	394.25
9/6/06 4:00	24.79	327.79	275.76	386.79		456.46	420.96		419.10	473.39	462.07	394.25
9/6/06 4:15	24.79	327.79	275.75	386.79		456.46	420.96		419.09	473.39	462.07	394.25
9/6/06 4:30	24.79	327.79	275.75	386.79		456.46	420.96		419.09	473.39	462.07	394.25
9/6/06 4:45	24.78	327.79	275.75	386.79		456.46	420.96		419.09	473.39	462.07	394.24
9/6/06 5:00	24.78	327.78	275.74	386.79		456.46	420.96		419.09	473.39	462.07	394.24
9/6/06 5:15	24.78	327.78	275.74	386.78		456.46	420.96		419.09	473.39	462.07	394.24
9/6/06 5:30	24.78	327.79	275.74	386.79		456.46	420.95		419.09	473.39	462.07	394.24
9/6/06 5:45	24.78	327.79	275.74	386.78		456.46	420.95		419.08	473.39	462.07	394.24
9/6/06 6:00	24.78	327.78	275.74	386.78		456.46	420.96		419.09	473.39	462.07	394.24
9/6/06 6:15	24.78	327.78	275.75	386.78		456.46	420.95		419.09	473.39	462.07	394.24
9/6/06 6:30	24.78	327.79	275.74	386.78		456.46	420.96		419.09	473.39	462.07	394.24
9/6/06 6:45	24.78	327.79	275.74	386.78		456.46	420.96		419.09	473.39	462.07	394.24
9/6/06 7:00	24.78	327.79	275.75	386.79		456.46	420.96		419.09	473.39	462.07	394.25
9/6/06 7:15	24.79	327.80	275.76	386.79		456.47	420.96		419.10	473.39	462.08	394.25
9/6/06 7:30	24.78	327.80	275.75	386.80		456.47	420.97		419.10	473.39	462.08	394.25
9/6/06 7:45	24.79	327.80	275.76	386.80		456.48	420.97		419.10	473.39	462.09	394.25
9/6/06 8:00	24.78	327.80	275.77	386.80		456.48	420.97		419.11	473.39	462.09	394.25
9/6/06 8:15	24.78	327.80	275.77	386.80		456.48	420.98		419.11	473.40	462.09	394.26
9/6/06 8:30	24.78	327.81	275.77	386.81		456.49	420.98		419.11	473.40	462.09	394.27
9/6/06 8:45	24.77	327.81	275.77	386.81		456.49	420.98		419.12	473.41	462.10	394.27
9/6/06 9:00	24.77	327.82	275.78	386.82		456.49	420.99		419.12	473.41	462.10	394.28
9/6/06 9:15	24.77	327.82	275.79	386.82		456.50	420.99		419.13	473.41	462.12	394.28
9/6/06 9:30	24.76	327.83	275.79	386.83		456.50	421.00		419.13	473.41	462.11	394.28
9/6/06 9:45	24.76	327.83	275.79	386.83		456.51	421.00		419.13	473.41	462.12	394.28
9/6/06 10:00	24.76	327.83	275.81	386.84		456.51	421.01		419.14	473.42	462.12	394.28
9/6/06 10:15	24.75	327.83	275.81	386.84		456.52	421.01		419.15	473.42	462.12	394.28
9/6/06 10:30	24.75	327.84	275.81	386.84		456.52	421.02		419.15	473.42	462.12	394.29
9/6/06 10:45	24.75	327.84	275.79	386.84		456.52	421.02		419.15	473.42	462.12	394.29
9/6/06 11:00	24.74	327.85	275.80	386.84		456.53	421.02		419.15	473.43	462.14	394.30
9/6/06 11:15	24.74	327.85	275.81	386.85		456.53	421.02		419.15	473.43	462.13	394.30
9/6/06 11:30	24.73	327.85	275.81	386.84		456.53	421.02		419.15	473.44	462.14	394.30
9/6/06 11:45	24.73	327.85	275.81	386.84		456.53	421.03		419.15	473.44	462.14	394.30
9/6/06 12:00	24.71	327.85	275.81	386.85		456.53	421.03		419.16	473.45	462.13	394.30
9/6/06 12:15			275.81	386.85		456.53	421.03		419.15	473.45	462.13	394.30
9/6/06 12:30	24.70	327.85	275.81	386.84		456.53	421.02		419.15	473.45	462.13	394.29
9/6/06 12:45	24.70	327.84	275.79	386.84		456.52	421.02		419.15	473.46	462.09	394.29
9/6/06 13:00	24.70	327.84	275.79	386.83		456.52	421.02					394.28
9/6/06 13:15	24.69	327.84	275.79	386.84		456.52	421.02		419.15	473.46	462.09	394.28
9/6/06 13:30	24.68	327.83	275.79	386.83		456.51	421.01		419.13	473.46	462.08	
9/6/06 13:45	24.67	327.83	275.79	386.82		456.51	421.01		419.13	473.46	462.08	
9/6/06 14:00	24.66	327.83	275.80			456.51	421.01		419.13	473.46	462.07	394.28
9/6/06 14:15	24.66	327.83	275.79			456.51	421.00		419.12	473.46	462.07	394.28
9/6/06 14:30	24.65	327.82	275.79			456.50	421.00		419.12	473.46	462.06	394.28
9/6/06 14:45	24.65	327.81	275.77			456.49	420.99		419.12	473.46	462.06	394.27
9/6/06 15:00	24.64	327.81	275.77			456.49	420.99		419.11	473.46	462.06	394.26
9/6/06 15:15	24.64	327.80	275.77			456.48	420.98		419.11	473.46	462.05	394.25
9/6/06 15:30	24.64	327.80	275.76			456.48	420.98		419.10	473.45	462.05	394.25
9/6/06 15:45	24.64	327.80	275.75			456.47	420.97		419.08	473.45	462.04	394.24
9/6/06 16:00	24.63	327.79	275.75			456.47	420.97		419.08	473.45	462.04	394.24
9/6/06 16:15	24.63	327.79	275.74			456.47	420.96		419.10	473.45	462.03	394.24
9/6/06 16:30	24.63	327.78	275.74	386.82					419.09	473.45	462.03	394.23
9/6/06 16:45	24.63	327.78		386.82		456.47	420.96		419.08	473.45	462.02	394.23
9/6/06 17:00	24.63	327.77	275.75	386.82		456.47	420.95		419.07	473.44	462.01	394.23
9/6/06 17:15	24.63	327.76	275.74	386.80		456.46	420.95		419.07	473.44	462.01	394.22
9/6/06 17:30	24.63	327.76	275.73	386.80		456.46	420.94		419.06	473.44	462.01	394.22
9/6/06 17:45	24.63	327.76	275.73	386.80		456.45	420.94		419.06	473.44	462.00	394.21
9/6/06 18:00	24.64	327.75	275.73	386.80	619.05	456.45	420.94		419.06	473.44	462.00	394.20
9/6/06 18:15	24.64	327.75	275.73	386.79	619.06	456.45	420.93		419.06	473.44	461.99	394.20
9/6/06 18:30	24.64	327.75	275.73	386.80	619.06	456.44	420.93		419.06	473.44	461.99	394.20
9/6/06 18:45	24.64	327.75	275.72	386.79	619.06	456.44	420.93		419.05	473.44	462.00	394.20
9/6/06 19:00	24.65	327.74	275.72	386.77	619.06	456.44	420.93		419.05	473.43	461.98	394.20
9/6/06 19:15	24.65	327.74	275.72	386.77	619.06	456.44	420.93		419.05	473.43	461.98	394.19
9/6/06 19:30	24.66	327.74	275.72	386.79	619.06	456.44	420.93		419.05	473.43	461.98	394.19
9/6/06 19:45	24.67	327.74	275.72	386.79	619.06	456.44	420.93		419.05	473.43	461.99	394.20
9/6/06 20:00	24.67	327.74	275.72	386.79	619.06	456.44	420.93		419.05	473.43	461.99	394.20
9/6/06 20:15	24.68	327.75	275.72	386.79	619.07	456.44	420.93		419.05	473.43	461.99	394.20
9/6/06 20:30	24.68	327.75	275.73	386.79	619.07	456.45	420.93		419.06	473.43	461.99	394.20
9/6/06 20:45	24.69	327.75	275.73	386.79	619.07	456.45	420.93		419.06	473.43	462.00	394.21
9/6/06 21:00	24.70	327.75	275.73	386.79	619.07	456.45	420.94		419.06	473.43	462.00	394.20
9/6/06 21:15	24.70	327.76	275.73	386.79	619.07	456.46	420.94		419.07	473.43	462.01	394.21
9/6/06 21:30	24.70	327.76	275.74	386.79	619.08	456.46	420.94		419.07	473.44	462.01	394.21
9/6/06 21:45	24.70	327.76	275.74	386.79	619.08	456.46	420.95		419.07	473.44	462.01	394.21

Power Resources, Inc.
Regional Southwest Area Aquifer Tests
Appendix D-1 - 15-minute Depth to Water Data (All Monitoring Wells)

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
9/6/06 22:00	24.70	327.76	275.74	386.80	619.08	456.46	420.95		419.07	473.44	462.01	394.22
9/6/06 22:15	24.70	327.76	275.75	386.80	619.08	456.46	420.95		419.07	473.45	462.01	394.22
9/6/06 22:30	24.70	327.76	275.75	386.80	619.08	456.46	420.95		419.08	473.45	462.01	394.22
9/6/06 22:45	24.70	327.76	275.75	386.80	619.09	456.47	420.95		419.08	473.46	462.01	394.23
9/6/06 23:00	24.70	327.77	275.75	386.80	619.09	456.47	420.95		419.08	473.46	462.01	394.23
9/6/06 23:15	24.70	327.76	275.75	386.80	619.08	456.47	420.95		419.07	473.47	462.01	394.22
9/6/06 23:30	24.70	327.77	275.75	386.80	619.09	456.47	420.95		419.08	473.47	462.01	394.22
9/6/06 23:45	24.69	327.77	275.75	386.80	619.09	456.47	420.96		419.08	473.47	462.01	394.23
9/7/06 0:00	24.70	327.77	275.75	386.80	619.09	456.47	420.96		419.08	473.47	462.01	394.23
9/7/06 0:15	24.70	327.77	275.75	386.80	619.09	456.47	420.96		419.08	473.47	462.01	394.22
9/7/06 0:30	24.70	327.77	275.75	386.80	619.09	456.47	420.96		419.08	473.47	462.02	394.23
9/7/06 0:45	24.69	327.77	275.75	386.80	619.08	456.47	420.96		419.08	473.47	462.02	394.23
9/7/06 1:00	24.69	327.77	275.75	386.80	619.08	456.47	420.96		419.08	473.47	462.02	394.23
9/7/06 1:15	24.69	327.77	275.75	386.80	619.09	456.47	420.96		419.08	473.47	462.02	394.22
9/7/06 1:30	24.69	327.77	275.75	386.80	619.08	456.47	420.96		419.08	473.47	462.01	394.23
9/7/06 1:45	24.68	327.77	275.75	386.80	619.08	456.46	420.95		419.08	473.47	462.01	394.23
9/7/06 2:00	24.68	327.76	275.75	386.79	619.08	456.46	420.95		419.07	473.47	462.01	394.22
9/7/06 2:15	24.69	327.76	275.74	386.80	619.08	456.46	420.95		419.07	473.47	462.01	394.22
9/7/06 2:30	24.68	327.76	275.74	386.79	619.07	456.46	420.95		419.07	473.47	462.01	394.22
9/7/06 2:45	24.68	327.76	275.74	386.79	619.07	456.46	420.94		419.07	473.47	462.01	394.21
9/7/06 3:00	24.68	327.75	275.73	386.79	619.07	456.45	420.94		419.06	473.47	462.00	394.21
9/7/06 3:15	24.69	327.75	275.73	386.79	619.07	456.45	420.94		419.07	473.46	462.00	394.21
9/7/06 3:30	24.68	327.75	275.73	386.79	619.06	456.45	420.94		419.06	473.46	461.99	394.20
9/7/06 3:45	24.69	327.74	275.73	386.79	619.06	456.45	420.94		419.06	473.46	461.99	394.20
9/7/06 4:00	24.68	327.74	275.73	386.77	619.06	456.44	420.93		419.06	473.45	461.99	394.20
9/7/06 4:15	24.68	327.74	275.73	386.79	619.05	456.44	420.93		419.05	473.45	461.99	394.20
9/7/06 4:30	24.68	327.74	275.72	386.77	619.05	456.44	420.93		419.05	473.45	461.99	394.20
9/7/06 4:45	24.68	327.73	275.72	386.77	619.05	456.43	420.92		419.05	473.45	461.98	394.19
9/7/06 5:00	24.67	327.73	275.72	386.77	619.05	456.43	420.92		419.05	473.45	461.98	394.19
9/7/06 5:15	24.67	327.73	275.71	386.77	619.05	456.43	420.92		419.04	473.45	461.98	394.19
9/7/06 5:30	24.67	327.73	275.71	386.75	619.04	456.43	420.92		419.04	473.45	461.97	394.19
9/7/06 5:45	24.67	327.73	275.71	386.75	619.04	456.43	420.91		419.04	473.44	461.97	394.18
9/7/06 6:00	24.67	327.73	275.71	386.75	619.04	456.42	420.91		419.04	473.44	461.97	394.18
9/7/06 6:15	24.67	327.72	275.71	386.75	619.04	456.42	420.91		419.04	473.44	461.97	394.18
9/7/06 6:30	24.67	327.72	275.71	386.75	619.04	456.43	420.91		419.04	473.44	461.97	394.18
9/7/06 6:45	24.67	327.73	275.71	386.75	619.04	456.43	420.92		419.04	473.44	461.97	394.18
9/7/06 7:00	24.67	327.73	275.71	386.75	619.04	456.43	420.92		419.04	473.43	461.97	394.18
9/7/06 7:15	24.68	327.73	275.72	386.77	619.05	456.43	420.92		419.04	473.43	461.98	394.19
9/7/06 7:30	24.68	327.74	275.72	386.75	619.05	456.44	420.92		419.05	473.43	461.98	394.19
9/7/06 7:45	24.68	327.74	275.72	386.77	619.05	456.44	420.92		419.05	473.43	461.98	394.19
9/7/06 8:00	24.68	327.74	275.72	386.77	619.05	456.44	420.93		419.05	473.43	461.99	394.19
9/7/06 8:15	24.67	327.74	275.73	386.77	619.06	456.45	420.93		419.06	473.44	461.99	394.20
9/7/06 8:30	24.67	327.74	275.73	386.77	619.06	456.46	420.93		419.06	473.44	462.00	394.19
9/7/06 8:45	24.67	327.75	275.73	386.77	619.07	456.48	420.94		419.06	473.44	462.00	394.19
9/7/06 9:00	24.67	327.75	275.74	386.79	619.06	456.48	420.94		419.06	473.44	462.00	394.20
9/7/06 9:15	24.67	327.75	275.74	386.77	619.07	456.46	420.93		419.07	473.45	462.01	394.20
9/7/06 9:30	24.67	327.76	275.74	386.79	619.07	456.48	420.91		419.07	473.45	462.01	394.20
9/7/06 9:45	24.67	327.76	275.75	386.79	619.08	456.50	420.91		419.08	473.45	462.01	394.21
9/7/06 10:00	24.66	327.77	275.75	386.79	619.08	456.51	420.90		419.08	473.46	462.02	394.22
9/7/06 10:15	24.67	327.77	275.75	386.80	619.09	456.52	420.90		419.08	473.46	462.03	394.22
9/7/06 10:30	24.66	327.78	275.76	386.80	619.09	456.52	420.90		419.09	473.46	462.04	394.23
9/7/06 10:45	24.66	327.78	275.76	386.80	619.09	456.49	420.90		419.09	473.46	462.04	394.23
9/7/06 11:00	24.67	327.78	275.77	386.80	619.10	456.50	420.91		419.10	473.46	462.03	394.24
9/7/06 11:15	24.66	327.78	275.77	386.80	619.10	456.50	420.91		419.11	473.47	462.03	394.24
9/7/06 11:30	24.66	327.79	275.78	386.80	619.10	456.56	420.91		419.10	473.47	462.04	394.24
9/7/06 11:45	24.65	327.79	275.78	386.80	619.11	456.56	420.92		419.10	473.48	462.04	394.24
9/7/06 12:00	24.64	327.79	275.78	386.82	619.11	456.60	420.92		419.10	473.48	462.05	394.24
9/7/06 12:15	24.64	327.79	275.77	386.80	619.11	456.54	420.91		419.11	473.48	462.04	394.24
9/7/06 12:30	24.63	327.79	275.77	386.80	619.11	456.55	420.91		419.10	473.49	462.04	394.24
9/7/06 12:45	24.63	327.79	275.77	386.80	619.11	456.53	420.92		419.11	473.49	462.04	394.24
9/7/06 13:00	24.62	327.79	275.79	386.82	619.11	456.54	420.92		419.10	473.49	462.04	394.24
9/7/06 13:15	24.62	327.79	275.78	386.80	619.11	456.44	420.91		419.11	473.50	462.04	394.24
9/7/06 13:30	24.61	327.78	275.77	386.80	619.11	456.44	420.91		419.11	473.50	462.04	394.24
9/7/06 13:45	24.61	327.78	275.76	386.80	619.10	456.44	420.91		419.09	473.50	462.04	394.24
9/7/06 14:00	24.60	327.78	275.76	386.80	619.10	456.44	420.91		419.10	473.50	462.04	394.23
9/7/06 14:15	24.60	327.78	275.77	386.80	619.09	456.43	420.90		419.11	473.50	462.03	394.23
9/7/06 14:30	24.60	327.78	275.76	386.80	619.09	456.43	420.90		419.10	473.50	462.02	394.23
9/7/06 14:45	24.60	327.77	275.75	386.80	619.09	456.43	420.90		419.09	473.50	462.02	394.22
9/7/06 15:00	24.59	327.77	275.75	386.79	619.08	456.42	420.89		419.09	473.50	462.01	394.22
9/7/06 15:15	24.59	327.76	275.74	386.79	619.07	456.42	420.89		419.08	473.50	462.01	394.21
9/7/06 15:30	24.58	327.76	275.74	386.79	619.07	456.41	420.88		419.08	473.50	462.01	394.21
9/7/06 15:45	24.58	327.75	275.74	386.79	619.07	456.40	420.88		419.07	473.50	462.00	394.20
9/7/06 16:00	24.57	327.75	275.73	386.79	619.06	456.40	420.87		419.06	473.50	462.00	394.20
9/7/06 16:15	24.56	327.74	275.73	386.79	619.06	456.39	420.87		419.06	473.50	461.99	394.20
9/7/06 16:30	24.56	327.74	275.72	386.79	619.05	456.39	420.86		419.06	473.50	461.99	394.19
9/7/06 16:45	24.56	327.74	275.72	386.79	619.05	456.38	420.86		419.05	473.49	461.98	394.19
9/7/06 17:00	24.57	327.73	275.71	386.79	619.04	456.38	420.85		419.05	473.49	461.98	394.19
9/7/06 17:15	24.57	327.73	275.71	386.79	619.04	456.38	420.85		419.05	473.49	461.98	394.18
9/7/06 17:30	24.57	327.72	275.71	386.79	619.04	456.37	420.85		419.04	473.48	461.97	394.17
9/7/06 17:45	24.57	327.72	275.71	386.79	619.04	456.37	420.84		419.04	473.48	461.97	394.18
9/7/06 18:00	24.57	327.71	275.70	386.77	619.03	456.36	420.84		419.03	473.48	461.96	394.17
9/7/06 18:15	24.58	327.71	275.70	386.79	619.03	456.36	420.84		419.03	473.48	461.96	394.17
9/7/06 18:30	24.58	327.71	275.70	386.77	619.03	456.36	420.83		419.03	473.48	461.96	394.17
9/7/06 18:45	24.58	327.71	275.69	386.79	619.03	456.35	420.83		419.03	473.48	461.96	394.15
9/7/06 19:00	24.59	327.71	275.69	386.79	619.02	456.35	420.83		419.03	473.47	461.96	394.16
9/7/06 19:15	24.59	327.71	275.69	386.79	619.03	456.35	420.83		419.03	473.47	461.96	394.15
9/7/06 19:30	24.60	327.71	275.69	386.80	619.02	456.35	420.83		419.03	473.47	461.96	394.16
9/7/06 19:45	24.61	327.71	275.69	386.80	619.03	456.35	420.83		419.03	473.47	461.96	394.16
9/7/06 20:00	24.61	327.71	275.70	386.80	619.02	456.35	420.83		419.03	473.47	461.96	394.16
9/7/06 20:15	24.62	327.71	275.69	386.82	619.03	456.36	420.83		419.03	473.47	461.96	394.16
9/7/06 20:30	24.63	327.71	275.71	386.82	619.03	456.36	420.83		419.04	473.46	461.96	394.16
9/7/06 20:45	24.63	327.71	275.71	386.80	619.03	456.36	420.84		419.04	473.46	461.97	394.18
9/7/06 21:00	24.64	327.72	275.71	386.82	619.04	456.37	420.84		419.04	473.46	461.97	394.18
9/7/06 21:15	24.65	327.72	275.71	386.82	619.04	456.37	420.84		419.05	473.46	461.97	394.19
9/7/06 21:30	24.65	327.73	275.72	386.84	619.04	456.37	420.85		419.05	473.46	461.98	394.19
9/7/06 21:45	24.65	327.73	275.72	386.85	619.04	456.37	420.85		419.05	473.46	461.98	394.19
9/7/06 22:00	24.65	327.73	275.72	386.85	619.05	456.38	420.85		419.05	473.47	461.98	394.19
9/7/06 22:15	24.65	327.73	275.72	386.87	619.05	456.38	420.85		419.05	473.47	461.98	394.19
9/7/06 22:30	24.65	327.73	275.72	386.85	619.05	456.38	420.85		419.06	473.48	461.98	394.19

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
9/7/06 22:45	24.65	327.74	275.73	386.85	619.05	456.38	420.86		419.06	473.48	461.98	394.19
9/7/06 23:00	24.65	327.74	275.73	386.85	619.05	456.38	420.86		419.06	473.48	461.98	394.19
9/7/06 23:15	24.65	327.74	275.73	386.85	619.05	456.38	420.86		419.06	473.49	461.98	394.20
9/7/06 23:30	24.65	327.74	275.74	386.87	619.06	456.39	420.86		419.06	473.49	461.99	394.20
9/7/06 23:45	24.66	327.75	275.74	386.89	619.06	456.39	420.86		419.07	473.49	461.99	394.20
9/8/06 0:00	24.65	327.75	275.74	386.89	619.06	456.39	420.87		419.07	473.49	461.99	394.22
9/8/06 0:15	24.66	327.75	275.74	386.90	619.06	456.39	420.87		419.07	473.49	462.01	394.21
9/8/06 0:30	24.65	327.76	275.75	386.90	619.06	456.39	420.87		419.07	473.49	462.01	394.22
9/8/06 0:45	24.66	327.76	275.75	386.90	619.06	456.40	420.87		419.07	473.49	462.00	394.22
9/8/06 1:00	24.66	327.75	275.75	386.92	619.06	456.40	420.87		419.07	473.50	462.00	394.23
9/8/06 1:15	24.66	327.76	275.74	386.92	619.06	456.40	420.87		419.08	473.50	462.01	394.22
9/8/06 1:30	24.66	327.76	275.75	386.93	619.06	456.40	420.87		419.08	473.50	462.00	394.23
9/8/06 1:45	24.66	327.76	275.74	386.93	619.06	456.40	420.87		419.08	473.50	462.00	394.23
9/8/06 2:00	24.66	327.76	275.75	386.93	619.06	456.40	420.87		419.08	473.50	462.00	394.22
9/8/06 2:15	24.65	327.75	275.74	386.95	619.06	456.39	420.87		419.07	473.50	461.99	394.22
9/8/06 2:30	24.65	327.75	275.74	386.95	619.06	456.39	420.87		419.07	473.50	461.99	394.22
9/8/06 2:45	24.66	327.75	275.74	386.93	619.05	456.39	420.87		419.07	473.49	461.99	394.22
9/8/06 3:00	24.65	327.75	275.74	386.93	619.05	456.38	420.86		419.07	473.49	461.99	394.22
9/8/06 3:15	24.65	327.74	275.73	386.93	619.05	456.38	420.86		419.06	473.49	461.98	394.22
9/8/06 3:30	24.65	327.74	275.73	386.95	619.05	456.38	420.86		419.06	473.49	461.98	394.22
9/8/06 3:45	24.65	327.74	275.73	386.95	619.05	456.38	420.85		419.06	473.48	461.98	394.22
9/8/06 4:00	24.65	327.73	275.72	386.95	619.04	456.37	420.85		419.06	473.48	461.98	394.21
9/8/06 4:15	24.65	327.73	275.73	386.95	619.04	456.37	420.85		419.06	473.48	461.98	394.21
9/8/06 4:30	24.65	327.73	275.72	386.97	619.03	456.37	420.85		419.05	473.48	461.97	394.21
9/8/06 4:45	24.65	327.72	275.72	386.97	619.03	456.36	420.84		419.05	473.47	461.96	394.21
9/8/06 5:00	24.65	327.72	275.72	386.97	619.03	456.36	420.84		419.04	473.47	461.96	394.20
9/8/06 5:15	24.65	327.72	275.71	386.97	619.03	456.36	420.84		419.04	473.47	461.96	394.21
9/8/06 5:30	24.65	327.71	275.71	386.97	619.02	456.35	420.83		419.04	473.46	461.96	394.19
9/8/06 5:45	24.65	327.71	275.71	386.98	619.02	456.35	420.83		419.04	473.46	461.96	394.19
9/8/06 6:00	24.65	327.71	275.71	386.98	619.02	456.35	420.83		419.04	473.46	461.96	394.20
9/8/06 6:15	24.65	327.71	275.71	386.98	619.02	456.35	420.83		419.04	473.45	461.96	394.20
9/8/06 6:30	24.66	327.71	275.71	387.00	619.02	456.35	420.83		419.03	473.45	461.96	394.20
9/8/06 6:45	24.66	327.71	275.71	387.00	619.02	456.34	420.83		419.03	473.45	461.95	394.19
9/8/06 7:00	24.66	327.71	275.71	387.00	619.02	456.34	420.83		419.03	473.45	461.95	394.20
9/8/06 7:15	24.66	327.71	275.71	387.00	619.02	456.34	420.83		419.04	473.45	461.96	394.20
9/8/06 7:30	24.66	327.71	275.71	387.02	619.02	456.35	420.82		419.04	473.45	461.96	394.20
9/8/06 7:45	24.66	327.71	275.71	387.02	619.02	456.35	420.83		419.04	473.44	461.96	394.20
9/8/06 8:00	24.65	327.71	275.71	387.03	619.02	456.35	420.83		419.04	473.45	461.96	394.21
9/8/06 8:15	24.65	327.71	275.72	387.03	619.02	456.35	420.83		419.04	473.45	461.96	394.21
9/8/06 8:30	24.64	327.71	275.72	387.03	619.02	456.35	420.83		419.04	473.45	461.96	394.22
9/8/06 8:45	24.64	327.71	275.72	387.05	619.03	456.35	420.83		419.04	473.45	461.96	394.21
9/8/06 9:00	24.63	327.72	275.71	387.05	619.03	456.35	420.83		419.04	473.45	461.97	394.21
9/8/06 9:15	24.63	327.72	275.72	387.07	619.03	456.36	420.84		419.05	473.45	461.98	394.22
9/8/06 9:30	24.63	327.73	275.73	387.08	619.03	456.36	420.84		419.05	473.45	461.98	394.23
9/8/06 9:45	24.63	327.73	275.73	387.08	619.04	456.37	420.84		419.05	473.46	461.98	394.23
9/8/06 10:00	24.64	327.74	275.73	387.10	619.05	456.37	420.85		419.06	473.46	461.99	394.24
9/8/06 10:15	24.63	327.74	275.74	387.10	619.05	456.37	420.85		419.06	473.46	461.99	394.24
9/8/06 10:30	24.63	327.74	275.74	387.12	619.05	456.38	420.85		419.06	473.46	461.99	394.25
9/8/06 10:45	24.63	327.74	275.75	387.13	619.05	456.38	420.86		419.07	473.47	462.00	394.25
9/8/06 11:00	24.63	327.75	275.75	387.15	619.06	456.38	420.86		419.07	473.47	462.01	394.25
9/8/06 11:15	24.63	327.75	275.75	387.13	619.06	456.39	420.87		419.08	473.48	462.01	394.25
9/8/06 11:30	24.62	327.75	275.75	387.15	619.06	456.39	420.87		419.07	473.48	462.00	394.26
9/8/06 11:45	24.61	327.76	275.75	387.17	619.06	456.39	420.87		419.08	473.49	462.01	394.27
9/8/06 12:00	24.61	327.75	275.75	387.17	619.06	456.39	420.87		419.08	473.49	462.00	394.27
9/8/06 12:15	24.60	327.75	275.76	387.18	619.06	456.39	420.87		419.08	473.50	462.01	394.27
9/8/06 12:30	24.60	327.76	275.76	387.18	619.06	456.39	420.87		419.08	473.50	462.00	394.27
9/8/06 12:45	24.59	327.76	275.75	387.20	619.07	456.39	420.87		419.09	473.50	462.00	394.27
9/8/06 13:00	24.58	327.75	275.76	387.20	619.06	456.39	420.87		419.07	473.51	462.00	394.28
9/8/06 13:15	24.58	327.76	275.75	387.20	619.06	456.39	420.87		419.07	473.51	462.01	394.28
9/8/06 13:30	24.57	327.76	275.76	387.22	619.06	456.39	420.87		419.07	473.51	462.01	394.27
9/8/06 13:45	24.57	327.75	275.75	387.22	619.06	456.39	420.87		419.07	473.52	462.01	394.27
9/8/06 14:00	24.58	327.76	275.76	387.23	619.06	456.39	420.87		419.08	473.51	461.99	394.28
9/8/06 14:15	24.57	327.76	275.76	387.23	619.05	456.39	420.87		419.08	473.52	462.01	394.27
9/8/06 14:30	24.57	327.76	275.75	387.23	619.06	456.39	420.87		419.08	473.52	462.00	394.28
9/8/06 14:45	24.56	327.75	275.75	387.25	619.05	456.38	420.86		419.07	473.52	461.99	394.28
9/8/06 15:00	24.55	327.74	275.75	387.25	619.05	456.38	420.86		419.07	473.52	461.99	394.28
9/8/06 15:15	24.56	327.75	275.74	387.26	619.04	456.37	420.86		419.06	473.52	461.98	394.28
9/8/06 15:30	24.55	327.74	275.74	387.26	619.04	456.37	420.85		419.06	473.52	461.98	394.28
9/8/06 15:45	24.56	327.74	275.74	387.26	619.04	456.36	420.85		419.06	473.51	461.98	394.28
9/8/06 16:00	24.55	327.73	275.73	387.26	619.03	456.36	420.84		419.05	473.51	461.97	394.28
9/8/06 16:15	24.56	327.73	275.73	387.26	619.03	456.36	420.85		419.05	473.52	461.98	394.28
9/8/06 16:30	24.56	327.73	275.73	387.26	619.03	456.35	420.84		419.05	473.51	461.97	394.28
9/8/06 16:45	24.56	327.72	275.73	387.28	619.02	456.35	420.84		419.04	473.51	461.96	394.27
9/8/06 17:00	24.56	327.72	275.73	387.28	619.02	456.35	420.83		419.04	473.51	461.96	394.28
9/8/06 17:15	24.56	327.71	275.72	387.28	619.02	456.34	420.83		419.04	473.50	461.95	394.28
9/8/06 17:30	24.56	327.71	275.71	387.28	619.01	456.34	420.83		419.04	473.50	461.96	394.27
9/8/06 17:45	24.56	327.71	275.71	387.30	619.01	456.34	420.83		419.03	473.50	461.96	394.28
9/8/06 18:00	24.56	327.71	275.71	387.31	619.01	456.34	420.82		419.03	473.49	461.95	394.28
9/8/06 18:15	24.57	327.71	275.71	387.30	619.01	456.34	420.82		419.03	473.49	461.95	394.28
9/8/06 18:30	24.57	327.71	275.71	387.31	619.01	456.33	420.82		419.03	473.49	461.94	394.28
9/8/06 18:45	24.57	327.70	275.71	387.31	619.00	456.33	420.82		419.03	473.49	461.94	394.28
9/8/06 19:00	24.58	327.70	275.71	387.33	619.00	456.33	420.82		419.03	473.48	461.95	394.28
9/8/06 19:15	24.59	327.71	275.71	387.33	619.00	456.33	420.82		419.02	473.48	461.94	394.28
9/8/06 19:30	24.59	327.71	275.71	387.35	619.00	456.33	420.82		419.02	473.48	461.94	394.28
9/8/06 19:45	24.60	327.71	275.71	387.35	619.00	456.33	420.82		419.03	473.47	461.94	394.28
9/8/06 20:00	24.60	327.71	275.71	387.36	619.00	456.33	420.82		419.03	473.47	461.95	394.28
9/8/06 20:15	24.61	327.71	275.72	387.38	619.01	456.33	420.82		419.03	473.47	461.94	394.29
9/8/06 20:30	24.62	327.71	275.73	387.40	619.01	456.33	420.82		419.03	473.46	461.96	394.30
9/8/06 20:45	24.62	327.71	275.73	387.40	619.01	456.34	420.83		419.03	473.46	461.96	394.31
9/8/06 21:00	24.63	327.72	275.73	387.41	619.01	456.34	420.83		419.04	473.46	461.96	394.32
9/8/06 21:15	24.63	327.72	275.73	387.43	619.02	456.35	420.83		419.04	473.46	461.96	394.32
9/8/06 21:30	24.63	327.73	275.74	387.43	619.02	456.35	420.83		419.04	473.47	461.96	394.32
9/8/06 21:45	24.63	327.73	275.74	387.45	619.02	456.35	420.84		419.05	473.47	461.96	394.33
9/8/06 22:00	24.63	327.73	275.74	387.45	619.02	456.35	420.84		419.05	473.47	461.96	394.33
9/8/06 22:15	24.63	327.74	275.75	387.46	619.03	456.35	420.84		419.05	473.47	461.97	394.34
9/8/06 22:30	24.63	327.74	275.75	387.48	619.03	456.36	420.84		419.05	473.48	461.97	394.34
9/8/06 22:45	24.63	327.74	275.75	387.48	619.03	456.36	420.84		419.06	473.48	461.98	394.35
9/8/06 23:00	24.63	327.74	275.75	387.50	619.04	456.36	420.85		419.06	473.48	461.97	394.36
9/8/06 23:15	24.63	327.75	275.76	387.50	619.04	456.37	420.85		419.06	473.49	461.98	394.37
9/8/06 23:30	24.63	327.75	275.76	387.51	619.04	456.37	420.86		419.06	473.49	461.98	394.36

Power Resources, Inc.
Regional Southwest Area Aquifer Tests
Appendix D-1 - 15-minute Depth to Water Data (All Monitoring Wells)

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
9/8/06 23:45	24.63	327.75	275.77	387.53	619.04	456.37	420.86		419.07	473.49	461.98	394.37
9/9/06 0:00	24.63	327.75	275.77	387.53	619.04	456.37	420.86		419.07	473.50	461.98	394.38
9/9/06 0:15	24.62	327.76	275.77	387.55	619.05	456.38	420.86		419.07	473.50	461.98	394.38
9/9/06 0:30	24.63	327.76	275.77	387.55	619.05	456.37	420.86		419.07	473.50	461.98	394.38
9/9/06 0:45	24.63	327.76	275.77	387.56	619.05	456.38	420.87		419.07	473.50	461.99	394.39
9/9/06 1:00	24.62	327.76	275.77	387.56	619.05	456.38	420.87		419.07	473.51	461.99	394.39
9/9/06 1:15	24.63	327.76	275.77	387.58	619.05	456.38	420.87		419.07	473.51	461.98	394.40
9/9/06 1:30	24.63	327.76	275.78	387.58	619.05	456.38	420.87		419.07	473.51	461.99	394.40
9/9/06 1:45	24.62	327.76	275.78	387.60	619.05	456.38	420.87		419.08	473.51	461.99	394.41
9/9/06 2:00	24.62	327.77	275.78	387.61	619.05	456.38	420.87		419.07	473.51	461.98	394.42
9/9/06 2:15	24.62	327.76	275.78	387.61	619.05	456.38	420.87		419.07	473.51	461.98	394.41
9/9/06 2:30	24.62	327.76	275.78	387.61	619.05	456.38	420.87		419.07	473.51	461.98	394.42
9/9/06 2:45	24.62	327.76	275.78	387.63	619.05	456.38	420.87		419.07	473.51	461.99	394.42
9/9/06 3:00	24.62	327.76	275.78	387.63	619.05	456.37	420.87		419.07	473.51	461.99	394.43
9/9/06 3:15	24.62	327.76	275.78	387.64	619.05	456.37	420.86		419.07	473.51	461.99	394.42
9/9/06 3:30	24.62	327.76	275.78	387.64	619.05	456.37	420.86		419.07	473.51	461.98	394.43
9/9/06 3:45	24.62	327.76	275.77	387.64	619.04	456.37	420.86		419.06	473.51	461.98	394.43
9/9/06 4:00	24.61	327.76	275.77	387.66	619.04	456.36	420.85		419.06	473.51	461.98	394.43
9/9/06 4:15	24.61	327.75	275.77	387.66	619.03	456.36	420.85		419.06	473.50	461.97	394.42
9/9/06 4:30	24.62	327.75	275.77	387.66	619.03	456.36	420.85		419.06	473.50	461.97	394.42
9/9/06 4:45	24.62	327.75	275.77	387.68	619.03	456.36	420.85		419.06	473.49	461.98	394.43
9/9/06 5:00	24.62	327.75	275.77	387.68	619.03	456.35	420.85		419.05	473.49	461.97	394.43
9/9/06 5:15	24.62	327.74	275.76	387.68	619.02	456.35	420.84		419.05	473.49	461.96	394.43
9/9/06 5:30	24.62	327.74	275.76	387.69	619.02	456.35	420.84		419.05	473.48	461.96	394.43
9/9/06 5:45	24.63	327.74	275.76	387.69	619.02	456.34	420.84		419.05	473.48	461.96	394.43
9/9/06 6:00	24.62	327.74	275.76	387.69	619.01	456.34	420.83		419.04	473.48	461.96	394.43
9/9/06 6:15	24.62	327.73	275.75	387.71	619.01	456.34	420.83		419.04	473.48	461.96	394.43
9/9/06 6:30	24.62	327.73	275.75	387.71	619.01	456.33	420.83		419.04	473.47	461.95	394.43
9/9/06 6:45	24.63	327.73	275.75	387.71	619.01	456.33	420.83		419.04	473.47	461.95	394.43
9/9/06 7:00	24.63	327.73	275.75	387.73	619.01	456.32	420.82		419.03	473.46	461.94	394.44
9/9/06 7:15	24.62	327.73	275.75	387.73	619.00	456.33	420.82		419.03	473.46	461.94	394.43
9/9/06 7:30	24.62	327.73	275.75	387.74	619.00	456.32	420.82		419.03	473.46	461.94	394.44
9/9/06 7:45	24.62	327.73	275.75	387.74	619.00	456.32	420.82		419.03	473.46	461.94	394.43
9/9/06 8:00	24.62	327.73	275.75	387.74	619.00	456.32	420.82		419.03	473.46	461.94	394.45
9/9/06 8:15	24.62	327.73	275.75	387.76	619.00	456.32	420.82		419.03	473.46	461.95	394.45
9/9/06 8:30	24.62	327.73	275.75	387.76	618.99	456.32	420.82		419.03	473.46	461.93	394.44
9/9/06 8:45	24.62	327.73	275.75	387.78	618.99	456.32	420.82		419.02	473.46	461.93	394.45
9/9/06 9:00	24.61	327.73	275.75	387.78	619.00	456.32	420.81		419.03	473.46	461.93	394.45
9/9/06 9:15	24.62	327.73	275.75	387.79	619.00	456.32	420.82		419.03	473.46	461.94	394.46
9/9/06 9:30	24.62	327.74	275.76	387.79	619.00	456.32	420.82		419.03	473.46	461.94	394.46
9/9/06 9:45	24.62	327.74	275.76	387.81	619.01	456.33	420.82		419.03	473.46	461.94	394.48
9/9/06 10:00	24.61	327.74	275.76	387.81	619.01	456.33	420.83		419.03	473.46	461.94	394.46
9/9/06 10:15	24.62	327.74	275.77	387.83	619.00	456.34	420.83		419.04	473.47	461.95	394.48
9/9/06 10:30	24.62	327.75	275.77	387.84	619.01	456.34	420.83		419.04	473.47	461.96	394.48
9/9/06 10:45	24.62	327.75	275.77	387.84	619.01	456.34	420.83		419.04	473.47	461.96	394.49
9/9/06 11:00	24.61	327.75	275.78	387.86	619.01	456.34	420.83		419.04	473.48	461.96	394.49
9/9/06 11:15	24.61	327.76	275.78	387.88	619.01	456.34	420.84		419.05	473.48	461.96	394.49
9/9/06 11:30	24.60	327.76	275.78	387.88	619.02	456.35	420.84		419.05	473.48	461.96	394.51
9/9/06 11:45	24.60	327.76	275.79	387.88	619.02	456.35	420.84		419.05	473.48	461.97	394.51
9/9/06 12:00	24.60	327.77	275.79	387.91	619.02	456.35	420.85		419.06	473.49	461.97	394.52
9/9/06 12:15	24.60	327.77	275.79	387.91	619.02	456.35	420.85		419.05	473.50	461.97	394.52
9/9/06 12:30	24.59	327.77	275.80	387.93	619.02	456.35	420.85		419.05	473.50	461.96	394.53
9/9/06 12:45	24.59	327.77	275.80	387.93	619.03	456.35	420.85		419.06	473.50	461.96	394.53
9/9/06 13:00	24.59	327.78	275.80	387.93	619.02	456.36	420.85		419.06	473.50	461.97	394.53
9/9/06 13:15	24.58	327.78	275.79	387.94	619.03	456.36	420.85		419.05	473.51	461.97	394.53
9/9/06 13:30	24.57	327.78	275.79	387.94	619.03	456.36	420.85		419.05	473.51	461.97	394.54
9/9/06 13:45	24.56	327.78	275.80	387.96	619.03	456.36	420.85		419.06	473.51	461.98	394.55
9/9/06 14:00	24.56	327.78	275.81	387.96	619.03	456.36	420.85		419.06	473.51	461.97	394.54
9/9/06 14:15	24.56	327.78	275.81	387.97	619.03	456.36	420.86		419.06	473.51	461.97	394.55
9/9/06 14:30	24.57	327.78	275.80	387.99	619.03	456.36	420.86		419.06	473.51	461.97	394.56
9/9/06 14:45	24.56	327.78	275.80	387.99	619.03	456.36	420.86		419.06	473.51	461.97	394.55
9/9/06 15:00	24.57	327.78	275.81	387.99	619.03	456.36	420.85		419.05	473.51	461.98	394.56
9/9/06 15:15	24.57	327.78	275.81	388.01	619.03	456.35	420.85		419.06	473.51	461.97	394.57
9/9/06 15:30	24.58	327.78	275.81	388.01	619.03	456.35	420.85		419.05	473.51	461.98	394.58
9/9/06 15:45	24.58	327.78	275.80	388.02	619.02	456.35	420.85		419.05	473.50	461.97	394.58
9/9/06 16:00	24.58	327.78	275.81	388.04	619.02	456.35	420.85		419.05	473.51	461.96	394.58
9/9/06 16:15	24.58	327.78	275.81	388.04	619.02	456.35	420.85		419.05	473.50	461.96	394.58
9/9/06 16:30	24.58	327.78	275.80	388.06	619.01	456.34	420.85		419.04	473.50	461.96	394.58
9/9/06 16:45	24.59	327.78	275.80	388.06	619.01	456.34	420.84		419.05	473.50	461.96	394.58
9/9/06 17:00	24.59	327.78	275.80	388.06	619.01	456.34	420.84		419.04	473.49	461.96	394.58
9/9/06 17:15	24.59	327.78	275.80	388.06	619.01	456.34	420.84		419.04	473.49	461.96	394.58
9/9/06 17:30	24.59	327.77	275.80	388.07	619.00	456.34	420.84		419.04	473.48	461.96	394.59
9/9/06 17:45	24.60	327.78	275.80	388.07	619.00	456.34	420.84		419.04	473.48	461.96	394.58
9/9/06 18:00	24.60	327.77	275.80	388.09	619.00	456.34	420.84		419.04	473.48	461.96	394.59
9/9/06 18:15	24.61	327.77	275.80	388.09	619.00	456.33	420.83		419.04	473.48	461.95	394.60
9/9/06 18:30	24.60	327.77	275.80	388.11	619.00	456.33	420.84		419.04	473.47	461.95	394.60
9/9/06 18:45	24.61	327.78	275.80	388.11	619.00	456.33	420.83		419.03	473.47	461.95	394.60
9/9/06 19:00	24.62	327.78	275.80	388.11	619.00	456.33	420.83		419.03	473.46	461.96	394.61
9/9/06 19:15	24.62	327.78	275.80	388.12	619.00	456.33	420.83		419.04	473.46	461.95	394.62
9/9/06 19:30	24.62	327.78	275.81	388.14	619.00	456.33	420.83		419.04	473.46	461.95	394.62
9/9/06 19:45	24.62	327.78	275.81	388.14	619.00	456.33	420.83		419.03	473.46	461.94	394.62
9/9/06 20:00	24.63	327.78	275.81	388.16	619.00	456.33	420.83		419.03	473.46	461.95	394.62
9/9/06 20:15	24.63	327.78	275.81	388.16	619.00	456.33	420.83		419.03	473.45	461.95	394.63
9/9/06 20:30	24.63	327.78	275.81	388.17	619.00	456.33	420.83		419.04	473.45	461.95	394.63
9/9/06 20:45	24.63	327.79	275.82	388.17	619.01	456.34	420.84		419.04	473.45	461.95	394.64
9/9/06 21:00	24.64	327.79	275.82	388.17	619.01	456.34	420.84		419.04	473.45	461.95	394.64
9/9/06 21:15	24.64	327.79	275.82	388.21	619.01	456.34	420.84		419.04	473.45	461.96	394.66
9/9/06 21:30	24.64	327.80	275.83	388.21	619.01	456.35	420.84		419.05	473.45	461.96	394.66
9/9/06 21:45	24.64	327.80	275.83	388.22	619.01	456.35	420.84		419.05	473.45	461.96	394.67
9/9/06 22:00	24.64	327.80	275.84	388.22	619.01	456.35	420.85		419.05	473.46	461.96	394.67
9/9/06 22:15	24.64	327.81	275.84	388.24	619.01	456.35	420.85		419.05	473.46	461.96	394.68
9/9/06 22:30	24.64	327.81	275.84	388.26	619.02	456.35	420.85		419.05	473.46	461.98	394.68
9/9/06 22:45	24.64	327.81	275.85	388.26	619.02	456.36	420.86		419.06	473.46	461.98	394.69
9/9/06 23:00	24.64	327.81	275.85	388.27	619.03	456.36	420.86		419.06	473.46	461.98	394.70
9/9/06 23:15	24.65	327.82	275.86	388.29	619.03	456.36	420.86		419.06	473.47	461.98	394.71
9/9/06 23:30	24.65	327.83	275.86	388.29	619.03	456.37	420.87		419.07	473.47	461.98	394.72
9/9/06 23:45	24.65	327.83	275.86	388.31	619.04	456.37	420.87		419.07	473.47	461.99	394.73
9/10/06 0:00	24.65	327.84	275.87	388.32	619.04	456.37	420.87		419.08	473.48	461.99	394.73
9/10/06 0:15	24.65	327.84	275.88	388.32	619.04	456.38	420.87		419.08	473.48	462.00	394.74
9/10/06 0:30	24.65	327.84	275.88	388.34	619.05	456.38	420.88		419.08	473.48	462.00	394.75

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
9/10/06 0:45	24.65	327.85	275.88	388.35	619.05	456.38	420.88		419.08	473.49	462.00	394.75
9/10/06 1:00	24.64	327.85	275.88	388.35	619.05	456.38	420.88		419.08	473.49	462.00	394.76
9/10/06 1:15	24.65	327.85	275.88	388.37	619.05	456.38	420.88		419.08	473.49	462.00	394.76
9/10/06 1:30	24.64	327.85	275.89	388.37	619.05	456.38	420.88		419.08	473.49	462.01	394.77
9/10/06 1:45	24.64	327.85	275.89	388.39	619.05	456.38	420.89		419.08	473.50	462.01	394.77
9/10/06 2:00	24.64	327.86	275.89	388.39	619.05	456.38	420.88		419.09	473.50	462.00	394.77
9/10/06 2:15	24.64	327.86	275.89	388.40	619.05	456.39	420.89		419.09	473.50	462.01	394.78
9/10/06 2:30	24.63	327.86	275.89	388.40	619.05	456.38	420.89		419.09	473.50	462.01	394.78
9/10/06 2:45	24.64	327.86	275.90	388.42	619.05	456.38	420.89		419.09	473.50	462.00	394.79
9/10/06 3:00	24.64	327.86	275.90	388.42	619.05	456.39	420.89		419.09	473.50	462.01	394.79
9/10/06 3:15	24.64	327.86	275.90	388.44	619.05	456.38	420.89		419.09	473.50	462.01	394.80
9/10/06 3:30	24.64	327.87	275.90	388.44	619.05	456.38	420.89		419.09	473.50	462.01	394.80
9/10/06 3:45	24.64	327.87	275.90	388.45	619.05	456.38	420.89		419.08	473.49	462.00	394.81
9/10/06 4:00	24.64	327.87	275.90	388.45	619.05	456.38	420.88		419.08	473.49	462.00	394.81
9/10/06 4:15	24.64	327.87	275.90	388.45	619.05	456.38	420.88		419.08	473.49	462.00	394.81
9/10/06 4:30	24.65	327.86	275.90	388.47	619.05	456.38	420.88		419.08	473.49	462.00	394.82
9/10/06 4:45	24.64	327.86	275.90	388.47	619.04	456.37	420.88		419.08	473.48	462.00	394.82
9/10/06 5:00	24.65	327.86	275.90	388.49	619.04	456.37	420.88		419.08	473.48	462.00	394.82
9/10/06 5:15	24.65	327.86	275.90	388.49	619.04	456.37	420.88		419.08	473.48	461.99	394.82
9/10/06 5:30	24.65	327.86	275.90	388.49	619.04	456.37	420.87		419.07	473.47	461.98	394.82
9/10/06 5:45	24.65	327.86	275.90	388.50	619.04	456.37	420.87		419.07	473.47	461.99	394.82
9/10/06 6:00	24.65	327.86	275.90	388.50	619.03	456.37	420.87		419.07	473.46	461.98	394.82
9/10/06 6:15	24.65	327.86	275.90	388.50	619.03	456.36	420.87		419.06	473.46	461.98	394.83
9/10/06 6:30	24.65	327.86	275.89	388.52	619.03	456.36	420.87		419.06	473.46	461.98	394.83
9/10/06 6:45	24.66	327.86	275.89	388.54	619.03	456.36	420.86		419.06	473.45	461.98	394.83
9/10/06 7:00	24.66	327.86	275.89	388.54	619.02	456.36	420.86		419.06	473.45	461.98	394.83
9/10/06 7:15	24.66	327.86	275.90	388.54	619.02	456.36	420.86		419.06	473.44	461.98	394.83
9/10/06 7:30	24.67	327.86	275.90	388.55	619.02	456.35	420.86		419.06	473.44	461.98	394.84
9/10/06 7:45	24.67	327.86	275.90	388.55	619.02	456.35	420.86		419.06	473.43	461.98	394.85
9/10/06 8:00	24.67	327.86	275.90	388.55	619.02	456.35	420.86		419.06	473.43	461.98	394.85
9/10/06 8:15	24.67	327.87	275.90	388.57	619.02	456.35	420.86		419.06	473.42	461.98	394.86
9/10/06 8:30	24.68	327.86	275.90	388.57	619.02	456.35	420.86		419.06	473.42	461.98	394.86
9/10/06 8:45	24.67	327.87	275.90	388.59	619.02	456.35	420.86		419.06	473.42	461.98	394.87
9/10/06 9:00	24.67	327.87	275.91	388.59	619.02	456.35	420.86		419.06	473.42	461.97	394.87
9/10/06 9:15	24.67	327.87	275.91	388.60	619.02	456.35	420.86		419.06	473.42	461.98	394.87
9/10/06 9:30	24.66	327.87	275.91	388.60	619.02	456.35	420.86		419.06	473.42	461.98	394.87
9/10/06 9:45	24.67	327.87	275.91	388.60	619.03	456.36	420.86		419.07	473.41	461.98	394.87
9/10/06 10:00	24.67	327.88	275.92	388.62	619.03	456.36	420.86		419.07	473.41	461.98	394.88
9/10/06 10:15	24.66	327.88	275.91	388.64	619.03	456.36	420.86		419.07	473.41	461.99	394.89
9/10/06 10:30	24.66	327.89	275.93	388.64	619.03	456.36	420.86		419.07	473.42	461.98	394.90
9/10/06 10:45	24.65	327.89	275.93	388.65	619.04	456.36	420.87		419.07	473.42	461.99	394.91
9/10/06 11:00	24.65	327.89	275.93	388.65	619.04	456.37	420.87		419.07	473.42	461.99	394.92
9/10/06 11:15	24.65	327.89	275.94	388.67	619.04	456.37	420.87		419.08	473.42	462.00	394.91
9/10/06 11:30	24.64	327.90	275.96	388.67	619.04	456.37	420.87		419.08	473.42	462.00	394.92
9/10/06 11:45	24.63	327.90	275.94	388.68	619.05	456.37	420.87		419.08	473.42	461.99	394.92
9/10/06 12:00	24.63	327.91	275.95	388.68	619.05	456.37	420.87		419.08	473.42	462.00	394.93
9/10/06 12:15	24.63	327.91	275.95	388.70	619.05	456.38	420.88		419.08	473.43	462.00	394.94
9/10/06 12:30	24.62	327.91	275.94	388.72	619.05	456.38	420.88		419.08	473.43	462.00	394.95
9/10/06 12:45	24.62	327.91	275.96	388.72	619.05	456.38	420.88		419.09	473.44	462.01	394.95
9/10/06 13:00	24.61	327.92	275.96	388.72	619.05	456.37	420.88		419.08	473.44	462.01	394.96
9/10/06 13:15	24.60	327.92	275.95	388.73	619.05	456.38	420.88		419.08	473.44	462.01	394.96
9/10/06 13:30	24.61	327.92	275.97	388.75	619.05	456.38	420.88		419.08	473.44	462.01	394.97
9/10/06 13:45	24.60	327.92	275.96	388.75	619.05	456.38	420.88		419.09	473.45	462.01	394.97
9/10/06 14:00	24.60	327.92	275.96	388.75	619.05	456.38	420.88		419.08	473.45	462.01	394.97
9/10/06 14:15	24.59	327.92	275.95	388.77	619.05	456.38	420.89		419.06	473.45	462.01	394.98
9/10/06 14:30	24.59	327.92	275.96	388.77	619.05	456.38	420.89		419.08	473.45	462.01	394.98
9/10/06 14:45	24.59	327.92	275.96	388.78	619.05	456.38	420.88		419.08	473.46	462.00	394.98
9/10/06 15:00	24.59	327.93	275.96	388.78	619.05	456.38	420.88		419.07	473.46	462.01	394.99
9/10/06 15:15	24.59	327.93	275.97	388.80	619.05	456.38	420.88		419.07	473.46	462.01	394.99
9/10/06 15:30	24.60	327.92	275.97	388.80	619.05	456.38	420.89		419.07	473.46	462.01	394.99
9/10/06 15:45	24.60	327.92	275.96	388.82	619.05	456.37	420.88		419.09	473.46	462.01	395.00
9/10/06 16:00	24.61	327.92	275.96	388.82	619.04	456.37	420.88		419.07	473.46	461.99	395.01
9/10/06 16:15	24.61	327.93	275.96	388.82	619.04	456.37	420.88		419.07	473.45	461.99	395.01
9/10/06 16:30	24.62	327.93	275.97	388.83	619.04	456.37	420.88		419.07	473.45	461.99	395.01
9/10/06 16:45	24.63	327.93	275.98	388.85	619.04	456.37	420.88		419.07	473.45	462.00	395.01
9/10/06 17:00	24.62	327.93	275.97	388.83	619.04	456.36	420.87		419.07	473.45	461.99	395.02
9/10/06 17:15	24.62	327.93	275.97	388.85	619.03	456.36	420.87		419.07	473.44	461.98	395.02
9/10/06 17:30	24.63	327.93	275.97	388.85	619.04	456.36	420.87		419.07	473.44	461.98	395.02
9/10/06 17:45	24.63	327.93	275.97	388.87	619.04	456.36	420.87		419.07	473.44	461.99	395.02
9/10/06 18:00	24.63	327.93	275.97	388.87	619.04	456.36	420.87		419.07	473.43	461.98	395.03
9/10/06 18:15	24.64	327.93	275.97	388.87	619.03	456.36	420.87		419.06	473.43	461.98	395.03
9/10/06 18:30	24.64	327.93	275.97	388.88	619.03	456.36	420.87		419.06	473.43	461.99	395.04
9/10/06 18:45	24.65	327.94	275.98	388.90	619.03	456.36	420.87		419.06	473.42	461.99	395.04
9/10/06 19:00	24.66	327.94	275.98	388.92	619.03	456.36	420.87		419.06	473.41	462.00	395.05
9/10/06 19:15	24.67	327.94	275.98	388.92	619.03	456.36	420.87		419.07	473.41	461.99	395.05
9/10/06 19:30	24.68	327.94	275.98	388.93	619.03	456.36	420.87		419.07	473.40	461.99	395.06
9/10/06 19:45	24.68	327.94	275.99	388.93	619.03	456.37	420.87		419.07	473.40	462.01	395.06
9/10/06 20:00	24.67	327.95	275.99	388.95	619.03	456.36	420.88		419.07	473.41	462.00	395.07
9/10/06 20:15	24.68	327.95	275.99	388.95	619.03	456.36	420.87		419.06	473.41	461.99	395.06
9/10/06 20:30	24.69	327.95	275.99	388.95	619.03	456.37	420.87		419.07	473.40	461.99	395.08
9/10/06 20:45	24.70	327.95	276.00	388.97	619.04	456.37	420.88		419.07	473.40	461.99	395.08
9/10/06 21:00	24.71	327.96	276.00	388.98	619.04	456.37	420.88		419.07	473.39	462.00	395.08
9/10/06 21:15	24.71	327.96	276.01	388.98	619.04	456.37	420.88		419.07	473.39	462.00	395.11
9/10/06 21:30	24.71	327.97	276.01	389.00	619.04	456.37	420.88		419.08	473.40	462.00	395.11
9/10/06 21:45	24.71	327.97	276.02	389.02	619.04	456.37	420.88		419.08	473.40	462.00	395.11
9/10/06 22:00	24.70	327.97	276.01	389.02	619.04	456.37	420.89		419.08	473.40	462.00	395.11
9/10/06 22:15	24.70	327.97	276.02	389.02	619.04	456.38	420.89		419.08	473.41	462.00	395.12
9/10/06 22:30	24.70	327.98	276.03	389.03	619.04	456.38	420.89		419.08	473.41	462.01	395.12
9/10/06 22:45	24.70	327.98	276.03	389.03	619.05	456.38	420.89		419.08	473.41	462.01	395.13
9/10/06 23:00	24.71	327.98	276.03	389.06	619.05	456.38	420.89		419.08	473.41	462.01	395.14
9/10/06 23:15	24.71	327.99	276.04	389.05	619.05	456.39	420.89		419.09	473.41	462.01	395.15
9/10/06 23:30	24.71	327.99	276.04	389.06	619.05	456.39	420.90		419.09	473.41	462.02	395.16
9/10/06 23:45	24.71	328.00	276.05	389.08	619.06	456.39	420.90		419.09	473.42	462.02	395.16
9/11/06 0:00	24.71	328.00	276.05	389.08	619.06	456.39	420.91		419.09	473.42	462.03	395.16
9/11/06 0:15	24.72	328.01	276.05	389.10	619.06	456.40	420.91		419.10	473.42	462.03	395.18
9/11/06 0:30	24.71	328.01	276.06	389.11	619.07	456.40	420.91		419.10	473.43	462.04	395.18
9/11/06 0:45	24.71	328.01	276.06	389.13	619.07	456.40	420.91		419.10	473.43	462.04	395.20
9/11/06 1:00	24.71	328.02	276.07	389.13	619.07	456.40	420.91		419.11	473.43	462.04	395.20
9/11/06 1:15	24.71	328.03	276.07	389.15	619.07	456.41	420.92		419.11	473.44	462.04	395.21
9/11/06 1:30	24.71	328.03	276.08	389.15	619.07	456.41	420.92		419.11	473.44	462.04	395.21

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
9/11/06 1:45	24.71	328.03	276.08	389.16	619.08	456.41	420.92		419.11	473.44	462.04	395.21
9/11/06 2:00	24.72	328.04	276.09	389.16	619.08	456.41	420.92		419.11	473.44	462.05	395.23
9/11/06 2:15	24.72	328.04	276.09	389.18	619.09	456.42	420.93		419.12	473.44	462.04	395.23
9/11/06 2:30	24.72	328.05	276.09	389.20	619.08	456.42	420.93		419.12	473.45	462.06	395.24
9/11/06 2:45	24.72	328.05	276.09	389.20	619.08	456.42	420.93		419.12	473.44	462.05	395.25
9/11/06 3:00	24.72	328.05	276.10	389.20	619.09	456.42	420.93		419.13	473.44	462.06	395.25
9/11/06 3:15	24.73	328.05	276.10	389.21	619.09	456.42	420.93		419.12	473.44	462.06	395.26
9/11/06 3:30	24.73	328.06	276.10	389.21	619.09	456.42	420.93		419.13	473.44	462.06	395.26
9/11/06 3:45	24.72	328.05	276.10	389.23	619.09	456.42	420.93		419.12	473.45	462.06	395.26
9/11/06 4:00	24.72	328.05	276.10	389.23	619.08	456.41	420.93		419.12	473.44	462.05	395.26
9/11/06 4:15	24.72	328.06	276.11	389.25	619.09	456.42	420.93		419.12	473.44	462.06	395.26
9/11/06 4:30	24.72	328.06	276.11	389.25	619.09	456.42	420.93		419.12	473.44	462.06	395.27
9/11/06 4:45	24.72	328.06	276.11	389.25	619.08	456.41	420.93		419.12	473.44	462.05	395.28
9/11/06 5:00	24.72	328.06	276.11	389.26	619.08	456.41	420.93		419.12	473.44	462.05	395.27
9/11/06 5:15	24.73	328.06	276.11	389.26	619.08	456.41	420.92		419.11	473.43	462.04	395.28
9/11/06 5:30	24.73	328.06	276.11	389.28	619.08	456.41	420.92		419.12	473.43	462.05	395.28
9/11/06 5:45	24.73	328.06	276.11	389.28	619.08	456.41	420.92		419.12	473.42	462.05	395.29
9/11/06 6:00	24.74	328.06	276.11	389.30	619.08	456.41	420.92		419.11	473.41	462.05	395.30
9/11/06 6:15	24.74	328.07	276.11	389.30	619.08	456.41	420.92		419.11	473.41	462.05	395.30
9/11/06 6:30	24.75	328.07	276.12	389.31	619.08	456.41	420.92		419.11	473.40	462.05	395.31
9/11/06 6:45	24.76	328.07	276.12	389.31	619.08	456.40	420.93		419.11	473.39	462.05	395.31
9/11/06 7:00	24.76	328.08	276.12	389.33	619.08	456.41	420.92		419.12	473.39	462.05	395.31
9/11/06 7:15	24.76	328.07	276.12	389.33	619.08	456.41	420.92		419.11	473.38	462.05	395.31
9/11/06 7:30	24.77	328.08	276.12	389.33	619.08	456.41	420.92		419.11	473.37	462.05	395.32
9/11/06 7:45	24.77	328.08	276.13	389.35	619.08	456.42	420.92		419.12	473.37	462.06	395.33
9/11/06 8:00	24.77	328.08	276.13	389.35	619.08	456.41	420.92		419.11	473.37	462.05	395.33
9/11/06 8:15	24.77	328.08	276.13	389.36	619.08	456.41	420.92		419.11	473.36	462.05	395.34
9/11/06 8:30	24.77	328.08	276.13	389.36	619.08	456.41	420.92		419.11	473.36	462.06	395.34
9/11/06 8:45	24.77	328.08	276.13	389.38	619.07	456.41	420.92		419.11	473.35	462.05	395.34
9/11/06 9:00	24.77	328.08	276.14	389.38	619.08	456.41	420.92		419.11	473.35	462.05	395.35
9/11/06 9:15	24.76	328.09	276.14	389.39	619.08	456.41	420.92		419.11	473.35	462.06	395.35
9/11/06 9:30	24.77	328.09	276.13	389.39	619.07	456.41	420.93		419.12	473.34	462.06	395.36
9/11/06 9:45	24.77	328.10	276.15	389.39	619.08	456.41	420.92		419.11	473.34	462.06	395.36
9/11/06 10:00	24.78	328.10	276.15	389.41	619.07	456.41	420.93		419.11	473.34	462.06	395.36
9/11/06 10:15	24.78	328.10	276.15	389.43	619.08	456.42	420.93		419.12	473.33	462.06	395.37
9/11/06 10:30	24.78	328.10	276.17	389.43	619.08	456.42	420.93		419.11	473.33	462.06	395.38
9/11/06 10:45	24.78	328.11	276.15	389.44	619.09	456.42	420.93		419.13	473.33	462.07	395.38
9/11/06 11:00	24.78	328.11	276.16	389.44	619.09	456.42	420.93		419.12	473.33	462.06	395.40
9/11/06 11:15	24.78	328.12	276.17	389.44	619.09	456.42	420.93		419.12	473.33	462.06	395.40
9/11/06 11:30	24.78	328.12	276.17	389.44	619.09	456.42	420.93		419.12	473.33	462.08	395.40
9/11/06 11:45	24.78	328.12	276.17	389.46	619.09	456.43	420.93		419.14	473.33	462.07	395.40
9/11/06 12:00	24.78	328.13	276.17	389.48	619.09	456.43	420.93		419.13	473.33	462.08	395.42
9/11/06 12:15	24.77	328.13	276.18	389.48	619.10	456.43	420.94		419.11	473.33	462.08	395.42
9/11/06 12:30	24.77	328.13	276.17	389.48	619.09	456.43	420.94		419.13	473.33	462.08	395.42
9/11/06 12:45	24.77	328.13	276.19	389.49	619.10	456.43	420.94		419.13	473.34	462.09	395.43
9/11/06 13:00	24.77	328.14	276.18	389.51	619.10	456.43	420.94		419.13	473.34	462.09	395.44
9/11/06 13:15	24.77	328.14	276.19	389.51	619.10	456.43	420.94		419.13	473.34	462.09	395.45
9/11/06 13:30	24.77	328.14	276.19	389.51	619.10	456.43	420.94		419.14	473.34	462.09	395.44
9/11/06 13:45	24.76	328.14	276.19	389.53	619.10	456.43	420.94		419.12	473.34	462.09	395.45
9/11/06 14:00	24.76	328.14	276.21	389.53	619.10	456.43	420.94		419.13	473.34	462.08	395.45
9/11/06 14:15	24.76	328.15	276.20	389.54	619.10	456.44	420.95		419.15	473.34	462.09	395.46
9/11/06 14:30	24.76	328.15	276.20	389.54	619.10	456.44	420.95		419.13	473.35	462.08	395.47
9/11/06 14:45	24.76	328.15	276.21	389.56	619.10	456.44	420.95		419.14	473.35	462.08	395.48
9/11/06 15:00	24.75	328.15	276.21	389.58	619.10	456.43	420.95		419.13	473.35	462.08	395.48
9/11/06 15:15	24.74	328.16	276.20	389.56	619.09	456.43	420.95		419.13	473.35	462.09	395.47
9/11/06 15:30	24.74	328.16	276.20	389.56	619.10	456.43	420.94		419.13	473.35	462.09	395.48
9/11/06 15:45	24.73	328.16	276.21	389.58	619.10	456.43	420.94		419.12	473.35	462.09	395.49
9/11/06 16:00	24.73	328.16	276.21	389.58	619.10	456.43	420.95		419.13	473.35	462.09	395.49
9/11/06 16:15	24.73	328.16	276.21	389.58	619.10	456.43	420.94		419.13	473.35	462.09	395.50
9/11/06 16:30	24.73	328.16	276.21	389.59	619.10	456.43	420.94		419.14	473.35	462.09	395.49
9/11/06 16:45	24.74	328.16	276.21	389.59	619.10	456.43	420.94		419.13	473.35	462.09	395.50
9/11/06 17:00	24.74	328.16	276.22	389.59	619.09	456.43	420.94		419.12	473.35	462.08	395.50
9/11/06 17:15	24.74	328.16	276.21	389.61	619.09	456.42	420.94		419.12	473.35	462.08	395.51
9/11/06 17:30	24.75	328.17	276.22	389.61	619.09	456.42	420.94		419.12	473.34	462.07	395.50
9/11/06 17:45	24.75	328.17	276.22	389.63	619.09	456.42	420.94		419.12	473.34	462.07	395.52
9/11/06 18:00	24.75	328.17	276.22	389.63	619.09	456.42	420.94		419.12	473.34	462.07	395.52
9/11/06 18:15	24.76	328.17	276.22	389.64	619.09	456.42	420.93		419.12	473.34	462.06	395.53
9/11/06 18:30	24.77	328.17	276.22	389.64	619.09	456.42	420.93		419.12	473.34	462.08	395.53
9/11/06 18:45	24.77	328.17	276.22	389.66	619.09	456.42	420.93		419.11	473.33	462.08	395.53
9/11/06 19:00	24.78	328.17	276.22	389.66	619.09	456.42	420.93		419.11	473.33	462.07	395.54
9/11/06 19:15	24.78	328.18	276.22	389.68	619.09	456.42	420.93		419.11	473.33	462.07	395.54
9/11/06 19:30	24.78	328.18	276.22	389.68	619.09	456.42	420.93		419.11	473.33	462.07	395.54
9/11/06 19:45	24.79	328.18	276.23	389.69	619.09	456.42	420.93		419.11	473.33	462.07	395.55
9/11/06 20:00	24.80	328.18	276.23	389.69	619.08	475.99	420.93		419.11	473.32	462.07	395.55
9/11/06 20:15	24.81	328.19	276.24	389.69	619.09	475.99	420.93		419.12	473.32	462.07	395.56
9/11/06 20:30	24.82	328.19	276.24	389.71	619.09	475.99	420.93		419.12	473.32	462.08	395.57
9/11/06 20:45	24.82	328.20	276.25	389.73	619.09	475.99	420.94		419.12	473.31	462.09	395.57
9/11/06 21:00	24.83	328.20	276.25	389.74	619.09	475.99	420.94		419.13	473.31	462.08	395.58
9/11/06 21:15	24.84	328.20	276.26	389.74	619.09	475.99	420.94		419.13	473.38	462.08	395.59
9/11/06 21:30	24.84	328.21	276.26	389.76	619.10	475.99	420.94		419.13	473.38	462.09	395.60
9/11/06 21:45	24.84	328.21	276.27	389.76	619.10	475.99	420.94		419.13	473.38	462.09	395.60
9/11/06 22:00	24.85	328.21	276.27	389.77	619.10	475.99	420.95		419.13	473.39	462.09	395.60
9/11/06 22:15	24.84	328.22	276.27	389.77	619.10	475.99	420.95		419.13	473.39	462.09	395.61
9/11/06 22:30	24.85	328.22	276.28	389.79	619.10	475.99	420.95		419.13	473.39	462.10	395.61
9/11/06 22:45	24.84	328.23	276.28	389.79	619.10	475.99	420.94		419.13	473.39	462.09	395.62
9/11/06 23:00	24.85	328.23	276.28	389.79	619.11	475.99	420.95		419.14	473.40	462.10	395.64
9/11/06 23:15	24.84	328.23	276.28	389.81	619.11	475.99	420.95		419.14	473.40	462.10	395.64
9/11/06 23:30	24.84	328.23	276.29	389.82	619.11	475.99	420.95		419.14	473.40	462.10	395.64
9/11/06 23:45	24.84	328.24	276.29	389.82	619.11	475.99	420.95		419.14	473.40	462.11	395.65
9/12/06 0:00	24.84	328.24	276.30	389.82	619.11	475.99	420.95		419.14	473.41	462.11	395.65
9/12/06 0:15	24.84	328.25	276.30	389.84	619.11	475.99	420.96		419.15	473.41	462.11	395.65
9/12/06 0:30	24.84	328.25	276.31	389.86	619.11	475.99	420.96		419.15	473.42	462.11	395.67
9/12/06 0:45	24.84	328.25	276.31	389.86	619.11	475.99	420.96		419.15	473.42	462.11	395.67
9/12/06 1:00	24.84	328.26	276.31	389.87	619.12	475.99	420.96		419.15	473.42	462.12	395.68
9/12/06 1:15	24.84	328.26	276.32	389.87	619.12	475.99	420.96		419.15	473.42	462.12	395.69
9/12/06 1:30	24.84	328.27	276.32	389.89	619.13	475.99	420.97		419.16	473.42	462.12	395.70
9/12/06 1:45	24.84	328.27	276.33	389.91	619.13	475.99	420.97		419.16	473.43	462.12	395.70
9/12/06 2:00	24.83	328.27	276.32	389.91	619.13	475.99	420.97		419.16	473.43	462.12	395.71
9/12/06 2:15	24.83	328.28	276.34	389.91	619.13	475.99	420.97		419.16	473.43	462.12	395.71
9/12/06 2:30	24.83	328.28	276.34	389.92	619.13	475.99	420.97		419.16	473.44	462.12	395.71

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
9/12/06 2:45	24.83	328.28	276.34	389.94	619.13	475.99	420.97		419.16	473.44	462.12	395.72
9/12/06 3:00	24.83	328.28	276.34	389.94	619.13	475.99	420.97		419.16	473.44	462.12	395.73
9/12/06 3:15	24.83	328.29	276.35	389.94	619.13	475.99	420.98		419.16	473.44	462.13	395.73
9/12/06 3:30	24.83	328.29	276.35	389.96	619.13	475.99	420.98		419.16	473.44	462.13	395.73
9/12/06 3:45	24.83	328.30	276.35	389.96	619.13	475.99	420.98		419.16	473.44	462.13	395.74
9/12/06 4:00	24.83	328.30	276.35	389.96	619.13	475.99	420.98		419.16	473.44	462.13	395.74
9/12/06 4:15	24.83	328.30	276.36	389.97	619.13	475.99	420.98		419.16	473.44	462.13	395.75
9/12/06 4:30	24.83	328.30	276.36	389.97	619.13	475.99	420.98		419.16	473.45	462.13	395.75
9/12/06 4:45	24.83	328.30	276.36	389.99	619.13	475.99	420.98		419.16	473.45	462.13	395.75
9/12/06 5:00	24.82	328.30	276.36	389.99	619.13	475.99	420.98		419.16	473.44	462.13	395.76
9/12/06 5:15	24.83	328.30	276.36	389.99	619.13	475.99	420.97		419.16	473.44	462.13	395.77
9/12/06 5:30	24.82	328.30	276.36	390.01	619.13	475.99	420.97		419.16	473.44	462.13	395.77
9/12/06 5:45	24.82	328.30	276.38	390.01	619.12	475.99	420.97		419.16	473.44	462.13	395.77
9/12/06 6:00	24.82	328.31	276.36	390.01	619.12	475.99	420.97		419.15	473.44	462.13	395.77
9/12/06 6:15	24.82	328.31	276.37	390.02	619.12	475.99	420.97		419.15	473.44	462.12	395.78
9/12/06 6:30	24.82	328.31	276.36	390.02	619.12	475.99	420.97		419.15	473.43	462.12	395.79
9/12/06 6:45	24.82	328.31	276.36	390.02	619.12	475.99	420.96		419.15	473.43	462.12	395.79
9/12/06 7:00	24.82	328.31	276.37	390.04	619.12	475.99	420.96		419.15	473.43	462.12	395.79
9/12/06 7:15	24.82	328.31	276.37	390.04	619.11	475.99	420.96		419.15	473.43	462.12	395.79
9/12/06 7:30	24.82	328.31	276.37	390.04	619.11	475.99	420.96		419.14	473.43	462.12	395.79
9/12/06 7:45	24.82	328.31	276.37	390.06	619.11	475.99	420.96		419.14	473.42	462.12	395.79
9/12/06 8:00	24.82	328.32	276.38	390.06	619.11	475.99	420.96		419.14	473.42	462.12	395.80
9/12/06 8:15	24.82	328.32	276.38	390.07	619.11	475.99	420.96		419.14	473.41	462.12	395.80
9/12/06 8:30	24.81	328.32	276.37	390.07	619.11	475.99	420.95		419.14	473.41	462.12	395.81
9/12/06 8:45	24.80	328.32	276.37	390.07	619.11	475.99	420.95		419.14	473.41	462.11	395.80
9/12/06 9:00	24.79	328.32	276.37	390.07	619.11	475.99	420.95		419.13	473.41	462.11	395.81
9/12/06 9:15	24.78	328.32	276.37	390.09	619.10	475.99	420.95		419.13	473.41	462.11	395.81
9/12/06 9:30	24.78	328.32	276.38	390.09	619.11	475.99	420.95		419.13	473.41	462.12	395.81
9/12/06 9:45	24.78	328.32	276.38	390.09	619.10	475.99	420.95		419.14	473.41	462.12	395.82
9/12/06 10:00	24.77	328.32	276.37	390.09	619.10	475.99	420.95		419.14	473.41	462.11	395.82
9/12/06 10:15	24.77	328.32	276.38	390.10	619.10	475.99	420.94		419.13	473.41	462.12	395.83
9/12/06 10:30	24.76	328.32	276.38	390.12	619.10	475.99	420.94		419.13	473.41	462.11	395.83
9/12/06 10:45	24.76	328.32	276.38	390.12	619.10	475.99	420.95		419.13	473.40	462.12	395.83
9/12/06 11:00	24.75	328.32	276.39	390.12	619.10	475.99	420.95		419.13	473.40	462.11	395.84
9/12/06 11:15	24.75	328.32	276.38	390.12	619.10	475.99	420.94		419.13	473.41	462.10	395.84
9/12/06 11:30	24.74	328.32	276.38	390.12	619.10	475.99	420.94		419.12	473.41	462.11	395.84
9/12/06 11:45	24.74	328.32	276.38	390.12	619.09	475.99	420.93		419.12	473.41	462.11	395.84
9/12/06 12:00	24.73	328.33	276.39	390.14	619.09	475.99	420.94		419.12	473.41	462.11	395.85
9/12/06 12:15	24.73	328.33	276.39	390.14	619.09	475.99	420.94		419.12	473.41	462.11	395.85
9/12/06 12:30	24.71	328.33	276.39	390.14	619.09	475.99	420.93		419.12	473.42	462.09	395.86
9/12/06 12:45	24.71	328.33	276.39	390.15	619.09	475.99	420.93		419.12	473.42	462.10	395.86
9/12/06 13:00	24.71	328.33	276.39	390.15	619.09	475.99	420.93		419.12	473.42	462.09	395.86
9/12/06 13:15	24.71	328.33	276.39	390.15	619.09	475.99	420.94		419.11	473.42	462.10	395.87
9/12/06 13:30	24.71	328.34	276.39	390.17	619.09	475.99	420.95		419.12	473.43	462.10	395.87
9/12/06 13:45	24.70	328.33	276.39	390.17	619.09	475.99	420.94		419.12	473.43	462.10	395.88
9/12/06 14:00	24.69	328.33	276.39	390.17	619.09	475.99	420.94		419.11	473.43	462.10	395.89
9/12/06 14:15	24.69	328.34	276.39	390.17	619.09	475.99	420.94		419.11	473.43	462.09	395.88
9/12/06 14:30	24.68	328.34	276.40	390.17	619.09	475.99	420.94		419.11	473.43	462.09	395.89
9/12/06 14:45	24.68	328.34	276.40	390.19	619.09	475.99	420.94		419.11	473.44	462.09	395.89
9/12/06 15:00	24.67	328.34	276.39	390.19	619.09	475.99	420.94		419.11	473.44	462.09	395.89
9/12/06 15:15	24.67	328.34	276.40	390.20	619.08	475.99	420.94		419.11	473.44	462.09	395.89
9/12/06 15:30	24.67	328.34	276.40	390.20	619.08	475.99	420.93		419.11	473.44	462.09	395.89
9/12/06 15:45	24.67	328.34	276.40	390.20	619.08	455.06	420.93		419.10	473.44	462.09	395.90
9/12/06 16:00	24.67	328.34	276.40	390.22	619.08	455.08	420.93		419.11	473.45	462.09	395.90
9/12/06 16:15	24.67	328.34	276.40	390.22	619.08	455.09	420.93		419.10	473.45	462.09	395.91
9/12/06 16:30	24.66	328.34	276.41	390.22	619.08	455.08	420.93		419.10	473.45	462.09	395.90
9/12/06 16:45	24.67	328.34	276.41	390.24	619.08	455.08	420.93		419.09	473.45	462.09	395.92
9/12/06 17:00	24.66	328.34	276.40	390.24	619.07	455.08	420.93		419.10	473.45	462.09	395.91
9/12/06 17:15	24.67	328.35	276.41	390.24	619.08	455.08	420.93		419.10	473.45	462.09	395.92
9/12/06 17:30	24.67	328.35	276.41	390.24	619.07	455.08	420.92		419.09	473.45	462.09	395.93
9/12/06 17:45	24.67	328.35	276.41	390.25	619.07	455.07	420.92		419.10	473.45	462.09	395.92
9/12/06 18:00	24.68	328.35	276.41	390.25	619.07	455.08	420.92		419.09	473.45	462.09	395.94
9/12/06 18:15	24.68	328.35	276.41	390.27	619.07	455.07	420.92		419.09	473.45	462.09	395.94
9/12/06 18:30	24.69	328.35	276.41	390.27	619.07	455.07	420.92		419.09	473.45	462.09	395.94
9/12/06 18:45	24.69	328.35	276.41	390.27	619.07	455.07	420.92		419.09	473.45	462.08	395.94
9/12/06 19:00	24.70	328.35	276.41	390.27	619.07	455.07	420.92		419.09	473.45	462.07	395.94
9/12/06 19:15	24.70	328.36	276.42	390.29	619.07	455.06	420.92		419.09	473.44	462.08	395.94
9/12/06 19:30	24.71	328.36	276.41	390.30	619.06	455.06	420.92		419.09	473.45	462.08	395.95
9/12/06 19:45	24.71	328.36	276.42	390.30	619.06	455.06	420.92		419.08	473.45	462.07	395.95
9/12/06 20:00	24.72	328.36	276.42	390.30	619.06	455.06	420.92		419.08	473.44	462.08	395.95
9/12/06 20:15	24.72	328.36	276.42	390.32	619.06	455.06	420.92		419.09	473.44	462.08	395.96
9/12/06 20:30	24.73	328.37	276.43	390.32	619.06	455.06	420.92		419.09	473.44	462.08	395.97
9/12/06 20:45	24.73	328.37	276.43	390.34	619.06	455.06	420.91		419.09	473.44	462.07	395.98
9/12/06 21:00	24.73	328.37	276.43	390.34	619.06	455.06	420.92		419.09	473.44	462.08	395.98
9/12/06 21:15	24.74	328.37	276.44	390.34	619.06	455.06	420.92		419.09	473.44	462.08	395.99
9/12/06 21:30	24.74	328.37	276.44	390.35	619.06	455.06	420.92		419.09	473.44	462.07	395.99
9/12/06 21:45	24.73	328.38	276.44	390.35	619.06	455.06	420.92		419.09	473.44	462.08	395.99
9/12/06 22:00	24.73	328.38	276.45	390.35	619.06	455.06	420.92		419.09	473.45	462.09	395.99
9/12/06 22:15	24.74	328.39	276.45	390.37	619.06	455.06	420.92		419.09	473.45	462.08	396.00
9/12/06 22:30	24.73	328.39	276.45	390.39	619.06	455.06	420.92		419.09	473.45	462.08	396.01
9/12/06 22:45	24.73	328.39	276.45	390.37	619.06	455.06	420.92		419.09	473.46	462.08	396.01
9/12/06 23:00	24.73	328.39	276.45	390.39	619.06	455.06	420.92		419.09	473.46	462.08	396.00
9/12/06 23:15	24.72	328.39	276.45	390.39	619.06	455.06	420.92		419.09	473.46	462.08	396.01
9/12/06 23:30	24.72	328.39	276.46	390.40	619.06	455.06	420.92		419.09	473.47	462.08	396.02
9/12/06 23:45	24.72	328.40	276.46	390.40	619.06	455.06	420.92		419.09	473.47	462.08	396.03
9/13/06 0:00	24.72	328.40	276.46	390.42	619.06	455.06	420.92		419.09	473.47	462.08	396.02
9/13/06 0:15	24.72	328.40	276.47	390.42	619.06	455.06	420.92		419.09	473.48	462.08	396.04
9/13/06 0:30	24.72	328.41	276.47	390.44	619.06	455.06	420.92		419.09	473.48	462.08	396.04
9/13/06 0:45	24.71	328.41	276.47	390.44	619.06	455.06	420.92		419.09	473.48	462.09	396.04
9/13/06 1:00	24.71	328.41	276.48	390.44	619.06	455.06	420.92		419.09	473.49	462.09	396.05
9/13/06 1:15	24.71	328.41	276.48	390.45	619.06	455.06	420.92		419.09	473.49	462.09	396.04
9/13/06 1:30	24.71	328.41	276.49	390.45	619.07	455.06	420.92		419.09	473.49	462.09	396.06
9/13/06 1:45	24.71	328.42	276.49	390.47	619.07	455.06	420.93		419.09	473.49	462.09	396.07
9/13/06 2:00	24.70	328.42	276.49	390.47	619.07	455.06	420.93		419.09	473.50	462.09	396.07
9/13/06 2:15	24.70	328.42	276.49	390.48	619.07	455.06	420.93		419.09	473.50	462.09	396.08
9/13/06 2:30	24.70	328.43	276.49	390.48	619.07	455.06	420.93		419.09	473.51	462.10	396.07
9/13/06 2:45	24.69	328.43	276.50	390.48	619.07	455.06	420.93		419.09	473.51	462.10	396.09
9/13/06 3:00	24.69	328.43	276.50	390.50	619.07	455.06	420.93		419.10	473.52	462.10	396.09
9/13/06 3:15	24.68	328.43	276.50	390.50	619.07	455.06	420.93		419.09	473.52	462.10	396.09
9/13/06 3:30	24.68	328.43	276.50	390.50	619.07	455.06	420.93		419.09	473.53	462.09	396.09

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
9/13/06 3:45	24.67	328.43	276.51	390.52	619.07	455.06	420.93		419.09	473.53	462.09	396.10
9/13/06 4:00	24.67	328.44	276.51	390.52	619.07	455.06	420.93		419.09	473.53	462.09	396.10
9/13/06 4:15	24.67	328.44	276.51	390.52	619.07	455.06	420.93		419.09	473.52	462.09	396.10
9/13/06 4:30	24.66	328.45	276.51	390.53	619.07	455.06	420.93		419.09	473.52	462.09	396.11
9/13/06 4:45	24.67	328.45	276.51	390.53	619.07	455.06	420.93		419.09	473.52	462.09	396.12
9/13/06 5:00	24.66	328.45	276.52	390.53	619.07	455.05	420.92		419.09	473.52	462.09	396.11
9/13/06 5:15	24.66	328.45	276.52	390.55	619.06	455.05	420.93		419.09	473.52	462.09	396.13
9/13/06 5:30	24.66	328.45	276.52	390.55	619.06	455.05	420.92		419.09	473.52	462.09	396.13
9/13/06 5:45	24.66	328.45	276.52	390.55	619.06	455.05	420.92		419.09	473.53	462.09	396.12
9/13/06 6:00	24.66	328.45	276.52	390.57	619.06	455.05	420.92		419.09	473.52	462.09	396.13
9/13/06 6:15	24.65	328.46	276.52	390.57	619.06	455.05	420.92		419.08	473.51	462.09	396.13
9/13/06 6:30	24.65	328.46	276.52	390.57	619.05	455.05	420.92		419.08	473.50	462.09	396.14
9/13/06 6:45	24.65	328.46	276.53	390.58	619.06	455.05	420.92		419.08	473.50	462.09	396.14
9/13/06 7:00	24.65	328.46	276.53	390.58	619.05	455.05	420.92		419.08	473.50	462.09	396.14
9/13/06 7:15	24.65	328.46	276.53	390.58	619.05	455.04	420.92		419.08	473.50	462.09	396.15
9/13/06 7:30	24.65	328.46	276.53	390.58	619.05	455.04	420.92		419.08	473.50	462.09	396.15
9/13/06 7:45	24.64	328.46	276.53	390.60	619.05	455.04	420.91		419.08	473.50	462.08	396.15
9/13/06 8:00	24.64	328.46	276.53	390.60	619.05	455.04	420.91		419.08	473.50	462.09	396.16
9/13/06 8:15	24.63	328.46	276.53	390.60	619.05	455.04	420.91		419.07	473.50	462.09	396.16
9/13/06 8:30	24.62	328.46	276.53	390.60	619.05	455.03	420.91		419.07	473.50	462.08	396.16
9/13/06 8:45	24.61	328.46	276.53	390.60	619.04	455.03	420.90		419.07	473.50	462.08	396.16
9/13/06 9:00	24.60	328.46	276.53	390.60	619.03	455.03	420.90		419.07	473.49	462.09	396.17
9/13/06 9:15	24.59	328.46	276.53	390.65	619.04	455.02	420.90		419.06	473.49	462.08	396.17
9/13/06 9:30	24.58	328.46	276.53	390.63	619.03	455.02	420.90		419.06	473.49	462.07	396.17
9/13/06 9:45	24.56	328.46	276.53	390.63	619.03	455.02	420.90		419.06	473.49	462.08	396.17
9/13/06 10:00	24.55	328.45	276.53	390.63	619.03	455.02	420.89		419.06	473.49	462.06	396.17
9/13/06 10:15	24.55	328.46	276.53	390.63	619.03	455.01	420.89		419.06	473.48	462.07	396.17
9/13/06 10:30	24.54	328.46	276.53	390.63	619.03	455.01	420.89		419.05	473.48	462.07	396.18
9/13/06 10:45	24.53	328.46	276.53	390.63	619.03	455.01	420.88		419.05	473.48	462.06	396.18
9/13/06 11:00	24.53	328.45	276.53	390.63	619.02	455.00	420.88		419.05	473.45	462.06	396.17
9/13/06 11:15	24.51	328.46	276.53	390.65	619.01	455.00	420.87		419.04	473.46	462.06	396.18
9/13/06 11:30	24.50	328.45	276.53	390.63	619.01	454.99	420.87		419.04	473.46	462.06	396.18
9/13/06 11:45	24.50	328.45	276.52	390.63	619.01	454.99	420.87		419.04	473.46	462.06	396.18
9/13/06 12:00	24.49	328.45	276.51	390.63	619.01	454.99	420.87		419.03	473.47	462.06	396.18
9/13/06 12:15	24.48	328.45	276.51	390.65	619.00	454.98	420.87		419.03	473.44	462.04	396.18
9/13/06 12:30	24.47	328.45	276.51	390.65	619.00	454.98	420.86		419.03	473.44	462.04	396.18
9/13/06 12:45	24.46	328.44	276.51	390.65	618.99	454.97	420.85		419.02	473.45	462.04	396.18
9/13/06 13:00	24.45	328.45	276.51	390.65	618.99	454.97	420.85		419.02	473.45	462.04	396.18
9/13/06 13:15	24.45	328.44	276.52	390.65	618.99	454.97	420.85		419.02	473.45	462.04	396.18
9/13/06 13:30	24.44	328.44	276.51	390.65	618.99	454.97	420.85		419.01	473.45	462.04	396.18
9/13/06 13:45	24.43	328.44	276.51	390.65	618.99	454.97	420.85		419.01	473.41	462.04	396.19
9/13/06 14:00	24.43	328.44	276.51	390.67	618.98	454.96	420.84		419.00	473.41	462.04	396.19
9/13/06 14:15	24.42	328.44	276.51	390.67	618.98	454.96	420.84		419.01	473.42	462.03	396.18
9/13/06 14:30	24.41	328.44	276.51	390.67	618.97	454.95	420.84		418.99	473.42	462.02	396.19
9/13/06 14:45	24.41	328.44	276.51	390.67	618.97	454.96	420.84		419.00	473.42	462.02	396.19
9/13/06 15:00	24.40	328.44	276.50	390.67	618.97	454.95	420.83		419.00	473.43	462.02	396.19
9/13/06 15:15	24.39	328.44	276.51	390.67	618.97	454.94	420.83		418.99	473.43	462.01	396.19
9/13/06 15:30	24.39	328.44	276.50	390.67	618.97	454.94	420.82		418.99	473.40	462.01	396.19
9/13/06 15:45	24.38	328.43	276.51	390.68	618.96	454.94	420.82		418.99	473.40	462.01	396.20
9/13/06 16:00	24.37	328.43	276.50	390.67	618.95	454.93	420.82		418.99	473.40	462.01	396.19
9/13/06 16:15	24.37	328.43	276.50	390.68	618.95	454.93	420.82		418.98	473.40	462.00	396.18
9/13/06 16:30	24.37	328.43	276.50	390.68	618.96	454.93	420.81		418.99	473.41	462.00	396.20
9/13/06 16:45	24.37	328.43	276.50	390.68	618.95	454.92	420.82		418.98	473.41	462.00	396.21
9/13/06 17:00	24.37	328.43	276.50	390.68	618.95	454.92	420.81		418.97	473.41	462.00	396.21
9/13/06 17:15	24.37	328.43	276.51	390.70	618.95	454.91	420.81		418.97	473.41	461.99	396.21
9/13/06 17:30	24.36	328.43	276.50	390.70	618.95	454.91	420.81		418.97	473.42	461.99	396.21
9/13/06 17:45	24.36	328.43	276.50	390.72	618.94	454.91	420.81		418.97	473.42	461.98	396.22
9/13/06 18:00	24.36	328.43	276.50	390.72	618.94	454.91	420.80		418.97	473.42	461.99	396.21
9/13/06 18:15	24.36	328.43	276.50	390.72	618.94	454.91	420.80		418.97	473.37	461.99	396.22
9/13/06 18:30	24.36	328.43	276.51	390.72	618.94	454.91	420.80		418.96	473.37	461.99	396.21
9/13/06 18:45	24.36	328.43	276.51	390.72	618.93	454.90	420.80		418.96	473.37	461.98	396.23
9/13/06 19:00	24.36	328.43	276.51	390.73	618.93	454.91	420.80		418.96	473.37	461.98	396.23
9/13/06 19:15	24.37	328.43	276.51	390.73	618.93	454.90	420.80		418.96	473.37	461.98	396.23
9/13/06 19:30	24.37	328.44	276.51	390.75	618.93	454.90	420.80		418.96	473.37	461.98	396.23
9/13/06 19:45	24.37	328.44	276.51	390.75	618.93	454.90	420.79		418.96	473.37	461.98	396.24
9/13/06 20:00	24.37	328.44	276.52	390.75	618.93	454.90	420.79		418.95	473.38	461.98	396.23
9/13/06 20:15	24.38	328.44	276.52	390.75	618.93	454.90	420.79		418.96	473.37	461.99	396.24
9/13/06 20:30	24.38	328.44	276.52	390.77	618.93	454.90	420.79		418.95	473.37	461.98	396.25
9/13/06 20:45	24.38	328.45	276.53	390.77	618.93	454.90	420.79		418.95	473.37	461.98	396.25
9/13/06 21:00	24.39	328.45	276.53	390.78	618.93	454.90	420.79		418.95	473.37	461.98	396.26
9/13/06 21:15	24.39	328.46	276.53	390.78	618.93	454.90	420.79		418.96	473.37	461.98	396.26
9/13/06 21:30	24.39	328.46	276.53	390.80	618.93	454.90	420.79		418.96	473.38	461.99	396.27
9/13/06 21:45	24.39	328.46	276.53	390.80	618.93	454.90	420.79		418.95	473.38	461.98	396.27
9/13/06 22:00	24.39	328.46	276.54	390.80	618.93	454.90	420.79		418.95	473.38	461.98	396.28
9/13/06 22:15	24.39	328.46	276.54	390.80	618.93	454.90	420.79		418.95	473.38	461.98	396.28
9/13/06 22:30	24.39	328.46	276.54	390.81	618.93	454.89	420.79		418.95	473.38	461.98	396.28
9/13/06 22:45	24.39	328.47	276.54	390.81	618.93	454.89	420.79		418.95	473.38	461.98	396.28
9/13/06 23:00	24.39	328.47	276.55	390.81	618.93	454.90	420.79		418.96	473.38	461.98	396.29
9/13/06 23:15	24.38	328.47	276.55	390.83	618.93	454.90	420.79		418.95	473.39	461.98	396.29
9/13/06 23:30	24.39	328.48	276.55	390.83	618.93	454.90	420.79		418.95	473.39	461.98	396.30
9/13/06 23:45	24.38	328.48	276.55	390.85	618.93	454.90	420.79		418.95	473.39	461.98	396.31
9/14/06 0:00	24.39	328.48	276.56	390.85	618.93	454.90	420.80		418.96	473.39	461.99	396.31
9/14/06 0:15	24.39	328.48	276.56	390.85	618.93	454.90	420.80		418.96	473.39	461.99	396.31
9/14/06 0:30	24.39	328.49	276.57	390.86	618.93	454.90	420.80		418.96	473.39	461.99	396.32
9/14/06 0:45	24.39	328.49	276.57	390.86	618.93	454.90	420.80		418.96	473.39	462.00	396.33
9/14/06 1:00	24.39	328.50	276.58	390.86	618.93	454.90	420.80		418.96	473.40	462.00	396.33
9/14/06 1:15	24.39	328.50	276.58	390.88	618.93	454.90	420.80		418.96	473.40	462.00	396.33
9/14/06 1:30	24.39	328.50	276.58	390.90	618.94	454.90	420.80		418.96	473.40	462.00	396.34
9/14/06 1:45	24.39	328.50	276.58	390.90	618.94	454.91	420.80		418.96	473.40	462.00	396.35
9/14/06 2:00	24.39	328.51	276.59	390.90	618.94	454.91	420.81		418.97	473.40	462.01	396.35
9/14/06 2:15	24.39	328.51	276.59	390.91	618.94	454.91	420.81		418.97	473.40	462.01	396.36
9/14/06 2:30	24.39	328.52	276.60	390.91	618.94	454.91	420.81		418.97	473.40	462.01	396.37
9/14/06 2:45	24.40	328.52	276.60	390.93	618.94	454.91	420.81		418.97	473.40	462.01	396.37
9/14/06 3:00	24.39	328.52	276.61	390.93	618.95	454.92	420.81		418.97	473.41	462.01	396.38
9/14/06 3:15	24.39	328.53	276.60	390.95	618.95	454.91	420.81		418.97	473.41	462.01	396.38
9/14/06 3:30	24.39	328.53	276.61	390.95	618.95	454.91	420.81		418.97	473.41	462.01	396.38
9/14/06 3:45	24.40	328.54	276.62	390.95	618.95	454.92	420.82		418.98	473.41	462.02	396.39
9/14/06 4:00	24.39	328.54	276.63	390.96	618.95	454.92	420.82		418.98	473.42	462.03	396.40
9/14/06 4:15	24.39	328.54	276.63	390.96	618.95	454.92	420.82		418.98	473.42	462.03	396.40
9/14/06 4:30	24.39	328.55	276.63	390.98	618.95	454.92	420.82		418.98	473.42	462.03	396.41

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
9/14/06 4:45	24.39	328.55	276.63	390.98	618.95	454.92	420.82		418.98	473.42	462.03	396.41
9/14/06 5:00	24.38	328.55	276.63	390.98	618.95	454.92	420.82		418.98	473.42	462.03	396.42
9/14/06 5:15	24.38	328.55	276.64	391.00	618.95	454.92	420.82		418.98	473.42	462.03	396.42
9/14/06 5:30	24.38	328.55	276.64	391.00	618.95	454.92	420.82		418.98	473.42	462.03	396.43
9/14/06 5:45	24.39	328.56	276.64	391.00	618.95	454.92	420.82		418.98	473.42	462.04	396.43
9/14/06 6:00	24.38	328.56	276.64	391.01	618.95	454.92	420.82		418.98	473.42	462.04	396.43
9/14/06 6:15	24.38	328.57	276.65	391.01	618.95	454.92	420.82		418.98	473.42	462.03	396.43
9/14/06 6:30	24.38	328.57	276.65	391.03	618.95	454.92	420.82		418.98	473.42	462.04	396.44
9/14/06 6:45	24.38	328.57	276.65	391.03	618.95	454.92	420.82		418.98	473.43	462.04	396.45
9/14/06 7:00	24.38	328.57	276.66	391.03	618.95	454.92	420.82		418.98	473.43	462.04	396.45
9/14/06 7:15	24.38	328.57	276.66	391.05	618.95	454.92	420.82		418.98	473.42	462.04	396.46
9/14/06 7:30	24.38	328.58	276.66	391.05	618.95	454.92	420.82		418.98	473.42	462.04	396.46
9/14/06 7:45	24.38	328.58	276.66	391.05	618.95	454.93	420.83		418.98	473.42	462.04	396.47
9/14/06 8:00	24.38	328.58	276.67	391.05	618.96	454.93	420.83		418.98	473.42	462.04	396.47
9/14/06 8:15	24.38	328.59	276.67	391.06	618.95	454.93	420.83		418.98	473.41	462.04	396.48
9/14/06 8:30	24.38	328.59	276.67	391.06	618.95	454.92	420.83		418.98	473.41	462.04	396.48
9/14/06 8:45	24.37	328.59	276.68	391.11	618.95	454.92	420.83		418.98	473.41	462.04	396.48
9/14/06 9:00	24.36	328.59	276.67	391.10	618.95	454.92	420.82		418.98	473.42	462.04	396.48
9/14/06 9:15	24.36	328.59	276.68	391.10	618.95	454.92	420.82		418.98	473.42	462.04	396.49
9/14/06 9:30	24.35	328.59	276.68	391.10	618.95	454.92	420.82		418.97	473.42	462.04	396.49
9/14/06 9:45	24.35	328.59	276.67	391.10	618.94	454.91	420.82		418.97	473.42	462.04	396.49
9/14/06 10:00	24.34	328.59	276.68	391.10	618.95	454.91	420.82		418.97	473.37	462.04	396.49
9/14/06 10:15	24.34	328.59	276.68	391.10	618.94	454.91	420.82		418.97	473.37	462.04	396.49
9/14/06 10:30	24.34	328.59	276.68	391.10	618.94	454.91	420.82		418.97	473.37	462.04	396.50
9/14/06 10:45	24.33	328.59	276.68	391.11	618.94	454.90	420.80		418.97	473.37	462.03	396.49
9/14/06 11:00	24.33	328.59	276.68	391.11	618.94	454.91	420.81		418.97	473.37	462.02	396.50
9/14/06 11:15	24.32	328.59	276.68	391.11	618.94	454.91	420.81		418.97	473.37	462.03	396.51
9/14/06 11:30	24.32	328.59	276.68	391.11	618.94	454.90	420.80		418.96	473.37	462.02	396.51
9/14/06 11:45	24.32	328.59	276.68	391.11	618.94	454.89	420.80		418.96	473.38	462.03	396.51
9/14/06 12:00	24.31	328.59	276.68	391.11	618.93	454.89	420.80		418.95	473.38	462.02	396.51
9/14/06 12:15	24.30	328.59	276.68	391.13	618.93	454.89	420.80		418.96	473.38	462.03	396.51
9/14/06 12:30	24.30	328.59	276.68	391.13	618.93	454.89	420.80		418.95	473.38	462.01	396.51
9/14/06 12:45	24.29	328.59	276.68	391.13	618.92	454.88	420.79		418.94	473.38	462.01	396.52
9/14/06 13:00	24.28	328.59	276.68	391.13	618.92	454.88	420.79		418.95	473.37	462.01	396.51
9/14/06 13:15	24.28	328.59	276.69	391.13	618.91	454.88	420.79		418.94	473.38	462.01	396.52
9/14/06 13:30	24.27	328.59	276.68	391.13	618.91	454.88	420.79		418.93	473.38	462.01	396.52
9/14/06 13:45	24.26	328.59	276.68	391.14	618.91	454.87	420.78		418.93	473.34	462.01	396.52
9/14/06 14:00	24.25	328.59	276.68	391.14	618.91	454.88	420.78		418.94	473.34	462.01	396.52
9/14/06 14:15	24.25	328.59	276.68	391.14	618.91	454.87	420.78		418.93	473.34	462.00	396.52
9/14/06 14:30	24.24	328.59	276.67	391.14	618.91	454.87	420.78		418.93	473.35	462.00	396.52
9/14/06 14:45	24.24	328.59	276.67	391.14	618.91	454.86	420.77		418.93	473.35	462.00	396.52
9/14/06 15:00	24.23	328.59	276.69	391.14	618.90	454.86	420.77		418.92	473.35	462.00	396.52
9/14/06 15:15	24.22	328.59	276.67	391.14	618.90	454.86	420.77		418.93	473.35	462.00	396.52
9/14/06 15:30	24.21	328.59	276.68	391.14	618.90	454.85	420.77		418.91	473.35	461.99	396.53
9/14/06 15:45	24.21	328.59	276.68	391.16	618.90	454.85	420.77		418.91	473.35	461.99	396.53
9/14/06 16:00	24.21	328.59	276.68	391.16	618.90	454.85	420.77		418.91	473.35	461.99	396.53
9/14/06 16:15	24.21	328.59	276.68	391.16	618.89	454.85	420.76		418.91	473.35	461.98	396.54
9/14/06 16:30	24.21	328.59	276.68	391.16	618.89	454.85	420.76		418.91	473.35	461.98	396.53
9/14/06 16:45	24.21	328.59	276.68	391.18	618.89	454.85	420.76		418.91	473.35	461.98	396.54
9/14/06 17:00	24.22	328.59	276.68	391.18	618.89	454.84	420.76		418.91	473.35	461.98	396.55
9/14/06 17:15	24.22	328.59	276.69	391.18	618.89	454.85	420.76		418.91	473.35	461.98	396.55
9/14/06 17:30	24.23	328.60	276.68	391.18	618.89	454.84	420.76		418.91	473.35	461.98	396.56
9/14/06 17:45	24.27	328.60	276.69	391.19	618.88	454.84	420.75		418.91	473.33	462.00	396.56
9/14/06 18:00	24.29	328.62	276.72	391.21	618.88	454.86	420.76		418.91	473.31	462.00	396.57
9/14/06 18:15	24.31	328.63	276.73	391.23	618.90	454.87	420.78		418.93	473.31	462.01	396.57
9/14/06 18:30	24.30	328.63	276.73	391.24	618.89	454.88	420.78		418.93	473.32	462.00	396.60
9/14/06 18:45	24.30	328.63	276.73	391.23	618.90	454.86	420.78		418.93	473.32	462.00	396.59
9/14/06 19:00	24.29	328.63	276.72	391.24	618.90	454.87	420.78		418.93	473.35	461.99	396.59
9/14/06 19:15	24.26	328.61	276.70	391.23	618.88	454.84	420.76		418.90	473.35	461.98	396.59
9/14/06 19:30	24.26	328.61	276.70	391.23	618.89	454.84	420.76		418.90	473.35	461.98	396.58
9/14/06 19:45	24.26	328.61	276.70	391.24	618.89	454.84	420.75		418.90	473.35	461.98	396.58
9/14/06 20:00	24.26	328.62	276.71	391.24	618.89	454.84	420.75		418.91	473.35	461.98	396.59
9/14/06 20:15	24.26	328.62	276.71	391.24	618.89	454.84	420.76		418.90	473.35	461.98	396.59
9/14/06 20:30	24.29	328.63	276.73	391.26	618.89	454.85	420.76		418.91	473.33	461.98	396.60
9/14/06 20:45	24.30	328.64	276.74	391.26	618.89	454.85	420.76		418.91	473.33	462.00	396.62
9/14/06 21:00	24.30	328.64	276.74	391.28	618.89	454.86	420.77		418.91	473.33	462.00	396.62
9/14/06 21:15	24.29	328.64	276.74	391.29	618.89	454.86	420.77		418.92	473.33	462.00	396.63
9/14/06 21:30	24.28	328.64	276.74	391.29	618.89	454.85	420.77		418.92	473.34	461.99	396.63
9/14/06 21:45	24.29	328.65	276.74	391.29	618.89	454.85	420.77		418.91	473.34	462.01	396.63
9/14/06 22:00	24.27	328.65	276.74	391.29	618.89	454.85	420.77		418.91	473.35	462.00	396.63
9/14/06 22:15	24.26	328.64	276.73	391.29	618.88	454.84	420.76		418.91	473.35	461.99	396.63
9/14/06 22:30	24.26	328.64	276.74	391.29	618.89	454.84	420.76		418.91	473.36	461.99	396.63
9/14/06 22:45	24.25	328.64	276.73	391.31	618.88	454.84	420.76		418.90	473.28	461.98	396.64
9/14/06 23:00	24.26	328.65	276.74	391.31	618.88	454.84	420.76		418.90	473.27	461.99	396.63
9/14/06 23:15	24.26	328.65	276.75	391.31	618.88	454.84	420.76		418.90	473.28	461.99	396.64
9/14/06 23:30	24.26	328.65	276.75	391.33	618.88	454.84	420.76		418.90	473.28	461.99	396.64
9/14/06 23:45	24.25	328.65	276.75	391.33	618.88	454.84	420.76		418.91	473.29	461.99	396.65
9/15/06 0:00	24.24	328.65	276.75	391.33	618.88	454.83	420.75		418.90	473.29	461.98	396.65
9/15/06 0:15	24.24	328.65	276.75	391.33	618.88	454.83	420.75		418.90	473.30	461.98	396.66
9/15/06 0:30	24.24	328.65	276.75	391.33	618.88	454.83	420.75		418.90	473.29	461.98	396.66
9/15/06 0:45	24.25	328.66	276.77	391.34	618.88	454.83	420.75		418.90	473.30	461.99	396.66
9/15/06 1:00	24.24	328.66	276.76	391.34	618.88	454.83	420.75		418.90	473.30	461.99	396.67
9/15/06 1:15	24.24	328.66	276.76	391.34	618.88	454.83	420.75		418.90	473.30	461.99	396.67
9/15/06 1:30	24.24	328.66	276.77	391.36	618.88	454.83	420.75		418.90	473.30	461.99	396.67
9/15/06 1:45	24.25	328.67	276.77	391.36	618.88	454.83	420.76		418.91	473.30	462.00	396.68
9/15/06 2:00	24.24	328.67	276.77	391.38	618.88	454.83	420.76		418.91	473.30	462.00	396.69
9/15/06 2:15	24.24	328.68	276.78	391.38	618.88	454.83	420.75		418.91	473.30	462.00	396.68
9/15/06 2:30	24.24	328.68	276.78	391.38	618.88	454.83	420.76		418.91	473.30	462.00	396.69
9/15/06 2:45	24.24	328.68	276.79	391.39	618.88	454.83	420.76		418.91	473.30	462.01	396.70
9/15/06 3:00	24.25	328.69	276.78	391.39	618.89	454.83	420.76		418.91	473.30	462.01	396.71
9/15/06 3:15	24.25	328.70	276.79	391.41	618.89	454.84	420.76		418.92	473.30	462.01	396.72
9/15/06 3:30	24.26	328.70	276.79	391.41	618.89	454.84	420.77		418.91	473.29	462.01	396.72
9/15/06 3:45	24.26	328.70	276.80	391.41	618.89	454.84	420.77		418.92	473.29	462.01	396.72
9/15/06 4:00	24.25	328.71	276.80	391.43	618.89	454.84	420.77		418.91	473.30	462.01	396.73
9/15/06 4:15	24.25	328.71	276.81	391.43	618.89	454.85	420.77		418.92	473.31	462.01	396.73
9/15/06 4:30	24.25	328.72	276.81	391.43	618.89	454.84	420.77		418.92	473.30	462.02	396.73
9/15/06 4:45	24.26	328.72	276.82	391.44	618.89	454.85	420.77		418.92	473.30	462.02	396.74
9/15/06 5:00	24.26	328.73	276.82	391.46	618.89	454.85	420.78		418.92	473.30	462.03	396.76
9/15/06 5:15	24.27	328.73	276.83	391.46	618.91	454.85	420.78		418.93	473.30	462.04	396.76
9/15/06 5:30	24.28	328.74	276.84	391.48	618.91	454.86	420.79		418.93	473.29	462.04	396.77

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
9/15/06 5:45	24.28	328.74	276.84	391.48	618.91	454.87	420.79		418.93	473.29	462.04	396.78
9/15/06 6:00	24.28	328.75	276.85	391.49	618.91	454.87	420.79		418.94	473.30	462.05	396.78
9/15/06 6:15	24.29	328.75	276.85	391.49	618.91	454.87	420.79		418.93	473.30	462.05	396.79
9/15/06 6:30	24.28	328.75	276.85	391.51	618.91	454.87	420.79		418.93	473.30	462.05	396.80
9/15/06 6:45	24.28	328.75	276.86	391.51	618.91	454.87	420.79		418.93	473.30	462.05	396.80
9/15/06 7:00	24.28	328.76	276.86	391.51	618.91	454.87	420.80		418.93	473.30	462.05	396.80
9/15/06 7:15	24.29	328.76	276.87	391.52	618.91	454.87	420.80		418.94	473.30	462.05	396.80
9/15/06 7:30	24.29	328.77	276.87	391.52	618.92	454.87	420.80		418.94	473.30	462.05	396.82
9/15/06 7:45	24.29	328.77	276.87	391.54	618.92	454.87	420.80		418.94	473.30	462.05	396.82
9/15/06 8:00	24.28	328.77	276.87	391.54	618.91	454.87	420.80		418.94	473.31	462.05	396.82
9/15/06 8:15	24.28	328.77	276.88	391.54	618.91	454.88	420.81		418.94	473.31	462.05	396.82
9/15/06 8:30	24.28	328.77	276.88	391.54	618.91	454.87	420.80		418.94	473.31	462.05	396.82
9/15/06 8:45	24.28	328.77	276.88	391.56	618.91	454.87	420.80		418.93	473.31	462.05	396.83
9/15/06 9:00	24.26	328.77	276.88	391.56	618.91	454.87	420.80		418.93	473.31	462.05	396.83
9/15/06 9:15	24.25	328.78	276.88	391.56	618.91	454.86	420.80		418.93	473.32	462.05	396.83
9/15/06 9:30	24.24	328.77	276.88	391.56	618.91	454.87	420.79		418.92	473.31	462.05	396.83
9/15/06 9:45	24.24	328.77	276.88	391.56	618.91	454.86	420.79		418.92	473.32	462.05	396.84
9/15/06 10:00	24.24	328.78	276.88	391.56	618.90	454.86	420.79		418.92	473.32	462.05	396.84
9/15/06 10:15	24.23	328.78	276.89	391.56	618.91	454.86	420.79		418.92	473.32	462.05	396.84
9/15/06 10:30	24.22	328.78	276.88	391.59	618.90	454.87	420.79		418.91	473.32	462.06	396.85
9/15/06 10:45	24.22	328.78	276.89	391.59	618.90	454.85	420.79		418.92	473.32	462.06	396.85
9/15/06 11:00	24.22	328.78	276.90	391.59	618.90	454.85	420.78		418.92	473.31	462.06	396.85
9/15/06 11:15	24.22	328.79	276.89	391.59	618.90	454.85	420.78		418.92	473.31	462.06	396.86
9/15/06 11:30	24.23	328.79	276.91	391.59	618.91	454.86	420.78		418.91	473.31	462.06	396.87
9/15/06 11:45	24.23	328.79	276.89	391.61	618.90	454.85	420.78		418.93	473.31	462.06	396.87
9/15/06 12:00	24.23	328.79	276.89	391.59	618.89	454.84	420.79		418.92	473.31	462.05	396.87
9/15/06 12:15	24.22	328.79	276.87	391.61	618.89	454.83	420.78		418.91	473.30	462.04	396.87
9/15/06 12:30	24.22	328.79	276.89	391.59	618.89	454.86	420.78		418.92	473.30	462.04	396.87
9/15/06 12:45	24.22	328.80	276.91	391.61	618.89	454.85	420.78		418.92	473.30	462.05	396.87
9/15/06 13:00	24.22	328.79	276.89	391.62	618.89	454.87	420.78		418.92	473.30	462.05	396.87
9/15/06 13:15	24.22	328.80	276.91	391.61	618.90	454.86	420.79		418.92	473.30	462.05	396.88
9/15/06 13:30	24.22	328.80	276.89	391.62	618.89	454.87	420.81		418.91	473.30	462.05	396.89
9/15/06 13:45	24.21	328.80	276.91	391.62	618.89	454.87	420.82		418.92	473.30	462.04	396.89
9/15/06 14:00	24.20	328.80	276.89	391.62	618.88	454.87	420.82		418.91	473.30	462.04	396.88
9/15/06 14:15	24.20	328.79	276.89	391.62	618.88	454.87	420.82		418.91	473.30	462.04	396.88
9/15/06 14:30	24.20	328.79	276.90	391.62	618.88	454.87	420.83		418.91	473.30	462.04	396.88
9/15/06 14:45	24.20	328.80	276.90	391.62	618.88	454.87	420.82		418.90	473.30	462.04	396.89
9/15/06 15:00	24.20	328.79	276.91	391.62	618.88	454.88	420.82		418.91	473.30	462.04	396.89
9/15/06 15:15	24.20	328.80	276.91	391.62	618.88	454.88	420.82		418.90	473.30	462.04	396.89
9/15/06 15:30	24.21	328.80	276.88	391.64	618.88	454.85	420.83		418.90	473.28	462.05	396.89
9/15/06 15:45	24.21	328.80	276.89	391.64	618.87	454.86	420.81		418.91	473.29	462.04	396.89
9/15/06 16:00	24.24	328.81	276.90	391.66	618.88	454.86	420.82		418.91	473.28	462.04	396.89
9/15/06 16:15	24.23	328.81	276.92	391.67	618.88	454.87	420.82		418.91	473.28	462.04	396.91
9/15/06 16:30	24.24	328.81	276.92	391.67	618.88	454.87	420.82		418.90	473.28	462.04	396.91
9/15/06 16:45	24.24	328.81	276.93	391.67	618.88	454.88	420.82		418.90	473.28	462.04	396.91
9/15/06 17:00	24.24	328.81	276.93	391.67	618.87	454.87	420.82		418.89	473.28	462.04	396.91
9/15/06 17:15	24.24	328.81	276.91	391.67	618.87	454.87	420.82		418.88	473.29	462.03	396.91
9/15/06 17:30	24.23	328.81	276.92	391.67	618.87	454.86	420.81		418.89	473.29	462.04	396.91
9/15/06 17:45	24.24	328.81	276.92	391.69	618.88	454.87	420.82		418.90	473.29	462.04	396.91
9/15/06 18:00	24.24	328.82	276.92	391.71	618.87	454.87	420.82		418.89	473.28	462.04	396.92
9/15/06 18:15	24.22	328.81	276.93	391.71	618.87	454.87	420.82		418.89	473.29	462.04	396.93
9/15/06 18:30	24.22	328.81	276.92	391.69	618.87	454.86	420.81		418.89	473.29	462.03	396.93
9/15/06 18:45	24.22	328.81	276.92	391.69	618.87	454.86	420.82		418.89	473.30	462.04	396.92
9/15/06 19:00	24.23	328.82	276.93	391.71	618.87	454.85	420.81		418.89	473.29	462.03	396.93
9/15/06 19:15	24.23	328.82	276.94	391.71	618.87	454.86	420.81		418.89	473.29	462.04	396.94
9/15/06 19:30	24.24	328.84	276.94	391.71	618.87	454.87	420.82		418.90	473.29	462.04	396.95
9/15/06 19:45	24.25	328.84	276.95	391.72	618.87	454.87	420.82		418.89	473.28	462.04	396.96
9/15/06 20:00	24.25	328.84	276.95	391.74	618.88	454.88	420.83		418.90	473.28	462.04	396.96
9/15/06 20:15	24.24	328.84	276.96	391.74	618.89	454.87	420.83		418.90	473.30	462.04	396.97
9/15/06 20:30	24.24	328.84	276.95	391.72	618.88	454.87	420.82		418.89	473.29	462.04	396.96
9/15/06 20:45	24.25	328.85	276.96	391.74	618.88	454.88	420.83		418.89	473.29	462.05	396.97
9/15/06 21:00	24.24	328.85	276.96	391.74	618.88	454.88	420.83		418.90	473.30	462.05	396.98
9/15/06 21:15	24.24	328.85	276.96	391.74	618.88	454.87	420.83		418.89	473.30	462.04	396.98
9/15/06 21:30	24.26	328.86	276.97	391.76	618.88	454.88	420.83		418.89	473.29	462.05	396.98
9/15/06 21:45	24.26	328.86	276.97	391.77	618.89	454.88	420.83		418.90	473.29	462.04	397.00
9/15/06 22:00	24.27	328.86	276.98	391.77	618.89	454.89	420.84		418.90	473.28	462.05	397.00
9/15/06 22:15	24.27	328.87	276.98	391.77	618.89	454.89	420.84		418.91	473.28	462.06	397.00
9/15/06 22:30	24.28	328.88	276.99	391.77	618.89	454.89	420.84		418.91	473.27	462.06	397.01
9/15/06 22:45	24.29	328.88	277.00	391.79	618.89	454.90	420.85		418.91	473.27	462.06	397.02
9/15/06 23:00	24.28	328.89	277.00	391.79	618.90	454.90	420.85		418.91	473.28	462.06	397.02
9/15/06 23:15	24.28	328.88	277.00	391.79	618.89	454.89	420.85		418.91	473.28	462.06	397.02
9/15/06 23:30	24.27	328.88	277.00	391.79	618.89	454.89	420.85		418.90	473.29	462.06	397.03
9/15/06 23:45	24.27	328.89	277.00	391.79	618.89	454.89	420.84		418.91	473.28	462.06	397.03
9/16/06 0:00	24.28	328.89	277.01	391.79	618.90	454.90	420.85		418.91	473.27	462.07	397.03
9/16/06 0:15	24.28	328.89	277.00	391.81	618.89	454.89	420.85		418.91	473.28	462.07	397.04
9/16/06 0:30	24.27	328.89	277.01	391.81	618.89	454.89	420.85		418.91	473.29	462.06	397.04
9/16/06 0:45	24.27	328.90	277.01	391.81	618.89	454.89	420.85		418.91	473.29	462.06	397.05
9/16/06 1:00	24.27	328.90	277.01	391.81	618.89	454.89	420.84		418.91	473.29	462.06	397.04
9/16/06 1:15	24.27	328.90	277.02	391.81	618.89	454.89	420.85		418.91	473.29	462.07	397.05
9/16/06 1:30	24.25	328.90	277.02	391.81	618.88	454.89	420.84		418.90	473.30	462.06	397.06
9/16/06 1:45	24.24	328.89	277.01	391.81	618.88	454.88	420.84		418.89	473.31	462.05	397.05
9/16/06 2:00	24.26	328.90	277.01	391.81	618.89	454.88	420.84		418.89	473.29	462.06	397.05
9/16/06 2:15	24.25	328.91	277.02	391.81	618.89	454.89	420.84		418.90	473.29	462.06	397.06
9/16/06 2:30	24.26	328.91	277.03	391.81	618.89	454.89	420.85		418.90	473.29	462.06	397.06
9/16/06 2:45	24.26	328.91	277.03	391.81	618.89	454.89	420.85		418.90	473.29	462.06	397.07
9/16/06 3:00	24.26	328.92	277.03	391.81	618.89	454.89	420.85		418.90	473.30	462.06	397.07
9/16/06 3:15	24.26	328.92	277.04	391.81	618.89	454.89	420.85		418.91	473.30	462.06	397.07
9/16/06 3:30	24.27	328.92	277.03	391.81	618.89	454.88	420.84		418.90	473.29	462.07	397.08
9/16/06 3:45	24.27	328.92	277.04	391.81	618.89	454.90	420.85		418.91	473.29	462.08	397.08
9/16/06 4:00	24.26	328.93	277.04	391.82	618.89	454.90	420.85		418.91	473.30	462.07	397.09
9/16/06 4:15	24.25	328.93	277.04	391.82	618.89	454.89	420.85		418.90	473.31	462.07	397.09
9/16/06 4:30	24.25	328.93	277.04	391.81	618.89	454.89	420.85		418.90	473.30	462.07	397.09
9/16/06 4:45	24.25	328.93	277.05	391.81	618.89	454.89	420.85		418.90	473.31	462.07	397.10
9/16/06 5:00	24.25	328.93	277.06	391.82	618.89	454.89	420.85		418.91	473.31	462.08	397.10
9/16/06 5:15	24.25	328.94	277.06	391.81	618.90	454.90	420.86		418.91	473.31	462.09	397.10
9/16/06 5:30	24.26	328.94	277.06	391.82	618.90	454.90	420.85		418.91	473.30	462.09	397.11
9/16/06 5:45	24.26	328.95	277.07	391.82	618.90	454.90	420.86		418.91	473.30	462.09	397.11
9/16/06 6:00	24.27	328.95	277.08	391.82	618.91	454.90	420.86		418.92	473.30	462.10	397.11
9/16/06 6:15	24.27	328.96	277.08	391.82	618.91	454.91	420.87		418.92	473.30	462.11	397.12

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
9/16/06 6:30	24.27	328.97	277.08	391.84	618.91	454.91	420.87		418.93	473.30	462.10	397.13
9/16/06 6:45	24.28	328.97	277.09	391.84	618.91	454.91	420.87		418.93	473.30	462.11	397.13
9/16/06 7:00	24.27	328.97	277.09	391.84	618.92	454.92	420.87		418.93	473.31	462.11	397.15
9/16/06 7:15	24.27	328.98	277.09	391.84	618.92	454.92	420.88		418.93	473.31	462.12	397.15
9/16/06 7:30	24.27	328.98	277.10	391.84	618.92	454.92	420.88		418.93	473.31	462.11	397.15
9/16/06 7:45	24.28	328.98	277.10	391.84	618.92	454.93	420.88		418.93	473.31	462.12	397.15
9/16/06 8:00	24.28	328.99	277.11	391.84	618.92	454.93	420.88		418.93	473.31	462.12	397.16
9/16/06 8:15	24.30	329.00	277.11	391.84	618.92	454.93	420.89		418.93	473.30	462.13	397.16
9/16/06 8:30	24.30	329.01	277.13	391.85	618.93	454.94	420.89		418.94	473.30	462.14	397.18
9/16/06 8:45	24.30	329.01	277.13	391.84	618.93	454.94	420.90		418.95	473.29	462.14	397.18
9/16/06 9:00	24.31	329.02	277.14	391.85	618.93	454.95	420.90		418.94	473.29	462.14	397.17
9/16/06 9:15	24.31	329.02	277.13	391.85	618.93	454.94	420.91		418.95	473.29	462.14	397.19
9/16/06 9:30	24.31	329.03	277.15	391.85	618.93	454.95	420.90		418.95	473.29	462.14	397.20
9/16/06 9:45	24.31	329.03	277.16	391.85	618.93	454.96	420.91		418.96	473.29	462.15	397.20
9/16/06 10:00	24.31	329.04	277.14	391.85	618.93	454.95	420.91		418.95	473.28	462.15	397.20
9/16/06 10:15	24.31	329.04	277.15	391.85	618.94	454.96	420.91		418.96	473.28	462.15	397.20
9/16/06 10:30	24.31	329.04	277.15	391.87	618.94	454.95	420.91		418.95	473.29	462.15	397.21
9/16/06 10:45	24.31	329.04	277.16	391.84	618.95	454.96	420.91		418.96	473.28	462.15	397.21
9/16/06 11:00	24.32	329.05	277.16	391.85	618.95	454.95	420.91		418.95	473.27	462.16	397.21
9/16/06 11:15	24.33	329.05	277.17	391.85	618.95	454.97	420.92		418.96	473.26	462.17	397.22
9/16/06 11:30	24.33	329.06	277.18	391.85	618.95	454.96	420.92		418.95	473.26	462.16	397.24
9/16/06 11:45	24.34	329.06	277.18	391.85	618.95	454.97	420.92		418.97	473.26	462.16	397.24
9/16/06 12:00	24.34	329.07	277.19	391.85	618.95	454.97	420.92		418.94	473.25	462.16	397.23
9/16/06 12:15	24.36	329.07	277.20	391.85	618.96	454.97	420.92		418.96	473.24	462.17	397.24
9/16/06 12:30	24.36	329.07	277.19	391.85	618.96	454.97	420.92		418.95	473.24	462.17	397.25
9/16/06 12:45	24.36	329.08	277.19	391.85	618.95	454.97	420.92		418.96	473.24	462.17	397.25
9/16/06 13:00	24.37	329.08	277.20	391.84	618.96	454.97	420.93		418.96	473.23	462.17	397.25
9/16/06 13:15	24.39	329.08	277.21	391.84	618.96	454.97	420.93		418.95	473.22	462.17	397.25
9/16/06 13:30	24.40	329.08	277.21	391.85	618.96	454.98	420.93		418.96	473.21	462.19	397.25
9/16/06 13:45	24.39	329.09	277.21	391.85	618.96	454.97	420.92		418.97	473.22	462.18	397.26
9/16/06 14:00	24.40	329.09	277.21	391.85	618.96	454.97	420.93		418.96	473.20	462.18	397.26
9/16/06 14:15	24.40	329.09	277.21	391.84	618.96	454.98	420.93		418.96	473.20	462.18	397.26
9/16/06 14:30	24.41	329.09	277.22	391.84	618.96	454.98	420.92		418.96	473.20	462.18	397.26
9/16/06 14:45	24.43	329.10	277.23	391.84	618.96	454.98	420.92		418.97	473.19	462.18	397.26
9/16/06 15:00	24.43	329.11	277.23	391.84	618.96	454.98	420.91		418.97	473.18	462.18	397.27
9/16/06 15:15	24.44	329.11	277.23	391.84	618.96	454.98	420.95		418.97	473.18	462.17	397.27
9/16/06 15:30	24.44	329.11	277.23	391.84	618.96	454.98	420.93		418.96	473.17	462.17	397.27
9/16/06 15:45	24.46	329.10	277.23	391.82	618.96	454.98	420.91		418.97	473.22	462.20	397.27
9/16/06 16:00	24.47	329.09	277.22	391.84	618.97	454.98	420.92		418.97	473.21	462.20	397.28
9/16/06 16:15	24.48	329.08	277.20	391.84	618.97	454.99	420.92		418.97	473.20	462.20	397.29
9/16/06 16:30	24.48	329.08	277.20	391.84	618.97	454.99	420.93		418.97	473.19	462.20	397.29
9/16/06 16:45	24.49	329.07	277.19	391.84	618.97	454.99	420.92		418.97	473.18	462.20	397.29
9/16/06 17:00	24.51	329.06	277.18	391.82	618.97	454.99	420.89		418.97	473.17	462.20	397.30
9/16/06 17:15	24.53	329.05	277.10	391.82	618.98	455.00	420.84		418.98	473.16	462.20	397.30
9/16/06 17:30	24.54	329.04	277.05	391.84	618.98	455.01	420.84		418.98	473.23	462.21	397.30
9/16/06 17:45	24.55	329.03	277.03	391.84	618.98	455.01	420.85		418.98	473.22	462.21	397.31
9/16/06 18:00	24.55	329.03	277.03	391.84	618.98	455.01	420.85		418.98	473.22	462.22	397.33
9/16/06 18:15	24.55	329.03	277.03	391.84	618.98	455.01	420.85		418.98	473.22	462.22	397.32
9/16/06 18:30	24.56	329.03	277.02	391.84	618.99	455.01	420.85		418.98	473.21	462.22	397.32
9/16/06 18:45	24.55	329.03	277.03	391.84	618.99	455.01	420.86		418.98	473.21	462.22	397.33
9/16/06 19:00	24.56	329.03	277.06	391.84	618.99	455.01	420.86		418.98	473.21	462.23	397.33
9/16/06 19:15	24.56	329.04	277.07	391.84	618.99	455.02	420.87		418.99	473.21	462.22	397.33
9/16/06 19:30	24.57	329.04	277.08	391.84	618.99	455.02	420.86		418.99	473.21	462.23	397.33
9/16/06 19:45	24.58	329.03	277.10	391.82	618.99	455.02	420.87		418.99	473.21	462.24	397.35
9/16/06 20:00	24.57	329.04	277.15	391.84	619.00	455.02	420.88		418.99	473.21	462.24	397.33
9/16/06 20:15	24.58	329.04	277.17	391.82	618.99	455.02	420.88		418.99	473.21	462.25	397.34
9/16/06 20:30	24.58	329.04	277.19	391.82	619.00	455.02	420.88		419.00	473.21	462.25	397.35
9/16/06 20:45	24.58	329.05	277.19	391.82	619.00	455.03	420.88		419.00	473.21	462.25	397.35
9/16/06 21:00	24.59	329.04	277.20	391.82	619.01	455.03	420.87		419.01	473.27	462.25	397.35
9/16/06 21:15	24.59	329.04	277.20	391.82	619.01	455.03	420.87		419.01	473.27	462.25	397.35
9/16/06 21:30	24.59	329.04	277.21	391.82	619.01	455.04	420.88		419.02	473.27	462.25	397.35
9/16/06 21:45	24.59	329.05	277.21	391.82	619.01	455.04	420.88		419.01	473.27	462.26	397.35
9/16/06 22:00	24.59	329.05	277.21	391.82	619.01	455.04	420.87		419.01	473.27	462.26	397.35
9/16/06 22:15	24.59	329.05	277.22	391.82	619.01	455.04	420.87		419.01	473.27	462.26	397.36
9/16/06 22:30	24.59	329.06	277.22	391.81	619.01	455.04	420.88		419.01	473.28	462.26	397.36
9/16/06 22:45	24.59	329.06	277.23	391.82	619.01	455.04	420.88		419.00	473.28	462.26	397.36
9/16/06 23:00	24.59	329.06	277.23	391.82	619.01	455.04	420.88		419.00	473.28	462.25	397.36
9/16/06 23:15	24.58	329.07	277.22	391.81	619.01	455.04	420.88		419.00	473.28	462.27	397.36
9/16/06 23:30	24.58	329.07	277.23	391.81	619.01	455.04	420.88		419.00	473.28	462.27	397.36
9/16/06 23:45	24.58	329.07	277.24	391.81	619.01	455.03	420.88		418.99	473.28	462.26	397.36
9/17/06 0:00	24.58	329.07	277.23	391.79	619.01	455.04	420.87		418.99	473.28	462.26	397.36
9/17/06 0:15	24.59	329.07	277.22	391.79	619.01	455.04	420.87		418.99	473.28	462.27	397.36
9/17/06 0:30	24.60	329.06	277.21	391.79	619.02	455.04	420.87		418.99	473.27	462.27	397.36
9/17/06 0:45	24.60	329.06	277.22	391.79	619.02	455.04	420.87		418.99	473.27	462.27	397.37
9/17/06 1:00	24.60	329.06	277.21	391.79	619.02	455.04	420.87		418.99	473.27	462.27	397.37
9/17/06 1:15	24.60	329.07	277.20	391.79	619.02	455.04	420.87		418.99	473.27	462.27	397.38
9/17/06 1:30	24.61	329.06	277.20	391.77	619.02	455.04	420.86		418.99	473.26	462.27	397.37
9/17/06 1:45	24.60	329.07	277.21	391.77	619.02	455.04	420.86		418.99	473.26	462.27	397.38
9/17/06 2:00	24.61	329.07	277.21	391.77	619.02	455.04	420.87		418.99	473.26	462.27	397.38
9/17/06 2:15	24.61	329.07	277.23	391.77	619.02	455.04	420.87		418.99	473.26	462.27	397.38
9/17/06 2:30	24.61	329.07	277.23	391.77	619.02	455.04	420.87		418.99	473.26	462.27	397.38
9/17/06 2:45	24.61	329.08	277.23	391.76	619.02	455.04	420.87		418.99	473.26	462.27	397.38
9/17/06 3:00	24.60	329.08	277.22	391.76	619.02	455.04	420.87		418.99	473.26	462.27	397.37
9/17/06 3:15	24.60	329.08	277.23	391.76	619.02	455.04	420.87		418.99	473.26	462.27	397.38
9/17/06 3:30	24.60	329.08	277.23	391.76	619.02	455.04	420.86		418.98	473.26	462.28	397.38
9/17/06 3:45	24.60	329.08	277.23	391.76	619.02	455.04	420.87		418.99	473.26	462.28	397.38
9/17/06 4:00	24.60	329.09	277.22	391.76	619.02	455.04	420.87		418.99	473.26	462.28	397.38
9/17/06 4:15	24.60	329.09	277.22	391.74	619.02	455.04	420.87		418.99	473.27	462.28	397.38
9/17/06 4:30	24.60	329.09	277.22	391.74	619.01	455.04	420.87		418.98	473.27	462.28	397.37
9/17/06 4:45	24.60	329.10	277.22	391.74	619.01	455.04	420.87		418.98	473.27	462.28	397.39
9/17/06 5:00	24.60	329.10	277.22	391.72	619.02	455.05	420.87		418.99	473.27	462.28	397.38
9/17/06 5:15	24.60	329.11	277.22	391.74	619.02	455.04	420.88		418.99	473.27	462.28	397.39
9/17/06 5:30	24.59	329.11	277.23	391.72	619.02	455.04	420.88		418.99	473.28	462.29	397.38
9/17/06 5:45	24.59	329.11	277.22	391.72	619.02	455.05	420.88		418.99	473.28	462.29	397.38
9/17/06 6:00	24.59	329.11	277.23	391.72	619.02	455.05	420.88		418.98	473.28	462.29	397.39
9/17/06 6:15	24.59	329.12	277.23	391.71	619.02	455.05	420.89		418.99	473.28	462.29	397.39
9/17/06 6:30	24.59	329.12	277.24	391.72	619.03	455.05	420.88		418.99	473.29	462.30	397.40
9/17/06 6:45	24.59	329.13	277.24	391.71	619.02	455.05	420.88		418.98	473.28	462.30	397.39
9/17/06 7:00	24.60	329.12	277.24	391.71	619.03	455.06	420.88		419.00	473.28	462.30	397.40
9/17/06 7:15	24.60	329.13	277.25	391.71	619.03	455.06	420.88		419.00	473.28	462.30	397.40

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
9/17/06 7:30	24.60	329.13	277.28	391.71	619.04	455.06	420.89		419.01	473.29	462.31	397.40
9/17/06 7:45	24.60	329.13	277.32	391.71	619.04	455.07	420.91		419.01	473.29	462.32	397.40
9/17/06 8:00	24.61	329.14	277.36	391.71	619.04	455.07	420.92		419.01	473.29	462.32	397.40
9/17/06 8:15	24.60	329.14	277.39	391.71	619.05	455.07	420.93		419.00	473.29	462.32	397.41
9/17/06 8:30	24.60	329.15	277.44	391.71	619.05	455.07	420.94		419.01	473.29	462.33	397.40
9/17/06 8:45	24.60	329.16	277.44	391.71	619.05	455.08	420.95		419.02	473.29	462.33	397.42
9/17/06 9:00	24.60	329.16	277.46	391.71	619.05	455.08	420.96		419.02	473.28	462.33	397.42
9/17/06 9:15	24.60	329.16	277.48	391.71	619.05	455.08	420.95		419.02	473.29	462.33	397.42
9/17/06 9:30	24.60	329.17	277.46	391.71	619.06	455.08	420.96		419.02	473.29	462.33	397.41
9/17/06 9:45	24.59	329.17	277.49	391.69	619.06	455.08	420.97		419.02	473.30	462.33	397.42
9/17/06 10:00	24.59	329.19	277.51	391.69	619.05	455.08	420.99		419.02	473.30	462.33	397.42
9/17/06 10:15	24.59	329.20	277.49	391.69	619.06	455.08	421.01		419.02	473.30	462.33	397.41
9/17/06 10:30	24.58	329.21	277.43	391.69	619.05	455.09	421.01		419.03	473.30	462.34	397.41
9/17/06 10:45	24.58	329.21	277.48	391.67	619.05	455.07	421.04		419.02	473.30	462.34	397.40
9/17/06 11:00	24.58	329.21	277.47	391.67	619.05	455.08	421.04		419.01	473.30	462.34	397.40
9/17/06 11:15	24.58	329.21	277.47	391.67	619.05	455.08	421.05		419.01	473.31	462.34	397.41
9/17/06 11:30	24.58	329.22	277.47	391.66	619.05	455.08	421.05		419.01	473.30	462.34	397.41
9/17/06 11:45	24.57	329.22	277.45	391.66	619.05	455.07	421.06		419.03	473.30	462.33	397.42
9/17/06 12:00	24.58	329.21	277.46	391.66	619.05	455.09	421.05		419.02	473.30	462.34	397.42
9/17/06 12:15	24.57	329.22	277.46	391.66	619.05	455.07	421.07		419.01	473.30	462.33	397.41
9/17/06 12:30	24.56	329.22	277.47	391.66	619.05	455.07	421.08		419.02	473.30	462.33	397.41
9/17/06 12:45	24.57	329.22	277.47	391.64	619.05	455.08	421.05		419.01	473.30	462.34	397.41
9/17/06 13:00	24.57	329.22	277.47	391.64	619.05	455.08	421.03		419.00	473.29	462.33	397.40
9/17/06 13:15	24.57	329.22	277.48	391.62	619.05	455.08	421.04		419.03	473.30	462.33	397.41
9/17/06 13:30	24.57	329.24	277.46	391.61	619.05	455.06	421.03		419.01	473.29	462.33	397.40
9/17/06 13:45	24.56	329.22	277.47	391.61	619.05	455.07	421.05		419.00	473.29	462.33	397.40
9/17/06 14:00	24.56	329.22	277.48	391.61	619.04	455.07	421.08		419.01	473.29	462.33	397.40
9/17/06 14:15	24.56	329.22	277.46	391.61	619.05	455.06	421.05		418.98	473.28	462.33	397.40
9/17/06 14:30	24.56	329.22	277.46	391.59	619.04	455.07	421.05		419.00	473.28	462.33	397.40
9/17/06 14:45	24.56	329.22	277.45	391.59	619.04	455.05	421.02		419.00	473.28	462.32	397.40
9/17/06 15:00	24.56	329.21	277.46	391.59	619.03	455.05	420.99		418.99	473.28	462.32	397.39
9/17/06 15:15	24.56	329.21	277.47	391.57	619.03	455.06	420.99		418.99	473.28	462.32	397.39
9/17/06 15:30	24.57	329.21	277.46	391.57	619.03	455.05	420.99		418.99	473.27	462.32	397.39
9/17/06 15:45	24.57	329.20	277.46	391.57	619.03	455.05	420.98		418.99	473.27	462.31	397.39
9/17/06 16:00	24.58	329.20	277.47	391.56	619.03	455.05	420.98		418.99	473.27	462.31	397.38
9/17/06 16:15	24.57	329.20	277.46	391.56	619.02	455.04	420.97		418.99	473.27	462.31	397.38
9/17/06 16:30	24.57	329.20	277.47	391.56	619.03	455.05	420.96		418.99	473.26	462.32	397.38
9/17/06 16:45	24.58	329.19	277.47	391.54	619.03	455.04	420.96		418.99	473.26	462.31	397.38
9/17/06 17:00	24.58	329.19	277.46	391.54	619.03	455.04	420.95		418.99	473.26	462.32	397.39
9/17/06 17:15	24.59	329.19	277.47	391.54	619.03	455.04	420.94		418.99	473.25	462.32	397.37
9/17/06 17:30	24.59	329.20	277.48	391.54	619.03	455.05	420.94		418.99	473.25	462.32	397.38
9/17/06 17:45	24.60	329.19	277.47	391.54	619.03	455.04	420.93		418.98	473.25	462.32	397.38
9/17/06 18:00	24.60	329.19	277.48	391.52	619.03	455.04	420.92		419.00	473.24	462.32	397.39
9/17/06 18:15	24.61	329.18	277.49	391.52	619.03	455.05	420.91		419.00	473.24	462.32	397.38
9/17/06 18:30	24.62	329.17	277.49	391.52	619.03	455.05	420.90		419.01	473.24	462.33	397.38
9/17/06 18:45	24.62	329.18	277.50	391.52	619.04	455.05	420.89		419.01	473.24	462.33	397.39
9/17/06 19:00	24.62	329.17	277.50	391.54	619.04	455.06	420.89		419.00	473.24	462.33	397.39
9/17/06 19:15	24.62	329.17	277.50	391.54	619.04	455.06	420.89		419.01	473.24	462.33	397.39
9/17/06 19:30	24.63	329.17	277.50	391.52	619.04	455.06	420.90		419.01	473.23	462.33	397.40
9/17/06 19:45	24.63	329.17	277.51	391.52	619.05	455.06	420.88		419.01	473.23	462.34	397.39
9/17/06 20:00	24.64	329.17	277.51	391.52	619.05	455.07	420.88		419.00	473.24	462.35	397.40
9/17/06 20:15	24.64	329.17	277.52	391.52	619.05	455.07	420.88		419.01	473.24	462.35	397.40
9/17/06 20:30	24.64	329.17	277.52	391.52	619.06	455.07	420.87		419.02	473.24	462.35	397.40
9/17/06 20:45	24.64	329.17	277.53	391.51	619.06	455.08	420.97		419.02	473.31	462.35	397.40
9/17/06 21:00	24.64	329.17	277.52	391.52	619.06	455.08	420.97		419.02	473.32	462.35	397.40
9/17/06 21:15	24.64	329.17	277.53	391.52	619.06	455.08	420.97		419.02	473.32	462.36	397.40
9/17/06 21:30	24.64	329.18	277.53	391.51	619.06	455.08	420.98		419.02	473.32	462.36	397.40
9/17/06 21:45	24.64	329.18	277.53	391.51	619.07	455.08	420.98		419.03	473.33	462.36	397.40
9/17/06 22:00	24.64	329.19	277.53	391.51	619.06	455.07	420.98		419.02	473.33	462.36	397.40
9/17/06 22:15	24.64	329.19	277.53	391.49	619.07	455.08	420.98		419.02	473.33	462.35	397.40
9/17/06 22:30	24.64	329.19	277.53	391.49	619.07	455.08	420.98		419.02	473.33	462.36	397.40
9/17/06 22:45	24.64	329.20	277.54	391.49	619.07	455.08	420.99		419.02	473.33	462.36	397.40
9/17/06 23:00	24.64	329.20	277.54	391.49	619.06	455.08	420.98		419.02	473.33	462.36	397.40
9/17/06 23:15	24.63	329.20	277.54	391.48	619.06	455.08	420.99		419.02	473.33	462.36	397.40
9/17/06 23:30	24.64	329.20	277.54	391.48	619.06	455.08	420.99		419.02	473.33	462.37	397.40
9/17/06 23:45	24.63	329.21	277.54	391.48	619.05	455.08	420.99		419.02	473.34	462.37	397.40
9/18/06 0:00	24.63	329.20	277.54	391.48	619.05	455.08	420.99		419.02	473.33	462.36	397.40
9/18/06 0:15	24.64	329.20	277.55	391.48	619.06	455.08	420.99		419.02	473.33	462.36	397.40
9/18/06 0:30	24.64	329.20	277.55	391.46	619.06	455.08	420.99		419.02	473.33	462.37	397.40
9/18/06 0:45	24.64	329.21	277.55	391.46	619.06	455.08	420.99		419.02	473.33	462.37	397.40
9/18/06 1:00	24.63	329.21	277.54	391.46	619.06	455.08	420.99		419.01	473.33	462.36	397.39
9/18/06 1:15	24.63	329.21	277.55	391.44	619.06	455.08	420.98		419.02	473.33	462.36	397.40
9/18/06 1:30	24.64	329.20	277.55	391.44	619.06	455.08	420.98		419.02	473.32	462.36	397.39
9/18/06 1:45	24.64	329.20	277.55	391.44	619.05	455.08	420.98		419.02	473.32	462.37	397.39
9/18/06 2:00	24.63	329.21	277.55	391.43	619.05	455.08	420.98		419.02	473.33	462.37	397.39
9/18/06 2:15	24.63	329.20	277.55	391.44	619.06	455.07	420.98		419.01	473.32	462.37	397.39
9/18/06 2:30	24.64	329.20	277.55	391.43	619.05	455.07	420.98		419.01	473.32	462.36	397.39
9/18/06 2:45	24.63	329.21	277.55	391.43	619.05	455.07	420.98		419.01	473.32	462.37	397.37
9/18/06 3:00	24.63	329.21	277.55	391.41	619.05	455.07	420.98		419.01	473.32	462.36	397.37
9/18/06 3:15	24.63	329.21	277.55	391.41	619.05	455.07	420.98		419.01	473.32	462.36	397.38
9/18/06 3:30	24.63	329.20	277.55	391.41	619.05	455.07	420.98		419.01	473.31	462.37	397.38
9/18/06 3:45	24.64	329.21	277.55	391.41	619.05	455.07	420.98		419.01	473.31	462.37	397.38
9/18/06 4:00	24.64	329.20	277.55	391.41	619.06	455.07	420.97		419.01	473.31	462.37	397.37
9/18/06 4:15	24.65	329.20	277.56	391.41	619.05	455.07	420.96		419.01	473.31	462.37	397.38
9/18/06 4:30	24.65	329.20	277.57	391.39	619.06	455.08	420.95		419.01	473.30	462.37	397.38
9/18/06 4:45	24.65	329.19	277.57	391.39	619.07	455.08	420.95		419.01	473.30	462.37	397.38
9/18/06 5:00	24.66	329.19	277.57	391.39	619.07	455.08	420.94		419.02	473.30	462.38	397.39
9/18/06 5:15	24.67	329.18	277.58	391.39	619.07	455.08	420.93		419.02	473.30	462.38	397.39
9/18/06 5:30	24.67	329.18	277.59	391.39	619.08	455.09	420.93		419.02	473.29	462.39	397.39
9/18/06 5:45	24.68	329.18	277.59	391.39	619.08	455.09	420.93		419.03	473.29	462.38	397.40
9/18/06 6:00	24.68	329.19	277.59	391.39	619.08	455.09	420.93		419.03	473.30	462.39	397.40
9/18/06 6:15	24.68	329.19	277.59	391.39	619.08	455.10	420.93		419.03	473.29	462.40	397.40
9/18/06 6:30	24.69	329.19	277.60	391.39	619.09	455.10	420.93		419.03	473.29	462.40	397.40
9/18/06 6:45	24.69	329.19	277.60	391.39	619.09	455.10	420.93		419.03	473.29	462.41	397.40
9/18/06 7:00	24.70	329.19	277.61	391.39	619.09	455.11	421.01		419.04	473.29	462.41	397.40
9/18/06 7:15	24.70	329.19	277.61	391.39	619.10	455.11	421.02		419.04	473.29	462.41	397.40
9/18/06 7:30	24.70	329.19	277.61	391.39	619.11	455.12	421.02		419.05	473.29	462.42	397.41
9/18/06 7:45	24.71	329.19	277.62	391.39	619.11	455.12	421.02		419.05	473.36	462.42	397.41
9/18/06 8:00	24.71	329.19	277.63	391.39	619.11	455.12	421.02		419.05	473.36	462.43	397.41
9/18/06 8:15	24.72	329.19	277.63	391.39	619.12	455.13	421.02		419.06	473.36	462.43	397.42

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
9/18/06 8:30	24.72	329.20	277.64	391.39	619.12	455.13	421.03		419.06	473.36	462.43	397.42
9/18/06 8:45	24.72	329.20	277.64	391.39	619.12	455.13	421.03		419.06	473.36	462.44	397.43
9/18/06 9:00	24.72	329.20	277.65	391.39	619.13	455.14	421.04		419.07	473.36	462.44	397.42
9/18/06 9:15	24.73	329.20	277.65	391.41	619.13	455.14	421.04		419.06	473.36	462.45	397.43
9/18/06 9:30	24.73	329.21	277.66	391.41	619.13	455.15	421.03		419.07	473.36	462.46	397.43
9/18/06 9:45	24.73	329.21	277.66	391.39	619.13	455.15	421.04		419.08	473.36	462.46	397.43
9/18/06 10:00	24.73	329.20	277.67	391.39	619.14	455.15	421.04		419.08	473.36	462.46	397.44
9/18/06 10:15	24.74	329.21	277.66	391.41	619.14	455.16	421.04		419.08	473.36	462.47	397.44
9/18/06 10:30	24.74	329.21	277.67	391.39	619.15	455.16	421.05		419.08	473.36	462.47	397.44
9/18/06 10:45	24.74	329.21	277.67	391.39	619.15	455.16	421.05		419.08	473.37	462.46	397.44
9/18/06 11:00	24.73	329.22	277.67	391.38	619.15	455.16	421.06		419.09	473.37	462.47	397.44
9/18/06 11:15	24.73	329.22	277.67	391.38	619.15	455.16	421.07		419.08	473.37	462.47	397.44
9/18/06 11:30	24.73	329.23	277.67	391.38	619.15	455.16	421.09		419.09	473.37	462.47	397.44
9/18/06 11:45	24.72	329.24	277.67	391.36	619.15	455.16	421.11		419.09	473.37	462.47	397.43
9/18/06 12:00	24.72	329.24	277.67	391.36	619.15	455.16	421.12		419.09	473.37	462.48	397.43
9/18/06 12:15	24.72	329.25	277.68	391.36	619.15	455.16	421.14		419.08	473.37	462.47	397.43
9/18/06 12:30	24.72	329.25	277.67	391.34	619.14	455.16	421.12		419.08	473.37	462.47	397.42
9/18/06 12:45	24.71	329.25	277.67	391.34	619.14	455.15	421.13		419.09	473.37	462.47	397.42
9/18/06 13:00	24.70	329.26	277.66	391.34	619.14	455.15	421.20		419.07	473.37	462.46	397.42
9/18/06 13:15	24.70	329.27	277.66	391.33	619.14	455.14	421.21		419.08	473.37	462.47	397.41
9/18/06 13:30	24.69	329.27	277.67	391.33	619.13	455.14	421.22		419.07	473.38	462.46	397.41
9/18/06 13:45	24.68	329.27	277.66	391.31	619.13	455.13	421.22		419.06	473.37	462.46	397.40
9/18/06 14:00	24.67	329.28	277.67	391.31	619.13	455.14	421.21		419.06	473.37	462.45	397.40
9/18/06 14:15	24.67	329.28	277.66	391.31	619.12	455.12	421.19		419.06	473.37	462.46	397.40
9/18/06 14:30	24.66	329.27	277.65	391.29	619.12	455.13	421.21		419.05	473.37	462.46	397.39
9/18/06 14:45	24.66	329.27	277.65	391.28	619.12	455.14	421.22		419.04	473.37	462.44	397.39
9/18/06 15:00	24.65	329.27	277.65	391.28	619.11	455.12	421.20		419.05	473.37	462.44	397.38
9/18/06 15:15	24.65	329.27	277.64	391.28	619.11	455.11	421.20		419.06	473.37	462.44	397.37
9/18/06 15:30	24.65	329.27	277.63	391.26	619.11	455.10	421.21		419.04	473.37	462.43	397.37
9/18/06 15:45	24.65	329.27	277.63	391.26	619.11	455.10	421.19		419.04	473.37	462.43	397.36
9/18/06 16:00	24.65	329.28	277.64	391.24	619.11	455.11	421.22		419.03	473.37	462.43	397.36
9/18/06 16:15	24.65	329.27	277.63	391.24	619.10	455.10	421.21		419.03	473.37	462.43	397.36
9/18/06 16:30	24.65	329.27	277.63	391.24	619.10	455.09	421.20		419.04	473.37	462.43	397.35
9/18/06 16:45	24.64	329.27	277.63	391.23	619.10	455.09	421.15		419.03	473.37	462.43	397.35
9/18/06 17:00	24.64	329.27	277.63	391.23	619.10	455.10	421.19		419.03	473.36	462.42	397.35
9/18/06 17:15	24.64	329.26	277.63	391.23	619.09	455.09	421.15		419.02	473.36	462.43	397.35
9/18/06 17:30	24.64	329.26	277.63	391.23	619.10	455.09	421.14		419.02	473.36	462.43	397.34
9/18/06 17:45	24.65	329.26	277.63	391.21	619.09	455.10	421.15		419.02	473.36	462.43	397.35
9/18/06 18:00	24.64	329.27	277.63	391.21	619.09	455.09	421.16		419.02	473.36	462.42	397.35
9/18/06 18:15	24.65	329.27	277.63	391.21	619.09	455.09	421.16		419.02	473.36	462.43	397.34
9/18/06 18:30	24.65	329.26	277.63	391.21	619.09	455.09	421.14		419.02	473.36	462.42	397.34
9/18/06 18:45	24.65	329.26	277.63	391.19	619.09	455.09	421.13		419.02	473.36	462.42	397.34
9/18/06 19:00	24.65	329.25	277.63	391.19	619.10	455.09	421.10		419.02	473.36	462.43	397.34
9/18/06 19:15	24.66	329.24	277.63	391.19	619.10	455.09	421.09		419.02	473.36	462.42	397.33
9/18/06 19:30	24.66	329.24	277.63	391.19	619.10	455.09	421.08		419.02	473.36	462.43	397.34
9/18/06 19:45	24.67	329.24	277.64	391.19	619.10	455.10	421.06		419.02	473.36	462.43	397.34
9/18/06 20:00	24.68	329.23	277.64	391.19	619.11	455.10	421.05		419.02	473.35	462.43	397.34
9/18/06 20:15	24.68	329.23	277.65	391.19	619.11	455.10	421.05		419.03	473.35	462.43	397.35
9/18/06 20:30	24.69	329.23	277.65	391.19	619.11	455.10	421.04		419.03	473.35	462.44	397.35
9/18/06 20:45	24.69	329.23	277.66	391.19	619.11	455.11	421.04		419.03	473.35	462.45	397.33
9/18/06 21:00	24.70	329.23	277.66	391.19	619.11	455.11	421.04		419.03	473.35	462.45	397.33
9/18/06 21:15	24.70	329.23	277.66	391.19	619.12	455.11	421.03		419.04	473.35	462.45	397.35
9/18/06 21:30	24.70	329.23	277.67	391.19	619.12	455.11	421.03		419.04	473.35	462.46	397.35
9/18/06 21:45	24.70	329.23	277.67	391.19	619.12	455.12	421.03		419.04	473.36	462.46	397.35
9/18/06 22:00	24.70	329.23	277.67	391.18	619.12	455.12	421.03		419.04	473.36	462.46	397.35
9/18/06 22:15	24.70	329.24	277.67	391.18	619.12	455.12	421.03		419.04	473.36	462.46	397.35
9/18/06 22:30	24.70	329.24	277.67	391.18	619.12	455.12	421.03		419.04	473.36	462.46	397.35
9/18/06 22:45	24.70	329.24	277.67	391.18	619.12	455.12	421.03		419.04	473.36	462.46	397.35
9/18/06 23:00	24.70	329.24	277.67	391.18	619.12	455.12	421.03		419.04	473.37	462.46	397.34
9/18/06 23:15	24.70	329.24	277.67	391.16	619.12	455.12	421.03		419.04	473.37	462.46	397.35
9/18/06 23:30	24.69	329.24	277.67	391.16	619.13	455.12	421.03		419.04	473.37	462.46	397.34
9/18/06 23:45	24.69	329.25	277.67	391.16	619.12	455.12	421.03		419.04	473.37	462.46	397.34
9/19/06 0:00	24.69	329.24	277.67	391.16	619.12	455.11	421.03		419.04	473.37	462.46	397.34
9/19/06 0:15	24.69	329.25	277.67	391.16	619.12	455.12	421.03		419.04	473.37	462.46	397.33
9/19/06 0:30	24.69	329.24	277.67	391.14	619.12	455.11	421.03		419.04	473.37	462.46	397.33
9/19/06 0:45	24.69	329.24	277.67	391.14	619.12	455.12	421.02		419.04	473.37	462.46	397.33
9/19/06 1:00	24.68	329.25	277.67	391.14	619.12	455.11	421.03		419.03	473.37	462.46	397.33
9/19/06 1:15	24.68	329.25	277.67	391.13	619.12	455.11	421.03		419.03	473.37	462.45	397.33
9/19/06 1:30	24.68	329.25	277.67	391.13	619.12	455.10	421.03		419.03	473.37	462.45	397.32
9/19/06 1:45	24.67	329.25	277.67	391.11	619.11	455.10	421.03		419.03	473.38	462.45	397.31
9/19/06 2:00	24.67	329.25	277.66	391.11	619.11	455.10	421.03		419.02	473.37	462.45	397.30
9/19/06 2:15	24.67	329.25	277.66	391.11	619.11	455.10	421.03		419.02	473.37	462.45	397.31
9/19/06 2:30	24.67	329.25	277.66	391.10	619.11	455.10	421.03		419.02	473.37	462.44	397.30
9/19/06 2:45	24.67	329.25	277.66	391.10	619.11	455.09	421.03		419.02	473.37	462.44	397.30
9/19/06 3:00	24.67	329.26	277.66	391.10	619.10	455.09	421.03		419.02	473.37	462.44	397.29
9/19/06 3:15	24.67	329.25	277.65	391.10	619.10	455.09	421.02		419.01	473.37	462.44	397.30
9/19/06 3:30	24.66	329.25	277.65	391.08	619.10	455.09	421.03		419.01	473.37	462.44	397.29
9/19/06 3:45	24.66	329.25	277.65	391.08	619.10	455.09	421.03		419.01	473.37	462.43	397.29
9/19/06 4:00	24.66	329.25	277.65	391.08	619.10	455.08	421.03		419.01	473.37	462.44	397.28
9/19/06 4:15	24.67	329.24	277.65	391.08	619.10	455.08	421.02		419.01	473.36	462.44	397.28
9/19/06 4:30	24.67	329.25	277.66	391.06	619.10	455.08	421.03		419.01	473.36	462.44	397.28
9/19/06 4:45	24.66	329.25	277.65	391.06	619.10	455.08	421.03		419.01	473.37	462.44	397.27
9/19/06 5:00	24.66	329.25	277.65	391.06	619.10	455.08	421.03		419.01	473.36	462.44	397.28
9/19/06 5:15	24.66	329.25	277.65	391.06	619.10	455.08	421.04		419.01	473.37	462.44	397.27
9/19/06 5:30	24.66	329.26	277.65	391.05	619.09	455.08	421.04		419.00	473.37	462.44	397.27
9/19/06 5:45	24.66	329.26	277.66	391.05	619.09	455.08	421.04		419.00	473.37	462.44	397.26
9/19/06 6:00	24.66	329.26	277.66	391.05	619.10	455.08	421.04		419.01	473.37	462.44	397.26
9/19/06 6:15	24.66	329.26	277.66	391.05	619.10	455.09	421.03		419.01	473.37	462.45	397.26
9/19/06 6:30	24.66	329.26	277.67	391.05	619.10	455.09	421.02		419.01	473.37	462.45	397.27
9/19/06 6:45	24.67	329.26	277.67	391.05	619.10	455.09	421.01		419.01	473.37	462.46	397.27
9/19/06 7:00	24.67	329.25	277.67	391.05	619.11	455.09	421.01		419.02	473.36	462.46	397.27
9/19/06 7:15	24.68	329.26	277.68	391.05	619.11	455.10	421.01		419.02	473.36	462.46	397.27
9/19/06 7:30	24.68	329.26	277.68	391.05	619.12	455.10	421.02		419.03	473.36	462.47	397.27
9/19/06 7:45	24.68	329.27	277.69	391.05	619.12	455.11	421.05		419.03	473.36	462.47	397.28
9/19/06 8:00	24.67	329.27	277.69	391.03	619.12	455.11	421.08		419.03	473.37	462.48	397.29
9/19/06 8:15	24.67	329.28	277.69	391.03	619.13	455.11	421.10		419.03	473.37	462.49	397.27
9/19/06 8:30	24.67	329.29	277.70	391.03	619.13	455.11	421.12		419.04	473.37	462.49	397.28
9/19/06 8:45	24.67	329.29	277.70	391.03	619.13	455.12	421.13		419.04	473.37	462.49	397.29
9/19/06 9:00	24.66	329.31	277.70	391.03	619.14	455.12	421.15		419.04	473.38	462.49	397.29
9/19/06 9:15	24.66	329.31	277.71	391.03	619.14	455.12	421.17		419.04	473.38	462.50	397.29

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
9/19/06 9:30	24.65	329.31	277.71	391.03	619.14	455.12	421.19		419.04	473.38	462.49	397.29
9/19/06 9:45	24.65	329.32	277.70	391.03	619.15	455.13	421.21		419.05	473.38	462.50	397.29
9/19/06 10:00	24.64	329.33	277.71	391.03	619.15	455.13	421.22		419.05	473.39	462.51	397.29
9/19/06 10:15	24.64	329.33	277.72	391.03	619.15	455.13	421.23		419.05	473.39	462.51	397.30
9/19/06 10:30	24.64	329.34	277.72	391.03	619.15	455.13	421.24		419.05	473.39	462.51	397.28
9/19/06 10:45	24.63	329.34	277.72	391.01	619.15	455.13	421.26		419.05	473.40	462.51	397.29
9/19/06 11:00	24.63	329.35	277.72	391.01	619.15	455.13	421.26		419.05	473.40	462.51	397.29
9/19/06 11:15	24.63	329.35	277.72	391.01	619.15	455.13	421.28		419.06	473.40	462.51	397.29
9/19/06 11:30	24.63	329.36	277.72	391.01	619.15	455.13	421.29		419.05	473.40	462.51	397.29
9/19/06 11:45	24.62	329.36	277.72	391.01	619.15	455.13	421.31		419.05	473.41	462.51	397.28
9/19/06 12:00	24.61	329.37	277.72	391.00	619.15	455.13	421.32		419.05	473.41	462.50	397.28
9/19/06 12:15	24.60	329.38	277.72	391.00	619.15	455.13	421.34		419.05	473.41	462.50	397.28
9/19/06 12:30	24.60	329.38	277.71	391.00	619.15	455.13	421.35		419.05	473.42	462.51	397.27
9/19/06 12:45	24.59	329.39	277.71	390.98	619.15	455.13	421.36		419.04	473.42	462.50	397.27
9/19/06 13:00	24.58	329.39	277.71	390.98	619.14	455.12	421.36		419.04	473.42	462.50	397.26
9/19/06 13:15	24.57	329.39	277.70	390.98	619.14	455.11	421.35		419.03	473.42	462.50	397.25
9/19/06 13:30	24.56	329.40	277.70	390.96	619.13	455.11	421.40		419.02	473.42	462.50	397.25
9/19/06 13:45	24.55	329.40	277.70	390.96	619.13	455.11	421.37		419.03	473.42	462.49	397.25
9/19/06 14:00	24.55	329.40	277.70	390.95	619.13	455.11	421.39		419.03	473.42	462.48	397.25
9/19/06 14:15	24.54	329.40	277.69	390.95	619.13	455.10	421.39		419.02	473.42	462.48	397.23
9/19/06 14:30	24.54	329.40	277.68	390.93	619.12	455.10	421.32		419.02	473.42	462.48	397.24
9/19/06 14:45	24.53	329.40	277.68	390.93	619.12	455.09	421.31		419.01	473.42	462.47	397.23
9/19/06 15:00	24.53	329.41	277.68	390.91	619.11	455.09	421.29		419.01	473.42	462.47	397.22
9/19/06 15:15	24.53	329.40	277.67	390.91	619.11	455.08	421.28		419.01	473.42	462.46	397.21
9/19/06 15:30	24.52	329.40	277.67	390.91	619.11	455.08	421.28		419.00	473.42	462.46	397.21
9/19/06 15:45	24.52	329.40	277.67	390.90	619.10	455.08	421.28		419.00	473.42	462.46	397.21
9/19/06 16:00	24.51	329.40	277.66	390.90	619.10	455.07	421.28		418.99	473.42	462.46	397.20
9/19/06 16:15	24.50	329.41	277.66	390.88	619.10	455.07	421.27		418.99	473.42	462.45	397.20
9/19/06 16:30	24.51	329.40	277.66	390.88	619.09	455.06	421.26		418.98	473.42	462.45	397.19
9/19/06 16:45	24.51	329.39	277.65	390.88	619.09	455.06	421.22		418.98	473.42	462.45	397.18
9/19/06 17:00	24.51	329.39	277.65	390.86	619.09	455.05	421.21		418.98	473.42	462.45	397.18
9/19/06 17:15	24.51	329.40	277.65	390.86	619.09	455.06	421.24		418.98	473.42	462.43	397.18
9/19/06 17:30	24.51	329.39	277.65	390.85	619.08	455.05	421.22		418.97	473.42	462.43	397.17
9/19/06 17:45	24.52	329.39	277.65	390.85	619.08	455.05	421.22		418.97	473.42	462.44	397.17
9/19/06 18:00	24.52	329.39	277.65	390.85	619.09	455.05	421.20		418.97	473.41	462.43	397.16
9/19/06 18:15	24.52	329.38	277.65	390.85	619.08	455.05	421.19		418.97	473.41	462.43	397.17
9/19/06 18:30	24.52	329.38	277.65	390.85	619.08	455.05	421.17		418.97	473.42	462.43	397.16
9/19/06 18:45	24.53	329.37	277.64	390.83	619.08	455.05	421.15		418.97	473.42	462.44	397.16
9/19/06 19:00	24.53	329.36	277.64	390.83	619.08	455.05	421.12		418.97	473.42	462.43	397.16
9/19/06 19:15	24.53	329.36	277.65	390.83	619.08	455.05	421.11		418.97	473.42	462.43	397.16
9/19/06 19:30	24.53	329.36	277.64	390.83	619.08	455.05	421.10		418.97	473.42	462.44	397.15
9/19/06 19:45	24.54	329.35	277.65	390.83	619.08	455.05	421.10		418.97	473.42	462.43	397.15
9/19/06 20:00	24.54	329.35	277.65	390.83	619.07	455.05	421.09		418.97	473.42	462.44	397.16
9/19/06 20:15	24.54	329.35	277.65	390.81	619.08	455.05	421.09		418.97	473.42	462.44	397.15
9/19/06 20:30	24.55	329.36	277.65	390.81	619.08	455.05	421.09		418.97	473.43	462.44	397.15
9/19/06 20:45	24.54	329.36	277.65	390.81	619.08	455.05	421.09		418.98	473.43	462.45	397.15
9/19/06 21:00	24.55	329.36	277.65	390.81	619.08	455.05	421.08		418.98	473.43	462.45	397.15
9/19/06 21:15	24.54	329.36	277.66	390.81	619.08	455.05	421.08		418.98	473.44	462.45	397.15
9/19/06 21:30	24.55	329.37	277.65	390.81	619.08	455.05	421.08		418.98	473.44	462.45	397.15
9/19/06 21:45	24.54	329.36	277.66	390.81	619.08	455.05	421.09		418.98	473.44	462.45	397.14
9/19/06 22:00	24.55	329.36	277.66	390.80	619.09	455.06	421.08		418.98	473.44	462.46	397.15
9/19/06 22:15	24.54	329.36	277.66	390.80	619.09	455.06	421.08		418.98	473.45	462.45	397.15
9/19/06 22:30	24.54	329.37	277.66	390.80	619.08	455.05	421.08		418.98	473.45	462.45	397.15
9/19/06 22:45	24.54	329.37	277.66	390.80	619.08	455.05	421.09		418.98	473.46	462.45	397.16
9/19/06 23:00	24.54	329.37	277.66	390.80	619.09	455.06	421.09		418.98	473.46	462.45	397.14
9/19/06 23:15	24.54	329.37	277.66	390.80	619.08	455.06	421.09		418.98	473.46	462.46	397.14
9/19/06 23:30	24.54	329.37	277.66	390.78	619.08	455.06	421.09		418.98	473.46	462.46	397.14
9/19/06 23:45	24.53	329.37	277.67	390.78	619.08	455.05	421.09		418.98	473.47	462.46	397.14
9/20/06 0:00	24.53	329.37	277.66	390.78	619.09	455.05	421.09		418.98	473.47	462.46	397.14
9/20/06 0:15	24.53	329.38	277.66	390.78	619.08	455.05	421.08		418.98	473.47	462.46	397.12
9/20/06 0:30	24.53	329.38	277.66	390.78	619.08	455.05	421.08		418.97	473.47	462.46	397.13
9/20/06 0:45	24.53	329.38	277.66	390.77	619.08	455.05	421.08		418.98	473.47	462.46	397.12
9/20/06 1:00	24.53	329.38	277.65	390.77	619.08	455.05	421.08		418.97	473.47	462.45	397.12
9/20/06 1:15	24.53	329.38	277.65	390.77	619.08	455.04	421.08		418.97	473.47	462.45	397.11
9/20/06 1:30	24.52	329.38	277.65	390.75	619.08	455.04	421.07		418.97	473.47	462.45	397.11
9/20/06 1:45	24.52	329.37	277.65	390.75	619.08	455.04	421.07		418.97	473.41	462.45	397.11
9/20/06 2:00	24.52	329.37	277.65	390.75	619.08	455.04	421.07		418.96	473.41	462.44	397.11
9/20/06 2:15	24.52	329.37	277.64	390.73	619.07	455.03	421.06		418.96	473.41	462.44	397.10
9/20/06 2:30	24.51	329.38	277.64	390.73	619.07	455.03	421.06		418.96	473.41	462.44	397.10
9/20/06 2:45	24.51	329.37	277.64	390.72	619.07	455.02	421.06		418.95	473.41	462.43	397.10
9/20/06 3:00	24.51	329.37	277.64	390.72	619.06	455.03	421.06		418.95	473.41	462.43	397.08
9/20/06 3:15	24.50	329.38	277.63	390.72	619.06	455.02	421.06		418.95	473.41	462.43	397.09
9/20/06 3:30	24.50	329.37	277.63	390.70	619.06	455.01	421.05		418.94	473.41	462.43	397.08
9/20/06 3:45	24.50	329.37	277.63	390.70	619.06	455.01	421.05		418.94	473.41	462.43	397.08
9/20/06 4:00	24.50	329.38	277.62	390.68	619.05	455.01	421.05		418.94	473.41	462.42	397.07
9/20/06 4:15	24.49	329.38	277.62	390.68	619.05	455.01	421.05		418.94	473.41	462.42	397.06
9/20/06 4:30	24.49	329.37	277.62	390.68	619.05	455.01	421.05		418.93	473.41	462.41	397.06
9/20/06 4:45	24.49	329.37	277.62	390.67	619.05	455.00	421.04		418.94	473.41	462.41	397.06
9/20/06 5:00	24.49	329.37	277.62	390.67	619.05	455.00	421.04		418.93	473.41	462.41	397.05
9/20/06 5:15	24.49	329.37	277.62	390.67	619.05	455.00	421.05		418.93	473.41	462.41	397.05
9/20/06 5:30	24.49	329.37	277.61	390.67	619.05	455.00	421.04		418.93	473.41	462.41	397.05
9/20/06 5:45	24.49	329.37	277.61	390.65	619.05	455.00	421.05		418.93	473.41	462.41	397.05
9/20/06 6:00	24.48	329.37	277.61	390.65	619.05	455.00	421.04		418.93	473.42	462.41	397.04
9/20/06 6:15	24.48	329.38	277.61	390.65	619.05	454.99	421.04		418.93	473.42	462.41	397.03
9/20/06 6:30	24.48	329.38	277.61	390.65	619.05	454.99	421.05		418.92	473.41	462.41	397.03
9/20/06 6:45	24.47	329.38	277.61	390.65	619.05	455.00	421.05		418.93	473.41	462.41	397.03
9/20/06 7:00	24.48	329.38	277.62	390.65	619.05	455.00	421.05		418.93	473.41	462.41	397.03
9/20/06 7:15	24.47	329.38	277.61	390.63	619.05	455.00	421.06		418.93	473.42	462.41	397.03
9/20/06 7:30	24.47	329.39	277.62	390.65	619.05	455.00	421.08		418.93	473.42	462.41	397.03
9/20/06 7:45	24.47	329.40	277.62	390.63	619.05	455.00	421.11		418.93	473.42	462.42	397.03
9/20/06 8:00	24.46	329.40	277.62	390.63	619.05	455.00	421.14		418.93	473.42	462.42	397.03
9/20/06 8:15	24.46	329.41	277.62	390.63	619.05	455.01	421.17		418.93	473.43	462.41	397.03
9/20/06 8:30	24.45	329.42	277.63	390.63	619.05	455.01	421.19		418.94	473.43	462.43	397.03
9/20/06 8:45	24.44	329.43	277.63	390.63	619.06	455.01	421.22		418.94	473.43	462.43	397.03
9/20/06 9:00	24.43	329.44	277.63	390.63	619.06	455.01	421.24		418.94	473.44	462.43	397.04
9/20/06 9:15	24.42	329.45	277.63	390.63	619.06	455.01	421.25		418.94	473.44	462.43	397.03
9/20/06 9:30	24.42	329.46	277.63	390.63	619.06	455.02	421.29		418.94	473.44	462.44	397.03
9/20/06 9:45	24.41	329.46	277.64	390.63	619.07	455.01	421.20		418.94	473.44	462.43	397.03
9/20/06 10:00	24.40	329.44	277.63	390.62	619.07	455.01	421.16		418.95	473.44	462.45	397.03
9/20/06 10:15	24.40	329.44	277.64	390.62	619.07	455.01	421.19		418.94	473.44	462.45	397.03

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
9/20/06 10:30	24.39	329.44	277.64	390.62	619.08	455.03	421.20		418.95	473.44	462.44	397.03
9/20/06 10:45	24.39	329.44	277.64	390.62	619.08	455.03	421.21		418.94	473.45	462.45	397.03
9/20/06 11:00	24.38	329.44	277.64	390.62	619.08	455.04	421.25		418.95	473.45	462.46	397.04
9/20/06 11:15	24.38	329.44	277.64	390.62	619.08	455.03	421.27		418.95	473.45	462.46	397.03
9/20/06 11:30	24.37	329.44	277.64	390.60	619.08	455.02	421.19		418.95	473.45	462.46	397.03
9/20/06 11:45	24.37	329.44	277.64	390.60	619.08	455.02	420.99		418.95	473.45	462.46	397.04
9/20/06 12:00	24.37	329.44	277.65	390.60	619.09	455.03	421.01		418.95	473.46	462.46	397.03
9/20/06 12:15	24.37	329.44	277.65	390.60	619.08	455.02	421.03		418.95	473.46	462.46	397.02
9/20/06 12:30	24.36	329.44	277.63	390.58	619.08	455.02	421.02		418.95	473.46	462.46	397.02
9/20/06 12:45	24.36	329.44	277.64	390.58	619.08	455.03	421.01		418.95	473.40	462.46	397.02
9/20/06 13:00	24.36	329.44	277.63	390.58	619.08	455.03	421.07		418.95	473.40	462.46	397.02
9/20/06 13:15	24.35	329.44	277.64	390.58	619.08	455.02	421.08		418.95	473.40	462.46	397.02
9/20/06 13:30	24.34	329.44	277.63	390.57	619.07	455.01	420.97		418.93	473.41	462.44	397.01
9/20/06 13:45	24.34	329.43	277.63	390.57	619.07	455.02	420.95		418.94	473.41	462.45	397.01
9/20/06 14:00	24.33	329.43	277.63	390.57	619.07	455.01	420.94		418.93	473.40	462.44	397.01
9/20/06 14:15	24.33	329.42	277.61	390.55	619.06	455.00	420.94		418.94	473.40	462.43	397.00
9/20/06 14:30	24.34	329.42	277.62	390.55	619.06	455.00	420.95		418.93	473.40	462.44	396.99
9/20/06 14:45	24.34	329.42	277.62	390.55	619.06	455.00	420.95		418.93	473.40	462.43	396.99
9/20/06 15:00	24.34	329.41	277.62	390.53	619.05	454.99	420.94		418.93	473.40	462.42	396.97
9/20/06 15:15	24.35	329.41	277.61	390.53	619.05	454.99	420.95		418.92	473.40	462.43	396.98
9/20/06 15:30	24.35	329.41	277.60	390.53	619.05	454.99	420.97		418.92	473.40	462.42	396.97
9/20/06 15:45	24.35	329.40	277.60	390.52	619.05	454.98	420.93		418.91	473.39	462.42	396.96
9/20/06 16:00	24.35	329.40	277.60	390.52	619.05	454.98	420.91		418.92	473.39	462.42	396.97
9/20/06 16:15	24.35	329.40	277.60	390.52	619.04	454.98	420.91		418.91	473.39	462.41	396.96
9/20/06 16:30	24.35	329.39	277.59	390.50	619.04	454.98	420.90		418.91	473.39	462.41	396.96
9/20/06 16:45	24.35	329.39	277.60	390.50	619.03	454.98	420.93		418.91	473.39	462.41	396.95
9/20/06 17:00	24.35	329.38	277.59	390.50	619.03	454.97	420.94		418.90	473.39	462.41	396.95
9/20/06 17:15	24.34	329.38	277.59	390.48	619.03	454.97	420.92		418.90	473.39	462.41	396.95
9/20/06 17:30	24.35	329.38	277.58	390.48	619.03	454.96	420.89		418.90	473.38	462.41	396.94
9/20/06 17:45	24.35	329.38	277.59	390.48	619.03	454.96	420.87		418.89	473.38	462.40	396.93
9/20/06 18:00	24.36	329.38	277.59	390.48	619.03	454.96	420.87		418.90	473.38	462.41	396.93
9/20/06 18:15	24.36	329.38	277.59	390.47	619.03	454.96	420.86		418.89	473.38	462.40	396.93
9/20/06 18:30	24.37	329.38	277.59	390.47	619.03	454.96	420.87		418.90	473.37	462.40	396.93
9/20/06 18:45	24.38	329.38	277.59	390.47	619.03	454.97	420.88		418.90	473.37	462.41	396.93
9/20/06 19:00	24.38	329.38	277.59	390.47	619.03	454.97	420.89		418.90	473.37	462.41	396.93
9/20/06 19:15	24.39	329.39	277.59	390.47	619.03	454.97	420.89		418.90	473.36	462.41	396.93
9/20/06 19:30	24.39	329.39	277.59	390.47	619.03	454.97	420.88		418.90	473.37	462.41	396.93
9/20/06 19:45	24.39	329.39	277.60	390.47	619.04	454.97	420.89		418.90	473.37	462.41	396.93
9/20/06 20:00	24.40	329.39	277.60	390.47	619.04	454.98	420.89		418.91	473.36	462.41	396.93
9/20/06 20:15	24.40	329.39	277.61	390.45	619.04	454.98	420.88		418.91	473.37	462.42	396.93
9/20/06 20:30	24.41	329.40	277.60	390.45	619.04	454.98	420.88		418.92	473.36	462.43	396.93
9/20/06 20:45	24.41	329.40	277.61	390.47	619.05	454.98	420.88		418.92	473.36	462.43	396.93
9/20/06 21:00	24.41	329.40	277.61	390.47	619.05	454.99	420.89		418.92	473.37	462.43	396.93
9/20/06 21:15	24.41	329.40	277.61	390.47	619.06	454.99	420.89		418.92	473.37	462.43	396.93
9/20/06 21:30	24.41	329.40	277.61	390.45	619.05	454.99	420.90		418.93	473.37	462.43	396.93
9/20/06 21:45	24.41	329.41	277.62	390.47	619.06	455.00	420.90		418.93	473.37	462.44	396.93
9/20/06 22:00	24.41	329.41	277.62	390.47	619.06	455.00	420.91		418.93	473.38	462.43	396.93
9/20/06 22:15	24.40	329.40	277.62	390.45	619.06	455.00	420.91		418.92	473.38	462.44	396.94
9/20/06 22:30	24.40	329.40	277.62	390.45	619.06	454.99	420.90		418.92	473.39	462.44	396.93
9/20/06 22:45	24.40	329.40	277.61	390.45	619.06	454.99	420.91		418.93	473.39	462.44	396.93
9/20/06 23:00	24.39	329.40	277.62	390.45	619.06	454.99	420.90		418.92	473.40	462.44	396.93
9/20/06 23:15	24.39	329.40	277.62	390.45	619.06	454.99	420.91		418.92	473.40	462.43	396.92
9/20/06 23:30	24.39	329.40	277.61	390.45	619.06	454.99	420.91		418.92	473.40	462.44	396.92
9/20/06 23:45	24.39	329.40	277.61	390.45	619.06	454.99	420.91		418.92	473.40	462.43	396.92
9/21/06 0:00	24.39	329.40	277.62	390.44	619.06	454.99	420.91		418.93	473.40	462.43	396.91
9/21/06 0:15	24.39	329.41	277.61	390.44	619.06	454.99	420.91		418.93	473.40	462.44	396.91
9/21/06 0:30	24.39	329.40	277.62	390.44	619.06	454.99	420.91		418.93	473.40	462.44	396.91
9/21/06 0:45	24.39	329.40	277.62	390.44	619.06	454.99	420.91		418.93	473.40	462.43	396.91
9/21/06 1:00	24.39	329.40	277.61	390.42	619.06	454.99	420.92		418.93	473.41	462.43	396.91
9/21/06 1:15	24.38	329.40	277.61	390.42	619.05	454.99	420.92		418.92	473.41	462.43	396.91
9/21/06 1:30	24.37	329.39	277.61	390.42	619.05	454.99	420.93		418.92	473.42	462.43	396.91
9/21/06 1:45	24.37	329.39	277.60	390.40	619.05	454.98	420.92		418.91	473.35	462.43	396.90
9/21/06 2:00	24.36	329.38	277.60	390.40	619.04	454.98	420.93		418.91	473.35	462.42	396.90
9/21/06 2:15	24.36	329.38	277.59	390.39	619.04	454.97	420.93		418.90	473.36	462.42	396.89
9/21/06 2:30	24.35	329.37	277.59	390.39	619.03	454.97	420.92		418.90	473.36	462.41	396.88
9/21/06 2:45	24.35	329.37	277.59	390.37	619.04	454.97	420.92		418.90	473.35	462.41	396.88
9/21/06 3:00	24.35	329.36	277.58	390.37	619.03	454.96	420.92		418.89	473.35	462.41	396.87
9/21/06 3:15	24.35	329.36	277.58	390.37	619.03	454.96	420.92		418.89	473.35	462.41	396.87
9/21/06 3:30	24.34	329.36	277.58	390.37	619.03	454.95	420.91		418.89	473.35	462.40	396.87
9/21/06 3:45	24.34	329.35	277.57	390.35	619.02	454.95	420.91		418.88	473.35	462.40	396.86
9/21/06 4:00	24.33	329.35	277.57	390.35	619.02	454.95	420.91		418.88	473.35	462.41	396.85
9/21/06 4:15	24.33	329.35	277.57	390.34	619.01	454.94	420.91		418.88	473.35	462.40	396.85
9/21/06 4:30	24.33	329.34	277.57	390.34	619.01	454.94	420.92		418.88	473.35	462.40	396.84
9/21/06 4:45	24.32	329.34	277.56	390.34	619.01	454.94	420.91		418.87	473.35	462.38	396.83
9/21/06 5:00	24.32	329.33	277.56	390.32	619.01	454.93	420.91		418.87	473.35	462.38	396.82
9/21/06 5:15	24.32	329.33	277.55	390.32	619.01	454.93	420.91		418.87	473.35	462.39	396.82
9/21/06 5:30	24.32	329.33	277.55	390.32	619.00	454.93	420.91		418.87	473.35	462.39	396.82
9/21/06 5:45	24.32	329.33	277.55	390.30	619.00	454.93	420.91		418.87	473.35	462.39	396.82
9/21/06 6:00	24.32	329.33	277.55	390.30	619.00	454.93	420.91		418.86	473.35	462.38	396.82
9/21/06 6:15	24.32	329.33	277.55	390.30	619.00	454.93	420.91		418.86	473.35	462.38	396.82
9/21/06 6:30	24.31	329.33	277.55	390.30	619.00	454.92	420.91		418.86	473.35	462.38	396.81
9/21/06 6:45	24.32	329.33	277.55	390.29	619.00	454.92	420.91		418.86	473.35	462.38	396.81
9/21/06 7:00	24.31	329.33	277.54	390.29	619.00	454.92	420.91		418.86	473.35	462.38	396.81
9/21/06 7:15	24.31	329.32	277.54	390.29	619.00	454.92	420.91		418.86	473.35	462.38	396.80
9/21/06 7:30	24.31	329.32	277.55	390.29	619.00	454.92	420.92		418.86	473.35	462.38	396.79
9/21/06 7:45	24.31	329.32	277.55	390.29	619.00	454.93	420.92		418.86	473.34	462.39	396.81
9/21/06 8:00	24.31	329.33	277.55	390.29	619.01	454.93	420.95		418.87	473.35	462.40	396.79
9/21/06 8:15	24.31	329.33	277.55	390.29	619.01	454.93	420.96		418.87	473.35	462.38	396.80
9/21/06 8:30	24.30	329.33	277.55	390.29	619.01	454.93	420.97		418.87	473.35	462.39	396.80
9/21/06 8:45	24.30	329.33	277.55	390.27	619.01	454.93	420.98		418.87	473.36	462.39	396.80
9/21/06 9:00	24.29	329.33	277.55	390.27	619.01	454.93	420.99		418.88	473.37	462.40	396.80
9/21/06 9:15	24.28	329.33	277.56	390.27	619.01	454.93	421.00		418.87	473.38	462.40	396.79
9/21/06 9:30	24.28	329.33	277.55	390.27	619.01	454.93	421.00		418.87	473.38	462.40	396.80
9/21/06 9:45	24.27	329.33	277.56	390.25	619.01	454.94	421.01		418.88	473.30	462.40	396.80
9/21/06 10:00	24.27	329.33	277.54	390.27	619.02	454.93	420.97		418.87	473.31	462.41	396.80
9/21/06 10:15	24.26	329.34	277.56	390.27	619.02	454.93	420.91		418.87	473.31	462.41	396.79
9/21/06 10:30	24.26	329.34	277.55	390.25	619.02	454.94	420.90		418.88	473.32	462.41	396.80
9/21/06 10:45	24.25	329.34	277.56	390.25	619.02	454.94	420.90		418.88	473.32	462.41	396.80
9/21/06 11:00	24.24	329.34	277.56	390.25	619.02	454.95	420.92		418.87	473.33	462.41	396.79
9/21/06 11:15	24.25	329.33	277.55	390.25	619.02	454.94	420.92		418.88	473.33	462.41	396.79

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
9/21/06 11:30	24.24	329.33	277.55	390.25	619.02	454.94	420.94		418.88	473.34	462.41	396.79
9/21/06 11:45	24.24	329.33	277.55	390.25	619.02	454.93	420.93		418.88	473.35	462.41	396.79
9/21/06 12:00	24.24	329.33	277.56	390.24	619.02	454.94	420.92		418.88	473.34	462.41	396.78
9/21/06 12:15	24.23	329.33	277.56	390.25	619.02	454.94	420.92		418.88	473.34	462.41	396.79
9/21/06 12:30	24.23	329.33	277.55	390.24	619.02	454.94	420.92		418.88	473.35	462.41	396.78
9/21/06 12:45	24.22	329.33	277.55	390.24	619.02	454.94	420.92		418.88	473.35	462.41	396.78
9/21/06 13:00	24.22	329.33	277.56	390.24	619.02	454.94	420.92		418.87	473.35	462.41	396.78
9/21/06 13:15	24.21	329.32	277.55	390.22	619.01	454.93	420.93		418.87	473.36	462.41	396.77
9/21/06 13:30	24.21	329.32	277.55	390.22	619.01	454.94	420.97		418.88	473.36	462.41	396.76
9/21/06 13:45	24.20	329.32	277.53	390.20	619.01	454.92	420.94		418.88	473.35	462.40	396.77
9/21/06 14:00	24.20	329.32	277.54	390.19	619.00	454.92	420.94		418.87	473.36	462.40	396.76
9/21/06 14:15	24.21	329.31	277.53	390.20	619.00	454.92	420.92		418.86	473.36	462.39	396.75
9/21/06 14:30	24.20	329.31	277.53	390.20	619.00	454.92	420.91		418.87	473.35	462.39	396.75
9/21/06 14:45	24.20	329.31	277.53	390.19	618.99	454.91	420.90		418.86	473.35	462.40	396.74
9/21/06 15:00	24.20	329.31	277.53	390.19	618.99	454.91	420.89		418.86	473.35	462.39	396.73
9/21/06 15:15	24.20	329.30	277.52	390.17	618.99	454.91	420.89		418.86	473.34	462.38	396.73
9/21/06 15:30	24.21	329.30	277.52	390.17	618.99	454.91	420.87		418.85	473.34	462.38	396.73
9/21/06 15:45	24.22	329.30	277.52	390.17	618.99	454.90	420.86		418.84	473.34	462.38	396.73
9/21/06 16:00	24.22	329.30	277.52	390.17	618.99	454.90	420.87		418.85	473.33	462.38	396.72
9/21/06 16:15	24.22	329.30	277.52	390.17	618.99	454.90	420.86		418.84	473.33	462.38	396.72
9/21/06 16:30	24.23	329.30	277.53	390.15	618.99	454.90	420.88		418.86	473.33	462.38	396.72
9/21/06 16:45	24.23	329.29	277.52	390.15	618.99	454.89	420.85		418.84	473.32	462.38	396.72
9/21/06 17:00	24.23	329.29	277.53	390.15	618.99	454.90	420.88		418.85	473.32	462.38	396.72
9/21/06 17:15	24.24	329.29	277.52	390.15	618.98	454.90	420.89		418.84	473.32	462.38	396.72
9/21/06 17:30	24.24	329.29	277.52	390.15	618.98	454.89	420.85		418.83	473.31	462.38	396.72
9/21/06 17:45	24.24	329.29	277.52	390.15	618.99	454.90	420.85		418.84	473.31	462.37	396.72
9/21/06 18:00	24.24	329.29	277.53	390.14	618.98	454.89	420.84		418.83	473.31	462.38	396.72
9/21/06 18:15	24.25	329.29	277.52	390.14	618.98	454.89	420.84		418.84	473.30	462.38	396.70
9/21/06 18:30	24.25	329.29	277.52	390.14	618.98	454.89	420.84		418.83	473.30	462.37	396.71
9/21/06 18:45	24.25	329.29	277.52	390.14	618.99	454.89	420.85		418.84	473.30	462.38	396.70
9/21/06 19:00	24.25	329.29	277.52	390.14	618.99	454.90	420.83		418.83	473.30	462.37	396.70
9/21/06 19:15	24.26	329.28	277.52	390.14	618.98	454.89	420.85		418.84	473.30	462.38	396.71
9/21/06 19:30	24.26	329.29	277.53	390.14	618.99	454.90	420.85		418.84	473.29	462.38	396.71
9/21/06 19:45	24.27	329.29	277.53	390.14	619.00	454.90	420.86		418.84	473.29	462.38	396.71
9/21/06 20:00	24.27	329.29	277.53	390.14	619.00	454.91	420.87		418.85	473.29	462.38	396.71
9/21/06 20:15	24.27	329.29	277.53	390.12	619.00	454.91	420.88		418.85	473.29	462.39	396.71
9/21/06 20:30	24.27	329.29	277.53	390.14	619.00	454.91	420.88		418.85	473.30	462.39	396.71
9/21/06 20:45	24.27	329.29	277.53	390.12	619.01	454.91	420.88		418.85	473.30	462.39	396.72
9/21/06 21:00	24.27	329.30	277.53	390.14	619.01	454.91	420.88		418.85	473.30	462.40	396.71
9/21/06 21:15	24.28	329.30	277.54	390.14	619.01	454.92	420.88		418.86	473.30	462.40	396.71
9/21/06 21:30	24.28	329.31	277.54	390.14	619.01	454.93	420.89		418.86	473.30	462.41	396.72
9/21/06 21:45	24.28	329.31	277.54	390.14	619.02	454.93	420.89		418.86	473.30	462.41	396.72
9/21/06 22:00	24.28	329.31	277.55	390.14	655.06	454.93	420.89		418.87	473.30	462.41	396.72
9/21/06 22:15	24.29	329.31	277.55	390.14	655.06	454.94	420.89		418.87	473.30	462.42	396.72
9/21/06 22:30	24.29	329.32	277.55	390.14	655.06	454.94	420.90		418.88	473.30	462.42	396.72
9/21/06 22:45	24.29	329.32	277.56	390.14	655.06	454.94	420.91		418.88	473.30	462.42	396.72
9/21/06 23:00	24.28	329.32	277.55	390.14	655.06	454.95	420.91		418.88	473.31	462.42	396.72
9/21/06 23:15	24.28	329.31	277.56	390.14	655.06	454.94	420.91		418.88	473.31	462.42	396.72
9/21/06 23:30	24.28	329.32	277.56	390.14	655.06	454.94	420.92		418.88	473.31	462.43	396.72
9/21/06 23:45	24.29	329.32	277.55	390.12	655.06	454.94	420.92		418.88	473.31	462.43	396.72
9/22/06 0:00	24.29	329.32	277.56	390.14	655.06	454.95	420.91		418.89	473.31	462.43	396.72
9/22/06 0:15	24.28	329.32	277.55	390.14	655.06	454.95	420.90		418.89	473.31	462.43	396.72
9/22/06 0:30	24.28	329.32	277.56	390.14	655.06	454.95	420.91		418.89	473.31	462.43	396.72
9/22/06 0:45	24.28	329.32	277.56	390.12	655.06	454.95	420.91		418.89	473.31	462.43	396.72
9/22/06 1:00	24.29	329.32	277.57	390.12	655.06	454.95	420.91		418.88	473.31	462.43	396.72
9/22/06 1:15	24.29	329.32	277.56	390.12	655.06	454.95	420.91		418.89	473.31	462.43	396.72
9/22/06 1:30	24.29	329.32	277.56	390.12	655.06	454.95	420.91		418.88	473.31	462.43	396.72
9/22/06 1:45	24.29	329.32	277.56	390.12	655.06	454.95	420.91		418.88	473.31	462.43	396.72
9/22/06 2:00	24.29	329.32	277.56	390.12	655.06	454.95	420.90		418.88	473.31	462.43	396.71
9/22/06 2:15	24.29	329.31	277.56	390.10	655.06	454.95	420.90		418.88	473.31	462.43	396.71
9/22/06 2:30	24.29	329.31	277.55	390.10	655.06	454.95	420.89		418.88	473.30	462.42	396.71
9/22/06 2:45	24.29	329.31	277.55	390.10	655.06	454.94	420.89		418.88	473.30	462.43	396.70
9/22/06 3:00	24.29	329.31	277.55	390.10	655.06	454.94	420.90		418.88	473.30	462.42	396.70
9/22/06 3:15	24.29	329.31	277.55	390.09	655.06	454.94	420.89		418.87	473.30	462.42	396.69
9/22/06 3:30	24.29	329.30	277.55	390.09	655.06	454.94	420.89		418.88	473.29	462.42	396.69
9/22/06 3:45	24.29	329.30	277.54	390.07	655.06	454.93	420.89		418.87	473.29	462.42	396.68
9/22/06 4:00	24.30	329.30	277.54	390.07	655.06	454.93	420.89		418.88	473.28	462.41	396.68
9/22/06 4:15	24.29	329.29	277.54	390.07	655.06	454.93	420.89		418.86	473.28	462.41	396.68
9/22/06 4:30	24.29	329.29	277.54	390.07	655.06	454.93	420.88		418.86	473.28	462.41	396.67
9/22/06 4:45	24.30	329.29	277.53	390.06	655.06	454.93	420.88		418.86	473.28	462.41	396.67
9/22/06 5:00	24.30	329.29	277.54	390.06	655.06	454.92	420.88		418.86	473.27	462.41	396.67
9/22/06 5:15	24.30	329.29	277.54	390.06	655.06	454.92	420.88		418.86	473.27	462.41	396.67
9/22/06 5:30	24.30	329.29	277.53	390.06	655.06	454.92	420.89		418.86	473.27	462.41	396.67
9/22/06 5:45	24.31	329.29	277.54	390.04	655.06	454.92	420.88		418.86	473.26	462.41	396.66
9/22/06 6:00	24.31	329.29	277.53	390.04	655.06	454.92	420.87		418.86	473.26	462.41	396.65
9/22/06 6:15	24.31	329.29	277.53	390.04	655.06	454.92	420.87		418.85	473.25	462.41	396.66
9/22/06 6:30	24.32	329.29	277.53	390.04	655.06	454.92	420.87		418.86	473.25	462.41	396.65
9/22/06 6:45	24.31	329.28	277.54	390.04	655.06	454.92	420.88		418.87	473.25	462.41	396.65
9/22/06 7:00	24.32	329.30	277.53	390.04	655.06	454.92	420.87		418.86	473.25	462.41	396.65
9/22/06 7:15	24.32	329.29	277.53	390.02	655.06	454.92	420.87		418.86	473.24	462.41	396.65
9/22/06 7:30	24.33	329.30	277.54	390.04	655.06	454.93	420.86		418.86	473.24	462.42	396.65
9/22/06 7:45	24.33	329.30	277.54	390.04	655.06	454.94	420.87		418.87	473.24	462.42	396.66
9/22/06 8:00	24.34	329.30	277.54	390.02	655.06	454.93	420.87		418.86	473.23	462.43	396.64
9/22/06 8:15	24.34	329.30	277.54	390.02	655.06	454.93	420.88		418.88	473.24	462.43	396.66
9/22/06 8:30	24.34	329.31	277.55	390.04	655.06	454.94	420.87		418.88	473.24	462.43	396.65
9/22/06 8:45	24.35	329.31	277.55	390.04	655.06	454.94	420.88		418.88	473.24	462.43	396.65
9/22/06 9:00	24.35	329.31	277.56	390.04	655.06	454.93	420.88		418.88	473.24	462.43	396.64
9/22/06 9:15	24.35	329.31	277.57	390.04	655.06	454.94	420.88		418.88	473.24	462.43	396.64
9/22/06 9:30	24.35	329.31	277.56	390.04	655.06	454.95	420.90		418.88	473.24	462.45	396.66
9/22/06 9:45	24.36	329.32	277.56	390.02	655.06	454.93	420.89		418.89	473.24	462.44	396.67
9/22/06 10:00	24.35	329.32	277.56	390.04	655.06	454.94	420.91		418.89	473.24	462.45	396.66
9/22/06 10:15	24.36	329.31	277.55	390.02	655.06	454.95	420.90		418.89	473.25	462.45	396.67
9/22/06 10:30	24.36	329.31	277.57	390.02	655.06	454.96	420.90		418.89	473.24	462.46	396.67
9/22/06 10:45	24.37	329.31	277.57	390.04	655.06	454.97	420.91		418.91	473.24	462.47	396.65
9/22/06 11:00	24.37	329.31	277.58	390.02	655.06	454.97	420.91		418.89	473.24	462.47	396.67
9/22/06 11:15	24.38	329.31	277.59	390.04	655.06	454.96	420.90		418.91	473.24	462.47	396.67
9/22/06 11:30	24.38	329.31	277.58	390.04	655.06	454.98	420.91		418.92	473.25	462.48	396.66
9/22/06 11:45	24.38	329.31	277.59	390.02	655.06	454.99	420.92		418.91	473.25	462.49	396.67
9/22/06 12:00	24.39	329.31	277.59	390.04	655.06	454.98	420.92		418.93	473.24	462.49	396.67
9/22/06 12:15	24.38	329.31	277.60	390.04	655.06	454.98	420.93		418.92	473.24	462.49	396.67

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
9/22/06 12:30	24.39	329.31	277.60	390.04	655.06	455.01	420.95		418.92	473.24	462.49	396.67
9/22/06 12:45	24.40	329.30	277.60	390.06	655.06	454.99	420.95		418.91	473.24	462.50	396.67
9/22/06 13:00	24.40	329.30	277.59	390.06	655.06	455.01	420.95		418.93	473.24	462.50	396.68
9/22/06 13:15	24.39	329.31	277.60	390.04	655.06	454.99	420.96		418.93	473.24	462.50	396.68
9/22/06 13:30	24.40	329.31	277.60	390.06	655.06	455.00	420.99		418.93	473.24	462.50	396.67
9/22/06 13:45	24.40	329.31	277.60	390.06	655.06	455.00	420.98		418.93	473.24	462.50	396.68
9/22/06 14:00	24.40	329.30	277.60	390.06	655.06	455.00	420.97		418.92	473.23	462.50	396.67
9/22/06 14:15	24.40	329.30	277.60	390.04	655.06	455.00	420.97		418.93	473.23	462.50	396.67
9/22/06 14:30	24.40	329.30	277.60	390.04	655.06	455.00	420.98		418.93	473.23	462.50	396.67
9/22/06 14:45	24.41	329.29	277.61	390.04	655.06	455.01	420.96		418.94	473.22	462.50	396.67
9/22/06 15:00	24.41	329.29	277.60	390.04	655.06	455.00	420.96		418.93	473.22	462.50	396.67
9/22/06 15:15	24.42	329.28	277.60	390.04	655.06	455.00	420.95		418.93	473.21	462.51	396.67
9/22/06 15:30	24.42	329.26	277.60	390.04	655.06	455.01	420.94		418.93	473.21	462.51	396.67
9/22/06 15:45	24.43	329.26	277.60	390.04	655.06	455.00	420.93		418.94	473.20	462.51	396.67
9/22/06 16:00	24.43	329.26	277.60	390.02	655.06	455.00	420.93		418.93	473.20	462.51	396.67
9/22/06 16:15	24.43	329.25	277.60	390.02	655.06	455.00	420.92		418.93	473.19	462.50	396.66
9/22/06 16:30	24.44	329.24	277.60	390.02	655.06	455.00	420.93		418.93	473.19	462.50	396.66
9/22/06 16:45	24.45	329.24	277.60	390.02	655.06	455.00	420.94		418.93	473.18	462.50	396.66
9/22/06 17:00	24.45	329.23	277.59	390.02	655.06	454.99	420.94		418.93	473.18	462.50	396.66
9/22/06 17:15	24.45	329.23	277.60	390.01	655.06	455.00	420.94		418.93	473.17	462.50	396.66
9/22/06 17:30	24.46	329.22	277.59	390.01	655.06	454.99	420.93		418.93	473.17	462.50	396.66
9/22/06 17:45	24.47	329.22	277.59	390.01	655.06	455.00	420.94		418.94	473.16	462.50	396.66
9/22/06 18:00	24.47	329.22	277.60	390.01	655.06	455.00	420.93		418.93	473.16	462.51	396.66
9/22/06 18:15	24.47	329.21	277.60	389.99	655.06	455.00	420.92		418.93	473.15	462.51	396.65
9/22/06 18:30	24.48	329.20	277.61	390.01	655.06	455.00	420.93		418.94	473.16	462.51	396.66
9/22/06 18:45	24.49	329.20	277.60	389.99	655.06	455.00	420.94		418.93	473.15	462.51	396.65
9/22/06 19:00	24.49	329.19	277.59	390.01	655.06	455.01	420.94		418.94	473.14	462.51	396.65
9/22/06 19:15	24.49	329.20	277.60	390.01	655.06	455.00	420.95		418.94	473.18	462.52	396.66
9/22/06 19:30	24.50	329.20	277.60	390.01	655.06	455.01	420.93		418.94	473.22	462.51	396.65
9/22/06 19:45	24.50	329.19	277.60	389.99	655.06	455.01	420.94		418.94	473.22	462.51	396.65
9/22/06 20:00	24.50	329.18	277.60	389.99	655.06	455.01	420.95		418.94	473.22	462.52	396.66
9/22/06 20:15	24.51	329.19	277.60	389.99	655.06	455.02	420.95		418.95	473.21	462.52	396.66
9/22/06 20:30	24.51	329.19	277.60	389.99	655.06	455.02	420.95		418.95	473.22	462.53	396.66
9/22/06 20:45	24.51	329.19	277.62	390.01	655.06	455.03	420.95		418.95	473.21	462.53	396.66
9/22/06 21:00	24.52	329.18	277.62	390.01	655.06	455.02	420.95		418.95	473.21	462.54	396.66
9/22/06 21:15	24.52	329.18	277.62	390.01	655.06	455.03	420.96		418.96	473.21	462.54	396.66
9/22/06 21:30	24.53	329.18	277.62	390.01	655.06	455.04	420.96		418.94	473.21	462.54	396.66
9/22/06 21:45	24.53	329.17	277.63	390.01	655.06	455.04	420.97		418.93	473.21	462.54	396.67
9/22/06 22:00	24.53	329.17	277.63	390.01	655.06	455.04	420.96		418.74	473.21	462.55	396.66
9/22/06 22:15	24.53	329.17	277.63	390.01	655.06	455.04	420.96		418.71	473.21	462.55	396.67
9/22/06 22:30	24.53	329.18	277.63	390.01	655.06	455.05	420.97		418.68	473.21	462.55	396.67
9/22/06 22:45	24.54	329.17	277.63	390.01	655.06	455.05	420.97		418.65	473.21	462.55	396.67
9/22/06 23:00	24.54	329.17	277.63	390.01	655.06	455.05	420.98		418.64	473.21	462.55	396.67
9/22/06 23:15	24.54	329.17	277.64	390.01	655.06	455.06	420.98		418.62	473.21	462.56	396.67
9/22/06 23:30	24.55	329.17	277.64	390.01	655.06	455.06	420.98		418.62	473.21	462.56	396.67
9/22/06 23:45	24.55	329.17	277.64	390.01	655.06	455.06	420.99		418.60	473.21	462.56	396.67
9/23/06 0:00	24.56	329.16	277.65	390.01	655.06	455.07	420.98		418.60	473.21	462.57	396.67
9/23/06 0:15	24.56	329.16	277.64	389.99	655.06	455.06	420.99		418.59	473.21	462.57	396.67
9/23/06 0:30	24.56	329.16	277.65	389.99	655.06	455.06	420.99		418.58	473.22	462.57	396.67
9/23/06 0:45	24.56	329.15	277.64	390.01	655.06	455.07	420.99		418.57	473.28	462.57	396.67
9/23/06 1:00	24.57	329.15	277.65	389.99	655.06	455.07	421.00		418.57	473.28	462.57	396.67
9/23/06 1:15	24.58	329.15	277.65	390.01	655.06	455.08	421.00		418.56	473.28	462.57	396.67
9/23/06 1:30	24.57	329.15	277.64	389.99	655.06	455.08	420.99		418.56	473.28	462.57	396.67
9/23/06 1:45	24.58	329.14	277.64	389.99	655.06	455.08	420.99		418.55	473.27	462.58	396.67
9/23/06 2:00	24.59	329.13	277.64	389.99	655.06	455.07	420.99		418.54	473.26	462.57	396.67
9/23/06 2:15	24.59	329.13	277.65	389.99	655.06	455.08	420.99		418.53	473.26	462.57	396.67
9/23/06 2:30	24.59	329.12	277.64	389.99	655.06	455.08	420.98		418.53	473.25	462.57	396.67
9/23/06 2:45	24.60	329.12	277.64	389.97	655.06	455.08	420.99		418.51	473.25	462.57	396.66
9/23/06 3:00	24.61	329.11	277.64	389.99	655.06	455.08	420.98		418.51	473.24	462.57	396.66
9/23/06 3:15	24.60	329.11	277.64	389.99	655.06	455.07	420.98		418.51	473.24	462.57	396.67
9/23/06 3:30	24.60	329.10	277.64	389.97	655.06	455.07	420.98		418.50	473.24	462.57	396.66
9/23/06 3:45	24.61	329.10	277.64	389.97	655.06	455.07	420.97		418.49	473.23	462.57	396.66
9/23/06 4:00	24.62	329.09	277.64	389.96	655.06	455.06	420.98		418.49	473.23	462.57	396.65
9/23/06 4:15	24.62	329.08	277.63	389.96	655.06	455.07	420.97		418.48	473.22	462.56	396.64
9/23/06 4:30	24.62	329.08	277.64	389.96	655.06	455.06	420.97		418.47	473.22	462.57	396.64
9/23/06 4:45	24.63	329.07	277.63	389.96	655.06	455.06	420.97		418.46	473.22	462.57	396.64
9/23/06 5:00	24.64	329.06	277.63	389.96	655.06	455.06	420.97		418.43	473.28	462.57	396.64
9/23/06 5:15	24.64	329.06	277.63	389.96	655.06	455.06	420.99		418.43	473.27	462.57	396.64
9/23/06 5:30	24.64	329.05	277.63	389.94	655.06	455.06	420.98		418.41	473.26	462.56	396.64
9/23/06 5:45	24.65	329.05	277.63	389.94	655.06	455.06	420.98		418.40	473.26	462.56	396.64
9/23/06 6:00	24.66	329.04	277.63	389.94	655.06	455.06	420.99		418.40	473.25	462.56	396.63
9/23/06 6:15	24.67	329.03	277.63	389.94	655.06	455.06	420.99		418.40	473.25	462.57	396.64
9/23/06 6:30	24.67	329.03	277.63	389.94	655.06	455.06	420.99		418.39	473.25	462.57	396.63
9/23/06 6:45	24.68	329.02	277.63	389.94	655.06	455.07	420.99		418.39	473.24	462.57	396.63
9/23/06 7:00	24.68	329.02	277.64	389.94	655.06	455.07	420.99		418.38	473.24	462.57	396.62
9/23/06 7:15	24.69	329.01	277.63	389.94	655.06	455.07	420.99		418.38	473.23	462.57	396.63
9/23/06 7:30	24.70	329.01	277.64	389.96	655.06	455.08	420.99		418.37	473.29	462.58	396.64
9/23/06 7:45	24.71	329.00	277.64	389.94	655.06	455.08	421.00		418.35	473.28	462.59	396.63
9/23/06 8:00	24.71	329.00	277.64	389.94	655.06	455.08	421.00		418.37	473.28	462.58	396.64
9/23/06 8:15	24.71	328.99	277.65	389.94	655.06	455.09	421.00		418.36	473.28	462.59	396.63
9/23/06 8:30	24.72	328.99	277.65	389.94	655.06	455.09	421.00		418.37	473.28	462.59	396.64
9/23/06 8:45	24.73	328.99	277.65	389.94	655.06	455.09	421.00		418.37	473.28	462.59	396.64
9/23/06 9:00	24.74	328.99	277.66	389.94	655.06	455.10	421.01		418.37	473.31	462.60	396.65
9/23/06 9:15	24.74	328.99	277.66	389.94	655.06	455.10	421.01		418.36	473.31	462.61	396.64
9/23/06 9:30	24.75	328.98	277.66	389.94	655.06	455.11	421.02		418.36	473.31	462.61	396.65
9/23/06 9:45	24.75	328.98	277.67	389.94	655.06	455.12	421.02		418.36	473.30	462.62	396.65
9/23/06 10:00	24.76	328.98	277.67	389.96	655.06	455.12	421.03		418.36	473.30	462.62	396.66
9/23/06 10:15	24.76	328.98	277.68	389.96	655.06	455.12	421.04		418.38	473.30	462.62	396.67
9/23/06 10:30	24.76	328.98	277.68	389.96	655.06	455.13	421.05		418.37	473.31	462.63	396.67
9/23/06 10:45	24.77	328.98	277.69	389.96	655.06	455.13	421.05		418.38	473.30	462.63	396.66
9/23/06 11:00	24.77	328.97	277.69	389.96	655.06	455.14	421.06		418.38	473.30	462.64	396.67
9/23/06 11:15	24.78	328.97	277.70	389.96	655.06	455.14	421.06		418.38	473.30	462.65	396.67
9/23/06 11:30	24.79	328.97	277.70	389.96	655.06	455.15	421.06		418.38	473.30	462.65	396.67
9/23/06 11:45	24.79	328.97	277.70	389.96	655.06	455.15	421.06		418.37	473.30	462.65	396.67
9/23/06 12:00	24.79	328.97	277.70	389.97	655.06	455.15	421.06		418.38	473.30	462.66	396.67
9/23/06 12:15	24.79	328.97	277.71	389.96	655.06	455.16	421.06		418.37	473.31	462.66	396.68
9/23/06 12:30	24.80	328.97	277.71	389.96	655.06	455.16	421.08		418.37	473.31	462.66	396.67
9/23/06 12:45	24.80	328.97	277.71	389.96	655.06	455.16	421.08		418.38	473.32	462.66	396.68
9/23/06 13:00	24.80	328.97	277.71	389.96	655.06	455.16	421.09		418.39	473.31	462.66	396.68
9/23/06 13:15	24.80	328.97	277.71	389.97	655.06	455.16	421.12		418.40	473.31	462.66	396.67

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
9/23/06 13:30	24.80	328.97	277.72	389.97	655.06	455.17	421.13		418.41	473.32	462.67	396.67
9/23/06 13:45	24.80	328.97	277.71	389.97	655.06	455.17	421.12		418.42	473.32	462.67	396.67
9/23/06 14:00	24.79	328.97	277.72	389.96	655.06	455.17	421.14		418.42	473.32	462.67	396.67
9/23/06 14:15	24.80	328.97	277.71	389.96	655.06	455.16	421.11		418.42	473.31	462.67	396.67
9/23/06 14:30	24.79	328.97	277.71	389.96	655.06	455.16	421.11		418.43	473.31	462.67	396.67
9/23/06 14:45	24.79	328.98	277.71	389.96	655.06	455.17	421.14		418.45	473.32	462.67	396.67
9/23/06 15:00	24.78	328.98	277.70	389.96	655.06	455.16	421.13		418.45	473.31	462.67	396.66
9/23/06 15:15	24.79	328.98	277.70	389.96	655.06	455.16	421.13		418.46	473.31	462.66	396.66
9/23/06 15:30	24.78	328.98	277.70	389.94	655.06	455.16	421.13		418.46	473.31	462.65	396.65
9/23/06 15:45	24.78	328.98	277.69	389.94	655.06	455.15	421.13		418.45	473.31	462.65	396.65
9/23/06 16:00	24.78	328.97	277.69	389.92	655.06	455.15	421.10		418.43	473.31	462.65	396.65
9/23/06 16:15	24.78	328.97	277.69	389.94	655.06	455.15	421.09		418.42	473.31	462.65	396.64
9/23/06 16:30	24.78	328.97	277.69	389.92	655.06	455.15	421.09		418.41	473.30	462.65	396.64
9/23/06 16:45	24.78	328.96	277.69	389.92	655.06	455.15	421.08		418.41	473.30	462.65	396.63
9/23/06 17:00	24.78	328.95	277.68	389.92	655.06	455.15	421.07		418.41	473.30	462.65	396.63
9/23/06 17:15	24.79	328.95	277.68	389.92	655.06	455.15	421.07		418.40	473.30	462.65	396.63
9/23/06 17:30	24.78	328.95	277.68	389.92	655.06	455.14	421.07		418.40	473.29	462.65	396.63
9/23/06 17:45	24.79	328.95	277.68	389.91	655.06	455.14	421.07		418.40	473.29	462.65	396.62
9/23/06 18:00	24.79	328.95	277.67	389.91	655.06	455.14	421.06		418.38	473.29	462.65	396.62
9/23/06 18:15	24.79	328.95	277.68	389.91	655.06	455.14	421.07		418.34	473.29	462.65	396.62
9/23/06 18:30	24.79	328.94	277.67	389.91	655.06	455.14	421.07		418.34	473.29	462.64	396.62
9/23/06 18:45	24.79	328.94	277.67	389.89	655.06	455.14	421.05		418.35	473.29	462.65	396.62
9/23/06 19:00	24.79	328.93	277.67	389.89	655.06	455.14	421.05		418.35	473.29	462.64	396.62
9/23/06 19:15	24.79	328.93	277.67	389.89	655.06	455.14	421.05		418.34	473.28	462.64	396.62
9/23/06 19:30	24.79	328.93	277.67	389.89	655.06	455.14	421.06		418.34	473.29	462.64	396.61
9/23/06 19:45	24.79	328.93	277.67	389.89	655.06	455.14	421.05		418.33	473.29	462.64	396.62
9/23/06 20:00	24.79	328.92	277.67	389.89	655.06	455.14	421.05		418.32	473.29	462.64	396.61
9/23/06 20:15	24.79	328.92	277.67	389.89	655.06	455.14	421.05		418.32	473.29	462.65	396.61
9/23/06 20:30	24.80	328.92	277.67	389.89	655.06	455.14	421.05		418.30	473.28	462.64	396.62
9/23/06 20:45	24.81	328.92	277.67	389.89	655.06	455.14	421.05		418.31	473.28	462.65	396.61
9/23/06 21:00	24.81	328.91	277.68	389.89	655.06	455.15	421.06		418.31	473.29	462.65	396.62
9/23/06 21:15	24.81	328.91	277.68	389.89	655.06	455.15	421.06		418.30	473.29	462.65	396.62
9/23/06 21:30	24.81	328.91	277.69	389.89	655.06	455.15	421.06		418.30	473.29	462.65	396.62
9/23/06 21:45	24.82	328.91	277.69	389.89	655.06	455.16	421.07		418.29	473.29	462.65	396.62
9/23/06 22:00	24.82	328.92	277.69	389.89	655.06	455.16	421.07		418.30	473.29	462.66	396.62
9/23/06 22:15	24.81	328.92	277.69	389.89	655.06	455.16	421.08		418.30	473.29	462.67	396.62
9/23/06 22:30	24.82	328.92	277.69	389.89	655.06	455.17	421.08		418.30	473.29	462.67	396.62
9/23/06 22:45	24.82	328.92	277.70	389.89	655.06	455.17	421.08		418.30	473.30	462.67	396.62
9/23/06 23:00	24.82	328.92	277.70	389.89	655.06	455.17	421.09		418.30	473.30	462.67	396.62
9/23/06 23:15	24.81	328.93	277.70	389.89	655.06	455.17	421.09		418.31	473.30	462.68	396.62
9/23/06 23:30	24.81	328.93	277.70	389.89	655.06	455.17	421.10		418.32	473.31	462.68	396.62
9/23/06 23:45	24.81	328.93	277.71	389.89	655.06	455.18	421.10		418.31	473.31	462.69	396.62
9/24/06 0:00	24.81	328.93	277.70	389.89	655.06	455.18	421.11		418.32	473.31	462.68	396.62
9/24/06 0:15	24.81	328.93	277.70	389.89	655.06	455.18	421.11		418.31	473.31	462.69	396.62
9/24/06 0:30	24.81	328.93	277.70	389.89	655.06	455.18	421.10		418.31	473.31	462.69	396.63
9/24/06 0:45	24.81	328.94	277.70	389.89	655.06	455.18	421.11		418.31	473.31	462.69	396.62
9/24/06 1:00	24.81	328.94	277.70	389.89	655.06	455.18	421.11		418.32	473.32	462.69	396.62
9/24/06 1:15	24.81	328.94	277.71	389.89	655.06	455.18	421.11		418.32	473.31	462.69	396.62
9/24/06 1:30	24.81	328.93	277.70	389.89	655.06	455.18	421.11		418.32	473.31	462.69	396.63
9/24/06 1:45	24.81	328.93	277.71	389.89	655.06	455.18	421.10		418.31	473.31	462.69	396.62
9/24/06 2:00	24.82	328.93	277.70	389.87	655.06	455.18	421.10		418.32	473.31	462.69	396.62
9/24/06 2:15	24.82	328.92	277.71	389.89	655.06	455.18	421.10		418.33	473.31	462.69	396.62
9/24/06 2:30	24.82	328.93	277.70	389.89	655.06	455.18	421.10		418.33	473.31	462.69	396.62
9/24/06 2:45	24.82	328.93	277.70	389.87	655.06	455.18	421.10		418.34	473.31	462.68	396.62
9/24/06 3:00	24.82	328.92	277.70	389.87	655.06	455.18	421.10		418.35	473.31	462.68	396.62
9/24/06 3:15	24.81	328.92	277.70	389.86	655.06	455.18	421.10		418.34	473.31	462.68	396.61
9/24/06 3:30	24.82	328.92	277.69	389.86	655.06	455.18	421.10		418.36	473.31	462.68	396.61
9/24/06 3:45	24.81	328.92	277.69	389.86	655.06	455.18	421.11		418.37	473.30	462.68	396.60
9/24/06 4:00	24.82	328.92	277.69	389.86	655.06	455.17	421.11		418.37	473.30	462.68	396.60
9/24/06 4:15	24.81	328.92	277.69	389.84	655.06	455.17	421.10		418.37	473.30	462.67	396.59
9/24/06 4:30	24.81	328.91	277.68	389.84	655.06	455.17	421.10		418.38	473.30	462.67	396.59
9/24/06 4:45	24.82	328.91	277.67	389.84	655.06	455.16	421.10		418.67	473.29	462.67	396.59
9/24/06 5:00	24.81	328.91	277.67	389.82	655.06	455.16	421.09		418.70	473.29	462.66	396.58
9/24/06 5:15	24.81	328.90	277.67	389.82	655.06	455.16	421.09		418.71	473.28	462.65	396.57
9/24/06 5:30	24.81	328.90	277.67	389.82	655.06	455.16	421.08		418.72	473.28	462.65	396.57
9/24/06 5:45	24.82	328.89	277.67	389.82	655.06	455.15	421.08		418.73	473.28	462.65	396.57
9/24/06 6:00	24.82	328.89	277.66	389.81	655.06	455.15	421.08		418.74	473.28	462.65	396.57
9/24/06 6:15	24.81	328.88	277.66	389.82	655.06	455.15	421.07		418.82	473.28	462.65	396.57
9/24/06 6:30	24.81	328.88	277.66	389.82	655.06	455.15	421.07		418.85	473.27	462.65	396.56
9/24/06 6:45	24.81	328.88	277.66	389.81	655.06	455.15	421.07		418.87	473.27	462.65	396.56
9/24/06 7:00	24.82	328.88	277.65	389.81	655.06	455.14	421.07		419.01	473.27	462.65	396.55
9/24/06 7:15	24.82	328.88	277.65	389.81	655.06	455.14	421.06		419.01	473.26	462.65	396.55
9/24/06 7:30	24.82	328.87	277.65	389.79	655.06	455.14	421.06		419.01	473.26	462.65	396.55
9/24/06 7:45	24.82	328.87	277.65	389.79	655.06	455.14	421.07		419.01	473.26	462.65	396.55
9/24/06 8:00	24.82	328.87	277.66	389.79	655.06	455.14	421.08		419.01	473.26	462.65	396.54
9/24/06 8:15	24.82	328.87	277.66	389.79	655.06	455.15	421.09		419.01	473.25	462.65	396.55
9/24/06 8:30	24.82	328.88	277.66	389.79	655.06	455.15	421.10		419.01	473.25	462.65	396.54
9/24/06 8:45	24.82	328.88	277.66	389.79	655.06	455.15	421.11		419.02	473.25	462.66	396.53
9/24/06 9:00	24.82	328.88	277.66	389.79	655.06	455.15	421.12		419.02	473.25	462.66	396.54
9/24/06 9:15	24.82	328.88	277.66	389.79	655.06	455.15	421.13		419.02	473.25	462.66	396.54
9/24/06 9:30	24.82	328.89	277.67	389.79	655.06	455.16	421.13		419.02	473.25	462.67	396.54
9/24/06 9:45	24.82	328.89	277.67	389.79	655.06	455.16	421.14		419.03	473.25	462.67	396.54
9/24/06 10:00	24.82	328.90	277.67	389.79	655.06	455.16	421.14		419.03	473.25	462.67	396.54
9/24/06 10:15	24.81	328.90	277.67	389.79	655.06	455.16	421.14		419.03	473.25	462.67	396.54
9/24/06 10:30	24.81	328.90	277.67	389.79	655.06	455.16	421.14		419.03	473.25	462.67	396.54
9/24/06 10:45	24.81	328.90	277.67	389.79	655.06	455.16	421.13		419.04	473.26	462.67	396.55
9/24/06 11:00	24.81	328.90	277.67	389.79	655.06	455.17	421.13		419.04	473.26	462.67	396.55
9/24/06 11:15	24.81	328.91	277.67	389.77	655.06	455.17	421.14		419.04	473.26	462.68	396.55
9/24/06 11:30	24.81	328.92	277.68	389.79	655.06	455.17	421.14		419.04	473.26	462.69	396.55
9/24/06 11:45	24.80	328.93	277.68	389.79	655.06	455.18	421.14		419.04	473.27	462.68	396.55
9/24/06 12:00	24.79	328.93	277.66	389.79	655.06	455.18	421.15		419.05	473.27	462.69	396.55
9/24/06 12:15	24.79	328.93	277.67	389.77	655.06	455.17	421.14		419.03	473.27	462.69	396.54
9/24/06 12:30	24.79	328.93	277.67	389.77	655.06	455.18	421.15		419.04	473.28	462.69	396.55
9/24/06 12:45	24.78	328.93	277.68	389.77	655.06	455.18	421.15		419.04	473.28	462.68	396.54
9/24/06 13:00	24.78	328.93	277.67	389.77	655.06	455.17	421.14		419.03	473.28	462.68	396.54
9/24/06 13:15	24.78	328.94	277.68	389.77	655.06	455.19	421.14		419.04	473.29	462.68	396.54
9/24/06 13:30	24.77	328.94	277.68	389.77	655.06	455.16	421.13		419.06	473.29	462.68	396.53
9/24/06 13:45	24.77	328.94	277.66	389.76	655.06	455.16	421.12		419.05	473.29	462.67	396.53
9/24/06 14:00	24.76	328.96	277.67	389.76	655.06	455.18	421.14		419.05	473.29	462.68	396.53
9/24/06 14:15	24.76	328.95	277.65	389.76	655.06	455.17	421.10		419.05	473.30	462.68	396.52

Power Resources, Inc.
Regional Southwest Area Aquifer Tests
Appendix D-1 - 15-minute Depth to Water Data (All Monitoring Wells)

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
9/24/06 14:30	24.75	328.96	277.67	389.76	655.06	455.18	421.13		419.04	473.30	462.67	396.52
9/24/06 14:45	24.75	328.96	277.66	389.76	655.06	455.17	421.14		419.03	473.30	462.67	396.52
9/24/06 15:00	24.75	328.96	277.66	389.74	655.06	455.16	421.14		419.03	473.30	462.67	396.52
9/24/06 15:15	24.75	328.95	277.66	389.74	655.06	455.17	421.12		419.05	473.30	462.67	396.52
9/24/06 15:30	24.75	328.94	277.65	389.74	655.06	455.15	421.09		419.04	473.30	462.67	396.51
9/24/06 15:45	24.75	328.95	277.65	389.73	655.06	455.15	421.10		419.04	473.30	462.67	396.52
9/24/06 16:00	24.75	328.95	277.65	389.73	655.06	455.16	421.11		419.04	473.30	462.67	396.51
9/24/06 16:15	24.75	328.95	277.65	389.74	655.06	455.16	421.11		419.03	473.30	462.66	396.51
9/24/06 16:30	24.75	328.94	277.65	389.73	655.06	455.16	421.11		419.04	473.30	462.66	396.50
9/24/06 16:45	24.75	328.94	277.64	389.73	655.06	455.15	421.10		419.04	473.29	462.67	396.50
9/24/06 17:00	24.75	328.94	277.64	389.73	655.06	455.15	421.09		419.04	473.29	462.66	396.50
9/24/06 17:15	24.75	328.93	277.64	389.71	655.06	455.15	421.08		419.03	473.29	462.66	396.50
9/24/06 17:30	24.75	328.93	277.64	389.71	655.06	455.15	421.07		419.03	473.29	462.66	396.48
9/24/06 17:45	24.76	328.92	277.64	389.71	655.06	455.15	421.07		419.03	473.28	462.65	396.48
9/24/06 18:00	24.76	328.92	277.63	389.71	655.06	455.15	421.06		419.03	473.28	462.65	396.48
9/24/06 18:15	24.76	328.92	277.63	389.71	655.06	455.14	421.06		419.03	473.28	462.65	396.48
9/24/06 18:30	24.77	328.90	277.63	389.71	655.06	455.14	421.06		419.03	473.28	462.65	396.48
9/24/06 18:45	24.77	328.90	277.63	389.69	655.06	455.14	421.06		419.03	473.28	462.65	396.48
9/24/06 19:00	24.78	328.89	277.63	389.69	655.06	455.14	421.06		419.03	473.27	462.65	396.48
9/24/06 19:15	24.78	328.88	277.63	389.69	655.06	455.14	421.06		419.03	473.27	462.65	396.48
9/24/06 19:30	24.79	328.87	277.63	389.69	655.06	455.14	421.06		419.03	473.27	462.65	396.48
9/24/06 19:45	24.79	328.87	277.63	389.69	655.06	455.15	421.06		419.03	473.27	462.65	396.48
9/24/06 20:00	24.80	328.87	277.63	389.71	655.06	455.15	421.07		419.03	473.27	462.65	396.48
9/24/06 20:15	24.80	328.86	277.64	389.71	655.06	455.15	421.06		419.03	473.27	462.66	396.48
9/24/06 20:30	24.81	328.86	277.64	389.71	655.06	455.15	421.06		419.03	473.26	462.66	396.48
9/24/06 20:45	24.81	328.86	277.64	389.69	655.06	455.16	421.07		419.04	473.26	462.67	396.48
9/24/06 21:00	24.82	328.86	277.64	389.71	655.06	455.16	421.07		419.04	473.26	462.67	396.48
9/24/06 21:15	24.82	328.86	277.64	389.69	655.06	455.16	421.07		419.04	473.27	462.67	396.48
9/24/06 21:30	24.82	328.86	277.65	389.69	655.06	455.16	421.08		419.04	473.27	462.67	396.48
9/24/06 21:45	24.82	328.86	277.65	389.69	655.06	455.17	421.08		419.05	473.27	462.67	396.48
9/24/06 22:00	24.82	328.86	277.65	389.71	655.06	455.17	421.09		419.05	473.37	462.67	396.48
9/24/06 22:15	24.82	328.86	277.65	389.71	655.06	455.17	421.09		419.05	473.38	462.68	396.48
9/24/06 22:30	24.83	328.86	277.65	389.71	655.06	455.18	421.09		419.06	473.38	462.68	396.49
9/24/06 22:45	24.83	328.86	277.66	389.71	655.06	455.18	421.09		419.06	473.38	462.68	396.49
9/24/06 23:00	24.83	328.86	277.66	389.71	655.06	455.18	421.09		419.06	473.38	462.68	396.49
9/24/06 23:15	24.83	328.86	277.66	389.71	655.06	455.19	421.09		419.07	473.39	462.68	396.49
9/24/06 23:30	24.83	328.86	277.67	389.71	655.06	455.19	421.09		419.07	473.39	462.69	396.50
9/24/06 23:45	24.83	328.86	277.67	389.71	655.06	455.19	421.10		419.07	473.39	462.69	396.50
9/25/06 0:00	24.83	328.86	277.67	389.71	655.06	455.20	421.10		419.07	473.39	462.70	396.50
9/25/06 0:15	24.83	328.86	277.67	389.73	655.06	455.20	421.10		419.08	473.40	462.70	396.50
9/25/06 0:30	24.84	328.86	277.67	389.71	655.06	455.20	421.10		419.08	473.40	462.70	396.50
9/25/06 0:45	24.84	328.86	277.68	389.71	655.06	455.20	421.10		419.08	473.40	462.71	396.49
9/25/06 1:00	24.84	328.86	277.68	389.71	655.06	455.20	421.10		419.08	473.40	462.70	396.50
9/25/06 1:15	24.84	328.86	277.67	389.71	655.06	455.20	421.11		419.08	473.40	462.70	396.50
9/25/06 1:30	24.83	328.87	277.68	389.71	655.06	455.20	421.11		419.08	473.41	462.70	396.50
9/25/06 1:45	24.84	328.86	277.67	389.71	655.06	455.20	421.11		419.08	473.40	462.70	396.50
9/25/06 2:00	24.83	328.86	277.68	389.71	655.06	455.21	421.11		419.08	473.41	462.70	396.49
9/25/06 2:15	24.84	328.86	277.68	389.71	655.06	455.21	421.11		419.08	473.40	462.70	396.50
9/25/06 2:30	24.84	328.86	277.68	389.69	655.06	455.20	421.11		419.08	473.40	462.70	396.49
9/25/06 2:45	24.84	328.86	277.67	389.69	655.06	455.21	421.10		419.08	473.40	462.70	396.49
9/25/06 3:00	24.83	328.87	277.67	389.69	655.06	455.20	421.10		419.08	473.41	462.70	396.49
9/25/06 3:15	24.83	328.86	277.67	389.69	655.06	455.20	421.10		419.08	473.40	462.70	396.48
9/25/06 3:30	24.83	328.86	277.67	389.69	655.06	455.20	421.10		419.08	473.40	462.70	396.48
9/25/06 3:45	24.83	328.86	277.66	389.69	655.06	455.20	421.09		419.08	473.40	462.70	396.48
9/25/06 4:00	24.84	328.86	277.66	389.68	655.06	455.20	421.10		419.07	473.40	462.70	396.48
9/25/06 4:15	24.83	328.86	277.66	389.68	655.06	455.19	421.10		419.07	473.40	462.69	396.48
9/25/06 4:30	24.83	328.85	277.65	389.68	655.06	455.19	421.09		419.07	473.39	462.69	396.48
9/25/06 4:45	24.83	328.84	277.65	389.68	655.06	455.19	421.09		419.07	473.39	462.69	396.47
9/25/06 5:00	24.84	328.84	277.65	389.66	655.06	455.19	421.08		419.07	473.39	462.69	396.47
9/25/06 5:15	24.84	328.83	277.65	389.66	655.06	455.19	421.09		419.06	473.38	462.69	396.46
9/25/06 5:30	24.84	328.83	277.65	389.66	655.06	455.19	421.10		419.06	473.38	462.68	396.46
9/25/06 5:45	24.84	328.83	277.65	389.66	655.06	455.18	421.09		419.06	473.37	462.69	396.45
9/25/06 6:00	24.85	328.82	277.65	389.66	655.06	455.18	421.09		419.06	473.37	462.68	396.46
9/25/06 6:15	24.85	328.82	277.64	389.66	655.06	455.18	421.09		419.06	473.36	462.68	396.45
9/25/06 6:30	24.85	328.81	277.64	389.66	655.06	455.18	421.09		419.06	473.36	462.68	396.45
9/25/06 6:45	24.85	328.81	277.64	389.64	655.06	455.18	421.09		419.06	473.38	462.68	396.45
9/25/06 7:00	24.85	328.81	277.64	389.64	655.06	455.18	421.09		419.06	473.38	462.68	396.44
9/25/06 7:15	24.85	328.81	277.63	389.64	655.06	455.18	421.09		419.05	473.38	462.68	396.44
9/25/06 7:30	24.86	328.81	277.64	389.63	655.06	455.18	421.09		419.05	473.38	462.68	396.44
9/25/06 7:45	24.85	328.81	277.63	389.64	655.06	455.17	421.09		419.05	473.37	462.68	396.43
9/25/06 8:00	24.85	328.80	277.63	389.63	655.06	455.17	421.10		419.06	473.37	462.68	396.43
9/25/06 8:15	24.85	328.80	277.63	389.63	655.06	455.18	421.10		419.05	473.37	462.68	396.43
9/25/06 8:30	24.86	328.81	277.63	389.63	655.06	455.18	421.10		419.05	473.37	462.68	396.43
9/25/06 8:45	24.86	328.81	277.63	389.63	655.06	455.17	421.11		419.05	473.37	462.68	396.43
9/25/06 9:00	24.86	328.80	277.63	389.63	655.06	455.18	421.11		419.06	473.37	462.69	396.43
9/25/06 9:15	24.86	328.81	277.63	389.63	655.06	455.18	421.12		419.06	473.37	462.68	396.42
9/25/06 9:30	24.85	328.81	277.63	389.63	655.06	455.18	421.12		419.06	473.37	462.69	396.43
9/25/06 9:45	24.85	328.81	277.63	389.63	655.06	455.18	421.13		419.06	473.37	462.68	396.43
9/25/06 10:00	24.85	328.82	277.64	389.63	655.06	455.18	421.13		419.06	473.37	462.69	396.43
9/25/06 10:15	24.85	328.82	277.63	389.63	655.06	455.18	421.14		419.06	473.37	462.69	396.43
9/25/06 10:30	24.85	328.82	277.64	389.63	655.06	455.18	421.15		419.06	473.37	462.70	396.43
9/25/06 10:45	24.84	328.83	277.63	389.61	655.06	455.18	421.15		419.06	473.37	462.69	396.43
9/25/06 11:00	24.84	328.84	277.63	389.61	655.06	455.19	421.15		419.07	473.38	462.70	396.43
9/25/06 11:15	24.83	328.84	277.64	389.61	655.06	455.18	421.15		419.07	473.38	462.69	396.43
9/25/06 11:30	24.82	328.85	277.64	389.59	655.06	455.19	421.15		419.06	473.38	462.70	396.43
9/25/06 11:45	24.82	328.85	277.64	389.59	655.06	455.19	421.15		419.06	473.39	462.70	396.43
9/25/06 12:00	24.81	328.86	277.64	389.59	655.06	455.19	421.16		419.06	473.39	462.70	396.43
9/25/06 12:15	24.81	328.87	277.64	389.59	655.06	455.18	421.16		419.07	473.40	462.70	396.41
9/25/06 12:30	24.80	328.87	277.63	389.59	655.06	455.19	421.16		419.07	473.40	462.70	396.42
9/25/06 12:45	24.80	328.88	277.64	389.59	655.06	455.19	421.16		419.06	473.40	462.70	396.43
9/25/06 13:00	24.79	328.88	277.64	389.59	655.06	455.19	421.15		419.06	473.40	462.70	396.41
9/25/06 13:15	24.78	328.88	277.65	389.58	655.06	455.19	421.15		419.06	473.41	462.70	396.42
9/25/06 13:30	24.78	328.89	277.63	389.58	655.06	455.19	421.15		419.05	473.41	462.69	396.41
9/25/06 13:45	24.76	328.89	277.64	389.58	655.06	455.19	421.15		419.06	473.42	462.69	396.41
9/25/06 14:00	24.76	328.90	277.63	389.56	655.06	455.18	421.14		419.06	473.42	462.69	396.41
9/25/06 14:15	24.75	328.90	277.63	389.56	655.06	455.18	421.15		419.06	473.42	462.68	396.40
9/25/06 14:30	24.75	328.90	277.62	389.56	655.06	455.18	421.15		419.06	473.42	462.68	396.39
9/25/06 14:45	24.74	328.90	277.63	389.56	655.06	455.17	421.14		419.05	473.43	462.68	396.40
9/25/06 15:00	24.74	328.90	277.62	389.56	655.06	455.18	421.14		419.05	473.43	462.67	396.39
9/25/06 15:15	24.74	328.90	277.62	389.54	655.06	455.17	421.13		419.05	473.43	462.67	396.38

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
9/25/06 15:30	24.73	328.90	277.61	389.54	655.06	455.17	421.14		419.05	473.43	462.67	396.38
9/25/06 15:45	24.73	328.90	277.61	389.54	655.06	455.17	421.13		419.05	473.43	462.67	396.38
9/25/06 16:00	24.74	328.90	277.61	389.54	655.06	455.17	421.13		419.04	473.43	462.67	396.38
9/25/06 16:15	24.73	328.90	277.60	389.53	655.06	455.16	421.13		419.04	473.43	462.67	396.38
9/25/06 16:30	24.74	328.89	277.60	389.53	655.06	455.16	421.12		419.04	473.43	462.67	396.38
9/25/06 16:45	24.74	328.89	277.60	389.53	655.06	455.16	421.12		419.04	473.43	462.67	396.37
9/25/06 17:00	24.73	328.89	277.60	389.53	655.06	455.16	421.11		419.03	473.43	462.66	396.37
9/25/06 17:15	24.74	328.88	277.60	389.53	655.06	455.15	421.10		419.04	473.43	462.66	396.36
9/25/06 17:30	24.73	328.89	277.59	389.53	655.06	455.15	421.10		419.03	473.43	462.65	396.36
9/25/06 17:45	24.73	328.88	277.59	389.51	655.06	455.15	421.09		419.03	473.43	462.65	396.36
9/25/06 18:00	24.73	328.88	277.59	389.51	655.06	455.15	421.08		419.03	473.43	462.65	396.35
9/25/06 18:15	24.73	328.88	277.58	389.51	655.06	455.14	421.07		419.02	473.43	462.65	396.34
9/25/06 18:30	24.74	328.87	277.58	389.49	655.06	455.14	421.06		419.02	473.43	462.64	396.34
9/25/06 18:45	24.73	328.86	277.57	389.49	655.06	455.14	421.05		419.02	473.43	462.65	396.34
9/25/06 19:00	24.73	328.86	277.57	389.51	655.06	455.13	421.05		419.02	473.43	462.64	396.34
9/25/06 19:15	24.74	328.85	277.57	389.68	655.06	455.13	421.05		419.02	473.43	462.64	396.33
9/25/06 19:30	24.74	328.85	277.57	389.69	655.06	455.13	421.04		419.02	473.43	462.63	396.33
9/25/06 19:45	24.74	328.85	277.57	389.84	655.06	455.13	421.05		419.01	473.43	462.64	396.33
9/25/06 20:00	24.74	328.85	277.57	389.79	619.28	455.13	421.05		419.01	473.43	462.64	396.33
9/25/06 20:15	24.75	328.85	277.57	389.74	619.28	455.14	421.06		419.02	473.43	462.64	396.33
9/25/06 20:30	24.75	328.84	277.57	389.71	619.28	455.14	421.06		419.02	473.43	462.64	396.33
9/25/06 20:45	24.75	328.84	277.57	389.69	619.28	455.14	421.05		419.02	473.43	462.64	396.33
9/25/06 21:00	24.75	328.84	277.57	389.69	619.28	455.14	421.06		419.02	473.44	462.64	396.33
9/25/06 21:15	24.76	328.84	277.57	389.68	619.28	455.14	421.06		419.02	473.44	462.65	396.33
9/25/06 21:30	24.75	328.84	277.57	389.68	619.28	455.14	421.06		419.02	473.44	462.65	396.33
9/25/06 21:45	24.75	328.85	277.57	389.59	619.29	455.14	421.06		419.02	473.44	462.65	396.32
9/25/06 22:00	24.75	328.84	277.57	389.51	619.29	455.14	421.07		419.02	473.45	462.65	396.33
9/25/06 22:15	24.75	328.85	277.59	389.53	619.29	455.14	421.08		419.03	473.45	462.65	396.33
9/25/06 22:30	24.75	328.85	277.57	389.53	619.29	455.15	421.07		419.03	473.46	462.65	396.33
9/25/06 22:45	24.75	328.86	277.57	389.46	619.29	455.15	421.09		419.03	473.46	462.65	396.33
9/25/06 23:00	24.74	328.86	277.58	389.41	619.29	455.15	421.09		419.03	473.46	462.65	396.33
9/25/06 23:15	24.74	328.86	277.58	389.48	619.29	455.15	421.09		419.03	473.47	462.66	396.33
9/25/06 23:30	24.74	328.87	277.58	389.46	619.29	455.15	421.09		419.03	473.47	462.66	396.33
9/25/06 23:45	24.74	328.87	277.58	389.46	619.30	455.15	421.10		419.03	473.47	462.65	396.33
9/26/06 0:00	24.74	328.88	277.58	389.46	619.30	455.15	421.10		419.04	473.48	462.66	396.33
9/26/06 0:15	24.73	328.88	277.58	389.46	619.30	455.15	421.10		419.04	473.48	462.66	396.33
9/26/06 0:30	24.73	328.88	277.58	389.43	619.30	455.16	421.11		419.04	473.49	462.66	396.33
9/26/06 0:45	24.73	328.88	277.58	389.44	619.30	455.16	421.11		419.04	473.49	462.66	396.33
9/26/06 1:00	24.73	328.88	277.58	389.46	619.30	455.16	421.11		419.04	473.49	462.66	396.33
9/26/06 1:15	24.73	328.88	277.58	389.46	619.30	455.16	421.11		419.05	473.49	462.67	396.33
9/26/06 1:30	24.73	328.89	277.59	389.48	619.30	455.16	421.11		419.04	473.49	462.67	396.33
9/26/06 1:45	24.73	328.89	277.58	389.46	619.30	455.16	421.12		419.04	473.49	462.67	396.32
9/26/06 2:00	24.72	328.89	277.58	389.48	619.30	455.16	421.12		419.04	473.50	462.67	396.33
9/26/06 2:15	24.72	328.89	277.58	389.46	619.31	455.16	421.12		419.05	473.50	462.67	396.32
9/26/06 2:30	24.72	328.89	277.58	389.46	619.30	455.16	421.12		419.05	473.50	462.67	396.32
9/26/06 2:45	24.72	328.89	277.58	389.44	619.31	455.16	421.12		419.05	473.50	462.67	396.32
9/26/06 3:00	24.72	328.89	277.58	389.41	619.30	455.16	421.12		419.04	473.50	462.67	396.33
9/26/06 3:15	24.72	328.89	277.58	389.43	619.30	455.16	421.12		419.05	473.50	462.66	396.32
9/26/06 3:30	24.72	328.89	277.57	389.41	619.30	455.16	421.12		419.04	473.50	462.66	396.31
9/26/06 3:45	24.72	328.88	277.57	389.43	619.30	455.15	421.12		419.04	473.50	462.66	396.31
9/26/06 4:00	24.72	328.88	277.57	389.43	619.30	455.15	421.12		419.04	473.50	462.66	396.31
9/26/06 4:15	24.71	328.88	277.57	389.43	655.06	455.15	421.12		419.04	473.50	462.65	396.30
9/26/06 4:30	24.72	328.88	277.57	389.39	655.06	455.15	421.12		419.03	473.49	462.66	396.29
9/26/06 4:45	24.72	328.88	277.56	389.38	655.06	455.15	421.12		419.03	473.49	462.65	396.30
9/26/06 5:00	24.72	328.87	277.56	389.36	655.06	455.14	421.12		419.03	473.49	462.65	396.29
9/26/06 5:15	24.72	328.87	277.56	389.35	655.06	455.14	421.11		419.03	473.49	462.65	396.29
9/26/06 5:30	24.72	328.87	277.56	389.36	655.06	455.14	421.11		419.03	473.48	462.65	396.29
9/26/06 5:45	24.72	328.86	277.55	389.36	655.06	455.14	421.10		419.03	473.48	462.65	396.28
9/26/06 6:00	24.72	328.86	277.55	389.35	655.06	455.13	421.10		419.02	473.48	462.65	396.28
9/26/06 6:15	24.72	328.86	277.55	389.33	655.06	455.13	421.09		419.02	473.48	462.65	396.28
9/26/06 6:30	24.72	328.86	277.55	389.33	655.06	455.13	421.09		419.02	473.48	462.64	396.28
9/26/06 6:45	24.72	328.86	277.55	389.31	655.06	455.13	421.09		419.02	473.47	462.64	396.27
9/26/06 7:00	24.72	328.85	277.54	389.31	655.06	455.13	421.09		419.02	473.47	462.63	396.28
9/26/06 7:15	24.72	328.84	277.54	389.31	655.06	455.13	421.08		419.01	473.47	462.63	396.27
9/26/06 7:30	24.72	328.84	277.54	389.31	655.06	455.13	421.08		419.01	473.46	462.63	396.27
9/26/06 7:45	24.72	328.84	277.54	389.30	655.06	455.12	421.10		419.01	473.46	462.63	396.27
9/26/06 8:00	24.72	328.84	277.53	389.28	655.06	455.13	421.10		419.01	473.46	462.62	396.25
9/26/06 8:15	24.72	328.85	277.53	389.26	655.06	455.13	421.10		419.01	473.45	462.63	396.26
9/26/06 8:30	24.71	328.85	277.54	389.28	655.06	455.12	421.09		419.01	473.46	462.63	396.26
9/26/06 8:45	24.71	328.85	277.53	389.31	619.27	455.12	421.09		419.01	473.45	462.63	396.25
9/26/06 9:00	24.71	328.86	277.53	389.33	619.27	455.12	421.10		418.99	473.45	462.63	396.25
9/26/06 9:15	24.70	328.86	277.53	389.36	619.27	455.12	421.10		419.01	473.45	462.63	396.25
9/26/06 9:30	24.70	328.86	277.53	389.30	619.27	455.12	421.10		419.01	473.46	462.64	396.24
9/26/06 9:45	24.70	328.87	277.53	389.30	619.27	455.12	421.11		419.01	473.45	462.63	396.24
9/26/06 10:00	24.70	328.87	277.53	389.31	619.26	455.12	421.10		419.02	473.45	462.64	396.24
9/26/06 10:15	24.69	328.87	277.53	389.33	619.26	455.12	421.10		419.02	473.45	462.63	396.24
9/26/06 10:30	24.69	328.87	277.53	389.33	619.26	455.12	421.10		419.02	473.45	462.63	396.24
9/26/06 10:45	24.68	328.88	277.53	389.33	619.27	455.12	421.10		419.02	473.45	462.63	396.24
9/26/06 11:00	24.68	328.88	277.53	389.36	619.27	455.12	421.10		419.02	473.45	462.64	396.24
9/26/06 11:15	24.68	328.88	277.53	389.39	619.27	455.12	421.11		419.02	473.46	462.63	396.24
9/26/06 11:30	24.67	328.89	277.53	389.39	619.27	455.12	421.11		419.02	473.46	462.64	396.24
9/26/06 11:45	24.67	328.89	277.52	389.39	619.27	455.12	421.10		419.01	473.47	462.64	396.24
9/26/06 12:00	24.67	328.89	277.53	389.38	619.27	455.13	421.11		419.02	473.47	462.64	396.24
9/26/06 12:15	24.67	328.89	277.53	389.38	619.27	455.13	421.11		419.01	473.47	462.64	396.24
9/26/06 12:30	24.66	328.90	277.52	389.36	619.27	455.13	421.11		419.02	473.47	462.64	396.23
9/26/06 12:45	24.65	328.91	277.53	389.38	619.27	455.13	421.12		419.02	473.48	462.64	396.23
9/26/06 13:00	24.65	328.91	277.52	389.36	619.27	455.12	421.09		419.01	473.48	462.63	396.23
9/26/06 13:15	24.64	328.92	277.53	389.36	619.27	455.13	421.11		419.01	473.48	462.63	396.23
9/26/06 13:30	24.63	328.93	277.53	389.36	619.27	455.13	421.12		419.02	473.48	462.64	396.23
9/26/06 13:45	24.63	328.92	277.53	389.35	619.27	455.12	421.12		419.01	473.49	462.62	396.23
9/26/06 14:00	24.62	328.93	277.52	389.35	619.27	455.12	421.12		419.01	473.49	462.62	396.23
9/26/06 14:15	24.62	328.92	277.52	389.35	619.27	455.12	421.10		419.01	473.49	462.63	396.22
9/26/06 14:30	24.62	328.92	277.51	389.33	619.27	455.12	421.11		419.01	473.50	462.62	396.22
9/26/06 14:45	24.62	328.93	277.52	389.33	619.28	455.13	421.10		419.00	473.50	462.62	396.23
9/26/06 15:00	24.63	328.91	277.51	389.33	619.27	455.12	421.07		419.00	473.49	462.62	396.23
9/26/06 15:15	24.64	328.90	277.51	389.33	619.27	455.12	421.07		419.01	473.50	462.63	396.22
9/26/06 15:30	24.63	328.90	277.51	389.33	619.26	455.11	421.05		419.01	473.50	462.62	396.20
9/26/06 15:45	24.63	328.90	277.51	389.33	619.27	455.12	421.05		419.01	473.49	462.62	396.21
9/26/06 16:00	24.64	328.90	277.51	389.33	619.26	455.12	421.06		419.00	473.49	462.62	396.21
9/26/06 16:15	24.64	328.90	277.50	389.33	619.26	455.12	421.05		419.01	473.49	462.63	396.21

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
9/26/06 16:30	24.64	328.90	277.50	389.35	619.27	455.12	421.04		419.01	473.48	462.63	396.21
9/26/06 16:45	24.64	328.89	277.51	389.35	619.27	455.12	421.04		419.01	473.49	462.62	396.21
9/26/06 17:00	24.65	328.88	277.51	389.33	619.27	455.12	421.03		419.01	473.48	462.62	396.21
9/26/06 17:15	24.66	328.88	277.51	389.33	619.27	455.12	421.03		419.00	473.48	462.62	396.20
9/26/06 17:30	24.66	328.87	277.51	389.33	619.27	455.12	421.03		419.00	473.47	462.62	396.20
9/26/06 17:45	24.66	328.86	277.51	389.31	619.27	455.12	421.03		419.00	473.47	462.62	396.20
9/26/06 18:00	24.67	328.86	277.51	389.33	619.27	455.12	421.03		419.01	473.47	462.62	396.20
9/26/06 18:15	24.67	328.85	277.51	389.30	619.27	455.12	421.03		419.01	473.46	462.62	396.21
9/26/06 18:30	24.68	328.84	277.51	389.33	619.27	455.12	421.03		419.01	473.46	462.62	396.20
9/26/06 18:45	24.69	328.84	277.51	389.31	619.28	455.12	421.04		419.01	473.45	462.63	396.19
9/26/06 19:00	24.70	328.83	277.51	389.31	619.27	455.12	421.04		419.01	473.45	462.62	396.20
9/26/06 19:15	24.70	328.83	277.51	389.33	619.28	455.13	421.04		419.01	473.45	462.62	396.20
9/26/06 19:30	24.71	328.82	277.51	389.31	619.28	455.12	421.05		419.01	473.44	462.62	396.20
9/26/06 19:45	24.71	328.81	277.52	389.30	619.28	455.13	421.05		419.01	473.44	462.62	396.19
9/26/06 20:00	24.72	328.81	277.52	389.30	619.28	455.13	421.05		419.01	473.44	462.63	396.20
9/26/06 20:15	24.72	328.80	277.52	389.30	619.28	455.13	421.05		419.02	473.44	462.63	396.20
9/26/06 20:30	24.73	328.81	277.52	389.31	619.29	455.13	421.05		419.02	473.43	462.64	396.21
9/26/06 20:45	24.73	328.80	277.52	389.31	619.28	455.14	421.05		419.02	473.43	462.64	396.20
9/26/06 21:00	24.73	328.80	277.52	389.31	619.29	455.14	421.06		419.02	473.44	462.64	396.21
9/26/06 21:15	24.74	328.80	277.53	389.33	619.29	455.14	421.06		419.02	473.44	462.64	396.20
9/26/06 21:30	24.74	328.80	277.53	389.33	619.29	455.14	421.06		419.03	473.43	462.65	396.21
9/26/06 21:45	24.74	328.80	277.53	389.33	619.30	455.14	421.06		419.03	473.44	462.65	396.21
9/26/06 22:00	24.74	328.81	277.53	389.31	619.30	455.14	421.06		419.03	473.44	462.65	396.21
9/26/06 22:15	24.74	328.81	277.53	389.33	619.30	455.15	421.06		419.03	473.44	462.65	396.21
9/26/06 22:30	24.74	328.81	277.53	389.31	619.30	455.15	421.06		419.03	473.44	462.65	396.21
9/26/06 22:45	24.75	328.80	277.54	389.33	619.31	455.15	421.06		419.04	473.44	462.65	396.21
9/26/06 23:00	24.75	328.80	277.54	389.31	619.31	455.16	421.07		419.04	473.44	462.66	396.21
9/26/06 23:15	24.75	328.80	277.54	389.31	619.31	455.16	421.07		419.04	473.44	462.66	396.21
9/26/06 23:30	24.75	328.80	277.54	389.31	619.31	455.16	421.07		419.05	473.44	462.66	396.22
9/26/06 23:45	24.75	328.81	277.55	389.31	619.32	455.16	421.08		419.05	473.45	462.67	396.22
9/27/06 0:00	24.75	328.81	277.55	389.31	619.32	455.17	421.08		419.05	473.45	462.67	396.22
9/27/06 0:15	24.75	328.81	277.55	389.31	619.32	455.17	421.08		419.05	473.45	462.67	396.22
9/27/06 0:30	24.75	328.81	277.55	389.31	619.33	455.17	421.08		419.05	473.46	462.67	396.22
9/27/06 0:45	24.75	328.81	277.55	389.31	619.33	455.17	421.09		419.05	473.46	462.67	396.23
9/27/06 1:00	24.75	328.81	277.55	389.31	619.33	455.18	421.09		419.06	473.46	462.67	396.23
9/27/06 1:15	24.74	328.81	277.55	389.31	619.33	455.18	421.10		419.06	473.47	462.67	396.21
9/27/06 1:30	24.74	328.81	277.55	389.30	619.33	455.17	421.10		419.06	473.47	462.67	396.22
9/27/06 1:45	24.74	328.81	277.55	389.31	619.33	455.18	421.10		419.06	473.47	462.67	396.22
9/27/06 2:00	24.75	328.81	277.55	389.30	619.33	455.18	421.09		419.06	473.47	462.67	396.23
9/27/06 2:15	24.74	328.81	277.55	389.30	619.33	455.18	421.10		419.06	473.47	462.67	396.22
9/27/06 2:30	24.75	328.81	277.55	389.30	619.33	455.18	421.10		419.06	473.47	462.67	396.22
9/27/06 2:45	24.74	328.81	277.55	389.30	619.33	455.18	421.10		419.06	473.48	462.67	396.22
9/27/06 3:00	24.74	328.81	277.55	389.30	619.34	455.18	421.10		419.06	473.48	462.67	396.22
9/27/06 3:15	24.74	328.82	277.55	389.28	619.33	455.18	421.10		419.06	473.48	462.67	396.22
9/27/06 3:30	24.73	328.81	277.55	389.30	619.33	455.18	421.10		419.06	473.48	462.67	396.21
9/27/06 3:45	24.74	328.81	277.55	389.30	619.33	455.18	421.11		419.06	473.48	462.67	396.21
9/27/06 4:00	24.74	328.81	277.54	389.28	619.33	455.18	421.11		419.06	473.48	462.67	396.21
9/27/06 4:15	24.74	328.82	277.54	389.28	619.33	455.18	421.10		419.06	473.48	462.67	396.20
9/27/06 4:30	24.74	328.81	277.54	389.25	619.33	455.18	421.10		419.06	473.47	462.67	396.20
9/27/06 4:45	24.74	328.80	277.54	389.25	619.33	455.18	421.09		419.06	473.47	462.67	396.20
9/27/06 5:00	24.75	328.80	277.54	389.25	619.33	455.18	421.09		419.06	473.47	462.67	396.20
9/27/06 5:15	24.75	328.79	277.54	389.23	619.33	455.18	421.09		419.06	473.46	462.67	396.20
9/27/06 5:30	24.76	328.78	277.54	389.23	619.33	455.17	421.08		419.06	473.46	462.67	396.20
9/27/06 5:45	24.77	328.78	277.54	389.26	619.33	455.18	421.08		419.06	473.45	462.67	396.20
9/27/06 6:00	24.76	328.78	277.54	389.26	619.33	455.18	421.09		419.06	473.45	462.67	396.20
9/27/06 6:15	24.77	328.77	277.54	389.26	619.33	455.17	421.09		419.06	473.45	462.67	396.21
9/27/06 6:30	24.77	328.77	277.54	389.23	619.33	455.17	421.09		419.05	473.44	462.67	396.19
9/27/06 6:45	24.77	328.77	277.53	389.25	619.32	455.17	421.09		419.05	473.44	462.67	396.19
9/27/06 7:00	24.77	328.77	277.53	389.25	619.32	455.17	421.09		419.05	473.44	462.66	396.19
9/27/06 7:15	24.77	328.76	277.53	389.20	619.32	455.17	421.09		419.05	473.43	462.66	396.18
9/27/06 7:30	24.78	328.77	277.53	389.13	619.32	455.17	421.09		419.05	473.43	462.67	396.18
9/27/06 7:45	24.78	328.76	277.53	389.10	619.32	455.17	421.08		419.05	473.43	462.67	396.18
9/27/06 8:00	24.78	328.75	277.53	389.23	619.32	455.17	421.09		419.05	473.42	462.67	396.18
9/27/06 8:15	24.78	328.75	277.53	389.25	619.32	455.17	421.09		419.05	473.42	462.65	396.18
9/27/06 8:30	24.79	328.75	277.53	389.25	619.32	455.17	421.08		419.05	473.41	462.66	396.18
9/27/06 8:45	24.80	328.74	277.53	389.21	619.32	455.17	421.07		419.05	473.40	462.67	396.18
9/27/06 9:00	24.80	328.74	277.53	389.26	619.32	455.18	421.08		419.05	473.40	462.67	396.18
9/27/06 9:15	24.80	328.73	277.53	389.25	619.33	455.17	421.08		419.05	473.40	462.67	396.18
9/27/06 9:30	24.81	328.72	277.53	389.25	619.31	455.17	421.08		419.05	473.40	462.67	396.17
9/27/06 9:45	24.82	328.73	277.53	389.26	619.32	455.17	421.08		419.06	473.39	462.67	396.18
9/27/06 10:00	24.82	328.72	277.53	389.25	619.33	455.17	421.08		419.06	473.38	462.67	396.18
9/27/06 10:15	24.83	328.71	277.54	389.26	619.33	455.18	421.09		419.06	473.38	462.67	396.18
9/27/06 10:30	24.82	328.71	277.54	389.26	619.33	455.18	421.09		419.06	473.38	462.67	396.18
9/27/06 10:45	24.83	328.71	277.54	389.26	619.33	455.17	421.10		419.05	473.38	462.67	396.18
9/27/06 11:00	24.84	328.70	277.54	389.25	619.33	455.18	421.09		419.06	473.37	462.67	396.18
9/27/06 11:15	24.84	328.70	277.54	389.26	619.34	455.18	421.09		419.07	473.38	462.69	396.18
9/27/06 11:30	24.84	328.70	277.54	389.25	619.33	455.18	421.09		419.07	473.37	462.69	396.18
9/27/06 11:45	24.85	328.69	277.55	389.25	619.34	455.19	421.10		419.07	473.37	462.70	396.18
9/27/06 12:00	24.84	328.70	277.54	389.26	619.34	455.19	421.11		419.07	473.38	462.69	396.18
9/27/06 12:15	24.84	328.70	277.55	389.26	619.34	455.19	421.13		419.08	473.37	462.69	396.18
9/27/06 12:30	24.84	328.70	277.54	389.26	619.34	455.18	421.11		419.06	473.37	462.69	396.18
9/27/06 12:45	24.85	328.70	277.55	389.26	619.34	455.19	421.12		419.07	473.37	462.68	396.18
9/27/06 13:00	24.85	328.69	277.55	389.26	619.35	455.19	421.10		419.07	473.37	462.70	396.18
9/27/06 13:15	24.85	328.69	277.55	389.26	619.35	455.19	421.10		419.08	473.36	462.70	396.18
9/27/06 13:30	24.86	328.68	277.55	389.26	619.35	455.20	421.10		419.09	473.36	462.70	396.18
9/27/06 13:45	24.86	328.68	277.55	389.25	619.35	455.20	421.10		419.08	473.36	462.70	396.19
9/27/06 14:00	24.86	328.68	277.55	389.25	619.35	455.20	421.10		419.08	473.36	462.70	396.18
9/27/06 14:15	24.86	328.69	277.55	389.25	619.35	455.20	421.11		419.08	473.36	462.70	396.18
9/27/06 14:30	24.86	328.69	277.55	389.23	619.35	455.20	421.12		419.07	473.36	462.70	396.18
9/27/06 14:45	24.86	328.69	277.55	389.21	619.35	455.20	421.11		419.08	473.36	462.70	396.18
9/27/06 15:00	24.86	328.69	277.55	389.23	619.35	455.21	421.12		419.09	473.36	462.70	396.18
9/27/06 15:15	24.86	328.69	277.55	389.21	619.36	455.20	421.12		419.08	473.37	462.70	396.18
9/27/06 15:30	24.86	328.69	277.55	389.23	619.36	455.20	421.12		419.08	473.36	462.70	396.18
9/27/06 15:45	24.85	328.71	277.54	389.21	619.35	455.20	421.15		419.08	473.36	462.69	396.17
9/27/06 16:00	24.85	328.70	277.55	389.23	619.36	455.20	421.14		419.08	473.37	462.69	396.17
9/27/06 16:15	24.84	328.70	277.54	389.23	619.35	455.20	421.14		419.08	473.37	462.69	396.18
9/27/06 16:30	24.84	328.70	277.54	389.23	619.35	455.20	421.14		419.08	473.37	462.70	396.17
9/27/06 16:45	24.84	328.71	277.53	389.21	619.35	455.19	421.14		419.08	473.37	462.69	396.17
9/27/06 17:00	24.84	328.70	277.53	389.20	619.35	455.19	421.13		419.08	473.37	462.69	396.16
9/27/06 17:15	24.83	328.71	277.53	389.21	619.35	455.19	421.14		419.07	473.37	462.69	396.16

Power Resources, Inc.
Regional Southwest Area Aquifer Tests
Appendix D-1 - 15-minute Depth to Water Data (All Monitoring Wells)

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
9/27/06 17:30	24.83	328.70	277.53	389.20	619.35	455.19	421.12		419.07	473.37	462.69	396.16
9/27/06 17:45	24.83	328.70	277.53	389.18	619.35	455.19	421.11		419.07	473.37	462.69	396.16
9/27/06 18:00	24.83	328.70	277.53	389.18	619.35	455.19	421.11		419.07	473.37	462.68	396.15
9/27/06 18:15	24.83	328.70	277.53	389.18	619.35	455.19	421.10		419.07	473.37	462.68	396.15
9/27/06 18:30	24.83	328.68	277.52	389.18	619.35	455.19	421.09		419.07	473.37	462.68	396.14
9/27/06 18:45	24.84	328.68	277.52	389.20	619.35	455.19	421.09		419.07	473.36	462.68	396.15
9/27/06 19:00	24.84	328.67	277.52	389.20	619.35	455.19	421.08		419.07	473.36	462.67	396.15
9/27/06 19:15	24.84	328.66	277.52	389.20	619.35	455.19	421.08		419.07	473.36	462.68	396.13
9/27/06 19:30	24.85	328.66	277.52	389.20	619.35	455.18	421.08		419.07	473.36	462.68	396.15
9/27/06 19:45	24.84	328.66	277.52	389.20	619.35	455.18	421.09		419.07	473.36	462.67	396.14
9/27/06 20:00	24.85	328.66	277.52	389.20	619.35	455.18	421.08		419.07	473.36	462.67	396.14
9/27/06 20:15	24.85	328.65	277.52	389.20	619.35	455.19	421.08		419.07	473.36	462.68	396.14
9/27/06 20:30	24.85	328.65	277.52	389.18	619.35	455.19	421.08		419.07	473.36	462.67	396.14
9/27/06 20:45	24.85	328.65	277.52	389.20	619.35	455.19	421.08		419.07	473.36	462.68	396.13
9/27/06 21:00	24.86	328.65	277.52	389.18	619.35	455.19	421.08		419.07	473.36	462.68	396.15
9/27/06 21:15	24.86	328.65	277.52	389.20	619.35	455.19	421.08		419.07	473.36	462.69	396.14
9/27/06 21:30	24.85	328.65	277.52	389.20	619.35	455.19	421.09		419.07	473.36	462.69	396.15
9/27/06 21:45	24.85	328.66	277.52	389.18	619.35	455.19	421.09		419.07	473.37	462.69	396.15
9/27/06 22:00	24.85	328.66	277.53	389.16	619.35	455.19	421.10		419.07	473.37	462.69	396.14
9/27/06 22:15	24.85	328.66	277.52	389.16	619.36	455.19	421.09		419.08	473.37	462.69	396.14
9/27/06 22:30	24.86	328.66	277.52	389.16	619.36	455.20	421.10		419.08	473.37	462.69	396.14
9/27/06 22:45	24.85	328.66	277.52	389.16	619.36	455.20	421.10		419.08	473.37	462.70	396.15
9/27/06 23:00	24.85	328.66	277.52	389.16	619.36	455.20	421.10		419.08	473.37	462.70	396.14
9/27/06 23:15	24.85	328.66	277.52	389.16	619.36	455.20	421.10		419.08	473.38	462.70	396.14
9/27/06 23:30	24.84	328.66	277.53	389.18	619.36	455.20	421.10		419.08	473.38	462.70	396.14
9/27/06 23:45	24.84	328.67	277.53	389.18	619.36	455.20	421.10		419.08	473.39	462.70	396.14
9/28/06 0:00	24.84	328.67	277.52	389.18	619.36	455.20	421.10		419.08	473.39	462.70	396.14
9/28/06 0:15	24.84	328.67	277.53	389.16	619.37	455.20	421.11		419.09	473.39	462.70	396.13
9/28/06 0:30	24.83	328.67	277.52	389.16	619.37	455.20	421.11		419.09	473.40	462.70	396.14
9/28/06 0:45	24.83	328.68	277.53	389.18	619.37	455.20	421.12		419.09	473.40	462.70	396.14
9/28/06 1:00	24.83	328.69	277.52	389.15	619.37	455.20	421.13		419.09	473.41	462.70	396.13
9/28/06 1:15	24.82	328.69	277.53	389.15	619.37	455.20	421.13		419.09	473.41	462.70	396.13
9/28/06 1:30	24.83	328.69	277.53	389.15	619.37	455.20	421.14		419.09	473.41	462.70	396.13
9/28/06 1:45	24.82	328.69	277.53	389.15	619.37	455.21	421.14		419.09	473.42	462.70	396.13
9/28/06 2:00	24.82	328.70	277.53	389.16	619.37	455.21	421.15		419.09	473.42	462.70	396.13
9/28/06 2:15	24.82	328.70	277.53	389.16	619.37	455.21	421.15		419.09	473.42	462.70	396.13
9/28/06 2:30	24.82	328.70	277.53	389.16	619.37	455.21	421.16		419.09	473.43	462.70	396.13
9/28/06 2:45	24.82	328.70	277.52	389.15	619.37	455.21	421.16		419.09	473.43	462.70	396.13
9/28/06 3:00	24.81	328.71	277.52	389.15	619.37	455.21	421.16		419.09	473.43	462.70	396.13
9/28/06 3:15	24.80	328.71	277.52	389.15	619.37	455.21	421.17		419.09	473.43	462.70	396.13
9/28/06 3:30	24.80	328.72	277.52	389.13	619.37	455.20	421.17		419.09	473.44	462.70	396.13
9/28/06 3:45	24.80	328.72	277.52	389.13	619.37	455.20	421.17		419.09	473.44	462.70	396.13
9/28/06 4:00	24.79	328.72	277.51	389.13	619.37	455.20	421.16		419.08	473.44	462.69	396.12
9/28/06 4:15	24.79	328.72	277.50	389.13	619.36	455.20	421.16		419.08	473.44	462.69	396.11
9/28/06 4:30	24.79	328.73	277.50	389.13	619.36	455.20	421.16		419.08	473.45	462.69	396.11
9/28/06 4:45	24.78	328.73	277.50	389.11	619.36	455.20	421.16		419.08	473.45	462.69	396.11
9/28/06 5:00	24.78	328.73	277.50	389.11	619.36	455.19	421.15		419.08	473.45	462.69	396.11
9/28/06 5:15	24.78	328.73	277.50	389.11	619.36	455.19	421.15		419.07	473.45	462.68	396.10
9/28/06 5:30	24.78	328.73	277.49	389.11	619.36	455.19	421.15		419.07	473.45	462.68	396.10
9/28/06 5:45	24.77	328.73	277.49	389.11	619.35	455.18	421.15		419.07	473.45	462.68	396.09
9/28/06 6:00	24.77	328.73	277.49	389.11	619.35	455.18	421.15		419.07	473.46	462.67	396.09
9/28/06 6:15	24.77	328.73	277.48	389.10	619.35	455.18	421.15		419.07	473.46	462.67	396.10
9/28/06 6:30	24.76	328.73	277.48	389.11	619.35	455.18	421.14		419.07	473.46	462.67	396.09
9/28/06 6:45	24.76	328.73	277.48	389.10	619.34	455.17	421.14		419.06	473.46	462.67	396.09
9/28/06 7:00	24.75	328.73	277.48	389.13	619.33	455.17	421.14		419.06	473.46	462.67	396.09
9/28/06 7:15	24.75	328.74	277.48	389.10	619.33	455.17	421.13		419.06	473.46	462.65	396.09
9/28/06 7:30	24.75	328.74	277.47	389.11	619.33	455.16	421.13		419.05	473.46	462.65	396.07
9/28/06 7:45	24.75	328.74	277.47	389.10	619.33	455.16	421.13		419.05	473.46	462.65	396.06
9/28/06 8:00	24.74	328.75	277.46	389.10	619.33	455.16	421.13		419.05	473.46	462.65	396.07
9/28/06 8:15	24.73	328.75	277.46	389.10	619.33	455.15	421.12		419.05	473.46	462.65	396.05
9/28/06 8:30	24.72	328.75	277.46	389.08	619.32	455.15	421.12		419.05	473.46	462.64	396.05
9/28/06 8:45	24.72	328.76	277.45	389.10	619.32	455.15	421.12		419.05	473.46	462.64	396.04
9/28/06 9:00	24.72	328.76	277.45	389.08	619.32	455.15	421.11		419.04	473.45	462.65	396.04
9/28/06 9:15	24.71	328.77	277.45	389.08	619.32	455.15	421.11		419.05	473.45	462.65	396.04
9/28/06 9:30	24.70	328.77	277.44	389.10	619.32	455.14	421.10		419.04	473.46	462.63	396.04
9/28/06 9:45	24.69	328.78	277.43	389.08	619.32	455.14	421.11		419.04	473.46	462.64	396.03
9/28/06 10:00	24.69	328.77	277.43	389.08	619.32	455.14	421.11		419.03	473.46	462.63	396.03
9/28/06 10:15	24.69	328.77	277.44	389.08	619.31	455.14	421.11		419.03	473.45	462.64	396.03
9/28/06 10:30	24.68	328.78	277.44	389.08	619.31	455.13	421.11		419.03	473.46	462.64	396.03
9/28/06 10:45	24.67	328.79	277.43	389.08	619.31	455.13	421.10		419.03	473.46	462.62	396.02
9/28/06 11:00	24.66	328.79	277.43	389.06	619.30	455.13	421.10		419.02	473.47	462.63	396.02
9/28/06 11:15	24.65	328.80	277.42	389.05	619.30	455.13	421.11		419.02	473.47	462.62	396.01
9/28/06 11:30	24.64	328.81	277.42	389.05	619.29	455.13	421.10		419.02	473.48	462.62	395.99
9/28/06 11:45	24.62	328.82	277.41	389.05	619.28	455.12	421.09		419.02	473.48	462.61	395.99
9/28/06 12:00	24.62	328.81	277.40	389.02	619.28	455.11	421.09		419.02	473.48	462.62	395.99
9/28/06 12:15	24.62	328.82	277.41	389.03	619.28	455.12	421.11		419.01	473.49	462.60	395.99
9/28/06 12:30	24.61	328.83	277.40	389.02	619.27	455.11	421.10		419.01	473.49	462.60	395.99
9/28/06 12:45	24.60	328.83	277.40	389.02	619.27	455.12	421.11		419.00	473.50	462.59	395.99
9/28/06 13:00	24.60	328.84	277.39	389.02	619.28	455.11	421.08		419.02	473.49	462.60	395.99
9/28/06 13:15	24.60	328.84	277.39	389.03	619.27	455.10	421.08		418.99	473.49	462.60	395.98
9/28/06 13:30	24.58	328.84	277.40	389.02	619.27	455.11	421.09		419.00	473.50	462.59	395.98
9/28/06 13:45	24.58	328.84	277.39	389.00	619.27	455.10	421.08		419.00	473.50	462.59	395.97
9/28/06 14:00	24.57	328.85	277.39	389.00	619.27	455.10	421.10		419.00	473.51	462.59	395.96
9/28/06 14:15	24.56	328.86	277.38	389.00	619.27	455.09	421.09		418.97	473.52	462.59	395.97
9/28/06 14:30	24.55	328.87	277.38	389.00	619.26	455.08	421.08		418.98	473.52	462.58	395.96
9/28/06 14:45	24.54	328.88	277.38	389.00	619.26	455.08	421.09		418.99	473.52	462.58	395.95
9/28/06 15:00	24.54	328.87	277.36	389.00	619.25	455.08	421.09		418.99	473.53	462.57	395.94
9/28/06 15:15	24.54	328.87	277.37	388.98	619.25	455.08	421.07		418.99	473.51	462.57	395.95
9/28/06 15:30	24.53	328.88	277.37	388.98	619.26	455.08	421.06		418.98	473.52	462.57	395.95
9/28/06 15:45	24.53	328.88	277.37	388.98	619.25	455.08	421.08		418.98	473.52	462.57	395.95
9/28/06 16:00	24.53	328.87	277.36	388.97	619.26	455.08	421.08		418.97	473.51	462.57	395.94
9/28/06 16:15	24.53	328.87	277.37	388.98	619.26	455.08	421.06		418.99	473.51	462.57	395.94
9/28/06 16:30	24.53	328.87	277.36	388.98	619.26	455.08	421.05		418.98	473.51	462.57	395.94
9/28/06 16:45	24.53	328.87	277.36	388.97	619.26	455.08	421.06		418.98	473.50	462.57	395.94
9/28/06 17:00	24.53	328.86	277.36	388.98	619.26	455.08	421.03		418.99	473.50	462.57	395.94
9/28/06 17:15	24.54	328.86	277.36	389.00	619.25	455.08	421.03		418.98	473.50	462.57	395.94
9/28/06 17:30	24.54	328.85	277.36	389.00	619.25	455.08	421.01		418.98	473.50	462.57	395.94
9/28/06 17:45	24.54	328.85	277.37	388.97	619.26	455.08	421.01		418.98	473.50	462.57	395.94
9/28/06 18:00	24.56	328.82	277.36	388.97	619.27	455.08	420.98		418.99	473.49	462.58	395.94
9/28/06 18:15	24.57	328.82	277.37	388.98	619.27	455.08	420.99		418.98	473.48	462.58	395.94

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
9/28/06 18:30	24.57	328.81	277.37	388.97	619.27	455.09	420.99		418.98	473.49	462.57	395.95
9/28/06 18:45	24.57	328.81	277.36	388.97	619.27	455.08	420.99		418.98	473.49	462.57	395.94
9/28/06 19:00	24.58	328.80	277.37	388.98	619.27	455.08	421.00		418.98	473.49	462.58	395.94
9/28/06 19:15	24.59	328.79	277.36	388.97	619.27	455.08	420.99		418.98	473.49	462.57	395.94
9/28/06 19:30	24.58	328.79	277.37	388.97	619.27	455.08	420.99		418.98	473.49	462.57	395.94
9/28/06 19:45	24.59	328.79	277.36	388.97	619.27	455.08	420.99		418.98	473.49	462.57	395.94
9/28/06 20:00	24.60	328.78	277.36	388.98	619.27	455.08	420.99		418.98	473.49	462.57	395.94
9/28/06 20:15	24.60	328.78	277.36	388.97	619.27	455.08	420.99		418.98	473.49	462.57	395.94
9/28/06 20:30	24.60	328.78	277.36	388.97	619.27	455.09	421.00		418.98	473.49	462.57	395.94
9/28/06 20:45	24.60	328.78	277.37	388.97	619.27	455.08	421.00		418.98	473.49	462.57	395.93
9/28/06 21:00	24.60	328.76	277.36	388.97	619.27	455.08	421.00		418.98	473.48	462.57	395.94
9/28/06 21:15	24.61	328.76	277.37	388.97	619.27	455.09	420.99		418.98	473.48	462.57	395.94
9/28/06 21:30	24.61	328.76	277.37	388.97	619.27	455.09	420.99		418.98	473.48	462.57	395.93
9/28/06 21:45	24.61	328.76	277.37	388.97	619.27	455.09	420.99		418.99	473.49	462.57	395.94
9/28/06 22:00	24.61	328.76	277.36	388.97	619.27	455.09	420.99		418.99	473.49	462.57	395.93
9/28/06 22:15	24.61	328.76	277.36	388.98	619.28	455.09	420.99		418.99	473.49	462.58	395.93
9/28/06 22:30	24.61	328.75	277.37	388.98	619.28	455.09	420.99		418.99	473.49	462.58	395.93
9/28/06 22:45	24.61	328.76	277.37	388.97	619.28	455.09	420.99		418.99	473.49	462.58	395.93
9/28/06 23:00	24.61	328.76	277.37	388.97	619.28	455.09	421.00		418.99	473.49	462.58	395.93
9/28/06 23:15	24.62	328.75	277.37	388.97	619.28	455.09	421.01		418.99	473.49	462.58	395.94
9/28/06 23:30	24.62	328.75	277.37	388.97	619.28	455.10	421.01		418.99	473.49	462.59	395.94
9/28/06 23:45	24.62	328.75	277.38	388.97	619.29	455.10	421.00		419.00	473.49	462.59	395.94
9/29/06 0:00	24.63	328.75	277.38	388.98	619.29	455.10	421.01		419.00	473.49	462.59	395.94
9/29/06 0:15	24.63	328.75	277.38	388.98	619.29	455.11	421.01		419.00	473.49	462.59	395.94
9/29/06 0:30	24.62	328.75	277.38	388.98	619.29	455.11	421.02		419.01	473.49	462.59	395.94
9/29/06 0:45	24.62	328.76	277.38	388.98	619.29	455.11	421.03		419.01	473.50	462.59	395.94
9/29/06 1:00	24.62	328.76	277.39	388.97	619.29	455.11	421.03		419.00	473.50	462.59	395.94
9/29/06 1:15	24.62	328.76	277.38	389.00	619.29	455.11	421.02		419.01	473.50	462.59	395.94
9/29/06 1:30	24.62	328.76	277.38	389.00	619.30	455.11	421.03		419.01	473.50	462.59	395.94
9/29/06 1:45	24.62	328.76	277.38	389.00	619.30	455.11	421.02		419.01	473.51	462.60	395.94
9/29/06 2:00	24.62	328.76	277.38	389.02	619.30	455.11	421.02		419.01	473.51	462.60	395.94
9/29/06 2:15	24.62	328.76	277.38	389.00	619.30	455.12	421.02		419.02	473.51	462.61	395.94
9/29/06 2:30	24.62	328.77	277.38	388.98	619.30	455.12	421.04		419.02	473.51	462.60	395.94
9/29/06 2:45	24.62	328.77	277.38	389.00	619.31	455.12	421.05		419.02	473.51	462.60	395.94
9/29/06 3:00	24.62	328.77	277.39	389.00	619.31	455.12	421.05		419.02	473.51	462.61	395.94
9/29/06 3:15	24.62	328.77	277.40	388.98	619.31	455.12	421.05		419.02	473.51	462.61	395.94
9/29/06 3:30	24.62	328.77	277.39	389.00	619.31	455.12	421.05		419.02	473.52	462.61	395.94
9/29/06 3:45	24.62	328.77	277.38	389.00	619.31	455.12	421.05		419.02	473.52	462.61	395.94
9/29/06 4:00	24.62	328.77	277.39	388.98	619.31	455.12	421.06		419.02	473.52	462.61	395.94
9/29/06 4:15	24.62	328.77	277.39	389.00	619.31	455.13	421.06		419.02	473.52	462.61	395.94
9/29/06 4:30	24.62	368.05	277.38	389.00	619.31	455.12	421.06		419.03	473.52	462.61	395.94
9/29/06 4:45	24.63	368.05	277.38	388.98	619.31	455.13	421.04		419.02	473.52	462.61	395.94
9/29/06 5:00	24.63	368.05	277.38	388.98	619.31	455.13	421.04		419.03	473.51	462.62	395.94
9/29/06 5:15	24.63	368.05	277.39	388.98	619.31	455.13	421.04		419.03	473.51	462.61	395.94
9/29/06 5:30	24.63	368.05	277.39	388.98	619.31	455.13	421.05		419.03	473.51	462.62	395.94
9/29/06 5:45	24.63	368.05	277.39	388.98	619.31	455.13	421.04		419.03	473.51	462.62	395.94
9/29/06 6:00	24.63	368.05	277.39	388.98	619.31	455.13	421.04		419.03	473.51	462.61	395.94
9/29/06 6:15	24.63	368.05	277.38	388.98	619.31	455.13	421.04		419.03	473.51	462.61	395.94
9/29/06 6:30	24.63	368.05	277.39	388.95	619.31	455.13	421.04		419.02	473.51	462.62	395.94
9/29/06 6:45	24.63	368.05	277.39	388.95	619.31	455.13	421.04		419.03	473.51	462.61	395.94
9/29/06 7:00	24.63	368.05	277.38	388.95	619.31	455.13	421.04		419.02	473.51	462.61	395.94
9/29/06 7:15	24.63	368.05	277.39	388.95	619.31	455.13	421.03		419.02	473.51	462.61	395.93
9/29/06 7:30	24.63	368.05	277.38	388.95	619.31	455.13	421.05		419.02	473.50	462.61	395.93
9/29/06 7:45	24.64	368.05	277.39	388.95	619.31	455.13	421.05		419.03	473.50	462.61	395.93
9/29/06 8:00	24.64	368.05	277.38	388.97	619.31	455.13	421.06		419.03	473.49	462.61	395.93
9/29/06 8:15	24.64	368.05	277.38	388.97	619.31	455.13	421.05		419.03	473.49	462.62	395.93
9/29/06 8:30	24.63	368.05	277.38	388.95	619.31	455.13	421.06		419.03	473.49	462.62	395.93
9/29/06 8:45	24.63	368.05	277.38	388.95	619.31	455.13	421.05		419.04	473.49	462.61	395.93
9/29/06 9:00	24.63	368.05	277.39	388.93	619.31	455.13	421.08		419.03	473.48	462.61	395.92
9/29/06 9:15	24.63	368.05	277.37	388.93	619.31	455.13	421.08		419.03	473.48	462.61	395.93
9/29/06 9:30	24.63	368.05	277.38	388.93	619.31	455.13	421.10		419.03	473.48	462.61	395.92
9/29/06 9:45	24.63	368.04	277.38	388.93	619.31	455.13	421.10		419.03	473.48	462.62	395.92
9/29/06 10:00	24.63	368.04	277.38	388.93	619.31	455.13	421.11		419.03	473.47	462.61	395.92
9/29/06 10:15	24.63	368.04	277.39	388.93	619.31	455.14	421.11		419.03	473.47	462.62	395.92
9/29/06 10:30	24.62	368.04	277.38	388.97	619.31	455.14	421.10		419.04	473.47	462.62	395.92
9/29/06 10:45	24.62	368.04	277.38	388.92	619.31	455.13	421.10		419.04	473.47	462.62	395.91
9/29/06 11:00	24.62	368.04	277.38	388.92	619.31	455.13	421.11		419.03	473.46	462.61	395.91
9/29/06 11:15	24.62	368.04	277.38	388.92	619.31	455.13	421.10		419.03	473.46	462.62	395.91
9/29/06 11:30	24.61	368.04	277.38	388.93	619.31	455.13	421.11		419.02	473.47	462.61	395.91
9/29/06 11:45	24.61	368.04	277.38	388.92	619.31	455.13	421.10		419.03	473.46	462.60	395.91
9/29/06 12:00	24.60	368.04	277.37	388.92	619.31	455.13	421.11		419.02	473.46	462.60	395.90
9/29/06 12:15	24.60	368.04	277.37	388.90	619.31	455.12	421.10		419.01	473.46	462.60	395.90
9/29/06 12:30	24.60	368.04	277.37	388.90	619.31	455.12	421.10		419.02	473.47	462.61	395.90
9/29/06 12:45	24.59	368.04	277.36	388.90	619.30	455.12	421.09		419.01	473.47	462.60	395.89
9/29/06 13:00	24.59	368.04	277.35	388.88	619.30	455.12	421.10		419.02	473.47	462.59	395.89
9/29/06 13:15	24.58	368.04	277.36	388.88	619.30	455.11	421.09		419.01	473.47	462.59	395.89
9/29/06 13:30	24.57	368.04	277.36	388.88	619.30	455.11	421.09		419.01	473.47	462.59	395.89
9/29/06 13:45	24.57	368.04	277.35	388.88	619.30	455.11	421.08		419.01	473.47	462.59	395.89
9/29/06 14:00	24.56	368.04	277.35	388.88	619.30	455.11	421.09		419.01	473.48	462.59	395.89
9/29/06 14:15	24.56	368.04	277.34	388.87	619.29	455.11	421.08		419.01	473.48	462.59	395.88
9/29/06 14:30	24.56	368.04	277.34	388.88	619.29	455.10	421.09		419.01	473.48	462.59	395.88
9/29/06 14:45	24.56	368.04	277.34	388.87	619.28	455.11	421.09		419.00	473.48	462.59	395.88
9/29/06 15:00	24.55	368.04	277.34	388.87	619.29	455.11	421.07		419.00	473.47	462.59	395.87
9/29/06 15:15	24.56	368.04	277.33	388.87	619.29	455.10	421.05		419.01	473.48	462.59	395.87
9/29/06 15:30	24.56	368.04	277.34	388.87	619.29	455.11	421.04		419.00	473.48	462.59	395.87
9/29/06 15:45	24.56	368.04	277.34	388.88	619.29	455.10	421.03		419.00	473.47	462.59	395.86
9/29/06 16:00	24.57	368.04	277.34	388.88	619.29	455.10	421.04		419.00	473.47	462.59	395.87
9/29/06 16:15	24.56	368.04	277.33	388.88	619.29	455.10	421.03		419.00	473.48	462.58	395.86
9/29/06 16:30	24.56	368.04	277.33	388.88	619.29	455.10	421.00		419.00	473.47	462.57	395.87
9/29/06 16:45	24.57	368.04	277.34	388.87	619.29	455.10	421.01		419.00	473.47	462.58	395.86
9/29/06 17:00	24.57	368.04	277.33	388.85	619.29	455.10	421.01		419.00	473.47	462.57	395.85
9/29/06 17:15	24.58	368.04	277.33	388.87	619.29	455.10	421.00		419.00	473.47	462.58	395.85
9/29/06 17:30	24.58	368.04	277.33	388.83	619.29	455.10	421.00		419.00	473.47	462.58	395.85
9/29/06 17:45	24.59	368.04	277.34	388.83	619.29	455.10	421.00		419.00	473.47	462.58	395.86
9/29/06 18:00	24.60	368.04	277.34	388.83	619.29	455.10	421.01		419.00	473.47	462.58	395.86
9/29/06 18:15	24.60	368.04	277.33	388.83	619.29	455.10	421.00		419.00	473.47	462.58	395.86
9/29/06 18:30	24.61	368.04	277.33	388.83	619.29	455.10	421.00		419.00	473.46	462.58	395.86
9/29/06 18:45	24.61	368.04	277.33	388.83	619.30	455.10	421.01		419.01	473.46	462.58	395.86
9/29/06 19:00	24.62	368.04	277.34	388.83	619.29	455.11	421.00		419.00	473.46	462.58	395.86
9/29/06 19:15	24.63	368.05	277.33	388.83	619.30	455.11	421.00		419.01	473.46	462.59	395.86

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
9/29/06 19:30	24.64	368.05	277.34	388.83	619.30	455.11	421.00		419.01	473.45	462.59	395.86
9/29/06 19:45	24.64	368.05	277.34	388.85	619.30	455.11	421.00		419.01	473.45	462.59	395.86
9/29/06 20:00	24.64	368.05	277.34	388.85	619.30	455.11	421.00		419.01	473.45	462.58	395.86
9/29/06 20:15	24.65	368.05	277.34	388.85	619.30	455.11	421.00		419.01	473.45	462.59	395.86
9/29/06 20:30	24.65	368.05	277.34	388.85	619.31	455.11	421.01		419.01	473.45	462.59	395.86
9/29/06 20:45	24.65	368.05	277.34	388.83	619.31	455.12	421.00		419.01	473.45	462.59	395.86
9/29/06 21:00	24.66	368.05	277.34	388.85	619.31	455.11	421.00		419.01	473.45	462.59	395.86
9/29/06 21:15	24.66	368.05	277.34	388.85	619.31	455.12	421.01		419.02	473.45	462.59	395.86
9/29/06 21:30	24.66	368.05	277.34	388.85	619.31	455.12	421.01		419.02	473.45	462.59	395.86
9/29/06 21:45	24.66	368.05	277.34	388.85	619.31	455.12	421.03		419.02	473.44	462.59	395.86
9/29/06 22:00	24.67	368.05	277.34	388.85	619.31	455.12	421.03		419.02	473.44	462.59	395.86
9/29/06 22:15	24.67	368.05	277.34	388.83	619.31	455.12	421.02		419.02	473.44	462.59	395.86
9/29/06 22:30	24.67	368.05	277.34	388.87	619.31	455.12	421.03		419.02	473.45	462.59	395.86
9/29/06 22:45	24.66	368.05	277.34	388.83	619.31	455.12	421.03		419.02	473.45	462.59	395.85
9/29/06 23:00	24.67	368.05	277.34	388.83	619.31	455.12	421.03		419.02	473.45	462.59	395.86
9/29/06 23:15	24.66	368.05	277.34	388.83	619.31	455.12	421.04		419.02	473.45	462.59	395.85
9/29/06 23:30	24.66	368.05	277.34	388.83	619.31	455.12	421.03		419.02	473.46	462.59	395.85
9/29/06 23:45	24.66	368.05	277.34	388.83	619.31	455.12	421.04		419.02	473.46	462.59	395.85
9/30/06 0:00	24.66	368.05	277.34	388.83	619.31	455.12	421.04		419.02	473.46	462.59	395.84
9/30/06 0:15	24.66	368.05	277.34	388.83	619.32	455.12	421.03		419.02	473.46	462.59	395.84
9/30/06 0:30	24.66	368.05	277.34	388.83	619.32	455.12	421.04		419.02	473.46	462.59	395.84
9/30/06 0:45	24.65	368.05	277.34	388.83	619.32	455.12	421.05		419.02	473.47	462.59	395.86
9/30/06 1:00	24.66	368.05	277.34	388.83	619.31	455.12	421.05		419.02	473.47	462.59	395.85
9/30/06 1:15	24.66	368.05	277.34	388.85	619.32	455.12	421.05		419.02	473.47	462.59	395.85
9/30/06 1:30	24.65	368.05	277.34	388.83	619.32	455.12	421.06		419.03	473.47	462.59	395.84
9/30/06 1:45	24.66	368.05	277.34	388.82	619.32	455.13	421.04		419.03	473.47	462.59	395.85
9/30/06 2:00	24.65	368.05	277.34	388.83	619.32	455.13	421.04		419.03	473.47	462.59	395.84
9/30/06 2:15	24.66	368.05	277.35	388.83	619.32	455.13	421.04		419.03	473.47	462.59	395.85
9/30/06 2:30	24.66	368.05	277.35	388.83	619.33	455.13	421.04		419.03	473.47	462.59	395.85
9/30/06 2:45	24.66	368.05	277.35	388.85	619.33	455.13	421.04		419.03	473.47	462.60	395.85
9/30/06 3:00	24.66	368.05	277.35	388.88	619.33	455.14	421.04		419.04	473.47	462.60	395.85
9/30/06 3:15	24.66	368.05	277.35	388.82	619.33	455.14	421.06		419.04	473.48	462.60	395.85
9/30/06 3:30	24.66	368.05	277.35	388.85	619.33	455.14	421.08		419.03	473.48	462.60	395.86
9/30/06 3:45	24.65	368.05	277.35	388.82	619.33	455.13	421.06		419.03	473.48	462.60	395.85
9/30/06 4:00	24.65	368.05	277.35	388.82	619.33	455.14	421.09		419.03	473.49	462.60	395.86
9/30/06 4:15	24.65	368.05	277.35	388.82	619.33	455.13	421.08		419.03	473.49	462.60	395.85
9/30/06 4:30	24.65	368.05	277.35	388.82	619.33	455.14	421.06		419.04	473.49	462.61	395.86
9/30/06 4:45	24.65	368.05	277.34	388.83	619.33	455.14	421.07		419.04	473.49	462.60	395.85
9/30/06 5:00	24.65	368.05	277.35	388.82	619.33	455.14	421.08		419.03	473.49	462.60	395.85
9/30/06 5:15	24.65	368.05	277.36	388.83	619.33	455.14	421.07		419.04	473.49	462.60	395.85
9/30/06 5:30	24.65	368.05	277.35	388.82	619.33	455.14	421.06		419.04	473.49	462.61	395.85
9/30/06 5:45	24.65	368.05	277.35	388.82	619.33	455.14	421.05		419.04	473.49	462.62	395.84
9/30/06 6:00	24.65	368.05	277.34	388.82	619.33	455.14	421.06		419.04	473.50	462.62	395.85
9/30/06 6:15	24.65	368.05	277.35	388.82	619.33	455.14	421.07		419.04	473.50	462.61	395.84
9/30/06 6:30	24.65	368.05	277.36	388.82	619.33	455.14	421.07		419.04	473.50	462.62	395.84
9/30/06 6:45	24.65	368.05	277.35	388.82	619.33	455.14	421.06		419.04	473.50	462.62	395.85
9/30/06 7:00	24.64	368.05	277.34	388.82	619.33	455.14	421.07		419.04	473.50	462.62	395.84
9/30/06 7:15	24.64	368.05	277.35	388.82	619.34	455.14	421.07		419.04	473.50	462.62	395.84
9/30/06 7:30	24.65	368.05	277.35	388.82	619.34	455.14	421.07		419.04	473.49	462.61	395.84
9/30/06 7:45	24.64	368.05	277.35	388.82	619.34	455.14	421.09		419.04	473.49	462.61	395.84
9/30/06 8:00	24.65	368.05	277.35	388.82	619.33	455.14	421.11		419.04	473.49	462.62	395.84
9/30/06 8:15	24.64	368.05	277.35	388.82	619.33	455.14	421.11		419.04	473.49	462.61	395.84
9/30/06 8:30	24.63	368.05	277.34	388.82	619.34	455.14	421.11		419.05	473.49	462.62	395.84
9/30/06 8:45	24.63	368.05	277.34	388.80	619.33	455.14	421.11		419.04	473.49	462.61	395.84
9/30/06 9:00	24.63	368.05	277.34	388.82	619.33	455.14	421.12		419.04	473.49	462.62	395.83
9/30/06 9:15	24.62	368.05	277.34	388.83	619.33	455.14	421.12		419.04	473.49	462.61	395.84
9/30/06 9:30	24.62	368.05	277.34	388.82	619.33	455.14	421.11		419.04	473.49	462.62	395.83
9/30/06 9:45	24.61	368.04	277.34	388.82	619.33	455.14	421.11		419.04	473.49	462.61	395.83
9/30/06 10:00	24.61	368.04	277.33	388.85	619.33	455.14	421.11		419.04	473.48	462.61	395.83
9/30/06 10:15	24.61	368.04	277.33	388.80	619.33	455.14	421.11		419.04	473.48	462.61	395.83
9/30/06 10:30	24.60	368.04	277.33	388.80	619.33	455.13	421.11		419.04	473.49	462.60	395.83
9/30/06 10:45	24.59	368.04	277.33	388.82	619.33	455.13	421.11		419.04	473.49	462.60	395.82
9/30/06 11:00	24.59	368.04	277.32	388.78	619.33	455.13	421.10		419.04	473.49	462.60	395.82
9/30/06 11:15	24.58	368.04	277.32	388.80	619.32	455.13	421.11		419.03	473.49	462.60	395.81
9/30/06 11:30	24.58	368.04	277.32	388.78	619.32	455.13	421.11		419.04	473.48	462.59	395.81
9/30/06 11:45	24.58	368.04	277.32	388.82	619.32	455.13	421.10		419.03	473.49	462.60	395.80
9/30/06 12:00	24.57	368.04	277.31	388.80	619.31	455.12	421.10		419.02	473.49	462.59	395.80
9/30/06 12:15	24.57	368.04	277.31	388.80	619.31	455.12	421.09		419.03	473.49	462.59	395.80
9/30/06 12:30	24.56	368.04	277.31	388.80	619.31	455.11	421.09		419.02	473.49	462.59	395.79
9/30/06 12:45	24.56	368.04	277.30	388.82	619.31	455.11	421.09		419.02	473.49	462.59	395.79
9/30/06 13:00	24.56	368.04	277.31	388.80	619.31	455.11	421.09		419.02	473.49	462.59	395.79
9/30/06 13:15	24.54	368.04	277.30	388.80	619.31	455.11	421.10		419.01	473.49	462.58	395.79
9/30/06 13:30	24.54	368.04	277.29	388.80	619.30	455.10	421.09		419.01	473.49	462.57	395.79
9/30/06 13:45	24.53	368.04	277.29	388.75	619.30	455.10	421.08		419.01	473.50	462.57	395.78
9/30/06 14:00	24.52	368.04	277.28	388.77	619.29	455.09	421.09		419.00	473.50	462.56	395.77
9/30/06 14:15	24.52	368.04	277.27	388.78	619.29	455.09	421.08		419.00	473.50	462.56	395.77
9/30/06 14:30	24.52	368.04	277.28	388.73	619.29	455.09	421.08		419.00	473.50	462.56	395.76
9/30/06 14:45	24.51	368.04	277.27	388.73	619.28	455.09	421.08		418.99	473.50	462.55	395.76
9/30/06 15:00	24.50	368.04	277.26	388.72	619.28	455.08	421.07		419.00	473.51	462.55	395.75
9/30/06 15:15	24.50	368.04	277.27	388.70	619.28	455.08	421.07		418.99	473.51	462.54	395.75
9/30/06 15:30	24.50	368.04	277.25	388.68	619.28	455.08	421.07		418.98	473.51	462.55	395.74
9/30/06 15:45	24.49	368.04	277.25	388.70	619.27	455.08	421.06		418.98	473.51	462.55	395.74
9/30/06 16:00	24.48	368.04	277.25	388.67	619.27	455.07	421.07		418.98	473.51	462.54	395.74
9/30/06 16:15	24.49	368.04	277.25	388.72	619.27	455.06	421.06		418.98	473.51	462.54	395.73
9/30/06 16:30	24.49	368.04	277.25	388.77	619.27	455.07	421.06		418.98	473.51	462.54	395.74
9/30/06 16:45	24.48	368.04	277.25	388.77	619.27	455.06	421.05		418.98	473.52	462.54	395.74
9/30/06 17:00	24.48	368.04	277.25	388.77	619.27	455.06	421.05		418.97	473.52	462.54	395.74
9/30/06 17:15	24.48	368.04	277.24	388.77	619.27	455.06	421.04		418.98	473.52	462.53	395.73
9/30/06 17:30	24.48	368.04	277.24	388.75	619.27	455.06	421.03		418.97	473.51	462.52	395.73
9/30/06 17:45	24.48	368.04	277.24	388.77	619.27	455.06	421.02		418.97	473.52	462.53	395.73
9/30/06 18:00	24.48	368.04	277.24	388.75	619.27	455.06	421.01		418.97	473.52	462.53	395.72
9/30/06 18:15	24.48	368.04	277.24	388.75	619.27	455.06	420.99		418.97	473.52	462.53	395.72
9/30/06 18:30	24.48	368.04	277.23	388.73	619.26	455.06	420.97		418.97	473.43	462.53	395.72
9/30/06 18:45	24.49	368.04	277.23	388.73	619.27	455.06	420.95		418.97	473.42	462.53	395.72
9/30/06 19:00	24.50	368.04	277.24	388.72	619.26	455.06	420.95		418.97	473.42	462.52	395.72
9/30/06 19:15	24.51	368.04	277.24	388.70	619.26	455.06	420.97		418.97	473.42	462.53	395.72
9/30/06 19:30	24.51	368.04	277.25	388.72	619.27	455.06	420.96		418.97	473.41	462.53	395.71
9/30/06 19:45	24.51	368.04	277.24	388.72	619.27	455.06	420.97		418.98	473.41	462.53	395.72
9/30/06 20:00	24.52	368.05	277.24	388.73	619.27	455.06	420.97		418.97	473.41	462.53	395.72
9/30/06 20:15	24.52	368.05	277.24	388.72	619.27	455.07	420.97		418.97	473.41	462.52	395.72

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
9/30/06 20:30	24.53	368.05	277.24	388.73	619.27	455.06	420.96		418.98	473.41	462.54	395.72
9/30/06 20:45	24.53	368.05	277.25	388.72	619.27	455.07	420.97		418.98	473.41	462.53	395.72
9/30/06 21:00	24.54	368.05	277.24	388.72	619.27	455.07	420.97		418.98	473.41	462.54	395.72
9/30/06 21:15	24.54	368.05	277.24	388.70	619.27	455.07	420.97		418.98	473.41	462.54	395.71
9/30/06 21:30	24.54	368.05	277.24	388.72	619.27	455.07	420.97		418.98	473.41	462.54	395.72
9/30/06 21:45	24.54	368.05	277.24	388.72	619.27	455.07	420.97		418.98	473.41	462.54	395.72
9/30/06 22:00	24.54	368.05	277.24	388.72	619.27	455.06	420.97		418.98	473.41	462.54	395.72
9/30/06 22:15	24.54	368.05	277.24	388.70	619.27	455.06	420.97		418.98	473.41	462.54	395.71
9/30/06 22:30	24.54	368.05	277.24	388.70	619.27	455.07	420.97		418.98	473.42	462.54	395.71
9/30/06 22:45	24.54	368.05	277.24	388.70	619.27	455.07	420.97		418.98	473.42	462.53	395.71
9/30/06 23:00	24.54	368.05	277.24	388.70	619.27	455.06	420.96		418.98	473.42	462.53	395.71
9/30/06 23:15	24.54	368.05	277.24	388.70	619.27	455.06	420.97		418.98	473.42	462.53	395.71
9/30/06 23:30	24.54	368.05	277.24	388.70	619.27	455.06	420.97		418.98	473.42	462.53	395.71
9/30/06 23:45	24.54	368.05	277.24	388.70	619.27	455.07	420.99		418.98	473.42	462.53	395.71
10/1/06 0:00	24.54	368.05	277.23	388.70	619.27	455.06	421.00		418.98	473.42	462.53	395.71
10/1/06 0:15	24.54	368.05	277.24	388.70	619.27	455.06	421.00		418.98	473.42	462.53	395.70
10/1/06 0:30	24.53	368.05	277.23	388.72	619.27	455.06	421.00		418.98	473.43	462.52	395.70
10/1/06 0:45	24.54	368.05	277.23	388.68	619.27	455.06	421.01		418.98	473.43	462.52	395.70
10/1/06 1:00	24.53	368.05	277.24	388.70	619.27	455.06	421.01		418.98	473.43	462.54	395.70
10/1/06 1:15	24.53	368.05	277.23	388.68	619.27	455.07	421.01		418.98	473.43	462.53	395.70
10/1/06 1:30	24.53	368.05	277.23	388.68	619.27	455.07	421.01		418.98	473.42	462.52	395.70
10/1/06 1:45	24.54	368.05	277.23	388.68	619.27	455.07	421.00		418.98	473.43	462.53	395.70
10/1/06 2:00	24.54	368.05	277.24	388.68	619.27	455.07	421.00		418.98	473.43	462.53	395.70
10/1/06 2:15	24.54	368.05	277.23	388.68	619.27	455.07	420.99		418.98	473.43	462.54	395.70
10/1/06 2:30	24.54	368.05	277.23	388.70	619.27	455.07	420.99		418.98	473.43	462.53	395.70
10/1/06 2:45	24.53	368.05	277.23	388.70	619.27	455.07	421.00		418.99	473.43	462.54	395.70
10/1/06 3:00	24.53	368.05	277.24	388.68	619.28	455.07	421.00		418.98	473.43	462.54	395.70
10/1/06 3:15	24.53	368.05	277.24	388.70	619.28	455.07	421.00		418.99	473.43	462.54	395.70
10/1/06 3:30	24.53	368.05	277.24	388.72	619.28	455.07	421.00		418.99	473.44	462.54	395.70
10/1/06 3:45	24.53	368.05	277.24	388.73	619.28	455.07	421.00		418.99	473.44	462.54	395.70
10/1/06 4:00	24.52	368.05	277.24	388.68	619.28	455.07	421.00		418.99	473.44	462.54	395.70
10/1/06 4:15	24.52	368.05	277.24	388.70	619.28	455.07	421.00		418.99	473.44	462.54	395.70
10/1/06 4:30	24.53	368.05	277.24	388.68	619.28	455.07	421.00		418.99	473.44	462.54	395.70
10/1/06 4:45	24.53	368.05	277.24	388.67	619.28	455.08	420.99		418.99	473.44	462.55	395.70
10/1/06 5:00	24.53	368.05	277.23	388.70	619.28	455.08	421.00		418.99	473.45	462.55	395.70
10/1/06 5:15	24.53	368.05	277.23	388.68	619.29	455.08	421.00		419.00	473.45	462.55	395.70
10/1/06 5:30	24.53	368.05	277.24	388.68	619.29	455.08	420.99		419.00	473.44	462.55	395.70
10/1/06 5:45	24.54	368.05	277.24	388.68	619.29	455.09	420.99		419.00	473.44	462.55	395.70
10/1/06 6:00	24.53	368.05	277.25	388.68	619.29	455.09	420.99		419.00	473.44	462.56	395.71
10/1/06 6:15	24.53	368.05	277.26	388.70	619.29	455.09	421.00		419.00	473.45	462.55	395.71
10/1/06 6:30	24.54	368.05	277.24	388.68	619.29	455.09	421.00		419.01	473.44	462.56	395.70
10/1/06 6:45	24.54	368.05	277.25	388.70	619.29	455.09	420.99		419.00	473.45	462.56	395.71
10/1/06 7:00	24.55	368.05	277.25	388.70	619.30	455.10	421.00		419.01	473.44	462.56	395.71
10/1/06 7:15	24.55	368.05	277.26	388.70	619.30	455.10	421.01		419.01	473.44	462.57	395.71
10/1/06 7:30	24.56	368.05	277.26	388.72	619.31	455.11	421.01		419.02	473.44	462.57	395.72
10/1/06 7:45	24.56	368.05	277.26	388.72	619.31	455.11	421.02		419.02	473.43	462.57	395.72
10/1/06 8:00	24.56	368.05	277.27	388.72	619.31	455.12	421.03		419.03	473.43	462.57	395.72
10/1/06 8:15	24.56	368.05	277.27	388.72	619.31	455.11	421.04		419.03	473.43	462.57	395.72
10/1/06 8:30	24.57	368.05	277.27	388.72	619.31	455.12	421.05		419.03	473.43	462.58	395.72
10/1/06 8:45	24.56	368.05	277.27	388.72	619.32	455.12	421.07		419.03	473.43	462.57	395.73
10/1/06 9:00	24.55	368.05	277.27	388.70	619.32	455.11	421.08		419.03	473.43	462.59	395.72
10/1/06 9:15	24.56	368.05	277.27	388.70	619.32	455.12	421.09		419.03	473.43	462.58	395.72
10/1/06 9:30	24.55	368.05	277.26	388.72	619.32	455.12	421.09		419.04	473.42	462.58	395.73
10/1/06 9:45	24.55	368.04	277.27	388.72	619.32	455.12	421.10		419.03	473.42	462.58	395.73
10/1/06 10:00	24.55	368.04	277.27	388.70	619.32	455.12	421.10		419.03	473.42	462.58	395.72
10/1/06 10:15	24.55	368.04	277.27	388.70	619.32	455.12	421.09		419.03	473.42	462.59	395.72
10/1/06 10:30	24.54	368.04	277.26	388.70	619.32	455.12	421.09		419.03	473.42	462.59	395.72
10/1/06 10:45	24.54	368.04	277.27	388.70	619.32	455.12	421.10		419.03	473.42	462.59	395.72
10/1/06 11:00	24.53	368.04	277.26	388.70	619.32	455.12	421.10		419.03	473.41	462.58	395.72
10/1/06 11:15	24.53	368.04	277.26	388.70	619.32	455.12	421.10		419.03	473.41	462.58	395.71
10/1/06 11:30	24.52	368.04	277.27	388.68	619.31	455.11	421.10		419.03	473.41	462.57	395.71
10/1/06 11:45	24.52	368.04	277.27	388.64	619.32	455.11	421.09		419.02	473.41	462.58	395.71
10/1/06 12:00	24.52	368.04	277.25	388.62	619.31	455.11	421.09		419.02	473.41	462.57	395.71
10/1/06 12:15	24.51	368.04	277.25	388.60	619.31	455.11	421.10		419.02	473.42	462.57	395.70
10/1/06 12:30	24.50	368.04	277.24	388.64	619.31	455.10	421.08		419.01	473.41	462.57	395.70
10/1/06 12:45	24.50	368.04	277.24	388.60	619.31	455.10	421.09		419.02	473.41	462.57	395.70
10/1/06 13:00	24.49	368.04	277.24	388.59	619.30	455.10	421.07		419.01	473.41	462.56	395.69
10/1/06 13:15	24.48	368.04	277.23	388.60	619.30	455.09	421.03		419.00	473.42	462.55	395.69
10/1/06 13:30	24.48	368.04	277.23	388.60	619.29	455.09	421.02		419.01	473.42	462.54	395.68
10/1/06 13:45	24.48	368.04	277.23	388.60	619.29	455.08	421.01		419.00	473.42	462.55	395.68
10/1/06 14:00	24.47	368.04	277.22	388.60	619.29	455.08	421.03		418.99	473.42	462.54	395.67
10/1/06 14:15	24.47	368.04	277.22	388.60	619.28	455.08	421.03		419.00	473.42	462.54	395.66
10/1/06 14:30	24.47	368.04	277.21	388.59	619.28	455.07	421.01		418.99	473.42	462.54	395.65
10/1/06 14:45	24.47	368.04	277.21	388.60	619.28	455.07	421.06		418.98	473.42	462.52	395.65
10/1/06 15:00	24.46	368.04	277.21	388.57	619.28	455.07	421.04		418.98	473.42	462.52	395.65
10/1/06 15:15	24.46	368.04	277.21	388.60	619.27	455.07	421.03		418.98	473.42	462.52	395.65
10/1/06 15:30	24.45	368.04	277.20	388.60	619.27	455.06	421.04		418.98	473.42	462.52	395.65
10/1/06 15:45	24.45	368.04	277.19	388.59	619.27	455.05	421.01		418.97	473.41	462.52	395.65
10/1/06 16:00	24.45	368.04	277.20	388.59	619.27	455.07	421.01		418.98	473.42	462.52	395.65
10/1/06 16:15	24.45	368.04	277.20	388.60	619.27	455.06	421.02		418.97	473.41	462.51	395.65
10/1/06 16:30	24.45	368.04	277.19	388.60	619.27	455.06	421.01		418.97	473.41	462.51	395.64
10/1/06 16:45	24.46	368.04	277.19	388.60	619.27	455.05	420.97		418.97	473.41	462.52	395.64
10/1/06 17:00	24.46	368.04	277.19	388.60	619.27	455.06	420.97		418.97	473.42	462.51	395.64
10/1/06 17:15	24.46	368.04	277.19	388.60	619.27	455.06	420.97		418.97	473.42	462.51	395.64
10/1/06 17:30	24.47	368.04	277.20	388.60	619.27	455.06	421.01		418.97	473.41	462.51	395.64
10/1/06 17:45	24.47	368.04	277.19	388.60	619.27	455.06	420.98		418.97	473.41	462.51	395.64
10/1/06 18:00	24.47	368.04	277.19	388.60	619.27	455.06	420.96		418.97	473.41	462.51	395.64
10/1/06 18:15	24.48	368.04	277.19	388.60	619.27	455.06	420.95		418.97	473.41	462.51	395.64
10/1/06 18:30	24.48	368.04	277.19	388.60	619.27	455.06	420.96		418.97	473.41	462.52	395.64
10/1/06 18:45	24.49	368.04	277.19	388.60	619.27	455.06	420.95		418.97	473.41	462.52	395.64
10/1/06 19:00	24.50	368.04	277.19	388.60	619.27	455.06	420.94		418.97	473.41	462.51	395.64
10/1/06 19:15	24.51	368.04	277.20	388.62	619.28	455.06	420.96		418.98	473.41	462.52	395.64
10/1/06 19:30	24.51	368.04	277.20	388.62	619.28	455.07	420.96		418.98	473.41	462.52	395.65
10/1/06 19:45	24.52	368.05	277.20	388.62	619.28	455.07	420.97		418.98	473.40	462.53	395.64
10/1/06 20:00	24.53	368.05	277.21	388.62	619.28	455.07	420.97		418.98	473.40	462.53	395.65
10/1/06 20:15	24.53	368.05	277.21	388.60	619.28	455.08	420.98		418.99	473.40	462.53	395.65
10/1/06 20:30	24.54	368.05	277.21	388.62	619.29	455.08	420.97		418.99	473.40	462.52	395.65
10/1/06 20:45	24.54	368.05	277.21	388.62	619.29	455.08	420.98		418.99	473.40	462.53	395.64
10/1/06 21:00	24.54	368.05	277.21	388.60	619.29	455.08	420.98		418.99	473.40	462.53	395.65
10/1/06 21:15	24.55	368.05	277.21	388.62	619.29	455.08	420.99		418.99	473.40	462.54	395.65

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
10/1/06 21:30	24.55	368.05	277.21	388.62	619.29	455.08	420.99		419.00	473.40	462.54	395.65
10/1/06 21:45	24.55	368.05	277.21	388.64	619.29	455.09	420.98		418.99	473.40	462.54	395.65
10/1/06 22:00	24.55	368.05	277.21	388.64	619.29	455.09	420.98		419.00	473.40	462.54	395.65
10/1/06 22:15	24.56	368.05	277.21	388.64	619.30	455.09	420.99		419.00	473.39	462.54	395.65
10/1/06 22:30	24.56	368.05	277.21	388.64	619.30	455.09	420.98		419.00	473.39	462.54	395.65
10/1/06 22:45	24.56	368.05	277.21	388.64	619.30	455.09	420.98		419.00	473.39	462.54	395.65
10/1/06 23:00	24.56	368.05	277.21	388.65	619.30	455.09	420.98		419.00	473.39	462.54	395.65
10/1/06 23:15	24.57	368.05	277.21	388.64	619.30	455.09	421.00		419.00	473.39	462.54	395.65
10/1/06 23:30	24.57	368.05	277.21	388.64	619.30	455.09	420.99		419.00	473.39	462.54	395.65
10/1/06 23:45	24.58	368.05	277.22	388.65	619.30	455.09	421.00		419.00	473.38	462.54	395.65
10/2/06 0:00	24.58	368.05	277.22	388.65	619.30	455.10	420.99		419.01	473.38	462.54	395.65
10/2/06 0:15	24.59	368.05	277.21	388.64	619.30	455.10	421.00		419.01	473.38	462.54	395.65
10/2/06 0:30	24.59	368.05	277.22	388.64	619.30	455.10	421.00		419.01	473.38	462.54	395.65
10/2/06 0:45	24.59	368.05	277.22	388.64	619.30	455.10	421.00		419.01	473.38	462.55	395.65
10/2/06 1:00	24.59	368.05	277.22	388.64	619.30	455.10	421.00		419.01	473.38	462.54	395.65
10/2/06 1:15	24.59	368.05	277.22	388.64	619.30	455.10	421.00		419.01	473.38	462.54	395.65
10/2/06 1:30	24.59	368.05	277.22	388.65	619.31	455.09	420.99		419.01	473.38	462.54	395.64
10/2/06 1:45	24.59	368.05	277.22	388.62	619.30	455.10	420.99		419.01	473.37	462.54	395.65
10/2/06 2:00	24.60	368.05	277.22	388.62	619.31	455.10	421.00		419.01	473.37	462.54	395.65
10/2/06 2:15	24.60	368.05	277.22	388.60	619.31	455.10	421.00		419.01	473.37	462.54	395.65
10/2/06 2:30	24.60	368.05	277.22	388.60	619.31	455.10	420.99		419.01	473.37	462.55	395.65
10/2/06 2:45	24.60	368.05	277.22	388.60	619.31	455.10	421.00		419.01	473.37	462.54	395.64
10/2/06 3:00	24.60	368.05	277.22	388.64	619.31	455.10	421.00		419.01	473.37	462.55	395.65
10/2/06 3:15	24.60	368.05	277.22	388.64	619.31	455.10	421.00		419.01	473.37	462.56	395.65
10/2/06 3:30	24.60	368.05	277.22	388.64	619.31	455.10	421.00		419.01	473.37	462.54	395.65
10/2/06 3:45	24.61	368.05	277.22	388.62	619.31	455.11	421.00		419.02	473.37	462.56	395.64
10/2/06 4:00	24.61	368.05	277.23	388.64	619.31	455.11	421.01		419.02	473.37	462.56	395.65
10/2/06 4:15	24.61	368.05	277.22	388.64	619.31	455.11	421.01		419.02	473.37	462.56	395.64
10/2/06 4:30	24.61	368.05	277.22	388.64	619.32	455.11	421.02		419.02	473.37	462.56	395.65
10/2/06 4:45	24.61	368.05	277.23	388.65	619.32	455.11	421.02		419.02	473.37	462.57	395.65
10/2/06 5:00	24.61	368.05	277.23	388.65	619.32	455.12	421.02		419.03	473.37	462.57	395.65
10/2/06 5:15	24.61	368.05	277.23	388.64	619.33	455.12	421.02		419.03	473.37	462.57	395.65
10/2/06 5:30	24.61	368.05	277.23	388.64	619.33	455.12	421.02		419.03	473.37	462.57	395.65
10/2/06 5:45	24.62	368.05	277.23	388.65	619.33	455.12	421.01		419.03	473.37	462.57	395.65
10/2/06 6:00	24.61	368.05	277.23	388.65	619.33	455.12	421.02		419.03	473.38	462.58	395.65
10/2/06 6:15	24.61	368.05	277.23	388.65	619.33	455.13	421.02		419.03	473.38	462.57	395.65
10/2/06 6:30	24.61	368.05	277.24	388.65	619.34	455.13	421.02		419.04	473.38	462.58	395.65
10/2/06 6:45	24.62	368.05	277.24	388.65	619.34	455.13	421.03		419.04	473.38	462.58	395.65
10/2/06 7:00	24.62	368.05	277.24	388.65	619.34	455.14	421.03		419.04	473.38	462.58	395.66
10/2/06 7:15	24.62	368.05	277.25	388.65	619.35	455.14	421.03		419.04	473.38	462.59	395.67
10/2/06 7:30	24.62	368.05	277.25	388.64	619.35	455.14	421.04		419.05	473.38	462.59	395.67
10/2/06 7:45	24.63	368.05	277.25	388.67	619.35	455.15	421.05		419.05	473.38	462.59	395.66
10/2/06 8:00	24.62	368.05	277.26	388.65	619.35	455.15	421.08		419.06	473.38	462.59	395.67
10/2/06 8:15	24.62	368.05	277.26	388.65	619.35	455.15	421.09		419.06	473.39	462.59	395.67
10/2/06 8:30	24.61	368.05	277.26	388.65	619.35	455.15	421.12		419.06	473.39	462.59	395.67
10/2/06 8:45	24.61	368.05	277.25	388.65	619.36	455.15	421.12		419.06	473.39	462.60	395.67
10/2/06 9:00	24.61	368.05	277.26	388.65	619.36	455.15	421.12		419.06	473.39	462.60	395.67
10/2/06 9:15	24.60	368.04	277.25	388.64	619.36	455.15	421.13		419.06	473.39	462.60	395.67
10/2/06 9:30	24.60	368.04	277.26	388.65	619.36	455.16	421.13		419.06	473.39	462.61	395.67
10/2/06 9:45	24.59	368.04	277.26	388.65	619.36	455.16	421.13		419.06	473.39	462.61	395.67
10/2/06 10:00	24.59	368.04	277.26	388.65	619.36	455.16	421.13		419.06	473.39	462.61	395.67
10/2/06 10:15	24.58	368.04	277.26	388.65	619.36	455.15	421.13		419.06	473.39	462.60	395.67
10/2/06 10:30	24.58	368.04	277.26	388.64	619.36	455.15	421.13		419.06	473.39	462.61	395.66
10/2/06 10:45	24.57	368.04	277.26	388.65	619.36	455.15	421.12		419.06	473.39	462.60	395.67
10/2/06 11:00	24.57	368.04	277.24	388.65	619.35	455.15	421.09		419.06	473.39	462.59	395.67
10/2/06 11:15	24.56	368.04	277.25	388.65	619.35	455.16	421.12		419.07	473.39	462.60	395.66
10/2/06 11:30	24.56	368.04	277.24	388.64	619.35	455.15	421.09		419.05	473.39	462.59	395.65
10/2/06 11:45	24.57	368.04	277.24	388.64	619.35	455.15	421.06		419.05	473.39	462.59	395.65
10/2/06 12:00	24.56	368.04	277.24	388.64	619.35	455.14	421.07		419.05	473.39	462.59	395.65
10/2/06 12:15	24.57	368.04	277.24	388.62	619.35	455.14	421.05		419.05	473.38	462.59	395.65
10/2/06 12:30	24.58	368.04	277.23	388.62	619.35	455.14	421.07		419.05	473.38	462.59	395.65
10/2/06 12:45	24.58	368.04	277.23	388.62	619.35	455.14	421.04		419.05	473.37	462.59	395.64
10/2/06 13:00	24.58	368.04	277.23	388.62	619.35	455.14	421.04		419.05	473.37	462.59	395.64
10/2/06 13:15	24.59	328.60	277.23	388.62	619.34	455.14	421.04		419.04	473.37	462.58	395.65
10/2/06 13:30	24.59	328.62	277.23	388.62	619.33	455.13	421.04		419.05	473.36	462.59	395.65
10/2/06 13:45	24.58	328.62	277.22	388.62	619.34	455.13	421.05		419.05	473.36	462.57	395.64
10/2/06 14:00	24.58	328.62	277.22	388.62	619.33	455.13	421.04		419.03	473.36	462.57	395.63
10/2/06 14:15	24.58	328.61	277.21	388.65	619.33	455.12	421.05		419.03	473.36	462.57	395.63
10/2/06 14:30	24.58	328.61	277.21	388.62	619.33	455.12	421.05		419.03	473.36	462.57	395.62
10/2/06 14:45	24.58	328.61	277.21	388.60	619.32	455.12	421.06		419.03	473.35	462.57	395.63
10/2/06 15:00	24.59	328.60	277.21	388.60	619.32	455.11	421.05		419.03	473.35	462.57	395.62
10/2/06 15:15	24.59	328.61	277.21	388.59	619.32	455.12	421.04		419.03	473.34	462.57	395.62
10/2/06 15:30	24.59	328.61	277.21	388.59	619.32	455.11	421.03		419.02	473.35	462.57	395.61
10/2/06 15:45	24.60	328.61	277.21	388.59	619.32	455.12	421.02		419.02	473.33	462.57	395.61
10/2/06 16:00	24.61	328.61	277.21	388.60	619.32	455.12	421.01		419.03	473.33	462.57	395.61
10/2/06 16:15	24.59	328.61	277.20	388.57	619.32	455.11	421.03		419.03	473.34	462.56	395.61
10/2/06 16:30	24.58	328.60	277.20	388.59	619.31	455.11	421.08		419.02	473.34	462.55	395.61
10/2/06 16:45	24.58	328.59	277.19	388.57	619.32	455.11	421.06		419.01	473.34	462.55	395.60
10/2/06 17:00	24.58	328.59	277.19	388.57	619.31	455.10	421.06		419.01	473.35	462.55	395.60
10/2/06 17:15	24.58	328.58	277.19	388.59	619.31	455.10	421.01		419.01	473.34	462.55	395.60
10/2/06 17:30	24.57	328.59	277.19	388.57	619.31	455.10	421.00		419.01	473.35	462.54	395.60
10/2/06 17:45	24.57	328.59	277.19	388.59	619.31	455.10	421.00		419.01	473.35	462.54	395.60
10/2/06 18:00	24.57	328.58	277.18	388.57	619.31	455.10	421.00		419.01	473.35	462.54	395.60
10/2/06 18:15	24.57	328.58	277.18	388.57	619.31	455.10	420.99		419.01	473.35	462.54	395.59
10/2/06 18:30	24.58	328.58	277.18	388.57	619.31	455.10	421.00		419.01	473.35	462.54	395.59
10/2/06 18:45	24.58	328.58	277.19	388.57	619.31	455.10	421.00		419.01	473.35	462.54	395.59
10/2/06 19:00	24.59	328.58	277.18	388.57	619.31	455.10	421.00		419.01	473.35	462.54	395.59
10/2/06 19:15	24.60	328.58	277.19	388.59	619.31	455.11	421.00		419.01	473.35	462.55	395.59
10/2/06 19:30	24.59	328.59	277.19	388.59	619.31	455.11	421.00		419.01	473.36	462.54	395.59
10/2/06 19:45	24.60	328.58	277.19	388.57	619.31	455.11	421.00		419.01	473.36	462.55	395.59
10/2/06 20:00	24.60	328.59	277.19	388.59	619.32	455.11	421.00		419.02	473.36	462.54	395.59
10/2/06 20:15	24.59	328.59	277.19	388.59	619.31	455.11	421.01		419.01	473.36	462.54	395.60
10/2/06 20:30	24.60	328.58	277.19	388.59	619.31	455.11	421.01		419.02	473.36	462.54	395.59
10/2/06 20:45	24.60	328.58	277.19	388.57	619.31	455.11	421.01		419.01	473.36	462.54	395.59
10/2/06 21:00	24.60	328.59	277.19	388.59	619.31	455.11	421.01		419.02	473.36	462.54	395.59
10/2/06 21:15	24.60	328.59	277.19	388.59	619.32	455.11	421.03		419.02	473.37	462.54	395.60
10/2/06 21:30	24.60	328.59	277.20	388.59	619.32	455.12	421.03		419.02	473.37	462.55	395.59
10/2/06 21:45	24.60	328.59	277.19	388.59	619.32	455.11	421.03		419.02	473.37	462.55	395.59
10/2/06 22:00	24.60	328.59	277.20	388.57	619.32	455.12	421.03		419.02	473.37	462.55	395.59
10/2/06 22:15	24.60	328.59	277.20	388.59	619.32	455.12	421.03		419.02	473.37	462.55	395.59

Power Resources, Inc.
Regional Southwest Area Aquifer Tests
Appendix D-1 - 15-minute Depth to Water Data (All Monitoring Wells)

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
10/2/06 22:30	24.61	328.59	277.20	388.59	619.33	455.12	421.02		419.02	473.36	462.55	395.60
10/2/06 22:45	24.60	328.59	277.19	388.59	619.33	455.12	421.02		419.03	473.37	462.56	395.60
10/2/06 23:00	24.60	328.59	277.19	388.60	619.33	455.12	421.01		419.02	473.36	462.56	395.60
10/2/06 23:15	24.61	328.59	277.20	388.59	619.33	455.12	421.01		419.03	473.35	462.56	395.59
10/2/06 23:30	24.61	328.59	277.20	388.59	619.33	455.12	421.02		419.03	473.36	462.56	395.60
10/2/06 23:45	24.62	328.59	277.20	388.59	619.33	455.13	421.01		419.03	473.35	462.56	395.60
10/3/06 0:00	24.63	328.59	277.20	388.59	619.33	455.13	421.02		419.03	473.35	462.56	395.60
10/3/06 0:15	24.62	328.59	277.20	388.59	619.33	455.13	421.02		419.03	473.35	462.56	395.60
10/3/06 0:30	24.63	328.59	277.20	388.59	619.33	455.13	421.01		419.03	473.34	462.56	395.60
10/3/06 0:45	24.64	328.59	277.20	388.60	619.33	455.13	421.02		419.04	473.34	462.56	395.60
10/3/06 1:00	24.64	328.59	277.20	388.59	619.33	455.13	421.03		419.03	473.34	462.56	395.60
10/3/06 1:15	24.65	328.59	277.20	388.59	619.33	455.13	421.02		419.03	473.33	462.56	395.60
10/3/06 1:30	24.64	328.59	277.20	388.59	619.33	455.13	421.01		419.03	473.33	462.57	395.60
10/3/06 1:45	24.64	328.59	277.19	388.59	619.33	455.12	421.01		419.03	473.33	462.56	395.60
10/3/06 2:00	24.64	328.59	277.20	388.59	619.33	455.13	421.01		419.03	473.33	462.57	395.59
10/3/06 2:15	24.63	328.58	277.19	388.59	619.33	455.12	421.01		419.02	473.33	462.56	395.59
10/3/06 2:30	24.64	328.58	277.19	388.59	619.32	455.12	421.02		419.03	473.33	462.55	395.59
10/3/06 2:45	24.62	328.58	277.19	388.60	619.31	455.12	421.02		419.02	473.34	462.54	395.58
10/3/06 3:00	24.62	328.57	277.19	388.59	619.32	455.11	421.02		419.02	473.34	462.54	395.57
10/3/06 3:15	24.62	328.57	277.18	388.59	619.31	455.11	421.02		419.02	473.34	462.54	395.57
10/3/06 3:30	24.61	328.57	277.18	388.57	619.31	455.11	421.02		419.02	473.34	462.54	395.57
10/3/06 3:45	24.61	328.56	277.18	388.57	619.31	455.11	421.02		419.01	473.35	462.54	395.57
10/3/06 4:00	24.62	328.57	277.17	388.57	619.31	455.11	421.00		419.01	473.34	462.54	395.57
10/3/06 4:15	24.61	328.57	277.18	388.57	619.31	455.11	421.02		419.02	473.35	462.54	395.57
10/3/06 4:30	24.61	328.56	277.18	388.57	619.30	455.10	421.03		419.01	473.35	462.54	395.57
10/3/06 4:45	24.60	328.57	277.17	388.55	619.31	455.10	421.03		419.01	473.35	462.54	395.56
10/3/06 5:00	24.61	328.56	277.17	388.55	619.31	455.11	421.03		419.01	473.35	462.54	395.55
10/3/06 5:15	24.61	328.57	277.18	388.55	619.32	455.11	421.03		419.02	473.35	462.55	395.56
10/3/06 5:30	24.60	328.57	277.18	388.55	619.31	455.11	421.04		419.02	473.35	462.55	395.57
10/3/06 5:45	24.60	328.56	277.18	388.55	619.31	455.10	421.04		419.02	473.36	462.54	395.55
10/3/06 6:00	24.60	328.56	277.18	388.55	619.31	455.10	421.04		419.02	473.36	462.55	395.56
10/3/06 6:15	24.60	328.57	277.17	388.55	619.32	455.10	421.04		419.02	473.37	462.55	395.56
10/3/06 6:30	24.60	328.56	277.17	388.55	619.31	455.10	421.06		419.02	473.38	462.55	395.56
10/3/06 6:45	24.60	328.56	277.17	388.55	619.32	455.10	421.04		419.02	473.37	462.55	395.55
10/3/06 7:00	24.61	328.57	277.19	388.55	619.32	455.11	421.04		419.03	473.36	462.56	395.56
10/3/06 7:15	24.62	328.59	277.19	388.57	619.33	455.13	421.03		419.05	473.35	462.57	395.57
10/3/06 7:30	24.62	328.59	277.19	388.57	619.34	455.13	421.03		419.05	473.36	462.57	395.57
10/3/06 7:45	24.63	328.59	277.20	388.57	619.34	455.13	421.04		419.05	473.35	462.58	395.58
10/3/06 8:00	24.63	328.60	277.20	388.59	619.34	455.14	421.05		419.05	473.36	462.58	395.60
10/3/06 8:15	24.63	328.59	277.21	388.59	619.35	455.15	421.07		419.06	473.36	462.59	395.59
10/3/06 8:30	24.63	328.60	277.21	388.59	619.35	455.15	421.07		419.06	473.36	462.59	395.59
10/3/06 8:45	24.64	328.61	277.21	388.60	619.35	455.16	421.06		419.07	473.35	462.59	395.60
10/3/06 9:00	24.64	328.61	277.21	388.59	619.36	455.16	421.08		419.07	473.35	462.60	395.60
10/3/06 9:15	24.65	328.61	277.22	388.59	619.36	455.17	421.07		419.08	473.35	462.61	395.60
10/3/06 9:30	24.66	328.63	277.22	388.59	619.37	455.17	421.09		419.08	473.34	462.62	395.60
10/3/06 9:45	24.66	328.63	277.24	388.60	619.37	455.18	421.09		419.09	473.34	462.62	395.60
10/3/06 10:00	24.67	328.63	277.23	388.60	619.38	455.18	421.10		419.09	473.34	462.62	395.61
10/3/06 10:15	24.67	328.63	277.23	388.60	619.38	455.19	421.09		419.10	473.34	462.62	395.62
10/3/06 10:30	24.68	328.64	277.24	388.60	619.39	455.19	421.10		419.09	473.34	462.63	395.62
10/3/06 10:45	24.68	328.64	277.25	388.60	619.39	455.19	421.10		419.10	473.33	462.63	395.63
10/3/06 11:00	24.69	328.64	277.25	388.62	619.39	455.20	421.11		419.10	473.33	462.63	395.63
10/3/06 11:15	24.70	328.65	277.25	388.64	619.40	455.21	421.10		419.11	473.32	462.64	395.63
10/3/06 11:30	24.70	328.65	277.25	388.62	619.40	455.21	421.13		419.13	473.33	462.64	395.64
10/3/06 11:45	24.69	328.65	277.26	388.62	619.39	455.20	421.13		419.11	473.33	462.64	395.64
10/3/06 12:00	24.70	328.64	277.25	388.62	619.39	455.20	421.08		419.10	473.33	462.64	395.63
10/3/06 12:15	24.70	328.64	277.25	388.60	619.39	455.20	421.08		419.10	473.33	462.64	395.63
10/3/06 12:30	24.71	328.64	277.25	388.62	619.39	455.20	421.10		419.10	473.32	462.63	395.62
10/3/06 12:45	24.71	328.64	277.25	388.62	619.39	455.20	421.07		419.10	473.32	462.63	395.63
10/3/06 13:00	24.71	328.64	277.25	388.62	619.40	455.21	421.13		419.09	473.31	462.62	395.63
10/3/06 13:15	24.72	328.63	277.25	388.60	619.39	455.21	421.14		419.09	473.31	462.63	395.62
10/3/06 13:30	24.71	328.64	277.25	388.60	619.39	455.18	421.08		419.09	473.31	462.63	395.62
10/3/06 13:45	24.71	328.63	277.24	388.60	619.39	455.20	421.11		419.09	473.33	462.63	395.61
10/3/06 14:00	24.71	328.63	277.24	388.60	619.38	455.19	421.07		419.09	473.33	462.62	395.62
10/3/06 14:15	24.72	328.63	277.24	388.60	619.38	455.19	421.05		419.09	473.32	462.62	395.61
10/3/06 14:30	24.72	328.63	277.23	388.60	619.38	455.19	421.07		419.09	473.32	462.62	395.61
10/3/06 14:45	24.74	328.63	277.24	388.60	619.38	455.19	421.07		419.09	473.31	462.62	395.62
10/3/06 15:00	24.75	328.64	277.25	388.60	619.38	455.20	421.09		419.09	473.30	462.61	395.60
10/3/06 15:15	24.75	328.63	277.23	388.60	619.38	455.18	421.07		419.10	473.30	462.62	395.61
10/3/06 15:30	24.76	328.62	277.23	388.60	619.38	455.18	421.06		419.08	473.31	462.62	395.60
10/3/06 15:45	24.76	328.63	277.23	388.60	619.38	455.19	421.06		419.09	473.33	462.61	395.61
10/3/06 16:00	24.76	328.63	277.23	388.60	619.38	455.18	421.09		419.08	473.33	462.62	395.60
10/3/06 16:15	24.77	328.62	277.23	388.60	619.38	455.19	421.07		419.08	473.33	462.62	395.60
10/3/06 16:30	24.77	328.62	277.23	388.60	619.37	455.19	421.07		419.08	473.33	462.62	395.60
10/3/06 16:45	24.78	328.62	277.23	388.60	619.38	455.18	421.06		419.08	473.32	462.62	395.60
10/3/06 17:00	24.79	328.62	277.24	388.60	619.38	455.19	421.06		419.08	473.32	462.62	395.60
10/3/06 17:15	24.79	328.62	277.24	388.62	619.37	455.19	421.07		419.08	473.33	462.62	395.60
10/3/06 17:30	24.79	328.62	277.23	388.60	619.38	455.19	421.06		419.08	473.34	462.62	395.60
10/3/06 17:45	24.81	328.62	277.23	388.60	619.38	455.19	421.07		419.09	473.34	462.62	395.60
10/3/06 18:00	24.82	328.63	277.24	388.60	619.39	455.20	421.09		419.09	473.34	462.62	395.60
10/3/06 18:15	24.82	328.62	277.24	388.62	619.39	455.20	421.08		419.10	473.34	462.62	395.61
10/3/06 18:30	24.83	328.63	277.24	388.62	619.39	455.20	421.09		419.10	473.34	462.63	395.60
10/3/06 18:45	24.84	328.63	277.25	388.62	619.40	455.21	421.10		419.10	473.34	462.63	395.62
10/3/06 19:00	24.84	328.64	277.25	388.64	619.40	455.21	421.10		419.10	473.34	462.64	395.62
10/3/06 19:15	24.84	328.64	277.25	388.64	619.40	455.21	421.11		419.10	473.34	462.63	395.62
10/3/06 19:30	24.85	328.64	277.25	388.64	619.41	455.22	421.11		419.11	473.35	462.64	395.62
10/3/06 19:45	24.86	328.64	277.26	388.64	619.41	455.22	421.11		419.11	473.34	462.65	395.63
10/3/06 20:00	24.87	328.65	277.27	388.64	619.42	455.23	421.12		419.12	473.37	462.65	395.64
10/3/06 20:15	24.87	328.66	277.27	388.65	619.43	455.24	421.11		419.13	473.37	462.66	395.63
10/3/06 20:30	24.88	328.66	277.27	388.67	619.43	455.24	421.12		419.13	473.38	462.66	395.65
10/3/06 20:45	24.88	328.66	277.28	388.65	619.43	455.25	421.13		419.14	473.38	462.67	395.65
10/3/06 21:00	24.89	328.67	277.28	388.65	619.44	455.25	421.13		419.14	473.38	462.67	395.65
10/3/06 21:15	24.90	328.67	277.28	388.67	619.44	455.25	421.13		419.14	473.38	462.67	395.65
10/3/06 21:30	24.90	328.67	277.29	388.67	619.44	455.26	421.14		419.14	473.38	462.67	395.65
10/3/06 21:45	24.90	328.67	277.29	388.67	619.45	455.26	421.14		419.15	473.38	462.67	395.65
10/3/06 22:00	24.90	328.67	277.29	388.67	619.45	455.26	421.15		419.15	473.39	462.68	395.66
10/3/06 22:15	24.90	328.68	277.29	388.67	619.45	455.26	421.15		419.15	473.39	462.68	395.67
10/3/06 22:30	24.90	328.68	277.29	388.67	619.45	455.26	421.15		419.15	473.39	462.68	395.66
10/3/06 22:45	24.91	328.68	277.29	388.68	619.45	455.27	421.15		419.15	473.39	462.68	395.66
10/3/06 23:00	24.90	328.68	277.29	388.67	619.45	455.27	421.16		419.15	473.39	462.68	395.65
10/3/06 23:15	24.90	328.68	277.29	388.68	619.45	455.26	421.16		419.15	473.39	462.68	395.65

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
10/3/06 23:30	24.91	328.68	277.29	388.68	619.45	455.27	421.16		419.15	473.39	462.68	395.66
10/3/06 23:45	24.91	328.68	277.29	388.67	619.46	455.27	421.16		419.16	473.39	462.68	395.66
10/4/06 0:00	24.91	328.68	277.29	388.68	619.45	455.27	421.16		419.15	473.39	462.68	395.65
10/4/06 0:15	24.90	328.68	277.29	388.67	619.45	455.27	421.15		419.15	473.39	462.68	395.65
10/4/06 0:30	24.90	328.68	277.29	388.67	619.45	455.26	421.16		419.15	473.39	462.67	395.66
10/4/06 0:45	24.90	328.67	277.28	388.67	619.45	455.26	421.15		419.15	473.38	462.67	395.65
10/4/06 1:00	24.90	328.67	277.28	388.67	619.45	455.26	421.15		419.15	473.39	462.67	395.65
10/4/06 1:15	24.90	328.66	277.28	388.65	619.44	455.25	421.15		419.14	473.39	462.67	395.65
10/4/06 1:30	24.90	328.66	277.28	388.67	619.44	455.26	421.14		419.14	473.38	462.67	395.64
10/4/06 1:45	24.91	328.66	277.28	388.65	619.44	455.26	421.14		419.14	473.38	462.67	395.64
10/4/06 2:00	24.91	328.66	277.28	388.67	619.44	455.26	421.14		419.14	473.37	462.67	395.65
10/4/06 2:15	24.91	328.66	277.27	388.68	619.44	455.25	421.14		419.14	473.37	462.67	395.65
10/4/06 2:30	24.92	328.66	277.27	388.67	619.44	455.25	421.14		419.14	473.37	462.67	395.65
10/4/06 2:45	24.92	328.66	277.27	388.67	619.44	455.25	421.14		419.14	473.37	462.67	395.64
10/4/06 3:00	24.92	328.66	277.27	388.67	619.44	455.25	421.13		419.14	473.36	462.66	395.64
10/4/06 3:15	24.92	328.65	277.27	388.65	619.44	455.25	421.13		419.14	473.36	462.66	395.64
10/4/06 3:30	24.91	328.65	277.27	388.65	619.43	455.25	421.14		419.13	473.37	462.66	395.64
10/4/06 3:45	24.91	328.65	277.26	388.65	619.43	455.24	421.13		419.13	473.36	462.66	395.63
10/4/06 4:00	24.91	328.65	277.26	388.64	619.43	455.24	421.14		419.13	473.37	462.65	395.62
10/4/06 4:15	24.90	328.64	277.26	388.64	619.43	455.24	421.14		419.13	473.37	462.65	395.61
10/4/06 4:30	24.90	328.64	277.26	388.64	619.43	455.24	421.14		419.13	473.37	462.65	395.62
10/4/06 4:45	24.90	328.64	277.25	388.64	619.43	455.24	421.14		419.13	473.37	462.65	395.62
10/4/06 5:00	24.90	328.64	277.25	388.64	619.43	455.24	421.13		419.12	473.37	462.65	395.62
10/4/06 5:15	24.90	328.64	277.26	388.64	619.43	455.24	421.13		419.13	473.37	462.65	395.61
10/4/06 5:30	24.90	328.64	277.25	388.65	619.43	455.24	421.13		419.13	473.36	462.65	395.62
10/4/06 5:45	24.91	328.64	277.26	388.64	619.43	455.24	421.13		419.13	473.36	462.65	395.62
10/4/06 6:00	24.90	328.64	277.26	388.64	619.43	455.24	421.13		419.13	473.37	462.66	395.62
10/4/06 6:15	24.90	328.64	277.26	388.64	619.43	455.24	421.13		419.13	473.37	462.65	395.62
10/4/06 6:30	24.90	328.64	277.26	388.64	619.43	455.25	421.14		419.13	473.37	462.66	395.62
10/4/06 6:45	24.90	328.64	277.26	388.64	619.43	455.25	421.14		419.13	473.37	462.66	395.62
10/4/06 7:00	24.91	328.64	277.26	388.64	619.44	455.25	421.13		419.14	473.37	462.66	395.61
10/4/06 7:15	24.92	328.65	277.27	388.65	619.44	455.26	421.14		419.14	473.37	462.67	395.62
10/4/06 7:30	24.92	328.66	277.27	388.65	619.45	455.26	421.14		419.15	473.37	462.67	395.64
10/4/06 7:45	24.92	328.66	277.28	388.65	619.45	455.26	421.14		419.15	473.37	462.67	395.63
10/4/06 8:00	24.93	328.66	277.28	388.65	619.46	455.27	421.15		419.16	473.37	462.67	395.64
10/4/06 8:15	24.93	328.67	277.28	388.67	619.46	455.27	421.15		419.16	473.38	462.68	395.64
10/4/06 8:30	24.93	328.67	277.28	388.67	619.46	455.28	421.16		419.16	473.38	462.68	395.63
10/4/06 8:45	24.92	328.67	277.28	388.67	619.46	455.27	421.17		419.16	473.39	462.68	395.65
10/4/06 9:00	24.92	328.67	277.29	388.65	619.46	455.27	421.18		419.16	473.40	462.68	395.65
10/4/06 9:15	24.92	328.67	277.29	388.65	619.46	455.28	421.19		419.16	473.40	462.68	395.64
10/4/06 9:30	24.91	328.67	277.29	388.65	619.46	455.28	421.20		419.17	473.40	462.69	395.65
10/4/06 9:45	24.91	328.67	277.29	388.65	619.46	455.29	421.21		419.16	473.41	462.69	395.64
10/4/06 10:00	24.91	328.68	277.29	388.67	619.46	455.29	421.20		419.17	473.41	462.70	395.64
10/4/06 10:15	24.91	328.68	277.29	388.67	619.46	455.28	421.21		419.17	473.41	462.70	395.64
10/4/06 10:30	24.91	328.68	277.30	388.67	619.47	455.29	421.22		419.17	473.41	462.70	395.64
10/4/06 10:45	24.91	328.68	277.30	388.67	619.46	455.29	421.22		419.17	473.41	462.70	395.64
10/4/06 11:00	24.90	328.68	277.30	388.67	619.47	455.29	421.23		419.18	473.42	462.70	395.64
10/4/06 11:15	24.90	328.68	277.30	388.65	619.46	455.29	421.23		419.18	473.42	462.70	395.65
10/4/06 11:30	24.90	328.68	277.28	388.65	619.46	455.28	421.22		419.17	473.42	462.69	395.64
10/4/06 11:45	24.89	328.68	277.28	388.65	619.46	455.29	421.23		419.17	473.43	462.69	395.64
10/4/06 12:00	24.88	328.68	277.28	388.65	619.46	455.29	421.22		419.16	473.42	462.69	395.63
10/4/06 12:15	24.88	328.68	277.30	388.64	619.45	455.29	421.23		419.17	473.43	462.68	395.62
10/4/06 12:30	24.87	328.66	277.27	388.62	619.45	455.29	421.22		419.16	473.43	462.68	395.64
10/4/06 12:45	24.86	328.66	277.27	388.64	619.45	455.28	421.21		419.15	473.43	462.68	395.62
10/4/06 13:00	24.85	328.66	277.27	388.62	619.45	455.27	421.21					395.62
10/4/06 13:15	24.84	328.65	277.26	388.62	619.44	455.27	421.19					395.60
10/4/06 13:30	24.83	328.65	277.26	388.60	619.43	455.27	421.21					395.60
10/4/06 13:45	24.83	328.64	277.26	388.60	619.43	455.26	421.19					395.59
10/4/06 14:00	24.82	328.64	277.25	388.60	619.43	455.26	421.20					395.60
10/4/06 14:15	24.82	328.63	277.25	388.60	619.43	455.24	421.20					395.58
10/4/06 14:30	24.81	328.63	277.23	388.59	619.42	455.24	421.19					395.59
10/4/06 14:45	24.81	328.61	277.23	388.59	619.42	455.24	421.20					395.57
10/4/06 15:00	24.79	328.61	277.22	388.55	619.41	455.23	421.20					395.57
10/4/06 15:15	24.79	328.60	277.22	388.55	619.41	455.22	421.19					395.55
10/4/06 15:30	24.79	328.60	277.21	388.54	619.41	455.22	421.18		419.11	473.44		395.56
10/4/06 15:45	24.79	328.59	277.21	388.54	619.40	455.21	421.18		419.10	473.43		395.55
10/4/06 16:00	24.78	328.59	277.21	388.54	619.39	455.21	421.16		419.10	473.44		395.55
10/4/06 16:15	24.78	328.59	277.20	388.54	619.39	455.21	421.15		419.09	473.43		395.55
10/4/06 16:30	24.78	328.57	277.19	388.54	619.39	455.20	421.14		419.09	473.44		395.54
10/4/06 16:45	24.78	328.58	277.19	388.52	619.38	455.20	421.13		419.08	473.44		395.54
10/4/06 17:00	24.78	328.57	277.19	388.52	619.38	455.20	421.12		419.08	473.44		395.52
10/4/06 17:15	24.77	328.57	277.18	388.52	619.38	455.19	421.12		419.08	473.44		395.53
10/4/06 17:30	24.77	328.57	277.18	388.52	619.37	455.19	421.13		419.08	473.44		395.52
10/4/06 17:45	24.77	328.57	277.18	388.52	619.37	455.19	421.12		419.08	473.44		395.52
10/4/06 18:00	24.77	328.57	277.18	388.50	619.37	455.19	421.12		419.08	473.44		395.52
10/4/06 18:15	24.77	328.56	277.18	388.50	619.37	455.19	421.10		419.07	473.44		395.52
10/4/06 18:30	24.77	328.56	277.18	388.50	619.38	455.18	421.09		419.07	473.44		395.52
10/4/06 18:45	24.78	328.56	277.18	388.50	619.38	455.19	421.09		419.08	473.44		395.52
10/4/06 19:00	24.78	328.56	277.18	388.50	619.38	455.19	421.08		419.08	473.44		395.53
10/4/06 19:15	24.78	328.56	277.18	388.50	619.38	455.19	421.07		419.08	473.44		395.52
10/4/06 19:30	24.78	328.57	277.19	388.50	619.38	455.19	421.08		419.08	473.44		395.52
10/4/06 19:45	24.79	328.57	277.19	388.50	619.38	455.20	421.08		419.08	473.44		395.52
10/4/06 20:00	24.79	328.57	277.19	388.52	619.39	455.20	421.08		419.09	473.44		395.53
10/4/06 20:15	24.79	328.57	277.19	388.54	619.39	455.20	421.08		419.09	473.44		395.53
10/4/06 20:30	24.80	328.57	277.20	388.50	619.39	455.20	421.09		419.09	473.44		395.53
10/4/06 20:45	24.80	328.58	277.20	388.52	619.40	455.21	421.09		419.10	473.44		395.54
10/4/06 21:00	24.81	328.58	277.20	388.52	619.41	455.22	421.10		419.10	473.45		395.54
10/4/06 21:15	24.79	328.58	277.21	388.50	619.41	455.21	421.11		419.10	473.46		395.54
10/4/06 21:30	24.80	328.59	277.21	388.50	619.41	455.22	421.12		419.11	473.46		395.54
10/4/06 21:45	24.80	328.58	277.21	388.52	619.42	455.22	421.11		419.11	473.46		395.55
10/4/06 22:00	24.81	328.59	277.21	388.52	619.42	455.22	421.12		419.11	473.46		395.55
10/4/06 22:15	24.80	328.59	277.21	388.52	619.42	455.22	421.12		419.11	473.46		395.55
10/4/06 22:30	24.81	328.59	277.21	388.52	619.42	455.23	421.11		419.11	473.46		395.55
10/4/06 22:45	24.80	328.59	277.22	388.52	619.42	455.23	421.12		419.12	473.46		395.55
10/4/06 23:00	24.81	328.59	277.22	388.52	619.43	455.23	421.12		419.12	473.46		395.55
10/4/06 23:15	24.80	328.59	277.21	388.52	619.43	455.23	421.11		419.12	473.47		395.55
10/4/06 23:30	24.79	328.59	277.21	388.52	619.42	455.23	421.12		419.11	473.47		395.55
10/4/06 23:45	24.79	328.59	277.21	388.50	619.42	455.22	421.11		419.11	473.47		395.55
10/5/06 0:00	24.79	328.58	277.21	388.52	619.42	455.22	421.11		419.11	473.48		395.55
10/5/06 0:15	24.79	328.58	277.20	388.52	619.42	455.22	421.11		419.11	473.48		395.55

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
10/5/06 0:30	24.79	328.58	277.21	388.50	619.42	455.22	421.10		419.11	473.48		395.55
10/5/06 0:45	24.78	328.57	277.20	388.50	619.41	455.22	421.11		419.11	473.48		395.55
10/5/06 1:00	24.78	328.57	277.20	388.50	619.41	455.21	421.10		419.10	473.47		395.54
10/5/06 1:15	24.78	328.57	277.19	388.50	619.41	455.21	421.10		419.10	473.47		395.54
10/5/06 1:30	24.79	328.57	277.19	388.49	619.41	455.21	421.09		419.10	473.47		395.53
10/5/06 1:45	24.79	328.57	277.19	388.52	619.41	455.21	421.11		419.10	473.46		395.54
10/5/06 2:00	24.79	328.57	277.19	388.49	619.41	455.21	421.10		419.10	473.46		395.53
10/5/06 2:15	24.79	328.56	277.19	388.49	619.40	455.20	421.10		419.09	473.46		395.53
10/5/06 2:30	24.79	328.56	277.18	388.49	619.40	455.20	421.11		419.09	473.46		395.52
10/5/06 2:45	24.78	328.56	277.18	388.49	619.40	455.20	421.11		419.09	473.46		395.52
10/5/06 3:00	24.78	328.55	277.17	388.49	619.39	455.20	421.10		419.09	473.46		395.51
10/5/06 3:15	24.78	328.55	277.17	388.47	619.39	455.19	421.10		419.08	473.46		395.51
10/5/06 3:30	24.78	328.55	277.16	388.47	619.39	455.18	421.10		419.08	473.46		395.50
10/5/06 3:45	24.78	328.54	277.16	388.45	619.38	455.18	421.09		419.08	473.46		395.50
10/5/06 4:00	24.77	328.54	277.16	388.45	619.38	455.18	421.10		419.07	473.45		395.49
10/5/06 4:15	24.78	328.53	277.16	388.45	619.38	455.18	421.09		419.07	473.45		395.50
10/5/06 4:30	24.78	328.53	277.16	388.45	619.38	455.18	421.09		419.07	473.44		395.49
10/5/06 4:45	24.78	328.53	277.15	388.45	619.38	455.18	421.09		419.07	473.44		395.49
10/5/06 5:00	24.78	328.52	277.15	388.45	619.37	455.17	421.09		419.07	473.44		395.49
10/5/06 5:15	24.78	328.53	277.15	388.45	619.38	455.17	421.08		419.07	473.44		395.49
10/5/06 5:30	24.78	328.53	277.15	388.50	619.37	455.17	421.08		419.07	473.44		395.49
10/5/06 5:45	24.78	328.52	277.15	388.45	619.37	455.17	421.08		419.07	473.44		395.49
10/5/06 6:00	24.78	328.53	277.15	388.52	619.38	455.18	421.09		419.07	473.43		395.48
10/5/06 6:15	24.78	328.53	277.15	388.50	619.38	455.18	421.10		419.07	473.44		395.48
10/5/06 6:30	24.78	328.52	277.15	388.50	619.38	455.18	421.09		419.07	473.44		395.49
10/5/06 6:45	24.78	328.53	277.16	388.47	619.38	455.18	421.09		419.07	473.43		395.48
10/5/06 7:00	24.78	328.53	277.15	388.47	619.38	455.18	421.10		419.07	473.44		395.48
10/5/06 7:15	24.78	328.53	277.15	388.47	619.38	455.18	421.10		419.08	473.44		395.48
10/5/06 7:30	24.78	328.53	277.16	388.47	619.39	455.18	421.11		419.08	473.44		395.49
10/5/06 7:45	24.78	328.54	277.16	388.47	619.39	455.19	421.12		419.08	473.45		395.49
10/5/06 8:00	24.78	328.54	277.16	388.47	619.39	455.19	421.12		419.09	473.44		395.49
10/5/06 8:15	24.79	328.54	277.17	388.49	619.40	455.20	421.14		419.09	473.44		395.49
10/5/06 8:30	24.79	328.55	277.17	388.49	619.40	455.20	421.14		419.10	473.44		395.49
10/5/06 8:45	24.78	328.55	277.19	388.49	619.40	455.21	421.15		419.10	473.45		395.50
10/5/06 9:00	24.78	328.56	277.18	388.50	619.41	455.21	421.16		419.10	473.45		395.50
10/5/06 9:15	24.78	328.56	277.18	388.50	619.41	455.21	421.16		419.10	473.45		395.50
10/5/06 9:30	24.78	328.56	277.19	388.50	619.42	455.22	421.17		419.11	473.45		395.50
10/5/06 9:45	24.78	328.56	277.19	388.52	619.43	455.22	421.17		419.11	473.46		395.50
10/5/06 10:00	24.78	328.56	277.19	388.52	619.43	455.23	421.17		419.12	473.45		395.51
10/5/06 10:15	24.78	328.57	277.19	388.52	619.43	455.23	421.18		419.12	473.46		395.51
10/5/06 10:30	24.78	328.57	277.20	388.52	619.44	455.24	421.19		419.13	473.46		395.50
10/5/06 10:45	24.78	328.57	277.20	388.55	619.44	455.24	421.20		419.13	473.46		395.49
10/5/06 11:00	24.77	328.57	277.20	388.55	619.44				419.13	473.46		395.50
10/5/06 11:15	24.77	328.57	277.20	388.54	619.44				419.13	473.47		395.50
10/5/06 11:30	24.77	328.57	277.20	388.54	619.44				419.13	473.47		395.50
10/5/06 11:45	24.76	328.57	277.20	388.55	619.44				419.13	473.48		395.50
10/5/06 12:00	24.76	328.57	277.20	388.54	619.44				419.13	473.48		395.50
10/5/06 12:15	24.75	328.57	277.19	388.54	619.44				419.13	473.48		395.50
10/5/06 12:30	24.74	328.56	277.19	388.52	619.43				419.12	473.48		395.50
10/5/06 12:45	24.74	328.56	277.19	388.52	619.43				419.12	473.48		395.49
10/5/06 13:00	24.74	328.55	277.18	388.52	619.43				419.12	473.48		395.48
10/5/06 13:15	24.74	328.56	277.18	388.52	619.43				419.12	473.50		395.49
10/5/06 13:30	24.73	328.55	277.17	388.52	619.42				419.11	473.49		395.48
10/5/06 13:45	24.72	328.55	277.17	388.50	619.42				419.11	473.49		395.47
10/5/06 14:00	24.72	328.54	277.17	388.50	619.41				419.10	473.49		395.47
10/5/06 14:15	24.72	328.53	277.16	388.50	619.41				419.10	473.49		395.46
10/5/06 14:30	24.71	328.53	277.16	388.50	619.41	455.21	421.16	435.87	419.10	473.49		395.45
10/5/06 14:45	24.71	328.52	277.15	388.50	619.40	455.21	421.16	435.86	419.09	473.49		395.45
10/5/06 15:00	24.70	328.52	277.15	388.49	619.39	455.20	421.15	435.86	419.09	473.49		395.45
10/5/06 15:15	24.69	328.51	277.15	388.47	619.39	455.20	421.14	435.85	419.08	473.49		395.45
10/5/06 15:30	24.68	328.51	277.13	388.47	619.39	455.19	421.13	435.84	419.08	473.49		395.44
10/5/06 15:45	24.68	328.50	277.12	388.47	619.38	455.18	421.09	435.84	419.07	473.49		395.43
10/5/06 16:00	24.67	328.50	277.12	388.45	619.38	455.18	421.08	435.84	419.06	473.49		395.42
10/5/06 16:15	24.67	328.49	277.12	388.45	619.37	455.18	421.07	435.82	419.06	473.49		395.42
10/5/06 16:30	24.66	328.49	277.12	388.45	619.37	455.17	421.06	435.83	419.06	473.49		395.41
10/5/06 16:45	24.66	328.48	277.11	388.45	619.37	455.17	421.05	435.82	419.05	473.48		395.40
10/5/06 17:00	24.66	328.48	277.11	388.45	619.36	455.17	421.05	435.81	419.05	473.48		395.40
10/5/06 17:15	24.66	328.48	277.10	388.45	619.36	455.16	421.04	435.81	419.05	473.48		395.40
10/5/06 17:30	24.66	328.48	277.10	388.44	619.36	455.16	421.04	435.80	419.05	473.49		395.40
10/5/06 17:45	24.67	328.47	277.10	388.44	619.36	455.16	421.03	435.80	419.04	473.48		395.40
10/5/06 18:00	24.67	328.47	277.10	388.44	619.36	455.16	421.03	435.80	419.04	473.48		395.40
10/5/06 18:15	24.67	328.47	277.10	388.44	619.36	455.16	421.03	435.80	419.04	473.48		395.40
10/5/06 18:30	24.67	328.47	277.10	388.44	619.36	455.16	421.02	435.80	419.05	473.48		395.40
10/5/06 18:45	24.67	328.47	277.10	388.45	619.36	455.16	421.03	435.79	419.04	473.48		395.40
10/5/06 19:00	24.68	328.46	277.10	388.44	619.36	455.16	421.03	435.79	419.04	473.48		395.40
10/5/06 19:15	24.68	328.47	277.10	388.44	619.36	455.16	421.03	435.80	419.05	473.48		395.40
10/5/06 19:30	24.68	328.47	277.10	388.45	619.36	455.16	421.03	435.79	419.05	473.49		395.40
10/5/06 19:45	24.69	328.47	277.10	388.47	619.37	455.16	421.03	435.79	419.05	473.48		395.40
10/5/06 20:00	24.69	328.48	277.10	388.47	619.37	455.17	421.03	435.79	419.05	473.49		395.40
10/5/06 20:15	24.69	328.48	277.11	388.47	619.37	455.17	421.03	435.80	419.05	473.49		395.40
10/5/06 20:30	24.69	328.48	277.11	388.45	619.37	455.17	421.03	435.79	419.06	473.49		395.40
10/5/06 20:45	24.69	328.48	277.12	388.45	619.37	455.17	421.04	435.80	419.06	473.50		395.40
10/5/06 21:00	24.70	328.48	277.12	388.45	619.38	455.18	421.04	435.81	419.07	473.50		395.41
10/5/06 21:15	24.70	328.49	277.12	388.45	619.38	455.18	421.06	435.81	419.07	473.50		395.41
10/5/06 21:30	24.71	328.49	277.12	388.45	619.39	455.19	421.07	435.81	419.07	473.50		395.41
10/5/06 21:45	24.70	328.49	277.12	388.45	619.39	455.19	421.06	435.81	419.07	473.51		395.41
10/5/06 22:00	24.70	328.50	277.13	388.45	619.39	455.19	421.07	435.81	419.08	473.51		395.42
10/5/06 22:15	24.70	328.49	277.13	388.45	619.39	455.20	421.08	435.82	419.08	473.51		395.42
10/5/06 22:30	24.69	328.50	277.13	388.45	619.39	455.20	421.08	435.81	419.08	473.52		395.42
10/5/06 22:45	24.69	328.50	277.13	388.45	619.39	455.20	421.07	435.81	419.08	473.52		395.42
10/5/06 23:00	24.69	328.50	277.13	388.47	619.40	455.20	421.06	435.81	419.08	473.52		395.42
10/5/06 23:15	24.68	328.50	277.13	388.45	619.40	455.20	421.07	435.81	419.08	473.53		395.42
10/5/06 23:30	24.69	328.50	277.13	388.45	619.40	455.20	421.07	435.81	419.09	473.53		395.42
10/5/06 23:45	24.68	328.50	277.14	388.45	619.40	455.20	421.08	435.81	419.09	473.53		395.41
10/6/06 0:00	24.68	328.50	277.13	388.45	619.39	455.20	421.08	435.80	419.08	473.54		395.41
10/6/06 0:15	24.68	328.50	277.13	388.44	619.39	455.20	421.08	435.80	419.08	473.54		395.41
10/6/06 0:30	24.68	328.49	277.13	388.44	619.39	455.20	421.08	435.80	419.08	473.54		395.42
10/6/06 0:45	24.68	328.49	277.13	388.44	619.39	455.20	421.09	435.80	419.08	473.54		395.41
10/6/06 1:00	24.68	328.49	277.12	388.44	619.39	455.19	421.08	435.79	419.08	473.54		395.40
10/6/06 1:15	24.67	328.49	277.12	388.45	619.39	455.19	421.07	435.79	419.08	473.54		395.41

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
10/6/06 1:30	24.67	328.48	277.12	388.47	619.39	455.19	421.07	435.78	419.08	473.54		395.41
10/6/06 1:45	24.66	328.48	277.11	388.44	619.38	455.19	421.07	435.78	419.07	473.54		395.40
10/6/06 2:00	24.65	328.47	277.11	388.47	619.37	455.18	421.09	435.77	419.07	473.55		395.40
10/6/06 2:15	24.65	328.47	277.11	388.45	619.37	455.17	421.09	435.76	419.06	473.55		395.39
10/6/06 2:30	24.66	328.47	277.10	388.44	619.37	455.17	421.10	435.76	419.06	473.54		395.39
10/6/06 2:45	24.65	328.47	277.10	388.44	619.37	455.17	421.10	435.76	419.06	473.54		395.38
10/6/06 3:00	24.65	328.46	277.09	388.44	619.36	455.16	421.10	435.75	419.05	473.53		395.38
10/6/06 3:15	24.65	328.46	277.09	388.42	619.35	455.16	421.10	435.75	419.05	473.53		395.38
10/6/06 3:30	24.64	328.45	277.08	388.40	619.35	455.15	421.10	435.73	419.05	473.53		395.38
10/6/06 3:45	24.64	328.44	277.08	388.40	619.34	455.15	421.09	435.73	419.04	473.53		395.37
10/6/06 4:00	24.63	328.44	277.07	388.40	619.34	455.14	421.09	435.73	419.03	473.53		395.36
10/6/06 4:15	24.63	328.43	277.06	388.40	619.33	455.14	421.08	435.71	419.03	473.53		395.36
10/6/06 4:30	24.62	328.43	277.06	388.40	619.33	455.13	421.08	435.71	419.03	473.54		395.35
10/6/06 4:45	24.62	328.42	277.05	388.37	619.33	455.13	421.07	435.70	419.02	473.53		395.34
10/6/06 5:00	24.63	328.42	277.06	388.37	619.33	455.13	421.06	435.71	419.02	473.52		395.34
10/6/06 5:15	24.61	328.42	277.04	388.37	619.32	455.12	421.06	435.70	419.01	473.53		395.34
10/6/06 5:30	24.61	328.41	277.04	388.37	619.32	455.12	421.06	435.69	419.02	473.53		395.33
10/6/06 5:45	24.62	328.41	277.04	388.37	619.31	455.11	421.05	435.69	419.01	473.52		395.33
10/6/06 6:00	24.62	328.41	277.04	388.37	619.31	455.11	421.04	435.69	419.01	473.52		395.33
10/6/06 6:15	24.61	328.41	277.04	388.37	619.32	455.12	421.04	435.70	419.01	473.52		395.32
10/6/06 6:30	24.61	328.40	277.04	388.37	619.31	455.11	421.05	435.69	419.01	473.52		395.32
10/6/06 6:45	24.62	328.41	277.04	388.35	619.31	455.11	421.04	435.69	419.01	473.51		395.32
10/6/06 7:00	24.62	328.41	277.04	388.35	619.32	455.11	421.04	435.69	419.01	473.51		395.32
10/6/06 7:15	24.62	328.41	277.04	388.37	619.32	455.12	421.04	435.69	419.01	473.51		395.32
10/6/06 7:30	24.62	328.41	277.04	388.37	619.32	455.12	421.05	435.69	419.01	473.51		395.32
10/6/06 7:45	24.62	328.41	277.04	388.37	619.33	455.12	421.05	435.69	419.02	473.51		395.33
10/6/06 8:00	24.61	328.41	277.05	388.37	619.32	455.12	421.06	435.69	419.02	473.52		395.33
10/6/06 8:15	24.61	328.41	277.04	388.37	619.32	455.12	421.06	435.68	419.02	473.53		395.32
10/6/06 8:30	24.62	328.42	277.05	388.37	619.33	455.13	421.05	435.70	419.02	473.52		395.31
10/6/06 8:45	24.62	328.41	277.05	388.35	619.33	455.13	421.07	435.69	419.03	473.52		395.32
10/6/06 9:00	24.62	328.43	277.06	388.37	619.33	455.14	421.07	435.70	419.03	473.52		395.33
10/6/06 9:15	24.63	328.43	277.06	388.39	619.34	455.15	421.08	435.71	419.02	473.50		395.34
10/6/06 9:30	24.63	328.43	277.07	388.40	619.35	455.15	421.07	435.71	419.02	473.50		395.35
10/6/06 9:45	24.63	328.44	277.07	388.39	619.35	455.15	421.07	435.72	419.02	473.49		395.35
10/6/06 10:00	24.63	328.44	277.07	388.39	619.35	455.16	421.09	435.71	419.02	473.49		395.35
10/6/06 10:15	24.63	328.44	277.07	388.40	619.35	455.16	421.09	435.72	419.02	473.49		395.36
10/6/06 10:30	24.63	328.44	277.08	388.40	619.36	455.16	421.10	435.73	419.02	473.49		395.35
10/6/06 10:45	24.62	328.45	277.08	388.40	619.36	455.16	421.11	435.73	419.02	473.49		395.36
10/6/06 11:00	24.62	328.45	277.08	388.39	619.36	455.16	421.10	435.73	419.02	473.49		395.36
10/6/06 11:15	24.61	328.45	277.08	388.40	619.36	455.17	421.11	435.73	419.02	473.50		395.36
10/6/06 11:30	24.61	328.45	277.08	388.40	619.36	455.17	421.11	435.73	419.03	473.50		395.36
10/6/06 11:45	24.61	328.45	277.08	388.39	619.37	455.17	421.12	435.73	419.02	473.50		395.36
10/6/06 12:00	24.60	328.46	277.08	388.37	619.37	455.17	421.11	435.73	419.03	473.50		395.36
10/6/06 12:15	24.60	328.45	277.09	388.44	619.37	455.17	421.10	435.73	419.02	473.50		395.36
10/6/06 12:30	24.60	328.45	277.08	388.42	619.36	455.17	421.11	435.73	419.02	473.51		395.36
10/6/06 12:45	24.59	328.44	277.08	388.42	619.37	455.17	421.11	435.72	419.02	473.51		395.36
10/6/06 13:00	24.58	328.45	277.08	388.40	619.37	455.17	421.11	435.72	419.02	473.51		395.36
10/6/06 13:15	24.58	328.44	277.08	388.40	619.36	455.17	421.11	435.71	419.01	473.51		395.36
10/6/06 13:30	24.57	328.44	277.07	388.40	619.36	455.16	421.11	435.70	419.01	473.51		395.35
10/6/06 13:45	24.57	328.43	277.06	388.40	619.36	455.16	421.11	435.70	419.01	473.52		395.35
10/6/06 14:00	24.56	328.43	277.06	388.39	619.35	455.15	421.11	435.70	419.00	473.52		395.34
10/6/06 14:15	24.56	328.42	277.06	388.39	619.35	455.15	421.10	435.70	418.99	473.52		395.34
10/6/06 14:30	24.55	328.42	277.06	388.39	619.35	455.14	421.10	435.68	418.99	473.52		395.34
10/6/06 14:45	24.55	328.41	277.05	388.39	619.35	455.14	421.09	435.68	418.99	473.51		395.31
10/6/06 15:00	24.54	328.41	277.04	388.37	619.35	455.14	421.08	435.68	418.98	473.51		395.32
10/6/06 15:15	24.54	328.40	277.04	388.37	619.35	455.13	421.06	435.67	418.98	473.51		395.32
10/6/06 15:30	24.54	328.40	277.04	388.37	619.35	455.13	421.06	435.67	418.98	473.51		395.32
10/6/06 15:45	24.54	328.40	277.03	388.35	619.34	455.12	421.05	435.66	418.97	473.51		395.31
10/6/06 16:00	24.54	328.39	277.03	388.37	619.34	455.12	421.06	435.65	418.97	473.51		395.31
10/6/06 16:15	24.54	328.39	277.03	388.35	619.34	455.12	421.05	435.65	418.97	473.50		395.31
10/6/06 16:30	24.53	328.39	277.02	388.35	619.35	455.11	421.05	435.65	418.97	473.50		395.30
10/6/06 16:45	24.54	328.38	277.02	388.34	619.34	455.11	421.04	435.65	418.96	473.50		395.30
10/6/06 17:00	24.54	328.38	277.01	388.34	619.35	455.11	421.03	435.64	418.96	473.49		395.30
10/6/06 17:15	24.54	328.38	277.01	388.35	619.34	455.11	421.02	435.64	418.96	473.49		395.29
10/6/06 17:30	24.55	328.38	277.01	388.34	619.34	455.11	421.01	435.64	418.95	473.48		395.29
10/6/06 17:45	24.55	328.38	277.02	388.34	619.35	455.10	421.00	435.63	418.96	473.49		395.29
10/6/06 18:00	24.54	328.37	277.01	388.31	619.35	455.10	421.00	435.62	418.95	473.49		395.29
10/6/06 18:15	24.53	328.37	277.00	388.34	619.35	455.09	421.00	435.61	418.94	473.49		395.28
10/6/06 18:30	24.53	328.36	277.00	388.34	619.35	455.09	420.99	435.61	418.94	473.48		395.27
10/6/06 18:45	24.54	328.36	277.00	388.34	619.36	455.09	420.98	435.62	418.94	473.47		395.27
10/6/06 19:00	24.55	328.37	277.01	388.34	619.37	455.10	420.97	435.62	418.95	473.46		395.27
10/6/06 19:15	24.56	328.37	277.01	388.37	619.38	455.10	420.97	435.62	418.95	473.46		395.28
10/6/06 19:30	24.55	328.37	277.00	388.35	619.38	455.10	420.99	435.62	418.95	473.47		395.29
10/6/06 19:45	24.56	328.37	277.01	388.34	619.39	455.10	420.99	435.62	418.96	473.46		395.28
10/6/06 20:00	24.56	328.38	277.01	388.35	619.40	455.11	421.00	435.62	418.96	473.47		395.28
10/6/06 20:15	24.56	328.38	277.01	388.35	619.40	455.10	420.98	435.62	418.96	473.47		395.29
10/6/06 20:30	24.56	328.39	277.02	388.35	619.42	455.11	420.99	435.62	418.97	473.48		395.29
10/6/06 20:45	24.56	328.38	277.02	388.34	619.42	455.11	420.99	435.63	418.96	473.47		395.29
10/6/06 21:00	24.57	328.39	277.02	388.39	619.43	455.12	421.00	435.63	419.00	473.47		395.30
10/6/06 21:15	24.57	328.39	277.02	388.39	619.45	455.12	421.00	435.64	419.00	473.48		395.31
10/6/06 21:30	24.57	328.39	277.01	388.39	619.44	455.12	421.01	435.63	418.98	473.48		395.31
10/6/06 21:45	24.56	328.39	277.01	388.39	619.45	455.12	421.02	435.62	418.98	473.48		395.30
10/6/06 22:00	24.55	328.39	277.02	388.37	619.46	455.13	421.02	435.62	418.99	473.50		395.31
10/6/06 22:15	24.55	328.39	277.03	388.37	619.47	455.12	421.03	435.62	418.99	473.50		395.31
10/6/06 22:30	24.54	328.39	277.04	388.37	619.47	455.12	421.04	435.63	419.00	473.51		395.30
10/6/06 22:45	24.52	328.39	277.02	388.39	619.48	455.12	421.05	435.62	419.01	473.53		395.29
10/6/06 23:00	24.52	328.39	277.02	388.37	619.48	455.12	421.05	435.62	419.01	473.48		395.30
10/6/06 23:15	24.53	328.39	277.03	388.37	619.49	455.12	421.05	435.62	419.02	473.47		395.30
10/6/06 23:30	24.53	328.39	277.03	388.37	619.50	455.13	421.05	435.62	419.02	473.48		395.30
10/6/06 23:45	24.51	328.39	277.03	388.37	619.51	455.13	421.07	435.62	419.03	473.50		395.31
10/7/06 0:00	24.51	328.38	277.02	388.37	619.51	455.12	421.07	435.62	419.01	473.49		395.31
10/7/06 0:15	24.52	328.39	277.02	388.37	619.52	455.13	421.06	435.62	419.01	473.49		395.30
10/7/06 0:30	24.50	328.39	277.02	388.37	619.53	455.13	421.07	435.62	419.02	473.50		395.30
10/7/06 0:45	24.50	328.39	277.02	388.37	619.53	455.12	421.07	435.62	419.01	473.50		395.31
10/7/06 1:00	24.50	328.39	277.02	388.37	619.54	455.12	421.06	435.61	419.00	473.50		395.30
10/7/06 1:15	24.50	328.39	277.01	388.35	619.54	455.12	421.07	435.60	418.99	473.50		395.30
10/7/06 1:30	24.50	328.38	277.01	388.34	619.55	455.12	421.07	435.60	418.98	473.50		395.30
10/7/06 1:45	24.49	328.38	277.01	388.34	619.55	455.11	421.06	435.60	418.97	473.50		395.30
10/7/06 2:00	24.49	328.38	277.01	388.34	619.56	455.11	421.06	435.59	418.97	473.50		395.30

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
10/7/06 2:15	24.50	328.38	277.00	388.34	619.56	455.11	421.06	435.59	418.99	473.49		395.30
10/7/06 2:30	24.49	328.38	277.01	388.34	619.57	455.11	421.05	435.59	418.99	473.49		395.29
10/7/06 2:45	24.49	328.37	277.00	388.34	619.57	455.10	421.06	435.58	418.99	473.49		395.28
10/7/06 3:00	24.49	328.37	277.00	388.34	619.58	455.10	421.05	435.58	419.00	473.49		395.28
10/7/06 3:15	24.48	328.37	276.99	388.34	619.57	455.10	421.06	435.57	419.02	473.49		395.28
10/7/06 3:30	24.49	328.37	276.98	388.34	619.59	455.09	421.03	435.57	419.02	473.48		395.27
10/7/06 3:45	24.48	328.36	276.98	388.34	619.58	455.08	421.03	435.56	419.04	473.49		395.28
10/7/06 4:00	24.48	328.36	276.97	388.32	619.59	455.08	421.02	435.55	419.02	473.47		395.26
10/7/06 4:15	24.47	328.35	276.97	388.31	619.59	455.07	421.03	435.54	419.03	473.46		395.26
10/7/06 4:30	24.47	328.35	276.96	388.32	619.61	455.07	421.02	435.54	419.01	473.45		395.26
10/7/06 4:45	24.48	328.35	276.97	388.32	619.61	455.07	421.00	435.54	419.02	473.44		395.25
10/7/06 5:00	24.49	328.35	276.96	388.31	619.61	455.06	420.99	435.54	418.96	473.43		395.25
10/7/06 5:15	24.51	328.35	276.96	388.31	619.63	455.07	420.98	435.54	418.91	473.42		395.26
10/7/06 5:30	24.49	328.35	276.96	388.31	619.63	455.06	420.98	435.54	418.91	473.42		395.26
10/7/06 5:45	24.49	328.34	276.96	388.31	619.63	455.06	420.99	435.53	418.90	473.43		395.26
10/7/06 6:00	24.49	328.34	276.95	388.31	619.63	455.06	420.98	435.52	418.90	473.43		395.26
10/7/06 6:15	24.50	328.34	276.95	388.31	619.64	455.06	420.96	435.52	418.90	473.41		395.25
10/7/06 6:30	24.51	328.35	276.95	388.31	619.66	455.07	420.95	435.53	418.90	473.41		395.26
10/7/06 6:45	24.50	328.35	276.95	388.32	619.67	455.06	420.96	435.53	418.90	473.41		395.27
10/7/06 7:00	24.50	328.34	276.95	388.31	619.67	455.06	420.97	435.52	418.90	473.41		395.26
10/7/06 7:15	24.50	328.34	276.95	388.29	619.67	455.05	420.97	435.52	418.90	473.41		395.26
10/7/06 7:30	24.50	328.35	276.95	388.29	619.69	455.05	420.96	435.52	418.90	473.41		395.26
10/7/06 7:45	24.51	328.35	276.95	388.29	619.69	455.06	420.96	435.52	418.90	473.41		395.26
10/7/06 8:00	24.52	328.36	276.96	388.29	619.70	455.06	420.97	435.53	418.90	473.40		395.26
10/7/06 8:15	24.52	328.37	276.96	388.31	619.72	455.07	420.98	435.52	418.91	473.39		395.27
10/7/06 8:30	24.51	328.37	276.96	388.31	619.73	455.07	421.00	435.52	418.91	473.40		395.28
10/7/06 8:45	24.50	328.37	276.96	388.31	619.74	455.07	421.02	435.53	418.91	473.40		395.28
10/7/06 9:00	24.51	328.37	276.96	388.31	619.75	455.07	421.00	435.53	418.90	473.39		395.28
10/7/06 9:15	24.51	328.38	276.97	388.31	619.76	455.08	421.03	435.54	418.91	473.40		395.29
10/7/06 9:30	24.51	328.37	276.98	388.31	619.78	455.08	421.01	435.54	418.92	473.40		395.29
10/7/06 9:45	24.51	328.38	276.97	388.32	619.79	455.09	421.04	435.54	418.92	473.40		395.30
10/7/06 10:00	24.51	328.39	276.97	388.31	619.80	455.08	421.03	435.54	418.92	473.41		395.31
10/7/06 10:15	24.50	328.39	276.98	388.32	619.81	455.09	421.03	435.54	418.92	473.41		395.30
10/7/06 10:30	24.50	328.39	276.98	388.31	619.81	455.09	421.03	435.54	418.93	473.41		395.31
10/7/06 10:45	24.50	328.39	276.98	388.29	619.83	455.10	421.04	435.55	418.93	473.41		395.31
10/7/06 11:00	24.50	328.41	276.97	388.27	619.84	455.09	421.01	435.55	418.93	473.41		395.32
10/7/06 11:15	24.50	328.40	276.98	388.32	619.85	455.11	421.04	435.55	418.94	473.41		395.31
10/7/06 11:30	24.50	328.41	276.99	388.34	619.88	455.13	421.06	435.55	418.96	473.42		395.31
10/7/06 11:45	24.50	328.41	276.98	388.35	619.88	455.10	421.05	435.56	418.94	473.41		395.31
10/7/06 12:00	24.51	328.41	276.98	388.31	619.89	455.11	421.05	435.55	418.96	473.41		395.32
10/7/06 12:15	24.51	328.42	276.99	388.34	619.89	455.10	421.05	435.56	418.95	473.42		395.32
10/7/06 12:30	24.51	328.43	277.01	388.34	619.90	455.12	421.05	435.56	418.97	473.41		395.33
10/7/06 12:45	24.51	328.43	276.99	388.34	619.92	455.12	421.05	435.57	418.96	473.41		395.34
10/7/06 13:00	24.51	328.44	277.00	388.34	619.93	455.13	421.06	435.57	418.97	473.42		395.35
10/7/06 13:15	24.52	328.44	277.00	388.35	619.95	455.12	421.05	435.57	418.97	473.41		395.35
10/7/06 13:30	24.52	328.44	277.00	388.34	619.95	455.13	421.08	435.56	418.98	473.41		395.35
10/7/06 13:45	24.52	328.44	276.99	388.35	619.97	455.11	421.01	435.57	418.96	473.40		395.36
10/7/06 14:00	24.53	328.44	276.99	388.34	619.98	455.14	421.04	435.56	418.97	473.41		395.36
10/7/06 14:15	24.53	328.45	276.99	388.34	619.98	455.14	421.04	435.57	418.98	473.41		395.36
10/7/06 14:30	24.53	328.45	276.98	388.32	619.99	455.12	421.00	435.56	418.98	473.40		395.36
10/7/06 14:45	24.53	328.45	276.99	388.32	619.99	455.13	421.05	435.57	418.99	473.40		395.37
10/7/06 15:00	24.54	328.45	276.98	388.31	620.01	455.12	421.06	435.56	418.98	473.40		395.36
10/7/06 15:15	24.53	328.46	276.98	388.31	620.01	455.13	421.02	435.55	418.98	473.40		395.36
10/7/06 15:30	24.54	328.46	276.98	388.31	620.02	455.12	421.02	435.55	418.99	473.40		395.37
10/7/06 15:45	24.53	328.47	276.99	388.32	620.03	455.13	421.02	435.55	418.98	473.39		395.36
10/7/06 16:00	24.55	328.46	276.99	388.34	620.04	455.12	421.00	435.55	418.96	473.38		395.36
10/7/06 16:15	24.56	328.46	277.00	388.35	620.05	455.12	421.00	435.54	418.97	473.37		395.37
10/7/06 16:30	24.56	328.46	276.99	388.34	620.06	455.12	420.99	435.54	418.97	473.36		395.37
10/7/06 16:45	24.56	328.46	276.99	388.34	620.06	455.12	421.00	435.54	418.97	473.37		395.39
10/7/06 17:00	24.57	328.47	276.99	388.35	620.07	455.12	420.99	435.55	418.97	473.35		395.38
10/7/06 17:15	24.58	328.47	276.99	388.35	620.09	455.11	421.00	435.54	418.98	473.35		395.40
10/7/06 17:30	24.58	328.47	276.99	388.34	620.09	455.12	421.01	435.55	418.98	473.35		395.39
10/7/06 17:45	24.60	328.47	276.99	388.34	620.10	455.12	420.99	435.54	418.98	473.34		395.40
10/7/06 18:00	24.61	328.48	277.00	388.35	620.12	455.13	421.00	435.54	418.98	473.33		395.40
10/7/06 18:15	24.61	328.48	277.00	388.37	620.12	455.13	421.00	435.55	418.98	473.33		395.41
10/7/06 18:30	24.63	328.49	276.99	388.37	620.12	455.12	421.00	435.55	418.98	473.32		395.41
10/7/06 18:45	24.64	328.49	277.01	388.39	620.15	455.14	421.01	435.55	418.99	473.31		395.42
10/7/06 19:00	24.65	328.50	277.01	388.37	620.16	455.14	421.01	435.56	418.99	473.30		395.43
10/7/06 19:15	24.67	328.51	277.02	388.39	620.18	455.14	421.01	435.55	418.99	473.30		395.43
10/7/06 19:30	24.68	328.52	277.03	388.39	620.18	455.15	421.02	435.56	419.00	473.29		395.45
10/7/06 19:45	24.69	328.52	277.03	388.40	620.19	455.16	421.02	435.57	419.00	473.29		395.45
10/7/06 20:00	24.70	328.53	277.03	388.40	620.21	455.16	421.02	435.57	419.01	473.29		395.45
10/7/06 20:15	24.71	328.54	277.03	388.40	620.22	455.16	421.02	435.57	419.01	473.29		395.47
10/7/06 20:30	24.71	328.54	277.04	388.42	620.23	455.17	421.03	435.57	419.01	473.28		395.47
10/7/06 20:45	24.73	328.55	277.05	388.42	620.25	455.17	421.03	435.59	419.02	473.28		395.48
10/7/06 21:00	24.73	328.56	277.05	388.44	620.26	455.18	421.04	435.59	419.02	473.28		395.49
10/7/06 21:15	24.74	328.57	277.06	388.44	620.28	455.19	421.04	435.59	419.03	473.28		395.49
10/7/06 21:30	24.74	328.57	277.07	388.45	620.29	455.20	421.05	435.60	419.04	473.27		395.50
10/7/06 21:45	24.75	328.59	277.07	388.45	620.31	455.21	421.06	435.61	419.04	473.28		395.51
10/7/06 22:00	24.75	328.60	277.08	388.45	620.32	455.22	421.07	435.61	419.05	473.28		395.53
10/7/06 22:15	24.76	328.60	277.09	388.44	620.34	455.21	421.07	435.62	419.05	473.28		395.53
10/7/06 22:30	24.77	328.61	277.09	388.45	620.35	455.23	421.08	435.62	419.07	473.28		395.54
10/7/06 22:45	24.78	328.62	277.10	388.47	620.37	455.23	421.09	435.62	419.07	473.27		395.55
10/7/06 23:00	24.78	328.63	277.10	388.47	620.38	455.24	421.09	435.63	419.07	473.28		395.56
10/7/06 23:15	24.78	328.64	277.10	388.47	620.39	455.24	421.09	435.64	419.08	473.28		395.57
10/7/06 23:30	24.78	328.64	277.10	388.49	620.40	455.25	421.10	435.64	419.08	473.28		395.57
10/7/06 23:45	24.78	328.65	277.11	388.47	620.41	455.25	421.11	435.64	419.09	473.29		395.58
10/8/06 0:00	24.79	328.65	277.12	388.47	620.42	455.25	421.11	435.64	419.08	473.29		395.59
10/8/06 0:15	24.79	328.66	277.12	388.49	620.44	455.26	421.10	435.65	419.10	473.29		395.58
10/8/06 0:30	24.80	328.66	277.12	388.49	620.45	455.26	421.11	435.65	419.10	473.29		395.60
10/8/06 0:45	24.80	328.67	277.12	388.52	620.46	455.27	421.11	435.65	419.10	473.35		395.60
10/8/06 1:00	24.81	328.68	277.13	388.49	620.47	455.27	421.11	435.65	419.10	473.35		395.61
10/8/06 1:15	24.81	328.68	277.13	388.50	620.48	455.27	421.16	435.65	419.10	473.35		395.62
10/8/06 1:30	24.82	328.69	277.12	388.50	620.50	455.27	421.17	435.65	419.11	473.35		395.62
10/8/06 1:45	24.82	328.69	277.13	388.50	620.51	455.27	421.17	435.66	419.11	473.34		395.62
10/8/06 2:00	24.83	328.69	277.13	388.50	620.52	455.28	421.17	435.66	419.11	473.34		395.63
10/8/06 2:15	24.84	328.70	277.13	388.52	620.53	455.28	421.17	435.66	419.11	473.33		395.64
10/8/06 2:30	24.85	328.70	277.14	388.50	620.54	455.28	421.17	435.66	419.12	473.33		395.65
10/8/06 2:45	24.85	328.70	277.14	388.52	620.54	455.28	421.17	435.66	419.12	473.33		395.65
10/8/06 3:00	24.85	328.71	277.14	388.52	620.55	455.28	421.17	435.66	419.12	473.33		395.65

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
10/8/06 3:15	24.85	328.70	277.13	388.52	620.56	455.28	421.17	435.66	419.12	473.32		395.65
10/8/06 3:30	24.86	328.71	277.13	388.52	620.57	455.28	421.17	435.65	419.11	473.32		395.65
10/8/06 3:45	24.86	328.70	277.13	388.52	620.58	455.28	421.17	435.65	419.11	473.31		395.65
10/8/06 4:00	24.87	328.71	277.13	388.52	620.58	455.27	421.17	529.53	419.11	473.31		395.66
10/8/06 4:15	24.87	328.71	277.13	388.52	620.59	455.27	421.17	529.53	419.11	473.32		395.66
10/8/06 4:30	24.87	328.71	277.12	388.52	620.59	455.27	421.17	529.53	419.11	473.32		395.66
10/8/06 4:45	24.87	328.71	277.12	388.54	620.60	455.26	421.16	529.53	419.10	473.31		395.66
10/8/06 5:00	24.87	328.71	277.12	388.50	620.60	455.26	421.16	529.53	419.10	473.31		395.66
10/8/06 5:15	24.87	328.71	277.11	388.54	620.61	455.25	421.16	529.53	419.10	473.31		395.65
10/8/06 5:30	24.87	328.71	277.11	388.50	620.61	455.25	421.15	529.53	419.09	473.30		395.66
10/8/06 5:45	24.87	328.71	277.11	388.50	620.62	455.25	421.15	529.53	419.09	473.30		395.65
10/8/06 6:00	24.88	328.71	277.10	388.50	620.62	455.25	421.15	529.53	419.09	473.29		395.65
10/8/06 6:15	24.88	328.71	277.10	388.50	620.63	455.24	421.15	529.53	419.09	473.29		395.65
10/8/06 6:30	24.88	328.71	277.10	388.50	620.64	455.24	421.14	529.53	419.09	473.28		395.66
10/8/06 6:45	24.89	328.71	277.10	388.60	620.64	455.24	421.14	529.53	419.09	473.28		395.66
10/8/06 7:00	24.89	328.72	277.10	388.67	620.65	455.24	421.14	529.53	419.08	473.28		395.66
10/8/06 7:15	24.89	328.72	277.10	388.68	620.66	455.24	421.14	529.53	419.09	473.27		395.66
10/8/06 7:30	24.90	328.72	277.10	388.57	620.67	455.24	421.14	529.53	419.09	473.27		395.67
10/8/06 7:45	24.89	328.72	277.09	388.73	620.67	455.24	421.14	529.53	419.08	473.27		395.67
10/8/06 8:00	24.89	328.73	277.09	388.78	620.68	455.24	421.14	529.53	419.08	473.27		395.67
10/8/06 8:15	24.89	328.73	277.09	388.80	620.69	455.24	421.14	529.53	419.08	473.27		395.68
10/8/06 8:30	24.89	328.73	277.09	388.80	620.70	455.24	421.14	529.53	419.08	473.27		395.67
10/8/06 8:45	24.89	328.73	277.09	388.82	620.70	455.24	421.14	529.53	419.08	473.27		395.68
10/8/06 9:00	24.89	328.74	277.10	388.80	620.71	455.24	421.14	529.53	419.09	473.27		395.68
10/8/06 9:15	24.90	328.74	277.10	388.78	620.72	455.24	421.14	529.53	419.08	473.26		395.69
10/8/06 9:30	24.90	328.74	277.10	388.75	620.74	455.24	421.14	529.53	419.09	473.26		395.70
10/8/06 9:45	24.90	328.75	277.10	388.65	620.75	455.25	421.15	529.53	419.09	473.27		395.70
10/8/06 10:00	24.90	328.75	277.10	388.64	620.76	455.25	421.15	529.53	419.09	473.27		395.70
10/8/06 10:15	24.90	328.76	277.10	388.64	620.76	455.25	421.15	529.53	419.09	473.32		395.71
10/8/06 10:30	24.90	328.76	277.10	388.64	620.78	455.25	421.15	529.53	419.10	473.33		395.70
10/8/06 10:45	24.90	328.77	277.10	388.65	620.78	455.26	421.16	529.53	419.10	473.33		395.71
10/8/06 11:00	24.89	328.77	277.11	388.64	620.79	455.26	421.16	529.53	419.10	473.34		395.72
10/8/06 11:15	24.89	328.78	277.10	388.65	620.80	455.26	421.15	529.53	419.11	473.34		395.72
10/8/06 11:30	24.89	328.78	277.11	388.68	620.81	455.26	421.16	529.53	419.10	473.35		395.73
10/8/06 11:45	24.89	328.78	277.10	388.65	620.82	455.26	421.16	529.52	419.11	473.35		395.72
10/8/06 12:00	24.88	328.79	277.09	388.65	620.82	455.26	421.15	529.52	419.10	473.35		395.74
10/8/06 12:15	24.87	328.79	277.11	388.64	620.83	455.26	421.16	529.52	419.10	473.36		395.74
10/8/06 12:30	24.86	328.80	277.10	388.64	620.84	455.26	421.16	529.52	419.10	473.36		395.74
10/8/06 12:45	24.85	328.79	277.10	388.59	620.85	455.26	421.16	529.52	419.09	473.37		395.74
10/8/06 13:00	24.85	328.79	277.09	388.59	620.85	455.25	421.16	529.52	419.11	473.37		395.74
10/8/06 13:15	24.84	328.79	277.09	388.55	620.86	455.25	421.16	529.52	419.10	473.38		395.74
10/8/06 13:30	24.83	328.79	277.10	388.55	620.86	455.26	421.16	529.52	419.10	473.38		395.74
10/8/06 13:45	24.83	328.80	277.10	388.55	620.87	455.25	421.15	529.52	419.09	473.39		395.74
10/8/06 14:00	24.82	328.80	277.09	388.54	620.87	455.25	421.15	529.52	419.09	473.39		395.74
10/8/06 14:15	24.81	328.79	277.08	388.54	620.87	455.25	421.15	529.52	419.09	473.39		395.74
10/8/06 14:30	24.81	328.80	277.08	388.54	620.88	455.24	421.14	529.52	419.08	473.40		395.74
10/8/06 14:45	24.80	328.80	277.08	388.54	620.89	455.22	421.13	529.52	419.09	473.40		395.74
10/8/06 15:00	24.79	328.79	277.06	388.54	620.89	455.23	421.15	529.52	419.08	473.40		395.74
10/8/06 15:15	24.79	328.80	277.07	388.54	620.90	455.22	421.14	529.52	419.09	473.40		395.74
10/8/06 15:30	24.79	328.80	277.06	388.54	620.91	455.21	421.12	529.52	419.08	473.40		395.74
10/8/06 15:45	24.79	328.80	277.07	388.54	620.91	455.23	421.14	529.52	419.07	473.40		395.74
10/8/06 16:00	24.79	328.79	277.06	388.54	620.91	455.24	421.11	529.52	419.07	473.39		395.75
10/8/06 16:15	24.79	328.80	277.06	388.52	620.92	455.23	421.10	529.52	419.07	473.39		395.75
10/8/06 16:30	24.80	328.80	277.06	388.52	620.93	455.22	421.09	529.52	419.07	473.39		395.74
10/8/06 16:45	24.80	328.80	277.06	388.54	620.93	455.23	421.09	529.52	419.06	473.39		395.75
10/8/06 17:00	24.79	328.79	277.05	388.55	620.93	455.22	421.10	529.52	419.06	473.39		395.75
10/8/06 17:15	24.79	328.79	277.06	388.65	620.94	455.21	421.07	529.52	419.07	473.39		395.74
10/8/06 17:30	24.80	328.80	277.05	388.72	620.94	455.21	421.10	529.52	419.06	473.39		395.74
10/8/06 17:45	24.80	328.80	277.05	388.72	620.95	455.21	421.10	529.52	419.06	473.39		395.75
10/8/06 18:00	24.80	328.80	277.05	388.72	620.96	455.21	421.09	529.52	419.06	473.38		395.76
10/8/06 18:15	24.81	328.80	277.05	388.72	620.96	455.21	421.09	529.52	419.06	473.38		395.76
10/8/06 18:30	24.81	328.81	277.05	388.72	620.97	455.21	421.09	529.52	419.06	473.38		395.76
10/8/06 18:45	24.81	328.81	277.05	388.73	620.98	455.21	421.09	529.53	419.06	473.38		395.77
10/8/06 19:00	24.81	328.81	277.05	388.75	620.98	455.21	421.09	529.53	419.06	473.38		395.77
10/8/06 19:15	24.81	328.81	277.05	388.73	620.99	455.21	421.09	529.53	419.06	473.38		395.77
10/8/06 19:30	24.81	328.81	277.05	388.75	620.99	455.21	421.09	529.53	419.06	473.38		395.78
10/8/06 19:45	24.81	328.82	277.05	388.75	621.00	455.21	421.09	529.53	419.06	473.38		395.78
10/8/06 20:00	24.81	328.82	277.05	388.73	621.01	455.21	421.09	529.53	419.06	473.38		395.79
10/8/06 20:15	24.82	328.83	277.05	388.73	621.02	455.21	421.09	529.53	419.06	473.38		395.78
10/8/06 20:30	24.81	328.83	277.05	388.73	621.02	455.21	421.09	529.53	419.06	473.39		395.79
10/8/06 20:45	24.82	328.84	277.05	388.73	621.04	455.22	421.09	529.53	419.06	473.39		395.80
10/8/06 21:00	24.82	328.84	277.05	388.73	621.05	455.22	421.09	529.53	419.07	473.39		395.79
10/8/06 21:15	24.82	328.85	277.05	388.73	621.06	455.22	421.10	529.53	419.07	473.39		395.81
10/8/06 21:30	24.82	328.85	277.06	388.73	621.07	455.23	421.10	529.53	419.07	473.40		395.82
10/8/06 21:45	24.82	328.86	277.06	388.72	621.07	455.23	421.11	529.53	419.07	473.40		395.82
10/8/06 22:00	24.81	328.86	277.06	388.72	621.09	455.23	421.11	529.53	419.07	473.41		395.82
10/8/06 22:15	24.81	328.87	277.07	388.68	621.09	455.23	421.12	529.53	419.08	473.41		395.83
10/8/06 22:30	24.81	328.87	277.07	388.70	621.11	455.24	421.12	529.53	419.08	473.41		395.84
10/8/06 22:45	24.81	328.88	277.07	388.68	621.12	455.24	421.13	529.53	419.08	473.42		395.84
10/8/06 23:00	24.82	328.89	277.07	388.67	621.13	455.24	421.13	529.53	419.09	473.41		395.85
10/8/06 23:15	24.82	328.89	277.08	388.65	621.13	455.25	421.13	529.53	419.09	473.42		395.85
10/8/06 23:30	24.82	328.90	277.08	388.64	621.14	455.25	421.13	529.53	419.09	473.43		395.85
10/8/06 23:45	24.81	328.90	277.08	388.65	621.15	455.25	421.14	529.53	419.09	473.43		395.86
10/9/06 0:00	24.81	328.90	277.08	388.64	621.16	455.25	421.14	529.53	419.10	473.44		395.87
10/9/06 0:15	24.81	328.91	277.08	388.65	621.17	455.26	421.14	529.53	419.10	473.44		395.87
10/9/06 0:30	24.81	328.91	277.08	388.62	621.18	455.26	421.14	529.53	419.10	473.44		395.89
10/9/06 0:45	24.81	328.92	277.09	388.64	621.19	455.26	421.14	529.53	419.10	473.45		395.89
10/9/06 1:00	24.81	328.92	277.09	388.65	621.19	455.26	421.14	529.53	419.10	473.45		395.89
10/9/06 1:15	24.81	328.93	277.09	388.64	621.20	455.26	421.14	529.53	419.11	473.44		395.89
10/9/06 1:30	24.81	328.93	277.09	388.62	621.21	455.26	421.15	529.53	419.11	473.45		395.90
10/9/06 1:45	24.81	328.93	277.09	388.64	621.22	455.27	421.15	529.53	419.11	473.45		395.90
10/9/06 2:00	24.81	328.94	277.09	388.64	621.22	455.27	421.15	529.53	419.11	473.45		395.90
10/9/06 2:15	24.81	328.94	277.09	388.65	621.23	455.27	421.15	529.53	419.10	473.45		395.91
10/9/06 2:30	24.81	328.95	277.09	388.65	621.23	455.27	421.15	529.53	419.11	473.45		395.91
10/9/06 2:45	24.81	328.95	277.09	388.65	621.23	455.26	421.15	529.53	419.11	473.45		395.91
10/9/06 3:00	24.82	328.95	277.08	388.65	621.25	455.27	421.14	529.53	419.11	473.44		395.92
10/9/06 3:15	24.81	328.95	277.09	388.67	621.25	455.27	421.14	529.53	419.11	473.45		395.92
10/9/06 3:30	24.82	328.95	277.08	388.67	621.25	455.26	421.14	529.53	419.11	473.44		395.93
10/9/06 3:45	24.82	328.96	277.08	388.67	621.26	455.26	421.14	529.53	419.10	473.44		395.93
10/9/06 4:00	24.82	328.96	277.08	388.67	621.26	455.26	421.14	529.53	419.10	473.44		395.93

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
10/9/06 4:15	24.81	328.95	277.07	388.68	621.27	455.26	421.14	529.53	419.09	473.44		395.93
10/9/06 4:30	24.81	328.96	277.07	388.67	621.27	455.25	421.14	529.53	419.09	473.43		395.93
10/9/06 4:45	24.81	328.95	277.07	388.68	621.28	455.25	421.13	529.53	419.10	473.43		395.93
10/9/06 5:00	24.82	328.96	277.07	388.68	621.28	455.25	421.13	529.53	419.08	473.43		395.93
10/9/06 5:15	24.82	328.96	277.06	388.70	621.29	455.24	421.13	529.53	419.09	473.42		395.93
10/9/06 5:30	24.82	328.96	277.06	388.65	621.29	455.24	421.12	529.53	419.08	473.41		395.93
10/9/06 5:45	24.82	328.96	277.06	388.65	621.30	455.24	421.12	529.53	419.08	473.41		395.94
10/9/06 6:00	24.83	328.96	277.06	388.67	621.30	455.24	421.12	529.53	419.08	473.41		395.94
10/9/06 6:15	24.83	328.96	277.05	388.67	621.30	455.24	421.12	529.53	419.08	473.40		395.94
10/9/06 6:30	24.83	328.96	277.05	388.67	621.31	455.24	421.11	529.53	419.08	473.39		395.94
10/9/06 6:45	24.83	328.96	277.05	388.67	621.31	455.23	421.12	529.53	419.07	473.39		395.94
10/9/06 7:00	24.83	328.96	277.05	388.68	621.31	455.23	421.11	529.53	419.08	473.39		395.93
10/9/06 7:15	24.84	328.96	277.04	388.67	621.32	455.22	421.11	529.53	419.07	473.38		395.94
10/9/06 7:30	24.84	328.96	277.04	388.67	621.32	455.22	421.11	529.53	419.07	473.38		395.94
10/9/06 7:45	24.84	328.97	277.04	388.67	621.33	455.22	421.10	529.53	419.06	473.38		395.94
10/9/06 8:00	24.84	328.97	277.04	388.70	621.34	455.23	421.09	529.53	419.07	473.37		395.92
10/9/06 8:15	24.85	328.97	277.04	388.68	621.35	455.22	421.09	529.53	419.07	473.36		395.94
10/9/06 8:30	24.85	328.97	277.04	388.68	621.35	455.23	421.09	529.53	419.07	473.36		395.94
10/9/06 8:45	24.85	328.98	277.04	388.70	621.36	455.23	421.10	529.53	419.07	473.36		395.93
10/9/06 9:00	24.86	328.98	277.04	388.68	621.36	455.22	421.10	529.53	419.07	473.36		395.94
10/9/06 9:15	24.86	328.98	277.04	388.68	621.37	455.23	421.10	529.53	419.07	473.36		395.94
10/9/06 9:30	24.86	328.99	277.04	388.68	621.37	455.23	421.10	529.53	419.07	473.36		395.95
10/9/06 9:45	24.86	328.99	277.04	388.68	621.38	455.23	421.10	529.53	419.07	473.35		395.95
10/9/06 10:00	24.86	328.99	277.04	388.68	621.39	455.23	421.10	529.53	419.07	473.35		395.95
10/9/06 10:15	24.86	329.00	277.04	388.68	621.39	455.23	421.10	529.53	419.07	473.35		395.97
10/9/06 10:30	24.87	329.00	277.05	388.70	621.41	455.23	421.10	529.53	419.07	473.35		395.97
10/9/06 10:45	24.86	329.00	277.04	388.72	621.41	455.23	421.10	529.53	419.07	473.36		395.97
10/9/06 11:00	24.85	329.01	277.05	388.75	621.43	455.23	421.11	529.53	419.08	473.36		395.98
10/9/06 11:15	24.85	329.01	277.04	388.72	621.43	455.23	421.11	529.53	419.08	473.36		395.99
10/9/06 11:30	24.85	329.02	277.04	388.72	621.43	455.23	421.11	529.53	419.08	473.37		395.99
10/9/06 11:45	24.85	329.02	277.04	388.72	621.44	455.23	421.12	529.53	419.07	473.37		395.98
10/9/06 12:00	24.85	329.02	277.04	388.72	621.45	455.23	421.12	529.53	419.08	473.37		395.99
10/9/06 12:15	24.85	329.02	277.04	388.72	621.46	455.24	421.12	529.53	419.08	473.37		395.99
10/9/06 12:30	24.85	329.03	277.05	388.72	621.46	455.24	421.13	529.53	419.08	473.37		396.00
10/9/06 12:45	24.85	329.04	277.05	388.72	621.48	455.24	421.14	529.53	419.08	473.37		396.00
10/9/06 13:00	24.85	329.04	277.04	388.72	621.47	455.24	421.14	529.53	419.08	473.38		396.00
10/9/06 13:15	24.84	329.04	277.04	388.77	621.48	455.24	421.14	529.53	419.08	473.38		396.01
10/9/06 13:30	24.84	329.04	277.04	388.72	621.48	455.23	421.15	529.53	419.08	473.39		396.02
10/9/06 13:45	24.83	329.04	277.04	388.75	621.49	455.23	421.15	529.53	419.08	473.39		396.02
10/9/06 14:00	24.83	329.04	277.04	388.70	621.49	455.23	421.15	529.53	419.08	473.39		396.01
10/9/06 14:15	24.83	329.05	277.04	388.72	621.50	455.23	421.15	529.53	419.08	473.39		396.03
10/9/06 14:30	24.82	329.04	277.04	388.72	621.51	455.23	421.15	529.53	419.07	473.40		396.02
10/9/06 14:45	24.82	329.05	277.03	388.73	621.51	455.23	421.16	529.53	419.07	473.39		396.04
10/9/06 15:00	24.82	329.05	277.03	388.72	621.52	455.22	421.15	529.53	419.07	473.40		396.03
10/9/06 15:15	24.82	329.05	277.03	388.75	621.52	455.22	421.15	529.53	419.07	473.40		396.03
10/9/06 15:30	24.82	329.05	277.03	388.72	621.53	455.22	421.14	529.53	419.06	473.39		396.03
10/9/06 15:45	24.82	329.05	277.02	388.72	621.53	455.22	421.13	529.53	419.07	473.39		396.03
10/9/06 16:00	24.82	329.06	277.03	388.78	621.54	455.22	421.13	529.53	419.07	473.39		396.03
10/9/06 16:15	24.83	329.06	277.02	388.72	621.55	455.22	421.12	529.53	419.07	473.39		396.03
10/9/06 16:30	24.82	329.06	277.02	388.72	621.55	455.22	421.12	529.53	419.06	473.39		396.04
10/9/06 16:45	24.82	329.06	277.02	388.72	621.55	455.21	421.12	529.53	419.06	473.39		396.03
10/9/06 17:00	24.82	329.06	277.02	388.77	621.55	455.21	421.12	529.53	419.06	473.39		396.03
10/9/06 17:15	24.82	329.06	277.01	388.72	621.56	455.21	421.12	529.53	419.06	473.38		396.03
10/9/06 17:30	24.81	329.06	277.01	388.72	621.56	455.20	421.12	529.53	419.06	473.38		396.02
10/9/06 17:45	24.81	329.05	277.00	388.72	621.57	455.20	421.12	529.53	419.05	473.38		396.01
10/9/06 18:00	24.81	329.06	277.00	388.77	621.57	455.20	421.11	529.53	419.05	473.38		396.02
10/9/06 18:15	24.81	329.06	277.00	388.73	621.57	455.20	421.11	529.53	419.05	473.38		396.01
10/9/06 18:30	24.82	329.06	277.00	388.72	621.57	455.19	421.11	529.53	419.04	473.38		396.02
10/9/06 18:45	24.81	329.06	277.00	388.70	621.58	455.20	421.10	529.53	419.05	473.37		396.02
10/9/06 19:00	24.83	329.06	277.00	388.73	621.58	455.19	421.09	529.53	419.04	473.37		396.02
10/9/06 19:15	24.83	329.06	277.00	388.73	621.59	455.20	421.09	529.53	419.05	473.36		396.03
10/9/06 19:30	24.82	329.07	277.00	388.70	621.60	455.19	421.09	529.53	419.05	473.36		396.02
10/9/06 19:45	24.82	329.07	277.00	388.72	621.61	455.19	421.09	529.53	419.05	473.36		396.03
10/9/06 20:00	24.82	329.08	277.00	388.73	621.61	455.20	421.09	529.53	419.05	473.36		396.03
10/9/06 20:15	24.82	329.08	277.00	388.70	621.62	455.19	421.09	529.53	419.05	473.36		396.03
10/9/06 20:30	24.82	329.08	277.00	388.73	621.62	455.20	421.09	529.53	419.05	473.36		396.04
10/9/06 20:45	24.82	329.08	276.99	388.75	621.63	455.19	421.09	529.53	419.05	473.36		396.04
10/9/06 21:00	24.82	329.08	276.99	388.75	621.63	455.19	421.10	529.53	419.04	473.37		396.04
10/9/06 21:15	24.82	329.08	276.99	388.72	621.64	455.20	421.09	529.53	419.05	473.37		396.04
10/9/06 21:30	24.82	329.09	277.00	388.77	621.65	455.20	421.09	529.53	419.05	473.37		396.04
10/9/06 21:45	24.82	329.10	277.00	388.73	621.65	455.20	421.10	529.53	419.05	473.37		396.05
10/9/06 22:00	24.82	329.10	277.00	388.73	621.66	455.20	421.10	529.53	419.04	473.37		396.05
10/9/06 22:15	24.82	329.10	277.00	388.77	621.67	455.20	421.10	529.53	419.05	473.37		396.07
10/9/06 22:30	24.82	329.11	277.00	388.77	621.68	455.20	421.10	529.53	419.05	473.37		396.07
10/9/06 22:45	24.82	329.11	277.00	388.78	621.69	455.20	421.10	529.53	419.05	473.38		396.07
10/9/06 23:00	24.82	329.11	277.00	388.77	621.69	455.20	421.11	529.53	419.05	473.38		396.08
10/9/06 23:15	24.81	329.11	277.00	388.82	621.70	455.20	421.11	529.54	419.05	473.39		396.08
10/9/06 23:30	24.80	329.11	277.00	388.85	621.70	455.20	421.12	529.54	419.05	473.40		396.09
10/9/06 23:45	24.79	329.12	277.00	388.77	621.71	455.20	421.13	529.54	419.05	473.40		396.08
10/10/06 0:00	24.79	329.12	277.00	388.80	621.71	455.20	421.13	529.54	419.05	473.41		396.08
10/10/06 0:15	24.79	329.12	277.00	388.87	621.72	455.20	421.13	529.54	419.05	473.41		396.09
10/10/06 0:30	24.79	329.13	277.00	388.87	621.73	455.20	421.14	529.54	419.06	473.41		396.09
10/10/06 0:45	24.78	329.13	277.00	388.75	621.73	455.20	421.14	529.54	419.05	473.42		396.10
10/10/06 1:00	24.77	329.13	277.00	388.85	621.74	455.20	421.14	529.54	419.05	473.43		396.09
10/10/06 1:15	24.77	329.13	277.00	388.77	621.75	455.20	421.14	529.54	419.05	473.43		396.10
10/10/06 1:30	24.77	329.14	277.00	388.87	621.75	455.20	421.14	529.54	419.05	473.44		396.10
10/10/06 1:45	24.76	329.13	277.00	388.77	621.75	455.20	421.14	529.54	419.05	473.44		396.10
10/10/06 2:00	24.75	329.14	276.99	388.88	621.76	455.20	421.14	529.54	419.05	473.44		396.11
10/10/06 2:15	24.76	329.14	276.99	388.80	621.77	455.20	421.13	529.54	419.05	473.45		396.11
10/10/06 2:30	24.75	329.15	276.99	388.92	621.77	455.20	421.14	529.54	419.05	473.45		396.11
10/10/06 2:45	24.74	329.15	276.99	388.77	621.77	455.20	421.13	529.53	419.05	473.46		396.11
10/10/06 3:00	24.73	329.15	276.98	388.82	621.77	455.19	421.13	529.53	419.04	473.46		396.12
10/10/06 3:15	24.73	329.14	276.98	388.90	621.78	455.19	421.12	529.53	419.04	473.47		396.11
10/10/06 3:30	24.72	329.14	276.98	388.82	621.78	455.18	421.12	529.53	419.04	473.47		396.10
10/10/06 3:45	24.71	329.14	276.97	388.77	621.78	455.18	421.12	529.53	419.03	473.48		396.11
10/10/06 4:00	24.71	329.14	276.96	388.73	621.78	455.17	421.11	529.53	419.03	473.48		396.11
10/10/06 4:15	24.70	329.13	276.96	388.82	621.78	455.17	421.11	529.53	419.02	473.48		396.11
10/10/06 4:30	24.70	329.13	276.96	388.78	621.78	455.16	421.10	529.53	419.02	473.48		396.11
10/10/06 4:45	24.69	329.13	276.95	388.82	621.79	455.16	421.09	529.53	419.02	473.48		396.10
10/10/06 5:00	24.69	329.13	276.95	388.85	621.79	455.16	421.09	529.53	419.01	473.48		396.10

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
10/10/06 5:15	24.68	329.13	276.95	388.85	621.79	455.15	421.09	529.53	419.01	473.48		396.11
10/10/06 5:30	24.68	329.13	276.94	388.83	621.79	455.15	421.09	529.53	419.00	473.48		396.10
10/10/06 5:45	24.69	329.13	276.93	388.83	621.80	455.14	421.08	529.53	419.00	473.47		396.10
10/10/06 6:00	24.69	329.13	276.93	388.90	621.80	455.14	421.07	529.53	419.00	473.47		396.10
10/10/06 6:15	24.69	329.13	276.93	388.87	621.81	455.14	421.07	529.53	419.00	473.46		396.11
10/10/06 6:30	24.68	329.13	276.93	388.87	621.81	455.14	421.07	529.53	419.00	473.46		396.11
10/10/06 6:45	24.68	329.13	276.93	388.83	621.82	455.13	421.06	529.53	418.99	473.46		396.11
10/10/06 7:00	24.69	329.13	276.92	388.83	621.82	455.13	421.06	529.53	418.99	473.46		396.12
10/10/06 7:15	24.68	329.13	276.92	388.78	621.82	455.13	421.06	529.53	418.99	473.45		396.12
10/10/06 7:30	24.68	329.13	276.92	388.82	621.82	455.13	421.06	529.53	418.99	473.45		396.12
10/10/06 7:45	24.68	329.13	276.91	388.77	621.83	455.12	421.06	529.53	418.98	473.45		396.12
10/10/06 8:00	24.67	329.13	276.91	388.77	621.83	455.12	421.05	529.53	418.98	473.46		396.11
10/10/06 8:15	24.67	329.13	276.90	388.75	621.83	455.11	421.05	529.53	418.98	473.45		396.11
10/10/06 8:30	24.67	329.13	276.90	388.72	621.84	455.11	421.04	529.53	418.98	473.45		396.12
10/10/06 8:45	24.66	329.13	276.90	388.72	621.84	455.11	421.05	529.53	418.97	473.45		396.13
10/10/06 9:00	24.66	329.13	276.89	388.75	621.84	455.11	421.04	529.53	418.97	473.45		396.13
10/10/06 9:15	24.66	329.13	276.89	389.08	621.84	455.10	421.04	529.53	418.97	473.45		396.13
10/10/06 9:30	24.65	329.13	276.89	389.08	621.85	455.10	421.04	529.53	418.97	473.46		396.13
10/10/06 9:45	24.64	329.13	276.89	389.08	621.85	455.10	421.04	529.53	418.96	473.46		396.13
10/10/06 10:00	24.64	329.13	276.88	389.08	621.85	455.09	421.04	529.53	418.96	473.46		396.13
10/10/06 10:15	24.64	329.13	276.88	389.08	621.86	455.09	421.04	529.53	418.96	473.46		396.13
10/10/06 10:30	24.63	329.13	276.87	389.05	621.86	455.09	421.05	529.53	418.96	473.47		396.13
10/10/06 10:45	24.63	329.13	276.87	389.06	621.87	455.09	421.05	529.53	418.96	473.46		396.13
10/10/06 11:00	24.63	329.13	276.87	389.06	621.87	455.09	421.04	529.53	418.96	473.46		396.13
10/10/06 11:15	24.63	329.14	276.87	389.06	621.88	455.09	421.05	529.53	418.96	473.46		396.13
10/10/06 11:30	24.63	329.14	276.86	388.98	621.88	455.09	421.04	529.53	418.96	473.46		396.13
10/10/06 11:45	24.63	329.15	276.86	388.95	621.89	455.09	421.04	529.53	418.96	473.47		396.14
10/10/06 12:00	24.63	329.15	276.87	388.98	621.89	455.08	421.03	529.53	418.96	473.47		396.15
10/10/06 12:15	24.62	329.15	276.86	388.97	621.89	455.09	421.05	529.53	418.96	473.47		396.14
10/10/06 12:30	24.61	329.14	276.85	388.95	621.89	455.09	421.04	529.53	418.95	473.48		396.15
10/10/06 12:45	24.60	329.15	276.86	388.92	621.89	455.08	421.03	529.53	418.95	473.48		396.14
10/10/06 13:00	24.60	329.15	276.86	388.90	621.90	455.08	421.02	529.53	418.94	473.48		396.14
10/10/06 13:15	24.60	329.15	276.84	388.87	621.91	455.08	421.03	529.53	418.95	473.48		396.14
10/10/06 13:30	24.60	329.15	276.85	388.80	621.91	455.08	421.02	529.53	418.95	473.48		396.15
10/10/06 13:45	24.60	329.15	276.85	388.78	621.91	455.08	421.03	529.53	418.94	473.49		396.15
10/10/06 14:00	24.59	329.16	276.86	388.77	621.93	455.09	421.04	431.63	418.95	473.48		396.15
10/10/06 14:15	24.59	329.16	276.85	388.75	621.93	455.09	421.03	431.60	418.95	473.49		396.16
10/10/06 14:30	24.59	329.16	276.85	388.72	621.93	455.09	421.03	431.59	418.95	473.49		396.16
10/10/06 14:45	24.59	329.17	276.85	388.77	621.94	455.09	421.03	431.58	418.94	473.49		396.17
10/10/06 15:00	24.59	329.17	276.85	388.82	621.95	455.09	421.03	431.58	418.94	473.49		396.17
10/10/06 15:15	24.58	329.17	276.85	388.83	621.95	455.09	421.02	431.57	418.95	473.49		396.18
10/10/06 15:30	24.58	329.17	276.85	388.83	621.95	455.09	421.02	431.57	418.94	473.49		396.17
10/10/06 15:45	24.58	329.17	276.85	388.85	621.96	455.08	421.02	431.57	418.94	473.48		396.18
10/10/06 16:00	24.57	329.17	276.85	388.78	621.96	455.08	421.02	431.57	418.94	473.49		396.18
10/10/06 16:15	24.56	329.17	276.84	388.82	621.97	455.08	421.01	431.55	418.93	473.47		396.18
10/10/06 16:30	24.56	329.17	276.83	388.77	621.98	455.07	421.01	431.55	418.93	473.45		396.18
10/10/06 16:45	24.57	329.17	276.84	388.75	621.98	455.07	421.02	431.55	418.93	473.45		396.18
10/10/06 17:00	24.56	329.17	276.83	388.77	621.98	455.07	421.02	431.55	418.93	473.45		396.18
10/10/06 17:15	24.57	329.17	276.84	388.78	621.98	455.07	421.00	431.55	418.93	473.44		396.18
10/10/06 17:30	24.57	329.18	276.84	388.73	621.98	455.07	421.00	431.54	418.93	473.44		396.18
10/10/06 17:45	24.56	329.18	276.83	388.72	621.99	455.07	421.00	431.54	418.93	473.45		396.19
10/10/06 18:00	24.56	329.18	276.83	388.72	621.99	455.06	420.98	431.53	418.92	473.45		396.19
10/10/06 18:15	24.56	329.18	276.83	388.73	622.00	455.07	420.98	431.52	418.92	473.44		396.18
10/10/06 18:30	24.56	329.18	276.83	388.73	622.00	455.07	420.97	431.53	418.92	473.44		396.19
10/10/06 18:45	24.57	329.18	276.83	388.73	622.01	455.07	420.97	431.52	418.92	473.44		396.19
10/10/06 19:00	24.56	329.18	276.82	388.73	622.01	455.06	420.97	431.52	418.92	473.45		396.19
10/10/06 19:15	24.55	329.18	276.83	388.72	622.01	455.06	420.97	431.52	418.92	473.45		396.20
10/10/06 19:30	24.56	329.18	276.83	388.72	622.01	455.06	420.97	431.52	418.92	473.45		396.20
10/10/06 19:45	24.56	329.19	276.83	388.73	622.02	455.06	420.96	431.52	418.92	473.45		396.21
10/10/06 20:00	24.55	329.19	276.83	388.73	622.03	455.06	420.97	431.51	418.92	473.45		396.21
10/10/06 20:15	24.55	329.20	276.83	388.80	622.03	455.06	420.97	431.51	418.92	473.45		396.21
10/10/06 20:30	24.55	329.19	276.82	388.73	622.04	455.06	420.97	431.51	418.92	473.45		396.22
10/10/06 20:45	24.55	329.20	276.82	388.75	622.04	455.06	420.97	431.51	418.92	473.46		396.21
10/10/06 21:00	24.55	329.20	276.83	388.75	622.05	455.06	420.97	431.51	418.92	473.46		396.22
10/10/06 21:15	24.55	329.20	276.83	388.73	622.05	455.06	420.98	431.51	418.92	473.46		396.22
10/10/06 21:30	24.55	329.20	276.82	388.73	622.06	455.06	420.98	431.51	418.92	473.46		396.23
10/10/06 21:45	24.55	329.21	276.83	388.75	622.07	455.06	420.99	431.51	418.92	473.46		396.22
10/10/06 22:00	24.54	329.22	276.83	388.77	622.07	455.07	420.99	431.52	418.92	473.47		396.23
10/10/06 22:15	24.54	329.22	276.82	388.83	622.07	455.06	421.00	431.51	418.92	473.47		396.24
10/10/06 22:30	24.53	329.22	276.82	388.75	622.08	455.06	421.00	431.51	418.92	473.48		396.23
10/10/06 22:45	24.53	329.22	276.82	388.77	622.09	455.06	421.01	431.50	418.92	473.48		396.24
10/10/06 23:00	24.52	329.22	276.83	388.75	622.09	455.06	421.01	431.50	418.92	473.49		396.24
10/10/06 23:15	24.52	329.23	276.82	388.75	622.10	455.06	421.01	431.50	418.92	473.49		396.24
10/10/06 23:30	24.52	329.23	276.83	388.82	622.10	455.07	421.01	431.50	418.93	473.43		396.25
10/10/06 23:45	24.52	329.23	276.83	388.77	622.11	455.07	421.01	431.51	418.93	473.41		396.25
10/11/06 0:00	24.52	329.24	276.83	388.77	622.12	455.07	421.01	431.51	418.93	473.42		396.25
10/11/06 0:15	24.53	329.25	276.83	388.77	622.12	455.07	421.01	431.51	418.94	473.42		396.27
10/11/06 0:30	24.53	329.26	276.84	388.77	622.13	455.08	421.01	431.51	418.93	473.42		396.27
10/11/06 0:45	24.53	329.26	276.84	388.77	622.14	455.08	421.01	431.52	418.94	473.42		396.28
10/11/06 1:00	24.53	329.27	276.85	388.78	622.14	455.09	421.02	431.52	418.94	473.42		396.28
10/11/06 1:15	24.53	329.27	276.84	388.82	622.15	455.09	421.03	431.52	418.94	473.43		396.29
10/11/06 1:30	24.52	329.27	276.84	388.80	622.16	455.09	421.03	431.52	418.94	473.43		396.28
10/11/06 1:45	24.52	329.28	276.84	388.80	622.17	455.09	421.03	431.52	418.95	473.43		396.29
10/11/06 2:00	24.52	329.28	276.85	388.78	622.17	455.09	421.03	431.52	418.95	473.44		396.30
10/11/06 2:15	24.52	329.28	276.84	388.78	622.17	455.09	421.03	431.52	418.95	473.44		396.30
10/11/06 2:30	24.51	329.28	276.84	388.78	622.18	455.09	421.03	431.52	418.95	473.44		396.30
10/11/06 2:45	24.50	329.28	276.84	388.82	622.17	455.08	421.03	431.51	418.96	473.46		396.31
10/11/06 3:00	24.51	329.29	276.84	388.80	622.19	455.08	421.03	431.52	418.95	473.45		396.30
10/11/06 3:15	24.51	329.29	276.83	388.80	622.19	455.08	421.03	431.51	418.96	473.44		396.31
10/11/06 3:30	24.51	329.29	276.83	388.80	622.20	455.09	421.03	431.51	418.95	473.45		396.31
10/11/06 3:45	24.51	329.29	276.83	388.80	622.21	455.09	421.03	431.52	418.95	473.45		396.32
10/11/06 4:00	24.50	329.29	276.83	388.80	622.20	455.08	421.03	431.51	418.95	473.46		396.31
10/11/06 4:15	24.50	329.29	276.84	388.80	622.21	455.08	421.02	431.50	418.95	473.46		396.31
10/11/06 4:30	24.50	329.30	276.84	388.80	622.21	455.09	421.03	431.51	418.95	473.46		396.33
10/11/06 4:45	24.51	329.31	276.83	388.80	622.21	455.09	421.02	431.51	418.94	473.45		396.33
10/11/06 5:00	24.52	329.31	276.84	388.80	622.23	455.09	421.01	431.51	418.95	473.44		396.33
10/11/06 5:15	24.52	329.31	276.84	388.82	622.23	455.09	421.01	431.51	418.95	473.44		396.33
10/11/06 5:30	24.52	329.31	276.84	388.82	622.23	455.09	421.01	431.51	418.95	473.44		396.34
10/11/06 5:45	24.52	329.32	276.84	388.80	622.24	455.09	421.00	431.51	418.95	473.43		396.34
10/11/06 6:00	24.53	329.32	276.84	388.90	622.24	455.09	421.00	431.52	418.94	473.43		396.34

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
10/11/06 6:15	24.54	329.32	276.84	388.82	622.25	455.09	421.00	431.51	418.95	473.42		396.34
10/11/06 6:30	24.55	329.33	276.84	388.82	622.25	455.09	420.97	431.51	418.95	473.41		396.34
10/11/06 6:45	24.56	329.33	276.85	388.83	622.26	455.09	420.97	431.51	418.95	473.40		396.35
10/11/06 7:00	24.57	329.34	276.85	388.82	622.26	455.10	420.97	431.52	418.95	473.39		396.36
10/11/06 7:15	24.58	329.34	276.85	388.87	622.27	455.10	420.96	431.51	418.95	473.39		396.36
10/11/06 7:30	24.58	329.34	276.84	388.82	622.27	455.10	420.97	431.51	418.96	473.38		396.37
10/11/06 7:45	24.59	329.35	276.85	388.88	622.28	455.09	420.97	431.50	418.96	473.38		396.37
10/11/06 8:00	24.58	329.35	276.85	388.82	622.29	455.09	420.96	431.50	418.95	473.37		396.36
10/11/06 8:15	24.60	329.35	276.85	388.88	622.29	455.09	420.96	431.50	418.95	473.36		396.36
10/11/06 8:30	24.60	329.35	276.85	388.83	622.29	455.10	420.96	431.51	418.96	473.36		396.36
10/11/06 8:45	24.61	329.36	276.85	388.90	622.30	455.10	420.96	431.51	418.96	473.35		396.37
10/11/06 9:00	24.60	329.36	276.85	388.82	622.30	455.10	420.97	431.50	418.95	473.36		396.38
10/11/06 9:15	24.59	329.36	276.85	388.92	622.31	455.09	420.97	431.50	418.95	473.36		396.38
10/11/06 9:30	24.60	329.36	276.84	388.88	622.31	455.09	420.97	431.50	418.95	473.36		396.38
10/11/06 9:45	24.59	329.36	276.85	388.97	622.32	455.09	420.97	431.50	418.95	473.35		396.37
10/11/06 10:00	24.60	329.36	276.84	388.88	622.32	455.09	420.97	431.50	418.95	473.35		396.38
10/11/06 10:15	24.60	329.36	276.83	388.97	622.32	455.09	420.98	431.50	418.95	473.35		396.38
10/11/06 10:30	24.59	329.36	276.83	388.97	622.32	455.08	420.97	431.49	418.95	473.35		396.38
10/11/06 10:45	24.59	329.37	276.83	388.95	622.33	455.09	420.98	431.49	418.95	473.35		396.39
10/11/06 11:00	24.59	329.37	276.83	388.98	622.33	455.08	420.99	431.49	418.94	473.35		396.40
10/11/06 11:15	24.59	329.37	276.83	388.87	622.34	455.09	420.99	431.49	418.95	473.35		396.39
10/11/06 11:30	24.58	329.37	276.83	388.92	622.34	455.08	421.01	431.50	418.95	473.36		396.40
10/11/06 11:45	24.57	329.36	276.82	388.95	622.34	455.07	421.01	431.48	418.94	473.36		396.40
10/11/06 12:00	24.57	329.37	276.82	389.06	622.35	455.08	421.00	431.48	418.94	473.36		396.39
10/11/06 12:15	24.56	329.37	276.82	389.03	622.35	455.07	421.01	431.47	418.93	473.37		396.40
10/11/06 12:30	24.55	329.37	276.82	388.98	622.35	455.07	421.01	431.47	418.94	473.37		396.39
10/11/06 12:45	24.54	329.37	276.81	388.97	622.35	455.07	421.01	431.47	418.94	473.38		396.40
10/11/06 13:00	24.54	329.37	276.81	388.95	622.36	455.07	421.00	431.47	418.93	473.38		396.39
10/11/06 13:15	24.52	329.36	276.80	388.95	622.35	455.06	421.01	431.46	418.92	473.39		396.40
10/11/06 13:30	24.52	329.36	276.80	388.92	622.35	455.06	420.99	431.45	418.92	473.39		396.39
10/11/06 13:45	24.52	329.37	276.80	388.93	622.36	455.05	420.99	431.45	418.92	473.40		396.39
10/11/06 14:00	24.51	329.37	276.79	388.95	622.37	455.05	421.00	431.45	418.92	473.40		396.39
10/11/06 14:15	24.51	329.37	276.79	388.97	622.37	455.06	421.00	431.44	418.92	473.40		396.39
10/11/06 14:30	24.50	329.37	276.79	388.97	622.37	455.05	420.99	431.44	418.92	473.41		396.39
10/11/06 14:45	24.49	329.37	276.79	389.02	622.37	455.05	420.99	431.44	418.92	473.41		396.39
10/11/06 15:00	24.50	329.37	276.78	389.00	622.37	455.04	420.99	431.44	418.93	473.41		396.38
10/11/06 15:15	24.49	329.36	276.77	389.02	622.37	455.04	420.99	431.44	418.92	473.42		396.39
10/11/06 15:30	24.49	329.38	276.78	389.00	622.37	455.04	420.97	431.44	418.91	473.41		396.38
10/11/06 15:45	24.49	329.38	276.78	389.02	622.39	455.04	420.98	431.44	418.93	473.41		396.40
10/11/06 16:00	24.49	329.38	276.78	389.00	622.39	455.05	420.99	431.44	418.91	473.41		396.39
10/11/06 16:15	24.49	329.38	276.77	388.98	622.39	455.04	420.98	431.44	418.92	473.41		396.41
10/11/06 16:30	24.49	329.39	276.78	388.98	622.39	455.05	420.97	431.44	418.92	473.41		396.40
10/11/06 16:45	24.49	329.39	276.78	388.98	622.40	455.04	420.97	431.44	418.92	473.40		396.41
10/11/06 17:00	24.48	329.39	276.77	388.98	622.41	455.04	420.98	431.43	418.92	473.41		396.41
10/11/06 17:15	24.49	329.39	276.78	388.97	622.41	455.04	420.98	431.43	418.92	473.41		396.42
10/11/06 17:30	24.49	329.39	276.78	388.97	622.42	455.04	420.97	431.43	418.91	473.41		396.41
10/11/06 17:45	24.50	329.39	276.77	388.97	622.42	455.04	420.97	431.43	418.92	473.40		396.43
10/11/06 18:00	24.50	329.40	276.78	388.98	622.43	455.04	420.96	431.43	418.92	473.40		396.42
10/11/06 18:15	24.51	329.40	276.78	388.98	622.43	455.04	420.95	431.44	418.91	473.39		396.43
10/11/06 18:30	24.52	329.40	276.77	389.00	622.43	455.05	420.91	431.44	418.91	473.38		396.43
10/11/06 18:45	24.53	329.41	276.79	389.00	622.44	455.05	420.92	431.44	418.92	473.39		396.44
10/11/06 19:00	24.53	329.41	276.79	388.98	622.44	455.05	420.93	431.44	418.92	473.39		396.44
10/11/06 19:15	24.53	329.42	276.79	388.98	622.46	455.04	420.93	431.44	418.92	473.38		396.45
10/11/06 19:30	24.54	329.43	276.80	388.98	622.45	455.05	420.93	431.44	418.93	473.38		396.46
10/11/06 19:45	24.55	329.44	276.80	388.98	622.46	455.06	420.93	431.44	418.92	473.37		396.46
10/11/06 20:00	24.56	329.44	276.81	389.00	622.47	455.06	420.92	431.45	418.92	473.37		396.47
10/11/06 20:15	24.57	329.45	276.80	388.98	622.47	455.07	420.94	431.45	418.93	473.36		396.47
10/11/06 20:30	24.59	329.45	276.81	389.00	622.48	455.07	420.93	431.45	418.93	473.36		396.48
10/11/06 20:45	24.60	329.46	276.81	388.98	622.48	455.06	420.95	431.45	418.93	473.35		396.49
10/11/06 21:00	24.59	329.47	276.81	388.98	622.50	455.08	420.95	431.46	418.94	473.35		396.49
10/11/06 21:15	24.60	329.47	276.83	388.95	622.50	455.08	420.94	431.46	418.95	473.34		396.49
10/11/06 21:30	24.60	329.47	276.83	388.93	622.52	455.08	420.95	431.47	418.96	473.34		396.50
10/11/06 21:45	24.61	329.48	276.83	388.92	622.52	455.09	420.94	431.47	418.95	473.34		396.51
10/11/06 22:00	24.61	329.49	276.84	388.90	622.53	455.09	420.94	431.47	418.95	473.34		396.50
10/11/06 22:15	24.61	329.49	276.84	388.90	622.54	455.09	420.95	431.47	418.96	473.33		396.51
10/11/06 22:30	24.61	329.51	276.84	388.92	622.53	455.10	420.95	431.47	418.96	473.35		396.52
10/11/06 22:45	24.63	329.51	276.84	388.95	622.54	455.08	420.93	431.47	418.95	473.34		396.52
10/11/06 23:00	24.62	329.51	276.84	388.92	622.55	455.09	420.98	431.47	418.97	473.34		396.52
10/11/06 23:15	24.63	329.51	276.84	389.00	622.57	455.10	420.97	431.48	418.97	473.33		396.52
10/11/06 23:30	24.62	329.53	276.85	389.00	622.57	455.10	420.99	431.48	418.98	473.34		396.53
10/11/06 23:45	24.63	329.52	276.85	388.95	622.56	455.11	420.98	431.50	418.97	473.34		396.53
10/12/06 0:00	24.62	329.53	276.85	389.00	622.58	455.11	420.99	431.49	418.97	473.34		396.54
10/12/06 0:15	24.63	329.53	276.85	388.93	622.59	455.11	420.98	431.49	418.98	473.34		396.54
10/12/06 0:30	24.64	329.52	276.86	388.98	622.61	455.12	420.98	431.50	418.98	473.34		396.54
10/12/06 0:45	24.64	329.53	276.87	388.92	622.63	455.13	420.99	431.51	419.00	473.34		396.54
10/12/06 1:00	24.63	329.54	276.86	388.92	622.63	455.13	421.01	431.51	419.00	473.34		396.56
10/12/06 1:15	24.64	329.55	276.86	388.95	622.64	455.13	421.00	431.50	418.99	473.34		396.56
10/12/06 1:30	24.62	329.55	276.86	388.90	622.63	455.13	421.03	431.50	418.99	473.36		396.57
10/12/06 1:45	24.62	329.55	276.85	388.92	622.64	455.13	421.03	431.50	418.99	473.36		396.57
10/12/06 2:00	24.62	329.55	276.86	388.88	622.65	455.13	421.03	431.50	418.99	473.36		396.57
10/12/06 2:15	24.61	329.56	276.86	388.97	622.65	455.13	421.03	431.50	418.99	473.37		396.57
10/12/06 2:30	24.62	329.56	276.86	388.90	622.66	455.13	421.04	431.51	418.99	473.37		396.58
10/12/06 2:45	24.61	329.56	276.86	388.90	622.66	455.13	421.04	431.50	419.00	473.38		396.59
10/12/06 3:00	24.60	329.56	276.86	388.90	622.66	455.13	421.05	431.50	418.99	473.38		396.59
10/12/06 3:15	24.59	329.56	276.85	388.95	622.67	455.13	421.06	431.50	418.99	473.39		396.59
10/12/06 3:30	24.59	329.56	276.85	388.97	622.67	455.12	421.05	431.50	418.99	473.39		396.58
10/12/06 3:45	24.59	329.56	276.85	388.95	622.67	455.12	421.06	431.50	418.99	473.39		396.59
10/12/06 4:00	24.58	329.56	276.85	389.00	622.67	455.12	421.06	431.50	418.99	473.40		396.59
10/12/06 4:15	24.58	329.57	276.85	388.93	622.68	455.12	421.05	431.50	418.99	473.39		396.59
10/12/06 4:30	24.58	329.57	276.85	389.02	622.68	455.12	421.05	431.50	418.98	473.40		396.60
10/12/06 4:45	24.57	329.57	276.85	388.93	622.69	455.12	421.05	431.50	418.98	473.40		396.59
10/12/06 5:00	24.57	329.57	276.84	389.00	622.69	455.12	421.05	431.48	418.98	473.40		396.60
10/12/06 5:15	24.56	329.57	276.84	388.97	622.69	455.11	421.05	431.47	418.98	473.40		396.61
10/12/06 5:30	24.56	329.57	276.84	388.95	622.69	455.11	421.05	431.47	418.98	473.40		396.60
10/12/06 5:45	24.56	329.57	276.84	388.97	622.69	455.11	421.05	431.47	418.98	473.41		396.61
10/12/06 6:00	24.56	329.58	276.83	388.98	622.70	455.11	421.05	431.47	418.98	473.40		396.62
10/12/06 6:15	24.56	329.57	276.83	388.97	622.70	455.11	421.04	431.47	418.98	473.40		396.62
10/12/06 6:30	24.56	329.58	276.83	388.98	622.71	455.11	421.04	431.47	418.98	473.40		396.61
10/12/06 6:45	24.55	329.58	276.83	388.95	622.71	455.11	421.04	431.47	418.98	473.40		396.62
10/12/06 7:00	24.55	329.57	276.82	388.97	622.71	455.10	421.04	431.47	418.97	473.40		396.62

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
10/12/06 7:15	24.55	329.57	276.82	388.95	622.71	455.10	421.04	431.47	418.97	473.40		396.62
10/12/06 7:30	24.56	329.58	276.82	388.98	622.71	455.10	421.04	431.47	418.97	473.40		396.62
10/12/06 7:45	24.55	329.58	276.82	388.93	622.71	455.10	421.04	431.46	418.97	473.40		396.62
10/12/06 8:00	24.54	329.58	276.81	388.98	622.72	455.10	421.03	431.45	418.97	473.40		396.62
10/12/06 8:15	24.55	329.58	276.81	388.98	622.72	455.10	421.03	431.46	418.97	473.40		396.62
10/12/06 8:30	24.55	329.58	276.81	388.95	622.72	455.10	421.02	431.46	418.97	473.39		396.62
10/12/06 8:45	24.56	329.59	276.81	388.95	622.73	455.10	421.03	431.46	418.96	473.39		396.62
10/12/06 9:00	24.56	329.58	276.81	389.00	622.73	455.10	421.03	431.46	418.97	473.38		396.62
10/12/06 9:15	24.56	329.58	276.81	388.95	622.73	455.10	421.01	431.45	418.96	473.38		396.63
10/12/06 9:30	24.56	329.59	276.81	389.00	622.74	455.09	421.01	431.45	418.97	473.37		396.63
10/12/06 9:45	24.56	329.59	276.81	388.95	622.75	455.09	421.02	431.45	418.96	473.37		396.63
10/12/06 10:00	24.56	329.60	276.81	389.03	622.75	455.10	421.03	431.46	418.97	473.37		396.64
10/12/06 10:15	24.56	329.60	276.81	388.97	622.76	455.10	421.03	431.46	418.96	473.37		396.63
10/12/06 10:30	24.56	329.60	276.81	388.95	622.76	455.09	421.01	431.45	418.96	473.37		396.63
10/12/06 10:45	24.56	329.60	276.81	389.00	622.76	455.10	421.02	431.46	418.96	473.37		396.63
10/12/06 11:00	24.55	329.60	276.81	388.95	622.77	455.10	421.02	431.46	418.96	473.37		396.64
10/12/06 11:15	24.55	329.60	276.81	388.98	622.77	455.09	421.02	431.46	418.96	473.37		396.64
10/12/06 11:30	24.55	329.60	276.79	388.97	622.77	455.08	421.01	431.44	418.95	473.37		396.64
10/12/06 11:45	24.54	329.61	276.80	389.00	622.77	455.09	421.02	431.45	418.96	473.36		396.64
10/12/06 12:00	24.53	329.61	276.80	388.95	622.77	455.09	421.02	431.44	418.95	473.37		396.64
10/12/06 12:15	24.53	329.60	276.79	389.00	622.78	455.08	421.02	431.44	418.95	473.37		396.63
10/12/06 12:30	24.52	329.61	276.79	388.95	622.79	455.09	421.02	431.44	418.95	473.37		396.65
10/12/06 12:45	24.52	329.60	276.79	389.00	622.78	455.08	421.02	431.44	418.94	473.37		396.64
10/12/06 13:00	24.51	329.61	276.79	388.95	622.79	455.08	421.02	431.44	418.95	473.37		396.65
10/12/06 13:15	24.51	329.61	276.79	388.98	622.79	455.08	421.02	431.43	418.94	473.38		396.65
10/12/06 13:30	24.50	329.61	276.78	388.95	622.79	455.08	421.01	431.43	418.95	473.38		396.64
10/12/06 13:45	24.50	329.61	276.78	388.98	622.79	455.07	421.01	431.43	418.94	473.38		396.65
10/12/06 14:00	24.50	329.61	276.77	388.95	622.79	455.07	421.01	431.42	418.94	473.38		396.65
10/12/06 14:15	24.50	329.61	276.78	388.98	622.80	455.08	421.01	431.43	418.94	473.38		396.65
10/12/06 14:30	24.49	329.60	276.77	388.97	622.80	455.07	421.01	431.43	418.94	473.38		396.65
10/12/06 14:45	24.49	329.61	276.77	388.98	622.80	455.06	420.99	431.42	418.93	473.38		396.65
10/12/06 15:00	24.49	329.62	276.78	388.97	622.81	455.07	421.00	431.42	418.94	473.38		396.65
10/12/06 15:15	24.49	329.62	276.77	389.00	622.81	455.07	421.00	431.42	418.94	473.38		396.65
10/12/06 15:30	24.49	329.62	276.77	388.95	622.82	455.06	421.00	431.42	418.93	473.39		396.66
10/12/06 15:45	24.49	329.62	276.77	389.00	622.82	455.07	420.99	431.42	418.94	473.39		396.65
10/12/06 16:00	24.49	329.62	276.77	388.95	622.82	455.06	420.99	431.42	418.94	473.39		396.67
10/12/06 16:15	24.49	329.62	276.77	389.00	622.82	455.06	420.98	431.42	418.93	473.38		396.66
10/12/06 16:30	24.49	329.63	276.77	388.97	622.83	455.07	420.97	431.42	418.94	473.38		396.67
10/12/06 16:45	24.49	329.63	276.77	389.00	622.84	455.06	420.97	431.42	418.93	473.38		396.67
10/12/06 17:00	24.50	329.62	276.77	388.97	622.83	455.06	420.96	431.42	418.93	473.38		396.67
10/12/06 17:15	24.50	329.63	276.77	389.00	622.85	455.06	420.96	431.42	418.93	473.39		396.67
10/12/06 17:30	24.50	329.63	276.77	388.98	622.85	455.06	420.95	431.41	418.93	473.38		396.67
10/12/06 17:45	24.50	329.63	276.77	389.00	622.85	455.06	420.94	431.41	418.93	473.38		396.67
10/12/06 18:00	24.50	329.62	276.77	388.98	622.85	455.06	420.93	431.41	418.93	473.38		396.68
10/12/06 18:15	24.51	329.63	276.76	389.00	622.86	455.06	420.93	431.41	418.93	473.38		396.68
10/12/06 18:30	24.51	329.64	276.77	389.00	622.86	455.06	420.93	431.41	418.93	473.38		396.68
10/12/06 18:45	24.51	329.64	276.77	389.02	622.87	455.06	420.93	431.41	418.93	473.38		396.68
10/12/06 19:00	24.52	329.64	276.77	389.00	622.87	455.06	420.94	431.41	418.93	473.38		396.69
10/12/06 19:15	24.53	329.64	276.77	389.00	622.88	455.06	420.94	431.42	418.94	473.37		396.70
10/12/06 19:30	24.53	329.65	276.77	389.00	622.88	455.07	420.94	431.42	418.94	473.37		396.70
10/12/06 19:45	24.53	329.66	276.78	389.00	622.89	455.07	420.94	431.42	418.94	473.37		396.71
10/12/06 20:00	24.54	329.66	276.77	389.02	622.89	455.07	420.95	431.42	418.94	473.37		396.72
10/12/06 20:15	24.55	329.66	276.78	389.00	622.91	455.07	420.95	431.42	418.94	473.36		396.71
10/12/06 20:30	24.55	329.67	276.78	389.03	622.91	455.07	420.94	431.42	418.95	473.36		396.72
10/12/06 20:45	24.55	329.67	276.78	389.02	622.91	455.08	420.95	431.42	418.95	473.36		396.72
10/12/06 21:00	24.55	329.67	276.78	389.03	622.91	455.08	420.94	431.42	418.95	473.36		396.72
10/12/06 21:15	24.55	329.67	276.78	389.02	622.92	455.08	420.95	431.42	418.95	473.36		396.74
10/12/06 21:30	24.56	329.68	276.78	389.05	622.92	455.08	420.95	431.42	418.95	473.36		396.73
10/12/06 21:45	24.56	329.69	276.78	389.03	622.93	455.08	420.95	431.42	418.95	473.36		396.74
10/12/06 22:00	24.56	329.69	276.79	389.05	622.93	455.09	420.96	431.43	418.95	473.36		396.74
10/12/06 22:15	24.57	329.69	276.79	389.03	622.94	455.08	420.95	431.42	418.95	473.35		396.74
10/12/06 22:30	24.57	329.69	276.79	389.05	622.95	455.09	420.96	431.43	418.96	473.36		396.76
10/12/06 22:45	24.56	329.70	276.79	389.05	622.95	455.09	420.96	431.43	418.96	473.36		396.76
10/12/06 23:00	24.56	329.70	276.79	389.05	622.95	455.09	420.96	431.43	418.96	473.37		396.75
10/12/06 23:15	24.57	329.70	276.79	389.03	622.96	455.09	420.96	431.43	418.96	473.36		396.76
10/12/06 23:30	24.57	329.71	276.79	389.05	622.96	455.09	420.96	431.43	418.96	473.36		396.77
10/12/06 23:45	24.57	329.72	276.80	389.05	622.97	455.09	420.96	431.44	418.96	473.36		396.77
10/13/06 0:00	24.57	329.72	276.79	389.11	622.97	455.09	420.97	431.44	418.96	473.37		396.77
10/13/06 0:15	24.57	329.72	276.79	389.10	622.98	455.10	420.97	431.43	418.96	473.37		396.77
10/13/06 0:30	24.57	329.73	276.80	389.06	622.99	455.10	420.97	431.44	418.97	473.37		396.78
10/13/06 0:45	24.57	329.73	276.80	389.08	622.99	455.10	420.98	431.44	418.97	473.37		396.78
10/13/06 1:00	24.57	329.73	276.80	389.06	622.99	455.10	420.98	431.44	418.97	473.37		396.78
10/13/06 1:15	24.57	329.73	276.80	389.10	623.00	455.10	420.99	431.44	418.97	473.37		396.79
10/13/06 1:30	24.57	329.74	276.80	389.08	623.01	455.10	420.99	431.44	418.97	473.38		396.80
10/13/06 1:45	24.57	329.74	276.80	389.08	623.01	455.10	420.99	431.44	418.97	473.37		396.80
10/13/06 2:00	24.57	329.75	276.80	389.11	623.02	455.10	420.98	431.44	418.97	473.38		396.80
10/13/06 2:15	24.57	329.75	276.80	389.11	623.03	455.11	420.98	431.44	418.97	473.38		396.81
10/13/06 2:30	24.58	329.75	276.81	389.08	623.03	455.11	420.97	431.45	418.97	473.38		396.81
10/13/06 2:45	24.57	329.76	276.81	389.10	623.04	455.11	420.99	431.45	418.98	473.38		396.82
10/13/06 3:00	24.57	329.76	276.81	389.15	623.04	455.11	420.99	431.45	418.98	473.38		396.82
10/13/06 3:15	24.57	329.76	276.81	389.15	623.04	455.11	420.99	431.45	418.98	473.38		396.82
10/13/06 3:30	24.57	329.76	276.81	389.11	623.05	455.11	420.99	431.45	418.98	473.38		396.82
10/13/06 3:45	24.57	329.77	276.81	389.16	623.05	455.11	420.99	431.45	418.98	473.38		396.82
10/13/06 4:00	24.56	329.77	276.81	389.10	623.06	455.12	420.99	431.45	418.98	473.39		396.83
10/13/06 4:15	24.57	329.77	276.81	389.15	623.06	455.12	420.99	431.45	418.98	473.39		396.83
10/13/06 4:30	24.56	329.78	276.81	389.11	623.07	455.12	420.99	431.45	418.98	473.39		396.83
10/13/06 4:45	24.56	329.78	276.81	389.11	623.07	455.12	420.99	431.45	418.99	473.39		396.84
10/13/06 5:00	24.55	329.78	276.80	389.15	623.07	455.11	421.00	431.44	418.98	473.40		396.85
10/13/06 5:15	24.56	329.78	276.81	389.11	623.08	455.11	421.00	431.45	418.98	473.39		396.84
10/13/06 5:30	24.56	329.78	276.81	389.13	623.08	455.11	421.00	431.44	418.98	473.39		396.84
10/13/06 5:45	24.56	329.79	276.81	389.11	623.09	455.12	421.00	431.44	418.98	473.39		396.85
10/13/06 6:00	24.56	329.79	276.80	389.11	623.09	455.12	421.00	431.45	418.98	473.39		396.84
10/13/06 6:15	24.56	329.79	276.81	389.11	623.09	455.12	420.99	431.45	418.98	473.39		396.85
10/13/06 6:30	24.57	329.79	276.81	389.18	623.10	455.13	420.99	431.46	418.98	473.39		396.86
10/13/06 6:45	24.58	329.80	276.81	389.11	623.10	455.12	420.99	431.45	418.98	473.39		396.87
10/13/06 7:00	24.58	329.80	276.81	389.11	623.11	455.12	420.98	431.45	418.99	473.38		396.87
10/13/06 7:15	24.59	329.81	276.81	389.13	623.11	455.12	420.99	431.45	418.99	473.37		396.87
10/13/06 7:30	24.59	329.81	276.82	389.13	623.12	455.12	420.99	431.46	418.99	473.38		396.87
10/13/06 7:45	24.59	329.82	276.82	389.15	623.12	455.13	420.99	431.46	418.99	473.37		396.87
10/13/06 8:00	24.59	329.82	276.82	389.15	623.13	455.13	421.00	431.46	418.99	473.37		396.87

Power Resources, Inc.
Regional Southwest Area Aquifer Tests
Appendix D-1 - 15-minute Depth to Water Data (All Monitoring Wells)

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
10/13/06 8:15	24.59	329.82	276.82	389.16	623.13	455.13	421.01	431.46	418.99	473.37		396.88
10/13/06 8:30	24.60	329.82	276.81	389.15	623.13	455.13	421.02	431.46	418.99	473.36		396.88
10/13/06 8:45	24.60	329.82	276.82	389.16	623.13	455.13	421.03	431.47	418.99	473.36		396.88
10/13/06 9:00	24.60	329.82	276.82	389.36	623.14	455.13	421.04	431.47	418.99	473.36		396.88
10/13/06 9:15	24.59	329.83	276.81	389.41	623.15	455.13	421.05	431.47	419.01	473.37		396.89
10/13/06 9:30	24.59	329.83	276.82	389.36	623.15	455.13	421.06	431.47	419.01	473.38		396.88
10/13/06 9:45	24.59	329.84	276.82	389.33	623.15	455.13	421.06	431.46	419.02	473.38		396.89
10/13/06 10:00	24.58	329.84	276.81	389.28	623.16	455.13	421.06	431.46	419.02	473.38		396.89
10/13/06 10:15	24.59	329.84	276.81	389.28	623.16	455.13	421.05	431.46	419.02	473.38		396.89
10/13/06 10:30	24.58	329.84	276.81	389.28	623.16	455.13	421.06	431.46	419.02	473.39		396.89
10/13/06 10:45	24.57	329.84	276.81	389.28	623.16	455.12	421.05	431.45	419.02	473.39		396.89
10/13/06 11:00	24.57	329.84	276.80	389.26	623.17	455.12	421.05	431.46	419.03	473.39		396.90
10/13/06 11:15	24.57	329.84	276.80	389.25	623.17	455.12	421.05	431.46	419.02	473.39		396.90
10/13/06 11:30	24.56	329.84	276.81	389.25	623.17	455.12	421.04	431.45	419.02	473.39		396.90
10/13/06 11:45	24.56	329.84	276.79	389.25	623.17	455.12	421.04	431.45	419.02	473.39		396.90
10/13/06 12:00	24.55	329.84	276.79	389.23	623.17	455.11	421.04	431.44	419.02	473.39		396.90
10/13/06 12:15	24.55	329.84	276.78	389.25	623.18	455.11	421.03	431.44	419.02	473.39		396.90
10/13/06 12:30	24.55	329.84	276.79	389.25	623.18	455.11	421.03	431.44	419.02	473.40		396.90
10/13/06 12:45	24.54	329.85	276.79	389.25	623.18	455.11	421.04	431.44	419.02	473.40		396.90
10/13/06 13:00	24.53	329.84	276.79	389.23	623.18	455.11	421.03	431.44	419.01	473.40		396.89
10/13/06 13:15	24.53	329.84	276.78	389.26	623.18	455.10	421.03	431.44	419.01	473.40		396.90
10/13/06 13:30	24.52	329.84	276.78	389.23	623.18	455.10	421.04	431.44	419.01	473.41		396.90
10/13/06 13:45	24.52	329.84	276.78	389.23	623.18	455.10	421.03	431.43	419.01	473.41		396.90
10/13/06 14:00	24.52	329.83	276.77	389.21	623.18	455.10	421.03	431.42	418.99	473.41		396.90
10/13/06 14:15	24.51	329.84	276.77	389.23	623.18	455.10	421.03	431.42	419.00	473.41		396.89
10/13/06 14:30	24.51	329.84	276.77	389.25	623.18	455.10	421.02	431.42	419.01	473.42		396.90
10/13/06 14:45	24.51	329.84	276.77	389.23	623.19	455.09	421.03	431.42	419.00	473.41		396.89
10/13/06 15:00	24.51	329.84	276.77	389.25	623.19	455.09	421.02	431.42	419.00	473.41		396.90
10/13/06 15:15	24.50	329.84	276.77	389.25	623.18	455.09	421.01	431.42	419.00	473.42		396.90
10/13/06 15:30	24.50	329.84	276.77	389.26	623.19	455.08	420.96	431.40	419.00	473.42		396.90
10/13/06 15:45	24.51	329.84	276.75	389.26	623.19	455.09	420.96	431.41	419.00	473.42		396.90
10/13/06 16:00	24.51	329.85	276.77	389.21	623.19	455.08	420.97	431.41	419.00	473.42		396.90
10/13/06 16:15	24.51	329.84	276.77	389.25	623.19	455.09	420.98	431.42	419.00	473.41		396.91
10/13/06 16:30	24.52	329.85	276.77	389.31	623.19	455.09	420.97	431.42	419.00	473.42		396.91
10/13/06 16:45	24.52	329.85	276.76	389.23	623.19	455.09	420.97	431.42	419.00	473.41		396.91
10/13/06 17:00	24.53	329.85	276.76	389.23	623.19	455.09	420.96	431.42	419.00	473.41		396.91
10/13/06 17:15	24.54	329.86	276.77	389.23	623.19	455.09	420.96	431.42	419.01	473.41		396.91
10/13/06 17:30	24.54	329.86	276.77	389.23	623.20	455.09	420.96	431.42	419.01	473.41		396.92
10/13/06 17:45	24.54	329.87	276.77	389.23	623.19	455.09	420.95	431.42	419.01	473.41		396.92
10/13/06 18:00	24.55	329.86	276.77	389.23	623.19	455.09	420.96	431.42	419.01	473.41		396.92
10/13/06 18:15	24.55	329.87	276.77	389.30	623.19	455.09	420.96	431.42	419.01	473.41		396.93
10/13/06 18:30	24.56	329.87	276.77	389.28	623.19	455.09	420.96	431.42	419.01	473.41		396.93
10/13/06 18:45	24.57	329.87	276.77	389.33	623.19	455.09	420.96	431.42	419.01	473.40		396.94
10/13/06 19:00	24.58	329.88	276.78	389.41	623.20	455.10	420.96	431.42	419.01	473.40		396.95
10/13/06 19:15	24.59	329.88	276.78	389.48	623.20	455.10	420.96	431.43	419.02	473.39		396.95
10/13/06 19:30	24.60	329.89	276.78	389.35	623.20	455.11	420.97	431.43	419.02	473.39		396.96
10/13/06 19:45	24.60	329.89	276.78	389.33	623.20	455.11	420.97	431.43	419.02	473.39		396.96
10/13/06 20:00	24.61	329.90	276.79	389.33	623.20	455.11	420.97	431.44	419.03	473.39		396.96
10/13/06 20:15	24.61	329.90	276.79	389.43	623.20	455.11	420.97	431.43	419.03	473.39		396.96
10/13/06 20:30	24.62	329.90	276.79	389.26	623.20	455.11	420.97	431.43	419.03	473.39		396.97
10/13/06 20:45	24.62	329.91	276.79	389.36	623.20	455.11	420.98	431.44	419.03	473.39		396.97
10/13/06 21:00	24.62	329.91	276.79	389.31	623.19	455.12	420.98	431.44	419.03	473.38		396.98
10/13/06 21:15	24.62	329.91	276.79	389.31	623.19	455.12	420.98	431.44	419.03	473.39		396.98
10/13/06 21:30	24.62	329.91	276.79	389.31	623.19	455.12	420.98	431.44	419.03	473.39		396.98
10/13/06 21:45	24.62	329.92	276.79	389.31	623.19	455.12	420.98	431.44	419.03	473.39		396.98
10/13/06 22:00	24.62	329.92	276.79	389.31	623.19	455.12	420.99	431.44	419.03	473.39		396.98
10/13/06 22:15	24.62	329.92	276.79	389.28	623.18	455.12	420.98	431.44	419.03	473.39		396.99
10/13/06 22:30	24.62	329.92	276.79	389.28	623.18	455.12	420.98	431.44	419.03	473.39		397.00
10/13/06 22:45	24.62	329.93	276.79	389.31	623.18	455.12	420.98	431.44	419.03	473.39		396.98
10/13/06 23:00	24.62	329.93	276.79	389.36	623.17	455.12	420.99	431.44	419.04	473.39		396.99
10/13/06 23:15	24.62	329.93	276.79	389.30	623.17	455.12	420.99	431.44	419.03	473.39		397.00
10/13/06 23:30	24.62	329.93	276.79	389.30	623.17	455.12	420.99	431.44	419.03	473.39		396.99
10/13/06 23:45	24.62	329.93	276.79	389.35	623.17	455.12	421.00	431.44	419.03	473.39		397.00
10/14/06 0:00	24.62	329.94	276.79	389.48	623.17	455.12	421.00	431.44	419.03	473.39		397.00
10/14/06 0:15	24.61	329.94	276.79	389.30	623.16	455.12	421.01	431.44	419.04	473.40		397.01
10/14/06 0:30	24.61	329.94	276.79	389.36	623.16	455.12	421.01	431.44	419.03	473.40		397.01
10/14/06 0:45	24.61	329.94	276.79	389.25	623.15	455.12	421.00	431.44	419.03	473.40		397.00
10/14/06 1:00	24.61	329.94	276.79	389.43	623.15	455.12	421.00	431.44	419.03	473.41		397.01
10/14/06 1:15	24.60	329.94	276.79	389.28	623.14	455.12	421.01	431.44	419.03	473.41		397.01
10/14/06 1:30	24.60	329.94	276.79	389.28	623.14	455.12	421.02	431.44	419.03	473.41		397.00
10/14/06 1:45	24.60	329.94	276.79	389.30	623.13	455.12	421.01	431.44	419.03	473.41		397.01
10/14/06 2:00	24.60	329.94	276.79	389.30	623.13	455.12	421.01	431.44	419.03	473.41		397.01
10/14/06 2:15	24.60	329.94	276.79	389.35	623.13	455.12	421.01	431.44	419.03	473.41		397.01
10/14/06 2:30	24.60	329.95	276.79	389.30	623.12	455.12	421.00	431.44	419.03	473.41		397.01
10/14/06 2:45	24.60	329.95	276.79	389.31	623.12	455.12	421.01	431.44	419.04	473.42		397.01
10/14/06 3:00	24.60	329.96	276.79	389.28	623.11	455.12	421.00	431.44	419.04	473.42		397.01
10/14/06 3:15	24.60	329.95	276.79	389.28	623.11	455.12	421.00	431.44	419.04	473.42		397.01
10/14/06 3:30	24.59	329.95	276.79	389.31	623.10	455.12	421.01	431.44	419.04	473.43		397.01
10/14/06 3:45	24.58	329.95	276.78	389.28	623.09	455.12	421.02	431.44	419.03	473.43		397.01
10/14/06 4:00	24.58	329.95	276.79	389.30	623.09	455.11	421.03	431.44	419.03	473.43		397.01
10/14/06 4:15	24.58	329.95	276.79	389.28	623.08	455.12	421.02	431.44	419.03	473.44		397.01
10/14/06 4:30	24.57	329.96	276.78	389.28	623.08	455.12	421.03	431.44	419.03	473.44		397.01
10/14/06 4:45	24.57	329.96	276.79	389.25	623.07	455.11	421.03	431.44	419.03	473.44		397.01
10/14/06 5:00	24.57	329.96	276.78	389.28	623.07	455.11	421.03	431.44	419.03	473.44		397.01
10/14/06 5:15	24.57	329.96	276.78	389.28	623.07	455.11	421.03	431.44	419.03	473.45		397.01
10/14/06 5:30	24.57	329.96	276.78	389.30	623.06	455.11	421.03	431.44	419.03	473.45		397.01
10/14/06 5:45	24.57	329.96	276.78	389.30	623.06	455.11	421.02	431.44	419.03	473.45		397.01
10/14/06 6:00	24.57	329.96	276.78	389.33	623.05	455.12	421.02	431.44	419.03	473.45		397.02
10/14/06 6:15	24.57	329.96	276.78	389.30	623.05	455.12	421.02	431.44	419.03	473.45		397.02
10/14/06 6:30	24.57	329.96	276.78	389.31	623.05	455.12	421.02	431.44	419.03	473.45		397.02
10/14/06 6:45	24.56	329.96	276.78	389.33	623.04	455.12	421.02	431.44	419.03	473.45		397.02
10/14/06 7:00	24.56	329.96	276.78	389.31	623.04	455.12	421.02	431.44	419.03	473.46		397.02
10/14/06 7:15	24.56	329.96	276.78	389.33	623.03	455.12	421.03	431.44	419.03	473.46		397.02
10/14/06 7:30	24.56	329.96	276.79	389.35	623.03	455.12	421.03	431.44	419.03	473.46		397.02
10/14/06 7:45	24.56	329.96	276.78	389.31	623.02	455.11	421.03	431.44	419.03	473.46		397.02
10/14/06 8:00	24.56	329.97	276.78	389.31	623.02	455.12	421.04	431.44	419.03	473.46		397.01
10/14/06 8:15	24.56	329.97	276.79	389.31	623.01	455.12	421.05	431.44	419.03	473.46		397.02
10/14/06 8:30	24.56	329.97	276.78	389.31	623.01	455.12	421.05	431.44	419.03	473.46		397.02
10/14/06 8:45	24.56	329.97	276.79	389.33	623.00	455.12	421.05	431.44	419.03	473.46		397.01

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
10/14/06 9:00	24.55	329.97	276.79	389.31	623.00	455.12	421.05	431.44	419.03	473.46		397.02
10/14/06 9:15	24.55	329.97	276.78	389.30	622.99	455.12	421.05	431.44	419.03	473.46		397.01
10/14/06 9:30	24.54	329.97	276.79	389.30	622.99	455.12	421.05	431.44	419.03	473.46		397.01
10/14/06 9:45	24.54	329.97	276.78	389.35	622.98	455.12	421.05	431.44	419.03	473.46		397.01
10/14/06 10:00	24.53	329.96	276.78	389.30	622.97	455.11	421.04	431.44	419.03	473.46		397.01
10/14/06 10:15	24.52	329.97	276.77	389.28	622.97	455.11	421.04	431.44	419.03	473.46		397.01
10/14/06 10:30	24.52	329.96	276.76	389.30	622.96	455.11	421.03	431.44	419.03	473.46		397.01
10/14/06 10:45	24.51	329.96	276.77	389.28	622.95	455.11	421.04	431.43	419.02	473.46		397.01
10/14/06 11:00	24.51	329.96	276.77	389.30	622.94	455.11	421.04	431.44	419.02	473.46		397.01
10/14/06 11:15	24.50	329.96	276.76	389.30	622.94	455.10	421.04	431.42	419.02	473.46		397.00
10/14/06 11:30	24.49	329.95	276.75	389.30	622.93	455.10	421.02	431.42	419.02	473.46		397.01
10/14/06 11:45	24.49	329.95	276.76	389.28	622.92	455.11	421.01	431.42	419.02	473.46		397.01
10/14/06 12:00	24.48	329.95	276.75	389.28	622.92	455.09	421.03	431.42	419.00	473.46		397.00
10/14/06 12:15	24.48	329.94	276.74	389.28	622.91	455.09	421.03	431.42	419.01	473.46		396.98
10/14/06 12:30	24.47	329.94	276.74	389.28	622.90	455.09	421.03	431.42	419.00	473.47		396.99
10/14/06 12:45	24.45	329.94	276.73	389.26	622.89	455.08	421.01	431.40	419.00	473.47		396.98
10/14/06 13:00	24.45	329.93	276.74	389.26	622.88	455.08	421.02	431.40	419.00	473.47		396.97
10/14/06 13:15	24.45	329.93	276.73	389.26	622.87	455.07	420.98	431.39	418.99	473.47		396.97
10/14/06 13:30	24.43	329.93	276.74	389.28	622.86	455.07	421.01	431.40	418.99	473.47		396.97
10/14/06 13:45	24.43	329.92	276.72	389.30	622.85	455.07	421.01	431.39	418.98	473.48		396.96
10/14/06 14:00	24.43	329.92	276.72	389.30	622.85	455.07	421.01	431.39	418.99	473.48		396.96
10/14/06 14:15	24.42	329.92	276.72	389.36	622.84	455.06	421.00	431.39	418.98	473.48		396.96
10/14/06 14:30	24.41	329.91	276.71	389.31	622.83	455.05	421.00	431.39	418.98	473.48		396.96
10/14/06 14:45	24.41	329.91	276.70	389.41	622.82	455.06	420.99	431.38	418.98	473.48		396.96
10/14/06 15:00	24.41	329.91	276.70	389.49	622.82	455.05	420.97	431.37	418.98	473.48		396.95
10/14/06 15:15	24.41	329.90	276.70	389.56	622.81	455.05	420.94	431.38	418.97	473.48		396.95
10/14/06 15:30	24.41	329.90	276.70	389.31	622.80	455.05	420.94	431.38	418.97	473.48		396.94
10/14/06 15:45	24.41	329.90	276.70	389.20	622.79	455.05	420.93	431.36	418.96	473.48		396.94
10/14/06 16:00	24.41	329.89	276.70	389.23	622.79	455.04	420.94	431.37	418.96	473.48		396.95
10/14/06 16:15	24.42	329.90	276.70	389.21	622.78	455.05	420.93	431.37	418.97	473.48		396.95
10/14/06 16:30	24.42	329.90	276.70	389.20	622.78	455.05	420.92	431.37	418.96	473.48		396.94
10/14/06 16:45	24.42	329.90	276.70	389.26	622.77	455.05	420.94	431.36	418.97	473.48		396.94
10/14/06 17:00	24.42	329.90	276.70	389.35	622.76	455.04	420.92	431.36	418.97	473.48		396.94
10/14/06 17:15	24.43	329.89	276.69	389.44	622.75	455.04	420.92	431.36	418.96	473.48		396.93
10/14/06 17:30	24.43	329.89	276.70	389.26	622.75	455.04	420.92	431.36	418.96	473.48		396.93
10/14/06 17:45	24.43	329.89	276.70	389.63	622.75	455.04	420.92	431.36	418.96	473.49		396.93
10/14/06 18:00	24.43	329.89	276.69	389.63	622.74	455.04	420.92	431.36	418.96	473.49		396.94
10/14/06 18:15	24.43	329.89	276.69	389.61	622.73	455.04	420.91	431.36	418.96	473.49		396.93
10/14/06 18:30	24.44	329.89	276.69	389.61	622.73	455.04	420.92	431.36	418.96	473.49		396.92
10/14/06 18:45	24.44	329.89	276.70	389.38	622.73	455.04	420.92	431.36	418.96	473.49		396.93
10/14/06 19:00	24.44	329.89	276.70	389.46	622.72	455.04	420.92	431.36	418.97	473.49		396.93
10/14/06 19:15	24.44	329.89	276.70	389.41	622.72	455.04	420.92	431.36	418.96	473.49		396.92
10/14/06 19:30	24.44	329.89	276.70	389.36	622.71	455.04	420.92	431.36	418.97	473.49		396.92
10/14/06 19:45	24.45	329.89	276.70	389.35	622.71	455.05	420.92	431.37	418.97	473.49		396.93
10/14/06 20:00	24.45	329.89	276.70	389.30	622.71	455.05	420.92	431.36	418.97	473.49		396.92
10/14/06 20:15	24.45	329.89	276.70	389.23	622.70	455.05	420.92	431.36	418.97	473.49		396.93
10/14/06 20:30	24.45	329.89	276.69	389.20	622.69	455.05	420.92	431.36	418.97	473.49		396.93
10/14/06 20:45	24.45	329.89	276.70	389.21	622.69	455.05	420.92	431.37	418.97	473.49		396.93
10/14/06 21:00	24.45	329.89	276.70	389.21	622.69	455.05	420.93	431.37	418.97	473.50		396.93
10/14/06 21:15	24.45	329.89	276.70	389.20	622.68	455.04	420.92	431.36	418.97	473.50		396.93
10/14/06 21:30	24.45	329.89	276.70	389.20	622.67	455.05	420.92	431.36	418.97	473.50		396.93
10/14/06 21:45	24.45	329.89	276.70	389.21	622.67	455.05	420.92	431.37	418.97	473.50		396.92
10/14/06 22:00	24.45	329.89	276.70	389.21	622.67	455.05	420.93	431.37	418.97	473.50		396.93
10/14/06 22:15	24.45	329.89	276.70	389.21	622.66	455.05	420.93	431.37	418.97	473.50		396.91
10/14/06 22:30	24.45	329.89	276.70	389.23	622.65	455.05	420.92	431.36	418.97	473.50		396.92
10/14/06 22:45	24.45	329.89	276.70	389.21	622.65	455.05	420.92	431.36	418.97	473.50		396.92
10/14/06 23:00	24.45	329.89	276.70	389.20	622.64	455.05	420.93	431.36	418.97	473.50		396.92
10/14/06 23:15	24.45	329.89	276.70	389.21	622.64	455.05	420.94	431.36	418.97	473.50		396.92
10/14/06 23:30	24.44	329.89	276.70	389.21	622.63	455.04	420.94	431.36	418.97	473.50		396.91
10/14/06 23:45	24.44	329.88	276.70	389.33	622.63	455.04	420.95	431.36	418.97	473.50		396.91
10/15/06 0:00	24.44	329.88	276.69	389.30	622.62	455.04	420.96	431.36	418.97	473.50		396.91
10/15/06 0:15	24.44	329.88	276.68	389.25	622.61	455.04	420.96	431.36	418.97	473.50		396.91
10/15/06 0:30	24.44	329.88	276.68	389.31	622.61	455.04	420.96	431.36	418.97	473.50		396.91
10/15/06 0:45	24.43	329.88	276.68	389.26	622.61	455.04	420.96	431.36	418.97	473.50		396.91
10/15/06 1:00	24.43	329.87	276.68	389.26	622.59	455.04	420.96	431.36	418.97	473.51		396.91
10/15/06 1:15	24.43	329.87	276.68	389.25	622.59	455.04	420.96	431.36	418.96	473.51		396.91
10/15/06 1:30	24.43	329.87	276.68	389.23	622.58	455.04	420.95	431.36	418.96	473.51		396.90
10/15/06 1:45	24.43	329.87	276.68	389.23	622.58	455.04	420.96	431.36	418.96	473.51		396.90
10/15/06 2:00	24.42	329.87	276.68	389.26	622.58	455.04	420.96	431.36	418.96	473.51		396.90
10/15/06 2:15	24.43	329.87	276.68	389.26	622.57	455.04	420.96	431.36	418.96	473.51		396.90
10/15/06 2:30	24.43	329.87	276.68	389.26	622.57	455.04	420.95	431.36	418.96	473.51		396.90
10/15/06 2:45	24.43	329.87	276.68	389.28	622.56	455.04	420.95	431.36	418.96	473.51		396.89
10/15/06 3:00	24.42	329.87	276.68	389.26	622.56	455.04	420.96	431.36	418.96	473.51		396.89
10/15/06 3:15	24.42	329.86	276.68	389.30	622.55	455.04	420.96	431.36	418.96	473.52		396.90
10/15/06 3:30	24.42	329.87	276.68	389.26	622.54	455.03	420.96	431.36	418.96	473.52		396.89
10/15/06 3:45	24.42	329.86	276.68	389.28	622.54	455.03	420.96	431.36	418.96	473.52		396.88
10/15/06 4:00	24.42	329.86	276.68	389.26	622.53	455.03	420.95	431.36	418.96	473.52		396.89
10/15/06 4:15	24.41	329.86	276.68	389.31	622.53	455.03	420.96	431.36	418.96	473.52		396.89
10/15/06 4:30	24.41	329.86	276.68	389.28	622.52	455.03	420.97	431.36	418.96	473.52		396.89
10/15/06 4:45	24.41	329.86	276.68	389.28	622.52	455.03	420.96	431.36	418.96	473.52		396.88
10/15/06 5:00	24.41	329.85	276.68	389.30	622.51	455.03	420.96	431.36	418.96	473.45		396.88
10/15/06 5:15	24.40	329.85	276.68	389.28	622.51	455.03	420.95	431.36	418.96	473.45		396.87
10/15/06 5:30	24.40	329.85	276.68	389.30	622.51	455.03	420.96	431.36	418.96	473.45		396.88
10/15/06 5:45	24.41	329.85	276.68	389.33	622.50	455.04	420.96	431.37	418.96	473.45		396.87
10/15/06 6:00	24.41	329.85	276.68	389.30	622.50	455.04	420.95	431.36	418.96	473.45		396.88
10/15/06 6:15	24.40	329.86	276.68	389.31	622.49	455.04	420.96	431.36	418.96	473.45		396.88
10/15/06 6:30	24.40	329.85	276.68	389.30	622.49	455.04	420.96	431.37	418.96	473.46		396.88
10/15/06 6:45	24.40	329.85	276.69	389.31	622.49	455.04	420.97	431.36	418.96	473.46		396.87
10/15/06 7:00	24.40	329.85	276.68	389.33	622.48	455.04	420.97	431.36	418.97	473.46		396.87
10/15/06 7:15	24.40	329.85	276.69	389.30	622.48	455.04	420.96	431.37	418.96	473.46		396.87
10/15/06 7:30	24.40	329.86	276.69	389.28	622.47	455.05	420.98	431.37	418.96	473.46		396.87
10/15/06 7:45	24.40	329.85	276.69	389.28	622.47	455.05	420.98	431.37	418.97	473.46		396.87
10/15/06 8:00	24.40	329.86	276.69	389.26	622.47	455.04	420.99	431.37	418.97	473.46		396.87
10/15/06 8:15	24.40	329.86	276.69	389.30	622.46	455.05	421.00	431.37	418.97	473.46		396.87
10/15/06 8:30	24.39	329.85	276.69	389.28	622.46	455.05	420.99	431.37	418.97	473.46		396.87
10/15/06 8:45	24.39	329.85	276.69	389.30	622.45	455.05	420.99	431.37	418.97	473.46		396.87
10/15/06 9:00	24.39	329.85	276.69	389.28	622.45	455.05	420.99	431.37	418.97	473.46		396.87
10/15/06 9:15	24.38	329.85	276.69	389.33	622.45	455.05	421.00	431.38	418.97	473.47		396.87
10/15/06 9:30	24.38	329.85	276.69	389.43	622.44	455.05	420.99	431.38	418.97	473.47		396.87
10/15/06 9:45	24.37	329.85	276.69	389.33	622.43	455.05	421.00	431.38	418.97	473.47		396.86

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
10/15/06 10:00	24.36	329.85	276.68	389.23	622.43	455.04	420.99	431.37	418.97	473.47		396.87
10/15/06 10:15	24.36	329.84	276.68	389.20	622.42	455.04	421.00	431.37	418.97	473.47		396.86
10/15/06 10:30	24.35	329.84	276.68	389.38	622.41	455.04	421.01	431.37	418.96	473.47		396.85
10/15/06 10:45	24.35	329.84	276.68	389.25	622.41	455.04	420.99	431.36	418.96	473.47		396.85
10/15/06 11:00	24.34	329.83	276.67	389.20	622.40	455.03	420.99	431.36	418.96	473.47		396.85
10/15/06 11:15	24.33	329.83	276.67	389.31	622.39	455.03	420.99	431.36	418.96	473.48		396.85
10/15/06 11:30	24.33	329.83	276.67	389.30	622.39	455.03	420.98	431.36	418.95	473.48		396.84
10/15/06 11:45	24.33	329.82	276.67	389.28	622.38	455.03	420.98	431.36	418.95	473.48		396.84
10/15/06 12:00	24.32	329.82	276.66	389.30	622.37	455.02	420.98	431.36	418.95	473.48		396.83
10/15/06 12:15	24.31	329.81	276.66	389.23	622.36	455.02	420.97	431.35	418.94	473.48		396.82
10/15/06 12:30	24.31	329.81	276.65	389.25	622.35	455.02	420.97	431.34	418.94	473.49		396.82
10/15/06 12:45	24.29	329.80	276.64	389.23	622.34	455.01	420.92	431.34	418.94	473.49		396.82
10/15/06 13:00	24.29	329.79	276.64	389.23	622.33	455.00	420.91	431.33	418.93	473.42		396.80
10/15/06 13:15	24.28	329.79	276.64	389.20	622.33	455.00	420.91	431.32	418.92	473.42		396.81
10/15/06 13:30	24.27	329.78	276.62	389.18	622.32	454.99	420.90	431.32	418.92	473.43		396.80
10/15/06 13:45	24.26	329.78	276.63	389.23	622.31	454.99	420.90	431.31	418.92	473.43		396.79
10/15/06 14:00	24.25	329.77	276.62	389.23	622.30	454.98	420.89	431.31	418.91	473.43		396.78
10/15/06 14:15	24.25	329.77	276.62	389.20	622.29	454.98	420.89	431.31	418.90	473.43		396.77
10/15/06 14:30	24.24	329.76	276.61	389.18	622.29	454.98	420.89	431.30	418.91	473.44		396.77
10/15/06 14:45	24.23	329.76	276.61	389.21	622.27	454.97	420.89	431.31	418.90	473.44		396.77
10/15/06 15:00	24.23	329.75	276.61	389.30	622.27	454.97	420.88	431.30	418.90	473.42		396.76
10/15/06 15:15	24.22	329.74	276.60	389.26	622.26	454.97	420.88	431.29	418.89	473.40		396.76
10/15/06 15:30	24.21	329.74	276.60	389.10	622.25	454.96	420.87	431.29	418.89	473.39		396.75
10/15/06 15:45	24.21	329.73	276.59	389.16	622.25	454.96	420.87	431.29	418.89	473.39		396.74
10/15/06 16:00	24.22	329.73	276.59	389.13	622.24	454.96	420.87	431.29	418.89	473.39		396.74
10/15/06 16:15	24.22	329.73	276.59	389.20	622.24	454.95	420.87	431.28	418.89	473.39		396.73
10/15/06 16:30	24.22	329.73	276.59	389.20	622.23	454.95	420.87	431.28	418.88	473.40		396.73
10/15/06 16:45	24.21	329.73	276.58	389.21	622.22	454.95	420.87	431.28	418.88	473.40		396.73
10/15/06 17:00	24.21	329.72	276.58	389.15	622.22	454.95	420.86	431.28	418.88	473.40		396.73
10/15/06 17:15	24.20	329.72	276.59	389.16	622.21	454.95	420.86	431.28	418.88	473.41		396.72
10/15/06 17:30	24.20	329.71	276.58	389.18	622.20	454.94	420.86	431.27	418.87	473.41		396.72
10/15/06 17:45	24.20	329.71	276.58	389.16	622.20	454.94	420.86	431.27	418.87	473.41		396.72
10/15/06 18:00	24.20	329.71	276.58	389.15	622.19	454.94	420.86	431.27	418.87	473.41		396.72
10/15/06 18:15	24.20	329.71	276.57	389.25	622.19	454.94	420.85	431.27	418.87	473.41		396.72
10/15/06 18:30	24.20	329.71	276.58	389.15	622.18	454.94	420.85	431.27	418.87	473.41		396.72
10/15/06 18:45	24.21	329.71	276.58	389.15	622.18	454.94	420.85	431.26	418.87	473.41		396.71
10/15/06 19:00	24.21	329.70	276.58	389.15	622.17	454.94	420.85	431.27	418.87	473.42		396.71
10/15/06 19:15	24.21	329.70	276.58	389.35	622.17	454.94	420.86	431.27	418.87	473.42		396.71
10/15/06 19:30	24.22	329.70	276.58	389.10	622.17	454.94	420.85	431.27	418.87	473.41		396.70
10/15/06 19:45	24.21	329.70	276.58	389.13	622.16	454.94	420.86	431.27	418.87	473.41		396.70
10/15/06 20:00	24.21	329.70	276.58	389.16	622.16	454.94	420.85	431.27	418.87	473.42		396.71
10/15/06 20:15	24.21	329.70	276.58	389.18	622.15	454.94	420.86	431.27	418.87	473.40		396.70
10/15/06 20:30	24.21	329.70	276.58	389.25	622.15	454.94	420.85	431.27	418.87	473.39		396.70
10/15/06 20:45	24.21	329.70	276.58	389.21	622.15	454.94	420.85	431.27	418.87	473.39		396.70
10/15/06 21:00	24.20	329.70	276.58	389.20	622.14	454.94	420.86	431.27	418.87	473.39		396.69
10/15/06 21:15	24.20	329.69	276.58	389.15	622.14	454.93	420.85	431.27	418.87	473.40		396.69
10/15/06 21:30	24.20	329.69	276.58	389.16	622.13	454.94	420.85	431.26	418.87	473.40		396.68
10/15/06 21:45	24.19	329.69	276.58	389.13	622.13	454.93	420.85	431.26	418.87	473.40		396.69
10/15/06 22:00	24.19	329.68	276.57	389.20	622.12	454.94	420.85	431.27	418.87	473.40		396.68
10/15/06 22:15	24.19	329.68	276.57	389.16	622.11	454.93	420.85	431.26	418.87	473.41		396.68
10/15/06 22:30	24.18	329.68	276.57	389.15	622.11	454.93	420.85	431.26	418.87	473.41		396.68
10/15/06 22:45	24.18	329.68	276.57	389.13	622.11	454.93	420.85	431.26	418.87	473.41		396.68
10/15/06 23:00	24.18	329.68	276.57	389.21	622.10	454.93	420.85	431.26	418.86	473.41		396.67
10/15/06 23:15	24.17	329.67	276.56	389.26	622.09	454.93	420.84	431.26	418.86	473.42		396.67
10/15/06 23:30	24.17	329.67	276.56	389.10	622.09	454.92	420.85	431.25	418.86	473.42		396.67
10/15/06 23:45	24.16	329.67	276.56	389.20	622.08	454.92	420.84	431.25	418.86	473.36		396.66
10/16/06 0:00	24.16	329.66	276.55	389.08	622.08	454.92	420.84	431.25	418.86	473.36		396.66
10/16/06 0:15	24.16	329.66	276.55	389.21	622.07	454.92	420.83	431.24	418.86	473.36		396.65
10/16/06 0:30	24.16	329.66	276.55	389.08	622.06	454.92	420.84	431.25	418.86	473.37		396.65
10/16/06 0:45	24.15	329.65	276.55	389.20	622.05	454.92	420.84	431.25	418.86	473.37		396.64
10/16/06 1:00	24.15	329.65	276.54	389.05	622.05	454.91	420.83	431.24	418.85	473.37		396.64
10/16/06 1:15	24.15	329.64	276.54	389.26	622.04	454.91	420.83	431.24	418.85	473.37		396.63
10/16/06 1:30	24.15	329.64	276.55	389.38	622.04	454.91	420.83	431.25	418.85	473.36		396.64
10/16/06 1:45	24.15	329.64	276.55	389.03	622.04	454.91	420.83	431.25	418.85	473.36		396.63
10/16/06 2:00	24.15	329.64	276.54	389.03	622.03	454.91	420.83	431.24	418.85	473.36		396.63
10/16/06 2:15	24.15	329.64	276.54	389.31	622.02	454.90	420.83	431.25	418.84	473.36		396.63
10/16/06 2:30	24.14	329.64	276.54	389.23	622.02	454.91	420.82	431.24	418.85	473.36		396.63
10/16/06 2:45	24.15	329.63	276.54	389.11	622.02	454.91	420.82	431.24	418.84	473.36		396.63
10/16/06 3:00	24.15	329.64	276.54	389.08	622.02	454.91	420.83	431.25	418.85	473.36		396.62
10/16/06 3:15	24.15	329.64	276.54	389.08	622.01	454.91	420.83	431.24	418.85	473.36		396.62
10/16/06 3:30	24.15	329.63	276.55	389.08	622.01	454.91	420.83	431.24	418.85	473.36		396.62
10/16/06 3:45	24.15	329.64	276.55	389.20	622.01	454.91	420.83	431.25	418.85	473.35		396.62
10/16/06 4:00	24.16	329.63	276.55	389.15	622.00	454.91	420.83	431.24	418.85	473.36		396.63
10/16/06 4:15	24.15	329.63	276.55	389.20	622.00	454.91	420.83	431.24	418.85	473.36		396.62
10/16/06 4:30	24.16	329.63	276.54	389.08	621.99	454.91	420.83	431.25	418.85	473.36		396.62
10/16/06 4:45	24.16	329.63	276.55	389.08	621.99	454.91	420.83	431.25	418.85	473.36		396.62
10/16/06 5:00	24.16	329.63	276.55	389.21	621.99	454.91	420.84	431.25	418.85	473.36		396.62
10/16/06 5:15	24.16	329.62	276.55	389.08	621.99	454.91	420.84	431.25	418.85	473.36		396.62
10/16/06 5:30	24.16	329.62	276.55	389.11	621.99	454.92	420.83	431.25	418.85	473.36		396.62
10/16/06 5:45	24.16	329.63	276.55	389.15	621.98	454.92	420.82	431.25	418.85	473.37		396.62
10/16/06 6:00	24.16	329.63	276.55	389.11	621.98	454.92	420.82	431.26	418.85	473.37		396.62
10/16/06 6:15	24.16	329.62	276.55	389.15	621.98	454.92	420.82	431.26	418.85	473.37		396.62
10/16/06 6:30	24.16	329.63	276.55	389.13	621.98	454.92	420.83	431.26	418.85	473.37		396.62
10/16/06 6:45	24.16	329.63	276.55	389.15	621.97	454.92	420.84	431.26	418.85	473.37		396.62
10/16/06 7:00	24.16	329.63	276.55	389.10	621.97	454.92	420.85	431.26	418.85	473.38		396.62
10/16/06 7:15	24.15	329.63	276.55	389.11	621.97	454.92	420.85	431.26	418.85	473.38		396.62
10/16/06 7:30	24.16	329.62	276.56	389.15	621.97	454.93	420.85	431.26	418.86	473.38		396.62
10/16/06 7:45	24.16	329.63	276.56	389.11	621.96	454.93	420.86	431.26	418.86	473.38		396.62
10/16/06 8:00	24.16	329.63	276.57	389.13	621.97	454.93	420.85	431.27	418.86	473.37		396.62
10/16/06 8:15	24.17	329.63	276.57	389.15	621.96	454.94	420.85	431.28	418.87	473.37		396.62
10/16/06 8:30	24.17	329.63	276.57	389.10	621.96	454.94	420.86	431.27	418.87	473.37		396.62
10/16/06 8:45	24.18	329.64	276.58	389.15	621.96	454.95	420.85	431.28	418.88	473.37		396.62
10/16/06 9:00	24.18	329.64	276.58	389.05	621.96	454.94	420.84	431.28	418.88	473.36		396.62
10/16/06 9:15	24.18	329.64	276.57	389.69	621.95	454.95	420.84	431.28	418.87	473.36		396.62
10/16/06 9:30	24.18	329.64	276.58	389.48	621.95	454.95	420.84	431.28	418.88	473.37		396.62
10/16/06 9:45	24.17	329.64	276.58	389.51	621.95	454.95	420.85	431.28	418.88	473.37		396.62
10/16/06 10:00	24.17	329.63	276.58	389.44	621.94	454.94	420.87	431.28	418.87	473.38		396.62
10/16/06 10:15	24.17	329.63	276.58	389.33	621.94	454.94	420.87	431.28	418.87	473.38		396.62
10/16/06 10:30	24.16	329.63	276.57	389.44	621.93	454.94	420.88	431.28	418.87	473.38		396.61
10/16/06 10:45	24.15	329.62	276.56	389.44	621.93	454.94	420.89	431.28	418.87	473.38		396.60

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
10/16/06 11:00	24.15	329.62	276.56	389.46	621.92	454.94	420.90	431.27	418.87	473.38		396.60
10/16/06 11:15	24.14	329.62	276.56	389.46	621.91	454.93	420.90	431.27	418.86	473.39		396.59
10/16/06 11:30	24.14	329.61	276.55	389.41	621.91	454.93	420.89	431.27	418.86	473.38		396.59
10/16/06 11:45	24.13	329.60	276.56	389.41	621.91	454.92	420.89	431.27	418.86	473.39		396.58
10/16/06 12:00	24.13	329.60	276.55	389.39	621.90	454.92	420.89	431.26	418.86	473.39		396.57
10/16/06 12:15	24.12	329.60	276.55	389.39	621.89	454.91	420.88	431.26	418.85	473.39		396.57
10/16/06 12:30	24.12	329.60	276.55	389.36	621.88	454.92	420.89	431.26	418.85	473.40		396.57
10/16/06 12:45	24.12	329.59	276.54	389.30	621.87	454.91	420.88	431.25	418.84	473.39		396.57
10/16/06 13:00	24.12	329.59	276.53	389.28	621.87	454.91	420.87	431.25	418.85	473.39		396.57
10/16/06 13:15	24.11	329.59	276.55	389.23	621.87	454.92	420.89	431.25	418.84	473.39		396.56
10/16/06 13:30	24.10	329.58	276.52	389.21	621.86	454.90	420.86	431.23	418.84	473.39		396.55
10/16/06 13:45	24.10	329.57	276.53	389.18	621.85	454.91	420.81	431.24	418.84	473.39		396.55
10/16/06 14:00	24.09	329.57	276.52	389.18	621.84	454.89	420.81	431.23	418.83	473.36		396.54
10/16/06 14:15	24.08	329.56	276.53	389.21	621.83	454.89	420.81	431.23	418.83	473.35		396.53
10/16/06 14:30	24.07	329.56	276.51	389.15	621.82	454.88	420.85	431.23	418.83	473.35		396.53
10/16/06 14:45	24.07	329.56	276.50	389.11	621.82	454.88	420.84	431.23	418.83	473.34		396.52
10/16/06 15:00	24.06	329.55	276.49	389.15	621.82	454.87	420.84	431.22	418.82	473.34		396.52
10/16/06 15:15	24.06	329.54	276.49	389.18	621.81	454.89	420.82	431.21	418.83	473.33		396.51
10/16/06 15:30	24.07	329.54	276.50	389.16	621.81	454.86	420.79	431.21	418.81	473.33		396.51
10/16/06 15:45	24.07	329.54	276.50	389.16	621.80	454.88	420.77	431.23	418.81	473.33		396.52
10/16/06 16:00	24.08	329.55	276.51	389.18	621.81	454.87	420.78	431.22	418.81	473.32		396.52
10/16/06 16:15	24.08	329.55	276.51	389.16	621.80	454.89	420.78	431.23	418.82	473.32		396.51
10/16/06 16:30	24.09	329.54	276.51	389.16	621.80	454.88	420.80	431.22	418.82	473.32		396.52
10/16/06 16:45	24.09	329.55	276.51	389.13	621.80	454.88	420.77	431.22	418.82	473.31		396.52
10/16/06 17:00	24.09	329.53	276.51	389.10	621.79	454.88	420.78	431.23	418.82	473.31		396.52
10/16/06 17:15	24.10	329.54	276.52	389.10	621.79	454.89	420.77	431.24	418.82	473.31		396.52
10/16/06 17:30	24.11	329.54	276.52	389.06	621.80	454.90	420.79	431.24	418.83	473.30		396.52
10/16/06 17:45	24.11	329.54	276.52	389.05	621.79	454.89	420.77	431.23	418.83	473.30		396.52
10/16/06 18:00	24.12	329.55	276.52	389.05	621.79	454.90	420.77	431.24	418.83	473.30		396.51
10/16/06 18:15	24.13	329.55	276.52	389.05	621.79	454.90	420.78	431.24	418.83	473.29		396.52
10/16/06 18:30	24.14	329.55	276.53	389.05	621.79	454.90	420.78	431.25	418.84	473.29		396.52
10/16/06 18:45	24.15	329.56	276.53	389.05	621.79	454.91	420.79	431.25	418.84	473.29		396.52
10/16/06 19:00	24.17	329.56	276.54	389.03	621.79	454.92	420.80	431.26	418.85	473.28		396.52
10/16/06 19:15	24.18	329.56	276.55	389.03	621.80	454.92	420.79	431.26	418.85	473.27		396.53
10/16/06 19:30	24.19	329.57	276.55	389.00	621.80	454.93	420.78	431.27	418.86	473.27		396.53
10/16/06 19:45	24.20	329.57	276.55	389.02	621.79	454.93	420.80	431.27	418.86	473.26		396.53
10/16/06 20:00	24.21	329.58	276.56	389.00	621.79	454.94	420.81	431.28	418.87	473.25		396.54
10/16/06 20:15	24.22	329.59	276.57	389.00	621.79	454.94	420.82	431.28	418.86	473.26		396.55
10/16/06 20:30	24.24	329.59	276.58	389.08	621.79	454.95	420.82	431.29	418.87	473.24		396.55
10/16/06 20:45	24.25	329.60	276.58	389.02	621.79	454.95	420.82	431.29	418.88	473.24		396.56
10/16/06 21:00	24.25	329.60	276.58	389.00	621.80	454.96	420.82	431.31	418.88	473.24		396.55
10/16/06 21:15	24.26	329.60	276.59	389.02	621.80	454.96	420.83	431.31	418.89	473.24		396.57
10/16/06 21:30	24.27	329.60	276.60	389.02	621.80	454.97	420.84	431.31	418.90	473.23		396.57
10/16/06 21:45	24.28	329.60	276.60	389.02	621.79	454.97	420.84	431.31	418.89	473.23		396.57
10/16/06 22:00	24.28	329.61	276.60	389.00	621.81	454.98	420.84	431.31	418.90	473.22		396.57
10/16/06 22:15	24.29	329.61	276.61	388.98	621.81	454.97	420.86	431.32	418.91	473.22		396.57
10/16/06 22:30	24.30	329.61	276.61	389.00	621.80	454.98	420.85	431.32	418.91	473.22		396.57
10/16/06 22:45	24.31	329.62	276.61	389.02	621.80	454.99	420.86	431.33	418.91	473.22		396.57
10/16/06 23:00	24.31	329.62	276.61	388.97	621.80	454.98	420.87	431.34	418.91	473.21		396.59
10/16/06 23:15	24.32	329.62	276.61	388.95	621.80	455.00	420.87	431.34	418.91	473.21		396.58
10/16/06 23:30	24.33	329.62	276.62	388.98	621.80	455.00	420.87	431.34	418.92	473.19		396.59
10/16/06 23:45	24.34	329.62	276.63	388.95	621.81	455.00	420.88	431.34	418.92	473.19		396.58
10/17/06 0:00	24.35	329.63	276.63	388.98	621.81	455.01	420.88	431.35	418.93	473.18		396.58
10/17/06 0:15	24.36	329.63	276.64	388.93	621.81	455.01	420.88	431.36	418.93	473.18		396.59
10/17/06 0:30	24.37	329.63	276.64	388.95	621.81	455.01	420.89	431.36	418.93	473.17		396.59
10/17/06 0:45	24.37	329.63	276.64	388.93	621.81	455.01	420.89	431.36	418.93	473.17		396.60
10/17/06 1:00	24.37	329.63	276.63	388.92	621.80	455.02	420.88	431.35	418.93	473.17		396.59
10/17/06 1:15	24.37	329.63	276.64	388.92	621.80	455.02	420.88	431.36	418.93	473.17		396.58
10/17/06 1:30	24.38	329.63	276.63	388.92	621.79	455.02	420.88	431.35	418.93	473.17		396.59
10/17/06 1:45	24.39	329.62	276.64	388.90	621.79	455.02	420.89	431.36	418.93	473.16		396.57
10/17/06 2:00	24.39	329.63	276.64	388.88	621.79	455.02	420.89	431.36	418.94	473.17		396.58
10/17/06 2:15	24.39	329.62	276.64	388.90	621.79	455.02	420.89	431.36	418.93	473.18		396.58
10/17/06 2:30	24.39	329.62	276.64	388.87	621.78	455.02	420.89	431.36	418.93	473.19		396.57
10/17/06 2:45	24.41	329.62	276.64	388.83	621.78	455.02	420.88	431.36	418.93	473.18		396.57
10/17/06 3:00	24.41	329.62	276.64	388.85	621.79	455.02	420.89	431.36	418.94	473.19		396.57
10/17/06 3:15	24.41	329.63	276.64	388.88	621.79	455.03	420.90	431.36	418.94	473.19		396.57
10/17/06 3:30	24.42	329.62	276.64	388.88	621.78	455.03	420.89	431.36	418.94	473.19		396.57
10/17/06 3:45	24.43	329.63	276.66	388.87	621.79	455.03	420.90	431.37	418.95	473.18		396.57
10/17/06 4:00	24.41	329.62	276.64	388.90	621.78	455.03	420.92	431.36	418.94	473.20		396.58
10/17/06 4:15	24.42	329.62	276.64	388.88	621.77	455.02	420.91	431.36	418.94	473.19		396.57
10/17/06 4:30	24.42	329.62	276.65	388.90	621.77	455.03	420.90	431.36	418.94	473.19		396.57
10/17/06 4:45	24.43	329.62	276.65	388.88	621.77	455.03	420.90	431.37	418.94	473.18		396.57
10/17/06 5:00	24.43	329.62	276.66	388.93	621.77	455.03	420.90	431.37	418.95	473.18		396.57
10/17/06 5:15	24.43	329.62	276.65	388.90	621.77	455.04	420.91	431.37	418.95	473.18		396.57
10/17/06 5:30	24.44	329.63	276.66	388.95	621.77	455.04	420.90	431.37	418.94	473.18		396.57
10/17/06 5:45	24.44	329.63	276.66	388.92	621.77	455.04	420.91	431.39	418.95	473.18		396.57
10/17/06 6:00	24.44	329.63	276.66	388.93	621.76	455.04	420.91	431.39	418.95	473.17		396.56
10/17/06 6:15	24.45	329.64	276.67	388.92	621.77	455.05	420.91	431.39	418.95	473.17		396.57
10/17/06 6:30	24.45	329.63	276.67	388.95	621.76	455.05	420.91	431.39	418.96	473.17		396.57
10/17/06 6:45	24.46	329.64	276.67	388.92	621.76	455.05	420.92	431.39	418.96	473.17		396.57
10/17/06 7:00	24.46	329.64	276.67	388.95	621.77	455.05	420.93	431.39	418.96	473.18		396.57
10/17/06 7:15	24.46	329.64	276.67	388.93	621.76	455.05	420.93	431.40	418.96	473.18		396.57
10/17/06 7:30	24.46	329.63	276.67	388.93	621.77	455.05	420.92	431.40	418.97	473.18		396.56
10/17/06 7:45	24.47	329.64	276.68	389.02	621.77	455.06	420.93	431.40	418.97	473.17		396.57
10/17/06 8:00	24.48	329.64	276.68	388.97	621.77	455.07	420.94	431.41	418.98	473.24		396.57
10/17/06 8:15	24.48	329.64	276.68	389.03	621.77	455.07	420.94	431.42	418.98	473.25		396.57
10/17/06 8:30	24.47	329.64	276.68	389.02	621.78	455.07	420.95	431.41	418.98	473.26		396.57
10/17/06 8:45	24.47	329.64	276.68	389.03	621.77	455.07	420.95	431.41	418.98	473.26		396.57
10/17/06 9:00	24.48	329.64	276.69	388.98	621.76	455.07	420.95	431.42	418.98	473.26		396.57
10/17/06 9:15	24.49	329.65	276.69	389.02	621.77	455.08	420.94	431.42	418.99	473.26		396.57
10/17/06 9:30	24.50	329.66	276.70	389.05	621.77	455.09	420.95	431.42	418.99	473.25		396.57
10/17/06 9:45	24.50	329.66	276.70	388.98	621.77	455.09	420.95	431.43	418.99	473.25		396.58
10/17/06 10:00	24.50	329.66	276.70	389.00	621.77	455.09	420.96	431.43	419.00	473.26		396.57
10/17/06 10:15	24.48	329.65	276.70	388.98	621.76	455.09	420.98	431.43	418.99	473.27		396.57
10/17/06 10:30	24.47	329.65	276.69	389.03	621.75	455.08	421.00	431.42	418.99	473.28		396.57
10/17/06 10:45	24.47	329.64	276.69	388.98	621.75	455.08	420.99	431.42	418.99	473.27		396.57
10/17/06 11:00	24.48	329.65	276.70	389.00	621.75	455.09	420.98	431.43	418.99	473.26		396.56
10/17/06 11:15	24.49	329.64	276.70	389.02	621.75	455.08	420.98	431.43	418.99	473.26		396.58
10/17/06 11:30	24.49	329.64	276.70	389.00	621.75	455.09	420.98	431.43	418.99	473.26		396.58
10/17/06 11:45	24.50	329.64	276.70	389.03	621.75	455.09	420.98	431.43	418.99	473.25		396.58

Power Resources, Inc.
Regional Southwest Area Aquifer Tests
Appendix D-1.- 15-minute Depth to Water Data (All Monitoring Wells)

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
10/17/06 12:00	24.50	329.64	276.70	389.00	621.75	455.09	420.97	431.43	418.99	473.25		396.59
10/17/06 12:15	24.49	329.64	276.69	389.03	621.74	455.09	420.97	431.43	418.99	473.25		396.57
10/17/06 12:30	24.50	329.64	276.69	389.02	621.73	455.09	420.96	431.43	418.99	473.25		396.57
10/17/06 12:45	24.50	329.64	276.70	389.08	621.73	455.09	420.96	431.43	418.99	473.25		396.57
10/17/06 13:00	24.49	329.64	276.69	389.02	621.73	455.08	420.98	431.42	418.99	473.26		396.56
10/17/06 13:15	24.49	329.63	276.68	389.02	621.72	455.07	420.98	431.42	418.98	473.25		396.55
10/17/06 13:30	24.48	329.62	276.68	388.98	621.71	455.07	420.96	431.42	418.98	473.25		396.56
10/17/06 13:45	24.49	329.62	276.68	389.02	621.71	455.07	420.96	431.42	418.98	473.25		396.55
10/17/06 14:00	24.49	329.62	276.69	389.00	621.70	455.07	420.95	431.42	418.98	473.24		396.55
10/17/06 14:15	24.50	329.62	276.69	389.03	621.71	455.08	420.94	431.42	418.98	473.23		396.55
10/17/06 14:30	24.51	329.62	276.68	389.00	621.70	455.07	420.94	431.42	418.98	473.23		396.54
10/17/06 14:45	24.51	329.62	276.68	389.06	621.69	455.07	420.94	431.42	418.98	473.23		396.55
10/17/06 15:00	24.51	329.62	276.68	389.00	621.69	455.07	420.94	431.42	418.98	473.22		396.55
10/17/06 15:15	24.51	329.62	276.68	389.05	621.69	455.07	420.94	431.42	418.97	473.22		396.55
10/17/06 15:30	24.51	329.62	276.68	389.02	621.68	455.07	420.94	431.42	418.98	473.22		396.54
10/17/06 15:45	24.52	329.62	276.68	389.05	621.69	455.07	420.94	431.42	418.98	473.21		396.53
10/17/06 16:00	24.52	329.61	276.68	389.06	621.68	455.07	420.93	431.41	418.98	473.21		396.54
10/17/06 16:15	24.52	329.61	276.68	389.02	621.68	455.07	420.94	431.41	418.98	473.21		396.53
10/17/06 16:30	24.53	329.61	276.69	389.06	621.68	455.07	420.93	431.41	418.98	473.20		396.52
10/17/06 16:45	24.55	329.61	276.69	389.06	621.69	455.08	420.94	431.42	418.98	473.23		396.52
10/17/06 17:00	24.55	329.61	276.68	389.00	621.68	455.08	420.94	431.42	418.99	473.26		396.54
10/17/06 17:15	24.55	329.62	276.69	389.03	621.68	455.08	420.94	431.42	418.99	473.26		396.53
10/17/06 17:30	24.55	329.61	276.69	389.05	621.68	455.09	420.94	431.42	418.99	473.26		396.53
10/17/06 17:45	24.56	329.61	276.70	389.08	621.68	455.09	420.94	431.43	418.99	473.26		396.53
10/17/06 18:00	24.56	329.62	276.70	389.05	621.68	455.09	420.95	431.43	418.99	473.25		396.53
10/17/06 18:15	24.57	329.62	276.70	389.05	621.68	455.10	420.95	431.44	419.00	473.25		396.53
10/17/06 18:30	24.57	329.62	276.70	389.05	621.68	455.10	420.96	431.44	419.00	473.25		396.55
10/17/06 18:45	24.58	329.63	276.71	389.05	621.68	455.10	420.96	431.44	419.00	473.24		396.54
10/17/06 19:00	24.58	329.63	276.71	389.02	621.68	455.11	420.96	431.44	419.00	473.24		396.54
10/17/06 19:15	24.60	329.63	276.72	389.03	621.68	455.11	420.96	431.46	419.01	473.24		396.56
10/17/06 19:30	24.59	329.63	276.72	389.06	621.68	455.11	420.97	431.46	419.01	473.25		396.56
10/17/06 19:45	24.60	329.64	276.72	389.10	621.68	455.12	420.97	431.47	419.02	473.26		396.55
10/17/06 20:00	24.60	329.63	276.72	389.06	621.68	455.12	420.97	431.46	419.01	473.27		396.56
10/17/06 20:15	24.60	329.63	276.72	389.08	621.68	455.12	420.97	431.47	419.02	473.29		396.56
10/17/06 20:30	24.60	329.64	276.73	389.08	621.69	455.13	420.96	431.47	419.02	473.30		396.56
10/17/06 20:45	24.60	329.64	276.73	389.10	621.68	455.13	420.97	431.47	419.02	473.30		396.57
10/17/06 21:00	24.61	329.64	276.73	389.11	621.68	455.13	420.97	431.47	419.02	473.30		396.57
10/17/06 21:15	24.61	329.64	276.73	389.16	621.69	455.13	420.97	431.47	419.03	473.30		396.57
10/17/06 21:30	24.61	329.64	276.74	389.05	621.68	455.14	420.97	431.48	419.03	473.30		396.57
10/17/06 21:45	24.62	329.64	276.74	389.00	621.69	455.13	420.97	431.48	419.03	473.30		396.57
10/17/06 22:00	24.62	329.64	276.74	389.03	621.68	455.14	420.97	431.48	419.03	473.30		396.57
10/17/06 22:15	24.62	329.64	276.74	389.02	621.68	455.14	420.96	431.48	419.03	473.30		396.57
10/17/06 22:30	24.63	329.64	276.74	389.18	621.69	455.14	420.96	431.49	419.04	473.30		396.57
10/17/06 22:45	24.63	329.64	276.75	389.15	621.69	455.15	420.96	431.49	419.04	473.29		396.57
10/17/06 23:00	24.63	329.65	276.75	389.11	621.68	455.15	420.96	431.49	419.04	473.29		396.58
10/17/06 23:15	24.64	329.65	276.75	389.03	621.68	455.15	420.96	431.50	419.04	473.29		396.57
10/17/06 23:30	24.64	329.64	276.75	389.11	621.68	455.15	420.96	431.49	419.04	473.29		396.58
10/17/06 23:45	24.64	329.64	276.75	389.21	621.68	455.15	420.97	431.50	419.05	473.29		396.58
10/18/06 0:00	24.64	329.64	276.75	389.13	621.67	455.15	420.97	431.49	419.04	473.29		396.57
10/18/06 0:15	24.64	329.64	276.75	389.10	621.67	455.15	420.97	431.49	419.04	473.29		396.57
10/18/06 0:30	24.65	329.64	276.75	389.11	621.67	455.15	420.97	431.49	419.04	473.29		396.57
10/18/06 0:45	24.64	329.64	276.74	389.10	621.66	455.15	420.97	431.49	419.04	473.28		396.57
10/18/06 1:00	24.64	329.64	276.74	389.11	621.66	455.15	420.97	431.49	419.04	473.29		396.56
10/18/06 1:15	24.64	329.63	276.74	389.13	621.65	455.15	420.97	431.48	419.04	473.28		396.57
10/18/06 1:30	24.65	329.63	276.74	389.08	621.65	455.15	420.97	431.48	419.04	473.28		396.56
10/18/06 1:45	24.64	329.63	276.74	389.10	621.65	455.14	420.97	431.48	419.03	473.28		396.56
10/18/06 2:00	24.64	329.62	276.74	389.10	621.64	455.14	420.97	431.48	419.03	473.28		396.56
10/18/06 2:15	24.64	329.62	276.74	389.10	621.64	455.14	420.96	431.48	419.03	473.27		396.56
10/18/06 2:30	24.65	329.62	276.74	389.02	621.63	455.14	420.96	431.48	419.03	473.27		396.55
10/18/06 2:45	24.65	329.62	276.73	389.10	621.63	455.14	420.96	431.47	419.03	473.27		396.55
10/18/06 3:00	24.65	329.62	276.73	389.15	621.63	455.14	420.96	431.47	419.03	473.26		396.55
10/18/06 3:15	24.65	329.62	276.73	389.13	621.63	455.13	420.96	431.47	419.03	473.26		396.54
10/18/06 3:30	24.64	329.61	276.72	389.11	621.62	455.13	420.96	431.47	419.02	473.26		396.54
10/18/06 3:45	24.64	329.60	276.72	389.11	621.62	455.13	420.96	431.47	419.02	473.26		396.54
10/18/06 4:00	24.64	329.60	276.72	389.10	621.61	455.13	420.96	431.47	419.02	473.26		396.52
10/18/06 4:15	24.64	329.60	276.72	389.08	621.61	455.13	420.96	431.47	419.02	473.26		396.52
10/18/06 4:30	24.64	329.60	276.72	389.11	621.61	455.13	420.96	431.47	419.02	473.26		396.52
10/18/06 4:45	24.64	329.60	276.72	389.10	621.60	455.12	420.95	431.47	419.02	473.26		396.52
10/18/06 5:00	24.64	329.60	276.72	389.16	621.60	455.13	420.96	431.47	419.02	473.26		396.52
10/18/06 5:15	24.64	329.59	276.72	389.13	621.60	455.12	420.96	431.47	419.02	473.26		396.52
10/18/06 5:30	24.65	329.59	276.72	389.11	621.60	455.13	420.95	431.47	419.02	473.26		396.52
10/18/06 5:45	24.65	329.59	276.72	389.08	621.60	455.13	420.95	431.47	419.02	473.26		396.52
10/18/06 6:00	24.64	329.59	276.72	389.10	621.59	455.13	420.95	431.47	419.02	473.26		396.52
10/18/06 6:15	24.64	329.59	276.72	389.06	621.59	455.13	420.96	431.47	419.02	473.26		396.52
10/18/06 6:30	24.64	329.59	276.72	389.06	621.59	455.13	420.96	431.47	419.02	473.26		396.52
10/18/06 6:45	24.64	329.59	276.72	389.10	621.59	455.13	420.96	431.47	419.02	473.26		396.52
10/18/06 7:00	24.64	329.59	276.72	389.15	621.59	455.13	420.95	431.47	419.03	473.27		396.51
10/18/06 7:15	24.64	329.59	276.72	389.15	621.59	455.13	420.96	431.47	419.02	473.27		396.52
10/18/06 7:30	24.63	329.59	276.72	389.18	621.59	455.13	420.96	431.47	419.02	473.27		396.52
10/18/06 7:45	24.64	329.59	276.72	389.18	621.59	455.13	420.96	431.47	419.03	473.27		396.54
10/18/06 8:00	24.64	329.59	276.73	389.08	621.59	455.13	420.95	431.48	419.03	473.27		396.54
10/18/06 8:15	24.65	329.60	276.74	389.21	621.59	455.14	420.95	431.49	419.03	473.27		396.55
10/18/06 8:30	24.65	329.60	276.73	389.51	621.59	455.15	420.97	431.49	419.03	473.27		396.53
10/18/06 8:45	24.65	329.60	276.74	389.39	621.59	455.15	420.98	431.50	419.04	473.27		396.49
10/18/06 9:00	24.66	329.60	276.74	389.44	621.59	455.15	420.99	431.50	419.04	473.27		396.49
10/18/06 9:15	24.66	329.60	276.74	389.44	621.59	455.15	421.00	431.50	419.05	473.27		396.50
10/18/06 9:30	24.65	329.61	276.74	389.41	621.59	455.16	421.01	431.50	419.05	473.28		396.50
10/18/06 9:45	24.66	329.60	276.75	389.25	621.59	455.16	421.01	431.50	419.05	473.28		396.52
10/18/06 10:00	24.66	329.60	276.75	389.20	621.59	455.16	421.02	431.50	419.05	473.33		396.52
10/18/06 10:15	24.65	329.61	276.75	389.21	621.59	455.16	421.03	431.50	419.05	473.35		396.52
10/18/06 10:30	24.65	329.60	276.74	389.16	621.58	455.16	421.04	431.50	419.04	473.35		396.52
10/18/06 10:45	24.64	329.60	276.75	389.15	621.58	455.16	421.05	431.50	419.05	473.35		396.52
10/18/06 11:00	24.64	329.60	276.74	389.20	621.58	455.16	421.06	431.50	419.05	473.36		396.52
10/18/06 11:15	24.64	329.60	276.74	389.30	621.57	455.16	421.07	431.50	419.05	473.35		396.51
10/18/06 11:30	24.63	329.60	276.74	389.31	621.57	455.16	421.07	431.50	419.05	473.36		396.50
10/18/06 11:45	24.63	329.59	276.73	389.23	621.57	455.16	421.09	431.49	419.05	473.36		396.51
10/18/06 12:00	24.63	329.59	276.74	389.10	621.56	455.15	421.09	431.49	419.04	473.36		396.50
10/18/06 12:15	24.62	329.59	276.73	389.13	621.56	455.15	421.10	431.50	419.05	473.36		396.50
10/18/06 12:30	24.62	329.58	276.73	389.10	621.56	455.15	421.10	431.49	419.03	473.36		396.49
10/18/06 12:45	24.61	329.58	276.72	389.06	621.56	455.15	421.09	431.48	419.04	473.37		396.49

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
10/18/06 13:00	24.61	329.58	276.72	389.08	621.55	455.15	421.08	431.48	419.04	473.37		396.48
10/18/06 13:15	24.61	329.57	276.72	389.10	621.54	455.14	421.07	431.48	419.02	473.37		396.48
10/18/06 13:30	24.60	329.57	276.71	389.06	621.53	455.13	421.06	431.47	419.03	473.37		396.48
10/18/06 13:45	24.60	329.56	276.71	389.05	621.53	455.12	421.03	431.47	419.01	473.38		396.48
10/18/06 14:00	24.59	329.55	276.70	389.05	621.52	455.13	421.05	431.47	419.01	473.37		396.47
10/18/06 14:15	24.58	329.55	276.70	389.03	621.52	455.12	421.04	431.46	419.01	473.38		396.46
10/18/06 14:30	24.58	329.55	276.71	389.03	621.50	455.12	421.04	431.45	419.01	473.38		396.44
10/18/06 14:45	24.57	329.53	276.69	389.03	621.51	455.11	421.05	431.44	419.00	473.38		396.44
10/18/06 15:00	24.57	329.53	276.68	389.00	621.50	455.11	421.04	431.44	419.01	473.38		396.43
10/18/06 15:15	24.56	329.52	276.69	389.00	621.49	455.11	421.05	431.44	419.01	473.38		396.43
10/18/06 15:30	24.56	329.53	276.68	389.00	621.49	455.10	421.05	431.44	419.00	473.38		396.42
10/18/06 15:45	24.56	329.52	276.67	389.00	621.48	455.10	421.05	431.43	418.99	473.38		396.42
10/18/06 16:00	24.55	329.51	276.67	389.00	621.47	455.09	421.04	431.43	419.00	473.38		396.43
10/18/06 16:15	24.55	329.51	276.67	389.02	621.47	455.09	421.04	431.43	418.99	473.38		396.42
10/18/06 16:30	24.55	329.51	276.68	389.02	621.48	455.09	421.02	431.42	418.99	473.38		396.41
10/18/06 16:45	24.55	329.51	276.67	389.03	621.46	455.09	421.03	431.43	418.99	473.38		396.42
10/18/06 17:00	24.55	329.50	276.66	389.02	621.46	455.09	421.01	431.42	418.98	473.38		396.40
10/18/06 17:15	24.55	329.50	276.66	389.02	621.46	455.09	421.01	431.42	418.99	473.38		396.41
10/18/06 17:30	24.55	329.49	276.67	389.03	621.46	455.09	421.01	431.42	418.98	473.38		396.41
10/18/06 17:45	24.55	329.49	276.66	389.02	621.46	455.08	421.00	431.42	418.98	473.38		396.41
10/18/06 18:00	24.55	329.49	276.67	389.02	621.45	455.09	420.99	431.42	418.98	473.38		396.40
10/18/06 18:15	24.55	329.50	276.67	389.05	621.45	455.09	420.97	431.42	418.98	473.38		396.41
10/18/06 18:30	24.56	329.50	276.67	389.06	621.45	455.09	420.97	431.42	418.98	473.38		396.42
10/18/06 18:45	24.56	329.50	276.67	389.05	621.45	455.09	420.97	431.42	418.99	473.38		396.41
10/18/06 19:00	24.56	329.50	276.67	389.06	621.45	455.09	420.97	431.42	418.99	473.38		396.41
10/18/06 19:15	24.56	329.50	276.68	389.05	621.45	455.09	420.96	431.43	418.99	473.38		396.41
10/18/06 19:30	24.56	329.50	276.68	389.06	621.45	455.09	420.96	431.43	418.99	473.38		396.42
10/18/06 19:45	24.55	329.50	276.68	389.05	621.45	455.09	420.96	431.43	418.99	473.39		396.42
10/18/06 20:00	24.56	329.50	276.68	389.05	621.45	455.10	420.96	431.44	418.99	473.39		396.41
10/18/06 20:15	24.55	329.50	276.68	389.03	621.45	455.10	420.96	431.44	418.99	473.39		396.42
10/18/06 20:30	24.55	329.50	276.68	389.03	621.45	455.10	420.97	431.43	418.99	473.39		396.42
10/18/06 20:45	24.55	329.50	276.68	389.03	621.45	455.10	420.97	431.44	418.99	473.40		396.41
10/18/06 21:00	24.55	329.50	276.68	389.03	621.44	455.10	420.97	431.44	419.00	473.40		396.42
10/18/06 21:15	24.55	329.50	276.69	389.03	621.44	455.10	420.97	431.44	419.00	473.40		396.42
10/18/06 21:30	24.55	329.50	276.69	389.03	621.45	455.11	420.98	431.44	419.00	473.41		396.41
10/18/06 21:45	24.55	329.50	276.68	389.03	621.45	455.11	420.97	431.44	419.00	473.40		396.42
10/18/06 22:00	24.55	329.51	276.69	389.05	621.45	455.11	420.98	431.45	419.00	473.41		396.42
10/18/06 22:15	24.55	329.50	276.69	389.06	621.44	455.11	420.98	431.45	419.00	473.41		396.42
10/18/06 22:30	24.55	329.50	276.69	389.06	621.44	455.11	420.98	431.45	419.00	473.41		396.41
10/18/06 22:45	24.55	329.50	276.69	389.05	621.44	455.11	420.98	431.44	419.00	473.42		396.42
10/18/06 23:00	24.54	329.50	276.69	389.03	621.43	455.11	420.99	431.44	419.00	473.42		396.42
10/18/06 23:15	24.55	329.49	276.69	389.03	621.43	455.11	420.99	431.44	419.00	473.42		396.41
10/18/06 23:30	24.54	329.49	276.69	389.06	621.43	455.11	420.99	431.44	419.00	473.42		396.41
10/18/06 23:45	24.54	329.49	276.69	389.03	621.43	455.11	421.00	431.44	419.00	473.43		396.40
10/19/06 0:00	24.54	329.49	276.69	389.05	621.42	455.11	421.00	431.44	419.00	473.42		396.40
10/19/06 0:15	24.53	329.49	276.68	389.06	621.42	455.10	421.01	431.44	419.00	473.43		396.40
10/19/06 0:30	24.53	329.48	276.68	389.03	621.41	455.10	421.01	431.44	418.99	473.43		396.40
10/19/06 0:45	24.53	329.49	276.68	389.05	621.41	455.10	421.01	431.43	419.00	473.42		396.38
10/19/06 1:00	24.53	329.48	276.68	389.05	621.41	455.10	421.01	431.43	418.99	473.42		396.38
10/19/06 1:15	24.54	329.48	276.68	389.03	621.41	455.10	421.01	431.43	418.99	473.41		396.39
10/19/06 1:30	24.55	329.48	276.68	389.02	621.40	455.10	421.00	431.44	418.99	473.41		396.39
10/19/06 1:45	24.54	329.47	276.68	389.02	621.40	455.10	421.00	431.44	418.99	473.41		396.39
10/19/06 2:00	24.54	329.47	276.68	389.02	621.39	455.10	421.00	431.42	418.99	473.41		396.38
10/19/06 2:15	24.54	329.47	276.67	388.98	621.39	455.09	421.00	431.42	418.99	473.40		396.38
10/19/06 2:30	24.54	329.47	276.67	389.00	621.39	455.09	421.00	431.42	418.99	473.40		396.38
10/19/06 2:45	24.55	329.47	276.67	389.02	621.39	455.09	420.99	431.43	418.98	473.39		396.38
10/19/06 3:00	24.56	329.47	276.67	389.02	621.38	455.10	420.99	431.43	418.99	473.39		396.37
10/19/06 3:15	24.56	329.47	276.67	389.03	621.38	455.10	420.99	431.42	418.98	473.38		396.37
10/19/06 3:30	24.55	329.46	276.67	389.05	621.37	455.09	420.98	431.42	418.97	473.38		396.37
10/19/06 3:45	24.55	329.46	276.67	389.05	621.37	455.09	420.98	431.42	418.98	473.38		396.36
10/19/06 4:00	24.57	329.46	276.67	389.05	621.37	455.09	420.97	431.42	418.98	473.37		396.36
10/19/06 4:15	24.57	329.46	276.67	389.08	621.37	455.09	420.97	431.42	418.98	473.37		396.37
10/19/06 4:30	24.56	329.46	276.66	389.05	621.36	455.09	420.97	431.42	418.98	473.37		396.34
10/19/06 4:45	24.56	329.45	276.66	389.05	621.36	455.09	420.97	431.42	418.98	473.37		396.36
10/19/06 5:00	24.57	329.45	276.66	389.10	621.35	455.09	420.96	431.42	418.98	473.37		396.36
10/19/06 5:15	24.57	329.45	276.66	389.06	621.36	455.09	420.96	431.42	418.98	473.36		396.35
10/19/06 5:30	24.57	329.45	276.66	389.06	621.36	455.09	420.95	431.42	418.98	473.36		396.35
10/19/06 5:45	24.57	329.45	276.66	389.06	621.35	455.09	420.95	431.42	418.98	473.36		396.35
10/19/06 6:00	24.58	329.45	276.67	389.10	621.35	455.09	420.95	431.42	418.98	473.35		396.35
10/19/06 6:15	24.58	329.45	276.67	389.06	621.35	455.09	420.95	431.42	418.98	473.35		396.36
10/19/06 6:30	24.58	329.45	276.67	389.03	621.35	455.09	420.95	431.42	418.98	473.35		396.35
10/19/06 6:45	24.58	329.45	276.67	389.03	621.35	455.09	420.95	431.43	418.98	473.36		396.34
10/19/06 7:00	24.58	329.45	276.67	389.06	621.35	455.10	420.96	431.43	418.98	473.35		396.35
10/19/06 7:15	24.58	329.45	276.68	389.00	621.35	455.09	420.97	431.43	418.99	473.36		396.35
10/19/06 7:30	24.59	329.45	276.68	389.03	621.35	455.10	420.97	431.43	418.99	473.35		396.35
10/19/06 7:45	24.59	329.45	276.68	389.05	621.35	455.11	420.97	431.43	418.99	473.36		396.36
10/19/06 8:00	24.59	329.46	276.69	389.02	621.35	455.11	420.97	431.44	418.99	473.35		396.36
10/19/06 8:15	24.60	329.46	276.69	389.05	621.36	455.11	420.97	431.44	419.00	473.35		396.37
10/19/06 8:30	24.60	329.46	276.69	389.06	621.36	455.12	420.97	431.44	419.00	473.35		396.36
10/19/06 8:45	24.61	329.47	276.70	389.02	621.36	455.12	420.98	431.45	419.01	473.35		396.37
10/19/06 9:00	24.61	329.47	276.70	389.03	621.36	455.13	420.99	431.46	419.01	473.35		396.37
10/19/06 9:15	24.61	329.47	276.70	389.02	621.37	455.13	421.00	431.46	419.01	473.35		396.37
10/19/06 9:30	24.61	329.47	276.70	389.02	621.36	455.13	421.00	431.46	419.01	473.35		396.38
10/19/06 9:45	24.61	329.47	276.72	388.98	621.37	455.14	421.04	431.47	419.01	473.36		396.38
10/19/06 10:00	24.60	329.47	276.71	388.98	621.36	455.13	421.06	431.46	419.01	473.36		396.38
10/19/06 10:15	24.60	329.47	276.70	389.02	621.37	455.14	421.05	431.47	419.02	473.36		396.38
10/19/06 10:30	24.60	329.48	276.70	389.03	621.36	455.14	421.06	431.46	419.02	473.37		396.37
10/19/06 10:45	24.58	329.47	276.71	389.00	621.36	455.14	421.05	431.46	419.02	473.37		396.37
10/19/06 11:00	24.58	329.47	276.70	389.00	621.35	455.14	421.06	431.46	419.02	473.38		396.37
10/19/06 11:15	24.57	329.47	276.70	389.03	621.35	455.13	421.06	431.46	419.02	473.39		396.37
10/19/06 11:30	24.56	329.47	276.70	389.05	621.34	455.13	421.05	431.45	419.01	473.38		396.36
10/19/06 11:45	24.56	329.47	276.70	389.02	621.34	455.13	421.05	431.46	419.02	473.38		396.35
10/19/06 12:00	24.55	329.47	276.69	389.05	621.34	455.13	421.04	431.45	418.99	473.39		396.35
10/19/06 12:15	24.55	329.46	276.70	389.03	621.34	455.12	421.03	431.45	419.01	473.39		396.35
10/19/06 12:30	24.54	329.45	276.70	389.03	621.35	455.14	421.06	431.45	419.01	473.39		396.34
10/19/06 12:45	24.54	329.45	276.70	389.03	621.33	455.12	421.02	431.44	419.01	473.39		396.34
10/19/06 13:00	24.53	329.45	276.68	389.02	621.33	455.13	421.03	431.44	419.01	473.40		396.34
10/19/06 13:15	24.52	329.44	276.68	389.16	621.32	455.11	421.04	431.43	418.99	473.40		396.33
10/19/06 13:30	24.51	329.44	276.68	389.26	621.32	455.10	421.03	431.43	419.00	473.40		396.33
10/19/06 13:45	24.51	329.42	276.67	389.00	621.31	455.10	421.02	431.43	418.99	473.41		396.32

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
10/19/06 14:00	24.50	329.42	276.66	388.98	621.30	455.10	421.02	431.42	418.99	473.41		396.31
10/19/06 14:15	24.49	329.42	276.66	389.06	621.29	455.09	421.02	431.42	418.98	473.41		396.31
10/19/06 14:30	24.49	329.41	276.66	389.05	621.29	455.10	421.02	431.42	418.98	473.41		396.31
10/19/06 14:45	24.48	329.41	276.65	389.02	621.28	455.09	421.00	431.41	418.98	473.42		396.29
10/19/06 15:00	24.48	329.40	276.65	389.02	621.28	455.08	421.01	431.40	418.97	473.41		396.29
10/19/06 15:15	24.48	329.40	276.66	388.95	621.27	455.08	421.01	431.40	418.96	473.42		396.28
10/19/06 15:30	24.47	329.40	276.64	388.98	621.27	455.05	420.97	431.39	418.95	473.41		396.29
10/19/06 15:45	24.47	329.39	276.64	388.98	621.26	455.07	420.95	431.39	418.96	473.41		396.28
10/19/06 16:00	24.47	329.39	276.64	389.05	621.26	455.07	420.94	431.39	418.95	473.41		396.28
10/19/06 16:15	24.47	329.38	276.64	388.97	621.25	455.06	420.94	431.39	418.95	473.41		396.28
10/19/06 16:30	24.47	329.38	276.63	388.93	621.25	455.06	420.93	431.39	418.95	473.41		396.27
10/19/06 16:45	24.47	329.37	276.63	388.98	621.25	455.06	420.93	431.38	418.95	473.41		396.27
10/19/06 17:00	24.47	329.37	276.63	388.92	621.24	455.06	420.93	431.38	418.95	473.41		396.27
10/19/06 17:15	24.47	329.37	276.63	388.92	621.24	455.05	420.93	431.37	418.95	473.42		396.26
10/19/06 17:30	24.47	329.36	276.62	388.90	621.23	455.05	420.93	431.38	418.94	473.42		396.26
10/19/06 17:45	24.46	329.36	276.62	388.92	621.23	455.05	420.93	431.37	418.94	473.42		396.25
10/19/06 18:00	24.46	329.36	276.62	388.93	621.23	455.05	420.93	431.36	418.94	473.42		396.26
10/19/06 18:15	24.46	329.35	276.62	388.92	621.23	455.05	420.92	431.37	418.94	473.42		396.25
10/19/06 18:30	24.45	329.35	276.62	388.90	621.23	455.05	420.92	431.37	418.94	473.43		396.25
10/19/06 18:45	24.45	329.35	276.62	388.93	621.23	455.05	420.93	431.37	418.94	473.43		396.25
10/19/06 19:00	24.45	329.35	276.62	388.93	621.22	455.05	420.93	431.36	418.93	473.43		396.24
10/19/06 19:15	24.44	329.35	276.62	388.90	621.22	455.05	420.93	431.36	418.94	473.44		396.25
10/19/06 19:30	24.44	329.35	276.62	388.90	621.22	455.05	420.92	431.37	418.94	473.44		396.24
10/19/06 19:45	24.44	329.35	276.62	389.02	621.22	455.05	420.92	431.37	418.94	473.44		396.23
10/19/06 20:00	24.45	329.35	276.62	388.90	621.22	455.05	420.93	431.37	418.94	473.45		396.24
10/19/06 20:15	24.44	329.35	276.63	388.88	621.22	455.05	420.93	431.37	418.94	473.45		396.24
10/19/06 20:30	24.44	329.35	276.63	388.95	621.22	455.05	420.93	431.37	418.94	473.45		396.24
10/19/06 20:45	24.44	329.35	276.63	389.03	621.22	455.06	420.93	431.38	418.94	473.46		396.24
10/19/06 21:00	24.45	329.35	276.63	388.95	621.22	455.06	420.94	431.38	418.95	473.46		396.24
10/19/06 21:15	24.44	329.35	276.63	388.90	621.22	455.06	420.95	431.38	418.95	473.47		396.24
10/19/06 21:30	24.43	329.35	276.63	388.93	621.22	455.06	420.95	431.38	418.95	473.47		396.25
10/19/06 21:45	24.44	329.35	276.64	388.93	621.22	455.06	420.95	431.38	418.95	473.47		396.25
10/19/06 22:00	24.44	329.35	276.64	389.03	621.22	455.06	420.95	431.39	418.95	473.47		396.25
10/19/06 22:15	24.43	329.36	276.64	388.95	621.22	455.07	420.96	431.38	418.95	473.48		396.25
10/19/06 22:30	24.43	329.35	276.63	388.95	621.21	455.06	420.97	431.38	418.95	473.48		396.25
10/19/06 22:45	24.43	329.35	276.64	389.00	621.21	455.07	420.97	431.38	418.95	473.48		396.24
10/19/06 23:00	24.42	329.35	276.64	388.92	621.21	455.07	420.97	431.39	418.95	473.49		396.24
10/19/06 23:15	24.42	329.35	276.64	388.92	621.21	455.06	420.99	431.38	418.95	473.49		396.24
10/19/06 23:30	24.41	329.35	276.63	388.90	621.20	455.06	420.99	431.38	418.95	473.50		396.24
10/19/06 23:45	24.41	329.34	276.63	388.90	621.20	455.06	420.99	431.37	418.95	473.50		396.23
10/20/06 0:00	24.40	329.34	276.62	388.90	621.19	455.06	420.99	431.37	418.95	473.50		396.23
10/20/06 0:15	24.39	329.33	276.62	388.88	621.19	455.05	420.99	431.36	418.94	473.51		396.23
10/20/06 0:30	24.39	329.33	276.62	388.88	621.18	455.05	420.99	431.36	418.94	473.51		396.23
10/20/06 0:45	24.38	329.33	276.62	388.88	621.18	455.05	420.99	431.36	418.94	473.51		396.22
10/20/06 1:00	24.38	329.32	276.62	388.88	621.17	455.04	420.98	431.36	418.93	473.51		396.22
10/20/06 1:15	24.37	329.31	276.61	388.92	621.16	455.04	420.98	431.35	418.93	473.52		396.20
10/20/06 1:30	24.37	329.31	276.61	389.02	621.16	455.03	420.97	431.34	418.93	473.52		396.21
10/20/06 1:45	24.37	329.31	276.60	388.95	621.15	455.03	420.97	431.34	418.92	473.52		396.20
10/20/06 2:00	24.36	329.30	276.60	388.88	621.15	455.03	420.97	431.34	418.92	473.52		396.20
10/20/06 2:15	24.36	329.30	276.59	388.92	621.14	455.02	420.97	431.34	418.92	473.51		396.19
10/20/06 2:30	24.36	329.30	276.59	388.88	621.14	455.01	420.96	431.33	418.91	473.51		396.18
10/20/06 2:45	24.36	329.30	276.59	388.88	621.14	455.02	420.96	431.33	418.91	473.50		396.18
10/20/06 3:00	24.36	329.29	276.58	388.92	621.13	455.01	420.95	431.32	418.91	473.50		396.18
10/20/06 3:15	24.36	329.29	276.58	388.87	621.13	455.01	420.95	431.32	418.91	473.50		396.18
10/20/06 3:30	24.35	329.28	276.58	388.87	621.12	455.01	420.94	431.31	418.90	473.50		396.18
10/20/06 3:45	24.34	329.27	276.57	388.87	621.11	455.00	420.95	431.31	418.90	473.50		396.17
10/20/06 4:00	24.34	329.27	276.56	388.85	621.11	455.00	420.93	431.31	418.89	473.49		396.15
10/20/06 4:15	24.33	329.26	276.56	388.87	621.11	454.99	420.94	431.30	418.89	473.49		396.16
10/20/06 4:30	24.32	329.25	276.55	388.83	621.09	454.98	420.92	431.29	418.88	473.49		396.13
10/20/06 4:45	24.32	329.25	276.55	388.83	621.09	454.98	420.93	431.28	418.88	473.49		396.14
10/20/06 5:00	24.31	329.24	276.55	388.82	621.09	454.98	420.93	431.28	418.87	473.49		396.13
10/20/06 5:15	24.31	329.24	276.54	388.83	621.08	454.98	420.91	431.28	418.87	473.49		396.12
10/20/06 5:30	24.30	329.24	276.53	388.83	621.07	454.97	420.91	431.28	418.87	473.50		396.13
10/20/06 5:45	24.30	329.23	276.53	388.82	621.07	454.96	420.91	431.28	418.86	473.49		396.13
10/20/06 6:00	24.30	329.22	276.53	388.80	621.06	454.96	420.90	431.28	418.86	473.48		396.12
10/20/06 6:15	24.30	329.23	276.53	388.78	621.07	454.96	420.91	431.27	418.86	473.48		396.12
10/20/06 6:30	24.30	329.23	276.53	388.80	621.05	454.96	420.91	431.27	418.86	473.47		396.12
10/20/06 6:45	24.31	329.22	276.53	388.83	621.06	454.96	420.90	431.27	418.86	473.46		396.11
10/20/06 7:00	24.30	329.23	276.53	388.88	621.06	454.96	420.91	431.28	418.86	473.47		396.11
10/20/06 7:15	24.31	329.23	276.53	388.83	621.06	454.96	420.90	431.28	418.86	473.47		396.11
10/20/06 7:30	24.30	329.22	276.53	388.78	621.05	454.96	420.90	431.28	418.86	473.47		396.11
10/20/06 7:45	24.30	329.23	276.53	388.78	621.05	454.97	420.90	431.28	418.87	473.47		396.10
10/20/06 8:00	24.30	329.23	276.54	388.78	621.05	454.97	420.90	431.28	418.87	473.47		396.12
10/20/06 8:15	24.30	329.23	276.54	388.83	621.06	454.97	420.91	431.28	418.87	473.47		396.12
10/20/06 8:30	24.31	329.23	276.55	388.80	621.06	454.97	420.91	431.28	418.87	473.47		396.12
10/20/06 8:45	24.31	329.23	276.54	388.90	621.06	454.97	420.90	431.28	418.87	473.47		396.12
10/20/06 9:00	24.31	329.24	276.55	388.80	621.05	454.98	420.90	431.29	418.88	473.47		396.11
10/20/06 9:15	24.31	329.24	276.55	388.82	621.06	454.99	420.93	431.29	418.89	473.48		396.12
10/20/06 9:30	24.32	329.24	276.56	388.83	621.06	454.99	420.93	431.31	418.88	473.47		396.12
10/20/06 9:45	24.32	329.24	276.55	388.78	621.05	455.00	420.94	431.31	418.89	473.47		396.12
10/20/06 10:00	24.33	329.26	276.57	388.90	621.06	454.99	420.89	431.31	418.89	473.46		396.13
10/20/06 10:15	24.33	329.26	276.57	388.80	621.07	454.99	420.87	431.31	418.89	473.46		396.13
10/20/06 10:30	24.34	329.27	276.59	388.80	621.06	455.00	420.87	431.32	418.89	473.46		396.13
10/20/06 10:45	24.35	329.27	276.59	388.77	621.06	455.01	420.88	431.32	418.90	473.46		396.13
10/20/06 11:00	24.36	329.27	276.58	388.82	621.07	455.01	420.88	431.33	418.90	473.45		396.14
10/20/06 11:15	24.36	329.28	276.60	388.82	621.08	455.02	420.89	431.33	418.90	473.46		396.14
10/20/06 11:30	24.36	329.27	276.60	388.82	621.08	455.02	420.89	431.34	418.90	473.46		396.15
10/20/06 11:45	24.36	329.28	276.60	388.83	621.07	455.02	420.90	431.33	418.92	473.45		396.15
10/20/06 12:00	24.37	329.27	276.60	388.83	621.08	455.03	420.93	431.34	418.91	473.46		396.15
10/20/06 12:15	24.37	329.27	276.60	388.83	621.07	455.02	420.94	431.34	418.92	473.45		396.15
10/20/06 12:30	24.36	329.27	276.60	388.88	621.08	455.03	420.92	431.34	418.92	473.45		396.15
10/20/06 12:45	24.37	329.26	276.60	388.93	621.07	455.02	420.93	431.34	418.91	473.45		396.14
10/20/06 13:00	24.36	329.26	276.60	388.82	621.07	455.02	420.92	431.34	418.92	473.45		396.15
10/20/06 13:15	24.37	329.27	276.60	388.88	621.07	455.03	420.91	431.34	418.91	473.44		396.15
10/20/06 13:30	24.37	329.26	276.60	388.90	621.06	455.02	420.90	431.34	418.92	473.44		396.14
10/20/06 13:45	24.38	329.26	276.59	388.90	621.07	455.03	420.90	431.34	418.92	473.44		396.14
10/20/06 14:00	24.38	329.26	276.60	388.88	621.07	455.03	420.90	431.34	418.92	473.44		396.14
10/20/06 14:15	24.39	329.26	276.60	388.92	621.06	455.03	420.89	431.33	418.90	473.43		396.15
10/20/06 14:30	24.39	329.26	276.60	388.85	621.06	455.03	420.90	431.34	418.92	473.42		396.14
10/20/06 14:45	24.39	329.26	276.59	388.87	621.06	455.03	420.90	431.34	418.91	473.42		396.14

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
10/20/06 15:00	24.40	329.26	276.60	388.90	621.05	455.03	420.91	431.33	418.91	473.41		396.13
10/20/06 15:15	24.40	329.25	276.59	388.87	621.05	455.02	420.90	431.34	418.91	473.41		396.13
10/20/06 15:30	24.41	329.26	276.60	388.80	621.05	455.03	420.91	431.34	418.91	473.41		396.13
10/20/06 15:45	24.42	329.26	276.59	388.88	621.05	455.02	420.89	431.33	418.91	473.40		396.13
10/20/06 16:00	24.43	329.25	276.59	388.85	621.04	455.02	420.89	431.33	418.90	473.39		396.13
10/20/06 16:15	24.43	329.26	276.60	388.88	621.05	455.03	420.89	431.34	418.91	473.39		396.13
10/20/06 16:30	24.44	329.26	276.60	388.80	621.05	455.03	420.90	431.34	418.91	473.38		396.14
10/20/06 16:45	24.45	329.27	276.60	388.83	621.04	455.03	420.88	431.34	418.91	473.37		396.13
10/20/06 17:00	24.46	329.26	276.61	388.82	621.04	455.03	420.87	431.34	418.93	473.36		396.14
10/20/06 17:15	24.47	329.28	276.60	388.80	621.05	455.03	420.86	431.35	418.92	473.35		396.13
10/20/06 17:30	24.48	329.27	276.62	388.87	621.05	455.05	420.86	431.35	418.92	473.35		396.15
10/20/06 17:45	24.49	329.27	276.62	388.83	621.04	455.05	420.87	431.35	418.92	473.34		396.15
10/20/06 18:00	24.50	329.29	276.61	388.80	621.06	455.05	420.88	431.36	418.93	473.34		396.14
10/20/06 18:15	24.52	329.29	276.63	388.80	621.05	455.05	420.88	431.36	418.93	473.33		396.14
10/20/06 18:30	24.52	329.29	276.64	388.87	621.05	455.07	420.88	431.37	418.94	473.33		396.15
10/20/06 18:45	24.53	329.29	276.63	388.82	621.06	455.07	420.88	431.37	418.94	473.32		396.15
10/20/06 19:00	24.54	329.29	276.64	388.85	621.06	455.07	420.90	431.37	418.95	473.32		396.14
10/20/06 19:15	24.54	329.30	276.65	388.80	621.06	455.06	420.89	431.38	418.95	473.32		396.14
10/20/06 19:30	24.56	329.30	276.66	388.87	621.07	455.08	420.90	431.39	418.97	473.31		396.15
10/20/06 19:45	24.57	329.31	276.66	388.85	621.07	455.09	420.90	431.39	418.97	473.30		396.15
10/20/06 20:00	24.58	329.32	276.66	388.92	621.07	455.09	420.91	431.40	418.97	473.30		396.16
10/20/06 20:15	24.58	329.32	276.67	388.85	621.08	455.10	420.92	431.41	418.97	473.30		396.17
10/20/06 20:30	24.59	329.32	276.68	388.85	621.08	455.11	420.92	431.41	418.97	473.30		396.16
10/20/06 20:45	24.60	329.33	276.68	388.95	621.09	455.11	420.93	431.42	418.98	473.30		396.17
10/20/06 21:00	24.60	329.33	276.68	389.03	621.09	455.11	420.93	431.42	418.99	473.29		396.16
10/20/06 21:15	24.61	329.33	276.68	389.15	621.10	455.12	420.94	431.42	418.99	473.29		396.18
10/20/06 21:30	24.61	329.34	276.70	388.90	621.10	455.13	420.95	431.43	419.00	473.29		396.18
10/20/06 21:45	24.62	329.34	276.71	389.25	621.11	455.13	420.96	431.44	419.01	473.29		396.18
10/20/06 22:00	24.63	329.35	276.71	388.88	621.11	455.15	420.96	431.44	419.01	473.29		396.19
10/20/06 22:15	24.63	329.35	276.72	388.87	621.11	455.15	420.97	431.44	419.02	473.29		396.20
10/20/06 22:30	24.63	329.35	276.72	389.23	621.12	455.16	420.97	431.45	419.02	473.29		396.20
10/20/06 22:45	24.64	329.35	276.72	388.98	621.13	455.16	420.98	431.46	419.03	473.29		396.20
10/20/06 23:00	24.65	329.36	276.73	389.16	621.12	455.16	420.98	431.47	419.03	473.28		396.21
10/20/06 23:15	24.65	329.36	276.73	388.93	621.13	455.17	420.98	431.47	419.03	473.28		396.22
10/20/06 23:30	24.65	329.36	276.73	389.15	621.13	455.17	420.99	431.47	419.03	473.29		396.22
10/20/06 23:45	24.66	329.36	276.73	388.90	621.13	455.17	420.99	431.47	419.04	473.29		396.21
10/21/06 0:00	24.66	329.37	276.74	389.23	621.13	455.17	420.99	431.47	419.04	473.29		396.22
10/21/06 0:15	24.66	329.37	276.74	389.06	621.13	455.18	420.99	431.47	419.04	473.30		396.21
10/21/06 0:30	24.66	329.36	276.74	389.06	621.13	455.18	420.99	431.48	419.04	473.30		396.22
10/21/06 0:45	24.66	329.36	276.74	388.98	621.13	455.18	420.99	431.47	419.04	473.30		396.21
10/21/06 1:00	24.66	329.36	276.73	388.98	621.13	455.18	420.99	431.47	419.04	473.30		396.20
10/21/06 1:15	24.66	329.36	276.73	388.98	621.12	455.17	421.00	431.47	419.04	473.30		396.21
10/21/06 1:30	24.66	329.36	276.73	389.15	621.12	455.17	421.00	431.47	419.04	473.29		396.21
10/21/06 1:45	24.66	329.36	276.73	388.95	621.12	455.17	421.00	431.47	419.04	473.29		396.21
10/21/06 2:00	24.66	329.36	276.73	389.21	621.12	455.17	421.00	431.47	419.04	473.29		396.20
10/21/06 2:15	24.67	329.35	276.73	388.98	621.12	455.17	421.00	431.47	419.04	473.28		396.20
10/21/06 2:30	24.67	329.35	276.73	388.98	621.11	455.17	421.00	431.47	419.04	473.28		396.20
10/21/06 2:45	24.67	329.35	276.72	389.05	621.11	455.17	421.00	431.46	419.04	473.28		396.19
10/21/06 3:00	24.67	329.35	276.72	389.06	621.11	455.17	420.99	431.46	419.03	473.27		396.20
10/21/06 3:15	24.67	329.34	276.72	388.93	621.10	455.16	420.99	431.46	419.03	473.27		396.18
10/21/06 3:30	24.67	329.34	276.71	389.11	621.09	455.16	420.99	431.45	419.03	473.27		396.19
10/21/06 3:45	24.67	329.33	276.71	388.97	621.09	455.16	420.99	431.45	419.02	473.27		396.18
10/21/06 4:00	24.67	329.33	276.71	388.98	621.09	455.15	420.99	431.44	419.02	473.27		396.18
10/21/06 4:15	24.67	329.33	276.70	389.03	621.08	455.15	420.99	431.44	419.02	473.26		396.18
10/21/06 4:30	24.67	329.32	276.70	389.02	621.07	455.15	420.98	431.44	419.01	473.26		396.18
10/21/06 4:45	24.67	329.32	276.70	388.98	621.07	455.15	420.98	431.44	419.02	473.26		396.17
10/21/06 5:00	24.67	329.31	276.70	388.98	621.07	455.14	420.98	431.44	419.01	473.26		396.17
10/21/06 5:15	24.67	329.32	276.70	388.90	621.07	455.14	420.97	431.44	419.01	473.26		396.17
10/21/06 5:30	24.67	329.31	276.70	388.93	621.07	455.14	420.97	431.44	419.01	473.26		396.16
10/21/06 5:45	24.68	329.31	276.69	388.93	621.06	455.14	420.97	431.43	419.01	473.26		396.16
10/21/06 6:00	24.68	329.31	276.69	388.90	621.06	455.14	420.96	431.43	419.01	473.25		396.16
10/21/06 6:15	24.69	329.31	276.70	388.92	621.06	455.14	420.96	431.43	419.00	473.25		396.16
10/21/06 6:30	24.70	329.31	276.70	388.87	621.06	455.14	420.95	431.44	419.00	473.25		396.16
10/21/06 6:45	24.70	329.32	276.70	388.88	621.05	455.14	420.95	431.44	419.00	473.24		396.16
10/21/06 7:00	24.70	329.31	276.70	388.90	621.06	455.14	420.96	431.43	419.01	473.24		396.15
10/21/06 7:15	24.70	329.31	276.70	388.88	621.05	455.14	420.97	431.43	419.01	473.24		396.15
10/21/06 7:30	24.70	329.31	276.70	388.88	621.05	455.14	420.97	431.43	419.01	473.24		396.15
10/21/06 7:45	24.71	329.31	276.70	388.95	621.05	455.14	420.96	431.44	419.01	473.23		396.15
10/21/06 8:00	24.72	329.31	276.70	388.92	621.05	455.15	420.96	431.44	419.01	473.23		396.15
10/21/06 8:15	24.72	329.32	276.71	388.93	621.06	455.15	420.97	431.44	419.02	473.28		396.16
10/21/06 8:30	24.73	329.33	276.72	389.06	621.06	455.16	420.97	431.44	419.02	473.31		396.16
10/21/06 8:45	24.74	329.33	276.72	389.03	621.07	455.16	420.98	431.45	419.03	473.31		396.17
10/21/06 9:00	24.74	329.33	276.72	389.02	621.07	455.17	420.99	431.46	419.03	473.31		396.17
10/21/06 9:15	24.74	329.33	276.72	388.93	621.07	455.17	420.99	431.46	419.03	473.31		396.17
10/21/06 9:30	24.74	329.33	276.73	389.00	621.07	455.17	421.00	431.47	419.03	473.31		396.16
10/21/06 9:45	24.75	329.33	276.73	388.95	621.07	455.18	421.00	431.47	419.04	473.31		396.18
10/21/06 10:00	24.75	329.33	276.74	389.03	621.07	455.18	421.01	431.47	419.04	473.31		396.18
10/21/06 10:15	24.75	329.34	276.74	389.02	621.07	455.18	421.01	431.47	419.04	473.31		396.18
10/21/06 10:30	24.75	329.34	276.74	389.00	621.08	455.19	421.01	431.47	419.04	473.32		396.19
10/21/06 10:45	24.75	329.35	276.74	388.98	621.07	455.19	421.01	431.48	419.05	473.32		396.19
10/21/06 11:00	24.75	329.35	276.74	389.00	621.08	455.19	421.02	431.47	419.05	473.32		396.20
10/21/06 11:15	24.75	329.35	276.74	389.02	621.08	455.20	421.02	431.48	419.05	473.32		396.20
10/21/06 11:30	24.75	329.35	276.74	389.06	621.08	455.20	421.03	431.48	419.05	473.32		396.20
10/21/06 11:45	24.75	329.34	276.74	389.03	621.08	455.20	421.03	431.48	419.06	473.32		396.21
10/21/06 12:00	24.75	329.35	276.75	389.02	621.08	455.20	421.04	431.49	419.06	473.32		396.21
10/21/06 12:15	24.75	329.34	276.74	389.02	621.08	455.20	421.03	431.49	419.06	473.32		396.21
10/21/06 12:30	24.75	329.34	276.75	389.00	621.08	455.20	421.04	431.49	419.06	473.33		396.21
10/21/06 12:45	24.74	329.34	276.74	388.95	621.07	455.20	421.05	431.47	419.06	473.33		396.21
10/21/06 13:00	24.74	329.34	276.74	389.00	621.07	455.19	421.05	431.48	419.06	473.33		396.20
10/21/06 13:15	24.74	329.34	276.74	388.97	621.07	455.19	421.05	431.47	419.05	473.33		396.20
10/21/06 13:30	24.73	329.33	276.74	388.95	621.07	455.19	421.06	431.47	419.05	473.33		396.20
10/21/06 13:45	24.73	329.33	276.74	389.03	621.06	455.19	421.07	431.47	419.05	473.33		396.20
10/21/06 14:00	24.73	329.33	276.74	388.93	621.06	455.19	421.08	431.47	419.05	473.34		396.19
10/21/06 14:15	24.72	329.33	276.73	389.03	621.05	455.19	421.09	431.47	419.04	473.34		396.18
10/21/06 14:30	24.72	329.33	276.72	388.92	621.05	455.18	421.09	431.46	419.04	473.34		396.18
10/21/06 14:45	24.72	329.32	276.72	389.02	621.05	455.17	421.09	431.46	419.03	473.33		396.18
10/21/06 15:00	24.72	329.31	276.73	388.90	621.05	455.18	421.04	431.46	419.04	473.33		396.17
10/21/06 15:15	24.73	329.31	276.72	389.00	621.04	455.18	421.03	431.46	419.03	473.32		396.18
10/21/06 15:30	24.73	329.32	276.72	388.88	621.04	455.18	421.02	431.45	419.04	473.32		396.18
10/21/06 15:45	24.74	329.32	276.72	388.93	621.03	455.18	421.02	431.46	419.03	473.32		396.17

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
10/21/06 16:00	24.74	329.32	276.73	389.15	621.04	455.18	421.02	431.46	419.04	473.31		396.17
10/21/06 16:15	24.75	329.31	276.72	389.16	621.03	455.17	421.02	431.45	419.03	473.31		396.16
10/21/06 16:30	24.75	329.31	276.72	389.10	621.03	455.17	421.01	431.45	419.03	473.31		396.17
10/21/06 16:45	24.75	329.31	276.72	388.87	621.03	455.17	421.01	431.45	419.04	473.30		396.16
10/21/06 17:00	24.75	329.31	276.72	389.18	621.03	455.17	421.00	431.45	419.04	473.30		396.16
10/21/06 17:15	24.75	329.31	276.72	388.83	621.03	455.17	421.01	431.46	419.03	473.30		396.16
10/21/06 17:30	24.75	329.31	276.72	389.03	621.03	455.17	421.03	431.45	419.03	473.30		396.17
10/21/06 17:45	24.75	329.30	276.72	389.02	621.02	455.17	421.01	431.45	419.03	473.30		396.16
10/21/06 18:00	24.75	329.30	276.72	388.92	621.02	455.17	420.99	431.45	419.03	473.30		396.17
10/21/06 18:15	24.75	329.30	276.72	389.05	621.02	455.17	420.99	431.46	419.03	473.30		396.15
10/21/06 18:30	24.75	329.30	276.72	388.88	621.02	455.17	420.98	431.45	419.03	473.30		396.13
10/21/06 18:45	24.76	329.30	276.72	389.03	621.02	455.18	420.98	431.45	419.03	473.30		396.14
10/21/06 19:00	24.76	329.30	276.73	388.97	621.02	455.18	420.99	431.46	419.04	473.30		396.15
10/21/06 19:15	24.76	329.30	276.73	388.97	621.02	455.18	420.99	431.46	419.04	473.30		396.16
10/21/06 19:30	24.77	329.31	276.73	388.93	621.03	455.18	421.00	431.46	419.04	473.29		396.16
10/21/06 19:45	24.77	329.31	276.74	388.93	621.03	455.19	421.00	431.47	419.04	473.29		396.17
10/21/06 20:00	24.77	329.31	276.74	389.02	621.03	455.19	421.00	431.47	419.05	473.30		396.18
10/21/06 20:15	24.77	329.31	276.74	389.00	621.03	455.19	421.01	431.47	419.05	473.30		396.18
10/21/06 20:30	24.77	329.31	276.74	389.03	621.04	455.20	421.01	431.47	419.05	473.30		396.17
10/21/06 20:45	24.78	329.32	276.74	388.93	621.04	455.20	421.01	431.47	419.06	473.30		396.17
10/21/06 21:00	24.78	329.32	276.75	388.95	621.04	455.20	421.02	431.48	419.06	473.30		396.17
10/21/06 21:15	24.78	329.32	276.75	388.98	621.04	455.21	421.02	431.49	419.06	473.31		396.17
10/21/06 21:30	24.78	329.33	276.75	388.92	621.05	455.21	421.02	431.49	419.07	473.31		396.17
10/21/06 21:45	24.78	329.33	276.76	388.92	621.05	455.21	421.03	431.50	419.07	473.31		396.17
10/21/06 22:00	24.78	329.33	276.76	388.87	621.05	455.22	421.02	431.50	419.07	473.31		396.18
10/21/06 22:15	24.78	329.33	276.77	388.97	621.05	455.22	421.03	431.50	419.08	473.32		396.18
10/21/06 22:30	24.79	329.34	276.77	388.92	621.05	455.23	421.03	431.50	419.08	473.32		396.18
10/21/06 22:45	24.79	329.34	276.77	388.95	621.05	455.23	421.04	431.50	419.08	473.32		396.18
10/21/06 23:00	24.79	329.34	276.78	388.93	621.05	455.23	421.05	431.51	419.08	473.33		396.18
10/21/06 23:15	24.79	329.34	276.78	388.95	621.05	455.24	421.05	431.52	419.09	473.34		396.18
10/21/06 23:30	24.79	329.34	276.78	388.95	621.05	455.24	421.04	431.51	419.09	473.35		396.18
10/21/06 23:45	24.79	329.34	276.78	388.95	621.05	455.24	421.04	431.51	419.09	473.36		396.17
10/22/06 0:00	24.78	329.34	276.78	388.97	621.05	455.24	421.05	431.51	419.09	473.36		396.18
10/22/06 0:15	24.78	329.34	276.77	389.00	621.05	455.24	421.05	431.50	419.09	473.37		396.19
10/22/06 0:30	24.78	329.34	276.78	388.98	621.05	455.24	421.05	431.50	419.08	473.37		396.19
10/22/06 0:45	24.78	329.34	276.78	389.06	621.05	455.24	421.05	431.50	419.09	473.36		396.19
10/22/06 1:00	24.79	329.34	276.78	389.08	621.05	455.24	421.05	431.50	419.09	473.36		396.20
10/22/06 1:15	24.78	329.34	276.78	388.95	621.04	455.24	421.06	431.50	419.09	473.37		396.20
10/22/06 1:30	24.79	329.33	276.77	388.95	621.04	455.23	421.05	431.50	419.09	473.36		396.19
10/22/06 1:45	24.79	329.33	276.78	388.97	621.04	455.24	421.04	431.50	419.09	473.36		396.18
10/22/06 2:00	24.79	329.33	276.77	388.90	621.04	455.23	421.05	431.50	419.08	473.36		396.18
10/22/06 2:15	24.79	329.33	276.77	388.98	621.03	455.23	421.04	431.50	419.08	473.36		396.18
10/22/06 2:30	24.79	329.33	276.77	388.93	621.03	455.23	421.04	431.49	419.08	473.36		396.18
10/22/06 2:45	24.79	329.33	276.77	388.95	621.03	455.23	421.05	431.49	419.08	473.35		396.18
10/22/06 3:00	24.79	329.32	276.77	388.88	621.02	455.22	421.05	431.49	419.08	473.35		396.18
10/22/06 3:15	24.78	329.32	276.76	388.97	621.02	455.22	421.05	431.48	419.07	473.35		396.17
10/22/06 3:30	24.78	329.31	276.76	388.90	621.01	455.21	421.05	431.48	419.07	473.35		396.16
10/22/06 3:45	24.78	329.30	276.75	388.93	621.01	455.21	421.04	431.48	419.06	473.35		396.15
10/22/06 4:00	24.77	329.30	276.74	388.87	621.00	455.21	421.04	431.47	419.06	473.34		396.15
10/22/06 4:15	24.77	329.29	276.74	388.90	620.99	455.20	421.04	431.47	419.06	473.34		396.15
10/22/06 4:30	24.77	329.29	276.74	388.95	620.99	455.20	421.03	431.47	419.05	473.34		396.14
10/22/06 4:45	24.78	329.29	276.74	388.88	620.99	455.20	421.03	431.46	419.05	473.33		396.13
10/22/06 5:00	24.77	329.29	276.73	388.87	620.98	455.19	421.02	431.46	419.05	473.33		396.15
10/22/06 5:15	24.77	329.28	276.73	388.90	620.98	455.19	421.02	431.45	419.04	473.33		396.14
10/22/06 5:30	24.78	329.28	276.72	388.93	620.98	455.19	421.01	431.44	419.04	473.33		396.15
10/22/06 5:45	24.78	329.28	276.72	388.88	620.97	455.18	421.00	431.44	419.04	473.32		396.15
10/22/06 6:00	24.78	329.27	276.72	388.88	620.97	455.19	421.00	431.44	419.04	473.31		396.17
10/22/06 6:15	24.78	329.27	276.72	388.87	620.97	455.18	420.99	431.44	419.04	473.31		396.16
10/22/06 6:30	24.78	329.27	276.73	388.85	620.97	455.18	420.99	431.45	419.04	473.31		396.17
10/22/06 6:45	24.78	329.27	276.73	388.88	620.97	455.18	420.99	431.45	419.04	473.31		396.18
10/22/06 7:00	24.78	329.27	276.72	388.90	620.96	455.18	420.99	431.44	419.04	473.31		396.16
10/22/06 7:15	24.79	329.27	276.72	388.85	620.96	455.18	420.99	431.45	419.04	473.30		396.16
10/22/06 7:30	24.79	329.27	276.73	388.88	620.96	455.18	420.99	431.45	419.04	473.30		396.16
10/22/06 7:45	24.79	329.27	276.72	388.87	620.96	455.18	421.00	431.44	419.04	473.30		396.15
10/22/06 8:00	24.79	329.27	276.73	388.87	620.96	455.18	421.00	431.45	419.04	473.30		396.13
10/22/06 8:15	24.79	329.27	276.73	388.88	620.96	455.19	421.01	431.45	419.04	473.30		396.12
10/22/06 8:30	24.80	329.27	276.73	388.95	620.96	455.19	421.02	431.46	419.04	473.30		396.11
10/22/06 8:45	24.80	329.27	276.73	389.05	620.96	455.19	421.03	431.46	419.04	473.30		396.10
10/22/06 9:00	24.80	329.27	276.73	389.02	620.97	455.20	421.04	431.46	419.05	473.30		396.09
10/22/06 9:15	24.80	329.27	276.73	388.88	620.97	455.19	421.04	431.45	419.05	473.30		396.09
10/22/06 9:30	24.80	329.28	276.73	388.88	620.96	455.20	421.04	431.46	419.05	473.30		396.11
10/22/06 9:45	24.80	329.28	276.74	388.93	620.97	455.20	421.05	431.46	419.06	473.30		396.11
10/22/06 10:00	24.80	329.28	276.74	388.93	620.97	455.20	421.07	431.47	419.05	473.30		396.12
10/22/06 10:15	24.80	329.28	276.74	388.93	620.97	455.20	421.07	431.47	419.06	473.31		396.13
10/22/06 10:30	24.80	329.28	276.73	388.88	620.97	455.20	421.09	431.47	419.06	473.31		396.13
10/22/06 10:45	24.79	329.28	276.74	388.93	620.96	455.20	421.09	431.47	419.05	473.31		396.13
10/22/06 11:00	24.79	329.28	276.73	388.93	620.97	455.20	421.08	431.46	419.07	473.32		396.13
10/22/06 11:15	24.78	329.28	276.75	388.93	620.96	455.21	421.10	431.47	419.07	473.32		396.13
10/22/06 11:30	24.78	329.29	276.73	388.90	620.96	455.20	421.11	431.47	419.07	473.33		396.13
10/22/06 11:45	24.78	329.28	276.74	388.93	620.96	455.21	421.12	431.47	419.06	473.33		396.13
10/22/06 12:00	24.78	329.28	276.73	389.00	620.97	455.22	421.11	431.47	419.07	473.33		396.12
10/22/06 12:15	24.77	329.28	276.74	388.90	620.96	455.22	421.10	431.47	419.07	473.33		396.12
10/22/06 12:30	24.77	329.27	276.73	388.98	620.96	455.21	421.10	431.47	419.06	473.34		396.12
10/22/06 12:45	24.76	329.27	276.73	388.95	620.95	455.22	421.12	431.47	419.07	473.34		396.12
10/22/06 13:00	24.75	329.27	276.73	389.03	620.95	455.20	421.12	431.46	419.06	473.35		396.12
10/22/06 13:15	24.75	329.27	276.73	388.97	620.94	455.20	421.13	431.45	419.06	473.35		396.10
10/22/06 13:30	24.74	329.26	276.72	388.97	620.94	455.20	421.13	431.46	419.05	473.35		396.10
10/22/06 13:45	24.74	329.26	276.73	388.85	620.93	455.20	421.13	431.44	419.05	473.36		396.10
10/22/06 14:00	24.73	329.26	276.72	388.90	620.93	455.19	421.13	431.44	419.04	473.36		396.10
10/22/06 14:15	24.73	329.26	276.72	388.93	620.93	455.19	421.13	431.44	419.05	473.37		396.09
10/22/06 14:30	24.72	329.25	276.72	388.87	620.93	455.18	421.13	431.44	419.04	473.36		396.09
10/22/06 14:45	24.72	329.25	276.71	388.95	620.92	455.18	421.12	431.44	419.04	473.36		396.09
10/22/06 15:00	24.71	329.25	276.70	388.80	620.93	455.18	421.12	431.44	419.04	473.37		396.08
10/22/06 15:15	24.71	329.24	276.70	388.88	620.92	455.17	421.12	431.43	419.03	473.37		396.09
10/22/06 15:30	24.71	329.24	276.70	388.87	620.92	455.18	421.11	431.43	419.02	473.37		396.07
10/22/06 15:45	24.71	329.23	276.70	388.88	620.92	455.17	421.11	431.42	419.03	473.36		396.08
10/22/06 16:00	24.70	329.24	276.69	388.87	620.91	455.17	421.10	431.42	419.04	473.36		396.07
10/22/06 16:15	24.71	329.23	276.70	388.90	620.90	455.16	421.10	431.42	419.03	473.37		396.06
10/22/06 16:30	24.70	329.22	276.69	388.95	620.90	455.16	421.09	431.42	419.03	473.36		396.07
10/22/06 16:45	24.70	329.23	276.69	388.92	620.90	455.16	421.09	431.42	419.03	473.37		396.06

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
10/22/06 17:00	24.69	329.21	276.69	388.87	620.89	455.16	421.08	431.40	419.02	473.37		396.06
10/22/06 17:15	24.69	329.21	276.68	388.80	620.89	455.15	421.08	431.41	419.02	473.37		396.06
10/22/06 17:30	24.69	329.21	276.68	388.83	620.88	455.15	421.08	431.40	419.02	473.37		396.05
10/22/06 17:45	24.69	329.20	276.68	388.88	620.88	455.15	421.06	431.40	419.01	473.37		396.04
10/22/06 18:00	24.69	329.20	276.68	388.78	620.88	455.15	421.05	431.39	419.01	473.37		396.05
10/22/06 18:15	24.69	329.20	276.68	388.85	620.88	455.15	421.04	431.40	419.01	473.37		396.05
10/22/06 18:30	24.69	329.20	276.68	388.78	620.88	455.15	421.03	431.39	419.01	473.37		396.05
10/22/06 18:45	24.69	329.20	276.68	388.83	620.88	455.15	421.03	431.40	419.01	473.37		396.04
10/22/06 19:00	24.70	329.20	276.68	388.77	620.88	455.15	421.03	431.40	419.01	473.37		396.04
10/22/06 19:15	24.69	329.20	276.69	388.85	620.87	455.15	421.03	431.40	419.01	473.37		396.04
10/22/06 19:30	24.70	329.20	276.69	388.75	620.88	455.15	421.03	431.40	419.01	473.37		396.04
10/22/06 19:45	24.70	329.21	276.69	388.82	620.88	455.16	421.03	431.41	419.02	473.37		396.04
10/22/06 20:00	24.70	329.21	276.69	388.78	620.88	455.16	421.03	431.41	419.02	473.37		396.04
10/22/06 20:15	24.70	329.21	276.69	388.80	620.88	455.16	421.03	431.41	419.02	473.37		396.06
10/22/06 20:30	24.71	329.21	276.69	388.80	620.88	455.16	421.03	431.41	419.02	473.37		396.06
10/22/06 20:45	24.71	329.21	276.70	388.78	620.88	455.17	421.04	431.42	419.03	473.37		396.06
10/22/06 21:00	24.72	329.21	276.70	388.80	620.88	455.17	421.03	431.42	419.03	473.37		396.06
10/22/06 21:15	24.71	329.22	276.71	388.82	620.89	455.17	421.03	431.42	419.04	473.37		396.06
10/22/06 21:30	24.71	329.22	276.71	388.78	620.89	455.18	421.05	431.43	419.04	473.38		396.07
10/22/06 21:45	24.72	329.22	276.72	388.83	620.89	455.18	421.05	431.43	419.04	473.38		396.07
10/22/06 22:00	24.72	329.23	276.72	388.80	620.90	455.19	421.06	431.44	419.04	473.38		396.07
10/22/06 22:15	24.71	329.23	276.72	388.80	620.90	455.19	421.05	431.44	419.05	473.38		396.07
10/22/06 22:30	24.72	329.24	276.73	388.88	620.90	455.19	421.06	431.44	419.05	473.38		396.08
10/22/06 22:45	24.72	329.23	276.73	388.80	620.91	455.20	421.05	431.44	419.05	473.39		396.09
10/22/06 23:00	24.72	329.23	276.73	388.80	620.91	455.20	421.07	431.44	419.06	473.39		396.08
10/22/06 23:15	24.71	329.23	276.73	388.82	620.90	455.20	421.07	431.44	419.06	473.40		396.08
10/22/06 23:30	24.71	329.24	276.73	388.85	620.91	455.20	421.07	431.44	419.06	473.40		396.09
10/22/06 23:45	24.71	329.24	276.73	388.85	620.91	455.20	421.07	431.44	419.06	473.40		396.08
10/23/06 0:00	24.71	329.23	276.73	388.88	620.90	455.20	421.08	431.44	419.06	473.41		396.08
10/23/06 0:15	24.70	329.24	276.73	388.83	620.90	455.20	421.08	431.44	419.06	473.41		396.08
10/23/06 0:30	24.70	329.23	276.73	388.95	620.90	455.20	421.08	431.44	419.06	473.41		396.08
10/23/06 0:45	24.70	329.23	276.73	389.11	620.89	455.20	421.09	431.44	419.06	473.42		396.08
10/23/06 1:00	24.70	329.23	276.72	389.08	620.90	455.20	421.08	431.44	419.06	473.41		396.08
10/23/06 1:15	24.70	329.23	276.73	388.77	620.90	455.20	421.09	431.44	419.06	473.42		396.07
10/23/06 1:30	24.70	329.23	276.73	389.03	620.89	455.20	421.08	431.44	419.06	473.41		396.07
10/23/06 1:45	24.69	329.22	276.73	388.80	620.90	455.19	421.09	431.44	419.06	473.42		396.07
10/23/06 2:00	24.69	329.23	276.72	389.03	620.89	455.19	421.08	431.44	419.06	473.42		396.07
10/23/06 2:15	24.69	329.22	276.72	388.92	620.88	455.19	421.09	431.43	419.05	473.42		396.06
10/23/06 2:30	24.69	329.22	276.72	388.90	620.88	455.19	421.08	431.43	419.05	473.42		396.06
10/23/06 2:45	24.69	329.21	276.72	388.88	620.88	455.19	421.09	431.43	419.05	473.42		396.06
10/23/06 3:00	24.68	329.21	276.71	388.93	620.87	455.18	421.07	431.42	419.05	473.41		396.05
10/23/06 3:15	24.68	329.21	276.71	388.80	620.87	455.18	421.07	431.42	419.04	473.41		396.05
10/23/06 3:30	24.68	329.20	276.71	388.82	620.87	455.18	421.07	431.42	419.04	473.41		396.05
10/23/06 3:45	24.68	329.20	276.71	388.88	620.86	455.18	421.06	431.42	419.03	473.41		396.04
10/23/06 4:00	24.67	329.20	276.71	388.80	620.85	455.18	421.07	431.41	419.03	473.40		396.04
10/23/06 4:15	24.68	329.20	276.70	388.82	620.85	455.17	421.08	431.40	419.03	473.40		396.04
10/23/06 4:30	24.67	329.19	276.69	388.80	620.85	455.17	421.07	431.40	419.02	473.40		396.03
10/23/06 4:45	24.66	329.18	276.69	388.80	620.84	455.16	421.06	431.39	419.02	473.40		396.03
10/23/06 5:00	24.67	329.18	276.68	388.80	620.83	455.15	421.06	431.39	419.02	473.40		396.02
10/23/06 5:15	24.67	329.18	276.68	388.78	620.83	455.15	421.06	431.39	419.02	473.40		396.01
10/23/06 5:30	24.68	329.17	276.68	388.78	620.83	455.15	421.05	431.39	419.02	473.39		396.02
10/23/06 5:45	24.68	329.17	276.68	388.78	620.82	455.15	421.05	431.39	419.01	473.38		396.02
10/23/06 6:00	24.68	329.17	276.68	388.75	620.82	455.15	421.05	431.39	419.01	473.38		396.01
10/23/06 6:15	24.68	329.16	276.68	388.73	620.82	455.15	421.05	431.37	419.01	473.38		396.01
10/23/06 6:30	24.67	329.16	276.67	388.73	620.82	455.15	421.05	431.37	419.01	473.38		396.00
10/23/06 6:45	24.68	329.15	276.67	388.73	620.81	455.14	421.04	431.37	419.01	473.38		395.99
10/23/06 7:00	24.68	329.15	276.67	388.73	620.81	455.14	421.03	431.36	419.00	473.37		396.00
10/23/06 7:15	24.67	329.15	276.66	388.72	620.81	455.14	421.04	431.36	419.00	473.37		396.00
10/23/06 7:30	24.67	329.15	276.67	388.73	620.81	455.13	421.04	431.37	419.00	473.37		395.99
10/23/06 7:45	24.67	329.15	276.66	388.75	620.80	455.14	421.04	431.36	419.00	473.37		395.99
10/23/06 8:00	24.67	329.15	276.66	388.72	620.80	455.13	421.04	431.37	419.00	473.37		395.99
10/23/06 8:15	24.68	329.15	276.66	388.73	620.81	455.14	421.06	431.37	419.00	473.37		395.99
10/23/06 8:30	24.67	329.15	276.66	388.73	620.81	455.14	421.06	431.37	419.00	473.36		395.99
10/23/06 8:45	24.67	329.15	276.66	388.77	620.80	455.14	421.07	431.37	419.00	473.37		395.98
10/23/06 9:00	24.67	329.15	276.66	388.73	620.81	455.14	421.08	431.37	419.00	473.37		395.99
10/23/06 9:15	24.67	329.15	276.67	388.75	620.80	455.14	421.09	431.37	419.00	473.36		395.99
10/23/06 9:30	24.67	329.15	276.67	388.75	620.80	455.14	421.09	431.37	419.01	473.37		395.99
10/23/06 9:45	24.66	329.15	276.67	388.75	620.81	455.15	421.09	431.38	419.01	473.37		395.99
10/23/06 10:00	24.66	329.15	276.67	388.75	620.81	455.15	421.09	431.38	419.01	473.37		395.99
10/23/06 10:15	24.66	329.15	276.68	388.78	620.80	455.15	421.08	431.38	419.01	473.37		395.99
10/23/06 10:30	24.65	329.15	276.68	388.80	620.81	455.15	421.09	431.38	419.01	473.38		395.99
10/23/06 10:45	24.65	329.16	276.67	388.77	620.81	455.15	421.09	431.38	419.01	473.38		395.99
10/23/06 11:00	24.64	329.15	276.67	389.59	620.81	455.15	421.09	431.38	419.01	473.38		395.99
10/23/06 11:15	24.64	329.15	276.67	389.20	620.81	455.15	421.09	431.39	419.01	473.38		395.98
10/23/06 11:30	24.64	329.15	276.67	389.05	620.81	455.15	421.09	431.39	419.01	473.38		395.99
10/23/06 11:45	24.64	329.16	276.66	389.02	620.81	455.15	421.09	431.39	419.02	473.39		395.97
10/23/06 12:00	24.64	329.15	276.66	388.98	620.81	455.15	421.10	431.38	419.02	473.39		395.99
10/23/06 12:15	24.63	329.15	276.67	388.97	620.81	455.15	421.10	431.38	419.02	473.39		395.98
10/23/06 12:30	24.62	329.16	276.68	388.93	620.80	455.15	421.10	431.39	419.02	473.40		395.98
10/23/06 12:45	24.62	329.15	276.67	388.92	620.80	455.15	421.10	431.39	419.02	473.40		395.98
10/23/06 13:00	24.62	329.15	276.67	388.90	620.80	455.15	421.10	431.39	419.02	473.40		395.98
10/23/06 13:15	24.61	329.15	276.68	388.92	620.80	455.15	421.10	431.38	419.01	473.40		395.98
10/23/06 13:30	24.61	329.15	276.67	388.88	620.80	455.15	421.10	431.38	419.01	473.41		395.97
10/23/06 13:45	24.60	329.14	276.66	388.83	620.79	455.14	421.09	431.37	419.01	473.42		395.97
10/23/06 14:00	24.60	329.13	276.66	388.83	620.79	455.14	421.08	431.37	419.01	473.41		395.97
10/23/06 14:15	24.59	329.13	276.66	388.80	620.79	455.14	421.09	431.36	419.01	473.42		395.96
10/23/06 14:30	24.59	329.14	276.66	388.77	620.78	455.14	421.07	431.36	419.01	473.42		395.96
10/23/06 14:45	24.59	329.13	276.66	388.70	620.78	455.14	421.08	431.36	419.00	473.42		395.96
10/23/06 15:00	24.59	329.13	276.65	388.72	620.78	455.13	421.06	431.36	419.00	473.42		395.96
10/23/06 15:15	24.59	329.13	276.66	388.70	620.78	455.13	421.07	431.36	419.00	473.41		395.96
10/23/06 15:30	24.59	329.13	276.66	388.68	620.78	455.13	421.06	431.36	419.01	473.41		395.95
10/23/06 15:45	24.59	329.13	276.65	388.68	620.78	455.13	421.05	431.36	419.00	473.41		395.95
10/23/06 16:00	24.60	329.12	276.65	388.70	620.77	455.13	421.05	431.36	419.00	473.41		395.95
10/23/06 16:15	24.59	329.12	276.66	388.68	620.77	455.13	421.04	431.35	419.00	473.41		395.96
10/23/06 16:30	24.59	329.12	276.65	388.68	620.76	455.13	421.04	431.35	418.99	473.41		395.95
10/23/06 16:45	24.59	329.11	276.64	388.67	620.76	455.12	421.03	431.35	418.99	473.41		395.94
10/23/06 17:00	24.59	329.11	276.64	388.67	620.76	455.12	421.03	431.34	418.99	473.41		395.94
10/23/06 17:15	24.59	329.11	276.64	388.67	620.75	455.11	420.99	431.34	418.99	473.41		395.94
10/23/06 17:30	24.58	329.10	276.64	388.67	620.75	455.12	421.00	431.34	418.98	473.41		395.94
10/23/06 17:45	24.59	329.09	276.63	388.67	620.75	455.11	420.98	431.34	418.98	473.41		395.93

Date	Inches Hg BP	DTH2O KM-8-136	DTH2O SWMP-4	DTH2O SWMP-3	DTH2O SWMP-1	DTH2O SWMU-2	DTH2O SWMO-2	DTH2O SWPW-2	DTH2O SWMO-1	DTH2O SWMU-1	DTH2O SWPW-1	DTH2O SWMP-2
10/23/06 18:00	24.59	329.10	276.64	388.67	620.74	455.11	420.96	431.33	418.98	473.41		395.93
10/23/06 18:15	24.59	329.10	276.63	388.68	620.74	455.11	420.94	431.33	418.98	473.41		395.93
10/23/06 18:30	24.59	329.09	276.63	388.68	620.74	455.11	420.93	431.33	418.98	473.41		395.92
10/23/06 18:45	24.60	329.09	276.64	388.75	620.74	455.11	420.94	431.33	418.98	473.41		395.93
10/23/06 19:00	24.60	329.09	276.64	388.68	620.74	455.12	420.94	431.33	418.98	473.41		395.92
10/23/06 19:15	24.61	329.10	276.64	388.70	620.74	455.12	420.94	431.34	418.98	473.41		395.93
10/23/06 19:30	24.61	329.10	276.64	388.73	620.74	455.12	420.94	431.33	418.98	473.41		395.94
10/23/06 19:45	24.61	329.10	276.65	388.68	620.74	455.11	420.93	431.33	418.99	473.41		395.93
10/23/06 20:00	24.61	329.10	276.64	388.67	620.74	455.12	420.94	431.34	418.98	473.41		395.93
10/23/06 20:15	24.61	329.10	276.64	388.68	620.75	455.12	420.94	431.34	418.99	473.41		395.93
10/23/06 20:30	24.61	329.10	276.64	388.68	620.75	455.12	420.94	431.34	418.99	473.41		395.93
10/23/06 20:45	24.61	329.10	276.65	388.70	620.75	455.12	420.94	431.34	418.99	473.41		395.93
10/23/06 21:00	24.61	329.10	276.65	388.72	620.75	455.13	420.94	431.34	418.99	473.41		395.94
10/23/06 21:15	24.62	329.10	276.66	388.72	620.75	455.13	420.95	431.35	419.00	473.42		395.94
10/23/06 21:30	24.61	329.11	276.65	388.72	620.75	455.13	420.95	431.35	419.00	473.42		395.94
10/23/06 21:45	24.62	329.11	276.66	388.72	620.75	455.14	420.97	431.35	419.00	473.42		395.94
10/23/06 22:00	24.62	329.11	276.66	388.70	620.76	455.14	420.97	431.36	419.01	473.43		395.94
10/23/06 22:15	24.62	329.12	276.67	388.72	620.76	455.14	420.97	431.36	419.01	473.43		395.94
10/23/06 22:30	24.62	329.12	276.66	388.72	620.76	455.15	420.98	431.36	419.01	473.43		395.94
10/23/06 22:45	24.62	329.13	276.67	388.72	620.76	455.15	420.98	431.36	419.02	473.43		395.94
10/23/06 23:00	24.62	329.12	276.68	388.73	620.76	455.15	420.99	431.36	419.02	473.43		395.95
10/23/06 23:15	24.62	329.12	276.67	388.75	620.76	455.16	420.99	431.36	419.03	473.44		395.95
10/23/06 23:30	24.63	329.13	276.68	388.73	620.76	455.16	420.98	431.37	419.03	473.44		395.96
10/23/06 23:45	24.63	329.13	276.68	388.75	620.77	455.17	420.97	431.38	419.03	473.44		395.96
10/24/06 0:00	24.63	329.13	276.69	388.77	620.77	455.17	420.98	431.38	419.03	473.44		395.96
10/24/06 0:15	24.64	329.14	276.70	388.78	620.77	455.17	420.98	431.39	419.03	473.44		395.97
10/24/06 0:30	24.64	329.14	276.69	388.78	620.77	455.17	420.99	431.38	419.04	473.44		395.98
10/24/06 0:45	24.63	329.14	276.69	388.78	620.77	455.17	420.99	431.38	419.04	473.45		395.97
10/24/06 1:00	24.63	329.13	276.69	388.78	620.77	455.17	420.99	431.37	419.03	473.45		395.97
10/24/06 1:15	24.63	329.13	276.69	388.78	620.77	455.17	420.99	431.38	419.03	473.45		395.98
10/24/06 1:30	24.63	329.13	276.70	388.78	620.77	455.17	420.98	431.38	419.03	473.45		395.97
10/24/06 1:45	24.64	329.13	276.70	388.77	620.77	455.17	420.98	431.38	419.04	473.44		395.97
10/24/06 2:00	24.63	329.14	276.70	388.77	620.77	455.18	420.99	431.39	419.04	473.45		395.98
10/24/06 2:15	24.64	329.13	276.70	388.77	620.76	455.18	420.99	431.39	419.04	473.44		395.97
10/24/06 2:30	24.64	329.13	276.70	388.77	620.77	455.18	420.99	431.38	419.04	473.44		395.96
10/24/06 2:45	24.64	329.13	276.70	388.77	620.76	455.17	420.99	431.38	419.04	473.44		395.96
10/24/06 3:00	24.64	329.13	276.70	388.77	620.76	455.17	420.99	431.37	419.04	473.44		395.97
10/24/06 3:15	24.64	329.13	276.69	388.78	620.76	455.17	420.99	431.38	419.03	473.44		395.96
10/24/06 3:30	24.64	329.12	276.69	388.80	620.76	455.17	420.99	431.37	419.03	473.44		395.96
10/24/06 3:45	24.63	329.12	276.69	388.77	620.75	455.17	420.99	431.37	419.03	473.44		395.95
10/24/06 4:00	24.63	329.12	276.68	388.77	620.75	455.16	420.99	431.36	419.03	473.44		395.95
10/24/06 4:15	24.63	329.11	276.68	388.75	620.74	455.16	420.98	431.36	419.02	473.44		395.95
10/24/06 4:30	24.63	329.11	276.68	388.75	620.74	455.16	420.98	431.35	419.02	473.43		395.94
10/24/06 4:45	24.63	329.10	276.67	388.77	620.73	455.15	420.98	431.36	419.01	473.43		395.94
10/24/06 5:00	24.63	329.10	276.67	388.75	620.73	455.15	420.98	431.35	419.01	473.43		395.94
10/24/06 5:15	24.63	329.10	276.67	388.75	620.72	455.15	420.97	431.34	419.01	473.42		395.93
10/24/06 5:30	24.63	329.09	276.66	388.72	620.72	455.14	420.97	431.34	419.00	473.42		395.93
10/24/06 5:45	24.63	329.09	276.66	388.72	620.72	455.14	420.97	431.34	419.00	473.42		395.92
10/24/06 6:00	24.63	329.09	276.66	388.70	620.71	455.14	420.97	431.34	419.00	473.41		395.92
10/24/06 6:15	24.63	329.08	276.66	388.72	620.71	455.13	420.94	431.34	419.00	473.41		395.92
10/24/06 6:30	24.63	329.08	276.66	388.70	620.71	455.13	420.95	431.33	419.00	473.41		395.92
10/24/06 6:45	24.63	329.08	276.65	388.70	620.70	455.13	420.94	431.33	418.99	473.40		395.91
10/24/06 7:00	24.63	329.07	276.65	388.72	620.70	455.13	420.94	431.32	418.99	473.40		395.91
10/24/06 7:15	24.63	329.08	276.65	388.70	620.70	455.13	420.94	431.32	418.99	473.40		395.91
10/24/06 7:30	24.63	329.07	276.64	388.70	620.69	455.12	420.93	431.33	418.99	473.40		395.90
10/24/06 7:45	24.63	329.07	276.65	388.70	620.69	455.12	420.94	431.32	418.99	473.40		395.91
10/24/06 8:00	24.64	329.06	276.65	388.70	620.69	455.12	420.94	431.33	418.99	473.39		395.90
10/24/06 8:15	24.63	329.07	276.65	388.70	620.69	455.12	420.97	431.32	418.99	473.39		395.90
10/24/06 8:30	24.63	329.06	276.64	388.70	620.69	455.12	421.00	431.32	418.98	473.39		395.89
10/24/06 8:45	24.62	329.06	276.64	388.68	620.68	455.12	421.01	431.31	418.98	473.40		395.89
10/24/06 9:00	24.62	329.06	276.64	388.70	620.68	455.12	421.02	431.32	418.98	473.40		395.89

APPENDIX D2
FIVE MINUTE DEPTH TO WATER DATA
(Pumping Wells SWPW-2 Test 1 and SWPW-1 Test 2)

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	8/21/06 15:00	433.71	SWPW-1	10/4/06 16:00	462.68
SWPW-2	8/21/06 15:05	438.16	SWPW-1	10/4/06 16:05	462.68
SWPW-2	8/21/06 15:10	434.62	SWPW-1	10/4/06 16:10	462.71
SWPW-2	8/21/06 15:15	434.28	SWPW-1	10/4/06 16:15	462.69
SWPW-2	8/21/06 15:20	434.14	SWPW-1	10/4/06 16:20	462.68
SWPW-2	8/21/06 15:25	434.07	SWPW-1	10/4/06 16:25	462.68
SWPW-2	8/21/06 15:30	433.99	SWPW-1	10/4/06 16:30	462.69
SWPW-2	8/21/06 15:35	433.95	SWPW-1	10/4/06 16:35	462.68
SWPW-2	8/21/06 15:40	433.92	SWPW-1	10/4/06 16:40	462.67
SWPW-2	8/21/06 15:45	433.92	SWPW-1	10/4/06 16:45	462.71
SWPW-2	8/21/06 15:50	433.84	SWPW-1	10/4/06 16:50	462.68
SWPW-2	8/21/06 15:55	433.89	SWPW-1	10/4/06 16:55	462.66
SWPW-2	8/21/06 16:00	433.87	SWPW-1	10/4/06 17:00	462.69
SWPW-2	8/21/06 16:05	433.84	SWPW-1	10/4/06 17:05	462.67
SWPW-2	8/21/06 16:10	433.83	SWPW-1	10/4/06 17:10	462.71
SWPW-2	8/21/06 16:15	433.77	SWPW-1	10/4/06 17:15	462.66
SWPW-2	8/21/06 16:20	433.78	SWPW-1	10/4/06 17:20	462.70
SWPW-2	8/21/06 16:25	433.79	SWPW-1	10/4/06 17:25	462.70
SWPW-2	8/21/06 16:30	433.81	SWPW-1	10/4/06 17:30	462.70
SWPW-2	8/21/06 16:35	433.77	SWPW-1	10/4/06 17:35	462.67
SWPW-2	8/21/06 16:40	433.80	SWPW-1	10/4/06 17:40	462.70
SWPW-2	8/21/06 16:45	433.76	SWPW-1	10/4/06 17:45	462.66
SWPW-2	8/21/06 16:50	433.76	SWPW-1	10/4/06 17:50	462.66
SWPW-2	8/21/06 16:55	433.74	SWPW-1	10/4/06 17:55	462.65
SWPW-2	8/21/06 17:00	433.73	SWPW-1	10/4/06 18:00	462.69
SWPW-2	8/21/06 17:05	433.74	SWPW-1	10/4/06 18:05	462.70
SWPW-2	8/21/06 17:10	433.72	SWPW-1	10/4/06 18:10	462.66
SWPW-2	8/21/06 17:15	433.72	SWPW-1	10/4/06 18:15	462.64
SWPW-2	8/21/06 17:20	433.71	SWPW-1	10/4/06 18:20	462.68
SWPW-2	8/21/06 17:25	433.72	SWPW-1	10/4/06 18:25	462.65
SWPW-2	8/21/06 17:30	433.70	SWPW-1	10/4/06 18:30	462.65
SWPW-2	8/21/06 17:35	433.72	SWPW-1	10/4/06 18:35	462.67
SWPW-2	8/21/06 17:40	433.70	SWPW-1	10/4/06 18:40	462.67
SWPW-2	8/21/06 17:45	433.72	SWPW-1	10/4/06 18:45	462.67
SWPW-2	8/21/06 17:50	433.69	SWPW-1	10/4/06 18:50	462.66
SWPW-2	8/21/06 17:55	433.72	SWPW-1	10/4/06 18:55	462.65
SWPW-2	8/21/06 18:00	433.71	SWPW-1	10/4/06 19:00	462.66
SWPW-2	8/21/06 18:05	433.71	SWPW-1	10/4/06 19:05	462.69
SWPW-2	8/21/06 18:10	433.70	SWPW-1	10/4/06 19:10	462.65
SWPW-2	8/21/06 18:15	433.67	SWPW-1	10/4/06 19:15	462.65
SWPW-2	8/21/06 18:20	433.69	SWPW-1	10/4/06 19:20	462.66
SWPW-2	8/21/06 18:25	433.71	SWPW-1	10/4/06 19:25	462.66
SWPW-2	8/21/06 18:30	433.69	SWPW-1	10/4/06 19:30	462.66
SWPW-2	8/21/06 18:35	433.70	SWPW-1	10/4/06 19:35	462.66
SWPW-2	8/21/06 18:40	433.67	SWPW-1	10/4/06 19:40	462.69
SWPW-2	8/21/06 18:45	433.67	SWPW-1	10/4/06 19:45	462.70
SWPW-2	8/21/06 18:50	433.69	SWPW-1	10/4/06 19:50	462.69
SWPW-2	8/21/06 18:55	433.66	SWPW-1	10/4/06 19:55	462.67
SWPW-2	8/21/06 19:00	433.66	SWPW-1	10/4/06 20:00	462.72
SWPW-2	8/21/06 19:05	433.67	SWPW-1	10/4/06 20:05	462.67
SWPW-2	8/21/06 19:10	433.73	SWPW-1	10/4/06 20:10	462.69
SWPW-2	8/21/06 19:15	433.65	SWPW-1	10/4/06 20:15	462.71
SWPW-2	8/21/06 19:20	433.71	SWPW-1	10/4/06 20:20	462.67
SWPW-2	8/21/06 19:25	433.68	SWPW-1	10/4/06 20:25	462.67
SWPW-2	8/21/06 19:30	433.64	SWPW-1	10/4/06 20:30	462.68
SWPW-2	8/21/06 19:35	433.71	SWPW-1	10/4/06 20:35	462.68
SWPW-2	8/21/06 19:40	433.68	SWPW-1	10/4/06 20:40	462.67
SWPW-2	8/21/06 19:45	433.65	SWPW-1	10/4/06 20:45	462.71
SWPW-2	8/21/06 19:50	433.67	SWPW-1	10/4/06 20:50	462.69
SWPW-2	8/21/06 19:55	433.68	SWPW-1	10/4/06 20:55	462.69
SWPW-2	8/21/06 20:00	433.69	SWPW-1	10/4/06 21:00	462.69
SWPW-2	8/21/06 20:05	433.69	SWPW-1	10/4/06 21:05	462.69
SWPW-2	8/21/06 20:10	433.71	SWPW-1	10/4/06 21:10	462.68
SWPW-2	8/21/06 20:15	433.69	SWPW-1	10/4/06 21:15	462.69
SWPW-2	8/21/06 20:20	433.68	SWPW-1	10/4/06 21:20	462.68
SWPW-2	8/21/06 20:25	433.64	SWPW-1	10/4/06 21:25	462.70
SWPW-2	8/21/06 20:30	433.66	SWPW-1	10/4/06 21:30	462.72
SWPW-2	8/21/06 20:35	433.71	SWPW-1	10/4/06 21:35	462.72
SWPW-2	8/21/06 20:40	433.71	SWPW-1	10/4/06 21:40	462.69
SWPW-2	8/21/06 20:45	433.66	SWPW-1	10/4/06 21:45	462.73
SWPW-2	8/21/06 20:50	433.66	SWPW-1	10/4/06 21:50	462.68
SWPW-2	8/21/06 20:55	433.66	SWPW-1	10/4/06 21:55	462.71
SWPW-2	8/21/06 21:00	433.68	SWPW-1	10/4/06 22:00	462.70
SWPW-2	8/21/06 21:05	433.68	SWPW-1	10/4/06 22:05	462.72
SWPW-2	8/21/06 21:10	433.66	SWPW-1	10/4/06 22:10	462.69
SWPW-2	8/21/06 21:15	433.68	SWPW-1	10/4/06 22:15	462.69
SWPW-2	8/21/06 21:20	433.65	SWPW-1	10/4/06 22:20	462.69
SWPW-2	8/21/06 21:25	433.67	SWPW-1	10/4/06 22:25	462.69
SWPW-2	8/21/06 21:30	433.66	SWPW-1	10/4/06 22:30	462.69
SWPW-2	8/21/06 21:35	433.67	SWPW-1	10/4/06 22:35	462.70
SWPW-2	8/21/06 21:40	433.67	SWPW-1	10/4/06 22:40	462.72
SWPW-2	8/21/06 21:45	433.69	SWPW-1	10/4/06 22:45	462.69
SWPW-2	8/21/06 21:50	433.69	SWPW-1	10/4/06 22:50	462.69
SWPW-2	8/21/06 21:55	433.69	SWPW-1	10/4/06 22:55	462.72
SWPW-2	8/21/06 22:00	433.70	SWPW-1	10/4/06 23:00	462.74
SWPW-2	8/21/06 22:05	433.70	SWPW-1	10/4/06 23:05	462.69
SWPW-2	8/21/06 22:10	433.70	SWPW-1	10/4/06 23:10	462.71
SWPW-2	8/21/06 22:15	433.68	SWPW-1	10/4/06 23:15	462.70
SWPW-2	8/21/06 22:20	433.64	SWPW-1	10/4/06 23:20	462.72
SWPW-2	8/21/06 22:25	433.69	SWPW-1	10/4/06 23:25	462.73
SWPW-2	8/21/06 22:30	433.67	SWPW-1	10/4/06 23:30	462.70
SWPW-2	8/21/06 22:35	433.69	SWPW-1	10/4/06 23:35	462.69
SWPW-2	8/21/06 22:40	433.69	SWPW-1	10/4/06 23:40	462.72
SWPW-2	8/21/06 22:45	433.69	SWPW-1	10/4/06 23:45	462.69
SWPW-2	8/21/06 22:50	433.68	SWPW-1	10/4/06 23:50	462.69
SWPW-2	8/21/06 22:55	433.69	SWPW-1	10/4/06 23:55	462.69
SWPW-2	8/21/06 23:00	433.68	SWPW-1	10/5/06 0:00	462.69
SWPW-2	8/21/06 23:05	433.71	SWPW-1	10/5/06 0:05	462.68
SWPW-2	8/21/06 23:10	433.67	SWPW-1	10/5/06 0:10	462.72
SWPW-2	8/21/06 23:15	433.67	SWPW-1	10/5/06 0:15	462.72

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	8/21/06 23:20	433.67	SWPW-1	10/5/06 0:20	462.72
SWPW-2	8/21/06 23:25	433.67	SWPW-1	10/5/06 0:25	462.68
SWPW-2	8/21/06 23:30	433.67	SWPW-1	10/5/06 0:30	462.69
SWPW-2	8/21/06 23:35	433.69	SWPW-1	10/5/06 0:35	462.69
SWPW-2	8/21/06 23:40	433.68	SWPW-1	10/5/06 0:40	462.71
SWPW-2	8/21/06 23:45	433.68	SWPW-1	10/5/06 0:45	462.71
SWPW-2	8/21/06 23:50	433.69	SWPW-1	10/5/06 0:50	462.68
SWPW-2	8/21/06 23:55	433.69	SWPW-1	10/5/06 0:55	462.68
SWPW-2	8/22/06 0:00	433.68	SWPW-1	10/5/06 1:00	462.68
SWPW-2	8/22/06 0:05	433.66	SWPW-1	10/5/06 1:05	462.68
SWPW-2	8/22/06 0:10	433.67	SWPW-1	10/5/06 1:10	462.68
SWPW-2	8/22/06 0:15	433.66	SWPW-1	10/5/06 1:15	462.68
SWPW-2	8/22/06 0:20	433.66	SWPW-1	10/5/06 1:20	462.68
SWPW-2	8/22/06 0:25	433.67	SWPW-1	10/5/06 1:25	462.69
SWPW-2	8/22/06 0:30	433.66	SWPW-1	10/5/06 1:30	462.67
SWPW-2	8/22/06 0:35	433.66	SWPW-1	10/5/06 1:35	462.71
SWPW-2	8/22/06 0:40	433.66	SWPW-1	10/5/06 1:40	462.68
SWPW-2	8/22/06 0:45	433.65	SWPW-1	10/5/06 1:45	462.68
SWPW-2	8/22/06 0:50	433.65	SWPW-1	10/5/06 1:50	462.71
SWPW-2	8/22/06 0:55	433.68	SWPW-1	10/5/06 1:55	462.67
SWPW-2	8/22/06 1:00	433.67	SWPW-1	10/5/06 2:00	462.67
SWPW-2	8/22/06 1:05	433.68	SWPW-1	10/5/06 2:05	462.70
SWPW-2	8/22/06 1:10	433.67	SWPW-1	10/5/06 2:10	462.66
SWPW-2	8/22/06 1:15	433.67	SWPW-1	10/5/06 2:15	462.67
SWPW-2	8/22/06 1:20	433.67	SWPW-1	10/5/06 2:20	462.67
SWPW-2	8/22/06 1:25	433.66	SWPW-1	10/5/06 2:25	462.66
SWPW-2	8/22/06 1:30	433.67	SWPW-1	10/5/06 2:30	462.68
SWPW-2	8/22/06 1:35	433.67	SWPW-1	10/5/06 2:35	462.66
SWPW-2	8/22/06 1:40	433.66	SWPW-1	10/5/06 2:40	462.65
SWPW-2	8/22/06 1:45	433.66	SWPW-1	10/5/06 2:45	462.66
SWPW-2	8/22/06 1:50	433.66	SWPW-1	10/5/06 2:50	462.65
SWPW-2	8/22/06 1:55	433.65	SWPW-1	10/5/06 2:55	462.68
SWPW-2	8/22/06 2:00	433.65	SWPW-1	10/5/06 3:00	462.65
SWPW-2	8/22/06 2:05	433.64	SWPW-1	10/5/06 3:05	462.71
SWPW-2	8/22/06 2:10	433.64	SWPW-1	10/5/06 3:10	462.66
SWPW-2	8/22/06 2:15	433.64	SWPW-1	10/5/06 3:15	462.69
SWPW-2	8/22/06 2:20	433.66	SWPW-1	10/5/06 3:20	462.68
SWPW-2	8/22/06 2:25	433.64	SWPW-1	10/5/06 3:25	462.66
SWPW-2	8/22/06 2:30	433.64	SWPW-1	10/5/06 3:30	462.65
SWPW-2	8/22/06 2:35	433.64	SWPW-1	10/5/06 3:35	462.68
SWPW-2	8/22/06 2:40	433.64	SWPW-1	10/5/06 3:40	462.68
SWPW-2	8/22/06 2:45	433.64	SWPW-1	10/5/06 3:45	462.65
SWPW-2	8/22/06 2:50	433.68	SWPW-1	10/5/06 3:50	462.65
SWPW-2	8/22/06 2:55	433.66	SWPW-1	10/5/06 3:55	462.64
SWPW-2	8/22/06 3:00	433.65	SWPW-1	10/5/06 4:00	462.67
SWPW-2	8/22/06 3:05	433.65	SWPW-1	10/5/06 4:05	462.64
SWPW-2	8/22/06 3:10	433.65	SWPW-1	10/5/06 4:10	462.64
SWPW-2	8/22/06 3:15	433.64	SWPW-1	10/5/06 4:15	462.63
SWPW-2	8/22/06 3:20	433.65	SWPW-1	10/5/06 4:20	462.65
SWPW-2	8/22/06 3:25	433.65	SWPW-1	10/5/06 4:25	462.67
SWPW-2	8/22/06 3:30	433.65	SWPW-1	10/5/06 4:30	462.64
SWPW-2	8/22/06 3:35	433.62	SWPW-1	10/5/06 4:35	462.67
SWPW-2	8/22/06 3:40	433.65	SWPW-1	10/5/06 4:40	462.67
SWPW-2	8/22/06 3:45	433.63	SWPW-1	10/5/06 4:45	462.64
SWPW-2	8/22/06 3:50	433.60	SWPW-1	10/5/06 4:50	462.65
SWPW-2	8/22/06 3:55	433.65	SWPW-1	10/5/06 4:55	462.63
SWPW-2	8/22/06 4:00	433.63	SWPW-1	10/5/06 5:00	462.63
SWPW-2	8/22/06 4:05	433.64	SWPW-1	10/5/06 5:05	462.63
SWPW-2	8/22/06 4:10	433.65	SWPW-1	10/5/06 5:10	462.66
SWPW-2	8/22/06 4:15	433.67	SWPW-1	10/5/06 5:15	462.66
SWPW-2	8/22/06 4:20	433.63	SWPW-1	10/5/06 5:20	462.67
SWPW-2	8/22/06 4:25	433.64	SWPW-1	10/5/06 5:25	462.65
SWPW-2	8/22/06 4:30	433.63	SWPW-1	10/5/06 5:30	462.63
SWPW-2	8/22/06 4:35	433.62	SWPW-1	10/5/06 5:35	462.67
SWPW-2	8/22/06 4:40	433.63	SWPW-1	10/5/06 5:40	462.64
SWPW-2	8/22/06 4:45	433.63	SWPW-1	10/5/06 5:45	462.64
SWPW-2	8/22/06 4:50	433.65	SWPW-1	10/5/06 5:50	462.64
SWPW-2	8/22/06 4:55	433.61	SWPW-1	10/5/06 5:55	462.64
SWPW-2	8/22/06 5:00	433.60	SWPW-1	10/5/06 6:00	462.67
SWPW-2	8/22/06 5:05	433.60	SWPW-1	10/5/06 6:05	462.63
SWPW-2	8/22/06 5:10	433.61	SWPW-1	10/5/06 6:10	462.65
SWPW-2	8/22/06 5:15	433.64	SWPW-1	10/5/06 6:15	462.64
SWPW-2	8/22/06 5:20	433.60	SWPW-1	10/5/06 6:20	462.63
SWPW-2	8/22/06 5:25	433.64	SWPW-1	10/5/06 6:25	462.63
SWPW-2	8/22/06 5:30	433.59	SWPW-1	10/5/06 6:30	462.67
SWPW-2	8/22/06 5:35	433.63	SWPW-1	10/5/06 6:35	462.63
SWPW-2	8/22/06 5:40	433.64	SWPW-1	10/5/06 6:40	462.63
SWPW-2	8/22/06 5:45	433.63	SWPW-1	10/5/06 6:45	462.64
SWPW-2	8/22/06 5:50	433.62	SWPW-1	10/5/06 6:50	462.64
SWPW-2	8/22/06 5:55	433.63	SWPW-1	10/5/06 6:55	462.67
SWPW-2	8/22/06 6:00	433.59	SWPW-1	10/5/06 7:00	462.68
SWPW-2	8/22/06 6:05	433.64	SWPW-1	10/5/06 7:05	462.64
SWPW-2	8/22/06 6:10	433.64	SWPW-1	10/5/06 7:10	462.64
SWPW-2	8/22/06 6:15	433.62	SWPW-1	10/5/06 7:15	462.64
SWPW-2	8/22/06 6:20	433.62	SWPW-1	10/5/06 7:20	462.66
SWPW-2	8/22/06 6:25	433.63	SWPW-1	10/5/06 7:25	462.65
SWPW-2	8/22/06 6:30	433.64	SWPW-1	10/5/06 7:30	462.64
SWPW-2	8/22/06 6:35	433.61	SWPW-1	10/5/06 7:35	462.65
SWPW-2	8/22/06 6:40	433.65	SWPW-1	10/5/06 7:40	462.65
SWPW-2	8/22/06 6:45	433.64	SWPW-1	10/5/06 7:45	462.65
SWPW-2	8/22/06 6:50	433.62	SWPW-1	10/5/06 7:50	462.65
SWPW-2	8/22/06 6:55	433.62	SWPW-1	10/5/06 7:55	462.65
SWPW-2	8/22/06 7:00	433.64	SWPW-1	10/5/06 8:00	462.65
SWPW-2	8/22/06 7:05	433.64	SWPW-1	10/5/06 8:05	462.66
SWPW-2	8/22/06 7:10	433.64	SWPW-1	10/5/06 8:10	462.67
SWPW-2	8/22/06 7:15	433.63	SWPW-1	10/5/06 8:15	462.69
SWPW-2	8/22/06 7:20	433.63	SWPW-1	10/5/06 8:20	462.67
SWPW-2	8/22/06 7:25	433.64	SWPW-1	10/5/06 8:25	462.66
SWPW-2	8/22/06 7:30	433.64	SWPW-1	10/5/06 8:30	462.69
SWPW-2	8/22/06 7:35	433.65	SWPW-1	10/5/06 8:35	462.67

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	8/22/06 7:40	433.62	SWPW-1	10/5/06 8:40	462.67
SWPW-2	8/22/06 7:45	433.65	SWPW-1	10/5/06 8:45	462.67
SWPW-2	8/22/06 7:50	433.63	SWPW-1	10/5/06 8:50	462.69
SWPW-2	8/22/06 7:55	433.65	SWPW-1	10/5/06 8:55	462.66
SWPW-2	8/22/06 8:00	433.62	SWPW-1	10/5/06 9:00	462.70
SWPW-2	8/22/06 8:05	433.62	SWPW-1	10/5/06 9:05	462.71
SWPW-2	8/22/06 8:10	433.65	SWPW-1	10/5/06 9:10	462.68
SWPW-2	8/22/06 8:15	433.63	SWPW-1	10/5/06 9:15	462.70
SWPW-2	8/22/06 8:20	433.62	SWPW-1	10/5/06 9:20	462.67
SWPW-2	8/22/06 8:25	433.64	SWPW-1	10/5/06 9:25	462.71
SWPW-2	8/22/06 8:30	433.65	SWPW-1	10/5/06 9:30	462.71
SWPW-2	8/22/06 8:35	433.64	SWPW-1	10/5/06 9:35	462.72
SWPW-2	8/22/06 8:40	433.65	SWPW-1	10/5/06 9:40	462.70
SWPW-2	8/22/06 8:45	433.64	SWPW-1	10/5/06 9:45	462.68
SWPW-2	8/22/06 8:50	433.64	SWPW-1	10/5/06 9:50	462.68
SWPW-2	8/22/06 8:55	433.64	SWPW-1	10/5/06 9:55	462.69
SWPW-2	8/22/06 9:00	433.65	SWPW-1	10/5/06 10:00	462.67
SWPW-2	8/22/06 9:05	433.64	SWPW-1	10/5/06 10:05	462.72
SWPW-2	8/22/06 9:10	433.64	SWPW-1	10/5/06 10:10	462.69
SWPW-2	8/22/06 9:15	433.66	SWPW-1	10/5/06 10:15	462.72
SWPW-2	8/22/06 9:20	433.63	SWPW-1	10/5/06 10:20	462.69
SWPW-2	8/22/06 9:25	433.63	SWPW-1	10/5/06 10:25	462.68
SWPW-2	8/22/06 9:30	433.67	SWPW-1	10/5/06 10:30	462.72
SWPW-2	8/22/06 9:35	433.63	SWPW-1	10/5/06 10:35	462.72
SWPW-2	8/22/06 9:40	433.67	SWPW-1	10/5/06 10:40	462.72
SWPW-2	8/22/06 9:45	433.68	SWPW-1	10/5/06 10:45	462.72
SWPW-2	8/22/06 9:50	433.64	SWPW-1	10/5/06 10:50	462.70
SWPW-2	8/22/06 9:55	433.63	SWPW-1	10/5/06 10:55	462.73
SWPW-2	8/22/06 10:00	433.66	SWPW-1	10/5/06 11:00	462.73
SWPW-2	8/22/06 10:05	433.67	SWPW-1	10/5/06 11:05	462.73
SWPW-2	8/22/06 10:10	433.68	SWPW-1	10/5/06 11:10	462.71
SWPW-2	8/22/06 10:15	433.68	SWPW-1	10/5/06 11:15	462.69
SWPW-2	8/22/06 10:20	433.63	SWPW-1	10/5/06 11:20	462.69
SWPW-2	8/22/06 10:25	433.67	SWPW-1	10/5/06 11:25	462.69
SWPW-2	8/22/06 10:30	433.67	SWPW-1	10/5/06 11:30	462.69
SWPW-2	8/22/06 10:35	433.67	SWPW-1	10/5/06 11:35	462.68
SWPW-2	8/22/06 10:40	433.65	SWPW-1	10/5/06 11:40	462.70
SWPW-2	8/22/06 10:45	433.68	SWPW-1	10/5/06 11:45	462.70
SWPW-2	8/22/06 10:50	433.65	SWPW-1	10/5/06 11:50	462.69
SWPW-2	8/22/06 10:55	433.65	SWPW-1	10/5/06 11:55	462.70
SWPW-2	8/22/06 11:00	433.68	SWPW-1	10/5/06 12:00	462.69
SWPW-2	8/22/06 11:05	433.68	SWPW-1	10/5/06 12:05	462.71
SWPW-2	8/22/06 11:10	433.66	SWPW-1	10/5/06 12:10	462.68
SWPW-2	8/22/06 11:15	433.67	SWPW-1	10/5/06 12:15	462.69
SWPW-2	8/22/06 11:20	433.66	SWPW-1	10/5/06 12:20	462.68
SWPW-2	8/22/06 11:25	433.66	SWPW-1	10/5/06 12:25	462.68
SWPW-2	8/22/06 11:30	433.66	SWPW-1	10/5/06 12:30	462.69
SWPW-2	8/22/06 11:35	433.67	SWPW-1	10/5/06 12:35	462.68
SWPW-2	8/22/06 11:40	433.69	SWPW-1	10/5/06 12:40	462.67
SWPW-2	8/22/06 11:45	433.65	SWPW-1	10/5/06 12:45	462.67
SWPW-2	8/22/06 11:50	433.69	SWPW-1	10/5/06 12:50	462.71
SWPW-2	8/22/06 11:55	433.66	SWPW-1	10/5/06 12:55	462.67
SWPW-2	8/22/06 12:00	433.67	SWPW-1	10/5/06 13:00	462.70
SWPW-2	8/22/06 12:05	433.66	SWPW-1	10/5/06 13:05	462.68
SWPW-2	8/22/06 12:10	433.65	SWPW-1	10/5/06 13:10	462.69
SWPW-2	8/22/06 12:15	433.65	SWPW-1	10/5/06 13:15	462.70
SWPW-2	8/22/06 12:20	433.66	SWPW-1	10/5/06 13:20	462.67
SWPW-2	8/22/06 12:25	433.66	SWPW-1	10/5/06 13:25	462.66
SWPW-2	8/22/06 12:30	433.66	SWPW-1	10/5/06 13:30	462.67
SWPW-2	8/22/06 12:35	433.66	SWPW-1	10/5/06 13:35	462.69
SWPW-2	8/22/06 12:40	433.66	SWPW-1	10/5/06 13:40	462.65
SWPW-2	8/22/06 12:45	433.65	SWPW-1	10/5/06 13:45	462.69
SWPW-2	8/22/06 12:50	433.69	SWPW-1	10/5/06 13:50	462.69
SWPW-2	8/22/06 12:55	433.68	SWPW-1	10/5/06 13:55	462.65
SWPW-2	8/22/06 13:00	433.69	SWPW-1	10/5/06 14:00	462.66
SWPW-2	8/22/06 13:05	433.66	SWPW-1	10/5/06 14:05	462.69
SWPW-2	8/22/06 13:10	433.65	SWPW-1	10/5/06 14:10	462.64
SWPW-2	8/22/06 13:15	433.64	SWPW-1	10/5/06 14:15	462.65
SWPW-2	8/22/06 13:20	433.65	SWPW-1	10/5/06 14:20	462.67
SWPW-2	8/22/06 13:25	433.66	SWPW-1	10/5/06 14:25	462.63
SWPW-2	8/22/06 13:30	433.64	SWPW-1	10/5/06 14:30	462.67
SWPW-2	8/22/06 13:35	433.64	SWPW-1	10/5/06 14:35	462.67
SWPW-2	8/22/06 13:40	433.64	SWPW-1	10/5/06 14:40	462.65
SWPW-2	8/22/06 13:45	433.63	SWPW-1	10/5/06 14:45	462.66
SWPW-2	8/22/06 13:50	433.62	SWPW-1	10/5/06 14:50	462.63
SWPW-2	8/22/06 13:55	433.66	SWPW-1	10/5/06 14:55	462.63
SWPW-2	8/22/06 14:00	433.64	SWPW-1	10/5/06 15:00	462.63
SWPW-2	8/22/06 14:05	433.64	SWPW-1	10/5/06 15:05	462.63
SWPW-2	8/22/06 14:10	433.67	SWPW-1	10/5/06 15:10	462.66
SWPW-2	8/22/06 14:15	433.62	SWPW-1	10/5/06 15:15	462.66
SWPW-2	8/22/06 14:20	433.67	SWPW-1	10/5/06 15:20	462.63
SWPW-2	8/22/06 14:25	433.62	SWPW-1	10/5/06 15:25	462.62
SWPW-2	8/22/06 14:30	433.63	SWPW-1	10/5/06 15:30	462.65
SWPW-2	8/22/06 14:35	433.62	SWPW-1	10/5/06 15:35	462.62
SWPW-2	8/22/06 14:40	433.61	SWPW-1	10/5/06 15:40	462.60
SWPW-2	8/22/06 14:45	433.61	SWPW-1	10/5/06 15:45	462.65
SWPW-2	8/22/06 14:50	433.62	SWPW-1	10/5/06 15:50	462.62
SWPW-2	8/22/06 14:55	433.63	SWPW-1	10/5/06 15:55	462.61
SWPW-2	8/22/06 15:00	433.61	SWPW-1	10/5/06 16:00	462.62
SWPW-2	8/22/06 15:05	433.65	SWPW-1	10/5/06 16:05	462.62
SWPW-2	8/22/06 15:10	433.64	SWPW-1	10/5/06 16:10	462.62
SWPW-2	8/22/06 15:15	433.60	SWPW-1	10/5/06 16:15	462.60
SWPW-2	8/22/06 15:20	433.57	SWPW-1	10/5/06 16:20	462.60
SWPW-2	8/22/06 15:25	433.62	SWPW-1	10/5/06 16:25	462.63
SWPW-2	8/22/06 15:30	433.60	SWPW-1	10/5/06 16:30	462.64
SWPW-2	8/22/06 15:35	433.60	SWPW-1	10/5/06 16:35	462.60
SWPW-2	8/22/06 15:40	433.61	SWPW-1	10/5/06 16:40	462.60
SWPW-2	8/22/06 15:45	433.60	SWPW-1	10/5/06 16:45	462.60
SWPW-2	8/22/06 15:50	433.60	SWPW-1	10/5/06 16:50	462.59
SWPW-2	8/22/06 15:55	433.60	SWPW-1	10/5/06 16:55	462.63

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	8/22/06 16:00	433.62	SWPW-1	10/5/06 17:00	462.63
SWPW-2	8/22/06 16:05	433.59	SWPW-1	10/5/06 17:05	462.59
SWPW-2	8/22/06 16:10	433.58	SWPW-1	10/5/06 17:10	462.60
SWPW-2	8/22/06 16:15	433.61	SWPW-1	10/5/06 17:15	462.62
SWPW-2	8/22/06 16:20	433.59	SWPW-1	10/5/06 17:20	462.59
SWPW-2	8/22/06 16:25	433.60	SWPW-1	10/5/06 17:25	462.59
SWPW-2	8/22/06 16:30	433.59	SWPW-1	10/5/06 17:30	462.59
SWPW-2	8/22/06 16:35	433.59	SWPW-1	10/5/06 17:35	462.59
SWPW-2	8/22/06 16:40	433.59	SWPW-1	10/5/06 17:40	462.59
SWPW-2	8/22/06 16:45	433.60	SWPW-1	10/5/06 17:45	462.59
SWPW-2	8/22/06 16:50	433.61	SWPW-1	10/5/06 17:50	462.58
SWPW-2	8/22/06 16:55	433.59	SWPW-1	10/5/06 17:55	462.62
SWPW-2	8/22/06 17:00	433.59	SWPW-1	10/5/06 18:00	462.61
SWPW-2	8/22/06 17:05	433.58	SWPW-1	10/5/06 18:05	462.58
SWPW-2	8/22/06 17:10	433.62	SWPW-1	10/5/06 18:10	462.58
SWPW-2	8/22/06 17:15	433.59	SWPW-1	10/5/06 18:15	462.62
SWPW-2	8/22/06 17:20	433.58	SWPW-1	10/5/06 18:20	462.61
SWPW-2	8/22/06 17:25	433.55	SWPW-1	10/5/06 18:25	462.62
SWPW-2	8/22/06 17:30	433.58	SWPW-1	10/5/06 18:30	462.59
SWPW-2	8/22/06 17:35	433.57	SWPW-1	10/5/06 18:35	462.59
SWPW-2	8/22/06 17:40	433.57	SWPW-1	10/5/06 18:40	462.59
SWPW-2	8/22/06 17:45	433.56	SWPW-1	10/5/06 18:45	462.59
SWPW-2	8/22/06 17:50	433.57	SWPW-1	10/5/06 18:50	462.59
SWPW-2	8/22/06 17:55	433.57	SWPW-1	10/5/06 18:55	462.59
SWPW-2	8/22/06 18:00	433.56	SWPW-1	10/5/06 19:00	462.60
SWPW-2	8/22/06 18:05	433.60	SWPW-1	10/5/06 19:05	462.61
SWPW-2	8/22/06 18:10	433.56	SWPW-1	10/5/06 19:10	462.59
SWPW-2	8/22/06 18:15	433.57	SWPW-1	10/5/06 19:15	462.61
SWPW-2	8/22/06 18:20	433.56	SWPW-1	10/5/06 19:20	462.58
SWPW-2	8/22/06 18:25	433.56	SWPW-1	10/5/06 19:25	462.59
SWPW-2	8/22/06 18:30	433.55	SWPW-1	10/5/06 19:30	462.64
SWPW-2	8/22/06 18:35	433.55	SWPW-1	10/5/06 19:35	462.60
SWPW-2	8/22/06 18:40	433.55	SWPW-1	10/5/06 19:40	462.62
SWPW-2	8/22/06 18:45	433.55	SWPW-1	10/5/06 19:45	462.59
SWPW-2	8/22/06 18:50	433.55	SWPW-1	10/5/06 19:50	462.62
SWPW-2	8/22/06 18:55	433.55	SWPW-1	10/5/06 19:55	462.60
SWPW-2	8/22/06 19:00	433.55	SWPW-1	10/5/06 20:00	462.63
SWPW-2	8/22/06 19:05	433.59	SWPW-1	10/5/06 20:05	462.60
SWPW-2	8/22/06 19:10	433.59	SWPW-1	10/5/06 20:10	462.59
SWPW-2	8/22/06 19:15	433.59	SWPW-1	10/5/06 20:15	462.62
SWPW-2	8/22/06 19:20	433.55	SWPW-1	10/5/06 20:20	462.60
SWPW-2	8/22/06 19:25	433.56	SWPW-1	10/5/06 20:25	462.63
SWPW-2	8/22/06 19:30	433.55	SWPW-1	10/5/06 20:30	462.60
SWPW-2	8/22/06 19:35	433.55	SWPW-1	10/5/06 20:35	462.61
SWPW-2	8/22/06 19:40	433.61	SWPW-1	10/5/06 20:40	462.61
SWPW-2	8/22/06 19:45	433.57	SWPW-1	10/5/06 20:45	462.61
SWPW-2	8/22/06 19:50	433.57	SWPW-1	10/5/06 20:50	462.64
SWPW-2	8/22/06 19:55	433.57	SWPW-1	10/5/06 20:55	462.64
SWPW-2	8/22/06 20:00	433.57	SWPW-1	10/5/06 21:00	462.61
SWPW-2	8/22/06 20:05	433.56	SWPW-1	10/5/06 21:05	462.62
SWPW-2	8/22/06 20:10	433.56	SWPW-1	10/5/06 21:10	462.62
SWPW-2	8/22/06 20:15	433.56	SWPW-1	10/5/06 21:15	462.61
SWPW-2	8/22/06 20:20	433.56	SWPW-1	10/5/06 21:20	462.61
SWPW-2	8/22/06 20:25	433.56	SWPW-1	10/5/06 21:25	462.61
SWPW-2	8/22/06 20:30	433.57	SWPW-1	10/5/06 21:30	462.61
SWPW-2	8/22/06 20:35	433.57	SWPW-1	10/5/06 21:35	462.66
SWPW-2	8/22/06 20:40	433.56	SWPW-1	10/5/06 21:40	462.62
SWPW-2	8/22/06 20:45	433.57	SWPW-1	10/5/06 21:45	462.62
SWPW-2	8/22/06 20:50	433.60	SWPW-1	10/5/06 21:50	462.65
SWPW-2	8/22/06 20:55	433.57	SWPW-1	10/5/06 21:55	462.62
SWPW-2	8/22/06 21:00	433.60	SWPW-1	10/5/06 22:00	462.62
SWPW-2	8/22/06 21:05	433.60	SWPW-1	10/5/06 22:05	462.63
SWPW-2	8/22/06 21:10	433.57	SWPW-1	10/5/06 22:10	462.67
SWPW-2	8/22/06 21:15	433.60	SWPW-1	10/5/06 22:15	462.62
SWPW-2	8/22/06 21:20	433.60	SWPW-1	10/5/06 22:20	462.65
SWPW-2	8/22/06 21:25	433.60	SWPW-1	10/5/06 22:25	462.62
SWPW-2	8/22/06 21:30	433.58	SWPW-1	10/5/06 22:30	462.62
SWPW-2	8/22/06 21:35	433.58	SWPW-1	10/5/06 22:35	462.63
SWPW-2	8/22/06 21:40	433.58	SWPW-1	10/5/06 22:40	462.61
SWPW-2	8/22/06 21:45	433.58	SWPW-1	10/5/06 22:45	462.63
SWPW-2	8/22/06 21:50	433.58	SWPW-1	10/5/06 22:50	462.62
SWPW-2	8/22/06 21:55	433.58	SWPW-1	10/5/06 22:55	462.66
SWPW-2	8/22/06 22:00	433.58	SWPW-1	10/5/06 23:00	462.63
SWPW-2	8/22/06 22:05	433.58	SWPW-1	10/5/06 23:05	462.62
SWPW-2	8/22/06 22:10	433.62	SWPW-1	10/5/06 23:10	462.63
SWPW-2	8/22/06 22:15	433.58	SWPW-1	10/5/06 23:15	462.63
SWPW-2	8/22/06 22:20	433.58	SWPW-1	10/5/06 23:20	462.62
SWPW-2	8/22/06 22:25	433.58	SWPW-1	10/5/06 23:25	462.66
SWPW-2	8/22/06 22:30	433.58	SWPW-1	10/5/06 23:30	462.62
SWPW-2	8/22/06 22:35	433.57	SWPW-1	10/5/06 23:35	462.62
SWPW-2	8/22/06 22:40	433.57	SWPW-1	10/5/06 23:40	462.62
SWPW-2	8/22/06 22:45	433.61	SWPW-1	10/5/06 23:45	462.66
SWPW-2	8/22/06 22:50	433.57	SWPW-1	10/5/06 23:50	462.66
SWPW-2	8/22/06 22:55	433.57	SWPW-1	10/5/06 23:55	462.65
SWPW-2	8/22/06 23:00	433.57	SWPW-1	10/6/06 0:00	462.67
SWPW-2	8/22/06 23:05	433.58	SWPW-1	10/6/06 0:05	462.65
SWPW-2	8/22/06 23:10	433.57	SWPW-1	10/6/06 0:10	462.65
SWPW-2	8/22/06 23:15	433.62	SWPW-1	10/6/06 0:15	462.65
SWPW-2	8/22/06 23:20	433.57	SWPW-1	10/6/06 0:20	462.62
SWPW-2	8/22/06 23:25	433.57	SWPW-1	10/6/06 0:25	462.65
SWPW-2	8/22/06 23:30	433.58	SWPW-1	10/6/06 0:30	462.63
SWPW-2	8/22/06 23:35	433.58	SWPW-1	10/6/06 0:35	462.65
SWPW-2	8/22/06 23:40	433.57	SWPW-1	10/6/06 0:40	462.63
SWPW-2	8/22/06 23:45	433.57	SWPW-1	10/6/06 0:45	462.62
SWPW-2	8/22/06 23:50	433.56	SWPW-1	10/6/06 0:50	462.66
SWPW-2	8/22/06 23:55	433.56	SWPW-1	10/6/06 0:55	462.63
SWPW-2	8/23/06 0:00	433.60	SWPW-1	10/6/06 1:00	462.62
SWPW-2	8/23/06 0:05	433.57	SWPW-1	10/6/06 1:05	462.66
SWPW-2	8/23/06 0:10	433.60	SWPW-1	10/6/06 1:10	462.62
SWPW-2	8/23/06 0:15	433.59	SWPW-1	10/6/06 1:15	462.62

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	8/23/06 0:20	433.60	SWPW-1	10/6/06 1:20	462.62
SWPW-2	8/23/06 0:25	433.61	SWPW-1	10/6/06 1:25	462.65
SWPW-2	8/23/06 0:30	433.57	SWPW-1	10/6/06 1:30	462.61
SWPW-2	8/23/06 0:35	433.60	SWPW-1	10/6/06 1:35	462.65
SWPW-2	8/23/06 0:40	433.56	SWPW-1	10/6/06 1:40	462.61
SWPW-2	8/23/06 0:45	433.57	SWPW-1	10/6/06 1:45	462.61
SWPW-2	8/23/06 0:50	433.61	SWPW-1	10/6/06 1:50	462.60
SWPW-2	8/23/06 0:55	433.62	SWPW-1	10/6/06 1:55	462.60
SWPW-2	8/23/06 1:00	433.57	SWPW-1	10/6/06 2:00	462.60
SWPW-2	8/23/06 1:05	433.60	SWPW-1	10/6/06 2:05	462.63
SWPW-2	8/23/06 1:10	433.60	SWPW-1	10/6/06 2:10	462.60
SWPW-2	8/23/06 1:15	433.59	SWPW-1	10/6/06 2:15	462.60
SWPW-2	8/23/06 1:20	433.57	SWPW-1	10/6/06 2:20	462.62
SWPW-2	8/23/06 1:25	433.60	SWPW-1	10/6/06 2:25	462.59
SWPW-2	8/23/06 1:30	433.59	SWPW-1	10/6/06 2:30	462.61
SWPW-2	8/23/06 1:35	433.59	SWPW-1	10/6/06 2:35	462.60
SWPW-2	8/23/06 1:40	433.55	SWPW-1	10/6/06 2:40	462.63
SWPW-2	8/23/06 1:45	433.59	SWPW-1	10/6/06 2:45	462.60
SWPW-2	8/23/06 1:50	433.59	SWPW-1	10/6/06 2:50	462.62
SWPW-2	8/23/06 1:55	433.60	SWPW-1	10/6/06 2:55	462.59
SWPW-2	8/23/06 2:00	433.57	SWPW-1	10/6/06 3:00	462.62
SWPW-2	8/23/06 2:05	433.60	SWPW-1	10/6/06 3:05	462.58
SWPW-2	8/23/06 2:10	433.58	SWPW-1	10/6/06 3:10	462.58
SWPW-2	8/23/06 2:15	433.58	SWPW-1	10/6/06 3:15	462.61
SWPW-2	8/23/06 2:20	433.58	SWPW-1	10/6/06 3:20	462.58
SWPW-2	8/23/06 2:25	433.57	SWPW-1	10/6/06 3:25	462.60
SWPW-2	8/23/06 2:30	433.55	SWPW-1	10/6/06 3:30	462.57
SWPW-2	8/23/06 2:35	433.55	SWPW-1	10/6/06 3:35	462.61
SWPW-2	8/23/06 2:40	433.59	SWPW-1	10/6/06 3:40	462.58
SWPW-2	8/23/06 2:45	433.56	SWPW-1	10/6/06 3:45	462.60
SWPW-2	8/23/06 2:50	433.57	SWPW-1	10/6/06 3:50	462.57
SWPW-2	8/23/06 2:55	433.55	SWPW-1	10/6/06 3:55	462.57
SWPW-2	8/23/06 3:00	433.59	SWPW-1	10/6/06 4:00	462.57
SWPW-2	8/23/06 3:05	433.60	SWPW-1	10/6/06 4:05	462.57
SWPW-2	8/23/06 3:10	433.59	SWPW-1	10/6/06 4:10	462.56
SWPW-2	8/23/06 3:15	433.54	SWPW-1	10/6/06 4:15	462.58
SWPW-2	8/23/06 3:20	433.59	SWPW-1	10/6/06 4:20	462.59
SWPW-2	8/23/06 3:25	433.57	SWPW-1	10/6/06 4:25	462.55
SWPW-2	8/23/06 3:30	433.55	SWPW-1	10/6/06 4:30	462.58
SWPW-2	8/23/06 3:35	433.60	SWPW-1	10/6/06 4:35	462.57
SWPW-2	8/23/06 3:40	433.61	SWPW-1	10/6/06 4:40	462.54
SWPW-2	8/23/06 3:45	433.56	SWPW-1	10/6/06 4:45	462.54
SWPW-2	8/23/06 3:50	433.56	SWPW-1	10/6/06 4:50	462.54
SWPW-2	8/23/06 3:55	433.56	SWPW-1	10/6/06 4:55	462.58
SWPW-2	8/23/06 4:00	433.59	SWPW-1	10/6/06 5:00	462.55
SWPW-2	8/23/06 4:05	433.60	SWPW-1	10/6/06 5:05	462.58
SWPW-2	8/23/06 4:10	433.56	SWPW-1	10/6/06 5:10	462.59
SWPW-2	8/23/06 4:15	433.55	SWPW-1	10/6/06 5:15	462.54
SWPW-2	8/23/06 4:20	433.55	SWPW-1	10/6/06 5:20	462.54
SWPW-2	8/23/06 4:25	433.56	SWPW-1	10/6/06 5:25	462.58
SWPW-2	8/23/06 4:30	433.56	SWPW-1	10/6/06 5:30	462.54
SWPW-2	8/23/06 4:35	433.56	SWPW-1	10/6/06 5:35	462.54
SWPW-2	8/23/06 4:40	433.54	SWPW-1	10/6/06 5:40	462.55
SWPW-2	8/23/06 4:45	433.54	SWPW-1	10/6/06 5:45	462.54
SWPW-2	8/23/06 4:50	433.55	SWPW-1	10/6/06 5:50	462.54
SWPW-2	8/23/06 4:55	433.55	SWPW-1	10/6/06 5:55	462.58
SWPW-2	8/23/06 5:00	433.56	SWPW-1	10/6/06 6:00	462.53
SWPW-2	8/23/06 5:05	433.54	SWPW-1	10/6/06 6:05	462.53
SWPW-2	8/23/06 5:10	433.55	SWPW-1	10/6/06 6:10	462.55
SWPW-2	8/23/06 5:15	433.56	SWPW-1	10/6/06 6:15	462.55
SWPW-2	8/23/06 5:20	433.56	SWPW-1	10/6/06 6:20	462.54
SWPW-2	8/23/06 5:25	433.57	SWPW-1	10/6/06 6:25	462.53
SWPW-2	8/23/06 5:30	433.56	SWPW-1	10/6/06 6:30	462.54
SWPW-2	8/23/06 5:35	433.56	SWPW-1	10/6/06 6:35	462.57
SWPW-2	8/23/06 5:40	433.56	SWPW-1	10/6/06 6:40	462.53
SWPW-2	8/23/06 5:45	433.55	SWPW-1	10/6/06 6:45	462.54
SWPW-2	8/23/06 5:50	433.58	SWPW-1	10/6/06 6:50	462.54
SWPW-2	8/23/06 5:55	433.54	SWPW-1	10/6/06 6:55	462.57
SWPW-2	8/23/06 6:00	433.55	SWPW-1	10/6/06 7:00	462.53
SWPW-2	8/23/06 6:05	433.56	SWPW-1	10/6/06 7:05	462.54
SWPW-2	8/23/06 6:10	433.54	SWPW-1	10/6/06 7:10	462.54
SWPW-2	8/23/06 6:15	433.55	SWPW-1	10/6/06 7:15	462.54
SWPW-2	8/23/06 6:20	433.56	SWPW-1	10/6/06 7:20	462.55
SWPW-2	8/23/06 6:25	433.56	SWPW-1	10/6/06 7:25	462.55
SWPW-2	8/23/06 6:30	433.55	SWPW-1	10/6/06 7:30	462.55
SWPW-2	8/23/06 6:35	433.56	SWPW-1	10/6/06 7:35	462.55
SWPW-2	8/23/06 6:40	433.55	SWPW-1	10/6/06 7:40	462.57
SWPW-2	8/23/06 6:45	433.58	SWPW-1	10/6/06 7:45	462.58
SWPW-2	8/23/06 6:50	433.54	SWPW-1	10/6/06 7:50	462.55
SWPW-2	8/23/06 6:55	433.54	SWPW-1	10/6/06 7:55	462.56
SWPW-2	8/23/06 7:00	433.55	SWPW-1	10/6/06 8:00	462.54
SWPW-2	8/23/06 7:05	433.59	SWPW-1	10/6/06 8:05	462.55
SWPW-2	8/23/06 7:10	433.55	SWPW-1	10/6/06 8:10	462.54
SWPW-2	8/23/06 7:15	472.59	SWPW-1	10/6/06 8:15	462.54
SWPW-2	8/23/06 7:20	456.29	SWPW-1	10/6/06 8:20	462.58
SWPW-2	8/23/06 7:25	458.42	SWPW-1	10/6/06 8:25	462.55
SWPW-2	8/23/06 7:30	459.58	SWPW-1	10/6/06 8:30	462.56
SWPW-2	8/23/06 7:35	460.91	SWPW-1	10/6/06 8:35	462.56
SWPW-2	8/23/06 7:40	462.27	SWPW-1	10/6/06 8:40	462.55
SWPW-2	8/23/06 7:45	461.99	SWPW-1	10/6/06 8:45	462.60
SWPW-2	8/23/06 7:50	462.50	SWPW-1	10/6/06 8:50	462.58
SWPW-2	8/23/06 7:55	461.97	SWPW-1	10/6/06 8:55	462.60
SWPW-2	8/23/06 8:00	463.08	SWPW-1	10/6/06 9:00	498.77
SWPW-2	8/23/06 8:05	464.00	SWPW-1	10/6/06 9:05	513.39
SWPW-2	8/23/06 8:10	465.08	SWPW-1	10/6/06 9:10	515.24
SWPW-2	8/23/06 8:15	463.84	SWPW-1	10/6/06 9:15	515.95
SWPW-2	8/23/06 8:20	465.60	SWPW-1	10/6/06 9:20	517.05
SWPW-2	8/23/06 8:25	464.63	SWPW-1	10/6/06 9:25	517.40
SWPW-2	8/23/06 8:30	465.91	SWPW-1	10/6/06 9:30	517.98
SWPW-2	8/23/06 8:35	465.37	SWPW-1	10/6/06 9:35	518.47

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	8/23/06 8:40	465.83	SWPW-1	10/6/06 9:40	518.36
SWPW-2	8/23/06 8:45	466.30	SWPW-1	10/6/06 9:45	518.94
SWPW-2	8/23/06 8:50	468.04	SWPW-1	10/6/06 9:50	519.11
SWPW-2	8/23/06 8:55	466.37	SWPW-1	10/6/06 9:55	519.15
SWPW-2	8/23/06 9:00	467.85	SWPW-1	10/6/06 10:00	519.78
SWPW-2	8/23/06 9:05	466.82	SWPW-1	10/6/06 10:05	519.62
SWPW-2	8/23/06 9:10	467.37	SWPW-1	10/6/06 10:10	519.86
SWPW-2	8/23/06 9:15	468.17	SWPW-1	10/6/06 10:15	520.26
SWPW-2	8/23/06 9:20	472.45	SWPW-1	10/6/06 10:20	520.19
SWPW-2	8/23/06 9:25	471.70	SWPW-1	10/6/06 10:25	520.62
SWPW-2	8/23/06 9:30	472.62	SWPW-1	10/6/06 10:30	520.28
SWPW-2	8/23/06 9:35	473.16	SWPW-1	10/6/06 10:35	520.43
SWPW-2	8/23/06 9:40	473.70	SWPW-1	10/6/06 10:40	520.73
SWPW-2	8/23/06 9:45	474.96	SWPW-1	10/6/06 10:45	520.64
SWPW-2	8/23/06 9:50	473.74	SWPW-1	10/6/06 10:50	520.93
SWPW-2	8/23/06 9:55	474.77	SWPW-1	10/6/06 10:55	520.90
SWPW-2	8/23/06 10:00	475.41	SWPW-1	10/6/06 11:00	520.97
SWPW-2	8/23/06 10:05	474.90	SWPW-1	10/6/06 11:05	521.15
SWPW-2	8/23/06 10:10	475.76	SWPW-1	10/6/06 11:10	521.36
SWPW-2	8/23/06 10:15	475.41	SWPW-1	10/6/06 11:15	521.42
SWPW-2	8/23/06 10:20	475.84	SWPW-1	10/6/06 11:20	521.37
SWPW-2	8/23/06 10:25	474.86	SWPW-1	10/6/06 11:25	521.70
SWPW-2	8/23/06 10:30	475.93	SWPW-1	10/6/06 11:30	521.82
SWPW-2	8/23/06 10:35	475.89	SWPW-1	10/6/06 11:35	521.79
SWPW-2	8/23/06 10:40	475.37	SWPW-1	10/6/06 11:40	521.97
SWPW-2	8/23/06 10:45	475.29	SWPW-1	10/6/06 11:45	522.19
SWPW-2	8/23/06 10:50	476.61	SWPW-1	10/6/06 11:50	522.16
SWPW-2	8/23/06 10:55	476.51	SWPW-1	10/6/06 11:55	522.08
SWPW-2	8/23/06 11:00	476.58	SWPW-1	10/6/06 12:00	522.30
SWPW-2	8/23/06 11:05	477.27	SWPW-1	10/6/06 12:05	522.25
SWPW-2	8/23/06 11:10	476.71	SWPW-1	10/6/06 12:10	522.56
SWPW-2	8/23/06 11:15	478.53	SWPW-1	10/6/06 12:15	522.33
SWPW-2	8/23/06 11:20	480.46	SWPW-1	10/6/06 12:20	522.68
SWPW-2	8/23/06 11:25	481.14	SWPW-1	10/6/06 12:25	522.48
SWPW-2	8/23/06 11:30	481.28	SWPW-1	10/6/06 12:30	522.66
SWPW-2	8/23/06 11:35	481.24	SWPW-1	10/6/06 12:35	522.79
SWPW-2	8/23/06 11:40	482.09	SWPW-1	10/6/06 12:40	522.80
SWPW-2	8/23/06 11:45	481.86	SWPW-1	10/6/06 12:45	522.93
SWPW-2	8/23/06 11:50	482.35	SWPW-1	10/6/06 12:50	522.73
SWPW-2	8/23/06 11:55	482.39	SWPW-1	10/6/06 12:55	522.92
SWPW-2	8/23/06 12:00	482.18	SWPW-1	10/6/06 13:00	523.13
SWPW-2	8/23/06 12:05	483.26	SWPW-1	10/6/06 13:05	522.90
SWPW-2	8/23/06 12:10	483.58	SWPW-1	10/6/06 13:10	522.83
SWPW-2	8/23/06 12:15	483.65	SWPW-1	10/6/06 13:15	523.30
SWPW-2	8/23/06 12:20	484.97	SWPW-1	10/6/06 13:20	523.04
SWPW-2	8/23/06 12:25	483.76	SWPW-1	10/6/06 13:25	523.32
SWPW-2	8/23/06 12:30	484.33	SWPW-1	10/6/06 13:30	523.07
SWPW-2	8/23/06 12:35	483.53	SWPW-1	10/6/06 13:35	523.14
SWPW-2	8/23/06 12:40	484.47	SWPW-1	10/6/06 13:40	523.06
SWPW-2	8/23/06 12:45	483.12	SWPW-1	10/6/06 13:45	523.41
SWPW-2	8/23/06 12:50	484.29	SWPW-1	10/6/06 13:50	523.36
SWPW-2	8/23/06 12:55	484.07	SWPW-1	10/6/06 13:55	523.37
SWPW-2	8/23/06 13:00	484.18	SWPW-1	10/6/06 14:00	523.60
SWPW-2	8/23/06 13:05	484.50	SWPW-1	10/6/06 14:05	523.28
SWPW-2	8/23/06 13:10	485.47	SWPW-1	10/6/06 14:10	523.38
SWPW-2	8/23/06 13:15	488.08	SWPW-1	10/6/06 14:15	523.72
SWPW-2	8/23/06 13:20	492.07	SWPW-1	10/6/06 14:20	523.61
SWPW-2	8/23/06 13:25	493.04	SWPW-1	10/6/06 14:25	523.47
SWPW-2	8/23/06 13:30	493.26	SWPW-1	10/6/06 14:30	523.73
SWPW-2	8/23/06 13:35	494.11	SWPW-1	10/6/06 14:35	523.78
SWPW-2	8/23/06 13:40	493.57	SWPW-1	10/6/06 14:40	523.51
SWPW-2	8/23/06 13:45	494.47	SWPW-1	10/6/06 14:45	524.08
SWPW-2	8/23/06 13:50	494.47	SWPW-1	10/6/06 14:50	523.81
SWPW-2	8/23/06 13:55	494.47	SWPW-1	10/6/06 14:55	523.71
SWPW-2	8/23/06 14:00	495.14	SWPW-1	10/6/06 15:00	523.55
SWPW-2	8/23/06 14:05	494.79	SWPW-1	10/6/06 15:05	523.99
SWPW-2	8/23/06 14:10	495.35	SWPW-1	10/6/06 15:10	523.95
SWPW-2	8/23/06 14:15	494.78	SWPW-1	10/6/06 15:15	524.01
SWPW-2	8/23/06 14:20	495.93	SWPW-1	10/6/06 15:20	523.86
SWPW-2	8/23/06 14:25	495.89	SWPW-1	10/6/06 15:25	524.04
SWPW-2	8/23/06 14:30	495.53	SWPW-1	10/6/06 15:30	524.33
SWPW-2	8/23/06 14:35	496.02	SWPW-1	10/6/06 15:35	523.90
SWPW-2	8/23/06 14:40	495.99	SWPW-1	10/6/06 15:40	524.09
SWPW-2	8/23/06 14:45	496.18	SWPW-1	10/6/06 15:45	524.18
SWPW-2	8/23/06 14:50	496.04	SWPW-1	10/6/06 15:50	524.47
SWPW-2	8/23/06 14:55	496.27	SWPW-1	10/6/06 15:55	524.44
SWPW-2	8/23/06 15:00	496.65	SWPW-1	10/6/06 16:00	524.27
SWPW-2	8/23/06 15:05	497.06	SWPW-1	10/6/06 16:05	524.27
SWPW-2	8/23/06 15:10	496.53	SWPW-1	10/6/06 16:10	524.41
SWPW-2	8/23/06 15:15	497.22	SWPW-1	10/6/06 16:15	524.42
SWPW-2	8/23/06 15:20	457.35	SWPW-1	10/6/06 16:20	524.43
SWPW-2	8/23/06 15:25	454.08	SWPW-1	10/6/06 16:25	524.40
SWPW-2	8/23/06 15:30	452.23	SWPW-1	10/6/06 16:30	524.54
SWPW-2	8/23/06 15:35	450.96	SWPW-1	10/6/06 16:35	524.65
SWPW-2	8/23/06 15:40	449.95	SWPW-1	10/6/06 16:40	524.88
SWPW-2	8/23/06 15:45	449.09	SWPW-1	10/6/06 16:45	524.76
SWPW-2	8/23/06 15:50	448.33	SWPW-1	10/6/06 16:50	524.61
SWPW-2	8/23/06 15:55	447.67	SWPW-1	10/6/06 16:55	524.61
SWPW-2	8/23/06 16:00	447.09	SWPW-1	10/6/06 17:00	524.87
SWPW-2	8/23/06 16:05	446.60	SWPW-1	10/6/06 17:05	524.97
SWPW-2	8/23/06 16:10	446.14	SWPW-1	10/6/06 17:10	524.93
SWPW-2	8/23/06 16:15	445.69	SWPW-1	10/6/06 17:15	524.92
SWPW-2	8/23/06 16:20	445.31	SWPW-1	10/6/06 17:20	524.78
SWPW-2	8/23/06 16:25	444.93	SWPW-1	10/6/06 17:25	524.74
SWPW-2	8/23/06 16:30	444.59	SWPW-1	10/6/06 17:30	524.85
SWPW-2	8/23/06 16:35	444.29	SWPW-1	10/6/06 17:35	525.07
SWPW-2	8/23/06 16:40	443.99	SWPW-1	10/6/06 17:40	525.08
SWPW-2	8/23/06 16:45	443.70	SWPW-1	10/6/06 17:45	525.15
SWPW-2	8/23/06 16:50	443.46	SWPW-1	10/6/06 17:50	525.07
SWPW-2	8/23/06 16:55	443.20	SWPW-1	10/6/06 17:55	525.36

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	8/23/06 17:00	442.96	SWPW-1	10/6/06 18:00	525.04
SWPW-2	8/23/06 17:05	442.76	SWPW-1	10/6/06 18:05	525.37
SWPW-2	8/23/06 17:10	442.56	SWPW-1	10/6/06 18:10	525.06
SWPW-2	8/23/06 17:15	442.34	SWPW-1	10/6/06 18:15	525.42
SWPW-2	8/23/06 17:20	442.15	SWPW-1	10/6/06 18:20	525.27
SWPW-2	8/23/06 17:25	441.99	SWPW-1	10/6/06 18:25	525.01
SWPW-2	8/23/06 17:30	441.83	SWPW-1	10/6/06 18:30	525.04
SWPW-2	8/23/06 17:35	441.69	SWPW-1	10/6/06 18:35	525.32
SWPW-2	8/23/06 17:40	441.53	SWPW-1	10/6/06 18:40	525.28
SWPW-2	8/23/06 17:45	441.37	SWPW-1	10/6/06 18:45	525.17
SWPW-2	8/23/06 17:50	441.25	SWPW-1	10/6/06 18:50	525.04
SWPW-2	8/23/06 17:55	441.12	SWPW-1	10/6/06 18:55	525.38
SWPW-2	8/23/06 18:00	440.95	SWPW-1	10/6/06 19:00	524.98
SWPW-2	8/23/06 18:05	440.87	SWPW-1	10/6/06 19:05	525.35
SWPW-2	8/23/06 18:10	440.76	SWPW-1	10/6/06 19:10	525.31
SWPW-2	8/23/06 18:15	440.62	SWPW-1	10/6/06 19:15	525.17
SWPW-2	8/23/06 18:20	440.52	SWPW-1	10/6/06 19:20	525.34
SWPW-2	8/23/06 18:25	440.40	SWPW-1	10/6/06 19:25	525.16
SWPW-2	8/23/06 18:30	440.33	SWPW-1	10/6/06 19:30	525.42
SWPW-2	8/23/06 18:35	440.22	SWPW-1	10/6/06 19:35	525.39
SWPW-2	8/23/06 18:40	440.12	SWPW-1	10/6/06 19:40	525.32
SWPW-2	8/23/06 18:45	440.02	SWPW-1	10/6/06 19:45	525.60
SWPW-2	8/23/06 18:50	439.96	SWPW-1	10/6/06 19:50	525.29
SWPW-2	8/23/06 18:55	439.88	SWPW-1	10/6/06 19:55	525.68
SWPW-2	8/23/06 19:00	439.79	SWPW-1	10/6/06 20:00	525.47
SWPW-2	8/23/06 19:05	439.72	SWPW-1	10/6/06 20:05	525.72
SWPW-2	8/23/06 19:10	439.63	SWPW-1	10/6/06 20:10	525.60
SWPW-2	8/23/06 19:15	439.56	SWPW-1	10/6/06 20:15	525.40
SWPW-2	8/23/06 19:20	439.50	SWPW-1	10/6/06 20:20	525.83
SWPW-2	8/23/06 19:25	439.44	SWPW-1	10/6/06 20:25	525.38
SWPW-2	8/23/06 19:30	439.36	SWPW-1	10/6/06 20:30	525.58
SWPW-2	8/23/06 19:35	439.30	SWPW-1	10/6/06 20:35	525.52
SWPW-2	8/23/06 19:40	439.23	SWPW-1	10/6/06 20:40	525.52
SWPW-2	8/23/06 19:45	439.15	SWPW-1	10/6/06 20:45	525.76
SWPW-2	8/23/06 19:50	439.10	SWPW-1	10/6/06 20:50	525.62
SWPW-2	8/23/06 19:55	439.03	SWPW-1	10/6/06 20:55	526.03
SWPW-2	8/23/06 20:00	439.00	SWPW-1	10/6/06 21:00	525.87
SWPW-2	8/23/06 20:05	438.94	SWPW-1	10/6/06 21:05	526.02
SWPW-2	8/23/06 20:10	438.87	SWPW-1	10/6/06 21:10	526.06
SWPW-2	8/23/06 20:15	438.84	SWPW-1	10/6/06 21:15	526.15
SWPW-2	8/23/06 20:20	438.80	SWPW-1	10/6/06 21:20	526.17
SWPW-2	8/23/06 20:25	438.71	SWPW-1	10/6/06 21:25	526.52
SWPW-2	8/23/06 20:30	438.69	SWPW-1	10/6/06 21:30	526.16
SWPW-2	8/23/06 20:35	438.64	SWPW-1	10/6/06 21:35	526.48
SWPW-2	8/23/06 20:40	438.60	SWPW-1	10/6/06 21:40	526.33
SWPW-2	8/23/06 20:45	438.58	SWPW-1	10/6/06 21:45	526.34
SWPW-2	8/23/06 20:50	438.50	SWPW-1	10/6/06 21:50	526.45
SWPW-2	8/23/06 20:55	438.47	SWPW-1	10/6/06 21:55	526.51
SWPW-2	8/23/06 21:00	438.47	SWPW-1	10/6/06 22:00	526.39
SWPW-2	8/23/06 21:05	438.37	SWPW-1	10/6/06 22:05	526.60
SWPW-2	8/23/06 21:10	438.35	SWPW-1	10/6/06 22:10	526.56
SWPW-2	8/23/06 21:15	438.34	SWPW-1	10/6/06 22:15	526.61
SWPW-2	8/23/06 21:20	438.27	SWPW-1	10/6/06 22:20	526.61
SWPW-2	8/23/06 21:25	438.22	SWPW-1	10/6/06 22:25	526.31
SWPW-2	8/23/06 21:30	438.21	SWPW-1	10/6/06 22:30	526.44
SWPW-2	8/23/06 21:35	438.15	SWPW-1	10/6/06 22:35	526.36
SWPW-2	8/23/06 21:40	438.13	SWPW-1	10/6/06 22:40	526.57
SWPW-2	8/23/06 21:45	438.08	SWPW-1	10/6/06 22:45	526.53
SWPW-2	8/23/06 21:50	438.08	SWPW-1	10/6/06 22:50	526.44
SWPW-2	8/23/06 21:55	438.02	SWPW-1	10/6/06 22:55	526.55
SWPW-2	8/23/06 22:00	437.99	SWPW-1	10/6/06 23:00	526.69
SWPW-2	8/23/06 22:05	437.96	SWPW-1	10/6/06 23:05	526.59
SWPW-2	8/23/06 22:10	437.93	SWPW-1	10/6/06 23:10	526.30
SWPW-2	8/23/06 22:15	437.89	SWPW-1	10/6/06 23:15	526.43
SWPW-2	8/23/06 22:20	437.87	SWPW-1	10/6/06 23:20	526.45
SWPW-2	8/23/06 22:25	437.87	SWPW-1	10/6/06 23:25	526.79
SWPW-2	8/23/06 22:30	437.84	SWPW-1	10/6/06 23:30	526.54
SWPW-2	8/23/06 22:35	437.80	SWPW-1	10/6/06 23:35	526.54
SWPW-2	8/23/06 22:40	437.75	SWPW-1	10/6/06 23:40	526.47
SWPW-2	8/23/06 22:45	437.72	SWPW-1	10/6/06 23:45	526.61
SWPW-2	8/23/06 22:50	437.69	SWPW-1	10/6/06 23:50	526.51
SWPW-2	8/23/06 22:55	437.68	SWPW-1	10/6/06 23:55	526.60
SWPW-2	8/23/06 23:00	437.65	SWPW-1	10/7/06 0:00	526.54
SWPW-2	8/23/06 23:05	437.62	SWPW-1	10/7/06 0:05	526.62
SWPW-2	8/23/06 23:10	437.62	SWPW-1	10/7/06 0:10	526.61
SWPW-2	8/23/06 23:15	437.57	SWPW-1	10/7/06 0:15	526.64
SWPW-2	8/23/06 23:20	437.53	SWPW-1	10/7/06 0:20	526.42
SWPW-2	8/23/06 23:25	437.51	SWPW-1	10/7/06 0:25	526.45
SWPW-2	8/23/06 23:30	437.51	SWPW-1	10/7/06 0:30	526.69
SWPW-2	8/23/06 23:35	437.48	SWPW-1	10/7/06 0:35	526.49
SWPW-2	8/23/06 23:40	437.49	SWPW-1	10/7/06 0:40	526.48
SWPW-2	8/23/06 23:45	437.44	SWPW-1	10/7/06 0:45	526.51
SWPW-2	8/23/06 23:50	437.40	SWPW-1	10/7/06 0:50	526.33
SWPW-2	8/23/06 23:55	437.37	SWPW-1	10/7/06 0:55	526.76
SWPW-2	8/24/06 0:00	437.37	SWPW-1	10/7/06 1:00	526.68
SWPW-2	8/24/06 0:05	437.37	SWPW-1	10/7/06 1:05	526.80
SWPW-2	8/24/06 0:10	437.32	SWPW-1	10/7/06 1:10	526.50
SWPW-2	8/24/06 0:15	437.31	SWPW-1	10/7/06 1:15	526.62
SWPW-2	8/24/06 0:20	437.25	SWPW-1	10/7/06 1:20	526.49
SWPW-2	8/24/06 0:25	437.23	SWPW-1	10/7/06 1:25	526.41
SWPW-2	8/24/06 0:30	437.25	SWPW-1	10/7/06 1:30	526.60
SWPW-2	8/24/06 0:35	437.22	SWPW-1	10/7/06 1:35	526.76
SWPW-2	8/24/06 0:40	437.20	SWPW-1	10/7/06 1:40	526.77
SWPW-2	8/24/06 0:45	437.18	SWPW-1	10/7/06 1:45	526.73
SWPW-2	8/24/06 0:50	437.16	SWPW-1	10/7/06 1:50	526.58
SWPW-2	8/24/06 0:55	437.14	SWPW-1	10/7/06 1:55	526.60
SWPW-2	8/24/06 1:00	437.12	SWPW-1	10/7/06 2:00	526.78
SWPW-2	8/24/06 1:05	437.12	SWPW-1	10/7/06 2:05	526.51
SWPW-2	8/24/06 1:10	437.08	SWPW-1	10/7/06 2:10	526.82
SWPW-2	8/24/06 1:15	437.04	SWPW-1	10/7/06 2:15	526.55

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	8/24/06 1:20	437.01	SWPW-1	10/7/06 2:20	526.87
SWPW-2	8/24/06 1:25	437.00	SWPW-1	10/7/06 2:25	526.56
SWPW-2	8/24/06 1:30	437.00	SWPW-1	10/7/06 2:30	526.79
SWPW-2	8/24/06 1:35	437.00	SWPW-1	10/7/06 2:35	526.61
SWPW-2	8/24/06 1:40	436.97	SWPW-1	10/7/06 2:40	526.84
SWPW-2	8/24/06 1:45	436.97	SWPW-1	10/7/06 2:45	526.85
SWPW-2	8/24/06 1:50	436.95	SWPW-1	10/7/06 2:50	526.78
SWPW-2	8/24/06 1:55	436.93	SWPW-1	10/7/06 2:55	526.79
SWPW-2	8/24/06 2:00	436.91	SWPW-1	10/7/06 3:00	526.72
SWPW-2	8/24/06 2:05	436.89	SWPW-1	10/7/06 3:05	527.00
SWPW-2	8/24/06 2:10	436.88	SWPW-1	10/7/06 3:10	526.70
SWPW-2	8/24/06 2:15	436.88	SWPW-1	10/7/06 3:15	526.76
SWPW-2	8/24/06 2:20	436.87	SWPW-1	10/7/06 3:20	526.92
SWPW-2	8/24/06 2:25	436.86	SWPW-1	10/7/06 3:25	526.85
SWPW-2	8/24/06 2:30	436.83	SWPW-1	10/7/06 3:30	526.98
SWPW-2	8/24/06 2:35	436.85	SWPW-1	10/7/06 3:35	527.05
SWPW-2	8/24/06 2:40	436.78	SWPW-1	10/7/06 3:40	527.03
SWPW-2	8/24/06 2:45	436.80	SWPW-1	10/7/06 3:45	526.99
SWPW-2	8/24/06 2:50	436.76	SWPW-1	10/7/06 3:50	527.24
SWPW-2	8/24/06 2:55	436.76	SWPW-1	10/7/06 3:55	527.38
SWPW-2	8/24/06 3:00	436.73	SWPW-1	10/7/06 4:00	527.07
SWPW-2	8/24/06 3:05	436.71	SWPW-1	10/7/06 4:05	527.27
SWPW-2	8/24/06 3:10	436.70	SWPW-1	10/7/06 4:10	527.13
SWPW-2	8/24/06 3:15	436.69	SWPW-1	10/7/06 4:15	527.04
SWPW-2	8/24/06 3:20	436.70	SWPW-1	10/7/06 4:20	527.33
SWPW-2	8/24/06 3:25	436.67	SWPW-1	10/7/06 4:25	527.12
SWPW-2	8/24/06 3:30	436.65	SWPW-1	10/7/06 4:30	527.17
SWPW-2	8/24/06 3:35	436.63	SWPW-1	10/7/06 4:35	527.26
SWPW-2	8/24/06 3:40	436.64	SWPW-1	10/7/06 4:40	527.26
SWPW-2	8/24/06 3:45	436.63	SWPW-1	10/7/06 4:45	527.24
SWPW-2	8/24/06 3:50	436.60	SWPW-1	10/7/06 4:50	526.98
SWPW-2	8/24/06 3:55	436.58	SWPW-1	10/7/06 4:55	527.10
SWPW-2	8/24/06 4:00	436.57	SWPW-1	10/7/06 5:00	527.31
SWPW-2	8/24/06 4:05	436.57	SWPW-1	10/7/06 5:05	527.39
SWPW-2	8/24/06 4:10	436.53	SWPW-1	10/7/06 5:10	527.19
SWPW-2	8/24/06 4:15	436.56	SWPW-1	10/7/06 5:15	527.66
SWPW-2	8/24/06 4:20	436.48	SWPW-1	10/7/06 5:20	527.24
SWPW-2	8/24/06 4:25	436.48	SWPW-1	10/7/06 5:25	527.07
SWPW-2	8/24/06 4:30	436.47	SWPW-1	10/7/06 5:30	527.22
SWPW-2	8/24/06 4:35	436.46	SWPW-1	10/7/06 5:35	527.44
SWPW-2	8/24/06 4:40	436.44	SWPW-1	10/7/06 5:40	527.35
SWPW-2	8/24/06 4:45	436.44	SWPW-1	10/7/06 5:45	527.57
SWPW-2	8/24/06 4:50	436.41	SWPW-1	10/7/06 5:50	527.33
SWPW-2	8/24/06 4:55	436.41	SWPW-1	10/7/06 5:55	527.68
SWPW-2	8/24/06 5:00	436.43	SWPW-1	10/7/06 6:00	527.30
SWPW-2	8/24/06 5:05	436.38	SWPW-1	10/7/06 6:05	527.42
SWPW-2	8/24/06 5:10	436.36	SWPW-1	10/7/06 6:10	527.58
SWPW-2	8/24/06 5:15	436.39	SWPW-1	10/7/06 6:15	527.17
SWPW-2	8/24/06 5:20	436.37	SWPW-1	10/7/06 6:20	527.43
SWPW-2	8/24/06 5:25	436.31	SWPW-1	10/7/06 6:25	527.39
SWPW-2	8/24/06 5:30	436.35	SWPW-1	10/7/06 6:30	527.40
SWPW-2	8/24/06 5:35	436.29	SWPW-1	10/7/06 6:35	527.50
SWPW-2	8/24/06 5:40	436.30	SWPW-1	10/7/06 6:40	527.49
SWPW-2	8/24/06 5:45	436.32	SWPW-1	10/7/06 6:45	527.51
SWPW-2	8/24/06 5:50	436.25	SWPW-1	10/7/06 6:50	527.39
SWPW-2	8/24/06 5:55	436.26	SWPW-1	10/7/06 6:55	527.30
SWPW-2	8/24/06 6:00	436.24	SWPW-1	10/7/06 7:00	527.75
SWPW-2	8/24/06 6:05	436.23	SWPW-1	10/7/06 7:05	527.49
SWPW-2	8/24/06 6:10	436.28	SWPW-1	10/7/06 7:10	527.46
SWPW-2	8/24/06 6:15	436.26	SWPW-1	10/7/06 7:15	527.33
SWPW-2	8/24/06 6:20	436.25	SWPW-1	10/7/06 7:20	527.35
SWPW-2	8/24/06 6:25	436.22	SWPW-1	10/7/06 7:25	527.48
SWPW-2	8/24/06 6:30	436.23	SWPW-1	10/7/06 7:30	527.49
SWPW-2	8/24/06 6:35	436.20	SWPW-1	10/7/06 7:35	527.39
SWPW-2	8/24/06 6:40	436.19	SWPW-1	10/7/06 7:40	527.23
SWPW-2	8/24/06 6:45	436.18	SWPW-1	10/7/06 7:45	527.27
SWPW-2	8/24/06 6:50	436.17	SWPW-1	10/7/06 7:50	527.35
SWPW-2	8/24/06 6:55	436.17	SWPW-1	10/7/06 7:55	527.46
SWPW-2	8/24/06 7:00	436.14	SWPW-1	10/7/06 8:00	527.55
SWPW-2	8/24/06 7:05	436.15	SWPW-1	10/7/06 8:05	527.56
SWPW-2	8/24/06 7:10	436.11	SWPW-1	10/7/06 8:10	527.46
SWPW-2	8/24/06 7:15	436.15	SWPW-1	10/7/06 8:15	527.31
SWPW-2	8/24/06 7:20	436.12	SWPW-1	10/7/06 8:20	527.22
SWPW-2	8/24/06 7:25	436.12	SWPW-1	10/7/06 8:25	527.61
SWPW-2	8/24/06 7:30	436.10	SWPW-1	10/7/06 8:30	527.31
SWPW-2	8/24/06 7:35	436.10	SWPW-1	10/7/06 8:35	527.43
SWPW-2	8/24/06 7:40	436.09	SWPW-1	10/7/06 8:40	527.47
SWPW-2	8/24/06 7:45	436.10	SWPW-1	10/7/06 8:45	527.40
SWPW-2	8/24/06 7:50	436.08	SWPW-1	10/7/06 8:50	527.47
SWPW-2	8/24/06 7:55	436.06	SWPW-1	10/7/06 8:55	527.50
SWPW-2	8/24/06 8:00	436.06	SWPW-1	10/7/06 9:00	527.65
SWPW-2	8/24/06 8:05	436.04	SWPW-1	10/7/06 9:05	527.46
SWPW-2	8/24/06 8:10	436.05	SWPW-1	10/7/06 9:10	527.36
SWPW-2	8/24/06 8:15	436.04	SWPW-1	10/7/06 9:15	527.30
SWPW-2	8/24/06 8:20	436.02	SWPW-1	10/7/06 9:20	527.54
SWPW-2	8/24/06 8:25	436.03	SWPW-1	10/7/06 9:25	527.24
SWPW-2	8/24/06 8:30	436.01	SWPW-1	10/7/06 9:30	527.73
SWPW-2	8/24/06 8:35	436.02	SWPW-1	10/7/06 9:35	527.65
SWPW-2	8/24/06 8:40	436.01	SWPW-1	10/7/06 9:40	527.48
SWPW-2	8/24/06 8:45	435.99	SWPW-1	10/7/06 9:45	527.64
SWPW-2	8/24/06 8:50	435.99	SWPW-1	10/7/06 9:50	527.62
SWPW-2	8/24/06 8:55	436.00	SWPW-1	10/7/06 9:55	527.42
SWPW-2	8/24/06 9:00	435.99	SWPW-1	10/7/06 10:00	527.89
SWPW-2	8/24/06 9:05	435.98	SWPW-1	10/7/06 10:05	527.33
SWPW-2	8/24/06 9:10	435.97	SWPW-1	10/7/06 10:10	527.81
SWPW-2	8/24/06 9:15	435.97	SWPW-1	10/7/06 10:15	527.47
SWPW-2	8/24/06 9:20	435.96	SWPW-1	10/7/06 10:20	527.53
SWPW-2	8/24/06 9:25	435.95	SWPW-1	10/7/06 10:25	527.69
SWPW-2	8/24/06 9:30	435.95	SWPW-1	10/7/06 10:30	527.76
SWPW-2	8/24/06 9:35	435.94	SWPW-1	10/7/06 10:35	527.53

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	8/24/06 9:40	435.93	SWPW-1	10/7/06 10:40	527.58
SWPW-2	8/24/06 9:45	435.92	SWPW-1	10/7/06 10:45	527.70
SWPW-2	8/24/06 9:50	435.92	SWPW-1	10/7/06 10:50	527.71
SWPW-2	8/24/06 9:55	435.93	SWPW-1	10/7/06 10:55	527.69
SWPW-2	8/24/06 10:00	435.91	SWPW-1	10/7/06 11:00	527.70
SWPW-2	8/24/06 10:05	435.90	SWPW-1	10/7/06 11:05	527.55
SWPW-2	8/24/06 10:10	435.91	SWPW-1	10/7/06 11:10	527.91
SWPW-2	8/24/06 10:15	435.90	SWPW-1	10/7/06 11:15	527.78
SWPW-2	8/24/06 10:20	435.89	SWPW-1	10/7/06 11:20	527.84
SWPW-2	8/24/06 10:25	435.89	SWPW-1	10/7/06 11:25	527.83
SWPW-2	8/24/06 10:30	435.88	SWPW-1	10/7/06 11:30	527.82
SWPW-2	8/24/06 10:35	435.88	SWPW-1	10/7/06 11:35	527.90
SWPW-2	8/24/06 10:40	435.87	SWPW-1	10/7/06 11:40	527.59
SWPW-2	8/24/06 10:45	435.87	SWPW-1	10/7/06 11:45	527.91
SWPW-2	8/24/06 10:50	435.88	SWPW-1	10/7/06 11:50	527.57
SWPW-2	8/24/06 10:55	435.86	SWPW-1	10/7/06 11:55	527.67
SWPW-2	8/24/06 11:00	435.85	SWPW-1	10/7/06 12:00	527.97
SWPW-2	8/24/06 11:05	435.86	SWPW-1	10/7/06 12:05	527.93
SWPW-2	8/24/06 11:10	435.83	SWPW-1	10/7/06 12:10	527.70
SWPW-2	8/24/06 11:15	435.83	SWPW-1	10/7/06 12:15	527.97
SWPW-2	8/24/06 11:20	435.83	SWPW-1	10/7/06 12:20	527.92
SWPW-2	8/24/06 11:25	435.82	SWPW-1	10/7/06 12:25	528.11
SWPW-2	8/24/06 11:30	435.82	SWPW-1	10/7/06 12:30	527.89
SWPW-2	8/24/06 11:35	435.82	SWPW-1	10/7/06 12:35	528.24
SWPW-2	8/24/06 11:40	435.79	SWPW-1	10/7/06 12:40	527.92
SWPW-2	8/24/06 11:45	435.83	SWPW-1	10/7/06 12:45	528.33
SWPW-2	8/24/06 11:50	435.81	SWPW-1	10/7/06 12:50	528.12
SWPW-2	8/24/06 11:55	435.78	SWPW-1	10/7/06 12:55	527.68
SWPW-2	8/24/06 12:00	435.77	SWPW-1	10/7/06 13:00	527.77
SWPW-2	8/24/06 12:05	435.81	SWPW-1	10/7/06 13:05	527.96
SWPW-2	8/24/06 12:10	435.80	SWPW-1	10/7/06 13:10	528.18
SWPW-2	8/24/06 12:15	435.74	SWPW-1	10/7/06 13:15	528.05
SWPW-2	8/24/06 12:20	435.78	SWPW-1	10/7/06 13:20	527.84
SWPW-2	8/24/06 12:25	435.74	SWPW-1	10/7/06 13:25	527.91
SWPW-2	8/24/06 12:30	435.77	SWPW-1	10/7/06 13:30	528.00
SWPW-2	8/24/06 12:35	435.78	SWPW-1	10/7/06 13:35	528.09
SWPW-2	8/24/06 12:40	435.76	SWPW-1	10/7/06 13:40	527.93
SWPW-2	8/24/06 12:45	435.72	SWPW-1	10/7/06 13:45	528.08
SWPW-2	8/24/06 12:50	435.72	SWPW-1	10/7/06 13:50	527.78
SWPW-2	8/24/06 12:55	435.74	SWPW-1	10/7/06 13:55	527.94
SWPW-2	8/24/06 13:00	435.69	SWPW-1	10/7/06 14:00	527.67
SWPW-2	8/24/06 13:05	435.73	SWPW-1	10/7/06 14:05	528.24
SWPW-2	8/24/06 13:10	435.68	SWPW-1	10/7/06 14:10	527.87
SWPW-2	8/24/06 13:15	435.72	SWPW-1	10/7/06 14:15	528.20
SWPW-2	8/24/06 13:20	435.70	SWPW-1	10/7/06 14:20	528.16
SWPW-2	8/24/06 13:25	435.69	SWPW-1	10/7/06 14:25	527.87
SWPW-2	8/24/06 13:30	435.71	SWPW-1	10/7/06 14:30	528.10
SWPW-2	8/24/06 13:35	435.66	SWPW-1	10/7/06 14:35	528.01
SWPW-2	8/24/06 13:40	435.65	SWPW-1	10/7/06 14:40	527.82
SWPW-2	8/24/06 13:45	435.65	SWPW-1	10/7/06 14:45	528.21
SWPW-2	8/24/06 13:50	435.67	SWPW-1	10/7/06 14:50	528.20
SWPW-2	8/24/06 13:55	435.64	SWPW-1	10/7/06 14:55	528.36
SWPW-2	8/24/06 14:00	435.66	SWPW-1	10/7/06 15:00	527.98
SWPW-2	8/24/06 14:05	435.63	SWPW-1	10/7/06 15:05	528.28
SWPW-2	8/24/06 14:10	435.65	SWPW-1	10/7/06 15:10	528.07
SWPW-2	8/24/06 14:15	435.64	SWPW-1	10/7/06 15:15	528.23
SWPW-2	8/24/06 14:20	435.63	SWPW-1	10/7/06 15:20	528.15
SWPW-2	8/24/06 14:25	435.62	SWPW-1	10/7/06 15:25	528.20
SWPW-2	8/24/06 14:30	435.63	SWPW-1	10/7/06 15:30	528.38
SWPW-2	8/24/06 14:35	435.62	SWPW-1	10/7/06 15:35	528.09
SWPW-2	8/24/06 14:40	435.61	SWPW-1	10/7/06 15:40	528.02
SWPW-2	8/24/06 14:45	435.59	SWPW-1	10/7/06 15:45	528.03
SWPW-2	8/24/06 14:50	435.60	SWPW-1	10/7/06 15:50	528.16
SWPW-2	8/24/06 14:55	435.59	SWPW-1	10/7/06 15:55	528.18
SWPW-2	8/24/06 15:00	435.59	SWPW-1	10/7/06 16:00	528.22
SWPW-2	8/24/06 15:05	435.58	SWPW-1	10/7/06 16:05	528.17
SWPW-2	8/24/06 15:10	435.56	SWPW-1	10/7/06 16:10	528.31
SWPW-2	8/24/06 15:15	435.56	SWPW-1	10/7/06 16:15	528.17
SWPW-2	8/24/06 15:20	435.52	SWPW-1	10/7/06 16:20	528.22
SWPW-2	8/24/06 15:25	435.54	SWPW-1	10/7/06 16:25	528.24
SWPW-2	8/24/06 15:30	435.52	SWPW-1	10/7/06 16:30	528.21
SWPW-2	8/24/06 15:35	435.53	SWPW-1	10/7/06 16:35	528.16
SWPW-2	8/24/06 15:40	435.53	SWPW-1	10/7/06 16:40	528.31
SWPW-2	8/24/06 15:45	435.52	SWPW-1	10/7/06 16:45	527.98
SWPW-2	8/24/06 15:50	435.52	SWPW-1	10/7/06 16:50	528.00
SWPW-2	8/24/06 15:55	435.50	SWPW-1	10/7/06 16:55	528.16
SWPW-2	8/24/06 16:00	435.50	SWPW-1	10/7/06 17:00	528.11
SWPW-2	8/24/06 16:05	435.50	SWPW-1	10/7/06 17:05	528.02
SWPW-2	8/24/06 16:10	435.49	SWPW-1	10/7/06 17:10	528.20
SWPW-2	8/24/06 16:15	435.48	SWPW-1	10/7/06 17:15	528.11
SWPW-2	8/24/06 16:20	435.47	SWPW-1	10/7/06 17:20	528.38
SWPW-2	8/24/06 16:25	435.46	SWPW-1	10/7/06 17:25	528.10
SWPW-2	8/24/06 16:30	435.45	SWPW-1	10/7/06 17:30	528.13
SWPW-2	8/24/06 16:35	435.44	SWPW-1	10/7/06 17:35	528.36
SWPW-2	8/24/06 16:40	435.45	SWPW-1	10/7/06 17:40	528.17
SWPW-2	8/24/06 16:45	435.44	SWPW-1	10/7/06 17:45	528.27
SWPW-2	8/24/06 16:50	435.44	SWPW-1	10/7/06 17:50	528.44
SWPW-2	8/24/06 16:55	435.47	SWPW-1	10/7/06 17:55	528.01
SWPW-2	8/24/06 17:00	435.46	SWPW-1	10/7/06 18:00	528.47
SWPW-2	8/24/06 17:05	435.43	SWPW-1	10/7/06 18:05	528.42
SWPW-2	8/24/06 17:10	435.42	SWPW-1	10/7/06 18:10	528.57
SWPW-2	8/24/06 17:15	435.41	SWPW-1	10/7/06 18:15	528.25
SWPW-2	8/24/06 17:20	435.40	SWPW-1	10/7/06 18:20	528.47
SWPW-2	8/24/06 17:25	435.39	SWPW-1	10/7/06 18:25	528.50
SWPW-2	8/24/06 17:30	435.39	SWPW-1	10/7/06 18:30	528.57
SWPW-2	8/24/06 17:35	435.39	SWPW-1	10/7/06 18:35	528.78
SWPW-2	8/24/06 17:40	435.38	SWPW-1	10/7/06 18:40	528.38
SWPW-2	8/24/06 17:45	435.38	SWPW-1	10/7/06 18:45	528.35
SWPW-2	8/24/06 17:50	435.38	SWPW-1	10/7/06 18:50	528.64
SWPW-2	8/24/06 17:55	435.36	SWPW-1	10/7/06 18:55	528.25

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	8/24/06 18:00	435.36	SWPW-1	10/7/06 19:00	528.63
SWPW-2	8/24/06 18:05	435.36	SWPW-1	10/7/06 19:05	528.37
SWPW-2	8/24/06 18:10	435.35	SWPW-1	10/7/06 19:10	528.51
SWPW-2	8/24/06 18:15	435.34	SWPW-1	10/7/06 19:15	528.50
SWPW-2	8/24/06 18:20	435.35	SWPW-1	10/7/06 19:20	528.49
SWPW-2	8/24/06 18:25	435.33	SWPW-1	10/7/06 19:25	528.56
SWPW-2	8/24/06 18:30	435.34	SWPW-1	10/7/06 19:30	528.71
SWPW-2	8/24/06 18:35	435.33	SWPW-1	10/7/06 19:35	528.53
SWPW-2	8/24/06 18:40	435.33	SWPW-1	10/7/06 19:40	528.64
SWPW-2	8/24/06 18:45	435.32	SWPW-1	10/7/06 19:45	528.77
SWPW-2	8/24/06 18:50	435.32	SWPW-1	10/7/06 19:50	528.67
SWPW-2	8/24/06 18:55	435.32	SWPW-1	10/7/06 19:55	528.69
SWPW-2	8/24/06 19:00	435.30	SWPW-1	10/7/06 20:00	528.80
SWPW-2	8/24/06 19:05	435.31	SWPW-1	10/7/06 20:05	528.77
SWPW-2	8/24/06 19:10	435.30	SWPW-1	10/7/06 20:10	528.63
SWPW-2	8/24/06 19:15	435.31	SWPW-1	10/7/06 20:15	528.88
SWPW-2	8/24/06 19:20	435.31	SWPW-1	10/7/06 20:20	528.68
SWPW-2	8/24/06 19:25	435.29	SWPW-1	10/7/06 20:25	528.66
SWPW-2	8/24/06 19:30	435.30	SWPW-1	10/7/06 20:30	528.63
SWPW-2	8/24/06 19:35	435.28	SWPW-1	10/7/06 20:35	528.69
SWPW-2	8/24/06 19:40	435.29	SWPW-1	10/7/06 20:40	528.56
SWPW-2	8/24/06 19:45	435.28	SWPW-1	10/7/06 20:45	528.79
SWPW-2	8/24/06 19:50	435.29	SWPW-1	10/7/06 20:50	528.71
SWPW-2	8/24/06 19:55	435.27	SWPW-1	10/7/06 20:55	528.80
SWPW-2	8/24/06 20:00	435.26	SWPW-1	10/7/06 21:00	528.88
SWPW-2	8/24/06 20:05	435.26	SWPW-1	10/7/06 21:05	529.00
SWPW-2	8/24/06 20:10	435.28	SWPW-1	10/7/06 21:10	528.90
SWPW-2	8/24/06 20:15	435.26	SWPW-1	10/7/06 21:15	528.94
SWPW-2	8/24/06 20:20	435.24	SWPW-1	10/7/06 21:20	529.05
SWPW-2	8/24/06 20:25	435.29	SWPW-1	10/7/06 21:25	528.81
SWPW-2	8/24/06 20:30	435.26	SWPW-1	10/7/06 21:30	528.79
SWPW-2	8/24/06 20:35	435.26	SWPW-1	10/7/06 21:35	528.75
SWPW-2	8/24/06 20:40	435.26	SWPW-1	10/7/06 21:40	528.63
SWPW-2	8/24/06 20:45	435.22	SWPW-1	10/7/06 21:45	529.00
SWPW-2	8/24/06 20:50	435.27	SWPW-1	10/7/06 21:50	528.83
SWPW-2	8/24/06 20:55	435.25	SWPW-1	10/7/06 21:55	528.83
SWPW-2	8/24/06 21:00	435.26	SWPW-1	10/7/06 22:00	528.80
SWPW-2	8/24/06 21:05	435.21	SWPW-1	10/7/06 22:05	528.85
SWPW-2	8/24/06 21:10	435.21	SWPW-1	10/7/06 22:10	528.99
SWPW-2	8/24/06 21:15	435.26	SWPW-1	10/7/06 22:15	529.20
SWPW-2	8/24/06 21:20	435.24	SWPW-1	10/7/06 22:20	528.82
SWPW-2	8/24/06 21:25	435.23	SWPW-1	10/7/06 22:25	528.79
SWPW-2	8/24/06 21:30	435.26	SWPW-1	10/7/06 22:30	529.24
SWPW-2	8/24/06 21:35	435.22	SWPW-1	10/7/06 22:35	528.85
SWPW-2	8/24/06 21:40	435.26	SWPW-1	10/7/06 22:40	529.22
SWPW-2	8/24/06 21:45	435.24	SWPW-1	10/7/06 22:45	528.95
SWPW-2	8/24/06 21:50	435.20	SWPW-1	10/7/06 22:50	528.90
SWPW-2	8/24/06 21:55	435.24	SWPW-1	10/7/06 22:55	529.06
SWPW-2	8/24/06 22:00	435.20	SWPW-1	10/7/06 23:00	529.01
SWPW-2	8/24/06 22:05	435.21	SWPW-1	10/7/06 23:05	529.22
SWPW-2	8/24/06 22:10	435.19	SWPW-1	10/7/06 23:10	528.98
SWPW-2	8/24/06 22:15	435.19	SWPW-1	10/7/06 23:15	528.94
SWPW-2	8/24/06 22:20	435.19	SWPW-1	10/7/06 23:20	529.30
SWPW-2	8/24/06 22:25	435.22	SWPW-1	10/7/06 23:25	528.95
SWPW-2	8/24/06 22:30	435.22	SWPW-1	10/7/06 23:30	529.02
SWPW-2	8/24/06 22:35	435.21	SWPW-1	10/7/06 23:35	528.91
SWPW-2	8/24/06 22:40	435.20	SWPW-1	10/7/06 23:40	529.20
SWPW-2	8/24/06 22:45	435.19	SWPW-1	10/7/06 23:45	529.04
SWPW-2	8/24/06 22:50	435.19	SWPW-1	10/7/06 23:50	529.03
SWPW-2	8/24/06 22:55	435.17	SWPW-1	10/7/06 23:55	529.29
SWPW-2	8/24/06 23:00	435.17	SWPW-1	10/8/06 0:00	528.95
SWPW-2	8/24/06 23:05	435.19	SWPW-1	10/8/06 0:05	529.10
SWPW-2	8/24/06 23:10	435.15	SWPW-1	10/8/06 0:10	529.09
SWPW-2	8/24/06 23:15	435.16	SWPW-1	10/8/06 0:15	529.20
SWPW-2	8/24/06 23:20	435.15	SWPW-1	10/8/06 0:20	529.37
SWPW-2	8/24/06 23:25	435.18	SWPW-1	10/8/06 0:25	529.27
SWPW-2	8/24/06 23:30	435.19	SWPW-1	10/8/06 0:30	529.12
SWPW-2	8/24/06 23:35	435.18	SWPW-1	10/8/06 0:35	529.54
SWPW-2	8/24/06 23:40	435.17	SWPW-1	10/8/06 0:40	529.09
SWPW-2	8/24/06 23:45	435.18	SWPW-1	10/8/06 0:45	529.09
SWPW-2	8/24/06 23:50	435.17	SWPW-1	10/8/06 0:50	529.12
SWPW-2	8/24/06 23:55	435.18	SWPW-1	10/8/06 0:55	529.15
SWPW-2	8/25/06 0:00	435.18	SWPW-1	10/8/06 1:00	529.04
SWPW-2	8/25/06 0:05	435.16	SWPW-1	10/8/06 1:05	529.34
SWPW-2	8/25/06 0:10	435.17	SWPW-1	10/8/06 1:10	529.21
SWPW-2	8/25/06 0:15	435.16	SWPW-1	10/8/06 1:15	529.14
SWPW-2	8/25/06 0:20	435.17	SWPW-1	10/8/06 1:20	529.40
SWPW-2	8/25/06 0:25	435.16	SWPW-1	10/8/06 1:25	529.11
SWPW-2	8/25/06 0:30	435.17	SWPW-1	10/8/06 1:30	529.25
SWPW-2	8/25/06 0:35	435.17	SWPW-1	10/8/06 1:35	529.22
SWPW-2	8/25/06 0:40	435.15	SWPW-1	10/8/06 1:40	529.25
SWPW-2	8/25/06 0:45	435.14	SWPW-1	10/8/06 1:45	529.02
SWPW-2	8/25/06 0:50	435.16	SWPW-1	10/8/06 1:50	529.24
SWPW-2	8/25/06 0:55	435.14	SWPW-1	10/8/06 1:55	529.31
SWPW-2	8/25/06 1:00	435.14	SWPW-1	10/8/06 2:00	529.00
SWPW-2	8/25/06 1:05	435.11	SWPW-1	10/8/06 2:05	529.21
SWPW-2	8/25/06 1:10	435.15	SWPW-1	10/8/06 2:10	529.43
SWPW-2	8/25/06 1:15	435.13	SWPW-1	10/8/06 2:15	529.22
SWPW-2	8/25/06 1:20	435.10	SWPW-1	10/8/06 2:20	529.25
SWPW-2	8/25/06 1:25	435.10	SWPW-1	10/8/06 2:25	528.89
SWPW-2	8/25/06 1:30	435.10	SWPW-1	10/8/06 2:30	529.50
SWPW-2	8/25/06 1:35	435.13	SWPW-1	10/8/06 2:35	529.15
SWPW-2	8/25/06 1:40	435.09	SWPW-1	10/8/06 2:40	529.47
SWPW-2	8/25/06 1:45	435.13	SWPW-1	10/8/06 2:45	529.21
SWPW-2	8/25/06 1:50	435.09	SWPW-1	10/8/06 2:50	529.13
SWPW-2	8/25/06 1:55	435.09	SWPW-1	10/8/06 2:55	529.19
SWPW-2	8/25/06 2:00	435.09	SWPW-1	10/8/06 3:00	529.36
SWPW-2	8/25/06 2:05	435.11	SWPW-1	10/8/06 3:05	529.28
SWPW-2	8/25/06 2:10	435.10	SWPW-1	10/8/06 3:10	529.54
SWPW-2	8/25/06 2:15	435.09	SWPW-1	10/8/06 3:15	529.05

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	8/25/06 2:20	435.10	SWPW-1	10/8/06 3:20	529.11
SWPW-2	8/25/06 2:25	435.08	SWPW-1	10/8/06 3:25	529.45
SWPW-2	8/25/06 2:30	435.09	SWPW-1	10/8/06 3:30	529.11
SWPW-2	8/25/06 2:35	435.08	SWPW-1	10/8/06 3:35	529.46
SWPW-2	8/25/06 2:40	435.08	SWPW-1	10/8/06 3:40	529.51
SWPW-2	8/25/06 2:45	435.08	SWPW-1	10/8/06 3:45	529.27
SWPW-2	8/25/06 2:50	435.07	SWPW-1	10/8/06 3:50	529.42
SWPW-2	8/25/06 2:55	435.08	SWPW-1	10/8/06 3:55	529.31
SWPW-2	8/25/06 3:00	435.06	SWPW-1	10/8/06 4:00	529.47
SWPW-2	8/25/06 3:05	435.05	SWPW-1	10/8/06 4:05	529.43
SWPW-2	8/25/06 3:10	435.05	SWPW-1	10/8/06 4:10	529.36
SWPW-2	8/25/06 3:15	435.04	SWPW-1	10/8/06 4:15	529.30
SWPW-2	8/25/06 3:20	435.04	SWPW-1	10/8/06 4:20	529.34
SWPW-2	8/25/06 3:25	435.04	SWPW-1	10/8/06 4:25	529.16
SWPW-2	8/25/06 3:30	435.03	SWPW-1	10/8/06 4:30	529.21
SWPW-2	8/25/06 3:35	435.03	SWPW-1	10/8/06 4:35	529.47
SWPW-2	8/25/06 3:40	435.03	SWPW-1	10/8/06 4:40	529.38
SWPW-2	8/25/06 3:45	435.01	SWPW-1	10/8/06 4:45	529.45
SWPW-2	8/25/06 3:50	435.02	SWPW-1	10/8/06 4:50	529.37
SWPW-2	8/25/06 3:55	435.02	SWPW-1	10/8/06 4:55	529.52
SWPW-2	8/25/06 4:00	434.97	SWPW-1	10/8/06 5:00	529.36
SWPW-2	8/25/06 4:05	435.00	SWPW-1	10/8/06 5:05	529.10
SWPW-2	8/25/06 4:10	435.01	SWPW-1	10/8/06 5:10	529.52
SWPW-2	8/25/06 4:15	435.01	SWPW-1	10/8/06 5:15	529.43
SWPW-2	8/25/06 4:20	434.99	SWPW-1	10/8/06 5:20	529.39
SWPW-2	8/25/06 4:25	434.99	SWPW-1	10/8/06 5:25	529.33
SWPW-2	8/25/06 4:30	435.00	SWPW-1	10/8/06 5:30	529.58
SWPW-2	8/25/06 4:35	434.98	SWPW-1	10/8/06 5:35	529.33
SWPW-2	8/25/06 4:40	434.99	SWPW-1	10/8/06 5:40	529.37
SWPW-2	8/25/06 4:45	435.00	SWPW-1	10/8/06 5:45	529.46
SWPW-2	8/25/06 4:50	434.98	SWPW-1	10/8/06 5:50	529.48
SWPW-2	8/25/06 4:55	434.99	SWPW-1	10/8/06 5:55	529.47
SWPW-2	8/25/06 5:00	434.99	SWPW-1	10/8/06 6:00	529.65
SWPW-2	8/25/06 5:05	434.93	SWPW-1	10/8/06 6:05	529.20
SWPW-2	8/25/06 5:10	434.97	SWPW-1	10/8/06 6:10	529.21
SWPW-2	8/25/06 5:15	434.98	SWPW-1	10/8/06 6:15	529.55
SWPW-2	8/25/06 5:20	434.97	SWPW-1	10/8/06 6:20	529.51
SWPW-2	8/25/06 5:25	434.95	SWPW-1	10/8/06 6:25	529.57
SWPW-2	8/25/06 5:30	434.95	SWPW-1	10/8/06 6:30	529.48
SWPW-2	8/25/06 5:35	434.94	SWPW-1	10/8/06 6:35	529.50
SWPW-2	8/25/06 5:40	434.95	SWPW-1	10/8/06 6:40	529.54
SWPW-2	8/25/06 5:45	434.94	SWPW-1	10/8/06 6:45	529.34
SWPW-2	8/25/06 5:50	434.94	SWPW-1	10/8/06 6:50	529.37
SWPW-2	8/25/06 5:55	434.92	SWPW-1	10/8/06 6:55	529.29
SWPW-2	8/25/06 6:00	434.92	SWPW-1	10/8/06 7:00	529.20
SWPW-2	8/25/06 6:05	434.93	SWPW-1	10/8/06 7:05	529.54
SWPW-2	8/25/06 6:10	434.93	SWPW-1	10/8/06 7:10	529.60
SWPW-2	8/25/06 6:15	434.91	SWPW-1	10/8/06 7:15	529.41
SWPW-2	8/25/06 6:20	434.92	SWPW-1	10/8/06 7:20	529.42
SWPW-2	8/25/06 6:25	434.88	SWPW-1	10/8/06 7:25	529.33
SWPW-2	8/25/06 6:30	434.92	SWPW-1	10/8/06 7:30	529.40
SWPW-2	8/25/06 6:35	434.90	SWPW-1	10/8/06 7:35	529.54
SWPW-2	8/25/06 6:40	434.91	SWPW-1	10/8/06 7:40	529.63
SWPW-2	8/25/06 6:45	434.90	SWPW-1	10/8/06 7:45	529.49
SWPW-2	8/25/06 6:50	434.92	SWPW-1	10/8/06 7:50	529.60
SWPW-2	8/25/06 6:55	434.91	SWPW-1	10/8/06 7:55	529.66
SWPW-2	8/25/06 7:00	434.90	SWPW-1	10/8/06 8:00	529.91
SWPW-2	8/25/06 7:05	434.90	SWPW-1	10/8/06 8:05	529.82
SWPW-2	8/25/06 7:10	434.91	SWPW-1	10/8/06 8:10	529.65
SWPW-2	8/25/06 7:15	434.90	SWPW-1	10/8/06 8:15	529.54
SWPW-2	8/25/06 7:20	434.89	SWPW-1	10/8/06 8:20	529.78
SWPW-2	8/25/06 7:25	434.89	SWPW-1	10/8/06 8:25	529.78
SWPW-2	8/25/06 7:30	434.89	SWPW-1	10/8/06 8:30	529.98
SWPW-2	8/25/06 7:35	434.89	SWPW-1	10/8/06 8:35	529.93
SWPW-2	8/25/06 7:40	434.89	SWPW-1	10/8/06 8:40	529.79
SWPW-2	8/25/06 7:45	434.89	SWPW-1	10/8/06 8:45	529.55
SWPW-2	8/25/06 7:50	434.88	SWPW-1	10/8/06 8:50	529.65
SWPW-2	8/25/06 7:55	434.85	SWPW-1	10/8/06 8:55	529.76
SWPW-2	8/25/06 8:00	434.85	SWPW-1	10/8/06 9:00	529.66
SWPW-2	8/25/06 8:05	434.86	SWPW-1	10/8/06 9:05	529.42
SWPW-2	8/25/06 8:10	434.86	SWPW-1	10/8/06 9:10	529.66
SWPW-2	8/25/06 8:15	434.90	SWPW-1	10/8/06 9:15	529.66
SWPW-2	8/25/06 8:20	434.90	SWPW-1	10/8/06 9:20	529.66
SWPW-2	8/25/06 8:25	434.90	SWPW-1	10/8/06 9:25	529.64
SWPW-2	8/25/06 8:30	434.86	SWPW-1	10/8/06 9:30	529.84
SWPW-2	8/25/06 8:35	434.86	SWPW-1	10/8/06 9:35	529.77
SWPW-2	8/25/06 8:40	434.85	SWPW-1	10/8/06 9:40	529.60
SWPW-2	8/25/06 8:45	434.88	SWPW-1	10/8/06 9:45	529.65
SWPW-2	8/25/06 8:50	434.87	SWPW-1	10/8/06 9:50	529.52
SWPW-2	8/25/06 8:55	434.88	SWPW-1	10/8/06 9:55	529.85
SWPW-2	8/25/06 9:00	434.87	SWPW-1	10/8/06 10:00	529.73
SWPW-2	8/25/06 9:05	434.87	SWPW-1	10/8/06 10:05	529.96
SWPW-2	8/25/06 9:10	434.86	SWPW-1	10/8/06 10:10	529.74
SWPW-2	8/25/06 9:15	434.87	SWPW-1	10/8/06 10:15	529.71
SWPW-2	8/25/06 9:20	434.86	SWPW-1	10/8/06 10:20	529.71
SWPW-2	8/25/06 9:25	434.85	SWPW-1	10/8/06 10:25	529.51
SWPW-2	8/25/06 9:30	434.86	SWPW-1	10/8/06 10:30	529.75
SWPW-2	8/25/06 9:35	434.82	SWPW-1	10/8/06 10:35	529.69
SWPW-2	8/25/06 9:40	434.87	SWPW-1	10/8/06 10:40	529.84
SWPW-2	8/25/06 9:45	434.89	SWPW-1	10/8/06 10:45	529.60
SWPW-2	8/25/06 9:50	434.85	SWPW-1	10/8/06 10:50	529.60
SWPW-2	8/25/06 9:55	434.86	SWPW-1	10/8/06 10:55	529.70
SWPW-2	8/25/06 10:00	434.86	SWPW-1	10/8/06 11:00	529.81
SWPW-2	8/25/06 10:05	434.86	SWPW-1	10/8/06 11:05	529.68
SWPW-2	8/25/06 10:10	434.89	SWPW-1	10/8/06 11:10	529.53
SWPW-2	8/25/06 10:15	434.86	SWPW-1	10/8/06 11:15	529.75
SWPW-2	8/25/06 10:20	434.86	SWPW-1	10/8/06 11:20	529.60
SWPW-2	8/25/06 10:25	434.85	SWPW-1	10/8/06 11:25	529.75
SWPW-2	8/25/06 10:30	434.85	SWPW-1	10/8/06 11:30	529.82
SWPW-2	8/25/06 10:35	434.85	SWPW-1	10/8/06 11:35	529.69

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	8/25/06 10:40	434.83	SWPW-1	10/8/06 11:40	529.69
SWPW-2	8/25/06 10:45	434.85	SWPW-1	10/8/06 11:45	529.74
SWPW-2	8/25/06 10:50	434.85	SWPW-1	10/8/06 11:50	529.66
SWPW-2	8/25/06 10:55	434.85	SWPW-1	10/8/06 11:55	529.49
SWPW-2	8/25/06 11:00	434.85	SWPW-1	10/8/06 12:00	529.88
SWPW-2	8/25/06 11:05	434.84	SWPW-1	10/8/06 12:05	529.60
SWPW-2	8/25/06 11:10	434.82	SWPW-1	10/8/06 12:10	529.72
SWPW-2	8/25/06 11:15	434.86	SWPW-1	10/8/06 12:15	529.71
SWPW-2	8/25/06 11:20	434.85	SWPW-1	10/8/06 12:20	529.65
SWPW-2	8/25/06 11:25	434.84	SWPW-1	10/8/06 12:25	529.68
SWPW-2	8/25/06 11:30	434.85	SWPW-1	10/8/06 12:30	529.95
SWPW-2	8/25/06 11:35	434.83	SWPW-1	10/8/06 12:35	529.45
SWPW-2	8/25/06 11:40	434.83	SWPW-1	10/8/06 12:40	529.49
SWPW-2	8/25/06 11:45	434.83	SWPW-1	10/8/06 12:45	529.64
SWPW-2	8/25/06 11:50	434.82	SWPW-1	10/8/06 12:50	529.73
SWPW-2	8/25/06 11:55	434.82	SWPW-1	10/8/06 12:55	529.66
SWPW-2	8/25/06 12:00	434.81	SWPW-1	10/8/06 13:00	529.65
SWPW-2	8/25/06 12:05	434.82	SWPW-1	10/8/06 13:05	529.68
SWPW-2	8/25/06 12:10	434.86	SWPW-1	10/8/06 13:10	529.53
SWPW-2	8/25/06 12:15	434.81	SWPW-1	10/8/06 13:15	529.60
SWPW-2	8/25/06 12:20	434.82	SWPW-1	10/8/06 13:20	529.56
SWPW-2	8/25/06 12:25	434.82	SWPW-1	10/8/06 13:25	529.86
SWPW-2	8/25/06 12:30	434.82	SWPW-1	10/8/06 13:30	530.11
SWPW-2	8/25/06 12:35	434.86	SWPW-1	10/8/06 13:35	529.96
SWPW-2	8/25/06 12:40	434.82	SWPW-1	10/8/06 13:40	529.74
SWPW-2	8/25/06 12:45	434.81	SWPW-1	10/8/06 13:45	529.70
SWPW-2	8/25/06 12:50	434.82	SWPW-1	10/8/06 13:50	530.13
SWPW-2	8/25/06 12:55	434.81	SWPW-1	10/8/06 13:55	529.81
SWPW-2	8/25/06 13:00	434.81	SWPW-1	10/8/06 14:00	529.82
SWPW-2	8/25/06 13:05	434.79	SWPW-1	10/8/06 14:05	529.91
SWPW-2	8/25/06 13:10	434.80	SWPW-1	10/8/06 14:10	529.94
SWPW-2	8/25/06 13:15	434.80	SWPW-1	10/8/06 14:15	530.30
SWPW-2	8/25/06 13:20	434.80	SWPW-1	10/8/06 14:20	530.16
SWPW-2	8/25/06 13:25	434.79	SWPW-1	10/8/06 14:25	530.24
SWPW-2	8/25/06 13:30	434.80	SWPW-1	10/8/06 14:30	530.01
SWPW-2	8/25/06 13:35	434.79	SWPW-1	10/8/06 14:35	530.10
SWPW-2	8/25/06 13:40	434.79	SWPW-1	10/8/06 14:40	530.10
SWPW-2	8/25/06 13:45	434.76	SWPW-1	10/8/06 14:45	530.22
SWPW-2	8/25/06 13:50	434.78	SWPW-1	10/8/06 14:50	530.30
SWPW-2	8/25/06 13:55	434.78	SWPW-1	10/8/06 14:55	530.38
SWPW-2	8/25/06 14:00	434.79	SWPW-1	10/8/06 15:00	530.40
SWPW-2	8/25/06 14:05	434.79	SWPW-1	10/8/06 15:05	530.08
SWPW-2	8/25/06 14:10	434.80	SWPW-1	10/8/06 15:10	530.34
SWPW-2	8/25/06 14:15	434.77	SWPW-1	10/8/06 15:15	530.19
SWPW-2	8/25/06 14:20	434.79	SWPW-1	10/8/06 15:20	530.40
SWPW-2	8/25/06 14:25	434.80	SWPW-1	10/8/06 15:25	530.02
SWPW-2	8/25/06 14:30	434.79	SWPW-1	10/8/06 15:30	530.16
SWPW-2	8/25/06 14:35	434.78	SWPW-1	10/8/06 15:35	530.30
SWPW-2	8/25/06 14:40	434.78	SWPW-1	10/8/06 15:40	530.35
SWPW-2	8/25/06 14:45	434.77	SWPW-1	10/8/06 15:45	530.27
SWPW-2	8/25/06 14:50	434.76	SWPW-1	10/8/06 15:50	530.23
SWPW-2	8/25/06 14:55	434.77	SWPW-1	10/8/06 15:55	530.23
SWPW-2	8/25/06 15:00	434.75	SWPW-1	10/8/06 16:00	530.46
SWPW-2	8/25/06 15:05	434.75	SWPW-1	10/8/06 16:05	530.38
SWPW-2	8/25/06 15:10	434.76	SWPW-1	10/8/06 16:10	529.99
SWPW-2	8/25/06 15:15	434.74	SWPW-1	10/8/06 16:15	530.26
SWPW-2	8/25/06 15:20	434.76	SWPW-1	10/8/06 16:20	530.34
SWPW-2	8/25/06 15:25	434.74	SWPW-1	10/8/06 16:25	530.10
SWPW-2	8/25/06 15:30	434.74	SWPW-1	10/8/06 16:30	530.31
SWPW-2	8/25/06 15:35	434.73	SWPW-1	10/8/06 16:35	530.29
SWPW-2	8/25/06 15:40	434.73	SWPW-1	10/8/06 16:40	529.95
SWPW-2	8/25/06 15:45	434.73	SWPW-1	10/8/06 16:45	529.90
SWPW-2	8/25/06 15:50	434.76	SWPW-1	10/8/06 16:50	530.13
SWPW-2	8/25/06 15:55	434.72	SWPW-1	10/8/06 16:55	530.07
SWPW-2	8/25/06 16:00	434.72	SWPW-1	10/8/06 17:00	530.32
SWPW-2	8/25/06 16:05	434.73	SWPW-1	10/8/06 17:05	530.13
SWPW-2	8/25/06 16:10	434.73	SWPW-1	10/8/06 17:10	529.82
SWPW-2	8/25/06 16:15	434.72	SWPW-1	10/8/06 17:15	529.75
SWPW-2	8/25/06 16:20	434.72	SWPW-1	10/8/06 17:20	529.83
SWPW-2	8/25/06 16:25	434.76	SWPW-1	10/8/06 17:25	529.93
SWPW-2	8/25/06 16:30	434.72	SWPW-1	10/8/06 17:30	529.83
SWPW-2	8/25/06 16:35	434.71	SWPW-1	10/8/06 17:35	529.91
SWPW-2	8/25/06 16:40	434.71	SWPW-1	10/8/06 17:40	530.00
SWPW-2	8/25/06 16:45	434.71	SWPW-1	10/8/06 17:45	529.76
SWPW-2	8/25/06 16:50	434.70	SWPW-1	10/8/06 17:50	529.88
SWPW-2	8/25/06 16:55	434.71	SWPW-1	10/8/06 17:55	529.70
SWPW-2	8/25/06 17:00	434.70	SWPW-1	10/8/06 18:00	529.88
SWPW-2	8/25/06 17:05	434.70	SWPW-1	10/8/06 18:05	529.77
SWPW-2	8/25/06 17:10	434.69	SWPW-1	10/8/06 18:10	529.86
SWPW-2	8/25/06 17:15	434.68	SWPW-1	10/8/06 18:15	529.77
SWPW-2	8/25/06 17:20	434.70	SWPW-1	10/8/06 18:20	529.99
SWPW-2	8/25/06 17:25	434.67	SWPW-1	10/8/06 18:25	529.99
SWPW-2	8/25/06 17:30	434.66	SWPW-1	10/8/06 18:30	529.95
SWPW-2	8/25/06 17:35	434.67	SWPW-1	10/8/06 18:35	529.88
SWPW-2	8/25/06 17:40	434.67	SWPW-1	10/8/06 18:40	529.58
SWPW-2	8/25/06 17:45	434.66	SWPW-1	10/8/06 18:45	529.88
SWPW-2	8/25/06 17:50	434.66	SWPW-1	10/8/06 18:50	529.81
SWPW-2	8/25/06 17:55	434.67	SWPW-1	10/8/06 18:55	529.81
SWPW-2	8/25/06 18:00	434.67	SWPW-1	10/8/06 19:00	529.86
SWPW-2	8/25/06 18:05	434.66	SWPW-1	10/8/06 19:05	529.93
SWPW-2	8/25/06 18:10	434.65	SWPW-1	10/8/06 19:10	529.97
SWPW-2	8/25/06 18:15	434.65	SWPW-1	10/8/06 19:15	529.99
SWPW-2	8/25/06 18:20	434.65	SWPW-1	10/8/06 19:20	530.16
SWPW-2	8/25/06 18:25	434.63	SWPW-1	10/8/06 19:25	529.81
SWPW-2	8/25/06 18:30	434.65	SWPW-1	10/8/06 19:30	529.98
SWPW-2	8/25/06 18:35	434.66	SWPW-1	10/8/06 19:35	530.04
SWPW-2	8/25/06 18:40	434.66	SWPW-1	10/8/06 19:40	530.01
SWPW-2	8/25/06 18:45	434.68	SWPW-1	10/8/06 19:45	530.24
SWPW-2	8/25/06 18:50	434.65	SWPW-1	10/8/06 19:50	530.41
SWPW-2	8/25/06 18:55	434.65	SWPW-1	10/8/06 19:55	530.16

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	8/25/06 19:00	434.65	SWPW-1	10/8/06 20:00	530.01
SWPW-2	8/25/06 19:05	434.66	SWPW-1	10/8/06 20:05	530.08
SWPW-2	8/25/06 19:10	434.67	SWPW-1	10/8/06 20:10	529.99
SWPW-2	8/25/06 19:15	434.66	SWPW-1	10/8/06 20:15	530.02
SWPW-2	8/25/06 19:20	434.65	SWPW-1	10/8/06 20:20	530.14
SWPW-2	8/25/06 19:25	434.65	SWPW-1	10/8/06 20:25	530.26
SWPW-2	8/25/06 19:30	434.67	SWPW-1	10/8/06 20:30	530.32
SWPW-2	8/25/06 19:35	434.67	SWPW-1	10/8/06 20:35	530.25
SWPW-2	8/25/06 19:40	434.67	SWPW-1	10/8/06 20:40	529.97
SWPW-2	8/25/06 19:45	434.66	SWPW-1	10/8/06 20:45	530.22
SWPW-2	8/25/06 19:50	434.66	SWPW-1	10/8/06 20:50	530.26
SWPW-2	8/25/06 19:55	434.66	SWPW-1	10/8/06 20:55	530.15
SWPW-2	8/25/06 20:00	434.67	SWPW-1	10/8/06 21:00	530.03
SWPW-2	8/25/06 20:05	434.66	SWPW-1	10/8/06 21:05	530.04
SWPW-2	8/25/06 20:10	434.68	SWPW-1	10/8/06 21:10	530.14
SWPW-2	8/25/06 20:15	434.65	SWPW-1	10/8/06 21:15	530.45
SWPW-2	8/25/06 20:20	434.65	SWPW-1	10/8/06 21:20	530.26
SWPW-2	8/25/06 20:25	434.64	SWPW-1	10/8/06 21:25	530.19
SWPW-2	8/25/06 20:30	434.64	SWPW-1	10/8/06 21:30	530.32
SWPW-2	8/25/06 20:35	434.65	SWPW-1	10/8/06 21:35	530.23
SWPW-2	8/25/06 20:40	434.65	SWPW-1	10/8/06 21:40	530.28
SWPW-2	8/25/06 20:45	434.65	SWPW-1	10/8/06 21:45	530.28
SWPW-2	8/25/06 20:50	434.64	SWPW-1	10/8/06 21:50	530.57
SWPW-2	8/25/06 20:55	434.64	SWPW-1	10/8/06 21:55	530.56
SWPW-2	8/25/06 21:00	434.65	SWPW-1	10/8/06 22:00	530.41
SWPW-2	8/25/06 21:05	434.64	SWPW-1	10/8/06 22:05	530.31
SWPW-2	8/25/06 21:10	434.64	SWPW-1	10/8/06 22:10	530.35
SWPW-2	8/25/06 21:15	434.64	SWPW-1	10/8/06 22:15	530.53
SWPW-2	8/25/06 21:20	434.63	SWPW-1	10/8/06 22:20	530.53
SWPW-2	8/25/06 21:25	434.63	SWPW-1	10/8/06 22:25	530.56
SWPW-2	8/25/06 21:30	434.63	SWPW-1	10/8/06 22:30	530.56
SWPW-2	8/25/06 21:35	434.63	SWPW-1	10/8/06 22:35	530.63
SWPW-2	8/25/06 21:40	434.63	SWPW-1	10/8/06 22:40	530.33
SWPW-2	8/25/06 21:45	434.63	SWPW-1	10/8/06 22:45	530.44
SWPW-2	8/25/06 21:50	434.67	SWPW-1	10/8/06 22:50	530.55
SWPW-2	8/25/06 21:55	434.62	SWPW-1	10/8/06 22:55	530.32
SWPW-2	8/25/06 22:00	434.62	SWPW-1	10/8/06 23:00	530.49
SWPW-2	8/25/06 22:05	434.62	SWPW-1	10/8/06 23:05	530.42
SWPW-2	8/25/06 22:10	434.61	SWPW-1	10/8/06 23:10	530.35
SWPW-2	8/25/06 22:15	434.62	SWPW-1	10/8/06 23:15	530.51
SWPW-2	8/25/06 22:20	434.62	SWPW-1	10/8/06 23:20	530.35
SWPW-2	8/25/06 22:25	434.62	SWPW-1	10/8/06 23:25	530.48
SWPW-2	8/25/06 22:30	434.62	SWPW-1	10/8/06 23:30	530.44
SWPW-2	8/25/06 22:35	434.62	SWPW-1	10/8/06 23:35	530.32
SWPW-2	8/25/06 22:40	434.63	SWPW-1	10/8/06 23:40	530.10
SWPW-2	8/25/06 22:45	434.62	SWPW-1	10/8/06 23:45	530.14
SWPW-2	8/25/06 22:50	434.62	SWPW-1	10/8/06 23:50	530.37
SWPW-2	8/25/06 22:55	434.63	SWPW-1	10/8/06 23:55	530.59
SWPW-2	8/25/06 23:00	434.62	SWPW-1	10/9/06 0:00	530.32
SWPW-2	8/25/06 23:05	434.61	SWPW-1	10/9/06 0:05	530.55
SWPW-2	8/25/06 23:10	434.61	SWPW-1	10/9/06 0:10	530.37
SWPW-2	8/25/06 23:15	434.61	SWPW-1	10/9/06 0:15	530.25
SWPW-2	8/25/06 23:20	434.61	SWPW-1	10/9/06 0:20	530.44
SWPW-2	8/25/06 23:25	434.62	SWPW-1	10/9/06 0:25	530.06
SWPW-2	8/25/06 23:30	434.62	SWPW-1	10/9/06 0:30	530.61
SWPW-2	8/25/06 23:35	434.62	SWPW-1	10/9/06 0:35	530.18
SWPW-2	8/25/06 23:40	434.63	SWPW-1	10/9/06 0:40	530.34
SWPW-2	8/25/06 23:45	434.64	SWPW-1	10/9/06 0:45	530.76
SWPW-2	8/25/06 23:50	434.62	SWPW-1	10/9/06 0:50	530.42
SWPW-2	8/25/06 23:55	434.62	SWPW-1	10/9/06 0:55	530.40
SWPW-2	8/26/06 0:00	434.63	SWPW-1	10/9/06 1:00	530.30
SWPW-2	8/26/06 0:05	434.62	SWPW-1	10/9/06 1:05	530.37
SWPW-2	8/26/06 0:10	434.62	SWPW-1	10/9/06 1:10	530.54
SWPW-2	8/26/06 0:15	434.62	SWPW-1	10/9/06 1:15	530.67
SWPW-2	8/26/06 0:20	434.61	SWPW-1	10/9/06 1:20	530.62
SWPW-2	8/26/06 0:25	434.61	SWPW-1	10/9/06 1:25	530.65
SWPW-2	8/26/06 0:30	434.65	SWPW-1	10/9/06 1:30	530.66
SWPW-2	8/26/06 0:35	434.60	SWPW-1	10/9/06 1:35	530.56
SWPW-2	8/26/06 0:40	434.63	SWPW-1	10/9/06 1:40	530.77
SWPW-2	8/26/06 0:45	434.60	SWPW-1	10/9/06 1:45	530.47
SWPW-2	8/26/06 0:50	434.63	SWPW-1	10/9/06 1:50	530.46
SWPW-2	8/26/06 0:55	434.61	SWPW-1	10/9/06 1:55	530.61
SWPW-2	8/26/06 1:00	434.61	SWPW-1	10/9/06 2:00	530.71
SWPW-2	8/26/06 1:05	434.61	SWPW-1	10/9/06 2:05	530.80
SWPW-2	8/26/06 1:10	434.61	SWPW-1	10/9/06 2:10	530.66
SWPW-2	8/26/06 1:15	434.61	SWPW-1	10/9/06 2:15	530.97
SWPW-2	8/26/06 1:20	434.60	SWPW-1	10/9/06 2:20	530.68
SWPW-2	8/26/06 1:25	434.60	SWPW-1	10/9/06 2:25	530.65
SWPW-2	8/26/06 1:30	434.60	SWPW-1	10/9/06 2:30	530.85
SWPW-2	8/26/06 1:35	434.60	SWPW-1	10/9/06 2:35	530.53
SWPW-2	8/26/06 1:40	434.60	SWPW-1	10/9/06 2:40	530.92
SWPW-2	8/26/06 1:45	434.61	SWPW-1	10/9/06 2:45	530.82
SWPW-2	8/26/06 1:50	434.61	SWPW-1	10/9/06 2:50	530.54
SWPW-2	8/26/06 1:55	434.60	SWPW-1	10/9/06 2:55	530.63
SWPW-2	8/26/06 2:00	434.60	SWPW-1	10/9/06 3:00	530.69
SWPW-2	8/26/06 2:05	434.59	SWPW-1	10/9/06 3:05	530.78
SWPW-2	8/26/06 2:10	434.59	SWPW-1	10/9/06 3:10	530.53
SWPW-2	8/26/06 2:15	434.59	SWPW-1	10/9/06 3:15	530.75
SWPW-2	8/26/06 2:20	434.59	SWPW-1	10/9/06 3:20	530.67
SWPW-2	8/26/06 2:25	434.59	SWPW-1	10/9/06 3:25	530.71
SWPW-2	8/26/06 2:30	434.60	SWPW-1	10/9/06 3:30	530.60
SWPW-2	8/26/06 2:35	434.58	SWPW-1	10/9/06 3:35	530.98
SWPW-2	8/26/06 2:40	434.60	SWPW-1	10/9/06 3:40	530.47
SWPW-2	8/26/06 2:45	434.58	SWPW-1	10/9/06 3:45	530.81
SWPW-2	8/26/06 2:50	434.58	SWPW-1	10/9/06 3:50	530.80
SWPW-2	8/26/06 2:55	434.58	SWPW-1	10/9/06 3:55	530.96
SWPW-2	8/26/06 3:00	434.58	SWPW-1	10/9/06 4:00	530.98
SWPW-2	8/26/06 3:05	434.57	SWPW-1	10/9/06 4:05	530.47
SWPW-2	8/26/06 3:10	434.58	SWPW-1	10/9/06 4:10	530.73
SWPW-2	8/26/06 3:15	434.58	SWPW-1	10/9/06 4:15	530.92

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	8/26/06 3:20	434.56	SWPW-1	10/9/06 4:20	530.86
SWPW-2	8/26/06 3:25	434.57	SWPW-1	10/9/06 4:25	530.88
SWPW-2	8/26/06 3:30	434.56	SWPW-1	10/9/06 4:30	530.87
SWPW-2	8/26/06 3:35	434.56	SWPW-1	10/9/06 4:35	530.84
SWPW-2	8/26/06 3:40	434.56	SWPW-1	10/9/06 4:40	530.79
SWPW-2	8/26/06 3:45	434.55	SWPW-1	10/9/06 4:45	530.74
SWPW-2	8/26/06 3:50	434.54	SWPW-1	10/9/06 4:50	530.94
SWPW-2	8/26/06 3:55	434.55	SWPW-1	10/9/06 4:55	530.60
SWPW-2	8/26/06 4:00	434.54	SWPW-1	10/9/06 5:00	530.93
SWPW-2	8/26/06 4:05	434.55	SWPW-1	10/9/06 5:05	530.73
SWPW-2	8/26/06 4:10	434.54	SWPW-1	10/9/06 5:10	530.82
SWPW-2	8/26/06 4:15	434.54	SWPW-1	10/9/06 5:15	530.88
SWPW-2	8/26/06 4:20	434.53	SWPW-1	10/9/06 5:20	530.85
SWPW-2	8/26/06 4:25	434.58	SWPW-1	10/9/06 5:25	530.93
SWPW-2	8/26/06 4:30	434.54	SWPW-1	10/9/06 5:30	530.81
SWPW-2	8/26/06 4:35	434.57	SWPW-1	10/9/06 5:35	530.76
SWPW-2	8/26/06 4:40	434.56	SWPW-1	10/9/06 5:40	531.11
SWPW-2	8/26/06 4:45	434.53	SWPW-1	10/9/06 5:45	530.93
SWPW-2	8/26/06 4:50	434.56	SWPW-1	10/9/06 5:50	530.81
SWPW-2	8/26/06 4:55	434.53	SWPW-1	10/9/06 5:55	530.55
SWPW-2	8/26/06 5:00	434.53	SWPW-1	10/9/06 6:00	530.93
SWPW-2	8/26/06 5:05	434.53	SWPW-1	10/9/06 6:05	530.69
SWPW-2	8/26/06 5:10	434.53	SWPW-1	10/9/06 6:10	531.12
SWPW-2	8/26/06 5:15	434.53	SWPW-1	10/9/06 6:15	530.85
SWPW-2	8/26/06 5:20	434.53	SWPW-1	10/9/06 6:20	530.80
SWPW-2	8/26/06 5:25	434.52	SWPW-1	10/9/06 6:25	531.09
SWPW-2	8/26/06 5:30	434.51	SWPW-1	10/9/06 6:30	530.95
SWPW-2	8/26/06 5:35	434.51	SWPW-1	10/9/06 6:35	531.03
SWPW-2	8/26/06 5:40	434.51	SWPW-1	10/9/06 6:40	531.07
SWPW-2	8/26/06 5:45	434.50	SWPW-1	10/9/06 6:45	530.87
SWPW-2	8/26/06 5:50	434.51	SWPW-1	10/9/06 6:50	531.02
SWPW-2	8/26/06 5:55	434.55	SWPW-1	10/9/06 6:55	531.02
SWPW-2	8/26/06 6:00	434.52	SWPW-1	10/9/06 7:00	531.04
SWPW-2	8/26/06 6:05	434.50	SWPW-1	10/9/06 7:05	530.71
SWPW-2	8/26/06 6:10	434.50	SWPW-1	10/9/06 7:10	530.80
SWPW-2	8/26/06 6:15	434.51	SWPW-1	10/9/06 7:15	531.04
SWPW-2	8/26/06 6:20	434.53	SWPW-1	10/9/06 7:20	531.10
SWPW-2	8/26/06 6:25	434.49	SWPW-1	10/9/06 7:25	531.03
SWPW-2	8/26/06 6:30	434.52	SWPW-1	10/9/06 7:30	530.72
SWPW-2	8/26/06 6:35	434.52	SWPW-1	10/9/06 7:35	530.83
SWPW-2	8/26/06 6:40	434.48	SWPW-1	10/9/06 7:40	531.23
SWPW-2	8/26/06 6:45	434.52	SWPW-1	10/9/06 7:45	531.13
SWPW-2	8/26/06 6:50	434.53	SWPW-1	10/9/06 7:50	531.16
SWPW-2	8/26/06 6:55	434.49	SWPW-1	10/9/06 7:55	531.29
SWPW-2	8/26/06 7:00	434.53	SWPW-1	10/9/06 8:00	531.02
SWPW-2	8/26/06 7:05	434.52	SWPW-1	10/9/06 8:05	531.24
SWPW-2	8/26/06 7:10	434.47	SWPW-1	10/9/06 8:10	531.09
SWPW-2	8/26/06 7:15	434.51	SWPW-1	10/9/06 8:15	530.89
SWPW-2	8/26/06 7:20	434.47	SWPW-1	10/9/06 8:20	530.97
SWPW-2	8/26/06 7:25	434.51	SWPW-1	10/9/06 8:25	531.00
SWPW-2	8/26/06 7:30	434.49	SWPW-1	10/9/06 8:30	531.03
SWPW-2	8/26/06 7:35	434.49	SWPW-1	10/9/06 8:35	531.01
SWPW-2	8/26/06 7:40	434.46	SWPW-1	10/9/06 8:40	531.09
SWPW-2	8/26/06 7:45	434.48	SWPW-1	10/9/06 8:45	531.17
SWPW-2	8/26/06 7:50	434.48	SWPW-1	10/9/06 8:50	530.89
SWPW-2	8/26/06 7:55	434.52	SWPW-1	10/9/06 8:55	531.04
SWPW-2	8/26/06 8:00	434.47	SWPW-1	10/9/06 9:00	531.20
SWPW-2	8/26/06 8:05	434.47	SWPW-1	10/9/06 9:05	530.86
SWPW-2	8/26/06 8:10	434.50	SWPW-1	10/9/06 9:10	531.26
SWPW-2	8/26/06 8:15	434.46	SWPW-1	10/9/06 9:15	531.16
SWPW-2	8/26/06 8:20	434.50	SWPW-1	10/9/06 9:20	531.26
SWPW-2	8/26/06 8:25	434.48	SWPW-1	10/9/06 9:25	531.18
SWPW-2	8/26/06 8:30	434.47	SWPW-1	10/9/06 9:30	530.98
SWPW-2	8/26/06 8:35	434.47	SWPW-1	10/9/06 9:35	531.14
SWPW-2	8/26/06 8:40	434.48	SWPW-1	10/9/06 9:40	530.85
SWPW-2	8/26/06 8:45	434.47	SWPW-1	10/9/06 9:45	531.10
SWPW-2	8/26/06 8:50	434.51	SWPW-1	10/9/06 9:50	530.92
SWPW-2	8/26/06 8:55	434.50	SWPW-1	10/9/06 9:55	531.08
SWPW-2	8/26/06 9:00	434.50	SWPW-1	10/9/06 10:00	530.95
SWPW-2	8/26/06 9:05	434.47	SWPW-1	10/9/06 10:05	531.16
SWPW-2	8/26/06 9:10	434.49	SWPW-1	10/9/06 10:10	531.02
SWPW-2	8/26/06 9:15	434.46	SWPW-1	10/9/06 10:15	531.00
SWPW-2	8/26/06 9:20	434.50	SWPW-1	10/9/06 10:20	530.79
SWPW-2	8/26/06 9:25	434.48	SWPW-1	10/9/06 10:25	531.03
SWPW-2	8/26/06 9:30	434.47	SWPW-1	10/9/06 10:30	530.93
SWPW-2	8/26/06 9:35	434.48	SWPW-1	10/9/06 10:35	530.98
SWPW-2	8/26/06 9:40	434.48	SWPW-1	10/9/06 10:40	531.40
SWPW-2	8/26/06 9:45	434.49	SWPW-1	10/9/06 10:45	531.18
SWPW-2	8/26/06 9:50	434.47	SWPW-1	10/9/06 10:50	530.87
SWPW-2	8/26/06 9:55	434.47	SWPW-1	10/9/06 10:55	530.94
SWPW-2	8/26/06 10:00	434.48	SWPW-1	10/9/06 11:00	531.21
SWPW-2	8/26/06 10:05	434.48	SWPW-1	10/9/06 11:05	530.91
SWPW-2	8/26/06 10:10	434.46	SWPW-1	10/9/06 11:10	531.23
SWPW-2	8/26/06 10:15	434.47	SWPW-1	10/9/06 11:15	531.22
SWPW-2	8/26/06 10:20	434.47	SWPW-1	10/9/06 11:20	531.16
SWPW-2	8/26/06 10:25	434.47	SWPW-1	10/9/06 11:25	531.08
SWPW-2	8/26/06 10:30	434.47	SWPW-1	10/9/06 11:30	531.00
SWPW-2	8/26/06 10:35	434.47	SWPW-1	10/9/06 11:35	531.07
SWPW-2	8/26/06 10:40	434.45	SWPW-1	10/9/06 11:40	531.25
SWPW-2	8/26/06 10:45	434.47	SWPW-1	10/9/06 11:45	530.88
SWPW-2	8/26/06 10:50	434.49	SWPW-1	10/9/06 11:50	531.26
SWPW-2	8/26/06 10:55	434.48	SWPW-1	10/9/06 11:55	531.10
SWPW-2	8/26/06 11:00	434.47	SWPW-1	10/9/06 12:00	531.21
SWPW-2	8/26/06 11:05	434.48	SWPW-1	10/9/06 12:05	531.28
SWPW-2	8/26/06 11:10	434.46	SWPW-1	10/9/06 12:10	531.14
SWPW-2	8/26/06 11:15	434.49	SWPW-1	10/9/06 12:15	531.44
SWPW-2	8/26/06 11:20	434.47	SWPW-1	10/9/06 12:20	531.28
SWPW-2	8/26/06 11:25	434.48	SWPW-1	10/9/06 12:25	531.28
SWPW-2	8/26/06 11:30	434.48	SWPW-1	10/9/06 12:30	531.11
SWPW-2	8/26/06 11:35	434.49	SWPW-1	10/9/06 12:35	531.38

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	8/26/06 11:40	434.48	SWPW-1	10/9/06 12:40	531.42
SWPW-2	8/26/06 11:45	434.45	SWPW-1	10/9/06 12:45	531.41
SWPW-2	8/26/06 11:50	434.49	SWPW-1	10/9/06 12:50	531.66
SWPW-2	8/26/06 11:55	434.45	SWPW-1	10/9/06 12:55	531.35
SWPW-2	8/26/06 12:00	434.50	SWPW-1	10/9/06 13:00	531.22
SWPW-2	8/26/06 12:05	434.48	SWPW-1	10/9/06 13:05	531.53
SWPW-2	8/26/06 12:10	434.45	SWPW-1	10/9/06 13:10	531.38
SWPW-2	8/26/06 12:15	434.48	SWPW-1	10/9/06 13:15	531.19
SWPW-2	8/26/06 12:20	434.44	SWPW-1	10/9/06 13:20	531.34
SWPW-2	8/26/06 12:25	434.48	SWPW-1	10/9/06 13:25	531.36
SWPW-2	8/26/06 12:30	434.45	SWPW-1	10/9/06 13:30	531.27
SWPW-2	8/26/06 12:35	434.48	SWPW-1	10/9/06 13:35	531.18
SWPW-2	8/26/06 12:40	434.48	SWPW-1	10/9/06 13:40	531.27
SWPW-2	8/26/06 12:45	434.47	SWPW-1	10/9/06 13:45	531.23
SWPW-2	8/26/06 12:50	434.47	SWPW-1	10/9/06 13:50	531.56
SWPW-2	8/26/06 12:55	434.48	SWPW-1	10/9/06 13:55	531.34
SWPW-2	8/26/06 13:00	434.47	SWPW-1	10/9/06 14:00	531.18
SWPW-2	8/26/06 13:05	434.47	SWPW-1	10/9/06 14:05	531.31
SWPW-2	8/26/06 13:10	434.47	SWPW-1	10/9/06 14:10	531.52
SWPW-2	8/26/06 13:15	434.45	SWPW-1	10/9/06 14:15	531.25
SWPW-2	8/26/06 13:20	434.48	SWPW-1	10/9/06 14:20	531.13
SWPW-2	8/26/06 13:25	434.46	SWPW-1	10/9/06 14:25	531.36
SWPW-2	8/26/06 13:30	434.47	SWPW-1	10/9/06 14:30	531.48
SWPW-2	8/26/06 13:35	434.47	SWPW-1	10/9/06 14:35	531.38
SWPW-2	8/26/06 13:40	434.47	SWPW-1	10/9/06 14:40	531.37
SWPW-2	8/26/06 13:45	434.47	SWPW-1	10/9/06 14:45	531.66
SWPW-2	8/26/06 13:50	434.46	SWPW-1	10/9/06 14:50	531.21
SWPW-2	8/26/06 13:55	434.46	SWPW-1	10/9/06 14:55	531.49
SWPW-2	8/26/06 14:00	434.46	SWPW-1	10/9/06 15:00	531.33
SWPW-2	8/26/06 14:05	434.46	SWPW-1	10/9/06 15:05	531.35
SWPW-2	8/26/06 14:10	434.46	SWPW-1	10/9/06 15:10	531.38
SWPW-2	8/26/06 14:15	434.45	SWPW-1	10/9/06 15:15	531.50
SWPW-2	8/26/06 14:20	434.47	SWPW-1	10/9/06 15:20	531.28
SWPW-2	8/26/06 14:25	434.48	SWPW-1	10/9/06 15:25	531.36
SWPW-2	8/26/06 14:30	434.42	SWPW-1	10/9/06 15:30	531.26
SWPW-2	8/26/06 14:35	434.42	SWPW-1	10/9/06 15:35	531.27
SWPW-2	8/26/06 14:40	434.45	SWPW-1	10/9/06 15:40	531.57
SWPW-2	8/26/06 14:45	434.42	SWPW-1	10/9/06 15:45	531.37
SWPW-2	8/26/06 14:50	434.43	SWPW-1	10/9/06 15:50	531.40
SWPW-2	8/26/06 14:55	434.43	SWPW-1	10/9/06 15:55	531.34
SWPW-2	8/26/06 15:00	434.43	SWPW-1	10/9/06 16:00	531.71
SWPW-2	8/26/06 15:05	434.44	SWPW-1	10/9/06 16:05	531.49
SWPW-2	8/26/06 15:10	434.43	SWPW-1	10/9/06 16:10	531.47
SWPW-2	8/26/06 15:15	434.42	SWPW-1	10/9/06 16:15	531.54
SWPW-2	8/26/06 15:20	434.42	SWPW-1	10/9/06 16:20	531.40
SWPW-2	8/26/06 15:25	434.46	SWPW-1	10/9/06 16:25	531.39
SWPW-2	8/26/06 15:30	434.42	SWPW-1	10/9/06 16:30	531.53
SWPW-2	8/26/06 15:35	434.42	SWPW-1	10/9/06 16:35	531.56
SWPW-2	8/26/06 15:40	434.42	SWPW-1	10/9/06 16:40	531.30
SWPW-2	8/26/06 15:45	434.41	SWPW-1	10/9/06 16:45	531.39
SWPW-2	8/26/06 15:50	434.40	SWPW-1	10/9/06 16:50	531.68
SWPW-2	8/26/06 15:55	434.40	SWPW-1	10/9/06 16:55	531.47
SWPW-2	8/26/06 16:00	434.40	SWPW-1	10/9/06 17:00	531.38
SWPW-2	8/26/06 16:05	434.40	SWPW-1	10/9/06 17:05	531.50
SWPW-2	8/26/06 16:10	434.40	SWPW-1	10/9/06 17:10	531.62
SWPW-2	8/26/06 16:15	434.42	SWPW-1	10/9/06 17:15	531.48
SWPW-2	8/26/06 16:20	434.41	SWPW-1	10/9/06 17:20	531.31
SWPW-2	8/26/06 16:25	434.41	SWPW-1	10/9/06 17:25	531.75
SWPW-2	8/26/06 16:30	434.40	SWPW-1	10/9/06 17:30	531.64
SWPW-2	8/26/06 16:35	434.43	SWPW-1	10/9/06 17:35	531.38
SWPW-2	8/26/06 16:40	434.39	SWPW-1	10/9/06 17:40	531.50
SWPW-2	8/26/06 16:45	434.37	SWPW-1	10/9/06 17:45	531.41
SWPW-2	8/26/06 16:50	434.38	SWPW-1	10/9/06 17:50	531.44
SWPW-2	8/26/06 16:55	434.41	SWPW-1	10/9/06 17:55	531.23
SWPW-2	8/26/06 17:00	434.40	SWPW-1	10/9/06 18:00	531.23
SWPW-2	8/26/06 17:05	434.41	SWPW-1	10/9/06 18:05	531.71
SWPW-2	8/26/06 17:10	434.39	SWPW-1	10/9/06 18:10	531.36
SWPW-2	8/26/06 17:15	434.39	SWPW-1	10/9/06 18:15	531.69
SWPW-2	8/26/06 17:20	434.38	SWPW-1	10/9/06 18:20	531.38
SWPW-2	8/26/06 17:25	434.39	SWPW-1	10/9/06 18:25	531.31
SWPW-2	8/26/06 17:30	434.41	SWPW-1	10/9/06 18:30	531.40
SWPW-2	8/26/06 17:35	434.41	SWPW-1	10/9/06 18:35	531.48
SWPW-2	8/26/06 17:40	434.37	SWPW-1	10/9/06 18:40	531.50
SWPW-2	8/26/06 17:45	434.38	SWPW-1	10/9/06 18:45	531.54
SWPW-2	8/26/06 17:50	434.38	SWPW-1	10/9/06 18:50	531.61
SWPW-2	8/26/06 17:55	434.37	SWPW-1	10/9/06 18:55	531.60
SWPW-2	8/26/06 18:00	434.39	SWPW-1	10/9/06 19:00	531.67
SWPW-2	8/26/06 18:05	434.41	SWPW-1	10/9/06 19:05	531.62
SWPW-2	8/26/06 18:10	434.36	SWPW-1	10/9/06 19:10	531.15
SWPW-2	8/26/06 18:15	434.36	SWPW-1	10/9/06 19:15	531.65
SWPW-2	8/26/06 18:20	434.41	SWPW-1	10/9/06 19:20	531.66
SWPW-2	8/26/06 18:25	434.40	SWPW-1	10/9/06 19:25	531.40
SWPW-2	8/26/06 18:30	434.38	SWPW-1	10/9/06 19:30	531.62
SWPW-2	8/26/06 18:35	434.40	SWPW-1	10/9/06 19:35	531.46
SWPW-2	8/26/06 18:40	434.39	SWPW-1	10/9/06 19:40	531.20
SWPW-2	8/26/06 18:45	434.37	SWPW-1	10/9/06 19:45	531.39
SWPW-2	8/26/06 18:50	434.38	SWPW-1	10/9/06 19:50	531.49
SWPW-2	8/26/06 18:55	434.38	SWPW-1	10/9/06 19:55	531.44
SWPW-2	8/26/06 19:00	434.39	SWPW-1	10/9/06 20:00	531.33
SWPW-2	8/26/06 19:05	434.38	SWPW-1	10/9/06 20:05	531.58
SWPW-2	8/26/06 19:10	434.37	SWPW-1	10/9/06 20:10	531.32
SWPW-2	8/26/06 19:15	434.37	SWPW-1	10/9/06 20:15	531.57
SWPW-2	8/26/06 19:20	434.36	SWPW-1	10/9/06 20:20	531.58
SWPW-2	8/26/06 19:25	434.35	SWPW-1	10/9/06 20:25	531.84
SWPW-2	8/26/06 19:30	434.36	SWPW-1	10/9/06 20:30	531.59
SWPW-2	8/26/06 19:35	434.36	SWPW-1	10/9/06 20:35	531.74
SWPW-2	8/26/06 19:40	434.35	SWPW-1	10/9/06 20:40	531.46
SWPW-2	8/26/06 19:45	434.35	SWPW-1	10/9/06 20:45	531.75
SWPW-2	8/26/06 19:50	434.33	SWPW-1	10/9/06 20:50	531.49
SWPW-2	8/26/06 19:55	434.33	SWPW-1	10/9/06 20:55	531.61

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	8/26/06 20:00	434.32	SWPW-1	10/9/06 21:00	531.58
SWPW-2	8/26/06 20:05	434.32	SWPW-1	10/9/06 21:05	531.43
SWPW-2	8/26/06 20:10	434.31	SWPW-1	10/9/06 21:10	531.62
SWPW-2	8/26/06 20:15	434.33	SWPW-1	10/9/06 21:15	531.44
SWPW-2	8/26/06 20:20	434.34	SWPW-1	10/9/06 21:20	531.46
SWPW-2	8/26/06 20:25	434.30	SWPW-1	10/9/06 21:25	531.46
SWPW-2	8/26/06 20:30	434.30	SWPW-1	10/9/06 21:30	531.64
SWPW-2	8/26/06 20:35	434.33	SWPW-1	10/9/06 21:35	531.58
SWPW-2	8/26/06 20:40	434.31	SWPW-1	10/9/06 21:40	531.54
SWPW-2	8/26/06 20:45	434.34	SWPW-1	10/9/06 21:45	531.44
SWPW-2	8/26/06 20:50	434.34	SWPW-1	10/9/06 21:50	531.55
SWPW-2	8/26/06 20:55	434.34	SWPW-1	10/9/06 21:55	531.70
SWPW-2	8/26/06 21:00	434.34	SWPW-1	10/9/06 22:00	531.69
SWPW-2	8/26/06 21:05	434.31	SWPW-1	10/9/06 22:05	531.32
SWPW-2	8/26/06 21:10	434.34	SWPW-1	10/9/06 22:10	531.30
SWPW-2	8/26/06 21:15	434.35	SWPW-1	10/9/06 22:15	531.44
SWPW-2	8/26/06 21:20	434.32	SWPW-1	10/9/06 22:20	531.21
SWPW-2	8/26/06 21:25	434.31	SWPW-1	10/9/06 22:25	531.30
SWPW-2	8/26/06 21:30	434.35	SWPW-1	10/9/06 22:30	531.49
SWPW-2	8/26/06 21:35	434.34	SWPW-1	10/9/06 22:35	531.72
SWPW-2	8/26/06 21:40	434.35	SWPW-1	10/9/06 22:40	531.31
SWPW-2	8/26/06 21:45	434.30	SWPW-1	10/9/06 22:45	531.61
SWPW-2	8/26/06 21:50	434.31	SWPW-1	10/9/06 22:50	531.90
SWPW-2	8/26/06 21:55	434.35	SWPW-1	10/9/06 22:55	531.55
SWPW-2	8/26/06 22:00	434.31	SWPW-1	10/9/06 23:00	531.31
SWPW-2	8/26/06 22:05	434.31	SWPW-1	10/9/06 23:05	531.71
SWPW-2	8/26/06 22:10	434.34	SWPW-1	10/9/06 23:10	531.42
SWPW-2	8/26/06 22:15	434.34	SWPW-1	10/9/06 23:15	531.36
SWPW-2	8/26/06 22:20	434.35	SWPW-1	10/9/06 23:20	531.69
SWPW-2	8/26/06 22:25	434.34	SWPW-1	10/9/06 23:25	531.55
SWPW-2	8/26/06 22:30	434.35	SWPW-1	10/9/06 23:30	531.57
SWPW-2	8/26/06 22:35	434.31	SWPW-1	10/9/06 23:35	531.53
SWPW-2	8/26/06 22:40	434.35	SWPW-1	10/9/06 23:40	531.44
SWPW-2	8/26/06 22:45	434.31	SWPW-1	10/9/06 23:45	531.56
SWPW-2	8/26/06 22:50	434.34	SWPW-1	10/9/06 23:50	531.55
SWPW-2	8/26/06 22:55	434.30	SWPW-1	10/9/06 23:55	531.61
SWPW-2	8/26/06 23:00	434.34	SWPW-1	10/10/06 0:00	531.41
SWPW-2	8/26/06 23:05	434.34	SWPW-1	10/10/06 0:05	531.31
SWPW-2	8/26/06 23:10	434.34	SWPW-1	10/10/06 0:10	531.29
SWPW-2	8/26/06 23:15	434.33	SWPW-1	10/10/06 0:15	531.39
SWPW-2	8/26/06 23:20	434.33	SWPW-1	10/10/06 0:20	531.41
SWPW-2	8/26/06 23:25	434.33	SWPW-1	10/10/06 0:25	531.57
SWPW-2	8/26/06 23:30	434.34	SWPW-1	10/10/06 0:30	531.36
SWPW-2	8/26/06 23:35	434.33	SWPW-1	10/10/06 0:35	531.15
SWPW-2	8/26/06 23:40	434.30	SWPW-1	10/10/06 0:40	531.16
SWPW-2	8/26/06 23:45	434.34	SWPW-1	10/10/06 0:45	531.37
SWPW-2	8/26/06 23:50	434.31	SWPW-1	10/10/06 0:50	531.39
SWPW-2	8/26/06 23:55	434.34	SWPW-1	10/10/06 0:55	531.48
SWPW-2	8/27/06 0:00	434.34	SWPW-1	10/10/06 1:00	531.30
SWPW-2	8/27/06 0:05	434.34	SWPW-1	10/10/06 1:05	531.48
SWPW-2	8/27/06 0:10	434.33	SWPW-1	10/10/06 1:10	531.39
SWPW-2	8/27/06 0:15	434.31	SWPW-1	10/10/06 1:15	531.27
SWPW-2	8/27/06 0:20	434.36	SWPW-1	10/10/06 1:20	531.43
SWPW-2	8/27/06 0:25	434.35	SWPW-1	10/10/06 1:25	531.35
SWPW-2	8/27/06 0:30	434.31	SWPW-1	10/10/06 1:30	531.24
SWPW-2	8/27/06 0:35	434.34	SWPW-1	10/10/06 1:35	531.19
SWPW-2	8/27/06 0:40	434.33	SWPW-1	10/10/06 1:40	531.23
SWPW-2	8/27/06 0:45	434.34	SWPW-1	10/10/06 1:45	531.44
SWPW-2	8/27/06 0:50	434.31	SWPW-1	10/10/06 1:50	531.50
SWPW-2	8/27/06 0:55	434.34	SWPW-1	10/10/06 1:55	531.46
SWPW-2	8/27/06 1:00	434.32	SWPW-1	10/10/06 2:00	531.11
SWPW-2	8/27/06 1:05	434.34	SWPW-1	10/10/06 2:05	531.54
SWPW-2	8/27/06 1:10	434.34	SWPW-1	10/10/06 2:10	531.12
SWPW-2	8/27/06 1:15	434.30	SWPW-1	10/10/06 2:15	531.44
SWPW-2	8/27/06 1:20	434.34	SWPW-1	10/10/06 2:20	531.18
SWPW-2	8/27/06 1:25	434.30	SWPW-1	10/10/06 2:25	531.47
SWPW-2	8/27/06 1:30	434.31	SWPW-1	10/10/06 2:30	531.32
SWPW-2	8/27/06 1:35	434.34	SWPW-1	10/10/06 2:35	531.28
SWPW-2	8/27/06 1:40	434.30	SWPW-1	10/10/06 2:40	531.28
SWPW-2	8/27/06 1:45	434.33	SWPW-1	10/10/06 2:45	531.60
SWPW-2	8/27/06 1:50	434.33	SWPW-1	10/10/06 2:50	531.49
SWPW-2	8/27/06 1:55	434.33	SWPW-1	10/10/06 2:55	531.43
SWPW-2	8/27/06 2:00	434.30	SWPW-1	10/10/06 3:00	531.32
SWPW-2	8/27/06 2:05	434.34	SWPW-1	10/10/06 3:05	531.33
SWPW-2	8/27/06 2:10	434.32	SWPW-1	10/10/06 3:10	531.34
SWPW-2	8/27/06 2:15	434.30	SWPW-1	10/10/06 3:15	531.51
SWPW-2	8/27/06 2:20	434.33	SWPW-1	10/10/06 3:20	531.48
SWPW-2	8/27/06 2:25	434.32	SWPW-1	10/10/06 3:25	531.16
SWPW-2	8/27/06 2:30	434.34	SWPW-1	10/10/06 3:30	531.59
SWPW-2	8/27/06 2:35	434.29	SWPW-1	10/10/06 3:35	531.39
SWPW-2	8/27/06 2:40	434.33	SWPW-1	10/10/06 3:40	531.39
SWPW-2	8/27/06 2:45	434.30	SWPW-1	10/10/06 3:45	531.59
SWPW-2	8/27/06 2:50	434.31	SWPW-1	10/10/06 3:50	531.30
SWPW-2	8/27/06 2:55	434.33	SWPW-1	10/10/06 3:55	531.52
SWPW-2	8/27/06 3:00	434.32	SWPW-1	10/10/06 4:00	531.30
SWPW-2	8/27/06 3:05	434.32	SWPW-1	10/10/06 4:05	531.41
SWPW-2	8/27/06 3:10	434.33	SWPW-1	10/10/06 4:10	531.13
SWPW-2	8/27/06 3:15	434.29	SWPW-1	10/10/06 4:15	531.51
SWPW-2	8/27/06 3:20	434.32	SWPW-1	10/10/06 4:20	531.55
SWPW-2	8/27/06 3:25	434.32	SWPW-1	10/10/06 4:25	531.35
SWPW-2	8/27/06 3:30	434.32	SWPW-1	10/10/06 4:30	531.63
SWPW-2	8/27/06 3:35	434.31	SWPW-1	10/10/06 4:35	531.37
SWPW-2	8/27/06 3:40	434.31	SWPW-1	10/10/06 4:40	531.43
SWPW-2	8/27/06 3:45	434.32	SWPW-1	10/10/06 4:45	531.65
SWPW-2	8/27/06 3:50	434.27	SWPW-1	10/10/06 4:50	531.68
SWPW-2	8/27/06 3:55	434.31	SWPW-1	10/10/06 4:55	531.52
SWPW-2	8/27/06 4:00	434.29	SWPW-1	10/10/06 5:00	531.56
SWPW-2	8/27/06 4:05	434.29	SWPW-1	10/10/06 5:05	531.38
SWPW-2	8/27/06 4:10	434.29	SWPW-1	10/10/06 5:10	531.43
SWPW-2	8/27/06 4:15	434.30	SWPW-1	10/10/06 5:15	531.47

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	8/27/06 4:20	434.31	SWPW-1	10/10/06 5:20	531.53
SWPW-2	8/27/06 4:25	434.28	SWPW-1	10/10/06 5:25	531.41
SWPW-2	8/27/06 4:30	434.28	SWPW-1	10/10/06 5:30	531.34
SWPW-2	8/27/06 4:35	434.28	SWPW-1	10/10/06 5:35	531.45
SWPW-2	8/27/06 4:40	434.27	SWPW-1	10/10/06 5:40	531.37
SWPW-2	8/27/06 4:45	434.30	SWPW-1	10/10/06 5:45	531.34
SWPW-2	8/27/06 4:50	434.27	SWPW-1	10/10/06 5:50	531.57
SWPW-2	8/27/06 4:55	434.29	SWPW-1	10/10/06 5:55	531.21
SWPW-2	8/27/06 5:00	434.29	SWPW-1	10/10/06 6:00	531.32
SWPW-2	8/27/06 5:05	434.30	SWPW-1	10/10/06 6:05	531.55
SWPW-2	8/27/06 5:10	434.26	SWPW-1	10/10/06 6:10	531.29
SWPW-2	8/27/06 5:15	434.26	SWPW-1	10/10/06 6:15	531.37
SWPW-2	8/27/06 5:20	434.29	SWPW-1	10/10/06 6:20	531.53
SWPW-2	8/27/06 5:25	434.29	SWPW-1	10/10/06 6:25	531.26
SWPW-2	8/27/06 5:30	434.28	SWPW-1	10/10/06 6:30	531.46
SWPW-2	8/27/06 5:35	434.28	SWPW-1	10/10/06 6:35	531.34
SWPW-2	8/27/06 5:40	434.26	SWPW-1	10/10/06 6:40	531.57
SWPW-2	8/27/06 5:45	434.28	SWPW-1	10/10/06 6:45	531.48
SWPW-2	8/27/06 5:50	434.25	SWPW-1	10/10/06 6:50	531.24
SWPW-2	8/27/06 5:55	434.28	SWPW-1	10/10/06 6:55	531.47
SWPW-2	8/27/06 6:00	434.28	SWPW-1	10/10/06 7:00	531.40
SWPW-2	8/27/06 6:05	434.27	SWPW-1	10/10/06 7:05	531.49
SWPW-2	8/27/06 6:10	434.28	SWPW-1	10/10/06 7:10	531.51
SWPW-2	8/27/06 6:15	434.28	SWPW-1	10/10/06 7:15	531.43
SWPW-2	8/27/06 6:20	434.28	SWPW-1	10/10/06 7:20	531.46
SWPW-2	8/27/06 6:25	434.26	SWPW-1	10/10/06 7:25	531.44
SWPW-2	8/27/06 6:30	434.26	SWPW-1	10/10/06 7:30	531.32
SWPW-2	8/27/06 6:35	434.27	SWPW-1	10/10/06 7:35	531.48
SWPW-2	8/27/06 6:40	434.28	SWPW-1	10/10/06 7:40	531.22
SWPW-2	8/27/06 6:45	434.26	SWPW-1	10/10/06 7:45	531.45
SWPW-2	8/27/06 6:50	434.27	SWPW-1	10/10/06 7:50	531.41
SWPW-2	8/27/06 6:55	434.27	SWPW-1	10/10/06 7:55	531.50
SWPW-2	8/27/06 7:00	434.25	SWPW-1	10/10/06 8:00	531.23
SWPW-2	8/27/06 7:05	434.25	SWPW-1	10/10/06 8:05	531.37
SWPW-2	8/27/06 7:10	434.25	SWPW-1	10/10/06 8:10	531.52
SWPW-2	8/27/06 7:15	434.30	SWPW-1	10/10/06 8:15	531.22
SWPW-2	8/27/06 7:20	434.27	SWPW-1	10/10/06 8:20	531.31
SWPW-2	8/27/06 7:25	434.27	SWPW-1	10/10/06 8:25	531.02
SWPW-2	8/27/06 7:30	434.28	SWPW-1	10/10/06 8:30	531.29
SWPW-2	8/27/06 7:35	434.27	SWPW-1	10/10/06 8:35	531.34
SWPW-2	8/27/06 7:40	434.27	SWPW-1	10/10/06 8:40	531.25
SWPW-2	8/27/06 7:45	434.27	SWPW-1	10/10/06 8:45	531.37
SWPW-2	8/27/06 7:50	434.22	SWPW-1	10/10/06 8:50	531.44
SWPW-2	8/27/06 7:55	434.22	SWPW-1	10/10/06 8:55	531.36
SWPW-2	8/27/06 8:00	434.26	SWPW-1	10/10/06 9:00	531.19
SWPW-2	8/27/06 8:05	434.22	SWPW-1	10/10/06 9:05	531.52
SWPW-2	8/27/06 8:10	434.25	SWPW-1	10/10/06 9:10	531.35
SWPW-2	8/27/06 8:15	434.26	SWPW-1	10/10/06 9:15	531.32
SWPW-2	8/27/06 8:20	434.26	SWPW-1	10/10/06 9:20	531.33
SWPW-2	8/27/06 8:25	434.26	SWPW-1	10/10/06 9:25	531.35
SWPW-2	8/27/06 8:30	434.25	SWPW-1	10/10/06 9:30	531.18
SWPW-2	8/27/06 8:35	434.25	SWPW-1	10/10/06 9:35	531.44
SWPW-2	8/27/06 8:40	434.25	SWPW-1	10/10/06 9:40	531.58
SWPW-2	8/27/06 8:45	434.25	SWPW-1	10/10/06 9:45	531.44
SWPW-2	8/27/06 8:50	434.24	SWPW-1	10/10/06 9:50	531.24
SWPW-2	8/27/06 8:55	434.21	SWPW-1	10/10/06 9:55	531.13
SWPW-2	8/27/06 9:00	434.25	SWPW-1	10/10/06 10:00	531.34
SWPW-2	8/27/06 9:05	434.24	SWPW-1	10/10/06 10:05	531.30
SWPW-2	8/27/06 9:10	434.25	SWPW-1	10/10/06 10:10	531.42
SWPW-2	8/27/06 9:15	434.25	SWPW-1	10/10/06 10:15	531.39
SWPW-2	8/27/06 9:20	434.24	SWPW-1	10/10/06 10:20	531.36
SWPW-2	8/27/06 9:25	434.25	SWPW-1	10/10/06 10:25	531.56
SWPW-2	8/27/06 9:30	434.26	SWPW-1	10/10/06 10:30	531.45
SWPW-2	8/27/06 9:35	434.25	SWPW-1	10/10/06 10:35	531.26
SWPW-2	8/27/06 9:40	434.24	SWPW-1	10/10/06 10:40	531.51
SWPW-2	8/27/06 9:45	434.25	SWPW-1	10/10/06 10:45	531.38
SWPW-2	8/27/06 9:50	434.24	SWPW-1	10/10/06 10:50	531.20
SWPW-2	8/27/06 9:55	434.24	SWPW-1	10/10/06 10:55	531.72
SWPW-2	8/27/06 10:00	434.25	SWPW-1	10/10/06 11:00	531.56
SWPW-2	8/27/06 10:05	434.21	SWPW-1	10/10/06 11:05	531.61
SWPW-2	8/27/06 10:10	434.25	SWPW-1	10/10/06 11:10	531.50
SWPW-2	8/27/06 10:15	434.25	SWPW-1	10/10/06 11:15	531.34
SWPW-2	8/27/06 10:20	434.25	SWPW-1	10/10/06 11:20	531.75
SWPW-2	8/27/06 10:25	434.22	SWPW-1	10/10/06 11:25	531.56
SWPW-2	8/27/06 10:30	434.25	SWPW-1	10/10/06 11:30	531.65
SWPW-2	8/27/06 10:35	434.23	SWPW-1	10/10/06 11:35	531.42
SWPW-2	8/27/06 10:40	434.23	SWPW-1	10/10/06 11:40	531.45
SWPW-2	8/27/06 10:45	434.23	SWPW-1	10/10/06 11:45	531.71
SWPW-2	8/27/06 10:50	434.24	SWPW-1	10/10/06 11:50	531.64
SWPW-2	8/27/06 10:55	434.24	SWPW-1	10/10/06 11:55	531.58
SWPW-2	8/27/06 11:00	434.24	SWPW-1	10/10/06 12:00	531.68
SWPW-2	8/27/06 11:05	434.23	SWPW-1	10/10/06 12:05	531.53
SWPW-2	8/27/06 11:10	434.23	SWPW-1	10/10/06 12:10	531.37
SWPW-2	8/27/06 11:15	434.25	SWPW-1	10/10/06 12:15	531.51
SWPW-2	8/27/06 11:20	434.20	SWPW-1	10/10/06 12:20	531.47
SWPW-2	8/27/06 11:25	434.23	SWPW-1	10/10/06 12:25	531.64
SWPW-2	8/27/06 11:30	434.24	SWPW-1	10/10/06 12:30	531.53
SWPW-2	8/27/06 11:35	434.23	SWPW-1	10/10/06 12:35	531.48
SWPW-2	8/27/06 11:40	434.24	SWPW-1	10/10/06 12:40	531.46
SWPW-2	8/27/06 11:45	434.25	SWPW-1	10/10/06 12:45	531.39
SWPW-2	8/27/06 11:50	434.21	SWPW-1	10/10/06 12:50	531.69
SWPW-2	8/27/06 11:55	434.26	SWPW-1	10/10/06 12:55	531.72
SWPW-2	8/27/06 12:00	434.23	SWPW-1	10/10/06 13:00	531.34
SWPW-2	8/27/06 12:05	434.22	SWPW-1	10/10/06 13:05	531.76
SWPW-2	8/27/06 12:10	434.23	SWPW-1	10/10/06 13:10	531.39
SWPW-2	8/27/06 12:15	434.23	SWPW-1	10/10/06 13:15	531.46
SWPW-2	8/27/06 12:20	434.24	SWPW-1	10/10/06 13:20	531.36
SWPW-2	8/27/06 12:25	434.24	SWPW-1	10/10/06 13:25	531.56
SWPW-2	8/27/06 12:30	434.19	SWPW-1	10/10/06 13:30	531.60
SWPW-2	8/27/06 12:35	434.25	SWPW-1	10/10/06 13:35	531.42

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	8/27/06 12:40	434.25	SWPW-1	10/10/06 13:40	531.55
SWPW-2	8/27/06 12:45	434.21	SWPW-1	10/10/06 13:45	531.56
SWPW-2	8/27/06 12:50	434.20	SWPW-1	10/10/06 13:50	531.70
SWPW-2	8/27/06 12:55	434.25	SWPW-1	10/10/06 13:55	531.58
SWPW-2	8/27/06 13:00	434.21	SWPW-1	10/10/06 14:00	531.47
SWPW-2	8/27/06 13:05	434.24	SWPW-1	10/10/06 14:05	531.63
SWPW-2	8/27/06 13:10	434.24	SWPW-1	10/10/06 14:10	531.57
SWPW-2	8/27/06 13:15	434.23	SWPW-1	10/10/06 14:15	531.62
SWPW-2	8/27/06 13:20	434.24	SWPW-1	10/10/06 14:20	531.61
SWPW-2	8/27/06 13:25	434.24	SWPW-1	10/10/06 14:25	531.49
SWPW-2	8/27/06 13:30	434.21	SWPW-1	10/10/06 14:30	531.69
SWPW-2	8/27/06 13:35	434.24	SWPW-1	10/10/06 14:35	531.47
SWPW-2	8/27/06 13:40	434.24	SWPW-1	10/10/06 14:40	531.42
SWPW-2	8/27/06 13:45	434.21	SWPW-1	10/10/06 14:45	531.74
SWPW-2	8/27/06 13:50	434.25	SWPW-1	10/10/06 14:50	531.51
SWPW-2	8/27/06 13:55	434.20	SWPW-1	10/10/06 14:55	531.47
SWPW-2	8/27/06 14:00	434.22	SWPW-1	10/10/06 15:00	531.44
SWPW-2	8/27/06 14:05	434.24	SWPW-1	10/10/06 15:05	531.50
SWPW-2	8/27/06 14:10	434.21	SWPW-1	10/10/06 15:10	531.63
SWPW-2	8/27/06 14:15	434.22	SWPW-1	10/10/06 15:15	531.48
SWPW-2	8/27/06 14:20	434.25	SWPW-1	10/10/06 15:20	531.43
SWPW-2	8/27/06 14:25	434.25	SWPW-1	10/10/06 15:25	531.38
SWPW-2	8/27/06 14:30	434.21	SWPW-1	10/10/06 15:30	531.69
SWPW-2	8/27/06 14:35	434.19	SWPW-1	10/10/06 15:35	531.66
SWPW-2	8/27/06 14:40	434.20	SWPW-1	10/10/06 15:40	531.29
SWPW-2	8/27/06 14:45	434.21	SWPW-1	10/10/06 15:45	531.59
SWPW-2	8/27/06 14:50	434.24	SWPW-1	10/10/06 15:50	531.59
SWPW-2	8/27/06 14:55	434.24	SWPW-1	10/10/06 15:55	531.55
SWPW-2	8/27/06 15:00	434.24	SWPW-1	10/10/06 16:00	531.30
SWPW-2	8/27/06 15:05	434.21	SWPW-1	10/10/06 16:05	531.60
SWPW-2	8/27/06 15:10	434.20	SWPW-1	10/10/06 16:10	531.49
SWPW-2	8/27/06 15:15	434.19	SWPW-1	10/10/06 16:15	531.41
SWPW-2	8/27/06 15:20	434.21	SWPW-1	10/10/06 16:20	531.41
SWPW-2	8/27/06 15:25	434.19	SWPW-1	10/10/06 16:25	531.62
SWPW-2	8/27/06 15:30	434.21	SWPW-1	10/10/06 16:30	531.37
SWPW-2	8/27/06 15:35	434.21	SWPW-1	10/10/06 16:35	531.75
SWPW-2	8/27/06 15:40	434.20	SWPW-1	10/10/06 16:40	531.32
SWPW-2	8/27/06 15:45	434.19	SWPW-1	10/10/06 16:45	531.68
SWPW-2	8/27/06 15:50	434.21	SWPW-1	10/10/06 16:50	531.32
SWPW-2	8/27/06 15:55	434.24	SWPW-1	10/10/06 16:55	531.42
SWPW-2	8/27/06 16:00	434.21	SWPW-1	10/10/06 17:00	531.52
SWPW-2	8/27/06 16:05	434.20	SWPW-1	10/10/06 17:05	531.27
SWPW-2	8/27/06 16:10	434.19	SWPW-1	10/10/06 17:10	531.54
SWPW-2	8/27/06 16:15	434.22	SWPW-1	10/10/06 17:15	531.51
SWPW-2	8/27/06 16:20	434.19	SWPW-1	10/10/06 17:20	531.29
SWPW-2	8/27/06 16:25	434.18	SWPW-1	10/10/06 17:25	531.66
SWPW-2	8/27/06 16:30	434.23	SWPW-1	10/10/06 17:30	531.67
SWPW-2	8/27/06 16:35	434.19	SWPW-1	10/10/06 17:35	531.72
SWPW-2	8/27/06 16:40	434.21	SWPW-1	10/10/06 17:40	531.49
SWPW-2	8/27/06 16:45	434.22	SWPW-1	10/10/06 17:45	531.60
SWPW-2	8/27/06 16:50	434.21	SWPW-1	10/10/06 17:50	531.61
SWPW-2	8/27/06 16:55	434.20	SWPW-1	10/10/06 17:55	531.45
SWPW-2	8/27/06 17:00	434.21	SWPW-1	10/10/06 18:00	531.73
SWPW-2	8/27/06 17:05	434.19	SWPW-1	10/10/06 18:05	531.48
SWPW-2	8/27/06 17:10	434.22	SWPW-1	10/10/06 18:10	531.58
SWPW-2	8/27/06 17:15	434.20	SWPW-1	10/10/06 18:15	531.81
SWPW-2	8/27/06 17:20	434.16	SWPW-1	10/10/06 18:20	531.47
SWPW-2	8/27/06 17:25	434.20	SWPW-1	10/10/06 18:25	531.35
SWPW-2	8/27/06 17:30	434.16	SWPW-1	10/10/06 18:30	531.65
SWPW-2	8/27/06 17:35	434.20	SWPW-1	10/10/06 18:35	531.48
SWPW-2	8/27/06 17:40	434.21	SWPW-1	10/10/06 18:40	531.21
SWPW-2	8/27/06 17:45	434.19	SWPW-1	10/10/06 18:45	531.24
SWPW-2	8/27/06 17:50	434.20	SWPW-1	10/10/06 18:50	531.27
SWPW-2	8/27/06 17:55	434.16	SWPW-1	10/10/06 18:55	531.32
SWPW-2	8/27/06 18:00	434.20	SWPW-1	10/10/06 19:00	531.18
SWPW-2	8/27/06 18:05	434.19	SWPW-1	10/10/06 19:05	531.47
SWPW-2	8/27/06 18:10	434.19	SWPW-1	10/10/06 19:10	531.52
SWPW-2	8/27/06 18:15	434.20	SWPW-1	10/10/06 19:15	531.67
SWPW-2	8/27/06 18:20	434.20	SWPW-1	10/10/06 19:20	531.39
SWPW-2	8/27/06 18:25	434.19	SWPW-1	10/10/06 19:25	531.31
SWPW-2	8/27/06 18:30	434.19	SWPW-1	10/10/06 19:30	531.70
SWPW-2	8/27/06 18:35	434.19	SWPW-1	10/10/06 19:35	531.61
SWPW-2	8/27/06 18:40	434.19	SWPW-1	10/10/06 19:40	531.62
SWPW-2	8/27/06 18:45	434.20	SWPW-1	10/10/06 19:45	531.72
SWPW-2	8/27/06 18:50	434.19	SWPW-1	10/10/06 19:50	531.48
SWPW-2	8/27/06 18:55	434.17	SWPW-1	10/10/06 19:55	531.60
SWPW-2	8/27/06 19:00	434.17	SWPW-1	10/10/06 20:00	531.73
SWPW-2	8/27/06 19:05	434.17	SWPW-1	10/10/06 20:05	531.72
SWPW-2	8/27/06 19:10	434.20	SWPW-1	10/10/06 20:10	531.21
SWPW-2	8/27/06 19:15	434.17	SWPW-1	10/10/06 20:15	531.59
SWPW-2	8/27/06 19:20	434.20	SWPW-1	10/10/06 20:20	531.64
SWPW-2	8/27/06 19:25	434.20	SWPW-1	10/10/06 20:25	531.68
SWPW-2	8/27/06 19:30	434.15	SWPW-1	10/10/06 20:30	531.58
SWPW-2	8/27/06 19:35	434.17	SWPW-1	10/10/06 20:35	531.71
SWPW-2	8/27/06 19:40	434.16	SWPW-1	10/10/06 20:40	531.48
SWPW-2	8/27/06 19:45	434.15	SWPW-1	10/10/06 20:45	531.74
SWPW-2	8/27/06 19:50	434.16	SWPW-1	10/10/06 20:50	531.67
SWPW-2	8/27/06 19:55	434.19	SWPW-1	10/10/06 20:55	531.88
SWPW-2	8/27/06 20:00	434.16	SWPW-1	10/10/06 21:00	531.72
SWPW-2	8/27/06 20:05	434.16	SWPW-1	10/10/06 21:05	531.71
SWPW-2	8/27/06 20:10	434.18	SWPW-1	10/10/06 21:10	531.48
SWPW-2	8/27/06 20:15	434.20	SWPW-1	10/10/06 21:15	531.38
SWPW-2	8/27/06 20:20	434.16	SWPW-1	10/10/06 21:20	531.50
SWPW-2	8/27/06 20:25	434.19	SWPW-1	10/10/06 21:25	531.30
SWPW-2	8/27/06 20:30	434.19	SWPW-1	10/10/06 21:30	531.49
SWPW-2	8/27/06 20:35	434.19	SWPW-1	10/10/06 21:35	531.66
SWPW-2	8/27/06 20:40	434.19	SWPW-1	10/10/06 21:40	531.40
SWPW-2	8/27/06 20:45	434.20	SWPW-1	10/10/06 21:45	531.41
SWPW-2	8/27/06 20:50	434.19	SWPW-1	10/10/06 21:50	531.74
SWPW-2	8/27/06 20:55	434.16	SWPW-1	10/10/06 21:55	531.63

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	8/27/06 21:00	434.20	SWPW-1	10/10/06 22:00	531.71
SWPW-2	8/27/06 21:05	434.19	SWPW-1	10/10/06 22:05	531.53
SWPW-2	8/27/06 21:10	434.18	SWPW-1	10/10/06 22:10	531.89
SWPW-2	8/27/06 21:15	434.18	SWPW-1	10/10/06 22:15	531.66
SWPW-2	8/27/06 21:20	434.18	SWPW-1	10/10/06 22:20	531.84
SWPW-2	8/27/06 21:25	434.18	SWPW-1	10/10/06 22:25	531.46
SWPW-2	8/27/06 21:30	434.14	SWPW-1	10/10/06 22:30	531.59
SWPW-2	8/27/06 21:35	434.18	SWPW-1	10/10/06 22:35	531.42
SWPW-2	8/27/06 21:40	434.18	SWPW-1	10/10/06 22:40	531.59
SWPW-2	8/27/06 21:45	434.18	SWPW-1	10/10/06 22:45	531.53
SWPW-2	8/27/06 21:50	434.18	SWPW-1	10/10/06 22:50	531.61
SWPW-2	8/27/06 21:55	434.19	SWPW-1	10/10/06 22:55	531.54
SWPW-2	8/27/06 22:00	434.18	SWPW-1	10/10/06 23:00	531.83
SWPW-2	8/27/06 22:05	434.19	SWPW-1	10/10/06 23:05	531.74
SWPW-2	8/27/06 22:10	434.18	SWPW-1	10/10/06 23:10	531.51
SWPW-2	8/27/06 22:15	434.19	SWPW-1	10/10/06 23:15	531.54
SWPW-2	8/27/06 22:20	434.18	SWPW-1	10/10/06 23:20	531.45
SWPW-2	8/27/06 22:25	434.18	SWPW-1	10/10/06 23:25	531.59
SWPW-2	8/27/06 22:30	434.19	SWPW-1	10/10/06 23:30	531.62
SWPW-2	8/27/06 22:35	434.19	SWPW-1	10/10/06 23:35	531.47
SWPW-2	8/27/06 22:40	434.19	SWPW-1	10/10/06 23:40	531.44
SWPW-2	8/27/06 22:45	434.18	SWPW-1	10/10/06 23:45	531.82
SWPW-2	8/27/06 22:50	434.18	SWPW-1	10/10/06 23:50	531.69
SWPW-2	8/27/06 22:55	434.19	SWPW-1	10/10/06 23:55	531.70
SWPW-2	8/27/06 23:00	434.17	SWPW-1	10/11/06 0:00	531.49
SWPW-2	8/27/06 23:05	434.18	SWPW-1	10/11/06 0:05	531.71
SWPW-2	8/27/06 23:10	434.19	SWPW-1	10/11/06 0:10	531.76
SWPW-2	8/27/06 23:15	434.21	SWPW-1	10/11/06 0:15	531.60
SWPW-2	8/27/06 23:20	434.18	SWPW-1	10/11/06 0:20	531.52
SWPW-2	8/27/06 23:25	434.15	SWPW-1	10/11/06 0:25	531.62
SWPW-2	8/27/06 23:30	434.19	SWPW-1	10/11/06 0:30	531.81
SWPW-2	8/27/06 23:35	434.18	SWPW-1	10/11/06 0:35	531.76
SWPW-2	8/27/06 23:40	434.18	SWPW-1	10/11/06 0:40	532.05
SWPW-2	8/27/06 23:45	434.18	SWPW-1	10/11/06 0:45	531.83
SWPW-2	8/27/06 23:50	434.19	SWPW-1	10/11/06 0:50	531.71
SWPW-2	8/27/06 23:55	434.19	SWPW-1	10/11/06 0:55	531.97
SWPW-2	8/28/06 0:00	434.19	SWPW-1	10/11/06 1:00	531.92
SWPW-2	8/28/06 0:05	434.18	SWPW-1	10/11/06 1:05	531.93
SWPW-2	8/28/06 0:10	434.19	SWPW-1	10/11/06 1:10	531.57
SWPW-2	8/28/06 0:15	434.15	SWPW-1	10/11/06 1:15	531.74
SWPW-2	8/28/06 0:20	434.20	SWPW-1	10/11/06 1:20	531.70
SWPW-2	8/28/06 0:25	434.19	SWPW-1	10/11/06 1:25	531.91
SWPW-2	8/28/06 0:30	434.19	SWPW-1	10/11/06 1:30	531.97
SWPW-2	8/28/06 0:35	434.18	SWPW-1	10/11/06 1:35	531.57
SWPW-2	8/28/06 0:40	434.18	SWPW-1	10/11/06 1:40	531.79
SWPW-2	8/28/06 0:45	434.18	SWPW-1	10/11/06 1:45	531.92
SWPW-2	8/28/06 0:50	434.18	SWPW-1	10/11/06 1:50	531.94
SWPW-2	8/28/06 0:55	434.19	SWPW-1	10/11/06 1:55	531.78
SWPW-2	8/28/06 1:00	434.18	SWPW-1	10/11/06 2:00	531.70
SWPW-2	8/28/06 1:05	434.19	SWPW-1	10/11/06 2:05	531.69
SWPW-2	8/28/06 1:10	434.20	SWPW-1	10/11/06 2:10	531.87
SWPW-2	8/28/06 1:15	434.20	SWPW-1	10/11/06 2:15	531.92
SWPW-2	8/28/06 1:20	434.19	SWPW-1	10/11/06 2:20	531.62
SWPW-2	8/28/06 1:25	434.19	SWPW-1	10/11/06 2:25	531.75
SWPW-2	8/28/06 1:30	434.20	SWPW-1	10/11/06 2:30	531.82
SWPW-2	8/28/06 1:35	434.20	SWPW-1	10/11/06 2:35	531.60
SWPW-2	8/28/06 1:40	434.20	SWPW-1	10/11/06 2:40	531.64
SWPW-2	8/28/06 1:45	434.20	SWPW-1	10/11/06 2:45	531.72
SWPW-2	8/28/06 1:50	434.20	SWPW-1	10/11/06 2:50	531.92
SWPW-2	8/28/06 1:55	434.20	SWPW-1	10/11/06 2:55	531.65
SWPW-2	8/28/06 2:00	434.20	SWPW-1	10/11/06 3:00	531.88
SWPW-2	8/28/06 2:05	434.20	SWPW-1	10/11/06 3:05	531.78
SWPW-2	8/28/06 2:10	434.17	SWPW-1	10/11/06 3:10	531.91
SWPW-2	8/28/06 2:15	434.20	SWPW-1	10/11/06 3:15	531.68
SWPW-2	8/28/06 2:20	434.16	SWPW-1	10/11/06 3:20	531.62
SWPW-2	8/28/06 2:25	434.19	SWPW-1	10/11/06 3:25	531.74
SWPW-2	8/28/06 2:30	434.21	SWPW-1	10/11/06 3:30	531.94
SWPW-2	8/28/06 2:35	434.19	SWPW-1	10/11/06 3:35	531.63
SWPW-2	8/28/06 2:40	434.19	SWPW-1	10/11/06 3:40	531.79
SWPW-2	8/28/06 2:45	434.20	SWPW-1	10/11/06 3:45	531.52
SWPW-2	8/28/06 2:50	434.19	SWPW-1	10/11/06 3:50	531.98
SWPW-2	8/28/06 2:55	434.19	SWPW-1	10/11/06 3:55	531.99
SWPW-2	8/28/06 3:00	434.18	SWPW-1	10/11/06 4:00	531.93
SWPW-2	8/28/06 3:05	434.19	SWPW-1	10/11/06 4:05	531.92
SWPW-2	8/28/06 3:10	434.18	SWPW-1	10/11/06 4:10	531.75
SWPW-2	8/28/06 3:15	434.19	SWPW-1	10/11/06 4:15	531.57
SWPW-2	8/28/06 3:20	434.19	SWPW-1	10/11/06 4:20	531.83
SWPW-2	8/28/06 3:25	434.19	SWPW-1	10/11/06 4:25	531.58
SWPW-2	8/28/06 3:30	434.20	SWPW-1	10/11/06 4:30	531.87
SWPW-2	8/28/06 3:35	434.18	SWPW-1	10/11/06 4:35	531.78
SWPW-2	8/28/06 3:40	434.18	SWPW-1	10/11/06 4:40	531.77
SWPW-2	8/28/06 3:45	434.19	SWPW-1	10/11/06 4:45	532.00
SWPW-2	8/28/06 3:50	434.19	SWPW-1	10/11/06 4:50	531.93
SWPW-2	8/28/06 3:55	434.18	SWPW-1	10/11/06 4:55	531.87
SWPW-2	8/28/06 4:00	434.19	SWPW-1	10/11/06 5:00	531.94
SWPW-2	8/28/06 4:05	434.18	SWPW-1	10/11/06 5:05	531.79
SWPW-2	8/28/06 4:10	434.18	SWPW-1	10/11/06 5:10	532.09
SWPW-2	8/28/06 4:15	434.19	SWPW-1	10/11/06 5:15	531.85
SWPW-2	8/28/06 4:20	434.19	SWPW-1	10/11/06 5:20	531.70
SWPW-2	8/28/06 4:25	434.19	SWPW-1	10/11/06 5:25	531.80
SWPW-2	8/28/06 4:30	434.19	SWPW-1	10/11/06 5:30	532.07
SWPW-2	8/28/06 4:35	434.19	SWPW-1	10/11/06 5:35	532.02
SWPW-2	8/28/06 4:40	434.18	SWPW-1	10/11/06 5:40	531.82
SWPW-2	8/28/06 4:45	434.18	SWPW-1	10/11/06 5:45	531.91
SWPW-2	8/28/06 4:50	434.17	SWPW-1	10/11/06 5:50	532.01
SWPW-2	8/28/06 4:55	434.17	SWPW-1	10/11/06 5:55	531.86
SWPW-2	8/28/06 5:00	434.18	SWPW-1	10/11/06 6:00	532.03
SWPW-2	8/28/06 5:05	434.17	SWPW-1	10/11/06 6:05	531.93
SWPW-2	8/28/06 5:10	434.19	SWPW-1	10/11/06 6:10	532.02
SWPW-2	8/28/06 5:15	434.18	SWPW-1	10/11/06 6:15	531.50

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	8/28/06 5:20	434.18	SWPW-1	10/11/06 6:20	531.81
SWPW-2	8/28/06 5:25	434.18	SWPW-1	10/11/06 6:25	531.75
SWPW-2	8/28/06 5:30	434.14	SWPW-1	10/11/06 6:30	531.89
SWPW-2	8/28/06 5:35	434.14	SWPW-1	10/11/06 6:35	531.83
SWPW-2	8/28/06 5:40	434.17	SWPW-1	10/11/06 6:40	531.92
SWPW-2	8/28/06 5:45	434.14	SWPW-1	10/11/06 6:45	532.06
SWPW-2	8/28/06 5:50	434.17	SWPW-1	10/11/06 6:50	531.77
SWPW-2	8/28/06 5:55	434.17	SWPW-1	10/11/06 6:55	531.82
SWPW-2	8/28/06 6:00	434.16	SWPW-1	10/11/06 7:00	532.09
SWPW-2	8/28/06 6:05	434.18	SWPW-1	10/11/06 7:05	531.85
SWPW-2	8/28/06 6:10	434.15	SWPW-1	10/11/06 7:10	531.76
SWPW-2	8/28/06 6:15	434.15	SWPW-1	10/11/06 7:15	531.87
SWPW-2	8/28/06 6:20	434.15	SWPW-1	10/11/06 7:20	531.94
SWPW-2	8/28/06 6:25	434.16	SWPW-1	10/11/06 7:25	531.90
SWPW-2	8/28/06 6:30	434.17	SWPW-1	10/11/06 7:30	532.05
SWPW-2	8/28/06 6:35	434.16	SWPW-1	10/11/06 7:35	531.77
SWPW-2	8/28/06 6:40	434.16	SWPW-1	10/11/06 7:40	531.93
SWPW-2	8/28/06 6:45	434.16	SWPW-1	10/11/06 7:45	531.74
SWPW-2	8/28/06 6:50	434.16	SWPW-1	10/11/06 7:50	531.93
SWPW-2	8/28/06 6:55	434.15	SWPW-1	10/11/06 7:55	532.07
SWPW-2	8/28/06 7:00	434.15	SWPW-1	10/11/06 8:00	531.99
SWPW-2	8/28/06 7:05	434.15	SWPW-1	10/11/06 8:05	531.72
SWPW-2	8/28/06 7:10	434.14	SWPW-1	10/11/06 8:10	531.70
SWPW-2	8/28/06 7:15	434.15	SWPW-1	10/11/06 8:15	531.79
SWPW-2	8/28/06 7:20	434.18	SWPW-1	10/11/06 8:20	531.83
SWPW-2	8/28/06 7:25	434.14	SWPW-1	10/11/06 8:25	531.84
SWPW-2	8/28/06 7:30	434.14	SWPW-1	10/11/06 8:30	531.71
SWPW-2	8/28/06 7:35	434.18	SWPW-1	10/11/06 8:35	531.97
SWPW-2	8/28/06 7:40	434.15	SWPW-1	10/11/06 8:40	532.00
SWPW-2	8/28/06 7:45	434.15	SWPW-1	10/11/06 8:45	531.56
SWPW-2	8/28/06 7:50	434.15	SWPW-1	10/11/06 8:50	531.76
SWPW-2	8/28/06 7:55	434.15	SWPW-1	10/11/06 8:55	531.72
SWPW-2	8/28/06 8:00	434.15	SWPW-1	10/11/06 9:00	531.69
SWPW-2	8/28/06 8:05	434.15	SWPW-1	10/11/06 9:05	531.70
SWPW-2	8/28/06 8:10	434.15	SWPW-1	10/11/06 9:10	531.69
SWPW-2	8/28/06 8:15	434.15	SWPW-1	10/11/06 9:15	531.71
SWPW-2	8/28/06 8:20	434.15	SWPW-1	10/11/06 9:20	531.52
SWPW-2	8/28/06 8:25	434.15	SWPW-1	10/11/06 9:25	531.68
SWPW-2	8/28/06 8:30	434.15	SWPW-1	10/11/06 9:30	531.68
SWPW-2	8/28/06 8:35	434.15	SWPW-1	10/11/06 9:35	531.75
SWPW-2	8/28/06 8:40	434.15	SWPW-1	10/11/06 9:40	531.66
SWPW-2	8/28/06 8:45	434.15	SWPW-1	10/11/06 9:45	531.63
SWPW-2	8/28/06 8:50	434.15	SWPW-1	10/11/06 9:50	531.73
SWPW-2	8/28/06 8:55	434.15	SWPW-1	10/11/06 9:55	531.89
SWPW-2	8/28/06 9:00	434.15	SWPW-1	10/11/06 10:00	531.70
SWPW-2	8/28/06 9:05	434.15	SWPW-1	10/11/06 10:05	531.71
SWPW-2	8/28/06 9:10	434.15	SWPW-1	10/11/06 10:10	531.58
SWPW-2	8/28/06 9:15	434.14	SWPW-1	10/11/06 10:15	531.48
SWPW-2	8/28/06 9:20	434.15	SWPW-1	10/11/06 10:20	531.61
SWPW-2	8/28/06 9:25	434.14	SWPW-1	10/11/06 10:25	531.66
SWPW-2	8/28/06 9:30	434.14	SWPW-1	10/11/06 10:30	531.73
SWPW-2	8/28/06 9:35	434.14	SWPW-1	10/11/06 10:35	531.78
SWPW-2	8/28/06 9:40	434.14	SWPW-1	10/11/06 10:40	531.71
SWPW-2	8/28/06 9:45	434.14	SWPW-1	10/11/06 10:45	531.76
SWPW-2	8/28/06 9:50	434.13	SWPW-1	10/11/06 10:50	531.87
SWPW-2	8/28/06 9:55	434.17	SWPW-1	10/11/06 10:55	531.84
SWPW-2	8/28/06 10:00	434.14	SWPW-1	10/11/06 11:00	532.06
SWPW-2	8/28/06 10:05	434.14	SWPW-1	10/11/06 11:05	531.92
SWPW-2	8/28/06 10:10	434.15	SWPW-1	10/11/06 11:10	531.89
SWPW-2	8/28/06 10:15	434.15	SWPW-1	10/11/06 11:15	531.95
SWPW-2	8/28/06 10:20	434.14	SWPW-1	10/11/06 11:20	531.99
SWPW-2	8/28/06 10:25	434.14	SWPW-1	10/11/06 11:25	531.96
SWPW-2	8/28/06 10:30	434.14	SWPW-1	10/11/06 11:30	531.81
SWPW-2	8/28/06 10:35	434.15	SWPW-1	10/11/06 11:35	532.01
SWPW-2	8/28/06 10:40	434.15	SWPW-1	10/11/06 11:40	532.09
SWPW-2	8/28/06 10:45	434.16	SWPW-1	10/11/06 11:45	531.84
SWPW-2	8/28/06 10:50	434.16	SWPW-1	10/11/06 11:50	531.80
SWPW-2	8/28/06 10:55	434.16	SWPW-1	10/11/06 11:55	531.80
SWPW-2	8/28/06 11:00	434.16	SWPW-1	10/11/06 12:00	532.01
SWPW-2	8/28/06 11:05	434.16	SWPW-1	10/11/06 12:05	531.76
SWPW-2	8/28/06 11:10	434.16	SWPW-1	10/11/06 12:10	532.01
SWPW-2	8/28/06 11:15	434.14	SWPW-1	10/11/06 12:15	532.01
SWPW-2	8/28/06 11:20	434.15	SWPW-1	10/11/06 12:20	532.04
SWPW-2	8/28/06 11:25	434.14	SWPW-1	10/11/06 12:25	531.91
SWPW-2	8/28/06 11:30	434.14	SWPW-1	10/11/06 12:30	531.84
SWPW-2	8/28/06 11:35	434.14	SWPW-1	10/11/06 12:35	531.92
SWPW-2	8/28/06 11:40	434.14	SWPW-1	10/11/06 12:40	531.92
SWPW-2	8/28/06 11:45	434.15	SWPW-1	10/11/06 12:45	531.96
SWPW-2	8/28/06 11:50	434.14	SWPW-1	10/11/06 12:50	531.58
SWPW-2	8/28/06 11:55	434.14	SWPW-1	10/11/06 12:55	532.03
SWPW-2	8/28/06 12:00	434.13	SWPW-1	10/11/06 13:00	531.84
SWPW-2	8/28/06 12:05	434.14	SWPW-1	10/11/06 13:05	531.90
SWPW-2	8/28/06 12:10	434.14	SWPW-1	10/11/06 13:10	531.83
SWPW-2	8/28/06 12:15	434.14	SWPW-1	10/11/06 13:15	532.03
SWPW-2	8/28/06 12:20	434.16	SWPW-1	10/11/06 13:20	532.23
SWPW-2	8/28/06 12:25	434.17	SWPW-1	10/11/06 13:25	531.91
SWPW-2	8/28/06 12:30	434.15	SWPW-1	10/11/06 13:30	531.70
SWPW-2	8/28/06 12:35	434.15	SWPW-1	10/11/06 13:35	531.99
SWPW-2	8/28/06 12:40	434.16	SWPW-1	10/11/06 13:40	531.84
SWPW-2	8/28/06 12:45	434.15	SWPW-1	10/11/06 13:45	532.16
SWPW-2	8/28/06 12:50	434.16	SWPW-1	10/11/06 13:50	532.09
SWPW-2	8/28/06 12:55	434.15	SWPW-1	10/11/06 13:55	532.08
SWPW-2	8/28/06 13:00	434.16	SWPW-1	10/11/06 14:00	531.99
SWPW-2	8/28/06 13:05	434.17	SWPW-1	10/11/06 14:05	532.10
SWPW-2	8/28/06 13:10	434.17	SWPW-1	10/11/06 14:10	532.02
SWPW-2	8/28/06 13:15	434.13	SWPW-1	10/11/06 14:15	532.01
SWPW-2	8/28/06 13:20	434.13	SWPW-1	10/11/06 14:20	532.00
SWPW-2	8/28/06 13:25	434.12	SWPW-1	10/11/06 14:25	532.01
SWPW-2	8/28/06 13:30	434.16	SWPW-1	10/11/06 14:30	531.83
SWPW-2	8/28/06 13:35	434.17	SWPW-1	10/11/06 14:35	532.04

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	8/28/06 13:40	434.15	SWPW-1	10/11/06 14:40	531.90
SWPW-2	8/28/06 13:45	434.16	SWPW-1	10/11/06 14:45	532.03
SWPW-2	8/28/06 13:50	434.16	SWPW-1	10/11/06 14:50	531.91
SWPW-2	8/28/06 13:55	434.15	SWPW-1	10/11/06 14:55	532.00
SWPW-2	8/28/06 14:00	434.15	SWPW-1	10/11/06 15:00	532.11
SWPW-2	8/28/06 14:05	434.15	SWPW-1	10/11/06 15:05	531.74
SWPW-2	8/28/06 14:10	434.16	SWPW-1	10/11/06 15:10	531.98
SWPW-2	8/28/06 14:15	434.15	SWPW-1	10/11/06 15:15	532.21
SWPW-2	8/28/06 14:20	434.12	SWPW-1	10/11/06 15:20	531.93
SWPW-2	8/28/06 14:25	434.15	SWPW-1	10/11/06 15:25	532.20
SWPW-2	8/28/06 14:30	434.14	SWPW-1	10/11/06 15:30	531.98
SWPW-2	8/28/06 14:35	434.14	SWPW-1	10/11/06 15:35	532.01
SWPW-2	8/28/06 14:40	434.15	SWPW-1	10/11/06 15:40	531.90
SWPW-2	8/28/06 14:45	434.14	SWPW-1	10/11/06 15:45	532.11
SWPW-2	8/28/06 14:50	434.15	SWPW-1	10/11/06 15:50	531.90
SWPW-2	8/28/06 14:55	434.15	SWPW-1	10/11/06 15:55	531.93
SWPW-2	8/28/06 15:00	434.12	SWPW-1	10/11/06 16:00	532.40
SWPW-2	8/28/06 15:05	434.14	SWPW-1	10/11/06 16:05	532.16
SWPW-2	8/28/06 15:10	434.15	SWPW-1	10/11/06 16:10	532.04
SWPW-2	8/28/06 15:15	434.15	SWPW-1	10/11/06 16:15	532.20
SWPW-2	8/28/06 15:20	434.14	SWPW-1	10/11/06 16:20	532.12
SWPW-2	8/28/06 15:25	434.14	SWPW-1	10/11/06 16:25	532.07
SWPW-2	8/28/06 15:30	434.14	SWPW-1	10/11/06 16:30	531.99
SWPW-2	8/28/06 15:35	434.15	SWPW-1	10/11/06 16:35	532.02
SWPW-2	8/28/06 15:40	434.12	SWPW-1	10/11/06 16:40	532.02
SWPW-2	8/28/06 15:45	434.15	SWPW-1	10/11/06 16:45	532.29
SWPW-2	8/28/06 15:50	434.11	SWPW-1	10/11/06 16:50	532.22
SWPW-2	8/28/06 15:55	434.14	SWPW-1	10/11/06 16:55	532.24
SWPW-2	8/28/06 16:00	434.14	SWPW-1	10/11/06 17:00	532.30
SWPW-2	8/28/06 16:05	434.14	SWPW-1	10/11/06 17:05	532.20
SWPW-2	8/28/06 16:10	434.14	SWPW-1	10/11/06 17:10	532.23
SWPW-2	8/28/06 16:15	434.14	SWPW-1	10/11/06 17:15	532.00
SWPW-2	8/28/06 16:20	434.10	SWPW-1	10/11/06 17:20	532.25
SWPW-2	8/28/06 16:25	434.12	SWPW-1	10/11/06 17:25	532.06
SWPW-2	8/28/06 16:30	434.14	SWPW-1	10/11/06 17:30	532.10
SWPW-2	8/28/06 16:35	434.10	SWPW-1	10/11/06 17:35	532.14
SWPW-2	8/28/06 16:40	434.10	SWPW-1	10/11/06 17:40	532.29
SWPW-2	8/28/06 16:45	434.14	SWPW-1	10/11/06 17:45	532.35
SWPW-2	8/28/06 16:50	434.13	SWPW-1	10/11/06 17:50	531.91
SWPW-2	8/28/06 16:55	434.12	SWPW-1	10/11/06 17:55	532.06
SWPW-2	8/28/06 17:00	434.13	SWPW-1	10/11/06 18:00	532.27
SWPW-2	8/28/06 17:05	434.10	SWPW-1	10/11/06 18:05	532.16
SWPW-2	8/28/06 17:10	434.08	SWPW-1	10/11/06 18:10	531.83
SWPW-2	8/28/06 17:15	434.12	SWPW-1	10/11/06 18:15	532.07
SWPW-2	8/28/06 17:20	434.12	SWPW-1	10/11/06 18:20	532.07
SWPW-2	8/28/06 17:25	434.10	SWPW-1	10/11/06 18:25	531.97
SWPW-2	8/28/06 17:30	434.11	SWPW-1	10/11/06 18:30	532.22
SWPW-2	8/28/06 17:35	434.11	SWPW-1	10/11/06 18:35	532.09
SWPW-2	8/28/06 17:40	434.11	SWPW-1	10/11/06 18:40	532.02
SWPW-2	8/28/06 17:45	434.12	SWPW-1	10/11/06 18:45	531.81
SWPW-2	8/28/06 17:50	434.11	SWPW-1	10/11/06 18:50	531.99
SWPW-2	8/28/06 17:55	434.10	SWPW-1	10/11/06 18:55	532.16
SWPW-2	8/28/06 18:00	434.10	SWPW-1	10/11/06 19:00	532.09
SWPW-2	8/28/06 18:05	434.11	SWPW-1	10/11/06 19:05	531.85
SWPW-2	8/28/06 18:10	434.11	SWPW-1	10/11/06 19:10	531.93
SWPW-2	8/28/06 18:15	434.12	SWPW-1	10/11/06 19:15	531.94
SWPW-2	8/28/06 18:20	434.11	SWPW-1	10/11/06 19:20	531.87
SWPW-2	8/28/06 18:25	434.10	SWPW-1	10/11/06 19:25	532.00
SWPW-2	8/28/06 18:30	434.10	SWPW-1	10/11/06 19:30	531.93
SWPW-2	8/28/06 18:35	434.11	SWPW-1	10/11/06 19:35	532.05
SWPW-2	8/28/06 18:40	434.10	SWPW-1	10/11/06 19:40	532.33
SWPW-2	8/28/06 18:45	434.09	SWPW-1	10/11/06 19:45	532.19
SWPW-2	8/28/06 18:50	434.10	SWPW-1	10/11/06 19:50	532.03
SWPW-2	8/28/06 18:55	434.11	SWPW-1	10/11/06 19:55	532.12
SWPW-2	8/28/06 19:00	434.07	SWPW-1	10/11/06 20:00	532.06
SWPW-2	8/28/06 19:05	434.12	SWPW-1	10/11/06 20:05	532.28
SWPW-2	8/28/06 19:10	434.09	SWPW-1	10/11/06 20:10	532.24
SWPW-2	8/28/06 19:15	434.09	SWPW-1	10/11/06 20:15	532.46
SWPW-2	8/28/06 19:20	434.09	SWPW-1	10/11/06 20:20	532.25
SWPW-2	8/28/06 19:25	434.08	SWPW-1	10/11/06 20:25	532.11
SWPW-2	8/28/06 19:30	434.09	SWPW-1	10/11/06 20:30	532.52
SWPW-2	8/28/06 19:35	434.09	SWPW-1	10/11/06 20:35	532.61
SWPW-2	8/28/06 19:40	434.09	SWPW-1	10/11/06 20:40	532.33
SWPW-2	8/28/06 19:45	434.09	SWPW-1	10/11/06 20:45	532.34
SWPW-2	8/28/06 19:50	434.09	SWPW-1	10/11/06 20:50	532.50
SWPW-2	8/28/06 19:55	434.08	SWPW-1	10/11/06 20:55	532.34
SWPW-2	8/28/06 20:00	434.08	SWPW-1	10/11/06 21:00	532.13
SWPW-2	8/28/06 20:05	434.07	SWPW-1	10/11/06 21:05	532.43
SWPW-2	8/28/06 20:10	434.08	SWPW-1	10/11/06 21:10	532.14
SWPW-2	8/28/06 20:15	434.09	SWPW-1	10/11/06 21:15	532.32
SWPW-2	8/28/06 20:20	434.09	SWPW-1	10/11/06 21:20	532.53
SWPW-2	8/28/06 20:25	434.08	SWPW-1	10/11/06 21:25	532.61
SWPW-2	8/28/06 20:30	434.08	SWPW-1	10/11/06 21:30	532.35
SWPW-2	8/28/06 20:35	434.07	SWPW-1	10/11/06 21:35	532.61
SWPW-2	8/28/06 20:40	434.09	SWPW-1	10/11/06 21:40	532.39
SWPW-2	8/28/06 20:45	434.09	SWPW-1	10/11/06 21:45	532.22
SWPW-2	8/28/06 20:50	434.09	SWPW-1	10/11/06 21:50	532.37
SWPW-2	8/28/06 20:55	434.09	SWPW-1	10/11/06 21:55	532.35
SWPW-2	8/28/06 21:00	434.10	SWPW-1	10/11/06 22:00	532.55
SWPW-2	8/28/06 21:05	434.08	SWPW-1	10/11/06 22:05	532.34
SWPW-2	8/28/06 21:10	434.09	SWPW-1	10/11/06 22:10	532.41
SWPW-2	8/28/06 21:15	434.09	SWPW-1	10/11/06 22:15	532.31
SWPW-2	8/28/06 21:20	434.09	SWPW-1	10/11/06 22:20	532.29
SWPW-2	8/28/06 21:25	434.09	SWPW-1	10/11/06 22:25	532.25
SWPW-2	8/28/06 21:30	434.10	SWPW-1	10/11/06 22:30	532.32
SWPW-2	8/28/06 21:35	434.09	SWPW-1	10/11/06 22:35	532.39
SWPW-2	8/28/06 21:40	434.09	SWPW-1	10/11/06 22:40	532.15
SWPW-2	8/28/06 21:45	434.08	SWPW-1	10/11/06 22:45	532.52
SWPW-2	8/28/06 21:50	434.08	SWPW-1	10/11/06 22:50	532.38
SWPW-2	8/28/06 21:55	434.09	SWPW-1	10/11/06 22:55	532.37

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	8/28/06 22:00	434.10	SWPW-1	10/11/06 23:00	532.31
SWPW-2	8/28/06 22:05	434.09	SWPW-1	10/11/06 23:05	532.25
SWPW-2	8/28/06 22:10	434.08	SWPW-1	10/11/06 23:10	532.24
SWPW-2	8/28/06 22:15	434.10	SWPW-1	10/11/06 23:15	532.34
SWPW-2	8/28/06 22:20	434.09	SWPW-1	10/11/06 23:20	532.46
SWPW-2	8/28/06 22:25	434.10	SWPW-1	10/11/06 23:25	532.40
SWPW-2	8/28/06 22:30	434.10	SWPW-1	10/11/06 23:30	532.40
SWPW-2	8/28/06 22:35	434.10	SWPW-1	10/11/06 23:35	532.54
SWPW-2	8/28/06 22:40	434.10	SWPW-1	10/11/06 23:40	532.42
SWPW-2	8/28/06 22:45	434.09	SWPW-1	10/11/06 23:45	532.52
SWPW-2	8/28/06 22:50	434.08	SWPW-1	10/11/06 23:50	532.75
SWPW-2	8/28/06 22:55	434.09	SWPW-1	10/11/06 23:55	532.49
SWPW-2	8/28/06 23:00	434.09	SWPW-1	10/12/06 0:00	532.38
SWPW-2	8/28/06 23:05	434.08	SWPW-1	10/12/06 0:05	532.29
SWPW-2	8/28/06 23:10	434.08	SWPW-1	10/12/06 0:10	532.30
SWPW-2	8/28/06 23:15	434.11	SWPW-1	10/12/06 0:15	532.28
SWPW-2	8/28/06 23:20	434.12	SWPW-1	10/12/06 0:20	532.67
SWPW-2	8/28/06 23:25	434.11	SWPW-1	10/12/06 0:25	532.69
SWPW-2	8/28/06 23:30	434.08	SWPW-1	10/12/06 0:30	532.55
SWPW-2	8/28/06 23:35	434.09	SWPW-1	10/12/06 0:35	532.53
SWPW-2	8/28/06 23:40	434.09	SWPW-1	10/12/06 0:40	532.44
SWPW-2	8/28/06 23:45	434.08	SWPW-1	10/12/06 0:45	532.36
SWPW-2	8/28/06 23:50	434.08	SWPW-1	10/12/06 0:50	532.15
SWPW-2	8/28/06 23:55	434.08	SWPW-1	10/12/06 0:55	532.36
SWPW-2	8/29/06 0:00	434.09	SWPW-1	10/12/06 1:00	532.55
SWPW-2	8/29/06 0:05	434.08	SWPW-1	10/12/06 1:05	532.45
SWPW-2	8/29/06 0:10	434.09	SWPW-1	10/12/06 1:10	532.26
SWPW-2	8/29/06 0:15	434.09	SWPW-1	10/12/06 1:15	532.34
SWPW-2	8/29/06 0:20	434.09	SWPW-1	10/12/06 1:20	532.43
SWPW-2	8/29/06 0:25	434.08	SWPW-1	10/12/06 1:25	532.24
SWPW-2	8/29/06 0:30	434.09	SWPW-1	10/12/06 1:30	532.46
SWPW-2	8/29/06 0:35	434.09	SWPW-1	10/12/06 1:35	532.32
SWPW-2	8/29/06 0:40	434.08	SWPW-1	10/12/06 1:40	532.40
SWPW-2	8/29/06 0:45	434.08	SWPW-1	10/12/06 1:45	532.21
SWPW-2	8/29/06 0:50	434.10	SWPW-1	10/12/06 1:50	532.24
SWPW-2	8/29/06 0:55	434.07	SWPW-1	10/12/06 1:55	532.41
SWPW-2	8/29/06 1:00	434.08	SWPW-1	10/12/06 2:00	532.49
SWPW-2	8/29/06 1:05	434.08	SWPW-1	10/12/06 2:05	531.88
SWPW-2	8/29/06 1:10	434.08	SWPW-1	10/12/06 2:10	532.14
SWPW-2	8/29/06 1:15	434.08	SWPW-1	10/12/06 2:15	532.27
SWPW-2	8/29/06 1:20	434.09	SWPW-1	10/12/06 2:20	531.99
SWPW-2	8/29/06 1:25	434.11	SWPW-1	10/12/06 2:25	532.38
SWPW-2	8/29/06 1:30	434.08	SWPW-1	10/12/06 2:30	532.27
SWPW-2	8/29/06 1:35	434.08	SWPW-1	10/12/06 2:35	532.32
SWPW-2	8/29/06 1:40	434.08	SWPW-1	10/12/06 2:40	532.06
SWPW-2	8/29/06 1:45	434.09	SWPW-1	10/12/06 2:45	531.94
SWPW-2	8/29/06 1:50	434.09	SWPW-1	10/12/06 2:50	532.34
SWPW-2	8/29/06 1:55	434.09	SWPW-1	10/12/06 2:55	532.38
SWPW-2	8/29/06 2:00	434.09	SWPW-1	10/12/06 3:00	532.26
SWPW-2	8/29/06 2:05	434.08	SWPW-1	10/12/06 3:05	532.27
SWPW-2	8/29/06 2:10	434.08	SWPW-1	10/12/06 3:10	532.21
SWPW-2	8/29/06 2:15	434.08	SWPW-1	10/12/06 3:15	532.69
SWPW-2	8/29/06 2:20	434.07	SWPW-1	10/12/06 3:20	532.19
SWPW-2	8/29/06 2:25	434.07	SWPW-1	10/12/06 3:25	532.31
SWPW-2	8/29/06 2:30	434.08	SWPW-1	10/12/06 3:30	532.13
SWPW-2	8/29/06 2:35	434.08	SWPW-1	10/12/06 3:35	532.23
SWPW-2	8/29/06 2:40	434.08	SWPW-1	10/12/06 3:40	532.25
SWPW-2	8/29/06 2:45	434.07	SWPW-1	10/12/06 3:45	531.97
SWPW-2	8/29/06 2:50	434.08	SWPW-1	10/12/06 3:50	532.36
SWPW-2	8/29/06 2:55	434.08	SWPW-1	10/12/06 3:55	532.23
SWPW-2	8/29/06 3:00	434.08	SWPW-1	10/12/06 4:00	532.37
SWPW-2	8/29/06 3:05	434.09	SWPW-1	10/12/06 4:05	532.11
SWPW-2	8/29/06 3:10	434.09	SWPW-1	10/12/06 4:10	532.05
SWPW-2	8/29/06 3:15	434.08	SWPW-1	10/12/06 4:15	531.97
SWPW-2	8/29/06 3:20	434.08	SWPW-1	10/12/06 4:20	532.21
SWPW-2	8/29/06 3:25	434.09	SWPW-1	10/12/06 4:25	532.37
SWPW-2	8/29/06 3:30	434.07	SWPW-1	10/12/06 4:30	532.22
SWPW-2	8/29/06 3:35	434.05	SWPW-1	10/12/06 4:35	532.34
SWPW-2	8/29/06 3:40	434.08	SWPW-1	10/12/06 4:40	532.25
SWPW-2	8/29/06 3:45	434.08	SWPW-1	10/12/06 4:45	532.12
SWPW-2	8/29/06 3:50	434.08	SWPW-1	10/12/06 4:50	532.18
SWPW-2	8/29/06 3:55	434.08	SWPW-1	10/12/06 4:55	532.28
SWPW-2	8/29/06 4:00	434.08	SWPW-1	10/12/06 5:00	532.50
SWPW-2	8/29/06 4:05	434.08	SWPW-1	10/12/06 5:05	532.09
SWPW-2	8/29/06 4:10	434.07	SWPW-1	10/12/06 5:10	532.43
SWPW-2	8/29/06 4:15	434.05	SWPW-1	10/12/06 5:15	532.52
SWPW-2	8/29/06 4:20	434.07	SWPW-1	10/12/06 5:20	532.49
SWPW-2	8/29/06 4:25	434.05	SWPW-1	10/12/06 5:25	532.48
SWPW-2	8/29/06 4:30	434.08	SWPW-1	10/12/06 5:30	532.25
SWPW-2	8/29/06 4:35	434.07	SWPW-1	10/12/06 5:35	532.20
SWPW-2	8/29/06 4:40	434.09	SWPW-1	10/12/06 5:40	532.43
SWPW-2	8/29/06 4:45	434.05	SWPW-1	10/12/06 5:45	532.56
SWPW-2	8/29/06 4:50	434.03	SWPW-1	10/12/06 5:50	532.52
SWPW-2	8/29/06 4:55	434.08	SWPW-1	10/12/06 5:55	532.61
SWPW-2	8/29/06 5:00	434.06	SWPW-1	10/12/06 6:00	532.18
SWPW-2	8/29/06 5:05	434.06	SWPW-1	10/12/06 6:05	532.38
SWPW-2	8/29/06 5:10	434.08	SWPW-1	10/12/06 6:10	532.37
SWPW-2	8/29/06 5:15	434.08	SWPW-1	10/12/06 6:15	532.54
SWPW-2	8/29/06 5:20	434.06	SWPW-1	10/12/06 6:20	532.40
SWPW-2	8/29/06 5:25	434.02	SWPW-1	10/12/06 6:25	532.14
SWPW-2	8/29/06 5:30	434.02	SWPW-1	10/12/06 6:30	532.45
SWPW-2	8/29/06 5:35	434.03	SWPW-1	10/12/06 6:35	532.73
SWPW-2	8/29/06 5:40	434.02	SWPW-1	10/12/06 6:40	532.65
SWPW-2	8/29/06 5:45	434.01	SWPW-1	10/12/06 6:45	532.39
SWPW-2	8/29/06 5:50	434.05	SWPW-1	10/12/06 6:50	532.46
SWPW-2	8/29/06 5:55	434.01	SWPW-1	10/12/06 6:55	532.40
SWPW-2	8/29/06 6:00	434.04	SWPW-1	10/12/06 7:00	532.13
SWPW-2	8/29/06 6:05	434.01	SWPW-1	10/12/06 7:05	532.30
SWPW-2	8/29/06 6:10	434.01	SWPW-1	10/12/06 7:10	532.25
SWPW-2	8/29/06 6:15	434.06	SWPW-1	10/12/06 7:15	532.54

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	8/29/06 6:20	434.02	SWPW-1	10/12/06 7:20	532.45
SWPW-2	8/29/06 6:25	434.06	SWPW-1	10/12/06 7:25	532.09
SWPW-2	8/29/06 6:30	434.06	SWPW-1	10/12/06 7:30	532.32
SWPW-2	8/29/06 6:35	434.02	SWPW-1	10/12/06 7:35	532.44
SWPW-2	8/29/06 6:40	434.03	SWPW-1	10/12/06 7:40	532.35
SWPW-2	8/29/06 6:45	434.01	SWPW-1	10/12/06 7:45	532.39
SWPW-2	8/29/06 6:50	434.01	SWPW-1	10/12/06 7:50	532.43
SWPW-2	8/29/06 6:55	434.03	SWPW-1	10/12/06 7:55	532.38
SWPW-2	8/29/06 7:00	434.04	SWPW-1	10/12/06 8:00	532.61
SWPW-2	8/29/06 7:05	434.04	SWPW-1	10/12/06 8:05	532.25
SWPW-2	8/29/06 7:10	434.01	SWPW-1	10/12/06 8:10	532.44
SWPW-2	8/29/06 7:15	434.01	SWPW-1	10/12/06 8:15	532.38
SWPW-2	8/29/06 7:20	434.00	SWPW-1	10/12/06 8:20	532.37
SWPW-2	8/29/06 7:25	434.04	SWPW-1	10/12/06 8:25	532.54
SWPW-2	8/29/06 7:30	434.03	SWPW-1	10/12/06 8:30	532.12
SWPW-2	8/29/06 7:35	434.02	SWPW-1	10/12/06 8:35	532.42
SWPW-2	8/29/06 7:40	434.03	SWPW-1	10/12/06 8:40	532.54
SWPW-2	8/29/06 7:45	433.99	SWPW-1	10/12/06 8:45	532.41
SWPW-2	8/29/06 7:50	434.04	SWPW-1	10/12/06 8:50	532.46
SWPW-2	8/29/06 7:55	434.04	SWPW-1	10/12/06 8:55	532.48
SWPW-2	8/29/06 8:00	434.01	SWPW-1	10/12/06 9:00	532.75
SWPW-2	8/29/06 8:05	434.00	SWPW-1	10/12/06 9:05	532.35
SWPW-2	8/29/06 8:10	433.99	SWPW-1	10/12/06 9:10	532.48
SWPW-2	8/29/06 8:15	434.02	SWPW-1	10/12/06 9:15	532.49
SWPW-2	8/29/06 8:20	433.99	SWPW-1	10/12/06 9:20	532.27
SWPW-2	8/29/06 8:25	434.03	SWPW-1	10/12/06 9:25	532.62
SWPW-2	8/29/06 8:30	434.03	SWPW-1	10/12/06 9:30	532.35
SWPW-2	8/29/06 8:35	434.01	SWPW-1	10/12/06 9:35	532.31
SWPW-2	8/29/06 8:40	434.02	SWPW-1	10/12/06 9:40	532.32
SWPW-2	8/29/06 8:45	434.01	SWPW-1	10/12/06 9:45	532.14
SWPW-2	8/29/06 8:50	434.03	SWPW-1	10/12/06 9:50	532.15
SWPW-2	8/29/06 8:55	434.01	SWPW-1	10/12/06 9:55	532.43
SWPW-2	8/29/06 9:00	434.00	SWPW-1	10/12/06 10:00	532.44
SWPW-2	8/29/06 9:05	434.01	SWPW-1	10/12/06 10:05	532.12
SWPW-2	8/29/06 9:10	434.00	SWPW-1	10/12/06 10:10	532.62
SWPW-2	8/29/06 9:15	434.01	SWPW-1	10/12/06 10:15	532.33
SWPW-2	8/29/06 9:20	434.01	SWPW-1	10/12/06 10:20	532.48
SWPW-2	8/29/06 9:25	434.01	SWPW-1	10/12/06 10:25	532.35
SWPW-2	8/29/06 9:30	434.01	SWPW-1	10/12/06 10:30	532.54
SWPW-2	8/29/06 9:35	434.01	SWPW-1	10/12/06 10:35	532.46
SWPW-2	8/29/06 9:40	434.00	SWPW-1	10/12/06 10:40	532.41
SWPW-2	8/29/06 9:45	434.01	SWPW-1	10/12/06 10:45	532.30
SWPW-2	8/29/06 9:50	434.01	SWPW-1	10/12/06 10:50	532.25
SWPW-2	8/29/06 9:55	434.00	SWPW-1	10/12/06 10:55	532.10
SWPW-2	8/29/06 10:00	434.01	SWPW-1	10/12/06 11:00	532.31
SWPW-2	8/29/06 10:05	433.99	SWPW-1	10/12/06 11:05	532.05
SWPW-2	8/29/06 10:10	433.99	SWPW-1	10/12/06 11:10	532.11
SWPW-2	8/29/06 10:15	434.02	SWPW-1	10/12/06 11:15	532.43
SWPW-2	8/29/06 10:20	433.98	SWPW-1	10/12/06 11:20	532.12
SWPW-2	8/29/06 10:25	433.99	SWPW-1	10/12/06 11:25	532.48
SWPW-2	8/29/06 10:30	433.98	SWPW-1	10/12/06 11:30	532.23
SWPW-2	8/29/06 10:35	433.97	SWPW-1	10/12/06 11:35	532.00
SWPW-2	8/29/06 10:40	433.98	SWPW-1	10/12/06 11:40	532.06
SWPW-2	8/29/06 10:45	434.03	SWPW-1	10/12/06 11:45	532.16
SWPW-2	8/29/06 10:50	434.02	SWPW-1	10/12/06 11:50	532.31
SWPW-2	8/29/06 10:55	433.99	SWPW-1	10/12/06 11:55	532.19
SWPW-2	8/29/06 11:00	433.99	SWPW-1	10/12/06 12:00	532.18
SWPW-2	8/29/06 11:05	433.98	SWPW-1	10/12/06 12:05	532.09
SWPW-2	8/29/06 11:10	434.03	SWPW-1	10/12/06 12:10	532.02
SWPW-2	8/29/06 11:15	433.99	SWPW-1	10/12/06 12:15	531.93
SWPW-2	8/29/06 11:20	433.99	SWPW-1	10/12/06 12:20	532.24
SWPW-2	8/29/06 11:25	433.99	SWPW-1	10/12/06 12:25	532.21
SWPW-2	8/29/06 11:30	433.99	SWPW-1	10/12/06 12:30	531.88
SWPW-2	8/29/06 11:35	433.99	SWPW-1	10/12/06 12:35	531.91
SWPW-2	8/29/06 11:40	433.98	SWPW-1	10/12/06 12:40	531.93
SWPW-2	8/29/06 11:45	433.99	SWPW-1	10/12/06 12:45	532.25
SWPW-2	8/29/06 11:50	433.98	SWPW-1	10/12/06 12:50	531.78
SWPW-2	8/29/06 11:55	433.98	SWPW-1	10/12/06 12:55	531.96
SWPW-2	8/29/06 12:00	433.98	SWPW-1	10/12/06 13:00	532.04
SWPW-2	8/29/06 12:05	433.99	SWPW-1	10/12/06 13:05	531.95
SWPW-2	8/29/06 12:10	434.00	SWPW-1	10/12/06 13:10	532.25
SWPW-2	8/29/06 12:15	434.00	SWPW-1	10/12/06 13:15	532.10
SWPW-2	8/29/06 12:20	433.99	SWPW-1	10/12/06 13:20	532.21
SWPW-2	8/29/06 12:25	433.98	SWPW-1	10/12/06 13:25	531.86
SWPW-2	8/29/06 12:30	433.97	SWPW-1	10/12/06 13:30	532.08
SWPW-2	8/29/06 12:35	433.97	SWPW-1	10/12/06 13:35	531.92
SWPW-2	8/29/06 12:40	433.98	SWPW-1	10/12/06 13:40	531.96
SWPW-2	8/29/06 12:45	433.99	SWPW-1	10/12/06 13:45	531.84
SWPW-2	8/29/06 12:50	433.98	SWPW-1	10/12/06 13:50	532.23
SWPW-2	8/29/06 12:55	433.98	SWPW-1	10/12/06 13:55	532.32
SWPW-2	8/29/06 13:00	433.99	SWPW-1	10/12/06 14:00	532.20
SWPW-2	8/29/06 13:05	433.97	SWPW-1	10/12/06 14:05	532.22
SWPW-2	8/29/06 13:10	433.98	SWPW-1	10/12/06 14:10	532.27
SWPW-2	8/29/06 13:15	433.98	SWPW-1	10/12/06 14:15	532.12
SWPW-2	8/29/06 13:20	433.98	SWPW-1	10/12/06 14:20	532.12
SWPW-2	8/29/06 13:25	433.98	SWPW-1	10/12/06 14:25	532.09
SWPW-2	8/29/06 13:30	433.98	SWPW-1	10/12/06 14:30	531.89
SWPW-2	8/29/06 13:35	433.97	SWPW-1	10/12/06 14:35	531.91
SWPW-2	8/29/06 13:40	433.98	SWPW-1	10/12/06 14:40	531.90
SWPW-2	8/29/06 13:45	433.97	SWPW-1	10/12/06 14:45	531.89
SWPW-2	8/29/06 13:50	433.98	SWPW-1	10/12/06 14:50	531.89
SWPW-2	8/29/06 13:55	433.97	SWPW-1	10/12/06 14:55	532.12
SWPW-2	8/29/06 14:00	433.97	SWPW-1	10/12/06 15:00	532.15
SWPW-2	8/29/06 14:05	433.99	SWPW-1	10/12/06 15:05	532.08
SWPW-2	8/29/06 14:10	433.97	SWPW-1	10/12/06 15:10	531.90
SWPW-2	8/29/06 14:15	433.93	SWPW-1	10/12/06 15:15	532.15
SWPW-2	8/29/06 14:20	433.96	SWPW-1	10/12/06 15:20	532.27
SWPW-2	8/29/06 14:25	433.96	SWPW-1	10/12/06 15:25	532.08
SWPW-2	8/29/06 14:30	433.96	SWPW-1	10/12/06 15:30	531.90
SWPW-2	8/29/06 14:35	433.97	SWPW-1	10/12/06 15:35	532.18

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	8/29/06 14:40	433.96	SWPW-1	10/12/06 15:40	532.10
SWPW-2	8/29/06 14:45	433.97	SWPW-1	10/12/06 15:45	532.10
SWPW-2	8/29/06 14:50	433.97	SWPW-1	10/12/06 15:50	532.19
SWPW-2	8/29/06 14:55	433.96	SWPW-1	10/12/06 15:55	532.19
SWPW-2	8/29/06 15:00	433.97	SWPW-1	10/12/06 16:00	532.45
SWPW-2	8/29/06 15:05	433.96	SWPW-1	10/12/06 16:05	532.38
SWPW-2	8/29/06 15:10	433.97	SWPW-1	10/12/06 16:10	532.28
SWPW-2	8/29/06 15:15	433.96	SWPW-1	10/12/06 16:15	532.33
SWPW-2	8/29/06 15:20	433.96	SWPW-1	10/12/06 16:20	532.41
SWPW-2	8/29/06 15:25	433.95	SWPW-1	10/12/06 16:25	532.13
SWPW-2	8/29/06 15:30	433.94	SWPW-1	10/12/06 16:30	532.30
SWPW-2	8/29/06 15:35	433.94	SWPW-1	10/12/06 16:35	532.07
SWPW-2	8/29/06 15:40	433.95	SWPW-1	10/12/06 16:40	532.31
SWPW-2	8/29/06 15:45	433.96	SWPW-1	10/12/06 16:45	532.28
SWPW-2	8/29/06 15:50	433.94	SWPW-1	10/12/06 16:50	532.44
SWPW-2	8/29/06 15:55	433.93	SWPW-1	10/12/06 16:55	532.02
SWPW-2	8/29/06 16:00	433.95	SWPW-1	10/12/06 17:00	532.02
SWPW-2	8/29/06 16:05	433.96	SWPW-1	10/12/06 17:05	532.33
SWPW-2	8/29/06 16:10	433.94	SWPW-1	10/12/06 17:10	532.30
SWPW-2	8/29/06 16:15	433.97	SWPW-1	10/12/06 17:15	532.25
SWPW-2	8/29/06 16:20	433.94	SWPW-1	10/12/06 17:20	532.25
SWPW-2	8/29/06 16:25	433.96	SWPW-1	10/12/06 17:25	532.37
SWPW-2	8/29/06 16:30	433.94	SWPW-1	10/12/06 17:30	532.20
SWPW-2	8/29/06 16:35	433.94	SWPW-1	10/12/06 17:35	532.41
SWPW-2	8/29/06 16:40	433.94	SWPW-1	10/12/06 17:40	532.15
SWPW-2	8/29/06 16:45	433.95	SWPW-1	10/12/06 17:45	532.17
SWPW-2	8/29/06 16:50	433.94	SWPW-1	10/12/06 17:50	532.25
SWPW-2	8/29/06 16:55	433.95	SWPW-1	10/12/06 17:55	531.92
SWPW-2	8/29/06 17:00	433.89	SWPW-1	10/12/06 18:00	532.24
SWPW-2	8/29/06 17:05	433.94	SWPW-1	10/12/06 18:05	532.21
SWPW-2	8/29/06 17:10	433.94	SWPW-1	10/12/06 18:10	532.26
SWPW-2	8/29/06 17:15	433.93	SWPW-1	10/12/06 18:15	531.96
SWPW-2	8/29/06 17:20	433.92	SWPW-1	10/12/06 18:20	532.10
SWPW-2	8/29/06 17:25	433.93	SWPW-1	10/12/06 18:25	532.19
SWPW-2	8/29/06 17:30	433.96	SWPW-1	10/12/06 18:30	532.17
SWPW-2	8/29/06 17:35	433.91	SWPW-1	10/12/06 18:35	532.29
SWPW-2	8/29/06 17:40	433.92	SWPW-1	10/12/06 18:40	532.25
SWPW-2	8/29/06 17:45	433.92	SWPW-1	10/12/06 18:45	532.25
SWPW-2	8/29/06 17:50	433.91	SWPW-1	10/12/06 18:50	532.42
SWPW-2	8/29/06 17:55	433.91	SWPW-1	10/12/06 18:55	532.14
SWPW-2	8/29/06 18:00	433.91	SWPW-1	10/12/06 19:00	532.13
SWPW-2	8/29/06 18:05	433.91	SWPW-1	10/12/06 19:05	532.38
SWPW-2	8/29/06 18:10	433.93	SWPW-1	10/12/06 19:10	532.34
SWPW-2	8/29/06 18:15	433.91	SWPW-1	10/12/06 19:15	532.20
SWPW-2	8/29/06 18:20	433.92	SWPW-1	10/12/06 19:20	532.45
SWPW-2	8/29/06 18:25	433.92	SWPW-1	10/12/06 19:25	532.16
SWPW-2	8/29/06 18:30	433.91	SWPW-1	10/12/06 19:30	532.41
SWPW-2	8/29/06 18:35	433.91	SWPW-1	10/12/06 19:35	532.20
SWPW-2	8/29/06 18:40	433.92	SWPW-1	10/12/06 19:40	532.21
SWPW-2	8/29/06 18:45	433.91	SWPW-1	10/12/06 19:45	532.53
SWPW-2	8/29/06 18:50	433.91	SWPW-1	10/12/06 19:50	532.32
SWPW-2	8/29/06 18:55	433.91	SWPW-1	10/12/06 19:55	532.25
SWPW-2	8/29/06 19:00	433.91	SWPW-1	10/12/06 20:00	532.37
SWPW-2	8/29/06 19:05	433.90	SWPW-1	10/12/06 20:05	532.20
SWPW-2	8/29/06 19:10	433.91	SWPW-1	10/12/06 20:10	532.31
SWPW-2	8/29/06 19:15	433.90	SWPW-1	10/12/06 20:15	532.33
SWPW-2	8/29/06 19:20	433.91	SWPW-1	10/12/06 20:20	532.03
SWPW-2	8/29/06 19:25	433.90	SWPW-1	10/12/06 20:25	532.18
SWPW-2	8/29/06 19:30	433.90	SWPW-1	10/12/06 20:30	532.50
SWPW-2	8/29/06 19:35	433.90	SWPW-1	10/12/06 20:35	532.33
SWPW-2	8/29/06 19:40	433.91	SWPW-1	10/12/06 20:40	532.06
SWPW-2	8/29/06 19:45	433.90	SWPW-1	10/12/06 20:45	532.19
SWPW-2	8/29/06 19:50	433.91	SWPW-1	10/12/06 20:50	532.01
SWPW-2	8/29/06 19:55	433.91	SWPW-1	10/12/06 20:55	532.21
SWPW-2	8/29/06 20:00	433.90	SWPW-1	10/12/06 21:00	531.98
SWPW-2	8/29/06 20:05	433.88	SWPW-1	10/12/06 21:05	532.07
SWPW-2	8/29/06 20:10	433.91	SWPW-1	10/12/06 21:10	532.21
SWPW-2	8/29/06 20:15	433.91	SWPW-1	10/12/06 21:15	532.43
SWPW-2	8/29/06 20:20	433.90	SWPW-1	10/12/06 21:20	532.31
SWPW-2	8/29/06 20:25	433.91	SWPW-1	10/12/06 21:25	531.98
SWPW-2	8/29/06 20:30	433.91	SWPW-1	10/12/06 21:30	532.12
SWPW-2	8/29/06 20:35	433.90	SWPW-1	10/12/06 21:35	532.30
SWPW-2	8/29/06 20:40	433.89	SWPW-1	10/12/06 21:40	532.66
SWPW-2	8/29/06 20:45	433.90	SWPW-1	10/12/06 21:45	532.57
SWPW-2	8/29/06 20:50	433.90	SWPW-1	10/12/06 21:50	532.28
SWPW-2	8/29/06 20:55	433.90	SWPW-1	10/12/06 21:55	532.35
SWPW-2	8/29/06 21:00	433.89	SWPW-1	10/12/06 22:00	532.45
SWPW-2	8/29/06 21:05	433.90	SWPW-1	10/12/06 22:05	532.19
SWPW-2	8/29/06 21:10	433.90	SWPW-1	10/12/06 22:10	532.55
SWPW-2	8/29/06 21:15	433.90	SWPW-1	10/12/06 22:15	532.46
SWPW-2	8/29/06 21:20	433.90	SWPW-1	10/12/06 22:20	532.17
SWPW-2	8/29/06 21:25	433.90	SWPW-1	10/12/06 22:25	532.65
SWPW-2	8/29/06 21:30	433.89	SWPW-1	10/12/06 22:30	532.47
SWPW-2	8/29/06 21:35	433.90	SWPW-1	10/12/06 22:35	532.34
SWPW-2	8/29/06 21:40	433.89	SWPW-1	10/12/06 22:40	532.04
SWPW-2	8/29/06 21:45	433.90	SWPW-1	10/12/06 22:45	532.70
SWPW-2	8/29/06 21:50	433.89	SWPW-1	10/12/06 22:50	532.48
SWPW-2	8/29/06 21:55	433.90	SWPW-1	10/12/06 22:55	532.04
SWPW-2	8/29/06 22:00	433.89	SWPW-1	10/12/06 23:00	532.42
SWPW-2	8/29/06 22:05	433.89	SWPW-1	10/12/06 23:05	532.28
SWPW-2	8/29/06 22:10	433.89	SWPW-1	10/12/06 23:10	532.17
SWPW-2	8/29/06 22:15	433.89	SWPW-1	10/12/06 23:15	532.32
SWPW-2	8/29/06 22:20	433.90	SWPW-1	10/12/06 23:20	532.69
SWPW-2	8/29/06 22:25	433.89	SWPW-1	10/12/06 23:25	532.22
SWPW-2	8/29/06 22:30	433.87	SWPW-1	10/12/06 23:30	532.30
SWPW-2	8/29/06 22:35	433.87	SWPW-1	10/12/06 23:35	532.58
SWPW-2	8/29/06 22:40	433.92	SWPW-1	10/12/06 23:40	532.39
SWPW-2	8/29/06 22:45	433.90	SWPW-1	10/12/06 23:45	532.41
SWPW-2	8/29/06 22:50	433.90	SWPW-1	10/12/06 23:50	532.14
SWPW-2	8/29/06 22:55	433.89	SWPW-1	10/12/06 23:55	532.22

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	8/29/06 23:00	433.90	SWPW-1	10/13/06 0:00	532.37
SWPW-2	8/29/06 23:05	433.89	SWPW-1	10/13/06 0:05	532.39
SWPW-2	8/29/06 23:10	433.93	SWPW-1	10/13/06 0:10	532.11
SWPW-2	8/29/06 23:15	433.90	SWPW-1	10/13/06 0:15	532.29
SWPW-2	8/29/06 23:20	433.89	SWPW-1	10/13/06 0:20	532.26
SWPW-2	8/29/06 23:25	433.91	SWPW-1	10/13/06 0:25	532.06
SWPW-2	8/29/06 23:30	433.89	SWPW-1	10/13/06 0:30	532.47
SWPW-2	8/29/06 23:35	433.90	SWPW-1	10/13/06 0:35	532.43
SWPW-2	8/29/06 23:40	433.90	SWPW-1	10/13/06 0:40	532.49
SWPW-2	8/29/06 23:45	433.89	SWPW-1	10/13/06 0:45	532.47
SWPW-2	8/29/06 23:50	433.90	SWPW-1	10/13/06 0:50	532.39
SWPW-2	8/29/06 23:55	433.92	SWPW-1	10/13/06 0:55	532.42
SWPW-2	8/30/06 0:00	433.89	SWPW-1	10/13/06 1:00	532.67
SWPW-2	8/30/06 0:05	433.90	SWPW-1	10/13/06 1:05	532.49
SWPW-2	8/30/06 0:10	433.89	SWPW-1	10/13/06 1:10	532.37
SWPW-2	8/30/06 0:15	433.89	SWPW-1	10/13/06 1:15	532.34
SWPW-2	8/30/06 0:20	433.89	SWPW-1	10/13/06 1:20	532.27
SWPW-2	8/30/06 0:25	433.89	SWPW-1	10/13/06 1:25	532.28
SWPW-2	8/30/06 0:30	433.89	SWPW-1	10/13/06 1:30	532.51
SWPW-2	8/30/06 0:35	433.90	SWPW-1	10/13/06 1:35	532.16
SWPW-2	8/30/06 0:40	433.90	SWPW-1	10/13/06 1:40	532.53
SWPW-2	8/30/06 0:45	433.89	SWPW-1	10/13/06 1:45	532.50
SWPW-2	8/30/06 0:50	433.90	SWPW-1	10/13/06 1:50	532.29
SWPW-2	8/30/06 0:55	433.90	SWPW-1	10/13/06 1:55	532.47
SWPW-2	8/30/06 1:00	433.90	SWPW-1	10/13/06 2:00	532.32
SWPW-2	8/30/06 1:05	433.89	SWPW-1	10/13/06 2:05	532.59
SWPW-2	8/30/06 1:10	433.91	SWPW-1	10/13/06 2:10	532.42
SWPW-2	8/30/06 1:15	433.89	SWPW-1	10/13/06 2:15	532.56
SWPW-2	8/30/06 1:20	433.90	SWPW-1	10/13/06 2:20	532.67
SWPW-2	8/30/06 1:25	433.90	SWPW-1	10/13/06 2:25	532.40
SWPW-2	8/30/06 1:30	433.90	SWPW-1	10/13/06 2:30	532.55
SWPW-2	8/30/06 1:35	433.89	SWPW-1	10/13/06 2:35	532.56
SWPW-2	8/30/06 1:40	433.90	SWPW-1	10/13/06 2:40	532.52
SWPW-2	8/30/06 1:45	433.90	SWPW-1	10/13/06 2:45	532.56
SWPW-2	8/30/06 1:50	433.89	SWPW-1	10/13/06 2:50	532.44
SWPW-2	8/30/06 1:55	433.90	SWPW-1	10/13/06 2:55	532.68
SWPW-2	8/30/06 2:00	433.88	SWPW-1	10/13/06 3:00	532.51
SWPW-2	8/30/06 2:05	433.91	SWPW-1	10/13/06 3:05	532.55
SWPW-2	8/30/06 2:10	433.90	SWPW-1	10/13/06 3:10	532.37
SWPW-2	8/30/06 2:15	433.90	SWPW-1	10/13/06 3:15	532.44
SWPW-2	8/30/06 2:20	433.91	SWPW-1	10/13/06 3:20	532.37
SWPW-2	8/30/06 2:25	433.90	SWPW-1	10/13/06 3:25	532.35
SWPW-2	8/30/06 2:30	433.89	SWPW-1	10/13/06 3:30	532.30
SWPW-2	8/30/06 2:35	433.90	SWPW-1	10/13/06 3:35	532.50
SWPW-2	8/30/06 2:40	433.90	SWPW-1	10/13/06 3:40	532.46
SWPW-2	8/30/06 2:45	433.90	SWPW-1	10/13/06 3:45	532.60
SWPW-2	8/30/06 2:50	433.90	SWPW-1	10/13/06 3:50	532.45
SWPW-2	8/30/06 2:55	433.90	SWPW-1	10/13/06 3:55	532.53
SWPW-2	8/30/06 3:00	433.90	SWPW-1	10/13/06 4:00	532.57
SWPW-2	8/30/06 3:05	433.89	SWPW-1	10/13/06 4:05	532.53
SWPW-2	8/30/06 3:10	433.90	SWPW-1	10/13/06 4:10	532.19
SWPW-2	8/30/06 3:15	433.91	SWPW-1	10/13/06 4:15	532.66
SWPW-2	8/30/06 3:20	433.91	SWPW-1	10/13/06 4:20	532.55
SWPW-2	8/30/06 3:25	433.91	SWPW-1	10/13/06 4:25	532.54
SWPW-2	8/30/06 3:30	433.92	SWPW-1	10/13/06 4:30	532.58
SWPW-2	8/30/06 3:35	433.93	SWPW-1	10/13/06 4:35	532.37
SWPW-2	8/30/06 3:40	433.92	SWPW-1	10/13/06 4:40	532.49
SWPW-2	8/30/06 3:45	433.91	SWPW-1	10/13/06 4:45	532.62
SWPW-2	8/30/06 3:50	433.92	SWPW-1	10/13/06 4:50	532.74
SWPW-2	8/30/06 3:55	433.90	SWPW-1	10/13/06 4:55	532.51
SWPW-2	8/30/06 4:00	433.91	SWPW-1	10/13/06 5:00	532.33
SWPW-2	8/30/06 4:05	433.91	SWPW-1	10/13/06 5:05	532.61
SWPW-2	8/30/06 4:10	433.90	SWPW-1	10/13/06 5:10	532.63
SWPW-2	8/30/06 4:15	433.90	SWPW-1	10/13/06 5:15	532.47
SWPW-2	8/30/06 4:20	433.87	SWPW-1	10/13/06 5:20	532.82
SWPW-2	8/30/06 4:25	433.90	SWPW-1	10/13/06 5:25	532.61
SWPW-2	8/30/06 4:30	433.90	SWPW-1	10/13/06 5:30	532.84
SWPW-2	8/30/06 4:35	433.88	SWPW-1	10/13/06 5:35	532.65
SWPW-2	8/30/06 4:40	433.91	SWPW-1	10/13/06 5:40	532.63
SWPW-2	8/30/06 4:45	433.91	SWPW-1	10/13/06 5:45	532.52
SWPW-2	8/30/06 4:50	433.89	SWPW-1	10/13/06 5:50	532.84
SWPW-2	8/30/06 4:55	433.91	SWPW-1	10/13/06 5:55	532.40
SWPW-2	8/30/06 5:00	433.90	SWPW-1	10/13/06 6:00	532.51
SWPW-2	8/30/06 5:05	433.89	SWPW-1	10/13/06 6:05	532.64
SWPW-2	8/30/06 5:10	433.89	SWPW-1	10/13/06 6:10	532.43
SWPW-2	8/30/06 5:15	433.90	SWPW-1	10/13/06 6:15	532.60
SWPW-2	8/30/06 5:20	433.89	SWPW-1	10/13/06 6:20	532.73
SWPW-2	8/30/06 5:25	433.90	SWPW-1	10/13/06 6:25	532.56
SWPW-2	8/30/06 5:30	433.89	SWPW-1	10/13/06 6:30	532.61
SWPW-2	8/30/06 5:35	433.89	SWPW-1	10/13/06 6:35	532.46
SWPW-2	8/30/06 5:40	433.87	SWPW-1	10/13/06 6:40	532.64
SWPW-2	8/30/06 5:45	433.91	SWPW-1	10/13/06 6:45	532.61
SWPW-2	8/30/06 5:50	433.90	SWPW-1	10/13/06 6:50	532.46
SWPW-2	8/30/06 5:55	433.88	SWPW-1	10/13/06 6:55	532.67
SWPW-2	8/30/06 6:00	433.89	SWPW-1	10/13/06 7:00	532.63
SWPW-2	8/30/06 6:05	433.88	SWPW-1	10/13/06 7:05	532.47
SWPW-2	8/30/06 6:10	433.87	SWPW-1	10/13/06 7:10	532.73
SWPW-2	8/30/06 6:15	433.88	SWPW-1	10/13/06 7:15	532.62
SWPW-2	8/30/06 6:20	433.89	SWPW-1	10/13/06 7:20	532.75
SWPW-2	8/30/06 6:25	433.89	SWPW-1	10/13/06 7:25	532.95
SWPW-2	8/30/06 6:30	433.89	SWPW-1	10/13/06 7:30	532.53
SWPW-2	8/30/06 6:35	433.89	SWPW-1	10/13/06 7:35	532.80
SWPW-2	8/30/06 6:40	433.90	SWPW-1	10/13/06 7:40	532.68
SWPW-2	8/30/06 6:45	433.89	SWPW-1	10/13/06 7:45	532.51
SWPW-2	8/30/06 6:50	433.88	SWPW-1	10/13/06 7:50	532.65
SWPW-2	8/30/06 6:55	433.88	SWPW-1	10/13/06 7:55	532.55
SWPW-2	8/30/06 7:00	433.90	SWPW-1	10/13/06 8:00	532.80
SWPW-2	8/30/06 7:05	433.86	SWPW-1	10/13/06 8:05	532.50
SWPW-2	8/30/06 7:10	433.90	SWPW-1	10/13/06 8:10	532.84
SWPW-2	8/30/06 7:15	433.89	SWPW-1	10/13/06 8:15	532.52

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	8/30/06 7:20	433.88	SWPW-1	10/13/06 8:20	532.91
SWPW-2	8/30/06 7:25	433.88	SWPW-1	10/13/06 8:25	532.81
SWPW-2	8/30/06 7:30	433.87	SWPW-1	10/13/06 8:30	532.64
SWPW-2	8/30/06 7:35	433.89	SWPW-1	10/13/06 8:35	532.63
SWPW-2	8/30/06 7:40	433.88	SWPW-1	10/13/06 8:40	532.68
SWPW-2	8/30/06 7:45	433.89	SWPW-1	10/13/06 8:45	532.69
SWPW-2	8/30/06 7:50	433.89	SWPW-1	10/13/06 8:50	532.68
SWPW-2	8/30/06 7:55	433.87	SWPW-1	10/13/06 8:55	532.81
SWPW-2	8/30/06 8:00	433.88	SWPW-1	10/13/06 9:00	501.83
SWPW-2	8/30/06 8:05	433.89	SWPW-1	10/13/06 9:05	484.14
SWPW-2	8/30/06 8:10	433.88	SWPW-1	10/13/06 9:10	482.04
SWPW-2	8/30/06 8:15	433.88	SWPW-1	10/13/06 9:15	480.93
SWPW-2	8/30/06 8:20	433.88	SWPW-1	10/13/06 9:20	480.17
SWPW-2	8/30/06 8:25	433.88	SWPW-1	10/13/06 9:25	479.61
SWPW-2	8/30/06 8:30	433.89	SWPW-1	10/13/06 9:30	479.09
SWPW-2	8/30/06 8:35	433.88	SWPW-1	10/13/06 9:35	478.69
SWPW-2	8/30/06 8:40	433.85	SWPW-1	10/13/06 9:40	478.36
SWPW-2	8/30/06 8:45	433.88	SWPW-1	10/13/06 9:45	478.06
SWPW-2	8/30/06 8:50	433.89	SWPW-1	10/13/06 9:50	477.76
SWPW-2	8/30/06 8:55	433.89	SWPW-1	10/13/06 9:55	477.50
SWPW-2	8/30/06 9:00	433.88	SWPW-1	10/13/06 10:00	477.26
SWPW-2	8/30/06 9:05	433.89	SWPW-1	10/13/06 10:05	477.07
SWPW-2	8/30/06 9:10	433.84	SWPW-1	10/13/06 10:10	476.87
SWPW-2	8/30/06 9:15	433.88	SWPW-1	10/13/06 10:15	476.67
SWPW-2	8/30/06 9:20	433.88	SWPW-1	10/13/06 10:20	476.53
SWPW-2	8/30/06 9:25	433.88	SWPW-1	10/13/06 10:25	476.36
SWPW-2	8/30/06 9:30	433.84	SWPW-1	10/13/06 10:30	476.22
SWPW-2	8/30/06 9:35	433.90	SWPW-1	10/13/06 10:35	476.07
SWPW-2	8/30/06 9:40	433.88	SWPW-1	10/13/06 10:40	475.93
SWPW-2	8/30/06 9:45	433.89	SWPW-1	10/13/06 10:45	475.79
SWPW-2	8/30/06 9:50	433.88	SWPW-1	10/13/06 10:50	475.68
SWPW-2	8/30/06 9:55	433.88	SWPW-1	10/13/06 10:55	475.57
SWPW-2	8/30/06 10:00	433.87	SWPW-1	10/13/06 11:00	475.45
SWPW-2	8/30/06 10:05	433.87	SWPW-1	10/13/06 11:05	475.34
SWPW-2	8/30/06 10:10	433.87	SWPW-1	10/13/06 11:10	475.25
SWPW-2	8/30/06 10:15	433.86	SWPW-1	10/13/06 11:15	475.15
SWPW-2	8/30/06 10:20	433.86	SWPW-1	10/13/06 11:20	475.05
SWPW-2	8/30/06 10:25	433.87	SWPW-1	10/13/06 11:25	474.96
SWPW-2	8/30/06 10:30	433.87	SWPW-1	10/13/06 11:30	474.86
SWPW-2	8/30/06 10:35	433.87	SWPW-1	10/13/06 11:35	474.79
SWPW-2	8/30/06 10:40	433.87	SWPW-1	10/13/06 11:40	474.72
SWPW-2	8/30/06 10:45	433.87	SWPW-1	10/13/06 11:45	474.61
SWPW-2	8/30/06 10:50	433.87	SWPW-1	10/13/06 11:50	474.54
SWPW-2	8/30/06 10:55	433.87	SWPW-1	10/13/06 11:55	474.46
SWPW-2	8/30/06 11:00	433.86	SWPW-1	10/13/06 12:00	474.42
SWPW-2	8/30/06 11:05	433.87	SWPW-1	10/13/06 12:05	474.34
SWPW-2	8/30/06 11:10	433.86	SWPW-1	10/13/06 12:10	474.25
SWPW-2	8/30/06 11:15	433.87	SWPW-1	10/13/06 12:15	474.18
SWPW-2	8/30/06 11:20	433.87	SWPW-1	10/13/06 12:20	474.14
SWPW-2	8/30/06 11:25	433.84	SWPW-1	10/13/06 12:25	474.07
SWPW-2	8/30/06 11:30	433.87	SWPW-1	10/13/06 12:30	474.00
SWPW-2	8/30/06 11:35	433.87	SWPW-1	10/13/06 12:35	473.94
SWPW-2	8/30/06 11:40	433.87	SWPW-1	10/13/06 12:40	473.87
SWPW-2	8/30/06 11:45	433.86	SWPW-1	10/13/06 12:45	473.85
SWPW-2	8/30/06 11:50	433.86	SWPW-1	10/13/06 12:50	473.76
SWPW-2	8/30/06 11:55	433.87	SWPW-1	10/13/06 12:55	473.74
SWPW-2	8/30/06 12:00	433.84	SWPW-1	10/13/06 13:00	473.67
SWPW-2	8/30/06 12:05	433.87	SWPW-1	10/13/06 13:05	473.61
SWPW-2	8/30/06 12:10	433.87	SWPW-1	10/13/06 13:10	473.55
SWPW-2	8/30/06 12:15	433.87	SWPW-1	10/13/06 13:15	473.51
SWPW-2	8/30/06 12:20	433.87	SWPW-1	10/13/06 13:20	473.45
SWPW-2	8/30/06 12:25	433.87	SWPW-1	10/13/06 13:25	473.39
SWPW-2	8/30/06 12:30	433.87	SWPW-1	10/13/06 13:30	473.35
SWPW-2	8/30/06 12:35	433.86	SWPW-1	10/13/06 13:35	473.31
SWPW-2	8/30/06 12:40	433.86	SWPW-1	10/13/06 13:40	473.27
SWPW-2	8/30/06 12:45	433.86	SWPW-1	10/13/06 13:45	473.22
SWPW-2	8/30/06 12:50	433.83	SWPW-1	10/13/06 13:50	473.17
SWPW-2	8/30/06 12:55	433.85	SWPW-1	10/13/06 13:55	473.12
SWPW-2	8/30/06 13:00	433.85	SWPW-1	10/13/06 14:00	473.08
SWPW-2	8/30/06 13:05	433.85	SWPW-1	10/13/06 14:05	473.04
SWPW-2	8/30/06 13:10	433.85	SWPW-1	10/13/06 14:10	473.00
SWPW-2	8/30/06 13:15	433.85	SWPW-1	10/13/06 14:15	472.96
SWPW-2	8/30/06 13:20	433.83	SWPW-1	10/13/06 14:20	472.90
SWPW-2	8/30/06 13:25	433.84	SWPW-1	10/13/06 14:25	472.87
SWPW-2	8/30/06 13:30	433.84	SWPW-1	10/13/06 14:30	472.82
SWPW-2	8/30/06 13:35	433.85	SWPW-1	10/13/06 14:35	472.81
SWPW-2	8/30/06 13:40	433.85	SWPW-1	10/13/06 14:40	472.77
SWPW-2	8/30/06 13:45	433.83	SWPW-1	10/13/06 14:45	472.73
SWPW-2	8/30/06 13:50	433.82	SWPW-1	10/13/06 14:50	472.68
SWPW-2	8/30/06 13:55	433.84	SWPW-1	10/13/06 14:55	472.64
SWPW-2	8/30/06 14:00	433.86	SWPW-1	10/13/06 15:00	472.60
SWPW-2	8/30/06 14:05	433.85	SWPW-1	10/13/06 15:05	472.57
SWPW-2	8/30/06 14:10	433.81	SWPW-1	10/13/06 15:10	472.54
SWPW-2	8/30/06 14:15	433.84	SWPW-1	10/13/06 15:15	472.50
SWPW-2	8/30/06 14:20	433.84	SWPW-1	10/13/06 15:20	472.46
SWPW-2	8/30/06 14:25	433.84	SWPW-1	10/13/06 15:25	472.42
SWPW-2	8/30/06 14:30	433.84	SWPW-1	10/13/06 15:30	472.43
SWPW-2	8/30/06 14:35	433.83	SWPW-1	10/13/06 15:35	472.38
SWPW-2	8/30/06 14:40	433.84	SWPW-1	10/13/06 15:40	472.31
SWPW-2	8/30/06 14:45	433.85	SWPW-1	10/13/06 15:45	472.31
SWPW-2	8/30/06 14:50	433.85	SWPW-1	10/13/06 15:50	472.28
SWPW-2	8/30/06 14:55	433.81	SWPW-1	10/13/06 15:55	472.25
SWPW-2	8/30/06 15:00	433.81	SWPW-1	10/13/06 16:00	472.22
SWPW-2	8/30/06 15:05	433.84	SWPW-1	10/13/06 16:05	472.19
SWPW-2	8/30/06 15:10	433.81	SWPW-1	10/13/06 16:10	472.18
SWPW-2	8/30/06 15:15	433.81	SWPW-1	10/13/06 16:15	472.13
SWPW-2	8/30/06 15:20	433.79	SWPW-1	10/13/06 16:20	472.08
SWPW-2	8/30/06 15:25	433.84	SWPW-1	10/13/06 16:25	472.09
SWPW-2	8/30/06 15:30	433.81	SWPW-1	10/13/06 16:30	472.04
SWPW-2	8/30/06 15:35	433.84	SWPW-1	10/13/06 16:35	472.00

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	8/30/06 15:40	433.80	SWPW-1	10/13/06 16:40	471.98
SWPW-2	8/30/06 15:45	433.80	SWPW-1	10/13/06 16:45	471.94
SWPW-2	8/30/06 15:50	433.82	SWPW-1	10/13/06 16:50	471.92
SWPW-2	8/30/06 15:55	433.83	SWPW-1	10/13/06 16:55	471.92
SWPW-2	8/30/06 16:00	433.79	SWPW-1	10/13/06 17:00	471.86
SWPW-2	8/30/06 16:05	433.80	SWPW-1	10/13/06 17:05	471.83
SWPW-2	8/30/06 16:10	433.83	SWPW-1	10/13/06 17:10	471.81
SWPW-2	8/30/06 16:15	433.81	SWPW-1	10/13/06 17:15	471.78
SWPW-2	8/30/06 16:20	433.80	SWPW-1	10/13/06 17:20	471.75
SWPW-2	8/30/06 16:25	433.83	SWPW-1	10/13/06 17:25	471.73
SWPW-2	8/30/06 16:30	433.83	SWPW-1	10/13/06 17:30	471.73
SWPW-2	8/30/06 16:35	433.82	SWPW-1	10/13/06 17:35	471.68
SWPW-2	8/30/06 16:40	433.81	SWPW-1	10/13/06 17:40	471.68
SWPW-2	8/30/06 16:45	433.81	SWPW-1	10/13/06 17:45	471.65
SWPW-2	8/30/06 16:50	433.83	SWPW-1	10/13/06 17:50	471.62
SWPW-2	8/30/06 16:55	433.82	SWPW-1	10/13/06 17:55	471.57
SWPW-2	8/30/06 17:00	433.81	SWPW-1	10/13/06 18:00	471.57
SWPW-2	8/30/06 17:05	433.81	SWPW-1	10/13/06 18:05	471.54
SWPW-2	8/30/06 17:10	433.81	SWPW-1	10/13/06 18:10	471.52
SWPW-2	8/30/06 17:15	433.80	SWPW-1	10/13/06 18:15	471.50
SWPW-2	8/30/06 17:20	433.82	SWPW-1	10/13/06 18:20	471.48
SWPW-2	8/30/06 17:25	433.77	SWPW-1	10/13/06 18:25	471.45
SWPW-2	8/30/06 17:30	433.79	SWPW-1	10/13/06 18:30	471.43
SWPW-2	8/30/06 17:35	433.79	SWPW-1	10/13/06 18:35	471.41
SWPW-2	8/30/06 17:40	433.81	SWPW-1	10/13/06 18:40	471.39
SWPW-2	8/30/06 17:45	433.80	SWPW-1	10/13/06 18:45	471.35
SWPW-2	8/30/06 17:50	433.81	SWPW-1	10/13/06 18:50	471.34
SWPW-2	8/30/06 17:55	433.77	SWPW-1	10/13/06 18:55	471.32
SWPW-2	8/30/06 18:00	433.82	SWPW-1	10/13/06 19:00	471.30
SWPW-2	8/30/06 18:05	433.80	SWPW-1	10/13/06 19:05	471.27
SWPW-2	8/30/06 18:10	433.81	SWPW-1	10/13/06 19:10	471.24
SWPW-2	8/30/06 18:15	433.80	SWPW-1	10/13/06 19:15	471.23
SWPW-2	8/30/06 18:20	433.80	SWPW-1	10/13/06 19:20	471.21
SWPW-2	8/30/06 18:25	433.81	SWPW-1	10/13/06 19:25	471.19
SWPW-2	8/30/06 18:30	433.81	SWPW-1	10/13/06 19:30	471.17
SWPW-2	8/30/06 18:35	433.80	SWPW-1	10/13/06 19:35	471.15
SWPW-2	8/30/06 18:40	433.82	SWPW-1	10/13/06 19:40	471.12
SWPW-2	8/30/06 18:45	433.80	SWPW-1	10/13/06 19:45	471.13
SWPW-2	8/30/06 18:50	433.80	SWPW-1	10/13/06 19:50	471.11
SWPW-2	8/30/06 18:55	433.80	SWPW-1	10/13/06 19:55	471.09
SWPW-2	8/30/06 19:00	433.79	SWPW-1	10/13/06 20:00	471.08
SWPW-2	8/30/06 19:05	433.80	SWPW-1	10/13/06 20:05	471.06
SWPW-2	8/30/06 19:10	433.80	SWPW-1	10/13/06 20:10	471.01
SWPW-2	8/30/06 19:15	433.81	SWPW-1	10/13/06 20:15	470.98
SWPW-2	8/30/06 19:20	433.82	SWPW-1	10/13/06 20:20	471.01
SWPW-2	8/30/06 19:25	433.80	SWPW-1	10/13/06 20:25	470.98
SWPW-2	8/30/06 19:30	433.80	SWPW-1	10/13/06 20:30	470.96
SWPW-2	8/30/06 19:35	433.80	SWPW-1	10/13/06 20:35	470.95
SWPW-2	8/30/06 19:40	433.79	SWPW-1	10/13/06 20:40	470.90
SWPW-2	8/30/06 19:45	433.79	SWPW-1	10/13/06 20:45	470.89
SWPW-2	8/30/06 19:50	433.79	SWPW-1	10/13/06 20:50	470.88
SWPW-2	8/30/06 19:55	433.79	SWPW-1	10/13/06 20:55	470.86
SWPW-2	8/30/06 20:00	433.79	SWPW-1	10/13/06 21:00	470.85
SWPW-2	8/30/06 20:05	433.78	SWPW-1	10/13/06 21:05	470.83
SWPW-2	8/30/06 20:10	433.82	SWPW-1	10/13/06 21:10	470.81
SWPW-2	8/30/06 20:15	433.82	SWPW-1	10/13/06 21:15	470.79
SWPW-2	8/30/06 20:20	433.82	SWPW-1	10/13/06 21:20	470.77
SWPW-2	8/30/06 20:25	433.79	SWPW-1	10/13/06 21:25	470.72
SWPW-2	8/30/06 20:30	433.80	SWPW-1	10/13/06 21:30	470.73
SWPW-2	8/30/06 20:35	433.79	SWPW-1	10/13/06 21:35	470.72
SWPW-2	8/30/06 20:40	433.80	SWPW-1	10/13/06 21:40	470.70
SWPW-2	8/30/06 20:45	433.80	SWPW-1	10/13/06 21:45	470.68
SWPW-2	8/30/06 20:50	433.81	SWPW-1	10/13/06 21:50	470.67
SWPW-2	8/30/06 20:55	433.81	SWPW-1	10/13/06 21:55	470.64
SWPW-2	8/30/06 21:00	433.81	SWPW-1	10/13/06 22:00	470.63
SWPW-2	8/30/06 21:05	433.80	SWPW-1	10/13/06 22:05	470.60
SWPW-2	8/30/06 21:10	433.81	SWPW-1	10/13/06 22:10	470.60
SWPW-2	8/30/06 21:15	433.80	SWPW-1	10/13/06 22:15	470.57
SWPW-2	8/30/06 21:20	433.81	SWPW-1	10/13/06 22:20	470.57
SWPW-2	8/30/06 21:25	433.79	SWPW-1	10/13/06 22:25	470.55
SWPW-2	8/30/06 21:30	433.80	SWPW-1	10/13/06 22:30	470.52
SWPW-2	8/30/06 21:35	433.80	SWPW-1	10/13/06 22:35	470.51
SWPW-2	8/30/06 21:40	433.80	SWPW-1	10/13/06 22:40	470.49
SWPW-2	8/30/06 21:45	433.81	SWPW-1	10/13/06 22:45	470.47
SWPW-2	8/30/06 21:50	433.80	SWPW-1	10/13/06 22:50	470.49
SWPW-2	8/30/06 21:55	433.79	SWPW-1	10/13/06 22:55	470.44
SWPW-2	8/30/06 22:00	433.84	SWPW-1	10/13/06 23:00	470.43
SWPW-2	8/30/06 22:05	433.82	SWPW-1	10/13/06 23:05	470.40
SWPW-2	8/30/06 22:10	433.80	SWPW-1	10/13/06 23:10	470.40
SWPW-2	8/30/06 22:15	433.82	SWPW-1	10/13/06 23:15	470.39
SWPW-2	8/30/06 22:20	433.80	SWPW-1	10/13/06 23:20	470.36
SWPW-2	8/30/06 22:25	433.80	SWPW-1	10/13/06 23:25	470.35
SWPW-2	8/30/06 22:30	433.79	SWPW-1	10/13/06 23:30	470.33
SWPW-2	8/30/06 22:35	433.80	SWPW-1	10/13/06 23:35	470.32
SWPW-2	8/30/06 22:40	433.80	SWPW-1	10/13/06 23:40	470.31
SWPW-2	8/30/06 22:45	433.80	SWPW-1	10/13/06 23:45	470.31
SWPW-2	8/30/06 22:50	433.80	SWPW-1	10/13/06 23:50	470.31
SWPW-2	8/30/06 22:55	433.80	SWPW-1	10/13/06 23:55	470.25
SWPW-2	8/30/06 23:00	433.80	SWPW-1	10/14/06 0:00	470.24
SWPW-2	8/30/06 23:05	433.81	SWPW-1	10/14/06 0:05	470.25
SWPW-2	8/30/06 23:10	433.82	SWPW-1	10/14/06 0:10	470.25
SWPW-2	8/30/06 23:15	433.81	SWPW-1	10/14/06 0:15	470.23
SWPW-2	8/30/06 23:20	433.81	SWPW-1	10/14/06 0:20	470.21
SWPW-2	8/30/06 23:25	433.80	SWPW-1	10/14/06 0:25	470.20
SWPW-2	8/30/06 23:30	433.80	SWPW-1	10/14/06 0:30	470.18
SWPW-2	8/30/06 23:35	433.81	SWPW-1	10/14/06 0:35	470.16
SWPW-2	8/30/06 23:40	433.82	SWPW-1	10/14/06 0:40	470.15
SWPW-2	8/30/06 23:45	433.81	SWPW-1	10/14/06 0:45	470.13
SWPW-2	8/30/06 23:50	433.77	SWPW-1	10/14/06 0:50	470.13
SWPW-2	8/30/06 23:55	433.83	SWPW-1	10/14/06 0:55	470.12

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	8/31/06 0:00	433.81	SWPW-1	10/14/06 1:00	470.08
SWPW-2	8/31/06 0:05	433.81	SWPW-1	10/14/06 1:05	470.08
SWPW-2	8/31/06 0:10	433.78	SWPW-1	10/14/06 1:10	470.07
SWPW-2	8/31/06 0:15	433.81	SWPW-1	10/14/06 1:15	470.05
SWPW-2	8/31/06 0:20	433.82	SWPW-1	10/14/06 1:20	470.03
SWPW-2	8/31/06 0:25	433.82	SWPW-1	10/14/06 1:25	470.00
SWPW-2	8/31/06 0:30	433.83	SWPW-1	10/14/06 1:30	470.01
SWPW-2	8/31/06 0:35	433.83	SWPW-1	10/14/06 1:35	469.99
SWPW-2	8/31/06 0:40	433.83	SWPW-1	10/14/06 1:40	469.98
SWPW-2	8/31/06 0:45	433.80	SWPW-1	10/14/06 1:45	469.97
SWPW-2	8/31/06 0:50	433.79	SWPW-1	10/14/06 1:50	469.95
SWPW-2	8/31/06 0:55	433.83	SWPW-1	10/14/06 1:55	469.94
SWPW-2	8/31/06 1:00	433.82	SWPW-1	10/14/06 2:00	469.94
SWPW-2	8/31/06 1:05	433.83	SWPW-1	10/14/06 2:05	469.91
SWPW-2	8/31/06 1:10	433.82	SWPW-1	10/14/06 2:10	469.91
SWPW-2	8/31/06 1:15	433.83	SWPW-1	10/14/06 2:15	469.90
SWPW-2	8/31/06 1:20	433.84	SWPW-1	10/14/06 2:20	469.91
SWPW-2	8/31/06 1:25	433.84	SWPW-1	10/14/06 2:25	469.88
SWPW-2	8/31/06 1:30	433.79	SWPW-1	10/14/06 2:30	469.86
SWPW-2	8/31/06 1:35	433.84	SWPW-1	10/14/06 2:35	469.85
SWPW-2	8/31/06 1:40	433.83	SWPW-1	10/14/06 2:40	469.82
SWPW-2	8/31/06 1:45	433.83	SWPW-1	10/14/06 2:45	469.81
SWPW-2	8/31/06 1:50	433.83	SWPW-1	10/14/06 2:50	469.80
SWPW-2	8/31/06 1:55	433.82	SWPW-1	10/14/06 2:55	469.79
SWPW-2	8/31/06 2:00	433.83	SWPW-1	10/14/06 3:00	469.78
SWPW-2	8/31/06 2:05	433.82	SWPW-1	10/14/06 3:05	469.77
SWPW-2	8/31/06 2:10	433.83	SWPW-1	10/14/06 3:10	469.74
SWPW-2	8/31/06 2:15	433.83	SWPW-1	10/14/06 3:15	469.73
SWPW-2	8/31/06 2:20	433.84	SWPW-1	10/14/06 3:20	469.73
SWPW-2	8/31/06 2:25	433.84	SWPW-1	10/14/06 3:25	469.72
SWPW-2	8/31/06 2:30	433.83	SWPW-1	10/14/06 3:30	469.71
SWPW-2	8/31/06 2:35	433.83	SWPW-1	10/14/06 3:35	469.69
SWPW-2	8/31/06 2:40	433.87	SWPW-1	10/14/06 3:40	469.67
SWPW-2	8/31/06 2:45	433.83	SWPW-1	10/14/06 3:45	469.66
SWPW-2	8/31/06 2:50	433.84	SWPW-1	10/14/06 3:50	469.64
SWPW-2	8/31/06 2:55	433.85	SWPW-1	10/14/06 3:55	469.64
SWPW-2	8/31/06 3:00	433.85	SWPW-1	10/14/06 4:00	469.62
SWPW-2	8/31/06 3:05	433.85	SWPW-1	10/14/06 4:05	469.61
SWPW-2	8/31/06 3:10	433.85	SWPW-1	10/14/06 4:10	469.60
SWPW-2	8/31/06 3:15	433.83	SWPW-1	10/14/06 4:15	469.62
SWPW-2	8/31/06 3:20	433.86	SWPW-1	10/14/06 4:20	469.58
SWPW-2	8/31/06 3:25	433.87	SWPW-1	10/14/06 4:25	469.56
SWPW-2	8/31/06 3:30	433.86	SWPW-1	10/14/06 4:30	469.58
SWPW-2	8/31/06 3:35	433.86	SWPW-1	10/14/06 4:35	469.57
SWPW-2	8/31/06 3:40	433.86	SWPW-1	10/14/06 4:40	469.57
SWPW-2	8/31/06 3:45	433.86	SWPW-1	10/14/06 4:45	469.52
SWPW-2	8/31/06 3:50	433.87	SWPW-1	10/14/06 4:50	469.51
SWPW-2	8/31/06 3:55	433.89	SWPW-1	10/14/06 4:55	469.50
SWPW-2	8/31/06 4:00	433.87	SWPW-1	10/14/06 5:00	469.52
SWPW-2	8/31/06 4:05	433.87	SWPW-1	10/14/06 5:05	469.48
SWPW-2	8/31/06 4:10	433.87	SWPW-1	10/14/06 5:10	469.50
SWPW-2	8/31/06 4:15	433.88	SWPW-1	10/14/06 5:15	469.50
SWPW-2	8/31/06 4:20	433.88	SWPW-1	10/14/06 5:20	469.45
SWPW-2	8/31/06 4:25	433.88	SWPW-1	10/14/06 5:25	469.43
SWPW-2	8/31/06 4:30	433.88	SWPW-1	10/14/06 5:30	469.42
SWPW-2	8/31/06 4:35	433.89	SWPW-1	10/14/06 5:35	469.42
SWPW-2	8/31/06 4:40	433.90	SWPW-1	10/14/06 5:40	469.41
SWPW-2	8/31/06 4:45	433.88	SWPW-1	10/14/06 5:45	469.43
SWPW-2	8/31/06 4:50	433.89	SWPW-1	10/14/06 5:50	469.42
SWPW-2	8/31/06 4:55	433.89	SWPW-1	10/14/06 5:55	469.37
SWPW-2	8/31/06 5:00	433.89	SWPW-1	10/14/06 6:00	469.37
SWPW-2	8/31/06 5:05	433.89	SWPW-1	10/14/06 6:05	469.38
SWPW-2	8/31/06 5:10	433.89	SWPW-1	10/14/06 6:10	469.38
SWPW-2	8/31/06 5:15	433.89	SWPW-1	10/14/06 6:15	469.36
SWPW-2	8/31/06 5:20	433.89	SWPW-1	10/14/06 6:20	469.33
SWPW-2	8/31/06 5:25	433.89	SWPW-1	10/14/06 6:25	469.34
SWPW-2	8/31/06 5:30	433.91	SWPW-1	10/14/06 6:30	469.30
SWPW-2	8/31/06 5:35	433.89	SWPW-1	10/14/06 6:35	469.29
SWPW-2	8/31/06 5:40	433.89	SWPW-1	10/14/06 6:40	469.31
SWPW-2	8/31/06 5:45	433.90	SWPW-1	10/14/06 6:45	469.26
SWPW-2	8/31/06 5:50	433.89	SWPW-1	10/14/06 6:50	469.26
SWPW-2	8/31/06 5:55	433.94	SWPW-1	10/14/06 6:55	469.28
SWPW-2	8/31/06 6:00	433.89	SWPW-1	10/14/06 7:00	469.28
SWPW-2	8/31/06 6:05	433.89	SWPW-1	10/14/06 7:05	469.26
SWPW-2	8/31/06 6:10	433.93	SWPW-1	10/14/06 7:10	469.25
SWPW-2	8/31/06 6:15	433.89	SWPW-1	10/14/06 7:15	469.24
SWPW-2	8/31/06 6:20	433.92	SWPW-1	10/14/06 7:20	469.23
SWPW-2	8/31/06 6:25	433.92	SWPW-1	10/14/06 7:25	469.22
SWPW-2	8/31/06 6:30	433.93	SWPW-1	10/14/06 7:30	469.21
SWPW-2	8/31/06 6:35	433.89	SWPW-1	10/14/06 7:35	469.20
SWPW-2	8/31/06 6:40	433.94	SWPW-1	10/14/06 7:40	469.19
SWPW-2	8/31/06 6:45	433.93	SWPW-1	10/14/06 7:45	469.18
SWPW-2	8/31/06 6:50	433.91	SWPW-1	10/14/06 7:50	469.17
SWPW-2	8/31/06 6:55	433.90	SWPW-1	10/14/06 7:55	469.16
SWPW-2	8/31/06 7:00	433.91	SWPW-1	10/14/06 8:00	469.14
SWPW-2	8/31/06 7:05	433.91	SWPW-1	10/14/06 8:05	469.14
SWPW-2	8/31/06 7:10	433.91	SWPW-1	10/14/06 8:10	469.12
SWPW-2	8/31/06 7:15	433.92	SWPW-1	10/14/06 8:15	469.12
SWPW-2	8/31/06 7:20	433.90	SWPW-1	10/14/06 8:20	469.08
SWPW-2	8/31/06 7:25	433.92	SWPW-1	10/14/06 8:25	469.10
SWPW-2	8/31/06 7:30	433.93	SWPW-1	10/14/06 8:30	469.09
SWPW-2	8/31/06 7:35	433.95	SWPW-1	10/14/06 8:35	469.05
SWPW-2	8/31/06 7:40	433.93	SWPW-1	10/14/06 8:40	469.07
SWPW-2	8/31/06 7:45	433.93	SWPW-1	10/14/06 8:45	469.05
SWPW-2	8/31/06 7:50	433.89	SWPW-1	10/14/06 8:50	469.06
SWPW-2	8/31/06 7:55	433.92	SWPW-1	10/14/06 8:55	469.05
SWPW-2	8/31/06 8:00	433.93	SWPW-1	10/14/06 9:00	469.04
SWPW-2	8/31/06 8:05	433.93	SWPW-1	10/14/06 9:05	469.02
SWPW-2	8/31/06 8:10	433.93	SWPW-1	10/14/06 9:10	469.01
SWPW-2	8/31/06 8:15	433.93	SWPW-1	10/14/06 9:15	469.01

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	8/31/06 8:20	433.92	SWPW-1	10/14/06 9:20	468.99
SWPW-2	8/31/06 8:25	433.92	SWPW-1	10/14/06 9:25	469.00
SWPW-2	8/31/06 8:30	433.92	SWPW-1	10/14/06 9:30	468.98
SWPW-2	8/31/06 8:35	433.91	SWPW-1	10/14/06 9:35	468.98
SWPW-2	8/31/06 8:40	433.92	SWPW-1	10/14/06 9:40	468.96
SWPW-2	8/31/06 8:45	433.93	SWPW-1	10/14/06 9:45	468.95
SWPW-2	8/31/06 8:50	433.92	SWPW-1	10/14/06 9:50	468.95
SWPW-2	8/31/06 8:55	433.93	SWPW-1	10/14/06 9:55	468.93
SWPW-2	8/31/06 9:00	433.92	SWPW-1	10/14/06 10:00	468.93
SWPW-2	8/31/06 9:05	433.94	SWPW-1	10/14/06 10:05	468.91
SWPW-2	8/31/06 9:10	433.93	SWPW-1	10/14/06 10:10	468.90
SWPW-2	8/31/06 9:15	433.94	SWPW-1	10/14/06 10:15	468.90
SWPW-2	8/31/06 9:20	433.92	SWPW-1	10/14/06 10:20	468.88
SWPW-2	8/31/06 9:25	433.92	SWPW-1	10/14/06 10:25	468.88
SWPW-2	8/31/06 9:30	433.92	SWPW-1	10/14/06 10:30	468.86
SWPW-2	8/31/06 9:35	433.93	SWPW-1	10/14/06 10:35	468.86
SWPW-2	8/31/06 9:40	433.92	SWPW-1	10/14/06 10:40	468.85
SWPW-2	8/31/06 9:45	433.92	SWPW-1	10/14/06 10:45	468.84
SWPW-2	8/31/06 9:50	433.92	SWPW-1	10/14/06 10:50	468.82
SWPW-2	8/31/06 9:55	433.92	SWPW-1	10/14/06 10:55	468.82
SWPW-2	8/31/06 10:00	433.94	SWPW-1	10/14/06 11:00	468.80
SWPW-2	8/31/06 10:05	433.96	SWPW-1	10/14/06 11:05	468.80
SWPW-2	8/31/06 10:10	433.91	SWPW-1	10/14/06 11:10	468.79
SWPW-2	8/31/06 10:15	433.92	SWPW-1	10/14/06 11:15	468.79
SWPW-2	8/31/06 10:20	433.91	SWPW-1	10/14/06 11:20	468.76
SWPW-2	8/31/06 10:25	433.91	SWPW-1	10/14/06 11:25	468.76
SWPW-2	8/31/06 10:30	433.95	SWPW-1	10/14/06 11:30	468.75
SWPW-2	8/31/06 10:35	433.91	SWPW-1	10/14/06 11:35	468.75
SWPW-2	8/31/06 10:40	433.92	SWPW-1	10/14/06 11:40	468.73
SWPW-2	8/31/06 10:45	433.96	SWPW-1	10/14/06 11:45	468.73
SWPW-2	8/31/06 10:50	433.93	SWPW-1	10/14/06 11:50	468.71
SWPW-2	8/31/06 10:55	433.92	SWPW-1	10/14/06 11:55	468.70
SWPW-2	8/31/06 11:00	433.91	SWPW-1	10/14/06 12:00	468.70
SWPW-2	8/31/06 11:05	433.95	SWPW-1	10/14/06 12:05	468.69
SWPW-2	8/31/06 11:10	433.93	SWPW-1	10/14/06 12:10	468.68
SWPW-2	8/31/06 11:15	433.91	SWPW-1	10/14/06 12:15	468.67
SWPW-2	8/31/06 11:20	433.92	SWPW-1	10/14/06 12:20	468.66
SWPW-2	8/31/06 11:25	433.92	SWPW-1	10/14/06 12:25	468.64
SWPW-2	8/31/06 11:30	433.93	SWPW-1	10/14/06 12:30	468.64
SWPW-2	8/31/06 11:35	433.93	SWPW-1	10/14/06 12:35	468.60
SWPW-2	8/31/06 11:40	433.94	SWPW-1	10/14/06 12:40	468.62
SWPW-2	8/31/06 11:45	433.93	SWPW-1	10/14/06 12:45	468.61
SWPW-2	8/31/06 11:50	433.90	SWPW-1	10/14/06 12:50	468.61
SWPW-2	8/31/06 11:55	433.93	SWPW-1	10/14/06 12:55	468.59
SWPW-2	8/31/06 12:00	433.92	SWPW-1	10/14/06 13:00	468.58
SWPW-2	8/31/06 12:05	433.92	SWPW-1	10/14/06 13:05	468.58
SWPW-2	8/31/06 12:10	433.93	SWPW-1	10/14/06 13:10	468.56
SWPW-2	8/31/06 12:15	433.92	SWPW-1	10/14/06 13:15	468.55
SWPW-2	8/31/06 12:20	433.91	SWPW-1	10/14/06 13:20	468.55
SWPW-2	8/31/06 12:25	433.89	SWPW-1	10/14/06 13:25	468.54
SWPW-2	8/31/06 12:30	433.93	SWPW-1	10/14/06 13:30	468.56
SWPW-2	8/31/06 12:35	433.93	SWPW-1	10/14/06 13:35	468.52
SWPW-2	8/31/06 12:40	433.93	SWPW-1	10/14/06 13:40	468.53
SWPW-2	8/31/06 12:45	433.92	SWPW-1	10/14/06 13:45	468.51
SWPW-2	8/31/06 12:50	433.92	SWPW-1	10/14/06 13:50	468.50
SWPW-2	8/31/06 12:55	433.95	SWPW-1	10/14/06 13:55	468.49
SWPW-2	8/31/06 13:00	433.91	SWPW-1	10/14/06 14:00	468.48
SWPW-2	8/31/06 13:05	433.92	SWPW-1	10/14/06 14:05	468.48
SWPW-2	8/31/06 13:10	433.92	SWPW-1	10/14/06 14:10	468.46
SWPW-2	8/31/06 13:15	433.87	SWPW-1	10/14/06 14:15	468.45
SWPW-2	8/31/06 13:20	433.91	SWPW-1	10/14/06 14:20	468.44
SWPW-2	8/31/06 13:25	433.92	SWPW-1	10/14/06 14:25	468.44
SWPW-2	8/31/06 13:30	433.90	SWPW-1	10/14/06 14:30	468.43
SWPW-2	8/31/06 13:35	433.91	SWPW-1	10/14/06 14:35	468.43
SWPW-2	8/31/06 13:40	433.95	SWPW-1	10/14/06 14:40	468.42
SWPW-2	8/31/06 13:45	433.92	SWPW-1	10/14/06 14:45	468.40
SWPW-2	8/31/06 13:50	433.90	SWPW-1	10/14/06 14:50	468.39
SWPW-2	8/31/06 13:55	433.90	SWPW-1	10/14/06 14:55	468.38
SWPW-2	8/31/06 14:00	433.91	SWPW-1	10/14/06 15:00	468.38
SWPW-2	8/31/06 14:05	433.92	SWPW-1	10/14/06 15:05	468.37
SWPW-2	8/31/06 14:10	433.91	SWPW-1	10/14/06 15:10	468.39
SWPW-2	8/31/06 14:15	433.89	SWPW-1	10/14/06 15:15	468.35
SWPW-2	8/31/06 14:20	433.92	SWPW-1	10/14/06 15:20	468.36
SWPW-2	8/31/06 14:25	433.88	SWPW-1	10/14/06 15:25	468.34
SWPW-2	8/31/06 14:30	433.89	SWPW-1	10/14/06 15:30	468.33
SWPW-2	8/31/06 14:35	433.88	SWPW-1	10/14/06 15:35	468.32
SWPW-2	8/31/06 14:40	433.90	SWPW-1	10/14/06 15:40	468.31
SWPW-2	8/31/06 14:45	433.88	SWPW-1	10/14/06 15:45	468.30
SWPW-2	8/31/06 14:50	433.89	SWPW-1	10/14/06 15:50	468.18
SWPW-2	8/31/06 14:55	433.89	SWPW-1	10/14/06 15:55	468.32
SWPW-2	8/31/06 15:00	433.89	SWPW-1	10/14/06 16:00	468.30
SWPW-2	8/31/06 15:05	433.90	SWPW-1	10/14/06 16:05	468.29
SWPW-2	8/31/06 15:10	433.90	SWPW-1	10/14/06 16:10	468.28
SWPW-2	8/31/06 15:15	433.89	SWPW-1	10/14/06 16:15	468.27
SWPW-2	8/31/06 15:20	433.88	SWPW-1	10/14/06 16:20	468.30
SWPW-2	8/31/06 15:25	433.89	SWPW-1	10/14/06 16:25	468.25
SWPW-2	8/31/06 15:30	433.91	SWPW-1	10/14/06 16:30	468.25
SWPW-2	8/31/06 15:35	433.88	SWPW-1	10/14/06 16:35	468.24
SWPW-2	8/31/06 15:40	433.87	SWPW-1	10/14/06 16:40	468.26
SWPW-2	8/31/06 15:45	433.90	SWPW-1	10/14/06 16:45	468.24
SWPW-2	8/31/06 15:50	433.89	SWPW-1	10/14/06 16:50	468.22
SWPW-2	8/31/06 15:55	433.89	SWPW-1	10/14/06 16:55	468.22
SWPW-2	8/31/06 16:00	433.88	SWPW-1	10/14/06 17:00	468.21
SWPW-2	8/31/06 16:05	433.89	SWPW-1	10/14/06 17:05	468.21
SWPW-2	8/31/06 16:10	433.90	SWPW-1	10/14/06 17:10	468.19
SWPW-2	8/31/06 16:15	433.90	SWPW-1	10/14/06 17:15	468.19
SWPW-2	8/31/06 16:20	433.88	SWPW-1	10/14/06 17:20	468.18
SWPW-2	8/31/06 16:25	433.89	SWPW-1	10/14/06 17:25	468.17
SWPW-2	8/31/06 16:30	433.88	SWPW-1	10/14/06 17:30	468.16
SWPW-2	8/31/06 16:35	433.90	SWPW-1	10/14/06 17:35	468.20

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	8/31/06 16:40	433.88	SWPW-1	10/14/06 17:40	468.16
SWPW-2	8/31/06 16:45	433.88	SWPW-1	10/14/06 17:45	468.17
SWPW-2	8/31/06 16:50	433.89	SWPW-1	10/14/06 17:50	468.14
SWPW-2	8/31/06 16:55	433.89	SWPW-1	10/14/06 17:55	468.15
SWPW-2	8/31/06 17:00	433.88	SWPW-1	10/14/06 18:00	468.13
SWPW-2	8/31/06 17:05	433.92	SWPW-1	10/14/06 18:05	468.12
SWPW-2	8/31/06 17:10	433.88	SWPW-1	10/14/06 18:10	468.12
SWPW-2	8/31/06 17:15	433.88	SWPW-1	10/14/06 18:15	468.14
SWPW-2	8/31/06 17:20	433.93	SWPW-1	10/14/06 18:20	468.10
SWPW-2	8/31/06 17:25	433.89	SWPW-1	10/14/06 18:25	468.09
SWPW-2	8/31/06 17:30	433.89	SWPW-1	10/14/06 18:30	468.12
SWPW-2	8/31/06 17:35	433.92	SWPW-1	10/14/06 18:35	468.11
SWPW-2	8/31/06 17:40	433.89	SWPW-1	10/14/06 18:40	468.08
SWPW-2	8/31/06 17:45	433.88	SWPW-1	10/14/06 18:45	468.11
SWPW-2	8/31/06 17:50	433.91	SWPW-1	10/14/06 18:50	468.07
SWPW-2	8/31/06 17:55	433.88	SWPW-1	10/14/06 18:55	468.06
SWPW-2	8/31/06 18:00	433.89	SWPW-1	10/14/06 19:00	468.10
SWPW-2	8/31/06 18:05	433.88	SWPW-1	10/14/06 19:05	468.08
SWPW-2	8/31/06 18:10	433.89	SWPW-1	10/14/06 19:10	468.07
SWPW-2	8/31/06 18:15	433.88	SWPW-1	10/14/06 19:15	468.07
SWPW-2	8/31/06 18:20	433.92	SWPW-1	10/14/06 19:20	468.04
SWPW-2	8/31/06 18:25	433.87	SWPW-1	10/14/06 19:25	468.02
SWPW-2	8/31/06 18:30	433.88	SWPW-1	10/14/06 19:30	468.02
SWPW-2	8/31/06 18:35	433.87	SWPW-1	10/14/06 19:35	468.04
SWPW-2	8/31/06 18:40	433.87	SWPW-1	10/14/06 19:40	468.04
SWPW-2	8/31/06 18:45	433.89	SWPW-1	10/14/06 19:45	468.00
SWPW-2	8/31/06 18:50	433.88	SWPW-1	10/14/06 19:50	467.99
SWPW-2	8/31/06 18:55	433.88	SWPW-1	10/14/06 19:55	468.02
SWPW-2	8/31/06 19:00	433.88	SWPW-1	10/14/06 20:00	467.98
SWPW-2	8/31/06 19:05	433.88	SWPW-1	10/14/06 20:05	467.97
SWPW-2	8/31/06 19:10	433.87	SWPW-1	10/14/06 20:10	468.01
SWPW-2	8/31/06 19:15	433.91	SWPW-1	10/14/06 20:15	467.97
SWPW-2	8/31/06 19:20	433.87	SWPW-1	10/14/06 20:20	467.99
SWPW-2	8/31/06 19:25	433.87	SWPW-1	10/14/06 20:25	467.99
SWPW-2	8/31/06 19:30	433.86	SWPW-1	10/14/06 20:30	467.95
SWPW-2	8/31/06 19:35	433.87	SWPW-1	10/14/06 20:35	467.93
SWPW-2	8/31/06 19:40	433.90	SWPW-1	10/14/06 20:40	467.93
SWPW-2	8/31/06 19:45	433.90	SWPW-1	10/14/06 20:45	467.96
SWPW-2	8/31/06 19:50	433.89	SWPW-1	10/14/06 20:50	467.95
SWPW-2	8/31/06 19:55	433.86	SWPW-1	10/14/06 20:55	467.91
SWPW-2	8/31/06 20:00	433.91	SWPW-1	10/14/06 21:00	467.94
SWPW-2	8/31/06 20:05	433.89	SWPW-1	10/14/06 21:05	467.92
SWPW-2	8/31/06 20:10	433.89	SWPW-1	10/14/06 21:10	467.92
SWPW-2	8/31/06 20:15	433.90	SWPW-1	10/14/06 21:15	467.93
SWPW-2	8/31/06 20:20	433.88	SWPW-1	10/14/06 21:20	467.91
SWPW-2	8/31/06 20:25	433.87	SWPW-1	10/14/06 21:25	467.89
SWPW-2	8/31/06 20:30	433.89	SWPW-1	10/14/06 21:30	467.87
SWPW-2	8/31/06 20:35	433.87	SWPW-1	10/14/06 21:35	467.87
SWPW-2	8/31/06 20:40	433.92	SWPW-1	10/14/06 21:40	467.89
SWPW-2	8/31/06 20:45	433.87	SWPW-1	10/14/06 21:45	467.89
SWPW-2	8/31/06 20:50	433.88	SWPW-1	10/14/06 21:50	467.89
SWPW-2	8/31/06 20:55	433.92	SWPW-1	10/14/06 21:55	467.88
SWPW-2	8/31/06 21:00	433.88	SWPW-1	10/14/06 22:00	467.83
SWPW-2	8/31/06 21:05	433.90	SWPW-1	10/14/06 22:05	467.86
SWPW-2	8/31/06 21:10	433.90	SWPW-1	10/14/06 22:10	467.88
SWPW-2	8/31/06 21:15	433.90	SWPW-1	10/14/06 22:15	467.84
SWPW-2	8/31/06 21:20	433.90	SWPW-1	10/14/06 22:20	467.82
SWPW-2	8/31/06 21:25	433.89	SWPW-1	10/14/06 22:25	467.83
SWPW-2	8/31/06 21:30	433.90	SWPW-1	10/14/06 22:30	467.80
SWPW-2	8/31/06 21:35	433.89	SWPW-1	10/14/06 22:35	467.79
SWPW-2	8/31/06 21:40	433.89	SWPW-1	10/14/06 22:40	467.82
SWPW-2	8/31/06 21:45	433.89	SWPW-1	10/14/06 22:45	467.81
SWPW-2	8/31/06 21:50	433.89	SWPW-1	10/14/06 22:50	467.82
SWPW-2	8/31/06 21:55	433.89	SWPW-1	10/14/06 22:55	467.77
SWPW-2	8/31/06 22:00	433.89	SWPW-1	10/14/06 23:00	467.76
SWPW-2	8/31/06 22:05	433.90	SWPW-1	10/14/06 23:05	467.79
SWPW-2	8/31/06 22:10	433.90	SWPW-1	10/14/06 23:10	467.79
SWPW-2	8/31/06 22:15	433.90	SWPW-1	10/14/06 23:15	467.78
SWPW-2	8/31/06 22:20	433.87	SWPW-1	10/14/06 23:20	467.78
SWPW-2	8/31/06 22:25	433.87	SWPW-1	10/14/06 23:25	467.77
SWPW-2	8/31/06 22:30	433.91	SWPW-1	10/14/06 23:30	467.77
SWPW-2	8/31/06 22:35	433.89	SWPW-1	10/14/06 23:35	467.76
SWPW-2	8/31/06 22:40	433.92	SWPW-1	10/14/06 23:40	467.75
SWPW-2	8/31/06 22:45	433.89	SWPW-1	10/14/06 23:45	467.74
SWPW-2	8/31/06 22:50	433.91	SWPW-1	10/14/06 23:50	467.71
SWPW-2	8/31/06 22:55	433.92	SWPW-1	10/14/06 23:55	467.71
SWPW-2	8/31/06 23:00	433.91	SWPW-1	10/15/06 0:00	467.73
SWPW-2	8/31/06 23:05	433.88	SWPW-1	10/15/06 0:05	467.72
SWPW-2	8/31/06 23:10	433.91	SWPW-1	10/15/06 0:10	467.72
SWPW-2	8/31/06 23:15	433.87	SWPW-1	10/15/06 0:15	467.71
SWPW-2	8/31/06 23:20	433.87	SWPW-1	10/15/06 0:20	467.70
SWPW-2	8/31/06 23:25	433.89	SWPW-1	10/15/06 0:25	467.69
SWPW-2	8/31/06 23:30	433.90	SWPW-1	10/15/06 0:30	467.67
SWPW-2	8/31/06 23:35	433.89	SWPW-1	10/15/06 0:35	467.69
SWPW-2	8/31/06 23:40	433.89	SWPW-1	10/15/06 0:40	467.65
SWPW-2	8/31/06 23:45	433.88	SWPW-1	10/15/06 0:45	467.68
SWPW-2	8/31/06 23:50	433.89	SWPW-1	10/15/06 0:50	467.63
SWPW-2	8/31/06 23:55	433.89	SWPW-1	10/15/06 0:55	467.66
SWPW-2	9/1/06 0:00	433.89	SWPW-1	10/15/06 1:00	467.66
SWPW-2	9/1/06 0:05	433.90	SWPW-1	10/15/06 1:05	467.65
SWPW-2	9/1/06 0:10	433.89	SWPW-1	10/15/06 1:10	467.65
SWPW-2	9/1/06 0:15	433.90	SWPW-1	10/15/06 1:15	467.64
SWPW-2	9/1/06 0:20	433.88	SWPW-1	10/15/06 1:20	467.64
SWPW-2	9/1/06 0:25	433.89	SWPW-1	10/15/06 1:25	467.63
SWPW-2	9/1/06 0:30	433.92	SWPW-1	10/15/06 1:30	467.63
SWPW-2	9/1/06 0:35	433.92	SWPW-1	10/15/06 1:35	467.62
SWPW-2	9/1/06 0:40	433.89	SWPW-1	10/15/06 1:40	467.60
SWPW-2	9/1/06 0:45	433.89	SWPW-1	10/15/06 1:45	467.61
SWPW-2	9/1/06 0:50	433.90	SWPW-1	10/15/06 1:50	467.57
SWPW-2	9/1/06 0:55	433.89	SWPW-1	10/15/06 1:55	467.60

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/1/06 1:00	433.94	SWPW-1	10/15/06 2:00	467.59
SWPW-2	9/1/06 1:05	433.90	SWPW-1	10/15/06 2:05	467.58
SWPW-2	9/1/06 1:10	433.91	SWPW-1	10/15/06 2:10	467.58
SWPW-2	9/1/06 1:15	433.91	SWPW-1	10/15/06 2:15	467.57
SWPW-2	9/1/06 1:20	433.92	SWPW-1	10/15/06 2:20	467.60
SWPW-2	9/1/06 1:25	433.91	SWPW-1	10/15/06 2:25	467.56
SWPW-2	9/1/06 1:30	433.91	SWPW-1	10/15/06 2:30	467.55
SWPW-2	9/1/06 1:35	433.91	SWPW-1	10/15/06 2:35	467.55
SWPW-2	9/1/06 1:40	433.91	SWPW-1	10/15/06 2:40	467.54
SWPW-2	9/1/06 1:45	433.92	SWPW-1	10/15/06 2:45	467.54
SWPW-2	9/1/06 1:50	433.91	SWPW-1	10/15/06 2:50	467.54
SWPW-2	9/1/06 1:55	433.92	SWPW-1	10/15/06 2:55	467.53
SWPW-2	9/1/06 2:00	433.92	SWPW-1	10/15/06 3:00	467.52
SWPW-2	9/1/06 2:05	433.92	SWPW-1	10/15/06 3:05	467.52
SWPW-2	9/1/06 2:10	433.88	SWPW-1	10/15/06 3:10	467.52
SWPW-2	9/1/06 2:15	433.91	SWPW-1	10/15/06 3:15	467.48
SWPW-2	9/1/06 2:20	433.92	SWPW-1	10/15/06 3:20	467.50
SWPW-2	9/1/06 2:25	433.91	SWPW-1	10/15/06 3:25	467.49
SWPW-2	9/1/06 2:30	433.92	SWPW-1	10/15/06 3:30	467.47
SWPW-2	9/1/06 2:35	433.91	SWPW-1	10/15/06 3:35	467.47
SWPW-2	9/1/06 2:40	433.91	SWPW-1	10/15/06 3:40	467.46
SWPW-2	9/1/06 2:45	433.91	SWPW-1	10/15/06 3:45	467.44
SWPW-2	9/1/06 2:50	433.92	SWPW-1	10/15/06 3:50	467.44
SWPW-2	9/1/06 2:55	433.92	SWPW-1	10/15/06 3:55	467.43
SWPW-2	9/1/06 3:00	433.93	SWPW-1	10/15/06 4:00	467.43
SWPW-2	9/1/06 3:05	433.91	SWPW-1	10/15/06 4:05	467.42
SWPW-2	9/1/06 3:10	433.90	SWPW-1	10/15/06 4:10	467.41
SWPW-2	9/1/06 3:15	433.91	SWPW-1	10/15/06 4:15	467.41
SWPW-2	9/1/06 3:20	433.93	SWPW-1	10/15/06 4:20	467.40
SWPW-2	9/1/06 3:25	433.92	SWPW-1	10/15/06 4:25	467.39
SWPW-2	9/1/06 3:30	433.92	SWPW-1	10/15/06 4:30	467.38
SWPW-2	9/1/06 3:35	433.91	SWPW-1	10/15/06 4:35	467.37
SWPW-2	9/1/06 3:40	433.92	SWPW-1	10/15/06 4:40	467.37
SWPW-2	9/1/06 3:45	433.91	SWPW-1	10/15/06 4:45	467.37
SWPW-2	9/1/06 3:50	433.92	SWPW-1	10/15/06 4:50	467.36
SWPW-2	9/1/06 3:55	433.92	SWPW-1	10/15/06 4:55	467.35
SWPW-2	9/1/06 4:00	433.92	SWPW-1	10/15/06 5:00	467.35
SWPW-2	9/1/06 4:05	433.92	SWPW-1	10/15/06 5:05	467.35
SWPW-2	9/1/06 4:10	433.92	SWPW-1	10/15/06 5:10	467.33
SWPW-2	9/1/06 4:15	433.90	SWPW-1	10/15/06 5:15	467.32
SWPW-2	9/1/06 4:20	433.92	SWPW-1	10/15/06 5:20	467.32
SWPW-2	9/1/06 4:25	433.91	SWPW-1	10/15/06 5:25	467.32
SWPW-2	9/1/06 4:30	433.91	SWPW-1	10/15/06 5:30	467.32
SWPW-2	9/1/06 4:35	433.91	SWPW-1	10/15/06 5:35	467.30
SWPW-2	9/1/06 4:40	433.92	SWPW-1	10/15/06 5:40	467.31
SWPW-2	9/1/06 4:45	433.92	SWPW-1	10/15/06 5:45	467.29
SWPW-2	9/1/06 4:50	433.96	SWPW-1	10/15/06 5:50	467.29
SWPW-2	9/1/06 4:55	433.91	SWPW-1	10/15/06 5:55	467.30
SWPW-2	9/1/06 5:00	433.92	SWPW-1	10/15/06 6:00	467.32
SWPW-2	9/1/06 5:05	433.92	SWPW-1	10/15/06 6:05	467.28
SWPW-2	9/1/06 5:10	433.92	SWPW-1	10/15/06 6:10	467.27
SWPW-2	9/1/06 5:15	433.92	SWPW-1	10/15/06 6:15	467.28
SWPW-2	9/1/06 5:20	433.95	SWPW-1	10/15/06 6:20	467.26
SWPW-2	9/1/06 5:25	433.93	SWPW-1	10/15/06 6:25	467.27
SWPW-2	9/1/06 5:30	433.93	SWPW-1	10/15/06 6:30	467.26
SWPW-2	9/1/06 5:35	433.92	SWPW-1	10/15/06 6:35	467.25
SWPW-2	9/1/06 5:40	433.95	SWPW-1	10/15/06 6:40	467.24
SWPW-2	9/1/06 5:45	433.92	SWPW-1	10/15/06 6:45	467.27
SWPW-2	9/1/06 5:50	433.92	SWPW-1	10/15/06 6:50	467.24
SWPW-2	9/1/06 5:55	433.92	SWPW-1	10/15/06 6:55	467.22
SWPW-2	9/1/06 6:00	433.93	SWPW-1	10/15/06 7:00	467.22
SWPW-2	9/1/06 6:05	433.92	SWPW-1	10/15/06 7:05	467.22
SWPW-2	9/1/06 6:10	433.93	SWPW-1	10/15/06 7:10	467.22
SWPW-2	9/1/06 6:15	433.93	SWPW-1	10/15/06 7:15	467.20
SWPW-2	9/1/06 6:20	433.92	SWPW-1	10/15/06 7:20	467.22
SWPW-2	9/1/06 6:25	433.93	SWPW-1	10/15/06 7:25	467.19
SWPW-2	9/1/06 6:30	433.93	SWPW-1	10/15/06 7:30	467.20
SWPW-2	9/1/06 6:35	433.93	SWPW-1	10/15/06 7:35	467.19
SWPW-2	9/1/06 6:40	433.92	SWPW-1	10/15/06 7:40	467.23
SWPW-2	9/1/06 6:45	433.93	SWPW-1	10/15/06 7:45	467.19
SWPW-2	9/1/06 6:50	433.92	SWPW-1	10/15/06 7:50	467.19
SWPW-2	9/1/06 6:55	433.94	SWPW-1	10/15/06 7:55	467.13
SWPW-2	9/1/06 7:00	433.93	SWPW-1	10/15/06 8:00	467.21
SWPW-2	9/1/06 7:05	433.92	SWPW-1	10/15/06 8:05	467.17
SWPW-2	9/1/06 7:10	433.93	SWPW-1	10/15/06 8:10	467.20
SWPW-2	9/1/06 7:15	433.94	SWPW-1	10/15/06 8:15	467.19
SWPW-2	9/1/06 7:20	433.94	SWPW-1	10/15/06 8:20	467.19
SWPW-2	9/1/06 7:25	433.96	SWPW-1	10/15/06 8:25	467.19
SWPW-2	9/1/06 7:30	433.95	SWPW-1	10/15/06 8:30	467.18
SWPW-2	9/1/06 7:35	433.98	SWPW-1	10/15/06 8:35	467.17
SWPW-2	9/1/06 7:40	433.95	SWPW-1	10/15/06 8:40	467.16
SWPW-2	9/1/06 7:45	433.95	SWPW-1	10/15/06 8:45	467.17
SWPW-2	9/1/06 7:50	433.94	SWPW-1	10/15/06 8:50	467.15
SWPW-2	9/1/06 7:55	433.95	SWPW-1	10/15/06 8:55	467.16
SWPW-2	9/1/06 8:00	433.95	SWPW-1	10/15/06 9:00	467.12
SWPW-2	9/1/06 8:05	433.94	SWPW-1	10/15/06 9:05	467.15
SWPW-2	9/1/06 8:10	433.94	SWPW-1	10/15/06 9:10	467.14
SWPW-2	9/1/06 8:15	433.95	SWPW-1	10/15/06 9:15	467.11
SWPW-2	9/1/06 8:20	433.95	SWPW-1	10/15/06 9:20	467.13
SWPW-2	9/1/06 8:25	433.96	SWPW-1	10/15/06 9:25	467.13
SWPW-2	9/1/06 8:30	433.95	SWPW-1	10/15/06 9:30	467.13
SWPW-2	9/1/06 8:35	433.96	SWPW-1	10/15/06 9:35	467.12
SWPW-2	9/1/06 8:40	433.95	SWPW-1	10/15/06 9:40	467.12
SWPW-2	9/1/06 8:45	433.96	SWPW-1	10/15/06 9:45	467.11
SWPW-2	9/1/06 8:50	433.96	SWPW-1	10/15/06 9:50	467.11
SWPW-2	9/1/06 8:55	434.00	SWPW-1	10/15/06 9:55	467.10
SWPW-2	9/1/06 9:00	433.95	SWPW-1	10/15/06 10:00	467.10
SWPW-2	9/1/06 9:05	433.97	SWPW-1	10/15/06 10:05	467.13
SWPW-2	9/1/06 9:10	433.97	SWPW-1	10/15/06 10:10	467.10
SWPW-2	9/1/06 9:15	433.93	SWPW-1	10/15/06 10:15	467.09

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/1/06 9:20	433.98	SWPW-1	10/15/06 10:20	467.08
SWPW-2	9/1/06 9:25	433.97	SWPW-1	10/15/06 10:25	467.08
SWPW-2	9/1/06 9:30	433.98	SWPW-1	10/15/06 10:30	467.08
SWPW-2	9/1/06 9:35	433.96	SWPW-1	10/15/06 10:35	467.07
SWPW-2	9/1/06 9:40	433.97	SWPW-1	10/15/06 10:40	467.04
SWPW-2	9/1/06 9:45	433.97	SWPW-1	10/15/06 10:45	467.06
SWPW-2	9/1/06 9:50	433.97	SWPW-1	10/15/06 10:50	467.07
SWPW-2	9/1/06 9:55	433.98	SWPW-1	10/15/06 10:55	467.09
SWPW-2	9/1/06 10:00	433.98	SWPW-1	10/15/06 11:00	467.06
SWPW-2	9/1/06 10:05	433.97	SWPW-1	10/15/06 11:05	467.06
SWPW-2	9/1/06 10:10	433.98	SWPW-1	10/15/06 11:10	467.05
SWPW-2	9/1/06 10:15	433.98	SWPW-1	10/15/06 11:15	467.03
SWPW-2	9/1/06 10:20	433.98	SWPW-1	10/15/06 11:20	467.04
SWPW-2	9/1/06 10:25	433.97	SWPW-1	10/15/06 11:25	467.02
SWPW-2	9/1/06 10:30	433.97	SWPW-1	10/15/06 11:30	467.02
SWPW-2	9/1/06 10:35	433.97	SWPW-1	10/15/06 11:35	467.03
SWPW-2	9/1/06 10:40	433.96	SWPW-1	10/15/06 11:40	467.02
SWPW-2	9/1/06 10:45	433.97	SWPW-1	10/15/06 11:45	467.02
SWPW-2	9/1/06 10:50	433.96	SWPW-1	10/15/06 11:50	467.01
SWPW-2	9/1/06 10:55	433.97	SWPW-1	10/15/06 11:55	467.01
SWPW-2	9/1/06 11:00	433.98	SWPW-1	10/15/06 12:00	467.00
SWPW-2	9/1/06 11:05	433.94	SWPW-1	10/15/06 12:05	466.99
SWPW-2	9/1/06 11:10	433.97	SWPW-1	10/15/06 12:10	467.00
SWPW-2	9/1/06 11:15	433.98	SWPW-1	10/15/06 12:15	466.99
SWPW-2	9/1/06 11:20	433.98	SWPW-1	10/15/06 12:20	466.99
SWPW-2	9/1/06 11:25	433.97	SWPW-1	10/15/06 12:25	466.99
SWPW-2	9/1/06 11:30	433.97	SWPW-1	10/15/06 12:30	466.99
SWPW-2	9/1/06 11:35	433.97	SWPW-1	10/15/06 12:35	466.97
SWPW-2	9/1/06 11:40	433.98	SWPW-1	10/15/06 12:40	466.97
SWPW-2	9/1/06 11:45	433.98	SWPW-1	10/15/06 12:45	466.96
SWPW-2	9/1/06 11:50	433.99	SWPW-1	10/15/06 12:50	466.96
SWPW-2	9/1/06 11:55	433.98	SWPW-1	10/15/06 12:55	466.95
SWPW-2	9/1/06 12:00	433.98	SWPW-1	10/15/06 13:00	466.95
SWPW-2	9/1/06 12:05	433.98	SWPW-1	10/15/06 13:05	466.95
SWPW-2	9/1/06 12:10	433.95	SWPW-1	10/15/06 13:10	466.93
SWPW-2	9/1/06 12:15	433.95	SWPW-1	10/15/06 13:15	466.93
SWPW-2	9/1/06 12:20	433.98	SWPW-1	10/15/06 13:20	466.93
SWPW-2	9/1/06 12:25	433.97	SWPW-1	10/15/06 13:25	466.92
SWPW-2	9/1/06 12:30	433.98	SWPW-1	10/15/06 13:30	466.92
SWPW-2	9/1/06 12:35	433.94	SWPW-1	10/15/06 13:35	466.90
SWPW-2	9/1/06 12:40	433.94	SWPW-1	10/15/06 13:40	466.91
SWPW-2	9/1/06 12:45	433.95	SWPW-1	10/15/06 13:45	466.90
SWPW-2	9/1/06 12:50	433.96	SWPW-1	10/15/06 13:50	466.90
SWPW-2	9/1/06 12:55	433.98	SWPW-1	10/15/06 13:55	466.90
SWPW-2	9/1/06 13:00	433.98	SWPW-1	10/15/06 14:00	466.89
SWPW-2	9/1/06 13:05	433.97	SWPW-1	10/15/06 14:05	466.85
SWPW-2	9/1/06 13:10	433.93	SWPW-1	10/15/06 14:10	466.88
SWPW-2	9/1/06 13:15	433.94	SWPW-1	10/15/06 14:15	466.89
SWPW-2	9/1/06 13:20	433.97	SWPW-1	10/15/06 14:20	466.88
SWPW-2	9/1/06 13:25	433.98	SWPW-1	10/15/06 14:25	466.88
SWPW-2	9/1/06 13:30	433.93	SWPW-1	10/15/06 14:30	466.86
SWPW-2	9/1/06 13:35	433.98	SWPW-1	10/15/06 14:35	466.86
SWPW-2	9/1/06 13:40	433.97	SWPW-1	10/15/06 14:40	466.85
SWPW-2	9/1/06 13:45	433.96	SWPW-1	10/15/06 14:45	466.86
SWPW-2	9/1/06 13:50	433.97	SWPW-1	10/15/06 14:50	466.84
SWPW-2	9/1/06 13:55	433.96	SWPW-1	10/15/06 14:55	466.83
SWPW-2	9/1/06 14:00	433.97	SWPW-1	10/15/06 15:00	466.84
SWPW-2	9/1/06 14:05	433.96	SWPW-1	10/15/06 15:05	466.83
SWPW-2	9/1/06 14:10	433.96	SWPW-1	10/15/06 15:10	466.83
SWPW-2	9/1/06 14:15	433.96	SWPW-1	10/15/06 15:15	466.84
SWPW-2	9/1/06 14:20	433.96	SWPW-1	10/15/06 15:20	466.83
SWPW-2	9/1/06 14:25	433.93	SWPW-1	10/15/06 15:25	466.82
SWPW-2	9/1/06 14:30	433.97	SWPW-1	10/15/06 15:30	466.81
SWPW-2	9/1/06 14:35	433.97	SWPW-1	10/15/06 15:35	466.82
SWPW-2	9/1/06 14:40	433.97	SWPW-1	10/15/06 15:40	466.82
SWPW-2	9/1/06 14:45	433.96	SWPW-1	10/15/06 15:45	466.81
SWPW-2	9/1/06 14:50	433.96	SWPW-1	10/15/06 15:50	466.80
SWPW-2	9/1/06 14:55	433.96	SWPW-1	10/15/06 15:55	466.79
SWPW-2	9/1/06 15:00	433.95	SWPW-1	10/15/06 16:00	466.79
SWPW-2	9/1/06 15:05	433.96	SWPW-1	10/15/06 16:05	466.79
SWPW-2	9/1/06 15:10	433.95	SWPW-1	10/15/06 16:10	466.79
SWPW-2	9/1/06 15:15	433.95	SWPW-1	10/15/06 16:15	466.79
SWPW-2	9/1/06 15:20	433.95	SWPW-1	10/15/06 16:20	466.78
SWPW-2	9/1/06 15:25	433.96	SWPW-1	10/15/06 16:25	466.78
SWPW-2	9/1/06 15:30	433.96	SWPW-1	10/15/06 16:30	466.78
SWPW-2	9/1/06 15:35	433.96	SWPW-1	10/15/06 16:35	466.77
SWPW-2	9/1/06 15:40	433.95	SWPW-1	10/15/06 16:40	466.78
SWPW-2	9/1/06 15:45	433.94	SWPW-1	10/15/06 16:45	466.77
SWPW-2	9/1/06 15:50	433.94	SWPW-1	10/15/06 16:50	466.77
SWPW-2	9/1/06 15:55	433.94	SWPW-1	10/15/06 16:55	466.76
SWPW-2	9/1/06 16:00	433.94	SWPW-1	10/15/06 17:00	466.76
SWPW-2	9/1/06 16:05	433.94	SWPW-1	10/15/06 17:05	466.76
SWPW-2	9/1/06 16:10	433.95	SWPW-1	10/15/06 17:10	466.76
SWPW-2	9/1/06 16:15	433.96	SWPW-1	10/15/06 17:15	466.75
SWPW-2	9/1/06 16:20	433.95	SWPW-1	10/15/06 17:20	466.74
SWPW-2	9/1/06 16:25	433.92	SWPW-1	10/15/06 17:25	466.73
SWPW-2	9/1/06 16:30	433.92	SWPW-1	10/15/06 17:30	466.75
SWPW-2	9/1/06 16:35	433.95	SWPW-1	10/15/06 17:35	466.72
SWPW-2	9/1/06 16:40	433.94	SWPW-1	10/15/06 17:40	466.73
SWPW-2	9/1/06 16:45	433.95	SWPW-1	10/15/06 17:45	466.71
SWPW-2	9/1/06 16:50	433.94	SWPW-1	10/15/06 17:50	466.71
SWPW-2	9/1/06 16:55	433.95	SWPW-1	10/15/06 17:55	466.72
SWPW-2	9/1/06 17:00	433.94	SWPW-1	10/15/06 18:00	466.71
SWPW-2	9/1/06 17:05	433.95	SWPW-1	10/15/06 18:05	466.70
SWPW-2	9/1/06 17:10	433.94	SWPW-1	10/15/06 18:10	466.69
SWPW-2	9/1/06 17:15	433.93	SWPW-1	10/15/06 18:15	466.70
SWPW-2	9/1/06 17:20	433.93	SWPW-1	10/15/06 18:20	466.69
SWPW-2	9/1/06 17:25	433.94	SWPW-1	10/15/06 18:25	466.69
SWPW-2	9/1/06 17:30	433.93	SWPW-1	10/15/06 18:30	466.68
SWPW-2	9/1/06 17:35	433.94	SWPW-1	10/15/06 18:35	466.68

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/1/06 17:40	433.94	SWPW-1	10/15/06 18:40	466.68
SWPW-2	9/1/06 17:45	433.90	SWPW-1	10/15/06 18:45	466.69
SWPW-2	9/1/06 17:50	433.90	SWPW-1	10/15/06 18:50	466.71
SWPW-2	9/1/06 17:55	433.95	SWPW-1	10/15/06 18:55	466.68
SWPW-2	9/1/06 18:00	433.93	SWPW-1	10/15/06 19:00	466.67
SWPW-2	9/1/06 18:05	433.93	SWPW-1	10/15/06 19:05	466.68
SWPW-2	9/1/06 18:10	433.94	SWPW-1	10/15/06 19:10	466.66
SWPW-2	9/1/06 18:15	433.93	SWPW-1	10/15/06 19:15	466.67
SWPW-2	9/1/06 18:20	433.94	SWPW-1	10/15/06 19:20	466.66
SWPW-2	9/1/06 18:25	433.94	SWPW-1	10/15/06 19:25	466.67
SWPW-2	9/1/06 18:30	433.92	SWPW-1	10/15/06 19:30	466.65
SWPW-2	9/1/06 18:35	433.93	SWPW-1	10/15/06 19:35	466.65
SWPW-2	9/1/06 18:40	433.93	SWPW-1	10/15/06 19:40	466.63
SWPW-2	9/1/06 18:45	433.94	SWPW-1	10/15/06 19:45	466.65
SWPW-2	9/1/06 18:50	433.93	SWPW-1	10/15/06 19:50	466.65
SWPW-2	9/1/06 18:55	433.94	SWPW-1	10/15/06 19:55	466.64
SWPW-2	9/1/06 19:00	433.93	SWPW-1	10/15/06 20:00	466.64
SWPW-2	9/1/06 19:05	433.95	SWPW-1	10/15/06 20:05	466.63
SWPW-2	9/1/06 19:10	433.93	SWPW-1	10/15/06 20:10	466.63
SWPW-2	9/1/06 19:15	433.93	SWPW-1	10/15/06 20:15	466.62
SWPW-2	9/1/06 19:20	433.95	SWPW-1	10/15/06 20:20	466.62
SWPW-2	9/1/06 19:25	433.95	SWPW-1	10/15/06 20:25	466.62
SWPW-2	9/1/06 19:30	433.92	SWPW-1	10/15/06 20:30	466.61
SWPW-2	9/1/06 19:35	433.95	SWPW-1	10/15/06 20:35	466.61
SWPW-2	9/1/06 19:40	433.93	SWPW-1	10/15/06 20:40	466.62
SWPW-2	9/1/06 19:45	433.91	SWPW-1	10/15/06 20:45	466.62
SWPW-2	9/1/06 19:50	433.92	SWPW-1	10/15/06 20:50	466.62
SWPW-2	9/1/06 19:55	433.92	SWPW-1	10/15/06 20:55	466.59
SWPW-2	9/1/06 20:00	433.93	SWPW-1	10/15/06 21:00	466.58
SWPW-2	9/1/06 20:05	433.94	SWPW-1	10/15/06 21:05	466.58
SWPW-2	9/1/06 20:10	433.93	SWPW-1	10/15/06 21:10	466.59
SWPW-2	9/1/06 20:15	433.95	SWPW-1	10/15/06 21:15	466.60
SWPW-2	9/1/06 20:20	433.93	SWPW-1	10/15/06 21:20	466.59
SWPW-2	9/1/06 20:25	433.93	SWPW-1	10/15/06 21:25	466.58
SWPW-2	9/1/06 20:30	433.93	SWPW-1	10/15/06 21:30	466.58
SWPW-2	9/1/06 20:35	433.94	SWPW-1	10/15/06 21:35	466.58
SWPW-2	9/1/06 20:40	433.94	SWPW-1	10/15/06 21:40	466.57
SWPW-2	9/1/06 20:45	433.97	SWPW-1	10/15/06 21:45	466.56
SWPW-2	9/1/06 20:50	433.93	SWPW-1	10/15/06 21:50	466.56
SWPW-2	9/1/06 20:55	433.94	SWPW-1	10/15/06 21:55	466.56
SWPW-2	9/1/06 21:00	433.94	SWPW-1	10/15/06 22:00	466.57
SWPW-2	9/1/06 21:05	433.98	SWPW-1	10/15/06 22:05	466.56
SWPW-2	9/1/06 21:10	433.95	SWPW-1	10/15/06 22:10	466.56
SWPW-2	9/1/06 21:15	433.93	SWPW-1	10/15/06 22:15	466.55
SWPW-2	9/1/06 21:20	433.95	SWPW-1	10/15/06 22:20	466.55
SWPW-2	9/1/06 21:25	433.94	SWPW-1	10/15/06 22:25	466.56
SWPW-2	9/1/06 21:30	433.94	SWPW-1	10/15/06 22:30	466.55
SWPW-2	9/1/06 21:35	433.94	SWPW-1	10/15/06 22:35	466.54
SWPW-2	9/1/06 21:40	433.93	SWPW-1	10/15/06 22:40	466.53
SWPW-2	9/1/06 21:45	433.93	SWPW-1	10/15/06 22:45	466.51
SWPW-2	9/1/06 21:50	433.94	SWPW-1	10/15/06 22:50	466.53
SWPW-2	9/1/06 21:55	433.94	SWPW-1	10/15/06 22:55	466.52
SWPW-2	9/1/06 22:00	433.93	SWPW-1	10/15/06 23:00	466.51
SWPW-2	9/1/06 22:05	433.93	SWPW-1	10/15/06 23:05	466.53
SWPW-2	9/1/06 22:10	433.94	SWPW-1	10/15/06 23:10	466.52
SWPW-2	9/1/06 22:15	433.93	SWPW-1	10/15/06 23:15	466.48
SWPW-2	9/1/06 22:20	433.93	SWPW-1	10/15/06 23:20	466.48
SWPW-2	9/1/06 22:25	433.93	SWPW-1	10/15/06 23:25	466.50
SWPW-2	9/1/06 22:30	433.97	SWPW-1	10/15/06 23:30	466.50
SWPW-2	9/1/06 22:35	433.96	SWPW-1	10/15/06 23:35	466.49
SWPW-2	9/1/06 22:40	433.94	SWPW-1	10/15/06 23:40	466.48
SWPW-2	9/1/06 22:45	433.93	SWPW-1	10/15/06 23:45	466.48
SWPW-2	9/1/06 22:50	433.94	SWPW-1	10/15/06 23:50	466.48
SWPW-2	9/1/06 22:55	433.94	SWPW-1	10/15/06 23:55	466.47
SWPW-2	9/1/06 23:00	433.97	SWPW-1	10/16/06 0:00	466.47
SWPW-2	9/1/06 23:05	433.98	SWPW-1	10/16/06 0:05	466.47
SWPW-2	9/1/06 23:10	433.93	SWPW-1	10/16/06 0:10	466.48
SWPW-2	9/1/06 23:15	433.97	SWPW-1	10/16/06 0:15	466.47
SWPW-2	9/1/06 23:20	433.94	SWPW-1	10/16/06 0:20	466.46
SWPW-2	9/1/06 23:25	433.97	SWPW-1	10/16/06 0:25	466.45
SWPW-2	9/1/06 23:30	433.92	SWPW-1	10/16/06 0:30	466.46
SWPW-2	9/1/06 23:35	433.92	SWPW-1	10/16/06 0:35	466.45
SWPW-2	9/1/06 23:40	433.97	SWPW-1	10/16/06 0:40	466.45
SWPW-2	9/1/06 23:45	433.92	SWPW-1	10/16/06 0:45	466.44
SWPW-2	9/1/06 23:50	433.96	SWPW-1	10/16/06 0:50	466.44
SWPW-2	9/1/06 23:55	433.97	SWPW-1	10/16/06 0:55	466.44
SWPW-2	9/2/06 0:00	433.93	SWPW-1	10/16/06 1:00	466.44
SWPW-2	9/2/06 0:05	433.97	SWPW-1	10/16/06 1:05	466.43
SWPW-2	9/2/06 0:10	433.93	SWPW-1	10/16/06 1:10	466.42
SWPW-2	9/2/06 0:15	433.93	SWPW-1	10/16/06 1:15	466.43
SWPW-2	9/2/06 0:20	433.93	SWPW-1	10/16/06 1:20	466.42
SWPW-2	9/2/06 0:25	433.93	SWPW-1	10/16/06 1:25	466.42
SWPW-2	9/2/06 0:30	433.92	SWPW-1	10/16/06 1:30	466.41
SWPW-2	9/2/06 0:35	433.92	SWPW-1	10/16/06 1:35	466.42
SWPW-2	9/2/06 0:40	433.92	SWPW-1	10/16/06 1:40	466.38
SWPW-2	9/2/06 0:45	433.92	SWPW-1	10/16/06 1:45	466.41
SWPW-2	9/2/06 0:50	433.93	SWPW-1	10/16/06 1:50	466.41
SWPW-2	9/2/06 0:55	433.95	SWPW-1	10/16/06 1:55	466.37
SWPW-2	9/2/06 1:00	433.96	SWPW-1	10/16/06 2:00	466.40
SWPW-2	9/2/06 1:05	433.95	SWPW-1	10/16/06 2:05	466.39
SWPW-2	9/2/06 1:10	433.92	SWPW-1	10/16/06 2:10	466.39
SWPW-2	9/2/06 1:15	433.96	SWPW-1	10/16/06 2:15	466.39
SWPW-2	9/2/06 1:20	433.92	SWPW-1	10/16/06 2:20	466.39
SWPW-2	9/2/06 1:25	433.92	SWPW-1	10/16/06 2:25	466.38
SWPW-2	9/2/06 1:30	433.92	SWPW-1	10/16/06 2:30	466.37
SWPW-2	9/2/06 1:35	433.92	SWPW-1	10/16/06 2:35	466.37
SWPW-2	9/2/06 1:40	433.92	SWPW-1	10/16/06 2:40	466.38
SWPW-2	9/2/06 1:45	433.97	SWPW-1	10/16/06 2:45	466.36
SWPW-2	9/2/06 1:50	433.93	SWPW-1	10/16/06 2:50	466.37
SWPW-2	9/2/06 1:55	433.94	SWPW-1	10/16/06 2:55	466.37

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/2/06 2:00	433.93	SWPW-1	10/16/06 3:00	466.36
SWPW-2	9/2/06 2:05	433.94	SWPW-1	10/16/06 3:05	466.37
SWPW-2	9/2/06 2:10	433.94	SWPW-1	10/16/06 3:10	466.36
SWPW-2	9/2/06 2:15	433.93	SWPW-1	10/16/06 3:15	466.35
SWPW-2	9/2/06 2:20	433.94	SWPW-1	10/16/06 3:20	466.35
SWPW-2	9/2/06 2:25	433.94	SWPW-1	10/16/06 3:25	466.35
SWPW-2	9/2/06 2:30	433.93	SWPW-1	10/16/06 3:30	466.35
SWPW-2	9/2/06 2:35	433.94	SWPW-1	10/16/06 3:35	466.35
SWPW-2	9/2/06 2:40	433.93	SWPW-1	10/16/06 3:40	466.34
SWPW-2	9/2/06 2:45	433.94	SWPW-1	10/16/06 3:45	466.35
SWPW-2	9/2/06 2:50	433.97	SWPW-1	10/16/06 3:50	466.33
SWPW-2	9/2/06 2:55	433.94	SWPW-1	10/16/06 3:55	466.34
SWPW-2	9/2/06 3:00	433.92	SWPW-1	10/16/06 4:00	466.34
SWPW-2	9/2/06 3:05	433.94	SWPW-1	10/16/06 4:05	466.33
SWPW-2	9/2/06 3:10	433.95	SWPW-1	10/16/06 4:10	466.33
SWPW-2	9/2/06 3:15	433.95	SWPW-1	10/16/06 4:15	466.32
SWPW-2	9/2/06 3:20	433.91	SWPW-1	10/16/06 4:20	466.33
SWPW-2	9/2/06 3:25	433.94	SWPW-1	10/16/06 4:25	466.32
SWPW-2	9/2/06 3:30	433.95	SWPW-1	10/16/06 4:30	466.32
SWPW-2	9/2/06 3:35	433.95	SWPW-1	10/16/06 4:35	466.31
SWPW-2	9/2/06 3:40	433.93	SWPW-1	10/16/06 4:40	466.32
SWPW-2	9/2/06 3:45	433.92	SWPW-1	10/16/06 4:45	466.31
SWPW-2	9/2/06 3:50	433.93	SWPW-1	10/16/06 4:50	466.30
SWPW-2	9/2/06 3:55	433.94	SWPW-1	10/16/06 4:55	466.31
SWPW-2	9/2/06 4:00	433.94	SWPW-1	10/16/06 5:00	466.30
SWPW-2	9/2/06 4:05	433.94	SWPW-1	10/16/06 5:05	466.31
SWPW-2	9/2/06 4:10	433.94	SWPW-1	10/16/06 5:10	466.30
SWPW-2	9/2/06 4:15	433.93	SWPW-1	10/16/06 5:15	466.29
SWPW-2	9/2/06 4:20	433.94	SWPW-1	10/16/06 5:20	466.29
SWPW-2	9/2/06 4:25	433.93	SWPW-1	10/16/06 5:25	466.30
SWPW-2	9/2/06 4:30	433.94	SWPW-1	10/16/06 5:30	466.28
SWPW-2	9/2/06 4:35	433.94	SWPW-1	10/16/06 5:35	466.29
SWPW-2	9/2/06 4:40	433.94	SWPW-1	10/16/06 5:40	466.28
SWPW-2	9/2/06 4:45	433.94	SWPW-1	10/16/06 5:45	466.29
SWPW-2	9/2/06 4:50	433.92	SWPW-1	10/16/06 5:50	466.28
SWPW-2	9/2/06 4:55	433.93	SWPW-1	10/16/06 5:55	466.28
SWPW-2	9/2/06 5:00	433.93	SWPW-1	10/16/06 6:00	466.28
SWPW-2	9/2/06 5:05	433.93	SWPW-1	10/16/06 6:05	466.27
SWPW-2	9/2/06 5:10	433.97	SWPW-1	10/16/06 6:10	466.27
SWPW-2	9/2/06 5:15	433.93	SWPW-1	10/16/06 6:15	466.26
SWPW-2	9/2/06 5:20	433.94	SWPW-1	10/16/06 6:20	466.26
SWPW-2	9/2/06 5:25	433.93	SWPW-1	10/16/06 6:25	466.26
SWPW-2	9/2/06 5:30	433.94	SWPW-1	10/16/06 6:30	466.28
SWPW-2	9/2/06 5:35	433.94	SWPW-1	10/16/06 6:35	466.23
SWPW-2	9/2/06 5:40	433.93	SWPW-1	10/16/06 6:40	466.26
SWPW-2	9/2/06 5:45	433.92	SWPW-1	10/16/06 6:45	466.25
SWPW-2	9/2/06 5:50	433.97	SWPW-1	10/16/06 6:50	466.24
SWPW-2	9/2/06 5:55	433.92	SWPW-1	10/16/06 6:55	466.25
SWPW-2	9/2/06 6:00	433.94	SWPW-1	10/16/06 7:00	466.25
SWPW-2	9/2/06 6:05	433.97	SWPW-1	10/16/06 7:05	466.24
SWPW-2	9/2/06 6:10	433.93	SWPW-1	10/16/06 7:10	466.25
SWPW-2	9/2/06 6:15	433.93	SWPW-1	10/16/06 7:15	466.24
SWPW-2	9/2/06 6:20	433.93	SWPW-1	10/16/06 7:20	466.24
SWPW-2	9/2/06 6:25	433.93	SWPW-1	10/16/06 7:25	466.24
SWPW-2	9/2/06 6:30	433.94	SWPW-1	10/16/06 7:30	466.24
SWPW-2	9/2/06 6:35	433.95	SWPW-1	10/16/06 7:35	466.23
SWPW-2	9/2/06 6:40	433.94	SWPW-1	10/16/06 7:40	466.26
SWPW-2	9/2/06 6:45	433.94	SWPW-1	10/16/06 7:45	466.22
SWPW-2	9/2/06 6:50	433.94	SWPW-1	10/16/06 7:50	466.23
SWPW-2	9/2/06 6:55	433.94	SWPW-1	10/16/06 7:55	466.23
SWPW-2	9/2/06 7:00	433.96	SWPW-1	10/16/06 8:00	466.22
SWPW-2	9/2/06 7:05	433.94	SWPW-1	10/16/06 8:05	466.22
SWPW-2	9/2/06 7:10	433.95	SWPW-1	10/16/06 8:10	466.22
SWPW-2	9/2/06 7:15	433.94	SWPW-1	10/16/06 8:15	466.23
SWPW-2	9/2/06 7:20	433.95	SWPW-1	10/16/06 8:20	466.22
SWPW-2	9/2/06 7:25	433.94	SWPW-1	10/16/06 8:25	466.23
SWPW-2	9/2/06 7:30	433.94	SWPW-1	10/16/06 8:30	466.21
SWPW-2	9/2/06 7:35	433.95	SWPW-1	10/16/06 8:35	466.22
SWPW-2	9/2/06 7:40	433.94	SWPW-1	10/16/06 8:40	466.21
SWPW-2	9/2/06 7:45	433.94	SWPW-1	10/16/06 8:45	466.21
SWPW-2	9/2/06 7:50	433.95	SWPW-1	10/16/06 8:50	466.22
SWPW-2	9/2/06 7:55	433.95	SWPW-1	10/16/06 8:55	466.21
SWPW-2	9/2/06 8:00	433.95	SWPW-1	10/16/06 9:00	466.21
SWPW-2	9/2/06 8:05	433.95	SWPW-1	10/16/06 9:05	466.20
SWPW-2	9/2/06 8:10	433.95	SWPW-1	10/16/06 9:10	466.21
SWPW-2	9/2/06 8:15	433.97	SWPW-1	10/16/06 9:15	466.20
SWPW-2	9/2/06 8:20	433.96	SWPW-1	10/16/06 9:20	466.21
SWPW-2	9/2/06 8:25	433.95	SWPW-1	10/16/06 9:25	466.23
SWPW-2	9/2/06 8:30	433.97	SWPW-1	10/16/06 9:30	466.23
SWPW-2	9/2/06 8:35	433.97	SWPW-1	10/16/06 9:35	466.20
SWPW-2	9/2/06 8:40	433.97	SWPW-1	10/16/06 9:40	466.18
SWPW-2	9/2/06 8:45	433.97	SWPW-1	10/16/06 9:45	466.20
SWPW-2	9/2/06 8:50	433.97	SWPW-1	10/16/06 9:50	466.18
SWPW-2	9/2/06 8:55	433.93	SWPW-1	10/16/06 9:55	466.18
SWPW-2	9/2/06 9:00	433.94	SWPW-1	10/16/06 10:00	466.17
SWPW-2	9/2/06 9:05	433.97	SWPW-1	10/16/06 10:05	466.18
SWPW-2	9/2/06 9:10	433.95	SWPW-1	10/16/06 10:10	466.16
SWPW-2	9/2/06 9:15	433.93	SWPW-1	10/16/06 10:15	466.17
SWPW-2	9/2/06 9:20	433.94	SWPW-1	10/16/06 10:20	466.18
SWPW-2	9/2/06 9:25	433.98	SWPW-1	10/16/06 10:25	466.17
SWPW-2	9/2/06 9:30	433.94	SWPW-1	10/16/06 10:30	466.15
SWPW-2	9/2/06 9:35	433.95	SWPW-1	10/16/06 10:35	466.15
SWPW-2	9/2/06 9:40	433.94	SWPW-1	10/16/06 10:40	466.15
SWPW-2	9/2/06 9:45	433.94	SWPW-1	10/16/06 10:45	466.15
SWPW-2	9/2/06 9:50	433.97	SWPW-1	10/16/06 10:50	466.14
SWPW-2	9/2/06 9:55	433.96	SWPW-1	10/16/06 10:55	466.14
SWPW-2	9/2/06 10:00	433.94	SWPW-1	10/16/06 11:00	466.13
SWPW-2	9/2/06 10:05	433.92	SWPW-1	10/16/06 11:05	466.14
SWPW-2	9/2/06 10:10	433.97	SWPW-1	10/16/06 11:10	466.14
SWPW-2	9/2/06 10:15	433.93	SWPW-1	10/16/06 11:15	466.14

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/2/06 10:20	433.93	SWPW-1	10/16/06 11:20	466.13
SWPW-2	9/2/06 10:25	433.95	SWPW-1	10/16/06 11:25	466.11
SWPW-2	9/2/06 10:30	433.95	SWPW-1	10/16/06 11:30	466.13
SWPW-2	9/2/06 10:35	433.96	SWPW-1	10/16/06 11:35	466.11
SWPW-2	9/2/06 10:40	433.96	SWPW-1	10/16/06 11:40	466.11
SWPW-2	9/2/06 10:45	433.93	SWPW-1	10/16/06 11:45	466.10
SWPW-2	9/2/06 10:50	433.93	SWPW-1	10/16/06 11:50	466.11
SWPW-2	9/2/06 10:55	433.93	SWPW-1	10/16/06 11:55	466.11
SWPW-2	9/2/06 11:00	433.92	SWPW-1	10/16/06 12:00	466.11
SWPW-2	9/2/06 11:05	433.92	SWPW-1	10/16/06 12:05	466.09
SWPW-2	9/2/06 11:10	433.95	SWPW-1	10/16/06 12:10	466.09
SWPW-2	9/2/06 11:15	433.95	SWPW-1	10/16/06 12:15	466.09
SWPW-2	9/2/06 11:20	433.95	SWPW-1	10/16/06 12:20	466.05
SWPW-2	9/2/06 11:25	433.95	SWPW-1	10/16/06 12:25	466.09
SWPW-2	9/2/06 11:30	433.95	SWPW-1	10/16/06 12:30	466.07
SWPW-2	9/2/06 11:35	433.94	SWPW-1	10/16/06 12:35	466.07
SWPW-2	9/2/06 11:40	433.94	SWPW-1	10/16/06 12:40	466.06
SWPW-2	9/2/06 11:45	433.93	SWPW-1	10/16/06 12:45	466.07
SWPW-2	9/2/06 11:50	433.92	SWPW-1	10/16/06 12:50	466.04
SWPW-2	9/2/06 11:55	433.93	SWPW-1	10/16/06 12:55	466.06
SWPW-2	9/2/06 12:00	433.93	SWPW-1	10/16/06 13:00	466.06
SWPW-2	9/2/06 12:05	433.93	SWPW-1	10/16/06 13:05	466.06
SWPW-2	9/2/06 12:10	433.93	SWPW-1	10/16/06 13:10	466.05
SWPW-2	9/2/06 12:15	433.93	SWPW-1	10/16/06 13:15	466.05
SWPW-2	9/2/06 12:20	433.95	SWPW-1	10/16/06 13:20	466.04
SWPW-2	9/2/06 12:25	433.94	SWPW-1	10/16/06 13:25	466.03
SWPW-2	9/2/06 12:30	433.89	SWPW-1	10/16/06 13:30	466.03
SWPW-2	9/2/06 12:35	433.89	SWPW-1	10/16/06 13:35	466.03
SWPW-2	9/2/06 12:40	433.90	SWPW-1	10/16/06 13:40	466.03
SWPW-2	9/2/06 12:45	433.88	SWPW-1	10/16/06 13:45	466.03
SWPW-2	9/2/06 12:50	433.91	SWPW-1	10/16/06 13:50	466.02
SWPW-2	9/2/06 12:55	433.92	SWPW-1	10/16/06 13:55	466.02
SWPW-2	9/2/06 13:00	433.91	SWPW-1	10/16/06 14:00	466.02
SWPW-2	9/2/06 13:05	433.92	SWPW-1	10/16/06 14:05	466.03
SWPW-2	9/2/06 13:10	433.92	SWPW-1	10/16/06 14:10	466.01
SWPW-2	9/2/06 13:15	433.93	SWPW-1	10/16/06 14:15	466.00
SWPW-2	9/2/06 13:20	433.93	SWPW-1	10/16/06 14:20	466.01
SWPW-2	9/2/06 13:25	433.87	SWPW-1	10/16/06 14:25	465.99
SWPW-2	9/2/06 13:30	433.91	SWPW-1	10/16/06 14:30	465.98
SWPW-2	9/2/06 13:35	433.92	SWPW-1	10/16/06 14:35	466.03
SWPW-2	9/2/06 13:40	433.91	SWPW-1	10/16/06 14:40	465.98
SWPW-2	9/2/06 13:45	433.90	SWPW-1	10/16/06 14:45	465.99
SWPW-2	9/2/06 13:50	433.91	SWPW-1	10/16/06 14:50	466.01
SWPW-2	9/2/06 13:55	433.87	SWPW-1	10/16/06 14:55	465.98
SWPW-2	9/2/06 14:00	433.90	SWPW-1	10/16/06 15:00	466.00
SWPW-2	9/2/06 14:05	433.90	SWPW-1	10/16/06 15:05	465.97
SWPW-2	9/2/06 14:10	433.90	SWPW-1	10/16/06 15:10	465.97
SWPW-2	9/2/06 14:15	433.89	SWPW-1	10/16/06 15:15	465.97
SWPW-2	9/2/06 14:20	433.88	SWPW-1	10/16/06 15:20	465.96
SWPW-2	9/2/06 14:25	433.88	SWPW-1	10/16/06 15:25	465.95
SWPW-2	9/2/06 14:30	433.88	SWPW-1	10/16/06 15:30	465.97
SWPW-2	9/2/06 14:35	433.88	SWPW-1	10/16/06 15:35	465.95
SWPW-2	9/2/06 14:40	433.87	SWPW-1	10/16/06 15:40	465.95
SWPW-2	9/2/06 14:45	433.88	SWPW-1	10/16/06 15:45	465.95
SWPW-2	9/2/06 14:50	433.87	SWPW-1	10/16/06 15:50	465.95
SWPW-2	9/2/06 14:55	433.89	SWPW-1	10/16/06 15:55	465.95
SWPW-2	9/2/06 15:00	433.89	SWPW-1	10/16/06 16:00	465.94
SWPW-2	9/2/06 15:05	433.90	SWPW-1	10/16/06 16:05	465.95
SWPW-2	9/2/06 15:10	433.89	SWPW-1	10/16/06 16:10	465.94
SWPW-2	9/2/06 15:15	433.85	SWPW-1	10/16/06 16:15	465.94
SWPW-2	9/2/06 15:20	433.88	SWPW-1	10/16/06 16:20	465.94
SWPW-2	9/2/06 15:25	433.88	SWPW-1	10/16/06 16:25	465.94
SWPW-2	9/2/06 15:30	433.87	SWPW-1	10/16/06 16:30	465.93
SWPW-2	9/2/06 15:35	433.87	SWPW-1	10/16/06 16:35	465.96
SWPW-2	9/2/06 15:40	433.88	SWPW-1	10/16/06 16:40	465.92
SWPW-2	9/2/06 15:45	433.89	SWPW-1	10/16/06 16:45	465.94
SWPW-2	9/2/06 15:50	433.88	SWPW-1	10/16/06 16:50	465.93
SWPW-2	9/2/06 15:55	433.88	SWPW-1	10/16/06 16:55	465.92
SWPW-2	9/2/06 16:00	433.86	SWPW-1	10/16/06 17:00	465.92
SWPW-2	9/2/06 16:05	433.86	SWPW-1	10/16/06 17:05	465.93
SWPW-2	9/2/06 16:10	433.87	SWPW-1	10/16/06 17:10	465.95
SWPW-2	9/2/06 16:15	433.85	SWPW-1	10/16/06 17:15	465.92
SWPW-2	9/2/06 16:20	433.88	SWPW-1	10/16/06 17:20	465.93
SWPW-2	9/2/06 16:25	433.86	SWPW-1	10/16/06 17:25	465.92
SWPW-2	9/2/06 16:30	433.85	SWPW-1	10/16/06 17:30	465.92
SWPW-2	9/2/06 16:35	433.84	SWPW-1	10/16/06 17:35	465.91
SWPW-2	9/2/06 16:40	433.84	SWPW-1	10/16/06 17:40	465.92
SWPW-2	9/2/06 16:45	433.85	SWPW-1	10/16/06 17:45	465.91
SWPW-2	9/2/06 16:50	433.84	SWPW-1	10/16/06 17:50	465.91
SWPW-2	9/2/06 16:55	433.85	SWPW-1	10/16/06 17:55	465.94
SWPW-2	9/2/06 17:00	433.85	SWPW-1	10/16/06 18:00	465.91
SWPW-2	9/2/06 17:05	433.84	SWPW-1	10/16/06 18:05	465.91
SWPW-2	9/2/06 17:10	433.85	SWPW-1	10/16/06 18:10	465.92
SWPW-2	9/2/06 17:15	433.85	SWPW-1	10/16/06 18:15	465.91
SWPW-2	9/2/06 17:20	433.85	SWPW-1	10/16/06 18:20	465.88
SWPW-2	9/2/06 17:25	433.86	SWPW-1	10/16/06 18:25	465.90
SWPW-2	9/2/06 17:30	433.85	SWPW-1	10/16/06 18:30	465.93
SWPW-2	9/2/06 17:35	433.86	SWPW-1	10/16/06 18:35	465.91
SWPW-2	9/2/06 17:40	433.85	SWPW-1	10/16/06 18:40	465.91
SWPW-2	9/2/06 17:45	433.85	SWPW-1	10/16/06 18:45	465.91
SWPW-2	9/2/06 17:50	433.84	SWPW-1	10/16/06 18:50	465.90
SWPW-2	9/2/06 17:55	433.87	SWPW-1	10/16/06 18:55	465.91
SWPW-2	9/2/06 18:00	433.85	SWPW-1	10/16/06 19:00	465.92
SWPW-2	9/2/06 18:05	433.84	SWPW-1	10/16/06 19:05	465.91
SWPW-2	9/2/06 18:10	433.85	SWPW-1	10/16/06 19:10	465.90
SWPW-2	9/2/06 18:15	433.85	SWPW-1	10/16/06 19:15	465.90
SWPW-2	9/2/06 18:20	433.87	SWPW-1	10/16/06 19:20	465.91
SWPW-2	9/2/06 18:25	433.87	SWPW-1	10/16/06 19:25	465.90
SWPW-2	9/2/06 18:30	433.85	SWPW-1	10/16/06 19:30	465.91
SWPW-2	9/2/06 18:35	433.84	SWPW-1	10/16/06 19:35	465.90

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/2/06 18:40	433.81	SWPW-1	10/16/06 19:40	465.90
SWPW-2	9/2/06 18:45	433.82	SWPW-1	10/16/06 19:45	465.93
SWPW-2	9/2/06 18:50	433.86	SWPW-1	10/16/06 19:50	465.89
SWPW-2	9/2/06 18:55	433.82	SWPW-1	10/16/06 19:55	465.90
SWPW-2	9/2/06 19:00	433.84	SWPW-1	10/16/06 20:00	465.91
SWPW-2	9/2/06 19:05	433.84	SWPW-1	10/16/06 20:05	465.90
SWPW-2	9/2/06 19:10	433.85	SWPW-1	10/16/06 20:10	465.90
SWPW-2	9/2/06 19:15	433.84	SWPW-1	10/16/06 20:15	465.90
SWPW-2	9/2/06 19:20	433.87	SWPW-1	10/16/06 20:20	465.90
SWPW-2	9/2/06 19:25	433.82	SWPW-1	10/16/06 20:25	465.91
SWPW-2	9/2/06 19:30	433.83	SWPW-1	10/16/06 20:30	465.90
SWPW-2	9/2/06 19:35	433.82	SWPW-1	10/16/06 20:35	465.90
SWPW-2	9/2/06 19:40	433.86	SWPW-1	10/16/06 20:40	465.89
SWPW-2	9/2/06 19:45	433.86	SWPW-1	10/16/06 20:45	465.91
SWPW-2	9/2/06 19:50	433.83	SWPW-1	10/16/06 20:50	465.90
SWPW-2	9/2/06 19:55	433.82	SWPW-1	10/16/06 20:55	465.90
SWPW-2	9/2/06 20:00	433.83	SWPW-1	10/16/06 21:00	465.89
SWPW-2	9/2/06 20:05	433.85	SWPW-1	10/16/06 21:05	465.90
SWPW-2	9/2/06 20:10	433.82	SWPW-1	10/16/06 21:10	465.89
SWPW-2	9/2/06 20:15	433.87	SWPW-1	10/16/06 21:15	465.90
SWPW-2	9/2/06 20:20	433.83	SWPW-1	10/16/06 21:20	465.89
SWPW-2	9/2/06 20:25	433.85	SWPW-1	10/16/06 21:25	465.91
SWPW-2	9/2/06 20:30	433.84	SWPW-1	10/16/06 21:30	465.89
SWPW-2	9/2/06 20:35	433.85	SWPW-1	10/16/06 21:35	465.89
SWPW-2	9/2/06 20:40	433.85	SWPW-1	10/16/06 21:40	465.90
SWPW-2	9/2/06 20:45	433.85	SWPW-1	10/16/06 21:45	465.89
SWPW-2	9/2/06 20:50	433.86	SWPW-1	10/16/06 21:50	465.90
SWPW-2	9/2/06 20:55	433.86	SWPW-1	10/16/06 21:55	465.90
SWPW-2	9/2/06 21:00	433.81	SWPW-1	10/16/06 22:00	465.89
SWPW-2	9/2/06 21:05	433.85	SWPW-1	10/16/06 22:05	465.89
SWPW-2	9/2/06 21:10	433.87	SWPW-1	10/16/06 22:10	465.92
SWPW-2	9/2/06 21:15	433.81	SWPW-1	10/16/06 22:15	465.89
SWPW-2	9/2/06 21:20	433.86	SWPW-1	10/16/06 22:20	465.88
SWPW-2	9/2/06 21:25	433.85	SWPW-1	10/16/06 22:25	465.89
SWPW-2	9/2/06 21:30	433.86	SWPW-1	10/16/06 22:30	465.88
SWPW-2	9/2/06 21:35	433.85	SWPW-1	10/16/06 22:35	465.88
SWPW-2	9/2/06 21:40	433.84	SWPW-1	10/16/06 22:40	465.87
SWPW-2	9/2/06 21:45	433.83	SWPW-1	10/16/06 22:45	465.88
SWPW-2	9/2/06 21:50	433.84	SWPW-1	10/16/06 22:50	465.88
SWPW-2	9/2/06 21:55	433.83	SWPW-1	10/16/06 22:55	465.88
SWPW-2	9/2/06 22:00	433.88	SWPW-1	10/16/06 23:00	465.87
SWPW-2	9/2/06 22:05	433.85	SWPW-1	10/16/06 23:05	465.87
SWPW-2	9/2/06 22:10	433.87	SWPW-1	10/16/06 23:10	465.87
SWPW-2	9/2/06 22:15	433.85	SWPW-1	10/16/06 23:15	465.87
SWPW-2	9/2/06 22:20	433.85	SWPW-1	10/16/06 23:20	465.87
SWPW-2	9/2/06 22:25	433.85	SWPW-1	10/16/06 23:25	465.87
SWPW-2	9/2/06 22:30	433.82	SWPW-1	10/16/06 23:30	465.89
SWPW-2	9/2/06 22:35	433.86	SWPW-1	10/16/06 23:35	465.88
SWPW-2	9/2/06 22:40	433.84	SWPW-1	10/16/06 23:40	465.86
SWPW-2	9/2/06 22:45	433.85	SWPW-1	10/16/06 23:45	465.88
SWPW-2	9/2/06 22:50	433.84	SWPW-1	10/16/06 23:50	465.87
SWPW-2	9/2/06 22:55	433.84	SWPW-1	10/16/06 23:55	465.88
SWPW-2	9/2/06 23:00	433.84	SWPW-1	10/17/06 0:00	465.90
SWPW-2	9/2/06 23:05	433.83	SWPW-1	10/17/06 0:05	465.87
SWPW-2	9/2/06 23:10	433.84	SWPW-1	10/17/06 0:10	465.86
SWPW-2	9/2/06 23:15	433.85	SWPW-1	10/17/06 0:15	465.87
SWPW-2	9/2/06 23:20	433.84	SWPW-1	10/17/06 0:20	465.86
SWPW-2	9/2/06 23:25	433.84	SWPW-1	10/17/06 0:25	465.90
SWPW-2	9/2/06 23:30	433.84	SWPW-1	10/17/06 0:30	465.87
SWPW-2	9/2/06 23:35	433.83	SWPW-1	10/17/06 0:35	465.87
SWPW-2	9/2/06 23:40	433.84	SWPW-1	10/17/06 0:40	465.86
SWPW-2	9/2/06 23:45	433.84	SWPW-1	10/17/06 0:45	465.86
SWPW-2	9/2/06 23:50	433.83	SWPW-1	10/17/06 0:50	465.88
SWPW-2	9/2/06 23:55	433.84	SWPW-1	10/17/06 0:55	465.88
SWPW-2	9/3/06 0:00	433.84	SWPW-1	10/17/06 1:00	465.90
SWPW-2	9/3/06 0:05	433.83	SWPW-1	10/17/06 1:05	465.84
SWPW-2	9/3/06 0:10	433.82	SWPW-1	10/17/06 1:10	465.86
SWPW-2	9/3/06 0:15	433.86	SWPW-1	10/17/06 1:15	465.86
SWPW-2	9/3/06 0:20	433.84	SWPW-1	10/17/06 1:20	465.84
SWPW-2	9/3/06 0:25	433.84	SWPW-1	10/17/06 1:25	465.86
SWPW-2	9/3/06 0:30	433.85	SWPW-1	10/17/06 1:30	465.85
SWPW-2	9/3/06 0:35	433.81	SWPW-1	10/17/06 1:35	465.84
SWPW-2	9/3/06 0:40	433.85	SWPW-1	10/17/06 1:40	465.84
SWPW-2	9/3/06 0:45	433.85	SWPW-1	10/17/06 1:45	465.86
SWPW-2	9/3/06 0:50	433.85	SWPW-1	10/17/06 1:50	465.83
SWPW-2	9/3/06 0:55	433.85	SWPW-1	10/17/06 1:55	465.87
SWPW-2	9/3/06 1:00	433.85	SWPW-1	10/17/06 2:00	465.83
SWPW-2	9/3/06 1:05	433.84	SWPW-1	10/17/06 2:05	465.84
SWPW-2	9/3/06 1:10	433.86	SWPW-1	10/17/06 2:10	465.82
SWPW-2	9/3/06 1:15	433.81	SWPW-1	10/17/06 2:15	465.85
SWPW-2	9/3/06 1:20	433.85	SWPW-1	10/17/06 2:20	465.83
SWPW-2	9/3/06 1:25	433.85	SWPW-1	10/17/06 2:25	465.82
SWPW-2	9/3/06 1:30	433.84	SWPW-1	10/17/06 2:30	465.82
SWPW-2	9/3/06 1:35	433.85	SWPW-1	10/17/06 2:35	465.81
SWPW-2	9/3/06 1:40	433.84	SWPW-1	10/17/06 2:40	465.81
SWPW-2	9/3/06 1:45	433.83	SWPW-1	10/17/06 2:45	465.81
SWPW-2	9/3/06 1:50	433.83	SWPW-1	10/17/06 2:50	465.82
SWPW-2	9/3/06 1:55	433.83	SWPW-1	10/17/06 2:55	465.82
SWPW-2	9/3/06 2:00	433.82	SWPW-1	10/17/06 3:00	465.82
SWPW-2	9/3/06 2:05	433.82	SWPW-1	10/17/06 3:05	465.81
SWPW-2	9/3/06 2:10	433.82	SWPW-1	10/17/06 3:10	465.84
SWPW-2	9/3/06 2:15	433.82	SWPW-1	10/17/06 3:15	465.82
SWPW-2	9/3/06 2:20	433.85	SWPW-1	10/17/06 3:20	465.85
SWPW-2	9/3/06 2:25	433.82	SWPW-1	10/17/06 3:25	465.84
SWPW-2	9/3/06 2:30	433.83	SWPW-1	10/17/06 3:30	465.81
SWPW-2	9/3/06 2:35	433.82	SWPW-1	10/17/06 3:35	465.82
SWPW-2	9/3/06 2:40	433.82	SWPW-1	10/17/06 3:40	465.81
SWPW-2	9/3/06 2:45	433.83	SWPW-1	10/17/06 3:45	465.82
SWPW-2	9/3/06 2:50	433.85	SWPW-1	10/17/06 3:50	465.81
SWPW-2	9/3/06 2:55	433.86	SWPW-1	10/17/06 3:55	465.81

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/3/06 3:00	433.83	SWPW-1	10/17/06 4:00	465.82
SWPW-2	9/3/06 3:05	433.82	SWPW-1	10/17/06 4:05	465.78
SWPW-2	9/3/06 3:10	433.82	SWPW-1	10/17/06 4:10	465.80
SWPW-2	9/3/06 3:15	433.85	SWPW-1	10/17/06 4:15	465.82
SWPW-2	9/3/06 3:20	433.86	SWPW-1	10/17/06 4:20	465.78
SWPW-2	9/3/06 3:25	433.82	SWPW-1	10/17/06 4:25	465.79
SWPW-2	9/3/06 3:30	433.83	SWPW-1	10/17/06 4:30	465.79
SWPW-2	9/3/06 3:35	433.81	SWPW-1	10/17/06 4:35	465.79
SWPW-2	9/3/06 3:40	433.82	SWPW-1	10/17/06 4:40	465.80
SWPW-2	9/3/06 3:45	433.82	SWPW-1	10/17/06 4:45	465.78
SWPW-2	9/3/06 3:50	433.83	SWPW-1	10/17/06 4:50	465.79
SWPW-2	9/3/06 3:55	433.82	SWPW-1	10/17/06 4:55	465.82
SWPW-2	9/3/06 4:00	433.82	SWPW-1	10/17/06 5:00	465.78
SWPW-2	9/3/06 4:05	433.83	SWPW-1	10/17/06 5:05	465.79
SWPW-2	9/3/06 4:10	433.84	SWPW-1	10/17/06 5:10	465.78
SWPW-2	9/3/06 4:15	433.84	SWPW-1	10/17/06 5:15	465.77
SWPW-2	9/3/06 4:20	433.84	SWPW-1	10/17/06 5:20	465.78
SWPW-2	9/3/06 4:25	433.81	SWPW-1	10/17/06 5:25	465.78
SWPW-2	9/3/06 4:30	433.81	SWPW-1	10/17/06 5:30	465.78
SWPW-2	9/3/06 4:35	433.82	SWPW-1	10/17/06 5:35	465.81
SWPW-2	9/3/06 4:40	433.80	SWPW-1	10/17/06 5:40	465.80
SWPW-2	9/3/06 4:45	433.84	SWPW-1	10/17/06 5:45	465.77
SWPW-2	9/3/06 4:50	433.80	SWPW-1	10/17/06 5:50	465.80
SWPW-2	9/3/06 4:55	433.83	SWPW-1	10/17/06 5:55	465.77
SWPW-2	9/3/06 5:00	433.83	SWPW-1	10/17/06 6:00	465.77
SWPW-2	9/3/06 5:05	433.85	SWPW-1	10/17/06 6:05	465.77
SWPW-2	9/3/06 5:10	433.83	SWPW-1	10/17/06 6:10	465.77
SWPW-2	9/3/06 5:15	433.84	SWPW-1	10/17/06 6:15	465.80
SWPW-2	9/3/06 5:20	433.84	SWPW-1	10/17/06 6:20	465.79
SWPW-2	9/3/06 5:25	433.83	SWPW-1	10/17/06 6:25	465.80
SWPW-2	9/3/06 5:30	433.83	SWPW-1	10/17/06 6:30	465.76
SWPW-2	9/3/06 5:35	433.84	SWPW-1	10/17/06 6:35	465.76
SWPW-2	9/3/06 5:40	433.85	SWPW-1	10/17/06 6:40	465.77
SWPW-2	9/3/06 5:45	433.82	SWPW-1	10/17/06 6:45	465.76
SWPW-2	9/3/06 5:50	433.85	SWPW-1	10/17/06 6:50	465.80
SWPW-2	9/3/06 5:55	433.86	SWPW-1	10/17/06 6:55	465.76
SWPW-2	9/3/06 6:00	433.85	SWPW-1	10/17/06 7:00	465.76
SWPW-2	9/3/06 6:05	433.85	SWPW-1	10/17/06 7:05	465.77
SWPW-2	9/3/06 6:10	433.85	SWPW-1	10/17/06 7:10	465.79
SWPW-2	9/3/06 6:15	433.85	SWPW-1	10/17/06 7:15	465.76
SWPW-2	9/3/06 6:20	433.85	SWPW-1	10/17/06 7:20	465.75
SWPW-2	9/3/06 6:25	433.84	SWPW-1	10/17/06 7:25	465.75
SWPW-2	9/3/06 6:30	433.86	SWPW-1	10/17/06 7:30	465.75
SWPW-2	9/3/06 6:35	433.86	SWPW-1	10/17/06 7:35	465.75
SWPW-2	9/3/06 6:40	433.86	SWPW-1	10/17/06 7:40	465.75
SWPW-2	9/3/06 6:45	433.85	SWPW-1	10/17/06 7:45	465.74
SWPW-2	9/3/06 6:50	433.84	SWPW-1	10/17/06 7:50	465.75
SWPW-2	9/3/06 6:55	433.85	SWPW-1	10/17/06 7:55	465.75
SWPW-2	9/3/06 7:00	433.86	SWPW-1	10/17/06 8:00	465.75
SWPW-2	9/3/06 7:05	433.86	SWPW-1	10/17/06 8:05	465.77
SWPW-2	9/3/06 7:10	433.87	SWPW-1	10/17/06 8:10	465.79
SWPW-2	9/3/06 7:15	433.87	SWPW-1	10/17/06 8:15	465.79
SWPW-2	9/3/06 7:20	433.86	SWPW-1	10/17/06 8:20	465.75
SWPW-2	9/3/06 7:25	433.84	SWPW-1	10/17/06 8:25	465.76
SWPW-2	9/3/06 7:30	433.84	SWPW-1	10/17/06 8:30	465.75
SWPW-2	9/3/06 7:35	433.87	SWPW-1	10/17/06 8:35	465.74
SWPW-2	9/3/06 7:40	433.87	SWPW-1	10/17/06 8:40	465.76
SWPW-2	9/3/06 7:45	433.88	SWPW-1	10/17/06 8:45	465.74
SWPW-2	9/3/06 7:50	433.86	SWPW-1	10/17/06 8:50	465.74
SWPW-2	9/3/06 7:55	433.87	SWPW-1	10/17/06 8:55	465.74
SWPW-2	9/3/06 8:00	433.87	SWPW-1	10/17/06 9:00	465.74
SWPW-2	9/3/06 8:05	433.87	SWPW-1	10/17/06 9:05	465.74
SWPW-2	9/3/06 8:10	433.86	SWPW-1	10/17/06 9:10	465.73
SWPW-2	9/3/06 8:15	433.87	SWPW-1	10/17/06 9:15	465.74
SWPW-2	9/3/06 8:20	433.87	SWPW-1	10/17/06 9:20	465.74
SWPW-2	9/3/06 8:25	433.86	SWPW-1	10/17/06 9:25	465.78
SWPW-2	9/3/06 8:30	433.88	SWPW-1	10/17/06 9:30	465.74
SWPW-2	9/3/06 8:35	433.87	SWPW-1	10/17/06 9:35	465.74
SWPW-2	9/3/06 8:40	433.87	SWPW-1	10/17/06 9:40	465.74
SWPW-2	9/3/06 8:45	433.87	SWPW-1	10/17/06 9:45	465.74
SWPW-2	9/3/06 8:50	433.87	SWPW-1	10/17/06 9:50	465.73
SWPW-2	9/3/06 8:55	433.88	SWPW-1	10/17/06 9:55	465.73
SWPW-2	9/3/06 9:00	433.88	SWPW-1	10/17/06 10:00	465.73
SWPW-2	9/3/06 9:05	433.85	SWPW-1	10/17/06 10:05	465.73
SWPW-2	9/3/06 9:10	433.86	SWPW-1	10/17/06 10:10	465.72
SWPW-2	9/3/06 9:15	433.86	SWPW-1	10/17/06 10:15	465.72
SWPW-2	9/3/06 9:20	433.85	SWPW-1	10/17/06 10:20	465.72
SWPW-2	9/3/06 9:25	433.89	SWPW-1	10/17/06 10:25	465.71
SWPW-2	9/3/06 9:30	433.89	SWPW-1	10/17/06 10:30	465.74
SWPW-2	9/3/06 9:35	433.89	SWPW-1	10/17/06 10:35	465.74
SWPW-2	9/3/06 9:40	433.86	SWPW-1	10/17/06 10:40	465.71
SWPW-2	9/3/06 9:45	433.87	SWPW-1	10/17/06 10:45	465.72
SWPW-2	9/3/06 9:50	433.86	SWPW-1	10/17/06 10:50	465.71
SWPW-2	9/3/06 9:55	433.87	SWPW-1	10/17/06 10:55	465.73
SWPW-2	9/3/06 10:00	433.87	SWPW-1	10/17/06 11:00	465.71
SWPW-2	9/3/06 10:05	433.91	SWPW-1	10/17/06 11:05	465.73
SWPW-2	9/3/06 10:10	433.86	SWPW-1	10/17/06 11:10	465.71
SWPW-2	9/3/06 10:15	433.89	SWPW-1	10/17/06 11:15	465.71
SWPW-2	9/3/06 10:20	433.85	SWPW-1	10/17/06 11:20	465.74
SWPW-2	9/3/06 10:25	433.89	SWPW-1	10/17/06 11:25	465.73
SWPW-2	9/3/06 10:30	433.86	SWPW-1	10/17/06 11:30	465.71
SWPW-2	9/3/06 10:35	433.86	SWPW-1	10/17/06 11:35	465.70
SWPW-2	9/3/06 10:40	433.87	SWPW-1	10/17/06 11:40	465.74
SWPW-2	9/3/06 10:45	433.91	SWPW-1	10/17/06 11:45	465.70
SWPW-2	9/3/06 10:50	433.86	SWPW-1	10/17/06 11:50	465.73
SWPW-2	9/3/06 10:55	433.85	SWPW-1	10/17/06 11:55	465.70
SWPW-2	9/3/06 11:00	433.86	SWPW-1	10/17/06 12:00	465.69
SWPW-2	9/3/06 11:05	433.91	SWPW-1	10/17/06 12:05	465.69
SWPW-2	9/3/06 11:10	433.89	SWPW-1	10/17/06 12:10	465.69
SWPW-2	9/3/06 11:15	433.89	SWPW-1	10/17/06 12:15	465.68

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/3/06 11:20	433.85	SWPW-1	10/17/06 12:20	465.71
SWPW-2	9/3/06 11:25	433.90	SWPW-1	10/17/06 12:25	465.68
SWPW-2	9/3/06 11:30	433.88	SWPW-1	10/17/06 12:30	465.67
SWPW-2	9/3/06 11:35	433.86	SWPW-1	10/17/06 12:35	465.68
SWPW-2	9/3/06 11:40	433.87	SWPW-1	10/17/06 12:40	465.71
SWPW-2	9/3/06 11:45	433.88	SWPW-1	10/17/06 12:45	465.71
SWPW-2	9/3/06 11:50	433.87	SWPW-1	10/17/06 12:50	465.68
SWPW-2	9/3/06 11:55	433.86	SWPW-1	10/17/06 12:55	465.70
SWPW-2	9/3/06 12:00	433.88	SWPW-1	10/17/06 13:00	465.67
SWPW-2	9/3/06 12:05	433.87	SWPW-1	10/17/06 13:05	465.66
SWPW-2	9/3/06 12:10	433.83	SWPW-1	10/17/06 13:10	465.65
SWPW-2	9/3/06 12:15	433.86	SWPW-1	10/17/06 13:15	465.66
SWPW-2	9/3/06 12:20	433.87	SWPW-1	10/17/06 13:20	465.65
SWPW-2	9/3/06 12:25	433.87	SWPW-1	10/17/06 13:25	465.65
SWPW-2	9/3/06 12:30	433.87	SWPW-1	10/17/06 13:30	465.67
SWPW-2	9/3/06 12:35	433.83	SWPW-1	10/17/06 13:35	465.64
SWPW-2	9/3/06 12:40	433.84	SWPW-1	10/17/06 13:40	465.64
SWPW-2	9/3/06 12:45	433.86	SWPW-1	10/17/06 13:45	465.64
SWPW-2	9/3/06 12:50	433.86	SWPW-1	10/17/06 13:50	465.65
SWPW-2	9/3/06 12:55	433.82	SWPW-1	10/17/06 13:55	465.64
SWPW-2	9/3/06 13:00	433.86	SWPW-1	10/17/06 14:00	465.63
SWPW-2	9/3/06 13:05	433.81	SWPW-1	10/17/06 14:05	465.63
SWPW-2	9/3/06 13:10	433.85	SWPW-1	10/17/06 14:10	465.63
SWPW-2	9/3/06 13:15	433.84	SWPW-1	10/17/06 14:15	465.63
SWPW-2	9/3/06 13:20	433.85	SWPW-1	10/17/06 14:20	465.63
SWPW-2	9/3/06 13:25	433.84	SWPW-1	10/17/06 14:25	465.67
SWPW-2	9/3/06 13:30	433.86	SWPW-1	10/17/06 14:30	465.66
SWPW-2	9/3/06 13:35	433.84	SWPW-1	10/17/06 14:35	465.62
SWPW-2	9/3/06 13:40	433.83	SWPW-1	10/17/06 14:40	465.63
SWPW-2	9/3/06 13:45	433.84	SWPW-1	10/17/06 14:45	465.62
SWPW-2	9/3/06 13:50	433.85	SWPW-1	10/17/06 14:50	465.61
SWPW-2	9/3/06 13:55	433.83	SWPW-1	10/17/06 14:55	465.62
SWPW-2	9/3/06 14:00	433.83	SWPW-1	10/17/06 15:00	465.62
SWPW-2	9/3/06 14:05	433.81	SWPW-1	10/17/06 15:05	465.62
SWPW-2	9/3/06 14:10	433.82	SWPW-1	10/17/06 15:10	465.61
SWPW-2	9/3/06 14:15	433.82	SWPW-1	10/17/06 15:15	465.61
SWPW-2	9/3/06 14:20	433.81	SWPW-1	10/17/06 15:20	465.61
SWPW-2	9/3/06 14:25	433.82	SWPW-1	10/17/06 15:25	465.60
SWPW-2	9/3/06 14:30	433.81	SWPW-1	10/17/06 15:30	465.64
SWPW-2	9/3/06 14:35	433.81	SWPW-1	10/17/06 15:35	465.61
SWPW-2	9/3/06 14:40	433.82	SWPW-1	10/17/06 15:40	465.62
SWPW-2	9/3/06 14:45	433.80	SWPW-1	10/17/06 15:45	465.61
SWPW-2	9/3/06 14:50	433.82	SWPW-1	10/17/06 15:50	465.59
SWPW-2	9/3/06 14:55	433.82	SWPW-1	10/17/06 15:55	465.59
SWPW-2	9/3/06 15:00	433.81	SWPW-1	10/17/06 16:00	465.60
SWPW-2	9/3/06 15:05	433.80	SWPW-1	10/17/06 16:05	465.60
SWPW-2	9/3/06 15:10	433.84	SWPW-1	10/17/06 16:10	465.62
SWPW-2	9/3/06 15:15	433.81	SWPW-1	10/17/06 16:15	465.59
SWPW-2	9/3/06 15:20	433.81	SWPW-1	10/17/06 16:20	465.59
SWPW-2	9/3/06 15:25	433.81	SWPW-1	10/17/06 16:25	465.60
SWPW-2	9/3/06 15:30	433.80	SWPW-1	10/17/06 16:30	465.59
SWPW-2	9/3/06 15:35	433.79	SWPW-1	10/17/06 16:35	465.59
SWPW-2	9/3/06 15:40	433.83	SWPW-1	10/17/06 16:40	465.60
SWPW-2	9/3/06 15:45	433.79	SWPW-1	10/17/06 16:45	465.60
SWPW-2	9/3/06 15:50	433.78	SWPW-1	10/17/06 16:50	465.60
SWPW-2	9/3/06 15:55	433.79	SWPW-1	10/17/06 16:55	465.61
SWPW-2	9/3/06 16:00	433.80	SWPW-1	10/17/06 17:00	465.62
SWPW-2	9/3/06 16:05	433.79	SWPW-1	10/17/06 17:05	465.58
SWPW-2	9/3/06 16:10	433.81	SWPW-1	10/17/06 17:10	465.59
SWPW-2	9/3/06 16:15	433.82	SWPW-1	10/17/06 17:15	465.58
SWPW-2	9/3/06 16:20	433.78	SWPW-1	10/17/06 17:20	465.62
SWPW-2	9/3/06 16:25	433.79	SWPW-1	10/17/06 17:25	465.61
SWPW-2	9/3/06 16:30	433.78	SWPW-1	10/17/06 17:30	465.58
SWPW-2	9/3/06 16:35	433.78	SWPW-1	10/17/06 17:35	465.58
SWPW-2	9/3/06 16:40	433.77	SWPW-1	10/17/06 17:40	465.58
SWPW-2	9/3/06 16:45	433.78	SWPW-1	10/17/06 17:45	465.58
SWPW-2	9/3/06 16:50	433.81	SWPW-1	10/17/06 17:50	465.57
SWPW-2	9/3/06 16:55	433.81	SWPW-1	10/17/06 17:55	465.58
SWPW-2	9/3/06 17:00	433.81	SWPW-1	10/17/06 18:00	465.62
SWPW-2	9/3/06 17:05	433.78	SWPW-1	10/17/06 18:05	465.58
SWPW-2	9/3/06 17:10	433.81	SWPW-1	10/17/06 18:10	465.58
SWPW-2	9/3/06 17:15	433.82	SWPW-1	10/17/06 18:15	465.61
SWPW-2	9/3/06 17:20	433.81	SWPW-1	10/17/06 18:20	465.61
SWPW-2	9/3/06 17:25	433.78	SWPW-1	10/17/06 18:25	465.57
SWPW-2	9/3/06 17:30	433.81	SWPW-1	10/17/06 18:30	465.57
SWPW-2	9/3/06 17:35	433.80	SWPW-1	10/17/06 18:35	465.57
SWPW-2	9/3/06 17:40	433.80	SWPW-1	10/17/06 18:40	465.61
SWPW-2	9/3/06 17:45	433.77	SWPW-1	10/17/06 18:45	465.61
SWPW-2	9/3/06 17:50	433.80	SWPW-1	10/17/06 18:50	465.60
SWPW-2	9/3/06 17:55	433.81	SWPW-1	10/17/06 18:55	465.60
SWPW-2	9/3/06 18:00	433.79	SWPW-1	10/17/06 19:00	465.59
SWPW-2	9/3/06 18:05	433.79	SWPW-1	10/17/06 19:05	465.61
SWPW-2	9/3/06 18:10	433.80	SWPW-1	10/17/06 19:10	465.60
SWPW-2	9/3/06 18:15	433.78	SWPW-1	10/17/06 19:15	465.61
SWPW-2	9/3/06 18:20	433.77	SWPW-1	10/17/06 19:20	465.61
SWPW-2	9/3/06 18:25	433.77	SWPW-1	10/17/06 19:25	465.61
SWPW-2	9/3/06 18:30	433.81	SWPW-1	10/17/06 19:30	465.61
SWPW-2	9/3/06 18:35	433.78	SWPW-1	10/17/06 19:35	465.58
SWPW-2	9/3/06 18:40	433.77	SWPW-1	10/17/06 19:40	465.57
SWPW-2	9/3/06 18:45	433.79	SWPW-1	10/17/06 19:45	465.56
SWPW-2	9/3/06 18:50	433.77	SWPW-1	10/17/06 19:50	465.56
SWPW-2	9/3/06 18:55	433.81	SWPW-1	10/17/06 19:55	465.56
SWPW-2	9/3/06 19:00	433.76	SWPW-1	10/17/06 20:00	465.56
SWPW-2	9/3/06 19:05	433.81	SWPW-1	10/17/06 20:05	465.57
SWPW-2	9/3/06 19:10	433.77	SWPW-1	10/17/06 20:10	465.60
SWPW-2	9/3/06 19:15	433.80	SWPW-1	10/17/06 20:15	465.56
SWPW-2	9/3/06 19:20	433.82	SWPW-1	10/17/06 20:20	465.59
SWPW-2	9/3/06 19:25	433.80	SWPW-1	10/17/06 20:25	465.57
SWPW-2	9/3/06 19:30	433.79	SWPW-1	10/17/06 20:30	465.56
SWPW-2	9/3/06 19:35	433.78	SWPW-1	10/17/06 20:35	465.59

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/3/06 19:40	433.79	SWPW-1	10/17/06 20:40	465.56
SWPW-2	9/3/06 19:45	433.79	SWPW-1	10/17/06 20:45	465.56
SWPW-2	9/3/06 19:50	433.80	SWPW-1	10/17/06 20:50	465.59
SWPW-2	9/3/06 19:55	433.80	SWPW-1	10/17/06 20:55	465.60
SWPW-2	9/3/06 20:00	433.83	SWPW-1	10/17/06 21:00	465.59
SWPW-2	9/3/06 20:05	433.82	SWPW-1	10/17/06 21:05	465.55
SWPW-2	9/3/06 20:10	433.83	SWPW-1	10/17/06 21:10	465.59
SWPW-2	9/3/06 20:15	433.79	SWPW-1	10/17/06 21:15	465.58
SWPW-2	9/3/06 20:20	433.78	SWPW-1	10/17/06 21:20	465.56
SWPW-2	9/3/06 20:25	433.81	SWPW-1	10/17/06 21:25	465.58
SWPW-2	9/3/06 20:30	433.81	SWPW-1	10/17/06 21:30	465.55
SWPW-2	9/3/06 20:35	433.80	SWPW-1	10/17/06 21:35	465.56
SWPW-2	9/3/06 20:40	433.82	SWPW-1	10/17/06 21:40	465.55
SWPW-2	9/3/06 20:45	433.82	SWPW-1	10/17/06 21:45	465.59
SWPW-2	9/3/06 20:50	433.82	SWPW-1	10/17/06 21:50	465.55
SWPW-2	9/3/06 20:55	433.81	SWPW-1	10/17/06 21:55	465.55
SWPW-2	9/3/06 21:00	433.81	SWPW-1	10/17/06 22:00	465.55
SWPW-2	9/3/06 21:05	433.82	SWPW-1	10/17/06 22:05	465.55
SWPW-2	9/3/06 21:10	433.81	SWPW-1	10/17/06 22:10	465.55
SWPW-2	9/3/06 21:15	433.82	SWPW-1	10/17/06 22:15	465.57
SWPW-2	9/3/06 21:20	433.85	SWPW-1	10/17/06 22:20	465.56
SWPW-2	9/3/06 21:25	433.81	SWPW-1	10/17/06 22:25	465.54
SWPW-2	9/3/06 21:30	433.82	SWPW-1	10/17/06 22:30	465.58
SWPW-2	9/3/06 21:35	433.83	SWPW-1	10/17/06 22:35	465.58
SWPW-2	9/3/06 21:40	433.86	SWPW-1	10/17/06 22:40	465.54
SWPW-2	9/3/06 21:45	433.82	SWPW-1	10/17/06 22:45	465.58
SWPW-2	9/3/06 21:50	433.82	SWPW-1	10/17/06 22:50	465.54
SWPW-2	9/3/06 21:55	433.83	SWPW-1	10/17/06 22:55	465.54
SWPW-2	9/3/06 22:00	433.79	SWPW-1	10/17/06 23:00	465.58
SWPW-2	9/3/06 22:05	433.83	SWPW-1	10/17/06 23:05	465.58
SWPW-2	9/3/06 22:10	433.85	SWPW-1	10/17/06 23:10	465.57
SWPW-2	9/3/06 22:15	433.83	SWPW-1	10/17/06 23:15	465.57
SWPW-2	9/3/06 22:20	433.83	SWPW-1	10/17/06 23:20	465.58
SWPW-2	9/3/06 22:25	433.80	SWPW-1	10/17/06 23:25	465.58
SWPW-2	9/3/06 22:30	433.83	SWPW-1	10/17/06 23:30	465.53
SWPW-2	9/3/06 22:35	433.82	SWPW-1	10/17/06 23:35	465.57
SWPW-2	9/3/06 22:40	433.82	SWPW-1	10/17/06 23:40	465.53
SWPW-2	9/3/06 22:45	433.83	SWPW-1	10/17/06 23:45	465.53
SWPW-2	9/3/06 22:50	433.81	SWPW-1	10/17/06 23:50	465.57
SWPW-2	9/3/06 22:55	433.82	SWPW-1	10/17/06 23:55	465.53
SWPW-2	9/3/06 23:00	433.82	SWPW-1	10/18/06 0:00	465.56
SWPW-2	9/3/06 23:05	433.83	SWPW-1	10/18/06 0:05	465.56
SWPW-2	9/3/06 23:10	433.83	SWPW-1	10/18/06 0:10	465.53
SWPW-2	9/3/06 23:15	433.82	SWPW-1	10/18/06 0:15	465.52
SWPW-2	9/3/06 23:20	433.82	SWPW-1	10/18/06 0:20	465.55
SWPW-2	9/3/06 23:25	433.82	SWPW-1	10/18/06 0:25	465.55
SWPW-2	9/3/06 23:30	433.82	SWPW-1	10/18/06 0:30	465.51
SWPW-2	9/3/06 23:35	433.81	SWPW-1	10/18/06 0:35	465.53
SWPW-2	9/3/06 23:40	433.83	SWPW-1	10/18/06 0:40	465.54
SWPW-2	9/3/06 23:45	433.82	SWPW-1	10/18/06 0:45	465.54
SWPW-2	9/3/06 23:50	433.82	SWPW-1	10/18/06 0:50	465.54
SWPW-2	9/3/06 23:55	433.82	SWPW-1	10/18/06 0:55	465.54
SWPW-2	9/4/06 0:00	433.82	SWPW-1	10/18/06 1:00	465.49
SWPW-2	9/4/06 0:05	433.78	SWPW-1	10/18/06 1:05	465.50
SWPW-2	9/4/06 0:10	433.82	SWPW-1	10/18/06 1:10	465.52
SWPW-2	9/4/06 0:15	433.82	SWPW-1	10/18/06 1:15	465.50
SWPW-2	9/4/06 0:20	433.81	SWPW-1	10/18/06 1:20	465.50
SWPW-2	9/4/06 0:25	433.85	SWPW-1	10/18/06 1:25	465.49
SWPW-2	9/4/06 0:30	433.82	SWPW-1	10/18/06 1:30	465.50
SWPW-2	9/4/06 0:35	433.84	SWPW-1	10/18/06 1:35	465.51
SWPW-2	9/4/06 0:40	433.84	SWPW-1	10/18/06 1:40	465.52
SWPW-2	9/4/06 0:45	433.77	SWPW-1	10/18/06 1:45	465.53
SWPW-2	9/4/06 0:50	433.82	SWPW-1	10/18/06 1:50	465.49
SWPW-2	9/4/06 0:55	433.82	SWPW-1	10/18/06 1:55	465.51
SWPW-2	9/4/06 1:00	433.81	SWPW-1	10/18/06 2:00	465.48
SWPW-2	9/4/06 1:05	433.82	SWPW-1	10/18/06 2:05	465.48
SWPW-2	9/4/06 1:10	433.83	SWPW-1	10/18/06 2:10	465.48
SWPW-2	9/4/06 1:15	433.80	SWPW-1	10/18/06 2:15	465.47
SWPW-2	9/4/06 1:20	433.82	SWPW-1	10/18/06 2:20	465.47
SWPW-2	9/4/06 1:25	433.82	SWPW-1	10/18/06 2:25	465.50
SWPW-2	9/4/06 1:30	433.81	SWPW-1	10/18/06 2:30	465.50
SWPW-2	9/4/06 1:35	433.81	SWPW-1	10/18/06 2:35	465.46
SWPW-2	9/4/06 1:40	433.80	SWPW-1	10/18/06 2:40	465.47
SWPW-2	9/4/06 1:45	433.80	SWPW-1	10/18/06 2:45	465.47
SWPW-2	9/4/06 1:50	433.81	SWPW-1	10/18/06 2:50	465.46
SWPW-2	9/4/06 1:55	433.77	SWPW-1	10/18/06 2:55	465.50
SWPW-2	9/4/06 2:00	433.81	SWPW-1	10/18/06 3:00	465.49
SWPW-2	9/4/06 2:05	433.81	SWPW-1	10/18/06 3:05	465.49
SWPW-2	9/4/06 2:10	433.81	SWPW-1	10/18/06 3:10	465.48
SWPW-2	9/4/06 2:15	433.81	SWPW-1	10/18/06 3:15	465.49
SWPW-2	9/4/06 2:20	433.81	SWPW-1	10/18/06 3:20	465.44
SWPW-2	9/4/06 2:25	433.80	SWPW-1	10/18/06 3:25	465.45
SWPW-2	9/4/06 2:30	433.78	SWPW-1	10/18/06 3:30	465.47
SWPW-2	9/4/06 2:35	433.82	SWPW-1	10/18/06 3:35	465.48
SWPW-2	9/4/06 2:40	433.82	SWPW-1	10/18/06 3:40	465.48
SWPW-2	9/4/06 2:45	433.81	SWPW-1	10/18/06 3:45	465.44
SWPW-2	9/4/06 2:50	433.82	SWPW-1	10/18/06 3:50	465.44
SWPW-2	9/4/06 2:55	433.81	SWPW-1	10/18/06 3:55	465.48
SWPW-2	9/4/06 3:00	433.83	SWPW-1	10/18/06 4:00	465.46
SWPW-2	9/4/06 3:05	433.80	SWPW-1	10/18/06 4:05	465.47
SWPW-2	9/4/06 3:10	433.80	SWPW-1	10/18/06 4:10	465.43
SWPW-2	9/4/06 3:15	433.80	SWPW-1	10/18/06 4:15	465.45
SWPW-2	9/4/06 3:20	433.80	SWPW-1	10/18/06 4:20	465.45
SWPW-2	9/4/06 3:25	433.79	SWPW-1	10/18/06 4:25	465.46
SWPW-2	9/4/06 3:30	433.81	SWPW-1	10/18/06 4:30	465.42
SWPW-2	9/4/06 3:35	433.81	SWPW-1	10/18/06 4:35	465.45
SWPW-2	9/4/06 3:40	433.81	SWPW-1	10/18/06 4:40	465.45
SWPW-2	9/4/06 3:45	433.77	SWPW-1	10/18/06 4:45	465.42
SWPW-2	9/4/06 3:50	433.79	SWPW-1	10/18/06 4:50	465.41
SWPW-2	9/4/06 3:55	433.83	SWPW-1	10/18/06 4:55	465.44

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/4/06 4:00	433.80	SWPW-1	10/18/06 5:00	465.45
SWPW-2	9/4/06 4:05	433.80	SWPW-1	10/18/06 5:05	465.44
SWPW-2	9/4/06 4:10	433.81	SWPW-1	10/18/06 5:10	465.44
SWPW-2	9/4/06 4:15	433.81	SWPW-1	10/18/06 5:15	465.41
SWPW-2	9/4/06 4:20	433.82	SWPW-1	10/18/06 5:20	465.44
SWPW-2	9/4/06 4:25	433.80	SWPW-1	10/18/06 5:25	465.44
SWPW-2	9/4/06 4:30	433.81	SWPW-1	10/18/06 5:30	465.44
SWPW-2	9/4/06 4:35	433.81	SWPW-1	10/18/06 5:35	465.42
SWPW-2	9/4/06 4:40	433.84	SWPW-1	10/18/06 5:40	465.44
SWPW-2	9/4/06 4:45	433.80	SWPW-1	10/18/06 5:45	465.41
SWPW-2	9/4/06 4:50	433.79	SWPW-1	10/18/06 5:50	465.43
SWPW-2	9/4/06 4:55	433.79	SWPW-1	10/18/06 5:55	465.44
SWPW-2	9/4/06 5:00	433.81	SWPW-1	10/18/06 6:00	465.43
SWPW-2	9/4/06 5:05	433.81	SWPW-1	10/18/06 6:05	465.40
SWPW-2	9/4/06 5:10	433.81	SWPW-1	10/18/06 6:10	465.43
SWPW-2	9/4/06 5:15	433.80	SWPW-1	10/18/06 6:15	465.40
SWPW-2	9/4/06 5:20	433.81	SWPW-1	10/18/06 6:20	465.40
SWPW-2	9/4/06 5:25	433.81	SWPW-1	10/18/06 6:25	465.40
SWPW-2	9/4/06 5:30	433.81	SWPW-1	10/18/06 6:30	465.40
SWPW-2	9/4/06 5:35	433.80	SWPW-1	10/18/06 6:35	465.43
SWPW-2	9/4/06 5:40	433.80	SWPW-1	10/18/06 6:40	465.42
SWPW-2	9/4/06 5:45	433.80	SWPW-1	10/18/06 6:45	465.39
SWPW-2	9/4/06 5:50	433.84	SWPW-1	10/18/06 6:50	465.42
SWPW-2	9/4/06 5:55	433.83	SWPW-1	10/18/06 6:55	465.42
SWPW-2	9/4/06 6:00	433.83	SWPW-1	10/18/06 7:00	465.39
SWPW-2	9/4/06 6:05	433.80	SWPW-1	10/18/06 7:05	465.43
SWPW-2	9/4/06 6:10	433.80	SWPW-1	10/18/06 7:10	465.39
SWPW-2	9/4/06 6:15	433.83	SWPW-1	10/18/06 7:15	465.39
SWPW-2	9/4/06 6:20	433.84	SWPW-1	10/18/06 7:20	465.42
SWPW-2	9/4/06 6:25	433.85	SWPW-1	10/18/06 7:25	465.41
SWPW-2	9/4/06 6:30	433.85	SWPW-1	10/18/06 7:30	465.39
SWPW-2	9/4/06 6:35	433.81	SWPW-1	10/18/06 7:35	465.41
SWPW-2	9/4/06 6:40	433.80	SWPW-1	10/18/06 7:40	465.42
SWPW-2	9/4/06 6:45	433.86	SWPW-1	10/18/06 7:45	465.38
SWPW-2	9/4/06 6:50	433.82	SWPW-1	10/18/06 7:50	465.41
SWPW-2	9/4/06 6:55	433.82	SWPW-1	10/18/06 7:55	465.39
SWPW-2	9/4/06 7:00	433.83	SWPW-1	10/18/06 8:00	465.38
SWPW-2	9/4/06 7:05	433.84	SWPW-1	10/18/06 8:05	465.41
SWPW-2	9/4/06 7:10	433.83	SWPW-1	10/18/06 8:10	465.37
SWPW-2	9/4/06 7:15	433.83	SWPW-1	10/18/06 8:15	465.38
SWPW-2	9/4/06 7:20	433.84	SWPW-1	10/18/06 8:20	465.38
SWPW-2	9/4/06 7:25	433.85	SWPW-1	10/18/06 8:25	465.41
SWPW-2	9/4/06 7:30	433.86	SWPW-1	10/18/06 8:30	465.42
SWPW-2	9/4/06 7:35	433.85	SWPW-1	10/18/06 8:35	465.38
SWPW-2	9/4/06 7:40	433.85	SWPW-1	10/18/06 8:40	465.40
SWPW-2	9/4/06 7:45	433.81	SWPW-1	10/18/06 8:45	465.38
SWPW-2	9/4/06 7:50	433.84	SWPW-1	10/18/06 8:50	465.42
SWPW-2	9/4/06 7:55	433.86	SWPW-1	10/18/06 8:55	465.38
SWPW-2	9/4/06 8:00	433.84	SWPW-1	10/18/06 9:00	465.39
SWPW-2	9/4/06 8:05	433.84	SWPW-1	10/18/06 9:05	465.38
SWPW-2	9/4/06 8:10	433.84	SWPW-1	10/18/06 9:10	465.41
SWPW-2	9/4/06 8:15	433.86	SWPW-1	10/18/06 9:15	465.38
SWPW-2	9/4/06 8:20	433.87	SWPW-1	10/18/06 9:20	465.43
SWPW-2	9/4/06 8:25	433.82	SWPW-1	10/18/06 9:25	465.41
SWPW-2	9/4/06 8:30	433.85	SWPW-1	10/18/06 9:30	465.41
SWPW-2	9/4/06 8:35	433.86	SWPW-1	10/18/06 9:35	465.38
SWPW-2	9/4/06 8:40	433.86	SWPW-1	10/18/06 9:40	465.42
SWPW-2	9/4/06 8:45	433.85	SWPW-1	10/18/06 9:45	465.41
SWPW-2	9/4/06 8:50	433.85	SWPW-1	10/18/06 9:50	465.39
SWPW-2	9/4/06 8:55	433.86	SWPW-1	10/18/06 9:55	465.38
SWPW-2	9/4/06 9:00	433.87	SWPW-1	10/18/06 10:00	465.41
SWPW-2	9/4/06 9:05	433.82	SWPW-1	10/18/06 10:05	465.41
SWPW-2	9/4/06 9:10	433.87	SWPW-1	10/18/06 10:10	465.42
SWPW-2	9/4/06 9:15	433.85	SWPW-1	10/18/06 10:15	465.40
SWPW-2	9/4/06 9:20	433.85	SWPW-1	10/18/06 10:20	465.41
SWPW-2	9/4/06 9:25	433.86	SWPW-1	10/18/06 10:25	465.38
SWPW-2	9/4/06 9:30	433.89	SWPW-1	10/18/06 10:30	465.37
SWPW-2	9/4/06 9:35	433.86	SWPW-1	10/18/06 10:35	465.37
SWPW-2	9/4/06 9:40	433.88	SWPW-1	10/18/06 10:40	465.37
SWPW-2	9/4/06 9:45	433.90	SWPW-1	10/18/06 10:45	465.39
SWPW-2	9/4/06 9:50	433.86	SWPW-1	10/18/06 10:50	465.38
SWPW-2	9/4/06 9:55	433.86	SWPW-1	10/18/06 10:55	465.40
SWPW-2	9/4/06 10:00	433.86	SWPW-1	10/18/06 11:00	465.40
SWPW-2	9/4/06 10:05	433.86	SWPW-1	10/18/06 11:05	465.39
SWPW-2	9/4/06 10:10	433.88	SWPW-1	10/18/06 11:10	465.36
SWPW-2	9/4/06 10:15	433.89	SWPW-1	10/18/06 11:15	465.36
SWPW-2	9/4/06 10:20	433.90	SWPW-1	10/18/06 11:20	465.38
SWPW-2	9/4/06 10:25	433.87	SWPW-1	10/18/06 11:25	465.36
SWPW-2	9/4/06 10:30	433.87	SWPW-1	10/18/06 11:30	465.39
SWPW-2	9/4/06 10:35	433.87	SWPW-1	10/18/06 11:35	465.38
SWPW-2	9/4/06 10:40	433.87	SWPW-1	10/18/06 11:40	465.35
SWPW-2	9/4/06 10:45	433.87	SWPW-1	10/18/06 11:45	465.38
SWPW-2	9/4/06 10:50	433.88	SWPW-1	10/18/06 11:50	465.39
SWPW-2	9/4/06 10:55	433.88	SWPW-1	10/18/06 11:55	465.34
SWPW-2	9/4/06 11:00	433.88	SWPW-1	10/18/06 12:00	465.34
SWPW-2	9/4/06 11:05	433.87	SWPW-1	10/18/06 12:05	465.33
SWPW-2	9/4/06 11:10	433.87	SWPW-1	10/18/06 12:10	465.37
SWPW-2	9/4/06 11:15	433.87	SWPW-1	10/18/06 12:15	465.36
SWPW-2	9/4/06 11:20	433.87	SWPW-1	10/18/06 12:20	465.36
SWPW-2	9/4/06 11:25	433.88	SWPW-1	10/18/06 12:25	465.33
SWPW-2	9/4/06 11:30	433.87	SWPW-1	10/18/06 12:30	465.37
SWPW-2	9/4/06 11:35	433.87	SWPW-1	10/18/06 12:35	465.34
SWPW-2	9/4/06 11:40	433.88	SWPW-1	10/18/06 12:40	465.36
SWPW-2	9/4/06 11:45	433.84	SWPW-1	10/18/06 12:45	465.31
SWPW-2	9/4/06 11:50	433.88	SWPW-1	10/18/06 12:50	465.35
SWPW-2	9/4/06 11:55	433.88	SWPW-1	10/18/06 12:55	465.35
SWPW-2	9/4/06 12:00	433.86	SWPW-1	10/18/06 13:00	465.31
SWPW-2	9/4/06 12:05	433.87	SWPW-1	10/18/06 13:05	465.30
SWPW-2	9/4/06 12:10	433.86	SWPW-1	10/18/06 13:10	465.34
SWPW-2	9/4/06 12:15	433.88	SWPW-1	10/18/06 13:15	465.33

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/4/06 12:20	433.90	SWPW-1	10/18/06 13:20	465.31
SWPW-2	9/4/06 12:25	433.88	SWPW-1	10/18/06 13:25	465.34
SWPW-2	9/4/06 12:30	433.88	SWPW-1	10/18/06 13:30	465.34
SWPW-2	9/4/06 12:35	433.83	SWPW-1	10/18/06 13:35	465.32
SWPW-2	9/4/06 12:40	433.87	SWPW-1	10/18/06 13:40	465.33
SWPW-2	9/4/06 12:45	433.88	SWPW-1	10/18/06 13:45	465.32
SWPW-2	9/4/06 12:50	433.88	SWPW-1	10/18/06 13:50	465.32
SWPW-2	9/4/06 12:55	433.86	SWPW-1	10/18/06 13:55	465.28
SWPW-2	9/4/06 13:00	433.86	SWPW-1	10/18/06 14:00	465.32
SWPW-2	9/4/06 13:05	433.84	SWPW-1	10/18/06 14:05	465.27
SWPW-2	9/4/06 13:10	433.87	SWPW-1	10/18/06 14:10	465.28
SWPW-2	9/4/06 13:15	433.84	SWPW-1	10/18/06 14:15	465.28
SWPW-2	9/4/06 13:20	433.84	SWPW-1	10/18/06 14:20	465.28
SWPW-2	9/4/06 13:25	433.84	SWPW-1	10/18/06 14:25	465.28
SWPW-2	9/4/06 13:30	433.86	SWPW-1	10/18/06 14:30	465.27
SWPW-2	9/4/06 13:35	433.86	SWPW-1	10/18/06 14:35	465.26
SWPW-2	9/4/06 13:40	433.84	SWPW-1	10/18/06 14:40	465.26
SWPW-2	9/4/06 13:45	433.84	SWPW-1	10/18/06 14:45	465.26
SWPW-2	9/4/06 13:50	433.84	SWPW-1	10/18/06 14:50	465.25
SWPW-2	9/4/06 13:55	433.84	SWPW-1	10/18/06 14:55	465.26
SWPW-2	9/4/06 14:00	433.84	SWPW-1	10/18/06 15:00	465.26
SWPW-2	9/4/06 14:05	433.83	SWPW-1	10/18/06 15:05	465.26
SWPW-2	9/4/06 14:10	433.86	SWPW-1	10/18/06 15:10	465.29
SWPW-2	9/4/06 14:15	433.82	SWPW-1	10/18/06 15:15	465.28
SWPW-2	9/4/06 14:20	433.83	SWPW-1	10/18/06 15:20	465.24
SWPW-2	9/4/06 14:25	433.82	SWPW-1	10/18/06 15:25	465.27
SWPW-2	9/4/06 14:30	433.81	SWPW-1	10/18/06 15:30	465.26
SWPW-2	9/4/06 14:35	433.86	SWPW-1	10/18/06 15:35	465.26
SWPW-2	9/4/06 14:40	433.85	SWPW-1	10/18/06 15:40	465.24
SWPW-2	9/4/06 14:45	433.85	SWPW-1	10/18/06 15:45	465.23
SWPW-2	9/4/06 14:50	433.81	SWPW-1	10/18/06 15:50	465.26
SWPW-2	9/4/06 14:55	433.83	SWPW-1	10/18/06 15:55	465.26
SWPW-2	9/4/06 15:00	433.83	SWPW-1	10/18/06 16:00	465.22
SWPW-2	9/4/06 15:05	433.82	SWPW-1	10/18/06 16:05	465.22
SWPW-2	9/4/06 15:10	433.82	SWPW-1	10/18/06 16:10	465.26
SWPW-2	9/4/06 15:15	433.82	SWPW-1	10/18/06 16:15	465.22
SWPW-2	9/4/06 15:20	433.81	SWPW-1	10/18/06 16:20	465.21
SWPW-2	9/4/06 15:25	433.84	SWPW-1	10/18/06 16:25	465.24
SWPW-2	9/4/06 15:30	433.84	SWPW-1	10/18/06 16:30	465.22
SWPW-2	9/4/06 15:35	433.82	SWPW-1	10/18/06 16:35	465.25
SWPW-2	9/4/06 15:40	433.81	SWPW-1	10/18/06 16:40	465.22
SWPW-2	9/4/06 15:45	433.85	SWPW-1	10/18/06 16:45	465.22
SWPW-2	9/4/06 15:50	433.84	SWPW-1	10/18/06 16:50	465.24
SWPW-2	9/4/06 15:55	433.80	SWPW-1	10/18/06 16:55	465.20
SWPW-2	9/4/06 16:00	433.81	SWPW-1	10/18/06 17:00	465.25
SWPW-2	9/4/06 16:05	433.81	SWPW-1	10/18/06 17:05	465.23
SWPW-2	9/4/06 16:10	433.79	SWPW-1	10/18/06 17:10	465.24
SWPW-2	9/4/06 16:15	433.82	SWPW-1	10/18/06 17:15	465.23
SWPW-2	9/4/06 16:20	433.79	SWPW-1	10/18/06 17:20	465.20
SWPW-2	9/4/06 16:25	433.83	SWPW-1	10/18/06 17:25	465.19
SWPW-2	9/4/06 16:30	433.79	SWPW-1	10/18/06 17:30	465.19
SWPW-2	9/4/06 16:35	433.81	SWPW-1	10/18/06 17:35	465.20
SWPW-2	9/4/06 16:40	433.82	SWPW-1	10/18/06 17:40	465.19
SWPW-2	9/4/06 16:45	433.81	SWPW-1	10/18/06 17:45	465.23
SWPW-2	9/4/06 16:50	433.82	SWPW-1	10/18/06 17:50	465.22
SWPW-2	9/4/06 16:55	433.78	SWPW-1	10/18/06 17:55	465.22
SWPW-2	9/4/06 17:00	433.79	SWPW-1	10/18/06 18:00	465.22
SWPW-2	9/4/06 17:05	433.81	SWPW-1	10/18/06 18:05	465.20
SWPW-2	9/4/06 17:10	433.81	SWPW-1	10/18/06 18:10	465.20
SWPW-2	9/4/06 17:15	433.81	SWPW-1	10/18/06 18:15	465.22
SWPW-2	9/4/06 17:20	433.78	SWPW-1	10/18/06 18:20	465.19
SWPW-2	9/4/06 17:25	433.82	SWPW-1	10/18/06 18:25	465.19
SWPW-2	9/4/06 17:30	433.78	SWPW-1	10/18/06 18:30	465.19
SWPW-2	9/4/06 17:35	433.78	SWPW-1	10/18/06 18:35	465.19
SWPW-2	9/4/06 17:40	433.79	SWPW-1	10/18/06 18:40	465.22
SWPW-2	9/4/06 17:45	433.79	SWPW-1	10/18/06 18:45	465.22
SWPW-2	9/4/06 17:50	433.79	SWPW-1	10/18/06 18:50	465.22
SWPW-2	9/4/06 17:55	433.80	SWPW-1	10/18/06 18:55	465.21
SWPW-2	9/4/06 18:00	433.79	SWPW-1	10/18/06 19:00	465.19
SWPW-2	9/4/06 18:05	433.80	SWPW-1	10/18/06 19:05	465.21
SWPW-2	9/4/06 18:10	433.80	SWPW-1	10/18/06 19:10	465.17
SWPW-2	9/4/06 18:15	433.78	SWPW-1	10/18/06 19:15	465.18
SWPW-2	9/4/06 18:20	433.79	SWPW-1	10/18/06 19:20	465.18
SWPW-2	9/4/06 18:25	433.80	SWPW-1	10/18/06 19:25	465.21
SWPW-2	9/4/06 18:30	433.79	SWPW-1	10/18/06 19:30	465.20
SWPW-2	9/4/06 18:35	433.79	SWPW-1	10/18/06 19:35	465.18
SWPW-2	9/4/06 18:40	433.78	SWPW-1	10/18/06 19:40	465.18
SWPW-2	9/4/06 18:45	433.78	SWPW-1	10/18/06 19:45	465.21
SWPW-2	9/4/06 18:50	433.78	SWPW-1	10/18/06 19:50	465.21
SWPW-2	9/4/06 18:55	433.78	SWPW-1	10/18/06 19:55	465.20
SWPW-2	9/4/06 19:00	433.79	SWPW-1	10/18/06 20:00	465.20
SWPW-2	9/4/06 19:05	433.78	SWPW-1	10/18/06 20:05	465.21
SWPW-2	9/4/06 19:10	433.79	SWPW-1	10/18/06 20:10	465.17
SWPW-2	9/4/06 19:15	433.79	SWPW-1	10/18/06 20:15	465.18
SWPW-2	9/4/06 19:20	433.82	SWPW-1	10/18/06 20:20	465.17
SWPW-2	9/4/06 19:25	433.79	SWPW-1	10/18/06 20:25	465.20
SWPW-2	9/4/06 19:30	433.79	SWPW-1	10/18/06 20:30	465.16
SWPW-2	9/4/06 19:35	433.79	SWPW-1	10/18/06 20:35	465.17
SWPW-2	9/4/06 19:40	433.79	SWPW-1	10/18/06 20:40	465.20
SWPW-2	9/4/06 19:45	433.79	SWPW-1	10/18/06 20:45	465.20
SWPW-2	9/4/06 19:50	433.80	SWPW-1	10/18/06 20:50	465.20
SWPW-2	9/4/06 19:55	433.83	SWPW-1	10/18/06 20:55	465.18
SWPW-2	9/4/06 20:00	433.79	SWPW-1	10/18/06 21:00	465.16
SWPW-2	9/4/06 20:05	433.82	SWPW-1	10/18/06 21:05	465.20
SWPW-2	9/4/06 20:10	433.82	SWPW-1	10/18/06 21:10	465.17
SWPW-2	9/4/06 20:15	433.79	SWPW-1	10/18/06 21:15	465.19
SWPW-2	9/4/06 20:20	433.80	SWPW-1	10/18/06 21:20	465.20
SWPW-2	9/4/06 20:25	433.82	SWPW-1	10/18/06 21:25	465.19
SWPW-2	9/4/06 20:30	433.81	SWPW-1	10/18/06 21:30	465.19
SWPW-2	9/4/06 20:35	433.80	SWPW-1	10/18/06 21:35	465.17

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/4/06 20:40	433.80	SWPW-1	10/18/06 21:40	465.19
SWPW-2	9/4/06 20:45	433.80	SWPW-1	10/18/06 21:45	465.21
SWPW-2	9/4/06 20:50	433.81	SWPW-1	10/18/06 21:50	465.18
SWPW-2	9/4/06 20:55	433.81	SWPW-1	10/18/06 21:55	465.19
SWPW-2	9/4/06 21:00	433.82	SWPW-1	10/18/06 22:00	465.19
SWPW-2	9/4/06 21:05	433.81	SWPW-1	10/18/06 22:05	465.16
SWPW-2	9/4/06 21:10	433.81	SWPW-1	10/18/06 22:10	465.19
SWPW-2	9/4/06 21:15	433.80	SWPW-1	10/18/06 22:15	465.19
SWPW-2	9/4/06 21:20	433.81	SWPW-1	10/18/06 22:20	465.16
SWPW-2	9/4/06 21:25	433.82	SWPW-1	10/18/06 22:25	465.15
SWPW-2	9/4/06 21:30	433.81	SWPW-1	10/18/06 22:30	465.18
SWPW-2	9/4/06 21:35	433.81	SWPW-1	10/18/06 22:35	465.18
SWPW-2	9/4/06 21:40	433.81	SWPW-1	10/18/06 22:40	465.18
SWPW-2	9/4/06 21:45	433.81	SWPW-1	10/18/06 22:45	465.18
SWPW-2	9/4/06 21:50	433.83	SWPW-1	10/18/06 22:50	465.15
SWPW-2	9/4/06 21:55	433.82	SWPW-1	10/18/06 22:55	465.18
SWPW-2	9/4/06 22:00	433.82	SWPW-1	10/18/06 23:00	465.18
SWPW-2	9/4/06 22:05	433.85	SWPW-1	10/18/06 23:05	465.15
SWPW-2	9/4/06 22:10	433.81	SWPW-1	10/18/06 23:10	465.17
SWPW-2	9/4/06 22:15	433.84	SWPW-1	10/18/06 23:15	465.17
SWPW-2	9/4/06 22:20	433.81	SWPW-1	10/18/06 23:20	465.14
SWPW-2	9/4/06 22:25	433.82	SWPW-1	10/18/06 23:25	465.17
SWPW-2	9/4/06 22:30	433.81	SWPW-1	10/18/06 23:30	465.13
SWPW-2	9/4/06 22:35	433.82	SWPW-1	10/18/06 23:35	465.17
SWPW-2	9/4/06 22:40	433.81	SWPW-1	10/18/06 23:40	465.13
SWPW-2	9/4/06 22:45	433.81	SWPW-1	10/18/06 23:45	465.16
SWPW-2	9/4/06 22:50	433.84	SWPW-1	10/18/06 23:50	465.16
SWPW-2	9/4/06 22:55	433.81	SWPW-1	10/18/06 23:55	465.16
SWPW-2	9/4/06 23:00	433.84	SWPW-1	10/19/06 0:00	465.16
SWPW-2	9/4/06 23:05	433.81	SWPW-1	10/19/06 0:05	465.16
SWPW-2	9/4/06 23:10	433.84	SWPW-1	10/19/06 0:10	465.15
SWPW-2	9/4/06 23:15	433.81	SWPW-1	10/19/06 0:15	465.16
SWPW-2	9/4/06 23:20	433.81	SWPW-1	10/19/06 0:20	465.15
SWPW-2	9/4/06 23:25	433.82	SWPW-1	10/19/06 0:25	465.12
SWPW-2	9/4/06 23:30	433.83	SWPW-1	10/19/06 0:30	465.15
SWPW-2	9/4/06 23:35	433.82	SWPW-1	10/19/06 0:35	465.12
SWPW-2	9/4/06 23:40	433.82	SWPW-1	10/19/06 0:40	465.12
SWPW-2	9/4/06 23:45	433.84	SWPW-1	10/19/06 0:45	465.16
SWPW-2	9/4/06 23:50	433.78	SWPW-1	10/19/06 0:50	465.14
SWPW-2	9/4/06 23:55	433.81	SWPW-1	10/19/06 0:55	465.15
SWPW-2	9/5/06 0:00	433.81	SWPW-1	10/19/06 1:00	465.14
SWPW-2	9/5/06 0:05	433.83	SWPW-1	10/19/06 1:05	465.15
SWPW-2	9/5/06 0:10	433.82	SWPW-1	10/19/06 1:10	465.14
SWPW-2	9/5/06 0:15	433.81	SWPW-1	10/19/06 1:15	465.14
SWPW-2	9/5/06 0:20	433.82	SWPW-1	10/19/06 1:20	465.10
SWPW-2	9/5/06 0:25	433.81	SWPW-1	10/19/06 1:25	465.14
SWPW-2	9/5/06 0:30	433.81	SWPW-1	10/19/06 1:30	465.13
SWPW-2	9/5/06 0:35	433.82	SWPW-1	10/19/06 1:35	465.14
SWPW-2	9/5/06 0:40	433.82	SWPW-1	10/19/06 1:40	465.10
SWPW-2	9/5/06 0:45	433.81	SWPW-1	10/19/06 1:45	465.13
SWPW-2	9/5/06 0:50	433.85	SWPW-1	10/19/06 1:50	465.10
SWPW-2	9/5/06 0:55	433.81	SWPW-1	10/19/06 1:55	465.12
SWPW-2	9/5/06 1:00	433.84	SWPW-1	10/19/06 2:00	465.13
SWPW-2	9/5/06 1:05	433.84	SWPW-1	10/19/06 2:05	465.10
SWPW-2	9/5/06 1:10	433.81	SWPW-1	10/19/06 2:10	465.09
SWPW-2	9/5/06 1:15	433.83	SWPW-1	10/19/06 2:15	465.09
SWPW-2	9/5/06 1:20	433.80	SWPW-1	10/19/06 2:20	465.12
SWPW-2	9/5/06 1:25	433.80	SWPW-1	10/19/06 2:25	465.13
SWPW-2	9/5/06 1:30	433.84	SWPW-1	10/19/06 2:30	465.12
SWPW-2	9/5/06 1:35	433.83	SWPW-1	10/19/06 2:35	465.11
SWPW-2	9/5/06 1:40	433.83	SWPW-1	10/19/06 2:40	465.08
SWPW-2	9/5/06 1:45	433.80	SWPW-1	10/19/06 2:45	465.11
SWPW-2	9/5/06 1:50	433.83	SWPW-1	10/19/06 2:50	465.08
SWPW-2	9/5/06 1:55	433.82	SWPW-1	10/19/06 2:55	465.11
SWPW-2	9/5/06 2:00	433.82	SWPW-1	10/19/06 3:00	465.08
SWPW-2	9/5/06 2:05	433.80	SWPW-1	10/19/06 3:05	465.10
SWPW-2	9/5/06 2:10	433.80	SWPW-1	10/19/06 3:10	465.11
SWPW-2	9/5/06 2:15	433.85	SWPW-1	10/19/06 3:15	465.10
SWPW-2	9/5/06 2:20	433.79	SWPW-1	10/19/06 3:20	465.11
SWPW-2	9/5/06 2:25	433.80	SWPW-1	10/19/06 3:25	465.11
SWPW-2	9/5/06 2:30	433.79	SWPW-1	10/19/06 3:30	465.06
SWPW-2	9/5/06 2:35	433.80	SWPW-1	10/19/06 3:35	465.10
SWPW-2	9/5/06 2:40	433.79	SWPW-1	10/19/06 3:40	465.06
SWPW-2	9/5/06 2:45	433.79	SWPW-1	10/19/06 3:45	465.06
SWPW-2	9/5/06 2:50	433.83	SWPW-1	10/19/06 3:50	465.09
SWPW-2	9/5/06 2:55	433.79	SWPW-1	10/19/06 3:55	465.06
SWPW-2	9/5/06 3:00	433.83	SWPW-1	10/19/06 4:00	465.05
SWPW-2	9/5/06 3:05	433.84	SWPW-1	10/19/06 4:05	465.09
SWPW-2	9/5/06 3:10	433.81	SWPW-1	10/19/06 4:10	465.08
SWPW-2	9/5/06 3:15	433.79	SWPW-1	10/19/06 4:15	465.05
SWPW-2	9/5/06 3:20	433.79	SWPW-1	10/19/06 4:20	465.05
SWPW-2	9/5/06 3:25	433.79	SWPW-1	10/19/06 4:25	465.06
SWPW-2	9/5/06 3:30	433.78	SWPW-1	10/19/06 4:30	465.09
SWPW-2	9/5/06 3:35	433.78	SWPW-1	10/19/06 4:35	465.08
SWPW-2	9/5/06 3:40	433.79	SWPW-1	10/19/06 4:40	465.08
SWPW-2	9/5/06 3:45	433.78	SWPW-1	10/19/06 4:45	465.08
SWPW-2	9/5/06 3:50	433.81	SWPW-1	10/19/06 4:50	465.08
SWPW-2	9/5/06 3:55	433.82	SWPW-1	10/19/06 4:55	465.08
SWPW-2	9/5/06 4:00	433.77	SWPW-1	10/19/06 5:00	465.07
SWPW-2	9/5/06 4:05	433.77	SWPW-1	10/19/06 5:05	465.07
SWPW-2	9/5/06 4:10	433.77	SWPW-1	10/19/06 5:10	465.08
SWPW-2	9/5/06 4:15	433.81	SWPW-1	10/19/06 5:15	465.08
SWPW-2	9/5/06 4:20	433.78	SWPW-1	10/19/06 5:20	465.04
SWPW-2	9/5/06 4:25	433.78	SWPW-1	10/19/06 5:25	465.04
SWPW-2	9/5/06 4:30	433.78	SWPW-1	10/19/06 5:30	465.07
SWPW-2	9/5/06 4:35	433.83	SWPW-1	10/19/06 5:35	465.07
SWPW-2	9/5/06 4:40	433.78	SWPW-1	10/19/06 5:40	465.07
SWPW-2	9/5/06 4:45	433.79	SWPW-1	10/19/06 5:45	465.06
SWPW-2	9/5/06 4:50	433.80	SWPW-1	10/19/06 5:50	465.04
SWPW-2	9/5/06 4:55	433.79	SWPW-1	10/19/06 5:55	465.07

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/5/06 5:00	433.78	SWPW-1	10/19/06 6:00	465.08
SWPW-2	9/5/06 5:05	433.78	SWPW-1	10/19/06 6:05	465.07
SWPW-2	9/5/06 5:10	433.79	SWPW-1	10/19/06 6:10	465.07
SWPW-2	9/5/06 5:15	433.80	SWPW-1	10/19/06 6:15	465.06
SWPW-2	9/5/06 5:20	433.81	SWPW-1	10/19/06 6:20	465.03
SWPW-2	9/5/06 5:25	433.80	SWPW-1	10/19/06 6:25	465.07
SWPW-2	9/5/06 5:30	433.80	SWPW-1	10/19/06 6:30	465.03
SWPW-2	9/5/06 5:35	433.80	SWPW-1	10/19/06 6:35	465.07
SWPW-2	9/5/06 5:40	433.79	SWPW-1	10/19/06 6:40	465.03
SWPW-2	9/5/06 5:45	433.79	SWPW-1	10/19/06 6:45	465.03
SWPW-2	9/5/06 5:50	433.79	SWPW-1	10/19/06 6:50	465.03
SWPW-2	9/5/06 5:55	433.78	SWPW-1	10/19/06 6:55	465.04
SWPW-2	9/5/06 6:00	433.79	SWPW-1	10/19/06 7:00	465.07
SWPW-2	9/5/06 6:05	433.78	SWPW-1	10/19/06 7:05	465.06
SWPW-2	9/5/06 6:10	433.78	SWPW-1	10/19/06 7:10	465.05
SWPW-2	9/5/06 6:15	433.81	SWPW-1	10/19/06 7:15	465.02
SWPW-2	9/5/06 6:20	433.78	SWPW-1	10/19/06 7:20	465.02
SWPW-2	9/5/06 6:25	433.78	SWPW-1	10/19/06 7:25	465.06
SWPW-2	9/5/06 6:30	433.79	SWPW-1	10/19/06 7:30	465.03
SWPW-2	9/5/06 6:35	433.79	SWPW-1	10/19/06 7:35	465.05
SWPW-2	9/5/06 6:40	433.79	SWPW-1	10/19/06 7:40	465.03
SWPW-2	9/5/06 6:45	433.79	SWPW-1	10/19/06 7:45	465.07
SWPW-2	9/5/06 6:50	433.79	SWPW-1	10/19/06 7:50	465.06
SWPW-2	9/5/06 6:55	433.80	SWPW-1	10/19/06 7:55	465.06
SWPW-2	9/5/06 7:00	433.80	SWPW-1	10/19/06 8:00	465.06
SWPW-2	9/5/06 7:05	433.79	SWPW-1	10/19/06 8:05	465.02
SWPW-2	9/5/06 7:10	433.83	SWPW-1	10/19/06 8:10	465.05
SWPW-2	9/5/06 7:15	433.84	SWPW-1	10/19/06 8:15	465.03
SWPW-2	9/5/06 7:20	433.83	SWPW-1	10/19/06 8:20	465.05
SWPW-2	9/5/06 7:25	433.80	SWPW-1	10/19/06 8:25	465.06
SWPW-2	9/5/06 7:30	433.83	SWPW-1	10/19/06 8:30	465.05
SWPW-2	9/5/06 7:35	433.81	SWPW-1	10/19/06 8:35	465.04
SWPW-2	9/5/06 7:40	433.81	SWPW-1	10/19/06 8:40	465.06
SWPW-2	9/5/06 7:45	433.82	SWPW-1	10/19/06 8:45	465.06
SWPW-2	9/5/06 7:50	433.82	SWPW-1	10/19/06 8:50	465.06
SWPW-2	9/5/06 7:55	433.81	SWPW-1	10/19/06 8:55	465.07
SWPW-2	9/5/06 8:00	433.81	SWPW-1	10/19/06 9:00	465.06
SWPW-2	9/5/06 8:05	433.84	SWPW-1	10/19/06 9:05	465.05
SWPW-2	9/5/06 8:10	433.84	SWPW-1	10/19/06 9:10	465.06
SWPW-2	9/5/06 8:15	433.80	SWPW-1	10/19/06 9:15	465.06
SWPW-2	9/5/06 8:20	433.84	SWPW-1	10/19/06 9:20	465.06
SWPW-2	9/5/06 8:25	433.84	SWPW-1	10/19/06 9:25	465.07
SWPW-2	9/5/06 8:30	433.84	SWPW-1	10/19/06 9:30	465.07
SWPW-2	9/5/06 8:35	433.81	SWPW-1	10/19/06 9:35	465.06
SWPW-2	9/5/06 8:40	433.85	SWPW-1	10/19/06 9:40	465.06
SWPW-2	9/5/06 8:45	433.85	SWPW-1	10/19/06 9:45	465.03
SWPW-2	9/5/06 8:50	433.81	SWPW-1	10/19/06 9:50	465.03
SWPW-2	9/5/06 8:55	433.86	SWPW-1	10/19/06 9:55	465.06
SWPW-2	9/5/06 9:00	433.86	SWPW-1	10/19/06 10:00	465.02
SWPW-2	9/5/06 9:05	433.82	SWPW-1	10/19/06 10:05	465.05
SWPW-2	9/5/06 9:10	433.86	SWPW-1	10/19/06 10:10	465.06
SWPW-2	9/5/06 9:15	433.82	SWPW-1	10/19/06 10:15	465.02
SWPW-2	9/5/06 9:20	433.83	SWPW-1	10/19/06 10:20	465.06
SWPW-2	9/5/06 9:25	433.86	SWPW-1	10/19/06 10:25	465.07
SWPW-2	9/5/06 9:30	433.83	SWPW-1	10/19/06 10:30	465.05
SWPW-2	9/5/06 9:35	433.83	SWPW-1	10/19/06 10:35	465.02
SWPW-2	9/5/06 9:40	433.84	SWPW-1	10/19/06 10:40	465.05
SWPW-2	9/5/06 9:45	433.84	SWPW-1	10/19/06 10:45	465.05
SWPW-2	9/5/06 9:50	433.84	SWPW-1	10/19/06 10:50	465.04
SWPW-2	9/5/06 9:55	433.83	SWPW-1	10/19/06 10:55	465.04
SWPW-2	9/5/06 10:00	433.83	SWPW-1	10/19/06 11:00	465.04
SWPW-2	9/5/06 10:05	433.87	SWPW-1	10/19/06 11:05	465.01
SWPW-2	9/5/06 10:10	433.83	SWPW-1	10/19/06 11:10	465.04
SWPW-2	9/5/06 10:15	433.82	SWPW-1	10/19/06 11:15	465.03
SWPW-2	9/5/06 10:20	433.87	SWPW-1	10/19/06 11:20	465.04
SWPW-2	9/5/06 10:25	433.86	SWPW-1	10/19/06 11:25	465.03
SWPW-2	9/5/06 10:30	433.86	SWPW-1	10/19/06 11:30	465.03
SWPW-2	9/5/06 10:35	433.86	SWPW-1	10/19/06 11:35	465.03
SWPW-2	9/5/06 10:40	433.82	SWPW-1	10/19/06 11:40	465.03
SWPW-2	9/5/06 10:45	433.87	SWPW-1	10/19/06 11:45	465.02
SWPW-2	9/5/06 10:50	433.84	SWPW-1	10/19/06 11:50	465.02
SWPW-2	9/5/06 10:55	433.87	SWPW-1	10/19/06 11:55	465.03
SWPW-2	9/5/06 11:00	433.87	SWPW-1	10/19/06 12:00	464.99
SWPW-2	9/5/06 11:05	433.86	SWPW-1	10/19/06 12:05	465.02
SWPW-2	9/5/06 11:10	433.86	SWPW-1	10/19/06 12:10	464.99
SWPW-2	9/5/06 11:15	433.87	SWPW-1	10/19/06 12:15	464.99
SWPW-2	9/5/06 11:20	433.87	SWPW-1	10/19/06 12:20	465.01
SWPW-2	9/5/06 11:25	433.88	SWPW-1	10/19/06 12:25	464.99
SWPW-2	9/5/06 11:30	433.87	SWPW-1	10/19/06 12:30	465.02
SWPW-2	9/5/06 11:35	433.86	SWPW-1	10/19/06 12:35	465.02
SWPW-2	9/5/06 11:40	433.86	SWPW-1	10/19/06 12:40	465.01
SWPW-2	9/5/06 11:45	433.86	SWPW-1	10/19/06 12:45	465.02
SWPW-2	9/5/06 11:50	433.86	SWPW-1	10/19/06 12:50	465.01
SWPW-2	9/5/06 11:55	433.86	SWPW-1	10/19/06 12:55	465.01
SWPW-2	9/5/06 12:00	433.83	SWPW-1	10/19/06 13:00	465.01
SWPW-2	9/5/06 12:05	433.87	SWPW-1	10/19/06 13:05	465.00
SWPW-2	9/5/06 12:10	433.86	SWPW-1	10/19/06 13:10	464.99
SWPW-2	9/5/06 12:15	433.85	SWPW-1	10/19/06 13:15	465.00
SWPW-2	9/5/06 12:20	433.86	SWPW-1	10/19/06 13:20	465.00
SWPW-2	9/5/06 12:25	433.86	SWPW-1	10/19/06 13:25	464.99
SWPW-2	9/5/06 12:30	433.83	SWPW-1	10/19/06 13:30	464.96
SWPW-2	9/5/06 12:35	433.82	SWPW-1	10/19/06 13:35	464.95
SWPW-2	9/5/06 12:40	433.82	SWPW-1	10/19/06 13:40	464.98
SWPW-2	9/5/06 12:45	433.85	SWPW-1	10/19/06 13:45	464.98
SWPW-2	9/5/06 12:50	433.86	SWPW-1	10/19/06 13:50	464.98
SWPW-2	9/5/06 12:55	433.86	SWPW-1	10/19/06 13:55	464.98
SWPW-2	9/5/06 13:00	433.82	SWPW-1	10/19/06 14:00	464.97
SWPW-2	9/5/06 13:05	433.82	SWPW-1	10/19/06 14:05	464.97
SWPW-2	9/5/06 13:10	433.81	SWPW-1	10/19/06 14:10	464.97
SWPW-2	9/5/06 13:15	433.84	SWPW-1	10/19/06 14:15	464.96

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/5/06 13:20	433.82	SWPW-1	10/19/06 14:20	464.97
SWPW-2	9/5/06 13:25	433.81	SWPW-1	10/19/06 14:25	464.98
SWPW-2	9/5/06 13:30	433.86	SWPW-1	10/19/06 14:30	464.96
SWPW-2	9/5/06 13:35	433.83	SWPW-1	10/19/06 14:35	464.96
SWPW-2	9/5/06 13:40	433.83	SWPW-1	10/19/06 14:40	464.95
SWPW-2	9/5/06 13:45	433.83	SWPW-1	10/19/06 14:45	464.95
SWPW-2	9/5/06 13:50	433.83	SWPW-1	10/19/06 14:50	464.94
SWPW-2	9/5/06 13:55	434.36	SWPW-1	10/19/06 14:55	464.96
SWPW-2	9/5/06 14:00	434.20	SWPW-1	10/19/06 15:00	464.94
SWPW-2	9/5/06 14:05	434.08	SWPW-1	10/19/06 15:05	464.95
SWPW-2	9/5/06 14:10	434.03	SWPW-1	10/19/06 15:10	464.95
SWPW-2	9/5/06 14:15	434.03	SWPW-1	10/19/06 15:15	464.94
SWPW-2	9/5/06 14:20	433.98	SWPW-1	10/19/06 15:20	464.94
SWPW-2	9/5/06 14:25	433.97	SWPW-1	10/19/06 15:25	464.91
SWPW-2	9/5/06 14:30	433.92	SWPW-1	10/19/06 15:30	464.93
SWPW-2	9/5/06 14:35	433.91	SWPW-1	10/19/06 15:35	464.93
SWPW-2	9/5/06 14:40	433.89	SWPW-1	10/19/06 15:40	464.90
SWPW-2	9/5/06 14:45	433.88	SWPW-1	10/19/06 15:45	464.94
SWPW-2	9/5/06 14:50	433.86	SWPW-1	10/19/06 15:50	464.92
SWPW-2	9/5/06 14:55	433.86	SWPW-1	10/19/06 15:55	464.92
SWPW-2	9/5/06 15:00	433.86	SWPW-1	10/19/06 16:00	464.92
SWPW-2	9/5/06 15:05	433.89	SWPW-1	10/19/06 16:05	464.93
SWPW-2	9/5/06 15:10	433.84	SWPW-1	10/19/06 16:10	464.92
SWPW-2	9/5/06 15:15	433.83	SWPW-1	10/19/06 16:15	464.92
SWPW-2	9/5/06 15:20	433.82	SWPW-1	10/19/06 16:20	464.91
SWPW-2	9/5/06 15:25	433.83	SWPW-1	10/19/06 16:25	464.89
SWPW-2	9/5/06 15:30	433.80	SWPW-1	10/19/06 16:30	464.91
SWPW-2	9/5/06 15:35	433.81	SWPW-1	10/19/06 16:35	464.91
SWPW-2	9/5/06 15:40	433.83	SWPW-1	10/19/06 16:40	464.91
SWPW-2	9/5/06 15:45	433.80	SWPW-1	10/19/06 16:45	464.91
SWPW-2	9/5/06 15:50	433.83	SWPW-1	10/19/06 16:50	464.87
SWPW-2	9/5/06 15:55	433.78	SWPW-1	10/19/06 16:55	464.90
SWPW-2	9/5/06 16:00	433.78	SWPW-1	10/19/06 17:00	464.90
SWPW-2	9/5/06 16:05	433.81	SWPW-1	10/19/06 17:05	464.90
SWPW-2	9/5/06 16:10	433.80	SWPW-1	10/19/06 17:10	464.87
SWPW-2	9/5/06 16:15	433.81	SWPW-1	10/19/06 17:15	464.87
SWPW-2	9/5/06 16:20	433.79	SWPW-1	10/19/06 17:20	464.86
SWPW-2	9/5/06 16:25	433.80	SWPW-1	10/19/06 17:25	464.89
SWPW-2	9/5/06 16:30	433.80	SWPW-1	10/19/06 17:30	464.86
SWPW-2	9/5/06 16:35	433.80	SWPW-1	10/19/06 17:35	464.87
SWPW-2	9/5/06 16:40	433.79	SWPW-1	10/19/06 17:40	464.89
SWPW-2	9/5/06 16:45	433.79	SWPW-1	10/19/06 17:45	464.90
SWPW-2	9/5/06 16:50	433.78	SWPW-1	10/19/06 17:50	464.89
SWPW-2	9/5/06 16:55	433.75	SWPW-1	10/19/06 17:55	464.90
SWPW-2	9/5/06 17:00	433.74	SWPW-1	10/19/06 18:00	464.88
SWPW-2	9/5/06 17:05	433.75	SWPW-1	10/19/06 18:05	464.84
SWPW-2	9/5/06 17:10	433.77	SWPW-1	10/19/06 18:10	464.89
SWPW-2	9/5/06 17:15	433.74	SWPW-1	10/19/06 18:15	464.88
SWPW-2	9/5/06 17:20	433.77	SWPW-1	10/19/06 18:20	464.88
SWPW-2	9/5/06 17:25	433.77	SWPW-1	10/19/06 18:25	464.89
SWPW-2	9/5/06 17:30	433.77	SWPW-1	10/19/06 18:30	464.89
SWPW-2	9/5/06 17:35	433.77	SWPW-1	10/19/06 18:35	464.88
SWPW-2	9/5/06 17:40	433.77	SWPW-1	10/19/06 18:40	464.84
SWPW-2	9/5/06 17:45	433.73	SWPW-1	10/19/06 18:45	464.88
SWPW-2	9/5/06 17:50	433.75	SWPW-1	10/19/06 18:50	464.85
SWPW-2	9/5/06 17:55	433.76	SWPW-1	10/19/06 18:55	464.87
SWPW-2	9/5/06 18:00	433.78	SWPW-1	10/19/06 19:00	464.88
SWPW-2	9/5/06 18:05	433.75	SWPW-1	10/19/06 19:05	464.88
SWPW-2	9/5/06 18:10	433.75	SWPW-1	10/19/06 19:10	464.87
SWPW-2	9/5/06 18:15	433.75	SWPW-1	10/19/06 19:15	464.87
SWPW-2	9/5/06 18:20	433.75	SWPW-1	10/19/06 19:20	464.86
SWPW-2	9/5/06 18:25	433.75	SWPW-1	10/19/06 19:25	464.86
SWPW-2	9/5/06 18:30	433.75	SWPW-1	10/19/06 19:30	464.84
SWPW-2	9/5/06 18:35	433.75	SWPW-1	10/19/06 19:35	464.84
SWPW-2	9/5/06 18:40	433.74	SWPW-1	10/19/06 19:40	464.86
SWPW-2	9/5/06 18:45	433.75	SWPW-1	10/19/06 19:45	464.86
SWPW-2	9/5/06 18:50	433.74	SWPW-1	10/19/06 19:50	464.86
SWPW-2	9/5/06 18:55	433.75	SWPW-1	10/19/06 19:55	464.86
SWPW-2	9/5/06 19:00	433.73	SWPW-1	10/19/06 20:00	464.86
SWPW-2	9/5/06 19:05	433.74	SWPW-1	10/19/06 20:05	464.83
SWPW-2	9/5/06 19:10	433.73	SWPW-1	10/19/06 20:10	464.87
SWPW-2	9/5/06 19:15	433.74	SWPW-1	10/19/06 20:15	464.86
SWPW-2	9/5/06 19:20	433.77	SWPW-1	10/19/06 20:20	464.83
SWPW-2	9/5/06 19:25	433.74	SWPW-1	10/19/06 20:25	464.84
SWPW-2	9/5/06 19:30	433.74	SWPW-1	10/19/06 20:30	464.84
SWPW-2	9/5/06 19:35	433.74	SWPW-1	10/19/06 20:35	464.86
SWPW-2	9/5/06 19:40	433.78	SWPW-1	10/19/06 20:40	464.86
SWPW-2	9/5/06 19:45	433.73	SWPW-1	10/19/06 20:45	464.86
SWPW-2	9/5/06 19:50	433.74	SWPW-1	10/19/06 20:50	464.82
SWPW-2	9/5/06 19:55	433.77	SWPW-1	10/19/06 20:55	464.86
SWPW-2	9/5/06 20:00	433.73	SWPW-1	10/19/06 21:00	464.83
SWPW-2	9/5/06 20:05	433.76	SWPW-1	10/19/06 21:05	464.85
SWPW-2	9/5/06 20:10	433.77	SWPW-1	10/19/06 21:10	464.82
SWPW-2	9/5/06 20:15	433.74	SWPW-1	10/19/06 21:15	464.87
SWPW-2	9/5/06 20:20	433.74	SWPW-1	10/19/06 21:20	464.87
SWPW-2	9/5/06 20:25	433.79	SWPW-1	10/19/06 21:25	464.86
SWPW-2	9/5/06 20:30	433.74	SWPW-1	10/19/06 21:30	464.86
SWPW-2	9/5/06 20:35	433.74	SWPW-1	10/19/06 21:35	464.82
SWPW-2	9/5/06 20:40	433.78	SWPW-1	10/19/06 21:40	464.82
SWPW-2	9/5/06 20:45	433.77	SWPW-1	10/19/06 21:45	464.86
SWPW-2	9/5/06 20:50	433.76	SWPW-1	10/19/06 21:50	464.82
SWPW-2	9/5/06 20:55	433.74	SWPW-1	10/19/06 21:55	464.86
SWPW-2	9/5/06 21:00	433.78	SWPW-1	10/19/06 22:00	464.86
SWPW-2	9/5/06 21:05	433.78	SWPW-1	10/19/06 22:05	464.87
SWPW-2	9/5/06 21:10	433.78	SWPW-1	10/19/06 22:10	464.82
SWPW-2	9/5/06 21:15	433.75	SWPW-1	10/19/06 22:15	464.86
SWPW-2	9/5/06 21:20	433.77	SWPW-1	10/19/06 22:20	464.86
SWPW-2	9/5/06 21:25	433.78	SWPW-1	10/19/06 22:25	464.86
SWPW-2	9/5/06 21:30	433.77	SWPW-1	10/19/06 22:30	464.84
SWPW-2	9/5/06 21:35	433.77	SWPW-1	10/19/06 22:35	464.86

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/5/06 21:40	433.74	SWPW-1	10/19/06 22:40	464.84
SWPW-2	9/5/06 21:45	433.78	SWPW-1	10/19/06 22:45	464.82
SWPW-2	9/5/06 21:50	433.78	SWPW-1	10/19/06 22:50	464.81
SWPW-2	9/5/06 21:55	433.79	SWPW-1	10/19/06 22:55	464.85
SWPW-2	9/5/06 22:00	433.75	SWPW-1	10/19/06 23:00	464.85
SWPW-2	9/5/06 22:05	433.78	SWPW-1	10/19/06 23:05	464.85
SWPW-2	9/5/06 22:10	433.74	SWPW-1	10/19/06 23:10	464.85
SWPW-2	9/5/06 22:15	433.77	SWPW-1	10/19/06 23:15	464.83
SWPW-2	9/5/06 22:20	433.76	SWPW-1	10/19/06 23:20	464.84
SWPW-2	9/5/06 22:25	433.78	SWPW-1	10/19/06 23:25	464.82
SWPW-2	9/5/06 22:30	433.76	SWPW-1	10/19/06 23:30	464.83
SWPW-2	9/5/06 22:35	433.77	SWPW-1	10/19/06 23:35	464.84
SWPW-2	9/5/06 22:40	433.73	SWPW-1	10/19/06 23:40	464.85
SWPW-2	9/5/06 22:45	433.77	SWPW-1	10/19/06 23:45	464.83
SWPW-2	9/5/06 22:50	433.76	SWPW-1	10/19/06 23:50	464.83
SWPW-2	9/5/06 22:55	433.77	SWPW-1	10/19/06 23:55	464.83
SWPW-2	9/5/06 23:00	433.77	SWPW-1	10/20/06 0:00	464.82
SWPW-2	9/5/06 23:05	433.78	SWPW-1	10/20/06 0:05	464.82
SWPW-2	9/5/06 23:10	433.74	SWPW-1	10/20/06 0:10	464.83
SWPW-2	9/5/06 23:15	433.79	SWPW-1	10/20/06 0:15	464.82
SWPW-2	9/5/06 23:20	433.78	SWPW-1	10/20/06 0:20	464.81
SWPW-2	9/5/06 23:25	433.77	SWPW-1	10/20/06 0:25	464.81
SWPW-2	9/5/06 23:30	433.77	SWPW-1	10/20/06 0:30	464.82
SWPW-2	9/5/06 23:35	433.76	SWPW-1	10/20/06 0:35	464.81
SWPW-2	9/5/06 23:40	433.78	SWPW-1	10/20/06 0:40	464.82
SWPW-2	9/5/06 23:45	433.78	SWPW-1	10/20/06 0:45	464.81
SWPW-2	9/5/06 23:50	433.75	SWPW-1	10/20/06 0:50	464.81
SWPW-2	9/5/06 23:55	433.75	SWPW-1	10/20/06 0:55	464.80
SWPW-2	9/6/06 0:00	433.74	SWPW-1	10/20/06 1:00	464.81
SWPW-2	9/6/06 0:05	433.78	SWPW-1	10/20/06 1:05	464.76
SWPW-2	9/6/06 0:10	433.80	SWPW-1	10/20/06 1:10	464.80
SWPW-2	9/6/06 0:15	433.76	SWPW-1	10/20/06 1:15	464.78
SWPW-2	9/6/06 0:20	433.74	SWPW-1	10/20/06 1:20	464.79
SWPW-2	9/6/06 0:25	433.75	SWPW-1	10/20/06 1:25	464.78
SWPW-2	9/6/06 0:30	433.75	SWPW-1	10/20/06 1:30	464.79
SWPW-2	9/6/06 0:35	433.74	SWPW-1	10/20/06 1:35	464.79
SWPW-2	9/6/06 0:40	433.75	SWPW-1	10/20/06 1:40	464.75
SWPW-2	9/6/06 0:45	433.77	SWPW-1	10/20/06 1:45	464.79
SWPW-2	9/6/06 0:50	433.77	SWPW-1	10/20/06 1:50	464.78
SWPW-2	9/6/06 0:55	433.76	SWPW-1	10/20/06 1:55	464.78
SWPW-2	9/6/06 1:00	433.77	SWPW-1	10/20/06 2:00	464.74
SWPW-2	9/6/06 1:05	433.76	SWPW-1	10/20/06 2:05	464.77
SWPW-2	9/6/06 1:10	433.75	SWPW-1	10/20/06 2:10	464.78
SWPW-2	9/6/06 1:15	433.75	SWPW-1	10/20/06 2:15	464.77
SWPW-2	9/6/06 1:20	433.76	SWPW-1	10/20/06 2:20	464.78
SWPW-2	9/6/06 1:25	433.74	SWPW-1	10/20/06 2:25	464.78
SWPW-2	9/6/06 1:30	433.75	SWPW-1	10/20/06 2:30	464.76
SWPW-2	9/6/06 1:35	433.74	SWPW-1	10/20/06 2:35	464.75
SWPW-2	9/6/06 1:40	433.79	SWPW-1	10/20/06 2:40	464.76
SWPW-2	9/6/06 1:45	433.74	SWPW-1	10/20/06 2:45	464.76
SWPW-2	9/6/06 1:50	433.75	SWPW-1	10/20/06 2:50	464.75
SWPW-2	9/6/06 1:55	433.74	SWPW-1	10/20/06 2:55	464.72
SWPW-2	9/6/06 2:00	433.74	SWPW-1	10/20/06 3:00	464.76
SWPW-2	9/6/06 2:05	433.74	SWPW-1	10/20/06 3:05	464.75
SWPW-2	9/6/06 2:10	433.74	SWPW-1	10/20/06 3:10	464.75
SWPW-2	9/6/06 2:15	433.71	SWPW-1	10/20/06 3:15	464.75
SWPW-2	9/6/06 2:20	433.75	SWPW-1	10/20/06 3:20	464.74
SWPW-2	9/6/06 2:25	433.76	SWPW-1	10/20/06 3:25	464.75
SWPW-2	9/6/06 2:30	433.78	SWPW-1	10/20/06 3:30	464.75
SWPW-2	9/6/06 2:35	433.74	SWPW-1	10/20/06 3:35	464.74
SWPW-2	9/6/06 2:40	433.75	SWPW-1	10/20/06 3:40	464.74
SWPW-2	9/6/06 2:45	433.75	SWPW-1	10/20/06 3:45	464.75
SWPW-2	9/6/06 2:50	433.71	SWPW-1	10/20/06 3:50	464.74
SWPW-2	9/6/06 2:55	433.74	SWPW-1	10/20/06 3:55	464.74
SWPW-2	9/6/06 3:00	433.74	SWPW-1	10/20/06 4:00	464.72
SWPW-2	9/6/06 3:05	433.74	SWPW-1	10/20/06 4:05	464.72
SWPW-2	9/6/06 3:10	433.73	SWPW-1	10/20/06 4:10	464.74
SWPW-2	9/6/06 3:15	433.74	SWPW-1	10/20/06 4:15	464.72
SWPW-2	9/6/06 3:20	433.74	SWPW-1	10/20/06 4:20	464.72
SWPW-2	9/6/06 3:25	433.75	SWPW-1	10/20/06 4:25	464.70
SWPW-2	9/6/06 3:30	433.73	SWPW-1	10/20/06 4:30	464.72
SWPW-2	9/6/06 3:35	433.72	SWPW-1	10/20/06 4:35	464.68
SWPW-2	9/6/06 3:40	433.72	SWPW-1	10/20/06 4:40	464.70
SWPW-2	9/6/06 3:45	433.73	SWPW-1	10/20/06 4:45	464.70
SWPW-2	9/6/06 3:50	433.77	SWPW-1	10/20/06 4:50	464.69
SWPW-2	9/6/06 3:55	433.72	SWPW-1	10/20/06 4:55	464.70
SWPW-2	9/6/06 4:00	433.72	SWPW-1	10/20/06 5:00	464.66
SWPW-2	9/6/06 4:05	433.73	SWPW-1	10/20/06 5:05	464.67
SWPW-2	9/6/06 4:10	433.70	SWPW-1	10/20/06 5:10	464.69
SWPW-2	9/6/06 4:15	433.74	SWPW-1	10/20/06 5:15	464.67
SWPW-2	9/6/06 4:20	433.69	SWPW-1	10/20/06 5:20	464.68
SWPW-2	9/6/06 4:25	433.73	SWPW-1	10/20/06 5:25	464.69
SWPW-2	9/6/06 4:30	433.72	SWPW-1	10/20/06 5:30	464.68
SWPW-2	9/6/06 4:35	433.72	SWPW-1	10/20/06 5:35	464.67
SWPW-2	9/6/06 4:40	433.72	SWPW-1	10/20/06 5:40	464.69
SWPW-2	9/6/06 4:45	433.72	SWPW-1	10/20/06 5:45	464.68
SWPW-2	9/6/06 4:50	433.72	SWPW-1	10/20/06 5:50	464.65
SWPW-2	9/6/06 4:55	433.72	SWPW-1	10/20/06 5:55	464.67
SWPW-2	9/6/06 5:00	433.72	SWPW-1	10/20/06 6:00	464.64
SWPW-2	9/6/06 5:05	433.71	SWPW-1	10/20/06 6:05	464.68
SWPW-2	9/6/06 5:10	433.72	SWPW-1	10/20/06 6:10	464.67
SWPW-2	9/6/06 5:15	433.72	SWPW-1	10/20/06 6:15	464.64
SWPW-2	9/6/06 5:20	433.73	SWPW-1	10/20/06 6:20	464.67
SWPW-2	9/6/06 5:25	433.73	SWPW-1	10/20/06 6:25	464.67
SWPW-2	9/6/06 5:30	433.71	SWPW-1	10/20/06 6:30	464.69
SWPW-2	9/6/06 5:35	433.70	SWPW-1	10/20/06 6:35	464.67
SWPW-2	9/6/06 5:40	433.71	SWPW-1	10/20/06 6:40	464.66
SWPW-2	9/6/06 5:45	433.71	SWPW-1	10/20/06 6:45	464.67
SWPW-2	9/6/06 5:50	433.71	SWPW-1	10/20/06 6:50	464.67
SWPW-2	9/6/06 5:55	433.75	SWPW-1	10/20/06 6:55	464.67

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/6/06 6:00	433.71	SWPW-1	10/20/06 7:00	464.67
SWPW-2	9/6/06 6:05	433.71	SWPW-1	10/20/06 7:05	464.66
SWPW-2	9/6/06 6:10	433.71	SWPW-1	10/20/06 7:10	464.67
SWPW-2	9/6/06 6:15	433.71	SWPW-1	10/20/06 7:15	464.66
SWPW-2	9/6/06 6:20	433.71	SWPW-1	10/20/06 7:20	464.66
SWPW-2	9/6/06 6:25	433.71	SWPW-1	10/20/06 7:25	464.66
SWPW-2	9/6/06 6:30	433.70	SWPW-1	10/20/06 7:30	464.66
SWPW-2	9/6/06 6:35	433.70	SWPW-1	10/20/06 7:35	464.66
SWPW-2	9/6/06 6:40	433.72	SWPW-1	10/20/06 7:40	464.67
SWPW-2	9/6/06 6:45	433.72	SWPW-1	10/20/06 7:45	464.66
SWPW-2	9/6/06 6:50	433.72	SWPW-1	10/20/06 7:50	464.66
SWPW-2	9/6/06 6:55	433.72	SWPW-1	10/20/06 7:55	464.65
SWPW-2	9/6/06 7:00	433.72	SWPW-1	10/20/06 8:00	464.66
SWPW-2	9/6/06 7:05	433.71	SWPW-1	10/20/06 8:05	464.65
SWPW-2	9/6/06 7:10	433.72	SWPW-1	10/20/06 8:10	464.65
SWPW-2	9/6/06 7:15	433.72	SWPW-1	10/20/06 8:15	464.68
SWPW-2	9/6/06 7:20	433.72	SWPW-1	10/20/06 8:20	464.65
SWPW-2	9/6/06 7:25	433.73	SWPW-1	10/20/06 8:25	464.66
SWPW-2	9/6/06 7:30	433.74	SWPW-1	10/20/06 8:30	464.67
SWPW-2	9/6/06 7:35	433.73	SWPW-1	10/20/06 8:35	464.66
SWPW-2	9/6/06 7:40	433.74	SWPW-1	10/20/06 8:40	464.66
SWPW-2	9/6/06 7:45	433.74	SWPW-1	10/20/06 8:45	464.67
SWPW-2	9/6/06 7:50	433.75	SWPW-1	10/20/06 8:50	464.66
SWPW-2	9/6/06 7:55	433.76	SWPW-1	10/20/06 8:55	464.66
SWPW-2	9/6/06 8:00	433.75	SWPW-1	10/20/06 9:00	464.66
SWPW-2	9/6/06 8:05	433.76	SWPW-1	10/20/06 9:05	464.68
SWPW-2	9/6/06 8:10	433.76	SWPW-1	10/20/06 9:10	464.67
SWPW-2	9/6/06 8:15	433.75	SWPW-1	10/20/06 9:15	464.67
SWPW-2	9/6/06 8:20	433.74	SWPW-1	10/20/06 9:20	464.63
SWPW-2	9/6/06 8:25	433.75	SWPW-1	10/20/06 9:25	464.65
SWPW-2	9/6/06 8:30	433.75	SWPW-1	10/20/06 9:30	464.66
SWPW-2	9/6/06 8:35	433.71	SWPW-1	10/20/06 9:35	464.66
SWPW-2	9/6/06 8:40	433.76	SWPW-1	10/20/06 9:40	464.66
SWPW-2	9/6/06 8:45	433.74	SWPW-1	10/20/06 9:45	464.67
SWPW-2	9/6/06 8:50	433.74	SWPW-1	10/20/06 9:50	464.67
SWPW-2	9/6/06 8:55	433.76	SWPW-1	10/20/06 9:55	464.65
SWPW-2	9/6/06 9:00	433.75	SWPW-1	10/20/06 10:00	464.66
SWPW-2	9/6/06 9:05	433.75	SWPW-1	10/20/06 10:05	464.67
SWPW-2	9/6/06 9:10	433.76	SWPW-1	10/20/06 10:10	464.66
SWPW-2	9/6/06 9:15	433.75	SWPW-1	10/20/06 10:15	464.67
SWPW-2	9/6/06 9:20	433.76	SWPW-1	10/20/06 10:20	464.67
SWPW-2	9/6/06 9:25	433.75	SWPW-1	10/20/06 10:25	464.68
SWPW-2	9/6/06 9:30	433.79	SWPW-1	10/20/06 10:30	464.67
SWPW-2	9/6/06 9:35	433.76	SWPW-1	10/20/06 10:35	464.68
SWPW-2	9/6/06 9:40	433.76	SWPW-1	10/20/06 10:40	464.68
SWPW-2	9/6/06 9:45	433.78	SWPW-1	10/20/06 10:45	464.66
SWPW-2	9/6/06 9:50	433.76	SWPW-1	10/20/06 10:50	464.67
SWPW-2	9/6/06 9:55	433.77	SWPW-1	10/20/06 10:55	464.67
SWPW-2	9/6/06 10:00	433.79	SWPW-1	10/20/06 11:00	464.68
SWPW-2	9/6/06 10:05	433.77	SWPW-1	10/20/06 11:05	464.67
SWPW-2	9/6/06 10:10	433.77	SWPW-1	10/20/06 11:10	464.68
SWPW-2	9/6/06 10:15	433.76	SWPW-1	10/20/06 11:15	464.68
SWPW-2	9/6/06 10:20	433.77	SWPW-1	10/20/06 11:20	464.67
SWPW-2	9/6/06 10:25	433.77	SWPW-1	10/20/06 11:25	464.68
SWPW-2	9/6/06 10:30	433.78	SWPW-1	10/20/06 11:30	464.67
SWPW-2	9/6/06 10:35	433.76	SWPW-1	10/20/06 11:35	464.68
SWPW-2	9/6/06 10:40	433.80	SWPW-1	10/20/06 11:40	464.68
SWPW-2	9/6/06 10:45	433.76	SWPW-1	10/20/06 11:45	464.68
SWPW-2	9/6/06 10:50	433.77	SWPW-1	10/20/06 11:50	464.68
SWPW-2	9/6/06 10:55	433.77	SWPW-1	10/20/06 11:55	464.66
SWPW-2	9/6/06 11:00	433.77	SWPW-1	10/20/06 12:00	464.67
SWPW-2	9/6/06 11:05	433.78	SWPW-1	10/20/06 12:05	464.67
SWPW-2	9/6/06 11:10	433.78	SWPW-1	10/20/06 12:10	464.67
SWPW-2	9/6/06 11:15	433.77	SWPW-1	10/20/06 12:15	464.67
SWPW-2	9/6/06 11:20	433.78	SWPW-1	10/20/06 12:20	464.67
SWPW-2	9/6/06 11:25	433.78	SWPW-1	10/20/06 12:25	464.67
SWPW-2	9/6/06 11:30	433.79	SWPW-1	10/20/06 12:30	464.68
SWPW-2	9/6/06 11:35	433.78	SWPW-1	10/20/06 12:35	464.67
SWPW-2	9/6/06 11:40	433.79	SWPW-1	10/20/06 12:40	464.67
SWPW-2	9/6/06 11:45	433.78	SWPW-1	10/20/06 12:45	464.67
SWPW-2	9/6/06 11:50	433.78	SWPW-1	10/20/06 12:50	464.66
SWPW-2	9/6/06 11:55	433.79	SWPW-1	10/20/06 12:55	464.67
SWPW-2	9/6/06 12:00	433.79	SWPW-1	10/20/06 13:00	464.65
SWPW-2	9/6/06 12:05	433.78	SWPW-1	10/20/06 13:05	464.66
SWPW-2	9/6/06 12:10	433.77	SWPW-1	10/20/06 13:10	464.63
SWPW-2	9/6/06 12:15	433.78	SWPW-1	10/20/06 13:15	464.63
SWPW-2	9/6/06 12:20	433.78	SWPW-1	10/20/06 13:20	464.66
SWPW-2	9/6/06 12:25	433.78	SWPW-1	10/20/06 13:25	464.66
SWPW-2	9/6/06 12:30	433.77	SWPW-1	10/20/06 13:30	464.66
SWPW-2	9/6/06 12:35	433.78	SWPW-1	10/20/06 13:35	464.65
SWPW-2	9/6/06 12:40	433.76	SWPW-1	10/20/06 13:40	464.65
SWPW-2	9/6/06 12:45	433.76	SWPW-1	10/20/06 13:45	464.68
SWPW-2	9/6/06 12:50	433.78	SWPW-1	10/20/06 13:50	464.66
SWPW-2	9/6/06 12:55	433.75	SWPW-1	10/20/06 13:55	464.66
SWPW-2	9/6/06 13:00	433.75	SWPW-1	10/20/06 14:00	464.63
SWPW-2	9/6/06 13:05	433.75	SWPW-1	10/20/06 14:05	464.66
SWPW-2	9/6/06 13:10	433.76	SWPW-1	10/20/06 14:10	464.65
SWPW-2	9/6/06 13:15	433.76	SWPW-1	10/20/06 14:15	464.62
SWPW-2	9/6/06 13:20	433.76	SWPW-1	10/20/06 14:20	464.65
SWPW-2	9/6/06 13:25	433.75	SWPW-1	10/20/06 14:25	464.61
SWPW-2	9/6/06 13:30	433.75	SWPW-1	10/20/06 14:30	464.62
SWPW-2	9/6/06 13:35	433.75	SWPW-1	10/20/06 14:35	464.65
SWPW-2	9/6/06 13:40	433.78	SWPW-1	10/20/06 14:40	464.65
SWPW-2	9/6/06 13:45	433.75	SWPW-1	10/20/06 14:45	464.65
SWPW-2	9/6/06 13:50	433.75	SWPW-1	10/20/06 14:50	464.64
SWPW-2	9/6/06 13:55	433.74	SWPW-1	10/20/06 14:55	464.64
SWPW-2	9/6/06 14:00	433.75	SWPW-1	10/20/06 15:00	464.65
SWPW-2	9/6/06 14:05	433.77	SWPW-1	10/20/06 15:05	464.66
SWPW-2	9/6/06 14:10	433.75	SWPW-1	10/20/06 15:10	464.64
SWPW-2	9/6/06 14:15	433.75	SWPW-1	10/20/06 15:15	464.67

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/6/06 14:20	433.75	SWPW-1	10/20/06 15:20	464.64
SWPW-2	9/6/06 14:25	433.75	SWPW-1	10/20/06 15:25	464.64
SWPW-2	9/6/06 14:30	433.74	SWPW-1	10/20/06 15:30	464.64
SWPW-2	9/6/06 14:35	433.75	SWPW-1	10/20/06 15:35	464.64
SWPW-2	9/6/06 14:40	433.73	SWPW-1	10/20/06 15:40	464.63
SWPW-2	9/6/06 14:45	433.73	SWPW-1	10/20/06 15:45	464.63
SWPW-2	9/6/06 14:50	433.72	SWPW-1	10/20/06 15:50	464.63
SWPW-2	9/6/06 14:55	433.74	SWPW-1	10/20/06 15:55	464.64
SWPW-2	9/6/06 15:00	433.73	SWPW-1	10/20/06 16:00	464.64
SWPW-2	9/6/06 15:05	433.73	SWPW-1	10/20/06 16:05	464.65
SWPW-2	9/6/06 15:10	433.72	SWPW-1	10/20/06 16:10	464.64
SWPW-2	9/6/06 15:15	433.73	SWPW-1	10/20/06 16:15	464.63
SWPW-2	9/6/06 15:20	433.73	SWPW-1	10/20/06 16:20	464.63
SWPW-2	9/6/06 15:25	433.74	SWPW-1	10/20/06 16:25	464.63
SWPW-2	9/6/06 15:30	433.72	SWPW-1	10/20/06 16:30	464.63
SWPW-2	9/6/06 15:35	433.73	SWPW-1	10/20/06 16:35	464.63
SWPW-2	9/6/06 15:40	433.72	SWPW-1	10/20/06 16:40	464.63
SWPW-2	9/6/06 15:45	433.71	SWPW-1	10/20/06 16:45	464.63
SWPW-2	9/6/06 15:50	433.72	SWPW-1	10/20/06 16:50	464.63
SWPW-2	9/6/06 15:55	433.72	SWPW-1	10/20/06 16:55	464.64
SWPW-2	9/6/06 16:00	433.71	SWPW-1	10/20/06 17:00	464.63
SWPW-2	9/6/06 16:05	433.70	SWPW-1	10/20/06 17:05	464.60
SWPW-2	9/6/06 16:10	433.70	SWPW-1	10/20/06 17:10	464.63
SWPW-2	9/6/06 16:30	433.70	SWPW-1	10/20/06 17:15	464.64
SWPW-2	9/6/06 16:35	433.69	SWPW-1	10/20/06 17:20	464.64
SWPW-2	9/6/06 16:40	433.70	SWPW-1	10/20/06 17:25	464.64
SWPW-2	9/6/06 16:45	433.69	SWPW-1	10/20/06 17:30	464.64
SWPW-2	9/6/06 16:50	433.70	SWPW-1	10/20/06 17:35	464.64
SWPW-2	9/6/06 16:55	433.70	SWPW-1	10/20/06 17:40	464.63
SWPW-2	9/6/06 17:00	433.69	SWPW-1	10/20/06 17:45	464.64
SWPW-2	9/6/06 17:05	433.70	SWPW-1	10/20/06 17:50	464.61
SWPW-2	9/6/06 17:10	433.71	SWPW-1	10/20/06 17:55	464.63
SWPW-2	9/6/06 17:15	433.68	SWPW-1	10/20/06 18:00	464.61
SWPW-2	9/6/06 17:20	433.66	SWPW-1	10/20/06 18:05	464.64
SWPW-2	9/6/06 17:25	433.71	SWPW-1	10/20/06 18:10	464.63
SWPW-2	9/6/06 17:30	433.70	SWPW-1	10/20/06 18:15	464.65
SWPW-2	9/6/06 17:35	433.66	SWPW-1	10/20/06 18:20	464.64
SWPW-2	9/6/06 17:40	433.70	SWPW-1	10/20/06 18:25	464.65
SWPW-2	9/6/06 17:45	433.66	SWPW-1	10/20/06 18:30	464.65
SWPW-2	9/6/06 17:50	433.70	SWPW-1	10/20/06 18:35	464.64
SWPW-2	9/6/06 17:55	433.69	SWPW-1	10/20/06 18:40	464.65
SWPW-2	9/6/06 18:00	433.65	SWPW-1	10/20/06 18:45	464.64
SWPW-2	9/6/06 18:05	433.69	SWPW-1	10/20/06 18:50	464.64
SWPW-2	9/6/06 18:10	433.70	SWPW-1	10/20/06 18:55	464.65
SWPW-2	9/6/06 18:15	433.69	SWPW-1	10/20/06 19:00	464.64
SWPW-2	9/6/06 18:20	433.65	SWPW-1	10/20/06 19:05	464.64
SWPW-2	9/6/06 18:25	433.65	SWPW-1	10/20/06 19:10	464.65
SWPW-2	9/6/06 18:30	433.65	SWPW-1	10/20/06 19:15	464.66
SWPW-2	9/6/06 18:35	433.69	SWPW-1	10/20/06 19:20	464.63
SWPW-2	9/6/06 18:40	433.68	SWPW-1	10/20/06 19:25	464.65
SWPW-2	9/6/06 18:45	433.65	SWPW-1	10/20/06 19:30	464.65
SWPW-2	9/6/06 18:50	433.67	SWPW-1	10/20/06 19:35	464.65
SWPW-2	9/6/06 18:55	433.68	SWPW-1	10/20/06 19:40	464.65
SWPW-2	9/6/06 19:00	433.70	SWPW-1	10/20/06 19:45	464.67
SWPW-2	9/6/06 19:05	433.64	SWPW-1	10/20/06 19:50	464.63
SWPW-2	9/6/06 19:10	433.65	SWPW-1	10/20/06 19:55	464.67
SWPW-2	9/6/06 19:15	433.68	SWPW-1	10/20/06 20:00	464.66
SWPW-2	9/6/06 19:20	433.64	SWPW-1	10/20/06 20:05	464.66
SWPW-2	9/6/06 19:25	433.69	SWPW-1	10/20/06 20:10	464.66
SWPW-2	9/6/06 19:30	433.68	SWPW-1	10/20/06 20:15	464.67
SWPW-2	9/6/06 19:35	433.65	SWPW-1	10/20/06 20:20	464.67
SWPW-2	9/6/06 19:40	433.68	SWPW-1	10/20/06 20:25	464.67
SWPW-2	9/6/06 19:45	433.68	SWPW-1	10/20/06 20:30	464.67
SWPW-2	9/6/06 19:50	433.68	SWPW-1	10/20/06 20:35	464.67
SWPW-2	9/6/06 19:55	433.68	SWPW-1	10/20/06 20:40	464.67
SWPW-2	9/6/06 20:00	433.67	SWPW-1	10/20/06 20:45	464.68
SWPW-2	9/6/06 20:05	433.68	SWPW-1	10/20/06 20:50	464.69
SWPW-2	9/6/06 20:10	433.70	SWPW-1	10/20/06 20:55	464.67
SWPW-2	9/6/06 20:15	433.67	SWPW-1	10/20/06 21:00	464.67
SWPW-2	9/6/06 20:20	433.65	SWPW-1	10/20/06 21:05	464.68
SWPW-2	9/6/06 20:25	433.66	SWPW-1	10/20/06 21:10	464.66
SWPW-2	9/6/06 20:30	433.70	SWPW-1	10/20/06 21:15	464.68
SWPW-2	9/6/06 20:35	433.66	SWPW-1	10/20/06 21:20	464.69
SWPW-2	9/6/06 20:40	433.67	SWPW-1	10/20/06 21:25	464.68
SWPW-2	9/6/06 20:45	433.70	SWPW-1	10/20/06 21:30	464.68
SWPW-2	9/6/06 20:50	433.70	SWPW-1	10/20/06 21:35	464.68
SWPW-2	9/6/06 20:55	433.67	SWPW-1	10/20/06 21:40	464.69
SWPW-2	9/6/06 21:00	433.71	SWPW-1	10/20/06 21:45	464.68
SWPW-2	9/6/06 21:05	433.69	SWPW-1	10/20/06 21:50	464.69
SWPW-2	9/6/06 21:10	433.66	SWPW-1	10/20/06 21:55	464.70
SWPW-2	9/6/06 21:15	433.70	SWPW-1	10/20/06 22:00	464.69
SWPW-2	9/6/06 21:20	433.70	SWPW-1	10/20/06 22:05	464.69
SWPW-2	9/6/06 21:25	433.69	SWPW-1	10/20/06 22:10	464.69
SWPW-2	9/6/06 21:30	433.66	SWPW-1	10/20/06 22:15	464.69
SWPW-2	9/6/06 21:35	433.68	SWPW-1	10/20/06 22:20	464.69
SWPW-2	9/6/06 21:40	433.67	SWPW-1	10/20/06 22:25	464.70
SWPW-2	9/6/06 21:45	433.68	SWPW-1	10/20/06 22:30	464.69
SWPW-2	9/6/06 21:50	433.71	SWPW-1	10/20/06 22:35	464.69
SWPW-2	9/6/06 21:55	433.71	SWPW-1	10/20/06 22:40	464.70
SWPW-2	9/6/06 22:00	433.66	SWPW-1	10/20/06 22:45	464.67
SWPW-2	9/6/06 22:05	433.67	SWPW-1	10/20/06 22:50	464.70
SWPW-2	9/6/06 22:10	433.67	SWPW-1	10/20/06 22:55	464.70
SWPW-2	9/6/06 22:15	433.67	SWPW-1	10/20/06 23:00	464.69
SWPW-2	9/6/06 22:20	433.70	SWPW-1	10/20/06 23:05	464.67
SWPW-2	9/6/06 22:25	433.68	SWPW-1	10/20/06 23:10	464.70
SWPW-2	9/6/06 22:30	433.72	SWPW-1	10/20/06 23:15	464.71
SWPW-2	9/6/06 22:35	433.68	SWPW-1	10/20/06 23:20	464.69
SWPW-2	9/6/06 22:40	433.68	SWPW-1	10/20/06 23:25	464.71
SWPW-2	9/6/06 22:45	433.68	SWPW-1	10/20/06 23:30	464.70
SWPW-2	9/6/06 22:50	433.72	SWPW-1	10/20/06 23:35	464.70

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/6/06 22:55	433.69	SWPW-1	10/20/06 23:40	464.71
SWPW-2	9/6/06 23:00	433.68	SWPW-1	10/20/06 23:45	464.70
SWPW-2	9/6/06 23:05	433.69	SWPW-1	10/20/06 23:50	464.70
SWPW-2	9/6/06 23:10	433.68	SWPW-1	10/20/06 23:55	464.70
SWPW-2	9/6/06 23:15	433.69	SWPW-1	10/21/06 0:00	464.69
SWPW-2	9/6/06 23:20	433.70	SWPW-1	10/21/06 0:05	464.68
SWPW-2	9/6/06 23:25	433.69	SWPW-1	10/21/06 0:10	464.70
SWPW-2	9/6/06 23:30	433.69	SWPW-1	10/21/06 0:15	464.71
SWPW-2	9/6/06 23:35	433.70	SWPW-1	10/21/06 0:20	464.70
SWPW-2	9/6/06 23:40	433.69	SWPW-1	10/21/06 0:25	464.70
SWPW-2	9/6/06 23:45	433.69	SWPW-1	10/21/06 0:30	464.70
SWPW-2	9/6/06 23:50	433.69	SWPW-1	10/21/06 0:35	464.69
SWPW-2	9/6/06 23:55	433.68	SWPW-1	10/21/06 0:40	464.70
SWPW-2	9/7/06 0:00	433.69	SWPW-1	10/21/06 0:45	464.69
SWPW-2	9/7/06 0:05	433.69	SWPW-1	10/21/06 0:50	464.70
SWPW-2	9/7/06 0:10	433.69	SWPW-1	10/21/06 0:55	464.70
SWPW-2	9/7/06 0:15	433.70	SWPW-1	10/21/06 1:00	464.68
SWPW-2	9/7/06 0:20	433.69	SWPW-1	10/21/06 1:05	464.69
SWPW-2	9/7/06 0:25	433.70	SWPW-1	10/21/06 1:10	464.69
SWPW-2	9/7/06 0:30	433.69	SWPW-1	10/21/06 1:15	464.72
SWPW-2	9/7/06 0:35	433.69	SWPW-1	10/21/06 1:20	464.69
SWPW-2	9/7/06 0:40	433.69	SWPW-1	10/21/06 1:25	464.68
SWPW-2	9/7/06 0:45	433.69	SWPW-1	10/21/06 1:30	464.69
SWPW-2	9/7/06 0:50	433.65	SWPW-1	10/21/06 1:35	464.68
SWPW-2	9/7/06 0:55	433.69	SWPW-1	10/21/06 1:40	464.68
SWPW-2	9/7/06 1:00	433.69	SWPW-1	10/21/06 1:45	464.68
SWPW-2	9/7/06 1:05	433.73	SWPW-1	10/21/06 1:50	464.68
SWPW-2	9/7/06 1:10	433.69	SWPW-1	10/21/06 1:55	464.68
SWPW-2	9/7/06 1:15	433.69	SWPW-1	10/21/06 2:00	464.68
SWPW-2	9/7/06 1:20	433.70	SWPW-1	10/21/06 2:05	464.69
SWPW-2	9/7/06 1:25	433.69	SWPW-1	10/21/06 2:10	464.68
SWPW-2	9/7/06 1:30	433.68	SWPW-1	10/21/06 2:15	464.67
SWPW-2	9/7/06 1:35	433.69	SWPW-1	10/21/06 2:20	464.68
SWPW-2	9/7/06 1:40	433.69	SWPW-1	10/21/06 2:25	464.67
SWPW-2	9/7/06 1:45	433.69	SWPW-1	10/21/06 2:30	464.67
SWPW-2	9/7/06 1:50	433.70	SWPW-1	10/21/06 2:35	464.67
SWPW-2	9/7/06 1:55	433.66	SWPW-1	10/21/06 2:40	464.67
SWPW-2	9/7/06 2:00	433.68	SWPW-1	10/21/06 2:45	464.67
SWPW-2	9/7/06 2:05	433.68	SWPW-1	10/21/06 2:50	464.67
SWPW-2	9/7/06 2:10	433.68	SWPW-1	10/21/06 2:55	464.66
SWPW-2	9/7/06 2:15	433.69	SWPW-1	10/21/06 3:00	464.67
SWPW-2	9/7/06 2:20	433.69	SWPW-1	10/21/06 3:05	464.67
SWPW-2	9/7/06 2:25	433.68	SWPW-1	10/21/06 3:10	464.67
SWPW-2	9/7/06 2:30	433.68	SWPW-1	10/21/06 3:15	464.66
SWPW-2	9/7/06 2:35	433.68	SWPW-1	10/21/06 3:20	464.65
SWPW-2	9/7/06 2:40	433.67	SWPW-1	10/21/06 3:25	464.66
SWPW-2	9/7/06 2:45	433.65	SWPW-1	10/21/06 3:30	464.66
SWPW-2	9/7/06 2:50	433.68	SWPW-1	10/21/06 3:35	464.65
SWPW-2	9/7/06 2:55	433.69	SWPW-1	10/21/06 3:40	464.65
SWPW-2	9/7/06 3:00	433.68	SWPW-1	10/21/06 3:45	464.66
SWPW-2	9/7/06 3:05	433.68	SWPW-1	10/21/06 3:50	464.64
SWPW-2	9/7/06 3:10	433.65	SWPW-1	10/21/06 3:55	464.64
SWPW-2	9/7/06 3:15	433.68	SWPW-1	10/21/06 4:00	464.64
SWPW-2	9/7/06 3:20	433.67	SWPW-1	10/21/06 4:05	464.65
SWPW-2	9/7/06 3:25	433.67	SWPW-1	10/21/06 4:10	464.63
SWPW-2	9/7/06 3:30	433.67	SWPW-1	10/21/06 4:15	464.64
SWPW-2	9/7/06 3:35	433.67	SWPW-1	10/21/06 4:20	464.63
SWPW-2	9/7/06 3:40	433.66	SWPW-1	10/21/06 4:25	464.64
SWPW-2	9/7/06 3:45	433.67	SWPW-1	10/21/06 4:30	464.63
SWPW-2	9/7/06 3:50	433.66	SWPW-1	10/21/06 4:35	464.63
SWPW-2	9/7/06 3:55	433.66	SWPW-1	10/21/06 4:40	464.62
SWPW-2	9/7/06 4:00	433.67	SWPW-1	10/21/06 4:45	464.63
SWPW-2	9/7/06 4:05	433.66	SWPW-1	10/21/06 4:50	464.63
SWPW-2	9/7/06 4:10	433.66	SWPW-1	10/21/06 4:55	464.60
SWPW-2	9/7/06 4:15	433.66	SWPW-1	10/21/06 5:00	464.64
SWPW-2	9/7/06 4:20	433.66	SWPW-1	10/21/06 5:05	464.64
SWPW-2	9/7/06 4:25	433.66	SWPW-1	10/21/06 5:10	464.60
SWPW-2	9/7/06 4:30	433.66	SWPW-1	10/21/06 5:15	464.60
SWPW-2	9/7/06 4:35	433.66	SWPW-1	10/21/06 5:20	464.63
SWPW-2	9/7/06 4:40	433.64	SWPW-1	10/21/06 5:25	464.62
SWPW-2	9/7/06 4:45	433.67	SWPW-1	10/21/06 5:30	464.61
SWPW-2	9/7/06 4:50	433.67	SWPW-1	10/21/06 5:35	464.62
SWPW-2	9/7/06 4:55	433.62	SWPW-1	10/21/06 5:40	464.62
SWPW-2	9/7/06 5:00	433.66	SWPW-1	10/21/06 5:45	464.62
SWPW-2	9/7/06 5:05	433.62	SWPW-1	10/21/06 5:50	464.61
SWPW-2	9/7/06 5:10	433.62	SWPW-1	10/21/06 5:55	464.60
SWPW-2	9/7/06 5:15	433.65	SWPW-1	10/21/06 6:00	464.61
SWPW-2	9/7/06 5:20	433.65	SWPW-1	10/21/06 6:05	464.61
SWPW-2	9/7/06 5:25	433.65	SWPW-1	10/21/06 6:10	464.61
SWPW-2	9/7/06 5:30	433.64	SWPW-1	10/21/06 6:15	464.62
SWPW-2	9/7/06 5:35	433.65	SWPW-1	10/21/06 6:20	464.61
SWPW-2	9/7/06 5:40	433.64	SWPW-1	10/21/06 6:25	464.61
SWPW-2	9/7/06 5:45	433.65	SWPW-1	10/21/06 6:30	464.62
SWPW-2	9/7/06 5:50	433.65	SWPW-1	10/21/06 6:35	464.61
SWPW-2	9/7/06 5:55	433.64	SWPW-1	10/21/06 6:40	464.59
SWPW-2	9/7/06 6:00	433.64	SWPW-1	10/21/06 6:45	464.61
SWPW-2	9/7/06 6:05	433.64	SWPW-1	10/21/06 6:50	464.61
SWPW-2	9/7/06 6:10	433.64	SWPW-1	10/21/06 6:55	464.61
SWPW-2	9/7/06 6:15	433.65	SWPW-1	10/21/06 7:00	464.60
SWPW-2	9/7/06 6:20	433.64	SWPW-1	10/21/06 7:05	464.61
SWPW-2	9/7/06 6:25	433.64	SWPW-1	10/21/06 7:10	464.61
SWPW-2	9/7/06 6:30	433.64	SWPW-1	10/21/06 7:15	464.57
SWPW-2	9/7/06 6:35	433.64	SWPW-1	10/21/06 7:20	464.60
SWPW-2	9/7/06 6:40	433.66	SWPW-1	10/21/06 7:25	464.60
SWPW-2	9/7/06 6:45	433.65	SWPW-1	10/21/06 7:30	464.61
SWPW-2	9/7/06 6:50	433.65	SWPW-1	10/21/06 7:35	464.61
SWPW-2	9/7/06 6:55	433.64	SWPW-1	10/21/06 7:40	464.61
SWPW-2	9/7/06 7:00	433.65	SWPW-1	10/21/06 7:45	464.58
SWPW-2	9/7/06 7:05	433.65	SWPW-1	10/21/06 7:50	464.61
SWPW-2	9/7/06 7:10	433.65	SWPW-1	10/21/06 7:55	464.61

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/7/06 7:15	433.64	SWPW-1	10/21/06 8:00	464.60
SWPW-2	9/7/06 7:20	433.68	SWPW-1	10/21/06 8:05	464.62
SWPW-2	9/7/06 7:25	433.65	SWPW-1	10/21/06 8:10	464.60
SWPW-2	9/7/06 7:30	433.64	SWPW-1	10/21/06 8:15	464.61
SWPW-2	9/7/06 7:35	433.64	SWPW-1	10/21/06 8:20	464.60
SWPW-2	9/7/06 7:40	433.65	SWPW-1	10/21/06 8:25	464.61
SWPW-2	9/7/06 7:45	433.64	SWPW-1	10/21/06 8:30	464.61
SWPW-2	9/7/06 7:50	433.65	SWPW-1	10/21/06 8:35	464.61
SWPW-2	9/7/06 7:55	433.66	SWPW-1	10/21/06 8:40	464.60
SWPW-2	9/7/06 8:00	433.65	SWPW-1	10/21/06 8:45	464.60
SWPW-2	9/7/06 8:05	433.66	SWPW-1	10/21/06 8:50	464.61
SWPW-2	9/7/06 8:10	433.66	SWPW-1	10/21/06 8:55	464.62
SWPW-2	9/7/06 8:15	433.66	SWPW-1	10/21/06 9:00	464.61
SWPW-2	9/7/06 8:20	433.66	SWPW-1	10/21/06 9:05	464.61
SWPW-2	9/7/06 8:25	433.66	SWPW-1	10/21/06 9:10	464.61
SWPW-2	9/7/06 8:30	433.66	SWPW-1	10/21/06 9:15	464.61
SWPW-2	9/7/06 8:35	433.65	SWPW-1	10/21/06 9:20	464.61
SWPW-2	9/7/06 8:40	433.67	SWPW-1	10/21/06 9:25	464.61
SWPW-2	9/7/06 8:45	433.65	SWPW-1	10/21/06 9:30	464.61
SWPW-2	9/7/06 8:50	433.66	SWPW-1	10/21/06 9:35	464.62
SWPW-2	9/7/06 8:55	433.67	SWPW-1	10/21/06 9:40	464.63
SWPW-2	9/7/06 9:00	433.66	SWPW-1	10/21/06 9:45	464.63
SWPW-2	9/7/06 9:05	465.05	SWPW-1	10/21/06 9:50	464.62
SWPW-2	9/7/06 9:10	467.93	SWPW-1	10/21/06 9:55	464.62
SWPW-2	9/7/06 9:15	469.84	SWPW-1	10/21/06 10:00	464.61
SWPW-2	9/7/06 9:20	471.64	SWPW-1	10/21/06 10:05	464.63
SWPW-2	9/7/06 9:25	472.54	SWPW-1	10/21/06 10:10	464.62
SWPW-2	9/7/06 9:30	473.15	SWPW-1	10/21/06 10:15	464.62
SWPW-2	9/7/06 9:35	473.17	SWPW-1	10/21/06 10:20	464.61
SWPW-2	9/7/06 9:40	474.99	SWPW-1	10/21/06 10:25	464.63
SWPW-2	9/7/06 9:45	475.13	SWPW-1	10/21/06 10:30	464.62
SWPW-2	9/7/06 9:50	476.92	SWPW-1	10/21/06 10:35	464.62
SWPW-2	9/7/06 9:55	476.16	SWPW-1	10/21/06 10:40	464.62
SWPW-2	9/7/06 10:00	477.15	SWPW-1	10/21/06 10:45	464.62
SWPW-2	9/7/06 10:05	477.53	SWPW-1	10/21/06 10:50	464.64
SWPW-2	9/7/06 10:10	477.31	SWPW-1	10/21/06 10:55	464.62
SWPW-2	9/7/06 10:15	477.35	SWPW-1	10/21/06 11:00	464.62
SWPW-2	9/7/06 10:20	478.00	SWPW-1	10/21/06 11:05	464.62
SWPW-2	9/7/06 10:25	479.50	SWPW-1	10/21/06 11:10	464.62
SWPW-2	9/7/06 10:30	478.92	SWPW-1	10/21/06 11:15	464.62
SWPW-2	9/7/06 10:35	479.70	SWPW-1	10/21/06 11:20	464.62
SWPW-2	9/7/06 10:40	480.59	SWPW-1	10/21/06 11:25	464.63
SWPW-2	9/7/06 10:45	479.75	SWPW-1	10/21/06 11:30	464.62
SWPW-2	9/7/06 10:50	480.35	SWPW-1	10/21/06 11:35	464.62
SWPW-2	9/7/06 10:55	480.65	SWPW-1	10/21/06 11:40	464.62
SWPW-2	9/7/06 11:00	480.72	SWPW-1	10/21/06 11:45	464.62
SWPW-2	9/7/06 11:05	480.26	SWPW-1	10/21/06 11:50	464.62
SWPW-2	9/7/06 11:10	480.55	SWPW-1	10/21/06 11:55	464.62
SWPW-2	9/7/06 11:15	480.58	SWPW-1	10/21/06 12:00	464.62
SWPW-2	9/7/06 11:20	481.49	SWPW-1	10/21/06 12:05	464.62
SWPW-2	9/7/06 11:25	482.06	SWPW-1	10/21/06 12:10	464.59
SWPW-2	9/7/06 11:30	482.32	SWPW-1	10/21/06 12:15	464.61
SWPW-2	9/7/06 11:35	481.70	SWPW-1	10/21/06 12:20	464.61
SWPW-2	9/7/06 11:40	482.62	SWPW-1	10/21/06 12:25	464.61
SWPW-2	9/7/06 11:45	482.18	SWPW-1	10/21/06 12:30	464.62
SWPW-2	9/7/06 11:50	482.06	SWPW-1	10/21/06 12:35	464.61
SWPW-2	9/7/06 11:55	482.96	SWPW-1	10/21/06 12:40	464.62
SWPW-2	9/7/06 12:00	482.65	SWPW-1	10/21/06 12:45	464.61
SWPW-2	9/7/06 12:05	483.01	SWPW-1	10/21/06 12:50	464.61
SWPW-2	9/7/06 12:10	482.97	SWPW-1	10/21/06 12:55	464.61
SWPW-2	9/7/06 12:15	483.63	SWPW-1	10/21/06 13:00	464.62
SWPW-2	9/7/06 12:20	483.56	SWPW-1	10/21/06 13:05	464.61
SWPW-2	9/7/06 12:25	483.30	SWPW-1	10/21/06 13:10	464.61
SWPW-2	9/7/06 12:30	483.53	SWPW-1	10/21/06 13:15	464.60
SWPW-2	9/7/06 12:35	483.86	SWPW-1	10/21/06 13:20	464.60
SWPW-2	9/7/06 12:40	484.04	SWPW-1	10/21/06 13:25	464.60
SWPW-2	9/7/06 12:45	484.06	SWPW-1	10/21/06 13:30	464.60
SWPW-2	9/7/06 12:50	484.34	SWPW-1	10/21/06 13:35	464.60
SWPW-2	9/7/06 12:55	484.54	SWPW-1	10/21/06 13:40	464.61
SWPW-2	9/7/06 13:00	483.72	SWPW-1	10/21/06 13:45	464.59
SWPW-2	9/7/06 13:05	484.48	SWPW-1	10/21/06 13:50	464.60
SWPW-2	9/7/06 13:10	484.55	SWPW-1	10/21/06 13:55	464.59
SWPW-2	9/7/06 13:15	485.34	SWPW-1	10/21/06 14:00	464.59
SWPW-2	9/7/06 13:20	485.03	SWPW-1	10/21/06 14:05	464.59
SWPW-2	9/7/06 13:25	485.58	SWPW-1	10/21/06 14:10	464.59
SWPW-2	9/7/06 13:30	484.38	SWPW-1	10/21/06 14:15	464.59
SWPW-2	9/7/06 13:35	485.10	SWPW-1	10/21/06 14:20	464.59
SWPW-2	9/7/06 13:40	485.76	SWPW-1	10/21/06 14:25	464.58
SWPW-2	9/7/06 13:45	485.45	SWPW-1	10/21/06 14:30	464.58
SWPW-2	9/7/06 13:50	485.42	SWPW-1	10/21/06 14:35	464.58
SWPW-2	9/7/06 13:55	485.16	SWPW-1	10/21/06 14:40	464.57
SWPW-2	9/7/06 14:00	486.17	SWPW-1	10/21/06 14:45	464.57
SWPW-2	9/7/06 14:05	485.25	SWPW-1	10/21/06 14:50	464.57
SWPW-2	9/7/06 14:10	485.86	SWPW-1	10/21/06 14:55	464.57
SWPW-2	9/7/06 14:15	484.50	SWPW-1	10/21/06 15:00	464.61
SWPW-2	9/7/06 14:20	486.11	SWPW-1	10/21/06 15:05	464.58
SWPW-2	9/7/06 14:25	486.23	SWPW-1	10/21/06 15:10	464.57
SWPW-2	9/7/06 14:30	485.51	SWPW-1	10/21/06 15:15	464.58
SWPW-2	9/7/06 14:35	486.33	SWPW-1	10/21/06 15:20	464.58
SWPW-2	9/7/06 14:40	486.35	SWPW-1	10/21/06 15:25	464.57
SWPW-2	9/7/06 14:45	486.01	SWPW-1	10/21/06 15:30	464.58
SWPW-2	9/7/06 14:50	486.56	SWPW-1	10/21/06 15:35	464.57
SWPW-2	9/7/06 14:55	486.26	SWPW-1	10/21/06 15:40	464.56
SWPW-2	9/7/06 15:00	486.91	SWPW-1	10/21/06 15:45	464.57
SWPW-2	9/7/06 15:05	486.86	SWPW-1	10/21/06 15:50	464.57
SWPW-2	9/7/06 15:10	487.04	SWPW-1	10/21/06 15:55	464.57
SWPW-2	9/7/06 15:15	486.38	SWPW-1	10/21/06 16:00	464.56
SWPW-2	9/7/06 15:20	486.48	SWPW-1	10/21/06 16:05	464.57
SWPW-2	9/7/06 15:25	486.42	SWPW-1	10/21/06 16:10	464.57
SWPW-2	9/7/06 15:30	487.17	SWPW-1	10/21/06 16:15	464.57

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/7/06 15:35	487.97	SWPW-1	10/21/06 16:20	464.57
SWPW-2	9/7/06 15:40	485.88	SWPW-1	10/21/06 16:25	464.55
SWPW-2	9/7/06 15:45	487.26	SWPW-1	10/21/06 16:30	464.58
SWPW-2	9/7/06 15:50	487.07	SWPW-1	10/21/06 16:35	464.57
SWPW-2	9/7/06 15:55	487.84	SWPW-1	10/21/06 16:40	464.56
SWPW-2	9/7/06 16:00	487.36	SWPW-1	10/21/06 16:45	464.55
SWPW-2	9/7/06 16:05	487.37	SWPW-1	10/21/06 16:50	464.55
SWPW-2	9/7/06 16:10	487.68	SWPW-1	10/21/06 16:55	464.56
SWPW-2	9/7/06 16:15	487.68	SWPW-1	10/21/06 17:00	464.57
SWPW-2	9/7/06 16:20	488.55	SWPW-1	10/21/06 17:05	464.56
SWPW-2	9/7/06 16:25	488.31	SWPW-1	10/21/06 17:10	464.56
SWPW-2	9/7/06 16:30	487.83	SWPW-1	10/21/06 17:15	464.56
SWPW-2	9/7/06 16:35	488.01	SWPW-1	10/21/06 17:20	464.56
SWPW-2	9/7/06 16:40	487.49	SWPW-1	10/21/06 17:25	464.54
SWPW-2	9/7/06 16:45	487.96	SWPW-1	10/21/06 17:30	464.55
SWPW-2	9/7/06 16:50	487.82	SWPW-1	10/21/06 17:35	464.55
SWPW-2	9/7/06 16:55	488.58	SWPW-1	10/21/06 17:40	464.55
SWPW-2	9/7/06 17:00	488.61	SWPW-1	10/21/06 17:45	464.56
SWPW-2	9/7/06 17:05	488.13	SWPW-1	10/21/06 17:50	464.55
SWPW-2	9/7/06 17:10	488.65	SWPW-1	10/21/06 17:55	464.55
SWPW-2	9/7/06 17:15	488.16	SWPW-1	10/21/06 18:00	464.55
SWPW-2	9/7/06 17:20	488.83	SWPW-1	10/21/06 18:05	464.54
SWPW-2	9/7/06 17:25	489.51	SWPW-1	10/21/06 18:10	464.58
SWPW-2	9/7/06 17:30	488.55	SWPW-1	10/21/06 18:15	464.54
SWPW-2	9/7/06 17:35	488.45	SWPW-1	10/21/06 18:20	464.55
SWPW-2	9/7/06 17:40	489.01	SWPW-1	10/21/06 18:25	464.54
SWPW-2	9/7/06 17:45	488.57	SWPW-1	10/21/06 18:30	464.54
SWPW-2	9/7/06 17:50	488.27	SWPW-1	10/21/06 18:35	464.54
SWPW-2	9/7/06 17:55	488.92	SWPW-1	10/21/06 18:40	464.54
SWPW-2	9/7/06 18:00	488.67	SWPW-1	10/21/06 18:45	464.54
SWPW-2	9/7/06 18:05	488.65	SWPW-1	10/21/06 18:50	464.54
SWPW-2	9/7/06 18:10	488.50	SWPW-1	10/21/06 18:55	464.54
SWPW-2	9/7/06 18:15	489.35	SWPW-1	10/21/06 19:00	464.54
SWPW-2	9/7/06 18:20	489.25	SWPW-1	10/21/06 19:05	464.54
SWPW-2	9/7/06 18:25	489.32	SWPW-1	10/21/06 19:10	464.54
SWPW-2	9/7/06 18:30	489.59	SWPW-1	10/21/06 19:15	464.54
SWPW-2	9/7/06 18:35	489.21	SWPW-1	10/21/06 19:20	464.54
SWPW-2	9/7/06 18:40	490.22	SWPW-1	10/21/06 19:25	464.53
SWPW-2	9/7/06 18:45	490.25	SWPW-1	10/21/06 19:30	464.55
SWPW-2	9/7/06 18:50	490.81	SWPW-1	10/21/06 19:35	464.55
SWPW-2	9/7/06 18:55	490.38	SWPW-1	10/21/06 19:40	464.56
SWPW-2	9/7/06 19:00	490.44	SWPW-1	10/21/06 19:45	464.56
SWPW-2	9/7/06 19:05	490.61	SWPW-1	10/21/06 19:50	464.55
SWPW-2	9/7/06 19:10	490.76	SWPW-1	10/21/06 19:55	464.55
SWPW-2	9/7/06 19:15	490.42	SWPW-1	10/21/06 20:00	464.55
SWPW-2	9/7/06 19:20	490.32	SWPW-1	10/21/06 20:05	464.55
SWPW-2	9/7/06 19:25	490.05	SWPW-1	10/21/06 20:10	464.52
SWPW-2	9/7/06 19:30	490.17	SWPW-1	10/21/06 20:15	464.55
SWPW-2	9/7/06 19:35	490.52	SWPW-1	10/21/06 20:20	464.56
SWPW-2	9/7/06 19:40	490.17	SWPW-1	10/21/06 20:25	464.55
SWPW-2	9/7/06 19:45	489.47	SWPW-1	10/21/06 20:30	464.55
SWPW-2	9/7/06 19:50	490.61	SWPW-1	10/21/06 20:35	464.54
SWPW-2	9/7/06 19:55	490.69	SWPW-1	10/21/06 20:40	464.56
SWPW-2	9/7/06 20:00	490.85	SWPW-1	10/21/06 20:45	464.55
SWPW-2	9/7/06 20:05	490.72	SWPW-1	10/21/06 20:50	464.57
SWPW-2	9/7/06 20:10	490.99	SWPW-1	10/21/06 20:55	464.55
SWPW-2	9/7/06 20:15	490.89	SWPW-1	10/21/06 21:00	464.55
SWPW-2	9/7/06 20:20	490.41	SWPW-1	10/21/06 21:05	464.56
SWPW-2	9/7/06 20:25	490.99	SWPW-1	10/21/06 21:10	464.56
SWPW-2	9/7/06 20:30	491.21	SWPW-1	10/21/06 21:15	464.56
SWPW-2	9/7/06 20:35	491.31	SWPW-1	10/21/06 21:20	464.56
SWPW-2	9/7/06 20:40	491.03	SWPW-1	10/21/06 21:25	464.56
SWPW-2	9/7/06 20:45	491.59	SWPW-1	10/21/06 21:30	464.55
SWPW-2	9/7/06 20:50	490.82	SWPW-1	10/21/06 21:35	464.56
SWPW-2	9/7/06 20:55	491.18	SWPW-1	10/21/06 21:40	464.56
SWPW-2	9/7/06 21:00	491.24	SWPW-1	10/21/06 21:45	464.56
SWPW-2	9/7/06 21:05	491.08	SWPW-1	10/21/06 21:50	464.56
SWPW-2	9/7/06 21:10	490.99	SWPW-1	10/21/06 21:55	464.56
SWPW-2	9/7/06 21:15	491.21	SWPW-1	10/21/06 22:00	464.56
SWPW-2	9/7/06 21:20	490.99	SWPW-1	10/21/06 22:05	464.55
SWPW-2	9/7/06 21:25	491.48	SWPW-1	10/21/06 22:10	464.56
SWPW-2	9/7/06 21:30	491.22	SWPW-1	10/21/06 22:15	464.56
SWPW-2	9/7/06 21:35	491.43	SWPW-1	10/21/06 22:20	464.56
SWPW-2	9/7/06 21:40	492.03	SWPW-1	10/21/06 22:25	464.59
SWPW-2	9/7/06 21:45	490.99	SWPW-1	10/21/06 22:30	464.55
SWPW-2	9/7/06 21:50	491.08	SWPW-1	10/21/06 22:35	464.57
SWPW-2	9/7/06 21:55	491.66	SWPW-1	10/21/06 22:40	464.57
SWPW-2	9/7/06 22:00	491.79	SWPW-1	10/21/06 22:45	464.57
SWPW-2	9/7/06 22:05	491.35	SWPW-1	10/21/06 22:50	464.58
SWPW-2	9/7/06 22:10	492.03	SWPW-1	10/21/06 22:55	464.58
SWPW-2	9/7/06 22:15	492.08	SWPW-1	10/21/06 23:00	464.58
SWPW-2	9/7/06 22:20	491.65	SWPW-1	10/21/06 23:05	464.57
SWPW-2	9/7/06 22:25	491.69	SWPW-1	10/21/06 23:10	464.57
SWPW-2	9/7/06 22:30	491.85	SWPW-1	10/21/06 23:15	464.57
SWPW-2	9/7/06 22:35	492.18	SWPW-1	10/21/06 23:20	464.56
SWPW-2	9/7/06 22:40	491.56	SWPW-1	10/21/06 23:25	464.57
SWPW-2	9/7/06 22:45	492.24	SWPW-1	10/21/06 23:30	464.57
SWPW-2	9/7/06 22:50	492.23	SWPW-1	10/21/06 23:35	464.57
SWPW-2	9/7/06 22:55	492.12	SWPW-1	10/21/06 23:40	464.57
SWPW-2	9/7/06 23:00	491.68	SWPW-1	10/21/06 23:45	464.57
SWPW-2	9/7/06 23:05	492.23	SWPW-1	10/21/06 23:50	464.57
SWPW-2	9/7/06 23:10	491.85	SWPW-1	10/21/06 23:55	464.56
SWPW-2	9/7/06 23:15	492.39	SWPW-1	10/22/06 0:00	464.57
SWPW-2	9/7/06 23:20	492.25	SWPW-1	10/22/06 0:05	464.56
SWPW-2	9/7/06 23:25	492.26	SWPW-1	10/22/06 0:10	464.56
SWPW-2	9/7/06 23:30	491.89	SWPW-1	10/22/06 0:15	464.56
SWPW-2	9/7/06 23:35	491.56	SWPW-1	10/22/06 0:20	464.57
SWPW-2	9/7/06 23:40	492.12	SWPW-1	10/22/06 0:25	464.57
SWPW-2	9/7/06 23:45	492.19	SWPW-1	10/22/06 0:30	464.56
SWPW-2	9/7/06 23:50	491.95	SWPW-1	10/22/06 0:35	464.56

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/7/06 23:55	491.97	SWPW-1	10/22/06 0:40	464.56
SWPW-2	9/8/06 0:00	492.19	SWPW-1	10/22/06 0:45	464.56
SWPW-2	9/8/06 0:05	491.72	SWPW-1	10/22/06 0:50	464.56
SWPW-2	9/8/06 0:10	492.12	SWPW-1	10/22/06 0:55	464.55
SWPW-2	9/8/06 0:15	492.34	SWPW-1	10/22/06 1:00	464.56
SWPW-2	9/8/06 0:20	492.72	SWPW-1	10/22/06 1:05	464.56
SWPW-2	9/8/06 0:25	492.18	SWPW-1	10/22/06 1:10	464.56
SWPW-2	9/8/06 0:30	492.87	SWPW-1	10/22/06 1:15	464.55
SWPW-2	9/8/06 0:35	493.01	SWPW-1	10/22/06 1:20	464.56
SWPW-2	9/8/06 0:40	493.05	SWPW-1	10/22/06 1:25	464.56
SWPW-2	9/8/06 0:45	493.17	SWPW-1	10/22/06 1:30	464.55
SWPW-2	9/8/06 0:50	492.50	SWPW-1	10/22/06 1:35	464.55
SWPW-2	9/8/06 0:55	492.64	SWPW-1	10/22/06 1:40	464.55
SWPW-2	9/8/06 1:00	493.17	SWPW-1	10/22/06 1:45	464.55
SWPW-2	9/8/06 1:05	492.78	SWPW-1	10/22/06 1:50	464.56
SWPW-2	9/8/06 1:10	492.67	SWPW-1	10/22/06 1:55	464.54
SWPW-2	9/8/06 1:15	492.64	SWPW-1	10/22/06 2:00	464.55
SWPW-2	9/8/06 1:20	492.92	SWPW-1	10/22/06 2:05	464.52
SWPW-2	9/8/06 1:25	492.71	SWPW-1	10/22/06 2:10	464.55
SWPW-2	9/8/06 1:30	493.19	SWPW-1	10/22/06 2:15	464.53
SWPW-2	9/8/06 1:35	492.79	SWPW-1	10/22/06 2:20	464.58
SWPW-2	9/8/06 1:40	492.68	SWPW-1	10/22/06 2:25	464.54
SWPW-2	9/8/06 1:45	493.67	SWPW-1	10/22/06 2:30	464.53
SWPW-2	9/8/06 1:50	493.09	SWPW-1	10/22/06 2:35	464.50
SWPW-2	9/8/06 1:55	493.12	SWPW-1	10/22/06 2:40	464.54
SWPW-2	9/8/06 2:00	492.95	SWPW-1	10/22/06 2:45	464.53
SWPW-2	9/8/06 2:05	493.29	SWPW-1	10/22/06 2:50	464.53
SWPW-2	9/8/06 2:10	492.99	SWPW-1	10/22/06 2:55	464.54
SWPW-2	9/8/06 2:15	493.13	SWPW-1	10/22/06 3:00	464.53
SWPW-2	9/8/06 2:20	494.11	SWPW-1	10/22/06 3:05	464.53
SWPW-2	9/8/06 2:25	493.39	SWPW-1	10/22/06 3:10	464.53
SWPW-2	9/8/06 2:30	493.70	SWPW-1	10/22/06 3:15	464.52
SWPW-2	9/8/06 2:35	493.31	SWPW-1	10/22/06 3:20	464.52
SWPW-2	9/8/06 2:40	493.75	SWPW-1	10/22/06 3:25	464.52
SWPW-2	9/8/06 2:45	493.87	SWPW-1	10/22/06 3:30	464.52
SWPW-2	9/8/06 2:50	493.56	SWPW-1	10/22/06 3:35	464.52
SWPW-2	9/8/06 2:55	493.59	SWPW-1	10/22/06 3:40	464.51
SWPW-2	9/8/06 3:00	493.85	SWPW-1	10/22/06 3:45	464.50
SWPW-2	9/8/06 3:05	493.91	SWPW-1	10/22/06 3:50	464.50
SWPW-2	9/8/06 3:10	494.73	SWPW-1	10/22/06 3:55	464.51
SWPW-2	9/8/06 3:15	493.88	SWPW-1	10/22/06 4:00	464.51
SWPW-2	9/8/06 3:20	493.37	SWPW-1	10/22/06 4:05	464.50
SWPW-2	9/8/06 3:25	493.98	SWPW-1	10/22/06 4:10	464.50
SWPW-2	9/8/06 3:30	494.55	SWPW-1	10/22/06 4:15	464.51
SWPW-2	9/8/06 3:35	493.38	SWPW-1	10/22/06 4:20	464.49
SWPW-2	9/8/06 3:40	493.40	SWPW-1	10/22/06 4:25	464.49
SWPW-2	9/8/06 3:45	493.45	SWPW-1	10/22/06 4:30	464.50
SWPW-2	9/8/06 3:50	494.30	SWPW-1	10/22/06 4:35	464.49
SWPW-2	9/8/06 3:55	493.74	SWPW-1	10/22/06 4:40	464.49
SWPW-2	9/8/06 4:00	493.84	SWPW-1	10/22/06 4:45	464.50
SWPW-2	9/8/06 4:05	493.94	SWPW-1	10/22/06 4:50	464.50
SWPW-2	9/8/06 4:10	493.50	SWPW-1	10/22/06 4:55	464.45
SWPW-2	9/8/06 4:15	494.27	SWPW-1	10/22/06 5:00	464.49
SWPW-2	9/8/06 4:20	493.63	SWPW-1	10/22/06 5:05	464.48
SWPW-2	9/8/06 4:25	494.04	SWPW-1	10/22/06 5:10	464.48
SWPW-2	9/8/06 4:30	495.20	SWPW-1	10/22/06 5:15	464.48
SWPW-2	9/8/06 4:35	494.75	SWPW-1	10/22/06 5:20	464.48
SWPW-2	9/8/06 4:40	493.85	SWPW-1	10/22/06 5:25	464.48
SWPW-2	9/8/06 4:45	494.41	SWPW-1	10/22/06 5:30	464.48
SWPW-2	9/8/06 4:50	494.11	SWPW-1	10/22/06 5:35	464.48
SWPW-2	9/8/06 4:55	494.61	SWPW-1	10/22/06 5:40	464.47
SWPW-2	9/8/06 5:00	493.87	SWPW-1	10/22/06 5:45	464.48
SWPW-2	9/8/06 5:05	494.27	SWPW-1	10/22/06 5:50	464.47
SWPW-2	9/8/06 5:10	494.70	SWPW-1	10/22/06 5:55	464.48
SWPW-2	9/8/06 5:15	494.18	SWPW-1	10/22/06 6:00	464.47
SWPW-2	9/8/06 5:20	495.21	SWPW-1	10/22/06 6:05	464.48
SWPW-2	9/8/06 5:25	494.36	SWPW-1	10/22/06 6:10	464.47
SWPW-2	9/8/06 5:30	494.45	SWPW-1	10/22/06 6:15	464.46
SWPW-2	9/8/06 5:35	494.60	SWPW-1	10/22/06 6:20	464.46
SWPW-2	9/8/06 5:40	495.48	SWPW-1	10/22/06 6:25	464.46
SWPW-2	9/8/06 5:45	494.08	SWPW-1	10/22/06 6:30	464.46
SWPW-2	9/8/06 5:50	494.42	SWPW-1	10/22/06 6:35	464.47
SWPW-2	9/8/06 5:55	494.34	SWPW-1	10/22/06 6:40	464.47
SWPW-2	9/8/06 6:00	494.80	SWPW-1	10/22/06 6:45	464.46
SWPW-2	9/8/06 6:05	494.56	SWPW-1	10/22/06 6:50	464.46
SWPW-2	9/8/06 6:10	494.39	SWPW-1	10/22/06 6:55	464.46
SWPW-2	9/8/06 6:15	494.71	SWPW-1	10/22/06 7:00	464.46
SWPW-2	9/8/06 6:20	495.30	SWPW-1	10/22/06 7:05	464.46
SWPW-2	9/8/06 6:25	495.20	SWPW-1	10/22/06 7:10	464.46
SWPW-2	9/8/06 6:30	494.88	SWPW-1	10/22/06 7:15	464.45
SWPW-2	9/8/06 6:35	495.76	SWPW-1	10/22/06 7:20	464.45
SWPW-2	9/8/06 6:40	495.14	SWPW-1	10/22/06 7:25	464.42
SWPW-2	9/8/06 6:45	494.54	SWPW-1	10/22/06 7:30	464.45
SWPW-2	9/8/06 6:50	494.07	SWPW-1	10/22/06 7:35	464.46
SWPW-2	9/8/06 6:55	494.43	SWPW-1	10/22/06 7:40	464.47
SWPW-2	9/8/06 7:00	494.98	SWPW-1	10/22/06 7:45	464.45
SWPW-2	9/8/06 7:05	495.02	SWPW-1	10/22/06 7:50	464.47
SWPW-2	9/8/06 7:10	495.28	SWPW-1	10/22/06 7:55	464.46
SWPW-2	9/8/06 7:15	494.58	SWPW-1	10/22/06 8:00	464.45
SWPW-2	9/8/06 7:20	495.00	SWPW-1	10/22/06 8:05	464.46
SWPW-2	9/8/06 7:25	495.14	SWPW-1	10/22/06 8:10	464.45
SWPW-2	9/8/06 7:30	495.09	SWPW-1	10/22/06 8:15	464.45
SWPW-2	9/8/06 7:35	495.45	SWPW-1	10/22/06 8:20	464.45
SWPW-2	9/8/06 7:40	495.19	SWPW-1	10/22/06 8:25	464.46
SWPW-2	9/8/06 7:45	494.98	SWPW-1	10/22/06 8:30	464.46
SWPW-2	9/8/06 7:50	495.02	SWPW-1	10/22/06 8:35	464.46
SWPW-2	9/8/06 7:55	494.78	SWPW-1	10/22/06 8:40	464.45
SWPW-2	9/8/06 8:00	495.50	SWPW-1	10/22/06 8:45	464.46
SWPW-2	9/8/06 8:05	495.15	SWPW-1	10/22/06 8:50	464.46
SWPW-2	9/8/06 8:10	495.88	SWPW-1	10/22/06 8:55	464.46

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/8/06 8:15	495.63	SWPW-1	10/22/06 9:00	464.46
SWPW-2	9/8/06 8:20	495.95	SWPW-1	10/22/06 9:05	464.47
SWPW-2	9/8/06 8:25	495.88	SWPW-1	10/22/06 9:10	464.48
SWPW-2	9/8/06 8:30	495.60	SWPW-1	10/22/06 9:15	464.46
SWPW-2	9/8/06 8:35	495.77	SWPW-1	10/22/06 9:20	464.46
SWPW-2	9/8/06 8:40	496.07	SWPW-1	10/22/06 9:25	464.45
SWPW-2	9/8/06 8:45	494.09	SWPW-1	10/22/06 9:30	464.47
SWPW-2	9/8/06 8:50	496.54	SWPW-1	10/22/06 9:35	464.46
SWPW-2	9/8/06 8:55	495.57	SWPW-1	10/22/06 9:40	464.46
SWPW-2	9/8/06 9:00	495.95	SWPW-1	10/22/06 9:45	464.45
SWPW-2	9/8/06 9:05	495.84	SWPW-1	10/22/06 9:50	464.46
SWPW-2	9/8/06 9:10	496.05	SWPW-1	10/22/06 9:55	464.46
SWPW-2	9/8/06 9:15	496.67	SWPW-1	10/22/06 10:00	464.45
SWPW-2	9/8/06 9:20	495.87	SWPW-1	10/22/06 10:05	464.45
SWPW-2	9/8/06 9:25	496.41	SWPW-1	10/22/06 10:10	464.46
SWPW-2	9/8/06 9:30	496.05	SWPW-1	10/22/06 10:15	464.46
SWPW-2	9/8/06 9:35	496.19	SWPW-1	10/22/06 10:20	464.46
SWPW-2	9/8/06 9:40	496.22	SWPW-1	10/22/06 10:25	464.45
SWPW-2	9/8/06 9:45	496.03	SWPW-1	10/22/06 10:30	464.48
SWPW-2	9/8/06 9:50	495.86	SWPW-1	10/22/06 10:35	464.45
SWPW-2	9/8/06 9:55	495.84	SWPW-1	10/22/06 10:40	464.45
SWPW-2	9/8/06 10:00	495.94	SWPW-1	10/22/06 10:45	464.45
SWPW-2	9/8/06 10:05	495.97	SWPW-1	10/22/06 10:50	464.45
SWPW-2	9/8/06 10:10	496.59	SWPW-1	10/22/06 10:55	464.46
SWPW-2	9/8/06 10:15	496.03	SWPW-1	10/22/06 11:00	464.46
SWPW-2	9/8/06 10:20	496.26	SWPW-1	10/22/06 11:05	464.49
SWPW-2	9/8/06 10:25	496.10	SWPW-1	10/22/06 11:10	464.44
SWPW-2	9/8/06 10:30	496.19	SWPW-1	10/22/06 11:15	464.45
SWPW-2	9/8/06 10:35	496.34	SWPW-1	10/22/06 11:20	464.47
SWPW-2	9/8/06 10:40	495.98	SWPW-1	10/22/06 11:25	464.46
SWPW-2	9/8/06 10:45	496.20	SWPW-1	10/22/06 11:30	464.46
SWPW-2	9/8/06 10:50	496.60	SWPW-1	10/22/06 11:35	464.45
SWPW-2	9/8/06 10:55	496.38	SWPW-1	10/22/06 11:40	464.45
SWPW-2	9/8/06 11:00	497.10	SWPW-1	10/22/06 11:45	464.45
SWPW-2	9/8/06 11:05	496.69	SWPW-1	10/22/06 11:50	464.46
SWPW-2	9/8/06 11:10	496.98	SWPW-1	10/22/06 11:55	464.45
SWPW-2	9/8/06 11:15	496.20	SWPW-1	10/22/06 12:00	464.44
SWPW-2	9/8/06 11:20	497.06	SWPW-1	10/22/06 12:05	464.44
SWPW-2	9/8/06 11:25	496.23	SWPW-1	10/22/06 12:10	464.48
SWPW-2	9/8/06 11:30	496.81	SWPW-1	10/22/06 12:15	464.45
SWPW-2	9/8/06 11:35	496.43	SWPW-1	10/22/06 12:20	464.44
SWPW-2	9/8/06 11:40	496.72	SWPW-1	10/22/06 12:25	464.44
SWPW-2	9/8/06 11:45	496.50	SWPW-1	10/22/06 12:30	464.44
SWPW-2	9/8/06 11:50	496.18	SWPW-1	10/22/06 12:35	464.45
SWPW-2	9/8/06 11:55	496.34	SWPW-1	10/22/06 12:40	464.44
SWPW-2	9/8/06 12:00	496.99	SWPW-1	10/22/06 12:45	464.44
SWPW-2	9/8/06 12:05	496.97	SWPW-1	10/22/06 12:50	464.45
SWPW-2	9/8/06 12:10	495.90	SWPW-1	10/22/06 12:55	464.43
SWPW-2	9/8/06 12:15	496.96	SWPW-1	10/22/06 13:00	464.44
SWPW-2	9/8/06 12:20	497.29	SWPW-1	10/22/06 13:05	464.44
SWPW-2	9/8/06 12:25	497.51	SWPW-1	10/22/06 13:10	464.44
SWPW-2	9/8/06 12:30	496.69	SWPW-1	10/22/06 13:15	464.43
SWPW-2	9/8/06 12:35	496.94	SWPW-1	10/22/06 13:20	464.43
SWPW-2	9/8/06 12:40	496.96	SWPW-1	10/22/06 13:25	464.43
SWPW-2	9/8/06 12:45	497.74	SWPW-1	10/22/06 13:30	464.43
SWPW-2	9/8/06 12:50	497.60	SWPW-1	10/22/06 13:35	464.42
SWPW-2	9/8/06 12:55	497.41	SWPW-1	10/22/06 13:40	464.42
SWPW-2	9/8/06 13:00	497.02	SWPW-1	10/22/06 13:45	464.41
SWPW-2	9/8/06 13:05	497.35	SWPW-1	10/22/06 13:50	464.42
SWPW-2	9/8/06 13:10	497.67	SWPW-1	10/22/06 13:55	464.40
SWPW-2	9/8/06 13:15	497.43	SWPW-1	10/22/06 14:00	464.42
SWPW-2	9/8/06 13:20	496.87	SWPW-1	10/22/06 14:05	464.41
SWPW-2	9/8/06 13:25	497.01	SWPW-1	10/22/06 14:10	464.43
SWPW-2	9/8/06 13:30	497.56	SWPW-1	10/22/06 14:15	464.40
SWPW-2	9/8/06 13:35	496.89	SWPW-1	10/22/06 14:20	464.41
SWPW-2	9/8/06 13:40	497.30	SWPW-1	10/22/06 14:25	464.41
SWPW-2	9/8/06 13:45	497.75	SWPW-1	10/22/06 14:30	464.41
SWPW-2	9/8/06 13:50	496.94	SWPW-1	10/22/06 14:35	464.42
SWPW-2	9/8/06 13:55	497.49	SWPW-1	10/22/06 14:40	464.40
SWPW-2	9/8/06 14:00	496.94	SWPW-1	10/22/06 14:45	464.40
SWPW-2	9/8/06 14:05	497.25	SWPW-1	10/22/06 14:50	464.45
SWPW-2	9/8/06 14:10	497.19	SWPW-1	10/22/06 14:55	464.40
SWPW-2	9/8/06 14:15	497.50	SWPW-1	10/22/06 15:00	464.42
SWPW-2	9/8/06 14:20	497.31	SWPW-1	10/22/06 15:05	464.40
SWPW-2	9/8/06 14:25	498.08	SWPW-1	10/22/06 15:10	464.40
SWPW-2	9/8/06 14:30	496.95	SWPW-1	10/22/06 15:15	464.39
SWPW-2	9/8/06 14:35	496.80	SWPW-1	10/22/06 15:20	464.38
SWPW-2	9/8/06 14:40	497.44	SWPW-1	10/22/06 15:25	464.39
SWPW-2	9/8/06 14:45	497.06	SWPW-1	10/22/06 15:30	464.39
SWPW-2	9/8/06 14:50	497.53	SWPW-1	10/22/06 15:35	464.38
SWPW-2	9/8/06 14:55	497.97	SWPW-1	10/22/06 15:40	464.39
SWPW-2	9/8/06 15:00	497.42	SWPW-1	10/22/06 15:45	464.39
SWPW-2	9/8/06 15:05	497.23	SWPW-1	10/22/06 15:50	464.39
SWPW-2	9/8/06 15:10	497.35	SWPW-1	10/22/06 15:55	464.39
SWPW-2	9/8/06 15:15	497.94	SWPW-1	10/22/06 16:00	464.38
SWPW-2	9/8/06 15:20	497.34	SWPW-1	10/22/06 16:05	464.38
SWPW-2	9/8/06 15:25	497.61	SWPW-1	10/22/06 16:10	464.38
SWPW-2	9/8/06 15:30	497.03	SWPW-1	10/22/06 16:15	464.38
SWPW-2	9/8/06 15:35	497.40	SWPW-1	10/22/06 16:20	464.39
SWPW-2	9/8/06 15:40	497.42	SWPW-1	10/22/06 16:25	464.37
SWPW-2	9/8/06 15:45	497.89	SWPW-1	10/22/06 16:30	464.38
SWPW-2	9/8/06 15:50	497.81	SWPW-1	10/22/06 16:35	464.37
SWPW-2	9/8/06 15:55	497.11	SWPW-1	10/22/06 16:40	464.37
SWPW-2	9/8/06 16:00	498.24	SWPW-1	10/22/06 16:45	464.38
SWPW-2	9/8/06 16:05	497.53	SWPW-1	10/22/06 16:50	464.37
SWPW-2	9/8/06 16:10	497.92	SWPW-1	10/22/06 16:55	464.37
SWPW-2	9/8/06 16:15	497.98	SWPW-1	10/22/06 17:00	464.36
SWPW-2	9/8/06 16:20	498.22	SWPW-1	10/22/06 17:05	464.37
SWPW-2	9/8/06 16:25	497.83	SWPW-1	10/22/06 17:10	464.38
SWPW-2	9/8/06 16:30	497.82	SWPW-1	10/22/06 17:15	464.36

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/8/06 16:35	497.47	SWPW-1	10/22/06 17:20	464.37
SWPW-2	9/8/06 16:40	497.35	SWPW-1	10/22/06 17:25	464.37
SWPW-2	9/8/06 16:45	497.62	SWPW-1	10/22/06 17:30	464.36
SWPW-2	9/8/06 16:50	497.92	SWPW-1	10/22/06 17:35	464.36
SWPW-2	9/8/06 16:55	498.04	SWPW-1	10/22/06 17:40	464.35
SWPW-2	9/8/06 17:00	497.77	SWPW-1	10/22/06 17:45	464.35
SWPW-2	9/8/06 17:05	498.04	SWPW-1	10/22/06 17:50	464.35
SWPW-2	9/8/06 17:10	498.08	SWPW-1	10/22/06 17:55	464.36
SWPW-2	9/8/06 17:15	498.05	SWPW-1	10/22/06 18:00	464.36
SWPW-2	9/8/06 17:20	497.27	SWPW-1	10/22/06 18:05	464.35
SWPW-2	9/8/06 17:25	498.20	SWPW-1	10/22/06 18:10	464.35
SWPW-2	9/8/06 17:30	498.04	SWPW-1	10/22/06 18:15	464.36
SWPW-2	9/8/06 17:35	497.82	SWPW-1	10/22/06 18:20	464.36
SWPW-2	9/8/06 17:40	497.96	SWPW-1	10/22/06 18:25	464.35
SWPW-2	9/8/06 17:45	498.34	SWPW-1	10/22/06 18:30	464.35
SWPW-2	9/8/06 17:50	498.42	SWPW-1	10/22/06 18:35	464.38
SWPW-2	9/8/06 17:55	498.33	SWPW-1	10/22/06 18:40	464.35
SWPW-2	9/8/06 18:00	497.86	SWPW-1	10/22/06 18:45	464.35
SWPW-2	9/8/06 18:05	498.37	SWPW-1	10/22/06 18:50	464.34
SWPW-2	9/8/06 18:10	498.04	SWPW-1	10/22/06 18:55	464.34
SWPW-2	9/8/06 18:15	498.40	SWPW-1	10/22/06 19:00	464.36
SWPW-2	9/8/06 18:20	497.34	SWPW-1	10/22/06 19:05	464.35
SWPW-2	9/8/06 18:25	498.07	SWPW-1	10/22/06 19:10	464.34
SWPW-2	9/8/06 18:30	498.22	SWPW-1	10/22/06 19:15	464.35
SWPW-2	9/8/06 18:35	498.44	SWPW-1	10/22/06 19:20	464.34
SWPW-2	9/8/06 18:40	498.11	SWPW-1	10/22/06 19:25	464.35
SWPW-2	9/8/06 18:45	498.63	SWPW-1	10/22/06 19:30	464.38
SWPW-2	9/8/06 18:50	498.19	SWPW-1	10/22/06 19:35	464.36
SWPW-2	9/8/06 18:55	498.25	SWPW-1	10/22/06 19:40	464.36
SWPW-2	9/8/06 19:00	498.32	SWPW-1	10/22/06 19:45	464.35
SWPW-2	9/8/06 19:05	498.80	SWPW-1	10/22/06 19:50	464.35
SWPW-2	9/8/06 19:10	498.47	SWPW-1	10/22/06 19:55	464.35
SWPW-2	9/8/06 19:15	497.58	SWPW-1	10/22/06 20:00	464.35
SWPW-2	9/8/06 19:20	498.50	SWPW-1	10/22/06 20:05	464.34
SWPW-2	9/8/06 19:25	498.59	SWPW-1	10/22/06 20:10	464.35
SWPW-2	9/8/06 19:30	498.84	SWPW-1	10/22/06 20:15	464.35
SWPW-2	9/8/06 19:35	498.71	SWPW-1	10/22/06 20:20	464.35
SWPW-2	9/8/06 19:40	498.41	SWPW-1	10/22/06 20:25	464.35
SWPW-2	9/8/06 19:45	498.60	SWPW-1	10/22/06 20:30	464.35
SWPW-2	9/8/06 19:50	498.62	SWPW-1	10/22/06 20:35	464.34
SWPW-2	9/8/06 19:55	498.49	SWPW-1	10/22/06 20:40	464.34
SWPW-2	9/8/06 20:00	498.21	SWPW-1	10/22/06 20:45	464.35
SWPW-2	9/8/06 20:05	498.29	SWPW-1	10/22/06 20:50	464.34
SWPW-2	9/8/06 20:10	498.66	SWPW-1	10/22/06 20:55	464.35
SWPW-2	9/8/06 20:15	498.62	SWPW-1	10/22/06 21:00	464.36
SWPW-2	9/8/06 20:20	498.51	SWPW-1	10/22/06 21:05	464.35
SWPW-2	9/8/06 20:25	498.51	SWPW-1	10/22/06 21:10	464.36
SWPW-2	9/8/06 20:30	498.24	SWPW-1	10/22/06 21:15	464.38
SWPW-2	9/8/06 20:35	498.50	SWPW-1	10/22/06 21:20	464.36
SWPW-2	9/8/06 20:40	497.90	SWPW-1	10/22/06 21:25	464.36
SWPW-2	9/8/06 20:45	498.63	SWPW-1	10/22/06 21:30	464.36
SWPW-2	9/8/06 20:50	498.58	SWPW-1	10/22/06 21:35	464.36
SWPW-2	9/8/06 20:55	498.52	SWPW-1	10/22/06 21:40	464.36
SWPW-2	9/8/06 21:00	498.25	SWPW-1	10/22/06 21:45	464.37
SWPW-2	9/8/06 21:05	498.67	SWPW-1	10/22/06 21:50	464.37
SWPW-2	9/8/06 21:10	498.63	SWPW-1	10/22/06 21:55	464.33
SWPW-2	9/8/06 21:15	498.48	SWPW-1	10/22/06 22:00	464.36
SWPW-2	9/8/06 21:20	498.34	SWPW-1	10/22/06 22:05	464.36
SWPW-2	9/8/06 21:25	498.58	SWPW-1	10/22/06 22:10	464.36
SWPW-2	9/8/06 21:30	498.34	SWPW-1	10/22/06 22:15	464.35
SWPW-2	9/8/06 21:35	498.29	SWPW-1	10/22/06 22:20	464.36
SWPW-2	9/8/06 21:40	498.58	SWPW-1	10/22/06 22:25	464.36
SWPW-2	9/8/06 21:45	498.85	SWPW-1	10/22/06 22:30	464.36
SWPW-2	9/8/06 21:50	498.65	SWPW-1	10/22/06 22:35	464.37
SWPW-2	9/8/06 21:55	498.65	SWPW-1	10/22/06 22:40	464.37
SWPW-2	9/8/06 22:00	498.75	SWPW-1	10/22/06 22:45	464.41
SWPW-2	9/8/06 22:05	498.34	SWPW-1	10/22/06 22:50	464.37
SWPW-2	9/8/06 22:10	498.09	SWPW-1	10/22/06 22:55	464.36
SWPW-2	9/8/06 22:15	499.32	SWPW-1	10/22/06 23:00	464.38
SWPW-2	9/8/06 22:20	498.77	SWPW-1	10/22/06 23:05	464.36
SWPW-2	9/8/06 22:25	498.98	SWPW-1	10/22/06 23:10	464.36
SWPW-2	9/8/06 22:30	498.50	SWPW-1	10/22/06 23:15	464.36
SWPW-2	9/8/06 22:35	498.08	SWPW-1	10/22/06 23:20	464.37
SWPW-2	9/8/06 22:40	498.26	SWPW-1	10/22/06 23:25	464.38
SWPW-2	9/8/06 22:45	498.53	SWPW-1	10/22/06 23:30	464.38
SWPW-2	9/8/06 22:50	498.47	SWPW-1	10/22/06 23:35	464.37
SWPW-2	9/8/06 22:55	498.95	SWPW-1	10/22/06 23:40	464.36
SWPW-2	9/8/06 23:00	498.68	SWPW-1	10/22/06 23:45	464.37
SWPW-2	9/8/06 23:05	499.03	SWPW-1	10/22/06 23:50	464.36
SWPW-2	9/8/06 23:10	498.70	SWPW-1	10/22/06 23:55	464.36
SWPW-2	9/8/06 23:15	499.12	SWPW-1	10/23/06 0:00	464.36
SWPW-2	9/8/06 23:20	498.49	SWPW-1	10/23/06 0:05	464.36
SWPW-2	9/8/06 23:25	499.19	SWPW-1	10/23/06 0:10	464.36
SWPW-2	9/8/06 23:30	498.96	SWPW-1	10/23/06 0:15	464.36
SWPW-2	9/8/06 23:35	499.24	SWPW-1	10/23/06 0:20	464.40
SWPW-2	9/8/06 23:40	498.89	SWPW-1	10/23/06 0:25	464.37
SWPW-2	9/8/06 23:45	498.72	SWPW-1	10/23/06 0:30	464.36
SWPW-2	9/8/06 23:50	498.39	SWPW-1	10/23/06 0:35	464.36
SWPW-2	9/8/06 23:55	498.34	SWPW-1	10/23/06 0:40	464.35
SWPW-2	9/9/06 0:00	499.21	SWPW-1	10/23/06 0:45	464.35
SWPW-2	9/9/06 0:05	499.02	SWPW-1	10/23/06 0:50	464.37
SWPW-2	9/9/06 0:10	499.10	SWPW-1	10/23/06 0:55	464.36
SWPW-2	9/9/06 0:15	498.84	SWPW-1	10/23/06 1:00	464.35
SWPW-2	9/9/06 0:20	499.16	SWPW-1	10/23/06 1:05	464.35
SWPW-2	9/9/06 0:25	499.26	SWPW-1	10/23/06 1:10	464.36
SWPW-2	9/9/06 0:30	499.18	SWPW-1	10/23/06 1:15	464.36
SWPW-2	9/9/06 0:35	499.29	SWPW-1	10/23/06 1:20	464.36
SWPW-2	9/9/06 0:40	499.00	SWPW-1	10/23/06 1:25	464.36
SWPW-2	9/9/06 0:45	499.43	SWPW-1	10/23/06 1:30	464.36
SWPW-2	9/9/06 0:50	499.06	SWPW-1	10/23/06 1:35	464.35

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/9/06 0:55	499.12	SWPW-1	10/23/06 1:40	464.36
SWPW-2	9/9/06 1:00	499.10	SWPW-1	10/23/06 1:45	464.35
SWPW-2	9/9/06 1:05	498.91	SWPW-1	10/23/06 1:50	464.35
SWPW-2	9/9/06 1:10	499.11	SWPW-1	10/23/06 1:55	464.35
SWPW-2	9/9/06 1:15	499.12	SWPW-1	10/23/06 2:00	464.34
SWPW-2	9/9/06 1:20	499.82	SWPW-1	10/23/06 2:05	464.35
SWPW-2	9/9/06 1:25	499.41	SWPW-1	10/23/06 2:10	464.34
SWPW-2	9/9/06 1:30	499.12	SWPW-1	10/23/06 2:15	464.37
SWPW-2	9/9/06 1:35	499.42	SWPW-1	10/23/06 2:20	464.34
SWPW-2	9/9/06 1:40	499.51	SWPW-1	10/23/06 2:25	464.34
SWPW-2	9/9/06 1:45	498.81	SWPW-1	10/23/06 2:30	464.34
SWPW-2	9/9/06 1:50	499.28	SWPW-1	10/23/06 2:35	464.35
SWPW-2	9/9/06 1:55	499.78	SWPW-1	10/23/06 2:40	464.33
SWPW-2	9/9/06 2:00	499.41	SWPW-1	10/23/06 2:45	464.34
SWPW-2	9/9/06 2:05	499.03	SWPW-1	10/23/06 2:50	464.34
SWPW-2	9/9/06 2:10	499.16	SWPW-1	10/23/06 2:55	464.34
SWPW-2	9/9/06 2:15	499.87	SWPW-1	10/23/06 3:00	464.33
SWPW-2	9/9/06 2:20	499.04	SWPW-1	10/23/06 3:05	464.33
SWPW-2	9/9/06 2:25	499.46	SWPW-1	10/23/06 3:10	464.33
SWPW-2	9/9/06 2:30	499.47	SWPW-1	10/23/06 3:15	464.32
SWPW-2	9/9/06 2:35	499.33	SWPW-1	10/23/06 3:20	464.33
SWPW-2	9/9/06 2:40	499.59	SWPW-1	10/23/06 3:25	464.32
SWPW-2	9/9/06 2:45	499.73	SWPW-1	10/23/06 3:30	464.33
SWPW-2	9/9/06 2:50	499.52	SWPW-1	10/23/06 3:35	464.31
SWPW-2	9/9/06 2:55	499.65	SWPW-1	10/23/06 3:40	464.33
SWPW-2	9/9/06 3:00	499.59	SWPW-1	10/23/06 3:45	464.31
SWPW-2	9/9/06 3:05	500.09	SWPW-1	10/23/06 3:50	464.31
SWPW-2	9/9/06 3:10	499.30	SWPW-1	10/23/06 3:55	464.31
SWPW-2	9/9/06 3:15	499.34	SWPW-1	10/23/06 4:00	464.30
SWPW-2	9/9/06 3:20	499.66	SWPW-1	10/23/06 4:05	464.30
SWPW-2	9/9/06 3:25	500.17	SWPW-1	10/23/06 4:10	464.31
SWPW-2	9/9/06 3:30	499.62	SWPW-1	10/23/06 4:15	464.30
SWPW-2	9/9/06 3:35	499.80	SWPW-1	10/23/06 4:20	464.29
SWPW-2	9/9/06 3:40	499.70	SWPW-1	10/23/06 4:25	464.30
SWPW-2	9/9/06 3:45	499.78	SWPW-1	10/23/06 4:30	464.30
SWPW-2	9/9/06 3:50	499.84	SWPW-1	10/23/06 4:35	464.29
SWPW-2	9/9/06 3:55	499.55	SWPW-1	10/23/06 4:40	464.29
SWPW-2	9/9/06 4:00	499.60	SWPW-1	10/23/06 4:45	464.30
SWPW-2	9/9/06 4:05	499.77	SWPW-1	10/23/06 4:50	464.29
SWPW-2	9/9/06 4:10	499.98	SWPW-1	10/23/06 4:55	464.32
SWPW-2	9/9/06 4:15	500.38	SWPW-1	10/23/06 5:00	464.30
SWPW-2	9/9/06 4:20	500.26	SWPW-1	10/23/06 5:05	464.30
SWPW-2	9/9/06 4:25	499.63	SWPW-1	10/23/06 5:10	464.29
SWPW-2	9/9/06 4:30	499.81	SWPW-1	10/23/06 5:15	464.29
SWPW-2	9/9/06 4:35	499.36	SWPW-1	10/23/06 5:20	464.29
SWPW-2	9/9/06 4:40	499.48	SWPW-1	10/23/06 5:25	464.28
SWPW-2	9/9/06 4:45	499.75	SWPW-1	10/23/06 5:30	464.28
SWPW-2	9/9/06 4:50	499.81	SWPW-1	10/23/06 5:35	464.33
SWPW-2	9/9/06 4:55	500.38	SWPW-1	10/23/06 5:40	464.27
SWPW-2	9/9/06 5:00	499.54	SWPW-1	10/23/06 5:45	464.29
SWPW-2	9/9/06 5:05	500.36	SWPW-1	10/23/06 5:50	464.31
SWPW-2	9/9/06 5:10	499.82	SWPW-1	10/23/06 5:55	464.28
SWPW-2	9/9/06 5:15	499.31	SWPW-1	10/23/06 6:00	464.29
SWPW-2	9/9/06 5:20	498.99	SWPW-1	10/23/06 6:05	464.28
SWPW-2	9/9/06 5:25	499.93	SWPW-1	10/23/06 6:10	464.28
SWPW-2	9/9/06 5:30	500.31	SWPW-1	10/23/06 6:15	464.27
SWPW-2	9/9/06 5:35	499.66	SWPW-1	10/23/06 6:20	464.28
SWPW-2	9/9/06 5:40	499.88	SWPW-1	10/23/06 6:25	464.27
SWPW-2	9/9/06 5:45	500.13	SWPW-1	10/23/06 6:30	464.27
SWPW-2	9/9/06 5:50	500.31	SWPW-1	10/23/06 6:35	464.28
SWPW-2	9/9/06 5:55	499.92	SWPW-1	10/23/06 6:40	464.27
SWPW-2	9/9/06 6:00	499.72	SWPW-1	10/23/06 6:45	464.26
SWPW-2	9/9/06 6:05	499.75	SWPW-1	10/23/06 6:50	464.27
SWPW-2	9/9/06 6:10	499.84	SWPW-1	10/23/06 6:55	464.27
SWPW-2	9/9/06 6:15	500.14	SWPW-1	10/23/06 7:00	464.30
SWPW-2	9/9/06 6:20	499.90	SWPW-1	10/23/06 7:05	464.26
SWPW-2	9/9/06 6:25	499.80	SWPW-1	10/23/06 7:10	464.23
SWPW-2	9/9/06 6:30	499.69	SWPW-1	10/23/06 7:15	464.26
SWPW-2	9/9/06 6:35	500.25	SWPW-1	10/23/06 7:20	464.25
SWPW-2	9/9/06 6:40	500.05	SWPW-1	10/23/06 7:25	464.25
SWPW-2	9/9/06 6:45	500.43	SWPW-1	10/23/06 7:30	464.28
SWPW-2	9/9/06 6:50	500.05	SWPW-1	10/23/06 7:35	464.26
SWPW-2	9/9/06 6:55	499.96	SWPW-1	10/23/06 7:40	464.29
SWPW-2	9/9/06 7:00	500.05	SWPW-1	10/23/06 7:45	464.26
SWPW-2	9/9/06 7:05	499.82	SWPW-1	10/23/06 7:50	464.25
SWPW-2	9/9/06 7:10	500.68	SWPW-1	10/23/06 7:55	464.30
SWPW-2	9/9/06 7:15	499.97	SWPW-1	10/23/06 8:00	464.25
SWPW-2	9/9/06 7:20	500.31	SWPW-1	10/23/06 8:05	464.24
SWPW-2	9/9/06 7:25	500.49	SWPW-1	10/23/06 8:10	464.25
SWPW-2	9/9/06 7:30	500.34	SWPW-1	10/23/06 8:15	464.26
SWPW-2	9/9/06 7:35	500.46	SWPW-1	10/23/06 8:20	464.28
SWPW-2	9/9/06 7:40	500.11	SWPW-1	10/23/06 8:25	464.25
SWPW-2	9/9/06 7:45	500.70	SWPW-1	10/23/06 8:30	464.25
SWPW-2	9/9/06 7:50	500.13	SWPW-1	10/23/06 8:35	464.25
SWPW-2	9/9/06 7:55	500.02	SWPW-1	10/23/06 8:40	464.25
SWPW-2	9/9/06 8:00	500.44	SWPW-1	10/23/06 8:45	464.25
SWPW-2	9/9/06 8:05	500.08	SWPW-1	10/23/06 8:50	464.25
SWPW-2	9/9/06 8:10	500.30	SWPW-1	10/23/06 8:55	464.25
SWPW-2	9/9/06 8:15	500.31	SWPW-1	10/23/06 9:00	464.25
SWPW-2	9/9/06 8:20	501.15	SWPW-1	10/23/06 9:05	464.26
SWPW-2	9/9/06 8:25	500.66	SWPW-1	10/23/06 9:10	464.25
SWPW-2	9/9/06 8:30	500.35	SWPW-1	10/23/06 9:15	464.25
SWPW-2	9/9/06 8:35	500.21	SWPW-1	10/23/06 9:20	464.26
SWPW-2	9/9/06 8:40	500.39	SWPW-1	10/23/06 9:25	464.26
SWPW-2	9/9/06 8:45	500.21	SWPW-1	10/23/06 9:30	464.25
SWPW-2	9/9/06 8:50	500.42	SWPW-1	10/23/06 9:35	464.25
SWPW-2	9/9/06 8:55	500.32	SWPW-1	10/23/06 9:40	464.25
SWPW-2	9/9/06 9:00	500.19	SWPW-1	10/23/06 9:45	464.25
SWPW-2	9/9/06 9:05	500.19	SWPW-1	10/23/06 9:50	464.25
SWPW-2	9/9/06 9:10	500.44	SWPW-1	10/23/06 9:55	464.22

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/9/06 9:15	499.87	SWPW-1	10/23/06 10:00	464.26
SWPW-2	9/9/06 9:20	500.25	SWPW-1	10/23/06 10:05	464.23
SWPW-2	9/9/06 9:25	500.51	SWPW-1	10/23/06 10:10	464.25
SWPW-2	9/9/06 9:30	500.30	SWPW-1	10/23/06 10:15	464.24
SWPW-2	9/9/06 9:35	500.16	SWPW-1	10/23/06 10:20	464.24
SWPW-2	9/9/06 9:40	499.86	SWPW-1	10/23/06 10:25	464.28
SWPW-2	9/9/06 9:45	500.00	SWPW-1	10/23/06 10:30	464.25
SWPW-2	9/9/06 9:50	499.68	SWPW-1	10/23/06 10:35	464.25
SWPW-2	9/9/06 9:55	500.31	SWPW-1	10/23/06 10:40	464.24
SWPW-2	9/9/06 10:00	500.31	SWPW-1	10/23/06 10:45	464.24
SWPW-2	9/9/06 10:05	500.82	SWPW-1	10/23/06 10:50	464.25
SWPW-2	9/9/06 10:10	500.53	SWPW-1	10/23/06 10:55	464.23
SWPW-2	9/9/06 10:15	500.36	SWPW-1	10/23/06 11:00	464.23
SWPW-2	9/9/06 10:20	500.51	SWPW-1	10/23/06 11:05	464.23
SWPW-2	9/9/06 10:25	501.08	SWPW-1	10/23/06 11:10	464.24
SWPW-2	9/9/06 10:30	500.07	SWPW-1	10/23/06 11:15	464.24
SWPW-2	9/9/06 10:35	500.09	SWPW-1	10/23/06 11:20	464.24
SWPW-2	9/9/06 10:40	500.82	SWPW-1	10/23/06 11:25	464.24
SWPW-2	9/9/06 10:45	500.68	SWPW-1	10/23/06 11:30	464.24
SWPW-2	9/9/06 10:50	501.35	SWPW-1	10/23/06 11:35	464.24
SWPW-2	9/9/06 10:55	500.71	SWPW-1	10/23/06 11:40	464.25
SWPW-2	9/9/06 11:00	500.83	SWPW-1	10/23/06 11:45	464.24
SWPW-2	9/9/06 11:05	500.35	SWPW-1	10/23/06 11:50	464.24
SWPW-2	9/9/06 11:10	500.86	SWPW-1	10/23/06 11:55	464.25
SWPW-2	9/9/06 11:15	501.10	SWPW-1	10/23/06 12:00	464.23
SWPW-2	9/9/06 11:20	500.70	SWPW-1	10/23/06 12:05	464.24
SWPW-2	9/9/06 11:25	500.96	SWPW-1	10/23/06 12:10	464.24
SWPW-2	9/9/06 11:30	500.76	SWPW-1	10/23/06 12:15	464.24
SWPW-2	9/9/06 11:35	501.14	SWPW-1	10/23/06 12:20	464.24
SWPW-2	9/9/06 11:40	500.68	SWPW-1	10/23/06 12:25	464.27
SWPW-2	9/9/06 11:45	501.28	SWPW-1	10/23/06 12:30	464.23
SWPW-2	9/9/06 11:50	501.28	SWPW-1	10/23/06 12:35	464.24
SWPW-2	9/9/06 11:55	501.29	SWPW-1	10/23/06 12:40	464.23
SWPW-2	9/9/06 12:00	500.64	SWPW-1	10/23/06 12:45	464.23
SWPW-2	9/9/06 12:05	501.03	SWPW-1	10/23/06 12:50	464.23
SWPW-2	9/9/06 12:10	500.86	SWPW-1	10/23/06 12:55	464.23
SWPW-2	9/9/06 12:15	501.15	SWPW-1	10/23/06 13:00	464.26
SWPW-2	9/9/06 12:20	500.90	SWPW-1	10/23/06 13:05	464.23
SWPW-2	9/9/06 12:25	501.06	SWPW-1	10/23/06 13:10	464.23
SWPW-2	9/9/06 12:30	500.90	SWPW-1	10/23/06 13:15	464.23
SWPW-2	9/9/06 12:35	501.52	SWPW-1	10/23/06 13:20	464.23
SWPW-2	9/9/06 12:40	501.11	SWPW-1	10/23/06 13:25	464.22
SWPW-2	9/9/06 12:45	501.04	SWPW-1	10/23/06 13:30	464.22
SWPW-2	9/9/06 12:50	500.98	SWPW-1	10/23/06 13:35	464.22
SWPW-2	9/9/06 12:55	502.19	SWPW-1	10/23/06 13:40	464.22
SWPW-2	9/9/06 13:00	501.57	SWPW-1	10/23/06 13:45	464.23
SWPW-2	9/9/06 13:05	501.57	SWPW-1	10/23/06 13:50	464.21
SWPW-2	9/9/06 13:10	501.13	SWPW-1	10/23/06 13:55	464.21
SWPW-2	9/9/06 13:15	501.16	SWPW-1	10/23/06 14:00	464.21
SWPW-2	9/9/06 13:20	501.04	SWPW-1	10/23/06 14:05	464.22
SWPW-2	9/9/06 13:25	501.13	SWPW-1	10/23/06 14:10	464.21
SWPW-2	9/9/06 13:30	501.11	SWPW-1	10/23/06 14:15	464.25
SWPW-2	9/9/06 13:35	501.71	SWPW-1	10/23/06 14:20	464.21
SWPW-2	9/9/06 13:40	501.36	SWPW-1	10/23/06 14:25	464.22
SWPW-2	9/9/06 13:45	501.43	SWPW-1	10/23/06 14:30	464.22
SWPW-2	9/9/06 13:50	501.31	SWPW-1	10/23/06 14:35	464.21
SWPW-2	9/9/06 13:55	501.16	SWPW-1	10/23/06 14:40	464.23
SWPW-2	9/9/06 14:00	500.95	SWPW-1	10/23/06 14:45	464.20
SWPW-2	9/9/06 14:05	501.69	SWPW-1	10/23/06 14:50	464.21
SWPW-2	9/9/06 14:10	500.78	SWPW-1	10/23/06 14:55	464.20
SWPW-2	9/9/06 14:15	501.40	SWPW-1	10/23/06 15:00	464.24
SWPW-2	9/9/06 14:20	501.99	SWPW-1	10/23/06 15:05	464.21
SWPW-2	9/9/06 14:25	501.59	SWPW-1	10/23/06 15:10	464.20
SWPW-2	9/9/06 14:30	501.93	SWPW-1	10/23/06 15:15	464.21
SWPW-2	9/9/06 14:35	501.38	SWPW-1	10/23/06 15:20	464.21
SWPW-2	9/9/06 14:40	501.11	SWPW-1	10/23/06 15:25	464.20
SWPW-2	9/9/06 14:45	501.20	SWPW-1	10/23/06 15:30	464.21
SWPW-2	9/9/06 14:50	501.79	SWPW-1	10/23/06 15:35	464.20
SWPW-2	9/9/06 14:55	501.52	SWPW-1	10/23/06 15:40	464.20
SWPW-2	9/9/06 15:00	501.00	SWPW-1	10/23/06 15:45	464.21
SWPW-2	9/9/06 15:05	500.77	SWPW-1	10/23/06 15:50	464.21
SWPW-2	9/9/06 15:10	501.33	SWPW-1	10/23/06 15:55	464.23
SWPW-2	9/9/06 15:15	501.90	SWPW-1	10/23/06 16:00	464.19
SWPW-2	9/9/06 15:20	502.00	SWPW-1	10/23/06 16:05	464.24
SWPW-2	9/9/06 15:25	501.66	SWPW-1	10/23/06 16:10	464.21
SWPW-2	9/9/06 15:30	502.13	SWPW-1	10/23/06 16:15	464.20
SWPW-2	9/9/06 15:35	501.36	SWPW-1	10/23/06 16:20	464.19
SWPW-2	9/9/06 15:40	501.45	SWPW-1	10/23/06 16:25	464.19
SWPW-2	9/9/06 15:45	501.09	SWPW-1	10/23/06 16:30	464.18
SWPW-2	9/9/06 15:50	501.70	SWPW-1	10/23/06 16:35	464.18
SWPW-2	9/9/06 15:55	500.93	SWPW-1	10/23/06 16:40	464.19
SWPW-2	9/9/06 16:00	501.44	SWPW-1	10/23/06 16:45	464.22
SWPW-2	9/9/06 16:05	501.57	SWPW-1	10/23/06 16:50	464.18
SWPW-2	9/9/06 16:10	501.12	SWPW-1	10/23/06 16:55	464.18
SWPW-2	9/9/06 16:15	501.87	SWPW-1	10/23/06 17:00	464.22
SWPW-2	9/9/06 16:20	501.64	SWPW-1	10/23/06 17:05	464.18
SWPW-2	9/9/06 16:25	501.01	SWPW-1	10/23/06 17:10	464.17
SWPW-2	9/9/06 16:30	501.58	SWPW-1	10/23/06 17:15	464.19
SWPW-2	9/9/06 16:35	501.16	SWPW-1	10/23/06 17:20	464.17
SWPW-2	9/9/06 16:40	501.60	SWPW-1	10/23/06 17:25	464.18
SWPW-2	9/9/06 16:45	501.53	SWPW-1	10/23/06 17:30	464.18
SWPW-2	9/9/06 16:50	501.98	SWPW-1	10/23/06 17:35	464.17
SWPW-2	9/9/06 16:55	501.15	SWPW-1	10/23/06 17:40	464.21
SWPW-2	9/9/06 17:00	501.55	SWPW-1	10/23/06 17:45	464.17
SWPW-2	9/9/06 17:05	501.03	SWPW-1	10/23/06 17:50	464.18
SWPW-2	9/9/06 17:10	501.60	SWPW-1	10/23/06 17:55	464.17
SWPW-2	9/9/06 17:15	501.27	SWPW-1	10/23/06 18:00	464.17
SWPW-2	9/9/06 17:20	501.67	SWPW-1	10/23/06 18:05	464.16
SWPW-2	9/9/06 17:25	501.16	SWPW-1	10/23/06 18:10	464.17
SWPW-2	9/9/06 17:30	501.39	SWPW-1	10/23/06 18:15	464.18

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/9/06 17:35	501.01	SWPW-1	10/23/06 18:20	464.17
SWPW-2	9/9/06 17:40	501.59	SWPW-1	10/23/06 18:25	464.16
SWPW-2	9/9/06 17:45	501.24	SWPW-1	10/23/06 18:30	464.16
SWPW-2	9/9/06 17:50	501.53	SWPW-1	10/23/06 18:35	464.17
SWPW-2	9/9/06 17:55	501.41	SWPW-1	10/23/06 18:40	464.18
SWPW-2	9/9/06 18:00	501.91	SWPW-1	10/23/06 18:45	464.17
SWPW-2	9/9/06 18:05	501.77	SWPW-1	10/23/06 18:50	464.16
SWPW-2	9/9/06 18:10	501.55	SWPW-1	10/23/06 18:55	464.17
SWPW-2	9/9/06 18:15	501.40	SWPW-1	10/23/06 19:00	464.16
SWPW-2	9/9/06 18:20	501.27	SWPW-1	10/23/06 19:05	464.17
SWPW-2	9/9/06 18:25	501.54	SWPW-1	10/23/06 19:10	464.17
SWPW-2	9/9/06 18:30	501.77	SWPW-1	10/23/06 19:15	464.17
SWPW-2	9/9/06 18:35	500.92	SWPW-1	10/23/06 19:20	464.17
SWPW-2	9/9/06 18:40	502.09	SWPW-1	10/23/06 19:25	464.16
SWPW-2	9/9/06 18:45	501.58	SWPW-1	10/23/06 19:30	464.17
SWPW-2	9/9/06 18:50	501.72	SWPW-1	10/23/06 19:35	464.17
SWPW-2	9/9/06 18:55	501.28	SWPW-1	10/23/06 19:40	464.17
SWPW-2	9/9/06 19:00	501.44	SWPW-1	10/23/06 19:45	464.16
SWPW-2	9/9/06 19:05	502.21	SWPW-1	10/23/06 19:50	464.16
SWPW-2	9/9/06 19:10	501.24	SWPW-1	10/23/06 19:55	464.17
SWPW-2	9/9/06 19:15	502.21	SWPW-1	10/23/06 20:00	464.17
SWPW-2	9/9/06 19:20	501.05	SWPW-1	10/23/06 20:05	464.16
SWPW-2	9/9/06 19:25	502.27	SWPW-1	10/23/06 20:10	464.17
SWPW-2	9/9/06 19:30	501.85	SWPW-1	10/23/06 20:15	464.17
SWPW-2	9/9/06 19:35	501.17	SWPW-1	10/23/06 20:20	464.17
SWPW-2	9/9/06 19:40	501.78	SWPW-1	10/23/06 20:25	464.17
SWPW-2	9/9/06 19:45	502.29	SWPW-1	10/23/06 20:30	464.17
SWPW-2	9/9/06 19:50	501.20	SWPW-1	10/23/06 20:35	464.18
SWPW-2	9/9/06 19:55	502.05	SWPW-1	10/23/06 20:40	464.17
SWPW-2	9/9/06 20:00	501.80	SWPW-1	10/23/06 20:45	464.17
SWPW-2	9/9/06 20:05	502.12	SWPW-1	10/23/06 20:50	464.16
SWPW-2	9/9/06 20:10	501.67	SWPW-1	10/23/06 20:55	464.19
SWPW-2	9/9/06 20:15	501.01	SWPW-1	10/23/06 21:00	464.18
SWPW-2	9/9/06 20:20	501.57	SWPW-1	10/23/06 21:05	464.16
SWPW-2	9/9/06 20:25	501.82	SWPW-1	10/23/06 21:10	464.18
SWPW-2	9/9/06 20:30	502.29	SWPW-1	10/23/06 21:15	464.17
SWPW-2	9/9/06 20:35	501.99	SWPW-1	10/23/06 21:20	464.16
SWPW-2	9/9/06 20:40	501.99	SWPW-1	10/23/06 21:25	464.18
SWPW-2	9/9/06 20:45	501.17	SWPW-1	10/23/06 21:30	464.17
SWPW-2	9/9/06 20:50	502.25	SWPW-1	10/23/06 21:35	464.17
SWPW-2	9/9/06 20:55	501.75	SWPW-1	10/23/06 21:40	464.17
SWPW-2	9/9/06 21:00	501.88	SWPW-1	10/23/06 21:45	464.18
SWPW-2	9/9/06 21:05	501.98	SWPW-1	10/23/06 21:50	464.18
SWPW-2	9/9/06 21:10	502.06	SWPW-1	10/23/06 21:55	464.18
SWPW-2	9/9/06 21:15	502.08	SWPW-1	10/23/06 22:00	464.17
SWPW-2	9/9/06 21:20	501.70	SWPW-1	10/23/06 22:05	464.17
SWPW-2	9/9/06 21:25	502.17	SWPW-1	10/23/06 22:10	464.19
SWPW-2	9/9/06 21:30	501.77	SWPW-1	10/23/06 22:15	464.18
SWPW-2	9/9/06 21:35	502.32	SWPW-1	10/23/06 22:20	464.19
SWPW-2	9/9/06 21:40	501.91	SWPW-1	10/23/06 22:25	464.18
SWPW-2	9/9/06 21:45	501.84	SWPW-1	10/23/06 22:30	464.18
SWPW-2	9/9/06 21:50	501.94	SWPW-1	10/23/06 22:35	464.19
SWPW-2	9/9/06 21:55	502.30	SWPW-1	10/23/06 22:40	464.22
SWPW-2	9/9/06 22:00	502.08	SWPW-1	10/23/06 22:45	464.19
SWPW-2	9/9/06 22:05	502.02	SWPW-1	10/23/06 22:50	464.19
SWPW-2	9/9/06 22:10	502.12	SWPW-1	10/23/06 22:55	464.18
SWPW-2	9/9/06 22:15	501.80	SWPW-1	10/23/06 23:00	464.21
SWPW-2	9/9/06 22:20	502.13	SWPW-1	10/23/06 23:05	464.19
SWPW-2	9/9/06 22:25	501.83	SWPW-1	10/23/06 23:10	464.19
SWPW-2	9/9/06 22:30	502.30	SWPW-1	10/23/06 23:15	464.19
SWPW-2	9/9/06 22:35	501.88	SWPW-1	10/23/06 23:20	464.17
SWPW-2	9/9/06 22:40	501.82	SWPW-1	10/23/06 23:25	464.18
SWPW-2	9/9/06 22:45	501.66	SWPW-1	10/23/06 23:30	464.19
SWPW-2	9/9/06 22:50	502.16	SWPW-1	10/23/06 23:35	464.19
SWPW-2	9/9/06 22:55	502.06	SWPW-1	10/23/06 23:40	464.20
SWPW-2	9/9/06 23:00	502.19	SWPW-1	10/23/06 23:45	464.18
SWPW-2	9/9/06 23:05	501.94	SWPW-1	10/23/06 23:50	464.19
SWPW-2	9/9/06 23:10	501.81	SWPW-1	10/23/06 23:55	464.19
SWPW-2	9/9/06 23:15	502.19	SWPW-1	10/24/06 0:00	464.19
SWPW-2	9/9/06 23:20	502.89	SWPW-1	10/24/06 0:05	464.23
SWPW-2	9/9/06 23:25	501.99	SWPW-1	10/24/06 0:10	464.23
SWPW-2	9/9/06 23:30	502.11	SWPW-1	10/24/06 0:15	464.19
SWPW-2	9/9/06 23:35	501.80	SWPW-1	10/24/06 0:20	464.20
SWPW-2	9/9/06 23:40	501.47	SWPW-1	10/24/06 0:25	464.19
SWPW-2	9/9/06 23:45	502.11	SWPW-1	10/24/06 0:30	464.23
SWPW-2	9/9/06 23:50	501.67	SWPW-1	10/24/06 0:35	464.20
SWPW-2	9/9/06 23:55	501.87	SWPW-1	10/24/06 0:40	464.19
SWPW-2	9/10/06 0:00	502.08	SWPW-1	10/24/06 0:45	464.20
SWPW-2	9/10/06 0:05	501.52	SWPW-1	10/24/06 0:50	464.19
SWPW-2	9/10/06 0:10	502.46	SWPW-1	10/24/06 0:55	464.20
SWPW-2	9/10/06 0:15	502.31	SWPW-1	10/24/06 1:00	464.20
SWPW-2	9/10/06 0:20	502.77	SWPW-1	10/24/06 1:05	464.19
SWPW-2	9/10/06 0:25	502.11	SWPW-1	10/24/06 1:10	464.20
SWPW-2	9/10/06 0:30	502.35	SWPW-1	10/24/06 1:15	464.21
SWPW-2	9/10/06 0:35	501.98	SWPW-1	10/24/06 1:20	464.19
SWPW-2	9/10/06 0:40	502.47	SWPW-1	10/24/06 1:25	464.19
SWPW-2	9/10/06 0:45	501.89	SWPW-1	10/24/06 1:30	464.19
SWPW-2	9/10/06 0:50	502.02	SWPW-1	10/24/06 1:35	464.19
SWPW-2	9/10/06 0:55	502.00	SWPW-1	10/24/06 1:40	464.21
SWPW-2	9/10/06 1:00	502.49	SWPW-1	10/24/06 1:45	464.19
SWPW-2	9/10/06 1:05	502.73	SWPW-1	10/24/06 1:50	464.23
SWPW-2	9/10/06 1:10	502.73	SWPW-1	10/24/06 1:55	464.19
SWPW-2	9/10/06 1:15	502.15	SWPW-1	10/24/06 2:00	464.19
SWPW-2	9/10/06 1:20	502.59	SWPW-1	10/24/06 2:05	464.19
SWPW-2	9/10/06 1:25	502.46	SWPW-1	10/24/06 2:10	464.19
SWPW-2	9/10/06 1:30	501.90	SWPW-1	10/24/06 2:15	464.21
SWPW-2	9/10/06 1:35	501.98	SWPW-1	10/24/06 2:20	464.18
SWPW-2	9/10/06 1:40	501.95	SWPW-1	10/24/06 2:25	464.19
SWPW-2	9/10/06 1:45	502.12	SWPW-1	10/24/06 2:30	464.18
SWPW-2	9/10/06 1:50	502.22	SWPW-1	10/24/06 2:35	464.18

Location	Date	DTH2O SWPW-2
SWPW-2	9/10/06 1:55	502.96
SWPW-2	9/10/06 2:00	501.98
SWPW-2	9/10/06 2:05	502.52
SWPW-2	9/10/06 2:10	502.30
SWPW-2	9/10/06 2:15	502.68
SWPW-2	9/10/06 2:20	502.04
SWPW-2	9/10/06 2:25	502.67
SWPW-2	9/10/06 2:30	502.26
SWPW-2	9/10/06 2:35	502.90
SWPW-2	9/10/06 2:40	502.49
SWPW-2	9/10/06 2:45	502.88
SWPW-2	9/10/06 2:50	503.20
SWPW-2	9/10/06 2:55	502.49
SWPW-2	9/10/06 3:00	502.72
SWPW-2	9/10/06 3:05	502.94
SWPW-2	9/10/06 3:10	502.50
SWPW-2	9/10/06 3:15	502.30
SWPW-2	9/10/06 3:20	502.33
SWPW-2	9/10/06 3:25	503.10
SWPW-2	9/10/06 3:30	502.93
SWPW-2	9/10/06 3:35	503.74
SWPW-2	9/10/06 3:40	502.86
SWPW-2	9/10/06 3:45	503.32
SWPW-2	9/10/06 3:50	503.14
SWPW-2	9/10/06 3:55	503.68
SWPW-2	9/10/06 4:00	503.21
SWPW-2	9/10/06 4:05	502.97
SWPW-2	9/10/06 4:10	503.28
SWPW-2	9/10/06 4:15	503.08
SWPW-2	9/10/06 4:20	503.77
SWPW-2	9/10/06 4:25	503.18
SWPW-2	9/10/06 4:30	503.27
SWPW-2	9/10/06 4:35	502.45
SWPW-2	9/10/06 4:40	503.84
SWPW-2	9/10/06 4:45	503.33
SWPW-2	9/10/06 4:50	503.12
SWPW-2	9/10/06 4:55	504.01
SWPW-2	9/10/06 5:00	503.32
SWPW-2	9/10/06 5:05	502.36
SWPW-2	9/10/06 5:10	502.37
SWPW-2	9/10/06 5:15	502.75
SWPW-2	9/10/06 5:20	502.74
SWPW-2	9/10/06 5:25	502.59
SWPW-2	9/10/06 5:30	502.52
SWPW-2	9/10/06 5:35	502.92
SWPW-2	9/10/06 5:40	502.67
SWPW-2	9/10/06 5:45	503.36
SWPW-2	9/10/06 5:50	503.04
SWPW-2	9/10/06 5:55	502.98
SWPW-2	9/10/06 6:00	502.84
SWPW-2	9/10/06 6:05	503.47
SWPW-2	9/10/06 6:10	503.15
SWPW-2	9/10/06 6:15	503.01
SWPW-2	9/10/06 6:20	503.06
SWPW-2	9/10/06 6:25	503.36
SWPW-2	9/10/06 6:30	502.80
SWPW-2	9/10/06 6:35	503.05
SWPW-2	9/10/06 6:40	502.80
SWPW-2	9/10/06 6:45	503.46
SWPW-2	9/10/06 6:50	502.83
SWPW-2	9/10/06 6:55	502.98
SWPW-2	9/10/06 7:00	503.25
SWPW-2	9/10/06 7:05	503.28
SWPW-2	9/10/06 7:10	502.91
SWPW-2	9/10/06 7:15	502.68
SWPW-2	9/10/06 7:20	503.70
SWPW-2	9/10/06 7:25	503.54
SWPW-2	9/10/06 7:30	503.60
SWPW-2	9/10/06 7:35	503.18
SWPW-2	9/10/06 7:40	503.47
SWPW-2	9/10/06 7:45	502.78
SWPW-2	9/10/06 7:50	503.17
SWPW-2	9/10/06 7:55	502.46
SWPW-2	9/10/06 8:00	503.68
SWPW-2	9/10/06 8:05	502.83
SWPW-2	9/10/06 8:10	503.14
SWPW-2	9/10/06 8:15	503.18
SWPW-2	9/10/06 8:20	503.29
SWPW-2	9/10/06 8:25	503.23
SWPW-2	9/10/06 8:30	503.60
SWPW-2	9/10/06 8:35	503.34
SWPW-2	9/10/06 8:40	504.08
SWPW-2	9/10/06 8:45	503.12
SWPW-2	9/10/06 8:50	503.24
SWPW-2	9/10/06 8:55	503.17
SWPW-2	9/10/06 9:00	502.40
SWPW-2	9/10/06 9:05	502.85
SWPW-2	9/10/06 9:10	503.92
SWPW-2	9/10/06 9:15	503.01
SWPW-2	9/10/06 9:20	502.65
SWPW-2	9/10/06 9:25	503.10
SWPW-2	9/10/06 9:30	503.55
SWPW-2	9/10/06 9:35	502.56
SWPW-2	9/10/06 9:40	503.46
SWPW-2	9/10/06 9:45	503.35
SWPW-2	9/10/06 9:50	503.43
SWPW-2	9/10/06 9:55	502.44
SWPW-2	9/10/06 10:00	503.57
SWPW-2	9/10/06 10:05	503.63
SWPW-2	9/10/06 10:10	503.31

Location	Date	DTH2O SWPW-1
SWPW-1	10/24/06 2:40	464.19
SWPW-1	10/24/06 2:45	464.18
SWPW-1	10/24/06 2:50	464.21
SWPW-1	10/24/06 2:55	464.18
SWPW-1	10/24/06 3:00	464.22
SWPW-1	10/24/06 3:05	464.17
SWPW-1	10/24/06 3:10	464.18
SWPW-1	10/24/06 3:15	464.21
SWPW-1	10/24/06 3:20	464.17
SWPW-1	10/24/06 3:25	464.17
SWPW-1	10/24/06 3:30	464.17
SWPW-1	10/24/06 3:35	464.17
SWPW-1	10/24/06 3:40	464.18
SWPW-1	10/24/06 3:45	464.17
SWPW-1	10/24/06 3:50	464.17
SWPW-1	10/24/06 3:55	464.17
SWPW-1	10/24/06 4:00	464.16
SWPW-1	10/24/06 4:05	464.16
SWPW-1	10/24/06 4:10	464.16
SWPW-1	10/24/06 4:15	464.16
SWPW-1	10/24/06 4:20	464.15
SWPW-1	10/24/06 4:25	464.15
SWPW-1	10/24/06 4:30	464.15
SWPW-1	10/24/06 4:35	464.14
SWPW-1	10/24/06 4:40	464.15
SWPW-1	10/24/06 4:45	464.14
SWPW-1	10/24/06 4:50	464.14
SWPW-1	10/24/06 4:55	464.14
SWPW-1	10/24/06 5:00	464.14
SWPW-1	10/24/06 5:05	464.14
SWPW-1	10/24/06 5:10	464.14
SWPW-1	10/24/06 5:15	464.13
SWPW-1	10/24/06 5:20	464.13
SWPW-1	10/24/06 5:25	464.14
SWPW-1	10/24/06 5:30	464.13
SWPW-1	10/24/06 5:35	464.12
SWPW-1	10/24/06 5:40	464.12
SWPW-1	10/24/06 5:45	464.13
SWPW-1	10/24/06 5:50	464.13
SWPW-1	10/24/06 5:55	464.12
SWPW-1	10/24/06 6:00	464.13
SWPW-1	10/24/06 6:05	464.12
SWPW-1	10/24/06 6:10	464.11
SWPW-1	10/24/06 6:15	464.12
SWPW-1	10/24/06 6:20	464.12
SWPW-1	10/24/06 6:25	464.15
SWPW-1	10/24/06 6:30	464.12
SWPW-1	10/24/06 6:35	464.12
SWPW-1	10/24/06 6:40	464.12
SWPW-1	10/24/06 6:45	464.12
SWPW-1	10/24/06 6:50	464.11
SWPW-1	10/24/06 6:55	464.09
SWPW-1	10/24/06 7:00	464.11
SWPW-1	10/24/06 7:05	464.11
SWPW-1	10/24/06 7:10	464.11
SWPW-1	10/24/06 7:15	464.10
SWPW-1	10/24/06 7:20	464.10
SWPW-1	10/24/06 7:25	464.11
SWPW-1	10/24/06 7:30	464.11
SWPW-1	10/24/06 7:35	464.10
SWPW-1	10/24/06 7:40	464.12
SWPW-1	10/24/06 7:45	464.14
SWPW-1	10/24/06 7:50	464.10
SWPW-1	10/24/06 7:55	464.10
SWPW-1	10/24/06 8:00	464.10
SWPW-1	10/24/06 8:05	464.10
SWPW-1	10/24/06 8:10	464.13
SWPW-1	10/24/06 8:15	464.10
SWPW-1	10/24/06 8:20	464.09
SWPW-1	10/24/06 8:25	464.09
SWPW-1	10/24/06 8:30	464.09
SWPW-1	10/24/06 8:35	464.12
SWPW-1	10/24/06 8:40	464.13
SWPW-1	10/24/06 8:45	464.09
SWPW-1	10/24/06 8:50	464.08
SWPW-1	10/24/06 8:55	464.09
SWPW-1	10/24/06 9:00	464.10
SWPW-1	10/24/06 9:05	464.09
SWPW-1	10/24/06 9:10	464.09
SWPW-1	10/24/06 9:15	464.10
SWPW-1	10/24/06 9:20	464.09
SWPW-1	10/24/06 9:25	464.08
SWPW-1	10/24/06 9:30	464.09
SWPW-1	10/24/06 9:35	464.08
SWPW-1	10/24/06 9:40	464.08
SWPW-1	10/24/06 9:45	464.08
SWPW-1	10/24/06 9:50	464.09
SWPW-1	10/24/06 9:55	464.09
SWPW-1	10/24/06 10:00	464.09

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/10/06 10:15	503.62			
SWPW-2	9/10/06 10:20	503.88			
SWPW-2	9/10/06 10:25	501.99			
SWPW-2	9/10/06 10:30	503.77			
SWPW-2	9/10/06 10:35	503.25			
SWPW-2	9/10/06 10:40	503.03			
SWPW-2	9/10/06 10:45	503.92			
SWPW-2	9/10/06 10:50	503.09			
SWPW-2	9/10/06 10:55	503.20			
SWPW-2	9/10/06 11:00	504.27			
SWPW-2	9/10/06 11:05	503.43			
SWPW-2	9/10/06 11:10	502.86			
SWPW-2	9/10/06 11:15	503.44			
SWPW-2	9/10/06 11:20	503.76			
SWPW-2	9/10/06 11:25	503.30			
SWPW-2	9/10/06 11:30	503.20			
SWPW-2	9/10/06 11:35	503.97			
SWPW-2	9/10/06 11:40	503.32			
SWPW-2	9/10/06 11:45	503.61			
SWPW-2	9/10/06 11:50	504.01			
SWPW-2	9/10/06 11:55	503.47			
SWPW-2	9/10/06 12:00	503.61			
SWPW-2	9/10/06 12:05	503.67			
SWPW-2	9/10/06 12:10	503.59			
SWPW-2	9/10/06 12:15	503.91			
SWPW-2	9/10/06 12:20	503.28			
SWPW-2	9/10/06 12:25	504.18			
SWPW-2	9/10/06 12:30	504.64			
SWPW-2	9/10/06 12:35	503.56			
SWPW-2	9/10/06 12:40	504.10			
SWPW-2	9/10/06 12:45	504.15			
SWPW-2	9/10/06 12:50	503.33			
SWPW-2	9/10/06 12:55	504.02			
SWPW-2	9/10/06 13:00	504.01			
SWPW-2	9/10/06 13:05	503.99			
SWPW-2	9/10/06 13:10	504.00			
SWPW-2	9/10/06 13:15	504.71			
SWPW-2	9/10/06 13:20	503.51			
SWPW-2	9/10/06 13:25	503.68			
SWPW-2	9/10/06 13:30	504.24			
SWPW-2	9/10/06 13:35	503.97			
SWPW-2	9/10/06 13:40	504.14			
SWPW-2	9/10/06 13:45	503.85			
SWPW-2	9/10/06 13:50	503.52			
SWPW-2	9/10/06 13:55	504.17			
SWPW-2	9/10/06 14:00	504.19			
SWPW-2	9/10/06 14:05	504.45			
SWPW-2	9/10/06 14:10	504.41			
SWPW-2	9/10/06 14:15	503.80			
SWPW-2	9/10/06 14:20	504.30			
SWPW-2	9/10/06 14:25	504.49			
SWPW-2	9/10/06 14:30	503.82			
SWPW-2	9/10/06 14:35	504.41			
SWPW-2	9/10/06 14:40	504.35			
SWPW-2	9/10/06 14:45	504.02			
SWPW-2	9/10/06 14:50	504.50			
SWPW-2	9/10/06 14:55	504.24			
SWPW-2	9/10/06 15:00	504.20			
SWPW-2	9/10/06 15:05	504.33			
SWPW-2	9/10/06 15:10	503.86			
SWPW-2	9/10/06 15:15	504.15			
SWPW-2	9/10/06 15:20	504.47			
SWPW-2	9/10/06 15:25	505.28			
SWPW-2	9/10/06 15:30	504.36			
SWPW-2	9/10/06 15:35	504.04			
SWPW-2	9/10/06 15:40	504.73			
SWPW-2	9/10/06 15:45	504.29			
SWPW-2	9/10/06 15:50	504.52			
SWPW-2	9/10/06 15:55	504.48			
SWPW-2	9/10/06 16:00	504.52			
SWPW-2	9/10/06 16:05	503.59			
SWPW-2	9/10/06 16:10	503.85			
SWPW-2	9/10/06 16:15	503.84			
SWPW-2	9/10/06 16:20	504.06			
SWPW-2	9/10/06 16:25	504.06			
SWPW-2	9/10/06 16:30	504.06			
SWPW-2	9/10/06 16:35	504.60			
SWPW-2	9/10/06 16:40	504.76			
SWPW-2	9/10/06 16:45	504.51			
SWPW-2	9/10/06 16:50	504.09			
SWPW-2	9/10/06 16:55	504.25			
SWPW-2	9/10/06 17:00	504.68			
SWPW-2	9/10/06 17:05	504.31			
SWPW-2	9/10/06 17:10	504.96			
SWPW-2	9/10/06 17:15	504.32			
SWPW-2	9/10/06 17:20	504.02			
SWPW-2	9/10/06 17:25	504.54			
SWPW-2	9/10/06 17:30	503.66			
SWPW-2	9/10/06 17:35	503.98			
SWPW-2	9/10/06 17:40	504.20			
SWPW-2	9/10/06 17:45	505.50			
SWPW-2	9/10/06 17:50	504.52			
SWPW-2	9/10/06 17:55	504.11			
SWPW-2	9/10/06 18:00	504.34			
SWPW-2	9/10/06 18:05	504.49			
SWPW-2	9/10/06 18:10	503.79			
SWPW-2	9/10/06 18:15	505.01			
SWPW-2	9/10/06 18:20	504.38			
SWPW-2	9/10/06 18:25	505.02			
SWPW-2	9/10/06 18:30	504.22			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/10/06 18:35	504.45			
SWPW-2	9/10/06 18:40	504.16			
SWPW-2	9/10/06 18:45	504.44			
SWPW-2	9/10/06 18:50	504.75			
SWPW-2	9/10/06 18:55	504.70			
SWPW-2	9/10/06 19:00	504.99			
SWPW-2	9/10/06 19:05	504.79			
SWPW-2	9/10/06 19:10	505.24			
SWPW-2	9/10/06 19:15	504.53			
SWPW-2	9/10/06 19:20	504.25			
SWPW-2	9/10/06 19:25	504.46			
SWPW-2	9/10/06 19:30	504.80			
SWPW-2	9/10/06 19:35	504.51			
SWPW-2	9/10/06 19:40	504.62			
SWPW-2	9/10/06 19:45	504.62			
SWPW-2	9/10/06 19:50	504.20			
SWPW-2	9/10/06 19:55	504.53			
SWPW-2	9/10/06 20:00	504.81			
SWPW-2	9/10/06 20:05	504.47			
SWPW-2	9/10/06 20:10	504.04			
SWPW-2	9/10/06 20:15	504.54			
SWPW-2	9/10/06 20:20	504.64			
SWPW-2	9/10/06 20:25	504.70			
SWPW-2	9/10/06 20:30	504.22			
SWPW-2	9/10/06 20:35	504.59			
SWPW-2	9/10/06 20:40	504.47			
SWPW-2	9/10/06 20:45	504.73			
SWPW-2	9/10/06 20:50	504.26			
SWPW-2	9/10/06 20:55	504.07			
SWPW-2	9/10/06 21:00	504.52			
SWPW-2	9/10/06 21:05	504.08			
SWPW-2	9/10/06 21:10	504.85			
SWPW-2	9/10/06 21:15	504.63			
SWPW-2	9/10/06 21:20	504.50			
SWPW-2	9/10/06 21:25	504.57			
SWPW-2	9/10/06 21:30	504.98			
SWPW-2	9/10/06 21:35	504.75			
SWPW-2	9/10/06 21:40	504.34			
SWPW-2	9/10/06 21:45	504.00			
SWPW-2	9/10/06 21:50	504.51			
SWPW-2	9/10/06 21:55	504.69			
SWPW-2	9/10/06 22:00	504.30			
SWPW-2	9/10/06 22:05	503.93			
SWPW-2	9/10/06 22:10	504.51			
SWPW-2	9/10/06 22:15	504.53			
SWPW-2	9/10/06 22:20	504.82			
SWPW-2	9/10/06 22:25	505.31			
SWPW-2	9/10/06 22:30	504.57			
SWPW-2	9/10/06 22:35	505.01			
SWPW-2	9/10/06 22:40	504.70			
SWPW-2	9/10/06 22:45	504.20			
SWPW-2	9/10/06 22:50	504.25			
SWPW-2	9/10/06 22:55	504.51			
SWPW-2	9/10/06 23:00	504.72			
SWPW-2	9/10/06 23:05	504.25			
SWPW-2	9/10/06 23:10	504.27			
SWPW-2	9/10/06 23:15	504.64			
SWPW-2	9/10/06 23:20	504.75			
SWPW-2	9/10/06 23:25	504.75			
SWPW-2	9/10/06 23:30	504.50			
SWPW-2	9/10/06 23:35	503.85			
SWPW-2	9/10/06 23:40	504.16			
SWPW-2	9/10/06 23:45	505.08			
SWPW-2	9/10/06 23:50	504.53			
SWPW-2	9/10/06 23:55	504.66			
SWPW-2	9/11/06 0:00	504.43			
SWPW-2	9/11/06 0:05	504.17			
SWPW-2	9/11/06 0:10	505.19			
SWPW-2	9/11/06 0:15	504.62			
SWPW-2	9/11/06 0:20	504.38			
SWPW-2	9/11/06 0:25	504.37			
SWPW-2	9/11/06 0:30	505.22			
SWPW-2	9/11/06 0:35	505.12			
SWPW-2	9/11/06 0:40	505.49			
SWPW-2	9/11/06 0:45	504.61			
SWPW-2	9/11/06 0:50	504.54			
SWPW-2	9/11/06 0:55	503.64			
SWPW-2	9/11/06 1:00	504.89			
SWPW-2	9/11/06 1:05	504.55			
SWPW-2	9/11/06 1:10	504.89			
SWPW-2	9/11/06 1:15	505.12			
SWPW-2	9/11/06 1:20	504.60			
SWPW-2	9/11/06 1:25	504.98			
SWPW-2	9/11/06 1:30	505.00			
SWPW-2	9/11/06 1:35	505.26			
SWPW-2	9/11/06 1:40	505.02			
SWPW-2	9/11/06 1:45	505.15			
SWPW-2	9/11/06 1:50	504.83			
SWPW-2	9/11/06 1:55	504.99			
SWPW-2	9/11/06 2:00	504.48			
SWPW-2	9/11/06 2:05	505.03			
SWPW-2	9/11/06 2:10	504.87			
SWPW-2	9/11/06 2:15	505.06			
SWPW-2	9/11/06 2:20	504.90			
SWPW-2	9/11/06 2:25	504.52			
SWPW-2	9/11/06 2:30	505.17			
SWPW-2	9/11/06 2:35	504.79			
SWPW-2	9/11/06 2:40	504.74			
SWPW-2	9/11/06 2:45	505.07			
SWPW-2	9/11/06 2:50	504.44			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/11/06 2:55	505.00			
SWPW-2	9/11/06 3:00	504.98			
SWPW-2	9/11/06 3:05	504.89			
SWPW-2	9/11/06 3:10	504.35			
SWPW-2	9/11/06 3:15	504.56			
SWPW-2	9/11/06 3:20	504.64			
SWPW-2	9/11/06 3:25	504.47			
SWPW-2	9/11/06 3:30	504.48			
SWPW-2	9/11/06 3:35	505.17			
SWPW-2	9/11/06 3:40	504.75			
SWPW-2	9/11/06 3:45	504.60			
SWPW-2	9/11/06 3:50	504.82			
SWPW-2	9/11/06 3:55	503.78			
SWPW-2	9/11/06 4:00	504.82			
SWPW-2	9/11/06 4:05	504.02			
SWPW-2	9/11/06 4:10	504.93			
SWPW-2	9/11/06 4:15	505.49			
SWPW-2	9/11/06 4:20	505.01			
SWPW-2	9/11/06 4:25	504.57			
SWPW-2	9/11/06 4:30	505.49			
SWPW-2	9/11/06 4:35	504.78			
SWPW-2	9/11/06 4:40	505.39			
SWPW-2	9/11/06 4:45	505.37			
SWPW-2	9/11/06 4:50	505.38			
SWPW-2	9/11/06 4:55	505.18			
SWPW-2	9/11/06 5:00	504.91			
SWPW-2	9/11/06 5:05	505.12			
SWPW-2	9/11/06 5:10	505.16			
SWPW-2	9/11/06 5:15	504.83			
SWPW-2	9/11/06 5:20	505.64			
SWPW-2	9/11/06 5:25	505.19			
SWPW-2	9/11/06 5:30	505.32			
SWPW-2	9/11/06 5:35	505.26			
SWPW-2	9/11/06 5:40	504.82			
SWPW-2	9/11/06 5:45	505.30			
SWPW-2	9/11/06 5:50	504.73			
SWPW-2	9/11/06 5:55	505.50			
SWPW-2	9/11/06 6:00	505.80			
SWPW-2	9/11/06 6:05	505.01			
SWPW-2	9/11/06 6:10	505.90			
SWPW-2	9/11/06 6:15	505.67			
SWPW-2	9/11/06 6:20	505.52			
SWPW-2	9/11/06 6:25	504.75			
SWPW-2	9/11/06 6:30	505.25			
SWPW-2	9/11/06 6:35	505.12			
SWPW-2	9/11/06 6:40	504.72			
SWPW-2	9/11/06 6:45	505.44			
SWPW-2	9/11/06 6:50	505.17			
SWPW-2	9/11/06 6:55	505.29			
SWPW-2	9/11/06 7:00	505.16			
SWPW-2	9/11/06 7:05	505.21			
SWPW-2	9/11/06 7:10	505.31			
SWPW-2	9/11/06 7:15	504.97			
SWPW-2	9/11/06 7:20	505.55			
SWPW-2	9/11/06 7:25	504.88			
SWPW-2	9/11/06 7:30	504.89			
SWPW-2	9/11/06 7:35	505.05			
SWPW-2	9/11/06 7:40	506.04			
SWPW-2	9/11/06 7:45	505.14			
SWPW-2	9/11/06 7:50	505.58			
SWPW-2	9/11/06 7:55	505.13			
SWPW-2	9/11/06 8:00	505.45			
SWPW-2	9/11/06 8:05	505.65			
SWPW-2	9/11/06 8:10	505.21			
SWPW-2	9/11/06 8:15	505.73			
SWPW-2	9/11/06 8:20	505.58			
SWPW-2	9/11/06 8:25	505.14			
SWPW-2	9/11/06 8:30	504.90			
SWPW-2	9/11/06 8:35	505.75			
SWPW-2	9/11/06 8:40	504.87			
SWPW-2	9/11/06 8:45	505.29			
SWPW-2	9/11/06 8:50	505.27			
SWPW-2	9/11/06 8:55	505.42			
SWPW-2	9/11/06 9:00	505.53			
SWPW-2	9/11/06 9:05	505.51			
SWPW-2	9/11/06 9:10	506.05			
SWPW-2	9/11/06 9:15	505.60			
SWPW-2	9/11/06 9:20	505.42			
SWPW-2	9/11/06 9:25	505.09			
SWPW-2	9/11/06 9:30	504.64			
SWPW-2	9/11/06 9:35	505.30			
SWPW-2	9/11/06 9:40	505.52			
SWPW-2	9/11/06 9:45	505.20			
SWPW-2	9/11/06 9:50	505.64			
SWPW-2	9/11/06 9:55	505.50			
SWPW-2	9/11/06 10:00	505.18			
SWPW-2	9/11/06 10:05	505.82			
SWPW-2	9/11/06 10:10	505.17			
SWPW-2	9/11/06 10:15	505.67			
SWPW-2	9/11/06 10:20	505.28			
SWPW-2	9/11/06 10:25	505.28			
SWPW-2	9/11/06 10:30	504.66			
SWPW-2	9/11/06 10:35	506.02			
SWPW-2	9/11/06 10:40	506.51			
SWPW-2	9/11/06 10:45	505.82			
SWPW-2	9/11/06 10:50	505.65			
SWPW-2	9/11/06 10:55	505.52			
SWPW-2	9/11/06 11:00	506.04			
SWPW-2	9/11/06 11:05	505.60			
SWPW-2	9/11/06 11:10	506.11			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/11/06 11:15	505.21			
SWPW-2	9/11/06 11:20	505.35			
SWPW-2	9/11/06 11:25	505.70			
SWPW-2	9/11/06 11:30	505.60			
SWPW-2	9/11/06 11:35	505.30			
SWPW-2	9/11/06 11:40	505.66			
SWPW-2	9/11/06 11:45	505.76			
SWPW-2	9/11/06 11:50	505.65			
SWPW-2	9/11/06 11:55	505.93			
SWPW-2	9/11/06 12:00	505.20			
SWPW-2	9/11/06 12:05	505.31			
SWPW-2	9/11/06 12:10	505.62			
SWPW-2	9/11/06 12:15	505.77			
SWPW-2	9/11/06 12:20	506.18			
SWPW-2	9/11/06 12:25	506.01			
SWPW-2	9/11/06 12:30	505.98			
SWPW-2	9/11/06 12:35	506.28			
SWPW-2	9/11/06 12:40	505.93			
SWPW-2	9/11/06 12:45	505.48			
SWPW-2	9/11/06 12:50	505.76			
SWPW-2	9/11/06 12:55	505.92			
SWPW-2	9/11/06 13:00	505.66			
SWPW-2	9/11/06 13:05	505.45			
SWPW-2	9/11/06 13:10	505.66			
SWPW-2	9/11/06 13:15	505.19			
SWPW-2	9/11/06 13:20	505.75			
SWPW-2	9/11/06 13:25	505.63			
SWPW-2	9/11/06 13:30	505.42			
SWPW-2	9/11/06 13:35	505.90			
SWPW-2	9/11/06 13:40	505.98			
SWPW-2	9/11/06 13:45	505.33			
SWPW-2	9/11/06 13:50	505.79			
SWPW-2	9/11/06 13:55	505.84			
SWPW-2	9/11/06 14:00	505.56			
SWPW-2	9/11/06 14:05	505.65			
SWPW-2	9/11/06 14:10	505.61			
SWPW-2	9/11/06 14:15	505.92			
SWPW-2	9/11/06 14:20	505.57			
SWPW-2	9/11/06 14:25	505.73			
SWPW-2	9/11/06 14:30	505.32			
SWPW-2	9/11/06 14:35	505.72			
SWPW-2	9/11/06 14:40	505.75			
SWPW-2	9/11/06 14:45	505.70			
SWPW-2	9/11/06 14:50	505.98			
SWPW-2	9/11/06 14:55	506.60			
SWPW-2	9/11/06 15:00	506.46			
SWPW-2	9/11/06 15:05	506.33			
SWPW-2	9/11/06 15:10	506.29			
SWPW-2	9/11/06 15:15	506.59			
SWPW-2	9/11/06 15:20	506.13			
SWPW-2	9/11/06 15:25	506.22			
SWPW-2	9/11/06 15:30	504.44			
SWPW-2	9/11/06 15:35	505.33			
SWPW-2	9/11/06 15:40	505.74			
SWPW-2	9/11/06 15:45	506.40			
SWPW-2	9/11/06 15:50	505.95			
SWPW-2	9/11/06 15:55	506.05			
SWPW-2	9/11/06 16:00	506.37			
SWPW-2	9/11/06 16:05	506.65			
SWPW-2	9/11/06 16:10	506.32			
SWPW-2	9/11/06 16:15	506.45			
SWPW-2	9/11/06 16:20	506.10			
SWPW-2	9/11/06 16:25	506.04			
SWPW-2	9/11/06 16:30	506.63			
SWPW-2	9/11/06 16:35	506.43			
SWPW-2	9/11/06 16:40	506.91			
SWPW-2	9/11/06 16:45	506.43			
SWPW-2	9/11/06 16:50	506.29			
SWPW-2	9/11/06 16:55	506.64			
SWPW-2	9/11/06 17:00	506.39			
SWPW-2	9/11/06 17:05	506.33			
SWPW-2	9/11/06 17:10	506.12			
SWPW-2	9/11/06 17:15	506.05			
SWPW-2	9/11/06 17:20	505.99			
SWPW-2	9/11/06 17:25	506.12			
SWPW-2	9/11/06 17:30	506.43			
SWPW-2	9/11/06 17:35	506.32			
SWPW-2	9/11/06 17:40	506.06			
SWPW-2	9/11/06 17:45	506.08			
SWPW-2	9/11/06 17:50	505.91			
SWPW-2	9/11/06 17:55	505.85			
SWPW-2	9/11/06 18:00	505.85			
SWPW-2	9/11/06 18:05	506.05			
SWPW-2	9/11/06 18:10	506.94			
SWPW-2	9/11/06 18:15	506.75			
SWPW-2	9/11/06 18:20	506.31			
SWPW-2	9/11/06 18:25	506.68			
SWPW-2	9/11/06 18:30	506.63			
SWPW-2	9/11/06 18:35	506.51			
SWPW-2	9/11/06 18:40	506.38			
SWPW-2	9/11/06 18:45	506.33			
SWPW-2	9/11/06 18:50	506.17			
SWPW-2	9/11/06 18:55	506.22			
SWPW-2	9/11/06 19:00	505.70			
SWPW-2	9/11/06 19:05	506.04			
SWPW-2	9/11/06 19:10	506.99			
SWPW-2	9/11/06 19:15	506.08			
SWPW-2	9/11/06 19:20	506.17			
SWPW-2	9/11/06 19:25	506.46			
SWPW-2	9/11/06 19:30	505.71			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/11/06 19:35	506.17			
SWPW-2	9/11/06 19:40	505.72			
SWPW-2	9/11/06 19:45	506.40			
SWPW-2	9/11/06 19:50	506.50			
SWPW-2	9/11/06 19:55	506.72			
SWPW-2	9/11/06 20:00	505.93			
SWPW-2	9/11/06 20:05	506.97			
SWPW-2	9/11/06 20:10	506.49			
SWPW-2	9/11/06 20:15	506.51			
SWPW-2	9/11/06 20:20	506.72			
SWPW-2	9/11/06 20:25	506.24			
SWPW-2	9/11/06 20:30	506.42			
SWPW-2	9/11/06 20:35	506.32			
SWPW-2	9/11/06 20:40	506.46			
SWPW-2	9/11/06 20:45	506.59			
SWPW-2	9/11/06 20:50	506.24			
SWPW-2	9/11/06 20:55	506.56			
SWPW-2	9/11/06 21:00	506.58			
SWPW-2	9/11/06 21:05	505.62			
SWPW-2	9/11/06 21:10	506.94			
SWPW-2	9/11/06 21:15	506.29			
SWPW-2	9/11/06 21:20	506.68			
SWPW-2	9/11/06 21:25	506.72			
SWPW-2	9/11/06 21:30	506.24			
SWPW-2	9/11/06 21:35	505.95			
SWPW-2	9/11/06 21:40	506.30			
SWPW-2	9/11/06 21:45	506.57			
SWPW-2	9/11/06 21:50	506.04			
SWPW-2	9/11/06 21:55	506.41			
SWPW-2	9/11/06 22:00	506.69			
SWPW-2	9/11/06 22:05	506.41			
SWPW-2	9/11/06 22:10	506.50			
SWPW-2	9/11/06 22:15	506.60			
SWPW-2	9/11/06 22:20	506.27			
SWPW-2	9/11/06 22:25	506.41			
SWPW-2	9/11/06 22:30	506.21			
SWPW-2	9/11/06 22:35	506.87			
SWPW-2	9/11/06 22:40	506.79			
SWPW-2	9/11/06 22:45	506.79			
SWPW-2	9/11/06 22:50	506.95			
SWPW-2	9/11/06 22:55	507.28			
SWPW-2	9/11/06 23:00	507.11			
SWPW-2	9/11/06 23:05	505.80			
SWPW-2	9/11/06 23:10	506.08			
SWPW-2	9/11/06 23:15	506.45			
SWPW-2	9/11/06 23:20	506.92			
SWPW-2	9/11/06 23:25	506.25			
SWPW-2	9/11/06 23:30	506.69			
SWPW-2	9/11/06 23:35	505.87			
SWPW-2	9/11/06 23:40	506.93			
SWPW-2	9/11/06 23:45	506.72			
SWPW-2	9/11/06 23:50	506.29			
SWPW-2	9/11/06 23:55	506.68			
SWPW-2	9/12/06 0:00	506.88			
SWPW-2	9/12/06 0:05	506.92			
SWPW-2	9/12/06 0:10	506.84			
SWPW-2	9/12/06 0:15	506.59			
SWPW-2	9/12/06 0:20	507.14			
SWPW-2	9/12/06 0:25	506.54			
SWPW-2	9/12/06 0:30	506.70			
SWPW-2	9/12/06 0:35	506.89			
SWPW-2	9/12/06 0:40	506.71			
SWPW-2	9/12/06 0:45	506.77			
SWPW-2	9/12/06 0:50	506.65			
SWPW-2	9/12/06 0:55	506.89			
SWPW-2	9/12/06 1:00	506.98			
SWPW-2	9/12/06 1:05	506.84			
SWPW-2	9/12/06 1:10	506.30			
SWPW-2	9/12/06 1:15	507.08			
SWPW-2	9/12/06 1:20	506.59			
SWPW-2	9/12/06 1:25	507.66			
SWPW-2	9/12/06 1:30	506.66			
SWPW-2	9/12/06 1:35	506.53			
SWPW-2	9/12/06 1:40	506.90			
SWPW-2	9/12/06 1:45	506.66			
SWPW-2	9/12/06 1:50	506.73			
SWPW-2	9/12/06 1:55	507.23			
SWPW-2	9/12/06 2:00	507.04			
SWPW-2	9/12/06 2:05	506.75			
SWPW-2	9/12/06 2:10	506.84			
SWPW-2	9/12/06 2:15	506.27			
SWPW-2	9/12/06 2:20	506.98			
SWPW-2	9/12/06 2:25	506.75			
SWPW-2	9/12/06 2:30	507.25			
SWPW-2	9/12/06 2:35	507.00			
SWPW-2	9/12/06 2:40	507.12			
SWPW-2	9/12/06 2:45	506.88			
SWPW-2	9/12/06 2:50	506.85			
SWPW-2	9/12/06 2:55	506.45			
SWPW-2	9/12/06 3:00	507.06			
SWPW-2	9/12/06 3:05	507.01			
SWPW-2	9/12/06 3:10	506.51			
SWPW-2	9/12/06 3:15	505.71			
SWPW-2	9/12/06 3:20	507.06			
SWPW-2	9/12/06 3:25	506.93			
SWPW-2	9/12/06 3:30	506.69			
SWPW-2	9/12/06 3:35	507.24			
SWPW-2	9/12/06 3:40	506.67			
SWPW-2	9/12/06 3:45	506.80			
SWPW-2	9/12/06 3:50	506.66			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/12/06 3:55	508.98			
SWPW-2	9/12/06 4:00	507.03			
SWPW-2	9/12/06 4:05	507.02			
SWPW-2	9/12/06 4:10	506.91			
SWPW-2	9/12/06 4:15	506.97			
SWPW-2	9/12/06 4:20	507.20			
SWPW-2	9/12/06 4:25	508.24			
SWPW-2	9/12/06 4:30	506.85			
SWPW-2	9/12/06 4:35	506.83			
SWPW-2	9/12/06 4:40	506.88			
SWPW-2	9/12/06 4:45	506.43			
SWPW-2	9/12/06 4:50	506.69			
SWPW-2	9/12/06 4:55	506.87			
SWPW-2	9/12/06 5:00	506.47			
SWPW-2	9/12/06 5:05	506.36			
SWPW-2	9/12/06 5:10	506.92			
SWPW-2	9/12/06 5:15	506.85			
SWPW-2	9/12/06 5:20	507.16			
SWPW-2	9/12/06 5:25	506.25			
SWPW-2	9/12/06 5:30	507.36			
SWPW-2	9/12/06 5:35	507.14			
SWPW-2	9/12/06 5:40	507.02			
SWPW-2	9/12/06 5:45	506.71			
SWPW-2	9/12/06 5:50	508.93			
SWPW-2	9/12/06 5:55	506.77			
SWPW-2	9/12/06 6:00	507.06			
SWPW-2	9/12/06 6:05	507.16			
SWPW-2	9/12/06 6:10	507.51			
SWPW-2	9/12/06 6:15	507.39			
SWPW-2	9/12/06 6:20	507.09			
SWPW-2	9/12/06 6:25	507.20			
SWPW-2	9/12/06 6:30	508.98			
SWPW-2	9/12/06 6:35	508.86			
SWPW-2	9/12/06 6:40	506.39			
SWPW-2	9/12/06 6:45	506.49			
SWPW-2	9/12/06 6:50	506.78			
SWPW-2	9/12/06 6:55	507.72			
SWPW-2	9/12/06 7:00	507.13			
SWPW-2	9/12/06 7:05	506.73			
SWPW-2	9/12/06 7:10	507.24			
SWPW-2	9/12/06 7:15	507.03			
SWPW-2	9/12/06 7:20	507.06			
SWPW-2	9/12/06 7:25	506.86			
SWPW-2	9/12/06 7:30	506.86			
SWPW-2	9/12/06 7:35	507.59			
SWPW-2	9/12/06 7:40	508.91			
SWPW-2	9/12/06 7:45	507.26			
SWPW-2	9/12/06 7:50	507.02			
SWPW-2	9/12/06 7:55	507.13			
SWPW-2	9/12/06 8:00	507.31			
SWPW-2	9/12/06 8:05	508.63			
SWPW-2	9/12/06 8:10	508.85			
SWPW-2	9/12/06 8:15	507.15			
SWPW-2	9/12/06 8:20	507.37			
SWPW-2	9/12/06 8:25	507.10			
SWPW-2	9/12/06 8:30	506.93			
SWPW-2	9/12/06 8:35	507.36			
SWPW-2	9/12/06 8:40	506.89			
SWPW-2	9/12/06 8:45	507.61			
SWPW-2	9/12/06 8:50	507.54			
SWPW-2	9/12/06 8:55	507.28			
SWPW-2	9/12/06 9:00	507.04			
SWPW-2	9/12/06 9:05	507.81			
SWPW-2	9/12/06 9:10	507.02			
SWPW-2	9/12/06 9:15	507.33			
SWPW-2	9/12/06 9:20	507.43			
SWPW-2	9/12/06 9:25	507.84			
SWPW-2	9/12/06 9:30	507.85			
SWPW-2	9/12/06 9:35	507.73			
SWPW-2	9/12/06 9:40	507.61			
SWPW-2	9/12/06 9:45	507.62			
SWPW-2	9/12/06 9:50	507.08			
SWPW-2	9/12/06 9:55	507.98			
SWPW-2	9/12/06 10:00	507.58			
SWPW-2	9/12/06 10:05	507.73			
SWPW-2	9/12/06 10:10	507.49			
SWPW-2	9/12/06 10:15	508.98			
SWPW-2	9/12/06 10:20	507.45			
SWPW-2	9/12/06 10:25	507.78			
SWPW-2	9/12/06 10:30	507.20			
SWPW-2	9/12/06 10:35	507.52			
SWPW-2	9/12/06 10:40	507.58			
SWPW-2	9/12/06 10:45	507.58			
SWPW-2	9/12/06 10:50	507.60			
SWPW-2	9/12/06 10:55	507.02			
SWPW-2	9/12/06 11:00	507.94			
SWPW-2	9/12/06 11:05	508.00			
SWPW-2	9/12/06 11:10	507.46			
SWPW-2	9/12/06 11:15	507.74			
SWPW-2	9/12/06 11:20	507.25			
SWPW-2	9/12/06 11:25	507.16			
SWPW-2	9/12/06 11:30	507.92			
SWPW-2	9/12/06 11:35	507.75			
SWPW-2	9/12/06 11:40	508.08			
SWPW-2	9/12/06 11:45	507.27			
SWPW-2	9/12/06 11:50	508.08			
SWPW-2	9/12/06 11:55	508.44			
SWPW-2	9/12/06 12:00	507.22			
SWPW-2	9/12/06 12:05	508.00			
SWPW-2	9/12/06 12:10	507.41			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/12/06 12:15	507.92			
SWPW-2	9/12/06 12:20	507.18			
SWPW-2	9/12/06 12:25	507.73			
SWPW-2	9/12/06 12:30	507.37			
SWPW-2	9/12/06 12:35	507.96			
SWPW-2	9/12/06 12:40	507.70			
SWPW-2	9/12/06 12:45	508.07			
SWPW-2	9/12/06 12:50	507.85			
SWPW-2	9/12/06 12:55	507.93			
SWPW-2	9/12/06 13:00	508.19			
SWPW-2	9/12/06 13:05	507.75			
SWPW-2	9/12/06 13:10	508.53			
SWPW-2	9/12/06 13:15	507.94			
SWPW-2	9/12/06 13:20	507.48			
SWPW-2	9/12/06 13:25	507.46			
SWPW-2	9/12/06 13:30	508.21			
SWPW-2	9/12/06 13:35	508.20			
SWPW-2	9/12/06 13:40	508.41			
SWPW-2	9/12/06 13:45	508.02			
SWPW-2	9/12/06 13:50	508.90			
SWPW-2	9/12/06 13:55	507.93			
SWPW-2	9/12/06 14:00	507.81			
SWPW-2	9/12/06 14:05	507.95			
SWPW-2	9/12/06 14:10	507.46			
SWPW-2	9/12/06 14:15	507.88			
SWPW-2	9/12/06 14:20	507.96			
SWPW-2	9/12/06 14:25	507.74			
SWPW-2	9/12/06 14:30	508.16			
SWPW-2	9/12/06 14:35	507.30			
SWPW-2	9/12/06 14:40	508.00			
SWPW-2	9/12/06 14:45	509.07			
SWPW-2	9/12/06 14:50	507.82			
SWPW-2	9/12/06 14:55	507.25			
SWPW-2	9/12/06 15:00	508.21			
SWPW-2	9/12/06 15:05	508.76			
SWPW-2	9/12/06 15:10	507.97			
SWPW-2	9/12/06 15:15	508.48			
SWPW-2	9/12/06 15:20	507.89			
SWPW-2	9/12/06 15:25	507.87			
SWPW-2	9/12/06 15:30	507.58			
SWPW-2	9/12/06 15:35	508.35			
SWPW-2	9/12/06 15:40	507.60			
SWPW-2	9/12/06 15:45	508.03			
SWPW-2	9/12/06 15:50	508.05			
SWPW-2	9/12/06 15:55	507.89			
SWPW-2	9/12/06 16:00	507.89			
SWPW-2	9/12/06 16:05	508.23			
SWPW-2	9/12/06 16:10	508.15			
SWPW-2	9/12/06 16:15	508.28			
SWPW-2	9/12/06 16:20	507.93			
SWPW-2	9/12/06 16:25	508.09			
SWPW-2	9/12/06 16:30	507.91			
SWPW-2	9/12/06 16:35	507.46			
SWPW-2	9/12/06 16:40	507.92			
SWPW-2	9/12/06 16:45	508.51			
SWPW-2	9/12/06 16:50	507.78			
SWPW-2	9/12/06 16:55	508.73			
SWPW-2	9/12/06 17:00	507.88			
SWPW-2	9/12/06 17:05	507.90			
SWPW-2	9/12/06 17:10	508.01			
SWPW-2	9/12/06 17:15	507.80			
SWPW-2	9/12/06 17:20	508.89			
SWPW-2	9/12/06 17:25	507.88			
SWPW-2	9/12/06 17:30	508.16			
SWPW-2	9/12/06 17:35	507.74			
SWPW-2	9/12/06 17:40	507.90			
SWPW-2	9/12/06 17:45	508.21			
SWPW-2	9/12/06 17:50	508.24			
SWPW-2	9/12/06 17:55	508.08			
SWPW-2	9/12/06 18:00	508.33			
SWPW-2	9/12/06 18:05	508.00			
SWPW-2	9/12/06 18:10	508.97			
SWPW-2	9/12/06 18:15	508.07			
SWPW-2	9/12/06 18:20	507.91			
SWPW-2	9/12/06 18:25	508.30			
SWPW-2	9/12/06 18:30	508.39			
SWPW-2	9/12/06 18:35	507.97			
SWPW-2	9/12/06 18:40	508.05			
SWPW-2	9/12/06 18:45	507.90			
SWPW-2	9/12/06 18:50	508.31			
SWPW-2	9/12/06 18:55	508.33			
SWPW-2	9/12/06 19:00	507.80			
SWPW-2	9/12/06 19:05	508.15			
SWPW-2	9/12/06 19:10	508.29			
SWPW-2	9/12/06 19:15	508.42			
SWPW-2	9/12/06 19:20	507.81			
SWPW-2	9/12/06 19:25	508.23			
SWPW-2	9/12/06 19:30	507.35			
SWPW-2	9/12/06 19:35	507.35			
SWPW-2	9/12/06 19:40	508.39			
SWPW-2	9/12/06 19:45	507.68			
SWPW-2	9/12/06 19:50	507.74			
SWPW-2	9/12/06 19:55	507.86			
SWPW-2	9/12/06 20:00	508.27			
SWPW-2	9/12/06 20:05	508.10			
SWPW-2	9/12/06 20:10	507.87			
SWPW-2	9/12/06 20:15	508.07			
SWPW-2	9/12/06 20:20	507.70			
SWPW-2	9/12/06 20:25	508.57			
SWPW-2	9/12/06 20:30	508.11			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/12/06 20:35	508.37			
SWPW-2	9/12/06 20:40	507.93			
SWPW-2	9/12/06 20:45	508.21			
SWPW-2	9/12/06 20:50	507.61			
SWPW-2	9/12/06 20:55	508.35			
SWPW-2	9/12/06 21:00	508.13			
SWPW-2	9/12/06 21:05	508.31			
SWPW-2	9/12/06 21:10	508.08			
SWPW-2	9/12/06 21:15	507.96			
SWPW-2	9/12/06 21:20	508.41			
SWPW-2	9/12/06 21:25	508.25			
SWPW-2	9/12/06 21:30	508.59			
SWPW-2	9/12/06 21:35	507.96			
SWPW-2	9/12/06 21:40	508.20			
SWPW-2	9/12/06 21:45	507.93			
SWPW-2	9/12/06 21:50	507.80			
SWPW-2	9/12/06 21:55	508.52			
SWPW-2	9/12/06 22:00	508.15			
SWPW-2	9/12/06 22:05	507.84			
SWPW-2	9/12/06 22:10	508.11			
SWPW-2	9/12/06 22:15	508.04			
SWPW-2	9/12/06 22:20	507.88			
SWPW-2	9/12/06 22:25	508.20			
SWPW-2	9/12/06 22:30	508.50			
SWPW-2	9/12/06 22:35	508.00			
SWPW-2	9/12/06 22:40	507.85			
SWPW-2	9/12/06 22:45	508.57			
SWPW-2	9/12/06 22:50	508.51			
SWPW-2	9/12/06 22:55	508.08			
SWPW-2	9/12/06 23:00	507.95			
SWPW-2	9/12/06 23:05	508.19			
SWPW-2	9/12/06 23:10	508.21			
SWPW-2	9/12/06 23:15	507.88			
SWPW-2	9/12/06 23:20	507.47			
SWPW-2	9/12/06 23:25	507.99			
SWPW-2	9/12/06 23:30	508.03			
SWPW-2	9/12/06 23:35	508.25			
SWPW-2	9/12/06 23:40	508.19			
SWPW-2	9/12/06 23:45	507.53			
SWPW-2	9/12/06 23:50	507.74			
SWPW-2	9/12/06 23:55	508.21			
SWPW-2	9/13/06 0:00	508.09			
SWPW-2	9/13/06 0:05	507.84			
SWPW-2	9/13/06 0:10	507.86			
SWPW-2	9/13/06 0:15	508.19			
SWPW-2	9/13/06 0:20	508.18			
SWPW-2	9/13/06 0:25	509.01			
SWPW-2	9/13/06 0:30	508.44			
SWPW-2	9/13/06 0:35	507.92			
SWPW-2	9/13/06 0:40	507.80			
SWPW-2	9/13/06 0:45	507.89			
SWPW-2	9/13/06 0:50	508.15			
SWPW-2	9/13/06 0:55	508.06			
SWPW-2	9/13/06 1:00	508.65			
SWPW-2	9/13/06 1:05	508.18			
SWPW-2	9/13/06 1:10	508.05			
SWPW-2	9/13/06 1:15	508.33			
SWPW-2	9/13/06 1:20	508.42			
SWPW-2	9/13/06 1:25	508.26			
SWPW-2	9/13/06 1:30	507.68			
SWPW-2	9/13/06 1:35	507.88			
SWPW-2	9/13/06 1:40	508.70			
SWPW-2	9/13/06 1:45	508.10			
SWPW-2	9/13/06 1:50	507.94			
SWPW-2	9/13/06 1:55	508.21			
SWPW-2	9/13/06 2:00	508.46			
SWPW-2	9/13/06 2:05	507.92			
SWPW-2	9/13/06 2:10	509.01			
SWPW-2	9/13/06 2:15	508.53			
SWPW-2	9/13/06 2:20	507.94			
SWPW-2	9/13/06 2:25	508.35			
SWPW-2	9/13/06 2:30	507.98			
SWPW-2	9/13/06 2:35	508.09			
SWPW-2	9/13/06 2:40	508.08			
SWPW-2	9/13/06 2:45	508.25			
SWPW-2	9/13/06 2:50	508.56			
SWPW-2	9/13/06 2:55	509.24			
SWPW-2	9/13/06 3:00	507.86			
SWPW-2	9/13/06 3:05	507.92			
SWPW-2	9/13/06 3:10	508.50			
SWPW-2	9/13/06 3:15	508.26			
SWPW-2	9/13/06 3:20	508.62			
SWPW-2	9/13/06 3:25	508.31			
SWPW-2	9/13/06 3:30	507.89			
SWPW-2	9/13/06 3:35	508.27			
SWPW-2	9/13/06 3:40	508.21			
SWPW-2	9/13/06 3:45	509.42			
SWPW-2	9/13/06 3:50	508.04			
SWPW-2	9/13/06 3:55	508.91			
SWPW-2	9/13/06 4:00	509.06			
SWPW-2	9/13/06 4:05	508.17			
SWPW-2	9/13/06 4:10	507.43			
SWPW-2	9/13/06 4:15	508.55			
SWPW-2	9/13/06 4:20	507.98			
SWPW-2	9/13/06 4:25	508.14			
SWPW-2	9/13/06 4:30	508.29			
SWPW-2	9/13/06 4:35	508.28			
SWPW-2	9/13/06 4:40	508.25			
SWPW-2	9/13/06 4:45	508.00			
SWPW-2	9/13/06 4:50	508.35			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/13/06 4:55	508.02			
SWPW-2	9/13/06 5:00	508.00			
SWPW-2	9/13/06 5:05	508.34			
SWPW-2	9/13/06 5:10	508.77			
SWPW-2	9/13/06 5:15	508.63			
SWPW-2	9/13/06 5:20	508.16			
SWPW-2	9/13/06 5:25	509.23			
SWPW-2	9/13/06 5:30	508.38			
SWPW-2	9/13/06 5:35	508.18			
SWPW-2	9/13/06 5:40	508.74			
SWPW-2	9/13/06 5:45	508.41			
SWPW-2	9/13/06 5:50	508.51			
SWPW-2	9/13/06 5:55	508.33			
SWPW-2	9/13/06 6:00	508.00			
SWPW-2	9/13/06 6:05	507.97			
SWPW-2	9/13/06 6:10	508.31			
SWPW-2	9/13/06 6:15	507.93			
SWPW-2	9/13/06 6:20	508.34			
SWPW-2	9/13/06 6:25	508.87			
SWPW-2	9/13/06 6:30	508.48			
SWPW-2	9/13/06 6:35	507.92			
SWPW-2	9/13/06 6:40	509.08			
SWPW-2	9/13/06 6:45	508.82			
SWPW-2	9/13/06 6:50	508.70			
SWPW-2	9/13/06 6:55	509.24			
SWPW-2	9/13/06 7:00	509.25			
SWPW-2	9/13/06 7:05	509.27			
SWPW-2	9/13/06 7:10	508.79			
SWPW-2	9/13/06 7:15	508.90			
SWPW-2	9/13/06 7:20	508.66			
SWPW-2	9/13/06 7:25	508.41			
SWPW-2	9/13/06 7:30	508.60			
SWPW-2	9/13/06 7:35	507.97			
SWPW-2	9/13/06 7:40	508.08			
SWPW-2	9/13/06 7:45	508.93			
SWPW-2	9/13/06 7:50	508.99			
SWPW-2	9/13/06 7:55	508.41			
SWPW-2	9/13/06 8:00	508.75			
SWPW-2	9/13/06 8:05	508.21			
SWPW-2	9/13/06 8:10	509.37			
SWPW-2	9/13/06 8:15	508.42			
SWPW-2	9/13/06 8:20	508.22			
SWPW-2	9/13/06 8:25	508.63			
SWPW-2	9/13/06 8:30	508.84			
SWPW-2	9/13/06 8:35	508.79			
SWPW-2	9/13/06 8:40	508.16			
SWPW-2	9/13/06 8:45	508.66			
SWPW-2	9/13/06 8:50	508.11			
SWPW-2	9/13/06 8:55	508.58			
SWPW-2	9/13/06 9:00	508.51			
SWPW-2	9/13/06 9:05	508.12			
SWPW-2	9/13/06 9:10	508.38			
SWPW-2	9/13/06 9:15	509.22			
SWPW-2	9/13/06 9:20	508.75			
SWPW-2	9/13/06 9:25	508.48			
SWPW-2	9/13/06 9:30	508.28			
SWPW-2	9/13/06 9:35	507.84			
SWPW-2	9/13/06 9:40	508.56			
SWPW-2	9/13/06 9:45	508.16			
SWPW-2	9/13/06 9:50	508.33			
SWPW-2	9/13/06 9:55	508.66			
SWPW-2	9/13/06 10:00	508.30			
SWPW-2	9/13/06 10:05	508.54			
SWPW-2	9/13/06 10:10	508.71			
SWPW-2	9/13/06 10:15	509.17			
SWPW-2	9/13/06 10:20	508.92			
SWPW-2	9/13/06 10:25	508.08			
SWPW-2	9/13/06 10:30	508.23			
SWPW-2	9/13/06 10:35	508.47			
SWPW-2	9/13/06 10:40	508.62			
SWPW-2	9/13/06 10:45	508.27			
SWPW-2	9/13/06 10:50	508.12			
SWPW-2	9/13/06 10:55	508.59			
SWPW-2	9/13/06 11:00	508.59			
SWPW-2	9/13/06 11:05	508.67			
SWPW-2	9/13/06 11:10	507.77			
SWPW-2	9/13/06 11:15	508.35			
SWPW-2	9/13/06 11:20	508.43			
SWPW-2	9/13/06 11:25	508.75			
SWPW-2	9/13/06 11:30	508.83			
SWPW-2	9/13/06 11:35	507.92			
SWPW-2	9/13/06 11:40	508.59			
SWPW-2	9/13/06 11:45	508.99			
SWPW-2	9/13/06 11:50	507.18			
SWPW-2	9/13/06 11:55	508.04			
SWPW-2	9/13/06 12:00	509.34			
SWPW-2	9/13/06 12:05	508.53			
SWPW-2	9/13/06 12:10	508.50			
SWPW-2	9/13/06 12:15	509.42			
SWPW-2	9/13/06 12:20	508.49			
SWPW-2	9/13/06 12:25	508.46			
SWPW-2	9/13/06 12:30	509.80			
SWPW-2	9/13/06 12:35	508.18			
SWPW-2	9/13/06 12:40	509.36			
SWPW-2	9/13/06 12:45	508.82			
SWPW-2	9/13/06 12:50	509.19			
SWPW-2	9/13/06 12:55	508.58			
SWPW-2	9/13/06 13:00	508.37			
SWPW-2	9/13/06 13:05	509.37			
SWPW-2	9/13/06 13:10	508.91			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/13/06 13:15	509.55			
SWPW-2	9/13/06 13:20	507.89			
SWPW-2	9/13/06 13:25	508.10			
SWPW-2	9/13/06 13:30	509.49			
SWPW-2	9/13/06 13:35	509.33			
SWPW-2	9/13/06 13:40	508.25			
SWPW-2	9/13/06 13:45	508.90			
SWPW-2	9/13/06 13:50	509.27			
SWPW-2	9/13/06 13:55	509.01			
SWPW-2	9/13/06 14:00	507.55			
SWPW-2	9/13/06 14:05	508.67			
SWPW-2	9/13/06 14:10	509.73			
SWPW-2	9/13/06 14:15	509.97			
SWPW-2	9/13/06 14:20	508.83			
SWPW-2	9/13/06 14:25	509.07			
SWPW-2	9/13/06 14:30	508.97			
SWPW-2	9/13/06 14:35	508.65			
SWPW-2	9/13/06 14:40	509.60			
SWPW-2	9/13/06 14:45	508.49			
SWPW-2	9/13/06 14:50	509.27			
SWPW-2	9/13/06 14:55	508.70			
SWPW-2	9/13/06 15:00	508.47			
SWPW-2	9/13/06 15:05	507.83			
SWPW-2	9/13/06 15:10	508.35			
SWPW-2	9/13/06 15:15	508.44			
SWPW-2	9/13/06 15:20	508.79			
SWPW-2	9/13/06 15:25	508.60			
SWPW-2	9/13/06 15:30	509.65			
SWPW-2	9/13/06 15:35	509.31			
SWPW-2	9/13/06 15:40	509.33			
SWPW-2	9/13/06 15:45	508.94			
SWPW-2	9/13/06 15:50	508.70			
SWPW-2	9/13/06 15:55	509.35			
SWPW-2	9/13/06 16:00	509.15			
SWPW-2	9/13/06 16:05	509.63			
SWPW-2	9/13/06 16:10	508.62			
SWPW-2	9/13/06 16:15	508.82			
SWPW-2	9/13/06 16:20	509.66			
SWPW-2	9/13/06 16:25	509.53			
SWPW-2	9/13/06 16:30	509.97			
SWPW-2	9/13/06 16:35	509.56			
SWPW-2	9/13/06 16:40	508.70			
SWPW-2	9/13/06 16:45	509.84			
SWPW-2	9/13/06 16:50	508.98			
SWPW-2	9/13/06 16:55	509.79			
SWPW-2	9/13/06 17:00	509.67			
SWPW-2	9/13/06 17:05	509.19			
SWPW-2	9/13/06 17:10	509.38			
SWPW-2	9/13/06 17:15	509.09			
SWPW-2	9/13/06 17:20	509.51			
SWPW-2	9/13/06 17:25	509.95			
SWPW-2	9/13/06 17:30	509.32			
SWPW-2	9/13/06 17:35	508.43			
SWPW-2	9/13/06 17:40	509.45			
SWPW-2	9/13/06 17:45	510.16			
SWPW-2	9/13/06 17:50	509.83			
SWPW-2	9/13/06 17:55	509.41			
SWPW-2	9/13/06 18:00	508.11			
SWPW-2	9/13/06 18:05	508.77			
SWPW-2	9/13/06 18:10	509.54			
SWPW-2	9/13/06 18:15	509.80			
SWPW-2	9/13/06 18:20	509.80			
SWPW-2	9/13/06 18:25	509.01			
SWPW-2	9/13/06 18:30	509.65			
SWPW-2	9/13/06 18:35	509.07			
SWPW-2	9/13/06 18:40	508.94			
SWPW-2	9/13/06 18:45	509.33			
SWPW-2	9/13/06 18:50	508.47			
SWPW-2	9/13/06 18:55	509.33			
SWPW-2	9/13/06 19:00	509.02			
SWPW-2	9/13/06 19:05	509.05			
SWPW-2	9/13/06 19:10	509.49			
SWPW-2	9/13/06 19:15	508.88			
SWPW-2	9/13/06 19:20	509.61			
SWPW-2	9/13/06 19:25	509.14			
SWPW-2	9/13/06 19:30	508.79			
SWPW-2	9/13/06 19:35	509.00			
SWPW-2	9/13/06 19:40	508.70			
SWPW-2	9/13/06 19:45	508.87			
SWPW-2	9/13/06 19:50	509.35			
SWPW-2	9/13/06 19:55	509.22			
SWPW-2	9/13/06 20:00	509.25			
SWPW-2	9/13/06 20:05	508.88			
SWPW-2	9/13/06 20:10	508.66			
SWPW-2	9/13/06 20:15	508.53			
SWPW-2	9/13/06 20:20	508.74			
SWPW-2	9/13/06 20:25	509.43			
SWPW-2	9/13/06 20:30	509.50			
SWPW-2	9/13/06 20:35	508.83			
SWPW-2	9/13/06 20:40	509.23			
SWPW-2	9/13/06 20:45	508.95			
SWPW-2	9/13/06 20:50	508.98			
SWPW-2	9/13/06 20:55	509.68			
SWPW-2	9/13/06 21:00	508.89			
SWPW-2	9/13/06 21:05	508.60			
SWPW-2	9/13/06 21:10	509.29			
SWPW-2	9/13/06 21:15	509.26			
SWPW-2	9/13/06 21:20	509.13			
SWPW-2	9/13/06 21:25	509.21			
SWPW-2	9/13/06 21:30	508.90			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/13/06 21:35	509.07			
SWPW-2	9/13/06 21:40	508.78			
SWPW-2	9/13/06 21:45	508.73			
SWPW-2	9/13/06 21:50	509.24			
SWPW-2	9/13/06 21:55	509.65			
SWPW-2	9/13/06 22:00	509.11			
SWPW-2	9/13/06 22:05	508.52			
SWPW-2	9/13/06 22:10	509.36			
SWPW-2	9/13/06 22:15	509.10			
SWPW-2	9/13/06 22:20	509.28			
SWPW-2	9/13/06 22:25	509.14			
SWPW-2	9/13/06 22:30	509.27			
SWPW-2	9/13/06 22:35	509.30			
SWPW-2	9/13/06 22:40	509.03			
SWPW-2	9/13/06 22:45	509.17			
SWPW-2	9/13/06 22:50	509.27			
SWPW-2	9/13/06 22:55	509.27			
SWPW-2	9/13/06 23:00	509.64			
SWPW-2	9/13/06 23:05	508.90			
SWPW-2	9/13/06 23:10	509.56			
SWPW-2	9/13/06 23:15	509.36			
SWPW-2	9/13/06 23:20	508.94			
SWPW-2	9/13/06 23:25	508.93			
SWPW-2	9/13/06 23:30	509.26			
SWPW-2	9/13/06 23:35	509.13			
SWPW-2	9/13/06 23:40	509.32			
SWPW-2	9/13/06 23:45	508.93			
SWPW-2	9/13/06 23:50	509.08			
SWPW-2	9/13/06 23:55	509.39			
SWPW-2	9/14/06 0:00	508.86			
SWPW-2	9/14/06 0:05	509.12			
SWPW-2	9/14/06 0:10	509.24			
SWPW-2	9/14/06 0:15	509.26			
SWPW-2	9/14/06 0:20	509.35			
SWPW-2	9/14/06 0:25	508.78			
SWPW-2	9/14/06 0:30	509.39			
SWPW-2	9/14/06 0:35	509.70			
SWPW-2	9/14/06 0:40	509.28			
SWPW-2	9/14/06 0:45	509.09			
SWPW-2	9/14/06 0:50	509.07			
SWPW-2	9/14/06 0:55	509.49			
SWPW-2	9/14/06 1:00	509.10			
SWPW-2	9/14/06 1:05	509.12			
SWPW-2	9/14/06 1:10	509.19			
SWPW-2	9/14/06 1:15	509.10			
SWPW-2	9/14/06 1:20	509.32			
SWPW-2	9/14/06 1:25	509.26			
SWPW-2	9/14/06 1:30	509.84			
SWPW-2	9/14/06 1:35	509.11			
SWPW-2	9/14/06 1:40	509.35			
SWPW-2	9/14/06 1:45	509.10			
SWPW-2	9/14/06 1:50	509.33			
SWPW-2	9/14/06 1:55	509.18			
SWPW-2	9/14/06 2:00	508.88			
SWPW-2	9/14/06 2:05	508.75			
SWPW-2	9/14/06 2:10	509.77			
SWPW-2	9/14/06 2:15	509.40			
SWPW-2	9/14/06 2:20	509.53			
SWPW-2	9/14/06 2:25	509.34			
SWPW-2	9/14/06 2:30	508.80			
SWPW-2	9/14/06 2:35	509.55			
SWPW-2	9/14/06 2:40	509.48			
SWPW-2	9/14/06 2:45	509.84			
SWPW-2	9/14/06 2:50	509.42			
SWPW-2	9/14/06 2:55	509.10			
SWPW-2	9/14/06 3:00	509.87			
SWPW-2	9/14/06 3:05	509.79			
SWPW-2	9/14/06 3:10	509.80			
SWPW-2	9/14/06 3:15	509.63			
SWPW-2	9/14/06 3:20	509.73			
SWPW-2	9/14/06 3:25	509.96			
SWPW-2	9/14/06 3:30	509.57			
SWPW-2	9/14/06 3:35	509.59			
SWPW-2	9/14/06 3:40	509.52			
SWPW-2	9/14/06 3:45	509.25			
SWPW-2	9/14/06 3:50	509.72			
SWPW-2	9/14/06 3:55	510.03			
SWPW-2	9/14/06 4:00	509.66			
SWPW-2	9/14/06 4:05	509.69			
SWPW-2	9/14/06 4:10	509.72			
SWPW-2	9/14/06 4:15	509.81			
SWPW-2	9/14/06 4:20	509.12			
SWPW-2	9/14/06 4:25	509.28			
SWPW-2	9/14/06 4:30	509.65			
SWPW-2	9/14/06 4:35	509.28			
SWPW-2	9/14/06 4:40	509.60			
SWPW-2	9/14/06 4:45	509.77			
SWPW-2	9/14/06 4:50	509.72			
SWPW-2	9/14/06 4:55	509.42			
SWPW-2	9/14/06 5:00	509.65			
SWPW-2	9/14/06 5:05	509.67			
SWPW-2	9/14/06 5:10	509.71			
SWPW-2	9/14/06 5:15	509.50			
SWPW-2	9/14/06 5:20	508.96			
SWPW-2	9/14/06 5:25	509.35			
SWPW-2	9/14/06 5:30	509.67			
SWPW-2	9/14/06 5:35	509.78			
SWPW-2	9/14/06 5:40	509.22			
SWPW-2	9/14/06 5:45	509.59			
SWPW-2	9/14/06 5:50	509.07			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/14/06 5:55	509.27			
SWPW-2	9/14/06 6:00	509.59			
SWPW-2	9/14/06 6:05	509.72			
SWPW-2	9/14/06 6:10	509.33			
SWPW-2	9/14/06 6:15	508.98			
SWPW-2	9/14/06 6:20	510.36			
SWPW-2	9/14/06 6:25	509.50			
SWPW-2	9/14/06 6:30	509.28			
SWPW-2	9/14/06 6:35	509.21			
SWPW-2	9/14/06 6:40	509.67			
SWPW-2	9/14/06 6:45	509.56			
SWPW-2	9/14/06 6:50	509.88			
SWPW-2	9/14/06 6:55	509.51			
SWPW-2	9/14/06 7:00	509.33			
SWPW-2	9/14/06 7:05	509.71			
SWPW-2	9/14/06 7:10	509.44			
SWPW-2	9/14/06 7:15	509.23			
SWPW-2	9/14/06 7:20	509.14			
SWPW-2	9/14/06 7:25	509.56			
SWPW-2	9/14/06 7:30	509.47			
SWPW-2	9/14/06 7:35	509.17			
SWPW-2	9/14/06 7:40	510.40			
SWPW-2	9/14/06 7:45	509.29			
SWPW-2	9/14/06 7:50	509.31			
SWPW-2	9/14/06 7:55	510.32			
SWPW-2	9/14/06 8:00	509.76			
SWPW-2	9/14/06 8:05	510.04			
SWPW-2	9/14/06 8:10	510.29			
SWPW-2	9/14/06 8:15	509.42			
SWPW-2	9/14/06 8:20	509.56			
SWPW-2	9/14/06 8:25	509.61			
SWPW-2	9/14/06 8:30	509.57			
SWPW-2	9/14/06 8:35	510.19			
SWPW-2	9/14/06 8:40	509.25			
SWPW-2	9/14/06 8:45	509.49			
SWPW-2	9/14/06 8:50	509.21			
SWPW-2	9/14/06 8:55	509.46			
SWPW-2	9/14/06 9:00	509.56			
SWPW-2	9/14/06 9:05	509.81			
SWPW-2	9/14/06 9:10	509.58			
SWPW-2	9/14/06 9:15	509.69			
SWPW-2	9/14/06 9:20	510.24			
SWPW-2	9/14/06 9:25	510.39			
SWPW-2	9/14/06 9:30	509.58			
SWPW-2	9/14/06 9:35	509.55			
SWPW-2	9/14/06 9:40	510.11			
SWPW-2	9/14/06 9:45	509.77			
SWPW-2	9/14/06 9:50	509.86			
SWPW-2	9/14/06 9:55	510.00			
SWPW-2	9/14/06 10:00	510.09			
SWPW-2	9/14/06 10:05	509.08			
SWPW-2	9/14/06 10:10	509.95			
SWPW-2	9/14/06 10:15	509.26			
SWPW-2	9/14/06 10:20	509.82			
SWPW-2	9/14/06 10:25	509.80			
SWPW-2	9/14/06 10:30	510.13			
SWPW-2	9/14/06 10:35	509.68			
SWPW-2	9/14/06 10:40	509.81			
SWPW-2	9/14/06 10:45	510.14			
SWPW-2	9/14/06 10:50	510.47			
SWPW-2	9/14/06 10:55	509.68			
SWPW-2	9/14/06 11:00	510.09			
SWPW-2	9/14/06 11:05	510.28			
SWPW-2	9/14/06 11:10	509.47			
SWPW-2	9/14/06 11:15	510.26			
SWPW-2	9/14/06 11:20	510.59			
SWPW-2	9/14/06 11:25	510.11			
SWPW-2	9/14/06 11:30	509.78			
SWPW-2	9/14/06 11:35	509.71			
SWPW-2	9/14/06 11:40	510.34			
SWPW-2	9/14/06 11:45	510.58			
SWPW-2	9/14/06 11:50	511.06			
SWPW-2	9/14/06 11:55	509.70			
SWPW-2	9/14/06 12:00	509.98			
SWPW-2	9/14/06 12:05	509.73			
SWPW-2	9/14/06 12:10	510.16			
SWPW-2	9/14/06 12:15	510.13			
SWPW-2	9/14/06 12:20	509.28			
SWPW-2	9/14/06 12:25	509.58			
SWPW-2	9/14/06 12:30	509.72			
SWPW-2	9/14/06 12:35	510.66			
SWPW-2	9/14/06 12:40	509.77			
SWPW-2	9/14/06 12:45	510.10			
SWPW-2	9/14/06 12:50	509.50			
SWPW-2	9/14/06 12:55	510.14			
SWPW-2	9/14/06 13:00	510.34			
SWPW-2	9/14/06 13:05	509.69			
SWPW-2	9/14/06 13:10	509.93			
SWPW-2	9/14/06 13:15	510.14			
SWPW-2	9/14/06 13:20	509.25			
SWPW-2	9/14/06 13:25	510.19			
SWPW-2	9/14/06 13:30	510.03			
SWPW-2	9/14/06 13:35	509.01			
SWPW-2	9/14/06 13:40	510.15			
SWPW-2	9/14/06 13:45	509.84			
SWPW-2	9/14/06 13:50	509.75			
SWPW-2	9/14/06 13:55	510.23			
SWPW-2	9/14/06 14:00	509.95			
SWPW-2	9/14/06 14:05	511.09			
SWPW-2	9/14/06 14:10	510.31			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/14/06 14:15	510.18			
SWPW-2	9/14/06 14:20	510.35			
SWPW-2	9/14/06 14:25	510.34			
SWPW-2	9/14/06 14:30	510.75			
SWPW-2	9/14/06 14:35	508.96			
SWPW-2	9/14/06 14:40	509.82			
SWPW-2	9/14/06 14:45	509.76			
SWPW-2	9/14/06 14:50	509.18			
SWPW-2	9/14/06 14:55	509.44			
SWPW-2	9/14/06 15:00	509.69			
SWPW-2	9/14/06 15:05	508.79			
SWPW-2	9/14/06 15:10	510.38			
SWPW-2	9/14/06 15:15	510.79			
SWPW-2	9/14/06 15:20	510.34			
SWPW-2	9/14/06 15:25	509.88			
SWPW-2	9/14/06 15:30	510.24			
SWPW-2	9/14/06 15:35	510.21			
SWPW-2	9/14/06 15:40	510.32			
SWPW-2	9/14/06 15:45	509.63			
SWPW-2	9/14/06 15:50	510.55			
SWPW-2	9/14/06 15:55	510.12			
SWPW-2	9/14/06 16:00	510.29			
SWPW-2	9/14/06 16:05	510.52			
SWPW-2	9/14/06 16:10	510.19			
SWPW-2	9/14/06 16:15	509.66			
SWPW-2	9/14/06 16:20	509.55			
SWPW-2	9/14/06 16:25	509.50			
SWPW-2	9/14/06 16:30	510.57			
SWPW-2	9/14/06 16:35	510.05			
SWPW-2	9/14/06 16:40	510.45			
SWPW-2	9/14/06 16:45	510.28			
SWPW-2	9/14/06 16:50	510.96			
SWPW-2	9/14/06 16:55	509.76			
SWPW-2	9/14/06 17:00	509.97			
SWPW-2	9/14/06 17:05	509.32			
SWPW-2	9/14/06 17:10	510.41			
SWPW-2	9/14/06 17:15	509.51			
SWPW-2	9/14/06 17:20	510.02			
SWPW-2	9/14/06 17:25	510.31			
SWPW-2	9/14/06 17:30	510.70			
SWPW-2	9/14/06 17:35	510.51			
SWPW-2	9/14/06 17:40	510.02			
SWPW-2	9/14/06 17:45	510.17			
SWPW-2	9/14/06 17:50	509.80			
SWPW-2	9/14/06 17:55	510.18			
SWPW-2	9/14/06 18:00	509.31			
SWPW-2	9/14/06 18:05	509.78			
SWPW-2	9/14/06 18:10	509.70			
SWPW-2	9/14/06 18:15	509.15			
SWPW-2	9/14/06 18:20	510.11			
SWPW-2	9/14/06 18:25	509.91			
SWPW-2	9/14/06 18:30	509.74			
SWPW-2	9/14/06 18:35	509.63			
SWPW-2	9/14/06 18:40	509.60			
SWPW-2	9/14/06 18:45	509.81			
SWPW-2	9/14/06 18:50	509.73			
SWPW-2	9/14/06 18:55	510.11			
SWPW-2	9/14/06 19:00	509.50			
SWPW-2	9/14/06 19:05	509.81			
SWPW-2	9/14/06 19:10	509.55			
SWPW-2	9/14/06 19:15	510.29			
SWPW-2	9/14/06 19:20	510.43			
SWPW-2	9/14/06 19:25	509.77			
SWPW-2	9/14/06 19:30	510.16			
SWPW-2	9/14/06 19:35	509.83			
SWPW-2	9/14/06 19:40	508.76			
SWPW-2	9/14/06 19:45	509.29			
SWPW-2	9/14/06 19:50	509.73			
SWPW-2	9/14/06 19:55	509.67			
SWPW-2	9/14/06 20:00	509.91			
SWPW-2	9/14/06 20:05	509.68			
SWPW-2	9/14/06 20:10	510.03			
SWPW-2	9/14/06 20:15	510.15			
SWPW-2	9/14/06 20:20	509.98			
SWPW-2	9/14/06 20:25	509.83			
SWPW-2	9/14/06 20:30	510.37			
SWPW-2	9/14/06 20:35	510.31			
SWPW-2	9/14/06 20:40	509.73			
SWPW-2	9/14/06 20:45	509.74			
SWPW-2	9/14/06 20:50	510.13			
SWPW-2	9/14/06 20:55	509.42			
SWPW-2	9/14/06 21:00	509.66			
SWPW-2	9/14/06 21:05	509.96			
SWPW-2	9/14/06 21:10	509.94			
SWPW-2	9/14/06 21:15	510.15			
SWPW-2	9/14/06 21:20	509.87			
SWPW-2	9/14/06 21:25	509.80			
SWPW-2	9/14/06 21:30	509.89			
SWPW-2	9/14/06 21:35	509.24			
SWPW-2	9/14/06 21:40	509.68			
SWPW-2	9/14/06 21:45	510.04			
SWPW-2	9/14/06 21:50	509.79			
SWPW-2	9/14/06 21:55	509.75			
SWPW-2	9/14/06 22:00	509.77			
SWPW-2	9/14/06 22:05	510.08			
SWPW-2	9/14/06 22:10	510.27			
SWPW-2	9/14/06 22:15	509.32			
SWPW-2	9/14/06 22:20	509.97			
SWPW-2	9/14/06 22:25	509.69			
SWPW-2	9/14/06 22:30	509.98			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/14/06 22:35	509.48			
SWPW-2	9/14/06 22:40	510.01			
SWPW-2	9/14/06 22:45	509.94			
SWPW-2	9/14/06 22:50	510.12			
SWPW-2	9/14/06 22:55	510.07			
SWPW-2	9/14/06 23:00	509.94			
SWPW-2	9/14/06 23:05	509.63			
SWPW-2	9/14/06 23:10	509.54			
SWPW-2	9/14/06 23:15	509.61			
SWPW-2	9/14/06 23:20	509.39			
SWPW-2	9/14/06 23:25	509.78			
SWPW-2	9/14/06 23:30	509.44			
SWPW-2	9/14/06 23:35	510.04			
SWPW-2	9/14/06 23:40	509.53			
SWPW-2	9/14/06 23:45	510.04			
SWPW-2	9/14/06 23:50	509.63			
SWPW-2	9/14/06 23:55	509.37			
SWPW-2	9/15/06 0:00	509.63			
SWPW-2	9/15/06 0:05	509.51			
SWPW-2	9/15/06 0:10	509.36			
SWPW-2	9/15/06 0:15	509.58			
SWPW-2	9/15/06 0:20	509.59			
SWPW-2	9/15/06 0:25	509.86			
SWPW-2	9/15/06 0:30	509.05			
SWPW-2	9/15/06 0:35	509.71			
SWPW-2	9/15/06 0:40	509.52			
SWPW-2	9/15/06 0:45	509.79			
SWPW-2	9/15/06 0:50	510.10			
SWPW-2	9/15/06 0:55	509.35			
SWPW-2	9/15/06 1:00	509.51			
SWPW-2	9/15/06 1:05	509.84			
SWPW-2	9/15/06 1:10	509.41			
SWPW-2	9/15/06 1:15	509.51			
SWPW-2	9/15/06 1:20	509.36			
SWPW-2	9/15/06 1:25	509.98			
SWPW-2	9/15/06 1:30	510.05			
SWPW-2	9/15/06 1:35	510.09			
SWPW-2	9/15/06 1:40	509.54			
SWPW-2	9/15/06 1:45	509.95			
SWPW-2	9/15/06 1:50	509.94			
SWPW-2	9/15/06 1:55	509.38			
SWPW-2	9/15/06 2:00	509.87			
SWPW-2	9/15/06 2:05	509.98			
SWPW-2	9/15/06 2:10	509.68			
SWPW-2	9/15/06 2:15	509.13			
SWPW-2	9/15/06 2:20	509.72			
SWPW-2	9/15/06 2:25	509.39			
SWPW-2	9/15/06 2:30	510.25			
SWPW-2	9/15/06 2:35	509.70			
SWPW-2	9/15/06 2:40	510.13			
SWPW-2	9/15/06 2:45	509.97			
SWPW-2	9/15/06 2:50	509.57			
SWPW-2	9/15/06 2:55	509.79			
SWPW-2	9/15/06 3:00	509.78			
SWPW-2	9/15/06 3:05	509.92			
SWPW-2	9/15/06 3:10	509.77			
SWPW-2	9/15/06 3:15	509.34			
SWPW-2	9/15/06 3:20	509.47			
SWPW-2	9/15/06 3:25	510.08			
SWPW-2	9/15/06 3:30	509.74			
SWPW-2	9/15/06 3:35	510.00			
SWPW-2	9/15/06 3:40	509.30			
SWPW-2	9/15/06 3:45	510.01			
SWPW-2	9/15/06 3:50	510.04			
SWPW-2	9/15/06 3:55	509.86			
SWPW-2	9/15/06 4:00	510.14			
SWPW-2	9/15/06 4:05	509.67			
SWPW-2	9/15/06 4:10	509.70			
SWPW-2	9/15/06 4:15	510.46			
SWPW-2	9/15/06 4:20	509.88			
SWPW-2	9/15/06 4:25	509.93			
SWPW-2	9/15/06 4:30	510.01			
SWPW-2	9/15/06 4:35	510.78			
SWPW-2	9/15/06 4:40	509.91			
SWPW-2	9/15/06 4:45	509.84			
SWPW-2	9/15/06 4:50	510.26			
SWPW-2	9/15/06 4:55	509.64			
SWPW-2	9/15/06 5:00	509.90			
SWPW-2	9/15/06 5:05	509.66			
SWPW-2	9/15/06 5:10	509.78			
SWPW-2	9/15/06 5:15	509.67			
SWPW-2	9/15/06 5:20	509.86			
SWPW-2	9/15/06 5:25	509.78			
SWPW-2	9/15/06 5:30	509.83			
SWPW-2	9/15/06 5:35	509.58			
SWPW-2	9/15/06 5:40	510.13			
SWPW-2	9/15/06 5:45	510.03			
SWPW-2	9/15/06 5:50	510.18			
SWPW-2	9/15/06 5:55	510.12			
SWPW-2	9/15/06 6:00	509.65			
SWPW-2	9/15/06 6:05	509.33			
SWPW-2	9/15/06 6:10	509.72			
SWPW-2	9/15/06 6:15	509.83			
SWPW-2	9/15/06 6:20	509.60			
SWPW-2	9/15/06 6:25	509.87			
SWPW-2	9/15/06 6:30	510.22			
SWPW-2	9/15/06 6:35	510.20			
SWPW-2	9/15/06 6:40	509.69			
SWPW-2	9/15/06 6:45	510.25			
SWPW-2	9/15/06 6:50	510.01			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/15/06 8:55	509.99			
SWPW-2	9/15/06 7:00	509.87			
SWPW-2	9/15/06 7:05	510.12			
SWPW-2	9/15/06 7:10	509.57			
SWPW-2	9/15/06 7:15	509.86			
SWPW-2	9/15/06 7:20	509.34			
SWPW-2	9/15/06 7:25	510.03			
SWPW-2	9/15/06 7:30	510.33			
SWPW-2	9/15/06 7:35	510.30			
SWPW-2	9/15/06 7:40	509.91			
SWPW-2	9/15/06 7:45	510.12			
SWPW-2	9/15/06 7:50	510.31			
SWPW-2	9/15/06 7:55	509.76			
SWPW-2	9/15/06 8:00	509.41			
SWPW-2	9/15/06 8:05	509.98			
SWPW-2	9/15/06 8:10	509.84			
SWPW-2	9/15/06 8:15	509.72			
SWPW-2	9/15/06 8:20	510.35			
SWPW-2	9/15/06 8:25	510.16			
SWPW-2	9/15/06 8:30	510.47			
SWPW-2	9/15/06 8:35	511.13			
SWPW-2	9/15/06 8:40	509.38			
SWPW-2	9/15/06 8:45	510.28			
SWPW-2	9/15/06 8:50	510.50			
SWPW-2	9/15/06 8:55	510.64			
SWPW-2	9/15/06 9:00	510.54			
SWPW-2	9/15/06 9:05	510.40			
SWPW-2	9/15/06 9:10	510.62			
SWPW-2	9/15/06 9:15	509.80			
SWPW-2	9/15/06 9:20	510.45			
SWPW-2	9/15/06 9:25	510.31			
SWPW-2	9/15/06 9:30	510.45			
SWPW-2	9/15/06 9:35	510.62			
SWPW-2	9/15/06 9:40	510.13			
SWPW-2	9/15/06 9:45	510.64			
SWPW-2	9/15/06 9:50	510.37			
SWPW-2	9/15/06 9:55	510.46			
SWPW-2	9/15/06 10:00	510.30			
SWPW-2	9/15/06 10:05	510.52			
SWPW-2	9/15/06 10:10	510.03			
SWPW-2	9/15/06 10:15	510.90			
SWPW-2	9/15/06 10:20	510.62			
SWPW-2	9/15/06 10:25	510.25			
SWPW-2	9/15/06 10:30	510.49			
SWPW-2	9/15/06 10:35	509.83			
SWPW-2	9/15/06 10:40	510.44			
SWPW-2	9/15/06 10:45	510.69			
SWPW-2	9/15/06 10:50	510.54			
SWPW-2	9/15/06 10:55	510.45			
SWPW-2	9/15/06 11:00	510.08			
SWPW-2	9/15/06 11:05	510.41			
SWPW-2	9/15/06 11:10	510.27			
SWPW-2	9/15/06 11:15	509.97			
SWPW-2	9/15/06 11:20	510.57			
SWPW-2	9/15/06 11:25	510.76			
SWPW-2	9/15/06 11:30	510.56			
SWPW-2	9/15/06 11:35	510.20			
SWPW-2	9/15/06 11:40	510.88			
SWPW-2	9/15/06 11:45	511.11			
SWPW-2	9/15/06 11:50	510.51			
SWPW-2	9/15/06 11:55	510.74			
SWPW-2	9/15/06 12:00	511.19			
SWPW-2	9/15/06 12:05	510.55			
SWPW-2	9/15/06 12:10	510.12			
SWPW-2	9/15/06 12:15	510.34			
SWPW-2	9/15/06 12:20	511.14			
SWPW-2	9/15/06 12:25	510.72			
SWPW-2	9/15/06 12:30	510.78			
SWPW-2	9/15/06 12:35	510.34			
SWPW-2	9/15/06 12:40	510.66			
SWPW-2	9/15/06 12:45	510.93			
SWPW-2	9/15/06 12:50	510.52			
SWPW-2	9/15/06 12:55	510.62			
SWPW-2	9/15/06 13:00	494.79			
SWPW-2	9/15/06 13:05	476.59			
SWPW-2	9/15/06 13:10	474.10			
SWPW-2	9/15/06 13:15	472.60			
SWPW-2	9/15/06 13:20	471.49			
SWPW-2	9/15/06 13:25	470.58			
SWPW-2	9/15/06 13:30	469.82			
SWPW-2	9/15/06 13:35	469.13			
SWPW-2	9/15/06 13:40	468.57			
SWPW-2	9/15/06 13:45	468.01			
SWPW-2	9/15/06 13:50	467.50			
SWPW-2	9/15/06 13:55	467.04			
SWPW-2	9/15/06 14:00	466.64			
SWPW-2	9/15/06 14:05	466.24			
SWPW-2	9/15/06 14:10	465.89			
SWPW-2	9/15/06 14:15	465.53			
SWPW-2	9/15/06 14:20	465.21			
SWPW-2	9/15/06 14:25	464.92			
SWPW-2	9/15/06 14:30	464.64			
SWPW-2	9/15/06 14:35	464.34			
SWPW-2	9/15/06 14:40	464.07			
SWPW-2	9/15/06 14:45	463.82			
SWPW-2	9/15/06 14:50	463.59			
SWPW-2	9/15/06 14:55	463.37			
SWPW-2	9/15/06 15:00	463.16			
SWPW-2	9/15/06 15:05	462.94			
SWPW-2	9/15/06 15:10	462.74			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/15/06 15:15	462.53			
SWPW-2	9/15/06 15:20	462.38			
SWPW-2	9/15/06 15:25	462.17			
SWPW-2	9/15/06 15:30	462.02			
SWPW-2	9/15/06 15:35	461.86			
SWPW-2	9/15/06 15:40	461.65			
SWPW-2	9/15/06 15:45	461.51			
SWPW-2	9/15/06 15:50	461.37			
SWPW-2	9/15/06 15:55	461.22			
SWPW-2	9/15/06 16:00	461.07			
SWPW-2	9/15/06 16:05	460.97			
SWPW-2	9/15/06 16:10	460.83			
SWPW-2	9/15/06 16:15	460.68			
SWPW-2	9/15/06 16:20	460.56			
SWPW-2	9/15/06 16:25	460.43			
SWPW-2	9/15/06 16:30	460.33			
SWPW-2	9/15/06 16:35	460.18			
SWPW-2	9/15/06 16:40	460.06			
SWPW-2	9/15/06 16:45	459.95			
SWPW-2	9/15/06 16:50	459.88			
SWPW-2	9/15/06 16:55	459.75			
SWPW-2	9/15/06 17:00	459.63			
SWPW-2	9/15/06 17:05	459.52			
SWPW-2	9/15/06 17:10	459.42			
SWPW-2	9/15/06 17:15	459.33			
SWPW-2	9/15/06 17:20	459.24			
SWPW-2	9/15/06 17:25	459.14			
SWPW-2	9/15/06 17:30	459.04			
SWPW-2	9/15/06 17:35	458.95			
SWPW-2	9/15/06 17:40	458.86			
SWPW-2	9/15/06 17:45	458.76			
SWPW-2	9/15/06 17:50	458.69			
SWPW-2	9/15/06 17:55	458.62			
SWPW-2	9/15/06 18:00	458.54			
SWPW-2	9/15/06 18:05	458.45			
SWPW-2	9/15/06 18:10	458.38			
SWPW-2	9/15/06 18:15	458.27			
SWPW-2	9/15/06 18:20	458.20			
SWPW-2	9/15/06 18:25	458.11			
SWPW-2	9/15/06 18:30	458.04			
SWPW-2	9/15/06 18:35	457.95			
SWPW-2	9/15/06 18:40	457.87			
SWPW-2	9/15/06 18:45	457.80			
SWPW-2	9/15/06 18:50	457.72			
SWPW-2	9/15/06 18:55	457.64			
SWPW-2	9/15/06 19:00	457.61			
SWPW-2	9/15/06 19:05	457.53			
SWPW-2	9/15/06 19:10	457.43			
SWPW-2	9/15/06 19:15	457.39			
SWPW-2	9/15/06 19:20	457.33			
SWPW-2	9/15/06 19:25	457.26			
SWPW-2	9/15/06 19:30	457.20			
SWPW-2	9/15/06 19:35	457.13			
SWPW-2	9/15/06 19:40	457.07			
SWPW-2	9/15/06 19:45	457.00			
SWPW-2	9/15/06 19:50	456.98			
SWPW-2	9/15/06 19:55	456.92			
SWPW-2	9/15/06 20:00	456.86			
SWPW-2	9/15/06 20:05	456.79			
SWPW-2	9/15/06 20:10	456.70			
SWPW-2	9/15/06 20:15	456.67			
SWPW-2	9/15/06 20:20	456.59			
SWPW-2	9/15/06 20:25	456.53			
SWPW-2	9/15/06 20:30	456.47			
SWPW-2	9/15/06 20:35	456.42			
SWPW-2	9/15/06 20:40	456.37			
SWPW-2	9/15/06 20:45	456.34			
SWPW-2	9/15/06 20:50	456.29			
SWPW-2	9/15/06 20:55	456.22			
SWPW-2	9/15/06 21:00	456.17			
SWPW-2	9/15/06 21:05	456.11			
SWPW-2	9/15/06 21:10	456.03			
SWPW-2	9/15/06 21:15	456.00			
SWPW-2	9/15/06 21:20	455.95			
SWPW-2	9/15/06 21:25	455.90			
SWPW-2	9/15/06 21:30	455.85			
SWPW-2	9/15/06 21:35	455.80			
SWPW-2	9/15/06 21:40	455.75			
SWPW-2	9/15/06 21:45	455.70			
SWPW-2	9/15/06 21:50	455.66			
SWPW-2	9/15/06 21:55	455.60			
SWPW-2	9/15/06 22:00	455.56			
SWPW-2	9/15/06 22:05	455.51			
SWPW-2	9/15/06 22:10	455.46			
SWPW-2	9/15/06 22:15	455.45			
SWPW-2	9/15/06 22:20	455.36			
SWPW-2	9/15/06 22:25	455.35			
SWPW-2	9/15/06 22:30	455.27			
SWPW-2	9/15/06 22:35	455.23			
SWPW-2	9/15/06 22:40	455.22			
SWPW-2	9/15/06 22:45	455.14			
SWPW-2	9/15/06 22:50	455.13			
SWPW-2	9/15/06 22:55	455.04			
SWPW-2	9/15/06 23:00	455.03			
SWPW-2	9/15/06 23:05	454.98			
SWPW-2	9/15/06 23:10	454.93			
SWPW-2	9/15/06 23:15	454.89			
SWPW-2	9/15/06 23:20	454.85			
SWPW-2	9/15/06 23:25	454.80			
SWPW-2	9/15/06 23:30	454.75			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/15/06 23:35	454.71			
SWPW-2	9/15/06 23:40	454.67			
SWPW-2	9/15/06 23:45	454.66			
SWPW-2	9/15/06 23:50	454.58			
SWPW-2	9/15/06 23:55	454.55			
SWPW-2	9/16/06 0:00	454.50			
SWPW-2	9/16/06 0:05	454.48			
SWPW-2	9/16/06 0:10	454.44			
SWPW-2	9/16/06 0:15	454.41			
SWPW-2	9/16/06 0:20	454.36			
SWPW-2	9/16/06 0:25	454.29			
SWPW-2	9/16/06 0:30	454.24			
SWPW-2	9/16/06 0:35	454.24			
SWPW-2	9/16/06 0:40	454.19			
SWPW-2	9/16/06 0:45	454.15			
SWPW-2	9/16/06 0:50	454.14			
SWPW-2	9/16/06 0:55	454.07			
SWPW-2	9/16/06 1:00	454.04			
SWPW-2	9/16/06 1:05	454.01			
SWPW-2	9/16/06 1:10	453.96			
SWPW-2	9/16/06 1:15	453.93			
SWPW-2	9/16/06 1:20	453.92			
SWPW-2	9/16/06 1:25	453.87			
SWPW-2	9/16/06 1:30	453.84			
SWPW-2	9/16/06 1:35	453.77			
SWPW-2	9/16/06 1:40	453.76			
SWPW-2	9/16/06 1:45	453.72			
SWPW-2	9/16/06 1:50	453.68			
SWPW-2	9/16/06 1:55	453.64			
SWPW-2	9/16/06 2:00	453.61			
SWPW-2	9/16/06 2:05	453.58			
SWPW-2	9/16/06 2:10	453.54			
SWPW-2	9/16/06 2:15	453.51			
SWPW-2	9/16/06 2:20	453.46			
SWPW-2	9/16/06 2:25	453.43			
SWPW-2	9/16/06 2:30	453.40			
SWPW-2	9/16/06 2:35	453.37			
SWPW-2	9/16/06 2:40	453.34			
SWPW-2	9/16/06 2:45	453.30			
SWPW-2	9/16/06 2:50	453.28			
SWPW-2	9/16/06 2:55	453.24			
SWPW-2	9/16/06 3:00	453.21			
SWPW-2	9/16/06 3:05	453.17			
SWPW-2	9/16/06 3:10	453.14			
SWPW-2	9/16/06 3:15	453.13			
SWPW-2	9/16/06 3:20	453.07			
SWPW-2	9/16/06 3:25	453.05			
SWPW-2	9/16/06 3:30	452.98			
SWPW-2	9/16/06 3:35	453.00			
SWPW-2	9/16/06 3:40	452.96			
SWPW-2	9/16/06 3:45	452.94			
SWPW-2	9/16/06 3:50	452.91			
SWPW-2	9/16/06 3:55	452.83			
SWPW-2	9/16/06 4:00	452.86			
SWPW-2	9/16/06 4:05	452.80			
SWPW-2	9/16/06 4:10	452.76			
SWPW-2	9/16/06 4:15	452.75			
SWPW-2	9/16/06 4:20	452.68			
SWPW-2	9/16/06 4:25	452.68			
SWPW-2	9/16/06 4:30	452.65			
SWPW-2	9/16/06 4:35	452.62			
SWPW-2	9/16/06 4:40	452.59			
SWPW-2	9/16/06 4:45	452.55			
SWPW-2	9/16/06 4:50	452.52			
SWPW-2	9/16/06 4:55	452.50			
SWPW-2	9/16/06 5:00	452.47			
SWPW-2	9/16/06 5:05	452.45			
SWPW-2	9/16/06 5:10	452.42			
SWPW-2	9/16/06 5:15	452.39			
SWPW-2	9/16/06 5:20	452.36			
SWPW-2	9/16/06 5:25	452.31			
SWPW-2	9/16/06 5:30	452.31			
SWPW-2	9/16/06 5:35	452.28			
SWPW-2	9/16/06 5:40	452.26			
SWPW-2	9/16/06 5:45	452.23			
SWPW-2	9/16/06 5:50	452.19			
SWPW-2	9/16/06 5:55	452.13			
SWPW-2	9/16/06 6:00	452.15			
SWPW-2	9/16/06 6:05	452.09			
SWPW-2	9/16/06 6:10	452.09			
SWPW-2	9/16/06 6:15	452.03			
SWPW-2	9/16/06 6:20	452.03			
SWPW-2	9/16/06 6:25	452.01			
SWPW-2	9/16/06 6:30	451.99			
SWPW-2	9/16/06 6:35	451.97			
SWPW-2	9/16/06 6:40	451.93			
SWPW-2	9/16/06 6:45	451.91			
SWPW-2	9/16/06 6:50	451.88			
SWPW-2	9/16/06 6:55	451.85			
SWPW-2	9/16/06 7:00	451.83			
SWPW-2	9/16/06 7:05	451.79			
SWPW-2	9/16/06 7:10	451.78			
SWPW-2	9/16/06 7:15	451.74			
SWPW-2	9/16/06 7:20	451.74			
SWPW-2	9/16/06 7:25	451.68			
SWPW-2	9/16/06 7:30	451.69			
SWPW-2	9/16/06 7:35	451.67			
SWPW-2	9/16/06 7:40	451.63			
SWPW-2	9/16/06 7:45	451.57			
SWPW-2	9/16/06 7:50	451.57			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/16/06 7:55	451.53			
SWPW-2	9/16/06 8:00	451.54			
SWPW-2	9/16/06 8:05	451.52			
SWPW-2	9/16/06 8:10	451.45			
SWPW-2	9/16/06 8:15	451.46			
SWPW-2	9/16/06 8:20	451.44			
SWPW-2	9/16/06 8:25	451.42			
SWPW-2	9/16/06 8:30	451.38			
SWPW-2	9/16/06 8:35	451.37			
SWPW-2	9/16/06 8:40	451.33			
SWPW-2	9/16/06 8:45	451.30			
SWPW-2	9/16/06 8:50	451.28			
SWPW-2	9/16/06 8:55	451.25			
SWPW-2	9/16/06 9:00	451.23			
SWPW-2	9/16/06 9:05	451.21			
SWPW-2	9/16/06 9:10	451.19			
SWPW-2	9/16/06 9:15	451.17			
SWPW-2	9/16/06 9:20	451.14			
SWPW-2	9/16/06 9:25	451.12			
SWPW-2	9/16/06 9:30	451.11			
SWPW-2	9/16/06 9:35	451.07			
SWPW-2	9/16/06 9:40	451.05			
SWPW-2	9/16/06 9:45	451.02			
SWPW-2	9/16/06 9:50	451.00			
SWPW-2	9/16/06 9:55	450.97			
SWPW-2	9/16/06 10:00	450.95			
SWPW-2	9/16/06 10:05	450.93			
SWPW-2	9/16/06 10:10	450.91			
SWPW-2	9/16/06 10:15	450.92			
SWPW-2	9/16/06 10:20	450.86			
SWPW-2	9/16/06 10:25	450.88			
SWPW-2	9/16/06 10:30	450.81			
SWPW-2	9/16/06 10:35	450.78			
SWPW-2	9/16/06 10:40	450.78			
SWPW-2	9/16/06 10:45	450.75			
SWPW-2	9/16/06 10:50	450.72			
SWPW-2	9/16/06 10:55	450.74			
SWPW-2	9/16/06 11:00	450.69			
SWPW-2	9/16/06 11:05	450.67			
SWPW-2	9/16/06 11:10	450.67			
SWPW-2	9/16/06 11:15	450.66			
SWPW-2	9/16/06 11:20	450.63			
SWPW-2	9/16/06 11:25	450.57			
SWPW-2	9/16/06 11:30	450.55			
SWPW-2	9/16/06 11:35	450.52			
SWPW-2	9/16/06 11:40	450.54			
SWPW-2	9/16/06 11:45	450.49			
SWPW-2	9/16/06 11:50	450.47			
SWPW-2	9/16/06 11:55	450.45			
SWPW-2	9/16/06 12:00	450.42			
SWPW-2	9/16/06 12:05	450.41			
SWPW-2	9/16/06 12:10	450.38			
SWPW-2	9/16/06 12:15	450.40			
SWPW-2	9/16/06 12:20	450.34			
SWPW-2	9/16/06 12:25	450.36			
SWPW-2	9/16/06 12:30	450.34			
SWPW-2	9/16/06 12:35	450.31			
SWPW-2	9/16/06 12:40	450.28			
SWPW-2	9/16/06 12:45	450.25			
SWPW-2	9/16/06 12:50	450.25			
SWPW-2	9/16/06 12:55	450.21			
SWPW-2	9/16/06 13:00	450.20			
SWPW-2	9/16/06 13:05	450.18			
SWPW-2	9/16/06 13:10	450.16			
SWPW-2	9/16/06 13:15	450.13			
SWPW-2	9/16/06 13:20	450.12			
SWPW-2	9/16/06 13:25	450.10			
SWPW-2	9/16/06 13:30	450.08			
SWPW-2	9/16/06 13:35	450.05			
SWPW-2	9/16/06 13:40	450.00			
SWPW-2	9/16/06 13:45	450.01			
SWPW-2	9/16/06 13:50	449.99			
SWPW-2	9/16/06 13:55	449.98			
SWPW-2	9/16/06 14:00	449.95			
SWPW-2	9/16/06 14:05	449.93			
SWPW-2	9/16/06 14:10	449.91			
SWPW-2	9/16/06 14:15	449.89			
SWPW-2	9/16/06 14:20	449.88			
SWPW-2	9/16/06 14:25	449.86			
SWPW-2	9/16/06 14:30	449.81			
SWPW-2	9/16/06 14:35	449.82			
SWPW-2	9/16/06 14:40	449.81			
SWPW-2	9/16/06 14:45	449.80			
SWPW-2	9/16/06 14:50	449.77			
SWPW-2	9/16/06 14:55	449.75			
SWPW-2	9/16/06 15:00	449.74			
SWPW-2	9/16/06 15:05	449.72			
SWPW-2	9/16/06 15:10	449.71			
SWPW-2	9/16/06 15:15	449.67			
SWPW-2	9/16/06 15:20	449.66			
SWPW-2	9/16/06 15:25	449.63			
SWPW-2	9/16/06 15:30	449.62			
SWPW-2	9/16/06 15:35	449.59			
SWPW-2	9/16/06 15:40	449.58			
SWPW-2	9/16/06 15:45	449.57			
SWPW-2	9/16/06 15:50	449.55			
SWPW-2	9/16/06 15:55	449.53			
SWPW-2	9/16/06 16:00	449.50			
SWPW-2	9/16/06 16:05	449.48			
SWPW-2	9/16/06 16:10	449.47			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/16/06 16:15	449.45			
SWPW-2	9/16/06 16:20	449.44			
SWPW-2	9/16/06 16:25	449.42			
SWPW-2	9/16/06 16:30	449.40			
SWPW-2	9/16/06 16:35	449.37			
SWPW-2	9/16/06 16:40	449.36			
SWPW-2	9/16/06 16:45	449.34			
SWPW-2	9/16/06 16:50	449.32			
SWPW-2	9/16/06 16:55	449.29			
SWPW-2	9/16/06 17:00	449.30			
SWPW-2	9/16/06 17:05	449.28			
SWPW-2	9/16/06 17:10	449.26			
SWPW-2	9/16/06 17:15	449.25			
SWPW-2	9/16/06 17:20	449.22			
SWPW-2	9/16/06 17:25	449.21			
SWPW-2	9/16/06 17:30	449.20			
SWPW-2	9/16/06 17:35	449.18			
SWPW-2	9/16/06 17:40	449.17			
SWPW-2	9/16/06 17:45	449.19			
SWPW-2	9/16/06 17:50	449.14			
SWPW-2	9/16/06 17:55	449.12			
SWPW-2	9/16/06 18:00	449.11			
SWPW-2	9/16/06 18:05	449.10			
SWPW-2	9/16/06 18:10	449.08			
SWPW-2	9/16/06 18:15	449.06			
SWPW-2	9/16/06 18:20	449.03			
SWPW-2	9/16/06 18:25	449.00			
SWPW-2	9/16/06 18:30	449.00			
SWPW-2	9/16/06 18:35	448.99			
SWPW-2	9/16/06 18:40	448.98			
SWPW-2	9/16/06 18:45	448.93			
SWPW-2	9/16/06 18:50	448.94			
SWPW-2	9/16/06 18:55	448.92			
SWPW-2	9/16/06 19:00	448.91			
SWPW-2	9/16/06 19:05	448.90			
SWPW-2	9/16/06 19:10	448.89			
SWPW-2	9/16/06 19:15	448.87			
SWPW-2	9/16/06 19:20	448.86			
SWPW-2	9/16/06 19:25	448.84			
SWPW-2	9/16/06 19:30	448.78			
SWPW-2	9/16/06 19:35	448.80			
SWPW-2	9/16/06 19:40	448.78			
SWPW-2	9/16/06 19:45	448.77			
SWPW-2	9/16/06 19:50	448.74			
SWPW-2	9/16/06 19:55	448.73			
SWPW-2	9/16/06 20:00	448.70			
SWPW-2	9/16/06 20:05	448.72			
SWPW-2	9/16/06 20:10	448.67			
SWPW-2	9/16/06 20:15	448.67			
SWPW-2	9/16/06 20:20	448.64			
SWPW-2	9/16/06 20:25	448.63			
SWPW-2	9/16/06 20:30	448.62			
SWPW-2	9/16/06 20:35	448.62			
SWPW-2	9/16/06 20:40	448.57			
SWPW-2	9/16/06 20:45	448.58			
SWPW-2	9/16/06 20:50	448.55			
SWPW-2	9/16/06 20:55	448.52			
SWPW-2	9/16/06 21:00	448.56			
SWPW-2	9/16/06 21:05	448.54			
SWPW-2	9/16/06 21:10	448.49			
SWPW-2	9/16/06 21:15	448.50			
SWPW-2	9/16/06 21:20	448.48			
SWPW-2	9/16/06 21:25	448.44			
SWPW-2	9/16/06 21:30	448.46			
SWPW-2	9/16/06 21:35	448.44			
SWPW-2	9/16/06 21:40	448.42			
SWPW-2	9/16/06 21:45	448.38			
SWPW-2	9/16/06 21:50	448.39			
SWPW-2	9/16/06 21:55	448.38			
SWPW-2	9/16/06 22:00	448.38			
SWPW-2	9/16/06 22:05	448.36			
SWPW-2	9/16/06 22:10	448.36			
SWPW-2	9/16/06 22:15	448.30			
SWPW-2	9/16/06 22:20	448.31			
SWPW-2	9/16/06 22:25	448.29			
SWPW-2	9/16/06 22:30	448.28			
SWPW-2	9/16/06 22:35	448.25			
SWPW-2	9/16/06 22:40	448.24			
SWPW-2	9/16/06 22:45	448.22			
SWPW-2	9/16/06 22:50	448.24			
SWPW-2	9/16/06 22:55	448.18			
SWPW-2	9/16/06 23:00	448.20			
SWPW-2	9/16/06 23:05	448.15			
SWPW-2	9/16/06 23:10	448.15			
SWPW-2	9/16/06 23:15	448.12			
SWPW-2	9/16/06 23:20	448.12			
SWPW-2	9/16/06 23:25	448.10			
SWPW-2	9/16/06 23:30	448.09			
SWPW-2	9/16/06 23:35	448.07			
SWPW-2	9/16/06 23:40	448.05			
SWPW-2	9/16/06 23:45	448.04			
SWPW-2	9/16/06 23:50	448.03			
SWPW-2	9/16/06 23:55	448.00			
SWPW-2	9/17/06 0:00	447.99			
SWPW-2	9/17/06 0:05	447.98			
SWPW-2	9/17/06 0:10	447.97			
SWPW-2	9/17/06 0:15	447.94			
SWPW-2	9/17/06 0:20	447.93			
SWPW-2	9/17/06 0:25	447.92			
SWPW-2	9/17/06 0:30	447.95			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/17/06 0:35	447.90			
SWPW-2	9/17/06 0:40	447.89			
SWPW-2	9/17/06 0:45	447.87			
SWPW-2	9/17/06 0:50	447.85			
SWPW-2	9/17/06 0:55	447.85			
SWPW-2	9/17/06 1:00	447.83			
SWPW-2	9/17/06 1:05	447.82			
SWPW-2	9/17/06 1:10	447.79			
SWPW-2	9/17/06 1:15	447.79			
SWPW-2	9/17/06 1:20	447.79			
SWPW-2	9/17/06 1:25	447.76			
SWPW-2	9/17/06 1:30	447.75			
SWPW-2	9/17/06 1:35	447.74			
SWPW-2	9/17/06 1:40	447.72			
SWPW-2	9/17/06 1:45	447.72			
SWPW-2	9/17/06 1:50	447.70			
SWPW-2	9/17/06 1:55	447.69			
SWPW-2	9/17/06 2:00	447.68			
SWPW-2	9/17/06 2:05	447.66			
SWPW-2	9/17/06 2:10	447.64			
SWPW-2	9/17/06 2:15	447.63			
SWPW-2	9/17/06 2:20	447.62			
SWPW-2	9/17/06 2:25	447.60			
SWPW-2	9/17/06 2:30	447.58			
SWPW-2	9/17/06 2:35	447.56			
SWPW-2	9/17/06 2:40	447.55			
SWPW-2	9/17/06 2:45	447.54			
SWPW-2	9/17/06 2:50	447.52			
SWPW-2	9/17/06 2:55	447.51			
SWPW-2	9/17/06 3:00	447.50			
SWPW-2	9/17/06 3:05	447.49			
SWPW-2	9/17/06 3:10	447.46			
SWPW-2	9/17/06 3:15	447.46			
SWPW-2	9/17/06 3:20	447.47			
SWPW-2	9/17/06 3:25	447.43			
SWPW-2	9/17/06 3:30	447.44			
SWPW-2	9/17/06 3:35	447.39			
SWPW-2	9/17/06 3:40	447.38			
SWPW-2	9/17/06 3:45	447.40			
SWPW-2	9/17/06 3:50	447.36			
SWPW-2	9/17/06 3:55	447.38			
SWPW-2	9/17/06 4:00	447.34			
SWPW-2	9/17/06 4:05	447.35			
SWPW-2	9/17/06 4:10	447.31			
SWPW-2	9/17/06 4:15	447.33			
SWPW-2	9/17/06 4:20	447.28			
SWPW-2	9/17/06 4:25	447.31			
SWPW-2	9/17/06 4:30	447.30			
SWPW-2	9/17/06 4:35	447.25			
SWPW-2	9/17/06 4:40	447.27			
SWPW-2	9/17/06 4:45	447.23			
SWPW-2	9/17/06 4:50	447.25			
SWPW-2	9/17/06 4:55	447.21			
SWPW-2	9/17/06 5:00	447.20			
SWPW-2	9/17/06 5:05	447.18			
SWPW-2	9/17/06 5:10	447.16			
SWPW-2	9/17/06 5:15	447.16			
SWPW-2	9/17/06 5:20	447.14			
SWPW-2	9/17/06 5:25	447.13			
SWPW-2	9/17/06 5:30	447.12			
SWPW-2	9/17/06 5:35	447.10			
SWPW-2	9/17/06 5:40	447.09			
SWPW-2	9/17/06 5:45	447.08			
SWPW-2	9/17/06 5:50	447.07			
SWPW-2	9/17/06 5:55	447.05			
SWPW-2	9/17/06 6:00	447.04			
SWPW-2	9/17/06 6:05	447.06			
SWPW-2	9/17/06 6:10	447.02			
SWPW-2	9/17/06 6:15	447.01			
SWPW-2	9/17/06 6:20	446.99			
SWPW-2	9/17/06 6:25	446.99			
SWPW-2	9/17/06 6:30	446.97			
SWPW-2	9/17/06 6:35	446.96			
SWPW-2	9/17/06 6:40	446.95			
SWPW-2	9/17/06 6:45	446.97			
SWPW-2	9/17/06 6:50	446.93			
SWPW-2	9/17/06 6:55	446.91			
SWPW-2	9/17/06 7:00	446.95			
SWPW-2	9/17/06 7:05	446.89			
SWPW-2	9/17/06 7:10	446.88			
SWPW-2	9/17/06 7:15	446.87			
SWPW-2	9/17/06 7:20	446.89			
SWPW-2	9/17/06 7:25	446.88			
SWPW-2	9/17/06 7:30	446.87			
SWPW-2	9/17/06 7:35	446.83			
SWPW-2	9/17/06 7:40	446.81			
SWPW-2	9/17/06 7:45	446.84			
SWPW-2	9/17/06 7:50	446.80			
SWPW-2	9/17/06 7:55	446.79			
SWPW-2	9/17/06 8:00	446.77			
SWPW-2	9/17/06 8:05	446.77			
SWPW-2	9/17/06 8:10	446.76			
SWPW-2	9/17/06 8:15	446.74			
SWPW-2	9/17/06 8:20	446.72			
SWPW-2	9/17/06 8:25	446.73			
SWPW-2	9/17/06 8:30	446.71			
SWPW-2	9/17/06 8:35	446.73			
SWPW-2	9/17/06 8:40	446.73			
SWPW-2	9/17/06 8:45	446.71			
SWPW-2	9/17/06 8:50	446.67			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/17/06 8:55	446.69			
SWPW-2	9/17/06 9:00	446.64			
SWPW-2	9/17/06 9:05	446.63			
SWPW-2	9/17/06 9:10	446.61			
SWPW-2	9/17/06 9:15	446.64			
SWPW-2	9/17/06 9:20	446.58			
SWPW-2	9/17/06 9:25	446.58			
SWPW-2	9/17/06 9:30	446.57			
SWPW-2	9/17/06 9:35	446.57			
SWPW-2	9/17/06 9:40	446.55			
SWPW-2	9/17/06 9:45	446.53			
SWPW-2	9/17/06 9:50	446.53			
SWPW-2	9/17/06 9:55	446.52			
SWPW-2	9/17/06 10:00	446.51			
SWPW-2	9/17/06 10:05	446.49			
SWPW-2	9/17/06 10:10	446.48			
SWPW-2	9/17/06 10:15	446.49			
SWPW-2	9/17/06 10:20	446.45			
SWPW-2	9/17/06 10:25	446.47			
SWPW-2	9/17/06 10:30	446.45			
SWPW-2	9/17/06 10:35	446.45			
SWPW-2	9/17/06 10:40	446.42			
SWPW-2	9/17/06 10:45	446.42			
SWPW-2	9/17/06 10:50	446.41			
SWPW-2	9/17/06 10:55	446.40			
SWPW-2	9/17/06 11:00	446.40			
SWPW-2	9/17/06 11:05	446.37			
SWPW-2	9/17/06 11:10	446.35			
SWPW-2	9/17/06 11:15	446.35			
SWPW-2	9/17/06 11:20	446.34			
SWPW-2	9/17/06 11:25	446.33			
SWPW-2	9/17/06 11:30	446.33			
SWPW-2	9/17/06 11:35	446.31			
SWPW-2	9/17/06 11:40	446.30			
SWPW-2	9/17/06 11:45	446.28			
SWPW-2	9/17/06 11:50	446.26			
SWPW-2	9/17/06 11:55	446.27			
SWPW-2	9/17/06 12:00	446.26			
SWPW-2	9/17/06 12:05	446.24			
SWPW-2	9/17/06 12:10	446.23			
SWPW-2	9/17/06 12:15	446.21			
SWPW-2	9/17/06 12:20	446.20			
SWPW-2	9/17/06 12:25	446.19			
SWPW-2	9/17/06 12:30	446.15			
SWPW-2	9/17/06 12:35	446.18			
SWPW-2	9/17/06 12:40	446.17			
SWPW-2	9/17/06 12:45	446.15			
SWPW-2	9/17/06 12:50	446.14			
SWPW-2	9/17/06 12:55	446.13			
SWPW-2	9/17/06 13:00	446.12			
SWPW-2	9/17/06 13:05	446.12			
SWPW-2	9/17/06 13:10	446.07			
SWPW-2	9/17/06 13:15	446.06			
SWPW-2	9/17/06 13:20	446.05			
SWPW-2	9/17/06 13:25	446.07			
SWPW-2	9/17/06 13:30	446.06			
SWPW-2	9/17/06 13:35	446.05			
SWPW-2	9/17/06 13:40	446.04			
SWPW-2	9/17/06 13:45	446.03			
SWPW-2	9/17/06 13:50	446.01			
SWPW-2	9/17/06 13:55	446.01			
SWPW-2	9/17/06 14:00	445.96			
SWPW-2	9/17/06 14:05	445.98			
SWPW-2	9/17/06 14:10	445.94			
SWPW-2	9/17/06 14:15	445.95			
SWPW-2	9/17/06 14:20	445.94			
SWPW-2	9/17/06 14:25	445.94			
SWPW-2	9/17/06 14:30	445.94			
SWPW-2	9/17/06 14:35	445.88			
SWPW-2	9/17/06 14:40	445.91			
SWPW-2	9/17/06 14:45	445.90			
SWPW-2	9/17/06 14:50	445.88			
SWPW-2	9/17/06 14:55	445.84			
SWPW-2	9/17/06 15:00	445.83			
SWPW-2	9/17/06 15:05	445.85			
SWPW-2	9/17/06 15:10	445.85			
SWPW-2	9/17/06 15:15	445.82			
SWPW-2	9/17/06 15:20	445.82			
SWPW-2	9/17/06 15:25	445.77			
SWPW-2	9/17/06 15:30	445.80			
SWPW-2	9/17/06 15:35	445.79			
SWPW-2	9/17/06 15:40	445.79			
SWPW-2	9/17/06 15:45	445.76			
SWPW-2	9/17/06 15:50	445.75			
SWPW-2	9/17/06 15:55	445.74			
SWPW-2	9/17/06 16:00	445.73			
SWPW-2	9/17/06 16:05	445.69			
SWPW-2	9/17/06 16:10	445.70			
SWPW-2	9/17/06 16:15	445.70			
SWPW-2	9/17/06 16:20	445.69			
SWPW-2	9/17/06 16:25	445.66			
SWPW-2	9/17/06 16:30	445.64			
SWPW-2	9/17/06 16:35	445.67			
SWPW-2	9/17/06 16:40	445.66			
SWPW-2	9/17/06 16:45	445.64			
SWPW-2	9/17/06 16:50	445.64			
SWPW-2	9/17/06 16:55	445.59			
SWPW-2	9/17/06 17:00	445.59			
SWPW-2	9/17/06 17:05	445.59			
SWPW-2	9/17/06 17:10	445.58			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/17/06 17:15	445.58			
SWPW-2	9/17/06 17:20	445.56			
SWPW-2	9/17/06 17:25	445.56			
SWPW-2	9/17/06 17:30	445.54			
SWPW-2	9/17/06 17:35	445.52			
SWPW-2	9/17/06 17:40	445.52			
SWPW-2	9/17/06 17:45	445.51			
SWPW-2	9/17/06 17:50	445.52			
SWPW-2	9/17/06 17:55	445.52			
SWPW-2	9/17/06 18:00	445.52			
SWPW-2	9/17/06 18:05	445.51			
SWPW-2	9/17/06 18:10	445.50			
SWPW-2	9/17/06 18:15	445.48			
SWPW-2	9/17/06 18:20	445.44			
SWPW-2	9/17/06 18:25	445.46			
SWPW-2	9/17/06 18:30	445.46			
SWPW-2	9/17/06 18:35	445.45			
SWPW-2	9/17/06 18:40	445.40			
SWPW-2	9/17/06 18:45	445.40			
SWPW-2	9/17/06 18:50	445.42			
SWPW-2	9/17/06 18:55	445.41			
SWPW-2	9/17/06 19:00	445.41			
SWPW-2	9/17/06 19:05	445.40			
SWPW-2	9/17/06 19:10	445.37			
SWPW-2	9/17/06 19:15	445.37			
SWPW-2	9/17/06 19:20	445.38			
SWPW-2	9/17/06 19:25	445.36			
SWPW-2	9/17/06 19:30	445.34			
SWPW-2	9/17/06 19:35	445.35			
SWPW-2	9/17/06 19:40	445.32			
SWPW-2	9/17/06 19:45	445.31			
SWPW-2	9/17/06 19:50	445.30			
SWPW-2	9/17/06 19:55	445.30			
SWPW-2	9/17/06 20:00	445.29			
SWPW-2	9/17/06 20:05	445.27			
SWPW-2	9/17/06 20:10	445.28			
SWPW-2	9/17/06 20:15	445.26			
SWPW-2	9/17/06 20:20	445.25			
SWPW-2	9/17/06 20:25	445.23			
SWPW-2	9/17/06 20:30	445.23			
SWPW-2	9/17/06 20:35	445.22			
SWPW-2	9/17/06 20:40	445.22			
SWPW-2	9/17/06 20:45	445.21			
SWPW-2	9/17/06 20:50	445.21			
SWPW-2	9/17/06 20:55	445.20			
SWPW-2	9/17/06 21:00	445.19			
SWPW-2	9/17/06 21:05	445.18			
SWPW-2	9/17/06 21:10	445.14			
SWPW-2	9/17/06 21:15	445.16			
SWPW-2	9/17/06 21:20	445.17			
SWPW-2	9/17/06 21:25	445.15			
SWPW-2	9/17/06 21:30	445.14			
SWPW-2	9/17/06 21:35	445.12			
SWPW-2	9/17/06 21:40	445.12			
SWPW-2	9/17/06 21:45	445.11			
SWPW-2	9/17/06 21:50	445.11			
SWPW-2	9/17/06 21:55	445.10			
SWPW-2	9/17/06 22:00	445.09			
SWPW-2	9/17/06 22:05	445.08			
SWPW-2	9/17/06 22:10	445.07			
SWPW-2	9/17/06 22:15	445.07			
SWPW-2	9/17/06 22:20	445.05			
SWPW-2	9/17/06 22:25	445.06			
SWPW-2	9/17/06 22:30	445.03			
SWPW-2	9/17/06 22:35	445.04			
SWPW-2	9/17/06 22:40	445.02			
SWPW-2	9/17/06 22:45	445.01			
SWPW-2	9/17/06 22:50	444.99			
SWPW-2	9/17/06 22:55	445.00			
SWPW-2	9/17/06 23:00	444.98			
SWPW-2	9/17/06 23:05	444.97			
SWPW-2	9/17/06 23:10	444.97			
SWPW-2	9/17/06 23:15	444.96			
SWPW-2	9/17/06 23:20	444.94			
SWPW-2	9/17/06 23:25	444.94			
SWPW-2	9/17/06 23:30	444.97			
SWPW-2	9/17/06 23:35	444.93			
SWPW-2	9/17/06 23:40	444.91			
SWPW-2	9/17/06 23:45	444.90			
SWPW-2	9/17/06 23:50	444.89			
SWPW-2	9/17/06 23:55	444.88			
SWPW-2	9/18/06 0:00	444.87			
SWPW-2	9/18/06 0:05	444.87			
SWPW-2	9/18/06 0:10	444.86			
SWPW-2	9/18/06 0:15	444.83			
SWPW-2	9/18/06 0:20	444.84			
SWPW-2	9/18/06 0:25	444.83			
SWPW-2	9/18/06 0:30	444.82			
SWPW-2	9/18/06 0:35	444.82			
SWPW-2	9/18/06 0:40	444.81			
SWPW-2	9/18/06 0:45	444.79			
SWPW-2	9/18/06 0:50	444.78			
SWPW-2	9/18/06 0:55	444.79			
SWPW-2	9/18/06 1:00	444.76			
SWPW-2	9/18/06 1:05	444.77			
SWPW-2	9/18/06 1:10	444.76			
SWPW-2	9/18/06 1:15	444.75			
SWPW-2	9/18/06 1:20	444.75			
SWPW-2	9/18/06 1:25	444.74			
SWPW-2	9/18/06 1:30	444.73			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/18/06 1:35	444.71			
SWPW-2	9/18/06 1:40	444.71			
SWPW-2	9/18/06 1:45	444.70			
SWPW-2	9/18/06 1:50	444.69			
SWPW-2	9/18/06 1:55	444.68			
SWPW-2	9/18/06 2:00	444.68			
SWPW-2	9/18/06 2:05	444.68			
SWPW-2	9/18/06 2:10	444.66			
SWPW-2	9/18/06 2:15	444.66			
SWPW-2	9/18/06 2:20	444.64			
SWPW-2	9/18/06 2:25	444.63			
SWPW-2	9/18/06 2:30	444.63			
SWPW-2	9/18/06 2:35	444.63			
SWPW-2	9/18/06 2:40	444.63			
SWPW-2	9/18/06 2:45	444.58			
SWPW-2	9/18/06 2:50	444.61			
SWPW-2	9/18/06 2:55	444.56			
SWPW-2	9/18/06 3:00	444.59			
SWPW-2	9/18/06 3:05	444.56			
SWPW-2	9/18/06 3:10	444.57			
SWPW-2	9/18/06 3:15	444.56			
SWPW-2	9/18/06 3:20	444.53			
SWPW-2	9/18/06 3:25	444.52			
SWPW-2	9/18/06 3:30	444.55			
SWPW-2	9/18/06 3:35	444.55			
SWPW-2	9/18/06 3:40	444.51			
SWPW-2	9/18/06 3:45	444.49			
SWPW-2	9/18/06 3:50	444.52			
SWPW-2	9/18/06 3:55	444.50			
SWPW-2	9/18/06 4:00	444.47			
SWPW-2	9/18/06 4:05	444.47			
SWPW-2	9/18/06 4:10	444.46			
SWPW-2	9/18/06 4:15	444.45			
SWPW-2	9/18/06 4:20	444.44			
SWPW-2	9/18/06 4:25	444.44			
SWPW-2	9/18/06 4:30	444.44			
SWPW-2	9/18/06 4:35	444.42			
SWPW-2	9/18/06 4:40	444.42			
SWPW-2	9/18/06 4:45	444.42			
SWPW-2	9/18/06 4:50	444.40			
SWPW-2	9/18/06 4:55	444.44			
SWPW-2	9/18/06 5:00	444.42			
SWPW-2	9/18/06 5:05	444.38			
SWPW-2	9/18/06 5:10	444.37			
SWPW-2	9/18/06 5:15	444.37			
SWPW-2	9/18/06 5:20	444.37			
SWPW-2	9/18/06 5:25	444.40			
SWPW-2	9/18/06 5:30	444.35			
SWPW-2	9/18/06 5:35	444.34			
SWPW-2	9/18/06 5:40	444.33			
SWPW-2	9/18/06 5:45	444.36			
SWPW-2	9/18/06 5:50	444.32			
SWPW-2	9/18/06 5:55	444.32			
SWPW-2	9/18/06 6:00	444.31			
SWPW-2	9/18/06 6:05	444.29			
SWPW-2	9/18/06 6:10	444.29			
SWPW-2	9/18/06 6:15	444.32			
SWPW-2	9/18/06 6:20	444.28			
SWPW-2	9/18/06 6:25	444.32			
SWPW-2	9/18/06 6:30	444.30			
SWPW-2	9/18/06 6:35	444.29			
SWPW-2	9/18/06 6:40	444.28			
SWPW-2	9/18/06 6:45	444.26			
SWPW-2	9/18/06 6:50	444.24			
SWPW-2	9/18/06 6:55	444.23			
SWPW-2	9/18/06 7:00	444.26			
SWPW-2	9/18/06 7:05	444.26			
SWPW-2	9/18/06 7:10	444.25			
SWPW-2	9/18/06 7:15	444.25			
SWPW-2	9/18/06 7:20	444.21			
SWPW-2	9/18/06 7:25	444.21			
SWPW-2	9/18/06 7:30	444.19			
SWPW-2	9/18/06 7:35	444.20			
SWPW-2	9/18/06 7:40	444.20			
SWPW-2	9/18/06 7:45	444.18			
SWPW-2	9/18/06 7:50	444.17			
SWPW-2	9/18/06 7:55	444.20			
SWPW-2	9/18/06 8:00	444.16			
SWPW-2	9/18/06 8:05	444.20			
SWPW-2	9/18/06 8:10	444.14			
SWPW-2	9/18/06 8:15	444.17			
SWPW-2	9/18/06 8:20	444.14			
SWPW-2	9/18/06 8:25	444.13			
SWPW-2	9/18/06 8:30	444.16			
SWPW-2	9/18/06 8:35	444.16			
SWPW-2	9/18/06 8:40	444.11			
SWPW-2	9/18/06 8:45	444.10			
SWPW-2	9/18/06 8:50	444.10			
SWPW-2	9/18/06 8:55	444.09			
SWPW-2	9/18/06 9:00	444.09			
SWPW-2	9/18/06 9:05	444.12			
SWPW-2	9/18/06 9:10	444.07			
SWPW-2	9/18/06 9:15	444.07			
SWPW-2	9/18/06 9:20	444.10			
SWPW-2	9/18/06 9:25	444.05			
SWPW-2	9/18/06 9:30	444.06			
SWPW-2	9/18/06 9:35	444.05			
SWPW-2	9/18/06 9:40	444.04			
SWPW-2	9/18/06 9:45	444.06			
SWPW-2	9/18/06 9:50	444.03			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/18/06 9:55	444.02			
SWPW-2	9/18/06 10:00	444.02			
SWPW-2	9/18/06 10:05	444.04			
SWPW-2	9/18/06 10:10	444.04			
SWPW-2	9/18/06 10:15	444.03			
SWPW-2	9/18/06 10:20	444.02			
SWPW-2	9/18/06 10:25	443.98			
SWPW-2	9/18/06 10:30	443.97			
SWPW-2	9/18/06 10:35	443.97			
SWPW-2	9/18/06 10:40	444.00			
SWPW-2	9/18/06 10:45	443.95			
SWPW-2	9/18/06 10:50	443.99			
SWPW-2	9/18/06 10:55	443.97			
SWPW-2	9/18/06 11:00	443.93			
SWPW-2	9/18/06 11:05	443.95			
SWPW-2	9/18/06 11:10	443.95			
SWPW-2	9/18/06 11:15	443.94			
SWPW-2	9/18/06 11:20	443.90			
SWPW-2	9/18/06 11:25	443.90			
SWPW-2	9/18/06 11:30	443.93			
SWPW-2	9/18/06 11:35	443.88			
SWPW-2	9/18/06 11:40	443.90			
SWPW-2	9/18/06 11:45	443.90			
SWPW-2	9/18/06 11:50	443.89			
SWPW-2	9/18/06 11:55	443.88			
SWPW-2	9/18/06 12:00	443.87			
SWPW-2	9/18/06 12:05	443.86			
SWPW-2	9/18/06 12:10	443.86			
SWPW-2	9/18/06 12:15	443.85			
SWPW-2	9/18/06 12:20	443.84			
SWPW-2	9/18/06 12:25	443.83			
SWPW-2	9/18/06 12:30	443.80			
SWPW-2	9/18/06 12:35	443.79			
SWPW-2	9/18/06 12:40	443.83			
SWPW-2	9/18/06 12:45	443.79			
SWPW-2	9/18/06 12:50	443.80			
SWPW-2	9/18/06 12:55	443.80			
SWPW-2	9/18/06 13:00	443.79			
SWPW-2	9/18/06 13:05	443.79			
SWPW-2	9/18/06 13:10	443.79			
SWPW-2	9/18/06 13:15	443.77			
SWPW-2	9/18/06 13:20	443.77			
SWPW-2	9/18/06 13:25	443.75			
SWPW-2	9/18/06 13:30	443.74			
SWPW-2	9/18/06 13:35	443.70			
SWPW-2	9/18/06 13:40	443.73			
SWPW-2	9/18/06 13:45	443.71			
SWPW-2	9/18/06 13:50	443.68			
SWPW-2	9/18/06 13:55	443.71			
SWPW-2	9/18/06 14:00	443.69			
SWPW-2	9/18/06 14:05	443.66			
SWPW-2	9/18/06 14:10	443.68			
SWPW-2	9/18/06 14:15	443.67			
SWPW-2	9/18/06 14:20	443.63			
SWPW-2	9/18/06 14:25	443.65			
SWPW-2	9/18/06 14:30	443.65			
SWPW-2	9/18/06 14:35	443.59			
SWPW-2	9/18/06 14:40	443.61			
SWPW-2	9/18/06 14:45	443.64			
SWPW-2	9/18/06 14:50	443.61			
SWPW-2	9/18/06 14:55	443.60			
SWPW-2	9/18/06 15:00	443.57			
SWPW-2	9/18/06 15:05	443.58			
SWPW-2	9/18/06 15:10	443.55			
SWPW-2	9/18/06 15:15	443.58			
SWPW-2	9/18/06 15:20	443.57			
SWPW-2	9/18/06 15:25	443.52			
SWPW-2	9/18/06 15:30	443.54			
SWPW-2	9/18/06 15:35	443.54			
SWPW-2	9/18/06 15:40	443.50			
SWPW-2	9/18/06 15:45	443.50			
SWPW-2	9/18/06 15:50	443.52			
SWPW-2	9/18/06 15:55	443.51			
SWPW-2	9/18/06 16:00	443.47			
SWPW-2	9/18/06 16:05	443.49			
SWPW-2	9/18/06 16:10	443.50			
SWPW-2	9/18/06 16:15	443.49			
SWPW-2	9/18/06 16:20	443.44			
SWPW-2	9/18/06 16:25	443.43			
SWPW-2	9/18/06 16:30	443.46			
SWPW-2	9/18/06 16:35	443.46			
SWPW-2	9/18/06 16:40	443.44			
SWPW-2	9/18/06 16:45	443.44			
SWPW-2	9/18/06 16:50	443.44			
SWPW-2	9/18/06 16:55	443.42			
SWPW-2	9/18/06 17:00	443.42			
SWPW-2	9/18/06 17:05	443.42			
SWPW-2	9/18/06 17:10	443.41			
SWPW-2	9/18/06 17:15	443.36			
SWPW-2	9/18/06 17:20	443.39			
SWPW-2	9/18/06 17:25	443.35			
SWPW-2	9/18/06 17:30	443.37			
SWPW-2	9/18/06 17:35	443.34			
SWPW-2	9/18/06 17:40	443.33			
SWPW-2	9/18/06 17:45	443.33			
SWPW-2	9/18/06 17:50	443.31			
SWPW-2	9/18/06 17:55	443.31			
SWPW-2	9/18/06 18:00	443.34			
SWPW-2	9/18/06 18:05	443.35			
SWPW-2	9/18/06 18:10	443.33			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/18/06 18:15	443.32			
SWPW-2	9/18/06 18:20	443.31			
SWPW-2	9/18/06 18:25	443.31			
SWPW-2	9/18/06 18:30	443.27			
SWPW-2	9/18/06 18:35	443.29			
SWPW-2	9/18/06 18:40	443.29			
SWPW-2	9/18/06 18:45	443.28			
SWPW-2	9/18/06 18:50	443.25			
SWPW-2	9/18/06 18:55	443.28			
SWPW-2	9/18/06 19:00	443.26			
SWPW-2	9/18/06 19:05	443.26			
SWPW-2	9/18/06 19:10	443.25			
SWPW-2	9/18/06 19:15	443.25			
SWPW-2	9/18/06 19:20	443.24			
SWPW-2	9/18/06 19:25	443.20			
SWPW-2	9/18/06 19:30	443.23			
SWPW-2	9/18/06 19:35	443.23			
SWPW-2	9/18/06 19:40	443.23			
SWPW-2	9/18/06 19:45	443.21			
SWPW-2	9/18/06 19:50	443.18			
SWPW-2	9/18/06 19:55	443.21			
SWPW-2	9/18/06 20:00	443.20			
SWPW-2	9/18/06 20:05	443.17			
SWPW-2	9/18/06 20:10	443.16			
SWPW-2	9/18/06 20:15	443.19			
SWPW-2	9/18/06 20:20	443.18			
SWPW-2	9/18/06 20:25	443.17			
SWPW-2	9/18/06 20:30	443.14			
SWPW-2	9/18/06 20:35	443.17			
SWPW-2	9/18/06 20:40	443.13			
SWPW-2	9/18/06 20:45	443.16			
SWPW-2	9/18/06 20:50	443.15			
SWPW-2	9/18/06 20:55	443.10			
SWPW-2	9/18/06 21:00	443.10			
SWPW-2	9/18/06 21:05	443.12			
SWPW-2	9/18/06 21:10	443.13			
SWPW-2	9/18/06 21:15	443.12			
SWPW-2	9/18/06 21:20	443.13			
SWPW-2	9/18/06 21:25	443.07			
SWPW-2	9/18/06 21:30	443.11			
SWPW-2	9/18/06 21:35	443.10			
SWPW-2	9/18/06 21:40	443.06			
SWPW-2	9/18/06 21:45	443.09			
SWPW-2	9/18/06 21:50	443.05			
SWPW-2	9/18/06 21:55	443.07			
SWPW-2	9/18/06 22:00	443.07			
SWPW-2	9/18/06 22:05	443.07			
SWPW-2	9/18/06 22:10	443.03			
SWPW-2	9/18/06 22:15	443.07			
SWPW-2	9/18/06 22:20	443.05			
SWPW-2	9/18/06 22:25	443.05			
SWPW-2	9/18/06 22:30	443.01			
SWPW-2	9/18/06 22:35	443.04			
SWPW-2	9/18/06 22:40	443.03			
SWPW-2	9/18/06 22:45	443.02			
SWPW-2	9/18/06 22:50	443.00			
SWPW-2	9/18/06 22:55	443.01			
SWPW-2	9/18/06 23:00	443.01			
SWPW-2	9/18/06 23:05	443.00			
SWPW-2	9/18/06 23:10	442.99			
SWPW-2	9/18/06 23:15	442.98			
SWPW-2	9/18/06 23:20	442.98			
SWPW-2	9/18/06 23:25	442.96			
SWPW-2	9/18/06 23:30	442.98			
SWPW-2	9/18/06 23:35	442.96			
SWPW-2	9/18/06 23:40	442.93			
SWPW-2	9/18/06 23:45	442.92			
SWPW-2	9/18/06 23:50	442.94			
SWPW-2	9/18/06 23:55	442.93			
SWPW-2	9/19/06 0:00	442.93			
SWPW-2	9/19/06 0:05	442.93			
SWPW-2	9/19/06 0:10	442.91			
SWPW-2	9/19/06 0:15	442.91			
SWPW-2	9/19/06 0:20	442.90			
SWPW-2	9/19/06 0:25	442.90			
SWPW-2	9/19/06 0:30	442.90			
SWPW-2	9/19/06 0:35	442.89			
SWPW-2	9/19/06 0:40	442.88			
SWPW-2	9/19/06 0:45	442.84			
SWPW-2	9/19/06 0:50	442.87			
SWPW-2	9/19/06 0:55	442.87			
SWPW-2	9/19/06 1:00	442.86			
SWPW-2	9/19/06 1:05	442.85			
SWPW-2	9/19/06 1:10	442.81			
SWPW-2	9/19/06 1:15	442.84			
SWPW-2	9/19/06 1:20	442.83			
SWPW-2	9/19/06 1:25	442.83			
SWPW-2	9/19/06 1:30	442.82			
SWPW-2	9/19/06 1:35	442.81			
SWPW-2	9/19/06 1:40	442.81			
SWPW-2	9/19/06 1:45	442.80			
SWPW-2	9/19/06 1:50	442.79			
SWPW-2	9/19/06 1:55	442.78			
SWPW-2	9/19/06 2:00	442.77			
SWPW-2	9/19/06 2:05	442.78			
SWPW-2	9/19/06 2:10	442.77			
SWPW-2	9/19/06 2:15	442.76			
SWPW-2	9/19/06 2:20	442.75			
SWPW-2	9/19/06 2:25	442.75			
SWPW-2	9/19/06 2:30	442.75			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/19/06 2:35	442.73			
SWPW-2	9/19/06 2:40	442.73			
SWPW-2	9/19/06 2:45	442.69			
SWPW-2	9/19/06 2:50	442.72			
SWPW-2	9/19/06 2:55	442.70			
SWPW-2	9/19/06 3:00	442.70			
SWPW-2	9/19/06 3:05	442.69			
SWPW-2	9/19/06 3:10	442.69			
SWPW-2	9/19/06 3:15	442.68			
SWPW-2	9/19/06 3:20	442.67			
SWPW-2	9/19/06 3:25	442.66			
SWPW-2	9/19/06 3:30	442.63			
SWPW-2	9/19/06 3:35	442.62			
SWPW-2	9/19/06 3:40	442.65			
SWPW-2	9/19/06 3:45	442.64			
SWPW-2	9/19/06 3:50	442.64			
SWPW-2	9/19/06 3:55	442.63			
SWPW-2	9/19/06 4:00	442.62			
SWPW-2	9/19/06 4:05	442.62			
SWPW-2	9/19/06 4:10	442.63			
SWPW-2	9/19/06 4:15	442.61			
SWPW-2	9/19/06 4:20	442.56			
SWPW-2	9/19/06 4:25	442.61			
SWPW-2	9/19/06 4:30	442.60			
SWPW-2	9/19/06 4:35	442.58			
SWPW-2	9/19/06 4:40	442.58			
SWPW-2	9/19/06 4:45	442.58			
SWPW-2	9/19/06 4:50	442.57			
SWPW-2	9/19/06 4:55	442.56			
SWPW-2	9/19/06 5:00	442.56			
SWPW-2	9/19/06 5:05	442.56			
SWPW-2	9/19/06 5:10	442.52			
SWPW-2	9/19/06 5:15	442.55			
SWPW-2	9/19/06 5:20	442.54			
SWPW-2	9/19/06 5:25	442.53			
SWPW-2	9/19/06 5:30	442.52			
SWPW-2	9/19/06 5:35	442.52			
SWPW-2	9/19/06 5:40	442.53			
SWPW-2	9/19/06 5:45	442.51			
SWPW-2	9/19/06 5:50	442.51			
SWPW-2	9/19/06 5:55	442.50			
SWPW-2	9/19/06 6:00	442.50			
SWPW-2	9/19/06 6:05	442.50			
SWPW-2	9/19/06 6:10	442.47			
SWPW-2	9/19/06 6:15	442.49			
SWPW-2	9/19/06 6:20	442.48			
SWPW-2	9/19/06 6:25	442.45			
SWPW-2	9/19/06 6:30	442.49			
SWPW-2	9/19/06 6:35	442.47			
SWPW-2	9/19/06 6:40	442.47			
SWPW-2	9/19/06 6:45	442.47			
SWPW-2	9/19/06 6:50	442.46			
SWPW-2	9/19/06 6:55	442.45			
SWPW-2	9/19/06 7:00	442.45			
SWPW-2	9/19/06 7:05	442.46			
SWPW-2	9/19/06 7:10	442.44			
SWPW-2	9/19/06 7:15	442.44			
SWPW-2	9/19/06 7:20	442.44			
SWPW-2	9/19/06 7:25	442.43			
SWPW-2	9/19/06 7:30	442.43			
SWPW-2	9/19/06 7:35	442.43			
SWPW-2	9/19/06 7:40	442.42			
SWPW-2	9/19/06 7:45	442.41			
SWPW-2	9/19/06 7:50	442.40			
SWPW-2	9/19/06 7:55	442.40			
SWPW-2	9/19/06 8:00	442.39			
SWPW-2	9/19/06 8:05	442.39			
SWPW-2	9/19/06 8:10	442.40			
SWPW-2	9/19/06 8:15	442.39			
SWPW-2	9/19/06 8:20	442.38			
SWPW-2	9/19/06 8:25	442.38			
SWPW-2	9/19/06 8:30	442.37			
SWPW-2	9/19/06 8:35	442.36			
SWPW-2	9/19/06 8:40	442.37			
SWPW-2	9/19/06 8:45	442.33			
SWPW-2	9/19/06 8:50	442.37			
SWPW-2	9/19/06 8:55	442.36			
SWPW-2	9/19/06 9:00	442.37			
SWPW-2	9/19/06 9:05	442.35			
SWPW-2	9/19/06 9:10	442.33			
SWPW-2	9/19/06 9:15	442.33			
SWPW-2	9/19/06 9:20	442.33			
SWPW-2	9/19/06 9:25	442.32			
SWPW-2	9/19/06 9:30	442.32			
SWPW-2	9/19/06 9:35	442.32			
SWPW-2	9/19/06 9:40	442.32			
SWPW-2	9/19/06 9:45	442.31			
SWPW-2	9/19/06 9:50	442.30			
SWPW-2	9/19/06 9:55	442.31			
SWPW-2	9/19/06 10:00	442.29			
SWPW-2	9/19/06 10:05	442.29			
SWPW-2	9/19/06 10:10	442.28			
SWPW-2	9/19/06 10:15	442.30			
SWPW-2	9/19/06 10:20	442.28			
SWPW-2	9/19/06 10:25	442.28			
SWPW-2	9/19/06 10:30	442.27			
SWPW-2	9/19/06 10:35	442.27			
SWPW-2	9/19/06 10:40	442.26			
SWPW-2	9/19/06 10:45	442.26			
SWPW-2	9/19/06 10:50	442.24			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/19/06 10:55	442.23			
SWPW-2	9/19/06 11:00	442.25			
SWPW-2	9/19/06 11:05	442.23			
SWPW-2	9/19/06 11:10	442.22			
SWPW-2	9/19/06 11:15	442.23			
SWPW-2	9/19/06 11:20	442.23			
SWPW-2	9/19/06 11:25	442.21			
SWPW-2	9/19/06 11:30	442.21			
SWPW-2	9/19/06 11:35	442.19			
SWPW-2	9/19/06 11:40	442.20			
SWPW-2	9/19/06 11:45	442.20			
SWPW-2	9/19/06 11:50	442.19			
SWPW-2	9/19/06 11:55	442.18			
SWPW-2	9/19/06 12:00	442.18			
SWPW-2	9/19/06 12:05	442.18			
SWPW-2	9/19/06 12:10	442.18			
SWPW-2	9/19/06 12:15	442.16			
SWPW-2	9/19/06 12:20	442.16			
SWPW-2	9/19/06 12:25	442.15			
SWPW-2	9/19/06 12:30	442.15			
SWPW-2	9/19/06 12:35	442.13			
SWPW-2	9/19/06 12:40	442.12			
SWPW-2	9/19/06 12:45	442.12			
SWPW-2	9/19/06 12:50	442.14			
SWPW-2	9/19/06 12:55	442.10			
SWPW-2	9/19/06 13:00	442.11			
SWPW-2	9/19/06 13:05	442.10			
SWPW-2	9/19/06 13:10	442.12			
SWPW-2	9/19/06 13:15	442.08			
SWPW-2	9/19/06 13:20	442.08			
SWPW-2	9/19/06 13:25	442.07			
SWPW-2	9/19/06 13:30	442.07			
SWPW-2	9/19/06 13:35	442.06			
SWPW-2	9/19/06 13:40	442.05			
SWPW-2	9/19/06 13:45	442.07			
SWPW-2	9/19/06 13:50	442.04			
SWPW-2	9/19/06 13:55	442.07			
SWPW-2	9/19/06 14:00	442.03			
SWPW-2	9/19/06 14:05	442.03			
SWPW-2	9/19/06 14:10	442.01			
SWPW-2	9/19/06 14:15	442.01			
SWPW-2	9/19/06 14:20	442.00			
SWPW-2	9/19/06 14:25	442.00			
SWPW-2	9/19/06 14:30	442.00			
SWPW-2	9/19/06 14:35	441.98			
SWPW-2	9/19/06 14:40	441.98			
SWPW-2	9/19/06 14:45	441.96			
SWPW-2	9/19/06 14:50	441.97			
SWPW-2	9/19/06 14:55	441.99			
SWPW-2	9/19/06 15:00	441.96			
SWPW-2	9/19/06 15:05	441.95			
SWPW-2	9/19/06 15:10	441.94			
SWPW-2	9/19/06 15:15	441.97			
SWPW-2	9/19/06 15:20	441.94			
SWPW-2	9/19/06 15:25	441.93			
SWPW-2	9/19/06 15:30	441.94			
SWPW-2	9/19/06 15:35	441.91			
SWPW-2	9/19/06 15:40	441.91			
SWPW-2	9/19/06 15:45	441.90			
SWPW-2	9/19/06 15:50	441.90			
SWPW-2	9/19/06 15:55	441.88			
SWPW-2	9/19/06 16:00	441.89			
SWPW-2	9/19/06 16:05	441.91			
SWPW-2	9/19/06 16:10	441.88			
SWPW-2	9/19/06 16:15	441.86			
SWPW-2	9/19/06 16:20	441.86			
SWPW-2	9/19/06 16:25	441.85			
SWPW-2	9/19/06 16:30	441.89			
SWPW-2	9/19/06 16:35	441.85			
SWPW-2	9/19/06 16:40	441.83			
SWPW-2	9/19/06 16:45	441.82			
SWPW-2	9/19/06 16:50	441.83			
SWPW-2	9/19/06 16:55	441.82			
SWPW-2	9/19/06 17:00	441.81			
SWPW-2	9/19/06 17:05	441.80			
SWPW-2	9/19/06 17:10	441.80			
SWPW-2	9/19/06 17:15	441.83			
SWPW-2	9/19/06 17:20	441.82			
SWPW-2	9/19/06 17:25	441.81			
SWPW-2	9/19/06 17:30	441.80			
SWPW-2	9/19/06 17:35	441.81			
SWPW-2	9/19/06 17:40	441.76			
SWPW-2	9/19/06 17:45	441.75			
SWPW-2	9/19/06 17:50	441.78			
SWPW-2	9/19/06 17:55	441.77			
SWPW-2	9/19/06 18:00	441.77			
SWPW-2	9/19/06 18:05	441.77			
SWPW-2	9/19/06 18:10	441.76			
SWPW-2	9/19/06 18:15	441.74			
SWPW-2	9/19/06 18:20	441.75			
SWPW-2	9/19/06 18:25	441.73			
SWPW-2	9/19/06 18:30	441.72			
SWPW-2	9/19/06 18:35	441.75			
SWPW-2	9/19/06 18:40	441.70			
SWPW-2	9/19/06 18:45	441.73			
SWPW-2	9/19/06 18:50	441.68			
SWPW-2	9/19/06 18:55	441.72			
SWPW-2	9/19/06 19:00	441.71			
SWPW-2	9/19/06 19:05	441.70			
SWPW-2	9/19/06 19:10	441.70			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/19/06 19:15	441.69			
SWPW-2	9/19/06 19:20	441.69			
SWPW-2	9/19/06 19:25	441.68			
SWPW-2	9/19/06 19:30	441.70			
SWPW-2	9/19/06 19:35	441.70			
SWPW-2	9/19/06 19:40	441.69			
SWPW-2	9/19/06 19:45	441.65			
SWPW-2	9/19/06 19:50	441.64			
SWPW-2	9/19/06 19:55	441.64			
SWPW-2	9/19/06 20:00	441.63			
SWPW-2	9/19/06 20:05	441.66			
SWPW-2	9/19/06 20:10	441.66			
SWPW-2	9/19/06 20:15	441.63			
SWPW-2	9/19/06 20:20	441.62			
SWPW-2	9/19/06 20:25	441.65			
SWPW-2	9/19/06 20:30	441.61			
SWPW-2	9/19/06 20:35	441.65			
SWPW-2	9/19/06 20:40	441.61			
SWPW-2	9/19/06 20:45	441.61			
SWPW-2	9/19/06 20:50	441.64			
SWPW-2	9/19/06 20:55	441.60			
SWPW-2	9/19/06 21:00	441.59			
SWPW-2	9/19/06 21:05	441.61			
SWPW-2	9/19/06 21:10	441.60			
SWPW-2	9/19/06 21:15	441.59			
SWPW-2	9/19/06 21:20	441.59			
SWPW-2	9/19/06 21:25	441.58			
SWPW-2	9/19/06 21:30	441.58			
SWPW-2	9/19/06 21:35	441.58			
SWPW-2	9/19/06 21:40	441.57			
SWPW-2	9/19/06 21:45	441.56			
SWPW-2	9/19/06 21:50	441.56			
SWPW-2	9/19/06 21:55	441.56			
SWPW-2	9/19/06 22:00	441.56			
SWPW-2	9/19/06 22:05	441.55			
SWPW-2	9/19/06 22:10	441.55			
SWPW-2	9/19/06 22:15	441.55			
SWPW-2	9/19/06 22:20	441.54			
SWPW-2	9/19/06 22:25	441.54			
SWPW-2	9/19/06 22:30	441.53			
SWPW-2	9/19/06 22:35	441.54			
SWPW-2	9/19/06 22:40	441.52			
SWPW-2	9/19/06 22:45	441.51			
SWPW-2	9/19/06 22:50	441.50			
SWPW-2	9/19/06 22:55	441.52			
SWPW-2	9/19/06 23:00	441.52			
SWPW-2	9/19/06 23:05	441.52			
SWPW-2	9/19/06 23:10	441.51			
SWPW-2	9/19/06 23:15	441.51			
SWPW-2	9/19/06 23:20	441.51			
SWPW-2	9/19/06 23:25	441.46			
SWPW-2	9/19/06 23:30	441.49			
SWPW-2	9/19/06 23:35	441.48			
SWPW-2	9/19/06 23:40	441.48			
SWPW-2	9/19/06 23:45	441.49			
SWPW-2	9/19/06 23:50	441.48			
SWPW-2	9/19/06 23:55	441.44			
SWPW-2	9/20/06 0:00	441.48			
SWPW-2	9/20/06 0:05	441.47			
SWPW-2	9/20/06 0:10	441.42			
SWPW-2	9/20/06 0:15	441.45			
SWPW-2	9/20/06 0:20	441.45			
SWPW-2	9/20/06 0:25	441.45			
SWPW-2	9/20/06 0:30	441.45			
SWPW-2	9/20/06 0:35	441.41			
SWPW-2	9/20/06 0:40	441.41			
SWPW-2	9/20/06 0:45	441.39			
SWPW-2	9/20/06 0:50	441.40			
SWPW-2	9/20/06 0:55	441.42			
SWPW-2	9/20/06 1:00	441.41			
SWPW-2	9/20/06 1:05	441.37			
SWPW-2	9/20/06 1:10	441.41			
SWPW-2	9/20/06 1:15	441.36			
SWPW-2	9/20/06 1:20	441.36			
SWPW-2	9/20/06 1:25	441.39			
SWPW-2	9/20/06 1:30	441.35			
SWPW-2	9/20/06 1:35	441.38			
SWPW-2	9/20/06 1:40	441.34			
SWPW-2	9/20/06 1:45	441.34			
SWPW-2	9/20/06 1:50	441.37			
SWPW-2	9/20/06 1:55	441.37			
SWPW-2	9/20/06 2:00	441.33			
SWPW-2	9/20/06 2:05	441.36			
SWPW-2	9/20/06 2:10	441.31			
SWPW-2	9/20/06 2:15	441.30			
SWPW-2	9/20/06 2:20	441.30			
SWPW-2	9/20/06 2:25	441.30			
SWPW-2	9/20/06 2:30	441.30			
SWPW-2	9/20/06 2:35	441.32			
SWPW-2	9/20/06 2:40	441.29			
SWPW-2	9/20/06 2:45	441.28			
SWPW-2	9/20/06 2:50	441.28			
SWPW-2	9/20/06 2:55	441.27			
SWPW-2	9/20/06 3:00	441.27			
SWPW-2	9/20/06 3:05	441.28			
SWPW-2	9/20/06 3:10	441.25			
SWPW-2	9/20/06 3:15	441.28			
SWPW-2	9/20/06 3:20	441.25			
SWPW-2	9/20/06 3:25	441.24			
SWPW-2	9/20/06 3:30	441.24			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/20/06 3:35	441.23			
SWPW-2	9/20/06 3:40	441.22			
SWPW-2	9/20/06 3:45	441.21			
SWPW-2	9/20/06 3:50	441.25			
SWPW-2	9/20/06 3:55	441.25			
SWPW-2	9/20/06 4:00	441.22			
SWPW-2	9/20/06 4:05	441.23			
SWPW-2	9/20/06 4:10	441.18			
SWPW-2	9/20/06 4:15	441.23			
SWPW-2	9/20/06 4:20	441.18			
SWPW-2	9/20/06 4:25	441.17			
SWPW-2	9/20/06 4:30	441.17			
SWPW-2	9/20/06 4:35	441.21			
SWPW-2	9/20/06 4:40	441.16			
SWPW-2	9/20/06 4:45	441.19			
SWPW-2	9/20/06 4:50	441.16			
SWPW-2	9/20/06 4:55	441.17			
SWPW-2	9/20/06 5:00	441.17			
SWPW-2	9/20/06 5:05	441.15			
SWPW-2	9/20/06 5:10	441.16			
SWPW-2	9/20/06 5:15	441.16			
SWPW-2	9/20/06 5:20	441.15			
SWPW-2	9/20/06 5:25	441.16			
SWPW-2	9/20/06 5:30	441.14			
SWPW-2	9/20/06 5:35	441.14			
SWPW-2	9/20/06 5:40	441.15			
SWPW-2	9/20/06 5:45	441.14			
SWPW-2	9/20/06 5:50	441.12			
SWPW-2	9/20/06 5:55	441.09			
SWPW-2	9/20/06 6:00	441.11			
SWPW-2	9/20/06 6:05	441.12			
SWPW-2	9/20/06 6:10	441.08			
SWPW-2	9/20/06 6:15	441.08			
SWPW-2	9/20/06 6:20	441.12			
SWPW-2	9/20/06 6:25	441.10			
SWPW-2	9/20/06 6:30	441.11			
SWPW-2	9/20/06 6:35	441.06			
SWPW-2	9/20/06 6:40	441.08			
SWPW-2	9/20/06 6:45	441.09			
SWPW-2	9/20/06 6:50	441.09			
SWPW-2	9/20/06 6:55	441.05			
SWPW-2	9/20/06 7:00	441.05			
SWPW-2	9/20/06 7:05	441.03			
SWPW-2	9/20/06 7:10	441.06			
SWPW-2	9/20/06 7:15	441.03			
SWPW-2	9/20/06 7:20	441.06			
SWPW-2	9/20/06 7:25	441.03			
SWPW-2	9/20/06 7:30	441.03			
SWPW-2	9/20/06 7:35	441.05			
SWPW-2	9/20/06 7:40	441.02			
SWPW-2	9/20/06 7:45	441.04			
SWPW-2	9/20/06 7:50	441.00			
SWPW-2	9/20/06 7:55	441.04			
SWPW-2	9/20/06 8:00	441.00			
SWPW-2	9/20/06 8:05	441.04			
SWPW-2	9/20/06 8:10	441.04			
SWPW-2	9/20/06 8:15	440.99			
SWPW-2	9/20/06 8:20	441.03			
SWPW-2	9/20/06 8:25	440.99			
SWPW-2	9/20/06 8:30	441.02			
SWPW-2	9/20/06 8:35	441.02			
SWPW-2	9/20/06 8:40	441.01			
SWPW-2	9/20/06 8:45	441.01			
SWPW-2	9/20/06 8:50	441.01			
SWPW-2	9/20/06 8:55	440.96			
SWPW-2	9/20/06 9:00	441.00			
SWPW-2	9/20/06 9:05	440.97			
SWPW-2	9/20/06 9:10	440.95			
SWPW-2	9/20/06 9:15	440.98			
SWPW-2	9/20/06 9:20	440.95			
SWPW-2	9/20/06 9:25	440.98			
SWPW-2	9/20/06 9:30	440.95			
SWPW-2	9/20/06 9:35	440.98			
SWPW-2	9/20/06 9:40	440.98			
SWPW-2	9/20/06 9:45	440.94			
SWPW-2	9/20/06 9:50	440.97			
SWPW-2	9/20/06 9:55	440.93			
SWPW-2	9/20/06 10:00	440.96			
SWPW-2	9/20/06 10:05	440.96			
SWPW-2	9/20/06 10:10	440.96			
SWPW-2	9/20/06 10:15	440.92			
SWPW-2	9/20/06 10:20	440.94			
SWPW-2	9/20/06 10:25	440.94			
SWPW-2	9/20/06 10:30	440.91			
SWPW-2	9/20/06 10:35	440.93			
SWPW-2	9/20/06 10:40	440.93			
SWPW-2	9/20/06 10:45	440.92			
SWPW-2	9/20/06 10:50	440.92			
SWPW-2	9/20/06 10:55	440.92			
SWPW-2	9/20/06 11:00	440.92			
SWPW-2	9/20/06 11:05	440.92			
SWPW-2	9/20/06 11:10	440.92			
SWPW-2	9/20/06 11:15	440.91			
SWPW-2	9/20/06 11:20	440.90			
SWPW-2	9/20/06 11:25	440.87			
SWPW-2	9/20/06 11:30	440.91			
SWPW-2	9/20/06 11:35	440.86			
SWPW-2	9/20/06 11:40	440.89			
SWPW-2	9/20/06 11:45	440.89			
SWPW-2	9/20/06 11:50	440.89			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/20/06 11:55	440.88			
SWPW-2	9/20/06 12:00	440.88			
SWPW-2	9/20/06 12:05	440.88			
SWPW-2	9/20/06 12:10	440.87			
SWPW-2	9/20/06 12:15	440.88			
SWPW-2	9/20/06 12:20	440.86			
SWPW-2	9/20/06 12:25	440.86			
SWPW-2	9/20/06 12:30	440.81			
SWPW-2	9/20/06 12:35	440.84			
SWPW-2	9/20/06 12:40	440.80			
SWPW-2	9/20/06 12:45	440.85			
SWPW-2	9/20/06 12:50	440.84			
SWPW-2	9/20/06 12:55	440.83			
SWPW-2	9/20/06 13:00	440.83			
SWPW-2	9/20/06 13:05	440.82			
SWPW-2	9/20/06 13:10	440.83			
SWPW-2	9/20/06 13:15	440.81			
SWPW-2	9/20/06 13:20	440.79			
SWPW-2	9/20/06 13:25	440.80			
SWPW-2	9/20/06 13:30	440.79			
SWPW-2	9/20/06 13:35	440.78			
SWPW-2	9/20/06 13:40	440.78			
SWPW-2	9/20/06 13:45	440.78			
SWPW-2	9/20/06 13:50	440.77			
SWPW-2	9/20/06 13:55	440.76			
SWPW-2	9/20/06 14:00	440.75			
SWPW-2	9/20/06 14:05	440.75			
SWPW-2	9/20/06 14:10	440.73			
SWPW-2	9/20/06 14:15	440.74			
SWPW-2	9/20/06 14:20	440.74			
SWPW-2	9/20/06 14:25	440.73			
SWPW-2	9/20/06 14:30	440.73			
SWPW-2	9/20/06 14:35	440.73			
SWPW-2	9/20/06 14:40	440.73			
SWPW-2	9/20/06 14:45	440.71			
SWPW-2	9/20/06 14:50	440.71			
SWPW-2	9/20/06 14:55	440.70			
SWPW-2	9/20/06 15:00	440.72			
SWPW-2	9/20/06 15:05	440.71			
SWPW-2	9/20/06 15:10	440.69			
SWPW-2	9/20/06 15:15	440.70			
SWPW-2	9/20/06 15:20	440.70			
SWPW-2	9/20/06 15:25	440.69			
SWPW-2	9/20/06 15:30	440.68			
SWPW-2	9/20/06 15:35	440.68			
SWPW-2	9/20/06 15:40	440.69			
SWPW-2	9/20/06 15:45	440.67			
SWPW-2	9/20/06 15:50	440.64			
SWPW-2	9/20/06 15:55	440.67			
SWPW-2	9/20/06 16:00	440.67			
SWPW-2	9/20/06 16:05	440.62			
SWPW-2	9/20/06 16:10	440.66			
SWPW-2	9/20/06 16:15	440.66			
SWPW-2	9/20/06 16:20	440.65			
SWPW-2	9/20/06 16:25	440.64			
SWPW-2	9/20/06 16:30	440.63			
SWPW-2	9/20/06 16:35	440.63			
SWPW-2	9/20/06 16:40	440.62			
SWPW-2	9/20/06 16:45	440.62			
SWPW-2	9/20/06 16:50	440.61			
SWPW-2	9/20/06 16:55	440.61			
SWPW-2	9/20/06 17:00	440.60			
SWPW-2	9/20/06 17:05	440.60			
SWPW-2	9/20/06 17:10	440.59			
SWPW-2	9/20/06 17:15	440.59			
SWPW-2	9/20/06 17:20	440.58			
SWPW-2	9/20/06 17:25	440.57			
SWPW-2	9/20/06 17:30	440.57			
SWPW-2	9/20/06 17:35	440.56			
SWPW-2	9/20/06 17:40	440.56			
SWPW-2	9/20/06 17:45	440.55			
SWPW-2	9/20/06 17:50	440.56			
SWPW-2	9/20/06 17:55	440.55			
SWPW-2	9/20/06 18:00	440.58			
SWPW-2	9/20/06 18:05	440.54			
SWPW-2	9/20/06 18:10	440.55			
SWPW-2	9/20/06 18:15	440.54			
SWPW-2	9/20/06 18:20	440.52			
SWPW-2	9/20/06 18:25	440.56			
SWPW-2	9/20/06 18:30	440.52			
SWPW-2	9/20/06 18:35	440.55			
SWPW-2	9/20/06 18:40	440.55			
SWPW-2	9/20/06 18:45	440.52			
SWPW-2	9/20/06 18:50	440.51			
SWPW-2	9/20/06 18:55	440.51			
SWPW-2	9/20/06 19:00	440.50			
SWPW-2	9/20/06 19:05	440.51			
SWPW-2	9/20/06 19:10	440.53			
SWPW-2	9/20/06 19:15	440.50			
SWPW-2	9/20/06 19:20	440.51			
SWPW-2	9/20/06 19:25	440.50			
SWPW-2	9/20/06 19:30	440.51			
SWPW-2	9/20/06 19:35	440.50			
SWPW-2	9/20/06 19:40	440.51			
SWPW-2	9/20/06 19:45	440.50			
SWPW-2	9/20/06 19:50	440.50			
SWPW-2	9/20/06 19:55	440.49			
SWPW-2	9/20/06 20:00	440.48			
SWPW-2	9/20/06 20:05	440.49			
SWPW-2	9/20/06 20:10	440.49			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/20/06 20:15	440.48			
SWPW-2	9/20/06 20:20	440.49			
SWPW-2	9/20/06 20:25	440.48			
SWPW-2	9/20/06 20:30	440.48			
SWPW-2	9/20/06 20:35	440.48			
SWPW-2	9/20/06 20:40	440.48			
SWPW-2	9/20/06 20:45	440.44			
SWPW-2	9/20/06 20:50	440.48			
SWPW-2	9/20/06 20:55	440.47			
SWPW-2	9/20/06 21:00	440.48			
SWPW-2	9/20/06 21:05	440.45			
SWPW-2	9/20/06 21:10	440.46			
SWPW-2	9/20/06 21:15	440.46			
SWPW-2	9/20/06 21:20	440.46			
SWPW-2	9/20/06 21:25	440.45			
SWPW-2	9/20/06 21:30	440.45			
SWPW-2	9/20/06 21:35	440.44			
SWPW-2	9/20/06 21:40	440.45			
SWPW-2	9/20/06 21:45	440.45			
SWPW-2	9/20/06 21:50	440.45			
SWPW-2	9/20/06 21:55	440.43			
SWPW-2	9/20/06 22:00	440.43			
SWPW-2	9/20/06 22:05	440.43			
SWPW-2	9/20/06 22:10	440.42			
SWPW-2	9/20/06 22:15	440.42			
SWPW-2	9/20/06 22:20	440.41			
SWPW-2	9/20/06 22:25	440.44			
SWPW-2	9/20/06 22:30	440.41			
SWPW-2	9/20/06 22:35	440.40			
SWPW-2	9/20/06 22:40	440.38			
SWPW-2	9/20/06 22:45	440.39			
SWPW-2	9/20/06 22:50	440.38			
SWPW-2	9/20/06 22:55	440.39			
SWPW-2	9/20/06 23:00	440.38			
SWPW-2	9/20/06 23:05	440.38			
SWPW-2	9/20/06 23:10	440.37			
SWPW-2	9/20/06 23:15	440.37			
SWPW-2	9/20/06 23:20	440.36			
SWPW-2	9/20/06 23:25	440.37			
SWPW-2	9/20/06 23:30	440.36			
SWPW-2	9/20/06 23:35	440.35			
SWPW-2	9/20/06 23:40	440.36			
SWPW-2	9/20/06 23:45	440.36			
SWPW-2	9/20/06 23:50	440.35			
SWPW-2	9/20/06 23:55	440.35			
SWPW-2	9/21/06 0:00	440.35			
SWPW-2	9/21/06 0:05	440.35			
SWPW-2	9/21/06 0:10	440.34			
SWPW-2	9/21/06 0:15	440.34			
SWPW-2	9/21/06 0:20	440.33			
SWPW-2	9/21/06 0:25	440.35			
SWPW-2	9/21/06 0:30	440.33			
SWPW-2	9/21/06 0:35	440.30			
SWPW-2	9/21/06 0:40	440.31			
SWPW-2	9/21/06 0:45	440.33			
SWPW-2	9/21/06 0:50	440.29			
SWPW-2	9/21/06 0:55	440.32			
SWPW-2	9/21/06 1:00	440.32			
SWPW-2	9/21/06 1:05	440.31			
SWPW-2	9/21/06 1:10	440.31			
SWPW-2	9/21/06 1:15	440.28			
SWPW-2	9/21/06 1:20	440.28			
SWPW-2	9/21/06 1:25	440.28			
SWPW-2	9/21/06 1:30	440.28			
SWPW-2	9/21/06 1:35	440.27			
SWPW-2	9/21/06 1:40	440.27			
SWPW-2	9/21/06 1:45	440.26			
SWPW-2	9/21/06 1:50	440.29			
SWPW-2	9/21/06 1:55	440.26			
SWPW-2	9/21/06 2:00	440.26			
SWPW-2	9/21/06 2:05	440.25			
SWPW-2	9/21/06 2:10	440.24			
SWPW-2	9/21/06 2:15	440.24			
SWPW-2	9/21/06 2:20	440.24			
SWPW-2	9/21/06 2:25	440.22			
SWPW-2	9/21/06 2:30	440.22			
SWPW-2	9/21/06 2:35	440.22			
SWPW-2	9/21/06 2:40	440.22			
SWPW-2	9/21/06 2:45	440.20			
SWPW-2	9/21/06 2:50	440.17			
SWPW-2	9/21/06 2:55	440.21			
SWPW-2	9/21/06 3:00	440.20			
SWPW-2	9/21/06 3:05	440.19			
SWPW-2	9/21/06 3:10	440.20			
SWPW-2	9/21/06 3:15	440.19			
SWPW-2	9/21/06 3:20	440.19			
SWPW-2	9/21/06 3:25	440.18			
SWPW-2	9/21/06 3:30	440.17			
SWPW-2	9/21/06 3:35	440.18			
SWPW-2	9/21/06 3:40	440.17			
SWPW-2	9/21/06 3:45	440.16			
SWPW-2	9/21/06 3:50	440.13			
SWPW-2	9/21/06 3:55	440.13			
SWPW-2	9/21/06 4:00	440.13			
SWPW-2	9/21/06 4:05	440.15			
SWPW-2	9/21/06 4:10	440.11			
SWPW-2	9/21/06 4:15	440.15			
SWPW-2	9/21/06 4:20	440.14			
SWPW-2	9/21/06 4:25	440.11			
SWPW-2	9/21/06 4:30	440.10			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/21/06 4:35	440.13			
SWPW-2	9/21/06 4:40	440.13			
SWPW-2	9/21/06 4:45	440.13			
SWPW-2	9/21/06 4:50	440.08			
SWPW-2	9/21/06 4:55	440.09			
SWPW-2	9/21/06 5:00	440.11			
SWPW-2	9/21/06 5:05	440.08			
SWPW-2	9/21/06 5:10	440.07			
SWPW-2	9/21/06 5:15	440.08			
SWPW-2	9/21/06 5:20	440.10			
SWPW-2	9/21/06 5:25	440.06			
SWPW-2	9/21/06 5:30	440.09			
SWPW-2	9/21/06 5:35	440.05			
SWPW-2	9/21/06 5:40	440.05			
SWPW-2	9/21/06 5:45	440.06			
SWPW-2	9/21/06 5:50	440.07			
SWPW-2	9/21/06 5:55	440.07			
SWPW-2	9/21/06 6:00	440.07			
SWPW-2	9/21/06 6:05	440.03			
SWPW-2	9/21/06 6:10	440.02			
SWPW-2	9/21/06 6:15	440.02			
SWPW-2	9/21/06 6:20	440.02			
SWPW-2	9/21/06 6:25	440.05			
SWPW-2	9/21/06 6:30	440.04			
SWPW-2	9/21/06 6:35	440.04			
SWPW-2	9/21/06 6:40	440.03			
SWPW-2	9/21/06 6:45	440.02			
SWPW-2	9/21/06 6:50	440.03			
SWPW-2	9/21/06 6:55	440.03			
SWPW-2	9/21/06 7:00	440.01			
SWPW-2	9/21/06 7:05	440.01			
SWPW-2	9/21/06 7:10	440.00			
SWPW-2	9/21/06 7:15	440.00			
SWPW-2	9/21/06 7:20	440.00			
SWPW-2	9/21/06 7:25	440.01			
SWPW-2	9/21/06 7:30	439.99			
SWPW-2	9/21/06 7:35	440.00			
SWPW-2	9/21/06 7:40	439.99			
SWPW-2	9/21/06 7:45	439.99			
SWPW-2	9/21/06 7:50	439.98			
SWPW-2	9/21/06 7:55	439.98			
SWPW-2	9/21/06 8:00	439.97			
SWPW-2	9/21/06 8:05	440.01			
SWPW-2	9/21/06 8:10	439.97			
SWPW-2	9/21/06 8:15	439.96			
SWPW-2	9/21/06 8:20	439.97			
SWPW-2	9/21/06 8:25	439.95			
SWPW-2	9/21/06 8:30	439.98			
SWPW-2	9/21/06 8:35	439.95			
SWPW-2	9/21/06 8:40	439.98			
SWPW-2	9/21/06 8:45	439.94			
SWPW-2	9/21/06 8:50	439.95			
SWPW-2	9/21/06 8:55	439.95			
SWPW-2	9/21/06 9:00	439.99			
SWPW-2	9/21/06 9:05	439.95			
SWPW-2	9/21/06 9:10	439.94			
SWPW-2	9/21/06 9:15	439.93			
SWPW-2	9/21/06 9:20	439.94			
SWPW-2	9/21/06 9:25	439.94			
SWPW-2	9/21/06 9:30	439.94			
SWPW-2	9/21/06 9:35	439.94			
SWPW-2	9/21/06 9:40	439.94			
SWPW-2	9/21/06 9:45	439.93			
SWPW-2	9/21/06 9:50	439.94			
SWPW-2	9/21/06 9:55	439.93			
SWPW-2	9/21/06 10:00	439.92			
SWPW-2	9/21/06 10:05	439.90			
SWPW-2	9/21/06 10:10	439.92			
SWPW-2	9/21/06 10:15	439.93			
SWPW-2	9/21/06 10:20	439.91			
SWPW-2	9/21/06 10:25	439.91			
SWPW-2	9/21/06 10:30	439.88			
SWPW-2	9/21/06 10:35	439.90			
SWPW-2	9/21/06 10:40	439.93			
SWPW-2	9/21/06 10:45	439.90			
SWPW-2	9/21/06 10:50	439.88			
SWPW-2	9/21/06 10:55	439.88			
SWPW-2	9/21/06 11:00	439.90			
SWPW-2	9/21/06 11:05	439.90			
SWPW-2	9/21/06 11:10	439.88			
SWPW-2	9/21/06 11:15	439.88			
SWPW-2	9/21/06 11:20	439.86			
SWPW-2	9/21/06 11:25	439.88			
SWPW-2	9/21/06 11:30	439.87			
SWPW-2	9/21/06 11:35	439.86			
SWPW-2	9/21/06 11:40	439.86			
SWPW-2	9/21/06 11:45	439.85			
SWPW-2	9/21/06 11:50	439.84			
SWPW-2	9/21/06 11:55	439.85			
SWPW-2	9/21/06 12:00	439.84			
SWPW-2	9/21/06 12:05	439.84			
SWPW-2	9/21/06 12:10	439.87			
SWPW-2	9/21/06 12:15	439.83			
SWPW-2	9/21/06 12:20	439.86			
SWPW-2	9/21/06 12:25	439.86			
SWPW-2	9/21/06 12:30	439.83			
SWPW-2	9/21/06 12:35	439.84			
SWPW-2	9/21/06 12:40	439.87			
SWPW-2	9/21/06 12:45	439.82			
SWPW-2	9/21/06 12:50	439.82			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/21/06 12:55	439.81			
SWPW-2	9/21/06 13:00	439.81			
SWPW-2	9/21/06 13:05	439.81			
SWPW-2	9/21/06 13:10	439.81			
SWPW-2	9/21/06 13:15	439.80			
SWPW-2	9/21/06 13:20	439.80			
SWPW-2	9/21/06 13:25	439.80			
SWPW-2	9/21/06 13:30	439.79			
SWPW-2	9/21/06 13:35	439.79			
SWPW-2	9/21/06 13:40	439.79			
SWPW-2	9/21/06 13:45	439.77			
SWPW-2	9/21/06 13:50	439.78			
SWPW-2	9/21/06 13:55	439.78			
SWPW-2	9/21/06 14:00	439.78			
SWPW-2	9/21/06 14:05	439.76			
SWPW-2	9/21/06 14:10	439.77			
SWPW-2	9/21/06 14:15	439.78			
SWPW-2	9/21/06 14:20	439.73			
SWPW-2	9/21/06 14:25	439.77			
SWPW-2	9/21/06 14:30	439.75			
SWPW-2	9/21/06 14:35	439.73			
SWPW-2	9/21/06 14:40	439.73			
SWPW-2	9/21/06 14:45	439.76			
SWPW-2	9/21/06 14:50	439.77			
SWPW-2	9/21/06 14:55	439.70			
SWPW-2	9/21/06 15:00	439.74			
SWPW-2	9/21/06 15:05	439.75			
SWPW-2	9/21/06 15:10	439.73			
SWPW-2	9/21/06 15:15	439.72			
SWPW-2	9/21/06 15:20	439.68			
SWPW-2	9/21/06 15:25	439.70			
SWPW-2	9/21/06 15:30	439.71			
SWPW-2	9/21/06 15:35	439.70			
SWPW-2	9/21/06 15:40	439.70			
SWPW-2	9/21/06 15:45	439.69			
SWPW-2	9/21/06 15:50	439.69			
SWPW-2	9/21/06 15:55	439.68			
SWPW-2	9/21/06 16:00	439.68			
SWPW-2	9/21/06 16:05	439.68			
SWPW-2	9/21/06 16:10	439.68			
SWPW-2	9/21/06 16:15	439.66			
SWPW-2	9/21/06 16:20	439.67			
SWPW-2	9/21/06 16:25	439.66			
SWPW-2	9/21/06 16:30	439.67			
SWPW-2	9/21/06 16:35	439.66			
SWPW-2	9/21/06 16:40	439.66			
SWPW-2	9/21/06 16:45	439.66			
SWPW-2	9/21/06 16:50	439.69			
SWPW-2	9/21/06 16:55	439.65			
SWPW-2	9/21/06 17:00	439.64			
SWPW-2	9/21/06 17:05	439.63			
SWPW-2	9/21/06 17:10	439.65			
SWPW-2	9/21/06 17:15	439.64			
SWPW-2	9/21/06 17:20	439.63			
SWPW-2	9/21/06 17:25	439.63			
SWPW-2	9/21/06 17:30	439.62			
SWPW-2	9/21/06 17:35	439.63			
SWPW-2	9/21/06 17:40	439.62			
SWPW-2	9/21/06 17:45	439.59			
SWPW-2	9/21/06 17:50	439.63			
SWPW-2	9/21/06 17:55	439.58			
SWPW-2	9/21/06 18:00	439.61			
SWPW-2	9/21/06 18:05	439.62			
SWPW-2	9/21/06 18:10	439.61			
SWPW-2	9/21/06 18:15	439.62			
SWPW-2	9/21/06 18:20	439.61			
SWPW-2	9/21/06 18:25	439.61			
SWPW-2	9/21/06 18:30	439.58			
SWPW-2	9/21/06 18:35	439.59			
SWPW-2	9/21/06 18:40	439.59			
SWPW-2	9/21/06 18:45	439.57			
SWPW-2	9/21/06 18:50	439.60			
SWPW-2	9/21/06 18:55	439.59			
SWPW-2	9/21/06 19:00	439.58			
SWPW-2	9/21/06 19:05	439.58			
SWPW-2	9/21/06 19:10	439.55			
SWPW-2	9/21/06 19:15	439.58			
SWPW-2	9/21/06 19:20	439.58			
SWPW-2	9/21/06 19:25	439.58			
SWPW-2	9/21/06 19:30	439.57			
SWPW-2	9/21/06 19:35	439.58			
SWPW-2	9/21/06 19:40	439.58			
SWPW-2	9/21/06 19:45	439.58			
SWPW-2	9/21/06 19:50	439.55			
SWPW-2	9/21/06 19:55	439.53			
SWPW-2	9/21/06 20:00	439.53			
SWPW-2	9/21/06 20:05	439.56			
SWPW-2	9/21/06 20:10	439.56			
SWPW-2	9/21/06 20:15	439.55			
SWPW-2	9/21/06 20:20	439.55			
SWPW-2	9/21/06 20:25	439.55			
SWPW-2	9/21/06 20:30	439.55			
SWPW-2	9/21/06 20:35	439.54			
SWPW-2	9/21/06 20:40	439.54			
SWPW-2	9/21/06 20:45	439.53			
SWPW-2	9/21/06 20:50	439.56			
SWPW-2	9/21/06 20:55	439.53			
SWPW-2	9/21/06 21:00	439.52			
SWPW-2	9/21/06 21:05	439.57			
SWPW-2	9/21/06 21:10	439.56			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/21/06 21:15	439.53			
SWPW-2	9/21/06 21:20	439.52			
SWPW-2	9/21/06 21:25	439.52			
SWPW-2	9/21/06 21:30	439.52			
SWPW-2	9/21/06 21:35	439.52			
SWPW-2	9/21/06 21:40	439.51			
SWPW-2	9/21/06 21:45	439.53			
SWPW-2	9/21/06 21:50	439.52			
SWPW-2	9/21/06 21:55	439.56			
SWPW-2	9/21/06 22:00	439.52			
SWPW-2	9/21/06 22:05	439.52			
SWPW-2	9/21/06 22:10	439.52			
SWPW-2	9/21/06 22:15	439.52			
SWPW-2	9/21/06 22:20	439.52			
SWPW-2	9/21/06 22:25	439.52			
SWPW-2	9/21/06 22:30	439.52			
SWPW-2	9/21/06 22:35	439.52			
SWPW-2	9/21/06 22:40	439.51			
SWPW-2	9/21/06 22:45	439.51			
SWPW-2	9/21/06 22:50	439.49			
SWPW-2	9/21/06 22:55	439.50			
SWPW-2	9/21/06 23:00	439.50			
SWPW-2	9/21/06 23:05	439.49			
SWPW-2	9/21/06 23:10	439.49			
SWPW-2	9/21/06 23:15	439.49			
SWPW-2	9/21/06 23:20	439.48			
SWPW-2	9/21/06 23:25	439.51			
SWPW-2	9/21/06 23:30	439.51			
SWPW-2	9/21/06 23:35	439.47			
SWPW-2	9/21/06 23:40	439.49			
SWPW-2	9/21/06 23:45	439.49			
SWPW-2	9/21/06 23:50	439.46			
SWPW-2	9/21/06 23:55	439.49			
SWPW-2	9/22/06 0:00	439.49			
SWPW-2	9/22/06 0:05	439.46			
SWPW-2	9/22/06 0:10	439.48			
SWPW-2	9/22/06 0:15	439.45			
SWPW-2	9/22/06 0:20	439.48			
SWPW-2	9/22/06 0:25	439.48			
SWPW-2	9/22/06 0:30	439.43			
SWPW-2	9/22/06 0:35	439.47			
SWPW-2	9/22/06 0:40	439.46			
SWPW-2	9/22/06 0:45	439.47			
SWPW-2	9/22/06 0:50	439.47			
SWPW-2	9/22/06 0:55	439.42			
SWPW-2	9/22/06 1:00	439.46			
SWPW-2	9/22/06 1:05	439.47			
SWPW-2	9/22/06 1:10	439.47			
SWPW-2	9/22/06 1:15	439.43			
SWPW-2	9/22/06 1:20	439.43			
SWPW-2	9/22/06 1:25	439.42			
SWPW-2	9/22/06 1:30	439.42			
SWPW-2	9/22/06 1:35	439.41			
SWPW-2	9/22/06 1:40	439.42			
SWPW-2	9/22/06 1:45	439.42			
SWPW-2	9/22/06 1:50	439.41			
SWPW-2	9/22/06 1:55	439.40			
SWPW-2	9/22/06 2:00	439.40			
SWPW-2	9/22/06 2:05	439.40			
SWPW-2	9/22/06 2:10	439.41			
SWPW-2	9/22/06 2:15	439.39			
SWPW-2	9/22/06 2:20	439.40			
SWPW-2	9/22/06 2:25	439.39			
SWPW-2	9/22/06 2:30	439.40			
SWPW-2	9/22/06 2:35	439.39			
SWPW-2	9/22/06 2:40	439.39			
SWPW-2	9/22/06 2:45	439.39			
SWPW-2	9/22/06 2:50	439.38			
SWPW-2	9/22/06 2:55	439.38			
SWPW-2	9/22/06 3:00	439.38			
SWPW-2	9/22/06 3:05	439.38			
SWPW-2	9/22/06 3:10	439.39			
SWPW-2	9/22/06 3:15	439.35			
SWPW-2	9/22/06 3:20	439.35			
SWPW-2	9/22/06 3:25	439.39			
SWPW-2	9/22/06 3:30	439.39			
SWPW-2	9/22/06 3:35	439.34			
SWPW-2	9/22/06 3:40	439.37			
SWPW-2	9/22/06 3:45	439.32			
SWPW-2	9/22/06 3:50	439.34			
SWPW-2	9/22/06 3:55	439.32			
SWPW-2	9/22/06 4:00	439.36			
SWPW-2	9/22/06 4:05	439.35			
SWPW-2	9/22/06 4:10	439.35			
SWPW-2	9/22/06 4:15	439.35			
SWPW-2	9/22/06 4:20	439.34			
SWPW-2	9/22/06 4:25	439.33			
SWPW-2	9/22/06 4:30	439.32			
SWPW-2	9/22/06 4:35	439.34			
SWPW-2	9/22/06 4:40	439.32			
SWPW-2	9/22/06 4:45	439.33			
SWPW-2	9/22/06 4:50	439.32			
SWPW-2	9/22/06 4:55	439.28			
SWPW-2	9/22/06 5:00	439.29			
SWPW-2	9/22/06 5:05	439.31			
SWPW-2	9/22/06 5:10	439.28			
SWPW-2	9/22/06 5:15	439.27			
SWPW-2	9/22/06 5:20	439.27			
SWPW-2	9/22/06 5:25	439.27			
SWPW-2	9/22/06 5:30	439.26			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/22/06 5:35	439.27			
SWPW-2	9/22/06 5:40	439.26			
SWPW-2	9/22/06 5:45	439.26			
SWPW-2	9/22/06 5:50	439.26			
SWPW-2	9/22/06 5:55	439.26			
SWPW-2	9/22/06 6:00	439.25			
SWPW-2	9/22/06 6:05	439.26			
SWPW-2	9/22/06 6:10	439.28			
SWPW-2	9/22/06 6:15	439.24			
SWPW-2	9/22/06 6:20	439.25			
SWPW-2	9/22/06 6:25	439.25			
SWPW-2	9/22/06 6:30	439.24			
SWPW-2	9/22/06 6:35	439.27			
SWPW-2	9/22/06 6:40	439.27			
SWPW-2	9/22/06 6:45	439.23			
SWPW-2	9/22/06 6:50	439.23			
SWPW-2	9/22/06 6:55	439.23			
SWPW-2	9/22/06 7:00	439.22			
SWPW-2	9/22/06 7:05	439.26			
SWPW-2	9/22/06 7:10	439.23			
SWPW-2	9/22/06 7:15	439.22			
SWPW-2	9/22/06 7:20	439.23			
SWPW-2	9/22/06 7:25	439.23			
SWPW-2	9/22/06 7:30	439.22			
SWPW-2	9/22/06 7:35	439.23			
SWPW-2	9/22/06 7:40	439.22			
SWPW-2	9/22/06 7:45	439.22			
SWPW-2	9/22/06 7:50	439.22			
SWPW-2	9/22/06 7:55	439.22			
SWPW-2	9/22/06 8:00	439.20			
SWPW-2	9/22/06 8:05	439.22			
SWPW-2	9/22/06 8:10	439.22			
SWPW-2	9/22/06 8:15	439.21			
SWPW-2	9/22/06 8:20	439.20			
SWPW-2	9/22/06 8:25	439.22			
SWPW-2	9/22/06 8:30	439.22			
SWPW-2	9/22/06 8:35	439.21			
SWPW-2	9/22/06 8:40	439.20			
SWPW-2	9/22/06 8:45	439.21			
SWPW-2	9/22/06 8:50	439.18			
SWPW-2	9/22/06 8:55	439.19			
SWPW-2	9/22/06 9:00	439.17			
SWPW-2	9/22/06 9:05	439.20			
SWPW-2	9/22/06 9:10	439.23			
SWPW-2	9/22/06 9:15	439.19			
SWPW-2	9/22/06 9:20	439.19			
SWPW-2	9/22/06 9:25	439.18			
SWPW-2	9/22/06 9:30	439.18			
SWPW-2	9/22/06 9:35	439.17			
SWPW-2	9/22/06 9:40	439.17			
SWPW-2	9/22/06 9:45	439.17			
SWPW-2	9/22/06 9:50	439.18			
SWPW-2	9/22/06 9:55	439.18			
SWPW-2	9/22/06 10:00	439.17			
SWPW-2	9/22/06 10:05	439.18			
SWPW-2	9/22/06 10:10	439.17			
SWPW-2	9/22/06 10:15	439.19			
SWPW-2	9/22/06 10:20	439.18			
SWPW-2	9/22/06 10:25	439.16			
SWPW-2	9/22/06 10:30	439.16			
SWPW-2	9/22/06 10:35	439.17			
SWPW-2	9/22/06 10:40	439.18			
SWPW-2	9/22/06 10:45	439.18			
SWPW-2	9/22/06 10:50	439.18			
SWPW-2	9/22/06 10:55	439.19			
SWPW-2	9/22/06 11:00	439.19			
SWPW-2	9/22/06 11:05	439.17			
SWPW-2	9/22/06 11:10	439.19			
SWPW-2	9/22/06 11:15	439.18			
SWPW-2	9/22/06 11:20	439.18			
SWPW-2	9/22/06 11:25	439.18			
SWPW-2	9/22/06 11:30	439.19			
SWPW-2	9/22/06 11:35	439.17			
SWPW-2	9/22/06 11:40	439.18			
SWPW-2	9/22/06 11:45	439.17			
SWPW-2	9/22/06 11:50	439.17			
SWPW-2	9/22/06 11:55	439.17			
SWPW-2	9/22/06 12:00	439.16			
SWPW-2	9/22/06 12:05	439.17			
SWPW-2	9/22/06 12:10	439.16			
SWPW-2	9/22/06 12:15	439.18			
SWPW-2	9/22/06 12:20	439.16			
SWPW-2	9/22/06 12:25	439.14			
SWPW-2	9/22/06 12:30	439.13			
SWPW-2	9/22/06 12:35	439.15			
SWPW-2	9/22/06 12:40	439.14			
SWPW-2	9/22/06 12:45	439.17			
SWPW-2	9/22/06 12:50	439.19			
SWPW-2	9/22/06 12:55	439.16			
SWPW-2	9/22/06 13:00	439.18			
SWPW-2	9/22/06 13:05	439.13			
SWPW-2	9/22/06 13:10	439.13			
SWPW-2	9/22/06 13:15	439.17			
SWPW-2	9/22/06 13:20	439.12			
SWPW-2	9/22/06 13:25	439.11			
SWPW-2	9/22/06 13:30	439.15			
SWPW-2	9/22/06 13:35	439.12			
SWPW-2	9/22/06 13:40	439.13			
SWPW-2	9/22/06 13:45	439.15			
SWPW-2	9/22/06 13:50	439.15			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/22/06 13:55	439.12			
SWPW-2	9/22/06 14:00	439.10			
SWPW-2	9/22/06 14:05	439.11			
SWPW-2	9/22/06 14:10	439.14			
SWPW-2	9/22/06 14:15	439.10			
SWPW-2	9/22/06 14:20	439.13			
SWPW-2	9/22/06 14:25	439.10			
SWPW-2	9/22/06 14:30	439.09			
SWPW-2	9/22/06 14:35	439.09			
SWPW-2	9/22/06 14:40	439.09			
SWPW-2	9/22/06 14:45	439.09			
SWPW-2	9/22/06 14:50	439.14			
SWPW-2	9/22/06 14:55	439.12			
SWPW-2	9/22/06 15:00	439.11			
SWPW-2	9/22/06 15:05	439.09			
SWPW-2	9/22/06 15:10	439.12			
SWPW-2	9/22/06 15:15	439.10			
SWPW-2	9/22/06 15:20	439.11			
SWPW-2	9/22/06 15:25	439.07			
SWPW-2	9/22/06 15:30	439.11			
SWPW-2	9/22/06 15:35	439.10			
SWPW-2	9/22/06 15:40	439.08			
SWPW-2	9/22/06 15:45	439.10			
SWPW-2	9/22/06 15:50	439.07			
SWPW-2	9/22/06 15:55	439.07			
SWPW-2	9/22/06 16:00	439.10			
SWPW-2	9/22/06 16:05	439.10			
SWPW-2	9/22/06 16:10	439.05			
SWPW-2	9/22/06 16:15	439.06			
SWPW-2	9/22/06 16:20	439.08			
SWPW-2	9/22/06 16:25	439.04			
SWPW-2	9/22/06 16:30	439.05			
SWPW-2	9/22/06 16:35	439.05			
SWPW-2	9/22/06 16:40	439.04			
SWPW-2	9/22/06 16:45	439.04			
SWPW-2	9/22/06 16:50	439.04			
SWPW-2	9/22/06 16:55	439.03			
SWPW-2	9/22/06 17:00	439.04			
SWPW-2	9/22/06 17:05	439.02			
SWPW-2	9/22/06 17:10	439.02			
SWPW-2	9/22/06 17:15	439.02			
SWPW-2	9/22/06 17:20	439.02			
SWPW-2	9/22/06 17:25	439.02			
SWPW-2	9/22/06 17:30	439.01			
SWPW-2	9/22/06 17:35	439.06			
SWPW-2	9/22/06 17:40	439.02			
SWPW-2	9/22/06 17:45	439.01			
SWPW-2	9/22/06 17:50	439.03			
SWPW-2	9/22/06 17:55	439.03			
SWPW-2	9/22/06 18:00	439.04			
SWPW-2	9/22/06 18:05	439.03			
SWPW-2	9/22/06 18:10	438.99			
SWPW-2	9/22/06 18:15	438.99			
SWPW-2	9/22/06 18:20	439.03			
SWPW-2	9/22/06 18:25	439.03			
SWPW-2	9/22/06 18:30	439.02			
SWPW-2	9/22/06 18:35	439.03			
SWPW-2	9/22/06 18:40	439.00			
SWPW-2	9/22/06 18:45	438.99			
SWPW-2	9/22/06 18:50	439.00			
SWPW-2	9/22/06 18:55	439.01			
SWPW-2	9/22/06 19:00	439.00			
SWPW-2	9/22/06 19:05	439.01			
SWPW-2	9/22/06 19:10	438.99			
SWPW-2	9/22/06 19:15	438.99			
SWPW-2	9/22/06 19:20	438.99			
SWPW-2	9/22/06 19:25	438.99			
SWPW-2	9/22/06 19:30	438.97			
SWPW-2	9/22/06 19:35	439.01			
SWPW-2	9/22/06 19:40	439.02			
SWPW-2	9/22/06 19:45	438.96			
SWPW-2	9/22/06 19:50	439.00			
SWPW-2	9/22/06 19:55	439.00			
SWPW-2	9/22/06 20:00	438.99			
SWPW-2	9/22/06 20:05	438.99			
SWPW-2	9/22/06 20:10	438.99			
SWPW-2	9/22/06 20:15	439.00			
SWPW-2	9/22/06 20:20	438.95			
SWPW-2	9/22/06 20:25	438.95			
SWPW-2	9/22/06 20:30	438.96			
SWPW-2	9/22/06 20:35	438.99			
SWPW-2	9/22/06 20:40	438.99			
SWPW-2	9/22/06 20:45	438.98			
SWPW-2	9/22/06 20:50	438.95			
SWPW-2	9/22/06 20:55	438.98			
SWPW-2	9/22/06 21:00	438.94			
SWPW-2	9/22/06 21:05	438.98			
SWPW-2	9/22/06 21:10	438.95			
SWPW-2	9/22/06 21:15	438.96			
SWPW-2	9/22/06 21:20	438.98			
SWPW-2	9/22/06 21:25	438.98			
SWPW-2	9/22/06 21:30	438.95			
SWPW-2	9/22/06 21:35	438.95			
SWPW-2	9/22/06 21:40	438.95			
SWPW-2	9/22/06 21:45	438.98			
SWPW-2	9/22/06 21:50	438.95			
SWPW-2	9/22/06 21:55	438.96			
SWPW-2	9/22/06 22:00	438.98			
SWPW-2	9/22/06 22:05	438.98			
SWPW-2	9/22/06 22:10	438.94			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/22/06 22:15	438.94			
SWPW-2	9/22/06 22:20	438.94			
SWPW-2	9/22/06 22:25	438.93			
SWPW-2	9/22/06 22:30	438.94			
SWPW-2	9/22/06 22:35	438.94			
SWPW-2	9/22/06 22:40	438.93			
SWPW-2	9/22/06 22:45	438.94			
SWPW-2	9/22/06 22:50	438.93			
SWPW-2	9/22/06 22:55	438.93			
SWPW-2	9/22/06 23:00	438.93			
SWPW-2	9/22/06 23:05	438.95			
SWPW-2	9/22/06 23:10	438.93			
SWPW-2	9/22/06 23:15	438.93			
SWPW-2	9/22/06 23:20	438.93			
SWPW-2	9/22/06 23:25	438.93			
SWPW-2	9/22/06 23:30	438.93			
SWPW-2	9/22/06 23:35	438.92			
SWPW-2	9/22/06 23:40	438.92			
SWPW-2	9/22/06 23:45	438.95			
SWPW-2	9/22/06 23:50	438.92			
SWPW-2	9/22/06 23:55	438.91			
SWPW-2	9/23/06 0:00	438.90			
SWPW-2	9/23/06 0:05	438.92			
SWPW-2	9/23/06 0:10	438.91			
SWPW-2	9/23/06 0:15	438.92			
SWPW-2	9/23/06 0:20	438.95			
SWPW-2	9/23/06 0:25	438.91			
SWPW-2	9/23/06 0:30	438.91			
SWPW-2	9/23/06 0:35	438.90			
SWPW-2	9/23/06 0:40	438.93			
SWPW-2	9/23/06 0:45	438.93			
SWPW-2	9/23/06 0:50	438.93			
SWPW-2	9/23/06 0:55	438.92			
SWPW-2	9/23/06 1:00	438.92			
SWPW-2	9/23/06 1:05	438.93			
SWPW-2	9/23/06 1:10	438.93			
SWPW-2	9/23/06 1:15	438.88			
SWPW-2	9/23/06 1:20	438.92			
SWPW-2	9/23/06 1:25	438.90			
SWPW-2	9/23/06 1:30	438.88			
SWPW-2	9/23/06 1:35	438.90			
SWPW-2	9/23/06 1:40	438.87			
SWPW-2	9/23/06 1:45	438.87			
SWPW-2	9/23/06 1:50	438.90			
SWPW-2	9/23/06 1:55	438.87			
SWPW-2	9/23/06 2:00	438.89			
SWPW-2	9/23/06 2:05	438.86			
SWPW-2	9/23/06 2:10	438.89			
SWPW-2	9/23/06 2:15	438.84			
SWPW-2	9/23/06 2:20	438.89			
SWPW-2	9/23/06 2:25	438.88			
SWPW-2	9/23/06 2:30	438.89			
SWPW-2	9/23/06 2:35	438.87			
SWPW-2	9/23/06 2:40	438.87			
SWPW-2	9/23/06 2:45	438.87			
SWPW-2	9/23/06 2:50	438.86			
SWPW-2	9/23/06 2:55	438.89			
SWPW-2	9/23/06 3:00	438.86			
SWPW-2	9/23/06 3:05	438.86			
SWPW-2	9/23/06 3:10	438.86			
SWPW-2	9/23/06 3:15	438.84			
SWPW-2	9/23/06 3:20	438.84			
SWPW-2	9/23/06 3:25	438.84			
SWPW-2	9/23/06 3:30	438.84			
SWPW-2	9/23/06 3:35	438.83			
SWPW-2	9/23/06 3:40	438.84			
SWPW-2	9/23/06 3:45	438.82			
SWPW-2	9/23/06 3:50	438.82			
SWPW-2	9/23/06 3:55	438.82			
SWPW-2	9/23/06 4:00	438.82			
SWPW-2	9/23/06 4:05	438.80			
SWPW-2	9/23/06 4:10	438.84			
SWPW-2	9/23/06 4:15	438.80			
SWPW-2	9/23/06 4:20	438.81			
SWPW-2	9/23/06 4:25	438.80			
SWPW-2	9/23/06 4:30	438.84			
SWPW-2	9/23/06 4:35	438.81			
SWPW-2	9/23/06 4:40	438.80			
SWPW-2	9/23/06 4:45	438.80			
SWPW-2	9/23/06 4:50	438.83			
SWPW-2	9/23/06 4:55	438.82			
SWPW-2	9/23/06 5:00	438.81			
SWPW-2	9/23/06 5:05	438.79			
SWPW-2	9/23/06 5:10	438.80			
SWPW-2	9/23/06 5:15	438.79			
SWPW-2	9/23/06 5:20	438.80			
SWPW-2	9/23/06 5:25	438.79			
SWPW-2	9/23/06 5:30	438.79			
SWPW-2	9/23/06 5:35	438.79			
SWPW-2	9/23/06 5:40	438.75			
SWPW-2	9/23/06 5:45	438.80			
SWPW-2	9/23/06 5:50	438.76			
SWPW-2	9/23/06 5:55	438.80			
SWPW-2	9/23/06 6:00	438.76			
SWPW-2	9/23/06 6:05	438.75			
SWPW-2	9/23/06 6:10	438.76			
SWPW-2	9/23/06 6:15	438.77			
SWPW-2	9/23/06 6:20	438.76			
SWPW-2	9/23/06 6:25	438.77			
SWPW-2	9/23/06 6:30	438.76			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/23/06 6:35	438.76			
SWPW-2	9/23/06 6:40	438.76			
SWPW-2	9/23/06 6:45	438.76			
SWPW-2	9/23/06 6:50	438.76			
SWPW-2	9/23/06 6:55	438.75			
SWPW-2	9/23/06 7:00	438.76			
SWPW-2	9/23/06 7:05	438.76			
SWPW-2	9/23/06 7:10	438.77			
SWPW-2	9/23/06 7:15	438.77			
SWPW-2	9/23/06 7:20	438.76			
SWPW-2	9/23/06 7:25	438.75			
SWPW-2	9/23/06 7:30	438.73			
SWPW-2	9/23/06 7:35	438.75			
SWPW-2	9/23/06 7:40	438.76			
SWPW-2	9/23/06 7:45	438.76			
SWPW-2	9/23/06 7:50	438.76			
SWPW-2	9/23/06 7:55	438.72			
SWPW-2	9/23/06 8:00	438.73			
SWPW-2	9/23/06 8:05	438.75			
SWPW-2	9/23/06 8:10	438.72			
SWPW-2	9/23/06 8:15	438.75			
SWPW-2	9/23/06 8:20	438.76			
SWPW-2	9/23/06 8:25	438.75			
SWPW-2	9/23/06 8:30	438.75			
SWPW-2	9/23/06 8:35	438.74			
SWPW-2	9/23/06 8:40	438.72			
SWPW-2	9/23/06 8:45	438.74			
SWPW-2	9/23/06 8:50	438.75			
SWPW-2	9/23/06 8:55	438.73			
SWPW-2	9/23/06 9:00	438.72			
SWPW-2	9/23/06 9:05	438.72			
SWPW-2	9/23/06 9:10	438.78			
SWPW-2	9/23/06 9:15	438.75			
SWPW-2	9/23/06 9:20	438.71			
SWPW-2	9/23/06 9:25	438.73			
SWPW-2	9/23/06 9:30	438.75			
SWPW-2	9/23/06 9:35	438.72			
SWPW-2	9/23/06 9:40	438.76			
SWPW-2	9/23/06 9:45	438.74			
SWPW-2	9/23/06 9:50	438.75			
SWPW-2	9/23/06 9:55	438.74			
SWPW-2	9/23/06 10:00	438.71			
SWPW-2	9/23/06 10:05	438.70			
SWPW-2	9/23/06 10:10	438.75			
SWPW-2	9/23/06 10:15	438.74			
SWPW-2	9/23/06 10:20	438.74			
SWPW-2	9/23/06 10:25	438.74			
SWPW-2	9/23/06 10:30	438.74			
SWPW-2	9/23/06 10:35	438.75			
SWPW-2	9/23/06 10:40	438.75			
SWPW-2	9/23/06 10:45	438.74			
SWPW-2	9/23/06 10:50	438.74			
SWPW-2	9/23/06 10:55	438.75			
SWPW-2	9/23/06 11:00	438.76			
SWPW-2	9/23/06 11:05	438.73			
SWPW-2	9/23/06 11:10	438.71			
SWPW-2	9/23/06 11:15	438.71			
SWPW-2	9/23/06 11:20	438.75			
SWPW-2	9/23/06 11:25	438.75			
SWPW-2	9/23/06 11:30	438.72			
SWPW-2	9/23/06 11:35	438.71			
SWPW-2	9/23/06 11:40	438.76			
SWPW-2	9/23/06 11:45	438.73			
SWPW-2	9/23/06 11:50	438.71			
SWPW-2	9/23/06 11:55	438.72			
SWPW-2	9/23/06 12:00	438.72			
SWPW-2	9/23/06 12:05	438.72			
SWPW-2	9/23/06 12:10	438.72			
SWPW-2	9/23/06 12:15	438.72			
SWPW-2	9/23/06 12:20	438.76			
SWPW-2	9/23/06 12:25	438.72			
SWPW-2	9/23/06 12:30	438.71			
SWPW-2	9/23/06 12:35	438.70			
SWPW-2	9/23/06 12:40	438.70			
SWPW-2	9/23/06 12:45	438.72			
SWPW-2	9/23/06 12:50	438.71			
SWPW-2	9/23/06 12:55	438.71			
SWPW-2	9/23/06 13:00	438.70			
SWPW-2	9/23/06 13:05	438.71			
SWPW-2	9/23/06 13:10	438.70			
SWPW-2	9/23/06 13:15	438.70			
SWPW-2	9/23/06 13:20	438.69			
SWPW-2	9/23/06 13:25	438.72			
SWPW-2	9/23/06 13:30	438.69			
SWPW-2	9/23/06 13:35	438.72			
SWPW-2	9/23/06 13:40	438.72			
SWPW-2	9/23/06 13:45	438.73			
SWPW-2	9/23/06 13:50	438.67			
SWPW-2	9/23/06 13:55	438.71			
SWPW-2	9/23/06 14:00	438.71			
SWPW-2	9/23/06 14:05	438.70			
SWPW-2	9/23/06 14:10	438.70			
SWPW-2	9/23/06 14:15	438.66			
SWPW-2	9/23/06 14:20	438.70			
SWPW-2	9/23/06 14:25	438.68			
SWPW-2	9/23/06 14:30	438.66			
SWPW-2	9/23/06 14:35	438.69			
SWPW-2	9/23/06 14:40	438.68			
SWPW-2	9/23/06 14:45	438.68			
SWPW-2	9/23/06 14:50	438.65			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/23/06 14:55	438.65			
SWPW-2	9/23/06 15:00	438.68			
SWPW-2	9/23/06 15:05	438.66			
SWPW-2	9/23/06 15:10	438.67			
SWPW-2	9/23/06 15:15	438.67			
SWPW-2	9/23/06 15:20	438.67			
SWPW-2	9/23/06 15:25	438.66			
SWPW-2	9/23/06 15:30	438.66			
SWPW-2	9/23/06 15:35	438.67			
SWPW-2	9/23/06 15:40	438.66			
SWPW-2	9/23/06 15:45	438.61			
SWPW-2	9/23/06 15:50	438.60			
SWPW-2	9/23/06 15:55	438.64			
SWPW-2	9/23/06 16:00	438.65			
SWPW-2	9/23/06 16:05	438.61			
SWPW-2	9/23/06 16:10	438.61			
SWPW-2	9/23/06 16:15	438.60			
SWPW-2	9/23/06 16:20	438.61			
SWPW-2	9/23/06 16:25	438.63			
SWPW-2	9/23/06 16:30	438.59			
SWPW-2	9/23/06 16:35	438.64			
SWPW-2	9/23/06 16:40	438.63			
SWPW-2	9/23/06 16:45	438.62			
SWPW-2	9/23/06 16:50	438.62			
SWPW-2	9/23/06 16:55	438.58			
SWPW-2	9/23/06 17:00	438.62			
SWPW-2	9/23/06 17:05	438.61			
SWPW-2	9/23/06 17:10	438.61			
SWPW-2	9/23/06 17:15	438.61			
SWPW-2	9/23/06 17:20	438.61			
SWPW-2	9/23/06 17:25	438.61			
SWPW-2	9/23/06 17:30	438.60			
SWPW-2	9/23/06 17:35	438.60			
SWPW-2	9/23/06 17:40	438.60			
SWPW-2	9/23/06 17:45	438.57			
SWPW-2	9/23/06 17:50	438.60			
SWPW-2	9/23/06 17:55	438.57			
SWPW-2	9/23/06 18:00	438.59			
SWPW-2	9/23/06 18:05	438.56			
SWPW-2	9/23/06 18:10	438.59			
SWPW-2	9/23/06 18:15	438.59			
SWPW-2	9/23/06 18:20	438.55			
SWPW-2	9/23/06 18:25	438.55			
SWPW-2	9/23/06 18:30	438.55			
SWPW-2	9/23/06 18:35	438.54			
SWPW-2	9/23/06 18:40	438.55			
SWPW-2	9/23/06 18:45	438.55			
SWPW-2	9/23/06 18:50	438.54			
SWPW-2	9/23/06 18:55	438.54			
SWPW-2	9/23/06 19:00	438.53			
SWPW-2	9/23/06 19:05	438.54			
SWPW-2	9/23/06 19:10	438.54			
SWPW-2	9/23/06 19:15	438.58			
SWPW-2	9/23/06 19:20	438.54			
SWPW-2	9/23/06 19:25	438.54			
SWPW-2	9/23/06 19:30	438.54			
SWPW-2	9/23/06 19:35	438.54			
SWPW-2	9/23/06 19:40	438.52			
SWPW-2	9/23/06 19:45	438.53			
SWPW-2	9/23/06 19:50	438.53			
SWPW-2	9/23/06 19:55	438.52			
SWPW-2	9/23/06 20:00	438.53			
SWPW-2	9/23/06 20:05	438.53			
SWPW-2	9/23/06 20:10	438.52			
SWPW-2	9/23/06 20:15	438.55			
SWPW-2	9/23/06 20:20	438.52			
SWPW-2	9/23/06 20:25	438.51			
SWPW-2	9/23/06 20:30	438.55			
SWPW-2	9/23/06 20:35	438.51			
SWPW-2	9/23/06 20:40	438.51			
SWPW-2	9/23/06 20:45	438.54			
SWPW-2	9/23/06 20:50	438.54			
SWPW-2	9/23/06 20:55	438.52			
SWPW-2	9/23/06 21:00	438.55			
SWPW-2	9/23/06 21:05	438.54			
SWPW-2	9/23/06 21:10	438.52			
SWPW-2	9/23/06 21:15	438.51			
SWPW-2	9/23/06 21:20	438.51			
SWPW-2	9/23/06 21:25	438.51			
SWPW-2	9/23/06 21:30	438.51			
SWPW-2	9/23/06 21:35	438.52			
SWPW-2	9/23/06 21:40	438.51			
SWPW-2	9/23/06 21:45	438.51			
SWPW-2	9/23/06 21:50	438.51			
SWPW-2	9/23/06 21:55	438.50			
SWPW-2	9/23/06 22:00	438.51			
SWPW-2	9/23/06 22:05	438.51			
SWPW-2	9/23/06 22:10	438.49			
SWPW-2	9/23/06 22:15	438.50			
SWPW-2	9/23/06 22:20	438.49			
SWPW-2	9/23/06 22:25	438.48			
SWPW-2	9/23/06 22:30	438.50			
SWPW-2	9/23/06 22:35	438.54			
SWPW-2	9/23/06 22:40	438.49			
SWPW-2	9/23/06 22:45	438.53			
SWPW-2	9/23/06 22:50	438.50			
SWPW-2	9/23/06 22:55	438.52			
SWPW-2	9/23/06 23:00	438.53			
SWPW-2	9/23/06 23:05	438.49			
SWPW-2	9/23/06 23:10	438.49			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/23/06 23:15	438.50			
SWPW-2	9/23/06 23:20	438.48			
SWPW-2	9/23/06 23:25	438.49			
SWPW-2	9/23/06 23:30	438.50			
SWPW-2	9/23/06 23:35	438.49			
SWPW-2	9/23/06 23:40	438.51			
SWPW-2	9/23/06 23:45	438.50			
SWPW-2	9/23/06 23:50	438.51			
SWPW-2	9/23/06 23:55	438.46			
SWPW-2	9/24/06 0:00	438.51			
SWPW-2	9/24/06 0:05	438.50			
SWPW-2	9/24/06 0:10	438.47			
SWPW-2	9/24/06 0:15	438.51			
SWPW-2	9/24/06 0:20	438.46			
SWPW-2	9/24/06 0:25	438.45			
SWPW-2	9/24/06 0:30	438.50			
SWPW-2	9/24/06 0:35	438.46			
SWPW-2	9/24/06 0:40	438.46			
SWPW-2	9/24/06 0:45	438.50			
SWPW-2	9/24/06 0:50	438.48			
SWPW-2	9/24/06 0:55	438.48			
SWPW-2	9/24/06 1:00	438.49			
SWPW-2	9/24/06 1:05	438.48			
SWPW-2	9/24/06 1:10	438.46			
SWPW-2	9/24/06 1:15	438.47			
SWPW-2	9/24/06 1:20	438.47			
SWPW-2	9/24/06 1:25	438.50			
SWPW-2	9/24/06 1:30	438.46			
SWPW-2	9/24/06 1:35	438.46			
SWPW-2	9/24/06 1:40	438.46			
SWPW-2	9/24/06 1:45	438.45			
SWPW-2	9/24/06 1:50	438.45			
SWPW-2	9/24/06 1:55	438.45			
SWPW-2	9/24/06 2:00	438.45			
SWPW-2	9/24/06 2:05	438.48			
SWPW-2	9/24/06 2:10	438.45			
SWPW-2	9/24/06 2:15	438.45			
SWPW-2	9/24/06 2:20	438.44			
SWPW-2	9/24/06 2:25	438.45			
SWPW-2	9/24/06 2:30	438.44			
SWPW-2	9/24/06 2:35	438.44			
SWPW-2	9/24/06 2:40	438.45			
SWPW-2	9/24/06 2:45	438.40			
SWPW-2	9/24/06 2:50	438.45			
SWPW-2	9/24/06 2:55	438.44			
SWPW-2	9/24/06 3:00	438.44			
SWPW-2	9/24/06 3:05	438.40			
SWPW-2	9/24/06 3:10	438.40			
SWPW-2	9/24/06 3:15	438.44			
SWPW-2	9/24/06 3:20	438.41			
SWPW-2	9/24/06 3:25	438.44			
SWPW-2	9/24/06 3:30	438.40			
SWPW-2	9/24/06 3:35	438.40			
SWPW-2	9/24/06 3:40	438.42			
SWPW-2	9/24/06 3:45	438.42			
SWPW-2	9/24/06 3:50	438.40			
SWPW-2	9/24/06 3:55	438.40			
SWPW-2	9/24/06 4:00	438.41			
SWPW-2	9/24/06 4:05	438.40			
SWPW-2	9/24/06 4:10	438.40			
SWPW-2	9/24/06 4:15	438.39			
SWPW-2	9/24/06 4:20	438.39			
SWPW-2	9/24/06 4:25	438.38			
SWPW-2	9/24/06 4:30	438.37			
SWPW-2	9/24/06 4:35	438.37			
SWPW-2	9/24/06 4:40	438.37			
SWPW-2	9/24/06 4:45	438.39			
SWPW-2	9/24/06 4:50	438.38			
SWPW-2	9/24/06 4:55	438.37			
SWPW-2	9/24/06 5:00	438.38			
SWPW-2	9/24/06 5:05	438.37			
SWPW-2	9/24/06 5:10	438.37			
SWPW-2	9/24/06 5:15	438.37			
SWPW-2	9/24/06 5:20	438.37			
SWPW-2	9/24/06 5:25	438.35			
SWPW-2	9/24/06 5:30	438.38			
SWPW-2	9/24/06 5:35	438.38			
SWPW-2	9/24/06 5:40	438.34			
SWPW-2	9/24/06 5:45	438.34			
SWPW-2	9/24/06 5:50	438.33			
SWPW-2	9/24/06 5:55	438.33			
SWPW-2	9/24/06 6:00	438.32			
SWPW-2	9/24/06 6:05	438.33			
SWPW-2	9/24/06 6:10	438.32			
SWPW-2	9/24/06 6:15	438.35			
SWPW-2	9/24/06 6:20	438.31			
SWPW-2	9/24/06 6:25	438.31			
SWPW-2	9/24/06 6:30	438.31			
SWPW-2	9/24/06 6:35	438.31			
SWPW-2	9/24/06 6:40	438.32			
SWPW-2	9/24/06 6:45	438.30			
SWPW-2	9/24/06 6:50	438.31			
SWPW-2	9/24/06 6:55	438.31			
SWPW-2	9/24/06 7:00	438.30			
SWPW-2	9/24/06 7:05	438.31			
SWPW-2	9/24/06 7:10	438.31			
SWPW-2	9/24/06 7:15	438.30			
SWPW-2	9/24/06 7:20	438.31			
SWPW-2	9/24/06 7:25	438.31			
SWPW-2	9/24/06 7:30	438.29			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/24/06 7:35	438.30			
SWPW-2	9/24/06 7:40	438.31			
SWPW-2	9/24/06 7:45	438.30			
SWPW-2	9/24/06 7:50	438.30			
SWPW-2	9/24/06 7:55	438.30			
SWPW-2	9/24/06 8:00	438.30			
SWPW-2	9/24/06 8:05	438.30			
SWPW-2	9/24/06 8:10	438.30			
SWPW-2	9/24/06 8:15	438.29			
SWPW-2	9/24/06 8:20	438.29			
SWPW-2	9/24/06 8:25	438.28			
SWPW-2	9/24/06 8:30	438.29			
SWPW-2	9/24/06 8:35	438.27			
SWPW-2	9/24/06 8:40	438.30			
SWPW-2	9/24/06 8:45	438.31			
SWPW-2	9/24/06 8:50	438.29			
SWPW-2	9/24/06 8:55	438.27			
SWPW-2	9/24/06 9:00	438.27			
SWPW-2	9/24/06 9:05	438.28			
SWPW-2	9/24/06 9:10	438.28			
SWPW-2	9/24/06 9:15	438.27			
SWPW-2	9/24/06 9:20	438.27			
SWPW-2	9/24/06 9:25	438.27			
SWPW-2	9/24/06 9:30	438.27			
SWPW-2	9/24/06 9:35	438.27			
SWPW-2	9/24/06 9:40	438.27			
SWPW-2	9/24/06 9:45	438.28			
SWPW-2	9/24/06 9:50	438.28			
SWPW-2	9/24/06 9:55	438.27			
SWPW-2	9/24/06 10:00	438.28			
SWPW-2	9/24/06 10:05	438.30			
SWPW-2	9/24/06 10:10	438.28			
SWPW-2	9/24/06 10:15	438.27			
SWPW-2	9/24/06 10:20	438.27			
SWPW-2	9/24/06 10:25	438.27			
SWPW-2	9/24/06 10:30	438.25			
SWPW-2	9/24/06 10:35	438.26			
SWPW-2	9/24/06 10:40	438.24			
SWPW-2	9/24/06 10:45	438.27			
SWPW-2	9/24/06 10:50	438.27			
SWPW-2	9/24/06 10:55	438.25			
SWPW-2	9/24/06 11:00	438.27			
SWPW-2	9/24/06 11:05	438.28			
SWPW-2	9/24/06 11:10	438.28			
SWPW-2	9/24/06 11:15	438.25			
SWPW-2	9/24/06 11:20	438.23			
SWPW-2	9/24/06 11:25	438.27			
SWPW-2	9/24/06 11:30	438.26			
SWPW-2	9/24/06 11:35	438.26			
SWPW-2	9/24/06 11:40	438.23			
SWPW-2	9/24/06 11:45	438.26			
SWPW-2	9/24/06 11:50	438.26			
SWPW-2	9/24/06 11:55	438.26			
SWPW-2	9/24/06 12:00	438.26			
SWPW-2	9/24/06 12:05	438.25			
SWPW-2	9/24/06 12:10	438.23			
SWPW-2	9/24/06 12:15	438.25			
SWPW-2	9/24/06 12:20	438.25			
SWPW-2	9/24/06 12:25	438.24			
SWPW-2	9/24/06 12:30	438.24			
SWPW-2	9/24/06 12:35	438.24			
SWPW-2	9/24/06 12:40	438.24			
SWPW-2	9/24/06 12:45	438.24			
SWPW-2	9/24/06 12:50	438.24			
SWPW-2	9/24/06 12:55	438.26			
SWPW-2	9/24/06 13:00	438.21			
SWPW-2	9/24/06 13:05	438.22			
SWPW-2	9/24/06 13:10	438.22			
SWPW-2	9/24/06 13:15	438.22			
SWPW-2	9/24/06 13:20	438.22			
SWPW-2	9/24/06 13:25	438.21			
SWPW-2	9/24/06 13:30	438.20			
SWPW-2	9/24/06 13:35	438.20			
SWPW-2	9/24/06 13:40	438.22			
SWPW-2	9/24/06 13:45	438.20			
SWPW-2	9/24/06 13:50	438.20			
SWPW-2	9/24/06 13:55	438.20			
SWPW-2	9/24/06 14:00	438.20			
SWPW-2	9/24/06 14:05	438.20			
SWPW-2	9/24/06 14:10	438.19			
SWPW-2	9/24/06 14:15	438.19			
SWPW-2	9/24/06 14:20	438.19			
SWPW-2	9/24/06 14:25	438.18			
SWPW-2	9/24/06 14:30	438.19			
SWPW-2	9/24/06 14:35	438.18			
SWPW-2	9/24/06 14:40	438.18			
SWPW-2	9/24/06 14:45	438.18			
SWPW-2	9/24/06 14:50	438.17			
SWPW-2	9/24/06 14:55	438.17			
SWPW-2	9/24/06 15:00	438.17			
SWPW-2	9/24/06 15:05	438.17			
SWPW-2	9/24/06 15:10	438.16			
SWPW-2	9/24/06 15:15	438.17			
SWPW-2	9/24/06 15:20	438.18			
SWPW-2	9/24/06 15:25	438.18			
SWPW-2	9/24/06 15:30	438.16			
SWPW-2	9/24/06 15:35	438.16			
SWPW-2	9/24/06 15:40	438.19			
SWPW-2	9/24/06 15:45	438.16			
SWPW-2	9/24/06 15:50	438.15			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/24/06 15:55	438.16			
SWPW-2	9/24/06 16:00	438.15			
SWPW-2	9/24/06 16:05	438.15			
SWPW-2	9/24/06 16:10	438.14			
SWPW-2	9/24/06 16:15	438.14			
SWPW-2	9/24/06 16:20	438.15			
SWPW-2	9/24/06 16:25	438.14			
SWPW-2	9/24/06 16:30	438.13			
SWPW-2	9/24/06 16:35	438.13			
SWPW-2	9/24/06 16:40	438.13			
SWPW-2	9/24/06 16:45	438.17			
SWPW-2	9/24/06 16:50	438.13			
SWPW-2	9/24/06 16:55	438.12			
SWPW-2	9/24/06 17:00	438.13			
SWPW-2	9/24/06 17:05	438.12			
SWPW-2	9/24/06 17:10	438.11			
SWPW-2	9/24/06 17:15	438.14			
SWPW-2	9/24/06 17:20	438.10			
SWPW-2	9/24/06 17:25	438.09			
SWPW-2	9/24/06 17:30	438.10			
SWPW-2	9/24/06 17:35	438.12			
SWPW-2	9/24/06 17:40	438.09			
SWPW-2	9/24/06 17:45	438.10			
SWPW-2	9/24/06 17:50	438.09			
SWPW-2	9/24/06 17:55	438.09			
SWPW-2	9/24/06 18:00	438.09			
SWPW-2	9/24/06 18:05	438.08			
SWPW-2	9/24/06 18:10	438.08			
SWPW-2	9/24/06 18:15	438.12			
SWPW-2	9/24/06 18:20	438.09			
SWPW-2	9/24/06 18:25	438.08			
SWPW-2	9/24/06 18:30	438.08			
SWPW-2	9/24/06 18:35	438.08			
SWPW-2	9/24/06 18:40	438.09			
SWPW-2	9/24/06 18:45	438.08			
SWPW-2	9/24/06 18:50	438.08			
SWPW-2	9/24/06 18:55	438.07			
SWPW-2	9/24/06 19:00	438.07			
SWPW-2	9/24/06 19:05	438.07			
SWPW-2	9/24/06 19:10	438.08			
SWPW-2	9/24/06 19:15	438.08			
SWPW-2	9/24/06 19:20	438.08			
SWPW-2	9/24/06 19:25	438.07			
SWPW-2	9/24/06 19:30	438.07			
SWPW-2	9/24/06 19:35	438.07			
SWPW-2	9/24/06 19:40	438.03			
SWPW-2	9/24/06 19:45	438.07			
SWPW-2	9/24/06 19:50	438.08			
SWPW-2	9/24/06 19:55	438.08			
SWPW-2	9/24/06 20:00	438.04			
SWPW-2	9/24/06 20:05	438.07			
SWPW-2	9/24/06 20:10	438.08			
SWPW-2	9/24/06 20:15	438.03			
SWPW-2	9/24/06 20:20	438.08			
SWPW-2	9/24/06 20:25	438.08			
SWPW-2	9/24/06 20:30	438.04			
SWPW-2	9/24/06 20:35	438.05			
SWPW-2	9/24/06 20:40	438.05			
SWPW-2	9/24/06 20:45	438.05			
SWPW-2	9/24/06 20:50	438.06			
SWPW-2	9/24/06 20:55	438.05			
SWPW-2	9/24/06 21:00	438.05			
SWPW-2	9/24/06 21:05	438.05			
SWPW-2	9/24/06 21:10	438.05			
SWPW-2	9/24/06 21:15	438.05			
SWPW-2	9/24/06 21:20	438.05			
SWPW-2	9/24/06 21:25	438.06			
SWPW-2	9/24/06 21:30	438.08			
SWPW-2	9/24/06 21:35	438.05			
SWPW-2	9/24/06 21:40	438.08			
SWPW-2	9/24/06 21:45	438.07			
SWPW-2	9/24/06 21:50	438.07			
SWPW-2	9/24/06 21:55	438.07			
SWPW-2	9/24/06 22:00	438.03			
SWPW-2	9/24/06 22:05	438.07			
SWPW-2	9/24/06 22:10	438.06			
SWPW-2	9/24/06 22:15	438.06			
SWPW-2	9/24/06 22:20	438.06			
SWPW-2	9/24/06 22:25	438.05			
SWPW-2	9/24/06 22:30	438.05			
SWPW-2	9/24/06 22:35	438.05			
SWPW-2	9/24/06 22:40	438.06			
SWPW-2	9/24/06 22:45	438.06			
SWPW-2	9/24/06 22:50	438.06			
SWPW-2	9/24/06 22:55	438.05			
SWPW-2	9/24/06 23:00	438.05			
SWPW-2	9/24/06 23:05	438.05			
SWPW-2	9/24/06 23:10	438.05			
SWPW-2	9/24/06 23:15	438.06			
SWPW-2	9/24/06 23:20	438.05			
SWPW-2	9/24/06 23:25	438.05			
SWPW-2	9/24/06 23:30	438.05			
SWPW-2	9/24/06 23:35	438.02			
SWPW-2	9/24/06 23:40	438.03			
SWPW-2	9/24/06 23:45	438.07			
SWPW-2	9/24/06 23:50	438.06			
SWPW-2	9/24/06 23:55	438.04			
SWPW-2	9/25/06 0:00	438.02			
SWPW-2	9/25/06 0:05	438.03			
SWPW-2	9/25/06 0:10	438.04			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/25/06 0:15	438.06			
SWPW-2	9/25/06 0:20	438.02			
SWPW-2	9/25/06 0:25	438.06			
SWPW-2	9/25/06 0:30	438.02			
SWPW-2	9/25/06 0:35	438.07			
SWPW-2	9/25/06 0:40	438.02			
SWPW-2	9/25/06 0:45	438.02			
SWPW-2	9/25/06 0:50	438.02			
SWPW-2	9/25/06 0:55	438.05			
SWPW-2	9/25/06 1:00	438.05			
SWPW-2	9/25/06 1:05	438.04			
SWPW-2	9/25/06 1:10	438.04			
SWPW-2	9/25/06 1:15	437.99			
SWPW-2	9/25/06 1:20	438.04			
SWPW-2	9/25/06 1:25	438.03			
SWPW-2	9/25/06 1:30	438.03			
SWPW-2	9/25/06 1:35	438.03			
SWPW-2	9/25/06 1:40	438.04			
SWPW-2	9/25/06 1:45	438.02			
SWPW-2	9/25/06 1:50	438.02			
SWPW-2	9/25/06 1:55	438.02			
SWPW-2	9/25/06 2:00	438.02			
SWPW-2	9/25/06 2:05	438.02			
SWPW-2	9/25/06 2:10	438.02			
SWPW-2	9/25/06 2:15	438.01			
SWPW-2	9/25/06 2:20	438.00			
SWPW-2	9/25/06 2:25	438.01			
SWPW-2	9/25/06 2:30	438.05			
SWPW-2	9/25/06 2:35	438.00			
SWPW-2	9/25/06 2:40	438.00			
SWPW-2	9/25/06 2:45	438.00			
SWPW-2	9/25/06 2:50	438.00			
SWPW-2	9/25/06 2:55	438.00			
SWPW-2	9/25/06 3:00	437.99			
SWPW-2	9/25/06 3:05	437.99			
SWPW-2	9/25/06 3:10	437.99			
SWPW-2	9/25/06 3:15	437.98			
SWPW-2	9/25/06 3:20	437.98			
SWPW-2	9/25/06 3:25	437.98			
SWPW-2	9/25/06 3:30	437.98			
SWPW-2	9/25/06 3:35	437.96			
SWPW-2	9/25/06 3:40	438.00			
SWPW-2	9/25/06 3:45	437.98			
SWPW-2	9/25/06 3:50	437.99			
SWPW-2	9/25/06 3:55	437.99			
SWPW-2	9/25/06 4:00	437.97			
SWPW-2	9/25/06 4:05	437.98			
SWPW-2	9/25/06 4:10	437.95			
SWPW-2	9/25/06 4:15	437.98			
SWPW-2	9/25/06 4:20	437.97			
SWPW-2	9/25/06 4:25	437.96			
SWPW-2	9/25/06 4:30	437.97			
SWPW-2	9/25/06 4:35	437.97			
SWPW-2	9/25/06 4:40	437.97			
SWPW-2	9/25/06 4:45	437.93			
SWPW-2	9/25/06 4:50	437.96			
SWPW-2	9/25/06 4:55	437.93			
SWPW-2	9/25/06 5:00	437.96			
SWPW-2	9/25/06 5:05	437.95			
SWPW-2	9/25/06 5:10	437.94			
SWPW-2	9/25/06 5:15	437.95			
SWPW-2	9/25/06 5:20	437.94			
SWPW-2	9/25/06 5:25	437.94			
SWPW-2	9/25/06 5:30	437.93			
SWPW-2	9/25/06 5:35	437.93			
SWPW-2	9/25/06 5:40	437.93			
SWPW-2	9/25/06 5:45	437.93			
SWPW-2	9/25/06 5:50	437.96			
SWPW-2	9/25/06 5:55	437.93			
SWPW-2	9/25/06 6:00	437.92			
SWPW-2	9/25/06 6:05	437.93			
SWPW-2	9/25/06 6:10	437.91			
SWPW-2	9/25/06 6:15	437.92			
SWPW-2	9/25/06 6:20	437.90			
SWPW-2	9/25/06 6:25	437.92			
SWPW-2	9/25/06 6:30	437.91			
SWPW-2	9/25/06 6:35	437.94			
SWPW-2	9/25/06 6:40	437.91			
SWPW-2	9/25/06 6:45	437.89			
SWPW-2	9/25/06 6:50	437.91			
SWPW-2	9/25/06 6:55	437.90			
SWPW-2	9/25/06 7:00	437.90			
SWPW-2	9/25/06 7:05	437.92			
SWPW-2	9/25/06 7:10	437.89			
SWPW-2	9/25/06 7:15	437.90			
SWPW-2	9/25/06 7:20	437.90			
SWPW-2	9/25/06 7:25	437.90			
SWPW-2	9/25/06 7:30	437.88			
SWPW-2	9/25/06 7:35	437.90			
SWPW-2	9/25/06 7:40	437.85			
SWPW-2	9/25/06 7:45	437.90			
SWPW-2	9/25/06 7:50	437.90			
SWPW-2	9/25/06 7:55	437.91			
SWPW-2	9/25/06 8:00	437.86			
SWPW-2	9/25/06 8:05	437.90			
SWPW-2	9/25/06 8:10	437.90			
SWPW-2	9/25/06 8:15	437.89			
SWPW-2	9/25/06 8:20	437.89			
SWPW-2	9/25/06 8:25	437.88			
SWPW-2	9/25/06 8:30	437.85			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/25/06 8:35	437.89			
SWPW-2	9/25/06 8:40	437.88			
SWPW-2	9/25/06 8:45	437.89			
SWPW-2	9/25/06 8:50	437.84			
SWPW-2	9/25/06 8:55	437.85			
SWPW-2	9/25/06 9:00	437.81			
SWPW-2	9/25/06 9:05	437.87			
SWPW-2	9/25/06 9:10	437.88			
SWPW-2	9/25/06 9:15	437.87			
SWPW-2	9/25/06 9:20	437.87			
SWPW-2	9/25/06 9:25	437.88			
SWPW-2	9/25/06 9:30	437.87			
SWPW-2	9/25/06 9:35	437.86			
SWPW-2	9/25/06 9:40	437.86			
SWPW-2	9/25/06 9:45	437.83			
SWPW-2	9/25/06 9:50	437.87			
SWPW-2	9/25/06 9:55	437.86			
SWPW-2	9/25/06 10:00	437.86			
SWPW-2	9/25/06 10:05	437.86			
SWPW-2	9/25/06 10:10	437.85			
SWPW-2	9/25/06 10:15	437.85			
SWPW-2	9/25/06 10:20	437.84			
SWPW-2	9/25/06 10:25	437.85			
SWPW-2	9/25/06 10:30	437.85			
SWPW-2	9/25/06 10:35	437.85			
SWPW-2	9/25/06 10:40	437.84			
SWPW-2	9/25/06 10:45	437.85			
SWPW-2	9/25/06 10:50	437.87			
SWPW-2	9/25/06 10:55	437.84			
SWPW-2	9/25/06 11:00	437.84			
SWPW-2	9/25/06 11:05	437.84			
SWPW-2	9/25/06 11:10	437.83			
SWPW-2	9/25/06 11:15	437.84			
SWPW-2	9/25/06 11:20	437.85			
SWPW-2	9/25/06 11:25	437.84			
SWPW-2	9/25/06 11:30	437.83			
SWPW-2	9/25/06 11:35	437.83			
SWPW-2	9/25/06 11:40	437.83			
SWPW-2	9/25/06 11:45	437.84			
SWPW-2	9/25/06 11:50	437.83			
SWPW-2	9/25/06 11:55	437.83			
SWPW-2	9/25/06 12:00	437.83			
SWPW-2	9/25/06 12:05	437.83			
SWPW-2	9/25/06 12:10	437.82			
SWPW-2	9/25/06 12:15	437.79			
SWPW-2	9/25/06 12:20	437.83			
SWPW-2	9/25/06 12:25	437.83			
SWPW-2	9/25/06 12:30	437.82			
SWPW-2	9/25/06 12:35	437.82			
SWPW-2	9/25/06 12:40	437.82			
SWPW-2	9/25/06 12:45	437.83			
SWPW-2	9/25/06 12:50	437.82			
SWPW-2	9/25/06 12:55	437.82			
SWPW-2	9/25/06 13:00	437.82			
SWPW-2	9/25/06 13:05	437.81			
SWPW-2	9/25/06 13:10	437.81			
SWPW-2	9/25/06 13:15	437.81			
SWPW-2	9/25/06 13:20	437.81			
SWPW-2	9/25/06 13:25	437.81			
SWPW-2	9/25/06 13:30	437.81			
SWPW-2	9/25/06 13:35	437.80			
SWPW-2	9/25/06 13:40	437.80			
SWPW-2	9/25/06 13:45	437.80			
SWPW-2	9/25/06 13:50	437.81			
SWPW-2	9/25/06 13:55	437.76			
SWPW-2	9/25/06 14:00	437.79			
SWPW-2	9/25/06 14:05	437.79			
SWPW-2	9/25/06 14:10	437.80			
SWPW-2	9/25/06 14:15	437.79			
SWPW-2	9/25/06 14:20	437.78			
SWPW-2	9/25/06 14:25	437.78			
SWPW-2	9/25/06 14:30	437.79			
SWPW-2	9/25/06 14:35	437.78			
SWPW-2	9/25/06 14:40	437.79			
SWPW-2	9/25/06 14:45	437.78			
SWPW-2	9/25/06 14:50	437.79			
SWPW-2	9/25/06 14:55	437.78			
SWPW-2	9/25/06 15:00	437.77			
SWPW-2	9/25/06 15:05	437.77			
SWPW-2	9/25/06 15:10	437.75			
SWPW-2	9/25/06 15:15	437.74			
SWPW-2	9/25/06 15:20	437.77			
SWPW-2	9/25/06 15:25	437.74			
SWPW-2	9/25/06 15:30	437.74			
SWPW-2	9/25/06 15:35	437.75			
SWPW-2	9/25/06 15:40	437.77			
SWPW-2	9/25/06 15:45	437.73			
SWPW-2	9/25/06 15:50	437.73			
SWPW-2	9/25/06 15:55	437.77			
SWPW-2	9/25/06 16:00	437.73			
SWPW-2	9/25/06 16:05	437.74			
SWPW-2	9/25/06 16:10	437.73			
SWPW-2	9/25/06 16:15	437.72			
SWPW-2	9/25/06 16:20	437.73			
SWPW-2	9/25/06 16:25	437.73			
SWPW-2	9/25/06 16:30	437.74			
SWPW-2	9/25/06 16:35	437.72			
SWPW-2	9/25/06 16:40	437.73			
SWPW-2	9/25/06 16:45	437.75			
SWPW-2	9/25/06 16:50	437.75			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/25/08 16:55	437.75			
SWPW-2	9/25/08 17:00	437.74			
SWPW-2	9/25/08 17:05	437.70			
SWPW-2	9/25/08 17:10	437.69			
SWPW-2	9/25/08 17:15	437.73			
SWPW-2	9/25/08 17:20	437.70			
SWPW-2	9/25/08 17:25	437.70			
SWPW-2	9/25/08 17:30	437.72			
SWPW-2	9/25/08 17:35	437.72			
SWPW-2	9/25/08 17:40	437.71			
SWPW-2	9/25/08 17:45	437.68			
SWPW-2	9/25/08 17:50	437.71			
SWPW-2	9/25/08 17:55	437.70			
SWPW-2	9/25/08 18:00	437.71			
SWPW-2	9/25/08 18:05	437.71			
SWPW-2	9/25/08 18:10	437.67			
SWPW-2	9/25/08 18:15	437.67			
SWPW-2	9/25/08 18:20	437.70			
SWPW-2	9/25/08 18:25	437.69			
SWPW-2	9/25/08 18:30	437.69			
SWPW-2	9/25/08 18:35	437.70			
SWPW-2	9/25/08 18:40	437.65			
SWPW-2	9/25/08 18:45	437.68			
SWPW-2	9/25/08 18:50	437.67			
SWPW-2	9/25/08 18:55	437.69			
SWPW-2	9/25/08 19:00	437.67			
SWPW-2	9/25/08 19:05	437.67			
SWPW-2	9/25/08 19:10	437.67			
SWPW-2	9/25/08 19:15	437.66			
SWPW-2	9/25/08 19:20	437.68			
SWPW-2	9/25/08 19:25	437.67			
SWPW-2	9/25/08 19:30	437.68			
SWPW-2	9/25/08 19:35	437.63			
SWPW-2	9/25/08 19:40	437.64			
SWPW-2	9/25/08 19:45	437.67			
SWPW-2	9/25/08 19:50	437.64			
SWPW-2	9/25/08 19:55	437.65			
SWPW-2	9/25/08 20:00	437.67			
SWPW-2	9/25/08 20:05	437.67			
SWPW-2	9/25/08 20:10	437.66			
SWPW-2	9/25/08 20:15	437.64			
SWPW-2	9/25/08 20:20	437.64			
SWPW-2	9/25/08 20:25	437.64			
SWPW-2	9/25/08 20:30	437.64			
SWPW-2	9/25/08 20:35	437.64			
SWPW-2	9/25/08 20:40	437.64			
SWPW-2	9/25/08 20:45	437.63			
SWPW-2	9/25/08 20:50	437.64			
SWPW-2	9/25/08 20:55	437.63			
SWPW-2	9/25/08 21:00	437.64			
SWPW-2	9/25/08 21:05	437.65			
SWPW-2	9/25/08 21:10	437.64			
SWPW-2	9/25/08 21:15	437.64			
SWPW-2	9/25/08 21:20	437.63			
SWPW-2	9/25/08 21:25	437.66			
SWPW-2	9/25/08 21:30	437.66			
SWPW-2	9/25/08 21:35	437.62			
SWPW-2	9/25/08 21:40	437.66			
SWPW-2	9/25/08 21:45	437.65			
SWPW-2	9/25/08 21:50	437.66			
SWPW-2	9/25/08 21:55	437.65			
SWPW-2	9/25/08 22:00	437.64			
SWPW-2	9/25/08 22:05	437.64			
SWPW-2	9/25/08 22:10	437.63			
SWPW-2	9/25/08 22:15	437.63			
SWPW-2	9/25/08 22:20	437.63			
SWPW-2	9/25/08 22:25	437.62			
SWPW-2	9/25/08 22:30	437.64			
SWPW-2	9/25/08 22:35	437.62			
SWPW-2	9/25/08 22:40	437.63			
SWPW-2	9/25/08 22:45	437.62			
SWPW-2	9/25/08 22:50	437.62			
SWPW-2	9/25/08 22:55	437.63			
SWPW-2	9/25/08 23:00	437.62			
SWPW-2	9/25/08 23:05	437.63			
SWPW-2	9/25/08 23:10	437.62			
SWPW-2	9/25/08 23:15	437.62			
SWPW-2	9/25/08 23:20	437.61			
SWPW-2	9/25/08 23:25	437.62			
SWPW-2	9/25/08 23:30	437.62			
SWPW-2	9/25/08 23:35	437.62			
SWPW-2	9/25/08 23:40	437.62			
SWPW-2	9/25/08 23:45	437.61			
SWPW-2	9/25/08 23:50	437.58			
SWPW-2	9/25/08 23:55	437.63			
SWPW-2	9/26/08 0:00	437.62			
SWPW-2	9/26/08 0:05	437.62			
SWPW-2	9/26/08 0:10	437.58			
SWPW-2	9/26/08 0:15	437.62			
SWPW-2	9/26/08 0:20	437.62			
SWPW-2	9/26/08 0:25	437.63			
SWPW-2	9/26/08 0:30	437.63			
SWPW-2	9/26/08 0:35	437.59			
SWPW-2	9/26/08 0:40	437.63			
SWPW-2	9/26/08 0:45	437.59			
SWPW-2	9/26/08 0:50	437.59			
SWPW-2	9/26/08 0:55	437.59			
SWPW-2	9/26/08 1:00	437.59			
SWPW-2	9/26/08 1:05	437.60			
SWPW-2	9/26/08 1:10	437.64			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/26/06 1:15	437.59			
SWPW-2	9/26/06 1:20	437.59			
SWPW-2	9/26/06 1:25	437.59			
SWPW-2	9/26/06 1:30	437.58			
SWPW-2	9/26/06 1:35	437.59			
SWPW-2	9/26/06 1:40	437.59			
SWPW-2	9/26/06 1:45	437.58			
SWPW-2	9/26/06 1:50	437.57			
SWPW-2	9/26/06 1:55	437.60			
SWPW-2	9/26/06 2:00	437.57			
SWPW-2	9/26/06 2:05	437.60			
SWPW-2	9/26/06 2:10	437.60			
SWPW-2	9/26/06 2:15	437.59			
SWPW-2	9/26/06 2:20	437.60			
SWPW-2	9/26/06 2:25	437.58			
SWPW-2	9/26/06 2:30	437.58			
SWPW-2	9/26/06 2:35	437.59			
SWPW-2	9/26/06 2:40	437.58			
SWPW-2	9/26/06 2:45	437.58			
SWPW-2	9/26/06 2:50	437.59			
SWPW-2	9/26/06 2:55	437.58			
SWPW-2	9/26/06 3:00	437.58			
SWPW-2	9/26/06 3:05	437.58			
SWPW-2	9/26/06 3:10	437.58			
SWPW-2	9/26/06 3:15	437.57			
SWPW-2	9/26/06 3:20	437.57			
SWPW-2	9/26/06 3:25	437.58			
SWPW-2	9/26/06 3:30	437.56			
SWPW-2	9/26/06 3:35	437.57			
SWPW-2	9/26/06 3:40	437.53			
SWPW-2	9/26/06 3:45	437.53			
SWPW-2	9/26/06 3:50	437.56			
SWPW-2	9/26/06 3:55	437.56			
SWPW-2	9/26/06 4:00	437.56			
SWPW-2	9/26/06 4:05	437.56			
SWPW-2	9/26/06 4:10	437.56			
SWPW-2	9/26/06 4:15	437.56			
SWPW-2	9/26/06 4:20	437.55			
SWPW-2	9/26/06 4:25	437.55			
SWPW-2	9/26/06 4:30	437.55			
SWPW-2	9/26/06 4:35	437.56			
SWPW-2	9/26/06 4:40	437.54			
SWPW-2	9/26/06 4:45	437.53			
SWPW-2	9/26/06 4:50	437.50			
SWPW-2	9/26/06 4:55	437.54			
SWPW-2	9/26/06 5:00	437.54			
SWPW-2	9/26/06 5:05	437.50			
SWPW-2	9/26/06 5:10	437.55			
SWPW-2	9/26/06 5:15	437.53			
SWPW-2	9/26/06 5:20	437.53			
SWPW-2	9/26/06 5:25	437.53			
SWPW-2	9/26/06 5:30	437.54			
SWPW-2	9/26/06 5:35	437.53			
SWPW-2	9/26/06 5:40	437.52			
SWPW-2	9/26/06 5:45	437.52			
SWPW-2	9/26/06 5:50	437.49			
SWPW-2	9/26/06 5:55	437.53			
SWPW-2	9/26/06 6:00	437.52			
SWPW-2	9/26/06 6:05	437.49			
SWPW-2	9/26/06 6:10	437.48			
SWPW-2	9/26/06 6:15	437.52			
SWPW-2	9/26/06 6:20	437.48			
SWPW-2	9/26/06 6:25	437.48			
SWPW-2	9/26/06 6:30	437.47			
SWPW-2	9/26/06 6:35	437.52			
SWPW-2	9/26/06 6:40	437.47			
SWPW-2	9/26/06 6:45	437.48			
SWPW-2	9/26/06 6:50	437.46			
SWPW-2	9/26/06 6:55	437.50			
SWPW-2	9/26/06 7:00	437.45			
SWPW-2	9/26/06 7:05	437.48			
SWPW-2	9/26/06 7:10	437.48			
SWPW-2	9/26/06 7:15	437.45			
SWPW-2	9/26/06 7:20	437.48			
SWPW-2	9/26/06 7:25	437.47			
SWPW-2	9/26/06 7:30	437.45			
SWPW-2	9/26/06 7:35	437.44			
SWPW-2	9/26/06 7:40	437.48			
SWPW-2	9/26/06 7:45	437.47			
SWPW-2	9/26/06 7:50	437.46			
SWPW-2	9/26/06 7:55	437.45			
SWPW-2	9/26/06 8:00	437.45			
SWPW-2	9/26/06 8:05	437.46			
SWPW-2	9/26/06 8:10	437.45			
SWPW-2	9/26/06 8:15	437.48			
SWPW-2	9/26/06 8:20	437.45			
SWPW-2	9/26/06 8:25	437.45			
SWPW-2	9/26/06 8:30	437.44			
SWPW-2	9/26/06 8:35	437.46			
SWPW-2	9/26/06 8:40	437.45			
SWPW-2	9/26/06 8:45	437.45			
SWPW-2	9/26/06 8:50	437.44			
SWPW-2	9/26/06 8:55	437.45			
SWPW-2	9/26/06 9:00	437.44			
SWPW-2	9/26/06 9:05	437.45			
SWPW-2	9/26/06 9:10	437.45			
SWPW-2	9/26/06 9:15	437.44			
SWPW-2	9/26/06 9:20	437.46			
SWPW-2	9/26/06 9:25	437.45			
SWPW-2	9/26/06 9:30	437.44			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/26/06 9:35	437.44			
SWPW-2	9/26/06 9:40	437.44			
SWPW-2	9/26/06 9:45	437.44			
SWPW-2	9/26/06 9:50	437.43			
SWPW-2	9/26/06 9:55	437.46			
SWPW-2	9/26/06 10:00	437.47			
SWPW-2	9/26/06 10:05	437.43			
SWPW-2	9/26/06 10:10	437.46			
SWPW-2	9/26/06 10:15	437.44			
SWPW-2	9/26/06 10:20	437.44			
SWPW-2	9/26/06 10:25	437.43			
SWPW-2	9/26/06 10:30	437.42			
SWPW-2	9/26/06 10:35	437.43			
SWPW-2	9/26/06 10:40	437.44			
SWPW-2	9/26/06 10:45	437.44			
SWPW-2	9/26/06 10:50	437.39			
SWPW-2	9/26/06 10:55	437.40			
SWPW-2	9/26/06 11:00	437.43			
SWPW-2	9/26/06 11:05	437.45			
SWPW-2	9/26/06 11:10	437.40			
SWPW-2	9/26/06 11:15	437.43			
SWPW-2	9/26/06 11:20	437.44			
SWPW-2	9/26/06 11:25	437.40			
SWPW-2	9/26/06 11:30	437.43			
SWPW-2	9/26/06 11:35	437.43			
SWPW-2	9/26/06 11:40	437.43			
SWPW-2	9/26/06 11:45	437.40			
SWPW-2	9/26/06 11:50	437.42			
SWPW-2	9/26/06 11:55	437.43			
SWPW-2	9/26/06 12:00	437.43			
SWPW-2	9/26/06 12:05	437.38			
SWPW-2	9/26/06 12:10	437.39			
SWPW-2	9/26/06 12:15	437.42			
SWPW-2	9/26/06 12:20	437.42			
SWPW-2	9/26/06 12:25	437.42			
SWPW-2	9/26/06 12:30	437.41			
SWPW-2	9/26/06 12:35	437.41			
SWPW-2	9/26/06 12:40	437.40			
SWPW-2	9/26/06 12:45	437.39			
SWPW-2	9/26/06 12:50	437.42			
SWPW-2	9/26/06 12:55	437.39			
SWPW-2	9/26/06 13:00	437.39			
SWPW-2	9/26/06 13:05	437.39			
SWPW-2	9/26/06 13:10	437.38			
SWPW-2	9/26/06 13:15	437.39			
SWPW-2	9/26/06 13:20	437.39			
SWPW-2	9/26/06 13:25	437.37			
SWPW-2	9/26/06 13:30	437.37			
SWPW-2	9/26/06 13:35	437.38			
SWPW-2	9/26/06 13:40	437.36			
SWPW-2	9/26/06 13:45	437.37			
SWPW-2	9/26/06 13:50	437.41			
SWPW-2	9/26/06 13:55	437.37			
SWPW-2	9/26/06 14:00	437.36			
SWPW-2	9/26/06 14:05	437.36			
SWPW-2	9/26/06 14:10	437.40			
SWPW-2	9/26/06 14:15	437.37			
SWPW-2	9/26/06 14:20	437.39			
SWPW-2	9/26/06 14:25	437.36			
SWPW-2	9/26/06 14:30	437.36			
SWPW-2	9/26/06 14:35	437.36			
SWPW-2	9/26/06 14:40	437.40			
SWPW-2	9/26/06 14:45	437.36			
SWPW-2	9/26/06 14:50	437.36			
SWPW-2	9/26/06 14:55	437.37			
SWPW-2	9/26/06 15:00	437.36			
SWPW-2	9/26/06 15:05	437.36			
SWPW-2	9/26/06 15:10	437.38			
SWPW-2	9/26/06 15:15	437.36			
SWPW-2	9/26/06 15:20	437.36			
SWPW-2	9/26/06 15:25	437.33			
SWPW-2	9/26/06 15:30	437.36			
SWPW-2	9/26/06 15:35	437.36			
SWPW-2	9/26/06 15:40	437.36			
SWPW-2	9/26/06 15:45	437.32			
SWPW-2	9/26/06 15:50	437.32			
SWPW-2	9/26/06 15:55	437.36			
SWPW-2	9/26/06 16:00	437.32			
SWPW-2	9/26/06 16:05	437.35			
SWPW-2	9/26/06 16:10	437.36			
SWPW-2	9/26/06 16:15	437.32			
SWPW-2	9/26/06 16:20	437.36			
SWPW-2	9/26/06 16:25	437.32			
SWPW-2	9/26/06 16:30	437.32			
SWPW-2	9/26/06 16:35	437.36			
SWPW-2	9/26/06 16:40	437.35			
SWPW-2	9/26/06 16:45	437.31			
SWPW-2	9/26/06 16:50	437.31			
SWPW-2	9/26/06 16:55	437.34			
SWPW-2	9/26/06 17:00	437.35			
SWPW-2	9/26/06 17:05	437.34			
SWPW-2	9/26/06 17:10	437.35			
SWPW-2	9/26/06 17:15	437.34			
SWPW-2	9/26/06 17:20	437.31			
SWPW-2	9/26/06 17:25	437.29			
SWPW-2	9/26/06 17:30	437.34			
SWPW-2	9/26/06 17:35	437.33			
SWPW-2	9/26/06 17:40	437.33			
SWPW-2	9/26/06 17:45	437.33			
SWPW-2	9/26/06 17:50	437.33			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/26/06 17:55	437.33			
SWPW-2	9/26/06 18:00	437.30			
SWPW-2	9/26/06 18:05	437.32			
SWPW-2	9/26/06 18:10	437.32			
SWPW-2	9/26/06 18:15	437.31			
SWPW-2	9/26/06 18:20	437.32			
SWPW-2	9/26/06 18:25	437.32			
SWPW-2	9/26/06 18:30	437.31			
SWPW-2	9/26/06 18:35	437.31			
SWPW-2	9/26/06 18:40	437.34			
SWPW-2	9/26/06 18:45	437.32			
SWPW-2	9/26/06 18:50	437.32			
SWPW-2	9/26/06 18:55	437.31			
SWPW-2	9/26/06 19:00	437.31			
SWPW-2	9/26/06 19:05	437.31			
SWPW-2	9/26/06 19:10	437.31			
SWPW-2	9/26/06 19:15	437.27			
SWPW-2	9/26/06 19:20	437.31			
SWPW-2	9/26/06 19:25	437.31			
SWPW-2	9/26/06 19:30	437.31			
SWPW-2	9/26/06 19:35	437.31			
SWPW-2	9/26/06 19:40	437.31			
SWPW-2	9/26/06 19:45	437.32			
SWPW-2	9/26/06 19:50	437.31			
SWPW-2	9/26/06 19:55	437.28			
SWPW-2	9/26/06 20:00	437.28			
SWPW-2	9/26/06 20:05	437.32			
SWPW-2	9/26/06 20:10	437.28			
SWPW-2	9/26/06 20:15	437.28			
SWPW-2	9/26/06 20:20	437.28			
SWPW-2	9/26/06 20:25	437.30			
SWPW-2	9/26/06 20:30	437.29			
SWPW-2	9/26/06 20:35	437.31			
SWPW-2	9/26/06 20:40	437.32			
SWPW-2	9/26/06 20:45	437.32			
SWPW-2	9/26/06 20:50	437.29			
SWPW-2	9/26/06 20:55	437.28			
SWPW-2	9/26/06 21:00	437.31			
SWPW-2	9/26/06 21:05	437.31			
SWPW-2	9/26/06 21:10	437.30			
SWPW-2	9/26/06 21:15	437.31			
SWPW-2	9/26/06 21:20	437.30			
SWPW-2	9/26/06 21:25	437.31			
SWPW-2	9/26/06 21:30	437.31			
SWPW-2	9/26/06 21:35	437.30			
SWPW-2	9/26/06 21:40	437.30			
SWPW-2	9/26/06 21:45	437.30			
SWPW-2	9/26/06 21:50	437.29			
SWPW-2	9/26/06 21:55	437.29			
SWPW-2	9/26/06 22:00	437.29			
SWPW-2	9/26/06 22:05	437.30			
SWPW-2	9/26/06 22:10	437.29			
SWPW-2	9/26/06 22:15	437.29			
SWPW-2	9/26/06 22:20	437.33			
SWPW-2	9/26/06 22:25	437.28			
SWPW-2	9/26/06 22:30	437.32			
SWPW-2	9/26/06 22:35	437.31			
SWPW-2	9/26/06 22:40	437.31			
SWPW-2	9/26/06 22:45	437.31			
SWPW-2	9/26/06 22:50	437.31			
SWPW-2	9/26/06 22:55	437.30			
SWPW-2	9/26/06 23:00	437.32			
SWPW-2	9/26/06 23:05	437.31			
SWPW-2	9/26/06 23:10	437.28			
SWPW-2	9/26/06 23:15	437.31			
SWPW-2	9/26/06 23:20	437.26			
SWPW-2	9/26/06 23:25	437.27			
SWPW-2	9/26/06 23:30	437.27			
SWPW-2	9/26/06 23:35	437.27			
SWPW-2	9/26/06 23:40	437.28			
SWPW-2	9/26/06 23:45	437.28			
SWPW-2	9/26/06 23:50	437.31			
SWPW-2	9/26/06 23:55	437.28			
SWPW-2	9/27/06 0:00	437.29			
SWPW-2	9/27/06 0:05	437.29			
SWPW-2	9/27/06 0:10	437.27			
SWPW-2	9/27/06 0:15	437.28			
SWPW-2	9/27/06 0:20	437.29			
SWPW-2	9/27/06 0:25	437.28			
SWPW-2	9/27/06 0:30	437.28			
SWPW-2	9/27/06 0:35	437.29			
SWPW-2	9/27/06 0:40	437.29			
SWPW-2	9/27/06 0:45	437.29			
SWPW-2	9/27/06 0:50	437.29			
SWPW-2	9/27/06 0:55	437.29			
SWPW-2	9/27/06 1:00	437.29			
SWPW-2	9/27/06 1:05	437.29			
SWPW-2	9/27/06 1:10	437.30			
SWPW-2	9/27/06 1:15	437.28			
SWPW-2	9/27/06 1:20	437.29			
SWPW-2	9/27/06 1:25	437.30			
SWPW-2	9/27/06 1:30	437.25			
SWPW-2	9/27/06 1:35	437.30			
SWPW-2	9/27/06 1:40	437.27			
SWPW-2	9/27/06 1:45	437.27			
SWPW-2	9/27/06 1:50	437.26			
SWPW-2	9/27/06 1:55	437.26			
SWPW-2	9/27/06 2:00	437.30			
SWPW-2	9/27/06 2:05	437.29			
SWPW-2	9/27/06 2:10	437.29			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/27/06 2:15	437.25			
SWPW-2	9/27/06 2:20	437.24			
SWPW-2	9/27/06 2:25	437.28			
SWPW-2	9/27/06 2:30	437.28			
SWPW-2	9/27/06 2:35	437.28			
SWPW-2	9/27/06 2:40	437.27			
SWPW-2	9/27/06 2:45	437.28			
SWPW-2	9/27/06 2:50	437.27			
SWPW-2	9/27/06 2:55	437.26			
SWPW-2	9/27/06 3:00	437.26			
SWPW-2	9/27/06 3:05	437.26			
SWPW-2	9/27/06 3:10	437.26			
SWPW-2	9/27/06 3:15	437.25			
SWPW-2	9/27/06 3:20	437.26			
SWPW-2	9/27/06 3:25	437.26			
SWPW-2	9/27/06 3:30	437.27			
SWPW-2	9/27/06 3:35	437.25			
SWPW-2	9/27/06 3:40	437.24			
SWPW-2	9/27/06 3:45	437.25			
SWPW-2	9/27/06 3:50	437.25			
SWPW-2	9/27/06 3:55	437.25			
SWPW-2	9/27/06 4:00	437.24			
SWPW-2	9/27/06 4:05	437.24			
SWPW-2	9/27/06 4:10	437.24			
SWPW-2	9/27/06 4:15	437.22			
SWPW-2	9/27/06 4:20	437.23			
SWPW-2	9/27/06 4:25	437.23			
SWPW-2	9/27/06 4:30	437.23			
SWPW-2	9/27/06 4:35	437.23			
SWPW-2	9/27/06 4:40	437.22			
SWPW-2	9/27/06 4:45	437.24			
SWPW-2	9/27/06 4:50	437.23			
SWPW-2	9/27/06 4:55	437.23			
SWPW-2	9/27/06 5:00	437.22			
SWPW-2	9/27/06 5:05	437.22			
SWPW-2	9/27/06 5:10	437.22			
SWPW-2	9/27/06 5:15	437.23			
SWPW-2	9/27/06 5:20	437.22			
SWPW-2	9/27/06 5:25	437.23			
SWPW-2	9/27/06 5:30	437.23			
SWPW-2	9/27/06 5:35	437.24			
SWPW-2	9/27/06 5:40	437.19			
SWPW-2	9/27/06 5:45	437.19			
SWPW-2	9/27/06 5:50	437.23			
SWPW-2	9/27/06 5:55	437.23			
SWPW-2	9/27/06 6:00	437.23			
SWPW-2	9/27/06 6:05	437.23			
SWPW-2	9/27/06 6:10	437.22			
SWPW-2	9/27/06 6:15	437.22			
SWPW-2	9/27/06 6:20	437.23			
SWPW-2	9/27/06 6:25	437.22			
SWPW-2	9/27/06 6:30	437.23			
SWPW-2	9/27/06 6:35	437.22			
SWPW-2	9/27/06 6:40	437.22			
SWPW-2	9/27/06 6:45	437.18			
SWPW-2	9/27/06 6:50	437.22			
SWPW-2	9/27/06 6:55	437.18			
SWPW-2	9/27/06 7:00	437.18			
SWPW-2	9/27/06 7:05	437.18			
SWPW-2	9/27/06 7:10	437.21			
SWPW-2	9/27/06 7:15	437.20			
SWPW-2	9/27/06 7:20	437.19			
SWPW-2	9/27/06 7:25	437.20			
SWPW-2	9/27/06 7:30	437.20			
SWPW-2	9/27/06 7:35	437.20			
SWPW-2	9/27/06 7:40	437.19			
SWPW-2	9/27/06 7:45	437.18			
SWPW-2	9/27/06 7:50	437.18			
SWPW-2	9/27/06 7:55	437.18			
SWPW-2	9/27/06 8:00	437.19			
SWPW-2	9/27/06 8:05	437.18			
SWPW-2	9/27/06 8:10	437.18			
SWPW-2	9/27/06 8:15	437.18			
SWPW-2	9/27/06 8:20	437.16			
SWPW-2	9/27/06 8:25	437.18			
SWPW-2	9/27/06 8:30	437.18			
SWPW-2	9/27/06 8:35	437.17			
SWPW-2	9/27/06 8:40	437.16			
SWPW-2	9/27/06 8:45	437.17			
SWPW-2	9/27/06 8:50	437.16			
SWPW-2	9/27/06 8:55	437.17			
SWPW-2	9/27/06 9:00	437.16			
SWPW-2	9/27/06 9:05	437.13			
SWPW-2	9/27/06 9:10	437.16			
SWPW-2	9/27/06 9:15	437.17			
SWPW-2	9/27/06 9:20	437.17			
SWPW-2	9/27/06 9:25	437.16			
SWPW-2	9/27/06 9:30	437.17			
SWPW-2	9/27/06 9:35	437.17			
SWPW-2	9/27/06 9:40	437.18			
SWPW-2	9/27/06 9:45	437.18			
SWPW-2	9/27/06 9:50	437.16			
SWPW-2	9/27/06 9:55	437.17			
SWPW-2	9/27/06 10:00	437.15			
SWPW-2	9/27/06 10:05	437.17			
SWPW-2	9/27/06 10:10	437.18			
SWPW-2	9/27/06 10:15	437.17			
SWPW-2	9/27/06 10:20	437.17			
SWPW-2	9/27/06 10:25	437.17			
SWPW-2	9/27/06 10:30	437.16			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/27/06 10:35	437.18			
SWPW-2	9/27/06 10:40	437.16			
SWPW-2	9/27/06 10:45	437.15			
SWPW-2	9/27/06 10:50	437.16			
SWPW-2	9/27/06 10:55	437.16			
SWPW-2	9/27/06 11:00	437.14			
SWPW-2	9/27/06 11:05	437.14			
SWPW-2	9/27/06 11:10	437.19			
SWPW-2	9/27/06 11:15	437.16			
SWPW-2	9/27/06 11:20	437.15			
SWPW-2	9/27/06 11:25	437.15			
SWPW-2	9/27/06 11:30	437.14			
SWPW-2	9/27/06 11:35	437.14			
SWPW-2	9/27/06 11:40	437.15			
SWPW-2	9/27/06 11:45	437.15			
SWPW-2	9/27/06 11:50	437.15			
SWPW-2	9/27/06 11:55	437.16			
SWPW-2	9/27/06 12:00	437.16			
SWPW-2	9/27/06 12:05	437.15			
SWPW-2	9/27/06 12:10	437.14			
SWPW-2	9/27/06 12:15	437.15			
SWPW-2	9/27/06 12:20	437.15			
SWPW-2	9/27/06 12:25	437.15			
SWPW-2	9/27/06 12:30	437.15			
SWPW-2	9/27/06 12:35	437.14			
SWPW-2	9/27/06 12:40	437.14			
SWPW-2	9/27/06 12:45	437.15			
SWPW-2	9/27/06 12:50	437.18			
SWPW-2	9/27/06 12:55	437.12			
SWPW-2	9/27/06 13:00	437.14			
SWPW-2	9/27/06 13:05	437.14			
SWPW-2	9/27/06 13:10	437.15			
SWPW-2	9/27/06 13:15	437.16			
SWPW-2	9/27/06 13:20	437.16			
SWPW-2	9/27/06 13:25	437.17			
SWPW-2	9/27/06 13:30	437.13			
SWPW-2	9/27/06 13:35	437.12			
SWPW-2	9/27/06 13:40	437.13			
SWPW-2	9/27/06 13:45	437.16			
SWPW-2	9/27/06 13:50	437.17			
SWPW-2	9/27/06 13:55	437.16			
SWPW-2	9/27/06 14:00	437.13			
SWPW-2	9/27/06 14:05	437.16			
SWPW-2	9/27/06 14:10	437.16			
SWPW-2	9/27/06 14:15	437.14			
SWPW-2	9/27/06 14:20	437.16			
SWPW-2	9/27/06 14:25	437.10			
SWPW-2	9/27/06 14:30	437.14			
SWPW-2	9/27/06 14:35	437.15			
SWPW-2	9/27/06 14:40	437.15			
SWPW-2	9/27/06 14:45	437.13			
SWPW-2	9/27/06 14:50	437.15			
SWPW-2	9/27/06 14:55	437.13			
SWPW-2	9/27/06 15:00	437.14			
SWPW-2	9/27/06 15:05	437.11			
SWPW-2	9/27/06 15:10	437.13			
SWPW-2	9/27/06 15:15	437.13			
SWPW-2	9/27/06 15:20	437.13			
SWPW-2	9/27/06 15:25	437.13			
SWPW-2	9/27/06 15:30	437.10			
SWPW-2	9/27/06 15:35	437.14			
SWPW-2	9/27/06 15:40	437.10			
SWPW-2	9/27/06 15:45	437.13			
SWPW-2	9/27/06 15:50	437.14			
SWPW-2	9/27/06 15:55	437.12			
SWPW-2	9/27/06 16:00	437.14			
SWPW-2	9/27/06 16:05	437.10			
SWPW-2	9/27/06 16:10	437.13			
SWPW-2	9/27/06 16:15	437.09			
SWPW-2	9/27/06 16:20	437.10			
SWPW-2	9/27/06 16:25	437.09			
SWPW-2	9/27/06 16:30	437.13			
SWPW-2	9/27/06 16:35	437.08			
SWPW-2	9/27/06 16:40	437.11			
SWPW-2	9/27/06 16:45	437.08			
SWPW-2	9/27/06 16:50	437.08			
SWPW-2	9/27/06 16:55	437.08			
SWPW-2	9/27/06 17:00	437.08			
SWPW-2	9/27/06 17:05	437.11			
SWPW-2	9/27/06 17:10	437.08			
SWPW-2	9/27/06 17:15	437.09			
SWPW-2	9/27/06 17:20	437.09			
SWPW-2	9/27/06 17:25	437.08			
SWPW-2	9/27/06 17:30	437.07			
SWPW-2	9/27/06 17:35	437.07			
SWPW-2	9/27/06 17:40	437.07			
SWPW-2	9/27/06 17:45	437.08			
SWPW-2	9/27/06 17:50	437.07			
SWPW-2	9/27/06 17:55	437.08			
SWPW-2	9/27/06 18:00	437.08			
SWPW-2	9/27/06 18:05	437.07			
SWPW-2	9/27/06 18:10	437.07			
SWPW-2	9/27/06 18:15	437.07			
SWPW-2	9/27/06 18:20	437.10			
SWPW-2	9/27/06 18:25	437.07			
SWPW-2	9/27/06 18:30	437.12			
SWPW-2	9/27/06 18:35	437.08			
SWPW-2	9/27/06 18:40	437.08			
SWPW-2	9/27/06 18:45	437.08			
SWPW-2	9/27/06 18:50	437.07			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/27/06 18:55	437.07			
SWPW-2	9/27/06 19:00	437.08			
SWPW-2	9/27/06 19:05	437.07			
SWPW-2	9/27/06 19:10	437.07			
SWPW-2	9/27/06 19:15	437.07			
SWPW-2	9/27/06 19:20	437.07			
SWPW-2	9/27/06 19:25	437.06			
SWPW-2	9/27/06 19:30	437.08			
SWPW-2	9/27/06 19:35	437.08			
SWPW-2	9/27/06 19:40	437.05			
SWPW-2	9/27/06 19:45	437.06			
SWPW-2	9/27/06 19:50	437.06			
SWPW-2	9/27/06 19:55	437.05			
SWPW-2	9/27/06 20:00	437.05			
SWPW-2	9/27/06 20:05	437.05			
SWPW-2	9/27/06 20:10	437.05			
SWPW-2	9/27/06 20:15	437.04			
SWPW-2	9/27/06 20:20	437.05			
SWPW-2	9/27/06 20:25	437.06			
SWPW-2	9/27/06 20:30	437.05			
SWPW-2	9/27/06 20:35	437.08			
SWPW-2	9/27/06 20:40	437.04			
SWPW-2	9/27/06 20:45	437.04			
SWPW-2	9/27/06 20:50	437.05			
SWPW-2	9/27/06 20:55	437.04			
SWPW-2	9/27/06 21:00	437.04			
SWPW-2	9/27/06 21:05	437.03			
SWPW-2	9/27/06 21:10	437.03			
SWPW-2	9/27/06 21:15	437.04			
SWPW-2	9/27/06 21:20	437.03			
SWPW-2	9/27/06 21:25	437.03			
SWPW-2	9/27/06 21:30	437.04			
SWPW-2	9/27/06 21:35	437.03			
SWPW-2	9/27/06 21:40	437.03			
SWPW-2	9/27/06 21:45	437.03			
SWPW-2	9/27/06 21:50	437.04			
SWPW-2	9/27/06 21:55	437.03			
SWPW-2	9/27/06 22:00	437.03			
SWPW-2	9/27/06 22:05	437.04			
SWPW-2	9/27/06 22:10	437.03			
SWPW-2	9/27/06 22:15	437.01			
SWPW-2	9/27/06 22:20	437.03			
SWPW-2	9/27/06 22:25	437.05			
SWPW-2	9/27/06 22:30	437.03			
SWPW-2	9/27/06 22:35	437.02			
SWPW-2	9/27/06 22:40	437.02			
SWPW-2	9/27/06 22:45	437.02			
SWPW-2	9/27/06 22:50	437.04			
SWPW-2	9/27/06 22:55	437.04			
SWPW-2	9/27/06 23:00	437.04			
SWPW-2	9/27/06 23:05	437.03			
SWPW-2	9/27/06 23:10	437.03			
SWPW-2	9/27/06 23:15	437.04			
SWPW-2	9/27/06 23:20	437.04			
SWPW-2	9/27/06 23:25	437.03			
SWPW-2	9/27/06 23:30	437.03			
SWPW-2	9/27/06 23:35	437.05			
SWPW-2	9/27/06 23:40	437.00			
SWPW-2	9/27/06 23:45	437.03			
SWPW-2	9/27/06 23:50	437.00			
SWPW-2	9/27/06 23:55	437.04			
SWPW-2	9/28/06 0:00	437.00			
SWPW-2	9/28/06 0:05	437.04			
SWPW-2	9/28/06 0:10	437.00			
SWPW-2	9/28/06 0:15	437.00			
SWPW-2	9/28/06 0:20	437.04			
SWPW-2	9/28/06 0:25	437.00			
SWPW-2	9/28/06 0:30	437.03			
SWPW-2	9/28/06 0:35	437.04			
SWPW-2	9/28/06 0:40	437.00			
SWPW-2	9/28/06 0:45	437.03			
SWPW-2	9/28/06 0:50	437.04			
SWPW-2	9/28/06 0:55	436.99			
SWPW-2	9/28/06 1:00	437.02			
SWPW-2	9/28/06 1:05	436.99			
SWPW-2	9/28/06 1:10	437.02			
SWPW-2	9/28/06 1:15	437.02			
SWPW-2	9/28/06 1:20	437.03			
SWPW-2	9/28/06 1:25	437.01			
SWPW-2	9/28/06 1:30	437.00			
SWPW-2	9/28/06 1:35	437.01			
SWPW-2	9/28/06 1:40	437.03			
SWPW-2	9/28/06 1:45	437.01			
SWPW-2	9/28/06 1:50	437.00			
SWPW-2	9/28/06 1:55	437.00			
SWPW-2	9/28/06 2:00	437.00			
SWPW-2	9/28/06 2:05	437.04			
SWPW-2	9/28/06 2:10	437.00			
SWPW-2	9/28/06 2:15	437.00			
SWPW-2	9/28/06 2:20	436.98			
SWPW-2	9/28/06 2:25	437.00			
SWPW-2	9/28/06 2:30	437.00			
SWPW-2	9/28/06 2:35	437.00			
SWPW-2	9/28/06 2:40	436.99			
SWPW-2	9/28/06 2:45	436.99			
SWPW-2	9/28/06 2:50	436.99			
SWPW-2	9/28/06 2:55	437.00			
SWPW-2	9/28/06 3:00	436.99			
SWPW-2	9/28/06 3:05	436.99			
SWPW-2	9/28/06 3:10	437.00			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/28/06 3:15	437.00			
SWPW-2	9/28/06 3:20	436.97			
SWPW-2	9/28/06 3:25	436.99			
SWPW-2	9/28/06 3:30	437.00			
SWPW-2	9/28/06 3:35	436.97			
SWPW-2	9/28/06 3:40	436.98			
SWPW-2	9/28/06 3:45	436.99			
SWPW-2	9/28/06 3:50	436.98			
SWPW-2	9/28/06 3:55	436.98			
SWPW-2	9/28/06 4:00	436.98			
SWPW-2	9/28/06 4:05	436.99			
SWPW-2	9/28/06 4:10	436.98			
SWPW-2	9/28/06 4:15	436.97			
SWPW-2	9/28/06 4:20	436.97			
SWPW-2	9/28/06 4:25	436.97			
SWPW-2	9/28/06 4:30	436.97			
SWPW-2	9/28/06 4:35	436.96			
SWPW-2	9/28/06 4:40	436.95			
SWPW-2	9/28/06 4:45	436.96			
SWPW-2	9/28/06 4:50	436.96			
SWPW-2	9/28/06 4:55	436.95			
SWPW-2	9/28/06 5:00	436.96			
SWPW-2	9/28/06 5:05	436.95			
SWPW-2	9/28/06 5:10	436.96			
SWPW-2	9/28/06 5:15	436.95			
SWPW-2	9/28/06 5:20	436.95			
SWPW-2	9/28/06 5:25	436.96			
SWPW-2	9/28/06 5:30	436.95			
SWPW-2	9/28/06 5:35	436.95			
SWPW-2	9/28/06 5:40	436.94			
SWPW-2	9/28/06 5:45	436.94			
SWPW-2	9/28/06 5:50	436.93			
SWPW-2	9/28/06 5:55	436.93			
SWPW-2	9/28/06 6:00	436.94			
SWPW-2	9/28/06 6:05	436.92			
SWPW-2	9/28/06 6:10	436.94			
SWPW-2	9/28/06 6:15	436.97			
SWPW-2	9/28/06 6:20	436.93			
SWPW-2	9/28/06 6:25	436.91			
SWPW-2	9/28/06 6:30	436.90			
SWPW-2	9/28/06 6:35	436.93			
SWPW-2	9/28/06 6:40	436.93			
SWPW-2	9/28/06 6:45	436.92			
SWPW-2	9/28/06 6:50	436.91			
SWPW-2	9/28/06 6:55	436.92			
SWPW-2	9/28/06 7:00	436.91			
SWPW-2	9/28/06 7:05	436.91			
SWPW-2	9/28/06 7:10	436.92			
SWPW-2	9/28/06 7:15	436.90			
SWPW-2	9/28/06 7:20	436.86			
SWPW-2	9/28/06 7:25	436.90			
SWPW-2	9/28/06 7:30	436.90			
SWPW-2	9/28/06 7:35	436.95			
SWPW-2	9/28/06 7:40	436.89			
SWPW-2	9/28/06 7:45	436.89			
SWPW-2	9/28/06 7:50	436.92			
SWPW-2	9/28/06 7:55	436.88			
SWPW-2	9/28/06 8:00	436.91			
SWPW-2	9/28/06 8:05	436.92			
SWPW-2	9/28/06 8:10	436.89			
SWPW-2	9/28/06 8:15	436.88			
SWPW-2	9/28/06 8:20	436.88			
SWPW-2	9/28/06 8:25	436.87			
SWPW-2	9/28/06 8:30	436.86			
SWPW-2	9/28/06 8:35	436.91			
SWPW-2	9/28/06 8:40	436.87			
SWPW-2	9/28/06 8:45	436.87			
SWPW-2	9/28/06 8:50	436.87			
SWPW-2	9/28/06 8:55	436.87			
SWPW-2	9/28/06 9:00	436.87			
SWPW-2	9/28/06 9:05	436.87			
SWPW-2	9/28/06 9:10	436.88			
SWPW-2	9/28/06 9:15	436.88			
SWPW-2	9/28/06 9:20	436.86			
SWPW-2	9/28/06 9:25	436.87			
SWPW-2	9/28/06 9:30	436.88			
SWPW-2	9/28/06 9:35	436.83			
SWPW-2	9/28/06 9:40	436.88			
SWPW-2	9/28/06 9:45	436.84			
SWPW-2	9/28/06 9:50	436.87			
SWPW-2	9/28/06 9:55	436.82			
SWPW-2	9/28/06 10:00	436.85			
SWPW-2	9/28/06 10:05	436.86			
SWPW-2	9/28/06 10:10	436.85			
SWPW-2	9/28/06 10:15	436.85			
SWPW-2	9/28/06 10:20	436.84			
SWPW-2	9/28/06 10:25	436.84			
SWPW-2	9/28/06 10:30	436.84			
SWPW-2	9/28/06 10:35	436.83			
SWPW-2	9/28/06 10:40	436.85			
SWPW-2	9/28/06 10:45	436.83			
SWPW-2	9/28/06 10:50	436.84			
SWPW-2	9/28/06 10:55	436.84			
SWPW-2	9/28/06 11:00	436.84			
SWPW-2	9/28/06 11:05	436.84			
SWPW-2	9/28/06 11:10	436.83			
SWPW-2	9/28/06 11:15	436.84			
SWPW-2	9/28/06 11:20	436.83			
SWPW-2	9/28/06 11:25	436.80			
SWPW-2	9/28/06 11:30	436.82			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/28/06 11:35	436.83			
SWPW-2	9/28/06 11:40	436.81			
SWPW-2	9/28/06 11:45	436.78			
SWPW-2	9/28/06 11:50	436.81			
SWPW-2	9/28/06 11:55	436.81			
SWPW-2	9/28/06 12:00	436.80			
SWPW-2	9/28/06 12:05	436.80			
SWPW-2	9/28/06 12:10	436.80			
SWPW-2	9/28/06 12:15	436.79			
SWPW-2	9/28/06 12:20	436.80			
SWPW-2	9/28/06 12:25	436.78			
SWPW-2	9/28/06 12:30	436.79			
SWPW-2	9/28/06 12:35	436.79			
SWPW-2	9/28/06 12:40	436.78			
SWPW-2	9/28/06 12:45	436.79			
SWPW-2	9/28/06 12:50	436.79			
SWPW-2	9/28/06 12:55	436.79			
SWPW-2	9/28/06 13:00	436.78			
SWPW-2	9/28/06 13:05	436.79			
SWPW-2	9/28/06 13:10	436.77			
SWPW-2	9/28/06 13:15	436.79			
SWPW-2	9/28/06 13:20	436.78			
SWPW-2	9/28/06 13:25	436.75			
SWPW-2	9/28/06 13:30	436.75			
SWPW-2	9/28/06 13:35	436.77			
SWPW-2	9/28/06 13:40	436.77			
SWPW-2	9/28/06 13:45	436.77			
SWPW-2	9/28/06 13:50	436.77			
SWPW-2	9/28/06 13:55	436.78			
SWPW-2	9/28/06 14:00	436.76			
SWPW-2	9/28/06 14:05	436.77			
SWPW-2	9/28/06 14:10	436.77			
SWPW-2	9/28/06 14:15	436.76			
SWPW-2	9/28/06 14:20	436.76			
SWPW-2	9/28/06 14:25	436.76			
SWPW-2	9/28/06 14:30	436.76			
SWPW-2	9/28/06 14:35	436.72			
SWPW-2	9/28/06 14:40	436.76			
SWPW-2	9/28/06 14:45	436.76			
SWPW-2	9/28/06 14:50	436.72			
SWPW-2	9/28/06 14:55	436.76			
SWPW-2	9/28/06 15:00	436.75			
SWPW-2	9/28/06 15:05	436.72			
SWPW-2	9/28/06 15:10	436.71			
SWPW-2	9/28/06 15:15	436.76			
SWPW-2	9/28/06 15:20	436.75			
SWPW-2	9/28/06 15:25	436.71			
SWPW-2	9/28/06 15:30	436.75			
SWPW-2	9/28/06 15:35	436.75			
SWPW-2	9/28/06 15:40	436.75			
SWPW-2	9/28/06 15:45	436.73			
SWPW-2	9/28/06 15:50	436.71			
SWPW-2	9/28/06 15:55	436.70			
SWPW-2	9/28/06 16:00	436.73			
SWPW-2	9/28/06 16:05	436.74			
SWPW-2	9/28/06 16:10	436.73			
SWPW-2	9/28/06 16:15	436.75			
SWPW-2	9/28/06 16:20	436.71			
SWPW-2	9/28/06 16:25	436.70			
SWPW-2	9/28/06 16:30	436.75			
SWPW-2	9/28/06 16:35	436.74			
SWPW-2	9/28/06 16:40	436.69			
SWPW-2	9/28/06 16:45	436.74			
SWPW-2	9/28/06 16:50	436.70			
SWPW-2	9/28/06 16:55	436.70			
SWPW-2	9/28/06 17:00	436.72			
SWPW-2	9/28/06 17:05	436.71			
SWPW-2	9/28/06 17:10	436.71			
SWPW-2	9/28/06 17:15	436.70			
SWPW-2	9/28/06 17:20	436.70			
SWPW-2	9/28/06 17:25	436.70			
SWPW-2	9/28/06 17:30	436.70			
SWPW-2	9/28/06 17:35	436.71			
SWPW-2	9/28/06 17:40	436.69			
SWPW-2	9/28/06 17:45	436.68			
SWPW-2	9/28/06 17:50	436.72			
SWPW-2	9/28/06 17:55	436.73			
SWPW-2	9/28/06 18:00	436.73			
SWPW-2	9/28/06 18:05	436.71			
SWPW-2	9/28/06 18:10	436.70			
SWPW-2	9/28/06 18:15	436.70			
SWPW-2	9/28/06 18:20	436.69			
SWPW-2	9/28/06 18:25	436.70			
SWPW-2	9/28/06 18:30	436.69			
SWPW-2	9/28/06 18:35	436.69			
SWPW-2	9/28/06 18:40	436.70			
SWPW-2	9/28/06 18:45	436.70			
SWPW-2	9/28/06 18:50	436.69			
SWPW-2	9/28/06 18:55	436.69			
SWPW-2	9/28/06 19:00	436.69			
SWPW-2	9/28/06 19:05	436.69			
SWPW-2	9/28/06 19:10	436.69			
SWPW-2	9/28/06 19:15	436.73			
SWPW-2	9/28/06 19:20	436.69			
SWPW-2	9/28/06 19:25	436.70			
SWPW-2	9/28/06 19:30	436.69			
SWPW-2	9/28/06 19:35	436.70			
SWPW-2	9/28/06 19:40	436.69			
SWPW-2	9/28/06 19:45	436.71			
SWPW-2	9/28/06 19:50	436.67			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/28/06 19:55	436.67			
SWPW-2	9/28/06 20:00	436.70			
SWPW-2	9/28/06 20:05	436.70			
SWPW-2	9/28/06 20:10	436.69			
SWPW-2	9/28/06 20:15	436.69			
SWPW-2	9/28/06 20:20	436.69			
SWPW-2	9/28/06 20:25	436.70			
SWPW-2	9/28/06 20:30	436.71			
SWPW-2	9/28/06 20:35	436.71			
SWPW-2	9/28/06 20:40	436.66			
SWPW-2	9/28/06 20:45	436.68			
SWPW-2	9/28/06 20:50	436.68			
SWPW-2	9/28/06 20:55	436.69			
SWPW-2	9/28/06 21:00	436.69			
SWPW-2	9/28/06 21:05	436.68			
SWPW-2	9/28/06 21:10	436.67			
SWPW-2	9/28/06 21:15	436.67			
SWPW-2	9/28/06 21:20	436.66			
SWPW-2	9/28/06 21:25	436.67			
SWPW-2	9/28/06 21:30	436.70			
SWPW-2	9/28/06 21:35	436.66			
SWPW-2	9/28/06 21:40	436.71			
SWPW-2	9/28/06 21:45	436.70			
SWPW-2	9/28/06 21:50	436.65			
SWPW-2	9/28/06 21:55	436.69			
SWPW-2	9/28/06 22:00	436.65			
SWPW-2	9/28/06 22:05	436.69			
SWPW-2	9/28/06 22:10	436.69			
SWPW-2	9/28/06 22:15	436.69			
SWPW-2	9/28/06 22:20	436.65			
SWPW-2	9/28/06 22:25	436.70			
SWPW-2	9/28/06 22:30	436.65			
SWPW-2	9/28/06 22:35	436.70			
SWPW-2	9/28/06 22:40	436.69			
SWPW-2	9/28/06 22:45	436.66			
SWPW-2	9/28/06 22:50	436.65			
SWPW-2	9/28/06 22:55	436.65			
SWPW-2	9/28/06 23:00	436.69			
SWPW-2	9/28/06 23:05	436.66			
SWPW-2	9/28/06 23:10	436.70			
SWPW-2	9/28/06 23:15	436.68			
SWPW-2	9/28/06 23:20	436.69			
SWPW-2	9/28/06 23:25	436.66			
SWPW-2	9/28/06 23:30	436.67			
SWPW-2	9/28/06 23:35	436.67			
SWPW-2	9/28/06 23:40	436.68			
SWPW-2	9/28/06 23:45	436.68			
SWPW-2	9/28/06 23:50	436.67			
SWPW-2	9/28/06 23:55	436.67			
SWPW-2	9/29/06 0:00	436.68			
SWPW-2	9/29/06 0:05	436.67			
SWPW-2	9/29/06 0:10	436.67			
SWPW-2	9/29/06 0:15	436.67			
SWPW-2	9/29/06 0:20	436.69			
SWPW-2	9/29/06 0:25	436.67			
SWPW-2	9/29/06 0:30	436.67			
SWPW-2	9/29/06 0:35	436.64			
SWPW-2	9/29/06 0:40	436.68			
SWPW-2	9/29/06 0:45	436.68			
SWPW-2	9/29/06 0:50	436.68			
SWPW-2	9/29/06 0:55	436.68			
SWPW-2	9/29/06 1:00	436.65			
SWPW-2	9/29/06 1:05	436.64			
SWPW-2	9/29/06 1:10	436.68			
SWPW-2	9/29/06 1:15	436.67			
SWPW-2	9/29/06 1:20	436.63			
SWPW-2	9/29/06 1:25	436.67			
SWPW-2	9/29/06 1:30	436.67			
SWPW-2	9/29/06 1:35	436.67			
SWPW-2	9/29/06 1:40	436.68			
SWPW-2	9/29/06 1:45	436.67			
SWPW-2	9/29/06 1:50	436.66			
SWPW-2	9/29/06 1:55	436.66			
SWPW-2	9/29/06 2:00	436.65			
SWPW-2	9/29/06 2:05	436.62			
SWPW-2	9/29/06 2:10	436.65			
SWPW-2	9/29/06 2:15	436.69			
SWPW-2	9/29/06 2:20	436.66			
SWPW-2	9/29/06 2:25	436.65			
SWPW-2	9/29/06 2:30	436.65			
SWPW-2	9/29/06 2:35	436.65			
SWPW-2	9/29/06 2:40	436.68			
SWPW-2	9/29/06 2:45	436.64			
SWPW-2	9/29/06 2:50	436.65			
SWPW-2	9/29/06 2:55	436.64			
SWPW-2	9/29/06 3:00	436.65			
SWPW-2	9/29/06 3:05	436.68			
SWPW-2	9/29/06 3:10	436.66			
SWPW-2	9/29/06 3:15	436.65			
SWPW-2	9/29/06 3:20	436.65			
SWPW-2	9/29/06 3:25	436.65			
SWPW-2	9/29/06 3:30	436.65			
SWPW-2	9/29/06 3:35	436.65			
SWPW-2	9/29/06 3:40	436.66			
SWPW-2	9/29/06 3:45	436.66			
SWPW-2	9/29/06 3:50	436.66			
SWPW-2	9/29/06 3:55	436.66			
SWPW-2	9/29/06 4:00	436.62			
SWPW-2	9/29/06 4:05	436.65			
SWPW-2	9/29/06 4:10	436.65			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/29/06 4:15	436.65			
SWPW-2	9/29/06 4:20	436.65			
SWPW-2	9/29/06 4:25	436.63			
SWPW-2	9/29/06 4:30	436.65			
SWPW-2	9/29/06 4:35	436.64			
SWPW-2	9/29/06 4:40	436.63			
SWPW-2	9/29/06 4:45	436.64			
SWPW-2	9/29/06 4:50	436.65			
SWPW-2	9/29/06 4:55	436.64			
SWPW-2	9/29/06 5:00	436.63			
SWPW-2	9/29/06 5:05	436.63			
SWPW-2	9/29/06 5:10	436.64			
SWPW-2	9/29/06 5:15	436.64			
SWPW-2	9/29/06 5:20	436.64			
SWPW-2	9/29/06 5:25	436.63			
SWPW-2	9/29/06 5:30	436.64			
SWPW-2	9/29/06 5:35	436.64			
SWPW-2	9/29/06 5:40	436.63			
SWPW-2	9/29/06 5:45	436.63			
SWPW-2	9/29/06 5:50	436.63			
SWPW-2	9/29/06 5:55	436.63			
SWPW-2	9/29/06 6:00	436.63			
SWPW-2	9/29/06 6:05	436.61			
SWPW-2	9/29/06 6:10	436.63			
SWPW-2	9/29/06 6:15	436.63			
SWPW-2	9/29/06 6:20	436.62			
SWPW-2	9/29/06 6:25	436.63			
SWPW-2	9/29/06 6:30	436.63			
SWPW-2	9/29/06 6:35	436.63			
SWPW-2	9/29/06 6:40	436.63			
SWPW-2	9/29/06 6:45	436.63			
SWPW-2	9/29/06 6:50	436.63			
SWPW-2	9/29/06 6:55	436.62			
SWPW-2	9/29/06 7:00	436.62			
SWPW-2	9/29/06 7:05	436.62			
SWPW-2	9/29/06 7:10	436.62			
SWPW-2	9/29/06 7:15	436.62			
SWPW-2	9/29/06 7:20	436.62			
SWPW-2	9/29/06 7:25	436.62			
SWPW-2	9/29/06 7:30	436.61			
SWPW-2	9/29/06 7:35	436.62			
SWPW-2	9/29/06 7:40	436.62			
SWPW-2	9/29/06 7:45	436.61			
SWPW-2	9/29/06 7:50	436.66			
SWPW-2	9/29/06 7:55	436.61			
SWPW-2	9/29/06 8:00	436.62			
SWPW-2	9/29/06 8:05	436.61			
SWPW-2	9/29/06 8:10	436.62			
SWPW-2	9/29/06 8:15	436.61			
SWPW-2	9/29/06 8:20	436.61			
SWPW-2	9/29/06 8:25	436.61			
SWPW-2	9/29/06 8:30	436.61			
SWPW-2	9/29/06 8:35	436.60			
SWPW-2	9/29/06 8:40	436.59			
SWPW-2	9/29/06 8:45	436.60			
SWPW-2	9/29/06 8:50	436.61			
SWPW-2	9/29/06 8:55	436.60			
SWPW-2	9/29/06 9:00	436.60			
SWPW-2	9/29/06 9:05	436.60			
SWPW-2	9/29/06 9:10	436.61			
SWPW-2	9/29/06 9:15	436.60			
SWPW-2	9/29/06 9:20	436.60			
SWPW-2	9/29/06 9:25	436.60			
SWPW-2	9/29/06 9:30	436.61			
SWPW-2	9/29/06 9:35	436.60			
SWPW-2	9/29/06 9:40	436.60			
SWPW-2	9/29/06 9:45	436.61			
SWPW-2	9/29/06 9:50	436.57			
SWPW-2	9/29/06 9:55	436.60			
SWPW-2	9/29/06 10:00	436.60			
SWPW-2	9/29/06 10:05	436.61			
SWPW-2	9/29/06 10:10	436.59			
SWPW-2	9/29/06 10:15	436.60			
SWPW-2	9/29/06 10:20	436.60			
SWPW-2	9/29/06 10:25	436.59			
SWPW-2	9/29/06 10:30	436.59			
SWPW-2	9/29/06 10:35	436.60			
SWPW-2	9/29/06 10:40	436.60			
SWPW-2	9/29/06 10:45	436.60			
SWPW-2	9/29/06 10:50	436.59			
SWPW-2	9/29/06 10:55	436.59			
SWPW-2	9/29/06 11:00	436.56			
SWPW-2	9/29/06 11:05	436.60			
SWPW-2	9/29/06 11:10	436.60			
SWPW-2	9/29/06 11:15	436.59			
SWPW-2	9/29/06 11:20	436.61			
SWPW-2	9/29/06 11:25	436.56			
SWPW-2	9/29/06 11:30	436.56			
SWPW-2	9/29/06 11:35	436.59			
SWPW-2	9/29/06 11:40	436.56			
SWPW-2	9/29/06 11:45	436.55			
SWPW-2	9/29/06 11:50	436.58			
SWPW-2	9/29/06 11:55	436.55			
SWPW-2	9/29/06 12:00	436.58			
SWPW-2	9/29/06 12:05	436.58			
SWPW-2	9/29/06 12:10	436.58			
SWPW-2	9/29/06 12:15	436.58			
SWPW-2	9/29/06 12:20	436.54			
SWPW-2	9/29/06 12:25	436.54			
SWPW-2	9/29/06 12:30	436.54			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/29/06 12:35	436.58			
SWPW-2	9/29/06 12:40	436.53			
SWPW-2	9/29/06 12:45	436.56			
SWPW-2	9/29/06 12:50	436.56			
SWPW-2	9/29/06 12:55	436.56			
SWPW-2	9/29/06 13:00	436.55			
SWPW-2	9/29/06 13:05	436.55			
SWPW-2	9/29/06 13:10	436.55			
SWPW-2	9/29/06 13:15	436.54			
SWPW-2	9/29/06 13:20	436.54			
SWPW-2	9/29/06 13:25	436.54			
SWPW-2	9/29/06 13:30	436.52			
SWPW-2	9/29/06 13:35	436.53			
SWPW-2	9/29/06 13:40	436.57			
SWPW-2	9/29/06 13:45	436.52			
SWPW-2	9/29/06 13:50	436.52			
SWPW-2	9/29/06 13:55	436.53			
SWPW-2	9/29/06 14:00	436.52			
SWPW-2	9/29/06 14:05	436.51			
SWPW-2	9/29/06 14:10	436.56			
SWPW-2	9/29/06 14:15	436.51			
SWPW-2	9/29/06 14:20	436.55			
SWPW-2	9/29/06 14:25	436.55			
SWPW-2	9/29/06 14:30	436.51			
SWPW-2	9/29/06 14:35	436.51			
SWPW-2	9/29/06 14:40	436.52			
SWPW-2	9/29/06 14:45	436.51			
SWPW-2	9/29/06 14:50	436.51			
SWPW-2	9/29/06 14:55	436.52			
SWPW-2	9/29/06 15:00	436.52			
SWPW-2	9/29/06 15:05	436.53			
SWPW-2	9/29/06 15:10	436.53			
SWPW-2	9/29/06 15:15	436.52			
SWPW-2	9/29/06 15:20	436.51			
SWPW-2	9/29/06 15:25	436.52			
SWPW-2	9/29/06 15:30	436.51			
SWPW-2	9/29/06 15:35	436.51			
SWPW-2	9/29/06 15:40	436.50			
SWPW-2	9/29/06 15:45	436.51			
SWPW-2	9/29/06 15:50	436.51			
SWPW-2	9/29/06 15:55	436.47			
SWPW-2	9/29/06 16:00	436.51			
SWPW-2	9/29/06 16:05	436.48			
SWPW-2	9/29/06 16:10	436.51			
SWPW-2	9/29/06 16:15	436.52			
SWPW-2	9/29/06 16:20	436.50			
SWPW-2	9/29/06 16:25	436.51			
SWPW-2	9/29/06 16:30	436.49			
SWPW-2	9/29/06 16:35	436.50			
SWPW-2	9/29/06 16:40	436.50			
SWPW-2	9/29/06 16:45	436.47			
SWPW-2	9/29/06 16:50	436.52			
SWPW-2	9/29/06 16:55	436.51			
SWPW-2	9/29/06 17:00	436.50			
SWPW-2	9/29/06 17:05	436.49			
SWPW-2	9/29/06 17:10	436.50			
SWPW-2	9/29/06 17:15	436.49			
SWPW-2	9/29/06 17:20	436.48			
SWPW-2	9/29/06 17:25	436.49			
SWPW-2	9/29/06 17:30	436.49			
SWPW-2	9/29/06 17:35	436.49			
SWPW-2	9/29/06 17:40	436.50			
SWPW-2	9/29/06 17:45	436.49			
SWPW-2	9/29/06 17:50	436.49			
SWPW-2	9/29/06 17:55	436.46			
SWPW-2	9/29/06 18:00	436.49			
SWPW-2	9/29/06 18:05	436.49			
SWPW-2	9/29/06 18:10	436.50			
SWPW-2	9/29/06 18:15	436.49			
SWPW-2	9/29/06 18:20	436.50			
SWPW-2	9/29/06 18:25	436.49			
SWPW-2	9/29/06 18:30	436.50			
SWPW-2	9/29/06 18:35	436.50			
SWPW-2	9/29/06 18:40	436.50			
SWPW-2	9/29/06 18:45	436.50			
SWPW-2	9/29/06 18:50	436.50			
SWPW-2	9/29/06 18:55	436.49			
SWPW-2	9/29/06 19:00	436.52			
SWPW-2	9/29/06 19:05	436.48			
SWPW-2	9/29/06 19:10	436.51			
SWPW-2	9/29/06 19:15	436.49			
SWPW-2	9/29/06 19:20	436.49			
SWPW-2	9/29/06 19:25	436.48			
SWPW-2	9/29/06 19:30	436.45			
SWPW-2	9/29/06 19:35	436.50			
SWPW-2	9/29/06 19:40	436.48			
SWPW-2	9/29/06 19:45	436.49			
SWPW-2	9/29/06 19:50	436.48			
SWPW-2	9/29/06 19:55	436.49			
SWPW-2	9/29/06 20:00	436.50			
SWPW-2	9/29/06 20:05	436.49			
SWPW-2	9/29/06 20:10	436.45			
SWPW-2	9/29/06 20:15	436.49			
SWPW-2	9/29/06 20:20	436.46			
SWPW-2	9/29/06 20:25	436.49			
SWPW-2	9/29/06 20:30	436.49			
SWPW-2	9/29/06 20:35	436.49			
SWPW-2	9/29/06 20:40	436.45			
SWPW-2	9/29/06 20:45	436.49			
SWPW-2	9/29/06 20:50	436.46			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/29/06 20:55	436.49			
SWPW-2	9/29/06 21:00	436.48			
SWPW-2	9/29/06 21:05	436.48			
SWPW-2	9/29/06 21:10	436.45			
SWPW-2	9/29/06 21:15	436.48			
SWPW-2	9/29/06 21:20	436.48			
SWPW-2	9/29/06 21:25	436.48			
SWPW-2	9/29/06 21:30	436.49			
SWPW-2	9/29/06 21:35	436.49			
SWPW-2	9/29/06 21:40	436.47			
SWPW-2	9/29/06 21:45	436.47			
SWPW-2	9/29/06 21:50	436.47			
SWPW-2	9/29/06 21:55	436.44			
SWPW-2	9/29/06 22:00	436.47			
SWPW-2	9/29/06 22:05	436.48			
SWPW-2	9/29/06 22:10	436.48			
SWPW-2	9/29/06 22:15	436.48			
SWPW-2	9/29/06 22:20	436.47			
SWPW-2	9/29/06 22:25	436.47			
SWPW-2	9/29/06 22:30	436.47			
SWPW-2	9/29/06 22:35	436.48			
SWPW-2	9/29/06 22:40	436.47			
SWPW-2	9/29/06 22:45	436.48			
SWPW-2	9/29/06 22:50	436.47			
SWPW-2	9/29/06 22:55	436.47			
SWPW-2	9/29/06 23:00	436.47			
SWPW-2	9/29/06 23:05	436.48			
SWPW-2	9/29/06 23:10	436.46			
SWPW-2	9/29/06 23:15	436.46			
SWPW-2	9/29/06 23:20	436.45			
SWPW-2	9/29/06 23:25	436.46			
SWPW-2	9/29/06 23:30	436.45			
SWPW-2	9/29/06 23:35	436.45			
SWPW-2	9/29/06 23:40	436.45			
SWPW-2	9/29/06 23:45	436.49			
SWPW-2	9/29/06 23:50	436.45			
SWPW-2	9/29/06 23:55	436.48			
SWPW-2	9/30/06 0:00	436.45			
SWPW-2	9/30/06 0:05	436.44			
SWPW-2	9/30/06 0:10	436.45			
SWPW-2	9/30/06 0:15	436.44			
SWPW-2	9/30/06 0:20	436.45			
SWPW-2	9/30/06 0:25	436.47			
SWPW-2	9/30/06 0:30	436.47			
SWPW-2	9/30/06 0:35	436.47			
SWPW-2	9/30/06 0:40	436.48			
SWPW-2	9/30/06 0:45	436.47			
SWPW-2	9/30/06 0:50	436.46			
SWPW-2	9/30/06 0:55	436.43			
SWPW-2	9/30/06 1:00	436.46			
SWPW-2	9/30/06 1:05	436.47			
SWPW-2	9/30/06 1:10	436.43			
SWPW-2	9/30/06 1:15	436.43			
SWPW-2	9/30/06 1:20	436.44			
SWPW-2	9/30/06 1:25	436.44			
SWPW-2	9/30/06 1:30	436.44			
SWPW-2	9/30/06 1:35	436.43			
SWPW-2	9/30/06 1:40	436.44			
SWPW-2	9/30/06 1:45	436.44			
SWPW-2	9/30/06 1:50	436.45			
SWPW-2	9/30/06 1:55	436.43			
SWPW-2	9/30/06 2:00	436.44			
SWPW-2	9/30/06 2:05	436.45			
SWPW-2	9/30/06 2:10	436.45			
SWPW-2	9/30/06 2:15	436.44			
SWPW-2	9/30/06 2:20	436.45			
SWPW-2	9/30/06 2:25	436.48			
SWPW-2	9/30/06 2:30	436.43			
SWPW-2	9/30/06 2:35	436.44			
SWPW-2	9/30/06 2:40	436.44			
SWPW-2	9/30/06 2:45	436.44			
SWPW-2	9/30/06 2:50	436.43			
SWPW-2	9/30/06 2:55	436.44			
SWPW-2	9/30/06 3:00	436.44			
SWPW-2	9/30/06 3:05	436.49			
SWPW-2	9/30/06 3:10	436.43			
SWPW-2	9/30/06 3:15	436.44			
SWPW-2	9/30/06 3:20	436.44			
SWPW-2	9/30/06 3:25	436.44			
SWPW-2	9/30/06 3:30	436.44			
SWPW-2	9/30/06 3:35	436.43			
SWPW-2	9/30/06 3:40	436.43			
SWPW-2	9/30/06 3:45	436.46			
SWPW-2	9/30/06 3:50	436.42			
SWPW-2	9/30/06 3:55	436.42			
SWPW-2	9/30/06 4:00	436.42			
SWPW-2	9/30/06 4:05	436.45			
SWPW-2	9/30/06 4:10	436.45			
SWPW-2	9/30/06 4:15	436.45			
SWPW-2	9/30/06 4:20	436.44			
SWPW-2	9/30/06 4:25	436.41			
SWPW-2	9/30/06 4:30	436.44			
SWPW-2	9/30/06 4:35	436.41			
SWPW-2	9/30/06 4:40	436.44			
SWPW-2	9/30/06 4:45	436.44			
SWPW-2	9/30/06 4:50	436.43			
SWPW-2	9/30/06 4:55	436.43			
SWPW-2	9/30/06 5:00	436.44			
SWPW-2	9/30/06 5:05	436.44			
SWPW-2	9/30/06 5:10	436.44			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/30/06 5:15	436.44			
SWPW-2	9/30/06 5:20	436.45			
SWPW-2	9/30/06 5:25	436.42			
SWPW-2	9/30/06 5:30	436.41			
SWPW-2	9/30/06 5:35	436.41			
SWPW-2	9/30/06 5:40	436.45			
SWPW-2	9/30/06 5:45	436.42			
SWPW-2	9/30/06 5:50	436.46			
SWPW-2	9/30/06 5:55	436.44			
SWPW-2	9/30/06 6:00	436.40			
SWPW-2	9/30/06 6:05	436.45			
SWPW-2	9/30/06 6:10	436.42			
SWPW-2	9/30/06 6:15	436.41			
SWPW-2	9/30/06 6:20	436.40			
SWPW-2	9/30/06 6:25	436.41			
SWPW-2	9/30/06 6:30	436.45			
SWPW-2	9/30/06 6:35	436.41			
SWPW-2	9/30/06 6:40	436.41			
SWPW-2	9/30/06 6:45	436.40			
SWPW-2	9/30/06 6:50	436.41			
SWPW-2	9/30/06 6:55	436.45			
SWPW-2	9/30/06 7:00	436.45			
SWPW-2	9/30/06 7:05	436.45			
SWPW-2	9/30/06 7:10	436.44			
SWPW-2	9/30/06 7:15	436.44			
SWPW-2	9/30/06 7:20	436.40			
SWPW-2	9/30/06 7:25	436.41			
SWPW-2	9/30/06 7:30	436.45			
SWPW-2	9/30/06 7:35	436.42			
SWPW-2	9/30/06 7:40	436.41			
SWPW-2	9/30/06 7:45	436.38			
SWPW-2	9/30/06 7:50	436.42			
SWPW-2	9/30/06 7:55	436.41			
SWPW-2	9/30/06 8:00	436.39			
SWPW-2	9/30/06 8:05	436.43			
SWPW-2	9/30/06 8:10	436.38			
SWPW-2	9/30/06 8:15	436.42			
SWPW-2	9/30/06 8:20	436.38			
SWPW-2	9/30/06 8:25	436.43			
SWPW-2	9/30/06 8:30	436.38			
SWPW-2	9/30/06 8:35	436.42			
SWPW-2	9/30/06 8:40	436.39			
SWPW-2	9/30/06 8:45	436.41			
SWPW-2	9/30/06 8:50	436.41			
SWPW-2	9/30/06 8:55	436.41			
SWPW-2	9/30/06 9:00	436.41			
SWPW-2	9/30/06 9:05	436.41			
SWPW-2	9/30/06 9:10	436.40			
SWPW-2	9/30/06 9:15	436.40			
SWPW-2	9/30/06 9:20	436.40			
SWPW-2	9/30/06 9:25	436.40			
SWPW-2	9/30/06 9:30	436.40			
SWPW-2	9/30/06 9:35	436.40			
SWPW-2	9/30/06 9:40	436.39			
SWPW-2	9/30/06 9:45	436.40			
SWPW-2	9/30/06 9:50	436.39			
SWPW-2	9/30/06 9:55	436.39			
SWPW-2	9/30/06 10:00	436.38			
SWPW-2	9/30/06 10:05	436.39			
SWPW-2	9/30/06 10:10	436.39			
SWPW-2	9/30/06 10:15	436.39			
SWPW-2	9/30/06 10:20	436.38			
SWPW-2	9/30/06 10:25	436.38			
SWPW-2	9/30/06 10:30	436.38			
SWPW-2	9/30/06 10:35	436.37			
SWPW-2	9/30/06 10:40	436.36			
SWPW-2	9/30/06 10:45	436.36			
SWPW-2	9/30/06 10:50	436.36			
SWPW-2	9/30/06 10:55	436.36			
SWPW-2	9/30/06 11:00	436.37			
SWPW-2	9/30/06 11:05	436.36			
SWPW-2	9/30/06 11:10	436.35			
SWPW-2	9/30/06 11:15	436.37			
SWPW-2	9/30/06 11:20	436.36			
SWPW-2	9/30/06 11:25	436.36			
SWPW-2	9/30/06 11:30	436.36			
SWPW-2	9/30/06 11:35	436.35			
SWPW-2	9/30/06 11:40	436.34			
SWPW-2	9/30/06 11:45	436.35			
SWPW-2	9/30/06 11:50	436.35			
SWPW-2	9/30/06 11:55	436.35			
SWPW-2	9/30/06 12:00	436.34			
SWPW-2	9/30/06 12:05	436.34			
SWPW-2	9/30/06 12:10	436.34			
SWPW-2	9/30/06 12:15	436.33			
SWPW-2	9/30/06 12:20	436.33			
SWPW-2	9/30/06 12:25	436.33			
SWPW-2	9/30/06 12:30	436.33			
SWPW-2	9/30/06 12:35	436.33			
SWPW-2	9/30/06 12:40	436.32			
SWPW-2	9/30/06 12:45	436.32			
SWPW-2	9/30/06 12:50	436.32			
SWPW-2	9/30/06 12:55	436.32			
SWPW-2	9/30/06 13:00	436.33			
SWPW-2	9/30/06 13:05	436.32			
SWPW-2	9/30/06 13:10	436.32			
SWPW-2	9/30/06 13:15	436.31			
SWPW-2	9/30/06 13:20	436.31			
SWPW-2	9/30/06 13:25	436.35			
SWPW-2	9/30/06 13:30	436.31			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/30/08 13:35	436.30			
SWPW-2	9/30/08 13:40	436.29			
SWPW-2	9/30/08 13:45	436.31			
SWPW-2	9/30/08 13:50	436.33			
SWPW-2	9/30/08 13:55	436.34			
SWPW-2	9/30/08 14:00	436.29			
SWPW-2	9/30/08 14:05	436.29			
SWPW-2	9/30/08 14:10	436.30			
SWPW-2	9/30/08 14:15	436.29			
SWPW-2	9/30/08 14:20	436.29			
SWPW-2	9/30/08 14:25	436.29			
SWPW-2	9/30/08 14:30	436.29			
SWPW-2	9/30/08 14:35	436.29			
SWPW-2	9/30/08 14:40	436.31			
SWPW-2	9/30/08 14:45	436.30			
SWPW-2	9/30/08 14:50	436.30			
SWPW-2	9/30/08 14:55	436.26			
SWPW-2	9/30/08 15:00	436.31			
SWPW-2	9/30/08 15:05	436.29			
SWPW-2	9/30/08 15:10	436.28			
SWPW-2	9/30/08 15:15	436.28			
SWPW-2	9/30/08 15:20	436.28			
SWPW-2	9/30/08 15:25	436.33			
SWPW-2	9/30/08 15:30	436.27			
SWPW-2	9/30/08 15:35	436.27			
SWPW-2	9/30/08 15:40	436.27			
SWPW-2	9/30/08 15:45	436.26			
SWPW-2	9/30/08 15:50	436.27			
SWPW-2	9/30/08 15:55	436.28			
SWPW-2	9/30/08 16:00	436.27			
SWPW-2	9/30/08 16:05	436.26			
SWPW-2	9/30/08 16:10	436.26			
SWPW-2	9/30/08 16:15	436.27			
SWPW-2	9/30/08 16:20	436.26			
SWPW-2	9/30/08 16:25	436.27			
SWPW-2	9/30/08 16:30	436.26			
SWPW-2	9/30/08 16:35	436.26			
SWPW-2	9/30/08 16:40	436.25			
SWPW-2	9/30/08 16:45	436.26			
SWPW-2	9/30/08 16:50	436.25			
SWPW-2	9/30/08 16:55	436.26			
SWPW-2	9/30/08 17:00	436.27			
SWPW-2	9/30/08 17:05	436.22			
SWPW-2	9/30/08 17:10	436.23			
SWPW-2	9/30/08 17:15	436.25			
SWPW-2	9/30/08 17:20	436.26			
SWPW-2	9/30/08 17:25	436.25			
SWPW-2	9/30/08 17:30	436.26			
SWPW-2	9/30/08 17:35	436.25			
SWPW-2	9/30/08 17:40	436.24			
SWPW-2	9/30/08 17:45	436.24			
SWPW-2	9/30/08 17:50	436.25			
SWPW-2	9/30/08 17:55	436.25			
SWPW-2	9/30/08 18:00	436.25			
SWPW-2	9/30/08 18:05	436.24			
SWPW-2	9/30/08 18:10	436.24			
SWPW-2	9/30/08 18:15	436.24			
SWPW-2	9/30/08 18:20	436.22			
SWPW-2	9/30/08 18:25	436.26			
SWPW-2	9/30/08 18:30	436.23			
SWPW-2	9/30/08 18:35	436.22			
SWPW-2	9/30/08 18:40	436.21			
SWPW-2	9/30/08 18:45	436.22			
SWPW-2	9/30/08 18:50	436.22			
SWPW-2	9/30/08 18:55	436.21			
SWPW-2	9/30/08 19:00	436.23			
SWPW-2	9/30/08 19:05	436.22			
SWPW-2	9/30/08 19:10	436.24			
SWPW-2	9/30/08 19:15	436.22			
SWPW-2	9/30/08 19:20	436.22			
SWPW-2	9/30/08 19:25	436.23			
SWPW-2	9/30/08 19:30	436.26			
SWPW-2	9/30/08 19:35	436.22			
SWPW-2	9/30/08 19:40	436.23			
SWPW-2	9/30/08 19:45	436.22			
SWPW-2	9/30/08 19:50	436.22			
SWPW-2	9/30/08 19:55	436.22			
SWPW-2	9/30/08 20:00	436.23			
SWPW-2	9/30/08 20:05	436.26			
SWPW-2	9/30/08 20:10	436.21			
SWPW-2	9/30/08 20:15	436.22			
SWPW-2	9/30/08 20:20	436.21			
SWPW-2	9/30/08 20:25	436.25			
SWPW-2	9/30/08 20:30	436.25			
SWPW-2	9/30/08 20:35	436.21			
SWPW-2	9/30/08 20:40	436.20			
SWPW-2	9/30/08 20:45	436.24			
SWPW-2	9/30/08 20:50	436.24			
SWPW-2	9/30/08 20:55	436.23			
SWPW-2	9/30/08 21:00	436.24			
SWPW-2	9/30/08 21:05	436.24			
SWPW-2	9/30/08 21:10	436.23			
SWPW-2	9/30/08 21:15	436.24			
SWPW-2	9/30/08 21:20	436.20			
SWPW-2	9/30/08 21:25	436.24			
SWPW-2	9/30/08 21:30	436.24			
SWPW-2	9/30/08 21:35	436.22			
SWPW-2	9/30/08 21:40	436.23			
SWPW-2	9/30/08 21:45	436.23			
SWPW-2	9/30/08 21:50	436.22			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	9/30/06 21:55	436.23			
SWPW-2	9/30/06 22:00	436.22			
SWPW-2	9/30/06 22:05	436.22			
SWPW-2	9/30/06 22:10	436.19			
SWPW-2	9/30/06 22:15	436.18			
SWPW-2	9/30/06 22:20	436.22			
SWPW-2	9/30/06 22:25	436.22			
SWPW-2	9/30/06 22:30	436.23			
SWPW-2	9/30/06 22:35	436.18			
SWPW-2	9/30/06 22:40	436.22			
SWPW-2	9/30/06 22:45	436.23			
SWPW-2	9/30/06 22:50	436.22			
SWPW-2	9/30/06 22:55	436.23			
SWPW-2	9/30/06 23:00	436.22			
SWPW-2	9/30/06 23:05	436.18			
SWPW-2	9/30/06 23:10	436.18			
SWPW-2	9/30/06 23:15	436.22			
SWPW-2	9/30/06 23:20	436.19			
SWPW-2	9/30/06 23:25	436.18			
SWPW-2	9/30/06 23:30	436.20			
SWPW-2	9/30/06 23:35	436.19			
SWPW-2	9/30/06 23:40	436.19			
SWPW-2	9/30/06 23:45	436.23			
SWPW-2	9/30/06 23:50	436.19			
SWPW-2	9/30/06 23:55	436.20			
SWPW-2	10/1/06 0:00	436.20			
SWPW-2	10/1/06 0:05	436.20			
SWPW-2	10/1/06 0:10	436.16			
SWPW-2	10/1/06 0:15	436.20			
SWPW-2	10/1/06 0:20	436.20			
SWPW-2	10/1/06 0:25	436.21			
SWPW-2	10/1/06 0:30	436.21			
SWPW-2	10/1/06 0:35	436.16			
SWPW-2	10/1/06 0:40	436.20			
SWPW-2	10/1/06 0:45	436.20			
SWPW-2	10/1/06 0:50	436.20			
SWPW-2	10/1/06 0:55	436.16			
SWPW-2	10/1/06 1:00	436.16			
SWPW-2	10/1/06 1:05	436.16			
SWPW-2	10/1/06 1:10	436.17			
SWPW-2	10/1/06 1:15	436.16			
SWPW-2	10/1/06 1:20	436.18			
SWPW-2	10/1/06 1:25	436.21			
SWPW-2	10/1/06 1:30	436.16			
SWPW-2	10/1/06 1:35	436.21			
SWPW-2	10/1/06 1:40	436.19			
SWPW-2	10/1/06 1:45	436.19			
SWPW-2	10/1/06 1:50	436.20			
SWPW-2	10/1/06 1:55	436.19			
SWPW-2	10/1/06 2:00	436.18			
SWPW-2	10/1/06 2:05	436.19			
SWPW-2	10/1/06 2:10	436.19			
SWPW-2	10/1/06 2:15	436.19			
SWPW-2	10/1/06 2:20	436.19			
SWPW-2	10/1/06 2:25	436.18			
SWPW-2	10/1/06 2:30	436.19			
SWPW-2	10/1/06 2:35	436.19			
SWPW-2	10/1/06 2:40	436.18			
SWPW-2	10/1/06 2:45	436.18			
SWPW-2	10/1/06 2:50	436.19			
SWPW-2	10/1/06 2:55	436.19			
SWPW-2	10/1/06 3:00	436.17			
SWPW-2	10/1/06 3:05	436.19			
SWPW-2	10/1/06 3:10	436.18			
SWPW-2	10/1/06 3:15	436.19			
SWPW-2	10/1/06 3:20	436.18			
SWPW-2	10/1/06 3:25	436.18			
SWPW-2	10/1/06 3:30	436.19			
SWPW-2	10/1/06 3:35	436.18			
SWPW-2	10/1/06 3:40	436.18			
SWPW-2	10/1/06 3:45	436.18			
SWPW-2	10/1/06 3:50	436.18			
SWPW-2	10/1/06 3:55	436.17			
SWPW-2	10/1/06 4:00	436.17			
SWPW-2	10/1/06 4:05	436.17			
SWPW-2	10/1/06 4:10	436.18			
SWPW-2	10/1/06 4:15	436.17			
SWPW-2	10/1/06 4:20	436.16			
SWPW-2	10/1/06 4:25	436.16			
SWPW-2	10/1/06 4:30	436.17			
SWPW-2	10/1/06 4:35	436.17			
SWPW-2	10/1/06 4:40	436.15			
SWPW-2	10/1/06 4:45	436.20			
SWPW-2	10/1/06 4:50	436.16			
SWPW-2	10/1/06 4:55	436.17			
SWPW-2	10/1/06 5:00	436.16			
SWPW-2	10/1/06 5:05	436.16			
SWPW-2	10/1/06 5:10	436.17			
SWPW-2	10/1/06 5:15	436.16			
SWPW-2	10/1/06 5:20	436.16			
SWPW-2	10/1/06 5:25	436.15			
SWPW-2	10/1/06 5:30	436.16			
SWPW-2	10/1/06 5:35	436.16			
SWPW-2	10/1/06 5:40	436.16			
SWPW-2	10/1/06 5:45	436.15			
SWPW-2	10/1/06 5:50	436.16			
SWPW-2	10/1/06 5:55	436.17			
SWPW-2	10/1/06 6:00	436.16			
SWPW-2	10/1/06 6:05	436.17			
SWPW-2	10/1/06 6:10	436.16			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	10/1/06 6:15	436.17			
SWPW-2	10/1/06 6:20	436.17			
SWPW-2	10/1/06 6:25	436.16			
SWPW-2	10/1/06 6:30	436.16			
SWPW-2	10/1/06 6:35	436.16			
SWPW-2	10/1/06 6:40	436.17			
SWPW-2	10/1/06 6:45	436.16			
SWPW-2	10/1/06 6:50	436.16			
SWPW-2	10/1/06 6:55	436.17			
SWPW-2	10/1/06 7:00	436.21			
SWPW-2	10/1/06 7:05	436.17			
SWPW-2	10/1/06 7:10	436.17			
SWPW-2	10/1/06 7:15	436.15			
SWPW-2	10/1/06 7:20	436.19			
SWPW-2	10/1/06 7:25	436.19			
SWPW-2	10/1/06 7:30	436.18			
SWPW-2	10/1/06 7:35	436.18			
SWPW-2	10/1/06 7:40	436.18			
SWPW-2	10/1/06 7:45	436.14			
SWPW-2	10/1/06 7:50	436.15			
SWPW-2	10/1/06 7:55	436.18			
SWPW-2	10/1/06 8:00	436.19			
SWPW-2	10/1/06 8:05	436.19			
SWPW-2	10/1/06 8:10	436.18			
SWPW-2	10/1/06 8:15	436.18			
SWPW-2	10/1/06 8:20	436.19			
SWPW-2	10/1/06 8:25	436.20			
SWPW-2	10/1/06 8:30	436.19			
SWPW-2	10/1/06 8:35	436.19			
SWPW-2	10/1/06 8:40	436.19			
SWPW-2	10/1/06 8:45	436.18			
SWPW-2	10/1/06 8:50	436.18			
SWPW-2	10/1/06 8:55	436.18			
SWPW-2	10/1/06 9:00	436.17			
SWPW-2	10/1/06 9:05	436.21			
SWPW-2	10/1/06 9:10	436.17			
SWPW-2	10/1/06 9:15	436.20			
SWPW-2	10/1/06 9:20	436.17			
SWPW-2	10/1/06 9:25	436.16			
SWPW-2	10/1/06 9:30	436.20			
SWPW-2	10/1/06 9:35	436.17			
SWPW-2	10/1/06 9:40	436.16			
SWPW-2	10/1/06 9:45	436.17			
SWPW-2	10/1/06 9:50	436.17			
SWPW-2	10/1/06 9:55	436.16			
SWPW-2	10/1/06 10:00	436.20			
SWPW-2	10/1/06 10:05	436.20			
SWPW-2	10/1/06 10:10	436.20			
SWPW-2	10/1/06 10:15	436.19			
SWPW-2	10/1/06 10:20	436.16			
SWPW-2	10/1/06 10:25	436.15			
SWPW-2	10/1/06 10:30	436.19			
SWPW-2	10/1/06 10:35	436.19			
SWPW-2	10/1/06 10:40	436.19			
SWPW-2	10/1/06 10:45	436.14			
SWPW-2	10/1/06 10:50	436.19			
SWPW-2	10/1/06 10:55	436.14			
SWPW-2	10/1/06 11:00	436.18			
SWPW-2	10/1/06 11:05	436.18			
SWPW-2	10/1/06 11:10	436.17			
SWPW-2	10/1/06 11:15	436.15			
SWPW-2	10/1/06 11:20	436.14			
SWPW-2	10/1/06 11:25	436.18			
SWPW-2	10/1/06 11:30	436.17			
SWPW-2	10/1/06 11:35	436.15			
SWPW-2	10/1/06 11:40	436.17			
SWPW-2	10/1/06 11:45	436.14			
SWPW-2	10/1/06 11:50	436.18			
SWPW-2	10/1/06 11:55	436.13			
SWPW-2	10/1/06 12:00	436.17			
SWPW-2	10/1/06 12:05	436.16			
SWPW-2	10/1/06 12:10	436.13			
SWPW-2	10/1/06 12:15	436.16			
SWPW-2	10/1/06 12:20	436.16			
SWPW-2	10/1/06 12:25	436.15			
SWPW-2	10/1/06 12:30	436.12			
SWPW-2	10/1/06 12:35	436.15			
SWPW-2	10/1/06 12:40	436.11			
SWPW-2	10/1/06 12:45	436.12			
SWPW-2	10/1/06 12:50	436.12			
SWPW-2	10/1/06 12:55	436.11			
SWPW-2	10/1/06 13:00	436.12			
SWPW-2	10/1/06 13:05	436.14			
SWPW-2	10/1/06 13:10	436.10			
SWPW-2	10/1/06 13:15	436.10			
SWPW-2	10/1/06 13:20	436.13			
SWPW-2	10/1/06 13:25	436.11			
SWPW-2	10/1/06 13:30	436.11			
SWPW-2	10/1/06 13:35	436.10			
SWPW-2	10/1/06 13:40	436.10			
SWPW-2	10/1/06 13:45	436.11			
SWPW-2	10/1/06 13:50	436.10			
SWPW-2	10/1/06 13:55	436.09			
SWPW-2	10/1/06 14:00	436.10			
SWPW-2	10/1/06 14:05	436.10			
SWPW-2	10/1/06 14:10	436.09			
SWPW-2	10/1/06 14:15	436.10			
SWPW-2	10/1/06 14:20	436.10			
SWPW-2	10/1/06 14:25	436.08			
SWPW-2	10/1/06 14:30	436.07			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	10/1/06 14:35	436.07			
SWPW-2	10/1/06 14:40	436.12			
SWPW-2	10/1/06 14:45	436.07			
SWPW-2	10/1/06 14:50	436.07			
SWPW-2	10/1/06 14:55	436.08			
SWPW-2	10/1/06 15:00	436.08			
SWPW-2	10/1/06 15:05	436.08			
SWPW-2	10/1/06 15:10	436.08			
SWPW-2	10/1/06 15:15	436.08			
SWPW-2	10/1/06 15:20	436.07			
SWPW-2	10/1/06 15:25	436.06			
SWPW-2	10/1/06 15:30	436.07			
SWPW-2	10/1/06 15:35	436.07			
SWPW-2	10/1/06 15:40	436.08			
SWPW-2	10/1/06 15:45	436.06			
SWPW-2	10/1/06 15:50	436.06			
SWPW-2	10/1/06 15:55	436.06			
SWPW-2	10/1/06 16:00	436.06			
SWPW-2	10/1/06 16:05	436.06			
SWPW-2	10/1/06 16:10	436.06			
SWPW-2	10/1/06 16:15	436.06			
SWPW-2	10/1/06 16:20	436.09			
SWPW-2	10/1/06 16:25	436.06			
SWPW-2	10/1/06 16:30	436.06			
SWPW-2	10/1/06 16:35	436.05			
SWPW-2	10/1/06 16:40	436.04			
SWPW-2	10/1/06 16:45	436.05			
SWPW-2	10/1/06 16:50	436.05			
SWPW-2	10/1/06 16:55	436.05			
SWPW-2	10/1/06 17:00	436.05			
SWPW-2	10/1/06 17:05	436.07			
SWPW-2	10/1/06 17:10	436.04			
SWPW-2	10/1/06 17:15	436.05			
SWPW-2	10/1/06 17:20	436.04			
SWPW-2	10/1/06 17:25	436.05			
SWPW-2	10/1/06 17:30	436.05			
SWPW-2	10/1/06 17:35	436.04			
SWPW-2	10/1/06 17:40	436.04			
SWPW-2	10/1/06 17:45	436.05			
SWPW-2	10/1/06 17:50	436.04			
SWPW-2	10/1/06 17:55	436.05			
SWPW-2	10/1/06 18:00	436.04			
SWPW-2	10/1/06 18:05	436.04			
SWPW-2	10/1/06 18:10	436.04			
SWPW-2	10/1/06 18:15	436.04			
SWPW-2	10/1/06 18:20	436.02			
SWPW-2	10/1/06 18:25	436.05			
SWPW-2	10/1/06 18:30	436.01			
SWPW-2	10/1/06 18:35	436.05			
SWPW-2	10/1/06 18:40	436.05			
SWPW-2	10/1/06 18:45	436.06			
SWPW-2	10/1/06 18:50	436.06			
SWPW-2	10/1/06 18:55	436.03			
SWPW-2	10/1/06 19:00	436.06			
SWPW-2	10/1/06 19:05	436.05			
SWPW-2	10/1/06 19:10	436.05			
SWPW-2	10/1/06 19:15	436.05			
SWPW-2	10/1/06 19:20	436.04			
SWPW-2	10/1/06 19:25	436.04			
SWPW-2	10/1/06 19:30	436.05			
SWPW-2	10/1/06 19:35	436.04			
SWPW-2	10/1/06 19:40	436.05			
SWPW-2	10/1/06 19:45	436.04			
SWPW-2	10/1/06 19:50	436.04			
SWPW-2	10/1/06 19:55	436.04			
SWPW-2	10/1/06 20:00	436.03			
SWPW-2	10/1/06 20:05	436.03			
SWPW-2	10/1/06 20:10	436.04			
SWPW-2	10/1/06 20:15	436.07			
SWPW-2	10/1/06 20:20	436.06			
SWPW-2	10/1/06 20:25	436.03			
SWPW-2	10/1/06 20:30	436.03			
SWPW-2	10/1/06 20:35	436.02			
SWPW-2	10/1/06 20:40	436.06			
SWPW-2	10/1/06 20:45	436.07			
SWPW-2	10/1/06 20:50	436.07			
SWPW-2	10/1/06 20:55	436.06			
SWPW-2	10/1/06 21:00	436.07			
SWPW-2	10/1/06 21:05	436.06			
SWPW-2	10/1/06 21:10	436.07			
SWPW-2	10/1/06 21:15	436.03			
SWPW-2	10/1/06 21:20	436.08			
SWPW-2	10/1/06 21:25	436.07			
SWPW-2	10/1/06 21:30	436.03			
SWPW-2	10/1/06 21:35	436.02			
SWPW-2	10/1/06 21:40	436.07			
SWPW-2	10/1/06 21:45	436.02			
SWPW-2	10/1/06 21:50	436.06			
SWPW-2	10/1/06 21:55	436.06			
SWPW-2	10/1/06 22:00	436.03			
SWPW-2	10/1/06 22:05	436.07			
SWPW-2	10/1/06 22:10	436.02			
SWPW-2	10/1/06 22:15	436.06			
SWPW-2	10/1/06 22:20	436.03			
SWPW-2	10/1/06 22:25	436.07			
SWPW-2	10/1/06 22:30	436.03			
SWPW-2	10/1/06 22:35	436.03			
SWPW-2	10/1/06 22:40	436.03			
SWPW-2	10/1/06 22:45	436.03			
SWPW-2	10/1/06 22:50	436.08			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	10/1/06 22:55	436.07			
SWPW-2	10/1/06 23:00	436.04			
SWPW-2	10/1/06 23:05	436.05			
SWPW-2	10/1/06 23:10	436.03			
SWPW-2	10/1/06 23:15	436.04			
SWPW-2	10/1/06 23:20	436.04			
SWPW-2	10/1/06 23:25	436.05			
SWPW-2	10/1/06 23:30	436.04			
SWPW-2	10/1/06 23:35	436.04			
SWPW-2	10/1/06 23:40	436.05			
SWPW-2	10/1/06 23:45	436.05			
SWPW-2	10/1/06 23:50	436.05			
SWPW-2	10/1/06 23:55	436.05			
SWPW-2	10/2/06 0:00	436.04			
SWPW-2	10/2/06 0:05	436.08			
SWPW-2	10/2/06 0:10	436.04			
SWPW-2	10/2/06 0:15	436.04			
SWPW-2	10/2/06 0:20	436.04			
SWPW-2	10/2/06 0:25	436.04			
SWPW-2	10/2/06 0:30	436.05			
SWPW-2	10/2/06 0:35	436.07			
SWPW-2	10/2/06 0:40	436.04			
SWPW-2	10/2/06 0:45	436.04			
SWPW-2	10/2/06 0:50	436.04			
SWPW-2	10/2/06 0:55	436.04			
SWPW-2	10/2/06 1:00	436.04			
SWPW-2	10/2/06 1:05	436.04			
SWPW-2	10/2/06 1:10	436.00			
SWPW-2	10/2/06 1:15	436.04			
SWPW-2	10/2/06 1:20	436.03			
SWPW-2	10/2/06 1:25	436.03			
SWPW-2	10/2/06 1:30	436.04			
SWPW-2	10/2/06 1:35	436.04			
SWPW-2	10/2/06 1:40	436.04			
SWPW-2	10/2/06 1:45	436.03			
SWPW-2	10/2/06 1:50	436.03			
SWPW-2	10/2/06 1:55	436.01			
SWPW-2	10/2/06 2:00	436.04			
SWPW-2	10/2/06 2:05	436.04			
SWPW-2	10/2/06 2:10	436.04			
SWPW-2	10/2/06 2:15	436.04			
SWPW-2	10/2/06 2:20	436.04			
SWPW-2	10/2/06 2:25	436.00			
SWPW-2	10/2/06 2:30	436.04			
SWPW-2	10/2/06 2:35	436.04			
SWPW-2	10/2/06 2:40	435.99			
SWPW-2	10/2/06 2:45	436.04			
SWPW-2	10/2/06 2:50	436.04			
SWPW-2	10/2/06 2:55	436.03			
SWPW-2	10/2/06 3:00	436.03			
SWPW-2	10/2/06 3:05	436.03			
SWPW-2	10/2/06 3:10	436.02			
SWPW-2	10/2/06 3:15	436.03			
SWPW-2	10/2/06 3:20	436.05			
SWPW-2	10/2/06 3:25	436.03			
SWPW-2	10/2/06 3:30	436.03			
SWPW-2	10/2/06 3:35	436.02			
SWPW-2	10/2/06 3:40	436.02			
SWPW-2	10/2/06 3:45	436.02			
SWPW-2	10/2/06 3:50	436.02			
SWPW-2	10/2/06 3:55	436.01			
SWPW-2	10/2/06 4:00	436.03			
SWPW-2	10/2/06 4:05	436.03			
SWPW-2	10/2/06 4:10	436.02			
SWPW-2	10/2/06 4:15	436.08			
SWPW-2	10/2/06 4:20	436.02			
SWPW-2	10/2/06 4:25	436.03			
SWPW-2	10/2/06 4:30	436.03			
SWPW-2	10/2/06 4:35	436.02			
SWPW-2	10/2/06 4:40	436.05			
SWPW-2	10/2/06 4:45	436.03			
SWPW-2	10/2/06 4:50	436.03			
SWPW-2	10/2/06 4:55	436.02			
SWPW-2	10/2/06 5:00	436.03			
SWPW-2	10/2/06 5:05	436.04			
SWPW-2	10/2/06 5:10	436.02			
SWPW-2	10/2/06 5:15	436.03			
SWPW-2	10/2/06 5:20	436.00			
SWPW-2	10/2/06 5:25	436.03			
SWPW-2	10/2/06 5:30	436.04			
SWPW-2	10/2/06 5:35	436.03			
SWPW-2	10/2/06 5:40	436.02			
SWPW-2	10/2/06 5:45	436.01			
SWPW-2	10/2/06 5:50	436.06			
SWPW-2	10/2/06 5:55	436.02			
SWPW-2	10/2/06 6:00	436.02			
SWPW-2	10/2/06 6:05	436.02			
SWPW-2	10/2/06 6:10	436.02			
SWPW-2	10/2/06 6:15	436.02			
SWPW-2	10/2/06 6:20	436.03			
SWPW-2	10/2/06 6:25	436.03			
SWPW-2	10/2/06 6:30	436.02			
SWPW-2	10/2/06 6:35	436.03			
SWPW-2	10/2/06 6:40	436.03			
SWPW-2	10/2/06 6:45	436.01			
SWPW-2	10/2/06 6:50	436.02			
SWPW-2	10/2/06 6:55	436.06			
SWPW-2	10/2/06 7:00	436.02			
SWPW-2	10/2/06 7:05	436.03			
SWPW-2	10/2/06 7:10	436.03			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	10/2/06 7:15	436.04			
SWPW-2	10/2/06 7:20	436.03			
SWPW-2	10/2/06 7:25	436.04			
SWPW-2	10/2/06 7:30	436.04			
SWPW-2	10/2/06 7:35	436.03			
SWPW-2	10/2/06 7:40	436.05			
SWPW-2	10/2/06 7:45	436.04			
SWPW-2	10/2/06 7:50	436.04			
SWPW-2	10/2/06 7:55	436.04			
SWPW-2	10/2/06 8:00	436.04			
SWPW-2	10/2/06 8:05	436.04			
SWPW-2	10/2/06 8:10	436.03			
SWPW-2	10/2/06 8:15	436.03			
SWPW-2	10/2/06 8:20	436.04			
SWPW-2	10/2/06 8:25	436.04			
SWPW-2	10/2/06 8:30	436.03			
SWPW-2	10/2/06 8:35	436.02			
SWPW-2	10/2/06 8:40	436.03			
SWPW-2	10/2/06 8:45	436.06			
SWPW-2	10/2/06 8:50	436.02			
SWPW-2	10/2/06 8:55	436.05			
SWPW-2	10/2/06 9:00	436.02			
SWPW-2	10/2/06 9:05	436.05			
SWPW-2	10/2/06 9:10	436.02			
SWPW-2	10/2/06 9:15	436.05			
SWPW-2	10/2/06 9:20	436.05			
SWPW-2	10/2/06 9:25	436.05			
SWPW-2	10/2/06 9:30	436.02			
SWPW-2	10/2/06 9:35	436.06			
SWPW-2	10/2/06 9:40	436.05			
SWPW-2	10/2/06 9:45	436.05			
SWPW-2	10/2/06 9:50	436.02			
SWPW-2	10/2/06 9:55	436.06			
SWPW-2	10/2/06 10:00	436.00			
SWPW-2	10/2/06 10:05	436.00			
SWPW-2	10/2/06 10:10	436.04			
SWPW-2	10/2/06 10:15	436.04			
SWPW-2	10/2/06 10:20	436.04			
SWPW-2	10/2/06 10:25	436.04			
SWPW-2	10/2/06 10:30	436.03			
SWPW-2	10/2/06 10:35	436.04			
SWPW-2	10/2/06 10:40	436.04			
SWPW-2	10/2/06 10:45	436.03			
SWPW-2	10/2/06 10:50	436.03			
SWPW-2	10/2/06 10:55	436.02			
SWPW-2	10/2/06 11:00	436.00			
SWPW-2	10/2/06 11:05	435.99			
SWPW-2	10/2/06 11:10	436.03			
SWPW-2	10/2/06 11:15	436.03			
SWPW-2	10/2/06 11:20	436.03			
SWPW-2	10/2/06 11:25	435.99			
SWPW-2	10/2/06 11:30	436.03			
SWPW-2	10/2/06 11:35	435.99			
SWPW-2	10/2/06 11:40	435.98			
SWPW-2	10/2/06 11:45	436.02			
SWPW-2	10/2/06 11:50	435.98			
SWPW-2	10/2/06 11:55	436.03			
SWPW-2	10/2/06 12:00	435.98			
SWPW-2	10/2/06 12:05	436.03			
SWPW-2	10/2/06 12:10	435.99			
SWPW-2	10/2/06 12:15	436.00			
SWPW-2	10/2/06 12:20	436.03			
SWPW-2	10/2/06 12:25	435.98			
SWPW-2	10/2/06 12:30	436.02			
SWPW-2	10/2/06 12:35	435.98			
SWPW-2	10/2/06 12:40	435.98			
SWPW-2	10/2/06 12:45	435.98			
SWPW-2	10/2/06 12:50	436.01			
SWPW-2	10/2/06 12:55	436.01			
SWPW-2	10/2/06 13:00	436.02			
SWPW-2	10/2/06 13:05	435.98			
SWPW-2	10/2/06 13:10	435.97			
SWPW-2	10/2/06 13:15	435.97			
SWPW-2	10/2/06 13:20	436.01			
SWPW-2	10/2/06 13:25	435.98			
SWPW-2	10/2/06 13:30	436.01			
SWPW-2	10/2/06 13:35	435.99			
SWPW-2	10/2/06 13:40	436.02			
SWPW-2	10/2/06 13:45	435.97			
SWPW-2	10/2/06 13:50	435.97			
SWPW-2	10/2/06 13:55	435.99			
SWPW-2	10/2/06 14:00	435.98			
SWPW-2	10/2/06 14:05	436.00			
SWPW-2	10/2/06 14:10	435.96			
SWPW-2	10/2/06 14:15	435.97			
SWPW-2	10/2/06 14:20	435.99			
SWPW-2	10/2/06 14:25	435.95			
SWPW-2	10/2/06 14:30	435.95			
SWPW-2	10/2/06 14:35	435.96			
SWPW-2	10/2/06 14:40	435.96			
SWPW-2	10/2/06 14:45	435.96			
SWPW-2	10/2/06 14:50	435.96			
SWPW-2	10/2/06 14:55	435.92			
SWPW-2	10/2/06 15:00	435.96			
SWPW-2	10/2/06 15:05	435.96			
SWPW-2	10/2/06 15:10	435.97			
SWPW-2	10/2/06 15:15	435.97			
SWPW-2	10/2/06 15:20	435.96			
SWPW-2	10/2/06 15:25	435.96			
SWPW-2	10/2/06 15:30	435.95			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	10/2/06 15:35	435.96			
SWPW-2	10/2/06 15:40	435.96			
SWPW-2	10/2/06 15:45	435.95			
SWPW-2	10/2/06 15:50	435.96			
SWPW-2	10/2/06 15:55	435.96			
SWPW-2	10/2/06 16:00	435.96			
SWPW-2	10/2/06 16:05	435.96			
SWPW-2	10/2/06 16:10	435.99			
SWPW-2	10/2/06 16:15	435.94			
SWPW-2	10/2/06 16:20	435.95			
SWPW-2	10/2/06 16:25	435.95			
SWPW-2	10/2/06 16:30	435.94			
SWPW-2	10/2/06 16:35	435.95			
SWPW-2	10/2/06 16:40	435.95			
SWPW-2	10/2/06 16:45	435.93			
SWPW-2	10/2/06 16:50	435.93			
SWPW-2	10/2/06 16:55	435.93			
SWPW-2	10/2/06 17:00	435.92			
SWPW-2	10/2/06 17:05	435.93			
SWPW-2	10/2/06 17:10	435.93			
SWPW-2	10/2/06 17:15	435.93			
SWPW-2	10/2/06 17:20	435.94			
SWPW-2	10/2/06 17:25	435.92			
SWPW-2	10/2/06 17:30	435.93			
SWPW-2	10/2/06 17:35	435.92			
SWPW-2	10/2/06 17:40	435.92			
SWPW-2	10/2/06 17:45	435.92			
SWPW-2	10/2/06 17:50	435.91			
SWPW-2	10/2/06 17:55	435.91			
SWPW-2	10/2/06 18:00	435.91			
SWPW-2	10/2/06 18:05	435.90			
SWPW-2	10/2/06 18:10	435.94			
SWPW-2	10/2/06 18:15	435.93			
SWPW-2	10/2/06 18:20	435.91			
SWPW-2	10/2/06 18:25	435.91			
SWPW-2	10/2/06 18:30	435.89			
SWPW-2	10/2/06 18:35	435.95			
SWPW-2	10/2/06 18:40	435.91			
SWPW-2	10/2/06 18:45	435.90			
SWPW-2	10/2/06 18:50	435.90			
SWPW-2	10/2/06 18:55	435.90			
SWPW-2	10/2/06 19:00	435.90			
SWPW-2	10/2/06 19:05	435.92			
SWPW-2	10/2/06 19:10	435.91			
SWPW-2	10/2/06 19:15	435.90			
SWPW-2	10/2/06 19:20	435.91			
SWPW-2	10/2/06 19:25	435.92			
SWPW-2	10/2/06 19:30	435.92			
SWPW-2	10/2/06 19:35	435.91			
SWPW-2	10/2/06 19:40	435.92			
SWPW-2	10/2/06 19:45	435.92			
SWPW-2	10/2/06 19:50	435.91			
SWPW-2	10/2/06 19:55	435.92			
SWPW-2	10/2/06 20:00	435.92			
SWPW-2	10/2/06 20:05	435.91			
SWPW-2	10/2/06 20:10	435.92			
SWPW-2	10/2/06 20:15	435.91			
SWPW-2	10/2/06 20:20	435.91			
SWPW-2	10/2/06 20:25	435.90			
SWPW-2	10/2/06 20:30	435.91			
SWPW-2	10/2/06 20:35	435.95			
SWPW-2	10/2/06 20:40	435.91			
SWPW-2	10/2/06 20:45	435.91			
SWPW-2	10/2/06 20:50	435.91			
SWPW-2	10/2/06 20:55	435.91			
SWPW-2	10/2/06 21:00	435.92			
SWPW-2	10/2/06 21:05	435.92			
SWPW-2	10/2/06 21:10	435.91			
SWPW-2	10/2/06 21:15	435.91			
SWPW-2	10/2/06 21:20	435.91			
SWPW-2	10/2/06 21:25	435.92			
SWPW-2	10/2/06 21:30	435.92			
SWPW-2	10/2/06 21:35	435.92			
SWPW-2	10/2/06 21:40	435.91			
SWPW-2	10/2/06 21:45	435.91			
SWPW-2	10/2/06 21:50	435.90			
SWPW-2	10/2/06 21:55	435.91			
SWPW-2	10/2/06 22:00	435.90			
SWPW-2	10/2/06 22:05	435.95			
SWPW-2	10/2/06 22:10	435.91			
SWPW-2	10/2/06 22:15	435.92			
SWPW-2	10/2/06 22:20	435.91			
SWPW-2	10/2/06 22:25	435.91			
SWPW-2	10/2/06 22:30	435.91			
SWPW-2	10/2/06 22:35	435.91			
SWPW-2	10/2/06 22:40	435.92			
SWPW-2	10/2/06 22:45	435.91			
SWPW-2	10/2/06 22:50	435.91			
SWPW-2	10/2/06 22:55	435.91			
SWPW-2	10/2/06 23:00	435.91			
SWPW-2	10/2/06 23:05	435.91			
SWPW-2	10/2/06 23:10	435.88			
SWPW-2	10/2/06 23:15	435.91			
SWPW-2	10/2/06 23:20	435.91			
SWPW-2	10/2/06 23:25	435.92			
SWPW-2	10/2/06 23:30	435.93			
SWPW-2	10/2/06 23:35	435.91			
SWPW-2	10/2/06 23:40	435.91			
SWPW-2	10/2/06 23:45	435.91			
SWPW-2	10/2/06 23:50	435.91			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	10/2/06 23:55	435.91			
SWPW-2	10/3/06 0:00	435.90			
SWPW-2	10/3/06 0:05	435.90			
SWPW-2	10/3/06 0:10	435.90			
SWPW-2	10/3/06 0:15	435.90			
SWPW-2	10/3/06 0:20	435.90			
SWPW-2	10/3/06 0:25	435.90			
SWPW-2	10/3/06 0:30	435.89			
SWPW-2	10/3/06 0:35	435.87			
SWPW-2	10/3/06 0:40	435.90			
SWPW-2	10/3/06 0:45	435.91			
SWPW-2	10/3/06 0:50	435.91			
SWPW-2	10/3/06 0:55	435.90			
SWPW-2	10/3/06 1:00	435.92			
SWPW-2	10/3/06 1:05	435.91			
SWPW-2	10/3/06 1:10	435.89			
SWPW-2	10/3/06 1:15	435.90			
SWPW-2	10/3/06 1:20	435.90			
SWPW-2	10/3/06 1:25	435.90			
SWPW-2	10/3/06 1:30	435.90			
SWPW-2	10/3/06 1:35	435.90			
SWPW-2	10/3/06 1:40	435.89			
SWPW-2	10/3/06 1:45	435.89			
SWPW-2	10/3/06 1:50	435.90			
SWPW-2	10/3/06 1:55	435.90			
SWPW-2	10/3/06 2:00	435.89			
SWPW-2	10/3/06 2:05	435.89			
SWPW-2	10/3/06 2:10	435.89			
SWPW-2	10/3/06 2:15	435.88			
SWPW-2	10/3/06 2:20	435.88			
SWPW-2	10/3/06 2:25	435.88			
SWPW-2	10/3/06 2:30	435.88			
SWPW-2	10/3/06 2:35	435.88			
SWPW-2	10/3/06 2:40	435.88			
SWPW-2	10/3/06 2:45	435.87			
SWPW-2	10/3/06 2:50	435.89			
SWPW-2	10/3/06 2:55	435.86			
SWPW-2	10/3/06 3:00	435.85			
SWPW-2	10/3/06 3:05	435.89			
SWPW-2	10/3/06 3:10	435.85			
SWPW-2	10/3/06 3:15	435.88			
SWPW-2	10/3/06 3:20	435.85			
SWPW-2	10/3/06 3:25	435.89			
SWPW-2	10/3/06 3:30	435.84			
SWPW-2	10/3/06 3:35	435.85			
SWPW-2	10/3/06 3:40	435.87			
SWPW-2	10/3/06 3:45	435.85			
SWPW-2	10/3/06 3:50	435.84			
SWPW-2	10/3/06 3:55	435.85			
SWPW-2	10/3/06 4:00	435.89			
SWPW-2	10/3/06 4:05	435.87			
SWPW-2	10/3/06 4:10	435.86			
SWPW-2	10/3/06 4:15	435.85			
SWPW-2	10/3/06 4:20	435.85			
SWPW-2	10/3/06 4:25	435.85			
SWPW-2	10/3/06 4:30	435.86			
SWPW-2	10/3/06 4:35	435.85			
SWPW-2	10/3/06 4:40	435.85			
SWPW-2	10/3/06 4:45	435.84			
SWPW-2	10/3/06 4:50	435.84			
SWPW-2	10/3/06 4:55	435.85			
SWPW-2	10/3/06 5:00	435.86			
SWPW-2	10/3/06 5:05	435.85			
SWPW-2	10/3/06 5:10	435.85			
SWPW-2	10/3/06 5:15	435.86			
SWPW-2	10/3/06 5:20	435.86			
SWPW-2	10/3/06 5:25	435.85			
SWPW-2	10/3/06 5:30	435.85			
SWPW-2	10/3/06 5:35	435.85			
SWPW-2	10/3/06 5:40	435.86			
SWPW-2	10/3/06 5:45	435.84			
SWPW-2	10/3/06 5:50	435.84			
SWPW-2	10/3/06 5:55	435.84			
SWPW-2	10/3/06 6:00	435.80			
SWPW-2	10/3/06 6:05	435.84			
SWPW-2	10/3/06 6:10	435.85			
SWPW-2	10/3/06 6:15	435.84			
SWPW-2	10/3/06 6:20	435.86			
SWPW-2	10/3/06 6:25	435.86			
SWPW-2	10/3/06 6:30	435.84			
SWPW-2	10/3/06 6:35	435.84			
SWPW-2	10/3/06 6:40	435.81			
SWPW-2	10/3/06 6:45	435.83			
SWPW-2	10/3/06 6:50	435.85			
SWPW-2	10/3/06 6:55	435.85			
SWPW-2	10/3/06 7:00	435.81			
SWPW-2	10/3/06 7:05	435.85			
SWPW-2	10/3/06 7:10	435.86			
SWPW-2	10/3/06 7:15	435.86			
SWPW-2	10/3/06 7:20	435.87			
SWPW-2	10/3/06 7:25	435.86			
SWPW-2	10/3/06 7:30	435.86			
SWPW-2	10/3/06 7:35	435.86			
SWPW-2	10/3/06 7:40	435.87			
SWPW-2	10/3/06 7:45	435.87			
SWPW-2	10/3/06 7:50	435.86			
SWPW-2	10/3/06 7:55	435.86			
SWPW-2	10/3/06 8:00	435.87			
SWPW-2	10/3/06 8:05	435.90			
SWPW-2	10/3/06 8:10	435.91			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	10/3/06 8:15	435.90			
SWPW-2	10/3/06 8:20	435.90			
SWPW-2	10/3/06 8:25	435.87			
SWPW-2	10/3/06 8:30	435.87			
SWPW-2	10/3/06 8:35	435.83			
SWPW-2	10/3/06 8:40	435.87			
SWPW-2	10/3/06 8:45	435.88			
SWPW-2	10/3/06 8:50	435.87			
SWPW-2	10/3/06 8:55	435.88			
SWPW-2	10/3/06 9:00	435.86			
SWPW-2	10/3/06 9:05	435.87			
SWPW-2	10/3/06 9:10	435.88			
SWPW-2	10/3/06 9:15	435.87			
SWPW-2	10/3/06 9:20	435.87			
SWPW-2	10/3/06 9:25	435.88			
SWPW-2	10/3/06 9:30	435.90			
SWPW-2	10/3/06 9:35	435.89			
SWPW-2	10/3/06 9:40	435.88			
SWPW-2	10/3/06 9:45	435.90			
SWPW-2	10/3/06 9:50	435.89			
SWPW-2	10/3/06 9:55	435.90			
SWPW-2	10/3/06 10:00	435.90			
SWPW-2	10/3/06 10:05	435.89			
SWPW-2	10/3/06 10:10	435.89			
SWPW-2	10/3/06 10:15	435.89			
SWPW-2	10/3/06 10:20	435.89			
SWPW-2	10/3/06 10:25	435.94			
SWPW-2	10/3/06 10:30	435.93			
SWPW-2	10/3/06 10:35	435.88			
SWPW-2	10/3/06 10:40	435.90			
SWPW-2	10/3/06 10:45	435.89			
SWPW-2	10/3/06 10:50	435.92			
SWPW-2	10/3/06 10:55	435.91			
SWPW-2	10/3/06 11:00	435.90			
SWPW-2	10/3/06 11:05	435.90			
SWPW-2	10/3/06 11:10	435.90			
SWPW-2	10/3/06 11:15	435.90			
SWPW-2	10/3/06 11:20	435.91			
SWPW-2	10/3/06 11:25	435.90			
SWPW-2	10/3/06 11:30	435.91			
SWPW-2	10/3/06 11:35	435.91			
SWPW-2	10/3/06 11:40	435.89			
SWPW-2	10/3/06 11:45	435.90			
SWPW-2	10/3/06 11:50	435.90			
SWPW-2	10/3/06 11:55	435.93			
SWPW-2	10/3/06 12:00	435.90			
SWPW-2	10/3/06 12:05	435.89			
SWPW-2	10/3/06 12:10	435.90			
SWPW-2	10/3/06 12:15	435.93			
SWPW-2	10/3/06 12:20	435.89			
SWPW-2	10/3/06 12:25	435.88			
SWPW-2	10/3/06 12:30	435.89			
SWPW-2	10/3/06 12:35	435.89			
SWPW-2	10/3/06 12:40	435.90			
SWPW-2	10/3/06 12:45	435.89			
SWPW-2	10/3/06 12:50	435.92			
SWPW-2	10/3/06 12:55	435.88			
SWPW-2	10/3/06 13:00	435.92			
SWPW-2	10/3/06 13:05	435.90			
SWPW-2	10/3/06 13:10	435.90			
SWPW-2	10/3/06 13:15	435.88			
SWPW-2	10/3/06 13:20	435.88			
SWPW-2	10/3/06 13:25	435.87			
SWPW-2	10/3/06 13:30	435.88			
SWPW-2	10/3/06 13:35	435.88			
SWPW-2	10/3/06 13:40	435.87			
SWPW-2	10/3/06 13:45	435.88			
SWPW-2	10/3/06 13:50	435.88			
SWPW-2	10/3/06 13:55	435.89			
SWPW-2	10/3/06 14:00	435.89			
SWPW-2	10/3/06 14:05	435.88			
SWPW-2	10/3/06 14:10	435.86			
SWPW-2	10/3/06 14:15	435.90			
SWPW-2	10/3/06 14:20	435.89			
SWPW-2	10/3/06 14:25	435.89			
SWPW-2	10/3/06 14:30	435.85			
SWPW-2	10/3/06 14:35	435.89			
SWPW-2	10/3/06 14:40	435.86			
SWPW-2	10/3/06 14:45	435.86			
SWPW-2	10/3/06 14:50	435.90			
SWPW-2	10/3/06 14:55	435.88			
SWPW-2	10/3/06 15:00	435.85			
SWPW-2	10/3/06 15:05	435.88			
SWPW-2	10/3/06 15:10	435.88			
SWPW-2	10/3/06 15:15	435.87			
SWPW-2	10/3/06 15:20	435.89			
SWPW-2	10/3/06 15:25	435.87			
SWPW-2	10/3/06 15:30	435.88			
SWPW-2	10/3/06 15:35	435.88			
SWPW-2	10/3/06 15:40	435.87			
SWPW-2	10/3/06 15:45	435.87			
SWPW-2	10/3/06 15:50	435.87			
SWPW-2	10/3/06 15:55	435.87			
SWPW-2	10/3/06 16:00	435.88			
SWPW-2	10/3/06 16:05	435.87			
SWPW-2	10/3/06 16:10	435.88			
SWPW-2	10/3/06 16:15	435.83			
SWPW-2	10/3/06 16:20	435.88			
SWPW-2	10/3/06 16:25	435.88			
SWPW-2	10/3/06 16:30	435.86			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	10/3/06 16:35	435.84			
SWPW-2	10/3/06 16:40	435.88			
SWPW-2	10/3/06 16:45	435.84			
SWPW-2	10/3/06 16:50	435.85			
SWPW-2	10/3/06 16:55	435.86			
SWPW-2	10/3/06 17:00	435.84			
SWPW-2	10/3/06 17:05	435.84			
SWPW-2	10/3/06 17:10	435.86			
SWPW-2	10/3/06 17:15	435.84			
SWPW-2	10/3/06 17:20	435.85			
SWPW-2	10/3/06 17:25	435.85			
SWPW-2	10/3/06 17:30	435.85			
SWPW-2	10/3/06 17:35	435.89			
SWPW-2	10/3/06 17:40	435.86			
SWPW-2	10/3/06 17:45	435.85			
SWPW-2	10/3/06 17:50	435.85			
SWPW-2	10/3/06 17:55	435.88			
SWPW-2	10/3/06 18:00	435.86			
SWPW-2	10/3/06 18:05	435.86			
SWPW-2	10/3/06 18:10	435.86			
SWPW-2	10/3/06 18:15	435.85			
SWPW-2	10/3/06 18:20	435.87			
SWPW-2	10/3/06 18:25	435.86			
SWPW-2	10/3/06 18:30	435.86			
SWPW-2	10/3/06 18:35	435.87			
SWPW-2	10/3/06 18:40	435.87			
SWPW-2	10/3/06 18:45	435.86			
SWPW-2	10/3/06 18:50	435.86			
SWPW-2	10/3/06 18:55	435.87			
SWPW-2	10/3/06 19:00	435.86			
SWPW-2	10/3/06 19:05	435.86			
SWPW-2	10/3/06 19:10	435.87			
SWPW-2	10/3/06 19:15	435.86			
SWPW-2	10/3/06 19:20	435.91			
SWPW-2	10/3/06 19:25	435.87			
SWPW-2	10/3/06 19:30	435.86			
SWPW-2	10/3/06 19:35	435.88			
SWPW-2	10/3/06 19:40	435.88			
SWPW-2	10/3/06 19:45	435.88			
SWPW-2	10/3/06 19:50	435.88			
SWPW-2	10/3/06 19:55	435.88			
SWPW-2	10/3/06 20:00	435.87			
SWPW-2	10/3/06 20:05	435.89			
SWPW-2	10/3/06 20:10	435.89			
SWPW-2	10/3/06 20:15	435.89			
SWPW-2	10/3/06 20:20	435.89			
SWPW-2	10/3/06 20:25	435.88			
SWPW-2	10/3/06 20:30	435.89			
SWPW-2	10/3/06 20:35	435.89			
SWPW-2	10/3/06 20:40	435.90			
SWPW-2	10/3/06 20:45	435.89			
SWPW-2	10/3/06 20:50	435.87			
SWPW-2	10/3/06 20:55	435.91			
SWPW-2	10/3/06 21:00	435.88			
SWPW-2	10/3/06 21:05	435.87			
SWPW-2	10/3/06 21:10	435.91			
SWPW-2	10/3/06 21:15	435.88			
SWPW-2	10/3/06 21:20	435.91			
SWPW-2	10/3/06 21:25	435.91			
SWPW-2	10/3/06 21:30	435.87			
SWPW-2	10/3/06 21:35	435.92			
SWPW-2	10/3/06 21:40	435.92			
SWPW-2	10/3/06 21:45	435.91			
SWPW-2	10/3/06 21:50	435.91			
SWPW-2	10/3/06 21:55	435.92			
SWPW-2	10/3/06 22:00	435.91			
SWPW-2	10/3/06 22:05	435.92			
SWPW-2	10/3/06 22:10	435.91			
SWPW-2	10/3/06 22:15	435.92			
SWPW-2	10/3/06 22:20	435.88			
SWPW-2	10/3/06 22:25	435.92			
SWPW-2	10/3/06 22:30	435.91			
SWPW-2	10/3/06 22:35	435.92			
SWPW-2	10/3/06 22:40	435.93			
SWPW-2	10/3/06 22:45	435.92			
SWPW-2	10/3/06 22:50	435.87			
SWPW-2	10/3/06 22:55	435.89			
SWPW-2	10/3/06 23:00	435.91			
SWPW-2	10/3/06 23:05	435.92			
SWPW-2	10/3/06 23:10	435.92			
SWPW-2	10/3/06 23:15	435.92			
SWPW-2	10/3/06 23:20	435.88			
SWPW-2	10/3/06 23:25	435.88			
SWPW-2	10/3/06 23:30	435.93			
SWPW-2	10/3/06 23:35	435.89			
SWPW-2	10/3/06 23:40	435.89			
SWPW-2	10/3/06 23:45	435.92			
SWPW-2	10/3/06 23:50	435.88			
SWPW-2	10/3/06 23:55	435.89			
SWPW-2	10/4/06 0:00	435.93			
SWPW-2	10/4/06 0:05	435.91			
SWPW-2	10/4/06 0:10	435.89			
SWPW-2	10/4/06 0:15	435.89			
SWPW-2	10/4/06 0:20	435.89			
SWPW-2	10/4/06 0:25	435.88			
SWPW-2	10/4/06 0:30	435.88			
SWPW-2	10/4/06 0:35	435.89			
SWPW-2	10/4/06 0:40	435.89			
SWPW-2	10/4/06 0:45	435.89			
SWPW-2	10/4/06 0:50	435.89			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	10/4/06 0:55	435.89			
SWPW-2	10/4/06 1:00	435.89			
SWPW-2	10/4/06 1:05	435.87			
SWPW-2	10/4/06 1:10	435.87			
SWPW-2	10/4/06 1:15	435.86			
SWPW-2	10/4/06 1:20	435.87			
SWPW-2	10/4/06 1:25	435.87			
SWPW-2	10/4/06 1:30	435.91			
SWPW-2	10/4/06 1:35	435.92			
SWPW-2	10/4/06 1:40	435.87			
SWPW-2	10/4/06 1:45	435.88			
SWPW-2	10/4/06 1:50	435.88			
SWPW-2	10/4/06 1:55	435.88			
SWPW-2	10/4/06 2:00	435.88			
SWPW-2	10/4/06 2:05	435.87			
SWPW-2	10/4/06 2:10	435.87			
SWPW-2	10/4/06 2:15	435.87			
SWPW-2	10/4/06 2:20	435.87			
SWPW-2	10/4/06 2:25	435.87			
SWPW-2	10/4/06 2:30	435.86			
SWPW-2	10/4/06 2:35	435.86			
SWPW-2	10/4/06 2:40	435.87			
SWPW-2	10/4/06 2:45	435.87			
SWPW-2	10/4/06 2:50	435.86			
SWPW-2	10/4/06 2:55	435.86			
SWPW-2	10/4/06 3:00	435.86			
SWPW-2	10/4/06 3:05	435.87			
SWPW-2	10/4/06 3:10	435.85			
SWPW-2	10/4/06 3:15	435.85			
SWPW-2	10/4/06 3:20	435.85			
SWPW-2	10/4/06 3:25	435.88			
SWPW-2	10/4/06 3:30	435.83			
SWPW-2	10/4/06 3:35	435.83			
SWPW-2	10/4/06 3:40	435.83			
SWPW-2	10/4/06 3:45	435.86			
SWPW-2	10/4/06 3:50	435.83			
SWPW-2	10/4/06 3:55	435.87			
SWPW-2	10/4/06 4:00	435.82			
SWPW-2	10/4/06 4:05	435.82			
SWPW-2	10/4/06 4:10	435.83			
SWPW-2	10/4/06 4:15	435.86			
SWPW-2	10/4/06 4:20	435.82			
SWPW-2	10/4/06 4:25	435.82			
SWPW-2	10/4/06 4:30	435.85			
SWPW-2	10/4/06 4:35	435.82			
SWPW-2	10/4/06 4:40	435.82			
SWPW-2	10/4/06 4:45	435.82			
SWPW-2	10/4/06 4:50	435.82			
SWPW-2	10/4/06 4:55	435.82			
SWPW-2	10/4/06 5:00	435.82			
SWPW-2	10/4/06 5:05	435.83			
SWPW-2	10/4/06 5:10	435.82			
SWPW-2	10/4/06 5:15	435.83			
SWPW-2	10/4/06 5:20	435.82			
SWPW-2	10/4/06 5:25	435.82			
SWPW-2	10/4/06 5:30	435.81			
SWPW-2	10/4/06 5:35	435.86			
SWPW-2	10/4/06 5:40	435.82			
SWPW-2	10/4/06 5:45	435.83			
SWPW-2	10/4/06 5:50	435.82			
SWPW-2	10/4/06 5:55	435.83			
SWPW-2	10/4/06 6:00	435.82			
SWPW-2	10/4/06 6:05	435.86			
SWPW-2	10/4/06 6:10	435.82			
SWPW-2	10/4/06 6:15	435.83			
SWPW-2	10/4/06 6:20	435.82			
SWPW-2	10/4/06 6:25	435.83			
SWPW-2	10/4/06 6:30	435.83			
SWPW-2	10/4/06 6:35	435.82			
SWPW-2	10/4/06 6:40	435.82			
SWPW-2	10/4/06 6:45	435.82			
SWPW-2	10/4/06 6:50	435.82			
SWPW-2	10/4/06 6:55	435.82			
SWPW-2	10/4/06 7:00	435.82			
SWPW-2	10/4/06 7:05	435.82			
SWPW-2	10/4/06 7:10	435.83			
SWPW-2	10/4/06 7:15	435.87			
SWPW-2	10/4/06 7:20	435.84			
SWPW-2	10/4/06 7:25	435.83			
SWPW-2	10/4/06 7:30	435.84			
SWPW-2	10/4/06 7:35	435.84			
SWPW-2	10/4/06 7:40	435.84			
SWPW-2	10/4/06 7:45	435.85			
SWPW-2	10/4/06 7:50	435.84			
SWPW-2	10/4/06 7:55	435.84			
SWPW-2	10/4/06 8:00	435.85			
SWPW-2	10/4/06 8:05	435.85			
SWPW-2	10/4/06 8:10	435.84			
SWPW-2	10/4/06 8:15	435.84			
SWPW-2	10/4/06 8:20	435.84			
SWPW-2	10/4/06 8:25	435.89			
SWPW-2	10/4/06 8:30	435.84			
SWPW-2	10/4/06 8:35	435.85			
SWPW-2	10/4/06 8:40	435.84			
SWPW-2	10/4/06 8:45	435.85			
SWPW-2	10/4/06 8:50	435.88			
SWPW-2	10/4/06 8:55	435.84			
SWPW-2	10/4/06 9:00	435.85			
SWPW-2	10/4/06 9:05	435.85			
SWPW-2	10/4/06 9:10	435.84			

Location	Date	DTH2O SWPW-2	Location	Date	DTH2O SWPW-1
SWPW-2	10/4/06 9:15	435.85			
SWPW-2	10/4/06 9:20	435.85			
SWPW-2	10/4/06 9:25	435.88			
SWPW-2	10/4/06 9:30	435.84			
SWPW-2	10/4/06 9:35	435.85			
SWPW-2	10/4/06 9:40	435.85			
SWPW-2	10/4/06 9:45	435.85			
SWPW-2	10/4/06 9:50	435.84			
SWPW-2	10/4/06 9:55	435.85			
SWPW-2	10/4/06 10:00	435.89			
SWPW-2	10/4/06 10:05	435.84			
SWPW-2	10/4/06 10:10	435.85			
SWPW-2	10/4/06 10:15	435.85			
SWPW-2	10/4/06 10:20	435.85			
SWPW-2	10/4/06 10:25	435.88			
SWPW-2	10/4/06 10:30	435.85			

APPENDIX E
ALL WATER LEVEL DATA (CD-ROM)
(Tests 1 and 2)