

pred

REGULATORY INFORMATION DISTRIBUTION SYSTEM (RIDS)

ACCESSION NBR: 8212290231 DOC. DATE: 82/12/23 NOTARIZED: NO DOCKET #
 FACIL: 50-275 Diablo Canyon Nuclear Power Plant, Unit 1, Pacific Ga 05000275
 AUTH. NAME AUTHOR AFFILIATION
 KRECHTING, J. E. Stone & Webster Engineering Corp.
 RECIP. NAME RECIPIENT AFFILIATION
 DENTON, H. R. Office of Nuclear Reactor Regulation, Director
 ENGELKEN, R. H. Region 3, Office of Director
 MANEATIS, G. A.

SUBJECT: Forwards Interim Technical Repts 24, 25 & 26, "Verification of 4160-Volt Safety-Related Electrical Distribution Sys Design Review," "Verification of Auxiliary Feedwater Sys Electrical Design" & "Verification of Control Room..." ^{565 rpts}

DISTRIBUTION CODE: D013S COPIES RECEIVED: LTR 7 ENCL 24 SIZE: 1+60
 TITLE: Diablo Canyon (50-275) Independent Design Verification Program

NOTES: J Hanchett 1cy PDR Documents. 05000275
 Limited Dist.

	RECIPIENT ID CODE/NAME	COPIES		RECIPIENT ID CODE/NAME	COPIES	
		LTR	ENCL		LTR	ENCL
	NRR LB3 BC	1	0	NRR LB3 LA	1	1
	BUCKLEY, B. 06	1	1			
INTERNAL:	ELD/HDS1	1	0	IE/DEP/EPLB	11	1
	IE/DEQA DIR	1	1	IE/DRP DIR		1
	NRR SCHIERLING	1	1	NRR/DE/CEB	12	1
	NRR/DE/eqb 13	1	1	NRR/DE/GB	14	1
	NRR/DE/MEB 15	2	2	NRR/DE/QAB	16	1
	NRR/DE/SEB 17	1	1	NRR/DSI/ASB	18	1
	NRR/DSI/ICSB	1	1	NRR/DSI/PSB		1
	REG FILE 04	1	1	RGNS	08	2
	RM/DDAMI/MIB	1	0			
EXTERNAL:	ACRS	19	16	FEMA-REP DIV		1
	LPDR	03	2	NRC PDR	02	1
	NSIC	05	1	NTIS		1
NOTES:		1	1			

1950

THE UNIVERSITY OF CHICAGO
DEPARTMENT OF CHEMISTRY
530 SOUTH EAST ASIAN AVENUE
CHICAGO, ILLINOIS 60607

RECEIVED
JAN 10 1950

TO THE DIRECTOR OF THE UNIVERSITY OF CHICAGO

1950

1950

DATE	INITIALS	DESCRIPTION	AMOUNT	REMARKS
1	I
2	I
3	I
4	I
5	I
6	I
7	I
8	I
9	I
10	I
11	I
12	I
13	I
14	I
15	I
16	I
17	I
18	I
19	I
20	I
21	I
22	I
23	I
24	I
25	I
26	I
27	I
28	I
29	I
30	I

STONE & WEBSTER ENGINEERING CORPORATION

245 SUMMER STREET, BOSTON, MASSACHUSETTS

ADDRESS ALL CORRESPONDENCE TO P.O. BOX 2325, BOSTON, MASS. 02107

W.U. TELEX: 94-0001
94-0977

BOSTON
NEW YORK
CHERRY HILL, N.J.
DENVER
CHICAGO
HOUSTON
PORTLAND, OREGON
SAN DIEGO
WASHINGTON, D.C.

DESIGN
CONSTRUCTION
REPORTS
EXAMINATIONS
CONSULTING
ENGINEERING

Mr. G.A. Maneatis, Executive Vice President
Facilities Development
Pacific Gas and Electric Company
77 Beale Street
San Francisco, CA 94106

December 23, 1982
J.O. No. 14296
DCS-212

Mr. H.R. Denton, Director
Office of Nuclear Reactor Regulation
U.S. Nuclear Regulatory Commission
Washington, DC 20555

Mr. R.H. Engelken, Regional Administrator
Region V
U.S. Nuclear Regulatory Commission
1450 Maria Lane, Suite 210
Walnut Creek, CA 94596

Docket No. 50-275
Diablo Canyon Unit 1
License No. DPR-76

SWEC INTERIM TECHNICAL REPORT

Gentlemen:

Attached are Interim Technical Reports, Number 24, Revision 0, entitled "Verification of the 4160 V Safety-Related Electrical Distribution System Design Review", Number 25, Revision 0, entitled "Verification of the Auxiliary Feedwater System Electrical Design", Number 26, Revision 0, entitled "Verification of the Control Room Ventilation and Pressurization System Electrical Design".

Very truly yours,

John E. Krechting
J.E. Krechting
Project Engineer, Diablo Canyon Nuclear Power Plant

Enclosures

cc: RRFray (45)
RFReedy
ETDenison
WECOoper (10)
HSchierling (40)

HBBrown
DFFleischaker
JRReynolds
BNorton
ACGehr

DO13
1/24
Limited Dist

8212290231 821223
PDR ADOCK 05000275
P PDR



PROGRAM MANAGER'S PREFACE

DIABLO CANYON NUCLEAR POWER PLANT - UNIT I

INDEPENDENT DESIGN VERIFICATION PROGRAM

INTERIM TECHNICAL REPORT


VERIFICATION OF THE AUXILIARY FEEDWATER SYSTEM
ELECTRICAL DESIGN

This is the twenty-fifth of a series of Interim Technical Reports prepared by the DCNPP-IDVP for the purpose of providing a conclusion of the program.

This report provides the analytical results, recommendations and conclusions of the IDVP with respect to the initial sample.

As IDVP Program Manager, Teledyne Engineering Services has approved this ITR including the conclusions and recommendations. The methodology followed by TES in performing this review and evaluation is described by Appendix C to this report.

ITR Reviewed and Approved
IDVP Program Manager
Teledyne Engineering Services

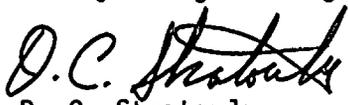
D. C. Stratouly
Assistant Project Manager

8212290231




TABLE OF CONTENTS

<u>SECTION</u>	<u>TITLE</u>	<u>PAGE</u>
	PROGRAM MANAGER'S PREFACE	
1.0	INTRODUCTION	1
2.0	DEFINITION OF ITEMS REVIEWED	1
2.1	Terminal Voltage on Power Circuits	1
2.1	Sizing of Cable and Raceway for Power Circuits	1
2.3	Relay and Protective Device Settings for Power Circuits	1
2.4	Electrical Equipment Separation and Redundancy	1
2.5	Environmental Qualification of Electrical Equipment	2
3.0	DESCRIPTION OF REVIEW	2
3.1	Terminal Voltage on Power Circuits	2
3.2	Sizing of Cable and Raceway for Power Circuits	3
3.3	Relay and Protective Device Settings for Power Circuits	3
3.4	Electrical Equipment Separation and Redundancy	3
3.5	Environmental Qualification of Electrical Equipment	4
4.0	SUMMARY OF REVIEW RESULTS	4
4.1	Terminal Voltage on Power Circuits	4
4.2	Sizing of Cable and Raceway for Power Circuits	5
4.3	Relay and Protective Device Settings for Power Circuits	5
4.4	Electrical Equipment Separation and Redundancy	5
4.5	Environmental Qualification of Electrical Equipment	5
4.6	EOI Reports Issued	5
5.0	EVALUATION OF REVIEW RESULTS	6
5.1	Terminal Voltage on Power Circuits	6
5.2	Sizing of Cable and Raceway for Power Circuits	6
5.3	Relay and Protective Device Settings for Power Circuits	6
5.4	Electrical Equipment Separation and Redundancy	7
5.5	Environmental Qualification of Electrical Equipment	7





TABLE OF CONTENTS

<u>SECTION</u>	<u>TITLE</u>	<u>PAGE</u>
6.0	CONCLUSIONS	7
6.1	Terminal Voltage on Power Circuits	7
6.2	Sizing of Cable and Raceway for Power Circuits	7
6.3	Relay and Protective Device Settings for Power Circuits .	8
6.4	Electrical Equipment Separation and Redundancy	8
6.5	Environmental Qualification of Electrical Equipment . . .	8

Appendices

- A. References
- B. EOI Files
- C. Program Manager's Assessment



1.0 INTRODUCTION

Stone & Webster Engineering Corporation (SWEC) has reviewed the design of the Auxiliary Feedwater (AFW) system. This review was performed in accordance with the SWEC scope of work in Appendix D (DCNPP-IDVP-PP-002) of the IDVP Phase II Program Management Plan issued by Teledyne Engineering Services (TES) as IDVP Program Manager. The review included terminal voltages, cable and raceway sizing, relay and protective device settings, cable and equipment separation, and harsh environment equipment qualification.

2.0 DEFINITION OF ITEMS REVIEWED

2.1 Terminal Voltage on Power Circuits

The voltages required at the 4160 V and 480 V buses to provide adequate voltage at motor terminals for all design conditions were reviewed.

Documentation was reviewed to determine whether 4 kV and 460 V motors have the capability to start and accelerate the load to rated speed with 80 percent voltage applied at the motor terminals.

2.2 Sizing of Cable and Raceway for Power Circuits


The ampacities of cables supplying power to 4 kV and 460 V safety-related equipment were reviewed.

2.3 Relay and Protective Device Settings for Power Circuits

The protective devices for the AFW power circuits were verified and the suitability of their settings was reviewed.

2.4 Electrical Equipment Separation and Redundancy

Electrical redundancy of power sources for electrical devices was reviewed. Cable and raceway separation was reviewed.



2.5 Environmental Qualification of Electrical Equipment

Environmental qualification of equipment required to be qualified for a harsh environment was reviewed.

3.0 DESCRIPTION OF REVIEW

The review was initiated by reviewing the Design Chain to determine the service-related contractors and internal PG&E engineering groups involved in the electrical design of the Auxiliary Feedwater System. This review identified only the PG&E engineering group as being involved in the electrical design of this system. The following DCNPP-1 licensing documents pertaining to the AFW electrical systems were reviewed and the applicable electrical licensing commitments were identified:


- FSAR, Chapters 8 and 10
- ANSI C50.41-1977
- NEMA MG-1-1978
- PG&E to NRC Correspondence

The detailed review in this section was then conducted to determine if all the Auxiliary Feedwater System electrical licensing commitments (acceptance criteria) were met.

3.1 Terminal Voltage on Power Circuits

An independent calculation was performed to determine the voltage required at 480 V buses 1F, 1G, and 1H and 4160 V buses F and H to support required voltages at motor terminals for all design conditions. The as-built electrical equipment and cables in the AFW system were identified by reviewing one-line diagrams, flow diagrams, conduit drawings, cable and raceway schedules, and by field inspection.

Documented vendor data, circuit layouts, and impedance tables were used to calculate the voltage drop in feeder cable for full load and starting conditions. The required voltages at the buses were determined by adding the calculated cable voltage drop to the required motor terminal voltage for full load and starting conditions.



Manufacturer's data was requested from PG&E and reviewed to determine whether motors have the capability to start and accelerate the load to rated speed with 80 percent voltage applied at the motor terminals, without damage to the motor or driven equipment. The 80 percent criterion is in accordance with PG&E letter to the NRC dated October 3, 1977.

3.2 Sizing of Cable and Raceway for Power Circuits

The ampacities of the cables as installed were determined by multiplying cable rated ampacities taken from the National Electrical Code (NFPA-70-1968) by raceway derating factors (also from NFPA-70-1968). Raceway fill was assumed to be 100 percent.


3.3 Relay and Protective Device Settings for Power Circuits

A list of all the FCV, LCV, and AFW pump feeds from 480 V and 4160 V systems was prepared and the protective devices for these loads were identified. From PG&E provided test data and by field verification, the overload protective devices and their settings for all these loads were reviewed.

3.4 Electrical Equipment Separation and Redundancy

A preliminary list of safety-related devices in the system was provided by PG&E. This list was revised after a review of flow diagrams, instrumentation schematics, and electrical schematics. The power sources for these devices were determined from one line drawings, electrical schematics, cable studies, wiring diagrams, and circuit schedules. The power sources for these devices were then reviewed for electrical redundancy.

Vital circuits for the identified safety-related electrical equipment were determined by reviewing circuit schedules, cable studies, electrical schematics, and one line drawings. Raceway routings for those circuits were determined from the circuit schedules. Since adequate separation is assumed if circuits are installed in conduit, a field inspection was performed to verify only the tray portions of the raceway routings.



AC electrical power enclosures containing more than one vital electrical train were identified by reviewing electrical schematics, one line drawings, and circuit schedules. A field inspection of these enclosures was performed to verify the as-built condition.

3.5 Environmental Qualification of Electrical Equipment

A listing of safety-related electrical equipment requiring qualification was requested from PG&E. This listing was then reviewed to determine which equipment was included as part of the AFW system. The following two types of equipment were identified as being part of the AFW system: the Okonite power cable and the Raychem control cable. For these two types of equipment the qualification documentation was requested from PG&E and then reviewed to determine if the documentation existed to support this qualification. This documentation in general consisted of manufacturer's test data and analyses.


In conjunction with the documentation package review above, a review was conducted with the pipe crack field investigation (described in the ITR for Verification of the Mechanical/Nuclear Design of the AFW System). This review consisted of determining if any electrical equipment could be identified which could be subjected to high temperatures due to a pipe crack and which was not included as part of the documentation package review noted above. No such equipment was identified.

4.0 SUMMARY OF REVIEW RESULTS

4.1 Terminal Voltage on Power Circuits

Results of calculations to determine 480V bus voltages (included in the ITR for the Verification of the 4160 V Safety-Related Electrical Distribution System) indicate that bus voltages under some operating modes will be less than required to supply adequate voltage at the equipment terminals.

The review of documentation for Class IE motors identified motors that required additional information to verify motor capability to start and accelerate to rated speed at 80 percent rated voltage.



Results of the calculation of cable voltage drops are that voltage drops are in accordance with design criteria.

4.2 Sizing of Cable and Raceway for Power Circuits

Results of calculations are that rated full load currents of equipment are not greater than 80 percent (NFPA-70-1968) of the derated ampacity values of the cables as installed in raceways.

4.3 Relay and Protective Device Settings for Power Circuits

Overload protection for the FCV and LCV loads provided by thermal overload heaters is in accordance with the manufacturer's recommendations at 115 to 125 percent of full load requirements. Overcurrent relay settings for the AFW pump motors are lower than calculated motor load current assuming normal minimum system voltage.

4.4 Electrical Equipment Separation and Redundancy


Redundant electrical safety-related devices receive power from redundant power sources. Color coded circuits are routed in conduit outside of the separate dedicated switchgear and cable spreading rooms. Color coded circuits are installed in tray only in separate dedicated rooms. However, discrepancies were identified in the use of color coding to distinguish vital circuits. A review of the cable separation within ac electrical power enclosures indicates that the cable separation criteria identified in DCNPP-1 licensing documents are not met.

4.5 Environmental Qualification of Electrical Equipment

For the equipment identified in the documentation package review, qualification documentation was available.

4.6 EOI Reports Issued

Four files were opened as a result of the design review of the electrical portion of the AFW system. The status of these files is presented in Appendix B.



EOI 8042 was issued because backup source cable (gray) is bundled with normal source cable (orange or purple) within panels PY11 and PY13. This file is presently an Open Item, pending issuance of a Program Resolution Report. Note: this EOI applies to the CRVP system also.

EOI 8043 was issued because redundant safety-related trains are brought together in AFW terminal boxes BTA 308, BTH 110, and BTH 115 without the required separation. This file is presently an Open Item, pending issuance of a Program Resolution Report.

EOI 8061 was issued because documentation for certain motors does not verify motor capability to start and accelerate to rated speed with 80 percent rated voltage applied at motor terminals. This file is presently an Error Class B.

EOI 8063 was issued because overcurrent relay settings for the AFW pump motors are lower than the calculated motor load current assuming normal minimum system voltage. This file is presently an Open Item pending issuance of a Program Resolution Report.

5.0 EVALUATION OF REVIEW RESULTS

5.1 Terminal Voltage on Power Circuits

The calculated values of voltage drop for power cables of the AFW system are adequate for the connected equipment.


The documentation for 4 kV and 460 V Class IE motors was reviewed. For certain motors the documentation is inadequate to verify motor capability to start and accelerate to rated speed with 80 percent rated voltage.

5.2 Sizing of Cable and Raceway for Power Circuits

Cable and raceway are sized in accordance with NFPA-70-1968.

5.3 Relay and Protective Device Settings for Power Circuits

Overload protection for the FCV and LCV loads is adequate. Overload protection for the AFW pumps is not adequate for operation at normal minimum voltage rating of the motors.



5.4 Electrical Equipment Separation and Redundancy

The electrical power redundancy for the safety-related devices meets the redundancy requirements. Cable separation of vital circuits in raceway does not meet separation requirements because color-coding discrepancies of vital circuits were identified (refer to ITR for the Verification of the Instrument and Control Design of the Auxiliary Feedwater System.) Raceway separation external to electrical enclosures meets separation requirements. Cable separation within ac power enclosures does not meet licensing criteria.

5.5 Environmental Qualification of Electrical Equipment

The review verified that equipment identified in the documentation package review has adequate documentation to qualify it and meets the licensing commitment.

6.0 CONCLUSIONS

This section provides the conclusions to the review of the electrical design for the AFW system. This Interim Technical Report will be revised upon resolution of all identified Open Item Reports and completion of all additional verification described in this section.


6.1 Terminal Voltage on Power Circuits

Power cable design is satisfactory. No additional verification is required for power cable design.

Documentation of Class IE motor capability to start and accelerate to rated speed at 80 percent rated voltage is unsatisfactory. Because this is a generic concern, additional verification will be required. (This concern was also identified in the CRVP System).

6.2 Sizing of Cable and Raceway for Power Circuits

Sizing is satisfactory. No additional verification is required.



6.3 Relay and Protective Device Settings for Power Circuits

Overload protection for the AFW pumps is unsatisfactory. Additional verification may be required.


6.4 Electrical Equipment Separation and Redundancy

Separation and redundancy are not satisfactory. Because there is evidence of a generic effect in the design of cable separation within an ac power enclosure, additional verification may be required. (This concern was also identified in the CRVP system.)

Upon resolution of EOI Nos. 8054 and 8059 (described in ITR for Verification of the Instrument and Control Design of the Auxiliary Feedwater System) additional verification of cable separation may be required.


6.5 Environmental Qualification of Electrical Equipment

For equipment identified in the documentation package review, evidence of qualification is satisfactory and no additional verification is required. However, if the resolution of EOI Nos. 8002, 8003, and 8004 (described in the ITR for Verification of the Pressure, Temperature, Humidity and Submergence Environments) is a reanalysis of environments, this could result in an increase in the temperatures to which safety-related equipment had previously been qualified. In this event, additional verification may be required.



APPENDIX A


REFERENCES



APPENDIX A


REFERENCES

1. Final Safety Analysis Report, Chapters 8 and 10
2. ANSI C50.41-1977, American National Standard Institute - Polyphase Induction Motors for Power Generating Stations, Part III, Section 14
3. NEMA MG1-1978, Large Apparatus Induction Motors, Part 20
4. AIEE Publication S-135-1, Power Cable Ampacities
5. Voltage Profile and Cable Ampacity Study - Calculation 14296-E-1-7
6. Letter: PG&E to NRC, October 3, 1977, Answer 1-C, 80 Percent Motor Starting Capability
7. National Electric Code NFPA-70-1968, Cable Rated Ampacities and Raceway Derating Factors
8. DCVP 44 - Relay Test Data and Protection Settings, One-Line Drawings
9. DCVP 46 - Flow Diagrams, Electrical Schematics
10. DCVP 77 - List of Safety-Related Devices, Conduit Drawings
11. DCVP 107 - Instrument Locations
12. DCVP 180 - Circuit Schedules, Raceway Schedules
13. DCVP 187 - Cable Block Diagrams
14. DCVP 193 - Cable Block Diagrams
15. Environmental Qualification Report, Rev. 1, Appendix A, Files EH-2 and EH-3, September 2, 1982




APPENDIX B

EOI FILES




DCNPP IDVP STATUS REPORT

FILE NO.	REV.		LATEST REV.			SUBJECT
	DATE	REV.	DATE	BY	STATUS	
8042	821022	0	821022	SWEC	OIR	AFW, CRVP INSTRUMENT PANELS PY11, PY13
8042	821022	1	821028	SWEC	PER/AB	AFW, CRVP INSTRUMENT PANELS PY11, PY13
8042	821022	2	821123	TES	OIR	AFW, CRVP INSTRUMENT PANELS PY11, PY13
8042	821022	3	821207	SWEC	PPRR/OIP	AFW, CRVP INSTRUMENT PANELS PY11, PY13
8042	821022	4	821213	TES	PRR/OIP	AFW, CRVP INSTRUMENT PANELS PY11, PY13
8043	821022	0	821022	SWEC	OIR	AFW TERMINAL BOXES BTA 308, BTH 110, BTH 115
8043	821022	1	821028	SWEC	PER/AB	AFW TERMINAL BOXES BTA 308, BTH 110, BTH 115
8043	821022	2	821123	TES	OIR	AFW TERMINAL BOXES BTA 308, BTH 110, BTH 115
8043	821022	3	821207	SWEC	PPRR/OIP	AFW TERMINAL BOXES BTA 308, BTH 110, BTH 115
8043	821022	4	821213	TES	PRR/OIP	AFW TERMINAL BOXES BTA 308, BTH 110, BTH 115
8061	821109	0	821109	SWEC	OIR	MOTOR RATINGS-AFW AND CRVP
8061	821109	1	821123	SWEC	OIR	MOTOR RATINGS-AFW AND CRVP
8061	821109	2	821123	SWEC	PER/B	MOTOR RATINGS-AFW AND CRVP
8061	821109	3	821206	TES	ER/B	MOTOR RATINGS-AFW AND CRVP
8063	821122	0	821122	SWEC	OIR	AFW PUMPS 12 AND 13
8063	821122	1	821122	SWEC	PER/A	AUXILIARY FEEDWATER PUMPS NUMBERS 12 AND 13.
8063	821122	2	821206	TES	OIR	AUXILIARY FEEDWATER PUMPS NUMBERS 12 AND 13.
8063	821122	3	821202	SWEC	PPRR/OIP	AUXILIARY FEEDWATER PUMPS NUMBERS 12 AND 13.



APPENDIX C

PROGRAM MANAGER'S ASSESSMENT



APPENDIX C

PROGRAM MANAGER'S ASSESSMENT

Independent review by TES of the tasks performed by SWEC to verify the design of the AFW Electrical System was done in accordance with IDVP Phase II Program Management Plan dated June 18, 1982 and the Engineering Procedure EP-1-014.

The review involved a visit to the site and several visits to the SWEC offices for detailed discussions and review, with SWEC personnel, of the work performed by SWEC including the methodology used in the evaluation of this task.

The files used by SWEC were reviewed thoroughly and specific recommendations were made to the IDVP Manager delineating appropriate resolution.

As a result of the verification of initial sampling selected by SWEC and the assessment of the impact of SWEC findings, TES, as Program Manager is of the opinion that additional verification is needed.

