

PRELIMINARY REPORT ON THE
RHODE ISLAND NUCLEAR SCIENCE CENTER
CONVERSION FROM HEU TO LEU FUEL

FEBRUARY 16, 1994

9403020126 940218
PDR ADCK 05000193
P PDR

Preliminary Report on the Rhode Island Nuclear Science Center Conversion from HEU to LEU Fuel

T. Tehan

Director, Rhode Island Nuclear Science Center
Narragansett, Rhode Island

February 16, 1994

ABSTRACT

The 2 MW Rhode Island Nuclear Science Center (RINSC) open pool reactor was converted from 93% UAL-High Enriched Uranium (HEU) fuel to 20% enrichment U_3Si_2 -Al Low Enriched Uranium (LEU) fuel and achieved initial criticality on August 17, 1993. The conversion included redesign of the core to a more compact size and the addition of beryllium reflectors and a beryllium flux trap. A significant increase in thermal flux level was achieved due to greater neutron leakage in the new compact core configuration.

This paper will provide a preliminary report on the overall program, including discussion of the project history, results obtained and experience gained from the conversion and test program. A final report will be issued after remaining technical issues have been resolved.

INTRODUCTION

Conversion of the RINSC research reactor began in August, 1986 with the award of a Department of Energy (DOE) grant to convert the fuel system from 93% enrichment UAL fuel to a nominal 20% enrichment U_3Si_2 -Al fuel. As part of the conversion, priority was given to designing the core for greater flux at existing power levels. Also, consideration was given to ensuring that the new core would be capable of operating at higher power levels. The facility "in concrete" structures and control systems were designed for operation at 5 MW but necessary support systems were not installed due to funding constraints. As part of the core design process, critical operating parameters for operation at 5 MW were determined.

The conversion program consisted of five phases: design of the new core, completion of a Safety Analysis Report (SAR), shipment of spent HEU fuel, modifications to reactor systems and new core load, and the test program. The shutdown time for conversion to the new fuel system was utilized to install a new 3MW cooling tower, digital wide range power level instruments and a larger secondary piping system which were provided through DOE Reactor Instrumentation Program grants.

BACKGROUND

The operating license for the RINSC reactor was issued on July 21, 1964 with an expiration date of August 27, 2002. The original license permitted operation at a power level of 1 MW. An amendment to the license was issued on September 10, 1968 which permitted operation at 2 MW. The conversion order to switch from high to low enriched uranium fuel was issued on March 17, 1993 following approval of the revised Safety Analysis Report.

The reactor is multipurpose with capabilities usually associated with open pool facilities. Because of staffing and funding limitations, utilization has concentrated in two areas - neutron scattering and neutron activation analysis. Recently, the reactor started supporting commercial work in the areas of neutron transmutation doping of silicon and environmental monitoring.

The reactor system consists of a 7x9 grid box with the four corner grid positions occupied by suspension frame corner posts. These corner posts connect the grid box to the reactor bridge which spans the open pool. The hollow posts each contain a neutron detector required for operation of the reactor. The grid plate is suspended about 8 meters (26.33 feet) below the pool water surface. The grid box also contains two permanently installed shrouds in which four boron control safety blades (rods) move. A stainless steel regulating rod is located in the reflector area and is used for fine control of flux level.

The LEU conversion core consists of a compact configuration using 22 standard plates per fuel element and a combination of graphite and beryllium reflectors. The fuel is a uranium-silicide-aluminum dispersion and each element contains 275 grams of U-235. There are fourteen fuel elements which surround a central beryllium flux trap. Graphite and beryllium reflectors surround the core. The beryllium reflectors start on the outer periphery of the grid box and are moved inward in groups as the reactivity decreases due to fuel burn up. The initial startup configuration is shown in Figure 1.

DESIGN PHASE

The design phase focused on six basic criteria and objectives of the conversion program. They were:

1. Convert the reactor to LEU using the standard design DOE fuel plate.
2. Design a core with a greater fuel burnout than the present 14%.
3. Design a core which would optimize the thermal flux in the beam tubes and allow for further improvement.
4. Design a core with a flux trap for small sample irradiation.
5. Design a core capable of 5 MW operation with higher primary flow.
6. Design a core with the same cost as a replacement HEU core.

The neutronic core design was performed using the standard LEU fuel plate provided by DOE. This plate is thinner and contains considerably more uranium-235 than the HEU plate (275 grams/plate for LEU and 124 grams/plate for HEU). Because of the heavy fuel loading of the LEU plate, a major concern was that the core might become so small that the control blades might lose their effectiveness. Many core configurations were considered.¹ These studies included consideration of:

INITIAL CORE LOADING

Percent Power - 14 elements Core #1

Core Lifetime: ~ 14 Wks (~ 560 Full Power Hours)

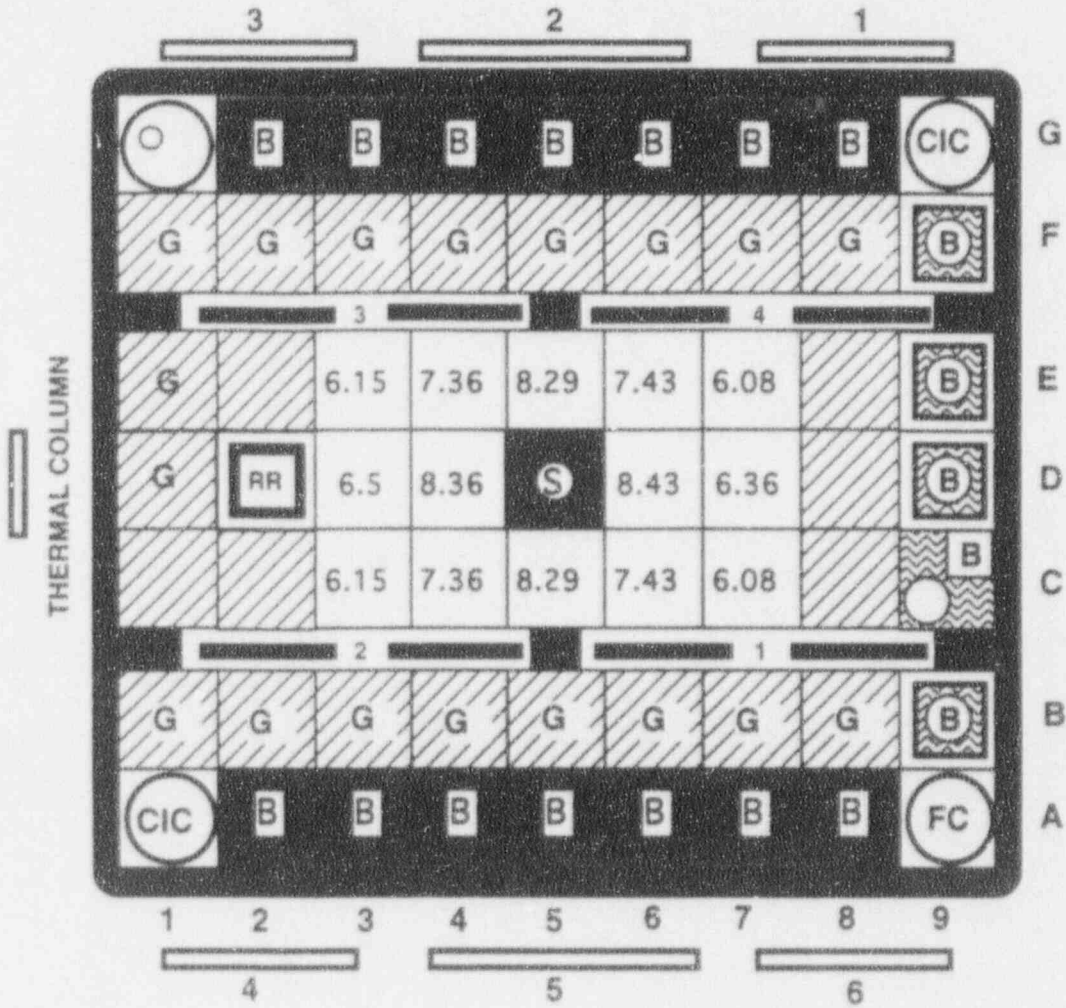


FIGURE 1

1. 18 fuel plate elements
2. 22 fuel plate elements
3. several fuel element arrangements
4. graphite and beryllium reflectors
5. relocation of the regulating rod position
6. use of a stainless steel regulating rod.

The neutronic calculations were performed by Argonne National Laboratory using the EPRI Cell, DIF 3D, and VIM Monte Carlo Codes. The thermal-hydraulic calculations were done by RINSC using PLTEMP and NACON codes. These results and other information were used to develop a final design that optimized the project objectives.

The conversion core uses fuel elements that each contain 22 standard plates. The Uranium silicide-aluminum dispersion fuel has significant performance improvements over the previous alloy fuel including an increase of 50% in allowable burn up. The fuel elements surround a central flux trap which is made of beryllium and has a 38 mm hole in the center. A combination of beryllium and graphite reflectors was chosen. This allowed a cost savings by using the existing graphite reflectors while achieving improved performance from a beryllium reflector design. The mix of the two materials provides a means of compensating for fuel burnup by moving the beryllium closer to the fuel to achieve increased reactivity in the core. The smaller core geometry results in more neutron leakage which is enhanced by interactions with the beryllium which produces more neutrons and results in a greater flux at the beam ports and in the core.

The geometry of the new core resulted in the existing regulating rod being too far from the flux for adequate control. Moving the rod in closer to the fuel resulted in the rod having too much reactivity worth. This problem was resolved by moving the location in one grid block to increase the reactivity of the rod and changing the material from boral to stainless steel to decrease the reactivity worth of the rod. The net effect on control rod reactivity was calculated to be negligible from the previous measured value.

SAFETY ANALYSIS REPORT

The neutronic and thermal-hydraulic calculations for the new core compared favorably with the performance of the HEU core. The design basis accident for the reactor was determined to be a loss of coolant accident with the water draining through a beam port and the associated drain. Since the LEU core has a higher power density, there was a possibility of exceeding thermal limits if the fuel was not adequately cooled. The core sits in a grid box which has a drain hole in the bottom that is 1.25 cm in diameter. By restricting the allowed opening in beam ports that are in use to an effective 1.25 cm diameter hole, it was found that the LEU core will not suffer melting following a loss of coolant accident.

The original analysis of the effects of a fission product release from a fuel element failure was completely revised to make use of the considerable increase in knowledge in this area since the initial Safety Analysis was completed. A worst case scenario was developed where a fuel plate was damaged and all available fission product gases were released. Considerable conservatism was used in calculating power history and the volume of activity released to the building and surrounding area. The calculated exposures were well within regulatory limits.

As part of the Safety Analysis, the Technical Specifications for the facility were required to be modified to reflect the LEU conversion. The existing Technical Specifications were essentially unchanged from the original 1964 version and were not in compliance with current standards. ANSI N378, Standard for the Development of Technical Specifications for Research Reactors, and other references supplied by the NRC were utilized to completely rewrite the Facility Technical Specifications. This exercise was very beneficial for the staff because it focused attention on the operational and casualty concerns associated with the new core and the necessary technical review provided an excellent vehicle for improving staff technical and operational knowledge just prior to the actual conversion work.

SPENT FUEL SHIPMENT

Prior to receipt of the new core, it was necessary to remove a large inventory of spent fuel so that space would be available for storage of the old HEU core when it was removed. The limiting item in this process was availability of the BMI shipping cask. This container is the only one available for shipping university MTR fuel and is usually in high demand. To maximize the number of elements in each shipment, the end pieces were cut off of each fuel element so that just the fuel region of the assembly was loaded in the cask. This process doubled the number of spaces available in the cask from 12 to 24. A total of 34 elements with 18,767 curies of activity were transported to Savannah River in two shipments during January, 1993. When the HEU core was unloaded to storage racks in the pool, 12 of the 30 fuel elements were within 2 grams of their burn up limit. There are currently 39 HEU fuel elements in storage for future shipment.

CORE MODIFICATIONS

The HEU core was unloaded in the second week of July, 1993 and work began on moving the regulating rod. High radiation levels at the top of the grid box resulted in the decision to keep the water level at the top of the grid box. In this condition, readings of 1 to 2 Rem/hr were still found at the top of the grid box. The old regulating rod was removed by cutting the control shaft near the top of the support frame and transporting the assembly with a lanyard to the spent pool fuel. The sleeve for the regulating rod was removed by attaching a lanyard to a vice grip pliers and attaching the pliers to the lip of the sleeve. The sleeve was then transported to the spent fuel pool. Both these items were highly radioactive and the procedure was carried out rapidly to minimize exposure.

The new regulating rod sleeve was installed to the grid box by a brace at the top of the assembly which spanned the top of one graphite reflector. The regulating rod was installed with a new control shaft which had a 3 inch bend to accommodate the shift inward one grid position. A bearing was installed on the support frame to ensure proper alignment of the regulating rod. The rod was operationally tested before the core load. The total exposure received during this work was 40 mrem.

The new fuel arrived from Babcock and Wilcox on August 3, 1993. After receipt inspection, it was stored in fuel storage racks in the pool. The beryllium reflectors arrived on August 16, 1993 and were also inspected and placed in storage racks in the pool. Four extra LEU fuel elements were inspected and stored in the fuel safe.

CORE LOAD

Due to the small size of the core, it was decided to do 1/M reactivity calculations after each element was loaded. To ensure that there was no problem with detecting an increase in counts during the criticality experiment, the test source was placed in a basket in the middle of the core where the flux trap would normally be located. This geometry allowed the four detectors that are located in the corner posts to monitor the flux. Fuel elements were tested for fit and then loaded in a symmetric pattern around the flux trap. The count rates with blades in and blades out increased steadily with each fuel element addition and it appeared that criticality would be achieved with 12 elements. When the twelfth element was loaded, the reactor increased counts but would not go critical. After a review of the data and calculations, it was determined that there was too much reactivity loss in the center of the core from the flux trap being replaced by the test source. The blades were inserted. The test source was moved to its normal location and the flux trap was inserted into the center of the core. Criticality was achieved after blades one, two and three had been fully withdrawn and blade 4 was at seventeen inches.

PHYSICS TESTING

Upon completion of the initial fourteen element core load, a test program was conducted to determine the physics parameters of the new core. The initial set of blade worth curves indicated that the blades had much less worth than estimated and the values were not consistent between the blades. Foils and wires were used to map the flux in the core and all data was sent to Argonne Laboratory for analysis. Laboratory results indicated that the data was consistent with predicted values.

RINSC's procedure for determining blade worth was reviewed and it was found that criticality was achieved by pulling rods to the top and then the next rod was used for rod worth calculations as it was pulled out. This procedure worked well for the old core which was large and surrounded all the blades. The compactness of the new core resulted in the blades being located outside of the fuel with their inner sides facing the fuel elements. As a result, the existing procedure caused a significant flux tilt with three rods out and one in. After reviewing rod calibration procedures from other research reactors, the procedure was revised to bank all rods but the one being tested at the same level and then pull the rod under test through the flux. This procedure resulted in the rod worth values becoming uniform within 10% but their total worth was still too low.

Initial physics testing was being done at very low power levels in order to minimize personnel exposure while conducting a complete flux map of the core. Each critical testing period resulted in a significant increase in the source counts in the core as the beryllium was irradiated. Blade worth calculations were based on the Inhour formula which uses the observed period to compute reactivity.² This calculation does not take source neutrons into consideration. When it became apparent that the low blade worths were due to interference from the source neutrons, flux mapping was completed and then the rod calibrations were conducted at a power level two decades above the power level at which criticality was achieved. The resulting rod calibration data was much closer to predicted values but still slightly low.

The low burn up of the LEU fuel resulted in the control rod position being low in the core. The resulting axial flux pattern as shown in Figures 2 and 3 was correspondingly high at the bottom and much lower at the top of the core. Since the neutron monitoring detectors are located in the corner posts above the core, it appeared that significant shielding of the flux might result from the geometry of the detectors. When two detectors were lowered next to the grid box in the pool, the flux increased by a factor of twenty for a given power level. It was clear that the compact core was more sensitive to detector position than the previous HEU core which routinely ran with the blades near the top of the core. The resulting flux profile was much flatter and provided more flux at the detectors. A modification to the LEU grant has been submitted to relocate the two power range detectors to the vicinity of the grid box mid plane.

Flux Trap Thermal Flux at 2MW

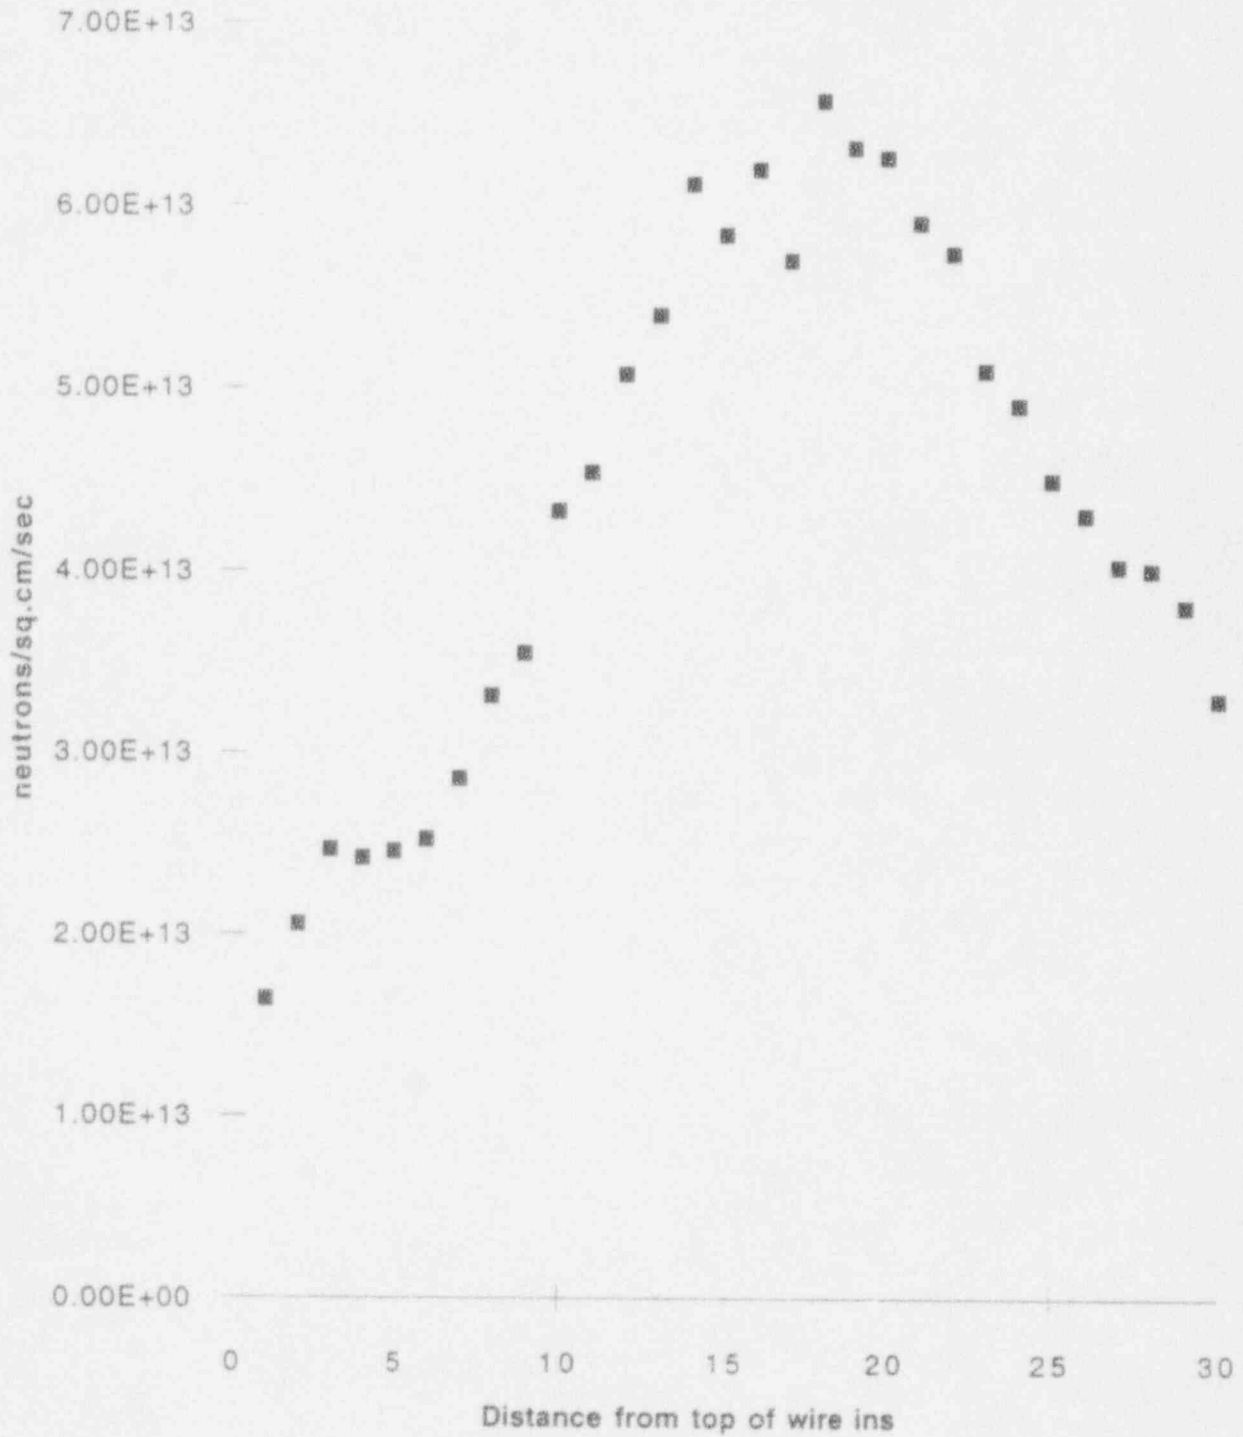


FIGURE 2

Thermal Flux (2MW) in Irrad Basket (Incore Device)

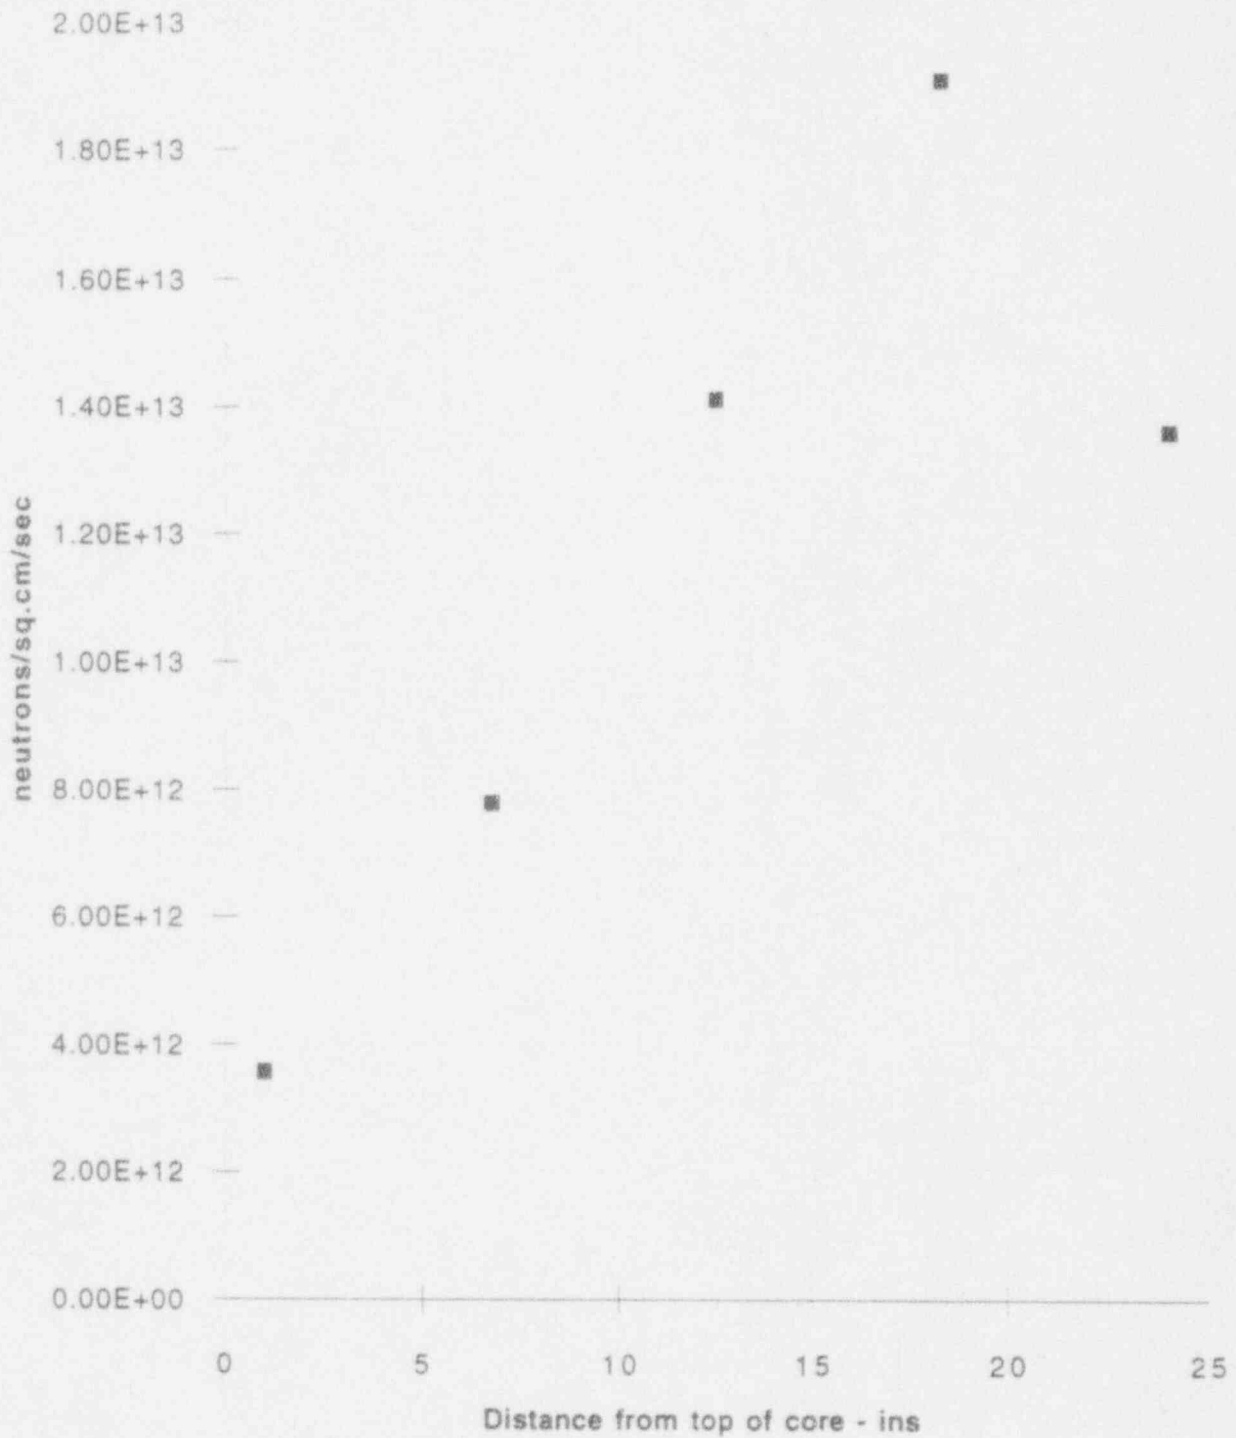


FIGURE 3

The low position of the rods in the core resulted in vibration of the rods due to the coolant flow in the shrouds. The vibrations cause reactor power oscillations up to 10% depending on rod height. This phenomenon had been observed in the initial operation of the HEU core but it diminished as the rods were withdrawn to compensate for fuel burn up. Discussions with other research reactors indicated that this problem can be solved by installation of flow reducers in the shrouds. No corrective action is currently planned since fuel burn up should resolve the problem.

A reduction in primary flow occurred after the conversion to LEU because of the compact core configuration. The HEU core had coolant flowing through 30 fuel elements. The LEU core has coolant flowing through 14 elements. The beryllium reflectors do not have flow channels which results in a higher pressure drop across the core and decreased primary flow by 90 gpm to 1640 gpm. A modification to the LEU grant has been submitted to obtain a larger primary pump.

TEST RESULTS


Initial Criticality: Minimum Core Size

The critical mass for the LEU start up core occurred with twelve fuel elements which equates to 3300 grams of Uranium-235. Figure 4 shows the LEU Critical mass. The numbers in the boxes for fuel elements describe the loading sequence. The critical mass for the initial HEU core consisted of 21 elements and 2.6 kilograms of Uranium-235. Since the LEU core is much smaller, additional fuel was required to make up for the larger neutron leakage experienced by this core.

Excess Reactivity

Excess reactivity was measured for the LEU startup core at $2.70\% \Delta K/K$ as compared to a design calculation of $3.0\Delta k/k$. The Excess reactivity for a 30 element HEU startup core was measured at $4.5\% \Delta k/k$. The design and measured values for both cores compared favorably and are within the Technical Specification limit of $4.7\% \Delta K/K$.

INITIAL CORE LOADING
 CRITICAL
 12 element CORE #1

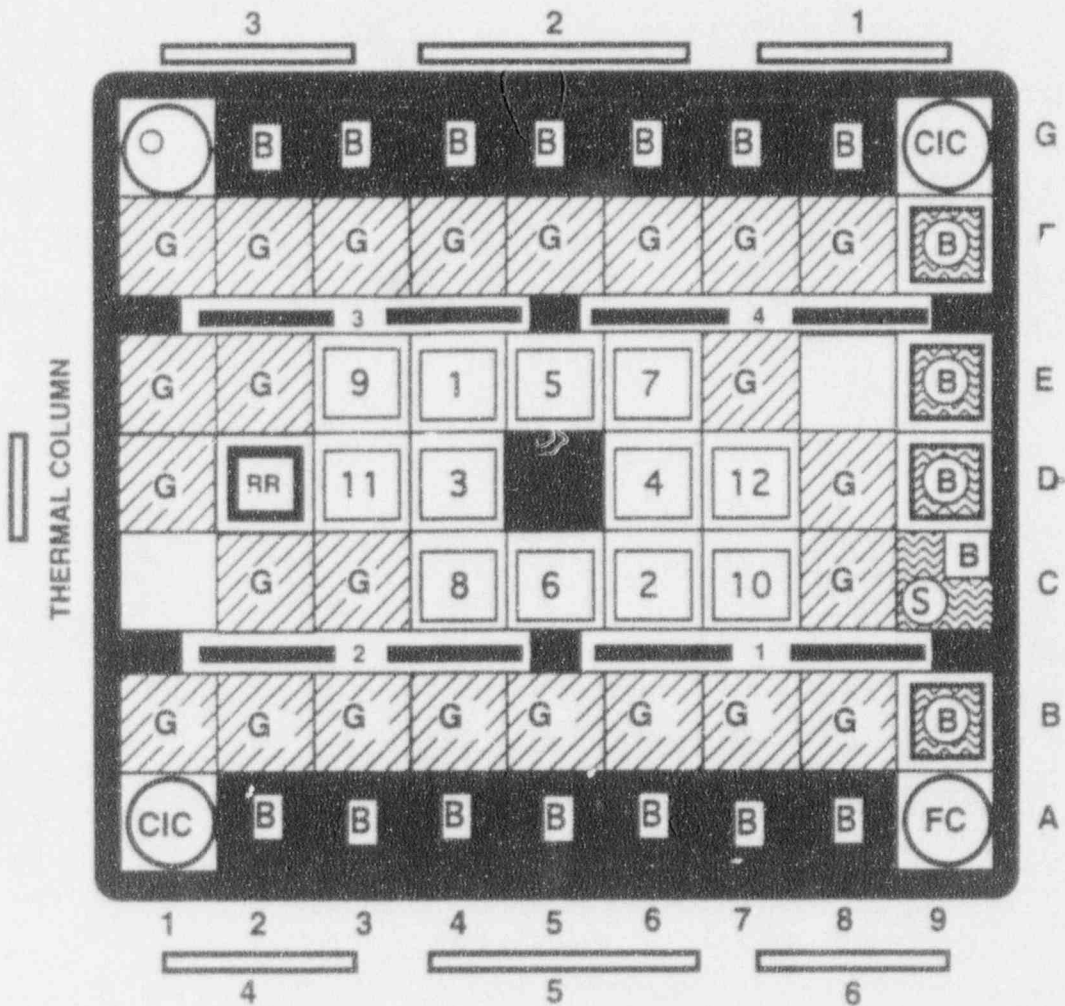


CRITICAL WITH 14 FUEL ELEMENTS

BLADES 1, 2, 3 - 26.6" full out

BLADE 4 - 17.16"

Regulating Blade 23.5" - full out



Beryllium Flux Trap with plug



Sb-Pu Neutron Source

FIGURE 4

Control and Regulating Rod Calibrations

In the HEU core, control blades 2 and 3 had a worth of $3.0\% \Delta K/K$ and blades 1 and 4 had a worth of $2.8\% \Delta K/K$. The lower value for blades 1 and 4 was due to their location which placed more of the blade surface in the reflector region. In the LEU core, the blades surround the active fuel region and are symmetric with respect to the flux. However, the blades are not in the highest flux region and have less reactivity effect when compared with the HEU core which had a much flatter flux profile. The following results were obtained for the LEU start up core:

Blade	reactivity <u>predicted</u>	($\% \Delta K/K$) <u>measured</u>
1	-2.39	-2.27
2	-2.39	-2.10
3	-2.39	-2.30
4	-2.39	-2.16

While the control blade measurements were consistent with the predictions, the regulating rod measured value was significantly less than the predicted value. The measured value was $.269\% \Delta K/K$ and the predicted value was $.41\% \Delta K/K$. The HEU core had a $.48\% \Delta K/K$. While the new stainless steel regulating rod has less effect than the previous boral rod, the control system has functioned properly in automatic with the new regulating rod which indicates that it has sufficient reactivity and no further action is planned.

Differential rod worth curves for the control blades and regulating blade are contained in Figures 5 through 9.

Reactor Power Calibration

Following initial criticality, an extensive program was conducted to map the flux in the reactor core, reflector region and facilities. Foils and wires were irradiated at low power to determine a detailed map of radial and axial flux. The flux profile was integrated to obtain a calculated reactor power of 12.5 watts which compared closely to the indicated power of 10 watts. The wide range linear channel detectors were adjusted and power was increased to 100 KW and then 500 KW while checking consistency between the

Blade 1 vs 2,3,4

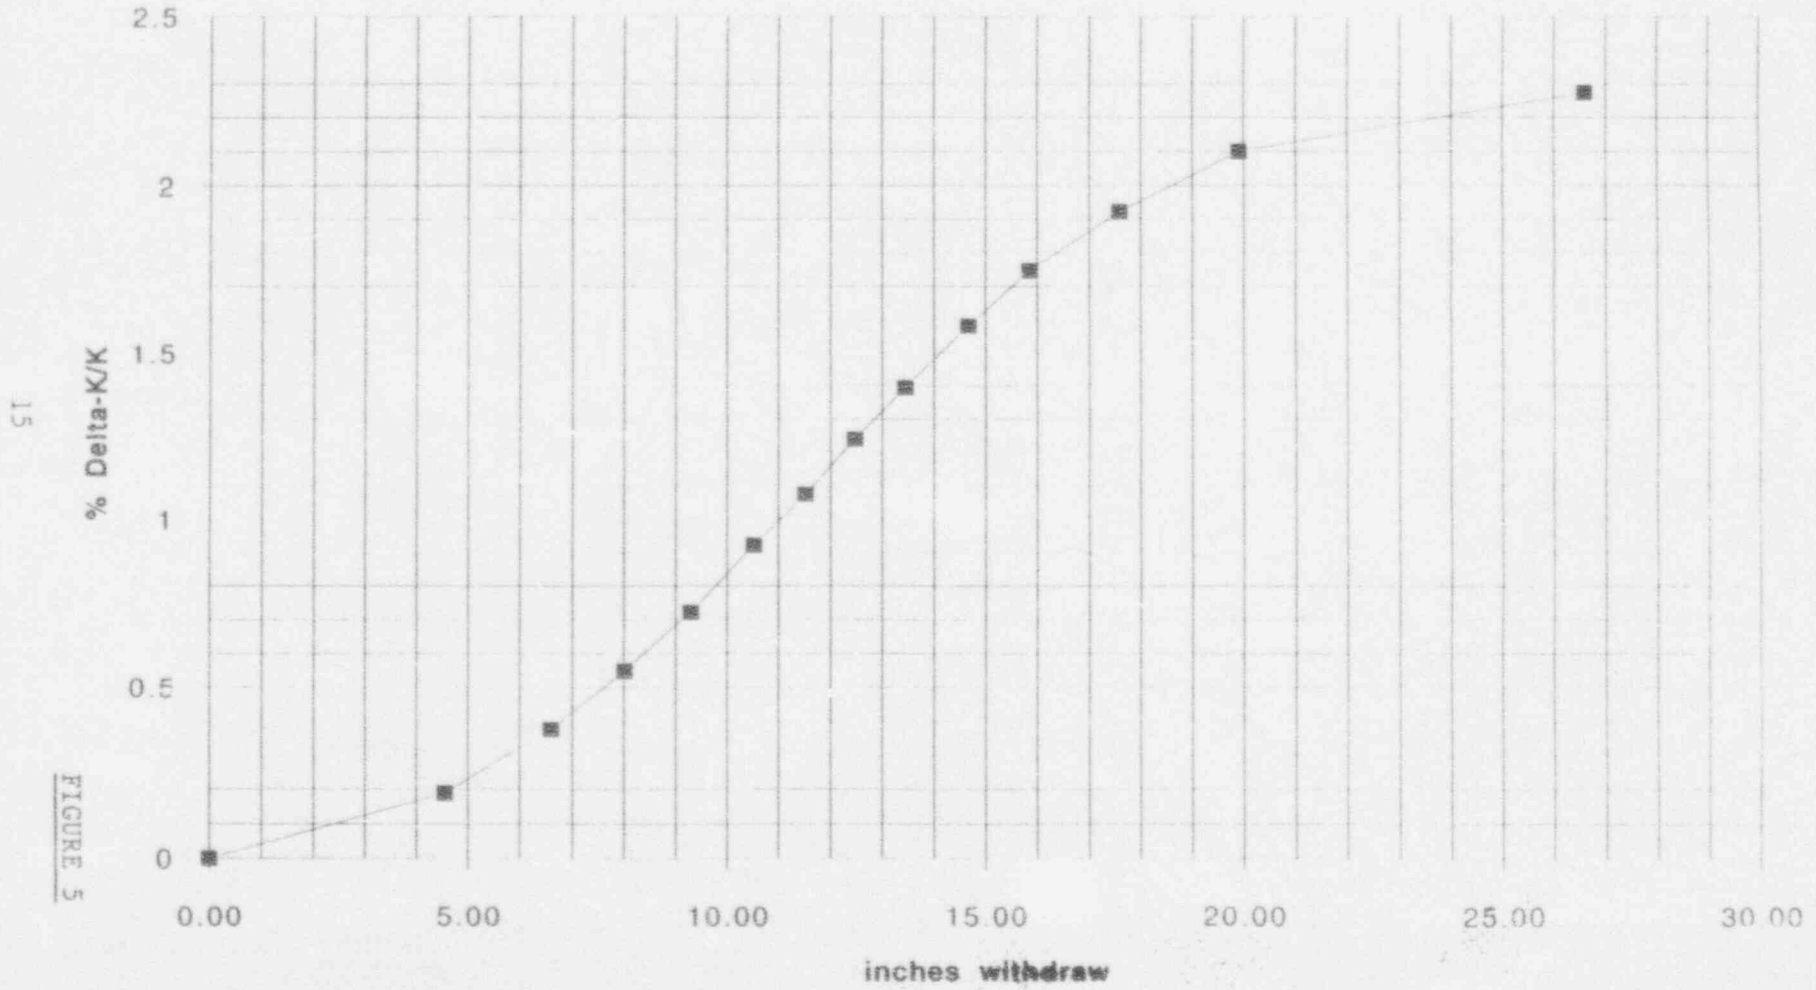


FIGURE 5

15

Blade 2 vs 1,3,4


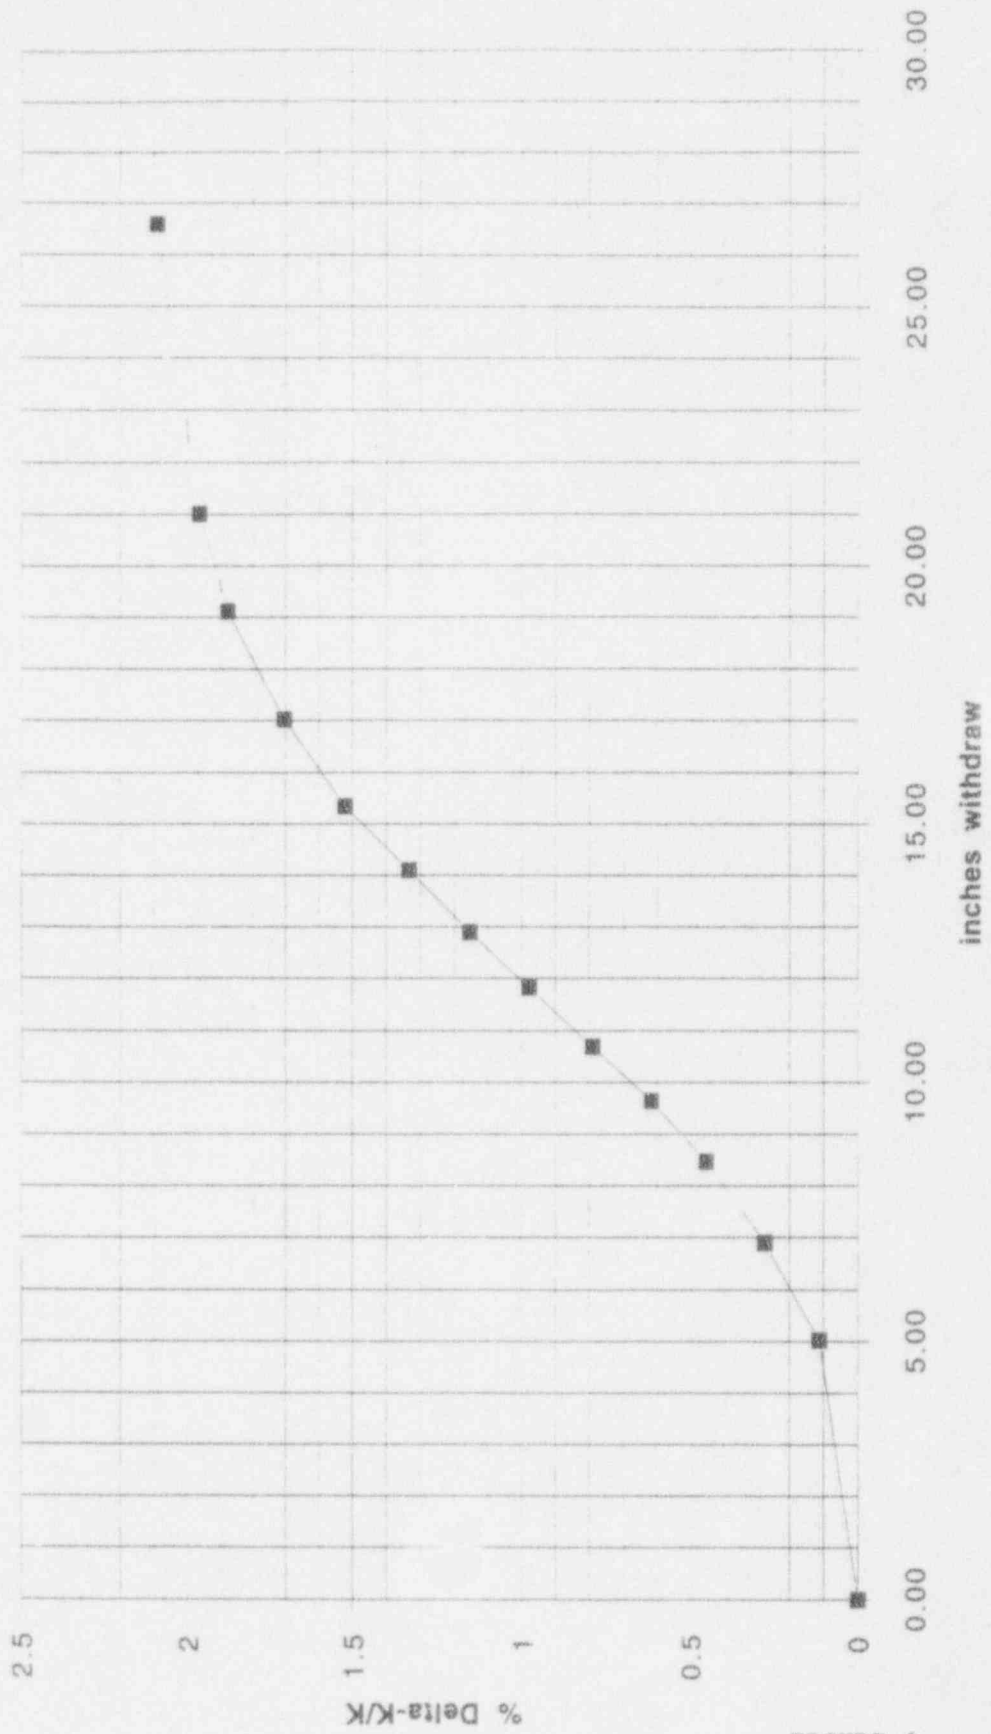


FIGURE 6

Blade 3 vs 1,2,4

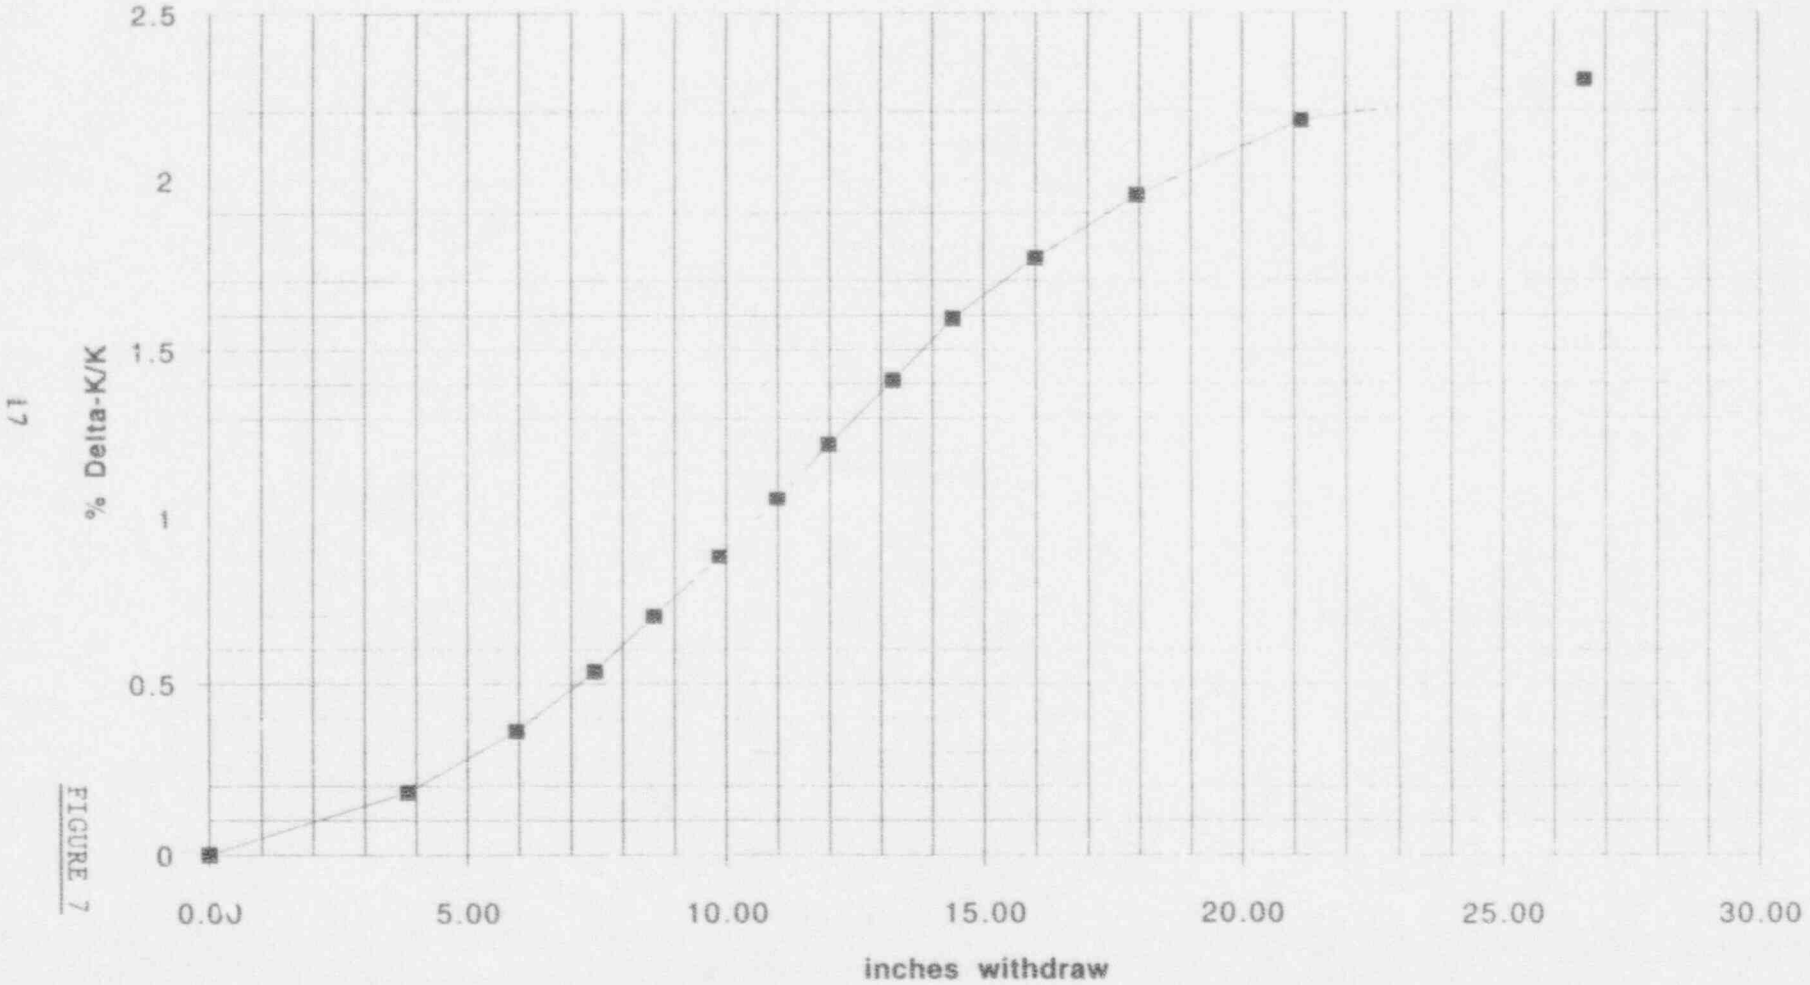

17

FIGURE 7

Blade 4 vs 1,2,3


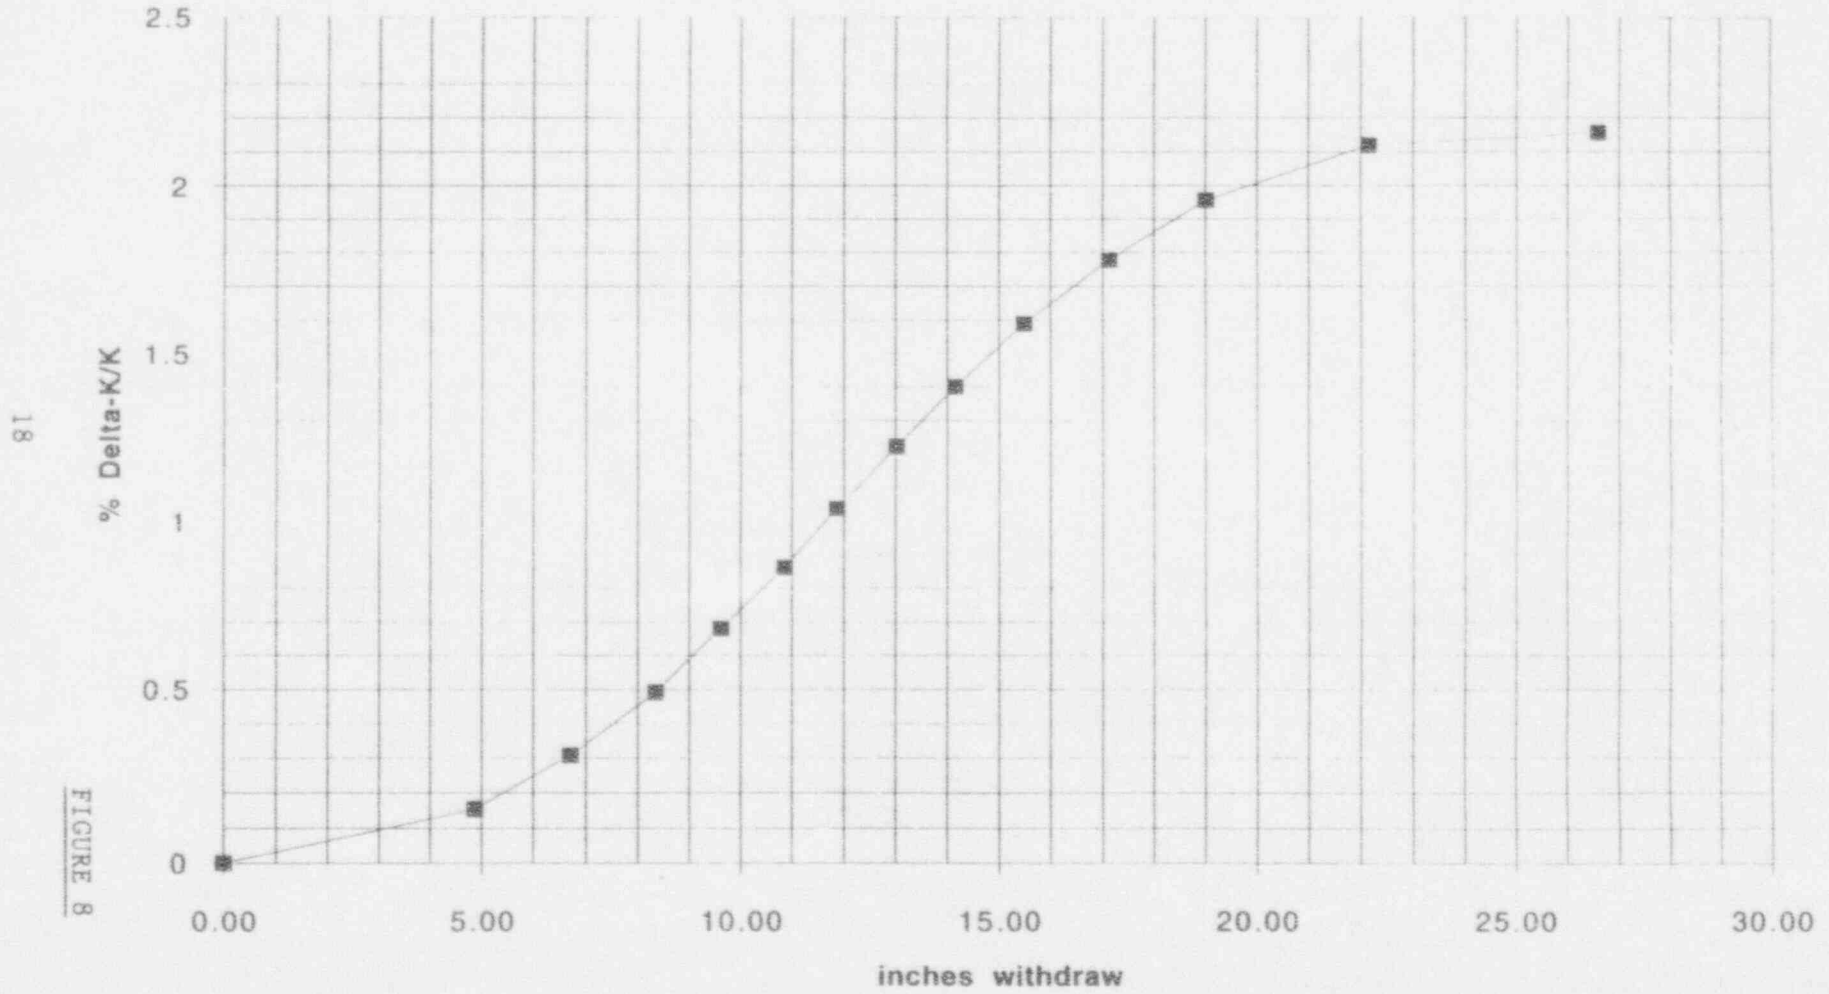


FIGURE 8

18

FIGURE 9

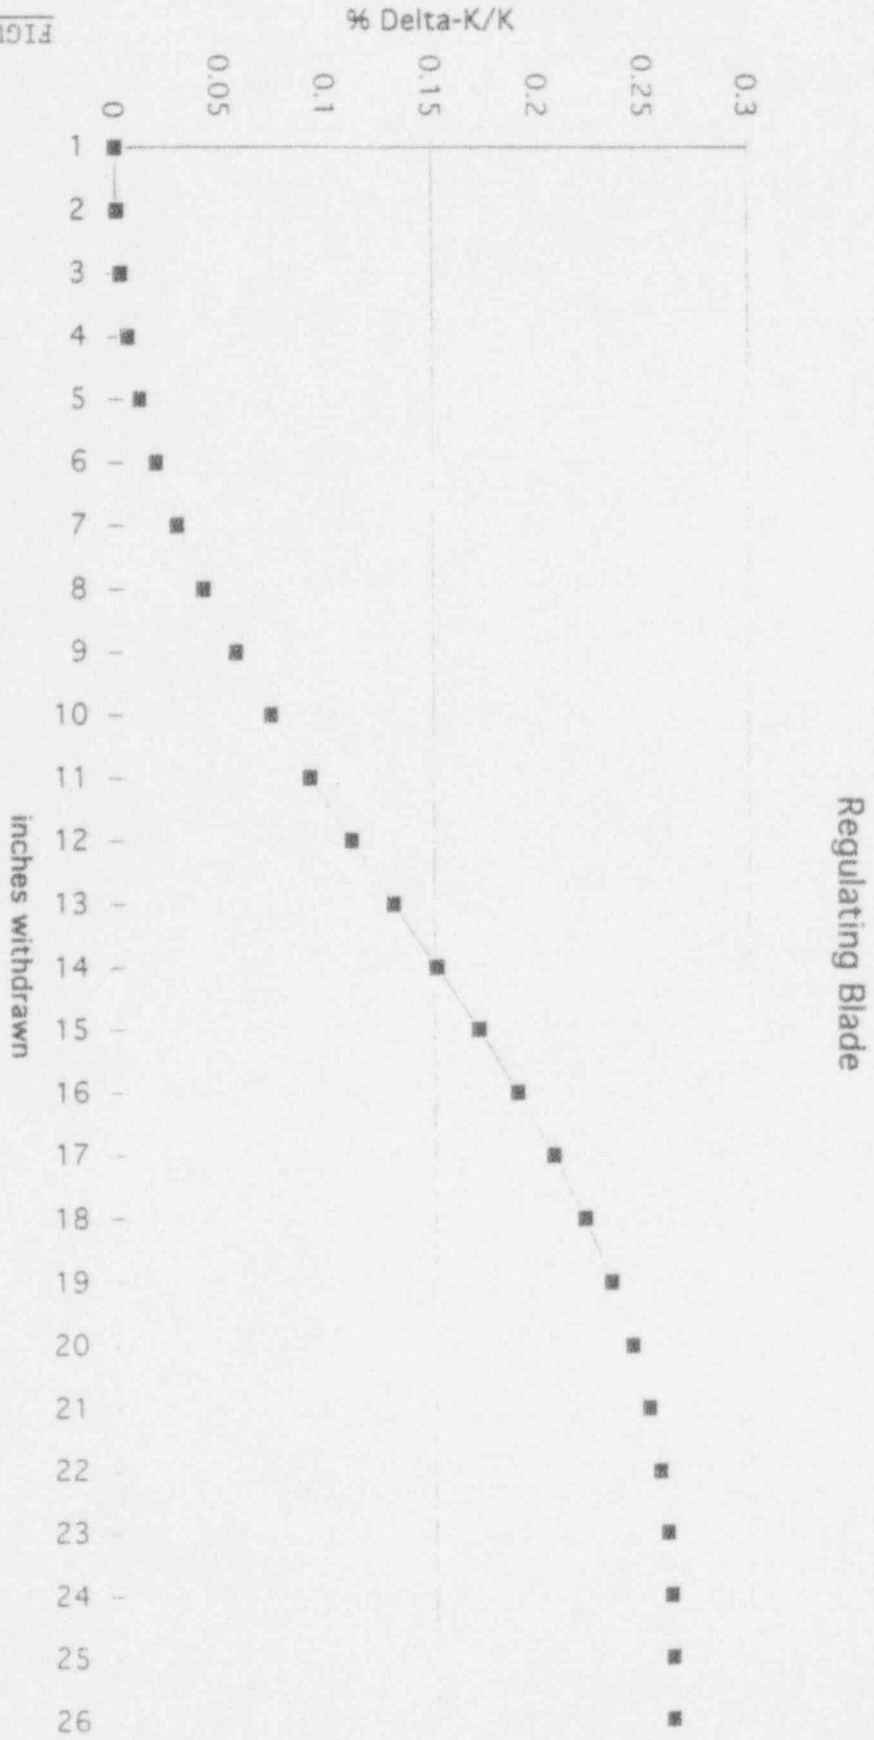

wide range linear channels and the nitrogen-16 monitor and the delta T of the primary hot and cold legs. After verifying consistency between these instruments, reactor power was increased to 1 MW to conduct a calorimetric calibration. The resulting instrument adjustments were less than 3%. Calorimetric calibrations were then conducted at 75% and 90% and 95% reactor power and measurements were within 3% of actual power and nitrogen-16 readings.

As part of the conversion, the High flux scram setting was reduced to 115% from 130%. The alarm set point remained at 110%. Due to the problem with the detectors being located above the core, the current of the compensated ion chambers that provide wide range power signals was initially only 25% of the HEU value at a given power level. The detectors were lowered in the corner posts as far as possible to place them in the maximum neutron flux. The wide range linear gain adjustment was set at maximum to match indicated power to actual power. This arrangement does not allow for changes to be made to detector output to compensate for blade movements as the result of changes in xenon concentration and temperature. As a result, reactor power must be limited below 2 MW when gain adjustments can not be made.

Shutdown Margin

The shutdown margin assumes that the regulating rod and the most reactive control blade are fully out. For both the HEU core and the LEU core, blade three was the most reactive. The shutdown margins were:

	Calculated ($\% \Delta K/K$)	Measured ($\% \Delta K/K$)
HEU		7.47
LEU	6.25	3.89

The Technical Specification limit is greater than 1.0% $\Delta K/K$. The HEU and LEU shutdown margins are well within specifications. Like all the observed LEU reactivity values, the observed shutdown margin is less than the calculated value and may be due to the installed core being less reactive than the modeled core. This parameter will be subject to further investigation when the neutron detectors are relocated.

Thermal Neutron Flux Distributions

Figure 10 shows the radial thermal flux distribution at 2 MW for the HEU and LEU cores. The LEU flux measurements were in close agreement with the calculated values and were higher than previous HEU flux levels. Thermal flux was significantly increased in the center of the core due to the flux trap and in the reflector region due to the improved neutron moderation of the beryllium. The thermal flux in the rabbit system increased by approximately 25% to 3.6×10^{12} . Figure 3 and 4 show the axial flux distribution in the center of the core at the flux trap and at the periphery of the core in an incore device. The peak flux in the bottom of the core is evident in both locations.

Flux levels at the beam ports have been investigated extensively by the members of the University of Rhode Island Physics Department which operates several neutron scattering instruments at RINSC. In a report³ on the effects of the conversion on neutron flux, this group found wide variations in the LEU flux because the control rod positions were so low in the new core that they cause shading of the beam ports. As a result, a one inch change in rod position could cause a 15% change in flux level. The thermal flux levels have increased in all cases and epithermal flux has decreased in some regions. This procedure should be redone after the control rods no longer interfere with the measurements.

Initial Fuel Loading Measurements

As previously discussed, the initial criticality experiment was conducted by performing a 1/M calculation after each fuel element addition. Figure 12 shows the loading sequence and Figure 11 displays the 1/M graph for the test. Criticality was achieved with 12 elements installed and three of the blades fully withdrawn and the fourth blade at seventeen inches. The slow, deliberate approach taken ensured that criticality was achieved in a controlled manner. The initial placement of the test source in the center of the core resulted in a stable source level throughout the test. When it was moved for the last element addition, count rate was sufficiently high and stable to properly monitor the increase in reactivity from addition of the final element.

Thermal Neutron Flux Dist HEU vs LEU at 2MW

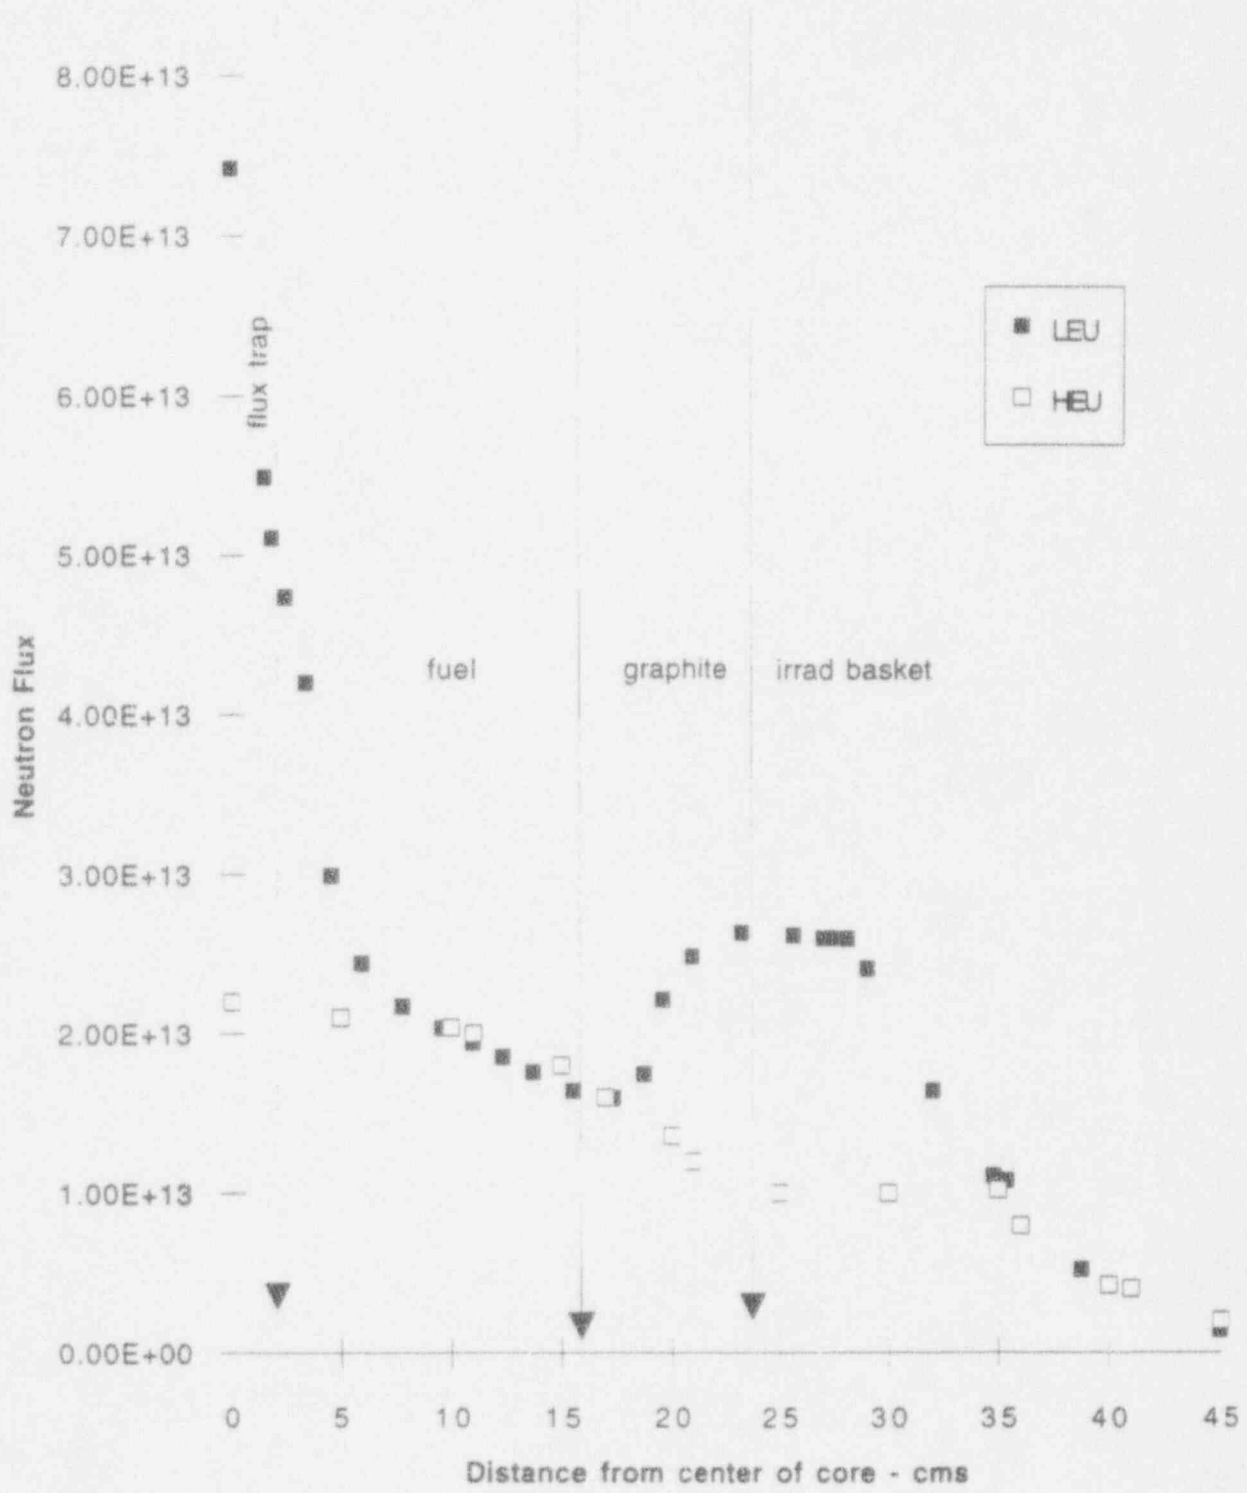


FIGURE 10

LEU CRITICAL EXPERIMENT #1 8/18/93

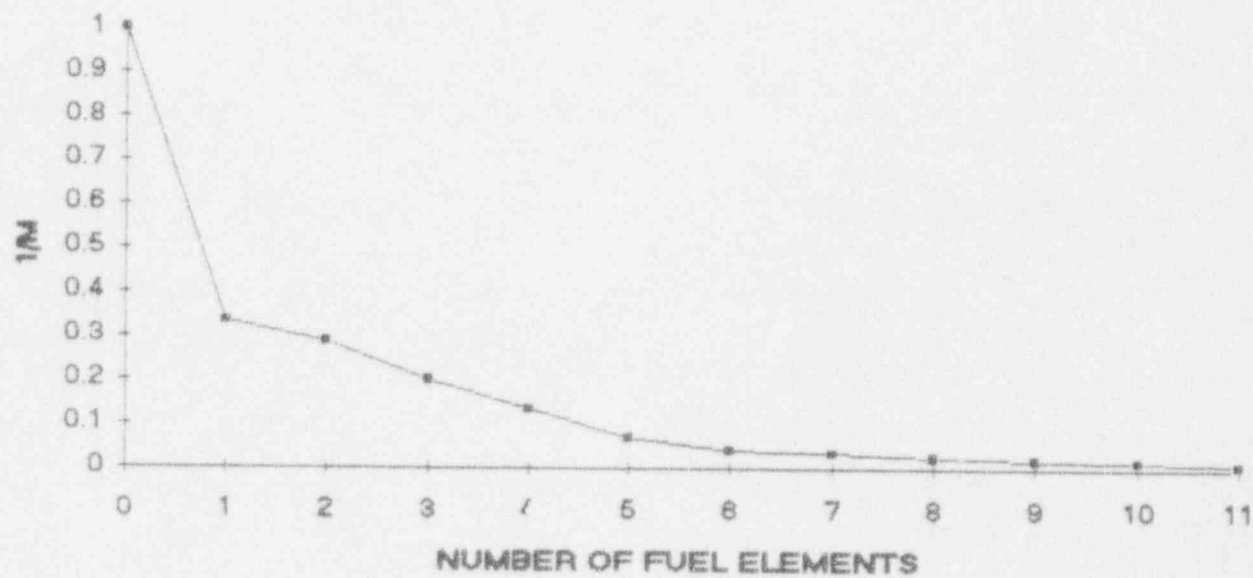


FIGURE 11

Negative Temperature Coefficient

The Technical Specification requirement for Negative Temperature Coefficient requires that it be checked after change in fuel type and that the value be negative. The calculated value for the HEU reference core was $-2.0\Delta K/K \times 10^{-4}/^{\circ}C$ and the calculated value for the start up LEU core was $-1.8\% \Delta K/K \times 10^{-4}/^{\circ}C$. The actual value was determined to be negative by core reactivity and temperature measurements conducted on October 7, 1994.

Void Coefficient of Reactivity

The void coefficient for the HEU core was calculated at $-1.5 \times 10^{-3} \% \Delta K/K / \% \text{ void}$. The calculated value for the LEU core was $-2.7 \times 10^{-3} \% \Delta K/K / \% \text{ void}$. The measured void coefficient for the LEU core was $-3.3 \times 10^{-3} \% \Delta K/K / \% \text{ void}$ which compared favorably with the calculated value.

SUMMARY

Initial results for the conversion of the core to LEU are quite favorable. The design objectives have been met and a significant performance improvement has been achieved. More testing will be required as the core is re-configured to achieve the final reflector geometry. As the fuel is depleted, the resulting higher rod positions will allow for better flux measurements at the beam ports.

The lower primary flow resulting from the higher core differential pressure can be resolved by installation of a larger primary pump. Relocation of the wide range linear detectors to a location next to the grid box will resolve the problem with inadequate flux at the detectors. Following these modifications, a final report will be issued.

¹ DiMeglio, A.F., Matos, J.E., and Freese, K.E.: Conversion, Core Redesign and Upgrade of Rhode Island Atomic Energy Commission Reactor, Proceedings of the 1987 International Meeting on Reduced Enrichment for Research and Test Reactors, Buenos Aires, Argentina, 28 September - 10 October, 1987.

² Glasstone, Samuel & Alexander Sesonske, Nuclear Reactor Engineering, Van Nostrand Company, New York, 1981, p.247.

³ Nunes, A.C., Jeng, U., Crow, M.L., Lin, D., Bai, A., Steyerl, A., Malik, S.S., Jacob, N., "Conversion of RINSC Reactor to Use of Low Enriched Fuel Effect on Beam Port Flux." Physics Department, University of Rhode Island, December 31, 1993.