

### Department of Energy Office of Legacy Management

OCT 0 8 2009

Mr. Don Aragon, Executive Director Wind River Environmental Quality Commission Building 10, Washakie Street Fort Washakie, Wyoming 82514

Subject: Transmittal of the Data Validation Package for the Riverton, Wyoming, Site, June 2009

Dear Mr. Aragon:

Enclosed is your copy of the data validation package presenting results of the validation and evaluation of the data collected during June 2009 sampling event conducted at the Riverton, Wyoming, processing site.

This sampling event consisted of sampling 19 monitor wells, 6 domestic wells, and 9 surface water locations at the Riverton processing site as specified in the *Long-Term Management Plan* for the Riverton, Wyoming, Processing Site.

Although concentrations of molybdenum and uranium in samples collected from surficial aquifer wells continue to exceed their respective U. S. Environmental Protection Agency (EPA) groundwater standard, concentrations of molybdenum and uranium in samples collected from semi-confined aquifer monitor wells and confined aquifer domestic wells were below their respective EPA standard.

All data were checked against laboratory analytical quality control criteria and data not meeting the criteria were qualified per the *Standard Practice for Validation of Laboratory Data*. All data in this package are considered validated and available for use.

Please contact me at (970) 248-6016 or Sam Campbell at (970) 248-6654 with any questions.

Sincerely

Site Manager

#### Enclosure

2597 B 3/4 Road, Grand Junction, CO 81503	D	3600 Collins Ferry Road, Morgantown, WV 26505
1000 Independence Ave., S.W., Washington, DC 20585	0	11025 Dover St., Suite 1000, Westminster, CO 80021
10995 Hamilton-Cleves Highway, Harrison, OH 45030	0	955 Mound Road, Miamisburg, OH 45342
232 Energy Way, N. Las Vegas, NV 89030	0	
REPLY TO: Grand Junction Office		

# OCT 0 8 2009

cc w/ enclosure:

R. Chang, NRC

J. Arum, Ziontz, Chestnut, Varnell, Berley, and Slonim

B. Crocker, Baldwin and Crocker

J. Erickson, Dept. of Environmental Quality/Wyoming

I. Posey, Eastern Shoshone Tribal Chairman

J. Redman, Northern Arapaho Utility Organization

H. Spoonhunter, Northern Arapaho Tribal Chairman Riverton Branch Library

cc w/o enclosure:

S. Campbell, Stoller (e)

C. Carpenter, Stoller (e)

File: RVT 410.02 (Roberts)

Sampling Events-DVPs-VMRs\Riverton\DVP Riverton June 2009.doc

LMS/RVT/S00609

# **Data Validation Package**

# June 2009 Groundwater and Surface Water Sampling at the Riverton, Wyoming, Processing Site

観視市

August 2009



Legacy Management

# Contents

Sampling Event Summary	1
Riverton, Wyoming, Processing Site, Sample Locations	
Data Assessment Summary	5
Water Sampling Field Activities Verification Checklist	
Laboratory Performance Assessment	
Sampling Quality Control Assessment	18
Certification	

#### Attachment 1—Assessment of Anomalous Data

Potential Outliers Report

 $\Box$ 

 $\sum$ 

#### **Attachment 2—Data Presentation**

Groundwater Quality Data Surface Water Quality Data Equipment Blank Data Static Water Level Data Time-Concentration Graphs

#### Attachment 3—Sampling and Analysis Work Order

**Attachment 4—Trip Report** 

# This page intentionally left blank

ŗ.

# **Sampling Event Summary**

The draft 2007 Long-Term Management Plan (LTMP) for the Riverton, Wyoming, Processing Site requires semiannual monitoring to evaluate groundwater conditions and assess the progress of natural flushing of the uppermost aquifer. This event involved sampling 19 monitor wells, 9 surface water locations, and 6 domestic wells at the Riverton, Wyoming, Processing Site. Monitor well 0735 was not sampled for safety concerns. High flows of the Little Wind River had eroded the escarpment (10 foot drop to the river) to the edge of the well. Water levels were measured at all sampled monitor wells and 15 additional monitor wells that were not sampled. Sampling and analysis was conducted as specified in LTMP and the Sampling and Analysis Plan for the U. S. Department of Energy Office of Legacy Management Sites (LMS/PLN/S04351, continually updated).

Concentrations of molybdenum and uranium in samples collected from semi-confined aquifer monitor wells were below the respective U.S. Environmental Protection Agency (EPA) (Title 40 *Code of Federal Regulations* [CFR] Part 192) groundwater standard. Although concentrations of molybdenum and uranium in the surficial aquifer currently exceed their respective EPA groundwater standard, concentrations continue to trend downward at most locations as shown in the time-concentration graphs, which are included in the Data Presentation section. Groundwater modeling predicts that natural flushing of the surficial aquifer will reduce concentrations below standards within 100 years. Progress of natural flushing will be assessed in the annual Verification Monitoring Report, which will include results from both 2009 sampling events (June and November). The EPA groundwater standards for molybdenum and uranium were exceeded in samples collected from surficial aquifer monitor wells listed in Table 1.

Analyte	Standard <sup>a</sup>	Location	Concentration
Molybdenum	0.1	0707	0.59
		0716	0.17
		0789	0.36
Uranium	0.044	0707	0.74
		0716	0.19
· · · · · · · · · · · · · · · · · · ·		0718	0.19
		0722R	0.70
		0789	2.10

Table 1. Riverton Wells with Samples that Exceeded EPA Groundwater Standards in November 2008

<sup>a</sup>Standards are listed in 40 CFR 192.02 Table 1 to Subpart A; concentrations are in milligrams per liter (mg/L).

Results from domestic wells (locations 0405, 0430, 0436, 0460, 0828, and 0836) did not indicate any impacts from the Riverton site. Concentrations of molybdenum and uranium in samples collected from domestic wells were below EPA groundwater and drinking water standards, respectively.

Surface water results were compared to the benchmark value for uranium (0.011 milligram per liter [mg/L]) derived from historical data at surface water location 0794, which is on the Little Wind River upstream of the site and represents background conditions (see sample location map). Uranium concentrations from Little Wind River locations 0796, 0811, and 0812 were below the benchmark value, which indicates minimal site-related impact on the water quality of the Little Wind River. In addition, the uranium concentration from surface water locations 0747 (Oxbow Lake), 0810 (constructed wetlands), 0822 (west side irrigation ditch), and 0823 (gravel pit pond) were below the benchmark value, which indicates minimal site-related impact to these surface water features.

The sample collected at the ditch that discharges from the Chemtrade sulfuric acid plant (0749) continues to have elevated concentrations of sulfate (1,800 mg/L). The elevated sulfate concentration in the sulfuric acid plant effluent has affected the sulfate concentration downstream in the west side irrigation ditch (780 mg/L at location 0822).

Water samples from 0822 (west side irrigation ditch) were analyzed for radium-226 and radium-228 in response to potentially elevated concentrations of these constituents in the sediments within the ditch. All radium concentrations were below detection limits, which indicates no impact to water quality in the ditch.


All

Sam Campbell Site Lead, S.M. Stoller

Date


DVP—June 2009, Riverton, Wyoming RIN 09052319 Page 2

 $\Box$ 

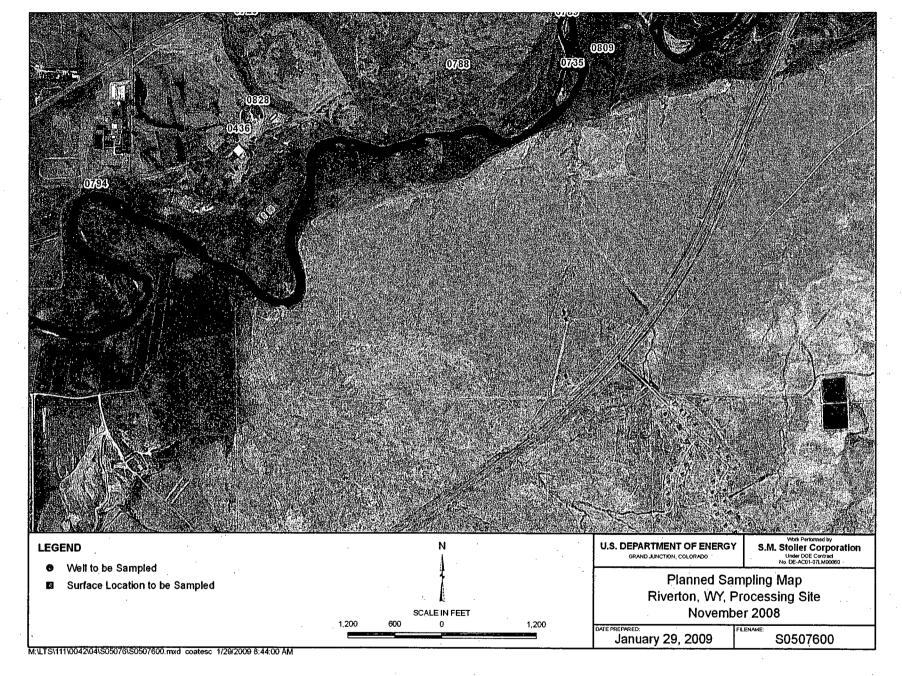

Riverton, Wyoming, Processing Site, Sample Locations



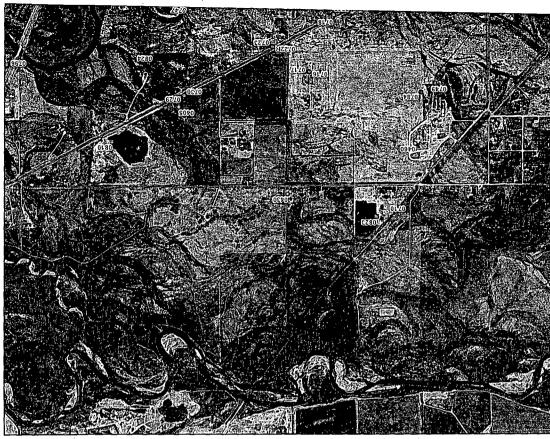

**4** 

# **Data Assessment Summary**

U.S. Department of Energy August 2009

1

# This page intentionally left blank

err-m

 $C^{-1}$ 

#### Project Riverton, Wyoming Date(s) of Water Sampling June 1-4, 2009 Date(s) of Verification July 20, 2009 Name of Verifier Steve Donivan Response Comments (Yes, No, NA) 1. Is the SAP the primary document directing field procedures? Yes Work Order Letter dated April 28, 2009. List other documents, SOPs, instructions. Monitor well 0735 was not sampled due to safety concerns. Domestic well 0836 was added to the list of wells and sampled 2. Were the sampling locations specified in the planning documents sampled? for the first time. No 3. Was a pre-trip calibration conducted as specified in the above-named documents? Pre-trip calibration was performed on May 29, 2009. Yes 4. Was an operational check of the field equipment conducted daily? Yes Did the operational checks meet criteria? Yes 5. Were the number and types (alkalinity, temperature, specific conductance, pH, turbidity, DO, ORP) of field measurements taken as specified? Yes 6. Was the category of the well documented? Yes 7. Were the following conditions met when purging a Category I well: Was one pump/tubing volume purged prior to sampling? Yes Did the water level stabilize prior to sampling? Yes Did pH, specific conductance, and turbidity measurements stabilize prior to sampling? Yes Was the flow rate less than 500 mL/min? Yes If a portable pump was used, was there a 4-hour delay between pump installation and sampling? NA

Water Sampling Field Activities Verification Checklist

#### Water Sampling Field Activities Verification Checklist (continued) Response Comments (Yes, No, NA) 8. Were the following conditions met when purging a Category II well: Was the flow rate less than 500 mL/min? Yes Was one pump/tubing volume removed prior to sampling? Yes 9. Were duplicates taken at a frequency of one per 20 samples? Yes Duplicate samples were collected at locations 0716 and 0789. 10. Were equipment blanks taken at a frequency of one per 20 samples that were collected with nondedicated equipment? One equipment blank was collected. Yes 11. Were trip blanks prepared and included with each shipment of VOC samples? NA 12. Were QC samples assigned a fictitious site identification number? Yes Location IDs 2644, 2645, and 2646 were used for QC samples. Was the true identity of the samples recorded on the Quality Assurance Sample Log or in the Field Data Collection System (FDCS) report? Yes 13. Were samples collected in the containers specified? Yes 14. Were samples filtered and preserved as specified? Yes 15. Were the number and types of samples collected as specified? Yes 16. Were chain of custody records completed and was sample custody maintained? Yes 17. Are field data sheets signed and dated by both team members (hardcopies) or are dates present for the "Date Signed" fields (FDCS)? Yes 18. Was all other pertinent information documented on the field data sheets? Yes 19. Was the presence or absence of ice in the cooler documented at every sample location? Yes 20. Were water levels measured at the locations specified in the planning documents? Yes

DVP-June 2009, Riverton, Wyoming RIN 09052319 Page 8

> U.S. Department of Energy August 2009

#### Laboratory Performance Assessment

#### General Information

Report Number (RIN):	09052319
Sample Event:	June 1–4, 2009
Site(s):	Riverton, Wyoming
Laboratory:	ALS Laboratory Group, Fort Collins, Colorado
Work Order No.:	0906080
Analysis:	Metals, Wet Chemistry, and Radiochemistry
Validator:	Steve Donivan
Review Date:	July 17, 2009

This validation was performed according to the *Environmental Procedures Catalog* (LMS/PRO/S04325) "Standard Practice for Validation of Laboratory Samples." The procedure was applied at Level 3, Data Validation. All analyses were successfully completed. The samples were prepared and analyzed using accepted procedures based on methods specified by line item code, which are listed in Table 2.

#### Table 2. Analytes and Methods

Analyte	Line Item Code	Prep Method	Analytical Method
Manganese	LMM-01	SW-846 3005A	SW-846 6010B
Molybdenum, Uranium	LMM-02	SW-846 3005A	SW-846 6020A
Radium-226	GPC-A-018	PA SOP712R14	PA SOP724R10
Radium-228	GPC-A-020	PA SOP746R8	PA SOP724R10
Sulfate	MIS-A-044	MCAWW 300.0	MCAWW 300.0

#### Data Qualifier Summary

Analytical results were qualified as listed in Table 3. Refer to the sections below for an explanation of the data qualifiers applied.

#### Table 3. Data Qualifier Summary

Sample Number	Location	Analyte(s)	Flag	Reason
0906080-2	0430	Uranium	U	Less than 5 times the calibration blank
0906080-3	0436	Manganese	Ú	Less than 5 times the method blank
0906080-3	0436	Uranium	U	Less than 5 times the calibration blank
0906080-4	0460	Manganese	. U	Less than 5 times the method blank
0906080-4	0460	Uranium	υ	Less than 5 times the calibration blank
0906080-11	0719	Manganese	U	Less than 5 times the method blank
0906080-12	0720	Molybdenum	Ų	Less than 5 times the calibration blank
0906080-13	0721	Uranium	· U	Less than 5 times the calibration blank
0906080-15	0723	Molybdenum	U	Less than 5 times the method blank
0906080-15	0723	Uranium	U	Less than 5 times the method blank

Page 9

Sample Number	Location	Analyte(s)	Flag	Reason
0906080-18	0747	Molybdenum	U	Less than 5 times the calibration blank
0906080-23	0794	Molybdenum	U	Less than 5 times the calibration blank
0906080-24	0796	Molybdenum	U	Less than 5 times the method blank
0906080-26	0810	Molybdenum	U	Less than 5 times the calibration blank
0906080-27	0811	Molybdenum	U	Less than 5 times the method blank
0906080-28	0812	Molybdenum	U	Less than 5 times the method blank
0906080-34	0836	Uranium	U	Less than 5 times the method blank
0906080-36	Equipment Blank	Molybdenum	U	Less than 5 times the method blank
0906080-36	Equipment Blank	Uranium	U	Less than 5 times the method blank

Table 3 (continued). Data Qualifier Summary

#### Sample Shipping/Receiving

ALS Laboratory Group in Fort Collins, Colorado, received 37 water samples on June 9, 2009, accompanied by a Chain of Custody (COC) form. The COC form was checked to confirm that all of the samples were listed with sample collection dates and times, and that signatures and dates were present indicating sample relinquishment and receipt. The sample submittal documents had no errors or omissions.

#### Preservation and Holding Times

The sample shipment was received cool and intact with the temperature inside the iced cooler at 1.4 °C, which complies with requirements. All samples were received in the correct container types and had been preserved correctly for the requested analyses.

#### Laboratory Instrument Calibration

Compliance requirements for satisfactory instrument calibration are established to ensure that the instrument is capable of producing acceptable qualitative and quantitative data for all analytes. Initial calibration demonstrates that the instrument is capable of acceptable performance in the beginning of the analytical run and of producing a linear curve. Compliance requirements for continuing calibration checks are established to ensure that the instrument continues to be capable of producing acceptable qualitative and quantitative data. All laboratory instrument calibrations were performed correctly in accordance with the cited methods.

#### Method SW-846 6010, Manganese

Calibration for manganese was performed on June 16, 2009, using one calibration standard. Calibration and laboratory spike standards were prepared from independent sources. Initial and continuing calibration verification checks were made at the required frequency resulting in seven verification checks. All calibration checks met the acceptance criteria. Reporting limit verification checks were made at the required frequency to verify the linearity of the calibration curve near the practical quantitation limit and all results were within the acceptance range.

#### Method SW-846 6020, Molybdenum and Uranium

Calibrations for molybdenum and uranium were performed on June 16, 2009, using seven calibration standards. The calibration curve correlation coefficient values were greater than 0.995 and the absolute values of the intercepts were less than 3 times the method detection limit (MDL). Calibration and laboratory spike standards were prepared from independent sources. Initial and continuing calibration verification checks were made at the required frequency resulting in seven verification checks. All calibration checks met the acceptance criteria. Reporting limit verification checks were made at the required frequency to verify the linearity of the calibration curve near the practical quantitation limit and all results were within the acceptance range. Mass calibration and resolution verifications were performed at the beginning of each analytical run in accordance with the analytical procedure. Internal standard recoveries associated with requested analytes were stable and within acceptable ranges.

#### Method SW-846 9056, Sulfate

The calibration for sulfate was performed using five calibration standards on May 27, 2009. The calibration curve correlation coefficient value was greater than 0.995 and the absolute value of the intercept was less than 3 times the MDL. Initial calibration and calibration check standards were prepared from independent sources. Initial and continuing calibration verification checks were made at the required frequency resulting in six verification checks. The calibration checks met the acceptance criteria.

#### Radiochemical Analysis

All radiochemical results reported included the calculated two-sigma total propagated uncertainty (TPU) and minimum detectable concentration (MDC). Radiochemical results are qualified with a "J" flag (estimated) when the result is greater than the MDC, but less than 3 times the MDC. Radiochemical results are qualified with a "U" flag (not detected) when the result is greater than the MDC but less than the two-sigma TPU.

#### Radium-226

Samples were screened for radium-226 by gas flow proportional counting. Plateau voltage determinations and detector efficiency calibrations were performed in November 2008. Daily instrument checks met the acceptance criteria. The chemical recoveries met the acceptance criteria of 40 to 110 percent for all samples.

#### Radium-228

Plateau voltage determinations and detector efficiency calibrations were performed in November 2008. Daily instrument checks met the acceptance criteria. The chemical recoveries met the acceptance criteria of 40 to 110 percent for all samples.

#### Method and Calibration Blanks

Method blanks are analyzed to assess any contamination that may have occurred during sample preparation. Calibration blanks are analyzed to assess instrument contamination prior to and during sample analysis.

#### Metals and Wet Chemistry

All method blank and calibration blank results associated with the samples were below the practical quantitation limits for all analytes. In cases where a blank concentration exceeds the method detection limit (MDL), the associated sample results are qualified with a "U" flag (not detected) when the sample result is greater than the MDL but less than 5 times the blank concentration. For manganese, all blank results were negative and the absolute values were greater than the MDL but less than the practical quantitation limit. Associated manganese results that were less than 5 times the MDL are qualified with a "J" flag as estimated values.

#### Radiochemistry

The radium-226 and radium-228 method blank results were below the MDC.

#### Inductively Coupled Plasma (ICP) Interference Check Sample (ICS) Analysis

ICP interference check samples ICSA and ICSAB were analyzed at the required frequency to verify the instrumental interelement and background correction factors. All check sample results met the acceptance criteria.

#### Matrix Spike Analysis

Matrix spike and matrix spike duplicate (MS/MSD) samples are used to measure method performance in the sample matrix. Spike samples were analyzed for manganese, molybdenum, sulfate, and uranium. The MS/MSD analyses resulted in acceptable recovery and precision for all analytes.

#### Laboratory Replicate Analysis

Laboratory replicate sample results demonstrate acceptable laboratory precision. The relative percent difference values for the non-radiochemical sample replicates and matrix spike replicates were less than 20 percent for results that are greater than 5 times the practical quantitation limit, indicating acceptable precision. The radiochemical relative error ratio (calculated using the one-sigma total propagated uncertainty) for the laboratory control sample replicates was less than three, indicating acceptable precision.

#### Laboratory Control Sample

Laboratory control samples were analyzed at the correct frequency to provide information on the accuracy of the analytical method and the overall laboratory performance, including sample preparation. All control sample results were acceptable with the exception of the radium-228 laboratory control sample. Radium-228 was not detected in the associated sample.

#### Metals Serial Dilution


Serial dilutions were prepared and analyzed for the metals analyses to monitor chemical or physical interferences in the sample matrix. Serial dilution data are evaluated when the concentration of the undiluted sample is greater than 100 times the practical quantitation limit

(PQL) for ICP-MS or greater than 50 times the PQL for ICP. All evaluated serial dilution data were acceptable.

#### Detection Limits/Dilutions

Samples were diluted in a consistent and acceptable manner when required. The samples were diluted prior to analysis of molybdenum and uranium to reduce interferences. The required detection limits were met for all metals and wet chemistry analytes.

All radiochemical MDCs were calculated using the following equation as specified in *Quality Systems for Analytical Services* revision 2.4.



Where:

b = background count rate (cpm) K = Efficiency factor T = Count time in minutes

The calculation of the MDCs using the equation above was verified. All reported MDCs were less than the required MDCs.

#### Completeness

Results were reported in the correct units for all analytes requested using contract-required laboratory qualifiers.

#### Chromatography Peak Integration

The integration of analyte peaks was reviewed for all ion chromatography data. There were no manual integrations performed and all peak integrations were satisfactory.

#### Electronic Data Deliverable (EDD) File

The EDD file arrived on July 1, 2009. The Sample Management System EDD validation module was used to verify that the EDD file was complete and in compliance with requirements. The module compares the contents of the file to the requested analyses to ensure all and only the requested data are delivered. The contents of the EDD were manually examined to verify that the sample results accurately reflect the data contained in the sample data package.

N: 09052319 Lab Cod	e: PAR Validator: Steve Donivan Validation Date: 7/17/2009
oject: Riverton	Analysis Type: 🗹 Metals 🗹 General Chem 🗹 Rad 📋 Organics
of Samples: <u>37</u> Matrix:	WATER Requested Analysis Completed: Yes
·	
Chain of Custody	Sample
Present: <u>OK</u> Signed: <u>OK</u>	Dated: OK Integrity: OK Preservation: OK Temperature: OK
Select Quality Parameters	
Holding Times	All analyses were completed within the applicable holding times,
Detection Limits	The reported detection limits are equal to or below contract requirements.
Field/Trip Blanks	There was 1 trip/equipment blank evaluated.
Field Duplicates	There were 2 duplicates evaluated.
a a set a	

Page 1 of 1

#### SAMPLE MANAGEMENT SYSTEM

#### Metals Data Validation Worksheet

RIN: 09052319 Matrix: Water

-

Lab Code: <u>PAR</u> Site Code: <u>RVT</u>

Date Completed: 7/2/2009

Date Due: 7/7/2009

Analyte Date Analyzed					Method	ethod LCS %R		MSD %R	Dup. RPD	ICSAB %R	Serial Dil. %R	CRI %R			
		Int.	R^2	ICV	ccv	ICB	ССВ	Blank							
MANGANESE	06/16/2009			ОК	ОК	ОК	OK	ОК	101.0	94.0	91.0	3.0	91.0	7.0	101.0
MANGANESE	06/16/2009		CONTRACTOR OF CONTRACT			l .	ŀ	OK	99.0	95.0	97.0	1.0	89.0		97.0
MOLYBDENUM	06/16/2009	0.0000	1.0000	ΟК	ОК	ОК	ОК	ОК	99.0	109.0	106.0	2.0	112.0	5.0	108.0
MOLYBDENUM	06/16/2009					[		ОК	104.0	99.0	101.0	2.0			
URANIUM	06/16/2009	0.0000	1.0000	OK	OK	ОК	OK	OK	101.0	103.0	98.0	2.0	103.0	50	102.0
URANIUM	06/16/2009						1	OK	106.0	102.0	102.0	0.0		Î Î	

Page 1 of 1

1.

<u>. . . .</u>

#### SAMPLE MANAGEMENT SYSTEM

#### Wet Chemistry Data Validation Worksheet

RIN: 09052319 Matrix: Water Lab Code: <u>PAR</u> Site Code: <u>RVT</u> Date Due: <u>7/7/2009</u> Date Completed: <u>7/2/2009</u>

Analyte	Date Analyzed						MS %R	MSD %R	DUP RPD	Serial Dil %R			
		Int.	R^2	ICV	ccv	ICB	ССВ	Blank					
SULFATE	06/16/2009	0.000	1.0000	ок	ОК	ОК	ОК	OK	95.00	106.0	105.0	0	
SULFATE	06/16/2009	· .		{				OK	98.00	106.0	100.0	2.00	1
SULFATE	06/16/2009		L				[			105.0			
SULFATE	06/16/2009				T T		<u> </u>	T	(	101.0			

Page 1 of 1

### SAMPLE MANAGEMENT SYSTEM **Radiochemistry Data Validation Worksheet**

RIN: 09052319

Lab Code: PAR

Date Due: 7/7/2009

1[

Matrix: Water

<u>,</u>

-----

 $\Box$ 

Site Code: <u>RVT</u>

Date Completed: 7/2/2009

Sample	Analyte	Date Analyzed	Result	Flag	Tracer %R	LCS %R	MS %R	Duplicate
0822	Radium-226	06/30/2009		<u> </u>	86.5			
Blank_Spike	Radium-226	06/30/2009		Î	91.7	105.0		
Blank_Spike_Du	Radium-226	06/30/2009		1	94.6	104.0	<u>n</u> tid	0.07
Blank	Radium-226	06/30/2009	0.1490	U	91.8			
0822	Radium-228	06/18/2009		Ì	63.7			Í
Blank_Spike	Radium-228	06/18/2009		Î	65.2	132.0		
Blank_Spike_Du	Radium-228	06/18/2009		Î	64.0	106.0		0.97
Blank	Radium-228	06/18/2009	0.1240	U	70.8			

#### Sampling Quality Control Assessment

The following information summarizes and assesses quality control for this sampling event.

#### Sampling Protocol

Surface water locations were sampled using a peristaltic pump and tubing reel. Monitor wells were sampled using a peristaltic pump and dedicated tubing. Domestic wells were sampled by filling bottles at the discharge point.

Sample results for all monitor wells met the Category I or II low-flow sampling criteria and were qualified with an "F" flag in the database, indicating the wells were purged and sampled using the low-flow sampling method.

Wells 0705 and 0719 were classified as Category II. The sample results for these wells were qualified with a "Q" flag, indicating the data are qualitative because of the sampling technique.

#### Equipment Blank Assessment

An equipment blank (field ID 2645) was collected after decontamination of the non-dedicated tubing reel used to collect some surface water samples. Manganese was detected in this blank. All associated sample results were greater than 5 times the blank concentration. The equipment blank results indicate adequate decontamination of the sampling equipment.

#### Field Duplicate Assessment

Field duplicate samples are collected and analyzed as an indication of overall precision of the measurement process. The precision observed includes both field and laboratory precision and has more variability than laboratory duplicates, which measure only laboratory performance. Duplicate samples were collected from locations 0716 and 0789 (field duplicate IDs 2644 and 2646). The duplicate results were acceptable, meeting the EPA recommended laboratory duplicate criteria of less than 20 percent relative difference for results that are greater than 5 times the PQL.

r in

### SAMPLE MANAGEMENT SYSTEM

Page 1 of 1

### Validation Report: Equipment/Trip Blanks

RIN: 09052319

.

 $\square$ 

Į.

t" 1

Lab Code: PAR

Project: Riverton

Validation Date: 7/17/2009

Blank Type Lab Sample ID		Lab Method	Analyte Name		Result	Qualifier	MDL	Units
Equipment Blank	0906080-36	SW6010	MANGANESE		1.1	. B	0.12 .UG/L	
Sample ID	Sample Ticket	Location	Result	Dilution F	actor I	ab Qualifier	Validatio	on Qualifie
0906080-18	HGZ 203	0747	77	1		•		-
0906080-19	HGZ 204	0749	64	1				•
0906080-23	HGZ 205	0794	9.7	1	,			
0906080-24	HGZ 206	0796	8.2	1				
0906080-26	HGZ 207	0810	36	1				
0906080-27	HGZ 208	0811	9.3	1				
0906080-28	HGZ 209	0812	10	1				
0906080-29	HGZ 210	0822	19	1				
0906080-30	HGZ 211	0823	68	1				

U.S. Department of Energy August 2009

# SAMPLE MANAGEMENT SYSTEM

Page 1 of 1

### Validation Report: Field Duplicates

RIN: 09052319 Lab Code: PAR Project: Riverton Validation Date: 7/17/2009

Duplicate: 2644

Sample: 0716

Sample			T Duplicate—				
Result	Flag	Error	Result	Flag Error	RPD	RER	Units
340		······································	360		5.71		UG/L
170			160		6.06		UG/L
290	١		300		3.39		MG/L
190		1 - A	190		0	•	UG/L
	Result 340 170 290	Result Flag   340 170   290 1	Result Flag Error   340 170 290 1	Result Flag Error Result   340 360 160   170 160 300	ResultFlagErrorResultFlagError340360170160290300	Result Flag Error Result Flag Error RPD   340 360 5.71   170 160 6.06   290 300 3.39	Result Flag Error Result Flag Error RPD RER   340 360 5.71 1 6.06 290 300 3.39

Duplicate: 2646	Sample: 07	'89								
· · · · · · · · · · · · · · · · · · ·	- Sample			Duplicate						
Analyte	Result	Flag	Error	Result	Flag	Error	RPD	RER	Units	
MANGANESE	33			31	-		6.25		UG/L	
MOLYBDENUM	360			340			5.71		UG/L	
SULFATE	4500			4700		•	4.35		MG/L	
URANIUM	2100			2100			0	1	UG/L	
· · ·	•									

DVP—June 2009, Riverton, Wyoming RIN 09052319 Page 20 U.S. Department of Energy August 2009

#### Certification

All laboratory analytical quality control criteria were met except as qualified in this report. The data qualifiers listed on the SEEPro database reports are defined on the last page of each report. All data in this package are considered validated and available for use.

Laboratory Coordinator:

<del>|</del>\_\_\_\_

<u>\_\_\_\_</u>

tere Done

Steve Donivan

8-27-200

Date

Data Validation Lead:

Steve Donivan

8-27-2009

Date

DVP—June 2009, Riverton, Wyoming RIN 09052319 Page 22

This page intentionally left blank

. .

# Attachment 1 Assessment of Anomalous Data

Ī.,

.

(``)

# This page intentionally left blank

 $\left[ \begin{array}{c} \\ \end{array} \right]$ 

# **Potential Outliers Report**

m

This page intentionally left blank

1. . 1. .

11

#### **Potential Outliers Report**

Potential outliers are measurements that are extremely large or small relative to the rest of the data and, therefore, are suspected of misrepresenting the population from which they were collected. Potential outliers may result from transcription errors, data-coding errors, or measurement system problems. However, outliers may also represent true extreme values of a distribution and indicate more variability in the population than was expected.

Statistical outlier tests give probabilistic evidence that an extreme value does not "fit" with the distribution of the remainder of the data and is therefore a statistical outlier. These tests should only be used to identify data points that require further investigation. The tests alone cannot determine whether a statistical outlier should be discarded or corrected within a data set.

There are three steps involved in identifying extreme values or outliers:

- 1. Identify extreme values that may be potential outliers by generating the Outliers Report using the Sample Management System from data in the SEEPro database. The application compares the new data set with historical data and lists the new data that fall outside the historical data range. A determination is also made if the data are normally distributed using the Shapiro-Wilk Test.
- 2. Apply the appropriate statistical test. Dixon's Extreme Value test is used to test for statistical outliers when the sample size is less than or equal to 25. This test considers both extreme values that are much smaller than the rest of the data (case 1) and extreme values that are much larger than the rest of the data (case 2). This test is valid only if the data without the suspected outlier are normally distributed. Rosner's Test is a parametric test that is used to detect outliers for sample sizes of 25 or more. This test also assumes that the data without the suspected outliers are normally distributed.
- 3. Scientifically review statistical outliers and decide on their disposition.

The specific conductance and sulfate concentrations in Oxbow Lake at location 0747 were identified as anomalously low. Oxbow Lake was receiving water from the Little Wind River at the time of sampling causing dilution and reduction of contaminant concentrations.

The specific conductance, sulfate, and uranium concentrations in monitor well 0789 were identified as anomalously high. These data are considered acceptable as qualified based on the following.

- A field duplicate was collected from this location and submitted to the laboratory with a fictitious location ID. The duplicate results were in close agreement with the original sample.
- The molybdenum and uranium analyses were performed simultaneously using a diluted sample aliquot. The uranium concentration was higher than the historical values; however, the molybdenum was lower than the values previously observed, indicating that an analytical error is highly unlikely.

# Data Validation Outliers Report - No Field Parameters Laboratory: PARAGON (Fort Collins, CO) RIN: 09052319 Comparison: All Historical Data Report Date: 8/3/2009

Site	Location	Sample Date	Analyte	Ci Result	Carden de la composición de la	alifiers Data	Historic Result	<b>al Maxin</b> Quali Lab	fiers	Historic Result	al Minim Quali Lab			nber of a Points N Below	Normally Distributed	Statistica Outlier
Code RVT01	Code 0460	06/02/2009	Sulfate	150	nij te det		170	<u> </u>		155	1		<u></u>	Detect 0	No	No
RVT01	0716	06/02/2009	Sulfate	290		F	850			320		F	24	0	Yes (log)	No
RVT01	0716	06/02/2009	Uranium	0.19		F	0.718			0.21		F	25	0	No	Yes
RVT01	0717	06/02/2009	Manganese	0.26		F	0.24		F	0.017	••••	F	21	0	No	No
RVT01	0718	06/04/2009	Manganese	0.37		F	3.28			0.93	• •	F	22	0	Yes	No
RVT01	0718	06/04/2009	Molybdenum	0.073		F	0.15			0.084		F	22	0	Yes	No
RVT01	0719	06/04/2009	Manganese	0.0022	В	UFQ	0.24	· .	F	0.0032	в	FQ	21	. 0	Yes	No
RVT01	0720	06/03/2009	Molybdenum	0.0012		UF	0.01	U ·	· .	0.0013		F	18	5	No	No
RVT01	0747	06/03/2009	Manganese	0.077			2.5			0.17			25	0	No	Yes
RVT01	0747	06/03/2009	Molybdenum	0.001		U	0.032		J	0.008 _	В		25	0	No	Yes
RVT01	0747	06/03/2009	Sulfate	50			2600			160			25	0	Yes (log)	Yes
RVT01	0747	06/03/2009	Uranium	0.004			0.662			0.063			27	0	Yes (log)	No
RVT01	0784	06/02/2009	Manganese	0.26		F	0.54		F	0.3		F	· 6, ·	0	Yes	No
RVT01	0784	06/02/2009	Uranium	0.0027		F	0.0094		F	0.0055		F	6	0	No	No
RVT01	0789	06/03/2009	Manganese	0.033		F	0.82		.F	0.15		F.	7	0	Yes	No
RVT01	0789	06/03/2009	Molybdenum	0.36		F	0.51		F	0.38	-	F	7	0	No	No
RVT01	0789	06/03/2009	Sulfate	4500		F	4000		F	3500		F	7	0	Yes	Yes
RVT01	0789	06/03/2009	Uranium	, 2.1		F	1.7		F	1.3		F	8	0	Yes	Yes
													•••••••••••••••••••••••••••••••••••••••			

# Data Validation Outliers Report - No Field Parameters Laboratory: PARAGON (Fort Collins, CO) RIN: 09052319 Comparison: All Historical Data Report Date: 8/3/2009

۰ ---- ۲ . -

[ ` ]

Site	Location	Sample Date	Analyte	Curr Result	ent Qualifiers Lab Data	Historic Result	Qua	num lifiers Data	Historic Result	al Minimu Qualifi Lab	ers	1. N. C. F. F.	nber of I Points N Below	Normally Distributed	Statistical Outlier
Code RVT01	Code 0794	06/02/2009	Sulfate	38	<u> 1888 - 1898 - 1898 - 1898 - 1898 - 1898</u> - 1999 - 1999 - 1999 - 1999 - 1999 - 1999 - 1999 - 1999 - 1999 - 1999 - 1999 - 1999 - 1999 - 1999 - 1999 - 1999	468	<u>1948 (MAL)</u> 1		77		<u> (                                   </u>	26	<u>Detect</u> 0	No	No
RVT01	0794	06/02/2009	Uranium	0.0011	· · · · · · · · · · · · · · · · · · ·	0.011		· .	0.0017			28	1	No	No
RVT01	0796	06/02/2009	Sulfate	39		438			68			28	. 0	No	No
RVT01	0796	06/02/2009	Uranium	0.00084		0.0148			0.0015			30	1	No	No
RVT01	0809	06/03/2009	Molybdenum	0.0024	. F	0.0023		F	0.0013		UF	10	3	Yes	No
RVT01	0809	06/03/2009	Uranium	0.001	F	0.0055		F	0.0013		F	10	0	Yes	No
RVT01	0810	06/02/2009	Molybdenum	0.001	U	0.0021	В		0.0011			9	3	Yes	No
RVT01	0810	06/02/2009	Uranium	0.004		0.01			0.0046	*		11	0	Yes	No
RVT01	0812	06/04/2009	Uranium	0.0013		0.0072			0.0014			10	0	Yes (log)	No
RVT01	0822	06/03/2009	Sulfate	780		1500			901			10	0	Yes (log)	No
RVT01	0823	06/02/2009	Manganese	0.068		0.063			0.0019	В		7	1	Yes (log)	No
RVT01	0823	06/02/2009	Molybdenum	0.0024		0.0063	Е		0.0026			7	0	Yes	No
RVT01	0823	06/02/2009	Uranium	0.0037		0.013			0.0043			9	0	Yes	No
RVT01	0826	06/03/2009	Manganese	0.57	F	0.53		F	0.45		F	5	0 <sup>´</sup> .	Yes	No
RVT01	0826	06/03/2009	Molybdenum	0.021	F	0.026		F	0.022		F	5	0	Yes	No
RVT01	0826	06/03/2009	Uranium	0.036	F	0.034		F	0.026		F	5	0	Yes	No
RVT01	0828	06/02/2009	Sulfate	190		240			200	-		10	0	Yes	^No

ſ

1

Page 29

Data Validation Outliers Report - Field Parameters Only Laboratory: Field Measurements RIN: 09052319 Comparison: All Historical Data Report Date: 8/3/2009

[]]

				Currei	nt <i>Qualifiers</i>	Historical	Maximum Qualifiers	Histori	cal Minimum Qualifiers	13.6H 1	iber of Points	Normally Distributed	Statistical Outlier
Site Code	Location Code	Sample Date	Analyte	Result La	b Data	Result L	ab Data	Result	Lab Data	N	N Below Detect		
RVT01	0460	06/02/2009	Oxidation Reduction Potential	191.4		143		-31		9	0	Yes	No
RVT01	0716	06/02/2009	pH	7.34	F	7.25	, F	6.97 <sup>.</sup>	F	20	0	Yes	No
RVT01	0720	06/03/2009	Turbidity	9.23	F	5.41	F.	0		16	0	Yes (log)	No
RVT01	0747	06/03/2009	Specific Conductance	275		3680		614		17	0	Yes (log)	Yes
RVT01	0784	06/02/2009	Temperature	11.31	F	14.1	F .	11.72	F	6	0	Yes	No
RVT01	• 0789	06/03/2009	рН	7.37	F	7.2	F	6.98	· · ·	6	0	Yes	No
RVT01	0789	06/03/2009	Specific Conductance	7981	F	6636		6210	F	6	Ο.	Yes	Yes
RVT01	0789	06/03/2009	Turbidity	2.08	F	9.54		2.12	F	6	0	Yes	No
RVT01	0796	06/02/2009	рН	8.89		8.78		7.27		25	. 0	Yes	Nö
RVT01	0809	06/03/2009	рН	7.77	F	7.75	F	7.29	F	10	0	Yes	No
RVT01	0810	06/02/2009	рН	9.5	÷ .	9.39		8.49		10	0	Yes	No
RVT01	0811	06/03/2009	Specific Conductance	280		907	-	303		10	0	Yes	No
RVT01	0812	06/04/2009	pH	7.5	•	8.61		8.1		10	0	Yes	No
RVT01	0812	06/04/2009	Specific Conductance	250		922		262		10	0	Yes	No
RVT01	0823	06/02/2009	рН	9.38		9.2		8.19		9	0	No	No
RVT01	0828	06/02/2009	Specific Conductance	737		874		763		9	0	Yes	No

· · · ·

[]

#### SAMPLE ID CODES: 000X = Filtered sample (0.45 µm). N00X = Unfiltered sample. X = replicate number.

#### LAB QUALIFIERS:

- Replicate analysis not within control limits.
- > Result above upper detection limit.
- A TIC is a suspected aldol-condensation product.
- B Inorganic: Result is between the IDL and CRDL. Organic: Analyte also found in method blank.
- C Pesticide result confirmed by GC-MS.
- D Analyte determined in diluted sample.
- E Inorganic: Estimate value because of interference, see case narrative. Organic: Analyte exceeded calibration range of the GC-MS.
- H Holding time expired, value suspect.
- Increased detection limit due to required dilution.
- J Estimated
- N Inorganic or radiochemical: Spike sample recovery not within control limits. Organic: Tentatively identified compound (TIC).
- P > 25% difference in detected pesticide or Aroclor concentrations between 2 columns.
- U Analytical result below detection limit.
- W Post-digestion spike outside control limits while sample absorbance < 50% of analytical spike absorbance.
- X,Y,Z Laboratory defined qualifier, see case narrative.

#### DATA QUALIFIERS:

- F Low flow sampling method used.
- L Less than 3 bore volumes purged prior to sampling.
- U Parameter analyzed for but was not detected.
- G Possible grout contamination, pH > 9.

X Location is undefined.

Q Qualitative result due to sampling technique. R Unusable result.

J Estimated value.

- STATISTICAL TESTS: The distribution of the data is tested for normality or lognormality using the Shapiro-Wilk Test Outliers are identified using Dixon's Test when there are 25 or fewer data points. Outliers are identified using Rosner's Test when there are 26 or more data points. See Data Quality Assessment: Statistical Methods for Practitioners, EPA QC/G-9S, February 2006.

- .
  - Page 31

### This page intentionally left blank

### Attachment 2 Data Presentation

Ϊ.

ļ.,

£"3

### This page intentionally left blank

, ,

[. ]

## **Groundwater Quality Data**

### This page intentionally left blank

## Groundwater Quality Data by Location (USEE100) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009 Location: 0405 WELL

۳,

Parameter	Units	Sar Date	nple ID	Depth Range (Ft BLS)	Result	Quali Lab Da		Detection Limit	ertainty
Manganese	mg/L	06/02/2009	N001	-	0.0028	В	#	0.00012	
Molybdenum	mg/L	06/02/2009	N001	• ·	0.0033		#	0.00007	
Oxidation Reduction Potential	mV	06/02/2009	N001	-	141.6		#	· · · · · · · · · · · · · · · · · · ·	
pH	s.u.	06/02/2009	N001	. <b>-</b>	8.87	,	#		
Specific Conductance	umhos /cm	06/02/2009	N001	-	892		# .	· · · · · · · · · · · · · · · · · · ·	
Sulfate	mg/L	06/02/2009	N001	· · -	270		#	5	
Temperature	С	06/02/2009	N001	-	. 14.03	· · ·	#.		
Turbidity	NTU	06/02/2009	N001		4.26	· .	#		
Uranium	mg/L	06/02/2009	N001	-	0.00011	, ,	#	0.0000045	<u> </u>

# Groundwater Quality Data by Location (USEE100) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009 Location: 0430 WELL

Manganese	mg/L	06/01/2009	N001	-	0.0056			#	0.00012	
Molybdenum	mg/L	06/01/2009	 N001		0.0026		. <u></u>	#	0.00007	
Oxidation Reduction Potential	mV	06/01/2009	N001		243			#		
рН	s.u.	06/01/2009	N001		8.43			#	· ·	
Specific Conductance	umhos /cm	06/01/2009	N001	· _ · · · ·	729			#		
Sulfate	mg/L	06/01/2009	N001		180	•	•	#	5	
Temperature	C	06/01/2009	N001	-	10.9	······································		#		
Turbidity	NTU	06/01/2009	N001	· · ·	3.01			#		
Uranium	mg/L	06/01/2009	 N001		0.000065	В	U	# .	0.0000045	

# Groundwater Quality Data by Location (USEE100) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009 Location: 0436 WELL

. C -

: 1

3

Parameter	Units	Sam Date	ple ID	Depth Range (Ft BLS)	Result	Q Lab	ualifiers Data	QA	Detection Limit	Uncertainty
Manganese	mg/L	06/02/2009	N001	-	0.0023	B	U	#	0.00012	
Molybdenum	mg/L	06/02/2009	N001		0.0032			# .	0.00007	
Oxidation Reduction Potential	mV	06/02/2009	N001	-	216.6	,		#	· ·	
рН	s.u.	06/02/2009	N001	-	8.92			#		
Specific Conductance	umhos /cm	06/02/2009	N001	-	738		· .	#		
Sulfate	mg/L	06/02/2009	N001	·	190			#	5	
Temperature	C	06/02/2009	N001		18.02			#		
Turbidity	NTU	06/02/2009	N001	-	3.16			#		
Uranium	mg/L	06/02/2009	N001	-	0.000071	В	υ	#	0.0000045	

j.

### Groundwater Quality Data by Location (USEE100) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009 Location: 0460 WELL Koch Sulfuric Acid Plant

Parameter	Ünits	Sam Date	ple ID	Depth Range (Ft BLS)	Result	Lab	Qualifiers Data	GA QA	Detection Limit	Uncertainty
Manganese	mg/L	06/02/2009	N001	-	0.0017	В	U	#	0.00012	
Molybdenum	mg/L	06/02/2009	N001		0.003			. # .	0.00007	
Oxidation Reduction Potential	mV	06/02/2009	N001	-	191.4			#		
рН	s.u.	06/02/2009	N001	-	8.86			#	· · ·	
Specific Conductance	umhos /cm	06/02/2009	N001	-	682			#		
Sulfate	mg/L	06/02/2009	N001	-	150			#	5	
Temperature	С	06/02/2009	N001	· -	14.58			#		
Turbidity	NTU	06/02/2009	N001	-	3.03			#		· · · · · · · · · · · · · · · · · · ·
Uranium	mg/L	06/02/2009	N001		0.000067	В	U	#	0.0000045	

Page 40

### Groundwater Quality Data by Location (USEE100) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009 Location: 0705 WELL

٤.

Parameter	Units	Sam Date	ole ID		th Ra t BL	ange S)	Result	Qualifiers Lab Data	QA	Detection	Uncertainty
Manganese	mg/L	06/03/2009	N001	37.3	-	61.8	0.0095	FQ	#	0.00012	
Molybdenum	mg/L	06/03/2009	N001	37.3	-	61,8	0.0029	FQ	#	0.00007	
Oxidation Reduction Potential	mV	06/03/2009	N001	37.3	-	61.8	90.5	FQ	#		
рН	s.u.	06/03/2009	N001	37.3	-	61.8	8.36	FQ	#		
Specific Conductance	umhos /cm	06/03/2009	N001	37.3	-	61.8	1175	FQ	#		
Sulfate	mg/L	06/03/2009	N001	37.3	-	61.8	420	FQ	#	5	• .
Temperature	C	06/03/2009	N001	37.3 <sup>**</sup>	•	61.8	10.16	FQ	ŧ		
Turbidity	NTU	06/03/2009	N001	37.3	-	61.8	3.82	FQ	#		
Uranium	mg/L	06/03/2009	N001	37.3	-	61.8	0.00024	FQ	#	0.0000045	

.

.

#### Groundwater Quality Data by Location (USEE100) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009 Location: 0707 WELL

Sample Depth Range Qualifiers Detection Uncertainty Parameter Units Result (Ft BLS) Date ID. Lab Data QA Limit F # 06/03/2009 N001 9.1 23.3 0.95 Manganese mg/L 0.00012 -Molybdenum 06/03/2009 N001 9.1 23.3 0.59 F # mg/L -0.0014 Oxidation Reduction 06/03/2009 N001 23.3 F # m٧ 9.1 108.7 -Potential рН 06/03/2009 N001 9.1 23.3 7.06 F # s.u. umhos 06/03/2009 Specific Conductance N001 9.1 23.3 3469 F # -/cm Sulfate 06/03/2009 N001 9.1 23.3 1800 F . # mg/L 25 Temperature С 06/03/2009 N001 23.3 F # 9.1 9.38 -Turbidity NTU 06/03/2009 N001 9.1 23.3 F # 2.99 ÷ Uranium mg/L 06/03/2009 N001 9.1 23.3 0.74 F # 0.00009 -

# Groundwater Quality Data by Location (USEE100) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009 Location: 0710 WELL

1

Parameter	Units	San Date	nple ID		oth Ra Ft BLS		Résult	Qualifiers Lab Data	QA	Detection Limit	Uncertainty
Manganese	mg/L	06/02/2009	N001	9.8	-	26.8	0.029	F	#	0.00012	
Molybdenum	mg/L	06/02/2009	N001	9.8	-	26.8	0.0017	F	#	0.00007	
Oxidation Reduction Potential	mV	06/02/2009	N001	9.8	· -	26.8	152.9	F	#		
рН	s.u.	06/02/2009	N001	9.8	-	26.8	7.6	F	#		
Specific Conductance	umhos /cm	06/02/2009	N001	9.8	-	26.8	677	F	#		
Sulfate	mg/L	06/02/2009	N001	9.8	-	26.8	130	F	#	5	
Temperature	С	06/02/2009	N001	9.8	-	26.8	7.35	F	#		· · · ·
Turbidity	NTU	06/02/2009	N001	9.8	-	26.8	6.77	 F	# .	-	•
Uranium	mg/L	06/02/2009	N001	9.8		26.8	0.0051	F	#	0.0000045	· · · · · · · · · · · · · · · · · · ·

# Groundwater Quality Data by Location (USEE100) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009 Location: 0716 WELL

Parameter	Units	Samp Date	le ID		th Ra t BL	ange S)	Result		ilifiers ata	QA	Detection Limit	Uncertainty
Manganese	mg/L	06/02/2009	N001	9.78		14.78	0.34		F	#	0.00012	· ·
Manganese	mg/L	06/02/2009	N002	9.78	-	14.78	0.36	· · ·	F	#	0.00012	
Molybdenum	mg/L	06/02/2009	N001	9.78	-	14.78	0.17		F	#	0.00035	
Molybdenum	mg/L	06/02/2009	N002	9.78	-	14.78	0.16		F	#	0.00035	
Oxidation Reduction Potential	mV	06/02/2009	N001	9,78	-	14.78	45		F	#	•	
pH ·	s.u.	06/02/2009	N001	9.78	-	14.78	7.34	· .	F	#	•	
Specific Conductance	umhos /cm	06/02/2009	N001	9.78	-	14.78	1116		F	#		
Sulfate	mg/L	06/02/2009	N001	9:78	-	14.78	290		F	#	5	• •
Sulfate	mg/L	06/02/2009	N002	9.78	-	14.78	300		F	#	5	:
Temperature	Ċ	06/02/2009	N001	9.78	-	14.78	8.74	·	F	#		÷
Turbidity	NTU	06/02/2009	N001	9.78	-	14.78	8.73		F.	#		
Uranium	mg/L	06/02/2009	N001	9.78	-	14.78	0.19		F.	#	0.000022	
Uranium	mg/L	06/02/2009	N002	9.78	· -	14.78	0.19		F ·	# ·	0.000022	

Page 44

c

1

#### Groundwater Quality Data by Location (USEE100) FOR SITE RVT01, Riverton Processing Site **REPORT DATE: 8/3/2009** Location: 0717 WELL

Depth Range Sample Qualifiers Detection Parameter Units Result Date ID 👘 (Ft BLS) Lab QA mg/L 06/02/2009 N001 45.1 0.26 Manganese 55.1 F # -Molybdenum 06/02/2009 N001 45.1 55.1 0.0083 F mg/L # -**Oxidation Reduction** 06/02/2009 N001 45.1 55.1 44.1 F # mV ۲ Potential рΗ 06/02/2009 N001 45.1 55.1 7.77 F s.u. # umhos Specific Conductance 06/02/2009 N001 45.1 -55.1 1877 F # /cm Sulfate 06/02/2009 45.1 mg/L N001 -55.1 700 F # С 06/02/2009 N001 45.1 9.41 F # Temperature -55.1 Turbidity NTU 06/02/2009 N001 45.1 55.1 6.22 F # . 45.1 -N001 Uranium mg/L 06/02/2009 55.1 0.00018 F # 0.0000045

Uncertainty

Limit

0.00012

0.00007

10

# Groundwater Quality Data by Location (USEE100) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009 Location: 0718 WELL

<u>.</u>]

Manganese	mg/L	06/04/2009	. N001	18.24		23.24	0.37			F	#	0.00012	
Molybdenum	mg/L	06/04/2009	N001	18.24	-	23.24	0.073			F	#	0.00035	
Oxidation Reduction Potential	mV	06/04/2009	N001	18.24	-	23.24	186.5			F	#		
рН	s.u.	06/04/2009	N001	18.24	-	23.24	7.21			F·	· #``		
Specific Conductance	umhos /cm	06/04/2009	N001	18.24	-	23.24	3443			F	#	~	 
Sulfate	mg/L	06/04/2009	N001	18.24	-	23.24	1500	. *	· .	F	#	25	
Temperature	С	06/04/2009	N001	18.24	-	23.24	9.51		•	F	#		 •
Turbidity	NTU	06/04/2009	N001	18.24	-	23.24	3.72			F	#	·	
Uranium	mg/L	06/04/2009	N001	18.24	-	23.24	0.19			F	#	0.000045	

Page 46

### Groundwater Quality Data by Location (USEE100) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009

Location: 0719 WELL

7

•													
Parameter	Units	Sam Date	ple ID		th Ra Tt BL	ange S)	Result		Lab	Qualifiers Data	QA	Detection	Uncertainty
Manganese	mg/L	06/04/2009	N001	38.47	· _	48.47	0.0022	• • •	В	UFQ	· #	0.00012	
Molybdenum	mg/L_	06/04/2009	N001	38.47	•'	48.47	0.015			FQ	#	0.00007	
Oxidation Reduction Potential	· mV	06/04/2009	N001	38.47	-	48.47	158.3			FQ	#		
рН	s.u.	06/04/2009	N001	38.47		48.47	7.73	. •		FQ	#		
Specific Conductance	umhos /cm	06/04/2009	N001	38.47	-	48.47	1165			FQ	#		
Sulfate	mg/L	06/04/2009	N001	38.47	-	48.47	430			FQ	#	5	
Temperature	С	06/04/2009	N001	38.47	-	48.47	11.99			FQ	#		· · · · · · · · · · · · · · · · · · ·
Turbidity	NTU	06/04/2009	N001	38.47	-	48.47	5.39			FQ	#		~
Uranium	mg/L	06/04/2009	N001	38.47	-	48.47	0.0007			FQ	#	0.0000045	

Groundwater Quality Data by Location (USEE100) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009 Location: 0720 WELL

Parameter	Units	Sam Date	ple ID		th Ra t BL	inge S)	Result		Lab	Qualifiers Data	QA	Detection Limit	Uncertainty
Manganese	mg/L	06/03/2009	N001	7.94	-	12.94	0.0067			F	#	0.00012	
Molybdenum	mg/L	06/03/2009	N001	7.94	-	12.94	0.0012			UF	#	0.00007	
Oxidation Reduction Potential	mV	06/03/2009	N001	7.94	-	12.94	36.6			F	#		
рН	s.u.	06/03/2009	N001	7.94	Ŧ	12.94	7.32		•	F	#		
Specific Conductance	umhos /cm	06/03/2009	N001	7.94	-	12.94	808			F	# .		
Sulfate	mg/L	06/03/2009	N001	7.94	-	12.94	180			F	#	5	
Temperature	С	06/03/2009	N001	. 7.94	-	12.94	8.48		•.	F	#		
Turbidity	NTU	06/03/2009	N001	7.94	-	12.94	9.23	-	:	F	#		
Uranium	mg/L	06/03/2009	N001	7.94	-	12.94	0.0062			F .	#	0.0000045	·····

Page 48

.

# Groundwater Quality Data by Location (USEE100) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009 Location: 0721 WELL

Parameter	∵Units	Sam Date	ple ID		th Ra t BL	ange S)		Result		Lab	Qualifiers Data	QA	Detection Limit	Uncer	tainty
Manganese	mg/L	06/03/2009	N001	44.43	-	54.43		0.0045		B	F	<b>#</b> .	0.00012		
Molybdenum	mg/L	06/03/2009	N001	44.43	- '	54.43		0.0027			F	#	0.00007		
Oxidation Reduction Potential	mV	06/03/2009	N001	44.43	-	54.43		-8	· · ·		F	. #	· · · · · · · · · · · · · · · · · · ·		
рН	s.u.	06/03/2009	N001	44.43	-	54.43	1. j.	8.94			F	#			
Specific Conductance	umhos /cm	06/03/2009	N001	44.43	-	54.43		862			F	#			
Sulfate	mg/L	06/03/2009	N001	44.43	· . <del>-</del>	54.43		270	-		F	#	5		
Temperature	с	06/03/2009	N001	44.43	-	54.43		10.47			F	#			
Turbidity	NTU	06/03/2009	N001	44.43		54.43		4.27			F	#			
Uranium	mg/L	06/03/2009	N001	44.43	-	54.43	0	.000097		в	UF	#	0.0000045		

- A.

## Groundwater Quality Data by Location (USEE100) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009 Location: 0722R WELL Replacement well for destroyed well 0722.

Parameter	Ünits	Sam Date	ple ID		oth Ra Ft BLS	ange S)	Result	Lab	Qualifiers Data	QA	Detection Limit	Uncertainty
Manganese	mg/L	06/03/2009	N001	11.1	-	16.1	0.0031	В	F	# .	0.00012	
Molybdenum	mg/L	06/03/2009	N001	11.1	-	16.1	0.065		F	#	0.00014	• •
Oxidation Reduction Potential	mV	06/03/2009	N001	11.1	-	16.1	22.6	· .	F	#		
рН	s.u.	06/03/2009	N001	11.1	-	16.1	6.98		F	. #	5 9 _ 4 	
Specific Conductance	umhos /cm	06/03/2009	N001	. 11.1	-	16.1	1874		F	#		
Sulfate	mg/L	06/03/2009	N001	11.1	-	16.1	870	,	F	#	10	
Temperature	С	06/03/2009	N001	11.1	-	16.1	9.84		F	#		
Turbidity	NTU	06/03/2009	N001	11.1	-	16.1	3.16		F	#	· · · · · · · · · · · · · · · · · · ·	
Uranium	mg/L	06/03/2009	N001	11.1	-	16.1	0.7		F	#	0.00009	

Page 50

Groundwater Quality Data by Location (USEE100) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009 Location: 0723 WELL

Parameter	Units	Sam Date	ple ID		th R t BL	ange S)	Result		Qualifier ab		Detection Limit	Uncertainty
Manganese	mg/L	06/03/2009	N001	45.99	-	55.99	0.57		F	#	0.00012	
Molybdenum	mg/L	06/03/2009	N001	45.99	-	55.99	0.00038	E	UF	#	0.00007	
Oxidation Reduction Potential	mV	06/03/2009	N001	45.99	-	55.99	-6.4		F	#		
рН	s.u.	06/03/2009	N001	45.99	-	55.99	7.11		F	#		
Specific Conductance	umhos /cm	06/03/2009	N001	45.99	-	55.99	3900		F	#		
Sulfate	mg/L	06/03/2009	N001	45.99	-	55.99	1900		F	#	25	
Temperature	С	06/03/2009	N001	45.99		55.99	11.08		. F	#	······································	· · ·
Turbidity	NTU	06/03/2009	N001	45.99	-	55.99	6.11		F	#		
Uranium	mg/L	06/03/2009	N001	45.99		55.99	0.000053	. E	UF	#	0.0000045	· ~

4.

## Groundwater Quality Data by Location (USEE100) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009 Location: 0729 WELL

Parameter	Units	San Date	nple ID		th R T BL	ange S)	Result	Lab	Qualifiers Data	QA	Detection Limit	Uncertainty
Manganese	mg/L	06/03/2009	N001	14.71	•	19.71	0.0039	· B	F	#	0.00012	
Molybdenum	mg/L	06/03/2009	N001	14.71	-	19.71	0.0031		F	· #	0.00007	
Oxidation Reduction Potential	mV	06/03/2009	N001	14.71	-	19.71	49.2		F	#		
рН	S.U. <sup>,</sup>	06/03/2009	N001	14.71	-	19.71	7.29		F	#		,
Specific Conductance	umhos /cm	06/03/2009	N001	14.71	•	19.71	840	· .	F	#		
Sulfate	mg/L	06/03/2009	N001	14.71	-	19.71	120	· •	F	#	5	
Temperature	Ċ	06/03/2009	N001	14.71	•-	19.71	8.96		F	#	······································	· .
Turbidity	NTU	06/03/2009	N001	14.71	-	19.71	4.11		F	#		· · · · · · · · · · · · · · · · · · ·
Uranium	mg/L	06/03/2009	N001	14.71	•	19.71	0.014		F	. #	0.0000045	· · · · · ·

Page 52

[]

# Groundwater Quality Data by Location (USEE100) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009 Location: 0730 WELL

1

Parameter	Units	Sam Date	ple ID		th Ra T BL	ange S)	Result	Qualifiers Lab Data	QA	Detection Limit	Uncertain
Manganese	mg/L	06/03/2009	N001	38.62	-	48.62	0.1	F	#	0.00012	
Molybdenum	mg/L	06/03/2009	N001	38.62	-	48.62	0.0048	F	#	0.00007	
Oxidation Reduction Potential	mV	06/03/2009	N001	38.62	-	48.62	16.8	F	#		
рН	s.u.	06/03/2009	N001	38.62	-	48.62	7.55	F	#		
Specific Conductance	umhos /cm	06/03/2009	N001	38.62	-	48.62	953	. F	#		
Sulfate	mg/L	06/03/2009	N001	38.62	-	48.62	170	, F	#	5	
Temperature	С	06/03/2009	N001	38.62	-	48.62	10.5	F	#	· · ·	
Turbidity	NTU	06/03/2009	N001	38.62	-	48.62	9.72	. F	#		
Uranium	mg/L	06/03/2009	N001	38.62	-	48.62	0.0095	F	#	0.0000045	

Ĩ

## Groundwater Quality Data by Location (USEE100) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009 Location: 0784 WELL

.

Parameter	Units	Sam Date	ple ID	Deptl (Ft	n Rar BLS		Result	Lab	Qualifiers Data	QA	Detection	Uncertainty
Manganese	mg/L	06/02/2009	N001	1.65	-	6.65	0.26		F	<b>'#</b>	0.00012	•
Molybdenum	mg/L	06/02/2009	N001	1.65	-	6.65	0.015		F	#	0.00007	· · ·
Oxidation Reduction Potential	mV	06/02/2009	N001	1.65	-	6.65	-30.6		, F	#		
рН	s.u.	06/02/2009	N001	1.65	-	6.65	8.09		F	. #		
Specific Conductance	umhos /cm	06/02/2009	N001	1.65	-	6.65	5034		F	#		
Sulfate	mg/L	06/02/2009	N001	1.65	•	6.65	2500		F	#	25	
Temperature	С	06/02/2009	N001	1.65	-	6.65	11.31		F	#	······································	· · · · · · · · · · · · · · · · · · ·
Turbidity	NTU	06/02/2009	N001	1.65	-	6.65	4.58	· .	F	#		· ·
Uranium	mg/L	06/02/2009	N001	1.65	-	6.65	0.0027		F.	#	0.0000045	· · ·

Page 54

# Groundwater Quality Data by Location (USEE100) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009 Location: 0788 WELL

Páraméter	Units	Sam Date	ple ID		th Ra t BL	ange S)	Result	Lab	Qualifiers Data	QA	Detection Limit	Uncertainty
Manganese	mg/L	06/03/2009	N001	1.41	-	13.41	0.029		F	#	0.00012	
Molybdenum	mg/L	06/03/2009	N001	1.41	-	13.41	0.023		F	#	0.00007	•.
Oxidation Reduction Potential	mV	06/03/2009	N001	1.41	-	13.41	102.8		F	#	· •	
pH	s.u.	06/03/2009	N001	1.41	-	13.41	7.4		· F	.#		
Specific Conductance	umhos /cm	06/03/2009	N001	1.41	-	13.41	1901		F	#		
Sulfate	mg/L	06/03/2009	N001	1.41	-	13.41	660		F.	#	10	
Temperature	С	06/03/2009	N001	1.41	-	13.41	9.72	•	F	#		
Turbidity	NTU	06/03/2009	N001	1.41	-	13.41	3.12	•	F	#		
Uranium	mg/L	06/03/2009	N001	1.41	-	13.41	0.033		7	#	0.0000045	

 $\overline{(}$ 

Groundwater Quality Data by Location (USEE100) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009 Location: 0789 WELL

Parameter	Units	Sam Date	ple ID	Depti (Ft	h Rar I BLS		Result	( Lab	Qualifiers Data	QA	Detection Limit	Uncertainty
Manganese	mg/L	06/03/2009	N001	6.2	-	18.2	0.033		F	, # <sub>.</sub>	0:00012	
Manganese	mg/L	06/03/2009	N002	6.2	-	18.2	0.031	÷	۰ F	# ·	0.00012	· · ·
Molybdenum	mg/L	06/03/2009	N001	6.2	-	18.2	0.36		F	#	0.0014	
Molybdenum	· mg/L	06/03/2009	N002	6.2	-	18.2	0.34		F	#	0.0014	
Oxidation Reduction Potential	mV	06/03/2009	N001	6.2	-	18.2	. 143.8		F .	#	······································	······································
рН	s.u.	06/03/2009	N001	6.2	-	18.2	7.37		F	. # ,		
Specific Conductance	umhos /cm	06/03/2009	N001	6.2	-	18.2	7981		F	#	,	······································
Sulfate	mg/L	06/03/2009	N001	6.2	-	18.2	4500		F	#	50	
Sulfate	mg/L	06/03/2009	N002	6.2.	-	18.2	4700		F	#	50	
Temperature	C	06/03/2009	N001	6.2	-	18.2	10.26		F	#		· · ·
Turbidity	NTU	06/03/2009	N001	6.2	· -	18.2	2.08		F	#		
Uranium	mg/L	06/03/2009	N001	6.2	-	18.2	2.1		F .	#	0.00009	
Uranium	. mg/L	06/03/2009	N002	6.2	· _ · `	18.2	2.1		F.	#	0.00009	

Page 56

7

Ŧ.

#### Groundwater Quality Data by Location (USEE100) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009 Location: 0809 WELL

Sample Depth Range Qualifiers Detection Parameter Units Result Uncertainty Date (Ft BLS) ID Data QA Limit Lab Manganese mg/L 06/03/2009 N001 10.5 -19.4 0.8 F # 0.00012 10.5 19.4 0.0024 F Molybdenum mg/L-06/03/2009 N001 # 0.00007 -**Oxidation Reduction** F mV 06/03/2009 N001 10.5 19.4 28.4 -# Potential F 06/03/2009 N001 10.5 · -19.4 pН s.u. 7.77 # umhos Specific Conductance 06/03/2009 N001 10.5 - 1 19.4 697 F # /cm Sulfate 06/03/2009 N001 10.5 - 19.4 270 F # mg/L 5 С 06/03/2009 N001 10.5 19.4 11.38 F # Temperature -NTU 06/03/2009 10.5 19.4 0.72 F Turbidity N001 # -19.4 0.001 F Uranium mg/L 06/03/2009 N001 10.5 # 0.0000045 -

### Groundwater Quality Data by Location (USEE100) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009 Location: 0824 WELL

Manganese	mg/L	06/04/2009	N001	9.5	÷	14.5	0.0021	 В	F	, #	0.00012	
Molybdenum	mg/L	06/04/2009	N001	9.5	-	14.5	0.0037		F.	#	0.00007	
Oxidation Reduction Potential	mV	06/04/2009	N001	9.5	-	14.5	183	 	۴·	#		
pH	. s.u.	06/04/2009	N001	9.5		14.5	7.35		F	#		
Specific Conductance	umhos /cm	06/04/2009	N001	9.5	-	14.5	910		F	#	· · ·	
Sulfate	mg/L	06/04/2009	N001	9.5		14.5	160		F	#	5	-
Temperature	С	06/04/2009	N001	9.5	-	14.5	8.45		F	#		
Turbidity	NTU	06/04/2009	N001	9.5	-	14.5	1.17		F,	#		· .
Uranium	mg/L	06/04/2009	N001	9.5	-	14.5	0.02		F	. #	0.0000045	

Page 58

[

1

### Groundwater Quality Data by Location (USEE100) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009 Location: 0826 WELL

2

Parameter	Units	Samj Date	ple ID		oth Ra Ft BL		Result	Qualifiers Lab Data	QA	Detection Limit Uncerta	ainty
Manganese	mg/L	06/03/2009	N001	6.6	-	11.6	0.57	F	#	0.00012	
Molybdenum	mg/L	06/03/2009	N001	6.6	· <u>-</u>	11.6	0.021	F	#	0.00007	
Oxidation Reduction Potential	mV	06/03/2009	N001	6.6	-	.11.6	27.6	· F	#		
рН	s.u.	06/03/2009	N001	6.6	-	11.6	7.39	F	#		
Specific Conductance	umhos /cm	06/03/2009	N001	6.6	-	11.6	1516	F	#		
Sulfate	mg/L	06/03/2009	N001	6.6	-	11.6	460	F	#	10	
Temperature	С	06/03/2009	N001	6.6	-	11.6	9.08	F	#		
Turbidity	NTU	06/03/2009	N001	6.6	-	11.6	1.83	F	#		
Uranium	mg/L	06/03/2009	N001	6.6	-	11.6	0.036	F	#	0.0000045	

D

[]

### Groundwater Quality Data by Location (USEE100) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009 Location: 0828 WELL

Parameter	Units	Sam Date	ple ID	Depth Range (Ft BLS)	Result		ifiers ata QA	Detection Limit	Uncertainty
Manganese	mg/L	06/02/2009	N001		0.0031	В	#	0.00012	
Molybdenum	mg/L	06/02/2009	N001	-	0:0031		# `	0.00007	
Oxidation Reduction Potential	mV	06/02/2009	N001		229.7		#		· · ·
рН	s.u.	06/02/2009	N001	. <b>-</b>	8.84	· · ·	#		
Specific Conductance	umhos /cm	06/02/2009	N001		737	-	#		
Sulfate	mg/L	06/02/2009	N001		190	,	#	5	
Temperature	Ċ	06/02/2009	N001	-	13.58		#		
Turbidity	NTU	06/02/2009	N001	-	3.25	· · ·	#	-	
Uranium	mg/L	06/02/2009	N001	·	0.00016		# ·	0.0000045	5. 5

Page 60

. 1

, and a second s

#### Groundwater Quality Data by Location (USEE100) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009 Location: 0836 WELL

Parameter	Units	Sam Date	ID .	Depth Range (Ft BLS)	Result	Lab	Dualifiers Data QA	Detection Limit	Uncertainty
Manganese	mg/L	06/02/2009	N001	-	0.0059		• #	0.00012	
Molybdenum	mg/L	06/02/2009	N001	-	0.0024		#	0.00007	
Oxidation Reduction Potential	mV	06/02/2009	N001	-	112		#		······································
рН	s.u.	06/02/2009	N001	-	9.55		#		
Specific Conductance	umhos /cm	06/02/2009	N001	• •	785	· · ·	. #		
Sulfate	mg/L	06/02/2009	N001	-	200		#	5	
Temperature	С	06/02/2009	N001	•	9.32	· · · · · · · · · · · · · · · · · · ·	#		
Turbidity	NTU	06/02/2009	N001		20.7	<u>, , , , , , , , , , , , , , , , , , , </u>	#	· · · · · · · · · · · · · · · · · · ·	····
Uranium	mg/L	06/02/2009	N001	-	0.00003	В	U #	0.0000045	· .

SAMPLE ID CODES: 000X = Filtered sample (0.45 µm). N00X = Unfiltered sample. X = replicate number.

#### LAB QUALIFIERS:

\* Replicate analysis not within control limits.

- Result above upper detection limit.
- TIC is a suspected aldol-condensation product. А
- Inorganic: Result is between the IDL and CRDL. Organic: Analyte also found in method blank. в
- С Pesticide result confirmed by GC-MS.
- Analyte determined in diluted sample. D
- Inorganic: Estimate value because of interference, see case narrative. Organic: Analyte exceeded calibration range of the GC-MS. Е
- н Holding time expired, value suspect.

I Increased detection limit due to required dilution.

JEstimated

Inorganic or radiochemical: Spike sample recovery not within control limits. Organic: Tentatively identified compound (TIC). Ν

> 25% difference in detected pesticide or Aroclor concentrations between 2 columns. Р

U Analytical result below detection limit.

W Post-digestion spike outside control limits while sample absorbance < 50% of analytical spike absorbance.

Laboratory defined qualifier, see case narrative. X,Y,Z

#### DATA QUALIFIERS:

- Low flow sampling method used. G Possible grout contamination, pH > 9. F J Estimated value. LLess than 3 bore volumes purged prior to sampling. Q Qualitative result due to sampling technique. R Unusable result. X Location is undefined.
- Parameter analyzed for but was not detected. U

#### QA QUALIFIER:

# Validated according to quality assurance guidelines.

### This page intentionally left blank

1.11

### Surface Water Quality Data

÷. .

<u>f"""</u>

### This page intentionally left blank

Ϊ.,

Surface Water Quality Data by Location (USEE102) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009

Location: 0747 SURFACE LOCATION 8/26/97 State plane east changed from 594497.14 to an estimation close to river

Parameter	Units	Samp Date	le ID	Result	Qualifiers Lab Data	14 14 14 15 17 11	Detection Limit	Uncertainty
Manganese	mg/L	06/03/2009	0001	0.077	· ·	#	0.00012	
Molybdenum	mg/L	06/03/2009	0001	0.001	U	#	0.00007	
Oxidation Reduction Potential	mV	06/03/2009	N001	89.2		#		
рН	s.u.	06/03/2009	N001	8.06	2	#	,	
Specific Conductance	umhos/cm	06/03/2009	N001	275		#		
Sulfate	mg/L	06/03/2009	0001	50		#	0.5	
Temperature	С	06/03/2009	N001	14.48	·	#		
Turbidity	NTU	06/03/2009	N001	112		#	· · · · · · · · ·	
Uranium	mg/L	06/03/2009	0001	0.004		#	0.0000045	
· · · · · · · · · · · · · · · · · · ·		· · · · · ·						

## Surface Water Quality Data by Location (USEE102) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009 Location: 0749 SURFACE LOCATION 8/26/97 State plane east changed from 589532.71 to an estimation close to river

Parameter	Units	Samr Date	ole ID	Result	요즘 사람을 다 있는 것같이 가슴	alifiers Data QA	Detection Limit	Uncertainty
Manganese	mg/L	06/02/2009	0001	0.064		#	0.00012	
Molybdenum	mg/L	06/02/2009	0001	0.0089		#	0.00007	-
Oxidation Reduction Potential	mV	06/02/2009	N001	111.3	·	· #		· · · · · · · · · · · · · · · · · · ·
рН	s.u.	06/02/2009	· N001	7.42		: #		
Specific Conductance	umhos/cm	06/02/2009	N001	3258		#	·	
Sulfate	mg/L	06/02/2009	0001	1800		#	25	
Temperature	· C	06/02/2009	N001	18.91		#		
Turbidity	NTU	06/02/2009	N001	13.7		#		
Uranium	mg/L	06/02/2009	0001	0.0012	•	#	0.0000045	

Page 66

[ ]

## Surface Water Quality Data by Location (USEE102) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009 Location: 0794 SURFACE LOCATION 8/26/97 State plane north changed from 844178.27 to an estimation close to river

Parameter	Units	Sámp Date	le ID	Result	( Lab	Qualifiers	QA	Detection Limit	Uncertainty
Manganese	mg/L	06/02/2009	0001	0.0097			#	0.00012	
Molybdenum	mg/L	06/02/2009	0001	0.00079	В	U	#	0.00007	
Oxidation Reduction Potential	mV	06/02/2009	N001	186	£1-		#		
рН	s.u.	06/02/2009	N001	8.18			#		
Specific Conductance	umhos/cm	06/02/2009	N001	209			#		
Sulfate	mg/L	06/02/2009	0001	38			#	0.5	
Temperature	C	06/02/2009	N001	10.13			#		
Turbidity	NTU	06/02/2009	N001	68		1	#		
Uranium	mg/L	06/02/2009	0001	0.0011		•	#	0.0000045	

#### Surface Water Quality Data by Location (USEE102) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009 Location: 0796 SURFACE LOCATION Was possibly historically sampled ~900 ft E from current location

Sample Qualifiers Detection Parameter Result Units Uncertainty Limit Date ID Lab Data QA 06/02/2009 0001 Manganese mg/L 0.0082 # 0.00012 0001 B U Molybdenum mg/L 06/02/2009 0.00061 # 0.00007 **Oxidation Reduction** 06/02/2009 N001 m٧ 152.2 # Potential pН s.u. 06/02/2009 N001 8.89 # Specific Conductance umhos/cm 06/02/2009 N001 190 # Sulfate mg/L 06/02/2009 0001 39 # 0.5 • . Temperature С 06/02/2009 N001 9.94 # Turbidity NTU 06/02/2009 N001 77.8 í# Uranium mg/L 06/02/2009 0001 0.0000045 0.00084 #

Page 68

### Surface Water Quality Data by Location (USEE102) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009 Location: 0810 SURFACE LOCATION Gravel Pit Pond

Parameter	Units	Samp Date	le ID	Result	Qualiflers Lab Data	QA	Detection Limit	ncertainty
Manganese	mg/L	06/02/2009	N001	0.036		#	0.00012	
Molybdenum	mg/L	06/02/2009	N001	0.001	U	#	0.00007	
Oxidation Reduction Potential	mV	06/02/2009	N001	145.9		#		
рН	s.u.	06/02/2009	N001	9.5	· · · ·	· #		
Specific Conductance	umhos/cm	06/02/2009	N001	1090	ž	#		
Sulfate	mg/L	06/02/2009	N001	250		#	. 5	
Temperature	С	06/02/2009	N001	15.04		. #		
Turbidity	NTU	06/02/2009	N001	7.15		#		
Uranium	mg/L.	06/02/2009	N001	0.004		#	0.0000045	
	· · · · ·				· · ·			

Page 69

### Surface Water Quality Data by Location (USEE102) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009 Location: 0811 SURFACE LOCATION

Parameter	Units	Samı Date	ole ID	Result	( Lab	Qualifier Data	3 QA	Detection Limit	Uncertainty
Manganese	mg/L	06/03/2009	0001	0.0093			# <sup>`</sup>	0.00012	
Molybdenum	mg/L	06/03/2009	0001	0.00064	В	U	#	0.00007	
Oxidation Reduction Potential	mV	06/03/2009	N001	115.9		•	# ·	•	
рН	s.u.	06/03/2009	N001	8.45			#		
Specific Conductance	umhos/cm	06/03/2009	N001	280			#		· · ·
Sulfate	mg/L	06/03/2009	0001	75			#	0.5	
Temperature	С	06/03/2009	N001	12.96			#		
Turbidity	ŇTŬ	06/03/2009	N001	103			#		
Uranium	mg/L	06/03/2009	0001	0.0014			#	0.0000045	·····

Page 70

· · · ·

Surface Water Quality Data by Location (USEE102) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009 Location: 0812 SURFACE LOCATION

Parameter	Units	Samp Date	le ID	Result	( Lab	Qualifier: Data	QA	Detection Limit	inty
Manganese	mg/L	06/04/2009	0001	0.01			#	0.00012	
Molybdenum	mg/L	06/04/2009	0001	0.00062	В	Ų	#	0.00007	
Oxidation Reduction Potential	mV	06/04/2009	N001	116.1	· · ·		#		
pH .	s.u.	06/04/2009	N001	7.5			#	· .·	
Specific Conductance	umhos/cm	06/04/2009	N001	250			#		
Sulfate	mg/L	06/04/2009	0001	63			#	0.5	
Temperature	С	06/04/2009	N001	11.57			# .		
Turbidity	NTU	06/04/2009	N001	66.1			#		
Uranium	mg/L	06/04/2009	0001	0.0013		· ·	#	0.0000045	

 $\square$ 

1

. Page 71

# Surface Water Quality Data by Location (USEE102) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009 Location: 0822 SURFACE LOCATION west-side irrigation ditch

Parameter	Units	Samp Date	ile ID	Result	Lab	Qualifiers Data	QA.	Detection Limit	Uncertainty
Manganese	mg/L	06/03/2009	0001	0.019			#	0.00012	
Molybdenum	mg/L	06/03/2009	0001	0.0035			#	0.00007	<u> </u>
Oxidation Reduction Potential	mV	06/03/2009	N001	12.7			#		
рН	s.u.	06/03/2009	N001	8.37			· #		
Radium-226	pCi/L	06/03/2009	0001	0.18	U		#	0.18	0.134
Radium-228	pCi/L	06/03/2009	0001	0.63	U		#	0.63	0.394
Specific Conductance	umhos/cm	06/03/2009	N001	. 1780			#		-
Sulfate	mg/L	06/03/2009	0001	780			#	10	
Temperature	С	06/03/2009	N001	14.32			#	· ·	
Turbidity	NTU	06/03/2009	N001	15.1		•,	#		
Uranium	mg/L	06/03/2009	0001	0.005			#	0.0000045	

Page 72

# Surface Water Quality Data by Location (USEE102) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009

Location: 0823 SURFACE LOCATION

Parameter	Units	Samı Date	ole ID	Result		Qualifiers Data	QA	Detection Limit	Uncertainty
Manganese	mg/L	06/02/2009	N001	0.068			#	0.00012	
Molybdenum	mg/L	06/02/2009	N001	0.0024			#	0.00007	*
Oxidation Reduction Potential	mV	06/02/2009	N001	139.8			#		· · · · · · · · · · · · · · · · · · ·
рН	s.u.	06/02/2009	N001	9.38	_		#		
Specific Conductance	umhos/cm	06/02/2009	N001	- 1113			#		
Sulfate	mg/L	06/02/2009	N001	360			#	5	
Temperature	С	06/02/2009	N001	15.43	· · · .		#		
Turbidity	NTU	06/02/2009	N001	5.43			#		
Uranium	mg/L	06/02/2009	N001	0.0037			#	0.0000045	· · · ·

SAMPLE ID CODES: 000X = Filtered sample (0.45 µm). N00X = Unfiltered sample. X = replicate number.

#### LAB QUALIFIERS:

- \* Replicate analysis not within control limits.
- > Result above upper detection limit.
- A TIC is a suspected aldol-condensation product.
- B Inorganic: Result is between the IDL and CRDL. Organic: Analyte also found in method blank.
- C Pesticide result confirmed by GC-MS.
- D Analyte determined in diluted sample.
- E Inorganic: Estimate value because of interference, see case narrative. Organic: Analyte exceeded calibration range of the GC-MS.
- H Holding time expired, value suspect.
- 1 Increased detection limit due to required dilution.
- J Estimated

N Inorganic or radiochemical: Spike sample recovery not within control limits. Organic: Tentatively identified compound (TIC).

- P > 25% difference in detected pesticide or Aroclor concentrations between 2 columns.
- U Analytical result below detection limit.

W Post-digestion spike outside control limits while sample absorbance < 50% of analytical spike absorbance.

X,Y,Z Laboratory defined qualifier, see case narrative.

#### DATA QUALIFIERS:

F	Low flow sampling method used.	G	Possible grout contamination, pH > 9.	J	Estimated value.
L	Less than 3 bore volumes purged prior to sampling.	Q	Qualitative result due to sampling technique.	R	Unusable result.
U	Parameter analyzed for but was not detected.	. X	Location is undefined.		

#### QA QUALIFIER:

# Validated according to quality assurance guidelines.

Page 73

]

### This page intentionally left blank

.\_\_|

Page 74

# Equipment Blank Data

m

This page intentionally left blank

13.072

Ē.,

 $\mathcal{L}^{(s, \varphi), (p)}$ 

**BLANKS REPORT** LAB: PARAGON (Fort Collins, CO) RIN: 09052319 Report Date: 8/3/2009

Parameter	Site Code	Location	Sampl Date	e ID	Units	Result	Qua Lab	lifiers Data	Detection Limit	Uncertainty Sample Type
Manganese	RVT01	0999	06/03/2009	0001	mg/L	0.0011	В		0.00012	Ē
Molybdenum	RVT01	0999	06/03/2009	0001	mg/L	0.00033	В	. U	0.00007	. E
Sulfate	RVT01	0999	06/03/2009	0001	mg/L	0.5	U		0.5	. E
Uranium	RVT01	0999	06/03/2009	0001	mg/L	0.000029	В	U	0.0000045	E

SAMPLE ID CODES: 000X = Filtered sample (0.45 μm). N00X = Unfiltered sample. X = replicate number.

#### LAB QUALIFIERS:

\* Replicate analysis not within control limits.

Result above upper detection limit. >

TIC is a suspected aldol-condensation product. А

В Inorganic: Result is between the IDL and CRDL. Organic: Analyte also found in method blank.

Pesticide result confirmed by GC-MS. Analyte determined in diluted sample. С

D

Inorganic: Estimate value because of interference, see case narrative. Organic: Analyte exceeded calibration range of the GC-MS. Ε

Holding time expired, value suspect. н

I Increased detection limit due to required dilution.

JEstimated

Inorganic or radiochemical: Spike sample recovery not within control limits. Organic: Tentatively identified compound (TIC). Ν

> 25% difference in detected pesticide or Aroclor concentrations between 2 columns. Р

Analytical result below detection limit. U

Post-digestion spike outside control limits while sample absorbance < 50% of analytical spike absorbance. W

Laboratory defined qualifier, see case narrative. X,Y,Z

#### DATA QUALIFIERS:

F	Low flow sampling method used.		G Possible grout contamination, pH >	9.	J Estimated value.	
LLess th	nan 3 bore volumes purged prior to sampling.	Q	Qualitative result due to sampling technique.	R	Unusable result.	
U	Parameter analyzed for but was not detected.		X Location is undefined.			

SAMPLE TYPES:

E Equipment Blank.

(,, ., .)

### This page intentionally left blank

Page 78

# **Static Water Level Data**

Ē

[\*\*\*\*\*

### This page intentionally left blank

Ē,

£

# STATIC WATER LEVELS (USEE700) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009

Ē

L	ocation Code	Flow Code	Top of Casing Elevation (Ft)	Measure Date	ement Time	Depth From Top of Casing (Ft)	Water Elevation (Ft)	Water Level Flag
	0101	0	4946.58	06/02/2009	05:01:00	10.1	4936.48	
	0110	0	4944.35	06/02/2009	05:33:00	8.93	4935.42	
	0111	0	4946.87	06/02/2009	05:32:00	9	4937.87	
	0700	U	4951.38	06/01/2009	19:56:00	5.82	4945.56	
	0702	D ·	4931	06/03/2009	02:50:00	4.6	4926.4	
	0705	D	4930.8	06/03/2009	15:25:09	4.41	4926.39	
	0707	D	4931	06/03/2009	15:10:45	4.42	4926.58	
	0709	D	4930.7	06/02/2009	05:39:00	4.75	4925.95	
	0710	U	4947.9	06/02/2009	15:10:26	5.15	4942.75	
	0716	0	4939.12	06/02/2009	16:10:35	8.45	4930.67	
	0717	0	4938.8	06/02/2009	15:50:29	8.07	4930.73	· .
	0718	D.	4937.6	06/04/2009	10:00:05	7.45	4930.15	
	0719	D	4937.55	06/04/2009	10:45:52	7.06	4930.49	
	0720	С	4940.46	06/03/2009	10:20:30	4.74	4935.72	
	0721	С	4940.47	06/03/2009	10:40:34	7.1	4933.37	
	0722R		4937.06	06/03/2009	09:50:29	8.51	4928.55	- 10 vie des
	0723	D	4936.01	06/03/2009	09:30:53	7.31	4928.7	
	0724	U	4941.36	06/01/2009	22:24:00	6.87	4934.49	
	0725	U	4941.66	06/01/2009	22:21:00	7.1	4934.56	
	0726	U	4942	06/01/2009	22:08:00	5.82	4936.18	
	0727	υ	4951.69	06/02/2009	05:35:00	9.35	4942.34	
	0728	Ú ·	4946.01	06/02/2009	02:33:00	6.71	4939.3	
	0729	D	4932.75	06/03/2009	08:55:57	6.84	4925.91	
	0730	D	4933.08	06/03/2009	08:20:50	7.53	4925.55	
	0732	U	4945.07	06/02/2009	03:25:00	7.73	4937.34	
	0733	U	4946.76	06/01/2009	19:50:00	3.58	4943.18	
	0734	U	4946.08	06/01/2009	19:53:00	5.14	4940.94	
	0736	U	4946	06/01/2009	22:26:00	6.81	4939.19	
		• • • • • • • • • • • • • • • • • • • •						

## STATIC WATER LEVELS (USEE700) FOR SITE RVT01, Riverton Processing Site REPORT DATE: 8/3/2009

Location Code	Flow Code	Top of Casing Elevation (Ft)	Measure Date	ement Time	Depth From Top of Casing (Ft)	Water Elevation (Ft)	Water Level Flag
0784	U	4945.45	06/02/2009	17:20:38	6.35	4939.1	,
0788	С	4935.09	06/03/2009	15:55:32	7.49	4927.6	
0789	D	4933.66	06/03/2009	14:35:44	5.93	4927.73	
0809	_	4932.09	06/03/2009	17:15:18	4.34	4927.75	
0824		4928.27	06/04/2009	08:35:17	5.56	4922.71	· · ·
0826		4936.98	06/03/2009	12:00:44	6.72	4930.26	

FLOW CODES: B BACKGROUND N UNKNOWN C CROSS GRADIENT O ON SITE

DIENT D DOWN GRADIENT U UPGRADIENT

DIENT F OFF SITE

et co

 $\Gamma$   $\cap$ 


WATER LEVEL FLAGS: D Dry ..... F FLOWING

# **Time-Concentration Graphs**

### This page intentionally left blank


e n

Riverton Processing Site Semi-Confined Aquifer Locations Manganese Concentration

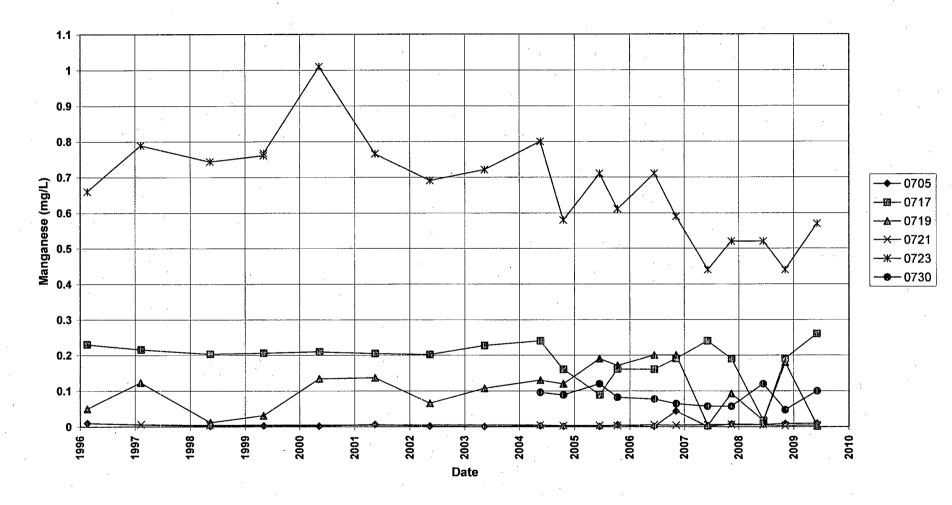

Page 85


Riverton Processing Site Surficial Aquifer Locations Manganese Concentration

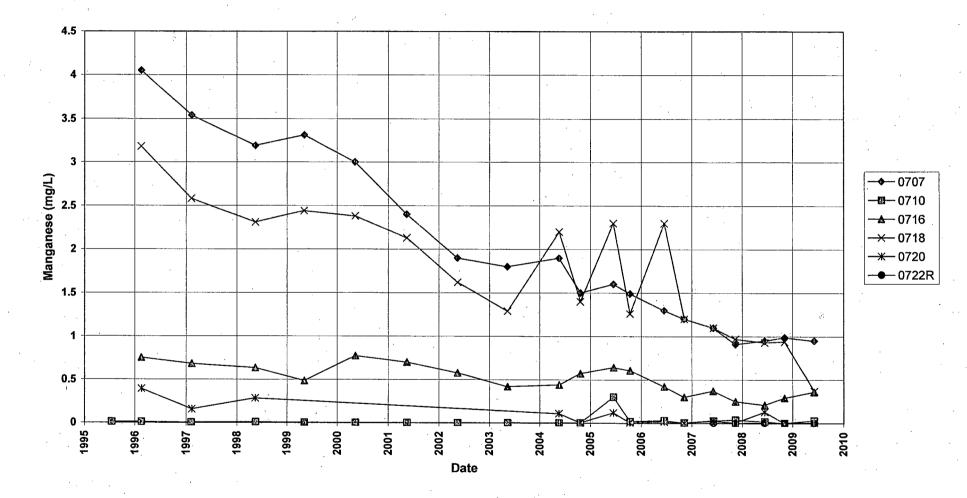

Page 86


. .



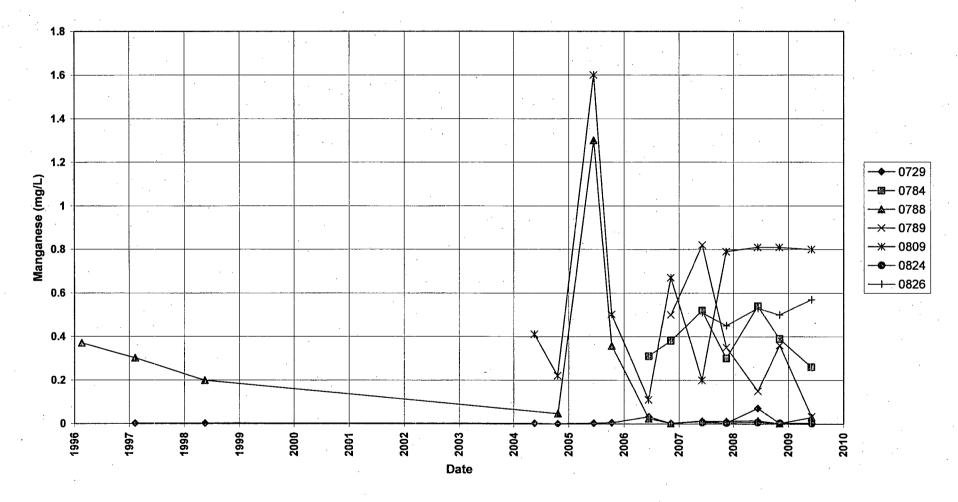

Page 87

Riverton Processing Site Semi-Confined Aquifer Locations Molybdenum Concentration Maximum Concentration Limit = 0.1 mg/L

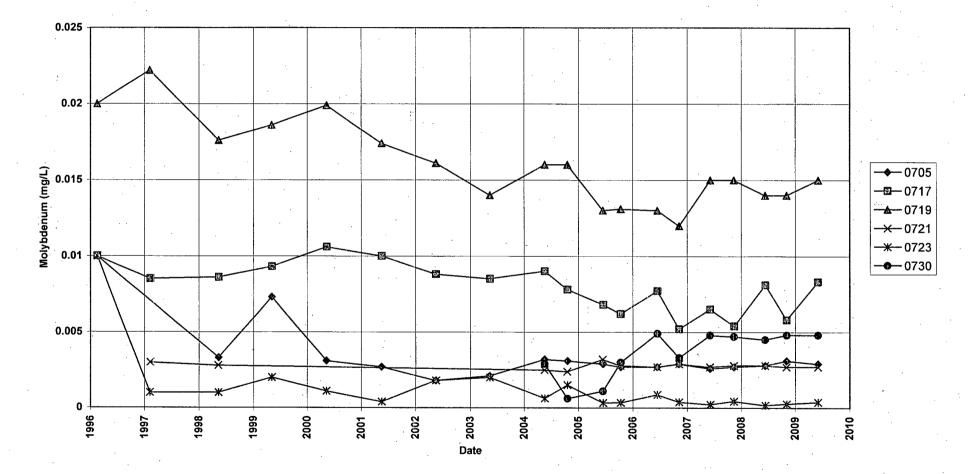


Page 88

1


Riverton Processing Site Surficial Aquifer Locations Molybdenum Concentration Maximum Concentration Limit = 0.1 mg/L 1

3

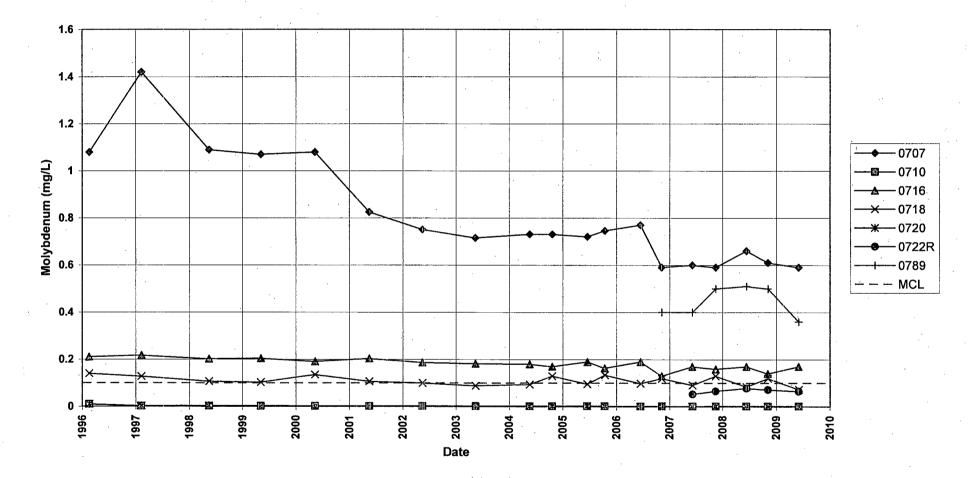


Page 89

Riverton Processing Site Surficial Aquifer Locations Molybdenum Concentration Maximum Concentration Limit = 0.1 mg/L

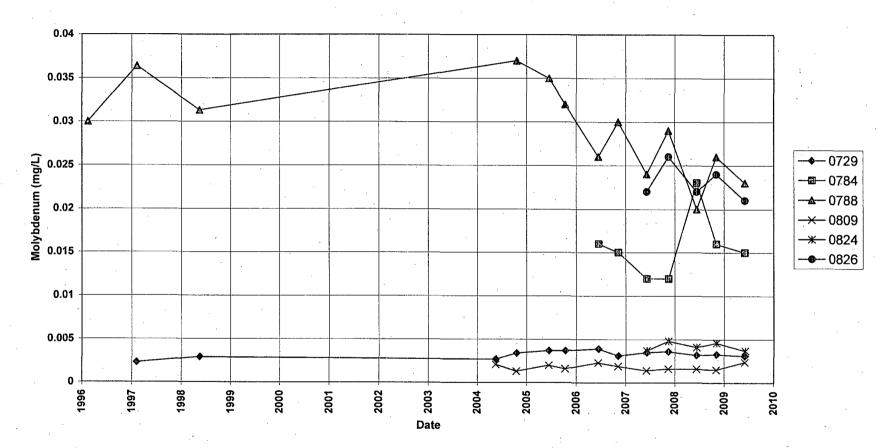


Page 90

Riverton Processing Site Semi-Confined Aquifer Locations Sulfate Concentration 1

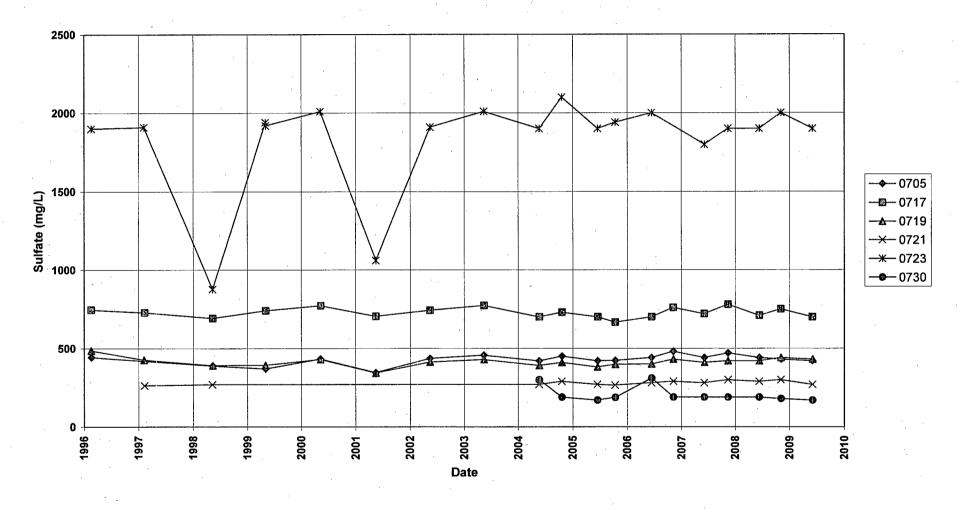

j

Riverton Processing Site Surficial Aquifer Locations Sulfate Concentration

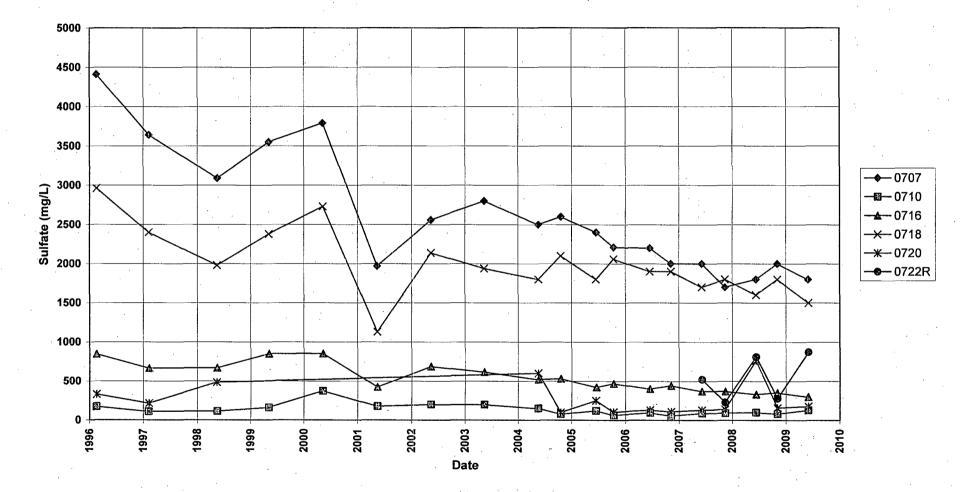


Page 92


Riverton Processing Site Surficial Aquifer Locations Sulfate Concentration

Ľ

ξĺ

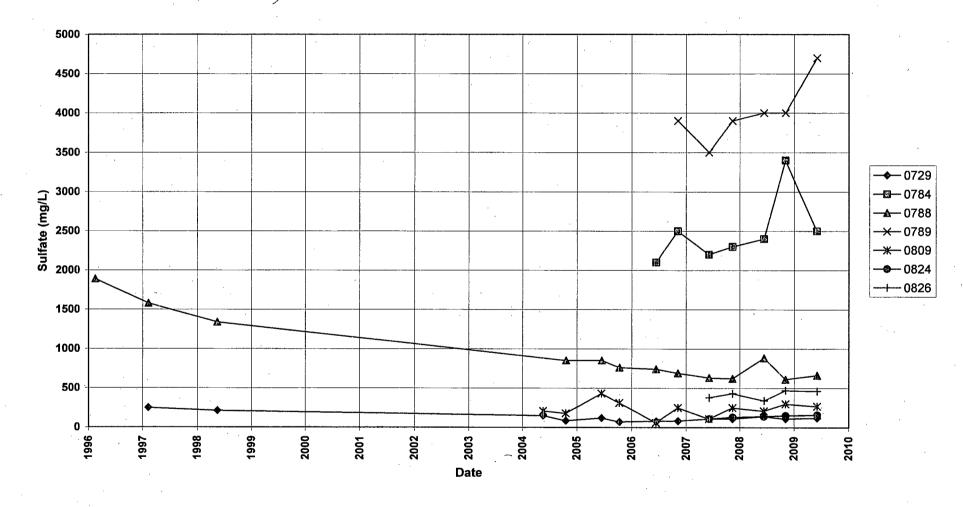

Riverton Processing Site Semi-Confined Aquifer Locations Uranium Concentration Maximum Concentration Limit = 0.044 mg/L

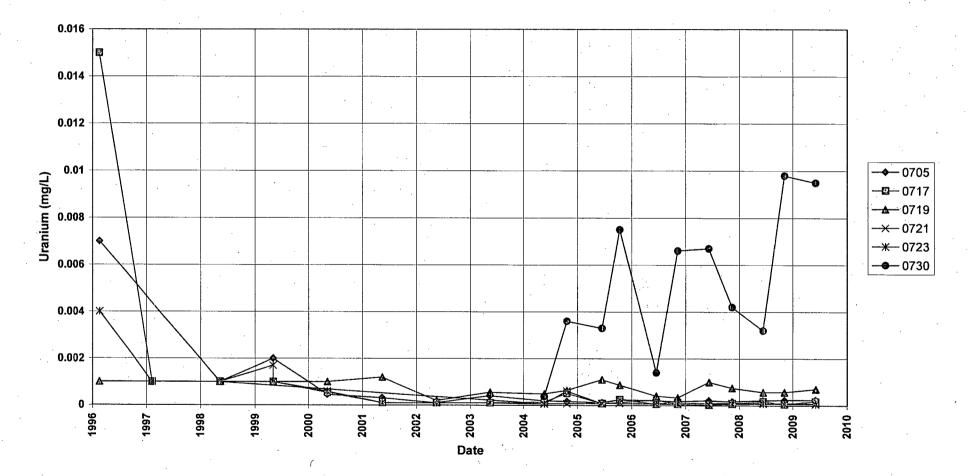


Page 94


1

 $\square$ 

Riverton Processing Site Surficial Aquifer Locations Uranium Concentration Maximum Concentration Limit = 0.044 mg/L

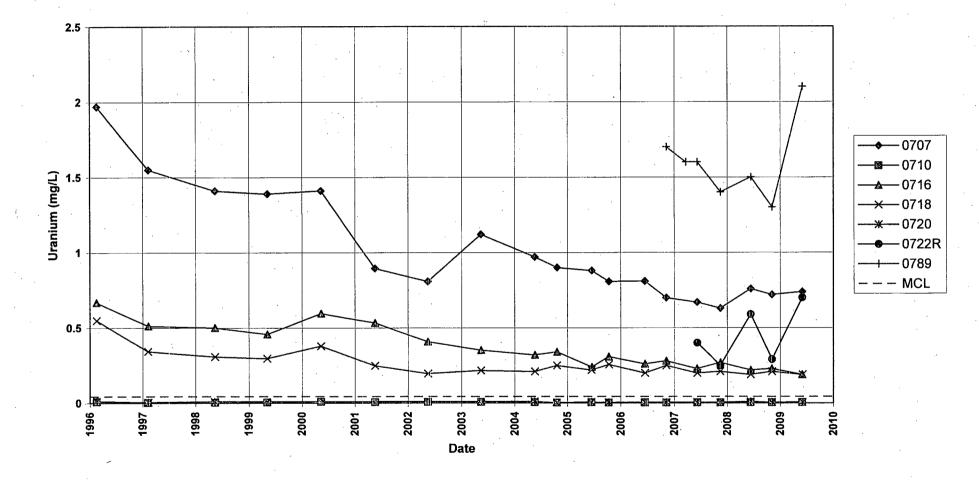

Riverton Processing Site Surficial Aquifer Locations Uranium Concentration Maximum Concentration Limit = 0.044 mg/L

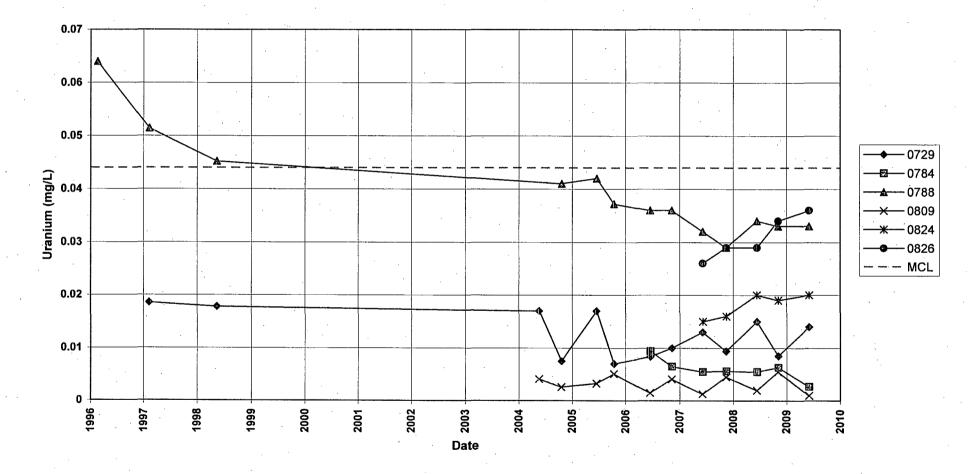

Page 96

# Attachment 3 Sampling and Analysis Work Order

Ċ

(\* )

### This page intentionally left blank

۳.,

established 1959

Task Order 1.M00-501 Control Number 09-0726

April 28, 2009

U.S. Department of Energy Office of Legacy Management ATTN: Jalena Dayvault Site Manager 2597 B ¼ Road Grand Junction, CO 81503

<u>toller</u>

### SUBJECT: Contract No. DE-AM01-07LM00060, Stoller June 2009 Environmental Sampling at the Riverton, Wyoming, Disposal Site

REFERENCE: Task Order LM-501-02-117-402, Riverton, WY, Disposal Site

Dear Ms. Dayvault:

The purpose of this letter is to inform you of the upcoming sampling event at Riverton, Wyoming. Enclosed are the map and tables specifying sample locations and analytes for monitoring at the Riverton disposal site. Water quality data will be collected from monitor wells, domestic wells, and surface locations at this site as part of the routine environmental sampling currently scheduled to begin the week of June 1, 2009.

The following lists show the monitor wells (with zone of completion), surface locations, and domestic wells scheduled to be sampled during this event.

716 Sf	719 Se	722R Sf	730 Se	788 Sf	824
717 Se	720 Sf	723 Se	735 Se	789 Sf	826
718 Sf	721 Se	729 Sf	784 Sf	809 Sf	
	716 Sf 717 Se 718 Sf	717 Se 720 Sf	717 Se 720 Sf 723 Se	717 Se 720 Sf 723 Se 735 Se	717 Se 720 Sf 723 Se 735 Se 789 Sf

\*NOTE: Se = Semi-confined sandstone; Sf = surficial

Surface	Locations		• •			
747	794	8:10	811	812	822	823
749	796					
Domesti	c Wells					
405	430	436	460	828		

All samples will be collected as directed in the Sampling and Analysis Plan for U.S. Department of Energy Office of Legacy Management Sites. Access agreements are being reviewed and are expected to be complete by the beginning of fieldwork.

The S.M. Stoller Corporation

2597 B % Road

Grand Junction, CO 81503

Jalena Dayvault Control Number 09-0726 Page 2

Please call me at (970) 248-6654, if you have any questions.

Sincerely,

San landell

Sam Campbell Site Lead

SC/lcg/lb

Enclosures (3)

cc: (electronic)

Cheri Bahrke, Stoller Sam Campbell, Stoller Steve Donivan, Stoller Bev Gallagher, Stoller Lauren Goodknight, Stoller EDD Delivery rc-grand.junction

2597 B ¼ Road

Grand Junction, CO 81503

(970) 248-6000

Fax: (970) 248-6040

C					
Site	Riverton			· · ·	
Analyte	Groundwate r	Surface Water	Required Detection Limit (mg/L)	Analytical Method	Line Item Code
Approx. No. Samples/yr	50	18			
ield Measurements	I	ı.			
Alkalinity				-	
Dissolved Oxygen				······································	
Redox Potential	X	X			
Residual Chlorine		<b> </b>			
рН	X	x			
Specific Conductance	X	X			
Turbidity	X,	X		· · · · · · · · · · · · · · · · · · ·	
Temperature	X	X ·			
aboratory Measurements				······································	
Aluminum					
Ammonia as N (NH3-N)					
Calcium					
Chloride					
Iron					
Lead				· ·	
Magnesium				•	
Manganese	Х	X	0.005	SW-846 6010	LMM-01
Molybdenum	Х	X	0.003	SW-846 6020	LMM-02
Nickel					·
Nickel-63					
Nitrate + Nitrite as N (NO3+NO2)-N			4		
Potassium					
Radium-226		0822 only	1 pCi/L	Gas Proportional Counter	GPC-A-018
Radium-228	-	0822 only	1 pCi/L	Gas Proportional Counter	GPC-A-020
Selenium					
Silica				· · · · · · · · · · · · · · · · · · ·	
Sodium					
Strontium				0141.0 10 0070	
Sulfate	Х	X	0.5	SW-846 9056	MIS-A-044
Sulfide					
Total Dissolved Solids					
Total Organic Carbon				011/ 0 /0 0000	1 1 41 4 00
Uranium	X	X	0.0001	SW-846 6020	LMM-02
Vanadium	· .	· ·			
Zinc		ļ			
Total No. of Analytes	4	6	1		

 $\Box$ 

: ,\_\_\_\_J

### This page intentionally left blan $\bar{k}$

. .;

# Attachment 4 Trip Report

Ē,

[.....

<u>ا ا</u>

### This page intentionally left blank

Stoller Grand Iunction Office

established 1959

Control Number N/A

### Memorandum

DATE: June 10, 2009

TO: Distribution

FROM: Sam Campbell

SUBJECT: Trip Report

Site: Riverton, Wyoming, Processing Site.

Dates of Sampling Event: June 1 to June 4, 2009.

Team Members: Sam Campbell and David Atkinson.

Number of Locations Sampled: 19 monitor wells, 9 surface water locations, and 6 domestic wells.

**Locations Not Sampled/Reason:** Monitor well 0735 was not sampled for safety concerns. High flows of the Little Wind River had eroded the escarpment (10 foot drop to the river) to the edge of the well.

**Location Specific Information:** Monitor wells 0705 and 0719 were purged and sampled using Category II criteria; all other monitor wells were purged and sampled using Category I criteria.

At the time of sampling, the Little Wind River was at flood stage and flowing through the Oxbow Lake.

Domestic well 0836 was sampled for the first time. The well is used for irrigation only, and the owner reports the well to be 700 feet deep. Owner contact information:

Patsy Watt 8 Welcome Road Riverton, WY 82501 (307) 851-1040

Field Variance: None.

172

**Quality Control Sample Cross Reference:** Following are the false identifications assigned to the quality control samples:

False ID	True ID	Sample Type	Ticket Number
2644	0716	Duplicate	HGZ-217
2645	Equipment Blank	Equipment Blank	HGZ-218
2646	0789	Duplicate	HGZ-219

**Requisition Numbers Assigned:** All samples were assigned to report identification number (RIN) 09052319 and were shipped to the ALS Laboratory Group on June 8, 2009.

Water Level Measurements: Water levels were measured at all sampled monitor wells and 15 additional monitor wells.

Well Inspection Summary: Concrete pads at monitor wells 0725 and 0726 have deteriorated; monitor well 0735 has been impacted by erosion from the Little Wind River and will likely be destroyed during the spring runoff. All other wells were in good shape.

**Equipment:** All equipment functioned properly. Successful testing of the upgrades to the Field Data Collection System, which included direct electronic transfer of the field data from field instrumentation into the FDCS, was completed during this event

**Stakeholder/Regulatory:** The Wind River Environmental Quality Commission (WREQC) observed sampling activities and split samples at monitor wells 0722R, 0824, and 0826.

Concerned citizen Owen Goggles stopped by during sampling to ask questions about well locations and sampling results.

Gerald Redman, director of the Northern Arapaho Utility Organization, stopped by during sampling of monitor well 0722R to discuss flushing of the alternate water supply system. One of his crews was flushing the adjacent hydrant.

#### **Institutional Controls**

Fences, Gates, Locks: No issues identified. Signs: Warning signs installed around the oxbow lake were intact. Trespassing/Site Disturbances: None

Access Issues: New phone numbers were obtained to contact owners of domestic well 0430: Lawrence Raymond (307) 851-3965 or Brent Raymond (307) 840-6243.

**Corrective Action Required/Taken**: New concrete pads are needed around monitor wells 0725 and 0726. Discussions are needed regarding the replacement of monitor well 0735.

### (SEC/lcg)

cc: (electronic)

Jalena Dayvault, DOE Cheri Bahrke, Stoller Steve Donivan, Stoller EDD Delivery