

Data Validation Package

June 2010
Groundwater Sampling at the
Shirley Basin South, Wyoming,
Disposal Site

October 2010



U.S. DEPARTMENT OF
ENERGY

Legacy
Management

FSME20

Contents

Sampling Event Summary	1
Shirley Basin South, Wyoming, Disposal Site Sample Location Map	3
Data Assessment Summary	5
Water Sampling Field Activities Verification Checklist	7
Laboratory Performance Assessment	9
Sampling Quality Control Assessment	21
Certification	23

Attachment 1—Assessment of Anomalous Data

Potential Outliers Report

Attachment 2—Data Presentation

Groundwater Quality Data
Static Water Level Data
Time-Concentration Graphs

Attachment 3—Sampling and Analysis Work Order

Attachment 4—Trip Report

This page intentionally left blank

Sampling Event Summary

Site: Shirley Basin South, Wyoming, Disposal Site

Sampling Period: June 29-30, 2010

The 2009 *Long-Term Surveillance Plan for the Shirley Basin South (UMTRCA Title II) Disposal Site, Carbon County, Wyoming*, requires annual monitoring to verify continued compliance with the pertinent alternate concentration limits (ACLs) and Wyoming Class III (livestock use) groundwater protection standards. Point-of-compliance wells 5-SC, 5-DC, and 19-DC, and monitoring wells 40-SC, 54-SC, 10-DC, and K.G.S. #3 were sampled as specified in the plan; point-of-compliance well 51-SC was dry at the time of sampling. Also sampled were five newer monitoring wells installed downgradient of the disposal cell in 2008 (100-SC, 102-SC, 110-DC, 112-DC, and 113-DC); new well 101-SC was dry at the time of sampling. The water level was measured at each sampled well. Sampling and analysis were conducted in accordance with *Sampling and Analysis Plan for the U. S. Department of Energy Office of Legacy Management Sites (LMS/PLN/S04351, continually updated)*.

Monitoring wells with an "SC" suffix are completed in the upper sand aquifer of the Wind River Formation. Wells with a "DC" suffix are completed in the main sand aquifer. Well K.G.S. #3 is completed in the lower sand aquifer, which is hydraulically separated from the overlying main sand and upper sand aquifers.


ACLs are approved for cadmium, chromium, lead, nickel, radium-226, radium-228, selenium, thorium-230, and uranium in site groundwater. As shown on Table 1, radium-228 concentrations remain above the ACL in wells 5-DC and 54-SC. The elevated radium-228 concentrations apparently are related to naturally occurring thorium ore. Radium-226 exceeded the ACL in downgradient well 110-DC. The elevated radium-226 concentration in this well was first observed in July 2009 with the concentration confirmed in November 2009. The wells near the disposal cell do not exhibit elevated radium-226 concentrations, so the concentration in well 110-DC is suspected to be due to natural causes. No other ACLs were exceeded.

Table 1. Wells with Results Exceeding an ACL

Analyte	ACL	110-DC	5-DC	54-SC
Radium-226	91.3 pCi/L	134 pCi/L		
Radium-228	25.7 pCi/L		43.3 pCi/L	107 pCi/L

Key: ACL = alternate concentration limit; pCi/L = picocuries per liter

Concentrations of sulfate and total dissolved solids continue to exceed their respective Wyoming Class III groundwater protection standards for livestock use in wells 5-DC, 5-SC, and 54-SC as they have done throughout the sampling history; however, there is no livestock use of the water from these aquifers at the site.

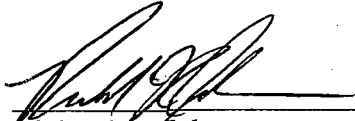

Richard K. Johnson
Site Lead, S.M. Stoller Corporation

10/20/10

Date



U.S. DEPARTMENT OF ENERGY GRAND JUNCTION, COLORADO	Work Performed by S.M. Stoller Corporation Under DOE Contract No. DE-AM51-07LM00088
Planned Sampling Map Shirley Basin South, WY, Disposal Site June 2010	
DATE PREPARED: October 8, 2010	FILENAME: S0653300

M:\LTS11110001116\0001S06553\0655300-11x17.mxd smithw 10/8/2010 9:52:15 AM

Shirley Basin South, Wyoming, Disposal Site Sample Location Map

Draft

This page intentionally left blank

Data Assessment Summary

This page intentionally left blank

Water Sampling Field Activities Verification Checklist

Project	<u>Shirley Basin South, Wyoming</u>	Date(s) of Water Sampling	<u>June 29-30, 2010</u>
Date(s) of Verification	<u>September 15, 2010</u>	Name of Verifier	<u>Steve Donovan</u>

	Response (Yes, No, NA)	Comments
1. Is the SAP the primary document directing field procedures? List other documents, SOPs, instructions.	Yes	Work Order Letter date May 10, 2010.
2. Were the sampling locations specified in the planning documents sampled?	No	Wells 101-SC and 51-SC were dry.
3. Was a pre-trip calibration conducted as specified in the above-named documents?	Yes	Pre-trip calibration was performed on June 28, 2010.
4. Was an operational check of the field equipment conducted daily? Did the operational checks meet criteria?	Yes Yes	
5. Were the number and types (alkalinity, temperature, specific conductance, pH, turbidity, DO, ORP) of field measurements taken as specified?	Yes	
6. Was the category of the well documented?	Yes	
7. Were the following conditions met when purging a Category I well: Was one pump/tubing volume purged prior to sampling? Did the water level stabilize prior to sampling? Did pH, specific conductance, and turbidity measurements stabilize prior to sampling? Was the flow rate less than 500 mL/min? If a portable pump was used, was there a 4-hour delay between pump installation and sampling?	Yes Yes No Yes NA	The pH in well 54-SC did not stabilize.

Water Sampling Field Activities Verification Checklist (continued)

	Response (Yes, No, NA)	Comments
8. Were the following conditions met when purging a Category II well: Was the flow rate less than 500 mL/min?	Yes	
Was one pump/tubing volume removed prior to sampling?	Yes	
9. Were duplicates taken at a frequency of one per 20 samples?	Yes	A duplicate sample was collected from well 40-SC.
10. Were equipment blanks taken at a frequency of one per 20 samples that were collected with nondedicated equipment?	NA	Dedicated equipment was used at all locations.
11. Were trip blanks prepared and included with each shipment of VOC samples?	NA	
12. Were QC samples assigned a fictitious site identification number? Was the true identity of the samples recorded on the Quality Assurance Sample Log or in the Field Data Collection System (FDCCS) report?	Yes	Location ID 2940 was used for the duplicate sample.
	Yes	
13. Were samples collected in the containers specified?	Yes	
14. Were samples filtered and preserved as specified?	Yes	
15. Were the number and types of samples collected as specified?	Yes	
16. Were chain of custody records completed and was sample custody maintained?	Yes	
17. Are field data sheets signed and dated by both team members (hardcopies) or are dates present for the "Date Signed" fields (FDCCS)?	Yes	
18. Was all other pertinent information documented on the field data sheets?	Yes	
19. Was the presence or absence of ice in the cooler documented at every sample location?	Yes	
20. Were water levels measured at the locations specified in the planning documents?	Yes	

Laboratory Performance Assessment

General Information

Report Number (RIN): 10063127
Sample Event: June 29–30, 2010
Site(s): Shirley Basin South, Wyoming
Laboratory: ALS Laboratory Group, Fort Collins, Colorado
Work Order No.: 1007019
Analysis: Metals, Inorganic, and Radiochemistry
Validator: Steve Donivan
Review Date: September 15, 2010

This validation was performed according to the *Environmental Procedures Catalog*, (LMS/PRO/S04325, continually updated) “Standard Practice for Validation of Laboratory Data.” The procedure was applied at Level 3, Data Validation. See attached Data Validation Worksheets for supporting documentation on the data review and validation. All analyses were successfully completed. The samples were prepared and analyzed using accepted procedures based on methods specified by line item code, which are listed in Table 2.

Table 2. Analytes and Methods

Analyte	Line Item Code	Prep Method	Analytical Method
Cadmium, Lead, Selenium, Uranium	LMM-02	SW-846 3005A	SW-846 6020A
Chloride	MIS-A-039	SW-846 9056	SW-846 9056
Chromium, Nickel	LMM-01	SW-846 3005A	SW-846 6010B
Nitrate + Nitrite as N	WCH-A-022	MCAWW 353.2	MCAWW 353.2
Radium-226	GPC-A-018	SOP712R14	SOP724R10
Radium-228	GPC-A-020	SW-846 9320	SW-846 9320
Sulfate	MIS-A-044	SW-846 9056	SW-846 9056
Thorium Isotopes	ASP-A-008	SOP776R11	SOP714R11
Total Dissolved Solids	WCH-A-033	MCAWW 160.1	MCAWW 160.1

Data Qualifier Summary

Analytical results were qualified as listed in Table 3. Refer to the sections below for an explanation of the data qualifiers applied.

Table 3. Data Qualifier Summary

Sample Number	Location	Analyte(s)	Flag	Reason
All	All	Radium-226	J	Yield adjusted by laboratory
1007019-3	10-DC	Thorium-230	J	Less than the determination limit
1007019-5	112-DC	Radium-228	J	Yield adjusted by laboratory
1007019-5	112-DC	Thorium-228	J	Less than the determination limit
1007019-5	112-DC	Thorium-232	U	Less than the decision level concentration
1007019-8	40-SC Duplicate	Cadmium	J	Poor field duplicate precision
1007019-8	40-SC Duplicate	Radium-228	J	Less than the determination limit
1007019-9	40-SC	Cadmium	J	Poor field duplicate precision
1007019-9	40-SC	Radium-228	J	Less than the determination limit
1007019-11	5-DC	Thorium-228	J	Spectra interference
1007019-12	5-SC	Radium-228	J	Yield adjusted by laboratory
1007019-13	K.G.S.#3	Radium-228	J	Less than the determination limit

Sample Shipping/Receiving

ALS Laboratory Group in Fort Collins, Colorado, received 13 water samples on July 1, 2010, accompanied by a Chain of Custody (COC) form. Copies of the three air bills were included in the receiving documentation. The COC form was checked to confirm that all of the samples were listed with sample collection dates and times, and that signatures and dates were present indicating sample relinquishment and receipt. The COC form was complete with no errors or omissions.

Preservation and Holding Times

The sample shipment was received intact with the temperature inside the iced cooler at 3.4 °C, which complies with requirements. All samples were received in the correct container types and had been preserved correctly for the requested analyses. All samples were analyzed within the applicable holding times.

Laboratory Instrument Calibration

Compliance requirements for satisfactory instrument calibration are established to ensure that the instrument is capable of producing acceptable qualitative and quantitative data for all analytes. Initial calibration demonstrates that the instrument is capable of acceptable performance in the beginning of the analytical run and of producing a linear curve. Compliance requirements for continuing calibration checks are established to ensure that the instrument continues to be capable of producing acceptable qualitative and quantitative data. All laboratory instrument calibrations were performed correctly in accordance with the cited methods. All calibration and laboratory spike standards were prepared from independent sources

Method MCAWW 160.1, Total Dissolved Solids

There is no initial or continuing calibration requirement associated with the determination of total dissolved solids.

Method MCAWW 353.2, Nitrate + Nitrite as N

Calibrations were performed on July 8, 2010, using seven calibration standards. The calibration curve correlation coefficient values were greater than 0.995 and the absolute values of the intercepts were less than 3 times the method detection limit (MDL). Initial and continuing calibration verification (CCV) checks were made at the required frequency resulting in nine verification checks. All calibration checks met the acceptance criteria.

Method SW-846 6010B, Chromium and Nickel

Single point calibrations were performed for chromium and nickel on July 29, 2010. Initial and CCV checks were made at the required frequency resulting in 14 verification checks. All calibration checks met the acceptance criteria. Reporting limit verification checks were made at the required frequency to verify the linearity of the calibration curve near the practical quantitation limit (PQL) and all results were within the acceptance range.

Method SW-846 6020A, Cadmium, Lead, Selenium, and Uranium

Calibrations for cadmium, lead, selenium, and uranium were performed on July 28, 2010, using four calibration standards. The calibration curve correlation coefficient values were greater than 0.995 and the absolute values of the intercepts were less than 3 times the MDL. Initial and CCV checks were made at the required frequency resulting in 17 verification checks. Reporting limit verification checks were made at the required frequency to verify the linearity of the calibration curve near the PQL, the cadmium results were not within the acceptance range. Sample cadmium results that are less than 5 times the PQL are qualified with a "J" flag as estimated values. Mass calibration and resolution verifications were performed at the beginning of each analytical run in accordance with the analytical procedure. Internal standard recoveries associated with requested analytes were stable and within acceptable ranges.

Method SW-846 9056, Chloride and Sulfate

Calibrations were performed on July 1, 2010, and July 13, 2010, using five calibration standards. The calibration curve correlation coefficient values were greater than 0.995 and the absolute values of the intercepts were less than 3 times the MDL. Initial and CCV checks were made at the required frequency resulting in 19 verification checks. All calibration checks met the acceptance criteria with the exception of CCV3 for sulfate on July 07, 2010. The samples bracketed by this CCV were re-analyzed with acceptable CCV.

Radiochemical Analysis

Radiochemical results are qualified with a "J" flag (estimated) when the result is greater than the minimum detectable concentration (MDC), but less than Determination Limit (3 times the MDC). Radiochemical results are qualified with a "U" flag (not detected) when the result is greater than the MDC, but less than the Decision Level Concentration estimated as the two sigma total propagated uncertainty.

Radium-226

Plateau voltage determinations were performed in November 2009. Efficiency calibrations were performed in March 2010. Daily instrument checks met the acceptance criteria. The chemical recoveries met the acceptance criteria of 40 to 110 percent for all samples. Chemical recoveries

for all of the samples were adjusted by the laboratory to minimize possible low biases. The results for these samples are qualified with a "J" flag (estimated).

Radium-228

Plateau voltage determinations and detector efficiency calibrations were performed in June 2010. Daily instrument checks performed on July 27, 2010, met the acceptance criteria. The chemical recoveries met the acceptance criteria of 40 to 110 percent for all samples. Chemical recoveries for several of the samples were adjusted by the laboratory to minimize possible low biases. The results for these samples are qualified with a "J" flag (estimated).

Thorium Isotopes

Alpha spectrometry calibrations were performed on August 5, 2009. Instrument background was determined on August 5, 2009. The tracer recoveries met the acceptance criteria of 30 to 110 percent for all samples with the exception of 40-SC. The spectral quality for this sample is adequate for accurate quantification and the result is greater than the MDC. The results are acceptable without further qualification. The full width at half maximum was reviewed to evaluate the spectral resolution. For several samples, the tracer full width at half maximum exceeded 100 kiloelectron volts, which is expected for isotopes such as thorium-229 with alpha emissions at multiple energies. These tracer peaks did not appear to compromise the data by contributing significantly to the thorium-230 region of interest. The laboratory noted that the thorium-230 results were corrected for thorium-229 contribution based on historical method blank data. All internal standard peaks were within 50 kiloelectron volts of the expected position. The regions of interest for analyte peaks were reviewed. No manual integrations were performed and all regions of interest were satisfactory with the following exception. There is evidence of spectra interference near the thorium-228 peak for sample 5-DC. The thorium-228 result for this sample is qualified with a "J" flag as an estimated value.

Method and Calibration Blanks

Method blanks are analyzed to assess any contamination that may have occurred during sample preparation. Calibration blanks are analyzed to assess instrument contamination prior to and during sample analysis.

Metals and Wet Chemistry

All method blank and calibration blank (CCB) results associated with the samples were below the PQL for all analytes with the exception of CCB2 for nitrate/nitrite as N, CCB1 and CCB15 for sulfate on July 13, 2010, and CCB5 for chromium and nickel. None of the samples associated with this RIN were bracketed by nitrate/nitrite as N blank or metals CCB5. The samples bracketed by the CCBs for sulfate contained more than 10 times the concentration of sulfate detected in the CCB. In cases where a blank concentration exceeds the MDL, the associated sample results are qualified with a "U" flag (not detected) when the sample result is greater than the MDL but less than 5 times the blank concentration.

Radiochemistry

All radiochemical method blank results were below the MDC with the exception of thorium-232. Thorium-232 sample results that are greater than the MDC but less than 5 times the blank concentration are qualified with a "J" flag as estimated values.

Inductively Coupled Plasma (ICP) Interference Check Sample (ICS) Analysis

ICP interference check samples ICSA and ICSAB were analyzed at the required frequency to verify the instrumental interelement and background correction factors. All check sample results met the acceptance criteria.

Matrix Spike Analysis

Matrix spike and matrix spike duplicate (MS/MSD) samples are used to measure method performance in the sample matrix for the metals and wet chemistry analyses. The MS/MSD data are not evaluated when the concentration of the unspiked sample is greater than 4 times the spike concentration. The spikes met the recovery and precision criteria for all analytes evaluated.

Laboratory Replicate Analysis

Laboratory replicate sample results demonstrate acceptable laboratory precision. The relative percent difference values for the non-radiochemical sample replicates and matrix spike replicates are less than 20 percent for results that are greater than 5 times the PQL, indicating acceptable precision.

The radiochemical relative error ratio (calculated using the one-sigma total propagated uncertainty) for the sample replicates and laboratory control sample replicates was less than three, indicating acceptable precision.

Laboratory Control Sample

Laboratory control samples were analyzed at the correct frequency to provide information on the accuracy of the analytical method and the overall laboratory performance, including sample preparation. All control sample results were acceptable.

Metals Serial Dilution

Serial dilutions were prepared and analyzed for the metals analyses to monitor chemical or physical interferences in the sample matrix. Serial dilution data are evaluated when the concentration of the undiluted sample is greater than 100 times the PQL for ICP-MS or greater than 50 times the PQL for ICP. All evaluated serial dilution data were acceptable.

Detection Limits/Dilutions

Samples were diluted in a consistent and acceptable manner when required. The required detection limits were met for all metals and wet chemistry analytes.

All radiochemical MDCs were calculated as specified in *Quality Systems for Analytical Services*. All reported MDCs were less than the required MDCs with the exception of three thorium isotope MDCs. The associated sample results were greater than the reported detection limit.

Completeness

Results were reported in the correct units for all analytes requested using contract-required laboratory qualifiers. The analytical report included the MDL (MDC for radiochemistry) and PQL for all analytes and all required supporting documentation.

Chromatography Peak Integration

The integration of analyte peaks was reviewed for all ion chromatography data. All peak integrations, including manual integrations, were satisfactory.

Electronic Data Deliverable (EDD) File

The EDD file arrived on August 2, 2010. The Sample Management System EDD validation module was used to verify that the EDD file was complete and in compliance with requirements. The module compares the contents of the file to the requested analyses to ensure all and only the requested data are delivered. The contents of the EDD were manually examined to verify that the sample results accurately reflect the data contained in the sample data package.

SAMPLE MANAGEMENT SYSTEM

General Data Validation Report

RIN: 10063127 Lab Code: PAR Validator: Steve Donivan Validation Date: 9/15/2010

Project: Shirley Basin South Analysis Type: Metals General Chem Rad Organics

of Samples: 13 Matrix: WATER Requested Analysis Completed: Yes

Chain of Custody

Present: OK Signed: OK Dated: OK

Sample

Integrity: OK Preservation: OK Temperature: OK

Select Quality Parameters

- Holding Times
- Detection Limits
- Field/Trip Blanks
- Field Duplicates

All analyses were completed within the applicable holding times.

There are 3 detection limit failures.

There was 1 duplicate evaluated.

SAMPLE MANAGEMENT SYSTEM

RIN: 10063127 Lab Code: PAR

Non-Compliance Report: Detection Limits

Project: Shirley Basin South

Validation Date: 9/15/2010

Ticket	Location	Lab Sample ID	Method Code	Lab Method	Analyte Name	Result	Qualifier	Reported Detection Limit	Required Detection Limit	Units
HV 360	S-SC	1007019-10	ASP-A-008	714R12	Thorium-230	5.21		1.4	1	pCi/L
HV 347	S-SC	1007019-12	ASP-A-008	714R12	Thorium-230	421		2.8	1	pCi/L
HV 347	S-SC	1007019-12	ASP-A-008	714R12	Thorium-228	47.8		1.8	1	pCi/L

SAMPLE MANAGEMENT SYSTEM
Metals Data Validation Worksheet

RIN: 10063127 Lab Code: PAR Date Due: 7/29/2010
 Matrix: Water Site Code: SBS Date Completed: 8/3/2010

Analyte	Date Analyzed	CALIBRATION							Method Blank	LCS %R	MS %R	MSD %R	Dup. RPD	ICSAB %R	Serial Dil. %R	CRI %R
		Int.	R^2	ICV	CCV	ICB	CCB									
Cadmium	07/28/2010	0.0000	1.0000	OK	OK	OK	OK	OK	96.0	95.0	95.2	0.0	103.0		102.0	
Chromium	07/29/2010			OK	OK	OK	OK	OK	96.0	88.0	89.0	1.0	88.0		99.0	
Lead	07/28/2010	0.0000	1.0000	OK	OK	OK	OK	OK	102.0	99.0	99.9	1.0	106.0		110.0	
Nickel	07/29/2010			OK	OK	OK	OK	OK	99.0	91.0	92.0	1.0	88.0		105.0	
Selenium	07/28/2010	0.0000	1.0000	OK	OK	OK	OK	OK	93.0	105.0	105.7	1.0	104.0		110.0	
Uranium	07/28/2010	0.0000	1.0000	OK	OK	OK	OK	OK	95.0	100.0	99.4	0.0	105.0	1.0	120.0	

SAMPLE MANAGEMENT SYSTEM
Wet Chemistry Data Validation Worksheet

RIN: 10063127 Lab Code: PAR Date Due: 7/29/2010
 Matrix: Water Site Code: SBS Date Completed: 8/3/2010

Analyte	Date Analyzed	CALIBRATION						Method Blank	LCS %R	MS %R	MSD %R	DUP RPD	Serial Dil. %R
		Int.	R ²	ICV	CCV	ICB	CCB						
CHLORIDE	07/07/2010	0.000	1.0000	OK	OK	OK	OK	OK	96.00	104.0	100.0	2.00	
Nitrate+Nitrite as N	07/08/2010	0.000	1.0000	OK	OK	OK	OK	OK	94.00	103.0	108.0	4.00	
SULFATE	07/07/2010	0.000	1.0000	OK	OK	OK	OK	OK	95.00	102.0	97.0	1.00	
TOTAL DISSOLVED SOLIDS	07/07/2010							OK	98.00			1.00	
TOTAL DISSOLVED SOLIDS	07/07/2010											1.00	

SAMPLE MANAGEMENT SYSTEM
Radiochemistry Data Validation Worksheet

RIN: 10063127 Lab Code: PAR Date Due: 7/29/2010
 Matrix: Water Site Code: SBS Date Completed: 8/3/2010

Sample	Analyte	Date Analyzed	Result	Flag	Tracer %R	LCS %R	MS %R	Duplicate
100-SC	Radium-226	07/23/2010			93.6			
102-SC	Radium-226	07/23/2010			87.8			
10-DC	Radium-226	07/23/2010			95.9			
110-DC	Radium-226	07/23/2010			88.9			
112-DC	Radium-226	07/23/2010			92.0			
113-DC	Radium-226	07/23/2010			93.4			
19-DC	Radium-226	07/23/2010			94.8			
2940	Radium-226	07/23/2010			86.1			
40-SC	Radium-226	07/23/2010			91.3			
54-SC	Radium-226	07/23/2010			90.3			
5-DC	Radium-226	07/23/2010			90.0			
5-SC	Radium-226	07/23/2010			91.2			
K.G.S.#3	Radium-226	07/23/2010			90.9			
Blank_Spike	Radium-226	07/23/2010			93.7	95.80		
Blank_Spike_DU	Radium-226	07/23/2010			92.3	92.20		0.20
Blank	Radium-226	07/23/2010	0.1600	U	88.6			
100-SC	Radium-228	07/27/2010			79.5			
102-SC	Radium-228	07/27/2010			71.9			
10-DC	Radium-228	07/27/2010			66.5			
110-DC	Radium-228	07/27/2010			70.4			
112-DC	Radium-228	07/27/2010			67.3			
113-DC	Radium-228	07/27/2010			68.3			
19-DC	Radium-228	07/27/2010			76.6			
2940	Radium-228	07/27/2010			76.2			
40-SC	Radium-228	07/27/2010			76.1			
54-SC	Radium-228	07/27/2010			71.2			
5-DC	Radium-228	07/27/2010			70.4			
5-SC	Radium-228	07/27/2010			71.6			
K.G.S.#3	Radium-228	07/27/2010			74.0			
Blank_Spike	Radium-228	07/27/2010			70.3	113.00		
Blank_Spike_DU	Radium-228	07/27/2010			74.6	100.00		0.60
Blank	Radium-228	07/27/2010	0.3850	U	75.2			

SAMPLE MANAGEMENT SYSTEM
Radiochemistry Data Validation Worksheet

RIN: 10063127 Lab Code: PAR Date Due: 7/29/2010
 Matrix: Water Site Code: SBS Date Completed: 8/3/2010

Sample	Analyte	Date Analyzed	Result	Flag	Tracer %R	LCS %R	MS %R	Duplicate
100-SC	Thorium-228	07/21/2010			63.4			
102-SC	Thorium-228	07/21/2010			47.6			
10-DC	Thorium-228	07/21/2010			62.3			
110-DC	Thorium-228	07/21/2010			63.1			
112-DC	Thorium-228	07/21/2010			69.8			
113-DC	Thorium-228	07/21/2010			71.8			
19-DC	Thorium-228	07/21/2010			63.2			
2940	Thorium-228	07/21/2010			62.7			
54-SC	Thorium-228	07/21/2010			77.7			
5-DC	Thorium-228	07/21/2010			60.7			
5-SC	Thorium-228	07/21/2010			77.2			
K.G.S.#3	Thorium-228	07/21/2010			51.1			
112-DC	Thorium-228	07/21/2010			61.2			2.75
40-SC	Thorium-228	07/21/2010			67.4			0.28
Blank	Thorium-228	07/22/2010	-0.1080	U	49.6			
40-SC	Thorium-228	07/26/2010			26.7			
Blank Spike	Thorium-230	07/21/2010			28.4	101.00		
112-DC	Thorium-230	07/21/2010						1.56
40-SC	Thorium-230	07/21/2010						0.13
Blank	Thorium-230	07/22/2010	-0.0605	U				
112-DC	Thorium-232	07/21/2010						0.97
40-SC	Thorium-232	07/21/2010						0.17
Blank	Thorium-232	07/22/2010	0	U				

Sampling Quality Control Assessment

The following information summarizes and assesses quality control for this sampling event.

Sampling Protocol

Sample results for all Category I or II monitoring wells were qualified with an "F" flag in the database, indicating the wells were purged and sampled using the low-flow sampling method. Wells 102-SC and K.G.S.#3 were classified as Category IV. All other wells met the Category I criteria with the following exceptions:

- Well 100-SC was classified as Category II.
- The change in pH exceeded the Category I criterion for well 54-SC.

The sample results for these wells were qualified with a "Q" flag, indicating the data are qualitative because of the sampling technique.

Equipment Blank Assessment

An equipment blank was not required because samples were collected using dedicated equipment.

Field Duplicate Assessment

Field duplicate samples are collected and analyzed as an indication of overall precision of the measurement process. The precision observed includes both field and laboratory precision and has more variability than laboratory duplicates, which measure only laboratory performance. The relative percent difference for non-radiochemical duplicate results that are greater than 5 times the PQL should be less than 20 percent. For results less than 5 times the PQL, the range should be no greater than the PQL. The radiochemical duplicate results should have a relative error ratio (calculated using the one-sigma total propagated uncertainty) of less than three. One duplicate sample was collected from location 40-SC. With the following exception, the duplicate results met the acceptance criteria. The difference in cadmium results is outside acceptance limits. The sample and duplicate results for cadmium are qualified with a "J" flag as estimated values.

SAMPLE MANAGEMENT SYSTEM
Validation Report: Field Duplicates

Page 1 of 1

RIN: 10063127 Lab Code: PAR Project: Shirley Basin South Validation Date: 9/15/2010

Duplicate: 2940

Sample: 40-SC

Analyte	Sample				Duplicate				RPD	RER	Units
	Result	Flag	Error	Dilution	Result	Flag	Error	Dilution			
Cadmium	0.075			1	0.22			1	98.31		UG/L
CHLORIDE	42			20	41			20	2.41		MG/L
Chromium	0.51	U		1	0.51	U		1			UG/L
Lead	0.068			1	0.0068	U		1			UG/L
Nickel	6.9			1	8.2			1	17.22		UG/L
Nitrate+Nitrite as N	1.5			1	1.5			1	0		MG/L
Radium-226	0.185		0.136	1	0.414		0.217	1		1.8	pCi/L
Radium-228	1.03		0.438	1	0.959		0.432	1		0.2	pCi/L
Selenium	6.9			1	7			1	1.44		UG/L
SULFATE	1700			20	1700			20	0		MG/L
Thorium-228	-0.0526	U	0.451	1	-0.049	U	0.165	1		0	pCi/L
Thorium-230	0.0964	U	0.508	1	0.478	U	0.432	1		1.1	pCi/L
Thorium-232	-0.00733	U	0.148	1	0.0268	U	0.0868	1		0.4	pCi/L
TOTAL DISSOLVED SOLIDS	2600			1	2600			1	0		MG/L
Uranium	0.25			1	0.26			1	3.92		UG/L

Certification

All laboratory analytical quality control criteria were met except as qualified in this report. The data qualifiers listed on the SEEPro database reports are defined on the last page of each report. All data in this package are considered validated and available for use.

Laboratory Coordinator:

Steve Donovan
Steve Donovan

10-20-2010
Date

Data Validation Lead:

Steve Donovan
Steve Donovan

10-20-2010
Date

This page intentionally left blank

Attachment 1
Assessment of Anomalous Data

This page intentionally left blank

Potential Outliers Report

This page intentionally left blank

Potential Outliers Report

Potential outliers are measurements that are extremely large or small relative to the rest of the data and, therefore, are suspected of misrepresenting the population from which they were collected. Potential outliers may result from transcription errors, data-coding errors, or measurement system problems. However, outliers may also represent true extreme values of a distribution and indicate more variability in the population than was expected.

Statistical outlier tests give probabilistic evidence that an extreme value does not "fit" with the distribution of the remainder of the data and is therefore a statistical outlier. These tests should only be used to identify data points that require further investigation. The tests alone cannot determine whether a statistical outlier should be discarded or corrected within a data set.

There are three steps involved in identifying extreme values or outliers:

1. Identify extreme values that may be potential outliers by generating the Outliers Report using the Sample Management System from data in the SEEPro database. The application compares the new data set with historical data and lists the new data that fall outside the historical data range. A determination is also made if the data are normally distributed using the Shapiro-Wilk Test.
2. Apply the appropriate statistical test. Dixon's Extreme Value test is used to test for statistical outliers when the sample size is less than or equal to 25. This test considers both extreme values that are much smaller than the rest of the data (case 1) and extreme values that are much larger than the rest of the data (case 2). This test is valid only if the data without the suspected outlier are normally distributed. Rosner's Test is a parametric test that is used to detect outliers for sample sizes of 25 or more. This test also assumes that the data without the suspected outliers are normally distributed.
3. Scientifically review statistical outliers and decide on their disposition.

The thorium-228 result for location 5-DC was identified as a potential outlier. This result was qualified as an estimated value based on suspected spectral interference. The data for this event are acceptable as qualified.

Data Validation Outliers Report - No Field Parameters

Comparison: All Historical Data

Laboratory: ALS Laboratory Group

RIN: 10063127

Report Date: 9/15/2010

Site Code	Location Code	Sample ID	Sample Date	Analyte	Current		Historical Maximum			Historical Minimum			Number of Data Points		Statistical Outlier
					Result	Qualifiers Lab Data	Result	Qualifiers Lab Data	Result	Qualifiers Lab Data	N	N Below Detect			
SBS01	10-DC	N001	06/30/2010	Cadmium	0.000039	F	0.05	U	0.000044	U	FJ	48	41	No	
SBS01	10-DC	N001	06/30/2010	Nickel	0.00093	U F	3.83		0.00095	B	F	48	30	No	
SBS01	19-DC	N001	06/30/2010	Sulfate	3000	F	2900	F	1190			25	0	No	
SBS01	19-DC	N001	06/30/2010	Total Dissolved Solids	4600	F	4400	F	2500	FQ		9	0	No	
SBS01	40-SC	N001	06/30/2010	Cadmium	0.000075	FJ	0.06		0.00011	B	FJ	57	41	No	
SBS01	40-SC	N002	06/30/2010	Nickel	0.0082	F	0.19		0.0099	B	F	61	30	No	
SBS01	40-SC	N001	06/30/2010	Nickel	0.0069	F	0.19		0.0099	B	F	61	30	No	
SBS01	40-SC	N002	06/30/2010	Nitrate + Nitrite as Nitrogen	1.5	F	1.2	F	0.28		FJ	10	0	No	
SBS01	40-SC	N001	06/30/2010	Nitrate + Nitrite as Nitrogen	1.5	F	1.2	F	0.28		FJ	10	0	No	
SBS01	40-SC	N002	06/30/2010	Total Dissolved Solids	2600	F	4000	FJ	3000		F	12	0	No	
SBS01	40-SC	N001	06/30/2010	Total Dissolved Solids	2600	F	4000	FJ	3000		F	12	0	No	
SBS01	40-SC	N001	06/30/2010	Uranium	0.00025	F	0.11		0.0003	U		85	25	No	
SBS01	40-SC	N002	06/30/2010	Uranium	0.00026	F	0.11		0.0003	U		85	25	No	
SBS01	54-SC	N001	06/29/2010	Nitrate + Nitrite as Nitrogen	0.02	FQ	20	U F	0.1	U	F	6	5	No	
SBS01	54-SC	N001	06/29/2010	Thorium-232	4.45	FQ	8.72	F	4.83		FQ	6	0	No	
SBS01	5-DC	N001	06/30/2010	Cadmium	0.000058	U F	0.1		0.00011	B	FJ	59	22	No	
SBS01	5-DC	N001	06/30/2010	Chromium	0.0045	B F	0.25		0.01	U		59	29	No	
SBS01	5-DC	N001	06/30/2010	Nitrate + Nitrite as Nitrogen	0.027	F	10	U F	0.1	U	F	6	5	No	

Data Validation Outliers Report - No Field Parameters

Comparison: All Historical Data
 Laboratory: ALS Laboratory Group
 RIN: 10063127
 Report Date: 9/15/2010

Site Code	Location Code	Sample ID	Sample Date	Analyte	Current		Historical Maximum			Historical Minimum			Number of Data Points		Statistical Outlier
					Result	Qualifiers Lab. Data	Result	Lab.	Data	Result	Lab.	Data	N	N Below Detect	
SBS01	5-DC	N001	06/30/2010	Thorium-228	5.83	FJ	2.92		F	1.97		F	6	0	Yes
SBS01	5-DC	N001	06/30/2010	Total Dissolved Solids	9400	F	9200		F	6620			8	0	No
SBS01	5-SC	N001	06/30/2010	Thorium-228	47.8	F	58.1		F	49.6		F	7	0	No
SBS01	K.G.S.#3	N001	06/30/2010	Nitrate + Nitrite as Nitrogen	0.15		0.025		F	0.01		U F	5	4	No

Data Validation Outliers Report - Field Parameters Only

Comparison: All Historical Data
 Laboratory: Field Measurements
 RIN: 10063127
 Report Date: 9/15/2010

Site Code	Location Code	Sample ID	Sample Date	Analyte	Current		Historical Maximum			Historical Minimum			Number of Data Points		Statistical Outlier
					Result	Qualifiers Lab. Data	Result	Lab.	Data	Result	Lab.	Data	N	N Below Detect	
SBS01	19-DC	N001	06/30/2010	Specific Conductance	4503	F	4320			2500			17	0	No
SBS01	19-DC	N001	06/30/2010	Temperature	12.9	F	12.45		F	9.59			6	0	No
SBS01	5-DC	N001	06/30/2010	Turbidity	9.6	F	9.56		F	0.64		F	7	0	No

STATISTICAL TESTS:

The distribution of the data is tested for normality or lognormality using the Shapiro-Wilk Test
 Outliers are identified using Dixon's Test when there are 25 or fewer data points.
 Outliers are identified using Rosner's Test when there are 26 or more data points.
 See Data Quality Assessment: Statistical Methods for Practitioners, EPA QC/G-9S, February 2006.

This page intentionally left blank

Attachment 2
Data Presentation

This page intentionally left blank

Groundwater Quality Data

This page intentionally left blank

Groundwater Quality Data by Location (USEE100) FOR SITE SBS01, Shirley Basin South Disposal Site

REPORT DATE: 9/15/2010

Location: 10-DC WELL

Parameter	Units	Sample Date	Sample ID	Depth Range (Ft:BLS)	Result	Qualifiers			Detection Limit	Uncertainty
						Lab	Data	QA		
Cadmium	mg/L	06/30/2010	N001	180.8 - 220.8	0.000039		F	#	0.000012	
Chloride	mg/L	06/30/2010	N001	180.8 - 220.8	55		F	#	4	
Chromium	mg/L	06/30/2010	N001	180.8 - 220.8	0.00051	U	F	#	0.00051	
Lead	mg/L	06/30/2010	N001	180.8 - 220.8	0.00039		F	#	0.0000068	
Nickel	mg/L	06/30/2010	N001	180.8 - 220.8	0.00093	U	F	#	0.00093	
Nitrate + Nitrite as Nitrogen	mg/L	06/30/2010	N001	180.8 - 220.8	0.01	U	F	#	0.01	
Oxidation Reduction Potential	mV	06/30/2010	N001	180.8 - 220.8	-19.2		F	#		
pH	s.u.	06/30/2010	N001	180.8 - 220.8	6.69		F	#		
Radium-226	pCi/L	06/30/2010	N001	180.8 - 220.8	13.5		FJ	#	0.14	3.51
Radium-228	pCi/L	06/30/2010	N001	180.8 - 220.8	4.19		F	#	0.53	1.33
Selenium	mg/L	06/30/2010	N001	180.8 - 220.8	0.000032	U	F	#	0.000032	
Specific Conductance	umhos/cm	06/30/2010	N001	180.8 - 220.8	2114		F	#		
Sulfate	mg/L	06/30/2010	N001	180.8 - 220.8	1100		F	#	10	
Temperature	C	06/30/2010	N001	180.8 - 220.8	11.56		F	#		
Thorium-228	pCi/L	06/30/2010	N001	180.8 - 220.8	0.54	U	F	#	0.54	0.306
Thorium-230	pCi/L	06/30/2010	N001	180.8 - 220.8	0.707		FJ	#	0.68	0.468
Thorium-232	pCi/L	06/30/2010	N001	180.8 - 220.8	0.21	U	F	#	0.21	0.107
Total Dissolved Solids	mg/L	06/30/2010	N001	180.8 - 220.8	1800		F	#	40	
Turbidity	NTU	06/30/2010	N001	180.8 - 220.8	4.9		F	#		
Uranium	mg/L	06/30/2010	N001	180.8 - 220.8	0.013		F	#	0.0000029	

Groundwater Quality Data by Location (USEE100) FOR SITE SBS01, Shirley Basin South Disposal Site

REPORT DATE: 9/15/2010

Location: 100-SC WELL

Parameter	Units	Sample Date	Sample ID	Depth:Range (Ft.BLS)	Result	Lab	Qualifiers Data	QA	Detection Limit	Uncertainty
Cadmium	mg/L	06/29/2010	N001	210 - 225	0.00013		FQ	#	0.000012	
Chloride	mg/L	06/29/2010	N001	210 - 225	120		FQ	#	4	
Chromium	mg/L	06/29/2010	N001	210 - 225	0.00051	U	FQ	#	0.00051	
Lead	mg/L	06/29/2010	N001	210 - 225	0.00012		FQ	#	0.0000068	
Nickel	mg/L	06/29/2010	N001	210 - 225	0.0038	B	FQ	#	0.00093	
Nitrate + Nitrite as Nitrogen	mg/L	06/29/2010	N001	210 - 225	0.01	U	FQ	#	0.01	
pH	s.u.	06/29/2010	N001	210 - 225	7.13		FQ	#		
Radium-226	pCi/L	06/29/2010	N001	210 - 225	3.37		FQJ	#	0.14	0.978
Radium-228	pCi/L	06/29/2010	N001	210 - 225	4.25		FQ	#	0.42	1.32
Selenium	mg/L	06/29/2010	N001	210 - 225	0.00015		FQ	#	0.000032	
Specific Conductance	umhos/cm	06/29/2010	N001	210 - 225	2334		FQ	#		
Sulfate	mg/L	06/29/2010	N001	210 - 225	1000		FQ	#	10	
Temperature	C	06/29/2010	N001	210 - 225	14.79		FQ	#		
Thorium-228	pCi/L	06/29/2010	N001	210 - 225	0.54	U	FQ	#	0.54	0.293
Thorium-230	pCi/L	06/29/2010	N001	210 - 225	0.69	U	FQ	#	0.69	0.416
Thorium-232	pCi/L	06/29/2010	N001	210 - 225	0.23	U	FQ	#	0.23	0.0878
Total Dissolved Solids	mg/L	06/29/2010	N001	210 - 225	1800		FQ	#	40	
Turbidity	NTU	06/29/2010	N001	210 - 225	3.46		FQ	#		
Uranium	mg/L	06/29/2010	N001	210 - 225	0.0038		FQ	#	0.0000029	

Groundwater Quality Data by Location (USEE100) FOR SITE SBS01, Shirley Basin South Disposal Site

REPORT DATE: 9/15/2010

Location: 102-SC WELL

Parameter	Units	Sample Date	Sample ID	Depth Range (Ft BLS)	Result	Qualifiers Lab	Data QA	Detection Limit	Uncertainty
Cadmium	mg/L	06/30/2010	0001	168.5 - 183.5	0.00034		#	0.000012	
Chloride	mg/L	06/30/2010	0001	168.5 - 183.5	260		#	4	
Chromium	mg/L	06/30/2010	0001	168.5 - 183.5	0.00051	U	#	0.00051	
Lead	mg/L	06/30/2010	0001	168.5 - 183.5	0.000053		#	0.0000068	
Nickel	mg/L	06/30/2010	0001	168.5 - 183.5	0.00093	U	#	0.00093	
Nitrate + Nitrite as Nitrogen	mg/L	06/30/2010	0001	168.5 - 183.5	1.2		#	0.01	
Oxidation Reduction Potential	mV	06/30/2010	N001	168.5 - 183.5	51.6		#		
pH	s.u.	06/30/2010	N001	168.5 - 183.5	7.86		#		
Radium-226	pCi/L	06/30/2010	0001	168.5 - 183.5	3.87		J #	0.15	1.11
Radium-228	pCi/L	06/30/2010	0001	168.5 - 183.5	3.32		#	0.49	1.07
Selenium	mg/L	06/30/2010	0001	168.5 - 183.5	0.0007		#	0.000032	
Specific Conductance	umhos/cm	06/30/2010	N001	168.5 - 183.5	2006		#		
Sulfate	mg/L	06/30/2010	0001	168.5 - 183.5	520		#	10	
Temperature	C	06/30/2010	N001	168.5 - 183.5	11.68		#		
Thorium-228	pCi/L	06/30/2010	0001	168.5 - 183.5	0.67	U	#	0.67	0.356
Thorium-230	pCi/L	06/30/2010	0001	168.5 - 183.5	0.78	U	#	0.78	0.377
Thorium-232	pCi/L	06/30/2010	0001	168.5 - 183.5	0.34	U	#	0.34	0.155
Total Dissolved Solids	mg/L	06/30/2010	0001	168.5 - 183.5	1300		#	40	
Turbidity	NTU	06/30/2010	N001	168.5 - 183.5	112		#		
Uranium	mg/L	06/30/2010	0001	168.5 - 183.5	0.0054		#	0.0000029	

Groundwater Quality Data by Location (USEE100) FOR SITE SBS01, Shirley Basin South Disposal Site

REPORT DATE: 9/15/2010

Location: 110-DC WELL

Parameter	Units	Sample Date	Sample ID	Depth Range (Ft BLS)	Result	Lab	Qualifiers Data	QA	Detection Limit	Uncertainty
Cadmium	mg/L	06/29/2010	N001	255 - 305	0.000012	U	F	#	0.000012	
Chloride	mg/L	06/29/2010	N001	255 - 305	220		F	#	4	
Chromium	mg/L	06/29/2010	N001	255 - 305	0.00051	U	F	#	0.00051	
Lead	mg/L	06/29/2010	N001	255 - 305	0.0033		F	#	0.0000068	
Nickel	mg/L	06/29/2010	N001	255 - 305	0.00093	U	F	#	0.00093	
Nitrate + Nitrite as Nitrogen	mg/L	06/29/2010	N001	255 - 305	0.01	U	F	#	0.01	
Oxidation Reduction Potential	mV	06/29/2010	N001	255 - 305	-24.3		F	#		
pH	s.u.	06/29/2010	N001	255 - 305	6.52		F	#		
Radium-226	pCi/L	06/29/2010	N001	255 - 305	134		FJ	#	0.14	33.8
Radium-228	pCi/L	06/29/2010	N001	255 - 305	6.4		F	#	0.5	1.96
Selenium	mg/L	06/29/2010	N001	255 - 305	0.000032	U	F	#	0.000032	
Specific Conductance	umhos/cm	06/29/2010	N001	255 - 305	3841		F	#		
Sulfate	mg/L	06/29/2010	N001	255 - 305	1900		F	#	25	
Temperature	C	06/29/2010	N001	255 - 305	17.2		F	#		
Thorium-228	pCi/L	06/29/2010	N001	255 - 305	0.74	U	F	#	0.74	0.443
Thorium-230	pCi/L	06/29/2010	N001	255 - 305	0.9	U	F	#	0.9	0.535
Thorium-232	pCi/L	06/29/2010	N001	255 - 305	0.19	U	F	#	0.19	0.113
Total Dissolved Solids	mg/L	06/29/2010	N001	255 - 305	3600		F	#	80	
Turbidity	NTU	06/29/2010	N001	255 - 305	5.35		F	#		
Uranium	mg/L	06/29/2010	N001	255 - 305	0.0087		F	#	0.0000029	

Groundwater Quality Data by Location (USEE100) FOR SITE SBS01, Shirley Basin South Disposal Site

REPORT DATE: 9/15/2010

Location: 112-DC WELL

Parameter	Units	Date	Sample ID	Depth Range (Ft-BLS)		Result	Lab.	Qualifiers Data	QA	Detection Limit	Uncertainty
Cadmium	mg/L	06/30/2010	N001	203	- 253	0.000034		F	#	0.000012	
Chloride	mg/L	06/30/2010	N001	203	- 253	53		F	#	4	
Chromium	mg/L	06/30/2010	N001	203	- 253	0.00051	U	F	#	0.00051	
Lead	mg/L	06/30/2010	N001	203	- 253	0.00028		F	#	0.0000068	
Nickel	mg/L	06/30/2010	N001	203	- 253	0.00093	U	F	#	0.00093	
Nitrate + Nitrite as Nitrogen	mg/L	06/30/2010	N001	203	- 253	0.01	U	F	#	0.01	
Oxidation Reduction Potential	mV	06/30/2010	N001	203	- 253	26.3		F	#		
pH	s.u.	06/30/2010	N001	203	- 253	7.13		F	#		
Radium-226	pCi/L	06/30/2010	N001	203	- 253	14.9		FJ	#	0.14	3.87
Radium-228	pCi/L	06/30/2010	N001	203	- 253	4.43		UF	#	0.55	1.4
Selenium	mg/L	06/30/2010	N001	203	- 253	0.000032	U	F	#	0.000032	
Specific Conductance	umhos/cm	06/30/2010	N001	203	- 253	2347		F	#		
Sulfate	mg/L	06/30/2010	N001	203	- 253	1200		F	#	10	
Temperature	C	06/30/2010	N001	203	- 253	12.23		F	#		
Thorium-228	pCi/L	06/30/2010	N001	203	- 253	0.584		FJ	#	0.5	0.361
Thorium-230	pCi/L	06/30/2010	N001	203	- 253	0.64	U	F	#	0.64	0.317
Thorium-232	pCi/L	06/30/2010	N001	203	- 253	0.0872		UF	#	0.059	0.0883
Total Dissolved Solids	mg/L	06/30/2010	N001	203	- 253	2000		F	#	40	
Turbidity	NTU	06/30/2010	N001	203	- 253	2.35		F	#		
Uranium	mg/L	06/30/2010	N001	203	- 253	0.043		F	#	0.0000029	

Groundwater Quality Data by Location (USEE100) FOR SITE SBS01, Shirley Basin South Disposal Site

REPORT DATE: 9/15/2010

Location: 113-DC WELL

Parameter	Units	Sample Date	Sample ID	Depth Range (Ft BLS)	Result	Qualifiers			Detection Limit	Uncertainty
						Lab	Data	QA		
Cadmium	mg/L	06/30/2010	0001	235 - 285	0.000012	U	F	#	0.000012	
Chloride	mg/L	06/30/2010	0001	235 - 285	8		F	#	2	
Chromium	mg/L	06/30/2010	0001	235 - 285	0.00051	U	F	#	0.00051	
Lead	mg/L	06/30/2010	0001	235 - 285	0.000092		F	#	0.0000068	
Nickel	mg/L	06/30/2010	0001	235 - 285	0.00093	U	F	#	0.00093	
Nitrate + Nitrite as Nitrogen	mg/L	06/30/2010	0001	235 - 285	0.063		F	#	0.01	
Oxidation Reduction Potential	mV	06/30/2010	N001	235 - 285	20.2		F	#		
pH	s.u.	06/30/2010	N001	235 - 285	7.48		F	#		
Radium-226	pCi/L	06/30/2010	0001	235 - 285	2.65		FJ	#	0.14	0.792
Radium-228	pCi/L	06/30/2010	0001	235 - 285	2.98		F	#	0.54	0.985
Selenium	mg/L	06/30/2010	0001	235 - 285	0.000032	U	F	#	0.000032	
Specific Conductance	umhos/cm	06/30/2010	N001	235 - 285	1514		F	#		
Sulfate	mg/L	06/30/2010	0001	235 - 285	640		F	#	5	
Temperature	C	06/30/2010	N001	235 - 285	12.36		F	#		
Thorium-228	pCi/L	06/30/2010	0001	235 - 285	0.52	U	F	#	0.52	0.258
Thorium-230	pCi/L	06/30/2010	0001	235 - 285	0.63	U	F	#	0.63	0.321
Thorium-232	pCi/L	06/30/2010	0001	235 - 285	0.16	U	F	#	0.16	0.0764
Total Dissolved Solids	mg/L	06/30/2010	0001	235 - 285	1100		F	#	20	
Turbidity	NTU	06/30/2010	N001	235 - 285	13.7		F	#		
Uranium	mg/L	06/30/2010	0001	235 - 285	0.0012		F	#	0.0000029	

Groundwater Quality Data by Location (USEE100) FOR SITE SBS01, Shirley Basin South Disposal Site

REPORT DATE: 9/15/2010

Location: 19-DC WELL

Parameter	Units	Sample Date	Sample ID	Depth Range (Ft BLS)	Result	Qualifiers		Detection Limit	Uncertainty
						Lab	Data QA		
Cadmium	mg/L	06/30/2010	N001	177 - 237	0.00063		F #	0.000012	
Chloride	mg/L	06/30/2010	N001	177 - 237	82		F #	10	
Chromium	mg/L	06/30/2010	N001	177 - 237	0.00051	U	F #	0.00051	
Lead	mg/L	06/30/2010	N001	177 - 237	0.0000068	U	F #	0.0000068	
Nickel	mg/L	06/30/2010	N001	177 - 237	0.11		F #	0.00093	
Nitrate + Nitrite as Nitrogen	mg/L	06/30/2010	N001	177 - 237	0.01	U	F #	0.01	
Oxidation Reduction Potential	mV	06/30/2010	N001	177 - 237	-83.3		F #		
pH	s.u.	06/30/2010	N001	177 - 237	6.55		F #		
Radium-226	pCi/L	06/30/2010	N001	177 - 237	6.51		FJ #	0.13	1.77
Radium-228	pCi/L	06/30/2010	N001	177 - 237	6.34		F #	0.47	1.94
Selenium	mg/L	06/30/2010	N001	177 - 237	0.00016		F #	0.000032	
Specific Conductance	umhos/cm	06/30/2010	N001	177 - 237	4503		F #		
Sulfate	mg/L	06/30/2010	N001	177 - 237	3000		F #	25	
Temperature	C	06/30/2010	N001	177 - 237	12.9		F #		
Thorium-228	pCi/L	06/30/2010	N001	177 - 237	0.61	U	F #	0.61	0.34
Thorium-230	pCi/L	06/30/2010	N001	177 - 237	0.67	U	F #	0.67	0.34
Thorium-232	pCi/L	06/30/2010	N001	177 - 237	0.16	U	F #	0.16	0.0858
Total Dissolved Solids	mg/L	06/30/2010	N001	177 - 237	4600		F #	80	
Turbidity	NTU	06/30/2010	N001	177 - 237	2.89		F #		
Uranium	mg/L	06/30/2010	N001	177 - 237	0.00018		F #	0.0000029	

Groundwater Quality Data by Location (USEE100) FOR SITE SBS01, Shirley Basin South Disposal Site

REPORT DATE: 9/15/2010

Location: 40-SC WELL

Parameter	Units	Sample Date	Sample ID	Depth Range (Ft BLS)	Result	Lab	Qualifiers Data	QA	Detection Limit	Uncertainty
Cadmium	mg/L	06/30/2010	N001	-	0.000075		FJ	#	0.000012	
Cadmium	mg/L	06/30/2010	N002	-	0.00022		FJ	#	0.000012	
Chloride	mg/L	06/30/2010	N001	-	42		F	#	4	
Chloride	mg/L	06/30/2010	N002	-	41		F	#	4	
Chromium	mg/L	06/30/2010	N001	-	0.00051	U	F	#	0.00051	
Chromium	mg/L	06/30/2010	N002	-	0.00051	U	F	#	0.00051	
Lead	mg/L	06/30/2010	N001	-	0.000068		F	#	0.000068	
Lead	mg/L	06/30/2010	N002	-	0.000068	U	F	#	0.000068	
Nickel	mg/L	06/30/2010	N001	-	0.0069		F	#	0.00093	
Nickel	mg/L	06/30/2010	N002	-	0.0082		F	#	0.00093	
Nitrate + Nitrite as Nitrogen	mg/L	06/30/2010	N001	-	1.5		F	#	0.01	
Nitrate + Nitrite as Nitrogen	mg/L	06/30/2010	N002	-	1.5		F	#	0.01	
Oxidation Reduction Potential	mV	06/30/2010	N001	-	65.2		F	#		
pH	s.u.	06/30/2010	N001	-	6.42		F	#		
Radium-226	pCi/L	06/30/2010	N001	-	0.185		FJ	#	0.13	0.136
Radium-226	pCi/L	06/30/2010	N002	-	0.414		FJ	#	0.16	0.217
Radium-228	pCi/L	06/30/2010	N001	-	1.03		UF	#	0.46	0.438
Radium-228	pCi/L	06/30/2010	N002	-	0.959		UF	#	0.49	0.432
Selenium	mg/L	06/30/2010	N001	-	0.0069		F	#	0.000032	
Selenium	mg/L	06/30/2010	N002	-	0.007		F	#	0.000032	

Groundwater Quality Data by Location (USEE100) FOR SITE SBS01, Shirley Basin South Disposal Site

REPORT DATE: 9/15/2010

Location: 40-SC WELL

Parameter	Units	Sample Date	Sample ID	Depth Range (Ft BLS)	Result	Lab	Qualifiers Data	QA	Detection Limit	Uncertainty
Specific Conductance	umhos /cm	06/30/2010	N001	-	2836		F	#		
Sulfate	mg/L	06/30/2010	N001	-	1700		F	#	10	
Sulfate	mg/L	06/30/2010	N002	-	1700		F	#	10	
Temperature	C	06/30/2010	N001	-	6.94		F	#		
Thorium-228	pCi/L	06/30/2010	N001	-	0.86	U	F	#	0.86	0.451
Thorium-228	pCi/L	06/30/2010	N002	-	0.36	U	F	#	0.36	0.165
Thorium-230	pCi/L	06/30/2010	N001	-	0.91	U	F	#	0.91	0.508
Thorium-230	pCi/L	06/30/2010	N002	-	0.67	U	F	#	0.67	0.432
Thorium-232	pCi/L	06/30/2010	N001	-	0.27	U	F	#	0.27	0.148
Thorium-232	pCi/L	06/30/2010	N002	-	0.14	U	F	#	0.14	0.0868
Total Dissolved Solids	mg/L	06/30/2010	N001	-	2600		F	#	40	
Total Dissolved Solids	mg/L	06/30/2010	N002	-	2600		F	#	40	
Turbidity	NTU	06/30/2010	N001	-	1.45		F	#		
Uranium	mg/L	06/30/2010	N001	-	0.00025		F	#	0.0000029	
Uranium	mg/L	06/30/2010	N002	-	0.00026		F	#	0.0000029	

Groundwater Quality Data by Location (USEE100) FOR SITE SBS01, Shirley Basin South Disposal Site

REPORT DATE: 9/15/2010

Location: 5-DC WELL

Parameter	Units	Sample Date	Sample ID	Depth Range (Ft BLS)	Result	Lab	Qualifiers Data	QA	Detection Limit	Uncertainty
Cadmium	mg/L	06/30/2010	N001	-	0.000058	U	F	#	0.000058	
Chloride	mg/L	06/30/2010	N001	-	170		F	#	10	
Chromium	mg/L	06/30/2010	N001	-	0.0045	B	F	#	0.00051	
Lead	mg/L	06/30/2010	N001	-	0.00028		F	#	0.000034	
Nickel	mg/L	06/30/2010	N001	-	0.9		F	#	0.00093	
Nitrate + Nitrite as Nitrogen	mg/L	06/30/2010	N001	-	0.027		F	#	0.01	
Oxidation Reduction Potential	mV	06/30/2010	N001	-	187.4		F	#		
pH	s.u.	06/30/2010	N001	-	4.27		F	#		
Radium-226	pCi/L	06/30/2010	N001	-	9.68		FJ	#	0.14	2.57
Radium-228	pCi/L	06/30/2010	N001	-	43.3		F	#	0.52	12.9
Selenium	mg/L	06/30/2010	N001	-	0.02		F	#	0.00016	
Specific Conductance	umhos/cm	06/30/2010	N001	-	7790		F	#		
Sulfate	mg/L	06/30/2010	N001	-	6300		F	#	50	
Temperature	C	06/30/2010	N001	-	13.04		F	#		
Thorium-228	pCi/L	06/30/2010	N001	-	5.83		FJ	#	0.53	1.24
Thorium-230	pCi/L	06/30/2010	N001	-	0.74	U	F	#	0.74	0.478
Thorium-232	pCi/L	06/30/2010	N001	-	0.625		F	#	0.2	0.283
Total Dissolved Solids	mg/L	06/30/2010	N001	-	9400		F	#	200	
Turbidity	NTU	06/30/2010	N001	-	9.6		F	#		
Uranium	mg/L	06/30/2010	N001	-	0.045		F	#	0.000015	

Groundwater Quality Data by Location (USEE100) FOR SITE SBS01, Shirley Basin South Disposal Site

REPORT DATE: 9/15/2010

Location: 5-SC WELL

Parameter	Units	Sample Date	Sample ID	Depth Range (Ft.BLS)		Result	Lab	Qualifiers Data	QA	Detection Limit	Uncertainty
Cadmium	mg/L	06/30/2010	N001	49.3	- 57.7	0.039		F	#	0.000058	
Chloride	mg/L	06/30/2010	N001	49.3	- 57.7	300		F	#	10	
Chromium	mg/L	06/30/2010	N001	49.3	- 57.7	0.26		F	#	0.00051	
Lead	mg/L	06/30/2010	N001	49.3	- 57.7	0.000034	U	F	#	0.000034	
Nickel	mg/L	06/30/2010	N001	49.3	- 57.7	2.5		F	#	0.00093	
Nitrate + Nitrite as Nitrogen	mg/L	06/30/2010	N001	49.3	- 57.7	0.01	U	F	#	0.01	
Oxidation Reduction Potential	mV	06/30/2010	N001	49.3	- 57.7	289.3		F	#		
pH	s.u.	06/30/2010	N001	49.3	- 57.7	3.39		F	#		
Radium-226	pCi/L	06/30/2010	N001	49.3	- 57.7	5.09		FJ	#	0.15	1.41
Radium-228	pCi/L	06/30/2010	N001	49.3	- 57.7	3.4		UF	#	0.52	1.09
Selenium	mg/L	06/30/2010	N001	49.3	- 57.7	0.073		F	#	0.00016	
Specific Conductance	umhos/cm	06/30/2010	N001	49.3	- 57.7	12176		F	#		
Sulfate	mg/L	06/30/2010	N001	49.3	- 57.7	14000		F	#	100	
Temperature	C	06/30/2010	N001	49.3	- 57.7	11.01		F	#		
Thorium-228	pCi/L	06/30/2010	N001	49.3	- 57.7	47.8		F	#	1.8	7.95
Thorium-230	pCi/L	06/30/2010	N001	49.3	- 57.7	421		F	#	2.8	64.4
Thorium-232	pCi/L	06/30/2010	N001	49.3	- 57.7	11.5		F	#	0.14	2.32
Total Dissolved Solids	mg/L	06/30/2010	N001	49.3	- 57.7	18000		F	#	200	
Turbidity	NTU	06/30/2010	N001	49.3	- 57.7	4.86		F	#		
Uranium	mg/L	06/30/2010	N001	49.3	- 57.7	3.4		F	#	0.000015	

Groundwater Quality Data by Location (USEE100) FOR SITE SBS01, Shirley Basin South Disposal Site

REPORT DATE: 9/15/2010

Location: 54-SC WELL

Parameter	Units	Sample Date	Sample ID	Depth Range (Ft BLS)	Result	Lab	Qualifiers Data	QA	Detection Limit	Uncertainty
Cadmium	mg/L	06/29/2010	N001	-	0.0017		FQ	#	0.000058	
Chloride	mg/L	06/29/2010	N001	-	340		FQ	#	10	
Chromium	mg/L	06/29/2010	N001	-	0.19		FQ	#	0.00051	
Lead	mg/L	06/29/2010	N001	-	0.00062		FQ	#	0.000034	
Nickel	mg/L	06/29/2010	N001	-	2.5		FQ	#	0.00093	
Nitrate + Nitrite as Nitrogen	mg/L	06/29/2010	N001	-	0.02		FQ	#	0.01	
Oxidation Reduction Potential	mV	06/29/2010	N001	-	305.2		FQ	#		
pH	s.u.	06/29/2010	N001	-	3.84		FQ	#		
Radium-226	pCi/L	06/29/2010	N001	-	16.7		FQJ	#	0.13	4.33
Radium-228	pCi/L	06/29/2010	N001	-	107		FQ	#	0.49	31.8
Selenium	mg/L	06/29/2010	N001	-	0.047		FQ	#	0.00016	
Specific Conductance	umhos/cm	06/29/2010	N001	-	9210		FQ	#		
Sulfate	mg/L	06/29/2010	N001	-	8400		FQ	#	50	
Temperature	C	06/29/2010	N001	-	17.97		FQ	#		
Thorium-228	pCi/L	06/29/2010	N001	-	8.97		FQ	#	0.73	1.71
Thorium-230	pCi/L	06/29/2010	N001	-	5.21		FQ	#	1.4	1.35
Thorium-232	pCi/L	06/29/2010	N001	-	4.45		FQ	#	0.35	0.964
Total Dissolved Solids	mg/L	06/29/2010	N001	-	12000		FQ	#	200	
Turbidity	NTU	06/29/2010	N001	-	7.65		FQ	#		
Uranium	mg/L	06/29/2010	N001	-	0.045		FQ	#	0.000015	

Groundwater Quality Data by Location (USEE100) FOR SITE SBS01, Shirley Basin South Disposal Site

REPORT DATE: 9/15/2010

Location: K.G.S.#3 WELL

Parameter	Units	Sample Date	Sample ID	Depth Range (Ft/BLS)	Result	Lab	Qualifiers Data	QA	Detection Limit	Uncertainty
Cadmium	mg/L	06/30/2010	N001	420 - 450	0.00027			#	0.000012	
Chloride	mg/L	06/30/2010	N001	420 - 450	24			#	1	
Chromium	mg/L	06/30/2010	N001	420 - 450	0.00051	U		#	0.00051	
Lead	mg/L	06/30/2010	N001	420 - 450	0.00059			#	0.0000068	
Nickel	mg/L	06/30/2010	N001	420 - 450	0.011			#	0.00093	
Nitrate + Nitrite as Nitrogen	mg/L	06/30/2010	N001	420 - 450	0.15			#	0.01	
Oxidation Reduction Potential	mV	06/30/2010	N001	420 - 450	-72.9			#		
pH	s.u.	06/30/2010	N001	420 - 450	7.62			#		
Radium-226	pCi/L	06/30/2010	N001	420 - 450	0.31		J	#	0.14	0.182
Radium-228	pCi/L	06/30/2010	N001	420 - 450	0.673		U	#	0.5	0.38
Selenium	mg/L	06/30/2010	N001	420 - 450	0.000032	U		#	0.000032	
Specific Conductance	umhos/cm	06/30/2010	N001	420 - 450	770			#		
Sulfate	mg/L	06/30/2010	N001	420 - 450	270			#	2.5	
Temperature	C	06/30/2010	N001	420 - 450	17.92			#		
Thorium-228	pCi/L	06/30/2010	N001	420 - 450	0.67	U		#	0.67	0.363
Thorium-230	pCi/L	06/30/2010	N001	420 - 450	0.78	U		#	0.78	0.406
Thorium-232	pCi/L	06/30/2010	N001	420 - 450	0.29	U		#	0.29	0.121
Total Dissolved Solids	mg/L	06/30/2010	N001	420 - 450	450			#	20	
Turbidity	NTU	06/30/2010	N001	420 - 450	7.84			#		
Uranium	mg/L	06/30/2010	N001	420 - 450	0.000033			#	0.0000029	

SAMPLE ID CODES: 000X = Filtered sample (0.45 µm). N00X = Unfiltered sample. X = replicate number.

LAB QUALIFIERS:

- * Replicate analysis not within control limits.
- > Result above upper detection limit.
- A TIC is a suspected aldol-condensation product.
- B Inorganic: Result is between the IDL and CRDL. Organic: Analyte also found in method blank.
- C Pesticide result confirmed by GC-MS.
- D Analyte determined in diluted sample.
- E Inorganic: Estimate value because of interference, see case narrative. Organic: Analyte exceeded calibration range of the GC-MS.
- H Holding time expired, value suspect.
- I Increased detection limit due to required dilution.
- J Estimated
- N Inorganic or radiochemical: Spike sample recovery not within control limits. Organic: Tentatively identified compound (TIC).
- P > 25% difference in detected pesticide or Aroclor concentrations between 2 columns.
- U Analytical result below detection limit.
- W Post-digestion spike outside control limits while sample absorbance < 50% of analytical spike absorbance.
- X,Y,Z Laboratory defined qualifier, see case narrative.

DATA QUALIFIERS:

- | | | | | | |
|---|--|---|---|---|------------------|
| F | Low flow sampling method used. | G | Possible grout contamination, pH > 9. | J | Estimated value. |
| L | Less than 3 bore volumes purged prior to sampling. | Q | Qualitative result due to sampling technique. | R | Unusable result. |
| U | Parameter analyzed for but was not detected. | X | Location is undefined. | | |

QA QUALIFIER:

- # Validated according to quality assurance guidelines.

Static Water Level Data

This page intentionally left blank

STATIC WATER LEVELS (USEE700) FOR SITE SBS01, Shirley Basin South Disposal Site
 REPORT DATE: 9/15/2010

Location Code	Flow Code	Top of Casing Elevation (Ft)	Measurement Date	Measurement Time	Depth From Top of Casing (Ft)	Water Elevation (Ft)
10-DC		7113.1	06/30/2010	17:35:51	170.43	6942.67
100-SC		7153.56	06/29/2010	11:45:40	216.9	6936.66
102-SC		7126.74	06/30/2010	12:15:38	183.8	6942.94
110-DC		7153.92	06/29/2010	11:30:11	211.47	6942.45
112-DC		7125.62	06/30/2010	12:00:36	182.83	6942.79
113-DC		7135.93	06/30/2010	13:30:06	191.14	6944.79
19-DC		7112.1	06/30/2010	15:25:46	169.48	6942.62
40-SC		7058.3	06/30/2010	18:35:44	8.72	7049.58
5-DC		7119.94	06/30/2010	10:40:13	177.56	6942.38
5-SC		7053.31	06/30/2010	16:25:38	56.96	6996.35
54-SC		7158.74	06/29/2010	15:55:22	208.54	6950.2
K.G.S.#3		7171.3	06/30/2010	14:00:26	123.4	7047.9


FLOW CODES: B BACKGROUND C CROSS GRADIENT D DOWN GRADIENT F OFF SITE
 N UNKNOWN O ON SITE U UPGRADIENT

This page intentionally left blank


Time-Concentration Graphs

This page intentionally left blank


**Shirley Basin South Disposal Site
Cadmium Concentration**
Alternate Concentration Limit (ACL) = 0.079 mg/L

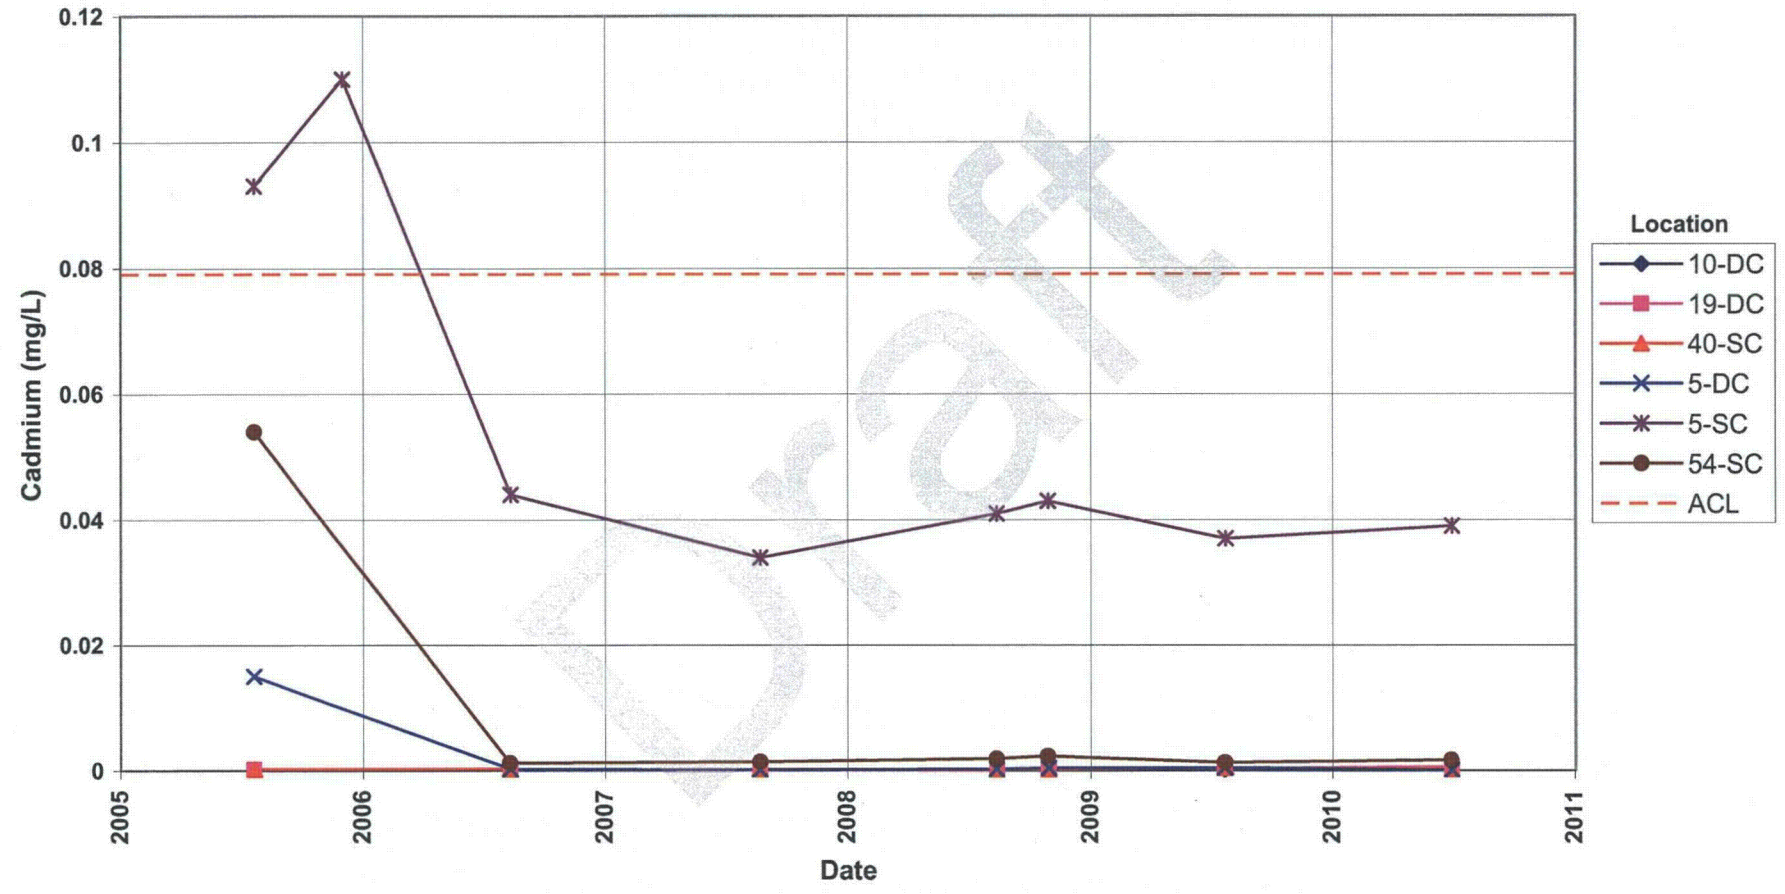

**Shirley Basin South Disposal Site
Chromium Concentration**
Alternate Concentration Limit (ACL) = 1.83 mg/L

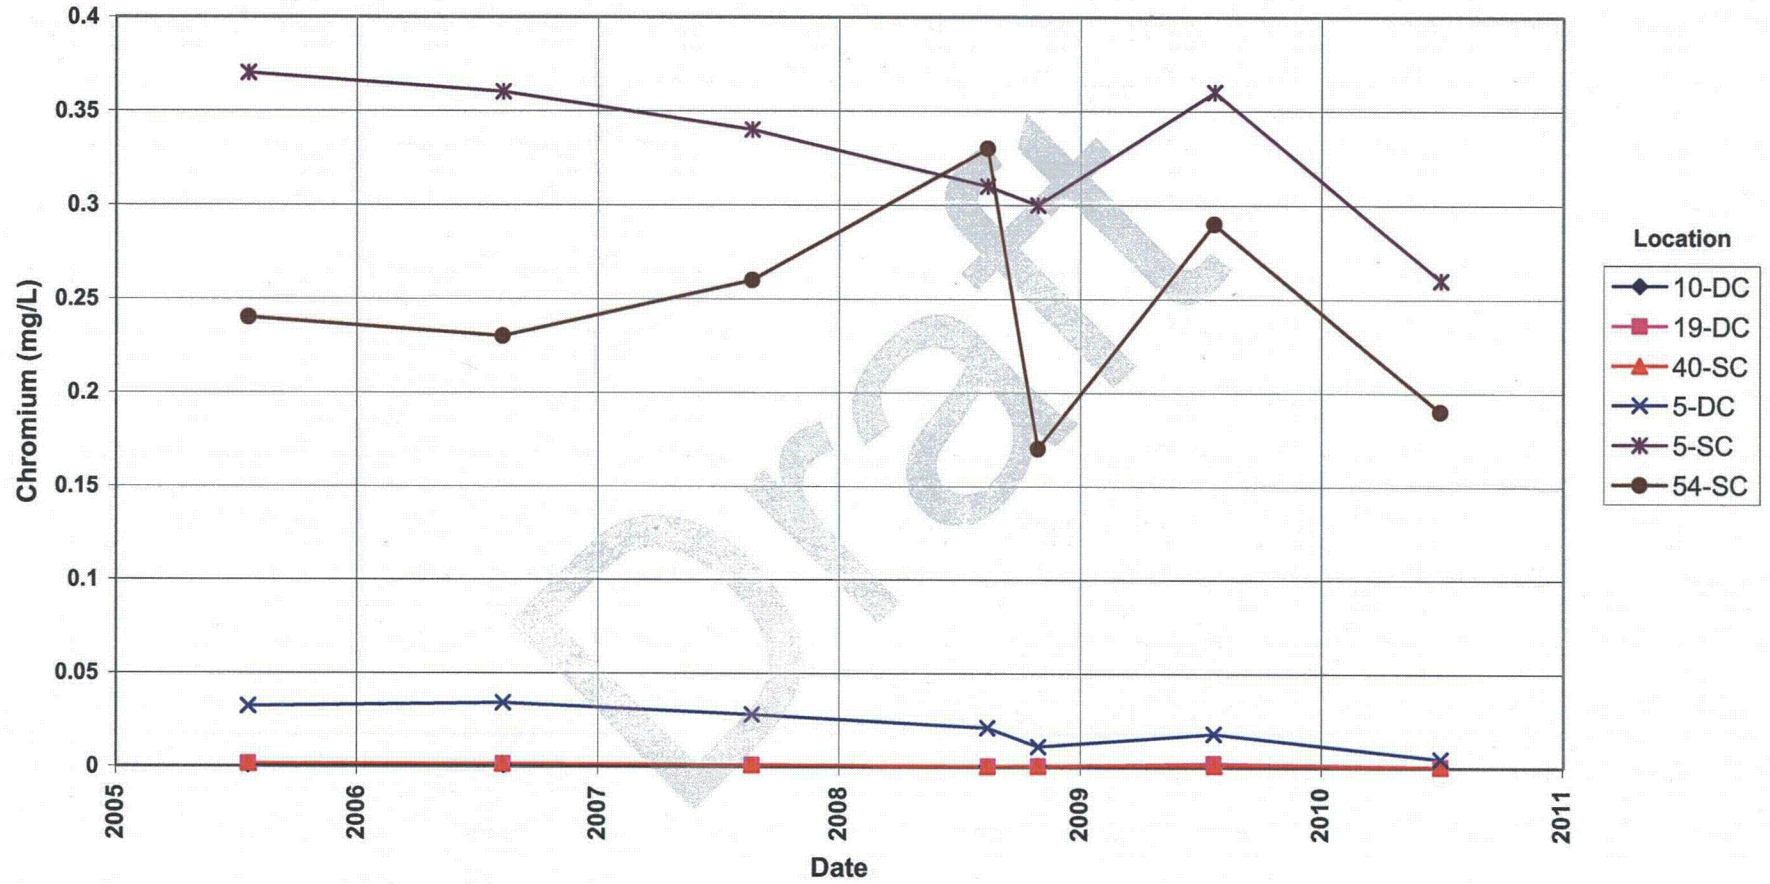


Shirley Basin South Disposal Site
Lead Concentration
Alternate Concentration Limit (ACL) = 0.05 mg/L

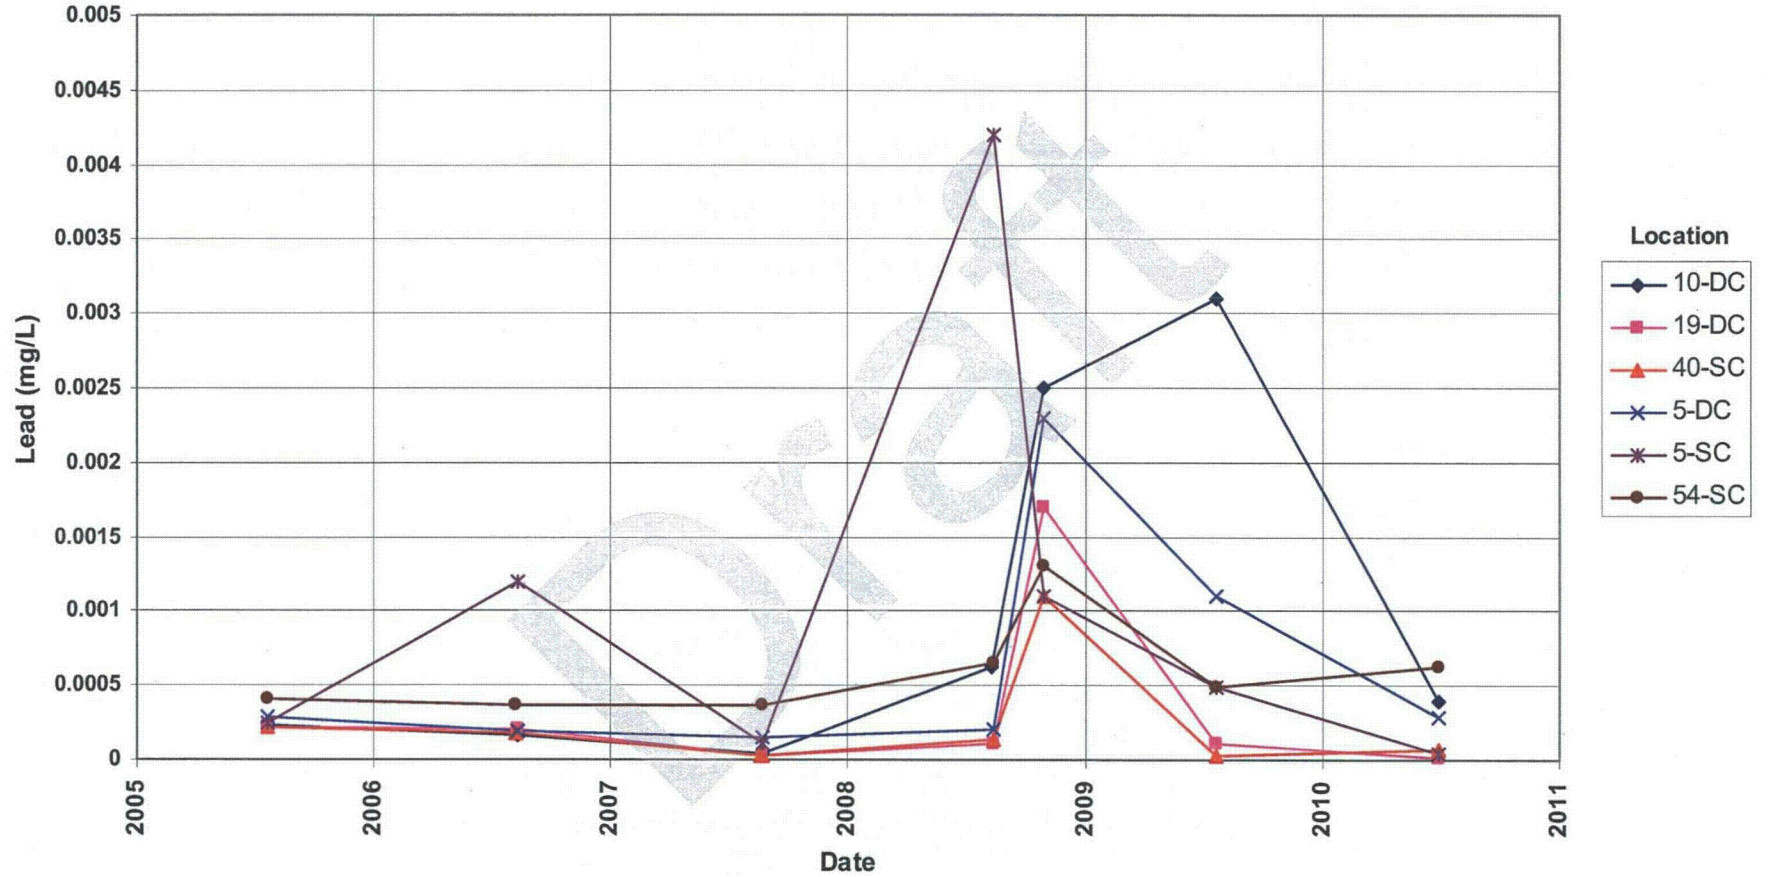


Shirley Basin South Disposal Site Nickel Concentration


Alternate Concentration Limit (ACL) = 6.15 mg/L

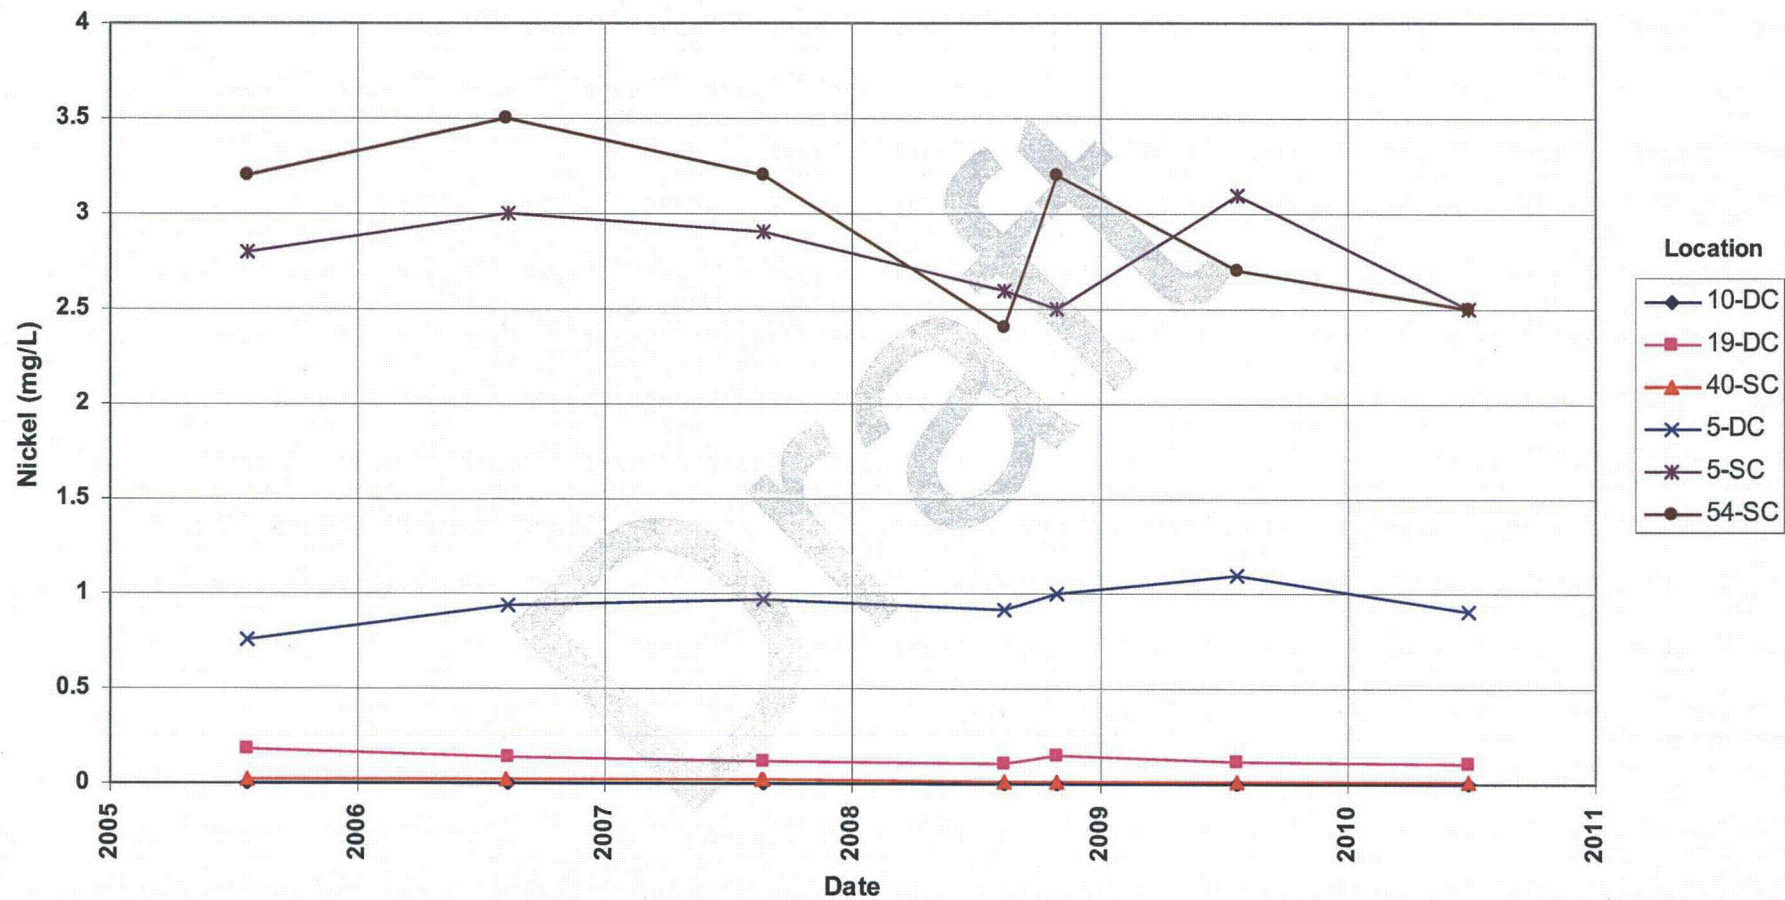


Shirley Basin South Disposal Site
Radium-226 Concentration
 Alternate Concentration Limit (ACL) = 91.3 pCi/L

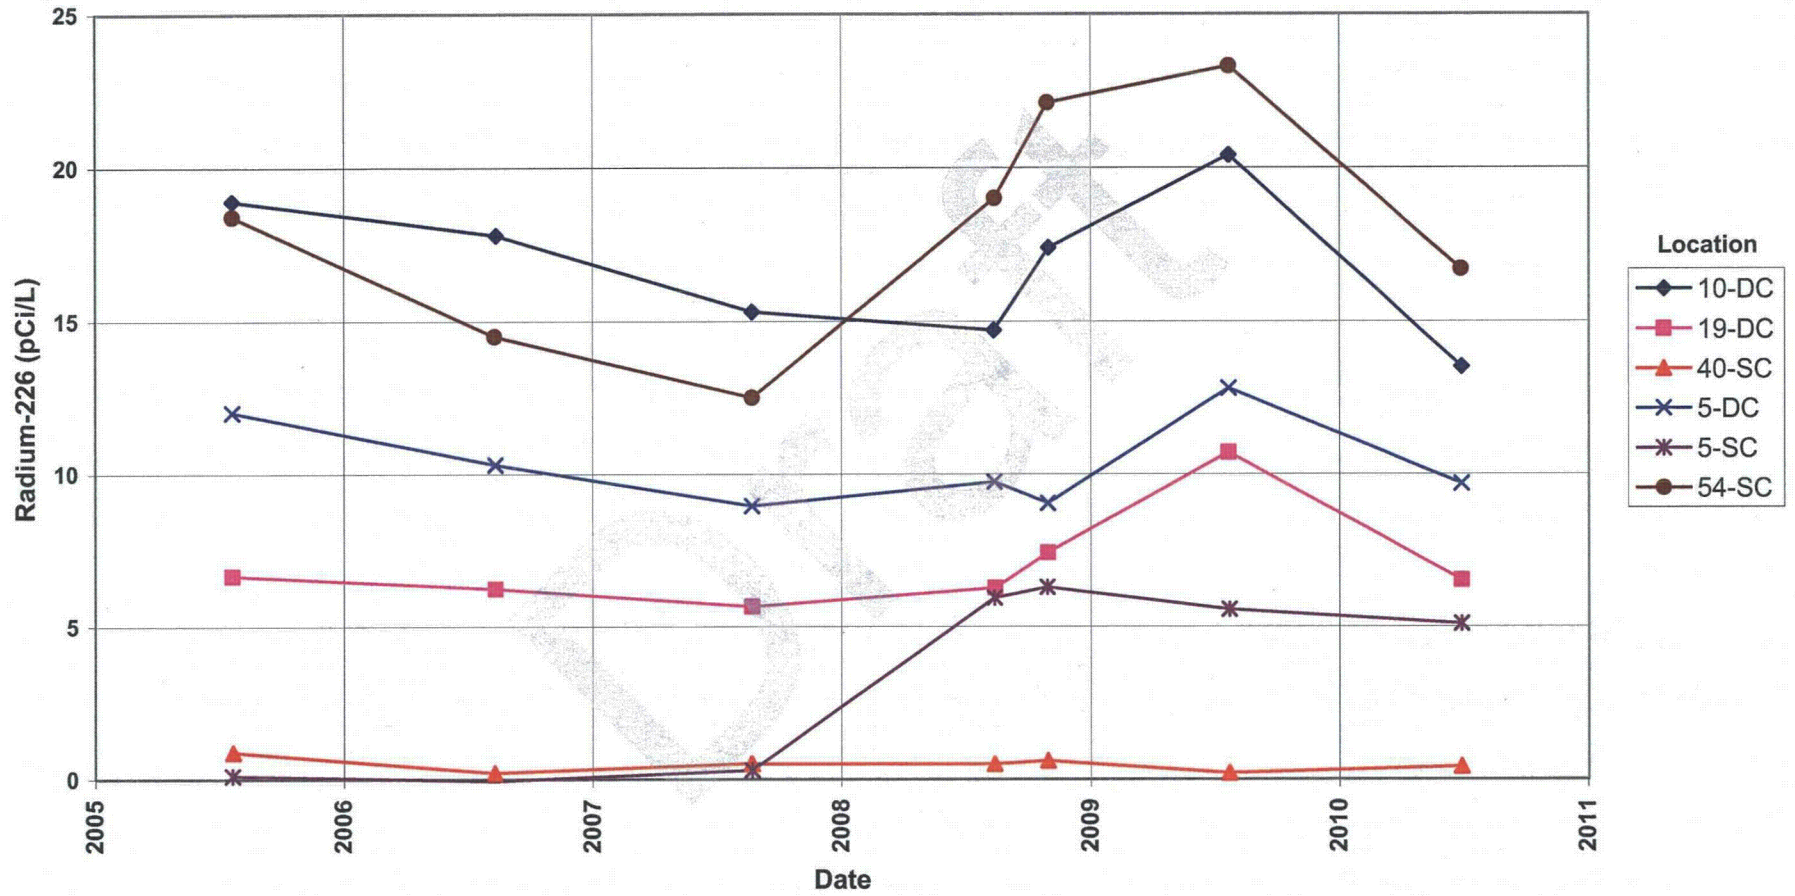


Shirley Basin South Disposal Site
Radium-228 Concentration
Alternate Concentration Limit (ACL) = 25.7 pCi/L

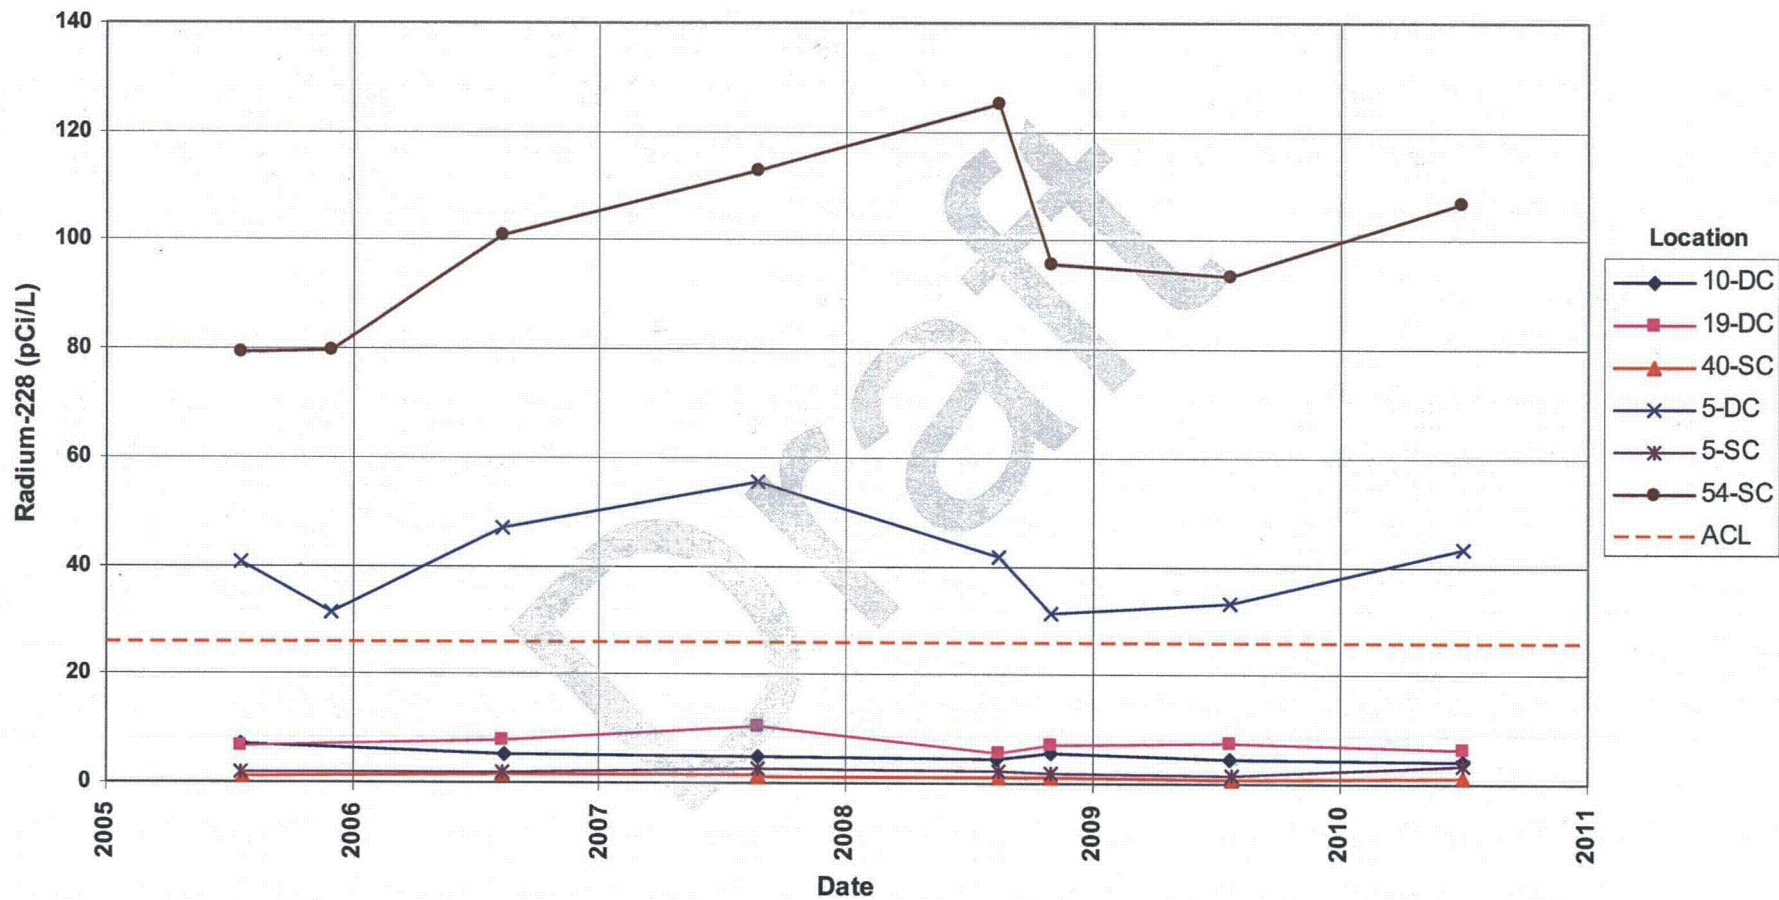


Shirley Basin South Disposal Site
Selenium Concentration
Alternate Concentration Limit (ACL) = 0.12 mg/L

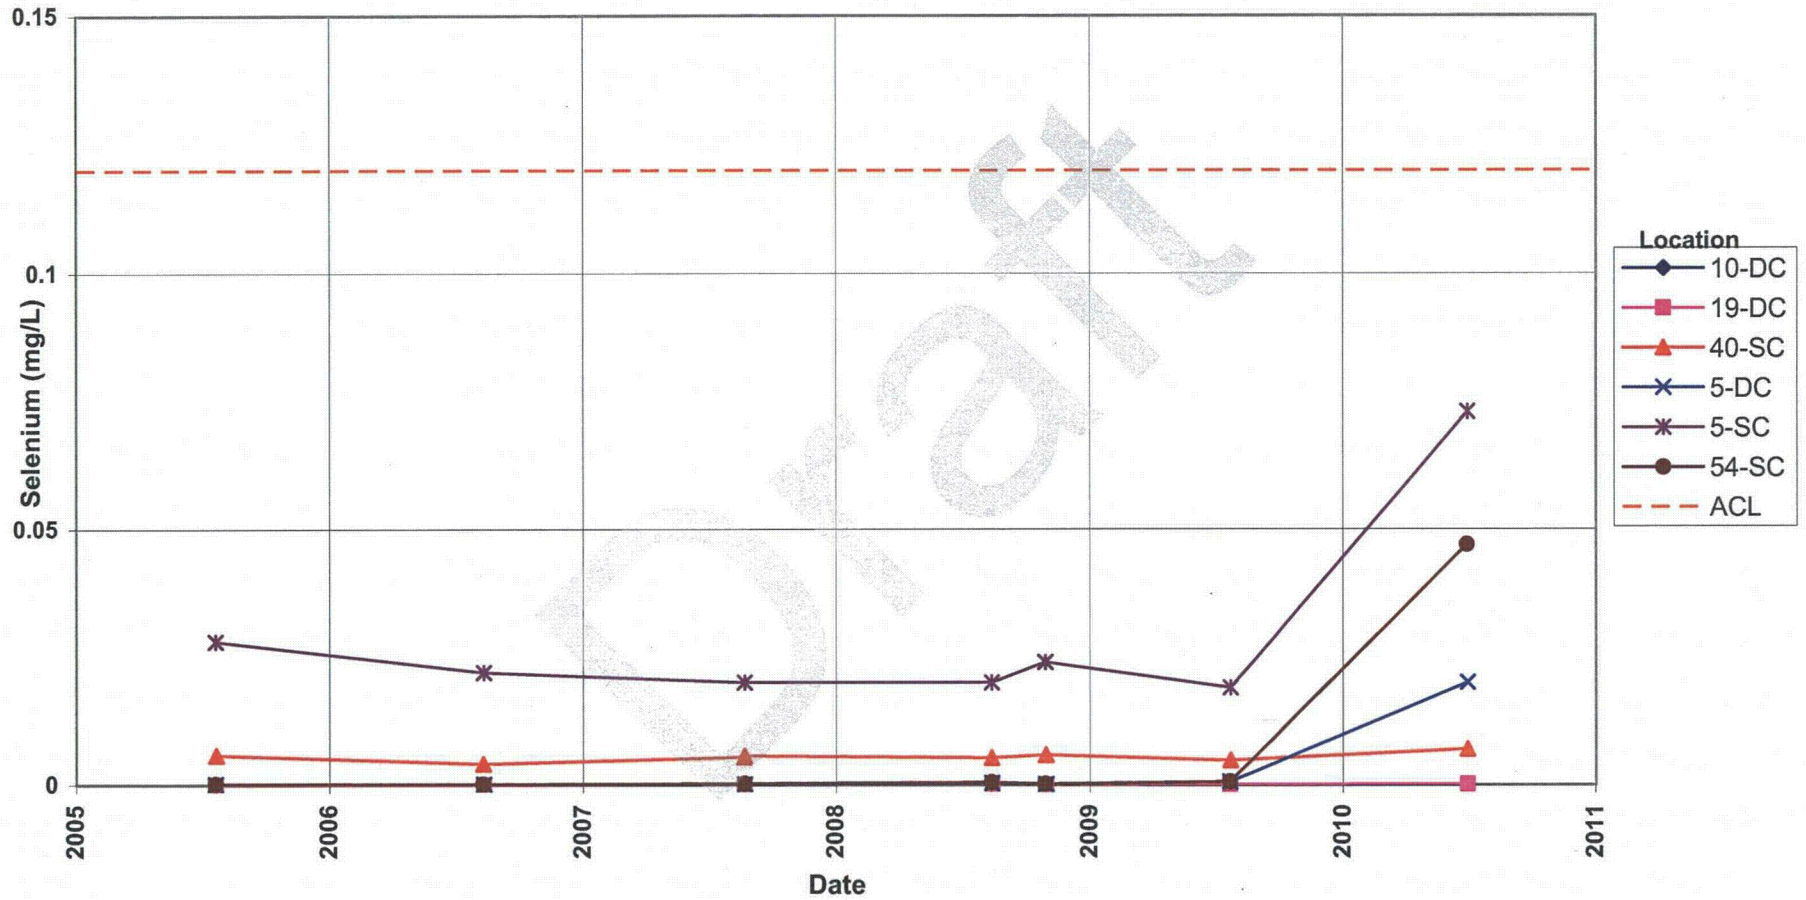

Shirley Basin South Disposal Site
Thorium-230 Concentration
Alternate Concentration Limit (ACL) = 2,409 pCi/L

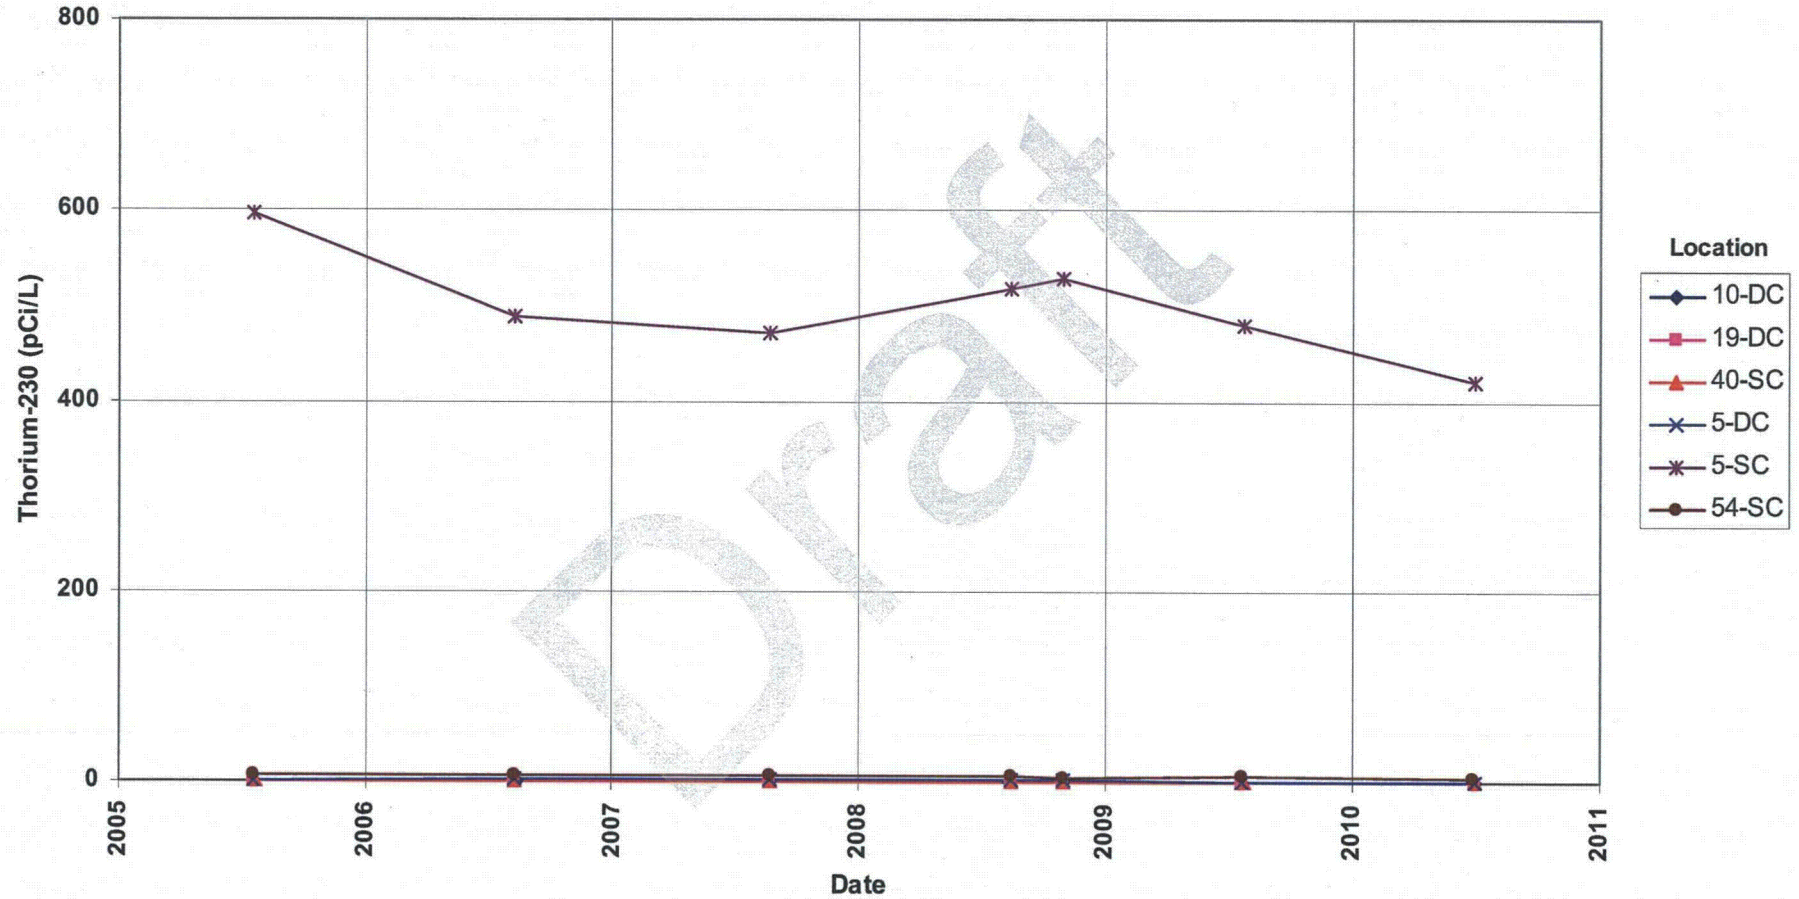

Shirley Basin South Disposal Site
Uranium Concentration
Alternate Concentration Limit (ACL) = 9.2 mg/L

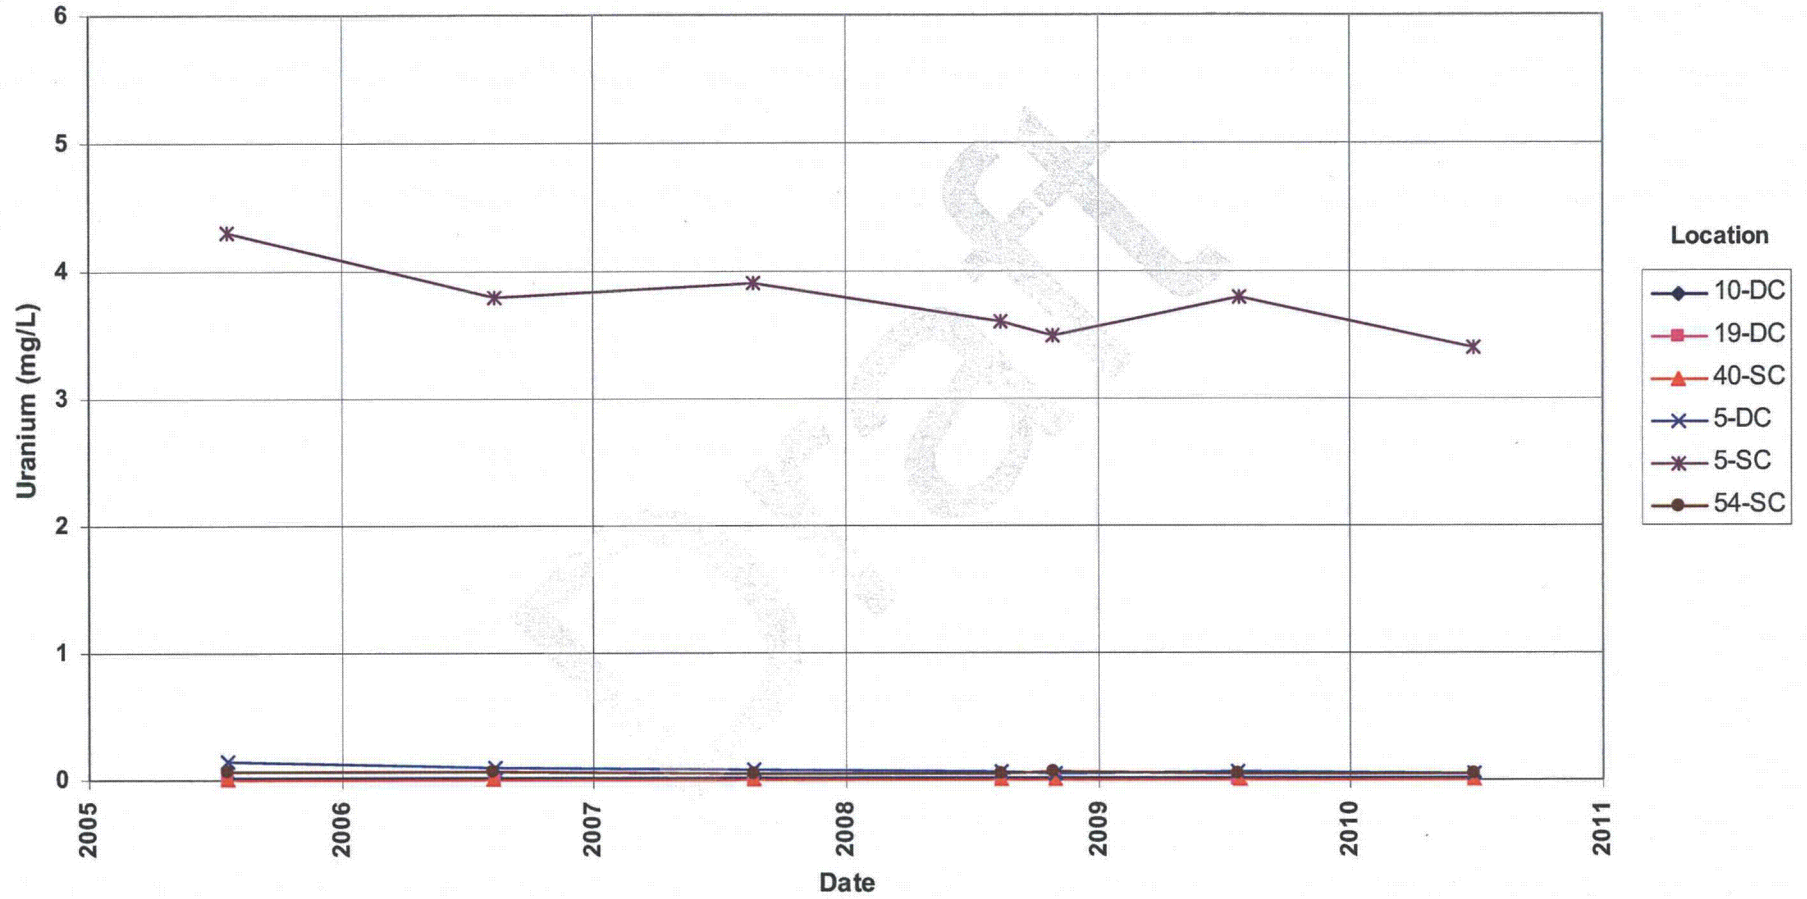

This page intentionally left blank

Attachment 3
Sampling and Analysis Work Order

DRAFT

Draft

This page intentionally left blank

May 10, 2010

U.S. Department of Energy
Office of Legacy Management
ATTN: Scott R. Surovchak
Site Manager
11025 Dover St., Ste. 1000
Westminster, CO 80021-5573

SUBJECT: Contract No. DE-AM01-07LM00060, Stoller
June 2010 Environmental Sampling at Shirley Basin South, Wyoming

REFERENCE: Task Order LM00-501-03-223-402, Shirley Basin South, WY, Site.

Dear Mr. Surovchak:

The purpose of this letter is to inform you of the upcoming sampling event at Shirley Basin South, Wyoming. Enclosed are the map and tables specifying sample locations and analytes for monitoring at the Shirley Basin South disposal site. Water quality data will be collected from monitoring wells at this site as part of the routine environmental sampling currently scheduled to begin the week of June 14, 2010.

The following list shows the monitoring wells scheduled to be sampled during this event.

Monitoring Wells*

40-SC	51-SC	10-DC	5-DC	19-DC	5-SC	54-SC
100-SC	101-SC	102-SC	110-DC	112-DC	113-DC	K.G.S.#3


*NOTE: SC wells are completed in the upper sand aquifer of the Wind River Formation; DC wells are completed in the main sand aquifer of the Wind River Formation. Well 54-SC is completed in both aquifers.

All samples will be collected as directed in the *Sampling and Analysis Plan for U.S. Department of Energy Office of Legacy Management Sites*. Access agreements are being reviewed and are expected to be complete by the beginning of fieldwork.

Scott R. Surovchak
Control Number 10-0598
Page 2

Please contact me at (970) 248-6022 if you have any questions or concerns.

Sincerely,

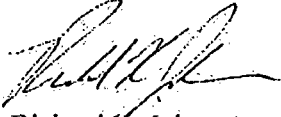

Richard K. Johnson
Site Lead

RKJ/lcg/lb

Enclosures (3)

cc: (electronic)
Cheri Bahrke, Stoller
Steve Donovan, Stoller
Bev Gallagher, Stoller
Lauren Goodknight, Stoller
Richard Johnson, Stoller
EDD Delivery
rc-grand.junction

Draft

Sampling Frequencies for Locations at Shirley Basin South, Wyoming

Location ID	Quarterly	Semiannually	Annually	Biennially	Not Sampled	Notes
Monitoring Wells						
100-SC			X			
101-SC			X			
102-SC			X			
110-DC			X			
112-DC			X			
113-DC			X			
40-SC			X			
5-SC			X			
51-SC			X			
54-SC			X			
10-DC			X			
5-DC			X			
19-DC			X			
K.G.S.#3			X			

Sampling conducted in June

DRAFT

Constituent Sampling Breakdown

Site	Shirley Basin South		Required Detection Limit (mg/L)	Analytical Method	Line Item Code
Analyte	Groundwater	Surface Water			
Approx. No. Samples/yr	14	0			
<i>Field Measurements</i>					
Alkalinity					
Dissolved Oxygen					
Redox Potential	X				
pH	X				
Specific Conductance	X				
Turbidity	X				
Temperature	X				
<i>Laboratory Measurements</i>					
Aluminum					
Ammonia as N (NH3-N)					
Cadmium	X		0.001	SW-846 6020	LMM-02
Calcium					
Chloride	X		0.5	SW-846 9056	MIS-A-039
Chromium	X		0.005	SW-846 6010	LMM-01
Gross Alpha					
Gross Beta					
Iron					
Lead	X		0.002	SW-846 6020	LMM-02
Magnesium					
Manganese					
Molybdenum					
Nickel	X		0.02	SW-846 6010	LMM-01
Nickel-63					
Nitrate + Nitrite as N (NO3+NO2)-N	X		0.05	EPA 353.1	WCH-A-022
Potassium					
Radium-226	X		1 pCi/L	Gas Proportional Counter	GPC-A-018
Radium-228	X		1 pCi/L	Gas Proportional Counter	GPC-A-020
Selenium	X		0.0001	SW-846 6020	LMM-02
Silica					
Sodium					
Strontium					
Sulfate	X		0.5	SW-846 9056	MIS-A-044
Sulfide					
Thorium-230	X		1 pCi/L	Alpha Spectrometry	ASP-A-008
Total Dissolved Solids	X		10	SM2540 C	WCH-A-033
Total Organic Carbon					
Uranium	X		0.0001	SW-846 6020	LMM-02
Vanadium					
Zinc					
Total No. of Analytes	13	0			

Note: All analyte samples are considered unfiltered unless stated otherwise. All private well samples are to be unfiltered. The total number of analytes does not include field parameters.

**Attachment 4
Trip Report**

Draft

Draft

This page intentionally left blank

Memorandum

Control Number N/A

DATE: July 14, 2010

TO: Dick Johnson

FROM: Dan Sellers

SUBJECT: Trip Report

Site: Shirley Basin South, Wyoming, Disposal Site

Dates of Sampling Event: June 28 thru July 1, 2010.

Team Members: David Atkinson and Dan Sellers.

Number of Locations Sampled: 12 wells were sampled for metals (Cd, Cr, Pb, Ni, Se, U), Th-230, Ra-226/228, TDS, nitrites/nitrates, and anions (Cl, SO4). In addition, one duplicate sample was collected for QA/QC purposes.

Locations Not Sampled/Reason: Well 101-SC was dry and well 51-SC had insufficient water.

Well Development Information: N/A

Field Variance: Could not reach turbidity of <10 NTUs at well 113-DC. Turbidity was within 10 percent over three readings and samples were filtered. Wells K.G.S. #3 and 102-SC were sampled using a bailer. Samples collected from 102-SC were filtered but no filter was required for K.G.S. #3. Bladder pump in K.G.S. #3 was unable to pump water to the surface. Replaced with two different pumps and had no success.

Location Specific Information: There were black specks and the water smelled of sulfur in well K.G.S. #3.

Quality Control Sample Cross Reference: The following is the false identification assigned to the quality control sample:

False Id	True Id	Sample Type	Associated Matrix	Ticket Number
2940	40-SC	Duplicate	Groundwater	IHV 353

Requisition Numbers Assigned: All samples were assigned to RIN 10063127.

Sample Shipment: Samples were delivered to ALS Laboratory Group on July 1, 2010.

Water Level Measurements: Water levels were measured at all wells.

Well Inspection Summary: All wells were in good condition and properly labeled. The total depth (TD) of well 51-SC was measured and needs to be changed in the database. The measured TD is 102.2 feet from top of casing (TOC). Development of this well last year was not successful and has not produced sufficient amount of water for many years.

Equipment: 10 wells were sampled using the low-flow procedure; 9 wells were sampled through the use of a dedicated bladder pump and dedicated tubing and, 1 well was sampled using a peristaltic pump and dedicated tubing. Two wells were sampled using a bailer (K.G.S. #3 and 102-SC).

All equipment functioned properly except for the bladder pump in well K.G.S. #3. Well 102-SC has no bladder pump or tubing and is considered a Category IV well and will be bailed in the future. Samples were filtered for 102-SC but not required for K.G.S. #3.

Institutional Controls: All gates were closed and locked during the sampling event.

Fences, Gates, Locks: OK.

Signs: No missing or vandalized signs were observed.

Trespassing/Site Disturbances: N/A.

Site Issues

Disposal Cell/Drainage Structure Integrity: No problems observed.

Vegetation/Noxious Weed Concerns: The revegetation work on the access roads and the disturbed areas around the newer well pads appears to be a success.

Maintenance Requirements: None observed.

Safety Issues: None.

Corrective Action Taken: Replace tubing and pump at K.G.S. #3 at next sampling event.

DLS/lcg

cc: (electronic)
Scott Surovchak, DOE
Cheri Bahrke, Stoller
Steve Donovan, Stoller
EDD Delivery