

NUREG-0837
Vol. 13, No. 4

NRC TLD Direct Radiation Monitoring Network

Progress Report
October–December 1995

U.S. Nuclear Regulatory Commission

NRC Region I

R. Struckmeyer



9404060261 940331
PDR NUREG
0837 R PDR

Available from

Superintendent of Documents
U.S. Government Printing Office
Mail Stop SSOP
Washington, DC 20402-9328

A year's subscription consists of 4 issues for
this publication.

Single copies of this publication
are available from
National Technical Information Service
Springfield, VA 22161

NUREG-0837
Vol. 13, No. 4

NRC TLD Direct Radiation Monitoring Network

Progress Report
October–December 1993

Manuscript Completed: March 1994
Date Published: March 1994

R. Struckmeyer

Region I
U.S. Nuclear Regulatory Commission
King of Prussia, PA 19406



ABSTRACT

This report presents the results of the NRC Direct Radiation Monitoring Network for the fourth quarter of 1993. It provides the ambient radiation levels measured in the vicinity of 75 sites throughout the United States. In addition, it describes the equipment used, monitoring station selection criteria, characterization of the dosimeter response, calibration procedures, statistical methods, intercomparison, and quality assurance program.

CONTENTS

	<u>Page</u>
ABSTRACT	iii
SUMMARY	1
1. INTRODUCTION	4
2. DOSIMETER SITE SELECTION CRITERIA	5
2.1 TLD Network Stations Within Five Miles of the Plant Site	5
2.2 TLD Network Stations Beyond Five Miles of the Plant Site	5
2.3 Collocated TLD Stations	5
2.4 Emergency TLD Placement	5
3. EQUIPMENT AND GENERAL PROCEDURES	7
3.1 Dosimetry System	7
3.2 Field Container	8
3.3 Exchange Procedures	8
4. CALIBRATION	12
4.1 Facilities	12
4.2 Procedures for Calibrating Dosimeters	12
5. ESTIMATION OF TRANSIT EXPOSURE	13
6. STATISTICAL METHODS	15
7. QUALITY ASSURANCE PROGRAM	18
7.1 Dosimeter Quality Control	18
7.2 Reader Quality Control	18
7.3 Quality Assurance Audits	19
8. INTERCOMPARISON	20
8.1 Description	20
8.2 Results	20
8.3 Discussion	20
9. SUMMARY OF OPERATING EXPERIENCES	21
10. ENVIRONMENTAL DIRECT RADIATION MONITORING DATA FOR NRC LICENSED NUCLEAR POWER REACTORS	23

CONTENTS (Continued)

Page

LIST OF FIGURES

1.	Illustrations of Dosimeter Placement	6
2.	TLD Badge Construction	10
3.	TLD Reader - Reading Method and Construction	11

LIST OF TABLES

1.	Standard Windrose Sectors Used in Selecting TLD Station Locations	3
2.	Calcium Sulfate Energy Response	9
3.	Control Dosimeter Summary	14
4.	Sites Monitored During Fourth Quarter, 1993	22

SUMMARY

The U.S. Nuclear Regulatory Commission (NRC) Direct Radiation Monitoring Network is operated by the NRC in cooperation with participating states to provide continuous measurement of the ambient radiation levels around licensed NRC facilities, primarily power reactors. Ambient radiation levels result from naturally occurring radionuclides present in the soil, cosmic radiation constantly bombarding the earth from outer space, and the contribution, if any, from the monitored facilities and other man-made sources. The Network is intended to measure radiation levels during routine facility operations and to establish background radiation levels used to assess the radiological impact of an unusual condition, such as an accident.

This report describes the program objectives, scope, and methodology of the monitoring program and presents the radiation levels measured during the fourth quarter of 1993. (Radiation level measurements are made at NRC licensed nuclear facilities under construction, as well as those in operation.) In addition, it describes the equipment used, monitoring station selection criteria, and the quality assurance program.

All radiation measurements are made using small, passive detectors called thermoluminescent dosimeters (TLDs), which provide a quantitative measurement of the radiation levels in the area in which they are placed. The National Bureau of Standards (NBS)* has performed an independent study of the following characteristics of the NRC dosimetry system: energy response, angular dependence, temperature and humidity sensitivity, fading, light dependence, self-irradiation, and reproducibility. NBS has also tested the response of the NRC's dosimetry system against the requirements of ANSI N545-1975 and NRC Regulatory Guide 4.13. Details of this testing can be found in NUREG/CR-3775. Each site is monitored by arranging approximately 30 to 50 TLD stations in two concentric rings extending to about five miles from the facility. (Some sites have fewer than 30 TLDs due to their location next to large bodies of water.) All TLD stations are outside the site boundary of the facility.

Section 10 presents the radiation levels measured around the 75 facilities monitored by the Network during the fourth quarter of 1993. There are 72 different sets of dosimeters because, in some instances, two power reactor facilities are monitored by the same set of dosimeters (e.g., Keweenaw and Point Beach). The radiation levels are presented as gross and net exposures. The gross exposure includes naturally occurring background radiation and the exposure received during transport and storage of the TLD. The gross exposure may also include radiation resulting from a facility's operation. Net exposures are obtained by subtracting an estimate of the exposure during transit from the gross exposure recorded by the dosimeter. All exposures are normalized to a 90-day quarter ("standard quarter") and reported in units of milliroentgens (mR). Station numbers for which no data are reported include stations which have been deleted, stations for which the TLD was lost during the quarter, or stations for which the TLD was damaged.

* Now the National Institute of Standards and Technology (NIST)

Four sets of information are presented for each site. The first set includes the TLD station number, its direction and distance from the site, the integrated gross exposure for the period, the net exposure normalized to a 90-day standard quarter, and the historical average net exposure and standard deviation (the latter are combined under the heading "Hist. Range"). The current field measurements are listed with their respective random and total uncertainties.

The uncertainties are listed in the following format:

$$X \pm S_x; U_x$$

where: X = value of the result
 S_x = random uncertainty expressed as one standard deviation
 U_x = combined total uncertainty

The second set of data summarizes the average net exposure measured in each of the 16 standard windrose sectors (see Table 1) around the facility, normalized to a standard quarter. Also this set of data summarizes the average net exposure measured at three ranges of distances from the facility, normalized to a standard quarter. When average net exposures cannot be reported because of the unavailability of the site's control dosimeters, the average gross exposures, normalized to a standard quarter, are reported in the sector and distance data tables.

The third set of information describes geographic locations of the TLDs around the nuclear power plants. A detailed list of the TLD station locations for each site in the NRC program, as of December 31, 1993 is included. Each location is designated by a station number and is completely identified by azimuth and radial distance from the site, and physical description. Specific details of the physical location have been omitted to maintain the security of the stations.

The fourth set of data illustrates the fourth quarter measured dose around a site. Due to the constraints of digitizing the entire monitoring area onto the limited space on the map, some TLD data are not included.

Beginning with Volume 10, Number 4 of this report, an additional column of data was added alongside the individual TLD gross and net exposure data for each monitored site. The new information consists of the historical average and standard deviation for each TLD station. Sufficient data have been collected during the more than ten years that this program has been in existence to allow meaningful statistics to be calculated.

This report is one of a continuing series of technical reports covering the results and experiences of the operation of the NRC TLD Direct Radiation Monitoring Network. Suggestions on methods to improve the presentation or analysis of the data contained in this NUREG are appreciated and should be submitted to NRC Region I, 475 Allendale Road, King of Prussia, Pennsylvania 19406, ATTN: Radiation Dosimetry Specialist.

Table 1
Standard Windrose Sectors
Used in Selecting TLD Station Locations

Sector Name	Azimuth**
N*	348.75° - 11.25°
NNE	11.25° - 33.75°
NE	33.75° - 56.25°
ENE	56.25° - 78.75°
E	78.75° - 101.25°
ESE	101.25° - 123.75°
SE	123.75° - 146.25°
SSE	146.25° - 168.75°
S	168.75° - 191.25°
SSW	191.25° - 213.75°
SW	213.75° - 236.25°
WSW	236.25° - 258.75°
W	258.75° - 281.25°
WNW	281.25° - 303.75°
NW	303.75° - 326.25°
NNW	326.25° - 348.75°

* North (0° and 360°) is defined as True North.

** The principal airborne radioactivity release point (vent or stack) at each site is considered to be the center of a circle. The area of each circle is divided into 16 standard windrose sectors, each of 22.5° arc. These sectors are standardly used in the nuclear power industry to describe direction from a site.

1. INTRODUCTION

The NRC TLD Direct Radiation Monitoring Network was established in August 1979 by the NRC Office of Inspection and Enforcement (IE) to measure ambient radiation levels around NRC licensed facilities and to provide the NRC staff with prompt, independent data in emergency response and assessments. The need for such a Network was identified during the experiences at Three Mile Island (TMI) and subsequent reviews. The Network is a cooperative effort between the Office of Nuclear Reactor Regulation (NRR) headquarters, NRC Regional Offices, and participating states. The operation of the program (consisting, in part, of processing badges, shipping and packaging, data processing, and reporting) is the responsibility of the Facilities Radiological Safety and Safeguards Branch, NRC Region I, in King of Prussia, Pennsylvania.

At most sites the TLD badges are exchanged and placed in the field locations by state agencies participating under a cooperative agreement with the NRC. For sites located in nonparticipating states, the field work is performed by individuals under contract to the NRC. The dosimeters are exchanged, shipped, and processed in Region I on a quarterly schedule. The program is further described in the TMI Action Plan, Item III.D.2.4(2), NUREG-0660, "Nuclear Action Plan Developed as a Result of the TMI-2 Accident."

After the Three Mile Island accident, the NRC determined that relying solely on licensee estimates of population exposure during an accident situation was unacceptable. The NRC decided to develop its own program to provide the data needed to independently assess the radiological impact of an accident. The principal objectives of this program are to:

- (1) Assure uniform treatment of dosimeters with respect to handling, shipping, calibrating, reading, and data processing for all monitored facilities in the United States;
- (2) Establish preoperational, baseline radiation dose levels, whenever possible, for each nuclear power reactor facility;
- (3) Provide ongoing environmental radiation dosimetry data during routine operations;
- (4) Provide post-accident estimates of population exposures;
- (5) Allow for independent verification of the adequacy of NRC licensees' environmental radiation monitoring programs; and
- (6) Provide uniform, consistent environmental radiation monitoring data for use by the Congress, Federal and state agencies, the monitored facilities, and the public.

2. DOSIMETER SITE SELECTION CRITERIA

Since the variation in site characteristics is great, the staff endeavored to establish criteria that were as general as possible. The criteria have been used with great flexibility in the actual establishment of dosimetry stations in the field. In each case site data were obtained from information supplied by licensees in their Preliminary and Final Safety Analysis Reports (PSARs and FSARs), U.S. Geological Survey (USGS) topographical maps, Aerial Monitoring System (AMS) data, and state and local maps. Figure 1 illustrates the placement of dosimeters around a typical site.

2.1 TLD Network Stations Within Five Miles of the Plant Site

Around each site, TLD network stations are distributed in two concentric rings outside the licensee owner-controlled property. In each ring, one TLD station is located in each appropriate standard windrose sector. These sectors are defined in Table 1 and are those customarily used in the nuclear power industry. Dosimeter stations are not placed in sectors that consist entirely of open water or in sectors that are unoccupied or inaccessible. The inner ring is located between the licensee owner-controlled boundary and an imaginary circle of two miles radius centered on the site airborne radioactivity release point. The remaining stations are five miles or more from the plant site, as discussed below. One station is located at or close to the nearest residence to the site.

2.2 TLD Network Stations Beyond Five Miles of the Plant Site

Beyond five miles from the boundary of the owner-controlled area, TLD stations are also established at major population centers and at places of high public interest not already covered by the stations described above. Up to three stations are also established in a predominantly upwind direction to serve as indication of the ambient radiation levels that are not expected to be influenced by plant operations.

2.3 Collocated TLD Stations

At each monitored facility, several (normally five) stations are placed side by side with those of the licensee to allow for independent verification of the licensee's environmental radiation monitoring program. These stations are generally within the five mile radius.

2.4 Emergency TLD Placement

In addition to the locations monitored during normal reactor operations, additional dosimeters would be placed around the site in the event of an incident during which continued releases of radioactive material were expected. The number and locations of such dosimeters would be determined by the anticipated duration and severity of the releases as well as the meteorological conditions prevailing during the incident.

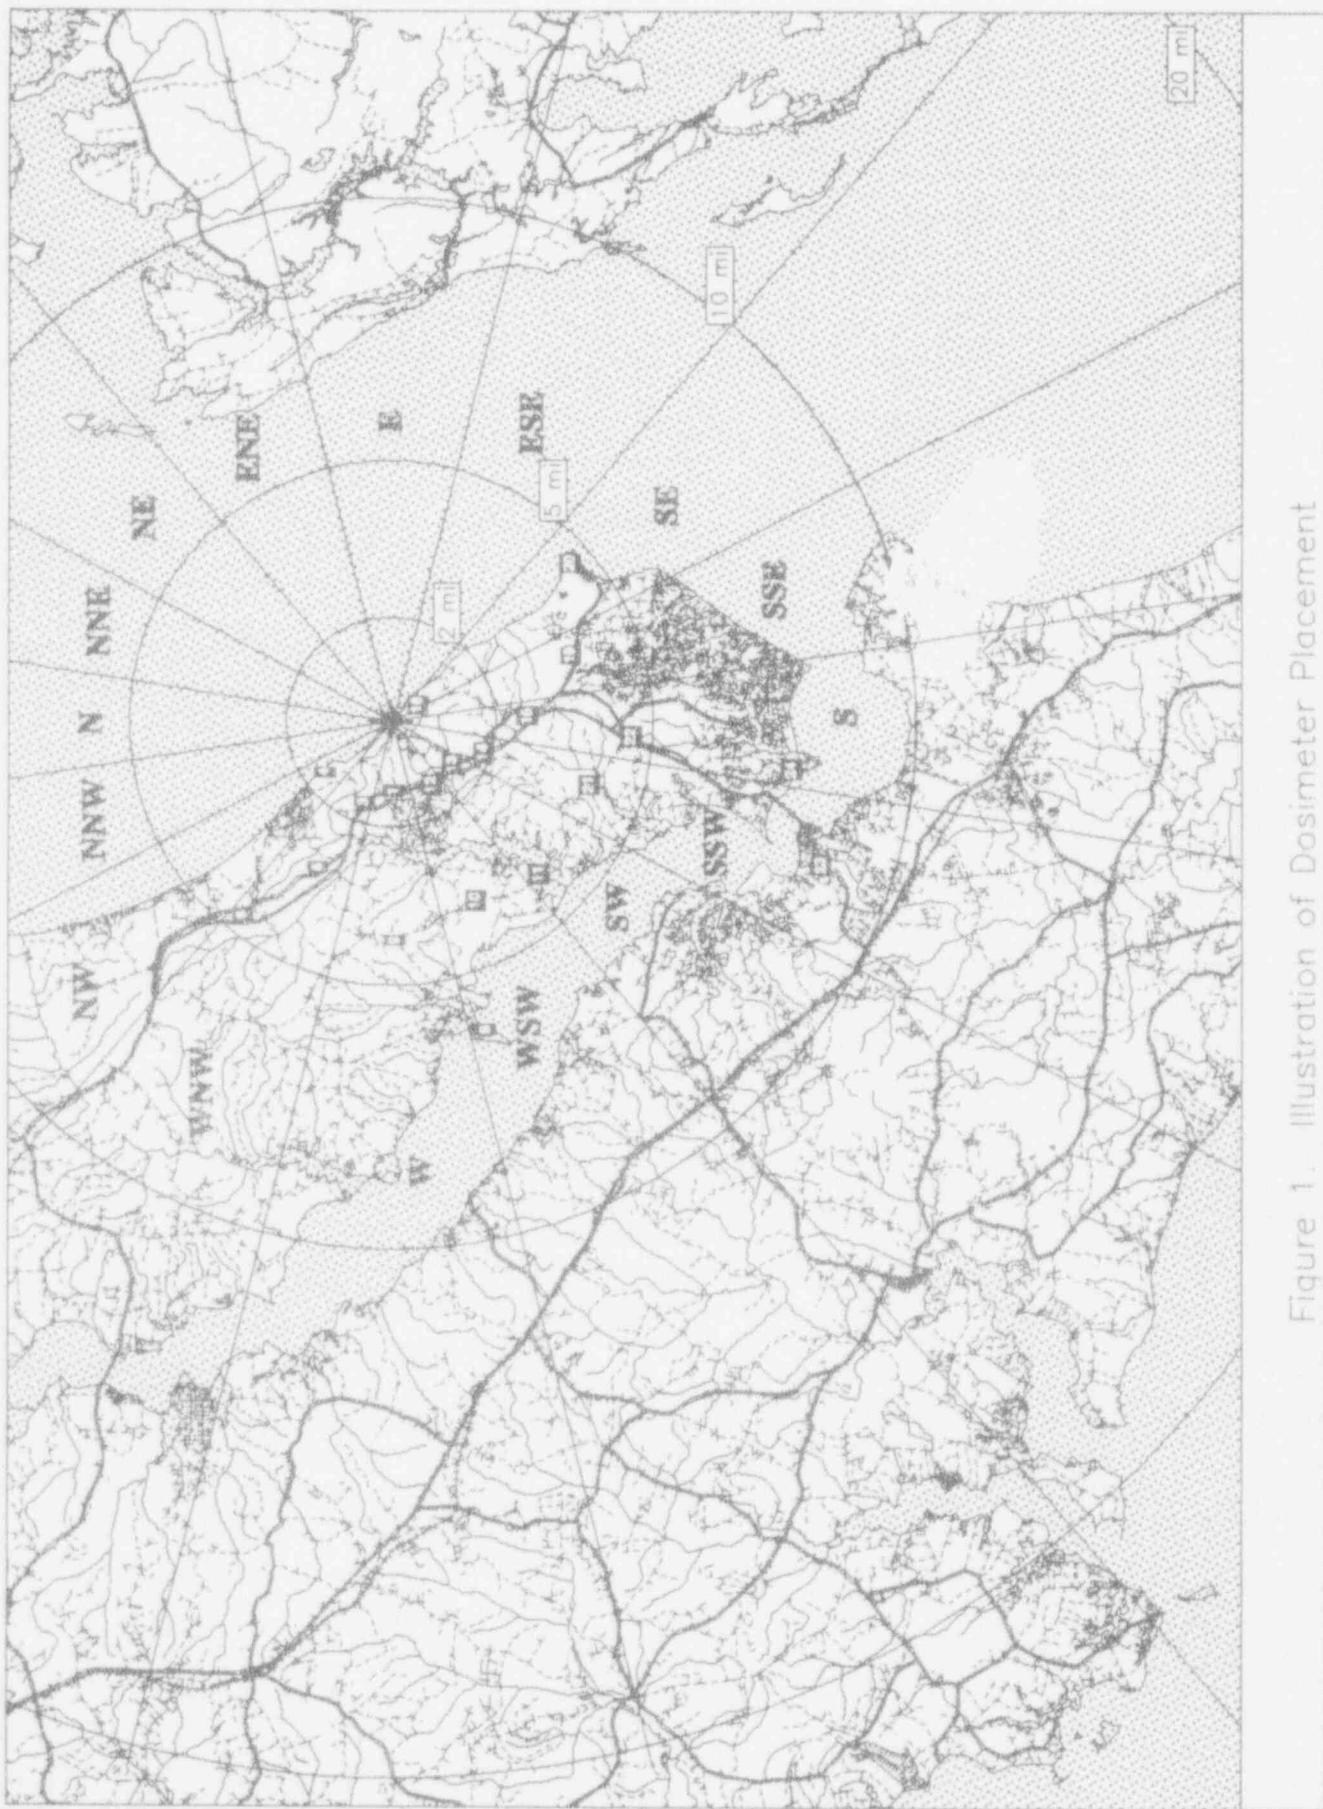


Figure 1. Illustration of Dosimeter Placement

3. EQUIPMENT AND GENERAL PROCEDURES

3.1 Dosimetry System

The NRC TLD program routinely employs the Panasonic* Model UD-801 thermoluminescent dosimeter and Model UD-710A automatic dosimeter reader. A Panasonic Model UD-702E manual dosimeter reader is also available and may be taken to a site in the event of an incident which required the processing of dosimeters near the site. The dosimeter has four thermoluminescent elements to measure radiation exposure. It consists of two elements of natural lithium borate activated with copper ($\text{Li}_2\text{B}_4\text{O}_7\text{:Cu}$), and two elements of calcium sulfate activated with thulium ($\text{CaSO}_4\text{:Tm}$). One lithium borate element uses an "open" window of 3 mg/cm^2 to minimize attenuation of beta radiation; the other incorporates a 160 mg/cm^2 plastic filter. These values are in addition to the filtration imposed by the polyamide backing (11 mg/cm^2) on one face and the teflon window (28 mg/cm^2) on the opposite face of each element.

Each of the two calcium sulfate elements is covered by an 850 mg/cm^2 lead filter (plus 160 mg/cm^2 of plastic) to attenuate low-energy photon radiation in a manner that is intended to compensate for the over-response of calcium sulfate in this portion of energy spectrum. The average response of the two calcium sulfate elements is used to determine exposure during routine operations. (See Figure 2.) The energy dependence of the calcium sulfate elements as determined by the National Bureau of Standards (NBS)** is shown in Table 3. For further details of the NBS testing, see NUREG/CR-2560, NUREG/CR-3120, and NUREG/CR-3775.

The automatic dosimeter reader consists of a badge transport and insertion mechanism, a heat source, a carbon-14 (C-14) activated reference light source, a light measurement system, and a microprocessor controller. Up to 500 TLD badges may be loaded into 10 magazines of the automatic sample changer that is attached to the reader, or single 50-badge magazines may be loaded manually. The magazine is automatically advanced to admit badges into the reading mechanism. In the mechanism, the dosimeter portion (card) of the badge is withdrawn from the holder. Each phosphor is then heated and its light output measured. When all four phosphors have been read, the card is inserted into the holder, the holder is lowered into the magazine, and the process is repeated for the next badge. (See Figure 3.) The manual dosimeter reader is similar in the reading process but dosimeters are manually inserted into the reader one at a time.

* Mention of a specific product in this report does not constitute an endorsement by the U.S. Nuclear Regulatory Commission.

** Now the National Institute of Standards and Technology (NIST)

3.2 Field Container

The dosimeter for each station is placed in a moisture-resistant polyester pouch inside a polypropylene mesh cylindrical cartridge approximately 15 cm long and 5 cm in diameter. The thickness of the pouch is approximately 5.5 mg/cm². The cartridge is attached by wire or polyester straps to a relatively permanent structure, usually a utility pole. This container provides physical security with minimum attenuation of photon radiation. It is placed approximately three meters above the ground to minimize vandalism.

3.3 Exchange Procedures

Prior to shipment, all dosimeters are calibrated by the NRC (Section 4). All dosimeters are then annealed at the Region I office and packaged for shipment. The packages are then mailed to the contractors, usually representatives of the radiological health department of the state in which the reactor is situated. In some instances, the NRC has contracted with private individuals to exchange the dosimeters.

The contractors receive the packages, travel to the sites, and exchange the dosimeters with those of the previous quarter. The contractors have been provided with lead casks in which they store the control dosimeters during the field period. At the end of the quarter, these control dosimeters are removed from the storage cask and returned by mail with the field dosimeters. The use of control dosimeters to estimate transit exposure is discussed in Section 5.

When returned to the NRC Region I office, the dosimeters are processed, using the automatic TLD reader. They are then recalibrated to establish the current response of the dosimeter and to check for dosimeter response variability.

Table 2
Calcium Sulfate Energy Response

Panasonic Model UD 801
Dosimeter Response Per Unit Exposure Relative to That
For Cesium-137 and Cobalt-60 Gamma Radiation

<u>Effective Energy (KeV)</u>	<u>Average (Element 3 + Element 4) Response</u>	
	<u>Cs-137</u>	<u>Co-60</u>
38	0.39	0.45
70	0.80	0.92
117	0.54	0.63
167	0.70	0.81
210	0.79	0.90
662	1.00	1.14
1250	0.88	1.00

Conditions: Unidirectional beam of radiation.
Dosimeters mounted in Panasonic dosimeter hangers.

ANSI N545-1975 Specification:

<u>Energy (keV)</u>	<u>Required Response</u>
80-300	.80 - 1.20
< 80	< 2

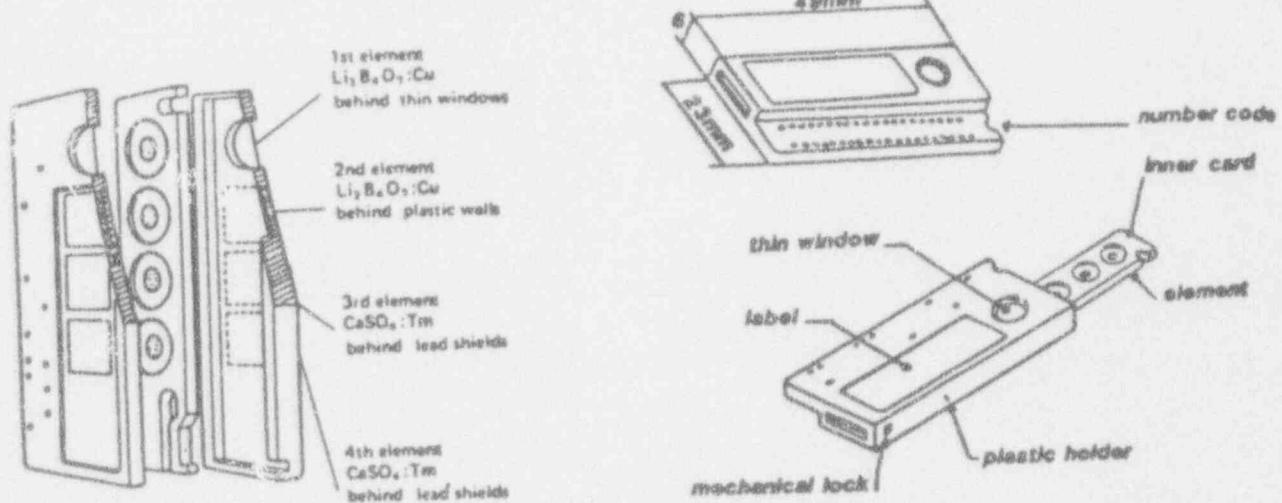


Figure 2. TLD Badge Construction

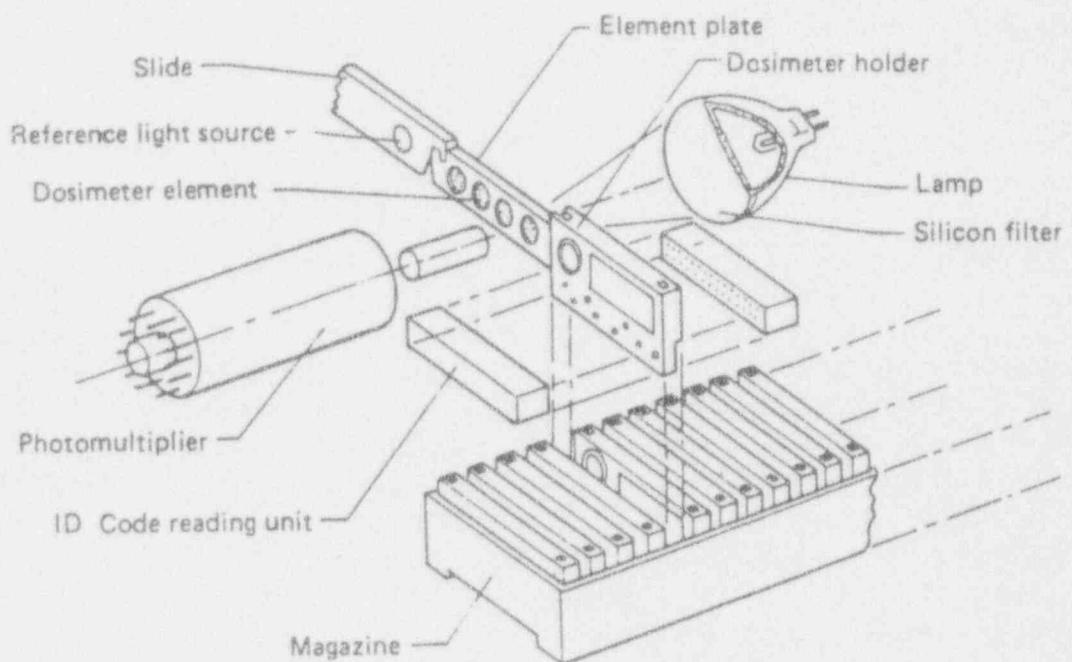


Figure 3. TLD Reader - Reading Method and Construction

4. CALIBRATION

4.1 Facilities

Two calibration facilities are available for use in the program. One facility contains a panoramic irradiator with a 120-cm diameter rotating table. The irradiator has a nominal 120-millicurie cesium-137 gamma radiation source that currently delivers an exposure rate of approximately 1.8 mR/minute at 50 cm from the source. The exposures received by the badges are monitored, using a 33cm³ air ionization chamber and a Victoreen model #550 high-precision electrometer with calibration traceable to the National Institute of Standards and Technology. The ionization chamber is placed directly over the TLD badges; the radiation field around the table is uniform within $\pm 3\%$. The exposure period is controlled by the use of a timer accurate to within ± 0.1 seconds. The exposure rate on the table has been confirmed by exposing dosimeters provided and read by the National Institute of Standards and Technology. The dosimeters exposed at this facility are selected from a set with precisely determined element calibration factors (ECFs). They are used for calibration of the TLD reader.

The NRC TLD program also uses a Williston Elin TLD Irradiator (Model WE-2001).* The major components of the WE-2001 are the electronic console including the irradiation timer and the display module, a lead castle which contains the irradiation source (Cs-137), and the magazine rack. Up to 500 TLD badges may be loaded into 10 magazines of the automatic sample changer that is integral to the irradiator. The magazine is automatically advanced to admit TLDs into the irradiation chamber. Immediately following the calibration of the TLD reader, dosimeters with precisely-known ECFs are exposed in the WE-2001, then read in order to determine its exposure rate. This permits the WE-2001 irradiator to be used in the determination of the ECFs of the field TLDs.

4.2 Procedures for Calibrating Field Dosimeters

Element calibration factors (ECFs) are determined quarterly for field dosimeters. During each calibration, each TLD badge is exposed to approximately 40 mR. The irradiated badges are stored for about 24 hours before reading to allow for the rapid fading of the low-temperature glow peak of the lithium borate elements. After the badges have been read, the ratio of recorded exposure to delivered exposure is calculated and recorded for each of the four elements of each dosimeter. These ECFs are subsequently used to modify the raw element readings to determine exposure.

* Mention of a specific product in this report does not constitute an endorsement by the U.S. Nuclear Regulatory Commission.

5. ESTIMATION OF TRANSIT EXPOSURE

Field dosimeters receive exposure both while in transit to and from the placement contractor and while in storage at the contractor's facility, as well as while they are at their monitoring locations. To determine the field exposure, it is necessary to estimate this additional exposure, which is designated transit exposure.

Two control dosimeters are sent to each contractor to estimate the transit exposure. Control #1 remains unshielded, except when stored in the NRC-provided lead cask at the contractor's facility. This cask provides 2.75 inches of lead shielding. Control #2 is no longer used. Control #3 is used to indicate whether a significant exposure was received by the dosimeters while in transit from the NRC office in King of Prussia, Pennsylvania, to the contractors. It is shipped unshielded with the new batch of dosimeters to the contractor and returned unshielded with the previous quarter's dosimeters. If an unacceptably high transit exposure is detected by this dosimeter as a result of its shipment to the site, a new set of field dosimeters will be sent to the contractor for an early exchange.

The exposure to Control #1 is the sum of the transit exposure and the exposure received while in storage during the quarter. The exposure rate during storage is estimated to be 0.09 ± 0.03 mR per day and is based on previous measurements. For information on how the exposure rate in the cask was previously estimated, refer to Appendix A of NUREG-0837, Volume 2, Number 4. The transit exposure to the field dosimeters is estimated by taking the difference between the exposure measured by Control #1 and the exposure calculated to have been received by Control #1 while in storage in the contractor's lead cask. The storage exposure rate is essentially due only to the cosmic ray component of the local natural background radiation.

Likely sources of transit exposure include shipments of medical and other radioisotopes in the mail, as well as natural terrestrial and cosmic radiation.

A summary of the control dosimeter placement and usage is included in Table 3 of this report.

Table 3
Control Dosimeter Summary

	Control #1	Control #3
Purpose of Control:	Determination of round trip transit exposure	Determination of one-way transit exposure from NRC to field
During Shipment to Contractor:	Unshielded, with field dosimeters	Unshielded, with field dosimeters
Storage Prior to Field Placement:	Unshielded, with field dosimeters	Unshielded, with field dosimeters
Storage During Quarter:	In lead shield	Not stored; returned with field dosimeters from previous quarter
Storage After Field Exchange (prior to return):	Unshielded, with field dosimeters	Unshielded, with field dosimeters*
During Shipment to NRC:	Unshielded, with field dosimeters	Unshielded, with field dosimeters*

* Applies to the control #3 dosimeter for the next quarter

6. STATISTICAL METHODS

The total uncertainty of the reported exposures is a combination of the random and systematic components of uncertainty. The random component is primarily the statistical uncertainty in the reading of the TLD elements themselves. Based on repeated known exposures, this uncertainty for the calcium sulfate elements used to determine exposure is estimated to be approximately three percent ($\pm 3\%$) for one standard deviation. There are several systematic components of uncertainty, including:

Source of Uncertainty	Value of Parameter	Uncertainty of Parameter
Energy-Directional Response	1.0	0.14 *
Fading	1.0	0.05 **
Calibration	Element Calibration Factor	0.03 x Element Calibration Factor
Estimate of Storage Shield Exposure Rate	0.0825 mR/day	0.0265 mR/day ***

* Estimate based on NBS testing of dosimeters.

** Estimate based on NRC measurements of calcium sulfate element fading.

*** Estimate reflects observed variation of past measurement of storage exposure rate.

These uncertainties are propagated according to established statistical methods for propagation of uncertainty. Since one component of the systematic uncertainty is greater than one-third the sum of all the components, the overall uncertainty was calculated by taking the square root of the sum of the variances of all the components. This is in accordance with U.S. Environmental Protection Agency (EPA) recommendations contained in "Upgrading Environmental Radiation Data" - Health Physics Society Committee Report HPSR-1, 1980. The uncertainty of the adjusted exposure is determined by combining the uncertainties of the gross and transit exposures.

The uncertainties are listed in the following format:

$X \pm S_x; U_x$

where: X = value of the result

S_x = random uncertainty expressed as one standard deviation

U_x = combined total uncertainty

Example of Uncertainty Estimation

Assumptions: Gross Field Exposure = 25 mR
 Control 1 Exposure = 10 mR
 Time in Field = 90 days

A. Gross Field Exposure Uncertainty

$$\text{Random Uncertainty} = (25 \text{ mR})(0.03) = 0.75 \text{ mR}$$

Systematic Uncertainty:

$$\begin{aligned}\text{Calibration} &= (25 \text{ mR})(0.03) = 0.75 \text{ mR} \\ \text{Fading} &= (25 \text{ mR})(0.05) = 1.25 \text{ mR} \\ \text{Energy-Directional Dependence} &= (25 \text{ mR})(0.14) = 3.50 \text{ mR}\end{aligned}$$

$$\text{Total Uncertainty} = [(0.75)^2 + (1.25)^2 + (3.50)^2]^{1/2} = 3.86 \text{ mR}$$

$$\text{Gross Field Exposure} = 25 \pm 0.8 ; 3.9 \text{ mR}$$

B. Control 1 Exposure Uncertainty

$$\text{Random Uncertainty} = (10 \text{ mR}) (0.03) = 0.30 \text{ mR}$$

Systematic Uncertainty:

$$\begin{aligned}\text{Calibration} &= (10 \text{ mR})(0.03) = 0.30 \text{ mR} \\ \text{Fading} &= (10 \text{ mR})(0.05) = 0.50 \text{ mR} \\ \text{Energy-Directional Dependence} &= (10 \text{ mR})(0.14) = 1.40 \text{ mR} \\ \text{Total Uncertainty} &= 1.55 \text{ mR}\end{aligned}$$

$$\text{Control 1 Exposure} = 10 \pm 0.3 ; 1.6 \text{ mR}$$

C. Transit Exposure Uncertainty

The uncertainty of the transit exposure is determined by combining the uncertainty of the Control 1 measurement with the uncertainty of the storage exposure.

$$\begin{aligned}\text{Storage Exposure} &= (90 \text{ days})(0.0825 \text{ mR/day}) = 7.43 \text{ mR} \\ \text{Storage Exposure Uncertainty} &= (90 \text{ days})(0.0265 \text{ mR/day}) = 2.38 \text{ mR}\end{aligned}$$

This uncertainty is treated as a systematic uncertainty. The transit exposure is estimated as the difference between the Control 1 measured exposure and the estimated storage exposure. The uncertainty is determined by combining their associated uncertainties.

$$\begin{aligned}
 \text{Transit Exposure} &= (10 \text{ mR}) - (7.4 \text{ mR}) = 2.6 \text{ mR} \\
 \text{Systematic Uncertainty} \\
 \text{of Transit Exposure} &= [(1.55)^2 + (2.38)^2]^{1/2} = 2.84 \text{ mR} \\
 \text{Transit Exposure} &= 2.6 \pm 0.3 ; 2.8 \text{ mR}
 \end{aligned}$$

D. Net Field Exposure Uncertainty

The net field exposure is the difference between the gross field exposure and the transit exposure. The uncertainty is determined by combining the associated uncertainties.

$$\begin{aligned}
 \text{Net Field Exposure} &= (25 \text{ mR}) - (2.6 \text{ mR}) = 22.4 \text{ mR} \\
 \text{Random Uncertainty} &= [(0.8)^2 + (0.3)^2]^{1/2} = 0.9 \text{ mR} \\
 \text{Systematic Uncertainty} &= [(3.86)^2 + (2.84)^2]^{1/2} = 4.8 \text{ mR} \\
 \text{Net Field Exposure} &= 22.4 \pm 0.9 ; 4.8 \text{ mR}
 \end{aligned}$$

If the time had not been 90 days, the net field exposure and its associated uncertainties would be adjusted and reported as exposure per 90 days.

E. Historical Average Exposure Uncertainty

The uncertainty of the historical average exposure is expressed as the unbiased standard deviation of the population normalized net field exposures reported from 1982 (or earliest available period after 1982) to the present quarter. Quarters for which net exposures could not be calculated are not included in the historical average. Data deemed to be anomalous (due to exposure in transit, etc.) also are not included in the historical average.

7. QUALITY ASSURANCE PROGRAM

The NRC TLD Quality Assurance (QA) program consists of the planned and systematic actions necessary to provide adequate confidence in the accuracy and precision of the measurements obtained through the NRC TLD Direct Radiation Monitoring Network. These measurements utilize instrumentation located in the Region I Dosimetry Laboratory. The QA program for these measurements has been established in order to:

- (1) Provide a means of relating the results of the measurements to the U.S. National Institute of Standards and Technology (NIST), whenever possible;
- (2) Obtain a measure of confidence in the accuracy and precision of the data; and
- (3) Identify any deficiencies in monitoring and analyses so that corrective actions can be taken.

The following sections describe the procedures for ensuring the quality of proper measurements.

7.1 Dosimeter Quality Control

Before dosimeters are placed into service, they must pass the following tests:

7.1.1 Visual Inspection

Badges are visually inspected to ensure that the elements are of the correct type and have the right filtration.

7.1.2 Identification Number and Dosimeter Type

Dosimeters are read by the TLD reader and the badge identification numbers reported on the TLD reader output are compared with the corresponding numbers on the badge labels. Any deviations are corrected prior to dosimeter calibration or use.

7.1.3 Element Calibration Factors

Element calibration factors (see section 4 of this report) are determined for all dosimeters upon being placed into service. Dosimeters for which any element calibration factor falls below 0.5 are withdrawn from service.

7.2 Reader Quality Control

The calibration of the TLD reader is verified after any significant servicing or maintenance. In addition, a Quality Control (QC) check is routinely performed on the reader to determine

system trends, to apply corrections as necessary, and to ensure that the system is operational. The WE-2001 irradiator described in Section 4.1 is used to irradiate each dosimeter element. These dosimeters previously have been calibrated with a cesium-137 source to establish their element correction factors. A depleted uranium slab is also available for irradiation of dosimeters. This source serves primarily as a check on the reproducibility of readings between reader calibrations. In addition, the following system parameters are measured and printed by the reader.

7.2.1 Sensitivity Correction Factor

Prior to reading a rack of up to 50 dosimeters, the TLD reader determines the sensitivity correction factor. This factor is the ratio of the mean of 10 reference carbon-14 light source measurements to a constant reference reading. This factor is automatically applied by the reader to all badge readings to correct for changes in light transmission through the reader's optics. The reader will not operate if this factor is greater than 1.1 or less than 0.9.

7.2.2 Dark Counts

The dark count (from electronic noise, light leaks, thermionic emissions) is measured by the reader before it reads each badge. The dark count is usually less than five counts. The reader will not operate if the measured dark count is greater than 20 counts.

7.2.3 Reference Element Counts

A pin hole on the slide mechanism (that moves the dosimeters horizontally into the heating path) is briefly aligned between the heating lamp and the photomultiplier tube, allowing a small amount of light to pass from the lamp to the PMT. This reference element (RE) reading serves as a check of the integrity of the filters in the light path. The RE is usually less than 20 counts. The reader will not operate if the measured RE is greater than 600 counts.

7.3 Quality Assurance Audits

The NRC TLD Direct Radiation Monitoring Network is monitored on a regular basis by the NRC Region I Radiation Dosimetry Specialist. In addition to this continuing evaluation, the program will be audited by a member of management designated by the Region I Administrator. This audit ensures that all operations, maintenance, calibration, and quality control activities are being performed in accordance with approved procedures. The results of these audits will be documented and reported to the Region I Regional Administrator. Deficiencies identified will be resolved as soon as practicable and the Region I Regional Administrator is informed of their resolution.

8. INTERCOMPARISON

8.1 Description

The Tenth International Intercomparison of Environmental Dosimeters was performed jointly by the U.S. Department of Energy and Idaho State University in 1993. One hundred and two (102) foreign and domestic dosimetry laboratories participated in this study, including the NRC TLD Laboratory.

The project's sponsor exposed dosimeters at a field site, and to two levels from a Cs-137 source in the laboratory. Those exposed dosimeters were then distributed to all participants to determine the net exposure.

The NRC TLD Laboratory read its exposed dosimeters (TLDs). The element calibration factors (ECFs) of those TLDs were then determined, as discussed in Section 4.2. The net exposure was calculated by applying the ECF correction and subtracting the transit exposure.

8.2 Results

The results shown below are from the Tenth Intercomparison Preliminary Report, August 23, 1993. A final report has not been issued. The data in that report were presented in units of microGray (μGy). To be consistent with the way data are presented in this report of the NRC TLD Direct Radiation Monitoring Network, the data have been converted to units of milliroentgen (mR) using a factor of 8.76 μGy per mR.

Exposure type	Est. Delivered Exposure \pm uncertainty (mR)	NRC Measured Exposure (mean \pm s.d.) (mR)	Ratio*	All Participants (mean \pm s.d.) (mR)
Field Site	27.1 \pm 1.6	24.7 \pm 9.8	0.91	26.4 \pm 5.1
Cs-137 (low)	25.9 \pm 1.3	26.1 \pm 10.0	1.01	25.0 \pm 4.7
Cs-137 (high)	72.7 \pm 1.9	72.5 \pm 17.4	1.00	69.8 \pm 10.2

*Ratio is defined as: NRC Measured Exposure / Est. Delivered Exposure

8.3 Discussion

The NRC's results are in excellent agreement with the laboratory exposures reported by the sponsor of the Tenth International Intercomparison of Environmental Dosimeters. The result for the Field Site was acceptable, considering that the Intercomparison sponsor found it necessary to derive an estimated delivered field exposure for a period of about four weeks, during which heavy snow precluded servicing the high pressure argon ion chambers that were used for measuring this exposure.

The NRC TLD Laboratory will report the results of future intercomparison studies as they become available.

9. SUMMARY OF OPERATING EXPERIENCES

Since the inception of this program, many problems common to environmental monitoring programs have been experienced. Many of the problems were associated with the field sampling. Environmental monitoring devices are vulnerable to vandalism and mischief. The manner in which NRC TLDs are packaged and installed was designed to protect the dosimeter from the elements and curious individuals. NRC TLD dosimeters have been vandalized, shot, melted in a forest fire, and stolen. The recovery rate (that is, the percentage of return) has averaged approximately 95% which has been acceptable, considering the nature and scope of the program.

The equipment and procedures used by the NRC TLD Direct Radiation Monitoring Network generally satisfied the requirements of the program for 1993.

Table 4 lists all licensed facilities included in the Network as of December 31, 1993.

Table 4

Sites Monitored During
Fourth Quarter, 1993

1.	Arkansas Nuclear One	37.	Millstone
2.	Beaver Valley	38.	Monticello
3.	Big Rock Point	39.	North Anna
4.	Braidwood	40.	Oconee
5.	Browns Ferry	41.	Oyster Creek
6.	Brunswick	42.	Palisades
7.	Byron	43.	Palo Verde
8.	Callaway	44.	Peach Bottom
9.	Calvert Cliffs	45.	Perry
10.	Catawba	46.	Pilgrim
11.	Clinton	47.	Prairie Island
12.	Comanche Peak	48.	Quad Cities
13.	D. C. Cook	49.	Rancho Seco
14.	Cooper	50.	River Bend
15.	Crystal River	51.	Robinson
16.	Davis-Besse	52.	St. Lucie
17.	Diablo Canyon	53.	Salem/Hope Creek
18.	Dresden	54.	San Onofre
19.	Duane Arnold	55.	Seabrook
20.	Farley	56.	Sequoyah
21.	Fermi	57.	Shoreham
22.	FitzPatrick/Nine Mile Point	58.	South Texas
23.	Fort Calhoun	59.	Summer
24.	Fort St. Vrain	60.	Surry
25.	Ginna	61.	Susquehanna
26.	Grand Gulf	62.	Three Mile Island
27.	Haddam Neck	63.	Trojan
28.	Harris	64.	Turkey Point
29.	Hatch	65.	Vermont Yankee
30.	Indian Point	66.	Vogtle
31.	Kewaunee/Point Beach	67.	Washington Nuclear 2
32.	Lacrosse	68.	Waterford
33.	LaSalle	69.	Watts Barr
34.	Limerick	70.	Wolf Creek
35.	Maine Yankee	71.	Yankee Rowe
36.	McGuire	72.	Zion

10. ENVIRONMENTAL DIRECT RADIATION MONITORING DATA FOR NRC
LICENSED NUCLEAR POWER REACTORS

Individual site data reports begin on the following page.

ARKANSAS

TLD Direct Radiation Environmental Monitoring
 For the period 930913-940209 150 Days
 Field Time: 99 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	4	0.4	26.5 +- 0.8; 4.0	16.9 +- 0.8; 4.9
2	353	4.1	26.1 +- 0.8; 3.9	16.5 +- 0.8; 4.8
3	32	1.3	26.3 +- 0.8; 3.9	16.8 +- 0.8; 4.8
4	13	3.3	25.1 +- 0.8; 3.8	15.7 +- 0.8; 4.7
5	53	1.5	26.0 +- 0.8; 3.9	16.5 +- 0.8; 4.8
6	37	3.6	25.9 +- 0.8; 3.9	16.4 +- 0.8; 4.8
7	78	2.5	27.9 +- 0.8; 4.2	18.2 +- 0.9; 5.0
8	60	3.2	28.3 +- 0.8; 4.2	18.6 +- 0.9; 5.0
9	92	0.5	28.8 +- 0.9; 4.3	19.0 +- 0.9; 5.1
10	83	5.5	26.3 +- 0.8; 4.0	16.8 +- 0.8; 4.8
11	122	2.1	25.3 +- 0.8; 3.8	15.8 +- 0.8; 4.7
12	109	6.8	27.0 +- 0.8; 4.1	17.4 +- 0.9; 4.9
13	138	2.6	24.0 +- 0.7; 3.6	14.7 +- 0.8; 4.6
14	130	4.9	25.4 +- 0.8; 3.8	16.0 +- 0.8; 4.7
16	167	4.4	25.4 +- 0.8; 3.8	16.0 +- 0.8; 4.7
17	171	0.4	26.3 +- 0.8; 3.9	16.7 +- 0.8; 4.8
18	189	3.2	26.6 +- 0.8; 4.0	17.0 +- 0.8; 4.9
19	205	2.9	26.2 +- 0.8; 3.9	16.7 +- 0.8; 4.8
20	195	5.8	25.3 +- 0.8; 3.8	15.9 +- 0.8; 4.7
21	235	0.5	28.3 +- 0.8; 4.2	18.5 +- 0.9; 5.0
22	230	3.6	23.5 +- 0.7; 3.5	14.2 +- 0.8; 4.6
23	257	2.8	24.5 +- 0.7; 3.7	15.1 +- 0.8; 4.7
24	243	4.5	25.5 +- 0.8; 3.8	16.0 +- 0.8; 4.7
25	279	1.2	29.2 +- 0.9; 4.4	19.4 +- 0.9; 5.1
26	263	4.3	25.6 +- 0.8; 3.8	16.1 +- 0.8; 4.8
27	298	0.4	27.1 +- 0.8; 4.1	17.5 +- 0.9; 4.9
28	293	5.8	26.2 +- 0.8; 3.9	16.7 +- 0.8; 4.8
29	326	1.9	27.0 +- 0.8; 4.1	17.4 +- 0.9; 4.9
30	308	4.8	27.2 +- 0.8; 4.1	17.6 +- 0.9; 4.9
31	345	1.3	28.0 +- 0.8; 4.2	18.3 +- 0.9; 5.0
32	335	4.2	24.5 +- 0.7; 3.7	15.1 +- 0.8; 4.6
33	110	0.8	26.9 +- 0.8; 4.0	17.3 +- 0.9; 4.9
39	112	6.0	26.5 +- 0.8; 4.0	17.0 +- 0.8; 4.9
40	147	8.0	26.5 +- 0.8; 4.0	16.9 +- 0.8; 4.8
41	106	17.0	27.5 +- 0.8; 4.1	17.8 +- 0.9; 5.0
42	310	17.0	24.6 +- 0.7; 3.7	15.2 +- 0.8; 4.7
43	105	5.2	25.7 +- 0.8; 3.8	16.2 +- 0.8; 4.8
44	315	13.0	26.7 +- 0.8; 4.0	17.1 +- 0.8; 4.9
45	47	8.9	24.1 +- 0.7; 3.6	14.8 +- 0.8; 4.6
46	115	8.3	28.8 +- 0.9; 4.3	19.0 +- 0.9; 5.1
47	208	20.0	25.6 +- 0.8; 3.8	16.1 +- 0.8; 4.8
48	179	19.0	26.9 +- 0.8; 4.0	17.3 +- 0.9; 4.9
49	150	22.0	27.1 +- 0.8; 4.1	17.5 +- 0.9; 4.9

Transit Dose = 7.9 +- 0.5; 3.6

ARKANSAS

For the period 930913-940209

TLD Direct Radiation Environmental Monitoring

Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	16.7 +- 0.3	2
11.26 - 33.75 NNE	16.2 +- 0.8	2
33.76 - 56.25 NE	15.9 +- 0.9	3
56.26 - 78.75 ENE	18.4 +- 0.2	2
78.76 - 101.25 E	17.9 +- 1.5	2
101.26 - 123.75 ESE	17.2 +- 1.1	7
123.76 - 146.25 SE	15.3 +- 0.9	2
146.26 - 168.75 SSE	16.4 +- 0.7	2
168.76 - 191.25 S	16.9 +- 0.2	2
191.26 - 213.75 SSW	16.3 +- 0.6	2
213.76 - 236.25 SW	16.4 +- 3.1	2
236.26 - 258.75 WSW	15.6 +- 0.6	2
258.76 - 281.25 W	17.8 +- 2.3	2
281.26 - 303.75 WNW	17.1 +- 0.6	2
303.76 - 326.25 NW	16.8 +- 1.1	4
326.26 - 348.75 NNW	16.7 +- 2.3	2


Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	17.7 +- 1.0	11
2 - 5	16.2 +- 1.2	17
> 5	16.7 +- 1.1	12
Upwind Control	17.0 +- 0.7	3

ARKANSAS

TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	4	S. OF HERSHEL BENNETT HOME
2	353	E. PT. CHURCH
3	32	N. OF U.S. 64
4	13	N. OF FARM RD.
5	53	U.S. 64 & FARM RD.
6	37	MAP COORDINATE 522
7	78	MISSION CEMETERY
8	60	COORDINATE 477
9	92	METEOR. TOWER
10	83	COORDINATE 356
11	122	COORDINATE 354
12	109	AP&L (RUSSELLVILLE)
13	138	COORDINATE 372
14	130	SKYLINE DR.
16	167	HWY. 22 & LITTLE HAYES CR.
17	171	MAY CEMETERY
18	189	HWY. 22
19	205	HWY. 22
20	195	SUNSET PT.
21	235	AP&L LODGE
22	230	HWY. 22
23	257	PLEDGER CEMETERY
24	243	DELAWARE
25	279	SHALE PT.
26	263	RD. TO RIVER MTN.
27	298	SWAN CEMETERY
28	293	FINEY
29	326	LONDON
30	308	COORDINATE 621
31	345	HWY. 64
32	335	MARTIN CHAPEL
33	110	HOME OF D. H. DOUGLAS
39	112	RUSSELLVILLE HIGH SCHOOL
40	147	DARDANELL HIGH SCHOOL
41	106	ATKINS
42	310	CLARKSVILLE
43	105	POLYTECHNIC COLLEGE
44	315	LAMAR ELEMENTARY SCHOOL
45	47	DOVER HIGH SCHOOL
46	115	RUSSELLVILLE AIRPORT
47	208	DANVILLE UTILITY SUBSTATION
48	179	POST OFFICE
49	150	PERRY CASA HIGH SCHOOL

NRC TLD DOSES FOR ARKANSAS AREA

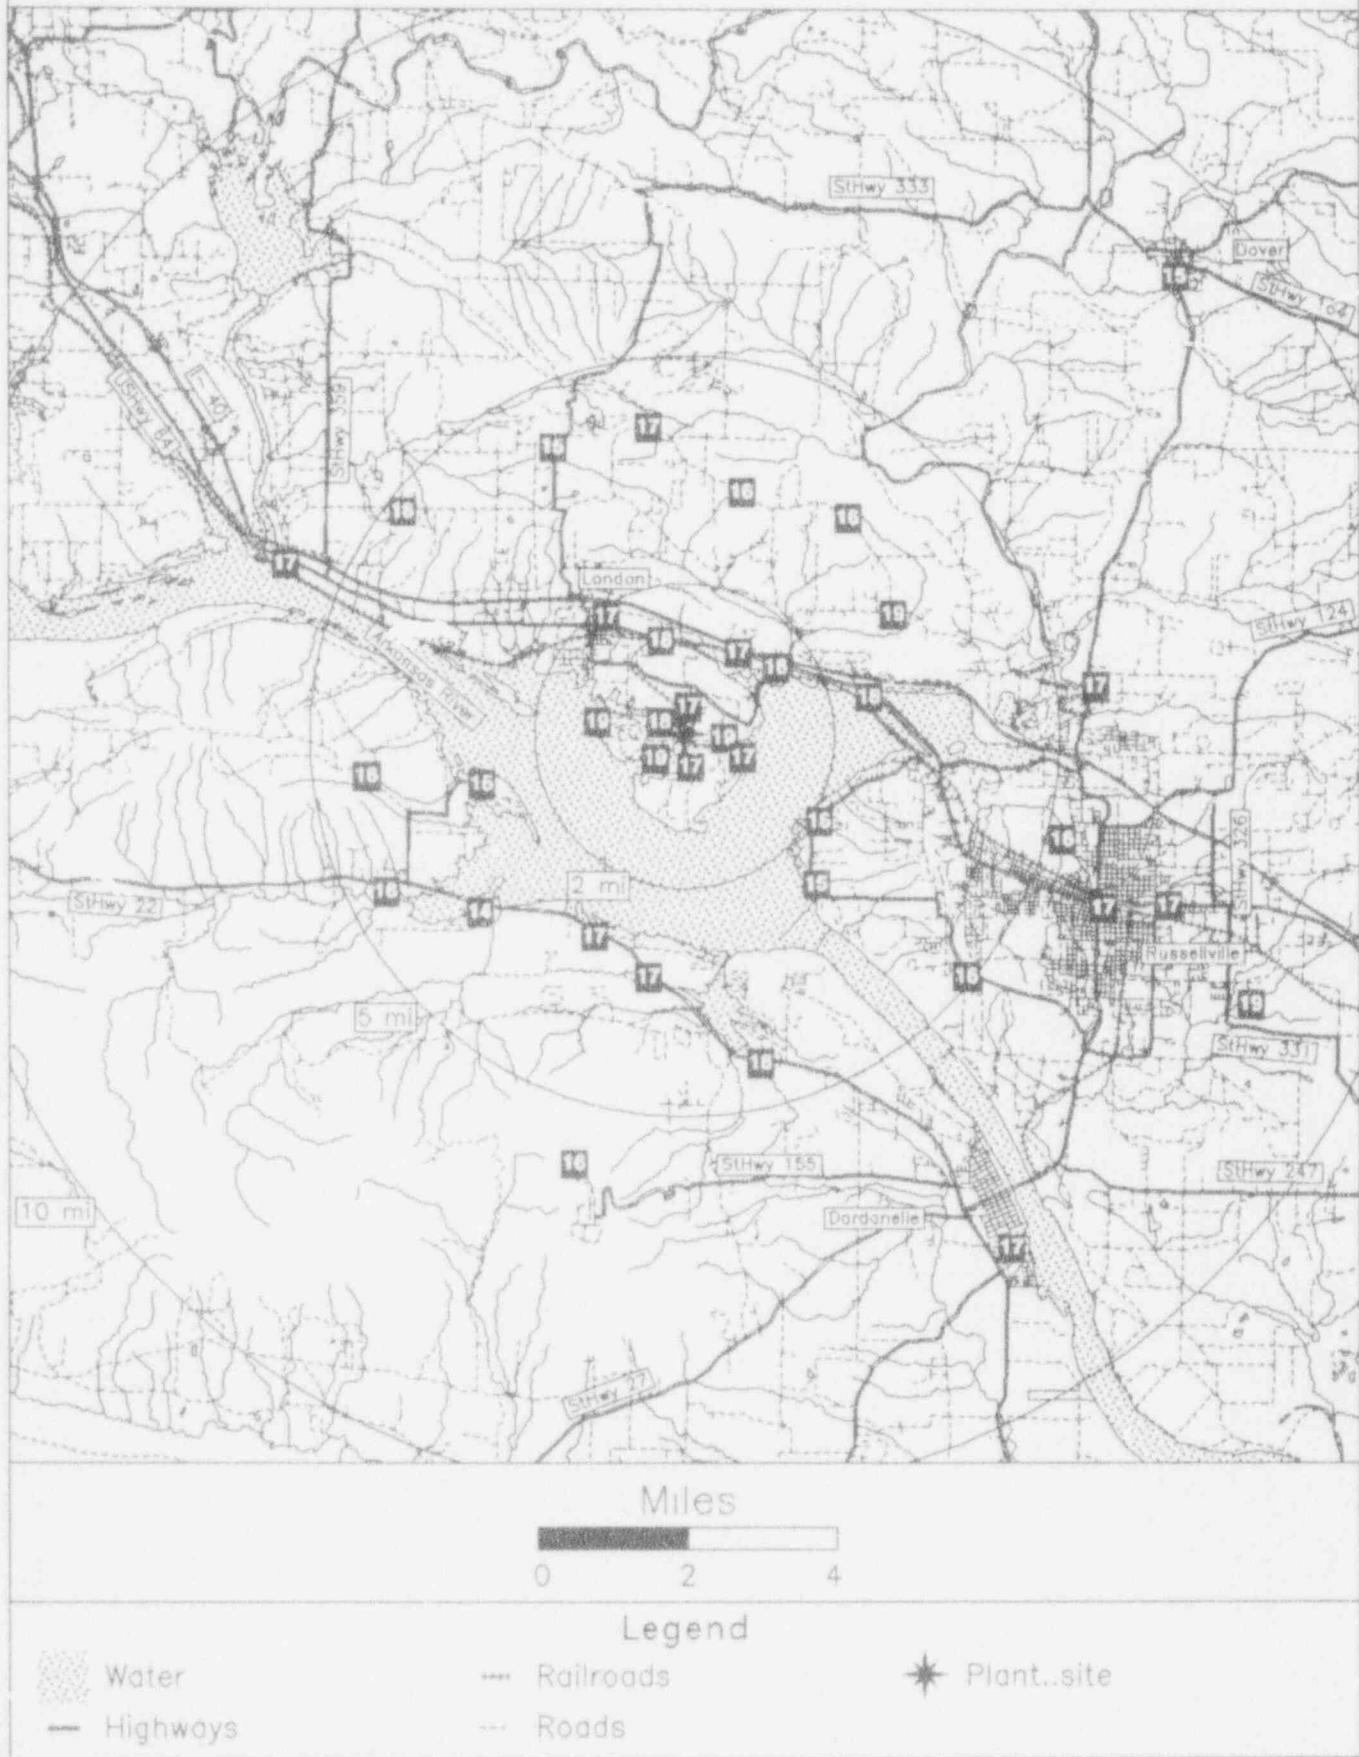

BEAVER VALLEY
 TLD Direct Radiation Environmental Monitoring
 For the period 930915-940215 154 Days
 Field Time: 99 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	340 15.8	26.8 +- 0.8; 4.0	16.7 +- 0.9; 4.9	17.2 +- 1.8
2	3 13.1	26.7 +- 0.8; 4.0	16.6 +- 0.9; 4.9	17.4 +- 1.6
4	30 11.9	27.1 +- 0.8; 4.1	17.0 +- 0.9; 4.9	19.8 +- 2.0
5	53 8.2	27.3 +- 0.8; 4.1	17.2 +- 0.9; 5.0	18.7 +- 1.5
6	58 9.1	28.4 +- 0.9; 4.3	18.1 +- 0.9; 5.1	19.5 +- 1.6
7	97 8.0	29.6 +- 0.9; 4.4	19.3 +- 0.9; 5.2	19.8 +- 1.8
8	110 4.2	28.1 +- 0.8; 4.2	17.9 +- 0.9; 5.0	19.1 +- 1.6
9	111 1.9	29.5 +- 0.9; 4.4	19.2 +- 0.9; 5.2	20.0 +- 1.9
10	92 2.2	28.0 +- 0.8; 4.2	17.8 +- 0.9; 5.0	19.5 +- 1.3
11	64 3.6	28.3 +- 0.8; 4.2	18.1 +- 0.9; 5.1	19.7 +- 2.0
12	148 4.0	30.8 +- 0.9; 4.6	20.4 +- 1.0; 5.3	21.0 +- 1.2
13	171 4.4	27.9 +- 0.8; 4.2	17.7 +- 0.9; 5.0	18.7 +- 1.7
14	183 4.4	27.2 +- 0.8; 4.1	17.1 +- 0.9; 5.0	18.5 +- 1.4
15	198 3.6	28.5 +- 0.9; 4.3	18.2 +- 0.9; 5.1	18.9 +- 1.7
16	254 5.7	27.2 +- 0.8; 4.1	17.1 +- 0.9; 5.0	18.4 +- 1.5
17	267 6.5	26.7 +- 0.8; 4.0	16.6 +- 0.9; 4.9	17.8 +- 1.7
18	231 2.5	27.2 +- 0.8; 4.1	17.1 +- 0.9; 5.0	18.8 +- 1.6
19	266 2.5	29.3 +- 0.9; 4.4	19.0 +- 0.9; 5.2	20.3 +- 1.6
20	291 3.8	26.2 +- 0.8; 3.9	16.2 +- 0.8; 4.9	17.2 +- 2.0
21	298 2.4	30.3 +- 0.9; 4.5	19.9 +- 0.9; 5.3	20.9 +- 1.7
22	219 1.5	27.0 +- 0.8; 4.0	16.9 +- 0.9; 4.9	17.8 +- 1.2
23	252 2.4	30.3 +- 0.9; 4.5	19.9 +- 0.9; 5.3	21.2 +- 2.4
24	207 2.2	29.4 +- 0.9; 4.4	19.1 +- 0.9; 5.2	19.7 +- 1.7
25	187 2.2	29.9 +- 0.9; 4.5	19.6 +- 0.9; 5.2	20.1 +- 1.7
26	158 2.2	27.2 +- 0.8; 4.1	17.1 +- 0.9; 5.0	19.2 +- 1.7
27	135 1.9	28.5 +- 0.9; 4.3	18.3 +- 0.9; 5.1	19.9 +- 1.4
28	99 1.4	29.2 +- 0.9; 4.4	18.9 +- 0.9; 5.2	20.4 +- 1.9
29	64 1.4	27.2 +- 0.8; 4.1	17.1 +- 0.9; 5.0	18.6 +- 1.8
30	53 1.0	28.5 +- 0.9; 4.3	18.2 +- 0.9; 5.1	19.1 +- 1.6
31	320 1.4	Missing Dosimeter	No Net Data	21.3 +- 2.0
32	320 3.5	27.6 +- 0.8; 4.1	17.5 +- 0.9; 5.0	19.0 +- 1.8
33	335 2.5	27.9 +- 0.8; 4.2	17.7 +- 0.9; 5.0	19.2 +- 1.7
34	340 5.2	23.8 +- 0.7; 3.6	14.0 +- 0.8; 4.6	17.2 +- 2.1
35	4 3.5	28.7 +- 0.9; 4.3	18.5 +- 0.9; 5.1	19.8 +- 1.9
36	23 3.2	30.3 +- 0.9; 4.5	19.9 +- 0.9; 5.3	22.0 +- 1.8
37	42 2.8	25.9 +- 0.8; 3.9	15.9 +- 0.8; 4.8	16.6 +- 1.2
38	27 1.6	25.9 +- 0.8; 3.9	15.9 +- 0.8; 4.8	17.8 +- 2.0
39	348 1.6	28.2 +- 0.8; 4.2	18.0 +- 0.9; 5.1	19.1 +- 1.7
40	340 15.8	24.6 +- 0.7; 3.7	14.8 +- 0.8; 4.7	16.5 +- 1.7
41	340 15.8	25.3 +- 0.8; 3.8	15.4 +- 0.8; 4.8	17.0 +- 1.5

Transit Dose = 8.4 +- 0.5; 3.6

BEAVER VALLEY
For the period 930915-940215

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	17.6 +- 1.3	2
11.26 - 33.75 NNE	17.6 +- 2.1	3
33.76 - 56.25 NE	17.1 +- 1.2	3
56.26 - 78.75 ENE	17.8 +- 0.6	3
78.76 - 101.25 E	18.7 +- 0.8	3
101.26 - 123.75 ESE	18.5 +- 0.9	2
123.76 - 146.25 SE	18.3 +- 0.0	1
146.26 - 168.75 SSE	18.8 +- 2.3	2
168.76 - 191.25 S	18.1 +- 1.3	3
191.26 - 213.75 SSW	18.7 +- 0.6	2
213.76 - 236.25 SW	17.0 +- 0.1	2
236.26 - 258.75 WSW	18.5 +- 2.0	2
258.76 - 281.25 W	17.8 +- 1.7	2
281.26 - 303.75 WNW	18.0 +- 2.6	2
303.76 - 326.25 NW	17.5 +- 0.0	1
326.26 - 348.75 NNW	16.6 +- 2.2	3

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	17.8 +- 1.1	8
2 - 5	18.2 +- 1.3	20
> 5	17.0 +- 1.5	8
Upwind Control	15.6 +- 1.0	3

BEAVER VALLEY
TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	340	EAST PALESTINE ,OHIO
2	3	DARLINGTON
4	30	BEAVER FALLS
5	53	BEAVER
6	58	MONACA
7	97	ALIQUIPPA
8	110	SHANNON ROAD
9	111	PA 18 & GREEN GARDEN ROAD
10	92	PA 18
11	64	PA 18 & BAUER ROAD
12	148	PA 18 & SERVICE CHURCH ROAD
13	171	PA 151
14	183	US 30 & PLEASANT HILL ROAD
15	198	REED SCHOOL ROAD
16	254	US 30 & WV 8
17	267	CHESTER, WEST VIRGINIA
18	231	HOOKSTOWN
19	266	HILL ROAD
20	291	GEORGETOWN
21	298	RIVER OPPOSITE MIDLAND
22	219	PA 168 FARM
23	252	HILL ROAD
24	207	MCCLEARY ROAD
25	187	MCCLEARY & SHAFFER ROADS
26	158	SHIVLER & MC CLEARY ROADS
27	135	MCCLEARY ROAD
28	99	SHIPPINGPORT HILL RD
29	64	SHIPPINGPORT HILL & COTTER ROADS
30	53	SHIPPINGPORT
31	320	MIDLAND
32	320	PA 168 & EASTWOOD DRIVE
33	335	FOREST HILL ROAD
34	340	FAIRVIEW
35	4	ENGLE ROAD
36	23	ENGLE ROAD
37	42	OHIOVIEW
38	27	INDUSTRY
39	348	BELL TELEPHONE BUILDING
40	340	EAST PALESTINE,OHIO
41	340	EAST PALESTINE,OHIO

NRC TLD DOSES FOR BEAVER VALLEY AREA

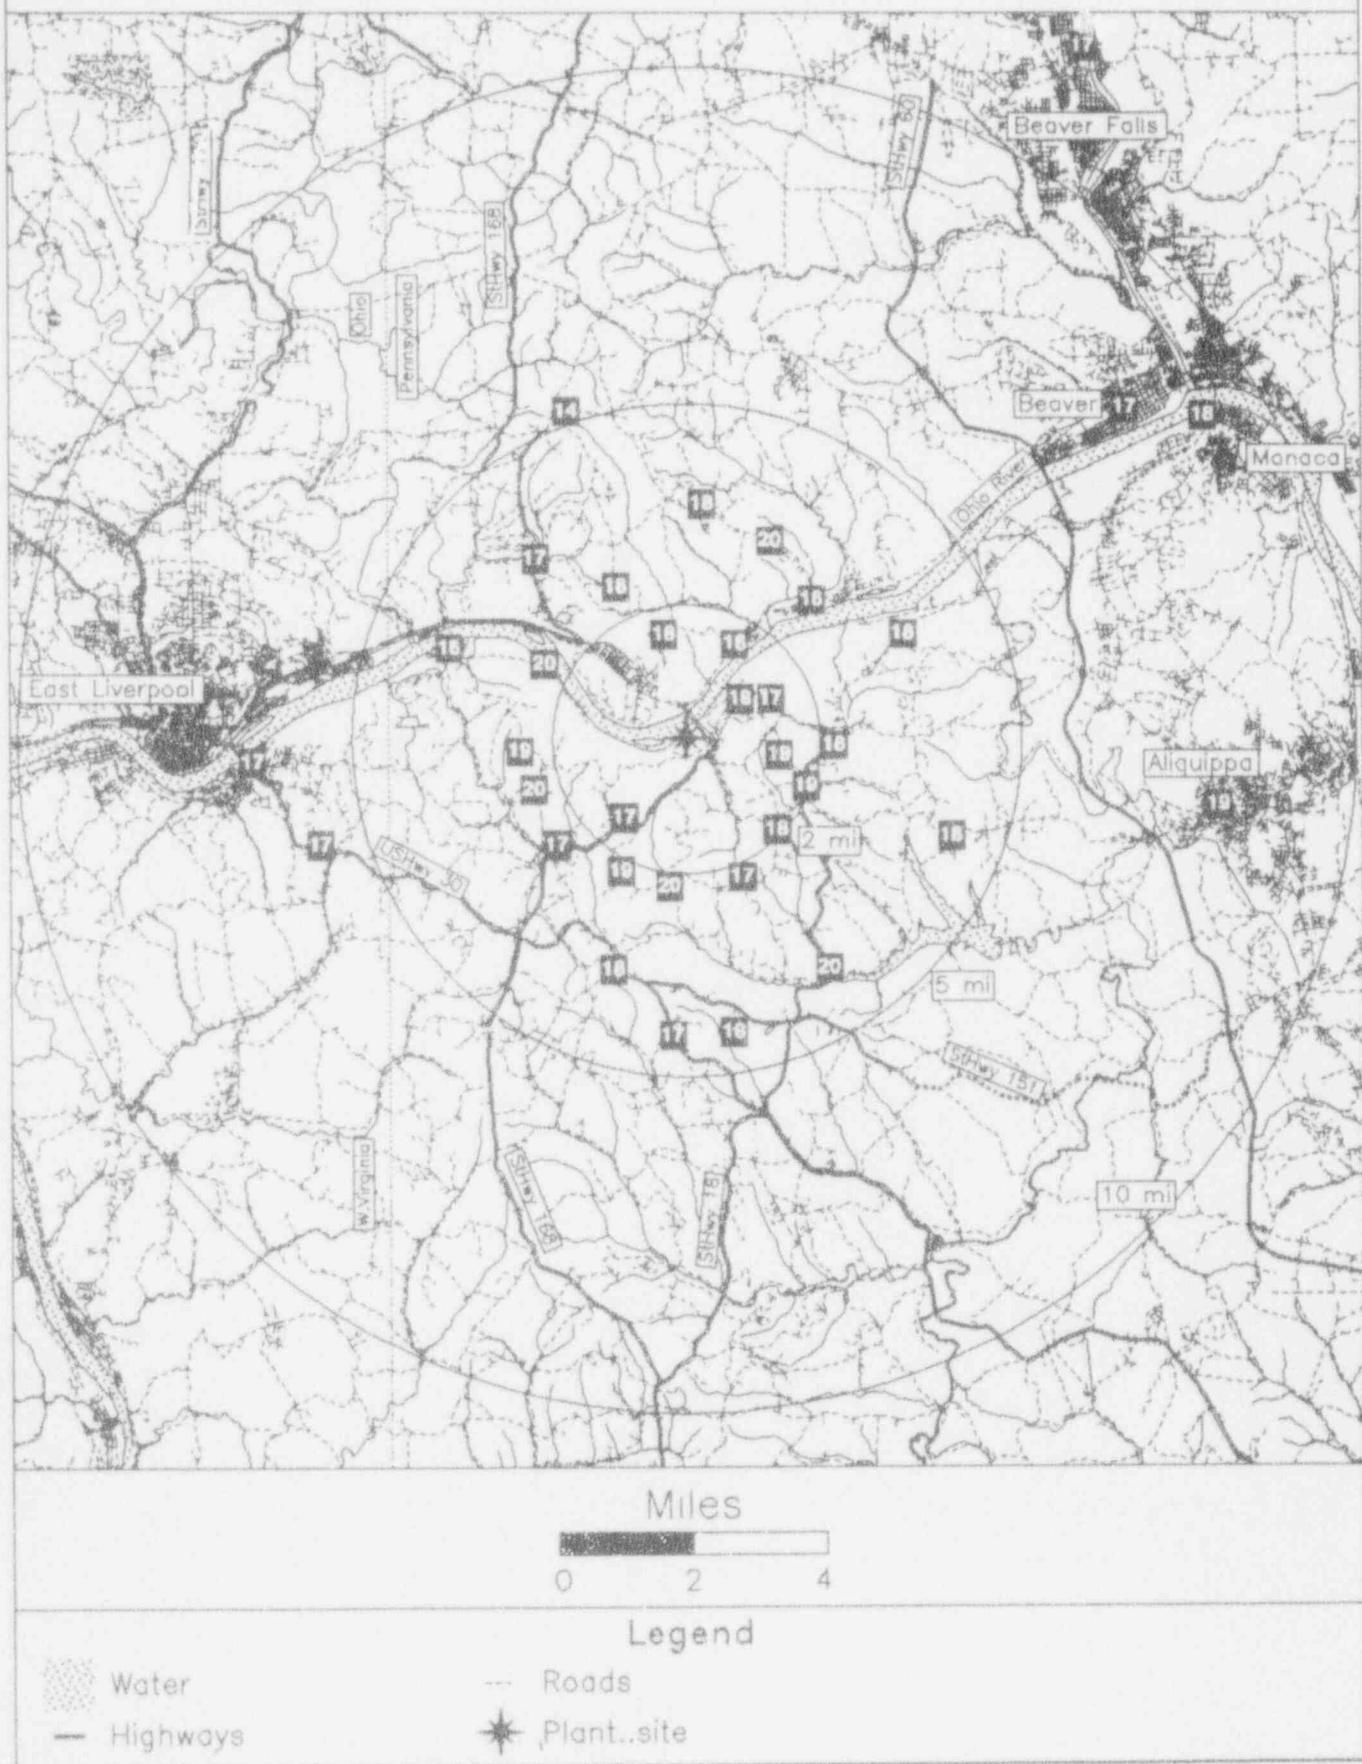

BIG ROCK

TLD Direct Radiation Environmental Monitoring
 For the period 930914-940127 136 Days
 Field Time: 96 Days

NRC Sta	Location	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	208	4.9 19.2 +- 0.6; 2.9	14.0 +- 0.6; 4.0	13.8 +- 1.6
2	220	3.6 17.6 +- 0.5; 2.6	12.5 +- 0.6; 3.8	12.7 +- 1.9
3	204	2.4 19.4 +- 0.6; 2.9	14.2 +- 0.6; 4.0	13.0 +- 2.2
4	176	3.3 18.6 +- 0.6; 2.8	13.5 +- 0.6; 3.9	12.7 +- 1.9
5	161	4.6 18.2 +- 0.5; 2.7	13.1 +- 0.6; 3.9	13.3 +- 1.9
6	133	4.7 21.3 +- 0.6; 3.2	16.0 +- 0.7; 4.2	14.4 +- 1.9
7	116	3.7 21.1 +- 0.6; 3.2	15.8 +- 0.7; 4.2	15.1 +- 2.0
8	111	4.7 21.6 +- 0.6; 3.2	16.3 +- 0.7; 4.2	14.7 +- 2.3
9	98	4.5 18.7 +- 0.6; 2.8	13.5 +- 0.6; 3.9	13.3 +- 1.8
10	88	12.0 18.8 +- 0.6; 2.8	13.6 +- 0.6; 3.9	12.7 +- 1.7
11	83	16.0 16.3 +- 0.5; 2.4	11.3 +- 0.6; 3.7	13.3 +- 2.3
12	83	16.0 16.5 +- 0.5; 2.5	11.5 +- 0.6; 3.7	12.9 +- 2.0
13	83	16.0 17.8 +- 0.5; 2.7	12.7 +- 0.6; 3.9	12.7 +- 1.7
14	77	3.4 18.2 +- 0.5; 2.7	13.1 +- 0.6; 3.9	12.1 +- 1.7
15	96	1.8 19.6 +- 0.6; 2.9	14.4 +- 0.6; 4.0	14.1 +- 1.9
16	118	2.0 20.2 +- 0.6; 3.0	14.9 +- 0.7; 4.1	13.9 +- 2.1
17	134	2.0 19.8 +- 0.6; 3.0	14.6 +- 0.7; 4.0	13.6 +- 1.7
18	222	1.9 16.4 +- 0.5; 2.5	11.4 +- 0.6; 3.7	12.4 +- 2.1
19	194	1.4 21.8 +- 0.7; 3.3	16.5 +- 0.7; 4.2	15.2 +- 2.0
20	179	1.5 18.8 +- 0.6; 2.8	13.7 +- 0.6; 4.0	13.4 +- 1.8
21	153	1.1 19.1 +- 0.6; 2.9	13.9 +- 0.6; 4.0	13.1 +- 1.6

Transit Dose = 4.3 +- 0.4; 3.1

BIG ROCK
For the period 930914-940127

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	No Data +- No Data	0
11.26 - 33.75 NNE	No Data +- No Data	0
33.76 - 56.25 NE	No Data +- No Data	0
56.26 - 78.75 ENE	13.1 +- 0.0	1
78.76 - 101.25 E	13.8 +- 0.5	3
101.26 - 123.75 ESE	15.7 +- 0.7	3
123.76 - 146.25 SE	15.3 +- 1.0	2
146.26 - 168.75 SSE	13.5 +- 0.6	2
168.76 - 191.25 S	13.6 +- 0.1	2
191.26 - 213.75 SSW	14.9 +- 1.4	3
213.76 - 236.25 SW	12.0 +- 0.8	2
236.26 - 258.75 WSW	No Data +- No Data	0
258.76 - 281.25 W	No Data +- No Data	0
281.26 - 303.75 WNW	No Data +- No Data	0
303.76 - 326.25 NW	No Data +- No Data	0
326.26 - 348.75 NNW	No Data +- No Data	0

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	14.2 +- 1.5	7
2 - 5	14.2 +- 1.3	10
> 5	13.6 +- 0.0	1
Upwind Control	11.8 +- 0.8	3

BIG ROCK
 TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	208	MICHIGAN 66
2	220	PETOSKY (US 31) & PROSPECT
3	204	COUNTY RD. 56
4	176	QUARTER LINE RD.
5	161	COUNTY RD. 56
6	133	QUARTER LINE RD. & MAPLE GROVE RD.
7	116	STOLT RD. & MAPLE GROVE RD.
8	111	STOLT RD. & MURRAY RD.
9	98	MURRAY RD & BAY SHORE RD.
10	88	PETOSKY (MI)
11	83	BAYVIEW (MI)
12	83	BAYVIEW (MI)
13	83	BAYVIEW (MI)
14	77	US 31
15	96	BURGESS RD.
16	118	OLD 31 RD.
17	134	OLD 31 RD.
18	222	PA-BA-SHAN LANE
19	194	NEAR US 31
20	179	US 31 (NEAR CHARLOVOIX ROD & GUN CLUB)
21	153	US 31

NRC TLD DOSES FOR BIG ROCK POINT AREA

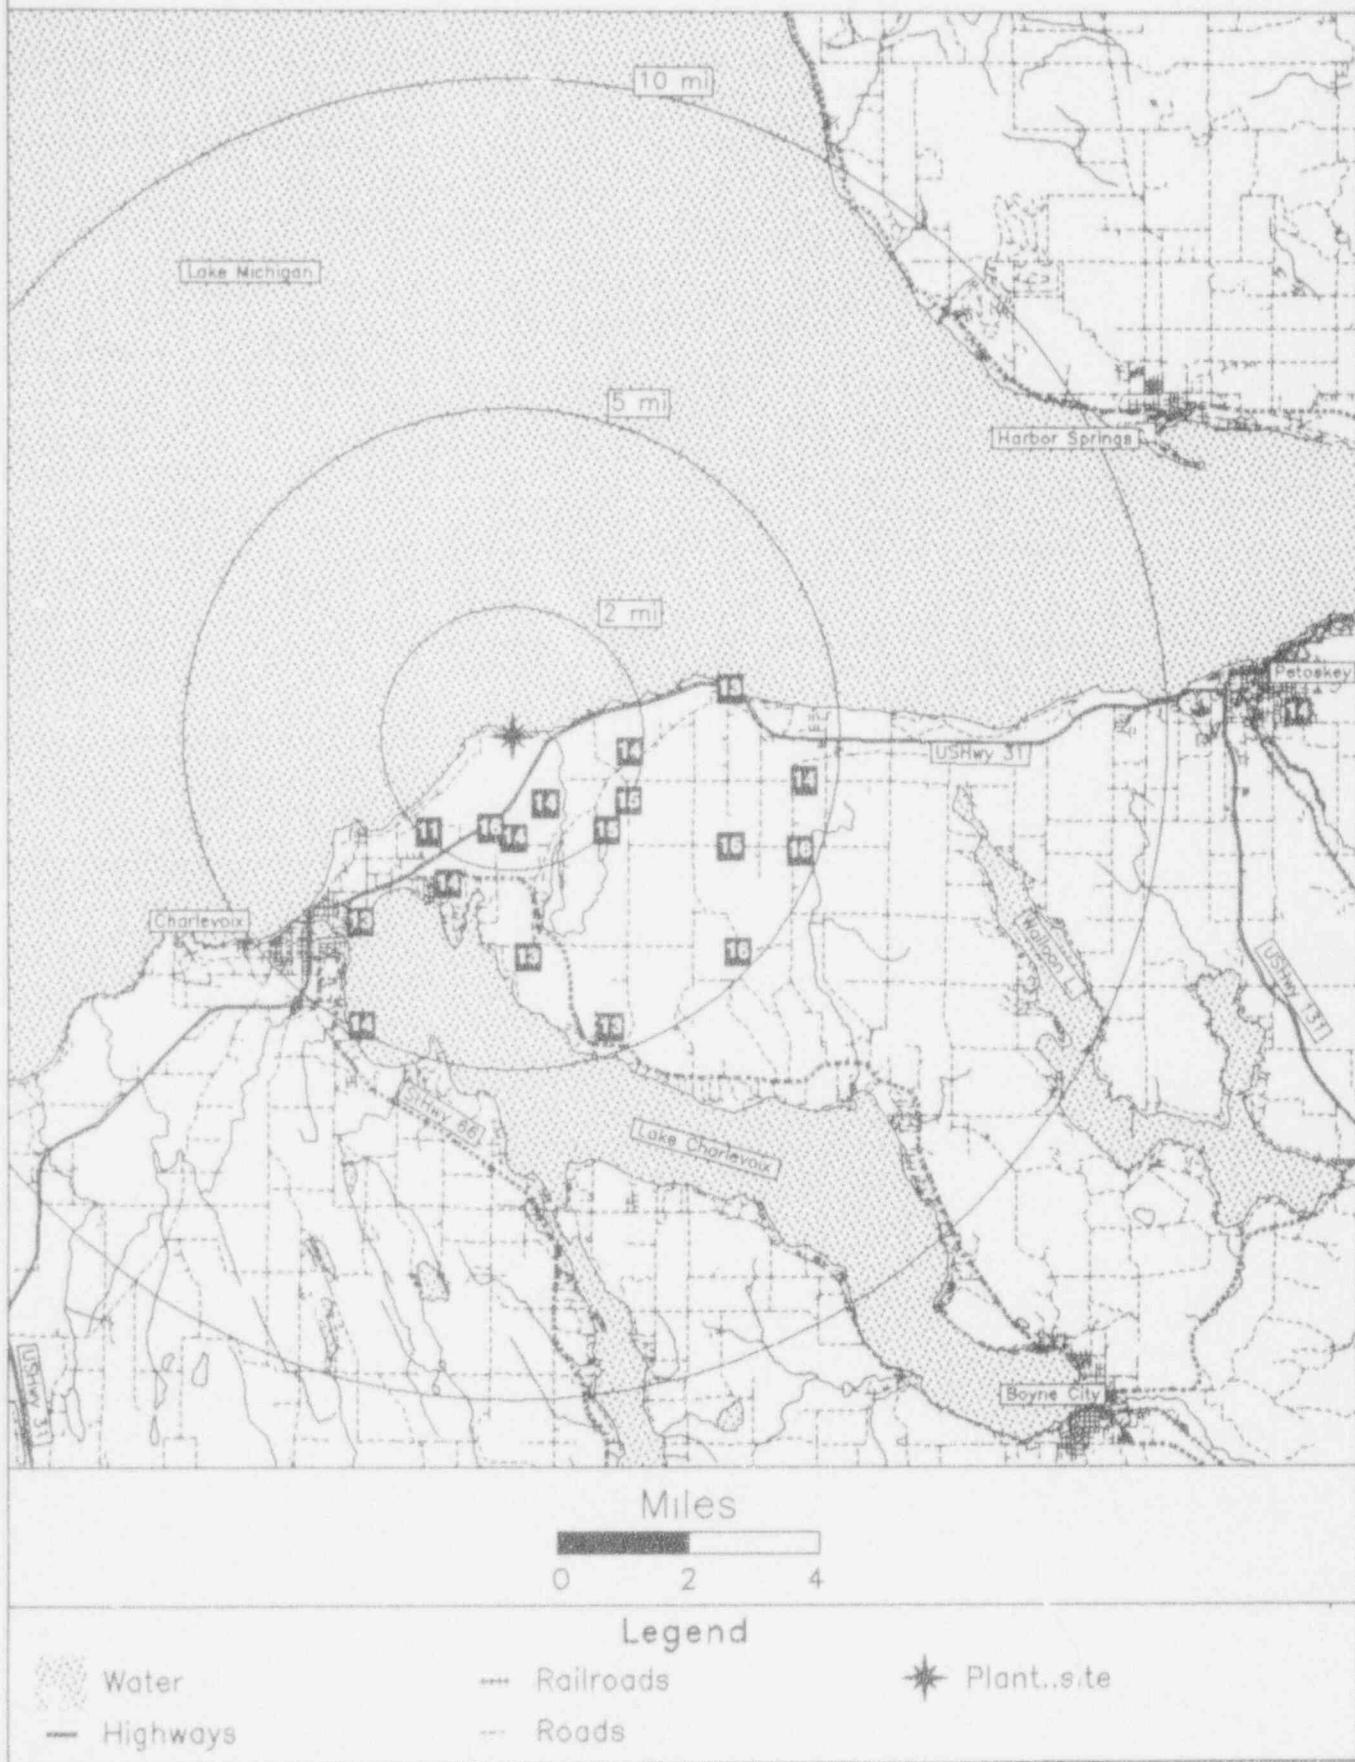

BRAIDWOOD

TLD Direct Radiation Environmental Monitoring
 For the period 930914-940202 142 Days
 Field Time: 100 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate		Hist. Range	
			(mR/Std. Qtr.) +-Rdm; Tot.	(mR/Std. Dev) +-1 Std Dev	Net Exp Rate	
1	28	0.8	18.7 +- 0.6; 2.8	10.0 +- 0.7; 4.1	14.0 +- 3.3	
2	29	1.3	22.1 +- 0.7; 3.3	13.0 +- 0.7; 4.4	14.8 +- 2.2	
3	53	2.0	17.7 +- 0.5; 2.6	9.0 +- 0.6; 4.0	12.4 +- 3.3	
4	72	2.1	23.6 +- 0.7; 3.5	14.4 +- 0.8; 4.5	14.9 +- 2.1	
5	87	2.0	21.8 +- 0.7; 3.3	12.8 +- 0.7; 4.4	14.5 +- 2.5	
6	119	2.5	18.1 +- 0.5; 2.7	9.4 +- 0.6; 4.0	14.0 +- 3.2	
7	133	3.3	24.0 +- 0.7; 3.6	14.7 +- 0.8; 4.6	15.0 +- 2.1	
8	151	3.3	22.0 +- 0.7; 3.3	12.9 +- 0.7; 4.4	14.2 +- 2.1	
9	172	3.9	23.2 +- 0.7; 3.5	14.1 +- 0.8; 4.5	18.9 +- 4.5	
10	197	2.8	21.5 +- 0.6; 3.2	12.5 +- 0.7; 4.3	15.1 +- 2.5	
11	212	1.4	21.8 +- 0.7; 3.3	12.7 +- 0.7; 4.3	14.0 +- 2.1	
12	232	1.0	20.7 +- 0.6; 3.1	11.8 +- 0.7; 4.3	13.8 +- 2.8	
13	255	1.0	22.7 +- 0.7; 3.4	13.6 +- 0.7; 4.4	13.9 +- 1.9	
14	278	1.2	23.9 +- 0.7; 3.6	14.6 +- 0.8; 4.5	14.7 +- 2.4	
15	310	1.3	22.5 +- 0.7; 3.4	13.4 +- 0.7; 4.4	14.5 +- 2.3	
16	342	1.3	18.0 +- 0.5; 2.7	9.3 +- 0.6; 4.0	12.3 +- 3.1	
17	8	1.5	22.5 +- 0.7; 3.4	13.4 +- 0.7; 4.4	14.6 +- 2.4	
18	18	3.5	23.6 +- 0.7; 3.5	14.4 +- 0.8; 4.5	18.2 +- 3.7	
19	42	6.3	19.7 +- 0.6; 3.0	10.9 +- 0.7; 4.2	13.7 +- 2.8	
20	69	5.7	22.8 +- 0.7; 3.4	13.7 +- 0.8; 4.4	15.8 +- 2.7	
21	86	7.0	23.7 +- 0.7; 3.5	14.4 +- 0.8; 4.5	16.9 +- 2.4	
22	103	11.4	20.5 +- 0.6; 3.1	11.6 +- 0.7; 4.2	16.0 +- 3.7	
23	45	4.9	24.1 +- 0.7; 3.6	14.8 +- 0.8; 4.6	15.5 +- 2.2	
24	70	4.2	23.0 +- 0.7; 3.5	13.9 +- 0.8; 4.5	14.5 +- 2.4	
25	86	4.1	18.0 +- 0.5; 2.7	9.4 +- 0.6; 4.0	12.7 +- 3.2	
26	125	5.0	18.4 +- 0.6; 2.8	9.7 +- 0.7; 4.1	13.5 +- 3.6	
27	142	7.2	Missing Dosimeter	No Net Data	17.0 +- 2.9	
28	161	6.1	23.5 +- 0.7; 3.5	14.3 +- 0.8; 4.5	14.7 +- 2.3	
29	180	5.9	24.7 +- 0.7; 3.7	15.4 +- 0.8; 4.6	19.1 +- 3.6	
30	187	5.8	27.7 +- 0.8; 4.2	18.1 +- 0.9; 4.9	20.0 +- 2.9	
31	225	5.4	25.5 +- 0.8; 3.8	16.1 +- 0.8; 4.7	17.5 +- 2.4	
32	253	4.0	23.3 +- 0.7; 3.5	14.2 +- 0.8; 4.5	15.2 +- 2.3	
33	289	4.1	24.0 +- 0.7; 3.6	14.8 +- 0.8; 4.6	16.6 +- 2.6	
34	315	4.0	24.0 +- 0.7; 3.6	14.7 +- 0.8; 4.6	16.0 +- 2.4	
35	333	4.0	18.5 +- 0.6; 2.8	9.8 +- 0.7; 4.1	15.1 +- 2.7	
36	0	5.5	22.6 +- 0.7; 3.4	13.5 +- 0.7; 4.4	14.9 +- 2.7	
37	21	5.0	16.7 +- 0.5; 2.5	8.1 +- 0.6; 3.9	12.6 +- 3.5	
38	224	14.7	21.2 +- 0.6; 3.2	12.3 +- 0.7; 4.3	14.2 +- 2.8	
39	224	14.7	21.0 +- 0.6; 3.1	12.0 +- 0.7; 4.3	14.0 +- 2.4	
40	187	10.3	26.2 +- 0.8; 3.9	16.8 +- 0.8; 4.8	18.1 +- 3.2	

Transit Dose = 7.5 +- 0.5; 3.6

BRAIDWOOD
For the period 930914-940202

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	13.4 +- 0.0	2
11.26 - 33.75 NNE	11.4 +- 2.8	4
33.76 - 56.25 NE	11.6 +- 3.0	3
56.26 - 78.75 ENE	14.0 +- 0.4	3
78.76 - 101.25 E	12.2 +- 2.6	3
101.26 - 123.75 ESE	10.5 +- 1.6	2
123.76 - 146.25 SE	12.2 +- 3.5	2
146.26 - 168.75 SSE	13.6 +- 0.9	2
168.76 - 191.25 S	15.8 +- 2.1	3
191.26 - 213.75 SSW	12.6 +- 0.2	2
213.76 - 236.25 SW	13.4 +- 2.4	3
236.26 - 258.75 WSW	13.9 +- 0.4	2
258.76 - 281.25 W	14.6 +- 0.0	1
281.26 - 303.75 WNW	14.8 +- 0.0	1
303.76 - 326.25 NW	14.0 +- 0.9	2
326.26 - 348.75 NNW	9.6 +- 0.4	2

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	12.2 +- 1.9	11
2 - 5	12.6 +- 2.4	16
> 5	14.0 +- 2.2	10
Upwind Control	14.4 +- 3.4	2

BRAIDWOOD
TLD Direct Radiation Environmental Monitoring

NRC Station	Location	Azimuth / Distance	Description
		Degree / Mile	
1	28	0.8	IL-53 9TH POLE S OF DIV. ST.
2	29	1.3	DIV. ST. & IL-129
3	53	2.0	ON IL-113 - 0.8 MI E. OF IL-53
4	72	2.1	ESSEX RD. - 0.5 MI S. OF IL-113
5	87	2.0	2ND POLE S. OF SMILEY RD & ESSEX RD
6	119	2.5	ESSEX RD. NR BRAIDWOOD TRAIN. CTR.
7	133	3.3	ESSEX RD (1.3 MI.S) / TAMMEN TREEBERRY FARM
8	151	3.3	COUNTY LINE / .5 MI W. OF ESSEX
9	172	3.9	W500N (PONDEROSA CLUB SIGN)
10	197	2.8	KANKAKEE RD & DONDANVILLE RD (W1900N & N600W)
11	212	1.4	KANKAKEE RD. NR HOUSE ON HILL
12	232	1.0	KANKAKEE RD. & RT. 53
13	255	1.0	KANKAKEE RD. JUST N. OF IL-129
14	278	1.2	KANKAKEE RD. UNDER TRANS. LINES
15	310	1.3	KANKAKEE RD. & IS-55 FRONTAGE
16	342	1.3	KENNEDY & ENGLISH STS.
17	8	1.5	BRAIDWOOD ELEM. SCH.
18	18	3.5	COAL CITY & NOVY RDS
19	42	6.3	WILMINGTON (MAIN STREET)
20	69	5.7	IL-102 & RIVALS TURNOFF
21	86	7.0	IL-102 & MANTENO RD.
22	103	11.4	IL-102 KANKAKEE ST PARK ENTRANCE
23	45	4.9	RIVER RD & JOHNSON RD
24	70	4.2	RIVER & IL-113
25	86	4.1	ZILM RD (351S & 224W)
26	125	5.0	ZILM RD/375 S & 224 W
27	142	7.2	W1400N & N300W
28	161	6.1	W1600N & N300W
29	180	5.9	ON N300W (2.2 MI PAST #28)
30	187	5.8	W1900N & N300W
31	225	5.4	RT 53, NORTH EDGE OF GARDNER
32	253	4.0	CARBON HILL RD & BRACERVILLE RD
33	289	4.1	CARBON HILL RD & GORMAN RD
34	315	4.0	NEAR COAL CITY WATER TOWER ON BROADWAY
35	333	4.0	5TH IN EILEEN BETW RR TRACKS
36	0	5.5	MURPHY & COOPER RDS
37	21	5.0	IL-129 S. OF I-55 (FIRST GRAVEL RD)
38	224	14.7	GROCERY STORE LOT IN DWIGHT
39	224	14.7	GROCERY STORE LOT IN DWIGHT
40	187	10.3	POLE AFTER "Y" OFF IL-17 AT REDDICK

NRC TLD DOSES FOR BRAIDWOOD AREA

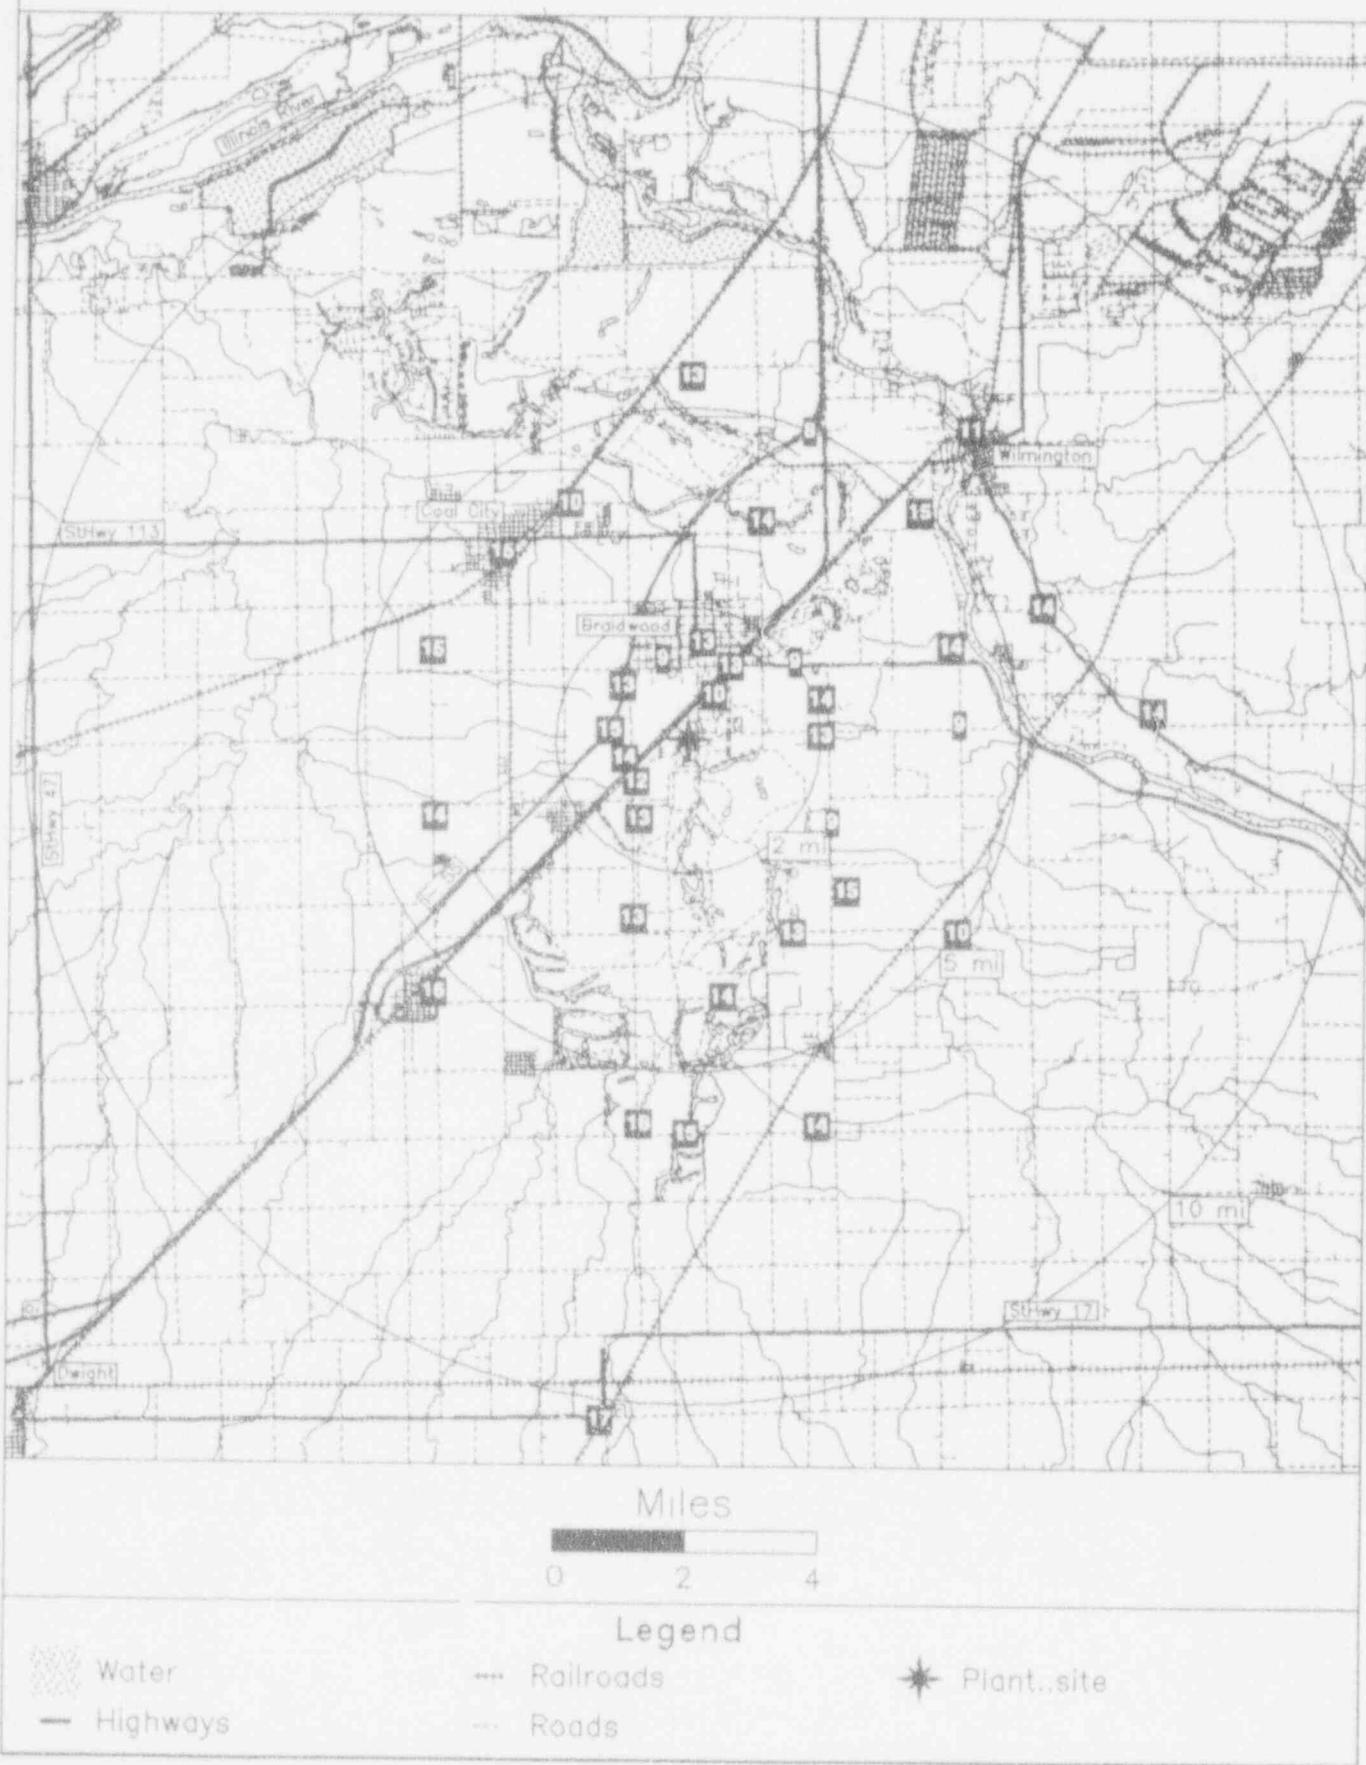

BROWNS FERRY
 TLD Direct Radiation Environmental Monitoring
 For the period 930915-940208 147 Days
 Field Time: 100 Days

NRC Sta	Location	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	130	9.0	19.4 +- 0.6; 2.9	14.2 +- 1.8
2	133	5.5	22.8 +- 0.7; 3.4	15.0 +- 2.0
3	153	4.3	19.5 +- 0.6; 2.9	14.6 +- 2.0
4	210	5.8	22.6 +- 0.7; 3.4	17.6 +- 2.2
5	220	6.0	21.0 +- 0.6; 3.2	15.0 +- 2.0
6	245	4.5	24.7 +- 0.7; 3.7	18.4 +- 2.3
7	269	1.9	22.2 +- 0.7; 3.3	16.4 +- 2.0
8	257	11.0	21.3 +- 0.6; 3.2	15.6 +- 2.0
9	295	7.0	20.8 +- 0.6; 3.1	16.4 +- 2.4
10	292	4.5	22.2 +- 0.7; 3.3	16.4 +- 2.0
11	269	1.9	22.4 +- 0.7; 3.4	16.6 +- 2.0
12	240	2.6	20.7 +- 0.6; 3.1	15.6 +- 2.1
13	220	1.7	Missing Dosimeter	No Net Data
14	268	17.0	22.3 +- 0.7; 3.3	18.7 +- 2.8
15	201	3.0	22.9 +- 0.7; 3.4	17.2 +- 2.1
16	181	3.0	20.1 +- 0.6; 3.0	17.1 +- 2.0
17	50	9.5	22.7 +- 0.7; 3.4	15.8 +- 2.3
18	51	3.5	21.7 +- 0.6; 3.2	17.3 +- 2.0
19	62	3.2	20.8 +- 0.6; 3.1	15.6 +- 1.8
20	86	2.8	24.8 +- 0.7; 3.7	16.2 +- 2.1
21	111	3.1	25.2 +- 0.8; 3.8	18.5 +- 2.1
22	64	1.1	25.8 +- 0.8; 3.9	19.2 +- 2.3
23	90	26.0	20.8 +- 0.6; 3.1	19.8 +- 2.1
24	111	0.8	24.4 +- 0.7; 3.7	16.7 +- 2.3
25	46	2.2	23.0 +- 0.7; 3.5	17.8 +- 1.9
26	26	1.7	26.2 +- 0.8; 3.9	17.9 +- 2.2
27	333	1.7	22.5 +- 0.7; 3.4	19.6 +- 2.4
28	335	1.0	21.9 +- 0.7; 3.3	18.2 +- 2.5
29	27	3.8	23.0 +- 0.7; 3.4	17.8 +- 2.1
30	0	4.0	20.5 +- 0.6; 3.1	15.1 +- 1.9
31	340	5.3	23.3 +- 0.7; 3.5	18.3 +- 2.1
32	312	12.0	22.6 +- 0.7; 3.4	17.8 +- 2.4
33	0	1.5	25.0 +- 0.7; 3.7	19.2 +- 2.1
34	52	7.0	21.8 +- 0.7; 3.3	16.4 +- 2.4
35	95	5.4	21.8 +- 0.7; 3.3	17.0 +- 2.1
36	68	5.6	23.0 +- 0.7; 3.4	17.9 +- 2.3
37	149	7.8	23.6 +- 0.7; 3.5	16.3 +- 2.0
38	164	7.0	19.3 +- 0.6; 2.9	13.8 +- 2.1

Transit Dose = 6.2 +- 0.4; 3.4

BROWNS FERRY
For the period 930915-940208

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	14.8 +- 2.8	2
11.26 - 33.75 NNE	16.5 +- 2.1	2
33.76 - 56.25 NE	14.4 +- 0.6	4
56.26 - 78.75 ENE	15.3 +- 2.2	3
78.76 - 101.25 E	14.6 +- 1.9	3
101.26 - 123.75 ESE	16.7 +- 0.5	2
123.76 - 146.25 SE	13.4 +- 2.2	2
146.26 - 168.75 SSE	13.1 +- 2.2	3
168.76 - 191.25 S	12.5 +- 0.0	1
191.26 - 213.75 SSW	14.9 +- 0.2	2
213.76 - 236.25 SW	13.3 +- 0.0	1
236.26 - 258.75 WSW	14.8 +- 2.6	2
258.76 - 281.25 W	14.5 +- 0.1	2
281.26 - 303.75 WNW	13.7 +- 0.9	2
303.76 - 326.25 NW	14.7 +- 0.0	1
326.26 - 348.75 NNW	14.7 +- 0.6	3

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	15.8 +- 1.6	8
2 - 5	14.4 +- 1.7	13
> 5	14.0 +- 1.2	14
Upwind Control	14.0 +- 0.7	2

BROWNS FERRY
TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	130 9.0	DECATUR
2	133 5.5	FINLEY IS. RD.
3	153 4.3	LEWIS LANE
4	210 5.8	TENN. VALLEY JR. HIGH SCHOOL
5	220 6.0	HILLSBORO
6	245 4.5	DAVID TEMPLE CH.
7	269 1.9	PORTER CEMETERY
8	257 11.0	COURTLAND HOSPITAL
9	295 7.0	SPRING CR. & LOCK RD.
10	292 4.5	MALLARD CR. RD.
11	269 1.9	LAKEVIEW CABINS
12	240 2.6	DAVIS FARM
13	220 1.7	BROWNS FERRY RD.
14	268 17.0	TOWN CREEK
15	201 3.0	BAKER BOTTOM RD.
16	181 3.0	STATE PIC STATION
17	50 9.5	ATHENS RD. & RT. 72
18	51 3.5	ATHENS RD. & COWFORD RD.
19	62 3.2	OAK GROVE CHURCH
20	36 2.8	COWFORD RD.
21	111 3.1	END OF COWFORD RD.
22	64 1.1	COX CEMETERY
23	90 26.0	HUNTSVILLE
24	111 0.8	BFNP METEOROLOGICAL TOWER
25	46 2.2	LAWNGATE
26	26 1.7	INTERSECTION ON LAWNGATE RD.
27	333 1.7	POPLAR PT.
28	335 1.0	PARADISE SHORES
29	27 3.8	SEVEN MILE POST RD. & RT. 24
30	0 4.0	RIPLEY CITY HALL
31	340 5.3	SNAKE RD.
32	312 12.0	ROLAND EZELL RESIDENCE
33	0 1.5	SHAW RD. & LAWNGATE RD.
34	52 7.0	TURNER CHAPEL SCHOOL
35	95 5.4	BEULAH BAY RD.
36	68 5.6	MOORESVILLE RD.
37	149 7.8	TVA SUBSTATION
38	164 7.0	TREE BETWEEN TRINITY TOWN HALL & FIRE CO.

NRC TLD DOSES FOR BROWNS FERRY AREA

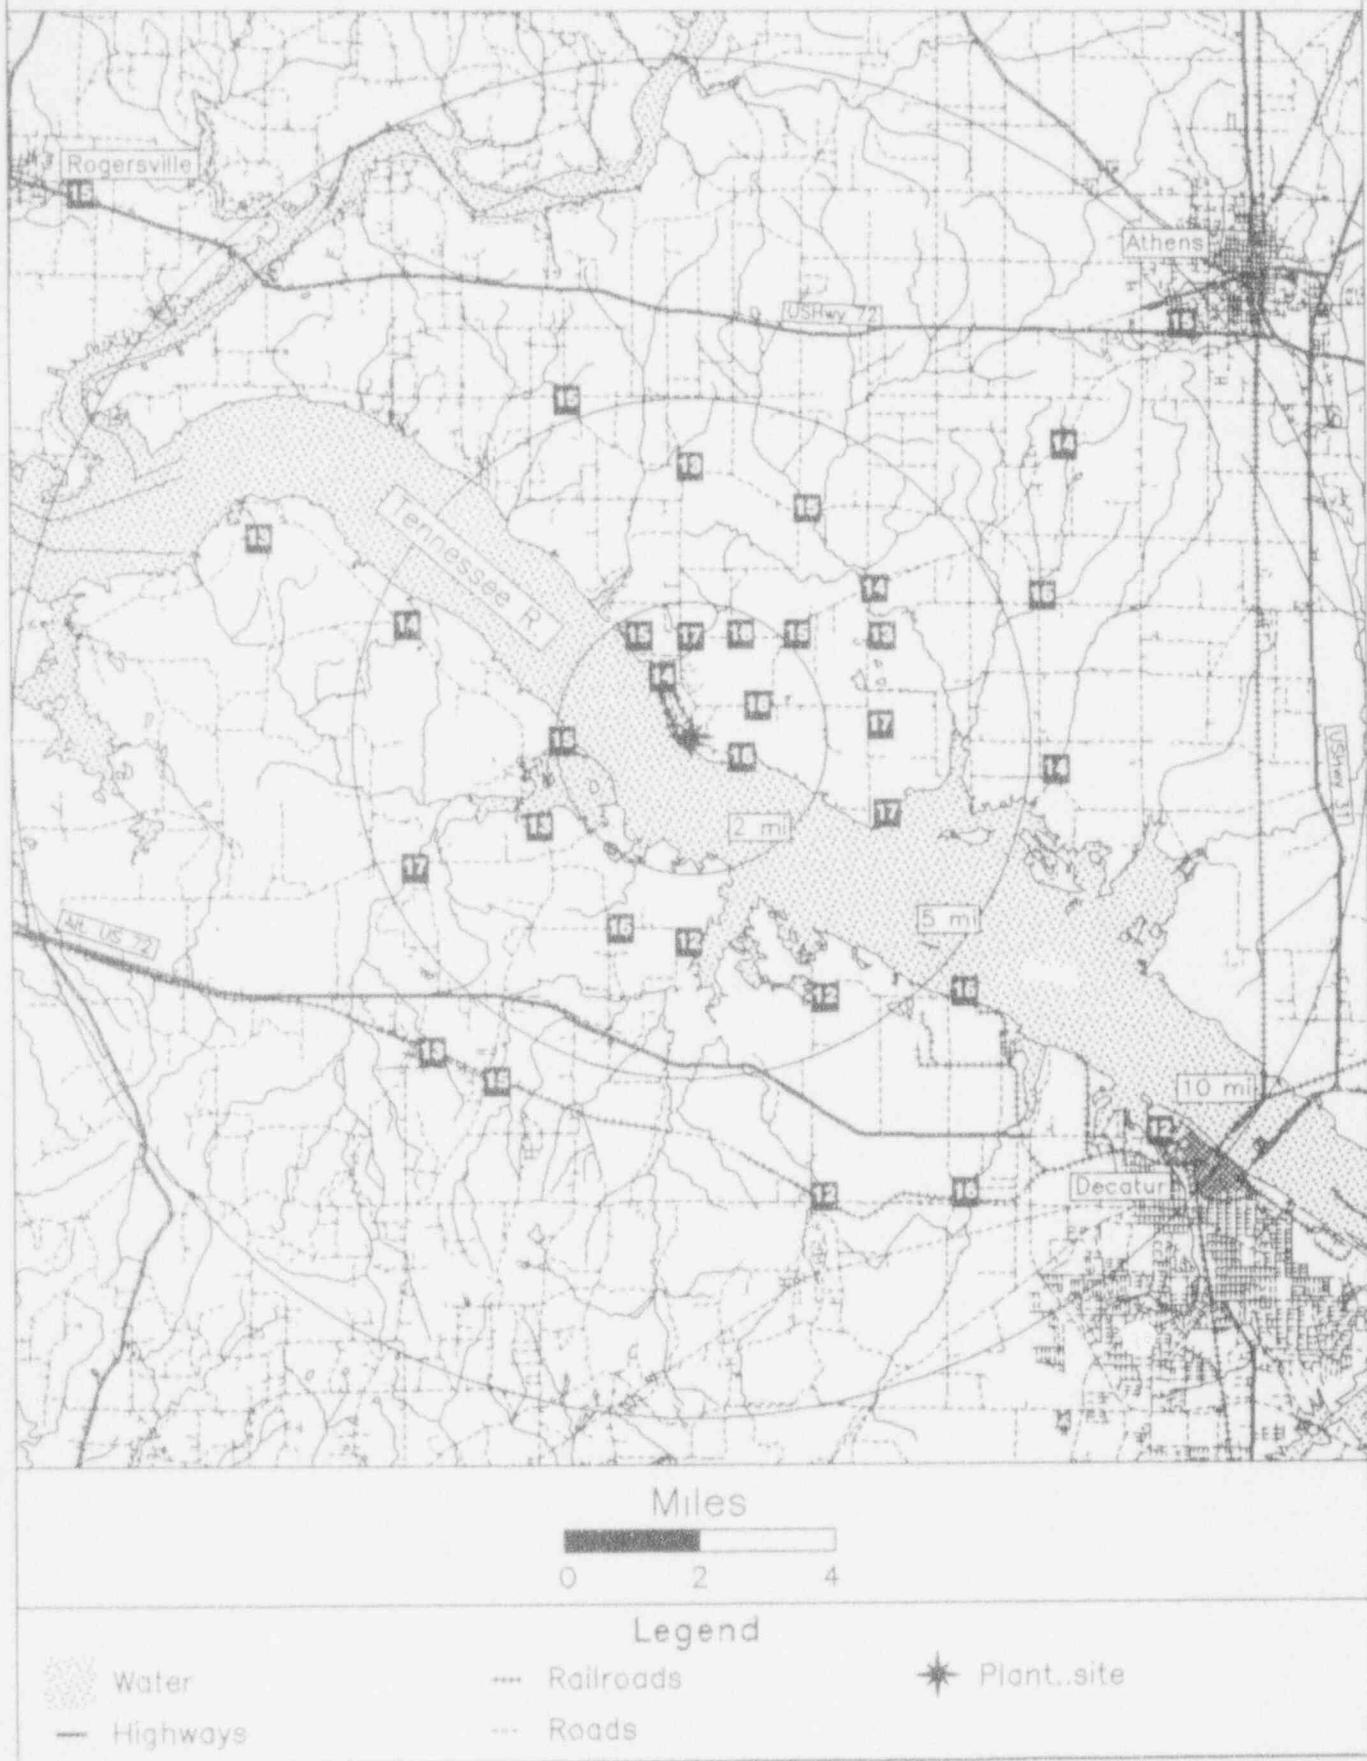

BRUNSWICK

TLD Direct Radiation Environmental Monitoring
 For the period 930915-940201 140 Days
 Field Time: 92 Days

NRC Sta	Location	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	260	2.2 14.2 +- 0.4; 2.1	8.3 +- 0.6; 3.7	10.5 +- 1.5
2	245	3.4 14.3 +- 0.4; 2.1	8.3 +- 0.6; 3.7	10.4 +- 1.5
3	231	3.8 Missing Dosimeter	No Net Data	10.2 +- 1.4
4	210	4.9 15.8 +- 0.5; 2.4	9.8 +- 0.6; 3.9	12.8 +- 1.5
5	186	4.3 15.8 +- 0.5; 2.4	9.8 +- 0.6; 3.9	12.6 +- 1.7
6	270	4.5 14.0 +- 0.4; 2.1	8.0 +- 0.6; 3.7	10.5 +- 1.3
7	272	4.4 14.6 +- 0.4; 2.2	8.7 +- 0.6; 3.8	11.3 +- 1.4
8	73	1.3 15.5 +- 0.5; 2.3	9.5 +- 0.6; 3.8	12.6 +- 1.5
9	97	1.0 15.6 +- 0.5; 2.3	9.6 +- 0.6; 3.8	12.4 +- 1.4
10	120	1.5 16.3 +- 0.5; 2.5	10.3 +- 0.6; 3.9	12.5 +- 1.4
11	131	0.9 15.8 +- 0.5; 2.4	9.8 +- 0.6; 3.9	12.2 +- 1.4
12	156	1.1 16.9 +- 0.5; 2.5	10.9 +- 0.6; 4.0	12.7 +- 1.5
13	180	1.1 15.2 +- 0.5; 2.3	9.2 +- 0.6; 3.8	11.8 +- 1.3
14	194	2.4 13.8 +- 0.4; 2.1	7.8 +- 0.6; 3.7	11.7 +- 1.5
15	201	2.0 15.3 +- 0.5; 2.3	9.3 +- 0.6; 3.8	11.2 +- 1.4
16	218	1.2 Missing Dosimeter	No Net Data	12.6 +- 1.5
17	252	1.1 16.2 +- 0.5; 2.4	10.2 +- 0.6; 3.9	12.3 +- 1.4
18	272	1.2 14.2 +- 0.4; 2.1	8.2 +- 0.6; 3.7	12.0 +- 1.6
19	19	1.1 14.8 +- 0.4; 2.2	8.8 +- 0.6; 3.8	11.4 +- 1.5
20	2	1.1 14.1 +- 0.4; 2.1	8.1 +- 0.6; 3.7	11.2 +- 1.7
21	288	1.3 14.4 +- 0.4; 2.2	8.4 +- 0.6; 3.7	10.6 +- 1.9
22	307	1.5 15.5 +- 0.5; 2.3	9.5 +- 0.6; 3.8	10.9 +- 1.4
23	338	2.1 15.5 +- 0.5; 2.3	9.5 +- 0.6; 3.8	11.9 +- 1.5
24	325	4.9 14.6 +- 0.4; 2.2	8.6 +- 0.6; 3.8	10.8 +- 1.3
25	338	3.8 16.2 +- 0.5; 2.4	10.2 +- 0.6; 3.9	11.9 +- 1.5
26	356	5.2 14.2 +- 0.4; 2.1	8.2 +- 0.6; 3.7	11.0 +- 1.3
27	30	6.4 14.9 +- 0.4; 2.2	8.9 +- 0.6; 3.8	10.7 +- 1.5
28	43	9.0 13.6 +- 0.4; 2.0	7.7 +- 0.6; 3.7	12.3 +- 1.9
29	50	8.5 14.2 +- 0.4; 2.1	8.2 +- 0.6; 3.7	11.7 +- 1.7
30	59	7.2 15.5 +- 0.5; 2.3	9.5 +- 0.6; 3.8	11.9 +- 1.6
31	65	6.5 15.3 +- 0.5; 2.3	9.3 +- 0.6; 3.8	11.9 +- 1.5
32	74	5.8 14.9 +- 0.4; 2.2	8.9 +- 0.6; 3.8	12.6 +- 1.8
33	88	4.1 Damaged Dosimeter	No Net Data	11.1 +- 1.7
34	12	17.0 15.9 +- 0.5; 2.4	9.9 +- 0.6; 3.9	12.4 +- 1.4
35	16	18.0 15.3 +- 0.5; 2.3	9.3 +- 0.6; 3.8	11.0 +- 1.5
36	284	15.0 16.4 +- 0.5; 2.5	10.4 +- 0.6; 3.9	12.3 +- 2.1
37	284	16.0 13.8 +- 0.4; 2.1	7.8 +- 0.6; 3.7	13.1 +- 1.7
38	284	15.0 14.6 +- 0.4; 2.2	8.6 +- 0.6; 3.8	12.1 +- 1.5
39	287	4.6 13.9 +- 0.4; 2.1	7.9 +- 0.6; 3.7	11.1 +- 1.4
40	271	0.7 16.5 +- 0.5; 2.5	10.5 +- 0.6; 3.9	13.2 +- 1.6

Transit Dose = 5.8 +- 0.4; 3.2

BRUNSWICK
For the period 930915-940201

TLD Direct Radiation Environmental Monitoring

Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	8.2 +- 0.1	2
11.26 - 33.75 NNE	9.2 +- 0.5	4
33.76 - 56.25 NE	8.0 +- 0.4	2
56.26 - 78.75 ENE	9.3 +- 0.3	4
78.76 - 101.25 E	9.6 +- 0.0	1
101.26 - 123.75 ESE	10.3 +- 0.0	1
123.76 - 146.25 SE	9.8 +- 0.0	1
146.26 - 168.75 SSE	10.9 +- 0.0	1
168.76 - 191.25 S	9.5 +- 0.4	2
191.26 - 213.75 SSW	9.0 +- 1.0	3
213.76 - 236.25 SW	No Data +- No Data	0
236.26 - 258.75 WSW	9.3 +- 1.3	2
258.76 - 281.25 W	8.7 +- 1.0	5
281.26 - 303.75 WNW	8.2 +- 0.3	2
303.76 - 326.25 NW	9.1 +- 0.6	2
326.26 - 348.75 NNW	9.9 +- 0.5	2


Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	9.5 +- 0.9	14
2 - 5	8.8 +- 0.9	11
> 5	8.9 +- 0.7	9
Upwind Control	9.0 +- 1.3	3

BRUNSWICK

TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	260	BEMC SUBSTATION RT. 133
2	245	HWY. 133 & RD. 1101
3	231	STANDARD PRODUCTS
4	210	CASWELL BEACH
5	186	FORT CASWELL DOCK
6	270	S. BRUNSWICK CO. LANDFILL
7	272	BRUNSWICK CO. LAND ON RT. 211
8	73	HWY. 1528 (INTAKE CANAL)
9	97	HWY. 1528 (S. OF CANAL)
10	120	RD. 1534
11	131	HWY. 1528 & RD. 1534
12	156	SUBSTATION (RT. 1528)
13	180	HWY. 1527
14	194	E. LEONARD & N. ATLANTIC ST.
15	201	E. 11TH ST.
16	218	HWY. 87 (N. OF HWY. 211)
17	252	HWY. 87 & BSEP ACCESS RD.
18	272	HWY. 87 (0.5 N. ACCESS RD.)
19	19	RD. 1525 (2.0 E. OF HWY. 87)
20	2	RD. 1525 (1.6 E. OF HWY. 87)
21	288	HWY. 87 (0.3 N. OF RD. 1525)
22	307	HWY. 87 (0.7 N. OF RD. 1525)
23	338	SUNNY PT. ACCESS RD.
24	325	BOILING SPRINGS LAKES
25	338	HWY. 133 & ORTON CR.
26	356	HWY. 133 (2 MILES N. OF ORTON CR.)
27	30	SUNNY PT. (N. GATE)
28	43	HWY. 421 (SNOW CUT)
29	50	RT. 421 & LUMBERTON ST.
30	59	RT. 421 & OCEAN VIEW DR.
31	65	KURE BEACH WATER TOWER
32	74	FORT FISHER AFB
33	88	FEDERAL PT. FERRY LANDING
34	12	SHIPYARD BLVD. & WORTH DR.
35	16	SHIPYARD BLVD. & NEWKIRK AVE.
36	284	SUPPLY (NC RT. 211 & RD. 1115)
37	284	SUPPLY (NC RT. 211 & RT. 17)
38	284	SUPPLY (NC RT. 17 & RD. 1115)
39	287	ANTIOCH BAPTIST CHURCH
40	271	0.5 MILES E. OF HWY. 87

NRC TLD DOSES FOR BRUNSWICK AREA

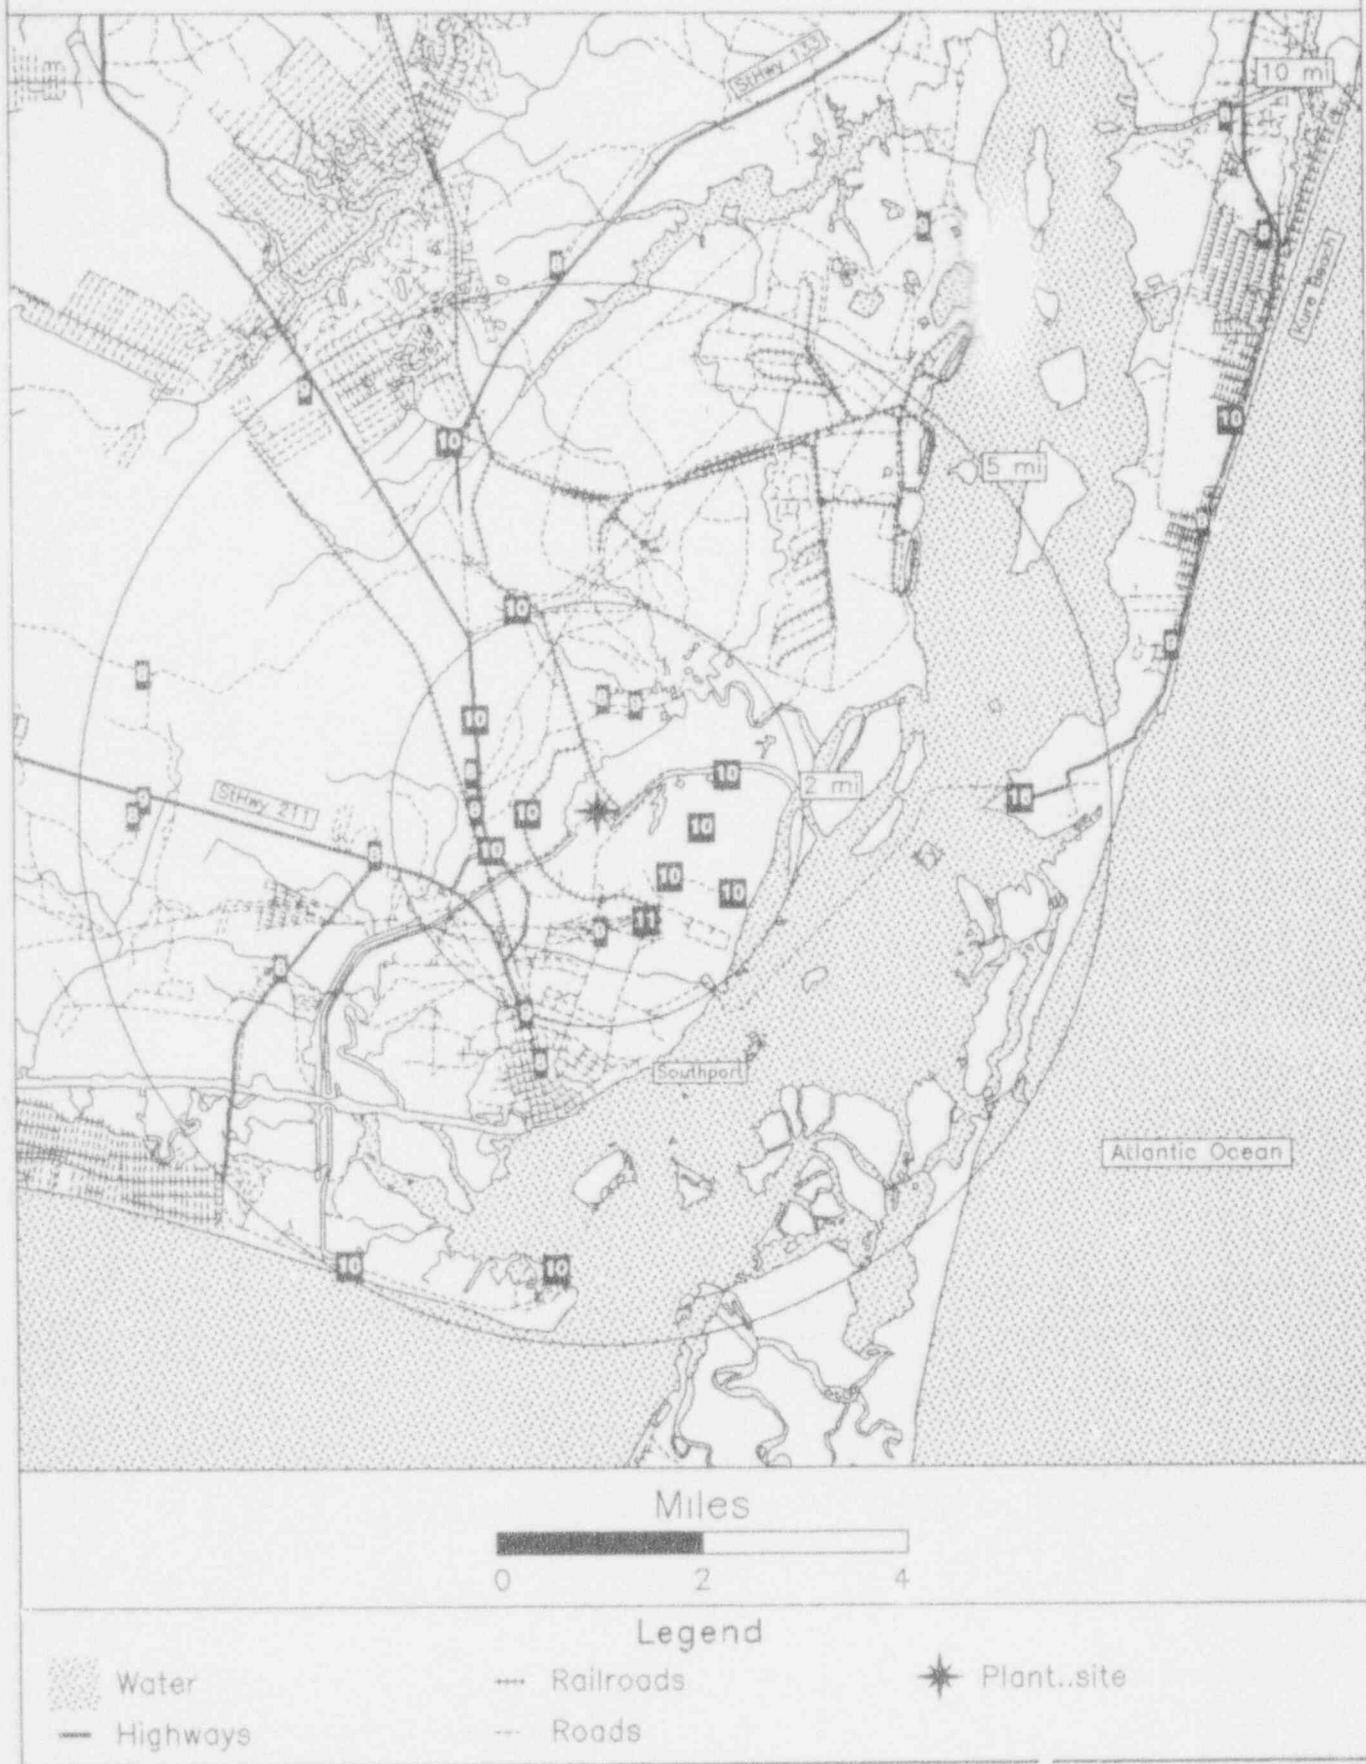

BYRON

TLD Direct Radiation Environmental Monitoring
 For the period 930914-940202 142 Days
 Field Time: 99 Days

NRC Sta	Location	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	10	1.1	24.7 +- 0.7; 3.7	19.3 +- 0.7; 4.4
2	27	1.0	23.6 +- 0.7; 3.5	18.3 +- 0.7; 4.3
3	53	1.6	22.2 +- 0.7; 3.3	17.0 +- 0.7; 4.2
4	68	1.6	27.6 +- 0.8; 4.1	21.9 +- 0.8; 4.7
5	97	1.4	29.0 +- 0.8; 4.2	22.2 +- 0.8; 4.8
6	120	1.3	26.0 +- 0.8; 3.9	20.4 +- 0.8; 4.6
7	146	1.4	28.3 +- 0.8; 4.2	22.5 +- 0.8; 4.8
8	175	2.2	25.1 +- 0.8; 3.8	19.6 +- 0.8; 4.5
9	177	0.6	21.6 +- 0.6; 3.2	16.5 +- 0.7; 4.1
10	183	0.5	27.0 +- 0.8; 4.0	21.3 +- 0.8; 4.7
11	193	0.6	26.1 +- 0.8; 3.9	20.5 +- 0.8; 4.6
12	220	0.9	23.1 +- 0.7; 3.5	17.9 +- 0.7; 4.3
13	239	0.8	22.6 +- 0.7; 3.4	17.3 +- 0.7; 4.2
14	262	0.7	26.4 +- 0.8; 4.0	20.8 +- 0.8; 4.6
15	283	0.8	25.2 +- 0.8; 3.8	19.7 +- 0.8; 4.5
16	303	1.0	23.0 +- 0.7; 3.5	17.8 +- 0.7; 4.3
17	326	1.6	24.0 +- 0.7; 3.6	18.6 +- 0.7; 4.3
18	23	4.0	20.9 +- 0.6; 3.1	15.8 +- 0.7; 4.0
19	17	4.1	19.2 +- 0.6; 2.9	14.3 +- 0.6; 3.9
20	5	4.3	Missing Dosimeter	No Net Data
21	340	4.2	21.2 +- 0.6; 3.2	16.1 +- 0.7; 4.1
22	322	4.9	25.9 +- 0.8; 3.9	20.4 +- 0.8; 4.5
23	298	6.9	21.2 +- 0.6; 3.2	16.1 +- 0.7; 4.1
24	262	4.8	20.6 +- 0.6; 3.1	15.5 +- 0.6; 4.0
25	244	4.6	21.7 +- 0.6; 3.2	16.5 +- 0.7; 4.1
26	224	4.8	21.3 +- 0.6; 3.2	16.1 +- 0.7; 4.1
27	208	5.2	18.8 +- 0.6; 2.8	13.9 +- 0.6; 3.8
28	209	14.0	19.9 +- 0.6; 3.0	14.9 +- 0.6; 3.9
29	215	13.0	22.5 +- 0.7; 3.4	17.2 +- 0.7; 4.2
30	215	13.0	23.2 +- 0.7; 3.5	17.9 +- 0.7; 4.3
31	204	4.6	18.6 +- 0.6; 2.8	13.7 +- 0.6; 3.8
32	178	4.4	18.9 +- 0.6; 2.8	14.0 +- 0.6; 3.9
33	155	3.9	23.2 +- 0.7; 3.5	17.9 +- 0.7; 4.3
34	138	4.6	24.0 +- 0.7; 3.6	18.6 +- 0.7; 4.3
35	118	4.4	23.6 +- 0.7; 3.5	18.3 +- 0.7; 4.3
36	81	3.8	22.1 +- 0.7; 3.3	16.9 +- 0.7; 4.2
37	70	5.5	22.3 +- 0.7; 3.3	17.1 +- 0.7; 4.2
38	45	4.0	20.3 +- 0.6; 3.0	15.2 +- 0.6; 4.0
39	40	6.8	23.7 +- 0.7; 3.6	18.4 +- 0.7; 4.3
40	45	15.0	19.0 +- 0.6; 2.9	14.1 +- 0.6; 3.9
41	220	3.0	26.4 +- 0.8; 4.0	20.8 +- 0.8; 4.6

Transit Dose = 3.5 +- 0.4; 3.2

BYRON

For the period 930914-940202

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	19.3 +- 0.0	1
11.26 - 33.75 NNE	16.1 +- 2.0	3
33.76 - 56.25 NE	16.2 +- 1.9	4
56.26 - 78.75 ENE	19.5 +- 3.5	2
78.76 - 101.25 E	19.6 +- 3.8	2
101.26 - 123.75 ESE	19.4 +- 1.5	2
123.76 - 146.25 SE	20.6 +- 2.7	2
146.26 - 168.75 SSE	17.9 +- 0.0	1
168.76 - 191.25 S	17.9 +- 3.3	4
191.26 - 213.75 SSW	16.1 +- 3.9	3
213.76 - 236.25 SW	18.3 +- 2.4	3
236.26 - 258.75 WSW	16.9 +- 0.6	2
258.76 - 281.25 W	18.2 +- 3.7	2
281.26 - 303.75 WNW	17.9 +- 1.8	3
303.76 - 326.25 NW	19.5 +- 1.2	2
326.26 - 348.75 NNW	16.1 +- 0.0	1

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	19.5 +- 2.0	16
2 - 5	16.9 +- 2.2	16
> 5	15.9 +- 1.9	5
Upwind Control	16.7 +- 1.6	3

BYRON
TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Degree /	Distance Mile	Description
1	10	1.1	CLOSEST DOWNWIND RES. OFF GERMAN CHURCH RD
2	27	1.0	GERMAN CHURCH RD. NORTH OF PLANT
3	53	1.6	WOODBINE&BLACK WALNUT RDS.
4	68	1.6	BLACK WALNUT RD.
5	97	1.4	BLACK WALNUT RD.
6	120	1.3	BLACK WALNUT RD.
7	146	1.4	HOLCOMB RD.
8	175	2.2	GERMAN CHURCH RD. (CLOSEST DAIRY)
9	177	0.6	DEERPATH RD.
10	183	0.5	DEERPATH RD.
11	193	0.6	DEERPATH RD.
12	220	0.9	RAZORVILLE RD.
13	239	0.8	RAZORVILLE RD.
14	262	0.7	RAZORVILLE RD.
15	283	0.8	RAZORVILLE RD.
16	303	1.0	RAZORVILLE RD.
17	326	1.6	RAZORVILLE RD.
18	23	4.0	BYRON WATER TOWER ON MARKET ST.
19	17	4.1	ACROSS FROM HIGH SCHOOL ON COLFAX ST.
20	5	4.3	E. MILL RD
21	340	4.2	CONGER RD/IL 72
22	322	4.9	IL 72/STONE SCH RD
23	298	6.9	IL 72 IN LEAF RIVER
24	262	4.8	SILVER CR RD (S. OF MIDTOWN RD)
25	244	4.6	LIMEKILN RD
26	224	4.8	IL 64
27	208	5.2	4TH/ADAMS (OREGON)
28	209	14.0	IL 2/BROAD ST.
29	215	13.0	RIDGE RD/HOUSE RD
30	215	13.0	RIDGE RD/HOUSE RD
31	204	4.6	IL 64
32	178	4.4	IL 64/GERMAN CHURCH RD
33	155	3.9	BRICK RD & ROCK HOLLOW RD
34	138	4.6	BRICK RD/CHANIA RD
35	118	4.4	STILLMAN RD
36	81	3.8	WELD PARK RD/COX RD
37	70	5.5	IL 72/STILLMAN RD
38	45	4.0	IL 72/KISHWAUKEE RD
39	40	6.8	CRESTVIEW RD. 0.9 MI N. OF KISHWAUKEE
40	45	15.0	US 251 S. OF US 20 (ROCKFORD)
41	220	3.0	RIVER RD NEAR STATE PARK

NRC TLD DOSES FOR BYRON AREA

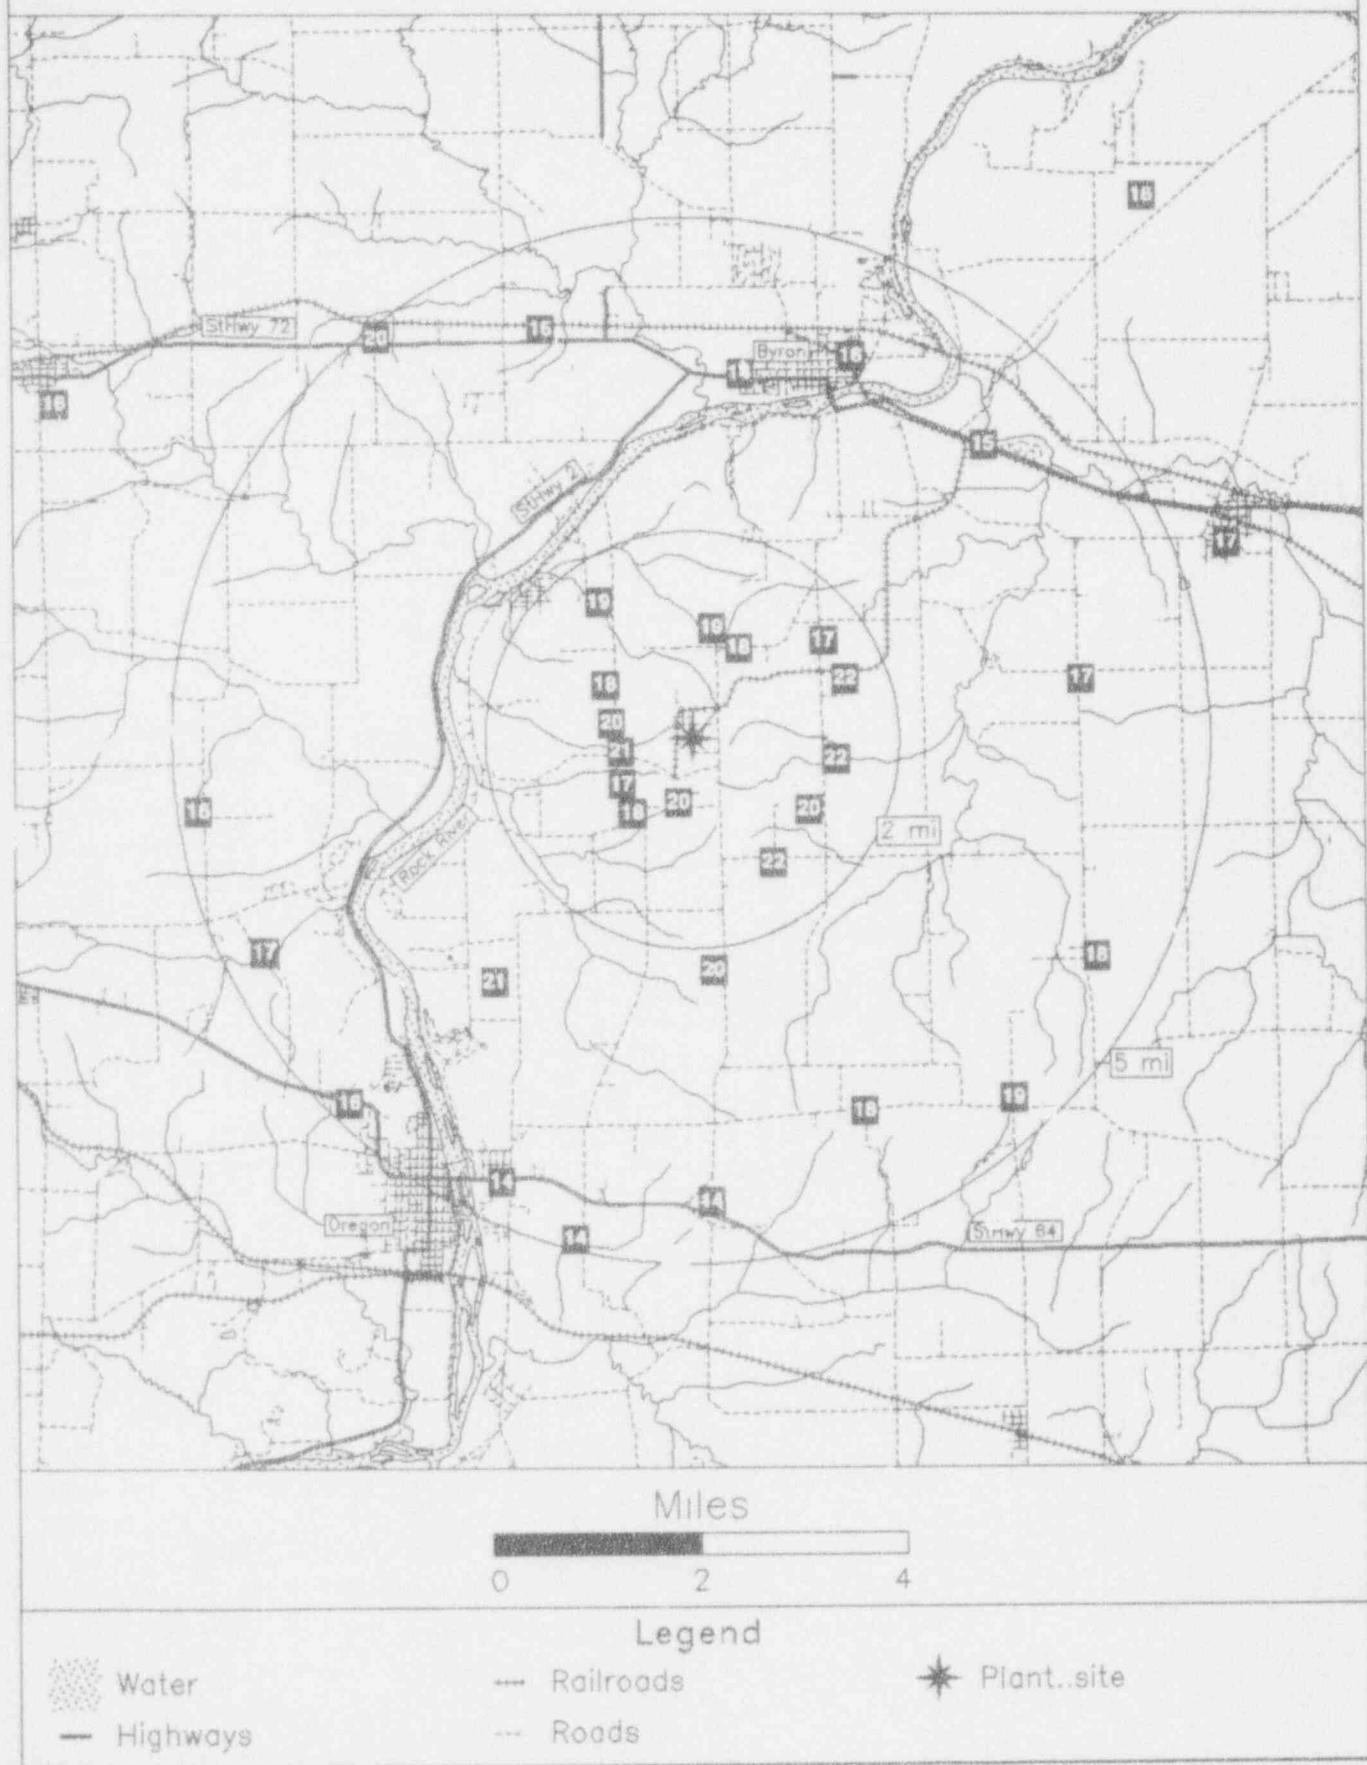

CALLAWAY

TLD Direct Radiation Environmental Monitoring
 For the period 930914-940208 148 Days
 Field Time: 97 Days

NRC Sta	Location	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	247	2.1	31.1 +- 0.9; 4.7	22.8 +- 1.0; 5.3
2	259	1.4	28.8 +- 0.9; 4.3	20.6 +- 0.9; 5.1
3	282	1.3	29.7 +- 0.9; 4.5	21.5 +- 0.9; 5.2
4	304	1.3	29.4 +- 0.9; 4.4	21.2 +- 0.9; 5.2
5	330	1.7	23.6 +- 0.7; 3.5	15.9 +- 0.8; 4.5
6	1	1.7	24.0 +- 0.7; 3.6	16.2 +- 0.8; 4.6
7	23	2.0	24.9 +- 0.7; 3.7	17.0 +- 0.8; 4.7
8	77	0.7	25.6 +- 0.8; 3.8	17.7 +- 0.8; 4.7
9	85	1.4	25.2 +- 0.8; 3.8	17.3 +- 0.8; 4.7
10	98	1.5	24.0 +- 0.7; 3.6	16.2 +- 0.8; 4.6
11	121	2.0	29.3 +- 0.9; 4.4	21.1 +- 0.9; 5.1
12	140	2.0	27.9 +- 0.8; 4.2	19.8 +- 0.9; 5.0
13	158	2.5	24.3 +- 0.7; 3.6	16.5 +- 0.8; 4.6
14	183	3.7	Damaged Dosimeter	No Net Data
15	188	1.7	25.1 +- 0.8; 3.8	17.2 +- 0.8; 4.7
16	202	0.7	24.5 +- 0.7; 3.7	16.7 +- 0.8; 4.6
17	237	0.7	28.7 +- 0.9; 4.3	20.6 +- 0.9; 5.1
18	312	11.0	24.3 +- 0.7; 3.6	16.5 +- 0.8; 4.6
19	292	10.0	24.1 +- 0.7; 3.6	16.3 +- 0.8; 4.6
20	268	9.0	25.8 +- 0.8; 3.9	17.9 +- 0.8; 4.7
21	247	8.0	30.7 +- 0.9; 4.6	22.5 +- 0.9; 5.1
22	225	8.0	24.8 +- 0.7; 3.7	16.9 +- 0.8; 4.7
23	220	8.0	25.2 +- 0.8; 3.8	17.3 +- 0.8; 4.7
24	205	5.5	23.2 +- 0.7; 3.5	15.5 +- 0.8; 4.5
25	157	4.0	30.8 +- 0.9; 4.6	22.5 +- 0.9; 5.3
26	134	5.0	24.2 +- 0.7; 3.6	16.4 +- 0.8; 4.6
27	115	4.2	30.3 +- 0.9; 4.5	22.0 +- 0.9; 5.2
28	95	3.5	30.5 +- 0.9; 4.6	22.2 +- 0.9; 5.3
29	67	3.4	26.7 +- 0.8; 4.0	18.7 +- 0.8; 4.9
30	48	4.5	23.7 +- 0.7; 3.6	15.9 +- 0.8; 4.5
31	14	6.5	26.9 +- 0.8; 4.0	18.9 +- 0.9; 4.9
32	2	5.1	25.6 +- 0.8; 3.8	17.7 +- 0.8; 4.7
33	335	3.6	23.3 +- 0.7; 3.5	15.6 +- 0.8; 4.5
34	288	4.3	27.1 +- 0.8; 4.1	19.1 +- 0.9; 4.9
35	310	5.2	26.0 +- 0.8; 3.9	18.1 +- 0.8; 4.8
36	264	3.2	24.6 +- 0.7; 3.7	16.8 +- 0.8; 4.6
37	237	3.0	29.2 +- 0.9; 4.4	21.1 +- 0.9; 5.1
38	270	15.0	27.8 +- 0.8; 4.2	19.8 +- 0.9; 5.0
39	270	15.0	29.1 +- 0.9; 4.4	21.0 +- 0.9; 5.1
40	203	20.0	26.0 +- 0.8; 3.9	18.1 +- 0.8; 4.8

Transit Dose = 6.5 +- 0.4; 3.4

CALLAWAY

For the period 930914-940208

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	17.0 +- 1.1	2
11.26 - 33.75 NNE	18.0 +- 1.3	2
33.76 - 56.25 NE	15.9 +- 0.0	1
56.26 - 78.75 ENE	18.2 +- 0.8	2
78.76 - 101.25 E	18.6 +- 3.2	3
101.26 - 123.75 ESE	21.6 +- 0.7	2
123.76 - 146.25 SE	18.1 +- 2.4	2
146.26 - 168.75 SSE	19.5 +- 4.3	2
168.76 - 191.25 S	17.2 +- 0.0	1
191.26 - 213.75 SSW	16.1 +- 0.8	2
213.76 - 236.25 SW	17.1 +- 0.3	2
236.26 - 258.75 WSW	21.7 +- 1.1	4
258.76 - 281.25 W	18.4 +- 2.0	3
281.26 - 303.75 WNW	18.9 +- 2.6	3
303.76 - 326.25 NW	18.6 +- 2.4	3
326.26 - 348.75 NNW	15.7 +- 0.2	2

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	18.5 +- 2.2	14
2 - 5	19.1 +- 2.9	12
> 5	17.7 +- 1.9	10
Upwind Control	19.6 +- 1.4	3

CALLAWAY
TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	247	HWY CC ON PN 18769
2	259	HWY CC ON PN 18747
3	282	HWY AD ON PN 185580
4	304	HWY CC ON PN 18450
5	330	HWY CC AND O - PN 28613
6	1	RT O AND DD - PN 28139
7	23	RT O - UNION CITY ST. - PN 31094
8	77	RT DD - PN 28151
9	85	RT DD - GRAVEL RD - PN 30956
10	98	RT DD - CONSERVATION PARKING LOT
11	121	RT DD - PN 2 N 310
12	140	RT DD - PN 06871
13	158	RT DD - PN 06851
14	183	RT DD & HWY 94 - PN 06754
15	188	RT 336(MICRO TWR) PN-18716
16	202	RT 336(HEAVY HAUL RD) NO #
17	237	RT 336-NO PN-NEAR PARK LOT
18	312	NE OF FULTON ON Z-PN21544
19	292	RT C-S. OF FULTON- NO PN
20	268	RT C - PN 53655
21	247	RT C - RANCH HOUSE PN 5/40
22	225	RT C-S CALLOWAY RII SCH PN5/25K
23	220	RT C-RIVERVIEW NURS HM PN 5V/1
24	205	RT C - HWY 66 & KATY TRAIL TELEPHONE POST
25	157	HWY 94-NEAR GRAY BARN PN 12182
26	134	PORTLAND-NEAR CH BELL PN 125/11
27	115	HWY 94 & RT D - PN 11935
28	95	RT D - PN 13000
29	67	RT D - PN 12955
30	48	RT D (PAST RT K) PN 12818
31	14	YUCATAN BAPTIST CH. PN 12670
32	2	BEFORE MOHEGAN RD. PN 19139
33	335	RT CC - POLE(L. SIDE OF RD)
34	288	RT O - PN 18145
35	310	GRAVEL RD. - PN 17516
36	264	RT AD - BRIDGE POST(RT. SIDE)
37	237	RT CC - POLE AT X SEC WITH SIDE RD.
38	270	CHURCH AT HWY OLD 63 & GLENWOOD DR. (NB0049)
39	270	NEW BLOOMFIELD - BEHIND STORE
40	203	HOLTS SUMMIT-BY CHIROPRACTIC CLINIC

NRC TLD DOSES FOR CALLAWAY AREA

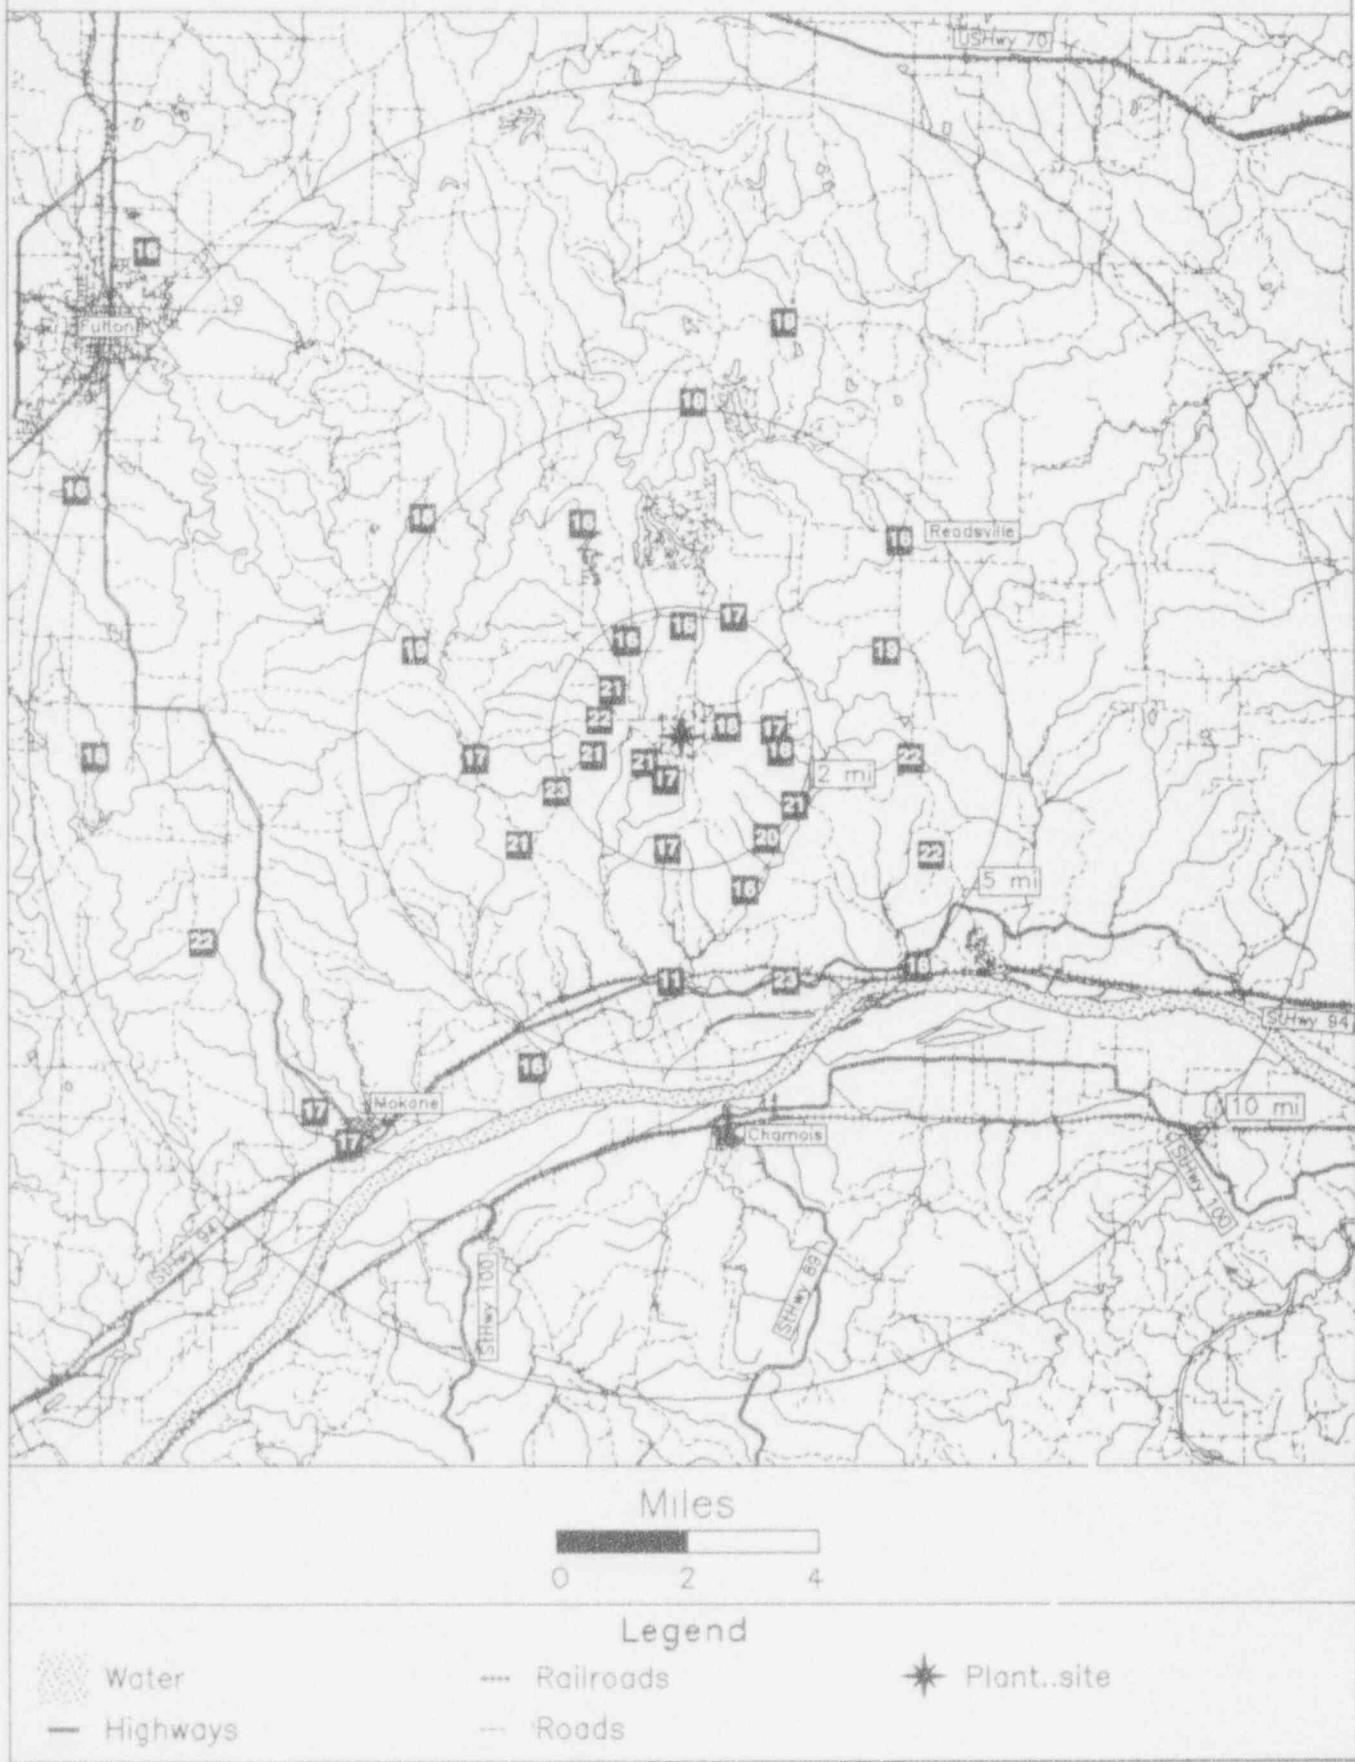

CALVERT CLIFFS

TLD Direct Radiation Environmental Monitoring
For the period 930915-940203 142 Days
Field Time: 99 Days

NRC Sta	Location		Gross			Net Exposure Rate			Hist. Range	
	Azimuth/Dist (Deg)/ (Mi)		Exposure (mR) +-Rdm; Tot.			(mR/Std. Qtr.) +-Rdm; Tot.			Net Exp Rate +/-1 Std Dev	
1	275	1.5	20.4	+-	0.6;	3.1	16.2	+-	0.6;	3.9
3	284	1.7	20.6	+-	0.6;	3.1	16.4	+-	0.6;	4.0
4	323	2.4	18.6	+-	0.6;	2.8	14.6	+-	0.6;	3.8
5	297	3.1	21.1	+-	0.6;	3.2	16.9	+-	0.6;	4.0
6	324	4.7	21.7	+-	0.7;	3.3	17.4	+-	0.7;	4.1
7	324	5.5	18.1	+-	0.5;	2.7	14.2	+-	0.6;	3.7
8	256	6.1	19.4	+-	0.6;	2.9	15.4	+-	0.6;	3.9
9	273	4.1	17.9	+-	0.5;	2.7	14.0	+-	0.6;	3.7
10	253	3.7	21.9	+-	0.7;	3.3	17.6	+-	0.7;	4.1
11	230	4.0	19.7	+-	0.6;	3.0	15.6	+-	0.6;	3.9
12	243	1.3	19.6	+-	0.6;	2.9	15.6	+-	0.6;	3.9
13	222	1.5	22.6	+-	0.7;	3.4	18.3	+-	0.7;	4.2
14	208	1.8	17.5	+-	0.5;	2.6	13.7	+-	0.6;	3.7
15	176	2.4	25.0	+-	0.7;	3.7	20.4	+-	0.7;	4.4
16	160	1.5	21.1	+-	0.6;	3.2	16.9	+-	0.6;	4.0
19	159	3.8	19.6	+-	0.6;	2.9	15.5	+-	0.6;	3.9
20	139	4.7	20.0	+-	0.6;	3.0	15.9	+-	0.6;	3.9
21	201	4.0	19.9	+-	0.6;	3.0	15.8	+-	0.6;	3.9
22	187	4.7	17.7	+-	0.5;	2.7	13.8	+-	0.6;	3.7
23	201	8.7	20.1	+-	0.6;	3.0	16.0	+-	0.6;	3.9
24	190	7.8	16.4	+-	0.5;	2.5	12.6	+-	0.5;	3.6
25	325	6.7	18.6	+-	0.6;	2.8	14.6	+-	0.6;	3.8
26	314	11.0	17.6	+-	0.5;	2.6	13.7	+-	0.6;	3.7
27	314	11.0	18.1	+-	0.5;	2.7	14.2	+-	0.6;	3.7
28	315	10.0	21.4	+-	0.6;	3.2	17.1	+-	0.7;	4.0
29	186	12.0	20.6	+-	0.6;	3.1	16.5	+-	0.6;	4.0

Transit Dose = 2.5 +- 0.3; 3.1

CALVERT CLIFFS
For the period 930915-940203

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.75 - 11.25 N	No Data +- No Data	0
11.26 - 33.75 NNE	No Data +- No Data	0
33.76 - 56.25 NE	No Data +- No Data	0
56.26 - 78.75 ENE	No Data +- No Data	0
78.76 - 101.25 E	No Data +- No Data	0
101.26 - 123.75 ESE	No Data +- No Data	0
123.76 - 146.25 SE	15.9 +- 0.0	1
146.26 - 168.75 SSE	16.2 +- 1.0	2
168.76 - 191.25 S	15.8 +- 3.5	4
191.26 - 213.75 SSW	15.1 +- 1.3	3
213.76 - 236.25 SW	17.0 +- 1.9	2
236.26 - 258.75 WSW	16.2 +- 1.2	3
258.76 - 281.25 W	15.1 +- 1.6	2
281.26 - 303.75 WNW	16.6 +- 0.3	2
303.76 - 326.25 NW	15.2 +- 1.5	4
326.26 - 348.75 NNW	No Data +- No Data	0

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	16.2 +- 1.5	6
2 - 5	16.1 +- 1.9	11
> 5	14.9 +- 1.4	6
Upwind Control	15.0 +- 1.8	3

CALVERT CLIFFS
 TLD Direct Radiation Environmental Monitoring

NRC Station	Location	Azimuth / Distance	Description
		Degree / Mile	
1	275	1.5	ROUTE 2, KNOTTY PINE
3	284	1.7	ROUTE 2
4	323	2.4	LONG BEACH
5	297	3.1	ROUTE 2 AND PARRAN ROAD
6	324	4.7	ROUTE 2, CLIFFS MOTEL
7	324	5.5	GOVERNOR RUN
8	256	6.1	BROOMES ISLAND
9	273	4.1	ROUTE 265 (BOWEN ROAD)
10	253	3.7	WALLVILLE
11	230	4.0	ST. LEONARD CREEK
12	243	1.3	ROUTE 2
13	222	1.5	ROUTE 2 (JOHNS CREEK)
14	208	1.8	LUSBY
15	176	2.4	ROUTE 2, MIDDLEHAM CHAPEL
16	160	1.5	CAMP CANOY (BEFORE GEORGE'S GARAGE)
19	159	3.8	ROUTE 497 & LITTLE COVE POINT ROAD
20	139	4.7	COVE POINT
21	201	4.0	MILL BRIDGE ROAD & TURNER ROAD
22	187	4.7	APPEAL
23	201	8.7	S.PAXTUENT BEACH RD.
24	190	7.8	SOLOMONS ISLAND
25	325	6.7	SCIENTIST CLIFFS
26	314	11.0	PRINCE FREDERICK
27	314	11.0	PRINCE FREDERICK
28	315	10.0	PRINCE FREDERICK
29	186	12.0	LEXINGTON PARK

NRC TLD DOSES FOR CALVERT CLIFFS AREA

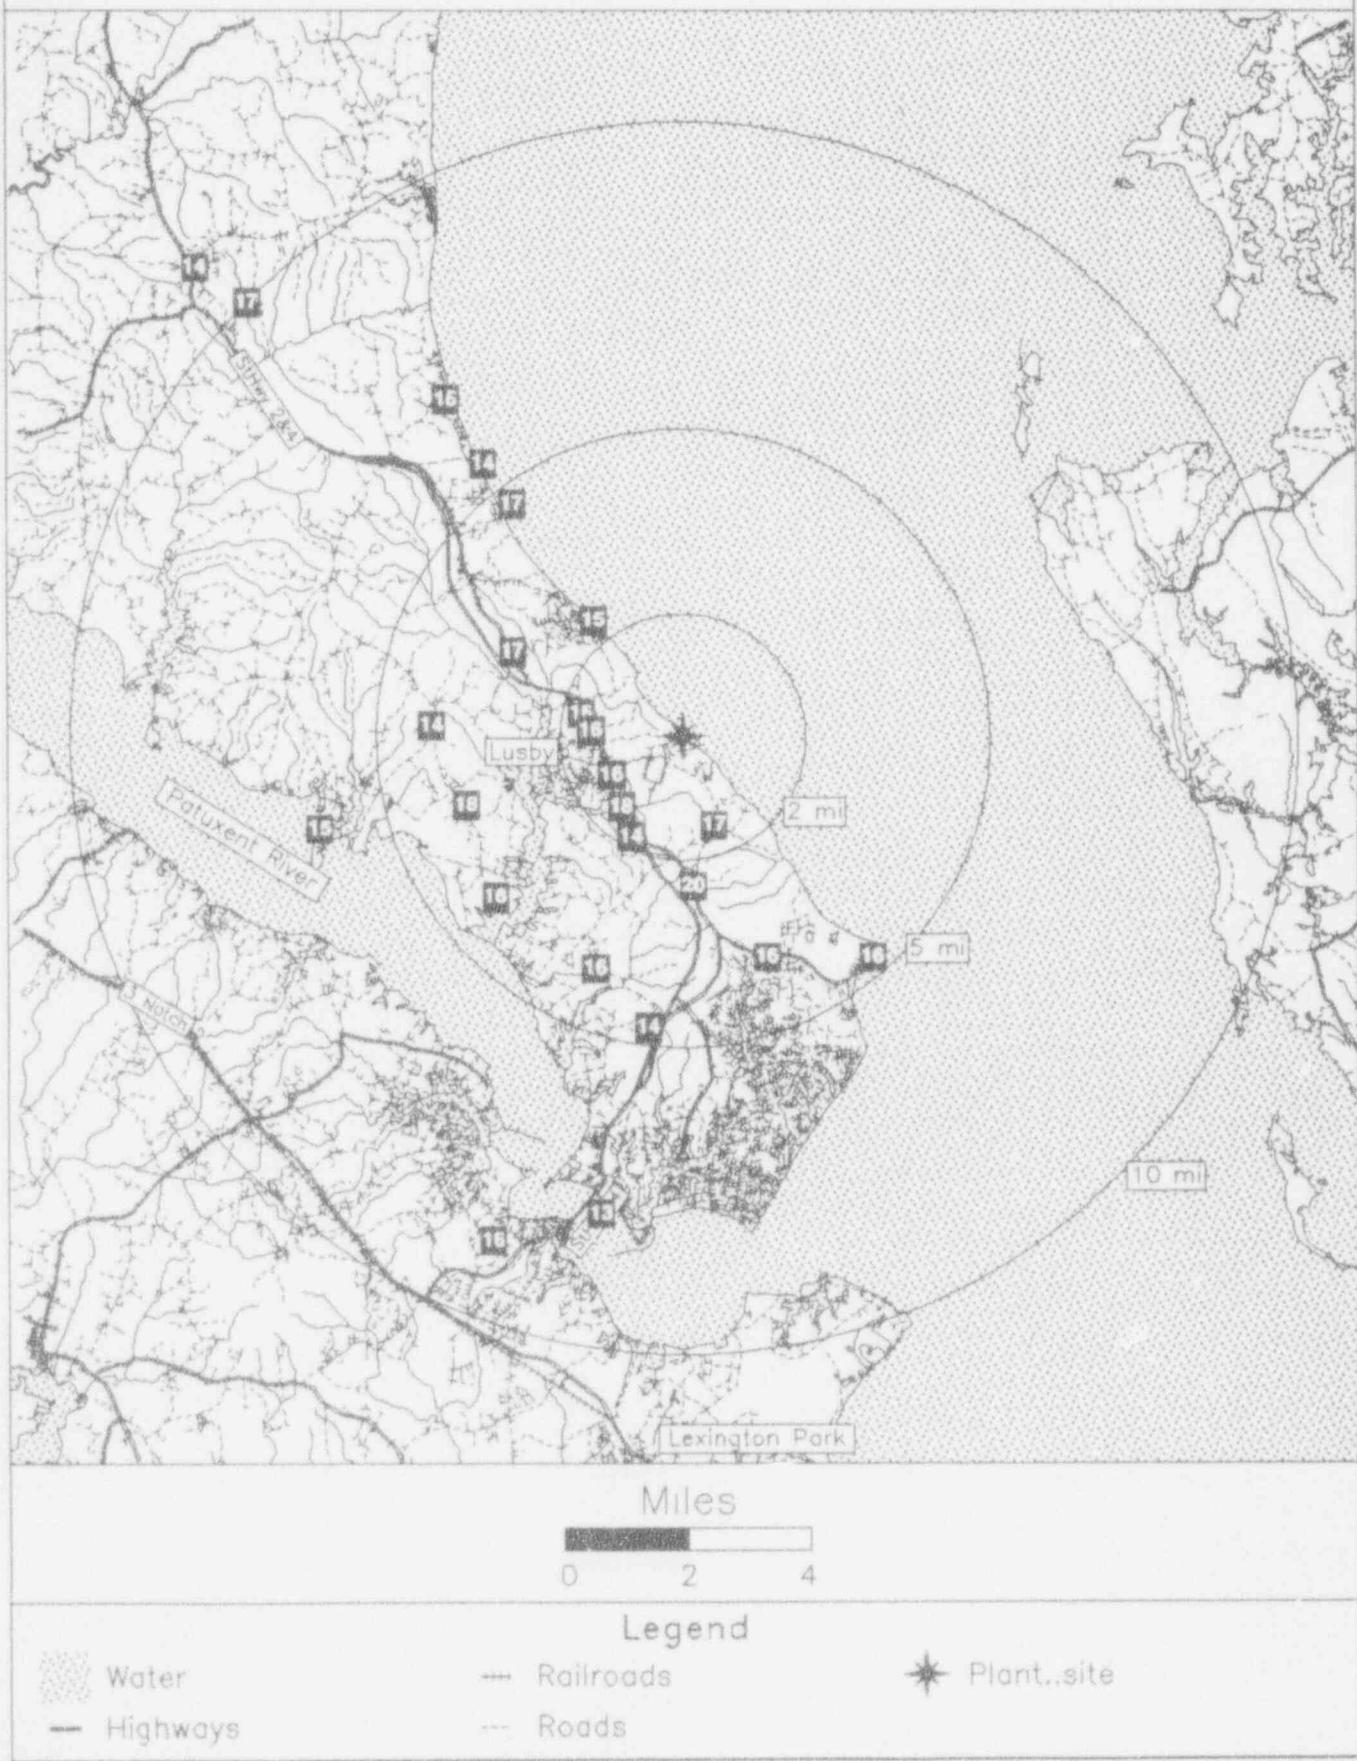

CATAWBA

TLD Direct Radiation Environmental Monitoring
 For the period 930915-940209 148 Days
 Field Time: 111 Days

NRC Sta	Location		Gross	Net Exposure Rate	Hist. Range
	Azimuth/Dist (Deg)/(Mi)		Exposure (mR) +-Rdm; Tot.	(mR/Sta. Qtr.) +-Rdm; Tot.	Net Exp Rate +-1 Std Dev
1	134	0.1	30.3 +- 0.9; 4.5	17.8 +- 0.9; 4.9	18.9 +- 3.1
2	162	0.4	25.4 +- 0.8; 3.8	13.9 +- 0.8; 4.4	15.8 +- 2.6
3	132	0.8	29.5 +- 0.9; 4.4	17.1 +- 0.8; 4.8	18.7 +- 2.8
4	111	1.3	27.2 +- 0.8; 4.1	15.3 +- 0.8; 4.6	16.0 +- 2.4
5	45	0.7	Missing Dosimeter	No Net Data	16.0 +- 2.2
6	298	1.3	29.6 +- 0.9; 4.4	17.2 +- 0.8; 4.8	17.6 +- 2.6
7	4	0.6	25.7 +- 0.8; 3.8	14.1 +- 0.8; 4.5	15.3 +- 2.6
8	332	1.5	29.5 +- 0.9; 4.4	17.2 +- 0.8; 4.8	19.7 +- 2.6
9	318	1.6	21.1 +- 0.6; 3.2	10.3 +- 0.7; 4.1	12.8 +- 2.8
10	176	1.8	27.2 +- 0.8; 4.1	15.3 +- 0.8; 4.6	16.9 +- 3.0
11	203	1.5	27.7 +- 0.8; 4.2	15.7 +- 0.8; 4.6	16.9 +- 2.7
12	225	1.5	27.7 +- 0.8; 4.2	15.7 +- 0.8; 4.6	17.3 +- 2.9
13	250	1.9	24.3 +- 0.7; 3.7	13.0 +- 0.7; 4.4	14.5 +- 3.0
14	270	1.4	21.0 +- 0.6; 3.2	10.3 +- 0.7; 4.1	12.8 +- 2.7
15	331	3.0	24.5 +- 0.7; 3.7	13.1 +- 0.7; 4.4	14.2 +- 3.0
16	311	3.9	22.0 +- 0.7; 3.3	11.1 +- 0.7; 4.2	13.4 +- 2.9
17	296	9.5	29.0 +- 0.9; 4.3	16.7 +- 0.8; 4.8	18.2 +- 2.7
18	324	4.8	24.2 +- 0.7; 3.6	12.9 +- 0.7; 4.3	15.5 +- 3.1
19	352	4.8	22.9 +- 0.7; 3.4	11.8 +- 0.7; 4.2	13.3 +- 2.8
20	22	4.0	27.5 +- 0.8; 4.1	15.5 +- 0.8; 4.6	16.8 +- 2.8
21	290	3.9	25.4 +- 0.8; 3.8	13.9 +- 0.8; 4.4	15.2 +- 2.6
22	266	4.0	26.5 +- 0.8; 4.0	14.7 +- 0.8; 4.5	16.2 +- 2.9
23	251	4.0	20.7 +- 0.6; 3.1	10.0 +- 0.7; 4.1	11.4 +- 2.8
24	229	3.9	22.7 +- 0.7; 3.4	11.6 +- 0.7; 4.2	12.3 +- 2.8
25	202	4.4	27.6 +- 0.8; 4.1	15.7 +- 0.8; 4.6	17.4 +- 2.2
26	51	4.3	30.0 +- 0.9; 4.5	17.6 +- 0.8; 4.9	18.2 +- 2.3
27	64	7.9	20.6 +- 0.6; 3.1	10.0 +- 0.7; 4.1	11.8 +- 2.4
28	61	4.9	26.3 +- 0.8; 3.9	14.6 +- 0.8; 4.5	15.3 +- 2.6
29	49	1.9	24.4 +- 0.7; 3.7	13.1 +- 0.7; 4.4	15.3 +- 3.6
30	64	1.8	25.2 +- 0.8; 3.8	13.7 +- 0.7; 4.4	15.0 +- 2.5
31	87	1.6	25.3 +- 0.8; 3.8	13.8 +- 0.7; 4.4	14.4 +- 2.6
32	121	2.6	27.7 +- 0.8; 4.2	15.7 +- 0.8; 4.6	15.5 +- 2.6
33	114	7.6	Missing Dosimeter	No Net Data	14.6 +- 3.2
34	93	4.5	27.1 +- 0.8; 4.1	15.2 +- 0.8; 4.6	17.2 +- 3.1
35	132	4.3	33.6 +- 1.0; 5.0	20.5 +- 0.9; 5.2	20.6 +- 2.6
36	163	8.9	22.2 +- 0.7; 3.3	11.2 +- 0.7; 4.2	12.5 +- 2.4
37	173	4.9	24.3 +- 0.7; 3.6	13.0 +- 0.7; 4.4	13.7 +- 2.2
38	157	4.6	32.0 +- 1.0; 4.8	19.2 +- 0.9; 5.0	18.3 +- 2.2
39	248	10.0	25.5 +- 0.8; 3.8	14.0 +- 0.8; 4.5	16.2 +- 3.6
40	229	12.0	27.7 +- 0.8; 4.1	15.7 +- 0.8; 4.6	15.1 +- 2.5
41	218	13.0	Missing Dosimeter	No Net Data	12.9 +- 3.4
42	213	16.0	27.3 +- 0.8; 4.1	15.4 +- 0.8; 4.6	15.6 +- 2.2

Transit Dose = 8.3 +- 0.5; 3.9

CATAWBA

For the period 930915-940209

TLD Direct Radiation Environmental Monitoring

Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	12.9 +- 1.6	2
11.26 - 33.75 NNE	15.5 +- 0.0	1
33.76 - 56.25 NE	15.3 +- 3.2	2
56.26 - 78.75 ENE	12.7 +- 2.4	3
78.76 - 101.25 E	14.5 +- 1.0	2
101.26 - 123.75 ESE	15.5 +- 0.3	2
123.76 - 146.25 SE	18.5 +- 1.8	3
146.26 - 168.75 SSE	14.8 +- 4.1	3
168.76 - 191.25 S	14.1 +- 1.6	2
191.26 - 213.75 SSW	15.7 +- 0.1	2
213.76 - 236.25 SW	13.7 +- 2.9	2
236.26 - 258.75 WSW	12.3 +- 2.1	3
258.76 - 281.25 W	12.5 +- 3.1	2
281.26 - 303.75 WNW	15.9 +- 1.8	3
303.76 - 326.25 NW	11.4 +- 1.3	3
326.26 - 348.75 NNW	15.1 +- 2.9	2


Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	14.6 +- 2.3	16
2 - 5	14.5 +- 2.8	17
> 5	13.0 +- 3.0	4
Upwind Control	15.5 +- 0.2	2

CATAWBA

TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	134	CATAWBA OVERLOOK CENTER
2	162	DISCHARGE CANAL
3	132	CONCORD RD.
4	111	ENT. COMMODORE YACHT CLUB
5	45	BLUEBIRD LN.
6	298	DUKE POWER SUBSTATION
7	4	DPC ENVIRON. MONITOR. STATION
8	332	HV POWER LINES
9	318	JCT HWY 274 & LIBERTY HILL RD.
10	176	S. OF MARTHA'S VINEYARD RD.
11	203	ALLISON CR. RD. (W. OF BARDALE RD.)
12	225	ALLISON CR. RD. (W. OF GRANVILLA RD)
13	250	ALLISON CR. PRESBYTERIAN CHURCH
14	270	ALLISON CREEK LANDING
15	331	BETHEL BAPTIST CHURCH
16	311	BETHEL SCHOOL
17	296	CLOVER POST OFFICE
18	324	CHANDLER RD OFF BETHEL SCH. RD
19	352	BETHEL LUMBER CO.
20	22	HUNGRY FISHERMAN RESTAURANT
21	290	INTERSEC. C.R. 114 & 152
22	266	INTERSEC. HWY 49 & C.R. 54
23	251	INTERSEC. HWYS 54 & 80
24	229	HV POWER LINE (HWY 54)
25	202	CARTER LUMBER CO.
26	51	HV POWER LINE(HWY 49 & PLEASANT HILL RD)
27	64	CAROWINDS AMUSEMENT PARK
28	61	INTERSEC. HAMILTON & STEELE CR. RDS
29	49	INTERSEC. SNUG HARBOR & KALABASH RDS
30	64	S. ON SNUG HARBOR RD
31	87	JUNC. BANKHEAD RD & WILBANKS RD
32	121	TEGA CAY(DPC SUBSTATION)
33	114	TEXACO C&S SUPERETTE (FT. MILL)
34	93	FT. MILL TELEPHONE CO.
35	132	SC WILDLIFE RESOURCES STATION
36	163	VILLAGE GAS PUMPS (C.R. 274)
37	173	BRYANT AIRPORT
38	157	JCT TWIN LAKES RD & HOMESTEAD RD
39	248	YORK COUNTY HEALTH CENTER
40	229	PHILADELPHIA UNITED CHURCH
41	218	JCT. HWY 321 & DAVES RD
42	213	FIRE DEPT & POST OFF. (MCCONNELLS, SC)

NRC TLD DOSES FOR CATAWBA AREA

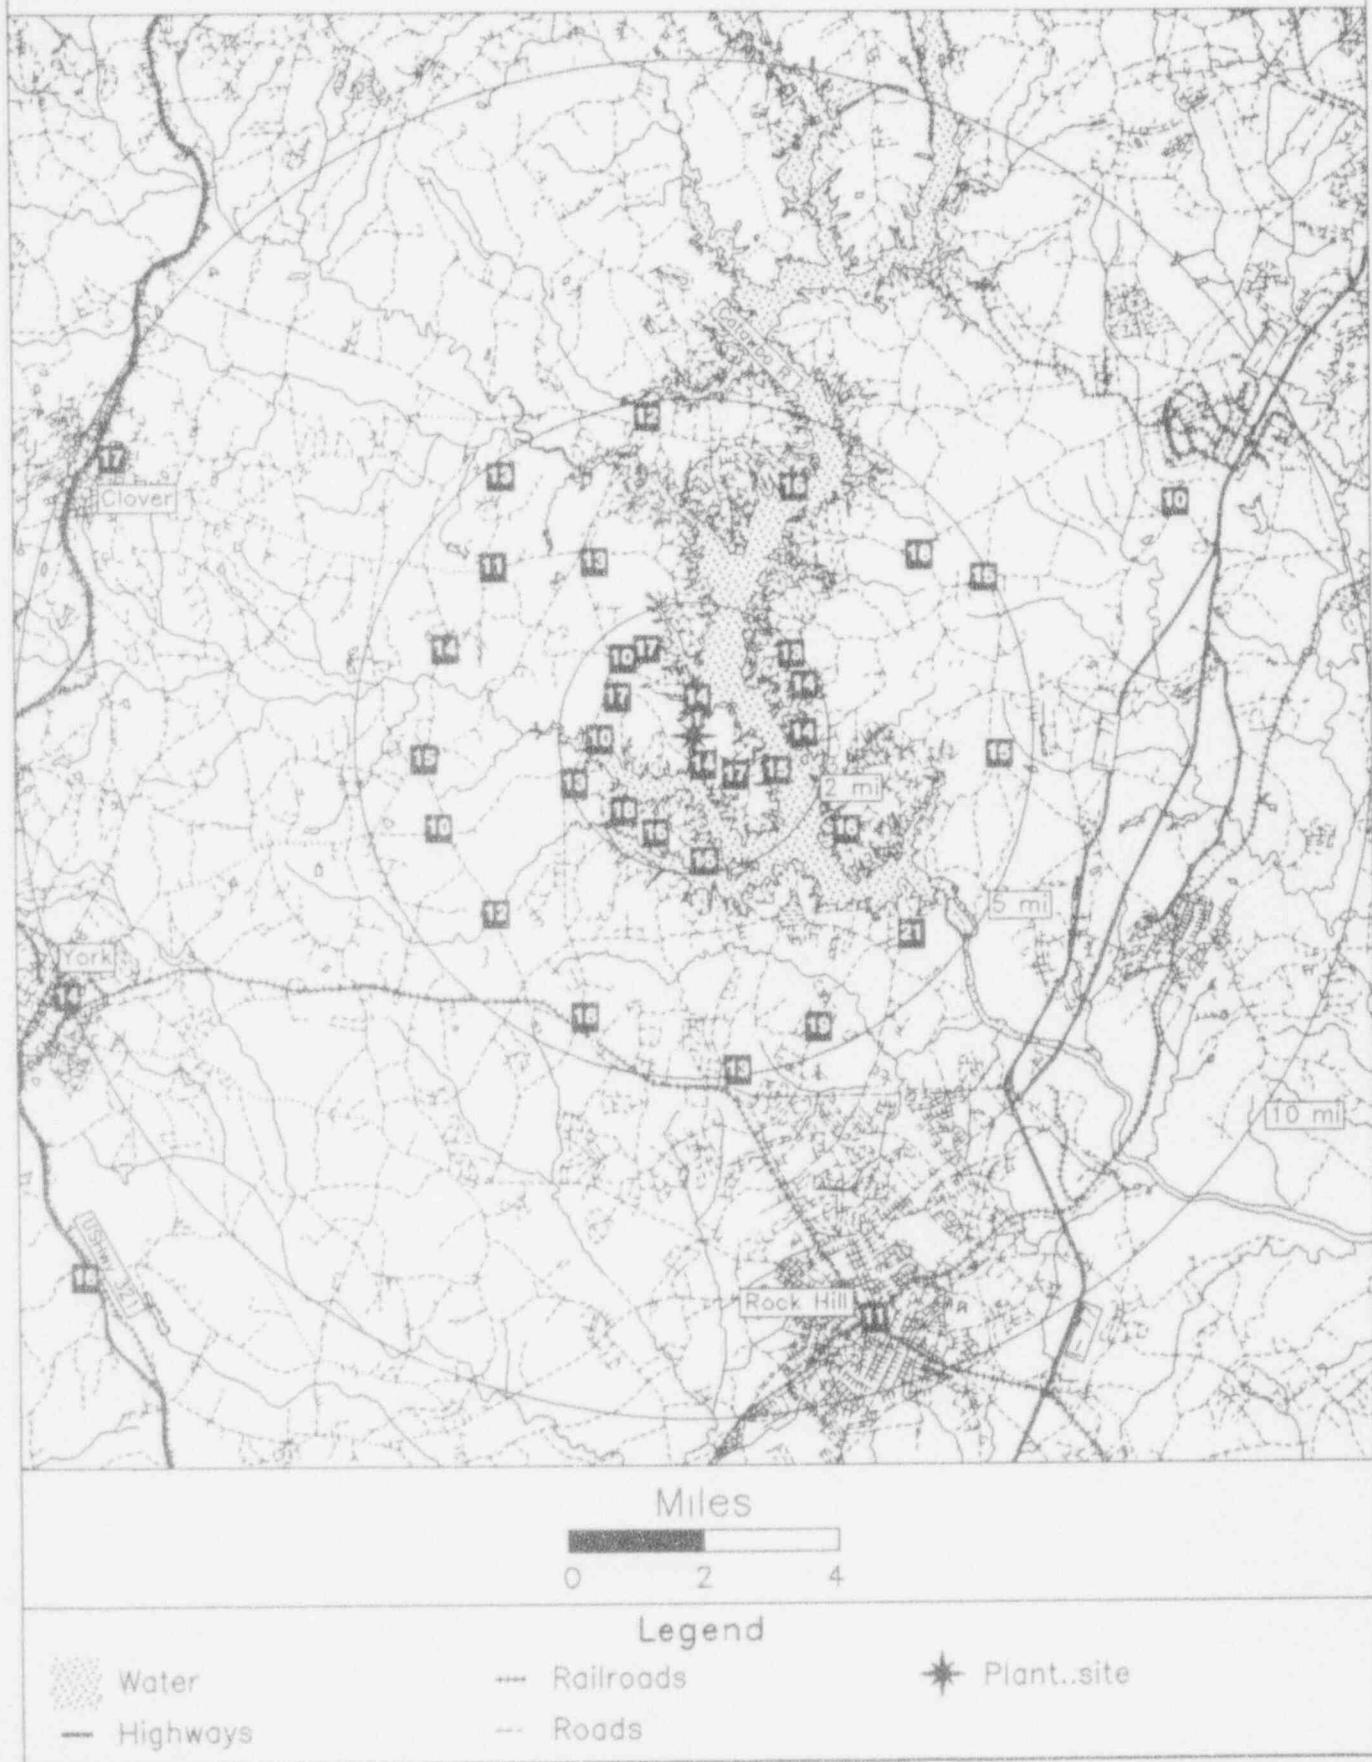

CLINTON

TLD Direct Radiation Environmental Monitoring
 For the period 930914-940203 143 Days
 Field Time: 108 Days

NRC Sta	Location	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	5	0.6	23.8 +- 0.7; 3.6	18.9 +- 2.5
2	40	0.7	25.7 +- 0.8; 3.9	18.6 +- 1.6
3	35	0.8	30.1 +- 0.9; 4.5	21.2 +- 1.9
4	163	0.5	25.7 +- 0.8; 3.9	19.3 +- 1.9
5	210	0.5	24.8 +- 0.7; 3.7	19.4 +- 1.9
6	223	0.6	26.0 +- 0.8; 3.9	19.5 +- 1.8
7	235	0.8	25.0 +- 0.7; 3.7	18.8 +- 1.6
8	62	1.9	24.0 +- 0.7; 3.6	18.4 +- 1.6
9	78	1.8	24.8 +- 0.7; 3.7	18.4 +- 1.5
10	79	2.6	25.4 +- 0.8; 3.8	18.7 +- 2.1
11	100	2.3	25.5 +- 0.8; 3.8	18.4 +- 1.5
12	115	3.0	25.8 +- 0.8; 3.9	16.4 +- 2.0
13	127	3.2	25.2 +- 0.8; 3.8	18.5 +- 1.6
14	155	2.1	24.8 +- 0.7; 3.7	18.9 +- 1.6
15	185	3.0	23.8 +- 0.7; 3.6	19.2 +- 2.1
16	203	3.2	22.8 +- 0.7; 3.4	18.0 +- 1.6
17	230	3.7	24.5 +- 0.7; 3.7	17.9 +- 1.8
18	255	2.8	25.1 +- 0.8; 3.8	19.1 +- 1.6
19	275	2.3	24.5 +- 0.7; 3.7	18.5 +- 1.6
20	302	0.9	24.9 +- 0.7; 3.7	18.0 +- 1.6
21	336	0.8	25.1 +- 0.8; 3.8	17.9 +- 1.8
22	0	0.6	24.4 +- 0.7; 3.7	18.6 +- 2.0
23	358	4.6	26.8 +- 0.8; 4.0	19.1 +- 1.8
24	20	3.9	23.9 +- 0.7; 3.6	18.3 +- 1.7
25	46	5.0	24.5 +- 0.7; 3.7	18.9 +- 1.5
26	62	5.5	22.8 +- 0.7; 3.4	17.0 +- 1.6
27	90	4.8	24.5 +- 0.7; 3.7	17.7 +- 1.8
28	115	5.2	22.4 +- 0.7; 3.4	17.3 +- 1.5
29	128	5.1	23.9 +- 0.7; 3.6	18.2 +- 1.6
30	153	5.8	25.8 +- 0.8; 3.9	18.5 +- 1.7
31	173	5.2	24.5 +- 0.7; 3.7	18.0 +- 1.5
32	205	4.7	22.9 +- 0.7; 3.4	18.1 +- 1.6
33	238	6.1	25.1 +- 0.8; 3.8	18.2 +- 1.7
34	252	5.8	22.6 +- 0.7; 3.4	17.8 +- 2.3
35	260	6.6	19.2 +- 0.6; 2.9	15.0 +- 1.8
36	272	4.8	23.3 +- 0.7; 3.5	18.5 +- 1.7
37	288	4.8	22.3 +- 0.7; 3.3	17.5 +- 1.7
38	297	7.6	22.9 +- 0.7; 3.4	16.2 +- 1.5
39	315	5.1	23.2 +- 0.7; 3.5	18.5 +- 2.0
40	342	4.8	25.3 +- 0.8; 3.8	18.2 +- 1.5
41	65	12.0	21.9 +- 0.7; 3.3	17.7 +- 2.1
42	148	12.0	23.2 +- 0.7; 3.5	18.5 +- 2.0
43	148	12.0	24.5 +- 0.7; 3.7	18.8 +- 1.6
44	206	14.0	20.9 +- 0.6; 3.1	15.8 +- 1.6

Transit Dose = 3.3 +- 0.4; 3.4

CLINTON
For the period 930914-940203

TLD Direct Radiation Environmental Monitoring

Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	18.0 +- 1.3	3
11.26 - 33.75 NNE	17.1 +- 0.0	1
33.76 - 56.25 NE	19.5 +- 2.4	3
56.26 - 78.75 ENE	16.7 +- 1.1	4
78.76 - 101.25 E	18.2 +- 0.4	3
101.26 - 123.75 ESE	17.3 +- 2.0	2
123.76 - 146.25 SE	17.7 +- 0.7	2
146.26 - 168.75 SSE	18.4 +- 0.5	3
168.76 - 191.25 S	17.3 +- 0.4	2
191.26 - 213.75 SSW	16.8 +- 0.9	3
213.76 - 236.25 SW	18.2 +- 0.6	3
236.26 - 258.75 WSW	17.4 +- 1.2	3
258.76 - 281.25 W	15.8 +- 2.3	3
281.26 - 303.75 WNW	16.7 +- 1.1	3
303.76 - 326.25 NW	16.5 +- 0.0	1
326.26 - 348.75 NNW	18.2 +- 0.1	2


Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	18.4 +- 1.4	12
2 - 5	17.6 +- 1.0	18
> 5	16.5 +- 1.5	11
Upwind Control	16.2 +- 1.5	3

CLINTON

TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	5	IL. 54
2	40	IL. POWER CO. RD.
3	35	I.P.C. RD.(NE) & IL. 54
4	163	I.P.C. FENCE
5	210	I.P.C. FENCE
6	223	I.P.C. FENCE
7	235	I.P.C. FENCE
8	62	IL. 54 & COUNTY 10
9	78	CTY. 10
10	79	DEWITT (T-INTER.) 1880E & 845N
11	100	MASCOUTIN ST. PK. OFF CTY 14
12	115	COUNTY 14
13	127	CTY. 14 & CTY. 5
14	155	CTY. 5 (CLINTON LK. MARINA SIGN)
15	185	IL. 10 (RESTRICTED AREA)
16	203	IL. 10
17	230	W. ACCESS RD. OFF IL-10 (POLE BY LINE)
18	255	W. ACCESS RD. OFF IL-10 ("T" INTER)
19	275	W. ACCESS RD. (NEAR IL. 54)
20	302	IL. 54 (R.R. XING)
21	336	IL. 54 (VISITOR CNTR.)
22	0	IL. 54 ON TRANSMISSION POLE
23	358	INTER. ~ 1.5 MI. E. OF CTY. 16 1300N/1650E
24	20	CTY. 10 & 1790E
25	46	CTY. 10 & 2000E
26	62	IL. 54 & IL. 48
27	90	IL. 48 ~ 2.7 MI. FROM IL 54
28	115	IL. 48 3RD INTER. AFTER #27
29	128	IL. 10(NEAR WELDON)
30	153	CTY. 14 & CTY. 15 300N/1900E
31	173	CTY. 15 & CTY. 5 300N/1700E
32	205	1400 E & 300N RDS.
33	238	CTY. 18 (1200E)
34	252	1100E/640N
35	260	CLINTON CENTER STREET (SUBST)
36	272	1150 E 0.8 MI PAST IL-54
37	288	950N/1200E
38	297	WAPELLA WATER TOWER OFF US-51
39	315	CTY 10 / 1300E
40	342	ON CTY. 16
41	65	FARMER CITY STATE BANK ON IL-54
42	148	ARGENTA MUNIC. BLDG. (NR.WTR.TWR) OFF CTY. 5
43	148	ARGENTA MUNIC. BLDG. (NR.WTR.TWR) OFF CTY. 5
44	206	EMERY (RR CROSSING) OFF IL-51

NRC TLD DOSES FOR CLINTON AREA

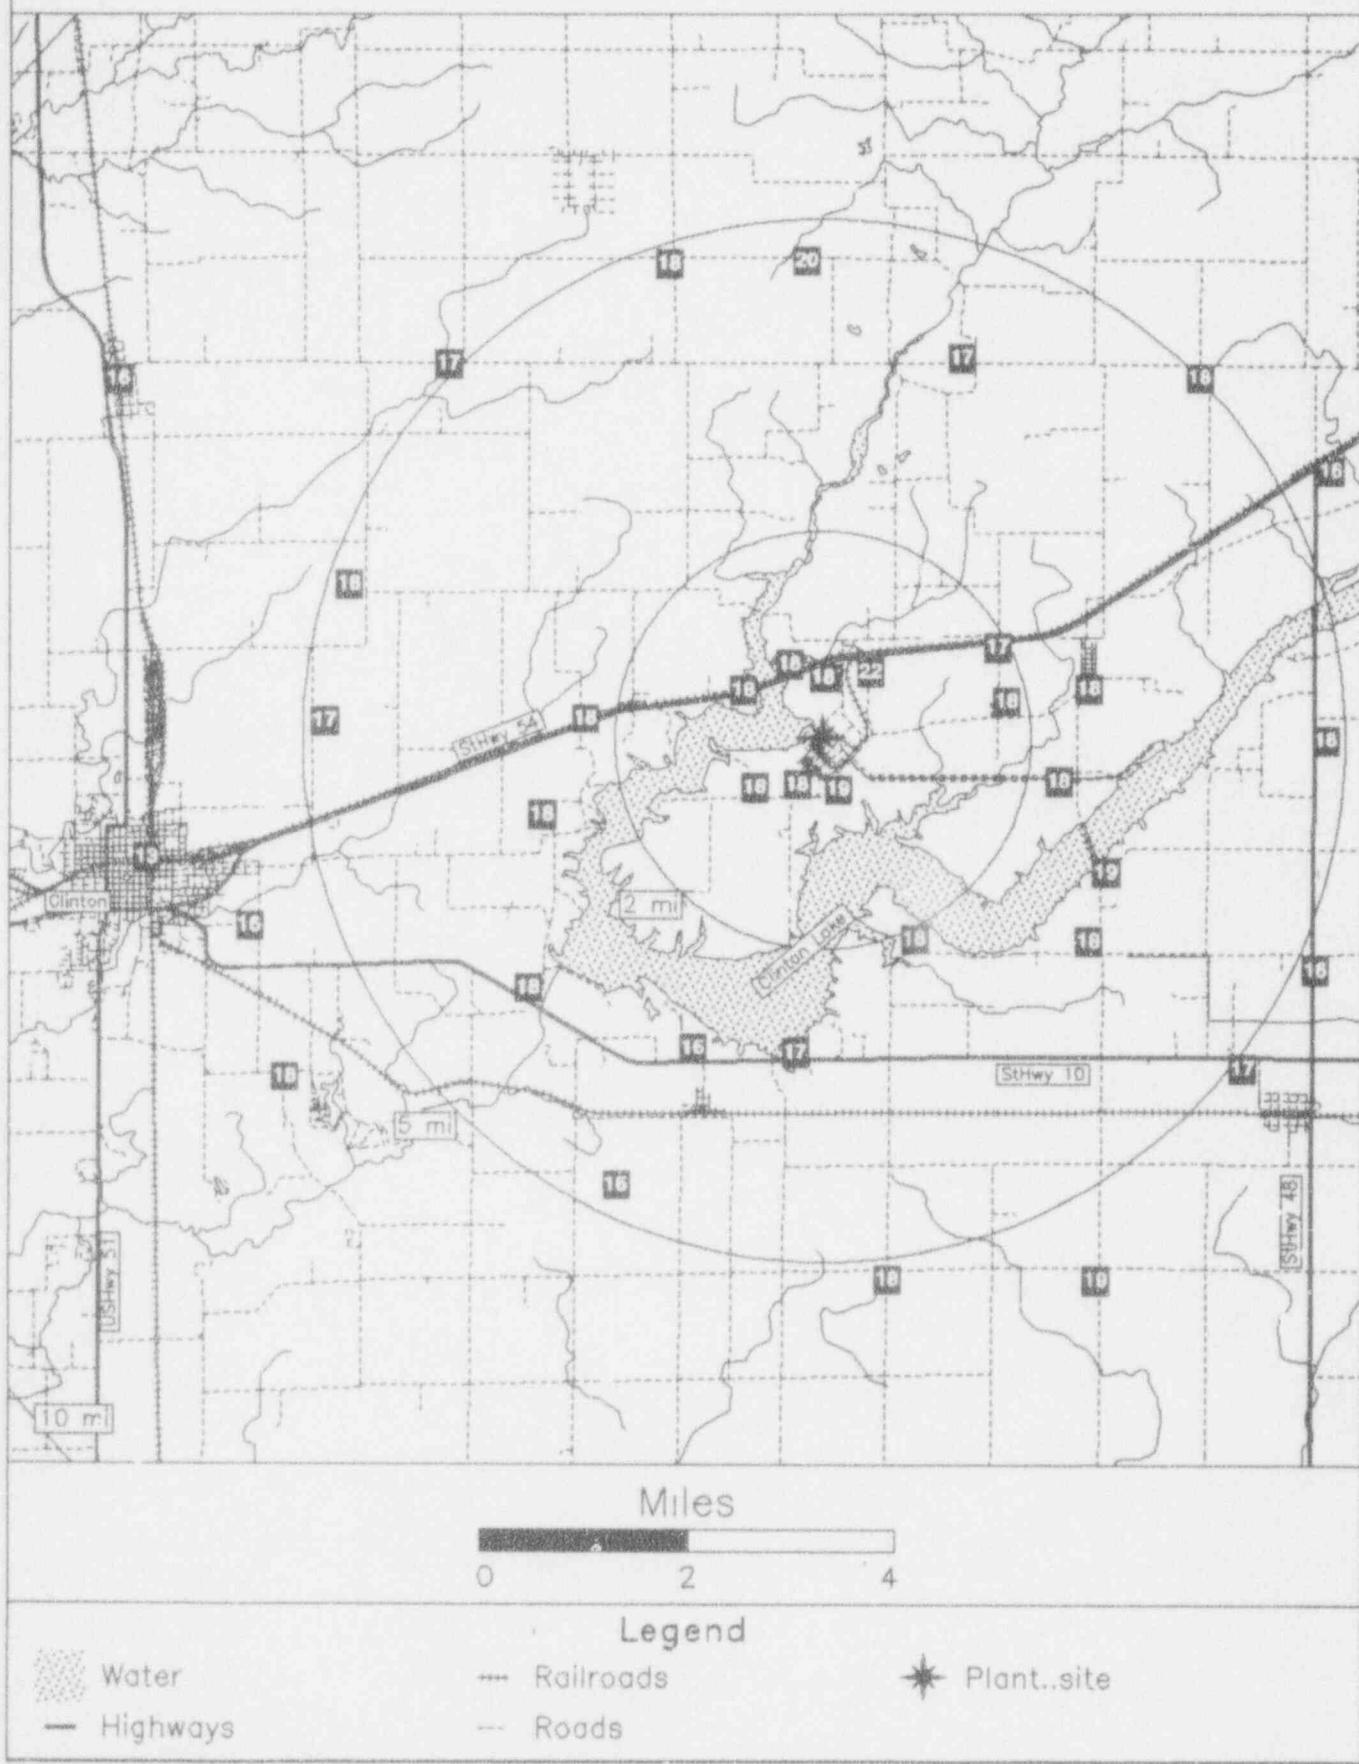

COMANCHE PEAK

TLD Direct Radiation Environmental Monitoring
 For the period 930913-940201 142 Days
 Field Time: 85 Days

NRC Sta	Location	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	306	1.4 20.4 +- 0.6; 3.1	15.1 +- 0.8; 4.5	15.2 +- 1.0
2	285	1.5 20.9 +- 0.6; 3.1	15.7 +- 0.8; 4.6	15.5 +- 1.3
3	268	1.1 18.5 +- 0.6; 2.8	13.1 +- 0.7; 4.3	14.3 +- 0.9
4	253	0.9 20.2 +- 0.6; 3.0	14.9 +- 0.8; 4.5	15.4 +- 1.2
5	218	1.0 20.1 +- 0.6; 3.0	14.8 +- 0.8; 4.5	15.7 +- 1.3
6	200	1.0 20.8 +- 0.6; 3.1	15.5 +- 0.8; 4.6	13.5 +- 1.1
7	180	1.4 19.6 +- 0.6; 2.9	14.3 +- 0.7; 4.4	13.8 +- 1.2
8	163	1.6 Damaged Dosimeter	No Net Data	15.7 +- 1.3
9	140	1.3 21.0 +- 0.6; 3.1	15.7 +- 0.8; 4.6	15.6 +- 0.9
10	118	1.5 20.8 +- 0.6; 3.1	15.5 +- 0.8; 4.6	13.6 +- 1.1
11	93	1.9 23.7 +- 0.7; 3.6	18.6 +- 0.9; 4.9	14.7 +- 2.8
12	73	2.4 22.3 +- 0.7; 3.3	17.1 +- 0.8; 4.8	17.2 +- 1.1
13	245	1.7 19.8 +- 0.6; 3.0	14.5 +- 0.8; 4.5	14.0 +- 1.0
14	156	4.3 20.5 +- 0.6; 3.1	15.2 +- 0.8; 4.5	13.9 +- 1.2
15	186	7.0 20.2 +- 0.6; 3.0	14.9 +- 0.8; 4.5	14.9 +- 1.5
16	183	4.1 20.0 +- 0.6; 3.0	14.7 +- 0.8; 4.5	16.0 +- 1.5
17	205	4.3 20.6 +- 0.6; 3.1	15.3 +- 0.8; 4.6	15.3 +- 0.9
18	225	3.4 18.4 +- 0.6; 2.8	13.0 +- 0.7; 4.3	12.9 +- 1.2
19	245	5.2 20.7 +- 0.6; 3.1	15.4 +- 0.8; 4.6	15.4 +- 0.8
20	264	5.8 19.8 +- 0.6; 3.0	14.5 +- 0.8; 4.5	13.7 +- 0.9
21	258	3.2 20.4 +- 0.6; 3.1	15.1 +- 0.8; 4.5	13.7 +- 1.1
22	284	5.1 19.0 +- 0.6; 2.8	13.6 +- 0.7; 4.4	13.4 +- 1.1
23	313	5.8 21.8 +- 0.7; 3.3	16.6 +- 0.8; 4.7	15.0 +- 1.0
24	332	4.9 19.2 +- 0.6; 2.9	13.8 +- 0.7; 4.4	14.2 +- 1.0
25	9	4.6 21.2 +- 0.6; 3.2	16.0 +- 0.8; 4.6	14.9 +- 1.3
26	26	4.5 21.0 +- 0.6; 3.2	15.8 +- 0.8; 4.6	14.5 +- 1.2
27	47	4.1 20.3 +- 0.6; 3.0	15.0 +- 0.8; 4.5	14.2 +- 1.1
28	6	1.8 21.0 +- 0.6; 3.2	15.8 +- 0.8; 4.6	14.8 +- 1.1
29	16	1.9 21.0 +- 0.6; 3.1	15.7 +- 0.8; 4.6	14.5 +- 1.2
30	102	3.0 21.6 +- 0.6; 3.2	16.4 +- 0.8; 4.7	15.5 +- 1.4
31	108	3.9 20.8 +- 0.6; 3.1	15.6 +- 0.8; 4.6	14.9 +- 1.4
32	135	4.6 21.4 +- 0.6; 3.2	16.2 +- 0.8; 4.7	15.6 +- 1.4
33	152	6.3 20.2 +- 0.6; 3.0	14.9 +- 0.8; 4.5	13.7 +- 1.1
34	47	2.9 19.0 +- 0.6; 2.9	13.6 +- 0.7; 4.4	13.4 +- 1.5
35	85	4.8 20.4 +- 0.6; 3.1	15.1 +- 0.8; 4.5	15.1 +- 1.5
36	115	7.5 20.4 +- 0.6; 3.1	15.1 +- 0.8; 4.5	15.0 +- 1.4
37	355	9.4 20.2 +- 0.6; 3.0	14.9 +- 0.8; 4.5	14.6 +- 2.7
38	337	9.2 21.0 +- 0.6; 3.1	15.7 +- 0.8; 4.6	14.3 +- 1.4
39	310	9.9 19.4 +- 0.6; 2.9	14.0 +- 0.7; 4.4	14.5 +- 1.5
40	302	8.1 19.7 +- 0.6; 3.0	14.4 +- 0.8; 4.5	13.8 +- 1.6
41	248	7.9 22.0 +- 0.7; 3.3	16.8 +- 0.8; 4.7	15.9 +- 1.3
42	90	0.5 20.3 +- 0.6; 3.1	15.0 +- 0.8; 4.5	13.9 +- 1.6
43	18	9.8 20.3 +- 0.6; 3.0	15.0 +- 0.8; 4.5	15.0 +- 1.5
44	263	1.7 19.3 +- 0.6; 2.9	13.9 +- 0.7; 4.4	13.2 +- 1.6
45	218	12.0 21.2 +- 0.6; 3.2	16.0 +- 0.8; 4.6	15.0 +- 1.4
46	140	12.0 20.5 +- 0.6; 3.1	15.2 +- 0.8; 4.5	14.7 +- 1.4
47	301	21.0 19.9 +- 0.6; 3.0	14.6 +- 0.8; 4.5	14.7 +- 1.4

Transit Dose = 6.1 +- 0.4; 3.0

COMANCHE PEAK
For the period 930913-940201

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	15.6 +- 0.6	3
11.26 - 33.75 NNE	15.5 +- 0.5	3
33.76 - 56.25 NE	14.3 +- 1.0	2
56.26 - 78.75 ENE	17.1 +- 0.0	1
78.76 - 101.25 E	16.3 +- 2.1	3
101.26 - 123.75 ESE	15.7 +- 0.6	4
123.76 - 146.25 SE	15.7 +- 0.5	3
146.26 - 168.75 SSE	15.1 +- 0.2	2
168.76 - 191.25 S	14.6 +- 0.3	3
191.26 - 213.75 SSW	15.4 +- 0.1	2
213.76 - 236.25 SW	14.6 +- 1.5	3
236.26 - 258.75 WSW	15.3 +- 0.9	5
258.76 - 281.25 W	13.8 +- 0.7	3
281.26 - 303.75 WNW	14.6 +- 0.9	4
303.76 - 326.25 NW	15.3 +- 1.3	3
326.26 - 348.75 NNW	14.8 +- 1.4	2

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	15.2 +- 1.2	15
2 - 5	15.2 +- 1.1	15
> 5	15.1 +- 0.9	16
Upwind Control	No Data +- No Data	0

COMANCHE PEAK
TLD Direct Radiation Environmental Monitoring

NRC Station	Location	Azimuth / Distance	Description
		Degree / Mile	
1	306	1.4	SITE OF TEXAS TLD#1
2	285	1.5	SITE OF TEXAS TLD#2
3	268	1.1	SITE OF TEXAS TLD#3
4	253	0.9	SITE OF TEXAS TLD#4
5	218	1.0	SITE OF TEXAS TLD#5
6	200	1.0	SITE OF TEXAS TLD#6
7	180	1.4	ST OF TEX#7
8	163	1.6	SITE OF TEXAS TLD#8
9	140	1.3	SITE OF TEXAS TLD#9
10	118	1.5	SITE OF TEXAS TLD#10
11	93	1.9	SITE OF TEXAS TLD#11
12	73	2.4	SITE OF TEXAS TLD#12
13	245	1.7	FM201-0.6 MI S. OF GATE
14	156	4.3	HWY 67 AT FOSSIL VILLAGE SHOPPING CTR.
15	186	7.0	HWY 67 AT CR 2008
16	183	4.1	HWY 67 AT 205
17	205	4.3	DINOSAUR ST. PARK
18	225	3.4	UTILITY POLE (ON CR1011 AT TOP OF HILL)
19	245	5.2	RUNNING M RANCH
20	264	5.8	SIREN POLE #19
21	258	3.2	SIREN POLE #7
22	284	5.1	SIREN POLE #18
23	313	5.8	HWY 206 & 51
24	332	4.9	HWY 212 (S&J OPERATING CO. GATE)
25	9	4.6	HWY 144 & 2425
26	26	4.5	RD 310A
27	47	4.1	HWY 310 & 2425
28	6	1.8	SITE OF TEXAS TLD#14
29	16	1.9	SITE OF TEXAS TLD#46
30	102	3.0	HAPPY HILLS CHILD. HOME
31	108	3.9	FM RD 200
32	135	4.6	HWY 67 AT 144
33	152	6.3	HWY 56-CABLE SIGN
34	47	2.9	HWY 144 & 213B
35	85	4.8	SITE OF TEXAS TLD#39
36	115	7.5	HWY 200 & 402
37	355	9.4	HOOD CTY.HOSP. (TEXAS TLD#79)
38	337	9.2	HWY 377 & 203
39	310	9.9	CITY OF TOLAR
40	302	8.1	HWY 56
41	248	7.9	CR 205 & HWY 51
42	90	0.5	ON SITE(COMMANCHE PK PLANT)
43	18	9.8	SITE OF TEXAS TLD#30
44	263	1.7	NEXT TO MAIN GATE
45	218	12.0	CHALK MT(JACKSONS TEXACO)
46	140	12.0	CITY OF BRAZOS PT.
47	301	21.0	CITY OF LIPAN

NRC TLD DOSES FOR COMANCHE PEAK AREA

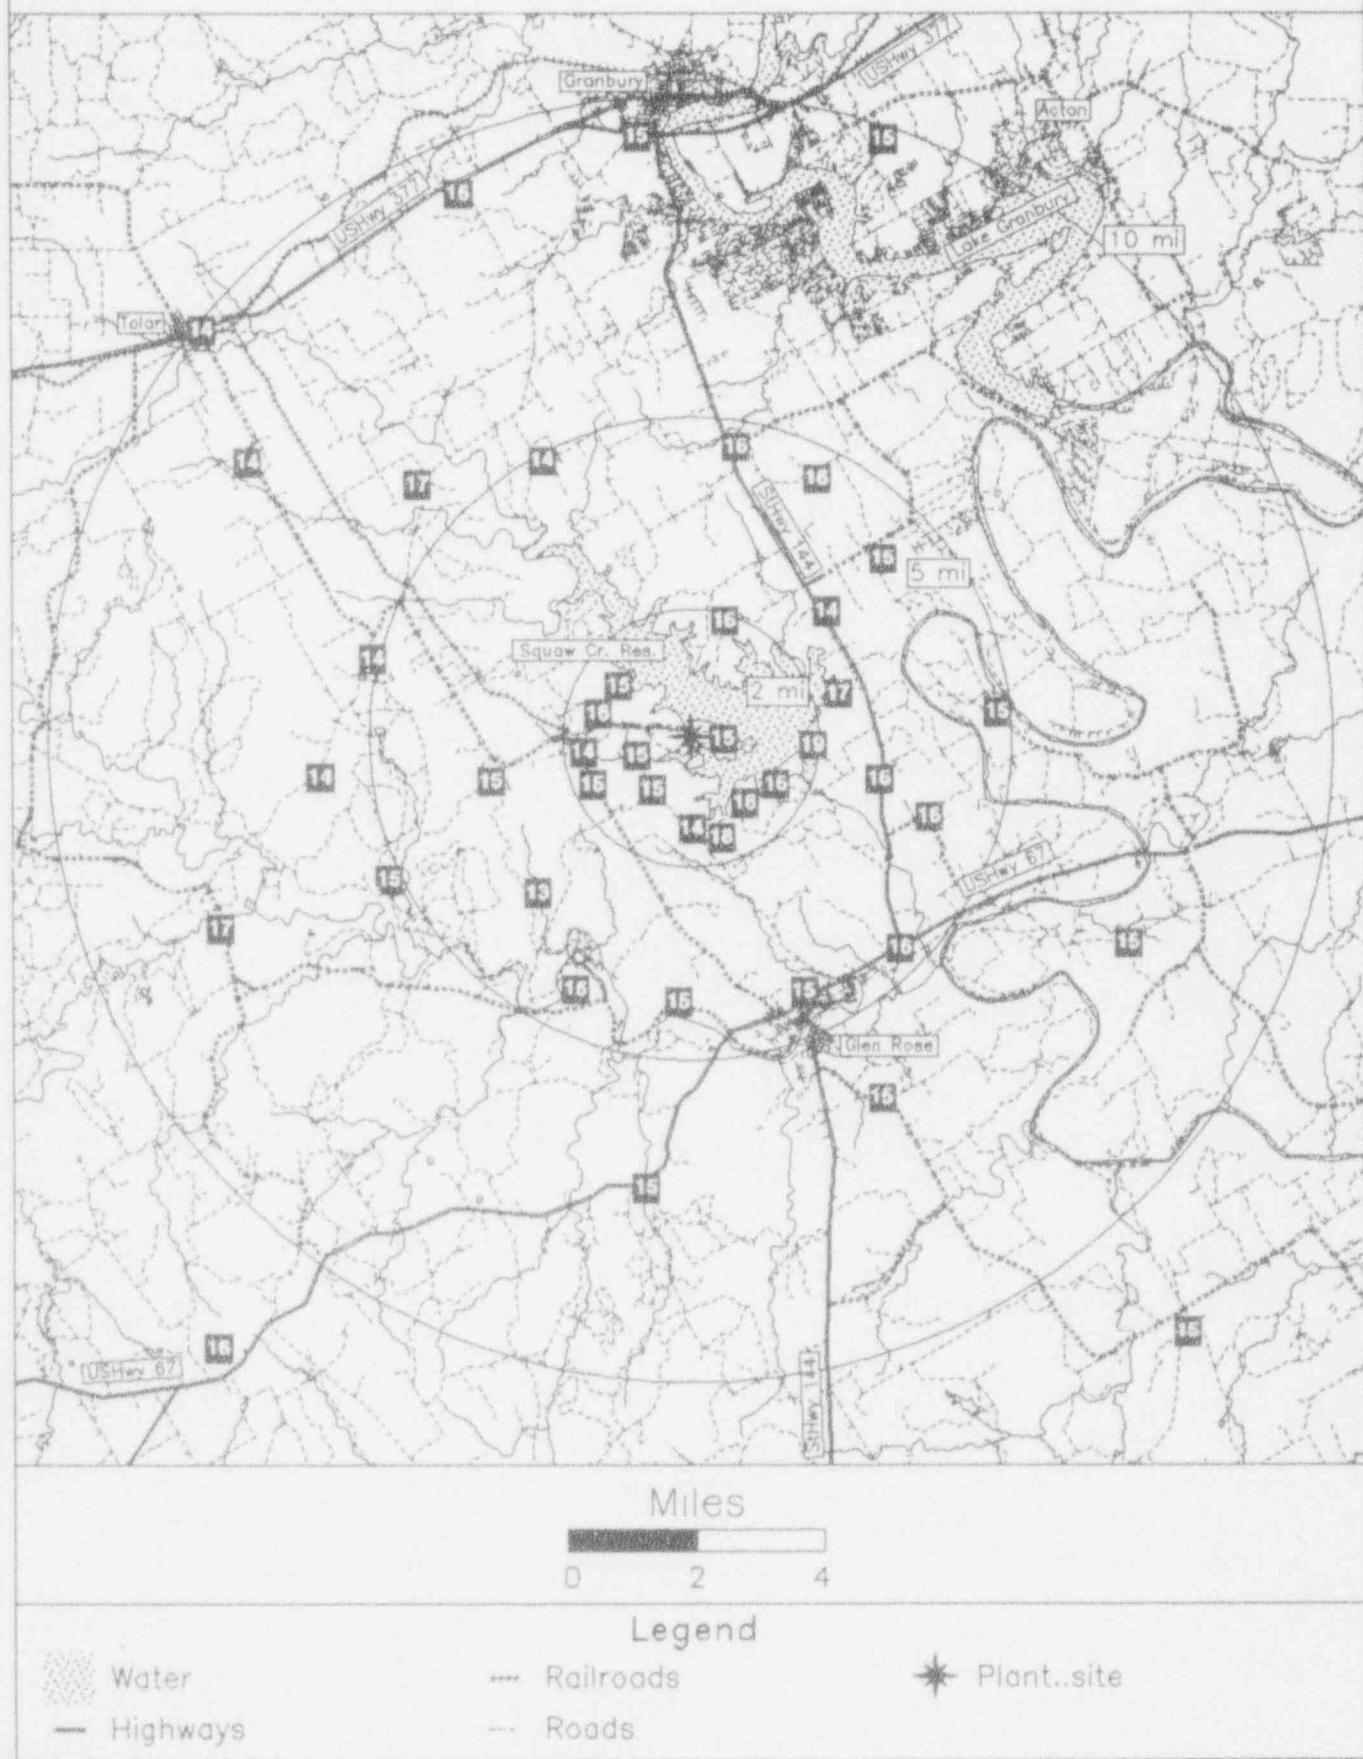

COOPER

TLD Direct Radiation Environmental Monitoring
 For the period 930913-940209 150 Days
 Field Time: 104 Days

NRC Sta	Location	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	350	2.4 27.4 +- 0.8; 4.1	18.7 +- 0.8; 4.7	19.2 +- 3.3
2	6	3.5 27.9 +- 0.8; 4.2	19.1 +- 0.8; 4.7	20.2 +- 3.4
3	18	2.7 27.6 +- 0.8; 4.1	18.9 +- 0.8; 4.7	20.8 +- 3.5
4	16	3.2 28.0 +- 0.8; 4.2	19.2 +- 0.8; 4.7	20.9 +- 3.4
5	47	1.9 28.5 +- 0.9; 4.3	19.6 +- 0.8; 4.8	20.7 +- 3.4
6	40	3.6 28.2 +- 0.8; 4.2	19.4 +- 0.8; 4.8	20.0 +- 3.5
7	75	2.7 27.4 +- 0.8; 4.1	18.7 +- 0.8; 4.7	19.9 +- 3.7
8	55	2.8 26.7 +- 0.8; 4.0	18.0 +- 0.8; 4.6	20.0 +- 3.6
9	80	2.1 28.8 +- 0.9; 4.3	19.9 +- 0.8; 4.8	21.4 +- 3.4
10	98	3.7 27.1 +- 0.8; 4.1	18.4 +- 0.8; 4.6	19.8 +- 3.4
11	118	2.3 29.1 +- 0.9; 4.4	20.1 +- 0.8; 4.8	21.3 +- 3.5
12	109	4.6 27.5 +- 0.8; 4.1	18.8 +- 0.8; 4.7	21.3 +- 3.3
13	141	3.2 28.4 +- 0.9; 4.3	19.6 +- 0.8; 4.8	20.8 +- 3.3
14	126	5.6 26.0 +- 0.8; 3.9	17.4 +- 0.8; 4.5	18.7 +- 2.7
15	159	2.7 27.4 +- 0.8; 4.1	18.6 +- 0.8; 4.7	19.9 +- 3.4
16	167	4.9 29.9 +- 0.9; 4.5	20.8 +- 0.9; 4.9	21.0 +- 3.6
17	205	0.3 28.5 +- 0.9; 4.3	19.6 +- 0.8; 4.8	20.3 +- 3.0
18	186	4.7 29.7 +- 0.9; 4.5	20.7 +- 0.9; 4.9	21.4 +- 3.5
19	213	3.0 27.9 +- 0.8; 4.2	19.1 +- 0.8; 4.7	20.3 +- 3.3
20	195	4.9 29.0 +- 0.9; 4.4	20.0 +- 0.8; 4.8	21.4 +- 3.3
21	222	2.0 26.9 +- 0.8; 4.0	18.2 +- 0.8; 4.6	19.1 +- 3.0
22	215	5.7 29.7 +- 0.9; 4.4	20.6 +- 0.9; 4.9	21.5 +- 3.6
23	256	1.5 28.9 +- 0.9; 4.3	19.9 +- 0.8; 4.8	21.0 +- 3.4
24	238	5.2 28.0 +- 0.8; 4.2	19.2 +- 0.8; 4.7	21.3 +- 3.8
25	276	2.2 29.4 +- 0.9; 4.4	20.4 +- 0.9; 4.9	21.7 +- 3.2
26	260	3.8 30.2 +- 0.9; 4.5	21.1 +- 0.9; 5.0	21.5 +- 3.0
27	301	1.8 28.8 +- 0.9; 4.3	19.9 +- 0.8; 4.8	21.2 +- 3.2
28	286	4.3 28.5 +- 0.9; 4.3	19.6 +- 0.8; 4.8	20.8 +- 3.5
29	324	2.8 27.8 +- 0.8; 4.2	19.0 +- 0.8; 4.7	20.4 +- 3.8
30	333	3.7 28.5 +- 0.9; 4.3	19.6 +- 0.8; 4.8	21.0 +- 3.5
31	343	2.6 28.7 +- 0.9; 4.3	19.8 +- 0.8; 4.8	21.0 +- 3.0
32	333	3.7 29.1 +- 0.9; 4.4	20.1 +- 0.8; 4.8	20.7 +- 3.4
33	215	1.0 29.8 +- 0.9; 4.5	20.7 +- 0.9; 4.9	21.2 +- 3.7
34	175	18.0 30.0 +- 0.9; 4.5	20.9 +- 0.9; 4.9	21.7 +- 3.7
35	333	23.0 27.9 +- 0.8; 4.2	19.1 +- 0.8; 4.7	19.8 +- 3.4
36	210	19.0 29.2 +- 0.9; 4.4	20.2 +- 0.8; 4.9	20.8 +- 3.5
37	64	7.0 33.5 +- 1.0; 5.0	23.9 +- 0.9; 5.3	24.2 +- 4.4
38	329	9.0 32.1 +- 1.0; 4.8	22.7 +- 0.9; 5.2	22.9 +- 3.4
39	273	10.0 28.5 +- 0.9; 4.3	19.6 +- 0.8; 4.8	20.2 +- 3.8
40	300	2.5 32.0 +- 1.0; 4.8	22.6 +- 0.9; 5.1	23.3 +- 3.9
42	93	3.5 27.8 +- 0.8; 4.2	19.0 +- 0.8; 4.7	20.1 +- 3.4
43	270	2.2 29.3 +- 0.9; 4.4	20.3 +- 0.8; 4.9	21.0 +- 3.6

Transit Dose = 5.9 +- 0.4; 3.5

COOPER

For the period 930913-940209

TLD Direct Radiation Environmental Monitoring

Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	19.1 +- 0.0	1
11.26 - 33.75 NNE	19.0 +- 0.3	2
33.76 - 56.25 NE	19.0 +- 0.8	3
56.26 - 78.75 ENE	21.3 +- 3.7	2
78.76 - 101.25 E	19.1 +- 0.8	3
101.26 - 123.75 ESE	19.4 +- 0.9	2
123.76 - 146.25 SE	18.5 +- 1.5	2
146.26 - 168.75 SSE	19.7 +- 1.5	2
168.76 - 191.25 S	20.7 +- 0.0	1
191.26 - 213.75 SSW	19.6 +- 0.5	3
213.76 - 236.25 SW	19.8 +- 1.4	3
236.26 - 258.75 WSW	19.6 +- 0.5	2
258.76 - 281.25 W	20.4 +- 0.6	4
281.26 - 303.75 WNW	20.7 +- 1.7	3
303.76 - 326.25 NW	19.0 +- 0.0	1
326.26 - 348.75 NNW	20.6 +- 1.5	4


Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	19.7 +- 0.8	6
2 - 5	19.6 +- 1.0	27
> 5	20.6 +- 2.4	6
Upwind Control	20.1 +- 0.9	3

COOPER

TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	363	STATE RECREATION AREA
2	6	0.5 MILES N. OF US 136
3	18	0.6 MILES S. OF US 136
4	16	1.5 MILES W. OF HWY. U
5	47	0.9 MILES W. OF PHELPS CITY
6	40	PHELPS CITY
7	75	HWY. U (1.5 MILES S. OF US 136)
8	55	HWY. U (0.5 MILES S. OF US 136)
9	80	FARMHOUSE
10	98	LANGDON
11	118	LANGDON
12	109	GRAIN STG. BIN
13	141	BM 883
14	126	ROCK CREEK DITCH
15	159	PAST END OF HWY. U
16	167	HWY. 67 (2.3 MI. S OF L. NEMAHA R.)
17	205	SOUTH OF PLANT AT AIR SAMPLER
18	186	HWY. 67 (2.3 MI. S OF L. NEMAHA R.)
19	213	N. OF NEMAHA BRIDGE
20	195	HWY. 67 (2.3 MI. S OF L. NEMAHA R.)
21	222	NPPD AIR SAMPLER AT NEMAHA
22	215	HWY. 67 (2.3 MI. S OF L. NEMAHA R.)
23	256	HWY. 67 (N. OF RD. TO REACTOR)
24	238	HWY. 67 (0.2 MI. S OF L. NEMAHA R.)
25	276	HWY. 67 (2 MILES S. OF US 136)
26	260	HWY. 67 (3 MILES S. OF US 136)
27	301	HWY. 67 (1.3 MILES S. OF US 136)
28	286	US 136 (2.6 MI. W OF SOUTHBOUND 67)
29	324	HWY. 67 & US 136
30	333	HWY. 67 (1 MILE N. OF US 136)
31	343	BROWNVILLE
32	333	US 136 (0.6 MI. W OF SOUTHBOUND 67)
33	215	MOORE RESIDENCE
34	175	FALLS CITY
35	333	NEBRASKA CITY
36	210	US 73 & US 75
37	64	ROCK PORT
38	329	PERU
39	273	AUBURN
40	300	HAPPY HOLLOW SCHOOL
42	93	HWY. U & E (LANGDON)
43	270	LANGDON HWY U& E

NRC TLD DOSES FOR COOPER AREA

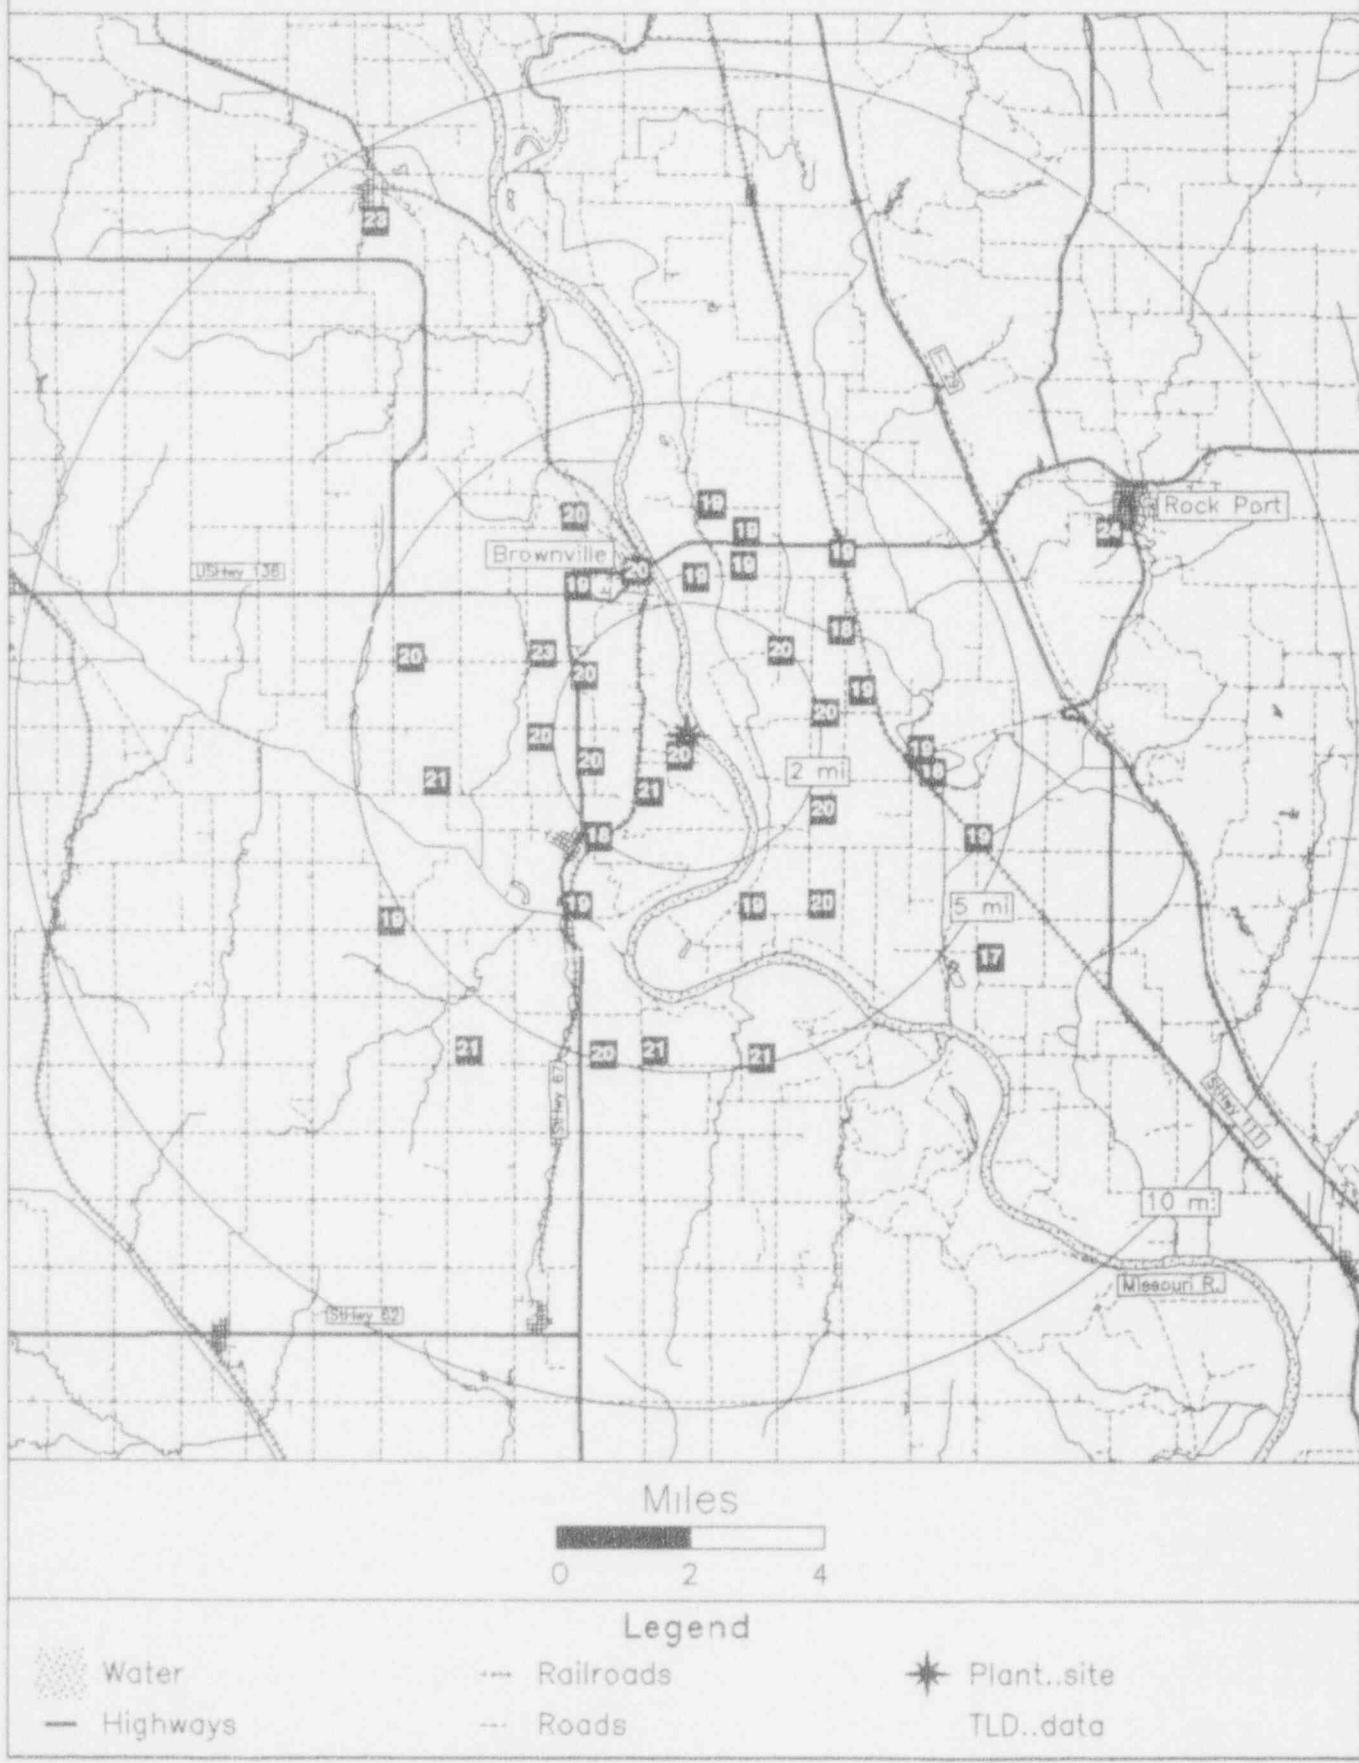

CRYSTAL RIVER

TLD Direct Radiation Environmental Monitoring
 For the period 930915-940203 142 Days
 Field Time: 100 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
6	61 4.2	16.7 +- 0.5; 2.5	12.0 +- 0.5; 3.6	12.9 +- 4.7
7	50 3.8	16.0 +- 0.5; 2.4	11.4 +- 0.5; 3.6	12.8 +- 4.6
8	20 5.2	17.4 +- 0.5; 2.6	12.7 +- 0.6; 3.7	13.5 +- 4.4
9	6 5.4	18.3 +- 0.5; 2.7	13.4 +- 0.6; 3.8	15.5 +- 5.1
10	348 5.0	18.6 +- 0.6; 2.8	13.8 +- 0.6; 3.8	14.7 +- 4.7
11	334 4.8	18.0 +- 0.5; 2.7	13.2 +- 0.6; 3.7	14.1 +- 4.7
12	318 4.8	18.1 +- 0.5; 2.7	13.2 +- 0.6; 3.8	13.7 +- 5.1
13	79 3.8	16.9 +- 0.5; 2.5	12.2 +- 0.6; 3.7	14.1 +- 4.9
14	95 4.1	17.2 +- 0.5; 2.6	12.4 +- 0.6; 3.7	13.7 +- 4.9
15	89 1.8	19.2 +- 0.6; 2.9	14.3 +- 0.6; 3.9	15.9 +- 4.9
16	113 5.0	16.7 +- 0.5; 2.5	12.0 +- 0.5; 3.6	13.2 +- 5.1
17	133 5.5	16.7 +- 0.5; 2.5	12.0 +- 0.5; 3.6	14.5 +- 5.2
18	74 8.1	15.9 +- 0.5; 2.4	11.3 +- 0.5; 3.6	13.1 +- 4.9
19	127 7.6	16.9 +- 0.5; 2.5	12.2 +- 0.6; 3.7	13.7 +- 4.8
20	150 12.0	16.3 +- 0.5; 2.5	11.7 +- 0.5; 3.6	12.7 +- 4.7
21	159 13.0	16.9 +- 0.5; 2.5	12.2 +- 0.6; 3.7	14.1 +- 5.0
22	150 13.0	18.0 +- 0.5; 2.7	13.2 +- 0.6; 3.7	13.5 +- 5.1
23	150 21.0	Missing Dosimeter	No Net Data	14.3 +- 5.3
24	150 21.0	15.9 +- 0.5; 2.4	11.3 +- 0.5; 3.6	12.7 +- 4.9
25	56 6.1	15.8 +- 0.5; 2.4	11.2 +- 0.5; 3.6	15.5 +- 5.4
26	357 5.2	18.6 +- 0.6; 2.8	13.7 +- 0.6; 3.8	14.5 +- 4.7
27	90 13.0	17.4 +- 0.5; 2.6	12.7 +- 0.6; 3.7	13.8 +- 5.0
28	140 4.8	17.9 +- 0.5; 2.7	13.1 +- 0.6; 3.7	14.3 +- 4.8

Transit Dose = 3.4 +- 0.3; 3.2

CRYSTAL RIVER
For the period 930915-940203

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	13.6 +- 0.2	2
11.26 - 33.75 NNE	12.7 +- 0.0	1
33.76 - 56.25 NE	11.3 +- 0.1	2
56.26 - 78.75 ENE	11.7 +- 0.5	2
78.76 - 101.25 E	12.9 +- 0.9	4
101.26 - 123.75 ESE	12.0 +- 0.0	1
123.76 - 146.25 SE	12.4 +- 0.6	3
146.26 - 168.75 SSE	12.0 +- 0.4	2
168.76 - 191.25 S	No Data +- No Data	0
191.26 - 213.75 SSW	No Data +- No Data	0
213.76 - 236.25 SW	No Data +- No Data	0
236.26 - 258.75 WSW	No Data +- No Data	0
258.76 - 281.25 W	No Data +- No Data	0
281.26 - 303.75 WNW	No Data +- No Data	0
303.76 - 326.25 NW	13.2 +- 0.0	1
326.26 - 348.75 NNW	13.5 +- 0.4	2

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	14.3 +- 0.0	1
2 - 5	12.6 +- 0.8	9
> 5	12.3 +- 0.8	10
Upwind Control	12.2 +- 1.3	2

CRYSTAL RIVER
TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
6	61	4.2
7	50	3.8
8	20	5.2
9	6	5.4
10	348	5.0
11	334	4.8
12	318	4.8
13	79	3.8
14	95	4.1
15	89	1.8
16	113	5.0
17	133	5.5
18	74	8.1
19	127	7.6
20	150	12.0
21	159	13.0
22	150	13.0
23	150	21.0
24	150	21.0
25	56	6.1
26	357	5.2
27	90	13.0
28	140	4.8
		BASSWOOD RD & CALADIUM ST.
		RT. 19
		RT. 40 & RT. 19
		CRACKERTOWN
		COAST GUARD STATION
		RT. 40
		PUMPKIN ISLAND
		RED LEVEL BAPTIST CHURCH
		TALLAHASSEE RD.
		PLANT ACCESS ROAD
		OAK LANE RD.
		STATE ARCHEOLOGICAL SITE
		DEROSA VILLAGE
		RT. 19 & RT. 495
		HOMOSASSA SPRINGS
		HOMOSASSA
		RT. 19
		RIGHT ROAD OFF RT. 19
		RIGHT ROAD OFF RT. 1
		CORP. OF ENGINEERS SP-LWAY & DAM
		RIVERSIDE RD. & 52ND ST.
		BEVERLY HILLS
		MARINE SCIENCE STATION

NRC TLD DOSES FOR CRYSTAL RIVER AREA

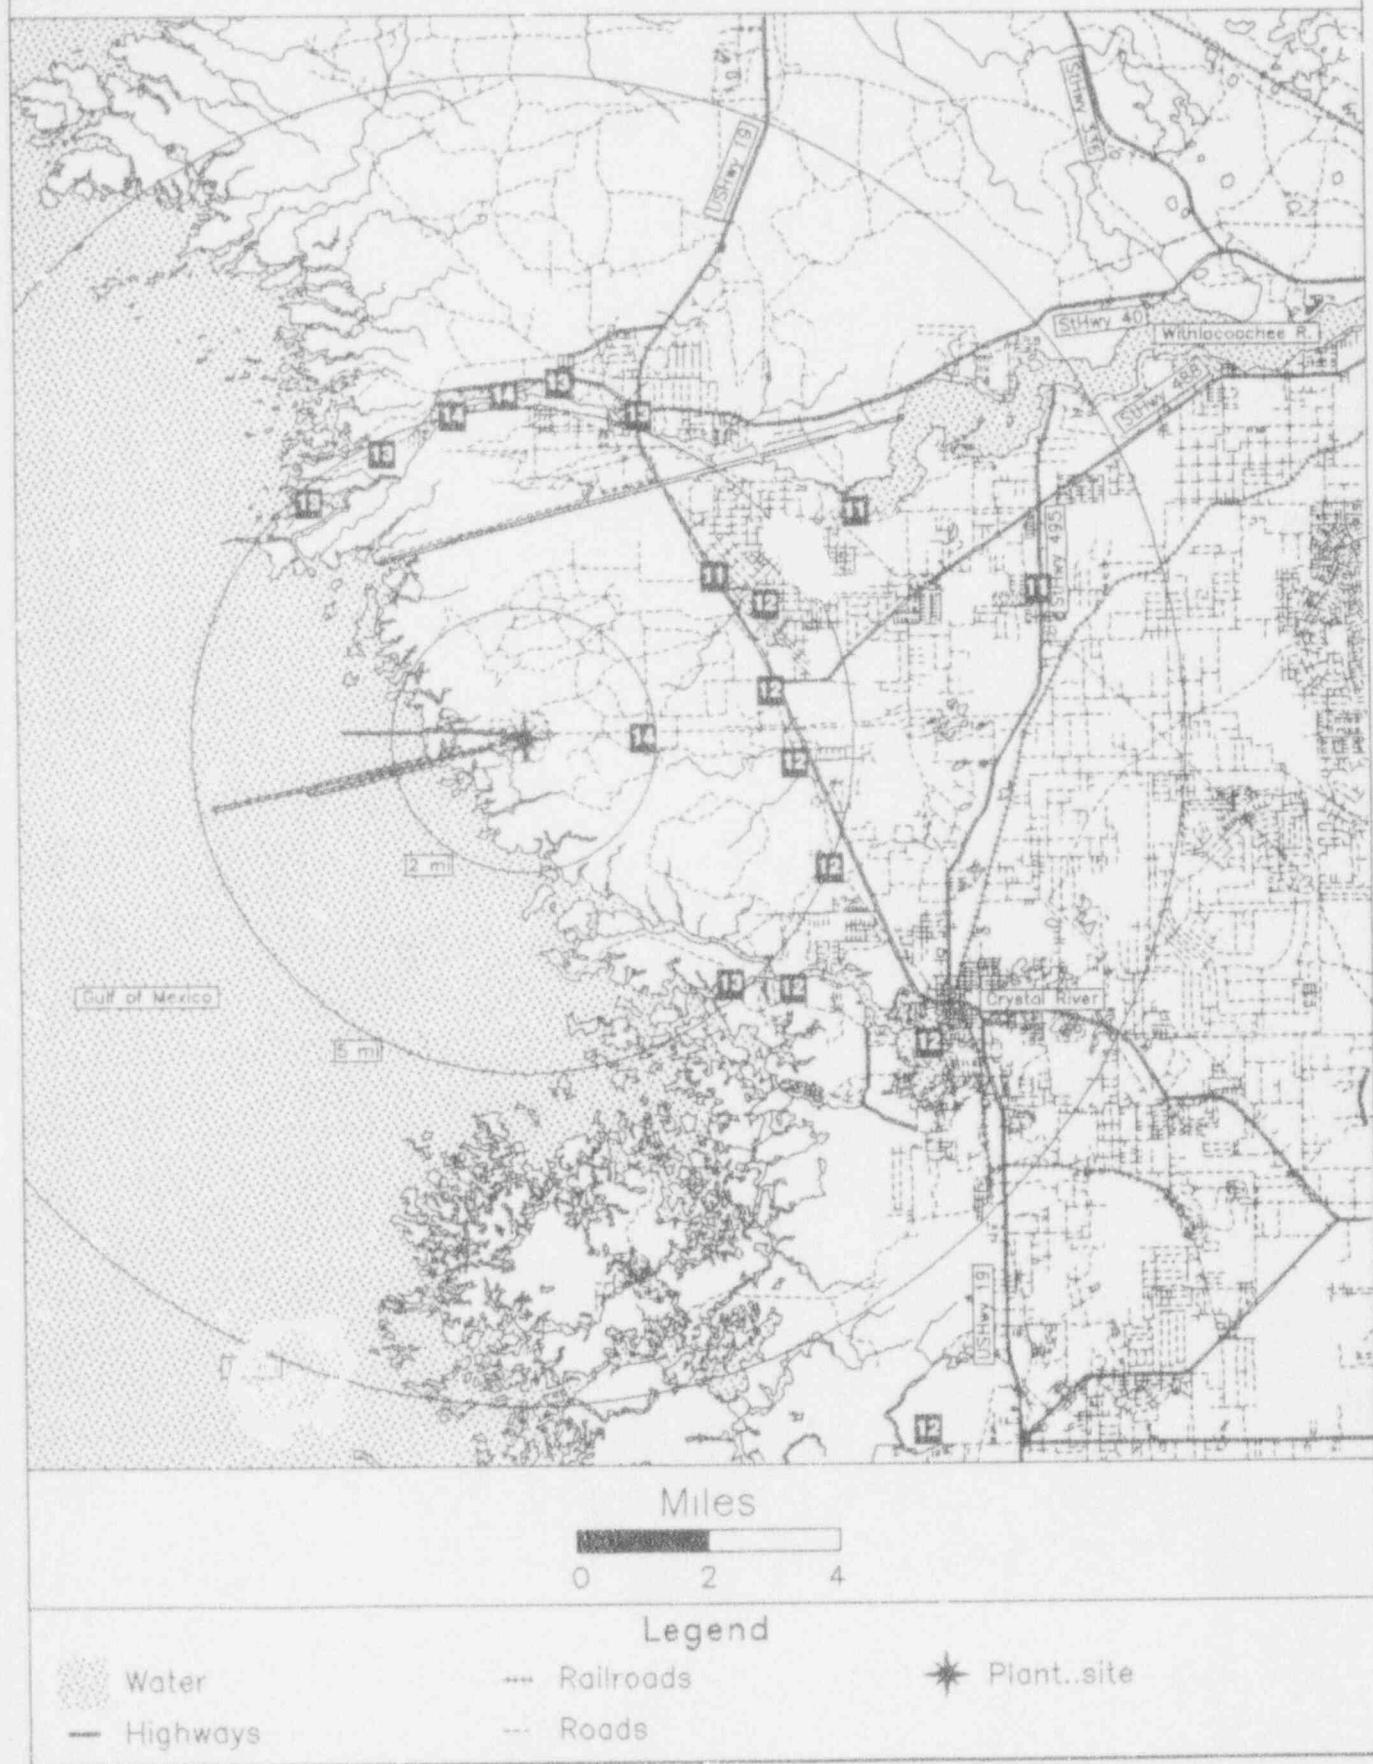

DAVIS BESSE

TLD Direct Radiation Environmental Monitoring

For the period 930914-940202 142 Days

Field Time: 107 Days

NRC Sta	Location		Gross	Net Exposure Rate	Hist. Range
	Azimuth/Dist (Deg)/(Mi)		Exposure (mR) +-Rdm; Tot.	(mR/Std. Qtr.) +-Rdm; Tot.	Net Exp Rate +-1 Std Dev
1	50	0.6	17.0 +- 0.5; 2.5	13.6 +- 0.5; 3.4	12.2 +- 1.5
2	86	0.9	18.0 +- 0.5; 2.7	14.5 +- 0.5; 3.5	13.5 +- 1.6
3	116	1.4	17.2 +- 0.5; 2.6	13.8 +- 0.5; 3.4	12.8 +- 1.6
4	172	0.8	18.1 +- 0.5; 2.7	14.6 +- 0.5; 3.5	16.0 +- 2.3
5	200	1.5	25.2 +- 0.8; 3.8	20.5 +- 0.7; 4.2	19.1 +- 2.2
6	226	1.0	20.0 +- 0.6; 3.0	16.2 +- 0.6; 3.7	16.2 +- 1.7
7	249	1.5	21.4 +- 0.6; 3.2	17.4 +- 0.6; 3.8	16.9 +- 1.8
8	267	1.8	20.6 +- 0.6; 3.1	16.7 +- 0.6; 3.7	17.3 +- 2.1
9	285	1.8	21.7 +- 0.7; 3.3	17.6 +- 0.6; 3.8	17.4 +- 2.0
10	306	1.5	17.9 +- 0.5; 2.7	14.4 +- 0.5; 3.5	15.0 +- 2.0
11	344	0.9	18.3 +- 0.5; 2.7	14.8 +- 0.5; 3.5	14.5 +- 1.6
12	142	4.5	23.8 +- 0.7; 3.6	19.4 +- 0.6; 4.0	17.9 +- 1.9
13	158	4.0	23.5 +- 0.7; 3.5	19.2 +- 0.6; 4.0	19.2 +- 2.2
14	180	3.8	21.1 +- 0.6; 3.2	17.2 +- 0.6; 3.8	16.0 +- 1.8
15	207	4.8	23.8 +- 0.7; 3.6	19.4 +- 0.6; 4.0	17.1 +- 2.2
16	225	4.5	22.2 +- 0.7; 3.3	18.1 +- 0.6; 3.9	17.2 +- 1.9
17	254	2.7	26.6 +- 0.8; 4.0	21.7 +- 0.7; 4.3	20.6 +- 2.2
18	269	3.0	22.1 +- 0.7; 3.3	17.9 +- 0.6; 3.9	17.7 +- 2.0
19	295	5.3	24.8 +- 0.7; 3.7	20.3 +- 0.7; 4.1	19.2 +- 2.0
20	25	0.5	17.0 +- 0.5; 2.6	13.7 +- 0.5; 3.4	12.4 +- 2.0
21	132	9.7	21.4 +- 0.6; 3.2	17.4 +- 0.6; 3.8	16.7 +- 1.7
22	210	6.5	21.0 +- 0.6; 3.1	17.0 +- 0.6; 3.8	17.7 +- 3.7

Transit Dose = 0.7 +- 0.3; 3.2

DAVIS BESSE
For the period 930914-940202

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	No Data +- No Data	0
11.26 - 33.75 NNE	13.7 +- 0.0	1
33.76 - 56.25 NE	13.6 +- 0.0	1
56.26 - 78.75 ENE	No Data +- No Data	0
78.76 - 101.25 E	14.5 +- 0.0	1
101.26 - 123.75 ESE	13.8 +- 0.0	1
123.76 - 146.25 SE	19.4 +- 0.0	1
146.26 - 168.75 SSE	19.2 +- 0.0	1
168.76 - 191.25 S	15.9 +- 1.8	2
191.26 - 213.75 SSW	20.0 +- 0.8	2
213.76 - 236.25 SW	17.1 +- 1.3	2
236.26 - 258.75 WSW	19.6 +- 3.0	2
258.76 - 281.25 W	17.3 +- 0.9	2
281.26 - 303.75 WNW	19.0 +- 1.8	2
303.76 - 326.25 NW	14.4 +- 0.0	1
326.26 - 348.75 NNW	14.8 +- 0.0	1

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	15.7 +- 2.1	12
2 - 5	19.0 +- 1.5	7
> 5	20.3 +- 0.0	1
Upwind Control	17.2 +- 0.2	2

DAVIS BESSE
TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	50	SITE BOUNDARY NEAR INTAKE
2	86	SITE BOUNDARY
3	116	SITE BOUNDARY - FOUSSAINT R. STORM DRAIN
4	172	SITE BOUNDARY - LOCUST PT. & RIVER
5	200	ALONG LEVTZ
6	226	RT. 2 AT FENCE BOUNDARY
7	249	ZETZER RD.
8	267	HUMPHREY & DUFF WASHA
9	285	RT. 2 & HUMPHREY
10	306	LONG BEACH - HUMPHREY & HOLLYWOOD
11	344	SAND BEACH - RUSSELL RD.
12	142	ERIE INDUSTRIAL PARK
13	158	RYMERS RD. & RT. 15
14	180	RT. 15 & TOUSSAINT RD.
15	207	BEHLMAN RD. & BIER
16	225	GENZMAN RD. & RT. 190
17	254	EARL MOORE FARM - BOYLEN RD.
18	269	HWY. 19 UNDER TRANSMISSION LINES
19	295	MM-CC STATE PARK (ADMINISTRATION BUILDING)
20	25	RESIDENCE
21	132	4TH & MADISON
22	210	CHURCH & WALNUT

NRC TLD DOSES FOR DAVIS-BESSE AREA

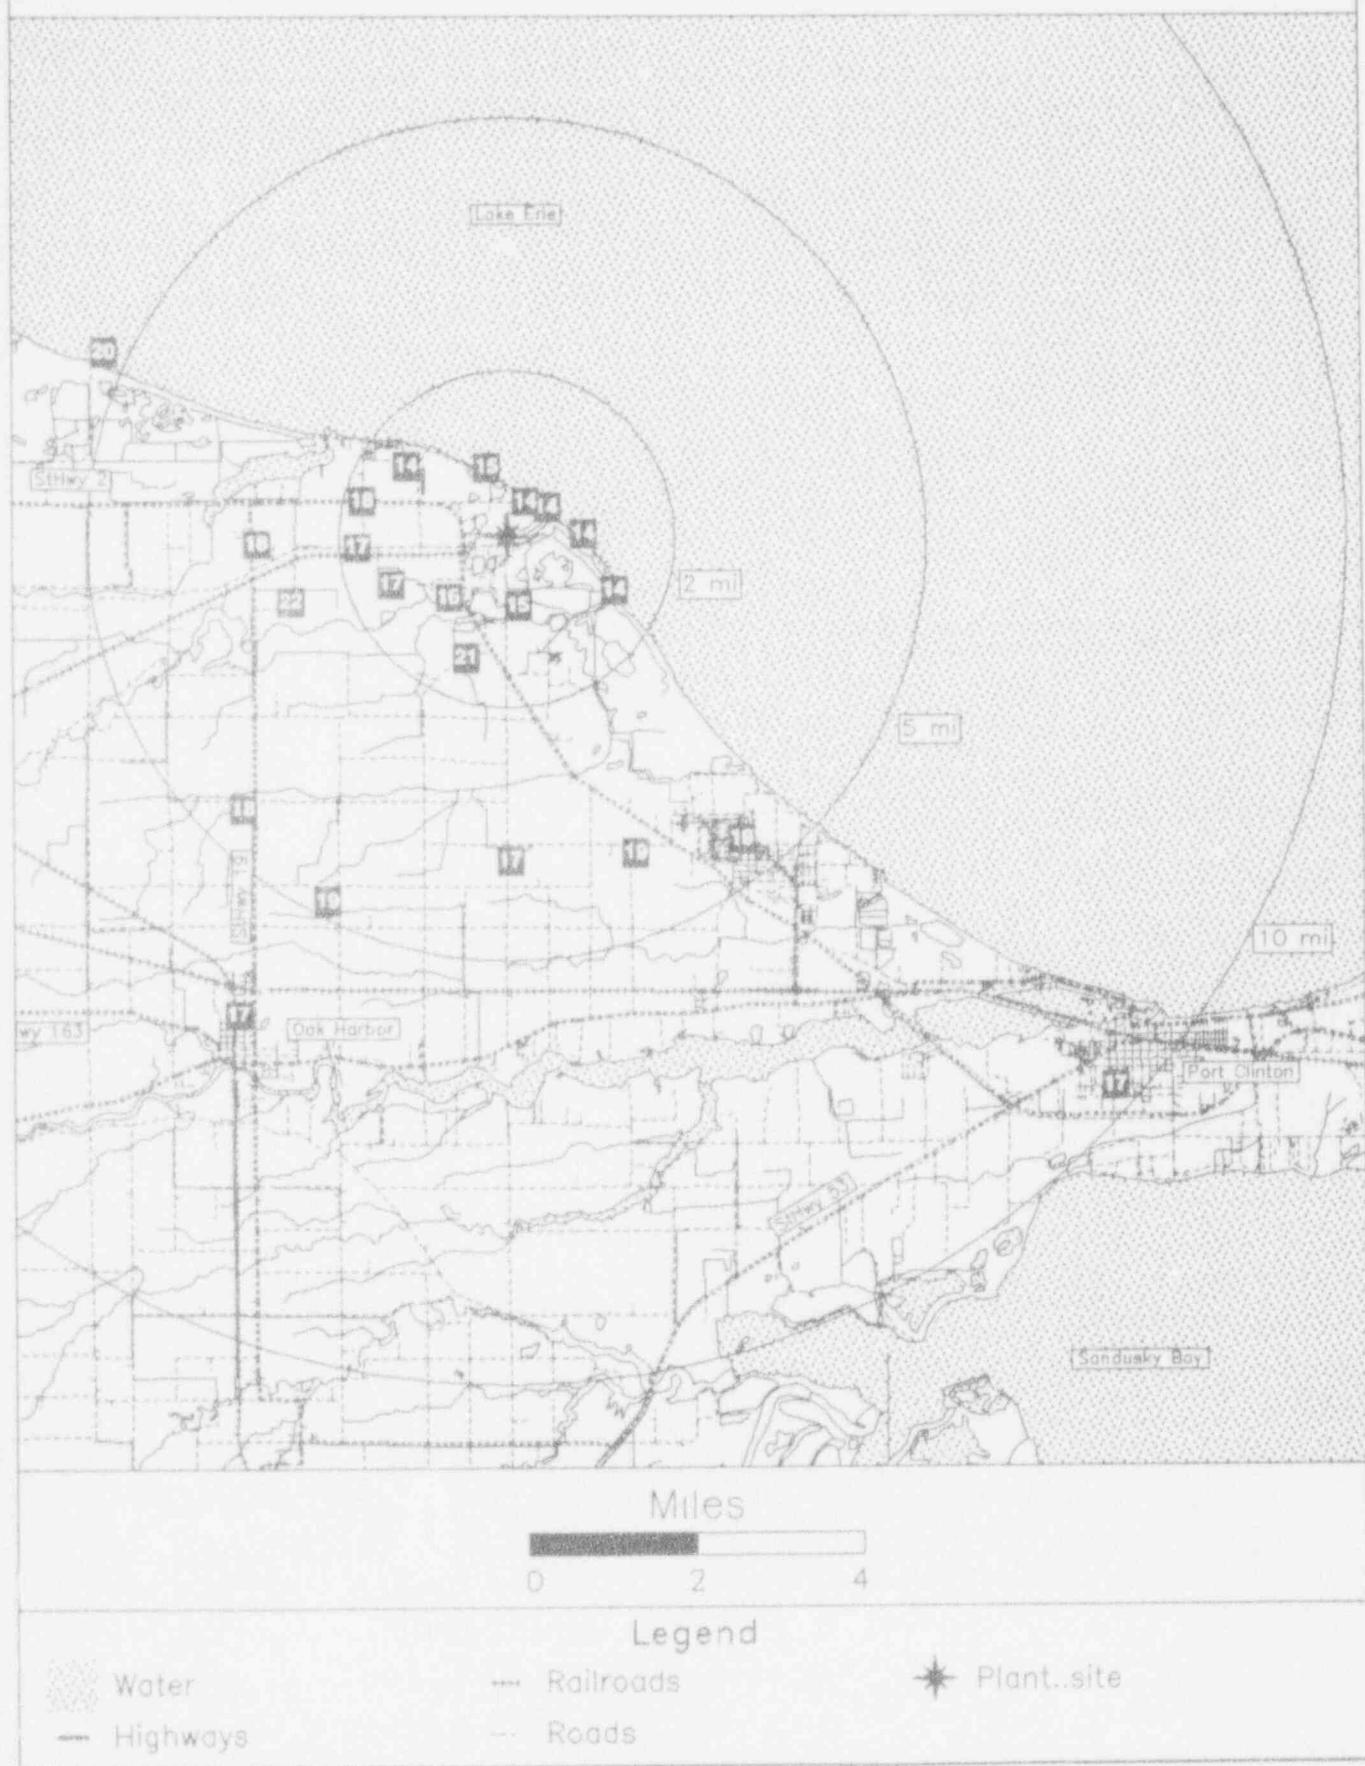

DC COOK

TLD Direct Radiation Environmental Monitoring
 For the period 930914-940201 141 Days
 Field Time: 92 Days

NRC Sta	Location (Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	54	1.7	19.0 +- 0.6; 2.9	13.5 +- 0.7; 4.1
2	67	1.3	22.9 +- 0.7; 3.4	17.3 +- 0.8; 4.5
3	89	1.1	17.6 +- 0.5; 2.6	12.2 +- 0.6; 4.0
4	58	0.7	17.0 +- 0.5; 2.6	11.6 +- 0.6; 3.9
5	19	2.3	18.0 +- 0.5; 2.7	12.6 +- 0.6; 4.0
6	111	1.6	18.3 +- 0.6; 2.8	12.9 +- 0.7; 4.1
7	135	1.5	17.9 +- 0.5; 2.7	12.4 +- 0.6; 4.0
8	158	1.4	22.6 +- 0.7; 3.4	17.0 +- 0.8; 4.5
9	171	1.9	19.0 +- 0.6; 2.8	13.5 +- 0.7; 4.1
10	199	1.5	18.3 +- 0.5; 2.7	12.8 +- 0.7; 4.1
11	195	3.9	18.0 +- 0.5; 2.7	12.6 +- 0.6; 4.0
12	200	6.6	Missing Dosimeter	No Net Data
13	179	3.9	22.3 +- 0.7; 3.3	16.7 +- 0.8; 4.5
14	151	4.4	22.2 +- 0.7; 3.3	16.6 +- 0.8; 4.4
15	130	4.6	24.1 +- 0.7; 3.6	18.5 +- 0.8; 4.7
16	110	3.7	19.3 +- 0.6; 2.9	13.8 +- 0.7; 4.1
17	88	3.6	Missing Dosimeter	No Net Data
18	67	3.8	19.7 +- 0.6; 3.0	14.2 +- 0.7; 4.2
19	24	3.8	17.0 +- 0.5; 2.6	11.6 +- 0.6; 3.9
20	43	3.3	Missing Dosimeter	No Net Data
21	26	9.9	22.6 +- 0.7; 3.4	17.1 +- 0.8; 4.5
22	121	18.0	20.8 +- 0.6; 3.1	15.3 +- 0.7; 4.3
23	121	18.0	19.6 +- 0.6; 2.9	14.1 +- 0.7; 4.2
24	121	18.0	Missing Dosimeter	No Net Data

Transit Dose = 5.2 +- 0.4; 3.1

DC COOK

For the period 930914-940201

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	No Data +- No Data	0
11.26 - 33.75 NNE	13.7 +- 2.9	3
33.76 - 56.25 NE	13.5 +- 0.0	1
56.26 - 78.75 ENE	14.3 +- 2.9	3
78.76 - 101.25 E	12.2 +- 0.0	1
101.26 - 123.75 ESE	13.3 +- 0.6	2
123.76 - 146.25 SE	15.5 +- 4.3	2
146.26 - 168.75 SSE	16.8 +- 0.3	2
168.76 - 191.25 S	15.1 +- 2.3	2
191.26 - 213.75 SSW	12.7 +- 0.2	2
213.76 - 236.25 SW	No Data +- No Data	0
236.26 - 258.75 WSW	No Data +- No Data	0
258.76 - 281.25 W	No Data +- No Data	0
281.26 - 303.75 WNW	No Data +- No Data	0
303.76 - 326.25 NW	No Data +- No Data	0
326.26 - 348.75 NNW	No Data +- No Data	0

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	13.7 +- 2.1	9
2 - 5	14.6 +- 2.5	8
> 5	17.1 +- 0.0	1
Upwind Control	14.7 +- 0.8	2

DC COOK
 TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	54	RED ARROW HWY. (US 31)
2	67	RED ARROW HWY. & LINCO RD.
3	89	RED ARROW HWY. & ROAD TO PLANT
4	58	WILLOW RD.
5	19	GRAND MERE RD.
6	111	JERICHO RD. & LIVINGSTON RD.
7	135	GAST RD.
8	158	LEMON CREEK RD. & RED ARROW HWY.
9	171	RED ARROW HWY.
10	199	DUNEWOOD DR.
11	195	HILDEBRANT RD.
12	200	SAWYER RD. & RED ARROW HWY.
13	179	SNOW RD. & BALDWIN RD.
14	151	SNOW RD. & DATE RD.
15	130	CLEVELAND AVE. & SKALA RD.
16	110	CLEVELAND AVE. & LEMON CREEK RD.
17	88	CLEVELAND AVE. & MARRS RD.
18	67	CLEVELAND AVE. & ROCKY WEED RD.
19	24	THORNTON RD & MARQUETTE WOODS RD.
20	43	JOHN BEEVS RD.
21	26	DOWNTOWN ST. JOSEPH (MI)
22	121	NILES (MI)
23	121	NILES (MI)
24	121	NILES (MI)

NRC TLD DOSES FOR D.C. COOK AREA

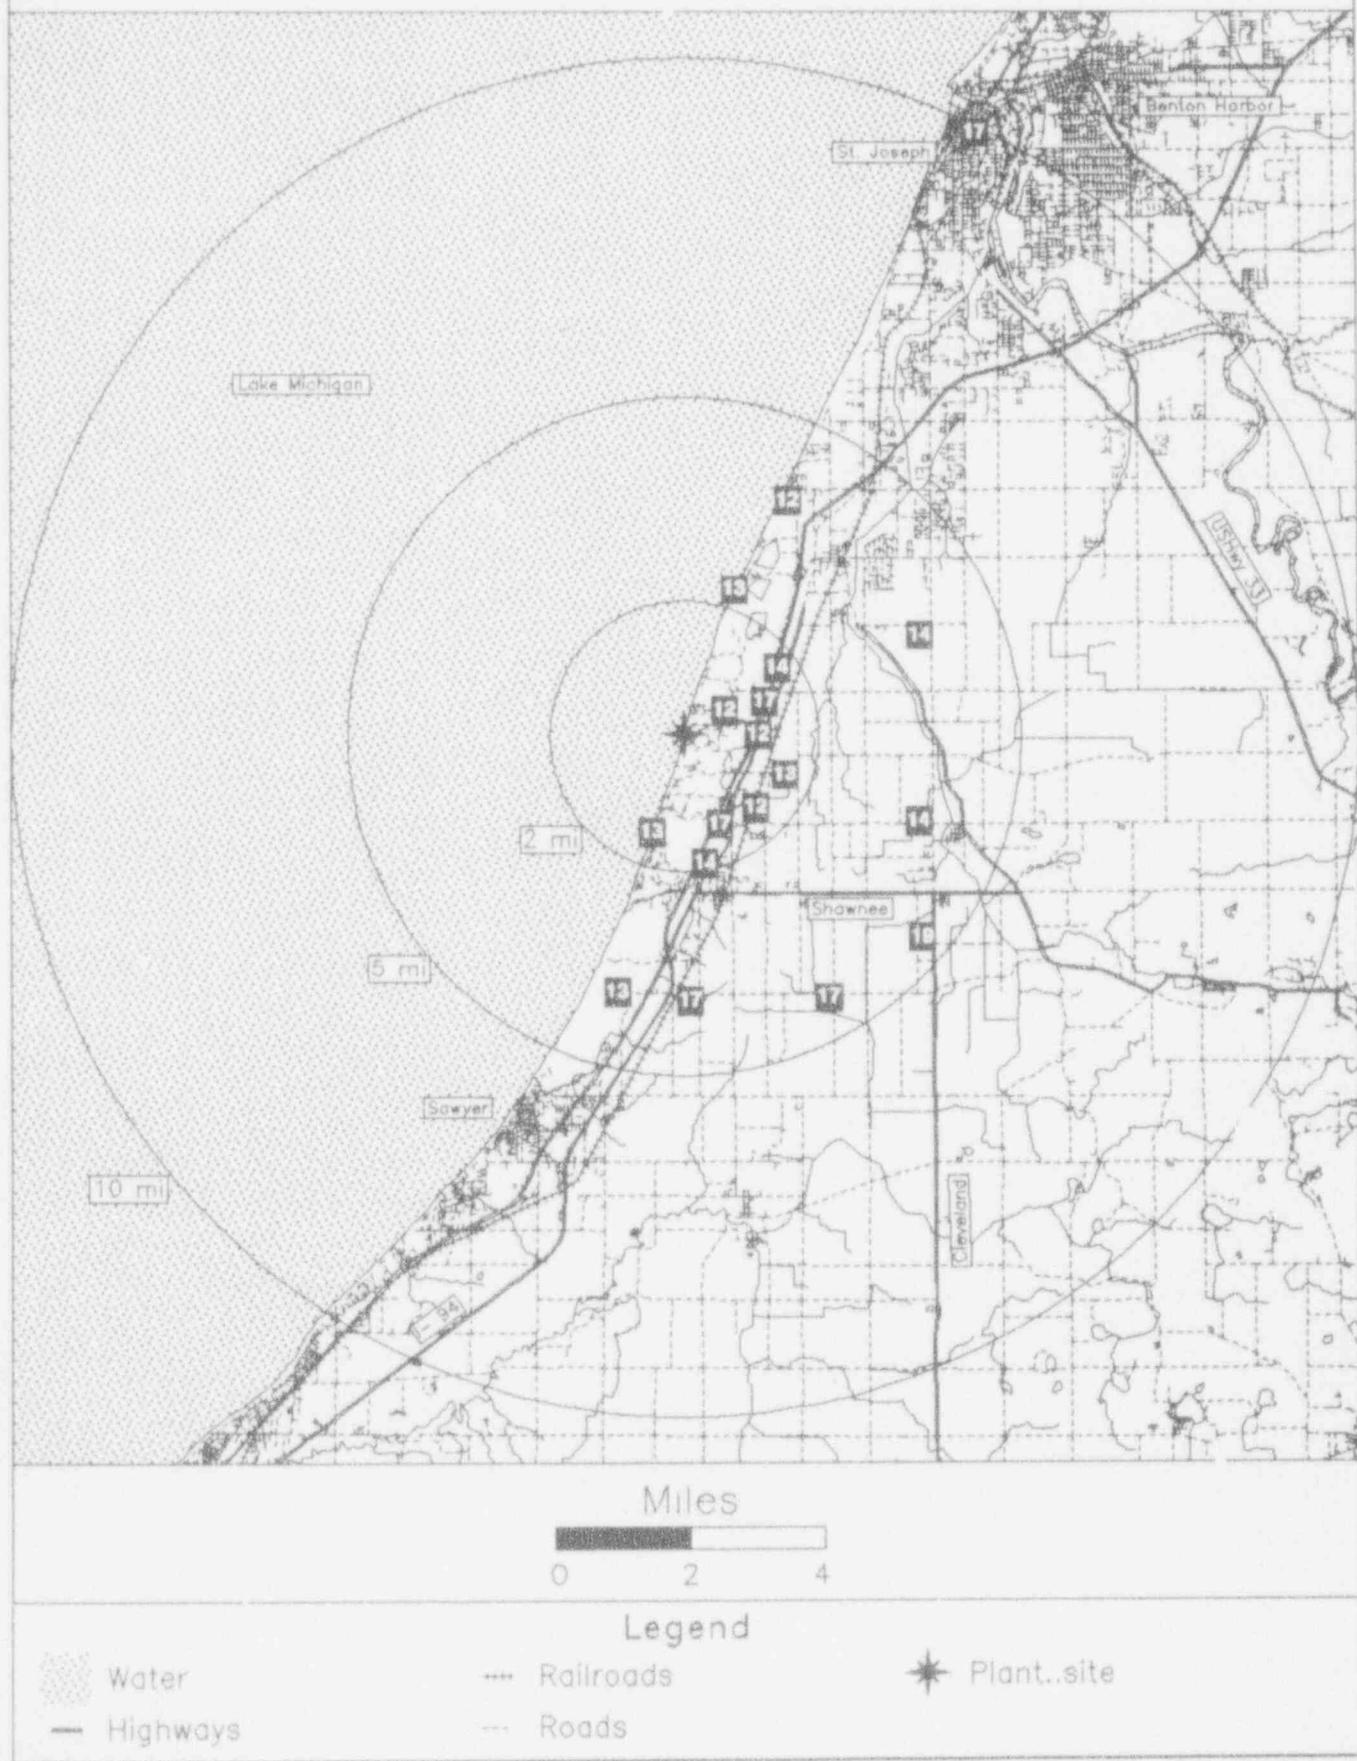

DIABLO CANYON

TLD Direct Radiation Environmental Monitoring
 For the period 930914-940127 136 Days
 Field Time: 100 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	132	0.9	30.6 +- 0.9; 4.6	22.9 +- 0.9; 5.1
2	119	3.9	26.8 +- 0.8; 4.0	19.5 +- 0.8; 4.7
3	107	7.2	24.1 +- 0.7; 3.6	17.0 +- 0.7; 4.4
4	111	10.3	25.0 +- 0.7; 3.7	17.9 +- 0.8; 4.5
5	115	13.9	26.3 +- 0.8; 4.0	19.1 +- 0.8; 4.6
6	68	9.4	25.7 +- 0.8; 3.9	18.5 +- 0.8; 4.6
7	359	11.1	23.7 +- 0.7; 3.6	16.7 +- 0.7; 4.4
8	359	6.6	19.7 +- 0.6; 3.0	13.1 +- 0.6; 4.0
9	339	4.8	20.0 +- 0.6; 3.0	13.3 +- 0.7; 4.0
10	327	3.6	20.9 +- 0.6; 3.1	14.2 +- 0.7; 4.1
11	325	1.2	20.5 +- 0.6; 3.1	13.8 +- 0.7; 4.1
12	36	20.7	29.3 +- 0.9; 4.4	21.7 +- 0.9; 5.0
13	36	20.7	28.8 +- 0.9; 4.3	21.3 +- 0.9; 4.9
14	36	20.7	29.3 +- 0.9; 4.4	21.7 +- 0.9; 5.0

Transit Dose = 5.2 +- 0.4; 3.3

DIABLO CANYON
For the period 930914-940127

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	14.9 +- 2.5	2
11.26 - 33.75 NNE	No Data +- No Data	0
33.76 - 56.25 NE	No Data +- No Data	0
56.26 - 78.75 ENE	18.5 +- 0.0	1
78.76 - 101.25 E	No Data +- No Data	0
101.26 - 123.75 ESE	18.4 +- 1.1	4
123.76 - 146.25 SE	22.9 +- 0.0	1
146.26 - 168.75 SSE	No Data +- No Data	0
168.76 - 191.25 S	No Data +- No Data	0
191.26 - 213.75 SSW	No Data +- No Data	0
213.76 - 236.25 SW	No Data +- No Data	0
236.26 - 258.75 WSW	No Data +- No Data	0
258.76 - 281.25 W	No Data +- No Data	0
281.26 - 303.75 WNW	No Data +- No Data	0
303.76 - 326.25 NW	13.8 +- 0.0	1
326.26 - 348.75 NNW	13.8 +- 0.6	2

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	18.3 +- 6.5	2
2 - 5	15.7 +- 3.3	3
> 5	17.0 +- 2.1	6
Upwind Control	21.6 +- 0.2	3

DIABLO CANYON
TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	132	SITE ENTRANCE RD.
2	119	SITE ENTRANCE RD.
3	107	SAN MIGUEL ST.
4	111	CORNER NAOMI AVE.
5	115	CORNER ATLANTIC CITY AVE.
6	68	PREFUMO CANYON RD.
7	359	PG&E MORROW BAY PLANT
8	359	PECHO VALLEY RD.
9	339	MONTANO DEORO PARK
10	327	PRIV. RD. END OF PECHO VALLEY
11	325	PRIV. RD. N. OF PLANT
12	36	SAN DIEGO RD.
13	36	SAN DIEGO RD.
14	36	SAN DIEGO RD.

NRC TLD DOSES FOR DIABLO CANYON AREA

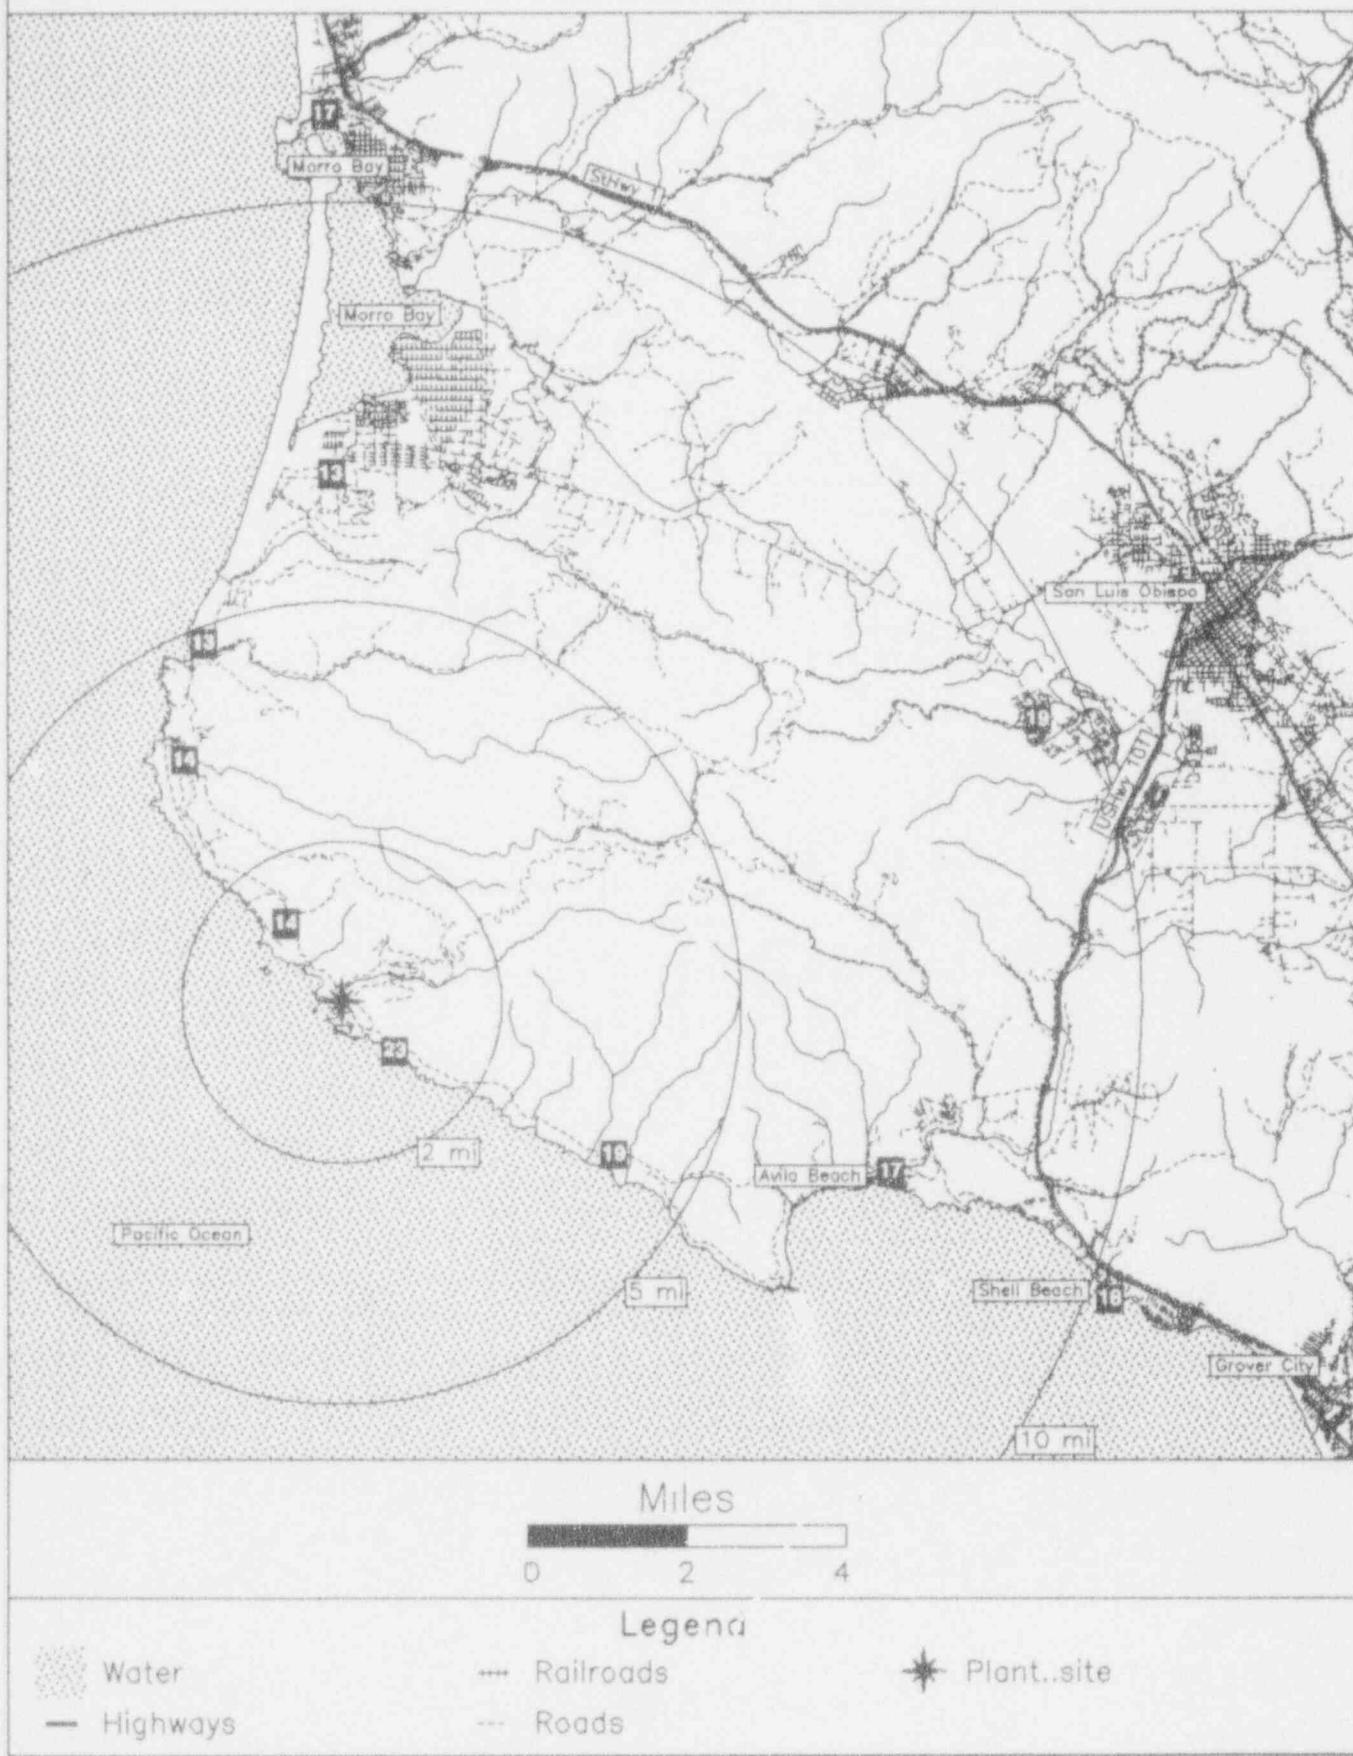

DRESDEN

TLD Direct Radiation Environmental Monitoring
 For the period 930914-940202 142 Days
 Field Time: 100 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	70	4.2	22.7 +- 0.7; 3.4	16.8 +- 0.7; 4.2
2	76	3.9	19.2 +- 0.6; 2.9	13.7 +- 0.6; 3.9
3	108	3.2	22.3 +- 0.7; 3.3	16.4 +- 0.7; 4.2
4	142	1.3	20.6 +- 0.6; 3.1	14.9 +- 0.6; 4.0
5	115	1.5	Damaged Dosimeter	No Net Data
6	180	1.9	21.5 +- 0.6; 3.2	15.7 +- 0.7; 4.1
7	179	0.5	21.7 +- 0.7; 3.3	15.9 +- 0.7; 4.1
8	180	0.7	20.0 +- 0.6; 3.0	14.4 +- 0.6; 4.0
9	253	0.5	23.9 +- 0.7; 3.6	17.9 +- 0.7; 4.3
10	254	1.3	28.5 +- 0.9; 4.3	22.0 +- 0.8; 4.8
11	250	1.5	19.9 +- 0.6; 3.0	14.2 +- 0.6; 4.0
12	263	2.1	22.7 +- 0.7; 3.4	16.8 +- 0.7; 4.2
13	180	4.0	18.9 +- 0.6; 2.8	13.4 +- 0.6; 3.9
14	158	4.8	20.6 +- 0.6; 3.1	14.9 +- 0.6; 4.0
15	137	4.2	18.8 +- 0.6; 2.8	13.2 +- 0.6; 3.9
16	134	8.4	20.5 +- 0.6; 3.1	14.8 +- 0.6; 4.0
17	189	7.4	20.9 +- 0.6; 3.1	15.1 +- 0.7; 4.0
18	203	4.1	18.0 +- 0.5; 2.7	12.5 +- 0.6; 3.8
19	231	4.0	20.7 +- 0.6; 3.1	15.0 +- 0.7; 4.0
20	244	6.4	21.1 +- 0.6; 3.2	15.3 +- 0.7; 4.1
21	258	8.6	22.4 +- 0.7; 3.4	16.5 +- 0.7; 4.2
22	269	4.4	19.2 +- 0.6; 2.9	13.6 +- 0.6; 3.9
23	295	3.3	20.1 +- 0.6; 3.0	14.5 +- 0.6; 4.0
24	311	3.9	22.1 +- 0.7; 3.3	16.3 +- 0.7; 4.2
25	340	4.7	24.0 +- 0.7; 3.6	17.9 +- 0.7; 4.4
26	7	4.4	21.2 +- 0.6; 3.2	15.5 +- 0.7; 4.1
27	355	2.0	26.1 +- 0.8; 3.9	19.9 +- 0.8; 4.6
28	327	1.7	27.1 +- 0.8; 4.1	20.7 +- 0.8; 4.7
29	318	1.4	22.8 +- 0.7; 3.4	16.9 +- 0.7; 4.2
30	295	2.0	19.7 +- 0.6; 2.9	14.0 +- 0.6; 3.9
31	30	1.5	24.1 +- 0.7; 3.6	18.0 +- 0.7; 4.4
32	48	1.9	27.0 +- 0.8; 4.0	20.6 +- 0.8; 4.7
33	76	1.4	23.9 +- 0.7; 3.6	17.8 +- 0.7; 4.3
34	90	1.4	21.6 +- 0.6; 3.2	15.8 +- 0.7; 4.1
35	26	4.5	22.2 +- 0.7; 3.3	16.3 +- 0.7; 4.2
36	42	3.6	20.9 +- 0.6; 3.1	15.2 +- 0.7; 4.1
37	52	11.5	21.8 +- 0.7; 3.3	16.0 +- 0.7; 4.1
38	274	21.5	23.1 +- 0.7; 3.5	17.2 +- 0.7; 4.3
39	274	21.5	22.5 +- 0.7; 3.4	16.6 +- 0.7; 4.2
40	275	21.5	24.1 +- 0.7; 3.6	18.0 +- 0.7; 4.4

Transit Dose = 4.1 +- 0.4; 3.2

DFESDEN
For the period 930914-940202

TLD Direct Radiation Environmental Monitoring

Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	17.7 +- 3.1	2
11.26 - 33.75 NNE	17.2 +- 1.2	2
33.76 - 56.25 NE	17.3 +- 2.9	3
56.26 - 78.75 ENE	16.1 +- 2.2	3
78.76 - 101.25 E	15.8 +- 0.0	1
101.26 - 123.75 ESE	16.4 +- 0.0	1
123.76 - 146.25 SE	14.3 +- 0.9	3
146.26 - 168.75 SSE	14.9 +- 0.0	1
168.76 - 191.25 S	14.9 +- 1.0	5
191.26 - 213.75 SSW	12.5 +- 0.0	1
213.76 - 236.25 SW	15.0 +- 0.0	1
236.26 - 258.75 WSW	17.2 +- 3.0	5
258.76 - 281.25 W	15.2 +- 2.3	2
281.26 - 303.75 WNW	14.3 +- 0.3	2
303.76 - 326.25 NW	16.6 +- 0.4	2
326.26 - 348.75 NNW	19.3 +- 2.0	2

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	17.2 +- 2.6	15
2 - 5	15.1 +- 1.6	16
> 5	15.5 +- 0.7	5
Upwind Control	17.3 +- 0.7	3

DRESDEN

TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	70	FRONTAGE RD.
2	76	FRONTAGE RD.
3	108	BLODGETT & N. RIVER RD.
4	142	COUNTY LINE RD. & BLODGETT RD.
5	115	DESPLAINES RIVER RD.
6	180	DRESDEN RD.
7	179	PLANT ENTRANCE - DRESDEN RD.
8	180	TAMARACK LANE
9	253	COLLINS RD.
10	254	COLLINS RD.
11	250	COLLINS RD.
12	263	COLLINS RD.
13	180	DRESDEN RD.
14	158	MURPHY RD.
15	137	GREER RD. & PINE BLUFF RD.
16	134	MAIN ST. (WILMINGTON)
17	189	COAL CITY WATER TOWER ON BROADWAY
18	203	COAL CITY RD. & CARPER RD.
19	231	JUGTOWN RD.
20	244	PINE BLUFF RD. & OLD PINE BLUFF RD.
21	258	NETTLE ST. SUBSTATION
22	269	CEMETERY RD. (ARMSTRONG)
23	301	TABLER RD. & U.S. 6 INTERSECTION
24	311	SAND RIDGE RD. & TABLER RD.
25	340	MINOOKA RD.
26	7	WABENA AVE.
27	355	RIDGE RD. & U.S. 6
28	327	MCLINDON RD.
29	318	HANSEN RD. & MCLINDON RD.
30	295	CEMETERY RD.
31	30	HANSEN RD.
32	48	MCKINLEY WOODS RD IN SECTS 19&30 (T.34N-R.9E)
33	76	MCKINLEY WOODS RD IN SECTS 19&30 (T.34N-R.9E)
34	90	MCKINLEY WOODS RD IN SECTS 19&30 (T.34N-R.9E)
35	26	OFF MCEVILLY RD AT NORTHCREST DRIVE
36	42	CENTER ST.
37	52	OFF U.S. 6 AT BRANDON RD. LOCK & DAM
38	274	INT. OF N 31 & E 24 ST.
39	274	INT. OF N 31 & E 24 ST.
40	275	INT. OF E 24 & N 32 ST.

NRC TLD DOSES FOR DRESDEN AREA



DUANE ARNOLD

TLD Direct Radiation Environmental Monitoring
 For the period 930914-940127 136 Days
 Field Time: 91 Days

NRC Sta	Location		Gross	Net Exposure Rate	Hist. Range
	Azimuth/Dist (Deg)/(Mi)		Exposure (mR) +-Rdm; Tot.	(mR/Std. Qtr.) +-Rdm; Tot.	Net Exp Rate +-1 Std Dev
1	163	9.7	20.6 +- 0.6; 3.1	18.0 +- 0.7; 4.1	16.5 +- 2.1
2	170	6.2	21.1 +- 0.6; 3.2	18.5 +- 0.7; 4.2	18.7 +- 1.9
3	180	3.5	19.2 +- 0.6; 2.9	16.6 +- 0.6; 4.0	15.4 +- 1.4
4	216	2.9	22.8 +- 0.7; 3.4	20.2 +- 0.7; 4.4	18.7 +- 2.4
5	201	2.5	18.8 +- 0.6; 2.8	16.2 +- 0.6; 3.9	15.2 +- 1.8
6	213	1.0	21.0 +- 0.6; 3.2	18.4 +- 0.7; 4.2	17.0 +- 1.9
7	248	1.0	22.4 +- 0.7; 3.4	19.8 +- 0.7; 4.3	18.9 +- 2.1
8	279	1.0	22.0 +- 0.7; 3.3	19.3 +- 0.7; 4.3	18.5 +- 2.0
9	298	1.0	23.2 +- 0.7; 3.5	20.6 +- 0.7; 4.4	19.5 +- 2.4
10	320	1.5	22.9 +- 0.7; 3.4	20.3 +- 0.7; 4.4	18.7 +- 2.2
11	343	1.0	23.2 +- 0.7; 3.5	20.5 +- 0.7; 4.4	19.4 +- 2.2
12	359	1.2	21.5 +- 0.6; 3.2	18.9 +- 0.7; 4.2	18.3 +- 2.0
13	237	0.5	20.4 +- 0.6; 3.1	17.8 +- 0.7; 4.1	17.5 +- 2.0
14	259	3.9	22.3 +- 0.7; 3.3	19.6 +- 0.7; 4.3	18.0 +- 2.2
15	272	5.0	18.6 +- 0.6; 2.8	16.0 +- 0.6; 3.9	15.2 +- 1.8
16	285	5.0	19.2 +- 0.6; 2.9	16.6 +- 0.6; 4.0	16.8 +- 1.8
17	308	4.5	23.3 +- 0.7; 3.5	20.7 +- 0.8; 4.5	18.8 +- 2.2
18	340	4.5	18.7 +- 0.6; 2.8	16.2 +- 0.6; 3.9	15.6 +- 1.6
19	291	15.0	20.7 +- 0.6; 3.1	18.1 +- 0.7; 4.2	17.0 +- 1.7
20	291	15.0	22.3 +- 0.7; 3.3	19.6 +- 0.7; 4.3	17.9 +- 2.1
21	291	15.0	20.8 +- 0.6; 3.1	18.2 +- 0.7; 4.2	16.5 +- 1.8
22	358	6.1	20.7 +- 0.6; 3.1	18.1 +- 0.7; 4.2	15.8 +- 1.6
23	7	2.9	18.9 +- 0.6; 2.8	16.4 +- 0.6; 4.0	15.3 +- 1.8
24	28	3.0	23.7 +- 0.7; 3.6	21.1 +- 0.8; 4.5	18.6 +- 2.1
25	39	3.5	21.6 +- 0.6; 3.2	18.9 +- 0.7; 4.3	17.2 +- 1.8
26	64	3.8	21.5 +- 0.6; 3.2	18.9 +- 0.7; 4.2	17.7 +- 1.8
27	50	1.9	19.8 +- 0.6; 3.0	17.2 +- 0.7; 4.1	15.6 +- 1.8
28	72	2.3	19.8 +- 0.6; 3.0	17.2 +- 0.7; 4.1	17.3 +- 1.6
29	91	3.0	19.8 +- 0.6; 3.0	17.2 +- 0.7; 4.1	15.5 +- 1.8
30	93	1.8	22.2 +- 0.7; 3.3	19.5 +- 0.7; 4.3	19.0 +- 1.8
31	113	2.0	23.7 +- 0.7; 3.5	21.0 +- 0.8; 4.5	19.2 +- 1.8
32	141	1.6	19.8 +- 0.6; 3.0	17.2 +- 0.7; 4.1	15.5 +- 1.8
33	153	1.5	22.5 +- 0.7; 3.4	19.9 +- 0.7; 4.4	17.6 +- 1.9
34	177	1.2	Damaged Dosimeter	No Net Data	15.8 +- 2.6
35	153	4.2	18.8 +- 0.6; 2.8	16.3 +- 0.6; 4.0	15.1 +- 1.8
36	135	4.1	19.7 +- 0.6; 3.0	17.1 +- 0.7; 4.0	16.5 +- 1.8
37	111	4.6	25.5 +- 0.8; 3.8	22.8 +- 0.8; 4.7	18.7 +- 1.8
38	123	5.1	23.3 +- 0.7; 3.5	20.6 +- 0.8; 4.4	18.7 +- 1.9
39	132	7.0	19.9 +- 0.6; 3.0	17.3 +- 0.7; 4.1	15.8 +- 1.6
40	139	7.6	19.0 +- 0.6; 2.8	16.4 +- 0.6; 4.0	16.6 +- 1.6

Transit Dose = 2.4 +- 0.3; 2.8

DUANE ARNOld
For the period 930914-940127

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	17.8 +- 1.3	3
11.26 - 33.75 NNE	21.1 +- 0.0	1
33.76 - 56.25 NE	18.1 +- 1.2	2
56.26 - 78.75 ENE	18.0 +- 1.2	2
78.76 - 101.25 E	18.4 +- 1.6	2
101.26 - 123.75 ESE	21.5 +- 1.2	3
123.76 - 146.25 SE	17.0 +- 0.4	4
146.26 - 168.75 SSE	18.0 +- 1.8	3
168.76 - 191.25 S	17.6 +- 1.3	2
191.26 - 213.75 SSW	17.3 +- 1.6	2
213.76 - 236.25 SW	20.2 +- 0.0	1
236.26 - 258.75 WSW	18.8 +- 1.4	2
258.76 - 281.25 W	18.3 +- 2.0	3
281.26 - 303.75 WNW	18.6 +- 2.8	2
303.76 - 326.25 NW	20.5 +- 0.3	2
326.26 - 348.75 NNW	18.3 +- 3.1	2

Distance From Reactor (r'les)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	19.3 +- 1.3	13
2 - 5	18.1 +- 2.1	17
> 5	18.1 +- 1.4	6
Upwind Control	18.7 +- 0.9	3

DUANE ARNOLD
TLD Direct Radiation Environmental Monitoring

NRC Station	Location	Azimuth / Distance	Description
		Degree / Mile	
1	163	9.7	EDGEWOOD RD.
2	170	6.2	HWY. 94 (COVINGTON)
3	180	3.5	PUBLIC USE AREA #11 (CHAIN BRIDGE RD)
4	216	2.9	E. 36 & HWY 94
5	201	2.5	MAJOR JCT IN PALO (E36 & W36)
6	213	1.0	COMP RD
7	248	1.0	S. OF R.R. ON W36 (PALO MARSH RD)
8	279	1.0	W36 PAST CULVERT
9	298	1.0	W36 E. SIDE FENCEPOST
10	320	1.5	W36 & MCCLINTOCK RD.
11	343	1.0	MCCLINTOCK RD.-E.
12	359	1.2	N. ON PRIVATE DRIVE
13	237	0.5	POWER PLANT RD.
14	259	3.9	BEAR CREEK RD AFTER CURVE
15	272	5.0	SHELLSBURG
16	285	5.0	W26
17	308	4.5	E24
18	340	4.5	E24 IN 'LEWIS PRESERVE' (LEWIS ACC.RD)
19	291	15.0	2ND AVE-VINTON LUTHERAN HOME
20	291	15.0	VINTON LUTHERAN HOME
21	291	15.0	HWY. 150
22	358	6.1	SUMMIT & IOWA STS(IN CENTER PT)
23	7	2.9	DREW LANE
24	28	3.0	QUAIL RIDGE RD
25	39	3.5	HWY 150(TULL LN & CENTER PT RD)
26	64	3.8	HWY 150(HAGERMAN RD & CENTER PT RD)
27	50	1.9	PONDS LANE
28	72	2.3	ON FENCE POST(STANDLEA RD)
29	91	3.0	FRONT DRIVE IN TODDVILLE
30	93	1.8	FEATHER RIDGE RD & WICKIUP HILL RD
31	113	2.0	N . OF KUEHL RESIDENCE(FEATHER RIDGE RD)
32	141	1.6	MORRIS HILLS RD & HORSESHOE LANE RD
33	153	1.5	MORRIS HILLS RD
34	177	1.2	FENCEPOST NEAR N. GATE(MORRIS HILLS RD)
35	153	4.2	BLAIRS FERRY RD AT CURVE
36	135	4.1	MILBURN RD.& OAK GROVE RD
37	111	4.6	CENTER POINT RD & SINGER HILL LANE
38	123	5.1	CENTER POINT RD & TOWER TERRACE RD
39	132	7.0	1ST AVE & CENTER PT RD IN HIAWATHA
40	139	7.6	J AVE & MAPLEWOOD DR IN CEDAR RAPIDS

NRC TLD DOSES FOR DUANE ARNOLD AREA

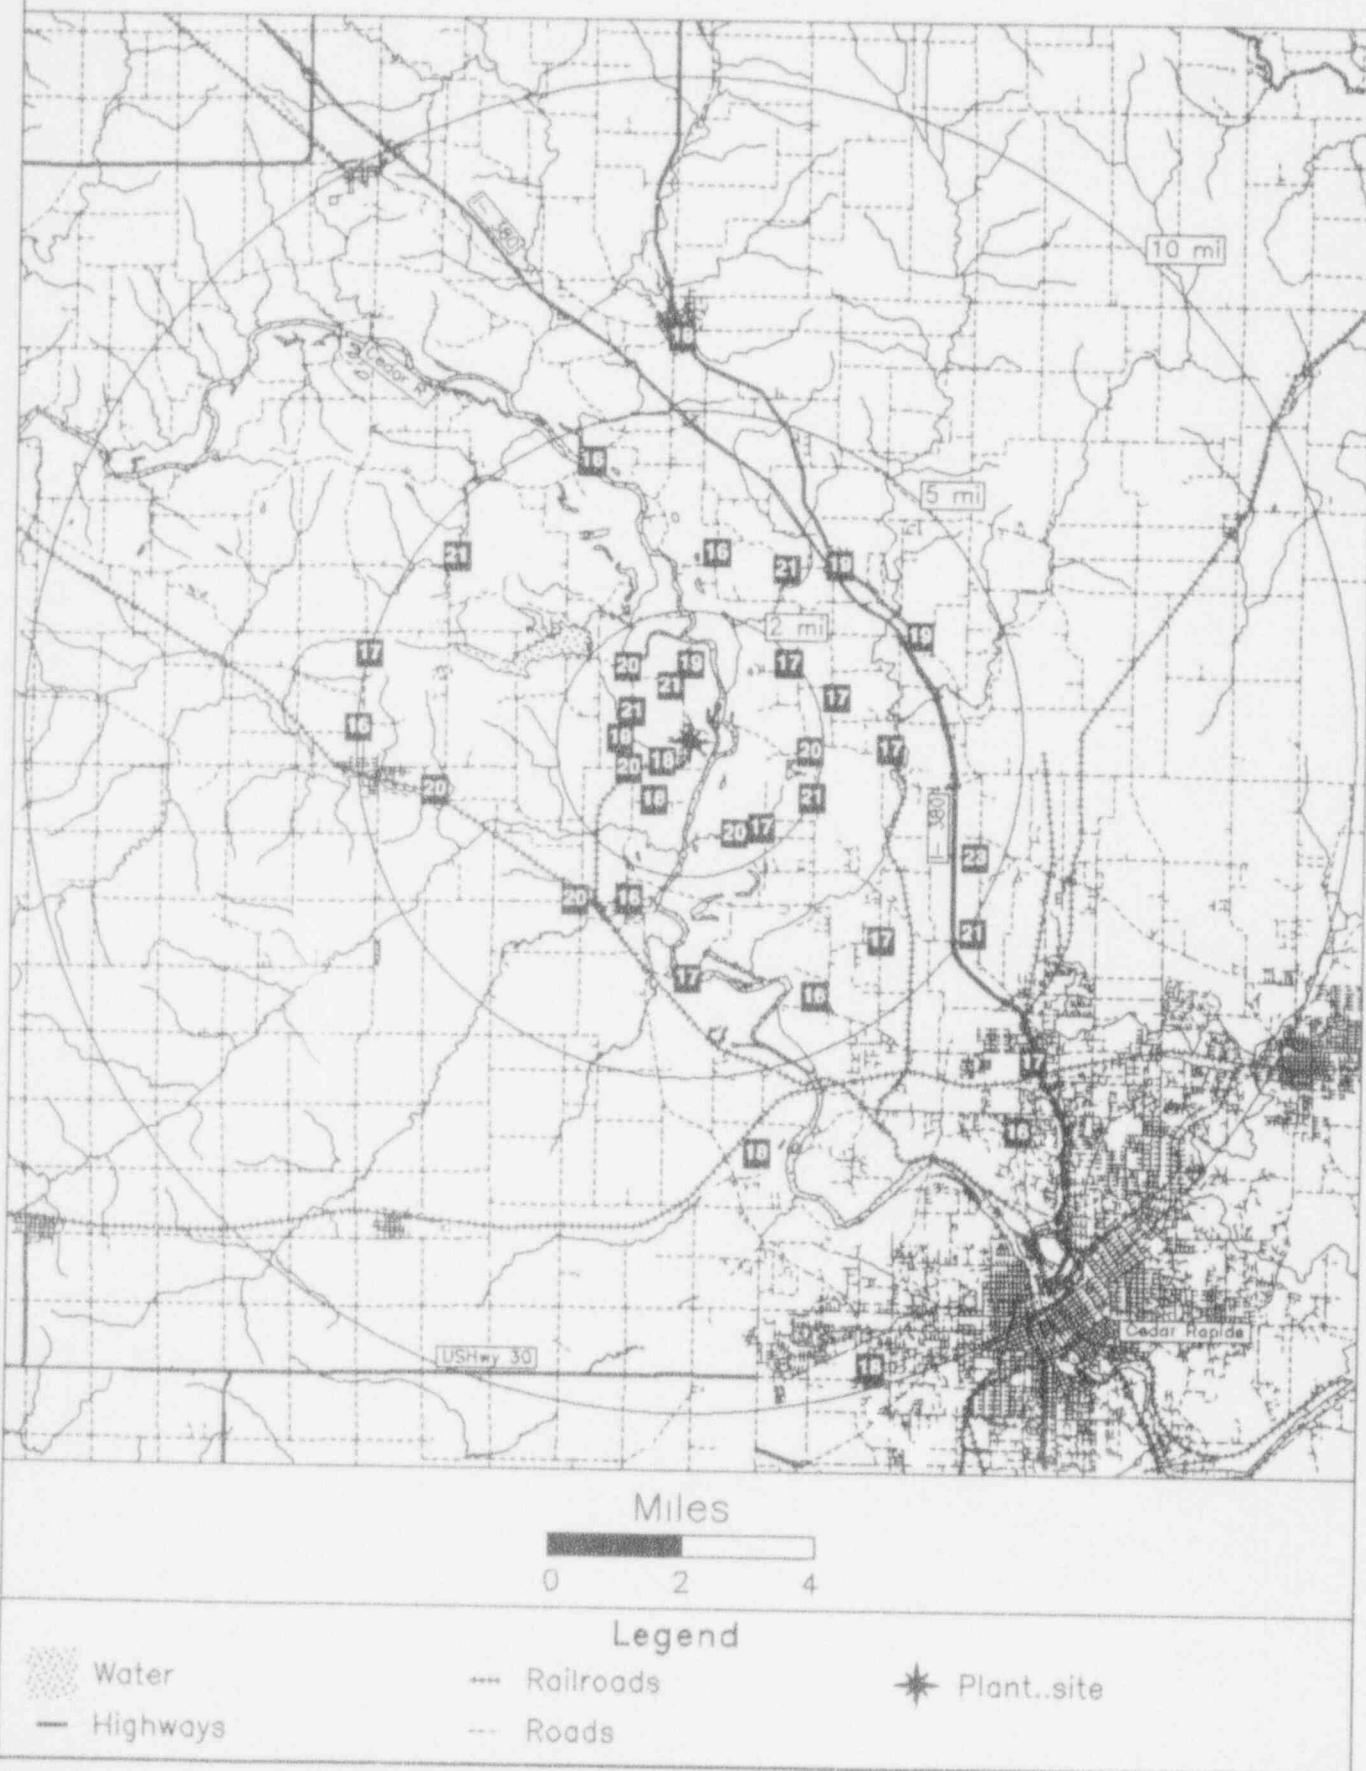

FARLEY
 TLD Direct Radiation Environmental Monitoring
 For the period 930915-940209 148 Days
 Field Time: 94 Days

NRC Sta	Location	Gross Exposure (mR)	Net Exposure Rate (mR/Std. Qtr.)	Hist. Range Net Exp Rate +/- Std Dev
	Azimuth/Dist (Deg)/(Mi)	+/-Rdm; Tot.	+/-Rdm; Tot.	
1	268	15.0	17.9 +/- 0.5; 2.7	14.4 +/- 2.6
2	252	7.8	18.1 +/- 0.5; 2.7	14.6 +/- 2.6
3	217	6.1	19.9 +/- 0.6; 3.0	15.7 +/- 2.2
4	155	5.7	23.8 +/- 0.7; 3.6	18.6 +/- 2.2
5	170	5.1	20.5 +/- 0.6; 3.1	15.6 +/- 2.2
6	197	4.5	19.2 +/- 0.6; 2.9	14.6 +/- 2.2
7	191	2.4	21.3 +/- 0.6; 3.2	18.3 +/- 2.7
8	200	1.8	21.2 +/- 0.6; 3.2	15.7 +/- 2.3
9	220	1.2	18.7 +/- 0.6; 2.8	14.1 +/- 2.3
10	254	0.9	21.6 +/- 0.6; 3.2	16.2 +/- 2.1
11	300	0.9	21.4 +/- 0.6; 3.2	16.0 +/- 2.1
12	319	1.1	20.3 +/- 0.6; 3.0	16.4 +/- 2.4
13	338	1.3	19.3 +/- 0.6; 2.9	14.7 +/- 2.1
14	256	1.2	18.8 +/- 0.6; 2.8	15.0 +/- 2.3
15	16	1.3	24.0 +/- 0.7; 3.6	20.4 +/- 2.2
16	264	1.6	19.5 +/- 0.6; 2.9	15.1 +/- 2.2
17	253	3.5	23.1 +/- 0.7; 3.5	17.2 +/- 2.2
18	233	3.2	19.5 +/- 0.6; 2.9	15.3 +/- 2.2
19	267	4.5	20.1 +/- 0.6; 3.0	16.2 +/- 2.2
20	295	3.8	20.0 +/- 0.6; 3.0	16.3 +/- 2.7
21	315	4.6	19.6 +/- 0.6; 2.9	14.6 +/- 2.4
22	332	4.3	18.7 +/- 0.6; 2.8	14.5 +/- 2.1
23	251	4.8	19.1 +/- 0.6; 2.9	14.1 +/- 2.2
24	32	5.3	21.0 +/- 0.6; 3.1	16.5 +/- 2.1
25	54	6.2	18.7 +/- 0.6; 2.8	14.3 +/- 2.3
26	64	5.5	20.8 +/- 0.6; 3.1	16.0 +/- 2.2
27	88	4.7	20.2 +/- 0.6; 3.0	15.7 +/- 2.2
28	124	5.1	21.2 +/- 0.6; 3.2	16.4 +/- 2.1
29	153	4.1	20.2 +/- 0.6; 3.0	15.7 +/- 2.2
30	142	3.6	19.2 +/- 0.6; 2.9	14.4 +/- 2.0
31	130	3.0	17.5 +/- 0.5; 2.6	13.5 +/- 2.3
32	110	2.8	18.2 +/- 0.5; 2.7	14.5 +/- 2.4
33	78	2.6	18.6 +/- 0.6; 2.8	14.4 +/- 2.5
34	58	2.2	17.8 +/- 0.5; 2.7	13.2 +/- 2.3
35	34	2.4	24.7 +/- 0.7; 3.7	19.4 +/- 2.3
36	19	2.7	21.8 +/- 0.7; 3.3	16.8 +/- 2.1
37	284	10.0	19.5 +/- 0.6; 2.9	15.7 +/- 2.3
38	289	15.0	22.9 +/- 0.7; 3.4	15.0 +/- 3.4
39	293	15.0	22.8 +/- 0.7; 3.4	16.7 +/- 1.9

Transit Dose = 6.3 +/- 0.4; 3.3

FARLEY

For the period 930915-940209

TLD Direct Radiation Environmental Monitoring

Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.75 - 11.25 N	No Data +- No Data	0
11.26 - 33.75 NNE	15.3 +- 1.5	3
33.76 - 56.25 NE	14.7 +- 4.1	2
56.26 - 78.75 ENE	12.2 +- 1.5	3
78.76 - 101.25 E	13.3 +- 0.0	1
101.26 - 123.75 ESE	11.4 +- 0.0	1
123.76 - 146.25 SE	12.4 +- 1.8	3
146.26 - 168.75 SSE	15.0 +- 2.4	2
168.76 - 191.25 S	14.0 +- 0.5	2
191.26 - 213.75 SSW	13.3 +- 1.3	2
213.76 - 236.25 SW	12.5 +- 0.6	3
236.26 - 258.75 WSW	13.3 +- 2.0	5
258.76 - 281.25 W	12.3 +- 1.1	3
281.26 - 303.75 WNW	13.8 +- 1.0	2
303.76 - 326.25 NW	13.1 +- 0.4	2
326.26 - 348.75 NNW	12.2 +- 0.5	2


Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	13.6 +- 1.6	9
2 - 5	13.0 +- 1.7	18
> 5	13.3 +- 1.8	5
Upwind Control	14.8 +- 1.9	3

FARLEY

TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Degree /	Distance / Mile	Description
1	268	15.0	DOTHON
2	252	7.8	ASHFORD (AL)
3	217	6.1	PANSEY (AL)
4	155	5.7	GORDON LANDING (AL)
5	170	5.1	MARSH RESIDENCE
6	197	4.5	PHIL. CHURCH RD.
7	191	2.4	HWY. 95 AT CEDAR CR.
8	200	1.8	UNION SPRINGS CHURCH RD.
9	220	1.2	WHATLEY FARM
10	254	0.9	FRONT GATE (AT SITE)
11	300	0.9	HWY. 95
12	319	1.1	HWY. 95 (FARLEY SITE)
13	338	1.3	DAMBSITE RD.
14	256	1.2	PIC STATION
15	16	1.3	DAMBSITE RD.
16	264	1.6	RT. 42
17	253	3.5	LANDFILL
18	233	3.2	UNION SPRINGS CHURCH
19	267	4.5	OAKY GROVE CH.
20	295	3.8	RT. 75 & RT. 33
21	315	4.6	HWY. 52 (AL)
22	332	4.3	HWY. 52 (AL)
23	251	4.8	COLUMBIA (AL)
24	32	5.3	HILTON (GA)
25	54	6.2	SAWHATCHEE (GA)
26	64	5.5	RD. 26 (GA)
27	88	4.7	CEDAR SPRINGS TOWER
28	124	5.1	CEDAR SPRINGS
29	153	4.1	HWY. 273 (GA)
30	142	3.6	HWY. 370 (GA)
31	130	3.0	HWY. 370 (GA)
32	110	2.8	HWY. 370 (GA)
33	78	2.6	HWY. 370 (GA)
34	58	2.2	RD. 81
35	34	2.4	RD. 81
36	19	2.7	ANDREWS LOCK & DAM RD.
37	284	10.0	WEBB (AL)
38	289	15.0	HWY. 431 (AL)
39	293	15.0	AL HWY. 431

NRC TLD DOSES FOR FARLEY AREA

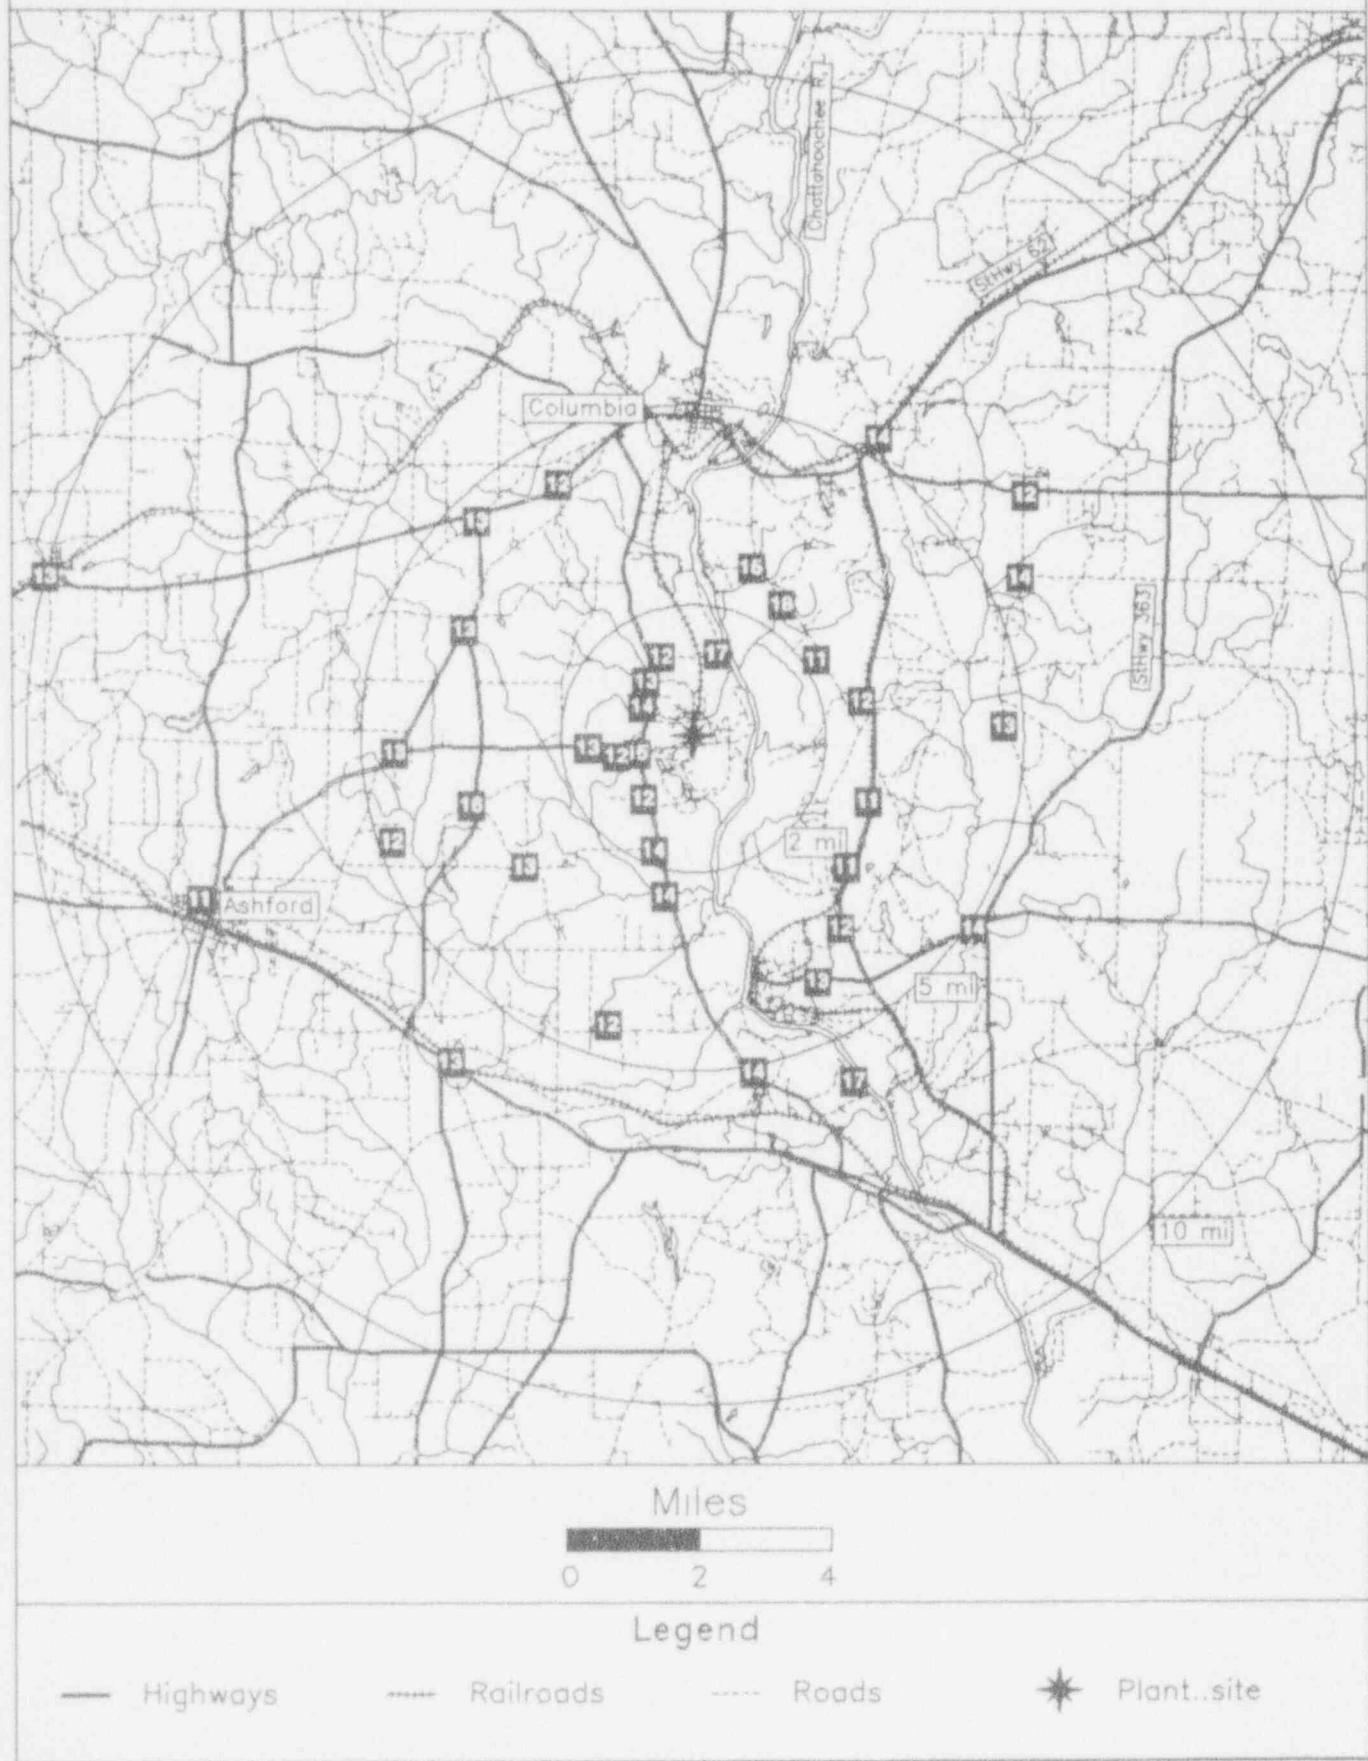

FERMI

TLD Direct Radiation Environmental Monitoring
 For the period 930914-940127 136 Days
 Field Time: 97 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	38	2.1	16.3 +- 0.5; 2.4	10.5 +- 0.6; 3.7
2	22	2.3	20.1 +- 0.6; 3.0	14.1 +- 0.7; 4.1
3	350	1.8	28.1 +- 0.8; 4.2	21.5 +- 0.9; 4.9
4	345	1.9	21.8 +- 0.7; 3.3	15.6 +- 0.7; 4.3
5	346	1.4	21.9 +- 0.7; 3.3	15.9 +- 0.7; 4.3
6	310	1.3	22.8 +- 0.7; 3.4	16.6 +- 0.7; 4.4
7	298	1.4	22.5 +- 0.7; 3.4	16.3 +- 0.7; 4.3
8	277	1.6	22.8 +- 0.7; 3.4	16.6 +- 0.7; 4.4
9	238	1.0	20.4 +- 0.6; 3.1	14.4 +- 0.7; 4.1
10	225	1.5	19.9 +- 0.6; 3.0	13.9 +- 0.7; 4.1
11	193	0.8	22.0 +- 0.7; 3.3	15.8 +- 0.7; 4.3
12	183	0.9	21.4 +- 0.6; 3.2	15.3 +- 0.7; 4.2
13	175	0.8	21.5 +- 0.6; 3.2	15.4 +- 0.7; 4.2
14	260	1.7	26.8 +- 0.8; 4.0	20.3 +- 0.8; 4.8
15	245	2.5	20.4 +- 0.6; 3.1	14.4 +- 0.7; 4.1
16	236	5.0	23.7 +- 0.7; 3.6	17.4 +- 0.8; 4.4
17	225	6.8	17.9 +- 0.5; 2.7	12.1 +- 0.6; 3.9
18	250	7.8	17.0 +- 0.5; 2.5	11.2 +- 0.6; 3.8
19	277	6.0	19.3 +- 0.6; 2.9	13.3 +- 0.6; 4.0
20	297	6.0	19.8 +- 0.6; 3.0	13.8 +- 0.7; 4.1
21	320	3.8	22.8 +- 0.7; 3.4	16.6 +- 0.7; 4.4
22	340	4.7	22.6 +- 0.7; 3.4	16.4 +- 0.7; 4.3
23	358	4.3	24.8 +- 0.7; 3.7	18.4 +- 0.8; 4.6
24	23	5.0	24.6 +- 0.7; 3.7	18.3 +- 0.8; 4.5
25	25	7.0	18.1 +- 0.5; 2.7	12.2 +- 0.6; 3.9
26	0	7.0	19.1 +- 0.6; 2.9	13.2 +- 0.6; 4.0
27	342	8.0	21.6 +- 0.6; 3.2	15.5 +- 0.7; 4.2
28	320	9.5	18.9 +- 0.6; 2.8	13.0 +- 0.6; 4.0
29	290	11.0	24.0 +- 0.7; 3.6	17.7 +- 0.8; 4.5
30	270	11.0	24.6 +- 0.7; 3.7	18.3 +- 0.8; 4.5
31	245	10.0	20.3 +- 0.6; 3.0	14.3 +- 0.7; 4.1
32	220	11.0	19.5 +- 0.6; 2.9	13.5 +- 0.7; 4.0
33	270	15.0	19.6 +- 0.6; 2.9	13.6 +- 0.7; 4.0
34	270	15.0	20.3 +- 0.6; 3.0	14.3 +- 0.7; 4.1
35	290	16.0	21.5 +- 0.6; 3.2	15.4 +- 0.7; 4.2
36	350	0.8	17.9 +- 0.5; 2.7	12.0 +- 0.6; 3.9
37	330	0.7	20.2 +- 0.6; 3.0	14.2 +- 0.7; 4.1
38	310	0.7	21.0 +- 0.6; 3.2	14.9 +- 0.7; 4.2
39	23	10.0	24.6 +- 0.7; 3.7	18.3 +- 0.8; 4.5
40	0	9.0	24.8 +- 0.7; 3.7	18.5 +- 0.8; 4.6
41	348	9.0	19.2 +- 0.6; 2.9	13.2 +- 0.6; 4.0

Transit Dose = 4.9 +- 0.4; 3.2

FERMI
For the period 930914-940127

TLD Direct Radiation Environmental Monitoring

Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	16.7 +- 4.0	5
11.26 - 33.75 NNE	15.7 +- 3.0	4
33.76 - 56.25 NE	10.5 +- 0.0	1
56.26 - 78.75 ENE	No Data +- No Data	0
78.76 - 101.25 E	No Data +- No Data	0
101.26 - 123.75 ESE	No Data +- No Data	0
123.76 - 146.25 SE	No Data +- No Data	0
146.26 - 168.75 SSE	No Data +- No Data	0
168.76 - 191.25 S	15.4 +- 0.1	2
191.26 - 213.75 SSW	15.8 +- 0.0	1
213.76 - 236.25 SW	14.2 +- 2.3	4
236.26 - 258.75 WSW	13.6 +- 1.6	4
258.76 - 281.25 W	17.1 +- 2.9	4
281.26 - 303.75 WNW	15.9 +- 1.9	3
303.76 - 326.25 NW	15.3 +- 1.7	4
326.26 - 348.75 NNW	15.1 +- 1.2	6


Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	15.9 +- 2.4	15
2 - 5	15.8 +- 2.7	8
> 5	14.5 +- 2.5	15
Upwind Control	14.4 +- 0.9	3

FERMI

TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	38	ESTRAL BEACH
2	22	PORT SUNLIGHT
3	350	STRONG&TROMBLY RDS.
4	345	SWAN VIEW DR.
5	346	POST&LEROUX RDS.
6	310	M.SMITH FARM
7	298	FERMI DR.&LEROUX RD.
8	277	TOLL(N. DIXIE&LEROUX RDS.)
9	238	FERMI ENTRANCE
10	225	ELM AND MAIN ST.
11	193	VENT PIPE(PT. AUX PEAX RD.)
12	183	DEWEY RD.
13	175	LONG RD.
14	260	JEFFERSON HIGH SCH.
15	245	WOODLAND BEACH
16	236	STERLING PARK
17	225	ENTRANCE TO DECO
18	250	ST. MARY'S PARK
19	277	DECO SUBSTATION
20	297	RT. 24&BUHL RD.
21	320	NEWPORT POST OFFICE
22	340	BRANDO&LABO RDS.
23	358	LABO&N.DIXIE HWY.
24	23	SHOOTING RANGE
25	25	CAMPAU RD.
26	0	S.ROCKWOOD
27	342	ROCKWOOD RD.
28	320	CARLETON TOWN
29	290	FINZEL RD.
30	270	RAISINVILLE RD.
31	245	HERR RD.
32	220	MORTAR RD.
33	270	LEWIS RD.
34	270	LEWIS RD.
35	290	MAYBEE RD.
36	350	TOLL-FISHER RD.(SITE)
37	330	TOLL RD.(SITE BOUNDRY)
38	310	TOLL RD.(SITE BOUNDRY)
39	23	GIBRALTAR & TURNPIKE
40	0	CAHILL RD.
41	348	RT. 24 & S. HURON DR. OPP. STATE POLICE STA.

NRC TLD DOSES FOR FERMI AREA

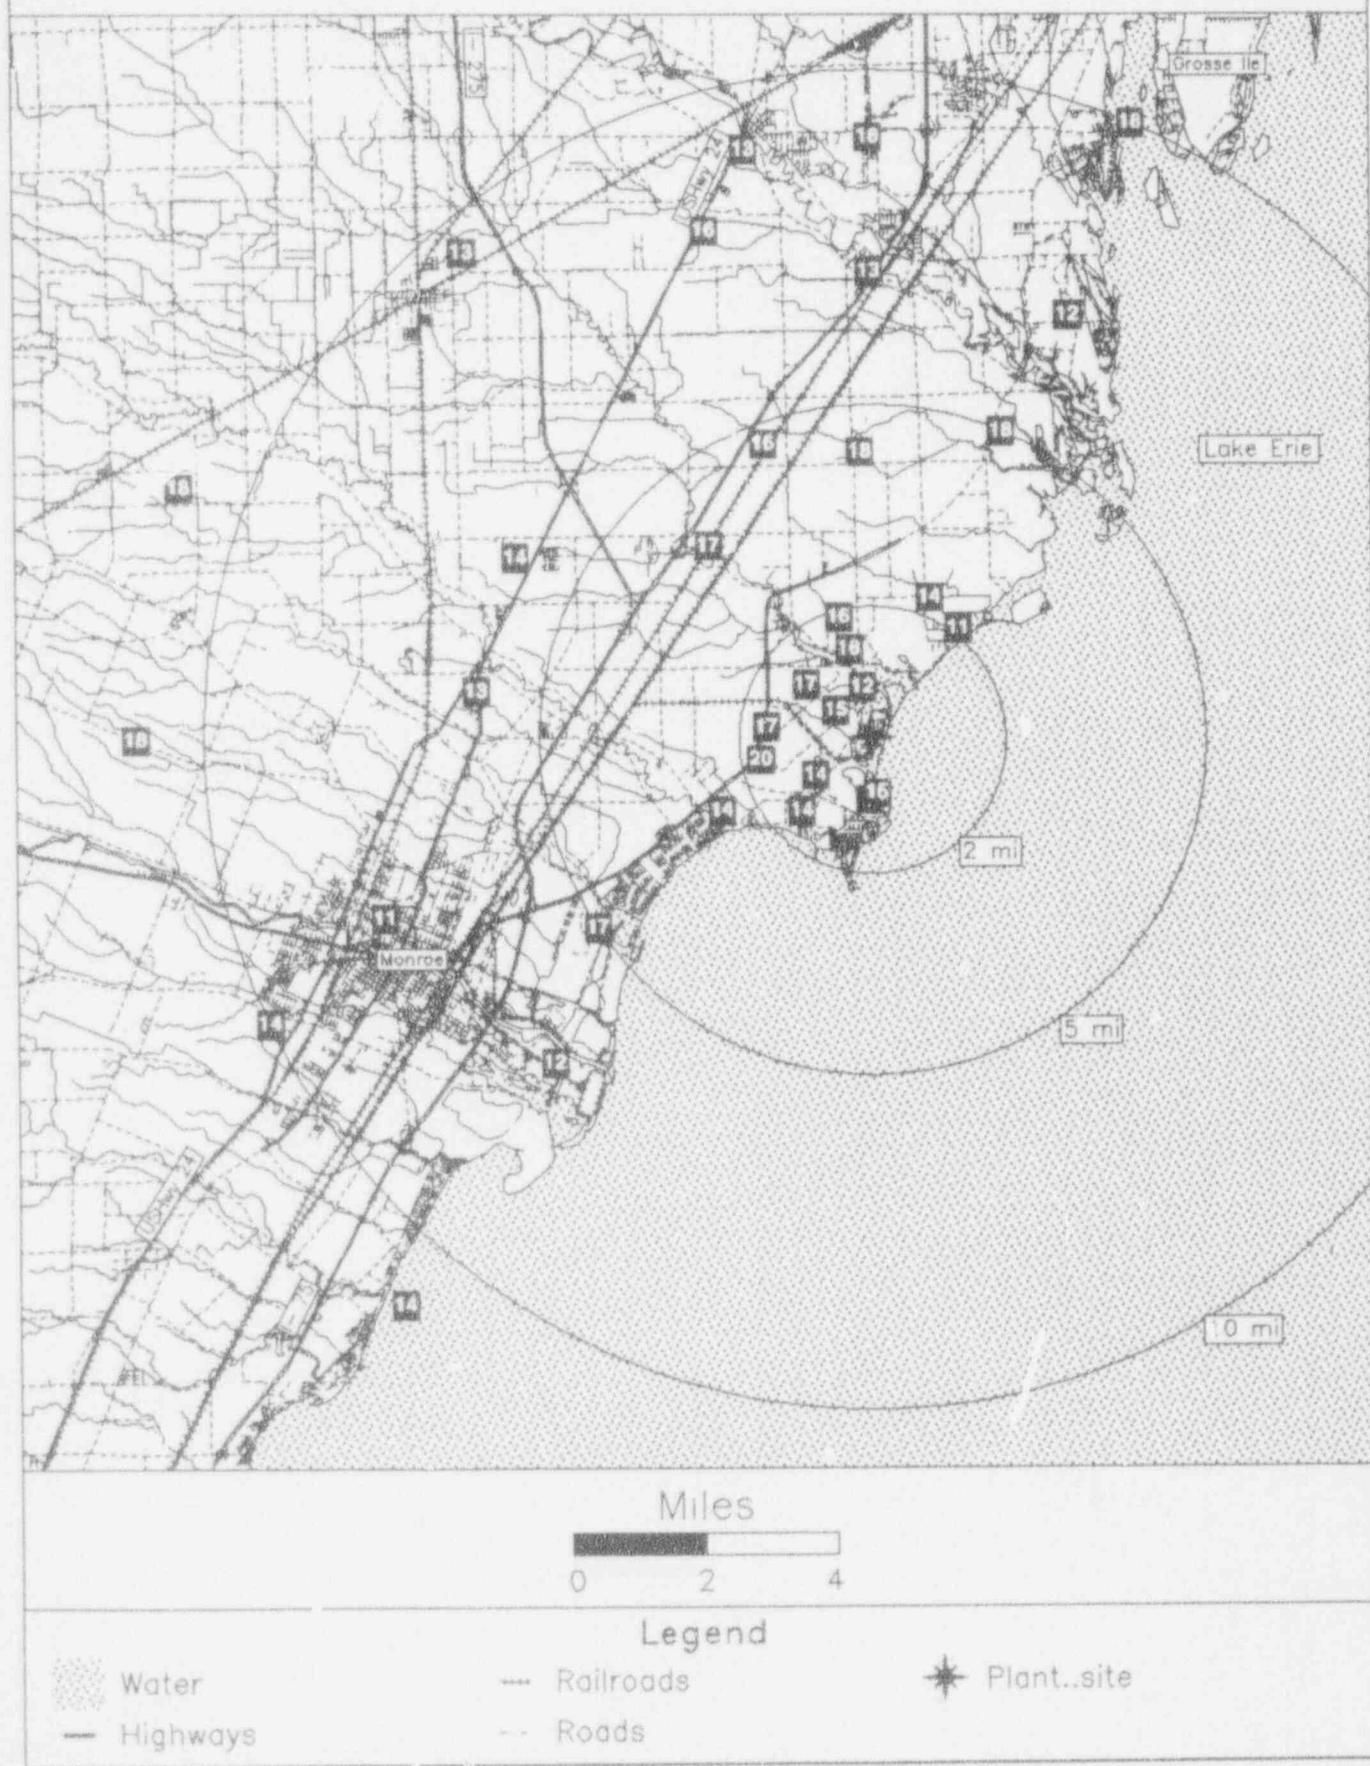

FITZ/NMP

TLD Direct Radiation Environmental Monitoring
 For the period 930915-940201 140 Days
 Field Time: 84 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Kdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	230 6.9	19.7 +- 0.6; 3.0	14.6 +- 0.8; 4.5	14.7 +- 1.4
2	184 14.0	21.3 +- 0.6; 3.2	16.2 +- 0.8; 4.7	15.8 +- 1.4
3	122 8.4	19.2 +- 0.6; 2.9	14.0 +- 0.7; 4.4	14.4 +- 1.6
4	76 11.0	Damaged Dosimeter	No Net Data	14.9 +- 1.0
5	91 6.8	20.5 +- 0.6; 3.1	15.4 +- 0.8; 4.6	15.4 +- 1.7
6	112 4.3	19.9 +- 0.6; 3.0	14.8 +- 0.8; 4.5	15.1 +- 1.1
7	138 4.3	Missing Dosimeter	No Net Data	15.1 +- 1.3
8	152 3.6	18.7 +- 0.6; 2.8	13.5 +- 0.7; 4.4	15.1 +- 1.4
-	183 3.9	19.7 +- 0.6; 3.0	14.6 +- 0.8; 4.5	15.4 +- 1.0
10	205 4.5	18.4 +- 0.6; 2.8	13.1 +- 0.7; 4.3	14.4 +- 1.5
11	220 4.4	19.9 +- 0.6; 3.0	14.8 +- 0.8; 4.5	15.3 +- 1.2
12	230 6.1	20.3 +- 0.6; 3.0	15.2 +- 0.8; 4.6	15.5 +- 1.3
13	245 1.8	20.2 +- 0.6; 3.0	15.1 +- 0.8; 4.5	15.2 +- 1.2
14	223 1.8	19.0 +- 0.6; 2.9	13.9 +- 0.7; 4.4	14.7 +- 1.3
15	204 2.0	18.4 +- 0.6; 2.8	13.1 +- 0.7; 4.3	14.7 +- 1.6
16	181 1.8	19.5 +- 0.6; 2.9	14.4 +- 0.8; 4.5	14.9 +- 1.2
17	157 1.9	18.4 +- 0.6; 2.8	13.1 +- 0.7; 4.3	15.1 +- 1.1
18	137 1.6	19.5 +- 0.6; 2.9	14.4 +- 0.8; 4.5	14.7 +- 1.2
19	115 1.2	18.8 +- 0.6; 2.8	13.6 +- 0.7; 4.4	14.9 +- 1.6
20	92 1.1	19.2 +- 0.6; 2.9	14.0 +- 0.7; 4.4	15.5 +- 1.3
21	229 20.0	19.6 +- 0.6; 2.9	14.5 +- 0.8; 4.5	14.8 +- 1.4
22	229 20.0	19.1 +- 0.6; 2.9	13.9 +- 0.7; 4.4	14.5 +- 1.2
23	229 20.0	19.6 +- 0.6; 2.9	14.5 +- 0.8; 4.5	14.7 +- 1.2
24	196 8.0	19.1 +- 0.6; 2.9	13.9 +- 0.7; 4.4	14.5 +- 1.5
25	168 7.2	19.6 +- 0.6; 2.9	14.4 +- 0.8; 4.5	14.3 +- 1.2
26	152 0.6	20.9 +- 0.6; 3.1	15.8 +- 0.8; 4.6	16.1 +- 1.2

Transit Dose = 6.1 +- 0.4; 3.0

FITZ/NMP
For the period 930915-940201

TLD Direct Radiation Environmental Monitoring

Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	No Data +- No Data	0
11.26 - 33.75 NNE	No Data +- No Data	0
33.76 - 56.25 NE	No Data +- No Data	0
56.26 - 78.75 ENE	No Data +- No Data	0
78.76 - 101.25 E	14.7 +- 1.0	2
101.26 - 123.7 ^E ESE	14.1 +- 0.6	3
123.76 - 146.25 SE	14.4 +- 0.0	1
146.26 - 168.75 SSE	14.2 +- 1.2	4
168.76 - 191.25 S	15.1 +- 1.0	3
191.26 - 213.75 SSW	13.4 +- 0.5	3
213.76 - 236.25 SW	14.6 +- 0.6	4
236.26 - 258.75 WSW	15.1 +- 0.0	1
258.76 - 281.25 W	No Data +- No Data	0
281.26 - 303.75 WNW	No Data +- No Data	0
303.76 - 326.25 NW	No Data +- No Data	0
326.26 - 348.75 NNW	No Data +- No Data	0


Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	14.1 +- 0.9	9
2 - 5	14.2 +- 0.8	5
> 5	14.8 +- 0.8	7
Upwind Control	14.3 +- 0.3	3

FITZ/NMP

TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	230	OAK HILL SCHOOL
2	184	FULTON
3	122	MEXICO
4	76	SELKIRK SHORES PARK
5	91	MEXICO PT. BOAT LAUNCH
6	112	DEMSTER BEACH RD.
7	138	ALBRIGHT RD.
8	152	MIDDLE RD.
9	183	DUKE RD.
10	205	CREMERY RD.
11	220	Z RIDGE FARM
12	230	ST. PAUL'S ST.
13	245	LAKEVIEW WATERFRONT
14	223	LAKEVIEW RD.
15	204	MINER RD.
16	181	HOPKINS RESIDENCE
17	157	PARKHURST RD.
18	137	DAWNS BEAUTY SHOP
19	115	LAKE RD.
20	92	NOYES RESIDENCE
21	229	FAIR HAVEN STATE PARK
22	229	FAIR HAVEN STATE PARK
23	229	FAIR HAVEN STATE PARK
24	196	FROST ROAD
25	168	O'CONNOR RD.
26	152	NEAREST RESIDENT

NRC TLD DOSES FOR FITZPATRICK & NINE MILE PT AREA

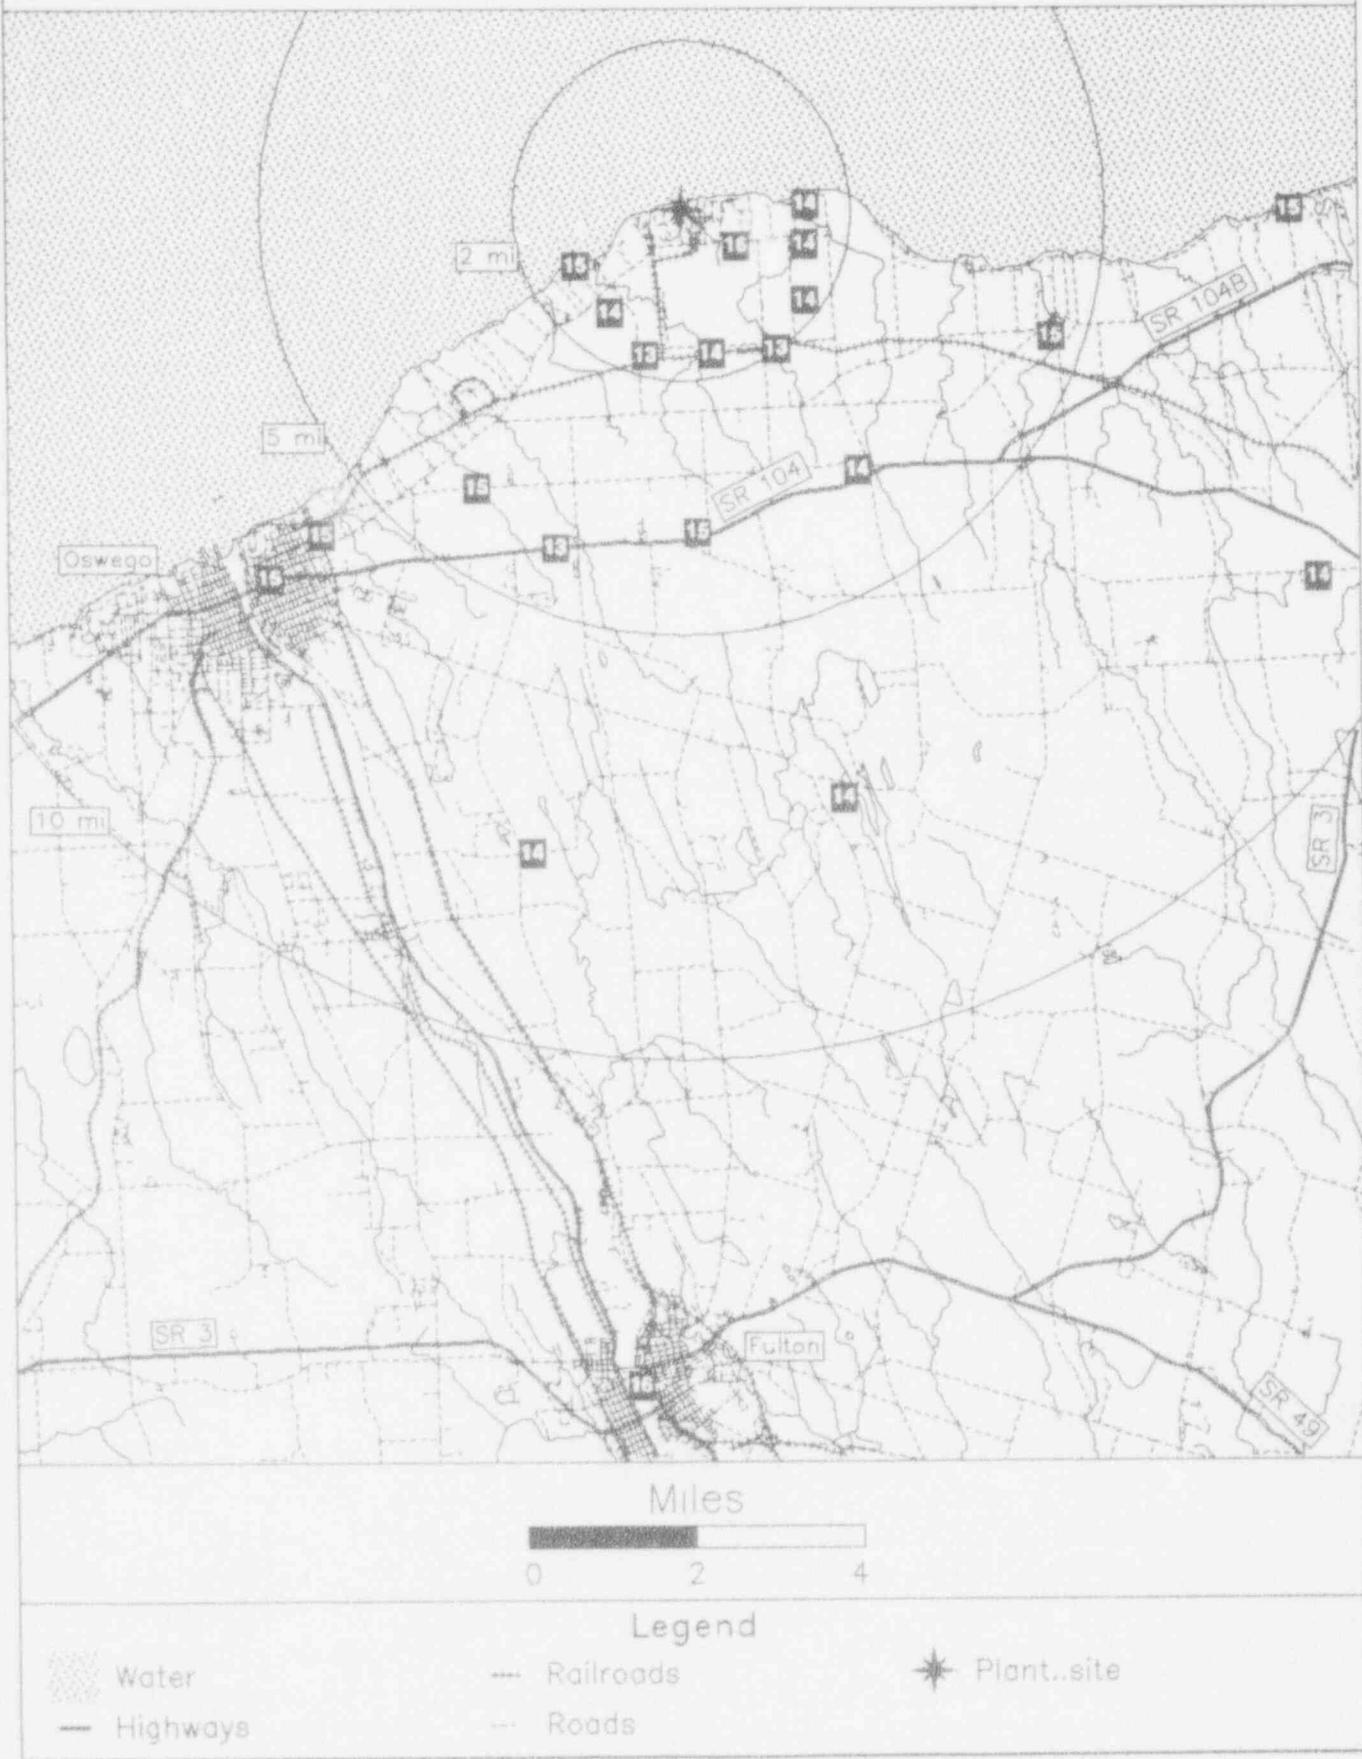

FORT CALHOUN

TLD Direct Radiation Environmental Monitoring
 For the period 930914-940209 149 Days
 Field Time: 100 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	358	2.0	27.1 +- 0.8; 4.1	19.2 +- 0.8; 4.8
2	351	4.6	27.9 +- 0.8; 4.2	19.8 +- 0.8; 4.8
3	30	2.5	27.6 +- 0.8; 4.1	19.6 +- 0.8; 4.8
4	27	4.6	26.1 +- 0.8; 3.9	18.2 +- 0.8; 4.7
5	53	1.9	26.6 +- 0.8; 4.0	18.7 +- 0.8; 4.7
6	37	3.9	28.8 +- 0.9; 4.3	20.7 +- 0.9; 4.9
7	76	2.3	27.6 +- 0.8; 4.1	19.6 +- 0.8; 4.8
8	59	5.2	27.8 +- 0.8; 4.2	19.8 +- 0.8; 4.8
9	100	2.3	26.7 +- 0.8; 4.0	18.8 +- 0.8; 4.7
10	88	5.6	27.8 +- 0.8; 4.2	19.8 +- 0.8; 4.8
11	122	2.3	28.0 +- 0.8; 4.2	19.9 +- 0.8; 4.9
12	105	5.7	27.2 +- 0.8; 4.1	19.3 +- 0.8; 4.8
13	145	1.9	27.6 +- 0.8; 4.1	19.6 +- 0.8; 4.8
14	128	5.5	27.8 +- 0.8; 4.2	19.8 +- 0.8; 4.8
15	157	1.9	28.3 +- 0.8; 4.2	20.2 +- 0.9; 4.9
16	150	4.9	27.6 +- 0.8; 4.1	19.6 +- 0.8; 4.8
17	173	0.5	27.4 +- 0.8; 4.1	19.4 +- 0.8; 4.8
18	173	5.3	28.6 +- 0.9; 4.3	20.5 +- 0.9; 4.9
19	212	2.5	29.6 +- 0.9; 4.4	21.4 +- 0.9; 5.0
20	204	5.3	28.8 +- 0.9; 4.3	20.6 +- 0.9; 4.9
21	233	2.0	28.9 +- 0.9; 4.3	20.7 +- 0.9; 4.9
22	224	4.6	28.2 +- 0.8; 4.2	20.2 +- 0.9; 4.9
23	239	0.6	28.8 +- 0.9; 4.3	20.7 +- 0.9; 4.9
24	243	6.9	25.8 +- 0.8; 3.9	17.9 +- 0.8; 4.6
25	269	3.3	29.6 +- 0.9; 4.4	21.4 +- 0.9; 5.0
26	262	5.9	31.3 +- 0.9; 4.7	22.9 +- 0.9; 5.2
27	350	3.0	25.6 +- 0.8; 3.8	17.8 +- 0.8; 4.6
28	292	5.0	29.9 +- 0.9; 4.5	21.7 +- 0.9; 5.1
29	311	2.4	28.6 +- 0.9; 4.3	20.5 +- 0.9; 4.9
30	310	5.5	29.9 +- 0.9; 4.5	21.7 +- 0.9; 5.1
31	340	2.3	27.1 +- 0.8; 4.1	19.2 +- 0.8; 4.8
32	338	5.3	Missing Dosimeter	No Net Data
33	182	0.5	27.3 +- 0.8; 4.1	19.4 +- 0.8; 4.8
35	127	2.2	26.8 +- 0.8; 4.0	18.9 +- 0.8; 4.7
39	150	5.0	26.3 +- 0.8; 3.9	18.5 +- 0.8; 4.7
40	73	9.5	28.2 +- 0.8; 4.2	20.1 +- 0.9; 4.9
43	29	8.0	26.3 +- 0.8; 3.9	18.4 +- 0.8; 4.7
44	65	3.5	25.8 +- 0.8; 3.9	18.0 +- 0.8; 4.6
45	182	4.2	28.8 +- 0.9; 4.3	20.7 +- 0.9; 4.9
47	298	4.5	26.9 +- 0.8; 4.0	19.0 +- 0.8; 4.7
48	13	14.0	27.0 +- 0.8; 4.0	19.0 +- 0.8; 4.7
49	207	18.0	29.9 +- 0.9; 4.5	21.7 +- 0.9; 5.1

Transit Dose = 5.8 +- 0.4; 3.4

FORT CALHOUN
For the period 930914-940209

TID Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	18.9 +- 1.0	3
11.26 - 33.75 NNE	18.7 +- 0.7	3
33.76 - 56.25 NE	19.7 +- 1.4	2
56.26 - 78.75 ENE	19.4 +- 0.9	4
78.76 - 101.25 E	19.3 +- 0.7	2
101.26 - 123.75 ESE	19.6 +- 0.5	2
123.76 - 146.25 SE	19.4 +- 0.5	3
146.26 - 168.75 SSE	19.4 +- 0.9	3
168.76 - 191.25 S	20.0 +- 0.7	4
191.26 - 213.75 SSW	21.0 +- 0.5	2
213.76 - 236.25 SW	20.4 +- 0.4	2
236.26 - 258.75 WSW	19.3 +- 1.9	2
258.76 - 281.25 W	22.1 +- 1.1	2
281.26 - 303.75 WNW	20.3 +- 1.9	2
303.76 - 326.25 NW	21.1 +- 0.8	2
326.26 - 348.75 NNW	19.2 +- 0.0	1

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	19.7 +- 0.7	8
2 - 5	19.7 +- 1.1	20
> 5	20.1 +- 1.4	11
Upwind Control	20.3 +- 1.9	2

FORT CALHOUN
TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	358	DIRT RD. (1 MILE E. OF MISSOURI R.)
2	351	COTTONWOOD MARINA
3	30	HWY. 30 (2 MILES E. OF MISSOURI R.)
4	27	OLD SOLDIER R. DITCH
5	53	DIRT FARM RD. NEAR US 30
5	37	GRAVEL RD. NEAR US 30
7	76	DESOTO REFUGE
8	59	CALIF. JUNCT. (1ST INTERSEC. N OF RR)
9	100	RIVER GAUGING STATION
10	88	FARM RD. NEAR US 30
11	122	DESOTO REGUGE ENTRANCE GATE
12	105	FARMHOUSE NEAR US 30
13	145	DESOTO
14	128	TRAILER PARK
15	157	INTERSECTION P226 & P39
16	150	CEMETERY (CLAY RD.)
17	173	NEAR PLANT ENTRANCE
18	173	INTERSECTION P39 & P132
19	212	COUNTY RD.P35(AT INTERSEC-GRAVEL RD)
20	204	COUNTY RD.P34 (0.5 MI. E OF HWY 133)
21	233	COUNTY RD. P35(1.3 MI N OF RD. P128)
22	224	HWY. 133 (3.4 MILES S. OF BLAIR)
23	239	1 MILE N. ON HWY. 73 FROM PLANT ENTRANCE
24	243	KENNARD
25	269	HWY. 30 & 133
26	262	COUNTY RDS.P26 &P27
27	350	BLAIR
28	292	BLAIR FARMHOUSE
29	311	ANIMAL CONTROL BLDG.
30	310	US 73 NEAR ROAD TO CHURCH
31	340	FIRST INTERSECTION W. OF BLAIR RD.
32	338	COTTONWOOD MARINA
33	182	GREENHOUSE PLANT ENTRANCE
35	127	SMITH FARM
39	150	FORT ATKINSON
40	73	MISSOURI VALLEY
43	29	MODALE SCHOOL
44	65	CLOSED PICNIC AREA - DESOTO REFUGE
45	182	SCHOOL #8
47	298	DANA COLLEGE
48	13	1 MILE EAST OF MONDAMIN
49	207	ELKHORN

NRC TLD DOSES FOR FORT CALHOUN AREA

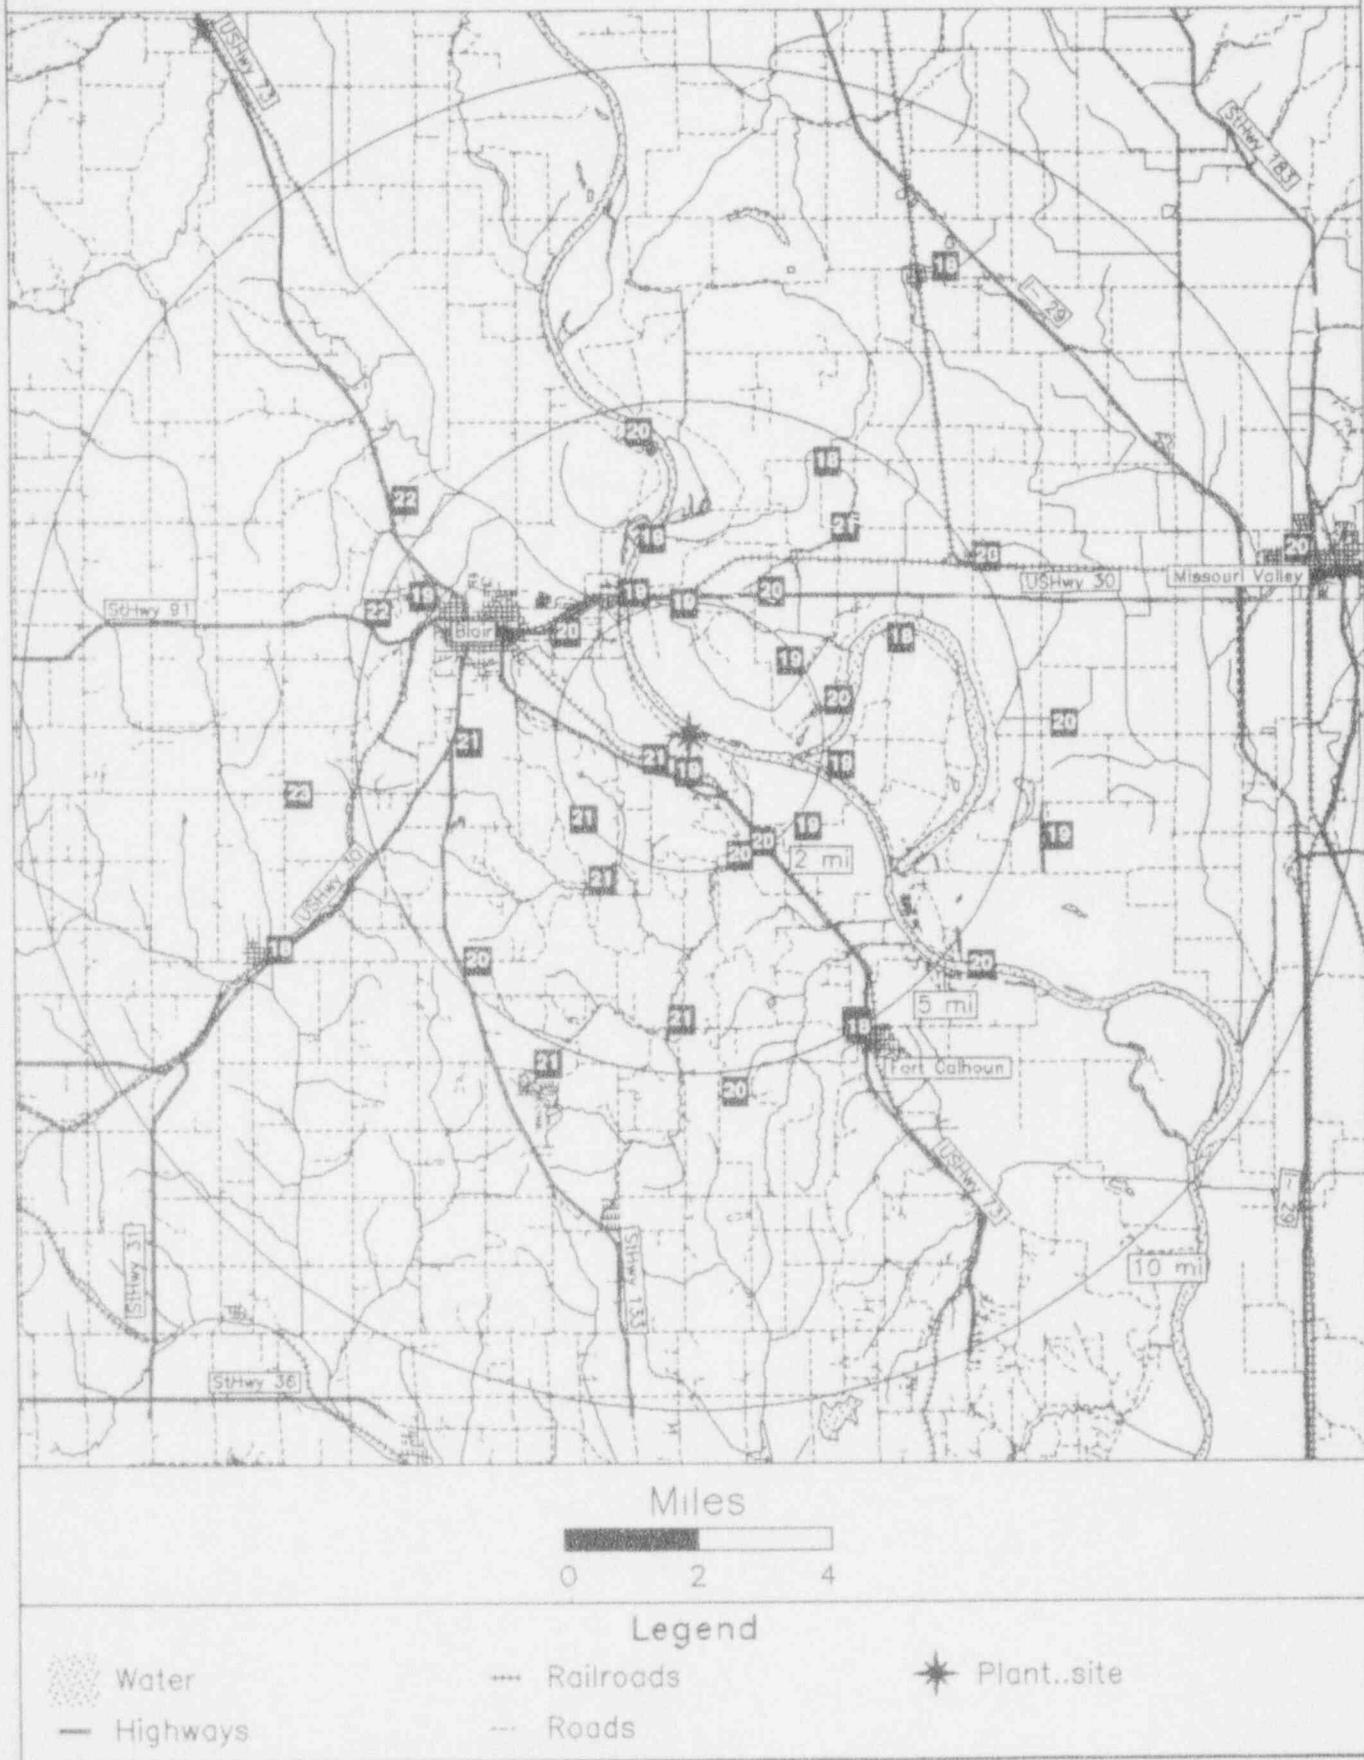

FORT ST. VRAIN

TLD Direct Radiation Environmental Monitoring
 For the period 930913-940202 143 Days
 Field Time: 84 Days

NRC Sta	Location	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	8	0.8 39.9 +- 1.2; 6.0	28.1 +- 1.4; 7.6	30.0 +- 3.1
2	2	3.3 41.2 +- 1.2; 6.2	29.4 +- 1.5; 7.8	29.4 +- 3.2
3	29	2.6 39.3 +- 1.2; 5.9	27.5 +- 1.4; 7.5	29.8 +- 3.4
4	17	5.4 40.0 +- 1.2; 6.0	28.1 +- 1.4; 7.6	30.1 +- 3.5
5	54	2.1 40.0 +- 1.2; 6.0	28.2 +- 1.4; 7.6	28.7 +- 3.5
6	48	4.8 43.1 +- 1.3; 6.5	31.5 +- 1.5; 8.0	30.8 +- 3.0
7	76	2.6 41.2 +- 1.2; 6.2	29.5 +- 1.5; 7.8	31.7 +- 3.3
8	58	4.2 41.7 +- 1.3; 6.3	30.0 +- 1.5; 7.9	30.4 +- 3.0
9	100	1.5 39.4 +- 1.2; 5.9	27.5 +- 1.4; 7.5	30.8 +- 3.2
10	87	4.5 39.6 +- 1.2; 5.9	27.8 +- 1.4; 7.6	29.3 +- 3.1
11	118	1.6 42.7 +- 1.3; 6.4	31.1 +- 1.5; 8.0	33.0 +- 3.5
12	104	3.0 40.9 +- 1.2; 6.1	29.1 +- 1.5; 7.7	32.3 +- 3.0
13	143	1.6 41.5 +- 1.2; 6.2	29.7 +- 1.5; 7.8	30.9 +- 3.2
14	128	4.5 39.9 +- 1.2; 6.0	28.1 +- 1.4; 7.6	30.8 +- 2.9
15	168	2.3 38.6 +- 1.2; 5.8	26.6 +- 1.4; 7.4	28.5 +- 2.9
16	148	4.6 39.1 +- 1.2; 5.9	27.2 +- 1.4; 7.4	28.6 +- 3.0
17	182	0.8 39.4 +- 1.2; 5.9	27.5 +- 1.4; 7.5	30.3 +- 3.1
18	175	4.8 39.0 +- 1.2; 5.9	27.1 +- 1.4; 7.5	30.8 +- 3.3
19	210	0.9 41.6 +- 1.2; 6.2	29.9 +- 1.5; 7.8	31.0 +- 3.0
20	200	2.9 39.1 +- 1.2; 5.9	27.2 +- 1.4; 7.5	30.7 +- 3.4
21	234	1.3 40.2 +- 1.2; 6.0	28.4 +- 1.5; 7.6	31.5 +- 3.0
22	216	3.3 39.3 +- 1.2; 5.9	27.4 +- 1.4; 7.5	28.7 +- 3.1
23	254	2.5 39.3 +- 1.2; 5.9	27.5 +- 1.4; 7.5	29.2 +- 3.1
24	244	3.8 40.1 +- 1.2; 6.0	28.3 +- 1.5; 7.6	29.3 +- 3.0
25	278	1.5 39.5 +- 1.2; 5.9	27.6 +- 1.4; 7.5	28.4 +- 2.8
26	263	5.4 39.9 +- 1.2; 6.0	28.1 +- 1.4; 7.6	29.7 +- 3.4
27	297	1.7 38.7 +- 1.2; 5.8	26.8 +- 1.4; 7.4	28.3 +- 3.1
28	284	5.6 40.0 +- 1.2; 6.0	28.1 +- 1.4; 7.6	29.3 +- 2.8
29	317	0.9 37.8 +- 1.1; 5.7	25.9 +- 1.4; 7.3	28.7 +- 3.1
30	305	4.2 35.8 +- 1.1; 5.4	23.7 +- 1.3; 7.1	27.1 +- 2.9
31	338	1.4 39.0 +- 1.2; 5.8	27.1 +- 1.4; 7.5	28.8 +- 3.1
32	330	5.0 36.5 +- 1.1; 5.5	24.4 +- 1.3; 7.1	26.3 +- 3.2
33	267	6.5 36.8 +- 1.1; 5.5	24.8 +- 1.4; 7.2	29.5 +- 3.5
34	130	3.7 37.6 +- 1.1; 5.6	25.6 +- 1.4; 7.3	29.1 +- 3.2
35	270	0.1 37.4 +- 1.1; 5.6	25.4 +- 1.4; 7.3	28.6 +- 3.3
38	345	6.7 40.0 +- 1.2; 6.0	28.2 +- 1.4; 7.6	30.6 +- 3.3
39	10	6.0 37.3 +- 1.1; 5.6	25.2 +- 1.4; 7.2	28.9 +- 3.4
40	63	6.0 38.1 +- 1.1; 5.7	26.2 +- 1.4; 7.4	28.7 +- 3.4
41	165	12.0 41.2 +- 1.2; 6.2	29.4 +- 1.5; 7.8	31.9 +- 2.8
42	248	13.0 44.9 +- 1.3; 6.7	33.4 +- 1.6; 8.3	33.4 +- 3.6
45	198	11.0 41.6 +- 1.2; 6.2	29.9 +- 1.5; 7.8	30.1 +- 3.1
46	39	16.0 37.7 +- 1.1; 5.7	25.7 +- 1.4; 7.3	27.9 +- 3.3
47	357	17.0 37.1 +- 1.1; 5.6	25.0 +- 1.4; 7.2	26.9 +- 3.2
48	171	18.0 40.5 +- 1.2; 6.1	28.7 +- 1.5; 7.7	30.5 +- 3.1
49	360	0.5 41.2 +- 1.2; 6.2	29.5 +- 1.5; 7.8	32.2 +- 3.1

Transit Dose = 13.7 +- 0.6; 3.8

FORT ST. VRAIN

For the period 930913-940202

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	27.6 +- 2.2	3
11.26 - 33.75 NNE	27.8 +- 0.5	2
33.76 - 56.25 NE	28.5 +- 2.9	3
56.26 - 78.75 ENE	28.5 +- 2.1	3
78.76 - 101.25 E	27.6 +- 0.2	2
101.26 - 123.75 ESE	30.1 +- 1.4	2
123.76 - 146.25 SE	27.8 +- 2.1	3
146.26 - 168.75 SSE	27.7 +- 1.5	3
168.76 - 191.25 S	27.3 +- 0.3	2
191.26 - 213.75 SSW	29.0 +- 1.5	3
213.76 - 236.25 SW	27.9 +- 0.7	2
236.26 - 258.75 WSW	29.7 +- 3.2	3
258.76 - 281.25 W	26.4 +- 1.6	4
281.26 - 303.75 WNW	27.4 +- 0.9	2
303.76 - 326.25 NW	24.8 +- 1.5	2
326.26 - 348.75 NNW	26.6 +- 1.9	3

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	27.9 +- 1.7	12
2 - 5	27.7 +- 1.9	19
> 5	27.9 +- 2.5	11
Upwind Control	27.7 +- 2.4	3

FORT ST. VRAIN
TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	8	0.8
2	2	3.3
3	29	2.6
4	17	5.4
5	54	2.1
6	48	4.8
7	76	2.6
8	58	4.2
9	100	1.5
10	87	4.5
11	118	1.6
12	104	3.0
13	143	1.6
14	128	4.5
15	168	2.3
16	148	4.6
17	182	0.8
18	175	4.8
19	210	0.9
20	200	2.9
21	234	1.3
22	216	3.3
23	254	2.5
24	244	3.8
25	278	1.5
26	263	5.4
27	297	1.7
28	284	5.6
29	317	0.9
30	305	4.2
31	338	1.4
32	330	5.0
33	267	6.5
34	130	3.7
35	270	0.1
38	345	6.7
39	10	6.0
40	63	6.0
41	165	12.0
42	248	13.0
45	198	11.0
46	39	16.0
47	357	17.0
48	171	18.0
49	360	0.5
		RD. 19
		0.7 MILES N. & 0.1 MILES E. OF REACTOR
		RD. 42
		RD. 23 & RD. 40
		RD. 46 & RD. 23
		FARM HOUSE ON RD. 38
		HWY. 60 & RD. 42
		RD. 25
		HWY. 60 & RD. 40
		RD. 23
		RD. 36 & RD. 29
		RD. 23
		RD. 34
		RD. 32 & RD. 21
		NILES MILLER DAIRY
		RD. 21 AT BEEMAN'S DITCH
		RD. 28
		RD. 34
		RD. 17
		RD. 34 & RD. 15
		RD. 13 & RD. 32
		RD. 17 & RD. 36
		RD. 34
		RD. 17 & RD. 36 1/2
		RD. 38
		RD. 36 1/2 & RD. 19
		RD. 13 & RD. 40
		RD. 19 & RD. 38
		RD. 44 & RD. 15
		MEAD ELEMENTARY SCHOOL
		PLATTEVILLE ELEMENTARY SCHOOL
		VISTOR'S CENTER AT PLANT
		LETFORD ELEMENTARY SCHOOL
		MILLIKEN MIDDLE SCHOOL
		GILCREST
		FT. LUPTON
		LONGMONT SCHOOL
		FREDERICK JR./SR. HIGH SCHOOL
		GREELEY ELECTRICAL SUBSTATION
		WINDSOR
		BRIGHTON

NRC TLD DOSES FOR FORT ST. VRAIN AREA

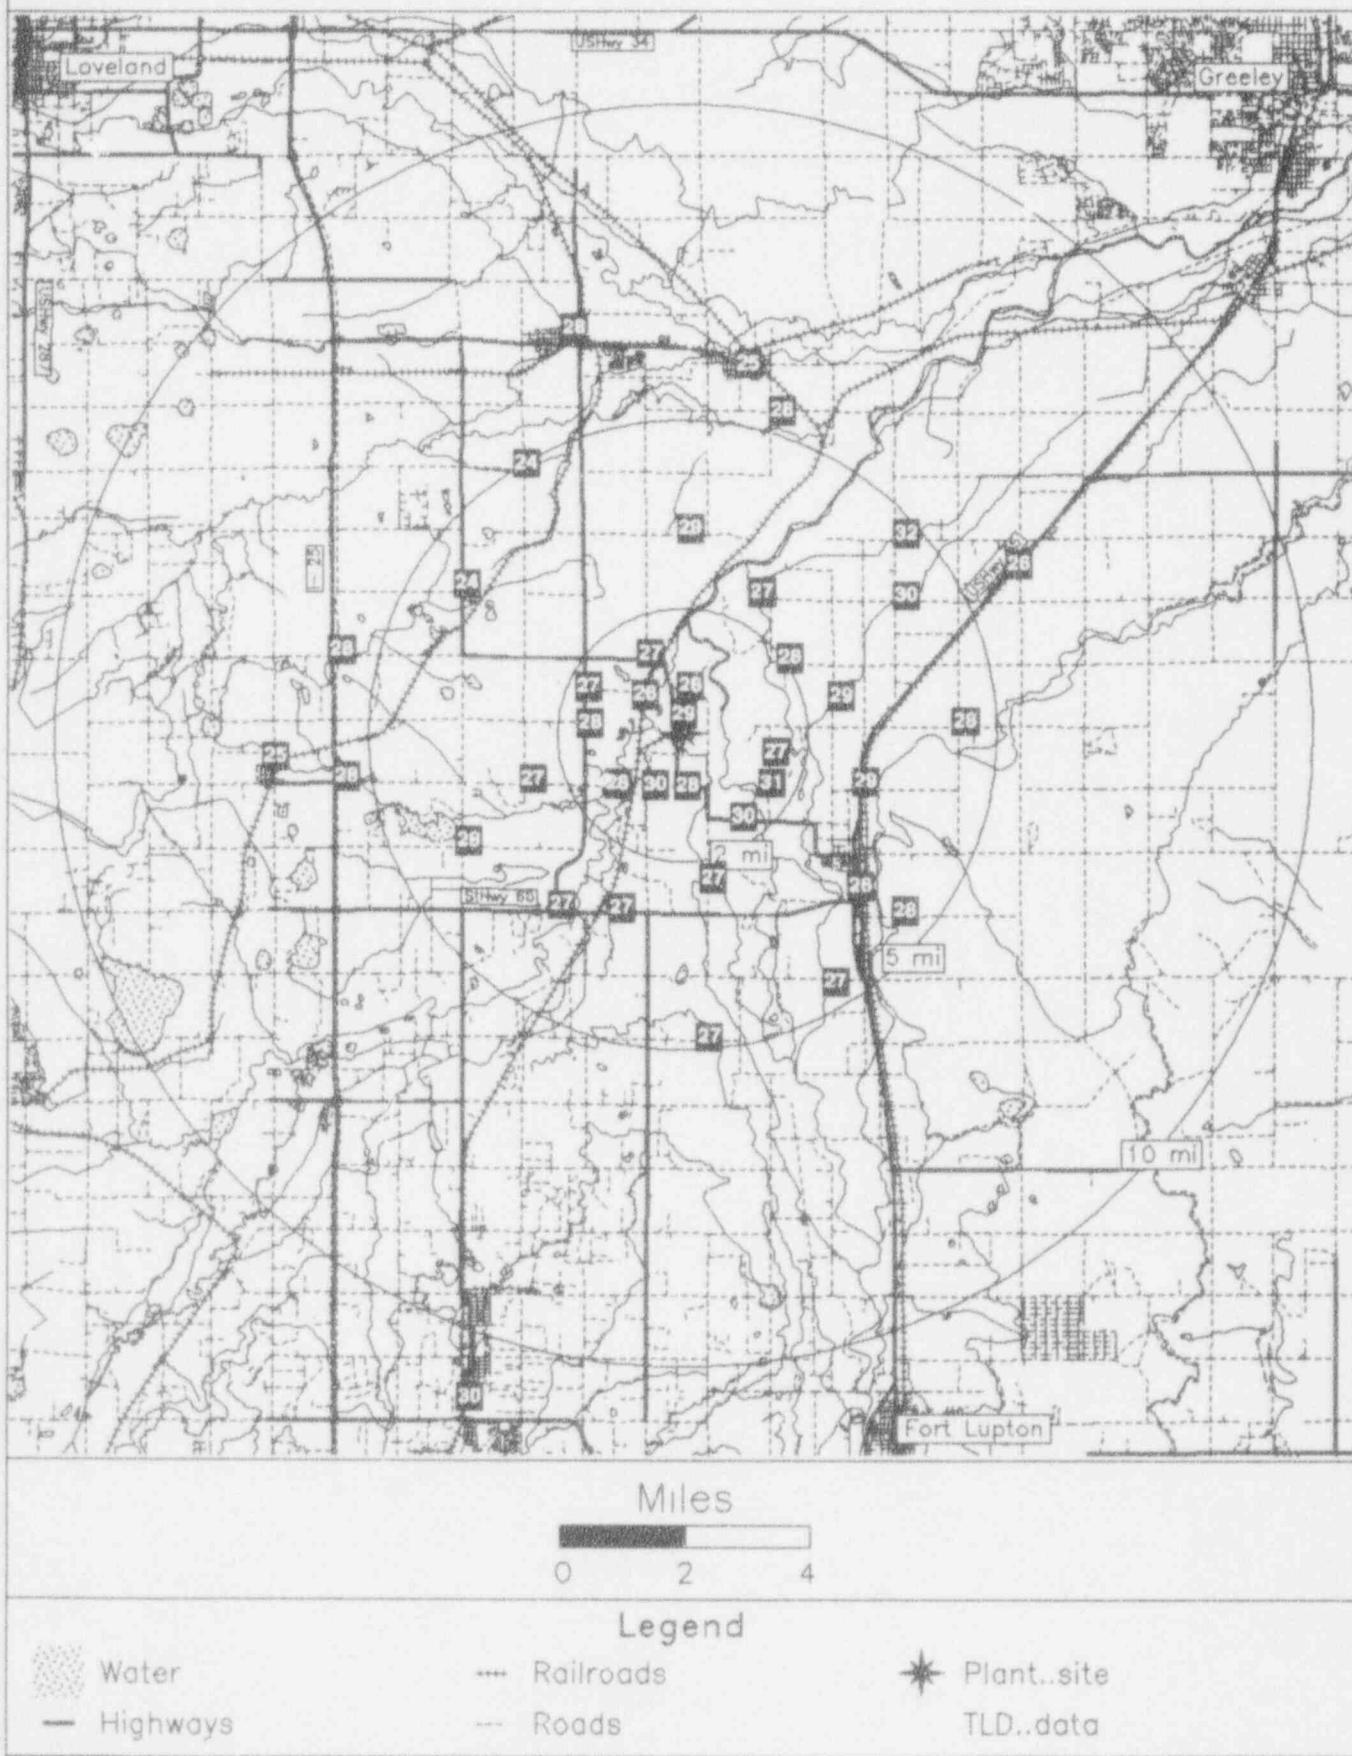

GINNA

TLD Direct Radiation Environmental Monitoring
 For the period 930915-940202 141 Days
 Field Time: 84 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	95	1.7	19.6 +- 0.6; 2.9	14.0 +- 0.8; 4.5
2	108	1.1	18.8 +- 0.6; 2.8	13.2 +- 0.7; 4.4
3	142	1.7	19.5 +- 0.6; 2.9	14.0 +- 0.8; 4.5
4	154	1.5	18.4 +- 0.6; 2.8	12.8 +- 0.7; 4.4
5	174	1.4	19.5 +- 0.6; 2.9	14.0 +- 0.8; 4.5
6	212	1.6	18.7 +- 0.6; 2.8	13.1 +- 0.7; 4.4
7	244	0.9	18.5 +- 0.6; 2.8	13.0 +- 0.7; 4.4
8	230	0.6	19.2 +- 0.6; 2.9	13.7 +- 0.8; 4.5
10	266	1.5	19.1 +- 0.6; 2.9	13.5 +- 0.7; 4.4
11	264	4.6	20.6 +- 0.6; 3.1	15.2 +- 0.8; 4.6
12	245	3.8	Missing Dosimeter	No Net Data
13	235	4.2	17.1 +- 0.5; 2.6	11.5 +- 0.7; 4.2
14	200	3.8	16.4 +- 0.5; 2.5	10.6 +- 0.7; 4.1
15	178	3.4	19.8 +- 0.6; 3.0	14.3 +- 0.8; 4.5
16	160	3.7	18.5 +- 0.6; 2.8	12.9 +- 0.7; 4.4
17	134	3.8	16.6 +- 0.5; 2.5	10.9 +- 0.7; 4.2
18	115	4.3	18.2 +- 0.5; 2.7	12.6 +- 0.7; 4.3
19	88	4.0	16.8 +- 0.5; 2.5	11.1 +- 0.7; 4.2
20	90	6.2	19.6 +- 0.6; 2.9	14.1 +- 0.8; 4.5
21	123	7.6	16.9 +- 0.5; 2.5	11.2 +- 0.7; 4.2
22	151	11.0	18.0 +- 0.5; 2.7	12.4 +- 0.7; 4.3
23	105	12.0	Missing Dosimeter	No Net Data
24	212	14.0	22.6 +- 0.7; 3.4	17.4 +- 0.8; 4.9
25	223	13.0	18.7 +- 0.6; 2.8	13.1 +- 0.7; 4.4
26	242	16.0	20.0 +- 0.6; 3.0	14.6 +- 0.8; 4.5
27	254	14.0	21.1 +- 0.6; 3.2	15.7 +- 0.8; 4.7
28	234	6.9	19.0 +- 0.6; 2.9	13.5 +- 0.7; 4.4
29	185	0.3	19.6 +- 0.6; 2.9	14.1 +- 0.8; 4.5
30	264	15.0	17.8 +- 0.5; 2.7	12.2 +- 0.7; 4.3

Transit Dose = 6.4 +- 0.4; 3.0

GINNA

For the period 930915-940202

TLD Direct Radiation Environmental Monitoring

Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	No Data +- No Data	0
11.26 - 33.75 NNE	No Data +- No Data	0
33.76 - 56.25 NE	No Data +- No Data	0
56.26 - 78.75 ENE	No Data +- No Data	0
78.76 - 101.25 E	13.1 +- 1.7	3
101.26 - 123.75 ESE	12.3 +- 1.0	3
123.76 - 146.25 SE	12.4 +- 2.2	2
146.26 - 168.75 SSE	12.7 +- 0.2	3
168.76 - 191.25 S	14.1 +- 0.2	3
191.26 - 213.75 SSW	13.7 +- 3.4	3
213.76 - 236.25 SW	12.9 +- 1.0	4
236.26 - 258.75 WSW	13.0 +- 0.0	1
258.76 - 281.25 W	14.4 +- 1.2	2
281.26 - 303.75 WNW	No Data +- No Data	0
303.76 - 326.25 NW	No Data +- No Data	0
326.26 - 348.75 NNW	No Data +- No Data	0


Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	13.5 +- 0.5	10
2 - 5	12.4 +- 1.7	8
> 5	13.6 +- 2.1	6
Upwind Control	14.1 +- 1.8	3

GINNA

TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	95	ONTARIO BOAT LAUNCH
2	108	LAKE RD. & KNICKERBOCKER RD.
3	142	KNICKERBOCKER RD. & BRICK CHURCH RD.
4	154	BRICK CHURCH RD.
5	174	ONTARIO CENTER RD. & BRICK CHURCH RD.
6	212	SLOCUM RD. & BRICK CHURCH RD.
7	244	LAKE RD. & SLOCUM RD.
8	230	LAKE RD.
10	266	EAGLE CLIFF FARM
11	264	LAKE RD. & SALT RD.
12	245	COUNTY LINE RD. & WOODWARD RD.
13	235	COUNTY LINE RD. & BERG RD.
14	200	RT. 104 (SUBSTATION #204)
15	178	RT. 104 (SUBSTATION #205)
16	160	RT. 104 & FURNACE RD.
17	134	FISHER RD & KENYON RD.
18	115	SEELY RD. & STONY LONESOME RD.
19	88	STONY LONESOME RD. & LAKE RD.
20	90	PULTNEYVILLE
21	123	WILLIAMSON
22	151	MARION
23	105	SODUS
24	212	FAIRPORT
25	223	PENFIELD
26	242	ROCHESTER MUSEUM
27	254	IRONDEQUIDIT TOWN HALL
28	234	WEBSTER
29	185	FARM IN FRONT OF PLANT
30	264	ROCHESTER

NRC TLD DOSES FOR GINNA AREA

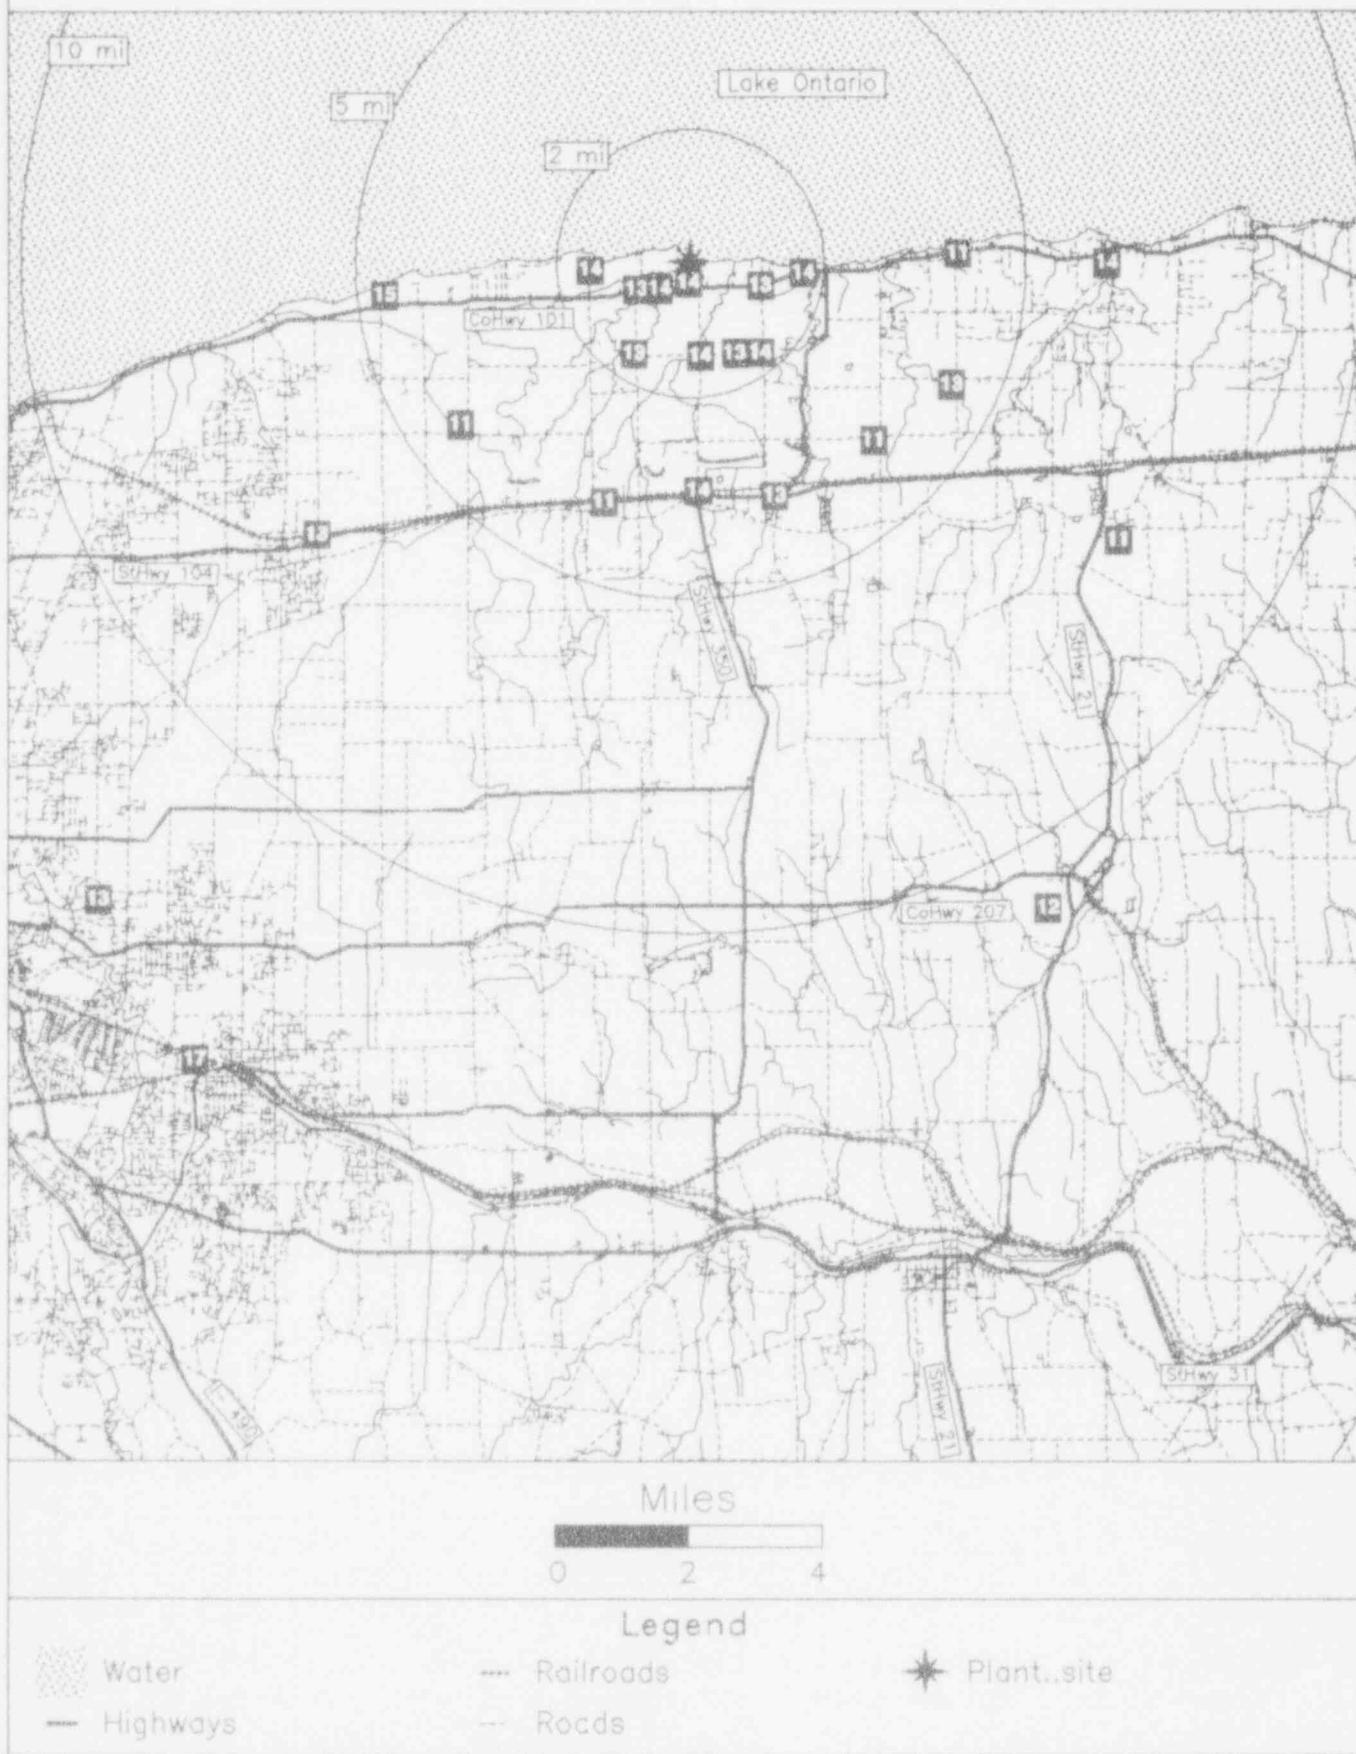

GRAND GULF

TLD Direct Radiation Environmental Monitoring
 For the period 930915-940201 140 Days
 Field Time: 99 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	337	2.0	20.2 +- 0.6; 3.0	14.6 +- 0.6; 4.0
2	351	1.6	20.7 +- 0.6; 3.1	15.1 +- 0.7; 4.1
3	20	1.5	22.8 +- 0.7; 3.4	17.0 +- 0.7; 4.3
4	51	2.3	22.9 +- 0.7; 3.4	17.1 +- 0.7; 4.3
5	68	2.7	23.1 +- 0.7; 3.5	17.3 +- 0.7; 4.3
6	47	4.1	20.9 +- 0.6; 3.1	15.3 +- 0.7; 4.1
7	68	4.9	24.5 +- 0.7; 3.7	18.6 +- 0.7; 4.4
8	91	3.2	25.3 +- 0.8; 3.8	19.3 +- 0.8; 4.5
9	81	1.0	23.9 +- 0.7; 3.6	18.0 +- 0.7; 4.4
10	109	0.6	24.7 +- 0.7; 3.7	18.7 +- 0.8; 4.5
11	139	0.8	25.7 +- 0.8; 3.9	19.7 +- 0.8; 4.6
12	185	1.6	23.6 +- 0.7; 3.5	17.7 +- 0.7; 4.3
13	207	1.9	25.6 +- 0.8; 3.8	19.6 +- 0.8; 4.6
14	247	1.5	22.2 +- 0.7; 3.3	16.5 +- 0.7; 4.2
15	130	4.2	23.4 +- 0.7; 3.5	17.5 +- 0.7; 4.3
16	122	4.8	24.5 +- 0.7; 3.7	18.5 +- 0.7; 4.4
17	135	5.3	23.1 +- 0.7; 3.5	17.2 +- 0.7; 4.3
18	147	4.3	21.5 +- 0.6; 3.2	15.9 +- 0.7; 4.1
19	224	6.8	Missing Dosimeter	No Net Data
20	172	3.6	21.1 +- 0.6; 3.2	15.5 +- 0.7; 4.1
21	291	12.0	22.7 +- 0.7; 3.4	17.0 +- 0.7; 4.3
22	332	8.0	23.7 +- 0.7; 3.6	17.8 +- 0.7; 4.4
23	310	7.9	18.3 +- 0.5; 2.7	12.9 +- 0.6; 3.8
24	281	7.0	21.9 +- 0.7; 3.3	16.2 +- 0.7; 4.2
25	291	4.8	24.4 +- 0.7; 3.7	18.5 +- 0.7; 4.4
26	248	9.5	22.1 +- 0.7; 3.3	16.4 +- 0.7; 4.2
27	239	13.0	21.2 +- 0.6; 3.2	15.5 +- 0.7; 4.1
29	90	0.9	23.9 +- 0.7; 3.6	18.0 +- 0.7; 4.4
30	67	51.0	17.6 +- 0.5; 2.6	12.3 +- 0.6; 3.8
31	67	51.0	18.9 +- 0.6; 2.8	13.4 +- 0.6; 3.9
32	67	51.0	18.7 +- 0.6; 2.8	13.3 +- 0.6; 3.9
33	206	4.8	24.4 +- 0.7; 3.7	18.5 +- 0.7; 4.4

Transit Dose = 4.1 +- 0.4; 3.2

GRAND GULF

For the period 930915-940201

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	15.1 +- 0.0	1
11.26 - 33.75 NNE	17.0 +- 0.0	1
33.76 - 56.25 NE	16.2 +- 1.3	2
56.26 - 78.75 ENE	17.9 +- 0.9	2
78.76 - 101.25 E	18.4 +- 0.7	3
101.26 - 123.75 ESE	18.6 +- 0.1	2
123.76 - 146.25 SE	18.1 +- 1.3	3
146.26 - 168.75 SSE	15.9 +- 0.0	1
168.76 - 191.25 S	16.6 +- 1.6	2
191.26 - 213.75 SSW	19.0 +- 0.8	2
213.76 - 236.25 SW	No Data +- No Data	0
236.26 - 258.75 WSW	16.1 +- 0.5	3
258.76 - 281.25 W	16.2 +- 0.0	1
281.26 - 303.75 WNW	17.7 +- 1.1	2
303.76 - 326.25 NW	12.9 +- 0.0	1
326.26 - 348.75 NNW	16.2 +- 2.3	2

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	17.5 +- 1.7	10
2 - 5	17.4 +- 1.4	11
> 5	16.1 +- 1.6	7
Upwind Control	13.0 +- 0.6	3

GRAND GULF
TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	337	FT. COBUN
2	351	GRAND GULF ST. PARK
3	20	EVAC. SIGN E. OF GRAND GULF
4	51	E. OF STATION 3
5	68	UNDERGROUND CABLE SIGN
6	47	N. OF YMCA CAMP
7	68	BONNER BEAUTY SHOP
8	91	LAKE CLAIBORNE
9	81	W. OF SPRING HILL BAPTIST CHURCH
10	109	NEAR ROAD BED SIGN ESE OF PLANT
11	139	OPEN FIELD SE OF PLANT
12	185	S. OF PLANT
13	207	UNDERGROUND CABLE SIGN
14	247	WSW OF PLANT BY MISS. RIVER
15	130	A.W. WATSON JR. HIGH SCHOOL
16	122	PORT GIBSON SUBSTATION
17	135	VINE ST.
18	147	CENTERS CR.
19	224	WINDSOR RUINS
20	172	NEAR MISS. AIR SAMPLING STATION
21	291	NEWELLTON
22	332	TOP OF LEVY
23	310	YUCATAN HUNTING CLUB
24	281	LAKE ST. JOSEPH
25	291	WINTER QUARTERS
26	248	LAKE BRUIN STATE PARK
27	239	ST. JOSEPH
29	90	MAGIE JACKSON TRAILER
30	67	JACKSON (MISSISSIPPI)
31	67	JACKSON (MISSISSIPPI)
32	67	JACKSON (MISSISSIPPI)
33	206	EAST OF WINDSOR RUINS

NRC TLD DOSES FOR GRAND GULF AREA

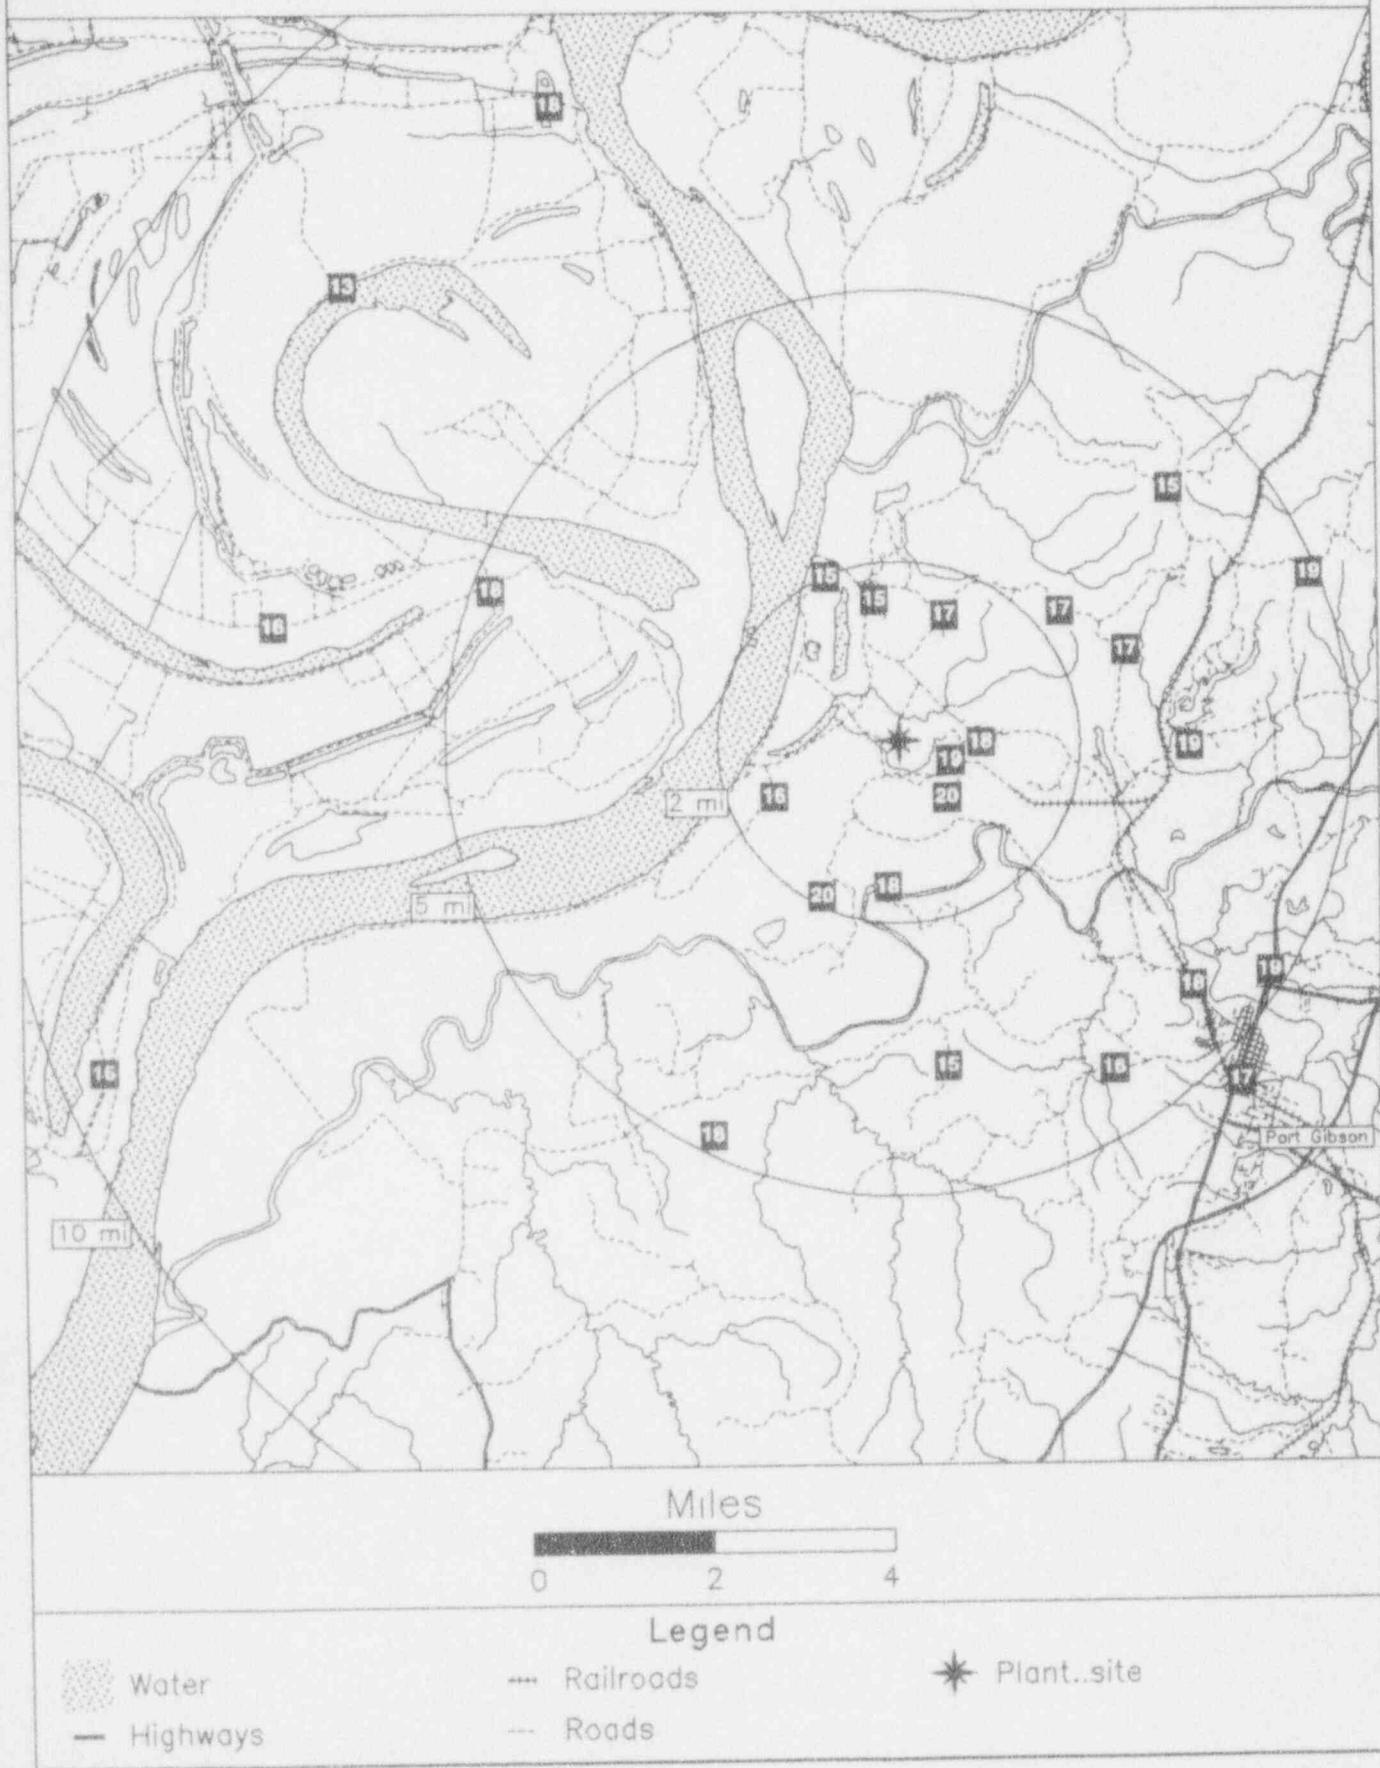

HADDAM NECK

TLD Direct Radiation Environmental Monitoring
 For the period 930915-940201 140 Days
 Field Time: 94 Days

NRC Sta	Location	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
2	17	2.6	24.4 +- 0.7; 3.7	19.4 +- 0.8; 4.6
3	45	1.9	24.2 +- 0.7; 3.6	19.2 +- 0.8; 4.5
4	67	2.3	23.7 +- 0.7; 3.5	18.7 +- 0.8; 4.5
5	93	1.6	22.2 +- 0.7; 3.3	17.3 +- 0.7; 4.3
6	115	2.3	20.9 +- 0.6; 3.1	16.1 +- 0.7; 4.2
7	143	1.9	22.7 +- 0.7; 3.4	17.8 +- 0.7; 4.4
8	165	0.9	21.9 +- 0.7; 3.3	17.0 +- 0.7; 4.3
9	174	1.3	23.9 +- 0.7; 3.6	19.0 +- 0.8; 4.5
10	195	0.7	21.3 +- 0.6; 3.2	16.4 +- 0.7; 4.2
12	241	0.8	22.9 +- 0.7; 3.4	17.9 +- 0.7; 4.4
13	263	0.8	21.2 +- 0.6; 3.2	16.3 +- 0.7; 4.2
14	290	1.9	23.2 +- 0.7; 3.5	18.2 +- 0.7; 4.4
15	311	1.5	21.0 +- 0.6; 3.1	16.1 +- 0.7; 4.2
16	341	1.3	Missing Dosimeter	No Net Data
17	360	2.3	24.5 +- 0.7; 3.7	19.5 +- 0.8; 4.6
18	222	2.5	21.7 +- 0.7; 3.3	16.9 +- 0.7; 4.3
19	269	3.0	20.5 +- 0.6; 3.1	15.7 +- 0.7; 4.2
20	66	3.2	21.4 +- 0.6; 3.2	16.6 +- 0.7; 4.3
21	91	2.8	22.5 +- 0.7; 3.4	17.6 +- 0.7; 4.4
22	112	3.2	22.8 +- 0.7; 3.4	17.9 +- 0.7; 4.4
23	137	2.9	21.4 +- 0.6; 3.2	16.6 +- 0.7; 4.3
24	155	7.1	19.6 +- 0.6; 2.9	14.8 +- 0.7; 4.1
25	175	5.7	21.6 +- 0.6; 3.2	16.7 +- 0.7; 4.3
26	196	2.5	20.1 +- 0.6; 3.0	15.3 +- 0.7; 4.1
27	225	1.1	21.8 +- 0.7; 3.3	16.9 +- 0.7; 4.3
28	250	3.5	21.1 +- 0.6; 3.2	16.2 +- 0.7; 4.2
29	340	20.0	23.9 +- 0.7; 3.6	18.9 +- 0.8; 4.5
30	286	3.2	21.5 +- 0.6; 3.2	16.6 +- 0.7; 4.3
31	322	2.7	21.5 +- 0.6; 3.2	16.6 +- 0.7; 4.3
32	327	2.9	24.9 +- 0.7; 3.7	19.8 +- 0.8; 4.6
33	359	6.4	21.1 +- 0.6; 3.2	16.2 +- 0.7; 4.2
35	54	10.0	21.9 +- 0.7; 3.3	17.0 +- 0.7; 4.3
36	72	8.8	24.4 +- 0.7; 3.7	19.4 +- 0.8; 4.6
37	149	6.8	20.3 +- 0.6; 3.1	15.5 +- 0.7; 4.1
38	158	5.9	19.3 +- 0.6; 2.9	14.5 +- 0.7; 4.0
39	267	8.8	20.8 +- 0.6; 3.1	15.9 +- 0.7; 4.2
40	303	9.1	22.3 +- 0.7; 3.3	17.4 +- 0.7; 4.3
41	313	9.6	22.2 +- 0.7; 3.3	17.3 +- 0.7; 4.3
42	320	13.0	23.2 +- 0.7; 3.5	18.3 +- 0.7; 4.4
43	324	18.0	20.8 +- 0.6; 3.1	16.0 +- 0.7; 4.2
44	328	15.0	22.8 +- 0.7; 3.4	17.8 +- 0.7; 4.4
45	343	18.0	24.0 +- 0.7; 3.6	19.1 +- 0.8; 4.5
46	144	5.0	23.5 +- 0.7; 3.5	18.5 +- 0.8; 4.5
49	340	20.0	22.8 +- 0.7; 3.4	17.9 +- 0.7; 4.4

Transit Dose = 4.2 +- 0.4; 3.1

HADDAM NECK

For the period 930915-940201

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	17.9 +- 2.3	2
11.26 - 33.75 NNE	19.4 +- 0.0	1
33.76 - 56.25 NE	18.1 +- 1.5	2
56.26 - 78.75 ENE	18.2 +- 1.5	3
78.76 - 101.25 E	17.4 +- 0.2	2
101.26 - 123.75 ESE	17.0 +- 1.3	2
123.76 - 146.25 SE	17.6 +- 1.0	3
146.26 - 168.75 SSE	15.5 +- 1.1	4
168.76 - 191.25 S	17.8 +- 1.6	2
191.26 - 213.75 SSW	15.9 +- 0.8	2
213.76 - 236.25 SW	16.9 +- 0.1	2
236.26 - 258.75 WSW	17.1 +- 1.2	2
258.76 - 281.25 W	16.0 +- 0.3	3
281.26 - 303.75 WNW	17.4 +- 0.8	3
303.76 - 326.25 NW	16.9 +- 1.0	5
326.26 - 348.75 NNW	18.9 +- 0.8	4

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	17.5 +- 1.0	11
2 - 5	17.4 +- 1.4	16
> 5	17.0 +- 1.5	15
Upwind Control	17.9 +- 0.0	1

HADDAM NECK
TLD Direct Radiation Environmental Monitoring

NRC Station	Location	Azimuth / Distance	Description
		Degree / Mile	
2	LEESVILLE SUBSTA.	17	2.6
3	FRANK DAVIS RESORT	45	1.9
4	RT. 149 & RT. 151	67	2.3
5	STATE RT. 149	93	1.6
6	ON MORTIMER GELSTON FARM	115	2.3
7	SUBSTA. ON RT. 9A	143	1.9
8	PLAINS ROAD	165	0.9
9	PLAINS ROAD	174	1.3
10	MIDDLESEX EXT. CENTER	195	0.7
12	JAIL HILL ROAD	241	0.8
13	WALKLEY HILL RD. & RT. 9A	263	0.8
14	WALKLEY HILL ROAD	290	1.9
15	ROCK LANDING	311	1.5
16	UPPER ROAD	341	1.3
17	PINE BROOK	360	2.3
18	BEAVER MEADOW ROAD	222	2.5
19	SKINNER ROAD	269	3.0
20	EAST HADDAM PUBLIC LIBRARY	66	3.2
21	ORCHARD ST.	91	2.8
22	SUBSTA. ON RT. 151	112	3.2
23	GOODSPEED OPERA HOUSE	137	2.9
24	MONSANTO PLANT	155	7.1
25	CHESTER(RT.148)	175	5.7
26	TURKEY HILL ROAD	196	2.5
27	JAIL HILL ROAD	225	1.1
28	HADDAM JR. HIGH	250	3.5
29	CONN.STATE(SECURITY)	340	20.0
30	CL&P SUBSTA. (HIGGANUM)	286	3.2
31	CLARKHURST ROAD	322	2.7
32	HURD PARK ROAD	327	2.9
33	EAST HAMPTON FIRE DEPT.	359	6.4
35	COLCHESTER STATE POLICE	54	10.0
36	LAKE HAYWOOD AREA	72	8.8
37	ST.JOHN'S SCHOOL	149	6.8
38	CHESTER FIRE CO.	158	5.9
39	COGINCHAUG HIGH SCH.	267	8.8
40	OLD GAS WORKS	303	9.1
41	U.S. POST OFFICE	313	9.6
44	CROMWELL FIRE CO.	320	13.0
43	NEWINGTON CHILDREN'S HOSP.	324	18.0
44	ROCKY HILL FIRE STA.	328	15.0
45	WETHERSFIELD(CONN)	343	18.0
46	FOUNDER SCHOOL	144	5.0
49	CONN. STATE CAPITOL	340	20.0

NRC TLD DOSES FOR HADDAM NECK AREA

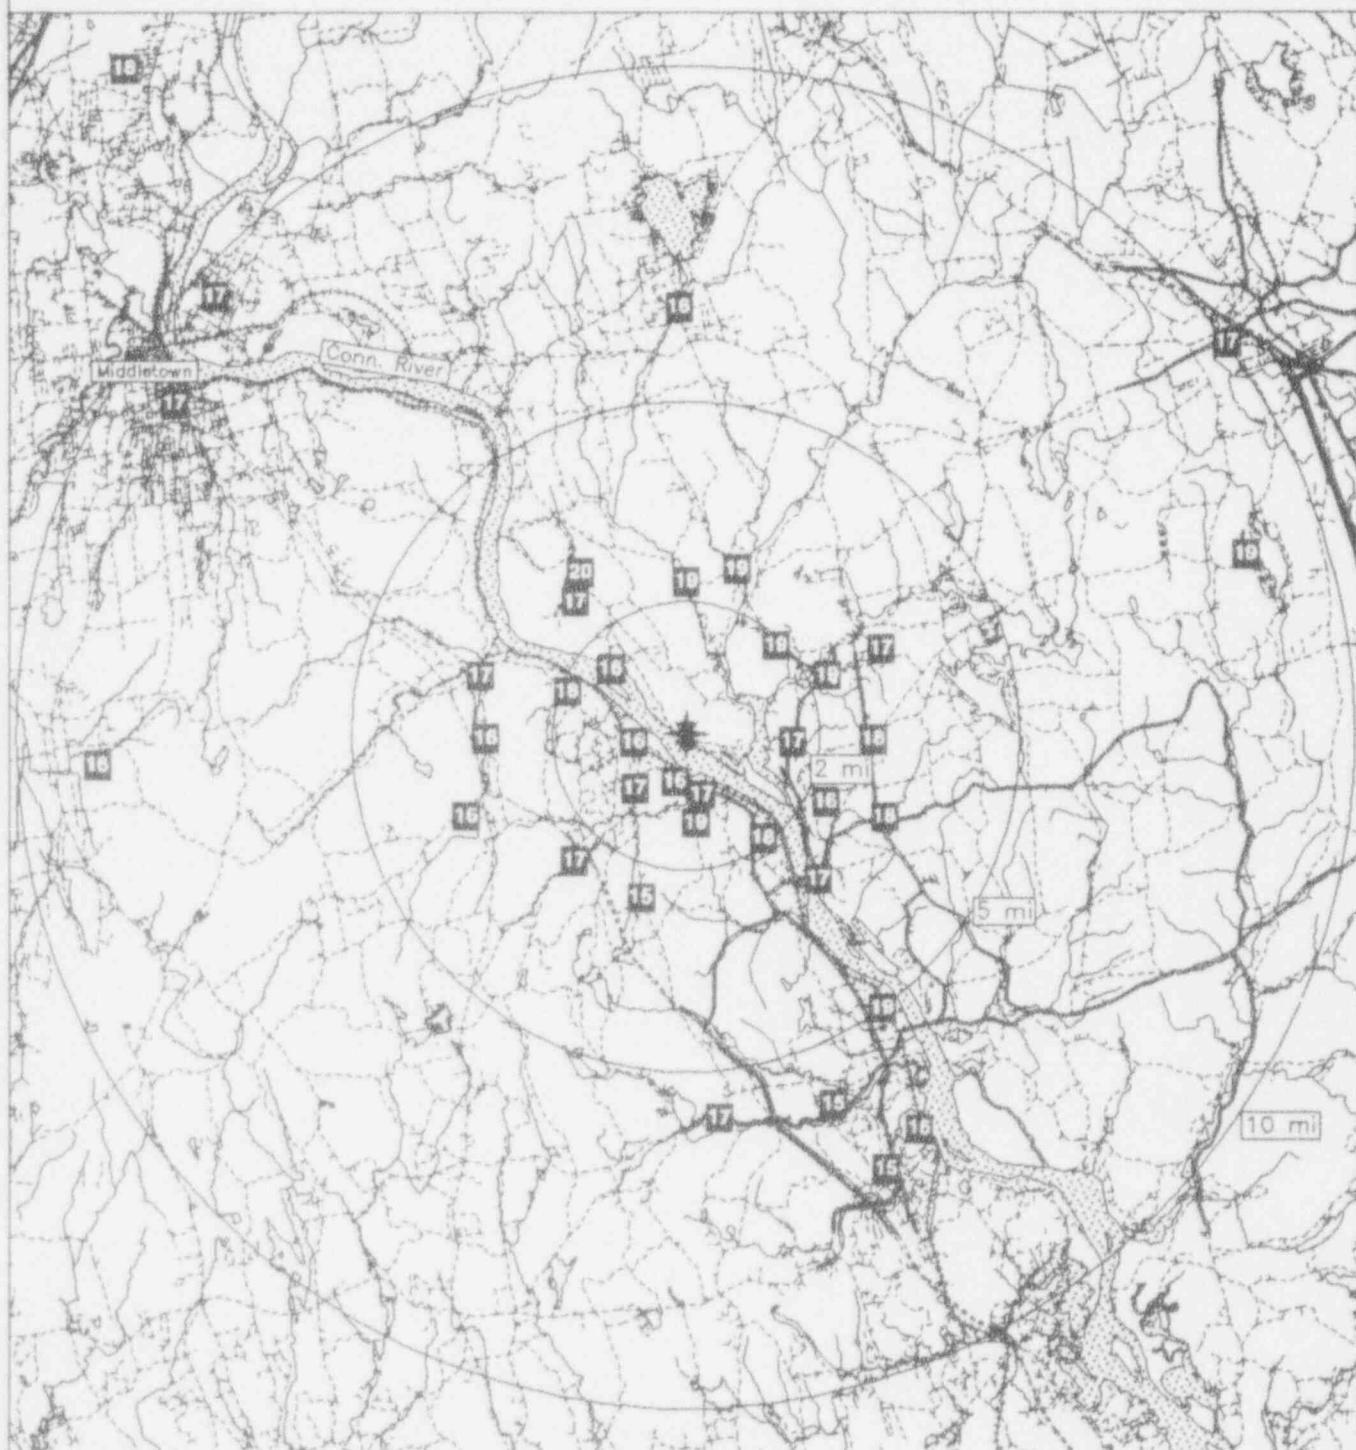

Miles

A horizontal scale bar with tick marks at 0, 2, and 4 miles.

Legend

Water
— Highways

... Railroads
— Roads

* Plant..site

HARRIS

TLD Direct Radiation Environmental Monitoring
 For the period 930915-940203 142 Days
 Field Time: 99 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.			Hist. Range Net Exp Rate +-1 Std Dev		
1	36	2.6	22.2	+- 0.7;	3.3	16.1	+- 0.7; 4.2	
2	25	3.2	18.6	+- 0.6;	2.8	12.9	+- 0.6; 3.9	
3	5	2.5	20.9	+- 0.6;	3.1	14.9	+- 0.7; 4.1	
4	27	1.5	19.5	+- 0.6;	2.9	13.7	+- 0.6; 4.0	
5	36	0.9	18.2	+- 0.5;	2.7	12.5	+- 0.6; 3.8	
6	68	0.8	17.4	+- 0.5;	2.6	11.8	+- 0.6; 3.8	
7	98	0.7	19.5	+- 0.6;	2.9	13.7	+- 0.6; 4.0	
8	232	0.7	17.8	+- 0.5;	2.7	12.1	+- 0.6; 3.8	
9	190	0.8	16.8	+- 0.5;	2.5	11.2	+- 0.6; 3.7	
10	158	0.7	17.6	+- 0.5;	2.6	11.9	+- 0.6; 3.8	
11	42	4.7	24.7	+- 0.7;	3.7	18.4	+- 0.8; 4.5	
12	40	8.6	21.1	+- 0.6;	3.2	15.2	+- 0.7; 4.1	
13	298	13.0	17.6	+- 0.5;	2.6	11.9	+- 0.6; 3.8	
14	298	12.0	17.7	+- 0.5;	2.7	12.0	+- 0.6; 3.8	
15	298	11.0	17.3	+- 0.5;	2.6	11.7	+- 0.6; 3.8	
16	332	4.8	20.0	+- 0.6;	3.0	14.2	+- 0.6; 4.0	
17	291	4.5	16.4	+- 0.5;	2.5	10.9	+- 0.6; 3.7	
18	270	5.1	16.9	+- 0.5;	2.5	11.3	+- 0.6; 3.7	
19	240	5.1	20.5	+- 0.6;	3.1	14.6	+- 0.7; 4.1	
20	227	4.8	16.8	+- 0.5;	2.5	11.2	+- 0.6; 3.7	
21	208	4.8	16.4	+- 0.5;	2.5	10.8	+- 0.6; 3.7	
22	190	4.6	18.5	+- 0.6;	2.8	12.8	+- 0.6; 3.9	
23	151	4.8	19.5	+- 0.6;	2.9	13.7	+- 0.6; 4.0	
24	132	4.7	17.4	+- 0.5;	2.6	11.8	+- 0.6; 3.8	
25	112	5.0	20.1	+- 0.6;	3.0	14.2	+- 0.6; 4.0	
26	92	4.6	16.6	+- 0.5;	2.5	11.0	+- 0.6; 3.7	
27	115	2.8	Damaged Dosimeter			No Net Data	14.5	+- 2.4
28	135	2.3	14.1	+- 0.4;	2.1	8.7	+- 0.5; 3.5	
29	164	2.2	17.6	+- 0.5;	2.6	12.0	+- 0.6; 3.8	
30	49	2.2	17.6	+- 0.5;	2.6	11.9	+- 0.6; 3.8	
31	276	1.8	17.4	+- 0.5;	2.6	11.8	+- 0.6; 3.8	
32	292	1.7	21.4	+- 0.6;	3.2	15.4	+- 0.7; 4.1	
33	314	1.4	19.8	+- 0.6;	3.0	13.9	+- 0.6; 4.0	
34	329	1.3	22.1	+- 0.7;	3.3	16.1	+- 0.7; 4.2	
35	350	4.5	19.1	+- 0.6;	2.9	13.3	+- 0.6; 3.9	
36	338	4.4	17.8	+- 0.5;	2.7	12.1	+- 0.6; 3.8	
37	16	4.9	18.4	+- 0.6;	2.8	12.7	+- 0.6; 3.9	
38	68	4.8	16.6	+- 0.5;	2.5	11.0	+- 0.6; 3.7	
39	80	6.9	18.6	+- 0.6;	2.8	12.9	+- 0.6; 3.9	
40	80	6.9	Damaged Dosimeter			No Net Data	14.3	+- 2.2
41	118	9.7	23.2	+- 0.7;	3.5	17.1	+- 0.7; 4.3	
42	260	1.1	17.7	+- 0.5;	2.7	12.0	+- 0.6; 3.8	
43	333	1.7	20.1	+- 0.6;	3.0	14.2	+- 0.6; 4.0	
44	50	24.0	24.1	+- 0.7;	3.6	17.9	+- 0.7; 4.4	

Transit Dose = 4.5 +- 0.4; 3.2

HARRIS
For the period 930915-940203

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number in Group
348.76 - 11.25 N	14.1 +- 1.2	2
11.26 - 33.75 NNE	13.1 +- 0.5	3
33.76 - 56.25 NE	15.3 +- 2.7	6
56.26 - 78.75 ENE	11.4 +- 0.5	2
78.76 - 101.25 E	12.5 +- 1.3	3
101.26 - 123.75 ESE	15.6 +- 2.0	2
123.76 - 146.25 SE	10.3 +- 2.1	2
146.26 - 168.75 SSE	12.5 +- 1.0	3
168.76 - 191.25 S	12.0 +- 1.1	2
191.26 - 213.75 SSW	10.8 +- 0.0	1
213.76 - 236.25 SW	11.7 +- 0.6	2
236.26 - 258.75 WSW	14.6 +- 0.0	1
258.76 - 281.25 W	11.7 +- 0.4	3
281.26 - 303.75 WNW	13.1 +- 3.2	2
303.76 - 326.25 NW	13.9 +- 0.0	1
326.26 - 348.75 NNW	14.2 +- 1.6	4

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	13.1 +- 1.5	13
2 - 5	12.7 +- 2.1	20
> 5	14.8 +- 2.5	6
Upwind Control	11.9 +- 0.2	3


HARRIS
TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	36	2.6
2	25	3.2
3	5	2.5
4	27	1.5
5	36	0.9
6	68	0.8
7	98	0.7
8	232	0.7
9	190	0.8
10	158	0.7
11	42	4.7
12	40	8.6
13	298	13.0
14	298	12.0
15	298	11.0
16	332	4.8
17	291	4.5
18	270	5.1
19	240	5.1
20	227	4.8
21	208	4.8
22	190	4.6
23	151	4.8
24	132	4.7
25	112	5.0
26	92	4.6
27	115	2.8
28	135	2.3
29	164	2.2
30	49	2.2
31	276	1.8
32	292	1.7
33	314	1.4
34	329	1.3
35	350	4.5
36	338	4.4
37	16	4.9
38	68	4.8
39	80	6.9
40	80	6.9
41	118	9.7
42	260	1.1
43	333	1.7
44	50	24.0

NRC TLD DOSES FOR HARRIS AREA

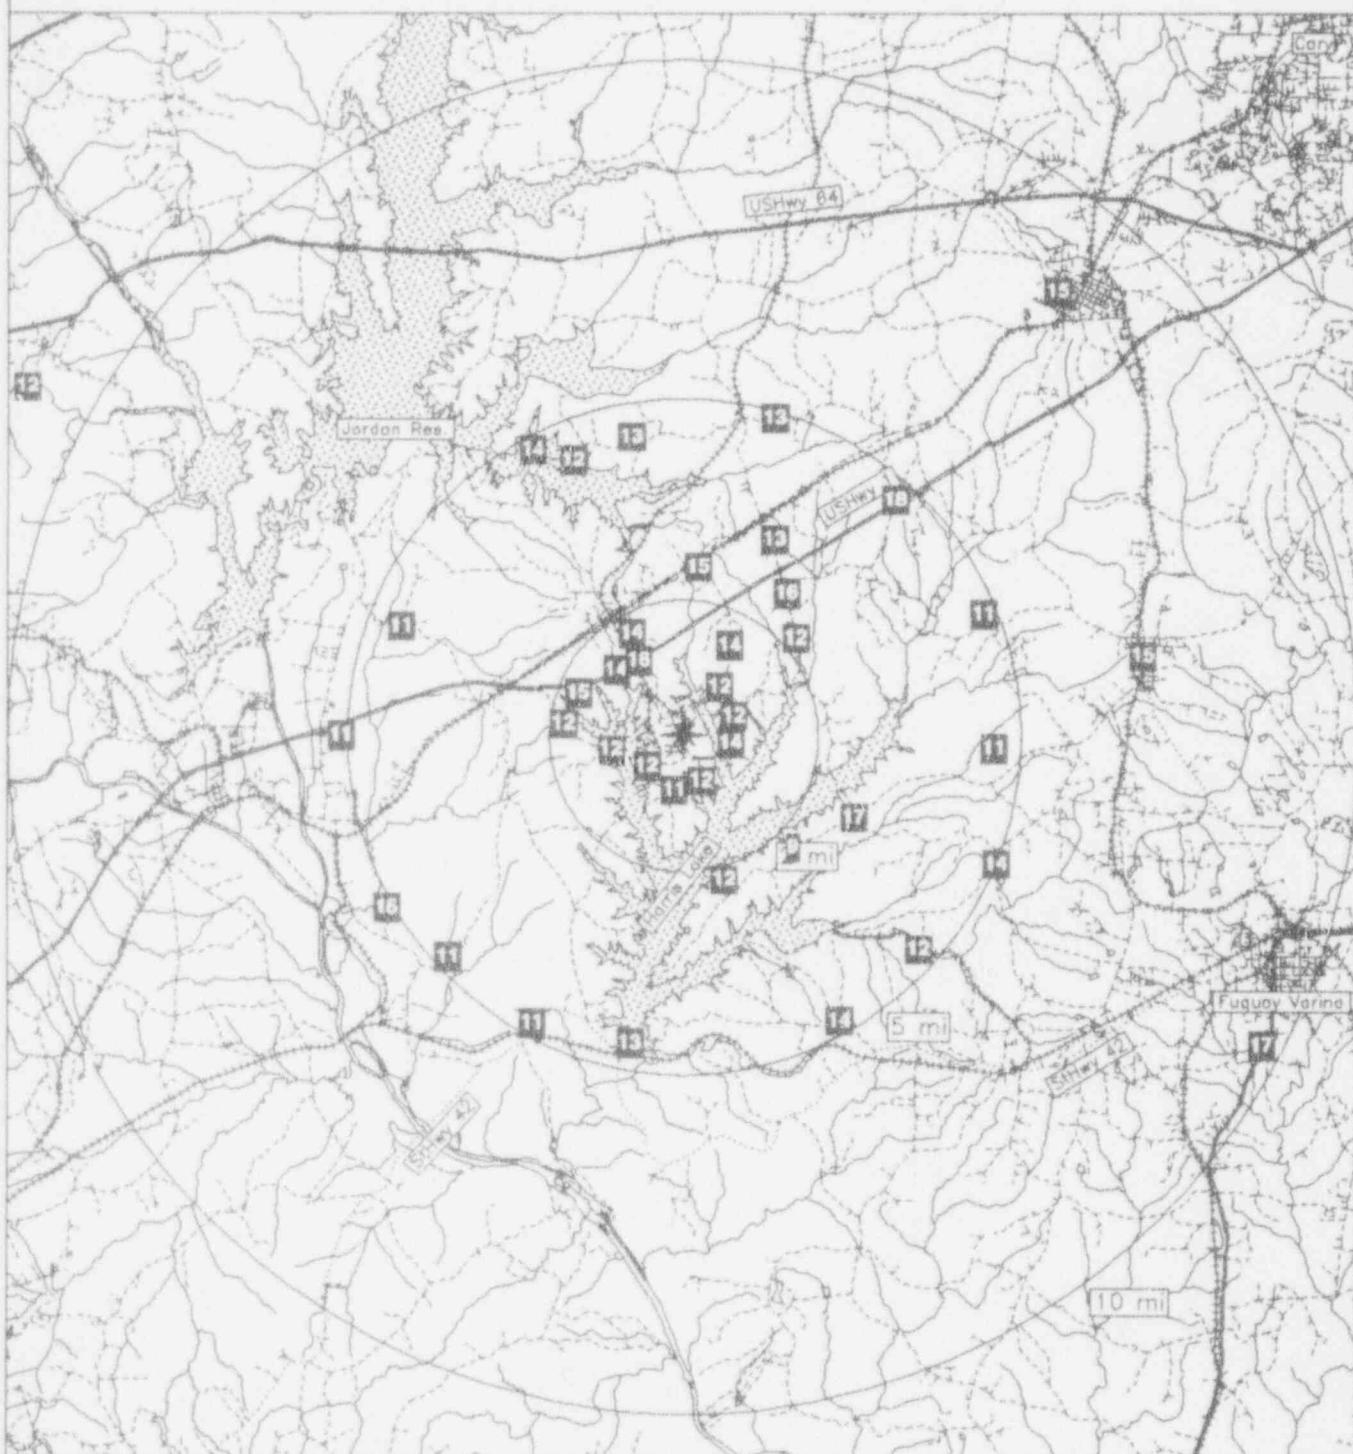

Miles



Legend

Water

Highways

Railroads

Roads

Plant..site

HATCH

TLD Direct Radiation Environmental Monitoring
 For the period 930914-940209 149 Days
 Field Time: 100 Days

NRC Sta	Location	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	342	23.0	24.0 +- 0.7; 3.6	15.6 +- 0.8; 4.5
2	359	7.7	22.4 +- 0.7; 3.4	14.2 +- 0.7; 4.3
3	354	4.5	21.6 +- 0.6; 3.2	13.5 +- 0.7; 4.3
4	336	2.9	20.6 +- 0.6; 3.1	12.6 +- 0.7; 4.2
5	309	4.6	20.6 +- 0.6; 3.1	12.6 +- 0.7; 4.2
6	297	5.6	23.2 +- 0.7; 3.5	14.9 +- 0.7; 4.4
7	24	2.8	21.3 +- 0.6; 3.2	13.2 +- 0.7; 4.2
8	49	2.0	21.2 +- 0.6; 3.2	13.2 +- 0.7; 4.2
9	49	10.0	20.8 +- 0.6; 3.1	12.8 +- 0.7; 4.2
10	28	4.8	21.0 +- 0.6; 3.1	12.9 +- 0.7; 4.2
11	67	5.0	22.0 +- 0.7; 3.3	13.8 +- 0.7; 4.3
12	50	5.1	26.0 +- 0.8; 3.9	17.4 +- 0.8; 4.7
13	353	2.0	20.4 +- 0.6; 3.1	12.4 +- 0.7; 4.2
14	341	1.6	21.7 +- 0.7; 3.3	13.6 +- 0.7; 4.3
15	147	10.0	19.7 +- 0.6; 3.0	11.8 +- 0.7; 4.1
16	232	0.9	19.0 +- 0.6; 2.8	11.1 +- 0.7; 4.0
17	205	1.6	21.3 +- 0.6; 3.2	13.2 +- 0.7; 4.2
18	192	4.2	17.2 +- 0.5; 2.6	9.5 +- 0.6; 3.9
19	184	4.2	18.2 +- 0.5; 2.7	10.5 +- 0.6; 4.0
20	165	4.6	20.1 +- 0.6; 3.0	12.1 +- 0.7; 4.1
21	135	4.4	19.8 +- 0.6; 3.0	11.9 +- 0.7; 4.1
22	120	4.1	19.8 +- 0.6; 3.0	11.9 +- 0.7; 4.1
23	107	3.7	19.3 +- 0.6; 2.9	11.4 +- 0.7; 4.1
24	123	14.0	19.3 +- 0.6; 2.9	11.4 +- 0.7; 4.1
25	114	12.0	20.9 +- 0.6; 3.1	12.8 +- 0.7; 4.2
26	142	1.8	21.5 +- 0.6; 3.2	13.4 +- 0.7; 4.3
27	157	2.2	20.5 +- 0.6; 3.1	12.5 +- 0.7; 4.2
28	171	0.9	21.3 +- 0.6; 3.2	13.2 +- 0.7; 4.2
29	253	1.0	20.5 +- 0.6; 3.1	12.4 +- 0.7; 4.2
30	270	1.0	22.4 +- 0.7; 3.4	14.2 +- 0.7; 4.3
31	292	1.1	20.7 +- 0.6; 3.1	12.6 +- 0.7; 4.2
32	268	4.2	20.2 +- 0.6; 3.0	12.2 +- 0.7; 4.1
33	248	4.3	18.7 +- 0.6; 2.8	10.8 +- 0.6; 4.0
34	216	4.1	18.8 +- 0.6; 2.8	10.9 +- 0.6; 4.0
35	234	12.0	21.8 +- 0.7; 3.3	13.6 +- 0.7; 4.3
36	182	10.0	Missing Dosimeter	No Net Data
37	177	10.0	19.8 +- 0.6; 3.0	11.8 +- 0.7; 4.1
38	323	12.0	23.1 +- 0.7; 3.5	14.8 +- 0.7; 4.4
39	321	13.0	22.7 +- 0.7; 3.4	14.4 +- 0.7; 4.4
40	323	12.0	23.2 +- 0.7; 3.5	14.9 +- 0.7; 4.4

Transit Dose = 6.6 +- 0.4; 3.5

HATCH

For the period 930914-940209

TLD Direct Radiation Environmental Monitoring

Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	13.3 +- 0.9	3
11.26 - 33.75 NNE	13.1 +- 0.2	2
33.76 - 56.25 NE	14.5 +- 2.6	3
56.26 - 78.75 ENE	13.8 +- 0.0	1
78.76 - 101.25 E	No Data +- No Data	0
101.26 - 123.75 ESE	11.9 +- 0.7	4
123.76 - 146.25 SE	12.6 +- 1.1	2
146.26 - 168.75 SSE	12.1 +- 0.3	3
168.76 - 191.25 S	11.8 +- 1.4	3
191.26 - 213.75 SSW	11.4 +- 2.6	2
213.76 - 236.25 SW	11.9 +- 1.5	3
236.26 - 258.75 WSW	11.6 +- 1.1	2
258.76 - 281.25 W	13.2 +- 1.4	2
281.26 - 303.75 WNW	13.8 +- 1.6	2
303.76 - 326.25 NW	12.6 +- 0.0	1
326.26 - 348.75 NNW	13.9 +- 1.6	3


Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	12.9 +- 0.8	10
2 - 5	12.0 +- 1.2	16
> 5	13.6 +- 1.9	10
Upwind Control	14.7 +- 0.3	3

HATCH

TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	342	23.0 VIDALIA FIRE STATION
2	359	7.7 TOOMBS CENTRAL SCHOOL
3	354	4.5 HWY. 1 & RD. 43
4	336	2.9 HWY. 107 (TAYLOR CHAPEL)
5	309	4.6 RD. S 1125
6	297	5.6 GRAYS LANDING
7	24	2.8 DEAD RIVER RD.
8	49	2.0 DEAD RIVER RD.
9	49	10.0 GA STATE PRISON
10	28	4.8 RD. 30
11	67	5.0 PROVIDENCE CHURCH
12	50	5.1 MARVEY CHURCH
13	353	2.0 RD. 49
14	141	1.6 WILLIAMS CR. BRIDGE
15	47	10.0 MCTIER CHURCH
16	232	0.9 HWY. 1 AT POND
17	205	1.6 HWY. 1 NEAR HVT LINES
18	192	4.2 ALTOMADA SCH.
19	184	4.2 RD. 538
20	165	4.6 RD. 538 AT POND
21	135	4.4 RD. 380 & 377
22	120	4.1 RD. 377 & 382
23	107	3.7 RD. 382
24	123	14.0 BETHEL CHURCH
25	114	12.0 OAK GROVE CHURCH
26	142	1.8 RD. 386
27	157	2.2 RD. 383
28	171	0.9 RD. 383 (N.R.)
29	253	1.0 CALVARY CHURCH
30	270	1.0 RD. 467
31	292	1.1 RD. 467
32	268	4.2 RD. 3 & 1
33	248	4.3 RD. 1 & 11
34	216	4.1 MELTON CHAPEL
35	234	12.0 GRAHAM (GA)
36	182	10.0 SHELL STATION
37	177	10.0 BAXLEY SUBSTATION
38	323	12.0 SUBSTATION (ALSTON GA)
39	321	13.0 HWY. 135 & RT. 107
40	323	12.0 RT. 107 AND RT. 113

NRC TLD DOSES FOR HATCH AREA

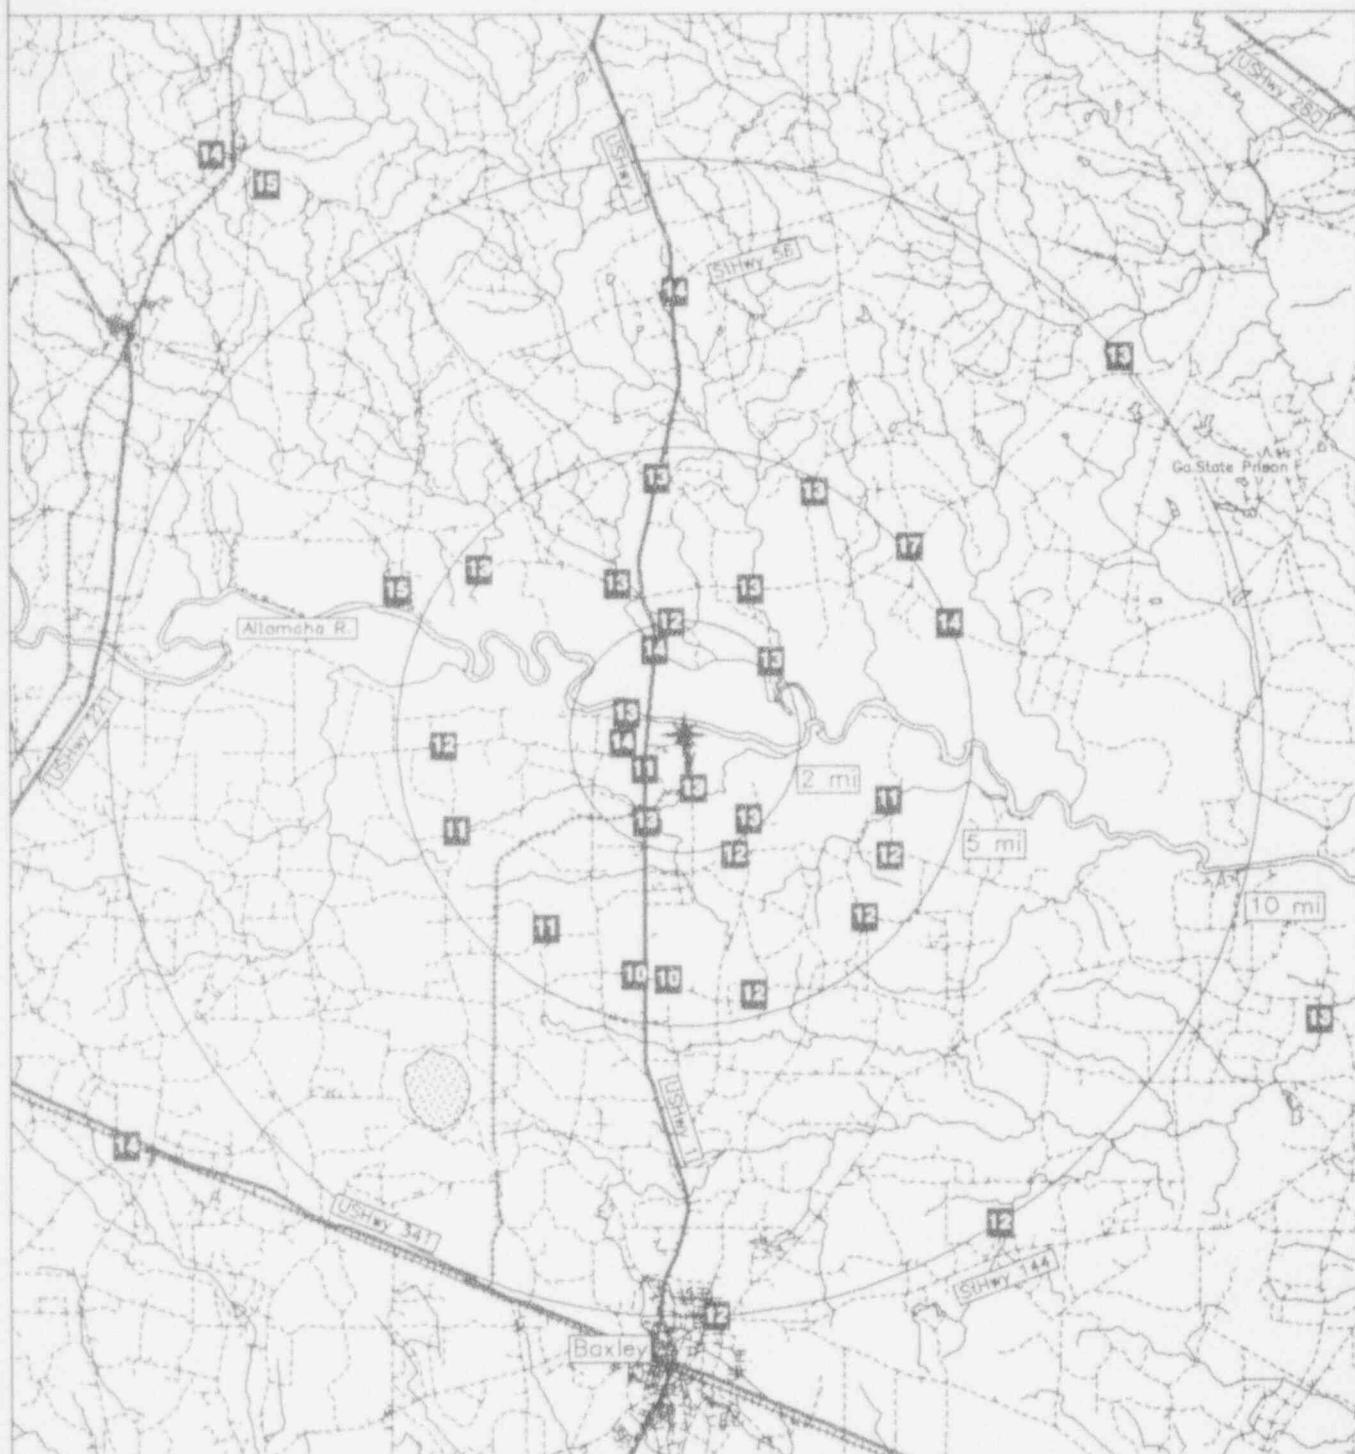

Miles

A horizontal scale bar with three tick marks labeled 0, 2, and 4 miles.

Legend

- Water
- Highways

- Railroads
- Roads



INDIAN POINT

TLD Direct Radiation Environmental Monitoring
 For the period 930915-940127 135 Days
 Field Time: 85 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) --Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) --Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	52	1.4	Damaged Dosimeter	No Net Data
2	53	1.0	18.7 +- 0.6; 2.8	12.9 +- 1.7
3	61	1.5	20.1 +- 0.6; 3.0	15.0 +- 2.1
4	89	1.2	20.6 +- 0.6; 3.1	15.0 +- 1.5
5	107	0.9	19.3 +- 0.6; 2.9	15.3 +- 1.7
6	90	0.5	19.1 +- 0.6; 2.9	15.6 +- 1.5
7	133	0.8	18.6 +- 0.6; 2.8	15.9 +- 1.6
8	158	0.8	19.8 +- 0.6; 3.0	15.8 +- 1.4
9	188	1.2	19.6 +- 0.6; 2.9	16.9 +- 1.7
10	206	0.9	19.1 +- 0.6; 2.9	15.4 +- 1.8
11	170	1.1	17.5 +- 0.5; 2.6	13.6 +- 1.5
12	155	2.3	20.0 +- 0.6; 3.0	14.9 +- 1.9
13	136	3.2	20.0 +- 0.6; 3.0	14.9 +- 1.6
14	107	3.1	18.7 +- 0.6; 2.8	13.9 +- 1.7
15	94	3.8	19.0 +- 0.6; 2.8	14.8 +- 1.4
16	142	5.7	Missing Dosimeter	No Net Data
18	147	9.1	21.2 +- 0.6; 3.2	16.3 +- 1.6
19	137	12.0	18.4 +- 0.6; 2.8	16.2 +- 1.6
20	129	12.0	19.0 +- 0.6; 2.8	15.1 +- 2.3
22	74	7.5	18.8 +- 0.6; 2.8	15.1 +- 1.7
23	5	100.0	22.5 +- 0.7; 3.4	15.6 +- 1.6
24	5	100.0	22.4 +- 0.7; 3.4	16.8 +- 1.5
25	65	4.1	17.4 +- 0.5; 2.6	16.7 +- 1.7
26	40	4.0	22.6 +- 0.7; 3.4	15.0 +- 1.8
27	25	5.3	21.6 +- 0.6; 3.2	18.0 +- 1.4
28	24	2.9	19.9 +- 0.6; 3.0	16.3 +- 1.8
29	22	2.1	19.4 +- 0.6; 2.9	15.7 +- 1.5
30	8	1.9	18.3 +- 0.5; 2.7	15.6 +- 1.6
31	356	5.0	18.8 +- 0.6; 2.8	16.8 +- 1.7
32	330	3.7	Missing Dosimeter	No Net Data
33	338	4.7	21.3 +- 0.6; 3.2	17.2 +- 1.7
34	354	7.0	22.7 +- 0.7; 3.4	17.5 +- 1.5
35	297	4.4	20.4 +- 0.6; 3.1	19.3 +- 3.0
36	309	3.6	29.2 +- 0.9; 4.4	15.1 +- 0.8; 4.5
37	350	1.1	20.0 +- 0.6; 3.0	16.6 +- 1.8
38	337	0.9	20.8 +- 0.6; 3.1	24.5 +- 1.0; 5.6
39	315	1.0	19.3 +- 0.6; 2.9	22.8 +- 6.8
40	294	1.1	Damaged Dosimeter	17.0 +- 1.5
41	274	1.1	21.2 +- 0.6; 3.2	No Net Data
42	248	1.5	20.4 +- 0.6; 3.1	17.0 +- 2.0
44	5	100.0	21.7 +- 0.6; 3.2	18.6 +- 1.9
45	227	2.4	19.2 +- 0.6; 2.9	17.5 +- 2.0
46	209	3.2	18.2 +- 0.5; 2.7	16.6 +- 1.7
47	218	5.3	19.8 +- 0.6; 3.0	16.8 +- 2.2
48	201	4.6	20.8 +- 0.6; 3.1	15.3 +- 2.2
49	187	5.2	17.3 +- 0.5; 2.6	15.4 +- 1.6
50	171	7.1	20.0 +- 0.6; 3.0	16.2 +- 1.5
			11.8 +- 0.7; 4.2	14.1 +- 1.7
			14.7 +- 0.8; 4.5	14.5 +- 1.6

Transit Dose = 6.1 +- 0.4; 3.0

INDIAN POINT

For the period 930915-940127

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	14.7 +- 2.1	4
11.26 - 33.75 NNE	15.0 +- 1.2	3
33.76 - 56.25 NE	15.4 +- 2.9	2
56.26 - 78.75 ENE	13.4 +- 1.4	3
78.76 - 101.25 E	14.2 +- 0.9	3
101.26 - 123.75 ESE	13.7 +- 0.4	2
123.76 - 146.25 SE	13.6 +- 0.8	4
146.26 - 168.75 SSE	15.1 +- 0.8	3
168.76 - 191.25 S	13.2 +- 1.4	4
191.26 - 213.75 SSW	14.0 +- 1.4	3
213.76 - 236.25 SW	14.2 +- 0.5	2
236.26 - 258.75 WSW	15.1 +- 0.0	1
258.76 - 281.25 W	15.9 +- 0.0	1
281.26 - 303.75 WNW	15.1 +- 0.0	1
303.76 - 326.25 NW	19.2 +- 7.4	2
326.26 - 348.75 NNW	15.8 +- 0.3	2

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	14.2 +- 1.0	16
2 - 5	15.0 +- 2.9	15
> 5	14.6 +- 1.8	9
Upwind Control	17.0 +- 0.5	3

INDIAN POINT
TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	52	1.4
2	53	1.0
3	61	1.5
4	89	1.2
5	107	0.9
6	90	0.5
7	133	0.8
8	158	0.8
9	188	1.2
10	206	0.9
11	170	1.1
12	155	2.3
13	136	3.2
14	107	3.1
15	94	3.8
16	142	5.7
18	147	9.1
19	137	12.0
20	129	12.0
22	74	7.5
23	5	100.0
24	5	100.0
25	65	4.1
26	40	4.0
27	25	5.3
28	24	2.9
29	22	2.1
30	8	1.9
31	356	5.0
32	330	3.7
33	338	4.7
34	354	7.0
35	297	4.4
36	309	3.6
37	350	1.1
38	337	0.9
39	315	1.0
40	294	1.1
41	274	1.1
42	248	1.5
44	5	100.0
45	227	2.4
46	209	3.2
47	218	5.3
48	201	4.6
49	187	5.2
50	171	7.1

NRC TLD DOSES FOR INDIAN POINT AREA

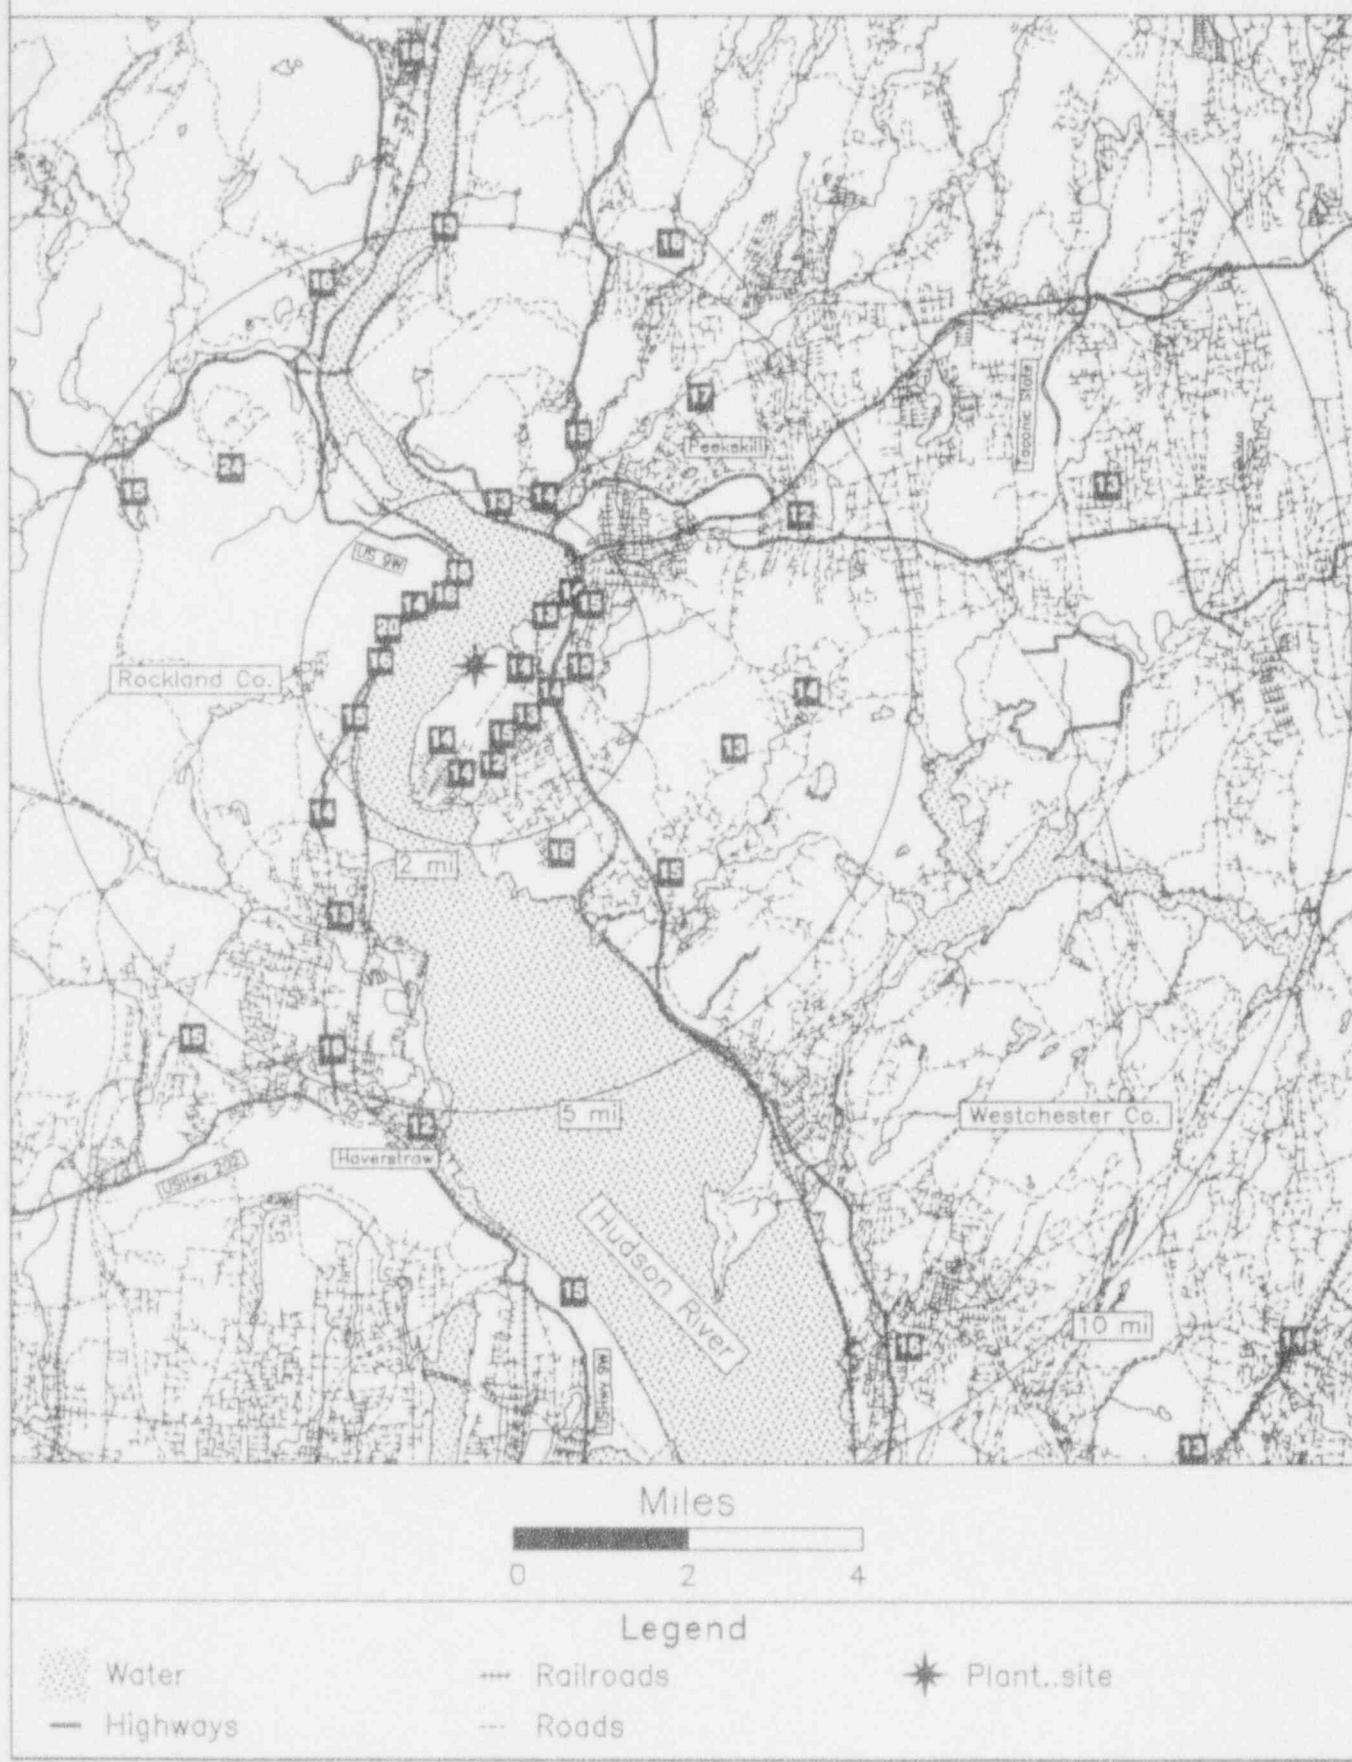

KEWAUNEE/PT. BEACH
 TLD Direct Radiation Environmental Monitoring
 For the period 930914-940208 148 Days
 Field Time: 104 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	189	8.1	20.3 +- 0.6; 3.0	11.1 +- 0.7; 4.1
2	195	7.0	23.9 +- 0.7; 3.6	14.2 +- 0.7; 4.4
3	163	4.9	20.9 +- 0.6; 3.1	11.5 +- 0.7; 4.2
4	183	3.3	25.3 +- 0.8; 3.8	15.4 +- 0.8; 4.6
5	210	3.2	20.1 +- 0.6; 3.0	10.8 +- 0.7; 4.1
6	223	3.7	24.5 +- 0.7; 3.7	14.7 +- 0.8; 4.5
7	242	5.7	22.3 +- 0.7; 3.4	12.8 +- 0.7; 4.3
8	202	1.8	Damaged Dosimeter	No Net Data
9	180	1.8	Damaged Dosimeter	No Net Data
10	158	1.9	20.6 +- 0.6; 3.1	11.3 +- 0.7; 4.1
11	235	1.2	25.9 +- 0.8; 3.9	15.9 +- 0.8; 4.6
12	258	1.4	23.8 +- 0.7; 3.6	14.1 +- 0.7; 4.4
13	273	1.4	23.7 +- 0.7; 3.6	14.0 +- 0.7; 4.4
14	290	0.9	25.0 +- 0.7; 3.7	15.1 +- 0.8; 4.5
15	333	0.8	23.1 +- 0.7; 3.5	13.5 +- 0.7; 4.4
16	342	1.9	23.8 +- 0.7; 3.6	14.1 +- 0.7; 4.4
17	317	2.0	20.9 +- 0.6; 3.1	11.6 +- 0.7; 4.2
18	310	3.4	26.5 +- 0.8; 4.0	16.4 +- 0.8; 4.7
19	293	4.0	21.9 +- 0.7; 3.3	12.4 +- 0.7; 4.3
20	273	4.0	21.8 +- 0.7; 3.3	12.4 +- 0.7; 4.3
21	300	5.6	23.1 +- 0.7; 3.5	13.4 +- 0.7; 4.4
22	316	5.9	25.0 +- 0.7; 3.7	15.1 +- 0.8; 4.5
23	345	2.7	25.8 +- 0.8; 3.9	15.8 +- 0.8; 4.6
24	219	1.3	22.5 +- 0.7; 3.4	12.9 +- 0.7; 4.3
25	247	1.4	24.9 +- 0.7; 3.7	15.1 +- 0.8; 4.5
26	263	1.3	25.5 +- 0.8; 3.8	15.5 +- 0.8; 4.6
27	290	1.4	27.3 +- 0.8; 4.1	17.2 +- 0.8; 4.8
28	320	1.3	24.1 +- 0.7; 3.6	14.3 +- 0.8; 4.5
29	342	1.1	23.5 +- 0.7; 3.5	13.8 +- 0.7; 4.4
30	329	0.6	25.4 +- 0.8; 3.8	15.5 +- 0.8; 4.6
31	13	1.0	23.2 +- 0.7; 3.5	13.6 +- 0.7; 4.4
32	353	2.1	25.1 +- 0.8; 3.8	15.2 +- 0.8; 4.5
33	301	3.9	22.9 +- 0.7; 3.4	13.3 +- 0.7; 4.3
34	299	8.4	24.7 +- 0.7; 3.7	14.8 +- 0.8; 4.5
35	323	3.8	21.4 +- 0.6; 3.2	12.0 +- 0.7; 4.2
36	336	3.3	25.3 +- 0.8; 3.8	15.4 +- 0.8; 4.6
37	6	3.1	21.8 +- 0.7; 3.3	12.3 +- 0.7; 4.2
38	14	3.7	22.6 +- 0.7; 3.4	13.0 +- 0.7; 4.3
39	13	7.6	24.3 +- 0.7; 3.6	14.5 +- 0.8; 4.5
40	247	4.3	28.7 +- 0.9; 4.3	18.3 +- 0.9; 4.9
41	8	23.0	19.9 +- 0.6; 3.0	10.7 +- 0.7; 4.1
42	8	23.0	22.1 +- 0.7; 3.3	12.6 +- 0.7; 4.3
43	8	23.0	20.0 +- 0.6; 3.0	10.8 +- 0.7; 4.1

Transit Dose = 7.5 +- 0.5; 3.7

KEWAUNEE/PT. BEACH
For the period 930914-940208

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	13.8 +- 2.0	2
11.26 - 33.75 NNE	13.7 +- 0.7	3
33.76 - 56.25 NE	No Data +- No Data	0
56.26 - 78.75 ENE	No Data +- No Data	0
78.76 - 101.25 E	No Data +- No Data	0
101.26 - 123.75 ESE	No Data +- No Data	0
123.76 - 146.25 SE	No Data +- No Data	0
146.26 - 168.75 SSE	11.4 +- 0.2	2
168.76 - 191.25 S	13.2 +- 3.0	2
191.26 - 213.75 SSW	12.5 +- 2.4	2
213.76 - 236.25 SW	14.5 +- 1.5	3
236.26 - 258.75 WSW	15.1 +- 2.3	4
258.76 - 281.25 W	14.0 +- 1.6	3
281.26 - 303.75 WNW	14.4 +- 1.7	6
303.76 - 326.25 NW	13.9 +- 2.1	5
326.26 - 348.75 NNW	14.7 +- 1.0	6

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	14.2 +- 1.5	16
2 - 5	13.9 +- 2.1	15
> 5	13.7 +- 1.4	7
Upwind Control	11.4 +- 1.1	3

KEWAUNEE/PT. BEACH
TLD Direct Radiation Environmental Monitoring

NRC Station	Location	Azimuth / Distance Degree / Mile	Description
1	HWY. 42 & 34TH AVE.	189	8.1
2	COUNTY RD. VV & TANNERY RD.	195	7.0
3	PT. BEACH STATE PARK	163	4.9
4	LAKE SHORE RD. & RAVINE DR.	183	3.3
5	ELECTRICAL POWER SUBSTATION ON COUNTY RD. V	210	3.2
6	COUNTY RD. V & TANNERY RD.	223	3.7
7	COUNTY RD. V	242	5.7
8	IRISH RD.	202	1.8
9	IRISH RD.	180	1.8
10	IRISH RD. & LAKE SHORE RD.	158	1.9
11	NUCLEAR RD. & TWIN ELDER RD.	235	1.2
12	HWY. 42	258	1.4
13	HWY. 42	273	1.4
14	TAPAWINGO RD.	290	0.9
15	LAKE SHORE RD.	333	0.8
16	TWO CREEKS RD. & LAKE SHORE RD.	342	1.9
17	TWO CREEKS RD. & HWY. 42	317	2.0
18	ZANDER RD. & TANNERY RD.	310	3.4
19	SAXONBURG RD.	293	4.0
20	SAXONBURG RD. & TAPAWINGO RD.	273	4.0
21	TISCH MILLS	300	5.6
22	NUCLEAR RD. & COUNTY RD. B	316	5.9
23	LAKE SHORE RD.	345	2.7
24	COUNTY RD. BB & RADAJACK LANE	219	1.3
25	WOODSIDE AVE.	247	1.4
26	WOODSIDE AVE.	263	1.3
27	WOODSIDE AVE.	290	1.4
28	SANDY BAY RD.	320	1.3
29	SANDY BAY RD. & HWY. 42	342	1.1
30	HWY. 42	329	0.6
31	SANDY BAY RD. & CEMETERY RD.	13	1.0
32	HWY. 42 & LAKE SHORE RD./COUNTY RD. G	353	2.1
33	COUNTY RD. G	301	3.9
34	HWY. 163	299	8.4
35	TOWN HALL RD.	323	3.8
36	OLD SETTLER RD. & WOODSIDE AVE.	336	3.3
37	OLD SETTLER RD.	6	3.1
38	LAKE SHORE RD. & LAKE RD.	14	3.7
39	HWY. 42	13	7.6
40	ASPEN RD. & SAXONBURG RD.	247	4.3
41	UWC - HWY. 42	8	23.0
42	UWC - HWY. 42	8	23.0
43	UWC - HWY. 42	8	23.0

NRC TLD DOSES FOR KEWAUNEE AREA

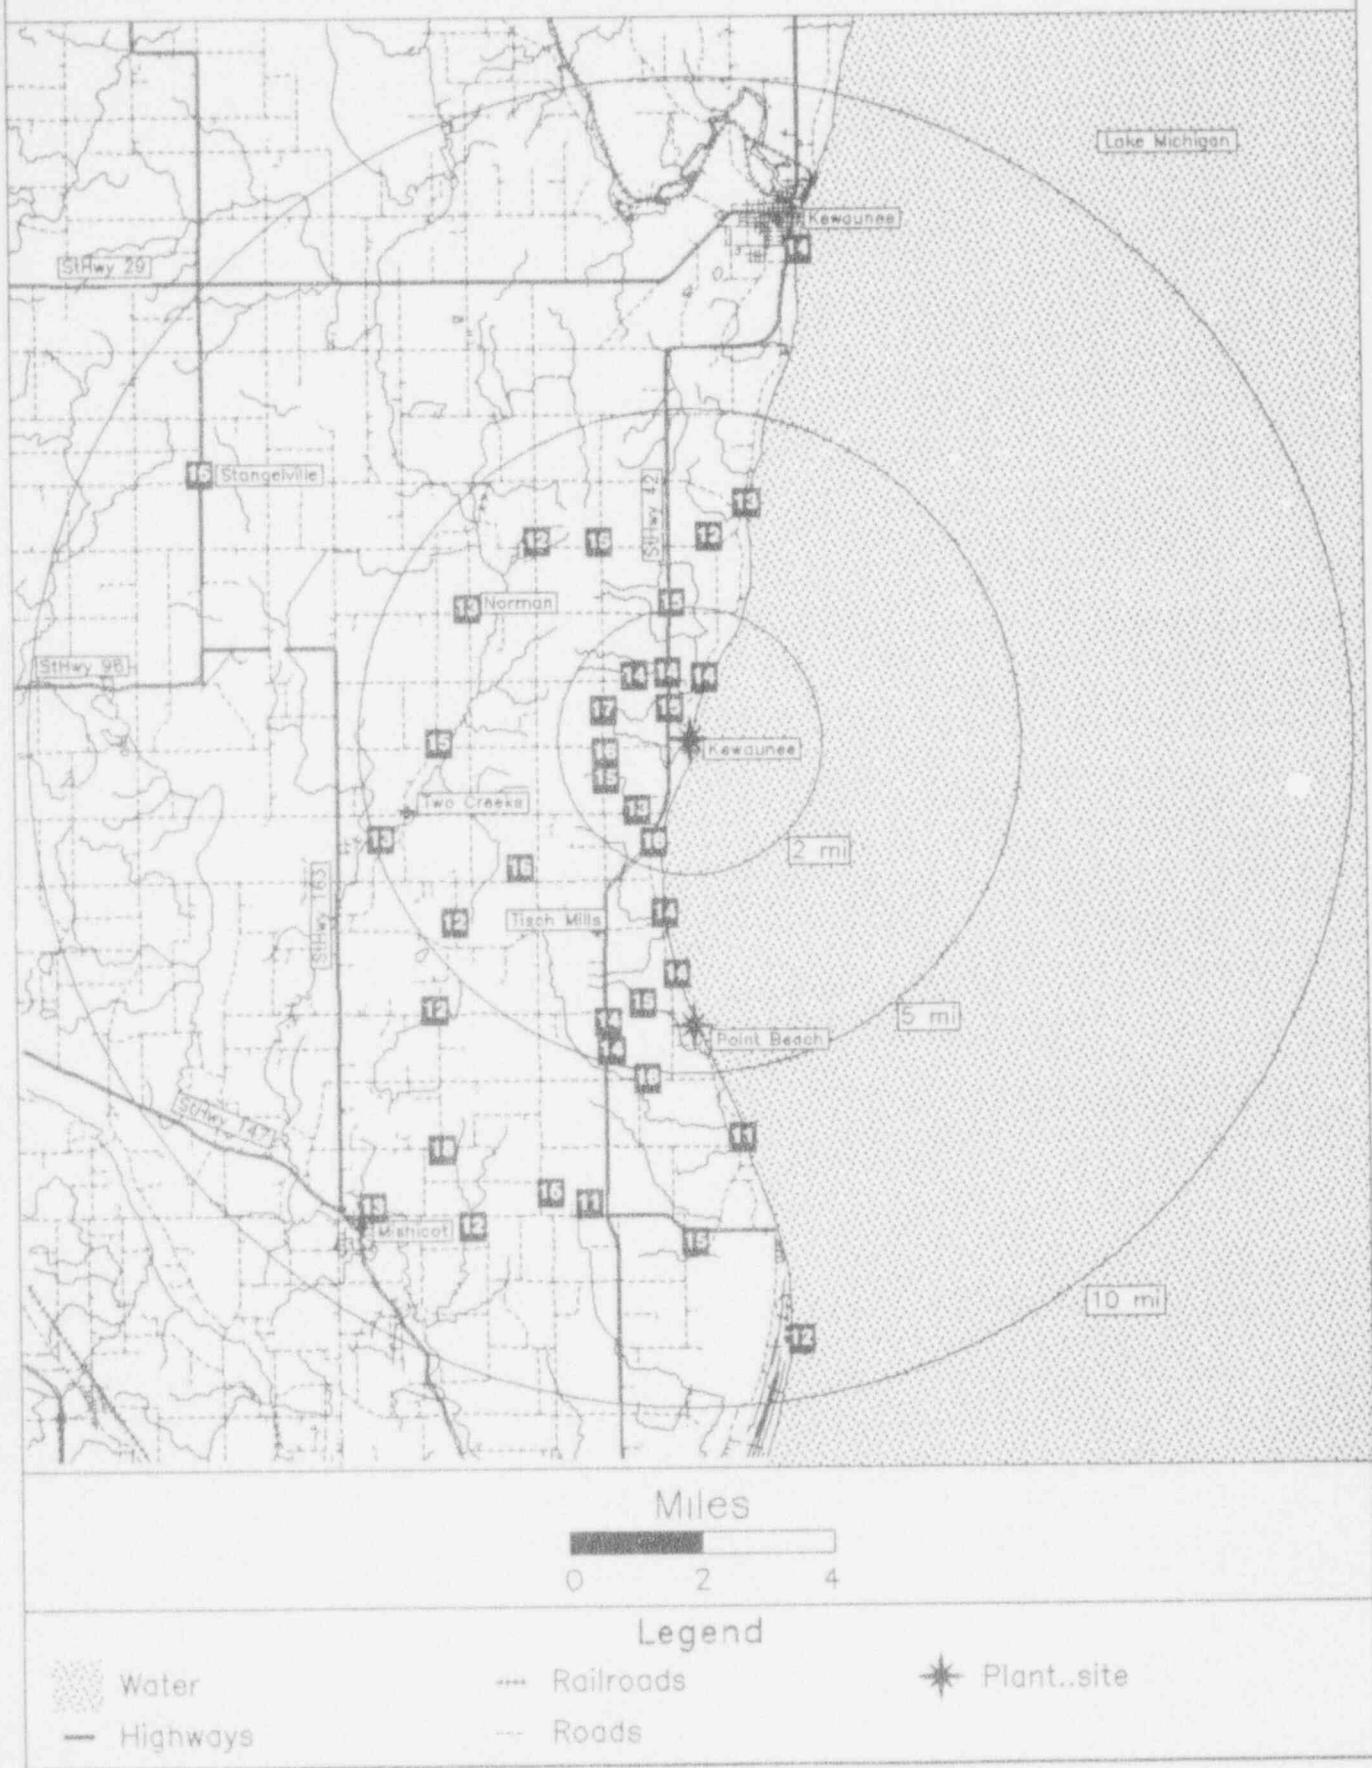

LACROSSE

TLD Direct Radiation Environmental Monitoring
 For the period 930914-940203 143 Days
 Field Time: 92 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	5 20.0	20.6 +- 0.6; 3.1	13.2 +- 0.7; 4.4	15.0 +- 1.9
2	5 20.0	21.9 +- 0.7; 3.3	14.4 +- 0.8; 4.6	15.2 +- 1.6
3	3 20.0	23.2 +- 0.7; 3.5	15.7 +- 0.8; 4.7	15.7 +- 1.5
4	343 3.8	20.9 +- 0.6; 3.1	13.4 +- 0.8; 4.4	15.1 +- 1.6
5	313 3.8	23.6 +- 0.7; 3.5	16.1 +- 0.8; 4.7	17.4 +- 2.8
6	291 3.0	22.4 +- 0.7; 3.4	14.8 +- 0.8; 4.6	16.2 +- 1.5
7	261 4.8	23.8 +- 0.7; 3.6	16.2 +- 0.8; 4.7	17.7 +- 1.7
8	249 3.2	23.1 +- 0.7; 3.5	15.6 +- 0.8; 4.7	17.5 +- 1.8
9	214 5.0	27.4 +- 0.8; 4.1	19.8 +- 0.9; 5.2	15.7 +- 1.7
10	171 9.8	21.9 +- 0.7; 3.3	14.3 +- 0.8; 4.5	14.3 +- 1.4
11	176 5.1	21.9 +- 0.7; 3.3	14.4 +- 0.8; 4.6	14.8 +- 1.1
12	165 4.9	24.1 +- 0.7; 3.6	16.6 +- 0.8; 4.8	16.3 +- 1.4
13	138 3.5	24.1 +- 0.7; 3.6	16.6 +- 0.8; 4.8	16.6 +- 1.7
14	114 4.2	24.2 +- 0.7; 3.6	16.7 +- 0.8; 4.8	15.5 +- 1.5
15	97 3.9	21.9 +- 0.7; 3.3	14.4 +- 0.8; 4.5	14.8 +- 1.0
16	94 3.0	23.2 +- 0.7; 3.5	15.7 +- 0.8; 4.7	16.8 +- 1.7
17	105 2.0	20.6 +- 0.6; 3.1	13.1 +- 0.7; 4.4	17.0 +- 2.0
18	52 1.5	20.9 +- 0.6; 3.1	13.4 +- 0.8; 4.4	14.4 +- 1.5
19	16 1.5	22.6 +- 0.7; 3.4	15.0 +- 0.8; 4.6	14.7 +- 1.3
20	1 1.0	19.6 +- 0.6; 2.9	12.1 +- 0.7; 4.3	13.9 +- 1.3
21	358 0.5	23.6 +- 0.7; 3.5	16.1 +- 0.8; 4.7	17.3 +- 1.4
22	180 0.6	24.8 +- 0.7; 3.7	17.2 +- 0.8; 4.9	16.3 +- 1.4
23	134 1.7	21.2 +- 0.6; 3.2	13.7 +- 0.8; 4.5	16.8 +- 1.5
24	58 0.6	25.2 +- 0.8; 3.8	17.6 +- 0.9; 4.9	17.4 +- 1.8
25	59 3.1	22.9 +- 0.7; 3.4	15.4 +- 0.8; 4.7	17.5 +- 1.6
26	16 1.5	23.9 +- 0.7; 3.6	16.4 +- 0.8; 4.8	16.6 +- 1.7
27	26 5.1	21.4 +- 0.6; 3.2	13.9 +- 0.8; 4.5	15.5 +- 1.3
28	25 7.0	24.0 +- 0.7; 3.6	16.4 +- 0.8; 4.8	14.2 +- 1.7
29	4 4.8	23.2 +- 0.7; 3.5	15.7 +- 0.8; 4.7	16.1 +- 1.7

Transit Dose = 7.2 +- 0.4; 3.3

LACROSSE

For the period 930914-940203

TLD Direct Radiation Environmental Monitoring

Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	14.6 +- 2.2	3
11.26 - 33.75 NNE	15.4 +- 1.2	4
33.76 - 56.25 NE	13.4 +- 0.0	1
56.26 - 78.75 ENE	16.5 +- 1.6	2
78.76 - 101.25 E	15.0 +- 0.9	2
101.26 - 123.75 ESE	14.9 +- 2.5	2
123.76 - 146.25 SE	15.1 +- 2.0	2
146.26 - 168.75 SSE	16.6 +- 0.0	1
168.76 - 191.25 S	15.3 +- 1.6	3
191.26 - 213.75 SSW	No Data +- No Data	0
213.76 - 236.25 SW	19.8 +- 0.0	1
236.26 - 258.75 WSW	15.6 +- 0.0	1
258.76 - 281.25 W	16.2 +- 0.0	1
281.26 - 303.75 WNW	14.8 +- 0.0	1
303.76 - 326.25 NW	16.1 +- 0.0	1
326.26 - 348.75 NNW	13.4 +- 0.0	1


Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	15.0 +- 2.0	9
2 - 5	15.9 +- 1.5	13
> 5	14.8 +- 1.1	4
Upwind Control	14.4 +- 1.3	3

LACROSSE

TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	5	STATE OFFICE BLDG.
2	5	STATE OFFICE BLDG.
3	3	ST. DOMINIC'S MONASTERY
4	343	BROWNSVILLE
5	313	RENO - HWY. 26(POLE #BC1B94)
6	291	TREE ACROSS FROM STOP SIGN
7	261	HOUSTON CTY. RD. 14
8	249	RR NEXT TO HWY. 26
9	214	NEW ALBIN (LEFT OF HWY. 26)
10	171	DESOTO (WI)
11	176	VICTORY
12	165	COUNTY RD.
13	138	BAD AXE RD.
14	114	WARREN RD.
15	97	CREEK RD.
16	94	HWY. 56 (S. SIDE)
17	105	MOUND RIDGE RD.
18	52	HWY. 56 (TRUCK HILL SIGN)
19	16	HWY. 56 & COUNTY K RD.
20	1	GENOA
21	358	LOCK & DAM #8
22	180	HWY 35
23	134	PEDRETTI FARM
24	58	MALIN FARM
25	59	COUNTY K (LEFT SIDE)
26	16	COUNTY G RD.
27	26	BIRCHLAWN FARM
28	25	THUNDER COULEE
29	4	HWY. 35 AT WAYSIDE

NRC TLD DOSES FOR LACROSSE AREA

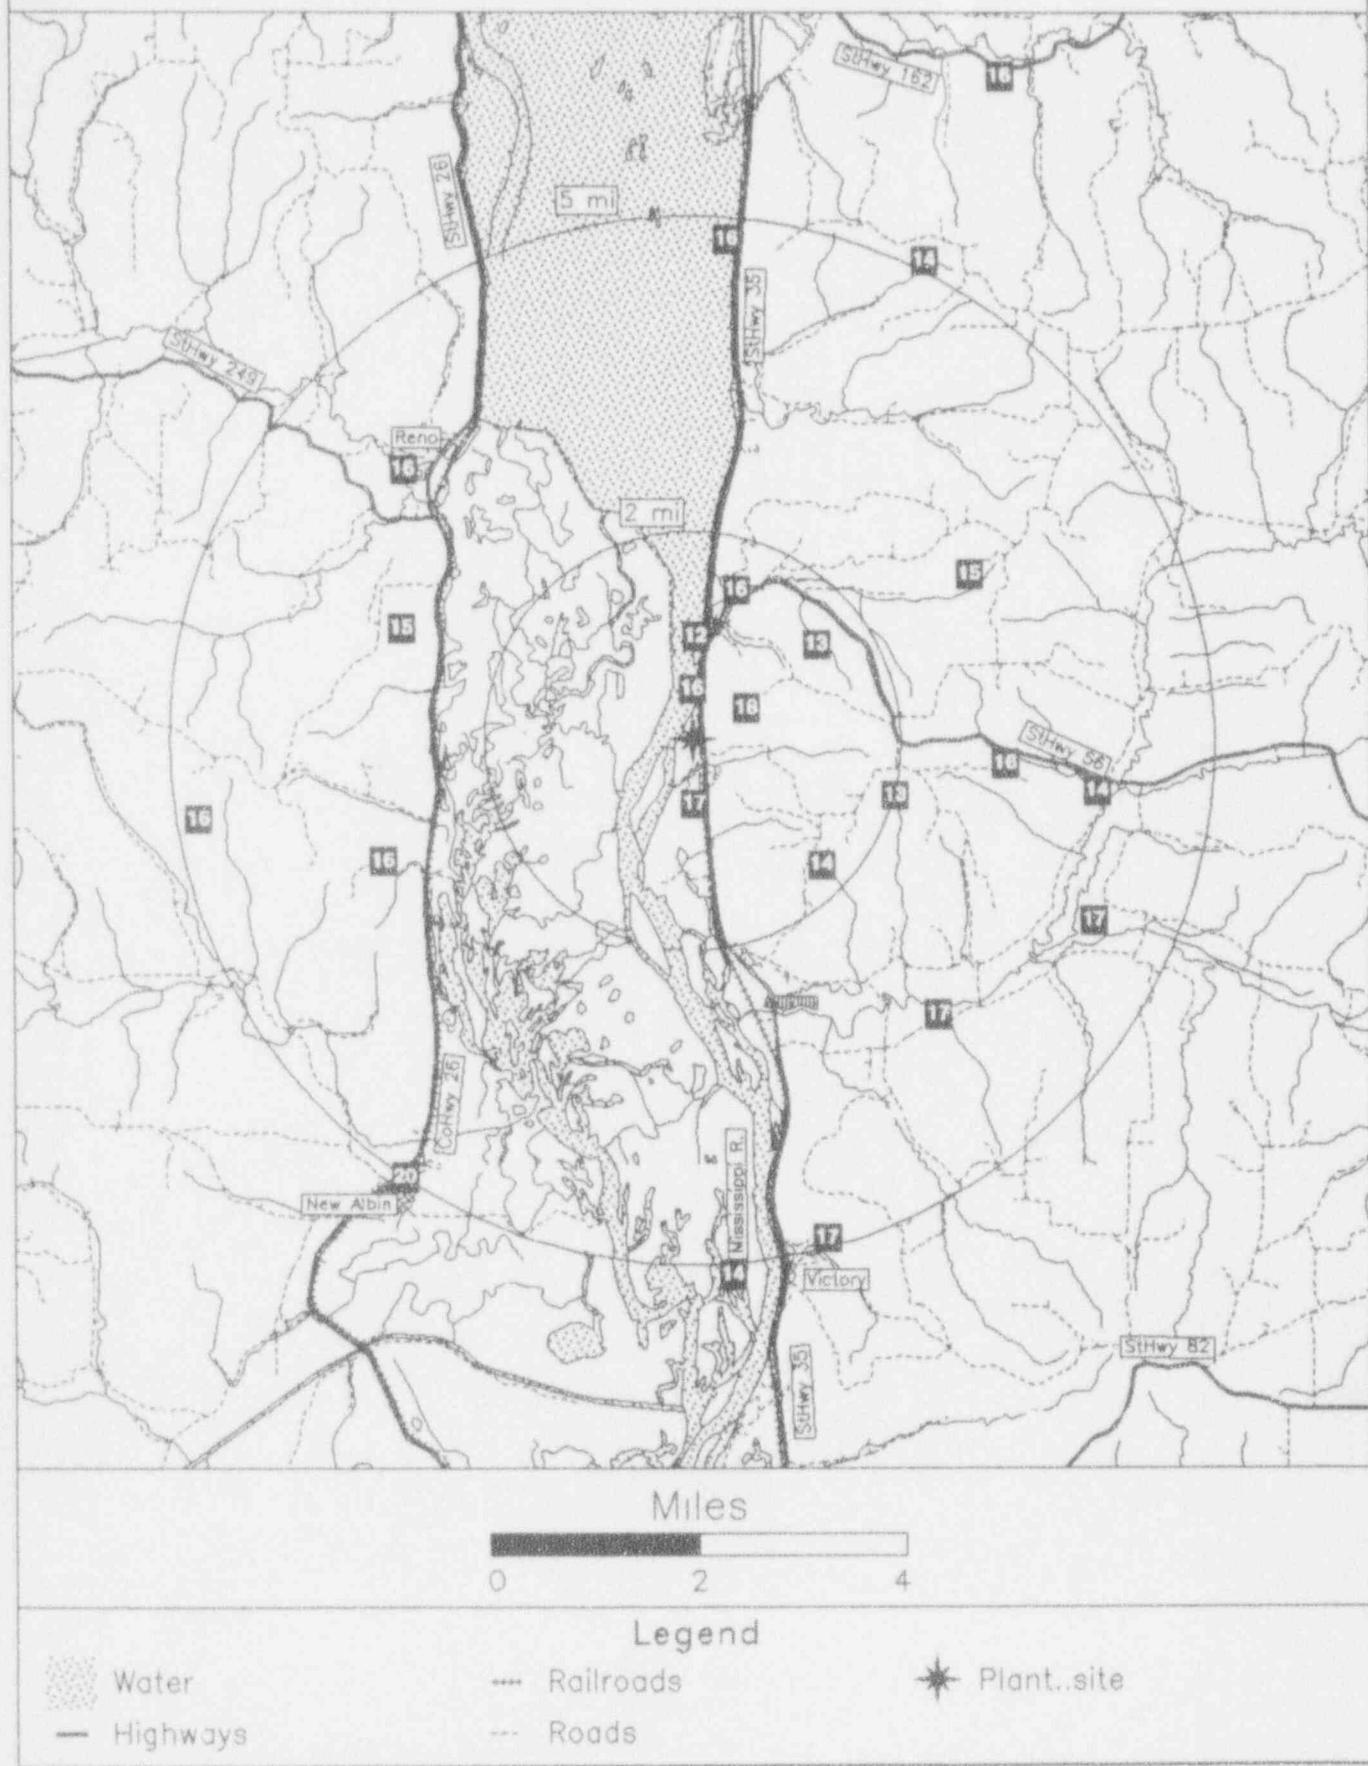

LASALLE
 TLD Direct Radiation Environmental Monitoring
 For the period 930914-940201 141 Days
 Field Time: 100 Days

NRC Sta	Location	Gross	Net Exposure Rate	Hist. Range
	Azimuth/Dist (Deg)/(Mi)	Exposure (mR) +-Rdm; Tot.	(mR/Std. Qtr.) +-Rdm; Tot.	Net Exp Rate +-1 Std Dev
1	302	10.0	20.8 +- 0.6; 3.1	15.8 +- 0.6; 4.0
2	335	5.3	24.8 +- 0.7; 3.7	19.4 +- 0.7; 4.4
3	343	5.8	21.1 +- 0.6; 3.2	16.1 +- 0.6; 4.0
4	38	5.5	25.9 +- 0.8; 3.9	20.3 +- 0.8; 4.5
5	39	4.3	19.4 +- 0.6; 2.9	14.5 +- 0.6; 3.9
6	27	3.8	22.3 +- 0.7; 3.3	17.1 +- 0.7; 4.1
7	2	4.1	24.8 +- 0.7; 3.7	19.4 +- 0.7; 4.4
8	304	4.6	24.5 +- 0.7; 3.7	19.1 +- 0.7; 4.4
9	292	3.9	21.7 +- 0.7; 3.3	16.6 +- 0.7; 4.1
10	281	3.7	26.0 +- 0.8; 3.9	20.4 +- 0.8; 4.5
11	248	4.0	23.7 +- 0.7; 3.5	18.4 +- 0.7; 4.3
12	222	12.0	22.9 +- 0.7; 3.4	17.6 +- 0.7; 4.2
13	212	18.0	23.3 +- 0.7; 3.5	18.1 +- 0.7; 4.2
14	212	18.0	23.7 +- 0.7; 3.6	18.4 +- 0.7; 4.3
15	212	18.0	24.3 +- 0.7; 3.6	18.9 +- 0.7; 4.3
16	215	4.4	24.8 +- 0.7; 3.7	19.4 +- 0.7; 4.4
17	204	4.0	25.0 +- 0.7; 3.7	19.5 +- 0.7; 4.4
18	173	4.6	23.8 +- 0.7; 3.6	18.5 +- 0.7; 4.3
19	174	6.4	22.0 +- 0.7; 3.3	16.8 +- 0.7; 4.1
20	158	3.6	23.0 +- 0.7; 3.5	17.8 +- 0.7; 4.2
21	124	4.2	23.8 +- 0.7; 3.6	18.5 +- 0.7; 4.3
22	114	3.8	24.0 +- 0.7; 3.6	18.6 +- 0.7; 4.3
23	97	4.5	23.8 +- 0.7; 3.6	18.5 +- 0.7; 4.3
24	72	4.7	25.4 +- 0.8; 3.8	19.9 +- 0.8; 4.5
25	41	2.0	24.7 +- 0.7; 3.7	19.3 +- 0.7; 4.4
26	11	1.6	23.8 +- 0.7; 3.6	18.5 +- 0.7; 4.3
27	358	1.5	23.4 +- 0.7; 3.5	18.1 +- 0.7; 4.3
28	336	1.6	22.9 +- 0.7; 3.4	17.7 +- 0.7; 4.2
29	310	2.3	22.9 +- 0.7; 3.4	17.7 +- 0.7; 4.2
30	301	2.0	26.8 +- 0.8; 4.0	21.2 +- 0.8; 4.6
31	271	1.7	24.4 +- 0.7; 3.7	19.0 +- 0.7; 4.4
32	256	1.8	Damaged Dosimeter	No Net Data
33	227	2.4	25.9 +- 0.8; 3.9	20.4 +- 0.8; 4.5
34	204	1.7	24.6 +- 0.7; 3.7	19.2 +- 0.7; 4.4
35	165	1.6	27.4 +- 0.8; 4.1	21.7 +- 0.8; 4.7
36	149	1.8	26.3 +- 0.8; 3.9	20.7 +- 0.8; 4.5
37	139	2.1	24.0 +- 0.7; 3.6	18.6 +- 0.7; 4.3
38	111	1.5	21.6 +- 0.6; 3.2	16.5 +- 0.7; 4.1
39	265	0.6	25.9 +- 0.8; 3.9	20.3 +- 0.8; 4.5

Transit Dose = 3.3 +- 0.3; 3.2

LASALLE

For the period 930914-940201

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	18.7 +- 0.6	3
11.26 - 33.75 NNE	17.1 +- 0.0	1
33.76 - 56.25 NE	18.0 +- 3.1	3
56.26 - 78.75 ENE	19.9 +- 0.0	1
78.76 - 101.25 E	18.5 +- 0.0	1
101.26 - 123.75 ESE	17.6 +- 1.5	2
123.76 - 146.25 SE	18.5 +- 0.1	2
146.26 - 168.75 SSE	20.1 +- 2.0	3
168.76 - 191.25 S	17.6 +- 1.2	2
191.26 - 213.75 SSW	19.4 +- 0.3	2
213.76 - 236.25 SW	19.1 +- 1.4	3
236.26 - 258.75 WSW	18.4 +- 0.0	1
258.76 - 281.25 W	19.9 +- 0.8	3
281.26 - 303.75 WNW	17.8 +- 2.9	3
303.76 - 326.25 NW	18.4 +- 1.0	2
326.26 - 348.75 NNW	17.7 +- 1.6	3

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	19.3 +- 1.6	11
2 - 5	18.5 +- 1.4	18
> 5	17.7 +- 1.8	6
Upwind Control	18.4 +- 0.4	3

LASALLE
TLD Direct Radiation Environmental Monitoring

NRC Station	Location	Azimuth / Distance Degree / Mile	Description
1	302	10.0	MCKINLEY & CATHERINE STRS. (OTTAWA)
2	335	5.3	E 22 RD. (CTY. 15) N2653/E2350
3	343	5.8	AURORA ST. & WALLACE ST. (MARSEILLES)
4	38	5.5	OAK ST. (SENECA)
5	39	4.3	N. 2553 RD. (CTY 36)
6	27	3.8	N. 2553 RD. (CTY 36)
7	2	4.1	N. 2553 RD. (CTY 36)
8	304	4.6	N. 24 & E. 22 RD.
9	292	3.9	N. 23 & E. 22 RD.
10	281	3.7	N. 22 & E. 22 RD.
11	248	4.0	N. 20 & E. 22 RD.
12	222	12.0	ILLINOIS ST. (STREATOR)
13	212	18.0	HWY. 23
14	212	18.0	HWY. 23
15	212	18.0	2650N/500E
16	215	4.4	N. 18 RD.
17	204	4.0	N. 18 & E. 24 RD.
18	173	4.6	N. 17 RD.
19	174	6.4	PLUMB ST. & MORTON ST. (RANSOM)
20	158	3.6	N. 18 & E. 27 RD.
21	124	4.2	HWY. 170
22	114	3.8	HWY. 170 & N. 20 RD.
23	97	4.5	N. 21 & E. 30 RD.
24	72	4.7	N. 23 ST. & E. 30 RD.
25	41	2.0	N. 23 RD.
26	11	1.6	N23 / E2609
27	358	1.5	N. 23 RD.
28	336	1.6	E. 25 & N. 23 RD.
29	310	2.3	E. 24 & N. 23 RD.
30	301	2.0	E. 24 RD.
31	271	1.7	E. 24 RD.
32	256	1.8	N. 21 & E. 24 RD.
33	227	2.4	N. 20 & E. 24 RD.
34	204	1.7	N. 20 & E. 25 RD.
35	165	1.6	N. 20 & E. 26 RD.
36	149	1.8	N. 20 RD.
37	139	2.1	E. 27 & N. 20 RD.
38	111	1.5	N. 21 & E. 27 RD.
39	265	0.6	E. 25 RD.

NRC TLD DOSES FOR LASALLE AREA

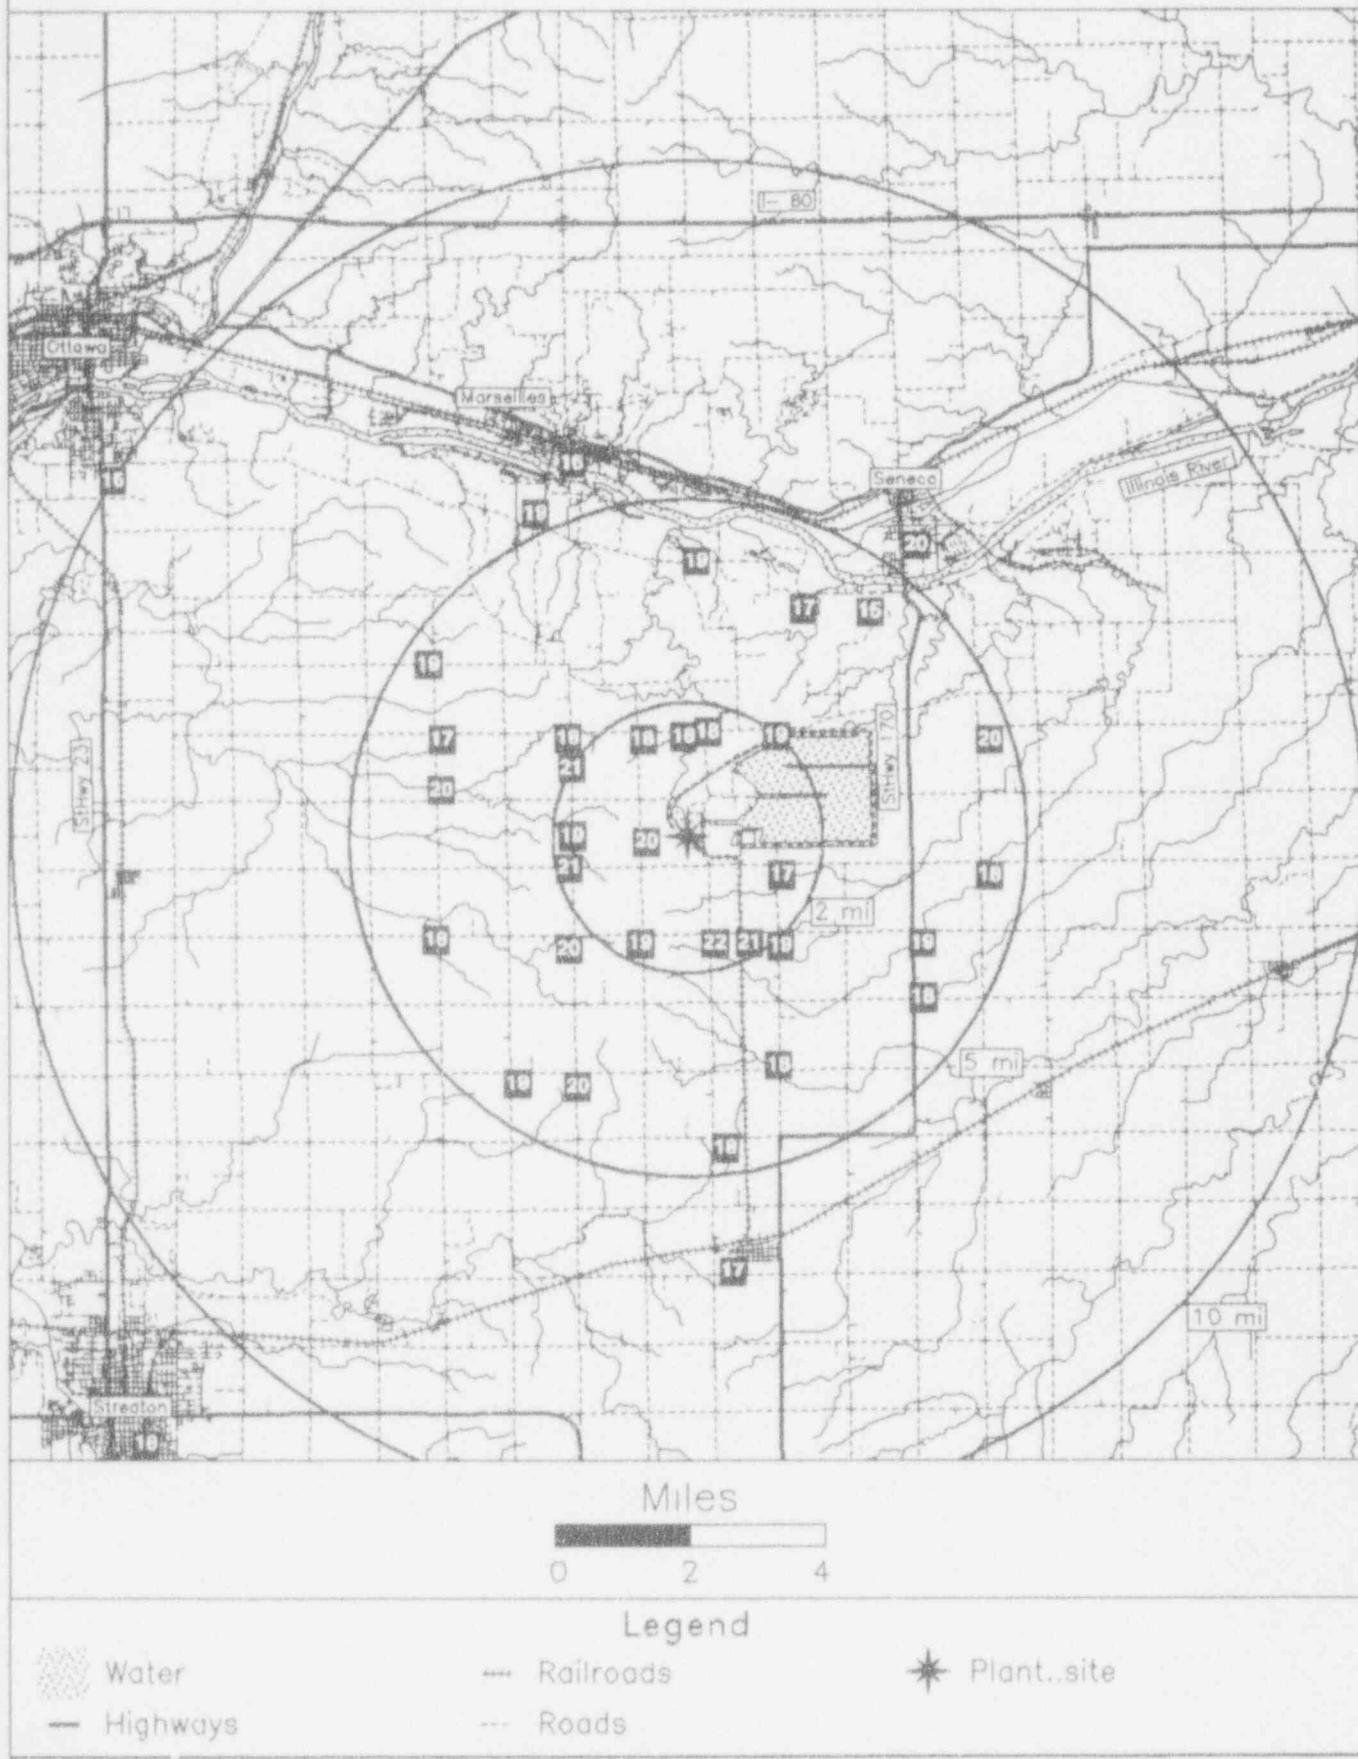

LIMERICK

TLD Direct Radiation Environmental Monitoring
 For the period 930915-940127 135 Days
 Field Time: 92 Days

NRC Sta	Location	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	115	8.5 26.7 +- 0.8; 4.0	22.9 +- 0.8; 4.9	23.1 +- 1.8
3	85	3.7 22.0 +- 0.7; 3.3	18.3 +- 0.7; 4.3	19.1 +- 1.4
4	46	3.3 23.1 +- 0.7; 3.5	19.4 +- 0.7; 4.4	19.7 +- 1.6
5	20	3.7 23.2 +- 0.7; 3.5	19.5 +- 0.8; 4.5	19.6 +- 1.6
6	7	4.6 23.0 +- 0.7; 3.4	19.3 +- 0.7; 4.4	20.5 +- 1.5
7	340	7.2 21.1 +- 0.6; 3.2	17.4 +- 0.7; 4.2	18.2 +- 1.9
8	332	4.0 22.4 +- 0.7; 3.4	18.7 +- 0.7; 4.4	19.2 +- 1.5
9	313	3.4 22.8 +- 0.7; 3.4	19.1 +- 0.7; 4.4	19.4 +- 1.7
10	291	4.9 23.4 +- 0.7; 3.5	19.7 +- 0.8; 4.5	20.8 +- 1.7
11	304	3.0 28.0 +- 0.8; 4.2	24.2 +- 0.9; 5.0	24.6 +- 1.7
12	316	1.9 21.6 +- 0.6; 3.2	17.9 +- 0.7; 4.3	18.4 +- 1.6
13	347	1.9 23.7 +- 0.7; 3.6	19.9 +- 0.8; 4.5	20.6 +- 1.6
14	339	1.5 20.9 +- 0.6; 3.1	17.3 +- 0.7; 4.2	17.5 +- 1.4
15	41	1.7 21.4 +- 0.6; 3.2	17.7 +- 0.7; 4.3	18.6 +- 1.6
16	66	2.6 21.1 +- 0.6; 3.2	17.4 +- 0.7; 4.2	19.6 +- 1.6
17	5	0.6 20.7 +- 0.6; 3.1	17.0 +- 0.7; 4.2	18.8 +- 1.8
18	300	0.7 23.5 +- 0.7; 3.5	19.7 +- 0.8; 4.5	18.9 +- 1.9
19	291	0.7 21.5 +- 0.6; 3.2	17.8 +- 0.7; 4.3	18.6 +- 1.7
20	260	0.7 21.6 +- 0.6; 3.2	17.9 +- 0.7; 4.3	18.2 +- 1.6
21	234	0.9 21.6 +- 0.6; 3.2	17.9 +- 0.7; 4.3	18.5 +- 1.7
22	210	1.1 22.5 +- 0.7; 3.4	18.8 +- 0.7; 4.4	19.2 +- 1.4
23	174	1.7 21.1 +- 0.6; 3.2	17.4 +- 0.7; 4.2	17.2 +- 1.4
24	149	1.5 22.0 +- 0.7; 3.3	18.3 +- 0.7; 4.3	17.6 +- 1.7
25	124	1.0 23.1 +- 0.7; 3.5	19.4 +- 0.7; 4.4	19.9 +- 1.6
26	114	1.1 22.2 +- 0.7; 3.3	18.5 +- 0.7; 4.3	20.2 +- 1.7
27	160	1.0 22.5 +- 0.7; 3.4	18.8 +- 0.7; 4.4	19.2 +- 1.5
28	81	1.0 21.5 +- 0.6; 3.2	17.8 +- 0.7; 4.3	18.7 +- 1.8
29	51	0.7 22.9 +- 0.7; 3.4	19.2 +- 0.7; 4.4	19.1 +- 1.6
30	144	3.2 25.6 +- 0.8; 3.8	21.8 +- 0.8; 4.7	22.5 +- 1.8
31	158	2.6 21.9 +- 0.7; 3.3	18.2 +- 0.7; 4.3	19.3 +- 2.2
32	153	7.3 21.7 +- 0.7; 3.3	18.1 +- 0.7; 4.3	17.9 +- 1.6
33	186	4.2 21.0 +- 0.6; 3.1	17.3 +- 0.7; 4.2	17.1 +- 1.7
34	194	3.8 19.7 +- 0.6; 3.0	16.1 +- 0.7; 4.1	17.2 +- 1.6
35	229	5.1 23.0 +- 0.7; 3.4	19.3 +- 0.7; 4.4	18.9 +- 1.6
36	251	4.1 24.7 +- 0.7; 3.7	21.0 +- 0.8; 4.6	19.1 +- 1.9
37	270	3.0 19.9 +- 0.6; 3.0	16.2 +- 0.7; 4.1	15.9 +- 1.6
38	293	11.9 23.8 +- 0.7; 3.6	20.1 +- 0.8; 4.5	20.5 +- 2.0
39	293	11.9 23.9 +- 0.7; 3.6	20.1 +- 0.8; 4.5	20.5 +- 1.8
40	293	11.9 24.2 +- 0.7; 3.6	20.5 +- 0.8; 4.6	21.0 +- 1.7
41	126	2.9 20.1 +- 0.6; 3.0	16.4 +- 0.7; 4.1	16.2 +- 1.7
42	111	4.3 22.6 +- 0.7; 3.4	18.9 +- 0.7; 4.4	19.1 +- 1.8

Transit Dose = 3.3 +- 0.3; 2.9

LIMERICK
For the period 930915-940127

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	18.1 +- 1.6	2
11.26 - 33.75 NNE	19.5 +- 0.0	1
33.76 - 56.25 NE	18.8 +- 0.9	3
56.26 - 78.75 ENE	17.4 +- 0.0	1
78.76 - 101.25 E	18.1 +- 0.4	2
101.26 - 123.75 ESE	20.1 +- 2.5	3
123.76 - 146.25 SE	19.2 +- 2.7	3
146.26 - 168.75 SSE	18.3 +- 0.3	4
168.76 - 191.25 S	17.3 +- 0.1	2
191.26 - 213.75 SSW	17.5 +- 2.0	2
213.76 - 236.25 SW	18.6 +- 1.0	2
236.26 - 258.75 WSW	21.0 +- 0.0	1
258.76 - 281.25 W	17.1 +- 1.2	2
281.26 - 303.75 WNW	19.1 +- 1.1	3
303.76 - 326.25 NW	20.4 +- 3.3	3
326.26 - 348.75 NNW	18.3 +- 1.2	4

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	18.3 +- 0.9	17
2 - 5	18.9 +- 2.1	17
> 5	19.4 +- 2.5	4
Upwind Control	20.2 +- 0.2	3

LIMERICK
 TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Degree /	Distance / Mile	Description
1	115	8.5	YERKES ROAD
3	85	3.7	ARROW CAMERA SHOP
4	46	3.3	HOFFMAN NURSERY
5	20	3.7	SWAMP PIKE & FAUST ROAD
6	7	4.6	SWAMP PIKE & ROMIG ROAD
7	340	7.2	SOUTH MADISON STREET
8	332	4.0	SMITH RESIDENCE
9	313	3.4	NORTH END FIRE CO.
10	291	4.9	PRINCE STREET
11	304	3.0	LINCOLN SUBSTATION
12	316	1.9	POTTSTOWN MEDICAL CTR.
13	347	1.9	POTTS GROVE ELEM. SCH.
14	339	1.5	SANATOGA FIRE CO.
15	41	1.7	SAWCHUCK'S GARAGE
16	66	2.6	LIMERICK TWP. MUNICIPAL BLDG.
17	5	0.6	SANATOGA & EVERGREEN RDS.
18	300	0.7	GOWEN RESIDENCE
19	291	0.7	SANATOGA RD. R.R. TRACKS
20	260	0.7	EASTERN WAREHOUSES
21	234	0.9	SANATOGA ROAD
22	210	1.1	WUNDERLICH'S GARAGE
23	174	1.7	PA724 & LINFIELD ROAD
24	149	1.5	MINI MART
25	124	1.0	LIMERICK CENTER ROAD
26	114	1.1	BROWNBACK ROAD
27	160	1.0	LONGVIEW ROAD
28	81	1.0	EVANS CREEK
29	51	0.7	BESSE BELLE FARM
30	144	3.2	PENN HURST SCHOOL ENTRANCE
31	158	2.6	PENN HURST RESERVOIR
32	153	7.3	WHEATLAND SUBSTATION
33	186	4.2	SEVEN STARS INN
34	194	3.8	RIDGE FIRE COMPANY
35	229	5.1	RIDGE RESTAURANT
36	251	4.1	DRIVING RANGE
37	270	3.0	CEDARVILLE ROAD
38	293	11.9	DANIEL BOONE HOMESTEAD
39	293	11.9	DANIEL BOONE HOMESTEAD
40	293	11.9	DANIEL BOONE HOMESTEAD
41	126	2.9	STECKEL RESIDENCE
42	111	4.3	MINGO CHURCH

NRC TLD DOSES FOR LIMERICK AREA

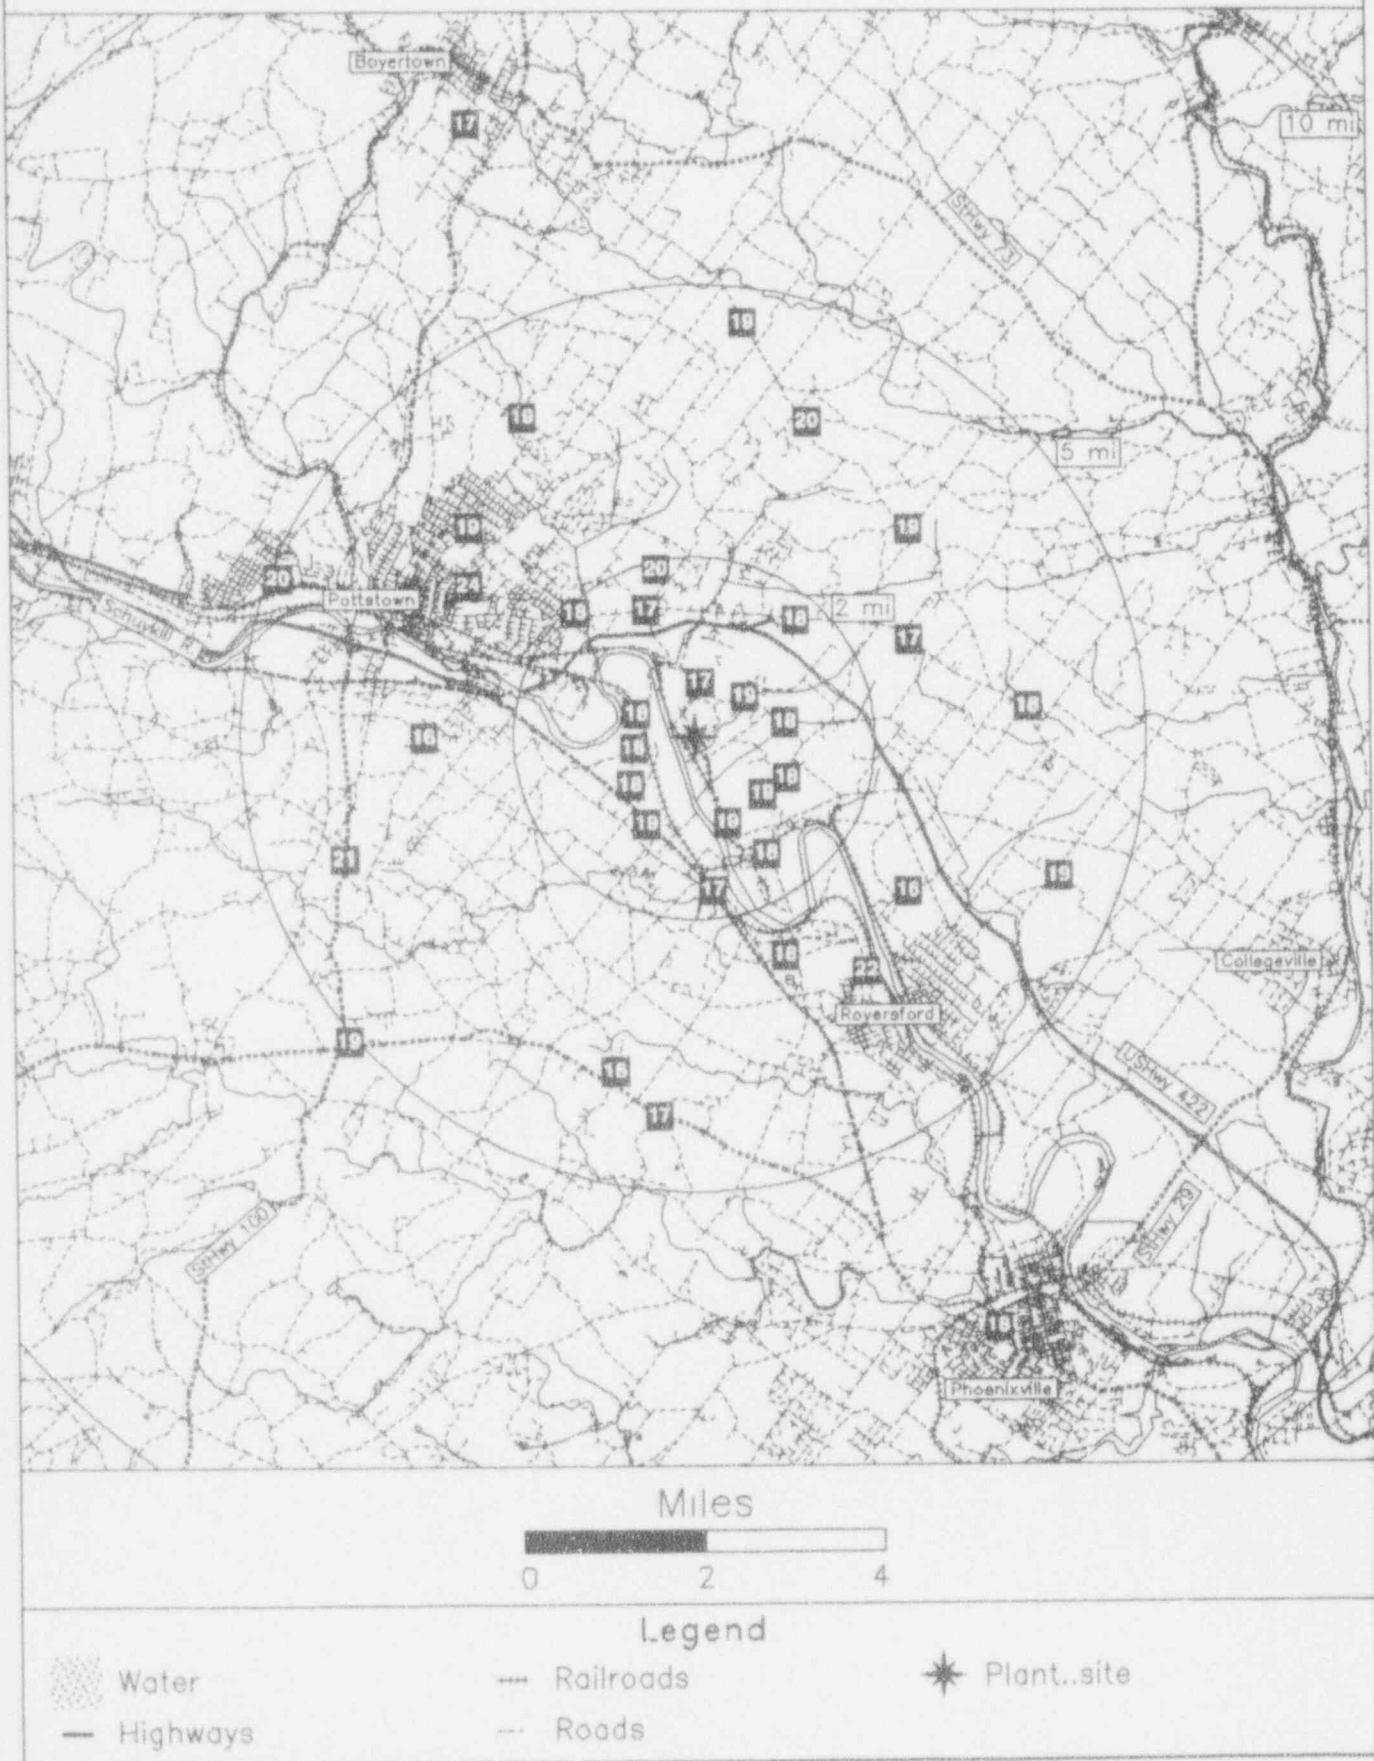

MAINE YANKEE

TLD Direct Radiation Environmental Monitoring
 For the period 930915-940215 154 Days
 Field Time: 99 Days

NRC Sta	Location	Gross Exposure (mR)	Net Exposure Rate (mR/Std. Qtr.)	Hist. Range Net Exp Rate +1 Std Dev
	Azimuth/Dist (Deg)/(Mi)	+Rdm; Tot.	+Rdm; Tot.	+1 Std Dev
1	340	1.0	27.3 +- 0.8; 4.1	21.3 +- 0.8; 4.7
2	6	1.4	25.9 +- 0.8; 3.9	20.0 +- 0.8; 4.6
3	23	1.5	25.2 +- 0.8; 3.8	19.4 +- 0.8; 4.5
4	44	1.8	24.5 +- 0.7; 3.7	18.8 +- 0.7; 4.4
5	116	0.5	24.5 +- 0.7; 3.7	18.8 +- 0.7; 4.4
6	168	1.0	27.0 +- 0.8; 4.0	21.0 +- 0.8; 4.7
7	185	1.6	25.7 +- 0.8; 3.9	19.9 +- 0.8; 4.5
8	195	2.3	26.6 +- 0.8; 4.0	20.7 +- 0.8; 4.6
9	209	3.8	26.3 +- 0.8; 3.9	20.4 +- 0.8; 4.6
10	310	1.7	25.4 +- 0.8; 3.8	19.5 +- 0.8; 4.5
11	290	1.8	29.1 +- 0.9; 4.4	22.9 +- 0.9; 4.9
12	275	1.7	28.0 +- 0.8; 4.2	22.0 +- 0.8; 4.8
13	256	1.9	27.1 +- 0.8; 4.1	21.1 +- 0.8; 4.7
14	232	2.5	27.9 +- 0.8; 4.2	21.8 +- 0.8; 4.8
15	227	5.3	28.1 +- 0.8; 4.2	22.0 +- 0.8; 4.8
16	246	4.4	29.1 +- 0.9; 4.4	22.9 +- 0.9; 4.9
17	250	6.6	33.0 +- 1.0; 5.0	26.5 +- 1.0; 5.4
18	268	4.7	27.9 +- 0.8; 4.2	21.9 +- 0.8; 4.8
19	283	4.4	26.8 +- 0.8; 4.0	20.8 +- 0.8; 4.7
20	305	4.7	25.5 +- 0.8; 3.8	19.7 +- 0.8; 4.5
21	300	2.9	25.8 +- 0.8; 3.9	19.9 +- 0.8; 4.6
22	332	2.7	26.9 +- 0.8; 4.0	20.9 +- 0.8; 4.7
23	20	3.9	28.3 +- 0.8; 4.2	22.2 +- 0.8; 4.8
24	23	3.0	27.4 +- 0.8; 4.1	21.4 +- 0.8; 4.7
25	42	4.7	28.3 +- 0.8; 4.2	22.2 +- 0.8; 4.8
26	60	15.0	26.2 +- 0.8; 3.9	20.3 +- 0.8; 4.6
27	62	16.0	19.5 +- 0.6; 2.9	14.2 +- 0.6; 3.9
28	63	16.0	25.8 +- 0.8; 3.9	19.9 +- 0.8; 4.6
29	64	2.1	28.5 +- 0.9; 4.3	22.4 +- 0.8; 4.8
30	84	1.5	23.9 +- 0.7; 3.6	18.2 +- 0.7; 4.4
31	115	1.6	23.2 +- 0.7; 3.5	17.6 +- 0.7; 4.3
32	135	2.0	23.7 +- 0.7; 3.6	18.0 +- 0.7; 4.3
33	66	3.5	26.3 +- 0.8; 3.9	20.3 +- 0.8; 4.6
34	97	4.9	27.1 +- 0.8; 4.1	21.1 +- 0.8; 4.7
35	123	4.8	27.9 +- 0.8; 4.2	21.8 +- 0.8; 4.8
36	140	4.9	25.1 +- 0.8; 3.8	19.3 +- 0.8; 4.5
37	151	6.0	28.0 +- 0.8; 4.2	21.9 +- 0.8; 4.8
38	152	4.2	28.2 +- 0.8; 4.2	22.1 +- 0.8; 4.8
39	172	4.9	26.6 +- 0.8; 4.0	20.6 +- 0.8; 4.6
40	156	7.4	25.1 +- 0.8; 3.8	19.3 +- 0.8; 4.5

Transit Dose = 3.9 +- 0.4; 3.2

MAINE YANKEE

For the period 930915-940215

TLD Direct Radiation Environmental Monitoring

Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	20.0 +- 0.0	1
11.26 - 33.75 NNE	21.0 +- 1.5	3
33.76 - 56.25 NE	20.5 +- 2.4	2
56.26 - 78.75 ENE	21.4 +- 1.5	2
78.76 - 101.25 E	19.6 +- 2.1	2
101.26 - 123.75 ESE	19.4 +- 2.2	3
123.76 - 146.25 SE	18.7 +- 0.9	2
146.26 - 168.75 SSE	21.1 +- 1.3	4
168.76 - 191.25 S	20.2 +- 0.5	2
191.26 - 213.75 SSW	20.5 +- 0.2	2
213.76 - 236.25 SW	21.9 +- 0.1	2
236.26 - 258.75 WSW	23.5 +- 2.7	3
258.76 - 281.25 W	21.9 +- 0.1	2
281.26 - 303.75 WNW	21.2 +- 1.5	3
303.76 - 326.25 NW	19.6 +- 0.1	2
326.26 - 348.75 NNW	21.1 +- 0.3	2

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	19.9 +- 1.6	14
2 - 5	21.2 +- 1.0	19
> 5	22.4 +- 3.0	4
Upwind Control	18.1 +- 3.4	3


MAINE YANKEE
TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	340	ACCESS RD. & RT. 144
2	6	RT. 144
3	23	RT. 144
4	44	OLD RT. 144 & RT. 144
5	116	RT. 144
6	168	WEST PORT VOLUNTEER
7	185	RT. 144
8	195	BAY SHORE RD.
9	209	HARRISON'S TRAILER
10	310	MONTSWEAG BROOK
11	290	RT. 1 & MONTSWEAG RD.
12	275	MONTSWEAG RD.
13	256	MONTSWEAG RD.
14	232	MURPHY'S CORNER
15	227	HOCKOMOCK RD.
16	246	MURPHY'S CORNER RD.
17	250	BATH FIRE STATION
18	268	RT. 127
19	283	RT. 127 & OLD STAGE RD.
20	305	RT. 127 & DANA HILL RD.
21	300	OLD STAGE RD. & MEADOW RD.
22	332	OLD STAGE RD.
23	20	WISCASSET COURT HOUSE
24	23	MASON STATION
25	42	RT. 1 & RT. 27
26	60	UWC (WALDOBORO)
27	62	UWC (WALDOBORO)
28	63	UWC (WALDOBORO)
29	64	CROSS POINT RD.
30	84	CROSS POINT RD.
31	115	CROSS POINT RD. & MILL RD.
32	135	CROSS POINT RD.
33	66	EDGECOMB FIRE CO.
34	97	RIVER RD.
35	123	RIVER RD. & RT. 27
36	140	ADAMS POND RD. & DOVER RD.
37	151	INT. OF RT 27 (BACK RIVER RD) & CORREY LN
38	152	BACK RIVER RD. & GRAY RD.
39	172	BARTERS ISLAND
40	156	BOOTHBAY FIRE STATION

NRC TLD DOSES FOR MAINE YANKEE AREA



Miles



Legend

Water
— Highways

--- Railroads
-- Roads

* Plant..site

MC GUIRE

TLD Direct Radiation Environmental Monitoring
 For the period 930914-940201 141 Days
 Field Time: 92 Days

NRC Sta	Location		Gross Exposure (mR)			Net Exposure Rate (mR/Std. Qtr.)			Hist. Range Net Exp Rate +-1 Std Dev		
	Azimuth/Dist (Deg)/(Mi)		+Rdm; Tot.		+Rdm; Tot.		+Rdm; Tot.		+Rdm; Tot.		+Rdm; Tot.
1	97	0.5	18.6	+-	0.6; 2.8	12.1	+-	0.7; 4.2	14.5	+-	2.8
2	323	1.6	22.3	+-	0.7; 3.4	15.7	+-	0.8; 4.5	16.9	+-	2.5
3	336	1.7	23.0	+-	0.7; 3.4	16.3	+-	0.8; 4.6	18.1	+-	2.8
4	303	2.9	20.3	+-	0.6; 3.0	13.7	+-	0.7; 4.3	16.5	+-	3.5
5	321	3.9	21.0	+-	0.6; 3.2	14.4	+-	0.7; 4.4	16.5	+-	2.7
6	334	3.7	20.1	+-	0.6; 3.0	13.5	+-	0.7; 4.3	16.4	+-	2.9
7	352	3.5	17.0	+-	0.5; 2.5	10.4	+-	0.6; 4.0	14.9	+-	2.5
8	287	2.0	25.2	+-	0.8; 3.8	18.5	+-	0.8; 4.8	17.5	+-	3.4
9	273	1.9	16.8	+-	0.5; 2.5	10.3	+-	0.6; 4.0	16.1	+-	3.4
10	244	1.7	18.4	+-	0.6; 2.8	11.9	+-	0.7; 4.1	15.1	+-	2.6
11	225	2.1	16.5	+-	0.5; 2.5	10.0	+-	0.6; 4.0	14.7	+-	2.4
12	212	3.6	20.9	+-	0.6; 3.1	14.3	+-	0.7; 4.4	16.4	+-	2.6
13	232	4.4	26.4	+-	0.8; 4.0	19.6	+-	0.9; 5.0	22.0	+-	2.7
14	253	3.7	23.8	+-	0.7; 3.6	17.1	+-	0.8; 4.7	19.2	+-	3.0
15	261	4.2	19.1	+-	0.6; 2.9	12.6	+-	0.7; 4.2	15.0	+-	2.5
16	288	4.3	27.0	+-	0.8; 4.1	20.3	+-	0.9; 5.1	22.1	+-	2.7
17	288	17.0	29.4	+-	0.9; 4.4	22.6	+-	1.0; 5.3	23.8	+-	6.3
18	287	2.0	23.9	+-	0.7; 3.6	17.3	+-	0.8; 4.7	21.1	+-	3.1
19	286	17.0	23.1	+-	0.7; 3.5	16.4	+-	0.8; 4.6	22.3	+-	3.5
20	233	18.0	24.8	+-	0.7; 3.7	18.1	+-	0.8; 4.8	21.7	+-	2.8
21	204	10.0	20.3	+-	0.6; 3.0	13.7	+-	0.7; 4.3	16.1	+-	2.7
22	239	9.5	20.5	+-	0.6; 3.1	13.9	+-	0.7; 4.3	17.4	+-	2.8
23	115	4.9	16.1	+-	0.5; 2.4	9.6	+-	0.6; 3.9	13.7	+-	2.7
24	132	4.9	17.2	+-	0.5; 2.6	10.7	+-	0.6; 4.0	14.0	+-	2.6
25	156	4.0	15.5	+-	0.5; 2.3	9.0	+-	0.6; 3.9	11.9	+-	2.5
26	175	3.7	17.7	+-	0.5; 2.7	11.2	+-	0.7; 4.1	14.0	+-	2.6
27	198	4.3	24.6	+-	0.7; 3.7	18.0	+-	0.8; 4.8	19.3	+-	3.1
28	169	13.0	16.9	+-	0.5; 2.5	10.4	+-	0.6; 4.0	14.7	+-	2.8
29	155	13.0	18.6	+-	0.6; 2.8	12.1	+-	0.7; 4.2	14.3	+-	2.4
30	146	14.0	17.7	+-	0.5; 2.6	11.1	+-	0.7; 4.1	13.4	+-	2.5
31	143	1.9	15.9	+-	0.5; 2.4	9.4	+-	0.6; 3.9	14.2	+-	2.9
32	155	1.3	19.1	+-	0.6; 2.9	12.5	+-	0.7; 4.2	14.7	+-	2.4
33	178	1.6	16.4	+-	0.5; 2.5	9.9	+-	0.6; 4.0	13.2	+-	2.3
34	108	2.0	18.7	+-	0.6; 2.8	12.2	+-	0.7; 4.2	15.0	+-	2.6
35	93	2.2	Damaged Dosimeter			No Net Data			14.6	+-	2.9
36	68	2.5	18.8	+-	0.6; 2.8	12.3	+-	0.7; 4.2	14.8	+-	2.6
37	82	4.7	17.7	+-	0.5; 2.7	11.2	+-	0.7; 4.1	14.5	+-	2.4
38	64	4.9	17.4	+-	0.5; 2.6	10.9	+-	0.7; 4.0	14.8	+-	2.3
39	42	5.0	19.8	+-	0.6; 3.0	13.2	+-	0.7; 4.3	18.4	+-	2.5
40	26	4.3	17.4	+-	0.5; 2.6	10.9	+-	0.7; 4.0	15.2	+-	2.8
41	42	2.0	16.9	+-	0.5; 2.5	10.4	+-	0.6; 4.0	12.8	+-	2.4
42	21	1.6	20.0	+-	0.6; 3.0	13.4	+-	0.7; 4.3	17.0	+-	2.8
43	8	2.6	22.3	+-	0.7; 3.3	15.7	+-	0.8; 4.5	18.1	+-	2.6
44	37	13.0	24.5	+-	0.7; 3.7	17.8	+-	0.8; 4.8	21.6	+-	3.0
45	78	19.0	27.7	+-	0.8; 4.2	20.9	+-	0.9; 5.1	24.0	+-	3.1
46	94	19.0	20.6	+-	0.6; 3.1	14.0	+-	0.7; 4.4	18.1	+-	2.2

Transit Dose = 6.3 +- 0.4; 3.2

MCGUIRE

For the period 930914-940201

TLD Direct Radiation Environmental Monitoring

Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	13.1 +- 3.7	2
11.26 - 33.75 NNE	12.2 +- 1.8	2
33.76 - 56.25 NE	13.8 +- 3.7	3
56.26 - 78.75 ENE	14.7 +- 5.4	3
78.76 - 101.25 E	12.4 +- 1.5	3
101.26 - 123.75 ESE	10.9 +- 1.8	2
123.76 - 146.25 SE	10.4 +- 0.9	3
146.26 - 168.75 SSE	11.2 +- 1.9	3
168.76 - 191.25 S	10.5 +- 0.6	3
191.26 - 213.75 SSW	15.3 +- 2.3	3
213.76 - 236.25 SW	15.9 +- 5.2	3
236.26 - 258.75 WSW	14.3 +- 2.7	3
258.76 - 281.25 W	11.4 +- 1.6	2
281.26 - 303.75 WNW	17.5 +- 3.4	3
303.76 - 326.25 NW	15.1 +- 0.9	2
326.26 - 348.75 NNW	14.9 +- 2.0	2


Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	12.7 +- 2.8	12
2 - 5	13.3 +- 3.3	21
> 5	14.7 +- 3.5	9
Upwind Control	18.8 +- 3.4	3

MC GUIRE

TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	97	SITE RD. (S. OF ENVIR. LAB.)
2	323	RT. 1395 (1.6 MILES N. OF RT. 73)
3	336	RT. 1393 (0.4 MILES E. OF RT. 1395)
4	303	DELMAR STUDIOS
5	321	ACROSS FROM E.LINCOLN ANIMAL HOSP
6	334	OLD EBENEZER CH.
7	352	HOLIDAY LAND FAMILY CAMPING RESORT
8	287	RT. 73 (0.1 MILES E. OF RT. 1396)
9	273	MARTHA'S CHAPEL(REAR OF LOT)
10	244	RT. 1396 (0.2 MILES S. OF RT. 1397)
11	225	RT. 1396 AT RAILROAD TRACKS
12	212	RT. 1396 NEAR JOHNSON CR.
13	232	CASTANEA CH.
14	253	LOWESVILLE SQUARE (NCNB)
15	261	0.7 MILES W. OF RT. 16 & HILLS CH.
16	288	LINCOLN HIGH SCHOOL
17	288	RT. 321 & RT. 1281
18	287	RT. 73 (0.1 MILES E.)
19	286	MCKENDREE CH.
20	233	GASTONIA (MCDONALDS)
21	204	MT. HOLLY SCH.
22	239	CRONLANDS HARDWARE (STANLEY)
23	115	RT. 2138 (0.1 MILES)
24	132	RT. 2138 & RT. 2117
25	156	RT. 2074 & RT. 2128
26	175	MCDOWELL CR.
27	198	END OF RT. 2074
28	169	BROWNS AVE. (CHARLOTTE)
29	155	BEATTIES FORD RD. (CHARLOTTE)
30	146	GRAHAM ST. (CHARLOTTE)
31	143	UNION GROVE CH.
32	155	RT. 2133 (0.9 MILES W. OF RT. 2128)
33	178	RT. 2133 (1.5 MILES W. OF RT. 2128)
34	108	GILEAD VOLUNTEER FIRE DEPT.
35	93	RT. 73 & TERRY LANE
36	68	NORMAN ISLAND DR.
37	82	RT. 21 & RT. 2145
38	64	RT. 21 & RT. 2147
39	42	ANCHORAGE SHIPYARD
40	26	BETHEL CH. RD. & STAGHORN CT.
41	42	RT. 2149 (1.1 MILES S. OF RT. 2151)
42	21	MOLLYPOP LANE
43	8	JETTON RD. & CASUAL CAY RD.
44	37	MOORESVILLE RAILROAD CROSSING
45	78	N. KANNAPOLIS METHODIST CH.
46	94	CONCORD

NRC TLD DOSES FOR McGuIRE AREA

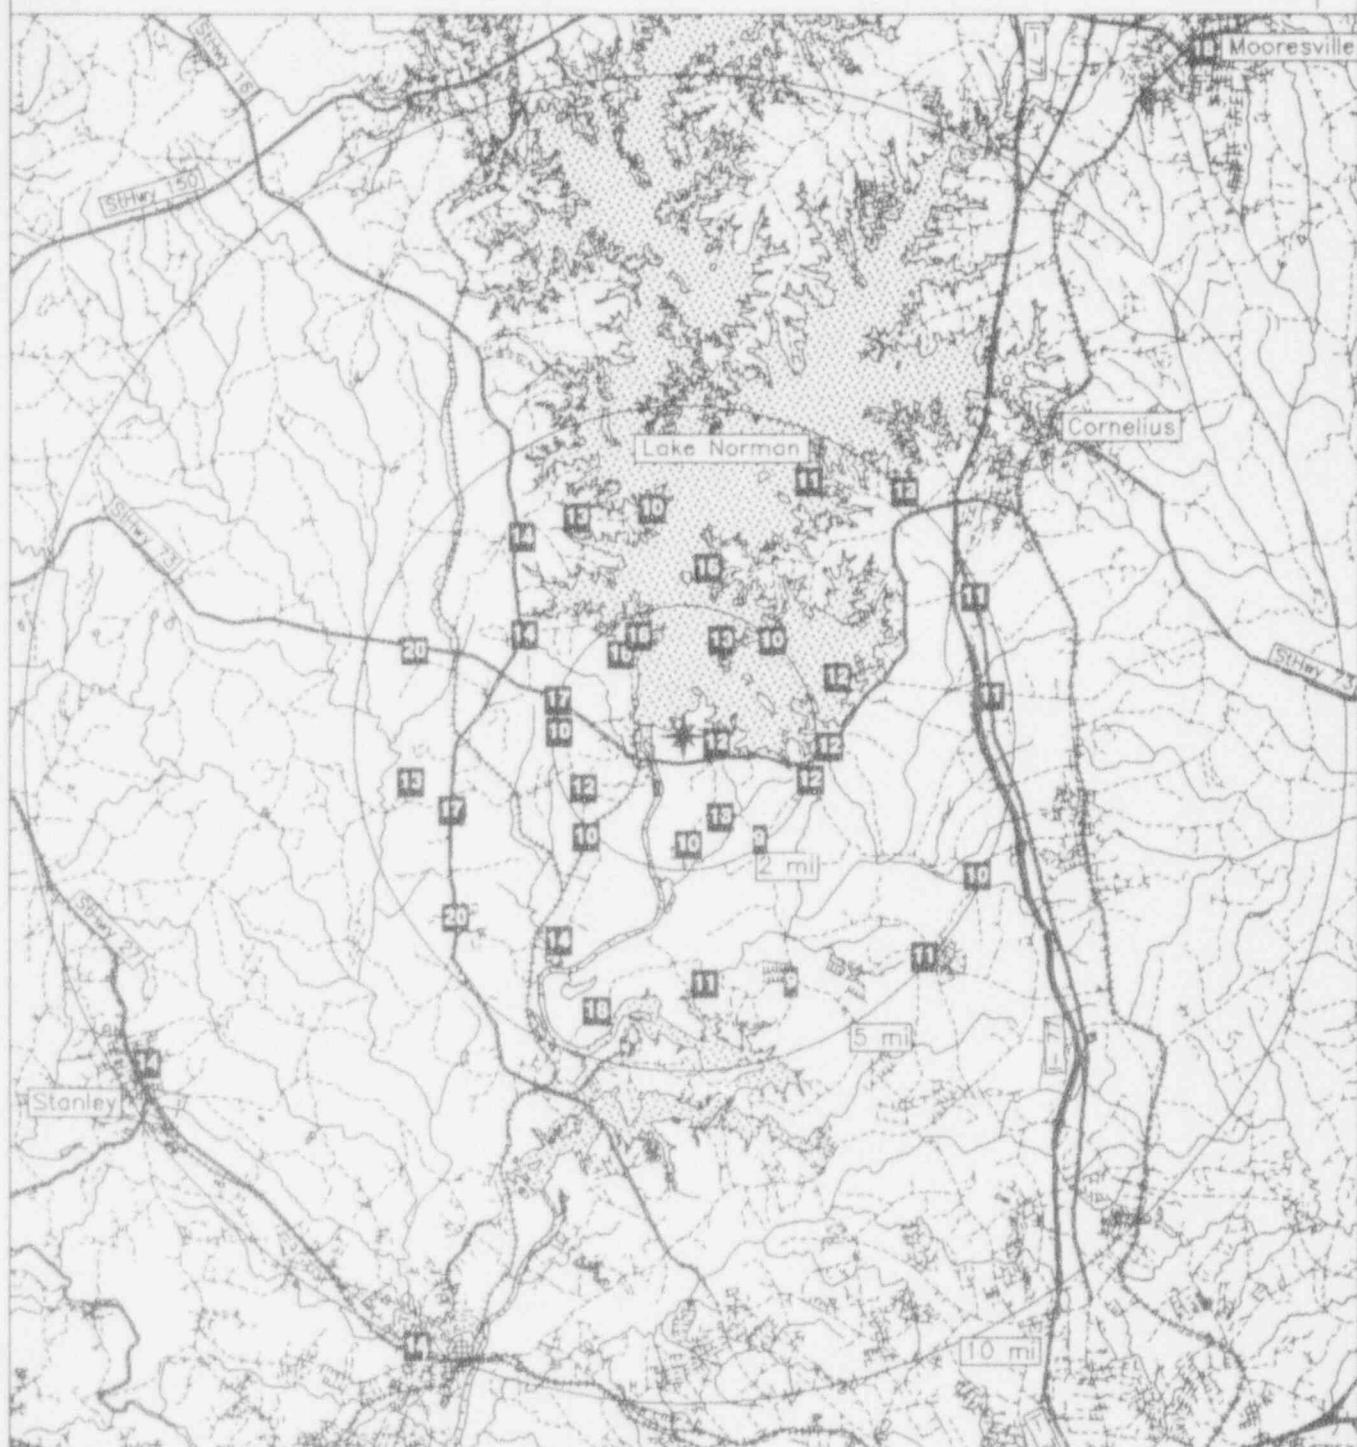

Miles

0 2 4

Legend

- Water
- Highways

- - - Railroads
- · - Roads

- ★ Plant..site

MILLSTONE
 TLD Direct Radiation Environmental Monitoring
 For the period 930915-940201 140 Days
 Field Time: 99 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	0	1.0	24.2 +- 0.7; 3.6	19.4 +- 0.7; 4.3
2	24	1.3	18.9 +- 0.6; 2.8	14.6 +- 0.6; 3.8
3	47	1.5	24.9 +- 0.7; 3.7	20.0 +- 0.7; 4.4
4	60	1.7	24.0 +- 0.7; 3.6	19.2 +- 0.7; 4.3
5	85	1.3	23.8 +- 0.7; 3.6	19.0 +- 0.7; 4.3
6	110	1.8	23.8 +- 0.7; 3.6	19.0 +- 0.7; 4.3
7	67	5.3	24.2 +- 0.7; 3.6	19.4 +- 0.7; 4.3
8	49	5.3	26.0 +- 0.8; 3.9	21.1 +- 0.8; 4.5
9	84	5.2	22.2 +- 0.7; 3.3	17.6 +- 0.7; 4.1
11	232	2.5	22.2 +- 0.7; 3.3	17.6 +- 0.7; 4.1
12	256	2.4	26.1 +- 0.8; 3.9	21.2 +- 0.8; 4.5
13	274	2.2	25.3 +- 0.8; 3.8	20.4 +- 0.8; 4.5
14	295	1.9	27.5 +- 0.8; 4.1	22.4 +- 0.8; 4.7
15	315	1.5	20.3 +- 0.6; 3.0	15.9 +- 0.6; 4.0
16	339	1.2	24.6 +- 0.7; 3.7	19.8 +- 0.7; 4.4
17	353	3.5	24.1 +- 0.7; 3.6	19.3 +- 0.7; 4.3
18	24	3.5	24.3 +- 0.7; 3.6	19.5 +- 0.7; 4.4
19	33	3.0	27.0 +- 0.8; 4.0	21.9 +- 0.8; 4.6
20	82	4.0	23.1 +- 0.7; 3.5	18.4 +- 0.7; 4.2
22	59	3.7	25.3 +- 0.8; 3.8	20.4 +- 0.8; 4.5
28	257	5.8	25.5 +- 0.8; 3.8	20.6 +- 0.8; 4.5
29	272	3.7	28.1 +- 0.8; 4.2	22.9 +- 0.8; 4.8
30	295	3.5	27.3 +- 0.8; 4.1	22.2 +- 0.8; 4.7
31	317	3.6	23.4 +- 0.7; 3.5	18.7 +- 0.7; 4.3
32	327	4.3	27.2 +- 0.8; 4.1	22.1 +- 0.8; 4.7
33	41	4.7	24.9 +- 0.7; 3.7	20.0 +- 0.7; 4.4
34	54	5.5	26.1 +- 0.8; 3.9	21.1 +- 0.8; 4.5
37	354	6.8	24.5 +- 0.7; 3.7	19.7 +- 0.7; 4.4
39	1	5.7	23.8 +- 0.7; 3.6	19.0 +- 0.7; 4.3
40	278	8.7	21.3 +- 0.6; 3.2	16.7 +- 0.7; 4.0
41	34	11.0	29.8 +- 0.9; 4.5	24.5 +- 0.9; 4.9
42	84	8.0	24.0 +- 0.7; 3.6	19.2 +- 0.7; 4.3
46	41	0.6	23.3 +- 0.7; 3.5	18.6 +- 0.7; 4.2
48	4	40.0	28.8 +- 0.9; 4.3	23.6 +- 0.8; 4.8
49	4	40.0	29.3 +- 0.9; 4.4	24.0 +- 0.9; 4.9

Transit Dose = 2.9 +- 0.3; 3.1

MILLSTONE
For the period 930915-940201

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	19.4 +- 0.3	4
11.25 - 33.75 NNE	18.7 +- 3.7	3
33.76 - 56.25 NE	20.9 +- 2.0	6
56.26 - 78.75 ENE	19.7 +- 0.6	3
78.76 - 101.25 E	18.5 +- 0.7	4
101.26 - 123.75 ESE	19.0 +- 0.0	1
123.76 - 146.25 SE	No Data +- No Data	0
146.26 - 168.75 SSE	No Data +- No Data	0
168.76 - 191.25 S	No Data +- No Data	0
191.26 - 213.75 SSW	No Data +- No Data	0
213.76 - 236.25 SW	17.6 +- 0.0	1
236.26 - 258.75 WSW	20.9 +- 0.4	2
258.76 - 281.25 W	20.0 +- 3.1	3
281.26 - 303.75 WNW	22.3 +- 0.2	2
303.76 - 326.25 NW	17.3 +- 2.0	2
326.26 - 348.75 NNW	20.9 +- 1.7	2

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	18.8 +- 2.2	10
2 - 5	20.4 +- 1.7	13
> 5	19.9 +- 2.1	10
Upwind Control	23.8 +- 0.3	2

MILLSTONE
TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	0	ALBACORE DRIVE
2	24	GARDNERS WOOD ROAD
3	47	LAMPHERE ROAD
4	60	NEW LONDON COUNTRY CLUB
5	85	PLEASURE BEACH FIRE STATION
6	110	SEASIDE POINT
7	67	EASTERN POINT SCHOOL
8	49	NEW LONDON PIER
9	84	AVERY POINT
11	232	OLD BLACK POINT ROAD
12	256	BILLOW ROAD
13	274	TERRACE ROAD
14	295	COLUMBUS AVENUE
15	315	SMITH AVE.
16	339	HILLYER'S BAIT SHOP
17	353	OSWEGATCHIE FIRE STATION
18	24	FOY PLAIN ROAD
19	33	WATERFORD POLICE DEPT.
20	82	NEW LONDON LIGHT HOUSE
22	59	LAWRENCE HOSPITAL
28	257	POLICE STA.-SOUND VIEW
29	272	GIANTS NECK ROAD
30	295	COREY LN.
31	317	EAST LYME HIGH SCHOOL
32	327	FLANDERS SUB.
33	41	HIGH SCHOOL-NEW LONDON
34	54	FORT GRISWOLD
37	354	KONOMOC RESERVOIR
39	1	WATERFORD MAINTENANCE GARAGE
40	278	OLD LYME SUB.
41	34	STODDARDS WHARF ROAD
42	84	MUMFORD COVE
46	41	GUNSHOT RD-POLE #3735
48	4	ASHFORD/CONN
49	4	ASHFORD/CONN

NRC TLD DOSES FOR MILLSTONE AREA

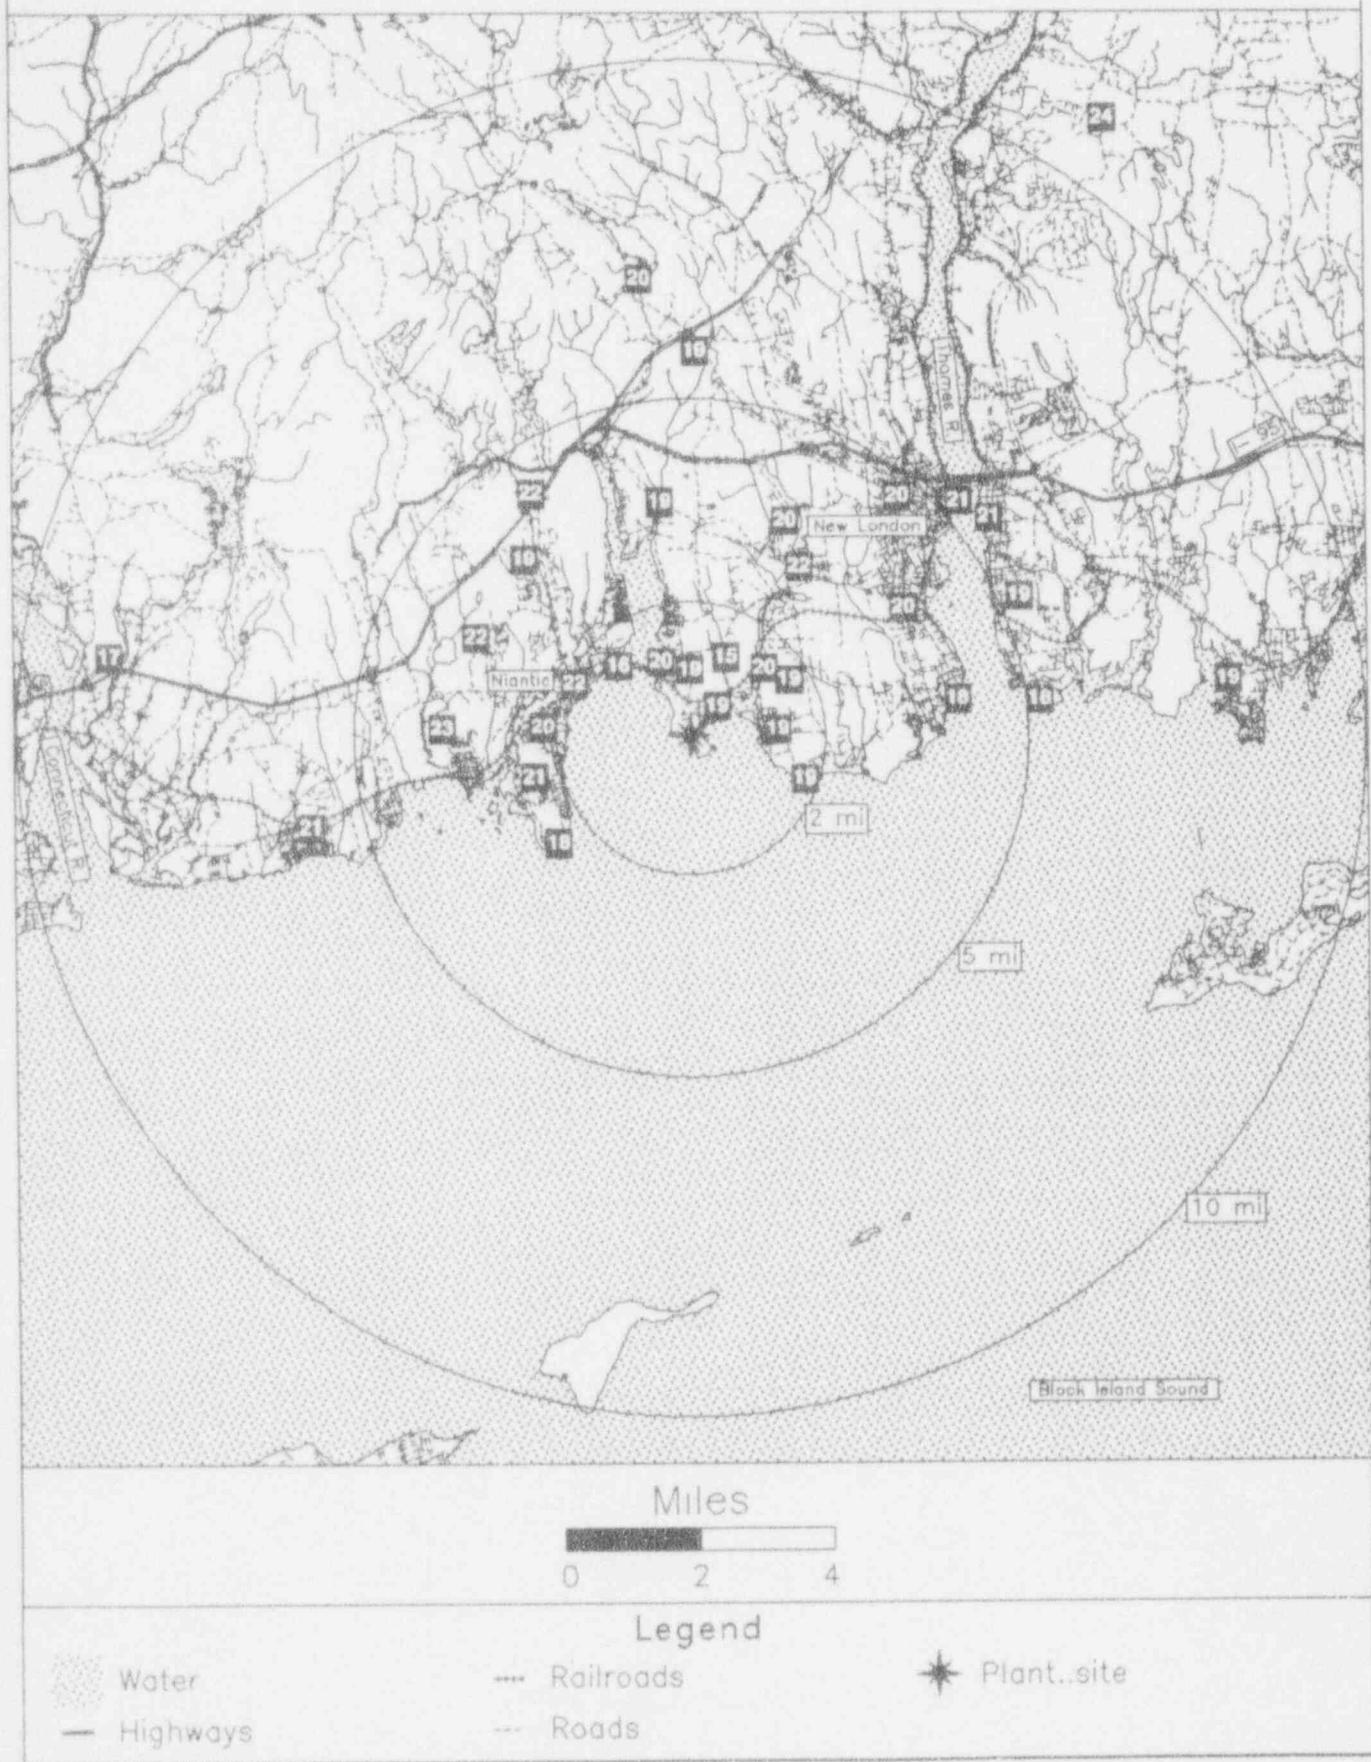

MONTICELLO

TLD Direct Radiation Environmental Monitoring

For the period 930914-940208 148 Days

Field Time: 101 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.		Hist. Range Net Exp Rate +-1 Std Dev
			+-Rdm	Tot.	
1	133	3.6	22.8 +- 0.7;	3.4	16.4 +- 0.7; 4.2
2	163	4.6	23.5 +- 0.7;	3.5	17.0 +- 0.7; 4.3
3	183	4.1	25.1 +- 0.8;	3.8	18.4 +- 0.8; 4.5
4	206	4.3	23.9 +- 0.7;	3.6	17.4 +- 0.7; 4.3
5	230	4.2	26.3 +- 0.8;	3.9	19.5 +- 0.8; 4.6
6	253	4.6	23.5 +- 0.7;	3.5	17.0 +- 0.7; 4.3
7	269	4.4	24.1 +- 0.7;	3.6	17.5 +- 0.7; 4.4
8	286	4.0	24.8 +- 0.7;	3.7	18.2 +- 0.7; 4.4
9	274	1.9	22.5 +- 0.7;	3.4	16.1 +- 0.7; 4.2
10	244	1.3	21.7 +- 0.7;	3.3	15.4 +- 0.7; 4.1
11	226	0.9	24.4 +- 0.7;	3.7	17.8 +- 0.7; 4.4
12	181	1.8	23.2 +- 0.7;	3.5	16.7 +- 0.7; 4.3
13	137	1.7	23.8 +- 0.7;	3.6	17.3 +- 0.7; 4.3
14	155	1.0	23.8 +- 0.7;	3.6	17.3 +- 0.7; 4.3
15	208	0.6	23.2 +- 0.7;	3.5	16.8 +- 0.7; 4.3
16	284	2.0	22.7 +- 0.7;	3.4	16.3 +- 0.7; 4.2
17	113	1.6	23.3 +- 0.7;	3.5	16.8 +- 0.7; 4.3
18	85	1.1	22.8 +- 0.7;	3.4	16.4 +- 0.7; 4.2
19	63	1.2	23.7 +- 0.7;	3.6	17.2 +- 0.7; 4.3
20	37	1.7	22.8 +- 0.7;	3.4	16.4 +- 0.7; 4.2
21	23	0.8	23.1 +- 0.7;	3.5	16.7 +- 0.7; 4.3
22	354	0.7	23.4 +- 0.7;	3.5	16.9 +- 0.7; 4.3
23	338	0.8	23.8 +- 0.7;	3.6	17.3 +- 0.7; 4.3
24	307	1.8	22.8 +- 0.7;	3.4	16.4 +- 0.7; 4.2
25	339	4.1	23.4 +- 0.7;	3.5	16.9 +- 0.7; 4.3
26	320	6.0	22.9 +- 0.7;	3.4	16.4 +- 0.7; 4.2
27	354	4.5	23.4 +- 0.7;	3.5	16.9 +- 0.7; 4.3
28	17	3.7	22.0 +- 0.7;	3.3	15.7 +- 0.7; 4.2
29	50	4.0	21.3 +- 0.6;	3.2	15.1 +- 0.7; 4.1
30	77	3.6	23.6 +- 0.7;	3.5	17.1 +- 0.7; 4.3
31	115	3.3	22.6 +- 0.7;	3.4	16.2 +- 0.7; 4.2
32	90	4.6	20.4 +- 0.6;	3.1	14.2 +- 0.6; 4.0
33	323	16.0	23.2 +- 0.7;	3.5	16.7 +- 0.7; 4.3
34	323	16.0	22.5 +- 0.7;	3.4	16.1 +- 0.7; 4.2
35	323	16.0	23.5 +- 0.7;	3.5	17.0 +- 0.7; 4.3

Transit Dose = 4.4 +- 0.4; 3.3

MONTICELLO
For the period 930914-940208

TLD Direct Radiation Environmental Monitoring

Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	16.9 +- 0.0	2
11.26 - 33.75 NNE	16.2 +- 0.7	2
33.76 - 56.25 NE	15.7 +- 1.0	2
56.26 - 78.75 ENE	17.2 +- 0.0	2
78.76 - 101.25 E	15.3 +- 1.5	2
101.26 - 123.75 ESE	16.5 +- 0.4	2
123.76 - 146.25 SE	16.8 +- 0.6	2
146.26 - 168.75 SSE	17.1 +- 0.2	2
168.76 - 191.25 S	17.6 +- 1.2	2
191.26 - 213.75 SSW	17.1 +- 0.4	2
213.76 - 236.25 SW	18.7 +- 1.2	2
236.26 - 258.75 WSW	16.2 +- 1.1	2
258.76 - 281.25 W	16.8 +- 1.0	2
281.26 - 303.75 WNW	17.2 +- 1.3	2
303.76 - 326.25 NW	16.4 +- 0.0	2
326.26 - 348.75 NNW	17.1 +- 0.3	2


Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	16.7 +- 0.6	16
2 - 5	16.9 +- 1.3	15
> 5	16.4 +- 0.0	1
Upwind Control	16.6 +- 0.4	3

MONTICELLO

TLD Direct Radiation Environmental Monitoring

NRC Station	Location	Azimuth / Distance	Description
		Degree / Mile	
1	133	3.6	WASHINGTON AVE.
2	163	4.6	COUNTY RD 25
3	183	4.1	COUNTY RD. 106 AND CAHILL AVE.
4	206	4.3	ACACIA AVE.
5	230	4.2	VANLITH RESIDENCE
6	253	4.6	COUNTY RD. 111
7	269	4.4	COUNTY RD. 111 (NEAR CHURCH)
8	286	4.0	W. BERGGUIST PROPERTY
9	274	1.9	SECTION 31 (T. 122 N. - R. 25 W.)
10	244	1.3	ORCHARD DR.
11	226	0.9	ORCHARD DR.
12	181	1.8	INTERSECTION COUNTY RD. 39
13	137	1.7	OTTERCREEK RD.
14	155	1.0	W. RIVER ST./COUNTY RD. 75
15	208	0.6	120TH STREET, N.E. & RD. 75
16	284	2.0	COUNTY RD. 75
17	113	1.6	COUNTY RD. 11
18	85	1.1	COUNTY RD. 11
19	63	1.2	COUNTY RD. 11
20	37	1.7	COUNTY RD. 11 & 84TH AVE.
21	23	0.8	SHERBURNE AVE(SOUTH)
22	354	0.7	SHERBURNE AVE(SOUTH)
23	338	0.8	SHERBURNE AVE(SOUTH)
24	307	1.8	BENCHMARK 948(SHERBURNE AVE)
25	339	4.1	PLEASANT ST.
26	320	6.0	COUNTY RD. 53
27	354	4.5	COUNTY RD. 67/4
28	17	3.7	COUNTY RD. 11/73
29	50	4.0	COUNTY RD. 73/81
30	77	3.6	COUNTY RD. 73/196TH ST.
31	115	3.3	LAKE ST./MARTIN AVENUE
32	90	4.6	LAKE ST.&MN AVE. (WARNING SIREN)
33	323	16.0	COUNTY RD. 3
34	323	16.0	COUNTY RD. 3
35	323	16.0	COUNTY RD. 3

NRC TLD DOSES FOR MONTICELLO AREA

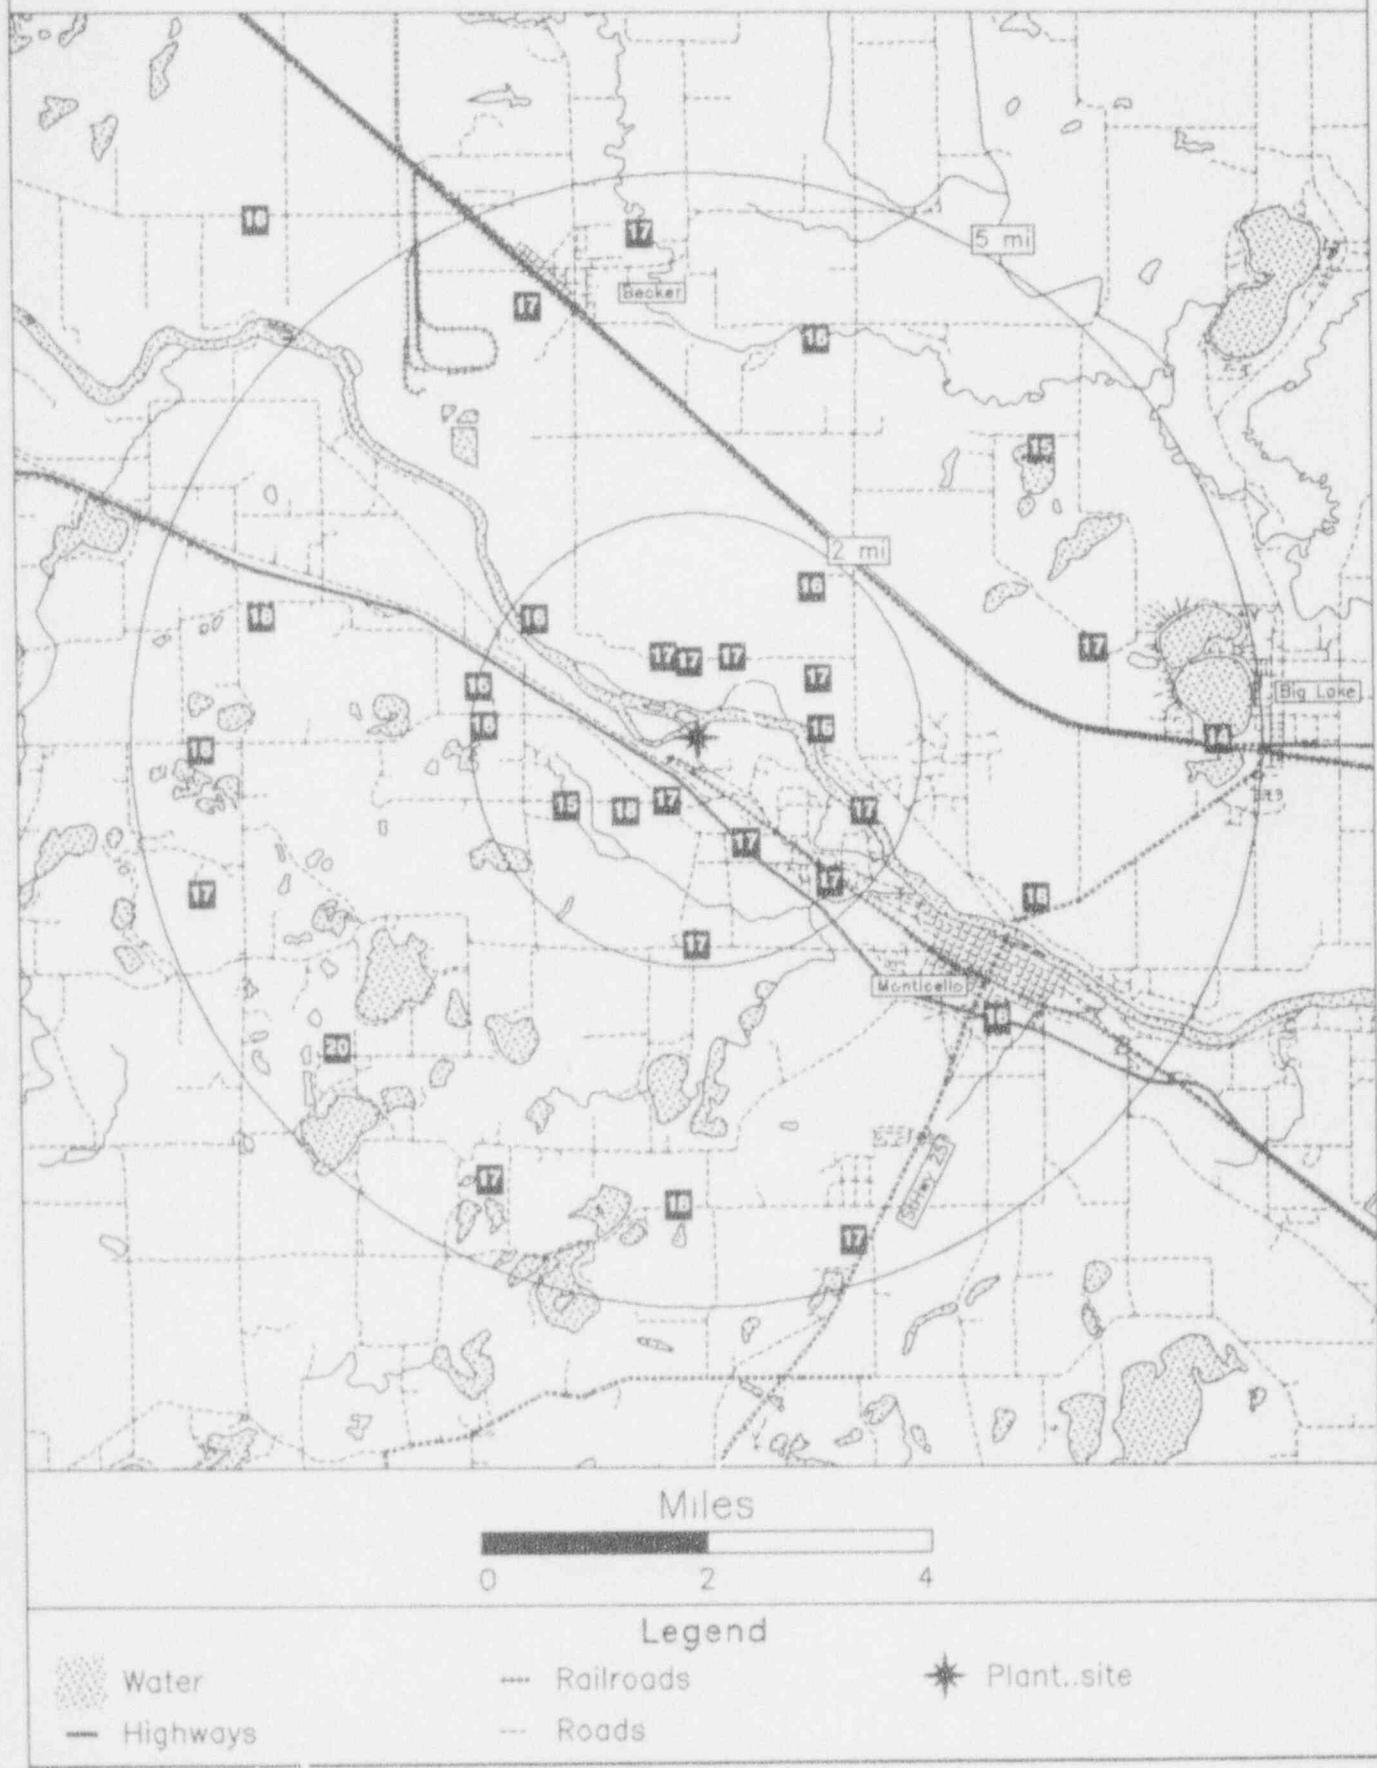

NORTH ANNA
 TLD Direct Radiation Environmental Monitoring
 For the period 930914-940202 142 Days
 Field Time: 92 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	GROSS Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	243	1.8	26.3 +- 0.8; 3.9	19.2 +- 0.9; 5.0
2	263	1.6	24.0 +- 0.7; 3.6	16.9 +- 0.8; 4.7
3	296	1.0	22.4 +- 0.7; 3.4	15.3 +- 0.8; 4.6
4	311	1.3	28.7 +- 0.9; 4.3	21.5 +- 0.9; 5.3
5	329	1.3	24.5 +- 0.7; 3.7	17.4 +- 0.8; 4.8
6	231	3.9	27.0 +- 0.8; 4.0	19.8 +- 0.9; 5.1
7	224	1.7	25.4 +- 0.8; 3.8	18.3 +- 0.9; 4.9
8	210	1.6	24.3 +- 0.7; 3.6	17.2 +- 0.8; 4.8
9	181	1.4	22.6 +- 0.7; 3.4	15.5 +- 0.8; 4.6
10	155	1.0	29.2 +- 0.9; 4.4	22.0 +- 1.0; 5.3
11	136	1.6	24.2 +- 0.7; 3.6	17.1 +- 0.8; 4.8
12	163	3.5	24.9 +- 0.7; 3.7	17.8 +- 0.8; 4.8
13	190	3.3	23.7 +- 0.7; 3.6	16.6 +- 0.8; 4.7
14	205	4.9	22.2 +- 0.7; 3.3	15.1 +- 0.8; 4.5
15	140	4.2	24.8 +- 0.7; 3.7	17.7 +- 0.8; 4.8
16	113	4.9	29.4 +- 0.9; 4.4	22.2 +- 1.0; 5.4
17	93	3.3	21.8 +- 0.7; 3.3	14.8 +- 0.8; 4.5
18	64	4.1	26.1 +- 0.8; 3.9	18.9 +- 0.9; 5.0
19	78	2.7	37.2 +- 1.1; 5.6	29.8 +- 1.2; 6.3
20	97	1.9	27.2 +- 0.8; 4.1	20.0 +- 0.9; 5.1
21	105	1.7	21.0 +- 0.6; 3.1	14.0 +- 0.7; 4.4
22	60	2.4	22.3 +- 0.7; 3.3	15.3 +- 0.8; 4.6
23	37	1.4	25.0 +- 0.7; 3.7	17.9 +- 0.8; 4.8
24	16	1.6	29.6 +- 0.9; 4.4	22.4 +- 1.0; 5.4
25	48	3.5	20.2 +- 0.6; 3.0	13.2 +- 0.7; 4.3
26	17	3.7	25.2 +- 0.8; 3.8	18.1 +- 0.9; 4.9
27	3	4.8	23.2 +- 0.7; 3.5	16.1 +- 0.8; 4.7
28	348	4.0	23.5 +- 0.7; 3.5	16.4 +- 0.8; 4.7
29	2	1.9	22.5 +- 0.7; 3.4	15.4 +- 0.8; 4.6
30	284	5.0	22.5 +- 0.7; 3.4	15.4 +- 0.8; 4.6
31	310	4.7	26.5 +- 0.8; 4.0	19.3 +- 0.9; 5.0
32	273	4.9	23.0 +- 0.7; 3.5	16.0 +- 0.8; 4.6
33	257	5.1	Missing Dosimeter	No Net Data
34	242	7.1	25.0 +- 0.8; 3.8	17.9 +- 0.8; 4.9
35	255	11.0	23.8 +- 0.7; 3.6	16.7 +- 0.8; 4.7
36	248	15.0	25.1 +- 0.8; 3.8	18.0 +- 0.8; 4.9
37	247	17.0	23.3 +- 0.7; 3.5	16.2 +- 0.8; 4.7
38	244	19.0	21.8 +- 0.7; 3.3	14.8 +- 0.8; 4.5

Transit Dose = 6.7 +- 0.4; 3.2

NORTH ANNA
For the period 930914-940202

TLD Direct Radiation Environmental Monitoring

Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	15.8 +- 0.5	2
11.26 - 33.75 NNE	20.2 +- 3.0	2
33.76 - 56.25 NE	15.5 +- 3.3	2
56.26 - 78.75 ENE	21.3 +- 7.6	3
78.76 - 101.25 E	17.4 +- 3.7	2
101.26 - 123.75 ESE	18.1 +- 5.8	2
123.76 - 146.25 SE	17.4 +- 0.4	2
146.26 - 168.75 SSE	19.9 +- 2.9	2
168.76 - 191.25 S	16.1 +- 0.8	2
191.26 - 213.75 SSW	16.2 +- 1.5	2
213.76 - 236.25 SW	19.1 +- 1.1	2
236.26 - 258.75 WSW	17.9 +- 1.2	3
258.76 - 281.25 W	16.4 +- 0.7	2
281.26 - 303.75 WNW	15.4 +- 0.1	2
303.76 - 326.25 NW	20.4 +- 1.5	2
326.26 - 348.75 NNW	16.9 +- 0.7	2


Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	18.0 +- 2.6	15
2 - 5	17.8 +- 3.8	17
> 5	17.3 +- 0.8	2
Upwind Control	16.3 +- 1.6	3

NORTH ANNA

TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	243	RT. 700 & RT. 652
2	263	RT. 685 (0.4 MILES N. OF RT. 652)
3	296	RT. 685 (1.5 MILES N. OF RT. 652)
4	311	RT. 685 (1.6 MILES N. OF RT. 652)
5	329	RT. 685 (2.1 MILES N. OF RT. 652)
6	231	RT. 700 & RT. 712
7	224	LAUREL HILL CHURCH
8	210	RT. 652 (0.8 MILES E. OF RT. 700)
9	181	RT. 652 & RD. 1205
10	155	S. SHORE OF LAKE ANNA
11	136	RT. 614 (1.2 MILES N. OF RT. 652)
12	163	INTERSECTION OF RT. 652 & RD. 728
13	190	TRICE DAIRY RD.
14	205	RT. 614 & RT. 618
15	140	RT. 622 (0.5 MILES N. OF RT. 701)
16	113	RT. 601 & RT. 622
17	93	RT. 601 (2.2 MILES N. OF LEVY)
18	64	RT. 614 (1.6 MILES NE OF RT. 601)
19	78	RT. 601 & RT. 614 (LEWISTON)
20	97	RT. 614 (1 MILE S. OF RT. 601)
21	105	RT. 614 (N. SHORE OF LAKE ANNA)
22	60	RT. 601 & RT. 689
23	37	RT. 713 (0.9 MILES S. OF RT. 601)
24	16	0.5 MILES NW OF RT. 713 ON DIRT RD.
25	48	RT. 665 (1.1 MILES W. OF RT. 601)
26	17	GOOD HOPE CHURCH ON RT. 601
27	3	RT. 601 & RIDGE RD.
28	348	RT. 643 (0.7 MILES NW OF RT. 655)
29	2	RT. 208 IN GLENORA
30	284	WARES CROSSROADS
31	310	RT. 663 (N. SHORE OF LAKE ANNA)
32	273	HWY. 522
33	257	HWY. 522 & RT. 720
34	242	MINERAL GRADE SCHOOL
35	255	HWY. 32 & RT. 208 (LA)
36	248	S. ANNA RD. & RT. 208
37	247	RT. 208 & RT. 640
38	244	RT. 208 & HWY. 64

NRC TLD DOSES FOR NORTH ANNA AREA

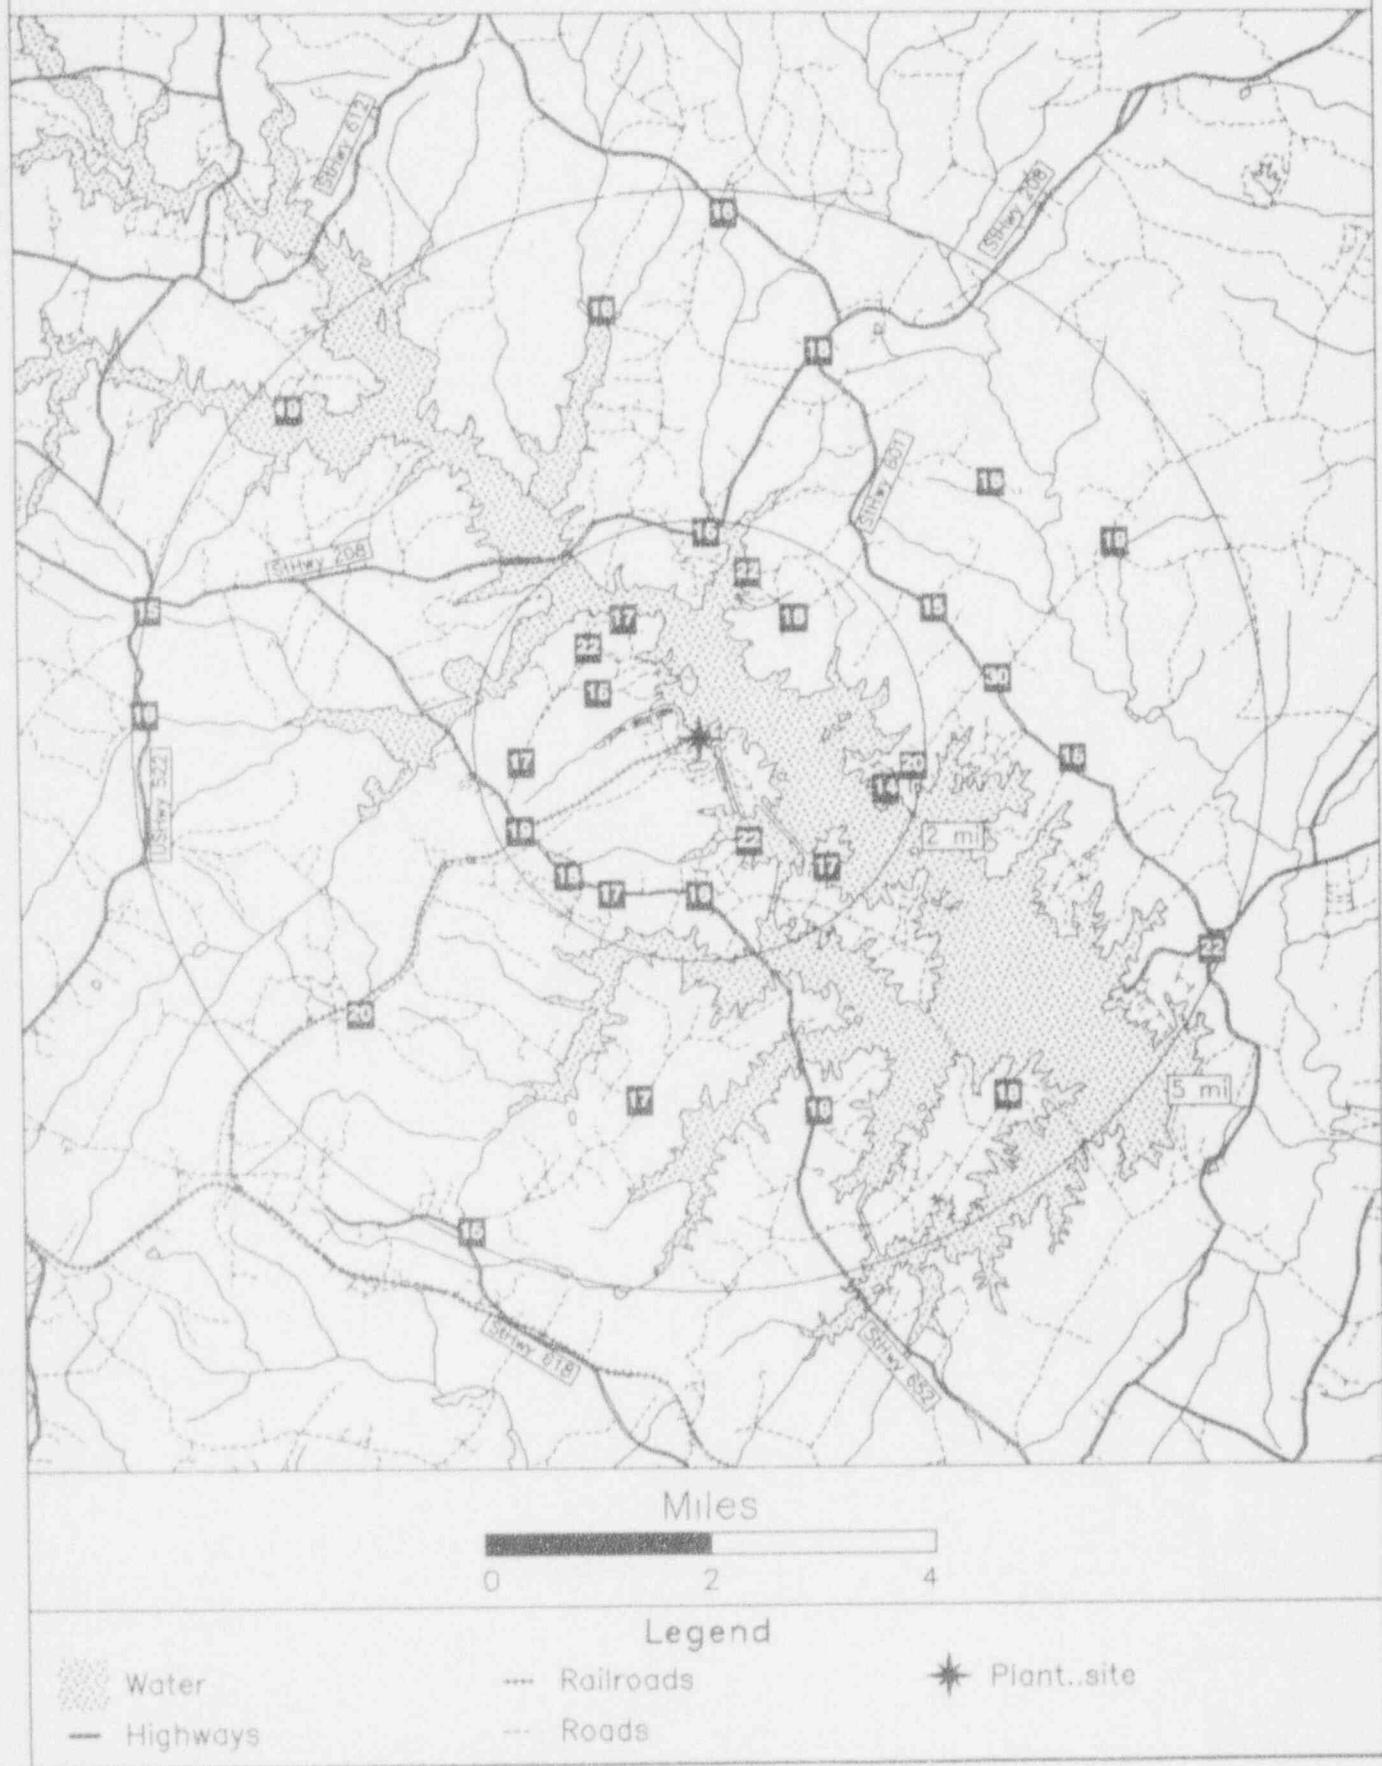

OCONEE

TLD Direct Radiation Environmental Monitoring
 For the period 930914-940203 143 Days
 Field Time: 106 Days

NRC Sta	Location	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	158	7.5	28.8 +- 0.9; 4.3	22.8 +- 2.3
2	133	4.9	33.9 +- 1.0; 5.1	25.7 +- 2.3
3	119	4.3	33.8 +- 1.0; 5.1	24.5 +- 2.1
4	84	4.7	31.5 +- 0.9; 4.7	24.8 +- 1.7
5	65	4.0	32.2 +- 1.0; 4.8	23.8 +- 2.7
6	52	1.8	32.4 +- 1.0; 4.9	25.0 +- 2.3
7	22	3.5	33.7 +- 1.0; 5.1	25.3 +- 2.1
8	33	1.4	31.5 +- 0.9; 4.7	24.9 +- 2.8
9	52	1.8	26.9 +- 0.8; 4.0	19.9 +- 1.9
10	67	1.1	26.9 +- 0.8; 4.0	17.2 +- 2.5
11	107	1.9	26.1 +- 0.8; 3.9	19.4 +- 1.9
12	87	1.0	29.9 +- 0.9; 4.5	22.2 +- 2.2
13	142	0.7	28.6 +- 0.9; 4.3	22.8 +- 1.7
14	166	0.7	22.7 +- 0.7; 3.4	19.5 +- 2.1
15	226	1.7	29.9 +- 0.9; 4.5	22.0 +- 2.0
16	207	1.4	28.1 +- 0.8; 4.2	21.5 +- 1.7
17	182	2.2	24.1 +- 0.7; 3.6	18.4 +- 1.7
18	186	3.8	Missing Dosimeter	19.5 +- 1.9
19	155	4.1	32.1 +- 1.0; 4.8	23.6 +- 0.9
20	203	8.4	25.3 +- 0.8; 3.8	18.3 +- 2.4
21	210	4.6	25.6 +- 0.8; 3.8	19.6 +- 2.1
22	227	4.8	28.3 +- 0.8; 4.2	21.6 +- 2.9
23	240	3.6	25.2 +- 0.8; 3.8	20.4 +- 2.5
24	268	3.6	32.4 +- 1.0; 4.9	24.1 +- 1.9
25	257	1.9	24.4 +- 0.7; 3.7	19.3 +- 2.2
26	293	3.6	30.2 +- 0.9; 4.5	21.1 +- 2.3
27	311	3.5	25.3 +- 0.8; 3.8	18.2 +- 1.6
28	288	2.0	26.4 +- 0.8; 4.0	20.3 +- 2.1
29	275	1.8	25.2 +- 0.8; 3.8	19.3 +- 1.7
30	321	1.8	29.6 +- 0.9; 4.4	21.7 +- 2.0
31	344	2.0	23.6 +- 0.7; 3.5	17.5 +- 2.0
32	336	3.7	34.1 +- 1.0; 5.1	26.0 +- 2.3
33	358	4.5	28.1 +- 0.8; 4.2	21.7 +- 2.5
34	256	9.4	36.1 +- 1.1; 5.4	27.6 +- 2.2
35	149	21.0	30.0 +- 0.9; 4.5	22.9 +- 2.5
36	126	8.2	30.6 +- 0.9; 4.6	24.6 +- 2.2
37	96	9.7	33.3 +- 1.0; 5.0	24.2 +- 1.7
38	32	16.0	38.7 +- 1.2; 5.8	30.2 +- 3.2
39	31	16.0	Missing Dosimeter	25.4 +- 3.1
40	29	16.0	35.5 +- 1.1; 5.3	27.0 +- 1.8

Transit Dose = 3.9 +- 0.4; 3.4

OCONEE

For the period 930914-940203

TLD Dire Radiation Environmental Monitoring

Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	20.6 +- 0.0	1
11.26 - 33.75 NNE	24.4 +- 1.3	2
33.76 - 56.25 NE	21.9 +- 3.3	2
56.26 - 78.75 ENE	21.8 +- 3.2	2
78.76 - 101.25 E	23.5 +- 1.4	3
101.26 - 123.75 ESE	22.1 +- 4.6	2
123.76 - 146.25 SE	23.1 +- 2.3	3
146.26 - 168.75 SSE	20.8 +- 3.4	4
168.76 - 191.25 S	17.2 +- 0.0	1
191.26 - 213.75 SSW	19.1 +- 1.3	3
213.76 - 236.25 SW	21.4 +- 1.0	2
236.26 - 258.75 WSW	21.0 +- 5.5	3
258.76 - 281.25 W	21.2 +- 4.4	2
281.26 - 303.75 WNW	20.7 +- 2.3	2
303.76 - 326.25 NW	20.0 +- 2.6	2
326.26 - 348.75 NNW	21.2 +- 6.3	2


Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	20.1 +- 2.4	15
2 - 5	22.2 +- 3.1	15
> 5	22.8 +- 3.1	6
Upwind Control	28.2 +- 1.9	2

OCONEE

TLD Direct Radiation Environmental Monitoring

NRC Station	Lccation Azimuth / Degree	Distance / Mile	Description
1	158	7.5	CLEMSON
2	133	4.9	LAWRENCE CHAPEL
3	119	4.3	PLEASANT HILL CHURCH
4	84	4.7	SIX MILE MICROWAVE TOWER
5	65	4.0	HWY. 133
6	52	1.8	HWY. 183
7	22	3.5	HWY. 157 (BANKS RESIDENCE)
8	33	1.4	WARPATH LANDING
9	52	1.8	HWY. 183 S. OF WARPATH RD.
10	67	1.1	HWY. 183 (1 MILE S. OF WARPATH RD.)
11	107	1.9	HWY. 160 (BAIT SHOP)
12	87	1.0	HWY. 183 (1.5 MILES S. OF WARPATH RD.)
13	142	0.7	HWY. 6 (BEAVER COLONY)
14	166	0.7	HWY. 6 (0.7 MILES S. OF HWY. 183)
15	226	1.7	HWY. 15 (MORGAN MEMORIAL CHAPEL)
16	207	1.4	HWY. 15 AT HWY. 37
17	182	2.2	HWY. 130 AT DIRT RD.
18	186	3.8	HWY. 130 (1.0 MILES N. OF NEWRY)
19	155	4.1	ISSAQEEENA LAKE RD.
20	203	8.4	SENECA WATER TOWER
21	210	4.6	SUBDIVISION OFF HWY. 588
22	227	4.8	HWY. 188 NEAR BRIDGE
23	240	3.6	NEW HOPE CHURCH
24	268	3.6	KEOWEE HIGH SCHOOL
25	257	1.9	TRAMMEL RD.
26	293	3.6	HIGHWAY 201 AT HWY. 92
27	311	3.5	STAMP CR. ACCESS AREA
28	288	2.0	HIGH FALLS CHURCH
29	275	1.8	DUKE CAMPGROUND
30	321	1.8	KEOWEE KEY GUARD HOUSE
31	344	2.0	MCCALL RESIDENCE
32	336	3.7	STAMP CR. CHURCH
33	358	4.5	KEOWEE TOWN LANDING
34	256	9.4	WALHALLA
35	149	21.0	ANDERSON
36	126	8.2	CENTRAL
37	96	9.7	LIBERTY
38	32	16.0	HOLLY SPRINGS CHURCH
39	31	16.0	HOLLY SPRINGS GROCERY
40	29	16.0	SLIDING ROCK RD. & HWY. 178

NRC TLD DOSES FOR OCONEE AREA

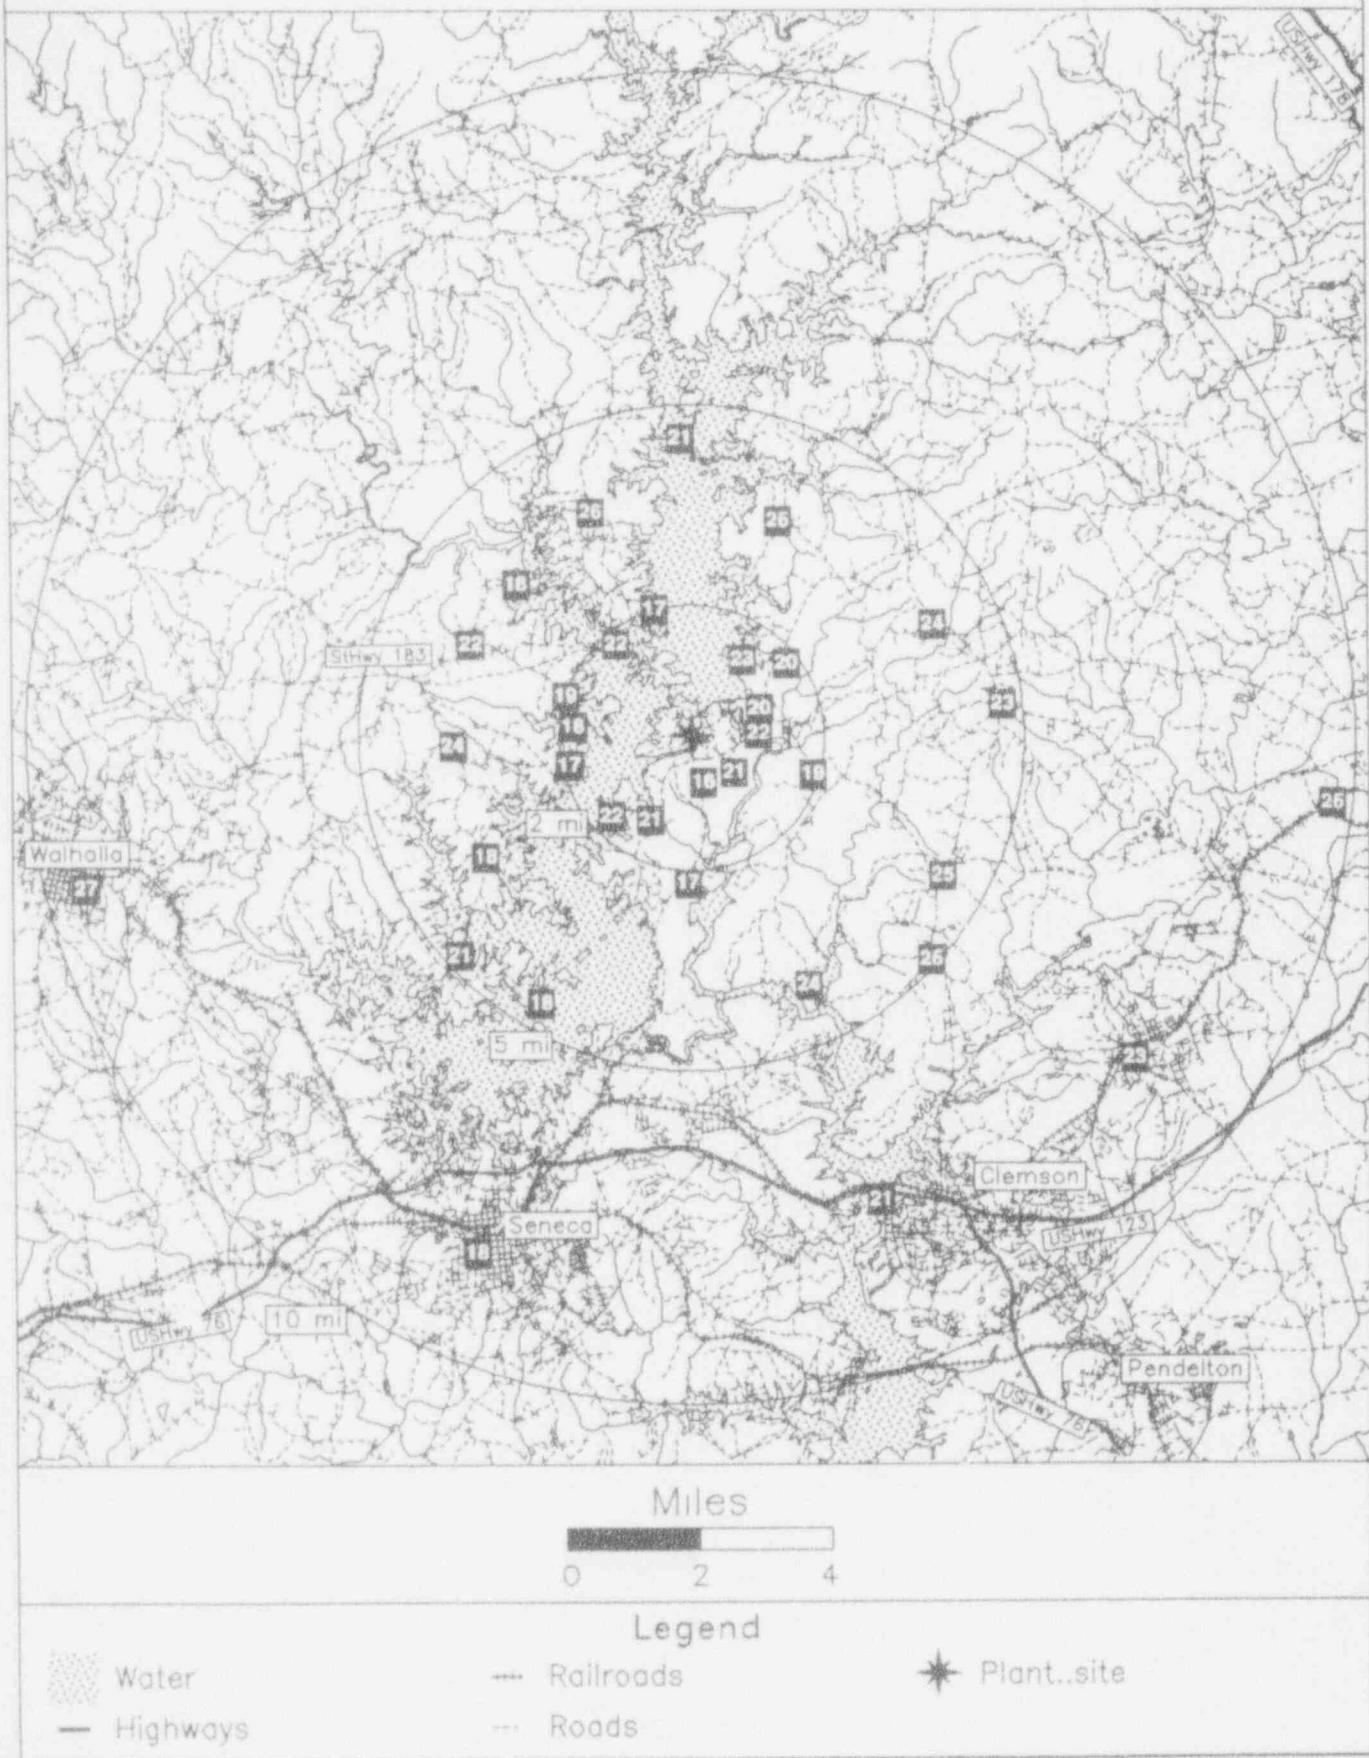

OYSTER CREEK

TLD Direct Radiation Environmental Monitoring

For the period 930915-940202 141 Days

Field Time: 92 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range	
				Net Exp Rate +-1 Std Dev	
1	141	0.5	15.6 +- 0.5; 2.3	11.2 +- 0.6; 3.7	11.4 +- 1.2
2	120	0.9	15.4 +- 0.5; 2.3	11.0 +- 0.6; 3.7	11.4 +- 1.5
3	105	1.5	16.7 +- 0.5; 2.5	12.3 +- 0.6; 3.8	12.5 +- 1.4
4	127	1.5	15.8 +- 0.5; 2.4	11.4 +- 0.6; 3.7	11.3 +- 3.0
5	137	1.3	16.9 +- 0.5; 2.5	12.4 +- 0.6; 3.3	11.6 +- 3.2
6	158	1.2	15.8 +- 0.5; 2.4	11.4 +- 0.6; 3.7	11.3 +- 2.8
7	176	2.2	16.5 +- 0.5; 2.5	12.0 +- 0.6; 3.8	11.9 +- 3.1
8	179	1.6	16.2 +- 0.5; 2.4	11.7 +- 0.6; 3.8	11.7 +- 3.0
9	159	2.8	15.7 +- 0.5; 2.4	11.2 +- 0.6; 3.7	10.5 +- 2.8
10	187	8.4	17.2 +- 0.5; 2.6	12.7 +- 0.6; 3.9	11.5 +- 3.0
11	173	4.4	15.3 +- 0.5; 2.3	10.9 +- 0.6; 3.7	11.8 +- 3.1
12	196	4.2	15.9 +- 0.5; 2.4	11.4 +- 0.6; 3.8	12.3 +- 1.7
13	198	8.6	15.8 +- 0.5; 2.4	11.4 +- 0.6; 3.7	10.7 +- 2.7
14	185	10.0	16.9 +- 0.5; 2.5	12.5 +- 0.6; 3.9	13.9 +- 1.7
15	171	11.0	16.4 +- 0.5; 2.5	12.0 +- 0.6; 3.8	11.0 +- 2.8
16	154	8.2	16.9 +- 0.5; 2.5	12.4 +- 0.6; 3.8	11.7 +- 2.9
17	126	6.3	17.2 +- 0.5; 2.6	12.7 +- 0.6; 3.9	12.7 +- 1.8
18	220	4.6	16.3 +- 0.5; 2.4	11.9 +- 0.6; 3.8	10.9 +- 2.9
19	231	2.3	16.5 +- 0.5; 2.5	12.1 +- 0.6; 3.8	11.1 +- 2.6
20	211	1.6	15.4 +- 0.5; 2.3	11.0 +- 0.6; 3.7	10.7 +- 2.6
22	258	1.5	16.4 +- 0.5; 2.5	11.9 +- 0.6; 3.8	11.3 +- 2.8
23	271	1.2	14.0 +- 0.4; 2.1	9.6 +- 0.5; 3.6	11.2 +- 3.1
24	297	1.3	Missing Dosimeter	No Net Data	11.9 +- 3.3
25	318	1.5	15.2 +- 0.5; 2.3	10.8 +- 0.6; 3.7	10.9 +- 3.0
26	341	3.2	18.9 +- 0.6; 2.8	14.4 +- 0.7; 4.0	13.2 +- 1.8
27	330	4.6	16.3 +- 0.5; 2.4	11.9 +- 0.6; 3.8	11.9 +- 3.1
28	358	3.2	14.6 +- 0.4; 2.2	10.2 +- 0.5; 3.6	11.1 +- 2.9
29	4	1.8	16.6 +- 0.5; 2.5	12.1 +- 0.6; 3.8	11.5 +- 2.9
30	19	0.8	15.8 +- 0.5; 2.4	11.3 +- 0.6; 3.7	11.5 +- 1.3
31	69	1.4	19.3 +- 0.6; 2.9	14.8 +- 0.7; 4.1	11.9 +- 3.2
32	78	2.5	15.6 +- 0.5; 2.3	11.1 +- 0.6; 3.7	10.9 +- 1.6
33	85	2.2	14.2 +- 0.4; 2.1	9.8 +- 0.5; 3.6	10.7 +- 2.7
34	38	1.7	15.5 +- 0.5; 2.3	11.0 +- 0.6; 3.7	11.6 +- 1.5
35	24	1.9	15.6 +- 0.5; 2.3	11.2 +- 0.6; 3.7	12.4 +- 3.5
36	50	3.0	15.3 +- 0.5; 2.3	10.9 +- 0.6; 3.7	12.7 +- 2.0
37	46	4.8	15.1 +- 0.5; 2.3	10.7 +- 0.6; 3.7	11.2 +- 1.4
38	27	4.0	16.7 +- 0.5; 2.5	12.2 +- 0.6; 3.8	12.4 +- 3.2
39	12	8.9	16.4 +- 0.5; 2.5	11.9 +- 0.6; 3.8	11.9 +- 2.9
40	10	8.7	15.4 +- 0.5; 2.3	10.9 +- 0.6; 3.7	11.0 +- 2.8
41	3	9.9	17.6 +- 0.5; 2.6	13.1 +- 0.6; 3.9	11.8 +- 3.3
42	38	10.0	16.4 +- 0.5; 2.5	12.0 +- 0.6; 3.8	12.4 +- 1.6
43	46	9.1	18.7 +- 0.6; 2.8	14.2 +- 0.6; 4.0	14.1 +- 3.5
44	73	6.5	15.4 +- 0.5; 2.3	10.9 +- 0.6; 3.7	10.8 +- 2.8
45	79	6.0	16.8 +- 0.5; 2.5	12.3 +- 0.6; 3.8	12.3 +- 3.1
46	278	20.0	16.8 +- 0.5; 2.5	12.3 +- 0.6; 3.8	12.3 +- 2.9
47	278	20.0	17.0 +- 0.5; 2.5	12.5 +- 0.6; 3.9	12.4 +- 2.9

Transit Dose = 4.2 +- 0.4; 3.0

OYSTER CREEK

For the period 930915-940202

TLD Direct Radiation Environmental Monitoring

Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	11.6 +- 1.3	4
11.26 - 33.75 NNE	11.7 +- 0.5	4
33.76 - 56.25 NE	11.8 +- 1.5	5
56.26 - 78.75 ENE	12.3 +- 2.2	3
78.76 - 101.25 E	11.0 +- 1.8	2
101.26 - 123.75 ESE	11.6 +- 0.9	2
123.76 - 146.25 SE	11.9 +- 0.8	4
146.26 - 168.75 SSE	11.7 +- 0.6	3
168.76 - 191.25 S	12.0 +- 0.6	6
191.26 - 213.75 SSW	11.3 +- 0.3	3
213.76 - 236.25 SW	12.0 +- 0.2	2
236.26 - 258.75 WSW	11.9 +- 0.0	1
258.76 - 281.25 W	9.6 +- 0.0	1
281.26 - 303.75 WNW	No Data +- No Data	0
303.76 - 326.25 NW	10.8 +- 0.0	1
326.26 - 348.75 NNW	13.1 +- 1.8	2

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	11.6 +- 1.1	16
2 - 5	11.5 +- 1.1	14
> 5	12.2 +- 0.9	13
Upwind Control	12.4 +- 0.1	2

OYSTER CREEK
TLD Direct Radiation Environmental Monitoring

NRC Station	Location	Azimuth / Distance	Description
		Degree / Mile	
1	141	0.5	BAY PARKWAY AVE.
2	120	0.9	BAY PARKWAY AVE.
3	105	1.5	COMPASS ROAD
4	127	1.5	NORTH OF FRESH CREEK
5	137	1.3	LIGHTHOUSE ROAD
6	158	1.2	WARETOWN SUBSTATION
7	176	2.2	WARETOWN SUBSTATION
8	179	1.6	AHEARNS SEAFOOD MARKET
9	159	2.8	BARNEGAT BEACH
10	187	8.4	BAYSHORE DRIVE
11	173	4.4	BAYSHORE DRIVE
12	196	4.2	BARNEGATE ELEMENTARY SCHOOL
13	198	8.6	MONAHAWKIN
14	185	10.0	MARGUS MARINA
15	171	11.0	LONG BEACH BLVD.&8TH ST.
16	154	8.2	LONG BEACH BLVD.& 70TH ST.
17	126	6.3	6TH AND BAY AVE.
18	220	4.6	BARNEGAT ESTATES
19	231	2.3	GARDEN STATE PARKWAY INTERCHANGE#69
20	211	1.6	ROUTE 532(WARETOWN CREEK)
22	258	1.5	GARDEN STATE PARKWAY
23	271	1.2	GARDEN STATE PARKWAY
24	297	1.3	GARDEN STATE PARKWAY
25	318	1.5	GARDEN STATE PARKWAY
26	341	3.2	PARKSIDE DRIVE
27	330	4.6	LACEY ROAD
28	358	3.2	LACEY TOWNSHIP MUNICIPAL BLDG.
29	4	1.8	LAKE BARNEGAT SOUTH SHORE
30	19	0.8	CLEAR WATER DRIVE
31	69	1.4	BEACH BLVD.
32	78	2.5	BEACH BLVD.
33	85	2.2	BEACH BLVD.
34	38	1.7	BAY AVE.
35	24	1.9	LACEY ROAD
36	50	3.0	SUNRISE BLVD.
37	46	4.8	LAUREL BLVD.
38	27	4.0	LANOKA FIRE AND FIRST AID STATION
39	12	8.9	ADMIRAL FARRAGUT ACADEMY
40	10	8.7	PROSPECT AVE.
41	3	9.9	FRANKLIN AVE.
42	38	10.0	J STREET
43	46	9.1	ISLAND BEACH STATE PARK
44	73	6.5	ISLAND BEACH STATE PARK
45	79	6.0	ISLAND BEACH STATE PARK
46	278	20.0	LEBANON STATE PARK
47	278	20.0	LEBANON STATE PARK

NRC TLD DOSES FOR OYSTER CREEK AREA



PALISADES

TLD Direct Radiation Environmental Monitoring
 For the period 930914-940201 141 Days
 Field Time: 92 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	195	4.9	19.7 +- 0.6; 3.0	13.7 +- 0.7; 4.2
2	173	4.6	18.1 +- 0.5; 2.7	12.1 +- 0.7; 4.1
3	156	3.9	21.7 +- 0.6; 3.2	15.6 +- 0.7; 4.4
4	132	4.6	20.8 +- 0.6; 3.1	14.7 +- 0.7; 4.3
5	118	3.3	22.1 +- 0.7; 3.3	16.0 +- 0.8; 4.5
6	152	1.8	17.2 +- 0.5; 2.6	11.2 +- 0.6; 4.0
7	196	2.2	19.5 +- 0.6; 2.9	13.5 +- 0.7; 4.2
8	178	1.6	19.0 +- 0.6; 2.9	13.0 +- 0.7; 4.2
9	200	0.9	20.0 +- 0.6; 3.0	14.0 +- 0.7; 4.3
10	124	1.8	18.1 +- 0.5; 2.7	12.1 +- 0.7; 4.1
11	107	1.6	21.3 +- 0.6; 3.2	15.2 +- 0.7; 4.4
12	90	1.5	17.6 +- 0.5; 2.6	11.6 +- 0.6; 4.0
13	65	1.7	21.1 +- 0.6; 3.2	15.1 +- 0.7; 4.4
14	51	1.9	Missing Dosimeter	No Net Data
15	74	3.7	18.5 +- 0.6; 2.8	12.5 +- 0.7; 4.1
16	90	3.6	17.7 +- 0.5; 2.7	11.8 +- 0.7; 4.0
17	98	10.0	20.6 +- 0.6; 3.1	14.5 +- 0.7; 4.3
18	47	4.5	21.8 +- 0.7; 3.3	15.7 +- 0.7; 4.4
19	23	1.5	17.2 +- 0.5; 2.6	11.2 +- 0.6; 4.0
20	32	4.8	21.2 +- 0.6; 3.2	15.2 +- 0.7; 4.4
21	29	7.0	20.9 +- 0.6; 3.1	14.8 +- 0.7; 4.3
22	99	15.0	20.9 +- 0.6; 3.1	14.9 +- 0.7; 4.4
23	98	18.0	21.2 +- 0.6; 3.2	15.2 +- 0.7; 4.4
24	98	18.0	20.3 +- 0.6; 3.0	14.3 +- 0.7; 4.3

Transit Dose = 5.7 +- 0.4; 3.2

PALISADES
For the period 930914-940201

TLD Direct Radiation Environmental Monitoring

Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	No Data +- No Data	0
11.26 - 33.75 NNE	13.7 +- 2.2	3
33.76 - 56.25 NE	15.7 +- 0.0	1
56.26 - 78.75 ENE	13.8 +- 1.8	2
78.76 - 101.25 E	12.6 +- 1.7	3
101.26 - 123.75 ESE	15.6 +- 0.5	2
123.76 - 146.25 SE	13.4 +- 1.8	2
146.26 - 168.75 SSE	13.4 +- 3.1	2
168.76 - 191.25 S	12.5 +- 0.6	2
191.26 - 213.75 SSW	13.7 +- 0.2	3
213.76 - 236.25 SW	No Data +- No Data	0
236.26 - 258.75 WSW	No Data +- No Data	0
258.76 - 281.25 W	No Data +- No Data	0
281.26 - 303.75 WNW	No Data +- No Data	0
303.76 - 326.25 NW	No Data +- No Data	0
326.26 - 348.75 NNW	No Data +- No Data	0


Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	12.9 +- 1.7	8
2 - 5	14.1 +- 1.6	10
> 5	14.7 +- 0.2	2
Upwind Control	14.8 +- 0.5	3

PALISADES

TLD Direct Radiation Environmental Monitoring

NRC Station	Location		Description
	Azimuth / Degree	Distance / Mile	
1	195	4.9	BLUE STAR HWY. (US 33)
2	173	4.6	75TH ST.
3	156	3.9	76TH ST. & 38TH AVE.
4	132	4.6	36TH AVE.
5	118	3.3	COUNTY RD. 378 (30TH AVE.)
6	152	1.8	77.5 ST. & 30TH AVE.
7	196	2.2	32ND AVE.
8	178	1.6	BLUE STAR HWY. (US 33)
9	200	0.9	PALISADES PARK COUNTRY CLUB
10	124	1.8	28TH AVE. & 76TH ST.
11	107	1.6	76TH ST.
12	90	1.5	76TH ST. & 24TH ST.
13	65	1.7	76TH ST.
14	51	1.9	76TH ST.
15	74	3.7	72ND ST. & COUNTY RD. 380 (20TH AVE.)
16	90	3.6	72ND ST. & 24TH AVE.
17	98	10.0	COUNTY RD. 378
18	47	4.5	12TH AVE.
19	23	1.5	18TH AVE.
20	32	4.8	MICHIGAN 43 & BLUE STAR HWY. (US 33)
21	29	7.0	PHOENIX RD.
22	99	15.0	MICHIGAN 43
23	98	18.0	MICHIGAN 43
24	98	18.0	MICHIGAN 43

NRC TLD DOSES FOR PALISADES AREA

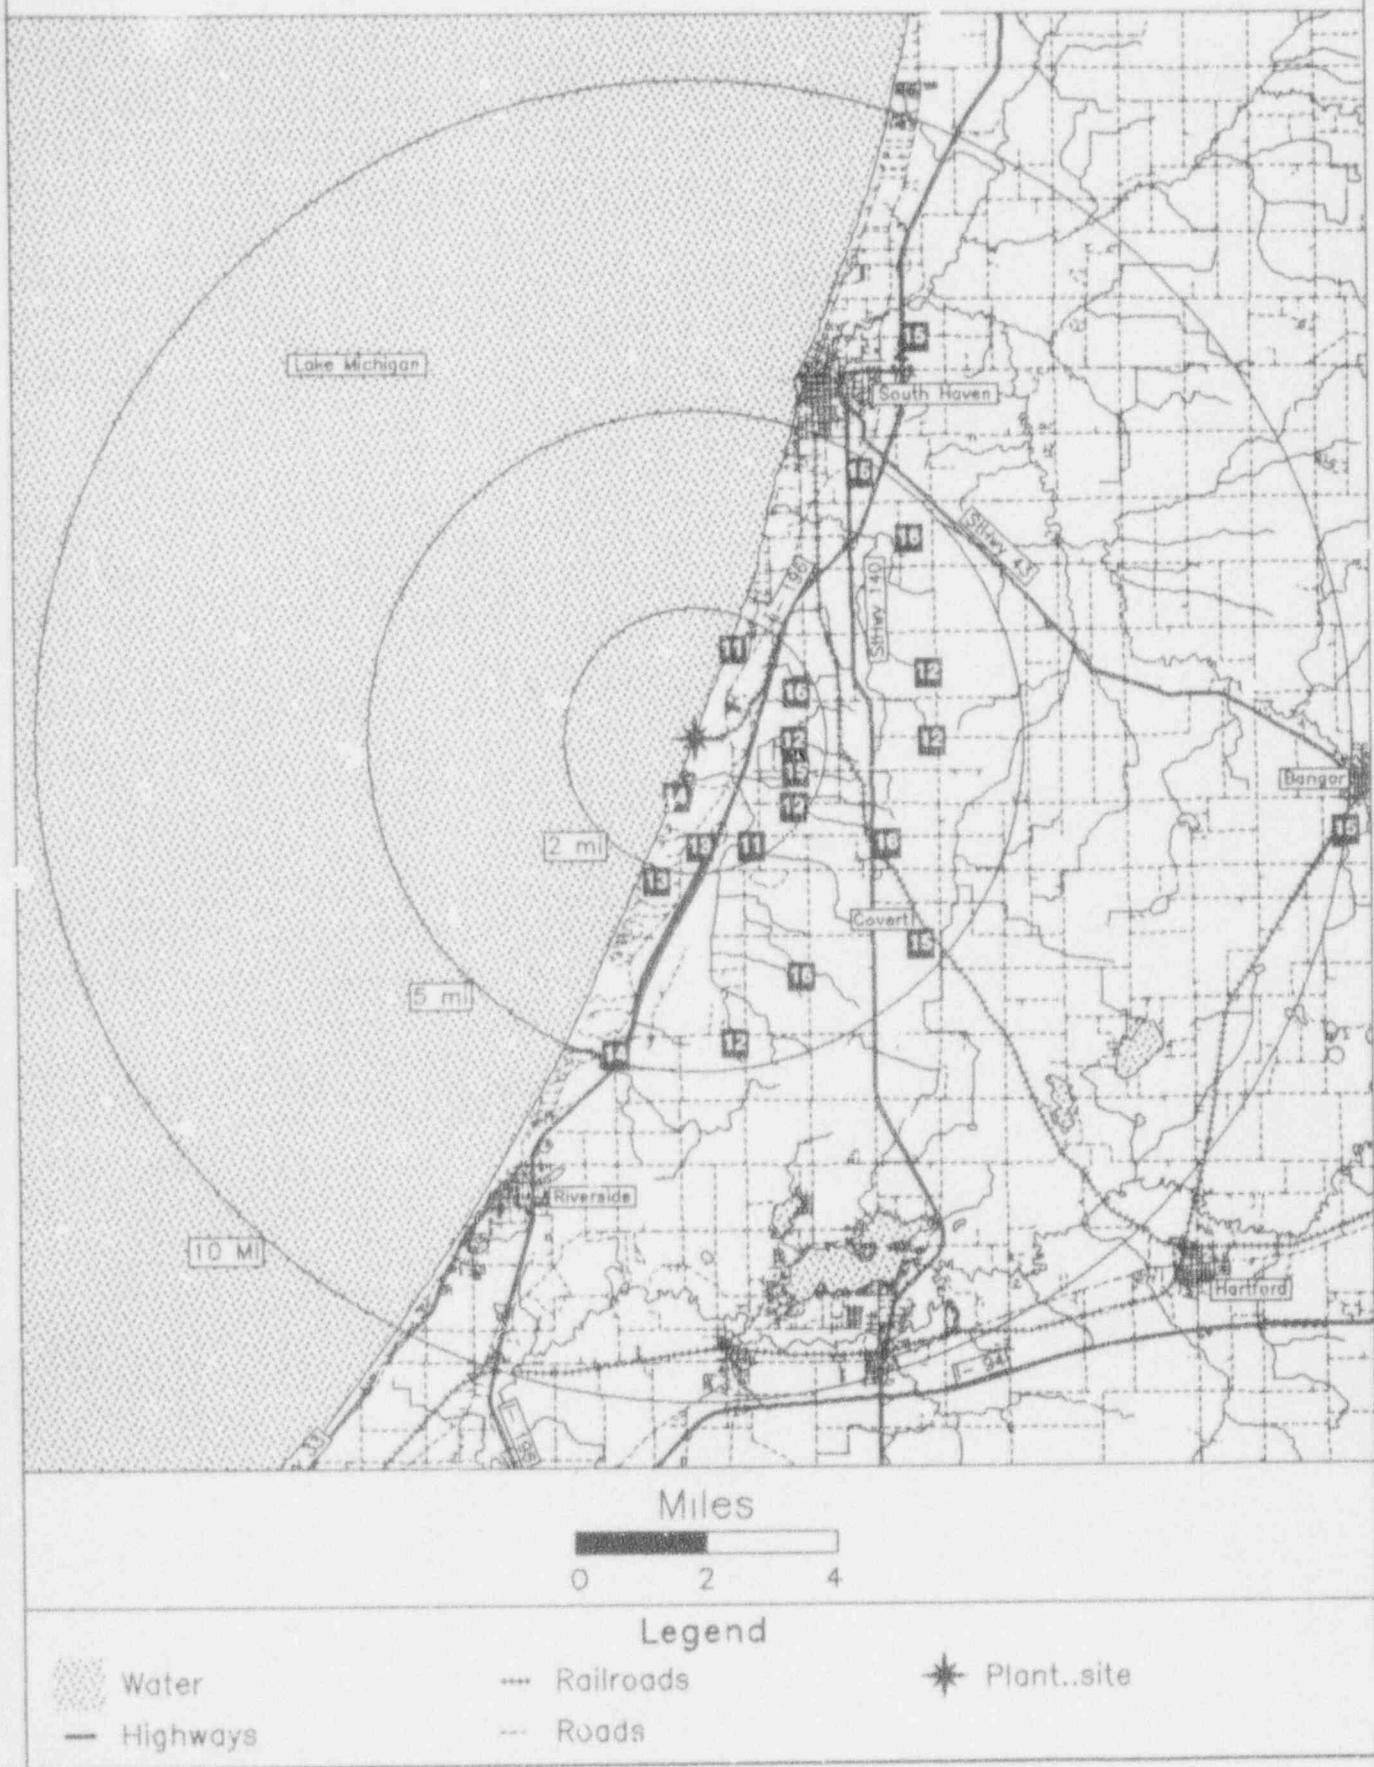

PALO VERDE

TLD Direct Radiation Environmental Monitoring
 For the period 930913-940127 137 Days
 Field Time: 91 Days

NRC Sta	Location		Gross	Net Exposure Rate	Hist. Range
	Azimuth/Dist (Deg)/(Mi)		Exposure (mR) +-Rdm; Tot.	(mR/Std. Qtr.) +-Rdm; Tot.	Net Exp Rate +-1 Std Dev
1	74	23.0	24.3 +- 0.7; 3.6	19.4 +- 0.8; 4.7	20.1 +- 1.6
2	92	21.0	24.3 +- 0.7; 3.6	19.3 +- 0.8; 4.7	20.8 +- 1.9
3	89	15.0	25.4 +- 0.8; 3.8	20.4 +- 0.8; 4.8	20.2 +- 1.9
4	103	11.0	24.4 +- 0.7; 3.7	19.4 +- 0.8; 4.7	20.5 +- 1.9
5	140	7.4	25.9 +- 0.8; 3.9	20.9 +- 0.8; 4.9	21.5 +- 1.8
6	142	3.1	24.3 +- 0.7; 3.6	19.4 +- 0.8; 4.7	20.7 +- 1.7
7	162	2.6	25.5 +- 0.8; 3.8	20.5 +- 0.8; 4.8	20.7 +- 1.7
8	168	2.6	25.3 +- 0.8; 3.8	20.3 +- 0.8; 4.8	20.9 +- 1.9
9	193	2.6	27.1 +- 0.8; 4.1	22.1 +- 0.9; 5.0	22.3 +- 1.7
10	215	3.1	27.1 +- 0.8; 4.1	22.1 +- 0.9; 5.0	22.2 +- 1.9
11	200	1.7	26.1 +- 0.8; 3.9	21.1 +- 0.9; 4.9	22.3 +- 1.7
12	214	1.0	25.1 +- 0.8; 3.8	20.1 +- 0.8; 4.8	21.5 +- 1.7
13	242	0.7	27.2 +- 0.8; 4.1	22.2 +- 0.9; 5.0	23.7 +- 2.0
14	263	0.6	25.6 +- 0.8; 3.8	20.6 +- 0.8; 4.8	22.1 +- 1.9
15	295	0.6	25.0 +- 0.8; 3.8	20.1 +- 0.8; 4.8	21.6 +- 1.8
16	325	1.0	25.6 +- 0.8; 3.8	20.6 +- 0.8; 4.8	21.6 +- 1.7
17	347	1.8	26.9 +- 0.8; 4.0	21.9 +- 0.9; 5.0	22.3 +- 1.8
18	0	2.4	27.2 +- 0.8; 4.1	22.2 +- 0.9; 5.0	22.9 +- 1.8
19	18	1.5	24.2 +- 0.7; 3.6	19.2 +- 0.8; 4.7	20.4 +- 1.6
20	37	2.0	26.2 +- 0.8; 3.9	21.2 +- 0.9; 4.9	21.4 +- 1.5
21	58	2.3	26.4 +- 0.8; 4.0	21.4 +- 0.9; 4.9	22.5 +- 1.9
22	75	2.8	27.3 +- 0.8; 4.1	22.3 +- 0.9; 5.0	22.9 +- 1.6
23	93	4.4	26.3 +- 0.8; 4.0	21.4 +- 0.9; 4.9	22.0 +- 1.8
24	101	3.3	Missing Dosimeter	No Net Data	21.8 +- 2.3
25	346	2.9	Damaged Dosimeter	No Net Data	21.8 +- 1.8
26	334	4.3	29.5 +- 0.9; 4.4	24.5 +- 0.9; 5.3	24.3 +- 1.8
27	333	7.9	30.6 +- 0.9; 4.6	25.5 +- 1.0; 5.4	24.6 +- 2.5
28	0	7.0	27.9 +- 0.8; 4.2	22.9 +- 0.9; 5.1	22.6 +- 1.8
29	9	4.2	28.2 +- 0.8; 4.2	23.2 +- 0.9; 5.1	23.6 +- 1.8
30	27	3.6	28.0 +- 0.8; 4.2	23.0 +- 0.9; 5.1	23.2 +- 1.9
31	49	3.5	26.8 +- 0.8; 4.0	21.8 +- 0.9; 5.0	23.5 +- 1.7
32	120	3.3	28.2 +- 0.8; 4.2	23.2 +- 0.9; 5.1	24.2 +- 1.9

Transit Dose = 4.7 +- 0.4; 3.0

PALO VERDE
For the period 930913-940127

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	22.8 +- 0.5	3
11.26 - 33.75 NNE	21.1 +- 2.7	2
33.76 - 56.25 NE	21.5 +- 0.4	2
56.26 - 78.75 ENE	21.9 +- 0.6	2
78.76 - 101.25 E	21.4 +- 0.0	1
101.26 - 123.75 ESE	21.3 +- 2.7	2
123.76 - 146.25 SE	20.1 +- 1.1	2
146.26 - 168.75 SSE	20.4 +- 0.1	2
168.76 - 191.25 S	No Data +- No Data	0
191.26 - 213.75 SSW	21.6 +- 0.7	2
213.76 - 236.25 SW	21.1 +- 1.4	2
236.26 - 258.75 WSW	22.2 +- 0.0	1
258.76 - 281.25 W	20.6 +- 0.0	1
281.26 - 303.75 WNW	20.1 +- 0.0	1
303.76 - 326.25 NW	20.6 +- 0.0	1
326.26 - 348.75 NNW	24.0 +- 1.9	3

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	20.8 +- 0.9	9
2 - 5	22.0 +- 1.3	14
> 5	22.2 +- 2.6	4
Upwind Control	19.7 +- 0.6	3

PALO VERDE
TLD Direct Radiation Environmental Monitoring

NRC Station	Location	Azimuth / Distance	Description
		Degree / Mile	
1	74	23.0	SCOTT LIBBY SCHOOL
2	92	21.0	LIBERTY SCHOOL
3	89	15.0	BUCKEYE
4	103	11.0	PALO VERDE SCHOOL
5	140	7.4	ARLINGTON SCHOOL
6	142	3.1	APS SUBSTATION
7	162	2.6	ELLIOT ROAD (2.2MI.W.OF 355TH AVE.)
8	168	2.6	ELLIOT ROAD RR CROSSING
9	193	2.6	ELLIOT & WINTERSBURG ROAD
10	215	3.1	ELLIOT ROAD RESIDENCE
11	200	1.7	1MI.N.ON WINTERSBURG RD(FROM ELLIOT RD.)
12	214	1.0	1.7MI.N. WINTERSBURG RD(FROM ELLIOT RD.)
13	242	0.7	2MI.N. WINTERSBURG RD(FROM ELLIOT RD.)
14	263	0.6	2.5MI.N. WINTERSBURG RD(FROM ELLIOT RD.)
15	295	0.6	WINTERSBURG RD. (PALO VERDE GATE#2)
16	325	1.0	3.6MI.N.WINTERSBURG RD(FROM ELLIOT RD.)
17	347	1.8	4.7MI.N.WINTERSBURG RD(FROM ELLIOT RD.)
18	0	2.4	WINTERSBURG
19	18	1.5	ED THOMAS RESIDENCE
20	37	2.0	BUCKEYE-SALOME RD. (NEAR GATE#14)
21	58	2.3	GUY POLE(BUCKEYE-SALOME ROAD)
22	75	2.8	ROGERS RES. AT 355TH & SALOME
23	93	4.4	INTERSECT. BUCKEYE-SALOME&339TH AVE.
24	101	3.3	BASELINE ROAD&351ST AVE.
25	346	2.9	NEAR BUCKEYE SALOME&WINTERSBURG RD.
26	334	4.3	INTERSECTION BUCKEYE-SALOME RD.&395TH AVE.
27	333	7.9	TONOPAH
28	0	7.0	RUTH FISHER SCHOOL
29	9	4.2	VAN BUREN & 371ST AVE (STOP SIGN, SE CORNER)
30	27	3.6	BUCKEYE ROAD & 363RD AVE.
31	49	3.5	BUCKEYE ROAD & 355TH AVE.
32	120	3.3	355TH AVE. & DOBBINS ROAD

NRC TLD DOSES FOR PALO VERDE AREA

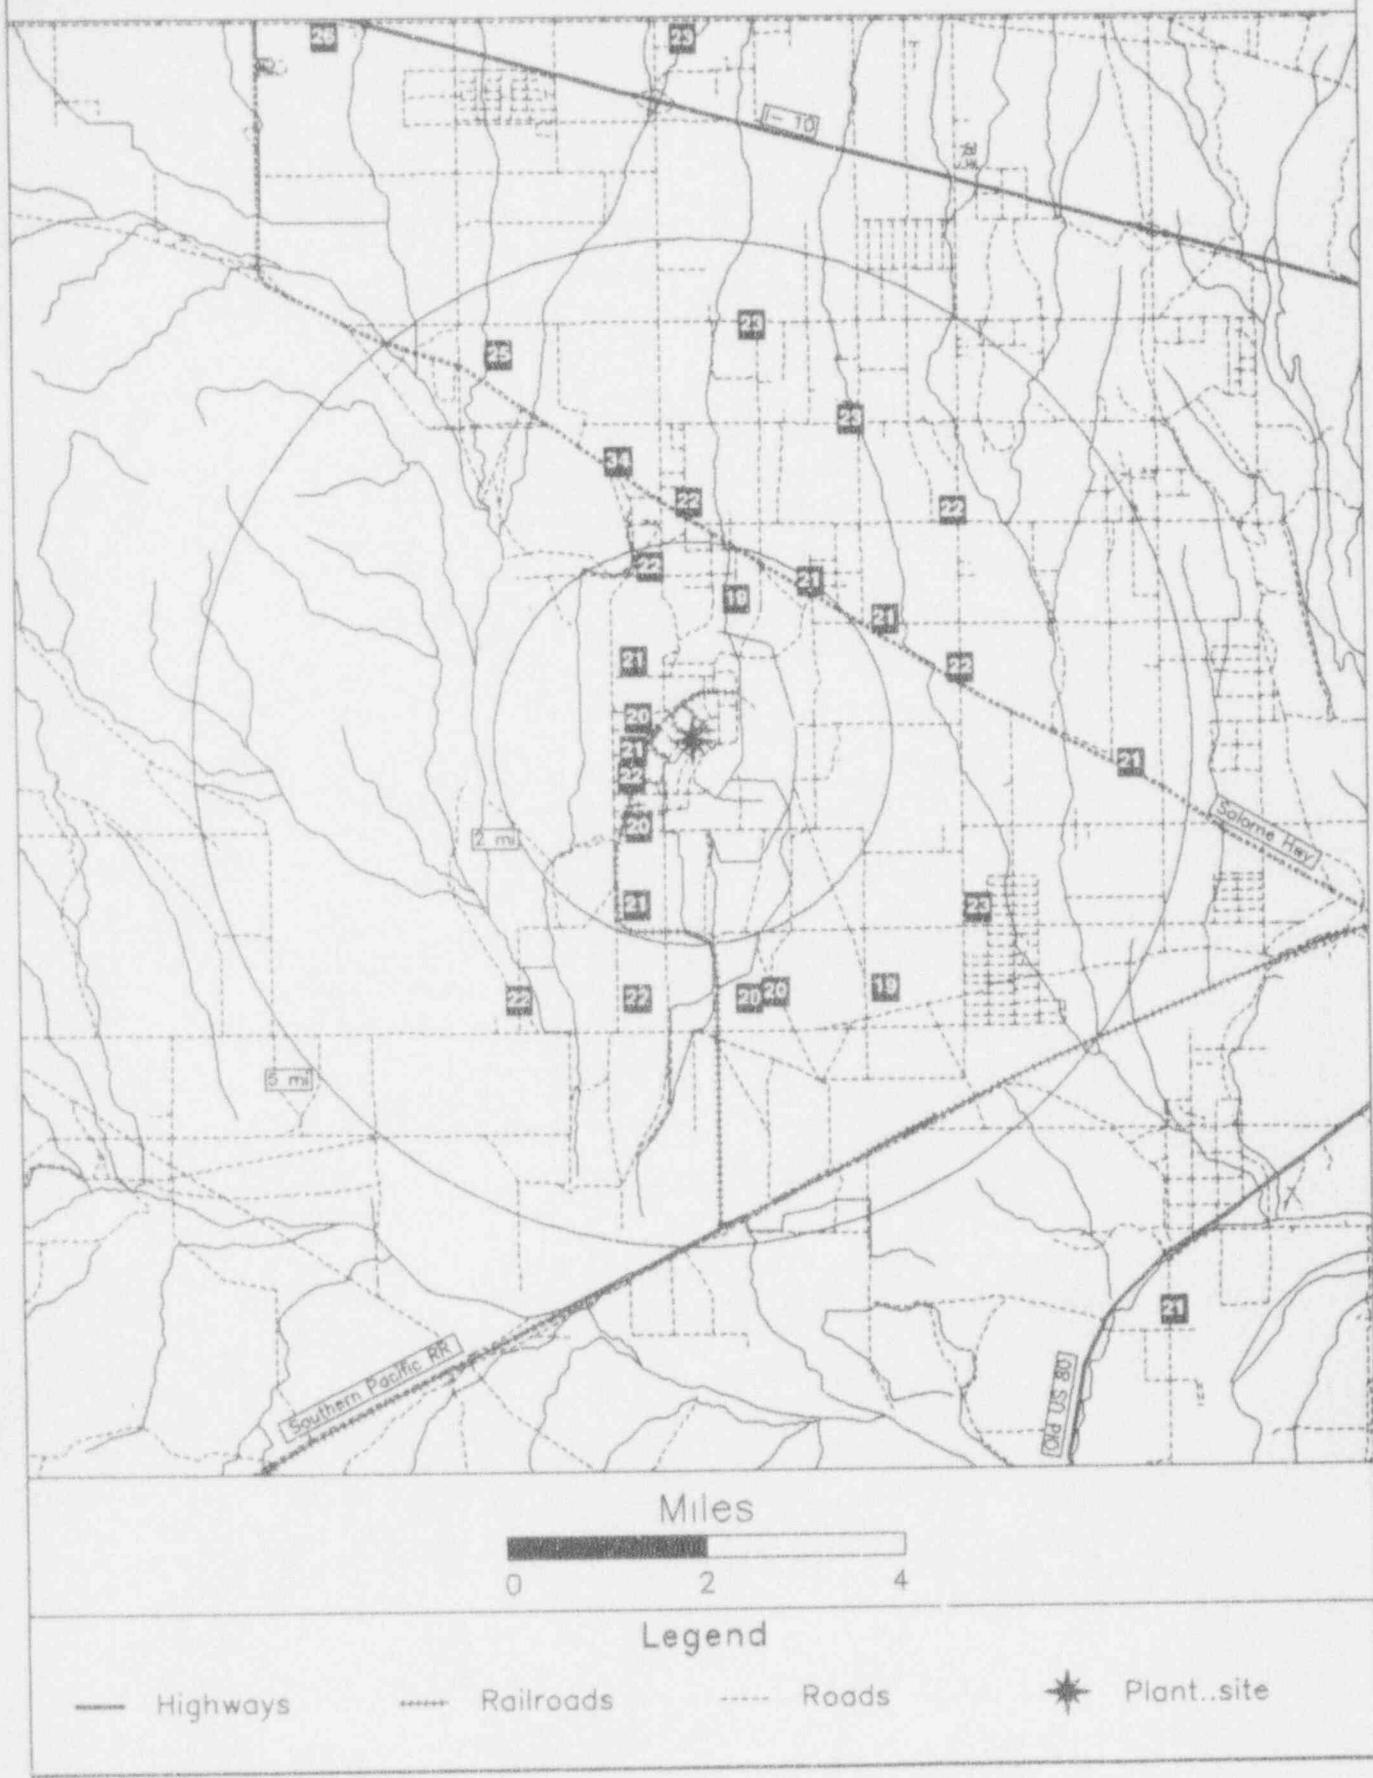

PEACH BOTTOM

TLD Direct Radiation Environmental Monitoring
 For the period 930915-940127 135 Days
 Field Time: 89 Days

NRC Sta	Location	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	330	10.3	21.8 +- 0.7; 3.3	17.9 +- 0.7; 4.4
2	33	10.5	22.0 +- 0.7; 3.3	18.2 +- 0.8; 4.5
3	21	4.8	21.5 +- 0.6; 3.2	17.7 +- 0.7; 4.4
4	3	5.0	20.9 +- 0.6; 3.1	17.0 +- 0.7; 4.3
5	344	4.1	21.5 +- 0.6; 3.2	17.6 +- 0.7; 4.4
6	1	2.2	22.7 +- 0.7; 3.4	18.8 +- 0.8; 4.5
7	26	2.4	21.3 +- 0.6; 3.2	17.4 +- 0.7; 4.4
8	55	2.8	22.6 +- 0.7; 3.4	18.7 +- 0.8; 4.5
9	42	2.0	22.2 +- 0.7; 3.3	18.4 +- 0.8; 4.5
10	62	1.7	23.6 +- 0.7; 3.5	19.8 +- 0.8; 4.6
11	96	1.9	18.3 +- 0.6; 2.8	14.5 +- 0.7; 4.1
12	105	2.3	21.3 +- 0.6; 3.2	17.5 +- 0.7; 4.4
13	72	5.0	20.6 +- 0.6; 3.1	16.7 +- 0.7; 4.3
14	85	4.6	23.1 +- 0.7; 3.5	19.2 +- 0.8; 4.6
15	109	4.3	23.0 +- 0.7; 3.4	19.1 +- 0.8; 4.6
16	130	4.6	17.3 +- 0.5; 2.6	13.4 +- 0.6; 3.9
17	157	8.9	17.8 +- 0.5; 2.7	13.9 +- 0.6; 4.0
18	163	4.6	20.9 +- 0.6; 3.1	17.0 +- 0.7; 4.3
19	183	3.9	23.2 +- 0.7; 3.5	19.4 +- 0.8; 4.6
20	201	4.8	21.9 +- 0.7; 3.3	18.1 +- 0.7; 4.4
21	196	2.3	23.3 +- 0.7; 3.5	19.5 +- 0.8; 4.6
22	182	1.7	22.6 +- 0.7; 3.4	18.8 +- 0.8; 4.5
23	157	1.8	25.0 +- 0.8; 3.8	21.2 +- 0.8; 4.8
24	219	1.8	25.5 +- 0.8; 3.8	21.7 +- 0.8; 4.9
25	249	1.7	24.4 +- 0.7; 3.7	20.6 +- 0.8; 4.7
26	269	1.8	24.8 +- 0.7; 3.7	21.0 +- 0.8; 4.8
27	286	1.9	21.7 +- 0.7; 3.3	17.9 +- 0.7; 4.4
28	323	1.8	20.1 +- 0.6; 3.0	16.2 +- 0.7; 4.2
29	286	3.6	25.0 +- 0.8; 3.8	21.2 +- 0.8; 4.8
30	262	4.0	25.4 +- 0.8; 3.8	21.6 +- 0.8; 4.9
31	261	9.9	Damaged Dosimeter	No Net Data
32	247	3.2	22.3 +- 0.7; 3.3	18.4 +- 0.8; 4.5
33	235	3.6	17.6 +- 0.5; 2.6	13.7 +- 0.6; 4.0
34	319	4.9	24.3 +- 0.7; 3.6	20.5 +- 0.8; 4.7
35	149	0.7	21.7 +- 0.7; 3.3	17.8 +- 0.7; 4.4
36	147	17.9	18.1 +- 0.5; 2.7	14.2 +- 0.6; 4.0
37	147	17.9	18.7 +- 0.6; 2.8	14.8 +- 0.7; 4.1
38	147	17.9	18.1 +- 0.5; 2.7	14.2 +- 0.6; 4.0

Transit Dose = 4.0 +- 0.3; 2.9

PEACH BOTTOM
For the period 930915-940127

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	17.9 +- 1.3	2
11.26 - 33.75 NNE	17.7 +- 0.4	3
33.76 - 56.25 NE	18.5 +- 0.3	2
56.26 - 78.75 ENE	18.3 +- 2.2	2
78.76 - 101.25 E	16.8 +- 3.4	2
101.26 - 123.75 ESE	18.3 +- 1.2	2
123.76 - 146.25 SE	13.4 +- 0.0	1
146.26 - 168.75 SSE	17.5 +- 3.0	4
168.76 - 191.25 S	19.1 +- 0.5	2
191.26 - 213.75 SSW	18.8 +- 1.0	2
213.76 - 236.25 SW	17.7 +- 5.7	2
236.26 - 258.75 WSW	19.5 +- 1.5	2
258.76 - 281.25 W	21.3 +- 0.4	2
281.26 - 303.75 WNW	19.5 +- 2.4	2
303.76 - 326.25 NW	18.3 +- 3.0	2
326.26 - 348.75 NNW	17.8 +- 0.2	2

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	18.9 +- 2.3	11
2 - 5	18.1 +- 2.1	20
> 5	16.7 +- 2.4	3
Upwind Control	14.4 +- 0.3	3

PEACH BOTTOM
TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	330	PEQUEA
2	33	QUARRYVILLE
3	21	RIVER ROAD
4	3	RIVER ROAD & SUSQUEHANNOCK DRIVE
5	344	RMC ECOLOGICAL LABORATORY
6	1	DRUMORE
7	26	HARMONY RIDGE & BALD EAGLE RDS.
8	55	CHERRY HILL & SLATE HILL RDS.
9	42	BALD EAGLE RD. 90 DEG. BEND
10	62	FULTON WEATHER STATION
11	96	PETERS CREEK
12	105	PEACH BOTTOM
13	72	WAKEFIELD
14	85	PILOTTOWN ROAD
15	109	PLEASANT GROVE CHURCH
16	130	ST. PATRICK'S CHAPEL
17	157	DARLINGTON, MD
18	163	BROAD CREEK
19	183	CORNERSTONE CHURCH
20	201	MOUNT VERNON CHURCH
21	196	ORCHARD ROAD
22	182	ORCHARD ROAD & KRICK ROAD
23	157	ORCHARD CAMPGROUND
24	219	FLINTVILLE & ATOM ROADS
25	249	WILEY ROAD
26	269	AILES ROAD
27	286	FLINTVILLE & PAPER MILL ROADS
28	323	COLD CABIN PARK
29	286	PA74 AND PAPER MILL ROAD
30	262	SCOTT CREEK
31	261	REID RESIDENCE
32	247	LAY ROAD
33	235	DELTA
34	319	NORMAN WOOD BRIDGE
35	149	BURK RESIDENCE
36	147	HAVRE DE GRACE, MD
37	147	HAVRE DE GRACE, MD
38	147	HAVRE DE GRACE, MD

NRC TLD DOSES FOR PEACH BOTTOM AREA

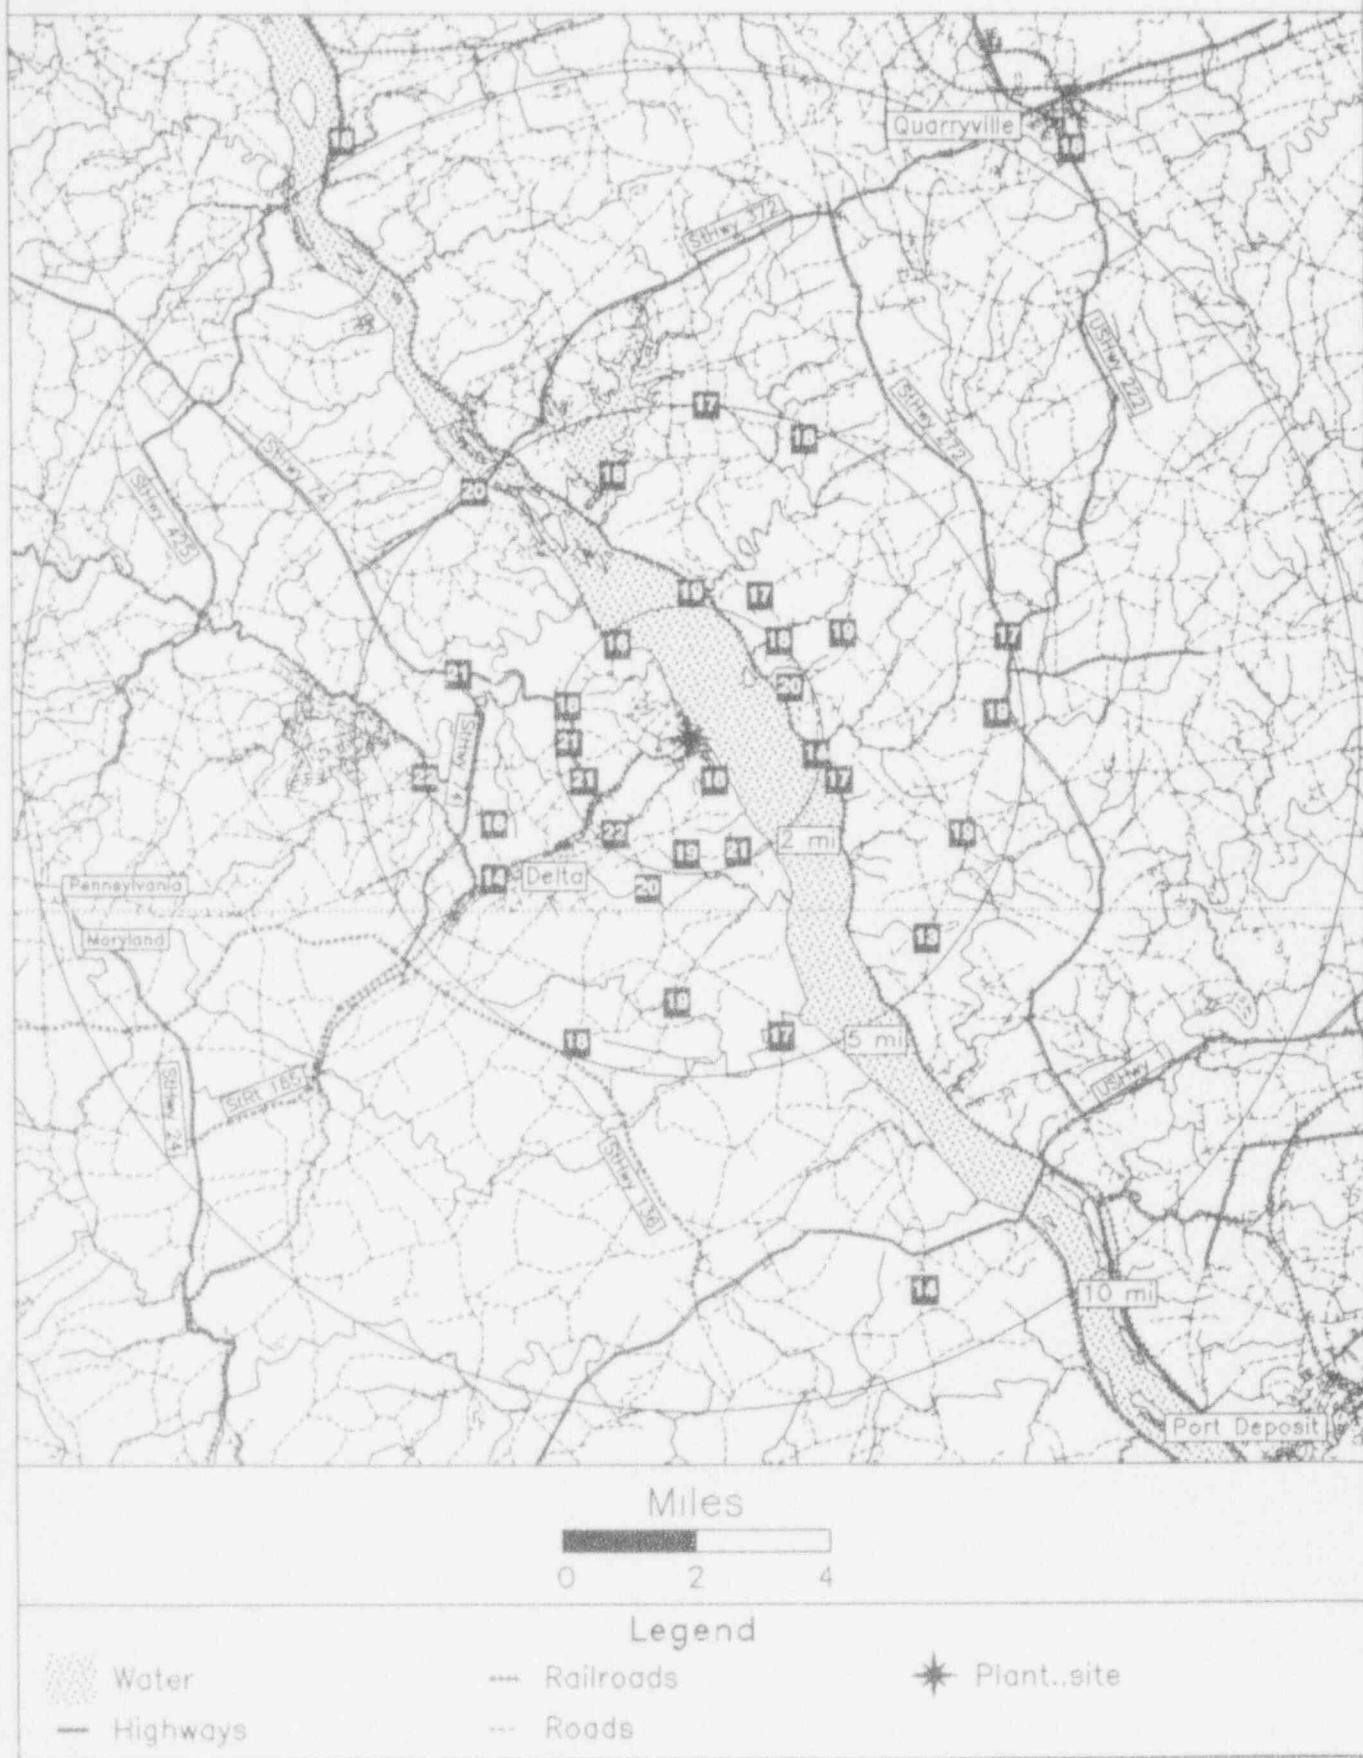

PERRY

TLD Direct Radiation Environmental Monitoring
 For the period 930914-940202 142 Days
 Field Time: 106 Days

NRC Sta	Location	Gross Exposure (mR) --Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) --Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	72	5.0	20.1 +- 0.6; 3.0	16.2 +- 2.1
3	88	5.5	20.7 +- 0.6; 3.1	16.2 +- 2.1
4	112	6.0	21.6 +- 0.6; 3.2	17.1 +- 2.2
5	130	4.0	21.4 +- 0.6; 3.2	16.9 +- 2.4
6	155	5.0	23.1 +- 0.7; 3.5	19.9 +- 1.6
7	178	5.2	22.2 +- 0.7; 3.3	17.7 +- 1.9
8	205	4.6	22.7 +- 0.7; 3.4	17.5 +- 3.5
9	220	5.2	21.2 +- 0.6; 3.2	16.2 +- 2.0
10	225	7.4	20.6 +- 0.6; 3.1	17.6 +- 2.1
11	240	5.8	24.0 +- 0.7; 3.6	18.9 +- 2.2
12	225	19.0	21.8 +- 0.7; 3.3	16.6 +- 2.4
13	225	19.0	20.6 +- 0.6; 3.1	16.0 +- 2.3
14	212	12.0	26.5 +- 0.8; 4.0	22.0 +- 2.3
15	248	1.4	20.6 +- 0.6; 3.1	16.1 +- 2.2
16	225	0.8	18.3 +- 0.5; 2.7	16.2 +- 3.2
17	205	0.7	19.7 +- 0.6; 3.0	14.2 +- 2.0
18	180	0.8	19.6 +- 0.6; 2.9	15.6 +- 2.3
19	152	1.8	19.2 +- 0.6; 2.9	16.5 +- 2.3
20	123	1.6	17.5 +- 0.5; 2.6	14.5 +- 2.1
21	105	1.4	20.4 +- 0.6; 3.1	14.9 +- 2.1
22	85	1.2	18.8 +- 0.6; 2.8	16.6 +- 3.3
23	65	1.4	20.5 +- 0.6; 3.1	16.4 +- 2.3
24	40	0.6	20.7 +- 0.6; 3.1	15.6 +- 2.3
25	40	0.6	24.5 +- 0.7; 3.7	18.0 +- 3.7
26	182	2.8	19.6 +- 0.6; 2.9	16.9 +- 3.2
27	175	2.8	18.1 +- 0.5; 2.7	16.9 +- 3.4

Transit Dose = 2.0 +- 0.3; 3.2

PERRY

For the period 930914-940202

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	No Data +- No Data	0
11.26 - 33.75 NNE	No Data +- No Data	0
33.76 - 56.25 NE	17.5 +- 2.3	2
56.26 - 78.75 ENE	15.5 +- 0.2	2
78.76 - 101.25 E	15.1 +- 1.1	2
101.26 - 123.75 ESE	15.1 +- 1.8	3
123.76 - 146.25 SE	16.4 +- 0.0	1
146.26 - 168.75 SSE	16.2 +- 2.3	2
168.76 - 191.25 S	15.1 +- 1.4	4
191.26 - 213.75 SSW	16.3 +- 1.8	2
213.76 - 236.25 SW	15.3 +- 1.3	3
236.26 - 258.75 WSW	17.2 +- 2.0	2
258.76 - 281.25 W	No Data +- No Data	0
281.26 - 303.75 WNW	No Data +- No Data	0
303.76 - 326.25 NW	No Data +- No Data	0
326.26 - 348.75 NNW	No Data +- No Data	0

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	15.2 +- 1.5	11
2 - 5	15.9 +- 1.6	6
> 5	16.7 +- 1.1	6
Upwind Control	17.8 +- 2.7	3

PERRY
 TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	72	CHAPEL ACROSS FROM REDBIRD RD.
3	88	HUBBARD RD.-NEAR RT. 20
4	112	HUBBARD RD (LAKE ST) NEAR RT 84
5	130	WOOD & S. RIDGE RD (RT 84)
6	155	TURNEY & RIVER RD
7	178	WEBB & RIVER RD
8	205	LANE RD AT RR TRACKS
9	220	HALE & LEE RDS(NEAR SCH.)
10	225	FORBES ST-PAINESVILLE NEAR RT 20
11	240	HARDY RD BY LAKE ERIE
12	225	ST CLAIR INTL. HYDRA. PARKING LOT
13	225	ST CLAIR INTL. HYDRA. PARKING LOT
14	212	AUBURN-CONCORD RDS
15	248	PARMLY RD PARK BY L. ERIE
16	225	PARMLY RD ACROSS FM SUBSTATION
17	205	PARMLY RD ACROSS FR TEST FAC.
18	180	PARMLY RD ENTRANCE TO PARK LOT
19	152	RT 20 NEAR PARMLY RD
20	123	RT 20 - ANTIOCH RD
21	105	2941 ANTIOCH RD (HOME)
22	85	2828 ANTIOCH RD (HOME)
23	65	ANTIOCH RD
24	40	END LOCKWOOD CIR.
25	40	LOCKWOOD RD
26	182	3911 CENTER RD - PERRY
27	175	4274 MANCHESTER ST - PERRY

NRC TLD DOSES FOR PERRY AREA

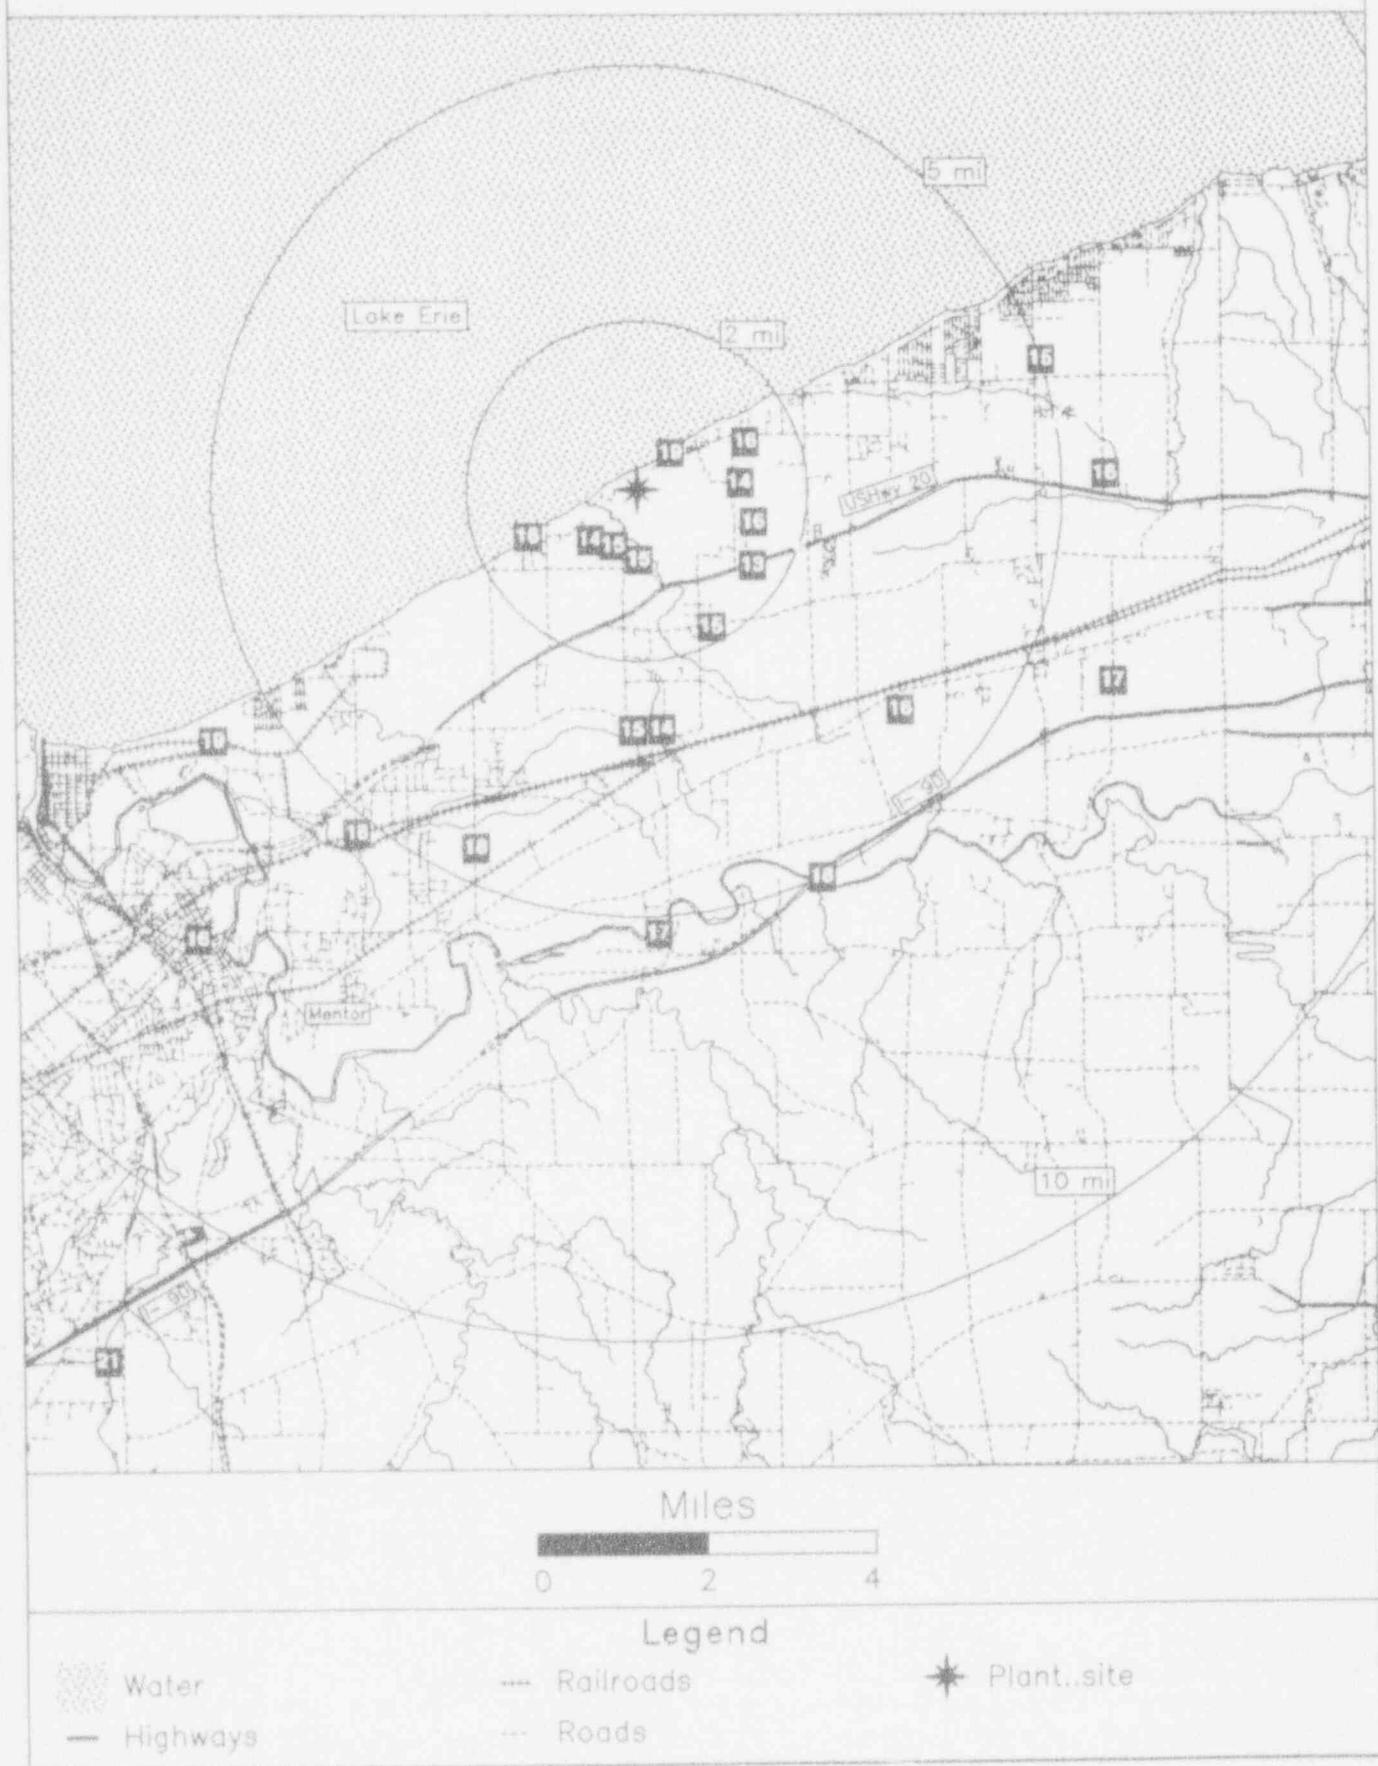

PILGRIM

TLD Direct Radiation Environmental Monitoring
 For the period 930915-940203 142 Days
 Field Time: 90 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	288	0.1	125.6 +- 3.8; 18.8	No Net Data
2	310	0.2	28.6 +- 0.9; 4.3	No Net Data
5	289	0.7	28.1 +- 0.8; 4.2	No Net Data
6	261	1.7	26.0 +- 0.8; 3.9	No Net Data
7	270	0.5	29.0 +- 0.9; 4.4	No Net Data
8	247	0.3	28.3 +- 0.8; 4.2	No Net Data
9	224	0.3	28.4 +- 0.9; 4.3	No Net Data
10	205	0.3	30.2 +- 0.9; 4.5	No Net Data
11	184	0.3	32.0 +- 1.0; 4.8	No Net Data
12	159	0.4	27.2 +- 0.8; 4.1	No Net Data
13	146	0.7	23.7 +- 0.7; 3.6	No Net Data
14	155	1.0	27.0 +- 0.8; 4.0	No Net Data
16	136	1.3	24.1 +- 0.7; 3.6	No Net Data
18	212	0.8	24.2 +- 0.7; 3.6	No Net Data
19	232	1.0	25.0 +- 0.7; 3.7	No Net Data
21	256	1.6	23.7 +- 0.7; 3.6	No Net Data
22	130	2.5	24.7 +- 0.7; 3.7	No Net Data
23	146	3.4	25.9 +- 0.8; 3.9	No Net Data
25	168	1.5	26.5 +- 0.8; 4.0	No Net Data
26	180	1.3	23.1 +- 0.7; 3.5	No Net Data
27	231	1.8	23.5 +- 0.7; 3.5	No Net Data
30	153	2.2	28.5 +- 0.9; 4.3	No Net Data
31	179	2.5	24.9 +- 0.7; 3.7	No Net Data
32	217	2.6	22.7 +- 0.7; 3.4	No Net Data
33	234	2.5	24.2 +- 0.7; 3.6	No Net Data
37	264	4.2	25.3 +- 0.8; 3.8	No Net Data
38	152	3.5	23.2 +- 0.7; 3.5	No Net Data
39	155	5.3	23.0 +- 0.7; 3.5	No Net Data
40	272	4.6	26.3 +- 0.8; 3.9	No Net Data
42	281	4.6	24.7 +- 0.7; 3.7	No Net Data
43	291	5.8	26.5 +- 0.8; 4.0	No Net Data
45	197	6.0	24.4 +- 0.7; 3.7	No Net Data
47	301	26.0	28.0 +- 0.8; 4.2	No Net Data
48	301	26.0	29.6 +- 0.9; 4.4	No Net Data
49	301	26.0	26.1 +- 0.8; 3.9	No Net Data

No Transit Dose Calculated. (Transit Control Is Damaged.)

PILGRIM

For the period 930915-940203

TLD Direct Radiation Environmental Monitoring

Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	No Data +- No Data	0
11.26 - 33.75 NNE	No Data +- No Data	0
33.76 - 56.25 NE	No Data +- No Data	0
56.26 - 78.75 ENE	No Data +- No Data	0
78.76 - 101.25 E	No Data +- No Data	0
101.26 - 123.75 ESE	No Data +- No Data	0
123.76 - 146.25 SE	15.6 +- 0.6	4
146.26 - 168.75 SSE	16.4 +- 1.4	6
168.76 - 191.25 S	16.9 +- 3.0	3
191.26 - 213.75 SSW	16.6 +- 2.2	3
213.76 - 236.25 SW	15.7 +- 1.4	5
236.26 - 258.75 WSW	16.5 +- 2.0	2
258.76 - 281.25 W	16.6 +- 1.1	5
281.26 - 303.75 WNW	38.1 +- 36.0	3
303.76 - 326.25 NW	18.1 +- 0.0	1
326.26 - 348.75 NNW	No Data +- No Data	0


Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	20.2 +- 14.5	19
2 - 5	15.9 +- 1.0	10
> 5	15.6 +- 1.1	3
Upwind Control	17.7 +- 1.1	3

PILGRIM

TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	288	0.1
2	310	0.2
5	289	0.7
6	261	1.7
7	270	0.5
8	247	0.3
9	224	0.3
10	205	0.3
11	184	0.3
12	159	0.4
13	146	0.7
14	155	1.0
16	136	1.3
18	212	0.8
19	232	1.0
21	256	1.6
22	130	2.5
23	146	3.4
25	168	1.5
26	180	1.3
27	231	1.8
30	153	2.2
31	179	2.5
32	217	2.6
33	234	2.5
37	264	4.2
38	152	3.5
39	155	5.3
40	272	4.6
42	281	4.6
43	291	5.8
45	197	6.0
47	301	26.0
48	301	26.0
49	301	26.0

NRC TLD DOSES FOR PILGRIM AREA

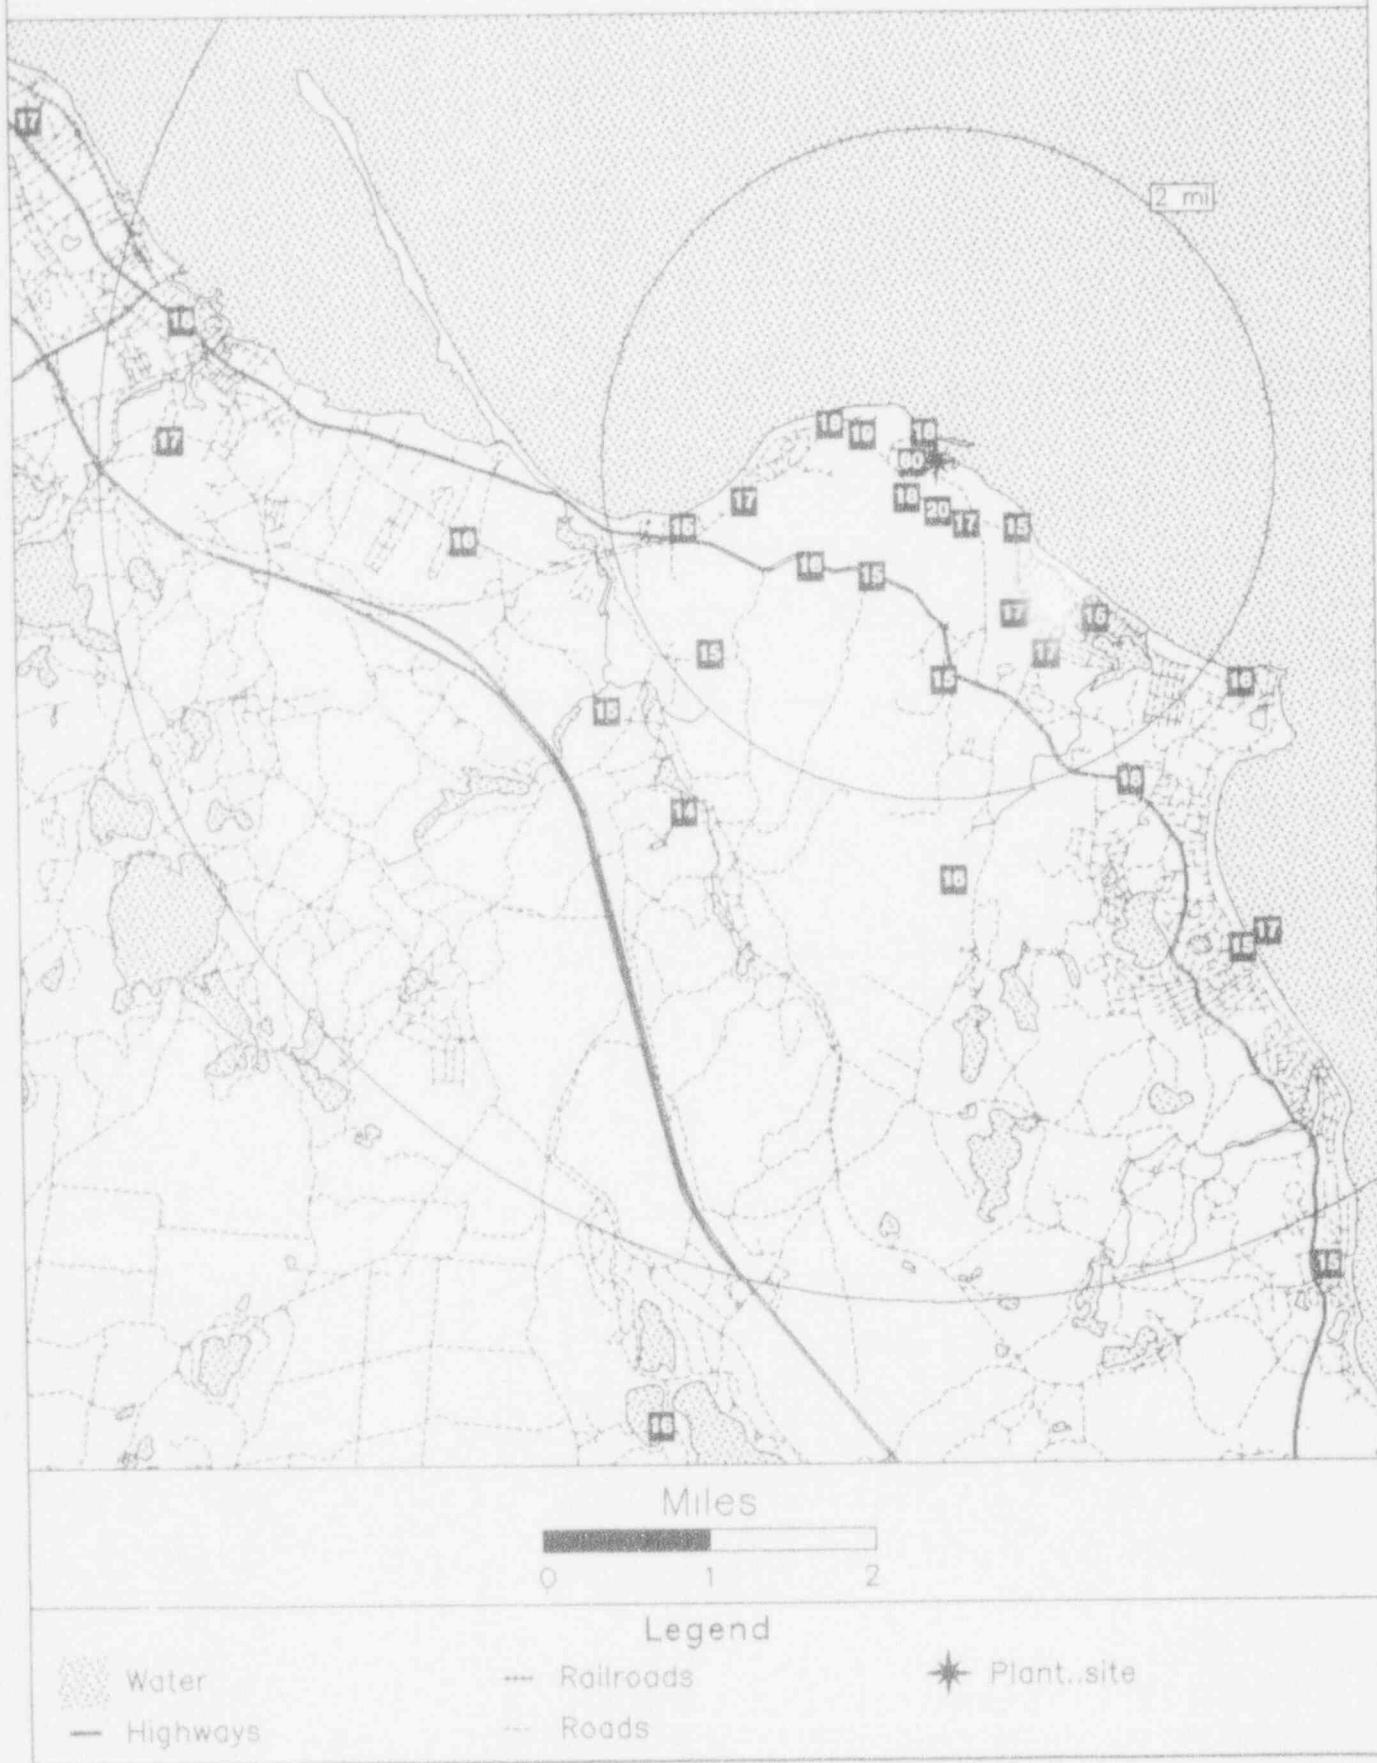

PRAIRIE ISLAND

TLD Direct Radiation Environmental Monitoring
 For the period 930913-940208 149 Days
 Field Time: 105 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	312 16.5	21.3 +- 0.6; 3.2	15.1 +- 0.6; 4.0	17.7 +- 2.2
2	310 15.0	22.0 +- 0.7; 3.3	15.7 +- 0.6; 4.0	16.9 +- 2.1
3	310 15.0	21.5 +- 0.6; 3.2	15.2 +- 0.6; 4.0	17.0 +- 2.3
4	308 5.5	24.1 +- 0.7; 3.6	17.5 +- 0.7; 4.2	17.5 +- 1.9
5	297 4.1	22.4 +- 0.7; 3.4	16.0 +- 0.7; 4.1	16.1 +- 1.9
6	287 1.3	20.6 +- 0.6; 3.1	14.4 +- 0.6; 3.9	16.8 +- 2.2
7	313 0.8	20.8 +- 0.6; 3.1	14.6 +- 0.6; 3.9	15.1 +- 1.8
8	244 0.5	22.8 +- 0.7; 3.4	16.3 +- 0.7; 4.1	16.3 +- 1.9
9	194 0.6	22.8 +- 0.7; 3.4	16.4 +- 0.7; 4.1	16.7 +- 1.6
10	155 0.5	24.3 +- 0.7; 3.7	17.7 +- 0.7; 4.2	17.4 +- 1.8
11	129 1.6	21.6 +- 0.6; 3.2	15.3 +- 0.6; 4.0	15.6 +- 1.7
12	153 1.4	22.7 +- 0.7; 3.4	16.3 +- 0.7; 4.1	16.4 +- 1.6
13	217 0.6	23.6 +- 0.7; 3.5	17.0 +- 0.7; 4.2	16.8 +- 1.8
14	178 0.8	23.8 +- 0.7; 3.6	17.2 +- 0.7; 4.2	16.6 +- 1.8
15	272 1.9	21.1 +- 0.6; 3.2	14.9 +- 0.6; 3.9	15.8 +- 1.9
16	262 4.6	24.6 +- 0.7; 3.7	17.9 +- 0.7; 4.3	17.9 +- 2.4
17	250 4.3	23.7 +- 0.7; 3.6	17.1 +- 0.7; 4.2	17.4 +- 1.9
18	225 4.1	27.0 +- 0.8; 4.0	19.9 +- 0.8; 4.5	17.7 +- 3.1
19	233 6.7	20.6 +- 0.6; 3.1	14.5 +- 0.6; 3.9	15.5 +- 2.0
20	200 4.9	26.3 +- 0.8; 3.9	19.3 +- 0.7; 4.4	18.6 +- 2.1
21	187 4.7	26.4 +- 0.8; 4.0	19.4 +- 0.7; 4.4	19.1 +- 2.2
22	160 4.4	24.0 +- 0.7; 3.6	17.4 +- 0.7; 4.2	17.5 +- 2.1
23	140 4.7	26.0 +- 0.8; 3.9	19.1 +- 0.7; 4.4	18.0 +- 2.0
24	131 6.6	25.2 +- 0.8; 3.8	18.5 +- 0.7; 4.3	17.4 +- 2.0
25	117 4.9	22.8 +- 0.7; 3.4	16.4 +- 0.7; 4.1	16.3 +- 1.9
26	88 1.9	22.7 +- 0.7; 3.4	16.3 +- 0.7; 4.1	16.8 +- 1.8
27	69 1.8	23.6 +- 0.7; 3.5	17.0 +- 0.7; 4.2	16.8 +- 2.2
28	47 1.6	Damaged Dosimeter	No Net Data	17.1 +- 2.2
29	19 1.5	22.7 +- 0.7; 3.4	16.2 +- 0.7; 4.1	15.9 +- 2.0
30	356 1.9	23.3 +- 0.7; 3.5	16.8 +- 0.7; 4.1	16.3 +- 2.2
31	346 2.4	25.9 +- 0.8; 3.9	19.0 +- 0.7; 4.4	18.3 +- 2.1
32	340 3.8	26.3 +- 0.8; 3.9	19.3 +- 0.7; 4.4	19.2 +- 2.1
33	8 4.6	26.5 +- 0.8; 4.0	19.5 +- 0.8; 4.5	19.1 +- 2.0
34	17 4.7	26.5 +- 0.8; 4.0	19.5 +- 0.8; 4.5	18.9 +- 2.2
35	45 11.0	22.9 +- 0.7; 3.4	16.5 +- 0.7; 4.1	16.9 +- 1.8
36	48 4.7	26.3 +- 0.8; 3.9	19.4 +- 0.7; 4.4	18.7 +- 2.1
37	61 4.2	25.6 +- 0.8; 3.8	18.7 +- 0.7; 4.4	19.0 +- 1.9
38	86 4.9	25.4 +- 0.8; 3.8	18.6 +- 0.7; 4.3	18.7 +- 2.1
39	107 9.1	22.1 +- 0.7; 3.3	15.8 +- 0.7; 4.0	16.5 +- 1.9
40	111 3.7	22.0 +- 0.7; 3.3	15.7 +- 0.6; 4.0	16.5 +- 1.8

Transit Dose = 3.7 +- 0.4; 3.3

PRAIRIE ISLAND

For the period 930913-940208

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	18.2 +- 1.9	2
11.26 - 33.75 NNE	17.9 +- 2.3	2
33.76 - 56.25 NE	17.9 +- 2.0	2
56.26 - 78.75 ENE	17.9 +- 1.2	2
78.76 - 101.25 E	17.4 +- 1.6	2
101.26 - 123.75 ESE	15.9 +- 0.4	3
123.76 - 146.25 SE	17.6 +- 2.0	3
146.26 - 168.75 SSE	17.1 +- 0.7	3
168.76 - 191.25 S	18.3 +- 1.6	2
191.26 - 213.75 SSW	17.9 +- 2.1	2
213.76 - 236.25 SW	17.2 +- 2.7	3
236.26 - 258.75 WSW	16.7 +- 0.6	2
258.76 - 281.25 W	16.4 +- 2.1	2
281.26 - 303.75 WNW	15.2 +- 1.1	2
303.76 - 326.25 NW	16.1 +- 2.0	2
326.26 - 348.75 NNW	19.2 +- 0.2	2

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	16.2 +- 1.0	14
2 - 5	18.4 +- 1.4	17
> 5	16.5 +- 1.5	5
Upwind Control	15.3 +- 0.3	3

PRAIRIE ISLAND
TLD Direct Radiation Environmental Monitoring

NRC Station	Location	Azimuth / Distance	Description
		Degree / Mile	
1	312	16.5	HASTINGS (MN)
2	310	15.0	HASTINGS (MN)
3	310	15.0	HASTINGS (MN)
4	308	5.5	COUNTY RD. 18
5	297	4.1	COUNTY RD. 18
6	287	1.3	COUNTY RD. 18
7	313	0.8	COUNTY RD. 18/RD. TO RESERVATION
8	244	0.5	COUNTY RD. 18
9	194	0.6	COUNTY RD. 18
10	155	0.5	SUTER RESIDENCE
11	129	1.6	LOCK & DAM 3
12	153	1.4	COUNTY RD. 18
13	217	0.6	COUNTY RD. 18
14	178	0.8	COUNTY RD. 18
15	272	1.9	SOUTH ACCESS RD.
16	262	4.6	NW OF US. 61/COUNTY RD. 18
17	250	4.3	U.S. 61
18	225	4.1	Y - INTERSECT. SECTIONS 13/14/23/24 ADJOIN
19	233	6.7	COUNTY RD. 7 IN WELCH
20	200	4.9	LEESON LANE
21	187	4.7	T - INTERSECTION BETWEEN SECTIONS 29 & 32
22	160	4.4	COUNTY RD. 53
23	140	4.7	TYLER RD.
24	131	6.6	RED WING (CITY HALL)
25	117	4.9	TIMBRLANE RD.
26	88	1.9	LOWER RIVER RD.
27	69	1.8	LOWER RIVER RD.
28	47	1.6	LOWER RIVER RD.
29	19	1.5	LOWER RIVER RD.
30	356	1.9	LOWER RIVER RD.
31	345	2.4	WIND RIVER RD.
32	340	3.8	HOLST RD./AVERY AVE.
33	8	4.6	OAK RIDGE RD./SPRING GREEN RD.
34	17	4.7	COUNTY RD OO
35	45	11.0	ELLSWORTH (WI)
36	48	4.7	COUNTY RD. K
37	61	4.2	NELSON DR.
38	86	4.9	FISHER COULEE RD.
39	107	9.1	HWY. 35 (WI)
40	111	3.7	COUNTY RD. K

NRC TLD DOSES FOR PRAIRIE ISLAND AREA

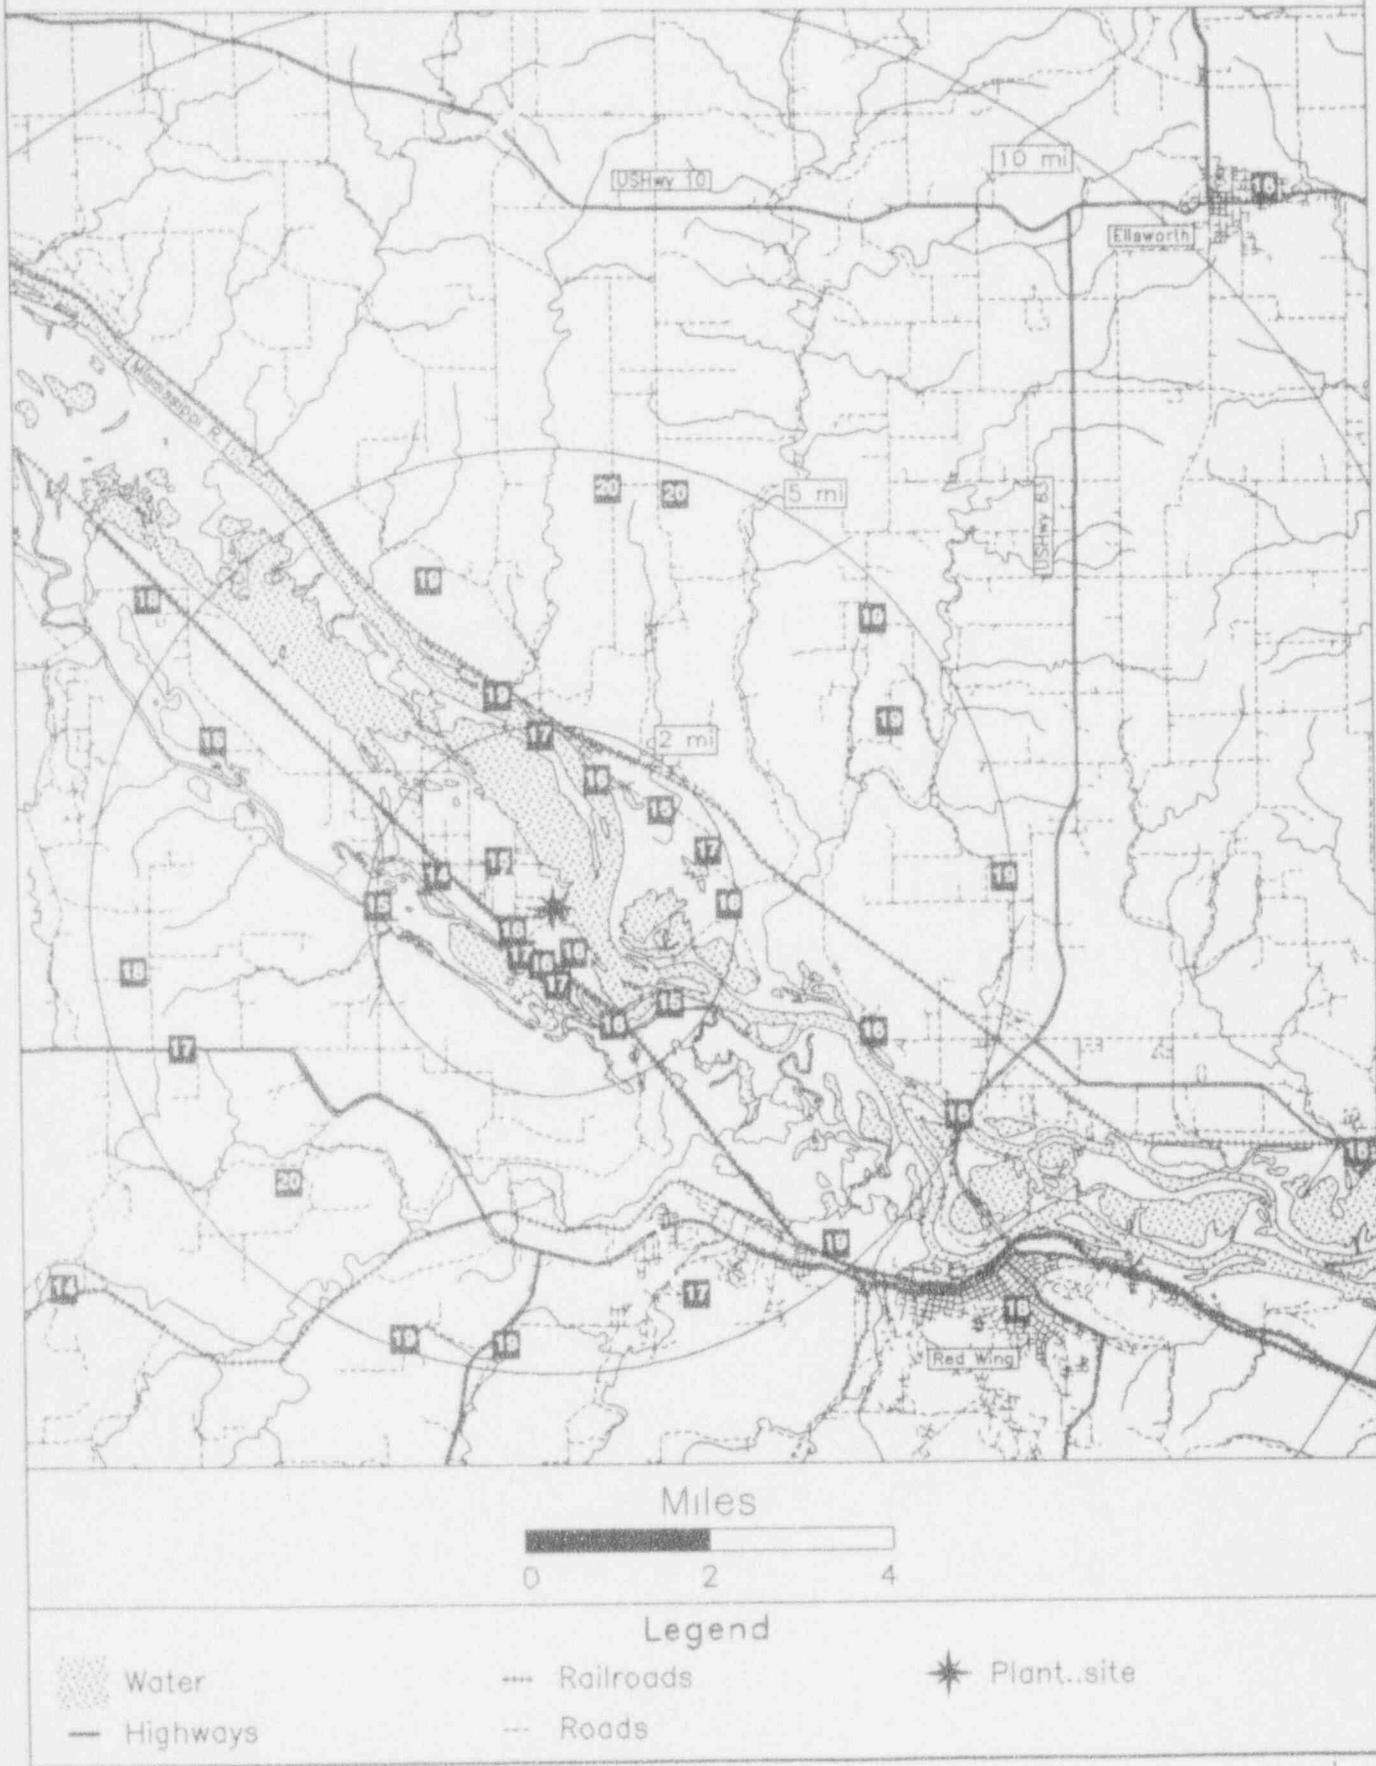

QUAD CITIES

TLD Direct Radiation Environmental Monitoring
 For the period 930913-940201 142 Days
 Field Time: 99 Days

NRC Sta	Location	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
	Azimuth/Dist (Deg)/(Mi)			
1	3	0.7 18.1 +- 0.5; 2.7	13.8 +- 0.6; 3.8	15.0 +- 1.6
2	16	1.2 21.5 +- 0.6; 3.2	16.9 +- 0.7; 4.1	17.4 +- 2.2
3	35	1.7 19.7 +- 0.6; 3.0	15.2 +- 0.6; 3.9	15.1 +- 1.6
4	45	1.1 20.6 +- 0.6; 3.1	16.0 +- 0.6; 4.0	15.9 +- 1.6
5	90	0.8 21.3 +- 0.6; 3.2	16.6 +- 0.7; 4.1	15.6 +- 1.7
6	138	1.1 22.1 +- 0.7; 3.3	17.4 +- 0.7; 4.1	16.2 +- 1.7
7	175	1.8 20.5 +- 0.6; 3.1	15.9 +- 0.6; 4.0	16.3 +- 1.8
8	165	2.0 21.8 +- 0.7; 3.3	17.1 +- 0.7; 4.1	16.4 +- 1.5
9	186	3.1 20.3 +- 0.6; 3.0	15.7 +- 0.6; 4.0	15.9 +- 1.5
10	188	7.7 16.6 +- 0.5; 2.5	12.4 +- 0.5; 3.6	16.2 +- 4.6
11	156	4.2 22.1 +- 0.7; 3.3	17.4 +- 0.7; 4.1	16.8 +- 1.7
12	142	4.8 21.9 +- 0.7; 3.3	17.2 +- 0.7; 4.1	16.5 +- 1.9
13	123	3.3 21.4 +- 0.6; 3.2	16.7 +- 0.7; 4.1	16.2 +- 1.7
14	122	2.0 19.0 +- 0.6; 2.9	14.6 +- 0.6; 3.8	15.0 +- 1.8
15	86	2.8 21.2 +- 0.6; 3.2	16.6 +- 0.7; 4.0	17.2 +- 1.7
16	57	4.4 24.8 +- 0.7; 3.7	19.8 +- 0.7; 4.4	19.0 +- 1.7
17	48	6.1 21.5 +- 0.6; 3.2	16.9 +- 0.7; 4.1	16.5 +- 1.6
18	39	9.4 20.2 +- 0.6; 3.0	15.7 +- 0.6; 3.9	15.7 +- 1.4
19	34	4.7 20.4 +- 0.6; 3.1	15.9 +- 0.6; 4.0	15.5 +- 1.7
20	16	4.3 21.8 +- 0.7; 3.3	17.1 +- 0.7; 4.1	16.6 +- 1.8
21	352	4.2 21.7 +- 0.6; 3.2	17.0 +- 0.7; 4.1	18.7 +- 2.9
22	328	4.1 23.7 +- 0.7; 3.5	18.8 +- 0.7; 4.3	18.6 +- 1.8
23	337	5.7 23.5 +- 0.7; 3.5	18.6 +- 0.7; 4.3	17.0 +- 1.7
24	310	4.4 23.2 +- 0.7; 3.5	18.4 +- 0.7; 4.2	18.3 +- 1.9
25	295	4.1 21.4 +- 0.6; 3.2	16.8 +- 0.7; 4.1	16.3 +- 1.8
26	278	6.9 18.8 +- 0.6; 2.8	14.4 +- 0.6; 3.8	14.4 +- 1.7
27	260	4.3 21.8 +- 0.7; 3.3	17.1 +- 0.7; 4.1	16.2 +- 1.9
28	253	4.0 21.5 +- 0.6; 3.2	16.8 +- 0.7; 4.1	16.7 +- 1.8
29	352	2.8 22.7 +- 0.7; 3.4	17.9 +- 0.7; 4.2	17.5 +- 1.8
30	335	1.9 21.6 +- 0.6; 3.2	16.9 +- 0.7; 4.1	17.1 +- 1.7
31	305	2.6 21.0 +- 0.6; 3.1	16.4 +- 0.6; 4.0	17.3 +- 2.2
32	285	2.5 19.0 +- 0.6; 2.8	14.5 +- 0.6; 3.8	15.1 +- 2.4
33	257	2.0 21.5 +- 0.6; 3.2	16.9 +- 0.7; 4.1	16.7 +- 2.2
34	248	2.2 21.6 +- 0.6; 3.2	16.9 +- 0.7; 4.1	16.7 +- 1.6
35	229	2.6 19.9 +- 0.6; 3.0	15.4 +- 0.6; 3.9	15.8 +- 1.8
36	204	3.4 20.4 +- 0.6; 3.1	15.9 +- 0.6; 4.0	16.4 +- 2.4
37	194	9.3 20.5 +- 0.6; 3.1	15.9 +- 0.6; 4.0	16.7 +- 3.3
38	224	4.9 21.3 +- 0.6; 3.2	16.7 +- 0.7; 4.1	17.4 +- 2.0
39	301	14.0 19.7 +- 0.6; 3.0	15.2 +- 0.6; 3.9	15.6 +- 1.7
40	301	14.0 18.5 +- 0.6; 2.8	14.1 +- 0.6; 3.8	15.5 +- 1.9
41	301	14.0 19.3 +- 0.6; 2.9	14.8 +- 0.6; 3.9	15.0 +- 1.8

Transit Dose = 3.0 +- 0.3; 3.1

QUAD CITIES

For the period 930913-940201

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	16.2 +- 2.2	3
11.26 - 33.75 NNE	17.0 +- 0.2	2
33.76 - 56.25 NE	15.9 +- 0.6	5
56.26 - 78.75 ENE	19.8 +- 0.0	1
78.76 - 101.25 E	16.6 +- 0.0	2
101.26 - 123.75 ESE	15.7 +- 1.5	2
123.76 - 146.25 SE	17.3 +- 0.1	2
146.26 - 168.75 SSE	17.3 +- 0.2	2
168.76 - 191.25 S	14.7 +- 2.0	3
191.26 - 213.75 SSW	15.9 +- 0.0	2
213.76 - 236.25 SW	16.0 +- 0.9	2
236.26 - 258.75 WSW	16.9 +- 0.0	3
258.76 - 281.25 W	15.7 +- 1.9	2
281.26 - 303.75 WNW	15.7 +- 1.6	2
303.76 - 326.25 NW	17.4 +- 1.4	2
326.26 - 348.75 NNW	18.1 +- 1.1	3

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	16.1 +- 1.2	11
2 - 5	16.9 +- 1.2	21
> 5	15.6 +- 2.1	6
Upwind Control	14.7 +- 0.6	3

QUAD CITIES
TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Degree /	Distance Mile	Description
1	3	0.7	RIVER RD. ACROSS FROM MAILBOX #21124
2	16	1.2	RIVER RD. & 222ND AVE.
3	35	1.7	222 AVE. N. & HWY. 84
4	45	1.1	HWY. 84
5	90	0.8	HWY. 84
6	138	1.1	192 AVE. N. & 236 ST.
7	175	1.8	178 AVE. N. & HWY 84
8	165	2.0	236 ST. N. & 178 AVE. N.
9	186	3.1	CORDOVA WATER TOWER ON 9TH ST.
10	188	7.7	AGNES ST. & HWY. 84
11	156	4.2	COUNTY RD. BB (150 AVEN)
12	142	4.8	COUNTY RD. BB (150 AVEN)
13	123	3.3	266 ST. & 178 AVE. N.
14	122	2.0	192 AVE. N. & 250 ST. N.
15	86	2.8	206 AVE. N. & 266 ST. N.
16	57	4.4	MEREDOSIA RD.
17	48	6.1	PEARL ST. (4TH ST.) IN ALBANY
18	39	9.4	CLINTON (IA) IN NW. RR YARD ON 18TH PLACE
19	34	4.7	13TH AVE. AT RR CROSSING IN CAMANCHE (IA)
20	16	4.3	9TH ST. - 1.5 MI FROM 9TH AV. (RIGHT OFF US67)
21	352	4.2	CNTY Z40 & F21
22	328	4.1	365TH AVE PAST DRIVEWAY
23	337	5.7	4TH ST. (LOW MOOR)
24	310	4.4	GRAVEL RD. NEAR SMALL BARNS
25	295	4.1	COUNTY Z36 & 365TH AVE
26	278	6.9	COUNTY RD. Z30, AFTER "T" INTER (MCCAUSLAND)
27	260	4.3	2.5 MI. FROM COUNTY RD. F33 ON 260TH ST.
28	253	4.0	COUNTY RD. F33 ON 260TH ST.
29	352	2.8	U.S. 67 & 400TH AVE.
30	335	1.9	HANSON'S BOAT DOCKS OFF U.S. 67
31	305	2.6	U.S. 67
32	285	2.5	U.S. 67 (PAST FOLLETS)
33	257	2.0	PRINCETON WILDLIFE AREA OFF 286TH ST.
34	248	2.2	283RD AVE. & 280TH ST.
35	229	2.6	280TH ST.
36	204	3.4	RIVER DRIVE (288TH AVE.) AT END OF ROAD
37	194	9.3	U.S. 67 & HOLLAND ST. (LECLAIRE)
38	224	4.9	270TH AVE. & 257TH ST.
39	301	14.0	INDUSTRIAL STREET - DEWITT, IA
40	301	14.0	INDUSTRIAL STREET - DEWITT, IA
41	301	14.0	DIESEL GEN. STA. OFF U.S. 61, DEWITT, IA

NRC TLD DOSES FOR QUAD CITIES AREA

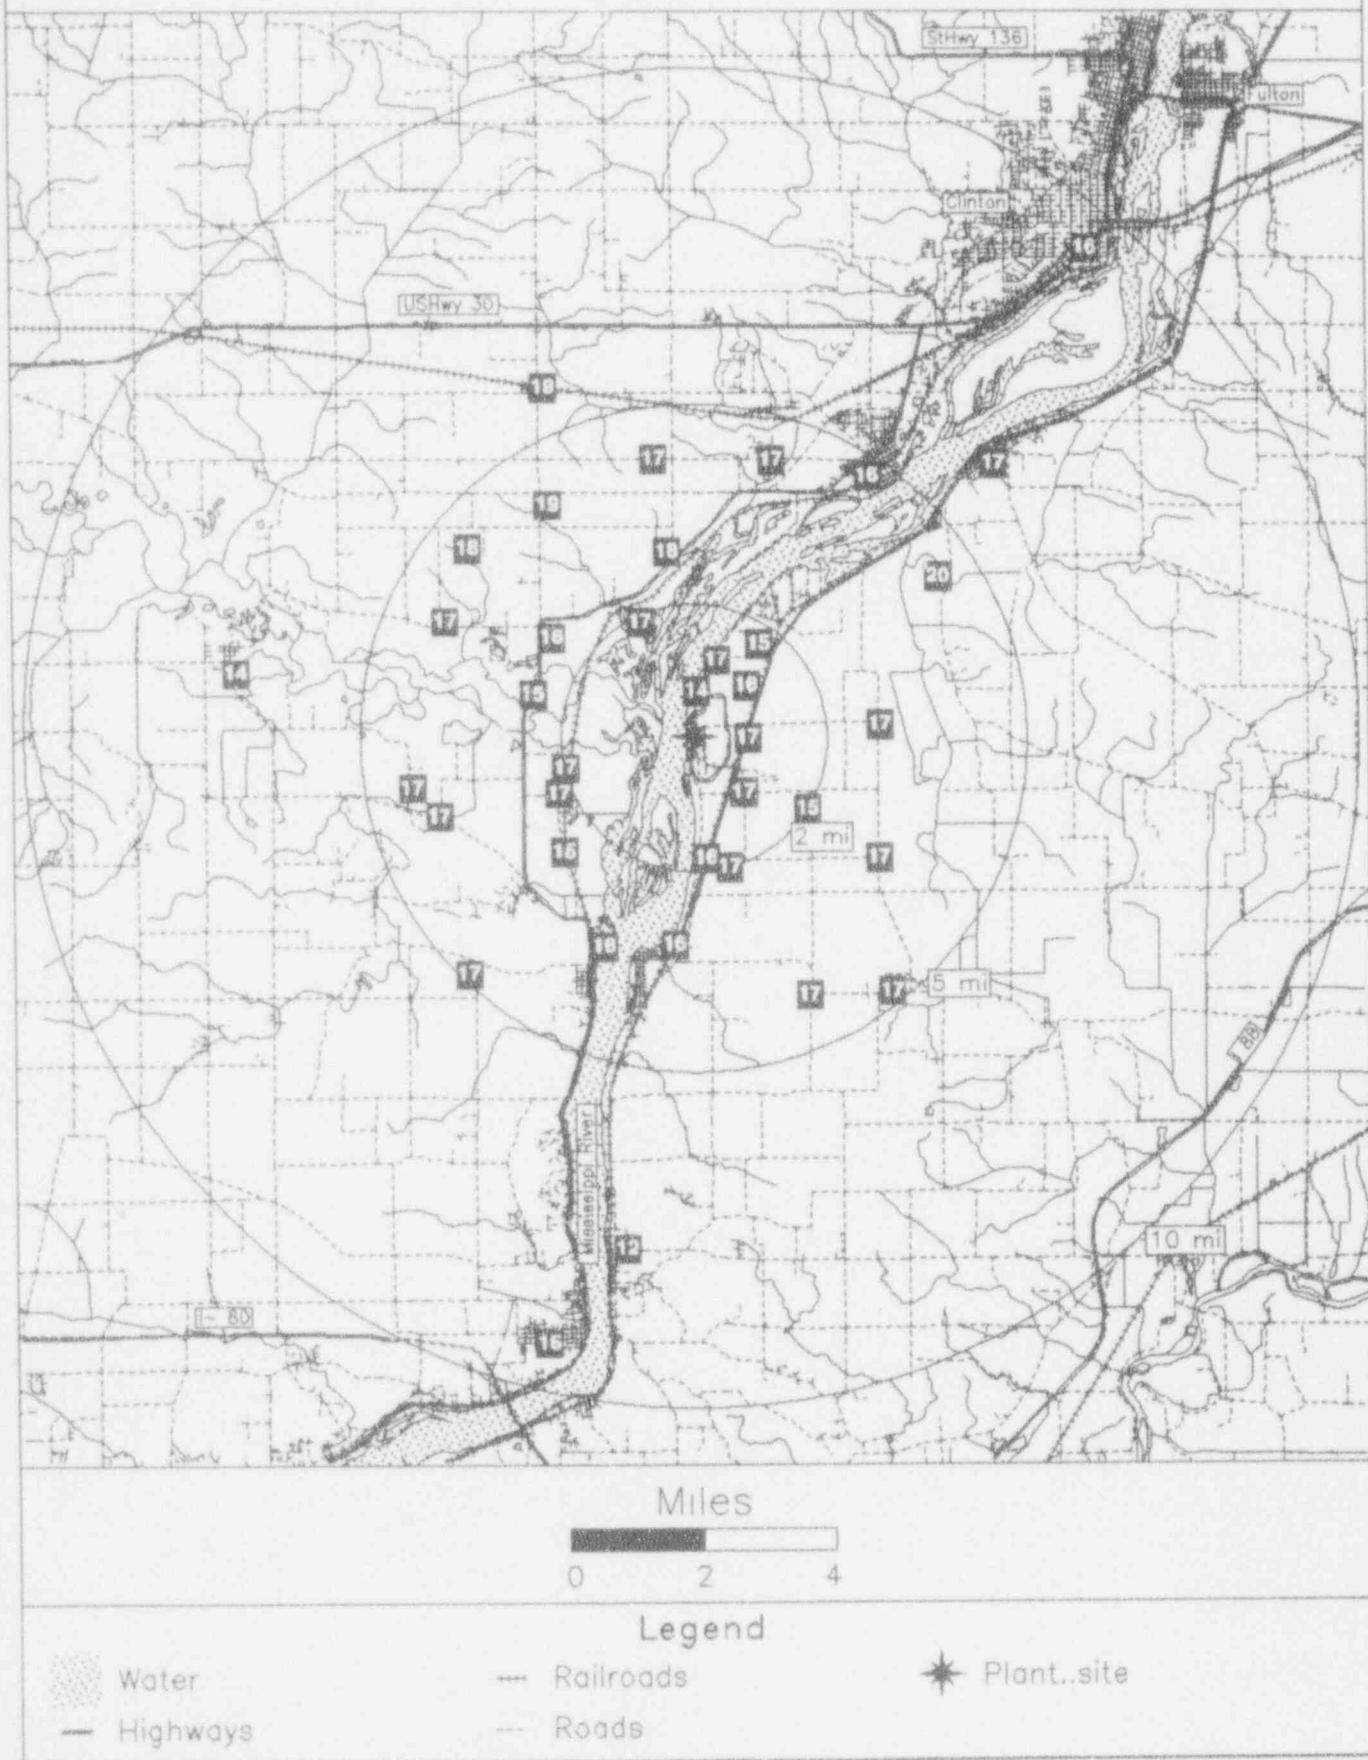

RANCHO SECO

TLD Direct Radiation Environmental Monitoring
 For the period 930913-940127 137 Days
 Field Time: 86 Days

NRC Sta	Location	Gross Exposure (mR)	Net Exposure Rate (mR/Std. Qtr.)	Hist. Range
	Azimuth/Dist (Deg)/(Mi)	+Rdm; Tot.	+Rdm; Tot.	Net Exp Rate +1 Std Dev
1	288	16.0	20.9 +- 0.6; 3.1	15.3 +- 0.8; 4.6
2	239	12.0	20.9 +- 0.6; 3.1	15.3 +- 0.8; 4.6
3	213	16.0	23.4 +- 0.7; 3.5	17.9 +- 0.8; 4.9
4	149	9.9	22.2 +- 0.7; 3.3	16.7 +- 0.8; 4.7
5	108	8.2	27.2 +- 0.8; 4.1	22.0 +- 1.0; 5.3
6	86	10.0	18.7 +- 0.6; 2.8	13.0 +- 0.7; 4.3
7	83	9.7	19.8 +- 0.6; 3.0	14.1 +- 0.7; 4.4
8	37	7.1	19.8 +- 0.6; 3.0	14.2 +- 0.7; 4.4
9	65	0.8	21.3 +- 0.6; 3.2	15.7 +- 0.8; 4.6
10	43	0.7	21.5 +- 0.6; 3.2	15.9 +- 0.8; 4.6
11	92	0.2	Damaged Dosimeter	No Net Data
12	131	1.6	19.7 +- 0.6; 3.0	14.1 +- 0.7; 4.4
13	358	0.6	24.0 +- 0.7; 3.6	18.5 +- 0.9; 4.9
14	323	0.7	21.5 +- 0.6; 3.2	16.0 +- 0.8; 4.6
15	151	0.7	19.6 +- 0.6; 2.9	13.9 +- 0.7; 4.4
16	219	0.9	21.8 +- 0.7; 3.3	16.2 +- 0.8; 4.7
17	245	1.5	21.8 +- 0.7; 3.3	16.3 +- 0.8; 4.7
18	254	2.3	20.9 +- 0.6; 3.1	15.3 +- 0.8; 4.6
19	323	7.0	22.4 +- 0.7; 3.4	16.9 +- 0.8; 4.7
20	309	6.3	21.6 +- 0.6; 3.2	16.0 +- 0.8; 4.6
21	279	5.7	20.8 +- 0.6; 3.1	15.2 +- 0.8; 4.5
22	244	6.4	22.3 +- 0.7; 3.3	16.8 +- 0.8; 4.7
23	217	4.6	21.5 +- 0.6; 3.2	15.9 +- 0.8; 4.6
24	350	11.0	21.4 +- 0.6; 3.2	15.9 +- 0.8; 4.6
25	318	17.0	21.6 +- 0.6; 3.2	16.1 +- 0.8; 4.6
26	311	22.0	Missing Dosimeter	No Net Data
27	306	27.0	20.9 +- 0.6; 3.1	15.3 +- 0.8; 4.6
28	306	27.0	21.3 +- 0.6; 3.2	15.8 +- 0.8; 4.6
29	306	27.0	21.6 +- 0.6; 3.2	16.0 +- 0.8; 4.6
30	306	27.0	22.4 +- 0.7; 3.4	16.9 +- 0.8; 4.7

Transit Dose = 6.3 +- 0.4; 3.0

RANCHO SECO
For the period 930913-940127

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	17.2 +- 1.9	2
11.26 - 33.75 NNE	No Data +- No Data	0
33.76 - 56.25 NE	15.1 +- 1.2	2
56.26 - 78.75 ENE	15.7 +- 0.0	1
78.76 - 101.25 E	13.6 +- 0.8	2
101.26 - 123.75 ESE	22.0 +- 0.0	1
123.76 - 146.25 SE	14.1 +- 0.0	1
146.26 - 168.75 SSE	15.3 +- 1.9	2
168.76 - 191.25 S	No Data +- No Data	0
191.26 - 213.75 SSW	17.9 +- 0.0	1
213.76 - 236.25 SW	16.1 +- 0.2	2
236.26 - 258.75 WSW	15.9 +- 0.8	4
258.76 - 281.25 W	15.2 +- 0.0	1
281.26 - 303.75 WNW	15.3 +- 0.0	1
303.76 - 326.25 NW	16.3 +- 0.5	6
326.26 - 348.75 NNW	No Data +- No Data	0

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	15.8 +- 1.4	8
2 - 5	15.6 +- 0.4	2
> 5	16.1 +- 2.0	16
Upwind Control	15.5 +- 0.4	2

RANCHO SECO
TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	288	16.0
2	239	12.0
3	213	16.0
4	149	9.9
5	108	8.2
6	86	10.0
7	83	9.7
8	37	7.1
9	65	0.8
10	43	0.7
11	92	0.2
12	131	1.6
13	358	0.6
14	323	0.7
15	151	0.7
16	219	0.9
17	245	1.5
18	254	2.3
19	323	7.0
20	309	6.3
21	279	5.7
22	244	6.4
23	217	4.6
24	350	11.0
25	318	17.0
26	311	22.0
27	306	27.0
28	306	27.0
29	306	27.0
30	306	27.0

NRC TLD DOSES FOR RANCHO SECO AREA

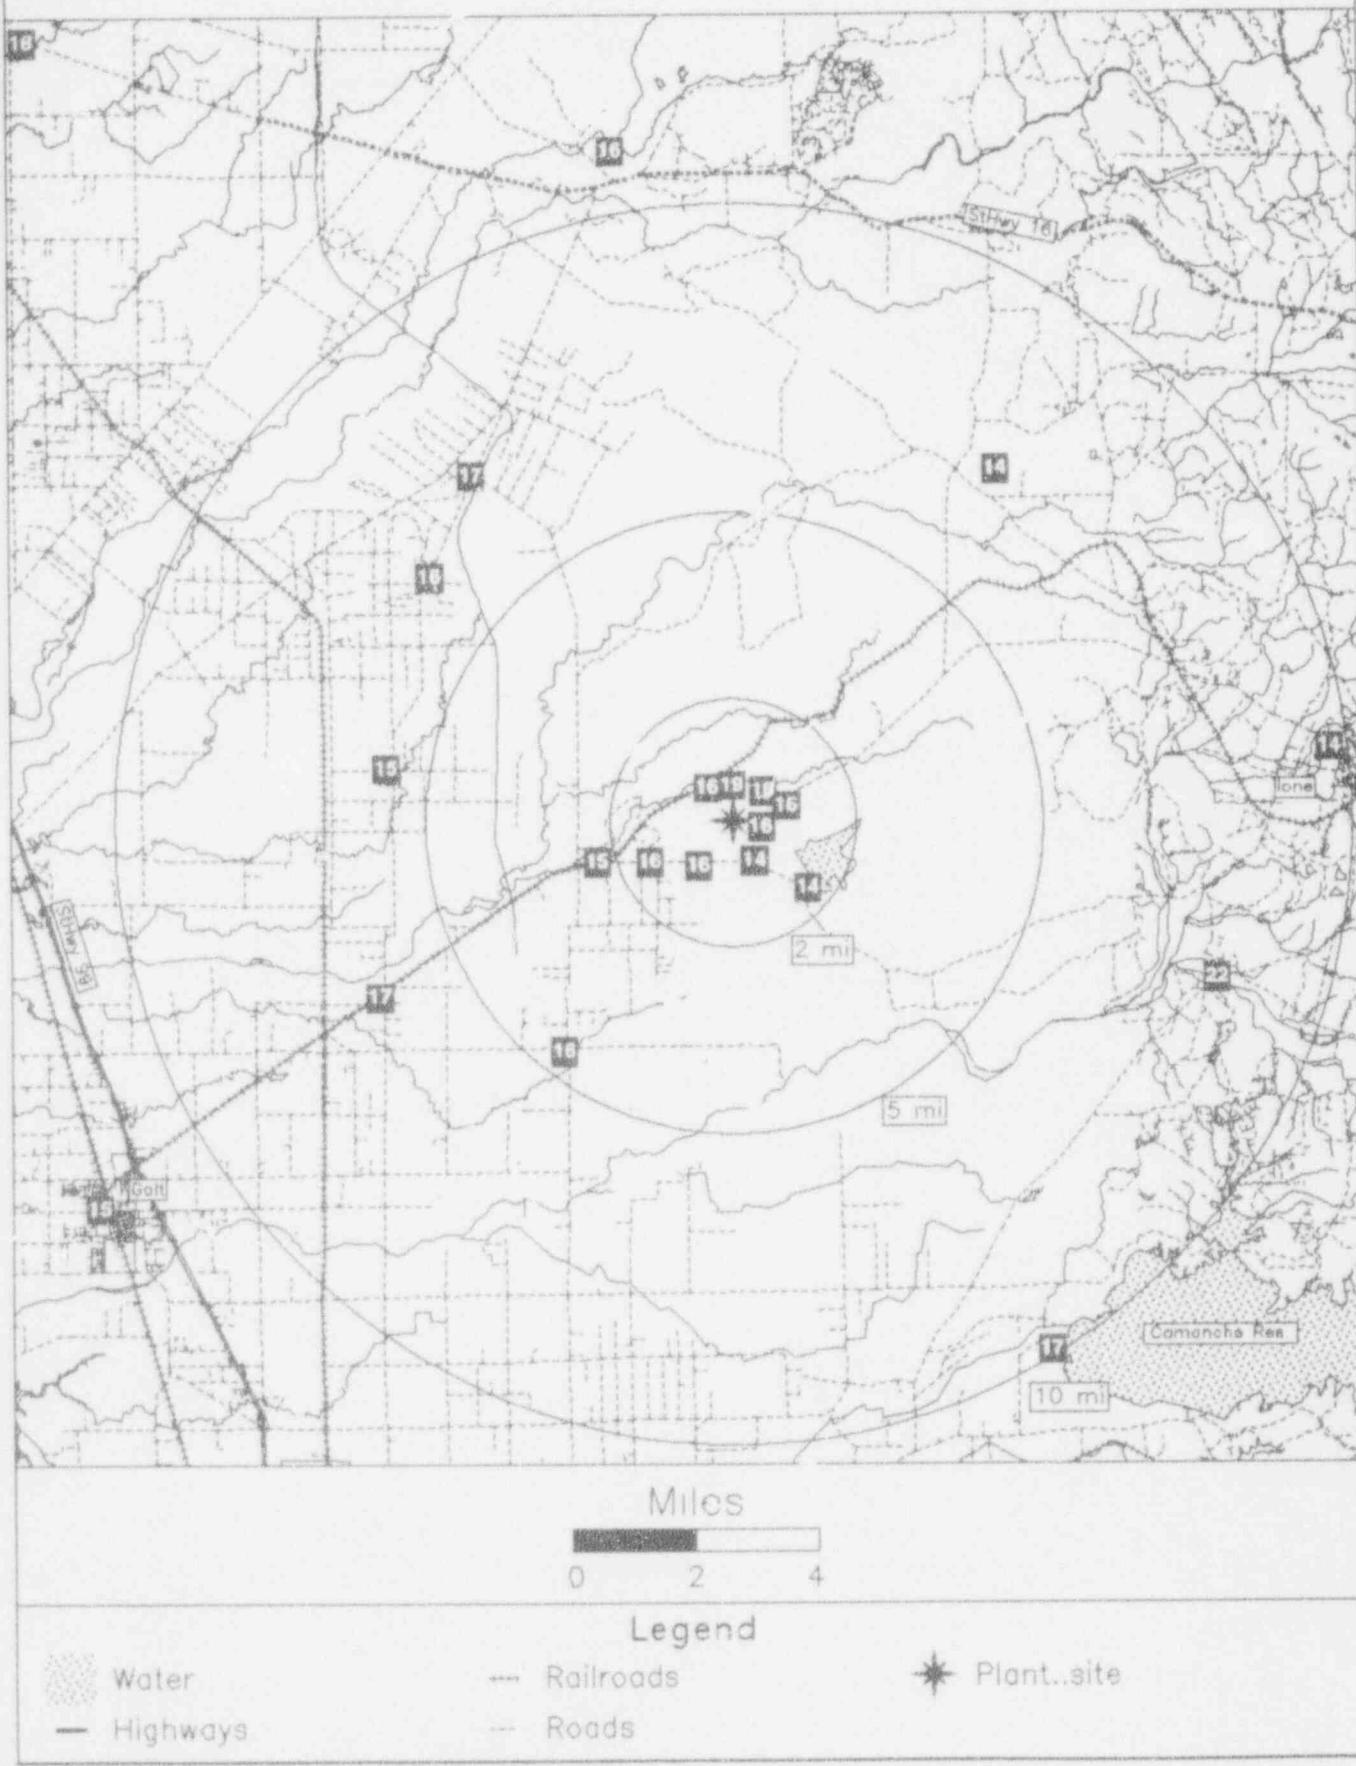

RIVER BEND

TLD Direct Radiation Environmental Monitoring
 For the period 931006-940208 126 Days
 Field Time: 91 Days

NRC Sta	Location	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	348	1.3 18.3 +- 0.5; 2.7	16.7 +- 0.6; 3.8	18.1 +- 2.2
2	42	1.1 19.6 +- 0.6; 2.9	18.0 +- 0.6; 4.0	18.3 +- 2.3
3	61	1.1 19.3 +- 0.6; 2.9	17.7 +- 0.6; 4.0	19.2 +- 2.2
4	90	0.8 19.6 +- 0.6; 2.9	18.0 +- 0.6; 4.0	18.2 +- 2.0
5	107	0.6 18.9 +- 0.6; 2.8	17.3 +- 0.6; 3.9	19.0 +- 1.8
6	136	0.8 20.2 +- 0.6; 3.0	18.6 +- 0.7; 4.0	19.3 +- 2.4
7	166	1.0 16.2 +- 0.5; 2.4	14.6 +- 0.5; 3.6	16.2 +- 1.7
8	182	0.9 17.6 +- 0.5; 2.6	16.0 +- 0.6; 3.8	17.3 +- 2.2
9	195	0.6 18.4 +- 0.6; 2.8	16.8 +- 0.6; 3.9	17.1 +- 2.1
10	225	0.7 19.3 +- 0.6; 2.9	17.7 +- 0.6; 4.0	17.7 +- 2.2
11	254	0.4 17.8 +- 0.5; 2.7	16.2 +- 0.6; 3.8	17.5 +- 2.3
12	276	0.6 20.2 +- 0.6; 3.0	18.6 +- 0.7; 4.1	18.6 +- 1.9
13	295	0.6 19.7 +- 0.6; 3.0	18.1 +- 0.6; 4.0	19.3 +- 2.0
14	320	0.9 19.8 +- 0.6; 3.0	18.2 +- 0.6; 4.0	18.2 +- 2.2
15	332	2.1 19.9 +- 0.6; 3.0	18.3 +- 0.6; 4.0	19.0 +- 2.0
16	312	2.7 19.4 +- 0.6; 2.9	17.8 +- 0.6; 4.0	18.0 +- 2.8
17	302	3.1 18.0 +- 0.5; 2.7	16.4 +- 0.6; 3.8	16.2 +- 2.2
18	278	3.8 17.1 +- 0.5; 2.6	15.5 +- 0.6; 3.7	15.4 +- 2.5
19	242	2.8 21.3 +- 0.6; 3.2	19.7 +- 0.7; 4.2	19.8 +- 2.4
20	195	5.4 19.2 +- 0.6; 2.9	17.6 +- 0.6; 3.9	18.0 +- 2.6
21	215	3.0 19.4 +- 0.6; 2.9	17.8 +- 0.6; 4.0	18.5 +- 2.3
22	233	7.1 18.1 +- 0.5; 2.7	16.5 +- 0.6; 3.8	15.3 +- 2.5
23	246	9.7 19.9 +- 0.6; 3.0	18.3 +- 0.6; 4.0	18.0 +- 2.1
24	234	7.3 18.8 +- 0.6; 2.8	17.1 +- 0.6; 3.9	18.5 +- 2.0
25	185	7.6 20.6 +- 0.6; 3.1	19.0 +- 0.7; 4.1	18.4 +- 2.5
26	322	7.7 17.7 +- 0.5; 2.7	16.1 +- 0.6; 3.8	17.5 +- 2.5
27	328	10.0 19.8 +- 0.6; 3.0	18.2 +- 0.6; 4.0	18.9 +- 2.1
28	340	7.2 18.6 +- 0.6; 2.8	17.1 +- 0.6; 3.9	18.5 +- 2.0
29	354	9.5 18.4 +- 0.6; 2.8	16.8 +- 0.6; 3.9	17.5 +- 2.2
30	360	5.1 Missing Dosimeter	No Net Data	19.0 +- 2.2
31	221	6.9 20.6 +- 0.6; 3.1	19.0 +- 0.7; 4.1	18.8 +- 1.9
32	40	4.9 18.8 +- 0.6; 2.8	17.2 +- 0.6; 3.9	18.1 +- 2.2
33	52	8.7 15.3 +- 0.5; 2.3	13.8 +- 0.5; 3.5	15.6 +- 1.8
34	65	8.4 18.9 +- 0.6; 2.8	17.3 +- 0.6; 3.9	17.3 +- 2.2
35	87	6.6 17.4 +- 0.5; 2.6	15.9 +- 0.6; 3.8	16.0 +- 2.0
36	326	5.8 18.9 +- 0.6; 2.8	17.3 +- 0.6; 3.9	18.4 +- 2.5
37	329	22.0 18.5 +- 0.6; 2.8	16.9 +- 0.6; 3.9	17.8 +- 2.0
38	111	3.8 17.5 +- 0.5; 2.6	15.9 +- 0.6; 3.8	17.1 +- 2.3
39	131	5.6 19.8 +- 0.6; 3.0	18.2 +- 0.6; 4.0	17.7 +- 2.3
40	155	6.2 18.9 +- 0.6; 2.8	17.4 +- 0.6; 3.9	18.5 +- 2.4
41	120	9.0 16.2 +- 0.5; 2.4	14.7 +- 0.5; 3.6	17.5 +- 1.7
42	121	11.0 16.0 +- 0.5; 2.4	14.5 +- 0.5; 3.6	15.6 +- 2.0
43	180	1.1 20.3 +- 0.6; 3.1	18.7 +- 0.7; 4.1	19.7 +- 2.4
44	150	28.0 16.3 +- 0.5; 2.4	14.7 +- 0.6; 3.6	15.2 +- 2.3

Transit Dose = 1.4 +- 0.3; 2.8

RIVER BEND
For the period 931006-940208

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	16.8 +- 0.0	1
11.26 - 33.75 NNE	No Data +- Nc Data	0
33.76 - 56.25 NE	16.3 +- 2.2	3
56.26 - 78.75 ENE	17.5 +- 0.3	2
78.76 - 101.25 E	16.9 +- 1.5	2
101.26 - 123.75 ESE	15.6 +- 1.3	4
123.76 - 146.25 SE	18.4 +- 0.3	2
146.26 - 168.75 SSE	16.0 +- 1.9	2
168.76 - 191.25 S	17.9 +- 1.7	3
191.26 - 213.75 SSW	17.2 +- 0.5	2
213.76 - 236.25 SW	17.7 +- 0.9	5
236.26 - 258.75 WSW	18.1 +- 1.8	3
258.76 - 281.25 W	17.1 +- 2.2	2
281.26 - 303.75 WNW	17.3 +- 1.2	2
303.76 - 326.25 NW	17.4 +- 0.9	4
326.26 - 348.75 NNW	17.4 +- 0.7	5

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	17.4 +- 1.2	15
2 - 5	17.3 +- 1.4	8
> 5	16.9 +- 1.4	19
Upwind Control	14.7 +- 0.0	1

RIVER BEND
TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	348	BEHIND TRN CNTR ON AIR SMPL FENCE
2	42	500' FROM TOM'S KITCH. ACROSS FROM OLD HWY 61
3	61	STUB POLE ON POWELL STA. RD. PAST WHITE FENCE
4	90	0.5 MI PAST TLD#3, POWELL STA. RD.
5	107	STUB POLE, R.SIDE POWELL STA. RD. PAST CHURCH
6	136	STUB POLE, 5 POLES BACK FROM RAILROAD TRACK
7	166	STUB POLE PAST RR TRACKS ON POWELL STATION RD
8	182	POWELL STA. RD. ADJACENT TO GATE 23
9	195	UTIL POLE #10177 ON L NR RIVER ACCESS RD.
10	225	LA 965, 1ST UTIL POLE N OF RIVER ACSS RD.
11	254	3RD UTILITY POLE ON R. PAST OLD RR TRACKS
12	276	UTILITY POLE BETWEEN GATES 13 & 14
13	295	CORNER OF GARDEN #1 NR MET TOWER AIR SAMPLER
14	320	UTILITY POLE NEAR DRIVEWAY OF LEET'S RES.
15	332	UTILITY POLE JCT. OF LA 965 & US 61
16	312	FRONT OF CHURCH ACROSS FROM W.FELICIANA HOSP
17	302	UTIL POLE, L SIDE OF ST.FRANCISVILLE BANK
18	278	UTILITY POLE, ST.FRANCISVILLE FERRY LANDING
19	242	UTIL POLE, 1.2 MI. FROM #21 PAST BIG CAJUN II
20	195	STUB POLE AT INT. OF LA 414 & 415
21	215	UTILITY POLE AT TRUCK ENTR. TO BIG CAJUN II
22	233	POLE, FRONT LEFT SIDE OF POINTE COURT HOUSE
23	246	UTIL POLE, LA 1/10 & 3131, FRNT OF TRACTOR CO
24	234	UTILITY POLE, LA413 & LA414 NR GROCERY
25	185	UTILITY POLE, LA415 & LA416/CAL & MARY'S R.
26	322	LA66 & SOLITUDE RD ON SOLITUDE SIGN
27	328	LA66 & LA968 (HIGHLAND RD), LEFT SIDE ON FENCE
28	340	US 61 & CEDAR LANE ON UTILITY POLE
29	354	UTILITY POLE AT INT. OF US 61 & LA 421
30	360	UTIL POLE, LA10 & BAINS RD (WF2) AT CHURCH
31	221	STUB POLE, LA965/AUDUBON LN PAST OAKLEY
32	40	STUB POLE AT INTERSECTION OF LA 965 & LA 966
33	52	UTILITY POLE IN FRONT OF JACKSON TOWN HALL
34	65	UTILITY POLE, LA 68 & DIXON CORRECT. INST.
35	87	GSU GRAVEL PWR. CTR. LEFT SIDE PAST DIXON
36	326	US61/W.FELICIANA 2(BAINS RD)@ WFHS
37	329	UTILITY POLE, END OF LA 66/ANGOLA ST. PEN.
38	111	US 61 & LA 954 NEAR CATTLE GUARD
39	131	US 61 & LA 68 BEHIND SERVICE STA
40	155	1ST UTIL POLE, PLAINS-PORT HUDSON & LA 3113
41	120	UTIL POLE, PLAINS-PORT HUD. & LA964 AT STORE
42	121	LA64 & 40TH ST., FRONT OF ZACHARY HIGH SCHOOL
43	180	POWELL STA RD ACROSS FROM FOREST PLANTATION
44	150	AMERICA & ST.CHAS.ST BEHIND GSU ON NORTH BLVD

NRC TLD DOSES FOR RIVER BEND AREA

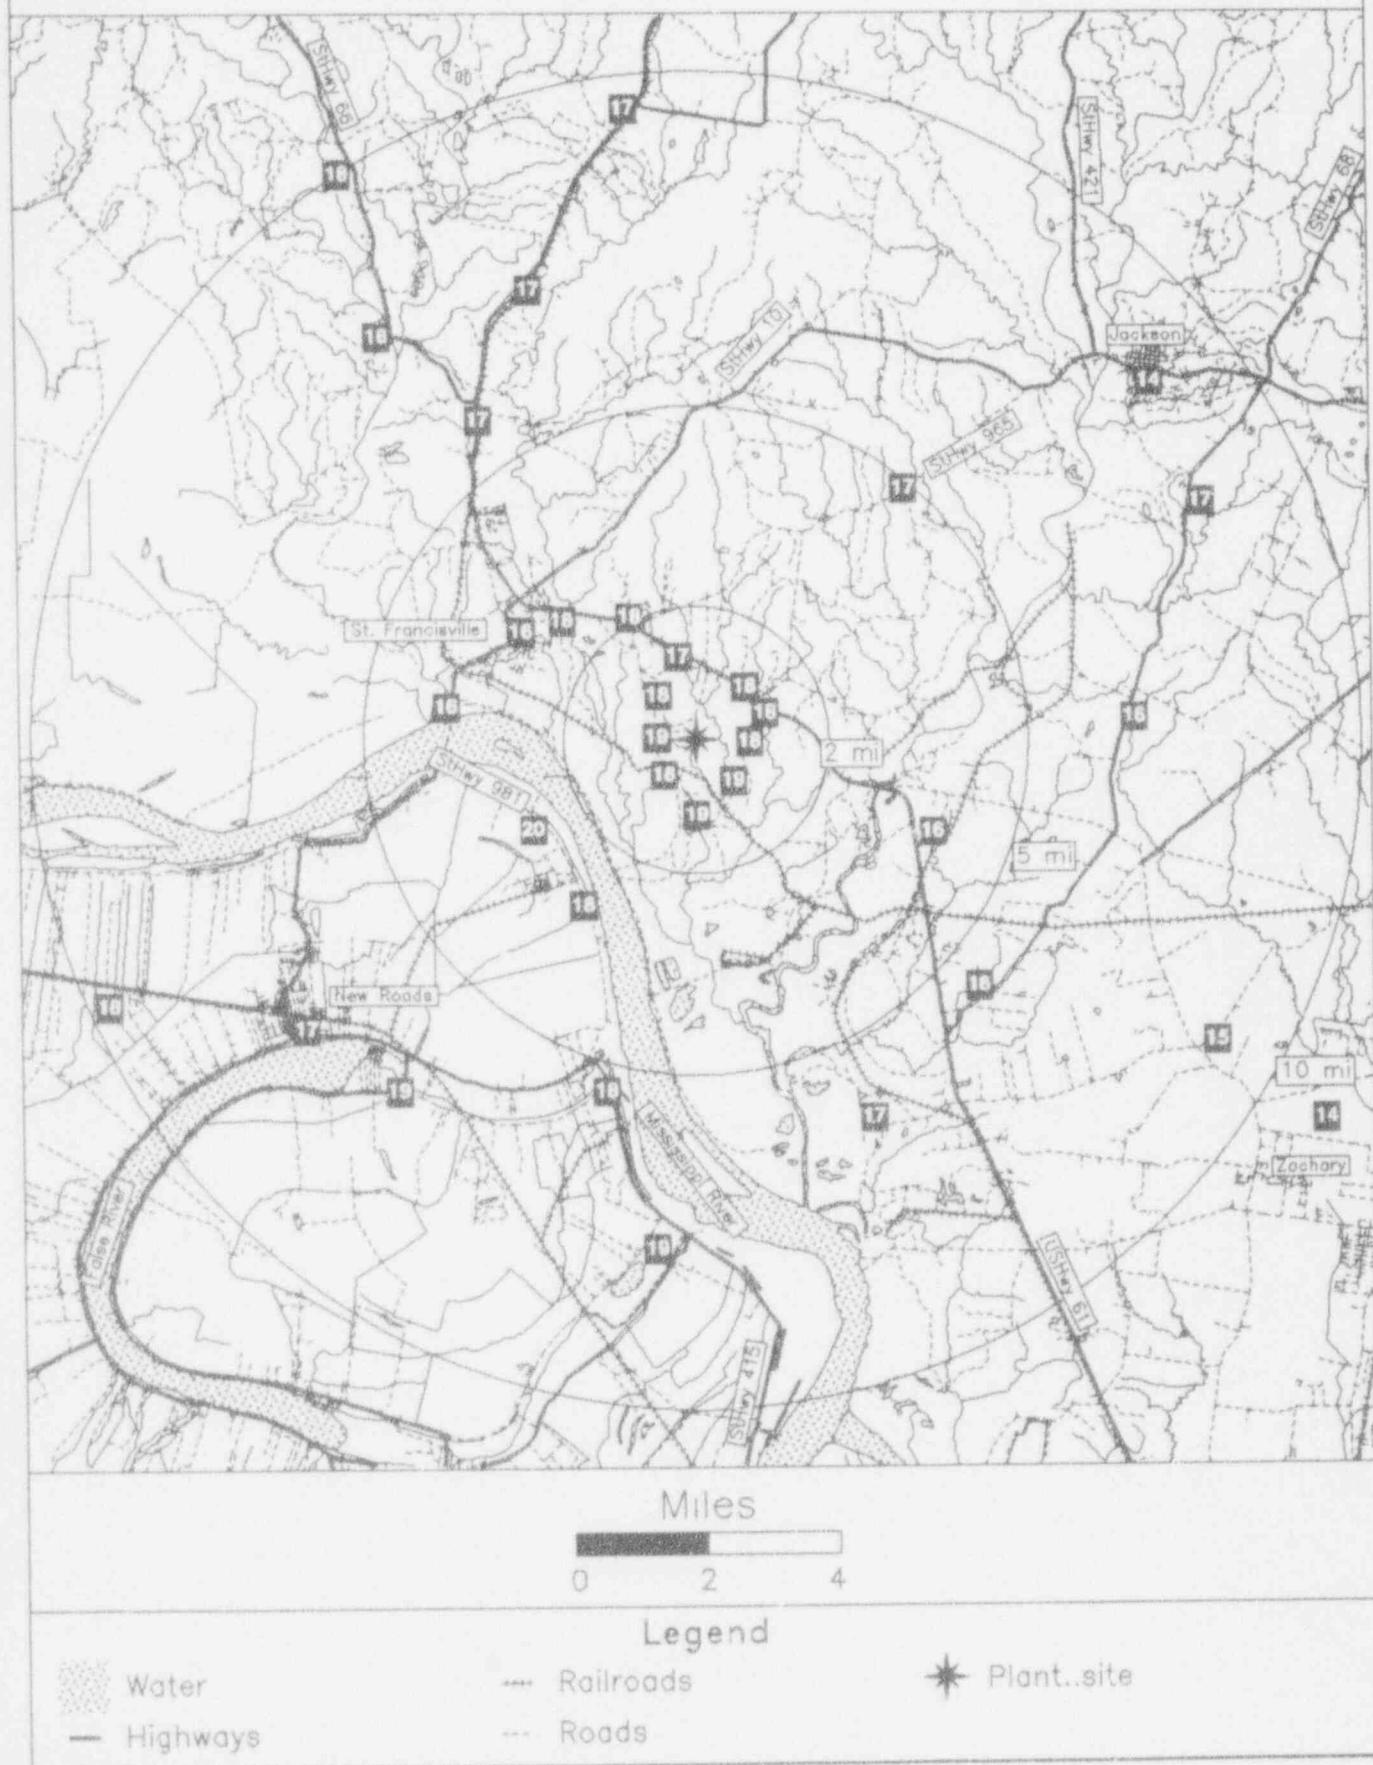

ROBINSON

TLD Direct Radiation Environmental Monitoring
 For the period 930914-940203 143 Days
 Field Time: 108 Days

NRC Sta	Location	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	191	0.2	21.1 +- 0.6; 3.2	14.0 +- 0.6; 3.9
2	151	1.9	29.5 +- 0.9; 4.4	21.1 +- 0.8; 4.7
3	134	2.0	25.2 +- 0.8; 3.8	17.5 +- 0.7; 4.3
4	119	1.9	20.6 +- 0.6; 3.1	13.7 +- 0.6; 3.9
5	89	2.1	Missing Dosimeter	No Net Data
6	65	1.0	23.8 +- 0.7; 3.6	16.3 +- 0.7; 4.2
7	46	1.8	21.4 +- 0.6; 3.2	14.2 +- 0.6; 3.9
8	27	1.9	24.1 +- 0.7; 3.6	16.5 +- 0.7; 4.2
9	22	3.5	22.4 +- 0.7; 3.4	15.1 +- 0.6; 4.0
10	0	5.0	25.1 +- 0.8; 3.8	17.3 +- 0.7; 4.3
11	51	4.8	26.6 +- 0.8; 4.0	18.6 +- 0.7; 4.4
12	67	4.1	21.7 +- 0.7; 3.3	14.5 +- 0.6; 4.0
13	87	4.5	23.8 +- 0.7; 3.6	16.3 +- 0.7; 4.2
14	109	5.0	24.5 +- 0.7; 3.7	16.9 +- 0.7; 4.2
15	118	4.8	Missing Dosimeter	No Net Data
16	138	5.3	24.6 +- 0.7; 3.7	17.0 +- 0.7; 4.2
17	115	17.1	21.8 +- 0.7; 3.3	14.6 +- 0.6; 4.0
18	199	12.6	24.6 +- 0.7; 3.7	16.9 +- 0.7; 4.2
19	208	4.8	29.6 +- 0.9; 4.4	21.1 +- 0.8; 4.7
20	225	4.0	26.4 +- 0.8; 4.0	18.4 +- 0.7; 4.4
21	178	4.6	18.4 +- 0.6; 2.8	11.8 +- 0.6; 3.7
22	167	3.7	23.4 +- 0.7; 3.5	16.0 +- 0.7; 4.1
23	181	2.3	22.3 +- 0.7; 3.3	15.1 +- 0.6; 4.0
24	194	2.0	27.1 +- 0.8; 4.1	19.0 +- 0.8; 4.5
25	228	2.1	27.0 +- 0.8; 4.0	18.9 +- 0.7; 4.4
26	245	1.5	21.4 +- 0.6; 3.2	14.3 +- 0.6; 3.9
27	273	1.8	20.8 +- 0.6; 3.1	13.7 +- 0.6; 3.9
28	287	2.0	20.0 +- 0.6; 3.0	13.1 +- 0.6; 3.8
29	311	1.6	24.2 +- 0.7; 3.6	16.6 +- 0.7; 4.2
30	334	1.9	21.7 +- 0.7; 3.3	14.6 +- 0.6; 4.0
31	351	2.1	20.6 +- 0.6; 3.1	13.6 +- 0.6; 3.9
32	333	4.0	23.9 +- 0.7; 3.6	16.4 +- 0.7; 4.2
33	318	4.7	25.8 +- 0.8; 3.9	18.0 +- 0.7; 4.3
34	310	6.9	23.2 +- 0.7; 3.5	15.8 +- 0.7; 4.1
35	295	4.0	30.3 +- 0.9; 4.5	21.7 +- 0.8; 4.8
36	269	4.8	26.9 +- 0.8; 4.0	18.8 +- 0.7; 4.4
37	252	4.6	24.7 +- 0.7; 3.7	17.0 +- 0.7; 4.2
38	274	10.7	22.8 +- 0.7; 3.4	15.4 +- 0.7; 4.1
39	286	15.3	Missing Dosimeter	No Net Data
40	289	16.5	21.1 +- 0.6; 3.2	14.0 +- 0.6; 3.9
41	291	17.5	20.6 +- 0.6; 3.1	13.6 +- 0.6; 3.9

Transit Dose = 4.3 +- 0.4; 3.5

ROBINSON
For the period 930914-940203

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	15.5 +- 2.6	2
11.26 - 33.75 NNE	15.8 +- 1.0	2
33.76 - 56.25 NE	16.4 +- 3.1	2
56.26 - 78.75 ENE	15.4 +- 1.3	2
78.76 - 101.25 E	16.3 +- 0.0	1
101.26 - 123.75 ESE	15.0 +- 1.6	3
123.76 - 146.25 SE	17.2 +- 0.3	2
146.26 - 168.75 SSE	18.5 +- 3.6	2
168.76 - 191.25 S	13.6 +- 1.7	3
191.26 - 213.75 SSW	19.0 +- 2.1	3
213.76 - 236.25 SW	18.7 +- 0.4	2
236.26 - 258.75 WSW	15.6 +- 1.9	2
258.76 - 281.25 W	16.0 +- 2.6	3
281.26 - 303.75 WNW	17.4 +- 6.1	2
303.76 - 326.25 NW	16.8 +- 1.1	3
326.26 - 348.75 NNW	15.5 +- 1.3	2

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	15.7 +- 2.4	13
2 - 5	17.0 +- 2.5	18
> 5	16.0 +- 1.0	5
Upwind Control	13.8 +- 0.3	2

ROBINSON
 TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	191	0.2
2	151	1.9
3	134	2.0
4	119	1.9
5	89	2.1
6	65	1.0
7	46	1.8
8	27	1.9
9	22	3.5
10	0	5.0
11	51	4.8
12	67	4.1
13	87	4.5
14	109	5.0
15	118	4.8
16	138	5.3
17	115	17.1
18	199	12.6
19	208	4.8
20	225	4.0
21	178	4.6
22	167	3.7
23	181	2.3
24	194	2.0
25	228	2.1
26	245	1.5
27	273	1.8
28	287	2.0
29	311	1.6
30	334	1.9
31	351	2.1
32	333	4.0
33	318	4.7
34	310	6.9
35	295	4.0
36	269	4.8
37	252	4.6
38	274	10.7
39	286	15.3
40	289	16.5
41	291	17.5
		0.1 MILES S. OF VISITORS CENTER
		HWY. 151 (1.7 MILES S. OF RT. 23)
		RT. 39 (150 YARDS S. OF RAILROAD TRACKS)
		RT. 824 (0.4 MILES N. OF RT. 39)
		RT. 824 (1.5 MILES N. OF RT. 39)
		RT. 39 (0.5 MILES N. OF RT. 23)
		RT. 39 & RT. 737
		RT. 737 (EASTERLINGS LANDING RD.)
		RT. 21 & RT. 752
		RT. 346 (0.5 MILES W. OF RT. 46)
		RT. 20 (3.1 MILES S. OF RT. 346)
		RT. 20 (0.2 MILES S. OF LOOKOUT TOWER)
		JOHNSONS FENCE & AWNING
		HWY. 15 AT ST. MARYS CHURCH/SCHOOL
		W. CAROLINA AVE. & ARMORY ST.
		MILLER RD.
		HWY. 151 (DARLINGTON)
		HWY. 15 (BISHOPVILLE)
		RT. 13 (100 YARDS N. OF RT. 14)
		RT. 85 (1.6 MILES N. OF RT. 14)
		RT. 772 (KELLYBELL CH.)
		RT. 12 AT KELLYTOWN CH.
		RT. 53 & RT. 200
		RT. 53 AT HVT LINES
		GUM SWAMP CH.
		RT. 761 (0.5 MILES N. OF RT. 23)
		RT. 761 (1.3 MILES N. OF RT. 23)
		RT. 761 & RT. 176
		HWY. 151 & RT. 176
		RT. 172 (0.6 MILES E. OF HWY. 151)
		MARGINAL RD.
		RT. 346 AT RAILROAD TRACKS
		HWY. 151 AT RT. 711
		HWY. 151 (MCBEE)
		RT. 711 (1.9 MILES S. OF HWY. 151)
		RT. 31 AT UNION CH.
		RT. 23 AT RT. 722
		HWY. 341 (BETHUNE)
		HWY. 341 (5 MILES NW OF HWY. 1)
		HWY. 341 AT RT. 42)
		HWY. 341 (1.3 MILES NW OF RT. 42)

NRC TLD DOSES FOR ROBINSON AREA

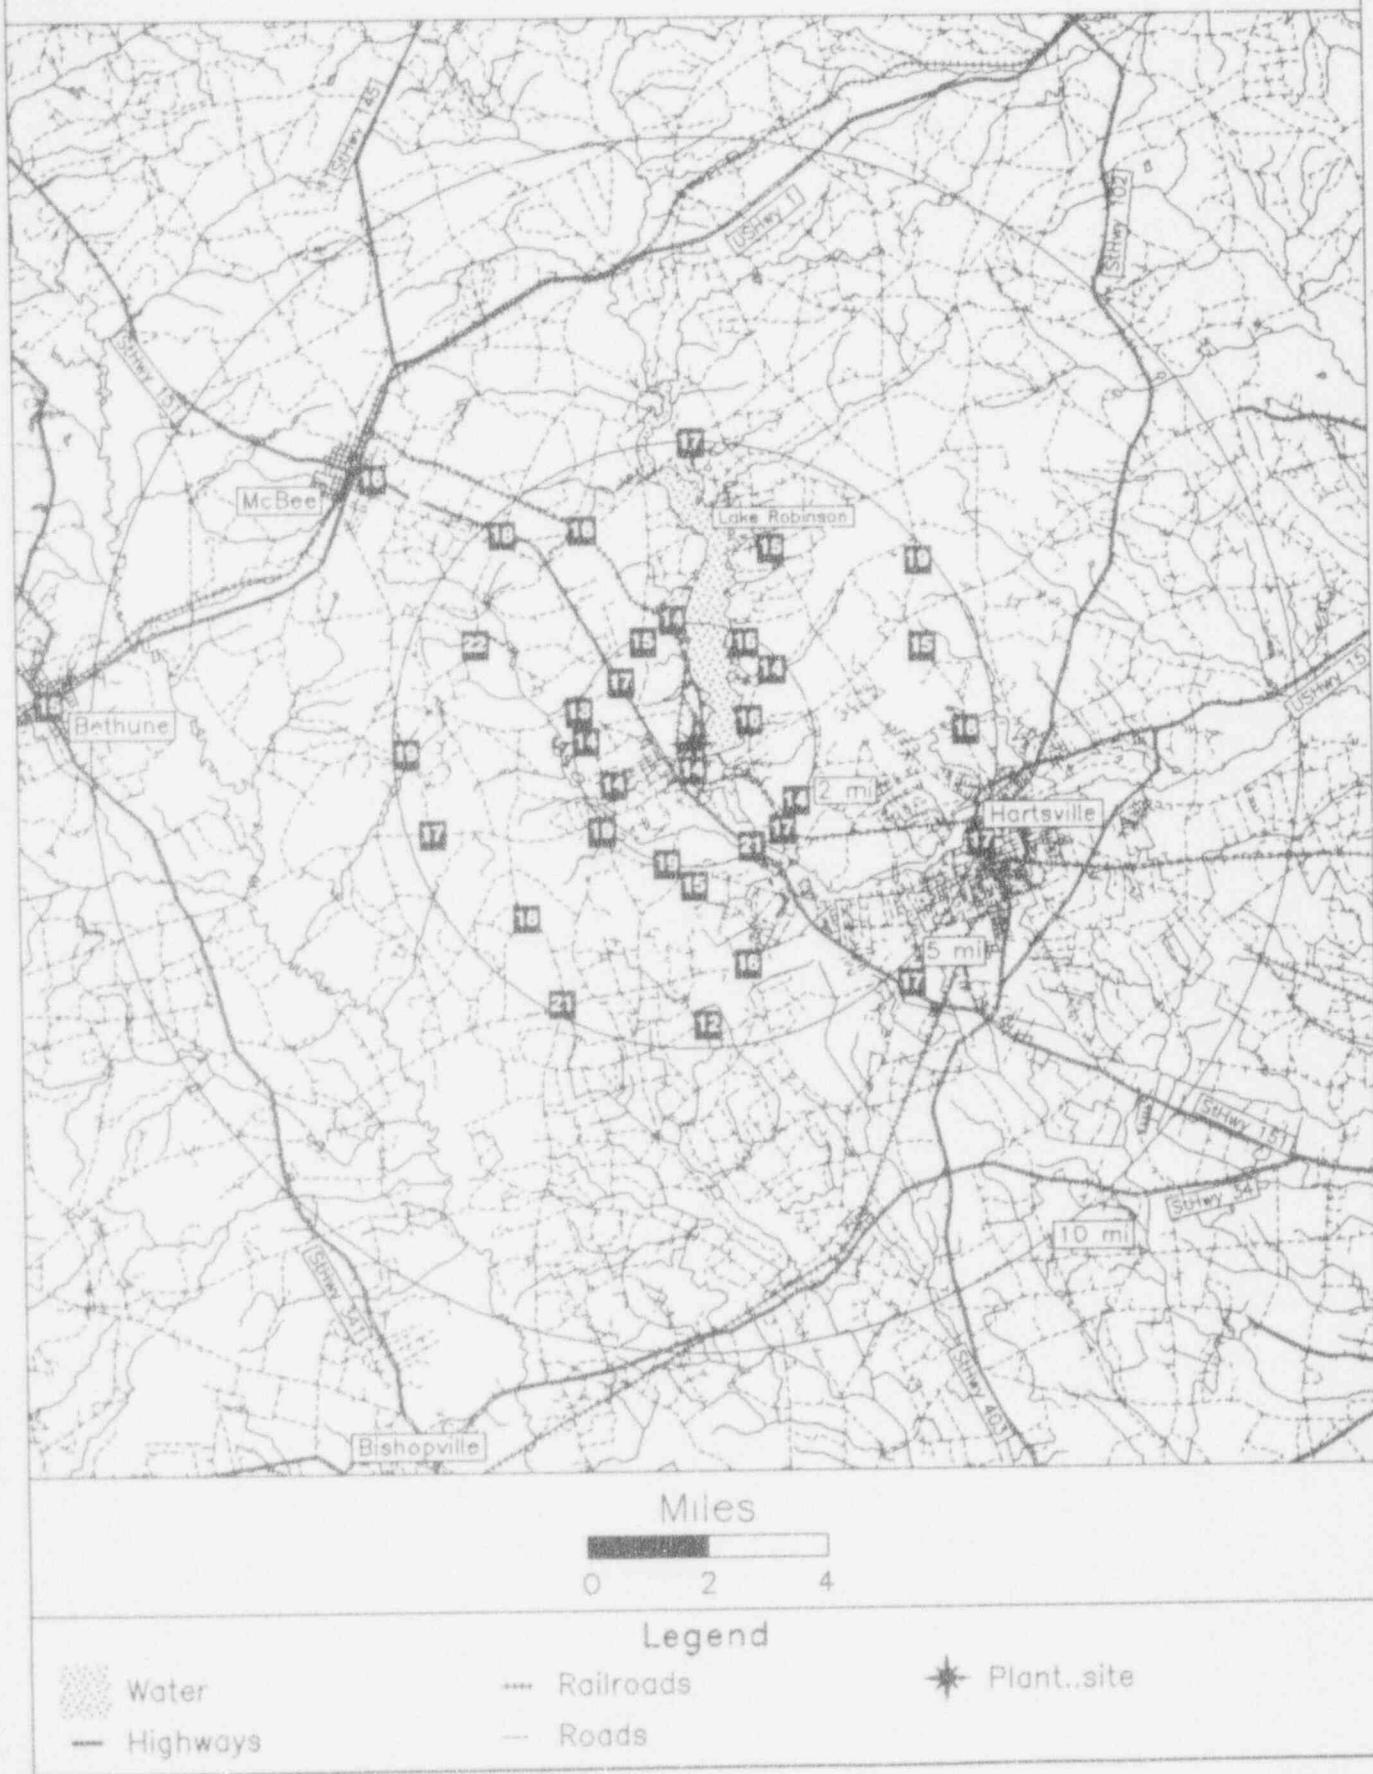

SALEM (DE)

TLD Direct Radiation Environmental Monitoring
 For the period 930916-940202 140 Days
 Field Time: 92 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
17	331	4.2	Missing Dosimeter	No Net Data
18	320	3.8	17.0 +- 0.5; 2.6	17.3 +- 0.6; 3.8
19	299	3.4	21.7 +- 0.6; 3.2	16.2 +- 1.6
20	330	9.5	24.1 +- 0.7; 3.6	19.6 +- 1.6
21	276	3.6	21.5 +- 0.6; 3.2	18.3 +- 1.6
22	266	4.7	21.8 +- 0.7; 3.3	17.9 +- 1.2
23	257	4.4	21.9 +- 0.7; 3.3	17.5 +- 1.5
24	240	4.4	Damaged Dosimeter	No Net Data
25	217	4.9	21.6 +- 0.6; 3.2	18.1 +- 1.4
26	204	3.9	21.1 +- 0.6; 3.2	18.0 +- 1.6
27	188	4.2	21.5 +- 0.6; 3.2	16.5 +- 1.4
28	319	18.1	23.7 +- 0.7; 3.6	19.4 +- 2.6
29	265	6.7	18.3 +- 0.5; 2.7	19.7 +- 2.0
30	340	12.2	18.0 +- 0.5; 2.7	15.0 +- 1.3
31	0	18.2	21.3 +- 0.6; 3.2	14.7 +- 1.8
32	338	8.1	19.7 +- 0.6; 2.9	17.3 +- 1.3
33	265	9.8	21.3 +- 0.6; 3.2	15.5 +- 1.5
34	207	11.6	20.8 +- 0.6; 3.1	17.8 +- 1.4
				17.0 +- 1.6

Transit Dose = 4.0 +- 0.3; 3.0

SALEM (DE)

For the period 930916-940202

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	No Data +- No Data	0
11.26 - 33.75 NNE	No Data +- No Data	0
33.76 - 56.25 NE	No Data +- No Data	0
56.26 - 78.75 ENE	No Data +- No Data	0
78.76 - 101.25 E	No Data +- No Data	0
101.26 - 123.75 ESE	No Data +- No Data	0
123.76 - 146.25 SE	No Data +- No Data	0
146.26 - 168.75 SSE	No Data +- No Data	0
168.76 - 191.25 S	17.2 +- 0.0	1
191.26 - 213.75 SSW	16.6 +- 0.2	2
213.76 - 236.25 SW	17.3 +- 0.0	1
236.26 - 258.75 WSW	17.6 +- 0.0	1
258.76 - 281.25 W	16.4 +- 1.6	4
281.26 - 303.75 WNW	17.3 +- 0.0	1
303.76 - 326.25 NW	12.8 +- 0.0	1
326.26 - 348.75 NNW	17.5 +- 3.0	2

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	No Data +- No Data	0
2 - 5	16.7 +- 1.6	8
> 5	16.5 +- 2.1	5
Upwind Control	16.7 +- 2.8	3

SALEM (DE)
 TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
17	331	4.2 PORT PFMN(DEL.)
18	320	3.8 AUGUSTINE BEACH(DEL.)
19	299	3.4 BAY VIEW BEACH
20	330	9.5 ROUTE #9
21	276	3.6 GETTY OIL CO.
22	266	4.7 NEAR EMERSON FARM
23	257	4.4 THOMAS LANDING
24	240	4.4 BOLTON FARM
25	217	4.9 TAYLORS BRIDGE
26	204	3.9 EAST OF TAYLORS BRIDGE
27	188	4.2 E. OF TAYLORS BRIDGE(ROADS END)
28	319	18.1 NEWARK(DEL.)
29	265	6.7 ODESSA
30	340	12.2 OMMELANDEN
31	0	18.2 WILMINGTON(DEL.)
32	338	8.1 DELAWARE CITY MARINA
33	265	9.8 NATIONAL GUARD ARMORY (MIDDLETOWN)
34	207	11.6 SMYRNA(DEL.)

NRC TLD DOSES FOR SALEM - HOPE CREEK AREA

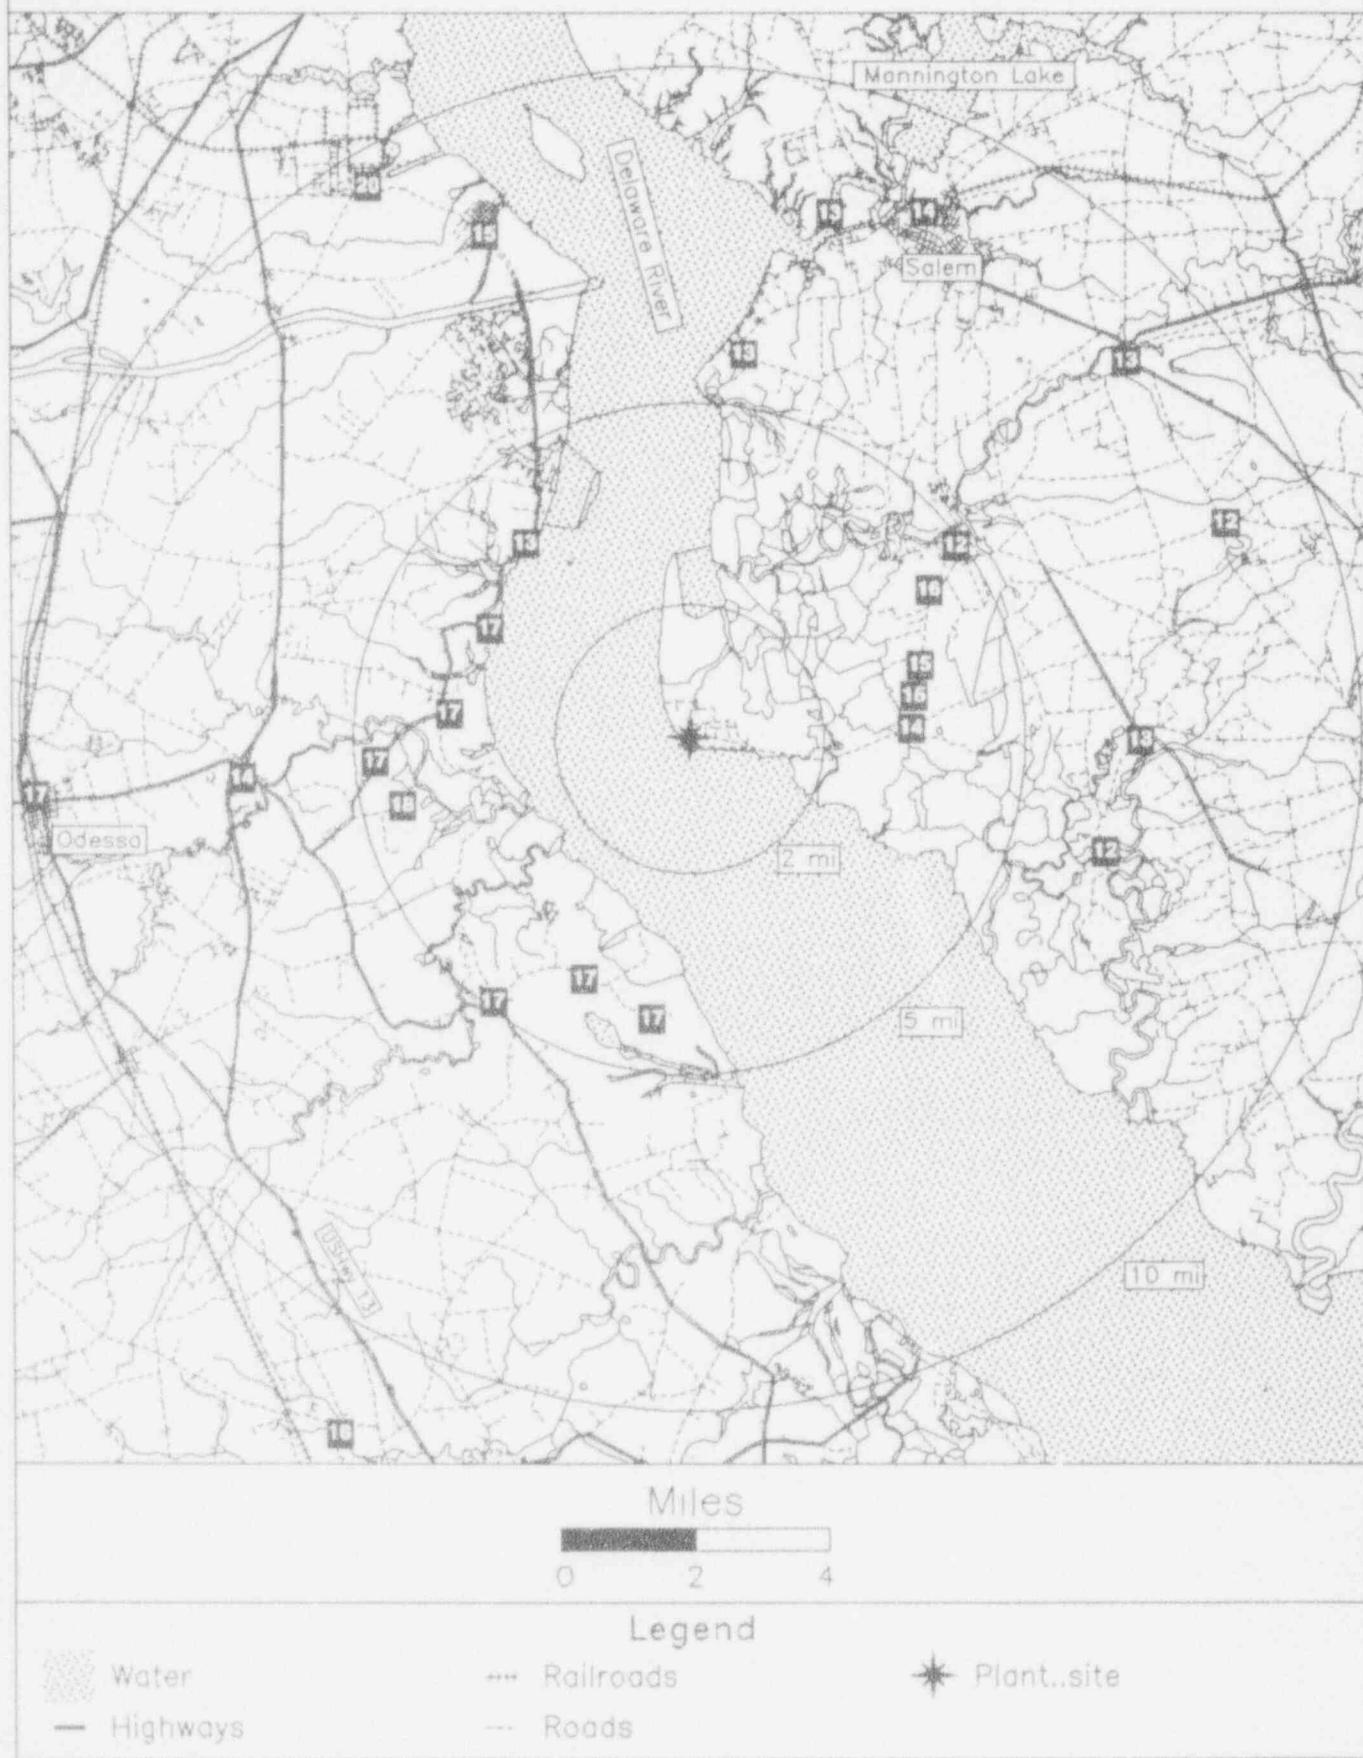

SALEM (NJ)

TLD Direct Radiation Environmental Monitoring

For the period 930916-940202 140 Days

Field Time: 92 Days

NRC Sta	Location		Gross	Net Exposure Rate	Hist. Range
	Azimuth/Dist (Deg)/(Mi)		Exposure (mR) +-Rdm; Tot.	(mR/Std. Qtr.) +-Rdm; Tot.	Net Exp Rate +-1 Std Dev
1	87	3.3	18.7 +- 0.6; 2.8	14.0 +- 0.7; 4.0	14.3 +- 1.0
2	79	3.4	19.4 +- 0.6; 2.9	14.7 +- 0.7; 4.1	14.2 +- 1.1
3	72	3.6	19.2 +- 0.6; 2.9	14.5 +- 0.7; 4.1	17.0 +- 2.4
4	58	4.2	20.3 +- 0.6; 3.0	15.6 +- 0.7; 4.2	15.5 +- 1.7
5	54	4.9	16.6 +- 0.5; 2.5	12.0 +- 0.6; 3.8	13.6 +- 1.6
6	68	8.6	16.5 +- 0.5; 2.5	11.9 +- 0.6; 3.8	12.3 +- 1.4
7	40	5.7	Missing Dosimeter	No Net Data	13.9 +- 1.2
8	116	12.0	18.3 +- 0.5; 2.7	13.6 +- 0.6; 4.0	13.9 +- 1.3
10	8	5.8	17.8 +- 0.5; 2.7	13.2 +- 0.6; 4.0	14.2 +- 1.5
11	15	8.1	18.0 +- 0.5; 2.7	13.3 +- 0.6; 4.0	13.3 +- 1.2
12	24	8.6	18.3 +- 0.5; 2.7	13.6 +- 0.6; 4.0	13.4 +- 1.2
13	49	8.6	17.4 +- 0.5; 2.6	12.8 +- 0.6; 3.9	12.9 +- 1.4
14	90	6.7	18.0 +- 0.5; 2.7	13.4 +- 0.6; 4.0	12.5 +- 1.2
15	105	6.4	17.0 +- 0.5; 2.5	12.3 +- 0.6; 3.9	12.5 +- 1.6

Transit Dose = 4.4 +- 0.4; 3.0

SALEM (NJ)
For the period 930916-940202

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	13.2 +- 0.0	1
11.26 - 33.75 NNE	13.5 +- 0.2	2
33.76 - 56.25 NE	12.4 +- 0.6	2
56.26 - 78.75 ENE	14.0 +- 1.0	3
78.76 - 101.25 E	14.0 +- 0.7	3
101.26 - 123.75 ESE	13.0 +- 0.9	2
123.76 - 146.25 SE	No Data +- No Data	0
146.26 - 168.75 SSE	No Data +- No Data	0
168.76 - 191.25 S	No Data +- No Data	0
191.26 - 213.75 SSW	No Data +- No Data	0
213.76 - 236.25 SW	No Data +- No Data	0
236.26 - 258.75 WSW	No Data +- No Data	0
258.76 - 281.25 W	No Data +- No Data	0
281.26 - 303.75 WNW	No Data +- No Data	0
303.76 - 326.25 NW	No Data +- No Data	0
326.26 - 348.75 NNW	No Data +- No Data	0

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	No Data +- No Data	0
2 - 5	14.2 +- 1.3	5
> 5	13.0 +- 0.6	8
Upwind Control	No Data +- No Data	0

SALEM (NJ)
 TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	87	ALLOWAY CREEK NECK ROAD
2	79	ALLOWAY CREEK NECK ROAD
3	72	ALLOWAY CREEK NECK ROAD
4	58	BUTTONWOOD AVE.
5	54	LOWER ALLOWAY CREEK TOWNSHIP BLDG.
6	68	TATTLETOWN JERICHO RD.
7	40	LOCUST ISLAND ROAD
8	116	GREENWICH N.J.
10	8	FT. ELFSBORG ROAD
11	15	SINNICKSON LANDING RD.
12	24	NORTH SALEM(N.J.)
13	49	QUINTON TOWNSHIP BLDG.
14	90	LOWER ALLOWAY ELEMENTARY SCHOOL
15	105	STOW NECK ROAD

NRC TLD DOSES FOR SALEM - HOPE CREEK AREA

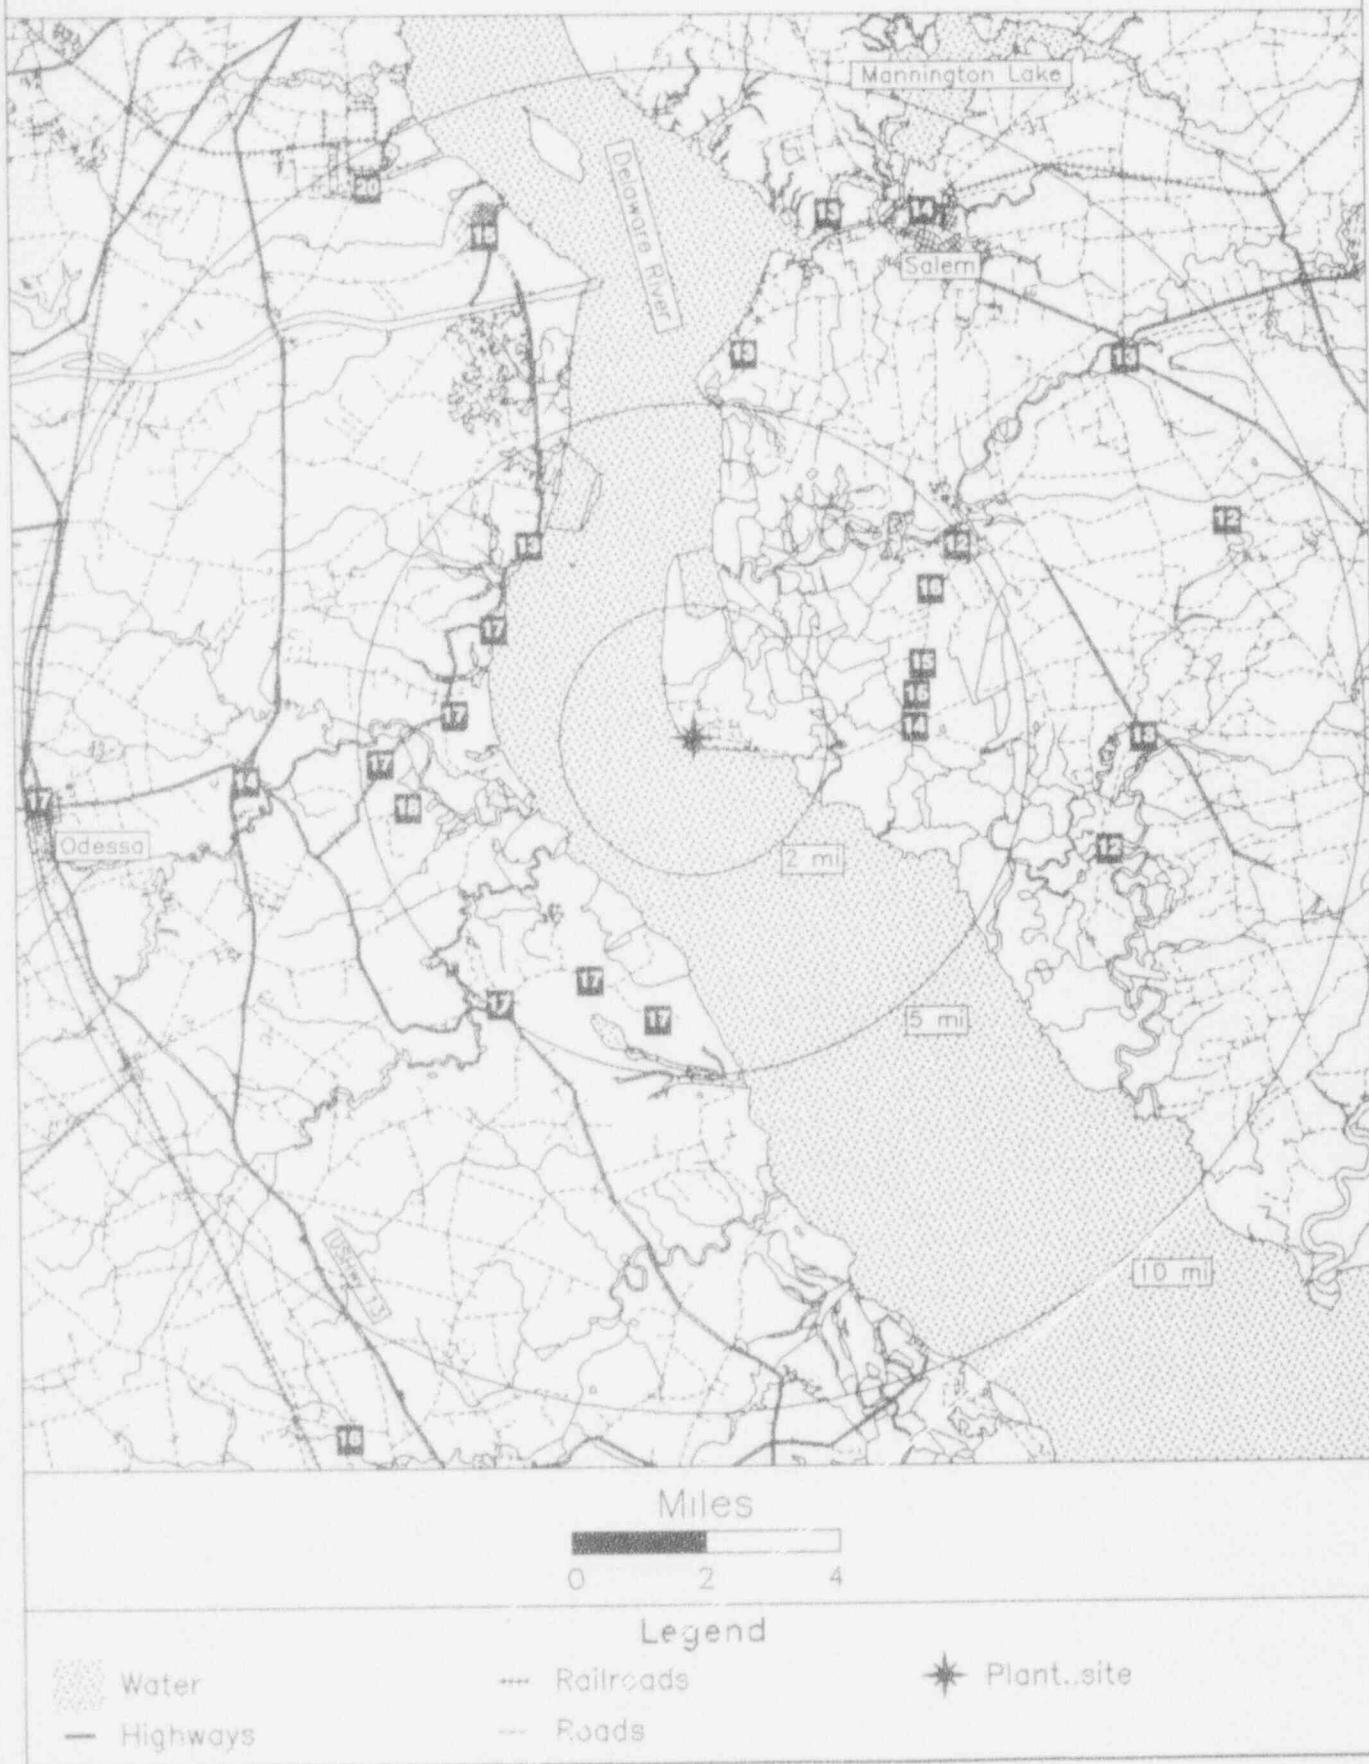

SAN ONOFRE

TLD Direct Radiation Environmental Monitoring
 For the period 930913-940201 142 Days
 Field Time: 97 Days

NRC Sta	Location		Gross			Net Exposure Rate			Hist. Range		
	Azimuth/Dist (Deg)/(Mi)		Exposure (mR) +-Rdm; Tot.			(mR/Std. Qtr.) +-Rdm; Tot.			Net Exp Rate +-1 Std Dev		
1	346	35.0	32.1	+-	1.0; 4.8	24.7	+-	1.0; 5.4	24.3	+-	3.1
2	346	35.0	31.1	+-	0.9; 4.7	23.8	+-	0.9; 5.3	23.9	+-	2.8
3	346	35.0	30.5	+-	0.9; 4.6	23.2	+-	0.9; 5.2	24.1	+-	3.0
4	327	11.0	22.8	+-	0.7; 3.4	16.1	+-	0.7; 4.4	17.6	+-	3.1
5	308	14.0	26.7	+-	0.8; 4.0	19.7	+-	0.8; 4.8	20.3	+-	2.9
6	307	10.0	24.7	+-	0.7; 3.7	17.8	+-	0.8; 4.6	17.8	+-	2.8
7	318	6.3	25.6	+-	0.8; 3.8	18.6	+-	0.8; 4.7	18.5	+-	3.1
8	322	5.1	27.0	+-	0.8; 4.1	20.0	+-	0.8; 4.8	20.2	+-	2.8
9	311	3.3	25.7	+-	0.8; 3.8	18.7	+-	0.8; 4.7	18.0	+-	2.5
10	331	3.3	27.2	+-	0.8; 4.1	20.1	+-	0.8; 4.9	20.6	+-	4.2
11	300	2.6	25.8	+-	0.8; 3.9	18.8	+-	0.8; 4.7	19.6	+-	2.4
12	285	0.5	30.4	+-	0.9; 4.6	23.1	+-	0.9; 5.2	20.8	+-	3.8
13	320	2.4	24.6	+-	0.7; 3.7	17.8	+-	0.8; 4.6	18.7	+-	3.0
14	320	1.7	24.5	+-	0.7; 3.7	17.7	+-	0.8; 4.6	18.7	+-	3.0
15	333	1.2	23.7	+-	0.7; 3.6	16.9	+-	0.8; 4.5	19.1	+-	2.5
16	30	1.9	29.1	+-	0.9; 4.4	21.9	+-	0.9; 5.1	21.4	+-	3.1
17	8	1.3	22.9	+-	0.7; 3.4	16.1	+-	0.7; 4.4	16.4	+-	2.7
18	39	2.0	30.1	+-	0.9; 4.5	22.8	+-	0.9; 5.2	22.7	+-	3.1
19	55	2.9	25.0	+-	0.7; 3.7	18.1	+-	0.8; 4.6	19.1	+-	3.0
20	77	4.1	27.6	+-	0.8; 4.1	20.5	+-	0.9; 4.9	21.1	+-	3.0
21	87	4.7	29.1	+-	0.9; 4.4	21.9	+-	0.9; 5.1	21.0	+-	2.7
22	25	3.4	30.7	+-	0.9; 4.6	23.4	+-	0.9; 5.2	22.8	+-	3.1
23	357	3.5	27.8	+-	0.8; 4.2	20.7	+-	0.9; 4.9	21.5	+-	3.6
24	25	0.4	25.0	+-	0.7; 3.7	18.1	+-	0.8; 4.6	18.9	+-	2.8
25	81	0.4	28.1	+-	0.8; 4.2	21.0	+-	0.9; 5.0	18.2	+-	3.0
26	126	2.1	21.4	+-	0.6; 3.2	14.8	+-	0.7; 4.3	16.2	+-	3.2
27	130	8.6	21.1	+-	0.6; 3.2	14.4	+-	0.7; 4.2	16.4	+-	3.2
28	99	8.9	21.5	+-	0.6; 3.2	14.8	+-	0.7; 4.3	16.8	+-	3.3
29	135	11.0	23.3	+-	0.7; 3.5	16.5	+-	0.7; 4.4	16.9	+-	3.3
30	126	2.0	18.9	+-	0.6; 2.8	12.5	+-	0.6; 4.0	13.3	+-	2.9
31	128	3.7	22.6	+-	0.7; 3.4	15.9	+-	0.7; 4.4	14.9	+-	2.2
32	140	22.0	25.2	+-	0.8; 3.8	18.3	+-	0.8; 4.6	19.4	+-	3.1
33	120	26.0	24.1	+-	0.7; 3.6	17.3	+-	0.8; 4.5	15.9	+-	2.6

Transit Dose = 5.5 +- 0.4; 3.3

SAN ONOFRE
For the period 930913-940201

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	18.4 +- 3.2	2
11.26 - 33.75 NNE	21.1 +- 2.8	3
33.76 - 56.25 NE	20.5 +- 3.4	2
56.26 - 78.75 ENE	20.5 +- 0.0	1
78.76 - 101.25 E	19.2 +- 3.8	3
101.26 - 123.75 ESE	17.3 +- 0.0	1
123.76 - 146.25 SE	15.4 +- 2.0	6
146.26 - 168.75 SSE	No Data +- No Data	0
168.76 - 191.25 S	No Data +- No Data	0
191.26 - 213.75 SSW	No Data +- No Data	0
213.76 - 236.25 SW	No Data +- No Data	0
236.26 - 258.75 WSW	No Data +- No Data	0
258.76 - 281.25 W	No Data +- No Data	0
281.26 - 303.75 WNW	20.9 +- 3.0	2
303.76 - 326.25 NW	18.6 +- 0.9	7
326.26 - 348.75 NNW	17.7 +- 2.1	3

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	18.9 +- 3.6	9
2 - 5	19.2 +- 2.5	11
> 5	17.4 +- 1.9	10
Upwind Control	23.9 +- 0.8	3

SAN ONOFRE
TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	346	35.0
2	346	35.0
3	346	35.0
4	327	11.0
5	308	14.0
6	307	10.0
7	318	6.3
8	322	5.1
9	311	3.3
10	331	3.3
11	300	2.6
12	285	0.5
13	320	2.4
14	320	1.7
15	333	1.2
16	30	1.9
17	8	1.3
18	39	2.0
19	55	2.9
20	77	4.1
21	87	4.7
22	25	3.4
23	357	3.5
24	25	0.4
25	81	0.4
26	126	2.1
27	130	8.6
28	99	8.9
29	135	11.0
30	126	2.0
31	128	3.7
32	140	22.0
33	120	26.0
		VISTA COUNTY OFFICES

NRC TLD DOSES FOR SAN ONOFRE AREA

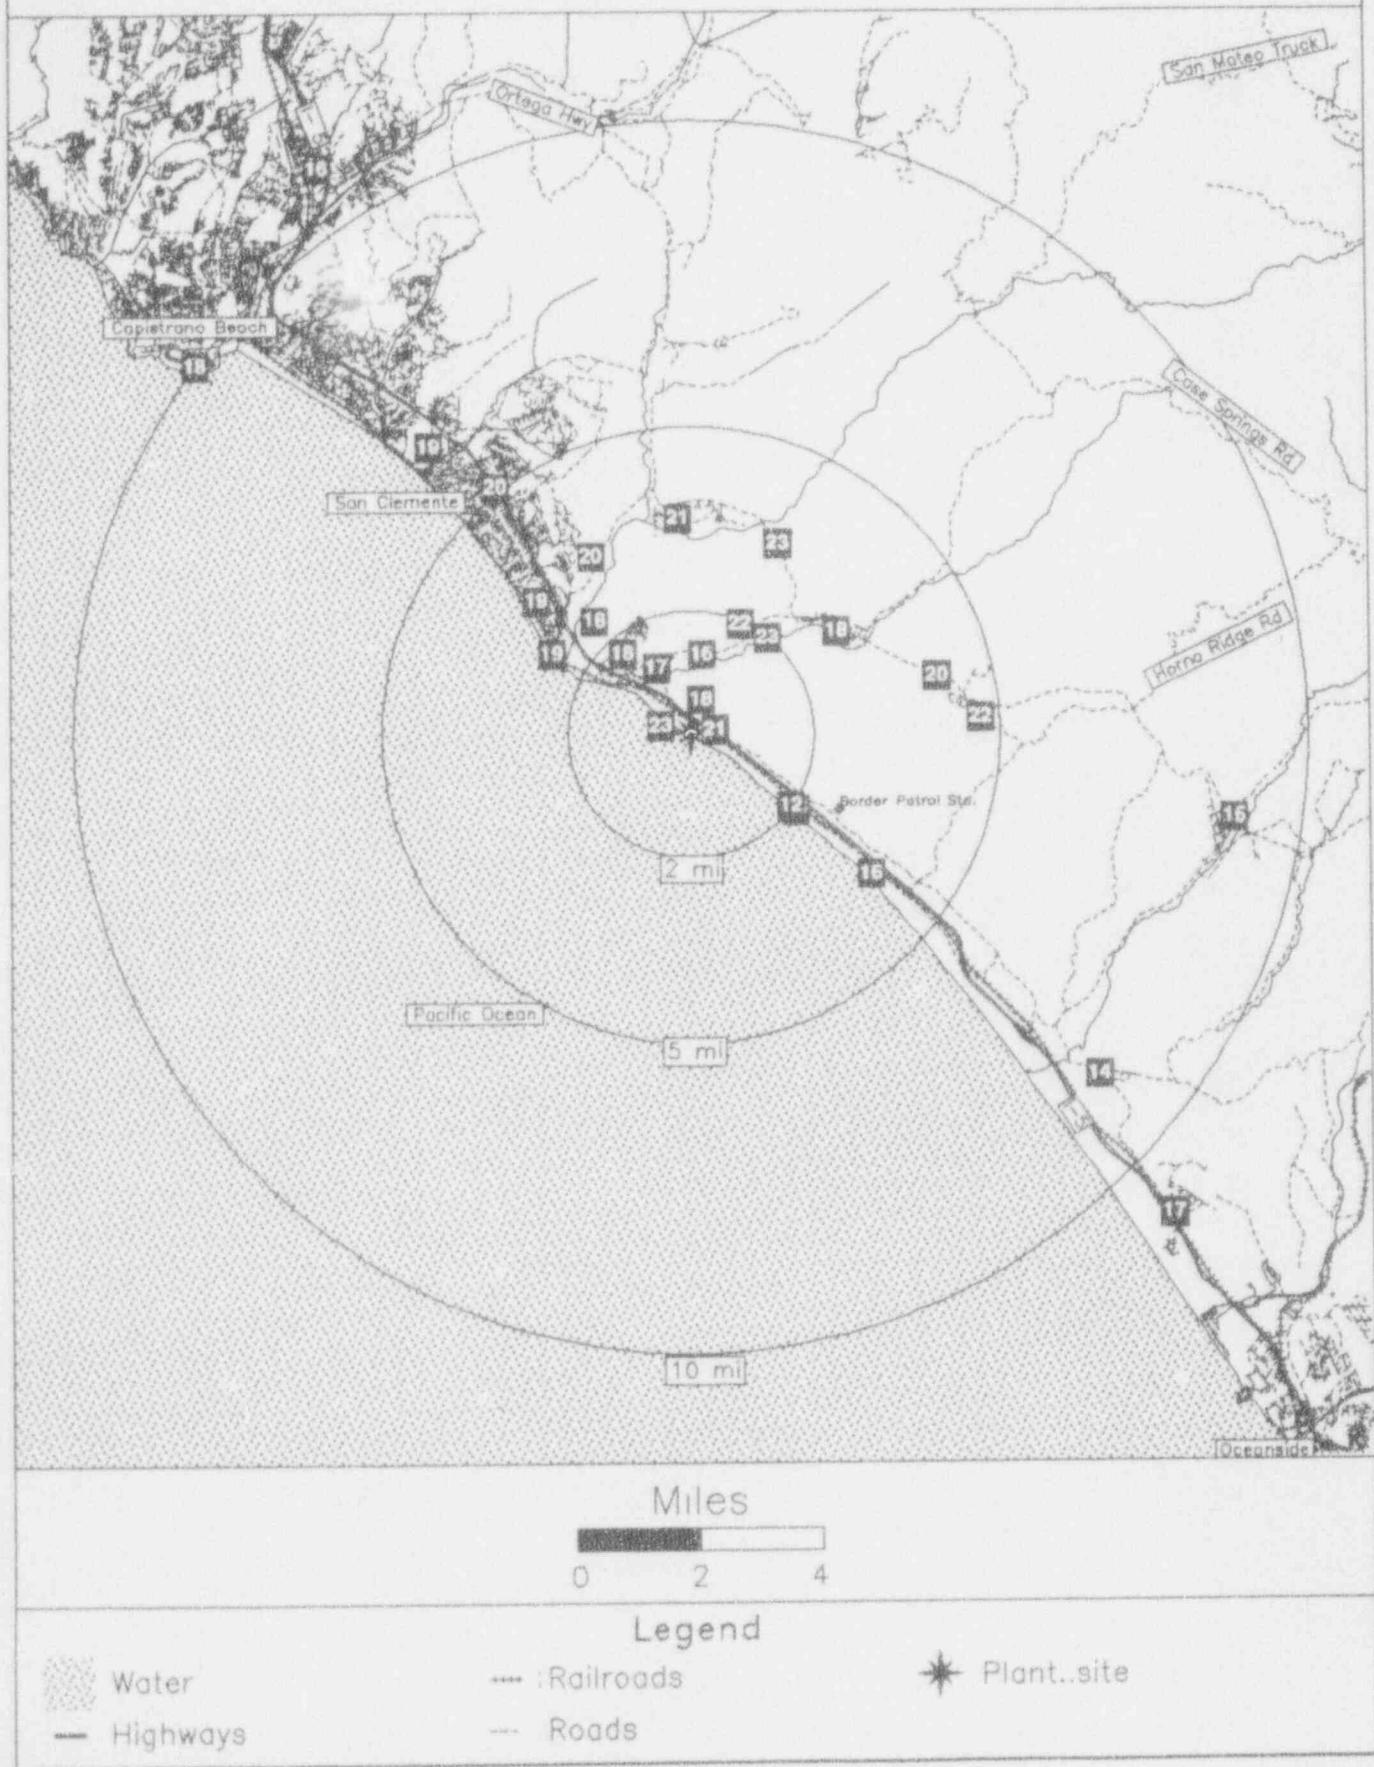

SEABROOK

TLD Direct Radiation Environmental Monitoring

For the period 930915-940209 148 Days

Field Time: 108 Days

NRC Sta	Location		Gross	Net Exposure Rate	Hist. Range
	Azimuth/Dist (Deg)/(Mi)		Exposure (mR) +-Rdm; Tot.	(mR/Std. Qtr.) +-Rdm; Tot.	Net Exp Rate +-1 Std Dev
1	154	0.6	24.0 +- 0.7; 3.6	19.6 +- 0.6; 4.0	17.5 +- 2.6
2	178	0.7	22.9 +- 0.7; 3.4	18.6 +- 0.6; 3.9	16.9 +- 2.4
3	207	0.7	24.0 +- 0.7; 3.6	19.6 +- 0.6; 4.0	16.2 +- 2.6
4	224	0.9	24.8 +- 0.7; 3.7	20.3 +- 0.7; 4.1	17.8 +- 2.8
5	243	1.2	23.6 +- 0.7; 3.5	19.2 +- 0.6; 4.0	16.2 +- 2.8
6	294	1.0	23.6 +- 0.7; 3.5	19.2 +- 0.6; 4.0	17.1 +- 2.5
7	267	0.7	23.8 +- 0.7; 3.6	19.4 +- 0.6; 4.0	16.6 +- 2.5
8	320	1.1	25.7 +- 0.8; 3.9	21.0 +- 0.7; 4.2	17.6 +- 2.8
9	329	1.6	27.5 +- 0.8; 4.1	22.5 +- 0.7; 4.3	19.1 +- 3.0
10	357	1.9	23.5 +- 0.7; 3.5	19.2 +- 0.6; 4.0	16.6 +- 2.6
11	18	2.5	23.4 +- 0.7; 3.5	19.1 +- 0.6; 4.0	17.3 +- 2.7
12	46	1.9	22.8 +- 0.7; 3.4	18.5 +- 0.6; 3.9	16.3 +- 3.6
13	83	1.7	24.8 +- 0.7; 3.7	20.2 +- 0.7; 4.1	17.0 +- 2.6
14	43	4.1	24.9 +- 0.7; 3.7	20.4 +- 0.7; 4.1	17.6 +- 2.5
15	358	4.2	24.9 +- 0.7; 3.7	20.3 +- 0.7; 4.1	17.7 +- 2.6
16	18	11.8	25.4 +- 0.8; 3.8	20.7 +- 0.7; 4.1	17.9 +- 2.6
17	321	7.4	26.5 +- 0.8; 4.0	21.7 +- 0.7; 4.2	18.8 +- 3.0
18	291	3.9	23.9 +- 0.7; 3.6	19.5 +- 0.6; 4.0	17.6 +- 2.4
19	267	3.7	23.7 +- 0.7; 3.6	19.3 +- 0.6; 4.0	17.4 +- 3.6
20	251	4.2	27.3 +- 0.8; 4.1	22.4 +- 0.7; 4.3	18.9 +- 2.9
21	228	4.7	22.2 +- 0.7; 3.3	18.1 +- 0.6; 3.8	16.9 +- 2.9
22	209	6.2	25.8 +- 0.8; 3.3	21.1 +- 0.7; 4.2	19.3 +- 2.7
23	187	6.5	26.6 +- 0.8; 4.0	21.8 +- 0.7; 4.3	19.1 +- 2.8
24	163	7.1	22.4 +- 0.7; 3.4	18.2 +- 0.6; 3.9	15.6 +- 2.5
25	174	4.0	23.1 +- 0.7; 3.5	18.9 +- 0.6; 3.9	16.2 +- 2.9
26	157	4.0	23.3 +- 0.7; 3.5	19.0 +- 0.6; 3.9	16.4 +- 2.5
27	136	2.4	24.0 +- 0.7; 3.6	19.6 +- 0.6; 4.0	17.1 +- 2.8
28	118	1.6	22.5 +- 0.7; 3.4	18.3 +- 0.6; 3.9	16.1 +- 2.4
30	67	2.1	26.0 +- 0.8; 3.9	21.3 +- 0.7; 4.2	18.1 +- 2.6
31	335	5.5	25.8 +- 0.8; 3.9	21.1 +- 0.7; 4.2	17.8 +- 2.5
32	318	3.2	26.7 +- 0.8; 4.0	21.8 +- 0.7; 4.3	18.6 +- 2.9
33	230	19.3	23.3 +- 0.7; 3.5	19.0 +- 0.6; 3.9	17.4 +- 3.4
34	230	19.3	25.8 +- 0.8; 3.9	21.1 +- 0.7; 4.2	17.8 +- 3.0
35	230	19.3	24.7 +- 0.7; 3.7	20.2 +- 0.7; 4.1	19.2 +- 3.7

Transit Dose = 0.5 +- 0.3; 3.2

SEABROOK

For the period 930915-940209

TLD Direct Radiation Environmental Monitoring

Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	19.8 +- 0.8	2
11.26 - 33.75 NNE	19.9 +- 1.2	2
33.76 - 56.25 NE	19.5 +- 1.3	2
56.26 - 78.75 ENE	21.3 +- 0.0	1
78.76 - 101.25 E	20.2 +- 0.0	1
101.26 - 123.75 ESE	18.3 +- 0.0	1
123.76 - 146.25 SE	19.6 +- 0.0	1
146.26 - 168.75 SSE	18.9 +- 0.7	3
168.76 - 191.25 S	19.8 +- 1.7	3
191.26 - 213.75 SSW	20.4 +- 1.1	2
213.76 - 236.25 SW	19.5 +- 1.2	3
236.26 - 258.75 WSW	20.8 +- 2.2	2
258.76 - 281.25 W	19.4 +- 0.0	2
281.26 - 303.75 WNW	19.4 +- 0.2	2
303.76 - 326.25 NW	21.3 +- 0.5	2
326.26 - 348.75 NNW	21.8 +- 1.0	2


Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	19.7 +- 1.1	13
2 - 5	19.8 +- 1.2	11
> 5	20.7 +- 1.2	7
Upwind Control	20.6 +- 1.4	3

SEABROOK

TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	154	END OF RAILROAD AVE.
2	178	CAUSEWAY ST.
3	207	DIRT ROAD OFF DEPOT RD.
4	224	RR OVERPASS ON DEPOT RD.
5	243	PINE ST. & RT. 1A
6	294	PAGES LANE
7	267	ROCKS RD.
8	320	BRIMERS LANE
9	329	LINCOLN AKERMAN SCH.
10	357	MARSHVIEW RESTAURANT
11	18	WINNACUNNET HIGH SCHOOL
12	46	GLADE PATH RD.
13	83	N.H. LOBSTER CO.
14	43	SCRUB-A-DUB LAUNDRY
15	358	RT. 101C & RT. 51
16	18	N. CONGREGATIONAL PARISH
17	321	EXETER
18	291	DOW LANE
19	267	LOCUST ST.
20	251	RT. 150 AND STREAM
21	228	MT. PROSPECT CEMETERY
22	209	ST. MARYS CEMETERY
23	18"	COFFIN COURT
24	163	PLUM ISLAND
25	174	LONG HILL CEMETERY
26	157	E TO Z PARKING
27	136	SEABROOK BEACH
28	118	RIVER ST.
30	67	ASHWORTH AVE.
31	335	PHINNEY LANE
32	318	WESTVIEW CEMETERY
33	230	LAWRENCE (MASS.)
34	230	LAWRENCE (MASS.)
35	230	LAWRENCE (MASS.)

NRC TLD DOSES FOR SEABROOK AREA

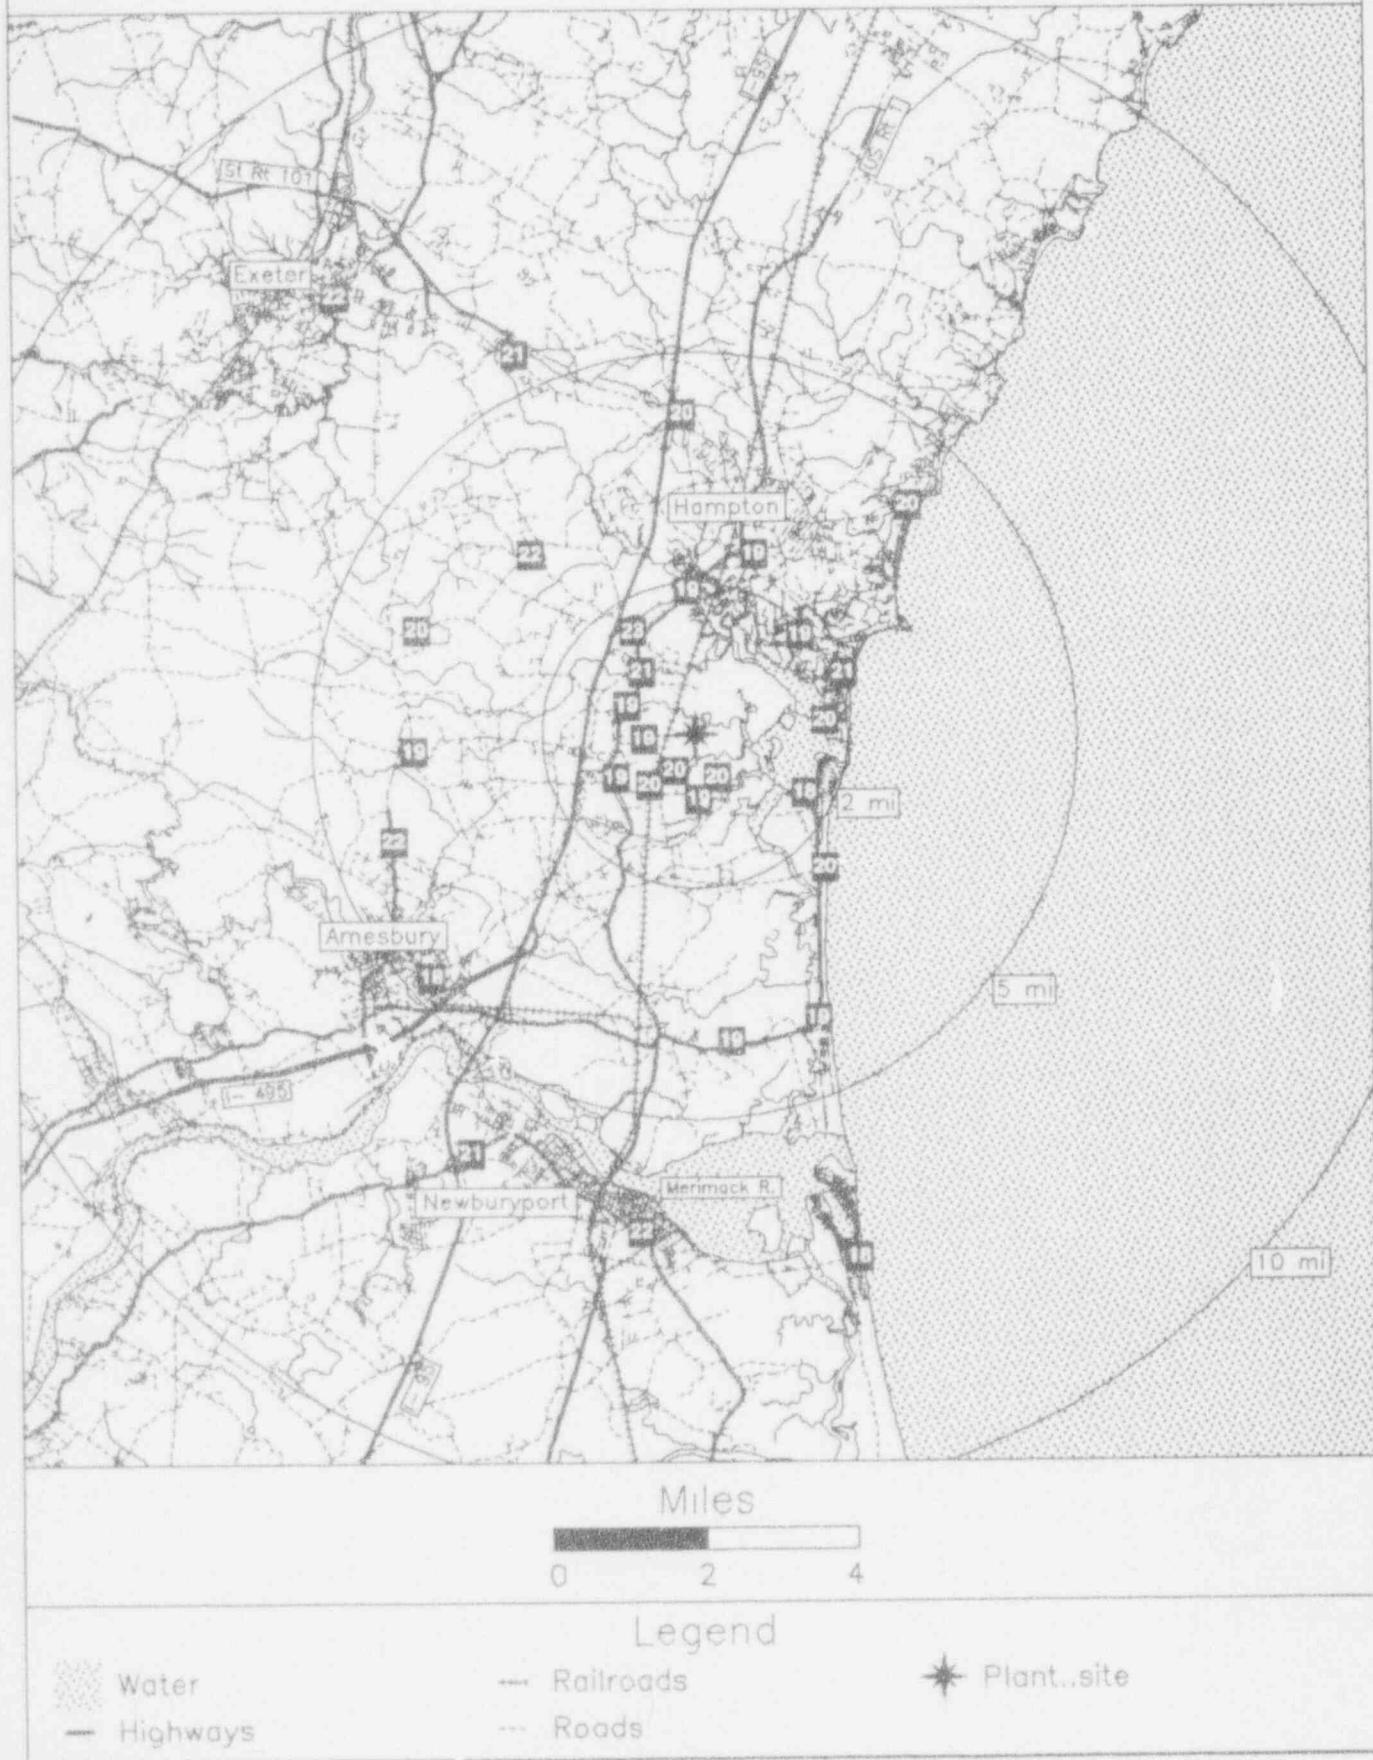

SEQUOYAH

TLD Direct Radiation Environmental Monitoring
 For the period 930914-940203 143 Days
 Field Time: 104 Days

NRC Sta	Location		Gross	Net Exposure Rate	Hist. Range
	Azimuth/Dist (Deg)/(Mi)		Exposure (mR) +-Rdm; Tot.	(mR/Std. Qtr.) +-Rdm; Tot.	Net Exp Rate +-1 Std Dev
1	218	12.0	21.7 +- 0.6; 3.2	16.2 +- 0.6; 4.0	16.9 +- 1.3
2	206	13.0	19.4 +- 0.6; 2.9	14.3 +- 0.6; 3.8	14.3 +- 1.2
3	203	3.9	26.4 +- 0.8; 4.0	20.3 +- 0.7; 4.4	20.0 +- 1.4
4	199	2.0	24.6 +- 0.7; 3.7	18.7 +- 0.7; 4.3	16.5 +- 1.3
5	181	1.4	27.2 +- 0.8; 4.1	21.0 +- 0.8; 4.5	21.0 +- 1.4
6	153	1.5	20.9 +- 0.6; 3.1	15.6 +- 0.6; 3.9	15.5 +- 1.1
7	139	1.9	20.2 +- 0.6; 3.0	14.9 +- 0.6; 3.8	14.6 +- 1.0
8	115	1.8	20.3 +- 0.6; 3.0	15.0 +- 0.6; 3.9	16.0 +- 1.9
9	84	1.6	18.0 +- 0.5; 2.7	13.0 +- 0.6; 3.7	13.7 +- 1.4
10	66	1.3	20.9 +- 0.6; 3.1	15.5 +- 0.6; 3.9	15.6 +- 1.2
11	45	1.5	22.9 +- 0.7; 3.4	17.3 +- 0.7; 4.1	16.6 +- 1.3
12	14	2.0	24.2 +- 0.7; 3.6	18.4 +- 0.7; 4.2	18.6 +- 1.1
13	2	2.1	23.9 +- 0.7; 3.6	18.2 +- 0.7; 4.2	18.8 +- 1.4
14	19	3.9	20.9 +- 0.6; 3.1	15.5 +- 0.6; 3.9	15.9 +- 1.1
15	48	4.0	17.5 +- 0.5; 2.6	12.7 +- 0.5; 3.6	13.7 +- 1.1
16	65	4.9	20.9 +- 0.6; 3.1	15.5 +- 0.6; 3.9	15.7 +- 1.1
17	90	3.9	20.6 +- 0.6; 3.1	15.3 +- 0.6; 3.9	17.5 +- 1.5
18	111	3.4	21.0 +- 0.6; 3.2	15.7 +- 0.6; 3.9	16.2 +- 1.5
19	135	3.4	21.4 +- 0.6; 3.2	16.0 +- 0.6; 4.0	15.9 +- 1.1
20	158	3.4	21.1 +- 0.6; 3.2	15.8 +- 0.6; 3.9	14.2 +- 2.0
21	184	4.6	26.3 +- 0.8; 3.9	20.2 +- 0.7; 4.4	18.5 +- 2.3
22	233	11.0	19.6 +- 0.6; 2.9	14.4 +- 0.6; 3.8	14.3 +- 1.5
23	219	4.9	22.9 +- 0.7; 3.4	17.3 +- 0.7; 4.1	17.7 +- 1.5
24	241	4.3	19.8 +- 0.6; 3.0	14.6 +- 0.6; 3.8	15.6 +- 1.2
25	235	2.0	17.1 +- 0.5; 2.6	12.3 +- 0.5; 3.6	13.2 +- 1.1
26	248	1.5	Missing Dosimeter	No Net Data	15.5 +- 2.0
27	266	1.2	19.6 +- 0.6; 2.9	14.4 +- 0.6; 3.8	14.6 +- 1.0
28	291	1.2	19.5 +- 0.6; 2.9	14.3 +- 0.6; 3.8	15.7 +- 1.4
29	309	1.2	21.7 +- 0.7; 3.3	16.3 +- 0.6; 4.0	15.9 +- 1.4
30	330	0.5	22.1 +- 0.7; 3.3	16.6 +- 0.6; 4.0	16.7 +- 1.3
31	339	1.8	21.9 +- 0.7; 3.3	16.4 +- 0.6; 4.0	16.9 +- 1.2
32	355	4.9	19.2 +- 0.6; 2.9	14.1 +- 0.6; 3.8	14.7 +- 1.2
33	334	3.6	19.4 +- 0.6; 2.9	14.3 +- 0.6; 3.8	14.6 +- 1.4
34	317	4.4	21.1 +- 0.6; 3.2	15.7 +- 0.6; 3.9	15.2 +- 1.7
35	277	5.6	21.6 +- 0.6; 3.2	16.1 +- 0.6; 4.0	16.3 +- 1.2
36	283	3.6	18.0 +- 0.5; 2.7	13.1 +- 0.6; 3.7	14.3 +- 1.1
37	273	4.4	21.2 +- 0.6; 3.2	15.8 +- 0.6; 3.9	15.1 +- 1.3
38	302	19.0	19.6 +- 0.6; 2.9	14.5 +- 0.6; 3.8	15.2 +- 1.2
39	290	18.0	21.6 +- 0.6; 3.2	16.2 +- 0.6; 4.0	16.3 +- 1.1
40	289	18.0	20.1 +- 0.6; 3.0	14.9 +- 0.6; 3.8	14.9 +- 1.1
41	318	6.1	20.7 +- 0.6; 3.1	15.3 +- 0.6; 3.9	15.8 +- 1.1

Transit Dose = 2.9 +- 0.3; 3.3

SEQUOYAH
For the period 930914-940203

TLD Direct Radiation Environmental Monitoring

Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	16.1 +- 2.9	2
11.26 - 33.75 NNE	17.0 +- 2.0	2
33.76 - 56.25 NE	15.0 +- 3.3	2
56.26 - 78.75 ENE	15.5 +- 0.0	2
78.76 - 101.25 E	14.1 +- 1.6	2
101.26 - 123.75 ESE	15.4 +- 0.5	2
123.76 - 146.25 SE	15.4 +- 0.7	2
146.26 - 168.75 SSE	15.7 +- 0.1	2
168.76 - 191.25 S	20.6 +- 0.6	2
191.26 - 213.75 SSW	17.8 +- 3.1	3
213.76 - 236.25 SW	15.0 +- 2.2	4
236.26 - 258.75 WSW	14.6 +- 0.0	1
258.76 - 281.25 W	15.4 +- 0.9	3
281.26 - 303.75 WNW	13.7 +- 0.9	2
303.76 - 326.25 NW	15.8 +- 0.5	3
326.26 - 348.75 NNW	15.7 +- 1.3	3

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	16.0 +- 2.3	15
2 - 5	15.9 +- 2.1	17
> 5	15.3 +- 0.9	5
Upwind Control	15.2 +- 0.9	3

SEQUOYAH

TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	218	KINGS PT. RD. & HWY. 58
2	206	SHALLOWFORD RD. & HWY. 153
3	203	HARRISON BAY STATE PARK
4	199	MCRNING GLORY FARMS
5	181	ORR SLOUGH
6	153	9420 HARRISON BAY RD.
7	139	HARRISON BAY RD. AT BIRCHWOOD PK
8	115	BIRCHWOOD PK NEAR IGOU FERRY RD
9	84	10404 BIRCHWOOD PIKE
10	66	BIRCHWOOD PIKE AT LYNN RD.
11	45	TVA PUBLIC USE AREA
12	14	WARE BRANCH LANE
13	2	6304 DOGWOOD DR.
14	19	HENRY RD.
15	48	GAMBLE RD. (BOX 279)
16	65	GAMBLE RD.
17	90	DOLLY POND ROAD
18	111	NEW SHEPHERD HILL CHURCH
19	135	TVA SUBSTATION
20	158	BIRCHWOOD PIKE
21	184	3RD UTILITY POLE, HWY 58
22	233	NORTHGATE MALL
23	219	GOLD PT. CIRCLE RD.
24	241	DALLAS SCHOOL
25	235	HARBOR LIGHTS MARINA
26	248	N. OF BASE BAY MARINA
27	266	HIXSON PIKE & IGOU FERRY RD.
28	291	HIXSON PIKE S. OF IGOU FERRY RD.
29	309	EXXON STATION
30	330	IGOU FERRY RD. & STONESAGE RD.
31	339	STONESAGE RD. AT POINT PLACE RD.
32	355	ARMSTRONG RD.
33	334	CERA CLUB
34	317	DALLAS HOLLOW RD.
35	277	SODDY-DAISY OFF DEPOT RD.
36	283	JOHN H. ALLEN SCHOOL
37	273	SEQUOYHA HEALTH CENTER
38	302	FIRST BAPTIST CHURCH (DUNLAP)
39	290	HWY. 127 & HWY. 28
40	289	HWY. 127 S. OF DUNLAP
41	318	SODDY ELEMENTARY SCHOOL

NRC TLD DOSES FOR SEQUOYAH AREA



Miles

0 2 4

Legend

- | | | |
|------------|-----------|-------------|
| Water | Railroads | Plant..site |
| — Highways | - - Roads | * |

SHOREHAM

TLD Direct Radiation Environmental Monitoring
 For the period 930915-940127 135 Days
 Field Time: 84 Days

NRC Sta	Location	Gross Exposure (mR)	Net Exposure Rate (mR/Std. Qtr.)	Hist. Range Net Exp Rate +-1 Std Dev
	Azimuth/Dist (Deg)/(Mi)	+-Rdm; Tot.	+-Rdm; Tot.	
1	262	10.0	17.9 +- 0.5; 2.7	13.0 +- 0.7; 4.3
2	268	4.4	18.1 +- 0.5; 2.7	13.3 +- 0.7; 4.3
3	256	3.2	Missing Dosimeter	No Net Data
4	268	2.1	18.7 +- 0.6; 2.8	14.0 +- 0.7; 4.3
5	243	1.7	18.8 +- 0.6; 2.8	14.0 +- 0.7; 4.3
7	136	1.5	20.5 +- 0.6; 3.1	15.9 +- 0.8; 4.6
8	116	0.9	21.6 +- 0.6; 3.2	17.1 +- 0.8; 4.7
9	91	0.8	17.9 +- 0.5; 2.7	13.1 +- 0.7; 4.3
10	73	0.7	17.0 +- 0.5; 2.6	12.1 +- 0.7; 4.2
11	62	0.7	15.8 +- 0.5; 2.4	10.8 +- 0.7; 4.0
12	75	1.6	17.4 +- 0.5; 2.6	12.6 +- 0.7; 4.2
13	88	2.1	18.7 +- 0.6; 2.8	14.0 +- 0.7; 4.3
14	119	4.6	17.5 +- 0.5; 2.6	12.6 +- 0.7; 4.2
15	110	10.0	17.5 +- 0.5; 2.6	12.6 +- 0.7; 4.2
16	138	14.0	17.6 +- 0.5; 2.6	12.8 +- 0.7; 4.2
17	162	12.0	17.0 +- 0.5; 2.6	12.1 +- 0.7; 4.2
18	174	11.0	20.7 +- 0.6; 3.1	16.1 +- 0.8; 4.6
19	189	5.1	17.9 +- 0.5; 2.7	13.1 +- 0.7; 4.3
21	163	2.5	Missing Dosimeter	No Net Data
22	149	1.5	18.8 +- 0.6; 2.8	14.0 +- 0.7; 4.4
23	177	1.3	17.2 +- 0.5; 2.6	12.3 +- 0.7; 4.2
24	196	1.2	17.9 +- 0.5; 2.7	13.0 +- 0.7; 4.2
25	217	1.5	16.1 +- 0.5; 2.4	11.1 +- 0.7; 4.1
26	215	4.6	16.3 +- 0.5; 2.5	11.4 +- 0.7; 4.1
27	205	4.2	17.4 +- 0.5; 2.6	12.6 +- 0.7; 4.2
28	233	11.0	17.5 +- 0.5; 2.6	12.6 +- 0.7; 4.2
29	224	13.0	15.6 +- 0.5; 2.3	10.6 +- 0.6; 4.0
30	202	14.0	18.5 +- 0.6; 2.8	13.7 +- 0.7; 4.3
31	210	15.0	16.8 +- 0.5; 2.5	11.9 +- 0.7; 4.1
32	210	15.0	18.4 +- 0.6; 2.8	13.6 +- 0.7; 4.3
33	210	15.0	16.9 +- 0.5; 2.5	12.0 +- 0.7; 4.1
34	27	0.2	15.5 +- 0.5; 2.3	10.5 +- 0.6; 4.0
35	50	0.3	19.4 +- 0.6; 2.9	14.6 +- 0.7; 4.4
36	133	3.9	18.0 +- 0.5; 2.7	13.2 +- 0.7; 4.3

Transit Dose = 5.7 +- 0.4; 2.9

SMOREHAM

For the period 930915-940127

TLD Direct Radiation Environmental Monitoring

Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	No Data +- No Data	0
11.26 - 33.75 NNE	10.5 +- 0.0	1
33.76 - 56.25 NE	14.6 +- 0.0	1
56.26 - 78.75 ENE	11.8 +- 0.9	3
78.76 - 101.25 E	13.5 +- 0.6	2
101.26 - 123.75 ESE	14.1 +- 2.6	3
123.76 - 146.25 SE	14.0 +- 1.7	3
146.26 - 168.75 SSE	13.1 +- 1.3	2
168.76 - 191.25 S	13.8 +- 2.0	3
191.26 - 213.75 SSW	13.1 +- 0.6	3
213.76 - 236.25 SW	11.4 +- 0.8	4
236.26 - 258.75 WSW	14.0 +- 0.0	1
258.76 - 281.25 W	13.4 +- 0.5	3
281.26 - 303.75 WNW	No Data +- No Data	0
303.76 - 326.25 NW	No Data +- No Data	0
326.26 - 348.75 NNW	No Data +- No Data	0

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	13.2 +- 1.9	13
2 - 5	13.0 +- 0.9	7
> 5	12.9 +- 1.5	9
Upwind Control	12.5 +- 1.0	3

SHOREHAM

TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	262	10.0
2	268	4.4
3	256	3.2
4	268	2.1
5	243	1.7
7	136	1.5
8	116	0.9
9	91	0.8
10	73	0.7
11	62	0.7
12	75	1.6
13	88	2.1
14	119	4.6
15	110	10.0
16	138	14.0
17	162	12.0
18	174	11.0
19	189	5.1
21	163	2.5
22	149	1.5
23	177	1.3
24	196	1.2
25	217	1.5
26	215	4.6
27	205	4.2
28	233	11.0
29	224	13.0
30	202	14.0
31	210	15.0
32	210	15.0
33	210	15.0
34	27	0.2
35	50	0.3
36	133	3.9

NRC TLD DOSES FOR SHOREHAM AREA



SOUTH TEXAS

TLD Direct Radiation Environmental Monitoring
 For the period 930913-940208 149 Days
 Field Time: 99 Days

NRC Sta	Location	Gross Exposure (mR)	Net Exposure Rate (mR/Std. Qtr.)	Hist. Range Net Exp Rate +1 Std Dev
	Azimuth/Dist (Deg)/(Mi)	+Rdm; Tot.	+Rdm; Tot.	+1 Std Dev
1	90	1.0	23.8 +- 0.7; 3.6	16.3 +- 2.5
2	63	1.0	24.6 +- 0.7; 3.7	17.3 +- 2.1
3	40	1.0	23.9 +- 0.7; 3.6	17.8 +- 2.0
4	19	1.0	22.5 +- 0.7; 3.4	16.8 +- 2.1
5	4	0.9	22.4 +- 0.7; 3.4	16.7 +- 2.0
6	339	0.9	23.6 +- 0.7; 3.5	17.0 +- 2.2
7	318	1.0	22.6 +- 0.7; 3.4	16.4 +- 2.0
8	294	1.1	26.1 +- 0.8; 3.9	19.3 +- 2.2
9	267	1.3	26.9 +- 0.8; 4.0	19.4 +- 2.0
10	126	0.3	22.1 +- 0.7; 3.3	15.4 +- 2.0
11	180	0.1	23.6 +- 0.7; 3.5	16.0 +- 2.8
12	257	0.5	21.9 +- 0.7; 3.3	14.9 +- 2.2
13	262	0.9	21.1 +- 0.6; 3.2	15.1 +- 2.2
14	250	1.3	22.0 +- 0.7; 3.3	15.5 +- 2.0
15	227	2.4	21.8 +- 0.7; 3.3	14.3 +- 2.1
16	210	3.7	20.5 +- 0.6; 3.1	13.9 +- 2.2
17	175	3.6	19.6 +- 0.6; 2.9	14.2 +- 2.0
18	158	3.7	21.0 +- 0.6; 3.1	14.3 +- 2.0
19	143	3.3	19.2 +- 0.6; 2.9	14.0 +- 2.3
20	122	2.3	21.4 +- 0.6; 3.2	15.4 +- 2.5
21	121	1.1	20.9 +- 0.6; 3.1	14.9 +- 2.2
22	257	2.5	24.1 +- 0.7; 3.6	16.3 +- 2.0
23	262	4.5	26.8 +- 0.8; 4.0	18.6 +- 2.0
24	282	4.7	23.0 +- 0.7; 3.4	16.7 +- 2.4
25	304	5.8	23.3 +- 0.7; 3.5	15.3 +- 2.3
26	242	5.4	23.3 +- 0.7; 3.5	16.5 +- 2.3
27	223	5.0	23.5 +- 0.7; 3.5	16.4 +- 2.3
28	236	9.6	21.5 +- 0.6; 3.2	14.5 +- 2.4
29	259	10.0	23.8 +- 0.7; 3.6	15.7 +- 2.1
30	291	6.2	22.4 +- 0.7; 3.4	16.7 +- 1.8
31	323	7.8	23.7 +- 0.7; 3.6	18.1 +- 5.4
32	335	7.4	29.2 +- 0.9; 4.4	21.0 +- 2.1
33	351	5.5	21.9 +- 0.7; 3.3	14.8 +- 2.2
34	88	4.4	20.6 +- 0.6; 3.1	15.3 +- 2.2
35	89	6.7	20.7 +- 0.6; 3.1	14.6 +- 2.3
36	121	3.9	Missing Dosimeter No Data	16.1 +- 2.6
37	145	8.8	21.8 +- 0.7; 3.3	14.6 +- 2.0
38	297	12.0	20.9 +- 0.6; 3.1	14.9 +- 2.3
39	321	9.3	24.1 +- 0.7; 3.6	17.6 +- 2.1
40	353	12.0	21.1 +- 0.6; 3.2	14.3 +- 1.8
41	13	18.0	22.4 +- 0.7; 3.4	15.9 +- 2.1
42	21	5.7	25.0 +- 0.8; 3.8	16.6 +- 2.4
43	39	5.8	24.9 +- 0.7; 3.7	17.0 +- 2.0
44	53	5.1	23.1 +- 0.7; 3.5	18.4 +- 2.5
45	69	7.3	21.1 +- 0.6; 3.2	14.9 +- 2.3
46	66	17.0	27.2 +- 0.8; 4.1	19.2 +- 1.8

Transit Dose = 3.5 +- 0.3; 3.2

SOUTH TEXAS
For the period 930913-940208

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	17.0 +- 0.4	2
11.26 - 33.75 NNE	18.5 +- 1.6	2
33.76 - 56.25 NE	18.6 +- 0.8	3
56.26 - 78.75 ENE	19.0 +- 2.8	3
78.76 - 101.25 E	16.6 +- 1.6	3
101.26 - 123.75 ESE	16.1 +- 0.3	2
123.76 - 146.25 SE	16.0 +- 1.5	3
146.26 - 168.75 SSE	15.9 +- 0.0	1
168.76 - 191.25 S	16.5 +- 2.6	2
191.26 - 213.75 SSW	15.5 +- 0.0	1
213.76 - 236.25 SW	17.1 +- 1.0	3
236.26 - 258.75 WSW	17.6 +- 1.0	4
258.76 - 281.25 W	19.3 +- 2.5	4
281.26 - 303.75 WNW	18.5 +- 1.8	3
303.76 - 326.25 NW	18.2 +- 0.6	4
326.26 - 348.75 NNW	20.8 +- 3.6	2

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	18.0 +- 1.5	15
2 - 5	16.8 +- 2.0	11
> 5	18.3 +- 2.0	16
Upwind Control	16.4 +- 0.7	3

SOUTH TEXAS
TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	90	1.0
2	63	1.0
3	40	1.0
4	19	1.0
5	4	0.9
6	339	0.9
7	318	1.0
8	294	1.1
9	267	1.3
10	126	0.3
11	180	0.1
12	257	0.5
13	262	0.9
14	250	1.3
15	227	2.4
16	210	3.7
17	175	3.6
18	158	3.7
19	143	3.3
20	122	2.3
21	121	1.1
22	257	2.5
23	262	4.5
24	282	4.7
25	304	5.8
26	242	5.4
27	223	5.0
28	236	9.6
29	259	10.0
30	291	6.2
31	323	7.8
32	335	7.4
33	351	5.5
34	88	4.4
35	89	6.7
36	121	3.9
37	145	8.8
38	297	12.0
39	321	9.3
40	353	12.0
41	13	18.0
42	21	5.7
43	39	5.8
44	53	5.1
45	69	7.3
46	66	17.0
		NW CORNER OF STPEGS VISITORS CENTER
		W SIDE OF FM 521(0.5 MI NNW OF TLD #1)
		E SIDE OF FM 521(0.4 MI NNW OF TLD#2)
		N SIDE OF FM 521(0.4 MI NW OF TLD#3)
		S SIDE OF FM 521(0.3 MI W OF TLD#4)
		S FIDE OF FM 521(0.4 MI W OF TLD#5)
		S SIDE OF FM 521(0.4MI WSW OF TLD#6)
		S SIDE OF FM 521(0.5 MI SW OF TLD#7)
		S SIDE OF FM 521(0.6 MI SSW OF TLD#8)
		ON DIKE OF RESERVOIR
		INTERSECTION OF FM 521 & CANAL
		0.1MI N OF FM 521 & FM 1095
		1.9 MI N OF FM 521 AND FM 1095
		E OF FM 521 & WILSON CR CEMETERY RD.
		SW OF FM 1095 AND ELLIS ROAD
		1.4 MI E OF FM 1095 & CITRUS GROVE RD.
		0.1 MI S OF FM 1095 & KING RD.(WHITE BLDG.)
		0.1 MI W OF HWY 35 & HARRISON RD.
		TRES PALASIOS OAKS,E OF FM 2853
		1.1MI E OF FM 1045 & ROAD PARALLEL TO RR.
		1.7 MI E OF TLD# 31
		2.2MI S OF FM 1468 & ROAD PARALLEL TO RR.
		1.4 MI E OF COLORADO RIVER BRIDGE
		AT OXYCHEM PLANT ON HWY 60
		3.1 MI W OF HWY 60 & RD TO SELKIRK IS.
		NE OF LEWIS & MARKET STREETS
		BLESSING WATER TOWER, BLESSING
		0.1 MI SW OF HWY 35 & FM 1045
		MARKHAM POST OFFICE, MARKHAM
		0.4MI W OF HWY 60 & THOMPSON DR., BAY CITY
		NE OF CELANESE PLANT
		0.8MI S OF FM 3057 & FM 2668
		1.7MI SE OF TLD#43(W OF FM 2668)
		SW CORNER OF HWY 60 AND FM 2078
		11.4MI E OF HWY 60 & FM 521,ON 521

NRC TLD DOSES FOR SOUTH TEXAS AREA

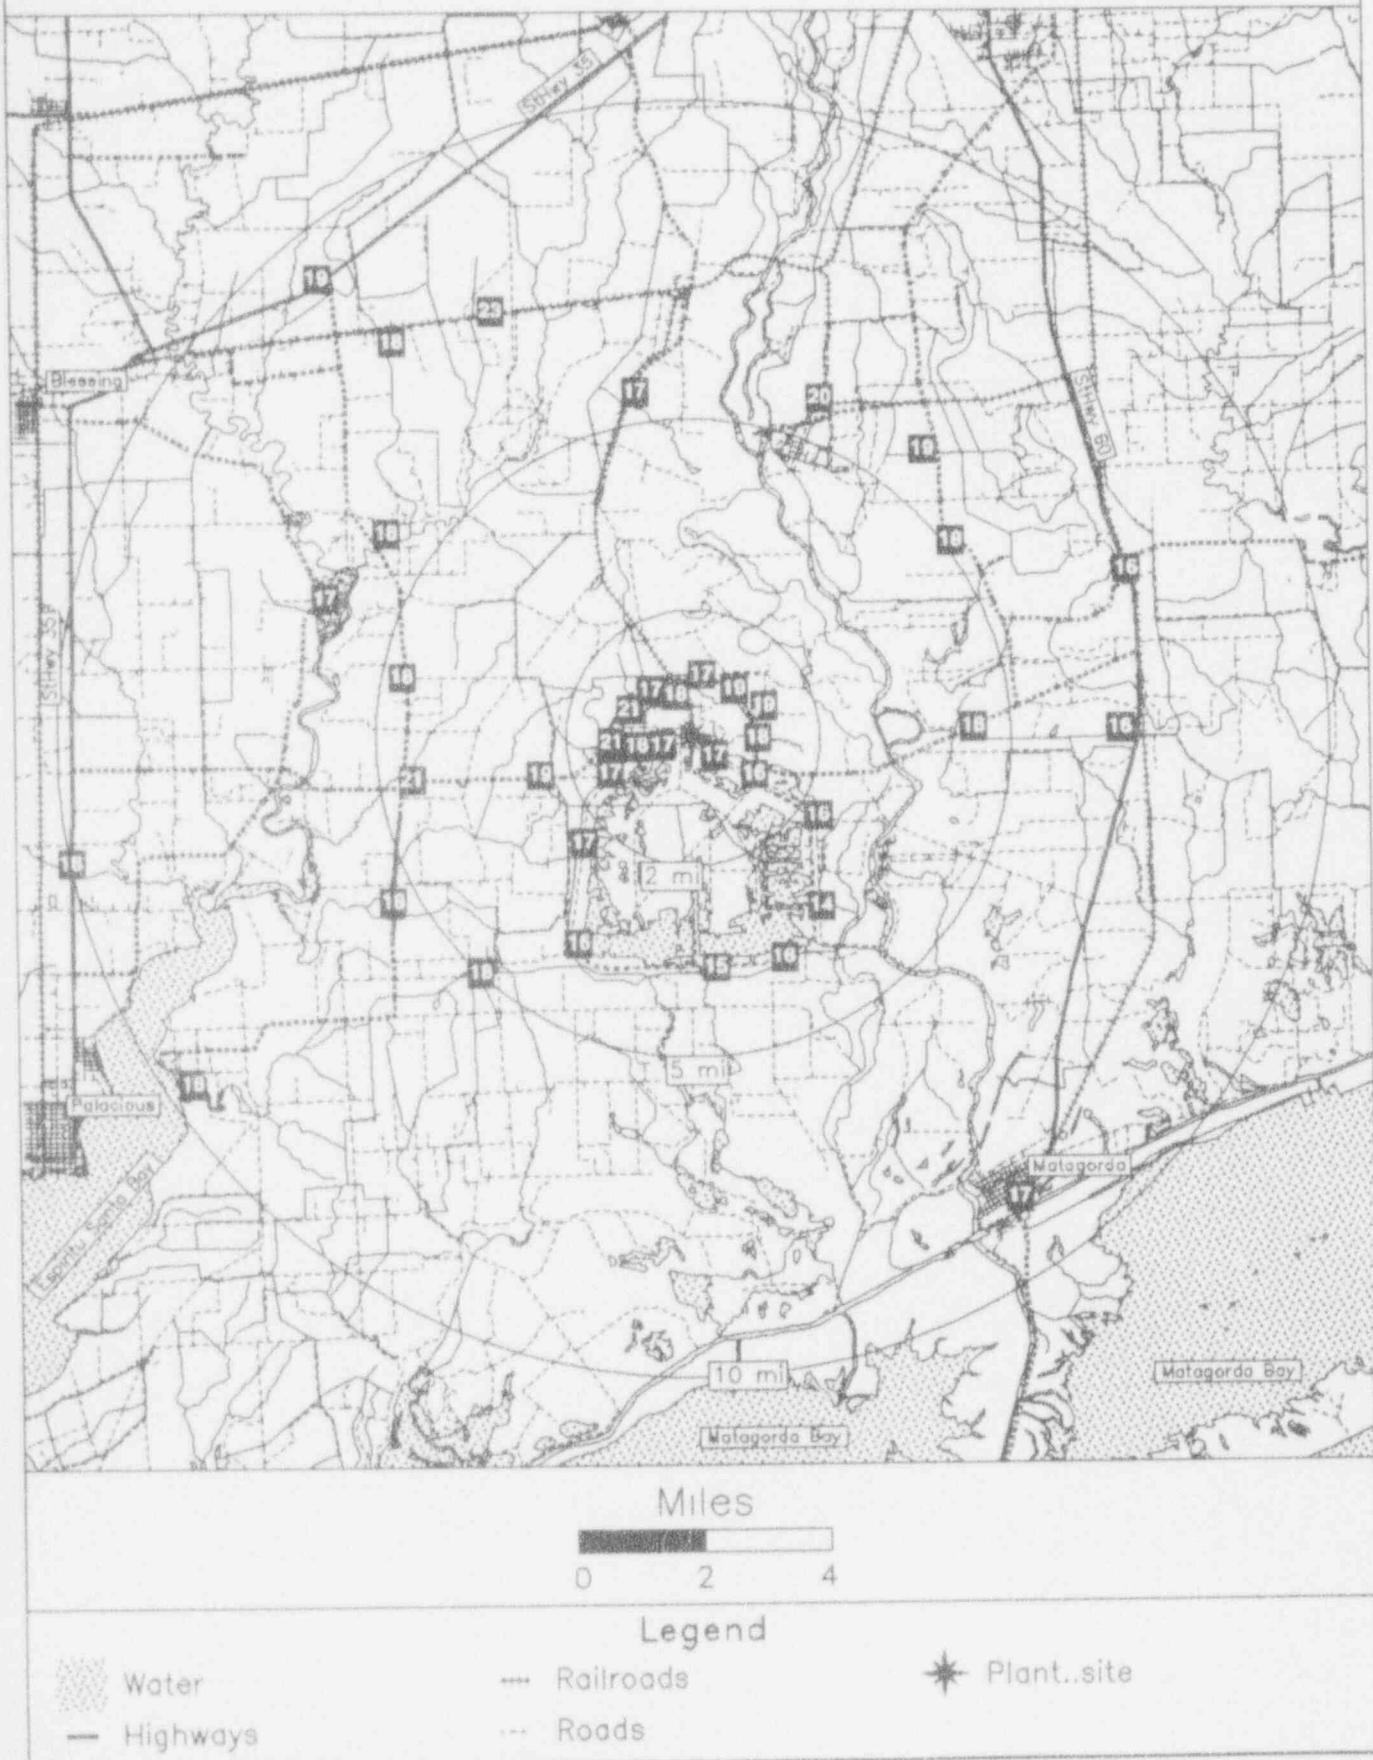

ST. LUCIE

TLD Direct Radiation Environmental Monitoring
 For the period 930914-940203 143 Days
 Field Time: 99 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	20	0.3	18.3 +- 0.6; 2.8	15.1 +- 0.6; 3.7
2	45	0.2	17.6 +- 0.5; 2.6	14.5 +- 0.6; 3.6
3	67	0.2	16.6 +- 0.5; 2.5	13.6 +- 0.5; 3.6
4	92	0.3	17.7 +- 0.5; 2.6	14.5 +- 0.6; 3.6
5	115	0.4	Damaged Dosimeter	No Net Data
6	143	1.1	15.9 +- 0.5; 2.4	12.9 +- 0.5; 3.5
7	150	2.0	14.4 +- 0.4; 2.2	11.6 +- 0.5; 3.4
8	154	4.7	16.8 +- 0.5; 2.5	13.7 +- 0.5; 3.6
9	152	23.0	16.9 +- 0.5; 2.5	13.8 +- 0.5; 3.6
10	152	23.0	16.5 +- 0.5; 2.5	13.5 +- 0.5; 3.5
11	152	23.0	17.9 +- 0.5; 2.7	14.7 +- 0.6; 3.7
12	168	14.0	16.5 +- 0.5; 2.5	13.4 +- 0.5; 3.5
13	185	10.0	17.1 +- 0.5; 2.6	14.0 +- 0.5; 3.6
14	183	11.0	16.5 +- 0.5; 2.5	13.4 +- 0.5; 3.5
15	170	8.0	16.3 +- 0.5; 2.4	13.2 +- 0.5; 3.5
16	196	7.0	16.9 +- 0.5; 2.5	13.8 +- 0.5; 3.6
17	229	7.9	18.8 +- 0.6; 2.8	15.5 +- 0.6; 3.7
18	250	6.6	Missing Dosimeter	No Net Data
19	247	4.8	16.2 +- 0.5; 2.4	13.2 +- 0.5; 3.5
20	229	5.0	16.2 +- 0.5; 2.4	13.2 +- 0.5; 3.5
21	208	3.8	16.3 +- 0.5; 2.4	13.2 +- 0.5; 3.5
22	187	3.8	17.7 +- 0.5; 2.7	14.5 +- 0.6; 3.6
23	203	2.6	17.1 +- 0.5; 2.6	14.0 +- 0.5; 3.6
24	245	1.9	16.3 +- 0.5; 2.4	13.2 +- 0.5; 3.5
25	280	2.2	Missing Dosimeter	No Net Data
26	299	3.1	16.5 +- 0.5; 2.5	13.4 +- 0.5; 3.5
27	305	3.8	16.2 +- 0.5; 2.4	13.2 +- 0.5; 3.5
28	276	4.0	15.8 +- 0.5; 2.4	12.8 +- 0.5; 3.5
29	293	5.8	16.9 +- 0.5; 2.5	13.8 +- 0.5; 3.6
30	316	7.7	16.9 +- 0.5; 2.5	13.8 +- 0.5; 3.6
32	300	11.0	17.1 +- 0.5; 2.6	14.0 +- 0.5; 3.6
33	322	8.7	16.9 +- 0.5; 2.5	13.8 +- 0.5; 3.6
34	339	8.8	17.0 +- 0.5; 2.5	13.9 +- 0.5; 3.6
35	342	2.9	16.0 +- 0.5; 2.4	13.0 +- 0.5; 3.5
36	346	1.9	17.9 +- 0.5; 2.7	14.7 +- 0.6; 3.7
37	353	1.0	17.4 +- 0.5; 2.6	14.2 +- 0.5; 3.6
38	226	2.0	Missing Dosimeter	No Net Data

Transit Dose = 1.7 +- 0.3; 3.0

ST. LUCIE
For the period 930914-940203

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	14.2 +- 0.0	1
11.26 - 33.75 NNE	15.1 +- 0.0	1
33.76 - 56.25 NE	14.5 +- 0.0	1
56.26 - 78.75 ENE	13.6 +- 0.0	1
78.76 - 101.25 E	14.5 +- 0.0	1
101.26 - 123.75 ESE	No Data +- No Data	0
123.76 - 146.25 SE	12.9 +- 0.0	1
146.26 - 168.75 SSE	12.9 +- 1.2	3
168.76 - 191.25 S	13.8 +- 0.6	4
191.26 - 213.75 SSW	13.7 +- 0.4	3
213.76 - 236.25 SW	14.3 +- 1.7	2
236.26 - 258.75 WSW	13.2 +- 0.1	2
258.76 - 281.25 W	12.8 +- 0.0	1
281.26 - 303.75 WNW	13.7 +- 0.3	3
303.76 - 326.25 NW	13.6 +- 0.4	3
326.26 - 348.75 NNW	13.9 +- 0.8	3

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	13.8 +- 1.1	9
2 - 5	13.4 +- 0.5	10
> 5	13.9 +- 0.6	11
Upwind Control	14.0 +- 0.6	3

ST. LUCIE
TLD Direct Radiation Environmental Monitoring

NRC Station	Location	Azimuth / Distance Degree / Mile	Description
1		20	0.3 RT. A1A - BIG MUD CREEK
2		45	0.2 RT. A1A
3		67	0.2 RT. A1A
4		92	0.3 RT. A1A
5		115	0.4 RT. A1A
6		143	1.1 RT. A1A
7		150	2.0 RT. A1A
8		154	4.7 RT. A1A - OCEANA CONDOMINIUMS
9		152	23.0 HOBE SOUND
10		152	23.0 HOBE SOUND
11		152	23.0 HOBE SOUND
12		168	14.0 PORT SALERNO
13		185	10.0 STUART
14		183	11.0 STUART SUBSTATION
15		170	8.0 JENSEN BEACH
16		196	7.0 JENSEN BEACH SUBSTATION
17		229	7.9 PORT ST. LUCIE
18		250	6.6 PORT ST. LUCIE BAPTIST CHURCH
19		247	4.8 RT. 1
20		229	5.0 RT. 1 & WALTON RD.
21		208	3.8 WALTON RD.
22		187	3.8 RT. 707
23		203	2.6 RT. 707
24		245	1.9 RT. 707
25		280	2.2 RT. 707
26		299	3.1 RT. 707
27		305	3.8 RT. 707 & RT. 712
28		276	4.0 SILVER OAK DR.
29		293	5.8 WHITE CITY SUBSTATION
30		316	7.7 SUNRISE BLVD. & VIRGINIA AVE.
32		300	11.0 UNIV. OF FLA. AGRICULTURAL RESEARCH CENTER
33		322	8.7 ST. LUCIE COUNTY HEALTH DEPT.
34		339	8.8 RT. A1A & HERNANDO ST.
35		342	2.9 RT. A1A
36		346	1.9 RT. A1A - LITTLE MUD CREEK
37		353	1.0 RT. A1A - BLIND CREEK
38		226	2.0 RT. 707

NRC TLD DOSES FOR ST. LUCIE AREA

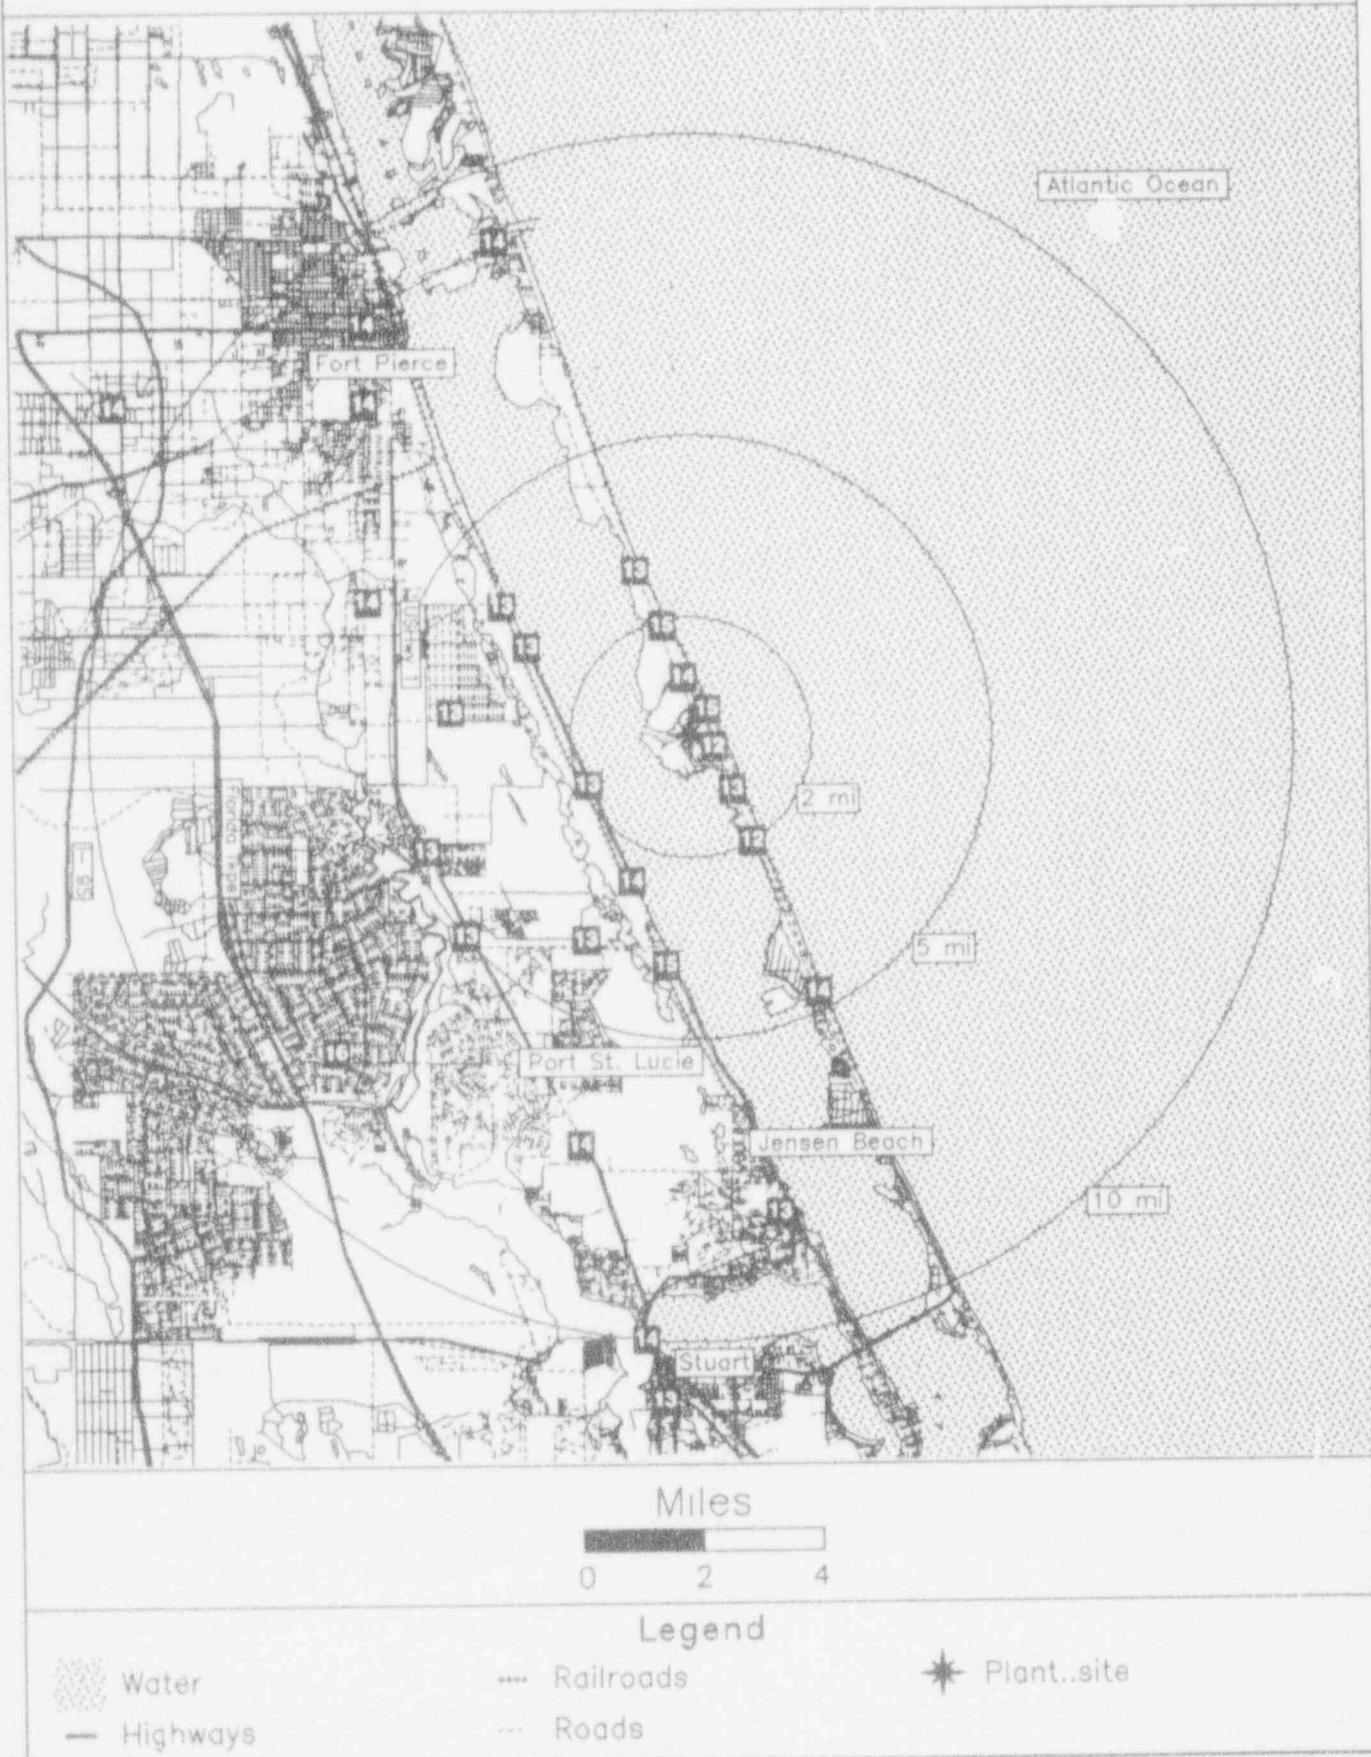

SUMMER

TLD Direct Radiation Environmental Monitoring
 For the period 930914-940201 141 Days
 Field Time: 104 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) --Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) --Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	199	3.7	28.0 +- 0.8; 4.2	18.9 +- 0.8; 4.7
2	111	1.0	27.2 +- 0.8; 4.1	18.2 +- 0.8; 4.7
3	340	4.1	28.9 +- 0.9; 4.3	19.7 +- 0.8; 4.8
4	192	9.3	30.0 +- 0.9; 4.5	20.6 +- 0.9; 5.0
5	72	1.8	29.2 +- 0.9; 4.4	19.9 +- 0.9; 4.9
6	54	1.5	31.5 +- 0.9; 4.7	21.9 +- 0.9; 5.1
7	46	3.0	34.8 +- 1.0; 5.2	24.8 +- 1.0; 5.5
8	31	3.0	38.3 +- 1.1; 5.7	27.8 +- 1.1; 5.8
9	13	3.9	37.9 +- 1.1; 5.7	27.4 +- 1.1; 5.8
10	7	4.0	35.6 +- 1.1; 5.3	25.5 +- 1.0; 5.5
11	349	4.3	33.0 +- 1.0; 4.9	23.2 +- 0.9; 5.3
12	323	5.0	33.7 +- 1.0; 5.1	23.8 +- 1.0; 5.3
13	333	3.0	36.2 +- 1.1; 5.4	26.0 +- 1.0; 5.6
14	255	2.8	28.2 +- 0.8; 4.2	19.0 +- 0.8; 4.8
15	308	5.6	32.1 +- 1.0; 4.8	22.4 +- 0.9; 5.2
16	64	3.5	39.0 +- 1.2; 5.9	28.4 +- 1.1; 5.9
17	98	3.1	33.7 +- 1.0; 5.1	23.8 +- 1.0; 5.3
18	114	3.5	33.7 +- 1.0; 5.1	23.8 +- 1.0; 5.3
19	132	2.0	30.0 +- 0.9; 4.5	20.6 +- 0.9; 5.0
20	152	4.5	21.1 +- 0.6; 3.2	12.9 +- 0.7; 4.1
21	133	4.1	25.4 +- 0.8; 3.8	16.7 +- 0.8; 4.5
22	157	2.4	29.4 +- 0.9; 4.4	20.1 +- 0.9; 4.9
23	173	2.4	31.2 +- 0.9; 4.7	21.6 +- 0.9; 5.1
24	185	3.9	29.2 +- 0.9; 4.4	20.0 +- 0.9; 4.9
25	210	3.3	28.3 +- 0.8; 4.2	19.1 +- 0.8; 4.8
26	217	3.3	27.5 +- 0.8; 4.1	18.4 +- 0.8; 4.7
27	231	3.1	22.8 +- 0.7; 3.4	14.4 +- 0.7; 4.3
28	267	2.7	31.0 +- 0.9; 4.7	21.5 +- 0.9; 5.1
29	276	3.4	33.0 +- 1.0; 5.0	23.2 +- 0.9; 5.3
30	293	3.8	Missing Dosimeter	No Net Data
31	244	3.6	27.6 +- 0.8; 4.1	18.5 +- 0.8; 4.7
32	247	6.2	32.9 +- 1.0; 4.9	23.1 +- 0.9; 5.2
33	218	9.0	30.1 +- 0.9; 4.5	20.7 +- 0.9; 5.0
34	192	9.3	30.1 +- 0.9; 4.5	20.7 +- 0.9; 5.0
35	184	14.1	25.8 +- 0.8; 3.9	17.0 +- 0.8; 4.5
36	183	14.6	20.7 +- 0.6; 3.1	12.5 +- 0.7; 4.1
37	182	14.8	20.0 +- 0.6; 3.0	11.9 +- 0.6; 4.0
38	148	20.8	29.2 +- 0.9; 4.4	19.9 +- 0.8; 4.9
39	140	25.0	30.7 +- 0.9; 4.6	21.2 +- 0.9; 5.0
40	135	23.1	28.2 +- 0.8; 4.2	19.0 +- 0.8; 4.8

Transit Dose = 6.2 +- 0.4; 3.5

SUMMER

For the period 930914-940201

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	24.3 +- 1.6	2
11.26 - 33.75 NNE	27.6 +- 0.3	2
33.76 - 56.25 NE	23.3 +- 2.1	2
56.26 - 78.75 ENE	24.2 +- 6.0	2
78.76 - 101.25 E	23.8 +- 0.0	1
101.26 - 123.75 ESE	21.0 +- 4.0	2
123.76 - 146.25 SE	19.4 +- 2.0	4
146.26 - 168.75 SSE	17.6 +- 4.1	3
168.76 - 191.25 S	20.8 +- 1.2	2
191.26 - 213.75 SSW	19.8 +- 1.0	4
213.76 - 236.25 SW	17.8 +- 3.2	3
236.26 - 258.75 WSW	20.2 +- 2.5	3
258.76 - 281.25 W	22.4 +- 1.2	2
281.26 - 303.75 WNW	No Data +- No Data	0
303.76 - 326.25 NW	23.1 +- 1.0	2
326.26 - 348.75 NNW	22.8 +- 4.5	2

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	20.1 +- 1.5	4
2 - 5	21.6 +- 4.1	24
> 5	21.0 +- 1.3	8
Upwind Control	13.8 +- 2.7	3

SUMMER
 TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	199	WICKER'S STORE
2	111	RT. 311 (0.3 MILES W. OF RT. 215)
3	340	RT. 257 & RT. 383
4	192	RT. 215 (0.5 MILES N. OF RT. 113)
5	72	WHITE HALL SCHOOL
6	54	RT. 224 (0.5 MILES N. OF RT. 213/215)
7	46	RT. S.20.359
8	31	RT. 213/215 (0.5 MILES N. OF RT. 359)
9	13	RT. 215 & RT. 11
10	7	RT. 11 (0.7 MILES W. OF RT. 215)
11	349	RT. 11 (0.7 MILES E. OF RT. 257)
12	323	RT. 651 (2.2 MILES W. OF RT. 257)
13	333	RT. 257 (2.3 MILES S. OF RT. 283)
14	255	RT. 28 (CANNONS CREEK)
15	308	RT. 28 & RT. 97)
16	64	OLD BRICK CH.
17	98	RT. 247
18	114	STELLA HILL RESIDENCE
19	132	RT. 213/215
20	152	LOOKOUT TOWER RD.
21	133	ROCK HILL CH.
22	157	RT. 213
23	173	RT. 216
24	185	MOUNT HERMAN CH
25	210	RT. 28 (0.8 MILES N. OF RT. 213)
26	217	RT. 28 (1.2 MILES N. OF RT. 213)
27	231	RT. 28 (2.1 MILES N. OF RT. 213)
28	267	RT. 28 (1.6 MILES N OF RT. 33)
29	276	RT. 98 (0.5 MILES W. OF RT. 28)
30	293	PARR RESERVOIR
31	244	RT. 33 (0.8 MILES W. OF RT. 28)
32	247	POMARIA FIRE DEPT.
33	218	RT. 202 & RT. 76
34	192	RT. 76 & CLARK ST.
35	184	RT. 270 & PUTNAM RD.
36	183	RT. 270 (0.5 MILES S. OF PUTNAM RD.)
37	182	RT. 270 & RT. 1254
38	148	MAJIK MARKET
39	140	S.C. DEPT. OF HEALTH
40	135	RT. 321 & BUCKNER ST.

NRC TLD DOSES FOR SUMMER AREA

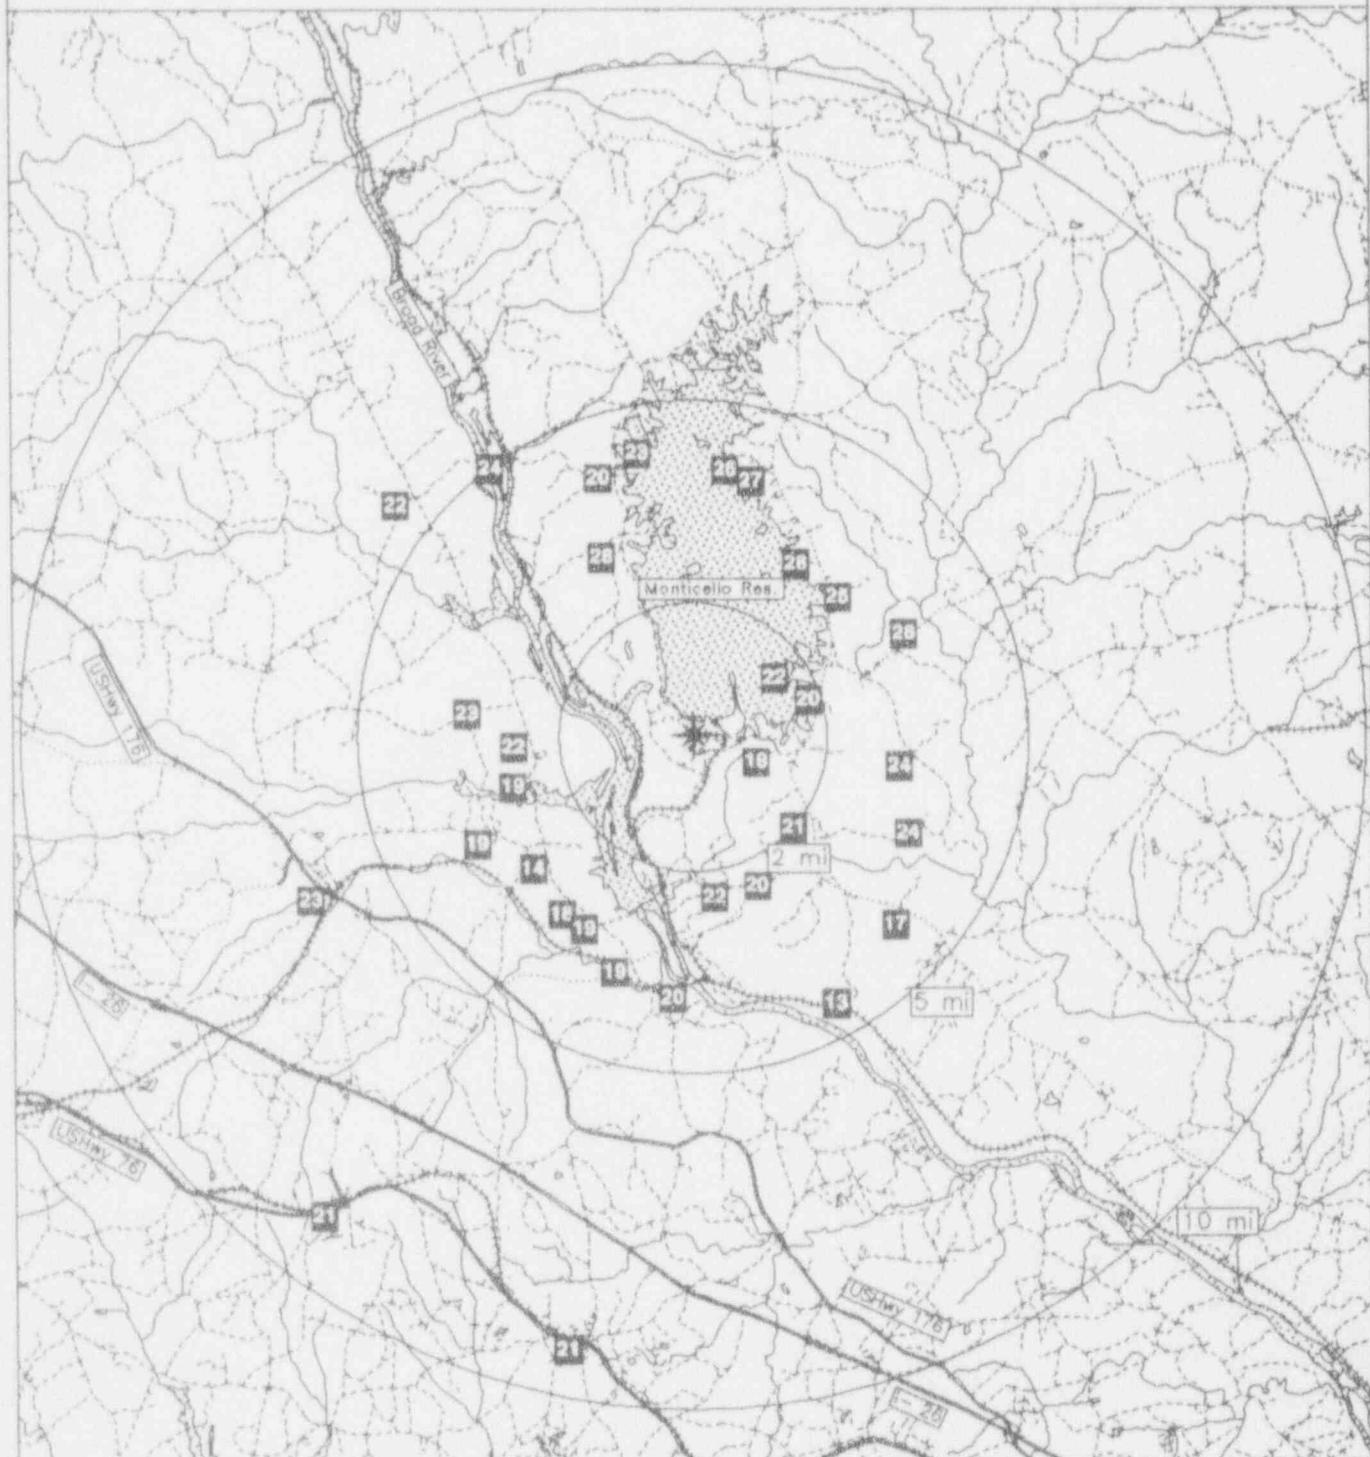


Miles

0 2 4

Legend

- Water
- Highways

- Railroads
- Roads



SURRY

TLD Direct Radiation Environmental Monitoring
 For the period 930914-940203 143 Days
 Field Time: 99 Days

NRC Sta	Location		Gross	Net Exposure Rate	Hist. Range
	Azimuth/Dist (Deg)/(Mi)		Exposure (mR) +-Rdm; Tot.	(mR/Std. Qtr.) +-Rdm; Tot.	Net Exp Rate +-1 Std Dev
1	18	19.0	21.4 +- 0.6; 3.2	15.4 +- 0.7; 4.1	15.7 +- 1.2
2	129	17.0	21.1 +- 0.6; 3.2	15.2 +- 0.7; 4.1	17.2 +- 1.3
3	162	17.0	21.9 +- 0.7; 3.3	15.9 +- 0.7; 4.2	15.9 +- 1.3
4	162	17.0	20.7 +- 0.6; 3.1	14.8 +- 0.7; 4.1	13.2 +- 1.6
5	156	5.1	24.2 +- 0.7; 3.6	18.0 +- 0.7; 4.4	17.7 +- 1.4
6	189	4.1	20.7 +- 0.6; 3.1	14.8 +- 0.7; 4.1	14.7 +- 1.6
7	202	2.2	22.2 +- 0.7; 3.3	16.2 +- 0.7; 4.2	14.7 +- 1.5
8	183	1.6	23.7 +- 0.7; 3.6	17.6 +- 0.7; 4.4	17.2 +- 1.3
9	243	0.2	27.2 +- 0.8; 4.1	20.7 +- 0.8; 4.7	20.2 +- 1.5
10	269	0.1	27.9 +- 0.8; 4.2	21.4 +- 0.8; 4.8	23.1 +- 2.6
11	304	0.1	26.3 +- 0.8; 3.9	19.9 +- 0.8; 4.6	23.6 +- 3.5
12	334	0.2	28.8 +- 0.9; 4.3	22.1 +- 0.9; 4.9	23.4 +- 2.5
13	10	1.2	22.8 +- 0.7; 3.4	16.7 +- 0.7; 4.3	16.3 +- 1.4
14	21	2.0	22.5 +- 0.7; 3.4	16.4 +- 0.7; 4.2	16.7 +- 1.5
15	203	4.5	22.1 +- 0.7; 3.3	16.1 +- 0.7; 4.2	15.2 +- 1.4
16	224	3.7	20.4 +- 0.6; 3.1	14.5 +- 0.7; 4.0	14.0 +- 1.2
17	212	2.0	23.9 +- 0.7; 3.6	17.7 +- 0.7; 4.4	17.2 +- 1.4
18	248	5.1	22.0 +- 0.7; 3.3	16.0 +- 0.7; 4.2	14.6 +- 1.5
19	259	8.1	22.9 +- 0.7; 3.4	16.8 +- 0.7; 4.3	15.3 +- 2.3
20	285	5.0	16.4 +- 0.5; 2.5	10.9 +- 0.6; 3.7	10.8 +- 1.5
21	270	4.1	25.2 +- 0.8; 3.8	18.9 +- 0.8; 4.5	18.7 +- 1.5
22	123	12.0	24.1 +- 0.7; 3.6	17.9 +- 0.7; 4.4	20.7 +- 2.7
23	102	11.0	28.3 +- 0.8; 4.2	21.7 +- 0.8; 4.8	22.8 +- 2.1
24	106	4.9	25.0 +- 0.8; 3.8	18.7 +- 0.8; 4.5	17.8 +- 1.5
25	90	5.2	23.1 +- 0.7; 3.5	17.0 +- 0.7; 4.3	17.0 +- 1.5
26	69	5.1	27.5 +- 0.8; 4.1	21.0 +- 0.8; 4.8	21.3 +- 1.6
27	23	5.3	25.3 +- 0.8; 3.8	19.0 +- 0.8; 4.5	18.4 +- 1.5
28	49	5.0	24.8 +- 0.7; 3.7	18.6 +- 0.8; 4.5	18.7 +- 1.6
29	7	6.8	23.5 +- 0.7; 3.5	17.3 +- 0.7; 4.3	17.9 +- 1.5
30	359	6.5	22.3 +- 0.7; 3.3	16.3 +- 0.7; 4.2	15.7 +- 1.5
31	1	4.6	19.5 +- 0.6; 2.9	13.7 +- 0.6; 4.0	13.3 +- 2.5
32	332	3.8	22.1 +- 0.7; 3.3	16.1 +- 0.7; 4.2	16.4 +- 1.8
33	314	5.4	25.2 +- 0.8; 3.8	18.9 +- 0.8; 4.5	17.5 +- 1.3
34	308	6.4	21.9 +- 0.7; 3.3	15.9 +- 0.7; 4.2	16.4 +- 1.6
35	348	5.3	21.0 +- 0.6; 3.2	15.1 +- 0.7; 4.1	15.5 +- 1.4
36	43	15.0	22.5 +- 0.7; 3.4	16.4 +- 0.7; 4.2	16.1 +- 1.5
37	340	15.0	20.8 +- 0.6; 3.1	14.9 +- 0.7; 4.1	14.4 +- 1.4
38	39	16.0	24.0 +- 0.7; 3.6	17.8 +- 0.7; 4.4	16.0 +- 2.4
39	153	1.9	Missing Dosimeter	No Net Data	18.6 +- 1.6
40	144	2.1	Missing Dosimeter	No Net Data	16.0 +- 1.7

Transit Dose = 4.4 +- 0.4; 3.2

SURRY
For the period 930914-940203

TLD Direct Radiation Environmental Monitoring

Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	16.0 +- 1.6	4
11.26 - 33.75 NNE	17.0 +- 1.8	3
33.76 - 56.25 NE	18.6 +- 0.0	1
56.26 - 78.75 ENE	21.0 +- 0.0	1
78.76 - 101.25 E	17.0 +- 0.0	1
101.26 - 123.75 ESE	19.4 +- 2.0	3
123.76 - 146.25 SE	15.2 +- 0.0	1
146.26 - 168.75 SSE	16.2 +- 1.6	3
168.76 - 191.25 S	16.2 +- 1.9	2
191.26 - 213.75 SSW	16.6 +- 0.9	3
213.76 - 236.25 SW	14.5 +- 0.0	1
236.26 - 258.75 WSW	18.4 +- 3.4	2
258.76 - 281.25 W	19.0 +- 2.3	3
281.26 - 303.75 WNW	10.9 +- 0.0	1
303.76 - 326.25 NW	18.2 +- 2.1	3
326.26 - 348.75 NNW	17.8 +- 3.8	3


Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	19.1 +- 2.2	8
2 - 5	15.8 +- 2.5	10
> 5	17.2 +- 2.0	17
Upwind Control	16.3 +- 1.5	3

SURRY

TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	18	HAMPTON COLISEUM
2	129	NEWPORT NEWS
3	162	W. SIDE JAMES R. (RT. 258)
4	162	SMITHFIELD SQ. SHOPPING CTR.
5	156	RUSHMERE SHORES
6	189	RT. 628 & RT. 617
7	202	CHIPPOAKS PLANTATION
8	183	RT. 650 & PUBLIC BOAT LANDING
9	243	0.2 MILES S. SURRY MAIN GATE
10	269	0.1 MILES S. SURRY MAIN GATE
11	304	SURRY MAIN GATE
12	334	0.1 MILES N. SURRY MAIN GATE
13	10	RT. 650 (1 MILE N. OF SURRY MAIN GATE)
14	21	HOMWOOD & VA AIR SAMPLER
15	203	BARONS CASTLE CH.
16	224	RT. 634 & RT. 633
17	212	CHIPPOAKS PLANTATION (WEST)
18	248	ALLIANCE INTERSECTION
19	259	LEBANON BAPT.CH. PKG.LOT
20	285	SCOTLAND FERRY DOCK
21	270	RT. 636 & RT. 637
22	123	HIDEN BLVD. & MADISON W.
23	102	PATRICK HENRY AIRPORT
24	106	WAGNER BLDG.
25	90	FORT EUSTICE
26	69	BADISCHE CORP.
27	23	BUSCHE GARDENS
28	49	RT. 667 (0.4 MILES OFF RT. 1)
29	7	RT. 637 (TRAILER PARK)
30	359	WILLIAMSBURG SEWAGE PLANT
31	1	COLONIAL NAT. HISTORIC PKWY.
32	332	NATIONAL MEMORIAL PARK SIGN
33	314	NATIONAL PARK MAINTENANCE AREA
34	308	JAMESTOWN FESTIVAL PARK
35	348	WILLIMSBURG JAMESTOWN AIRPORT
36	43	RT. 60 & RT. 607
37	340	RT. 60 & BUSH SPRING RD.
38	39	RT. 60 & CHICK HOMING ST.
39	153	PUBLIC BOAT LANDING RD.
40	144	PUBLIC BOAT LANDING

NRC TLD DOSES FOR SURRY AREA

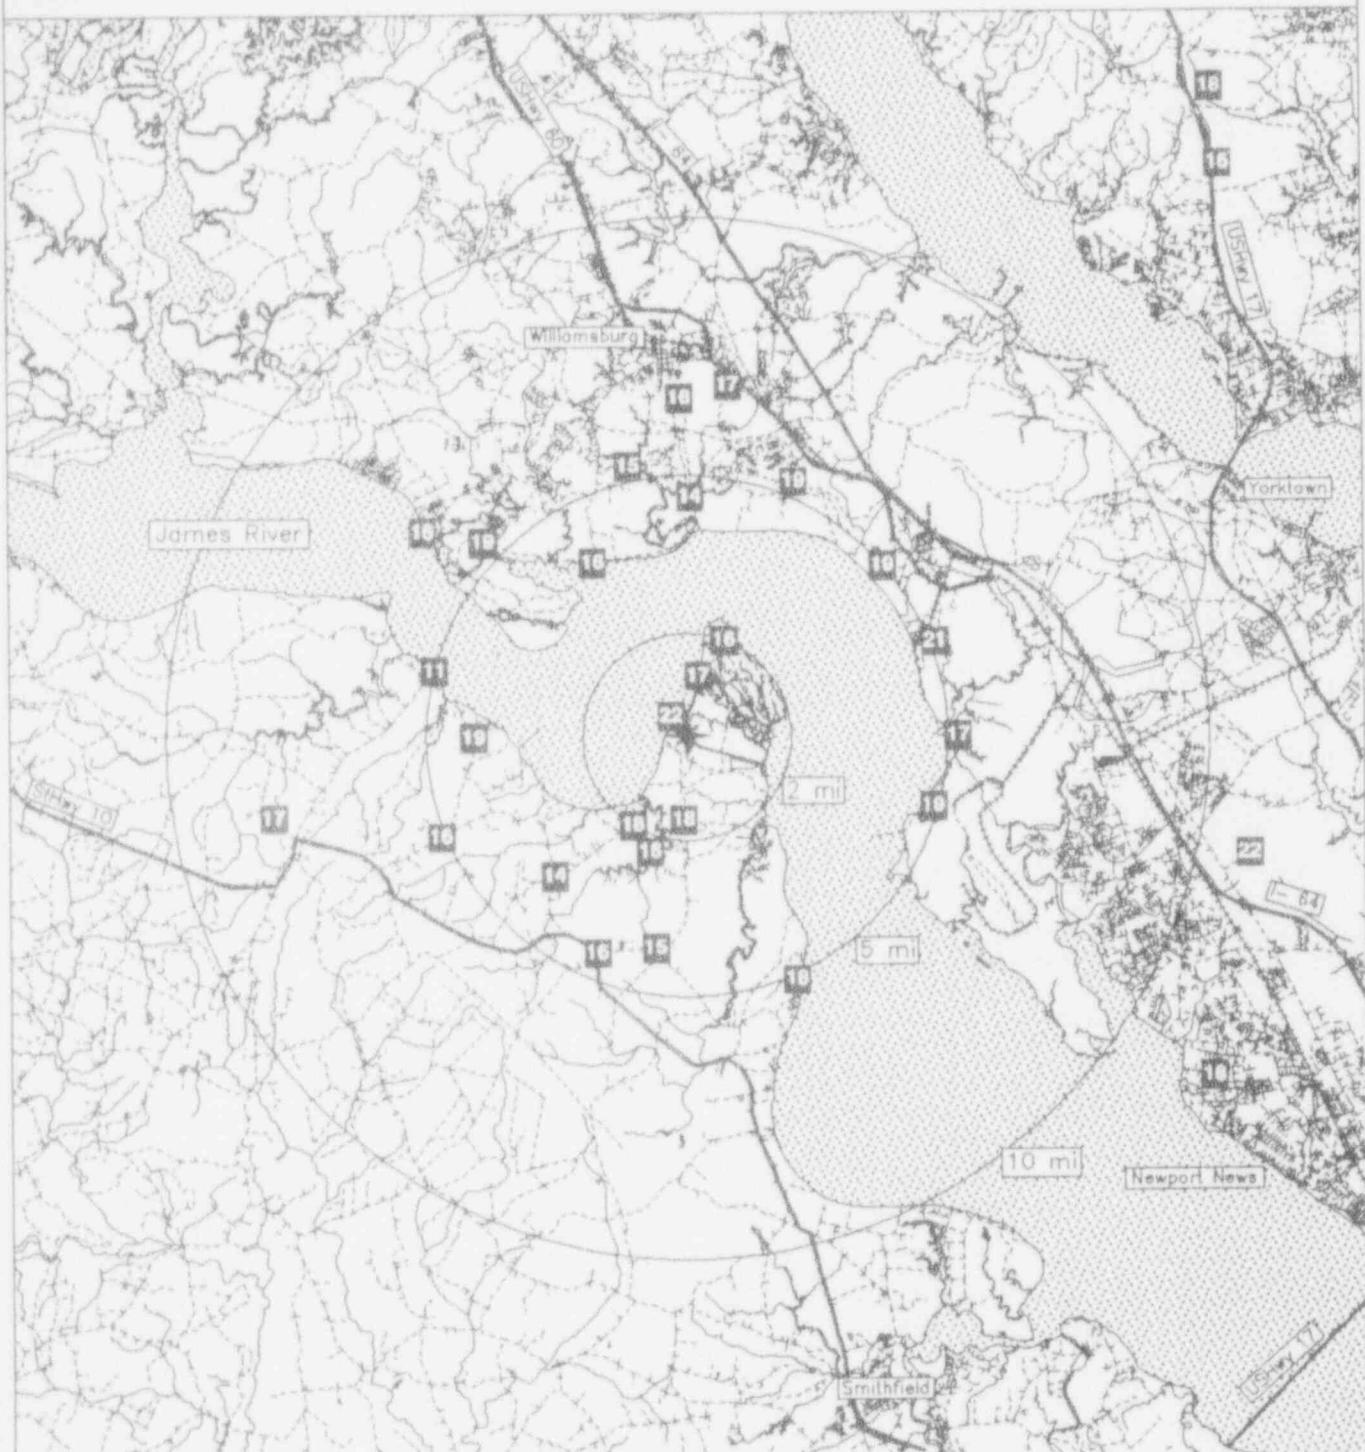

Miles

0 2 4

Legend

- Water
- Highways

- Railroads
- Roads



SUSQUEHANNA
 TLD Direct Radiation Environmental Monitoring
 For the period 930915-940127 135 Days
 Field Time: 92 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	19	1.4	22.9 +- 0.7; 3.4	19.5 +- 0.7; 4.4
2	358	1.4	23.9 +- 0.7; 3.6	20.4 +- 0.8; 4.5
3	332	1.6	21.4 +- 0.6; 3.2	18.0 +- 0.7; 4.2
4	315	1.8	21.3 +- 0.6; 3.2	17.9 +- 0.7; 4.2
5	287	1.7	24.1 +- 0.7; 3.6	20.6 +- 0.8; 4.5
6	270	1.3	22.5 +- 0.7; 3.4	19.1 +- 0.7; 4.4
7	239	1.8	21.4 +- 0.6; 3.2	18.1 +- 0.7; 4.2
8	217	2.0	25.8 +- 0.8; 3.9	22.3 +- 0.8; 4.7
9	201	1.5	23.1 +- 0.7; 3.5	19.6 +- 0.7; 4.4
10	185	1.3	20.6 +- 0.6; 3.1	17.3 +- 0.7; 4.2
11	243	5.1	22.8 +- 0.7; 3.4	19.4 +- 0.7; 4.4
12	252	4.6	21.8 +- 0.7; 3.3	18.4 +- 0.7; 4.3
13	274	3.4	25.0 +- 0.7; 3.7	21.5 +- 0.8; 4.6
14	286	3.6	23.5 +- 0.7; 3.5	20.0 +- 0.8; 4.5
15	1	3.9	23.8 +- 0.7; 3.6	20.4 +- 0.8; 4.5
16	334	4.1	22.3 +- 0.7; 3.3	18.9 +- 0.7; 4.3
17	312	4.4	23.5 +- 0.7; 3.5	20.1 +- 0.8; 4.5
18	33	5.0	22.7 +- 0.7; 3.4	19.3 +- 0.7; 4.4
19	45	9.9	22.9 +- 0.7; 3.4	19.5 +- 0.7; 4.4
20	65	4.7	24.8 +- 0.7; 3.7	21.4 +- 0.8; 4.6
21	43	3.3	26.7 +- 0.8; 4.0	23.2 +- 0.8; 4.8
22	33	0.9	24.2 +- 0.7; 3.6	20.7 +- 0.8; 4.5
23	57	1.2	20.4 +- 0.6; 3.1	17.0 +- 0.7; 4.1
24	87	1.4	24.1 +- 0.7; 3.6	20.7 +- 0.8; 4.5
25	111	1.4	23.1 +- 0.7; 3.5	19.7 +- 0.7; 4.4
26	137	1.5	23.4 +- 0.7; 3.5	20.0 +- 0.8; 4.5
27	152	1.5	23.1 +- 0.7; 3.5	19.6 +- 0.7; 4.4
28	107	3.6	25.0 +- 0.7; 3.7	21.5 +- 0.8; 4.6
29	99	4.3	24.4 +- 0.7; 3.7	21.0 +- 0.8; 4.6
30	138	3.6	24.1 +- 0.7; 3.6	20.7 +- 0.8; 4.5
31	162	3.4	26.5 +- 0.8; 4.0	23.0 +- 0.8; 4.8
32	176	3.5	25.5 +- 0.8; 3.8	22.0 +- 0.8; 4.7
33	192	3.2	25.7 +- 0.8; 3.8	22.2 +- 0.8; 4.7
34	231	4.4	23.3 +- 0.7; 3.5	19.9 +- 0.8; 4.4
35	134	12.3	24.0 +- 0.7; 3.6	20.6 +- 0.8; 4.5
36	114	13.5	26.8 +- 0.8; 4.0	23.3 +- 0.8; 4.9
37	150	15.6	22.9 +- 0.7; 3.4	19.5 +- 0.7; 4.4

Transit Dose = 3.0 +- 0.3; 2.9

SUSQUEHANNA
For the period 930915-940127

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	20.4 +- 0.1	2
11.26 - 33.75 NNE	19.8 +- 0.8	3
33.76 - 56.25 NE	21.3 +- 2.6	2
56.26 - 78.75 ENE	19.2 +- 3.1	2
78.76 - 101.25 E	20.8 +- 0.2	2
101.26 - 123.75 ESE	20.6 +- 1.3	2
123.76 - 146.25 SE	20.3 +- 0.5	2
146.26 - 168.75 SSE	21.3 +- 2.4	2
168.76 - 191.25 S	19.7 +- 3.4	2
191.26 - 213.75 SSW	20.9 +- 1.8	2
213.76 - 236.25 SW	21.1 +- 1.7	2
236.26 - 258.75 WSW	18.6 +- 0.7	3
258.76 - 281.25 W	20.3 +- 1.7	2
281.26 - 303.75 WNW	20.3 +- 0.4	2
303.76 - 326.25 NW	19.0 +- 1.6	2
326.26 - 348.75 NNW	18.5 +- 0.6	2

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	19.4 +- 1.4	16
2 - 5	20.8 +- 1.4	16
> 5	19.4 +- 0.1	2
Upwind Control	21.1 +- 2.0	3

SUSQUEHANNA
TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	19	US11 AND MINGLE INN RD.
2	358	MINGLE INN ROAD
3	332	WALTON POWER LINE
4	315	MINGLE INN ROAD TRAILER PARK
5	287	STONE CHURCH RD.
6	270	WALKER RUN CREEK
7	239	MARKET ST. & DENN'S ROAD
8	217	SALEM TOWNSHIP FIRE CO.
9	201	U.S.11 AND RIVER ROAD
10	185	SOUTH TRANSMISSION LINE
11	243	BERWICK SUBSTATION
12	252	BERWICK HOSPITAL
13	274	MOORE'S HILL & VARNER'S HOL. RDS.
14	286	MOORE'S HILL & MINGLE INN RDS.
15	1	WEST END COAL COMPANY
16	334	SHICKSHINNY VALLEY RD.
17	312	SHICKSHINNY VALLEY CHURCH
18	33	THE HIDEOUT
19	45	SHEATOWN
20	65	RUCKLES HILL ROAD
21	43	POND HILL-LILY LAKE FIRE CO.
22	33	ENERGY INFORMATION CENTER
23	57	STONE CRUSHER TRAIL
24	87	PA239 & RUCKLES HILL ROAD
25	111	PA239 N. OF WAPWALLOOPEN
26	137	HELLER'S ORCHARD STORE
27	152	WAPWALLOOPEN POST OFFICE
28	107	ST. PETER'S REFORMED CHURCH
29	99	ST. MARY'S RD. & KINGSBERRY DR.
30	138	STATE ROAD
31	162	NESCOPECK TWP. MAINT. BLDG
32	176	NESCOPECK TWP. FIRE COMPANY
33	192	MT. ZION CHURCH
34	231	MAPLE STREET
35	134	HAZLETON
36	114	FREELAND
37	150	MCADOO

NRC TLD DOSES FOR SUSQUEHANNA AREA

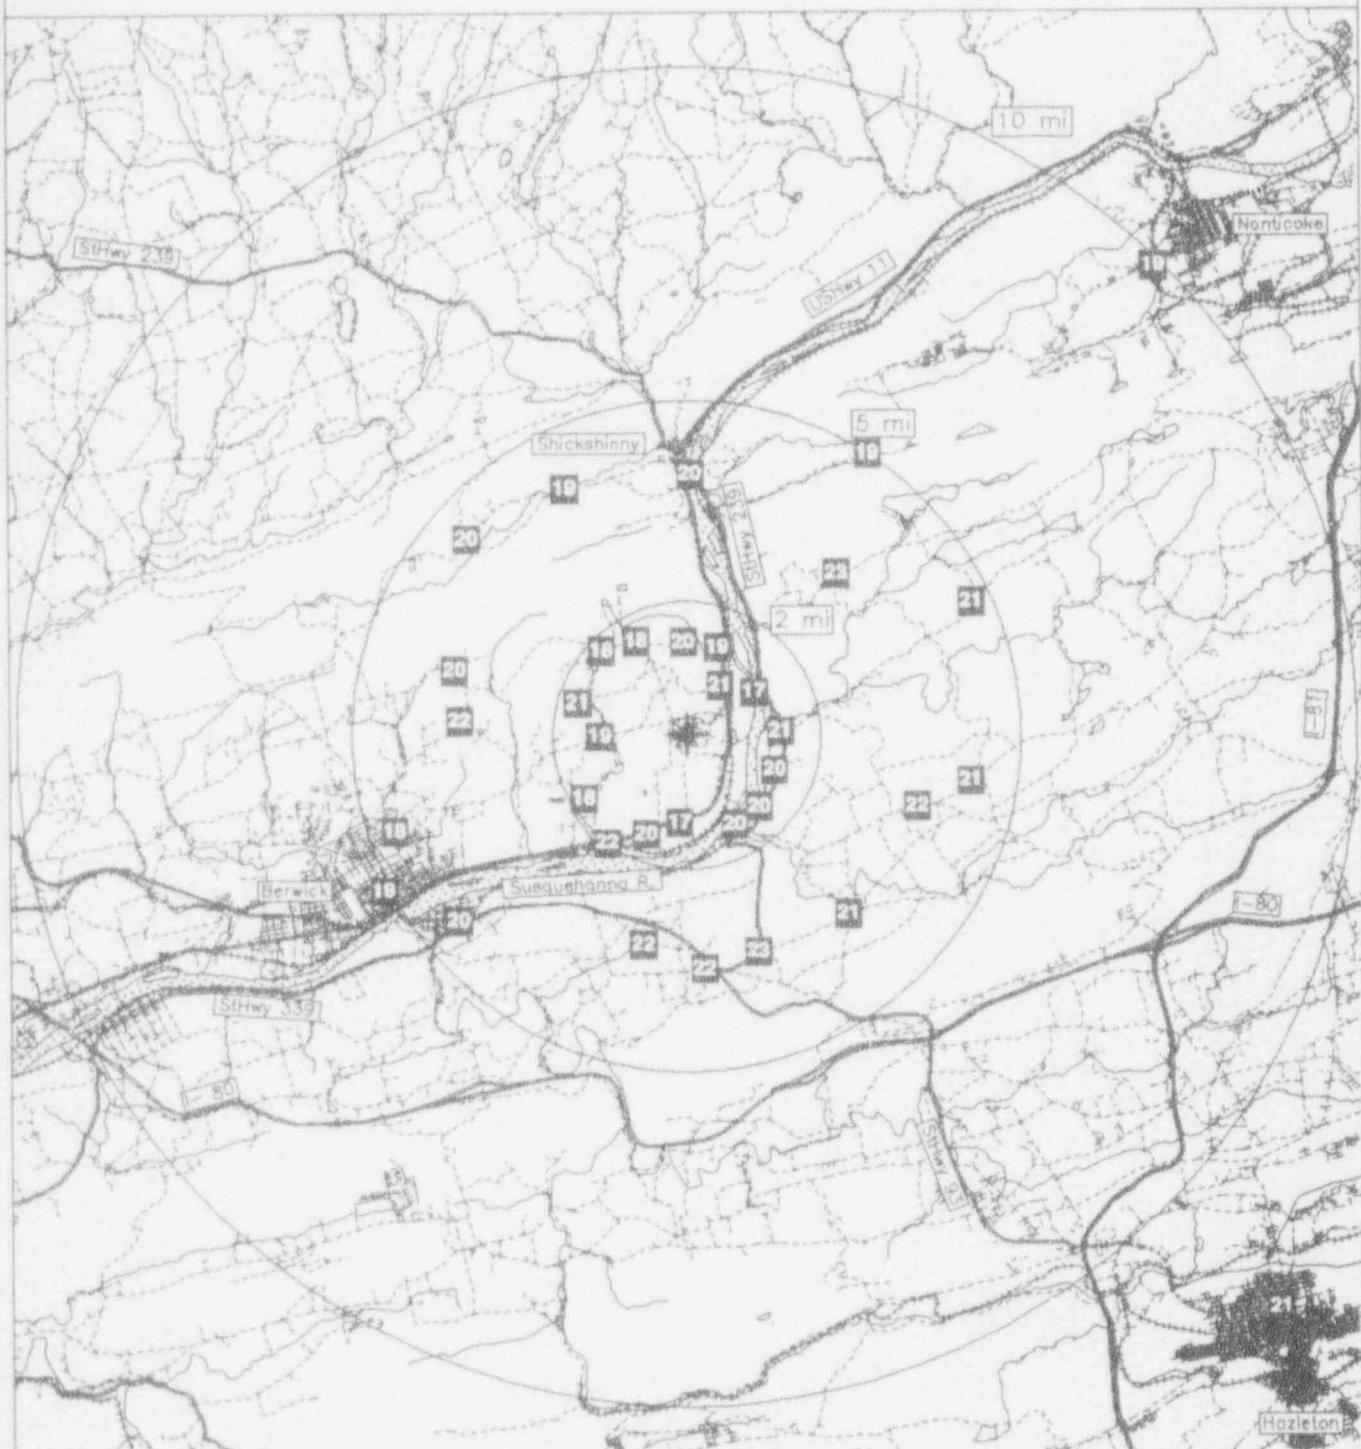

Miles

A horizontal scale bar with three tick marks. The first tick mark is labeled '0', the second is labeled '2', and the third is labeled '4'.

Legend

- Water
- Highways

- Railroads
- Roads



THREE MILE ISLAND

TLD Direct Radiation Environmental Monitoring
 For the period 930915-940127 135 Days
 Field Time: 93 Days

NRC Sta	Location	Gross Exposure (mR)	Net Exposure Rate (mR/Std. Qtr.)	Hist. Range Net Exp Rate +-1 Std Dev
	Azimuth/Dist (Deg)/(Mi)	+-Rdm; Tot.	+-Rdm; Tot.	
1	95	5.9	21.2 +- 0.6; 3.2	15.7 +- 2.4
2	102	3.9	23.1 +- 0.7; 3.5	17.9 +- 2.4
3	110	2.7	17.0 +- 0.5; 2.5	13.7 +- 2.9
4	162	1.8	19.6 +- 0.6; 2.9	15.1 +- 2.4
5	161	2.3	19.9 +- 0.6; 3.0	15.2 +- 2.2
6	152	1.1	19.9 +- 0.6; 3.0	15.8 +- 2.3
7	123	0.5	18.0 +- 0.5; 2.7	14.0 +- 2.2
8	87	0.4	21.9 +- 0.7; 3.3	15.6 +- 2.5
9	61	0.5	18.4 +- 0.6; 2.8	14.6 +- 2.0
10	1	1.7	20.4 +- 0.6; 3.1	14.6 +- 2.6
11	27	0.8	19.5 +- 0.6; 2.9	14.7 +- 2.2
12	48	1.0	20.0 +- 0.6; 3.0	15.0 +- 2.5
13	19	2.0	19.8 +- 0.6; 3.0	15.3 +- 2.3
14	358	2.4	18.7 +- 0.6; 2.8	13.8 +- 2.6
15	132	9.0	22.2 +- 0.7; 3.3	17.6 +- 2.6
16	0	3.0	17.4 +- 0.5; 2.6	13.9 +- 2.5
18	347	3.5	23.0 +- 0.7; 3.5	17.7 +- 2.8
19	343	3.1	20.9 +- 0.6; 3.1	16.1 +- 2.2
20	318	5.0	20.5 +- 0.6; 3.1	14.8 +- 2.2
21	348	2.7	16.3 +- 0.5; 2.4	12.0 +- 2.2
22	17	3.1	20.8 +- 0.6; 3.1	15.4 +- 2.4
23	64	3.7	16.9 +- 0.5; 2.5	12.5 +- 2.2
24	44	3.6	21.1 +- 0.6; 3.2	16.3 +- 2.5
25	327	0.4	Missing Dosimeter	No Net Data
27	7	7.1	25.0 +- 0.7; 3.7	19.8 +- 2.5
29	293	0.4	Missing Dosimeter	No Net Data
30	314	1.1	Missing Dosimeter	No Net Data
31	303	8.6	18.2 +- 0.5; 2.7	13.4 +- 2.1
32	297	7.6	21.6 +- 0.6; 3.2	16.7 +- 2.2
33	302	5.8	17.2 +- 0.5; 2.6	13.2 +- 2.3
34	296	2.3	20.8 +- 0.6; 3.1	15.9 +- 2.3
35	308	1.8	21.2 +- 0.6; 3.2	16.0 +- 2.0
36	265	1.2	17.5 +- 0.5; 2.6	12.4 +- 2.4
37	256	1.4	18.1 +- 0.5; 2.7	13.2 +- 2.2
38	225	1.9	20.0 +- 0.6; 3.0	16.4 +- 2.1
39	204	2.0	17.4 +- 0.5; 2.6	12.7 +- 2.2
40	202	2.5	18.6 +- 0.6; 2.8	14.2 +- 2.2
41	184	12.6	20.5 +- 0.6; 3.1	16.0 +- 2.3
42	259	7.4	20.6 +- 0.6; 3.1	15.5 +- 2.2
43	268	6.2	19.7 +- 0.6; 3.0	16.7 +- 2.7
44	249	4.3	19.3 +- 0.6; 2.9	14.5 +- 2.2
45	221	0.5	Missing Dosimeter	No Net Data
46	171	3.0	20.5 +- 0.6; 3.1	14.7 +- 2.7
47	177	5.7	18.6 +- 0.6; 2.8	14.9 +- 2.4
48	181	9.1	25.5 +- 0.8; 3.8	21.6 +- 2.9
49	199	1.0	Missing Dosimeter	No Net Data
50	145	4.9	22.7 +- 0.7; 3.4	14.7 +- 2.3
				16.7 +- 2.8

Transit Dose = 3.0 +- 0.3; 2.9

THREE MILE ISLAND
For the period 930915-940127

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	16.8 +- 3.2	4
11.26 - 33.75 NNE	16.5 +- 0.7	3
33.76 - 56.25 NE	16.9 +- 0.7	2
56.26 - 78.75 ENE	14.2 +- 1.0	2
78.76 - 101.25 E	17.9 +- 0.5	2
101.26 - 123.75 ESE	15.8 +- 3.2	3
123.76 - 146.25 SE	18.8 +- 0.4	2
146.26 - 168.75 SSE	16.2 +- 0.2	3
168.76 - 191.25 S	17.7 +- 2.9	4
191.26 - 213.75 SSW	14.5 +- 0.8	2
213.76 - 236.25 SW	16.4 +- 0.0	1
236.26 - 258.75 WSW	15.7 +- 0.0	1
258.76 - 281.25 W	16.6 +- 0.6	2
281.26 - 303.75 WNW	15.9 +- 2.0	4
303.76 - 326.25 NW	16.9 +- 0.0	1
326.26 - 348.75 NNW	16.5 +- 3.3	3

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	16.0 +- 1.2	11
2 - 5	16.3 +- 2.1	17
> 5	17.3 +- 2.5	11
Upwind Control	15.4 +- 1.9	3

THREE MILE ISLAND
TLD Direct Radiation Environmental Monitoring

NRC Station	Location	Azimuth / Distance	Description
		Degree / Mile	
1		95	TURNPIKE ROAD AND PA 241
2		102	TURNPIKE ROAD AND BOSSLER ROAD
3		110	TURNPIKE ROAD AND HILLSDALE ROAD
4		162	FALMOUTH
5		161	COLLINS SUBSTATION
6		152	RED HILL FARM MARKET
7		123	500 KEV SUBSTATION
8		87	PA 441 & MEADOW LANE
9		61	PA 441 AND LAUREL ROAD
10		1	980 LINE
11		7	GEYER'S CHURCH ROAD AND PA 441
12		48	GINGRICH ROAD
13		19	HILLSDALE DRIVE
14		358	GRUBB STREET
15		132	CARGILL TANKS
16		0	RACE AND CONEWAGO STREETS
18		347	GRANDVIEW ELEMENTARY
19		343	PENN STATE HBG ENTRANCE
20		318	HIGHSPIRE FIRE COMPANY
21		348	MANSBERGER ELEMENTARY
22		17	STARLITE MOTEL
23		64	PA 230 AND DEODATE ROAD
24		44	LONDONBERRY ELEMENTARY
25		327	KOHR ISLAND
27		7	VINE STREET AND US 322
29		293	SHELLEY ISLAND
30		314	HILL ISLAND
31		303	MEADOWBROOK ROAD
32		297	OLD YORK ROAD & THE PA TURNPIKE
33		302	MARSH RUN ROAD
34		296	PA 262 AND PA 392
35		308	STILLHOUSE ROAD
36		265	GOLDSBORO BOAT RAMP
37		256	GOLDSBORO CEMENT BRIDGE
38		225	PA 262 AND RIVER ROAD
39		204	PA 262 NEAR THE R.R. TRACKS
40		202	PA 295 AND PA 382
41		184	YORK SUBSTATION
42		259	PA 382 AND PA 177
43		268	PA 177 AND PA 392
44		249	ROXBERRY AND LEWISBERRY ROADS
45		221	NORTH END OF BEECH ISLAND
46		171	LANDVALE ST. AND PA. AVE.
47		177	GEORGE ST. & MEETING HOUSE RD.
48		181	PA 181 AND PA 238
49		199	SOUTH END OF BEECH ISLAND
50		145	BAINBRIDGE ELEMENTARY

NRC TLD DOSES FOR THREE MILE ISLAND AREA

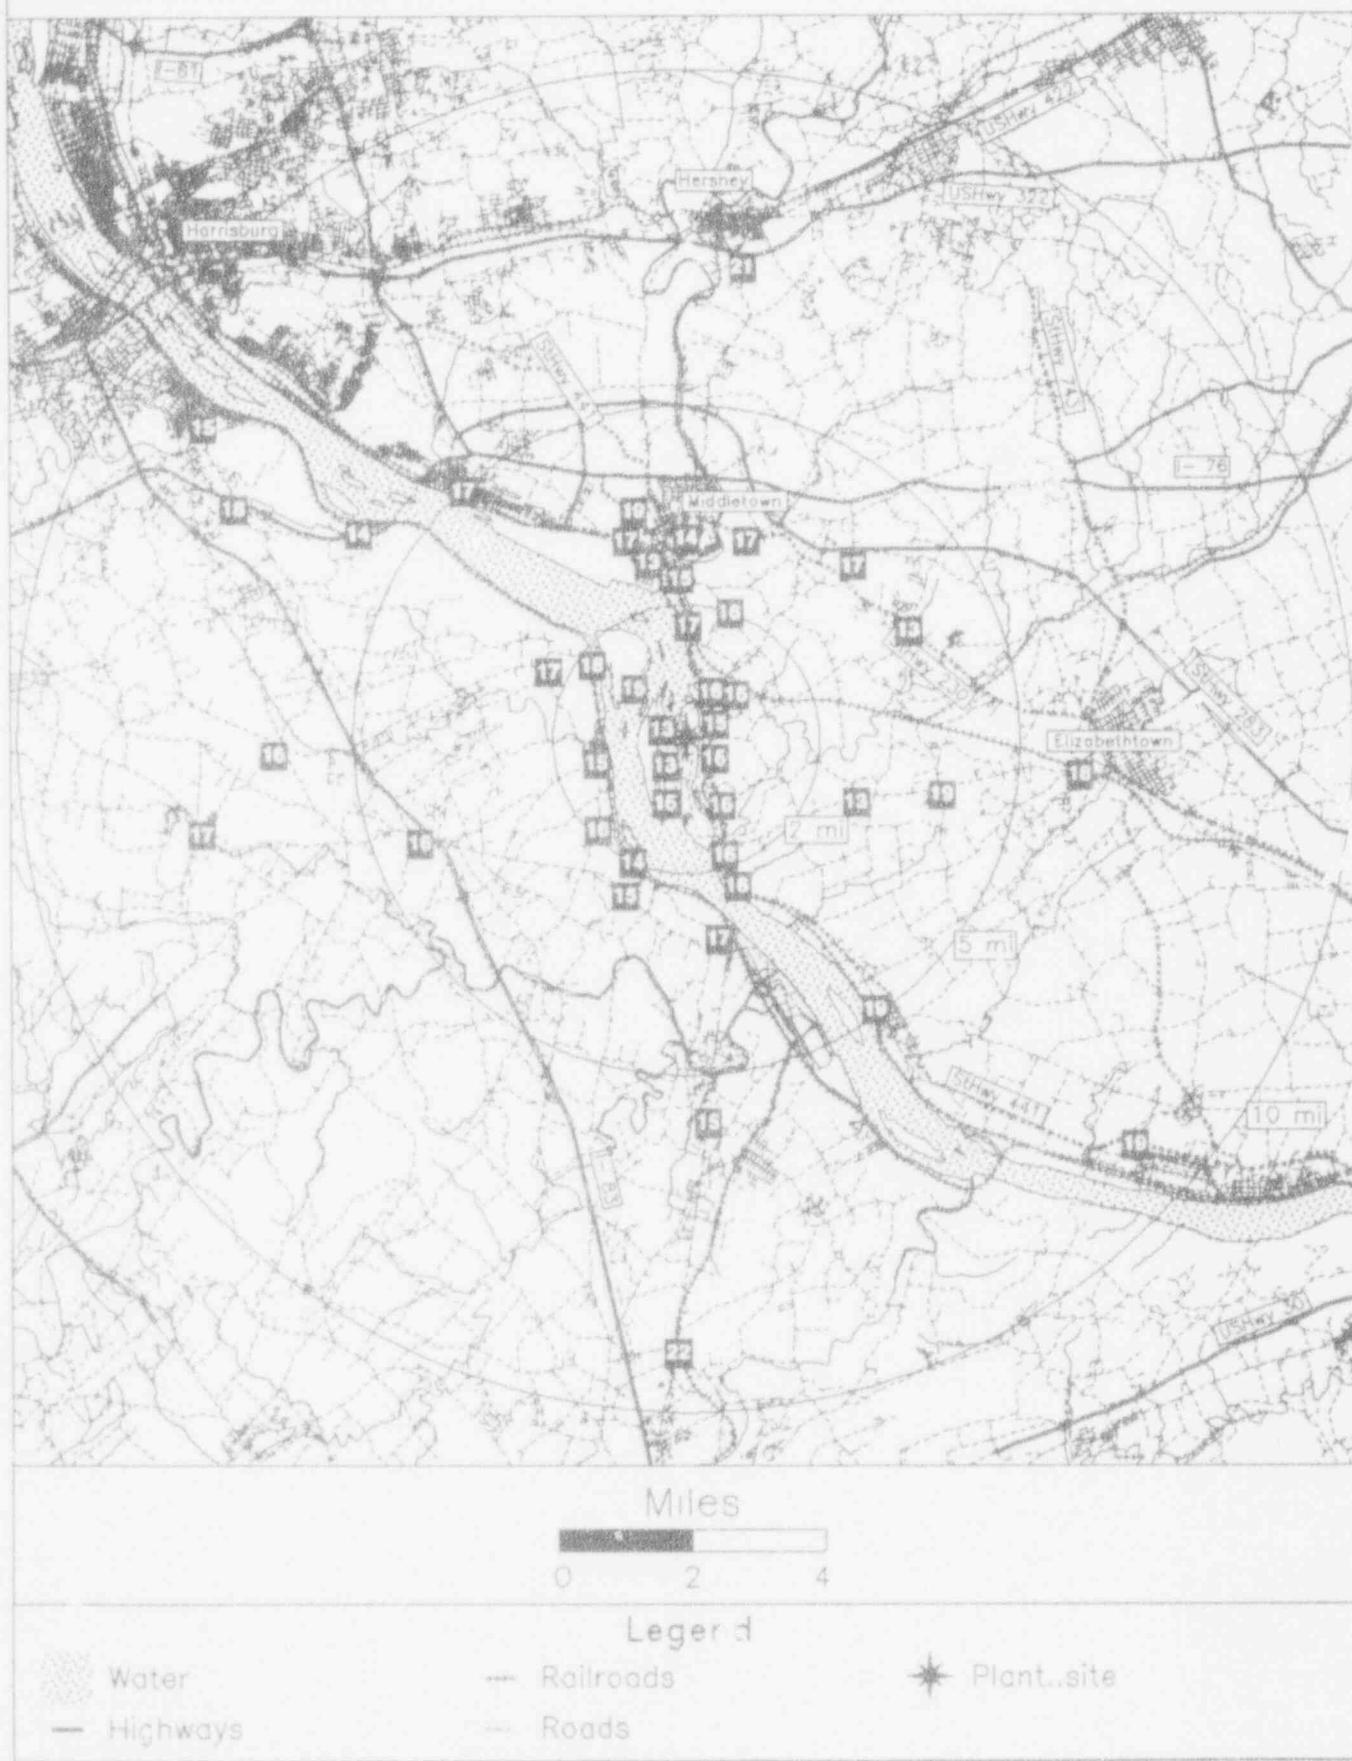

TROJAN

TLD Direct Radiation Environmental Monitoring
 For the period 930913-940127 137 Days
 Field Time: 88 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	340	0.6	18.7 +- 0.6; 2.8	13.5 +- 0.7; 4.2
2	334	1.5	20.0 +- 0.6; 3.0	14.8 +- 0.7; 4.4
3	340	1.7	17.6 +- 0.5; 2.6	12.4 +- 0.7; 4.1
4	328	3.9	18.2 +- 0.5; 2.7	12.9 +- 0.7; 4.2
5	308	4.6	20.5 +- 0.6; 3.1	15.3 +- 0.7; 4.4
6	312	4.5	Missing Dosimeter	No Net Data
7	267	4.6	20.6 +- 0.6; 3.1	15.4 +- 0.7; 4.4
8	274	3.8	20.7 +- 0.6; 3.1	15.5 +- 0.7; 4.4
9	279	1.7	20.8 +- 0.6; 3.1	15.6 +- 0.7; 4.4
10	263	2.0	20.6 +- 0.6; 3.1	15.5 +- 0.7; 4.4
11	245	1.6	21.4 +- 0.6; 3.2	16.2 +- 0.8; 4.5
12	223	1.2	21.9 +- 0.7; 3.3	16.7 +- 0.8; 4.6
13	196	1.1	21.2 +- 0.6; 3.2	16.0 +- 0.8; 4.5
14	180	1.2	19.9 +- 0.6; 3.0	14.7 +- 0.7; 4.3
15	165	1.7	17.2 +- 0.5; 2.6	12.0 +- 0.7; 4.1
16	212	3.9	20.5 +- 0.6; 3.1	15.3 +- 0.7; 4.4
17	230	3.5	19.7 +- 0.6; 2.9	14.4 +- 0.7; 4.3
18	162	9.3	21.6 +- 0.6; 3.2	16.4 +- 0.8; 4.5
19	172	5.0	19.9 +- 0.6; 3.0	14.7 +- 0.7; 4.3
20	334	5.8	18.2 +- 0.5; 2.7	13.0 +- 0.7; 4.2
21	345	5.5	19.0 +- 0.6; 2.9	13.8 +- 0.7; 4.2
22	356	5.5	18.1 +- 0.5; 2.7	12.9 +- 0.7; 4.2
23	8	3.9	17.7 +- 0.5; 2.7	12.5 +- 0.7; 4.1
24	15	3.7	18.6 +- 0.6; 2.8	13.4 +- 0.7; 4.2
25	27	1.9	17.4 +- 0.5; 2.6	12.1 +- 0.7; 4.1
26	37	2.1	20.5 +- 0.6; 3.1	15.3 +- 0.7; 4.4
27	60	2.9	20.7 +- 0.6; 3.1	15.5 +- 0.7; 4.4
28	55	4.5	18.7 +- 0.6; 2.8	13.5 +- 0.7; 4.2
29	69	1.6	17.4 +- 0.5; 2.6	12.1 +- 0.7; 4.1
30	83	3.9	17.9 +- 0.5; 2.7	12.6 +- 0.7; 4.1
31	93	2.7	20.3 +- 0.6; 3.1	15.1 +- 0.7; 4.4
32	119	2.2	20.3 +- 0.6; 3.0	15.1 +- 0.7; 4.4
33	106	5.3	18.2 +- 0.5; 2.7	13.0 +- 0.7; 4.2
34	134	2.5	18.3 +- 0.5; 2.7	13.1 +- 0.7; 4.2
35	145	4.7	18.8 +- 0.6; 2.8	13.5 +- 0.7; 4.2
36	270	17.0	19.1 +- 0.6; 2.9	13.8 +- 0.7; 4.3
37	270	17.0	19.2 +- 0.6; 2.9	14.0 +- 0.7; 4.3
38	270	17.0	21.2 +- 0.6; 3.2	16.0 +- 0.8; 4.5

Transit Dose = 3.5 +- 0.4; 3.0

TROJAN

For the period 930913-940127

TLD Direct Radiation Environmental Monitoring

Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	12.7 +- 0.3	2
11.26 - 33.75 NNE	12.8 +- 0.9	2
33.76 - 56.25 NE	14.4 +- 1.3	2
56.26 - 78.75 ENE	13.8 +- 2.4	2
78.76 - 101.25 E	13.9 +- 1.8	2
101.26 - 123.75 ESE	14.0 +- 1.5	2
123.76 - 146.25 SE	13.3 +- 0.3	2
146.26 - 168.75 SSE	14.2 +- 3.1	2
168.76 - 191.25 S	14.7 +- 0.0	2
191.26 - 213.75 SSW	15.6 +- 0.5	2
213.76 - 236.25 SW	15.6 +- 1.6	2
236.26 - 258.75 WSW	16.2 +- 0.0	1
258.76 - 281.25 W	15.5 +- 0.1	4
281.26 - 303.75 WNW	No Data +- No Data	0
303.76 - 326.25 NW	15.3 +- 0.0	1
326.26 - 348.75 NNW	13.4 +- 0.8	6


Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	14.3 +- 1.8	12
2 - 5	14.3 +- 1.1	17
> 5	13.8 +- 1.5	5
Upwind Control	14.6 +- 1.2	3

TROJAN

TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	340	SCHOOL ST. (END)
2	334	THOMPSON RESIDENCE
3	340	JACK FALLS RD.
4	328	HWY. 30 NEAR RAINIER
5	308	FERNHILL RD.
6	312	FERNCREST DRIVE
7	267	ZIMMER RD.
8	274	HUTCHISON RD.
9	279	NEER CITY RD.
10	263	BROWNLEE RD.
11	245	LIRE RESIDENCE
12	223	NEER CITY RD. & P-45
13	196	CEMETERY RD.
14	180	NEER'S RESIDENCE
15	165	NICOLAI RD.
16	212	FAIRVIEW RD.
17	230	WALKER RD.
18	162	REICHHOLD CHEMICALS
19	172	TIDE CR. RD.
20	334	LONGVIEW (WASHINGTON)
21	345	TENNANT RD.
22	356	TALLEY RD.
23	8	SIGNS FOR THE LORD
24	15	ROSE VALLEY RD.
25	27	CARROLLS BLUFF
26	37	MT. PLEASANT RD.
27	60	MT. PLEASANT CEMETERY
28	55	NEAR KOOL RD.
29	69	OLD 99 SOUTH
30	83	SALMON FISH HATCHERY
31	93	SPENCER CR. RD.
32	119	OLD 99 SOUTH (N. OF ELM)
33	106	CHINA GARDEN RD.
34	134	SPENCER CR. RD
35	145	OLD 99 SOUTH NEAR KILKELLY RD.
36	270	HWY. 47
37	270	HWY. 47
38	270	HWY. 47

NRC TLD DOSES FOR TROJAN AREA

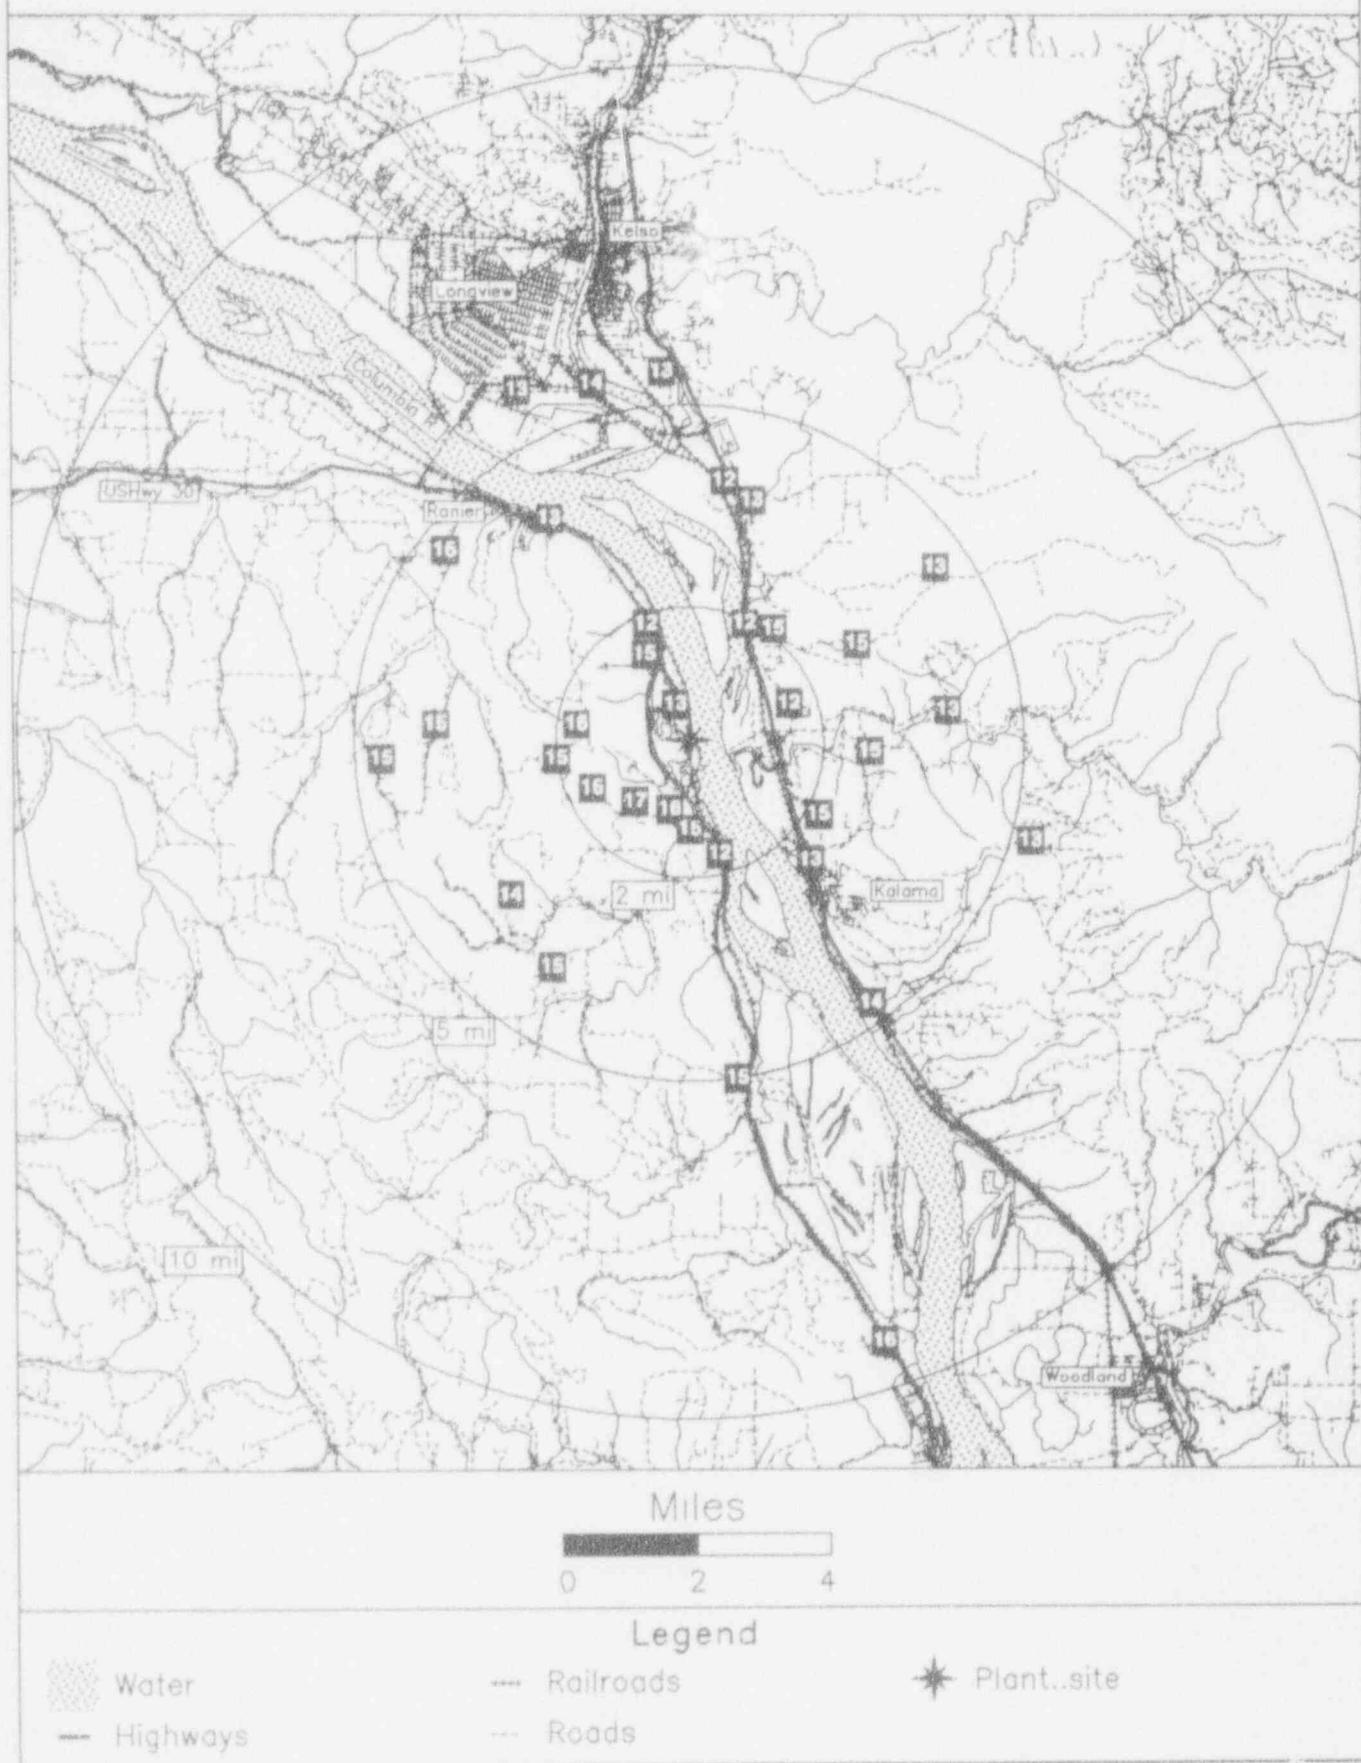

TURKEY POINT
 TLD Direct Radiation Environmental Monitoring
 For the period 930914-940203 143 Days
 Field Time: 98 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	310	1.3	17.0 +- 0.5; 2.5	12.0 +- 0.6; 3.7
2	292	2.4	15.9 +- 0.5; 2.4	11.0 +- 0.5; 3.6
3	340	1.9	17.5 +- 0.5; 2.6	12.5 +- 0.6; 3.8
4	354	2.0	17.2 +- 0.5; 2.6	12.1 +- 0.6; 3.7
5	314	3.8	17.1 +- 0.5; 2.6	12.0 +- 0.6; 3.7
6	331	4.2	Missing Dosimeter	No Net Data
7	291	5.4	16.7 +- 0.5; 2.5	11.7 +- 0.6; 3.7
8	263	5.1	15.5 +- 0.5; 2.3	10.6 +- 0.5; 3.6
9	242	5.7	17.4 +- 0.5; 2.6	12.4 +- 0.6; 3.3
10	234	6.2	17.0 +- 0.5; 2.6	12.0 +- 0.6; 3.7
11	220	6.2	16.4 +- 0.5; 2.5	11.4 +- 0.6; 3.7
12	213	6.9	17.0 +- 0.5; 2.6	12.0 +- 0.6; 3.7
13	199	10.0	16.5 +- 0.5; 2.5	11.5 +- 0.6; 3.7
14	90	10.0	15.6 +- 0.5; 2.3	10.7 +- 0.5; 3.6
15	180	10.0	18.4 +- 0.6; 2.8	13.2 +- 0.6; 3.9
16	171	10.0	19.0 +- 0.6; 2.9	13.8 +- 0.6; 3.9
17	165	9.0	17.9 +- 0.5; 2.7	12.8 +- 0.6; 3.8
18	203	16.0	18.6 +- 0.6; 2.8	13.4 +- 0.6; 3.9
19	203	16.0	17.8 +- 0.5; 2.7	12.7 +- 0.6; 3.8
20	203	16.0	18.7 +- 0.6; 2.8	13.5 +- 0.6; 3.9
21	268	8.7	14.4 +- 0.4; 2.2	9.6 +- 0.5; 3.5
22	256	8.0	Missing Dosimeter	No Net Data
23	275	9.0	15.7 +- 0.5; 2.4	10.8 +- 0.5; 3.6
24	285	9.0	19.1 +- 0.6; 2.9	13.9 +- 0.6; 3.9
25	293	8.7	19.0 +- 0.6; 2.8	13.8 +- 0.6; 3.9
26	301	8.4	18.4 +- 0.6; 2.8	13.2 +- 0.6; 3.9
27	311	8.3	17.2 +- 0.5; 2.6	12.2 +- 0.6; 3.8
28	327	8.2	18.9 +- 0.6; 2.8	13.7 +- 0.6; 3.9
29	339	9.3	18.3 +- 0.5; 2.7	13.1 +- 0.6; 3.8
30	350	8.7	16.6 +- 0.5; 2.5	11.6 +- 0.6; 3.7
31	359	9.9	18.0 +- 0.5; 2.7	12.9 +- 0.6; 3.8
32	2	18.0	18.8 +- 0.6; 2.8	13.7 +- 0.6; 3.9
33	2	22.0	18.5 +- 0.6; 2.8	13.3 +- 0.6; 3.9
34	18	24.0	16.9 +- 0.5; 2.5	11.8 +- 0.6; 3.7
35	28	22.0	16.0 +- 0.5; 2.4	11.1 +- 0.6; 3.6
36	15	0.3	14.9 +- 0.4; 2.2	10.1 +- 0.5; 3.6
37	228	0.5	18.6 +- 0.6; 2.8	13.5 +- 0.6; 3.9

Transit Dose = 4.0 +- 0.4; 3.2

TURKEY POINT

For the period 930914-940203

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	12.7 +- 0.8	5
11.26 - 33.75 NNE	11.0 +- 0.9	3
33.76 - 56.25 NE	No Data +- No Data	0
56.26 - 78.75 ENE	No Data +- No Data	0
78.76 - 101.25 E	10.7 +- 0.0	1
101.26 - 123.75 ESE	No Data +- No Data	0
123.76 - 146.25 SE	No Data +- No Data	0
146.26 - 168.75 SSE	12.8 +- 0.0	1
168.76 - 191.25 S	13.5 +- 0.4	2
191.26 - 213.75 SSW	11.8 +- 0.3	2
213.76 - 236.25 SW	12.3 +- 1.1	3
236.26 - 258.75 WSW	12.4 +- 0.0	1
258.76 - 281.25 W	10.3 +- 0.7	3
281.26 - 303.75 WNW	12.7 +- 1.3	5
303.76 - 326.25 NW	12.1 +- 0.1	3
326.26 - 348.75 NNW	13.1 +- 0.6	3

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	12.0 +- 1.2	5
2 - 5	11.5 +- 0.8	2
> 5	12.3 +- 1.2	25
Upwind Control	13.2 +- 0.5	3

TURKEY POINT
TLD Direct Radiation Environmental Monitoring

NRC Station	Location	Azimuth / Distance Degree / Mile	Description
1	310	1.3	SITE RD. & PALM DR.
2	292	2.4	PALM DR (1.2 MILES W. OF SITE RD.)
3	340	1.9	HOMESTEAD BAYFRONT PARK
4	354	2.0	HOMESTEAD BAYFRONT PARK (BOAT LAUNCH)
5	314	3.8	WAREHAUSER SHRIMP FARM
6	331	4.2	S. ALLAPATTAH DR.
7	291	5.4	N. CANAL DR. & TALLAHASSEE RD.
8	263	5.1	S. OF CANAL DR. ON TALLAHASSEE RD.
9	242	5.7	TALLAHASSEE RD. (4.5 MILES S. OF CANAL RD.)
10	234	6.2	TALLAHASSEE RD. (5.6 MILES S. OF CANAL RD.)
11	220	6.2	OFF TALLAHASSEE RD ON DIRT RD W/ STEEL BARR.
12	213	6.9	OFF TALLAHASSEE RD. ON DIRT RD. AT LEVEE
13	199	10.0	CARD SOUND RD.
14	90	10.0	CARD SOUND RD. AT BARNES PT.
15	180	10.0	CARD SOUND RD. AT STEAMBOAT CR.
16	171	10.0	CARD SOUND RD. (RT. 905)
17	165	9.0	KEY LARGO CLUB GATEHOUSE
18	203	16.0	HWY. 1 (6 MILES N. OF RT. 905)
19	203	16.0	HWY. 1 (6.4 MILES N. OF RT. 905)
20	203	16.0	HWY. 1 (6.4 MILES N. OF RT. 905)
21	268	8.7	NAVY SECURITY COMPLEX
22	256	8.0	CARD SOUND RD. (2.2 MILES SE OF RT. 1)
23	275	9.0	HWY. 1 (1 MILE N. OF CARD SOUND RD.)
24	285	9.0	HWY. 1 & MOWRY ST.
25	293	8.7	HWY. 1 & KINGS HWY.
26	301	8.4	HWY. 1 & BISCAYNE BLVD.
27	311	8.3	HWY. 1 & SW 145TH ST.
28	327	8.2	COCONUT PALM DR.
29	339	9.3	HWY. 1 & SW 220TH ST.
30	350	8.7	OLD CUTLER RD. & SW 223RD ST.
31	359	9.9	FRANJO RD.
32	2	18.0	HWY. 1 & SW 104TH ST.
33	2	22.0	HWY. 1 & GRANADA RD.
34	18	24.0	NATOMA SUBSTATION
35	28	22.0	CRANDON BLVD. & EASTWOOD DR.
36	15	0.3	TURKEY PT. BEACH
37	228	0.5	TURKEY PT. BOY SCOUT CAMP

NRC TLD DOSES FOR TURKEY POINT AREA

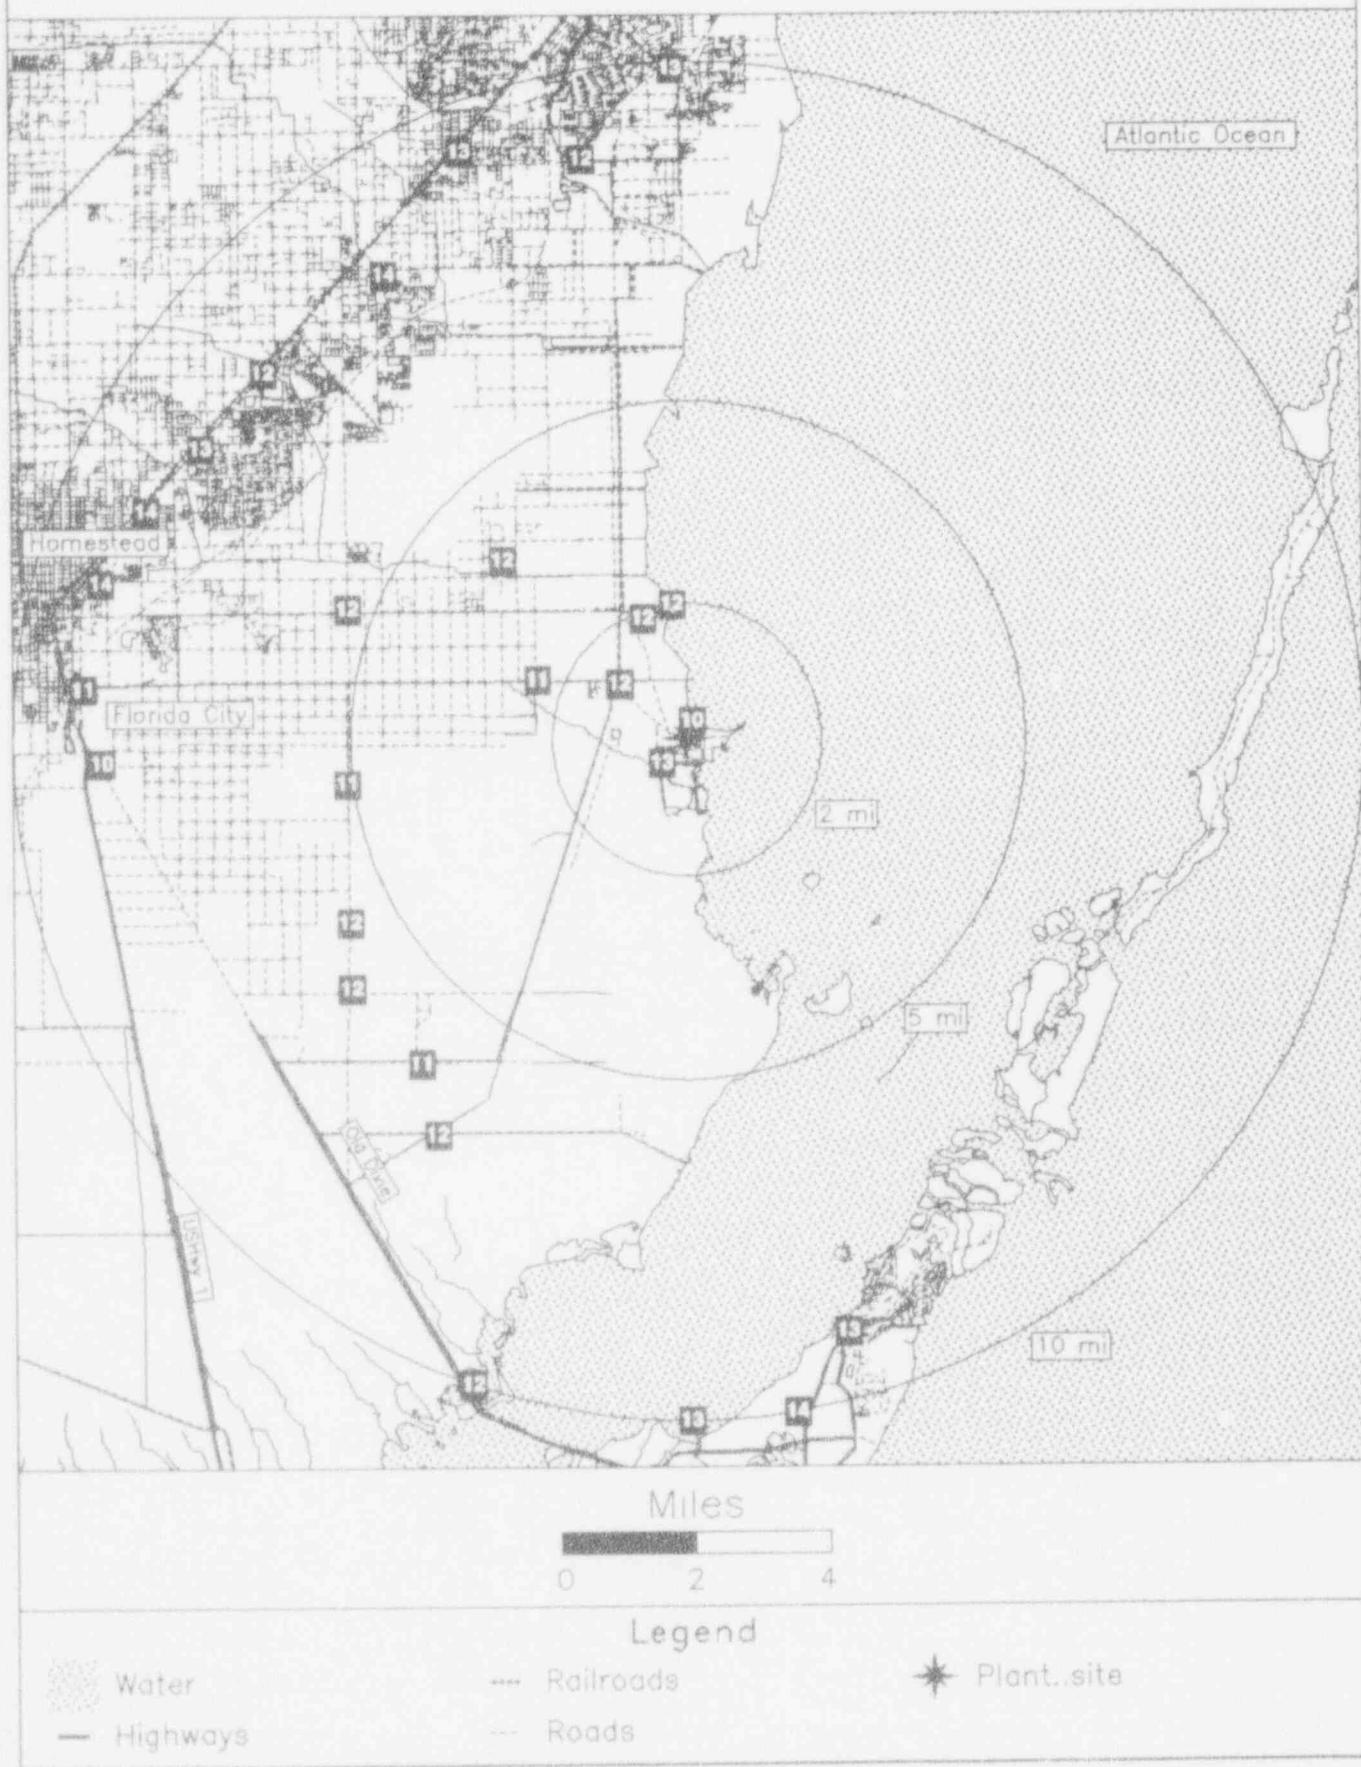

VERMONT YANKEE
 TLD Direct Radiation Environmental Monitoring
 For the period 930915-940208 147 Days
 Field Time: 84 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) --Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) --Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	142	1.0	23.2 +- 0.7; 3.5	18.0 +- 0.9; 4.9
2	158	1.0	22.4 +- 0.7; 3.4	17.1 +- 0.8; 4.8
3	184	1.3	21.2 +- 0.6; 3.2	15.8 +- 0.8; 4.7
4	201	1.4	22.9 +- 0.7; 3.4	17.6 +- 0.9; 4.9
5	220	1.6	23.7 +- 0.7; 3.6	18.5 +- 0.9; 5.0
6	157	3.4	26.7 +- 0.8; 4.0	21.7 +- 1.0; 5.4
7	189	4.9	22.9 +- 0.7; 3.4	17.6 +- 0.9; 4.9
8	201	13.0	22.7 +- 0.7; 3.4	17.4 +- 0.8; 4.9
9	208	5.8	22.6 +- 0.7; 3.4	17.3 +- 0.8; 4.8
10	232	3.7	24.8 +- 0.7; 3.7	19.7 +- 0.9; 5.1
11	277	2.9	24.4 +- 0.7; 3.7	19.2 +- 0.9; 5.1
12	292	1.4	23.6 +- 0.7; 3.5	18.3 +- 0.9; 5.0
13	314	1.4	22.5 +- 0.7; 3.4	17.2 +- 0.8; 4.8
14	310	4.2	22.2 +- 0.7; 3.3	16.9 +- 0.8; 4.8
15	299	4.3	22.1 +- 0.7; 3.3	16.8 +- 0.8; 4.8
16	270	4.5	19.7 +- 0.6; 3.0	14.2 +- 0.8; 4.5
17	331	5.0	22.6 +- 0.7; 3.4	17.3 +- 0.8; 4.9
18	290	19.0	23.7 +- 0.7; 3.6	18.5 +- 0.9; 5.0
19	290	19.0	22.2 +- 0.7; 3.3	16.9 +- 0.8; 4.8
20	290	19.0	23.8 +- 0.7; 3.6	18.5 +- 0.9; 5.0
21	359	3.2	22.5 +- 0.7; 3.4	17.1 +- 0.8; 4.8
23	334	2.2	21.7 +- 0.7; 3.3	16.4 +- 0.8; 4.7
24	4	0.9	22.6 +- 0.7; 3.4	17.3 +- 0.8; 4.9
25	30	1.0	22.5 +- 0.7; 3.4	17.1 +- 0.8; 4.8
26	72	1.5	23.7 +- 0.7; 3.5	18.4 +- 0.9; 5.0
27	44	0.7	22.9 +- 0.7; 3.4	17.6 +- 0.9; 4.9
28	39	2.8	24.2 +- 0.7; 3.6	19.0 +- 0.9; 5.0
29	25	3.8	25.2 +- 0.8; 3.8	20.0 +- 0.9; 5.2
30	72	2.7	24.3 +- 0.7; 3.7	19.2 +- 0.9; 5.1
31	85	2.0	23.1 +- 0.7; 3.5	17.9 +- 0.9; 4.9
32	111	1.8	22.9 +- 0.7; 3.4	17.6 +- 0.9; 4.9
33	134	4.0	21.6 +- 0.6; 3.2	16.2 +- 0.8; 4.7
34	151	6.0	21.5 +- 0.6; 3.2	16.2 +- 0.8; 4.7
35	111	4.3	24.0 +- 0.7; 3.6	18.8 +- 0.9; 5.0
36	92	4.7	25.0 +- 0.7; 3.7	19.9 +- 0.9; 5.1
37	50	15.0	27.4 +- 0.8; 4.1	22.4 +- 1.0; 5.5
39	222	0.3	24.6 +- 0.7; 3.7	19.4 +- 0.9; 5.1
40	250	3.0	22.9 +- 0.7; 3.4	17.6 +- 0.9; 4.9

Transit Dose = 6.5 +- 0.4; 3.0

VERMONT YANKEE
For the period 930915-940208

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	17.2 +- 0.1	2
11.26 - 33.75 NNE	18.6 +- 2.0	2
33.76 - 56.25 NE	22.4 +- 0.0	1
56.26 - 78.75 ENE	19.2 +- 0.0	1
78.76 - 101.25 E	18.9 +- 1.4	2
101.26 - 123.75 ESE	18.2 +- 0.8	2
123.76 - 146.25 SE	17.1 +- 1.2	2
146.26 - 168.75 SSE	18.3 +- 3.0	3
168.76 - 191.25 S	16.7 +- 1.3	2
191.26 - 213.75 SSW	17.4 +- 0.2	3
213.76 - 236.25 SW	19.2 +- 0.6	3
236.26 - 258.75 WSW	17.6 +- 0.0	1
258.76 - 281.25 W	16.7 +- 3.5	2
281.26 - 303.75 WNW	17.8 +- 0.9	5
303.76 - 326.25 NW	17.1 +- 0.2	2
326.26 - 348.75 NNW	16.8 +- 0.7	2

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	17.6 +- 0.9	12
2 - 5	18.0 +- 1.9	16
> 5	18.2 +- 2.1	7
Upwind Control	18.3 +- 0.7	3

VERMONT YANKEE
TLD Direct Radiation Environmental Monitoring

NRC Station	Location	Azimuth / Distance Degree / Mile	Description
1	SMEAD LUMBER CO.	142	1.0
2	STEBBINS RD.	158	1.0
3	RT. 142 & POND RD.	184	1.3
4	WEST RD. & EDGEWOOD PARK RD.	201	1.4
5	FAIRMAN RD.	220	1.6
6	POND RD. & HOUGHTON HILL RD.	157	3.4
7	HUCKLE HILL RD.	189	4.9
8	GREENFIELD	201	13.0
9	RT. 5 & COUCH RD.	208	5.8
10	RT. 5	232	3.7
11	RT. 5	277	2.9
12	TYLER HILL RD.	292	1.4
13	RT. 142	314	1.4
14	RT. 5 & GUILFORD CTR RD.	310	4.2
15	GUILFORD CTR RD.	299	4.3
16	WEATHER HEAD HOLLOW RD. & STONY HILL RD.	270	4.5
17	BRATTLEBORO HIGH SCHOOL	331	5.0
18	WILMINGTON	290	19.0
19	WILMINGTON	290	19.0
20	WILMINGTON	290	19.0
21	MEETINGHOUSE RD.	359	3.2
23	HINSDALE RACEWAY	334	2.2
24	RT. 119	4	0.9
25	RT. 119	30	1.0
26	RT. 119	72	1.5
27	RT. 119 & PROSPECT RD.	44	0.7
28	RT. 63 & OLD CHESTERFIELD RD.	39	2.8
29	RT. 63	25	3.8
30	RT. 119	72	2.7
31	DEPOT ST.	85	2.0
32	RT. 63	111	1.8
33	RT. 63	134	4.0
34	NORTHFIELD	151	6.0
35	RIGHT SIDE RD. OFF ASHUELOT RD.	111	4.3
36	ASHUELOT RD.	92	4.7
37	KEENE	50	15.0
39	GOV. HUNT RD.	222	0.3
40	RT. 5	250	3.0

NRC TLD DOSES FOR VERMONT YANKEE AREA

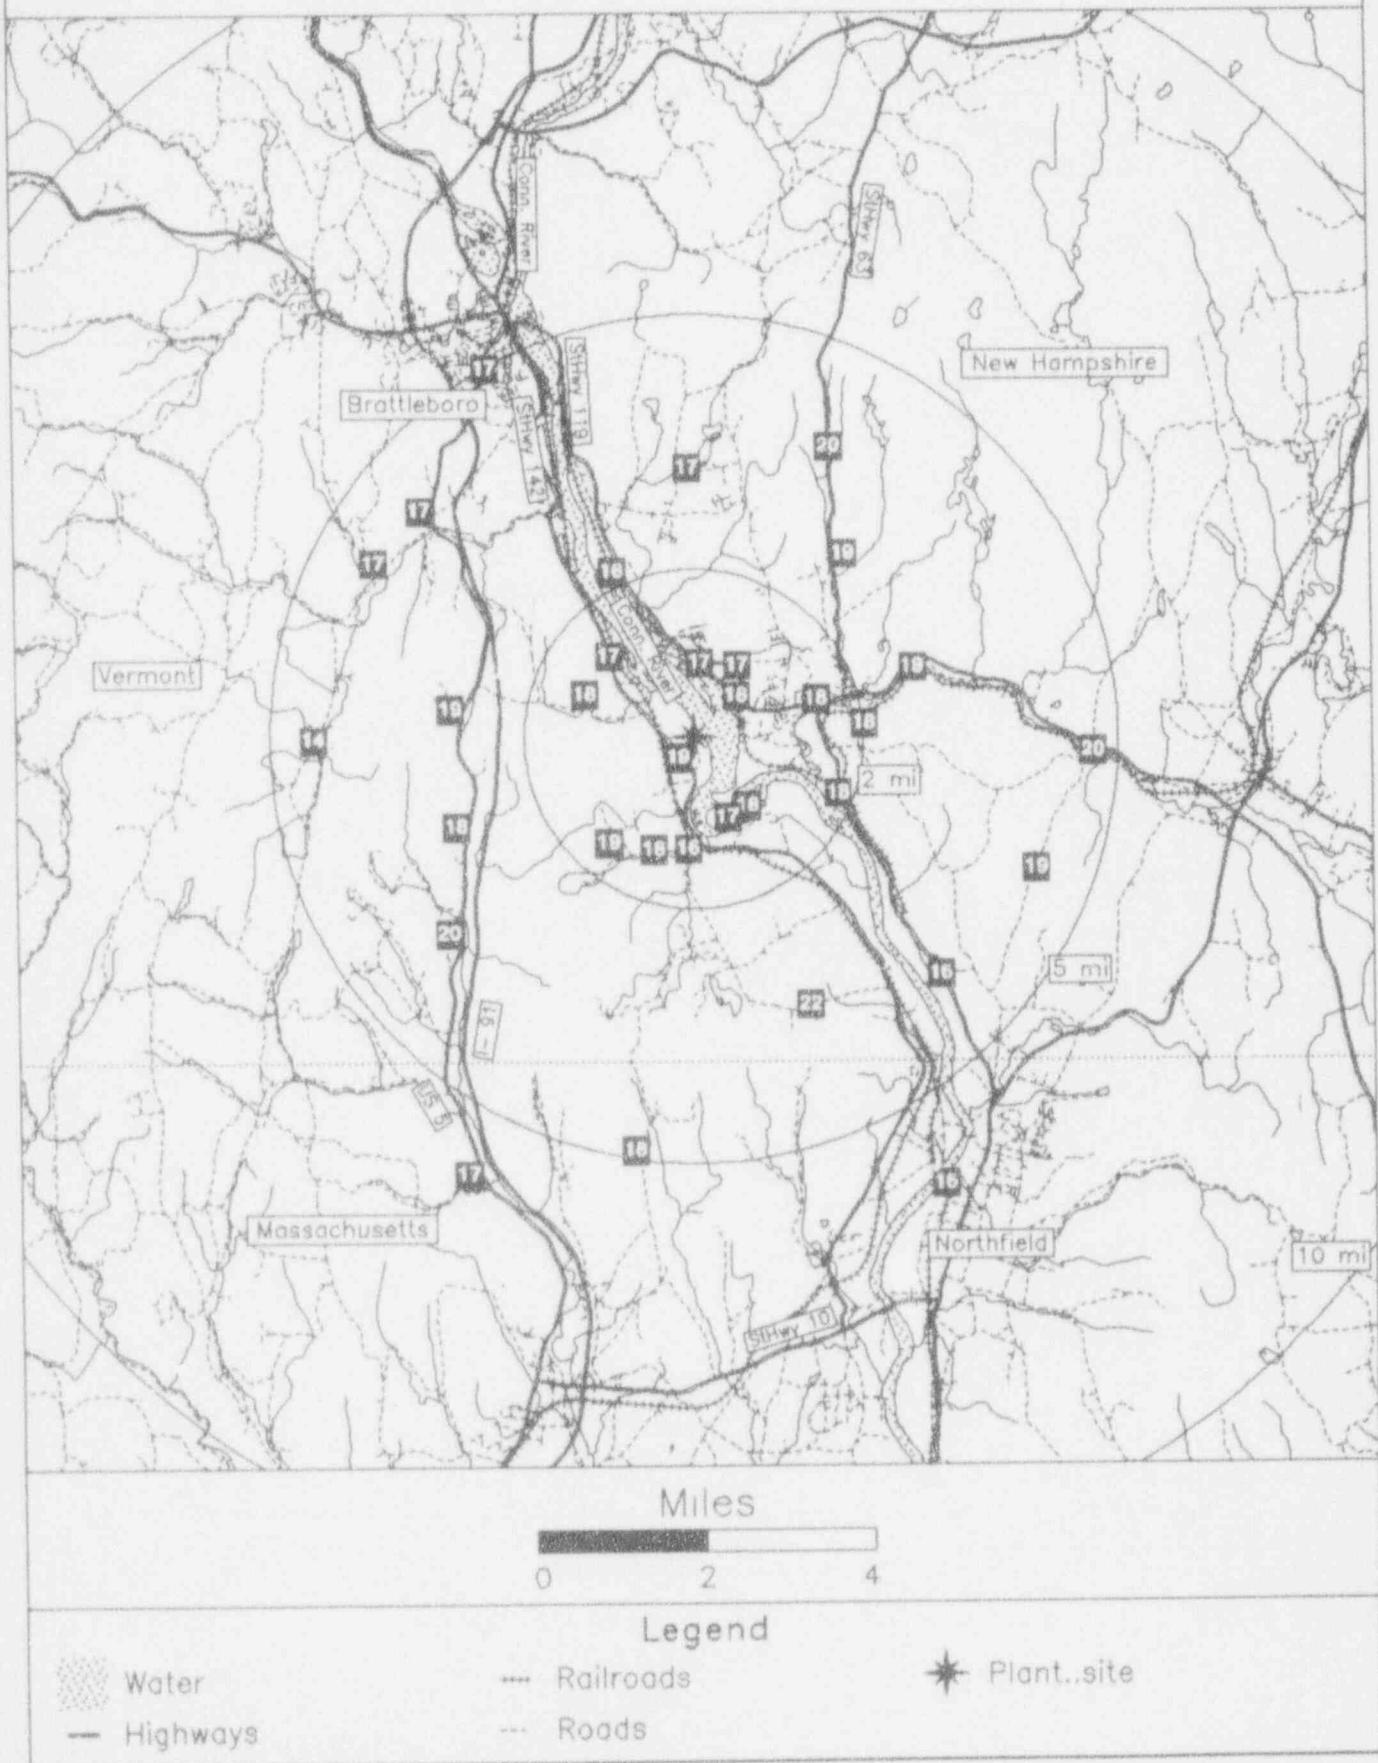

VOGTLE (GA)

TLD Direct Radiation Environmental Monitoring
 For the period 930914-940208 148 Days
 Field Time: 101 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	298	1.6	22.2 +- 0.7; 3.3	11.9 +- 0.7; 4.4
2	309	1.6	23.0 +- 0.7; 3.5	12.6 +- 0.8; 4.5
3	336	1.4	20.8 +- 0.6; 3.1	10.7 +- 0.7; 4.3
4	270	1.3	21.4 +- 0.6; 3.2	11.2 +- 0.7; 4.4
5	247	1.2	22.4 +- 0.7; 3.4	12.1 +- 0.8; 4.5
6	215	1.2	26.2 +- 0.8; 3.9	15.5 +- 0.8; 4.8
7	205	1.2	27.3 +- 0.8; 4.1	16.5 +- 0.9; 4.9
8	180	1.1	27.5 +- 0.8; 4.1	16.6 +- 0.9; 4.9
9	153	1.2	24.8 +- 0.7; 3.7	14.3 +- 0.8; 4.7
10	134	3.2	24.9 +- 0.7; 3.7	14.4 +- 0.8; 4.7
11	103	1.1	20.6 +- 0.6; 3.1	10.5 +- 0.7; 4.3
12	134	3.3	23.6 +- 0.7; 3.5	13.2 +- 0.8; 4.6
13	123	4.2	23.2 +- 0.7; 3.5	12.9 +- 0.8; 4.5
14	141	4.6	20.0 +- 0.6; 3.0	10.0 +- 0.7; 4.3
15	153	5.3	21.4 +- 0.6; 3.2	11.2 +- 0.7; 4.4
16	162	6.3	23.0 +- 0.7; 3.4	12.6 +- 0.8; 4.5
17	157	7.3	21.4 +- 0.6; 3.2	11.2 +- 0.7; 4.4
18	191	4.8	22.1 +- 0.7; 3.3	11.8 +- 0.7; 4.4
19	208	4.7	21.4 +- 0.6; 3.2	11.2 +- 0.7; 4.4
20	232	4.9	21.3 +- 0.6; 3.2	11.1 +- 0.7; 4.4
21	250	5.6	22.4 +- 0.7; 3.4	12.1 +- 0.8; 4.5
22	264	4.3	21.2 +- 0.6; 3.2	11.1 +- 0.7; 4.4
23	301	4.2	Missing Dosimeter	No Net Data
24	308	4.6	20.1 +- 0.6; 3.0	10.1 +- 0.7; 4.3
25	329	6.7	22.7 +- 0.7; 3.4	12.4 +- 0.8; 4.5
26	258	15.0	25.9 +- 0.8; 3.9	15.2 +- 0.8; 4.8
27	300	13.0	27.3 +- 0.8; 4.1	16.5 +- 0.9; 4.9
28	330	30.0	22.6 +- 0.7; 3.4	12.3 +- 0.8; 4.5

Transit Dose = 8.8 +- 0.5; 3.7

VOGTLE (GA)
For the period 930914-940208

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	No Data +- No Data	0
11.26 - 33.75 NNE	No Data +- No Data	0
33.76 - 56.25 NE	No Data +- No Data	0
56.26 - 78.75 ENE	No Data +- No Data	0
78.76 - 101.25 E	No Data +- No Data	0
101.26 - 123.75 ESE	11.7 +- 1.6	2
123.76 - 146.25 SE	12.5 +- 2.3	3
146.26 - 168.75 SSE	12.3 +- 1.5	4
168.76 - 191.25 S	14.2 +- 3.4	2
191.26 - 213.75 SSW	13.9 +- 3.8	2
213.76 - 236.25 SW	13.3 +- 3.1	2
236.26 - 258.75 WSW	12.1 +- 0.0	2
258.76 - 281.25 W	11.1 +- 0.1	2
281.26 - 303.75 WNW	11.9 +- 0.0	1
303.76 - 326.25 NW	11.4 +- 1.8	2
326.26 - 348.75 NNW	11.6 +- 1.2	2

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	13.2 +- 2.3	10
2 - 5	11.7 +- 1.5	9
> 5	11.9 +- 0.7	5
Upwind Control	14.7 +- 2.2	3

VOGTLE (GA)
 TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	298	HANCOCK LANDING & RIVER RD
2	309	0.7 MI. EAST OF RIVER RD(FROM ST.1)
3	336	HANCOCK LANDING RD AT G.P. AIR SAMPLER
4	270	RIVER RD, 1 MI S.OF HANCOCK LANDING RD
5	247	RIVER RD AT DELAGLE MHP
6	215	INTERSECTION OF RIVER & CC ROADS
7	205	RIVER RD 0.3 MI NW OF TLD STATION 18
8	180	RIVER RD 0.4 MI E OF TLD STATION 7
9	153	RIVER RD 0.5 MI E OF TLD STATION 8
10	134	RIVER RD AT PLANT GATE 3
11	103	PLANT WILSON BOUNDARY RD
12	134	NEAR RESIDENCE OF OLD RIVER RD
13	123	GRIFFINS LANDING RD
14	141	GRIFFINS LANDING AND EARLE DIXON RDS
15	153	GRIFFINS LANDING & CHANCE RDS
16	162	GRC/ERN AIR CABINETS
17	157	CITY OF GIRARD
18	191	GA HWY 23 & THOMPSON BRIDGE RD
19	208	GA HWY 23, 1.5 MI NW OF TLD STATION 18
20	232	GA HWY 23 & ESKEW ROAD
21	250	GA HWY 23 & HANCOCK LANDING RD
22	264	HANCOCK LANDING & CLAXTON LIVERLY RDS
23	301	RIVER RD AND HATCHER ROAD
24	308	PIONEER TRAILER PARK ON RIVER RD
25	329	SHELL BLUFF LANDING
26	258	GP DISTRICT OFFI. IN WAYNESBORO
27	300	MCBEAN FIRE STATION
28	330	GA WELCOME CENTER I-20 W, AUGUSTA

NRC TLD DOSES FOR VOGTLE AREA

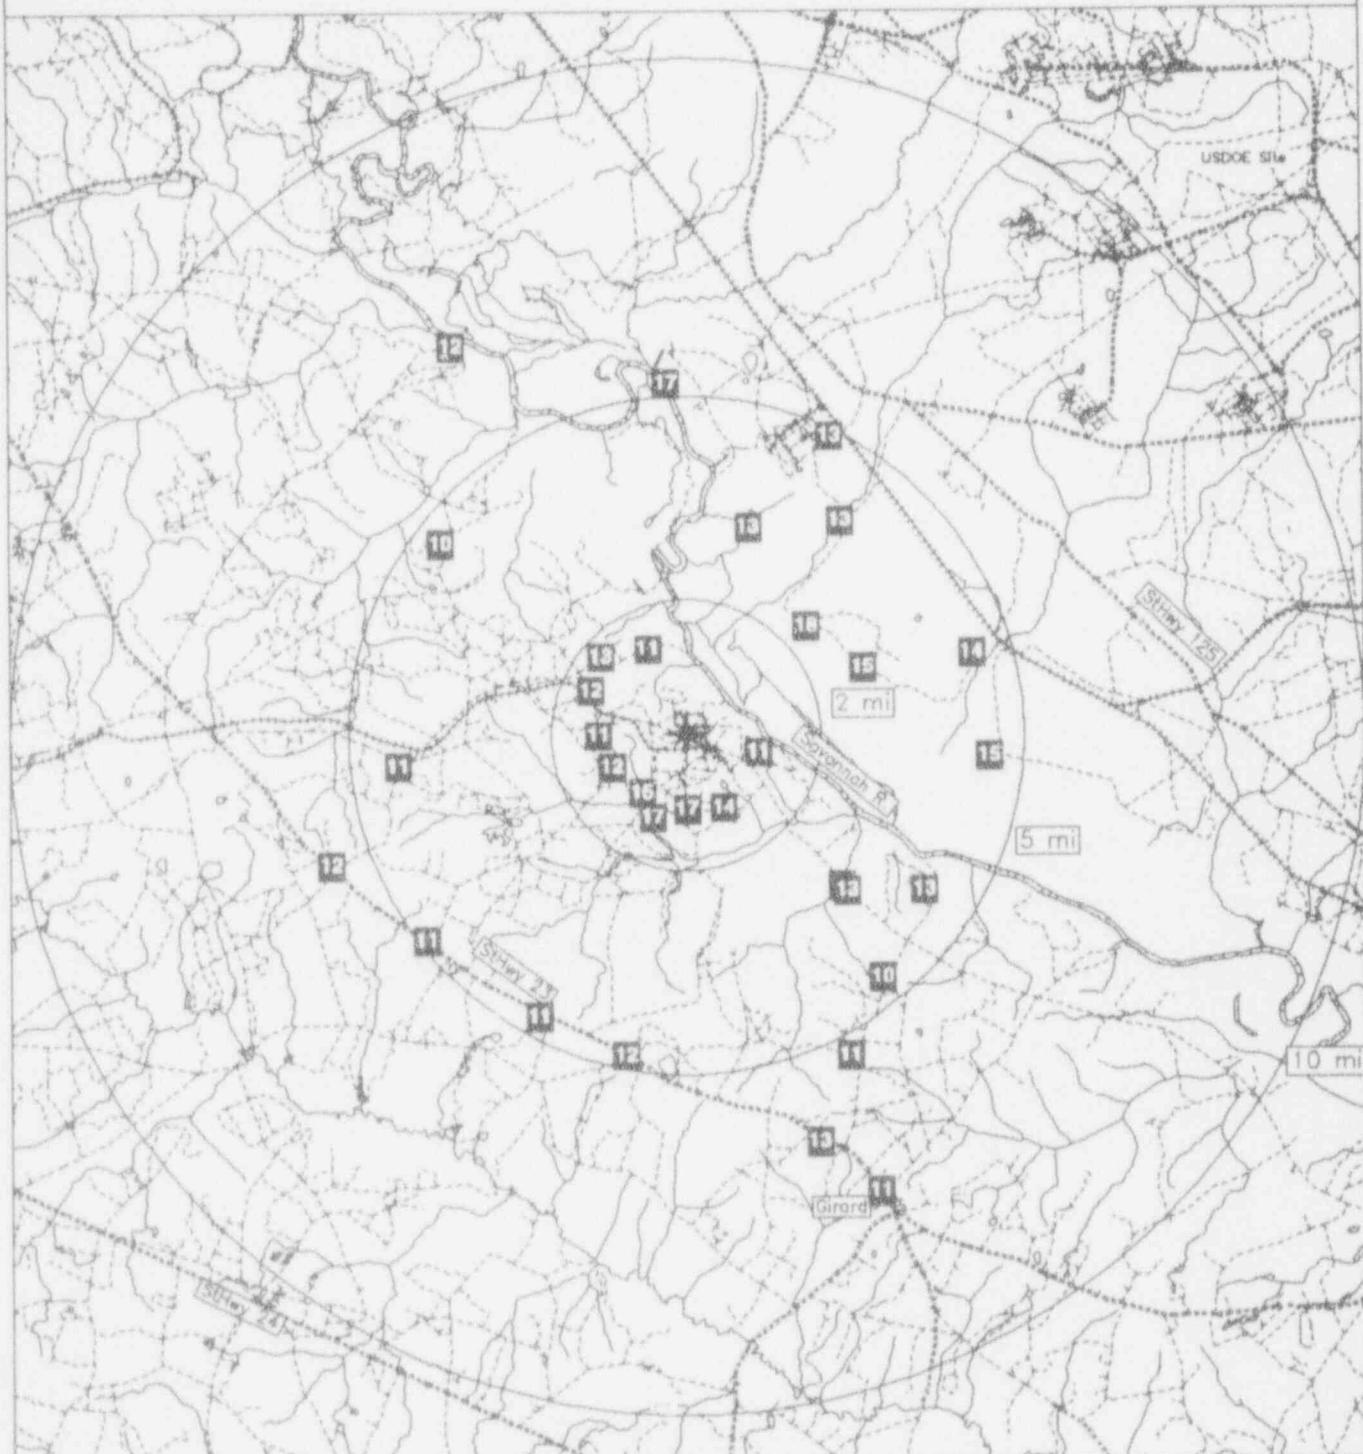

Miles

A horizontal scale bar with tick marks at 0, 2, and 4.

Legend



Water



Railroads



Roads



Plant..site

VOGTLE (SC)
 TLD Direct Radiation Environmental Monitoring
 For the period 930914-940208 148 Days
 Field Time: 101 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
31	357	5.2 25.7 +- 0.8; 3.9	16.7 +- 0.8; 4.7	17.5 +- 4.0
32	26	4.9 21.2 +- 0.6; 3.2	12.6 +- 0.7; 4.2	12.2 +- 2.7
33	17	3.2 21.4 +- 0.6; 3.2	12.8 +- 0.7; 4.3	12.5 +- 2.6
34	36	3.9 21.2 +- 0.6; 3.2	12.6 +- 0.7; 4.2	13.9 +- 2.5
35	48	2.4 27.0 +- 0.8; 4.1	17.8 +- 0.8; 4.8	18.5 +- 2.9
36	69	2.8 24.2 +- 0.7; 3.6	15.3 +- 0.8; 4.5	14.3 +- 2.8
37	74	4.4 22.5 +- 0.7; 3.4	13.8 +- 0.7; 4.3	14.0 +- 4.4
38	94	4.5 23.4 +- 0.7; 3.5	14.6 +- 0.7; 4.4	13.5 +- 2.8

Transit Dose = 7.0 +- 0.5; 3.5

VOGTLE (SC)
For the period 930914-940208

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	16.7 +- 0.0	1
11.26 - 33.75 NNE	12.7 +- 0.1	2
33.76 - 56.25 NE	15.2 +- 3.7	2
56.26 - 78.75 ENE	14.5 +- 1.1	2
78.76 - 101.25 E	14.6 +- 0.0	1
101.26 - 123.75 ESE	No Data +- No Data	0
123.76 - 146.25 SE	No Data +- No Data	0
146.26 - 168.75 SSE	No Data +- No Data	0
168.76 - 191.25 S	No Data +- No Data	0
191.26 - 213.75 SSW	No Data +- No Data	0
213.76 - 236.25 SW	No Data +- No Data	0
236.26 - 258.75 WSW	No Data +- No Data	0
258.76 - 281.25 W	No Data +- No Data	0
281.26 - 303.75 WNW	No Data +- No Data	0
303.76 - 326.25 NW	No Data +- No Data	0
326.26 - 348.75 NNW	No Data +- No Data	0

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	No Data +- No Data	0
2 - 5	14.2 +- 1.9	7
> 5	16.7 +- 0.0	1
Upwind Control	No Data +- No Data	0

VOGTLE (SC)
TLD Direct Radiation Environmental Monitoring

NRC Station	Location		Description
	Azimuth / Degree	Distance / Mile	
31	357	5.2	SRP BOAT DOCK(SC)
32	26	4.9	SRP A-12 & SEABOARD COAST RR (SC)
33	17	3.2	1.2 MI FROM INTERSEC.DIRT RD & SRP A12.2
34	36	3.9	INTERSEC.OF SRP A-13 & SRP A-13.2(SC)
35	48	2.4	INTERSEC.OF SRP A-13 & BEAR TRACK RD(SC)
36	69	2.8	2ND INTERSEC. SRP A-13 & BEAR RD(SC)
37	74	4.4	INTERSEC.OF A-13 & SRP A-13.2 (SC)
38	94	4.5	INTERSEC.OF SRP A-17 & WILSON RD(SC)

NRC TLD DOSES FOR VOGTLE AREA

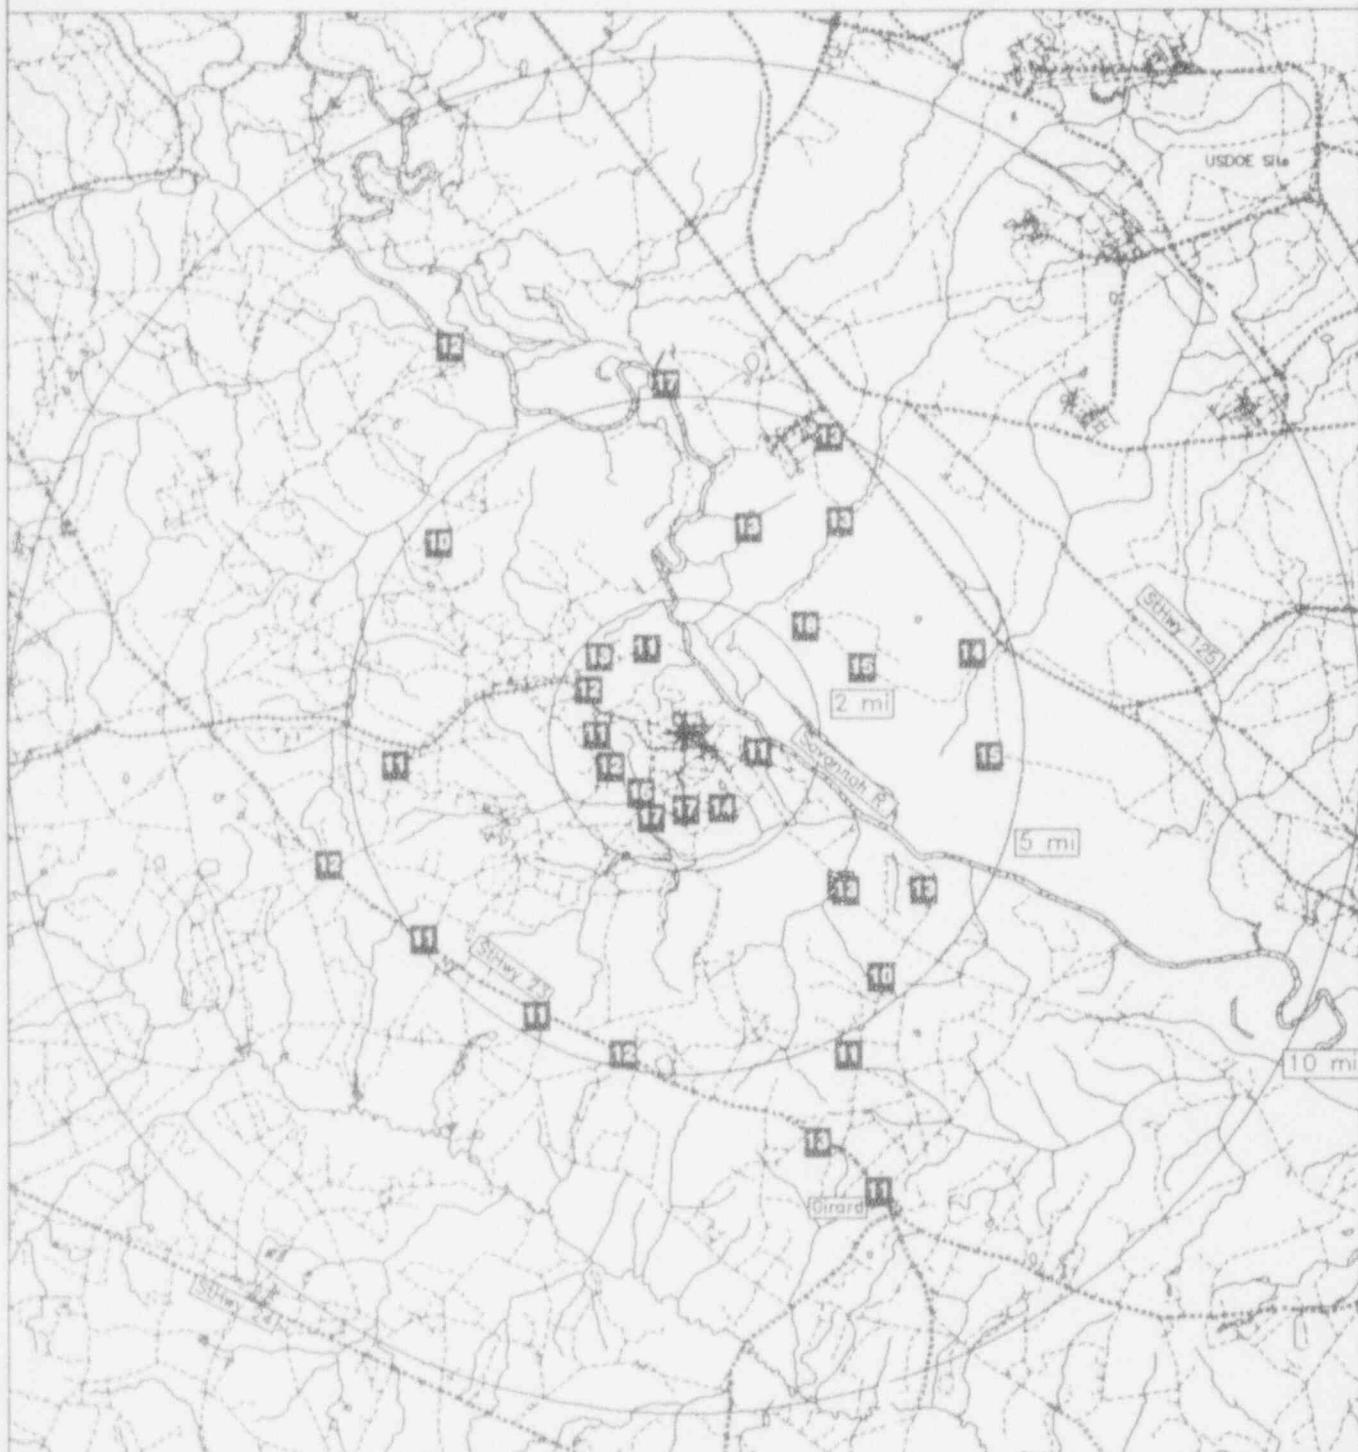

Miles

0 2 4

Legend

Water

Railroads

Roads

Plant site

WASHINGTON NUCLEAR 2
 TLD Direct Radiation Environmental Monitoring
 For the period 930913-940127 137 Days
 Field Time: 96 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	174	12.0	24.0 +- 0.7; 3.6	17.7 +- 0.8; 4.5
2	163	11.0	23.0 +- 0.7; 3.4	16.8 +- 0.7; 4.4
3	161	9.0	23.8 +- 0.7; 3.6	17.6 +- 0.8; 4.5
4	152	5.0	25.1 +- 0.8; 3.8	18.8 +- 0.8; 4.6
5	195	2.0	24.5 +- 0.7; 3.7	18.2 +- 0.8; 4.6
6	220	1.5	24.0 +- 0.7; 3.6	17.8 +- 0.8; 4.5
7	92	3.0	25.4 +- 0.8; 3.8	19.0 +- 0.8; 4.7
8	155	1.0	22.8 +- 0.7; 3.4	16.6 +- 0.7; 4.4
9	130	0.5	25.0 +- 0.8; 3.8	18.7 +- 0.8; 4.6
10	70	0.5	25.1 +- 0.8; 3.8	18.8 +- 0.8; 4.6
11	25	0.8	24.6 +- 0.7; 3.7	18.3 +- 0.8; 4.6
12	315	0.5	25.8 +- 0.8; 3.9	19.5 +- 0.8; 4.7
13	290	0.5	33.2 +- 1.0; 5.0	26.4 +- 1.0; 5.5
14	270	0.5	25.2 +- 0.8; 3.8	18.8 +- 0.8; 4.6
15	245	1.8	24.9 +- 0.7; 3.7	18.6 +- 0.8; 4.6
16	285	3.0	25.1 +- 0.8; 3.8	18.8 +- 0.8; 4.6
17	240	4.0	23.5 +- 0.7; 3.5	17.3 +- 0.8; 4.5
18	198	7.0	22.7 +- 0.7; 3.4	16.6 +- 0.7; 4.4
19	173	8.5	24.3 +- 0.7; 3.6	18.0 +- 0.8; 4.5
20	150	20.0	24.8 +- 0.7; 3.7	18.5 +- 0.8; 4.6
21	114	7.0	23.8 +- 0.7; 3.6	17.6 +- 0.8; 4.5
22	120	8.0	23.5 +- 0.7; 3.5	17.2 +- 0.8; 4.5
23	134	6.0	27.5 +- 0.8; 4.1	21.0 +- 0.9; 4.9
24	110	4.0	29.6 +- 0.9; 4.4	23.0 +- 0.9; 5.1
25	85	5.0	25.1 +- 0.8; 3.8	18.8 +- 0.8; 4.6
26	65	5.0	28.2 +- 0.8; 4.2	21.7 +- 0.9; 5.0
27	53	4.0	25.6 +- 0.8; 3.8	19.3 +- 0.8; 4.7
28	44	8.0	25.6 +- 0.8; 3.8	19.3 +- 0.8; 4.7
29	33	10.0	24.7 +- 0.7; 3.7	18.4 +- 0.8; 4.6
30	8	9.5	27.1 +- 0.8; 4.1	20.7 +- 0.8; 4.9
31	215	15.0	24.0 +- 0.7; 3.6	17.7 +- 0.8; 4.5

Transit Dose = 5.1 +- 0.4; 3.2

WASHINGTON NUCLEAR 2
For the period 930913-940127

TLD Direct Radiation Environmental Monitoring

Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	20.7 +- 0.0	1
11.26 - 33.75 NNE	18.4 +- 0.0	2
33.76 - 56.25 NE	19.3 +- 0.0	2
56.26 - 78.75 ENE	20.2 +- 2.0	2
78.76 - 101.25 E	18.9 +- 0.1	2
101.26 - 123.75 ESE	19.3 +- 3.2	3
123.76 - 146.25 SE	19.9 +- 1.6	2
146.26 - 168.75 SSE	17.7 +- 1.0	5
168.76 - 191.25 S	18.0 +- 0.0	1
191.26 - 213.75 SSW	17.4 +- 1.2	2
213.76 - 236.25 SW	17.8 +- 0.0	1
236.26 - 258.75 WSW	17.9 +- 0.9	2
258.76 - 281.25 W	18.8 +- 0.0	1
281.26 - 303.75 WNW	22.6 +- 5.4	2
303.76 - 326.25 NW	19.5 +- 0.0	1
326.26 - 348.75 NNW	No Data +- No Data	0

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	19.2 +- 2.6	10
2 - 5	19.6 +- 1.8	8
> 5	18.3 +- 1.5	11
Upwind Control	17.7 +- 0.0	2

WASHINGTON NUCLEAR 2
TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	174	STEVENS DR. & VAN GIESEN ST.
2	163	HANDFORD SCHOOL
3	161	BENTON BLVD.
4	152	RT. 4 AT RR CROSSING
5	195	RT. 4& WNP 1-4 ACCESS RD.
6	220	RT. 4 N. OF FFTF ACCESS RD.
7	92	WNP-2 INTAKE STRUCTURE
8	155	WNP 1-4 ACCESS RD. & WNP-2 CUTOFF
9	130	WNP-2 CUTOFF&WASTE WTR TRTMNT ACC.RD.
10	70	WNP-4 EXCLUS.BOUNDARY BY WNP-2 CUTOFF
11	25	N.W.CORNER WNP-4 EXCLUSION BOUNDARY
12	315	B.P.A.H.J. ASHE SUBSTATION
13	290	WNP-2 EXCLUSION BOUNDARY
14	270	WPPSS METEOROLOGY STATION
15	245	RT. 4&WNP-2 ACCESS ROAD
16	285	WYE BARRICADE
17	240	RT.10 & FFTF ACCESS ROAD
18	198	B.P.A. WHITE BLUFF SUBSTATION
19	173	HORN RAPIDS ROAD ACROSS FROM EXXON
20	150	RD.#36 & RUBY IN PASCO
21	114	EDWIN MARKHAM SCHOOL
22	120	BPA BAXTER SUBSTATION
23	134	COTTONWOOD ROAD N. OF PASCO
24	110	END OF FIR ROAD N.W. OF PASCO
25	85	GLENWOOD & GUM INTERSECTION
26	65	ELTOPIA RINGOLD ROAD
27	53	RINGOLD FISH HATCHERY
28	44	RD.#170 & KLAMATH INTERSECTION
29	33	WAHLUKE SO. & BASIN HILL RD. INTERSECTION
30	8	HOLLINGSWORTH & MT. VISTA RD.
31	215	ACORD & WHAN RD. INTERSECTION

NRC TLD DOSES FOR WNP-2 AREA



WATERFORD

TLD Direct Radiation Environmental Monitoring
 For the period 931006-940209 127 Days
 Field Time: 91 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.			Hist. Range Net Exp Rate +-1 Std Dev				
			15.3	15.3	15.3	16.0	16.0			
1	101	0.4	17.0	+- 0.5;	2.5	15.3	+- 0.6;	3.7	16.0	+- 2.5
2	116	1.1	14.6	+- 0.4;	2.2	12.9	+- 0.5;	3.5	15.8	+- 2.7
3	132	1.3	19.8	+- 0.6;	3.0	18.1	+- 0.6;	4.0	17.9	+- 2.7
4	160	1.8	16.8	+- 0.5;	2.5	15.1	+- 0.6;	3.7	15.9	+- 2.5
5	183	1.4	18.3	+- 0.5;	2.7	16.5	+- 0.6;	3.9	15.4	+- 2.4
6	202	1.2	16.4	+- 0.5;	2.5	14.7	+- 0.6;	3.7	16.1	+- 2.8
7	226	1.2	16.2	+- 0.5;	2.4	14.5	+- 0.6;	3.6	15.5	+- 2.4
8	248	1.3	18.6	+- 0.6;	2.8	16.9	+- 0.6;	3.9	17.4	+- 2.4
9	265	1.9	15.9	+- 0.5;	2.4	14.2	+- 0.5;	3.6	14.9	+- 2.8
10	186	4.2	19.8	+- 0.6;	3.0	18.0	+- 0.6;	4.0	17.2	+- 2.5
11	315	4.4	16.4	+- 0.5;	2.5	14.7	+- 0.6;	3.7	16.6	+- 2.5
12	328	4.1	18.3	+- 0.5;	2.7	16.6	+- 0.6;	3.9	17.3	+- 2.6
13	309	0.8	17.1	+- 0.5;	2.6	15.4	+- 0.6;	3.7	15.4	+- 2.4
14	273	0.9	19.8	+- 0.6;	3.0	18.0	+- 0.6;	4.0	17.7	+- 3.2
15	292	0.8	Missing Dosimeter			No Net Data		14.3	+- 2.7	
16	335	0.5	15.6	+- 0.5;	2.3	13.9	+- 0.5;	3.6	13.9	+- 2.3
17	120	4.3	16.8	+- 0.5;	2.5	15.1	+- 0.6;	3.7	13.9	+- 2.6
18	145	3.5	17.1	+- 0.5;	2.6	15.4	+- 0.6;	3.7	14.5	+- 1.6
19	153	8.1	18.1	+- 0.5;	2.7	16.4	+- 0.6;	3.8	16.3	+- 2.7
20	133	8.1	17.1	+- 0.5;	2.6	15.4	+- 0.6;	3.7	16.5	+- 2.6
21	116	6.7	17.7	+- 0.5;	2.7	16.0	+- 0.6;	3.8	15.2	+- 2.7
22	95	4.3	16.8	+- 0.5;	2.5	15.1	+- 0.6;	3.7	15.7	+- 2.5
23	86	2.6	17.2	+- 0.5;	2.6	15.5	+- 0.6;	3.7	15.4	+- 2.6
24	66	4.2	20.0	+- 0.6	3.0	18.3	+- 0.7;	4.0	18.5	+- 2.7
25	37	3.5	18.1	+- 0.!	2.7	16.4	+- 0.6;	3.8	16.9	+- 2.6
26	23	3.8	15.9	+- 0.5;	2.4	14.2	+- 0.5;	3.6	14.5	+- 2.7
27	350	4.9	17.2	+- 0.5;	2.6	15.5	+- 0.6;	3.7	15.6	+- 2.5
28	335	5.0	17.0	+- 0.5;	2.5	15.3	+- 0.6;	3.7	16.0	+- 2.6
29	6	2.8	15.5	+- 0.5;	2.3	13.8	+- 0.5;	3.6	14.4	+- 2.7
30	356	1.1	19.9	+- 0.6;	3.0	18.1	+- 0.6;	4.0	15.5	+- 2.9
31	15	0.8	16.7	+- 0.5;	2.5	15.0	+- 0.6;	3.7	16.6	+- 2.9
32	40	0.8	13.9	+- 0.4;	2.1	12.2	+- 0.5;	3.4	14.6	+- 2.9
33	69	1.1	Missing Dosimeter			No Net Data		16.2	+- 3.7	
34	292	15.0	17.3	+- 0.5;	2.6	15.6	+- 0.6;	3.8	16.0	+- 2.9
35	282	27.0	19.5	+- 0.6;	2.9	17.7	+- 0.6;	4.0	17.9	+- 2.9
36	268	21.0	15.6	+- 0.5;	2.3	13.9	+- 0.5;	3.6	14.8	+- 2.9

Transit Dose = 1.5 +- 0.3; 2.8

WATERFORD
For the period 931006-940209

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	15.8 +- 2.2	3
11.26 - 33.75 NNE	14.6 +- 0.5	2
33.76 - 56.25 NE	14.3 +- 2.9	2
56.26 - 78.75 ENE	18.3 +- 0.0	1
78.76 - 101.25 E	15.3 +- 0.2	3
101.26 - 123.75 ESE	14.6 +- 1.6	3
123.76 - 146.25 SE	16.3 +- 1.5	3
146.26 - 168.75 SSE	15.7 +- 0.9	2
168.76 - 191.25 S	17.3 +- 1.1	2
191.26 - 213.75 SSW	14.7 +- 0.0	1
213.76 - 236.25 SW	14.5 +- 0.0	1
236.26 - 258.75 WSW	16.9 +- 0.0	1
258.76 - 281.25 W	16.1 +- 2.7	2
281.26 - 303.75 WNW	No Data +- No Data	0
303.76 - 326.25 NW	15.0 +- 0.4	2
326.26 - 348.75 NNW	15.3 +- 1.3	3

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	15.4 +- 1.8	15
2 - 5	15.7 +- 1.3	13
> 5	15.9 +- 0.5	3
Upwind Control	15.8 +- 1.9	3

WATERFORD
TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	101	UTILITY POLE NEAR RIVER ROAD ENTR TO W-3
2	116	CORNER OF FENCE OF LP&L SUBSTATION ON 3142
3	132	UTILITY POLE AT WITCO EMPLOYEES ENTRANCE
4	160	ROAD SIGN AT INT. OF LA 3142 & LA 3127
5	183	CORNER OF FENCE TEXACO VALVE STATION, LA 3127
6	202	GATE POST AT ENTR. TO W-3 TRAINING CENTER/EOC
7	226	STEEL GATE POST # 97 ON LA 3127
8	248	STEEL FENCE POST 2.3 MI W. OF LA 3127 & 3142
9	265	ROAD SIGN AT INT. OF LA 3127 & LA 3141
10	186	PARISH BOUNDARY ROAD SIGN ON LA 3127
11	315	UTILITY POLE AT ENTR. TO GOLD MINE PLANTATION
12	328	UT.POLE, 1 MI E OF GOLD MINE PLNTN ON RIVER RD
13	309	AIR SAMP STA ON RIV RD NR LA 3141
14	273	RR (1/2) SIGN SIDE OF KILLONA SCH
15	292	AIR SAMP STATION 0.3 MI N. OF KILLONA SCHOOL
16	335	FENCE AROUND WATERFORD 1&2 INTAKE
17	120	UTILITY POLE FRONT OF ST. CHARLES CRT HSE
18	145	ROAD SIGN S. SIDE OF LA 3127 & LA 3160
19	153	UTIL POLE, ENTRANCE TO HAHNVILLE SCH. HWY 90
20	133	FENCE BEHIND LP&L LULING DISTRICT OFFICE
21	116	UTIL POLE BEFORE ENTRANCE TO DESTREHAN H.S.
22	95	UTILITY POLE NEAR LA 48 & LA 627/GOOD HOPE
23	86	UTIL POLE NEAR ENTR TO SHELL CHEM NORCO PLANT
24	66	UTILITY POLE NR ENTR NORCO LIONS REC. PARK
25	37	SPILLWAY SIGN NEAR US61/LA628 NXT TO SPILLWAY
26	23	UTILITY POLE AT DOT WEIGH STATION ON US 61
27	350	UTIL POLE ACROSS FROM TWIN OAKS NURSING HOME
28	335	MILESVILLE SCH NR LEVEE IN LAPLAICE
29	6	UTILITY POLE FRONT OF BAYOU STEEL, RIVER RD
30	356	BACK RIGHT OF LA 628 FENCE FOR WATER TOWER
31	15	GATE ENTR TO POWER TOWER NEXT TO LITTLE GYPSY
32	40	R CORNER FENCE, LITTLE GYPSY INTAKE
33	69	L SIDE SPILLWAY GATE NR MONTZ PARK
34	292	ROAD SIGN AT US61/LA641 NEAR RESERVE, LA
35	282	UTILITY POLE SOUTH OF SUNSHINE BRIDGE
36	268	UTILITY POLE FRONT OF ST.JAMES PO, RIVER RD.

NRC TLD DOSES FOR WATERFORD AREA

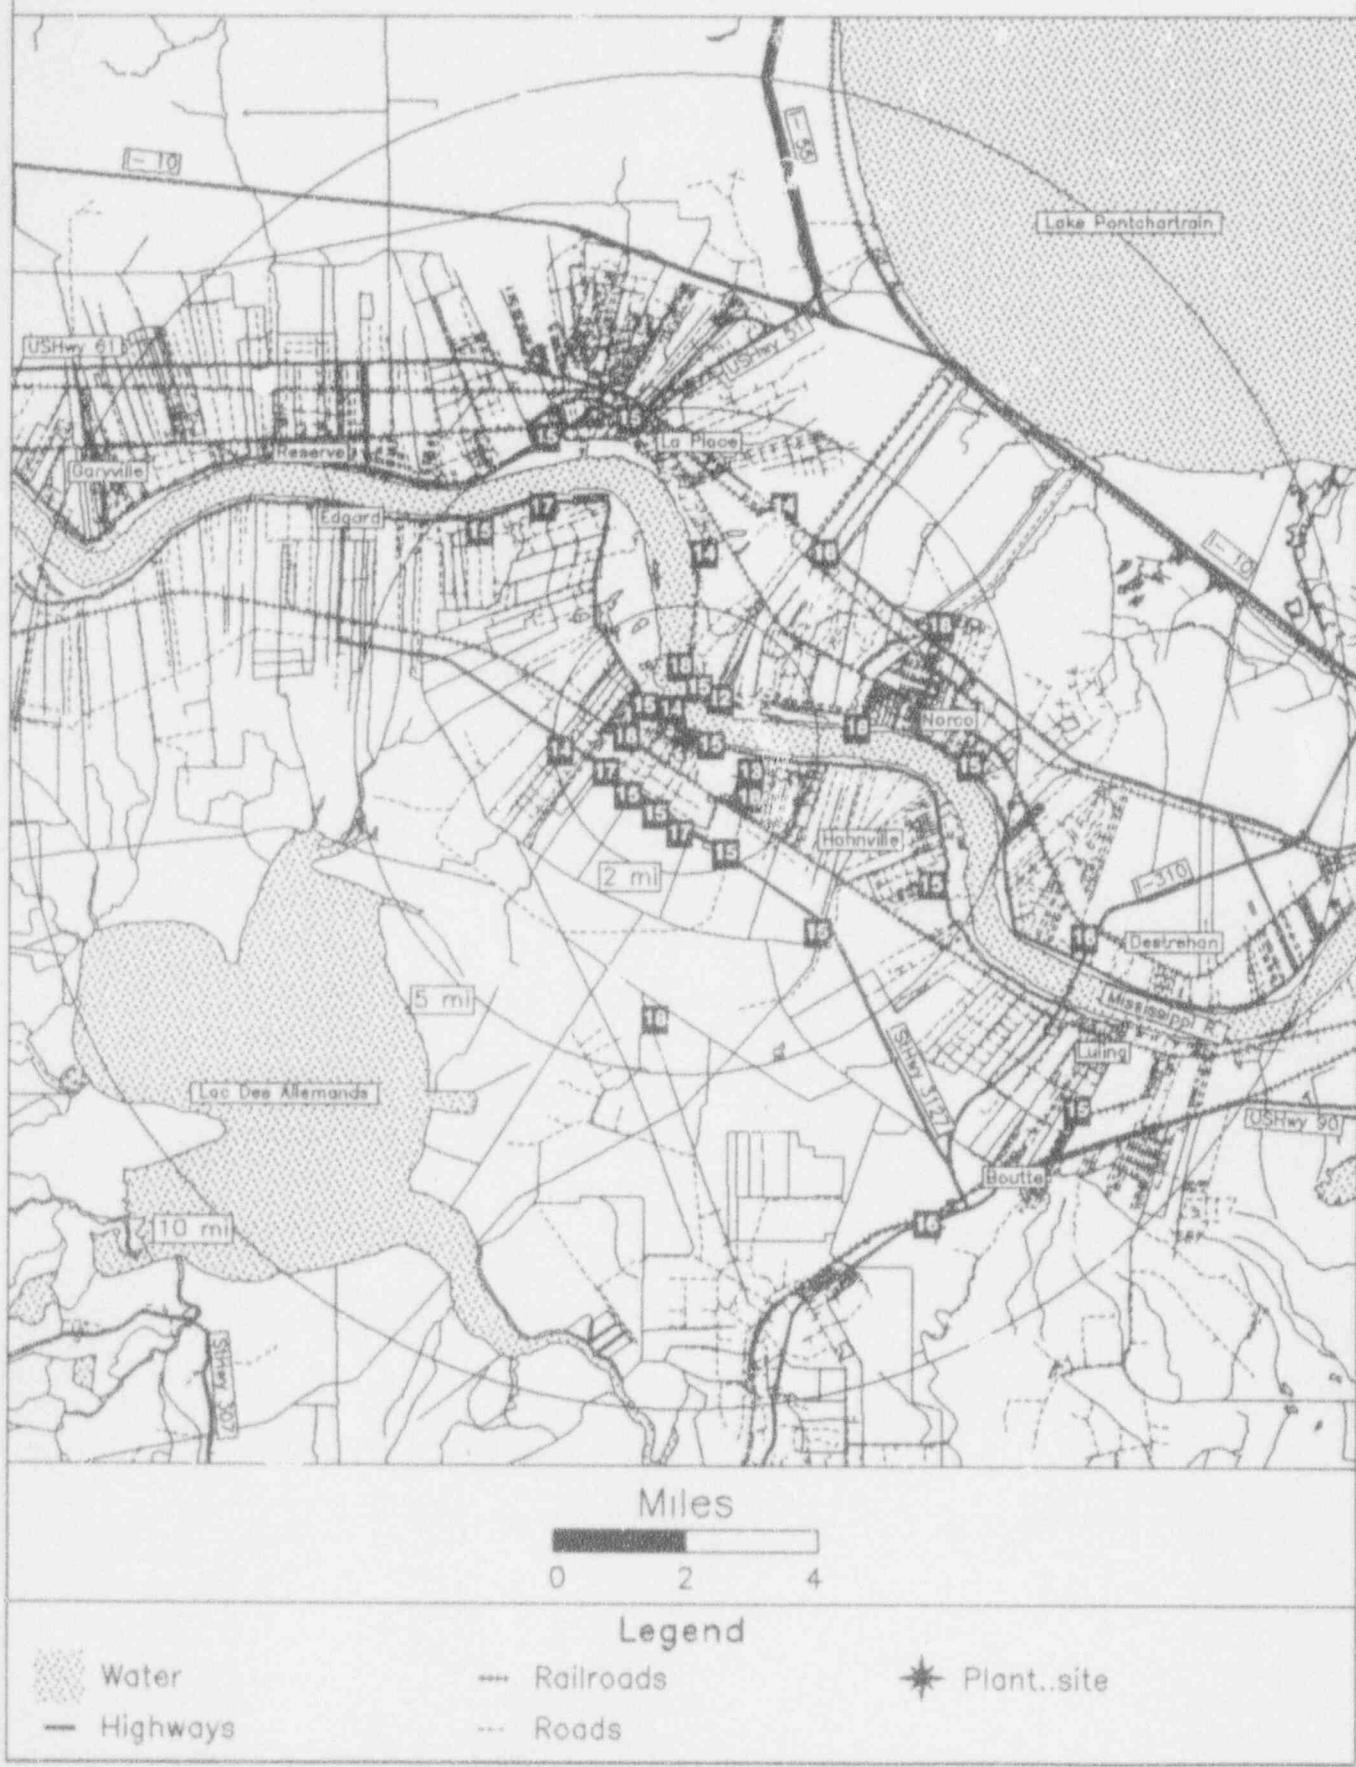

WATTS BAR

TLD Direct Radiation Environmental Monitoring
 For the period 930914-940208 148 Days
 Field Time: 106 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.			Hist. Range Net Exp Rate +-1 Std Dev	
1	337	0.9	23.5 +- 0.7; 3.5	17.9 +- 0.7; 4.1		17.1 +- 2.3	
2	314	2.1	23.1 +- 0.7; 3.5	17.6 +- 0.7; 4.0		17.3 +- 2.4	
3	297	1.9	22.7 +- 0.7; 3.4	17.2 +- 0.6; 4.0		17.3 +- 2.6	
4	272	2.0	23.2 +- 0.7; 3.5	17.7 +- 0.7; 4.1		16.7 +- 2.5	
5	251	1.9	27.0 +- 0.8; 4.1	20.9 +- 0.7; 4.4		19.0 +- 2.4	
6	235	1.8	25.5 +- 0.8; 3.8	19.6 +- 0.7; 4.3		20.6 +- 2.9	
7	230	3.8	27.8 +- 0.8; 4.2	21.6 +- 0.8; 4.5		19.3 +- 2.7	
8	208	3.6	25.9 +- 0.8; 3.9	20.0 +- 0.7; 4.3		18.0 +- 2.6	
9	249	4.2	24.0 +- 0.7; 3.6	18.4 +- 0.7; 4.1		15.4 +- 2.3	
10	266	3.1	24.5 +- 0.7; 3.7	18.8 +- 0.7; 4.2		16.6 +- 2.3	
11	289	3.3	20.7 +- 0.6; 3.1	15.6 +- 0.6; 3.8		14.2 +- 2.3	
12	310	4.7	21.1 +- 0.6; 3.2	15.9 +- 0.6; 3.9		14.6 +- 2.4	
13	337	3.6	24.6 +- 0.7; 3.7	18.8 +- 0.7; 4.2		15.3 +- 2.8	
14	330	7.0	22.1 +- 0.7; 3.3	16.7 +- 0.6; 4.0		15.2 +- 2.3	
15	350	4.7	25.8 +- 0.8; 3.9	19.9 +- 0.7; 4.3		18.6 +- 2.7	
16	7	1.1	28.9 +- 0.9; 4.3	22.5 +- 0.8; 4.6		19.9 +- 2.7	
17	23	1.6	19.7 +- 0.6; 3.0	14.7 +- 0.6; 3.7		13.1 +- 2.1	
18	41	2.3	23.1 +- 0.7; 3.5	17.5 +- 0.7; 4.0		16.1 +- 2.5	
19	69	1.3	26.4 +- 0.8; 4.0	20.4 +- 0.7; 4.4		18.6 +- 2.2	
20	89	1.2	24.8 +- 0.7; 3.7	19.0 +- 0.7; 4.2		20.2 +- 2.7	
21	114	1.1	22.8 +- 0.7; 3.4	17.3 +- 0.6; 4.0		15.7 +- 2.3	
22	141	1.0	25.6 +- 0.8; 3.8	19.7 +- 0.7; 4.3		19.1 +- 2.3	
23	163	1.1	30.8 +- 0.9; 4.6	24.1 +- 0.8; 4.8		21.9 +- 2.6	
24	187	1.1	26.8 +- 0.8; 4.0	20.7 +- 0.7; 4.4		18.0 +- 2.6	
25	203	1.2	20.1 +- 0.6; 3.0	15.0 +- 0.6; 3.8		18.2 +- 2.8	
26	184	5.9	25.3 +- 0.8; 3.8	19.5 +- 0.7; 4.3		17.8 +- 3.0	
27	176	4.5	24.7 +- 0.7; 3.7	18.9 +- 0.7; 4.2		17.3 +- 2.6	
28	161	3.5	24.2 +- 0.7; 3.6	18.5 +- 0.7; 4.1		16.1 +- 2.2	
29	144	3.0	24.1 +- 0.7; 3.6	18.5 +- 0.7; 4.1		16.7 +- 2.5	
30	117	3.1	22.1 +- 0.7; 3.3	16.7 +- 0.6; 4.0		15.8 +- 2.6	
31	97	4.0	24.1 +- 0.7; 3.6	18.4 +- 0.7; 4.1		16.2 +- 2.5	
32	76	4.1	20.4 +- 0.6; 3.1	15.3 +- 0.6; 3.8		13.7 +- 2.3	
33	32	4.1	24.3 +- 0.7; 3.6	18.6 +- 0.7; 4.2		16.9 +- 2.5	
34	36	4.7	20.0 +- 0.6; 3.0	15.0 +- 0.6; 3.8		13.8 +- 2.3	
35	38	19.0	23.5 +- 0.7; 3.5	17.9 +- 0.7; 4.1		15.6 +- 2.4	
36	38	19.0	22.5 +- 0.7; 3.4	17.1 +- 0.6; 4.0		16.6 +- 4.0	
37	38	19.0	25.2 +- 0.8; 3.8	19.4 +- 0.7; 4.2		17.2 +- 2.4	

Transit Dose = 2.4 +- 0.3; 3.3

WATTS BAR
For the period 930914-940208

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	21.2 +- 1.8	2
11.26 - 33.75 NNE	16.6 +- 2.8	2
33.76 - 56.25 NE	16.3 +- 1.8	2
56.26 - 78.75 ENE	17.8 +- 3.6	2
78.76 - 101.25 E	18.7 +- 0.4	2
101.26 - 123.75 ESE	17.0 +- 0.4	2
123.76 - 146.25 SE	19.1 +- 0.9	2
146.26 - 168.75 SSE	21.3 +- 4.0	2
168.76 - 191.25 S	19.7 +- 0.9	3
191.26 - 213.75 SSW	17.5 +- 3.5	2
213.76 - 236.25 SW	20.6 +- 1.4	2
236.26 - 258.75 WSW	19.6 +- 1.8	2
258.76 - 281.25 W	18.2 +- 0.8	2
281.26 - 303.75 WNW	16.4 +- 1.2	2
303.76 - 326.25 NW	16.7 +- 1.2	2
326.26 - 348.75 NNW	17.8 +- 1.1	3

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	19.1 +- 2.6	14
2 - 5	18.0 +- 1.8	18
> 5	18.1 +- 1.9	2
Upwind Control	18.1 +- 1.2	3

WATTS BAR
TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	337	EAST OF PLANT ACCESS RD.
2	314	HWY. 68 & OLD DIXIE HWY.
3	297	OLD DIXIE HWY. (HOUSE #286)
4	272	OLD DIXIE HWY. (NEAR BRIDGE)
5	251	NEAR YELLOW CR. BAPTIST CHURCH
6	235	END OF ROAD PAST YELLOW CR. BAPTIST CHURCH
7	230	INTERSECTION - BREEDENTON FERRY RD.
8	208	BOGLES CHAPEL
9	249	INTERSECTION - OLD DIXIE HWY.
10	266	INTERSECTION - OLD DIXIE HWY.
11	289	J&H PALLET CO.
12	310	HWY. 68 & WOLFE CR. RD.
13	337	WOLFE CR. RD. INTERSECTION
14	330	WATER TREATMENT PLANT
15	350	WELSH RESIDENCE
16	7	WATTS BAR DAM SUBSTATION
17	23	BEACH PARKING AREA
18	41	NEAR MEIGS CO. TRASH COMPACTOR
19	69	RIVER RD. NEAR CHICKEN SHED
20	89	HIGH TENSION TOWER
21	114	RIVER RD. BURNED-OUT HOUSE
22	141	RIVER RD. RED BRICK HOUSE
23	163	RIVER RD. NEAR STONEWALL
24	187	CAPTAIN JOHN'S RESTAURANT
25	203	NEAR BOAT DOCK OFF RIVER RD.
26	184	ARRANT RD. & RIVER RD.
27	176	EAVES FERRY RD. & HWY. 58
28	161	HOUSE #584
29	144	FAIRVIEW SCHOOL
30	117	BMLHT 771/772
31	97	FEZZELL RD. & HWY. 58
32	76	HICKORY FLAT CHURCH
33	32	NEAR BIVENS LAKESIDE MARKET
34	36	SAM'S BOAT DOCK
35	38	NEAR EXXON STATION - GEN'L STORE
36	38	PARKING AREA OFF HWY. 68
37	38	OFF HWY. 68 AT RED BARN WITH SILO

NRC TLD DOSES FOR WATTS BAR AREA

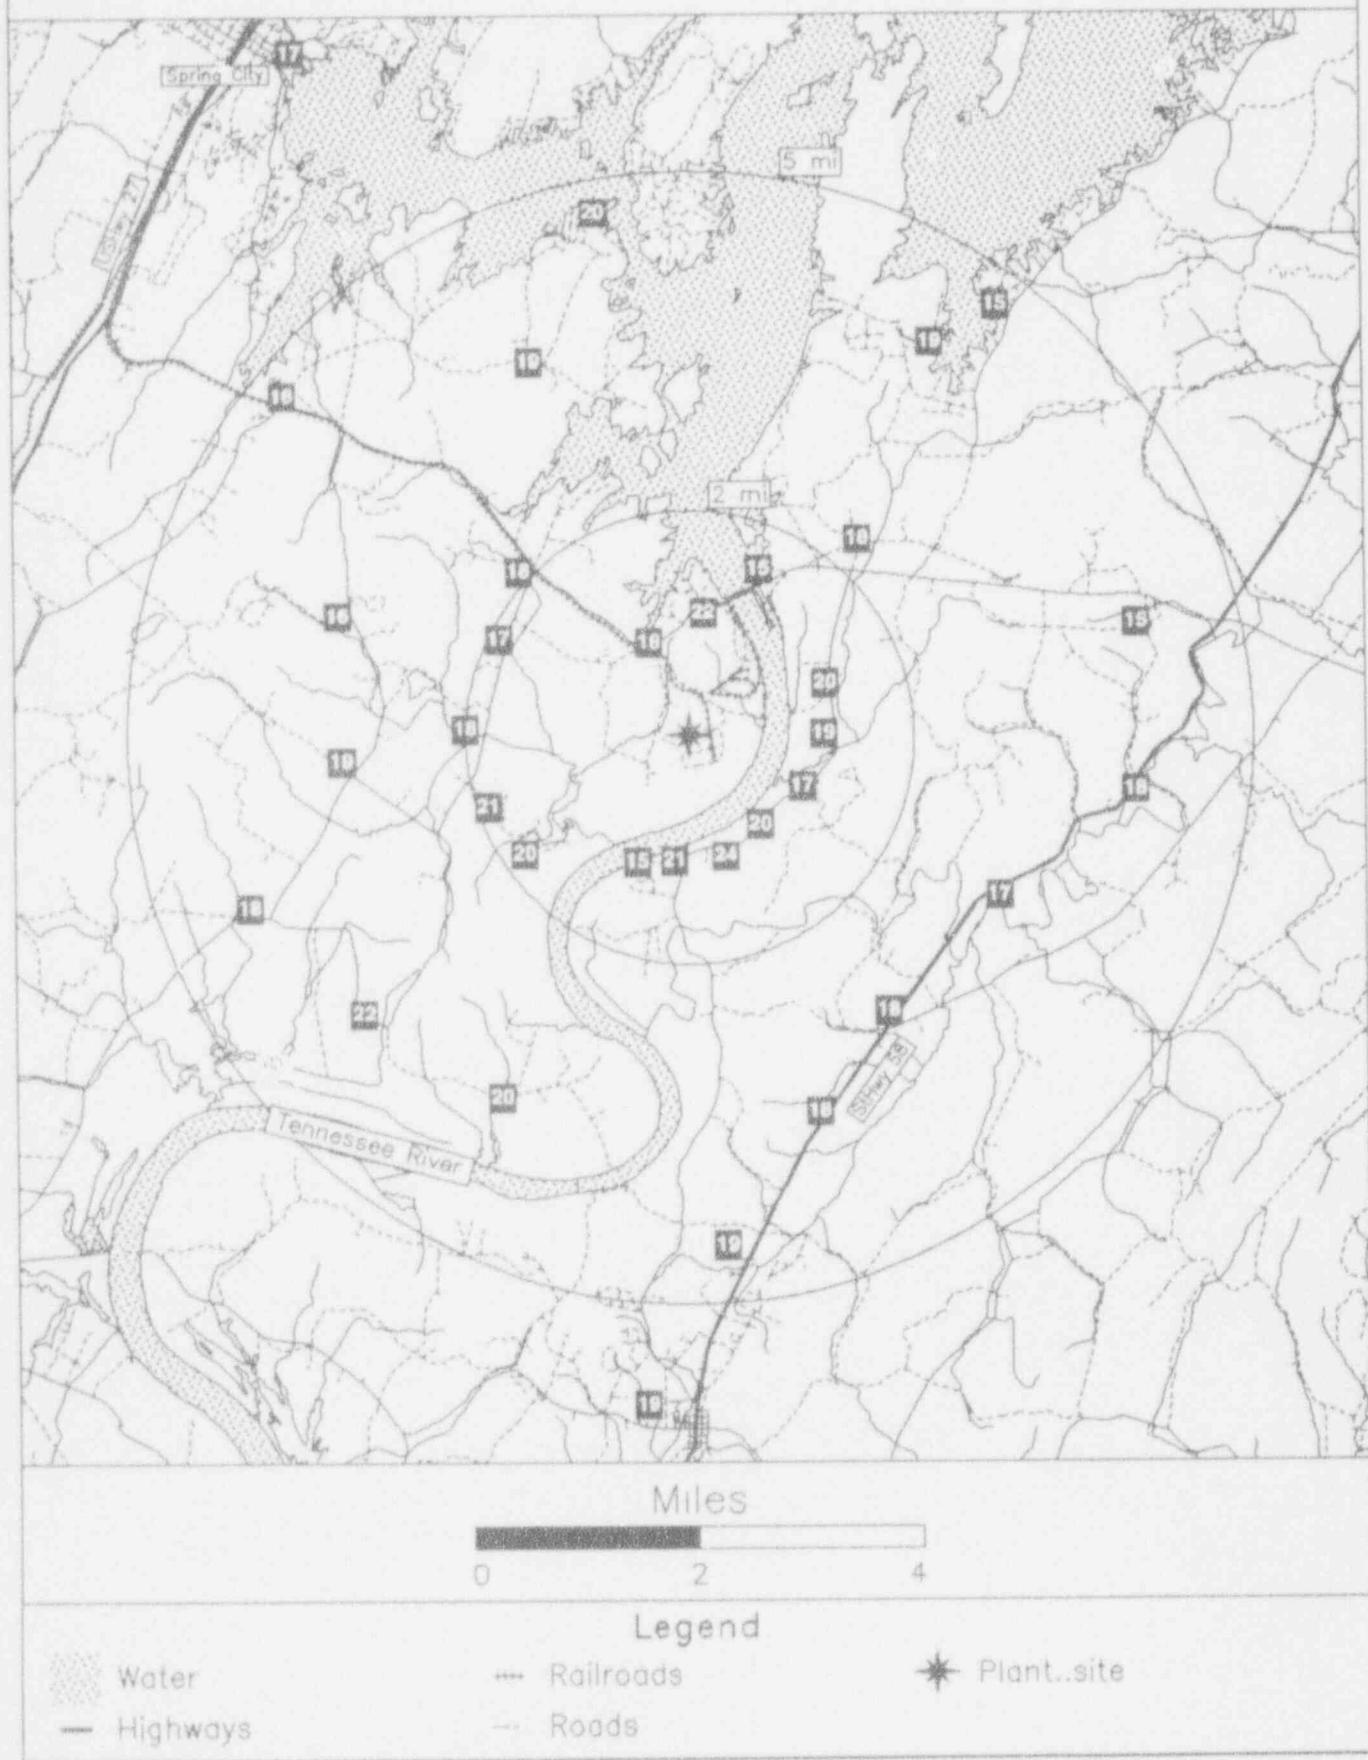

WOLF CREEK
 TLD Direct Radiation Environmental Monitoring
 For the period 930913-940203 144 Days
 Field Time: 93 Days

NRC Sta	Location	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	316	2.9 29.1 +- 0.9; 4.4	22.3 +- 0.9; 5.2	19.6 +- 1.9
2	330	1.8 27.3 +- 0.8; 4.1	20.6 +- 0.9; 5.0	18.5 +- 1.8
3	360	2.8 26.7 +- 0.8; 4.0	20.0 +- 0.9; 5.0	18.9 +- 1.9
4	355	1.6 25.6 +- 0.8; 3.8	19.0 +- 0.8; 4.8	19.5 +- 2.0
5	31	1.8 26.8 +- 0.8; 4.0	20.1 +- 0.9; 5.0	19.6 +- 2.1
6	47	2.0 22.6 +- 0.7; 3.4	16.0 +- 0.8; 4.5	17.4 +- 2.1
7	70	1.6 25.3 +- 0.8; 3.8	18.6 +- 0.8; 4.8	18.2 +- 2.0
8	90	1.7 29.1 +- 0.9; 4.4	22.3 +- 0.9; 5.2	20.2 +- 1.9
9	111	2.4 27.5 +- 0.8; 4.1	20.8 +- 0.9; 5.1	19.6 +- 1.9
10	137	2.5 26.5 +- 0.8; 4.0	19.8 +- 0.9; 4.9	19.2 +- 1.9
11	157	3.4 28.4 +- 0.9; 4.3	21.6 +- 0.9; 5.2	20.6 +- 1.9
12	184	3.3 28.5 +- 0.9; 4.3	21.8 +- 0.9; 5.2	20.1 +- 1.8
13	213	2.9 25.5 +- 0.8; 3.8	18.8 +- 0.8; 4.8	19.7 +- 2.0
14	233	2.4 27.9 +- 0.8; 4.2	21.2 +- 0.9; 5.1	19.9 +- 2.0
15	248	2.2 26.5 +- 0.8; 4.0	19.8 +- 0.9; 4.9	19.4 +- 1.8
16	278	2.1 26.0 +- 0.8; 3.9	19.3 +- 0.9; 4.9	19.7 +- 1.7
17	270	3.4 24.0 +- 0.7; 3.6	17.4 +- 0.8; 4.7	16.0 +- 1.7
18	263	4.2 30.7 +- 0.9; 4.6	23.9 +- 1.0; 5.4	21.4 +- 2.0
19	257	5.0 25.9 +- 0.8; 3.9	19.3 +- 0.9; 4.9	19.5 +- 2.0
20	280	3.9 25.6 +- 0.8; 3.8	18.9 +- 0.8; 4.8	18.3 +- 1.5
21	298	3.9 26.7 +- 0.8; 4.0	20.0 +- 0.9; 5.0	19.8 +- 1.7
22	319	4.8 24.4 +- 0.7; 3.7	17.7 +- 0.8; 4.7	18.1 +- 2.2
23	332	5.0 26.8 +- 0.8; 4.0	20.1 +- 0.9; 5.0	19.2 +- 1.8
24	19	3.9 27.9 +- 0.8; 4.2	21.1 +- 0.9; 5.1	19.6 +- 1.8
25	35	4.4 24.3 +- 0.7; 3.6	17.7 +- 0.8; 4.7	17.1 +- 1.7
26	67	4.3 24.6 +- 0.7; 3.7	18.0 +- 0.8; 4.7	18.3 +- 1.9
27	88	4.1 28.3 +- 0.8; 4.2	21.5 +- 0.9; 5.1	19.4 +- 2.1
28	110	4.5 27.9 +- 0.8; 4.2	21.1 +- 0.9; 5.1	19.8 +- 1.7
29	128	4.4 27.3 +- 0.8; 4.1	20.6 +- 0.9; 5.0	20.3 +- 2.1
30	112	16.0 22.5 +- 0.7; 3.4	15.9 +- 0.8; 4.5	17.4 +- 2.0
31	127	9.4 25.1 +- 0.8; 3.8	18.5 +- 0.8; 4.8	17.1 +- 1.8
32	62	11.0 23.2 +- 0.7; 3.5	16.6 +- 0.8; 4.6	17.5 +- 2.0
33	153	5.2 25.2 +- 0.8; 3.8	18.5 +- 0.8; 4.8	19.1 +- 2.0
34	174	4.7 28.0 +- 0.8; 4.2	21.3 +- 0.9; 5.1	20.3 +- 1.9
35	197	5.2 29.2 +- 0.9; 4.4	22.4 +- 0.9; 5.3	20.5 +- 2.1
36	224	4.8 25.7 +- 0.8; 3.9	19.1 +- 0.8; 4.9	18.3 +- 1.7
37	220	14.0 22.3 +- 0.7; 3.3	15.7 +- 0.8; 4.5	15.6 +- 1.6
38	253	6.5 28.7 +- 0.9; 4.3	21.9 +- 0.9; 5.2	19.9 +- 2.3
39	278	10.0 25.7 +- 0.8; 3.9	19.0 +- 0.8; 4.9	19.0 +- 2.0
40	285	15.0 24.2 +- 0.7; 3.6	17.6 +- 0.8; 4.7	16.9 +- 1.6
41	292	6.7 23.9 +- 0.7; 3.6	17.3 +- 0.8; 4.7	18.3 +- 2.0
42	345	13.0 28.7 +- 0.9; 4.3	22.0 +- 0.9; 5.2	20.3 +- 1.9
43	5	7.5 26.0 +- 0.8; 3.9	19.3 +- 0.9; 4.9	19.7 +- 1.9
44	20	8.3 28.8 +- 0.9; 4.3	22.0 +- 0.9; 5.2	19.9 +- 1.7
45	315	7.5 Damaged Dosimeter	No Net Data	21.0 +- 1.9
46	341	7.7 27.2 +- 0.8; 4.1	20.5 +- 0.9; 5.0	20.0 +- 1.3
47	355	1.0 28.0 +- 0.8; 4.2	21.2 +- 0.9; 5.1	18.3 +- 1.4

Transit Dose = 6.0 +- 0.4; 3.2

WOLF CREEK
For the period 930913-940203

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	19.9 +- 1.0	4
11.26 - 33.75 NNE	21.1 +- 0.9	3
33.76 - 56.25 NE	16.9 +- 1.2	2
56.26 - 78.75 ENE	17.7 +- 1.0	3
78.76 - 101.25 E	21.9 +- 0.6	2
101.26 - 123.75 ESE	19.3 +- 2.9	3
123.76 - 146.25 SE	19.6 +- 1.1	3
146.26 - 168.75 SSE	20.1 +- 2.2	2
168.76 - 191.25 S	21.5 +- 0.4	2
191.26 - 213.75 SSW	20.6 +- 2.6	2
213.76 - 236.25 SW	18.6 +- 2.8	3
236.26 - 258.75 WSW	20.3 +- 1.4	3
258.76 - 281.25 W	19.7 +- 2.4	5
281.26 - 303.75 WNW	18.3 +- 1.5	3
303.76 - 326.25 NW	20.0 +- 3.2	2
326.26 - 348.75 NNW	20.8 +- 0.8	4

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	19.7 +- 2.1	7
2 - 5	20.1 +- 1.6	25
> 5	19.1 +- 2.3	14
Upwind Control	No Data +- No Data	0

WOLF CREEK
TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	316	EOC ON TELEPHONE POLE
2	330	NORTH GATEPOST
3	360	WITH LICENSEE AIR SAMPLERS
4	355	NEAREST RESIDENCE
5	31	1ST POLE EAST(N. SIDE OF ROAD)
6	47	1ST UTILITY POLE S. OF STOP SIGN
7	70	CORNER FENCEPOST(W. SIDE OF ROAD)
8	90	GIFFORD'S RESIDENCE
9	111	WHITE HOUSE YARD
10	137	CO-LOCATED WITH KS AND KG&E
11	157	LOGAN CEMETARY FENCEPOST
12	184	ON ROAD TO DAM
13	213	CO-LOCATED WITH KS ON METER POLE
14	233	CO-LOCATED WITH KG&E NEAR WITHERS
15	248	FENCEPOST SW CORNER
16	278	KG&E PROPERTY FENCEPOST
17	270	RIVERSIDE EAST WORK AREA
18	263	RIVERSIDE WEST
19	257	POLE ON SW CORNER
20	280	DAM SITE PUBLIC USE AREA
21	298	NW CORNER OF NEW STRAWN
22	319	NE CRNR OF INTRSCT
23	332	NE CORNER OF INTERSECTION BY AIRPORT
24	19	NW CORNER OF INTERSECTION
25	35	NE CORNER OF INTERSECTION
26	67	CORNER POST SW OF T-INTERSECTION
27	88	NE OF INTERSECTION
28	110	CO-LOCATED WITH KG&E
29	128	S. SIDE OF FAS 10
30	112	WESTPHALIA-NEAR SCHOOL
31	127	ALICEVILLE
32	62	LEROY
33	153	POLE ON N. SIDE OF ROAD
34	174	SW CORNER OF INTERSECTION
35	197	POLE WEST OF INTERSECTION
36	224	BURLINGTON(COUNTY COURT HOUSE)
37	220	GRIDLEY CORNER(1ST AND MAIN)
38	253	OTTER CREEK CAMPGROUND
39	278	S. SIDE OF INTERSECTION
40	285	HARTFORD (CO-LOCATED W KS AND KG&E)
41	292	TRANSFORMER POLE(N. SIDE OF ROAD)
42	345	BETO JUNCTION W OF HIWAY 75
43	5	HALL'S SUMMIT
44	20	WAVERLY ON POLE W. OF SUNSET MANOR
45	315	SE CORNER OF T-INTERSECTION
46	341	FAS 1133 TO HALL'S SUMMIT
47	355	1ST POLE N. OF FENCE ON ACCESS ROAD

NRC TLD DOSES FOR WOLF CREEK AREA

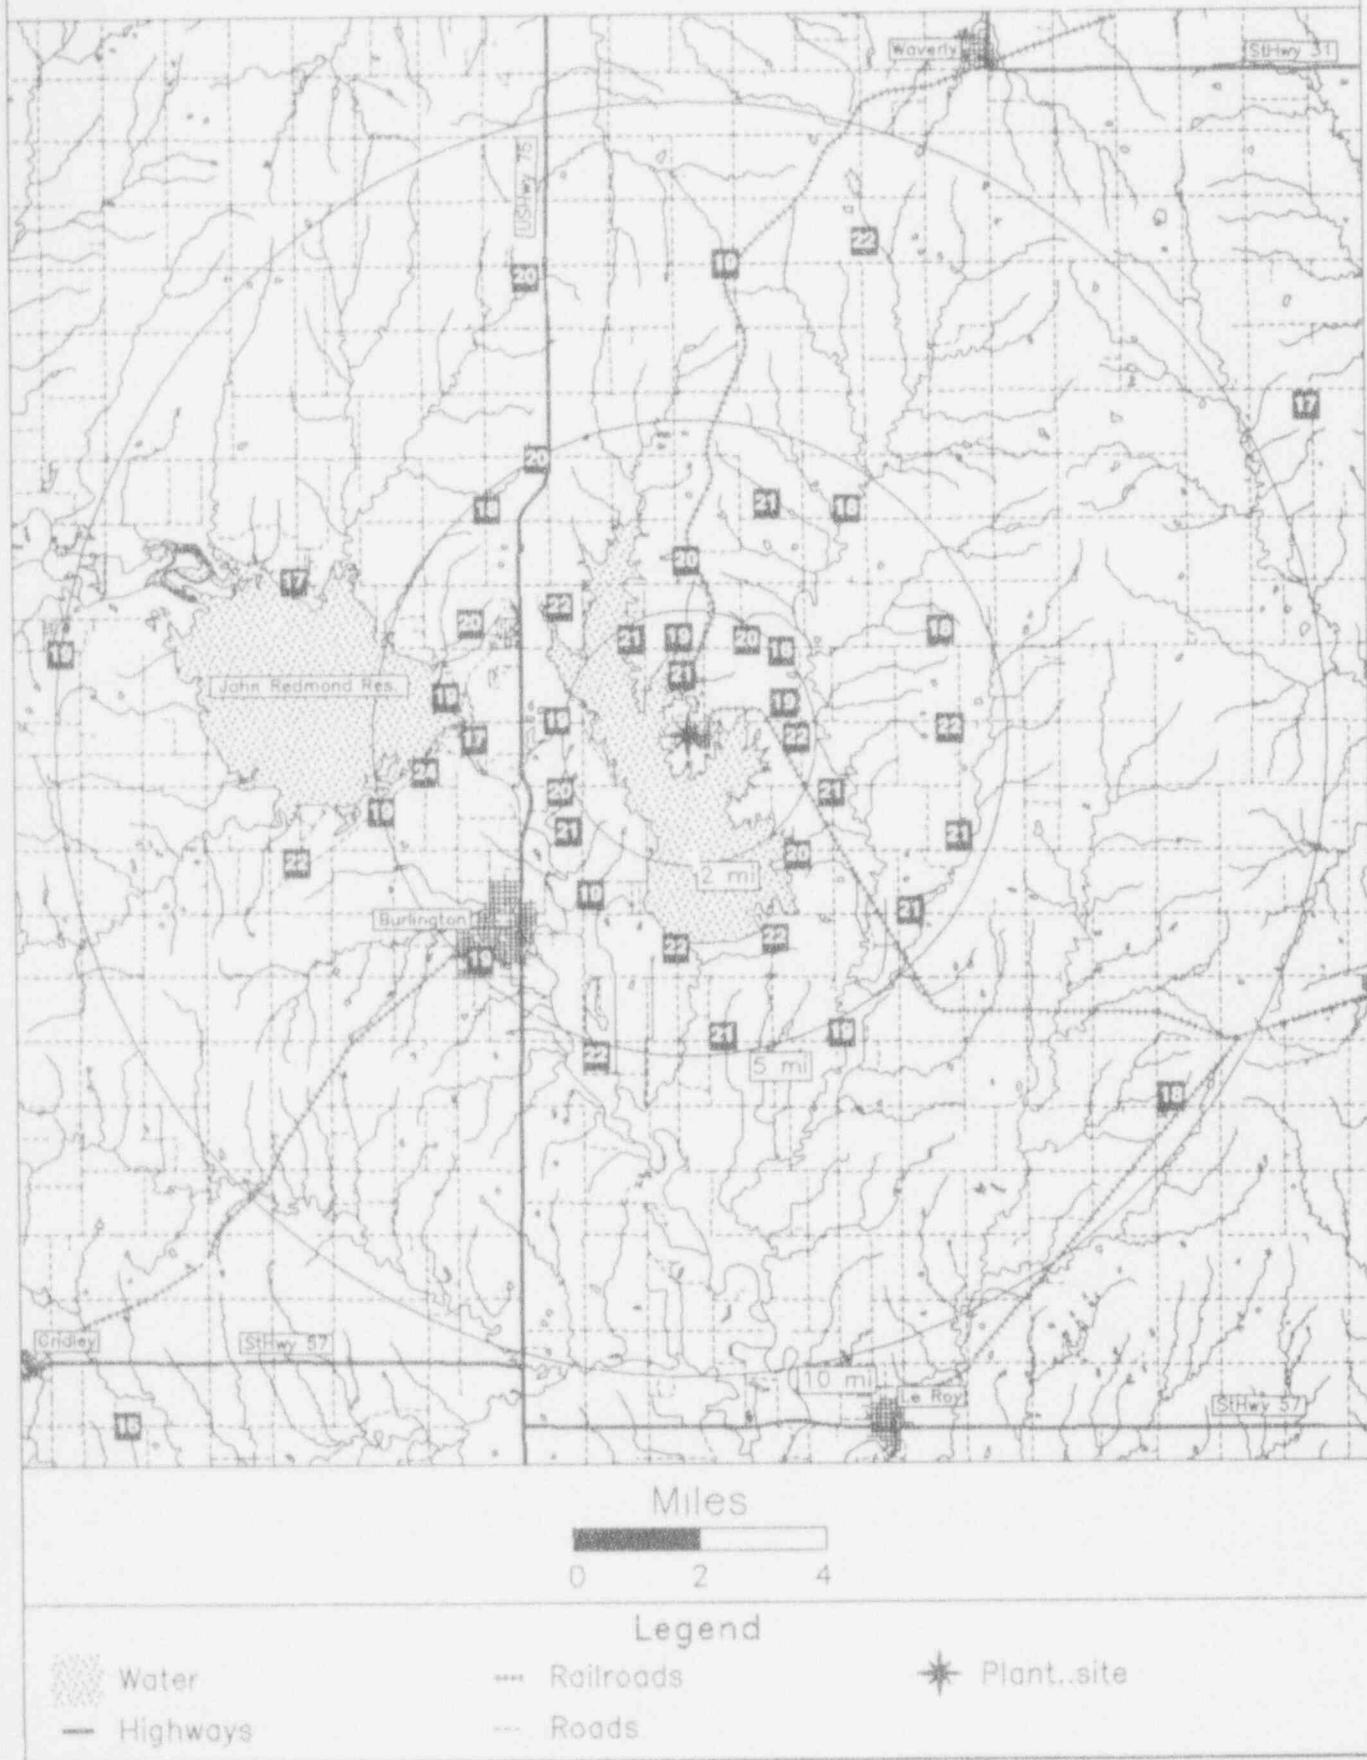

YANKEE ROWE

TLD Direct Radiation Environmental Monitoring
 For the period 930916-940201 139 Days
 Field Time: 86 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	0	0.8	23.2 +- 0.7; 3.5	17.0 +- 0.9; 4.9
2	265	14.0	22.5 +- 0.7; 3.4	16.2 +- 0.8; 4.8
3	137	12.0	22.7 +- 0.7; 3.4	16.4 +- 0.8; 4.8
5	85	2.2	21.9 +- 0.7; 3.3	15.6 +- 0.8; 4.7
6	118	2.6	22.1 +- 0.7; 3.3	15.8 +- 0.8; 4.8
7	137	2.1	24.7 +- 0.7; 3.7	18.5 +- 0.9; 5.1
8	153	1.7	22.6 +- 0.7; 3.4	16.4 +- 0.8; 4.8
9	176	1.1	22.4 +- 0.7; 3.4	16.1 +- 0.8; 4.8
10	203	0.5	23.2 +- 0.7; 3.5	17.0 +- 0.9; 4.9
11	219	0.6	23.4 +- 0.7; 3.5	17.2 +- 0.9; 4.9
12	239	1.1	22.5 +- 0.7; 3.4	16.2 +- 0.8; 4.8
13	272	1.8	23.6 +- 0.7; 3.5	17.3 +- 0.9; 4.9
14	292	1.3	26.0 +- 0.8; 3.9	19.8 +- 0.9; 5.2
15	315	1.6	25.2 +- 0.8; 3.8	19.0 +- 0.9; 5.1
16	348	1.4	24.2 +- 0.7; 3.6	17.9 +- 0.9; 5.0
17	358	2.8	24.4 +- 0.7; 3.7	18.2 +- 0.9; 5.0
18	21	2.8	21.5 +- 0.6; 3.2	15.1 +- 0.8; 4.7
19	43	5.8	22.5 +- 0.7; 3.4	16.2 +- 0.8; 4.8
20	75	6.0	25.5 +- 0.8; 3.8	19.4 +- 0.9; 5.2
21	98	6.0	21.5 +- 0.6; 3.2	15.2 +- 0.8; 4.7
22	104	5.2	20.3 +- 0.6; 3.0	13.9 +- 0.8; 4.6
23	133	5.7	22.1 +- 0.7; 3.3	15.8 +- 0.8; 4.8
24	157	7.5	19.9 +- 0.6; 3.0	13.5 +- 0.8; 4.5
25	184	6.3	23.4 +- 0.7; 3.5	17.2 +- 0.9; 4.9
27	225	5.9	23.2 +- 0.7; 3.5	16.9 +- 0.9; 4.9
29	269	3.5	23.1 +- 0.7; 3.5	16.9 +- 0.9; 4.9
32	342	3.3	Missing Dosimeter	No Net Data
34	48	7.3	22.3 +- 0.7; 3.3	16.0 +- 0.8; 4.8
35	39	2.3	19.1 +- 0.6; 2.9	12.7 +- 0.7; 4.4
47	260	9.6	23.3 +- 0.7; 3.5	17.0 +- 0.9; 4.9
48	261	9.0	25.1 +- 0.8; 3.8	19.0 +- 0.9; 5.1

Transit Dose = 7.0 +- 0.4; 3.1

YANKEE ROWE
For the period 930916-940201

TLD Direct Radiation Environmental Monitoring


Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	17.6 +- 0.9	2
11.26 - 33.75 NNE	15.1 +- 0.0	1
33.76 - 56.25 NE	14.9 +- 2.0	3
56.26 - 78.75 ENE	19.4 +- 0.0	1
78.76 - 101.25 E	15.4 +- 0.3	2
101.26 - 123.75 ESE	14.9 +- 1.3	2
123.76 - 146.25 SE	16.9 +- 1.4	3
146.26 - 168.75 SSE	15.0 +- 2.0	2
168.76 - 191.25 S	16.6 +- 0.8	2
191.26 - 213.75 SSW	17.0 +- 0.0	1
213.76 - 236.25 SW	17.1 +- 0.1	2
236.26 - 258.75 WSW	16.2 +- 0.0	1
258.76 - 281.25 W	16.8 +- 0.6	3
281.26 - 303.75 WNW	19.8 +- 0.0	1
303.76 - 326.25 NW	19.0 +- 0.0	1
326.26 - 348.75 NNW	17.9 +- 0.0	1

Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	17.4 +- 1.2	10
2 - 5	16.1 +- 2.0	7
> 5	16.1 +- 1.6	11
Upwind Control	18.0 +- 1.4	2

YANKEE ROWE
TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	0 0.8	VT/MASS LINE-READSBORO ROAD
2	265 14.0	WILLIAMSTOWN SUBSTATION
3	137 12.0	CREAMERY AVE. (BUCKLAND)
5	85 2.2	WEST OF LEHURE'S ROAD
6	118 2.6	LEHURE'S & FORD HILL ROAD
7	137 2.1	FORD HILL & MIDDLETOWN ROADS
8	153 1.7	E. MILES RESIDENCE
9	176 1.1	MONROE HILL ROAD
10	203 0.5	MONROE HILL ROAD
11	219 0.6	MONROE HILL ROAD
12	239 1.1	MONROE BRIDGE
13	272 1.8	MAIN ROAD & DAVIS ROAD
14	292 1.3	MAIN ROAD
15	315 1.6	MAIN ROAD
16	348 1.4	BOSLEY HILL ROAD
17	358 2.8	VT. RT. 100
18	21 2.8	VT. RT. 100 & POTTERS ROAD
19	43 5.8	VT. RT. 100
20	75 6.0	VT. RT. 8A
21	98 6.0	MASS. RT. 8A
22	104 5.2	MASS. RT. 8A
23	133 5.7	MASS. RT. 8A & DELL ROAD
24	157 7.5	MASS. RTS. 8A & 2
25	184 6.3	COLD RIVER STATE PARK
27	225 5.9	RT. 2 & CHURCH ROAD
29	269 3.5	NORTH ROAD
32	342 3.3	READSBORO FIREHOUSE
34	48 7.3	JACKSONVILLE
35	39 2.3	POTTERS ROAD
47	260 9.6	NORTH ADAMS
48	261 9.0	NORTH ADAMS HOSPITAL

NRC TLD DOSES FOR YANKEE ROWE AREA

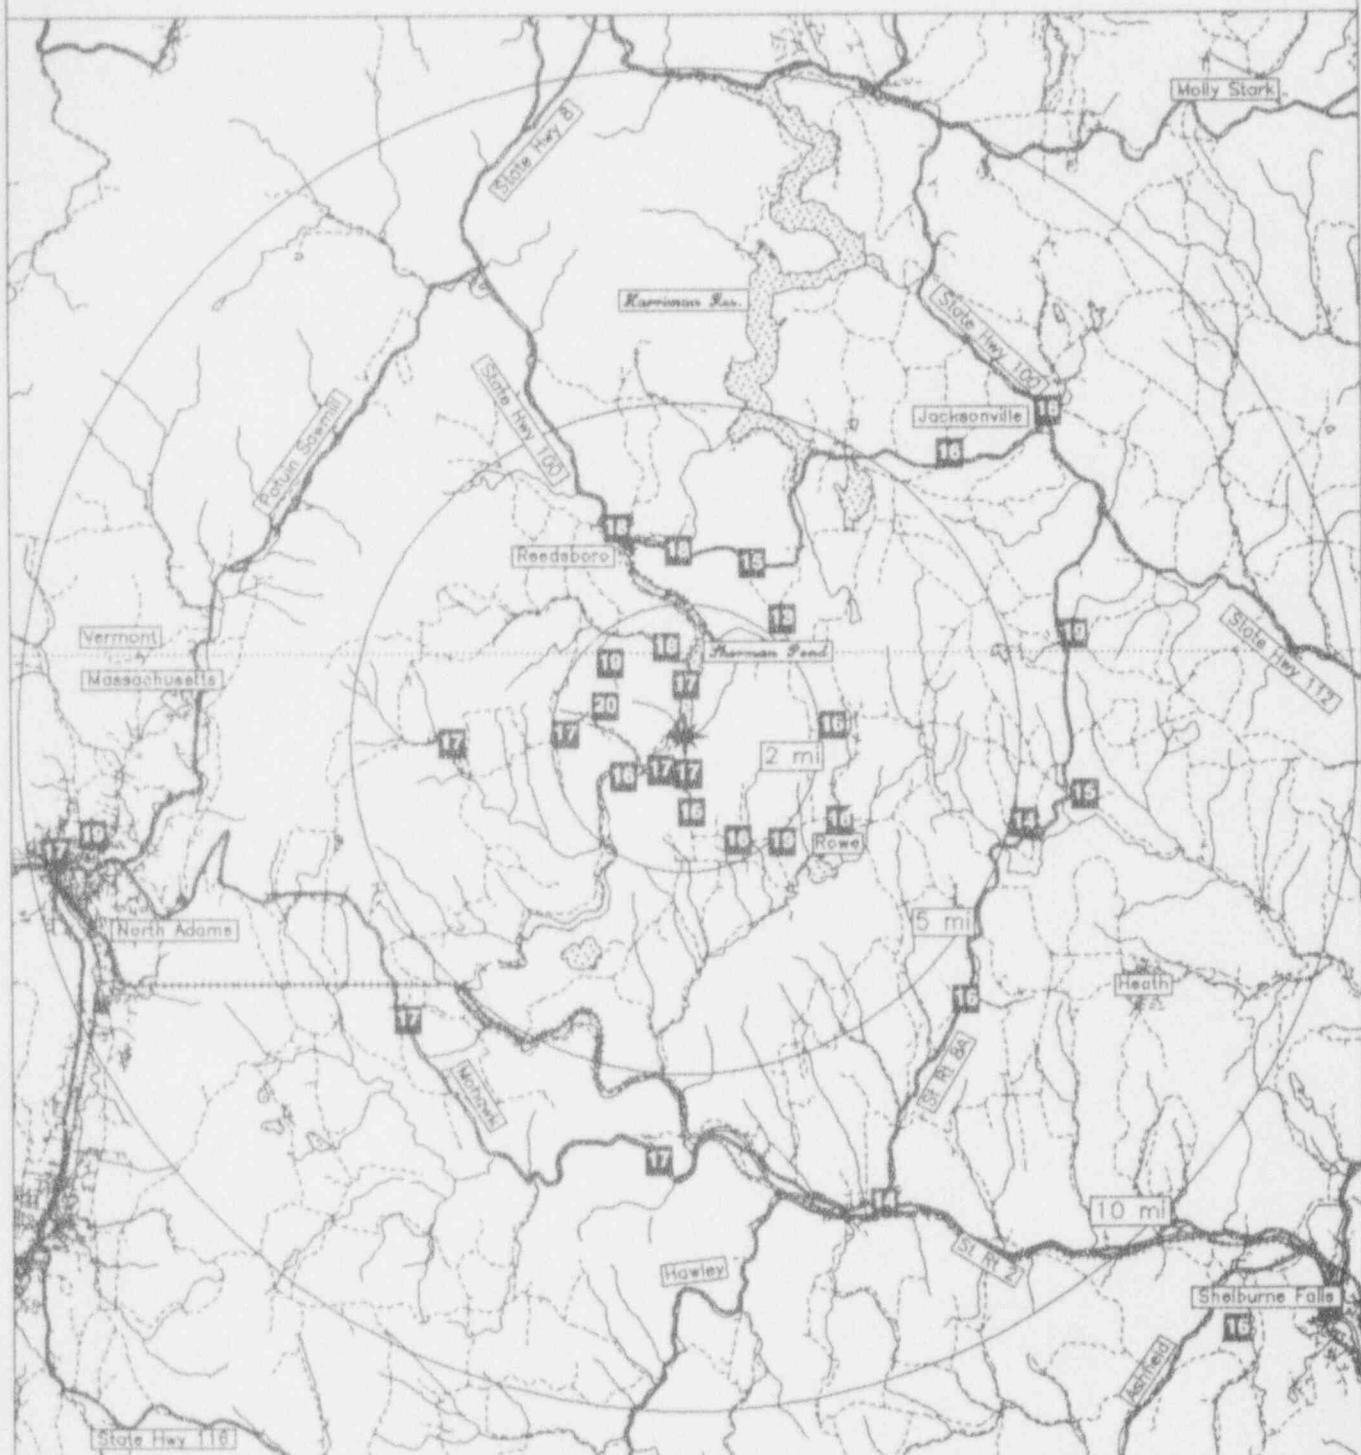

Miles

0 2 4

Legend

- Water
- Highways

- +++ Railroads
- Roads



ZION

TLD Direct Radiation Environmental Monitoring
 For the period 930913-940201 142 Days
 Field Time: 99 Days

NRC Sta	Location Azimuth/Dist (Deg)/(Mi)	Gross Exposure (mR) +-Rdm; Tot.	Net Exposure Rate (mR/Std. Qtr.) +-Rdm; Tot.	Hist. Range Net Exp Rate +-1 Std Dev
1	310	0.8	18.4 +- 0.6; 2.8	13.2 +- 0.6; 3.8
2	192	1.0	17.8 +- 0.5; 2.7	12.7 +- 0.6; 3.8
3	187	1.9	18.0 +- 0.5; 2.7	12.8 +- 0.6; 3.8
4	219	2.4	22.2 +- 0.7; 3.3	16.7 +- 0.7; 4.2
5	257	1.8	Missing Dosimeter	No Net Data
6	250	1.2	20.4 +- 0.6; 3.1	15.0 +- 0.6; 4.0
7	293	1.6	21.6 +- 0.6; 3.2	16.1 +- 0.7; 4.1
8	310	1.8	18.9 +- 0.6; 2.8	13.6 +- 0.6; 3.9
9	343	2.6	19.5 +- 0.6; 2.9	14.2 +- 0.6; 3.9
10	356	4.5	19.5 +- 0.6; 2.9	14.2 +- 0.6; 3.9
11	337	4.5	21.4 +- 0.6; 3.2	15.9 +- 0.7; 4.1
12	310	4.0	24.0 +- 0.7; 3.6	18.3 +- 0.7; 4.4
13	293	3.5	24.9 +- 0.7; 3.7	19.1 +- 0.8; 4.5
14	280	4.5	23.5 +- 0.7; 3.5	17.8 +- 0.7; 4.3
15	232	3.2	21.7 +- 0.7; 3.3	16.2 +- 0.7; 4.1
16	220	3.5	23.3 +- 0.7; 3.5	17.6 +- 0.7; 4.3
17	198	4.5	20.9 +- 0.6; 3.1	15.4 +- 0.7; 4.1
18	206	2.8	19.6 +- 0.6; 2.9	14.2 +- 0.6; 3.9
19	327	1.7	20.1 +- 0.6; 3.0	14.7 +- 0.6; 4.0
20	197	15.0	24.3 +- 0.7; 3.7	18.6 +- 0.7; 4.4
21	352	7.9	20.3 +- 0.6; 3.0	14.9 +- 0.6; 4.0
22	348	9.3	19.2 +- 0.6; 2.9	13.9 +- 0.6; 3.9
23	336	8.5	22.4 +- 0.7; 3.4	16.8 +- 0.7; 4.2
24	314	5.8	23.3 +- 0.7; 3.5	17.6 +- 0.7; 4.3
25	220	6.3	21.6 +- 0.6; 3.2	16.1 +- 0.7; 4.1
26	195	8.0	20.5 +- 0.6; 3.1	15.1 +- 0.6; 4.0
28	197	15.0	24.0 +- 0.7; 3.6	18.3 +- 0.7; 4.4
30	320	9.8	22.6 +- 0.7; 3.4	17.0 +- 0.7; 4.2
31	229	8.0	20.5 +- 0.6; 3.1	15.1 +- 0.6; 4.0
32	193	15.0	23.6 +- 0.7; 3.5	17.9 +- 0.7; 4.3

Transit Dose = 3.9 +- 0.4; 3.2

ZION

For the period 930913-940201

TLD Direct Radiation Environmental Monitoring

Azimuth (degrees)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
348.76 - 11.25 N	14.5 +- 0.5	2
11.26 - 33.75 NNE	No Data +- No Data	0
33.76 - 56.25 NE	No Data +- No Data	0
56.26 - 78.75 ENE	No Data +- No Data	0
78.76 - 101.25 E	No Data +- No Data	0
101.26 - 123.75 ESE	No Data +- No Data	0
123.76 - 146.25 SE	No Data +- No Data	0
146.26 - 168.75 SSE	No Data +- No Data	0
168.76 - 191.25 S	12.8 +- 0.0	1
191.26 - 213.75 SSW	14.4 +- 1.2	4
213.76 - 236.25 SW	16.3 +- 0.9	5
236.26 - 258.75 WSW	15.0 +- 0.0	1
258.76 - 281.25 W	17.8 +- 0.0	1
281.26 - 303.75 WNW	17.6 +- 2.1	2
303.76 - 326.25 NW	15.9 +- 2.4	5
326.26 - 348.75 NNW	15.1 +- 1.2	5


Distance From Reactor (miles)	Ave. Exposure Rate (mR/Std.Qtr.) +- Std.Dev.	Number In Group
0 - 2	14.0 +- 1.3	7
2 - 5	16.3 +- 1.7	11
> 5	15.8 +- 1.3	8
Upwind Control	18.3 +- 0.3	3

ZION

TLD Direct Radiation Environmental Monitoring

NRC Station	Location Azimuth / Distance Degree / Mile	Description
1	310	SHILOH BLVD. NEAR RECYCLING CENTER
2	192	ILLINOIS BEACH STATE PARK N. PARKING AREA
3	187	ILLINOIS BEACH STATE PARK AT NATURE CENTER
4	219	BEACH RD. & NORTH AVE.
5	257	ELMWOOD SCHOOL ON 31ST ST.
6	250	BEHIND CITY HALL (29TH ST.)
7	293	23RD & ESHCOL
8	310	JUST BEFORE 17TH & SHERIDAN RD.
9	343	OLD WINTHROP HARBOR PUBLIC WORKS BLDG (WISCONSIN) END OF 116TH ST.
10	356	TOBIN - 116TH ST. & 22ND AVE.
11	337	ZION FREEDOM CHAPEL ON KENOSHA RD.
12	310	KENOSHA RD. & HWY. 173
13	293	21ST ST. & FOREST VIEW RD.
14	280	BEACH ROAD AT LEWIS AVE.
15	232	1521 YORK HOUSE ROAD
16	220	SUBSTATION AT GREENWOOD AVE & SHERIDAN RD.
17	198	YORK HOUSE RD. & SHERIDAN
18	206	LAKE CNTY WATER TREATMENT PLANT ON 17TH ST. E
19	327	ILLINOIS STATE RT. 60
20	197	SUBSTATION - 7TH AVE. & 80TH ST.
21	352	MARTIN LUTHER KING DRIVE
22	348	75TH ST. AT RR CROSSING
23	336	RT 31 & COUNTY M/L
24	314	RT. 131 & 132
25	220	SUBSTATION AT 12TH & GREENFIELD ST.
26	195	ILLINOIS STATE RT. 60
28	197	PLEASANT PRAIRIE SCHOOL ON COUNTY-C (WISC)
30	320	WARREN TWP HIGH SCHOOL ON O'PLAINE RD. (#487)
31	229	SAUNDERS RD AT IL-60 NEAR I-94
32	193	

NRC TLD DOSES FOR ZION AREA

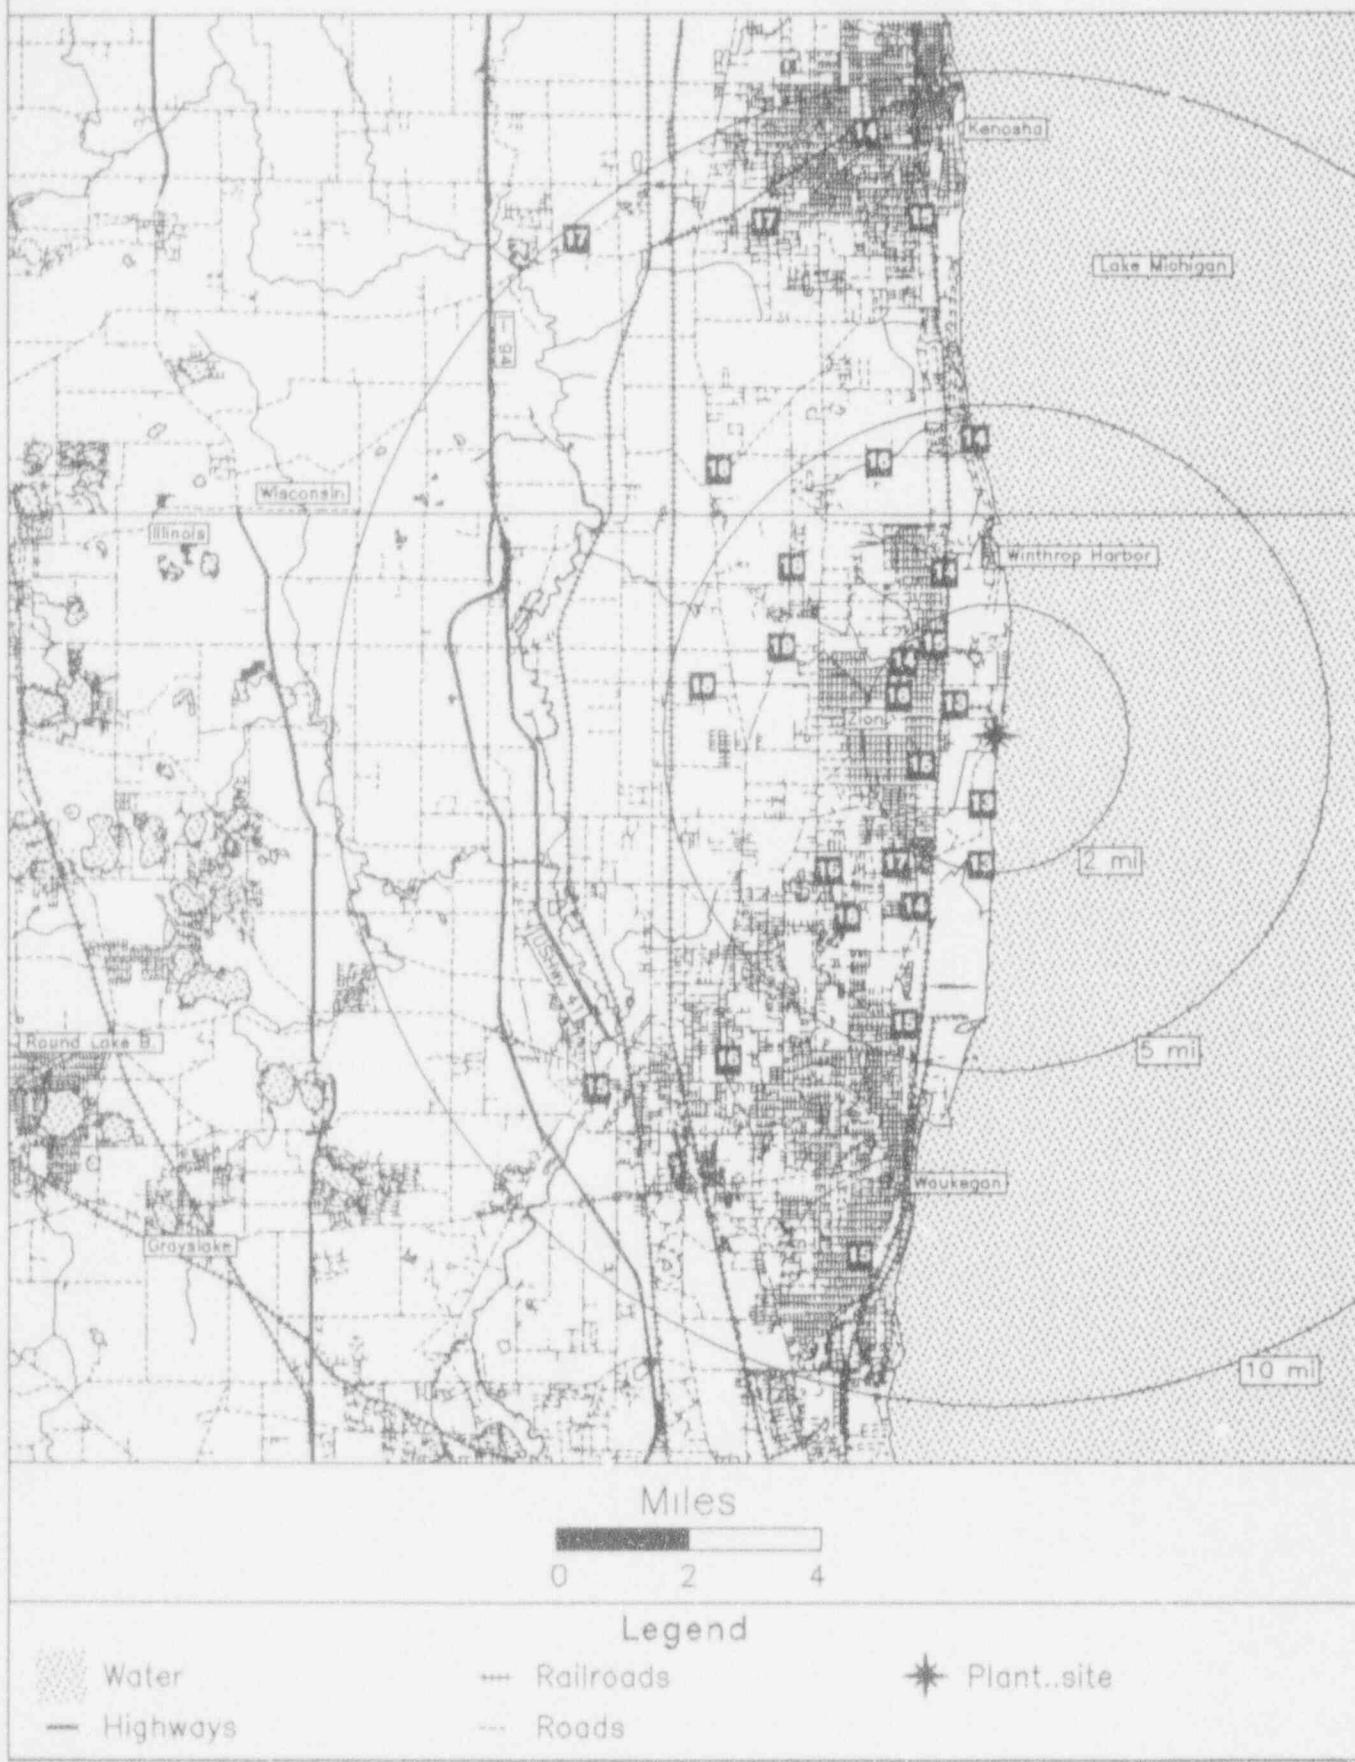

BIBLIOGRAPHIC DATA SHEET

(See instructions on the reverse)

1. REPORT NUMBER
*(Assigned by NRC. Add Vol., Supp., Rev.,
and Addendum Numbers, if any.)*

NUREG-0837

Vol. 13, No. 4

2. TITLE AND SUBTITLE

NRC TLD Direct Radiation Monitoring Network
Progress Report (October - December 1993)

3. DATE REPORT PUBLISHED

MONTH YEAR

March 1994

4. FIN OR GRANT NUMBER

5. AUTHOR(S)

R. Struckmeyer

6. TYPE OF REPORT

Quarterly

7. PERIOD COVERED *(Inclusive Dates)*

October-December 1993

8. PERFORMING ORGANIZATION – NAME AND ADDRESS *(If NRC, provide Division, Office or Region, U.S. Nuclear Regulatory Commission, and mailing address; if contractor, provide name and mailing address.)*

Region I
U.S. Nuclear Regulatory Commission
King of Prussia, PA 19406

9. SPONSORING ORGANIZATION – NAME AND ADDRESS *(If NRC, type "Same as above"; if contractor, provide NRC Division, Office or Region, U.S. Nuclear Regulatory Commission, and mailing address.)*

Same as 8. above

10. SUPPLEMENTARY NOTES

11. ABSTRACT *(200 words or less)*

This report provides the status and results of the NRC Thermoluminescent Dosimeter (TLD) Direct Radiation Monitoring Network. It presents the radiation levels measured in the vicinity of NRC licensed facilities throughout the country for the fourth quarter of 1993.

12. KEY WORDS/DESCRIPTIONS *(List words or phrases that will assist researchers in locating the report.)*

Thermoluminescent Dosimeter (TLD) Direct Radiation Monitoring
Network

ambient radiation levels

13. AVAILABILITY STATEMENT

Unlimited

14. SECURITY CLASSIFICATION

(This Page)


Unclassified

(This Report)

Unclassified

15. NUMBER OF PAGES

16. PRICE

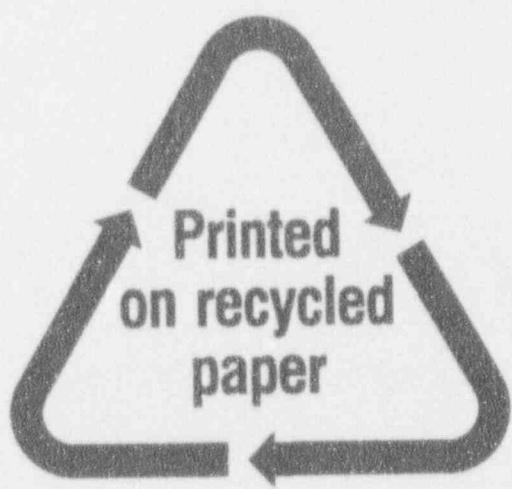

Federal Recycling Program

UNITED STATES
NUCLEAR REGULATORY COMMISSION
WASHINGTON, D.C. 20555-0001

SPECIAL FOURTH-CLASS RATE
POSTAGE AND FEES PAID
USNRC
PERMIT NO. G-67

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE, \$300

123555139571 1 JANINE
105 28010406
TELETYPE & CIRCUITATION SVCS
212-954-7400
WASHINGTON DC 20555