

08/23/1999 - Federal Register Notice: *Denial of Petition for Rulemaking (PRM-50-65) by the Nuclear Information and Resource Service* [available in [TXT](#) or [PDF](#) format]

08/23/1999 - Federal Register Notice: *Denial of Petition for Rulemaking (PRM-50-66) by the Nuclear Information and Resource Service* [available in [TXT](#) or [PDF](#) format]

08/23/1999 - Federal Register Notice: *Denial of Petition for Rulemaking (PRM-50-67) by the Nuclear Information and Resource Service* [available in [TXT](#) or [PDF](#) format]

07/30/1999 - Federal Register Notice: *Interim Enforcement Policy Regarding Enforcement Discretion for Nuclear Power Plants During the Year 2000 Transition* [available in [TXT](#) or [PDF](#) format]

01/25/1999 - Federal Register Notice: *Petition for Rulemaking (PRM-50-65) by the Nuclear Information and Resource Service* [available in [TXT](#) or [PDF](#) format]

01/25/1999 - Federal Register Notice: *Petition for Rulemaking (PRM-50-66) by the Nuclear Information and Resource Service* [available in [TXT](#) or [PDF](#) format]

01/25/1999 - Federal Register Notice: *Petition for Rulemaking (PRM-50-67) by the Nuclear Information and Resource Service* [available in [TXT](#) or [PDF](#) format]

01/20/1999 - Federal Register Notice of Availability and Request for Comment: *NRC Contingency Plan for the Year 2000 Issue* [available in [TXT](#) or [PDF](#) format]

05/19/1998 - Federal Register Notice: *Year 2000 Readiness of Computer Systems at Nuclear Power Plants* [available in [TXT](#) or [PDF](#) format]

01/29/1998 - Federal Register Notice: *Proposed Generic Communication on Year 2000 Readiness of Computer Systems at Nuclear Power Plants* [available in [TXT](#) or [PDF](#) format]

[Federal Register: August 23, 1999 (Volume 64, Number 162)]

[Proposed Rules]

[Page 45900-45907]

From the Federal Register Online via GPO Access [wais.access.gpo.gov]

[DOCID: **fr23au99-20**]

=====
Proposed Rules

Federal Register

This section of the FEDERAL REGISTER contains notices to the public of the proposed issuance of rules and regulations. The purpose of these notices is to give interested persons an opportunity to participate in the rule making prior to the adoption of the final rules.

=====

[[Page 45900]]

NUCLEAR REGULATORY COMMISSION

10 CFR Parts 30, 40, 50, and 70

[Docket No. PRM-50-65]

Nuclear Information and Resource Service; Petition for Rulemaking Denial

AGENCY: Nuclear Regulatory Commission.

ACTION: Petition for rulemaking; denial.

SUMMARY: The Nuclear Regulatory Commission (NRC) is denying a petition for rulemaking (PRM-50-65) from the Nuclear Information and Resource Service (NIRS). The petitioner requested that NRC amend its regulations to require the shutdown of nuclear facilities that are not compliant with date-sensitive, computer-related issues regarding the Year 2000 (Y2K) issue. The petitioner requested that NRC take this action to

ensure that Y2K issues will not cause the failure of nuclear safety systems and thereby pose a threat to public health and safety. NRC is denying the petition because the Commission has determined that the actions taken by licensees to implement a systematic and structured facility-specific Y2K readiness program and NRC's oversight of the licensees' implementation of these Y2K readiness programs provide reasonable assurance of adequate protection to public health and safety.

ADDRESSES: Copies of the petition for rulemaking, the public comments received, and NRC's letters to the petitioners are available for public inspection or copying in the NRC Public Document Room, 2120 L Street, NW. (Lower Level), Washington, DC, as well as on NRC's rulemaking website at <http://ruleforum.llnl.gov>.

FOR FURTHER INFORMATION CONTACT: Matthew Chiramal, Office of Nuclear Reactor Regulation, U.S. Nuclear Regulatory Commission, Washington, DC 20555-0001, telephone 301-415-2845, E-mail address <mxc@nrc.gov>, or Gary W. Purdy, Office of Nuclear Material Safety and Safeguards, U.S. Nuclear Regulatory Commission, Washington, DC 20555-0001, telephone 301-415-7897, E-mail address <gwpl@nrc.gov>.

SUPPLEMENTARY INFORMATION:

Background

NRC received three related petitions for rulemaking (PRM-50-65, PRM-50-66, and PRM-50-67), each dated December 10, 1998, submitted by NIRS concerning various aspects of Y2K issues and nuclear safety. This petition (PRM-50-65) requested that NRC adopt regulations that would require facilities licensed by NRC under 10 CFR Parts 30, 40, 50, and 70 to be Y2K compliant. The second petition (PRM-50-66) requested that NRC adopt regulations that would require facilities licensed by NRC under 10 CFR Part 50 to develop and implement adequate contingency and emergency plans to address potential system failures. The third petition (PRM-50-67) requested that NRC adopt regulations that would require facilities licensed by NRC under 10 CFR Parts 50 and 70 to provide reliable sources of back-up power. Because of the nature of these petitions and the date-specific issues they address, the petitioner requested that the petitions be addressed on an expedited schedule.

On January 25, 1999, NRC published a notice of receipt of a petition for rulemaking in the Federal Register (64 FR 3789). It was available on NRC's rulemaking website and in the NRC Public Document Room. The notice of receipt of a petition for rulemaking invited interested persons to submit comments by February 24, 1999.

The Petition

The petitioner requested that NRC adopt the following text as a rule:

Any and all facilities licensed by the Nuclear Regulatory Commission under 10 CFR Parts 30, 40, 50, and 70 shall be closed by 12 pm Eastern Standard Time, December 1, 1999, unless and until each facility has: (a) fully and comprehensively examined all computer systems, embedded chips, and other electronic equipment that may be date-sensitive to ensure that all such systems that may be relevant to safety are Y2K compliant; (b) repaired, modified, and/or replaced all such systems that are not found to be Y2K compliant; (c) made available to the public all information related to the examination and repair, modification and/or replacement of all such systems; (d) determined, through full-scale testing, that all repairs, modifications, and/or replacements of all such systems are, in fact, Y2K compliant.

The petitioner noted that in NRC Generic Letter (GL) 98-01, ``Year 2000 Readiness of Computer Systems at Nuclear Power Plants,'' dated May 11, 1998, the NRC has recognized the potential for date-related problems that may affect a system or application (the Y2K problem). These potential problems include not representing the year properly, not recognizing leap years, and improper date calculations. These problems could result in the inability of computer systems to operate or to function properly. The petitioner stated that the Y2K problem could potentially interfere with the proper operation of computer systems, microprocessor-based hardware, and software or databases relied on at nuclear power plants. Further, the petitioner asserted that the Y2K problem could result in a plant trip and subsequent complications in tracking post-shutdown plant status and recovery as a result of a loss of emergency data collection. Additionally, the petitioner is also concerned that power grids providing offsite power to nuclear stations could be affected to the extent that localized and widespread grid failures could occur.

The petitioner acknowledged that NRC has recognized the potential safety and environmental problems that could result if date-sensitive electronic systems fail to operate or provide false information. The petitioner asserted that NRC has required its licensees of reactor and major fuel cycle facilities to report by July 1, 1999, on their programs to ensure compliance with Y2K issues. In addition, the petitioner asserted that NRC has not made explicit how it will define compliance nor what it plans to do for licensees of facilities that cannot prove compliance. In the petitioner's suggested regulatory text, NIRS defined compliance with Y2K issues as evaluation of all potential problems that may be safety-related, repair of all such problems, and full-scale testing of all solutions. The petitioner's proposed regulation would also require full public disclosure of all evaluation,

repair, and testing data so that the information may be examined by independent experts and the public. Finally, the petitioner's proposed regulation would make it clear that nuclear facilities will be closed

[[Page 45901]]

until they can demonstrate full compliance with Y2K issues.

The petitioner concluded by stating that NRC is obligated to act decisively to protect public health and safety and the environment. NIRS stated that anything short of the suggested approach in the petition is insufficient to fulfill this obligation and that NRC should adopt the suggested regulation as soon as possible.

Public Comments on the Petition

In response to the petition, NRC received 70 comment letters, including 1 letter signed by 25 individuals from the State of Michigan, 3 letters from industry groups, 10 letters from utilities, 13 letters from private organizations, and 43 letters from private citizens.

Fifty-four letters supported the petition, 40 of which were from private citizens, 13 were from private organizations, and 1 that was signed by 25 individuals. The comments supporting the petition addressed concerns related to avoiding the occurrence of a catastrophic nuclear accident, the reasonableness of the petitioner's request, and opined that any uncertainty is too great for the nuclear industry.

Sixteen letters opposed the petition, of which 3 were from private citizens, 3 were from associated industries, and 10 were from utilities. The comments opposing the petition stated that the nuclear power industry has taken a coordinated approach to Y2K readiness, nuclear power plant licensees are implementing a structured Y2K program, NRC Y2K initiatives are underway, NRC staff is monitoring licensee activities, and current regulations and license conditions are adequate to address potential Y2K computer issues.

In some of the letters supporting the petition, the authors included the following additional comments that provide information or request action that was not contained in the petition. These comments noted:

1. The date proposed in the petition, December 1, 1999, to shut down all non-Y2K compliant nuclear power plants should be moved up 1 to 6 months before the year 2000. The reasons given were to allow sufficient time to shut down and to provide additional safety.

2. Power grid failure would not allow controlled shutdown of the plant and plants could experience problems like the Russians. The Y2K problem could increase the chance of a core melt.

3. The problem of ``embedded systems,`` microchips, microprocessors, and such systems-within-systems are difficult to identify and the effects of their multiple failures are poorly understood, especially in the U.S. power grid.

4. The audits conducted by NRC staff are too few.

These comments are addressed specifically in the discussion of ``Reasons for Denial.''

Reasons for Denial

The NRC is denying the NIRS petition because the NRC has determined that: (1) the actions taken by licensees to implement a systematic and structured facility-specific Y2K readiness program; and (2) NRC's oversight of licensees' implementation of these Y2K readiness programs together constitute an effective process for addressing Y2K issues such that there will continue to be reasonable assurance of adequate protection of public health and safety. NIRS has not presented any information (and no public comments have been received) that demonstrates that: (1) the licensees' activities are fundamentally incapable of effectively addressing Y2K issues in a timely fashion; (2) licensees are not adequately implementing the Y2K readiness programs; (3) NRC's inspection, audit, and oversight activities are fundamentally incapable of providing adequate regulatory control with respect to licensee implementation of Y2K readiness programs; and (4) the NRC is not effectively implementing its inspection, audit, and oversight activities with respect to Y2K issues. Finally, NIRS has not provided any basis why the NRC's current regulatory approach, which retains the regulatory authority to order licensees to discontinue or modify their licensed activities if the NRC finds that reasonable assurance of adequate protection to public health and safety will not be provided because of Y2K issues, will be inadequate in view of the 6-month time period between July 1, 1999, when licensees are required to inform the NRC of the status of their Y2K remediation activities and the December 31, 1999, date, when Y2K-induced problems are most likely to begin occurring.

Parts (a), (b), and (d) of the NIRS proposed rule are addressed below in Sections I, II, III, IV, and V for Part 50 operating nuclear power plants, Part 50 non-power reactors, Part 50 decommissioning nuclear power plants, major licensees under Parts 40 and 70, and Part 30 and minor Parts 40 and 70 licensees, respectively. Part (c) of NIRS' proposed rule, concerning public access to Y2K information, is addressed for all types of licensees in Section VI.

I. Part 50 Operating Nuclear Power Plant Licensees

A. Industry and NRC Activities Addressing Y2K

To alert nuclear facility licensees to the Y2K problem, NRC issued Information Notice (IN) 96-70, ``Year 2000 Effect on Computer System Software,' ' on December 24, 1996. IN 96-70 described the potential problems that nuclear power plant computer systems and software may encounter as a result of the change to the new century and how the Y2K

issue may affect NRC licensees. IN 96-70 encouraged licensees to examine their uses of computer systems and software well before the year 2000 and suggested that licensees consider appropriate actions for examining and evaluating their computer systems for Y2K vulnerabilities.

In 1997, the nuclear industry began to assess the Y2K challenge and work with key Federal agencies to help nuclear power plant operators prepare for continued safe operations at the start of the year 2000. In July 1997, the Nuclear Utilities Software Management Group (NUSMG), a nuclear industry working group, conducted the first industry-wide workshop on Y2K readiness.

In October 1997, the Nuclear Energy Institute (NEI) and NUSMG issued a Y2K program plan guidance document, NEI/NUSMG 97-07, ``Nuclear Utility Year 2000 Readiness,'' to all U.S. nuclear power plant licensees. This document provides a step-by-step method to identify, test, and repair potential Y2K computer problems and contains detailed procedures and checklists for resolving Y2K issues, based on the best utility practices.

NEI/NUSMG 97-07 presented a strategy for developing and implementing a nuclear utility Y2K program. The strategy recognizes management, implementation, quality assurance (QA) measures, regulatory considerations, and documentation as the fundamental elements of a successful Y2K project. The document contains examples currently in use by licensees and also recommends that the Y2K program be administered using standard project management techniques. The recommended components for management planning are management awareness, sponsorship, project leadership, project objectives, the project management team, the management plan, project reports, interfaces, resources, oversight, and QA. The suggested phases of implementation are awareness, initial assessment (which includes inventory, categorization, classification,

[[Page 45902]]

prioritization, and analysis of initial assessment), detailed assessment (including vendor evaluation, utility-owned or utility-supported software evaluation, interface evaluation, and remedial planning), remediation, Y2K testing and validation, and notification.

Y2K testing is used both as an investigative tool to examine systems and components to identify Y2K problems and as a validation tool to confirm that the corrective actions have eliminated the Y2K problem. Y2K testing in support of evaluation efforts to determine whether a Y2K problem is present is performed during detailed assessments. Systems and components will then be repaired or replaced in a process known as ``remediation.'' Y2K testing subsequent to remediation is performed to determine whether the remediation efforts have eliminated the Y2K problem and no unintended functions are introduced. Y2K testing may be performed at several levels:

- <bullet> Unit testing, which focuses on functional and compliance testing of a single application or software module;

- <bullet> Integration testing, which tests the integration of related software modules and applications; and

- <bullet> System testing, which tests the hardware and software components of a system.

For systems, components, and equipment classified as safety-related or critical to operations, the Y2K remediation activities include Y2K testing. On one end of the spectrum, there are the stand-alone, date-aware, microprocessor-based components that do not communicate digital information to any other devices. Properly performed bench testing of these devices, by the licensee or the vendor, coupled with software/firmware revision-level verification of the field devices as required, is adequate to establish their Y2K status. Repeating this test in the field as part of a plant-wide integrated test will not add any additional benefits related to system Y2K readiness. On the other end of the spectrum, the most highly complex systems, such as distributed control systems, may require in-plant testing of the remediated system. This testing may include a large portion of the plant equipment. However, even in this case, the maximum bounds of the test would involve the individual system being tested and the other devices and systems with which it communicates digital/date-related information.

NEI/NUSMG 97-07 specifies the QA measures that will apply to the activities in NEI/NUSMG 97-07 that apply primarily to project management and implementation. Documentation of Y2K program activities and results includes documentation requirements, project management documentation, vendor documentation, inventory lists, checklists for initial and detailed assessments, and record retention. NEI/NUSMG 97-07 also contains examples of various plans and checklists as appendices that may be used or modified to meet the licensee's specific needs and/or requirements.

After issuing NEI/NUSMG 97-07, NEI conducted workshops and other means of sharing the experiences on the use of the document. In November 1997, NEI and NUSMG conducted the first in a series of industry-wide workshops on Y2K issues for project managers in charge of ensuring Y2K readiness at all operating nuclear power plants. In December 1997, NEI created an on-line bulletin board to share technical information and experiences related to testing and repairing computers and equipment.

In January 1998, the NRC issued a draft generic letter for public comment which proposed: (1) that licensees of operating nuclear power plants be required to provide certain information regarding their programs that address the Y2K problem in computer systems at their facilities; and (2) to endorse the guidance in NEI/NUSMG 97-07 as one possible approach in implementing a plant-specific Y2K readiness program, if augmented in the area of risk management, contingency planning, and remediation of embedded systems [Federal Register (63 FR 4498)]. In the absence of adverse comment on the adequacy of the

guidance in NEI/NUSMG 97-07, the NRC issued GL 98-01 on May 11, 1998 [Federal Register (63 FR 27607)]. In August 1998, NEI issued an industry document, NEI/NUSMG 98-07, ``Nuclear Utility Year 2000 Readiness Contingency Planning,' that provided additional guidance for establishing a plant-specific contingency planning process. NEI/NUSMG 98-07 addressed management controls, preparation of individual contingency plans, and development of an integrated contingency plan that allows the licensee to manage internal and external risks associated with Y2K-induced events. External events that should be considered for facility-specific contingency planning include electric grid/transmission/distribution system events, such as loss of off-site power, grid instability and voltage fluctuations, load fluctuations and loss of grid control systems; loss of emergency plan equipment and services; loss of essential services; and depletion of consumables. NRC considers the guidance in NEI/NUSMG 98-07, when properly implemented, as an acceptable approach for licensees to mitigate and manage Y2K-induced events that could occur on Y2K-critical dates. In GL 98-01, NRC required all operating nuclear power plant licensees to submit written responses regarding their facility-specific Y2K readiness program in order to confirm that they are addressing the Y2K problem effectively. All licensees have responded to GL 98-01, stating that they have adopted a plant-specific Y2K readiness program based on the guidance of NEI/NUSMG 97-07, and the scope of the program includes identifying and, where appropriate, remediating, embedded systems, and provides for risk management and the development of contingency plans.

GL 98-01 ¹ also requests a written response, no later than July 1, 1999, confirming that these facilities are Y2K ready with regard to compliance with the terms and conditions of their license and NRC regulations. Licensees that are not Y2K ready by July 1, 1999, must provide a status report and schedule for the remaining work to ensure timely Y2K readiness. By July 1, 1999, all licensees responded to GL 98-01, Supplement 1. The responses indicated that 68 plants are Y2K ready and 35 plants need to complete work on a few non-safety computer systems or devices after July 1, 1999 to be Y2K ready.

\1\ On January 14, 1999, NRC issued GL 98-01, Supplement 1, ``Year 2000 Readiness of Computer Systems at Nuclear Power Plants,' which provided licensees with a voluntary alternate response to that required by GL 98-01. The alternate response, also due by July 1, 1999, should provide information on the overall Y2K readiness of the plant, including those systems necessary for continued plant operation that are not covered by the terms and conditions of the license and NRC regulations.

As part of its oversight of licensee Y2K activities, NRC staff conducted sample audits of 12 plant-specific Y2K readiness programs.

The objectives of the audits were to--

- <bullet> Assess the effectiveness of licensees' programs for achieving Y2K readiness and in addressing compliance with the terms and conditions of their license and NRC regulations and continued safe operation.

- <bullet> Evaluate program implementation activities to ensure that licensees are on schedule to achieve Y2K readiness in accordance with GL 98-01 guidelines.

- <bullet> Assess licensees' contingency planning for addressing risks associated with events resulting from Y2K problems.

The NRC determined that this approach was an appropriate means of oversight of licensee Y2K readiness efforts because: (1) all licensees had committed to the nuclear power

[[Page 45903]]

industry Y2K readiness guidance (NEI/NUSMG 97-07) in their first response to NRC GL 98-01; and (2) the audit would verify that licensees were effectively implementing the guidelines. The audit sample of 12 licensees included large utilities such as Commonwealth Edison and Tennessee Valley Authority as well as small single-unit licensees such as North Atlantic Energy (Seabrook) and Wolf Creek Nuclear Operating Corporation. The NRC staff selected a variety of types of plants of different ages and locations in this sample in order to obtain the necessary assurance that nuclear power industry Y2K readiness programs are being effectively implemented and that licensees are on schedule to meet the readiness target date of July 1, 1999, established in GL 98-01. Also, NRC staff had not identified any Y2K problems in safety-related actuation systems as part of its audit activities.

In late January 1999, the NRC staff completed the 12 audits. At the conclusion of the audits, the NRC staff had the following observations:

- <bullet> Plant-specific Y2K projects based on NEI/NUSMG 97-07 began in mid to late 1997. Use of NEI/NUSMG 97-07 guidance results in an effective, structured program. The programs are generally on schedule for plants to be Y2K ready by July 1, 1999. However, at some plants the licensees have scheduled some remediation, testing, and final certification for the fall 1999 outage.

- <bullet> Management oversight is vital for program effectiveness.

- <bullet> Sharing information through owners groups, utility alliances, the Electric Power Research Institute, and NEI is aiding the overall nuclear industry effort.

- <bullet> Independent audits and peer reviews of programs are very useful.

- <bullet> Safety system functions are usually not affected. There is limited computer use in safety-related systems and components.

- <bullet> Failures identified in embedded devices have generally not affected the functions performed but have led to errors such as incorrect dates in printouts, logs, or displays.

<bullet> Central control of Y2K program activities, effective QA (including the use of existing plant procedures and controls), and independent peer reviews promote consistency across activities and improve the program.

On the basis of these audit observations, the NRC staff concluded that the audited licensees are effectively addressing Y2K issues and are undertaking the actions necessary to achieve Y2K readiness in accordance with the GL 98-01 target date, although some plants will have some remediation, testing, and final certification scheduled for the fall 1999 outage. The NRC staff did not identify any issues that would prevent these licensees from achieving Y2K readiness.

Licensee Y2K contingency planning efforts had not progressed far enough during the original 12 audits for a complete NRC staff review of the adequacy of implementation of the Y2K activities. Therefore, the NRC staff audited the contingency planning efforts of six licensees different from the 12 included in the initial sample Y2K readiness audits. These audits focused on the licensee's approach to addressing both internal and external Y2K risks to safe plant operations based on the guidance in NEI/NUSMG 98-07. These audits were completed in June 1999.

In addition to NRC staff activities addressed above, NRC regional staff reviewed plant-specific Y2K program implementation activities at all operating nuclear power plants. The regional staff used guidance prepared by NRC Headquarters staff, which conducted the 12 sample audits. These reviews were completed by July 1999. One of the public comments received by NRC in response to the petition indicated that the audits conducted by NRC staff are too few. On the basis of the information above, the NRC staff has reviewed the Y2K programs at all operating nuclear power plants, thereby addressing this comment.

NRC staff will continue its oversight of Y2K issues at nuclear power plants through the remainder of 1999. On the basis of the reviews of the licensee responses to GL 98-01, Supplement 1, findings of the additional audits and reviews, and any additional information, NRC will, by September 1999, determine the need for issuing orders to address Y2K readiness issues, including, if warranted, shutdown of a plant. At this time, NRC believes that all licensees will be able to operate their plants safely during the transition from 1999 to 2000 and does not believe that significant plant-specific action directed by NRC is likely to be needed.

As discussed above, GL 98-01 set a date of July 1, 1999, for licensees to submit information on their efforts to complete their plant-specific Y2K program. The July 1, 1999, date was selected to ensure that there would be adequate time for the Commission to determine what additional regulatory action, if any, would be necessary to ensure that Y2K problems will not threaten adequate protection to public health and safety. Licensees of plants with a projected completion date by September 30, 1999, will be monitored to ensure that the schedules are maintained. Completion of plant-specific items

identified by licensees in the generic letter responses will be documented in routine NRC inspection reports. The licensees of the plants that are scheduled to be Y2K ready after September 30 will receive additional scrutiny on a case-by-case basis to ensure that no Y2K deficiencies remain. If, by September 30, 1999, it appears that Y2K readiness activities will not be completed by December 31, 1999 transition such that there is sufficient assurance that all license conditions and relevant NRC regulations ² are met, the NRC will take appropriate regulatory action, including the issuance of orders requiring specific actions, if warranted. NIRS presents no information or argument why these above actions by the licensees and the inspection, auditing, and oversight activities of the NRC are insufficient to address Y2K problems, such that actions required in NIRS' proposed rule are necessary.

\2\ These regulations are--

<bullet> 10 CFR 50.36, ``Technical Specifications,'' paragraph (c)(3), ``Surveillance requirements,'' and paragraph (c)(5), ``Administrative controls.''

<bullet> 10 CFR 50.47, ``Emergency Plans,'' paragraph (b)(8).

<bullet> Appendix B to 10 CFR Part 50, Criterion III, ``Design Control,'' and Criterion XVII, ``Quality Assurance Records.''

<bullet> Appendix E to 10 CFR Part 50, Section VI, ``Emergency Response Data System.''

<bullet> Appendix A to 10 CFR Part 50, General Design Criterion (GDC) 13, ``Instrumentation and Control''; GDC 19, ``Control Room''; and GDC 23, ``Protection System Failure Modes.''

B. The Need for Y2K ``Compliance,'' as Opposed to ``Readiness''

NIRS' proposed rule would require that nuclear power plants be shut down by December 1, 1999, unless licensees demonstrate that Y2K compliance has been achieved. However, NIRS has not explained why ``Y2K compliance,'' as opposed to ``Y2K readiness,'' is necessary. ``Y2K compliant'' is generally understood as referring to computer systems or applications that accurately process date/time data (including but not limited to calculating, comparing, and sequencing) from, into, and between the 20th and 21st centuries, the years 1999 and 2000, and leap-year calculations. ``Y2K ready'' is generally understood as referring to a computer system or application that has been determined to be suitable for continued use into the year 2000 even though the computer system or application is not fully Y2K compliant. For ``Y2K ready'' systems, licensees may have to rely upon work arounds and other activities to ensure that the systems, components,

and equipment function as intended. Prudence might lead to Y2K compliance as an objective for remedial activities in order to reduce licensee costs of implementing workarounds and other activities in the interim until full Y2K compliance is achieved. However, protection of public health and safety does not necessitate establishment of Y2K compliance as a regulatory requirement, and failure to achieve compliance should not require plant shutdown, so long as Y2K readiness is achieved. Accordingly, the NRC does not believe that a rule that requires Y2K compliance, or Y2K readiness, is appropriate or necessary for ensuring reasonable assurance of adequate protection at nuclear power plants after December 1, 1999.

C. Limited Susceptibility of Nuclear Power Plant Systems to Y2K Problems

NRC audits and reviews indicate that most nuclear power plant systems necessary for shutting down the reactor and maintaining it in a safe shutdown condition are not susceptible to Y2K problems. The majority of commercial nuclear power plants have protection systems that are analog rather than digital. Because Y2K concerns are associated with digital systems, analog reactor protection system functions are not affected by the Y2K issue. Errors such as incorrect dates in printouts, logs, or displays have been identified by licensees in safety-related devices, but the errors do not affect the functions performed by the devices or systems. Most Y2K issues are in balance-of-plant and other systems that have no direct functions necessary for safe operation of the reactor.

With respect to safety systems using digital electronics that are necessary for performing safe-shutdown and maintaining the reactor in a safe shutdown condition, licensees are undertaking the NEI/NUSMG 97-07 and NEI/NUSMG 98-07 processes described above for addressing Y2K problems. With respect to balance-of-plant systems, licensees implementing their plant-specific Y2K program are classifying important balance-of-plant and other non-safety-related systems (such as those that support continued plant operations, provide information and aid to the plant operators like sequence-of-events monitoring for tracking post-shutdown status of plants, and whose failure could lead to a plant transient or trip) as ``mission-critical'' or ``high.'' Systems and equipment classified as mission-critical or high, when found to be Y2K susceptible during the assessment stage of the Y2K program, are also scheduled to be remediated similar to safety-related systems.

In sum, the NRC believes that the actual scope of plant systems necessary to provide reasonable assurance of adequate protection to public health and safety, which are potentially susceptible to Y2K problems, is relatively limited and that the licensees' current activities are sufficient to ensure that Y2K problems will not adversely affect safety-related or balance-of-plant systems.

D. Public Comments

One public comment in support of the NIRS petition stated that embedded chips are difficult to identify and the effects of their failures are poorly understood, especially in the U.S. power grid. When the NRC staff was developing GL 98-01, it recognized that embedded systems pose a potential Y2K problem that must be recognized and addressed in any successful Y2K effort. Accordingly, GL 98-01 informed licensees that Y2K programs should be augmented to address remediation of embedded systems. Licensees have stated in their responses to the generic letter that embedded systems are being addressed in their Y2K programs, and these statements have been confirmed by NRC audits to date. NRC understands that the electric utilities providing power to the grid have similar efforts underway that are being monitored by the North American Electric Reliability Council.

One public comment in support of the petition indicated that the rule should require nuclear power plants to shut down 6 months before the end of 1999 to allow a safe period of time to shut down the plant. The NRC does not agree that it takes 6 months to safely shut down a plant. Under normal conditions, it takes several hours to safely shut down a nuclear power plant by reducing reactor power gradually. However, in an emergency, the reactor can be shut down safely within seconds, either automatically or manually. The reactor will be shut down automatically by the reactor protection system upon the sensing of an unusual condition. Moreover, the operator always has the capability to manually shut down the reactor using the reactor protection system. Accordingly, the NRC does not agree that it is necessary to shut down nuclear power plants 6 months before the end of 1999 in order to ensure a safe shutdown of the plants.

A commenter in favor of the petition stated that the Y2K problem could increase the chance of a meltdown. However, the commenter did not provide any basis for this assertion. The NRC disagrees with the commenter. Safety functions performed by the reactor protection system for shutting down the reactor and by the engineered safety features actuation for mitigating accidents, cooling down the reactor, and providing emergency power to safety systems upon a loss of offsite power are not affected by the Y2K problem. Although there is some concern that the reliability of the offsite power sources may be lower during the Y2K transition, if a loss of offsite power were to occur because of Y2K, the plant would trip automatically because all nuclear plants are designed for such an event. The emergency onsite power supply system would provide power to the safety system equipment automatically. This sequence of events is not affected by the Y2K problem because all these safety systems do not rely upon computer-operated systems or components that are date-sensitive. For these reasons, the NRC disagrees that a Y2K problem could increase the probability of a core melt accident at a nuclear power plant.

One public comment in support of the petition indicated that the audits conducted by NRC staff are too few. The NRC has responded to this comment in section I.A.

E. Summary

The NRC believes that licensees' Y2K activities and programs, considered together with NRC oversight activities, provide a reasonable approach for ensuring that Y2K problems will not pose an unreasonable threat to public health and safety. NIRS has not explained why this regulatory approach will not provide reasonable assurance of adequate protection from any potential Y2K-initiated problems at operating nuclear power plants, such that the rule proposed by NIRS is necessary.

II. Part 50 Non-Power Reactor Licensees

NRC used several methods to inform all non-power reactor (NPR) licensees of the need to ensure that their facilities are ready for the year 2000. In 1996, NRC staff contacted all NPR licensees informing them of a potential for problems in systems either controlling or supporting the reactor because of Y2K issues. In December 1996, NRC issued IN 96-70 to alert nuclear facility licensees to the Y2K problem. IN 96-70 described the potential problems that nuclear power plant computer systems and software may encounter as a result of the change to the new century and how the Y2K issue may affect NRC licensees. IN 96-70 encouraged all licensees to examine their uses of computer systems and software well

[[Page 45905]]

before the year 2000. IN 96-70 also suggested that licensees consider appropriate actions for examining and evaluating their computer systems for Y2K vulnerabilities.

NRC also coordinated with the Organization of Test, Research and Training Reactors (TRTR) to distribute information about the Y2K problem through TRTR newsletters. These newsletters were distributed to all members of the organization to focus attention on the Y2K problem and related ongoing activities. The staff at all 37 licensees with operating reactors receive copies of the TRTR newsletter. The TRTR newsletters articles included ``Concerns about the Millennium,' February 1997; ``Year 2000 Concerns,' February 1998; ``NRC Response on Year 2000,' May 1998; ``More on the Y2K Issue,' August 1998; and ``Another Y2000 Notice,' November 1998. NRC staff has confirmed through several telephone conversations and discussions during inspections that all licensees of operating reactors are aware of the Y2K concerns and have ongoing actions to be Y2K ready by the end of the year or sooner.

Since 1998, while conducting inspections of NPR facilities, the NRC

staff is also verifying that licensees are addressing the Y2K problem with regard to reactor safety. NRC staff has inspected about 50 percent of the operating reactors and intends to complete the inspections of all operating NPRs by October 1999. These inspections will verify that the licensees have programs to deal with Y2K and that all digital safety equipment at these facilities are considered in the program. Moreover, most institutions that operate the NPRs have their own Y2K programs that include the NPRs.

The safety systems at most operating reactors are analog systems that are not affected by the Y2K problem. Several operating reactors have digital safety equipment that provides instrument indication to the facility operator that is part of the licensee's Y2K program. Also, seven of these reactors have digital reactor protection system functions also considered in the licensee's Y2K program. These systems operate in parallel with the analog reactor protection systems, which are not affected by Y2K. Also, the digital systems initiate reactor scrams in case of a malfunction in the digital equipment. The analog systems generally provide the required reactor safety functions. The analog systems are independent of the digital equipment and have built-in redundancy to ensure that the reactor scrams. The power levels of these reactors are low (up to a maximum of 2 MWt) and many of them operate at low temperatures in relatively large pools of water. The only safety function that is generally required is for the reactor to scram. Thus, the Y2K concern poses very low risk. NIRS does not explain why the licensees' Y2K program activities and NRC's oversight of the licensees' implementation of the programs are inadequate such that the rule proposed by NIRS is necessary to provide reasonable assurance of adequate protection.

III. Part 50 Decommissioning Nuclear Power Plant Licensees

The suggested rule language in the petition would require that all facilities not compliant with Y2K issues be shut down by December 1, 1999. Nuclear power plants that are permanently shutdown with fuel removed from the reactor core would, therefore, not be subject to the rule as proposed by NIRS. However, since the purpose of the proposed rule appears to be directed to ensuring that Y2K problems at all nuclear power plants--both operating and decommissioning--will not pose a threat to public health and safety, the following discussion on the activities for addressing the Y2K problem at decommissioning nuclear power plants is provided.

There are two potential radiological health and safety concerns with respect to Y2K problems at decommissioning plants: (1) spent fuel storage, including site security; and (2) the actual conduct of dismantlement and decommissioning activities. Of greater concern is the spent fuel storage. The concerns in this area relate to providing sufficient cooling to the spent fuel and providing sufficient security against diversion and sabotage of the spent fuel. There are 21

decommissioning nuclear power plants that have been shut down more than a year, 6 of which have had spent fuel removed from the site. Accordingly, there are only 15 decommissioning nuclear power plants where spent fuel storage is of concern. Although licensees for all of these facilities are implementing Y2K programs, it is unlikely that Y2K problems would pose a significant problem to providing sufficient spent fuel cooling. First, electrical and makeup water systems for spent fuel pools are not computer-controlled. Moreover, even if there was an interruption in electrical power, there is a long time period for the licensee to respond to the problem before integrity of the spent fuel rods becomes an issue because sufficient time is available to take compensatory action before boiling starts. The spent fuel pool is conservatively estimated (based on the Zion units) to begin boiling 68 hours after loss of the spent fuel pool cooling system. Boiling does not become a concern until the fuel rods begin to be uncovered by boil-off of cooling water. Since fuel rods are normally covered by 23 feet of water (for purposes of shielding), and it would take approximately two weeks or more to begin uncovering the spent fuel rods (assuming that no make-up water is added to the pool), the NRC believes that there is sufficient time to recover electrical power and/or provide makeup water to prevent the fuel rods from uncovering.

The other threat to spent fuel is diversion and sabotage. Licensees of decommissioning reactors are taking steps to ensure that Y2K problems will not disable necessary security and safeguards systems and controls. Licensees with computer-based site security systems that have been identified as potentially Y2K vulnerable have tested the system for Y2K, upgraded the system to be Y2K compliant, or will make the system Y2K compliant before the end of 1999.

With respect to the safety of conducting dismantlement and decommissioning activities, the NRC does not believe that these activities are subject to Y2K problems that would pose a threat to public health and safety because the conduct of these activities in the field do not rely upon computer-controlled devices to ensure protection against radiological dangers.

In sum, licensees of decommissioning nuclear power plants are implementing Y2K activities that address equipment and systems important to safety, such that there is reasonable assurance of adequate protection to public health and safety.

IV. Major Parts 40 and 70 Licensees

To alert major Parts 40 and 70 licensees of the potential Y2K problem, NRC issued Information Notice (IN) 96-70, 'Year 2000 Effect on Computer System Software,' dated December 24, 1996. IN 96-70 described the potential Y2K problems, encouraged licensees to examine their uses of computer systems and software well before the year 2000, and suggested that licensees consider appropriate actions to examine and evaluate their computer systems for Y2K vulnerabilities.

In order to gather Y2K information regarding materials and major fuel cycle facilities, NRC formed a Y2K Team within the Office of Nuclear Material Safety and Safeguards (NMSS) in 1997. From September 1997 through December 1997, this NMSS Y2K Team visited a cross-section of materials

[[Page 45906]]

licensees and fuel cycle facilities and conducted Y2K interviews. Each licensee or facility visited by the team indicated that they were aware of the Y2K issue and were in various stages of implementing their Y2K readiness program.

On June 22, 1998, the NRC staff issued Generic Letter (GL) 98-03, ``NMSS Licensees' and Certificate Holders' Year 2000 Readiness Programs.'' This GL requested major Parts 40 and 70 licensees to submit by September 20, 1998, written responses regarding their facility-specific Y2K readiness program in order to confirm that they were addressing the Y2K problem effectively. All licensees responded to GL 98-03 by stating that they have adopted a facility-specific Y2K readiness program and that the scope of the program included identifying and, where appropriate, remediating, hardware, software, and embedded systems, and provided for risk management and the development of contingency plans.

GL 98-03 also requested a written response, no later than December 31, 1998, which confirmed that these facilities were Y2K ready or provided a status report of work remaining to be done to become Y2K ready, including completion schedules. All licensees provided a second response to GL 98-03, which identified work remaining to be done, including completion schedules. Furthermore, following the second response, NRC requested a third written response, no later than July 1, 1999, which would confirm that these facilities are Y2K ready or would provide an updated status report.

On August 12, 1998, IN 98-30, ``Effect of the Year 2000 Computer Problem on NRC Licensees and Certificate Holders,' ' provided licensees additional information on the Y2K issue. IN 98-30 provided definitions of ``Y2K ready' ' and ``Y2K compliant,' ' encouraged licensees to contact vendors and test their systems for Y2K problems, and described elements of a Y2K readiness program.

Between September 1997 and October 1998, the major Parts 40 & 70 licensees were also asked Y2K questions during other inspections. Based on these Y2K inspections, the licensees were aware of the Y2K problem and were adequately addressing Y2K issues. There have been no identified risk-significant Y2K concerns for major Parts 40 and 70 licensees.

NIRS' proposed rule would require that licensees be shutdown by December 1, 1999, unless licensees demonstrate that ``Y2K compliance' ' has been achieved. However, NIRS has not explained why ``Y2K compliance' ' as opposed to ``Y2K readiness' ' is necessary. NIRS

asserted that NRC has not made explicit how it will define ``Y2K compliance.'' However, NRC explicitly defined the terms ``Y2K ready'' and ``Y2K compliant'' in GL 98-03. ``Y2K ready'' was defined as a computer system or application that has been determined to be suitable for continued use into the year 2000, even though the computer system or application is not Y2K compliant. ``Y2K compliant'' was defined as a computer system or application that accurately processes date/time data (including, but not limited to, calculating, comparing, and sequencing) from, into, and between the years 1999 and 2000, and beyond, including leap-year calculations. Thus, by definition, systems that are ``Y2K ready'' are able to perform their functions properly. There is no discernable safety reason why achieving Y2K readiness rather than Y2K compliance should result in facility shutdown. Accordingly, there is no basis for requiring facility shutdown if a licensee cannot demonstrate Y2K compliance.

NIRS presents no information or argument why those actions by the licensees and NRC described above are insufficient to address Y2K problems and to demonstrate that reasonable assurance of adequate protection will not be provided after December 1, 1999, so that facility shutdown is necessary.

V. Part 30 and Minor Parts 40 and 70 Licensees

To alert Part 30 and minor Parts 40 and 70 licensees, the NRC issued INs 96-70 and 98-30, which have been discussed in Section IV, ``Major Parts 40 and 70 Licensees.''

In addition to the efforts by the NMSS Y2K Team to gather information regarding materials licensees and major fuel facilities from September through December 1997, discussed under Section IV, NMSS staff also conducted telephone interviews with device manufacturers and distributors. Further, NRC determined that few of approximately 5,800 materials licensees use processes or have safety systems that are computer-controlled, thus minimizing potential Y2K impacts. The interviews and site visits confirmed that licensees were identifying and addressing potential Y2K problems.

From the interviews conducted by the NMSS Y2K Team, NRC learned that early versions of some treatment planning systems (computer systems for calculating dose to medical patients being treated with radiation or radioactive material) have Y2K problems and that upgrades for treatment planning systems were available. However, treatment planning systems are regulated by the U.S. Food and Drug Administration (FDA) and not by NRC because the systems do not contain licensed material. NRC has shared information on non-Y2K-compliant treatment planning systems with the FDA. For materials licensees, the NMSS Y2K Team did not identify any Y2K issues for NRC-regulated material. As a result of the interviews and site visits, NRC's focus has been to determine if any commercially available devices (medical and industrial) have potential Y2K vulnerabilities and to ensure that

licensees evaluate self-developed systems, commercial off-the shelf software and hardware, and safety systems.

In addition to Y2K interviews, materials inspectors have been instructed to confirm receipt of NRC's information notices, determine whether the licensees have identified any potential problems associated with the Y2K issue, and note any corrective actions taken by the licensees. Through the routine inspection process, NRC has made assessments of the Y2K status of its materials licensees and continues to do so. To date, only the treatment planning systems described above, dose calibrators, and a tote position display for an irradiator have been identified through the inspection process as having Y2K problems. NRC materials inspectors have indicated that licensees are aware of available upgrades for treatment planning systems and dose calibrators. The irradiator tote position display is not a safety system. Further, the irradiator tote position display system that had the Y2K problem was a one-of-a-kind modification made by the licensee (the licensee was authorized by NRC to make the modification). The irradiator licensee is updating the tote position display system to eliminate the Y2K problem. No generic Y2K issues for NRC-regulated material used by materials licensees have been identified.

NIRS asserted that NRC has not made explicit what it plans to do about those facilities that cannot prove compliance. As discussed in Section IV, ``Major Parts 40 and 70 Licensees'' above, NIRS has not explained why ``Y2K compliance'' as opposed to ``Y2K readiness'' is necessary. Furthermore, Y2K readiness is not required for protection of public health and safety for Part 30 and minor Parts 40 and 70 licensees due to the amount and type of licensed material used by them. The risks to the public from these facilities are low. In addition, NRC has determined that few of the

[[Page 45907]]

approximately 5,800 materials licensees use processes or have safety systems that are computer-controlled, thus minimizing potential Y2K impacts. Accordingly, there is no basis for requiring facility shutdown if a licensee cannot demonstrate ``Y2K compliance.''

NIRS presents no information or argument why those actions by the licensees and NRC described above are insufficient to address Y2K problems and to demonstrate that reasonable assurance of adequate protection will not be provided after December 1, 1999, so that facility shutdown is necessary.

VI. Public Information

NIRS requested in item (c) of its petition that NRC adopt regulations that would require that licensees make available to the public by December 1, 1999, all information related to the examination and repair, modification, and/or replacement of all computer systems,

embedded chips, and other electronic equipment that may be date-sensitive. NIRS indicated that this rule provision is necessary in order to allow ``independent experts'' and the public to examine this information.

The NRC has already made available to the public substantial information on Y2K and the status of licensees' activities to address potential Y2K problems and will continue to make this information public. The audit reports of the NRC staff reviews of the 12 nuclear power plant-specific Y2K readiness project activities and documentation are publicly available both in the Public Document Rooms and the NRC Year 2000 Web site. The Y2K readiness information submitted in July 1999 by nuclear power plant licensees under GL 98-01, Supplement 1, is available to the public, as with any other correspondence that is received from licensees. The reports documenting the NRC staff audits of the six nuclear power plant-specific contingency planning activities and the results of the facility-specific Y2K program reviews of all operating nuclear power plants are also available to the public. The NRC inspection reports with Y2K information from Parts 30, 40, and 70 licensees and the licensees' responses to GL 98-03 have been placed in the PDR. Summaries of (1) inspection reports with Y2K information, (2) GL 98-03 responses, and (3) interviews with a cross-section of materials and fuel cycle licensees on Y2K issues are available on the NRC Year 2000 Web site.

In view of the information that has been made available and will be made available to the public, NIRS has not provided any basis for requiring licensees, by rule, to provide public access to Y2K information beyond that which the NRC has determined must be submitted to the NRC in furtherance of the NRC's regulatory oversight.

Conclusion

The rule proposed by NIRS is not needed because the Commission has determined that the activities taken by licensees to implement a systematic and structured facility-specific Y2K readiness program, together with the NRC's oversight of the licensees' implementation of these Y2K readiness programs, provide reasonable assurance of adequate protection to public health and safety.

For these reasons, the Commission denies the petition.

Dated at Rockville, Maryland, this 17th day of August, 1999.

For the Nuclear Regulatory Commission.

Andrew L. Bates,

Acting Secretary of the Commission.

[FR Doc. 99-21750 Filed 8-20-99; 8:45 am]

BILLING CODE 7590-01-P

Proposed Rules

Federal Register

Vol. 64, No. 162

Monday, August 23, 1999

This section of the FEDERAL REGISTER contains notices to the public of the proposed issuance of rules and regulations. The purpose of these notices is to give interested persons an opportunity to participate in the rule making prior to the adoption of the final rules.

NUCLEAR REGULATORY COMMISSION

10 CFR Parts 30, 40, 50, and 70

[Docket No. PRM-50-65]

Nuclear Information and Resource Service; Petition for Rulemaking Denial

AGENCY: Nuclear Regulatory Commission.

ACTION: Petition for rulemaking; denial.

SUMMARY: The Nuclear Regulatory Commission (NRC) is denying a petition for rulemaking (PRM-50-65) from the Nuclear Information and Resource Service (NIRS). The petitioner requested that NRC amend its regulations to require the shutdown of nuclear facilities that are not compliant with date-sensitive, computer-related issues regarding the Year 2000 (Y2K) issue. The petitioner requested that NRC take this action to ensure that Y2K issues will not cause the failure of nuclear safety systems and thereby pose a threat to public health and safety. NRC is denying the petition because the Commission has determined that the actions taken by licensees to implement a systematic and structured facility-specific Y2K readiness program and NRC's oversight of the licensees' implementation of these Y2K readiness programs provide reasonable assurance of adequate protection to public health and safety.

ADDRESSES: Copies of the petition for rulemaking, the public comments received, and NRC's letters to the petitioners are available for public inspection or copying in the NRC Public Document Room, 2120 L Street, NW. (Lower Level), Washington, DC, as well as on NRC's rulemaking website at <http://ruleforum.llnl.gov>.

FOR FURTHER INFORMATION CONTACT: Matthew Chiramal, Office of Nuclear Reactor Regulation, U.S. Nuclear Regulatory Commission, Washington, DC 20555-0001, telephone 301-415-2845, E-mail address <mxm@nrc.gov>, or Gary W. Purdy, Office of Nuclear

Material Safety and Safeguards, U.S. Nuclear Regulatory Commission, Washington, DC 20555-0001, telephone 301-415-7897, E-mail address <gwp1@nrc.gov>.

SUPPLEMENTARY INFORMATION:

Background

NRC received three related petitions for rulemaking (PRM-50-65, PRM-50-66, and PRM-50-67), each dated December 10, 1998, submitted by NIRS concerning various aspects of Y2K issues and nuclear safety. This petition (PRM-50-65) requested that NRC adopt regulations that would require facilities licensed by NRC under 10 CFR Parts 30, 40, 50, and 70 to be Y2K compliant. The second petition (PRM-50-66) requested that NRC adopt regulations that would require facilities licensed by NRC under 10 CFR Part 50 to develop and implement adequate contingency and emergency plans to address potential system failures. The third petition (PRM-50-67) requested that NRC adopt regulations that would require facilities licensed by NRC under 10 CFR Parts 50 and 70 to provide reliable sources of back-up power. Because of the nature of these petitions and the date-specific issues they address, the petitioner requested that the petitions be addressed on an expedited schedule.

On January 25, 1999, NRC published a notice of receipt of a petition for rulemaking in the **Federal Register** (64 FR 3789). It was available on NRC's rulemaking website and in the NRC Public Document Room. The notice of receipt of a petition for rulemaking invited interested persons to submit comments by February 24, 1999.

The Petition

The petitioner requested that NRC adopt the following text as a rule:

Any and all facilities licensed by the Nuclear Regulatory Commission under 10 CFR Parts 30, 40, 50, and 70 shall be closed by 12 pm Eastern Standard Time, December 1, 1999, unless and until each facility has: (a) fully and comprehensively examined all computer systems, embedded chips, and other electronic equipment that may be date-sensitive to ensure that all such systems that may be relevant to safety are Y2K compliant; (b) repaired, modified, and/or replaced all such systems that are not found to be Y2K compliant; (c) made available to the public all information related to the examination and repair, modification and/or replacement of all such systems; (d) determined, through full-scale testing, that all repairs,

modifications, and/or replacements of all such systems are, in fact, Y2K compliant.

The petitioner noted that in NRC Generic Letter (GL) 98-01, "Year 2000 Readiness of Computer Systems at Nuclear Power Plants," dated May 11, 1998, the NRC has recognized the potential for date-related problems that may affect a system or application (the Y2K problem). These potential problems include not representing the year properly, not recognizing leap years, and improper date calculations. These problems could result in the inability of computer systems to operate or to function properly. The petitioner stated that the Y2K problem could potentially interfere with the proper operation of computer systems, microprocessor-based hardware, and software or databases relied on at nuclear power plants. Further, the petitioner asserted that the Y2K problem could result in a plant trip and subsequent complications in tracking post-shutdown plant status and recovery as a result of a loss of emergency data collection. Additionally, the petitioner is also concerned that power grids providing offsite power to nuclear stations could be affected to the extent that localized and widespread grid failures could occur.

The petitioner acknowledged that NRC has recognized the potential safety and environmental problems that could result if date-sensitive electronic systems fail to operate or provide false information. The petitioner asserted that NRC has required its licensees of reactor and major fuel cycle facilities to report by July 1, 1999, on their programs to ensure compliance with Y2K issues. In addition, the petitioner asserted that NRC has not made explicit how it will define compliance nor what it plans to do for licensees of facilities that cannot prove compliance. In the petitioner's suggested regulatory text, NIRS defined compliance with Y2K issues as evaluation of all potential problems that may be safety-related, repair of all such problems, and full-scale testing of all solutions. The petitioner's proposed regulation would also require full public disclosure of all evaluation, repair, and testing data so that the information may be examined by independent experts and the public. Finally, the petitioner's proposed regulation would make it clear that nuclear facilities will be closed

until they can demonstrate full compliance with Y2K issues.

The petitioner concluded by stating that NRC is obligated to act decisively to protect public health and safety and the environment. NIRS stated that anything short of the suggested approach in the petition is insufficient to fulfill this obligation and that NRC should adopt the suggested regulation as soon as possible.

Public Comments on the Petition

In response to the petition, NRC received 70 comment letters, including 1 letter signed by 25 individuals from the State of Michigan, 3 letters from industry groups, 10 letters from utilities, 13 letters from private organizations, and 43 letters from private citizens.

Fifty-four letters supported the petition, 40 of which were from private citizens, 13 were from private organizations, and 1 that was signed by 25 individuals. The comments supporting the petition addressed concerns related to avoiding the occurrence of a catastrophic nuclear accident, the reasonableness of the petitioner's request, and opined that any uncertainty is too great for the nuclear industry.

Sixteen letters opposed the petition, of which 3 were from private citizens, 3 were from associated industries, and 10 were from utilities. The comments opposing the petition stated that the nuclear power industry has taken a coordinated approach to Y2K readiness, nuclear power plant licensees are implementing a structured Y2K program, NRC Y2K initiatives are underway, NRC staff is monitoring licensee activities, and current regulations and license conditions are adequate to address potential Y2K computer issues.

In some of the letters supporting the petition, the authors included the following additional comments that provide information or request action that was not contained in the petition. These comments noted:

1. The date proposed in the petition, December 1, 1999, to shut down all non-Y2K compliant nuclear power plants should be moved up 1 to 6 months before the year 2000. The reasons given were to allow sufficient time to shut down and to provide additional safety.

2. Power grid failure would not allow controlled shutdown of the plant and plants could experience problems like the Russians. The Y2K problem could increase the chance of a core melt.

3. The problem of "embedded systems," microchips, microprocessors, and such systems-within-systems are difficult to identify and the effects of

their multiple failures are poorly understood, especially in the U.S. power grid.

4. The audits conducted by NRC staff are too few.

These comments are addressed specifically in the discussion of "Reasons for Denial."

Reasons for Denial

The NRC is denying the NIRS petition because the NRC has determined that: (1) the actions taken by licensees to implement a systematic and structured facility-specific Y2K readiness program; and (2) NRC's oversight of licensees' implementation of these Y2K readiness programs together constitute an effective process for addressing Y2K issues such that there will continue to be reasonable assurance of adequate protection of public health and safety. NIRS has not presented any information (and no public comments have been received) that demonstrates that: (1) the licensees' activities are fundamentally incapable of effectively addressing Y2K issues in a timely fashion; (2) licensees are not adequately implementing the Y2K readiness programs; (3) NRC's inspection, audit, and oversight activities are fundamentally incapable of providing adequate regulatory control with respect to licensee implementation of Y2K readiness programs; and (4) the NRC is not effectively implementing its inspection, audit, and oversight activities with respect to Y2K issues. Finally, NIRS has not provided any basis why the NRC's current regulatory approach, which retains the regulatory authority to order licensees to discontinue or modify their licensed activities if the NRC finds that reasonable assurance of adequate protection to public health and safety will not be provided because of Y2K issues, will be inadequate in view of the 6-month time period between July 1, 1999, when licensees are required to inform the NRC of the status of their Y2K remediation activities and the December 31, 1999, date, when Y2K-induced problems are most likely to begin occurring.

Parts (a), (b), and (d) of the NIRS proposed rule are addressed below in Sections I, II, III, IV, and V for Part 50 operating nuclear power plants, Part 50 non-power reactors, Part 50 decommissioning nuclear power plants, major licensees under Parts 40 and 70, and Part 30 and minor Parts 40 and 70 licensees, respectively. Part (c) of NIRS' proposed rule, concerning public access to Y2K information, is addressed for all types of licensees in Section VI.

I. Part 50 Operating Nuclear Power Plant Licensees

A. Industry and NRC Activities Addressing Y2K

To alert nuclear facility licensees to the Y2K problem, NRC issued Information Notice (IN) 96-70, "Year 2000 Effect on Computer System Software," on December 24, 1996. IN 96-70 described the potential problems that nuclear power plant computer systems and software may encounter as a result of the change to the new century and how the Y2K issue may affect NRC licensees. IN 96-70 encouraged licensees to examine their uses of computer systems and software well before the year 2000 and suggested that licensees consider appropriate actions for examining and evaluating their computer systems for Y2K vulnerabilities.

In 1997, the nuclear industry began to assess the Y2K challenge and work with key Federal agencies to help nuclear power plant operators prepare for continued safe operations at the start of the year 2000. In July 1997, the Nuclear Utilities Software Management Group (NUSMG), a nuclear industry working group, conducted the first industry-wide workshop on Y2K readiness.

In October 1997, the Nuclear Energy Institute (NEI) and NUSMG issued a Y2K program plan guidance document, NEI/NUSMG 97-07, "Nuclear Utility Year 2000 Readiness," to all U.S. nuclear power plant licensees. This document provides a step-by-step method to identify, test, and repair potential Y2K computer problems and contains detailed procedures and checklists for resolving Y2K issues, based on the best utility practices.

NEI/NUSMG 97-07 presented a strategy for developing and implementing a nuclear utility Y2K program. The strategy recognizes management, implementation, quality assurance (QA) measures, regulatory considerations, and documentation as the fundamental elements of a successful Y2K project. The document contains examples currently in use by licensees and also recommends that the Y2K program be administered using standard project management techniques. The recommended components for management planning are management awareness, sponsorship, project leadership, project objectives, the project management team, the management plan, project reports, interfaces, resources, oversight, and QA. The suggested phases of implementation are awareness, initial assessment (which includes inventory, categorization, classification,

prioritization, and analysis of initial assessment), detailed assessment (including vendor evaluation, utility-owned or utility-supported software evaluation, interface evaluation, and remedial planning), remediation, Y2K testing and validation, and notification.

Y2K testing is used both as an investigative tool to examine systems and components to identify Y2K problems and as a validation tool to confirm that the corrective actions have eliminated the Y2K problem. Y2K testing in support of evaluation efforts to determine whether a Y2K problem is present is performed during detailed assessments. Systems and components will then be repaired or replaced in a process known as "remediation." Y2K testing subsequent to remediation is performed to determine whether the remediation efforts have eliminated the Y2K problem and no unintended functions are introduced. Y2K testing may be performed at several levels:

- Unit testing, which focuses on functional and compliance testing of a single application or software module;
- Integration testing, which tests the integration of related software modules and applications; and
- System testing, which tests the hardware and software components of a system.

For systems, components, and equipment classified as safety-related or critical to operations, the Y2K remediation activities include Y2K testing. On one end of the spectrum, there are the stand-alone, date-aware, microprocessor-based components that do not communicate digital information to any other devices. Properly performed bench testing of these devices, by the licensee or the vendor, coupled with software/firmware revision-level verification of the field devices as required, is adequate to establish their Y2K status. Repeating this test in the field as part of a plant-wide integrated test will not add any additional benefits related to system Y2K readiness. On the other end of the spectrum, the most highly complex systems, such as distributed control systems, may require in-plant testing of the remediated system. This testing may include a large portion of the plant equipment. However, even in this case, the maximum bounds of the test would involve the individual system being tested and the other devices and systems with which it communicates digital/date-related information.

NEI/NUSMG 97-07 specifies the QA measures that will apply to the activities in NEI/NUSMG 97-07 that apply primarily to project management and implementation. Documentation of Y2K

program activities and results includes documentation requirements, project management documentation, vendor documentation, inventory lists, checklists for initial and detailed assessments, and record retention. NEI/NUSMG 97-07 also contains examples of various plans and checklists as appendices that may be used or modified to meet the licensee's specific needs and/or requirements.

After issuing NEI/NUSMG 97-07, NEI conducted workshops and other means of sharing the experiences on the use of the document. In November 1997, NEI and NUSMG conducted the first in a series of industry-wide workshops on Y2K issues for project managers in charge of ensuring Y2K readiness at all operating nuclear power plants. In December 1997, NEI created an on-line bulletin board to share technical information and experiences related to testing and repairing computers and equipment.

In January 1998, the NRC issued a draft generic letter for public comment which proposed: (1) that licensees of operating nuclear power plants be required to provide certain information regarding their programs that address the Y2K problem in computer systems at their facilities; and (2) to endorse the guidance in NEI/NUSMG 97-07 as one possible approach in implementing a plant-specific Y2K readiness program, if augmented in the area of risk management, contingency planning, and remediation of embedded systems [**Federal Register** (63 FR 4498)]. In the absence of adverse comment on the adequacy of the guidance in NEI/NUSMG 97-07, the NRC issued GL 98-01 on May 11, 1998 [**Federal Register** (63 FR 27607)]. In August 1998, NEI issued an industry document, NEI/NUSMG 98-07, "Nuclear Utility Year 2000 Readiness Contingency Planning," that provided additional guidance for establishing a plant-specific contingency planning process. NEI/NUSMG 98-07 addressed management controls, preparation of individual contingency plans, and development of an integrated contingency plan that allows the licensee to manage internal and external risks associated with Y2K-induced events. External events that should be considered for facility-specific contingency planning include electric grid/transmission/distribution system events, such as loss of off-site power, grid instability and voltage fluctuations, load fluctuations and loss of grid control systems; loss of emergency plan equipment and services; loss of essential services; and depletion of consumables. NRC considers the guidance in NEI/NUSMG

98-07, when properly implemented, as an acceptable approach for licensees to mitigate and manage Y2K-induced events that could occur on Y2K-critical dates. In GL 98-01, NRC required all operating nuclear power plant licensees to submit written responses regarding their facility-specific Y2K readiness program in order to confirm that they are addressing the Y2K problem effectively. All licensees have responded to GL 98-01, stating that they have adopted a plant-specific Y2K readiness program based on the guidance of NEI/NUSMG 97-07, and the scope of the program includes identifying and, where appropriate, remediating, embedded systems, and provides for risk management and the development of contingency plans.

GL 98-01¹ also requests a written response, no later than July 1, 1999, confirming that these facilities are Y2K ready with regard to compliance with the terms and conditions of their license and NRC regulations. Licensees that are not Y2K ready by July 1, 1999, must provide a status report and schedule for the remaining work to ensure timely Y2K readiness. By July 1, 1999, all licensees responded to GL 98-01, Supplement 1. The responses indicated that 68 plants are Y2K ready and 35 plants need to complete work on a few non-safety computer systems or devices after July 1, 1999 to be Y2K ready.

As part of its oversight of licensee Y2K activities, NRC staff conducted sample audits of 12 plant-specific Y2K readiness programs. The objectives of the audits were to—

- Assess the effectiveness of licensees' programs for achieving Y2K readiness and in addressing compliance with the terms and conditions of their license and NRC regulations and continued safe operation.
- Evaluate program implementation activities to ensure that licensees are on schedule to achieve Y2K readiness in accordance with GL 98-01 guidelines.
- Assess licensees' contingency planning for addressing risks associated with events resulting from Y2K problems.

The NRC determined that this approach was an appropriate means of oversight of licensee Y2K readiness efforts because: (1) all licensees had committed to the nuclear power

¹ On January 14, 1999, NRC issued GL 98-01, Supplement 1, "Year 2000 Readiness of Computer Systems at Nuclear Power Plants," which provided licensees with a voluntary alternate response to that required by GL 98-01. The alternate response, also due by July 1, 1999, should provide information on the overall Y2K readiness of the plant, including those systems necessary for continued plant operation that are not covered by the terms and conditions of the license and NRC regulations.

industry Y2K readiness guidance (NEI/NUSMG 97-07) in their first response to NRC GL 98-01; and (2) the audit would verify that licensees were effectively implementing the guidelines. The audit sample of 12 licensees included large utilities such as Commonwealth Edison and Tennessee Valley Authority as well as small single-unit licensees such as North Atlantic Energy (Seabrook) and Wolf Creek Nuclear Operating Corporation. The NRC staff selected a variety of types of plants of different ages and locations in this sample in order to obtain the necessary assurance that nuclear power industry Y2K readiness programs are being effectively implemented and that licensees are on schedule to meet the readiness target date of July 1, 1999, established in GL 98-01. Also, NRC staff had not identified any Y2K problems in safety-related actuation systems as part of its audit activities.

In late January 1999, the NRC staff completed the 12 audits. At the conclusion of the audits, the NRC staff had the following observations:

- Plant-specific Y2K projects based on NEI/NUSMG 97-07 began in mid to late 1997. Use of NEI/NUSMG 97-07 guidance results in an effective, structured program. The programs are generally on schedule for plants to be Y2K ready by July 1, 1999. However, at some plants the licensees have scheduled some remediation, testing, and final certification for the fall 1999 outage.
 - Management oversight is vital for program effectiveness.
 - Sharing information through owners groups, utility alliances, the Electric Power Research Institute, and NEI is aiding the overall nuclear industry effort.
 - Independent audits and peer reviews of programs are very useful.
 - Safety system functions are usually not affected. There is limited computer use in safety-related systems and components.
 - Failures identified in embedded devices have generally not affected the functions performed but have led to errors such as incorrect dates in printouts, logs, or displays.
 - Central control of Y2K program activities, effective QA (including the use of existing plant procedures and controls), and independent peer reviews promote consistency across activities and improve the program.

On the basis of these audit observations, the NRC staff concluded that the audited licensees are effectively addressing Y2K issues and are undertaking the actions necessary to achieve Y2K readiness in accordance

with the GL 98-01 target date, although some plants will have some remediation, testing, and final certification scheduled for the fall 1999 outage. The NRC staff did not identify any issues that would prevent these licensees from achieving Y2K readiness.

Licensee Y2K contingency planning efforts had not progressed far enough during the original 12 audits for a complete NRC staff review of the adequacy of implementation of the Y2K activities. Therefore, the NRC staff audited the contingency planning efforts of six licensees different from the 12 included in the initial sample Y2K readiness audits. These audits focused on the licensee's approach to addressing both internal and external Y2K risks to safe plant operations based on the guidance in NEI/NUSMG 98-07. These audits were completed in June 1999.

In addition to NRC staff activities addressed above, NRC regional staff reviewed plant-specific Y2K program implementation activities at all operating nuclear power plants. The regional staff used guidance prepared by NRC Headquarters staff, which conducted the 12 sample audits. These reviews were completed by July 1999. One of the public comments received by NRC in response to the petition indicated that the audits conducted by NRC staff are too few. On the basis of the information above, the NRC staff has reviewed the Y2K programs at all operating nuclear power plants, thereby addressing this comment.

NRC staff will continue its oversight of Y2K issues at nuclear power plants through the remainder of 1999. On the basis of the reviews of the licensee responses to GL 98-01, Supplement 1, findings of the additional audits and reviews, and any additional information, NRC will, by September 1999, determine the need for issuing orders to address Y2K readiness issues, including, if warranted, shutdown of a plant. At this time, NRC believes that all licensees will be able to operate their plants safely during the transition from 1999 to 2000 and does not believe that significant plant-specific action directed by NRC is likely to be needed.

As discussed above, GL 98-01 set a date of July 1, 1999, for licensees to submit information on their efforts to complete their plant-specific Y2K program. The July 1, 1999, date was selected to ensure that there would be adequate time for the Commission to determine what additional regulatory action, if any, would be necessary to ensure that Y2K problems will not threaten adequate protection to public health and safety. Licensees of plants with a projected completion date by

September 30, 1999, will be monitored to ensure that the schedules are maintained. Completion of plant-specific items identified by licensees in the generic letter responses will be documented in routine NRC inspection reports. The licensees of the plants that are scheduled to be Y2K ready after September 30 will receive additional scrutiny on a case-by-case basis to ensure that no Y2K deficiencies remain. If, by September 30, 1999, it appears that Y2K readiness activities will not be completed by December 31, 1999 transition such that there is sufficient assurance that all license conditions and relevant NRC regulations² are met, the NRC will take appropriate regulatory action, including the issuance of orders requiring specific actions, if warranted. NIRS presents no information or argument why these above actions by the licensees and the inspection, auditing, and oversight activities of the NRC are insufficient to address Y2K problems, such that actions required in NIRS' proposed rule are necessary.

B. The Need for Y2K "Compliance," as Opposed to "Readiness"

NIRS' proposed rule would require that nuclear power plants be shut down by December 1, 1999, unless licensees demonstrate that Y2K compliance has been achieved. However, NIRS has not explained why "Y2K compliance," as opposed to "Y2K readiness," is necessary. "Y2K compliant" is generally understood as referring to computer systems or applications that accurately process date/time data (including but not limited to calculating, comparing, and sequencing) from, into, and between the 20th and 21st centuries, the years 1999 and 2000, and leap-year calculations. "Y2K ready" is generally understood as referring to a computer system or application that has been determined to be suitable for continued use into the year 2000 even though the computer system or application is not fully Y2K compliant. For "Y2K ready" systems, licensees may have to rely upon work arounds and other activities to ensure that the systems, components,

²These regulations are—

- 10 CFR 50.36, "Technical Specifications," paragraph (c)(3), "Surveillance requirements," and paragraph (c)(5), "Administrative controls."
- 10 CFR 50.47, "Emergency Plans," paragraph (b)(8).
- Appendix B to 10 CFR Part 50, Criterion III, "Design Control," and Criterion XVII, "Quality Assurance Records."
- Appendix E to 10 CFR Part 50, Section VI, "Emergency Response Data System."
- Appendix A to 10 CFR Part 50, General Design Criterion (GDC) 13, "Instrumentation and Control"; GDC 19, "Control Room"; and GDC 23, "Protection System Failure Modes."

and equipment function as intended. Prudence might lead to Y2K compliance as an objective for remedial activities in order to reduce licensee costs of implementing workarounds and other activities in the interim until full Y2K compliance is achieved. However, protection of public health and safety does not necessitate establishment of Y2K compliance as a regulatory requirement, and failure to achieve compliance should not require plant shutdown, so long as Y2K readiness is achieved. Accordingly, the NRC does not believe that a rule that requires Y2K compliance, or Y2K readiness, is appropriate or necessary for ensuring reasonable assurance of adequate protection at nuclear power plants after December 1, 1999.

C. Limited Susceptibility of Nuclear Power Plant Systems to Y2K Problems

NRC audits and reviews indicate that most nuclear power plant systems necessary for shutting down the reactor and maintaining it in a safe shutdown condition are not susceptible to Y2K problems. The majority of commercial nuclear power plants have protection systems that are analog rather than digital. Because Y2K concerns are associated with digital systems, analog reactor protection system functions are not affected by the Y2K issue. Errors such as incorrect dates in printouts, logs, or displays have been identified by licensees in safety-related devices, but the errors do not affect the functions performed by the devices or systems. Most Y2K issues are in balance-of-plant and other systems that have no direct functions necessary for safe operation of the reactor.

With respect to safety systems using digital electronics that are necessary for performing safe-shutdown and maintaining the reactor in a safe shutdown condition, licensees are undertaking the NEI/NUSMG 97-07 and NEI/NUSMG 98-07 processes described above for addressing Y2K problems. With respect to balance-of-plant systems, licensees implementing their plant-specific Y2K program are classifying important balance-of-plant and other non-safety-related systems (such as those that support continued plant operations, provide information and aid to the plant operators like sequence-of-events monitoring for tracking post-shutdown status of plants, and whose failure could lead to a plant transient or trip) as "mission-critical" or "high." Systems and equipment classified as mission-critical or high, when found to be Y2K susceptible during the assessment stage of the Y2K program, are also scheduled to be

remediated similar to safety-related systems.

In sum, the NRC believes that the actual scope of plant systems necessary to provide reasonable assurance of adequate protection to public health and safety, which are potentially susceptible to Y2K problems, is relatively limited and that the licensees' current activities are sufficient to ensure that Y2K problems will not adversely affect safety-related or balance-of-plant systems.

D. Public Comments

One public comment in support of the NIRS petition stated that embedded chips are difficult to identify and the effects of their failures are poorly understood, especially in the U.S. power grid. When the NRC staff was developing GL 98-01, it recognized that embedded systems pose a potential Y2K problem that must be recognized and addressed in any successful Y2K effort. Accordingly, GL 98-01 informed licensees that Y2K programs should be augmented to address remediation of embedded systems. Licensees have stated in their responses to the generic letter that embedded systems are being addressed in their Y2K programs, and these statements have been confirmed by NRC audits to date. NRC understands that the electric utilities providing power to the grid have similar efforts underway that are being monitored by the North American Electric Reliability Council.

One public comment in support of the petition indicated that the rule should require nuclear power plants to shut down 6 months before the end of 1999 to allow a safe period of time to shut down the plant. The NRC does not agree that it takes 6 months to safely shut down a plant. Under normal conditions, it takes several hours to safely shut down a nuclear power plant by reducing reactor power gradually. However, in an emergency, the reactor can be shut down safely within seconds, either automatically or manually. The reactor will be shut down automatically by the reactor protection system upon the sensing of an unusual condition. Moreover, the operator always has the capability to manually shut down the reactor using the reactor protection system. Accordingly, the NRC does not agree that it is necessary to shut down nuclear power plants 6 months before the end of 1999 in order to ensure a safe shutdown of the plants.

A commenter in favor of the petition stated that the Y2K problem could increase the chance of a meltdown. However, the commenter did not provide any basis for this assertion. The

NRC disagrees with the commenter. Safety functions performed by the reactor protection system for shutting down the reactor and by the engineered safety features actuation for mitigating accidents, cooling down the reactor, and providing emergency power to safety systems upon a loss of offsite power are not affected by the Y2K problem. Although there is some concern that the reliability of the offsite power sources may be lower during the Y2K transition, if a loss of offsite power were to occur because of Y2K, the plant would trip automatically because all nuclear plants are designed for such an event. The emergency onsite power supply system would provide power to the safety system equipment automatically. This sequence of events is not affected by the Y2K problem because all these safety systems do not rely upon computer-operated systems or components that are date-sensitive. For these reasons, the NRC disagrees that a Y2K problem could increase the probability of a core melt accident at a nuclear power plant.

One public comment in support of the petition indicated that the audits conducted by NRC staff are too few. The NRC has responded to this comment in section I.A.

E. Summary

The NRC believes that licensees' Y2K activities and programs, considered together with NRC oversight activities, provide a reasonable approach for ensuring that Y2K problems will not pose an unreasonable threat to public health and safety. NIRS has not explained why this regulatory approach will not provide reasonable assurance of adequate protection from any potential Y2K-initiated problems at operating nuclear power plants, such that the rule proposed by NIRS is necessary.

II. Part 50 Non-Power Reactor Licensees

NRC used several methods to inform all non-power reactor (NPR) licensees of the need to ensure that their facilities are ready for the year 2000. In 1996, NRC staff contacted all NPR licensees informing them of a potential for problems in systems either controlling or supporting the reactor because of Y2K issues. In December 1996, NRC issued IN 96-70 to alert nuclear facility licensees to the Y2K problem. IN 96-70 described the potential problems that nuclear power plant computer systems and software may encounter as a result of the change to the new century and how the Y2K issue may affect NRC licensees. IN 96-70 encouraged all licensees to examine their uses of computer systems and software well

before the year 2000. IN 96-70 also suggested that licensees consider appropriate actions for examining and evaluating their computer systems for Y2K vulnerabilities.

NRC also coordinated with the Organization of Test, Research and Training Reactors (TRTR) to distribute information about the Y2K problem through TRTR newsletters. These newsletters were distributed to all members of the organization to focus attention on the Y2K problem and related ongoing activities. The staff at all 37 licensees with operating reactors receive copies of the TRTR newsletter. The TRTR newsletters articles included "Concerns about the Millennium," February 1997; "Year 2000 Concerns," February 1998; "NRC Response on Year 2000," May 1998; "More on the Y2K Issue," August 1998; and "Another Y2000 Notice," November 1998. NRC staff has confirmed through several telephone conversations and discussions during inspections that all licensees of operating reactors are aware of the Y2K concerns and have ongoing actions to be Y2K ready by the end of the year or sooner.

Since 1998, while conducting inspections of NPR facilities, the NRC staff is also verifying that licensees are addressing the Y2K problem with regard to reactor safety. NRC staff has inspected about 50 percent of the operating reactors and intends to complete the inspections of all operating NPRs by October 1999. These inspections will verify that the licensees have programs to deal with Y2K and that all digital safety equipment at these facilities are considered in the program. Moreover, most institutions that operate the NPRs have their own Y2K programs that include the NPRs.

The safety systems at most operating reactors are analog systems that are not affected by the Y2K problem. Several operating reactors have digital safety equipment that provides instrument indication to the facility operator that is part of the licensee's Y2K program. Also, seven of these reactors have digital reactor protection system functions also considered in the licensee's Y2K program. These systems operate in parallel with the analog reactor protection systems, which are not affected by Y2K. Also, the digital systems initiate reactor scrams in case of a malfunction in the digital equipment. The analog systems generally provide the required reactor safety functions. The analog systems are independent of the digital equipment and have built-in redundancy to ensure that the reactor scrams. The power levels of these reactors are low (up to a maximum of

2 MWT) and many of them operate at low temperatures in relatively large pools of water. The only safety function that is generally required is for the reactor to scram. Thus, the Y2K concern poses very low risk. NIRS does not explain why the licensees' Y2K program activities and NRC's oversight of the licensees' implementation of the programs are inadequate such that the rule proposed by NIRS is necessary to provide reasonable assurance of adequate protection.

III. Part 50 Decommissioning Nuclear Power Plant Licensees

The suggested rule language in the petition would require that all facilities not compliant with Y2K issues be shut down by December 1, 1999. Nuclear power plants that are permanently shutdown with fuel removed from the reactor core would, therefore, not be subject to the rule as proposed by NIRS. However, since the purpose of the proposed rule appears to be directed to ensuring that Y2K problems at all nuclear power plants—both operating and decommissioning—will not pose a threat to public health and safety, the following discussion on the activities for addressing the Y2K problem at decommissioning nuclear power plants is provided.

There are two potential radiological health and safety concerns with respect to Y2K problems at decommissioning plants: (1) spent fuel storage, including site security; and (2) the actual conduct of dismantlement and decommissioning activities. Of greater concern is the spent fuel storage. The concerns in this area relate to providing sufficient cooling to the spent fuel and providing sufficient security against diversion and sabotage of the spent fuel. There are 21 decommissioning nuclear power plants that have been shut down more than a year, 6 of which have had spent fuel removed from the site. Accordingly, there are only 15 decommissioning nuclear power plants where spent fuel storage is of concern. Although licensees for all of these facilities are implementing Y2K programs, it is unlikely that Y2K problems would pose a significant problem to providing sufficient spent fuel cooling. First, electrical and makeup water systems for spent fuel pools are not computer-controlled. Moreover, even if there was an interruption in electrical power, there is a long time period for the licensee to respond to the problem before integrity of the spent fuel rods becomes an issue because sufficient time is available to take compensatory action before boiling starts. The spent fuel pool is conservatively estimated

(based on the Zion units) to begin boiling 68 hours after loss of the spent fuel pool cooling system. Boiling does not become a concern until the fuel rods begin to be uncovered by boil-off of cooling water. Since fuel rods are normally covered by 23 feet of water (for purposes of shielding), and it would take approximately two weeks or more to begin uncovering the spent fuel rods (assuming that no make-up water is added to the pool), the NRC believes that there is sufficient time to recover electrical power and/or provide makeup water to prevent the fuel rods from uncovering.

The other threat to spent fuel is diversion and sabotage. Licensees of decommissioning reactors are taking steps to ensure that Y2K problems will not disable necessary security and safeguards systems and controls. Licensees with computer-based site security systems that have been identified as potentially Y2K vulnerable have tested the system for Y2K, upgraded the system to be Y2K compliant, or will make the system Y2K compliant before the end of 1999.

With respect to the safety of conducting dismantlement and decommissioning activities, the NRC does not believe that these activities are subject to Y2K problems that would pose a threat to public health and safety because the conduct of these activities in the field do not rely upon computer-controlled devices to ensure protection against radiological dangers.

In sum, licensees of decommissioning nuclear power plants are implementing Y2K activities that address equipment and systems important to safety, such that there is reasonable assurance of adequate protection to public health and safety.

IV. Major Parts 40 and 70 Licensees

To alert major Parts 40 and 70 licensees of the potential Y2K problem, NRC issued Information Notice (IN) 96-70, "Year 2000 Effect on Computer System Software," dated December 24, 1996. IN 96-70 described the potential Y2K problems, encouraged licensees to examine their uses of computer systems and software well before the year 2000, and suggested that licensees consider appropriate actions to examine and evaluate their computer systems for Y2K vulnerabilities.

In order to gather Y2K information regarding materials and major fuel cycle facilities, NRC formed a Y2K Team within the Office of Nuclear Material Safety and Safeguards (NMSS) in 1997. From September 1997 through December 1997, this NMSS Y2K Team visited a cross-section of materials

licensees and fuel cycle facilities and conducted Y2K interviews. Each licensee or facility visited by the team indicated that they were aware of the Y2K issue and were in various stages of implementing their Y2K readiness program.

On June 22, 1998, the NRC staff issued Generic Letter (GL) 98-03, "NMSS Licensees' and Certificate Holders' Year 2000 Readiness Programs." This GL requested major Parts 40 and 70 licensees to submit by September 20, 1998, written responses regarding their facility-specific Y2K readiness program in order to confirm that they were addressing the Y2K problem effectively. All licensees responded to GL 98-03 by stating that they have adopted a facility-specific Y2K readiness program and that the scope of the program included identifying and, where appropriate, remediating hardware, software, and embedded systems, and provided for risk management and the development of contingency plans.

GL 98-03 also requested a written response, no later than December 31, 1998, which confirmed that these facilities were Y2K ready or provided a status report of work remaining to be done to become Y2K ready, including completion schedules. All licensees provided a second response to GL 98-03, which identified work remaining to be done, including completion schedules. Furthermore, following the second response, NRC requested a third written response, no later than July 1, 1999, which would confirm that these facilities are Y2K ready or would provide an updated status report.

On August 12, 1998, IN 98-30, "Effect of the Year 2000 Computer Problem on NRC Licensees and Certificate Holders," provided licensees additional information on the Y2K issue. IN 98-30 provided definitions of "Y2K ready" and "Y2K compliant," encouraged licensees to contact vendors and test their systems for Y2K problems, and described elements of a Y2K readiness program.

Between September 1997 and October 1998, the major Parts 40 & 70 licensees were also asked Y2K questions during other inspections. Based on these Y2K inspections, the licensees were aware of the Y2K problem and were adequately addressing Y2K issues. There have been no identified risk-significant Y2K concerns for major Parts 40 and 70 licensees.

NIRS' proposed rule would require that licensees be shutdown by December 1, 1999, unless licensees demonstrate that "Y2K compliance" has been achieved. However, NIRS has not

explained why "Y2K compliance" as opposed to "Y2K readiness" is necessary. NIRS asserted that NRC has not made explicit how it will define "Y2K compliance." However, NRC explicitly defined the terms "Y2K ready" and "Y2K compliant" in GL 98-03. "Y2K ready" was defined as a computer system or application that has been determined to be suitable for continued use into the year 2000, even though the computer system or application is not Y2K compliant. "Y2K compliant" was defined as a computer system or application that accurately processes date/time data (including, but not limited to, calculating, comparing, and sequencing) from, into, and between the years 1999 and 2000, and beyond, including leap-year calculations. Thus, by definition, systems that are "Y2K ready" are able to perform their functions properly. There is no discernable safety reason why achieving Y2K readiness rather than Y2K compliance should result in facility shutdown. Accordingly, there is no basis for requiring facility shutdown if a licensee cannot demonstrate Y2K compliance.

NIRS presents no information or argument why those actions by the licensees and NRC described above are insufficient to address Y2K problems and to demonstrate that reasonable assurance of adequate protection will not be provided after December 1, 1999, so that facility shutdown is necessary.

V. Part 30 and Minor Parts 40 and 70 Licensees

To alert Part 30 and minor Parts 40 and 70 licensees, the NRC issued INs 96-70 and 98-30, which have been discussed in Section IV, "Major Parts 40 and 70 Licensees."

In addition to the efforts by the NMSS Y2K Team to gather information regarding materials licensees and major fuel facilities from September through December 1997, discussed under Section IV, NMSS staff also conducted telephone interviews with device manufacturers and distributors. Further, NRC determined that few of approximately 5,800 materials licensees use processes or have safety systems that are computer-controlled, thus minimizing potential Y2K impacts. The interviews and site visits confirmed that licensees were identifying and addressing potential Y2K problems.

From the interviews conducted by the NMSS Y2K Team, NRC learned that early versions of some treatment planning systems (computer systems for calculating dose to medical patients being treated with radiation or radioactive material) have Y2K

problems and that upgrades for treatment planning systems were available. However, treatment planning systems are regulated by the U.S. Food and Drug Administration (FDA) and not by NRC because the systems do not contain licensed material. NRC has shared information on non-Y2K-compliant treatment planning systems with the FDA. For materials licensees, the NMSS Y2K Team did not identify any Y2K issues for NRC-regulated material. As a result of the interviews and site visits, NRC's focus has been to determine if any commercially available devices (medical and industrial) have potential Y2K vulnerabilities and to ensure that licensees evaluate self-developed systems, commercial off-the-shelf software and hardware, and safety systems.

In addition to Y2K interviews, materials inspectors have been instructed to confirm receipt of NRC's information notices, determine whether the licensees have identified any potential problems associated with the Y2K issue, and note any corrective actions taken by the licensees. Through the routine inspection process, NRC has made assessments of the Y2K status of its materials licensees and continues to do so. To date, only the treatment planning systems described above, dose calibrators, and a tote position display for an irradiator have been identified through the inspection process as having Y2K problems. NRC materials inspectors have indicated that licensees are aware of available upgrades for treatment planning systems and dose calibrators. The irradiator tote position display is not a safety system. Further, the irradiator tote position display system that had the Y2K problem was a one-of-a-kind modification made by the licensee (the licensee was authorized by NRC to make the modification). The irradiator licensee is updating the tote position display system to eliminate the Y2K problem. No generic Y2K issues for NRC-regulated material used by materials licensees have been identified.

NIRS asserted that NRC has not made explicit what it plans to do about those facilities that cannot prove compliance. As discussed in Section IV, "Major Parts 40 and 70 Licensees" above, NIRS has not explained why "Y2K compliance" as opposed to "Y2K readiness" is necessary. Furthermore, Y2K readiness is not required for protection of public health and safety for Part 30 and minor Parts 40 and 70 licensees due to the amount and type of licensed material used by them. The risks to the public from these facilities are low. In addition, NRC has determined that few of the

approximately 5,800 materials licensees use processes or have safety systems that are computer-controlled, thus minimizing potential Y2K impacts. Accordingly, there is no basis for requiring facility shutdown if a licensee cannot demonstrate "Y2K compliance."

NIRS presents no information or argument why those actions by the licensees and NRC described above are insufficient to address Y2K problems and to demonstrate that reasonable assurance of adequate protection will not be provided after December 1, 1999, so that facility shutdown is necessary.

VI. Public Information

NIRS requested in item (c) of its petition that NRC adopt regulations that would require that licensees make available to the public by December 1, 1999, all information related to the examination and repair, modification, and/or replacement of all computer systems, embedded chips, and other electronic equipment that may be date-sensitive. NIRS indicated that this rule provision is necessary in order to allow "independent experts" and the public to examine this information.

The NRC has already made available to the public substantial information on Y2K and the status of licensees' activities to address potential Y2K problems and will continue to make this information public. The audit reports of the NRC staff reviews of the 12 nuclear power plant-specific Y2K readiness project activities and documentation are publicly available both in the Public Document Rooms and the NRC Year 2000 Web site. The Y2K readiness information submitted in July 1999 by nuclear power plant licensees under GL 98-01, Supplement 1, is available to the public, as with any other correspondence that is received from licensees. The reports documenting the NRC staff audits of the six nuclear power plant-specific contingency planning activities and the results of the facility-specific Y2K program reviews of all operating nuclear power plants are also available to the public. The NRC inspection reports with Y2K information from Parts 30, 40, and 70 licensees and the licensees' responses to GL 98-03 have been placed in the PDR. Summaries of (1) inspection reports with Y2K information, (2) GL 98-03 responses, and (3) interviews with a cross-section of materials and fuel cycle licensees on Y2K issues are available on the NRC Year 2000 Web site.

In view of the information that has been made available and will be made available to the public, NIRS has not provided any basis for requiring licensees, by rule, to provide public

access to Y2K information beyond that which the NRC has determined must be submitted to the NRC in furtherance of the NRC's regulatory oversight.

Conclusion

The rule proposed by NIRS is not needed because the Commission has determined that the activities taken by licensees to implement a systematic and structured facility-specific Y2K readiness program, together with the NRC's oversight of the licensees' implementation of these Y2K readiness programs, provide reasonable assurance of adequate protection to public health and safety.

For these reasons, the Commission denies the petition.

Dated at Rockville, Maryland, this 17th day of August, 1999.

For the Nuclear Regulatory Commission.

Andrew L. Bates,

Acting Secretary of the Commission.

[FR Doc. 99-21750 Filed 8-20-99; 8:45 am]

BILLING CODE 7590-01-P

NUCLEAR REGULATORY COMMISSION

10 CFR Part 35

[Docket No. PRM-35-15]

Jeffery C. Angel; Receipt of Petition for Rulemaking

AGENCY: Nuclear Regulatory Commission.

ACTION: Petition for rulemaking; Notice of receipt.

SUMMARY: The Nuclear Regulatory Commission (NRC) has received and requests public comment on a petition for rulemaking filed by Jeffery C. Angel. The petition has been docketed by the Commission and has been assigned Docket No. PRM-35-15. The petitioner requests that the NRC amend its regulations concerning the medical use of byproduct material to prohibit the hand-held administration of radiopharmaceuticals by injection and to require the use of the Angel Shield, a device to administer radioactive substances. The petitioner requests that the NRC take this action to make the administration of radiopharmaceuticals by injection safer.

DATES: Submit comments by November 8, 1999. Comments received after this date will be considered if it is practical to do so, but assurance of consideration cannot be given except as to comments received on or before this date.

ADDRESSES: Submit comments to: Secretary, U.S. Nuclear Regulatory

Commission, Washington, DC 20555. Attention: Rulemakings and Adjudications staff.

Deliver comments to 11555 Rockville Pike, Rockville, Maryland, between 7:30 am and 4:15 pm on Federal workdays.

For a copy of the petition, write to David L. Meyer, Chief, Rules and Directives Branch, Division of Administrative Services, Office of Administration, U.S. Nuclear Regulatory Commission, Washington, DC 20555-0001.

You may also provide comments via the NRC's interactive rulemaking website at <http://ruleforum.llnl.gov>. This site provides the capability to upload comments as files (any format), if your web browser supports that function. For information about the interactive rulemaking website, contact Ms. Carol Gallagher, (301) 415-5905 (e-mail: CAG@nrc.gov).

FOR FURTHER INFORMATION CONTACT:

David L. Meyer, Office of Administration, U.S. Nuclear Regulatory Commission, Washington, DC 20555. Telephone: 301-415-7162 or Toll-free: 1-800-368-5642 or E-mail: DLM1@NRC.GOV.

SUPPLEMENTARY INFORMATION:

Background

On June 29, 1999, the Nuclear Regulatory Commission (NRC) received a petition for rulemaking submitted by Jeffery C. Angel. The petitioner requests that the NRC amend its regulations concerning the medical use of byproduct material to prohibit the hand-held administration of radiopharmaceuticals by injection and require the use of the Angel Shield, a device to administer radioactive substances. The petitioner requests that the NRC take this action to make the administration of radiopharmaceuticals by injection safer. The petition has been docketed as PRM-35-15. The NRC is soliciting public comment on the petition for rulemaking.

The NRC's regulations governing the medical use of byproduct material appear in 10 CFR Part 35. Paragraph (c) of § 35.60 requires that an individual use a syringe radiation shield when administering a radiopharmaceutical by injection unless the use of the shield is contraindicated for that patient or human research subject.

Discussion

The petitioner states that the current practice of placing the radiopharmaceutical into a syringe radiation shield and delivering a hand-held injection places the person administering the substance in direct

[Federal Register: August 23, 1999 (Volume 64, Number 162)]

[Proposed Rules]

[Page 45908-45911]

From the Federal Register Online via GPO Access [wais.access.gpo.gov]

[DOCID: **fr23au99-22**]

NUCLEAR REGULATORY COMMISSION

10 CFR Part 50

[Docket No. PRM-50-66]

Nuclear Information and Resource Service; Petition for Rulemaking Denial

AGENCY: Nuclear Regulatory Commission.

ACTION: Petition for rulemaking; denial.

SUMMARY: The Nuclear Regulatory Commission (NRC) is denying a petition for rulemaking (PRM-50-66) from the Nuclear Information and Resource Service (NIRS). The petitioner requested that NRC amend its regulations to require licensees of operating nuclear power plant facilities to conduct a full-scale emergency planning exercise that involves coping with a date-sensitive, computer-related failure resulting from a Year 2000 (Y2K) issue. The petitioner requested that NRC take this action to ensure that licensees of nuclear facilities have developed and can implement adequate contingency and emergency plans to address potential major system failures that may be caused by a Y2K computer problem. NRC is denying the petition because the Commission has determined that the actions taken by the licensees to implement systematic and structured Y2K readiness contingency plans for critical Y2K dates in concert with existing required emergency response plans and procedures, and NRC's oversight of the licensees' implementation of these Y2K readiness contingency plans provide reasonable assurance of adequate protection to public health and safety.

ADDRESSES: Copies of the petition for rulemaking, the public comments received, and the NRC's letters to the petitioners are available for public inspection or copying in the NRC Public Document Room, 2120 L Street, NW. (Lower Level), Washington, DC, as well as NRC's rulemaking web site at <http://ruleforum.llnl.gov>.

FOR FURTHER INFORMATION CONTACT: Matthew Chiramal, Office of Nuclear Reactor Regulation, U.S. Nuclear Regulatory Commission, Washington, DC 20555-0001, telephone 301-415-2845, E-mail address mxc@nrc.gov.

SUPPLEMENTARY INFORMATION:

Background

NRC received three related petitions for rulemaking (PRM-50-65, PRM-50-66, and PRM-50-67), each dated December 10, 1998, submitted by the NIRS concerning various aspects of Y2K issues and nuclear safety. This petition (PRM-50-66) requested that NRC adopt regulations that would require facilities licensed by NRC under 10 CFR Part 50 to develop and implement adequate contingency and emergency plans to address potential system failures. The first petition (PRM-50-65) requested that NRC adopt regulations that would require facilities licensed by NRC under 10 CFR Parts 30, 40, 50, and 70 to be Y2K compliant. The third petition (PRM-50-67) requested that NRC adopt regulations that would require facilities licensed by NRC under 10 CFR Parts 50

[[Page 45909]]

and 70 to provide reliable sources of backup power.

Because of the nature of these petitions and the date-specific issues they address, the petitioner requested that the petitions be addressed on an expedited schedule.

On January 25, 1999, NRC published a notice of receipt of this petition for rulemaking in the Federal Register (64 FR 3791). It was available on the NRC's rulemaking website and NRC Public Document Room. The notice of receipt of petition for rulemaking invited interested persons to submit comments by February 24, 1999.

The Petition

The petitioner requested that NRC adopt the following text as a rule: ¹

\1\ In preliminary discussion, the petitioner stated, ``We also believe that other major fuel cycle facilities should be subject to a similar rule.'' However, the petitioner provided no supporting reasoning, no regulatory text, and no specific request that NRC adopt such a rule. Therefore, NRC has considered only the specifically requested rule language.

All licensees subject to 10 CFR Part 50 and Appendix E will

conduct a full-scale emergency planning exercise (as normally required under 10 CFR 50.47) during 1999. This exercise shall include a component that includes failure of one or more computer or other digital systems (this is popularly known as the ``Y2K bug'') on January 1, 2000, or other relevant date. Licensees that do not conduct, or that fail, this exercise shall close their facilities licensed under this Part by December 1, 1999, until such time as the licensees have conducted a successful exercise.

NRC shall publish and provide to each licensee, within 30 days of the date of this rule, a Regulatory Guide that outlines potential emergency exercise scenarios. NRC shall publish and provide to each licensee, by December 1, 1999, a Regulatory Guide that describes the various scenarios that have been undertaken and the successful (and unsuccessful) responses to the problems posed.

The petitioner stated that although the probability of the occurrence of Y2K-related events that would require emergency response and the implementation of contingency plans is unknown, it would fall within the range of safety matters for which NRC requires emergency planning exercises. Furthermore, the petitioner asserts that addressing Y2K-related problems will require the use of potentially unfamiliar contingency plans, relying on ingenuity to circumvent failure of essential communications systems or failure of offsite emergency responders to perform their tasks effectively and coping with issues not normally tested during emergency exercises.

The petitioner considers it prudent to require each licensee to conduct an exercise and that each exercise address a different aspect of the Y2K problem. The petitioner suggested that some exercises should test problems initiated by Y2K-related failures and that others should test problems exacerbated by Y2K-related failures. The petitioner believes that this approach would provide some familiarity with the possible range of issues that could develop and create an overall industry capability to effectively address potential Y2K problems.

Under the petitioner's suggested regulation, the licensees would develop exercise scenarios that would be approved by NRC in an expedited fashion, and NRC would publish and distribute regulatory guides that would outline potential emergency response scenarios and describe the scenarios that were tested and the successful responses to the problem posed.

The petitioner stated that these actions would provide reasonable assurance that nuclear power plant licensees have developed and can implement adequate contingency and emergency plans to address major system failures that may be caused by the Y2K problem.

Public Comments on the Petition

In response to this petition, NRC received 64 comment letters, including 1 letter signed by 25 citizens from the State of Michigan, 3

from nuclear associated industries, 11 from utilities, 13 from private organizations, 1 from the State of Illinois Department of Nuclear Safety, and 35 from private citizens.

Forty-six letters supported the petition, of which 13 were from private organizations, 32 were from private citizens, and one which was signed by 25 citizens of the State of Michigan. Thirty-nine of these 46 letters communicated a brief statement in support of the petition. Seven of the 46 letters, of which 3 were from private individuals and 4 were from private organizations, discussed reasons for supporting the petition.

In some letters, support of the petition was based on belief that actual emergency response exercises will provide invaluable information in addressing Y2K issues because of the complexity of Y2K issues and the lack of experience of licensees of nuclear facilities in responding to such an event.

Others letters stated that all emergency plans rely heavily on offsite sources of help, such as police, fire, and other essential services, but that these services, as well as critical communications entities, may also be vulnerable to the Y2K problem if they are not properly assessed, remedied, and tested. Some letters cited numerous problems that have occurred in previous emergency planning exercises, irrespective of the Y2K problem. An example stated was the Pilgrim exercise of December 13, 1995, in which the Boston Edison Company was unable to communicate to the proper authorities. Other examples cited the occurrence of lost electrical buses. Some letters communicated the importance of testing and retesting for every conceivable contingency.

Eighteen letters opposed the petition, of which 3 were from private citizens, 3 were from nuclear associated industries, one was from the State of Illinois Department of Nuclear Safety, and 11 were from utilities. The letters opposing the petition stated that the additional emergency planning exercise suggested by the petition is not needed to ensure public health and safety. These letters indicated that NRC analysis and industry testing have confirmed that safety systems will function to shut down a reactor if required, that licensees and NRC are developing contingency plans for key Y2K rollover dates, and that these contingency plans will evaluate specific risk factors and, where appropriate, provide mitigation strategies to allow continued safe operation. These letters stated that this effort provides a rational review and systematic approach to issues that could affect the continued safe operation of a plant within the conditions of its license, which the commenters believe is a more effective approach for ensuring that plants continue to operate and meet commitments.

Reasons for Denial

Pursuant to 10 CFR 50.47, ``Emergency Plans''; 10 CFR 50.54, ``Conditions of Licenses,'' paragraphs (q), (s), and (t); and Appendix E to 10 CFR Part 50, nuclear facilities are required to provide

emergency response capabilities that take into account a variety of circumstances and challenges, to exercise their plans periodically to develop and maintain key skills of involved personnel, and to identify deficiencies in the emergency plan and personnel and take appropriate actions to correct identified deficiencies. In accordance with 10 CFR 50.54(q), nuclear power reactor licensees are required to follow and maintain in effect emergency plans that meet the planning standards in 10 CFR 50.47(b) and the requirements of Appendix E to Part 50. In part, licensees are required to train

[[Page 45910]]

and test their organization and associated equipment to ensure that under all conditions and contingencies, such as power outages and computer and communication failures, appropriate emergency response is available and effective in an emergency.

To accomplish these requirements, licensees conduct numerous exercises and drills throughout the year. Inherent in the nature of emergency response is the realization that in an emergency, equipment may fail, loss of power may occur, personnel may not be available, and weather conditions may cause the emergency or escalate it. It is typical that, in the development of scenarios for exercises and drills, as well as in employee training programs, communication links, plant computers, and display and monitoring equipment are ``out of service'' or ``fail'' at inappropriate times. The NRC staff commonly oversees exercises that include these types of problems and the licensee's staff benefits from having to work around this training obstacle when a particular approach has been blocked. The NRC staff has observed licensees resorting to manual and backup systems to respond effectively and overcome these obstacles.

In terms of the effects of the Y2K problem, the NRC staff believes that the Y2K problem is not unique--it is a software error. Although the cause of computer and equipment failure may be different under Y2K, the result and the expected response are the same as situations encountered during many previous emergency exercises and drills. Therefore, there is no need to require licensees to conduct additional exercises to test specifically for potential Y2K failures.

In addition to existing emergency response plans, licensees of operating nuclear power plants and decommissioning power plants where spent fuel is stored at the plant site are preparing and implementing Y2K contingency plans as part of the plant-specific Y2K program. Operating nuclear power plant-specific Y2K contingency plans are based on the guidance in Nuclear Energy Institute/Nuclear Utilities Software Management Group NEI/NUSMG 98-07, ² ``Nuclear Utility Year 2000 Readiness Contingency Planning,' ' dated August 1998, which provides a process and a method for preparing and implementing a facility-specific integrated contingency plan that considers specific risks from internal and external sources. The Y2K contingency plans are

generally built upon existing contingency activities (such as emergency preparedness, disaster recovery, storm damage restoration, grid restoration, and station blackout) and plant emergency procedures, coupled with the consideration that potential Y2K-related failures could affect many systems and components. Among the external events that are considered for contingency planning are--

\2\ NEI/NUSMG 98-07 was preceded by NEI/NUSMG 97-07, ``Nuclear Utility Year 2000 Readiness,'' dated October 1997, which presented a strategy for developing and implementing a nuclear utility Y2K program.

<bullet> the loss of emergency plan equipment and services: pagers, radios, sirens and meteorology information, and

<bullet> the loss of essential services: telephone, microwave, water, satellites, networks, security, police, and fire-fighting capability.

The need for simulated exercises, development of special procedures, and Y2K contingency plan specific training is considered in the Y2K contingency planning process. Contingency plan verification is included in NEI/NUSMG 98-07 guidelines to provide confidence that the plans can be executed as intended. The contingency planning efforts, as outlined in NEI/NUSMG 98-07, provide additional training, staffing, and material procurement for occurrences that could happen at any time but that have a higher probability of occurring during the critical Y2K-related dates. Licensees and NRC are currently developing contingency plans for critical Y2K rollover dates. These contingency plans evaluate specific risk factors and, where appropriate, provide mitigation strategies to cope with plant-specific effects of the most probable and serious failures that might be initiated or exacerbated by the Y2K problem.

On May 11, 1998, NRC issued Generic Letter (GL) 98-01, ``Year 2000 Readiness of Computer Systems at Nuclear Power Plants.'' In GL 98-01, NRC requested that all operating nuclear power plant licensees submit written responses regarding their facility-specific Y2K readiness programs in order to obtain confirmation that licensees are addressing the Y2K problem effectively. All licensees have responded to GL 98-01, stating that they have adopted plant-specific programs that are intended to make the plants Y2K ready by July 1, 1999. These programs are patterned on industry guidelines (NEI/NUSMG 97-07, ``Nuclear Utilities Year 2000 Readiness'') that have been found acceptable by NRC. GL 98-01 also requests a written response, no later than July 1, 1999, confirming that these facilities are Y2K ready, including contingency planning. Licensees who are not Y2K ready by July 1, 1999, must provide a status report and schedule for the remaining work to ensure timely Y2K readiness.

NRC considers the guidance in NEI/NUSMG 98-07, when properly implemented, as an acceptable approach for licensees to mitigate and manage Y2K-induced events that could occur on Y2K-critical dates.

As part of its oversight of licensee Y2K program activities, NRC staff audited the contingency planning effort of six licensee facilities. These audits were completed during June 1999. These audits focused on the licensee's approach to addressing both internal and external Y2K risks to safe plant operation, based on the guidance in NEI/NUSMG 98-07. The audits at these facilities examined in detail back-up measures the utilities have in place to deal with possible Y2K problems, either on site or off site, including problems with the loss of emergency plan equipment and services (pagers, radios, sirens, and meteorology), the loss of essential services (telephone, microwave, water, satellites, networks, security, police), and the failure of the offsite emergency responders to perform their task effectively.

Additionally, NRC regional staff reviewed Y2K activities at all operating nuclear power plants to verify the status of licensee efforts to ensure that all plants will be able to function safely on January 1, 2000, and beyond. The reviews: (1) verify that all NRC licensees have implemented Y2K program activities; (2) evaluate the progress they have made to ensure that they are on schedule to achieve Y2K readiness; and (3) assess their contingency plans for addressing Y2K-related issues. The regional staff is using guidance prepared by the NRC Headquarters staff that is based on NRC GL 98-01, NEI/NUSMG 97-07, and NEI/NUSMG 98-07. These reviews were completed by July 1999.

The offsite components of emergency preparedness and response, which are the responsibility of States, counties, and municipalities, are already utilized by those governmental entities to address a wide range of events (e.g., grid failures, tornadoes, floods, hurricanes, snowstorms, industrial accidents). These events often involve widespread loss of normal capabilities and services (e.g., loss of electricity and telephone service, blocking of roads) coupled with the need for a multi-capability response. NRC is also working closely with the Federal Emergency Management Agency (FEMA) on its plans to conduct Y2K workshops for the State and local radiological emergency preparedness community. NRC and nuclear facilities licensees will participate in these workshops. NRC is an active member of

[[Page 45911]]

the Emergency Services Sector Working Group for Y2K, which is headed by FEMA. In addition, to facilitate Agreement State efforts to address the Y2K issue, a link to State Government Year 2000 Web sites has been provided by the NRC. NRC will make every effort to share with the States any Y2K issue that may also affect Agreement States or Agreement State licensees.

NIRS has not explained why the approach currently being pursued by the licensees, the nuclear industry, and NRC does not provide

reasonable assurance of adequate emergency response capabilities during the transition from 1999 to 2000.

In the case of research and training/test reactors, licensees of these facilities also have established programs to evaluate and correct Y2K deficiencies. Many research reactors will be shut down on January 1, 2000, as the institutions operating them (e.g., universities and laboratories) will be closed for the holiday. Further, these reactors often have passive safety features and low power levels, which ensure minimal potential offsite consequences. In addition, NRC staff concluded that any research reactor in operation on January 1, 2000, could be readily shut down manually using emergency procedures and existing shutdown systems, even if their operational systems should experience a Y2K problem.

Conclusion

Plant-specific industry planning for Y2K contingencies, which is built upon existing emergency response plans and procedures required by the current emergency preparedness regulations, provides a reasonable assurance that adequate protection measures will be taken in the event of radiological emergency during Y2K critical dates. Imposing a new prescriptive rule as proposed in the petition in an area in which the industry action is already exceeding the actions that address the petitioner's general issues would be counterproductive to the ongoing Y2K readiness efforts of the licensees. Therefore, the additional full-scale emergency planning exercise requested by the NIRS is not necessary to ensure emergency response capabilities to provide reasonable assurance of adequate protection to public health and safety despite the occurrence of Y2K problems.

For these reasons, the Commission denies the petition.

Dated at Rockville, Maryland, this 17th day of August, 1999.

For the Nuclear Regulatory Commission.

Andrew L. Bates,

Acting Secretary of the Commission.

[FR Doc. 99-21751 Filed 8-20-99; 8:45 am]

BILLING CODE 7590-01-P

and immediate contact with the radiopharmaceutical. The petitioner contends that this practice results in the unnecessary exposure of this individual to radiation. The petitioner asserts that the design and engineering of syringe radiation shields is not based on sound radiation protection principles. The petitioner further states that current syringe designs violate the fundamental radiation principles of time, shielding, and distance. The petitioner states that syringe radiation shields provide inadequate radiation protection because—

1. They are hand held, thereby placing an administrator in direct and immediate contact with the radioactive substance;
2. They must be light enough so that they are not cumbersome to work with and consequently, they do not incorporate enough shielding to protect administrators adequately; and
3. There is no shielding at the distal or proximal portions of the shield, which results in direct and unnecessary radiation exposure.

The petitioner refers to the provisions of 10 CFR 20.1101(b) that require licensees to use procedures and engineering controls based on sound radiation protection principles to achieve occupational dose rates that are as low as is reasonably achievable (ALARA).

The Petitioner's Request

The petitioner requests that the NRC amend its regulations concerning the medical use of byproduct material to prohibit the hand-held administration of radiopharmaceuticals by injection. As an alternative, the petitioner suggests that the NRC require the use of the Angel Shield, a radioactive substance administrator that eliminates the hand-held administration of radiopharmaceuticals by injection. The petitioner believes that radiation exposure rates would be immediately and substantially reduced through the use of the Angel Shield. The petitioner asserts that the Angel Shield reduces radiation exposure by—

1. Eliminating the hand-held injection of radiopharmaceuticals;
2. Encapsulating the syringe within the administrator completely thereby providing 360 degrees of protection;
3. Shielding 100 percent of low-energy emissions (140 keV) and 88 percent of high-energy emissions (511 keV);
4. Allowing for the remote administration of the radiopharmaceutical; and

5. Reducing the number of missed injections and subsequent multiple exposures.

The petitioner explains that the Angel Shield uses 1/2-inch lead walls that completely encapsulate the radiopharmaceutical. The petitioner further explains that the entire administration process is mechanized. This removes the occupational worker from direct and immediate contact with the radioactive substance. As a result, radiation exposure rates are substantially and immediately reduced.

The petitioner contends that the reduction of unnecessary radiation exposure when administering radiopharmaceuticals by injection is of critical importance as the practice of nuclear medicine evolves toward therapeutic applications and the administration of medium and high-energy radiopharmaceuticals. The petitioner states that the one of the NRC's primary duties is to establish regulations on the safe use of nuclear materials. The petitioner contends that prohibiting the hand-held administration of radiopharmaceuticals by injection and requiring the use of the Angel Shield makes the administration of radiopharmaceuticals safer and furthers the goals of ALARA by reducing occupational dose rates.

The Petitioner

The petitioner has been a nuclear medicine technologist for over twenty years and has been exposed to radiation on a recurrent daily basis. He invented a radioactive substance administrator, the Angel Shield, to protect himself and others from unnecessary radiation exposure when administering radiopharmaceuticals by injection.

Dated at Rockville, Maryland, this 17th day of August, 1999.

For the Nuclear Regulatory Commission.

Andrew L. Bates,

Acting Secretary of the Commission.

[FR Doc. 99-21792 Filed 8-20-99; 8:45 am]

BILLING CODE 7590-01-P

NUCLEAR REGULATORY COMMISSION

10 CFR Part 50

[Docket No. PRM-50-66]

Nuclear Information and Resource Service; Petition for Rulemaking Denial

AGENCY: Nuclear Regulatory Commission.

ACTION: Petition for rulemaking; denial.

SUMMARY: The Nuclear Regulatory Commission (NRC) is denying a petition

for rulemaking (PRM-50-66) from the Nuclear Information and Resource Service (NIRS). The petitioner requested that NRC amend its regulations to require licensees of operating nuclear power plant facilities to conduct a full-scale emergency planning exercise that involves coping with a date-sensitive, computer-related failure resulting from a Year 2000 (Y2K) issue. The petitioner requested that NRC take this action to ensure that licensees of nuclear facilities have developed and can implement adequate contingency and emergency plans to address potential major system failures that may be caused by a Y2K computer problem. NRC is denying the petition because the Commission has determined that the actions taken by the licensees to implement systematic and structured Y2K readiness contingency plans for critical Y2K dates in concert with existing required emergency response plans and procedures, and NRC's oversight of the licensees' implementation of these Y2K readiness contingency plans provide reasonable assurance of adequate protection to public health and safety.

ADDRESSES: Copies of the petition for rulemaking, the public comments received, and the NRC's letters to the petitioners are available for public inspection or copying in the NRC Public Document Room, 2120 L Street, NW, (Lower Level), Washington, DC, as well as NRC's rulemaking web site at <http://ruleforum.llnl.gov>.

FOR FURTHER INFORMATION CONTACT: Matthew Chiramal, Office of Nuclear Reactor Regulation, U.S. Nuclear Regulatory Commission, Washington, DC 20555-0001, telephone 301-415-2845, E-mail address mxn@nrc.gov.

SUPPLEMENTARY INFORMATION:

Background

NRC received three related petitions for rulemaking (PRM-50-65, PRM-50-66, and PRM-50-67), each dated December 10, 1998, submitted by the NIRS concerning various aspects of Y2K issues and nuclear safety. This petition (PRM-50-66) requested that NRC adopt regulations that would require facilities licensed by NRC under 10 CFR Part 50 to develop and implement adequate contingency and emergency plans to address potential system failures. The first petition (PRM-50-65) requested that NRC adopt regulations that would require facilities licensed by NRC under 10 CFR Parts 30, 40, 50, and 70 to be Y2K compliant. The third petition (PRM-50-67) requested that NRC adopt regulations that would require facilities licensed by NRC under 10 CFR Parts 50

and 70 to provide reliable sources of backup power.

Because of the nature of these petitions and the date-specific issues they address, the petitioner requested that the petitions be addressed on an expedited schedule.

On January 25, 1999, NRC published a notice of receipt of this petition for rulemaking in the **Federal Register** (64 FR 3791). It was available on the NRC's rulemaking website and NRC Public Document Room. The notice of receipt of petition for rulemaking invited interested persons to submit comments by February 24, 1999.

The Petition

The petitioner requested that NRC adopt the following text as a rule:¹

All licensees subject to 10 CFR Part 50 and Appendix E will conduct a full-scale emergency planning exercise (as normally required under 10 CFR 50.47) during 1999. This exercise shall include a component that includes failure of one or more computer or other digital systems (this is popularly known as the "Y2K bug") on January 1, 2000, or other relevant date. Licensees that do not conduct, or that fail, this exercise shall close their facilities licensed under this Part by December 1, 1999, until such time as the licensees have conducted a successful exercise.

NRC shall publish and provide to each licensee, within 30 days of the date of this rule, a Regulatory Guide that outlines potential emergency exercise scenarios. NRC shall publish and provide to each licensee, by December 1, 1999, a Regulatory Guide that describes the various scenarios that have been undertaken and the successful (and unsuccessful) responses to the problems posed.

The petitioner stated that although the probability of the occurrence of Y2K-related events that would require emergency response and the implementation of contingency plans is unknown, it would fall within the range of safety matters for which NRC requires emergency planning exercises. Furthermore, the petitioner asserts that addressing Y2K-related problems will require the use of potentially unfamiliar contingency plans, relying on ingenuity to circumvent failure of essential communications systems or failure of offsite emergency responders to perform their tasks effectively and coping with issues not normally tested during emergency exercises.

¹ In preliminary discussion, the petitioner stated, "We also believe that other major fuel cycle facilities should be subject to a similar rule." However, the petitioner provided no supporting reasoning, no regulatory text, and no specific request that NRC adopt such a rule. Therefore, NRC has considered only the specifically requested rule language.

The petitioner considers it prudent to require each licensee to conduct an exercise and that each exercise address a different aspect of the Y2K problem. The petitioner suggested that some exercises should test problems initiated by Y2K-related failures and that others should test problems exacerbated by Y2K-related failures. The petitioner believes that this approach would provide some familiarity with the possible range of issues that could develop and create an overall industry capability to effectively address potential Y2K problems.

Under the petitioner's suggested regulation, the licensees would develop exercise scenarios that would be approved by NRC in an expedited fashion, and NRC would publish and distribute regulatory guides that would outline potential emergency response scenarios and describe the scenarios that were tested and the successful responses to the problem posed.

The petitioner stated that these actions would provide reasonable assurance that nuclear power plant licensees have developed and can implement adequate contingency and emergency plans to address major system failures that may be caused by the Y2K problem.

Public Comments on the Petition

In response to this petition, NRC received 64 comment letters, including 1 letter signed by 25 citizens from the State of Michigan, 3 from nuclear associated industries, 11 from utilities, 13 from private organizations, 1 from the State of Illinois Department of Nuclear Safety, and 35 from private citizens.

Forty-six letters supported the petition, of which 13 were from private organizations, 32 were from private citizens, and one which was signed by 25 citizens of the State of Michigan. Thirty-nine of these 46 letters communicated a brief statement in support of the petition. Seven of the 46 letters, of which 3 were from private individuals and 4 were from private organizations, discussed reasons for supporting the petition.

In some letters, support of the petition was based on belief that actual emergency response exercises will provide invaluable information in addressing Y2K issues because of the complexity of Y2K issues and the lack of experience of licensees of nuclear facilities in responding to such an event.

Others letters stated that all emergency plans rely heavily on offsite sources of help, such as police, fire, and other essential services, but that these services, as well as critical

communications entities, may also be vulnerable to the Y2K problem if they are not properly assessed, remedied, and tested. Some letters cited numerous problems that have occurred in previous emergency planning exercises, irrespective of the Y2K problem. An example stated was the Pilgrim exercise of December 13, 1995, in which the Boston Edison Company was unable to communicate to the proper authorities. Other examples cited the occurrence of lost electrical buses. Some letters communicated the importance of testing and retesting for every conceivable contingency.

Eighteen letters opposed the petition, of which 3 were from private citizens, 3 were from nuclear associated industries, one was from the State of Illinois Department of Nuclear Safety, and 11 were from utilities. The letters opposing the petition stated that the additional emergency planning exercise suggested by the petition is not needed to ensure public health and safety. These letters indicated that NRC analysis and industry testing have confirmed that safety systems will function to shut down a reactor if required, that licensees and NRC are developing contingency plans for key Y2K rollover dates, and that these contingency plans will evaluate specific risk factors and, where appropriate, provide mitigation strategies to allow continued safe operation. These letters stated that this effort provides a rational review and systematic approach to issues that could affect the continued safe operation of a plant within the conditions of its license, which the commenters believe is a more effective approach for ensuring that plants continue to operate and meet commitments.

Reasons for Denial

Pursuant to 10 CFR 50.47, "Emergency Plans"; 10 CFR 50.54, "Conditions of Licenses," paragraphs (q), (s), and (t); and Appendix E to 10 CFR Part 50, nuclear facilities are required to provide emergency response capabilities that take into account a variety of circumstances and challenges, to exercise their plans periodically to develop and maintain key skills of involved personal, and to identify deficiencies in the emergency plan and personnel and take appropriate actions to correct identified deficiencies. In accordance with 10 CFR 50.54(q), nuclear power reactor licensees are required to follow and maintain in effect emergency plans that meet the planning standards in 10 CFR 50.47(b) and the requirements of Appendix E to Part 50. In part, licensees are required to train

and test their organization and associated equipment to ensure that under all conditions and contingencies, such as power outages and computer and communication failures, appropriate emergency response is available and effective in an emergency.

To accomplish these requirements, licensees conduct numerous exercises and drills throughout the year. Inherent in the nature of emergency response is the realization that in an emergency, equipment may fail, loss of power may occur, personnel may not be available, and weather conditions may cause the emergency or escalate it. It is typical that, in the development of scenarios for exercises and drills, as well as in employee training programs, communication links, plant computers, and display and monitoring equipment are "out of service" or "fail" at inappropriate times. The NRC staff commonly oversees exercises that include these types of problems and the licensee's staff benefits from having to work around this training obstacle when a particular approach has been blocked. The NRC staff has observed licensees resorting to manual and backup systems to respond effectively and overcome these obstacles.

In terms of the effects of the Y2K problem, the NRC staff believes that the Y2K problem is not unique—it is a software error. Although the cause of computer and equipment failure may be different under Y2K, the result and the expected response are the same as situations encountered during many previous emergency exercises and drills. Therefore, there is no need to require licensees to conduct additional exercises to test specifically for potential Y2K failures.

In addition to existing emergency response plans, licensees of operating nuclear power plants and decommissioning power plants where spent fuel is stored at the plant site are preparing and implementing Y2K contingency plans as part of the plant-specific Y2K program. Operating nuclear power plant-specific Y2K contingency plans are based on the guidance in Nuclear Energy Institute/Nuclear Utilities Software Management Group NEI/NUSMG 98-07,² "Nuclear Utility Year 2000 Readiness Contingency Planning," dated August 1998, which provides a process and a method for preparing and implementing a facility-specific integrated contingency plan that considers specific risks from

internal and external sources. The Y2K contingency plans are generally built upon existing contingency activities (such as emergency preparedness, disaster recovery, storm damage restoration, grid restoration, and station blackout) and plant emergency procedures, coupled with the consideration that potential Y2K-related failures could affect many systems and components. Among the external events that are considered for contingency planning are—

- the loss of emergency plan equipment and services: pagers, radios, sirens and meteorology information, and
- the loss of essential services: telephone, microwave, water, satellites, networks, security, police, and fire-fighting capability.

The need for simulated exercises, development of special procedures, and Y2K contingency plan specific training is considered in the Y2K contingency planning process. Contingency plan verification is included in NEI/NUSMG 98-07 guidelines to provide confidence that the plans can be executed as intended. The contingency planning efforts, as outlined in NEI/NUSMG 98-07, provide additional training, staffing, and material procurement for occurrences that could happen at any time but that have a higher probability of occurring during the critical Y2K-related dates. Licensees and NRC are currently developing contingency plans for critical Y2K rollover dates. These contingency plans evaluate specific risk factors and, where appropriate, provide mitigation strategies to cope with plant-specific effects of the most probable and serious failures that might be initiated or exacerbated by the Y2K problem.

On May 11, 1998, NRC issued Generic Letter (GL) 98-01, "Year 2000 Readiness of Computer Systems at Nuclear Power Plants." In GL 98-01, NRC requested that all operating nuclear power plant licensees submit written responses regarding their facility-specific Y2K readiness programs in order to obtain confirmation that licensees are addressing the Y2K problem effectively. All licensees have responded to GL 98-01, stating that they have adopted plant-specific programs that are intended to make the plants Y2K ready by July 1, 1999. These programs are patterned on industry guidelines (NEI/NUSMG 97-07, "Nuclear Utilities Year 2000 Readiness") that have been found acceptable by NRC. GL 98-01 also requests a written response, no later than July 1, 1999, confirming that these facilities are Y2K ready, including contingency planning. Licensees who are not Y2K ready by July 1, 1999, must provide a status report and schedule for

the remaining work to ensure timely Y2K readiness.

NRC considers the guidance in NEI/NUSMG 98-07, when properly implemented, as an acceptable approach for licensees to mitigate and manage Y2K-induced events that could occur on Y2K-critical dates.

As part of its oversight of licensee Y2K program activities, NRC staff audited the contingency planning effort of six licensee facilities. These audits were completed during June 1999. These audits focused on the licensee's approach to addressing both internal and external Y2K risks to safe plant operation, based on the guidance in NEI/NUSMG 98-07. The audits at these facilities examined in detail back-up measures the utilities have in place to deal with possible Y2K problems, either on site or off site, including problems with the loss of emergency plan equipment and services (pagers, radios, sirens, and meteorology), the loss of essential services (telephone, microwave, water, satellites, networks, security, police), and the failure of the offsite emergency responders to perform their task effectively.

Additionally, NRC regional staff reviewed Y2K activities at all operating nuclear power plants to verify the status of licensee efforts to ensure that all plants will be able to function safely on January 1, 2000, and beyond. The reviews: (1) verify that all NRC licensees have implemented Y2K program activities; (2) evaluate the progress they have made to ensure that they are on schedule to achieve Y2K readiness; and (3) assess their contingency plans for addressing Y2K-related issues. The regional staff is using guidance prepared by the NRC Headquarters staff that is based on NRC GL 98-01, NEI/NUSMG 97-07, and NEI/NUSMG 98-07. These reviews were completed by July 1999.

The offsite components of emergency preparedness and response, which are the responsibility of States, counties, and municipalities, are already utilized by those governmental entities to address a wide range of events (e.g., grid failures, tornadoes, floods, hurricanes, snowstorms, industrial accidents). These events often involve widespread loss of normal capabilities and services (e.g., loss of electricity and telephone service, blocking of roads) coupled with the need for a multi-capability response. NRC is also working closely with the Federal Emergency Management Agency (FEMA) on its plans to conduct Y2K workshops for the State and local radiological emergency preparedness community. NRC and nuclear facilities licensees will participate in these workshops. NRC is an active member of

²NEI/NUSMG 98-07 was preceded by NEI/NUSMG 97-07, "Nuclear Utility Year 2000 Readiness," dated October 1997, which presented a strategy for developing and implementing a nuclear utility Y2K program.

the Emergency Services Sector Working Group for Y2K, which is headed by FEMA. In addition, to facilitate Agreement State efforts to address the Y2K issue, a link to State Government Year 2000 Web sites has been provided by the NRC. NRC will make every effort to share with the States any Y2K issue that may also affect Agreement States or Agreement State licensees.

NIRS has not explained why the approach currently being pursued by the licensees, the nuclear industry, and NRC does not provide reasonable assurance of adequate emergency response capabilities during the transition from 1999 to 2000.

In the case of research and training/test reactors, licensees of these facilities also have established programs to evaluate and correct Y2K deficiencies. Many research reactors will be shut down on January 1, 2000, as the institutions operating them (e.g., universities and laboratories) will be closed for the holiday. Further, these reactors often have passive safety features and low power levels, which ensure minimal potential offsite consequences. In addition, NRC staff concluded that any research reactor in operation on January 1, 2000, could be readily shut down manually using emergency procedures and existing shutdown systems, even if their operational systems should experience a Y2K problem.

Conclusion

Plant-specific industry planning for Y2K contingencies, which is built upon existing emergency response plans and procedures required by the current emergency preparedness regulations, provides a reasonable assurance that adequate protection measures will be taken in the event of radiological emergency during Y2K critical dates. Imposing a new prescriptive rule as proposed in the petition in an area in which the industry action is already exceeding the actions that address the petitioner's general issues would be counterproductive to the ongoing Y2K readiness efforts of the licensees. Therefore, the additional full-scale emergency planning exercise requested by the NIRS is not necessary to ensure emergency response capabilities to provide reasonable assurance of adequate protection to public health and safety despite the occurrence of Y2K problems.

For these reasons, the Commission denies the petition.

Dated at Rockville, Maryland, this 17th day of August, 1999.

For the Nuclear Regulatory Commission.
Andrew L. Bates,
Acting Secretary of the Commission.
[FR Doc. 99-21751 Filed 8-20-99; 8:45 am]
BILLING CODE 7590-01-P

NUCLEAR REGULATORY COMMISSION

10 CFR Parts 50 and 70

[Docket No. PRM-50-67]

Nuclear Information and Resource Service; Petition for Rulemaking Denial

AGENCY: Nuclear Regulatory Commission.

ACTION: Petition for rulemaking; denial.

SUMMARY: The Nuclear Regulatory Commission (NRC) is denying a petition for rulemaking (PRM-50-67) from the Nuclear Information and Resource Service (NIRS). The petitioner requested that the NRC amend its regulations to require that nuclear facilities ensure the availability of backup power sources to power safety systems of reactors and other nuclear facilities in the event of a date-sensitive, computer-related incident resulting from a Year 2000 (Y2K) issue. The petitioner requested that NRC take this action to ensure that reliable backup sources of power are available in the event of a Y2K incident. The Commission agrees that maintaining reliable emergency power is important and has considered the petitioners request as part of its review of existing regulatory requirements and licensee actions to assure reliable emergency power during the Y2K transition. Based on this review, the Commission has determined that existing regulatory requirements, actions taken by the licensees to implement a systematic and structured Y2K readiness program adequately address Y2K issues, and NRC's oversight of the licensees' implementation of these programs provide reasonable assurance of adequate protection to public health and safety. Because the Commission has concluded that existing programs already address the petitioner's concern regarding availability of emergency power, the petition is denied.

ADDRESSES: Copies of the petition for rulemaking, the public comments received, and NRC's letters to the petitioners are available for public inspection or copying in NRC Public Document Room, 2120 L Street, NW (Lower Level), Washington, DC, as well as on NRC's rulemaking web site at <http://ruleforum.llnl.gov>.

FOR FURTHER INFORMATION CONTACT: Matthew Chiramal, Office of Nuclear Reactor Regulation, US Nuclear Regulatory Commission, Washington, DC 20555-0001, telephone 301-415-2845, E-mail address mxc@nrc.gov, or Gary W. Purdy, Office of Nuclear Material Safety and Safeguards, US Nuclear Regulatory Commission, Washington, DC 20555-0001, telephone 301-415-7897, E-mail address gwp1@nrc.gov.

SUPPLEMENTARY INFORMATION:

Background

NRC received three related petitions for rulemaking (PRM-50-65, PRM-50-66, PRM-50-67), each dated December 10, 1998, submitted by the NIRS concerning various aspects of Y2K issues and nuclear safety. This petition (PRM-50-67) requested that NRC adopt regulations that would require facilities licensed by NRC under 10 CFR parts 50 and 70 to provide reliable sources of backup power. The first petition (PRM-50-65) requested that NRC adopt regulations that would require facilities licensed by NRC under 10 CFR parts 30, 40, 50, and 70 to be Y2K compliant. The second petition (PRM-50-66) requested that NRC adopt regulations that would require facilities licensed by NRC under 10 CFR part 50 to develop and implement adequate contingency and emergency plans to address potential system failures. Because of the nature of these petitions and the date-specific issues they address, the petitioner requested that the petitions be addressed on an expedited schedule.

On January 25, 1999, NRC published a notice of receipt of a petition for rulemaking in the **Federal Register** (64 FR 3789). It was available on NRC's rulemaking website and in the NRC Public Document Room. The notice of receipt of a petition for rulemaking invited interested persons to submit comments by February 24, 1999.

The Petition

The petitioner requested that NRC adopt the following text as a rule:

The Nuclear Regulatory Commission recognizes that date-sensitive computer programs, embedded chips, and other electronic systems that perform a major role in distributing, allocating, and ensuring electric power throughout the United States may be prone to failure beginning on January 1, 2000. Loss of all alternating current electricity from both the offsite power grid and onsite emergency generators (commonly known as "station blackout") long has been identified by NRC as among the most prominent contributors to risk for atomic reactors.

(1) For these reasons, NRC requires of part 50 and 70 licensees as of December 1, 1999:

[Federal Register: August 23, 1999 (Volume 64, Number 162)]

[Proposed Rules]

[Page 45911-45918]

From the Federal Register Online via GPO Access [wais.access.gpo.gov]

[DOCID:fr23au99-23]

NUCLEAR REGULATORY COMMISSION

10 CFR Parts 50 and 70

[Docket No. PRM-50-67]

Nuclear Information and Resource Service; Petition for Rulemaking Denial

AGENCY: Nuclear Regulatory Commission.

ACTION: Petition for rulemaking; denial.

SUMMARY: The Nuclear Regulatory Commission (NRC) is denying a petition for rulemaking (PRM-50-67) from the Nuclear Information and Resource Service (NIRS). The petitioner requested that the NRC amend its regulations to require that nuclear facilities ensure the availability of backup power sources to power safety systems of reactors and other nuclear facilities in the event of a date-sensitive, computer-related incident resulting from a Year 2000 (Y2K) issue. The petitioner requested that NRC take this action to ensure that reliable backup sources of power are available in the event of a Y2K incident. The Commission agrees that maintaining reliable emergency power is important and has considered the petitioners request as part of its review of existing regulatory requirements and licensee actions to assure reliable emergency power during the Y2K transition. Based on this review, the Commission has determined that existing regulatory requirements, actions taken by the licensees to implement a systematic and structured Y2K readiness program adequately address Y2K issues, and NRC's oversight of the licensees' implementation of these programs provide reasonable assurance of adequate protection to public health and safety. Because the Commission has concluded that existing programs already address the petitioner's concern regarding availability of emergency power, the petition is denied.

ADDRESSES: Copies of the petition for rulemaking, the public comments

received, and NRC's letters to the petitioners are available for public inspection or copying in NRC Public Document Room, 2120 L Street, NW (Lower Level), Washington, DC, as well as on NRC's rulemaking web site at <http://ruleforum.llnl.gov>.

FOR FURTHER INFORMATION CONTACT: Matthew Chiramal, Office of Nuclear Reactor Regulation, US Nuclear Regulatory Commission, Washington, DC 20555-0001, telephone 301-415-2845, E-mail address mxn@nrc.gov, or Gary W. Purdy, Office of Nuclear Material Safety and Safeguards, US Nuclear Regulatory Commission, Washington, DC 20555-0001, telephone 301-415-7897, E-mail address gwpl@nrc.gov.

SUPPLEMENTARY INFORMATION:

Background

NRC received three related petitions for rulemaking (PRM-50-65, PRM-50-66, PRM-50-67), each dated December 10, 1998, submitted by the NIRS concerning various aspects of Y2K issues and nuclear safety. This petition (PRM-50-67) requested that NRC adopt regulations that would require facilities licensed by NRC under 10 CFR parts 50 and 70 to provide reliable sources of backup power. The first petition (PRM-50-65) requested that NRC adopt regulations that would require facilities licensed by NRC under 10 CFR parts 30, 40, 50, and 70 to be Y2K compliant. The second petition (PRM-50-66) requested that NRC adopt regulations that would require facilities licensed by NRC under 10 CFR part 50 to develop and implement adequate contingency and emergency plans to address potential system failures. Because of the nature of these petitions and the date-specific issues they address, the petitioner requested that the petitions be addressed on an expedited schedule.

On January 25, 1999, NRC published a notice of receipt of a petition for rulemaking in the Federal Register (64 FR 3789). It was available on NRC's rulemaking website and in the NRC Public Document Room. The notice of receipt of a petition for rulemaking invited interested persons to submit comments by February 24, 1999.

The Petition

The petitioner requested that NRC adopt the following text as a rule:

The Nuclear Regulatory Commission recognizes that date-sensitive computer programs, embedded chips, and other electronic systems that perform a major role in distributing, allocating, and ensuring electric power throughout the United States may be prone to failure beginning on January 1, 2000. Loss of all alternating current electricity from both the offsite power grid and onsite emergency

generators (commonly known as ``station blackout'') long has been identified by NRC as among the most prominent contributors to risk for atomic reactors.

(1) For these reasons, NRC requires of part 50 and 70 licensees as of December 1, 1999:

[[Page 45912]]

(a) that all emergency diesel generators that provide backup power to nuclear licensees must be operational and remain operational; (b) that licensees that cannot demonstrate full operational capabilities of all emergency diesel generators must close until such time that full operational capabilities of emergency diesel generators are attained; (c) that all licensees must have a 60-day supply of fuel for emergency diesel generators.

(2) Further, to ensure adequate protection of public health and safety, NRC requires that all licensees under these sections must provide alternate means of backup power sufficient to assure safety. These may include, but are not limited to: solar power panels, wind turbines, hydroelectric power, biomass power, and other means of generating electricity. These additional backup systems must provide electricity directly to the licensee rather than to the broader electrical grid.

(3) Irradiated fuel pools are to be immediately classified as Class 1-E; backup power systems must be sufficient to provide cooling for such pools. Licensees which cannot demonstrate compliance with sections (1) and (2) must cease operations as of December 1, 1999, until compliance with these sections is attained.

The petitioner acknowledged that NRC has recognized the potential safety and environmental problems that could result if date-sensitive electronic systems fail to operate or provide false information. The petitioner asserted that NRC has required its licensees of reactor and major fuel cycle facilities to report by July 1, 1999, on their programs to ensure compliance with Y2K issues.

The petitioner discussed the ``availability of electricity to power atomic reactor and other nuclear facility safety systems.'' The petitioner explained that electricity is required to operate atomic reactor safety and cooling systems and that this electricity is provided by offsite sources (overall an electrical grid). The petitioner commented that NRC has long recognized that the loss of all alternating current from both onsite and offsite systems, known generally as ``station blackout,'' is the most important contributor to risk at most atomic reactors. The petitioner correctly noted that NRC has required licensees to have backup sources of onsite emergency power, normally multiple emergency diesel generators, capable of supplying the electricity necessary to operate essential safety systems.

The petitioner asserted that the emergency diesel generators (EDGs) used at atomic reactors have proven unreliable and are often out of service. The petitioner claimed that the unprecedented condition posed by the Y2K problem, coupled with the demonstrated and ongoing failures of EDGs, constitutes reasonable doubt that EDGs can be relied on. Therefore, the petitioner believes that NRC should adopt regulations that require that licensees have all EDGs operational during the Y2K transition, that they have a 60-day supply of fuel as of December 1, 1999, and that licensed facilities that cannot meet these requirements be closed.

The petitioner discussed the likelihood and the potential consequences of a failure of all or a portion of the electric power grid in the United States. The petitioner recognized that the failure of all or a portion of the electrical grid as a result of Y2K issues is well beyond the scope of NRC's authority. However, the petitioner stated that the extended failure of all or a portion of the electrical grid would place severe stress on the current EDG system of backup power supply and that the failure of EDGs at one or more reactor sites could result in extended station blackouts and nuclear catastrophes. The petitioner asserted that this possibility is well within the range of probabilities for which NRC routinely requires action by its licensees. The petitioner further asserted that reliance on unreliable EDGs is insufficient under these conditions. Therefore, the petitioner believes that it is essential that NRC take the regulatory action suggested in this petition on an expedited basis.

Public Comments on the Petition

In response to the petition, NRC received 73 comment letters, which included 1 letter signed by 25 citizens of the State of Michigan, 3 letters from nuclear associated industries, 10 letters from utilities, 14 letters from private organizations, and 45 letters from private citizens.

Fifty-six letters supported the petition, of which 41 were from private citizens, 14 were from private organizations, including 1 from the NIRS and 1 signed by 25 individuals. The comments supporting the petition addressed the concern that diesel generators are unreliable and that a reliable electric power grid is needed.

In some of the letters supporting the petition, the authors included the following additional comments that provide information or requested action that was not contained in the petition. These comments noted that--

1. Y2K may increase the possibility of local, regional or widespread blackouts. Losing all electric power to the station is called station blackout. EDGs, each capable of powering the entire plant, compensate for the loss of off-site electric power. Reliability of diesel generators is considerably lower than required and, moreover, one of two diesel generators is often out of service. Therefore, for

Y2K, an additional source of backup power needs to be provided, and both EDGs should be operable with sufficient fuel on site to compensate for fuel delivery problems.

2. In order to ensure that sufficient electric power is available during an extended loss of offsite power to safely shut down a nuclear plant and cool the spent fuel pool, enough diesel fuel should be available at the site for periods extending from 60 days to 160 days to whatever the time period that offsite power is not available.

3. An additional power source or method should be available during power failure to provide makeup water to the spent fuel pool.

4. On at least one occasion, a nuclear power plant licensee falsified data relative to the reliability of EDGs. The concern is that other nuclear utilities may not provide reliable data for their EDGs to NRC. These comments are addressed specifically in the discussion of ``Reasons for Denial.''

Seventeen letters opposed the petition, including 4 from private citizens, 3 from nuclear associated industries, and 10 from utilities. Comments opposing the petition stated that onsite emergency electric power generators are already required to be maintained in a state of readiness and validated by periodic testing, fuel supplies are maintained at a level adequate to facilitate appropriate response/recovery actions, and the current regulations and license conditions are adequate to address the issue. One commenter used a specific facility as an example to demonstrate that in the highly unlikely event of a total loss of electrical power (meaning the loss of the electric grid and backup power) the conditions at that facility would not threaten public health and safety. Any potential adverse impacts would be limited to work areas and equipment within the facility, and there would be no catastrophic or significant loss of control or containment of nuclear material. That commenter indicated that the provision of a tertiary (meaning a secondary backup) source of electric power to its fuel facility, which would be independent of the broader electric grid, as would be required under PRM-50-67, is an unreasonable requirement that would force shutdown of the facility on December 1, 1999, in the absence of any significant credible safety risk.

Reasons for Denial

NRC is denying the petition because the Commission has determined that

[[Page 45913]]

current NRC regulations and license conditions governing power systems at part 50 and 70 facilities provide reasonable assurance of adequate protection to public health and safety, and licensees are taking appropriate actions to provide reasonable assurance that Y2K problems will not adversely affect the functioning of these power systems. The

NRC is reviewing the licensees' implementation of these Y2K activities and will have sufficient time to take appropriate regulatory action if licensees' Y2K activities and programs are not properly implemented in a timely fashion. NIRS does not explain why the licensees' Y2K activities and programs, and NRC's oversight of the licensees' implementation of these activities and programs, are inadequate such that the rule proposed by NIRS is necessary to provide reasonable assurance of adequate protection from Y2K-induced unavailability of onsite power systems.

NIRS' proposed rule contained three separate requirements for Part 50 and Part 70 licensees: (1) Operational demonstration of EDGs and provision of a 60-day diesel fuel supply; (2) alternate means of backup power; and (3) classification of fuel pools as Class 1-E. Facilities that cannot demonstrate compliance with these requirements by December 1, 1999, would be required to shut down until they could demonstrate compliance. The proposed requirements are addressed below for part 50 power reactors, part 50 decommissioning reactors, part 50 non-power reactors, and part 70 licensees in Sections I, II, III, and IV, respectively.

I. Part 50 Nuclear Power Plants

A. Diesel Generator Operational Capability and Sixty-Day Fuel Supply

Nuclear power plants must be protected against loss of offsite power (LOOP) by providing an onsite backup power system by either 10 CFR part 50, Appendix A, General Design Criteria (GDCs) 17 and 18, or equivalent requirements in the plant's licensing basis. Most licensees rely upon diesel generators to provide onsite backup power, although there is at least one licensee that relies upon hydroelectric power. All licensees have committed to provide an onsite supply of fuel to operate diesel generators; most commitments are for a 7-day supply. In addition, nuclear power plants are required by 10 CFR 50.63 to have the capability to withstand loss of all ac power (generally referred to as ``station blackout'' [SBO]) for an established period of time. As indicated in Section I.A.2 there is no reason to believe that Y2K would significantly affect the probability or duration of a LOOP and/or a SBO from that otherwise assessed in a licensee's coping analysis required by 10 CFR 50.63. To demonstrate that their plants can cope with SBO, some licensees rely upon an alternate ac power source(s) (separate from the backup power system) that utilizes diesel generators or gas turbine generators.

1. EDG Reliability

NIRS claims that EDGs have proven to be unreliable, such that licensees should be required to demonstrate ``full operational capability'' ¹ of EDGs that provide backup power. As previously noted, backup onsite power is usually provided by diesel generators, which supply electric power to the plant safety systems

upon a LOOP. NRC regulations require that onsite electric power supplies and the onsite electric distribution system have sufficient independence, redundancy, and testability to perform their safety functions assuming a single failure. Furthermore, in accordance with their license conditions, all licensees are required to have backup electricity sources operational to supply safety-related equipment at all times independent of circumstances such as Y2K-induced LOOP. The operation and maintenance of diesel generators and other safety-related equipment necessary for the safe shutdown of the reactor are controlled by the plant technical specifications (TSs). The TSs are intended to ensure that sufficient power will be available to supply safety-related equipment at all times regardless of key Y2K dates. Moreover, the plant TSs require that immediate action be taken to restore inoperable diesel generators to operable status. The plant TSs require the diesel generators to be tested routinely in order to demonstrate their operability and their ability to supply power as needed.

\1\ The NRC assumes that by ``capability,'' NIRS actually means ``reliability'' because ``capability'' normally refers to the ability of the emergency power system to power safety related electrical loads at the plant; whereas reliability normally refers to the actual performance of the system in terms of availability, which is what NIRS addresses in its petition.

NIRS did not present any information demonstrating that diesel generators are unreliable such that they should not be relied upon to provide backup power upon a LOOP. For each nuclear power plant, selected target diesel generator reliability values were established for plant-specific coping analysis in accordance with the requirements of 10 CFR 50.63, the SBO rule. Availability and reliability values are tracked by each licensee in accordance with the requirements of 10 CFR 50.65, the maintenance rule, and associated industry guidance.

In the resolution of Generic Safety Issue B-56, ``Diesel Generator Reliability,'' one of the options recommended by NRC staff was to revise the SBO rule to include specific requirements for demonstrating diesel generator reliability. However, in SECY-93-044, ``Resolution of Generic Safety Issue B-56, Diesel Generator Reliability,'' dated March 25, 1993, the Commission disapproved the revision to the SBO rule on the basis of the real progress made by the nuclear industry in improving the reliability of the diesel generators. NRC requirements and industry activities have resulted in a very high diesel generator reliability. In 1993, the industry-wide average reliability of diesel generators was in excess of 98 percent. An Idaho National Engineering Laboratory study (INEL-95-0035, ``Emergency Diesel Generator Power System Reliability: 1987-1993'') of a number of nuclear power EDG reliability concluded that those plants with a 0.950 reliability target

goal were actually demonstrating 0.987, and the plants with a 0.975 reliability target goal were actually demonstrating 0.985. The Commission stated that the industry should continue an aggressive program of maintenance as well as root cause analysis that will continue to offer assurance that diesel generator reliability will be maintained at a satisfactory level in the future.

All licensees have implemented a maintenance monitoring program consistent with the maintenance rule, which became effective on July 10, 1996. Licensees are required to monitor the performance of diesel generators against the established goals and to take appropriate corrective actions if the goals are not met. The maintenance rule requires that these goals be evaluated by the licensees at least every refueling cycle, not to exceed 2 years. To evaluate the process established by licensees to set goals and monitor them, and to verify that preventive maintenance has been effective for systems and components under the maintenance rule, NRC staff conducted baseline inspections of all nuclear plants during 1996-1998. At several plants, diesel generators were among the systems and components reviewed to verify that goals were established and monitoring and trending were being performed. For pilot plants, diesel generators continue to be inspected and evaluated using the risk-informed, performance-based inspection process, which is part of the

[[Page 45914]]

NRC Oversight Baseline Inspection Program. NRC staff will continue to assess the reliability of diesel generators at nuclear power plants to ensure that the reliability of diesel generators is maintained at levels specified by each licensee when it performed its plant-specific coping analyses for SBO.

Additionally, the scope of licensees' Y2K programs, including contingency planning, covers the onsite power and other emergency power systems at the plant. NRC audits and reviews of licensee Y2K program activities to date have verified licensee consideration of these systems, and no associated Y2K issue relating to onsite power systems have been identified.

The NRC does not believe, on the basis of current information from the North American Electric Reliability Council (NERC),² that availability of offsite power from the electrical grid is likely to be significantly affected by Y2K-induced problems. In its most recent reports issued on January 11 and April 30, 1999, NERC states, ``Transmission outages are expected to be minimal and outages that may occur are anticipated to be mitigated by reduced energy transfers established as part of the contingency planning process.'' Both reports indicate that the transition through critical Y2K rollover dates should have a minimal impact on electric systems operations in North America and that widespread, long-term loss of the grid as a result of Y2K-induced events is not a credible scenario. Therefore, there is no

reason to believe that Y2K would significantly affect the probability or duration of a LOOP and/or a SBO from that otherwise assessed in the licensee's coping analysis required by 10 CFR 50.63.

\2\ NERC is an electric industry organization made up of 10 Regional Reliability Councils that account for nearly every bulk electric supply and delivery organization in the interconnections of North America. NERC and its Regional Reliability Councils set operating and engineering standards for the reliability of electric systems in North America. In May 1998, U.S. Department of Energy requested NERC to facilitate the electric industry's Y2K effort.

As discussed above, the diesel generators and associated onsite power supply systems, being within the scope of licensees' Y2K readiness programs, will be Y2K ready prior to the Y2K transition, and no decrease in reliability of the diesel generators is expected. The information provided by NERC indicates that the likelihood of a LOOP is not expected to increase significantly during Y2K transition. Based on these considerations, plus the ability of the plants to cope with a station blackout, the likelihood of an event that will jeopardize public health and safety is acceptably low.

One of the public comments received by NRC in response to the petition indicated a concern regarding falsification of EDG reliability data by licensees. This particular concern has been investigated and resolved as documented in an NRC memorandum dated December 20, 1993, from the Office of Investigations to the Region II Regional Administrator, ``Vogtle Electric Generating Plant: Alleged False Statements Regarding Test Results on Emergency Diesel Generators (Case No. 2-90-020R).'' Falsification of EDG failure data by licensees is not considered by NRC as an industry-wide, generic occurrence. Such incidents, when identified, will continue to be treated by NRC on a case-by-case basis and appropriate actions will be taken in response.

2. Sixty-day fuel supply

NIRS' proposed rule would require each nuclear power plant licensee to have a 60-day onsite supply of fuel for diesel generators, as opposed to a 7-day fuel supply to which most licensees have committed. However, NIRS provided no technical basis why offsite power from the grid would not be reestablished within the 7-day period accommodated by existing onsite fuel supplies. Nor did NIRS explain why, should a LOOP continue for longer than 7 days, a licensee would be unable to resupply diesel fuel for a period of 60 days so that a 60-day fuel supply must be maintained onsite. Commenters on the NIRS petition who suggested a requirement for a larger fuel supply (able to accommodate 160 days of operation without resupply) also did not provide any technical bases for their recommendations. As stated previously, the likelihood or duration of a LOOP is not expected to be significantly affected by the

Y2K issue.

Furthermore, the NRC licensees are taking appropriate actions to ensure that their plants will be able to cope with Y2K-induced LOOP durations longer than 7 days. As part of each plant's Y2K activities, each licensee is preparing a contingency plan, which includes obtaining diesel fuel and other necessary supplies to cope with Y2K-induced long-term LOOP events. As part of NRC's review of licensees' implementation of their Y2K programs, NRC will confirm that licensee Y2K programs address emergency power sources, arrangements for obtaining critical commodities (e.g., EDG fuel oil) and other considerations for contingency planning identified in Nuclear Energy Institute/Nuclear Utilities Software Management Group (NEI/NUSMG) 98-07, ``Nuclear Utility Year 2000 Readiness Contingency Planning,' dated August 1998.

The capability of diesel generators and the adequacy of existing fuel supplies have been demonstrated at numerous plants during weather-induced interruptions of the power grid and other cases of LOOP from the grid. An example is the Turkey Point nuclear plant LOOP event during the August 1992 Hurricane Andrew when the diesel generators automatically picked up safety-related loads and maintained the plant for an extended period (over 6 days) during the recovery until site power was restored. NRC considers the current 7-day fuel capacity to be sufficient to operate diesel generators for longer than the time that it takes to replenish the onsite supply from outside sources. Accordingly, a rule requiring licensees to maintain sufficient fuel to operate their diesel generators for a 60-day period or longer is not necessary to provide reasonable assurance of adequate protection against Y2K-induced LOOP events. The regulation requires nuclear power plants to withstand LOOP events regardless of whether the LOOP is due to Y2K or other causes. The petitioner has not demonstrated that Y2K would significantly affect the probability or duration of loss of all alternating current power from that otherwise assumed in the licensee's coping analysis required by 10 CFR 50.63, and the licensees' coping analyses continue to be applicable during the period that NIRS claims would present an increased susceptibility to a LOOP.

B. Additional Alternate Means of Backup Power

NIRS' petition requests NRC to require all licensees to provide an alternate (second) means of backup power, such as solar power panels, wind turbines, hydroelectric power, and biomass power. The petition also requests NRC to require that the alternate backup power system provide electricity directly to the licensee rather than to the broader electrical grid.

1. Need for Additional Backup Power Source

As discussed in Section I.A.1 above, not only must licensees provide a source of backup power upon a LOOP, some licensees have provided an alternate ac power source in order to demonstrate that they are able to cope with a LOOP concurrent with a loss of onsite backup

power (an SBO) for a specified duration. Thus, these licensees have three sources of power: (1) Offsite

[[Page 45915]]

power from two independent circuits; (2) onsite backup power from independent, redundant power supplies; and (3) alternate ac power. The NRC does not believe that the NIRS' proposal for a fourth source of power ('`alternative backup power,' in the words of NIRS) is necessary to provide reasonable assurance of adequate protection against Y2K-induced problems.

The petitioner does not explain why Y2K would affect diesel generators as a source of backup and/or alternate ac power, such that a source of power in addition to diesel generators is necessary to address SBO. The scope of the licensees' Y2K program covers both the onsite backup and the alternate ac power systems at nuclear power plants. Since 1996, NRC has been working with the nuclear industry and licensees of operating nuclear power plants in order to achieve Y2K readiness at all nuclear power plants. NRC has issued Information Notice (IN) 96-70, '`Year 2000 Effect on Computer System Software,' on December 24, 1996; Generic Letter (GL) 98-01, '`Year 2000 Readiness of Computer Systems at Nuclear Power Plants,' on May 11, 1998; and GL 98-01, Supplement 1, '`Year 2000 Readiness of Computer Systems at Nuclear Power Plants,' on January 14, 1999.

NRC issued IN 96-70 to alert nuclear power plant licensees of the Y2K problem. The information notice described the potential problems that nuclear power plant computer systems and software may encounter during and following the transition into the year 2000 and how the Y2K issue may affect NRC licensees. IN 96-70 encouraged licensees to examine their uses of computer systems and software well before the year 2000 and suggested that licensees consider appropriate actions for examining and evaluating their computer systems for Y2K vulnerabilities.

In GL 98-01, NRC endorsed the guidance in the industry document issued by the NEI/NUSMG 97-07, '`Nuclear Utility Year 2000 Readiness,' when properly augmented in the area of risk management, contingency planning, and remediation of embedded systems, as one possible approach in implementing a plant-specific Y2K readiness program. In August 1998, NEI issued an industry document, NEI/NUSMG 98-07, which provided additional guidance in the area of internal and external risk management and contingency planning. External events that should be considered for facility-specific contingency planning include electric grid/transmission/ distribution system events (e.g., a LOOP, grid instability and voltage fluctuations, load fluctuations and loss of grid control systems), loss of emergency plan equipment and services, loss of essential services, and depletion of consumables. The NRC considers the guidance in NEI/NUSMG 98-07, when properly implemented, as an acceptable approach to mitigate and manage Y2K-induced events

that could occur on Y2K-critical dates.

In GL 98-01, NRC requested that all operating nuclear power plant licensees submit written responses regarding their facility-specific Y2K readiness programs in order to obtain confirmation that licensees are addressing the Y2K problem effectively. All licensees have responded to GL 98-01, stating that they have adopted plant-specific programs that are intended to make the plants Y2K ready by July 1, 1999. GL 98-01 also requests a written response, no later than July 1, 1999, confirming that these facilities are Y2K ready, including contingency planning. Licensees who are not Y2K ready by July 1, 1999, must provide a status report and schedule for the remaining work to ensure timely Y2K readiness.

As part of its oversight of licensee Y2K activities, the NRC staff conducted sample audits of 12 plant-specific Y2K readiness programs. The objectives of the audits were as follows:

1. To assess the effectiveness of licensee programs for achieving Y2K readiness and in addressing compliance with the terms and conditions of their license and NRC regulations and continued safe operation.
2. To evaluate program implementation activities to ensure that licensees are on schedule to achieve Y2K readiness in accordance with GL 98-01 guidelines.
3. To assess the licensee contingency planning for addressing risks associated with events resulting from Y2K problems.

NRC staff determined that this approach was an appropriate means of oversight of licensee Y2K readiness efforts because: (1) All licensees had committed to the nuclear power industry Y2K readiness guidance (NEI/NUSMG 97-07) in their first response to NRC GL 98-01; and (2) the audit would verify that licensees were effectively implementing the guidelines. The sample of 12 licensees included large utilities such as Commonwealth Edison and Tennessee Valley Authority, as well as small single-unit licensees such as North Atlantic Energy (Seabrook) and Wolf Creek Nuclear Operating Corporation. NRC staff selected a variety of types of plants of different ages and locations in this sample in order to obtain the necessary assurance that nuclear power industry Y2K readiness programs are being effectively implemented and that licensees are on schedule to meet the readiness target date of July 1, 1999, established in GL 98-01.

In late January 1999, NRC staff completed the 12 audits. On the basis of the audit observations, NRC staff has concluded that licensees are effectively addressing Y2K issues and are undertaking the actions necessary to achieve Y2K readiness in accordance with the GL 98-01 target date, although some plants will have some remediation, testing, and final certification scheduled for the fall 1999 outage. NRC staff did not identify any issues that would prevent these licensees from achieving readiness.

The NRC staff is not aware of any Y2K problems in nuclear power plant systems that directly affect actuation of safety functions,

including the emergency onsite power systems. Moreover, NRC audit results to date have not identified any associated residual Y2K problems with the emergency onsite power system and have confirmed the licensees' consideration of these systems. Also, the audits did not identify any Y2K problem in safety-related activation systems.

Additionally, the NRC's regional staff reviewed Y2K activities at all operating nuclear power plants to verify the status of licensee efforts to ensure that all plants will be able to function safely on January 1, 2000, and beyond. These reviews: (1) Verified that all NRC licensees have implemented Y2K program activities; (2) evaluated the progress made to ensure that the licensees are on schedule to achieve Y2K readiness; and (3) assessed licensees' contingency plans for addressing Y2K-related issues. The reviews were completed by July 1999.

The NRC staff audited the contingency planning efforts of six licensee facilities. The audits at these facilities examined in detail backup measures the utilities have in place to deal with possible Y2K problems, either on site or off site, that might affect plant operations. The audits were conducted in May and June 1999.

The reviews and audits will allow NRC staff to verify the progress of all licensees and determine whether any regulatory action is needed. Information from the reviews will be used in conjunction with the status reports that NRC has required its nuclear power plant licensees to provide by July 1, 1999. By July 1, 1999, all licensees responded to GL 98-01, Supplement 1.

[[Page 45916]]

The responses indicated that 68 plants are Y2K ready and 35 plants need to complete work on computer systems or devices after July 1, 1999.

NIRS presents no information or argument why these actions by the licensees, the nuclear industry, and NRC are not sufficient to ensure that onsite back up and alternate ac power systems will not be adversely affected by Y2K-induced problems.

2. Specific Backup Power Sources Proposed by NIRS

The petitioner's proposed alternative backup power sources, such as solar and wind, are not reliable backup power sources because of their undependability under unpredictable weather conditions or because they are limited by the amount of power they can generate. Additional comments received by the NRC in response to the petition also suggested the requirement for alternate power. The petitioner does not provide sufficient technical information to demonstrate that these additional alternative backup power sources would add more reliability than current backup power sources. Therefore, most of the sources of alternative backup power that are included in NIRS' proposed rule would not constitute an acceptable alternative source of backup power with the same level of availability and capability as diesel generators.

C. Spent Fuel Pool Class 1E Classification and Backup Power

The proposed rule would require all part 50 licensees to immediately classify irradiated (spent) fuel pools as Class 1-E and provide sufficient backup power to provide cooling to these pools. Because Class 1-E is an electric system classification, the NRC assumes that the petitioner intends the rule to require that the backup power supply for spent fuel pool cooling systems be classified as Class 1-E.

The petitioner does not explain why classification of the electric power system for spent fuel pool cooling systems as Class 1-E is necessary to protect spent fuel pools against a Y2K-induced LOOP. The Class 1-E classification addresses design and quality assurance (QA) requirements for manufacture and installation of electrical system components. Most of these systems are based upon analog controls and, therefore, are not subject to Y2K problems. Furthermore, simple reclassification of the electrical power system by itself would not appear to have any direct effect on minimizing Y2K-induced loss of power necessary for spent fuel cooling. Rather, an evaluation of the power system for Y2K susceptibility is necessary, which is what licensees have committed to implement. Thus, it is unclear how the requested requirements in the NIRS petition would provide assurance that Y2K problems will not prevent electrical power systems from performing their necessary safety functions. The NRC concludes that a rule change is not necessary since licensees are already directly addressing spent fuel pool cooling as part of their Y2K programs.

Furthermore, the NRC does not agree that a backup source of electrical power for spent fuel cooling is necessary at nuclear power plants in order to provide reasonable assurance of adequate protection. At most operating nuclear power plants, the emergency onsite power system can directly supply electric power to its spent fuel pool cooling systems. At those plants at which the spent fuel cooling system is not directly connected to the emergency onsite power system, the capability exists of connecting the cooling system to the emergency onsite power system. Requiring a backup (tertiary) source of electrical power is not justified in view of the length of time between loss of spent fuel cooling and the point at which there is a significant threat to integrity of the spent fuel rods. A licensee is required to keep the spent fuel pool filled to a level more than **23** feet above the top of the fuel rods and, generally, the water temperature in the pool is to be maintained below 140 deg.f. For a typical pool with a capacity of about 400,000 gallons and a worst case heat load causing 50 gpm of water loss as a result of evaporation, it would take about 3 days for the pool level to drop to the top of the fuel racks. This estimate does not include the heat-up time of 3 to 4 hours for the pool water to increase from 140 deg.f to 212 deg.f. This scenario assumes a total loss of all ac electric power and that no corrective actions are taken for 3 days in response to the decreasing water level in the spent fuel pool. For a typical heat load (non-refueling), the time to uncovering of the spent fuel pool would be around 2 weeks, again assuming that no

make-up water is added to the pool. Upon loss of water shielding, the radiation levels above the pool would increase. Assuming LOOP and failure of onsite emergency power sources, the only action necessary would be to provide make-up water to the spent fuel pool. The existing plant operating/emergency procedures provide for initiation of make-up water to the pool upon detection of low level. At many plants, the make-up water supply is provided by a plant safety system. Upon loss of all ac power, make-up water from any source, such as fire hoses supplied by diesel-driven fire pumps, can be used to maintain the required water level in the pool. In light of the substantial period of time available for a licensee to take mitigative actions upon loss of spent fuel pool electrical power, the NRC concludes that providing an additional backup source of power is not warranted at any operating nuclear power plant.

II. Part 50 Decommissioning Nuclear Power Plants

There are 21 permanently shutdown nuclear power plants which have been shut down for more than a year. Six of these facilities have removed all spent fuel from the site. Therefore, there are only 15 decommissioning power plants to which the proposed requirements in the petition would potentially apply.

Spent fuel pool cooling and support systems may be configured differently for decommissioning plants than for operating reactors due to the reduced need for decay heat removal at decommissioning plants. As decay heat loads drop, utilities are able under 10 CFR 50.59 to remove equipment from service once it no longer is needed to provide its safety function. At some plants there is no need for forced circulation to remove heat from the pool as adequate heat loss to ambient keeps the pool at an acceptable temperature. After a period of decay in the spent fuel pool, the heat load from spent fuel is significantly reduced as short-lived fission products decay. Consequently, the potential for boiling is reduced and the time available for the licensee to take mitigative action is greater. With the exception of Zion and Big Rock Point, more than three years has elapsed since any fuel was irradiated in the reactor at any of the nuclear power plants currently undergoing decommissioning.

The reasons discussed in Section I.C above regarding why electrical systems need not be classified Class 1-E for spent fuel pools at operating nuclear power plants also apply equally to decommissioning nuclear power plants. As previously noted, requiring a backup source of electrical power is not justified in view of the length of time between loss of spent fuel cooling and the point where there is a significant threat to integrity of the spent fuel rods. Upon loss of all ac power, make-up water from any source, such as fire hoses supplied by diesel-driven fire pumps, can be used to maintain the required water level in the pool.

In view of the long time period available for the licensee to respond to loss of power to the spent fuel pool cooling system and the relative simplicity of mitigative actions, the requirements proposed by NIRS with respect to spent fuel pool electrical system reclassification and the provision of alternative power are not justified.

III. Part 50 Non-Power Reactor Licensees

Non-power reactors operate at power levels ranging from 250 Kwt to 2 Mwt, and they operate at low temperatures. Any non-power reactor in operation on January 1, 2000, can be readily shut down manually using emergency procedures and existing shutdown systems. These reactors have passive safety features and generally do not require power to shut down and dissipate decay heat. Accordingly, NRC regulations do not currently require part 50 non-power reactors to provide a backup power source.

NIRS did not present any information or rationale why part 50 non-power reactors must provide an ``alternate'' source of backup power to address Y2K losses of power. In particular, NIRS did not address the fact that these facilities are not required to have a backup power source because power is not required to shut down and maintain these facilities in a safe-shutdown condition. In the absence of any rationale in support of the proposed requirement, the Commission concludes that there is no basis for adopting the proposed requirement for part 50 non-power reactor licensees.

IV. Part 70 Licensees

To alert major part 70 licensees of the Y2K problem, NRC issued Information Notice (IN) 96-70 in December 1996, and IN 98-30 in August 1998. In IN 96-70, NRC staff described the potential Y2K problems, encouraged licensees to examine their uses of computer systems and software well before the year 2000, and suggested that licensees consider appropriate actions to examine and evaluate their computer systems for Y2K vulnerabilities. In IN 98-30, NRC staff provided definitions of ``Y2K ready'' and ``Y2K compliant,'' encouraged licensees to contact vendors and test their systems for Y2K problems, and described elements of a Y2K readiness program.

In order to gather Y2K information regarding materials and major fuel cycle facilities, NRC formed a Y2K Team within the Office of Nuclear Material Safety and Safeguards (NMSS) in 1997. From September through December 1997, this NMSS Y2K Team visited a cross-section of materials licensees and fuel cycle facilities and conducted Y2K interviews. Each licensee or facility visited by the team indicated that it was aware of the Y2K issue and was in various stages of implementing its Y2K readiness program.

On June 22, 1998, the NRC staff issued Generic Letter (GL) 98-03,

``NMSS Licensees and Certificate Holders' Year 2000 Readiness Programs,' requested major part 70 licensees to inform NRC of the status of their Y2K readiness programs. In GL 98-03, the NRC staff requested all major part 70 licensees to submit by September 20, 1998, written responses regarding their facility-specific Y2K readiness program in order to confirm that they were addressing the Y2K problem effectively. All licensees responded to GL 98-03 by stating that they had adopted a facility-specific Y2K readiness program, and the scope of the program included identifying and, where appropriate, remediating embedded systems, and provided for risk management and the development of contingency plans. GL 98-03 also requested a written response, no later than December 31, 1998, which confirmed that these facilities were Y2K ready or provided a status report of work remaining to be done to become Y2K ready, including completion schedules. All licensees provided a second response to GL 98-03, which provided reports of work to be done, including completion schedules. Furthermore, following the second response, NRC requested a third written response, no later than July 1, 1999, which would confirm that these facilities were Y2K ready or would provide an updated status report.

Between September 1997 and October 1998, the major fuel cycle facilities were also asked Y2K questions during other inspections. On the basis of these Y2K inspections, the licensees were aware of the Y2K problem and were adequately addressing Y2K issues. There have been no identified risk-significant Y2K concerns for major part 70 licensees.

NIRS presents no information or argument why these above-mentioned actions by the licensees and NRC are not sufficient to address Y2K problems and provide reasonable assurance of adequate protection during the transition from 1999 to 2000.

EDG Reliability and Fuel Supply

The requirements proposed in the NIRS petition would require that: (1) All EDGs that provide backup power be operational and (2) licensees have a 60-day supply of fuel for EDGs or the facility would be shut down. The petitioner indicated these requirements are necessary to protect public health and safety. However, there are no part 70 licensees required to have EDGs in order to provide backup power to protect public health and safety. In the event of the loss of electric power in part 70 facilities, processing stops and there is no need for electric power to maintain a safe condition. There are some part 70 licensees who have independent power sources in order to meet physical protection (PP) requirements. These licensees are also required to have contingency plans for PP (e.g., augmented guard force) in the event of loss of independent power. Based on the above discussion, the 60-day fuel supply requirement is also not needed for part 70 licensees to provide reasonable assurance of adequate protection to public health and safety.

The petitioner does not provide sufficient technical information to

demonstrate that part 70 licensees must shut down if they do not have EDGs providing backup power or must have a 60-day fuel supply for EDGs.

Additional Alternate Means of Backup Power

NIRS asserted that NRC must require licensees to provide alternate means of backup power (e.g., solar power panels, wind turbines, hydroelectric power, biomass power). As stated above, it is not necessary for part 70 licensees to have backup power in order to shutdown to a safe condition. Also, part 70 licensees who are required to have independent power sources to meet PP requirements have contingency plans to meet the loss of the back-up power. Further, the petitioner does not provide sufficient technical information to demonstrate that these alternative back-up power sources are needed to provide reasonable assurance of adequate protection to public health and safety.

Back-up Power Supply for Spent Fuel Pool Cooling System

The proposed rule in the NIRS petition requests NRC to require that all licensees immediately classify irradiated fuel pools as Class 1-E, and provide sufficient back-up power to provide cooling to these pools. Because Class 1-E is an electric system classification, the NRC staff assumes that the petitioner intends the rule to apply to the back-up power supply for spent fuel pool cooling systems. Although some part 70 licensees have irradiated fuel at their facilities, these facilities do not store large quantities of irradiated fuel. The irradiated fuel is

[[Page 45918]]

used for research and development or educational purposes. If the irradiated fuel is stored in a pool, the heat generated from the fuel would be minimal and would not require a pool cooling system.

The petitioner provides no technical justification to support the proposal that spent fuel pools be immediately classified as Class 1-E. The regulatory action requested by NIRS is not required for part 70 licensees.

Conclusion

Existing NRC requirements, licensee commitments, and licensee activities and programs are sufficient to cope with losses of power, including those losses of offsite power that could be caused by Y2K problems. NIRS has not presented any information either that existing requirements and licensee commitments are inadequate to address losses of power due to Y2K problems, such that the requirements proposed in NIRS' petition are necessary to provide reasonable assurance of adequate protection to public health and safety. Accordingly, the

Commission denies the petition.

Dated at Rockville, Maryland, this 17th day of August, 1999.

For the Nuclear Regulatory Commission.

Andrew L. Bates,

Acting Secretary of the Commission.

[FR Doc. 99-21752 Filed 8-20-99; 8:45 am]

BILLING CODE 7590-01-P

the Emergency Services Sector Working Group for Y2K, which is headed by FEMA. In addition, to facilitate Agreement State efforts to address the Y2K issue, a link to State Government Year 2000 Web sites has been provided by the NRC. NRC will make every effort to share with the States any Y2K issue that may also affect Agreement States or Agreement State licensees.

NIRS has not explained why the approach currently being pursued by the licensees, the nuclear industry, and NRC does not provide reasonable assurance of adequate emergency response capabilities during the transition from 1999 to 2000.

In the case of research and training/test reactors, licensees of these facilities also have established programs to evaluate and correct Y2K deficiencies. Many research reactors will be shut down on January 1, 2000, as the institutions operating them (e.g., universities and laboratories) will be closed for the holiday. Further, these reactors often have passive safety features and low power levels, which ensure minimal potential offsite consequences. In addition, NRC staff concluded that any research reactor in operation on January 1, 2000, could be readily shut down manually using emergency procedures and existing shutdown systems, even if their operational systems should experience a Y2K problem.

Conclusion

Plant-specific industry planning for Y2K contingencies, which is built upon existing emergency response plans and procedures required by the current emergency preparedness regulations, provides a reasonable assurance that adequate protection measures will be taken in the event of radiological emergency during Y2K critical dates. Imposing a new prescriptive rule as proposed in the petition in an area in which the industry action is already exceeding the actions that address the petitioner's general issues would be counterproductive to the ongoing Y2K readiness efforts of the licensees. Therefore, the additional full-scale emergency planning exercise requested by the NIRS is not necessary to ensure emergency response capabilities to provide reasonable assurance of adequate protection to public health and safety despite the occurrence of Y2K problems.

For these reasons, the Commission denies the petition.

Dated at Rockville, Maryland, this 17th day of August, 1999.

For the Nuclear Regulatory Commission.
Andrew L. Bates,
Acting Secretary of the Commission.
[FR Doc. 99-21751 Filed 8-20-99; 8:45 am]
BILLING CODE 7590-01-P

NUCLEAR REGULATORY COMMISSION

10 CFR Parts 50 and 70

[Docket No. PRM-50-67]

Nuclear Information and Resource Service; Petition for Rulemaking Denial

AGENCY: Nuclear Regulatory Commission.

ACTION: Petition for rulemaking; denial.

SUMMARY: The Nuclear Regulatory Commission (NRC) is denying a petition for rulemaking (PRM-50-67) from the Nuclear Information and Resource Service (NIRS). The petitioner requested that the NRC amend its regulations to require that nuclear facilities ensure the availability of backup power sources to power safety systems of reactors and other nuclear facilities in the event of a date-sensitive, computer-related incident resulting from a Year 2000 (Y2K) issue. The petitioner requested that NRC take this action to ensure that reliable backup sources of power are available in the event of a Y2K incident. The Commission agrees that maintaining reliable emergency power is important and has considered the petitioners request as part of its review of existing regulatory requirements and licensee actions to assure reliable emergency power during the Y2K transition. Based on this review, the Commission has determined that existing regulatory requirements, actions taken by the licensees to implement a systematic and structured Y2K readiness program adequately address Y2K issues, and NRC's oversight of the licensees' implementation of these programs provide reasonable assurance of adequate protection to public health and safety. Because the Commission has concluded that existing programs already address the petitioner's concern regarding availability of emergency power, the petition is denied.

ADDRESSES: Copies of the petition for rulemaking, the public comments received, and NRC's letters to the petitioners are available for public inspection or copying in NRC Public Document Room, 2120 L Street, NW (Lower Level), Washington, DC, as well as on NRC's rulemaking web site at <http://ruleforum.llnl.gov>.

FOR FURTHER INFORMATION CONTACT: Matthew Chiramal, Office of Nuclear Reactor Regulation, US Nuclear Regulatory Commission, Washington, DC 20555-0001, telephone 301-415-2845, E-mail address mxc@nrc.gov, or Gary W. Purdy, Office of Nuclear Material Safety and Safeguards, US Nuclear Regulatory Commission, Washington, DC 20555-0001, telephone 301-415-7897, E-mail address gwp1@nrc.gov.

SUPPLEMENTARY INFORMATION:

Background

NRC received three related petitions for rulemaking (PRM-50-65, PRM-50-66, PRM-50-67), each dated December 10, 1998, submitted by the NIRS concerning various aspects of Y2K issues and nuclear safety. This petition (PRM-50-67) requested that NRC adopt regulations that would require facilities licensed by NRC under 10 CFR parts 50 and 70 to provide reliable sources of backup power. The first petition (PRM-50-65) requested that NRC adopt regulations that would require facilities licensed by NRC under 10 CFR parts 30, 40, 50, and 70 to be Y2K compliant. The second petition (PRM-50-66) requested that NRC adopt regulations that would require facilities licensed by NRC under 10 CFR part 50 to develop and implement adequate contingency and emergency plans to address potential system failures. Because of the nature of these petitions and the date-specific issues they address, the petitioner requested that the petitions be addressed on an expedited schedule.

On January 25, 1999, NRC published a notice of receipt of a petition for rulemaking in the **Federal Register** (64 FR 3789). It was available on NRC's rulemaking website and in the NRC Public Document Room. The notice of receipt of a petition for rulemaking invited interested persons to submit comments by February 24, 1999.

The Petition

The petitioner requested that NRC adopt the following text as a rule:

The Nuclear Regulatory Commission recognizes that date-sensitive computer programs, embedded chips, and other electronic systems that perform a major role in distributing, allocating, and ensuring electric power throughout the United States may be prone to failure beginning on January 1, 2000. Loss of all alternating current electricity from both the offsite power grid and onsite emergency generators (commonly known as "station blackout") long has been identified by NRC as among the most prominent contributors to risk for atomic reactors.

(1) For these reasons, NRC requires of part 50 and 70 licensees as of December 1, 1999:

(a) that all emergency diesel generators that provide backup power to nuclear licensees must be operational and remain operational; (b) that licensees that cannot demonstrate full operational capabilities of all emergency diesel generators must close until such time that full operational capabilities of emergency diesel generators are attained; (c) that all licensees must have a 60-day supply of fuel for emergency diesel generators.

(2) Further, to ensure adequate protection of public health and safety, NRC requires that all licensees under these sections must provide alternate means of backup power sufficient to assure safety. These may include, but are not limited to: solar power panels, wind turbines, hydroelectric power, biomass power, and other means of generating electricity. These additional backup systems must provide electricity directly to the licensee rather than to the broader electrical grid.

(3) Irradiated fuel pools are to be immediately classified as Class 1-E; backup power systems must be sufficient to provide cooling for such pools. Licensees which cannot demonstrate compliance with sections (1) and (2) must cease operations as of December 1, 1999, until compliance with these sections is attained.

The petitioner acknowledged that NRC has recognized the potential safety and environmental problems that could result if date-sensitive electronic systems fail to operate or provide false information. The petitioner asserted that NRC has required its licensees of reactor and major fuel cycle facilities to report by July 1, 1999, on their programs to ensure compliance with Y2K issues.

The petitioner discussed the "availability of electricity to power atomic reactor and other nuclear facility safety systems." The petitioner explained that electricity is required to operate atomic reactor safety and cooling systems and that this electricity is provided by offsite sources (overall an electrical grid). The petitioner commented that NRC has long recognized that the loss of all alternating current from both onsite and offsite systems, known generally as "station blackout," is the most important contributor to risk at most atomic reactors. The petitioner correctly noted that NRC has required licensees to have backup sources of onsite emergency power, normally multiple emergency diesel generators, capable of supplying the electricity necessary to operate essential safety systems.

The petitioner asserted that the emergency diesel generators (EDGs) used at atomic reactors have proven unreliable and are often out of service. The petitioner claimed that the unprecedented condition posed by the Y2K problem, coupled with the demonstrated and ongoing failures of EDGs, constitutes reasonable doubt that

EDGs can be relied on. Therefore, the petitioner believes that NRC should adopt regulations that require that licensees have all EDGs operational during the Y2K transition, that they have a 60-day supply of fuel as of December 1, 1999, and that licensed facilities that cannot meet these requirements be closed.

The petitioner discussed the likelihood and the potential consequences of a failure of all or a portion of the electric power grid in the United States. The petitioner recognized that the failure of all or a portion of the electrical grid as a result of Y2K issues is well beyond the scope of NRC's authority. However, the petitioner stated that the extended failure of all or a portion of the electrical grid would place severe stress on the current EDG system of backup power supply and that the failure of EDGs at one or more reactor sites could result in extended station blackouts and nuclear catastrophes. The petitioner asserted that this possibility is well within the range of probabilities for which NRC routinely requires action by its licensees. The petitioner further asserted that reliance on unreliable EDGs is insufficient under these conditions. Therefore, the petitioner believes that it is essential that NRC take the regulatory action suggested in this petition on an expedited basis.

Public Comments on the Petition

In response to the petition, NRC received 73 comment letters, which included 1 letter signed by 25 citizens of the State of Michigan, 3 letters from nuclear associated industries, 10 letters from utilities, 14 letters from private organizations, and 45 letters from private citizens.

Fifty-six letters supported the petition, of which 41 were from private citizens, 14 were from private organizations, including 1 from the NIRS and 1 signed by 25 individuals. The comments supporting the petition addressed the concern that diesel generators are unreliable and that a reliable electric power grid is needed.

In some of the letters supporting the petition, the authors included the following additional comments that provide information or requested action that was not contained in the petition. These comments noted that—

1. Y2K may increase the possibility of local, regional or widespread blackouts. Losing all electric power to the station is called station blackout. EDGs, each capable of powering the entire plant, compensate for the loss of off-site electric power. Reliability of diesel generators is considerably lower than

required and, moreover, one of two diesel generators is often out of service. Therefore, for Y2K, an additional source of backup power needs to be provided, and both EDGs should be operable with sufficient fuel on site to compensate for fuel delivery problems.

2. In order to ensure that sufficient electric power is available during an extended loss of offsite power to safely shut down a nuclear plant and cool the spent fuel pool, enough diesel fuel should be available at the site for periods extending from 60 days to 160 days to whatever the time period that offsite power is not available.

3. An additional power source or method should be available during power failure to provide makeup water to the spent fuel pool.

4. On at least one occasion, a nuclear power plant licensee falsified data relative to the reliability of EDGs. The concern is that other nuclear utilities may not provide reliable data for their EDGs to NRC. These comments are addressed specifically in the discussion of "Reasons for Denial."

Seventeen letters opposed the petition, including 4 from private citizens, 3 from nuclear associated industries, and 10 from utilities. Comments opposing the petition stated that onsite emergency electric power generators are already required to be maintained in a state of readiness and validated by periodic testing, fuel supplies are maintained at a level adequate to facilitate appropriate response/recovery actions, and the current regulations and license conditions are adequate to address the issue. One commenter used a specific facility as an example to demonstrate that in the highly unlikely event of a total loss of electrical power (meaning the loss of the electric grid and backup power) the conditions at that facility would not threaten public health and safety. Any potential adverse impacts would be limited to work areas and equipment within the facility, and there would be no catastrophic or significant loss of control or containment of nuclear material. That commenter indicated that the provision of a tertiary (meaning a secondary backup) source of electric power to its fuel facility, which would be independent of the broader electric grid, as would be required under PRM-50-67, is an unreasonable requirement that would force shutdown of the facility on December 1, 1999, in the absence of any significant credible safety risk.

Reasons for Denial

NRC is denying the petition because the Commission has determined that

current NRC regulations and license conditions governing power systems at part 50 and 70 facilities provide reasonable assurance of adequate protection to public health and safety, and licensees are taking appropriate actions to provide reasonable assurance that Y2K problems will not adversely affect the functioning of these power systems. The NRC is reviewing the licensees' implementation of these Y2K activities and will have sufficient time to take appropriate regulatory action if licensees' Y2K activities and programs are not properly implemented in a timely fashion. NIRS does not explain why the licensees' Y2K activities and programs, and NRC's oversight of the licensees' implementation of these activities and programs, are inadequate such that the rule proposed by NIRS is necessary to provide reasonable assurance of adequate protection from Y2K-induced unavailability of onsite power systems.

NIRS' proposed rule contained three separate requirements for Part 50 and Part 70 licensees: (1) Operational demonstration of EDGs and provision of a 60-day diesel fuel supply; (2) alternate means of backup power; and (3) classification of fuel pools as Class 1-E. Facilities that cannot demonstrate compliance with these requirements by December 1, 1999, would be required to shut down until they could demonstrate compliance. The proposed requirements are addressed below for part 50 power reactors, part 50 decommissioning reactors, part 50 non-power reactors, and part 70 licensees in Sections I, II, III, and IV, respectively.

I. Part 50 Nuclear Power Plants

A. Diesel Generator Operational Capability and Sixty-Day Fuel Supply

Nuclear power plants must be protected against loss of offsite power (LOOP) by providing an onsite backup power system by either 10 CFR part 50, Appendix A, General Design Criteria (GDCs) 17 and 18, or equivalent requirements in the plant's licensing basis. Most licensees rely upon diesel generators to provide onsite backup power, although there is at least one licensee that relies upon hydroelectric power. All licensees have committed to provide an onsite supply of fuel to operate diesel generators; most commitments are for a 7-day supply. In addition, nuclear power plants are required by 10 CFR 50.63 to have the capability to withstand loss of all ac power (generally referred to as "station blackout" [SBO]) for an established period of time. As indicated in Section I.A.2 there is no reason to believe that

Y2K would significantly affect the probability or duration of a LOOP and/or a SBO from that otherwise assessed in a licensee's coping analysis required by 10 CFR 50.63. To demonstrate that their plants can cope with SBO, some licensees rely upon an alternate ac power source(s) (separate from the backup power system) that utilizes diesel generators or gas turbine generators.

1. EDG Reliability

NIRS claims that EDGs have proven to be unreliable, such that licensees should be required to demonstrate "full operational capability"¹ of EDGs that provide backup power. As previously noted, backup onsite power is usually provided by diesel generators, which supply electric power to the plant safety systems upon a LOOP. NRC regulations require that onsite electric power supplies and the onsite electric distribution system have sufficient independence, redundancy, and testability to perform their safety functions assuming a single failure. Furthermore, in accordance with their license conditions, all licensees are required to have backup electricity sources operational to supply safety-related equipment at all times independent of circumstances such as Y2K-induced LOOP. The operation and maintenance of diesel generators and other safety-related equipment necessary for the safe shutdown of the reactor are controlled by the plant technical specifications (TSs). The TSs are intended to ensure that sufficient power will be available to supply safety-related equipment at all times regardless of key Y2K dates. Moreover, the plant TSs require that immediate action be taken to restore inoperable diesel generators to operable status. The plant TSs require the diesel generators to be tested routinely in order to demonstrate their operability and their ability to supply power as needed.

NIRS did not present any information demonstrating that diesel generators are unreliable such that they should not be relied upon to provide backup power upon a LOOP. For each nuclear power plant, selected target diesel generator reliability values were established for plant-specific coping analysis in accordance with the requirements of 10 CFR 50.63, the SBO rule. Availability

¹ The NRC assumes that by "capability," NIRS actually means "reliability" because "capability" normally refers to the ability of the emergency power system to power safety related electrical loads at the plant; whereas reliability normally refers to the actual performance of the system in terms of availability, which is what NIRS addresses in its petition.

and reliability values are tracked by each licensee in accordance with the requirements of 10 CFR 50.65, the maintenance rule, and associated industry guidance.

In the resolution of Generic Safety Issue B-56, "Diesel Generator Reliability," one of the options recommended by NRC staff was to revise the SBO rule to include specific requirements for demonstrating diesel generator reliability. However, in SECY-93-044, "Resolution of Generic Safety Issue B-56, Diesel Generator Reliability," dated March 25, 1993, the Commission disapproved the revision to the SBO rule on the basis of the real progress made by the nuclear industry in improving the reliability of the diesel generators. NRC requirements and industry activities have resulted in a very high diesel generator reliability. In 1993, the industry-wide average reliability of diesel generators was in excess of 98 percent. An Idaho National Engineering Laboratory study (INEL-95-0035, "Emergency Diesel Generator Power System Reliability: 1987-1993") of a number of nuclear power EDG reliability concluded that those plants with a 0.950 reliability target goal were actually demonstrating 0.987, and the plants with a 0.975 reliability target goal were actually demonstrating 0.985. The Commission stated that the industry should continue an aggressive program of maintenance as well as root cause analysis that will continue to offer assurance that diesel generator reliability will be maintained at a satisfactory level in the future.

All licensees have implemented a maintenance monitoring program consistent with the maintenance rule, which became effective on July 10, 1996. Licensees are required to monitor the performance of diesel generators against the established goals and to take appropriate corrective actions if the goals are not met. The maintenance rule requires that these goals be evaluated by the licensees at least every refueling cycle, not to exceed 2 years. To evaluate the process established by licensees to set goals and monitor them, and to verify that preventive maintenance has been effective for systems and components under the maintenance rule, NRC staff conducted baseline inspections of all nuclear plants during 1996-1998. At several plants, diesel generators were among the systems and components reviewed to verify that goals were established and monitoring and trending were being performed. For pilot plants, diesel generators continue to be inspected and evaluated using the risk-informed, performance-based inspection process, which is part of the

NRC Oversight Baseline Inspection Program. NRC staff will continue to assess the reliability of diesel generators at nuclear power plants to ensure that the reliability of diesel generators is maintained at levels specified by each licensee when it performed its plant-specific coping analyses for SBO.

Additionally, the scope of licensees' Y2K programs, including contingency planning, covers the onsite power and other emergency power systems at the plant. NRC audits and reviews of licensee Y2K program activities to date have verified licensee consideration of these systems, and no associated Y2K issue relating to onsite power systems have been identified.

The NRC does not believe, on the basis of current information from the North American Electric Reliability Council (NERC),² that availability of offsite power from the electrical grid is likely to be significantly affected by Y2K-induced problems. In its most recent reports issued on January 11 and April 30, 1999, NERC states, "Transmission outages are expected to be minimal and outages that may occur are anticipated to be mitigated by reduced energy transfers established as part of the contingency planning process." Both reports indicate that the transition through critical Y2K rollover dates should have a minimal impact on electric systems operations in North America and that widespread, long-term loss of the grid as a result of Y2K-induced events is not a credible scenario. Therefore, there is no reason to believe that Y2K would significantly affect the probability or duration of a LOOP and/or a SBO from that otherwise assessed in the licensee's coping analysis required by 10 CFR 50.63.

As discussed above, the diesel generators and associated onsite power supply systems, being within the scope of licensees' Y2K readiness programs, will be Y2K ready prior to the Y2K transition, and no decrease in reliability of the diesel generators is expected. The information provided by NERC indicates that the likelihood of a LOOP is not expected to increase significantly during Y2K transition. Based on these considerations, plus the ability of the plants to cope with a station blackout, the likelihood of an event that will

jeopardize public health and safety is acceptably low.

One of the public comments received by NRC in response to the petition indicated a concern regarding falsification of EDG reliability data by licensees. This particular concern has been investigated and resolved as documented in an NRC memorandum dated December 20, 1993, from the Office of Investigations to the Region II Regional Administrator, "Vogtle Electric Generating Plant: Alleged False Statements Regarding Test Results on Emergency Diesel Generators (Case No. 2-90-020R)." Falsification of EDG failure data by licensees is not considered by NRC as an industry-wide, generic occurrence. Such incidents, when identified, will continue to be treated by NRC on a case-by-case basis and appropriate actions will be taken in response.

2. Sixty-day fuel supply

NIRS' proposed rule would require each nuclear power plant licensee to have a 60-day onsite supply of fuel for diesel generators, as opposed to a 7-day fuel supply to which most licensees have committed. However, NIRS provided no technical basis why offsite power from the grid would not be reestablished within the 7-day period accommodated by existing onsite fuel supplies. Nor did NIRS explain why, should a LOOP continue for longer than 7 days, a licensee would be unable to resupply diesel fuel for a period of 60 days so that a 60-day fuel supply must be maintained onsite. Commenters on the NIRS petition who suggested a requirement for a larger fuel supply (able to accommodate 160 days of operation without resupply) also did not provide any technical bases for their recommendations. As stated previously, the likelihood or duration of a LOOP is not expected to be significantly affected by the Y2K issue.

Furthermore, the NRC licensees are taking appropriate actions to ensure that their plants will be able to cope with Y2K-induced LOOP durations longer than 7 days. As part of each plant's Y2K activities, each licensee is preparing a contingency plan, which includes obtaining diesel fuel and other necessary supplies to cope with Y2K-induced long-term LOOP events. As part of NRC's review of licensees' implementation of their Y2K programs, NRC will confirm that licensee Y2K programs address emergency power sources, arrangements for obtaining critical commodities (e.g., EDG fuel oil) and other considerations for contingency planning identified in Nuclear Energy Institute/Nuclear

Utilities Software Management Group (NEI/NUSMG) 98-07, "Nuclear Utility Year 2000 Readiness Contingency Planning," dated August 1998.

The capability of diesel generators and the adequacy of existing fuel supplies have been demonstrated at numerous plants during weather-induced interruptions of the power grid and other cases of LOOP from the grid. An example is the Turkey Point nuclear plant LOOP event during the August 1992 Hurricane Andrew when the diesel generators automatically picked up safety-related loads and maintained the plant for an extended period (over 6 days) during the recovery until site power was restored. NRC considers the current 7-day fuel capacity to be sufficient to operate diesel generators for longer than the time that it takes to replenish the onsite supply from outside sources. Accordingly, a rule requiring licensees to maintain sufficient fuel to operate their diesel generators for a 60-day period or longer is not necessary to provide reasonable assurance of adequate protection against Y2K-induced LOOP events. The regulation requires nuclear power plants to withstand LOOP events regardless of whether the LOOP is due to Y2K or other causes. The petitioner has not demonstrated that Y2K would significantly affect the probability or duration of loss of all alternating current power from that otherwise assumed in the licensee's coping analysis required by 10 CFR 50.63, and the licensees' coping analyses continue to be applicable during the period that NIRS claims would present an increased susceptibility to a LOOP.

B. Additional Alternate Means of Backup Power

NIRS' petition requests NRC to require all licensees to provide an alternate (second) means of backup power, such as solar power panels, wind turbines, hydroelectric power, and biomass power. The petition also requests NRC to require that the alternate backup power system provide electricity directly to the licensee rather than to the broader electrical grid.

1. Need for Additional Backup Power Source

As discussed in Section I.A.1 above, not only must licensees provide a source of backup power upon a LOOP, some licensees have provided an alternate ac power source in order to demonstrate that they are able to cope with a LOOP concurrent with a loss of onsite backup power (an SBO) for a specified duration. Thus, these licensees have three sources of power: (1) Offsite

² NERC is an electric industry organization made up of 10 Regional Reliability Councils that account for nearly every bulk electric supply and delivery organization in the interconnections of North America. NERC and its Regional Reliability Councils set operating and engineering standards for the reliability of electric systems in North America. In May 1998, U.S. Department of Energy requested NERC to facilitate the electric industry's Y2K effort.

power from two independent circuits; (2) onsite backup power from independent, redundant power supplies; and (3) alternate ac power. The NRC does not believe that the NIRS' proposal for a fourth source of power ("alternative backup power," in the words of NIRS) is necessary to provide reasonable assurance of adequate protection against Y2K-induced problems.

The petitioner does not explain why Y2K would affect diesel generators as a source of backup and/or alternate ac power, such that a source of power *in addition* to diesel generators is necessary to address SBO. The scope of the licensees' Y2K program covers both the onsite backup and the alternate ac power systems at nuclear power plants. Since 1996, NRC has been working with the nuclear industry and licensees of operating nuclear power plants in order to achieve Y2K readiness at all nuclear power plants. NRC has issued Information Notice (IN) 96-70, "Year 2000 Effect on Computer System Software," on December 24, 1996; Generic Letter (GL) 98-01, "Year 2000 Readiness of Computer Systems at Nuclear Power Plants," on May 11, 1998; and GL 98-01, Supplement 1, "Year 2000 Readiness of Computer Systems at Nuclear Power Plants," on January 14, 1999.

NRC issued IN 96-70 to alert nuclear power plant licensees of the Y2K problem. The information notice described the potential problems that nuclear power plant computer systems and software may encounter during and following the transition into the year 2000 and how the Y2K issue may affect NRC licensees. IN 96-70 encouraged licensees to examine their uses of computer systems and software well before the year 2000 and suggested that licensees consider appropriate actions for examining and evaluating their computer systems for Y2K vulnerabilities.

In GL 98-01, NRC endorsed the guidance in the industry document issued by the NEI/NUSMG 97-07, "Nuclear Utility Year 2000 Readiness," when properly augmented in the area of risk management, contingency planning, and remediation of embedded systems, as one possible approach in implementing a plant-specific Y2K readiness program. In August 1998, NEI issued an industry document, NEI/NUSMG 98-07, which provided additional guidance in the area of internal and external risk management and contingency planning. External events that should be considered for facility-specific contingency planning include electric grid/transmission/

distribution system events (e.g., a LOOP, grid instability and voltage fluctuations, load fluctuations and loss of grid control systems), loss of emergency plan equipment and services, loss of essential services, and depletion of consumables. The NRC considers the guidance in NEI/NUSMG 98-07, when properly implemented, as an acceptable approach to mitigate and manage Y2K-induced events that could occur on Y2K-critical dates.

In GL 98-01, NRC requested that all operating nuclear power plant licensees submit written responses regarding their facility-specific Y2K readiness programs in order to obtain confirmation that licensees are addressing the Y2K problem effectively. All licensees have responded to GL 98-01, stating that they have adopted plant-specific programs that are intended to make the plants Y2K ready by July 1, 1999. GL 98-01 also requests a written response, no later than July 1, 1999, confirming that these facilities are Y2K ready, including contingency planning. Licensees who are not Y2K ready by July 1, 1999, must provide a status report and schedule for the remaining work to ensure timely Y2K readiness.

As part of its oversight of licensee Y2K activities, the NRC staff conducted sample audits of 12 plant-specific Y2K readiness programs. The objectives of the audits were as follows:

1. To assess the effectiveness of licensee programs for achieving Y2K readiness and in addressing compliance with the terms and conditions of their license and NRC regulations and continued safe operation.

2. To evaluate program implementation activities to ensure that licensees are on schedule to achieve Y2K readiness in accordance with GL 98-01 guidelines.

3. To assess the licensee contingency planning for addressing risks associated with events resulting from Y2K problems.

NRC staff determined that this approach was an appropriate means of oversight of licensee Y2K readiness efforts because: (1) All licensees had committed to the nuclear power industry Y2K readiness guidance (NEI/NUSMG 97-07) in their first response to NRC GL 98-01; and (2) the audit would verify that licensees were effectively implementing the guidelines. The sample of 12 licensees included large utilities such as Commonwealth Edison and Tennessee Valley Authority, as well as small single-unit licensees such as North Atlantic Energy (Seabrook) and Wolf Creek Nuclear Operating Corporation. NRC staff selected a variety of types of plants of different ages and

locations in this sample in order to obtain the necessary assurance that nuclear power industry Y2K readiness programs are being effectively implemented and that licensees are on schedule to meet the readiness target date of July 1, 1999, established in GL 98-01.

In late January 1999, NRC staff completed the 12 audits. On the basis of the audit observations, NRC staff has concluded that licensees are effectively addressing Y2K issues and are undertaking the actions necessary to achieve Y2K readiness in accordance with the GL 98-01 target date, although some plants will have some remediation, testing, and final certification scheduled for the fall 1999 outage. NRC staff did not identify any issues that would prevent these licensees from achieving readiness.

The NRC staff is not aware of any Y2K problems in nuclear power plant systems that directly affect actuation of safety functions, including the emergency onsite power systems. Moreover, NRC audit results to date have not identified any associated residual Y2K problems with the emergency onsite power system and have confirmed the licensees' consideration of these systems. Also, the audits did not identify any Y2K problem in safety-related activation systems.

Additionally, the NRC's regional staff reviewed Y2K activities at all operating nuclear power plants to verify the status of licensee efforts to ensure that all plants will be able to function safely on January 1, 2000, and beyond. These reviews: (1) Verified that all NRC licensees have implemented Y2K program activities; (2) evaluated the progress made to ensure that the licensees are on schedule to achieve Y2K readiness; and (3) assessed licensees' contingency plans for addressing Y2K-related issues. The reviews were completed by July 1999.

The NRC staff audited the contingency planning efforts of six licensee facilities. The audits at these facilities examined in detail backup measures the utilities have in place to deal with possible Y2K problems, either on site or off site, that might affect plant operations. The audits were conducted in May and June 1999.

The reviews and audits will allow NRC staff to verify the progress of all licensees and determine whether any regulatory action is needed. Information from the reviews will be used in conjunction with the status reports that NRC has required its nuclear power plant licensees to provide by July 1, 1999. By July 1, 1999, all licensees responded to GL 98-01, Supplement 1.

The responses indicated that 68 plants are Y2K ready and 35 plants need to complete work on computer systems or devices after July 1, 1999.

NIRS presents no information or argument why these actions by the licensees, the nuclear industry, and NRC are not sufficient to ensure that onsite back up and alternate ac power systems will not be adversely affected by Y2K-induced problems.

2. Specific Backup Power Sources Proposed by NIRS

The petitioner's proposed alternative backup power sources, such as solar and wind, are not reliable backup power sources because of their undependability under unpredictable weather conditions or because they are limited by the amount of power they can generate. Additional comments received by the NRC in response to the petition also suggested the requirement for alternate power. The petitioner does not provide sufficient technical information to demonstrate that these additional alternative backup power sources would add more reliability than current backup power sources. Therefore, most of the sources of alternative backup power that are included in NIRS' proposed rule would not constitute an acceptable alternative source of backup power with the same level of availability and capability as diesel generators.

C. Spent Fuel Pool Class 1E Classification and Backup Power

The proposed rule would require all part 50 licensees to immediately classify irradiated (spent) fuel pools as Class 1-E and provide sufficient backup power to provide cooling to these pools. Because Class 1-E is an electric system classification, the NRC assumes that the petitioner intends the rule to require that the backup power supply for spent fuel pool cooling systems be classified as Class 1-E.

The petitioner does not explain why classification of the electric power system for spent fuel pool cooling systems as Class 1-E is necessary to protect spent fuel pools against a Y2K-induced LOOP. The Class 1-E classification addresses design and quality assurance (QA) requirements for manufacture and installation of electrical system components. Most of these systems are based upon analog controls and, therefore, are not subject to Y2K problems. Furthermore, simple reclassification of the electrical power system by itself would not appear to have any direct effect on minimizing Y2K-induced loss of power necessary for spent fuel cooling. Rather, an

evaluation of the power system for Y2K susceptibility is necessary, which is what licensees have committed to implement. Thus, it is unclear how the requested requirements in the NIRS petition would provide assurance that Y2K problems will not prevent electrical power systems from performing their necessary safety functions. The NRC concludes that a rule change is not necessary since licensees are already directly addressing spent fuel pool cooling as part of their Y2K programs.

Furthermore, the NRC does not agree that a backup source of electrical power for spent fuel cooling is necessary at nuclear power plants in order to provide reasonable assurance of adequate protection. At most operating nuclear power plants, the emergency onsite power system can directly supply electric power to its spent fuel pool cooling systems. At those plants at which the spent fuel cooling system is not directly connected to the emergency onsite power system, the capability exists of connecting the cooling system to the emergency onsite power system. Requiring a backup (tertiary) source of electrical power is not justified in view of the length of time between loss of spent fuel cooling and the point at which there is a significant threat to integrity of the spent fuel rods. A licensee is required to keep the spent fuel pool filled to a level more than 23 feet above the top of the fuel rods and, generally, the water temperature in the pool is to be maintained below 140 °f. For a typical pool with a capacity of about 400,000 gallons and a worst case heat load causing 50 gpm of water loss as a result of evaporation, it would take about 3 days for the pool level to drop to the top of the fuel racks. This estimate does not include the heat-up time of 3 to 4 hours for the pool water to increase from 140 °f to 212 °f. This scenario assumes a total loss of all ac electric power and that no corrective actions are taken for 3 days in response to the decreasing water level in the spent fuel pool. For a typical heat load (non-refueling), the time to uncovering of the spent fuel pool would be around 2 weeks, again assuming that no make-up water is added to the pool. Upon loss of water shielding, the radiation levels above the pool would increase. Assuming LOOP and failure of onsite emergency power sources, the only action necessary would be to provide make-up water to the spent fuel pool. The existing plant operating/emergency procedures provide for initiation of make-up water to the pool upon detection of low level. At many plants,

the make-up water supply is provided by a plant safety system. Upon loss of all ac power, make-up water from any source, such as fire hoses supplied by diesel-driven fire pumps, can be used to maintain the required water level in the pool. In light of the substantial period of time available for a licensee to take mitigative actions upon loss of spent fuel pool electrical power, the NRC concludes that providing an additional backup source of power is not warranted at any operating nuclear power plant.

II. Part 50 Decommissioning Nuclear Power Plants

There are 21 permanently shutdown nuclear power plants which have been shut down for more than a year. Six of these facilities have removed all spent fuel from the site. Therefore, there are only 15 decommissioning power plants to which the proposed requirements in the petition would potentially apply.

Spent fuel pool cooling and support systems may be configured differently for decommissioning plants than for operating reactors due to the reduced need for decay heat removal at decommissioning plants. As decay heat loads drop, utilities are able under 10 CFR 50.59 to remove equipment from service once it no longer is needed to provide its safety function. At some plants there is no need for forced circulation to remove heat from the pool as adequate heat loss to ambient keeps the pool at an acceptable temperature. After a period of decay in the spent fuel pool, the heat load from spent fuel is significantly reduced as short-lived fission products decay. Consequently, the potential for boiling is reduced and the time available for the licensee to take mitigative action is greater. With the exception of Zion and Big Rock Point, more than three years has elapsed since any fuel was irradiated in the reactor at any of the nuclear power plants currently undergoing decommissioning.

The reasons discussed in Section I.C above regarding why electrical systems need not be classified Class 1-E for spent fuel pools at operating nuclear power plants also apply equally to decommissioning nuclear power plants. As previously noted, requiring a backup source of electrical power is not justified in view of the length of time between loss of spent fuel cooling and the point where there is a significant threat to integrity of the spent fuel rods. Upon loss of all ac power, make-up water from any source, such as fire hoses supplied by diesel-driven fire pumps, can be used to maintain the required water level in the pool.

In view of the long time period available for the licensee to respond to loss of power to the spent fuel pool cooling system and the relative simplicity of mitigative actions, the requirements proposed by NIRS with respect to spent fuel pool electrical system reclassification and the provision of alternative power are not justified.

III. Part 50 Non-Power Reactor Licensees

Non-power reactors operate at power levels ranging from 250 KWt to 2 MWt, and they operate at low temperatures. Any non-power reactor in operation on January 1, 2000, can be readily shut down manually using emergency procedures and existing shutdown systems. These reactors have passive safety features and generally do not require power to shut down and dissipate decay heat. Accordingly, NRC regulations do not currently require part 50 non-power reactors to provide a backup power source.

NIRS did not present any information or rationale why part 50 non-power reactors must provide an "alternate" source of backup power to address Y2K losses of power. In particular, NIRS did not address the fact that these facilities are not required to have a backup power source because power is not required to shut down and maintain these facilities in a safe-shutdown condition. In the absence of any rationale in support of the proposed requirement, the Commission concludes that there is no basis for adopting the proposed requirement for part 50 non-power reactor licensees.

IV. Part 70 Licensees

To alert major part 70 licensees of the Y2K problem, NRC issued Information Notice (IN) 96-70 in December 1996, and IN 98-30 in August 1998. In IN 96-70, NRC staff described the potential Y2K problems, encouraged licensees to examine their uses of computer systems and software well before the year 2000, and suggested that licensees consider appropriate actions to examine and evaluate their computer systems for Y2K vulnerabilities. In IN 98-30, NRC staff provided definitions of "Y2K ready" and "Y2K compliant," encouraged licensees to contact vendors and test their systems for Y2K problems, and described elements of a Y2K readiness program.

In order to gather Y2K information regarding materials and major fuel cycle facilities, NRC formed a Y2K Team within the Office of Nuclear Material Safety and Safeguards (NMSS) in 1997. From September through December

1997, this NMSS Y2K Team visited a cross-section of materials licensees and fuel cycle facilities and conducted Y2K interviews. Each licensee or facility visited by the team indicated that it was aware of the Y2K issue and was in various stages of implementing its Y2K readiness program.

On June 22, 1998, the NRC staff issued Generic Letter (GL) 98-03, "NMSS Licensees and Certificate Holders' Year 2000 Readiness Programs," requested major part 70 licensees to inform NRC of the status of their Y2K readiness programs. In GL 98-03, the NRC staff requested all major part 70 licensees to submit by September 20, 1998, written responses regarding their facility-specific Y2K readiness program in order to confirm that they were addressing the Y2K problem effectively. All licensees responded to GL 98-03 by stating that they had adopted a facility-specific Y2K readiness program, and the scope of the program included identifying and, where appropriate, remediating embedded systems, and provided for risk management and the development of contingency plans. GL 98-03 also requested a written response, no later than December 31, 1998, which confirmed that these facilities were Y2K ready or provided a status report of work remaining to be done to become Y2K ready, including completion schedules. All licensees provided a second response to GL 98-03, which provided reports of work to be done, including completion schedules. Furthermore, following the second response, NRC requested a third written response, no later than July 1, 1999, which would confirm that these facilities were Y2K ready or would provide an updated status report.

Between September 1997 and October 1998, the major fuel cycle facilities were also asked Y2K questions during other inspections. On the basis of these Y2K inspections, the licensees were aware of the Y2K problem and were adequately addressing Y2K issues. There have been no identified risk-significant Y2K concerns for major part 70 licensees.

NIRS presents no information or argument why these above-mentioned actions by the licensees and NRC are not sufficient to address Y2K problems and provide reasonable assurance of adequate protection during the transition from 1999 to 2000.

EDG Reliability and Fuel Supply

The requirements proposed in the NIRS petition would require that: (1) All EDGs that provide backup power be operational and (2) licensees have a 60-day supply of fuel for EDGs or the

facility would be shut down. The petitioner indicated these requirements are necessary to protect public health and safety. However, there are no part 70 licensees required to have EDGs in order to provide backup power to protect public health and safety. In the event of the loss of electric power in part 70 facilities, processing stops and there is no need for electric power to maintain a safe condition. There are some part 70 licensees who have independent power sources in order to meet physical protection (PP) requirements. These licensees are also required to have contingency plans for PP (e.g., augmented guard force) in the event of loss of independent power. Based on the above discussion, the 60-day fuel supply requirement is also not needed for part 70 licensees to provide reasonable assurance of adequate protection to public health and safety.

The petitioner does not provide sufficient technical information to demonstrate that part 70 licensees must shut down if they do not have EDGs providing backup power or must have a 60-day fuel supply for EDGs.

Additional Alternate Means of Backup Power

NIRS asserted that NRC must require licensees to provide alternate means of backup power (e.g., solar power panels, wind turbines, hydroelectric power, biomass power). As stated above, it is not necessary for part 70 licensees to have backup power in order to shutdown to a safe condition. Also, part 70 licensees who are required to have independent power sources to meet PP requirements have contingency plans to meet the loss of the back-up power. Further, the petitioner does not provide sufficient technical information to demonstrate that these alternative back-up power sources are needed to provide reasonable assurance of adequate protection to public health and safety.

Back-up Power Supply for Spent Fuel Pool Cooling System

The proposed rule in the NIRS petition requests NRC to require that all licensees immediately classify irradiated fuel pools as Class 1-E, and provide sufficient back-up power to provide cooling to these pools. Because Class 1-E is an electric system classification, the NRC staff assumes that the petitioner intends the rule to apply to the back-up power supply for spent fuel pool cooling systems. Although some part 70 licensees have irradiated fuel at their facilities, these facilities do not store large quantities of irradiated fuel. The irradiated fuel is

used for research and development or educational purposes. If the irradiated fuel is stored in a pool, the heat generated from the fuel would be minimal and would not require a pool cooling system.

The petitioner provides no technical justification to support the proposal that spent fuel pools be immediately classified as Class 1-E. The regulatory action requested by NIRS is not required for part 70 licensees.

Conclusion

Existing NRC requirements, licensee commitments, and licensee activities and programs are sufficient to cope with losses of power, including those losses of offsite power that could be caused by Y2K problems. NIRS has not presented any information either that existing requirements and licensee commitments are inadequate to address losses of power due to Y2K problems, such that the requirements proposed in NIRS' petition are necessary to provide reasonable assurance of adequate protection to public health and safety. Accordingly, the Commission denies the petition.

Dated at Rockville, Maryland, this 17th day of August, 1999.

For the Nuclear Regulatory Commission.

Andrew L. Bates,

Acting Secretary of the Commission.

[FR Doc. 99-21752 Filed 8-20-99; 8:45 am]

BILLING CODE 7590-01-P

NUCLEAR REGULATORY COMMISSION

10 CFR Part 72

RIN 3150-AG 37

List of Approved Spent Fuel Storage Casks: (NAC-MPC) Addition

AGENCY: Nuclear Regulatory Commission.

ACTION: Proposed rule.

SUMMARY: The Nuclear Regulatory Commission (NRC) is proposing to amend its regulations to add the NAC International Multi-Purpose Canister (NAC-MPC) cask system to the List of approved spent fuel storage casks. This amendment will allow the holders of power reactor operating licenses to store spent fuel in the NAC-MPC cask system under a general license.

DATES: The comment period expires November 8, 1999. Comments received after this date will be considered if it is practical to do so, but the NRC is able to assure consideration only for comments received on or before this date.

ADDRESSES: Comments may be sent to: Secretary, U.S. Nuclear Regulatory Commission, Washington, DC 20555-0001, Attn: Rulemakings and Adjudications Staff. Hand deliver comments to 11555 Rockville Pike, Rockville, MD, between 7:30 a.m. and 4:15 p.m. on Federal workdays.

You may also provide comments via the NRC's interactive rulemaking website (<http://ruleforum.llnl.gov>). This site provides the availability to upload comments as files (any format) if your web browser supports that function. For information about the interactive rulemaking site, contact Ms. Carol Gallagher (301) 415-5905; e-mail CAG@nrc.gov.

Certain documents related to this rulemaking, including comments received by the NRC, may be examined at the NRC Public Document Room, 2120 L Street NW. (Lower Level), Washington, DC. These documents also may be viewed and downloaded electronically via the interactive rulemaking website established by NRC for this rulemaking.

FOR FURTHER INFORMATION CONTACT: Stan Turel, telephone (301) 415-6234, e-mail, spt@nrc.gov of the Office of Nuclear Material Safety and Safeguards, U.S. Nuclear Regulatory Commission, Washington, DC 20555-0001.

SUPPLEMENTARY INFORMATION:

Background

Section 218(a) of the Nuclear Waste Policy Act of 1982, as amended (NWSA), requires, "for the dry storage of spent nuclear fuel at civilian power reactor sites, with the objective of establishing one or more technologies the (Nuclear Regulatory) Commission may, by rule, approve for use at the sites of civilian nuclear power reactors without, to the maximum extent practicable, the need for additional site-specific approvals by the Commission." Section 133 of the NWSA states, in part, "(t)he Commission shall, by rule, establish procedures for the licensing of any technology approved by the Commission under section 218(a) for use at the site of any civilian nuclear power reactor."

To implement this mandate, the Commission approved dry storage of spent nuclear fuel in NRC-approved casks under a general license, publishing on July 18, 1990, a final rule in 10 CFR part 72 entitled, "General License for Storage of Spent Fuel at Power Reactor Sites" (55 FR 29181). This rule also established a new subpart L within 10 CFR part 72 entitled "Approval of Spent Fuel Storage Casks," containing procedures and

criteria for obtaining NRC approval of dry storage cask designs.

Discussion

This proposed rule would add the NAC International Multi-Purpose Canister (NAC-MPC) cask system to the list of NRC-approved casks for spent fuel storage in 10 CFR 72.214. Following the procedures specified in 10 CFR 72.230 of Subpart L, NAC International (NAC) submitted an application for NRC approval with the Safety Analysis Report (SAR): "Safety Analysis Report for the NAC Multi-Purpose Canister System (NAC-MPC), Revision 2." The NRC evaluated the NAC submittal and issued a preliminary Safety Evaluation Report (SER) on the NAC SAR and proposed Certificate of Compliance (CoC) for the NAC-MPC cask system on August 9, 1999.

The NRC is proposing to approve the NAC-MPC cask system for storage of spent fuel under the conditions specified in the proposed CoC. This cask system, when used in accordance with the conditions specified in the CoC and NRC regulations, will meet the requirements of 10 CFR part 72; thus, adequate protection of the public health and safety would be ensured. This cask system is being proposed for listing under 10 CFR 72.214, "List of approved spent fuel storage casks," to allow holders of power reactor operating licenses to store spent fuel in this cask system under a general license. The CoC would terminate 20 years after the effective date of the final rule listing this cask in 10 CFR 72.214, unless the cask system's CoC is renewed. The certificate contains conditions for use which are specific for this cask system and addresses issues such as operating procedures, training exercises, and spent fuel specification.

The proposed CoC for the NAC-MPC cask system and the underlying preliminary SER, dated August 9, 1999, are available for inspection and comment at the NRC Public Document Room, 2120 L Street, NW. (Lower Level), Washington, DC. Single copies of the proposed CoC and preliminary SER may be obtained from Stan Turel, Office of Nuclear Material Safety and Safeguards, U.S. Nuclear Regulatory Commission, Washington, DC 20555, telephone (301) 415-6234, email spt@nrc.gov.

Discussion of Proposed Amendments by Section

Section 72.214 List of approved spent fuel storage casks.

Certificate Number 1025 would be added indicating that:

[Federal Register: July 30, 1999 (Volume 64, Number 146)]

[Notices]

[Page 41474-41476]

From the Federal Register Online via GPO Access [wais.access.gpo.gov]

[DOCID:fr30jy99-157]

NUCLEAR REGULATORY COMMISSION

[NUREG-1600, Revision 1]

Policy and Procedure for NRC Enforcement Actions; Interim
Enforcement Policy Regarding Enforcement Discretion for Nuclear Power
Plants During the Year 2000 Transition

AGENCY: Nuclear Regulatory Commission.

ACTION: Policy statement; amendment.

SUMMARY: The Nuclear Regulatory Commission (NRC) is amending its
`General Statement of Policy and Procedure for NRC Enforcement
Actions,' NUREG-1600, Revision 1 (Enforcement Policy), by adding
Appendix E. This amendment adds an interim enforcement policy that the
NRC will follow to exercise enforcement discretion for noncompliance
with license conditions, including technical specifications (TSS),
because of year 2000 (Y2K) related situations.

DATES: This action is effective August 30, 1999. Comments on this
revision should be submitted within 30 days of publication in the
Federal Register and will be considered by the NRC prior to the next
Enforcement Policy revision.

ADDRESSES: Submit written comments to David L. Meyer, Chief, Rules and
Directives Branch, Division of Administrative Services, Office of
Administration, Mail Stop T-6 D59,
U.S. Nuclear Regulatory Commission, Washington, DC 20555-0001. Hand
deliver comments to 11555 Rockville Pike, Rockville, Maryland, between
7:30 a.m. and 4:15 p.m., Federal workdays. Copies of comments received
may be examined at the NRC Public Document Room, 2120 L Street, NW,
(Lower Level), Washington, DC.

FOR FURTHER INFORMATION CONTACT: Richard Wessman, Deputy Director, Division of Engineering, 301-415-3298, or Allen Hansen, Lead Project Manager, Division of Licensing, Project Management, 301-415-1390, Office of Nuclear Reactor Regulation, U.S. Nuclear Regulatory Commission, Washington, D.C. 20555-0001.

SUPPLEMENTARY INFORMATION:

Background

Y2K-related events arise from a date-related problem that is experienced by a software system, a software application, or a digital device at a key rollover date when the system, application, or device does not perform its intended function. The key rollover dates are January 1, 2000; February 29, 2000 (an uncommon leap day); and December 31, 2000 (the 366th day of an uncommon leap year). The nuclear utility industry is engaged in Y2K readiness programs at all nuclear power plant facilities to seek out and correct Y2K-related problems that have any potential to adversely affect facility operations.

Y2K concerns result from licensees' reliance upon:

- (1) Software to schedule maintenance and technical specification surveillances;
- (2) Programmable logic controllers and other commercial off-the-shelf software and hardware;
- (3) Digital process control systems;
- (4) Software to support facility operation;
- (5) Digital systems for collection of operating data; and
- (6) Digital systems to monitor post-accident plant conditions.

It is recognized that in spite of every reasonable effort by licensees to identify and correct Y2K computer system problems at their facilities, some software, applications, equipment, and systems may remain susceptible to the problem. Additionally, software, data, and systems external to the facility could adversely affect the facility (for example, interruption of communications or partial loss of offsite power).

The electricity production and delivery systems, as two of the more important elements of the North American economic and social infrastructure, must remain dependable during Y2K transition or rollover periods. Most other critical elements of the infrastructure depend on the availability of an interconnected, stable, and reliable supply of electrical power. There is no doubt that cascading or even localized outages of generators and transmission facilities could have serious short-term and long-term consequences.

Continued safe operation of nuclear power plants during Y2K transition or rollover periods will play a major role in maintaining

stable and reliable electrical power supply systems, providing necessary reserve power if there are major losses at other generating facilities. The NRC staff is issuing interim guidance on the process for the NRC to exercise enforcement discretion in certain situations where power reactor licensees encounter Y2K-associated compliance problems in the Y2K transition period (December 31, 1999, through the first few days of 2000) or in other key rollover periods. The exercise of enforcement discretion may support a licensee decision to keep the

[[Page 41475]]

plant in operation, if the licensee has determined that safety will not be unacceptably affected, in order to help maintain electrical grid stability and reliability. The NRC Headquarters Operations Center and the NRC Region IV Incident Response Center will have staff augmented during the key transition from December 31, 1999, to January 1, 2000, to ensure that appropriate actions can be taken for any regulatory issues that arise.

Scope

This interim enforcement policy provides for the exercise of enforcement discretion to address noncompliance with license conditions, including TSs, because of Y2K transition or rollover issues. The interim enforcement policy applies to situations in which plant operation is needed to help maintain the stability and reliability of the electrical power supply system, even when license conditions, including TSs, would require a plant shutdown. If such situations occur, licensees are expected to follow the existing guidance in NRC Inspection Manual Part 9900 for Notices of Enforcement Discretion <<http://www.nrc.gov/NRC/IM/noed.html>> to the maximum extent practicable, particularly regarding a safety determination and notification of NRC. Licensees may decide to continue operations upon making a determination that it is safe and prudent to do so to help maintain electrical grid stability and reliability, and when certain criteria are met. This enforcement discretion does not extend to situations in which the licensee may be unable to communicate with the NRC. (The staff assessment of telecommunications capability indicates that a loss of all telecommunications between NRC and licensees is highly unlikely.)

To the extent noncompliance was involved, the NRC staff will normally take enforcement action for the root causes that led to the noncompliance for which enforcement discretion was used. Enforcement action will also be considered in those cases in which incorrect or incomplete information was provided to the NRC staff by a licensee in its justification. The NRC recognizes that a licensee will need to

exercise judgement in making a determination under this discretion provision. Consistent with the NRC's position involving 10 CFR 50.54(x), enforcement action for a violation of a license condition, including a TS, will not be taken unless a licensee's action was clearly unreasonable considering all the relevant circumstances. Enforcement action could include the assessment of civil penalties and the issuance of orders.

Paperwork Reduction Act Statement

This interim policy statement does not contain a new or amended information collection requirement subject to the Paperwork Reduction Act of 1995 (44 U.S.C. 3501 et seq.). Existing requirements were approved by the Office of Management and Budget, approval number 3150-0136.

Public Protection Notification

If a means used to impose an information collection does not display a currently valid OMB control number, the NRC may not conduct or sponsor, and a person is not required to respond to, the information collection.

The NRC is revising the NRC Enforcement Policy by adding Appendix E to read as follows:

General Statement of Policy and Procedure for NRC Enforcement Actions

* * * * *

Appendix E: Interim Enforcement Policy Regarding Enforcement Discretion for Nuclear Power Plants During the Year 2000 Transition

This appendix sets forth the interim enforcement policy that will govern the exercise of enforcement discretion by the NRC staff when licensees of operating nuclear power plants find it necessary to deviate from license conditions, including technical specifications (TSs), in those cases in which year 2000 (Y2K) related complications would otherwise require a plant shutdown that could adversely affect the stability and reliability of the electrical power grid. This policy does not extend to situations in which a licensee may be unable to communicate with the NRC.

The policy is effective August 30, 1999 and will remain in effect through January 1, 2001. This policy only applies during Y2K transition or rollover periods (December 31, 1999, through January 3, 2000; February 28, 2000, through March 1, 2000; and December 30, 2000, through January 1, 2001). During these periods, a licensee may

contact the NRC Headquarters Operations Center and seek NRC enforcement discretion with regard to the potential noncompliance with license conditions, including TSs, if the licensee has determined that:

(a) Complying with license conditions, including TSs, in a Y2K-related situation would require a plant shutdown;

(b) Continued plant operation is needed to help maintain a reliable and stable grid; and

(c) Any decrease in safety as a result of continued plant operation is small (considering both risk and deterministic aspects), and reasonable assurance of public health and safety, the environment, and security is maintained with the enforcement discretion.

Licensees are expected to follow the existing guidance as stated in NRC Inspection Manual Part 9900 for Notices of Enforcement Discretion to the maximum extent practicable, particularly regarding a safety determination and notification of NRC. A licensee seeking NRC enforcement discretion must provide a written justification, or in circumstances in which good cause is shown, an oral justification followed as soon as possible by written justification. The justification must document the need and safety basis for the request and provide whatever other information the NRC staff needs to make a decision regarding whether the exercise of discretion is appropriate. The NRC staff may grant enforcement discretion on the basis of balancing the public health and safety or common defense and security of not operating against potential radiological or other hazards associated with continued operation, and a determination that safety will not be unacceptably affected by exercising the discretion. The Director of the Office of Nuclear Reactor Regulation, or designee, will advise the licensee whether the NRC has approved the licensee's request and, if so, will subsequently confirm the exercise of discretion in writing. Enforcement discretion will only be exercised if the NRC staff is clearly satisfied that the action is consistent with protecting public health and safety and is warranted in the circumstances presented by the licensee.

If the volume of requests to the NRC Headquarters Operations Center is such that the NRC staff cannot review and approve all licensee requests in a timely fashion, the NRC staff will obtain the safety-significant information from the licensee to enable the NRC staff to make a prompt initial assessment. Unless the assessment is unfavorable, the licensee would be permitted to proceed with its planned course of action. The NRC staff will complete these assessments as time permits and the licensee will be advised of the results orally, if possible, and then in writing. If the NRC staff's prompt initial assessment or subsequent assessment determines that a

licensee's actions raise safety concerns, the licensee would be so informed. The licensee would then be required to follow its license conditions, including TSs.

If there are communications difficulties between the licensee and the NRC, the licensee is encouraged to interact with the NRC inspector onsite who will have a dedicated satellite telephone. The inspector should be able to facilitate communication with the NRC Headquarters Operations Center and/or the NRC Regional Incident Response Centers (IRCs). If communication with the NRC Headquarters Operations Center is not possible, then the licensee should contact the IRC in NRC Region IV to discuss enforcement discretion. Similarly, if the Region IV IRC cannot be reached, then the licensee should attempt to contact the Region I, II and III IRCs. Although it is considered highly unlikely, if communication with NRC is not possible, the licensee should follow the plant license conditions, including technical specifications.

In conducting its assessments, the licensee should follow, to the extent practicable, the guidance in NRC Inspection Manual Part 9900 for Notices of Enforcement Discretion.

[[Page 41476]]

Contrary to Part 9900 Section B.3 guidance, it is not necessary for an emergency to be declared by a government entity. Licensees are encouraged to contact NRC early in their evaluation process, particularly if time is of the essence, even though complete information as specified in Part 9900 may not be available.

The decision to exercise enforcement discretion does not change the fact that the licensee will be in noncompliance nor does it imply that enforcement discretion is being exercised for any noncompliance that may have led to the noncompliance at issue. To the extent noncompliance was involved, the NRC staff will normally take enforcement action for the root causes that led to the noncompliance for which enforcement discretion was granted. Enforcement action will also be considered in those cases in which incorrect or incomplete information was provided to the NRC staff by a licensee in its justification. The NRC recognizes that a licensee will need to exercise judgement in making a determination under this discretion provision. Consistent with the NRC's position involving 10 CFR 50.54(x), enforcement action for a violation of a license condition, including a TS, will not be taken unless a licensee's action was clearly unreasonable considering all the relevant circumstances. Enforcement action could include assessment of civil penalties and the issuance of orders.

Dated at Rockville, Maryland, this 26th day of July, 1999.

For the Nuclear Regulatory Commission.

Annette L. Vietti-Cook,

Secretary of the Commission.

[FR Doc. 99-19574 Filed 7-29-99; 8:45 am]

BILLING CODE 7590-01-P

Street NW, Suite 1050, Washington, DC 20004-1107; 202-272-2004 (Voice), 202-272-2074 (TTY), 202-272-2022 (Fax).

AGENCY MISSION: The National Council on Disability is an independent federal agency composed of 15 members appointed by the President of the United States and confirmed by the U.S. Senate. Its overall purpose is to promote policies, programs, practices, and procedures that guarantee equal opportunity for all people with disabilities, regardless of the nature or severity of the disability; and to empower people with disabilities to achieve economic self-sufficiency, independent living, and inclusion and integration into all aspects of society.

ACCOMMODATIONS: Those needing interpreters or other accommodations should notify the National Council on Disability prior to this meeting.

ENVIRONMENTAL ILLNESS: People with environmental illness must reduce their exposure to volatile chemical substances in order to attend this meeting. In order to reduce such exposure, we ask that you not wear perfumes or scents at the meeting. We also ask that you smoke only in designated areas and the privacy of your room. Smoking is prohibited in the meeting room and surrounding area.

OPEN MEETING: This quarterly meeting of the National Council on Disability will be open to the public.

AGENDA: The proposed agenda includes.

Reports from the Chairperson and the Executive Director
Committee Meetings and Committee Reports
Executive Session (closed)
Unfinished Business
New Business
Announcements
Adjournment

Records will be kept of all National Council on Disability proceedings and will be available after the meeting for public inspection at the National Council on Disability.

Signed in Washington, DC, on July 27, 1999.

Ethel D. Briggs,

Executive Director.

[FR Doc. 99-19629 Filed 7-27-99; 4:02 pm]

BILLING CODE 6820-MA-M

NUCLEAR REGULATORY COMMISSION

[NUREG-1600, Revision 1]

Policy and Procedure for NRC Enforcement Actions; Interim Enforcement Policy Regarding Enforcement Discretion for Nuclear Power Plants During the Year 2000 Transition

AGENCY: Nuclear Regulatory Commission.

ACTION: Policy statement; amendment.

SUMMARY: The Nuclear Regulatory Commission (NRC) is amending its "General Statement of Policy and Procedure for NRC Enforcement Actions," NUREG-1600, Revision 1 (Enforcement Policy), by adding Appendix E. This amendment adds an interim enforcement policy that the NRC will follow to exercise enforcement discretion for noncompliance with license conditions, including technical specifications (TSs), because of year 2000 (Y2K) related situations.

DATES: This action is effective August 30, 1999. Comments on this revision should be submitted within 30 days of publication in the **Federal Register** and will be considered by the NRC prior to the next Enforcement Policy revision.

ADDRESSES: Submit written comments to David L. Meyer, Chief, Rules and Directives Branch, Division of Administrative Services, Office of Administration, Mail Stop T-6 D59, U.S. Nuclear Regulatory Commission, Washington, DC 20555-0001. Hand deliver comments to 11555 Rockville Pike, Rockville, Maryland, between 7:30 a.m. and 4:15 p.m., Federal workdays. Copies of comments received may be examined at the NRC Public Document Room, 2120 L Street, NW, (Lower Level), Washington, DC.

FOR FURTHER INFORMATION CONTACT: Richard Wessman, Deputy Director, Division of Engineering, 301-415-3298, or Allen Hansen, Lead Project Manager, Division of Licensing, Project Management, 301-415-1390, Office of Nuclear Reactor Regulation, U.S. Nuclear Regulatory Commission, Washington, D.C. 20555-0001.

SUPPLEMENTARY INFORMATION:

Background

Y2K-related events arise from a date-related problem that is experienced by a software system, a software application, or a digital device at a key rollover date when the system, application, or device does not perform its intended function. The key rollover dates are January 1, 2000; February 29,

2000 (an uncommon leap day); and December 31, 2000 (the 366th day of an uncommon leap year). The nuclear utility industry is engaged in Y2K readiness programs at all nuclear power plant facilities to seek out and correct Y2K-related problems that have any potential to adversely affect facility operations.

Y2K concerns result from licensees' reliance upon:

(1) Software to schedule maintenance and technical specification surveillances;

(2) Programmable logic controllers and other commercial off-the-shelf software and hardware;

(3) Digital process control systems;

(4) Software to support facility operation;

(5) Digital systems for collection of operating data; and

(6) Digital systems to monitor post-accident plant conditions.

It is recognized that in spite of every reasonable effort by licensees to identify and correct Y2K computer system problems at their facilities, some software, applications, equipment, and systems may remain susceptible to the problem. Additionally, software, data, and systems external to the facility could adversely affect the facility (for example, interruption of communications or partial loss of offsite power).

The electricity production and delivery systems, as two of the more important elements of the North American economic and social infrastructure, must remain dependable during Y2K transition or rollover periods. Most other critical elements of the infrastructure depend on the availability of an interconnected, stable, and reliable supply of electrical power. There is no doubt that cascading or even localized outages of generators and transmission facilities could have serious short-term and long-term consequences.

Continued safe operation of nuclear power plants during Y2K transition or rollover periods will play a major role in maintaining stable and reliable electrical power supply systems, providing necessary reserve power if there are major losses at other generating facilities. The NRC staff is issuing interim guidance on the process for the NRC to exercise enforcement discretion in certain situations where power reactor licensees encounter Y2K-associated compliance problems in the Y2K transition period (December 31, 1999, through the first few days of 2000) or in other key rollover periods. The exercise of enforcement discretion may support a licensee decision to keep the

plant in operation, if the licensee has determined that safety will not be unacceptably affected, in order to help maintain electrical grid stability and reliability. The NRC Headquarters Operations Center and the NRC Region IV Incident Response Center will have staff augmented during the key transition from December 31, 1999, to January 1, 2000, to ensure that appropriate actions can be taken for any regulatory issues that arise.

Scope

This interim enforcement policy provides for the exercise of enforcement discretion to address noncompliance with license conditions, including TSs, because of Y2K transition or rollover issues. The interim enforcement policy applies to situations in which plant operation is needed to help maintain the stability and reliability of the electrical power supply system, even when license conditions, including TSs, would require a plant shutdown. If such situations occur, licensees are expected to follow the existing guidance in NRC Inspection Manual Part 9900 for Notices of Enforcement Discretion <<http://www.nrc.gov/NRC/IM/noed.html>> to the maximum extent practicable, particularly regarding a safety determination and notification of NRC. Licensees may decide to continue operations upon making a determination that it is safe and prudent to do so to help maintain electrical grid stability and reliability, and when certain criteria are met. This enforcement discretion does not extend to situations in which the licensee may be unable to communicate with the NRC. (The staff assessment of telecommunications capability indicates that a loss of all telecommunications between NRC and licensees is highly unlikely.)

To the extent noncompliance was involved, the NRC staff will normally take enforcement action for the root causes that led to the noncompliance for which enforcement discretion was used. Enforcement action will also be considered in those cases in which incorrect or incomplete information was provided to the NRC staff by a licensee in its justification. The NRC recognizes that a licensee will need to exercise judgement in making a determination under this discretion provision. Consistent with the NRC's position involving 10 CFR 50.54(x), enforcement action for a violation of a license condition, including a TS, will not be taken unless a licensee's action was clearly unreasonable considering all the relevant circumstances. Enforcement action could include the assessment of

civil penalties and the issuance of orders.

Paperwork Reduction Act Statement

This interim policy statement does not contain a new or amended information collection requirement subject to the Paperwork Reduction Act of 1995 (44 U.S.C. 3501 *et seq.*). Existing requirements were approved by the Office of Management and Budget, approval number 3150-0136.

Public Protection Notification

If a means used to impose an information collection does not display a currently valid OMB control number, the NRC may not conduct or sponsor, and a person is not required to respond to, the information collection.

The NRC is revising the NRC Enforcement Policy by adding Appendix E to read as follows:

General Statement of Policy and Procedure for NRC Enforcement Actions

* * * * *

Appendix E: Interim Enforcement Policy Regarding Enforcement Discretion for Nuclear Power Plants During the Year 2000 Transition

This appendix sets forth the interim enforcement policy that will govern the exercise of enforcement discretion by the NRC staff when licensees of operating nuclear power plants find it necessary to deviate from license conditions, including technical specifications (TSs), in those cases in which year 2000 (Y2K) related complications would otherwise require a plant shutdown that could adversely affect the stability and reliability of the electrical power grid. This policy does not extend to situations in which a licensee may be unable to communicate with the NRC.

The policy is effective August 30, 1999 and will remain in effect through January 1, 2001. This policy only applies during Y2K transition or rollover periods (December 31, 1999, through January 3, 2000; February 28, 2000, through March 1, 2000; and December 30, 2000, through January 1, 2001). During these periods, a licensee may contact the NRC Headquarters Operations Center and seek NRC enforcement discretion with regard to the potential noncompliance with license conditions, including TSs, if the licensee has determined that:

- (a) Complying with license conditions, including TSs, in a Y2K-related situation would require a plant shutdown;
- (b) Continued plant operation is needed to help maintain a reliable and stable grid; and
- (c) Any decrease in safety as a result of continued plant operation is small (considering both risk and deterministic aspects), and reasonable assurance of public health and safety, the environment, and security is maintained with the enforcement discretion.

Licensees are expected to follow the existing guidance as stated in NRC Inspection Manual Part 9900 for Notices of Enforcement

Discretion to the maximum extent practicable, particularly regarding a safety determination and notification of NRC. A licensee seeking NRC enforcement discretion must provide a written justification, or in circumstances in which good cause is shown, an oral justification followed as soon as possible by written justification. The justification must document the need and safety basis for the request and provide whatever other information the NRC staff needs to make a decision regarding whether the exercise of discretion is appropriate. The NRC staff may grant enforcement discretion on the basis of balancing the public health and safety or common defense and security of not operating against potential radiological or other hazards associated with continued operation, and a determination that safety will not be unacceptably affected by exercising the discretion. The Director of the Office of Nuclear Reactor Regulation, or designee, will advise the licensee whether the NRC has approved the licensee's request and, if so, will subsequently confirm the exercise of discretion in writing. Enforcement discretion will only be exercised if the NRC staff is clearly satisfied that the action is consistent with protecting public health and safety and is warranted in the circumstances presented by the licensee.

If the volume of requests to the NRC Headquarters Operations Center is such that the NRC staff cannot review and approve all licensee requests in a timely fashion, the NRC staff will obtain the safety-significant information from the licensee to enable the NRC staff to make a prompt initial assessment. Unless the assessment is unfavorable, the licensee would be permitted to proceed with its planned course of action. The NRC staff will complete these assessments as time permits and the licensee will be advised of the results orally, if possible, and then in writing. If the NRC staff's prompt initial assessment or subsequent assessment determines that a licensee's actions raise safety concerns, the licensee would be so informed. The licensee would then be required to follow its license conditions, including TSs.

If there are communications difficulties between the licensee and the NRC, the licensee is encouraged to interact with the NRC inspector onsite who will have a dedicated satellite telephone. The inspector should be able to facilitate communication with the NRC Headquarters Operations Center and/or the NRC Regional Incident Response Centers (IRCs). If communication with the NRC Headquarters Operations Center is not possible, then the licensee should contact the IRC in NRC Region IV to discuss enforcement discretion. Similarly, if the Region IV IRC cannot be reached, then the licensee should attempt to contact the Region I, II and III IRCs. Although it is considered highly unlikely, if communication with NRC is not possible, the licensee should follow the plant license conditions, including technical specifications.

In conducting its assessments, the licensee should follow, to the extent practicable, the guidance in NRC Inspection Manual Part 9900 for Notices of Enforcement Discretion.

Contrary to Part 9900 Section B.3 guidance, it is not necessary for an emergency to be declared by a government entity. Licensees are encouraged to contact NRC early in their evaluation process, particularly if time is of the essence, even though complete information as specified in Part 9900 may not be available.

The decision to exercise enforcement discretion does not change the fact that the licensee will be in noncompliance nor does it imply that enforcement discretion is being exercised for any noncompliance that may have led to the noncompliance at issue. To the extent noncompliance was involved, the NRC staff will normally take enforcement action for the root causes that led to the noncompliance for which enforcement discretion was granted. Enforcement action will also be considered in those cases in which incorrect or incomplete information was provided to the NRC staff by a licensee in its justification. The NRC recognizes that a licensee will need to exercise judgement in making a determination under this discretion provision. Consistent with the NRC's position involving 10 CFR 50.54(x), enforcement action for a violation of a license condition, including a TS, will not be taken unless a licensee's action was clearly unreasonable considering all the relevant circumstances. Enforcement action could include assessment of civil penalties and the issuance of orders.

Dated at Rockville, Maryland, this 26th day of July, 1999.

For the Nuclear Regulatory Commission,
Annette L. Vietti-Cook,
Secretary of the Commission.

[FR Doc. 99-19574 Filed 7-29-99; 8:45 am]

BILLING CODE 7590-01-P

POSTAL SERVICE

Privacy Act of 1974, System of Records

AGENCY: Postal Service.

ACTION: Notice of new system of records.

SUMMARY: This document publishes notice of a new Privacy Act system of records, USPS 050.070, Finance Records-Funds Transaction/Transfer Reports. The new system contains personal information about the purchaser and/or recipient of money orders, wire transfer, and/or stored value cards purchased in any combination totaling \$3,000 or more during the same visit or multiple visits in 1 business day to the post office.

DATES: Any interested party may submit written comments on the proposed new system of records. This proposal will become effective without further notice on September 8, 1999, unless comments received on or before that date result in a contrary determination.

ADDRESSES: Written comments on this proposal should be mailed or delivered

to Administration and FOIA, United States Postal Service, 475 L'Enfant Plaza SW, Washington, DC 20260-5202.

Copies of all written comments will be available at the above address for public inspection and photocopying between 8 a.m. and 4:45 p.m., Monday through Friday.

FOR FURTHER INFORMATION CONTACT:
Rubenia Carter (202) 268-4872.

SUPPLEMENTARY INFORMATION: The Postal Service will collect and maintain information about some of its customers to meet one of the requirements of the Bank Secrecy Act. That law is designed to detect and deter money laundering. The intent of the law is to require banks and money services businesses to obtain, maintain, and/or report to the Department of Treasury certain identifying information about individuals who purchase financial instruments at a certain dollar threshold. The Postal Service is named as an entity that must comply with that law (31 U.S.C. 5325 and 5330). The Postal Service will maintain information collected from the purchaser when the dollar amount of cash purchases totals \$3,000 or more for money orders, wire transfers, and/or stored value cards. Multiple purchases during 1 business day totaling \$3,000 or more must be treated as one purchase, and information about the purchaser must be obtained if a Postal Service employee knows or has reason to believe that multiple purchases are being made. The Postal Service is establishing this grouping of records as a system of records subject to the Privacy Act.

Maintenance of these records is not expected to have a significant impact on individual privacy rights. Information will be kept in a secured environment, with automated data processing physical and administrative security and technical software applied to information on computer media. Computer and hard copy records are maintained in a secured computer complex, with physical, administrative, and software controls. Access to areas within the complex where these records are maintained is restricted with card keys. Access within the area is further restricted to authorized personnel with an official need.

Pursuant to 5 U.S.C. 552a(e)(11), interested persons are invited to submit written data, views, or arguments on this proposal. A report of the following proposed system has been sent to Congress and to the Office of Management and Budget for their evaluation.

USPS 050.070

SYSTEM NAME:

Finance Records-Funds Transaction/Transfer Reports.

SYSTEM LOCATION:

Finance, Headquarters and St. Louis Accounting Service Center, St. Louis, Missouri.

CATEGORIES OF INDIVIDUALS COVERED BY THE SYSTEM:

Postal Service customers who purchase money orders, wire transfers, and/or stored value cards purchased in any combination totaling \$3,000 or more during the same visit or multiple visits in 1 business day to the post office. Recipients of wire transfers and the beneficiary of funds from money orders totaling \$10,000 or more during the same visit or multiple visits in 1 business day to the post office.

CATEGORIES OF RECORDS IN THE SYSTEM:

Name, address, social security number, date of birth, photo ID, type and amount of transactions, driver's license number (or other type of ID if driver's license is not available, such as Alien Registration Number, Passport Number, Military ID, Tax Identification Number), country code, date of issue, transaction number, place of issue, beginning and ending money order serial numbers, and wire transfer number or other transaction number.

AUTHORITY FOR MAINTENANCE OF THE SYSTEM:

31 U.S.C. 5325 and 5330.

PURPOSE(S):

The information will be used to obtain and maintain identifying information on Postal Service customers who purchase money orders, wire transfers, and/or stored value cards totaling \$3,000 or more.

ROUTINE USES OF RECORDS MAINTAINED IN THE SYSTEM, INCLUDING CATEGORIES OF USERS AND THE PURPOSE OF SUCH USES:

General routine use statements a, b, c, d, e, f, g, h, and j listed in the prefatory statement at the beginning of the Postal Service's published system notices apply to this system. Other routine uses follow:

1. Information may be disclosed to the U.S. Department of Treasury, the U.S. Justice Department, and federal law enforcement agencies pursuant to the provisions of the Federal Bank Secrecy Act, as codified in section 5313 of Title 31 of the U.S. Code.

2. Information from this system may be disclosed to a foreign entity under agreement with the Postal Service to distribute money orders and transfer funds.

[Federal Register: January 25, 1999 (Volume 64, Number 15)]

[Proposed Rules]

[Page 3789-3790]

From the Federal Register Online via GPO Access [wais.access.gpo.gov]

[DOCID:fr25ja99-24]

[[Page 3789]]

Part IV

Nuclear Regulatory Commission

10 CFR Parts 30, 40, et al.

Nuclear Information and Resource Service; Receipt of Petition for
Rulemaking; Proposed Rules

[[Page 3790]]

NUCLEAR REGULATORY COMMISSION

10 CFR Parts 30, 40, 50, and 70

[Docket No. PRM-50-65]

Nuclear Information and Resource Service; Receipt of Petition for Rulemaking

AGENCY: Nuclear Regulatory Commission.

ACTION: Petition for rulemaking; Notice of receipt.

SUMMARY: The Nuclear Regulatory Commission (NRC) has received and requests public comment on a petition for rulemaking filed by the Nuclear Information and Resource Service. The petition has been docketed by the Commission and has been assigned Docket No. PRM-50-65. The petitioner requests that the NRC amend its regulations to require the shutdown of nuclear facilities that are not compliant with date-sensitive, computer-related issues regarding the Year 2000 (Y2K). The petitioner requests that the NRC take this action to ensure that Y2K issues will not cause the failure of nuclear safety systems and thereby pose a threat to public health and safety.

DATES: Submit comments by February **24**, 1999. Comments received after this date will be considered if it is practical to do so, but assurance of consideration cannot be given except as to comments received on or before this date.

ADDRESSES: Submit comments to: Secretary, U.S. Nuclear Regulatory Commission, Washington, DC 20555. Attention: Rulemakings and Adjudications Staff.

Deliver comments to 11555 Rockville Pike, Rockville, Maryland, between 7:30 am and 4:15 pm on Federal workdays.

For a copy of the petition, write: Chief, Rules and Directives Branch, Division of Administrative Services, Office of Administration, U.S. Nuclear Regulatory Commission, Washington, DC 20555-0001.

You may also provide comments via the NRC's interactive rulemaking website through the NRC home page (<http://www.nrc.gov>). This site provides the capability to upload comments as files (any format), if your web browser supports that function. For information about the interactive rulemaking website, contact Ms. Carol Gallagher, (301) 415-5905 (e-mail: CAG@nrc.gov).

FOR FURTHER INFORMATION CONTACT: David L. Meyer, Office of Administration, U.S. Nuclear Regulatory Commission, Washington, DC 20555. Telephone: 301-415-7162 or Toll-Free: 1-800-368-5642 or E-mail: DLM1@NRC.GOV.

SUPPLEMENTARY INFORMATION:

Background

The Nuclear Regulatory Commission received three related petitions for rulemaking, each dated December 10, 1998, submitted by the Nuclear Information Resource Service concerning various aspects of Y2K issues and nuclear safety. This petition requests that the NRC amend its regulations to require that nuclear facilities be shut down if they are not compliant with Y2K issues. The two related petitions would require nuclear power plant and major fuel cycle facilities to develop and implement adequate contingency and emergency plans to address potential system failures (PRM-50-66) and to provide reliable back-up sources of power for nuclear facilities (PRM-50-67).

Because of the nature of these petitions and the date-specific issues they address, the petitioner requests that the petitions be filed expeditiously and that public comment on the actions be limited to 30 days.

The Petitioner's Suggested Amendment

The petitioner requests that the NRC adopt the following text as a rule:

Any and all facilities licensed by the Nuclear Regulatory Commission under 10 CFR Parts 30, 40, 50, and 70 shall be closed by 12 pm Eastern Standard Time, December 1, 1999, unless and until each facility has (a) fully and comprehensively examined all computer systems, embedded chips, and other electronic equipment that may be date-sensitive to ensure that all such systems that may be relevant to safety are Y2K compliant; (b) repaired, modified, and/or replaced all such systems that are not found to be Y2K compliant; (c) made available to the public all information related to the examination and repair, modification and/or replacement of all such systems; (d) determined, through full-scale testing, that all repairs, modifications, and/or replacements of all such systems are, in fact, Y2K compliant.

Discussion

The petitioner notes that in Generic Letter 98-01, the NRC has recognized the potential date-related problems that may affect a system or application (the Y2K problem). These potential problems include not representing the year properly, not recognizing leap years, and improper date calculations. These problems could result in the inability of computer systems to operate or to function properly. The

petitioner states that the Y2K problem could potentially interfere with the proper operation of computer systems, microprocessor-based hardware, and software or databases relied on at nuclear power plants. The petitioner asserts that the Y2K problem could result in a plant trip and subsequent complications in tracking post-shutdown plant status and recovery due to a loss of emergency data collection. The petitioner is also concerned that power grids providing offsite power to nuclear stations could be impacted to the extent that localized and widespread grid failures could occur.

The petitioner acknowledges that the NRC has recognized the potential safety and environmental problems that could result if date-sensitive electronic systems fail to operate or provide false information. The petitioner also notes that NRC has, in Generic Letter 98-01, required its reactor and major fuel cycle facilities to report on their programs to ensure compliance with Y2K issues by July 1, 1999.

However, the petitioner asserts that the NRC has not made explicit how it will define compliance nor what it plans to do for facilities that cannot prove compliance. In the petitioner's suggested regulatory text, the petitioner defines compliance with Y2K issues as evaluation of all potential problems that may be safety-related, repair of all such problems, and full-scale testing of all solutions. The petitioner would also require full public disclosure of all evaluation, repair, and testing data so that it may be examined by independent experts and the public. Finally, the petitioner's suggested amendment would make it clear that nuclear facilities will be closed until they can demonstrate full compliance with Y2K issues.

The petitioner states that the NRC is obligated to act decisively to protect public health and safety and the environment. The petitioner believes that anything short of its suggested approach is insufficient to fulfill this obligation and that the NRC should adopt this suggested regulation as soon as possible.


Dated at Rockville, Maryland, this 15th day of January, 1999.

For the Nuclear Regulatory Commission.

Annette Vietti-Cook,
Secretary of the Commission.

[FR Doc. 99-1592 Filed 1-22-99; 8:45 am]

BILLING CODE 7590-01-P

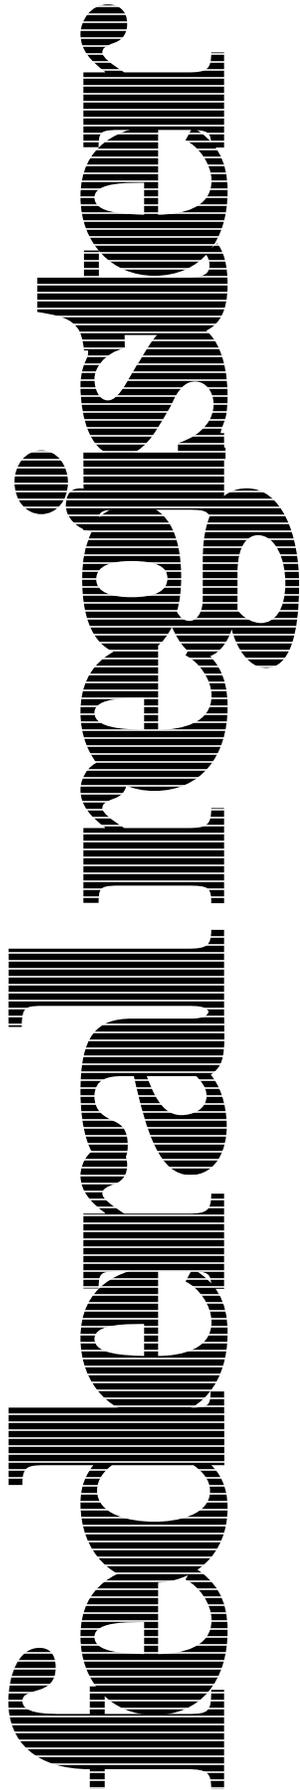

Monday
January 25, 1999

Part IV

**Nuclear Regulatory
Commission**

10 CFR Parts 30, 40, et al.
Nuclear Information and Resource
Service; Receipt of Petition for
Rulemaking; Proposed Rules

NUCLEAR REGULATORY COMMISSION

10 CFR Parts 30, 40, 50, and 70

[Docket No. PRM-50-65]

Nuclear Information and Resource Service; Receipt of Petition for Rulemaking

AGENCY: Nuclear Regulatory Commission.

ACTION: Petition for rulemaking; Notice of receipt.

SUMMARY: The Nuclear Regulatory Commission (NRC) has received and requests public comment on a petition for rulemaking filed by the Nuclear Information and Resource Service. The petition has been docketed by the Commission and has been assigned Docket No. PRM-50-65. The petitioner requests that the NRC amend its regulations to require the shutdown of nuclear facilities that are not compliant with date-sensitive, computer-related issues regarding the Year 2000 (Y2K). The petitioner requests that the NRC take this action to ensure that Y2K issues will not cause the failure of nuclear safety systems and thereby pose a threat to public health and safety.

DATES: Submit comments by February 24, 1999. Comments received after this date will be considered if it is practical to do so, but assurance of consideration cannot be given except as to comments received on or before this date.

ADDRESSES: Submit comments to: Secretary, U.S. Nuclear Regulatory Commission, Washington, DC 20555. Attention: Rulemakings and Adjudications Staff.

Deliver comments to 11555 Rockville Pike, Rockville, Maryland, between 7:30 am and 4:15 pm on Federal workdays.

For a copy of the petition, write: Chief, Rules and Directives Branch, Division of Administrative Services, Office of Administration, U.S. Nuclear Regulatory Commission, Washington, DC 20555-0001.

You may also provide comments via the NRC's interactive rulemaking website through the NRC home page (<http://www.nrc.gov>). This site provides the capability to upload comments as files (any format), if your web browser supports that function. For information about the interactive rulemaking website, contact Ms. Carol Gallagher, (301) 415-5905 (e-mail: CAG@nrc.gov).

FOR FURTHER INFORMATION CONTACT: David L. Meyer, Office of Administration, U.S. Nuclear Regulatory

Commission, Washington, DC 20555. Telephone: 301-415-7162 or Toll-Free: 1-800-368-5642 or E-mail: DLM1@NRC.GOV.

SUPPLEMENTARY INFORMATION:

Background

The Nuclear Regulatory Commission received three related petitions for rulemaking, each dated December 10, 1998, submitted by the Nuclear Information Resource Service concerning various aspects of Y2K issues and nuclear safety. This petition requests that the NRC amend its regulations to require that nuclear facilities be shut down if they are not compliant with Y2K issues. The two related petitions would require nuclear power plant and major fuel cycle facilities to develop and implement adequate contingency and emergency plans to address potential system failures (PRM-50-66) and to provide reliable back-up sources of power for nuclear facilities (PRM-50-67).

Because of the nature of these petitions and the date-specific issues they address, the petitioner requests that the petitions be filed expeditiously and that public comment on the actions be limited to 30 days.

The Petitioner's Suggested Amendment

The petitioner requests that the NRC adopt the following text as a rule:

Any and all facilities licensed by the Nuclear Regulatory Commission under 10 CFR Parts 30, 40, 50, and 70 shall be closed by 12 pm Eastern Standard Time, December 1, 1999, unless and until each facility has (a) fully and comprehensively examined all computer systems, embedded chips, and other electronic equipment that may be date-sensitive to ensure that all such systems that may be relevant to safety are Y2K compliant; (b) repaired, modified, and/or replaced all such systems that are not found to be Y2K compliant; (c) made available to the public all information related to the examination and repair, modification and/or replacement of all such systems; (d) determined, through full-scale testing, that all repairs, modifications, and/or replacements of all such systems are, in fact, Y2K compliant.

Discussion

The petitioner notes that in Generic Letter 98-01, the NRC has recognized the potential date-related problems that may affect a system or application (the Y2K problem). These potential problems include not representing the year properly, not recognizing leap years, and improper date calculations. These problems could result in the inability of computer systems to operate or to function properly. The petitioner states

that the Y2K problem could potentially interfere with the proper operation of computer systems, microprocessor-based hardware, and software or databases relied on at nuclear power plants. The petitioner asserts that the Y2K problem could result in a plant trip and subsequent complications in tracking post-shutdown plant status and recovery due to a loss of emergency data collection. The petitioner is also concerned that power grids providing offsite power to nuclear stations could be impacted to the extent that localized and widespread grid failures could occur.

The petitioner acknowledges that the NRC has recognized the potential safety and environmental problems that could result if date-sensitive electronic systems fail to operate or provide false information. The petitioner also notes that NRC has, in Generic Letter 98-01, required its reactor and major fuel cycle facilities to report on their programs to ensure compliance with Y2K issues by July 1, 1999.

However, the petitioner asserts that the NRC has not made explicit how it will define compliance nor what it plans to do for facilities that cannot prove compliance. In the petitioner's suggested regulatory text, the petitioner defines compliance with Y2K issues as evaluation of all potential problems that may be safety-related, repair of all such problems, and full-scale testing of all solutions. The petitioner would also require full public disclosure of all evaluation, repair, and testing data so that it may be examined by independent experts and the public. Finally, the petitioner's suggested amendment would make it clear that nuclear facilities will be closed until they can demonstrate full compliance with Y2K issues.

The petitioner states that the NRC is obligated to act decisively to protect public health and safety and the environment. The petitioner believes that anything short of its suggested approach is insufficient to fulfill this obligation and that the NRC should adopt this suggested regulation as soon as possible.

Dated at Rockville, Maryland, this 15th day of January, 1999.

For the Nuclear Regulatory Commission.

Annette Vietti-Cook,

Secretary of the Commission.

[FR Doc. 99-1592 Filed 1-22-99; 8:45 am]

BILLING CODE 7590-01-P

[Federal Register: January 25, 1999 (Volume 64, Number 15)]

[Proposed Rules]

[Page 3791]

From the Federal Register Online via GPO Access [wais.access.gpo.gov]

[DOCID:fr25ja99-25]

[[Page 3791]]

NUCLEAR REGULATORY COMMISSION

10 CFR Part 50

[Docket No. PRM-50-66]

Nuclear Information and Resource Service; Receipt of Petition for Rulemaking

AGENCY: Nuclear Regulatory Commission.

ACTION: Petition for rulemaking; Notice of receipt.

SUMMARY: The Nuclear Regulatory Commission (NRC) has received and requests public comment on a petition for rulemaking filed by the Nuclear Information and Resource Service. The petition has been docketed by the Commission and has been assigned Docket No. PRM-50-66. The petitioner requests that the NRC amend its regulations to require every nuclear utility to conduct a full-scale emergency planning exercise that involves coping with a date-sensitive, computer-related failure resulting from a Year 2000 issue (Y2K). The petitioner requests that the NRC take this action to ensure that nuclear power plant licensees have developed and can implement adequate contingency and emergency plans to address major system failures that may be caused by a Y2K problem.

DATES: Submit comments by February 24, 1999. Comments received after this date will be considered if it is practical to do so, but assurance of consideration cannot be given except as to comments received on or before this date.

ADDRESSES: Submit comments to: Secretary, U.S. Nuclear Regulatory Commission, Washington, DC 20555. Attention: Rulemakings and Adjudications Staff.

Deliver comments to 11555 Rockville Pike, Rockville, Maryland, between 7:30 am and 4:15 pm on Federal workdays.

For a copy of the petition, write: Chief, Rules and Directives Branch, Division of Administrative Services, Office of Administration, U.S. Nuclear Regulatory Commission, Washington, DC 20555-0001.

You may also provide comments via the NRC's interactive rulemaking website through the NRC home page (<http://www.nrc.gov>). This site provides the capability to upload comments as files (any format), if your web browser supports that function. For information about the interactive rulemaking website, contact Ms. Carol Gallagher, (301) 415-5905 (e-mail: CAG@nrc.gov).

FOR FURTHER INFORMATION CONTACT: David L. Meyer, Office of Administration, U.S. Nuclear Regulatory Commission, Washington, DC 20555. Telephone: 301-415-7162 or Toll-Free: 1-800-368-5642 or E-mail: DLM1@NRC.GOV.

SUPPLEMENTARY INFORMATION:

Background

The Nuclear Regulatory Commission received three related petitions for rulemaking, each dated December 10, 1998, submitted by the Nuclear Information Resource Service concerning various aspects of Y2K issues and nuclear safety. This petition requests that the NRC amend its regulations to require nuclear power plant and major fuel cycle facilities to develop and implement adequate contingency and emergency plans to address potential system failures. The two related petitions would require that nuclear facilities be shut down if they are not compliant with Y2K issues (PRM-50-65) and that nuclear facilities provide reliable back-up sources of power for nuclear facilities (PRM-50-67).

Because of the nature of these petitions and the date-specific issues they address, the petitioner requests that the petitions be filed expeditiously and that public comment on the actions be limited to 30 days.

The Petitioner's Suggested Amendment

The petitioner requests that the NRC adopt the following text as a rule:

All licensees subject to 10 CFR Part 50 and Appendix E will

conduct a full-scale emergency planning exercise (as normally required under 10 CFR 50.47) during 1999. This exercise shall include a component that includes failure of one or more computer or other digital systems (this is popularly known as the ``Y2K bug'') on January 1, 2000, or other relevant date. Licensees that do not conduct, or that fail, this exercise shall close their facilities licensed under this part by December 1, 1999, until such time as the licensees have conducted a successful exercise.

The NRC shall publish and provide to each licensee, within 30 days of the date of this rule, a Regulatory Guide that outlines potential emergency exercise scenarios. The NRC shall publish and provide to each licensee, by December 1, 1999, a Regulatory Guide that describes the various scenarios that have been undertaken and the successful (and unsuccessful) responses to the problem posed.

Discussion

The petitioner states that although the probability of Y2K-related events occurring that would require emergency response and the implementation of contingency plans is unknown, it would fall within the range of safety matters for which NRC requires emergency planning exercises. Furthermore, the petitioner asserts that addressing Y2K-related problems will require the use of potentially unfamiliar contingency plans, relying on ingenuity to circumvent failure of essential communications systems or the failure of off-site emergency responders to perform their tasks effectively, and coping with issues not normally tested during emergency exercises.

The petitioner believes that it is prudent to require each licensee to conduct an exercise and that each exercise address a different aspect of the Y2K problem. The petitioner suggests that some exercises should test problems initiated by Y2K-related failures and that others should test problems exacerbated by Y2K-related failures. The petitioner believes that this would provide some familiarity with the possible range of issues that could develop and create an overall industry capability to address potential Y2K problems.

Under the petitioner's suggested regulation, the licensees would develop exercise scenarios that would be approved by the NRC in an expedited fashion and the NRC would publish and distribute regulatory guides that would outline potential emergency response scenarios and describe the scenarios that were tested and the successful responses to the problem posed.

The petitioner believes that this action would provide reasonable assurance that nuclear power plant licensees have developed and can implement adequate contingency and emergency plans to address major system failures that may be caused by the Y2K problem.

The petitioner also believes that other major fuel cycle facilities

should be subject to a similar rule.

Dated at Rockville, Maryland, this 15th day of January, 1999.

For the Nuclear Regulatory Commission.

Annette Vietti-Cook,

Secretary of the Commission.

[FR Doc. 99-1593 Filed 1-22-99; 8:45 am]

BILLING CODE 7590-01-P

NUCLEAR REGULATORY COMMISSION**10 CFR Part 50**

[Docket No. PRM-50-66]

Nuclear Information and Resource Service; Receipt of Petition for Rulemaking**AGENCY:** Nuclear Regulatory Commission.**ACTION:** Petition for rulemaking; Notice of receipt.

SUMMARY: The Nuclear Regulatory Commission (NRC) has received and requests public comment on a petition for rulemaking filed by the Nuclear Information and Resource Service. The petition has been docketed by the Commission and has been assigned Docket No. PRM-50-66. The petitioner requests that the NRC amend its regulations to require every nuclear utility to conduct a full-scale emergency planning exercise that involves coping with a date-sensitive, computer-related failure resulting from a Year 2000 issue (Y2K). The petitioner requests that the NRC take this action to ensure that nuclear power plant licensees have developed and can implement adequate contingency and emergency plans to address major system failures that may be caused by a Y2K problem.

DATES: Submit comments by February 24, 1999. Comments received after this date will be considered if it is practical to do so, but assurance of consideration cannot be given except as to comments received on or before this date.

ADDRESSES: Submit comments to: Secretary, U.S. Nuclear Regulatory Commission, Washington, DC 20555. Attention: Rulemakings and Adjudications Staff.

Deliver comments to 11555 Rockville Pike, Rockville, Maryland, between 7:30 am and 4:15 pm on Federal workdays.

For a copy of the petition, write: Chief, Rules and Directives Branch, Division of Administrative Services, Office of Administration, U.S. Nuclear Regulatory Commission, Washington, DC 20555-0001.

You may also provide comments via the NRC's interactive rulemaking website through the NRC home page (<http://www.nrc.gov>). This site provides the capability to upload comments as files (any format), if your web browser supports that function. For information about the interactive rulemaking website, contact Ms. Carol Gallagher, (301) 415-5905 (e-mail: CAG@nrc.gov).

FOR FURTHER INFORMATION CONTACT: David L. Meyer, Office of

Administration, U.S. Nuclear Regulatory Commission, Washington, DC 20555. Telephone: 301-415-7162 or Toll-Free: 1-800-368-5642 or E-mail: DLM1@NRC.GOV.

SUPPLEMENTARY INFORMATION:**Background**

The Nuclear Regulatory Commission received three related petitions for rulemaking, each dated December 10, 1998, submitted by the Nuclear Information Resource Service concerning various aspects of Y2K issues and nuclear safety. This petition requests that the NRC amend its regulations to require nuclear power plant and major fuel cycle facilities to develop and implement adequate contingency and emergency plans to address potential system failures. The two related petitions would require that nuclear facilities be shut down if they are not compliant with Y2K issues (PRM-50-65) and that nuclear facilities provide reliable back-up sources of power for nuclear facilities (PRM-50-67).

Because of the nature of these petitions and the date-specific issues they address, the petitioner requests that the petitions be filed expeditiously and that public comment on the actions be limited to 30 days.

The Petitioner's Suggested Amendment

The petitioner requests that the NRC adopt the following text as a rule:

All licensees subject to 10 CFR Part 50 and Appendix E will conduct a full-scale emergency planning exercise (as normally required under 10 CFR 50.47) during 1999. This exercise shall include a component that includes failure of one or more computer or other digital systems (this is popularly known as the "Y2K bug") on January 1, 2000, or other relevant date. Licensees that do not conduct, or that fail, this exercise shall close their facilities licensed under this part by December 1, 1999, until such time as the licensees have conducted a successful exercise.

The NRC shall publish and provide to each licensee, within 30 days of the date of this rule, a Regulatory Guide that outlines potential emergency exercise scenarios. The NRC shall publish and provide to each licensee, by December 1, 1999, a Regulatory Guide that describes the various scenarios that have been undertaken and the successful (and unsuccessful) responses to the problem posed.

Discussion

The petitioner states that although the probability of Y2K-related events occurring that would require emergency response and the implementation of contingency plans is unknown, it would fall within the range of safety matters for which NRC requires emergency

planning exercises. Furthermore, the petitioner asserts that addressing Y2K-related problems will require the use of potentially unfamiliar contingency plans, relying on ingenuity to circumvent failure of essential communications systems or the failure of off-site emergency responders to perform their tasks effectively, and coping with issues not normally tested during emergency exercises.

The petitioner believes that it is prudent to require each licensee to conduct an exercise and that each exercise address a different aspect of the Y2K problem. The petitioner suggests that some exercises should test problems initiated by Y2K-related failures and that others should test problems exacerbated by Y2K-related failures. The petitioner believes that this would provide some familiarity with the possible range of issues that could develop and create an overall industry capability to address potential Y2K problems.

Under the petitioner's suggested regulation, the licensees would develop exercise scenarios that would be approved by the NRC in an expedited fashion and the NRC would publish and distribute regulatory guides that would outline potential emergency response scenarios and describe the scenarios that were tested and the successful responses to the problem posed.

The petitioner believes that this action would provide reasonable assurance that nuclear power plant licensees have developed and can implement adequate contingency and emergency plans to address major system failures that may be caused by the Y2K problem.

The petitioner also believes that other major fuel cycle facilities should be subject to a similar rule.

Dated at Rockville, Maryland, this 15th day of January, 1999.

For the Nuclear Regulatory Commission.

Annette Vietti-Cook,

Secretary of the Commission.

[FR Doc. 99-1593 Filed 1-22-99; 8:45 am]

BILLING CODE 7590-01-P

NUCLEAR REGULATORY COMMISSION**10 CFR Parts 50 and 70**

[Docket No. PRM-50-67]

Nuclear Information and Resource Service; Receipt of Petition for Rulemaking**AGENCY:** Nuclear Regulatory Commission.

[Federal Register: January 25, 1999 (Volume 64, Number 15)]

[Proposed Rules]

[Page 3791-3793]

From the Federal Register Online via GPO Access [wais.access.gpo.gov]

[DOCID: **fr25ja99-26**]

NUCLEAR REGULATORY COMMISSION

10 CFR Parts 50 and 70

[Docket No. PRM-50-67]

Nuclear Information and Resource Service; Receipt of Petition for Rulemaking

AGENCY: Nuclear Regulatory Commission.

[[Page 3792]]

ACTION: Petition for rulemaking; Notice of receipt.

SUMMARY: The Nuclear Regulatory Commission (NRC) has received and requests public comment on a petition for rulemaking filed by the Nuclear Information and Resource Service. The petition has been docketed by the Commission and has been assigned Docket No. PRM-50-67. The petitioner requests that the NRC amend its regulations to require that nuclear facilities ensure the availability of electricity to power atomic reactor and other nuclear facility safety systems in the event of a date-sensitive, computer-related incident resulting from a Year 2000 issue (Y2K). The petitioner requests that the NRC take this action to ensure that reliable back-up sources of power are available in the event of a Y2K incident.

DATES: Submit comments by February 24, 1999. Comments received after this date will be considered if it is practical to do so, but assurance of consideration cannot be given except as to comments received on or before this date.

ADDRESSES: Submit comments to: Secretary, U.S. Nuclear Regulatory Commission, Washington, DC 20555. Attention: Rulemakings and Adjudications Staff.

Deliver comments to 11555 Rockville Pike, Rockville, Maryland, between 7:30 am and 4:15 pm on Federal workdays.

For a copy of the petition, write: Chief, Rules and Directives Branch, Division of Administrative Services, Office of Administration, U.S. Nuclear Regulatory Commission, Washington, DC 20555-0001.

You may also provide comments via the NRC's interactive rulemaking website through the NRC home page (<http://www.nrc.gov>). This site provides the capability to upload comments as files (any format), if your web browser supports that function. For information about the interactive rulemaking website, contact Ms. Carol Gallagher, (301) 415-5905 (e-mail: CAG@nrc.gov).

FOR FURTHER INFORMATION CONTACT: David L. Meyer, Office of Administration, U.S. Nuclear Regulatory Commission, Washington, DC 20555. Telephone: 301-415-7162 or Toll-Free: 1-800-368-5642 or E-mail: DLM1@NRC.GOV.

SUPPLEMENTARY INFORMATION:

Background

The Nuclear Regulatory Commission received three related petitions for rulemaking, each dated December 10, 1998, submitted by the Nuclear Information Resource Service concerning various aspects of Y2K issues and nuclear safety. This petition requests that the NRC amend its regulations to provide reliable back-up sources of power for nuclear facilities. The two related petitions would require that nuclear power plant and major fuel cycle facilities be shutdown if they are not compliant with Y2K issues (PRM-50-65) and require that nuclear facilities develop and implement adequate contingency and emergency plans to address potential system failures (PRM-50-66).

Because of the nature of these petitions and the date-specific issues they address, the petitioner requests that the petitions be filed expeditiously and that public comment on the actions be limited to 30 days.

The Petitioner's Suggested Amendment

The petitioner requests that the NRC adopt the following text as a rule:

The Nuclear Regulatory Commission recognizes that date-sensitive computer programs, embedded chips, and other electronic systems that

perform a major role in distributing, allocating, and ensuring electric power throughout the United States may be prone to failure beginning on January 1, 2000. Loss of all alternating current electricity from both the offsite power grid and onsite emergency generators (commonly known as ``station blackout,') long has been identified by the NRC as among the most prominent contributors to risk for atomic reactors.

(1) For these reasons, the NRC requires of Part 50 and 70 licensees as of December 1, 1999: (a) that all emergency diesel generators that provide back-up power to nuclear licensees must be operational and remain operational; (b) that licensees that cannot demonstrate full operational capabilities of all emergency diesel generators must close until such time that full operational capabilities of emergency diesel generators are attained; (c) that all licensees must have a 60-day supply of fuel for emergency diesel generators.

(2) Further, to ensure adequate protection of public health and safety, the NRC requires that all licensees under these sections must provide alternate means of back-up power sufficient to ensure safety. These may include, but are not limited to: solar power panels, wind turbines, hydroelectric power, biomass power, and other means of generating electricity. These additional back-up systems must provide electricity directly to the licensee rather than to the broader electrical grid.

(3) Irradiated fuel pools are to be immediately classified as Class 1-E; back-up power systems must be sufficient to provide cooling for such pools.

Licensees which cannot demonstrate compliance with sections (1) and (2) must cease operations as of December 1, 1999, until compliance with these sections is attained.

Discussion

The petitioner acknowledges that the NRC has recognized the potential safety and environmental problems that could result if date-sensitive electronic systems fail to operate or provide false information. The petitioner also notes that NRC has required its reactor and major fuel cycle facilities to report on their programs to ensure compliance with Y2K issues by July 1, 1999.

The petitioner is addressing a related problem concerning the availability of electricity to power atomic reactor and other safety systems. Electricity is required to operate atomic reactor safety and cooling systems. This electricity is provided by offsite sources, referred to by the petitioner as the overall electrical grid. The petitioner states that the NRC has long recognized that the loss of all alternating current from both onsite and offsite systems, known

generally as ``station blackout'', is the most important contributor to risk at most atomic reactors. The petitioner notes that the NRC has required licensees to have back-up sources of onsite emergency power, normally multiple emergency diesel generators, capable of supplying the electricity necessary to operate essential safety systems.

The petitioner asserts that the emergency diesel generators used at atomic reactors have proven unreliable and are often out of service. The petitioner asserts that the unprecedented condition posed by the Y2K problem, coupled with the demonstrated and ongoing failures of emergency diesel generators, constitutes reasonable doubt that emergency fuel generators can be relied on. Therefore, the petitioner believes that the NRC should require all emergency diesel generators be operational, have a 60-day supply of fuel as of December 1, 1999, and that licensed facilities that cannot meet these requirements be closed.

The petitioner discusses the likelihood and potential consequences of a failure of all or a portion of the electric power grid in the United States. The petitioner recognizes that the failure of all or a portion of the electrical grid due to Y2K issues is well beyond the scope of NRC's authority. However, the petitioner states that the extended failure of all or a portion of the electrical grid would place severe stress on the current emergency diesel generator system of back-up power supply and that the failure of emergency diesel generators at one or more reactor sites could result in extended station blackouts and nuclear catastrophes. The petitioner asserts that this possibility is well within the range of probabilities for

[[Page 3793]]

which the NRC routinely requires action by its licensees. The petitioner further asserts that reliance on unreliable emergency diesel generators is insufficient under these conditions.

Therefore, the petitioner believes it is essential that the NRC take the type of regulatory action suggested in this petition on an expedited basis.

Dated at Rockville, Maryland, this 15th day of January, 1999.

For the Nuclear Regulatory Commission.

Annette Vietti-Cook,
Secretary of the Commission.

[FR Doc. 99-1594 Filed 1-22-99; 8:45 am]

BILLING CODE 7590-01-P

NUCLEAR REGULATORY COMMISSION**10 CFR Part 50**

[Docket No. PRM-50-66]

Nuclear Information and Resource Service; Receipt of Petition for Rulemaking

AGENCY: Nuclear Regulatory Commission.

ACTION: Petition for rulemaking; Notice of receipt.

SUMMARY: The Nuclear Regulatory Commission (NRC) has received and requests public comment on a petition for rulemaking filed by the Nuclear Information and Resource Service. The petition has been docketed by the Commission and has been assigned Docket No. PRM-50-66. The petitioner requests that the NRC amend its regulations to require every nuclear utility to conduct a full-scale emergency planning exercise that involves coping with a date-sensitive, computer-related failure resulting from a Year 2000 issue (Y2K). The petitioner requests that the NRC take this action to ensure that nuclear power plant licensees have developed and can implement adequate contingency and emergency plans to address major system failures that may be caused by a Y2K problem.

DATES: Submit comments by February 24, 1999. Comments received after this date will be considered if it is practical to do so, but assurance of consideration cannot be given except as to comments received on or before this date.

ADDRESSES: Submit comments to: Secretary, U.S. Nuclear Regulatory Commission, Washington, DC 20555. Attention: Rulemakings and Adjudications Staff.

Deliver comments to 11555 Rockville Pike, Rockville, Maryland, between 7:30 am and 4:15 pm on Federal workdays.

For a copy of the petition, write: Chief, Rules and Directives Branch, Division of Administrative Services, Office of Administration, U.S. Nuclear Regulatory Commission, Washington, DC 20555-0001.

You may also provide comments via the NRC's interactive rulemaking website through the NRC home page (<http://www.nrc.gov>). This site provides the capability to upload comments as files (any format), if your web browser supports that function. For information about the interactive rulemaking website, contact Ms. Carol Gallagher, (301) 415-5905 (e-mail: CAG@nrc.gov).

FOR FURTHER INFORMATION CONTACT: David L. Meyer, Office of

Administration, U.S. Nuclear Regulatory Commission, Washington, DC 20555. Telephone: 301-415-7162 or Toll-Free: 1-800-368-5642 or E-mail: DLM1@NRC.GOV.

SUPPLEMENTARY INFORMATION:**Background**

The Nuclear Regulatory Commission received three related petitions for rulemaking, each dated December 10, 1998, submitted by the Nuclear Information Resource Service concerning various aspects of Y2K issues and nuclear safety. This petition requests that the NRC amend its regulations to require nuclear power plant and major fuel cycle facilities to develop and implement adequate contingency and emergency plans to address potential system failures. The two related petitions would require that nuclear facilities be shut down if they are not compliant with Y2K issues (PRM-50-65) and that nuclear facilities provide reliable back-up sources of power for nuclear facilities (PRM-50-67).

Because of the nature of these petitions and the date-specific issues they address, the petitioner requests that the petitions be filed expeditiously and that public comment on the actions be limited to 30 days.

The Petitioner's Suggested Amendment

The petitioner requests that the NRC adopt the following text as a rule:

All licensees subject to 10 CFR Part 50 and Appendix E will conduct a full-scale emergency planning exercise (as normally required under 10 CFR 50.47) during 1999. This exercise shall include a component that includes failure of one or more computer or other digital systems (this is popularly known as the "Y2K bug") on January 1, 2000, or other relevant date. Licensees that do not conduct, or that fail, this exercise shall close their facilities licensed under this part by December 1, 1999, until such time as the licensees have conducted a successful exercise.

The NRC shall publish and provide to each licensee, within 30 days of the date of this rule, a Regulatory Guide that outlines potential emergency exercise scenarios. The NRC shall publish and provide to each licensee, by December 1, 1999, a Regulatory Guide that describes the various scenarios that have been undertaken and the successful (and unsuccessful) responses to the problem posed.

Discussion

The petitioner states that although the probability of Y2K-related events occurring that would require emergency response and the implementation of contingency plans is unknown, it would fall within the range of safety matters for which NRC requires emergency

planning exercises. Furthermore, the petitioner asserts that addressing Y2K-related problems will require the use of potentially unfamiliar contingency plans, relying on ingenuity to circumvent failure of essential communications systems or the failure of off-site emergency responders to perform their tasks effectively, and coping with issues not normally tested during emergency exercises.

The petitioner believes that it is prudent to require each licensee to conduct an exercise and that each exercise address a different aspect of the Y2K problem. The petitioner suggests that some exercises should test problems initiated by Y2K-related failures and that others should test problems exacerbated by Y2K-related failures. The petitioner believes that this would provide some familiarity with the possible range of issues that could develop and create an overall industry capability to address potential Y2K problems.

Under the petitioner's suggested regulation, the licensees would develop exercise scenarios that would be approved by the NRC in an expedited fashion and the NRC would publish and distribute regulatory guides that would outline potential emergency response scenarios and describe the scenarios that were tested and the successful responses to the problem posed.

The petitioner believes that this action would provide reasonable assurance that nuclear power plant licensees have developed and can implement adequate contingency and emergency plans to address major system failures that may be caused by the Y2K problem.

The petitioner also believes that other major fuel cycle facilities should be subject to a similar rule.

Dated at Rockville, Maryland, this 15th day of January, 1999.

For the Nuclear Regulatory Commission.

Annette Vietti-Cook,

Secretary of the Commission.

[FR Doc. 99-1593 Filed 1-22-99; 8:45 am]

BILLING CODE 7590-01-P

NUCLEAR REGULATORY COMMISSION**10 CFR Parts 50 and 70**

[Docket No. PRM-50-67]

Nuclear Information and Resource Service; Receipt of Petition for Rulemaking

AGENCY: Nuclear Regulatory Commission.

ACTION: Petition for rulemaking; Notice of receipt.

SUMMARY: The Nuclear Regulatory Commission (NRC) has received and requests public comment on a petition for rulemaking filed by the Nuclear Information and Resource Service. The petition has been docketed by the Commission and has been assigned Docket No. PRM-50-67. The petitioner requests that the NRC amend its regulations to require that nuclear facilities ensure the availability of electricity to power atomic reactor and other nuclear facility safety systems in the event of a date-sensitive, computer-related incident resulting from a Year 2000 issue (Y2K). The petitioner requests that the NRC take this action to ensure that reliable back-up sources of power are available in the event of a Y2K incident.

DATES: Submit comments by February 24, 1999. Comments received after this date will be considered if it is practical to do so, but assurance of consideration cannot be given except as to comments received on or before this date.

ADDRESSES: Submit comments to: Secretary, U.S. Nuclear Regulatory Commission, Washington, DC 20555. Attention: Rulemakings and Adjudications Staff.

Deliver comments to 11555 Rockville Pike, Rockville, Maryland, between 7:30 am and 4:15 pm on Federal workdays.

For a copy of the petition, write: Chief, Rules and Directives Branch, Division of Administrative Services, Office of Administration, U.S. Nuclear Regulatory Commission, Washington, DC 20555-0001.

You may also provide comments via the NRC's interactive rulemaking website through the NRC home page (<http://www.nrc.gov>). This site provides the capability to upload comments as files (any format), if your web browser supports that function. For information about the interactive rulemaking website, contact Ms. Carol Gallagher, (301) 415-5905 (e-mail: CAG@nrc.gov).

FOR FURTHER INFORMATION CONTACT: David L. Meyer, Office of Administration, U.S. Nuclear Regulatory Commission, Washington, DC 20555. Telephone: 301-415-7162 or Toll-Free: 1-800-368-5642 or E-mail: DLM1@NRC.GOV.

SUPPLEMENTARY INFORMATION:

Background

The Nuclear Regulatory Commission received three related petitions for rulemaking, each dated December 10, 1998, submitted by the Nuclear Information Resource Service

concerning various aspects of Y2K issues and nuclear safety. This petition requests that the NRC amend its regulations to provide reliable back-up sources of power for nuclear facilities. The two related petitions would require that nuclear power plant and major fuel cycle facilities be shutdown if they are not compliant with Y2K issues (PRM-50-65) and require that nuclear facilities develop and implement adequate contingency and emergency plans to address potential system failures (PRM-50-66).

Because of the nature of these petitions and the date-specific issues they address, the petitioner requests that the petitions be filed expeditiously and that public comment on the actions be limited to 30 days.

The Petitioner's Suggested Amendment

The petitioner requests that the NRC adopt the following text as a rule:

The Nuclear Regulatory Commission recognizes that date-sensitive computer programs, embedded chips, and other electronic systems that perform a major role in distributing, allocating, and ensuring electric power throughout the United States may be prone to failure beginning on January 1, 2000. Loss of all alternating current electricity from both the offsite power grid and onsite emergency generators (commonly known as "station blackout,") long has been identified by the NRC as among the most prominent contributors to risk for atomic reactors.

(1) For these reasons, the NRC requires of Part 50 and 70 licensees as of December 1, 1999: (a) that all emergency diesel generators that provide back-up power to nuclear licensees must be operational and remain operational; (b) that licensees that cannot demonstrate full operational capabilities of all emergency diesel generators must close until such time that full operational capabilities of emergency diesel generators are attained; (c) that all licensees must have a 60-day supply of fuel for emergency diesel generators.

(2) Further, to ensure adequate protection of public health and safety, the NRC requires that all licensees under these sections must provide alternate means of back-up power sufficient to ensure safety. These may include, but are not limited to: solar power panels, wind turbines, hydroelectric power, biomass power, and other means of generating electricity. These additional back-up systems must provide electricity directly to the licensee rather than to the broader electrical grid.

(3) Irradiated fuel pools are to be immediately classified as Class 1-E; back-up power systems must be sufficient to provide cooling for such pools.

Licensees which cannot demonstrate compliance with sections (1) and (2) must cease operations as of December 1, 1999, until compliance with these sections is attained.

Discussion

The petitioner acknowledges that the NRC has recognized the potential safety and environmental problems that could result if date-sensitive electronic systems fail to operate or provide false information. The petitioner also notes that NRC has required its reactor and major fuel cycle facilities to report on their programs to ensure compliance with Y2K issues by July 1, 1999.

The petitioner is addressing a related problem concerning the availability of electricity to power atomic reactor and other safety systems. Electricity is required to operate atomic reactor safety and cooling systems. This electricity is provided by offsite sources, referred to by the petitioner as the overall electrical grid. The petitioner states that the NRC has long recognized that the loss of all alternating current from both onsite and offsite systems, known generally as "station blackout", is the most important contributor to risk at most atomic reactors. The petitioner notes that the NRC has required licensees to have back-up sources of onsite emergency power, normally multiple emergency diesel generators, capable of supplying the electricity necessary to operate essential safety systems.

The petitioner asserts that the emergency diesel generators used at atomic reactors have proven unreliable and are often out of service. The petitioner asserts that the unprecedented condition posed by the Y2K problem, coupled with the demonstrated and ongoing failures of emergency diesel generators, constitutes reasonable doubt that emergency fuel generators can be relied on. Therefore, the petitioner believes that the NRC should require all emergency diesel generators be operational, have a 60-day supply of fuel as of December 1, 1999, and that licensed facilities that cannot meet these requirements be closed.

The petitioner discusses the likelihood and potential consequences of a failure of all or a portion of the electric power grid in the United States. The petitioner recognizes that the failure of all or a portion of the electrical grid due to Y2K issues is well beyond the scope of NRC's authority. However, the petitioner states that the extended failure of all or a portion of the electrical grid would place severe stress on the current emergency diesel generator system of back-up power supply and that the failure of emergency diesel generators at one or more reactor sites could result in extended station blackouts and nuclear catastrophes. The petitioner asserts that this possibility is well within the range of probabilities for

which the NRC routinely requires action by its licensees. The petitioner further asserts that reliance on unreliable emergency diesel generators is insufficient under these conditions.

Therefore, the petitioner believes it is essential that the NRC take the type of regulatory action suggested in this petition on an expedited basis.

Dated at Rockville, Maryland, this 15th day of January, 1999.

For the Nuclear Regulatory Commission.

Annette Vietti-Cook,

Secretary of the Commission.

[FR Doc. 99-1594 Filed 1-22-99; 8:45 am]

BILLING CODE 7590-01-P

[Federal Register: January 20, 1999 (Volume 64, Number 12)]

[Notices]

[Page 3139-3140]

From the Federal Register Online via GPO Access [wais.access.gpo.gov]

[DOCID:fr20ja99-98]

NUCLEAR REGULATORY COMMISSION

Contingency Plan for the Year 2000 Issue in the Nuclear Industry

AGENCY: Nuclear Regulatory Commission.

ACTION: Notice of availability and request for comments.

SUMMARY: The U.S. Nuclear Regulatory Commission (NRC) is making available a draft document entitled, ``Contingency Plan for the Year 2000 Issue in the Nuclear Industry.'' This document describes the current plan and approach the NRC staff expects to use in addressing contingencies resulting from potential unanticipated events due to the Year 2000 (Y2K) problem. The NRC staff believes prudent contingency planning for the Y2K problem is appropriate in addition to actions being taken by NRC licensees to achieve Y2K readiness of their facilities. The staff further recognizes the importance of a broader focus that will help to ensure that Y2K concerns regarding the national infrastructure are identified and resolved.

DATES: Public input is solicited on the overall scope and direction of the NRC Contingency Plan. To be most helpful, comments should be received no later than February 15, 1999. Comments received after this date may be considered in the further development of the Contingency Plan if practical to do so.

ADDRESSES: A copy of the draft Contingency Plan can be obtained via the World Wide Web at <http://www.nrc.gov/NRC/Y2K/Y2KCP.html> or from the NRC's Public Document Room, 2120 L Street, NW. (Lower Level), Washington, DC 20555; telephone 202-634-3273; fax 202-634-3343.

Mail Comments to: Chief, Rules and Directives Branch, Division of Administrative Services, Mail Stop T-6D59, U. S. Nuclear Regulatory Commission, Washington, DC 20555-0001 or fax to 301-415-5144. Comments may be hand-delivered to 11545 Rockville Pike, Rockville, Maryland

between 7:45 a.m. and 4:15 p.m. on Federal workdays.

FOR FURTHER INFORMATION CONTACT: Joseph G. Giitter; Mail Stop T-4A43, Office for Evaluation and Analysis of Operational Data, Nuclear Regulatory Commission, Washington, DC 20555-0001; telephone 301-415-7485; E-mail JGG@NRC.GOV.

SUPPLEMENTARY INFORMATION: The NRC is working with its licensees to ensure that their potential Year 2000 (Y2K) issues have been identified and corrected, and that the agency's own computer-based systems will continue to function properly during the transition from 1999 into 2000.

Nuclear power plant licensees indicate no significant Year 2000 problems with computer systems

[[Page 3140]]

required for safe operation or shutdown of plants, since most are controlled by analog equipment that does not use computers. However, other non-safety computer systems used in such areas as control room displays, radiation monitoring and security functions may have potential problems. For this reason, and to be able to respond to potential unanticipated Y2K problems, the NRC is developing a contingency plan for ensuring that public health and safety and the environment will continue to be protected.

The Contingency Plan for the Year 2000 Issue, built around a reasonably conservative planning scenario, would establish NRC expectations for staff coordination with external stakeholders and staff actions to be taken during the transition period.

The staff considers the NRC Year 2000 Contingency Plan to be a rapidly evolving product, subject to anticipated but very necessary coordination efforts with other Federal agencies and with NRC licensees. In its current form, the plan discusses actions and approaches involving potential policy issues that may require more formal Commission review and approval. However, the Commission has determined that the plan should be made available to the public at this time in order to promote communication and dialogue regarding the proposals discussed therein.

Dated at Rockville, Maryland, this 13th day of January, 1999.

For the Nuclear Regulatory Commission.

Frank J. Congel,
Director, Incident Response.

[FR Doc. 99-1199 Filed 1-19-99; 8:45 am]

BILLING CODE 7590-01-P

DG-1074 guidance and the industry NEI 97-06 approach. As a result of these technical interactions, the staff is already familiar with industry's comments regarding the DG-1074 guidance. In order to minimize expenditure of additional industry resources for commenting on the DG-1074 guidance, the staff intends to consider as comments the information that the industry has provided in prior public meetings on this subject and suggests that industry reference previous interactions and submittals wherever possible as providing its comments. However, to date the public has not had an opportunity to comment on the DG-1074 guidance. Accordingly, this **Federal Register** announcement provides an opportunity for the public, as a whole, to provide comments on the DG-1074 guidance. The staff will consider the public comments both in its efforts to finalize the regulatory guidance and in its continuing interactions with industry regarding NEI 97-06.

In addition, two documents in regard to a differing professional opinion (DPO) concerning steam generator tube integrity have been placed in the NRC's Public Document Room: a document containing the NRC staff's consideration of the DPO and a memorandum to the Commission from J. Hopfenfeld dated September 25, 1998.¹ The NRC staff requests public comments on the technical issues in these documents. The DPO consideration document discusses how the staff considered the issues of the DPO during the development of the DG-1074 guidance. The September 25, 1998, memorandum informs the Commission of the DPO author's continuing concerns about steam generator tube integrity. The DPO author's memorandum to the Commission was sent after the NRC staff completed the DPO consideration document; consequently the DPO consideration document was not revised to reflect the contents of the memorandum. By making this memorandum publicly available, the NRC is not endorsing the memorandum nor its contents and is instead providing this additional information to enable the public to comment on the technical issues contained therein.

The draft guide does not represent an official NRC staff position. Accordingly, the NRC staff does not expect licensees to revise their steam generator programs to be in accordance with DG-1074.

Comments may be accompanied by relevant information or supporting data. Written comments may be submitted to the Rules and Directives Branch, Office of Administration, U.S. Nuclear

Regulatory Commission, Washington, DC 20555. Copies of comments received may be examined at the NRC Public Document Room, 2120 L Street NW., Washington, DC. Comments will be most helpful if received by June 30, 1999.

You may also provide comments via the NRC's interactive rulemaking website through the NRC home page (<http://www.nrc.gov>). This site provides the availability to upload comments as files (any format), if your web browser supports that function. For information about the interactive rulemaking website, contact Ms. Carol Gallagher, (301) 415-5905; e-mail CAG@nrc.gov. For information about the draft guide and the related documents, contact Mr. Timothy A. Reed, (301) 415-1462; e-mail TAR@nrc.gov.

Although a time limit is given for comments on this draft guide, comments and suggestions in connection with items for inclusion in guides currently being developed or improvements in all published guides are encouraged at any time.

Regulatory guides are available for inspection at the Commission's Public Document Room, 2120 L Street NW., Washington, DC. Requests for single copies of draft or final guides (which may be reproduced) or for placement on an automatic distribution list for single copies of future draft guides in specific divisions should be made in writing to the U.S. Nuclear Regulatory Commission, Washington, DC 20555, Attention: Reproduction and Distribution Services Section; or by fax to (301) 415-2289, or by e-mail to <DISTRIBUTION@NRC.GOV>. Telephone requests cannot be accommodated. Regulatory guides are not copyrighted, and Commission approval is not required to reproduce them.

(5 U.S.C. 552(a))

Dated at Rockville, Maryland, this 31st day of December 1998.

For the Nuclear Regulatory Commission.

John W. Craig,

Director, Division of Regulatory Applications, Office of Nuclear Regulatory Research.

[FR Doc. 99-1197 Filed 1-19-99; 8:45 am]

BILLING CODE 7590-01-P

NUCLEAR REGULATORY COMMISSION

Contingency Plan for the Year 2000 Issue in the Nuclear Industry

AGENCY: Nuclear Regulatory Commission.

ACTION: Notice of availability and request for comments.

SUMMARY: The U.S. Nuclear Regulatory Commission (NRC) is making available a draft document entitled, "Contingency Plan for the Year 2000 Issue in the Nuclear Industry." This document describes the current plan and approach the NRC staff expects to use in addressing contingencies resulting from potential unanticipated events due to the Year 2000 (Y2K) problem. The NRC staff believes prudent contingency planning for the Y2K problem is appropriate in addition to actions being taken by NRC licensees to achieve Y2K readiness of their facilities. The staff further recognizes the importance of a broader focus that will help to ensure that Y2K concerns regarding the national infrastructure are identified and resolved.

DATES: Public input is solicited on the overall scope and direction of the NRC Contingency Plan. To be most helpful, comments should be received no later than February 15, 1999. Comments received after this date may be considered in the further development of the Contingency Plan if practical to do so.

ADDRESSES: A copy of the draft Contingency Plan can be obtained via the World Wide Web at <http://www.nrc.gov/NRC/Y2K/Y2KCP.html> or from the NRC's Public Document Room, 2120 L Street, NW. (Lower Level), Washington, DC 20555; telephone 202-634-3273; fax 202-634-3343.

Mail Comments to: Chief, Rules and Directives Branch, Division of Administrative Services, Mail Stop T-6D59, U. S. Nuclear Regulatory Commission, Washington, DC 20555-0001 or fax to 301-415-5144. Comments may be hand-delivered to 11545 Rockville Pike, Rockville, Maryland between 7:45 a.m. and 4:15 p.m. on Federal workdays.

FOR FURTHER INFORMATION CONTACT: Joseph G. Giitter; Mail Stop T-4A43, Office for Evaluation and Analysis of Operational Data, Nuclear Regulatory Commission, Washington, DC 20555-0001; telephone 301-415-7485; E-mail JGG@NRC.GOV.

SUPPLEMENTARY INFORMATION: The NRC is working with its licensees to ensure that their potential Year 2000 (Y2K) issues have been identified and corrected, and that the agency's own computer-based systems will continue to function properly during the transition from 1999 into 2000.

Nuclear power plant licensees indicate no significant Year 2000 problems with computer systems

required for safe operation or shutdown of plants, since most are controlled by analog equipment that does not use computers. However, other non-safety computer systems used in such areas as control room displays, radiation monitoring and security functions may have potential problems. For this reason, and to be able to respond to potential unanticipated Y2K problems, the NRC is developing a contingency plan for ensuring that public health and safety and the environment will continue to be protected.

The Contingency Plan for the Year 2000 Issue, built around a reasonably conservative planning scenario, would establish NRC expectations for staff coordination with external stakeholders and staff actions to be taken during the transition period.

The staff considers the NRC Year 2000 Contingency Plan to be a rapidly evolving product, subject to anticipated but very necessary coordination efforts with other Federal agencies and with NRC licensees. In its current form, the plan discusses actions and approaches involving potential policy issues that may require more formal Commission review and approval. However, the Commission has determined that the plan should be made available to the public at this time in order to promote communication and dialogue regarding the proposals discussed therein.

Dated at Rockville, Maryland, this 13th day of January, 1999.

For the Nuclear Regulatory Commission.

Frank J. Congel,

Director, Incident Response.

[FR Doc. 99-1199 Filed 1-19-99; 8:45 am]

BILLING CODE 7590-01-P

NUCLEAR REGULATORY COMMISSION

Notice of Availability of NUREG-1700, "Standard Review Plan for Evaluating License Termination Plans for Nuclear Power Reactors"

The U.S. Nuclear Regulatory Commission is noticing issuance of NUREG-1700, "Standard Review Plan Evaluating License Termination Plans for Nuclear Power Reactors." The

standard review plan (SRP), NUREG-1700, guides staff reviewers on performing safety reviews of LTPs. Although the SRP is intended to be used by the NRC staff in conducting reviews, it can be used by interested parties responsible for conducting their own licensing reviews or developing an LTP. The principal purpose of the SRP is to ensure the quality and uniformity of staff reviews and to present a well-defined base from which to evaluate the requirements. It is also the purpose of the SRP to make the information about regulatory matters widely available to improve the understanding of the staff's review process by interested members of the public and the nuclear industry.

The document is available for inspection at the NRC's Public Document Room, 2120 L Street, NW, Washington, DC 20555, and on the NRC Home Page (<http://www.nrc.gov/>). NUREG-1700, "Standard Review Plan for Evaluating License Termination Plans for Nuclear Power Reactor" is being issued as a draft for comment. Any interested party may submit comments on this report for consideration by the NRC staff. The comment periods end June 15, 1999. Please specify the report number, draft NUREG-1700, in your comments and send them by June 15, 1999, to: Chief, Rules and Directives Branch, Office of Administration, Mail Stop T-6D59, Washington, DC 20555-0001.

FOR FURTHER INFORMATION CONTACT: Clayton L. Pittiglio, Low-Level Waste and Decommissioning Projects Branch, Division of Waste Management, Office of Nuclear Material Safety and Safeguards, U.S. Nuclear Regulatory Commission, Washington, DC 20555-0001. Telephone: 301-415-6702.

Dated at Rockville, Maryland, this 18th day of December 1998.

For the Nuclear Regulatory Commission.

John W. N. Hickey,

Chief, Low-Level Waste and Decommissioning Projects Branch, Division of Waste Management, Office of Nuclear Material Safety and Safeguards.

[FR Doc. 99-1198 Filed 1-19-99; 8:45 am]

BILLING CODE 7590-01-P

OFFICE OF MANAGEMENT AND BUDGET

Cumulative Report on Rescissions and Deferrals

December 1, 1998.

This report is submitted in fulfillment of the requirement of Section 1014(e) of the Congressional Budget and Impoundment Control Act of 1974 (Public Law 93-344). Section 1014(e) requires a monthly report listing all budget authority for the current fiscal year for which, as of the first day of the month, a special message had been transmitted to Congress.

This report gives the status, as of December 1, 1998, of the two deferrals contained in the first special message for FY 1999. The message was transmitted to Congress on October 22, 1998.

Deferrals (Attachments A and B)

As of December 1, 1998, \$167.6 million in budget authority was being deferred from obligation. Attachment B shows the status of each deferral reported during FY 1999.

Information from Special Message

The special message containing information on the deferrals that are covered by this cumulative report is printed in the edition of the **Federal Register** cited below:

63 FR 63949-50, Tuesday, November 17, 1998.

Jacob J. Lew,

Director.

ATTACHMENT A.—STATUS OF FY 1999 DEFERRALS

[In millions of dollars]

	Budgetary resources
Deferrals proposed by the President	167.6
Routine Executive releases through December 1, 1998 (OMB/Agency releases of \$0)
Overtaken by the Congress
Currently before the Congress ...	167.6

BILLING CODE 3110-01-P

[Federal Register: May 19, 1998 (Volume 63, Number 96)]

[Notices]

[Page 27607-27608]

From the Federal Register Online via GPO Access [wais.access.gpo.gov]

[DOCID: **fr19my98-132**]

NUCLEAR REGULATORY COMMISSION

Year 2000 Readiness of Computer Systems at Nuclear Power Plants;
Issue

AGENCY: Nuclear Regulatory Commission.

ACTION: Notice of Issuance.

SUMMARY: The Nuclear Regulatory Commission (NRC) has issued Generic Letter (GL) 98-01 to all holders of operating licenses for nuclear power plants, except those who have permanently ceased operations and have certified that fuel has been permanently removed from the reactor vessel, to require the submittal of written responses that will give the NRC the necessary assurance that addressees are effectively addressing the year 2000 (Y2K) problem in computer systems at their respective facilities. Simply stated, the Y2K problem pertains to the potential for a system or an application to experience date-related problems, such as misreading ``00'' as the year 1900 rather than 2000. This generic letter requires the following information from addressees, under the provisions of Section 182a of the Atomic Energy Act of 1954, as amended, and 10 CFR 50.54(f): (1) Written confirmation that each addressee is implementing an effective plan to address the Y2K problem and provide for safe operation of their respective facilities prior to January 1, 2000, and (2) written certification that the facilities are Y2K ready with regard to compliance with the terms and conditions of the facility licenses and NRC regulations.

The generic letter is a ``rule'' for purposes of the Small Business Regulatory Enforcement Fairness Act (5 U.S.C., Chapter 8). The staff has received confirmation from the Office of Management and Budget that the generic letter is a non-major rule.

The generic letter is available in the NRC Public Document Room under accession number 9805050192.

DATES: The generic letter was issued on May 11, 1998.

ADDRESSEES: Not applicable.

FOR FURTHER INFORMATION CONTACT: Matthew Chiramal, at (301) 415-2845.

SUPPLEMENTARY INFORMATION: This generic letter only requires information from addressees under the provisions of Section 182a of the Atomic Energy Act of 1954, as amended, and 10 CFR 50.54(f). The generic letter does not constitute a backfit as defined in 10 CFR 50.109(a)(1) since it does not impose modifications of or additions to

[[Page 27608]]

structures, systems or components or to design or operation of an addressee's facility. It also does not impose an interpretation of the Commission's rules that is either new or different from a previous staff position. The staff, therefore, has not performed a backfit analysis.

Dated at Rockville, Maryland, this 11th day of May 1998.

For The Nuclear Regulatory Commission.

David B. Matthews,

Acting Director, Division of Reactor Program Management, Office of Nuclear Reactor Regulation.

[FR Doc. 98-13190 Filed 5-18-98; 8:45 am]

BILLING CODE 7590-01-P

licensee calculated the thyroid and whole body doses at the EAB as 13 rem and 0.55 rem, respectively.

The LPZ doses, which were reported for the first time by the licensee, were calculated as 5 rem thyroid and 0.15 whole body. The second case, which was evaluated, assumed primary coolant was at the maximum instantaneous technical specification value of dose equivalent ^{131}I of $60\mu\text{Ci/g}$. The results of this case were presented for the first time. The licensee calculated the doses at the EAB as 22 rem thyroid and 0.66 rem whole body. The LPZ doses were calculated as 6 rem thyroid and 0.18 rem whole body.

Even though there is some increase in dose for the Seized Rotor Event, the actual total dose is a fraction of the limits of 10 CFR part 100, as noted above, and there is a low probability of these accidents. This change does not significantly affect the risk of any dominant accident scenario, and the effect on overall risk of an accident at Calvert Cliffs Nuclear Power Plant is insignificant. The change will not increase the probability or consequences of accidents, no changes are being made in the types of any effluents that may be released offsite, and there is no significant increase in the allowable individual or cumulative occupational radiation exposure. Accordingly, the Commission concludes that there are no significant radiological environmental impacts associated with the proposed action.

The staff has performed confirmatory calculations of the consequences of an MSLB, SGTR and Seized Rotor Events. The staff has confirmed that the consequences of these accidents will result in offsite doses which are a small fraction of the 10 CFR part 100 dose guidelines. In addition, the staff has determined that the proposed action will not result in an increase in normal radiological effluents from the Calvert Cliffs Nuclear Power Plant such that 10 CFR part 20 and Appendix I to 10 CFR part 50 will continue to be met.

With regard to potential nonradiological impacts, the proposed action does involve features located entirely within the restricted area as defined in 10 CFR part 20. It does not affect nonradiological plant effluents and has no other environmental impact. Accordingly, the Commission concludes that there are no significant nonradiological environmental impacts associated with the proposed action.

Alternatives to the Proposed Action

The principal alternative to approving the license amendment request needed to allow plugging up to 2500 tubes per

steam generator would be to deny the request and retain the current coolant flow limitations. However, this alternative could reduce operational flexibility as it may prevent a Unit 1 start-up following the upcoming refueling outage, if the steam generator tube inspections necessitate plugging greater than 800 tubes in either of the unit's two steam generators. Furthermore, denial of the amendment would not significantly enhance the protection of the environment as the impacts of this alternative and the proposed action are similar.

Alternative Use of Resources

This action does not involve the use of any resources not previously considered in the Final Environmental Statement for the Calvert Cliffs Nuclear Power Plant, Unit Nos. 1 and 2 dated April 1973.

Agencies and Persons Consulted

In accordance with its stated policy, on May 5, 1998, the staff consulted with the Maryland State official, Richard I. McLean of the Maryland Department of Natural Resources, regarding the environmental impact of the proposed action. The State official had no comments.

Finding of No Significant Impact

Based upon the environmental assessment, the Commission concludes that the proposed action will not have a significant effect on the quality of the human environment. Accordingly, the Commission has determined not to prepare an environmental impact statement for the proposed action.

For further details with respect to the proposed action, see the licensee's letter dated January 31, 1997, as supplemented by letters dated February 13, February 28, March 25, April 16, August 16, and September 29, 1997, and January 22, March 17, April 8, and April 21, 1998, which are available for public inspection at the Commission's Public Document Room, The Gelman Building, 2120 L Street, NW., Washington, DC, and at the local public document room located at the Calvert County Library, Prince Frederick, Maryland 20678.

Dated at Rockville, Maryland, this 12th day of May 1998.

For The Nuclear Regulatory Commission.

S. Singh Bajwa,

Director, Project Directorate I-1, Division of Reactor Projects—I/II, Office of Nuclear Reactor Regulation.

[FR Doc. 98-13188 Filed 5-18-98; 8:45 am]

BILLING CODE 7590-01-P

NUCLEAR REGULATORY COMMISSION

Year 2000 Readiness of Computer Systems at Nuclear Power Plants; Issue

AGENCY: Nuclear Regulatory Commission.

ACTION: Notice of Issuance.

SUMMARY: The Nuclear Regulatory Commission (NRC) has issued Generic Letter (GL) 98-01 to all holders of operating licenses for nuclear power plants, except those who have permanently ceased operations and have certified that fuel has been permanently removed from the reactor vessel, to require the submittal of written responses that will give the NRC the necessary assurance that addressees are effectively addressing the year 2000 (Y2K) problem in computer systems at their respective facilities. Simply stated, the Y2K problem pertains to the potential for a system or an application to experience date-related problems, such as misreading "00" as the year 1900 rather than 2000. This generic letter requires the following information from addressees, under the provisions of Section 182a of the Atomic Energy Act of 1954, as amended, and 10 CFR 50.54(f): (1) Written confirmation that each addressee is implementing an effective plan to address the Y2K problem and provide for safe operation of their respective facilities prior to January 1, 2000, and (2) written certification that the facilities are Y2K ready with regard to compliance with the terms and conditions of the facility licenses and NRC regulations.

The generic letter is a "rule" for purposes of the Small Business Regulatory Enforcement Fairness Act (5 U.S.C., Chapter 8). The staff has received confirmation from the Office of Management and Budget that the generic letter is a non-major rule.

The generic letter is available in the NRC Public Document Room under accession number 9805050192.

DATES: The generic letter was issued on May 11, 1998.

ADDRESSEES: Not applicable.

FOR FURTHER INFORMATION CONTACT: Matthew Chiramal, at (301) 415-2845.

SUPPLEMENTARY INFORMATION: This generic letter only requires information from addressees under the provisions of Section 182a of the Atomic Energy Act of 1954, as amended, and 10 CFR 50.54(f). The generic letter does not constitute a backfit as defined in 10 CFR 50.109(a)(1) since it does not impose modifications of or additions to

structures, systems or components or to design or operation of an addressee's facility. It also does not impose an interpretation of the Commission's rules that is either new or different from a previous staff position. The staff, therefore, has not performed a backfit analysis.

Dated at Rockville, Maryland, this 11th day of May 1998.

For The Nuclear Regulatory Commission.

David B. Matthews,

Acting Director, Division of Reactor Program Management, Office of Nuclear Reactor Regulation.

[FR Doc. 98-13190 Filed 5-18-98; 8:45 am]

BILLING CODE 7590-01-P

SECURITIES AND EXCHANGE COMMISSION

[Release No. 34-39985; File No. SR-NASD-98-28]

Self-Regulatory Organizations; Notice of Filing of Proposed Rule Change by the National Association of Securities Dealers, Inc. Relating to Approval of Research Reports

May 12, 1998.

Pursuant to Section 19(b)(1) of the Securities Exchange Act of 1934 ("Act"),¹ notice is hereby given that on April 27, 1998, the NASD Regulation, Inc. ("NASD Regulation") filed with the Securities and Exchange Commission ("Commission") the proposed rule change as described in Items I, II, and III below, which Items have been prepared by NASD Regulation. The Commission is publishing this notice to solicit comments on the proposed rule change from interested persons.

I. Self-Regulatory Organization's Statement of the Terms of Substance of the Proposed Rule Change

NASD Regulation is proposing to amend Rule 2210, "Communications with the Public," of the Conduct Rules of the National Association of Securities Dealers, Inc. ("NASD" or "Association"), to permit the approval of research reports by a supervisory analyst acceptable to the New York Stock Exchange ("NYSE;") under NYSE Rule 344, "Supervisory Analysts,"² to satisfy NASD requirements that research reports be approved by a registered principal. Below is the text of the

proposed rule change. Proposed new language is in italics.

2200. Communications with Customers and the Public

2210. Communications with the Public

* * * * *

(b) Approval and Recordkeeping.

(1) Each item of advertising and sales literature shall be approved by signature or initial, prior to use or filing with the Association, by a registered principal of the member. *This requirement may be met, only with respect to corporate debt and equity securities that are the subject of research reports as that term is defined in Rule 472 of the New York Stock Exchange, by the signature or initial of a supervisory analyst approved pursuant to Rule 344 of the New York Stock Exchange.*

* * * * *

II. Self-Regulatory Organizations' Statement of the Purpose of, and Statutory Basis for, the Proposed Rule Change

In its filing with the Commission, NASD Regulation included statements concerning the purpose of and basis for the proposed rule change and discussed any comments it received on the proposed rule change. The text of these statements may be examined at the places specified in Item IV below. NASD Regulation has prepared summaries, set forth in Sections A, B, and C below, of the most significant aspects of such statements.

A. Self-Regulatory Organization's Statement of the Purpose of, and Statutory Basis for, the Proposed Rule Change

1. Purpose

a. *Background.* Subparagraph (b)(1) to NASD Rule 2210 regarding Communications with the Public requires each item of advertising and sales literature to be approved by signature or initial of a registered principal of an NASD member prior to use or filing with NASD Regulation. The definition of "sales literature" in subparagraph (a)(2) to NASD Rule 2210 includes research reports.

Paragraph (b) to NYSE Rule 472, "Communications with the Public," requires that research reports be prepared or approved by a supervisory analyst acceptable to the NYSE under NYSE Rule 334. NYSE Rule 472, Supplementary Material .10 defines "research reports" as "* * * an analysis of individual companies, industries, market conditions, securities or other investment vehicles which provide information reasonably sufficient upon

which to base an investment decision." In order to become a supervisory analyst under NYSE Rule 344, an applicant may present evidence of appropriate experience and either (i) pass an NYSE Supervisory Analysts Examination, or (ii) successfully complete a specified level of the Chartered Financial Analysts Examination prescribed by the NYSE and pass only that portion of the NYSE Supervisory Analysts Examination dealing with Exchange rules on research standards and related matters.³

A joint NASD/NYSE member raised the issue of whether the approval of research reports by a supervisory analyst approved by the NYSE under NYSE Rule 344 could satisfy the NASD requirement that each item of advertising and sales literature be approved by signature or initial of a registered principal prior to use or filing with NASD Regulation.

b. *Discussion.* The NYSE designation of "supervisory analyst" does not constitute a registration category for NASD principals. The NASD Regulation staff reviewed the content outline for the supervisory analyst examination. The particular categories of securities addressed in the "securities analysis" section of the outline are fixed income securities and equity securities. The NASD Regulation staff concluded that the coverage in the supervisory analysts examination of the NYSE communication rules is comparable to the communication materials covered in the NASD principal examination. Thus, NASD Regulation believes that with respect to the level of training and experience necessary for the review of research reports on debt and equity, the level of supervisory analyst registration is comparable to the level of NASD principal registration.

Given that the scope of approval authority is limited to research reports and that the material in the NYSE supervisory analyst examination and the NASD principal examination is comparable in this area, the NASD Regulation staff concluded that the investor protection goals intended by the NASD's current principal review requirement rule could be satisfied by NYSE requirements in this area.

The proposed rule change amends subparagraph (b)(1) to NASD Rule 2210 to state that the requirement that advertising and sales literature be approved by a registered principal of an NASD member firm may be met, with respect to corporate debt and equity securities that are the subject of research

³ See NYSE Rule 344, Supplementary Material .10.

¹ 15 U.S.C. 78s(b)(1).

² NYSE Rule 344 states that "Supervisory Analysts * * * shall be acceptable to, and approved by, the Exchange." NYSE Rule 344, Supplementary Material .10 sets forth qualifications to be considered by the Exchange.

[Federal Register: January 29, 1998 (Volume 63, Number 19)]

[Notices]

[Page 4498-4501]

From the Federal Register Online via GPO Access [wais.access.gpo.gov]

[DOCID: **fr29ja98-141**]

NUCLEAR REGULATORY COMMISSION

Proposed Generic Communication; Year 2000 Readiness of Computer Systems at Nuclear Power Plants (MA0138)

AGENCY: Nuclear Regulatory Commission.

ACTION: Notice of opportunity for public comment.

SUMMARY: The Nuclear Regulatory Commission (NRC) is proposing to issue a generic letter to all holders of operating licenses for nuclear power plants, except those who have permanently ceased operations and have certified that fuel has been permanently removed from the reactor vessel, to require that all addressees provide certain information regarding their programs, planned or implemented, to address the Year 2000 (Y2K) problem in computer systems at their facilities. In particular, addressees are being asked to provide written confirmation of implementation of the programs, and written certification that their facilities are Y2K ready and in compliance with the terms and conditions of their licenses and NRC regulations. This information is being requested under 10 CFR 50.54(f).

The NRC is seeking comment from interested parties on both the technical and regulatory aspects of the proposed generic letter presented under the Supplementary Information heading. In this regard, the NRC encourages the industry to propose a viable alternative to the generic letter as a means of providing the necessary assurance to the NRC that licensees are effectively addressing the Y2K problem in computer systems at their facilities. Such an alternative could consist of a voluntary initiative on the part of the nuclear power industry to obtain licensee inputs and communicate its findings to the NRC.

The proposed generic letter has been endorsed by the Committee to Review Generic Requirements (CRGR). Relevant information that was sent to the CRGR will be placed in the NRC Public Document Room. The NRC will consider comments received from interested parties in the final

evaluation of the proposed generic letter. The NRC's final evaluation will include a review of the technical position and, as appropriate, an analysis of the value/impact on licensees. Should this generic letter be issued by the NRC, it will become available for public inspection in the NRC Public Document Room.

DATES: Comment period expires March 2, 1998. Comments submitted after this date will be considered if it is practical to do so, but assurance of consideration cannot be given except for comments received on or before this date.

ADDRESSES: Submit written comments to Chief, Rules and Directives Branch, Division of Administrative Services, U.S. Nuclear Regulatory Commission, Mail Stop T6-D69, Washington, DC 20555-0001. Written comments may also be delivered to 11545 Rockville Pike, Rockville, Maryland, between 7:45 am to 4:15 pm, Federal workdays. Copies of written comments received may be examined at the NRC Public Document Room, 2120 L Street, N.W. (Lower Level), Washington, D.C.

FOR FURTHER INFORMATION CONTACT: Matthew Chiramal, (301) 415-2845.

SUPPLEMENTARY INFORMATION:

NRC Generic Letter No. 98-XX: Year 2000 Readiness of Computer Systems at Nuclear Power Plants

Addressees

All holders of operating licenses for nuclear power plants, except those who have permanently ceased operations and have certified that fuel has been permanently removed from the reactor vessel.

Purpose

The U.S. Nuclear Regulatory Commission (NRC) is issuing this generic letter to require that all addressees provide the following information regarding their programs, planned or implemented, to address the Year 2000 (Y2K) problem in computer systems at their facilities: (1) written confirmation of implementation of the programs, and (2) written certification that the facilities are Y2K ready and in compliance with the terms and conditions of their licenses and NRC regulations.

Description of Circumstances

Simply stated the Y2K computer problem pertains to the potential

inability of computers to correctly recognize dates beyond the current century, i.e., beginning with January 1, 2000 and beyond. The problem results from computer hardware or software that uses two-digit fields to represent the year. If the Y2K problem is not corrected, computer systems will be unable to recognize the change in century and will misread ``00,' ' for the year 2000, as 1900. The Y2K problem has the potential to interfere with the proper operation of any computer system, any hardware that is microprocessor-based (embedded

[[Page 4499]]

software), and any software or database at nuclear power plants. As a consequence, there is a risk that affected plant systems and equipment will fail to function properly.

The Y2K problem is urgent because it has a fixed, non-negotiable deadline. This matter requires priority attention because of the limited time remaining to assess the magnitude of the problem, its associated technical and cost risks, and resource availability, and to implement programs that will achieve satisfactory resolution.

Existing reporting requirements under 10 CFR part 21, 10 CFR 50.72, and 10 CFR 50.73 provide for notification to the NRC staff of deficiencies, non-conformance and failures, such as the Y2K problem in safety-related systems. To date, the NRC staff has not identified nor received notification from licensees or vendors of digital protection systems (e.g., Westinghouse, General Electric, Combustion Engineering, Foxboro, Allen Bradley, or Framatome/Babcock & Wilcox) that a Y2K problem exists with safety-related initiation and actuation systems. However, problems have been identified in non-safety, but important, computer-based systems. Such systems, primarily databases and data collection processes necessary for plant operation that are date driven, may need to be modified for Y2K compliance. Some examples of systems and computer equipment that may be affected by Y2K problems follow:

- Security computers
- Plant process (data scan, log, and alarm) and safety parameter display system computers
- Emergency response systems
- Radiation monitoring systems
- Dosimeters and readers
- Plant simulators
- Engineering programs
- Communication systems
- Inventory control systems
- Surveillance and maintenance tracking systems
- Control systems

To alert nuclear power plant licensees to the Y2K problem, the NRC issued Information Notice (IN) 96-70, ``Year 2000 Effect on Computer System Software,' on December 24, 1996. In IN 96-70 the staff described the potential problems that nuclear power plant computer systems and software may encounter as a result of the change to the new century and how the Y2K issue may affect NRC licensees. In IN 96-70 the staff encouraged licensees to examine their uses of computer systems and software well before the turn of the century and suggested that licensees consider actions appropriate to examine and evaluate their computer systems for Y2K vulnerabilities. The NRC staff also incorporated recognition of the Y2K concern in the updated Standard Review Plan (SRP), NUREG-0800, Chapter 7, ``Instrumentation and Control,' dated August 1997, which contains guidance for staff review of computer-based instrumentation and control systems.

At the Nuclear Utilities Software Management Group (NUSMG) Year 2000 Workshop, an industry workshop held in July 1997, nuclear power plant licensees described their Y2K programs, and gave examples of areas in which they addressed Y2K issues in order to ensure the safety and operability of their plants on January 1, 2000. Some of the issues discussed were the (1) evaluation of the impact of the Y2K problem on plant equipment, (2) assessment process involved in the identification of Y2K affected components, vendors, and interfaces, (3) development of Y2K testing strategies, and (4) identification of budget needs to address the Y2K problem.

The Nuclear Energy Institute (NEI) met with NUSMG and nuclear plant utility representatives in August 1997 to formulate an industry-wide plan to address the Y2K issue. On October 7, 1997, representatives of NEI and NUSMG met with the NRC staff to discuss actions NEI was taking to help utilities make their plants ``Year 2000 ready.' NEI was preparing a framework document with guidance for utility use in readying for the Year 2000. The framework document makes a distinction in terminology between ``Y2K readiness'' (``Y2K Ready'' is defined as a computer system or application that has been determined to be suitable for continued use into the year 2000 even though the computer system or application is not fully Y2K Compliant) and ``Y2K compliance'' (``Y2K Compliant'' is defined as computer systems or applications that accurately process date/time data (including but not limited to, calculating, comparing, and sequencing) from, into and between the twentieth and twenty-first centuries, the years 1999 and 2000, and leap-year calculations). NEI/NUSMG issued the framework document NEI/NUSMG 97-07, ``Nuclear Utility Year 2000 Readiness'' to all licensees in November 1997. The document recommends methods for nuclear utilities to attain Y2K readiness and thereby ensure that their facilities remain safe and continue to operate within the requirements of their license. The scope of NEI/NUSMG 97-07 covers software, or software-based systems

or interfaces, whose failure (due to the Y2K problem) would (1) prevent the performance of the safety function of a structure, system or component and (2) degrade, impair, or prevent operability of the nuclear facility.

Discussion

Diverse concerns are associated with the potential impact of the Y2K problem on nuclear power plants because of the variety and types of computer systems in use. Some of the concerns are the (1) scheduling of maintenance and technical specification surveillance requirements, (2) use and application of programmable logic controllers and other commercial off-the-shelf software and hardware, (3) operation of process control systems, (4) performance of engineering calculations, and (5) collection of operating and post-accident plant parameter data.

Some vendors have taken such actions as placing information on the Internet discussing which of their products are Y2K compliant, and how the vendor is addressing the Y2K problem with respect to specific products, including products purchased by their nuclear power plant customers. When addressing some of the particular issues associated with the use and application of software, it has been found that even if the application has no apparent date manipulation algorithms, it may still be affected by a Y2K related problem. For example, a subroutine that date stamps the header information in archival tapes regardless of the rest of the content of the tape may be affected. In addition, although individually several systems may be ``date safe,'' the integrated operations that the systems support may be vulnerable to the Y2K problem. Further, there are potential impacts from the operating system supporting their instrumentation system's application software and from sub-programs (such as calibration and data recording/reporting) associated with the main application software.

One application which is common to all power reactor licensees is the link between plant computers and the NRC's Emergency Response Data System (ERDS). This application performs the communication and data transmission function which provide near real-time data availability to NRC and state incident response personnel during declared emergencies. The NRC is currently performing Y2K related upgrades to ERDS which will maintain the same communication protocol as the current system with the exception that either 2-digit or 4-digit year fields will be accepted. Those licensees that anticipate changes to their ERDS link should allow time in their schedules for retesting their systems. NRC contractors

[[Page 4500]]

will support requests for testing on a ``first come, first served'' basis.

NEI/NUSMG 97-07 suggests a strategy for developing and implementing a nuclear utility Y2K program. The strategy recognizes management, implementation, quality assurance, regulatory considerations, and documentation as the fundamental elements of a successful Y2K project. The document contains additional guidance for these fundamental elements. The recommended components for management planning are management awareness, sponsorship, project leadership, project objectives, project management team, management plan, project reports, interfaces, resources, oversight, and quality assurance. The suggested phases of implementation are awareness, initial assessment (which includes inventory, categorization, classification, prioritization, and analysis of initial assessment), detailed assessment (including vendor evaluation, utility-owned or -supported software evaluation, interface evaluation, remedial planning), remediation, Y2K testing and validation, and notification. The quality assurance (QA) measures apply to project management QA and implementation QA.

Regulatory considerations include the performance of appropriate reviews, reporting requirements, and documentation. Documentation of Y2K program activities and results includes documentation requirements, project management documentation, vendor documentation, inventory lists, checklists for initial and detailed assessments, and record retention. NEI/NUSMG 97-07 also contains examples of various plans and checklists as appendices.

The staff believes that the guidance in NEI/NUSMG 97-07, when properly implemented, will present an appropriate approach for licensees to address the Y2K problem at nuclear power plant facilities.

In the course of implementing the Y2K readiness program, problems could be identified that potentially impact the licensing basis of the plants. In certain cases, license amendments may be needed to address the problem resolution. Licensees should submit such license amendments to the NRC on a timely basis. The utility Y2K readiness programs and schedules should have the flexibility to accommodate such an eventuality. In addition, licensees are reminded that any changes to their facilities that impact their current licensing basis must be reviewed in accordance with existing NRC requirements and the change properly documented.

Required Response

In order to gain the necessary assurance that addressees are effectively addressing the Y2K problem and are in compliance with the terms and conditions of their licenses and NRC regulations, the NRC staff requires that all addressees submit a written response to this generic letter as follows:

(1) Within 90 days of the date of this generic letter, submit a written response indicating whether or not you have pursued and are

continuing to pursue a Y2K readiness program as outlined in NEI/NUSMG 97-07. If you are not conforming to the NEI/NUSMG guidance, present a brief description of the program(s) that have already been completed, are being conducted, or are planned to ensure Y2K readiness of the computer systems at your facility(ies). This response should address the program's scope, assessment process, and plans for corrective actions (including testing, and schedules).

(2) Upon completing your Y2K readiness program, or, in any event, no later than July 1, 1999, submit a written response confirming that your facility is Y2K ready and in compliance with the terms and conditions of your license(s) and NRC regulations. In addition, the response should contain a status report of work remaining to be done to complete your Y2K program, including completion schedules. {'`Y2K Ready'' is defined as a computer system or application that has been determined to be suitable for continued use into the year 2000 even though the computer system or application is not fully Y2K Compliant. ``Y2K Compliant'' is defined as computer systems or applications that accurately process date/time data (including but not limited to, calculating, comparing, and sequencing) from, into and between the twentieth and twenty-first centuries, the years 1999 and 2000, and leap-year calculations.}

Address the written reports to the U.S. Nuclear Regulatory Commission, Attention: Document Control Desk, Washington, D.C. 20555-0001, under oath or affirmation under the provisions of Section 182a, Atomic Energy Act 1954, as amended, and 10 CFR 50.54(f). In addition, submit a copy to the appropriate regional administrator.

Backfit Discussion

This generic letter only requests information from addressees under the provisions of Section 182a of the Atomic Energy Act of 1954, as amended, and 10 CFR 50.54(f). The requested information will enable the staff to verify that each nuclear power plant licensee is implementing an effective plan to address the Y2K problem and provide for safe operation of the facility before January 1, 2000, and is in compliance with the terms and conditions of their license(s) and NRC regulations. The following NRC regulations are a basis for this request:

- <bullet> 10 CFR 50.36, ``Technical Specifications,'' paragraph (c)(3), ``Surveillance requirements,'' and paragraph (c) (5), ``Administrative controls.'' These relate, respectively, to requirements relating to test, calibration, or inspection to assure that the necessary quality of systems and components is maintained, and to provisions relating to management, procedures, record keeping, and review and audit necessary to assure operation of the facility in a safe manner.

- <bullet> 10 CFR 50.47, ``Emergency plans,'' paragraph (b)(8), which

relates to the provision and maintenance of adequate emergency facilities and equipment to support the emergency responses.

<bullet> Appendix B to 10 CFR Part 50, Criterion III, ``Design Control,' ' requires that design control measures shall provide for verifying or checking the adequacy of design, such as by the performance of design reviews, by the use of alternate or simplified calculational methods, or by the performance of a suitable testing program.

<bullet> Appendix B to 10 CFR Part 50, Criterion XVII, ``Quality Assurance Records,' ' requires that sufficient records shall be maintained to furnish evidence of activities affecting quality. The records are to include, among others, operating logs and results of reviews.

<bullet> Appendix E to 10 CFR 50, Section VI, ``Emergency Response Data System' ' which relates to the provision and maintenance of licensee links to the Emergency Response Data System.

In addition, the following requirements from Appendix A to 10 CFR part 50, ``General Design Criteria for Nuclear Power Plants', ' also provide a basis for the request: (In the statement of consideration (SOC) for the amendment to 10 CFR part 50 which added Appendix A, ``General Design Criteria for Nuclear Power Plants,' ' published in the Federal Register on February 20, 1971, the Commission noted that the general design criteria added as Appendix A to Part 50 establish the minimum requirements for the principal design criteria for water-cooled nuclear power plants similar in design and location to plants for which construction permits have been issued

[[Page 4501]]

by the Commission. Principal design criteria established by an applicant and accepted by the Commission will be incorporated by reference in the construction permit. The SOC also notes that in considering the issuance of an operating license under part 50, the Commission will require assurance that these criteria have been satisfied in the detailed design and construction of the facility and any changes in such criteria are justified. It should be noted that a proposed Appendix A to 10 CFR part 50 was published in the Federal Register on July 11, 1967, and the comments and suggestions received in response to the notice of proposed rule making and subsequent developments in the technology and in the licensing process have been considered in developing the general design criteria.)

<bullet> Appendix A to 10 CFR part 50, General Design Criterion (GDC) 13, ``Instrumentation and control,' ' which addresses the provision of appropriate instrumentation and controls to monitor and control systems and variables during normal operation, anticipated operational occurrences, and accident conditions as appropriate to

ensure adequate safety.

<bullet> Appendix A to 10 CFR part 50, GDC 19, ``Control room,'' which requires the provision of a control room from which actions can be taken to operate the nuclear plant safely.

<bullet> Appendix A to 10 CFR part 50, GDC 23, ``Protection system failure modes,'' which requires that the protection system shall be designed to fail into a safe state or into a state demonstrated to be acceptable on some other defined basis.

Dated at Rockville, Maryland, this 23rd day of January 1998.

For the Nuclear Regulatory Commission.

Jack W. Roe,

Acting Director, Division of Reactor Program Management, Office of Nuclear Reactor Regulation.

[FR Doc. 98-2182 Filed 1-28-98; 8:45 am]

BILLING CODE 7590-01-P

greater environmental impact need not be evaluated. As an alternative to the proposed exemption, the staff considered denial of the requested exemption. Denial of the request would result in no change in current environmental impacts. The environmental impacts of the proposed action and the alternative action are similar.

Alternative Use of Resources

This action does not involve the use of any resources not previously considered in the "Final Environmental Statement Related to the Operation of Limerick Generating Station, Units 1 and 2," dated November 1973.

Agencies and Persons Consulted

In accordance with its stated policy, on January 23, 1998, the staff consulted with the Pennsylvania State official, Mr. David Ney of the Bureau of Radiation Protection, Department of Environmental Protection, regarding the environmental impact of the proposed action. The State official had no comments.

Finding of No Significant Impact

Based upon the environmental assessment, the Commission concludes that the proposed action will not have a significant effect on the quality of the human environment.

Accordingly, the Commission has determined not to prepare an environmental impact statement for the proposed action.

For further details with respect to the proposed action, see the licensee's letter dated December 23, 1997, which is available for public inspection at the Commission's Public Document Room, The Gelman Building, 2120 L Street, NW., Washington, DC, and at the local public document room located at the Pottstown Public Library, 500 High Street, Pottstown, PA 19464.

Dated at Rockville, Maryland, this 23rd day of January 1998.

For the Nuclear Regulatory Commission.

Bartholomew C. Buckley,

Senior Project Manager, Project Directorate I-2, Division of Reactor Projects—I/II, Office of Nuclear Reactor Regulation.

[FR Doc. 98-2179 Filed 1-28-98; 8:45 am]

BILLING CODE 7590-01-P

NUCLEAR REGULATORY COMMISSION

Proposed Generic Communication; Year 2000 Readiness of Computer Systems at Nuclear Power Plants (MA0138)

AGENCY: Nuclear Regulatory Commission.

ACTION: Notice of opportunity for public comment.

SUMMARY: The Nuclear Regulatory Commission (NRC) is proposing to issue a generic letter to all holders of operating licenses for nuclear power plants, except those who have permanently ceased operations and have certified that fuel has been permanently removed from the reactor vessel, to require that all addressees provide certain information regarding their programs, planned or implemented, to address the Year 2000 (Y2K) problem in computer systems at their facilities. In particular, addressees are being asked to provide written confirmation of implementation of the programs, and written certification that their facilities are Y2K ready and in compliance with the terms and conditions of their licenses and NRC regulations. This information is being requested under 10 CFR 50.54(f).

The NRC is seeking comment from interested parties on both the technical and regulatory aspects of the proposed generic letter presented under the Supplementary Information heading. In this regard, the NRC encourages the industry to propose a viable alternative to the generic letter as a means of providing the necessary assurance to the NRC that licensees are effectively addressing the Y2K problem in computer systems at their facilities. Such an alternative could consist of a voluntary initiative on the part of the nuclear power industry to obtain licensee inputs and communicate its findings to the NRC.

The proposed generic letter has been endorsed by the Committee to Review Generic Requirements (CRGR). Relevant information that was sent to the CRGR will be placed in the NRC Public Document Room. The NRC will consider comments received from interested parties in the final evaluation of the proposed generic letter. The NRC's final evaluation will include a review of the technical position and, as appropriate, an analysis of the value/impact on licensees. Should this generic letter be issued by the NRC, it will become available for public inspection in the NRC Public Document Room.

DATES: Comment period expires March 2, 1998. Comments submitted after this date will be considered if it is practical to do so, but assurance of consideration cannot be given except for comments received on or before this date.

ADDRESSES: Submit written comments to Chief, Rules and Directives Branch, Division of Administrative Services, U.S. Nuclear Regulatory Commission, Mail Stop T6-D69, Washington, DC 20555-0001. Written comments may also be delivered to 11545 Rockville Pike, Rockville, Maryland, between 7:45 am to 4:15 pm, Federal workdays. Copies of written comments received may be examined at the NRC Public Document Room, 2120 L Street, N.W. (Lower Level), Washington, D.C.

FOR FURTHER INFORMATION CONTACT: Matthew Chiramal, (301) 415-2845.

SUPPLEMENTARY INFORMATION:

NRC Generic Letter No. 98-XX: Year 2000 Readiness of Computer Systems at Nuclear Power Plants

Addressees

All holders of operating licenses for nuclear power plants, except those who have permanently ceased operations and have certified that fuel has been permanently removed from the reactor vessel.

Purpose

The U.S. Nuclear Regulatory Commission (NRC) is issuing this generic letter to require that all addressees provide the following information regarding their programs, planned or implemented, to address the Year 2000 (Y2K) problem in computer systems at their facilities: (1) written confirmation of implementation of the programs, and (2) written certification that the facilities are Y2K ready and in compliance with the terms and conditions of their licenses and NRC regulations.

Description of Circumstances

Simply stated the Y2K computer problem pertains to the potential inability of computers to correctly recognize dates beyond the current century, i.e., beginning with January 1, 2000 and beyond. The problem results from computer hardware or software that uses two-digit fields to represent the year. If the Y2K problem is not corrected, computer systems will be unable to recognize the change in century and will misread "00," for the year 2000, as 1900. The Y2K problem has the potential to interfere with the proper operation of any computer system, any hardware that is microprocessor-based (embedded

software), and any software or database at nuclear power plants. As a consequence, there is a risk that affected plant systems and equipment will fail to function properly.

The Y2K problem is urgent because it has a fixed, non-negotiable deadline. This matter requires priority attention because of the limited time remaining to assess the magnitude of the problem, its associated technical and cost risks, and resource availability, and to implement programs that will achieve satisfactory resolution.

Existing reporting requirements under 10 CFR part 21, 10 CFR 50.72, and 10 CFR 50.73 provide for notification to the NRC staff of deficiencies, non-conformance and failures, such as the Y2K problem in safety-related systems. To date, the NRC staff has not identified nor received notification from licensees or vendors of digital protection systems (e.g., Westinghouse, General Electric, Combustion Engineering, Foxboro, Allen Bradley, or Framatome/Babcock & Wilcox) that a Y2K problem exists with safety-related initiation and actuation systems. However, problems have been identified in non-safety, but important, computer-based systems. Such systems, primarily databases and data collection processes necessary for plant operation that are date driven, may need to be modified for Y2K compliance. Some examples of systems and computer equipment that may be affected by Y2K problems follow:

- Security computers
- Plant process (data scan, log, and alarm) and safety parameter display system computers
- Emergency response systems
- Radiation monitoring systems
- Dosimeters and readers
- Plant simulators
- Engineering programs
- Communication systems
- Inventory control systems
- Surveillance and maintenance tracking systems
- Control systems

To alert nuclear power plant licensees to the Y2K problem, the NRC issued Information Notice (IN) 96-70, "Year 2000 Effect on Computer System Software," on December 24, 1996. In IN 96-70 the staff described the potential problems that nuclear power plant computer systems and software may encounter as a result of the change to the new century and how the Y2K issue may affect NRC licensees. In IN 96-70 the staff encouraged licensees to examine their uses of computer systems and software well before the turn of the century and suggested that licensees consider actions appropriate to examine and evaluate their computer systems for Y2K vulnerabilities. The NRC staff also

incorporated recognition of the Y2K concern in the updated Standard Review Plan (SRP), NUREG-0800, Chapter 7, "Instrumentation and Control," dated August 1997, which contains guidance for staff review of computer-based instrumentation and control systems.

At the Nuclear Utilities Software Management Group (NUSMG) Year 2000 Workshop, an industry workshop held in July 1997, nuclear power plant licensees described their Y2K programs, and gave examples of areas in which they addressed Y2K issues in order to ensure the safety and operability of their plants on January 1, 2000. Some of the issues discussed were the (1) evaluation of the impact of the Y2K problem on plant equipment, (2) assessment process involved in the identification of Y2K affected components, vendors, and interfaces, (3) development of Y2K testing strategies, and (4) identification of budget needs to address the Y2K problem.

The Nuclear Energy Institute (NEI) met with NUSMG and nuclear plant utility representatives in August 1997 to formulate an industry-wide plan to address the Y2K issue. On October 7, 1997, representatives of NEI and NUSMG met with the NRC staff to discuss actions NEI was taking to help utilities make their plants "Year 2000 ready." NEI was preparing a framework document with guidance for utility use in readying for the Year 2000. The framework document makes a distinction in terminology between "Y2K readiness" ("Y2K Ready" is defined as a computer system or application that has been determined to be suitable for continued use into the year 2000 even though the computer system or application is not fully Y2K Compliant) and "Y2K compliance" ("Y2K Compliant" is defined as computer systems or applications that accurately process date/time data (including but not limited to, calculating, comparing, and sequencing) from, into and between the twentieth and twenty-first centuries, the years 1999 and 2000, and leap-year calculations). NEI/NUSMG issued the framework document NEI/NUSMG 97-07, "Nuclear Utility Year 2000 Readiness" to all licensees in November 1997. The document recommends methods for nuclear utilities to attain Y2K readiness and thereby ensure that their facilities remain safe and continue to operate within the requirements of their license. The scope of NEI/NUSMG 97-07 covers software, or software-based systems or interfaces, whose failure (due to the Y2K problem) would (1) prevent the performance of the safety

function of a structure, system or component and (2) degrade, impair, or prevent operability of the nuclear facility.

Discussion

Diverse concerns are associated with the potential impact of the Y2K problem on nuclear power plants because of the variety and types of computer systems in use. Some of the concerns are the (1) scheduling of maintenance and technical specification surveillance requirements, (2) use and application of programmable logic controllers and other commercial off-the-shelf software and hardware, (3) operation of process control systems, (4) performance of engineering calculations, and (5) collection of operating and post-accident plant parameter data.

Some vendors have taken such actions as placing information on the Internet discussing which of their products are Y2K compliant, and how the vendor is addressing the Y2K problem with respect to specific products, including products purchased by their nuclear power plant customers. When addressing some of the particular issues associated with the use and application of software, it has been found that even if the application has no apparent date manipulation algorithms, it may still be affected by a Y2K related problem. For example, a subroutine that date stamps the header information in archival tapes regardless of the rest of the content of the tape may be affected. In addition, although individually several systems may be "date safe," the integrated operations that the systems support may be vulnerable to the Y2K problem. Further, there are potential impacts from the operating system supporting their instrumentation system's application software and from sub-programs (such as calibration and data recording/reporting) associated with the main application software.

One application which is common to all power reactor licensees is the link between plant computers and the NRC's Emergency Response Data System (ERDS). This application performs the communication and data transmission function which provide near real-time data availability to NRC and state incident response personnel during declared emergencies. The NRC is currently performing Y2K related upgrades to ERDS which will maintain the same communication protocol as the current system with the exception that either 2-digit or 4-digit year fields will be accepted. Those licensees that anticipate changes to their ERDS link should allow time in their schedules for retesting their systems. NRC contractors

will support requests for testing on a "first come, first served" basis.

NEI/NUSMG 97-07 suggests a strategy for developing and implementing a nuclear utility Y2K program. The strategy recognizes management, implementation, quality assurance, regulatory considerations, and documentation as the fundamental elements of a successful Y2K project. The document contains additional guidance for these fundamental elements. The recommended components for management planning are management awareness, sponsorship, project leadership, project objectives, project management team, management plan, project reports, interfaces, resources, oversight, and quality assurance. The suggested phases of implementation are awareness, initial assessment (which includes inventory, categorization, classification, prioritization, and analysis of initial assessment), detailed assessment (including vendor evaluation, utility-owned or -supported software evaluation, interface evaluation, remedial planning), remediation, Y2K testing and validation, and notification. The quality assurance (QA) measures apply to project management QA and implementation QA.

Regulatory considerations include the performance of appropriate reviews, reporting requirements, and documentation. Documentation of Y2K program activities and results includes documentation requirements, project management documentation, vendor documentation, inventory lists, checklists for initial and detailed assessments, and record retention. NEI/NUSMG 97-07 also contains examples of various plans and checklists as appendices.

The staff believes that the guidance in NEI/NUSMG 97-07, when properly implemented, will present an appropriate approach for licensees to address the Y2K problem at nuclear power plant facilities.

In the course of implementing the Y2K readiness program, problems could be identified that potentially impact the licensing basis of the plants. In certain cases, license amendments may be needed to address the problem resolution. Licensees should submit such license amendments to the NRC on a timely basis. The utility Y2K readiness programs and schedules should have the flexibility to accommodate such an eventuality. In addition, licensees are reminded that any changes to their facilities that impact their current licensing basis must be reviewed in accordance with existing NRC

requirements and the change properly documented.

Required Response

In order to gain the necessary assurance that addressees are effectively addressing the Y2K problem and are in compliance with the terms and conditions of their licenses and NRC regulations, the NRC staff requires that all addressees submit a written response to this generic letter as follows:

(1) Within 90 days of the date of this generic letter, submit a written response indicating whether or not you have pursued and are continuing to pursue a Y2K readiness program as outlined in NEI/NUSMG 97-07. If you are not conforming to the NEI/NUSMG guidance, present a brief description of the program(s) that have already been completed, are being conducted, or are planned to ensure Y2K readiness of the computer systems at your facility(ies). This response should address the program's scope, assessment process, and plans for corrective actions (including testing, and schedules).

(2) Upon completing your Y2K readiness program, or, in any event, no later than July 1, 1999, submit a written response confirming that your facility is Y2K ready and in compliance with the terms and conditions of your license(s) and NRC regulations. In addition, the response should contain a status report of work remaining to be done to complete your Y2K program, including completion schedules. ("Y2K Ready" is defined as a computer system or application that has been determined to be suitable for continued use into the year 2000 even though the computer system or application is not fully Y2K Compliant. "Y2K Compliant" is defined as computer systems or applications that accurately process date/time data (including but not limited to, calculating, comparing, and sequencing) from, into and between the twentieth and twenty-first centuries, the years 1999 and 2000, and leap-year calculations.)

Address the written reports to the U.S. Nuclear Regulatory Commission, Attention: Document Control Desk, Washington, D.C. 20555-0001, under oath or affirmation under the provisions of Section 182a, Atomic Energy Act 1954, as amended, and 10 CFR 50.54(f). In addition, submit a copy to the appropriate regional administrator.

Backfit Discussion

This generic letter only requests information from addressees under the provisions of Section 182a of the Atomic Energy Act of 1954, as amended, and 10 CFR 50.54(f). The requested

information will enable the staff to verify that each nuclear power plant licensee is implementing an effective plan to address the Y2K problem and provide for safe operation of the facility before January 1, 2000, and is in compliance with the terms and conditions of their license(s) and NRC regulations. The following NRC regulations are a basis for this request:

- 10 CFR 50.36, "Technical Specifications," paragraph (c)(3), "Surveillance requirements," and paragraph (c) (5), "Administrative controls." These relate, respectively, to requirements relating to test, calibration, or inspection to assure that the necessary quality of systems and components is maintained, and to provisions relating to management, procedures, record keeping, and review and audit necessary to assure operation of the facility in a safe manner.

- 10 CFR 50.47, "Emergency plans," paragraph (b)(8), which relates to the provision and maintenance of adequate emergency facilities and equipment to support the emergency responses.

- Appendix B to 10 CFR Part 50, Criterion III, "Design Control," requires that design control measures shall provide for verifying or checking the adequacy of design, such as by the performance of design reviews, by the use of alternate or simplified calculational methods, or by the performance of a suitable testing program.

- Appendix B to 10 CFR Part 50, Criterion XVII, "Quality Assurance Records," requires that sufficient records shall be maintained to furnish evidence of activities affecting quality. The records are to include, among others, operating logs and results of reviews.

- Appendix E to 10 CFR 50, Section VI, "Emergency Response Data System" which relates to the provision and maintenance of licensee links to the Emergency Response Data System.

In addition, the following requirements from Appendix A to 10 CFR part 50, "General Design Criteria for Nuclear Power Plants", also provide a basis for the request: (In the statement of consideration (SOC) for the amendment to 10 CFR part 50 which added Appendix A, "General Design Criteria for Nuclear Power Plants," published in the **Federal Register** on February 20, 1971, the Commission noted that the general design criteria added as Appendix A to Part 50 establish the minimum requirements for the principal design criteria for water-cooled nuclear power plants similar in design and location to plants for which construction permits have been issued

by the Commission. Principal design criteria established by an applicant and accepted by the Commission will be incorporated by reference in the construction permit. The SOC also notes that in considering the issuance of an operating license under part 50, the Commission will require assurance that these criteria have been satisfied in the detailed design and construction of the facility and any changes in such criteria are justified. It should be noted that a proposed Appendix A to 10 CFR part 50 was published in the **Federal Register** on July 11, 1967, and the comments and suggestions received in response to the notice of proposed rule making and subsequent developments in the technology and in the licensing process have been considered in developing the general design criteria.)

- Appendix A to 10 CFR part 50, General Design Criterion (GDC) 13, "Instrumentation and control," which addresses the provision of appropriate instrumentation and controls to monitor and control systems and variables during normal operation, anticipated operational occurrences, and accident conditions as appropriate to ensure adequate safety.

- Appendix A to 10 CFR part 50, GDC 19, "Control room," which requires the provision of a control room from which actions can be taken to operate the nuclear plant safely.

- Appendix A to 10 CFR part 50, GDC 23, "Protection system failure modes," which requires that the protection system shall be designed to fail into a safe state or into a state demonstrated to be acceptable on some other defined basis.

Dated at Rockville, Maryland, this 23rd day of January 1998.

For the Nuclear Regulatory Commission.

Jack W. Roe,

Acting Director, Division of Reactor Program Management, Office of Nuclear Reactor Regulation.

[FR Doc. 98-2182 Filed 1-28-98; 8:45 am]

BILLING CODE 7590-01-P

NUCLEAR REGULATORY COMMISSION

[Docket No. 40-8989; License No. SUA-1559]

Envirocare of Utah, Inc.; Notice of Receipt of Petition for Director's Decision Under 10 CFR 2.206

Notice is hereby given that by petition dated December 12, 1997, Mr. Thomas B. Cochran, Director of Nuclear Programs, Natural Resources Defense Council (NRDC) requested that the U.S.

Nuclear Regulatory Commission (NRC) take action with regard to Envirocare of Utah, Inc. (Envirocare). The Petitioner requests that the NRC: (1) Conduct an immediate investigation of issues raised in the Petition and immediately suspend Envirocare's NRC license; (2) conduct an investigation of possible criminal violations of section 223 of the Atomic Energy Act of 1954, as amended (the Act); (3) immediately suspend Envirocare's license with the State of Utah, under section 274j(2) of the Act; (4) investigate the adequacy of the State of Utah agreement state program to protect whistle blowers; (5) contact each current and former Envirocare employee personally, on a confidential basis, to advise them of their rights to inform the NRC of unsafe practices and violations, to inform them of the protections available to them, and to ask them if they have any information which they wish to disclose, on a confidential basis or otherwise; and (6) order a special independent review of Envirocare's relationships with its employees, along the lines of the review ordered by the NRC for the Millstone site.

As a basis for this request, the petitioner states that Envirocare's employee-related practices and contractual provisions constitute a violation of 42 U.S.C. 5851 and the NRC's whistle blower protection regulations under Parts 19 and 40 of Title 10 of the Code of Federal Regulations (i.e., 10 CFR 19.16, 19.20, and 40.7). Specifically, the petitioner states that current and former Envirocare employees who have provided to governmental authorities information adverse to Envirocare's interests fear for their lives and the lives of their families, should their identities become known to an officer of Envirocare. The petitioner also states that certain provisions in Envirocare's standard employment contract prevent its employees from disclosing to the NRC information concerning unsafe practices and violations under the NRC license and threaten them with severe financial penalties in the event of a disclosure.

The request for an investigation and the suspension of Envirocare's NRC license is being treated pursuant to 10 CFR 2.206 of the Commission's regulations. The request has been referred to the Director of the Office of Nuclear Material Safety and Safeguards. As provided by § 2.206, appropriate action will be taken on this petition within a reasonable time. By letter dated January 16, 1998, the Director denied the petitioner's request for immediate action concerning Envirocare's NRC license. A copy of the petition is

available for public inspection and copying at the NRC Public Document Room, in the Gelman Building, 2120 L Street NW., Washington, DC 20555.

Dated at Rockville, Maryland, this 16th day of January 1998.

For the Nuclear Regulatory Commission.

Carl J. Paperiello,

Director, Office of Nuclear Material Safety and Safeguards.

[FR Doc. 98-2178 Filed 1-28-98; 8:45 am]

BILLING CODE 7590-01-P

RAILROAD RETIREMENT BOARD

Proposed Collection; Comment Request

SUMMARY: In accordance with the requirement of Section 3506(c)(2)(A) of the Paperwork Reduction Act of 1995 which provides opportunity for public comment on new or revised data collections, the Railroad Retirement Board (RRB) will publish periodic summaries of proposed data collections.

Comments Are Invited On

(a) Whether the proposed information collection is necessary for the proper performance of the functions of the agency, including whether the information has practical utility; (b) the accuracy of the RRB's estimate of the burden of the collection of the information; (c) ways to enhance the quality, utility, and clarity of the information to be collected; and (d) ways to minimize the burden related to the collection of information on respondents, including the use of automated collection techniques or other forms of information technology.

Title and Purpose of Information Collection

Withholding Certificate for Railroad Retirement Monthly Annuity Payments; OMB 3220-0149.

The Internal Revenue Code requires all payers of tax liable private pensions to U.S. citizens to: (1) Notify each recipient at least concurrent with initial withholding that the payer is, in fact, withholding benefits for tax liability and that the recipient has the option of electing not to have the payer withhold, or to withhold at a specific rate; (2) withhold benefits for tax purposes (in the absence of the recipient's election not to withhold benefits); and (3) notify all beneficiaries, at least annually, that they have the option of changing their withholding status or elect not to have benefits withheld.

The Railroad Retirement Board provides Form RRB-W4P, Withholding Certificate for Railroad Retirement