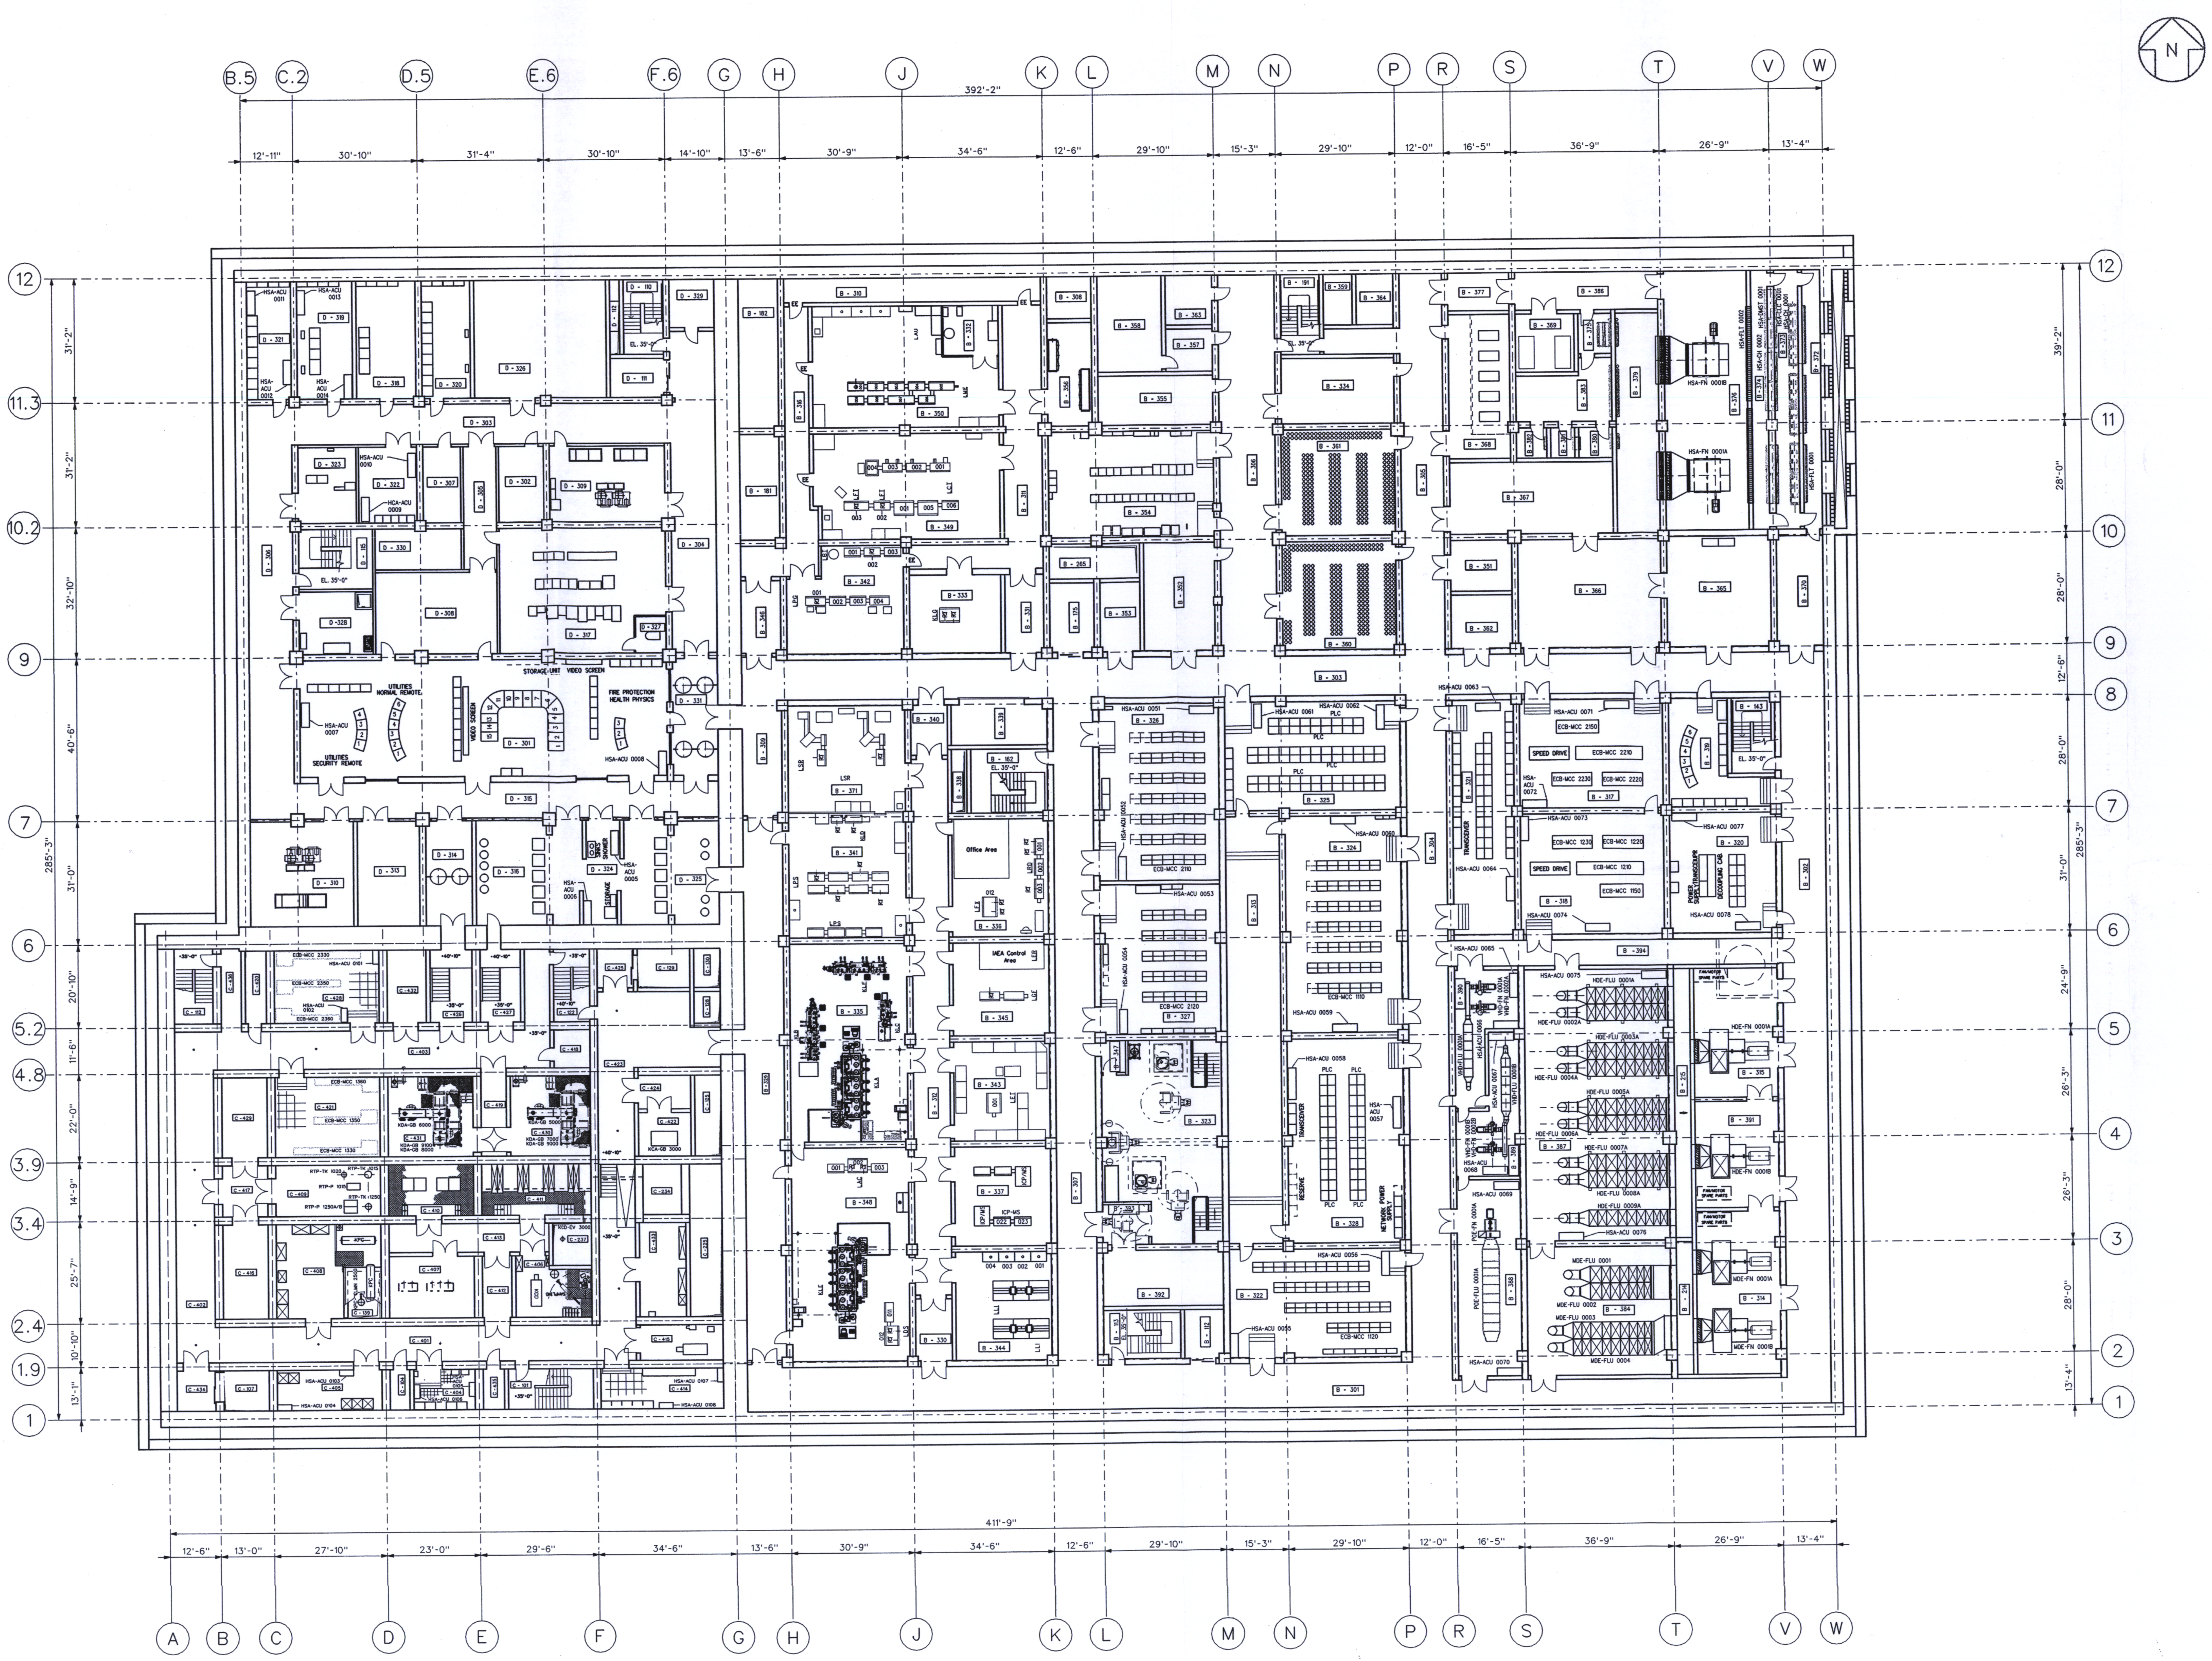

ROOM IDENTIFICATION				
NUMBER	DESIGNATION	CONFINEMENT ZONE		
B-301	PERSONNEL AND MATERIAL CORRIDOR	C2		
B-302	PERSONNEL AND MATERIAL CORRIDOR	C2		
B-303	PERSONNEL AND MATERIAL CORRIDOR	C2		
B-304	PERSONNEL AND MATERIAL CORRIDOR	C2		
B-305	PERSONNEL AND MATERIAL CORRIDOR	C2		
B-306	PERSONNEL AND MATERIAL CORRIDOR	C2		
B-307	PERSONNEL AND MATERIAL CORRIDOR	C2		
B-308	HVAC\UTILITY	C2		
B-309	PERSONNEL AND MATERIAL CORRIDOR	C2		
B-310	PERSONNEL AND MATERIAL CORRIDOR	C2		
B-311	AIR LOCK	C3b		
B-312	PERSONNEL AND MATERIAL CORRIDOR	C3b		
B-313	UTILITY CORRIDOR	C2		
B-314	MD FAN ROOM	C2		
B-315	HD FAN ROOM	C2		
B-316	AIR LOCK	C3b		
B-317	UTILITIES MCC. ROOM WAY 2	C2		
B-318	UTILITIES MCC. ROOM WAY 1	C2		
B-319	UTILITIES CONTROL ROOM	C2		
B-320	UTILITIES SECURITY ELCTRONIC ROOM	C2		
B-321	UTILITIES NORMAL ELECTRONIC ROOM	C2		
B-322	PELLET MCC ROOM WAY 1	C2		
B-323	UO2 RECEIVING ROOM	C3b		
B-324	POWDER MCC ROOM WAY 1	C2		
B-325	PELLET AREA ELECTRONICS ROOM	C2		
B-326	POWDER MCC ROOM WAY 2	C2		
B-327	PELLET MCC ROOM WAY 2	C2		
B-328	POWDER AREA ELECTRONICS ROOM	C2		
B-329	AIR LOCK	C3b		
B-330	AIR LOCK	C3b		
B-331	PERSONNEL AND MATERIAL CORRIDOR	C2		
B-332	AUTOCLAVES	C3b		
B-333	LIQUID SAMPLE STORAGE	C3b		
B-334	CHEMICAL PRODUCT STORAGE	C2		
B-335	POLISHING LABORATORY	C3b		
B-336	RECEPTION AND GAMMA-FX	C3b		
B-337	ICP-MS	C3b		
B-338	PLENUM	C2		
B-339	MATERIAL	C2		
B-340	AIR LOCK	C3b		
B-341	MASS SPECTROMETRY PREPARATIONS	C3b		
B-342	GAS PHYSICS	C3b		
B-343	CALIBRATION	C3b		
B-344	REAGENT PREPARATION	C3b		
B-345	LIQUID WASTE PROCESSING AND IAEA	C3b		
B-346	PERSONNEL AND MATERIAL CORRIDOR	C2		
B-347	AIR LOCK	C3b		
B-348	DISSOLUTION AND CHEMICAL	C3b		
B-349	TEST LINE	C3b		
B-350	CERAMOGRAPHY AND METALLOGRAPHY	C3b		
B-351	EMERGENCY TRAIN B ELECTRONIC ROOM	C2		
B-352	RAD CONTROL LAB	C2		
B-353	ELECTRICAL ROOM	C2		
B-354	WEAK CURRENTS AND RAD CONTROL ELECTRICAL ROOM	C2		
B-355	COMPUTER ROOM	C2		
B-356	INTERMEDIATE FILTER ROOM	C3b		
B-357	X RAY READING	C2		
B-358	DARK ROOM	C2		
B-359	UTILITY CHASE	C2		
B-360	CO2 BOTTLE STORAGE	C2		
B-361	LABORATORY GAS STORAGE	C2		
B-362	EMERGENCY TRAIN A ELECTRONIC ROOM	C2		
B-363	OFFICE	C2		
B-364	HVAC UTILITY CHASE	C2		
B-365	CHEMICAL PRODUCT STORAGE	C2		
B-366	MECHANICAL AND ELECTRICAL FACILITY	C2		
B-367	AIR ROOM	C2		
B-368	CHILLED WATER PUMP ROOM	C2		
B-369	CHILLED WATER	C2		
B-370	AIR LOCK	C2		
B-371	MASS SPECTROMETRY ANALYSIS	C3b		
B-372	PRE-FILTERS	C1		
B-373	COILS (PRE-HEATING AND COOLING)	C1		
B-374	FINE FILTERS AND HEATING COILS	C1		
B-375	PLENUM "A"	C2		
B-376	FAN 1 AND 2	C2		
B-377	AIR LOCK FOR PRESSURE DIFFERENTIAL	C2		
B-				
B-379	SUPPLY PLENUM "B"	C2		
B-380	COOLING COILS	C2		
B-381	POST HEATING COIL	C2		
B-382	"PO" SUPPLY PLENUM	C2		
B-383	PLENUM "B"	C2		
B-384	MD FILTERS	C2		
B-386	PERSONNEL AND MATERIAL CORRIDOR	C2		
B-387	HD FILTERS	C2		
B-388	PO FILTER ROOM	C2		
B-389	VHD FAN	C2		
B-390	VHD FAN	C2		
B-391	HD FAN ROOM	C2		
B-392	UO2 INTERMEDIATE STORAGE	C2		
B-393	MATERIAL AIR LOCK	C3b		
B-394	PERSONNEL AND MATERIAL CORRIDOR	C2		
D-301	POLISHING CONTROL ROOM	C2		
D-302	SPARE	C2		
D-303	PERSONNEL AND MATERIAL CORRIDOR	C2		
D-304	PERSONNEL AND MATERIAL CORRIDOR	C2		
D-305	PERSONNEL AND MATERIAL CORRIDOR	C2		
D-306	PERSONNEL AND MATERIAL CORRIDOR	C2		
D-307	OFFICE	C2		
D-308	OFFICE	C2		
D-309	EMERGENCY HVAC CONTROL ROOM TRAIN A	C2		
D-310	EMERGENCY HVAC CONTROL ROOM TRAIN B	C2		
D-313	HP OFFICE	C2		
D-314	CORRIDOR/AIRLOCK	C2		
D-315	PERSONNEL AND MATERIAL CORRIDOR	C2		
D-316	RAD MONITORS/AIRLOCK	C2		
D-317	COMPUTER ROOM	C2		
D-318	EMERGENCY TRAIN A - CONTROL ROOM	C2		
D-319	EMERGENCY TRAIN B - CONTROL ROOM	C2		
D-320	EMERGENCY TRAIN A - ELECTRONIC ROOM RELAY	C2		
D-321	EMERGENCY TRAIN B - ELECTRONIC ROOM RELAY	C2		
D-322	WEAK CURRENTS - FIRE PROTECTION	C2		
D-323	WEAK CURRENTS - SAFEGUARDS	C2		
D-324	CONTAMINATED FIRST AID/AIRLOCK	C2		
D-325	RAD MONITORS/AIRLOCK	C2		
D-326	CENTRAL ALARM STATION	C2		
D-327	ENGINEER OFFICE	C2		
D-328	SPARE	C2		
D-329	STORAGE	C2		
D-330	HVAC UTILITY CHASE	C2		
D-331	AIRLOCK	C2		

BAP ROOMS (C-XXX) ARE SHOWN ON BAP PLAN DRAWINGS.

Figure 11.1-18 MFFF Processing Area Process Conceptual Layout Level 3 (Elevation 40'-10")

D-11