

Retyped ITS Bases (2.0 – 3.3) – Vol. 3

B 2.0 SAFETY LIMITS (SLs)

B 2.1.1 Reactor Core SLs

BASES

BACKGROUND

JAFNPP design criteria (Ref. 1) requires, and SLs ensure, that specified acceptable fuel design limits are not exceeded during steady state operation, normal operational transients, and abnormal operational transients.

The fuel cladding integrity SL is set such that no significant fuel damage is calculated to occur if the limit is not violated. Because fuel damage is not directly observable, a stepback approach is used to establish an SL, such that the MCPR is not less than the limit specified in Specification 2.1.1.2. MCPR greater than the specified limit represents a conservative margin relative to the conditions required to maintain fuel cladding integrity.

The fuel cladding is one of the physical barriers that separate the radioactive materials from the environs. The integrity of this cladding barrier is related to its relative freedom from perforations or cracking. Although some corrosion or use related cracking may occur during the life of the cladding, fission product migration from this source is incrementally cumulative and continuously measurable. Fuel cladding perforations, however, can result from thermal stresses, which occur from reactor operation significantly above design conditions.

While fission product migration from cladding perforation is just as measurable as that from use related cracking, the thermally caused cladding perforations signal a threshold beyond which still greater thermal stresses may cause gross, rather than incremental, cladding deterioration. Therefore, the fuel cladding SL is defined with a margin to the conditions that would produce onset of transition boiling (i.e., MCPR = 1.00). These conditions represent a significant departure from the condition intended by design for planned operation. The MCPR fuel cladding integrity SL ensures that during normal operation and during abnormal operational transients, at least 99.9% of the fuel rods in the core do not experience transition boiling.

(continued)

BASES

BACKGROUND
(continued)

Operation above the boundary of the nucleate boiling regime could result in excessive cladding temperature because of the onset of transition boiling and the resultant sharp reduction in heat transfer coefficient. Inside the steam film, high cladding temperatures are reached, and a cladding water (zirconium water) reaction may take place. This chemical reaction results in oxidation of the fuel cladding to a structurally weaker form. This weaker form may lose its integrity, resulting in an uncontrolled release of fission products to the reactor coolant.

The reactor vessel water level SL ensures that adequate core cooling capability is maintained during all MODES of reactor operation. Establishment of Emergency Core Cooling System initiation setpoints higher than this safety limit provides margin such that the safety limit will not be reached or exceeded.

APPLICABLE
SAFETY ANALYSES

The fuel cladding must not sustain damage as a result of normal operation and abnormal operational transients. The reactor core SLs are established to preclude violation of the fuel design criterion that a MCPR limit is to be established, such that at least 99.9% of the fuel rods in the core would not be expected to experience the onset of transition boiling.

The Reactor Protection System setpoints (LCO 3.3.1.1, "Reactor Protection System (RPS) Instrumentation"), in combination with the other LCOs, are designed to prevent any anticipated combination of transient conditions for Reactor Coolant System water level, pressure, and THERMAL POWER level that would result in reaching the MCPR limit.

2.1.1.1 Fuel Cladding Integrity

GE critical power correlations are applicable for all critical power calculations at pressures \geq 785 psig and core flows \geq 10% of rated flow. For operation at low pressures or low flows, another basis is used, as follows:

Since the pressure drop in the bypass region is essentially all elevation head, the core pressure drop at low power and flows will always be

(continued)

BASES

APPLICABLE
SAFETY ANALYSES

2.1.1.1 Fuel Cladding Integrity (continued)

> 4.5 psi. Analyses (Ref. 2) show that with a bundle flow of 28×10^3 lb/hr, bundle pressure drop is nearly independent of bundle power and has a value of 3.5 psi. Thus, the bundle flow with a 4.5 psi driving head will be $> 28 \times 10^3$ lb/hr. Full scale ATLAS test data taken at pressures from 14.7 psia to 800 psia indicate that the fuel assembly critical power at this flow is approximately 3.35 Mwt. With the design peaking factors, this corresponds to a THERMAL POWER > 50% RTP. Thus, a THERMAL POWER limit of 25% RTP for reactor pressure < 785 psig is conservative.

2.1.1.2 MCPR

The fuel cladding integrity SL is set such that no significant fuel damage is calculated to occur if the limit is not violated. Since the parameters that result in fuel damage are not directly observable during reactor operation, the thermal and hydraulic conditions that result in the onset of transition boiling have been used to mark the beginning of the region in which fuel damage could occur. Although it is recognized that the onset of transition boiling would not result in damage to BWR fuel rods, the critical power at which boiling transition is calculated to occur has been adopted as a convenient limit. However, the uncertainties in monitoring the core operating state and in the procedures used to calculate the critical power result in an uncertainty in the value of the critical power. Therefore, the fuel cladding integrity SL is defined as the critical power ratio in the limiting fuel assembly for which more than 99.9% of the fuel rods in the core are expected to avoid boiling transition, considering the power distribution within the core and all uncertainties.

The MCPR SL is determined using a statistical model that combines all the uncertainties in operating parameters and the procedures used to calculate critical power. The probability of the occurrence of boiling transition is determined using the approved General Electric Critical

(continued)

BASES

APPLICABLE
SAFETY ANALYSES

2.1.1.2 MCPR (continued)

Power correlations. Details of the fuel cladding integrity SL calculation are given in Reference 2. Reference 2 also includes a tabulation of the uncertainties used in the determination of the MCPR SL and of the nominal values of the parameters used in the MCPR SL statistical analysis.

2.1.1.3 Reactor Vessel Water Level

The reactor vessel water level is required to be above the top of the active irradiated fuel. The top of the active irradiated fuel is the top of a 150 inch fuel column which includes both the enriched and the natural uranium. During MODES 1 and 2 the reactor vessel water level is required to be above the top of the active irradiated fuel to provide core cooling capability. With fuel in the reactor vessel during periods when the reactor is shut down, consideration must be given to water level requirements due to the effect of decay heat. If the water level should drop below the top of the active irradiated fuel during this period, the ability to remove decay heat is reduced. This reduction in cooling capability could lead to elevated cladding temperatures and clad perforation in the event that the water level becomes $< 2/3$ of the core height (Ref. 3). The reactor vessel water level SL has been established at the top of the active irradiated fuel to provide a point that can be monitored and to also provide adequate margin for effective action.

SAFETY LIMITS

The reactor core SLs are established to protect the integrity of the fuel clad barrier to prevent the release of radioactive materials to the environs. SL 2.1.1.1 and SL 2.1.1.2 ensure that the core operates within the fuel design criteria. SL 2.1.1.3 ensures that the reactor vessel water level is greater than the top of the active irradiated fuel in order to prevent elevated clad temperatures and resultant clad perforations.

APPLICABILITY

SLs 2.1.1.1, 2.1.1.2, and 2.1.1.3 are applicable in all MODES.

(continued)

RA12.0-7

BASES (continued)

SAFETY LIMIT
VIOLATIONS

Exceeding a SL may cause fuel damage and create a potential for radioactive releases in excess of 10 CFR 100, "Reactor Site Criteria," limits (Ref. 4). Therefore, it is required to insert all insertable control rods and restore compliance with the SLs within 2 hours. The 2 hour Completion Time ensures that the operators take prompt remedial action and also ensures that the probability of an accident occurring during this period is minimal.

REFERENCES

1. UFSAR, Section 16.6.
 2. NEDE-24011-P-A-13, General Electric Standard Application for Reactor Fuel, August 1996.
 3. NEDC-31317P, Revision 2, James A. FitzPatrick Nuclear Power Plant SAFER/GESTR-LOCA, Loss of Coolant Accident Analysis, April 1993.
 4. 10 CFR 100.
-
-

EDITS

B 2.0 SAFETY LIMITS (SLs)

B 2.1.2 Reactor Coolant System (RCS) Pressure SL

BASES

BACKGROUND

The SL on reactor steam dome pressure protects the RCS against overpressurization. In the event of fuel cladding failure, fission products are released into the reactor coolant. The RCS then serves as the primary barrier in preventing the release of fission products into the atmosphere. Establishing an upper limit on reactor steam dome pressure ensures continued RCS integrity. According to JAFNPP design criteria (Ref. 1), the reactor coolant pressure boundary (RCPB) shall be designed with sufficient margin to ensure that the design conditions are not exceeded during normal operation and abnormal operational transients.

During normal operation and abnormal operational transients, RCS pressure is limited from exceeding the design pressure by more than 10%, in accordance with Section III of the ASME Code (Ref. 2). To ensure system integrity, all RCS components are hydrostatically tested at 125% of design pressure, in accordance with ASME Code requirements, prior to initial operation when there is no fuel in the core. Any further hydrostatic testing with fuel in the core may be done under LCO 3.10.1, "Inservice Leak and Hydrostatic Testing Operation." Following inception of unit operation, RCS components shall be pressure tested in accordance with the requirements of ASME Code, Section XI (Ref. 3).

Overpressurization of the RCS could result in a breach of the RCPB, reducing the number of protective barriers designed to prevent radioactive releases from exceeding the limits specified in 10 CFR 100, "Reactor Site Criteria" (Ref. 4). If this occurred in conjunction with a fuel cladding failure, fission products could enter the containment atmosphere.

(continued)

BASES (continued)

APPLICABLE SAFETY ANALYSES The RCS safety/relief valves and the Reactor Protection System Reactor Vessel Steam Dome Pressure-High Function have settings established to ensure that the RCS pressure SL will not be exceeded.

The RCS pressure SL has been selected such that it is at a pressure below which it can be shown that the integrity of the system is not endangered. The reactor pressure vessel is designed to Section III of the ASME, Boiler and Pressure Vessel Code, 1965 Edition including Addenda through the winter of 1966 (Ref. 5), which permits a maximum pressure transient of 110%, 1375 psig, of design pressure 1250 psig. The SL of 1325 psig, as measured in the reactor steam dome, is equivalent to 1375 psig at the lowest elevation of the RCS. The RCS is designed to the USAS Nuclear Power Piping Code, Section B31.1.0, 1967 Edition, including Addendum A through 1969 (Ref. 6), for the reactor recirculation piping, which permits a maximum pressure transient of 120% of design pressures of 1148 psig for suction piping and 1274 psig for discharge piping. The RCS pressure SL is selected to be the lowest transient overpressure allowed by the applicable codes.

SAFETY LIMITS The maximum transient pressure allowable in the RCS pressure vessel under the ASME Code, Section III, is 110% of design pressure. The maximum transient pressure allowable in the RCS piping, valves, and fittings is 120% of design pressures of 1148 psig for suction piping and 1274 psig for discharge piping. The most limiting of these allowances is the 110% of the reactor pressure vessel design pressure; therefore, the SL on maximum allowable RCS pressure is established at 1325 psig as measured at the reactor steam dome.

APPLICABILITY SL 2.1.2 applies in all MODES.

(continued)

BASES (continued)

SAFETY LIMIT
VIOLATIONS

Exceeding the RCS pressure SL may cause immediate RCS failure and create a potential for radioactive releases in excess of 10 CFR 100, "Reactor Site Criteria," limits (Ref. 4). Therefore, it is required to insert all insertable control rods and restore compliance with the SL within 2 hours. The 2 hour Completion Time ensures that the operators take prompt remedial action and also assures that the probability of an accident occurring during this period is minimal.

REFERENCES

1. UFSAR, Section 16.6.
 2. ASME, Boiler and Pressure Vessel Code, Section III, Article NB-7000.
 3. ASME, Boiler and Pressure Vessel Code, Section XI, Article IWA-5000.
 4. 10 CFR 100.
 5. ASME, Boiler and Pressure Vessel Code, Section III, 1965 Edition, Addenda winter of 1966.
 6. ASME, USAS, Nuclear Power Piping Code, Section B31.1.0, 1967 Edition, with Addendum A, 1969.
-
-

B 3.0 LIMITING CONDITION FOR OPERATION (LCO) APPLICABILITY

BASES

LCOs LCO 3.0.1 through LCO 3.0.7 establish the general requirements applicable to all Specifications in Sections 3.1 through 3.10 and apply at all times, unless otherwise stated.

LCO 3.0.1 LCO 3.0.1 establishes the Applicability statement within each individual Specification as the requirement for when the LCO is required to be met (i.e., when the plant is in the MODES or other specified conditions of the Applicability statement of each Specification).

LCO 3.0.2 LCO 3.0.2 establishes that upon discovery of a failure to meet an LCO, the associated ACTIONS shall be met. The Completion Time of each Required Action for an ACTIONS Condition is applicable from the point in time that an ACTIONS Condition is entered. The Required Actions establish those remedial measures that must be taken within specified Completion Times when the requirements of an LCO are not met. This Specification establishes that:

- a. Completion of the Required Actions within the specified Completion Times constitutes compliance with a Specification; and
- b. Completion of the Required Actions is not required when an LCO is met within the specified Completion Time, unless otherwise specified.

There are two basic types of Required Actions. The first type of Required Action specifies a time limit in which the LCO must be met. This time limit is the Completion Time to restore an inoperable system or component to OPERABLE status or to restore variables to within specified limits. If this type of Required Action is not completed within the specified Completion Time, a shutdown may be required to place the plant in a MODE or condition in which the Specification is not applicable. (Whether stated as a Required Action or not, correction of the entered Condition is an action that may always be considered upon entering

(continued)

BASES

LCO 3.0.2
(continued)

ACTIONS.) The second type of Required Action specifies the remedial measures that permit continued operation of the plant that is not further restricted by the Completion Time. In this case, compliance with the Required Actions provides an acceptable level of safety for continued operation.

Completing the Required Actions is not required when an LCO is met or is no longer applicable, unless otherwise stated in the individual Specifications.

The nature of some Required Actions of some Conditions necessitates that, once the Condition is entered, the Required Actions must be completed even though the associated Condition no longer exists. The individual LCO's ACTIONS specify the Required Actions where this is the case. An example of this is in LCO 3.4.9, "RCS Pressure and Temperature (P/T) Limits."

The Completion Times of the Required Actions are also applicable when a system or component is removed from service intentionally. The reasons for intentionally relying on the ACTIONS include, but are not limited to, performance of Surveillances, preventive maintenance, corrective maintenance, or investigation of operational problems. Entering ACTIONS for these reasons must be done in a manner that does not compromise safety. Intentional entry into ACTIONS should not be made for operational convenience. Additionally, if intentional entry into ACTIONS would result in redundant equipment being inoperable, alternatives should be used instead. Doing so limits the time both subsystems/divisions of a safety function are inoperable and limits the time conditions exist which may result in LCO 3.0.3 being entered. Individual Specifications may specify a time limit for performing an SR when equipment is removed from service or bypassed for testing. In this case, the Completion Times of the Required Actions are applicable when this time limit expires, if the equipment remains removed from service or bypassed.

When a change in MODE or other specified condition is required to comply with Required Actions, the plant may enter a MODE or other specified condition in which another Specification becomes applicable. In this case, the Completion Times of the associated Required Actions would apply from the point in time that the new Specification becomes applicable and the ACTIONS Condition(s) are entered.

(continued)

BASES

LCO 3.0.3

LCO 3.0.3 establishes the actions that must be implemented when an LCO is not met and:

- a. An associated Required Action and Completion Time is not met and no other Condition applies; or
- b. The condition of the plant is not specifically addressed by the associated ACTIONS. This means that no combination of Conditions stated in the ACTIONS can be made that exactly corresponds to the actual condition of the plant. Sometimes, possible combinations of Conditions are such that entering LCO 3.0.3 is warranted; in such cases, the ACTIONS specifically state a Condition corresponding to such combinations and also that LCO 3.0.3 be entered immediately.

This Specification delineates the time limits for placing the plant in a safe MODE or other specified condition when operation cannot be maintained within the limits for safe operation as defined by the LCO and its ACTIONS. It is not intended to be used as an operational convenience that permits routine voluntary removal of redundant systems or components from service in lieu of other alternatives that would not result in redundant systems or components being inoperable.

Upon entering LCO 3.0.3, 1 hour is allowed to prepare for an orderly shutdown before initiating a change in plant operation. This includes time to permit the operator to coordinate the reduction in electrical generation with the load dispatcher to ensure the stability and availability of the electrical grid. The time limits specified to reach lower MODES of operation permit the shutdown to proceed in a controlled and orderly manner that is well within the specified maximum cooldown rate and within the capabilities of the plant, assuming that only the minimum required equipment is OPERABLE. This reduces thermal stresses on components of the Reactor Coolant System and the potential for a plant upset that could challenge safety systems under conditions to which this Specification applies. The use and interpretation of specified times to complete the actions of LCO 3.0.3 are consistent with the discussion of Section 1.3, Completion Times. A plant shutdown required in accordance with LCO 3.0.3 may be terminated and LCO 3.0.3 exited if any

(continued)

BASES

LCO 3.0.3
(continued)

of the following occurs:

- a. The LCO is now met.
- b. A Condition exists for which the Required Actions have now been performed.
- c. ACTIONS exist that do not have expired Completion Times. These Completion Times are applicable from the point in time that the Condition is initially entered and not from the time LCO 3.0.3 is exited.

The time limits of Specification 3.0.3 allow 37 hours for the plant to be in MODE 4 when a shutdown is required during MODE 1 operation. If the plant is in a lower MODE of operation when a shutdown is required, the time limit for reaching the next lower MODE applies. If a lower MODE is reached in less time than allowed, however, the total allowable time to reach MODE 4, or other applicable MODE, is not reduced. For example, if MODE 2 is reached in 2 hours, then the time allowed for reaching MODE 3 is the next 11 hours, because the total time for reaching MODE 3 is not reduced from the allowable limit of 13 hours. Therefore, if remedial measures are completed that would permit a return to MODE 1, a penalty is not incurred by having to reach a lower MODE of operation in less than the total time allowed.

In MODES 1, 2, and 3, LCO 3.0.3 provides actions for Conditions not covered in other Specifications. The requirements of LCO 3.0.3 do not apply in MODES 4 and 5 because the plant is already in the most restrictive Condition required by LCO 3.0.3. The requirements of LCO 3.0.3 do not apply in other specified conditions of the Applicability (unless in MODE 1, 2, or 3) because the ACTIONS of individual Specifications sufficiently define the remedial measures to be taken.

Exceptions to LCO 3.0.3 are provided in instances where requiring a plant shutdown, in accordance with LCO 3.0.3, would not provide appropriate remedial measures for the associated condition of the plant. An example of this is in LCO 3.7.7, "Spent Fuel Storage Pool Water Level." LCO 3.7.7 has an Applicability of "During movement of irradiated fuel assemblies in the spent fuel storage pool." Therefore, this LCO can be applicable in any or all MODES. If the LCO and the Required Actions of LCO 3.7.7 are not met while in

(continued)

BASES

LCO 3.0.3
(continued)

MODE 1, 2, or 3, there is no safety benefit to be gained by placing the plant in a shutdown condition. The Required Action of LCO 3.7.7 to "Suspend movement of irradiated fuel assemblies in the spent fuel storage pool" is the appropriate Required Action to complete in lieu of the actions of LCO 3.0.3. These exceptions are addressed in the individual Specifications.

LCO 3.0.4

LCO 3.0.4 establishes limitations on changes in MODES or other specified conditions in the Applicability when an LCO is not met. It precludes placing the plant in a MODE or other specified condition stated in that Applicability (e.g., Applicability desired to be entered) when the following exist:

- a. Plant conditions are such that the requirements of the LCO would not be met in the Applicability desired to be entered; and
- b. Continued noncompliance with the LCO requirements, if the Applicability were entered, would result in the plant being required to exit the Applicability desired to be entered to comply with the Required Actions.

Compliance with Required Actions that permit continued operation of the plant for an unlimited period of time in a MODE or other specified condition provides an acceptable level of safety for continued operation. This is without regard to the status of the plant before or after the MODE change. Therefore, in such cases, entry into a MODE or other specified condition in the Applicability may be made in accordance with the provisions of the Required Actions. The provisions of this Specification should not be interpreted as endorsing the failure to exercise the good practice of restoring systems or components to OPERABLE status before entering an associated MODE or other specified condition in the Applicability.

The provisions of LCO 3.0.4 shall not prevent changes in MODES or other specified conditions in the Applicability that are required to comply with ACTIONS. In addition, the provisions of LCO 3.0.4 shall not prevent changes in MODES or other specified conditions in the Applicability that result from any plant shutdown.

(continued)

BASES

LCO 3.0.4
(continued)

Exceptions to LCO 3.0.4 are stated in the individual Specifications. The exceptions allow entry into MODES or other specified conditions in the Applicability when the associated ACTIONS to be entered do not provide for continued operation for an unlimited period of time. Exceptions may apply to all the ACTIONS or to a specific Required Action of a Specification.

Surveillances do not have to be performed on the associated inoperable equipment (or on variables outside the specified limits), as permitted by SR 3.0.1. Therefore, changing MODES or other specified conditions while in an ACTIONS Condition, either in compliance with LCO 3.0.4 or where an exception to LCO 3.0.4 is stated, is not a violation of SR 3.0.1 or SR 3.0.4 for those Surveillances that do not have to be performed due to the associated inoperable equipment. However, SRs must be met to ensure OPERABILITY prior to declaring the associated equipment OPERABLE (or variable within limits) and restoring compliance with the affected LCO.

LCO 3.0.4 is only applicable when entering MODE 3 from MODE 4, MODE 2 from MODE 3, 4, or 5, or MODE 1 from MODE 2. Furthermore, LCO 3.0.4 is applicable when entering any other specified condition in the Applicability only while operating in MODE 1, 2, or 3. The requirements of LCO 3.0.4 do not apply in MODES 4 and 5, or in other specified conditions of the Applicability (unless in MODE 1, 2, or 3) because the ACTIONS of individual specifications sufficiently define the remedial measures to be taken.

LCO 3.0.5

LCO 3.0.5 establishes the allowance for restoring equipment to service under administrative controls when it has been removed from service or declared inoperable to comply with ACTIONS. The sole purpose of this Specification is to provide an exception to LCO 3.0.2 (e.g., to not comply with the applicable Required Action(s)) to allow the performance of required testing to demonstrate:

- a. The OPERABILITY of the equipment being returned to service; or
- b. The OPERABILITY of other equipment.

(continued)

BASES

LCO 3.0.6
(continued)

potential confusion and inconsistency of requirements related to the entry into multiple support and supported systems' LCO's Conditions and Required Actions are eliminated by providing all the actions that are necessary to ensure the plant is maintained in a safe condition in the support system's Required Actions.

However, there are instances where a support system's Required Action may either direct a supported system to be declared inoperable or direct entry into Conditions and Required Actions for the supported system. This may occur immediately or after some specified delay to perform some other Required Action. Regardless of whether it is immediate or after some delay, when a support system's Required Action directs a supported system to be declared inoperable or directs entry into Conditions and Required Actions for a supported system, the applicable Conditions and Required Actions shall be entered in accordance with LCO 3.0.2.

Specification 5.5.12, "Safety Function Determination Program (SFDP)," ensures loss of safety function is detected and appropriate actions are taken. Upon entry into LCO 3.0.6, an evaluation shall be made to determine if loss of safety function exists. Additionally, other limitations, remedial actions, or compensatory actions may be identified as a result of the support system inoperability and corresponding exception to entering supported system Conditions and Required Actions. The SFDP implements the requirements of LCO 3.0.6.

Cross division checks to identify a loss of safety function for those support systems that support safety systems are required. The cross division check verifies that the supported systems of the redundant OPERABLE support system are OPERABLE, thereby ensuring safety function is retained. A loss of safety function may exist when a support system is inoperable, and:

- a. A required system redundant to system(s) supported by the inoperable support system is also inoperable (EXAMPLE B3.0.6-1); or
- b. A required system redundant to system(s) in turn supported by the inoperable supported system is also inoperable (EXAMPLE B3.0.6-2); or

edit

edit

(continued)

BASES

LCO 3.0.6
(continued)

- c. A required system redundant to support system(s) for the supported systems (a) and (b) above is also inoperable (EXAMPLE B3.0.6-3).

edit

EXAMPLE B3.0.6-1

If System 2 of Division A is inoperable, and System 5 of Division B is inoperable, a loss of safety function exists in supported System 5.

EXAMPLE B3.0.6-2


If System 2 of Division A is inoperable, and System 11 of Division B is inoperable, a loss of safety function exists in System 11 which in turn is supported by System 5.

EXAMPLE B3.0.6-3

If System 2 of Division A is inoperable, and System 1 of Division B is inoperable, a loss of safety function exists in Systems 2, 4, 5, 8, 9, 10 and 11.

If this evaluation determines that a loss of safety function exists, the appropriate Conditions and Required Actions of the LCO in which the loss of safety function exists are required to be entered.

EXAMPLES

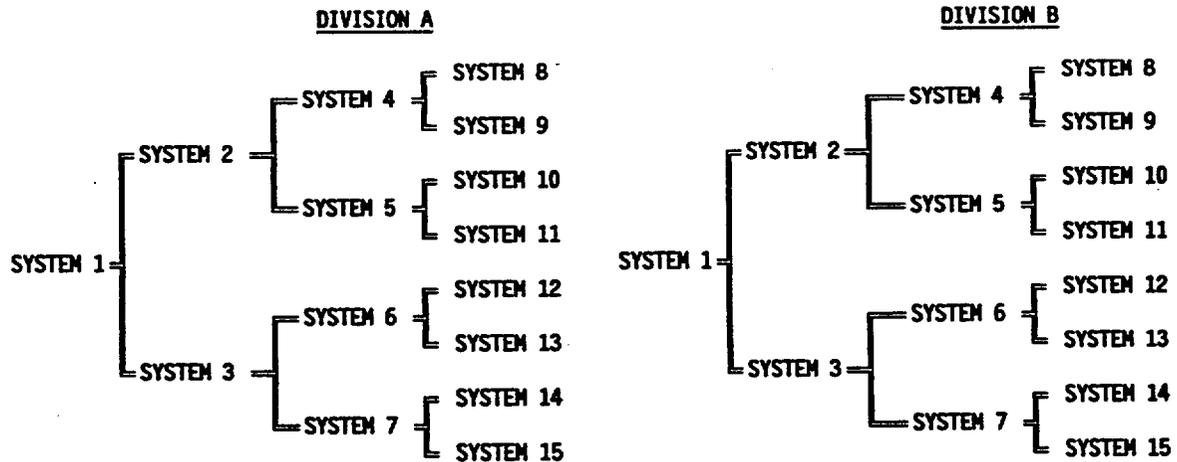

(continued)

BASES

**LCO 3.0.6
(continued)**

This loss of safety function does not require the assumption of additional single failures or loss of offsite power. Since operations is being restricted in accordance with the ACTIONS of the support system, any resulting temporary loss of redundancy or single failure protection is taken into account. Similarly, the ACTIONS for inoperable offsite circuit(s) and inoperable diesel generator(s) provide the necessary restriction for cross train inoperabilities. This explicit cross train verification for inoperable AC electrical power sources also acknowledges that supported system(s) are not declared inoperable solely as a result of inoperability of a normal or emergency electrical power source (refer to the definition of OPERABILITY).

When loss of safety function is determined to exist, and the SFDP requires entry into the appropriate Conditions and Required Actions of the LCO in which the loss of safety function exists, consideration must be given to the specific type of function affected. Where a loss of function is solely due to a single Technical Specification support system (e.g., loss of automatic start due to inoperable instrumentation, or loss of pump suction source due to low tank level) the appropriate LCO is the LCO for the support system. The ACTIONS for a support system LCO adequately addresses the inoperabilities of that system without reliance on entering its supported system LCO. When the loss of function is the result of multiple support systems, the appropriate LCO is the LCO for the supported system.

TSTF-273

LCO 3.0.7

There are certain special tests and operations required to be performed at various times over the life of the plant. These special tests and operations are necessary to demonstrate select plant performance characteristics, to perform special maintenance activities, and to perform special evolutions. Special Operations LCOs in Section 3.10 allow specified TS requirements to be changed to permit performances of these special tests and operations, which otherwise could not be performed if required to comply with the requirements of these TS. Unless otherwise specified, all the other TS requirements remain unchanged. This will ensure all appropriate requirements of the MODE or other specified condition not directly associated with or required to be changed to perform the special test or operation will remain in effect.

(continued)

BASES

**LCO 3.0.7
(continued)**

The Applicability of a Special Operations LCO represents a condition not necessarily in compliance with the normal requirements of the TS. Compliance with Special Operations LCOs is optional. A special operation may be performed either under the provisions of the appropriate Special Operations LCO or under the other applicable TS requirements. If it is desired to perform the special operation under the provisions of the Special Operations LCO, the requirements of the Special Operations LCO shall be followed. When a Special Operations LCO requires another LCO to be met, only the requirements of the LCO statement are required to be met regardless of that LCO's Applicability (i.e., should the requirements of this other LCO not be met, the ACTIONS of the Special Operations LCO apply, not the ACTIONS of the other LCO). However, there are instances where the Special Operations LCO's ACTIONS may direct the other LCO's ACTIONS be met. The Surveillances of the other LCO are not required to be met, unless specified in the Special Operations LCO. If conditions exist such that the Applicability of any other LCO is met, all the other LCO's requirements (ACTIONS and SRs) are required to be met concurrent with the requirements of the Special Operations LCO.

B 3.0 SURVEILLANCE REQUIREMENT (SR) APPLICABILITY

BASES

SRs SR 3.0.1 through SR 3.0.4 establish the general requirements applicable to all Specifications in Sections 3.1 through 3.10 and apply at all times, unless otherwise stated.

SR 3.0.1 SR 3.0.1 establishes the requirement that SRs must be met during the MODES or other specified conditions in the Applicability for which the requirements of the LCO apply, unless otherwise specified in the individual SRs. This Specification is to ensure that Surveillances are performed to verify the OPERABILITY of systems and components, and that variables are within specified limits. Failure to meet a Surveillance within the specified Frequency, in accordance with SR 3.0.2, constitutes a failure to meet an LCO.

Systems and components are assumed to be OPERABLE when the associated SRs have been met. Nothing in this Specification, however, is to be construed as implying that systems or components are OPERABLE when:

- a. The systems or components are known to be inoperable, although still meeting the SRs; or
- b. The requirements of the Surveillance(s) are known to be not met between required Surveillance performances.

Surveillances do not have to be performed when the plant is in a MODE or other specified condition for which the requirements of the associated LCO are not applicable, unless otherwise specified. The SRs associated with a Special Operations LCO are only applicable when the Special Operations LCO is used as an allowable exception to the requirements of a Specification.

Unplanned events may satisfy the requirements (including applicable acceptance criteria) for a given SR. In this case, the unplanned event may be credited as fulfilling the performance of the SR. This allowance includes those SRs whose performance is normally precluded in a given MODE or other specified condition.

(continued)

BASES

**SR 3.0.1
(continued)**

Surveillances, including Surveillances invoked by Required Actions, do not have to be performed on inoperable equipment because the ACTIONS define the remedial measures that apply. Surveillances have to be met and performed in accordance with SR 3.0.2, prior to returning equipment to OPERABLE status.

Upon completion of maintenance, appropriate post-work testing is required to declare equipment OPERABLE. This includes ensuring applicable Surveillances are not failed and their most recent performance is in accordance with SR 3.0.2. Post-work testing may not be possible in the current MODE or other specified conditions in the Applicability due to the necessary plant parameters not having been established. In these situations, the equipment may be considered OPERABLE provided testing has been satisfactorily completed to the extent possible and the equipment is not otherwise believed to be incapable of performing its function. This will allow operation to proceed to a MODE or other specified condition where other necessary post maintenance tests can be completed. Some examples of this process are:

- a. Control Rod Drive maintenance during refueling that requires scram testing at ≥ 800 psig. However, if other appropriate testing is satisfactorily completed and the scram time testing of SR 3.1.4.3 is satisfied, the control rod can be considered OPERABLE. This allows startup to proceed to reach 800 psig to perform other necessary testing.
- b. High pressure coolant injection (HPCI) maintenance during shutdown that requires system functional tests at a specified pressure. Provided other appropriate testing is satisfactorily completed, startup can proceed with HPCI considered OPERABLE. This allows operation to reach the specified pressure to complete the necessary post-work testing.

SR 3.0.2

SR 3.0.2 establishes the requirements for meeting the specified Frequency for Surveillances and any Required Action with a Completion Time that requires the periodic performance of the Required Action on a "once per..." interval.

(continued)

BASES

SR 3.0.2
(continued)

SR 3.0.2 permits a 25% extension of the interval specified in the Frequency. This extension facilitates Surveillance scheduling and considers plant operating conditions that may not be suitable for conducting the Surveillance (e.g., transient conditions or other ongoing Surveillance or maintenance activities).

The 25% extension does not significantly degrade the reliability that results from performing the Surveillance at its specified Frequency. This is based on the recognition that the most probable result of any particular Surveillance being performed is the verification of conformance with the SRs. The exceptions to SR 3.0.2 are those Surveillances for which the 25% extension of the interval specified in the Frequency does not apply. These exceptions are stated in the individual Specifications. The requirements of regulations take precedence over the TS. An example of where SR 3.0.2 does not apply is the Primary Containment Leakage Rate Testing Program. This program establishes testing requirements and Frequencies in accordance with the requirements of regulations. The TS cannot in and of themselves extend a test interval specified in the regulations.

As stated in SR 3.0.2, the 25% extension also does not apply to the initial portion of a periodic Completion Time that requires performance on a "once per..." basis. The 25% extension applies to each performance after the initial performance. The initial performance of the Required Action, whether it is a particular Surveillance or some other remedial action, is considered a single action with a single Completion Time. One reason for not allowing the 25% extension to this Completion Time is that such an action usually verifies that no loss of function has occurred by checking the status of redundant or diverse components or accomplishes the function of the inoperable equipment in an alternative manner.

The provisions of SR 3.0.2 are not intended to be used repeatedly merely as an operational convenience to extend Surveillance intervals (other than those consistent with refueling intervals) or periodic Completion Time intervals beyond those specified.

TSTF-52

(continued)

BASES (continued)

SR 3.0.3

SR 3.0.3 establishes the flexibility to defer declaring affected equipment inoperable or an affected variable outside the specified limits when a Surveillance has not been completed within the specified Frequency. A delay period of up to 24 hours or up to the limit of the specified Frequency, whichever is less, applies from the point in time that it is discovered that the Surveillance has not been performed in accordance with SR 3.0.2, and not at the time that the specified Frequency was not met. This delay period provides adequate time to complete Surveillances that have been missed. This delay period permits the completion of a Surveillance before complying with Required Actions or other remedial measures that might preclude completion of the Surveillance.

The basis for this delay period includes consideration of plant conditions, adequate planning, availability of personnel, the time required to perform the Surveillance, the safety significance of the delay in completing the required Surveillance, and the recognition that the most probable result of any particular Surveillance being performed is the verification of conformance with the requirements.

When a Surveillance with a Frequency based not on time intervals, but upon specified plant conditions or operational situations, is discovered not to have been performed when specified, SR 3.0.3 allows the full delay period of 24 hours to perform the Surveillance.

SR 3.0.3 also provides a time limit for completion of Surveillances that become applicable as a consequence of MODE changes imposed by Required Actions.

Failure to comply with specified Frequencies for SRs is expected to be an infrequent occurrence. Use of the delay period established by SR 3.0.3 is a flexibility which is not intended to be used as an operational convenience to extend Surveillance intervals.

If a Surveillance is not completed within the allowed delay period, then the equipment is considered inoperable or the variable is considered outside the specified limits and the Completion Times of the Required Actions for the applicable LCO Conditions begin immediately upon expiration of the delay period. If a Surveillance is failed within the delay

(continued)

BASES

SR 3.0.3
(continued)

period, then the equipment is inoperable, or the variable is outside the specified limits and the Completion Times of the Required Actions for the applicable LCO Conditions begin immediately upon the failure of the Surveillance.

Completion of the Surveillance within the delay period allowed by this Specification, or within the Completion Time of the ACTIONS, restores compliance with SR 3.0.1.

SR 3.0.4

SR 3.0.4 establishes the requirement that all applicable SRs must be met before entry into a MODE or other specified condition in the Applicability.

This Specification ensures that system and component OPERABILITY requirements and variable limits are met before entry into MODES or other specified conditions in the Applicability for which these systems and components ensure safe operation of the plant.

The provisions of this Specification should not be interpreted as endorsing the failure to exercise the good practice of restoring systems or components to OPERABLE status before entering an associated MODE or other specified condition in the Applicability.

However, in certain circumstances, failing to meet an SR will not result in SR 3.0.4 restricting a MODE change or other specified condition change. When a system, subsystem, division, component, device, or variable is inoperable or outside its specified limits, the associated SR(s) are not required to be performed per SR 3.0.1, which states that Surveillances do not have to be performed on inoperable equipment. When equipment is inoperable, SR 3.0.4 does not apply to the associated SR(s) since the requirement for the SR(s) to be performed is removed. Therefore, failing to perform the Surveillance(s) within the specified Frequency, on equipment that is inoperable, does not result in an SR 3.0.4 restriction to changing MODES or other specified conditions of the Applicability. However, since the LCO is not met in this instance, LCO 3.0.4 will govern any restrictions that may (or may not) apply to MODE or other specified condition changes.

(continued)

BASES

SR 3.0.4
(continued)

The provisions of SR 3.0.4 shall not prevent changes in MODES or other specified conditions in the Applicability that are required to comply with ACTIONS. In addition, the provisions of SR 3.0.4 shall not prevent changes in MODES or other specified conditions in the Applicability that result from any plant shutdown.

The precise requirements for performance of SRs are specified such that exceptions to SR 3.0.4 are not necessary. The specific time frames and conditions necessary for meeting the SRs are specified in the Frequency, in the Surveillance, or both. This allows performance of Surveillances when the prerequisite condition(s) specified in a Surveillance procedure require entry into the MODE or other specified condition in the Applicability of the associated LCO prior to the performance or completion of a Surveillance. A Surveillance that could not be performed until after entering the LCO Applicability would have its Frequency specified such that it is not "due" until the specific conditions needed are met. Alternately, the Surveillance may be stated in the form of a Note as not required (to be met or performed) until a particular event, condition, or time has been reached. Further discussion of the specific formats of SRs' annotation is found in Section 1.4, Frequency.

SR 3.0.4 is only applicable when entering MODE 3 from MODE 4, MODE 2 from MODE 3, 4, or 5, or MODE 1 from MODE 2. Furthermore, SR 3.0.4 is applicable when entering any other specified condition in the Applicability only while operating in MODE 1, 2, or 3. The requirements of SR 3.0.4 do not apply in MODES 4 and 5, or in other specified conditions of the Applicability (unless in MODE 1, 2, or 3) because the ACTIONS of individual Specifications sufficiently define the remedial measures to be taken.

B 3.1 REACTIVITY CONTROL SYSTEMS

B 3.1.1 SHUTDOWN MARGIN (SDM)

BASES

BACKGROUND

SDM requirements are specified to ensure:

- a. The reactor can be made subcritical from all operating conditions and transients and Design Basis Events;
- b. The reactivity transients associated with postulated accident conditions are controllable within acceptable limits; and
- c. The reactor will be maintained sufficiently subcritical to preclude inadvertent criticality in the shutdown condition.

These requirements are satisfied by the control rods, as described in the Updated Final Safety Analysis Report (UFSAR) Section 16.6 (Ref. 1), which can compensate for the reactivity effects of the fuel and water temperature changes experienced during all operating conditions.

APPLICABLE SAFETY ANALYSES

The control rod drop accident (CRDA) analysis (Refs. 2 and 3) assumes the core is subcritical with the highest worth control rod withdrawn. Typically, the first control rod withdrawn has a very high reactivity worth and, should the core SDM be substantially less than 0.38% $\Delta k/k$ during the withdrawal of the first control rod, the consequences of a CRDA could exceed the fuel damage limits for a CRDA (see Bases for LCO 3.1.6, "Rod Pattern Control"). Also, SDM is assumed as an initial condition for the control rod removal error during refueling (Ref. 4) and fuel assembly insertion error during refueling (Ref. 5) accidents. The analysis of these reactivity insertion events assumes the refueling interlocks are OPERABLE when the reactor is in the refueling mode of operation. These interlocks prevent the withdrawal of more than one control rod from the core during refueling. (Special consideration and requirements for multiple control rod withdrawal during refueling are covered in Special Operations LCO 3.10.6, "Multiple Control Rod Withdrawal-Refueling.") The analysis assumes this condition is acceptable since the core will be shut down

(continued)

BASES

APPLICABLE
SAFETY ANALYSES
(continued)

with the highest worth control rod withdrawn, if adequate SDM has been demonstrated.

Prevention or mitigation of reactivity insertion events is necessary to limit energy deposition in the fuel to prevent significant fuel damage, which could result in undue release of radioactivity. Adequate SDM ensures inadvertent criticalities and potential CRDAs involving high worth control rods (namely the first control rod withdrawn) will not cause significant fuel damage.

SDM satisfies Criterion 2 of 10 CFR 50.36(c)(2)(ii) (Ref. 5).

LCO

The specified SDM limit accounts for the uncertainty in the demonstration of the SDM by analysis or by a combination of test and analysis. A SDM limit is provided where the highest worth control rod is determined analytically. SDM is demonstrated by analysis or by a combination of test and analysis. During refueling it is demonstrated by analysis and during a startup it is demonstrated by a combination of test and analysis. To ensure adequate SDM during the design process, a design margin is included to account for uncertainties in the design calculations (Ref. 6).

APPLICABILITY

In MODES 1 and 2, SDM must be provided because subcriticality with the highest worth control rod withdrawn is assumed in the CRDA analysis (Ref. 2). In MODES 3 and 4, SDM is required to ensure the reactor will be held subcritical with margin for a single withdrawn control rod. SDM is required in MODE 5 to prevent an open vessel, inadvertent criticality during the withdrawal of a single control rod from a core cell containing one or more fuel assemblies or a fuel assembly insertion error (Ref. 7).

(continued)

BASES (continued)

ACTIONS

A.1

With SDM not within the limits of the LCO in MODE 1 or 2, SDM must be restored within 6 hours. Failure to meet the specified SDM may be caused by a control rod that cannot be inserted. The allowed Completion Time of 6 hours is acceptable, considering that the reactor can still be shut down, assuming no failures of additional control rods to insert, and the low probability of an event occurring during this interval.

B.1

If the SDM cannot be restored, the plant must be brought to MODE 3 in 12 hours, to prevent the potential for further reductions in available SDM (e.g., additional stuck control rods). The allowed Completion Time of 12 hours is reasonable, based on operating experience, to reach MODE 3 from full power conditions in an orderly manner and without challenging plant systems.

C.1

With SDM not within limits in MODE 3, the operator must immediately initiate action to fully insert all insertable control rods. Action must continue until all insertable control rods are fully inserted. This action results in the least reactive condition for the core.

D.1, D.2, D.3, and D.4

With SDM not within limits in MODE 4, the operator must immediately initiate action to fully insert all insertable control rods. Action must continue until all insertable control rods are fully inserted. This action results in the least reactive condition for the core. Action must also be initiated within 1 hour to provide means for control of potential radioactive releases. This includes ensuring secondary containment is OPERABLE; at least one Standby Gas Treatment (SGT) subsystem is OPERABLE; and secondary containment isolation capability is available in each associated secondary containment penetration flow path not isolated that is assumed to isolate to mitigate

(continued)

BASES

ACTIONS

D.1, D.2, D.3, and D.4 (continued)

radioactivity releases (i.e., at least one secondary containment isolation valve and associated instrumentation are OPERABLE, or acceptable administrative controls assure isolation capability. These administrative controls consist of stationing a dedicated operator, who is in continuous communication with the control room, at the controls of the isolation device. In this way, the penetration can be rapidly isolated when a need for secondary containment isolation is indicated). This may be performed as an administrative check, by examining logs or other information, to determine if the components are out of service for maintenance or other reasons. It is not necessary to perform the surveillances needed to demonstrate the OPERABILITY of the components. If, however, any required component is inoperable, then it must be restored to OPERABLE status. In this case, SRs may need to be performed to restore the component to OPERABLE status. Actions must continue until all required components are OPERABLE.

E.1, E.2, E.3, E.4, and E.5

With SDM not within limits in MODE 5, the operator must immediately suspend CORE ALTERATIONS that could reduce SDM (e.g., insertion of fuel in the core or the withdrawal of control rods). Suspension of these activities shall not preclude completion of movement of a component to a safe condition. Inserting control rods or removing fuel from the core will reduce the total reactivity and are therefore excluded from the suspended actions.

Action must also be immediately initiated to fully insert all insertable control rods in core cells containing one or more fuel assemblies. Action must continue until all insertable control rods in core cells containing one or more fuel assemblies have been fully inserted. Control rods in core cells containing no fuel assemblies do not affect the reactivity of the core and therefore do not have to be inserted.

Action must also be initiated within 1 hour to provide means for control of potential radioactive releases. This includes ensuring secondary containment is OPERABLE; at

(continued)

BASES

ACTIONS

E.1, E.2, E.3, E.4, and E.5 (continued)

Least one SGT subsystem is OPERABLE; and secondary containment isolation capability is available in each associated secondary containment penetration flow path not isolated that is assumed to isolate to mitigate radioactivity releases (i.e., at least one secondary containment isolation valve and associated instrumentation are OPERABLE, or acceptable administrative controls assure isolation capability. These administrative controls consist of stationing a dedicated operator, who is in continuous communication with the control room, at the controls of the isolation device. In this way, the penetration can be rapidly isolated when a need for secondary containment isolation is indicated). This may be performed as an administrative check, by examining logs or other information, to determine if the components are out of service for maintenance or other reasons. It is not necessary to perform the Surveillances as needed to demonstrate the OPERABILITY of the components. If, however, any required component is inoperable, then it must be restored to OPERABLE status. In this case, SRs may need to be performed to restore the component to OPERABLE status. Action must continue until all required components are OPERABLE.

SURVEILLANCE
REQUIREMENTSSR 3.1.1.1

Adequate SDM must be verified to ensure that the reactor can be made subcritical from any initial operating condition with the highest reactivity worth control rod fully withdrawn and all other control rods fully inserted. This can be accomplished by a test (by withdrawing control rods), an evaluation, or a combination of the two. Adequate SDM is demonstrated by testing before or during the first startup after fuel movement, or control rod replacement. Control rod replacement refers to the decoupling and removal of a control rod from a core location, and subsequent replacement with a new control rod or a control rod from another core location. Since core reactivity will vary during the cycle as a function of fuel depletion and poison burnup, the beginning of cycle (BOC) test must also account for changes in core reactivity during the cycle. Therefore, to obtain the SDM, the initial measured value must be increased by an

(continued)

BASES

SURVEILLANCE
REQUIREMENTSSR 3.1.1.1 (continued)

adder, "R", which is the difference between the calculated value of maximum core reactivity during the operating cycle and the calculated BOC core reactivity. If the value of R is negative (that is, BOC is the most reactive point in the cycle), no correction to the BOC measured value is required (Ref. 8).

The SDM may be demonstrated during an in-sequence control rod withdrawal or during local criticals. In both cases, the highest worth control rod is analytically determined. Local critical tests require the withdrawal of out of sequence control rods. This testing would therefore require bypassing of the rod worth minimizer to allow the out of sequence withdrawal, and therefore additional requirements must be met (see LCO 3.10.7, "Control Rod Testing-Operating" and LCO 3.10.8, "SHUTDOWN MARGIN Test-Refueling").

The Frequency of 4 hours after reaching criticality is allowed to provide a reasonable amount of time to perform the required calculations and have appropriate verification.

During MODES 3 or 4, analytical calculation of SDM may be used to assure the requirements of SR 3.1.1.1 are met. During MODE 5, adequate SDM is required to ensure that the reactor does not reach criticality during control rod withdrawals. An evaluation of each in-vessel fuel movement during fuel loading (including shuffling fuel within the core) is required to ensure adequate SDM is maintained during refueling. This evaluation ensures that the intermediate loading patterns are bounded by the safety analyses for the final core loading pattern. For example, bounding analyses that demonstrate adequate SDM for the most reactive configurations during the refueling may be performed to demonstrate acceptability of the entire fuel movement sequence. These bounding analyses include additional margins to the associated uncertainties. Spiral offload/reload sequences inherently satisfy the SR, provided the fuel assemblies are reloaded in the same configuration analyzed for the new cycle. Removing fuel from the core will always result in an increase in SDM.

(continued)

BASES (continued)

REFERENCES

1. UFSAR, Section 16.6.
 2. UFSAR, Section 14.6.1.2.
 3. NEDE-24011-P-A-13-US, General Electric Standard Application for Reactor Fuel, Supplement for United States, Section 2.2.3.1, August 1996.
 4. UFSAR, Section 14.5.4.3.
 5. 10 CFR 50.36(c)(2)(ii).
 6. UFSAR, Section 13.7.2.4.
 7. UFSAR, Section 14.5.4.4.
 8. NEDE-24011-P-A-13, General Electric Standard Application for Reactor Fuel, Section 3.2.4.1, August 1996.
-
-

B 3.1 REACTIVITY CONTROL SYSTEMS

B 3.1.2 Reactivity Anomalies

BASES

BACKGROUND

In accordance with the Updated Final Safety Evaluation Report (UFSAR) Section 16.6 (Ref. 1), reactivity shall be controllable such that subcriticality is maintained under cold conditions and acceptable fuel design limits are not exceeded during normal operation and abnormal operational transients. Therefore, Reactivity Anomalies are used as a measure of the predicted versus measured core reactivity during power operation. The continual confirmation of core reactivity is necessary to ensure that the Design Basis Accident (DBA) and transient safety analyses remain valid. A large reactivity anomaly could be the result of unanticipated changes in fuel reactivity or control rod worth or operation at conditions not consistent with those assumed in the predictions of core reactivity, and could potentially result in a loss of SDM or violation of acceptable fuel design limits. Comparing predicted versus measured core reactivity validates the nuclear methods used in the safety analysis and supports the SDM requirements (LCO 3.1.1, "SHUTDOWN MARGIN (SDM)") in assuring the reactor can be brought safely to cold, subcritical conditions.

When the reactor core is critical or in normal power operation, a reactivity balance exists and the net reactivity is zero. A comparison of predicted and measured reactivity is convenient under such a balance, since parameters are being maintained relatively stable under steady state power conditions. The positive reactivity inherent in the core design is balanced by the negative reactivity of the control components, thermal feedback, neutron leakage, and materials in the core that absorb neutrons, such as burnable absorbers, producing zero net reactivity.

In order to achieve the required fuel cycle energy output, the uranium enrichment in the new fuel loading and the fuel loaded in the previous cycles provide excess positive reactivity beyond that required to sustain steady state operation at the beginning of cycle (BOC). When the reactor is critical at RTP and operating moderator temperature, the excess positive reactivity is compensated by burnable absorbers (if any), control rods, and whatever neutron

(continued)

BASES

BACKGROUND
(continued)

poisons (mainly xenon and samarium) are present in the fuel. The predicted core reactivity, as represented by control rod density, is calculated by the 3D Monicore System as a function of cycle exposure. This calculation is performed for projected operating states and conditions throughout the cycle. The core reactivity is determined from control rod densities for actual plant conditions and is then compared to the predicted value for the cycle exposure.

APPLICABLE
SAFETY ANALYSES

Accurate prediction of core reactivity is either an explicit or implicit assumption in the accident analysis evaluations (Ref. 2). In particular, SDM and reactivity transients, such as control rod withdrawal accidents or rod drop accidents, are very sensitive to accurate prediction of core reactivity. These accident analysis evaluations rely on computer codes that have been qualified against available test data, operating plant data, and analytical benchmarks. Measuring reactivity anomaly provides additional assurance that the nuclear methods provide an accurate representation of the core reactivity.

The comparison between measured and predicted initial core reactivity provides a normalization for the calculational models used to predict core reactivity. If the measured and predicted rod density for identical core conditions at BOC do not reasonably agree, then the assumptions used in the reload cycle design analysis or the calculation models used to predict rod density may not be accurate. If reasonable agreement between measured and predicted core reactivity exists at BOC, then the prediction may be normalized to the measured value. Thereafter, any significant deviations in the measured rod density from the predicted rod density that develop during fuel depletion may be an indication that the assumptions of the DBA and transient analyses are no longer valid, or that an unexpected change in core conditions has occurred.

Reactivity Anomalies satisfy Criterion 2 of 10 CFR 50.36(c)(2)(ii) (Ref. 3).

(continued)

BASES (continued)

LCO

The reactivity anomaly limit is established to ensure plant operation is maintained within the assumptions of the safety analyses. Large differences between measured and predicted core reactivity may indicate that the assumptions of the DBA and transient analyses are no longer valid, or that the uncertainties in the "Nuclear Design Methodology" are larger than expected. A limit on the difference between the measured and the predicted rod density of $\pm 1\% \Delta k/k$ has been established based on engineering judgment. A $> 1\%$ deviation in reactivity from that predicted is larger than expected for normal operation and should therefore be evaluated.

APPLICABILITY

In MODE 1, most of the control rods are withdrawn and steady state operation is typically achieved. Under these conditions, the comparison between predicted and measured core reactivity provides an effective measure of the reactivity anomaly. In MODE 2, control rods are typically being withdrawn during a startup. In MODES 3 and 4, all control rods are fully inserted and therefore the reactor is in the least reactive state, where measuring core reactivity is not necessary. In MODE 5, fuel loading results in a continually changing core reactivity. SDM requirements (LCO 3.1.1) ensure that fuel movements are performed within the bounds of the safety analysis, and an SDM demonstration is required during the first startup following operations that could have altered core reactivity (e.g., fuel movement, control rod replacement, shuffling). The SDM test, required by LCO 3.1.1, provides a direct comparison of the predicted and measured core reactivity at cold conditions; therefore, the Reactivity Anomalies Specification is not required during these conditions.

ACTIONS

A.1

Should an anomaly develop between measured and predicted core reactivity, the core reactivity difference must be restored to within the limit to ensure continued operation is within the core design assumptions. Restoration to within the limit could be performed by an evaluation of the core design and safety analysis to determine the reason for the anomaly. This evaluation normally reviews the core

(continued)

BASES

ACTIONS

A.1 (continued)

conditions to determine their consistency with input to design calculations. Measured core and process parameters are also normally evaluated to determine that they are within the bounds of the safety analysis, and safety analysis calculational models may be reviewed to verify that they are adequate for representation of the core conditions. The required Completion Time of 72 hours is based on the low probability of a DBA occurring during this period, and allows sufficient time to assess the physical condition of the reactor and complete the evaluation of the core design and safety analysis.

B.1

If the core reactivity cannot be restored to within the $1\% \Delta k/k$ limit, the plant must be brought to a MODE in which the LCO does not apply. To achieve this status, the plant must be brought to at least MODE 3 within 12 hours. The allowed Completion Time of 12 hours is reasonable, based on operating experience, to reach MODE 3 from full power conditions in an orderly manner and without challenging plant systems.

SURVEILLANCE
REQUIREMENTS

SR 3.1.2.1

Verifying the reactivity difference between the measured and predicted rod density is within the limits of the LCO provides added assurance that plant operation is maintained within the assumptions of the DBA and transient analyses. The 3D Monicore System calculates the rod density for the reactor conditions obtained from plant instrumentation. A comparison of the measured rod density to the predicted rod density at the same cycle exposure is used to calculate the reactivity difference. The comparison is required when the core reactivity has potentially changed by a significant amount. This may occur following a refueling in which new fuel assemblies are loaded, fuel assemblies are shuffled within the core, or control rods are replaced or shuffled. Control rod replacement refers to the decoupling and removal of a control rod from a core location, and subsequent replacement with a new control rod or a control rod from

(continued)

BASES

SURVEILLANCE
REQUIREMENTS

SR 3.1.2.1 (continued)

another core location. Also, core reactivity changes during the cycle. The 24 hour interval after reaching equilibrium conditions following a startup is based on the need for equilibrium xenon concentrations in the core, such that an accurate comparison between the measured and predicted rod density can be made. For the purposes of this SR, the reactor is assumed to be at equilibrium conditions when steady state operations (no control rod movement or core flow changes) at $\geq 75\%$ RTP have been obtained. The every full power month Frequency was developed, considering the relatively slow change in core reactivity with exposure and operating experience related to variations in core reactivity. This comparison requires the core to be operating at power levels which minimize the uncertainties and measurement errors, in order to obtain meaningful results. Therefore, the comparison is only done when in MODE 1. The tests performed at this Frequency also use base data obtained during the first test of the specific cycle.

REFERENCES

1. UFSAR, Section 16.6.
 2. UFSAR, Chapter 14.
 3. 10 CFR 50.36(c)(2)(ii).
-
-

B 3.1 REACTIVITY CONTROL SYSTEMS

B 3.1.3 Control Rod OPERABILITY

BASES

BACKGROUND

Control rods are components of the Control Rod Drive (CRD) System, which is the primary reactivity control system for the reactor. In conjunction with the Reactor Protection System, the CRD System provides the means for the reliable control of reactivity changes to ensure under conditions of normal operation, including abnormal operational transients, that specified acceptable fuel design limits are not exceeded. In addition, the control rods provide the capability to hold the reactor core subcritical under all conditions and to limit the potential amount and rate of reactivity increase caused by a malfunction in the CRD System. The CRD System is designed to satisfy the requirements specified in Reference 1.

The CRD System consists of 137 locking piston CRDs and a hydraulic control unit for each CRD. The locking piston type CRD is a double acting hydraulic piston, which uses condensate water as the operating fluid. Accumulators provide additional energy for scram. An index tube and piston, coupled to the control rod, are locked at fixed increments by a collet mechanism. The collet fingers engage notches in the index tube to prevent unintentional withdrawal of the control rod, but without restricting insertion.

This Specification, along with LCO 3.1.4, "Control Rod Scram Times," and LCO 3.1.5, "Control Rod Scram Accumulators," ensure that the performance of the control rods in the event of a Design Basis Accident (DBA) or transient meets the assumptions used in the safety analyses of References 2, and 3.

APPLICABLE
SAFETY ANALYSES

The control rods provide the primary means for rapid reactivity control (reactor scram), for maintaining the reactor subcritical and for limiting the potential effects of reactivity insertion events caused by malfunctions in the CRD System.

(continued)

BASES

APPLICABLE
SAFETY ANALYSES
(continued)

The capability to insert the control rods provides assurance that the assumptions for scram reactivity in the DBA and transient analyses are not violated (Refs. 2 and 3). Since the SDM ensures the reactor will be subcritical with the highest worth control rod withdrawn (assumed single failure), the additional failure of a second control rod to insert, if required, could invalidate the demonstrated SDM and potentially limit the ability of the CRD System to hold the reactor subcritical. If the control rod is stuck at an inserted position and becomes decoupled from the CRD, a control rod drop accident (CRDA) can possibly occur. Therefore, the requirement that all control rods be OPERABLE ensures the CRD System can perform its intended function.

The control rods also protect the fuel from damage which could result in release of radioactivity. The limits protected are the MCPR Safety Limit (SL) (see Bases for SL 2.1.1, "Reactor Core SLs," and LCO 3.2.2, "MINIMUM CRITICAL POWER RATIO (MCPR)"), the 1% cladding plastic strain fuel design limit (see Bases for LCO 3.2.1, "AVERAGE PLANAR LINEAR HEAT GENERATION RATE (APLHGR)", and LCO 3.2.3, "LINEAR HEAT GENERATION RATE (LHGR)") and the fuel damage limit (see Bases for LCO 3.1.6, "Rod Pattern Control") during reactivity insertion events.

The negative reactivity insertion (scram) provided by the CRD System provides the analytical basis for determination of plant thermal limits and provides protection against fuel damage limits during a CRDA. The Bases for LCO 3.1.4, LCO 3.1.5, and LCO 3.1.6 discuss in more detail how the SLs are protected by the CRD System.

Control rod OPERABILITY satisfies Criterion 3 of 10 CFR 50.36(c)(2)(ii) (Ref. 4).

LCO

The OPERABILITY of an individual control rod is based on a combination of factors, primarily, the scram insertion times, the control rod coupling integrity, and the ability to determine the control rod position. Accumulator OPERABILITY is addressed by LCO 3.1.5. The associated scram accumulator status for a control rod only affects the scram insertion times; therefore, an inoperable accumulator does not immediately require declaring a control rod inoperable. Although not all control rods are required to be OPERABLE to

(continued)

BASES

LCO
(continued) satisfy the intended reactivity control requirements, strict control over the number and distribution of inoperable control rods is required to satisfy the assumptions of the DBA and transient analyses.

APPLICABILITY In MODES 1 and 2, the control rods are assumed to function during a DBA or transient and are therefore required to be OPERABLE in these MODES. In MODES 3 and 4, control rods are not able to be withdrawn since the reactor mode switch is in shutdown and a control rod block is applied. This provides adequate requirements for control rod OPERABILITY during these conditions. Control rod requirements in MODE 5 are located in LCO 3.9.5, "Control Rod OPERABILITY-Refueling."

ACTIONS The ACTIONS Table is modified by a Note indicating that a separate Condition entry is allowed for each control rod. This is acceptable, since the Required Actions for each Condition provide appropriate compensatory actions for each inoperable control rod. Complying with the Required Actions may allow for continued operation, and subsequent inoperable control rods are governed by subsequent Condition entry and application of associated Required Actions.

A.1, A.2, A.3, and A.4

A control rod is considered stuck if it will not insert by either CRD drive water or scram pressure. With a fully inserted control rod stuck, no actions are required as long as the control rod remains fully inserted. The Required Actions are modified by a Note, which allows the rod worth minimizer (RWM) to be bypassed if required to allow continued operation. LCO 3.3.2.1, "Control Rod Block Instrumentation," provides additional requirements when the RWM is bypassed to ensure compliance with the CRDA analysis. With one withdrawn control rod stuck, the local scram reactivity rate assumptions may not be met if the stuck control rod separation criteria are not met. Therefore, a verification that the separation criteria are met must be performed immediately. The separation criteria are not met if a) the stuck control rod occupies a location adjacent to

(continued)

BASES

ACTIONS

A.1, A.2, A.3, and A.4 (continued)

two "slow" control rods, b) the stuck control rod occupies a location adjacent to one "slow" control rod, and the one "slow" control rod is also adjacent to another "slow" control rod, or c) if the stuck control rod occupies a location adjacent to one "slow" control rod when there is another pair of "slow" control rods adjacent to one another. The description of "slow" control rods is provided in LCO 3.1.4, "Control Rod Scram Times." In addition, the associated control rod drive must be disarmed (hydraulically) in 2 hours. The allowed Completion Time of 2 hours is acceptable, considering the reactor can still be shut down, assuming no additional control rods fail to insert, and provides a reasonable time to perform the Required Action in an orderly manner. The control rod must be isolated from both scram and normal insert and withdraw pressure. Isolating the control rod in this manner prevents damage to the stuck CRD. In addition, the control rod should be isolated while maintaining cooling water to the CRD.

Demonstrating the insertion capability of each withdrawn control rod must also be performed within 24 hours from discovery of Condition A concurrent with THERMAL POWER greater than the low power setpoint (LPSP) of the RWM. SR 3.1.3.2 and SR 3.1.3.3 require periodic tests of the control rod insertion capability of withdrawn control rods. Testing each withdrawn control rod ensures that a generic problem does not exist. This Completion Time allows for an exception to the normal "time zero" for beginning the allowed outage time "clock." The Required Action A.3 Completion Time only begins upon discovery of Condition A concurrent with THERMAL POWER greater than the actual LPSP of the RWM since the notch insertions may not be compatible with the requirements of rod pattern control (LCO 3.1.6) and the RWM (LCO 3.3.2.1). The allowed Completion Time of 24 hours from discovery of Condition A concurrent with THERMAL POWER greater than the LPSP of the RWM provides a reasonable time to test the control rods, considering the potential for a need to reduce power to perform the tests.

To allow continued operation with a withdrawn control rod stuck, an evaluation of adequate SDM is also required within 72 hours. Should a DBA or transient require a shutdown, to preserve the single failure criterion, an additional control

(continued)

BASES

ACTIONS

A.1, A.2, A.3, and A.4 (continued)

rod would have to be assumed to fail to insert when required. Therefore, the original SDM demonstration may not be valid. The SDM must therefore be evaluated (by measurement or analysis) with the stuck control rod at its stuck position and the highest worth OPERABLE control rod assumed to be fully withdrawn.

The allowed Completion Time of 72 hours to verify SDM is adequate, considering that with a single control rod stuck in a withdrawn position, the remaining OPERABLE control rods are capable of providing the required scram and shutdown reactivity. Failure to reach MODE 4 condition is only likely if an additional control rod adjacent to the stuck control rod also fails to insert during a required scram. Even with the postulated additional single failure of an adjacent control rod to insert, sufficient reactivity control remains to reach and maintain MODE 3 conditions (Ref. 5).

RA1 31-047

B.1

With two or more withdrawn control rods stuck, the plant must be brought to MODE 3 within 12 hours. The occurrence of more than one control rod stuck at a withdrawn position increases the probability that the reactor cannot be shut down if required. Insertion of all insertable control rods eliminates the possibility of an additional failure of a control rod to insert. The allowed Completion Time of 12 hours is reasonable, based on operating experience, to reach MODE 3 from full power conditions in an orderly manner and without challenging plant systems.

C.1 and C.2

With one or more control rods inoperable for reasons other than being stuck in the withdrawn position, operation may continue, provided the control rods are fully inserted within 3 hours and disarmed (electrically or hydraulically) within 4 hours. Inserting a control rod ensures the shutdown and scram capabilities are not adversely affected. The control rod is disarmed to prevent inadvertent withdrawal during subsequent operations. The control rods

(continued)

BASES

ACTIONS

C.1 and C.2 (continued)

can be hydraulically disarmed by closing the drive water and exhaust water isolation valves. The control rods can be electrically disarmed by disconnecting power from all four directional control valve solenoids. Required Action C.1 is modified by a Note, which allows the RWM to be bypassed if required to allow insertion of the inoperable control rods and continued operation. LCO 3.3.2.1 provides additional requirements when the RWM is bypassed to ensure compliance with the CRDA analysis.

The allowed Completion Times are reasonable, considering the small number of allowed inoperable control rods, and provide time to insert and disarm the control rods in an orderly manner and without challenging plant systems.

D.1 and D.2

Out of sequence control rods may increase the potential reactivity worth of a dropped control rod during a CRDA. At $\leq 10\%$ RTP, the generic banked position withdrawal sequence (BPWS) analysis (Ref. 5) requires inserted control rods not in compliance with BPWS to be separated by at least two OPERABLE control rods in all directions, including the diagonal. Therefore, if two or more inoperable control rods are not in compliance with BPWS and not separated by at least two OPERABLE control rods, action must be taken to restore compliance with BPWS or restore the control rods to OPERABLE status. Condition D is modified by a Note indicating that the Condition is not applicable when $> 10\%$ RTP, since the BPWS is not required to be followed under these conditions, as described in the Bases for LCO 3.1.6. The allowed Completion Time of 4 hours is acceptable, considering the low probability of a CRDA occurring.

E.1

If any Required Action and associated Completion Time of Condition A, C, or D are not met, or there are nine or more inoperable control rods, the plant must be brought to a MODE in which the LCO does not apply. To achieve this status, the plant must be brought to MODE 3 within 12 hours. This

(continued)

BASES

ACTIONS

E.1 (continued)

ensures all insertable control rods are inserted and places the reactor in a condition that does not require the active function (i.e., scram) of the control rods. The number of control rods permitted to be inoperable when operating above 10% RTP (i.e., no CRDA considerations) could be more than the value specified, but the occurrence of a large number of inoperable control rods could be indicative of a generic problem, and investigation and resolution of the potential problem should be undertaken. The allowed Completion Time of 12 hours is reasonable, based on operating experience, to reach MODE 3 from full power in an orderly manner and without challenging plant systems.

SURVEILLANCE
REQUIREMENTS

SR 3.1.3.1

The position of each control rod must be determined to ensure adequate information on control rod position is available to the operator for determining control rod OPERABILITY and controlling rod patterns. Control rod position may be determined by the use of OPERABLE position indicators, by moving control rods to a position with an OPERABLE indicator, or by the use of other appropriate methods. The 24 hour Frequency of this SR is based on operating experience related to expected changes in control rod position and the availability of control rod position indications in the control room.

SR 3.1.3.2 and SR 3.1.3.3

Control rod insertion capability is demonstrated by inserting each partially or fully withdrawn control rod at least one notch and observing that the control rod moves. The control rod may then be returned to its original position. This ensures the control rod is not stuck and is free to insert on a scram signal. These Surveillances are not required when THERMAL POWER is less than or equal to the actual LPSP of the RWM, since the notch insertions may not be compatible with the requirements of the Banked Position Withdrawal Sequence (BPWS) (LCO 3.1.6) and the RWM (LCO 3.3.2.1). The 7 day Frequency of SR 3.1.3.2 is based on operating experience related to the changes in CRD

(continued)

BASES

SURVEILLANCE
REQUIREMENTS

SR 3.1.3.2 and SR 3.1.3.3 (continued)

performance and the ease of performing notch testing for fully withdrawn control rods. Partially withdrawn control rods are tested at a 31 day Frequency, based on the potential power reduction required to allow the control rod movement and considering the large testing sample of SR 3.1.3.2. Furthermore, the 31 day Frequency takes into account operating experience related to changes in CRD performance. At any time, if a control rod is immovable, a determination of the control rods OPERABILITY must be made and appropriate action taken. These SRs are modified by Notes that allows 7 days and 31 days respectively, after withdrawal of the control rod and increasing power to above the LPSP of the RWM, to perform the Surveillance. This acknowledges that the control rod must be first withdrawn and THERMAL Power must increase to above the LPSP before performance of the Surveillance, and therefore the Notes avoid potential conflicts with SR 3.0.3 and SR 3.0.4.

SR 3.1.3.4

Verifying that the scram time for each control rod to notch position 04 is ≤ 7 seconds provides reasonable assurance that the control rod will insert when required during a DBA or transient, thereby completing its shutdown function. This SR is performed in conjunction with the control rod scram time testing of SR 3.1.4.1, SR 3.1.4.2, SR 3.1.4.3, and SR 3.1.4.4. The LOGIC SYSTEM FUNCTIONAL TEST in LCO 3.3.1.1, "Reactor Protection System (RPS) Instrumentation," and the functional testing of SDV vent and drain valves in LCO 3.1.8, "Scram Discharge Volume (SDV) Vent and Drain Valves," overlap this Surveillance to provide complete testing of the assumed safety function. The associated Frequencies are acceptable, considering the more frequent testing performed to demonstrate other aspects of control rod OPERABILITY and operating experience, which shows scram times do not significantly change over an operating cycle.

(continued)

BASES

SURVEILLANCE
REQUIREMENTS
(continued)

SR 3.1.3.5

Coupling verification is performed to ensure the control rod is connected to the CRD and will perform its intended function when necessary. The Surveillance requires verifying a control rod does not go to the withdrawn overtravel position. The overtravel position feature provides a positive check on the coupling integrity since only an uncoupled CRD can reach the overtravel position. The verification is required to be performed any time a control rod is withdrawn to the "full out" position (notch position 48) or prior to declaring the control rod OPERABLE after work on the control rod or CRD System that could affect coupling. This includes control rods inserted one notch and then returned to the "full out" position during the performance of SR 3.1.3.2. This Frequency is acceptable, considering the low probability that a control rod will become uncoupled when it is not being moved and operating experience related to uncoupling events.

REFERENCES

1. UFSAR, Section 16.6.
 2. UFSAR, Section 14.6.
 3. UFSAR, Section 14.5.
 4. 10 CFR 50.36(c)(2)(ii).
 5. NEDO-21231, Banked Position Withdrawal Sequence, Section 7.2, January 1977.
-
-

B 3.1 REACTIVITY CONTROL SYSTEMS

B 3.1.4 Control Rod Scram Times

BASES

BACKGROUND

The scram function of the Control Rod Drive (CRD) System controls reactivity changes during abnormal operational transients to ensure that specified acceptable fuel design limits are not exceeded (Ref. 1). The control rods are scrambled by positive means using hydraulic pressure exerted on the CRD piston.

When a scram signal is initiated, control air is vented from the scram valves, allowing them to open by spring action. Opening the exhaust valve reduces the pressure above the main drive piston to atmospheric pressure, and opening the inlet valve applies the accumulator or reactor pressure to the bottom of the piston. Since the notches in the index tube are tapered on the lower edge, the collet fingers are forced open by cam action, allowing the index tube to move upward without restriction because of the high differential pressure across the piston. As the drive moves upward and the accumulator pressure reduces below the reactor pressure, a ball check valve opens, letting the reactor pressure complete the scram action. If the reactor pressure is low, such as during startup, the accumulator will fully insert the control rod in the required time without assistance from reactor pressure.

APPLICABLE SAFETY ANALYSES

The Design Basis Accident (DBA) and transient analyses assume that all of the control rods scram at a specified insertion rate (Refs. 2 and 3). The resulting negative scram reactivity forms the basis for the determination of plant thermal limits (e.g., the MCPR). Other distributions of scram times (e.g., several control rods scrambling slower than the average time with several control rods scrambling faster than the average time) can also provide sufficient scram reactivity. Surveillance of each individual control rod's scram time ensures the scram reactivity assumed in the DBA and transient analyses can be met.

The scram function of the CRD System protects the MCPR Safety Limit (SL) (see Bases for SL 2.1.1, "Reactor Core SLs," and LCO 3.2.2, "MINIMUM CRITICAL POWER RATIO (MCPR)")

(continued)

BASES

APPLICABLE
SAFETY ANALYSES
(continued)

and the 1% cladding plastic strain fuel design limit (see Bases for LCO 3.2.1, "AVERAGE PLANAR LINEAR HEAT GENERATION RATE (APLHGR)"), which ensure that no fuel damage will occur if these limits are not exceeded. Above 800 psig, the scram function is designed to insert negative reactivity at a rate fast enough to prevent the actual MCPR from becoming less than the MCPR SL, during the analyzed limiting power transient. Below 800 psig, the scram function is assumed to mitigate the control rod drop accident (Ref. 4) and, therefore, also provides protection against violating fuel damage limits during reactivity insertion accidents (see Bases for LCO 3.1.6, "Rod Pattern Control"). For the reactor vessel overpressure protection analysis, the scram function, along with the safety/relief valves, ensure that the peak vessel pressure is maintained within the applicable ASME Code limits.

Control rod scram times satisfy Criterion 3 of 10 CFR 50.36(c)(2)(ii) (Ref. 5).

LCO

The scram times specified in Table 3.1.4-1 are required to ensure that the scram reactivity assumed in the DBA and transient analysis is met (Ref. 6). To account for single failures and "slow" scrambling control rods, the scram times specified in Table 3.1.4-1 are faster than those assumed in the design basis analysis. The scram times have a margin that allows 10 control rods to have scram times exceeding the specified limits (i.e., "slow" control rods) assuming a single stuck control rod (as allowed by LCO 3.1.3, "Control Rod OPERABILITY") and an additional control rod failing to scram per the single failure criterion. The scram times are specified as a function of reactor steam dome pressure to account for the pressure dependence of the scram times. The scram times are specified relative to measurements based on reed switch positions, which provide the control rod position indication. The reed switch closes ("pickup") when the index tube passes a specific location and then opens ("dropout") as the index tube travels upward. Verification of the specified scram times in Table 3.1.4-1 is accomplished through measurement of the "dropout" times. To ensure that local scram reactivity rates are maintained within acceptable limits, no more than two of the allowed "slow" control rods may occupy adjacent locations.

(continued)

BASES

LCO
(continued)

Table 3.1.4-1 is modified by two Notes which state that control rods with scram times not within the limits of the table are considered "slow" and that control rods with scram times > 7 seconds are considered inoperable as required by SR 3.1.3.4.

This LCO applies only to OPERABLE control rods since inoperable control rods will be inserted and disarmed (LCO 3.1.3). Slow scrambling control rods may be conservatively declared inoperable and not accounted for as "slow" control rods.

APPLICABILITY

In MODES 1 and 2, a scram is assumed to function during transients and accidents analyzed for these plant conditions. These events are assumed to occur during startup and power operation; therefore, the scram function of the control rods is required during these MODES. In MODES 3 and 4, the control rods are not able to be withdrawn since the reactor mode switch is in shutdown and a control rod block is applied. This provides adequate requirements for control rod scram capability during these conditions. Scram requirements in MODE 5 are contained in LCO 3.9.5, "Control Rod OPERABILITY-Refueling."

ACTIONS

A.1

When the requirements of this LCO are not met, the rate of negative reactivity insertion during a scram may not be within the assumptions of the safety analyses. Therefore, the plant must be brought to a MODE in which the LCO does not apply. To achieve this status, the plant must be brought to MODE 3 within 12 hours. The allowed Completion Time of 12 hours is reasonable, based on operating experience, to reach MODE 3 from full power conditions in an orderly manner and without challenging plant systems.

SURVEILLANCE
REQUIREMENTS

The four SRs of this LCO are modified by a Note stating that during a single control rod scram time surveillance, the CRD pumps shall be isolated from the associated scram accumulator. With the CRD pump isolated, (i.e., charging

(continued)

BASES

SURVEILLANCE
REQUIREMENTS
(continued)

valve closed) the influence of the CRD pump head does not affect the single control rod scram times. During a full core scram, the CRD pump head would be seen by all control rods and would have a negligible effect on the scram insertion times.

SR 3.1.4.1

The scram reactivity used in DBA and transient analyses is based on an assumed control rod scram time. Measurement of the scram times with reactor steam dome pressure \approx 800 psig demonstrates acceptable scram times for the transients analyzed in References 3 and 4.

Maximum scram insertion times occur at a reactor steam dome pressure of approximately 800 psig because of the competing effects of reactor steam dome pressure and stored accumulator energy. Therefore, demonstration of adequate scram times at reactor steam dome pressure \approx 800 psig ensures that the measured scram times will be within the specified limits at higher pressures. Limits are specified as a function of reactor pressure to account for the sensitivity of the scram insertion times with pressure and to allow a range of pressures over which scram time testing can be performed. To ensure that scram time testing is performed within a reasonable time following a shutdown duration of \geq 120 days, control rods are required to be tested before exceeding 40% RTP following the shutdown. This Frequency is acceptable considering the additional surveillances performed for control rod OPERABILITY, the frequent verification of adequate accumulator pressure, and the required testing of control rods affected by fuel movement within the associated core cell and by work on control rods or the CRD System.

SR 3.1.4.2

Additional testing of a sample of control rods is required to verify the continued performance of the scram function during the cycle. A representative sample contains at least 10% of the control rods. The sample remains representative if no more than 20% of the control rods in the sample tested are determined to be "slow." With more than 20% of the sample declared to be "slow" per the criteria in

(continued)

TSTF-222

BASES

SURVEILLANCE
REQUIREMENTS

< see Bases JFO 084 >

SR 3.1.4.2 (continued)

Table 3.1.4-1, additional control rods are tested until this 20% criterion (i.e., 20% of the entire sample size) is satisfied, or until the total number of "slow" control rods (throughout the core, from all surveillances) exceeds the LCO limit. For planned testing, the control rods selected for the sample should be different for each test. Data from inadvertent scrams should be used whenever possible to avoid unnecessary testing at power, even if the control rods with data may have been previously tested in a sample. The 120 day Frequency is based on operating experience that has shown control rod scram times do not significantly change over an operating cycle. This Frequency is also reasonable based on the additional Surveillances done on the CRDs at more frequent intervals in accordance with LCO 3.1.3 and LCO 3.1.5, "Control Rod Scram Accumulators."

SR 3.1.4.3

When work that could affect the scram insertion time is performed on a control rod or the CRD System, testing must be done to demonstrate that each affected control rod retains adequate scram performance over the range of applicable reactor pressures from zero to the maximum permissible pressure. The scram testing must be performed once before declaring the control rod OPERABLE. The required scram time testing must demonstrate the affected control rod is still within acceptable limits. The limits for reactor pressures < 800 psig are found in the Technical Requirements Manual (Ref. 7) and are established based on a high probability of meeting the acceptance criteria at reactor pressures \geq 800 psig. Limits for \geq 800 psig are found in Table 3.1.4-1. If testing demonstrates the affected control rod does not meet these limits, but is within the 7-second limit of Table 3.1.4-1, Note 2, the control rod can be declared OPERABLE and "slow."

Specific examples of work that could affect the scram times are (but are not limited to) the following: removal of any CRD for maintenance or modification; replacement of a control rod; and maintenance or modification of a scram pilot valve, scram valve, accumulator, isolation valve or check valve in the piping required for scram.

(continued)

BASES

SURVEILLANCE
REQUIREMENTS

SR 3.1.4.3 (continued)

The Frequency of once prior to declaring the affected control rod OPERABLE is acceptable because of the capability to test the control rod over a range of operating conditions and the more frequent surveillances on other aspects of control rod OPERABILITY.

SR 3.1.4.4

When work that could affect the scram insertion time is performed on a control rod or CRD System, or when fuel movement within the reactor pressure vessel occurs, testing must be done to demonstrate each affected control rod is still within the limits of Table 3.1.4-1 with the reactor steam dome pressure ≥ 800 psig. Where work has been performed at high reactor pressure (≥ 800 psig), the requirements of SR 3.1.4.3 and SR 3.1.4.4 can be satisfied with one test. For a control rod affected by work performed while at low pressure (< 800 psig), however, a low pressure and high pressure test may be required. This testing ensures that, prior to withdrawing the control rod for continued operation, the control rod scram performance is acceptable for operating reactor pressure conditions. Alternatively, a control rod scram test during hydrostatic pressure testing could also satisfy both criteria. When fuel movement occurs within the reactor pressure vessel, only those control rods associated with the core cells affected by the fuel movement are required to be scram time tested. During a routine refueling outage it is expected that all control rods will be affected.

The Frequency of once prior to exceeding 40% RTP is acceptable because of the capability to test the control rod over a range of operating conditions and the more frequent surveillances on other aspects of control rod OPERABILITY.

REFERENCES

1. UFSAR, Section 16.6.
2. UFSAR, Section 14.6.
3. UFSAR, Section 14.5.

(continued)

TSTF-222

TSTF-222

BASES

REFERENCES
(continued)

4. NEDE-24011-P-A-13-US, General Electric Standard Application for Reactor Fuel, Supplement for United States, Section 2.2.3.1, August 1996.
 5. 10 CFR 50.36(c)(2)(ii).
 6. Letter from R.F. Janecek (BWROG) to R.W. Starostecki (NRC), BWR Owners' Group Revised Reactivity Control System Technical Specifications, BWROG-8754, September 17, 1987.
 7. Technical Requirements Manual.
-
-

B 3.1 REACTIVITY CONTROL SYSTEMS

B 3.1.5 Control Rod Scram Accumulators

BASES

BACKGROUND

The control rod scram accumulators are part of the Control Rod Drive (CRD) System and are provided to ensure that the control rods scram under varying reactor conditions. The control rod scram accumulators store sufficient energy to fully insert a control rod at any reactor vessel pressure. The accumulator is a hydraulic cylinder with a free floating piston. The piston separates the water used to scram the control rods from the nitrogen, which provides the required energy. The scram accumulators are necessary to scram the control rods within the required insertion times of LCO 3.1.4, "Control Rod Scram Times."

APPLICABLE
SAFETY ANALYSES

The Design Basis Accident (DBA) and transient analyses assume that all of the control rods scram at a specified insertion rate (Refs. 1 and 2). OPERABILITY of each individual control rod scram accumulator, along with LCO 3.1.3, "Control Rod OPERABILITY," and LCO 3.1.4, ensures that the scram reactivity assumed in the DBA and transient analyses can be met. The existence of an inoperable accumulator may invalidate prior scram time measurements for the associated control rod.

The scram function of the CRD System, and therefore the OPERABILITY of the accumulators, protects the MCPR Safety Limit (see Bases for SL 2.1.1, "Reactor Core SLs," and LCO 3.2.2, "MINIMUM CRITICAL POWER RATIO (MCPR)") and 1% cladding plastic strain fuel design limit (see Bases for LCO 3.2.1, "AVERAGE PLANAR LINEAR HEAT GENERATION RATE (APLHGR)", and LCO 3.2.3, "LINEAR HEAT GENERATION RATE (LHGR)"), which ensure that no fuel damage will occur if these limits are not exceeded (see Bases for LCO 3.1.4). In addition, the scram function at low reactor vessel pressure (i.e., startup conditions) provides protection against violating fuel design limits during reactivity insertion accidents (see Bases for LCO 3.1.6, "Rod Pattern Control").

Control rod scram accumulators satisfy Criterion 3 of 10 CFR 50.36(c)(2)(ii) (Ref. 3).

(continued)

BASES (continued)

LCO The OPERABILITY of the control rod scram accumulators is required to ensure that adequate scram insertion capability exists when needed over the entire range of reactor pressures. The OPERABILITY of the scram accumulators is based on maintaining adequate accumulator pressure.

APPLICABILITY In MODES 1 and 2, the scram function is required for mitigation of DBAs and transients, and therefore the scram accumulators must be OPERABLE to support the scram function. In MODES 3 and 4, control rods are not capable of being withdrawn since the reactor mode switch is in shutdown and a control rod block is applied. This provides adequate requirements for control rod scram accumulator OPERABILITY during these conditions. Requirements for scram accumulators in MODE 5 are contained in LCO 3.9.5, "Control Rod OPERABILITY - Refueling."

ACTIONS The ACTIONS Table is modified by a Note indicating that a separate Condition entry is allowed for each control rod scram accumulator. This is acceptable since the Required Actions for each Condition provide appropriate compensatory actions for each inoperable accumulator. Complying with the Required Actions may allow for continued operation.

A.1 and A.2

With one control rod scram accumulator inoperable and the reactor steam dome pressure ≥ 900 psig, the control rod may be declared "slow," since the control rod will still scram at the reactor operating pressure but may not satisfy the required scram times in Table 3.1.4-1.

Required Action A.1 is modified by a Note indicating that declaring the control rod "slow" only applies if the associated control scram time was within the limits of Table 3.1.4-1 during the last scram time test. Otherwise, the control rod would already be considered "slow" and the further degradation of scram performance with an inoperable accumulator could result in excessive scram times. In this event, the associated control rod is declared inoperable (Required Action A.2) and LCO 3.1.3 is entered. This would

(continued)

BASES

ACTIONS

A.1 and A.2 (continued)

result in requiring the affected control rod to be fully inserted and disarmed, thereby satisfying its intended function, in accordance with ACTIONS of LCO 3.1.3.

The allowed Completion Time of 8 hours is reasonable, based on the large number of control rods available to provide the scram function and the ability of the affected control rod to scram only with reactor pressure at high reactor pressures.

B.1, B.2.1, and B.2.2

With two or more control rod scram accumulators inoperable and reactor steam dome pressure ≥ 900 psig, adequate pressure must be supplied to the charging water header. With inadequate charging water pressure, all of the accumulators could become inoperable, resulting in a potentially severe degradation of scram performance. Therefore, within 20 minutes from discovery of charging water header pressure < 940 psig concurrent with Condition B, adequate charging water header pressure must be restored. The allowed Completion Time of 20 minutes is reasonable, to place a CRD pump into service to restore the charging water header pressure, if required. This Completion Time is based on the ability of the reactor pressure alone to fully insert all control rods.

The control rod may be declared "slow," since the control rod will still scram using only reactor pressure, but may not satisfy the times in Table 3.1.4-1. Required Action B.2.1 is modified by a Note indicating that declaring the control rod "slow" only applies if the associated control scram time is within the limits of Table 3.1.4-1 during the last scram time test. Otherwise, the control rod would already be considered "slow" and the further degradation of scram performance with an inoperable accumulator could result in excessive scram times. In this event, the associated control rod is declared inoperable (Required Action B.2.2) and LCO 3.1.3 entered. This would result in requiring the affected control rod to be fully inserted and disarmed, thereby satisfying its intended function in accordance with ACTIONS of LCO 3.1.3.

(continued)

BASES

ACTIONS

B.1, B.2.1, and B.2.2 (continued)

The allowed Completion Time of 1 hour is reasonable, based on the ability of only the reactor pressure to scram the control rods and the low probability of a DBA or transient occurring while the affected accumulators are inoperable.

C.1 and C.2

With one or more control rod scram accumulators inoperable and the reactor steam dome pressure < 900 psig, the pressure supplied to the charging water header must be adequate to ensure that accumulators remain charged. With the reactor steam dome pressure < 900 psig, the function of the accumulators in providing the scram force becomes much more important since the scram function could become severely degraded during a depressurization event or at low reactor pressures. Therefore, immediately upon discovery of charging water header pressure < 940 psig, concurrent with Condition C, all control rods associated with inoperable accumulators must be verified to be fully inserted. Withdrawn control rods with inoperable accumulators may fail to scram under these low pressure conditions. The associated control rods must also be declared inoperable within 1 hour. The allowed Completion Time of 1 hour is reasonable for Required Action C.2, considering the low probability of a DBA or transient occurring during the time that the accumulator is inoperable.

D.1

The reactor mode switch must be immediately placed in the shutdown position if either Required Action and associated Completion Time associated with loss of the CRD charging pump (Required Actions B.1 and C.1) cannot be met. This ensures that all insertable control rods are inserted and that the reactor is in a condition that does not require the active function (i.e., scram) of the control rods. This Required Action is modified by a Note stating that the action is not applicable if all control rods associated with the inoperable scram accumulators are fully inserted, since the function of the control rods has been performed.

(continued)

BASES (continued)

SURVEILLANCE
REQUIREMENTS

SR 3.1.5.1

SR 3.1.5.1 requires that the accumulator pressure be checked every 7 days to ensure adequate accumulator pressure exists to provide sufficient scram force. The primary indicator of accumulator OPERABILITY is the accumulator pressure. A minimum accumulator pressure is specified, below which the capability of the accumulator to perform its intended function becomes degraded and the accumulator is considered inoperable. The minimum accumulator pressure of 940 psig is well below the expected pressure of 1380 to 1510 psig. Declaring the accumulator inoperable when the minimum pressure is not maintained ensures that significant degradation in scram times does not occur. The 7 day Frequency has been shown to be acceptable through operating experience and takes into account indications available in the control room.

REFERENCES

1. UFSAR, Section 14.6.
 2. UFSAR, Section 14.5.
 3. 10 CFR 50.36(c)(2)(ii).
-
-

B 3.1 REACTIVITY CONTROL SYSTEMS

B 3.1.6 Rod Pattern Control

BASES

BACKGROUND

Control rod patterns during startup conditions are controlled by the operator and the rod worth minimizer (RWM) (LCO 3.3.2.1, "Control Rod Block Instrumentation"), so that only specified control rod sequences and relative positions are allowed over the operating range of all control rods inserted to 10% RTP. The sequences limit the potential amount of reactivity addition that could occur in the event of a Control Rod Drop Accident (CRDA).

This Specification assures that the control rod patterns are consistent with the assumptions of the CRDA analyses of References 1 and 2.

APPLICABLE SAFETY ANALYSES

The analytical methods and assumptions used in evaluating the CRDA are summarized in References 1 and 2. CRDA analyses assume that the reactor operator follows prescribed withdrawal sequences. These sequences define the potential initial conditions for the CRDA analysis. The RWM (LCO 3.3.2.1) provides backup to operator control of the withdrawal sequences to ensure that the initial conditions of the CRDA analysis are not violated.

Prevention or mitigation of positive reactivity insertion events is necessary to limit the energy deposition in the fuel, thereby preventing significant fuel damage which could result in the undue release of radioactivity. Since the failure consequences for UO_2 have been shown to be insignificant below fuel energy depositions of 300 cal/gm (Ref. 3), the fuel energy deposition limit of 280 cal/gm provides a margin of safety from significant core damage which would result in release of radioactivity (Refs. 4 and 5). Generic evaluations (Refs. 1, 6, 7, 8 and 9) of a design basis CRDA (i.e., a CRDA resulting in a peak fuel energy deposition of 280 cal/gm) have shown that if the peak fuel enthalpy remains below 280 cal/gm, then the maximum reactor pressure will be less than the required ASME Code limits (Ref. 10) and the calculated offsite doses will be well within the required limits (Ref. 5). The calculated offsite doses remain within the limits since only a small

(continued)

BASES

APPLICABLE
SAFETY ANALYSES
(continued)

number of fuel rods would reach a fuel enthalpy of 170 cal/gm, which is the enthalpy limit for eventual cladding perforation.

edit

Control rod patterns analyzed in Reference 1 follow the banked position withdrawal sequence (BPWS). The BPWS is applicable from the condition of all control rods fully inserted to 10% RTP (Ref. 2). For the BPWS, the control rods are required to be moved in groups, with all control rods assigned to a specific group required to be within specified banked positions (e.g., between notches 08 and 12). The banked positions are established to minimize the maximum incremental control rod worth without being overly restrictive during normal plant operation. Generic analysis of the BPWS (Ref. 1) has demonstrated that the 280 cal/gm fuel energy deposition limit will not be violated during a CRDA while following the BPWS mode of operation. The generic BPWS analysis (Ref. 11) also evaluates the effect of fully inserted, inoperable control rods not in compliance with the sequence, to allow a limited number (i.e., eight) and distribution of fully inserted, inoperable control rods.

The current control rod withdrawal sequence utilized at JAFNPP is known as the Reduced Notch Worth Procedure (RNWP) which was developed to reduce notch worth even further than the BPWS (Ref. 12). The CRDA analyses of References 1, 6, 7, 8, 9 and 11 bound the consequences of a CRDA for these plants following RNWP (Ref. 2).

Rod pattern control satisfies Criterion 3 of 10 CFR 50.36(c)(2)(ii) (Ref. 13).

LCO

Compliance with the prescribed control rod sequences minimizes the potential consequences of a CRDA by limiting the initial conditions to those consistent with the BPWS. This LCO only applies to OPERABLE control rods. For inoperable control rods required to be inserted, separate requirements are specified in LCO 3.1.3, "Control Rod OPERABILITY," consistent with the allowances for inoperable control rods in the BPWS.

(continued)

BASES (continued)

APPLICABILITY

In MODES 1 and 2, when THERMAL POWER is $\leq 10\%$ RTP, the CRDA is a Design Basis Accident and, therefore, compliance with the assumptions of the safety analysis is required. When THERMAL POWER is $> 10\%$ RTP, there is no credible control rod configuration that results in a control rod worth that could exceed the 280 cal/gm fuel energy deposition limit during a CRDA (Ref. 2). In MODES 3, 4, and 5, since the reactor is shut down and only a single control rod can be withdrawn from a core cell containing fuel assemblies, adequate SDM ensures that the consequences of a CRDA are acceptable, since the reactor will remain subcritical with a single control rod withdrawn.

ACTIONS

A.1 and A.2

With one or more OPERABLE control rods not in compliance with the prescribed control rod sequence, actions may be taken to either correct the control rod pattern or declare the associated control rods inoperable within 8 hours. Noncompliance with the prescribed sequence may be the result of "double notching," drifting from a control rod drive cooling water transient, leaking scram valves, or a power reduction to $\leq 10\%$ RTP before establishing the correct control rod pattern. The number of OPERABLE control rods not in compliance with the prescribed sequence is limited to eight, to prevent the operator from attempting to correct a control rod pattern that significantly deviates from the prescribed sequence. When the control rod pattern is not in compliance with the prescribed sequence, all control rod movement should be stopped except for moves needed to correct the rod pattern, or scram if warranted.

Required Action A.1 is modified by a Note which allows the RWM to be bypassed to allow the affected control rods to be returned to their correct position. LCO 3.3.2.1 requires verification of control rod movement by a second licensed operator (Reactor Operator or Senior Reactor Operator) or reactor engineer. This ensures that the control rods will be moved to the correct position. A control rod not in compliance with the prescribed sequence is not considered inoperable except as required by Required Action A.2. OPERABILITY of control rods is determined by compliance with LCO 3.1.3, "Control Rod OPERABILITY," LCO 3.1.4, "Control Rod Scram Times," and LCO 3.1.5, "Control Rod Scram

(continued)

RAY 3.1-06

RAY 3.1-07

BASES

RAI 3.1-07

ACTIONS
(continued)

A.1 and A.2

Accumulators." The allowed Completion Time of 8 hours is reasonable, considering the restrictions on the number of allowed out of sequence control rods and the low probability of a CRDA occurring during the time the control rods are out of sequence.

B.1 and B.2

If nine or more OPERABLE control rods are out of sequence, the control rod pattern significantly deviates from the prescribed sequence. Control rod withdrawal should be suspended immediately to prevent the potential for further deviation from the prescribed sequence. Control rod insertion to correct control rods withdrawn beyond their allowed position is allowed since, in general, insertion of control rods has less impact on control rod worth than withdrawals have. Required Action B.1 is modified by a Note which allows the RWM to be bypassed to allow the affected control rods to be returned to their correct position. LCO 3.3.2.1 requires verification of control rod movement by a second licensed operator (Reactor Operator or Senior Reactor Operator) or reactor engineer.

When nine or more OPERABLE control rods are not in compliance with BPWS, the reactor mode switch must be placed in the shutdown position within 1 hour. With the mode switch in shutdown, the reactor is shut down, and as such, does not meet the applicability requirements of this LCO. The allowed Completion Time of 1 hour is reasonable to allow insertion of control rods to restore compliance, and is appropriate relative to the low probability of a CRDA occurring with the control rods out of sequence.

SURVEILLANCE
REQUIREMENTS

SR 3.1.6.1

The control rod pattern is verified to be in compliance with the BPWS at a 24 hour Frequency to ensure the assumptions of the CRDA analyses are met. The 24 hour Frequency was developed considering that the primary check on compliance with the BPWS is performed by the RWM (LCO 3.3.2.1), which provides control rod blocks to enforce the required sequence and is required to be OPERABLE when operating at $\leq 10\%$ RTP.

(continued)

BASES (continued)

REFERENCES

1. NEDE-24011-P-A-13-US, General Electric Standard Application for Reactor Fuel, Supplement for United States, Sections 2.2.3.1, August 1996.
 2. Letter from T.A. Pickens (BWROG) to G.C. Laines (NRC), Amendment 17 to General Electric Licensing Topical Report NEDE-24011-P-A, BWROG-8644, August 15, 1986.
 3. NUREG-0979, Safety Evaluation Report Related to the Final Design Approval of the GESSAR II, BWR16 Nuclear Island Design (and Supplements 1 through 5), Section 4.2.1.3.2, April 1983.
 4. NUREG-0800, Standard Review Plan for the Review of Safety Analysis Reports for Nuclear Power Plants, Section 15.4.9, Spectrum of Rod Drop Accidents (BWR), Revision 2, July 1981.
 5. 10 CFR 100.
 6. NEDO-10527, Rod Drop Accident Analysis For Large BWRs, March 1972.
 7. NEDO-10527, Supplement 1, Rod Drop Accident Analysis For Large Boiling Water Reactors, Addendum No. 1, Multiple Enrichment Cores With Axial Gadolinium, July 1972.
 8. NEDO-10527, Supplement 2, Rod Drop Accident Analysis For Large Boiling Water Reactors, Addendum No. 2, Exposed Cores, January 1973.
 9. NEDO-21778-A, Transient Pressure Rises Affecting Fracture Toughness Requirements For Boiling Water Reactors, December 1978.
 10. ASME, Boiler and Pressure Vessel Code, Section III, 1965 Edition, Addenda Winter of 1966.
 11. NEDO-21231, Banked Position Withdrawal Sequence, January 1977.
 12. SIL-316, Reduced Notch Worth Procedure, November 1979.
 13. 10 CFR 50.36(c)(2)(ii).
-

B 3.1 REACTIVITY CONTROL SYSTEMS

B 3.1.7 Standby Liquid Control (SLC) System

BASES

BACKGROUND

The SLC System is designed to provide the capability of bringing the reactor, at any time in a fuel cycle, from full power and minimum control rod inventory (which is at the peak of the xenon transient) to a subcritical condition with the reactor in the most reactive, xenon free state without taking credit for control rod movement. The SLC System satisfies the requirements of 10 CFR 50.62 (Ref. 1) on anticipated transient without scram.

The SLC System consists of a boron solution storage tank, two positive displacement pumps, two explosive valves that are provided in parallel for redundancy, and associated piping and valves used to transfer borated water from the storage tank to the reactor pressure vessel (RPV). The borated solution is discharged near the bottom of the core shroud, where it then mixes with the cooling water rising through the core. A smaller tank containing demineralized water is provided for testing purposes.

APPLICABLE SAFETY ANALYSES

The SLC System is manually initiated from the main control room, as directed by the emergency operating procedures, if the operator believes the reactor cannot be shut down, or kept shut down, with the control rods. The SLC System is used in the event that enough control rods cannot be inserted to accomplish shutdown and cooldown in the normal manner. The SLC System injects borated water into the reactor core to add negative reactivity to compensate for all of the various reactivity effects that could occur during plant operations. To meet this objective, it is necessary to inject a quantity of boron, which produces a concentration of 660 ppm of equivalent natural boron, in the reactor coolant at 70°F. To allow for potential leakage and imperfect mixing in the reactor system, an amount of boron equal to 125% of the amount cited above is injected (Ref. 2). The volume versus concentration limits in Figure 3.1.7-1 and the concentration versus temperature limits in Figure 3.1.7-2 are calculated such that the required concentration is achieved accounting for dilution in the RPV with normal water level and including the water

(continued)

BASES

APPLICABLE
SAFETY ANALYSES
(continued)

volume in the residual heat removal shutdown cooling piping and in the recirculation loop piping. This quantity of borated solution is the amount that is above the pump suction level in the boron solution storage tank (6 inches above tank bottom). No credit is taken for the portion of the tank volume that cannot be injected.

The SLC System satisfies Criterion 4 of 10 CFR 50.36(c)(2)(ii) (Ref. 3).

LCO

The OPERABILITY of the SLC System provides backup capability for reactivity control independent of normal reactivity control provisions provided by the control rods. The OPERABILITY of the SLC System is based on the conditions of the borated solution in the storage tank and the availability of a flow path to the RPV, including the OPERABILITY of the pumps and valves. Two SLC subsystems are required to be OPERABLE; each contains an OPERABLE pump, an explosive valve, and associated piping, valves, and instruments and controls to ensure an OPERABLE flow path.

APPLICABILITY

In MODES 1 and 2, shutdown capability is required. In MODES 3 and 4, control rods are not able to be withdrawn since the reactor mode switch is in shutdown and a control rod block is applied. This provides adequate controls to ensure that the reactor remains subcritical. In MODE 5, only a single control rod can be withdrawn from a core cell containing fuel assemblies. Demonstration of adequate SDM (LCO 3.1.1, "SHUTDOWN MARGIN (SDM)") ensures that the reactor will not become critical. Therefore, the SLC System is not required to be OPERABLE when only a single control rod can be withdrawn.

ACTIONS

A.1

If one SLC subsystem is inoperable, the inoperable subsystem must be restored to OPERABLE status within 7 days. In this condition, the remaining OPERABLE subsystem is adequate to perform the shutdown function. However, the overall reliability is reduced because a single failure in the

(continued)

TSTF-367

BASES

ACTIONS

A.1 (continued)

remaining OPERABLE subsystem could result in reduced SLC System shutdown capability. The 7 day Completion Time is based on the availability of an OPERABLE subsystem capable of performing the intended SLC System function and the low probability of a Design Basis Accident (DBA) or severe transient occurring concurrent with the failure of the control rods to shut down the reactor.

B.1

If both SLC subsystems are inoperable, at least one subsystem must be restored to OPERABLE status within 8 hours. The allowed Completion Time of 8 hours is considered acceptable given the low probability of a DBA or severe transient occurring concurrent with the failure of the control rods to shut down the reactor.

C.1

If any Required Action and associated Completion Time is not met, the plant must be brought to a MODE in which the LCO does not apply. To achieve this status, the plant must be brought to MODE 3 within 12 hours. The allowed Completion Time of 12 hours is reasonable, based on operating experience, to reach MODE 3 from full power conditions in an orderly manner and without challenging plant systems.

SURVEILLANCE
REQUIREMENTS

SR 3.1.7.1, SR 3.1.7.2, and SR 3.1.7.3

SR 3.1.7.1 through SR 3.1.7.3 are 24 hour Surveillances verifying certain characteristics of the SLC System (e.g., the volume and temperature of the borated solution in the storage tank), thereby ensuring SLC System OPERABILITY without disturbing normal plant operation. These Surveillances ensure that the proper borated solution volume and temperature, including the temperature of the pump suction piping, are maintained. Maintaining a minimum specified borated solution temperature is important in ensuring that the boron remains in solution and does not precipitate out in the storage tank or in the pump suction

(continued)

BASES

SURVEILLANCE
REQUIREMENTS

SR 3.1.7.1, SR 3.1.7.2, and SR 3.1.7.3 (continued)

pipng. The temperature versus concentration curve of Figure 3.1.7-2 ensures that a 10°F margin will be maintained above the saturation temperature. The 24 hour Frequency is based on operating experience and has shown there are relatively slow variations in the measured parameters of volume and temperature.

SR 3.1.7.4 and SR 3.1.7.6

SR 3.1.7.4 verifies the continuity of the explosive charges in the injection valves to ensure that proper operation will occur if required. Other administrative controls, such as those that limit the shelf life of the explosive charges, must be followed. The 31 day Frequency is based on operating experience and has demonstrated the reliability of the explosive charge continuity.

SR 3.1.7.6 verifies that each valve in the system is in its correct position, but does not apply to the squib (i.e., explosive) valves. Verifying the correct alignment for manual valves in the SLC System flow path provides assurance that the proper flow paths will exist for system operation. A valve is also allowed to be in the nonaccident position provided it can be aligned to the accident position from the control room, or locally by a dedicated operator at the valve control. This is acceptable since the SLC System is a manually initiated system. This Surveillance does not apply to valves that are locked, sealed, or otherwise secured in position since they are verified to be in the correct position prior to locking, sealing, or securing. This verification of valve alignment does not require any testing or valve manipulation; rather, it involves verification that those valves capable of being mispositioned are in the correct position. This SR does not apply to valves that cannot be inadvertently misaligned, such as check valves. The 31 day Frequency is based on engineering judgment and is consistent with the procedural controls governing valve operation that ensures correct valve positions.

(continued)

BASES

SURVEILLANCE
REQUIREMENTS
(continued)SR 3.1.7.5

This Surveillance requires an examination of the sodium pentaborate solution by using chemical analysis to ensure that the proper concentration of boron in the storage tank is maintained per Figure 3.1.7-1. SR 3.1.7.5 must be performed anytime boron or water is added to the storage tank solution to determine that the boron solution concentration is within the specified limits. SR 3.1.7.5 must also be performed anytime the temperature is restored to within the limits of Figure 3.1.7-2, to ensure that no significant boron precipitation occurred. The 31 day Frequency of this Surveillance is appropriate because of the relatively slow variation of boron concentration between surveillances.

SR 3.1.7.7

Demonstrating that each SLC System pump develops a flow rate ≥ 50 gpm at a discharge pressure ≥ 1275 psig by recirculating demineralized water to the test tank ensures that pump performance has not degraded during the surveillance interval. This minimum pump flow rate requirement ensures that, when combined with the sodium pentaborate solution concentration requirements, the rate of negative reactivity insertion from the SLC System will adequately compensate for the positive reactivity effects encountered during power reduction, cooldown of the moderator, and xenon decay. This test confirms pump and motor capability and is indicative of overall performance. Such inservice tests confirm component OPERABILITY, trend performance, and detect incipient failures by indicating abnormal performance. The Frequency of this Surveillance is in accordance with the Inservice Testing Program.

SR 3.1.7.8 and SR 3.1.7.9

These Surveillances ensure that there is a functioning flow path from the boron solution storage tank to the RPV, including the firing of an explosive valve primer assembly. The replacement primer assembly for the explosive valves shall be from the same manufactured batch as the one fired or from another batch that has been certified by having one of that batch successfully fired. The pump and explosive

(continued)

BASES

SURVEILLANCE
REQUIREMENTS

SR 3.1.7.8 and SR 3.1.7.9 (continued)

valve pathway tested should be alternated such that both complete flow paths are tested every 48 months at alternating 24 month intervals. The Surveillance may be performed in separate steps to prevent injecting boron into the RPV. An acceptable method for verifying flow from the pump to the RPV is to pump demineralized water from a test tank through one SLC subsystem and into the RPV. The 24 month Frequency is based on the need to perform this Surveillance under the conditions that apply during a plant outage and the potential for an unplanned transient if the Surveillance were performed with the reactor at power. Operating experience has shown these components usually pass the Surveillance when performed at the 24 month Frequency; therefore, the Frequency was concluded to be acceptable from a reliability standpoint.

Demonstrating that all heat traced piping between the boron solution storage tank and the suction inlet to the injection pumps is unblocked ensures that there is a functioning flow path for injecting the sodium pentaborate solution. An acceptable method for verifying that the suction piping is unblocked is to manually initiate the system, except the explosive valves, and pump from the storage tank to the test tank. Upon completion of this verification, the pump suction piping must be flushed with demineralized water to ensure piping between the storage tank and pump suction is unblocked.

The 24 month Frequency is acceptable since there is a low probability that the subject piping will be blocked due to precipitation of the boron from solution in the heat traced piping. This is especially true in light of the temperature verification of this piping required by SR 3.1.7.3. However, if, in performing SR 3.1.7.3, it is determined that the temperature of this piping has fallen below the specified minimum, SR 3.1.7.9 must be performed once within 24 hours after the piping temperature is restored to within the limits of Figure 3.1.7-2.

SR 3.1.7.10

Enriched sodium pentaborate solution is made by mixing granular, enriched sodium pentaborate with water. Isotopic

(continued)

BASES

SURVEILLANCE
REQUIREMENTS

SR 3.1.7.10 (continued)

tests on the granular sodium pentaborate to verify the actual B-10 enrichment must be performed prior to addition to the SLC tank in order to ensure that the proper B-10 atom percentage is being used. A single isotopic test from a single batch can suffice as the required analysis for any number of mixings and additions from this batch. Certified vendor analytical test results may be used to satisfy this requirement.

A

SR 3.1.7.11

The B-10 enrichment of boron in solution in the SLC tank is only affected by the B-10 enrichment of tank additions. The requirements of SR 3.1.7.10 serve to assure that tank additions contain the proper enrichment. SR 3.1.7.11 requires periodic verification of the B-10 enrichment of the solution in the SLC tank, providing added assurance that the proper B-10 enrichment is maintained.

3
1
2
✓

REFERENCES

1. 10 CFR 50.62.
 2. UFSAR, Section 3.9.4.
 3. 10 CFR 50.36(c)(2)(ii).
-
-

B 3.1 REACTIVITY CONTROL SYSTEMS

B 3.1.8 Scram Discharge Volume (SDV) Vent and Drain Valves

BASES

BACKGROUND

The SDV vent and drain valves are normally open and discharge any accumulated water in the SDV to ensure that sufficient volume is available at all times to allow a complete scram. During a scram, the SDV vent and drain valves close to contain reactor water. The SDV is a volume of header piping that connects to each hydraulic control unit (HCU) and drains into an instrument volume. There are two SDVs (headers) and two instrument volumes, each receiving approximately one half of the control rod drive (CRD) discharges. Each instrument volume has a drain line each having two valves in series for a total of four drain valves. Each header is connected to a separate vent line each having two valves in series for a total of four vent valves. The header piping is sized to receive and contain all the water discharged by the CRDs during a scram. The design and functions of the SDV are described in Reference 1.

APPLICABLE
SAFETY ANALYSES

The Design Basis Accident and transient analyses assume all of the control rods are capable of scrambling. The acceptance criteria for the SDV vent and drain valves are that they operate automatically to:

- a. Close during scram to limit the amount of reactor coolant discharged so that adequate core cooling is maintained and offsite doses remain within the limits of 10 CFR 100 (Ref. 2); and
- b. Open on scram reset to maintain the SDV vent and drain path open so that there is sufficient volume to accept the reactor coolant discharged during a scram.

Isolation of the SDV can also be accomplished by manual closure of the SDV valves. Additionally, the discharge of reactor coolant to the SDV can be terminated by scram reset or closure of the HCU manual isolation valves. For a bounding leakage case, the offsite doses are well within the limits of 10 CFR 100 (Ref. 2), and adequate core cooling is maintained (Ref. 3). The SDV vent and drain valves allow

(continued)

BASES

APPLICABLE
SAFETY ANALYSES
(continued)

continuous drainage of the SDV during normal plant operation to ensure that the SDV has sufficient capacity to contain the reactor coolant discharge during a full core scram. To automatically ensure this capacity, a reactor scram (LCO 3.3.1.1, "Reactor Protection System (RPS) Instrumentation") is initiated if the SDV water level in the instrument volume exceeds a specified setpoint. The setpoint is chosen so that all control rods are inserted before the SDV has insufficient volume to accept a full scram.

SDV vent and drain valves satisfy Criterion 3 of 10 CFR 50.36(c)(2)(ii) (Ref. 4).

LCO

The OPERABILITY of all SDV vent and drain valves ensures that the SDV vent and drain valves will close during a scram to contain reactor water discharged to the SDV piping. Since the vent and drain lines are provided with two valves in series, the single failure of one valve in the open position will not impair the isolation function of the system. Additionally, the valves are required to open on scram reset to ensure that a path is available for the SDV piping to drain freely at other times.

APPLICABILITY

In MODES 1 and 2, scram may be required; therefore, the SDV vent and drain valves must be OPERABLE. In MODES 3 and 4, control rods are not able to be withdrawn since the reactor mode switch is in shutdown and a control rod block is applied. Also, during MODE 5, only a single control rod can be withdrawn from a core cell containing fuel assemblies. Therefore, the SDV vent and drain valves are not required to be OPERABLE in these MODES since the reactor is subcritical and only one rod may be withdrawn and subject to scram.

ACTIONS

The ACTIONS Table is modified by a Note indicating that a separate Condition entry is allowed for each SDV vent and drain line. This is acceptable, since the Required Actions provide appropriate compensatory actions for each inoperable SDV line. Complying with the Required Actions may allow for

(continued)

BASES

ACTIONS
(continued)

continued operation, and subsequent inoperable SDV lines are governed by subsequent Condition entry and application of associated Required Actions.

The ACTIONS Table is modified by a second Note stating that an isolated line may be unisolated under administrative control to allow draining and venting of the SDV. When a line is isolated, the potential for an inadvertent scram due to high SDV level is increased. During these periods, the line may be unisolated under administrative control. This allows any accumulated water in the line to be drained, to preclude a reactor scram on SDV high level. This is acceptable since the administrative controls ensure the valve can be closed quickly, by a dedicated operator, if a scram occurs with the valve open.

A.1

When one SDV vent or drain valve is inoperable in one or more lines the line must be isolated to contain the reactor coolant during a scram. The 7 day Completion Time is reasonable, given the level of redundancy in the lines and the low probability of a scram occurring while the valve(s) are inoperable and the lines are not isolated. The SDV is still isolable since the redundant valve in the affected line is OPERABLE. During these periods, the single failure criterion is not met, and a higher risk exists to allow reactor water out of the primary system during a scram.

B.1

If both valves in a line are inoperable, the line must be isolated to contain the reactor coolant during a scram. The 8 hour Completion Time to isolate the line is based on the low probability of a scram occurring while the line is not isolated and the unlikelihood of significant CRD seal leakage.

C.1

If any Required Action and associated Completion Time is not met, the plant must be brought to a MODE in which the LCO does not apply. To achieve this status, the plant must be

(continued)

BASES

ACTIONS

C.1 (continued)

brought to at least MODE 3 within 12 hours. The allowed Completion Time of 12 hours is reasonable, based on operating experience, to reach MODE 3 from full power conditions in an orderly manner and without challenging plant systems.

SURVEILLANCE
REQUIREMENTS

SR 3.1.8.1

During normal operation, the SDV vent and drain valves should be in the open position (except when performing SR 3.1.8.2) to allow for drainage of the SDV piping. Verifying that each valve is in the open position ensures that the SDV vent and drain valves will perform their intended functions during normal operation. This SR does not require any testing or valve manipulation; rather, it involves verification that the valves are in the correct position.

The 31 day Frequency is based on engineering judgment and is consistent with the procedural controls governing valve operation, which ensure correct valve positions.

SR 3.1.8.2

During a scram, the SDV vent and drain valves should close to contain the reactor water discharged to the SDV piping. Cycling each valve through its complete range of motion (closed and open) ensures that the valve will function properly during a scram. The Frequency is in accordance with the Inservice Testing Program requirements.

SR 3.1.8.3

SR 3.1.8.3 is an integrated test of the SDV vent and drain valves to verify total system performance. After receipt of a simulated or actual scram signal, the closure of the SDV vent and drain valves is verified. The closure time of 30 seconds after receipt of a scram signal is based on the bounding leakage case evaluated in the accident analysis

(continued)

BASES

**SURVEILLANCE
REQUIREMENTS**

SR 3.1.8.3 (continued)

(Ref. 3). Similarly, after receipt of a simulated or actual scram reset signal, the opening of the SDV vent and drain valves is verified. The LOGIC SYSTEM FUNCTIONAL TEST in LCO 3.3.1.1 and the scram time testing of control rods in LCO 3.1.3 overlap this Surveillance to provide complete testing of the assumed safety function. The 24 month Frequency is based on the need to perform this Surveillance under the conditions that apply during a plant outage and the potential for an unplanned transient if the Surveillance were performed with the reactor at power. Operating experience and analysis has shown these components pass the Surveillance when performed at the 24 month Frequency; therefore, the Frequency was concluded to be acceptable from a reliability standpoint.

REFERENCES

1. UFSAR, Section 3.5.5.2.
 2. 10 CFR 100.
 3. NUREG-0803, Generic Safety Evaluation Report Regarding Integrity of BWR Scram System Piping, August 1981.
 4. 10 CFR 50.36(c)(2)(ii).
-
-

B 3.2 POWER DISTRIBUTION LIMITS

B 3.2.1 AVERAGE PLANAR LINEAR HEAT GENERATION RATE (APLHGR)

BASES

BACKGROUND

The APLHGR is a measure of the average LHGR of all the fuel rods in a fuel assembly at any axial location. Limits on the APLHGR are specified to ensure that the fuel design limits identified in Reference 1 are not exceeded during abnormal operational transients and that the peak cladding temperature (PCT) during the postulated Design Basis loss of coolant accident (LOCA) does not exceed the limits specified in 10 CFR 50.46.

APPLICABLE SAFETY ANALYSES

The analytical methods and assumptions used in evaluating the fuel design limits are presented in References 1 and 2. The analytical methods and assumptions used in evaluating Design Basis Accidents (DBAs), abnormal operational transients, and normal operation that determine the APLHGR limits are presented in References 1, 2, 3, 4, 5, 6, 7, and 8.

Fuel design evaluations are performed to demonstrate that the 1% limit on the fuel cladding plastic strain and other fuel design limits described in Reference 1 are not exceeded during abnormal operational transients for operation with LHGRs up to the operating limit LHGR. APLHGR limits are equivalent to the LHGR limit for each fuel rod divided by the local peaking factor of the fuel assembly. APLHGR limits are developed as a function of exposure to ensure adherence to fuel design limits during the limiting abnormal operational transients (Refs. 5, 6, and 7).

LOCA analyses are then performed to ensure that the above determined APLHGR limits are adequate to meet the PCT and maximum oxidation limits of 10 CFR 50.46. The analysis is performed using calculational models that are consistent with the requirements of 10 CFR 50, Appendix K. A complete discussion of the analysis code is provided in Reference 8. The PCT following a postulated LOCA is a function of the average heat generation rate of all the rods of a fuel assembly at any axial location and is not strongly influenced by the rod to rod power distribution within an

(continued)

BASES

APPLICABLE
SAFETY ANALYSES
(continued)

assembly. The APLHGR limits specified are equivalent to the LHGR of the highest powered fuel rod assumed in the LOCA analysis divided by its local peaking factor. A conservative multiplier is applied to the LHGR assumed in the LOCA analysis to account for the uncertainty associated with the measurement of the APLHGR.

For single recirculation loop operation, a conservative multiplier of 0.84 is applied to the exposure dependent APLHGR limits for two loop operation (Ref. 5, 7 and 8). This maximum limit is due to the conservative analysis assumption of an earlier departure from nucleate boiling with one recirculation loop available, resulting in a more severe cladding heatup during a LOCA.

The APLHGR satisfies Criterion 2 of 10 CFR 50.36(c)(2)(ii) (Ref. 9).

LCO

The APLHGR limits specified in the COLR are the result of the fuel design, and DBA and transient analyses. For two recirculation loops operating, the limit is determined for each lattice type as a function of average planar exposure and is approved by the NRC. With only one recirculation loop in operation, in conformance with the requirements of LCO 3.4.1, "Recirculation Loops Operating," the limit is determined by multiplying the exposure dependent APLHGR limit by a conservative multiplier determined by a specific single recirculation loop analysis (Ref. 5).

APPLICABILITY

The APLHGR limits are primarily derived from fuel design evaluations and analyses of LOCAs and transients that are assumed to occur at high power levels. Design calculations and operating experience have shown that as power is reduced, the margin to the required APLHGR limits increases. This trend continues down to the power range of 5% to 15% RTP when entry into MODE 2 occurs. When in MODE 2, the intermediate range monitor scram function provides prompt scram initiation during any significant transient, thereby effectively removing any APLHGR limit compliance concern in MODE 2. Therefore, at THERMAL POWER levels < 25% RTP, the reactor is operating with substantial margin to the APLHGR limits; thus, this LCO is not required.

(continued)

BASES (continued)

ACTIONS

A.1

If any APLHGR exceeds the required limits, an assumption regarding an initial condition of the DBA and transient analyses may not be met. Therefore, prompt action should be taken to restore the APLHGR(s) to within the required limits such that the plant operates within analyzed conditions and within design limits of the fuel rods. The 2 hour Completion Time is sufficient to restore the APLHGR(s) to within its limits and is acceptable based on the low probability of a transient or DBA occurring simultaneously with the APLHGR out of specification.

B.1

If the APLHGR cannot be restored to within its required limits within the associated Completion Time, the plant must be brought to a MODE or other specified condition in which the LCO does not apply. To achieve this status, THERMAL POWER must be reduced to < 25% RTP within 4 hours. The allowed Completion Time is reasonable, based on operating experience, to reduce THERMAL POWER to < 25% RTP in an orderly manner and without challenging plant systems.

SURVEILLANCE
REQUIREMENTS

SR 3.2.1.1

APLHGRs are required to be initially calculated within 12 hours after THERMAL POWER is \geq 25% RTP and then every 24 hours thereafter. They are compared to the specified limits in the COLR to ensure that the reactor is operating within the assumptions of the safety analysis. The 24 hour Frequency is based on the recognition of the slowness of changes in power distribution during normal operation. The 12 hour allowance after THERMAL POWER \geq 25% RTP is achieved is acceptable given the large inherent margin to operating limits at low power levels.

(continued)

BASES (continued)

- REFERENCES
1. NEDE-24011-P-A-13, General Electric Standard Application for Reactor Fuel, August 1996.
 2. UFSAR, Chapter 3.
 3. UFSAR, Chapter 6.
 4. UFSAR, Chapter 14.
 5. NEDO-24281, FitzPatrick Nuclear Power Plant Single-Loop Operation, August 1980.
 6. NEDO-24243, General Electric Boiling Water Reactor Load Line Limit Analysis For James A. FitzPatrick Nuclear Power Plant, February 1980.
 7. NEDC-32016P, Power Uprate Safety Analysis For The James A. FitzPatrick Nuclear Power Plant, December, 1991.
 8. NEDC-31317P, Revision 2, James A. FitzPatrick Nuclear Power Plant SAFER/GESTR-LOCA Loss-of-Coolant Accident Analysis, April 1993.
 9. 10 CFR 50.36(c)(2)(ii).
-

B 3.2 POWER DISTRIBUTION LIMITS

B 3.2.2 MINIMUM CRITICAL POWER RATIO (MCPR)

BASES

BACKGROUND

MCPR is a ratio of the fuel assembly power that would result in the onset of boiling transition to the actual fuel assembly power. The MCPR Safety Limit (SL) is set such that 99.9% of the fuel rods avoid boiling transition if the limit is not violated (refer to the Bases for SL 2.1.1.2). The operating limit MCPR is established to ensure that no fuel damage results during abnormal operational transients. Although fuel damage does not necessarily occur if a fuel rod actually experienced boiling transition (Ref. 1), the critical power at which boiling transition is calculated to occur has been adopted as a fuel design criterion.

The onset of transition boiling is a phenomenon that is readily detected during the testing of various fuel bundle designs. Based on these experimental data, correlations have been developed to predict critical bundle power (i.e., the bundle power level at the onset of transition boiling) for a given set of plant parameters (e.g., reactor vessel pressure, flow, and subcooling). Because plant operating conditions and bundle power levels are monitored and determined relatively easily, monitoring the MCPR is a convenient way of ensuring that fuel failures due to inadequate cooling do not occur.

APPLICABLE
 SAFETY ANALYSES

The analytical methods and assumptions used in evaluating the abnormal operational transients to establish the operating limit MCPR are presented in References 2, 3, 4, 5, 6, 7, and 8. To ensure that the MCPR SL is not exceeded during any transient event that occurs with moderate frequency, limiting transients have been analyzed to determine the largest reduction in critical power ratio (CPR). The types of transients evaluated are loss of flow, increase in pressure and power, positive reactivity insertion, and coolant temperature decrease. The limiting transient yields the largest change in CPR (Δ CPR). When the largest Δ CPR is added to the MCPR SL, the required operating limit MCPR is obtained.

(continued)

BASES

APPLICABLE
SAFETY ANALYSES
(continued)

The MCPR operating limits derived from the transient analysis are dependent on the operating core flow and core exposure to ensure adherence to fuel design limits during the worst transient that occurs with moderate frequency (Refs. 6, 7, and 8). A generator load reject without bypass and a feedwater controller transient normally result in the worst case MCPR transients for a given fuel cycle. During operations at low core flows the MCPR operating limit must be increased by a factor of K_r (specified in the COLR) which is derived from the recirculation flow runout transient and is a function of core flow. This will ensure the MCPR safety limit is not exceeded during a recirculation flow runout event.

The MCPR satisfies Criterion 2 of 10 CFR 50.36(c)(2)(ii) (Ref. 9).

LCO

The MCPR operating limits specified in the COLR are the result of the Design Basis Accident (DBA) and transient analysis. The operating limit MCPR is a function of exposure, control rod scram times and core flow. The MCPR values for each fuel assembly must remain above the operating limit MCPR.

APPLICABILITY

The MCPR operating limits are primarily derived from the analyses of transients that are assumed to occur at high power levels. Below 25% RTP, the reactor is operating at a minimum recirculation pump speed and the moderator void ratio is small. Surveillance of thermal limits below 25% RTP is unnecessary due to the large inherent margin that ensures that the MCPR SL is not exceeded even if a limiting transient occurs. Statistical analyses indicate that the nominal value of the initial MCPR expected at 25% RTP is > 3.5 . Studies of the variation of limiting transient behavior have been performed over the range of power and flow conditions. These studies encompass the range of actual values for key plant parameters important to typically limiting transients. The results of these studies demonstrate that a margin is expected between performance and the MCPR requirements, and that margins increase as power is reduced to 25% RTP. This trend is expected to

(continued)

BASES

APPLICABILITY
(continued)

continue to the 5% to 15% power range when entry into MODE 2 occurs. When in MODE 2, the intermediate range monitor provides rapid scram initiation for any significant power increase transient, which effectively eliminates any MCPR compliance concern. Therefore, at THERMAL POWER levels < 25% RTP, the reactor is operating with substantial margin to the MCPR limits and this LCO is not required.

ACTIONS

A.1

If any MCPR is outside the required limits, an assumption regarding an initial condition of the design basis transient analyses may not be met. Therefore, prompt action should be taken to restore the MCPR(s) to within the required limits such that the plant remains operating within analyzed conditions. The 2 hour Completion Time is normally sufficient to restore the MCPR(s) to within its limits and is acceptable based on the low probability of a transient or DBA occurring simultaneously with the MCPR out of specification.

B.1

If the MCPR cannot be restored to within its required limits within the associated Completion Time, the plant must be brought to a MODE or other specified condition in which the LCO does not apply. To achieve this status, THERMAL POWER must be reduced to < 25% RTP within 4 hours. The allowed Completion Time is reasonable, based on operating experience, to reduce THERMAL POWER to < 25% RTP in an orderly manner and without challenging plant systems.

SURVEILLANCE
REQUIREMENTS

SR 3.2.2.1

The MCPR is required to be initially calculated within 12 hours after THERMAL POWER is \geq 25% RTP and then every 24 hours thereafter. It is compared to the specified limits in the COLR to ensure that the reactor is operating within the assumptions of the safety analysis. The 24 hour Frequency is based on the recognition of the slowness of changes in power distribution during normal operation.

(continued)

BASES

SURVEILLANCE
REQUIREMENTS

SR 3.2.2.1 (continued)

The 12 hour allowance after THERMAL POWER \geq 25% RTP is achieved is acceptable given the large inherent margin to operating limits at low power levels.

SR 3.2.2.2

Because the transient analysis takes credit for conservatism in the scram speed performance, it must be demonstrated that the specific scram speed distribution is consistent with that used in the transient analysis. SR 3.2.2.2 determines the value of T , which is a measure of the actual scram speed distribution compared with the assumed distribution. The MCPR operating limit is then determined based on an interpolation between the applicable limits for Option A (scram times of LCO 3.1.4, "Control Rod Scram Times") and Option B (realistic scram times) analyses. The parameter T must be determined once within 72 hours after each set of scram time tests required by SR 3.1.4.1, SR 3.1.4.2, and SR 3.1.4.4 because the effective scram speed distribution may change during the cycle or after maintenance that could affect scram times. The 72 hour Completion Time is acceptable due to the relatively minor changes in T expected during the fuel cycle.

REFERENCES

1. NUREG-0562, Fuel Rod Failure as a Consequence of Departure From Nucleate Boiling or Dry Out, June 1979.
2. NEDE-24011-P-A-13, General Electric Standard Application for Reactor Fuel, August 1996.
3. UFSAR, Chapter 3.
4. UFSAR, Chapter 6.
5. UFSAR, Chapter 14.
6. NEDO-24281, FitzPatrick Nuclear Power Plant Single-Loop Operation, August 1980.

(continued)

BASES

REFERENCES
(continued)

7. NEDO-24243, General Electric Boiling Water Reactor Load Line Limit Analysis For James A. FitzPatrick Nuclear Power Plant, February 1980.
 8. NEDC-32016P, Power Uprate Safety Analysis For The James A. FitzPatrick Nuclear Power Plant, December 1991.
 9. 10 CFR 50.36(c)(2)(ii).
-
-

B 3.2 POWER DISTRIBUTION LIMITS

B 3.2.3 LINEAR HEAT GENERATION RATE (LHGR)

BASES

BACKGROUND

The LHGR is a measure of the heat generation rate of a fuel rod in a fuel assembly at any axial location. Limits on LHGR are specified to ensure that fuel design limits are not exceeded anywhere in the core during normal operation, including abnormal operational transients. Exceeding the LHGR limit could potentially result in fuel damage and subsequent release of radioactive materials. Fuel design limits are specified to ensure that fuel system damage, fuel rod failure, or inability to cool the fuel does not occur during the anticipated operating conditions identified in Reference 1.

APPLICABLE SAFETY ANALYSES

The analytical methods and assumptions used in evaluating the fuel system design are presented in Reference 2. The fuel assembly is designed to ensure (in conjunction with the core nuclear and thermal hydraulic design, plant equipment, instrumentation, and protection systems) that fuel damage will not result in the release of radioactive materials in excess of the guidelines of 10 CFR Parts 20, 50, and 100. The mechanisms that could cause fuel damage during abnormal operational transients and that are considered in fuel evaluations are:

- a. Rupture of the fuel rod cladding caused by strain from the relative expansion of the UO_2 pellet; and
- b. Severe overheating of the fuel rod cladding caused by inadequate cooling.

A value of 1% plastic strain of the fuel cladding has been defined as the limit below which fuel damage caused by overstraining of the fuel cladding is not expected to occur (Ref. 2).

Fuel design evaluations have been performed and demonstrate that the 1% fuel cladding plastic strain design limit is not exceeded during continuous operation with LHGRs up to

(continued)

BASES

APPLICABLE
SAFETY ANALYSES
(continued)

the operating limit specified in the COLR. The analysis also includes allowances for short term transient operation above the operating limit to account for abnormal operational transients, plus an allowance for densification power spiking.

The LHGR satisfies Criterion 2 of 10 CFR 50.36(c)(2)(ii) (Ref. 3).

LCO

The LHGR is a basic assumption in the fuel design analysis. The fuel has been designed to operate at rated core power with sufficient design margin to the LHGR calculated to cause a 1% fuel cladding plastic strain. The operating limit to accomplish this objective is specified in the COLR.

APPLICABILITY

The LHGR limits are derived from fuel design analysis that is limiting at high power level conditions. At core thermal power levels < 25% RTP, the reactor is operating with a substantial margin to the LHGR limits and, therefore, the Specification is only required when the reactor is operating at \geq 25% RTP.

ACTIONS

A.1

If any LHGR exceeds its required limit, an assumption regarding an initial condition of the fuel design analysis is not met. Therefore, prompt action should be taken to restore the LHGR(s) to within its required limits such that the plant is operating within analyzed conditions. The 2 hour Completion Time is normally sufficient to restore the LHGR(s) to within its limits and is acceptable based on the low probability of a transient or Design Basis Accident occurring simultaneously with the LHGR out of specification.

B.1

If the LHGR cannot be restored to within its required limits within the associated Completion Time, the plant must be brought to a MODE or other specified condition in which the

(continued)

BASES

ACTIONS

B.1 (continued)

LCO does not apply. To achieve this status, THERMAL POWER is reduced to < 25% RTP within 4 hours. The allowed Completion Time is reasonable, based on operating experience, to reduce THERMAL POWER TO < 25% RTP in an orderly manner and without challenging plant systems.

SURVEILLANCE
REQUIREMENTS

SR 3.2.3.1

The LHGR is required to be initially calculated within 12 hours after THERMAL POWER is \geq 25% RTP and then every 24 hours thereafter. It is compared to the specified limits in the COLR to ensure that the reactor is operating within the assumptions of the safety analysis. The 24 hour Frequency is based on the recognition of the slow changes in power distribution during normal operation. The 12 hour allowance after THERMAL POWER \geq 25% RTP is achieved is acceptable given the large inherent margin to operating limits at lower power levels.

REFERENCES

1. UFSAR, Section 14.5.
 2. UFSAR, Section 3.2.
 3. 10 CFR 50.36(c)(2)(ii).
-
-

B 3.2 POWER DISTRIBUTION LIMITS

B 3.2.4 Average Power Range Monitor (APRM) Gain and Setpoint

BASES

BACKGROUND

The OPERABILITY of the APRMs and their setpoints is an initial condition of all safety analyses that assume rod insertion upon reactor scram. Applicable design criteria is discussed in UFSAR, Section 16.6 (Ref. 1). This LCO is provided to require the APRM gain or APRM Neutron Flux-High (Flow Biased) Function Allowable Value (LCO 3.3.1.1, "Reactor Protection System (RPS) Instrumentation", Function 2.b) to be adjusted when operating under conditions of excessive power peaking to maintain acceptable margin to the fuel cladding integrity Safety Limit (SL) and the fuel cladding 1% plastic strain limit.

The condition of excessive power peaking is determined by the ratio of the actual power peaking to the limiting power peaking at RTP. This ratio is equal to the ratio of the core limiting MFLPD to the Fraction of RTP (FRTP), where FRTP is the measured THERMAL POWER divided by the RTP. Excessive power peaking exists when:

$$\frac{\text{MFLPD}}{\text{FRTP}} > 1.$$

indicating that MFLPD is not decreasing proportionately to the overall power reduction, or conversely, that power peaking is increasing. To maintain margins similar to those at RTP conditions, the excessive power peaking is compensated by a gain adjustment on the APRMs or adjustment of the APRM Neutron Flux-High (Flow Biased) Function Allowable Value. Either of these adjustments has effectively the same result as maintaining MFLPD less than or equal to FRTP and thus maintains RTP margins for APLHGR, MCPR, and LHGR.

The normally selected APRM Neutron Flux-High (Flow-Biased) Function Allowable Value positions the scram above the upper bound of the normal power/flow operating region that has been considered in the design of the fuel rods. The Allowable Value is flow biased with a slope that approximates the upper flow control line, such that an approximately constant margin is maintained between the flow biased trip level and the upper operating boundary for core

(continued)

BASES

BACKGROUND
(continued)

flows in excess of about 45% of rated core flow. In the range of infrequent operations below 45% of rated core flow, the margin to scram is reduced because of the nonlinear core flow versus drive flow relationship. The normally selected APRM Allowable Value is supported by the analyses presented in References 2 and 3 that concentrate on events initiated from rated conditions. Design experience has shown that minimum deviations occur within expected margins to operating limits (APLHGR, MCPR, and LHGR), at rated conditions for normal power distributions. However, at other than rated conditions, control rod patterns can be established that significantly reduce the margin to thermal limits. Therefore, the APRM Neutron Flux-High (Flow Biased) Function Allowable Value may be reduced during operation when the combination of THERMAL POWER and MFLPD indicates an excessive power peaking distribution. In addition, the APRM Neutron Flux-High (Flow Biased) Function provides protection from reactor thermal hydraulic instability consistent with Boiling Water Reactors Owners' Group Long-Term Solution, Option I-D (Refs. 4, 5 and 6).

APPLICABLE
SAFETY ANALYSES

The acceptance criteria for the APRM gain or setpoint adjustments are that acceptable margins (to APLHGR, MCPR, and LHGR) be maintained to the fuel cladding integrity SL and the fuel cladding 1% plastic strain limit.

The safety analyses (Refs. 2 and 3) concentrate on the rated power condition for which the minimum expected margin to the operating limits (APLHGR, MCPR, and LHGR) occurs. LCO 3.2.1, "AVERAGE PLANAR LINEAR HEAT GENERATION RATE (APLHGR)," and LCO 3.2.2, "MINIMUM CRITICAL POWER RATIO (MCPR)", and LCO 3.2.3, "Linear Heat Generation Rate (LHGR)", limit the initial margins to these operating limits at rated conditions so that specified acceptable fuel design limits are met during transients initiated from rated conditions. At initial power levels less than rated levels, the margin degradation of either the APLHGR, the MCPR, or the LHGR during a transient can be greater than at the rated condition event. This greater margin degradation during the transient is primarily offset by the larger initial margin to limits at the lower than rated power levels. However, power distributions can be hypothesized that would result in reduced margins to the pre-transient operating limit. When combined with the increased severity of certain transients

(continued)

BASES

APPLICABLE
SAFETY ANALYSES
(continued)

at other than rated conditions, the SLs could be approached. At substantially reduced power levels, highly peaked power distributions could be obtained that could reduce thermal margins to the minimum levels required for transient events. To prevent or mitigate such situations, either the APRM gain is adjusted upward by the ratio of the core limiting MFLPD to the FRTP, or the APRM Neutron Flux-High (Flow Biased) Function Allowable Value is required to be reduced by the ratio of FRTP to the core limiting MFLPD. Either of these adjustments effectively counters the increased severity of some events at other than rated conditions by proportionally increasing the APRM gain or proportionally lowering the APRM Neutron Flux-High (Flow Biased) Function Allowable Value, dependent on the increased peaking that may be encountered.

The reactor thermal hydraulic stability analyses (Ref. 6) indicates that the APRM Neutron Flux-High (Flow Biased) Function will suppress power oscillations prior to exceeding the fuel safety limit (MCPR). This protection is provided at a high statistical confidence level for core wide mode oscillations and at a nominal statistical confidence level for regional mode oscillations. This protection is adequate since core wide oscillation is the dominant mode because the plant is designed with relatively tight fuel inlet orificing (Ref. 4).

The APRM gain and setpoints satisfy Criteria 2 and 3 of 10 CFR 50.36(c)(2)(ii) (Ref. 7):

LCO

Meeting any one of the following conditions ensures acceptable operating margins for events described above:

- a. Limiting excess power peaking;
- b. Reducing the APRM Neutron Flux-High (Flow Biased) Function Allowable Value by multiplying the APRM Neutron Flux-High (Flow Biased) Function Allowable Value by the ratio of FRTP and the core limiting value of MFLPD; or

(continued)

BASES

LCO
(continued)

- c. Increasing APRM gains to cause the APRM to read greater than 100% times MFLPD. This condition is to account for the reduction in margin to the fuel cladding integrity SL and the fuel cladding 1% plastic strain limit.

MFLPD is the ratio of the limiting LHGR to the LHGR limit for the specific bundle type. As power is reduced, if the design power distribution is maintained, MFLPD is reduced in proportion to the reduction in power. However, if power peaking increases above the design value, the MFLPD is not reduced in proportion to the reduction in power. Under these conditions, the APRM gain is adjusted upward or the APRM Neutron Flux-High (Flow Biased) Function Allowable Value is reduced accordingly. When the reactor is operating with peaking less than the design value, it is not necessary to modify the APRM Neutron Flux-High (Flow Biased) Function Allowable Value. Adjusting APRM gain or modifying the Neutron Flux-High (Flow Biased) Function Allowable Value is equivalent to maintaining MFLPD less than or equal to FRTP, as stated in the LCO.

For compliance with LCO Item b (APRM Neutron Flux-High (Flow Biased) Function Allowable Value modification) or Item c (APRM gain adjustment), only APRMs required to be OPERABLE per LCO 3.3.1.1, Function 2.b are required to be modified or adjusted. In addition, each APRM may be allowed to have its gain or Allowable Value adjusted or modified independently of other APRMs that are having their gain or Allowable Value adjusted.

APPLICABILITY

The MFLPD limit, APRM gain adjustment, and APRM Neutron Flux-High (Flow Biased) Function Allowable Value modification is provided to ensure that the fuel cladding integrity SL and the fuel cladding 1% plastic strain limit are not violated during design basis transients. As discussed in the Bases for LCO 3.2.1 and LCO 3.2.2, sufficient margin to these limits exists below 25% RTP and, therefore, these requirements are only necessary when the reactor is operating at $\geq 25\%$ RTP.

(continued)

BASES (continued)

ACTIONS

A.1

If the APRM gain or Neutron Flux-High (Flow Biased) Function Allowable Value is not within limits while the MFLPD has exceeded FRTM, the margin to the fuel cladding integrity SL and the fuel cladding 1% plastic strain limit may be reduced. Therefore, prompt action should be taken to restore the MFLPD to within its required limit or make acceptable APRM adjustments such that the plant is operating within the assumed margin of the safety analyses.

The 6 hour Completion Time is normally sufficient to restore either the MFLPD to within limits or the APRM gain or Neutron Flux-High (Flow Biased) Function Allowable Value to within limits and is acceptable based on the low probability of a transient or Design Basis Accident occurring simultaneously with the LCO not met.

B.1

If MFLPD, APRM gain, or Neutron Flux-High (Flow Biased) Function Allowable Value cannot be restored to within its required limits within the associated Completion Time, the plant must be brought to a MODE or other specified condition in which the LCO does not apply. To achieve this status, THERMAL POWER is reduced to < 25% RTP within 4 hours. The allowed Completion Time is reasonable, based on operating experience, to reduce THERMAL POWER to < 25% RTP in an orderly manner and without challenging plant systems.

SURVEILLANCE
REQUIREMENTS

SR 3.2.4.1 and SR 3.2.4.2

The MFLPD is required to be calculated and compared to FRTM or APRM gain or Neutron Flux-High (Flow Biased) Function Allowable Value to ensure that the reactor is operating within the assumptions of the safety analysis. These SRs are only required to determine the MFLPD and, assuming MFLPD is greater than FRTM, the appropriate gain or Neutron Flux-High (Flow Biased) Function Allowable Value, and is not intended to be a CHANNEL FUNCTIONAL TEST for the APRM gain or Neutron Flux-High (Flow Biased) Function

(continued)

BASES

SURVEILLANCE
REQUIREMENTS

SR 3.2.4.1 and SR 3.2.4.2 (continued)

circuitry. SR 3.2.4.1 and SR 3.2.4.2 have been modified by Notes which clarify that the respective SR does not have to be met if the alternate requirement demonstrated by the other SR is satisfied. The 24 hour Frequency of SR 3.2.4.1 is chosen to coincide with the determination of other thermal limits, specifically those for the APLHGR (LCO 3.2.1) and LHGR (LCO 3.2.3). The 24 hour Frequency is based on the recognition of the slowness of changes in power distribution during normal operation. The 12 hour allowance after THERMAL POWER \geq 25% RTP is achieved is acceptable given the large inherent margin to operating limits at low power levels.

The 12 hour Frequency of SR 3.2.4.2 requires a more frequent verification than if MFLPD is less than or equal to FRTP. When MFLPD is greater than FRTP, more rapid changes in power distribution are typically expected.

REFERENCES

1. UFSAR, Section 16.6.
 2. UFSAR, Section 14.5.
 3. NEDE-24011-PA-13, General Electric Standard Application for Reactor Fuel, August 1996.
 4. NEDO-31960-A, BWR Owners' Group Long Term Stability Solutions Licensing Methodology, June 1991.
 5. NEDO-31960-A, Supplement 1, BWR Owners' Group Long-Term Stability Solutions Licensing Methodology, March 1992.
 6. GENE-637-044-0295, Application Of The "Regional Exclusion With Flow-Biased APRM Neutron Flux Scram" Stability Solution (Option I-D) To The James A. FitzPatrick Nuclear Power Plant, February 1995.
 7. 10 CFR 50.36(c)(2)(ii).
-

B 3.3 INSTRUMENTATION

B 3.3.1.1 Reactor Protection System (RPS) Instrumentation

BASES

BACKGROUND

The RPS initiates a reactor scram when one or more monitored parameters exceed their specified limits, to preserve the integrity of the fuel cladding and the reactor coolant pressure boundary (RCPB) and minimize the energy that must be absorbed following a loss of coolant accident (LOCA). This can be accomplished either automatically or manually.

The protection and monitoring functions of the RPS have been designed to ensure safe operation of the reactor. This is achieved by specifying limiting safety system settings (LSSS) in terms of parameters directly monitored by the RPS, as well as LCOs on other reactor system parameters and equipment performance.

Technical Specifications are required by 10 CFR 50.36 to contain LSSS defined by the regulation as "...settings for automatic protective devices...so chosen that automatic protective action will correct the abnormal situation before a Safety Limit (SL) is exceeded." The Analytic Limit is the limit of the process variable at which a safety action is initiated, as established by the safety analysis, to ensure that a SL is not exceeded. Any automatic protection action that occurs on reaching the Analytic Limit therefore ensures that the SL is not exceeded. However, in practice, the actual settings for automatic protective devices must be chosen to be more conservative than the Analytic Limit to account for instrument loop uncertainties related to the setting at which the automatic protective action would actually occur.

The Trip Setpoint is a predetermined setting on a protective device chosen to ensure automatic actuation prior to the process variable reaching the Analytic Limit and thus ensuring the SL would not be exceeded. As such, the Trip Setpoint accounts for uncertainties in setting the device (e.g., calibration), uncertainties in how the device might actually perform (e.g., repeatability), changes in the point of action of the device over time (e.g., drift during surveillance intervals), and any other factors which may influence its actual performance (e.g., harsh accident

TSTF-350

(continued)

BASES

BACKGROUND
(continued)

environments). In this manner, the Trip Setpoint plays an important role in ensuring that SLs are not exceeded. As such, the Trip Setpoint meets the definition of an LSSS and could be used to meet the requirement that they be contained in the Technical Specifications.

Technical Specifications contain values related to the OPERABILITY of equipment required for the safe operation of the facility. Operable is defined in Technical Specifications as "...being capable of performing its safety function(s)." For automatic protective devices, the required safety function is to ensure that a SL is not exceeded and therefore the LSSS as defined by 10 CFR 50.36 is the same as the OPERABILITY limit for those devices. However, use of the Trip Setpoint to define OPERABILITY in Technical Specifications and its corresponding designation as the LSSS required by 10 CFR 50.36 would be an overly restrictive requirement if it were applied as an OPERABILITY limit for the "as found" value of a protective device setting during a surveillance. This would result in Technical Specification compliance problems, as well as reports and corrective actions required by the rule which are not necessary to ensure safety. For example, an automatic protective device with a setting that has been found to be different from the Trip Setpoint due to some drift of the setting may still be OPERABLE since drift is to be expected. This expected drift would have been specifically accounted for in the setpoint methodology for calculating the Trip Setpoint and thus the automatic protective action would still have ensured that the SL would not be exceeded with the "as found" setting of the protective device. Therefore, the device would still be OPERABLE since it would have performed its safety function and the only corrective action required would be to reset the device to the Trip Setpoint to account for further drift during the next surveillance interval.

Use of the Trip Setpoint to define "as found" OPERABILITY and its designation as the LSSS under the expected circumstances described above would result in actions required by both the rule and Technical Specifications that are clearly not warranted. However, there is also some point beyond which the device would have not been able to perform its function due, for example, to greater than expected drift. This value needs to be specified in the

(continued)

BASES

BACKGROUND
(continued)

Technical Specifications in order to define OPERABILITY of the devices and is designated as the Allowable Value which, as stated above, is the same as the LSSS.

The Allowable Values specified in Table 3.3.1.1-1 serve as the LSSS such that a channel is OPERABLE if the trip setpoint is found not to exceed the Allowable Value. As such, the Allowable Value differs from the Trip Setpoint by an amount primarily equal to the expected instrument loop uncertainties, such as drift, during the surveillance interval. In this manner, the actual setting of the device will still meet the LSSS definition and ensure that a Safety Limit is not exceeded at any given point of time as long as the device has not drifted beyond that expected during the surveillance interval. If the actual setting of the device is found to have exceeded the Allowable Value the device would be considered inoperable from a Technical Specification perspective. This requires corrective action including those actions required by 10 CFR 50.36 when automatic protective devices do not function as required. Note that, although the channel is "OPERABLE" under these circumstances, the trip setpoint should be left adjusted to a value within the established trip setpoint calibration tolerance band, in accordance with uncertainty assumptions stated in the referenced setpoint methodology (as-left criteria), and confirmed to be operating within the statistical allowance of the uncertainty terms assigned.

The RPS, as described in the UFSAR, Section 7.2 (Ref. 1), includes sensors, relays, logic circuits, bypass circuits, and switches that are necessary to cause initiation of a reactor scram. Functional diversity is provided by monitoring a wide range of dependent and independent parameters. The input parameters to the scram logic are from instrumentation that monitors reactor vessel water level, reactor vessel pressure, neutron flux, main steam line isolation valve position, turbine control valve (TCV) fast closure (EHC Oil Pressure-Low), turbine stop valve (TSV) position, drywell pressure, and scram discharge instrument volume (SDIV) water level, as well as reactor mode switch in shutdown position and manual scram signals. There are at least four redundant sensor input signals from each of these parameters (with the exception of the reactor mode switch in shutdown position and manual scram signals). Most channels include instrumentation that compares measured input signals with pre-established setpoints. When the

(continued)

52-03-90m

TSV-211

BASES

BACKGROUND
(continued)

setpoint is exceeded, the channel outputs an RPS trip signal to the trip logic.

The RPS is comprised of two independent trip systems (A and B) with three trip channels in each trip system (trip channels A1, A2, and A3, B1, B2, and B3) as described in Reference 1. Trip channels A1, A2, B1 and B2 contain automatic protective instrument logic. The above monitored parameters are represented by at least one input to each of these automatic trip channels. The outputs of the automatic trip channels in a trip system are combined in a one-out-of-two logic so that either channel can trip the associated trip system. The tripping of both trip systems will produce a reactor scram. This logic arrangement is referred to as a one-out-of-two taken twice logic. There are four RPS channel test switches, one associated with each of the four automatic trip channels. These test switches allow the operator to test the OPERABILITY of the individual trip channel automatic scram contactors. In addition, trip channels A3 and B3 (one trip channel per trip system) are provided for manual scram. Placing the reactor mode switch in shutdown position or depressing both channel push buttons (one per trip system) will initiate the manual trip function. Each trip system is reset by use of a reset switch. If a full scram occurs (both trip systems trip), a relay prevents reset of the trip systems for approximately 10 seconds after the full scram signal is received. This 10 second delay on reset ensures that the scram function will be completed.

Two scram pilot valves are located in the hydraulic control unit for each control rod drive (CRD). Each scram pilot valve is solenoid operated, with the solenoids normally energized. The scram pilot valves control the air supply to the scram inlet and outlet valves for the associated CRD. When either scram pilot valve solenoid is energized, air pressure holds the scram valves closed and, therefore, both scram pilot valve solenoids must be de-energized to cause a control rod to scram. The scram valves control the supply and discharge paths for the CRD water during a scram. One of the scram pilot valve solenoids for each CRD is controlled by trip system A, and the other solenoid is controlled by trip system B. Any trip of trip system A in conjunction with any trip in trip system B results in de-energizing both solenoids, air bleeding off, scram valves opening, and control rod scram.

(continued)

BASES

BACKGROUND
(continued)

The backup scram valves, which energize on a scram signal to depressurize the scram air header, are also controlled by the RPS. Additionally, the RPS System controls the SDV vent and drain valves such that when both trip systems trip, the SDV vent and drain valves close to isolate the SDV.

APPLICABLE
SAFETY ANALYSES,
LCO, and
APPLICABILITY

The actions of the RPS are assumed in the safety analyses of References 1, 2, and 3. The RPS is required to initiate a reactor scram when monitored parameter values exceed the Allowable Values, specified by the setpoint methodology and listed in Table 3.3.1.1-1 to preserve the integrity of the fuel cladding, the RCPB, and the containment by minimizing the energy that must be absorbed following a LOCA.

RPS instrumentation satisfies Criterion 3 of 10 CFR 50.36(c)(2)(ii) (Ref. 4). Functions not specifically credited in the accident analysis are retained for the overall redundancy and diversity of the RPS as required by the NRC approved licensing basis.

The OPERABILITY of the RPS is dependent on the OPERABILITY of the individual instrumentation channel Functions specified in Table 3.3.1.1-1. Each Function must have a required number of OPERABLE channels per RPS trip system, with their setpoints within the specified Allowable Value, where appropriate. The actual setpoint is calibrated consistent with applicable setpoint methodology assumptions. Each channel must also respond within its assumed response time, where appropriate.

Allowable Values are specified, as appropriate for RPS Functions specified in the Table. Nominal trip setpoints are specified in the setpoint calculations. The nominal setpoints are selected to ensure that the actual setpoints do not exceed the Allowable Value between successive CHANNEL CALIBRATIONS. Operation with a trip setpoint less conservative than the nominal trip setpoint, but within its Allowable Value, is acceptable. A channel is inoperable if its actual trip setpoint is not within its required Allowable Value.

Trip setpoints are those predetermined values of output at which an action should take place. The setpoints are compared to the actual process parameter (e.g., reactor

(continued)

BASES

APPLICABLE
SAFETY ANALYSES
LCO, and
APPLICABILITY
(continued)

vessel water level), and when the measured output value of the process parameter exceeds the setpoint, the associated device (e.g., trip unit) changes state. The analytic limits are derived from the limiting values of the process parameters obtained from the safety analysis or other appropriate documents. The trip setpoints are derived from the analytical limits and account for all worst case instrumentation uncertainties as appropriate (e.g., drift, process effects, calibration uncertainties, and severe environmental errors (for channels that must function in harsh environments as defined by 10 CFR 50.49)). The trip setpoints derived in this manner provide adequate protection because all expected uncertainties are accounted for. The Allowable Values are then derived from the trip setpoints by accounting for normal effects that would be seen during periodic surveillance or calibration. These effects are instrumentation uncertainties observed during normal operation (e.g., drift and calibration uncertainties).

The OPERABILITY of scram pilot valves and associated solenoids, backup scram valves, and SDV valves, described in the Background section, are not addressed by this LCO.

The individual Functions are required to be OPERABLE in the MODES or other conditions specified in the table, which may require an RPS trip to mitigate the consequences of a design basis accident or transient. To ensure a reliable scram function, a combination of Functions are required in each MODE to provide primary and diverse initiation signals.

The only MODES specified in Table 3.3.1.1-1 are MODES 1 and 2 and MODE 5 with any control rod withdrawn from a core cell containing one or more fuel assemblies. No RPS Function is required in MODES 3 and 4, since all control rods are fully inserted and the Reactor Mode Switch Shutdown Position control rod withdrawal block (LCO 3.3.2.1) does not allow any control rod to be withdrawn. In MODE 5, control rods withdrawn from a core cell containing no fuel assemblies do not affect the reactivity of the core and, therefore, are not required to have the capability to scram. Provided all other control rods remain inserted, no RPS function is required. In this condition, the required SDM (LCO 3.1.1) and refuel position one-rod-out interlock (LCO 3.9.2) ensure that no event requiring RPS will occur.

(continued)

RAT 2.7 (1.1.1)

BASES

APPLICABLE
SAFETY ANALYSES,
LCO, and
APPLICABILITY
(continued)

The specific Applicable Safety Analyses, LCO, and Applicability discussions are listed below on a Function by Function basis.

Intermediate Range Monitor (IRM)

1.a. Intermediate Range Monitor Neutron Flux-High

The IRMs monitor neutron flux levels from the upper range of the source range monitor (SRM) to the lower range of the average power range monitors (APRMs). The IRMs are capable of generating trip signals that can be used to prevent fuel damage resulting from abnormal operating transients in the intermediate power range. In this power range, the most significant source of reactivity change is due to control rod withdrawal. The IRM provides diverse protection for the rod worth minimizer (RWM), which monitors and controls the movement of control rods at low power. The RWM prevents the withdrawal of an out of sequence control rod during startup that could result in an unacceptable neutron flux excursion (Ref. 2). The IRM provides mitigation of the neutron flux excursion. To demonstrate the capability of the IRM System to mitigate control rod withdrawal events, a generic analysis has been performed (Ref. 3) to evaluate the consequences of control rod withdrawal events during startup that are mitigated only by the IRM. This analysis, which assumes that one IRM channel in each trip system is bypassed, demonstrates that the IRMs provide protection against local control rod withdrawal errors and result in peak fuel enthalpy below the 170 cal/gm fuel failure threshold criterion.

The IRMs are also capable of limiting other reactivity excursions during startup, such as cold water injection events, although no credit is specifically assumed.

The IRM System is divided into two groups of IRM channels, with four IRM channels inputting to each trip system. The analysis of Reference 3 assumes that one channel in each trip system is bypassed. Therefore, six channels with three channels in each trip system are required for IRM OPERABILITY to ensure that no single instrument failure will preclude a scram from this Function on a valid signal. This trip is active in each of the 10 ranges of the IRM, which must be selected by the operator to maintain the neutron flux within the monitored level of an IRM range.

(continued)

BASES

APPLICABLE
SAFETY ANALYSES,
LCO, and
APPLICABILITY
(continued)

The analysis of Reference 3 has adequate conservatism to permit the IRM Allowable Value of 120 divisions of a 125 division scale.

The Intermediate Range Monitor Neutron Flux-High Function must be OPERABLE during MODE 2 when control rods may be withdrawn and the potential for criticality exists. In MODE 5, when a cell with fuel has its control rod withdrawn, the IRMs provide monitoring for and protection against unexpected reactivity excursions. In MODE 1, the APRM System, the RWM, and Rod Block Monitor provide protection against control rod withdrawal error events and the IRMs are not required. The IRMs are automatically bypassed when the reactor mode selector switch is in the run position.

1.b. Intermediate Range Monitor-Inop

This trip signal provides assurance that a minimum number of IRMs are OPERABLE. If an IRM Operate-Calibrate switch is moved to any position other than "Operate," the detector voltage drops below a preset level, or a module is not plugged in, an inoperative trip signal will be received by the RPS unless the IRM is bypassed. Since only one IRM in each trip system may be bypassed, only one IRM in each RPS trip system may be inoperable without resulting in an RPS trip signal.

This Function was not specifically credited in the accident analysis but it is retained for the overall redundancy and diversity of the RPS as required by the NRC approved licensing basis.

Six channels of Intermediate Range Monitor-Inop, with three channels in each trip system, are required to be OPERABLE to ensure that no single instrument failure will preclude a scram from this Function on a valid signal.

Since this Function is not assumed in the safety analysis, there is no Allowable Value for this Function.

This Function is required to be OPERABLE when the Intermediate Range Monitor Neutron Flux-High Function is required.

(continued)

BASES

APPLICABLE
SAFETY ANALYSES,
LCO, and
APPLICABILITY
(continued)

Average Power Range Monitor

2.a. Average Power Range Monitor Neutron Flux-High
(Startup)

The APRM channels receive input signals from the local power range monitors (LPRMs) within the reactor core that provide an indication of the power distribution and local power changes. The APRM channels average these LPRM signals to provide a continuous indication of average reactor power from a few percent to greater than RTP. For operation at low power (i.e., MODE 2), the Average Power Range Monitor Neutron Flux-High (Startup) Function is capable of generating a trip signal that prevents fuel damage resulting from abnormal operating transients in this power range. For most operation at low power levels, the Average Power Range Monitor Neutron Flux-High (Startup) Function will provide a secondary scram to the Intermediate Range Monitor Neutron Flux-High Function because of the relative setpoints. With the IRMs at Range 9 or 10, it is possible that the Average Power Range Monitor Neutron Flux-High (Startup) Function will provide the primary trip signal for a core-wide increase in power.

No specific safety analyses take direct credit for the Average Power Range Monitor Neutron Flux-High (Startup) Function. However, this Function indirectly ensures that before the reactor mode switch is placed in the run position, reactor power does not exceed 25% RTP (SL 2.1.1.1) when operating at low reactor pressure and low core flow. Therefore, it indirectly prevents fuel damage during significant reactivity increases with THERMAL POWER < 25% RTP.

The APRM System is divided into two groups of channels with three APRM channels providing input to each trip system. The system is designed to allow one channel in each trip system to be bypassed. Any one APRM channel in a trip system can cause the associated trip system to trip. Four channels of Average Power Range Monitor Neutron Flux-High (Startup) with two channels in each trip system are required to be OPERABLE to ensure that no single failure will preclude a scram from this Function on a valid signal. In addition, to provide adequate coverage of the entire core, at least 11 LPRM inputs are required for each APRM channel, with at least two LPRM inputs from each of the four axial

(continued)

BASES

APPLICABLE
SAFETY ANALYSES,
LCO, and
APPLICABILITY

2.a. Average Power Range Monitor Neutron Flux-High
(Startup) (continued)

Levels at which the LPRMs are located.

The Allowable Value is based on preventing significant increases in power when THERMAL POWER is < 25% RTP.

The Average Power Range Monitor Neutron Flux-High (Startup) Function must be OPERABLE during MODE 2 when control rods may be withdrawn since the potential for criticality exists.

In MODE 1, the Average Power Range Monitor Neutron Flux-High (Fixed) Function provides protection against reactivity transients and the RWM and rod block monitor protect against control rod withdrawal error events. The APRM Neutron Flux-High (Startup) Function is bypassed when the reactor mode switch is in the run position.

2.b. Average Power Range Monitor Neutron Flux-High
(Flow Biased)

The Average Power Range Monitor Neutron Flux-High (Flow Biased) Function monitors neutron flux. The APRM neutron flux trip level is varied as a function of recirculation drive flow but is clamped at an upper limit that is lower than the Average Power Range Monitor Neutron Flux-High (Fixed) Function, Function 2.c, Allowable Value. The Average Power Range Monitor Neutron Flux-High (Flow Biased) Function is not specifically credited in the safety analysis, but is intended to provide protection against transients where THERMAL POWER increases slowly (such as the loss of feedwater heating event), however, no credit is taken for this Function in the safety analyses except in the case of the thermal-hydraulic instability analysis. This protection is primarily achieved by the clamped portion of the Allowable Value. The APRM Neutron Flux - High (Flow Biased) Function will suppress power oscillations prior to exceeding the fuel safety limit (MCPR) caused by thermal hydraulic instability. As described in References 5 and 6, this protection is provided at a high statistical confidence level for core-wide mode oscillations and at a nominal statistical confidence level for regional mode oscillations. References 5 and 6 also demonstrate that the core-wide mode

(continued)

BASES

APPLICABLE
SAFETY ANALYSES
LCO, and
APPLICABILITY2.b. Average Power Range Monitor Neutron Flux-High
(Flow Biased) (continued)

of oscillation is more likely to occur due to the large single-phase channel pressure drop associated with the small fuel inlet orifice diameters. This protection for power oscillations is achieved by that portion of the Allowable Value which varies as a function of the recirculation drive flow.

The APRM System is divided into two groups of channels with three APRM channels providing input to each trip system. The system is designed to allow one channel in each trip system to be bypassed. Any one APRM channel in a trip system can cause the associated trip system to trip. Four channels of Average Power Range Monitor Neutron Flux-High (Flow Biased) with two channels in each trip system arranged in a one-out-of-two logic are required to be OPERABLE to ensure that no single failure will preclude a scram from this Function on a valid signal. In addition, to provide adequate coverage of the entire core, at least 11 LPRM inputs are required for each APRM channel, with at least two LPRM inputs from each of the four axial levels at which the LPRMs are located. Each APRM channel receives two independent, redundant flow signals representative of total recirculation loop flow. The recirculation loop flow signals are generated by four flow units, two of which supply signals to the trip system A APRMs, while the other two supply signals to the trip system B APRMs. Each flow unit signal is provided by summing up the flow signals from the two recirculation loops. To obtain the most conservative reference signals, the total flow signals from the two flow units (associated with a trip system as described above) are routed to a low auction circuit associated with each APRM. Each APRM's auction circuit selects the lower of the two flow unit signals for use as the scram trip reference for that particular APRM. Each required Average Power Range Monitor Neutron Flux-High (Flow Biased) channel requires an input from one OPERABLE flow unit, since the individual APRM channel will perform the intended function with only one OPERABLE flow unit input. However, in order to maintain single failure capability for the Function, at least one required Average Power Range Monitor Neutron Flux-High (Flow Biased) channel in each trip system must be capable of maintaining an OPERABLE flow unit signal in the event of a failure of an

(continued)

BASES

APPLICABLE
SAFETY ANALYSES,
LCO, and
APPLICABILITY

2.b. Average Power Range Monitor Neutron Flux-High
(Flow Biased) (continued)

auction circuit, or a flow unit, in the associated trip system (e.g., if a flow unit is inoperable, one of the two required Average Power Range Monitor Neutron Flux-High (Flow Biased) channels in the associated trip system must be considered inoperable).

The flow biased Allowable Value is credited in the safety analyses (thermal-hydraulic instability) and is specifically confirmed for each operating cycle. For this reason the Allowable Value is included in the COLR for both single and two recirculation loop operation. The clamped portion of the Allowable Value is set more conservative than the APRM Neutron Flux High (Fixed) (Function 2.c).

The Average Power Range Monitor Neutron Flux-High (Flow Biased) Function is required to be OPERABLE in MODE 1 when there is the possibility of generating excessive THERMAL POWER and potentially exceeding the SL applicable to high pressure and core flow conditions (MCPR SL). During MODES 2 and 5, other IRM and APRM Functions provide protection for fuel cladding integrity.

2.c. Average Power Range Monitor Neutron Flux-High (Fixed)

The APRM channels provide the primary indication of neutron flux within the core and respond almost instantaneously to neutron flux increases. The Average Power Range Monitor Neutron Flux-High (Fixed) Function is capable of generating a trip signal to prevent fuel damage or excessive Reactor Coolant System (RCS) pressure. For the overpressurization protection analysis of Reference 7, the Average Power Range Monitor Neutron Flux-High (Fixed) Function is assumed to terminate the main steam isolation valve (MSIV) closure event and, along with the safety/relief valves (S/RVs), limits the peak reactor pressure vessel (RPV) pressure to less than the ASME Code limits. The control rod drop accident (CRDA) analysis (Ref. 8) takes credit for the Average Power Range Monitor Neutron Flux-High (Fixed) Function to terminate the CRDA.

The APRM System is divided into two groups of channels with three APRM channels providing input to each trip system.

(continued)

BASES

APPLICABLE
SAFETY ANALYSES,
LCO, and
APPLICABILITY

2.c. Average Power Range Monitor Neutron Flux-High (Fixed)
(continued)

The system is designed to allow one channel in each trip system to be bypassed. Any one APRM channel in a trip system can cause the associated trip system to trip. Four channels of Average Power Range Monitor Neutron Flux-High (Fixed) with two channels in each trip system arranged in a one-out-of-two logic are required to be OPERABLE to ensure that no single failure will preclude a scram from this Function on a valid signal. In addition, to provide adequate coverage of the entire core, at least 11 LPRM inputs are required for each APRM channel, with at least two LPRM inputs from each of the four axial levels at which the LPRMs are located.

The Allowable Value is based on the Analytical Limit assumed in the CRDA analyses.

The Average Power Range Monitor Neutron Flux-High (Fixed) Function is required to be OPERABLE in MODE 1 where the potential consequences of the analyzed transients could result in the SLs (e.g., MCPR and RCS pressure) being exceeded. Although the Average Power Range Monitor Neutron Flux-High (Fixed) Function is assumed in the CRDA analysis (Ref. 8), which is applicable in MODE 2, the Average Power Range Monitor Neutron Flux-High, (Startup) Function conservatively bounds the assumed trip and, together with the assumed IRM trips, provides adequate protection. Therefore, the Average Power Range Monitor Neutron Flux-High (Fixed) Function is not required in MODE 2.

2.d. Average Power Range Monitor-Inop

This signal provides assurance that a minimum number of APRMs are OPERABLE. Anytime an APRM Operate-Calibrate switch is moved to any position other than "Operate," an APRM module is unplugged, or the APRM has too few LPRM inputs (< 11), an inoperative trip signal will be received by the RPS, unless the APRM is bypassed. Since only one APRM in each trip system may be bypassed, only one APRM in each trip system may be inoperable without resulting in an RPS trip signal. This Function was not specifically credited in the accident analysis, but it is retained for the overall redundancy and diversity of the RPS as required by the NRC approved licensing basis.

(continued)

BASES

APPLICABLE
SAFETY ANALYSES,
LCO, and
APPLICABILITY

2.d. Average Power Range Monitor - Inop (continued)

Four channels of Average Power Range Monitor - Inop with two channels in each trip system are required to be OPERABLE to ensure that no single failure will preclude a scram from this Function on a valid signal.

There is no Allowable Value for this Function. This Function is required to be OPERABLE in the MODES where the APRM Functions are required.

3. Reactor Pressure - High

An increase in the RCS pressure during reactor operation compresses the steam voids and results in a positive reactivity insertion. This causes the neutron flux and THERMAL POWER transferred to the reactor coolant to increase, which could challenge the integrity of the fuel cladding and the RCPB. The Reactor Pressure-High Function is specifically credited in the safety analyses for the generator load reject and turbine trip events when initiated from low power levels (Refs. 9 and 10). At low power levels (e.g., below 29% RTP), the Turbine Stop Valve - Closure and Turbine Control Valve Fast Closure, EHC Oil Pressure - Low Functions are not required to be OPERABLE. For the overpressurization protection analysis of Reference 7, reactor scram (the analyses conservatively assume scram on the Average Power Range Monitor Neutron Flux-High (Fixed) signal, not the Reactor Pressure-High signal), along with the S/RVs, limits the peak Reactor Pressure Vessel (RPV) pressure to less than the ASME Section III Code limits.

High reactor pressure signals are initiated from four pressure transmitters that sense reactor pressure. The Reactor Pressure-High Allowable Value is chosen to provide a sufficient margin to the ASME Section III Code limits during pressurization events.

Four channels of Reactor Pressure-High Function, with two channels in each trip system arranged in a one-out-of-two logic, are required to be OPERABLE to ensure that no single instrument failure will preclude a scram from this Function on a valid signal. The Function is required to be OPERABLE

(continued)

BASES

APPLICABLE
SAFETY ANALYSES,
LCO, and
APPLICABILITY

3. Reactor Pressure-High (continued)

in MODES 1 and 2 when the RCS is pressurized and the potential for pressure increase exists.

4. Reactor Vessel Water Level-Low (Level 3)

Low RPV water level indicates the capability to cool the fuel may be threatened. Should RPV water level decrease too far, fuel damage could result. Therefore, a reactor scram is initiated at Level 3 to substantially reduce the heat generated in the fuel from fission. The Reactor Vessel Water Level-Low (Level 3) Function is one of the Functions assumed in the analysis of the recirculation line break (Ref. 11). The reactor scram reduces the amount of energy required to be absorbed and, along with the actions of the Emergency Core Cooling Systems (ECCS), ensures that the fuel peak cladding temperature remains below the limits of 10 CFR 50.46.

Reactor Vessel Water Level-Low (Level 3) signals are initiated from four level transmitters that sense the difference between the pressure due to a constant column of water (reference leg) and the pressure due to the actual water level (variable leg) in the vessel.

Four channels of Reactor Vessel Water Level-Low (Level 3) Function, with two channels in each trip system arranged in a one-out-of-two logic, are required to be OPERABLE to ensure that no single failure will preclude a scram from this Function on a valid signal.

The Reactor Vessel Water Level-Low (Level 3) Allowable Value is selected to ensure that during normal operation the separator skirts are not uncovered (this protects available recirculation pump net positive suction head (NPSH) from significant carryunder) and, for transients involving loss of all normal feedwater flow, initiation of the low pressure ECCS subsystems at Reactor Vessel Water-Low Low Low (Level 1) will not be required. The Allowable Value is the water level above a zero reference level which is 352.56 inches above the lowest point inside the RPV and is also at the top of a 144 inch fuel column (Ref. 12).

(continued)

BASES

APPLICABLE
SAFETY ANALYSES,
LCO, and
APPLICABILITY

4. Reactor Vessel Water Level-Low (Level 3) (continued)

The Function is required in MODES 1 and 2 where considerable energy exists in the RCS resulting in the limiting transients and accidents. ECCS initiations at Reactor Vessel Water Level-Low Low (Level 2) and Low Low Low (Level 1) provide sufficient protection for level transients in all other MODES.

5. Main Steam Isolation Valve-Closure

MSIV closure results in loss of the main turbine and the condenser as a heat sink for the nuclear steam supply system and indicates a need to shut down the reactor to reduce heat generation. Therefore, a reactor scram is initiated on a Main Steam Isolation Valve-Closure signal before the MSIVs are completely closed in anticipation of the complete loss of the normal heat sink and subsequent overpressurization transient. However, for the overpressurization protection analysis of Reference 7, the Average Power Range Monitor Neutron Flux-High (Fixed) Function, along with the S/RVs, limits the peak RPV pressure to less than the ASME Code limits. That is, the direct scram on position switches for MSIV closure events is not assumed in the overpressurization analysis. Additionally, MSIV closure is assumed in the transients analyzed in References 13 and 14 (i.e., failure of the pressure regulator and manual closure of MSIVs, respectively) and in the main steam line break accident analyzed in Reference 15.

The reactor scram reduces the amount of energy required to be absorbed and, along with the actions of the ECCS, ensures that the fuel peak cladding temperature remains below the limits of 10 CFR 50.46.

MSIV closure signals are initiated from position switches located on each of the eight MSIVs. Each MSIV has two position switches; one inputs to RPS trip system A while the other inputs to RPS trip system B. Thus, each RPS trip system receives an input from eight Main Steam Isolation Valve-Closure channels, each consisting of one position switch. The logic for the Main Steam Isolation Valve-Closure Function is arranged such that either the inboard or outboard valve on three or more of the main steam lines must close in order for a scram to occur. The design

(continued)

BASES

APPLICABLE
SAFETY ANALYSES,
LCO, and
APPLICABILITY

5. Main Steam Isolation Valve-Closure (continued)

permits closure of any two lines without a full scram being initiated.

The Main Steam Isolation Valve-Closure Allowable Value is specified to ensure that a scram occurs prior to a significant reduction in steam flow, thereby reducing the severity of the subsequent pressure transient.

Sixteen channels of the Main Steam Isolation Valve-Closure Function, with eight channels in each trip system, are required to be OPERABLE to ensure that no single failure will preclude the scram from this Function on a valid signal. This Function is only required in MODE 1 since, with the MSIVs open and the heat generation rate high, a pressurization transient can occur if the MSIVs close. In MODE 2, the heat generation rate is low enough so that the other diverse RPS functions provide sufficient protection.

6. Drywell Pressure-High

High pressure in the drywell could indicate a break in the RCPB. A reactor scram is initiated to minimize the possibility of fuel damage and to reduce the amount of energy being added to the coolant and the drywell. The Drywell Pressure-High Function is assumed to scram the reactor for LOCAs inside primary containment (Ref. 11). The reactor scram reduces the amount of energy required to be absorbed and along with the actions of the ECCS, ensures that the fuel peak cladding temperature remains below the limits of 10 CFR 50.46.

High drywell pressure signals are initiated from four pressure transmitters that sense drywell pressure. The Allowable Value was selected to be as low as possible and indicative of a LOCA inside primary containment.

Four channels of Drywell Pressure-High Function, with two channels in each trip system arranged in a one-out-of-two logic, are required to be OPERABLE to ensure that no single instrument failure will preclude a scram from this Function on a valid signal. The Function is required in MODES 1 and 2 where considerable energy exists in the RCS, resulting in the limiting transients and accidents.

(continued)

BASES

APPLICABLE
SAFETY ANALYSES,
LCO, and
APPLICABILITY
(continued)

7.a 7.b Scram Discharge Instrument Volume Water Level-High

The SDIVs, east and west, are independent with separate drain lines and isolation valves. Each SDIV accommodates approximately half of the water displaced by the motion of the CRD pistons during a reactor scram. Should either SDIV fill to a point where there is insufficient volume to accept the displaced water, control rod insertion would be hindered. Therefore, a reactor scram is initiated while the remaining free volumes are still sufficient to accommodate the water from a full core scram. The two types of Scram Discharge Instrument Volume Water Level-High Functions are an input to the RPS logic. No credit is taken for a scram initiated from these Functions for any of the design basis accidents or transients analyzed in the UFSAR. However, they are retained to ensure the RPS remains OPERABLE.

SDIV water level is measured by two diverse methods. The level in each of the two SDIVs is measured by two float type level switches and two differential pressure transmitters for a total of eight level signals. The outputs of these devices are arranged so that there are either two level switch signals or two differential pressure transmitter signals to each RPS trip channel. Each trip channel receives signals from instrumentation from both the east and west SDIVs and each RPS trip system receives signals from the two diverse methods. The level measurement instrumentation satisfies the recommendations of Reference 16.

The Allowable Value is chosen low enough to ensure that there is sufficient volume in each SDIV to accommodate the water directed to it from a full scram.

Four channels of each type of Scram Discharge Instrument Volume Water Level-High Function, with two channels of each type in each trip system, are required to be OPERABLE to ensure that no single failure will preclude a scram from these Functions on a valid signal. These Functions are required in MODES 1 and 2, and in MODE 5 with any control rod withdrawn from a core cell containing one or more fuel assemblies, since these are the MODES and other specified conditions when control rods are withdrawn. At all other times, this Function may be bypassed.

(continued)

BASES

APPLICABLE
SAFETY ANALYSES,
LCO, and
APPLICABILITY
(continued)

8. Turbine Stop Valve-Closure

Closure of the TSVs results in the loss of the heat sink and produces reactor pressure, neutron flux, and heat flux transients that must be limited. Therefore, a reactor scram is initiated at the start of TSV closure in anticipation of the transients that would result from the closure of these valves. The Turbine Stop Valve-Closure Function is the primary scram signal for the turbine trip (Ref. 10), feedwater controller failure-maximum demand (Ref. 17), and the loss of main condenser vacuum (Ref. 10) events. For these events, the reactor scram reduces the amount of energy required to be absorbed and ensures that the MCPR SL is not exceeded.

Turbine Stop Valve-Closure signals are initiated from position switches located on each of the four TSVs. One double pole (contact) position switch is associated with each stop valve. One of the two contacts provides input to RPS trip system A; the other, to RPS trip system B. Thus, each RPS trip system receives an input from four Turbine Stop Valve-Closure channels, each consisting of one position switch contact inputting to a relay. The relay contacts provide a parallel logic input to an RPS trip channel. The logic for the Turbine Stop Valve-Closure Function is such that three or more TSVs must be closed to produce a scram. This Function must be enabled at THERMAL POWER \geq 29% RTP as measured by turbine first stage pressure. This is accomplished automatically by pressure transmitters sensing turbine first stage pressure; therefore, to consider this Function OPERABLE, the turbine bypass valves must remain shut (except during required testing or upon actual demand) at THERMAL POWER \geq 29% RTP. In addition, other steam loads, such as second stage reheaters in operation, must be accounted for in establishing the setpoint for turbine first stage pressure. Otherwise, the setpoint would be non-conservative with respect to the 29% RTP RPS bypass.

The Turbine Stop Valve-Closure Allowable Value is selected to detect imminent TSV closure, thereby reducing the severity of the subsequent pressure transient.

Eight channels of Turbine Stop Valve-Closure Function, with four channels in each trip system, are required to be OPERABLE to ensure that no single failure will preclude

(continued)

BASES

APPLICABLE
SAFETY ANALYSES,
LCO, and
APPLICABILITY

8. Turbine Stop Valve-Closure (continued)

a scram from this Function even if one TSV should fail to close. This Function is required, consistent with analysis assumptions, whenever THERMAL POWER is $\geq 29\%$ RTP. This Function is not required when THERMAL POWER is $< 29\%$ RTP since the Reactor Pressure-High and the Average Power Range Monitor Neutron Flux-High (Fixed) Functions are adequate to maintain the necessary safety margins.

9. Turbine Control Valve Fast Closure, EHC Oil Pressure-Low

Fast closure of the TCVs results in the loss of the heat sink and produces reactor pressure, neutron flux, and heat flux transients that must be limited. Therefore, a reactor scram is initiated on TCV fast closure in anticipation of the transients that would result from the closure of these valves. The Turbine Control Valve Fast Closure, EHC Oil Pressure-Low Function is the primary scram signal for the generator load rejection event analyzed in Reference 9. For this event, the reactor scram reduces the amount of energy required to be absorbed and ensures that the MCPR SL is not exceeded.

Turbine Control Valve Fast Closure, EHC Oil Pressure-Low signals are initiated by low electrohydraulic control (EHC) fluid pressure in the emergency trip header, between the fast closure solenoid and the disc dump valve for each control valve. One pressure switch is associated with each control valve, and the signal from each switch is assigned to a separate RPS trip channel. This Function must be enabled at THERMAL POWER $\geq 29\%$ RTP as measured by turbine first stage pressure. This is accomplished automatically by pressure transmitters sensing turbine first stage pressure; therefore, to consider this Function OPERABLE, the turbine bypass valves must remain shut (except during required testing or upon actual demand) at THERMAL POWER $\geq 29\%$ RTP. In addition, other steam loads, such as second stage reheaters in operation, must be accounted for in establishing the setpoint for turbine first stage pressure. Otherwise, the setpoint would be non-conservative with respect to the 29% RTP RPS bypass.

The Turbine Control Valve Fast Closure, EHC Oil Pressure-Low Allowable Value is selected high enough to

(continued)

7576-221

BASES

APPLICABLE
SAFETY ANALYSES,
LCO, and
APPLICABILITY

9. Turbine Control Valve Fast Closure, EHC Oil
Pressure-Low (continued)

detect imminent TCV fast closure and low enough to avoid inadvertent scrams.

Four channels of Turbine Control Valve Fast Closure, EHC Oil Pressure-Low Function with two channels in each trip system arranged in a one-out-of-two logic are required to be OPERABLE to ensure that no single failure will preclude a scram from this Function on a valid signal. This Function is required, consistent with the analysis assumptions, whenever THERMAL POWER is $\geq 29\%$ RTP. This Function is not required when THERMAL POWER is $< 29\%$ RTP, since the Reactor Pressure-High and the Average Power Range Monitor Neutron Flux-High (Fixed) Functions are adequate to maintain the necessary safety margins.

10. Reactor Mode Switch-Shutdown Position

The Reactor Mode Switch-Shutdown Position Function provides signals, via the manual scram trip channels directly to the scram pilot valve solenoid power circuits. The manual scram trip channels are redundant to the automatic protective instrumentation channels and provide manual reactor trip capability. This Function was not specifically credited in the accident analysis, but it is retained for the overall redundancy and diversity of the RPS as required by the NRC approved licensing basis.

The reactor mode switch is a keylock four-position, four-bank switch. The reactor mode switch will scram the reactor if it is placed in the shutdown position. Scram signals from the reactor mode switch are input into each of the two RPS manual scram trip channels.

There is no Allowable Value for this Function, since the channels are mechanically actuated based solely on reactor mode switch position.

Two channels of Reactor Mode Switch-Shutdown Position Function, with one channel in each trip system, are available and required to be OPERABLE. The Reactor Mode Switch-Shutdown Position Function is required to be OPERABLE in MODES 1 and 2, and MODE 5 with any control rod withdrawn from a core cell containing one or more fuel

(continued)

BASES

APPLICABLE
SAFETY ANALYSES,
LCO, and
APPLICABILITY

10. Reactor Mode Switch - Shutdown Position (continued)

assemblies, since these are the MODES and other specified conditions when control rods are withdrawn.

11. Manual Scram

The Manual Scram push button channels provide signals, via the manual scram trip channels, directly to the scram pilot valve solenoid power circuits. These manual scram trip channels are redundant to the automatic protective instrumentation channels and provide manual reactor trip capability. This Function was not specifically credited in the accident analysis but it is retained for the overall redundancy and diversity of the RPS as required by the NRC approved licensing basis.

There is one Manual Scram push button channel for each of the two RPS manual scram trip channels. In order to cause a scram it is necessary that the channel in both manual scram trip systems be actuated.

There is no Allowable Value for this Function since the channels are mechanically actuated based solely on the position of the push buttons.

Two channels of Manual Scram, with one channel in each manual scram trip system, are available and required to be OPERABLE in MODES 1 and 2, and in MODE 5 with any control rod withdrawn from a core cell containing one or more fuel assemblies, since these are the MODES and other specified conditions when control rods are withdrawn.

ACTIONS

A Note has been provided to modify the ACTIONS related to RPS instrumentation channels. Section 1.3, Completion Times, specifies that once a Condition has been entered, subsequent divisions, subsystems, components, or variables expressed in the Condition, discovered to be inoperable or not within limits, will not result in separate entry into the Condition unless specifically stated. Section 1.3 also specifies that the Required Actions of the Condition continue to apply for each additional failure, with Completion Times based on initial entry into the Condition.

(continued)

BASES

ACTIONS
(continued)

However, the Required Actions for inoperable RPS instrumentation channels provide appropriate compensatory measures for separate inoperable channels. As such, a Note has been provided that allows separate Condition entry for each inoperable RPS instrumentation channel.

A.1 and A.2

Because of the diversity of sensors available to provide trip signals and the redundancy of the RPS design, an allowable out of service time of 12 hours has been shown to be acceptable (Ref. 18) to permit restoration of any inoperable channel to OPERABLE status. However, this out of service time is only acceptable provided the associated Function's inoperable channel is in one trip system and the Function still maintains RPS trip capability (refer to Required Actions B.1, B.2, and C.1 Bases). If the inoperable channel cannot be restored to OPERABLE status within the allowable out of service time, the channel or the associated trip system must be placed in the tripped condition per Required Actions A.1 and A.2. Placing the inoperable channel in trip (or the associated trip system in trip) would conservatively compensate for the inoperability, restore capability to accommodate a single failure, and allow operation to continue. Alternatively, if it is not desired to place the channel (or trip system) in trip (e.g., as in the case where placing the inoperable channel in trip would result in a full scram), Condition D must be entered and its Required Action taken.

B.1 and B.2

Condition B exists when, for any one or more Functions, at least one required channel is inoperable in each trip system. In this condition, provided at least one channel per trip system is OPERABLE, the RPS still maintains trip capability for that Function, but cannot accommodate a single failure in either trip system.

Required Actions B.1 and B.2 limit the time the RPS scram logic, for any Function, would not accommodate single failure in both trip systems (e.g., one-out-of-one and one-out-of-one arrangement for a typical four channel Function). The reduced reliability of this logic

(continued)

BASES

ACTIONS

B.1 and B.2 (continued)

arrangement was not evaluated in Reference 18 for the 12 hour Completion Time. Within the 6 hour allowance, the associated Function will have all required channels OPERABLE or in trip (or any combination) in one trip system.

Completing one of these Required Actions restores RPS to a reliability level equivalent to that evaluated in Reference 18, which justified a 12 hour allowable out of service time as presented in Condition A. The trip system in the more degraded state should be placed in trip or, alternatively, all the inoperable channels in that trip system should be placed in trip (e.g., a trip system with two inoperable channels could be in a more degraded state than a trip system with four inoperable channels if the two inoperable channels are in the same Function while the four inoperable channels are all in different Functions). The decision of which trip system is in the more degraded state should be based on prudent judgment and take into account current plant conditions (i.e., what MODE the plant is in). If this action would result in a scram, it is permissible to place the other trip system or its inoperable channels in trip.

The 6 hour Completion Time is judged acceptable based on the remaining capability to trip, the diversity of the sensors available to provide the trip signals, the low probability of extensive numbers of inoperabilities affecting all diverse Functions, and the low probability of an event requiring the initiation of a scram.

Alternately, if it is not desired to place the inoperable channels (or one trip system) in trip (e.g., as in the case where placing the inoperable channel or associated trip system in trip would result in a scram), Condition D must be entered and its Required Action taken.

C.1

Required Action C.1 is intended to ensure that appropriate actions are taken if multiple, inoperable, untripped channels within the same trip system for the same Function result in the Function not maintaining RPS trip capability. A Function is considered to be maintaining RPS trip capability when sufficient channels are OPERABLE or in trip

(continued)

BASES

ACTIONS

C.1 (continued)

(or the associated trip system is in trip), such that both trip systems will generate a trip signal from the given Function on a valid signal. For the typical Function with one-out-of-two taken twice logic and the IRM and APRM Functions, this would require both trip systems to have one channel OPERABLE or in trip (or the associated trip system in trip). For Function 5 (Main Steam Isolation Valve-Closure), this would require both trip systems to have each channel associated with the MSIVs in three main steam lines (not necessarily the same main steam lines for both trip systems) OPERABLE or in trip (or the associated trip system in trip). For Function 8 (Turbine Stop Valve-Closure), this would require both trip systems to have three channels, each OPERABLE or in trip (or the associated trip system in trip).

For Functions 10 (Reactor Mode Switch-Shutdown Position) and 11 (Manual Scram) this would require both trip systems to have one channel each OPERABLE or in trip (or the associated trip system in trip).

The Completion Time is intended to allow the operator time to evaluate and repair any discovered inoperabilities. The 1 hour Completion Time is acceptable because it minimizes risk while allowing time for restoration or tripping of channels.

D.1

Required Action D.1 directs entry into the appropriate Condition referenced in Table 3.3.1.1-1. The applicable Condition specified in the Table is Function and MODE or other specified condition dependent and may change as the Required Action of a previous Condition is completed. Each time an inoperable channel has not met any Required Action of Condition A, B, or C and the associated Completion Time has expired, Condition D will be entered for that channel and provides for transfer to the appropriate subsequent Condition.

(continued)

BASES

ACTIONS
(continued)

E.1, F.1, and G.1

If the channel(s) is not restored to OPERABLE status or placed in trip (or the associated trip system placed in trip) within the allowed Completion Time, the plant must be placed in a MODE or other specified condition in which the LCO does not apply. The allowed Completion Times are reasonable, based on operating experience, to reach the specified condition from full power conditions in an orderly manner and without challenging plant systems. In addition, the Completion Time of Required Action E.1 is consistent with the Completion Time provided in LCO 3.2.2, "MINIMUM CRITICAL POWER RATIO (MCPR)."

H.1

If the channel(s) is not restored to OPERABLE status or placed in trip (or the associated trip system placed in trip) within the allowed Completion Time, the plant must be placed in a MODE or other specified condition in which the LCO does not apply. This is done by immediately initiating action to fully insert all insertable control rods in core cells containing one or more fuel assemblies. Control rods in core cells containing no fuel assemblies do not affect the reactivity of the core and are, therefore, not required to be inserted. Action must continue until all insertable control rods in core cells containing one or more fuel assemblies are fully inserted.

SURVEILLANCE
REQUIREMENTS

As noted at the beginning of the SRs, the SRs for each RPS instrumentation Function are located in the SRs column of Table 3.3.1.1-1.

The Surveillances are modified by a second Note to indicate that when a channel is placed in an inoperable status solely for performance of required Surveillances, entry into associated Conditions and Required Actions may be delayed for up to 6 hours, provided the associated Function maintains RPS trip capability. Upon completion of the Surveillance, or expiration of the 6 hour allowance, the channel must be returned to OPERABLE status or the applicable Condition entered and Required Actions taken. This Note is based on the reliability analysis (Ref. 18) assumption of the average time required to perform channel

(continued)

BASES

SURVEILLANCE
REQUIREMENTS
(continued)

Surveillances. That analysis demonstrated that the 6 hour testing allowance does not significantly reduce the probability that the RPS will trip when necessary.

SR 3.3.1.1.1

Performance of the CHANNEL CHECK once every 12 hours ensures that a gross failure of instrumentation has not occurred. A CHANNEL CHECK is normally a comparison of the parameter indicated on one channel to a similar parameter on other channels. It is based on the assumption that instrument channels monitoring the same parameter should read approximately the same value. Significant deviations between instrument channels could be an indication of excessive instrument drift in one of the channels or something even more serious. A CHANNEL CHECK will detect gross channel failure; thus, it is key to verifying the instrumentation continues to operate properly between each CHANNEL CALIBRATION. For Functions 8 and 9, this SR is associated with the enabling circuit sensing first stage pressure.

Channel agreement criteria are determined by the plant staff based on a combination of the channel instrument uncertainties, including indication and readability. If a channel is outside the criteria, it may be an indication that the instrument has drifted outside its limit.

The Frequency is based upon operating experience that demonstrates channel failure is rare. The CHANNEL CHECK supplements less formal, but more frequent, checks of channels during normal operational use of the displays associated with the channels required by the LCO.

SR 3.3.1.1.2

To ensure that the APRMs are accurately indicating the true core average power, the APRMs are calibrated to the reactor power calculated from a heat balance. LCO 3.2.4, "Average Power Range Monitor (APRM) Gain and Setpoints," allows the APRMs to be reading greater than actual THERMAL POWER to compensate for localized power peaking. When this adjustment is made, the requirement for the APRMs to indicate within 2% RTP of calculated power is modified to require the APRMs to indicate within 2% RTP of calculated

(continued)

BASES

SURVEILLANCE
REQUIREMENTS

SR 3.3.1.1.2 (continued)

MFLPD. The Frequency of once per 7 days is based on minor changes in LPRM sensitivity, which could affect the APRM reading between performances of SR 3.3.1.1.8.

A restriction to satisfying this SR when $< 25\%$ RTP is provided that requires the SR to be met only at $\geq 25\%$ RTP because it is difficult to accurately maintain APRM indication of core THERMAL POWER consistent with a heat balance when $< 25\%$ RTP. At low power levels, a high degree of accuracy is unnecessary because of the large, inherent margin to thermal limits (MCPR and APLHGR). At $\geq 25\%$ RTP, the Surveillance is required to have been satisfactorily performed within the last 7 days, in accordance with SR 3.0.2. A Note is provided which allows an increase in THERMAL POWER above 25% if the 7 day Frequency is not met per SR 3.0.2. In this event, the SR must be performed within 12 hours after reaching or exceeding 25% RTP. Twelve hours is based on operating experience and in consideration of providing a reasonable time in which to complete the SR.

SR 3.3.1.1.3

A CHANNEL FUNCTIONAL TEST is performed on each required channel to ensure that the entire channel will perform the intended function. A successful test of the required contacts(s) of a channel relay may be performed by the verification of the change of state of a single contact of the relay. This clarifies what is an acceptable CHANNEL FUNCTIONAL TEST of a relay. This is acceptable because all of the other required contacts of the relay are verified by other Technical Specifications and non-Technical Specifications tests at least once per refueling interval with the applicable extensions. Any setpoint adjustment shall be consistent with the assumptions of the current plant specific setpoint methodology.

As noted, SR 3.3.1.1.3 is not required to be performed when entering MODE 2 from MODE 1, since testing of the MODE 2 required IRM and APRM Functions cannot be performed in MODE 1 without utilizing jumpers, lifted leads, or movable links. This allows entry into MODE 2 if the 7 day Frequency is not met per SR 3.0.2. In this event, the SR must be performed within 12 hours after entering MODE 2 from MODE 1. Twelve hours is based on operating experience and in

(continued)

TSF-205

BASES

SURVEILLANCE
REQUIREMENTS

SR 3.3.1.1.3 (continued)

consideration of providing a reasonable time in which to complete the SR.

A Frequency of 7 days provides an acceptable level of system average unavailability over the Frequency interval and is based on reliability analysis (Ref. 18).

SR 3.3.1.1.4

A functional test of each automatic scram contactor is performed to ensure that each automatic trip channel will perform the intended function. There are four RPS channel test switches, one associated with each of the four automatic trip channels (A1, A2, B1, and B2). These test switches allow the operator to test the OPERABILITY of the individual trip channel automatic scram contactors as an alternative to using an automatic scram function trip. This is accomplished by placing the RPS channel test switch in the test position, which will input a trip signal into the associated RPS trip channel. The RPS channel test switches are not specifically credited in the accident analysis. The Manual Scram Functions at JAFNPP are not configured the same as the generic model used in Reference 18. However, Reference 18 concluded that the Surveillance Frequency extensions for RPS Functions were not affected by the difference in configuration since each automatic RPS trip channel has a test switch which is functionally the same as the manual scram switches in the generic model. As such, a functional test of each RPS automatic scram contactor using either its associated test switch or by test of any of the associated automatic RPS Functions is required to be performed once every 7 days. A successful test of the required contact(s) of a channel relay may be performed by the verification of the change of state of a single contact of the relay. This clarifies what is an acceptable CHANNEL FUNCTIONAL TEST of a relay. This is acceptable because all of the other required contacts of the relay are verified by other Technical Specifications and non-Technical Specifications tests at least once per refueling interval with applicable extensions. In accordance with Reference 18, the scram contactors must be tested as part of the Manual Scram Function. The Frequency of 7 days is based on the reliability analysis of Reference 18. (This automatic scram contactor testing is credited in the analysis to extend many automatic Scram Function Surveillance Frequencies).

TEST-LOS

(continued)

BASES

SURVEILLANCE
REQUIREMENTS
(continued)

SR 3.3.1.1.5 and SR 3.3.1.1.6

These Surveillances are established to ensure that no gaps in neutron flux indication exist from subcritical to power operation for monitoring core reactivity status.

The overlap between SRMs and IRMs is required to be demonstrated to ensure that reactor power will not be increased into a neutron flux region without adequate indication. This is required prior to withdrawing SRMs from the fully inserted position since indication is being transitioned from the SRMs to the IRMs.

The overlap between IRMs and APRMs is of concern when reducing power into the IRM range. On power increases, the system design will prevent further increases (by initiating a rod block) if adequate overlap is not maintained. Overlap between IRMs and APRMs exists when sufficient IRMs and APRMs concurrently have onscale readings such that the transition between MODE 1 and MODE 2 can be made without either APRM downscale rod block, or IRM upscale rod block. Overlap between SRMs and IRMs similarly exists when, prior to withdrawing the SRMs from the fully inserted position, IRMs are above mid-scale on range 1 before SRMs have reached the upscale rod block.

As noted, SR 3.3.1.1.6 is only required to be met during entry into MODE 2 from MODE 1. That is, after the overlap requirement has been met and indication has transitioned to the IRMs, maintaining overlap is not required (APRMs may be reading downscale once in MODE 2).

If overlap for a group of channels is not demonstrated (e.g., IRM/APRM overlap), the reason for the failure of the Surveillance should be determined and the appropriate channel(s) declared inoperable. Only those appropriate channels that are required in the current MODE or condition should be declared inoperable.

A Frequency of 7 days is reasonable based on engineering judgment and the reliability of the IRMs and APRMs.

SR 3.3.1.1.7

LPRM gain settings are determined from the local flux profiles measured by the Traversing Incore Probe (TIP)

(continued)

BASES

SURVEILLANCE
REQUIREMENTS

SR 3.3.1.1.7 (continued)

System. This establishes the relative local flux profile for appropriate representative input to the APRM System. The 1000 MWD/T Frequency is based on operating experience with LPRM sensitivity changes.

SR 3.3.1.1.8 and SR 3.3.1.1.12

A CHANNEL FUNCTIONAL TEST is performed on each required channel to ensure that the channel will perform the intended function. A successful test of the required contact(s) of a channel relay may be performed by the verification of the change of state of a single contact of the relay. This clarifies what is an acceptable CHANNEL FUNCTIONAL TEST of a relay. This is acceptable because all of the other required contacts of the relay are verified by other Technical Specifications and non-Technical Specifications tests at least once per refueling interval with the applicable extensions. Any setpoint adjustment shall be consistent with the assumptions of the current plant specific setpoint methodology. For Function 2.b, the CHANNEL FUNCTIONAL TEST includes the adjustment of the APRM channel to conform to the calibrated flow signal. This ensures that the total loop drive flow signals from the flow units used to vary the setpoint is appropriately compared to a valid core flow signal to verify the flow signal trip setpoint and, therefore, the APRM Function accurately reflects the required setpoint as a function of flow. If the flow unit signal is not within the appropriate flow limit, one required APRM that receives an input from the inoperable flow unit must be declared inoperable. For Function 7.b, the CHANNEL FUNCTIONAL Test must be performed utilizing a water column or similar device to provide assurance that damage to a float or other portions of the float assembly will be detected.

The 92 day Frequency of SR 3.3.1.1.8 is based on the reliability analysis of Reference 18.

The 24 month Frequency of SR 3.3.1.1.12 is based on the need to perform this Surveillance under the conditions that apply during a plant outage and the potential for an unplanned transient if the Surveillance were performed with the

(continued)

BASES

SURVEILLANCE
REQUIREMENTS

SR 3.3.1.1.8 and SR 3.3.1.1.12 (continued)

reactor at power. Operating experience has shown that these components usually pass the Surveillance when performed at the 24 month Frequency.

SR 3.3.1.1.9, SR 3.3.1.1.11, and SR 3.3.1.1.13

A CHANNEL CALIBRATION is a complete check of the instrument loop and the sensor. This test verifies that the channel responds to the measured parameter within the necessary range and accuracy. CHANNEL CALIBRATION leaves the channel adjusted to account for instrument drifts between successive calibrations consistent with the plant specific setpoint methodology. Physical inspection of the position switches is performed inconjunction with SR 3.3.1.1.13 for Functions 5 and 8 to ensure that the switches are not corroded or otherwise degraded. For Function 7.b, the CHANNEL CALIBRATION must be performed utilizing a water column or similar device to provide assurance that damage to a float or other portions of the float assembly will be detected. For Function 2.b, the recirculation loop flow signals are calibrated in accordance with SR 3.3.1.1.13 while thecalibration of all other components associated with this Function is performed in accordance with SR 3.3.1.1.11. For Functions 8 and 9, SR 3.3.1.1.13 is associated with the enabling circuit sensing first stage turbine pressure as well as the trip function.

SR 3.3.1.1.11 and SR 3.3.1.1.13 have been modified by two NOTES. Note 1 states that neutron detectors are excluded from CHANNEL CALIBRATION because they are passive devices, with minimal drift, and because of the difficulty of simulating a meaningful signal. Changes in neutron detector sensitivity are compensated for by performing the 7 day calorimetric calibration (SR 3.3.1.1.2) and the 1000 MWD/T LPRM calibration against the TIPS (SR 3.3.1.1.7). A second Note is provided that requires the APRM and IRM SRs to be performed within 12 hours of entering MODE 2 from MODE 1. Testing of the MODE 2 APRM and IRM Functions cannot be performed in MODE 1 without utilizing jumpers, lifted leads, or movable links. This Note allows entry into MODE 2 from MODE 1 if the associated Frequency is not met per SR 3.0.2. Twelve hours is based on operating experience and in

(continued)

BASES

SURVEILLANCE
REQUIREMENTS

SR 3.3.1.1.9, SR 3.3.1.1.11, and SR 3.3.1.1.13
(continued)

consideration of providing a reasonable time in which to complete the SR.

Reactor Pressure-High and Reactor Water Level-Low (Level 3) Function sensors (Functions 3 and 4, respectively) are excluded from the RPS RESPONSE TIME testing (Ref. 19). However, prior to the CHANNEL CALIBRATION of these sensors a response check must be performed to ensure adequate response. This testing is required by Reference 20. Personnel involved in this testing must have been trained in response to Reference 21 to ensure they are aware of the consequences of instrument response time degradation. This response check must be performed by placing a fast ramp or a step change into the input of each required sensor. The personnel, must monitor the input and output of the associated sensor so that simultaneous monitoring and verification may be accomplished.

The Frequency of SR 3.3.1.1.9 is based on the assumption of a 92 day calibration interval in the determination of the magnitude of equipment drift in the setpoint analysis. The Frequency of SR 3.3.1.1.11 is based upon the assumption of a 184 day calibration interval in the determination of the magnitude of equipment drift in the setpoint analysis. The Frequency of SR 3.3.1.1.13 is based upon the assumption of a 24 month calibration interval in the determination of the magnitude of equipment drift in the setpoint analysis.

SR 3.3.1.1.10

Calibration of trip units provides a check of the actual trip setpoints. The channel must be declared inoperable if the trip setting is discovered to be less conservative than the Allowable Value specified in Table 3.3.1.1-1. If the trip setting is discovered to be less conservative than accounted for in the appropriate setpoint methodology, but is not beyond the Allowable Value, the channel performance is still within the requirements of the plant safety analysis. Under these conditions, the setpoint must be readjusted to be equal to or more conservative than accounted for in the appropriate setpoint methodology. For Functions 8 and 9, this SR is associated with the enabling circuit sensory first stage turbine pressure.

(continued)

BASES

SURVEILLANCE
REQUIREMENTS

SR 3.3.1.1.10 (continued)

The Frequency of 184 days is based on the reliability, accuracy, and lower failure rates of the solid-state electronic Analog Transmitter/Trip System components.

SR 3.3.1.1.14

The LOGIC SYSTEM FUNCTIONAL TEST demonstrates the OPERABILITY of the required trip logic for a specific channel. The functional testing of control rods (LCO 3.1.3), and SDV vent and drain valves (LCO 3.1.8), overlaps this Surveillance to provide complete testing of the assumed safety function.

The 24 month Frequency is based on the need to perform this Surveillance under the conditions that apply during a plant outage and the potential for an unplanned transient if the Surveillance were performed with the reactor at power. Operating experience has shown that these components usually pass the Surveillance when performed at the 24 month Frequency.

SR 3.3.1.1.15

This SR ensures that scrams initiated from the Turbine Stop Valve-Closure and Turbine Control Valve Fast Closure, EHC Oil Pressure-Low Functions will not be inadvertently bypassed when THERMAL POWER is $\geq 29\%$ RTP. This involves calibration of the bypass channels. Adequate margins for the instrument setpoint methodologies are incorporated into the actual setpoint. Because main turbine bypass flow can affect this setpoint nonconservatively (THERMAL POWER is derived from turbine first stage pressure), the main turbine bypass valves must remain closed during an inservice calibration at THERMAL POWER $\geq 29\%$ RTP to ensure that the calibration is valid.

If any bypass channel's setpoint is nonconservative (i.e., the Functions are bypassed at $\geq 29\%$ RTP, either due to open main turbine bypass valve(s) or other reasons), then the affected Turbine Stop Valve-Closure and Turbine Control Valve Fast Closure, EHC Oil Pressure-Low Functions are considered inoperable. Alternatively, the bypass channel can be placed in the conservative condition (nonbypass). If

(continued)

BASES

SURVEILLANCE
REQUIREMENTS

SR 3.3.1.1.15 (continued)

placed in the nonbypass condition, this SR is met and the channel is considered OPERABLE.

The Frequency of 24 months is based on engineering judgment and reliability of the components.

SR 3.3.1.1.16

This SR ensures that the individual channel response times are less than or equal to the maximum values assumed in the accident analysis. The RPS RESPONSE TIME acceptance criteria are included in Reference 22.

RPS RESPONSE TIME may be verified by actual response time measurements in any series of sequential, overlapping, or total channel measurements. However, the sensors for Functions 3 and 4 are allowed to be excluded from specific RPS RESPONSE TIME measurement if the conditions of Reference 19 are satisfied. If these conditions are satisfied, sensor response time may be allocated based on either assumed design sensor response time or the manufacturer's stated design response time. When the requirements of Reference 19 are not satisfied, sensor response time must be measured.

Note 1 excludes neutron detectors from RPS RESPONSE TIME testing because the principles of detector operation virtually ensure an instantaneous response time.

RPS RESPONSE TIME tests are conducted on a 24 month STAGGERED TEST BASIS. Note 2 requires STAGGERED TEST BASIS Frequency to be determined based on 2 channels. This ensures all required channels are tested during two Surveillance Frequency intervals. For Functions 2.b, 2.c, 3, 4, 6, and 9, two channels must be tested during each test; while for Functions 5 and 8, eight and four channels must be tested. This Frequency is based on the logic interrelationships of the various channels required to produce an RPS scram signal. The 24 month Frequency is consistent with the typical industry refueling cycle and is based upon plant operating experience, which shows that random failures of instrumentation components causing serious response time degradation, but not channel failure, are infrequent occurrences.

(continued)

157F-322/0012

BASES

- REFERENCES
1. UFSAR, Section 7.2.
 2. UFSAR, Section 14.5.4.2.
 3. NEDO-23842, Continuous Control Rod Withdrawal Transient In The Startup Range, April 18, 1978.
 4. 10 CFR 50.36(c)(2)(ii).
 5. NEDO-31960-A, BWR Owners' Group Long Term Stability Solutions Licensing Methodology, June 1991.
 6. NEDO-31960-A, Supplement 1, BWR Owners' Group Long Term Stability Solutions Licensing Methodology, Supplement 1, March 1992.
 7. UFSAR, Section 14.5.1.2.
 8. UFSAR, Section 14.6.1.2.
 9. UFSAR, Section 14.5.2.1.
 10. UFSAR, Section 14.5.2.2.
 11. UFSAR, Section 6.3.
 12. Drawing 11825-5.01-15D, Rev. D, Reactor Assembly Nuclear Boiler, (GE Drawing 919D690BD).
 13. UFSAR, Section 14.5.5.1.
 14. UFSAR, Section 14.5.2.3.
 15. UFSAR, Section 14.6.1.5.
 16. P. Check (NRC) letter to G. Lainas (NRC), BWR Scram Discharge System Safety Evaluation, December 1, 1980.
 17. UFSAR, Section 14.5.9.
 18. NEDC-30851P-A, Technical Specification Improvement Analyses for BWR Reactor Protection System, March 1988.

(continued)

BASES

REFERENCES
(continued)

19. NEDO-32291-A System Analyses For the Elimination of Selected Response Time Testing Requirements, October 1995.
 20. NRC letter dated October 28, 1996, Issuance of Amendment 235 to Facility Operating License DPR-59 for James A. FitzPatrick Nuclear Power Plant.
 21. NRC Bulletin 90-01, Supplement 1, Loss of Fill-Oil in Transmitters Manufactured by Rosemount, December 1992.
 22. UFSAR, Table 7.2-5.
-
-

B 3.3 INSTRUMENTATION

B 3.3.1.2 Source Range Monitor (SRM) Instrumentation

BASES

BACKGROUND

The SRMs provide the operator with information relative to the neutron flux level at very low flux levels in the core. As such, the SRM indication is used by the operator to monitor the approach to criticality and determine when criticality is achieved. The SRMs are maintained fully inserted until the count rate is greater than a minimum allowed count rate (a control rod block is set at this condition). After SRM to intermediate range monitor (IRM) overlap is demonstrated (as required by SR 3.3.1.1.5), the SRMs are normally fully withdrawn from the core.

The SRM subsystem of the Neutron Monitoring System (NMS) consists of four channels. Each of the SRM channels can be bypassed, but only one at any given time, by the operation of a bypass switch. Each channel includes one detector that can be physically positioned in the core. Each detector assembly consists of a miniature fission chamber with associated cabling, signal conditioning equipment, and electronics associated with the various SRM functions. The signal conditioning equipment converts the current pulses from the fission chamber to analog DC currents that correspond to the count rate. Each channel also includes indication, alarm, and control rod blocks. However, this LCO specifies OPERABILITY requirements only for the monitoring and indication functions of the SRMs.

During refueling, shutdown, and low power operations, the primary indication of neutron flux levels is provided by the SRMs or special movable detectors connected to the normal SRM circuits. The SRMs provide monitoring of reactivity changes during fuel or control rod movement and give the control room operator early indication of unexpected subcritical multiplication that could be indicative of an approach to criticality.

APPLICABLE SAFETY ANALYSES

Prevention and mitigation of prompt reactivity excursions during refueling and low power operation is provided by LCO 3.9.1, "Refueling Equipment Interlocks"; LCO 3.1.1, "SHUTDOWN MARGIN (SDM)"; LCO 3.3.1.1, "Reactor Protection

(continued)

BASES

APPLICABLE
SAFETY ANALYSES
(continued)

System (RPS) Instrumentation"; IRM Neutron Flux-High and Average Power Range Monitor (APRM) Neutron Flux-High, (Startup) Functions; and LCO 3.3.2.1, "Control Rod Block Instrumentation."

The SRMs have no safety function and are not assumed to function during any UFSAR design basis accident or transient analysis. However, the SRMs provide the only on-scale monitoring of neutron flux levels during startup and refueling. Therefore, they are being retained in Technical Specifications.

LCO

During startup in MODE 2, three of the four SRM channels are required to be OPERABLE to monitor the reactor flux level prior to and during control rod withdrawal, subcritical multiplication and reactor criticality, and neutron flux level and reactor period until the flux level is sufficient to maintain the IRMs on Range 3 or above. All but one of the channels are required in order to provide a representation of the overall core response during those periods when reactivity changes are occurring throughout the core.

In MODES 3 and 4, with the reactor shut down, two SRM channels provide redundant monitoring of flux levels in the core.

In MODE 5, during a spiral offload or reload, an SRM outside the fueled region will no longer be required to be OPERABLE, since it is not capable of monitoring neutron flux in the fueled region of the core. Thus, CORE ALTERATIONS are allowed in a quadrant with no OPERABLE SRM in an adjacent quadrant provided the Table 3.3.1.2-1, footnote (b), requirement that the bundles being spiral reloaded or spiral offloaded are all in a single fueled region containing at least one OPERABLE SRM is met. Spiral reloading and offloading encompass reloading or offloading a cell on the edge of a continuous fueled region (the cell can be reloaded or offloaded in any sequence).

In nonspiral routine operations, two SRMs are required to be OPERABLE to provide redundant monitoring of reactivity

(continued)

BASES

LCO
(continued)

changes occurring in the reactor core. Because of the local nature of reactivity changes during refueling, adequate coverage is provided by requiring one SRM to be OPERABLE in the quadrant of the reactor core where CORE ALTERATIONS are being performed, and the other SRM to be OPERABLE in an adjacent quadrant containing fuel. These requirements ensure that the reactivity of the core will be continuously monitored during CORE ALTERATIONS.

Special movable detectors, according to footnote (c) of Table 3.3.1.2-1, may be used in place of the normal SRM nuclear detectors. These special detectors must be connected to the normal SRM circuits in the NMS, such that the applicable neutron flux indication can be generated. These special detectors provide more flexibility in monitoring reactivity changes during fuel loading, since they can be positioned anywhere within the core during refueling. They must still meet the location requirements of SR 3.3.1.2.2 and all other required SRs for SRMs.

For an SRM channel to be considered OPERABLE, it must be providing neutron flux monitoring indication.

APPLICABILITY

The SRMs are required to be OPERABLE in MODES 2, 3, 4, and 5 prior to the IRMs being on scale on Range 3 to provide for neutron monitoring. In MODE 1, the APRMs provide adequate monitoring of reactivity changes in the core; therefore, the SRMs are not required. In MODE 2, with IRMs on Range 3 or above, the IRMs provide adequate monitoring and the SRMs are not required.

ACTIONS

A.1 and B.1

In MODE 2, with the IRMs on Range 2 or below, SRMs provide the means of monitoring core reactivity and criticality. With any number of the required SRMs inoperable, the ability to monitor neutron flux is degraded. Therefore, a limited time is allowed to restore the inoperable channels to OPERABLE status.

(continued)

BASES

ACTIONS

A.1 and B.1 (continued)

Provided at least one SRM remains OPERABLE, Required Action A.1 allows 4 hours to restore the required SRMs to OPERABLE status. This time is reasonable because there is adequate capability remaining to monitor the core, there is limited risk of an event during this time, and there is sufficient time to take corrective actions to restore the required SRMs to OPERABLE status or to establish alternate IRM monitoring capability. During this time, control rod withdrawal and power increase is not precluded by this Required Action. Having the ability to monitor the core with at least one SRM, proceeding to IRM Range 3 or greater (with overlap required by SR 3.3.1.1.5), and thereby exiting the Applicability of this LCO, is acceptable for ensuring adequate core monitoring and allowing continued operation.

With three required SRMs inoperable, Required Action B.1 allows no positive changes in reactivity (control rod withdrawal must be immediately suspended) due to inability to monitor the changes. Required Action A.1 still applies and allows 4 hours to restore monitoring capability prior to requiring control rod insertion. This allowance is based on the limited risk of an event during this time, provided that no control rod withdrawals are allowed, and the desire to concentrate efforts on repair, rather than to immediately shut down, with no SRMs OPERABLE.

C.1

In MODE 2, if the required number of SRMs is not restored to OPERABLE status within the allowed Completion Time, the reactor shall be placed in MODE 3. With all control rods fully inserted, the core is in its least reactive state with the most margin to criticality. The allowed Completion Time of 12 hours is reasonable, based on operating experience, to reach MODE 3 in an orderly manner and without challenging plant systems.

(continued)

BASES

ACTIONS
(continued)

D.1 and D.2

With one or more required SRMs inoperable in MODE 3 or 4, the neutron flux monitoring capability is degraded or nonexistent. The requirement to fully insert all insertable control rods ensures that the reactor will be at its minimum reactivity level while no neutron monitoring capability is available. Placing the reactor mode switch in the shutdown position prevents subsequent control rod withdrawal by maintaining a control rod block. The allowed Completion Time of 1 hour is sufficient to accomplish the Required Action, and takes into account the low probability of an event requiring the SRM occurring during this interval.

E.1 and E.2

With one or more required SRMs inoperable in MODE 5, the ability to detect local reactivity changes in the core during refueling is degraded. CORE ALTERATIONS must be immediately suspended and action must be immediately initiated to fully insert all insertable control rods in core cells containing one or more fuel assemblies. Suspending CORE ALTERATIONS prevents the two most probable causes of reactivity changes, fuel loading and control rod withdrawal, from occurring. Inserting all insertable control rods ensures that the reactor will be at its minimum reactivity given that fuel is present in the core. Suspension of CORE ALTERATIONS shall not preclude completion of the movement of a component to a safe, conservative position.

Action (once required to be initiated) to insert control rods must continue until all insertable rods in core cells containing one or more fuel assemblies are inserted.

SURVEILLANCE
REQUIREMENTS

As noted at the beginning of the SRs, the SRs for each SRM Applicable MODE or other specified conditions are found in the SRs column of Table 3.3.1.2-1.

(continued)

BASES

SURVEILLANCE
REQUIREMENTS
(continued)

SR 3.3.1.2.1 and SR 3.3.1.2.3

Performance of the CHANNEL CHECK ensures that a gross failure of instrumentation has not occurred. A CHANNEL CHECK is normally a comparison of the parameter indicated on one channel to a similar parameter on another channel. It is based on the assumption that instrument channels monitoring the same parameter should read approximately the same value. Significant deviations between the instrument channels could be an indication of excessive instrument drift in one of the channels or something even more serious. A CHANNEL CHECK will detect gross channel failure; thus, it is key to verifying the instrumentation continues to operate properly between each CHANNEL CALIBRATION.

Channel agreement criteria are determined by the plant staff based on a combination of the channel instrument uncertainties, including indication and readability. If a channel is outside the criteria, it may be an indication that the instrument has drifted outside its limit.

The Frequency of once every 12 hours for SR 3.3.1.2.1 is based on operating experience that demonstrates channel failure is rare. While in MODES 3 and 4, reactivity changes are not expected; therefore, the 12 hour Frequency is relaxed to 24 hours for SR 3.3.1.2.3. The CHANNEL CHECK supplements less formal, but more frequent, checks of channels during normal operational use of the displays associated with the channels required by the LCO.

SR 3.3.1.2.2

To provide adequate coverage of potential reactivity changes in the core when the fueled region encompasses more than one SRM, one SRM is required to be OPERABLE in the quadrant where CORE ALTERATIONS are being performed, and the other OPERABLE SRM must be in an adjacent quadrant containing fuel. Note 1 states that the SR is required to be met only during CORE ALTERATIONS. It is not required to be met at other times in MODE 5 since core reactivity changes are not occurring. This Surveillance consists of a review of plant logs to ensure that SRMs required to be OPERABLE for given CORE ALTERATIONS are, in fact, OPERABLE. In the event that only one SRM is required to be OPERABLE (when the fueled region encompasses only one SRM), per Table 3.3.1.2-1,

(continued)

BASES

SURVEILLANCE
REQUIREMENTS

SR 3.3.1.2.2 (continued)

footnote (b), only the a. portion of this SR is required. Note 2 clarifies that more than one of the three requirements can be met by the same OPERABLE SRM. The 12 hour Frequency is based upon operating experience and supplements operational controls over refueling activities that include steps to ensure that the SRMs required by the LCO are in the proper quadrant.

SR 3.3.1.2.4

This Surveillance consists of a verification of the SRM instrument readout to ensure that the SRM reading is greater than a specified minimum count rate with the detector full-in, which ensures that the detectors are indicating count rates indicative of neutron flux levels within the core. With few fuel assemblies loaded, the SRMs will not have a high enough count rate to satisfy the SR. Therefore, allowances are made for loading sufficient "source" material, in the form of irradiated fuel assemblies, to establish the minimum count rate.

To accomplish this, the SR is modified by a Note that states that the count rate is not required to be met on an SRM that has less than or equal to four fuel assemblies adjacent to the SRM and no other fuel assemblies are in the associated core quadrant. With four or less fuel assemblies loaded around each SRM and no other fuel assemblies in the associated core quadrant, even with a control rod withdrawn, the configuration will not be critical.

The Frequency is based upon channel redundancy and other information available in the control room, and ensures that the required channels are frequently monitored while core reactivity changes are occurring. When no reactivity changes are in progress, the Frequency is relaxed from 12 hours to 24 hours.

(continued)

BASES

SURVEILLANCE
REQUIREMENTS

SR 3.3.1.2.5 and SR 3.3.1.2.6

Performance of a CHANNEL FUNCTIONAL TEST demonstrates the associated channel will function properly. A successful test of the required contact(s) of a channel relay may be performed by the verification of the change of state of a single contact of the relay. This clarifies what is an acceptable CHANNEL FUNCTIONAL TEST of a relay. This is acceptable because all of the other required contacts of the relay are verified by other Technical Specifications and non-Technical Specifications tests at least once per refueling interval with the applicable extensions.

SR 3.3.1.2.5 is required in MODE 5, and the 7 day Frequency ensures that the channels are OPERABLE while core reactivity changes could be in progress. This Frequency is reasonable, based on operating experience and on other Surveillances (such as a CHANNEL CHECK), that ensure proper functioning between CHANNEL FUNCTIONAL TESTS.

SR 3.3.1.2.6 is required in MODE 2 with IRMs on Range 2 or below, and in MODES 3 and 4. Since core reactivity changes do not normally take place in MODES 3 and 4, and core reactivity changes are due only to control rod movement in MODE 2, the Frequency has been extended from 7 days to 31 days. The 31 day Frequency is based on operating experience and on other Surveillances (such as CHANNEL CHECK) that ensure proper functioning between CHANNEL FUNCTIONAL TESTS.

Verification of the signal to noise ratio also ensures that the detectors are inserted to an acceptable operating level. In a fully withdrawn condition, the detectors are sufficiently removed from the fueled region of the core to essentially eliminate neutrons from reaching the detector. Any count rate obtained while the detectors are fully withdrawn is assumed to be "noise" only.

The Note to SR 3.3.1.2.6 allows the Surveillance to be delayed until entry into the specified condition of the Applicability (THERMAL POWER decreased to IRM Range 2 or below). The SR must be performed within 12 hours after IRMs are on Range 2 or below. The allowance to enter the Applicability with the 31 day Frequency not met is

(continued)

TS/F-20581

BASES

SURVEILLANCE
REQUIREMENTS
(continued)

SR 3.3.1.2.5 and SR 3.3.1.2.6

reasonable, based on the limited time of 12 hours allowed after entering the Applicability and the inability to perform the Surveillance while at higher power levels. Although the Surveillance could be performed while on IRM Range 3, the plant would not be expected to maintain steady state operation at this power level. In this event, the 12 hour Frequency is reasonable, based on the SRMs being otherwise verified to be OPERABLE (i.e., satisfactorily performing the CHANNEL CHECK) and the time required to perform the Surveillances.

SR 3.3.1.2.7

Performance of a CHANNEL CALIBRATION at a Frequency of 24 months verifies the performance of the SRM detectors and associated circuitry. The Frequency considers the plant conditions required to perform the test, the ease of performing the test, and the likelihood of a change in the system or component status. The neutron detectors are excluded from the CHANNEL CALIBRATION (Note 1) because they cannot readily be adjusted. The detectors are fission chambers that are designed to have a relatively constant sensitivity over the range and with an accuracy specified for a fixed useful life.

Note 2 to the Surveillance allows the Surveillance to be delayed until entry into the specified condition of the Applicability. The SR must be performed in MODE 2 within 12 hours of entering MODE 2 with IRMs on Range 2 or below. The allowance to enter the Applicability with the 24 month Frequency not met is reasonable, based on the limited time of 12 hours allowed after entering the Applicability and the inability to perform the Surveillance while at higher power levels. Although the Surveillance could be performed while on IRM Range 3, the plant would not be expected to maintain steady state operation at this power level. In this event, the 12 hour Frequency is reasonable, based on the SRMs being otherwise verified to be OPERABLE (i.e., satisfactorily performing the CHANNEL CHECK) and the time required to perform the Surveillances.

REFERENCES

None.

B 3.3 INSTRUMENTATION

B 3.3.2.1 Control Rod Block Instrumentation

BASES

BACKGROUND

Control rods provide the primary means for control of reactivity changes. Control rod block instrumentation includes channel sensors, logic circuits, bypass circuits, switches, and relays that are designed to ensure that specified fuel design limits are not exceeded for postulated transients and accidents. During high power operation, the rod block monitor (RBM) provides protection for control rod withdrawal error events. During low power operations, control rod blocks from the rod worth minimizer (RWM) enforce specific control rod sequences designed to mitigate the consequences of the control rod drop accident (CRDA). During shutdown conditions, control rod blocks from the Reactor Mode Switch-Shutdown Position Function ensure that all control rods remain inserted to prevent inadvertent criticalities.

The purpose of the RBM is to limit control rod withdrawal if localized neutron flux exceeds a predetermined setpoint during control rod manipulations. It is assumed to function to block further control rod withdrawal to preclude a MCPR Safety Limit (SL) violation. The RBM supplies a trip signal to the Reactor Manual Control System (RMCS) to appropriately inhibit control rod withdrawal during power operation above the low power range setpoint. The RBM has two channels, either of which can initiate a control rod block when the channel output exceeds the control rod block setpoint. One RBM channel inputs into one RMCS rod block circuit and the other RBM channel inputs into the second RMCS rod block circuit. The RBM channel signal is generated by averaging a set of local power range monitor (LPRM) signals. One RBM channel averages the signals of the LPRM detectors from the A and C level of the assigned LPRM assemblies, while the other RBM channel averages the signals of the LPRM detectors at the B and D level. Assignment of LPRM assemblies to be used in RBM averaging is controlled by the selection of control rods. If any LPRM detector assigned to an RBM is bypassed, the computed average signal is automatically adjusted to compensate for the number of LPRM input signals. The minimum number of LPRM inputs required for each RBM channel to prevent an instrument inoperative alarm is four when using four LPRM assemblies, three when using three

(continued)

BASES

BACKGROUND
(continued)

LPRM assemblies, and two when using two LPRM assemblies. Each RBM also receives a recirculation loop flow signal. The RBM is automatically bypassed and the output set to zero if a peripheral rod is selected or the APRM used to normalize the RBM reading is < 30% RTP (Ref. 1). In addition, one of the two RBM channels can be manually bypassed.

When a control rod is selected, the gain of each RBM channel output is normalized to the assigned APRM channel. The assigned APRM channel is on the same RPS trip system as the RBM channel. The gain setting is held constant during the movement of the selected control rod to provide an indication of the change in the relative local power level. If the indicated local power level increases above the preset limit, a rod block will occur. There are three parallel rod block setpoint lines which have an adjustable slope. These setpoint lines provide a setpoint that is a function of the recirculation loop flow signal. Intercepts of these setpoint lines with rated recirculation loop flow are adjustable. Lights in the control room indicate which rod block setpoint line is active. Two percent below the intermediate and lower rod block setpoint are the setup permissive and setdown lines. These lines, on increasing power, light a setup permissive indicator so that the operator can evaluate the conditions and manually change the setpoint to the next higher rod block setpoint line. On decreasing power these lines provide automatic setdown. In addition, to preclude rod movement with an inoperable RBM (if not bypassed), a downscale trip and an inoperable trip are provided. A rod block signal is generated if an RBM downscale trip or an inoperable trip occurs, since this could indicate a problem with the RBM channel. The downscale trip will occur if the RBM channel signal decreases below the downscale trip setpoint after the RBM channel signal has been normalized. The inoperable trip will occur during the nulling (normalization) sequence, if the RBM channel fails to null, too few LPRM inputs are available, a module is not plugged in, or the function switch is moved to any position other than "Operate".

The purpose of the RWM is to control rod patterns during startup and shutdown, such that only specified control rod sequences and relative positions are allowed over the operating range from all control rods inserted to 10% RTP.

(continued)

BASES

BACKGROUND
(continued)

The sequences effectively limit the potential amount and rate of reactivity increase during a CRDA. Prescribed control rod sequences are stored in the RWM, which will initiate control rod withdrawal and insert blocks when the actual sequence deviates beyond allowances from the stored sequence. The RWM determines the actual sequence based on position indication for each control rod. The RWM also uses steam flow signals compensated for steam pressure to determine when the reactor power is above the preset power level at which the RWM is automatically bypassed (Ref. 2). The RWM is a single channel system that provides input into both RMCS rod block circuits.

With the reactor mode switch in the shutdown position, a control rod withdrawal block is applied to all control rods to ensure that the shutdown condition is maintained. This Function prevents inadvertent criticality as the result of a control rod withdrawal during MODE 3 or 4, or during MODE 5 when the reactor mode switch is required to be in the shutdown position. The reactor mode switch has two channels, each inputting into a separate RMCS rod block circuit. A rod block in either RMCS circuit will provide a control rod block to all control rods.

APPLICABLE
SAFETY ANALYSES,
LCO, and
APPLICABILITY

1. Rod Block Monitor

The RBM is designed to prevent violation of the MCPR SL and the cladding 1% plastic strain fuel design limit that may result from a single control rod withdrawal error (RWE) event. The analytical methods and assumptions used in evaluating the RWE event are summarized in Reference 3. A statistical analysis of RWE events was performed to determine the RBM response for both channels for each event. From these responses, the fuel thermal performance as a function of RBM Allowable Value was determined. The Allowable Values are chosen as a function of power level and flow. Based on the specified Allowable Values, operating limits are established.

The RBM Function satisfies Criterion 3 of 10 CFR 50.36(c)(2)(ii) (Ref. 4).

(continued)

BASES

APPLICABLE
SAFETY ANALYSES,
LCO, and
APPLICABILITY

1. Rod Block Monitor (continued)

Two channels of the RBM are required to be OPERABLE, with their setpoints within the appropriate Allowable Value specified in the COLR, to ensure that no single failure can preclude a rod block from this Function. The actual setpoints are calibrated consistent with applicable setpoint methodology.

Nominal trip setpoints are specified in the setpoint calculations. The nominal setpoints are selected to ensure that the setpoints do not exceed the Allowable Values between successive CHANNEL CALIBRATIONS. Operation with a trip setpoint less conservative than the nominal trip setpoint, but within its Allowable Value, is acceptable. Trip setpoints are those predetermined values of output at which an action should take place. The setpoints are compared to the actual process parameter (e.g., reactor power), and when the measured output value of the process parameter exceeds the setpoint, the associated device (e.g., trip unit) changes state. The analytic limits are derived from the limiting values of the process parameters obtained from the safety analysis. The trip setpoints are derived from the analytical limits and account for all worst case instrumentation uncertainties as appropriate (e.g., drift, process effects, calibration uncertainties, and severe environmental errors (for channels that must function in harsh environments as defined by 10 CFR 50.49)). The trip setpoints derived in this manner provide adequate protection because all expected uncertainties are accounted for. The Allowable Values are then derived from the trip setpoints by accounting for normal effects that would be seen during periodic surveillance or calibration. These effects are instrumentation uncertainties observed during normal operation (e.g., drift and calibration uncertainties).

| A
| A
| A
| A

The RBM is assumed to mitigate the consequences of an RWE event when operating $\geq 30\%$ RTP and a peripheral control rod is not selected. Below this power level, or if a peripheral control rod is selected, the consequences of an RWE event will not exceed the MCPR SL and, therefore, the RBM is not required to be OPERABLE (Ref. 3).

(continued)

BASES

APPLICABLE
SAFETY ANALYSES,
LCO, and
APPLICABILITY
(continued)

2. Rod Worth Minimizer

The RWM enforces the banked position withdrawal sequence (BPWS) to ensure that the initial conditions of the CRDA analysis are not violated. The analytical methods and assumptions used in evaluating the CRDA are summarized in Reference 5. The BPWS requires that control rods be moved in groups, with all control rods assigned to a specific group required to be within specified banked positions. Requirements that the control rod sequence is in compliance with the BPWS are specified in LCO 3.1.6, "Rod Pattern Control."

The RWM Function satisfies Criterion 3 of 10 CFR 50.36(c)(2)(ii) (Ref. 4).

Since the RWM is a system designed to act as a backup to operator control of the rod sequences, only one channel of the RWM is available and required to be OPERABLE (Ref. 6). Special circumstances provided for in the Required Action of LCO 3.1.3, "Control Rod OPERABILITY," and LCO 3.1.6 may necessitate bypassing the RWM to allow continued operation with inoperable control rods, or to allow correction of a control rod pattern not in compliance with the BPWS. The RWM may be bypassed as required by these conditions, but then it must be considered inoperable and the Required Actions of this LCO followed.

Compliance with the BPWS, and therefore OPERABILITY of the RWM, is required in MODES 1 and 2 when THERMAL POWER is $\leq 10\%$ RTP. When THERMAL POWER is $> 10\%$ RTP, there is no possible control rod configuration that results in a control rod worth that could exceed the 280 cal/gm fuel damage limit during a CRDA (Refs. 6 and 7). In MODES 3 and 4, all control rods are required to be inserted into the core; therefore, a CRDA cannot occur. In MODE 5, since only a single control rod can be withdrawn from a core cell containing fuel assemblies, adequate SDM ensures that the consequences of a CRDA are acceptable, since the reactor will be subcritical.

3. Reactor Mode Switch-Shutdown Position

During MODES 3 and 4, and during MODE 5 when the reactor mode switch is in the shutdown position, the core is assumed

(continued)

BASES

APPLICABLE
SAFETY ANALYSES,
LCO, and
APPLICABILITY

3. Reactor Mode Switch-Shutdown Position (continued)

to be subcritical; therefore, no positive reactivity insertion events are analyzed. The Reactor Mode Switch-Shutdown Position control rod withdrawal block ensures that the reactor remains subcritical by blocking control rod withdrawal, thereby preserving the assumptions of the safety analysis.

The Reactor Mode Switch-Shutdown Position Function satisfies Criterion 3 of 10 CFR 50.36(c)(2)(ii) (Ref. 4).

Two channels are required to be OPERABLE to ensure that no single failure will preclude a rod block when required. There is no Allowable Value for this Function since the channels are mechanically actuated based solely on reactor mode switch position.

During shutdown conditions (MODE 3, 4, or 5), no positive reactivity insertion events are analyzed because assumptions are that control rod withdrawal blocks are provided to prevent criticality. Therefore, when the reactor mode switch is in the shutdown position, the control rod withdrawal block is required to be OPERABLE. During MODE 5 with the reactor mode switch in the refueling position, the refuel position one-rod-out interlock (LCO 3.9.2 "Refuel Position One Rod-Out Interlock") provides the required control rod withdrawal blocks.

ACTIONS

A.1

With one RBM channel inoperable, the remaining OPERABLE channel is adequate to perform the control rod block function; however, overall reliability is reduced because a single failure in the remaining OPERABLE channel can result in no control rod block capability for the RBM. For this reason, Required Action A.1 requires restoration of the inoperable channel to OPERABLE status. The Completion Time of 24 hours is based on the low probability of an event occurring coincident with a failure in the remaining OPERABLE channel.

(continued)

BASES

ACTIONS
(continued)

B.1

If Required Action A.1 is not met and the associated Completion Time has expired, the inoperable channel must be placed in trip within 1 hour. If both RBM channels are inoperable, the RBM is not capable of performing its intended function; thus, one channel must also be placed in trip. This initiates a control rod withdrawal block, thereby ensuring that the RBM function is met.

The 1 hour Completion Time is intended to allow the operator time to evaluate and repair any discovered inoperabilities and is acceptable because it minimizes risk while allowing time for restoration or tripping of inoperable channels.

C.1, C.2.1.1, C.2.1.2, and C.2.2

With the RWM inoperable during a reactor startup, the operator is still capable of enforcing the prescribed control rod sequence. However, the overall reliability is reduced because a single operator error can result in violating the control rod sequence. Therefore, control rod movement must be immediately suspended except by scram. Alternatively, startup may continue if at least 12 control rods have already been withdrawn, or a reactor startup with an inoperable RWM during withdrawal of one or more of the first 12 rods was not performed in the last calendar year. These requirements minimize the number of reactor startups initiated with RWM inoperable. Required Actions C.2.1.1 and C.2.1.2 require verification of these conditions by review of plant logs and control room indications. Once Required Action C.2.1.1 or C.2.1.2 is satisfactorily completed, control rod withdrawal may proceed in accordance with the restrictions imposed by Required Action C.2.2. Required Action C.2.2 allows for the RWM Function to be performed manually and requires a double check of compliance with the prescribed rod sequence by a second licensed operator (Reactor Operator or Senior Reactor Operator) or reactor engineer.

The RWM may be bypassed under these conditions to allow continued operations. In addition, Required Actions of LCO 3.1.3 and LCO 3.1.6 may require bypassing the RWM, during which time the RWM must be considered inoperable with Condition C entered and its Required Actions taken.

(continued)

RAI -
3.3.2.1-4

BASES

ACTIONS

D.1

With the RWM inoperable during a reactor shutdown, the operator is still capable of enforcing the prescribed control rod sequence. Required Action D.1 allows for the RWM Function to be performed manually and requires a double check of compliance with the prescribed rod sequence by a second licensed operator (Reactor Operator or Senior Reactor Operator) or reactor engineer. The RWM may be bypassed under these conditions to allow the reactor shutdown to continue.

E.1 and E.2

With one Reactor Mode Switch-Shutdown Position control rod withdrawal block channel inoperable, the remaining OPERABLE channel is adequate to perform the control rod withdrawal block function. However, since the Required Actions are consistent with the normal action of an OPERABLE Reactor Mode Switch-Shutdown Position Function (i.e., maintaining all control rods inserted), there is no distinction between having one or two channels inoperable.

In both cases (one or both channels inoperable), suspending all control rod withdrawal and initiating action to fully insert all insertable control rods in core cells containing one or more fuel assemblies will ensure that the core is subcritical with adequate SDM, (LCO 3.1.1, SHUTDOWN MARGIN (SDM)). Control rods in core cells containing no fuel assemblies do not affect the reactivity of the core and are therefore not required to be inserted. Action must continue until all insertable control rods in core cells containing one or more fuel assemblies are fully inserted.

(continued)

BASES (continued)

SURVEILLANCE
REQUIREMENTS

As noted (Note 1) at the beginning of the SRs, the SRs for each Control Rod Block instrumentation Function are found in the SRs column of Table 3.3.2.1-1.

The Surveillances are modified by Note 2 to indicate that when an RBM channel is placed in an inoperable status solely for performance of required Surveillances, entry into associated Conditions and Required Actions may be delayed for up to 6 hours provided the associated Function maintains control rod block capability. Upon completion of the Surveillance, or expiration of the 6 hour allowance, the channel must be returned to OPERABLE status or the applicable Condition entered and Required Actions taken. This Note is based on the reliability analysis (Ref. 8) assumption of the average time required to perform channel Surveillance. That analysis demonstrated that the 6 hour testing allowance does not significantly reduce the probability that a control rod block will be initiated when necessary.

SR 3.3.2.1.1

A CHANNEL FUNCTIONAL TEST is performed for each RBM channel to ensure that the entire channel will perform the intended function. It includes the Reactor Manual Control Multiplexing System input. A successful test of the required contacts(s) of a channel relay may be performed by the verification of the change of state of a single contact of the relay. This clarifies what is an acceptable CHANNEL FUNCTIONAL TEST of a relay. This is acceptable because all of the other required contacts of the relay are verified by other Technical Specifications and non-Technical Specifications tests at least once per refueling interval with the applicable extensions. Testing of the Reactor Manual Control Multiplexing System input shall include inputs of "no control rod selected," "peripheral control rod selected," and other control rods selected with two, three, or four LPRM assemblies around it. In addition, testing shall include a verification that an inoperable trip occurs when a module is not plugged in, or the function switch is moved to any position other than "Operate". The Frequency of 92 days is based on reliability analyses (Ref. 9).

SR 3.3.2.1.2 and SR 3.3.2.1.3

A CHANNEL FUNCTIONAL TEST is performed for the RWM to ensure that the entire system will perform the intended function. A successful test of the required contacts(s) of a channel relay may be performed by the verification of the change of

(continued)

7074-205 R3

7074-205 R3

BASES

SURVEILLANCE
REQUIREMENTS

SR 3.3.2.1.2 and SR 3.3.2.1.3 (continued)

state of a single contact of the relay. This clarifies what is an acceptable CHANNEL FUNCTIONAL TEST of a relay. This is acceptable because all of the other required contacts of the relay are verified by other Technical Specifications and non-Technical Specifications tests at least once per refueling interval with the applicable extensions. The CHANNEL FUNCTIONAL TEST for the RWM is performed by attempting to withdraw a control rod not in compliance with the prescribed sequence and verifying a control rod block occurs. As noted in the SRs, SR 3.3.2.1.2 is not required to be performed until 1 hour after any control rod is withdrawn at $\leq 10\%$ RTP in MODE 2 and, SR 3.3.2.1.3 is not required to be performed until 1 hour after THERMAL POWER is $\leq 10\%$ RTP in MODE 1. This allows entry into MODE 2 for SR 3.3.2.1.2, and entry into MODE 1 when THERMAL POWER is $\leq 10\%$ RTP for SR 3.3.2.1.3, to perform the required Surveillance if the 92 day Frequency is not met per SR 3.0.2. The 1 hour allowance is based on operating experience and in consideration of providing a reasonable time in which to complete the SRs. The 92 day Frequencies are based on reliability analysis (Ref. 9).

SR 3.3.2.1.4

The RBM is automatically bypassed when power is below a specified value or if a peripheral control rod is selected. The power level is determined from the APRM signals input to each RBM channel. The automatic bypass must be verified periodically to be $< 30\%$ RTP. In addition, it must also be verified that the RBM is not bypassed when a non-peripheral control rod is selected (only one non-peripheral control rod is required to be verified). If any bypass setpoint is nonconservative, then the affected RBM channel is considered inoperable. Alternatively, the APRM channel can be placed in the conservative condition (i.e., enabling the nonbypass). If placed in this condition, the SR is met and the RBM channel is not considered inoperable. As noted, neutron detectors are excluded from the Surveillance because they are passive devices, with minimal drift, and because of the difficulty of simulating a meaningful signal. Neutron detectors are adequately tested in SR 3.3.1.1.2 and SR 3.3.1.1.7. The 92 day Frequency is based on the actual trip setpoint methodology utilized for these channels.

SR 3.3.2.1.5

A CHANNEL CALIBRATION is a complete check of the instrument loop and the sensor. This test verifies the channel responds to the measured parameter within the necessary

(continued)

TSTF-205R3

BASES

SURVEILLANCE
REQUIREMENTS

SR 3.3.2.1.5 (continued)

range and accuracy. CHANNEL CALIBRATION leaves the channel adjusted to account for instrument drifts between successive calibrations consistent with the plant specific setpoint methodology.

As noted, neutron detectors are excluded from the CHANNEL CALIBRATION because they are passive devices, with minimal drift, and because of the difficulty of simulating a meaningful signal. Neutron detectors are adequately tested in SR 3.3.1.1.2 and SR 3.3.1.1.7.

The Frequency is based upon the assumption of a 92 day calibration interval in the determination of the magnitude of equipment drift in the setpoint analysis.

SR 3.3.2.1.6

The RWM is automatically bypassed when power is above a specified value. The power level is determined from steam flow signals compensated for steam pressure. The automatic bypass setpoint must be verified periodically to be $\leq 10\%$ RTP. If the RWM low power setpoint is nonconservative, then the RWM is considered inoperable. Alternately, the low power setpoint channel can be placed in the conservative condition (nonbypass). If placed in the nonbypassed condition, the SR is met and the RWM is not considered inoperable. The Frequency is based on the trip setpoint methodology utilized for the low power setpoint channel.

SR 3.3.2.1.7

A CHANNEL FUNCTIONAL TEST is performed for the Reactor Mode Switch-Shutdown Position Function to ensure that the entire channel will perform the intended function. A successful test of the required contact(s) of a channel relay may be performed by the verification of the change of state of a single contact of the relay. This clarifies what is an acceptable CHANNEL FUNCTIONAL TEST of a relay. This is acceptable because all of the other required contacts of the relay are verified by other Technical Specifications and non-Technical Specifications tests at least once per refueling interval with the applicable extensions. The CHANNEL FUNCTIONAL TEST for the Reactor Mode Switch-Shutdown Position Function is performed by attempting to withdraw any control rod with the reactor mode switch in the shutdown position and verifying a control rod block occurs.

(continued)

BASES

SURVEILLANCE
REQUIREMENTS

SR 3.3.2.1.7 (continued)

As noted in the SR, the Surveillance is not required to be performed until 1 hour after the reactor mode switch is in the shutdown position, since testing of this interlock with the reactor mode switch in any other position cannot be performed without using jumpers, lifted leads, or movable links. This allows entry into MODES 3 and 4 if the 24 month Frequency is not met per SR 3.0.2. The 1 hour allowance is based on operating experience and in consideration of providing a reasonable time in which to complete the SRs.

The 24 month Frequency is based on the need to perform this Surveillance under the conditions that apply during a plant outage and the potential for an unplanned transient if the Surveillance were performed with the reactor at power. Operating experience has shown these components usually pass the Surveillance when performed at the 24 month Frequency.

SR 3.3.2.1.8

The RWM will only enforce the proper control rod sequence if the rod sequence is properly input into the RWM computer. This SR ensures that the proper sequence is loaded into the RWM so that it can perform its intended function. The Surveillance is performed once prior to declaring RWM OPERABLE following loading of sequence into RWM, since this is when rod sequence input errors are possible.

REFERENCES

1. UFSAR, Section 7.5.8.2.
2. UFSAR, Section 7.16.5.3.
3. NEDE-24011-P-A-13-US, General Electric Standard Application for Reactor Fuel, Supplement for United States, Section S.2.2.1.5, August 1996.
4. 10 CFR 50.36(c)(2)(ii).
5. UFSAR, Section 14.6.1.2.
6. NRC SER, Acceptance of Referencing of Licensing Topical Report NEDE-24011-P-A, General Electric Standard Application for Reactor Fuel, Revision 8, Amendment 17, December 27, 1987.
7. Modifications to the Requirements for Control Rod Drop Accident Mitigating Systems, BWR Owners' Group, July 1986.

(continued)

BASES

REFERENCES
(continued)

8. GENE-770-06-1-A, Addendum To - Bases For Changes To Surveillance Test Intervals And Allowed Out-of-Service Times For Selected Instrumentation Technical Specifications, December 1992.
 9. NEDC-30851P-A, Supplement 1, Technical Specification Improvement Analysis for BWR Control Rod Block Instrumentation, May 1988.
-
-

1A

B 3.3 INSTRUMENTATION

B 3.3.2.2 Feedwater and Main Turbine High Water Level Trip Instrumentation

BASES

BACKGROUND

The feedwater and main turbine high water level trip instrumentation is designed to detect a potential failure of the Feedwater Level Control System that causes excessive feedwater flow.

With excessive feedwater flow, the water level in the reactor vessel rises toward the high water level, Level 8 reference point, causing the trip of the two feedwater pump turbines and the main turbine.

Reactor Vessel Water Level-High (Level 8) signals are provided by level sensors that sense the difference between the pressure due to a constant column of water (reference leg) and the pressure due to the actual water level in the reactor vessel (variable leg). Three channels of Reactor Vessel Water Level-High (Level 8) instrumentation are provided as input to three trip systems. Each system is arranged with a two-out-of-three initiation logic. Each trip system trips one feedwater pump turbine or the main turbine. The channels include electronic equipment (e.g., alarm units) that compares measured input signals with pre-established setpoints. When the setpoint is exceeded, the channel output relay actuates, which then outputs a feedwater and main turbine trip signal to the trip logic.

A trip of the feedwater pump turbines limits further increase in reactor vessel water level by limiting further addition of feedwater to the reactor vessel. A trip of the main turbine and closure of the stop valves protects the turbine from damage due to water entering the turbine.

APPLICABLE SAFETY ANALYSES

The feedwater and main turbine high water level trip instrumentation is assumed to be capable of providing a turbine trip in the design basis transient analysis for a feedwater controller failure, maximum demand event (Ref. 1). The Level 8 trip indirectly initiates a reactor scram from the main turbine trip (above 30% RTP) and trips the feedwater pumps, thereby terminating the event. The reactor scram mitigates the reduction in MCPR.

(continued)

BASES

APPLICABLE
SAFETY ANALYSES
(continued)

Feedwater and main turbine high water level trip instrumentation satisfies Criterion 3 of 10 CFR 50.36(c)(2)(ii) (Ref. 2).

LCO

The LCO requires three channels of the Reactor Vessel Water Level-High (Level 8) instrumentation to be OPERABLE to ensure that no single instrument failure will prevent the feedwater pump turbines and main turbine trip on a valid Level 8 signal. Two of the three channels are needed to provide trip signals in order for the feedwater and main turbine trips to occur. Each channel must have its setpoint set within the specified Allowable Value of SR 3.3.2.2.3. The Allowable Value is set to ensure that the thermal limits are not exceeded during the event. The Allowable Value is referenced from a level of water 352.56 inches above the lowest point in the inside bottom of the reactor pressure vessel and also corresponds to the top of a 144 inch fuel column (Ref. 3). The actual setpoint is calibrated to be consistent with the applicable setpoint methodology assumptions. Nominal trip setpoints are specified in the setpoint calculations. The nominal setpoints are selected to ensure that the setpoints do not exceed the Allowable Value between successive CHANNEL CALIBRATIONS. Operation with a trip setpoint less conservative than the nominal trip setpoint, but within its Allowable Value, is acceptable. A channel is inoperable if its actual trip setpoint is not within its required Allowable Value.

Trip setpoints are those predetermined values of output at which an action should take place. The setpoints are compared to the actual process parameter (e.g., reactor vessel water level), and when the measured output value of the process parameter exceeds the setpoint, the associated device (e.g., alarm unit) changes state. The analytic limits are derived from the limiting values of the process parameters obtained from the safety analysis. The trip setpoints are derived from the analytic limits and account for all worst case instrumentation uncertainties as appropriate (e.g., drift, process affects, calibration uncertainties, and severe environmental errors (for channels that must function in harsh environments as defined by 10 CFR 50.49)). The trip setpoints derived in this manner provide adequate protection because all expected uncertainties are accounted for. The Allowable Values are

(continued)

Ref 3.3.2.2-1

BASES

LCO
(continued) then derived from the trip setpoints by accounting for normal effects that would be seen during periodic surveillance or calibration. These effects are instrumentation uncertainties during normal operation (e.g., drift and calibration uncertainties).

APPLICABILITY The feedwater and main turbine high water level trip instrumentation is required to be OPERABLE at $\geq 25\%$ RTP to ensure that the fuel cladding integrity Safety Limit and the cladding 1% plastic strain limit are not violated during the feedwater controller failure, maximum demand event. As discussed in the Bases for LCO 3.2.1, "Average Planar Linear Heat Generation Rate (APLHGR)," and LCO 3.2.2, "MINIMUM CRITICAL POWER RATIO (MCPR)," sufficient margin to these limits exists below 25% RTP; therefore, these requirements are only necessary when operating at or above this power level.

ACTIONS A Note has been provided to modify the ACTIONS related to feedwater and main turbine high water level trip instrumentation channels. Section 1.3, Completion Times, specifies that once a Condition has been entered, subsequent divisions subsystems, components, or variables expressed in the Condition, discovered to be inoperable or not within limits, will not result in separate entry into the Condition. Section 1.3 also specifies that Required Actions of the Condition continue to apply for each additional failure, with Completion Times based on initial entry into the Condition. However, the Required Actions for inoperable feedwater and main turbine high water level trip instrumentation channels provide appropriate compensatory measures for separate inoperable channels. As such, a Note has been provided that allows separate Condition entry for each inoperable feedwater and main turbine high water level trip instrumentation channel.

(continued)

RAE-3.3.2.2-1

BASES

ACTIONS
(continued)

A.1

With one channel inoperable, the remaining two OPERABLE channels can provide the required trip signal. However, overall instrumentation reliability is reduced because a single failure in one of the remaining channels concurrent with feedwater controller failure, maximum demand event, may result in the instrumentation not being able to perform its intended function. Therefore, continued operation is only allowed for a limited time with one channel inoperable. If the inoperable channel cannot be restored to OPERABLE status within the Completion Time, the channel must be placed in the tripped condition per Required Action A.1. Placing the inoperable channel in trip would conservatively compensate for the inoperability, restore capability to accommodate a single failure, and allow operation to continue with no further restrictions. Alternately, if it is not desired to place the channel in trip (e.g., as in the case where placing the inoperable channel in trip would result in a feedwater or main turbine trip), Condition C must be entered and its Required Action taken.

The Completion Time of 7 days is based on the low probability of the event occurring coincident with a single failure in a remaining OPERABLE channel.

B.1

With two or more channels inoperable, the feedwater and main turbine high water level trip instrumentation cannot perform its design function (feedwater and main turbine high water level trip capability is not maintained). Therefore, continued operation is only permitted for a 2 hour period, during which feedwater and main turbine high water level trip capability must be restored. The trip capability is considered maintained when sufficient channels are OPERABLE or in trip such that the feedwater and main turbine high water level trip logic will generate a trip signal on a valid signal. This requires two channels to each be OPERABLE or in trip. If the required channels cannot be restored to OPERABLE status or placed in trip, Condition C must be entered and its Required Action taken.

(continued)

BASES

ACTIONS

B.1 (continued)

The 2 hour Completion Time is sufficient for the operator to take corrective action, and takes into account the likelihood of an event requiring actuation of feedwater and main turbine high water level trip instrumentation occurring during this period. It is also consistent with the 2 hour Completion Time provided in LCO 3.2.2 for Required Action A.1, since this instrumentation's purpose is to preclude a MCPR violation.

C.1 and C.2

With the required channels not restored to OPERABLE status or placed in trip, THERMAL POWER must be reduced to < 25% RTP within 4 hours. Alternatively, the affected stop valve(s) may be removed from service since this performs the intended function of the instrumentation. As discussed in the Applicability section of the Bases, operation below 25% RTP results in sufficient margin to the required limits, and the feedwater and main turbine high water level trip instrumentation is not required to protect fuel integrity during the feedwater controller failure, maximum demand event. The allowed Completion Time of 4 hours is based on operating experience to reduce THERMAL POWER to < 25% RTP from full power conditions in an orderly manner and without challenging plant systems. Required Action C.1 is modified by a Note which states that the Required Action is only applicable if the inoperable channel is the result of an inoperable feedwater pump turbine stop valve or main turbine stop valve. The Note clarifies the situations under which the associated Required Action would be the appropriate Required Action.

SURVEILLANCE
REQUIREMENTS

The Surveillances are modified by a Note to indicate that when a channel is placed in an inoperable status solely for performance of required Surveillances, entry into associated Conditions and Required Actions may be delayed for up to 6 hours provided the associated Function maintains feedwater and main turbine high water level trip capability. Upon completion of the Surveillance, or expiration of the 6 hour allowance, the channel must be returned to OPERABLE status or the applicable Condition entered and Required Actions taken. This Note is based on the reliability analysis (Ref. 4) assumption that 6 hours is the average time required to perform channel Surveillance. That analysis

(continued)

TSFC -
TJF -
297
TJF -
297

BASES

SURVEILLANCE
REQUIREMENTS
(continued)

demonstrated that the 6 hour testing allowance does not significantly reduce the probability that the feedwater pump turbines and main turbine will trip when necessary.

SR 3.3.2.2.1

Performance of the CHANNEL CHECK once every 24 hours ensures that a gross failure of instrumentation has not occurred. A CHANNEL CHECK is normally a comparison of the parameter indicated on one channel to a similar parameter on other channels. It is based on the assumption that instrument channels monitoring the same parameter should read approximately the same value. Significant deviations between instrument channels could be an indication of excessive instrument drift in one of the channels, or something even more serious. A CHANNEL CHECK will detect gross channel failure; thus, it is key to verifying the instrumentation continues to operate properly between each CHANNEL CALIBRATION.

Channel agreement criteria are determined by the plant staff based on a combination of the channel instrument uncertainties, including indication and readability. If a channel is outside the criteria, it may be an indication that the instrument has drifted outside its limits.

The Frequency is based on operating experience that demonstrates channel failure is rare. The CHANNEL CHECK supplements less formal, but more frequent, checks of channel status during normal operational use of the displays associated with the channels required by the LCO.

SR 3.3.2.2.2

A CHANNEL FUNCTIONAL TEST is performed on each required channel to ensure that the channel will perform the intended function. A successful test of the required contacts(s) of a channel relay may be performed by the verification of the change of state of a single contact of the relay. This clarifies what is an acceptable CHANNEL FUNCTIONAL TEST of a relay. This is acceptable because all of the other required contacts of the relay are verified by other Technical Specifications and non-Technical Specifications tests at least once per refueling interval with applicable extensions. Any setpoint adjustment shall be consistent with the assumptions of the current plant specific setpoint methodology.

TS/F-205R3

(continued)

BASES

SURVEILLANCE
REQUIREMENTS

SR 3.3.2.2.2 (continued)

As noted, the CHANNEL FUNCTIONAL TEST is only required to be performed when in MODE 4 for > 24 hours. In MODE 4, while the plant is in a condition where a loss of a feedwater pump turbine or a main turbine trip will not jeopardize steady state power operation. The design of the trip systems do not permit functional testing of this trip function without lifting electrical leads. Consequently, testing the trip systems on-line poses an unacceptable risk of an inadvertent trip of the feedwater pump turbines and main turbine, resulting in a plant transient. The 24 hours is intended to indicate an outage of sufficient duration to allow for scheduling a proper performance of the Surveillance.

The 92 day Frequency and the Note to this Surveillance was approved by the Nuclear Regulatory Commission as documented in Reference 5.

SR 3.3.2.2.3

CHANNEL CALIBRATION is a complete check of the instrument loop and the sensor. This test verifies the channel responds to the measured parameter within the necessary range and accuracy. CHANNEL CALIBRATION leaves the channel adjusted to account for instrument drifts between successive calibrations consistent with the plant specific setpoint methodology.

The Frequency is based upon the assumption of a 24 month calibration interval in the determination of the magnitude of equipment drift in the setpoint analysis.

SR 3.3.2.2.4

The LOGIC SYSTEM FUNCTIONAL TEST demonstrates the OPERABILITY of the required trip logic for a specific channel. The system functional test of the feedwater and main turbine valves is included as part of this Surveillance and overlaps the LOGIC SYSTEM FUNCTIONAL TEST to provide complete testing of the assumed safety function. Therefore, if a valve is incapable of operating, the associated instrumentation would also be inoperable. The 24 month Frequency is based on the need to perform this Surveillance under the conditions that apply during a plant outage and the potential for an unplanned transient if the Surveillance were performed with the reactor at power. Operating experience has shown that these components usually pass the Surveillance when performed at the 24 month Frequency.

(continued)

BASES (continued)

- REFERENCES
1. UFSAR, Section 14.5.9.
 2. 10 CFR 50.36(c)(2)(ii).
 3. Drawing 11825-5.01-15D, Rev. D, Reactor Assembly Nuclear Boiler, (GE Drawing 919D690BD).
 4. GENE-770-06-1-A, Bases for Changes To Surveillance Test Intervals And Allowed Out-Of-Service Times for Selected Instrumentation Technical Specifications, December 1992.
 5. NRC letter dated June 19, 1995, Amendment 225 for James A. FitzPatrick Nuclear Power Plant.
-
-

B 3.3 INSTRUMENTATION

B 3.3.3.1 Post Accident Monitoring (PAM) Instrumentation

BASES

BACKGROUND

The primary purpose of the PAM instrumentation is to display plant variables that provide information required by the control room operators during accident situations. This information provides the necessary support for the operator to take the manual actions for which no automatic control is provided and that are required for safety systems to accomplish their safety functions for Design Basis Events. The instruments that monitor these variables are designated as Type A, Category 1, and non-Type A, Category 1, in accordance with Regulatory Guide 1.97 (Ref. 1).

The OPERABILITY of the accident monitoring instrumentation ensures that there is sufficient information available on selected plant parameters to monitor and assess plant status and behavior following an accident. This capability is consistent with the recommendations of Reference 1.

APPLICABLE SAFETY ANALYSES

The PAM instrumentation LCO ensures the OPERABILITY of Regulatory Guide 1.97, Type A variables so that the control room operating staff can:

- Perform the diagnosis specified in the Emergency Operating Procedures (EOPs). These variables are restricted to preplanned actions for the primary success path of Design Basis Accidents (DBAs), (e.g., loss of coolant accident (LOCA)), and
- Take the specified, preplanned, manually controlled actions for which no automatic control is provided, which are required for safety systems to accomplish their safety function.

The PAM instrumentation LCO also ensures OPERABILITY of Category 1, non-Type A, variables so that the control room operating staff can:

- Determine whether systems important to safety are performing their intended functions;

(continued)

BASES

APPLICABLE
SAFETY ANALYSES
(continued)

- Determine the potential for causing a gross breach of the barriers to radioactivity release;
- Determine whether a gross breach of a barrier has occurred; and
- Initiate action necessary to protect the public and for an estimate of the magnitude of any potential exposure.

The plant specific Regulatory Guide 1.97 Analysis (Ref. 2) documents the process that identified Type A and Category 1, non-Type A, variables.

Accident monitoring instrumentation that satisfies the definition of Type A in Regulatory Guide 1.97 meets Criterion 3 of 10 CFR 50.36(c)(2)(ii) (Ref. 3). Category 1, non-Type A, instrumentation is retained in Technical Specifications (TS) because they are intended to assist operators in minimizing the consequences of accidents. Therefore, these Category 1 variables are important for reducing public risk.

LCO

LCO 3.3.3.1 requires two OPERABLE channels for all but one Function to ensure that no single failure prevents the operators from being presented with the information necessary to determine the status of the plant and to bring the plant to, and maintain it in, a safe condition following an accident. Furthermore, provision of two channels allows a CHANNEL CHECK during the post accident phase to confirm the validity of displayed information.

The exception to the two channel requirement is primary containment isolation valve (PCIV) position. In this case, the important information is the status of the primary containment penetrations. The LCO requires one position indicator for each active PCIV. This is sufficient to redundantly verify the isolation status of each isolable penetration either via indicated status of the active valve and prior knowledge of passive valve or via system boundary status. If a normally active PCIV is known to be closed and deactivated, position indication is not needed to determine status. Therefore, the position indication for valves in this state is not required to be OPERABLE.

(continued)

BASES

LCO
(continued)

The following list is a discussion of the specified instrument Functions listed in Table 3.3.3.1-1 in the accompanying LCO.

1. Reactor Vessel Pressure

Reactor vessel pressure is a Category 1 variable provided to support monitoring of Reactor Coolant System (RCS) integrity and to verify operation of the Emergency Core Cooling Systems (ECCS). Two independent pressure transmitters with a range of 0 psig to 1500 psig monitor pressure and associated independent wide range recorders are the primary indication used by the operator during an accident. Therefore, the PAM Specification deals specifically with these portions of the instrument channel.

2. Reactor Vessel Water Level

Reactor vessel water level is a Category 1 variable provided to support monitoring of core cooling and to verify operation of the ECCS. The reactor vessel water level channels provide the PAM Reactor Vessel Water Level Function. The reactor vessel water level channels cover a range from -150 inches (just below the bottom of the active fuel) to +224.5 inches, as referenced (zero) from the top of active fuel (TAF). Reactor vessel water level is measured in overlapping stages by separate independent differential pressure transmitters. Two reactor vessel water level (fuel zone) channels monitor the range from -150 inches to +200 inches (TAF). One fuel zone channel consists of a transmitter and indicator and the other channel consists of a transmitter and recorder. Two reactor vessel water level (wide range) channels monitor the range from +14.5 inches to +224.5 inches (TAF). The upper limit corresponds to a level of 63.5 inches below the centerline of the main steam lines. Likewise, one wide range channel consists of a transmitter and indicator and the other channel consists of a transmitter and recorder. These transmitters and associated indicators and recorders provide the primary indication used by the operator during an accident. Therefore, the PAM Specification deals specifically with these portions of the instrument channel.

(continued)