E:\06-442\CATCHMENT-BASIN\VOLUME-CALC-2.dwg SAVED: 3/13/08 PRINTED: 3/13/08 BY: MARIE.LAMB

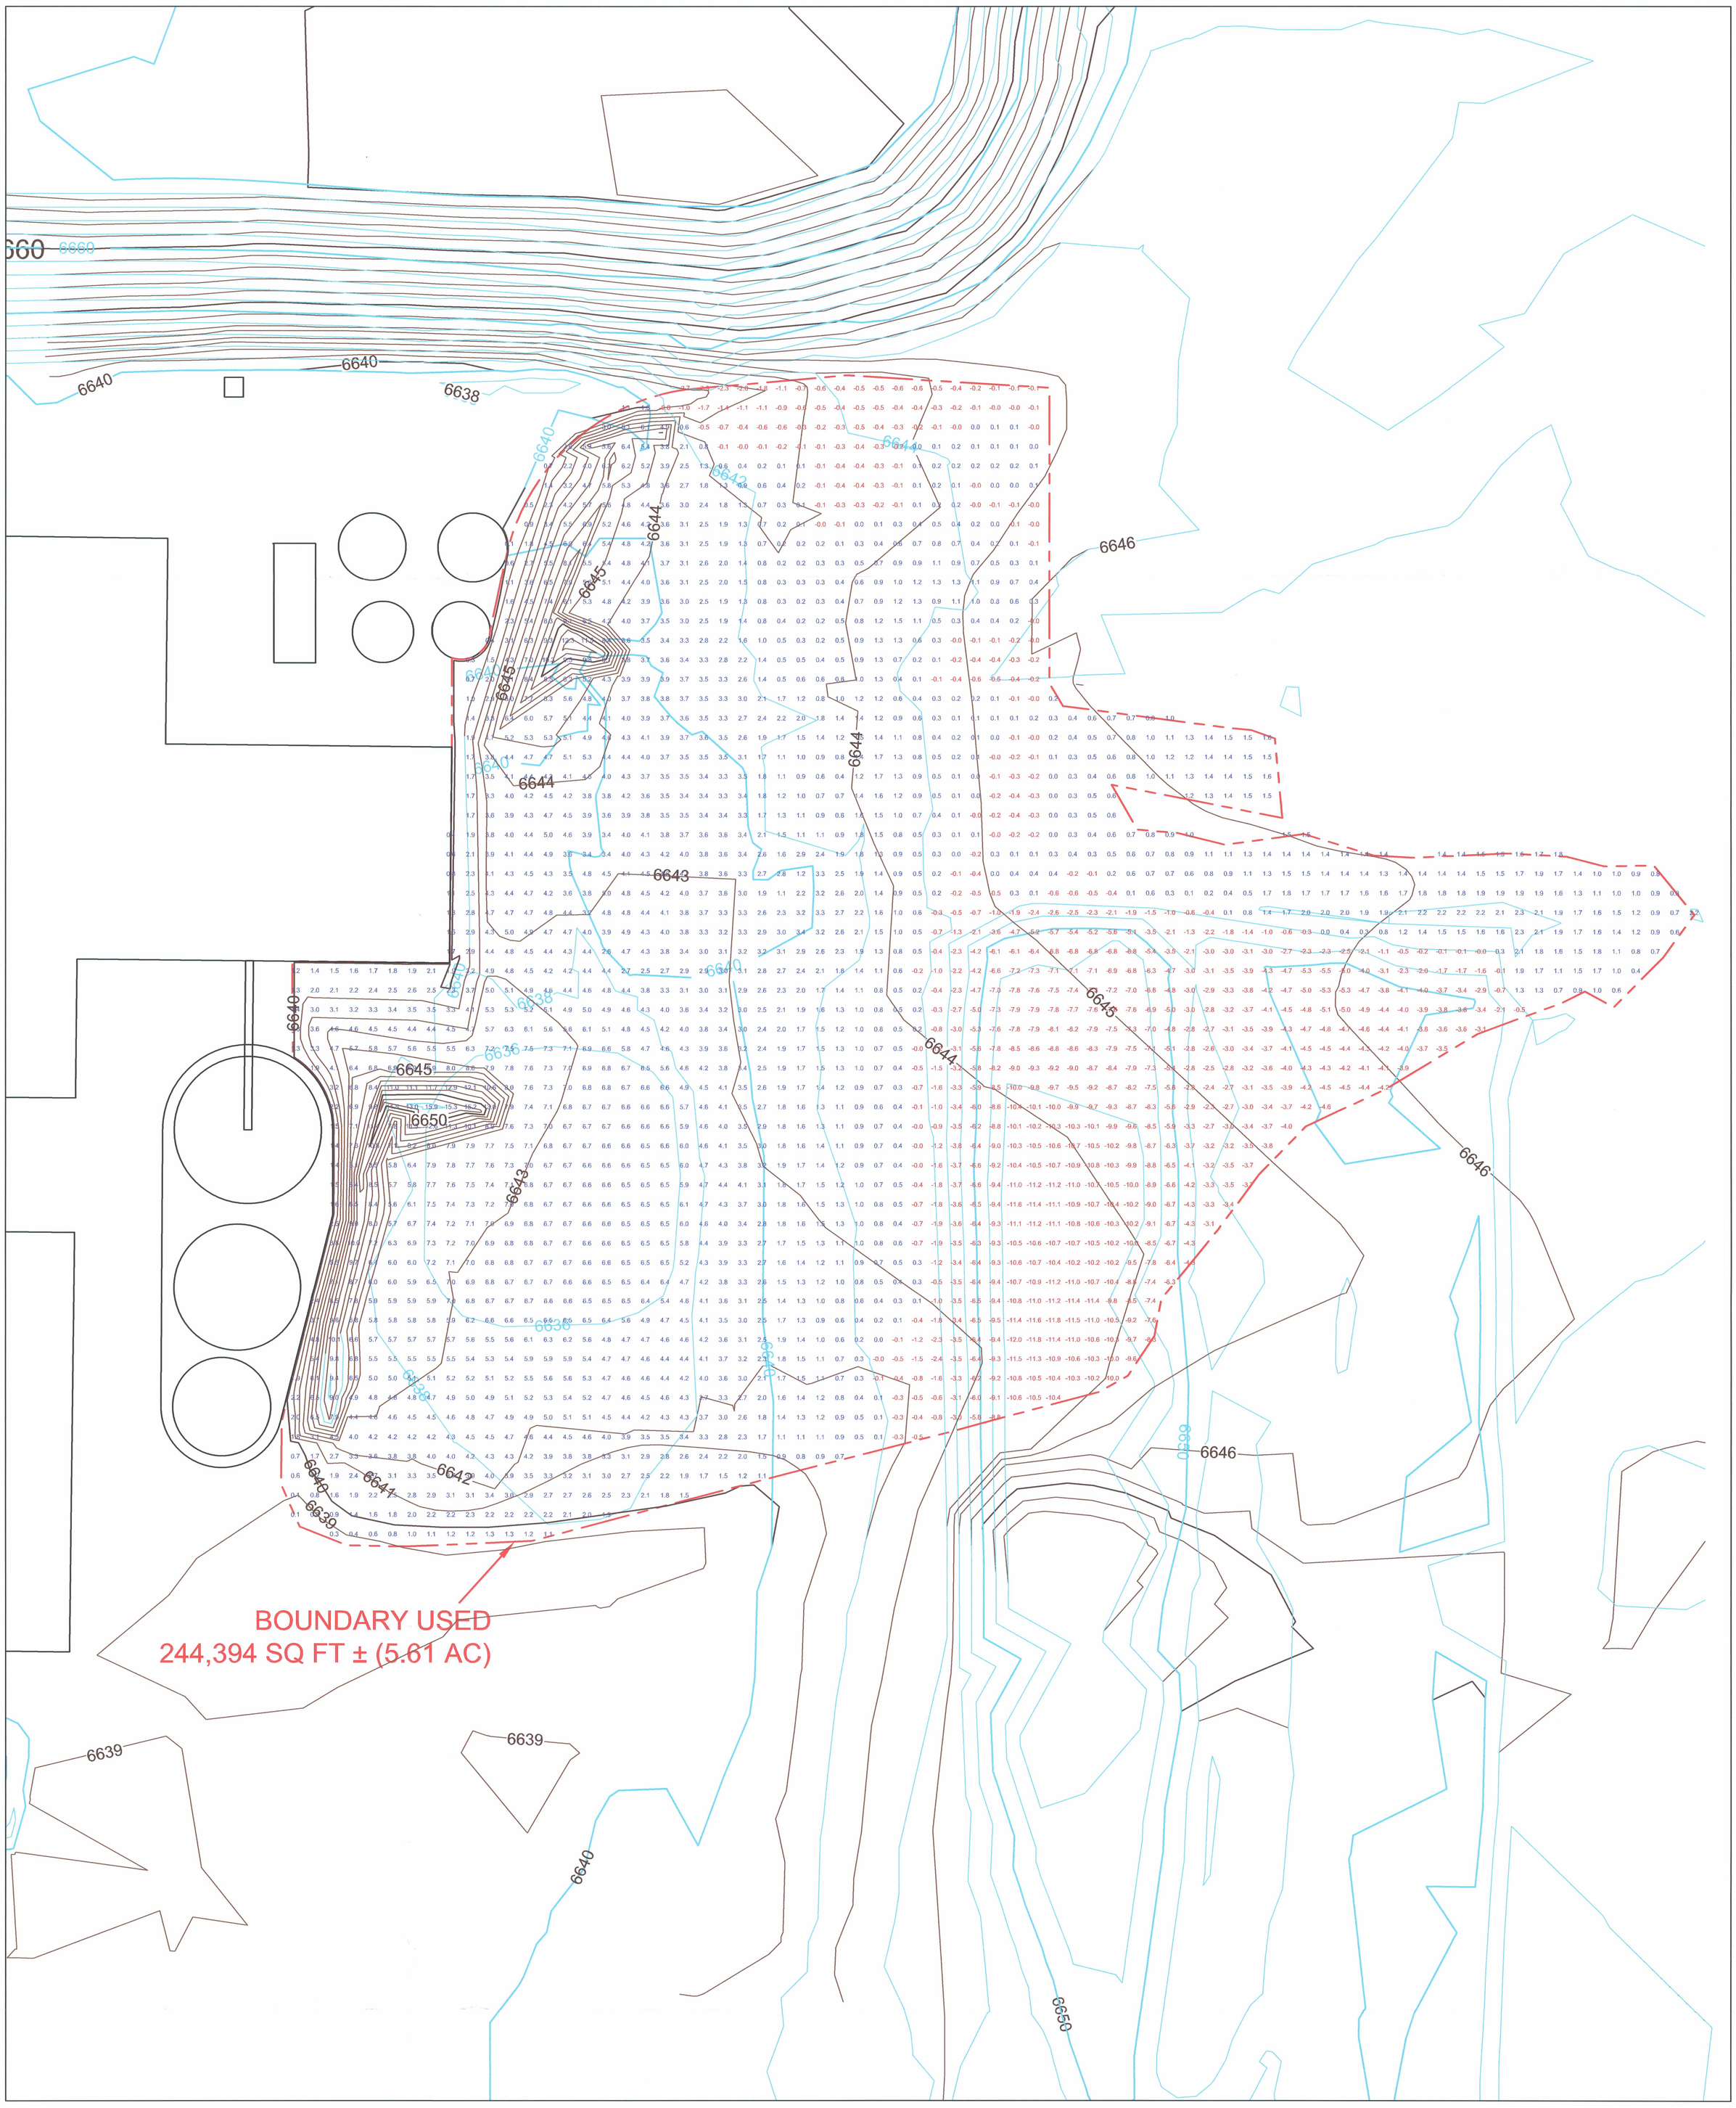


Parcel Volume Table: Unadjusted

| Parcel | Stratum | Surf1 | Surf2 | Cut cu yards | Fil cu yards | Net | |
|---|---|---|---|---|---|---|---|
| EXCAVATION AREA | pre-post-2 | pre-exc-pts | post-exc-pts | 10,736 | 21,004 | 10,268 (F) | Grid |

NORTH

SCALE IN FEET

40' 0 80'

LEGEND:

- PRE-EXCAVATION CONTOURS
- EXCAVATION CONTOURS
- POST EXCAVATION CONTOURS
- VOLUME CALCULATION BOUNDARY

| | |
|---|---|
| PROJECT NO: | 180889 |
| DATE: | MARCH 2008 |
| DESIGNED BY: | |
| DRAWN BY: | MCL |
| CHECKED BY: | OP |
| APPROVED BY: | OP |

PREPARED BY:

**SWEETWATER URANIUM PROJECT**
**CATCHMENT BASIN**
**VOLUME CALCULATION**
**PRE-CONSTRUCTION VERSUS**
**POST-CONSTRUCTION**

PREPARED FOR: Kennecott Energy

DRAWING NO. 1

D-04