

**Table of Contents**

|       |                                 |    |
|-------|---------------------------------|----|
| 2.5   | Socioeconomics .....            | 5  |
| 2.5.1 | Demography .....                | 5  |
| 2.5.2 | Community Characteristics ..... | 13 |
| 2.5.3 | Historical Properties .....     | 36 |
| 2.5.4 | Environmental Justice .....     | 40 |

**List of Tables**

|   |    |
|---|----|
| Table 2.5-1—{Counties of Residence for Existing CCNPP Units 1 and 2 Operational Employees} .....  | 50 |
| Table 2.5-2— {Select Demographic and Economic Characteristics of Residential Population, By Distance from the CCNPP Site, 2000} .....                                   | 51 |
| Table 2.5-3—{Historical and Projected Populations in Calvert County, St. Mary's County, and Maryland from 1970 to 2030} .....   | 52 |
| Table 2.5-4—{Select Demographic and Economic Characteristics of Persons in Calvert County, St. Mary's County, Maryland, and the U.S. From 2000 to 2004} .....           | 53 |
| Table 2.5-5—{Demographic and Economic Characteristics of Residential Populations in Select Cities and Communities within Calvert County and St. Mary's County, 2000} .. | 54 |
| Table 2.5-6—{Resident and Transient Populations, by Sector and Distance from the CCNPP Site, 2000} .....  | 56 |
| Table 2.5-7—{Commuting Patterns To and From the ROI, 2000} .....  | 58 |
| Table 2.5-8—{Current Population and Population Projections for the {CCNPP} Low Population Zone} .....   | 59 |
| Table 2.5-9—{Population Projections from 2000 to 2060 within 50 mi (80 km) of the CCNPP Site} .....   | 60 |
| Table 2.5-10—{Population Projections by Sector and Distance from the CCNPP Site from 2000 to 2060} .....  | 61 |
| Table 2.5-11—{Counties of Residence of the Existing Operational Workforce at CCNPP Units 1 and 2, November 2006} .....  | 73 |
| Table 2.5-12—{Civilian Labor Force Data for Calvert County and St. Mary's County, October 2006} .....   | 74 |
| Table 2.5-13—{Construction and Extraction Occupational Labor Force, Washington-Arlington-Alexandria Metro Area, May 2005} .....   | 75 |
| Table 2.5-14—{Employment by Sectors and Industry in Calvert County St. Mary's County, and ROI, 2005} .....  | 78 |
| Table 2.5-15—{Major Non-Governmental Employers in Calvert County and St. Mary's County, 2005} .....   | 79 |
| Table 2.5-16—{Fastest Growing Private Industries in Calvert County and St. Mary's County, from 2004 to 2005} .....  | 80 |
| Table 2.5-17—{Percent of Individuals in Poverty and Median Household Income in Calvert County and St. Mary's County, Maryland, and the U.S. 2000 and 2005} .....        | 81 |
| Table 2.5-18—{Mean Salaries in Calvert County, St. Mary's County Maryland, and the U.S. 2005} .....   | 82 |
| Table 2.5-19—{Occupied Housing Units and Vacant (available) Housing Units in Calvert County, St. Mary's County, and the ROI, 2000} .....                                | 83 |
| Table 2.5-20—{New Housing Units (Single-family and Multi-family) Authorized for Construction, Calvert County and St Mary's County from 2001 to 2005} .....              | 84 |
| Table 2.5-21—{Apartment and Townhouse Complexes in Calvert County and St. Mary's County} .....  | 85 |
| Table 2.5-22—{Hotels, Motels, and Bed & Breakfasts Within About 30 Miles (48.2 km) of Lusby, Maryland} .....  | 87 |
| Table 2.5-23—{Public Schools Located in Calvert County and St. Mary's County} .....   | 89 |
| Table 2.5-24—{Private Schools Located in Calvert County and St. Mary's County} .....  | 91 |

|  |     |
|--|-----|
| Table 2.5-25—{Boat Ramps and Public Landing/Launch Sites in Calvert County and St. Mary's County, Roughly from Closest to Farthest from the CCNPP Site} .....                      | 93  |
| Table 2.5-26—{Marinas in Calvert County and St. Mary's County, Roughly from Closest to Farthest from the CCNPP Site} .....   | 94  |
| Table 2.5-27—{Charter Boat Services/Associations in Calvert County and St. Mary's County, Roughly from Closest to Farthest from the CCNPP Site} .....                              | 96  |
| Table 2.5-28—{Campgrounds and RV Parks Within About 30 Miles (48.3 km) of Lusby, Maryland} .....   | 98  |
| Table 2.5-29—{Property and Income Tax Rates in Calvert County and St. Mary's County, 2006} .....   | 99  |
| Table 2.5-30—{Fiscal Year 2005 Actual County Revenues and Expenditures in Calvert County and St. Mary's County (rounded, in 2005 million dollars)} .....                           | 100 |
| Table 2.5-31—{Calvert County General Fund Revenues and County-wide Taxable Assessed Property Values, 2000 to 2005} .....   | 102 |
| Table 2.5-32—{Water Districts/Systems in Calvert County and St. Mary's County} .....   | 103 |
| Table 2.5-33—{Sewer Districts/Systems in Calvert County and St. Mary's County} .....   | 105 |
| Table 2.5-34—{Fiscal Year 2005 Actual Law Enforcement Agency Staffing, Budgets, and Calls for Service in Calvert County and St. Mary's County} .....                               | 106 |
| Table 2.5-35—{Fire/EMS Departments in Calvert County and St. Mary's County} .....  | 107 |
| Table 2.5-36—{EMS Calls for Service in Calvert County and St. Mary's County, June 2005 to May 2006} .....  | 109 |
| Table 2.5-37—{Peak Hour Traffic Volumes at Calvert Cliffs Parkway and MD 2/4} .....  | 110 |
| Table 2.5-38—{Summary of Surveyed Architectural Resources} .....   | 111 |
| Table 2.5-39—{Summary of Surveyed Archaeological Sites} .....  | 112 |
| Table 2.5-40—{Summary of Identified Isolated Finds} .....  | 114 |
| Table 2.5-41—{Summary of Potentially Eligible Archaeological Sites (a)} .....  | 115 |
| Table 2.5-42—{Summary of Eligible Architectural Resources (a)} .....   | 116 |
| Table 2.5-43—{Census Block Groups within 50 mi (80 km) of the {CCNPP} Site with Minority and Low Income Populations} .....   | 117 |
| Table 2.5-44—{Census Block Groups and Percentages of Minority People Within 50 mi (80km) of the {CCNPP} Site} .....  | 120 |
| Table 2.5-45—{Census Block Groups and Percentage of Households within 50 mi (80 km) of the {CCNPP} Site with Low Income Populations} .....   | 121 |
| Table 2.5-46—{Estimated Chesapeake Bay Recreational Catches in Metric Tons, Maryland and Virginia Combined, 1995 and 2000} .....   | 122 |
| Table 2.5-47—{Chesapeake Bay Recreational Top Five Species Most Commonly Caught and Consumed Fish, Lower Patapsco and Back Rivers, in the Baltimore Region, Maryland, 2004} .....  | 123 |
| Table 2.5-48—{Chesapeake Bay Recreational Top Five Species Most Commonly Caught and Consumed Fish, Lower Potomac and Anacostia Rivers, in the Washington, D.C. Region, 2004} ..... | 124 |
| Table 2.5-49—{Chesapeake Bay Recreational Top Ten Species Most Commonly Caught and Consumed Fish, Elizabeth and James Rivers, in the Tidewater Region, Virginia, 2004} .....       | 125 |
| Table 2.5-50—{Chesapeake Bay Recreational Fishing Characteristics for Minority Populations, Lower Patapsco and Back Rivers, in the Baltimore Region, Maryland, 2004} .....         | 126 |

|   |     |
|---|-----|
| Table 2.5-51—{Chesapeake Bay Recreational Fishing Characteristics for Minority Populations, Lower Potomac and Anacostia Rivers, in the Washington, D.C. Region, 2004} .....   | 127 |
| Table 2.5-52—{Chesapeake Bay Recreational Fishing Characteristics for Minority Populations, Elizabeth and James Rivers, in the Tidewater Region, Virginia, 2004} .....        | 128 |
| Table 2.5-53—{Chesapeake Bay Recreational Fishing Characteristics for Low Income Populations, Lower Potomac and Anacostia Rivers, in the Washington, D.C. Region, 2004} ..... | 130 |
| Table 2.5-54—{Chesapeake Bay Recreational Fishing Characteristics for Low Income Populations, Elizabeth and James Rivers, in the Tidewater Region, Virginia, 2004} .....      | 131 |



**List of Figures**

|   |     |
|---|-----|
| Figure 2.5-1— {CCNPP Site 50 mi (80 km) Vicinity} .....             | 132 |
| Figure 2.5-2— {CCNPP Site 10 mi (16 km) Vicinity} .....             | 133 |
| Figure 2.5-3— {CCNPP Units 1, 2 and 3 Low Population Zone} .....    | 134 |
| Figure 2.5-4— {Black or African American Minority Population} ..... | 135 |
| Figure 2.5-5— {Asian Minority Population} .....                     | 136 |
| Figure 2.5-6— {Some Other Minority Population} .....                | 137 |
| Figure 2.5-7— {Aggregate Minority Population} .....                 | 138 |
| Figure 2.5-8— {Hispanic Ethnicity Minority Population} .....        | 139 |
| Figure 2.5-9— {Low Income Population} .....                         | 140 |

## 2.5 SOCIOECONOMICS

This section describes the socioeconomic characteristics of the areas that could potentially be impacted by the construction and operation of {Calvert Cliffs Nuclear Power Plant (CCNPP) Unit 3 on the CCNPP site}. This section contains four subsections: 1) Demography, 2) Community Characteristics, 3) Historic Properties, and 4) Environmental Justice. {These sections include a discussion about the socioeconomic characteristics of the 50 mi (80 km) comparative geographic area and the two-county region of influence (ROI) that includes Calvert County and St. Mary's County, which are the primary areas of concern for the socioeconomic impact assessment.} In addition, socioeconomic characteristics are also described for the 10 mi (16 km) emergency planning zone and the {2 mi (3.2 km)} low population zone (LPZ), which are consistent with NUREG-1555 (NRC, 1999).

The 50 mi (80 km) comparative geographic area was established by using the {CCNPP} site as the center point and drawing a 50 mi (80 km) radius circle around the {CCNPP} site. This comparative geographic area is consistent with NUREG-1555 (NRC, 1999), as a basis for conducting the socioeconomic analyses and evaluating the potential radiological and accident impacts.

{The region of influence (ROI) for the socioeconomic analyses include Calvert County and St. Mary's County, Maryland. The borders of these counties extend less than 30 mi (48 km) from the CCNPP site. These adjacent counties are located in the southern part of Maryland on a peninsula bounded by the Chesapeake Bay and the Patuxent River. Potential socioeconomic impacts, if any, arising from the proposed plant are likely to be confined to these two counties because a majority of the existing workforce for CCNPP Units 1 and 2 reside in these counties and it is assumed that the potential in-migrating construction and operational workforces for CCNPP Unit 3 are most likely to reside in this same two-county ROI. As of November 2006 a total of 833 employees work at the CCNPP site. Of this total, 793 of them are Constellation Energy employees and 40 are contractors. As shown in Table 2.5-1, more than 91% of the current workforce at CCNPP resides in Calvert County or St. Mary's County. Of the 833 employees at the CCNPP site, approximately 560 (67%) of the workers had a home address in Calvert County and approximately 200 (24%) of these workers had a home address in St. Mary's County.}

### 2.5.1 DEMOGRAPHY

#### 2.5.1.1 Current Demographic and Economic Characteristics

The following sections describe the current demographic and economic characteristics for the 50 mi (80 km) comparative geographic area, the {two-county} region of influence, the 10 mi (16 km) emergency planning zone, and the {2 mile (3.2 km)} LPZ. {Most demographic data generated by the U.S. Census Bureau and used in this analysis is from the year 2000, sometimes updated to 2003, 2004 or 2005, in order to have comparable data for both counties in the region of influence. Census Bureau data is used because it is the most reliable, most often cited, and most detailed data available for comparison of multiple jurisdictions or areas. The U.S. Census Bureau gathers more detail and updates demographic data more often in the metropolitan areas than in the non-metropolitan or micro communities. In some cases recent socioeconomic data is was not available for St. Mary's County.}

##### 2.5.1.1.1 50 mi (80 km) Geographic Area of Comparison

Figure 2.5.1 presents geographical details of the area within a 50 mi (80 km) radius of the {CCNPP} site. The map shows overlaying circles which mark 10, 20, 30, 40, and 50 mi (16, 32, 48, 64, and 80 km) distances from the {CCNPP} site.

{The nearest major population centers within about 50 mi (80 km) of the CCNPP site are Washington, D.C., located approximately 55 driving miles (88 km) to the northwest and Annapolis, Maryland, 50 driving miles (80 km) to the north. Smaller cities and towns within 50 driving miles (80 km) include Glenarden, 50 driving miles (80 km) away, North Beach, 26 driving miles (42 km), La Plata at 36 driving miles (58 km), Leonardtown which is 20 driving miles (32 km) and Seat Pleasant at 49 driving miles (79 km). Calvert County is part of the Washington-Arlington-Alexandria, DC-VA-MD-WV Metropolitan Statistical Area (MSA) and shares a high degree of economic and social integration with the metropolitan area. St. Mary's County is a part of the much smaller Lexington Park, Maryland Micro Area.

Table 2.5-2 (USCB, 2000c) (USCB, 2005) presents the demographic data for the residential population within each of the five 10 mi (16 km) circles radiating from the CCNPP site. These demographic characteristics – age and sex distributions, racial and ethnical distributions, and household income figures – are presented to familiarize the reader with the statistical profile of a portion of southern Maryland in 2000.

In 2000, approximately 90%, or 2,878,003 people, of the 3,195,170 people that resided within the 50 mi (80 km) radius of the CCNPP site lived more than 30 mi (48 km) from the CCNPP site. Within the 50 mi (80 km) radius, less than 7% were under 5 years old, 76% were 18 years old or older, and nearly 10% were 65 years old or older. Almost 52% of the population was female. The ethnic composition of the 50 mi (80 km) radius included 53% Caucasians, 36% African-Americans, and 8% were persons of Hispanic/Latino origin. Median household income in the area was \$57,464 and 9% of the population lived below the poverty level. (USCB, 2000c) (USCB, 2005)

The Census Bureau does not report information about the transient population in this area.}

#### **2.5.1.1.2 {Two-County} Region of Influence**

{The two-county region of influence, Calvert County and St. Mary's County, has experienced steady population growth for the last three and one-half decades, from 1970 to 2005 (MDDP, 2005). Table 2.5-3 presents the population data for select years from 1970 to 2030 in these two Maryland counties (MDDP, 2005) (USCB, 2005). Within the ROI, the population grew an annual average of 3.9% from 1970 to 1980, 3.5% from 1980 to 1990, and an annual average of 2.6% from 1990 to 2000. From 2000 to 2005, the population of Calvert County grew an annual average of 3.5%, about three times the annual average U.S. population growth rate of 1.2% per year. During that same period, the population of St. Mary's County grew an annual average of 2.3%, also substantially more than the average growth rate in the U.S. The population is expected to grow by an annual average of 2.1% from 2005 to 2010 and by an additional annual average of 1.4% from 2010 to 2020 (MDDP, 2005).

Table 2.5-4 (USCB, 2005) presents data about selected demographic and economic characteristics for the years 2000 to 2004 for persons in Calvert County and St. Mary's County. The population in the ROI grew from 160,774 in 2000 to 181,355 in 2004, an annual average of 2.5%. During that same period, Calvert County grew from 74,563 people to 86,434, an annual average of 4.0%. St. Mary's County grew from 86,211 to 94,921, an annual average of 2.5%. These growth rates are significantly greater than the average annual growth rates of 1.2% for the State of Maryland and 1.1% for the U.S.

Population densities have increased noticeably in both counties from 2000 to 2005. The year 2000 population densities were 377 people per square mile in Calvert County and 239 people per square mile in St. Mary's County. In comparison, the 2005 population density in Calvert County was 409 people per square mile and the population density in St. Mary's County was

267.4 people per square mile. Nationally, the average population density was 83.8 people per square mile in 2005 (USCB, 2005).

The age compositions of Calvert County and St. Mary's County are comparable to Maryland and the U.S. for persons under 5 years of age and for persons 18 years and over. However, both counties had somewhat smaller portions of people 65 years and older than found for Maryland and the U.S. The percentage of females in all four jurisdictions was similar. (USCB, 2005)

There were also similarities in the ethnic compositions of the two counties and the U.S. These three jurisdictions had comparable percentages of Caucasians and African-Americans. However, both counties had substantially fewer people of Hispanic/Latino origins. In comparison, the State of Maryland had substantially lower proportions of Caucasians and greater proportions of African-Americans than the two counties. The State also had more than twice as many persons of Hispanic/Latino origins than the two counties. (USCB, 2005)

In 2000, 52,433 workers, or 64.9% of the workers in the two-county area, were employed in either Calvert County or St. Mary's County (USCB, 2000b). The unemployment rate in the region remains well below state and national averages. The unemployment rate in May 2006 in Calvert County was 2.8%; in St. Mary's County the unemployment rate was 3.2%. In comparison, the May 2006 unemployment rate in the State of Maryland was 4.2%, in the MSA it was 3.8%, and nationally it was 4.6% (MDDLLR, 2006). The number of jobs in the two counties is increasing at a rate that is approximately three times the rate of job expansion in the State of Maryland as a whole (MDDLLR, 2006).

The Calvert Cliffs Nuclear Power Plant is the second largest employer in Calvert County, employing 833 people to operate CCNPP Units 1 and 2. The Patuxent River Naval Air Station is the largest employer in St. Mary's County. It is the headquarters of the Naval Air Systems Command, the Naval Warfare Center Aircraft Division, home of the U.S. Naval Test Pilot School, and is the base for the VC-6 Unmanned Aerial Vehicle Detachment (MDDBED, 2002). There are 10,500 civilian and ex-military employees, and 9,300 contractor employment at the Patuxent River Naval Air Station in FY 2005 was 20,200 persons (SMCDEC, 2006). Eighty-three percent of the Patuxent River Naval Air Station employees lived in either St. Mary's County or Calvert County (MDDBED, 2002).

The median household income in Calvert County was \$71,488 in 2003, approximately 65% higher than the national average for that year of \$43,318. The 2003 median household income in St. Mary's County of \$58,651 was approximately 35% higher than the national average that year (USCB, 2005). Much of the relatively high median household income can be attributed to growth in the number of higher income households in both counties as the area continues to attract highly paid technical and professional personnel associated with the technology base industries.

Table 2.5-6 (USCB, 2000c) presents the same demographic and economic information for several towns or communities within the two-county ROI that includes Calvert County and St. Mary's County, as described above.}

### **2.5.1.1.3 10 mi (16 km) Emergency Evacuation Area**

Figure 2.5-2 displays overlaying circles which mark 1, 2, 3, 4, 5, and 10 mi (2, 3, 5, 6, 8, and 16 km) distances from the {CCNPP} site. The area within a 10 mi (16 km) radius of the {CCNPP} site is predominately rural, dominated by farmland and forests, clusters of residential communities, and by the waters of the Chesapeake Bay. Cities and recognizable unincorporated but named

communities within a 10 mi (16 km) driving distance of the {CCNPP site include California, Calvert Beach-Long Beach, Chesapeake Ranch Estates-Drum Point, Lusby, and Prince Frederick}.

#### **2.5.1.1.3.1 Overall Demographic and Economic Characteristics**

{As shown in Table 2.5-7 (USCB, 2000b), an estimated 40,745 people reside within a 10 mi (16 km) radius of the CCNPP site. The greatest concentrations of people appear to be located to the south of the CCNPP site.}

Detailed information about the distribution of racial minority populations and low income populations within a 10 mi (16 km) radius of the site is discussed in Section 2.5.4.

#### **2.5.1.1.3.2 Transient Population Levels**

The term “transient” is used in this analysis to mean persons who live (are domiciled) outside the referenced area, but may be predictably expected to be in the area at some point. In this analysis, “transient population” includes:

- ◆ {workers, also referred to as commuters, who live permanently outside of the area but who commute to a worksite within the two-county ROI (Calvert County and St. Mary’s County) on a regular basis;
- ◆ persons who live outside the area but travel at least 50 mi (80 km) from their home to visit, shop, or tend to personal business or to conduct business within the region;
- ◆ tourists and visitors recreating in the area; and
- ◆ seasonal workers employed in the agriculture sector.}

A “visitor” in this study is considered to be a transient when the following definition is met: the individual travels, at least 50 mi (80 km) each way, into the area for the day, and seeks overnight accommodations. Individuals who simply travel through the area from a point outside the area to a destination outside the area are not included in this definition.

SECPOP 2000, a code developed for the Nuclear Regulatory Commission by Sandia National Laboratories to calculate populations by emergency planning zone sectors (NRC, 2003), was used to develop projections of the resident and transient populations by sectors, within the 10 mi (16 km) radius around the {CCNPP} site. {Population projections for the years 2010 through 2060 were projected by using year 2000 U.S. census data (USCB, 2005) (USCB, 2000c) (USCB 2000a) as the baseline data, because it is the most recent decennial census data available. The population estimates were projected using exponential growth rates calculated from state generated county population projections (DEDO, 2000) (MDP, 2005) (VEC, 2006). This data and these growth rates were then used to develop the subsequent projections. The population distribution was computed by overlaying the 2000 census block point data (the smallest unit of census data) on the grid of this calculation package.

The Calvert Cliffs Units 1 and 2 Evacuation Time Estimate report was used to obtain the estimated transient population (CCNPP, 2002). This report is distributed to the State of Maryland and the Calvert County, St. Mary’s County, and Dorchester County Emergency Management Agencies.}

Table 2.5-7 presents population distributions, by residential population and transient population in 2000, within each of sixteen geographic directional sectors at radii of 0 to 1 mi (0

to 2 km), 1 to 2 mi (2 to 3 km), 2 to 3 mi (3 to 5 km), 3 to 4 mi (5 to 6 km), 4 to 5 mi (6 to 8 km), and 5 to 10 mi (8 to 16 km) from the {CCNPP} site.

### Commuters

Table 2.5-7 summarizes the commuting patterns to and from the ROI. {The ROI experienced a net loss of 20,931 persons during the work week/work day/work hour period based on 2000 Census Bureau County-to-County Worker Flow survey data (USCB, 2000b). This out-commuting represents a significant change to the population base in the area of interest.}

### Visitors/Tourists

{Recreational use is considered to be the primary contributor to the transient population in the area. The Southern Region of Maryland, a term designated by the Maryland Office of Tourism Development to include Calvert County, St. Mary's County, and Charles County, had 541,791 visitors in 2004 (MDDBED, 2005). Major parks within the 10 mi (16 km) radius include Calvert Cliffs State Park and Flag Ponds Park.

Calvert Cliffs State Park, in the immediate vicinity of the CCNPP site, covers 1,400 acres (567 hectares) with 1,079 acres (437 hectares) designated as a wild land area. The park features 1.3 mi (2.1 km) of shoreline beneath fossil-bearing, 15 million year old cliffs (MDDNR, 2005). The park also includes a camping area, Bay Breeze Youth Campground, which is used by organized groups such as the Girl Scouts for camping. Calvert Cliffs State Park had 17,113 day visitors from July 2005 to June 2006 (FY 2006) and 2,175 overnight visitors. The peak month for day users was October with 5,650 people and the peak month for overnight users was July with 875 people. The month with the most visitors of both types was October with 6,035.

Flag Ponds Park, which is operated by the Calvert County Natural Resources Division, is open seven days a week from Memorial Day to Labor Day and weekends after that. The park has hiking trails and picnicking and receives approximately 20,000 annual visitors, primarily during the three summer months.}

### Seasonal Workers in Agriculture

{No farm in Calvert County or St. Mary's County employed seasonal, migrant workers in 2004. In addition, it is highly unlikely that seasonal agricultural migrant workers would be hired in the area in the future because the number of farms and the acres devoted to farming in the region has been declining as the land is increasingly converted to non-farm uses. (MDHRSA, 2000)}

#### 2.5.1.1.4 Low Population Zone

The LPZ is defined as a {2 mi (3.2 km)} radius from {the midpoint between the CCNPP Units 1 and 2 reactors. The 1.5 mi (2.4 km) radius from CCNPP Unit 3 is fully contained within this larger LPZ definition. Figure 2.5-3 shows both the CCNPP Unit 3 and the existing LPZ.}

##### 2.5.1.1.4.1 Overall Population Levels

{As shown in Table 2.5-8, 2,508 people resided in the LPZ in the year 2000. The communities of Lusby and Calvert Beach-Long Beach lie within the LPZ, as well as a portion of the Chesapeake Bay. Portions of Calvert Cliffs State Park and Bay Breeze Youth Campground, along with the majority of Flag Ponds Park also fall within the LPZ. No nursing homes, hospitals, prisons, or major employers (other than CCNPP) are known to exist within the LPZ (CCNPP 2002). One school, the Southern Middle School at 9615 HG Trueman Road in Lusby, is located within the LPZ 1.9 mi (3.1 km) south of CCNPP Units 1 and 2. This school had a combined student and faculty population of 771 (CCNPP, 2002).

The demographics in the LPZ are most closely compared to the Calvert Beach-Long Beach Census Designated Place (CDP) as shown in Table 2.5-6. This is the closest CDP within the LPZ.}

#### **2.5.1.1.4.2 Transient Population Levels**

{There is considerable variation in peak daily and seasonal transient population levels within the LPZ. Winter daytime population with its one large school (771 students and staff) sees the highest population. Of course, this occupancy is minimal at night. Residents in the LPZ would have the highest population at night as many workers commute to points beyond the LPZ during the day. The LPZ population would be lowest in the summer, when school is not in session.}

#### **2.5.1.2 Demographic Projections**

{As described above for transient population estimates, SECPOP 2000 was used to calculate population projections for the years 2010 through 2060, using 2000 U.S. Census data as the baseline data (DEDO, 2000) (MDP, 2005) (USCB, 2005) (VEC, 2006).}

##### **2.5.1.2.1 50 mi (80 km) Comparative Impact Area**

{Table 2.5-9 presents the 2000 estimated population in concentric rings around the CCNPP site. Table 2.5-9 also displays the projected population within those rings from 2010 to 2060. CCNPP Unit 3 is estimated to start operation in 2015 and operate for 40 years until 2055. Hence, population projections, in 10 year increments, have been provided through the year 2060. Populations for 2015, the proposed startup year, have also been provided.

Within the 50 mi (80 km) radius of the site, the average annual percent change for the 10 year periods range from 0.91% (for the years 2000 to 2010) to 1.36% (for the years 2050 to 2060). The average annual change in population between the years 2000 and 2060 is projected to be 1.5%, nearly doubling the current population (an aggregate 92% increase over the 60 year period). Calvert County is currently the fastest growing of the 23 counties in the State of Maryland; St. Mary's County is the third fastest growing. Calvert County's population grew by an annual average of 4.0% from 2000 to 2004; St. Mary's County grew by an average annual of 2.5% during the same period. (NRC, 2003) (USCB, 2000)}

Table 2.5-10 presents residential population projections from the years 2000 through 2060 for each of the 16 geographic sectors to 50 mi (80 km) from the {CCNPP} site, with the exception of 0 to 10 mile (0 to 16 km) segments which include transient populations. Demographic characteristics for the residential population in the years beyond {2000} are assumed to reflect the ratios found in year {2000}.

##### **2.5.1.2.2 {Two-County} Region of Influence**

{Within the ROI, which is comparable to the 30 mi radius in Table 2.5-9, average annual population changes ranged from 1.9% for the 2000 to 2010 period to 2.27% for the 2050 to 2060 period. Population levels would increase from 323,602 in 2000 to 1,028,054 in 2060, an average annual increase of 2.63% (an aggregate of 218% increase over the 60 year period). (NRC, 2003) (USCB, 2000c).}

##### **2.5.1.2.3 10 mi (16 km) Emergency Evacuation Area**

The population projections in Table 2.5-9 reflect an upper limit of the estimated projected population, at various points during the next several decades, because the figures include both the residential population and the estimated transient population for all years in the 0 to 10 mi (0 to 16 km) circle. {Average annual population changes would range from 1.88% for the 2000

to the 2010 period to 2.07% for the 2040 to 2050 period and also for the 2050 to 2060 period. Population levels would increase from 48,755 in 2000 to 145,458 in 2060, an average annual increase of 3.3% (an aggregate of 198% increase over the 60 year period) (NRC, 2003) (USCB, 2000c).}

#### 2.5.1.2.4 Low Population Zone

The population within the LPZ, including years {2015 and 2055, the initial year of operation for CCNPP Units 3, and the year of license expiration are provided in Table 2.5-8. Average annual population changes would range from 1.47% for the 2020 to the 2030 period to 1.54% for the 2040 to 2050 period. Population levels would increase from 2,508 in 2000 to 5,844 in 2060, an average annual increase of 2.2% (an aggregate of 133% increase over the 60 year period).}

#### 2.5.1.3 References

**{CCNPP, 2002.** Evacuation Time Estimates within the Plume Exposure Pathway Emergency Planning Zone for the Calvert Cliffs Nuclear Power Plant, Revision 6, Calvert Cliffs Nuclear Power Plant, Inc, August 2002.

**DEDO, 2000.** Delaware Population Projection Series, Delaware Economic Development Office, Website: [www.state.de.us/dedo/information/demographic\\_data/population.dpc1.shtml](http://www.state.de.us/dedo/information/demographic_data/population.dpc1.shtml), Date accessed: June 22, 2007.

**MDDBED, 2002.** Analysis of the Economic Impact of the Naval Air Station at Patuxent River and the Naval Surface Warfare Center at Indian Head, Maryland Department of Business and Economic Development, April 22, 2002.

**MDDBED, 2005.** 2005 Annual Report, Maryland Office of Tourism Development, Maryland Department of Business and Economic Development, August 15, 2006.

**MDDNR, 2005.** Calvert Cliffs State Park, Maryland Department of Natural Resources, September 22, 2006.

**MDDP, 2005.** Maryland 2005 Statistical Handbook, Maryland Department of Planning, Planning Data Services, May 23, 2006.

**MDHRSA, 2000.** Migrant and Seasonal Farm Workers: Enumeration Profiles Study, Maryland, Final, Maryland Health Resources and Service Administration, September 15, 2006.

**MDLLR, 2006.** Employment and Payroll, Maryland Department of Labor, Licensing and Regulation, September 2, 2006.

**MDP, 2005.** Historical and Projected Total Population for Maryland's Jurisdictions, Maryland Department of Planning, September 2005, Website: [www.mdp.state.md.us/msdc/dw\\_popproj.htm](http://www.mdp.state.md.us/msdc/dw_popproj.htm), June 22, 2007.

**NRC, 1999.** Standard Review Plans for Environmental Reviews for Nuclear Power Plants, NUREG-1555, Nuclear Regulatory Commission, October 1999.

**NRC, 2003.** SECPOP 2000: Sector Population, Land Fraction, and Economic Estimation Program, Nuclear Regulatory Commission, August 2003.



**SMCDEC, 2006.** Snapshot, St. Mary's County Maryland, Department of Economic and Community Development, 2006.

**USCB, 2000a.** Population Estimates Branch (density per land mile, 2001 estimates), U.S. Bureau of Census, 2000.

**USCB, 2000b.** U.S. Census Bureau, Census 2000, County-to-County Worker Flow, Website: [www.census.gov/population/www/cen2000/commuting](http://www.census.gov/population/www/cen2000/commuting), Date accessed: September 3, 2006.

**USCB, 2000c.** 2000 Decennial Census, Table DP-1: Profile of General Demographic Characteristics, U.S. Bureau of Census, 2000.

**USCB, 2005.** 2005 American FactFinder, U.S. Bureau of Census, 2005.

**VEC, 2006.** State Demographer Projections Population Data, Virginia Employment Commission, Website: <http://velma.virtuallmi.com>, Date accessed: June 22, 2007.}

## 2.5.2 COMMUNITY CHARACTERISTICS

{A number of areas are used to define community characteristics for the two county ROI, Calvert County and St. Mary's County, Maryland. These characteristics include:

- ◆ the economy in the ROI,
- ◆ the political structure of the region,
- ◆ social structure information,
- ◆ the housing in the area,
- ◆ primary, secondary, and post secondary education in the region,
- ◆ recreation activities near the CCNPP site,
- ◆ tax structure in the region,
- ◆ land use in Calvert and St. Mary's Counties,
- ◆ community infrastructure and public services available to residents of the ROI including water, sewer, police, fire, emergency medical service, hospitals, and doctors,
- ◆ transportation in the two county area, and
- ◆ a profile of any distinctive communities in the ROI.

As described in Section 2.5.1, the region of influence (ROI) is limited to Calvert County and St. Mary's County. Calvert County is included because it is the county in which the proposed CCNPP Unit 3 will be located and significant portions (67%) of the existing CCNPP Units 1 and 2 maintenance and operations work forces live there (see Table 2.5-11). St. Mary's County is also included in the ROI because significant portions (24%) of the CCNPP Units 1 and 2 maintenance and operations work forces also currently live there. A significant portion of the construction, maintenance, and operations work force for the proposed plant is also expected to live in Calvert County or St. Mary's County. The ROI is limited to these two counties because any stress

to community infrastructure and services caused by changes in the work force as a result of the proposed plant would be expected to occur in these two counties. No other county or urbanized area's community services are expected to receive stress from the proposed plant. Information about the construction industry's labor force in the Washington DC Metropolitan Statistical Area (MSA) is included because portions of the construction and operations work force could be drawn from this area.

Figures 2.5-1 and 2.5-2 are maps of the vicinity of the CCNPP site. The maps display basic geographical features such as rivers, roads, cities, and airports within a 50 mi (80 km) and 10 mi (16 km) radius of the plant and displays county boundaries.

Community characteristics of the general population in the ROI have been compared to data obtained on low income and racial minority populations in the ROI. The findings are presented in Section 2.5.4.}

### **2.5.2.1 Area Economic Base**

#### **2.5.2.1.1 50-Mile (80 km) Geographic Area of Comparison**

{Table 2.5-12 (MDDLLR, 2006a), displays data about the size of the total civilian labor force, the number of employed civilians, the number of unemployed civilians, and the rate of unemployment in October 2006 for the U.S., the state of Maryland, the Washington DC MSA, Calvert County, and St. Mary's County. The Washington DC MSA includes the District of Columbia and 5 counties in the state of Maryland, 12 counties and 5 cities in Virginia, and 2 counties in West Virginia. The Washington DC MSA had a total civilian labor force of 583,647 in October 2006, of which 22,689 (3.9%) were unemployed. In comparison, the state of Maryland had a civilian labor force of more than 3 million people with an unemployment rate of 3.7% and the United States had a civilian labor force of somewhat less than 152 million with an unemployment rate of 4.4%. (MDDLLR, 2006a)}

The Washington DC MSA could provide construction, operations, and maintenance workers for the proposed CCNPP Unit 3. Table 2.5-13 (BLS, 2005) presents data about the construction and extraction occupational labor force in the MSA, which includes Calvert County (St. Mary's County is part of the much smaller Lexington Park Maryland Micro Area). In May 2005, 108,860 people were employed in construction and extraction jobs in the MSA. These workers earned mean salaries of \$19.04 per hour and \$39,610 per year. }

#### **2.5.2.1.2 {Two-County} Region of Influence**

{Generally, the economy across the ROI can be viewed as being economically diverse, healthy, and stable. Employment in the professional and technical services, health care and social services, state and local government, and in the civilian branch of the federal government account for the 33,186 jobs or 39% of the employment in the ROI (MDDP, 2005). The relative high average salaries of workers in the ROI are directly attributable to the large number of positions in these industrial sectors.

The construction industry makes up a relatively small portion of total employment in the ROI, representing slightly more than 10% of employment in Calvert County and less than 5% in St. Mary's County (MDDLLR, 2006). Within the three county areas called "Southern Maryland," construction labor is the seventeenth fastest growing occupation, and is expected to increase from 1,610 jobs in 2002 to 2,030 in 2012. Construction manager jobs are expected to increase in this area from 610 jobs in 2002 to 805 jobs by 2012. Construction equipment operator jobs in this area are expected to increase from 435 jobs in 2002 to 585 jobs in 2012 (MDDLLR, 2006b).

Employment in fishing, forestry, and agricultural services has witnessed a decline in the last two decades. Employment in the farming sector, alone, also has been in decline for the last twenty years as the region has experienced pressures from the rapid population growth.}

### **2.5.2.1.3 {Calvert County**

Calvert County is a fast growing bedroom community of Washington D.C. and is part of that MSA. The principle economic centers within Calvert County are the towns of North Beach and Chesapeake Beach. The unincorporated but recognizable communities or “town centers” that serve as nuclei for residential, commercial, and light industrial activity and development include Calvert Beach-Long Beach, Chesapeake Ranch Estates-Drum Point, Dunkirk, Huntington, Lusby, Ownings, Prince Frederick, St. Leonard, and Solomons. The county seat is Prince Frederick.

As shown in Table 2.5-12 (MDDLLR, 2006a), Calvert County had a civilian labor force of 47,247 people in October 2006, of which 45,971 were employed and 1,276 (2.7%) were not employed. During the same month, the Washington DC MSA's unemployment rate was 3.9%, the state of Maryland's was 3.7%, and the national unemployment rate was 4.4% (all unemployment percentages are seasonally adjusted figures). Calvert County added 7,849 jobs from 2000 to 2005, thus experiencing a 19.9% aggregate growth in jobs in five years. (MDDLLR, 2006)

Table 2.5-14 (MDDLLR, 2006a) presents total, governmental, and private sector employment data by industrial sector, within Calvert County, St. Mary's County and the ROI. A total of almost 21,000 people were employed in Calvert County in 2005 (see the table note regarding this total), with almost 3,800 people employed in the governmental sector and over 17,000 people employed in the private sector. The largest governmental employment sector was the local government with over 3,400 employees, and the largest private sector employer was the trade, transportation, and utilities sector with more than 4,700 employees. (MDDLLR, 2006a)

Calvert County has 1,770 businesses, of which 15 businesses employ 100 or more workers each. As shown in Table 2.5-15 (MDDLLR, 2006), major non-governmental employers in Calvert County in 2005 included Calvert Memorial Hospital with 915 employees, Constellation Energy with 833 employees (excluding contractors), ARC of Southern Maryland with 375 employees, Walmart with 310 employees, DynCorp with 296 employees, and Recorded Books with 291 employees (MDDLLR, 2006).

The fastest growing private industries from 2004 to 2005 in Calvert County and St. Mary's County are presented in Table 2.5-16 (MDDLLR, 2006a). Within Calvert County, the credit intermediation sector was the fastest growing sector with a 32.3% increase. Other sectors experiencing more than 10% growth included merchant wholesalers of durable goods (17.4%), general merchandise stores (12.4%), and transit and ground passenger transportation (10.8%). (MDDLLR, 2006a)}

### **2.5.2.1.4 {St. Mary's County**

Within St. Mary's County, the town of Leonardtown represents an economic hub. Unincorporated communities or town centers within the county include California, Charlotte Hall, Golden Beach, and Lexington Park. As shown in Table 2.5-12 (MDDLLR, 2006a), St. Mary's had a civilian labor force of 50,375 people in October 2006, of which 48,793 were employed and 1,582 (3.1%) were not employed. During the same month, the Washington DC MSA's unemployment rate was 3.9% (MDDLLR, 2006c), the state of Maryland's was 3.7%, and the national unemployment rate was 4.4% (all unemployment percentages are seasonally adjusted

figures) (BLS, 2005) (USCB, 2006a). St. Mary's added 5,668 jobs from 2000 to 2005, thus experiencing a 12.3% growth in the number of jobs in the five year span.

As shown in Table 2.5-14 (MDDLRL, 2006a) a total of almost 37,600 people were employed in St. Mary's County in 2005 (see table note regarding this total), with more than 11,000 people employed in the governmental sector and almost 26,500 people employed in the private sector. The largest governmental employment sector was the federal government with almost 6,900 employees. Local governmental employment was similar to Calvert County. The largest private sector was the professional and business sector with more than 8,600 employees, followed by the trade, transportation, and utilities sector with almost 6,500 employees. (MDDLRL, 2006a)

St. Mary's County has over 1,830 businesses, of which 37 businesses employ 100 or more workers each. As shown in Table 2.5-15 (MDDLRL, 2006a), the largest employers in the county include Patuxent River Naval Air Station (NAS) with 10,500 employees in 2005, DynCorp/CSC with 1,500 employees, EMA with 1,000 employees, St. Mary's Hospital with 900 employees, and BAE Systems with 854 employees.

The Patuxent River NAS plays a significant role in the county's economy. This facility includes the U.S. Naval Air Systems Command, and the Naval Air Warfare Center Aircraft Division, and also provides employment for 200 defense contractors (MDDBED, 2006). In 2005, the Patuxent NAS directly employed about 3,000 military personnel and about 7,500 civilians. In addition, its supporting contractors employed about 9,400 workers. Major defense-related employers supporting the Patuxent NAS included BAE Systems Lockheed Martin, Northrop Grumman, Titan Systems, Wye Laboratories, and Boeing.

In St. Mary's County, see Table 2.5-16 (MDDLRL, 2006a), three industrial sectors experienced similar growth from 2004 to 2005. The transit and ground passenger transportation sector experienced 11.7% growth, the miscellaneous store retailer sector experienced 11.6% growth, and the nursing and residential care facilities sector experienced 11.0% growth (MDDLRL, 2006a).}

## **2.5.2.2 Area Political Structure**

### **2.5.2.2.1 50-Mile (80 km) Comparative Geographic Area**

{The 50 mi (80 km) radius centered at the CCNPP site includes all or parts of 2 counties in Delaware, 14 counties in Maryland, 16 counties in Virginia, and the District of Columbia. Data gathering and planning agencies within the 50 mi (80 km) radius of the CCNPP site include the Maryland Department of Planning, the Delaware Economic Development Office, the Virginia Employment Commission, and the U.S. Census Bureau. Individual cities, towns, and counties within the 50 mi (80 km) radius, but outside of the ROI, are represented by their respective, previously mentioned state planning/economic departments because no impacts would be expected to occur to community services in these areas.}

As described in Section 2.5.4.1, there are no federally recognized Native American tribes within the 50 mi (80 km) radius of the site, so no Native American tribes are represented in major planning functions within the area. However, the Piscataway-Conroy Confederacy, a non-recognized Indian Tribe, is located in La Plata in Douglas County, Maryland. (NAL, 2006)}

### 2.5.2.2 {Two-County} Region of Influence

{Calvert County is governed by a Board of County Commissioners. The board consists of five members elected county wide. Each of the three county districts must have at least one board member who is a resident of that district. Two other members serve at large. Officers of the Board include a President and Vice President who are elected by majority vote of the Board members. County departments include: Community Resources; Economic Development; Finance and Budget; General Services; Personnel; Planning and Zoning; Public Safety; Public Works; Technology Services and Transportation (CCCAFR, 2005).}

The county of St. Mary's is governed by a Board of County Commissioners consisting of five members. Four of these members represent one district each. Districts are defined by election districts. For example, the first Commissioner District includes the 1<sup>st</sup>, 2<sup>nd</sup>, and 9<sup>th</sup> election district. The 2<sup>nd</sup> Commissioner District includes the 3<sup>rd</sup> and 6<sup>th</sup> election districts, and so forth. the Commission President is elected at large. St. Mary's County departments include the: Department of Aging; County Attorney; Economic and Community Development; Finance; Marcey Halfway House; Information Technology; Human Resources; Land use & Growth Management; Public Works and Transportation; Recreation and Parks; and, Public Safety (SMC, 2006).

Many of the towns in both Calvert and St. Mary's Counties such as Lusby and Solomons, the nearest population centers to the CCNPP site, are census designated places but have no political or tax structure independent of the County (LMP, 2006). This included Prince Frederick, the Calvert County seat.

Incorporated towns include Leonardtown in St. Mary's County and North Beach, Calvert County. Norh Beach governance is based on a Town Council and Mayor. Its departments include Administration, Public Works, Town Clerk, and Code Enforcement. Its tax structure is based on property at \$0.67 per hundred assessed value in addition to sewer and water fees. Leonardtown governance is based on a Board of Commissioners. Town departments include Administration, Planning and Zoning, Board of Appeals and Water and Wastewater Treatment.

There are no federally recognized or non-recognized Native American tribes within the ROI, so no Native American tribes are represented in major planning functions within the area (NAL, 2006).}

~~{The county seat of Calvert County is Prince Frederick. Calvert County is governed by county commissioners, the traditional form of county government in Maryland. Calvert County is part of the Maryland 5th District of the 109th U.S. Congressional District. At the state level, Calvert County is in the state of Maryland Legislative District 27.}~~

~~The county seat of St. Mary's County is Leonardtown. St. Mary's County is also governed by county commissioners and is also part of the Maryland 5th District of the 109th U.S. Congressional District. At the state level, St. Mary's County is in Legislative District 29.~~

~~There are no federally recognized or non-recognized Native American tribes within the ROI, so no Native American tribes are represented in major planning functions within the area (NAL, 2006).}~~

### 2.5.2.3 Area Social Structure

{Calvert County and St. Mary's County comprise a relatively affluent area, offer water vistas and open lands, and lie within commuting distance of the Washington DC MSA. Two indicators of

the affluence in an area are the median household income and the poverty levels. As shown in Table 2.5-17 (USCB, 2005), the 2005 median household income was \$84,388 in Calvert County, significantly greater than the \$61,592 median household income for the state of Maryland and the \$46,242 for the U.S. From 2000 to 2005, Calvert County's median household income grew at an average annual rate of 5.6%, noticeably faster than the 3.3% for the state of Maryland and the 2.0% average annual increase for the U.S. Table 2.5-18 (USCB, 2005) provides similar information about mean salaries in Calvert County and other jurisdictions for 2005. As shown in Table 2.5-2-7-17, Calvert County's 5.5% of individuals below the poverty level is much less than the 8.2% for the state of Maryland and the 13.2% for the U.S. (USCB, 2005)

The 2005 median household income was \$62,939 in St. Mary's County, negligibly greater than the \$61,592 median household income for the state of Maryland and significantly greater than the \$46,242 for the U.S. From 2000 to 2005, St. Mary's County's median household income grew at an average annual rate of 3.0%, slightly less than the 3.3% for the state of Maryland but noticeably greater than the 2.0% average annual increase for the U.S. St. Mary's County's 9.0% of individuals below the poverty level is slightly greater than the 8.2% for the state of Maryland and much less than the 13.2% for the U.S. (USCB, 2005).

The populations of Calvert County and St. Mary's County are aging, as represented by their rising median ages. In 2000, Calvert County had a median age of 36 years and St. Mary's County had a median age of 34 years. These medians were similar to the state median age of 36 years and the national median of 35 years (USCB, 2005).}

#### 2.5.2.4 Housing

{Table 2.5-19 (USCB, 2000c) presents information gathered by the U.S. Census Bureau about the residential and rental housing markets in Calvert County and St. Mary's County in 2000. The ROI had a total of 61,657 housing units in 2000. Of these units, 56,089 were occupied and 5,568 (9.0%) were unoccupied. Of the total number of occupied units in the ROI, 22.1% were occupied by renters. There were significantly more year-around units available than seasonal or occasional units, with 3,348 units available year-around and 2,220 units available seasonally. (USCB, 2000c)

Future housing needs will be determined by population growth, vacancy rates, and persons per household trends. As shown in Table 2.5-20 (MDDP, 2006), the number of single and multifamily residential building permits issued annually in the ROI increased from 1,435 permits in 2001 to 1,909 permits issued in 2004. However, in 2005 the number of approved permits for construction decreased to 1,481, a decrease of 428 permits or 22.4% from 2004.

In addition to the single family housing units in the ROI, rental units include 33 apartment/townhouse complexes (see Table 2.5-21, Apartments, 2007), and 21 hotel, motels, and bed and breakfasts with 1,202 units (see Table 2.5-22) in the two-county ROI. Within the greater roughly 30 mi (48 km) radius, an additional 7 hotels and motels with 571 units are available in Charles County and Prince Georges County. Many of the apartment/townhouse complexes require a minimum of a 6 to 12 month lease. Hotels and motels are the most occupied (80% or more) during the summer season from about April through August, and Mondays through Wednesdays during the business week.

There are no Native American reservations nor any housing reserved for Native Americans in the ROI.}

### 2.5.2.4.1 {Calvert County

As shown in Table 2.5-19 (USCB, 2000d), Calvert County had a total of 27,576 housing units in 2000, and a significantly larger proportion of single family units than the 2005 Maryland state average of 76% (MDDP, 2006). Of the total units, 25,447 were occupied and 2,129 (7.7%) were unoccupied. Of the total number of occupied units in Calvert County, 14.8% were occupied by renters. The unoccupied units were relatively equally comprised of units available year-around and those available only seasonally or occasionally, with 1,125 units available year-around and 1,004 units available seasonally. Of the available housing units in 2000, the vast majority of units had plumbing and kitchen facilities, with the exception of 146 units (USCB, 2000c).

Despite the apparent availability of housing in 2000, discussions with county agency representatives indicate that the current availability of new houses or rental houses might be much more limited than indicated by the census data.

As shown in Table 2.5-20 (MDDP, 2006), the number of single and multifamily residential building permits issued annually in Calvert County decreased over four years, from 928 permits issued in 2002 to 488 permits issued in 2005. From 2004 to 2005 alone, the number of approved permits for construction decreased from 525 in 2004 to 488 in 2005, a decrease of 37 permits or 7.0%. No multi-family units were approved or built in either year.

Housing prices have significantly increased in Calvert County, nearly quadrupling in value over the past decade. The median value of an owner occupied unit in Calvert County in 2000 was \$169,200 (USCB, 2000c). From 2003 to 2004, prices for residential properties rose 13.7%, with 1,628 units sold at a median price of \$259,900 in 2004. In 2005, the median price of the 1,675 residential units sold in Calvert County was \$325,000, up by 25% from 2004. In 2006, the sale price of many four bedroom houses in the northern half of the county averaged \$800,000. (MLS, 2006).

In 2000, the gross median rent was \$837 per month in Calvert County (USCB, 2000c).

In addition to the single family housing units in the ROI, rental units include 5 apartment/townhouse complexes (see Table 2.5-21, Apartments, 2007), and 8 hotel, motels, and bed and breakfasts with 655 units (see Table 2.5-22) in Calvert County. Many of the apartment/townhouse complexes require a minimum of a 6 to 12 month lease. Hotels and motels are the most occupied (80% or more) during the summer season from about April through August, and Mondays through Wednesdays during the business week.}

### 2.5.2.4.2 {St. Mary's County

As shown in Table 2.5-19 (USCB, 2000c) (USCB, 2006), St. Mary's County had a total of 34,081 housing units in 2000, and a significantly larger proportion of single family units than the 2005 Maryland state average of 76% (MDDP, 2006). Of the total units, 30,642 were occupied and 3,439 (10.1%) were unoccupied. Of the total number of occupied units in St. Mary's County, 28.2% were occupied by renters. There were almost twice as many year-around units available as seasonal or occasional units, with 2,223 units available year-around and 1,216 units available seasonally. Of the available housing units in 2000, the vast majority of units had plumbing and kitchen facilities, with the exception of 432 units (USCB, 2000c).

Despite the apparent availability of housing in 2000, discussions with county agency representatives indicate that the current availability of new houses or rental houses might be more limited than indicated by the census data. They stated that the housing market is not nearly as tight as it was 2 to 3 years ago when the vacancy rates may have been as low as 2% or

3%. Builders were offering a number of incentives to entice purchasing of single-family houses by new home buyers, and two new housing developments were in the process of being completed at the time of discussions with the agency representatives.

As shown in Table 2.5-20 (MDDP, 2006), the number of single and multifamily residential building permits issued annually in St. Mary's County increased from 2001 through 2004, from 549 permits issued in 2001 to 1,384 permits issued in 2004. This was followed by a decrease in the number of permits issued from 2004 to 2005. In 2004, there were 1,384 permits issued for construction, of which 1,096 or 79.2% were single family units. In 2005, St. Mary's County issued 993 permits for construction, of which 963 permits or 97.0% were for single family construction. The decrease of 391 approved permits in 2005 represents a drop of 28.3% from 2004. (MDDP, 2006).

The median value of an owner occupied unit in St. Mary's County in 2000 was \$150,000 (USCB, 2000c). From 2003 to 2004, prices for residential properties rose 26.3%, with 1,446 units sold at a median price of \$237,950 of 2004. In 2005, the median price of the 1,731 units sold in St. Mary's County was \$295,000, up 24% from the 2004. (MLS, 2006).

In St. Mary's County, the gross median rent was \$719 per month in 2000 (USCB, 2000c).

In addition to the single family housing units in the ROI, rental units include 28 apartment/townhouse complexes (see Table 2.5-21, Apartments, 2007), and 16 hotel, motels, and bed and breakfasts with 737 units (see Table 2.5-22) in St. Mary's County. High occupancy periods are similar to those for Calvert County.}

### **2.5.2.5 Local Educational System**

{This section describes the school district facilities and enrollment levels in the two counties comprising the ROI. The two school districts in the ROI have a total of 51 public schools with 33,983 students enrolled (see Table 2.5-23; CCSD, 2007; SMCPs, 2007; and GS, 2007). There are also a total of 33 private schools in the ROI, with 3,814 students enrolled (see Table 2.5-24) (GS, 2007).}

#### **2.5.2.5.1 {Calvert County Public and Private Schools**

The Calvert County Public School System, which includes all of Calvert County, includes 4 high schools, 6 middle schools, 12 elementary schools, 1 school that teaches pre-kindergarten through 12<sup>th</sup> grade, 1 Career and Technology Center, 1 Alternative School, and 1 Special Education Center (see Table 2.5-23, which has only 4 students per FTE teacher) (CCSD, 2007 and GS, 2007). The Calvert County school system opened a new high school, Huntington High School, in fiscal year 2005 and is now constructing a new elementary school. The school system employed a total of 2,209 people in the 2003-2004 school year, of which 1,256 were teachers. Current student/teacher ratios range from 15 to 20 students per full-time equivalent (FTE) teacher (with the exception of the Calvert Country School) (CCSD, 2007).

In 2006, there were 17,431 students (GS, 2007) enrolled in Calvert County public schools (Pre-K to Grade 12), which reflects an aggregate 14.3% increase over a five year period (CCPS, 2005). The enrollment is expected to be 18,260 primary and secondary students in public schools in 2015, an aggregate increase of 4.8%. Racial minorities make up approximately 15% of the student population. In comparison, schools in the state of Maryland are expected to experience an average increase of 1.8% in enrollment during the same period.



Approximately 13% of the student body receives free and reduced priced meals and approximately 18% are enrolled as Title 1 students. Approximately 18% of the students are in Special Education classes. A very small percent of the student body (0.7%) are classified as English as a second language (a Limited English proficient person, or LEP) persons.

The 2005-2006 fiscal year operating budget was \$163,596,308, an 8.5% increase over the 2004-2005 fiscal year operating budget (CCPS, 2005). The Calvert County Public School Master Plan states that the annual percentage increase in student enrollment generally declined from 2000 to 2005: from 3.46% in 2000 to 2.53% in 2001, 3.07% in 2002, 3.09% in 2003, 1.64% in 2004, and 0.12% in 2005.

The school district reports that essentially all schools, and the classrooms within them, are operating at capacity. As additional facilities are needed, the school will add modular classroom units. Despite operating at facility capacity, the system has indicated that they are not in need of additional equipment for their classrooms, and the greatest needs that they are now addressing include ongoing growth in the special services portion of the educational system (i.e., special education and other specialized teaching programs).

In addition to the public school system, Calvert County has eight private schools with 1,051 students. Current student/teacher ratios range from 6 to 18 students per FTE teacher (see Table 2.5-24, GS, 2007).}

#### **2.5.2.5.2     {St. Mary's County Public and Private Schools}**

The St. Mary's County Public School System has 3 high schools, 1 middle/high school, 4 middle schools, 16 elementary schools, and 1 career and technology center (see Table 2.5-23, SMCPS, 2007, and GS, 2007). The district is now building a new elementary school, and feels that a new middle school and a high school would have to be built by about 2012. Current student/teacher ratios range from 11 to 21 students per FTE teacher (with the exception of the St. Mary's County Alternative Learning School, which has 5 students per FTE teacher) (CCSD, 2007).

There were 16,552 students enrolled in St. Mary's County public schools in 2006 (GS, 2007). These enrollment levels are reported to have been relatively stable over the past few years. That number is expected to grow by 8.3%, to 17,930 students by 2015 (MDDE, 2006a). The State of Maryland Agency for Public School Construction reported that St. Mary's County public elementary schools had a 98.6% utilization for the 2005-2006 school year, the middle schools had a 95.4% utilization rate, and the high schools had a utilization rate of 102.1% (MDDE, 2006). Because enrollments have been relatively stable, the school district is focusing its efforts on improving performance levels (i.e., test scores) of the students.

The St. Mary's County Public School System's FY 2006 budget was \$147,340,296. The St. Mary's County Public School district may experience a significant reduction in operating funds if a proposed initiative to reduce funds for Impact Aid to Local Educational Agencies (LEAs) with children associated with federal facilities but not living on the facilities is passed. The mid-Atlantic Naval District has approved plans to move all families currently living on the Patuxent Naval Air Station to off-base, contract-owned, and contractor-operated housing. If the initiative is passed, the district will lose all impact dollars when the Navy housing plan is completed (MDDE, 2006).

In addition to the public school system, St. Mary's County has 25 private schools with 2,763 students. Current student/teacher ratios range from 8 to 31 students per FTE teacher. (see Table 2.5-24, GS, 2007)}

### 2.5.2.5.3 Colleges and Higher Education

{There are two colleges in the ROI, St. Mary's College of Maryland and The College of Southern Maryland. St. Mary's College of Maryland is located in St. Mary's City (which is not an incorporated city, town or a Census Designated Place [CDP]). It is a public, baccalaureate granting institution and had 1,908 students in the 2005-2006 school year. The College of Southern Maryland has campuses in eastern Leonardtown (St. Mary's County), western Prince Frederick (Calvert County), and in La Plata and Waldorf (Charles County). The College of Southern Maryland is a public institution awarding Associates degrees and Certificates/Diplomas. It had a student enrollment of 4,961 people in the 2005-2006 school year (CHE, 2006)}.

### 2.5.2.6 Area Recreational Opportunities

{Many of the recreational opportunities available in Calvert County and St. Mary's County involve the Chesapeake Bay and the Patuxent River, or open green spaces. Chesapeake Bay area beaches provide opportunities to swim and fish from shore. Boat ramp/launch sites and marinas provide many private opportunities for power boating, sailing, fishing from boats, crabbing, canoeing, and kayaking. Charter services provide additional commercial fishing opportunities in the area. (CCMP, 2004)

Additional on-land recreational opportunities include biking, golf, and fossil hunting (CCMP, 2004). Utilization numbers and capacities for these types of venues are not recorded by the applicable agencies or departments because the utilization numbers are difficult to capture and not generally used in facilities planning activities. }

#### 2.5.2.6.1 {Calvert County

The relative value of tourism to the state of Maryland is summarized in MDL (2006). Between 2001 and 2004, the number of tourism related jobs increased from 215,073 to 230,537. The payroll value in those same years increased from \$3.5 billion to \$4.1 billion. The combined value encompassed various employment categories including scenic transportation, travel services, arts and sports, accommodations and food services. Of these, food services represented the largest value with payroll of \$2.3 billion in 2004. Southern Maryland which includes Calvert, Charles and St. Mary's county has 11,122 tourism related jobs in 2004, representing total wages of \$134.4 million.

The relative value of tourism in Calvert County has been summarized in CCM (2006). This report provides information on various economic parameters including labor force, employment, agriculture, income, tax base, education and tourism (pg. 16). Tourist expenditures in Calvert County during 2003, 2004, and 2005 were approximately \$59.5M, \$68.1M and \$74.9M, respectively. Expenditures within the recreational boating industry in those same years were \$38.7M, \$36.7M and \$33.8M. Tourism related county revenues derive from taxes on personnel income, admissions, amusements, hotels, restaurants and gasoline among others. Leisure and hospitality occupations accounted for 2,963 and 2,849 jobs in 2004 and 2005, respectively, representing approximately 17.4% of private employment. Average weekly wages in the leisure and hospitality sector during 2004 and 2005 were \$227 and \$252, respectively. In St. Mary's County, leisure and hospitality accounted for approximately 3,293 jobs in 2006 representing 8.6% of the total employment in that County.

Calvert County has approximately 360 acres (146 hectares) of county or municipal parkland. The County has ten county-operated parks with a variety of amenities. It also has 20 baseball fields, 6 football fields, 6 basketball courts, and 10 tennis courts (CCCAFR, 2005). Other area recreational opportunities include bird watching, lighthouses, an estuarine research center,

boardwalks, a rail museum, and the Arthur Storer Planetarium. (CCMP, 2004) Calvert County has several public and private golf courses, including Chesapeake Hills in Lusby and Twin Shields in Dunkirk.

Major park facilities located within the county include Calvert Cliffs State Park located south of the CCNPP site and the Flag Ponds Nature Park. Calvert Cliffs State Park is comprised of about 3,030 acres (1,226 hectares) of land, of which about 90% is forested, and 1.3 mi (2 km) of shoreline on the Chesapeake Bay. Common recreational activities include wildlife viewing and bird watching, swimming, fishing, hunting, fossil hunting, hiking, picnicking, and use of the playground facilities. The park has 1,079 acres (432 hectares) of designated wildlands area. Hunting of upland game (e.g., squirrels and rabbits), turkey, and deer is allowed on 550 acres (223 hectares) of the park. The park also has 6 marked and maintained hiking trails covering 13 miles (20 km), a 1 acre (0.4 hectare) stocked fishing pond next to the parking lot, 6 youth camp sites available from March 30 through October 29, and parking spaces for more than 100 cars.

Flag Ponds Nature Park is comprised of 327 acres (132 hectares) and 1 mi (1.6 km) of shoreline on the Chesapeake Bay. Common recreational activities include wildlife viewing and bird watching, swimming, fishing, hiking, and picnicking. It has over 2 mi (3 km) of hiking trails and 2 freshwater ponds.

As shown in Table 2.5-25 (DB, 2007 and CCDED, 2007b), Calvert County has four boat ramps/launch sites, two of them only provide access for canoes and kayaks. There are also 15 marinas in which to store, rent, or charter boats, with a total of 2,422 slips (see Table 2.5-26, CC, 2007 and CCDED, 2007b). Numerous opportunities also exist to charter fishing and sightseeing boats within the county. As shown in Table 2.5-27 (CCDED, 2007b), there are seven charter boat associations with more than 100 boats available to charter (individual boats/charters are not listed because of the extensive number of them in the county).

Two campgrounds, although each is a large facility, provide limited overall camping opportunities in the county (see Table 2.5-28, GC, 2007 and CCDED, 2007a). Breezy Point Beach & Campground has 60 camp spaces and Patuxent Camp Sites has 75 campsites. (GC, 2007 and CCDED, 2007a)

The Calvert County Comprehensive Plan and the Land and Recreation Plan recommend the creation of greenways throughout the county (MDDNR, undated). Calvert County is also exploring opportunities to create water access points to the Chesapeake Bay. The Calvert County Comprehensive Plan calls for town centers to serve as focal points for community-based recreation and for development of a network of county-wide parks featuring unique natural, cultural, and historical sites (CCMP, 2004).}

#### **2.5.2.6.2 {St. Mary's County}**

St. Mary's County has 4 state parks, 12 community parks, 7 neighborhood parks, and 15 school recreational parks. St. Mary's County also maintains 3,983 acres (1,612 hectares) of resource lands, some of which are used for recreation and environmental education. St. Mary's County has 400 mi (640 km) of shoreline (MDDBED, 2007) and approximately 1,500 acres (610 hectares) of public county or municipal parkland. There are two 18-hole golf courses located in the county, including the Wicomico Shores Golf Course owned by St. Mary's County and the privately owned Breton Bay Golf and Country Club.

The four state park facilities located within the county include St. Mary's River State Park, Point Lookout State Park, St. Clements Island State Park, and Greenwell State Park. St. Mary's River State Park is located southwest of the CCNPP site and south of California. The park is comprised

of 2,000 acres (810 hectares) of land, a 250 acre (101 hectares) fishing lake, and 9 miles (15 km) mountain biking and hiking trails.

Point Lookout State Park has 143 wooded campsites (26 with full hook-ups and 27 with electricity), one campsite for youth groups, and the Civil War Museum/Nature Center. Water-based recreation facilities and activities include a beach area (with grills, picnic tables, a playground, showers, and restrooms) with lifeguard supervised swimming, a boat launch facility and fish-cleaning station, boat rentals and supplies available from the camp store, three fishing areas, and a 710 ft (216 m) pier.

St. Clements Island State Park is a 40 acre (16 hectare) island with hiking, picnicking, scenic views of the Potomac River, a museum highlighting island history, and pier and docking facilities. A seasonal water taxi provides access only during the weekends from May through September.

Greenwell State Park is comprised of 600 acres (243 hectares) of land with 10 miles (16 km) of trails, 2 miles (3.2 km) of waterfront along the Patuxent River, a 50 ft (80 m) pier, kayak/canoe launch sites, beach and picnicking areas, a pavilion, Knott Lodge (an overnight facility for up to 16 guests), and historic Rosedale Manor. Horseback riding programs, summer camps and special events are additional recreational opportunities available at the park.

As shown in Table 2.5-25 (DB, 2007 and SMCDT, 2007), St. Mary's County has 18 boat ramps/launch sites, two of them only provide access for canoes and kayaks and another five only have piers. There are also 21 marinas in which to store, rent, or charter boats (see Table 2.5-26, SMCTT, 2007 and SMCDT, 2007). Numerous opportunities also exist to charter fishing and sightseeing boats within the county. As shown in Table 2.5-27 (SMCDT, 2007), there are an estimated 35 charter boat services in the county.

Significantly more camping facilities and opportunities are available in St. Mary's County than Calvert County. The county has six campgrounds/RV parks with a total of over 630 spaces (see Table 2.5-28, GC, 2007 and SMCDT, 2007).

St. Mary's County abounds in sites and structures of historic interest; 27 are listed on the National Register of Historic Places and 666 on the Maryland Inventory of Historic Sites (SMCMP, 2003). Calvert County and St. Mary's County are part of a three county "Southern Maryland Heritage Area." Over 63 sites and activities in St. Mary's County are identified in the Heritage Plan as historic, cultural, or recreational centers. The most important fixed visitor destinations are Point Lookout State Park, Historic St. Mary's City, and the Sotterley Mansion. The air exposition at the Naval Air Station each spring, the Blessing of the Fleet, the Crab Festival, and the Oyster Festival each fall, attracts large numbers of people (SMCMP, 2003).

The St. Mary's Comprehensive Plan and the Land Preservation and Recreation Plan recommend the creation of greenways throughout the county (SM, 2003). St. Mary's County practices managed growth and land preservation via tools such as the Comprehensive Zoning Ordinance and the Adequate Public Facilities guidelines. Within St. Mary County, 230,799 acres (93,404 hectares) or 79.1%, are devoted to agriculture, forests, extraction/barren, or wetlands (SMC, 2005).}

## 2.5.2.7 Region Tax Structure and Distribution

### 2.5.2.7.1 {State of Maryland

Statewide and county administrative and taxing organizations that may be directly affected by the proposed action include the state of Maryland, Calvert County, and St. Mary's County. The Maryland Department of Natural Resources evaluated the tax revenue generation impacts of power plants in the state (MDNR, 2006). The department found that power plants are required to pay property taxes like all other businesses in Maryland and are subjected to two tax rates, a state utility property tax and a county utility property tax (covering real and personal property). Non-utility generators are subject to three tax rates, state real property taxes, county real property taxes, and county personal property taxes. Real property refers to the land and buildings at a site, whereas personal property refers to equipment and components used at a site. Tax assessments are allocated to the jurisdictions where the generation facility is located using a cost-based estimate of value, to which the county tax rates are applied. Power plants receive a 50 percent exemption for personal property (i.e., machinery or equipment) that is used to generate electricity for sale, and all personal property is subjected to a minimum assessment of 25 percent of the original cost (MDNR, 2006).

In 2006, the Maryland sales and use tax rate was 5 percent on all taxable sales, other than certain vehicle rentals and sales of mobile homes. Most sales of food by substantial grocery or market businesses are not subjected to the sales tax. Other exemptions included medicine, energy for residential use, manufacturing machinery and equipment, and certain agricultural equipment and supplies (MD, 2007).

Maryland has the Maryland Agricultural Land Preservation Program, which provides tax credits for preserved farm land (CCMP, 2004). }

### 2.5.2.7.2 {Calvert County

Calvert County is the main beneficiary of the CCNPP tax base, including county property taxes, county income taxes, and portions of the state sales tax revenues. Taxing districts that may be directly affected by the proposed action include Calvert County and the Calvert County Public School System. As shown in Table 2.5-29, the Calvert County effective property tax rate is 3.1220% per \$100 of property valuation, comprised of a real property tax rate of 0.8920%, a personal property tax rate of 2.2300%, and a utility property tax rate of 22.300%. (MDNR, 2006) The CCNPP site had a Calvert County assessed property value of over \$675 million in fiscal year 2005. In addition, county residents in general and those working for CCNPP specifically pay personal and real property taxes to the county for their residences.

Calvert County had a 2.80 percent income tax rate in 2006 and also receives a portion of the Maryland state sales and use tax rate of 5 percent. The high tech nature of the jobs at CCNPP results in relatively high salaries to workers, which in turn leads to higher than average disposable income. This income is available for purchases of goods and services, which in turn create jobs and generate sales tax and other user fee revenues for the county and for the state. However, many other ROI area workers (other than CCNPP employees) commute to worksites and employers outside of the county and the ROI. These daily commutes represent an out-migration of potential sales and use tax revenues as residents make some purchases (e.g., gasoline and meals for example) in counties other than those in which the worker resides. (SMCMP, 2003)

Table 2.5-30 (CCBCC, 2005) presents information about the actual general revenues, taxes, and expenditures for Calvert County for FY 2005. Total revenues were about \$174.1 million, with

45.3% (\$78.8) obtained from property taxes, 31.2% (\$54.4) obtained from income taxes, 8.3% (\$14.5 million) obtained from other local taxes, and the remainder originating from other sources. Total expenditures were about \$166.2 million, including \$83.6 million for county operations, \$80.9 million for the Board of Education, and \$1.7 million for transfers out to other organizations. The greatest expenditures within the operating portion of the budget are allocated to the sheriff and corrections (14.4% and \$12.0 million), pensions and insurance (12.4% and \$10.4 million), debt and other miscellaneous expenses (12.2% and \$10.2 million), capital projects (10.5% and \$.8 million), and public works and transportation (9.1% and \$7.6 million).

Table 2.5-31 (CC, 2007) presents information about historical total revenues, property tax revenues, and the total assessed value of property in Calvert County from FY 2000 through 2005.}

### **2.5.2.7.3 {St. Mary's County}**

St. Mary's County had a 0.872 percent property tax rate in 2006 and a 3.00 percent income tax rate. Table 2.5-30 (SMCBCC, 2006) presents information about the actual general revenues, taxes, and expenditures for St. Mary's County for FY 2005. Total revenues were about \$145.2 million, with 40.2% (\$58.3) obtained from property taxes, 37.3% (\$54.1) obtained from income taxes, 9.2% (\$13.4 million) obtained from other local taxes, and the remainder originating from other sources. Total expenditures were about \$131.1 million, including \$70.8 million for county operations, \$58.9 million for the Board of Education, and \$1.4 million for transfers out to other organizations. The greatest expenditures within the operating portion of the budget are allocated to the sheriff and corrections (25.1% and \$17.8 million), public works and transportation (19.2% and \$13.6 million), and debt and other miscellaneous expenses (17.1% and \$12.1). }

### **2.5.2.8 Local Land Use Plans**

{The State of Maryland Legislature has mandated that each county and municipality adopt a comprehensive land use plan, per the Economic Growth, Resource Protection, and Planning Act, including Smart Growth initiatives. In compliance with this mandate, Calvert County and St. Mary's County have adopted land use plans that guide development within their respective counties.

The Maryland Master Facilities Plan for schools (MDDE, 2006) coupled with the land use plans effectively limit the development of new housing, without the construction of accompanying new infrastructure which would strain community services. Development is allowed, but the developer, rather than the county taxpayer, bears the costs.}

#### **2.5.2.8.1 {Calvert County}**

Calvert County has a total area of 345 sq miles (894 sq km); 215 sq miles (557 sq km) of land and 130 sq miles (337 sq km) or 37.7% of water. St. Mary's County borders Calvert County to the south, the Chesapeake Bay is to the east, and Anne Arundel County is to the north.

The Calvert County Comprehensive Plan (as amended), adopted in 2004 strongly encourages residential and light industrial growth in corridors where adequate infrastructure is in place. In addition, the County has adopted a plan to charge developers whose activities generate additional demands on the existing infrastructure. The County has established a waiting list for commercial land developers desirous of constructing new residential subdivisions (of greater than five lots).}

### **2.5.2.8.2 {St. Mary's County}**

St. Mary's County is 611 sq mi (1,582 sq km), of which 284 sq miles (736 sq km), or 46.5% is water. The county is bordered by the Patuxent River, the Chesapeake Bay, the Potomac River, and the Wicomico River. (SMCMP, 2003).

St. Mary's County has a comprehensive land use plan (SM, 2003) that addresses current and future land use issues, water supply, traffic congestion, sewerage, and solid waste management. The mission of the plan is to "preserve the county's environment, heritage, and rural character ..." (SM, 2003). The plan calls for clustered growth by directing the majority of new high-density residential and non-residential development to designated development districts and existing population centers. The plan calls for public facilities and infrastructure to be made available in these areas, as a way to control where growth is to occur. The citizens of St. Mary's County are concerned about the loss of economic vitality of some of the town centers, particularly Leonardtown (SM, 2003).}

### **2.5.2.9 Area Public Facilities and Social Services**

Public services consist of schools and colleges or universities; social services; water and sewer services; police protection, fire suppression, and emergency medical service (public safety); and hospitals and doctors. In both counties, most of these services are located near economic centers.

Schools and post-secondary education are discussed in Section 2.5.2.5.

#### **2.5.2.9.1 Social Services**

{The Calvert County Department of Health and Human Services provides for and/or coordinates social and other services for the county. Under its guidance are the Department of Social Services, Aging Services, Calvert Alliance Against Substance Abuse, Substance Abuse program, Calvert County Health Department, Calvert County Memorial Hospital, Calvert Hospice, Calvert County Family Network, the Southern Maryland Chapter of the Red Cross, the Department of Community Resources, and the Maryland Cooperation Extension office,

The St Mary's County Department of Social Services provides for and/or coordinates social and other services for the county, along with the St. Mary's County Public Health Department. Social service programs include Emergency Food Providers, Family to Family Foster Care in Southern Maryland, the Director of Emergency & Transitional Housing Programs, and the Child Care Administration Regional Office for St. Mary's County.}

#### **2.5.2.9.2 Water and Sewer Services**

##### **2.5.2.9.2.1 {Calvert County}**

Table 2.5-32 lists the public water districts/systems in Calvert County (CCWS, 2007). Calvert County had 22 water treatment plants and 14 storage tanks serving 4,251 accounts and provided 459,385,053 gal (1.7 million cubic meters) of treated water in FY 2005 (CCCAFR, 2005). As can be seen in Table 2.5-32, the water districts have more than enough excess capacity to accept more hookups, ranging from a low of 4.7% utilization of the Summit/Highlands Water district's water treatment and delivery capacity to a high of 70.0% for the White Sands Water district. Residents who are not provided service by a public water district/system use private wells as sources of water and rely upon the area groundwater aquifers. Calvert County is served by seven aquifers: Patapsco, Aquia, Piney Point-Nanjemoy, Magothy, Brandywine, Choptank-St. Mary's, and the Brightseat. Ground water resources have been and are expected to remain

adequate to meet the needs of a growing population in Calvert County, according to the comprehensive water and sewage plan (CCMP, 2004).

Table 2.5-33 lists the public sewer districts/systems in Calvert County (CCWS, 2007). Calvert County has 7 sewage treatment plants and 27 sewer pumping stations serving 2,590 accounts and providing 555,799,835 gal (2.1 million cubic meters) of treated sewerage in FY 2005 (CCCAFR, 2005). As can be seen in Table 2.5-33, the sewer districts have more than enough excess capacity to accept more hookups, ranging from a low of 33.3% utilization of the Industrial Park Water and Sewer district's water treatment and delivery capacity to a high of 57.1% for the Solomons Water and Sewer district. Residents who are not serviced by a public sewer district/system rely upon private septic tanks and drain fields for wastewater treatment.}

#### **2.5.2.9.2.2 {St. Mary's County**

St. Mary's water and sewer services are provided by the St. Mary's County Metropolitan Commission (SMCMC), created in 1957 by the State Legislature as a quasi-governmental, non-profit agency to supply water and sewer services to St. Mary's County. Table 2.5-32 lists the individual water systems in St. Mary's County (SMCMC, 2007). The Commission operates 27 water systems with 12.5 mgd pumping capacity (47.3 mld) and a 5.4 mgd (20.4 mld) average daily flow. The systems serve 41,000 residents from 72 wells and 54 pumping stations (SMMC, 2006). As can be seen in Table 2.5-32, the water districts have more than enough excess capacity to accept more hookups, ranging from a low of 2.7% utilization of the Hearts Desire water treatment and delivery capacity to a high of 66.0% for the Lexington Park system. Residents who are not provided service by the SMCMC water system use private wells as sources of water and rely upon the area groundwater aquifers. St. Mary's County is served by five aquifers: the Patapsco, Aquia, Piney Point, Magothy, and Mattaponi. Only the Aquia aquifer serves the entire county, the remaining aquifers are found in limited areas within the county (CCMP, 2004). Ground water resources have been and are expected to remain adequate to meet the needs of a growing population, according to the comprehensive water and sewage plan (CCMP, 2004).

Table 2.5-2-23-33 lists the SMCMC's individual sewer systems in Calvert County (SMCMC, 2007). The four wastewater treatment plants in the county are located in Leonardtown and Pine Hill Run, which serve the Leonardtown and Lexington Park district, respectively, and in St. Clement's Shores and Wicomico Shores which serve those neighborhood conservation districts (CCMP, 2004). These four treatment systems have 53 waste water pumping stations with a capacity of 6.3 mgd (23.8 mld) and an average daily flow of 5.0 mgd (19.0 mld), serving approximately 36,000 people (SMMC, 2006). As can be seen in Table 2.5-33, the individual public sewer systems are operating closer to their capacities than the Calvert County systems. System utilization ranges from a low of 56.7% for the Pine Hill Run system to a high of 85.0% for the Wicomico Shores system. Residents who are not serviced by one of public sewer systems rely upon private septic tanks and drain fields for wastewater treatment.}

#### **2.5.2.9.3 Police and Sheriff Services**

{The two-county ROI receives law enforcement services from the State of Maryland Department of State Police, the Calvert County Sheriff's Office, and the St. Mary's County Sheriff's Department.}

##### **2.5.2.9.3.1 {Calvert County**

Calvert County has 1 police station, 135 uniformed officers, 25 civilian personnel, and 135 police vehicles. The department has three, 9.5 hour shifts that patrol officers work. Additional law enforcement resources are available from the City of Baltimore at the request of the



Sheriff's Department as are the resources of the Sheriff Department in St. Mary's County (CCCAFR, 2005). Table 2.5-34 (CCBCC, 2005) (MDSP, 2007) summarizes the staff levels and budgets for law enforcement departments and detention facilities for the state of Maryland, Calvert County, and St. Mary's County. In FY 2005, the Calvert County Sheriff's Office had a budget of \$6.9 million. The county's detention facility had a budget of \$4.5 million, 64.5 FTE staff, and had an average daily population of 222 inmates (CCBCC, 2005). The facility has a capacity of 750 inmates and reaches capacity during the summer months, with winter populations being lower. The department has identified the need for additional funding to support the addition of more staff, more office space, increased detention facility capacities, and additional equipment.

The CCNPP site maintains its own security within the site property boundaries and will request assistance from police and sheriff departments, as needed, in accordance with the emergency and security plan.}

#### **2.5.2.9.3.2 {St. Mary's County}**

The St. Mary's County Sheriff Department, is one of the oldest in the nation. It has 117 authorized law enforcement officers (SMC, 2005). The St. Mary's Department of Public Safety reported 11,632 calls for service in 2005, a modest drop of 2.4% from the 11,910 calls in 2004 (SMDPS, 2005). As shown in Table 2.5-34 (SMCBCC, 2006) St. Mary's County Sheriff's Department had a FY2005 budget of \$11.8 million. The county's detention facility had a budget of \$6.0 million and it had an average daily population of 292 inmates. The department has identified the need for additional funding to support the addition of more staff.}

#### **2.5.2.9.4 Fire Suppression Services**

##### **2.5.2.9.4.1 {Calvert County}**

Calvert County has 7 fire stations and 870 volunteer firefighters (CCCAFR, 2005). The Southern Maryland Volunteer Fireman's Association lists 7 volunteer fire departments in Calvert County, 6 volunteer rescue squads, and 1 dive rescue team (SMVFA, 2004). The number of stations and an indication of the general distribution of volunteers (see the note in the table regarding the total number of staff) are provided in Table 2.5-35 (FD, 2007 and CCDFB, 2005). The department has 12 engines/attack pumpers, 3 ladder trucks, 5 tankers, and a wide assortment of other vehicles. The engines/attack pumpers carry 750 to 1,000 gals of water each and are typically about 15 years old. Most tankers can carry about 3,000 gals of water each. The department has identified a current need for more support personnel for fire and rescue services, and additional staff in the Emergency Management and the Public Safety Director's Office. The county also has identified a current need for additional vehicles and equipment.

Fire prevention and response on the CCNPP site is handled by an onsite force with backup resources available from both Fire Departments in Calvert County and St. Mary's County. The CCNPP onsite force maintains an emergency response team, including a fire brigade, to respond to fires within the facilities' buildings and structures.}

##### **2.5.2.9.4.2 {St. Mary's County}**

The Southern Maryland Volunteer Fireman's Association identifies 9 volunteer fire departments in St. Mary's County and 7 volunteer rescue squads (SMVFA, 2004). These departments were staffed by more than 730 volunteer firefighters and 150 other support staff (FD, 2007).}

### **2.5.2.9.5 Emergency Medical Services**

{Calvert County and St. Mary's County are part of Region V of the Maryland Emergency Medical Services (EMS) System. In most cases their EMS services are provided from the same stations and by most of the same volunteers that staff the fire stations. The Maryland State Police provide MEDVAC services to both counties in emergency evacuation situations.

The 2005-2006 Maryland Institute for Emergency Medical Services Systems Annual Reports noted that Region V made bioterrorism and weapons of mass destruction planning a major focal point of effort (MIEMSS, 2006).

#### **2.5.2.9.5.1 Calvert County**

In Calvert County certified EMS volunteers provide rescue and emergency services throughout the county. The fire/EMS services have 500 volunteer emergency medical technicians (EMTs) that provide services throughout the county. Calls for assistance are received by a central dispatch system and units are dispatched by that system. Table 2.5-36 (MIEMSS, 2006) presents information about EMS responses to calls for FY 2005. Calvert County responded to 132 EMS events that involved 175 patients.

The Calvert County Sheriff has the ability to draw upon surrounding counties and metropolitan areas to assist his staff in the event there was a simultaneous emergency event at CCNPP, as well as offsite evacuations near the plant.

#### **2.5.2.9.5.2 St. Mary's County**

As with Calvert County, St. Mary's County also has certified EMS volunteers that provide rescue and emergency services throughout the county. Calls for assistance also are received by a central dispatch system and units are dispatched by that system. As shown in Table 2.5-36, in FY 2005 St. Mary's County responded to 147 EMS events that involved 119 patients.}

### **2.5.2.9.6 Hospitals and Doctors**

#### **{50-Mi (80 km) Comparative Geographic Area**

In 2003, the U.S. Census Bureau determined that the Washington DC MSA had 22,334 doctors, or 440 physicians for every 100,000 persons. There also were 39 community hospitals with 9,342 beds, or 184 beds for every 100,000 persons in the MSA (USCB, 2006).

There are two hospitals in the ROI: Calvert Memorial Hospital in Prince Frederick and St. Mary's Hospital in Leonardtown. These facilities and other medical services are described below.}

#### **2.5.2.9.6.1 {Calvert County**

Calvert Memorial Hospital (CMH) is a nongovernmental, general medical and surgical, not-for-profit hospital with Joint Commission on Accreditation of Healthcare Organizations (JCAHO) accreditation. (AHA, 2006). The facility has 120 licensed beds, has a 138 bed capacity (they are not currently using all available spaces), and has a surge capacity of 157 beds in the cases of large-scale emergencies. There were 8,201 admissions in 2006 (AHA, 2006) and now have an average of 76 beds used each day.

The emergency department of CMH has 19 emergency beds and 5 fast-track (i.e., minor injuries/illness) beds, and sees about 100 patients each day. The surge capacity of the emergency department is 38 emergency beds and 10 fast-track beds. CMH also has a 10-bed intensive care unit that can be surged to 20 beds in an emergency. Finally, in the event of a

large-scale emergency, CMH could also use 16 beds in the Same Day Surgery area, 6 treatment chairs in the Infusion Therapy Center, 5 beds in the Outpatient Department, and 4 beds in the Pain Management Center.

The hospital currently has a decontamination area capable of treating 10 patients per hour. It also has a portable decontamination unit onsite that can handle 50 patients per hour. The hospital has 1,065 employees and 289 members of the medical staff. The employees include 38 administrators, 341 nurses, 141 professionals, 184 technical staff, 184 clerical staff, and 177 service staff. The medical staff includes 157 active medical staff, 73 consulting physicians, 2 honorary physicians, 30 allied health professionals, and 27 telemedicine physicians.

The hospital will complete a \$33 million expansion in fall 2007 that includes a new 35-bed emergency department, 10-bed intensive care unit, an expanded laboratory, 16 additional monitored beds, and a new outpatient concourse. The expansion will also include a new 3-stage internal decontamination center capable of treating 50 patients per hour, increasing the total decontamination capabilities to 110 patients per hour from all of the permanent and portable decontamination facilities.

In the summer of 2007, CMH will also begin construction of a 75,000 sf medical office building, to be located adjacent to the hospital. This expansion will provide additional physicians' offices, physical therapy, and expanded outpatient imaging services. Construction of this facility is to be completed by fall 2008. Both expansion projects are anticipated to meet the short and intermediate future needs of the hospital.

In addition to the primary facilities in Prince Frederick, CMH also has an urgent care center in Dunkirk, another one in Solomons, and a community health center in North Beach that provide primary care services. Each of these facilities has excess capacity that can be drawn upon when needed.

CMH has a formally established memorandum of understanding (MOU) with St. Mary's Hospital in Leonardtown and Civista Medical Center in La Plata (Charles County) to facilitate the transfer of personnel, equipment, and supplies between the three facilities in the event of an emergency. In addition, CMH and St. Mary's Hospital have identical internal disaster management plans to facilitate their staff's ability to work at each other's facilities, if needed. CMH also has formal MOUs with area tertiary care centers to facilitate the transfer of patients. These tertiary care centers include Washington Hospital Center, University of Maryland, Georgetown University Medical Center, Prince Georges Hospital Center and Washington Adventist Hospital, and Johns Hopkins. CMH also participates in the Maryland Incident Management System (MIMS) and is FEMA certified for a nuclear response.

In the event that an emergency should occur, or that the hospital has to be evacuated, the on-call CMH administrator would coordinate the efforts, in conjunction with the CMH Disaster Management Council. CMH has a comprehensive All Hazards Response Plan that addresses the responsibilities and procedures for such responses, and the facility conducts drills twice a year. CMH is also part of the Maryland Statewide Evacuation Plan and would conduct an evacuation in conjunction with the Maryland Emergency Management Agency. The Maryland state plan stipulates that patients are to be evacuated, by zones, to the 51 hospitals in the state. In the event of an evacuation, ambulatory patients would be transported by bus and other patients would be transported by private/voluntary ambulance services or via air support provided by the Maryland Department of State Police's, Park Service's, and Coast Guard's medivac/rescue helicopters.

Calvert County, in general, also has 156 physicians practicing in 39 specialties throughout the county (AHA, 2006). Calvert County also had 4 Nursing and Personal Care facilities with 481 employees in 2000 (USCB, 2000e). }

#### **2.5.2.9.6.2 {St. Mary's County}**

St. Mary's Hospital had 108 beds in 2007. The number of workers was 1,090 with 252 medical staff. Patient admissions in 2007 totaled 9,254. Emergency care visits totaled 43,222 and outpatient visits totaled 48,040. The average daily census was 76.7 patients (SMH, 2007).

The St. Mary's Hospital emergency acute care facility is open 24 hours a day, seven days a week. Helicopter transport is available to transfer critical patients to other facilities as needed. An advanced MRI/CT technology room is under construction adjacent to the emergency room along with a room to include radiography capability. An Express Care facility is located in Charlotte Hall to treat minor injuries and illnesses.

Partner facilities supporting St. Mary's Hospital under the umbrella of the Chesapeake Potomac Healthcare Alliance include the Chesapeake Potomac Home Health Agency and the Chesapeake Potomac Regional Cancer Center. Therapies of the Cancer Center include external beam radiation, advanced CT simulation, 3 D treatment planning and radiation therapy (SMH 2006;2007).

~~St. Mary's Hospital is a nongovernmental, general medical and surgical, not-for-profit hospital with JCAHO accreditation. St. Mary's Hospital has 113 beds and 732 employees. There were 7,527 admissions in 2006, with an average of 66 beds used each day. (AHA, 2006)~~

In Maryland Emergency Response Region 5, which includes Montgomery, Prince George's, Charles, Calvert, and St. Mary's Counties, there were over 8,000 emergency providers of differing qualifications and over 220 emergency vehicles equipped to transport and/or treat patients, about 20% of the state's transport capacity. During June 2006 to May 2007, Calvert County reported a total of 135 scene oriented emergency cases or about 0.7% of the state's total (17,686). St. Mary's County reported a total of 166 cases or 0.9% of the state's total (MIEMSS, 2008)

St. Mary's County also has 135 physicians practicing in 35 specialties throughout the county (AHA, 2006). St. Mary's County also had 3 Nursing and Personal Care facilities with 473 employees in 2000 (USCB, 2000e).}

### **2.5.2.10 Transportation**

#### **2.5.2.10.1 Airports**

##### **{50-mi (80 km) Comparative Geographic Area}**

There are three major airports in the Baltimore-Washington area including the Baltimore/Washington International Thurgood Marshall Airport (BWI), Reagan National Airport (DCA), and Washington Dulles International Airport (IAD) (MDDBED, 2007).

##### **Two-County Region of Influence**

There are no commercial airports within the ROI. However, the Chesapeake Ranch Airpark is a private airport located 6 mi (10 km) southeast of the CCNPP site. There are no aircraft permanently based here. A busy summer weekend would result in approximately six privately-owned and operated airplanes using the field.

There is also a helipad on the CCNPP site that is used for corporate flights and Medivac flights, if needed.

The St. Mary's County Airport (Captain Duke Airport), located 10 mi (16 km) southwest of the CCNPP site and 4 mi (6 km) northeast of Leonardtown, has approximately 100 single engine planes based at the facility. The Maryland State Police have a rescue helicopter based at the St. Mary's County Airport. The single runway is 4,150 ft x 75 ft (1,265 m x 23 m) (SMDPW, 2006). The airport is currently only available for private planes. However, the St. Mary's Transportation Master Plan Update suggests determining what additional infrastructure would be needed at the airport to ready it for future commuter air service (SMDPW, 2006) (SMDPW, 2007) (MDDBED, 2007).

The Patuxent River Naval Air Station, in St. Mary's County, is 11 mi (18 km) south of the CCNPP site. Patuxent River Naval Air Station operates naval aircraft in test and development missions.}

### **2.5.2.10.2 Public Transportation (Bus)**

#### **{50-Mi (80 km) Comparative Geographic Area**

A commuter bus service is operated by Calvert County as an alternative mode of transportation for those individuals living in the county, but working in the Washington D.C. area (CCRG, 2006).

St. Mary's County provides daily mass transit services to the Washington D.C. area for commuters. The commuter service to the Washington D.C. area is well utilized and ridership has been increasing over the years (SMCMP, 2003).

#### **Two-County Region of Influence**

Calvert County has 17 passenger buses on 7 service routes that cover 475,635 mi (765,297 km). There were approximately 113,354 passengers for FY 2005 (CCCAFR, 2005). Calvert County's Public Transportation Division operates a deviated fixed route system and a demand route system to meet the transportation needs of the general public, the elderly, and persons with disabilities.

St. Mary's Transit System operates daily, including evenings and on the weekends. Ridership has increased from approximately 54,395 passengers annually in FY 2000 to over 300,000 passengers annually in FY 2006 (SMTS, 2006). Ridership on the St. Mary's Transit System has increased but excess capacity exists (SMCMP, 2003).}

### **2.5.2.10.3 Roads and Highways**

{There are no interstate highways in Calvert County or St. Mary's County. Transportation routes, both at the state maintained level and at the county maintained level are limited in both counties. The major highway in the area is Maryland state highway (MD) 2/4, which passes the CCNPP site on a north-south axis towards Solomon. MD 2/4 has two lanes going in each direction, with selected left and right hand turn lanes and some traffic lights at busy intersections. Access into Calvert County is also available via MD 231. This is a two lane road with bridge access to southern Charles County.

Table 2.5-37 shows the peak hour traffic volumes at Calvert Cliffs Parkway and the CCNPP site access road, MD 2/4 within 4 mi (6.4 km) of the site access road in the north and south direction.

Calvert County is surrounded by water except at the north end where it meets Anne Arundel County, Maryland. This somewhat limits the number of access points into the county. Calvert

County is only 30 mi (48 km) long north to south, and 5 to 9 mi (8 to 14 km) wide. Calvert County owns 435 mi (700 km) of streets (CCCAFR, 2005). The Calvert County Comprehensive Plan has identified the need to reconstruct some roads. However, there is no new highway construction planned in the area by either the State of Maryland or Calvert County. Calvert County is connected to St. Mary's County on the south with a bridge at Solomon's Island.

St. Mary's County has adopted a county-wide Transportation Plan that is fully funded. In addition, the County's Comprehensive Zoning Plan and the Adequate Public Facilities Plan require residential and commercial developers to address the transportation impacts before new residential, commercial, or industrial entities are approved for construction.

#### **2.5.2.10.4 Rail**

{There is some discussion of implementing light rail train service between Washington D.C. and La Plata (in Charles County) within the next 15 years. If this occurred, out-bound commuting along the MD 301 corridor would be expected to increase dramatically (SMCMP, 2003).}

There are no rail depots in Calvert County. The nearest depot is in adjacent Prince George's County (MDDBED, 2007). There also are no rail depots in St. Mary's County. The nearest depot is in the adjacent Charles County, in Waldorf (MDDBED, 2007).

#### **2.5.2.10.5 Freight Carriers**

{There are 23 motor freight common carriers that serve Calvert County and there are 17 motor freight common carriers that serve St. Mary's County (MDDBED, 2007).}

#### **2.5.2.10.6 Deep Water Ports**

{There are no deep water ports in Calvert County or St. Mary's County. Both are served by the Port of Baltimore (MDDBED, 2007). However, the CCNPP site does have its own barge dock that is used for delivery of large equipment or large quantities of materials.}

#### **2.5.2.11 References**

**{AAA, 2007.}** AAA Motor Club, Website: [www.aaa.com](http://www.aaa.com), Date accessed: May 8, 2007.

**Apartments, 2007.** Apartments, Website: [www.apartments.com](http://www.apartments.com), Date accessed: June 13, 2007.

**AHA, 2006.** AHA Guide 2007, America's Directory of Hospitals and Healthcare Systems (Hospitals, U.S./Maryland, A345), American Hospital Association, 2006.

**BLS, 2005.** Construction and Extraction Occupations, Website: [http://stats.bls.gov/oes/current/oes\\_47900.htm](http://stats.bls.gov/oes/current/oes_47900.htm), Department of Labor, Bureau of Labor Statistics, Occupational Employment and Wage Estimates, Date Accessed: December 1, 2006.

**CC, 2007.** Calvert County Marinas, The Distinctive Guide to Calvert County, Maryland, Calvert County, Maryland, Website: [www.calvertcountymd.us/calvert-county-marinas.html](http://www.calvertcountymd.us/calvert-county-marinas.html), Date accessed: June 14, 2007.

**CCBCC, 2005.** Adopted Operating and Capital Budget, Fiscal Year 2007, Calvert County Board of County Commissioners, Prince Frederick, Maryland, July 1, 2005.

**CCCAFR, 2005.** Calvert County Government 2005 Comprehensive Annual Fiscal Report, Calvert County Department of Finance and Budget, Prince Frederick, Maryland, June 30, 2005.

**CCDED, 2007a.** Calvert County, Maryland Campgrounds, Calvert County Economic Development, Website: [www.ecalvert.com/content/tourism/visitorsguide/campgrounds/index.asp](http://www.ecalvert.com/content/tourism/visitorsguide/campgrounds/index.asp), Date accessed: June 15, 2007.

**CCDED, 2007b.** Boating, Marinas, Calvert County Department of Economic Development, Website: [www.ecalvert.com/content/tourism/visitorsguide/boating/marinas.asp](http://www.ecalvert.com/content/tourism/visitorsguide/boating/marinas.asp), Date accessed: June 14, 2007.

**CCDFB, 2005.** Calvert County Board of County Commissioners Adopted Operating and Capital Budget, Fiscal Year 2007, For Fiscal Year Beginning July 1, 2005. Calvert County Department of Finance & Budget, Prince Frederick, Maryland, 2005.

**CCSD, 2007.** Elementary, Middle, and High School Directory, Calvert County School District, Website: [www.calvertnet.k12.md.us/schools/sdirectory.asp](http://www.calvertnet.k12.md.us/schools/sdirectory.asp), Date accessed: May 22, 2007.

**CCMP, 2004.** 2004 Comprehensive Plan, Calvert County, Maryland: The Basics-Quality of Life, Calvert County Master Plan, Calvert County, Maryland, 2004.

**CCPS, 2005.** Year 3 Submission, The Bridge to Excellence, Calvert County Public Schools Master Plan, Calvert County, Maryland, November 2005.

**CCRG, 2006.** Water and Sewer Systems Transitioning to New Rate In 2006, Calvert County: Residents Guide, Website: <http://www.co.cal.md.us/residents/water/SystemsIn2006.asp>, Date accessed: December 5, 2006.

**CHE, 2006.** Institution Directory: Colleges of Southern Maryland (accredited), Middle States Commission on Higher Education, Website: [http://www.msche.org/institutions\\_print.asp?idinstitution=141](http://www.msche.org/institutions_print.asp?idinstitution=141), Date accessed November 24, 2006.

**CCWS, 2007.** Calvert County Water and Sewer, Calvert County, Maryland, Website: [www.co.cal.md.us/residents/water/RateInfo.asp](http://www.co.cal.md.us/residents/water/RateInfo.asp), Date accessed: June 8, 2007.

**DB, 2007.** Boat Marinas & Ramps, Discover Boating, Website: [www.discoverboating.com/beginner/marinas.asp](http://www.discoverboating.com/beginner/marinas.asp), Date Accessed: June 14, 2007.

**FD, 2007.** Fire Departments, Website: [www.firedepartments.net](http://www.firedepartments.net), Date accessed: May 23, 2007.

**GC, 2007.** Go Camping - Maryland, Website: [www.gocampingamerica.com/campgrounds](http://www.gocampingamerica.com/campgrounds), Date accessed: May 18, 2007.

**GS, 2007.** The Parent's Guide to K-12 Success, Great Schools, Website: [www.greatschools.net](http://www.greatschools.net), Date Accessed: June 3, 2007.

[LMP, 2006. Lusby Town Center, Master Plan and Zoning Ordinance, Calvert County, Maryland, Amended May 2006.](#)

**MD, 2007.** Information for Business Taxpayers, Comptroller of Maryland, Website: [www.business.marylandtaxes.com/taxinfo/salesanduse/default.asp](http://www.business.marylandtaxes.com/taxinfo/salesanduse/default.asp), Date Accessed: March 22, 2007.

**MDDBED, 2006.** Maryland Department of Business & Economic Development, Baltimore, Maryland, Website: [www.choosemaryland.org](http://www.choosemaryland.org), Date accessed: November 28, 2006.

**MDDBED, 2007.** Facts and Figures, Transportation, Maryland Department of Business and Economic Development, Baltimore, Maryland, Website: [www.choosemaryland.org/factsandfigures/transportation/transportationindex.html](http://www.choosemaryland.org/factsandfigures/transportation/transportationindex.html), Date accessed: 2007.

**MDDE, 2006.** School Facilities Master Plan, Maryland Department of Education, dated 2006.

**MDSP, 2007.** 2006 Annual Report, State of Maryland, Department of State Police, 2006.

**MDDLRL, 2006a.** Office of Labor-Market Analysis, Maryland Department of Labor, Licensing & Regulation, 2006.

**MDDLRL, 2006b.** Maryland Occupational Projections: 2002 – 2012, Top 100 Occupations by Total Openings, Updated March 22, 2005, Website: [www.dlrl.state.md.us/lmi/iandoproj/totopeni.htm](http://www.dlrl.state.md.us/lmi/iandoproj/totopeni.htm), Maryland Department of Labor, Licensing & Regulation, Date Accessed: December 3, 2006.

**MDDLRL, 2006c.** Maryland Monthly Labor Review: October 2006, Maryland Nonagricultural Wage and Salary Employment (in thousands), Updated November 22, 2006, Website: [www.dlrl.state.md.us/lmi/mlr/mdnonjun.htm](http://www.dlrl.state.md.us/lmi/mlr/mdnonjun.htm), Maryland Department of Labor, Licensing & Regulation, Date Accessed: December 3, 2006.

**MDDP, 2005.** Historical data from U S Bureau of Economic Analysis, SA25, Historical and Projected Total Jobs by Place of Work for Maryland Jurisdictions, Prepared by Maryland Department of Planning, Planning Data Services, November 2006, Website: [http://www.mdp.state.md.us/msdc/projection/TotalJobProjections\\_2006.pdf](http://www.mdp.state.md.us/msdc/projection/TotalJobProjections_2006.pdf), Date accessed May 2007.

**MDDP, 2006.** Maryland 2005 Statistical Handbook, Data from the U S BEA Tables SA25 & SA 25N, Maryland Department of Planning, Planning Data Services, 2006.

**MDNR, 2000.** Maryland Atlas of Greenways, Water Trails, and Green Infrastructure, 2000 Edition, Maryland Department of Natural Resources, Maryland Greenways Commission, Website: <http://dnr.maryland.gov/greenways/counties/calvert.html>, Date accessed: May 2007.

**MDDNR, 2006.** Maryland Power Plants and the Environment: A Review of the Impacts of Power Plants and Transmission Lines on Maryland's Natural Resources, CEIR-13, Economic Development, Maryland Department of Natural Resources, Power Plant Research Program Annapolis, Maryland, January 17, 2006.

[MDL, 2006. "Hospitality and Tourism", Maryland Department of Labor, Baltimore, Maryland, May 2006.](#)



**MIEMSS, 2006.** 2005-2006 Annual Report, Maryland Institute for Emergency Medical Services Systems (MIEMSS), Website: <http://miemss.umaryland.edu/AnnRpt.pdf>, Date accessed: May 2007.

**MLS, 2006.** Local Real Estate Market: Raw data for Calvert County and Raw data for St. Mary's County, MLS Resale Data: Metropolitan Regional Information Systems, Inc., Southern Maryland Association of Realtors. Website (Calvert County): [http://www.southernmarylandrealtors.org/county\\_stats/2005/Calvert/Calvert%20County%20Year%20End%202005%20DA%20report.pdf](http://www.southernmarylandrealtors.org/county_stats/2005/Calvert/Calvert%20County%20Year%20End%202005%20DA%20report.pdf), Website (St. Mary's County): [http://www.southernmarylandrealtors.org/county\\_stats/2005/St%20Marys/St%20Mary%27s%20Year%20End%202005%20DA%20report.pdf](http://www.southernmarylandrealtors.org/county_stats/2005/St%20Marys/St%20Mary%27s%20Year%20End%202005%20DA%20report.pdf), Date accessed: November 25, 2006.

**NAL, 2006.** Native American Tribes of Maryland. Website: <http://www.native-languages.org/maryland.htm>. Date accessed: November 24, 2006.

**SM, 2003.** Quality of Life in St. Mary's County - A Strategy for the 21st Century, as amended by the St Mary's County Planning Commission, St Mary's County Master Plan, 2003.

**SMC, 2005.** 2005 State of the County Report, St. Mary's County Board of County Commissioners, Leonardtown, Maryland, 2005.

[SMC, 2006. St. Mary's County Maryland, Approved Revenues and Appropriations, Operating and Capital Budgets, Fiscal Year 2006. St. Mary's County Commissioners. Leonardtown, Maryland. May 2006.](#)

[SMH, 2006. St. Mary's Hospital Annual Report, 2006. Leading with Innovatin, Serving with Compassion. St. Mary's Hospital. Leonardtown, Maryland.](#)

[SMH, 2007. St. Mary's Hospital Annual Report, 2007. Growth, Strength, Excellence. St. Mary's Hospital. Leonardtown, Maryland.](#)

**SMCBCC, 2006.** Approved Budget, Fiscal Year 2007, St. Mary's County Board of County Commissioners, Leonardtown, Maryland, May 30, 2006.

**SMCDT, 2007.** St. Mary's County, Maryland, Destination Guide, St. Mary's County Division of Tourism, Website: [www.co.saint-marys.md.us/Tourism/docs/destinationbrochuretourism.pdf](http://www.co.saint-marys.md.us/Tourism/docs/destinationbrochuretourism.pdf), Date Accessed: June 14, 2007.

**SMCMC, 2007.** Potable Water Distribution & Waste Water Treatment, Water Quality Reports – All Systems – Sampled in 2005, St. Mary's County Metropolitan Commission, Website: [www.metcom.org/Documents/water\\_quality\\_menu.htm](http://www.metcom.org/Documents/water_quality_menu.htm), Date Accessed: June 8, 2007.

**SMCMP, 2003.** Quality of Life in St Mary's County - A Strategy for the 21st Century, St. Mary's County, Maryland, Adopted February 19, 2002 and amended March 24, 2003. Website: <http://www.co.saint-marys.md.us/planzone/docs/CompPlanamendedMarch03.pdf>, Date accessed: May 2007.

**SMCPs, 2007.** St. Mary's County Public Schools 2006-2007 Directory of Schools, St. Mary's County Public Schools, Website: [www.smcps.k12.md.us/offices/boe/schooldir.shtml](http://www.smcps.k12.md.us/offices/boe/schooldir.shtml), Date accessed: May 30, 2007.

**SMCTT, 2007.** Marinas, St. Mary's County Travel & Tourism, Website: [www.co.saint-marys.md.us/tourism/tourismtemplate.asp](http://www.co.saint-marys.md.us/tourism/tourismtemplate.asp), Date Accessed: June 14, 2007.

**SMDPS, 2005.** Calls for Service Statistics, St. Mary's County Department of Public Safety, Website: [www.co.saint-marys.md.us/emergencycomm/stats.asp](http://www.co.saint-marys.md.us/emergencycomm/stats.asp), Date accessed: June 29, 2007.

**SMDPW, 2006.** St. Mary's County Transportation Plan, St. Mary's County Department of Public Works, California, Maryland, Website: [www.co.saint-marys.md.us/dpw/docs/transportationplan/LongTermReport-Adopted.pdf](http://www.co.saint-marys.md.us/dpw/docs/transportationplan/LongTermReport-Adopted.pdf) Date accessed: August, 2006.

**SMDPW, 2007.** Airport Operations: Airport Master Plan, St. Mary's County Department of Public Works and Transportation. Transportations Services Division, Airport Operations Division, Website: <http://www.co.saint-marys.md.us/dpw/dpwtemplate.asp?content=masterplancontent.asp>, Date accessed: May 21, 2007.

**SMH, 2008.** [St. Mary's Hospital Information Page \(www.smhwecare.com, accessed 3/10/08\)](http://www.smhwecare.com)

**SMMC, 2006.** Potable Water Distribution & Waste Water Treatment, St. Mary's County Metropolitan Commission, Website: <http://www.metcom.org/Main/about.htm>, Date accessed: December 2006.

**SMVFA, 2004.** May 2004 Directory, Southern Maryland Volunteer Fireman's Association, 2004.

**SMTS, 2006.** SMART Transportation, Other Program Information, St Mary's County Department of Public Works and Transportation, Transportations Services Division. Websites: <http://www.co.saint-marys.md.us/dpw/dpwtemplate.asp?content=smarttransportationcontent.asp>, and <http://www.co.saint-marys.md.us/dpw/dpwtemplate.asp?content=stsotherprograminfocontent.asp>, Date accessed: November 26, 2006.

**USCB, 2000a.** Table DP-2, Profile of Selected Social Characteristics: 2000, U.S. Census Bureau, 2000.

**USCB, 2000b.** Table DP-3, Profile of Selected Economic Characteristics: 2000, U.S. Census Bureau, 2000.

**USCB, 2000c.** Table DP-4, Profile of Selected Housing Characteristics: 2000, U.S. Census Bureau, 2000.

**USCB, 2000d.** Table DP-1, Profile of General Demographic Characteristics: 2000, U.S. Census Bureau, 2000.

**USCB, 2000e.** U S Census Bureau County and City Data Book: 2000. Counties: B-4. Vital Statistics and Health, U.S. Census Bureau, Website: [http://www.census.gov/prod/2002pubs/00ccdb/cc00\\_tabB4.pdf](http://www.census.gov/prod/2002pubs/00ccdb/cc00_tabB4.pdf), Date accessed: May 2007.

**USCB, 2005.** American FactFinder, U.S. Census Bureau, 2000.

**USCB, 2006.** State and Metropolitan Area Data Book, Table B-6, Physicians, Community Hospitals, Medicare, Social Security, and SSI, 2003, U.S. Census Bureau, Washington, D.C., 2006.}

## 2.5.3 HISTORICAL PROPERTIES

### 2.5.3.1 Overview

Detailed archaeological and historical surveys of the {CCNPP site for Unit 3} and associated onsite transmission corridors supporting {CCNPP Unit 3} have been conducted. The cultural resources investigation consisted of Phase Ia and Ib surveys that were conducted of the proposed project area between {October 2006 and January 2007}. The Phase Ia survey was conducted to identify previously recorded or surface-visible archaeological resources and architectural resources, and to identify those areas with archaeological potential that would require a Phase Ib survey. The Phase Ib survey was conducted to identify subsurface archaeological resources, record all known archaeological and architectural resources in the proposed project area, and to evaluate the recorded resources for eligibility to the National Register of Historic Places.

There are {two} Areas of Potential Effect (APE) for cultural resources that could potentially be affected by the proposed project. The APE for physical disturbance is {600 acres (243 hectares)} and was based on the location and extent of areas required for all project-related construction activities. The APE for visual effects to architectural resources includes the {600 acres (243 hectares)} and extends {1000 ft (305 m) beyond the 600 acre (243 hectare)} boundary.

### 2.5.3.2 Survey Methodologies

The {Phase Ia and Ib} survey methodologies were developed and conducted in accordance with Federal and State laws, regulations, and guidelines, including: Section 106 of the National Historic Preservation Act (USC, 2007), guidelines developed by the Advisory Council on Historic Preservation, the amended Procedures for the Protection of Historic and Cultural Properties as set forth in 36 CFR 800 (CFR, 2007a), the Secretary of the Interior's Standards and Guidelines for Archeology and Historic Preservation (NPS, 1983), National Register Bulletin 15 – How to Apply the National Register Criteria for Evaluation (NPS, 1992a), National Register Bulletin 21 – Defining Boundaries for National Register Properties (NPS, 1992b), {the Standards and Guidelines for Archeological Investigations in Maryland (MHT, 1994), the Standards and Guidelines for Architectural and Historical Investigations in Maryland (MHT, 2000), and General Guidelines for Compliance-Generated Determinations of Eligibility (MHT, 2002)}.

### 2.5.3.3 Qualification of Surveyors

{GAI Consultants, Inc. conducted the Phase Ia and Ib surveys}. The surveyors meet and exceed the professional qualifications as stipulated in 36 CFR Part 61 (CFR, 2007b). {The surveyors are listed on the Maryland Historical Trust Preservation Consultant List and have completed similar survey projects in Maryland.}

### 2.5.3.4 {Phase 1a Investigation}

The Phase Ia survey, as discussed in the Final Interim Phase 1b Report (GAI, 2007), was conducted on the 600 acre (243 hectare) APE in October 2006. The Phase Ia survey included background research of files and records, geomorphological reconnaissance, and archaeological reconnaissance. Background research was conducted to identify previously recorded historic properties located within the proposed project area. Examination of archaeological site files, historic structure files, National Register of Historic Places listings, historic maps, and cultural resource reports was conducted at the Maryland Historical Trust in Crownsville, Maryland, and the Calvert County Historical Society and Calvert County Department of Planning and Zoning, both located in Prince Frederick, Maryland.

Geomorphological reconnaissance of the APE was conducted to identify landforms with moderate to high potential to contain archaeological sites, identify areas of surface disturbance, and estimate relative landform ages. The geomorphological reconnaissance included study of topographic maps and a walkover of the APE with periodic shovel and hand auger tests to observe the soils. Information was recorded on maps and with a GPS unit.

Archaeological reconnaissance of the APE was conducted to identify surface-visible archaeological resources and architectural resources. The archaeological reconnaissance included a walkover of the APE, excavation of occasional judgmental shovel tests, and locational recording of cultural resources observed. Information was recorded on maps and with a GPS unit. Architectural resources located within the APE for visual effects were noted and were photographed for preliminary review by an architectural historian.

The Phase Ia background research identified two previously recorded cultural resources located within the proposed project area, the CCNPP itself and a tobacco barn. The geomorphological reconnaissance determined that 190 acres (77 hectares) of landforms within the APE have a moderate to high archaeological potential that required Phase Ib investigation. The remaining 410 acres (166 hectares) were excluded due to slopes in excess of 10%, soil disturbance (largely associated with construction of the existing plant facility), or the presence of wetlands or recent deposits. The reconnaissance also determined that there are no settings within the APE with a potential for deeply buried archaeological resources. The archaeological reconnaissance re-located the previously recorded tobacco barn and the power plant. New cultural resources discovered within the APE and the visual effects APE during the Phase Ia archaeological reconnaissance include portions of the Baltimore and Drum Point Railroad, five historic-age archaeological sites, and four buildings.

#### **2.5.3.5 Phase 1b Investigation**

The Phase Ib archaeological survey and cultural resource recording was conducted on 190 acres (77 hectares), located in parcels throughout the APE, identified during the Phase Ia survey as having moderate to high potential for containing archaeological resources. Phase Ib architectural resource recording was also conducted within the APE for visual effects. This survey was conducted from November 2006 through January 2007.

The Phase Ib survey included more extensive background research, systematic shovel testing within the 190 acres (77 hectares), and recording and evaluation of all identified archaeological and architectural resources located within the APE and visual effects APE. Background research was conducted to collect material to be used to develop a context for evaluation of recorded resources and to provide background information on specific resources. The research included review of architectural survey reports, published histories of Calvert County, historic maps of the project area, and files at the University of Baltimore's Langsdale Library.

Systematic shovel testing was conducted in the 190 acres (77 hectares) identified as having moderate to high potential for containing archaeological resources. Shovel testing, rather than pedestrian surface inspection, was necessary due to poor ground visibility. Systematic shovel test pits (STPs) were excavated at 50 ft (15 m) intervals within transects spaced 50 ft (15 m) apart. Additional STPs were excavated in select areas to confirm the presence of cultural artifacts, disturbed soils, or recent deposits. A total of 3,573 STPs were excavated across the 190 acres (77 hectares). Excavated soils were screened through 0.25 in (0.6 cm) wire mesh for systematic artifact recovery.

Identified architectural resources were recorded using photographs, maps, and Maryland Historical Trust Determination of Eligibility forms. Prehistoric and historic artifacts recovered

during systematic shovel testing were bagged and labeled with appropriate provenience information. STP locations were recorded on project maps and were backfilled upon completion. Identified archaeological resources were recorded on standardized forms, plotted on maps, documented with photographs, and their locations were recorded using mapping grade GPS equipment.

The Phase Ib survey resulted in identification, recording, and evaluation of 5 historic-age architectural resources within the APE for visual effects. These resources, all located within the boundaries of the CCNPP site, comprise 21 buildings/structures. Table 2.5-38 summarizes the five resources and the recommended National Register of Historic Places status (GAI, 2007).

The Phase Ib survey excavated 3,573 STPs within the 190 acres (77 hectares), of which 229 STPs yielded 844 artifacts (833 historic-age and 11 prehistoric). The survey resulted in identification, recording, and evaluation of 14 archaeological sites and 25 isolated archaeological finds. Table 2.5-39 summarizes the 14 sites. Table 2.5-40 summarizes the 25 isolated archaeological finds. Both tables show the recommended National Register of Historic Places status for each site and isolated find (GAI, 2007.)

### **2.5.3.6 Consultation**

{The Maryland State Historic Preservation Officer (SHPO) has been consulted with throughout completion of the Phase Ia and Ib surveys to ensure compliance and maintain a strong working relationship. The results of the Phase Ia and Ib surveys were documented in a February 2007 report (GAI, 2007). This report was submitted the Maryland SHPO for review and consultation under Section 106 of the National Historic Preservation Act (USC, 2007). Comments from the Phase Ia and Ib surveys were received from the Maryland SHPO in a letter dated June 7, 2007 (MHT, 2007).}

In addition, consultation with potentially interested Native American tribes is pending. Information from the tribal consultation could influence the National Register of Historic Places status of any of the recorded resources. As project design and layout are finalized, any additions to the APE would be surveyed and evaluated for potential impacts to historic properties {in consultation with the Maryland SHPO}, prior to activities taking place in the additional APE.

### **2.5.3.7 Site National Register Eligibility**

Tables 2.5-41 and 2.5-42 list the potentially eligible archaeological sites and eligible architectural resources located within the project APEs. {These evaluations of eligibility reflect the comments received from the Maryland SHPO (MHT, 2007). Phase II archaeological investigations, and subsequent consultation with the Maryland SHPO will be performed for the four potentially eligible archaeological sites to determine their National Register of Historic Places eligibility, if they cannot be avoided by construction activities.}

### **2.5.3.8 Offsite National Register Eligibility**

{Research was conducted to identify previously recorded cultural resources located within 10 mi (16 km) of the proposed project site that are listed in the National Register of Historic Places; that have been determined eligible or determined potentially eligible for listing on the National Register of Historic Places; that have not been evaluated for National Register of Historic Places listing; and/or that are listed in the Maryland Register of Historic Places or county and local registers or inventories. Research was conducted at the Maryland Historical Trust archives and library, Calvert County Department of Planning and Zoning, St. Mary's County Department of Land Use and Growth Management, and the Dorchester County

Planning and Zoning Department. Research was also conducted of the National Register of Historic Places and list of National Historic Landmarks.

Research identified 1,029 previously surveyed, inventoried, and recorded cultural resources within a 10 mi (16 km) radius of the existing CCNPP site. This number includes historic districts, buildings, sites, and objects. Resource types range from archaeological sites and historic districts with numerous contributing resources to boats, a lighthouse, churches, dwellings, factories, commercial buildings, cemeteries, parks, and a tree. The resources identified are located in the Maryland counties of St. Mary's, Calvert, and Dorchester.

Appendix 2.5-A contains the full list of cultural resources located within the 10 mi (16 km) radius. None of the offsite cultural resources are affected by the construction and subsequent operation of the proposed CCNPP Unit 3.

### 2.5.3.9 References

**{CFR, 2007a.** Title 36, Code of Federal Regulations, Part 800, Protection of Historic Properties, 2007.

**CFR, 2007b.** Title 36, Code of Federal Regulations, Part 61, Procedures for Approved State and local Government Historic Preservation Programs, 2007.

**{MHT, 1994.** Standards and Guidelines for Archaeological Investigations in Maryland, Maryland Historical Trust, Shaffer, Gary D. and E. Cole, 1994.

**MHT, 2000.** Standards and Guidelines for Architectural and Historical Investigations in Maryland, Maryland Historical Trust, 2000.

**MHT, 2002.** General Guidelines for Compliance-Generated Determinations of Eligibility, Maryland Historical Trust, 2002.

**MHT, 2007.** Letter from J. Rodney Little, Director- State Historic Preservation Officer, Maryland Historic Trust to R.M. Krich, UniStar Nuclear, June 7, 2007.

**NPS, 1983.** Secretary of the Interior's Standards and Guidelines, Standards and Guidelines for Archeology and Historic Preservation, as published in the Federal Register (48 FR 44716 – 44742), National Park Service, U.S. Department of the Interior, Washington, D.C., 1983.

**NPS, 1992a.** National Register Bulletin 15 - How to Apply the National Register Criteria for Evaluation, National Park Service, U.S. Department of the Interior, Washington, D.C., 1992.

**NPS, 1992b.** National Register Bulletin 21 - Defining Boundaries for National Register Properties, National Park Service, U.S. Department of the Interior, Washington, D.C., 1992.

**GAI, 2007.** Management Summary, Phase Ib Cultural Resources Investigation, Calvert Cliffs Nuclear Power Plant, GAI Consultants Inc, February 23, 2007.

**USC, 2007.** Title 16, United States Code, Part 470, National Historic Preservation Act of 1966, as amended, 2007.}

## 2.5.4 ENVIRONMENTAL JUSTICE

Executive Order 12898, Federal Actions to Address Environmental Justice in Minority Populations and Low-Income Populations (EO, 1999), directs Federal agencies to identify and address, as appropriate, disproportionately high and adverse health or environmental effects of their programs, policies, and activities on minority populations and low-income populations. Environmental justice is defined as the fair treatment and meaningful involvement of all people regardless of race, color, national origin, or income with respect to the development, implementation, and enforcement of environmental laws, regulations, and policies (EPA, 2007). The Council on Environmental Quality (CEQ) has provided guidance for addressing environmental justice (CEQ, 1997). NUREG-1555, Section 2.5.4 (NRC, 1999), the Nuclear Regulatory Commission (NRC) Policy Statement on the treatment of environmental justice in licensing matters (FR, 2004), and the NRC Office Instruction LIC-203, Revision 1, regarding procedural guidance for preparing environmental assessments (NRC, 2004) were used to develop the following analysis. Project impacts are discussed in Chapter 4 and Chapter 5 for any minority or low-income populations identified in this section.

Similar to Section 2.5.1 and Section 2.5.2, this section describes the minority and low income populations residing within a 50 mi (80 km) comparative geographic area and {the two-county region of influence (ROI)} that includes {Calvert County and St. Mary's County}. The 50 mi (80 km) comparative geographic area was selected based upon the guidance provided by NUREG-1555 (NRC, 1999) and was established by using the {Calvert Cliffs Nuclear Power Plant (CCNPP)} site as the center point and drawing a 50 mi (80 km) radius circle around the {CCNPP} site. {This area includes portions of Maryland, Virginia, Washington D.C., and Delaware.}

{The region of influence (ROI) includes Calvert County and St. Mary's County, Maryland. The borders of these counties extend less than 30 mi (50 km) from the CCNPP site. These adjacent counties are located in the southern part of Maryland, on a peninsula bounded by the Chesapeake Bay and the Patuxent River. Potential socioeconomic impacts, if any, arising from the proposed plant are likely to be confined to these two counties because a majority of the existing workforce for CCNPP Units 1 and 2 reside in these counties and it is assumed that the potential in-migrating construction and operational workforces for CCNPP Unit 3 are most likely to reside in this same two-county ROI. More than 91% of the current workforce at CCNPP resides in Calvert County or St. Mary's County. Of the 833 employees at the CCNPP site, approximately 560 (67%) of the workers had a home address in Calvert County and approximately 200 (24%) of these workers had a home address in St. Mary's County.}

### 2.5.4.1 Methodology to Identify and Locate Minority and Low Income Populations

{Using ArcView® GIS software and U.S. Census Bureau's 2000 census data (USCB, 2000a) (USCB, 2000b), all census block groups within a 50 mi (80 km) radius were identified. A census block group was included in the 50 mi (80 km) comparative geographic area if its boundaries were fully contained in the area, or if any part of the census block group was contained in the area. The ArcView® GIS software and U.S. Census Bureau's 2000 census data were then used to determine the minority and low income characteristics, by census block group, within 50 mi (80 km) of the CCNPP site and within each county.}

As shown in Table 2.5-43, the 50 mi (80 km) radius contains a total of 2,177 census block groups. Within the 50 mi (80 km) radius, there are 14 Maryland counties with a total of 1,116 census block groups. There also are 16 counties in Virginia that contain 605 census block groups, Washington D.C. contains a total of 433 census block groups, and there are 2 counties in Delaware that contain 23 census block groups.}

Within the ROI, there are a total of {96 census block groups. Calvert County has a total of 41 census block groups and St. Mary's County has 55 census block groups.}

### 2.5.4.1.1 Minority Populations

A "minority" racial population is defined as: American Indian or Alaskan Native; Asian, Native Hawaiian, or other Pacific Islander; Black (African-American) races; and multi-racial, or "some other race" (NRC, 2004). The racial population is expressed in terms of the number and/or percentage of people that are minorities in an area. The sum of these racial minority populations is referred to, within this section, as the aggregate racial minority population. Persons of Hispanic/Latino origin are the ethnic minority, may be of any race including the identified racial populations, and thus are identified as a separate subcategory.

The NRC guidance indicates that a minority population exists if either of the following two criteria is met:

1. The minority population of the census block group or environmental impact area (in this case the 50 mi (80 km) comparative geographic area) exceeds 50%; or
2. The minority population percentage of the environmental impact area is significantly greater (typically at least 20 percentage points) than the minority population percentage in the geographic area chosen for comparative analysis (in this case the 50-mile comparative geographic area).

For each of the {2,177} census block groups within the 50 mi (80 km) radius, the percent of the census block group's population represented by each minority classification (each race, aggregate minority population, and Hispanic/Latino origin) was calculated and compared to the two criteria listed above. If any census block group minority percentage exceeded 50%, then the block group was identified as containing a minority population. If any census block group percentage exceeded the applicable percentage in the 50 mi (80 km) geographical area by more than 20 percentage points, then the census block group was identified as containing a minority population.

Table 2.5-44 and Figure 2.5-4 through Figure 2.5-8 identify the various minority block groups. Within the 50 mi (80 km) comparative geographic area there are a total of {891} census block groups that are classified as having minority populations. {Maryland has 463 minority census block groups, Virginia has 113 blocks, Washington D.C. has 312 blocks, and Delaware has 3 minority census block groups.}

{There are no federally recognized Native American tribes within the 50 mi (80 km) comparative geographic area {or within the State of Maryland. However, non-recognized Native American tribes and communities include the Piscataway-Conroy Confederacy based in La Plata, in Charles County. There are established Amish and Mennonite communities in the northwestern section of St. Mary's County, Maryland. Phase 1 cultural resources survey consultation with Native American tribes is complete. Additional consultation will also occur with the SHPO during Phase II investigations.}

### 2.5.4.1.2 Low Income Populations

One of the common means of tracking income levels is by total income for a household, rather by the total number of people in an area (as was done for minority populations, above). The Census Bureau's definition of a low income household is based on governmental statistical



poverty thresholds. For the purposes of conducting this analysis, a block group is considered to be low income if either of the following two criteria are met:

1. The number of low income households in the census block group or the environmental impact site (in this case the 50 mi (80 km) geographic area) exceeds 50%; or
2. The percentage of households below the poverty level in an environmental impact area is significantly greater (typically at least 20 percentage points) than the low income population percentage in the geographic area chosen for comparative analysis (in this case, the 50 mi (80 km) comparative geographic area).

As determined by the 2000 Census survey (USCB, 2000b), low income households in each census block group were divided by the total households for that census block group to obtain the percentage of low income households per block group. If any census block group low income percentage exceeded 50%, then the block group was identified as containing a low income population. If any census block group percentage exceeded the applicable percentage in the geographical area by more than 20 percentage points, then the census block group was identified as containing a low income population.

Tables 2.5-41-43 and 2.5-45 present low income census block group information, and Figure 2.5-9 shows the locations of the low income block groups. Within the 50 mi (80 km) comparative geographic area there are a total of {67} census block groups that are classified as having low income populations. {Maryland has 27 low income census blocks, Virginia has 3 blocks, Washington D.C. has 35 blocks, and Delaware has 2 low income census blocks.}

## 2.5.4.2 Analysis

### 2.5.4.2.1 Minority Populations

#### 50 mi (80 km) Comparative Geographic Area

Table 2.5-44 summarizes minority populations by the portion of {each state and Washington D.C.} within the 50 mi (80 km) radius of the site. There are {714} census block groups within the 50 mi (80 km) radius that have an African-American race population that meets at least one of the two criteria defined as a minority population; {22} census block groups are defined as Asian; {38} census block groups as "Some Other Race;" and {130} census block groups as Hispanic.

{Based on the "20 percentage points" or the "exceeded 50%" criterion, no American Indian or Alaskan Native; Native Hawaiian or other Pacific Islander; or multi-racial minority census block groups exist in the geographic area.

As shown in Figure 2.5-4, concentrations of census block groups of African-American minority populations are most prevalent in the Washington-Arlington-Alexandria, DC-MD-VA-WV Metropolitan Area and in Prince Georges County, with 632 of the 714 census block groups classified as an African-American minority.}

There are {22} census block groups that meet the criteria of being an Asian minority; the majority of these census blocks are in {Fairfax County, Virginia}. Figure 2.5-5 presents this information and shows the locations of Asian minority populations.

There are {38} census block groups of persons that are "Some Other Race" that meet the criteria; {12} of those census block groups are in {Prince Georges County, Maryland} and {15} are

in {the Washington-Arlington-Alexandria, DC-MD-VA-WV Metropolitan Area}. Figure 2.5-6 presents this information and shows the locations of Other Minority Populations.

The aggregate (i.e., total) of {891} census block groups within the 50 mi (80 km) radius are defined as aggregate racial minority populations. The aggregate racial minority populations are shown on Figure 2.5-7.

{There are 130 census block groups that have a population of persons of Hispanic origin. Hispanic populations within 50 mi (80 km) of the CCNPP site are primarily in Prince Georges County, Maryland, and in Fairfax County and Arlington County, Virginia. Figure 2.5-8 locates the census block groups with significant Hispanic populations.}

#### {Two-County} Region of Influence

{No census block group in Calvert County is defined as being a racial minority or a Hispanic minority population, or as having an aggregate (i.e., total) minority population.}

Two census block groups in St. Mary's County are defined as meeting the definition of having an aggregate minority concentration, but no census block groups met the definition of having an individual racial minority or a Hispanic population.}

### **2.5.4.2.2 Low Income Populations**

#### 50 mi (80 km) Comparative Geographic Area

{As shown in Table 2.5-45, there are very few concentrations of low income populations within 50 mi (80 km) of the site. Figure 2.5-9 shows the locations of low income census block groups within a 50 mi (80 km) radius of the CCNPP site. There are 67 census block groups that exceed the 50 mi (80 km) radius' average number of low income households by 20 percentage points or more. Of those 67 census block groups, 35 are located in Washington DC and 27 are located in Maryland.}

#### {Two-County} Region of Influence

{There are no low income census block groups in Calvert County. There is only 1 low income census block group in St. Mary's County, out of the total of 55 census block groups located there.}

### **2.5.4.3 Subsistence Uses**

Subsistence is the use of natural resources as food for consumption and for ceremonial and traditional cultural purposes. Often these types of activities are discussed for minority populations, but sometimes also for low income populations. Subsistence information is often difficult to collect, partially because it is relatively site specific and because it is difficult to differentiate between subsistence uses and recreational uses of natural resources. Often, a number of different informational sources have to be relied upon that collect data via different methods, for different classifications of groups, and for differing types of uses. Thus, it is not possible to present this information for the 50 mi (80 km) and ROI study areas that have been used in previous sections. Common major classifications of subsistence uses include gathering plants for consumption, for medicinal purposes, and use in ceremonial activities; fishing; and hunting. These activities are in addition to or replace portions of the foods that might be bought from businesses, and thus can represent reduced costs of living. They also often represent an important part of the cultural identity or lifestyle of the participants. This section presents the subsistence/recreational information that is available from a variety of sources obtained through an internet search.

{About 220 acres (89 hectares) of the CCNPP site are currently developed. For safety and security reasons the general public is not allowed uncontrolled access to the CCNPP site. Thus, no ceremonial or subsistence gathering of culturally significant plants, berries, or other vegetation occurs on the site.}

#### **2.5.4.3.1 Plant Gathering**

{Although no information could be found, it is assumed that collection of plants for ceremonial and food purposes (i.e., culturally significant plants, berries, or other vegetation) could be occurring in the two-county region of influence. Again, minority and low-income populations might be conducting these collection activities, off of the CCNPP site more often, or could be harvesting greater quantities of plants, than the general population.}

#### **2.5.4.3.2 Hunting**

{As stated in Section 2.4.1.2.1 and Section 4.3.1.2, white-tail deer and waterfowl populations are abundant throughout Maryland and on or near the CCNPP site. These populations represent a valuable resource for hunters. While hunting for deer and waterfowl occurs in the ROI, no hunting is allowed on the CCNPP site.}

#### **2.5.4.3.3 Fishing**

{Predominant subsistence, recreational, and commercial fisheries in the Chesapeake Bay include the eastern oyster, blue crab, soft shell clams, and striped bass. Weakfish, bluefish, spot, croaker, flounder, herring, other finfish, and other shellfish are also harvested in the Chesapeake Bay. As shown in Table 2.5-46 (CFEPTAP, 2004), the most common species caught by Chesapeake Bay recreational users within the states of Maryland and Virginia in the year 2000 were Atlantic Croaker (3,780 tons or 3,429 metric tons, mt), Striped Bass (2,054 tons or 1,863 mt), Summer Flounder (852 tons or 773 mt), Weakfish (585 tons or 531 mt), and Bluefish (239 tons or 217 mt). In comparison, the most common commercially caught species were Atlantic Menhaden, Black Sea Bass or Blue Crab (see table note regarding conflicting information), Atlantic Croaker, Striped Bass, Eastern Oyster, and Summer Flounder. Chesapeake Bay oysters breeding and nursery areas occur and are commercially harvested near the CCNPP site (MDNR, 2006).

In 2004, Gibson and McClafferty (GM, 2005) conducted studies of recreational fishing for three areas of the Chesapeake Bay, including the Lower Patapsco and Back Rivers in the Baltimore region, the Lower Potomac and Anacostia Rivers in the Washington D.C. region, and the Elizabeth and James Rivers in the Tidewater region of Virginia. As shown in Table 2.5-47 through Table 2.5-49 (GM, 2005), the most common species harvested in the Baltimore region were Striped Bass/Rockfish (27.9%), White Perch (21.8%), and Blue Crab/Crab (12.0%). In the Washington D.C. region, the most commonly harvested species were Catfish (29.2%), Striped Bass/Rockfish (17.3%), and Largemouth Bass (10.9%). In the Virginia region, the most commonly harvested species were Croaker (38.1%), Spot (19.3%), and Flounder (12.2%).

Some of Gibson and McClafferty's findings also are summarized by minority anglers and by the income levels of anglers. The following sections briefly summarize the results of these recreational studies, focusing on the fishing characteristics of minority and low income populations.}

#### **2.5.4.4 Subsistence Uses by Minority Populations**

{As shown in Table 2.5-50 through Table 2.5-52 (GM, 2005), the vast majority of minorities harvesting fish and shellfish in the three regions studied were African-Americans (ranging from

33% to 49% of the total number of people surveyed). There were very limited proportions of other types of minorities, but the most notable were 9.3% of Hispanics/Latinos and 5.7% of Asians surveyed in the Washington D.C. region.

Significantly more Caucasian recreationists fished from boats, and conversely a significantly greater percentage of minorities fished from the shore or piers in the three regions. Minorities traveled 10 mi or less to conduct their harvesting activities more often than Caucasians (83% versus 54%) in the Washington D.C. region, about equally (48% versus 44%) in the Virginia region, and less often than Caucasians (67% versus 85%) in the Baltimore region.

African-Americans in the Baltimore region and in the Virginia region were more likely than Caucasians to state that subsistence fishing was important as a means of reducing food expenses (44% versus 17% in Baltimore and 52% versus 34% in Virginia). However, equal percentages of African-Americans and Caucasians stated that subsistence was important as a way of reducing food costs (12% versus 13%). African-Americans were somewhat to moderately more likely than Caucasians to eat the fish that they harvested in all three regions. For both groups, the impression that the water was polluted was a greater reason given for not consuming fish than was the publication of fish advisories.}

#### 2.5.4.5 Subsistence Uses by Low Income Populations

{Gibson and McClafferty (GM, 2005) also evaluated the harvesting activities of anglers using the following annual income categories: \$20,000 or less, \$20,001 to \$40,000, \$40,001 to \$80,000, and \$80,001 or more. They found that, generally speaking, there were relatively few differences between recreationists in each of these income categories than were found for minorities as shown in Tables 2.5-53 and Table 2.5-54. In the Baltimore region, the only significant differences were that those in the \$20,001 - \$40,000 income category were more likely (40%) than other groups to state that subsistence fishing was important as a means of reducing food expenses. In addition, those with annual incomes of \$40,001 or more were more likely to consume fish than members of other income categories.

In the Washington D.C. and the Virginia regions, those making \$80,000 or less were more likely to fish from shore or a pier, and those making \$80,001 or more were more likely to fish from a boat. As might be expected, those fishing from boats also usually preferred to use sites that had boat ramps available for use. Also, anglers making \$40,000 or less were more likely to fish within 10 mi (16 km) of their residences and those making \$40,001 or more were more likely to travel greater distances. For both regions, the importance of subsistence fishing as a means for reducing food expenses for the household tended to decreased with each increase income category.}

### 2.5.5 REFERENCES

**{CEQ, 1997.** Environmental Justice Guidance Under the National Environmental Policy Act, Council on Environmental Quality, December 10, 1997.

**CFEPTAP, 2004.** Fisheries Ecosystem Planning for Chesapeake Bay. Chesapeake Fisheries Ecosystem Plan Technical Advisory Panel, February, 2004.

**EO, 1994.** Executive Order 12898, Federal Actions to Address Environmental Justice in Minority Populations and Low-Income Populations, 59 FR 7629, February 11, 1994.

**EPA, 2007.** Environmental Justice, Environmental Protection Agency, Website: <http://www.epa.gov/compliance/environmentaljustice/index.html>, Date accessed: May 20, 2007.

**FR, 2004.** Federal Register, 69 FR 52040, Policy Statement on the Treatment of Environmental Justice Matters in NRC Regulations and Licensing Actions, Volume 69, Number 163, August 24, 2004.

**GM, 2005.** Chesapeake Bay Angler Interviews: Identifying Populations at Risk for Consuming Contaminated Fish in Three Regions of Concern, Results for the Elizabeth/James River Region of Concern, CMI-HDD-05-01, J. Gibson and J. McClafferty, Human Dimensions Division, Conservation Management Institute, College of Natural Resources, Virginia Polytechnic Institute and State University, Prepared for the Chesapeake Bay Program, March 29, 2005.

**MDNR, 2006.** Maryland Power Plants and the Environment: A Review of the Impacts of Power Plants and Transmission Lines on Maryland's Natural Resources, Economic Development, CEIR-13, Maryland Department of Natural Resources, Power Plant Research Program, January 17, 2006.

**NRC, 1999.** Standard Review Plans for Environmental Reviews for Nuclear Power Plants, NUREG-1555, Nuclear Regulatory Commission, October 1999.

**NRC, 2004.** Procedural Guidance for Preparing Environmental Assessments and Considering Environmental Issues NRR Office Instruction No. LIC-203, Revision 1, Nuclear Regulatory Commission, May 24, 2004.

**USCB, 2000a.** Race [71] – Universe: Total Population, Census 2000 Summary File 1 (SF 1), Page 3, U.S. Census Bureau, Website: <http://factfinder.census.gov>, Date accessed: December 21, 2006.

**USCB, 2000b.** Poverty Status in 1999 of Households by Household Type by Age of Householder [59] – Universe: Households, Census 2000 Summary File 3 (SF 3), Page 92, U.S. Census Bureau, Website: <http://factfinder.census.gov>, Date accessed: December 21, 2006.}

**Table 2.5-1—{Counties of Residence for Existing CCNPP Units 1 and 2 Operational Employees}**

(Page 1 of 1)

| County of Residence | CCNPP Units 1 and 2 Employees |         |
|---------------------|-------------------------------|---------|
|                     | Number                        | Percent |
| Alleghany           | 1                             | 0.1%    |
| Anne Arundel        | 27                            | 3.2%    |
| Baltimore           | 4                             | 0.5%    |
| Calvert             | 562                           | 67.5%   |
| Charles             | 30                            | 3.6%    |
| Howard              | 2                             | 0.2%    |
| Prince Georges      | 6                             | 0.7%    |
| St. Mary's          | 198                           | 23.8%   |
| Washington          | 1                             | 0.1%    |
| Out of State        | 2                             | 0.2%    |
| Total               | 833                           | 99.9%   |

Note:

The total percentage does not equal 100.0% due to rounding.

**Table 2.5-2—{Select Demographic and Economic Characteristics of Residential Population, By Distance from the CCNPP Site, 2000}**

(Page 1 of 1)

| Demographic and Economic Characteristics  | Radii/Distances mi (km)    |                              |                              |                              |                              |                            |
|---|----------------------------|------------------------------|------------------------------|------------------------------|------------------------------|----------------------------|
|   | 0 to 10 mi<br>(0 to 16 km) | 10 to 20 mi<br>(16 to 32 km) | 20 to 30 mi<br>(32 to 48 km) | 30 to 40 mi<br>(48 to 60 km) | 40 to 50 mi<br>(60 to 80 km) | 0 to 50 mi<br>(0 to 80 km) |
| Total Population <sup>(1)</sup>   | 42,150                     | 111,659                      | 163,358                      | 618,846                      | 2,259,157                    | 3,195,170                  |
| <b>Age Composition:</b>   |                            |                              |                              |                              |                              |                            |
| Person under 5 yrs old  | 2,992                      | 7,588                        | 10,873                       | 41,578                       | 148,788                      | 211,819                    |
| Persons 18 yrs and over   | 29,458                     | 80,295                       | 120,226                      | 456,584                      | 1,738,152                    | 2,424,715                  |
| Persons 65 yrs and older  | 4,203                      | 9,721                        | 18,951                       | 61,657                       | 218,766                      | 313,298                    |
| <b>Gender Composition:</b>  |                            |                              |                              |                              |                              |                            |
| Females   | 21,169                     | 55,925                       | 83,981                       | 322,859                      | 1,161,278                    | 1,645,212                  |
| <b>Ethnic Composition:</b>  |                            |                              |                              |                              |                              |                            |
| Caucasians <sup>(2)</sup>   | 35,454                     | 91,113                       | 116,465                      | 265,801                      | 1,170,147                    | 1,678,980                  |
| African-Americans <sup>(2)</sup>  | 5,219                      | 15,657                       | 40,378                       | 322,496                      | 767,075                      | 1,150,825                  |
| Persons of Hispanic/Latino origins <sup>(3)</sup>   | 782                        | 1,885                        | 2,578                        | 14,135                       | 241,685                      | 261,065                    |
| <b>Income Characteristics:</b>  |                            |                              |                              |                              |                              |                            |
| Median Household Income <sup>(4)</sup> , 1999   | \$61,369                   | \$59,241                     | \$57,945                     | \$60,221                     | \$57,464                     | \$57,464                   |
| <b>Notes:</b><br><sup>(1)</sup> Resident population excludes transient populations.<br><sup>(2)</sup> Persons describing themselves as of one race only.<br><sup>(3)</sup> Persons of Hispanic or Latino origin may be of any race.<br><sup>(4)</sup> Median Household Income is the median income for the cumulative households from the CCNPP site; for example. Median Household Income in column labeled 30 to 40 mi (48 to 60 km) is the median for all household 0 to 40 mi (0 to 60 km) from the plant site. |                            |                              |                              |                              |                              |                            |

**Table 2.5-3—{Historical and Projected Populations in Calvert County,  
St. Mary's County, and Maryland from 1970 to 2030}**

(Page 1 of 1)

| Year | Calvert County |  | St. Mary's County |  | Region Of Influence –<br>Calvert and St. Mary's<br>Combined |  | State of Maryland |  |
|------|----------------|--|-------------------|--|---|--|-------------------|--|
|      | Population     | Average<br>Annual<br>Growth<br>Percent | Population        | Average<br>Annual<br>Growth<br>Percent | Population  | Average<br>Annual<br>Growth<br>Percent | Population        | Average<br>Annual<br>Growth<br>Percent |
| 1970 | 20,682         | --                                     | 47,388            | --                                     | 68,070  | --                                     | 3,923,897         | --                                     |
| 1980 | 34,638         | 5.29% <sup>(1)</sup>                   | 59,895            | 2.37% <sup>(1)</sup>                   | 94,553  | 3.9%                                   | 4,216,933         | 0.72% <sup>(1)</sup>                   |
| 1990 | 51,372         | 4.02%                                  | 75,974            | 2.41%                                  | 127,346   | 3.5%                                   | 4,780,753         | 1.26%                                  |
| 2000 | 74,563         | 3.80%                                  | 86,211            | 1.27%                                  | 160,774   | 2.6%                                   | 5,296,486         | 1.03%                                  |
| 2005 | 88,750         | 3.54%                                  | 96,550            | 2.29%                                  | 185,300   | 3.1%                                   | 5,609,200         | 1.15%                                  |
| 2010 | 96,950         | 1.78%                                  | 108,150           | 2.30%                                  | 205,100   | 2.1%                                   | 5,907,575         | 1.04%                                  |
| 2015 | 99,450         | 0.51%                                  | 119,900           | 2.08%                                  | 219,350   | 1.4%                                   | 6,127,225         | 0.73%                                  |
| 2020 | 101,950        | 0.50%                                  | 131,200           | 1.82%                                  | 233,150   | 1.3%                                   | 6,362,975         | 0.76%                                  |
| 2030 | 105,950        | 0.39%                                  | 152,150           | 1.49%                                  | 258,100   | 1.1%                                   | 6,703,800         | 0.52%                                  |

Note:  
<sup>(1)</sup> Average Annual Growth Rate from previously noted year (example, 5.29% annual change in Calvert County from 1970 to 1980).



**Table 2.5-4—{Select Demographic and Economic Characteristics of Persons in Calvert County, St. Mary's County, Maryland, and the U.S. From 2000 to 2004}**

(Page 1 of 1)

| <b>Demographic and Economic Characteristics</b>   | <b>Calvert County</b> | <b>St. Mary's County</b> | <b>State of Maryland</b> | <b>U.S.</b> |
|---|-----------------------|--------------------------|--------------------------|-------------|
| Population Levels, Change, Density:   |                       |                          |                          |             |
| Total Population, 2000  | 74,563                | 86,211                   | 5,296,486                | 281,421,906 |
| Total Population Estimate, 2004   | 86,434                | 94,921                   | 5,558,058                | 293,656,842 |
| Average Annual Percent Change, 2000-2004  | 4.0%                  | 2.5%                     | 1.2%                     | 1.1%        |
| Population per square mile, 2000  | 376.5                 | 238.6                    | 541.9                    | 79.6        |
| <b>Age Composition:</b>   |                       |                          |                          |             |
| Persons under 5 years old, 2004   | 6.1%                  | 7.0%                     | 6.7%                     | 6.8%        |
| Persons 18 years and over, 2004   | 73.5%                 | 73.4%                    | 74.9%                    | 75%         |
| Persons 65 years old and older, 2004  | 9.2%                  | 9.2%                     | 11.4%                    | 12.4%       |
| <b>Gender Composition:</b>  |                       |                          |                          |             |
| Females, 2004   | 50.7%                 | 49.9%                    | 51.6%                    | 50.8%       |
| <b>Ethnic Composition:</b>  |                       |                          |                          |             |
| Caucasians, 2004 <sup>(1)</sup>   | 84.7%                 | 82.1%                    | 64.5%                    | 80.4%       |
| African-Americans , 2004 <sup>(1)</sup>   | 12.8%                 | 13.9%                    | 29.1%                    | 12.8%       |
| Persons of Hispanic/Latino origin, 2004 <sup>(2)</sup>  | 1.9%                  | 2.2%                     | 5.4%                     | 14.1%       |
| <b>Income Characteristics:</b>  |                       |                          |                          |             |
| Median Household Income, 2003   | \$71,488              | \$58,651                 | \$54,302                 | \$43,318    |
| Persons below poverty, 2003   | 5.3%                  | 7.4%                     | 8.8%                     | 12.5%       |
| <b>Notes:</b><br><sup>(1)</sup> . Persons describing themselves as being of one race only<br><sup>(2)</sup> . Persons of Hispanic or Latino Origin may be of any race |                       |                          |                          |             |

**Table 2.5-5—{Demographic and Economic Characteristics of Residential Populations in Select Cities and Communities within Calvert County and St. Mary's County, 2000}**

(Page 1 of 2)

|  | Cities or Communities (CDPs)   |                                |                     |                                    |            |                     |          |             |                       |
|--|--------------------------------|--------------------------------|---------------------|------------------------------------|------------|---------------------|----------|-------------|-----------------------|
| Demographic Characteristics                        | California, CDP <sup>(1)</sup> | Calvert Beach- Long Beach, CDP | Charlotte Hall, CDP | Chesapeake Estates-Drum Point, CDP | Leonardtwn | Lexington Park, CDP | Lusby    | North Beach | Prince Frederick, CDP |
| Total Population                                   | 9,307                          | 2,487                          | 1,214               | 11,503                             | 1,896      | 11,021              | 1,666    | 1,880       | 1,432                 |
| <b>Age Composition:</b>                            |                                |                                |                     |                                    |            |                     |          |             |                       |
| Persons under 5 years old                          | 694                            | 184                            | 58                  | 974                                | 80         | 1,112               | 86       | 154         | 92                    |
| Persons 18 years and over                          | 6,568                          | 1,718                          | 994                 | 7,558                              | 1,594      | 7,554               | 1,191    | 1,366       | 1,118                 |
| Persons 65 years and older                         | 678                            | 169                            | 403                 | 748                                | 578        | 337                 | 216      | 136         | 372                   |
| <b>Gender Composition:</b>                         |                                |                                |                     |                                    |            |                     |          |             |                       |
| Females  | 4,635                          | 1,246                          | 484                 | 5,753                              | 1,036      | 5,138               | 861      | 994         | 830                   |
| <b>Ethic Composition:</b>                          |                                |                                |                     |                                    |            |                     |          |             |                       |
| Caucasians <sup>(3)</sup>                          | 7,323                          | 2,248                          | 923                 | 9,837                              | 1,380      | 6,612               | 1,202    | 1,683       | 891                   |
| African-Americans <sup>(3)</sup>                   | 1,370                          | 165                            | 245                 | 1,210                              | 455        | 3,306               | 412      | 117         | 484                   |
| Persons of Hispanic / Latino <sup>(2)</sup> origin | 255                            | 42                             | 7                   | 280                                | 16         | 527                 | 46       | 39          | 26                    |
| <b>Income Characteristics:</b>                     |                                |                                |                     |                                    |            |                     |          |             |                       |
| Median Household Income <sup>(4)</sup> , 1999      | \$62,320                       | \$63,262                       | \$51,111            | \$56,904                           | \$35,563   | \$39,214            | \$40,769 | \$46,111    | \$44,625              |
| Persons below poverty                              | 407                            | 28                             | 169                 | 558                                | 330        | 1,219               | 72       | 203         | 226                   |

**Table 2.5-5—{Demographic and Economic Characteristics of Residential Populations in Select Cities and Communities within Calvert County and St. Mary's County, 2000}**

(Page 2 of 2)

| Demographic Characteristics | Cities or Communities (CDPs)   |                                |                     |                                    |             |                     |       |             |                       |
|-----------------------------|--------------------------------|--------------------------------|---------------------|------------------------------------|-------------|---------------------|-------|-------------|-----------------------|
|                             | California, CDP <sup>(1)</sup> | Calvert Beach- Long Beach, CDP | Charlotte Hall, CDP | Chesapeake Estates-Drum Point, CDP | Leonardtown | Lexington Park, CDP | Lusby | North Beach | Prince Frederick, CDP |

Notes:

- <sup>(1)</sup> CDP = Census Designated Place; a statistical counterpart of an incorporated place; a concentration of population, housing, and commercial structures that are identifiable by name, but are not incorporated.
- <sup>(2)</sup> Persons of Hispanic/Latino origin may be of any race or a combination of races.
- <sup>(3)</sup> Persons describing themselves as of one race only.
- <sup>(4)</sup> The Census Bureau states that the median household income for the Prince Frederick CDP is \$22,321. This number is inconsistent with other Census Bureau income information and, therefore, is assumed to be incorrectly reported by them. Thus, for illustrative purposes, the median family income is reported here.

**Table 2.5-6—{Resident and Transient Populations, by Sector and Distance from the CCNPP Site, 2000}**  
(Page 1 of 2)

| Sector/Type of Population | Population by Radii/Distances mi (km) |                    |                    |                    |                    |                      |                      |
|---------------------------|---------------------------------------|--------------------|--------------------|--------------------|--------------------|----------------------|----------------------|
|                           | 0 to 1<br>(0 to 2)                    | 1 to 2<br>(2 to 3) | 2 to 3<br>(3 to 5) | 3 to 4<br>(5 to 6) | 4 to 5<br>(6 to 8) | 5 to 10<br>(8 to 16) | 0 to 10<br>(0 to 16) |
| N Total                   | 0                                     | 0                  | 0                  | 0                  | 0                  | 0                    | 0                    |
| Transient Population      | 0                                     | 0                  | 0                  | 0                  | 0                  | 0                    | 0                    |
| Resident Population       | 0                                     | 0                  | 0                  | 0                  | 0                  | 0                    | 0                    |
| NNE Total                 | 0                                     | 0                  | 0                  | 0                  | 0                  | 0                    | 0                    |
| Transient Population      | 0                                     | 0                  | 0                  | 0                  | 0                  | 0                    | 0                    |
| Resident Population       | 0                                     | 0                  | 0                  | 0                  | 0                  | 0                    | 0                    |
| NE Total                  | 0                                     | 0                  | 0                  | 0                  | 0                  | 1                    | 1                    |
| Transient Population      | 0                                     | 0                  | 0                  | 0                  | 0                  | 0                    | 0                    |
| Resident Population       | 0                                     | 0                  | 0                  | 0                  | 0                  | 1                    | 1                    |
| ENE Total                 | 0                                     | 0                  | 0                  | 0                  | 0                  | 606                  | 606                  |
| Transient Population      | 0                                     | 0                  | 0                  | 0                  | 0                  | 408                  | 408                  |
| Resident Population       | 0                                     | 0                  | 0                  | 0                  | 0                  | 198                  | 198                  |
| E Total                   | 0                                     | 0                  | 0                  | 0                  | 0                  | 35                   | 35                   |
| Transient Population      | 0                                     | 0                  | 0                  | 0                  | 0                  | 0                    | 0                    |
| Resident Population       | 0                                     | 0                  | 0                  | 0                  | 0                  | 35                   | 35                   |
| ESE Total                 | 0                                     | 0                  | 0                  | 0                  | 0                  | 0                    | 0                    |
| Transient Population      | 0                                     | 0                  | 0                  | 0                  | 0                  | 0                    | 0                    |
| Resident Population       | 0                                     | 0                  | 0                  | 0                  | 0                  | 0                    | 0                    |
| SE Total                  | 0                                     | 0                  | 283                | 0                  | 188                | 0                    | 471                  |
| Transient Population      | 0                                     | 0                  | 283                | 0                  | 0                  | 0                    | 0                    |
| Resident Population       | 0                                     | 0                  | 0                  | 0                  | 188                | 0                    | 0                    |
| SSE Total                 | 0                                     | 0                  | 33                 | 974                | 3,242              | 4,664                | 8,913                |
| Transient Population      | 0                                     | 0                  | 0                  | 535                | 0                  | 0                    | 535                  |
| Resident Population       | 0                                     | 0                  | 33                 | 439                | 3,242              | 4,664                | 8,378                |
| S Total                   | 0                                     | 67                 | 245                | 189                | 1,504              | 9,006                | 11,011               |
| Transient Population      | 0                                     | 0                  | 217                | 0                  | 0                  | 3,163                | 3,380                |
| Resident Population       | 0                                     | 67                 | 28                 | 189                | 1,504              | 5,843                | 7,631                |
| SSW Total                 | 0                                     | 43                 | 207                | 143                | 204                | 6,795                | 7,392                |
| Transient Population      | 0                                     | 0                  | 0                  | 0                  | 0                  | 1,477                | 1,477                |
| Resident Population       | 0                                     | 43                 | 207                | 143                | 204                | 5,318                | 5,915                |
| SW Total                  | 0                                     | 329                | 0                  | 165                | 57                 | 2,865                | 3,416                |

**Table 2.5-6—{Resident and Transient Populations, by Sector and Distance from the CCNPP Site, 2000}**

(Page 2 of 2)

|                      | Population by Radii/Distances mi (km) |       |       |       |       |        |        |
|----------------------|---------------------------------------|-------|-------|-------|-------|--------|--------|
| Transient Population | 0                                     | 0     | 0     | 0     | 0     | 485    | 485    |
| Resident Population  | 0                                     | 329   | 0     | 165   | 57    | 2,380  | 2,931  |
| WSW Total            | 0                                     | 857   | 702   | 65    | 445   | 2,323  | 4,392  |
| Transient Population | 0                                     | 0     | 90    | 0     | 360   | 33     | 483    |
| Resident Population  | 0                                     | 857   | 612   | 65    | 85    | 2,290  | 3,909  |
| W Total              | 30                                    | 432   | 289   | 175   | 357   | 1,465  | 2,748  |
| Transient Population | 0                                     | 0     | 0     | 0     | 0     | 135    | 135    |
| Resident Population  | 30                                    | 432   | 289   | 175   | 357   | 1,330  | 2,613  |
| WNW Total            | 0                                     | 55    | 59    | 85    | 506   | 2,723  | 3,428  |
| Transient Population | 0                                     | 0     | 0     | 0     | 0     | 378    | 378    |
| Resident Population  | 0                                     | 55    | 59    | 85    | 506   | 2,345  | 3,050  |
| NW Total             | 0                                     | 695   | 1,157 | 1,037 | 319   | 2,416  | 5,624  |
| Transient Population | 0                                     | 263   | 151   | 0     | 32    | 0      | 446    |
| Resident Population  | 0                                     | 432   | 1,006 | 1,037 | 287   | 2,416  | 5,178  |
| NWW Total            | 0                                     | 0     | 0     | 0     | 0     | 718    | 718    |
| Transient Population | 0                                     | 0     | 0     | 0     | 0     | 0      | 0      |
| Resident Population  | 0                                     | 0     | 0     | 0     | 0     | 718    | 718    |
| Total Population     | 30                                    | 2,478 | 2,975 | 2,833 | 6,822 | 33,617 | 48,755 |
| Transient Population | 0                                     | 263   | 741   | 535   | 392   | 6,079  | 8,010  |
| Resident Population  | 30                                    | 2,215 | 2,234 | 2,298 | 6,430 | 27,538 | 40,745 |

**Table 2.5-7—{Commuting Patterns To and From the ROI, 2000}**

(Page 1 of 1)

| Parameter  | County/ROI | Charles County | Prince George's County | Anne Arundel County | District of Columbia | Other | Total  |
|--|------------|----------------|------------------------|---------------------|----------------------|-------|--------|
| Worker Inflow to ROI   | Calvert    | 640            | 641                    | 1,118               | 59                   | 678   | 3,136  |
|  | St. Mary's | 2,197          | 378                    | 262                 | 126                  | 1,357 | 4,320  |
|  | ROI        | 2,837          | 1,019                  | 1,380               | 185                  | 2,035 | 7,456  |
| Worker Outflow from ROI  | Calvert    | 1,178          | 8,243                  | 1,739               | 3,967                | 3,909 | 19,036 |
|  | St. Mary's | 3,313          | 2,244                  | 80                  | 1,828                | 1,886 | 9,351  |
|  | ROI        | 4,491          | 10,487                 | 1,819               | 5,795                | 5,795 | 28,387 |
| Net Worker Outflow from ROI  | Calvert    | 538            | 7,602                  | 621                 | 3,908                | 3,231 | 15,900 |
|  | St. Mary's | 1,116          | 1,866                  | (182)               | 1,702                | 529   | 5,031  |
|  | ROI        | 1,654          | 9,468                  | 439                 | 5,610                | 3,760 | 20,931 |
| Note:<br>ROI = region of influence (Calvert County and St. Mary's County combined) |            |                |                        |                     |                      |       |        |

**Table 2.5-8—{Current Population and Population Projections  
for the {CCNPP} Low Population Zone}**

(Page 1 of 1)

| Year                         | LPZ<br>Population | Average Annual Percent Change for the<br>10 Year Period |
|------------------------------|-------------------|---|
| 2000                         | 2,508             | NA  |
| 2010                         | 2,884             | 1.5%  |
| 2015                         | 3,102             | NA  |
| 2020                         | 3,336             | 1.57%   |
| 2030                         | 3,827             | 1.47%   |
| 2040                         | 4,414             | 1.53%   |
| 2050                         | 5,092             | 1.54%   |
| 2055                         | 5,455             | NA  |
| 2060                         | 5,844             | 1.48%   |
| Note:<br>NA = not applicable |                   |   |

**Table 2.5-9—{Population Projections from 2000 to 2060 within 50 mi (80 km)  
of the CCNPP Site}**

(Page 1 of 1)

| Year                | Population Projections within Radii/Distances mi (km) |                                    |                                 |                                 |                                    |                                 |  | Annual<br>Average<br>Percent<br>Change for<br>the 10 Year<br>Period |
|---------------------|---|------------------------------------|---------------------------------|---------------------------------|------------------------------------|---------------------------------|--|---|
|                     | 0 to 10<br>mi <sup>(1)</sup><br>(0 to 16<br>km)       | 10 to 20<br>mi<br>(16 to 32<br>km) | 20 to 30 mi<br>(32 to 48<br>km) | 30 to 50 mi<br>(48 to 80<br>km) | 30 to 40<br>mi<br>(48 to 60<br>km) | 40 to 50 mi<br>(60 to 80<br>km) | Total<br>0 to 50<br>mi <sup>(4)</sup><br>(0 to 80<br>km) |   |
| 2000 <sup>(2)</sup> | 48,755  | 112,841                            | 162,006                         | 2,886,668                       | 618,907                            | 2,267,761                       | 3,210,270  | NA  |
| 2010 <sup>(3)</sup> | 57,937  | 139,384                            | 189,097                         | 3,116,981                       | 683,019                            | 2,433,962                       | 3,503,399  | 0.91%   |
| 2015 <sup>(3)</sup> | 63,441  | 155,687                            | 204,844                         | 3,252,151                       | 719,341                            | 2,532,810                       | 3,676,123  | NA  |
| 2020 <sup>(3)</sup> | 69,504  | 174,040                            | 222,222                         | 3,395,683                       | 757,969                            | 2,637,714                       | 3,861,449  | 1.02%   |
| 2030 <sup>(3)</sup> | 83,129  | 216,740                            | 263,498                         | 3,729,663                       | 845,378                            | 2,884,285                       | 4,293,030  | 1.12%   |
| 2040 <sup>(3)</sup> | 99,840  | 271,210                            | 314,001                         | 4,122,037                       | 947,388                            | 3,174,649                       | 4,807,088  | 1.20%   |
| 2050 <sup>(3)</sup> | 120,508   | 340,666                            | 376,926                         | 4,586,827                       | 1,062,906                          | 3,523,921                       | 5,424,927  | 1.29%   |
| 2060 <sup>(3)</sup> | 145,458   | 428,351                            | 454,445                         | 5,134,257                       | 1,200,670                          | 3,933,587                       | 6,162,511  | 1.36%   |

**Notes:**

<sup>(1)</sup> Population estimates and projections include transient and residential population in the 0 to 10 mi (0 to 16 km) range.

<sup>(2)</sup> Residential population in 2000, US Census Bureau, Decennial Census.

<sup>(3)</sup> The populations for years 2010 through 2060 have been projected by calculating a growth rate using state population projections (by county) as the base.

<sup>(4)</sup> Transient population is only included in the 0 to 10 mi (0 to 16 km) distribution.



**Table 2.5-10—{Population Projections by Sector and Distance from the CCNPP Site  
from 2000 to 2060}**

(Page 1 of 12)

| Sector       | Radius in mi<br>(km)     | Population Projection by Year |                   |                   |                   |                   |                   |                   |                   |
|--------------|--------------------------|-------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
|              |                          | 2000                          | 2010 <sup>4</sup> | 2015 <sup>4</sup> | 2020 <sup>4</sup> | 2030 <sup>4</sup> | 2040 <sup>4</sup> | 2050 <sup>4</sup> | 2060 <sup>4</sup> |
| N            | 0-1 (0-2) <sup>(1)</sup> | 0                             | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 |
| NNE          |                          | 0                             | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 |
| NE           |                          | 0                             | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 |
| ENE          |                          | 0                             | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 |
| E            |                          | 0                             | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 |
| ESE          |                          | 0                             | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 |
| SE           |                          | 0                             | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 |
| SSE          |                          | 0                             | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 |
| S            |                          | 0                             | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 |
| SSW          |                          | 0                             | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 |
| SW           |                          | 0                             | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 |
| WSW          |                          | 0                             | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 |
| W            |                          | 30                            | 35                | 37                | 40                | 46                | 53                | 61                | 70                |
| WNW          |                          | 0                             | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 |
| NW           |                          | 0                             | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 |
| NNW          |                          | 0                             | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 |
| <b>Total</b> |                          | <b>30</b>                     | <b>35</b>         | <b>37</b>         | <b>40</b>         | <b>46</b>         | <b>53</b>         | <b>61</b>         | <b>70</b>         |

**Table 2.5-10—{Population Projections by Sector and Distance from the CCNPP Site  
from 2000 to 2060}**

(Page 2 of 12)

| Sector       | Radius in mi<br>(km)     | Population Projection by Year |                   |                   |                   |                   |                   |                   |                   |
|--------------|--------------------------|-------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
|              |                          | 2000                          | 2010 <sup>4</sup> | 2015 <sup>4</sup> | 2020 <sup>4</sup> | 2030 <sup>4</sup> | 2040 <sup>4</sup> | 2050 <sup>4</sup> | 2060 <sup>4</sup> |
| N            | 1-2 (2-3) <sup>(1)</sup> | -                             | -                 | -                 | -                 | -                 | -                 | -                 | -                 |
| NNE          |                          | -                             | -                 | -                 | -                 | -                 | -                 | -                 | -                 |
| NE           |                          | -                             | -                 | -                 | -                 | -                 | -                 | -                 | -                 |
| ENE          |                          | -                             | -                 | -                 | -                 | -                 | -                 | -                 | -                 |
| E            |                          | -                             | -                 | -                 | -                 | -                 | -                 | -                 | -                 |
| ESE          |                          | -                             | -                 | -                 | -                 | -                 | -                 | -                 | -                 |
| SE           |                          | 0                             | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 |
| SSE          |                          | 0                             | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 |
| S            |                          | 67                            | 77                | 83                | 89                | 103               | 118               | 136               | 156               |
| SSW          |                          | 43                            | 49                | 53                | 57                | 66                | 76                | 87                | 100               |
| SW           |                          | 329                           | 378               | 407               | 438               | 503               | 579               | 668               | 767               |
| WSW          |                          | 857                           | 986               | 1,060             | 1,140             | 1,311             | 1,508             | 1,740             | 1,997             |
| W            |                          | 432                           | 497               | 535               | 575               | 661               | 760               | 877               | 1,007             |
| WNW          |                          | 55                            | 63                | 68                | 73                | 84                | 97                | 112               | 128               |
| NW           |                          | 695                           | 799               | 859               | 924               | 1,063             | 1,223             | 1,411             | 1,619             |
| NNW          |                          | 0                             | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 |
| <b>Total</b> |                          | <b>2,478</b>                  | <b>2,849</b>      | <b>3,065</b>      | <b>3,296</b>      | <b>3,791</b>      | <b>4,361</b>      | <b>5,031</b>      | <b>5,774</b>      |

**Table 2.5-10—{Population Projections by Sector and Distance from the CCNPP Site  
from 2000 to 2060}**

(Page 3 of 12)

| Sector       | Radius in mi<br>(km)     | Population Projection by Year |                   |                   |                   |                   |                   |                   |                   |
|--------------|--------------------------|-------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
|              |                          | 2000                          | 2010 <sup>4</sup> | 2015 <sup>4</sup> | 2020 <sup>4</sup> | 2030 <sup>4</sup> | 2040 <sup>4</sup> | 2050 <sup>4</sup> | 2060 <sup>4</sup> |
| N            | 2-3 (3-5) <sup>(1)</sup> | -                             | -                 | -                 | -                 | -                 | -                 | -                 | -                 |
| NNE          |                          | -                             | -                 | -                 | -                 | -                 | -                 | -                 | -                 |
| NE           |                          | -                             | -                 | -                 | -                 | -                 | -                 | -                 | -                 |
| ENE          |                          | -                             | -                 | -                 | -                 | -                 | -                 | -                 | -                 |
| E            |                          | -                             | -                 | -                 | -                 | -                 | -                 | -                 | -                 |
| ESE          |                          | -                             | -                 | -                 | -                 | -                 | -                 | -                 | -                 |
| SE           |                          | 283                           | 325               | 350               | 376               | 433               | 498               | 574               | 659               |
| SSE          |                          | 33                            | 38                | 41                | 44                | 50                | 58                | 67                | 77                |
| S            |                          | 245                           | 282               | 303               | 326               | 375               | 431               | 497               | 571               |
| SSW          |                          | 207                           | 238               | 256               | 275               | 317               | 364               | 420               | 482               |
| SW           |                          | 0                             | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 |
| WSW          |                          | 702                           | 807               | 868               | 934               | 1,074             | 1,236             | 1,425             | 1,636             |
| W            |                          | 289                           | 332               | 357               | 384               | 442               | 509               | 587               | 673               |
| WNW          |                          | 59                            | 68                | 73                | 78                | 90                | 104               | 120               | 137               |
| NW           |                          | 1,157                         | 1,331             | 1,431             | 1,539             | 1,770             | 2,036             | 2,349             | 2,696             |
| NNW          |                          | -                             | -                 | -                 | -                 | -                 | -                 | -                 | -                 |
| <b>Total</b> |                          | <b>2,975</b>                  | <b>3,421</b>      | <b>3,679</b>      | <b>3,956</b>      | <b>4,551</b>      | <b>5,236</b>      | <b>6,039</b>      | <b>6,931</b>      |

**Table 2.5-10—{Population Projections by Sector and Distance from the CCNPP Site  
from 2000 to 2060}**

(Page 4 of 12)

| Sector       | Radius in mi<br>(km)     | Population Projection by Year |                   |                   |                   |                   |                   |                   |                   |
|--------------|--------------------------|-------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
|              |                          | 2000                          | 2010 <sup>4</sup> | 2015 <sup>4</sup> | 2020 <sup>4</sup> | 2030 <sup>4</sup> | 2040 <sup>4</sup> | 2050 <sup>4</sup> | 2060 <sup>4</sup> |
| N            | 3-4 (5-6) <sup>(1)</sup> | -                             | -                 | -                 | -                 | -                 | -                 | -                 | -                 |
| NNE          |                          | -                             | -                 | -                 | -                 | -                 | -                 | -                 | -                 |
| NE           |                          | -                             | -                 | -                 | -                 | -                 | -                 | -                 | -                 |
| ENE          |                          | -                             | -                 | -                 | -                 | -                 | -                 | -                 | -                 |
| E            |                          | -                             | -                 | -                 | -                 | -                 | -                 | -                 | -                 |
| ESE          |                          | -                             | -                 | -                 | -                 | -                 | -                 | -                 | -                 |
| SE           |                          | 0                             | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 |
| SSE          |                          | 974                           | 1,120             | 1,204             | 1,295             | 1,490             | 1,714             | 1,977             | 2,269             |
| S            |                          | 189                           | 217               | 233               | 251               | 289               | 333               | 384               | 440               |
| SSW          |                          | 143                           | 164               | 177               | 190               | 219               | 252               | 290               | 333               |
| SW           |                          | 165                           | 190               | 204               | 219               | 252               | 290               | 335               | 384               |
| WSW          |                          | 65                            | 75                | 80                | 86                | 99                | 114               | 132               | 151               |
| W            |                          | 175                           | 201               | 216               | 233               | 268               | 308               | 355               | 408               |
| WNW          |                          | 85                            | 98                | 105               | 113               | 130               | 150               | 173               | 198               |
| NW           |                          | 1,037                         | 1,193             | 1,283             | 1,379             | 1,587             | 1,825             | 2,105             | 2,416             |
| NNW          |                          | -                             | -                 | -                 | -                 | -                 | -                 | -                 | -                 |
| <b>Total</b> |                          | <b>2,833</b>                  | <b>3,258</b>      | <b>3,502</b>      | <b>3,766</b>      | <b>4,334</b>      | <b>4,986</b>      | <b>5,751</b>      | <b>6,599</b>      |

**Table 2.5-10—{Population Projections by Sector and Distance from the CCNPP Site  
from 2000 to 2060}**

(Page 5 of 12)

| Sector       | Radius in mi<br>(km)   | Population Projection by Year |                   |                   |                   |                   |                   |                   |                   |
|--------------|------------------------|-------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
|              |                        | 2000                          | 2010 <sup>4</sup> | 2015 <sup>4</sup> | 2020 <sup>4</sup> | 2030 <sup>4</sup> | 2040 <sup>4</sup> | 2050 <sup>4</sup> | 2060 <sup>4</sup> |
| N            | 4-5 (6-8) <sup>1</sup> | -                             | -                 | -                 | -                 | -                 | -                 | -                 | -                 |
| NNE          |                        | -                             | -                 | -                 | -                 | -                 | -                 | -                 | -                 |
| NE           |                        | -                             | -                 | -                 | -                 | -                 | -                 | -                 | -                 |
| ENE          |                        | -                             | -                 | -                 | -                 | -                 | -                 | -                 | -                 |
| E            |                        | -                             | -                 | -                 | -                 | -                 | -                 | -                 | -                 |
| ESE          |                        | -                             | -                 | -                 | -                 | -                 | -                 | -                 | -                 |
| SE           |                        | 188                           | 216               | 232               | 250               | 288               | 331               | 382               | 438               |
| SSE          |                        | 3,242                         | 3,728             | 4,009             | 4,312             | 4,960             | 5,706             | 6,581             | 7,554             |
| S            |                        | 1,504                         | 1,730             | 1,860             | 2,000             | 2,301             | 2,647             | 3,053             | 3,504             |
| SSW          |                        | 204                           | 235               | 252               | 271               | 312               | 359               | 414               | 475               |
| SW           |                        | 57                            | 66                | 71                | 76                | 87                | 100               | 116               | 133               |
| WSW          |                        | 445                           | 512               | 551               | 592               | 681               | 783               | 903               | 1,037             |
| W            |                        | 357                           | 411               | 442               | 475               | 546               | 628               | 725               | 832               |
| WNW          |                        | 506                           | 582               | 626               | 673               | 774               | 891               | 1,027             | 1,179             |
| NW           |                        | 319                           | 367               | 394               | 424               | 488               | 561               | 648               | 743               |
| NNW          |                        | -                             | -                 | -                 | -                 | -                 | -                 | -                 | -                 |
| <b>Total</b> |                        | <b>6,822</b>                  | <b>7,847</b>      | <b>8,437</b>      | <b>9,073</b>      | <b>10,437</b>     | <b>12,006</b>     | <b>13,849</b>     | <b>15,895</b>     |

**Table 2.5-10—{Population Projections by Sector and Distance from the CCNPP Site  
from 2000 to 2060}**

(Page 6 of 12)

| Sector       | Radius in mi<br>(km)          | Population Projection by Year |                   |                   |                   |                   |                   |                   |                   |
|--------------|-------------------------------|-------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
|              |                               | 2000                          | 2010 <sup>4</sup> | 2015 <sup>4</sup> | 2020 <sup>4</sup> | 2030 <sup>4</sup> | 2040 <sup>4</sup> | 2050 <sup>4</sup> | 2060 <sup>4</sup> |
| N            | 5-10<br>(8-16) <sup>(1)</sup> | -                             | -                 | -                 | -                 | -                 | -                 | -                 | -                 |
| NNE          |                               | -                             | -                 | -                 | -                 | -                 | -                 | -                 | -                 |
| NE           |                               | 1                             | 1                 | 1                 | 1                 | 1                 | 2                 | 2                 | 2                 |
| ENE          |                               | 606                           | 673               | 705               | 739               | 818               | 909               | 1,006             | 1,109             |
| E            |                               | 35                            | 39                | 41                | 43                | 47                | 53                | 58                | 64                |
| ESE          |                               | 0                             | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 |
| SE           |                               | -                             | -                 | -                 | -                 | -                 | -                 | -                 | -                 |
| SSE          |                               | 4,664                         | 5,521             | 6,035             | 6,597             | 7,856             | 9,391             | 11,281            | 13,547            |
| S            |                               | 9,006                         | 10,618            | 11,581            | 12,631            | 14,972            | 17,808            | 21,284            | 25,421            |
| SSW          |                               | 6,795                         | 8,565             | 9,668             | 10,914            | 13,827            | 17,588            | 22,425            | 28,592            |
| SW           |                               | 2,865                         | 3,696             | 4,218             | 4,813             | 6,217             | 8,051             | 10,429            | 13,494            |
| WSW          |                               | 2,323                         | 2,975             | 3,383             | 3,847             | 4,940             | 6,362             | 8,202             | 10,566            |
| W            |                               | 1,465                         | 1,704             | 1,845             | 1,998             | 2,331             | 2,726             | 3,200             | 3,747             |
| WNW          |                               | 2,723                         | 3,131             | 3,368             | 3,622             | 4,166             | 4,792             | 5,528             | 6,345             |
| NW           |                               | 2,416                         | 2,778             | 2,988             | 3,213             | 3,696             | 4,252             | 4,904             | 5,629             |
| NNW          |                               | 718                           | 826               | 888               | 955               | 1,099             | 1,264             | 1,458             | 1,673             |
| <b>Total</b> |                               | <b>33,617</b>                 | <b>40,527</b>     | <b>44,721</b>     | <b>49,373</b>     | <b>59,970</b>     | <b>73,198</b>     | <b>89,777</b>     | <b>110,189</b>    |

**Table 2.5-10—{Population Projections by Sector and Distance from the CCNPP Site  
from 2000 to 2060}**

(Page 7 of 12)

| Sector       | Radius in mi<br>(km)          | Population Projection by Year |                   |                   |                   |                   |                   |                   |                   |
|--------------|-------------------------------|-------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
|              |                               | 2000                          | 2010 <sup>4</sup> | 2015 <sup>4</sup> | 2020 <sup>4</sup> | 2030 <sup>4</sup> | 2040 <sup>4</sup> | 2050 <sup>4</sup> | 2060 <sup>4</sup> |
| N            | 0-10<br>(0-16) <sup>(1)</sup> | 0                             | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 |
| NNE          |                               | 0                             | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 |
| NE           |                               | 1                             | 1                 | 1                 | 1                 | 1                 | 2                 | 2                 | 2                 |
| ENE          |                               | 606                           | 673               | 705               | 739               | 818               | 909               | 1,006             | 1,109             |
| E            |                               | 35                            | 39                | 41                | 43                | 47                | 53                | 58                | 64                |
| ESE          |                               | 0                             | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 |
| SE           |                               | 471                           | 541               | 582               | 626               | 721               | 829               | 956               | 1,097             |
| SSE          |                               | 8,913                         | 10,407            | 11,289            | 12,248            | 14,356            | 16,869            | 19,906            | 23,447            |
| S            |                               | 11,011                        | 12,924            | 14,060            | 15,297            | 18,040            | 21,337            | 25,354            | 30,092            |
| SSW          |                               | 7,392                         | 9,251             | 10,406            | 11,707            | 14,741            | 18,639            | 23,636            | 29,982            |
| SW           |                               | 3,416                         | 4,330             | 4,900             | 5,546             | 7,059             | 9,020             | 11,548            | 14,778            |
| WSW          |                               | 4,392                         | 5,355             | 5,942             | 6,599             | 8,105             | 10,003            | 12,402            | 15,387            |
| W            |                               | 2,748                         | 3,180             | 3,432             | 3,705             | 4,294             | 4,984             | 5,805             | 6,737             |
| WNW          |                               | 3,428                         | 3,942             | 4,240             | 4,559             | 5,244             | 6,034             | 6,960             | 7,987             |
| NW           |                               | 5,624                         | 6,468             | 6,955             | 7,479             | 8,604             | 9,897             | 11,417            | 13,103            |
| NNW          |                               | 718                           | 826               | 888               | 955               | 1,099             | 1,264             | 1,458             | 1,673             |
| <b>Total</b> |                               | <b>48,755</b>                 | <b>57,937</b>     | <b>63,441</b>     | <b>69,504</b>     | <b>83,129</b>     | <b>99,840</b>     | <b>120,508</b>    | <b>145,458</b>    |

**Table 2.5-10—{Population Projections by Sector and Distance from the CCNPP Site  
from 2000 to 2060}**

(Page 8 of 12)

| Sector       | Radius in mi<br>(km)            | Population Projection by Year |                   |                   |                   |                   |                   |                   |                   |
|--------------|---------------------------------|-------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
|              |                                 | 2000                          | 2010 <sup>4</sup> | 2015 <sup>4</sup> | 2020 <sup>4</sup> | 2030 <sup>4</sup> | 2040 <sup>4</sup> | 2050 <sup>4</sup> | 2060 <sup>4</sup> |
| N            | 10-20<br>(16-32) <sup>(2)</sup> | -                             | -                 | -                 | -                 | -                 | -                 | -                 | -                 |
| NNE          |                                 | 403                           | 436               | 454               | 472               | 513               | 553               | 598               | 651               |
| NE           |                                 | 1,020                         | 1,132             | 1,187             | 1,244             | 1,377             | 1,530             | 1,693             | 1,867             |
| ENE          |                                 | 1,668                         | 1,851             | 1,941             | 2,035             | 2,252             | 2,502             | 2,769             | 3,052             |
| E            |                                 | 236                           | 262               | 275               | 288               | 319               | 354               | 392               | 432               |
| ESE          |                                 | 709                           | 787               | 825               | 865               | 957               | 1,064             | 1,177             | 1,297             |
| SE           |                                 | 183                           | 203               | 213               | 223               | 247               | 275               | 304               | 335               |
| SSE          |                                 | 477                           | 615               | 702               | 801               | 1,035             | 1,340             | 1,736             | 2,247             |
| S            |                                 | 20,464                        | 26,399            | 30,126            | 34,380            | 44,407            | 57,504            | 74,489            | 96,385            |
| SSW          |                                 | 16,134                        | 20,813            | 23,752            | 27,105            | 35,011            | 45,337            | 58,728            | 75,991            |
| SW           |                                 | 8,487                         | 10,948            | 12,494            | 14,258            | 18,417            | 23,848            | 30,893            | 39,974            |
| WSW          |                                 | 7,558                         | 9,750             | 11,126            | 12,697            | 16,401            | 21,238            | 27,511            | 35,598            |
| W            |                                 | 11,560                        | 14,908            | 17,009            | 19,407            | 25,061            | 32,442            | 42,013            | 54,346            |
| WNW          |                                 | 11,857                        | 14,580            | 16,220            | 18,045            | 22,386            | 27,822            | 34,745            | 43,402            |
| NW           |                                 | 11,561                        | 13,098            | 13,982            | 14,925            | 16,958            | 19,283            | 21,960            | 24,961            |
| NNW          |                                 | 20,524                        | 23,602            | 25,381            | 27,295            | 31,399            | 36,118            | 41,658            | 47,813            |
| <b>Total</b> |                                 | <b>112,841</b>                | <b>139,384</b>    | <b>155,687</b>    | <b>174,040</b>    | <b>216,740</b>    | <b>271,210</b>    | <b>340,666</b>    | <b>428,351</b>    |



**Table 2.5-10—{Population Projections by Sector and Distance from the CCNPP Site  
from 2000 to 2060}**

(Page 9 of 12)

| Sector       | Radius in mi<br>(km)            | Population Projection by Year |                   |                   |                   |                   |                   |                   |                   |
|--------------|---------------------------------|-------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
|              |                                 | 2000                          | 2010 <sup>4</sup> | 2015 <sup>4</sup> | 2020 <sup>4</sup> | 2030 <sup>4</sup> | 2040 <sup>4</sup> | 2050 <sup>4</sup> | 2060 <sup>4</sup> |
| N            | 20-30<br>(32-48) <sup>(2)</sup> | 7,848                         | 8,414             | 8,746             | 9,091             | 9,822             | 10,696            | 11,646            | 12,694            |
| NNE          |                                 | 6,479                         | 6,999             | 7,286             | 7,584             | 8,235             | 8,887             | 9,604             | 10,452            |
| NE           |                                 | 8,948                         | 9,664             | 10,058            | 10,469            | 11,364            | 12,260            | 13,244            | 14,408            |
| ENE          |                                 | 17,492                        | 19,274            | 20,168            | 21,103            | 23,235            | 25,622            | 28,183            | 30,967            |
| E            |                                 | 468                           | 519               | 544               | 571               | 632               | 702               | 777               | 856               |
| ESE          |                                 | 594                           | 659               | 691               | 725               | 802               | 891               | 986               | 1,087             |
| SE           |                                 | 0                             | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 |
| SSE          |                                 | 795                           | 1,026             | 1,171             | 1,336             | 1,725             | 2,234             | 2,894             | 3,744             |
| S            |                                 | 2,277                         | 2,860             | 3,223             | 3,632             | 4,588             | 5,831             | 7,421             | 9,455             |
| SSW          |                                 | 4,340                         | 4,631             | 4,761             | 4,894             | 5,209             | 5,584             | 5,980             | 6,404             |
| SW           |                                 | 2,985                         | 3,251             | 3,387             | 3,528             | 3,869             | 4,292             | 4,787             | 5,373             |
| WSW          |                                 | 4,213                         | 5,389             | 6,106             | 6,918             | 8,869             | 11,360            | 14,584            | 18,682            |
| W            |                                 | 8,962                         | 11,400            | 12,854            | 14,494            | 18,484            | 23,497            | 29,971            | 38,115            |
| WNW          |                                 | 54,835                        | 69,512            | 78,206            | 87,987            | 111,884           | 141,745           | 180,272           | 228,561           |
| NW           |                                 | 19,014                        | 20,931            | 22,017            | 23,160            | 25,745            | 28,711            | 31,992            | 35,938            |
| NNW          |                                 | 22,756                        | 24,568            | 25,626            | 26,730            | 29,035            | 31,689            | 34,585            | 37,709            |
| <b>Total</b> |                                 | <b>162,006</b>                | <b>189,097</b>    | <b>204,844</b>    | <b>222,222</b>    | <b>263,498</b>    | <b>314,001</b>    | <b>376,926</b>    | <b>454,445</b>    |

**Table 2.5-10—{Population Projections by Sector and Distance from the CCNPP Site  
from 2000 to 2060}**

(Page 10 of 12)

| Sector       | Radius in mi<br>(km)            | Population Projection by Year |                   |                   |                   |                   |                   |                   |                   |
|--------------|---------------------------------|-------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
|              |                                 | 2000                          | 2010 <sup>4</sup> | 2015 <sup>4</sup> | 2020 <sup>4</sup> | 2030 <sup>4</sup> | 2040 <sup>4</sup> | 2050 <sup>4</sup> | 2060 <sup>4</sup> |
| N            | 30-40<br>(48-64) <sup>(2)</sup> | 91,036                        | 98,765            | 103,280           | 108,001           | 118,229           | 130,560           | 144,281           | 159,789           |
| NNE          |                                 | 13,477                        | 15,593            | 16,792            | 18,083            | 21,027            | 24,531            | 28,647            | 33,593            |
| NE           |                                 | 19,513                        | 21,950            | 23,347            | 24,832            | 28,284            | 32,112            | 36,698            | 42,237            |
| ENE          |                                 | 9,015                         | 10,195            | 10,810            | 11,463            | 12,997            | 14,779            | 16,808            | 19,103            |
| E            |                                 | 4,739                         | 5,349             | 5,660             | 5,989             | 6,754             | 7,613             | 8,579             | 9,651             |
| ESE          |                                 | 3,635                         | 4,039             | 4,245             | 4,462             | 4,976             | 5,510             | 6,136             | 6,836             |
| SE           |                                 | 1,030                         | 1,112             | 1,153             | 1,195             | 1,298             | 1,391             | 1,504             | 1,627             |
| SSE          |                                 | 1,136                         | 1,311             | 1,411             | 1,519             | 1,749             | 2,031             | 2,346             | 2,716             |
| S            |                                 | 5,420                         | 6,277             | 6,765             | 7,291             | 8,412             | 9,795             | 11,339            | 13,146            |
| SSW          |                                 | 8,751                         | 9,717             | 10,221            | 10,751            | 11,883            | 13,202            | 14,664            | 16,292            |
| SW           |                                 | 3,412                         | 3,706             | 3,850             | 3,999             | 4,321             | 4,691             | 5,095             | 5,526             |
| WSW          |                                 | 13,953                        | 15,980            | 17,096            | 18,289            | 21,154            | 24,577            | 28,771            | 33,733            |
| W            |                                 | 8,346                         | 10,498            | 11,765            | 13,184            | 16,628            | 20,889            | 26,359            | 33,154            |
| WNW          |                                 | 67,423                        | 82,146            | 90,843            | 100,460           | 123,836           | 152,757           | 189,489           | 235,309           |
| NW           |                                 | 272,660                       | 294,683           | 306,823           | 319,463           | 347,029           | 377,382           | 407,855           | 443,811           |
| NNW          |                                 | 95,361                        | 101,698           | 105,280           | 108,988           | 116,801           | 125,568           | 134,335           | 144,147           |
| <b>Total</b> |                                 | <b>618,907</b>                | <b>683,019</b>    | <b>719,341</b>    | <b>757,969</b>    | <b>845,378</b>    | <b>947,388</b>    | <b>1,062,906</b>  | <b>1,200,670</b>  |

**Table 2.5-10—{Population Projections by Sector and Distance from the CCNPP Site  
from 2000 to 2060}**

(Page 11 of 12)

| Sector       | Radius in mi<br>(km)            | Population Projection by Year |                   |                   |                   |                   |                   |                   |                   |
|--------------|---------------------------------|-------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
|              |                                 | 2000                          | 2010 <sup>4</sup> | 2015 <sup>4</sup> | 2020 <sup>4</sup> | 2030 <sup>4</sup> | 2040 <sup>4</sup> | 2050 <sup>4</sup> | 2060 <sup>4</sup> |
| N            | 40-50<br>(64-80) <sup>(2)</sup> | 144,479                       | 152,144           | 156,673           | 161,336           | 170,665           | 181,605           | 192,737           | 204,117           |
| NNE          |                                 | 9,394                         | 11,103            | 12,075            | 13,132            | 15,537            | 18,485            | 21,978            | 26,148            |
| NE           |                                 | 14,160                        | 17,055            | 18,735            | 20,580            | 24,967            | 30,142            | 36,545            | 44,327            |
| ENE          |                                 | 29,169                        | 32,359            | 34,084            | 35,902            | 39,982            | 44,729            | 50,401            | 56,868            |
| E            |                                 | 77,460                        | 86,067            | 90,484            | 95,128            | 105,554           | 117,211           | 130,550           | 145,254           |
| ESE          |                                 | 15,217                        | 16,596            | 17,291            | 18,015            | 19,759            | 21,432            | 23,439            | 25,649            |
| SE           |                                 | 7,158                         | 7,731             | 8,012             | 8,303             | 9,019             | 9,663             | 10,451            | 11,310            |
| SSE          |                                 | 1,855                         | 2,107             | 2,251             | 2,405             | 2,735             | 3,133             | 3,576             | 4,092             |
| S            |                                 | 7,210                         | 7,750             | 8,055             | 8,371             | 9,047             | 9,860             | 10,757            | 11,791            |
| SSW          |                                 | 6,820                         | 7,385             | 7,674             | 7,975             | 8,591             | 9,288             | 10,070            | 10,900            |
| SW           |                                 | 5,020                         | 5,411             | 5,615             | 5,826             | 6,249             | 6,734             | 7,278             | 7,846             |
| WSW          |                                 | 7,842                         | 9,149             | 9,905             | 10,723            | 12,591            | 14,762            | 17,436            | 20,567            |
| W            |                                 | 25,052                        | 32,333            | 36,730            | 41,725            | 54,144            | 70,218            | 91,446            | 119,070           |
| WNW          |                                 | 346,300                       | 413,692           | 452,271           | 494,447           | 592,558           | 713,399           | 861,497           | 1,039,292         |
| NW           |                                 | 1,285,806                     | 1,329,573         | 1,358,864         | 1,388,801         | 1,464,824         | 1,550,056         | 1,655,956         | 1,777,719         |
| NNW          |                                 | 284,819                       | 303,507           | 314,091           | 325,045           | 348,063           | 373,932           | 399,804           | 428,637           |
| <b>Total</b> |                                 | <b>2,267,761</b>              | <b>2,433,962</b>  | <b>2,532,810</b>  | <b>2,637,714</b>  | <b>2,884,285</b>  | <b>3,174,649</b>  | <b>3,523,921</b>  | <b>3,933,587</b>  |

**Table 2.5-10—{Population Projections by Sector and Distance from the CCNPP Site  
from 2000 to 2060}**

(Page 12 of 12)

| Sector       | Radius in mi<br>(km)          | Population Projection by Year |                   |                   |                   |                   |                   |                   |                   |
|--------------|-------------------------------|-------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
|              |                               | 2000                          | 2010 <sup>4</sup> | 2015 <sup>4</sup> | 2020 <sup>4</sup> | 2030 <sup>4</sup> | 2040 <sup>4</sup> | 2050 <sup>4</sup> | 2060 <sup>4</sup> |
| N            | 0-50<br>(0-80) <sup>(3)</sup> | 243,363                       | 259,323           | 268,699           | 278,428           | 298,716           | 322,861           | 348,664           | 376,600           |
| NNE          |                               | 29,753                        | 34,131            | 36,607            | 39,271            | 45,312            | 52,456            | 60,827            | 70,844            |
| NE           |                               | 43,642                        | 49,802            | 53,328            | 57,126            | 65,993            | 76,046            | 88,182            | 102,841           |
| ENE          |                               | 57,950                        | 64,352            | 67,708            | 71,242            | 79,284            | 88,541            | 99,167            | 111,099           |
| E            |                               | 82,938                        | 92,236            | 97,004            | 102,019           | 113,306           | 125,933           | 140,356           | 156,257           |
| ESE          |                               | 20,155                        | 22,081            | 23,052            | 24,067            | 26,494            | 28,897            | 31,738            | 34,869            |
| SE           |                               | 8,842                         | 9,587             | 9,960             | 10,347            | 11,285            | 12,158            | 13,215            | 14,369            |
| SSE          |                               | 13,176                        | 15,466            | 16,824            | 18,309            | 21,600            | 25,607            | 30,458            | 36,246            |
| S            |                               | 46,382                        | 56,210            | 62,229            | 68,971            | 84,494            | 104,327           | 129,360           | 160,869           |
| SSW          |                               | 43,437                        | 51,797            | 56,814            | 62,432            | 75,435            | 92,050            | 113,078           | 139,569           |
| SW           |                               | 23,320                        | 27,646            | 30,246            | 33,157            | 39,915            | 48,585            | 59,601            | 73,497            |
| WSW          |                               | 37,958                        | 45,623            | 50,175            | 55,226            | 67,120            | 81,940            | 100,704           | 123,967           |
| W            |                               | 56,668                        | 72,319            | 81,790            | 92,515            | 118,611           | 152,030           | 195,594           | 251,422           |
| WNW          |                               | 483,843                       | 583,872           | 641,780           | 705,498           | 855,908           | 1,041,757         | 1,272,963         | 1,554,551         |
| NW           |                               | 1,594,665                     | 1,664,753         | 1,708,641         | 1,753,828         | 1,863,160         | 1,985,329         | 2,129,180         | 2,295,532         |
| NNW          |                               | 424,178                       | 454,201           | 471,266           | 489,013           | 526,397           | 568,571           | 611,840           | 659,979           |
| <b>Total</b> |                               | <b>3,210,270</b>              | <b>3,503,399</b>  | <b>3,676,123</b>  | <b>3,861,449</b>  | <b>4,293,030</b>  | <b>4,807,088</b>  | <b>5,424,927</b>  | <b>6,162,511</b>  |

Notes: A dash indicates that the sector covers a body of water only

<sup>(1)</sup> Includes transient and resident populations

<sup>(2)</sup> Resident population only

<sup>(3)</sup> Transients included only for 0 to 10 mi (0 to 16 km) portion.

<sup>(4)</sup> The populations for years 2010 through 2060 have been projected by calculating a growth rate using state population projections (by county) as the base.

**Table 2.5-11—{Counties of Residence of the Existing Operational Workforce  
at CCNPP Units 1 and 2, November 2006}**

(Page 1 of 1)

| County/Location of Residence | CCNPP Units 1 & 2 O&M Workforce |         |
|------------------------------|---------------------------------|---------|
|                              | Number                          | Percent |
| Alleghany                    | 1                               | 0.1%    |
| Anne Arundel                 | 27                              | 3.2     |
| Baltimore                    | 4                               | 0.5     |
| Calvert                      | 562                             | 67.5    |
| Charles                      | 30                              | 3.6     |
| Howard                       | 2                               | 0.2     |
| Prince Georges               | 6                               | 0.7     |
| St. Mary's                   | 198                             | 23.8    |
| Washington                   | 1                               | 0.1     |
| Out of State                 | 2                               | 0.2     |
| Totals                       | 833                             | 99.9%   |
| ROI Totals                   | 760                             | 91.3    |

Note:

The total percentage does not equal 100.0% due to rounding.

**Table 2.5-12—{Civilian Labor Force Data for Calvert County  
and St. Mary's County, October 2006}**

(Page 1 of 1)

| County/Location                            | Individuals in Labor Force | Individuals Employed | Individuals Unemployed | Unemployment Rate, Percent |
|--|----------------------------|----------------------|------------------------|----------------------------|
| Calvert County                             | 47,247                     | 45,971               | 1,276                  | 2.7%                       |
| St. Mary's County                          | 50,375                     | 48,793               | 1,582                  | 3.1                        |
| Washington-Arlington-Alexandria Metro Area | 583,647                    | 560,958              | 22,689                 | 3.9                        |
| State of Maryland                          | 3,030,037                  | 2,918,627            | 111,410                | 3.7                        |
| U.S.                                       | 151,998,000                | 145,287,000          | 6,711,000              | 4.4                        |

**Notes:**

The Washington DC MSA includes the District of Columbia and parts of the states of Maryland (Calvert, Charles, Frederick, Montgomery, and Prince George's counties), Virginia (Arlington, Clarke, Culpeper, Fairfax, Fauquier, King George, Loudoun, Prince William, Spotsylvania, Stafford, and Warren counties and the cities of Alexandria, Fairfax, Fall Church, Manassas, and Manassas Park), and West Virginia (Berkeley and Jefferson counties.) The civilian labor force does not include employees of the Patuxent Naval Air Station in St. Mary's County; unemployment rates are only determined for civilian labor forces.

**Table 2.5-13—{Construction and Extraction Occupational Labor Force,  
Washington-Arlington-Alexandria Metro Area, May 2005}**

(Page 1 of 3)

| Construction and Extraction Occupations |   |            |                |             |                 |              |
|---|---|------------|----------------|-------------|-----------------|--------------|
| Occupation Code                         | Occupation Title  | Employment | Wage Estimates |             |                 |              |
|   |   |            | Median Hourly  | Mean Hourly | Mean Annual (1) | Mean RSE (2) |
| 47-0000                                 | Construction and Extraction Occupations                                       | 108,860    | \$17.50        | \$19.04     | \$39,610        | 0.9 %        |
| 47-1011                                 | First-Line Supervisors/Managers of Construction Trades and Extraction Workers | 12,480     | \$27.17        | \$28.74     | \$59,790        | 1.8 %        |
| 47-2011                                 | Boilermakers  | 150        | \$23.10        | \$23.20     | \$48,270        | 6.9 %        |
| 47-2021                                 | Brick masons and Block masons   | 2,380      | \$21.16        | \$20.75     | \$43,160        | 2.5 %        |
| 47-2022                                 | Stonemasons   | (3)        | \$21.51        | \$22.46     | \$46,720        | 6.8 %        |
| 47-2031                                 | Carpenters  | 14,420     | \$18.81        | \$19.84     | \$41,260        | 1.9 %        |
| 47-2041                                 | Carpet Installers   | (3)        | \$13.69        | \$15.78     | \$32,830        | 13.5 %       |
| 47-2042                                 | Floor Layers, Except Carpet, Wood, and Hard Tiles                             | 50         | \$15.72        | \$15.96     | \$33,190        | 3.8 %        |
| 47-2043                                 | Floor Sanders and Finishers   | 160        | \$12.07        | \$13.05     | \$27,150        | 2.9 %        |
| 47-2044                                 | Tile and Marble Setters   | 1,050      | \$18.03        | \$18.50     | \$38,490        | 5.2 %        |
| 47-2051                                 | Cement Masons and Concrete Finishers  | 4,220      | \$16.08        | \$16.21     | \$33,720        | 2.9 %        |
| 47-2053                                 | Terrazzo Workers and Finishers  | (3)        | \$15.73        | \$15.89     | \$33,050        | 3.0 %        |
| 47-2061                                 | Construction Laborers   | 18,460     | \$12.68        | \$13.07     | \$27,180        | 1.7 %        |
| 47-2071                                 | Paving, Surfacing, and Tamping Equipment Operators                            | 490        | \$13.77        | \$14.59     | \$30,350        | 2.6 %        |
| 47-2072                                 | Pile-Driver Operators   | 90         | \$19.41        | \$19.39     | \$40,340        | 7.4%         |
| 47-2073                                 | Operating Engineers and Other Construction Equipment Operators                | 5,160      | \$18.69        | \$18.57     | \$38,620        | 1.0 %        |
| 47-2081                                 | Drywall and Ceiling Tile Installers   | 2,040      | \$16.34        | \$17.02     | \$35,400        | 3.1 %        |

**Table 2.5-13—{Construction and Extraction Occupational Labor Force,  
Washington-Arlington-Alexandria Metro Area, May 2005}**

(Page 2 of 3)

| Construction and Extraction Occupations |   |            |                |             |                 |              |
|---|---|------------|----------------|-------------|-----------------|--------------|
| Occupation Code                         | Occupation Title  | Employment | Wage Estimates |             |                 |              |
|   |   |            | Median Hourly  | Mean Hourly | Mean Annual (1) | Mean RSE (2) |
| 47-2082                                 | Tapers  | 250        | \$15.94        | \$16.14     | \$33,570        | 1.8 %        |
| 47-2111                                 | Electricians  | 11,040     | \$22.97        | \$23.27     | \$48,390        | 2.0 %        |
| 47-2121                                 | Glaziers  | 800        | \$18.77        | \$18.49     | \$38,460        | 4.6 %        |
| 47-2131                                 | Insulation Workers, Floor, Ceiling, and Wall                                  | 710        | \$16.57        | \$17.63     | \$36,680        | 9.2 %        |
| 47-2132                                 | Insulation Workers, Mechanical  | 370        | \$17.78        | \$19.80     | \$41,190        | 13.7 %       |
| 47-2141                                 | Painters, Construction and Maintenance  | 4,530      | \$16.19        | \$17.19     | \$35,750        | 3.3 %        |
| 47-2142                                 | Paperhangers  | 30         | \$19.49        | \$19.10     | \$39,720        | 3.2 %        |
| 47-2151                                 | Pipe layers   | 1,860      | \$15.63        | \$15.86     | \$32,990        | 2.8 %        |
| 47-2152                                 | Plumbers, Pipe fitters, and Steamfitters                                      | 6,200      | \$20.77        | \$21.89     | \$45,520        | 2.3 %        |
| 47-2161                                 | Plasterers and Stucco Masons  | 40         | \$19.82        | \$19.34     | \$40,220        | 3.9 %        |
| 47-2171                                 | Reinforcing Iron and Rebar Workers  | 540        | \$19.18        | \$18.70     | \$38,900        | 2.9 %        |
| 47-2181                                 | Roofers   | 1,460      | \$15.59        | \$16.81     | \$34,960        | 4.0 %        |
| 47-2211                                 | Sheet Metal Workers   | 4,180      | \$17.96        | \$19.73     | \$41,040        | 4.0 %        |
| 47-2221                                 | Structural Iron and Steel Workers   | 500        | \$18.08        | \$18.62     | \$38,730        | 2.6 %        |
| 47-3011                                 | Helpers--Brick masons, Block masons, Stonemasons, and Tile and Marble Setters | 1,750      | \$12.36        | \$12.80     | \$26,620        | 2.4 %        |
| 47-3012                                 | Helpers--Carpenters   | 1,890      | \$11.61        | \$11.88     | \$24,700        | 2.3 %        |
| 47-3013                                 | Helpers--Electricians   | 3,230      | \$13.19        | \$13.51     | \$28,090        | 3.1 %        |
| 47-3014                                 | Helpers--Painters, Paperhangers, Plasterers, and Stucco Masons                | (3)        | \$8.11         | \$9.58      | \$19,930        | 13.3 %       |



**Table 2.5-13—{Construction and Extraction Occupational Labor Force,  
Washington-Arlington-Alexandria Metro Area, May 2005}**

(Page 3 of 3)

| Construction and Extraction Occupations  |   |            |                |             |                 |              |
|--|---|------------|----------------|-------------|-----------------|--------------|
| Occupation Code  | Occupation Title  | Employment | Wage Estimates |             |                 |              |
|  |   |            | Median Hourly  | Mean Hourly | Mean Annual (1) | Mean RSE (2) |
| 47-3015  | Helpers—Pipe layers, Plumbers, Pipe fitters, and Steamfitters | 1,310      | \$12.56        | \$12.61     | \$26,240        | 2.9 %        |
| 47-3016  | Helpers--Roofers  | 440        | \$11.93        | \$12.10     | \$25,160        | 2.9 %        |
| 47-3019  | Helpers, Construction Trades, All Other                       | 530        | \$14.94        | \$15.54     | \$32,320        | 2.6 %        |
| 47-4011  | Construction and Building Inspectors                          | 2,030      | \$23.94        | \$24.34     | \$50,620        | 2.1 %        |
| 47-4021  | Elevator Installers and Repairers                             | 340        | \$30.95        | \$29.90     | \$62,200        | 2.3 %        |
| 47-4031  | Fence Erectors  | (3)        | \$11.82        | \$12.56     | \$26,130        | 5.8 %        |
| 47-4041  | Hazardous Materials Removal Workers                           | 350        | \$14.11        | \$15.14     | \$31,500        | 3.7 %        |
| 47-4051  | Highway Maintenance Workers                                   | 740        | \$16.28        | \$16.47     | \$34,260        | 3.1 %        |
| 47-4071  | Septic Tank Servicers and Sewer Pipe Cleaners                 | (3)        | \$13.74        | \$17.13     | \$35,630        | 19.0 %       |
| 47-4099  | Construction and Related Workers, All Other                   | 560        | \$15.10        | \$15.70     | \$32,650        | 3.0 %        |
| 47-5021  | Earth Drillers, Except Oil and Gas                            | (3)        | \$17.45        | \$18.65     | \$38,790        | 7.7 %        |
| 47-5031  | Explosives Workers, Ordnance Handling Experts, and Blasters   | 200        | \$20.56        | \$20.87     | \$43,410        | 15.1 %       |
| 47-5081  | Helpers--Extraction Workers                                   | (3)        | \$12.46        | \$12.36     | \$25,700        | 3.1 %        |
| 47-5099  | Extraction Workers, All Other                                 | (3)        | \$12.89        | \$13.81     | \$28,720        | 3.6 %        |
| <p>Notes:</p> <p>(1) Annual wages have been calculated by multiplying the hourly mean wage by a "year-round, full-time" hour's figure of 2,080 hours; for those occupations where there is not an hourly mean wage published, the annual wage has been directly calculated from the reported survey data.</p> <p>(2) The relative standard error (RSE) is a measure of the reliability of a survey statistic. The smaller the relative standard error, the more precise the estimate.</p> <p>(3) Estimates not released.</p> |   |            |                |             |                 |              |

**Table 2.5-14—{Employment by Sectors and Industry in Calvert County  
St. Mary's County, and ROI, 2005}**  
(Page 1 of 1)

| Sector/Industry                                | Employment     |                   |        |
|--|----------------|-------------------|--------|
|  | Calvert County | St. Mary's County | ROI    |
| Total Government and Private Sector Employment | 20,810         | 37,591            | 58,401 |
| Government Total:                              | 3,796          | 11,092            | 14,888 |
| Federal  | 139            | 6,858             | 6,997  |
| State  | 224            | 778               | 1,002  |
| Local  | 3,433          | 3,456             | 6,889  |
| Private Sector Total:                          | 17,014         | 26,499            | 43,513 |
| Natural Resources & Mining                     | 18             | 29                | 47     |
| Construction                                   | 2,300          | 1,860             | 4,160  |
| Manufacturing                                  | 725            | 487               | 1,212  |
| Trade, Transportation, Utilities               | 4,704          | 6,458             | 11,162 |
| Information                                    | 316            | 226               | 542    |
| Financial Activities                           | 756            | 942               | 1,698  |
| Professional and Business Services             | 1,599          | 8,655             | 10,254 |
| Educational and Health Services                | 2,979          | 3,742             | 6,721  |
| Leisure and Hospitality                        | 2,849          | 3,224             | 6,073  |
| Other Services                                 | 768            | 876               | 1,644  |
| Unclassified                                   | 0              | 0                 | 0      |

**Note:**

This table provides employment levels, by industry, for people working in Calvert County and St. Mary's County only. Total employment levels are less than those provided in Table 2.5.2-2, which displays totals for all people living in each county, even if they are working in other counties. The large difference in the totals in these tables shows how many people are commuting outside of the ROI to work.

**Table 2.5-15—{Major Non-Governmental Employers in Calvert County  
and St. Mary's County, 2005}**

(Page 1 of 1)

| <b>Calvert County</b>              |                                |                   |
|------------------------------------|--------------------------------|-------------------|
| <b>Firm</b>                        | <b>Product/Service</b>         | <b>Employment</b> |
| Calvert Memorial Hospital          | Medical Services               | 915               |
| Constellation Energy/CCNPP         | Nuclear power generation       | 833               |
| ARC of Southern Maryland           | Medical and Social Services    | 375               |
| Wal-Mart                           | Consumer goods                 | 310               |
| DynCorp                            | Tech services                  | 296               |
| Recorded Books                     | Audio books                    | 291               |
| DM Group                           | Printing, fulfillment services | 250               |
| All American Ambulance & Transport | Ambulance services             | 240               |
| Calvert Nursing Center             | Medical services               | 203               |
| The Gott Company                   | Fuel, A/C, heating services    | 200               |
| Safeway                            | Groceries                      | 175               |
| Holiday Inn Select                 | Lodgings                       | 171               |
| Chesapeake Biological Laboratory   | Fisheries research             | 168               |

**Table 2.5-16—{Fastest Growing Private Industries in Calvert County  
and St. Mary's County, from 2004 to 2005}**

(Page 1 of 1)

| <b>St. Mary's County</b>       |                                |                   |
|--------------------------------|--------------------------------|-------------------|
| <b>Firm</b>                    | <b>Product/Service</b>         | <b>Employment</b> |
| Patuxent NAS                   | Military Installation          | 10,500            |
| DynCorp/CSC                    | Professional and Tech services | 1,500             |
| EMA                            | Engineering, science services  | 1,000             |
| St Mary's Hospital             | Medical services               | 900               |
| BAE Systems                    | Tech products & services       | 854               |
| Veridian                       | Aeronautics, R D T and E       | 700               |
| Information Spectrum           | Professional & tech services   | 450               |
| Northrop Grumman               | Systems and software design    | 450               |
| St Mary's College of Maryland  | Higher Education               | 400               |
| Food Lion                      | Groceries                      | 344               |
| Target                         | Consumer goods                 | 319               |
| Booz Allen Hamilton            | Systems engineer and mgt       | 315               |
| Sabre                          | Engineering services           | 300               |
| Burch Oil                      | Gas and oil                    | 280               |
| Charlotte Hall Vet's Home      | Nursing home, Asst living      | 280               |
| Wal-Mart                       | Consumer goods                 | 280               |
| Mantech International          | Systems and software dev       | 260               |
| J F Taylor                     | Technology simulations         | 210               |
| Lundeberg School of Seamanship | Seamanship training            | 210               |
| Eagle Systems                  | Systems engineering and mgt    | 200               |
| National Technology Assoc      | Systems engineering and mgt    | 200               |
| Lowe's                         | Home improvement products      | 193               |
| DCS                            | Technology simulation          | 175               |
| Merkle Mailing Services        | Data Entry and fulfillment     | 145               |

**Table 2.5-17—{Percent of Individuals in Poverty and Median Household Income in Calvert County and St. Mary's County, Maryland, and the U.S. 2000 and 2005}**

(Page 1 of 1)

| County/Industry                              | Fastest Growing Private Industries 2004 – 2005, Percent Increase |
|--|--|
| <b>Calvert County:</b>                       |  |
| Credit intermediation and related activities | 32.3%  |
| Merchant wholesalers, durable goods          | 17.4   |
| General merchandise stores                   | 12.4   |
| Transit and ground passenger transportation  | 10.8   |
| Miscellaneous store retailers                | 9.0  |
| Health and personal care stores              | 8.9  |
| Waste management & remediation services      | 7.9  |
| <b>St. Mary's County:</b>                    |  |
| Transit and ground passenger transportation  | 11.7%  |
| Miscellaneous store retailers                | 11.6   |
| Nursing and residential care facilities      | 11.0   |
| Real estate                                  | 9.1  |
| Admin and support services                   | 6.9  |
| Personal and laundry services                | 6.7  |
| Merchant wholesalers, durable goods          | 4.5  |

**Table 2.5-18—{Mean Salaries in Calvert County, St. Mary's County  
Maryland, and the U.S. 2005}**

(Page 1 of 1)

| County/Location   | Percent of<br>Individuals Below<br>the Poverty Level,<br>2005 | Median Household Income |          |  |
|-------------------|---|-------------------------|----------|--|
|                   |   | 2000                    | 2005     | Average Annual<br>Percent Change,<br>2000-2005 |
| Calvert County    | 5.5   | \$65,945                | \$84,388 | 5.6  |
| St. Mary's County | 9.0   | \$54,706                | \$62,939 | 3.0  |
| State of Maryland | 8.2   | \$52,868                | \$61,592 | 3.3  |
| U.S.              | 13.2  | \$41,994                | \$46,242 | 2.0  |

**Table 2.5-19—{Occupied Housing Units and Vacant (available) Housing Units in Calvert County, St. Mary's County, and the ROI, 2000}**

(Page 1 of 1)

| County/Location              | Mean Earnings, 2005 | Percent Greater Than The National Average |
|------------------------------|---------------------|---|
| Calvert County               | \$95,403            | 49.5%                                     |
| St. Mary's County            | \$74,825            | 17.2                                      |
| State of Maryland            | \$79,644            | 24.8                                      |
| U.S.                         | \$63,834            | NA  |
| Note:<br>N/A = not available |                     |   |

**Table 2.5-20—{New Housing Units (Single-family and Multi-family)  
Authorized for Construction, Calvert County and St Mary's County  
from 2001 to 2005}**

(Page 1 of 1)

| Housing Type   | County  |            | Total ROI |
|--|---------|------------|-----------|
|  | Calvert | St. Mary's |           |
| Total Housing Units:   | 27,576  | 34,081     | 61,657    |
| Total Occupied Units:  | 25,447  | 30,642     | 56,089    |
| Owner Occupied   | 21,679  | 21,996     | 43,675    |
| Renter Occupied  | 3,768   | 8,646      | 12,414    |
| Total Unoccupied Units:                                      | 2,129   | 3,439      | 5,568     |
| Year-around Units  | 1,125   | 2,223      | 3,348     |
| Seasonal, recreational, or occasional use units              | 1,004   | 1,216      | 2,220     |
| Percentage of Unoccupied Units (versus total housing units): | 7.7%    | 10.1%      | 9.0%      |



**Table 2.5-21—{Apartment and Townhouse Complexes in  
Calvert County and St. Mary's County}**

(Page 1 of 2)

| County/Area       | Total Existing Units, 2000 | Number of Authorized New Housing Units by Year |       |       |       |       |  |
|-------------------|----------------------------|--|-------|-------|-------|-------|--|
|                   |                            | 2001   | 2002  | 2003  | 2004  | 2005  |  |
| Calvert County    | 27,576                     | 886  | 928   | 791   | 525   | 488   |  |
| St. Mary's County | 34,081                     | 549  | 914   | 1,094 | 1,384 | 993   |  |
| Total ROI         | 61,657                     | 1,435  | 1,842 | 1,885 | 1,909 | 1,481 |  |

| Complex                             | Location         | Number of Bedrooms | Length of Leases      |
|-------------------------------------|------------------|--------------------|-----------------------|
| <b>Calvert County:</b>              |                  |                    |                       |
| Solomons Landing Condominiums       | Solomons         | N/A                | N/A                   |
| Calvertown Townhouses               | Prince Frederick | N/A                | N/A                   |
| Silverwood Farm Apartments          | Prince Frederick | 1 – 3              | 6 or 12 months        |
| Courtyards at Fishing Creek         | Chesapeake Beach | N/A                | N/A                   |
| Towne Center Apartments             | North Beach      | N/A                | N/A                   |
| Subtotals                           | 5 complexes      | N/A                | N/A                   |
| <b>St. Mary's County:</b>           |                  |                    |                       |
| Abberly Court                       | Lexington Park   | 1-3                | 12 or 13 months       |
| Cherry Cove Manufactured Housing    | Lexington Park   | N/A                | N/A                   |
| Cook Management Corporation         | Lexington Park   | N/A                | N/A                   |
| Garrett Park                        | Lexington Park   | N/A                | N/A                   |
| Greens at Hilton Run                | Lexington Park   | 1-3                | 6, 7, 9, or 12 months |
| Indian Bridge Apartments            | Lexington Park   | N/A                | N/A                   |
| Joe Baker Village                   | Lexington Park   | N/A                | N/A                   |
| Lexington Village Apartments        | Lexington Park   | N/A                | N/A                   |
| Mayfaire Apartments                 | Lexington Park   | N/A                | N/A                   |
| Lex-Woods Apartments                | Lexington Park   | N/A                | N/A                   |
| Lord Calvert Manufactured Home Park | Lexington Park   | N/A                | N/A                   |
| Queen Anne Park Apartments          | Lexington Park   | 1 – 3              | 1, 3, 6 or 12 months  |
| St. Mary's Landing                  | Lexington Park   | Efficiency – 3     | 3, 6, or 12 months    |
| Spring Valley Apartments            | Lexington Park   | N/A                | N/A                   |
| Spyglass at Cedar Cove              | Lexington Park   | 1-2                | 12 or 13 months       |
| Sunset Hall                         | Lexington Park   | N/A                | N/A                   |
| Valley Drive Estates                | Lexington Park   | N/A                | N/A                   |

**Table 2.5-21—{Apartment and Townhouse Complexes in  
Calvert County and St. Mary's County}**

(Page 2 of 2)

| <b>Complex</b>                   | <b>Location</b>     | <b>Number of<br/>Bedrooms</b> | <b>Length of Leases</b> |
|----------------------------------|---------------------|-------------------------------|-------------------------|
| Villas at Greenview (townhouses) | Lexington Park      | 2-3                           | 12 months               |
| Apartments of Wildewood          | California          | 1 – 2                         | 6 or 12 months          |
| Chancellors Run Apartments       | Great Mills         | N/A                           | N/A                     |
| Foxchase Village                 | Great Mills         | 2                             | 1 month                 |
| Greenview Village Townhomes      | Great Mills         | 2 – 3                         | 1 month                 |
| Hickory Hills Townhomes          | Great Mills         | Studio - 3                    | 1, 3, 6 or 12 months    |
| Hunting Meadows Apartments       | Callaway            | N/A                           | N/A                     |
| Breton Bay                       | Leonardtown         | N/A                           | N/A                     |
| Cedar Lane Apartments            | Leonardtown         | N/A                           | N/A                     |
| Leonardtown Village Apartments   | Leonardtown         | N/A                           | N/A                     |
| New Towne Village                | Leonardtown         | N/A                           | N/A                     |
| Subtotals                        | 28 complexes        | N/A                           | N/A                     |
| <b>Totals</b>                    | <b>33 complexes</b> | <b>N/A</b>                    | <b>N/A</b>              |

Note:

N/A = not available

**Table 2.5-22—{Hotels, Motels, and Bed & Breakfasts Within About 30 Miles (48.2 km) of Lusby, Maryland}**

(Page 1 of 2)

| Hotel/Motel, Bed and Breakfast                                    | Location or Area | Distance from Lusby (mi) | Number of Units | Occupancy Constraints   |                                       |
|---|------------------|--------------------------|-----------------|-------------------------|---------------------------------------|
|   |                  |                          |                 | 50-79 Percent Occupancy | 80 Percent or More Occupancy          |
| Calvert County:   |                  |                          |                 |                         |                                       |
| Holiday Inn Select Solomons Hotel                                 | Solomons         | 5.1                      | 326             | Dec – Feb               | March – Nov                           |
| Cliffs Motor Inn  | St. Leonard      | 6.3                      | N/A             | N/A                     | N/A                                   |
| Comfort Inn - Beacon Marina                                       | Solomons         | 6.7                      | 60              | N/A                     | N/A                                   |
| Holiday Inn Express Prince Frederick                              | Prince Frederick | 11.0                     | 70              | All year                | --                                    |
| Super 8 Motel   | Prince Frederick | 13.1                     | 57              | N/A                     | N/A                                   |
| Comfort Suites  | Prince Frederick |                          | 70              | Sept - Dec              | Jan – Aug                             |
| Chesapeake Beach Resort and Spa                                   | Chesapeake Beach | 19.7                     | 72              | N/A                     | N/A                                   |
| Herrington Harbour Marinas  | North Beach      | 31.3                     |                 | N/A                     | N/A                                   |
| Subtotals   | 8 facilities     |                          | 655             |                         |                                       |
| St. Mary's County:  |                  |                          |                 |                         |                                       |
| Sleep Inn & Suites Lexington Park/Solomons                        | Lexington Park   | 8.0                      | 81              | N/A                     | Monday – Wednesday; seasonal data N/A |
| Super 8 Motel   | Lexington Park   | 8.4                      | 61              | Sept – April            | May – Aug                             |
| Extended Stay America Lexington Park-Pax River                    | Lexington Park   | 9.0                      | 98              | Sept – Feb              | March – Aug                           |
| Hampton Inn Lexington Park  | Lexington Park   | 9.2                      | 111             | Thurs – Sat all year    | Monday – Wed all year                 |
| Fairfield Inn by Marriott Lexington Park – Patuxent Naval Station | Lexington Park   | 9.3                      | 78              | N/A                     | Monday – Wed all year                 |
| Days Inn  | Lexington Park   | 14.5                     | 165             | Sept – March            | April – Aug                           |
| Lore's Lodging  | Lexington Park   | 15.1                     | N/A             | N/A                     | N/A                                   |
| Patuxent Inn  | Lexington Park   | 15.1                     | 120             | Oct – Feb               | March – Sept                          |
| The Victorian Candle Bed & Breakfast                              | Hollywood        | 15.5                     | 8               | N/A                     | N/A                                   |
| Relax Inn   | Leonardtwn       | 17.3                     | N/A             | N/A                     | N/A                                   |
| Scheible's Motel  | Ridge            | 28.5                     | N/A             | N/A                     | N/A                                   |
| Bard's Field Bed & Breakfast                                      | Ridge            | 28.8                     |                 | N/A                     | N/A                                   |

**Table 2.5-22—{Hotels, Motels, and Bed & Breakfasts Within About 30 Miles (48.2 km) of Lusby, Maryland}**

(Page 2 of 2)

| Hotel/Motel, Bed and Breakfast         | Location or Area     | Distance from Lusby (mi) | Number of Units | Occupancy Constraints   |                              |
|--|----------------------|--------------------------|-----------------|-------------------------|------------------------------|
|  |                      |                          |                 | 50-79 Percent Occupancy | 80 Percent or More Occupancy |
| Woodlawn Bed & Breakfast               | Ridge                | 28.5                     | 5               | N/A                     | N/A                          |
| Brome-Howard Inn                       | St. Mary's City      | 22.5                     | 4               | N/A                     | N/A                          |
| Nekadesh Farm Bed & Breakfast          | Colton's Point       | 24.6                     | 2               | N/A                     | N/A                          |
| St. Michael's Manor Bed & Breakfast    | Scotland             | 28.3--                   | 4               | --                      | --                           |
| Subtotals                              | 16 facilities        |                          | 737             | N/A                     | N/A                          |
| <b>Charles County:</b>                 |                      |                          |                 |                         |                              |
| Comfort Suites Waldorf                 | Waldorf              | 28.7                     | 69              | N/A                     | N/A                          |
| La Quinta Inn Waldorf                  | Waldorf              | 28.7                     | 87              | Nov – Jan               | Feb - Oct                    |
| Holiday Inn                            | Waldorf              | 36.6                     | 191             | N/A                     | N/A                          |
| Country Inn & Suites                   | Waldorf              | 37.0                     | 66              | n/h                     | May – Oct                    |
| Sleep Inn                              | La Plata             | 38.3                     | 69              | N/A                     | N/A                          |
| Subtotals                              | 5 facilities         | --                       | 482             | --                      | --                           |
| <b>Prince Georges County:</b>          |                      |                          |                 |                         |                              |
| Colony South Hotel & Conference Center | Clinton              | 32.7                     | 195             | --                      | All year                     |
| Hampton Inn Easton                     | Easton               | 32.8                     | 74              | June – Nov              | n/h                          |
| Subtotals                              | 2 facilities         | N/A                      | 269             | N/A                     | N/A                          |
|  |                      |                          |                 |                         |                              |
| <b>Totals</b>                          | <b>28 facilities</b> | <b>--</b>                | <b>1,953</b>    | <b>N/A</b>              | <b>--</b>                    |

Notes:

N/A = not available

n/h = new hotel/motel, additional information is not available for the remainder of the year

Hotels, motels, and bed and breakfasts located within Dorchester County within the 30-linear mile radius of Lusby are excluded from this table because they are not on the peninsula and the actual driving miles would be too extensive for potential commuting to the CCNPP site.

**Table 2.5-23—{Public Schools Located in Calvert County  
and St. Mary's County}**  
(Page 1 of 2)

| Public School District / Schools                  | City or Location | Grades Taught | Number of Students | Students per FTE Teacher |
|---|------------------|---------------|--------------------|--------------------------|
| <b>Calvert County SD:</b>                         |                  |               |                    |                          |
| Appeal Elementary School                          | Lusby            | 3-5           | 424                | 15                       |
| Beach Elementary School                           | Chesapeake Beach | PK-5          | 529                | 17                       |
| Calvert Career Center                             | Prince Frederick |               |                    |                          |
| Calvert Country School                            | Prince Frederick | PK-12         | 76                 | 5                        |
| Calvert Elementary School                         | Prince Frederick | PK-5          | 633                | 16                       |
| Calvert Middle School                             | Prince Frederick | 6-8           | 503                | 15                       |
| Calvert High School                               | Prince Frederick | 9-12          | 1,168              | 16                       |
| Dowell Elementary School                          | Lusby            | PK-5          | 654                | 17                       |
| Huntingtown Elementary School                     | Huntingtown      | PK-5          | 717                | 17                       |
| Huntingtown High School                           | Huntingtown      | 9-12          | 1,404              | 19                       |
| Mill Creek Middle School                          | Lusby            | 6-8           | 680                | 16                       |
| Mt. Harmony Elementary School                     | Owings           | K-5           | 703                | 19                       |
| Mutual Elementary School                          | Port Republic    | PK-5          | 648                | 16                       |
| Northern Middle School                            | Owings           | 6-8           | 783                | 17                       |
| Northern High School                              | Owings           | 9-12          | 1,565              | 19                       |
| Patuxent Elementary School                        | Lusby            | PK-2          | 531                | 18                       |
| Patuxent High School                              | Lusby            | 9-12          | 1,490              | 20                       |
| Plum Point Elementary School                      | Huntingtown      | K-5           | 786                | 19                       |
| Plum Point Middle School                          | Huntingtown      | 6-8           | 792                | 17                       |
| St. Leonard Elementary School                     | St. Leonard      | PK-5          | 762                | 20                       |
| Southern Middle School                            | Lusby            | 6-8           | 662                | 15                       |
| Sunderland Elementary School                      | Sunderland       | K-5           | 479                | 17                       |
| Windy Hill Elementary School                      | Owings           | PK-5          | 695                | 18                       |
| Windy Hill Middle School                          | Owings           | 6-8           | 747                | 17                       |
| Subtotals   | 24 facilities    |               | 17,431             |                          |
| <b>St. Mary's County SD:</b>                      |                  |               |                    |                          |
| Benjamin Banneker Elementary School               | Loveville        | PK-5          | 722                | 15                       |
| Chopticon High School                             | Morganza         | 9-12          | 1,710              | 20                       |
| Dr. James A. Forrest Career and Technology Center | Leonardtown      |               |                    |                          |
| Dynard Elementary School                          | Chaptico         | PK-5          | 469                | 18                       |

**Table 2.5-23—{Public Schools Located in Calvert County  
and St. Mary's County}**  
(Page 2 of 2)

| Public School District / Schools              | City or Location     | Grades Taught | Number of Students | Students per FTE Teacher |
|---|----------------------|---------------|--------------------|--------------------------|
| Esperanza Middle School                       | Lexington Park       | 6-8           | 877                | 15                       |
| George Washington Carver Elementary School    | Great Mills          | PK-5          | 355                | 14                       |
| Great Mills High School                       | Great Mills          | 9-12          | 1,681              | 19                       |
| Green Holly Elementary School                 | Lexington Park       | PK-5          | 626                | 11                       |
| Greenview Knolls Elementary School            | Great Mills          | PK-5          | 501                | 18                       |
| Hollywood Elementary School                   | Hollywood            | PK-5          | 646                | 17                       |
| Leonardtown Elementary School                 | Leonardtown          | PK-5          | 554                | 20                       |
| Leonardtown High School                       | Leonardtown          | 9-12          | 1,796              | 21                       |
| Leonardtown Middle School                     | Leonardtown          | 6-8           | 1,020              | 17                       |
| Lettie Marshall Dent Elementary School        | Mechanicsville       | PK-5          | 522                | 17                       |
| Lexington Park Elementary School              | Lexington Park       | PK-5          | 509                | 15                       |
| Margaret Brent Middle School                  | Helen                | 6-8           | 889                | 16                       |
| Mechanicsville Elementary School              | Mechanicsville       | PK-5          | 339                | 20                       |
| Oakville Elementary School                    | Mechanicsville       | PK-5          | 443                | 19                       |
| Park Hall Elementary School                   | Park Hall            | PK-5          | 525                | 17                       |
| Piney Point Elementary School                 | Tall Timbers         | PK-5          | 600                | 18                       |
| Ridge Elementary School                       | Ridge                | PK-5          | 302                | 17                       |
| Spring Ridge Middle School                    | Lexington Park       | 6-8           | 897                | 16                       |
| St. Mary's County Alternative Learning Center | Leonardtown          | 7-11          | 52                 | 5                        |
| Town Creek Elementary School                  | Lexington Park       | PK-5          | 277                | 16                       |
| White Marsh Elementary School                 | Mechanicsville       | K-5           | 240                | 17                       |
| White Oak Secondary Center                    | Great Mills          |               |                    |                          |
| Subtotals                                     | 27 facilities        |               | 16,552             |                          |
| <b>Totals</b>                                 | <b>51 facilities</b> |               | <b>33,983</b>      |                          |

## Notes:

FTE = full-time equivalent

K = kindergarten

PK = pre-kindergarten

SD = School District

**Table 2.5-24—{Private Schools Located in Calvert County  
and St. Mary's County}**  
(Page 1 of 2)

| County / Private School             | City or Location | Grades Taught | Number of Students | Students per FTE Teacher |
|-------------------------------------|------------------|---------------|--------------------|--------------------------|
| <b>Calvert County:</b>              |                  |               |                    |                          |
| Cardinal Hickey Academy             | Owings           | K-8           | 226                | 12                       |
| Chesapeake Montessori Ltd.          | Huntingtown      | PK-4          | 52                 | 6                        |
| Kinds Landing Academy               | Huntingtown      | 1-12          | 34                 | 9                        |
| Mount Harmony Children's Shelter    | Owings           | 2-8           | 7                  | 7                        |
| Our Lady Star of the Sea School     | Solomons         | K-8           | 199                | 18                       |
| Shiloh Christian Academy            | Owings           | PK-12         | 64                 | 7                        |
| The Calverton School                | Huntingtown      | PK-12         | 410                | 9                        |
| The Tidewater School                | Huntingtown      | PK-5          | 59                 | 11                       |
| Subtotals                           | 8 schools        |               | 1,051              |                          |
| <b>St. Mary's County:</b>           |                  |               |                    |                          |
| Bay Montessori                      | Lexington Park   | 1-6           | 121                | 20                       |
| Clover Hill Mennonite School        | Leonardtown      | 1-8           | 17                 | 17                       |
| Father Andrew White SJ School       | Leonardtown      | PK-8          | 267                | 18                       |
| Friendship School                   | Mechanicsville   | 1-7           | 30                 | 15                       |
| Gospel Light Baptist Academy        | Mechanicsville   | K-8           | n/a                | n/a                      |
| Holy Angels Sacred Heart School     | Avenue           | PK-8          | 99                 | 10                       |
| Honey MacCallum Christian Preschool | California       | PK-K          | 65                 | 15                       |
| Leonard Hall Junior Naval Academy   | Leonardtown      | 6-12          | 94                 | 8                        |
| Lexington Park Baptist Preschool    | Lexington Park   | PK-K          | 80                 | 14                       |
| Little Flower School                | Great Mills      | PK-8          | 276                | 16                       |
| Loveville Mennonite School          | Leonardtown      | 1-8           | 43                 | 22                       |
| Mechanicsville Mennonite Christian  | Leonardtown      | 1-10          | N/A                | N/A                      |
| Mechanicsville Mennonite School     | Leonardtown      | 1-10          | N/A                | 8                        |

**Table 2.5-24—{Private Schools Located in Calvert County  
and St. Mary's County}**  
(Page 2 of 2)

| County / Private School          | City or Location  | Grades Taught | Number of Students | Students per FTE Teacher |
|----------------------------------|-------------------|---------------|--------------------|--------------------------|
| Mother Catherine Spalding School | Helen             | PK-8          | 194                | 15                       |
| Ryceville School                 | Mechanicsville    | 1-7           | 31                 | 31                       |
| St. John's Elementary School     | Hollywood         | K-8           | 214                | 15                       |
| St. Mary's Ryken High School     | Leonardtown       | 9-12          | 641                | N/A                      |
| St. Michaels School              | Ridge             | K-8           | 170                | 14                       |
| Starmaker Learning Center        | California        | PK-5          | 62                 | 8                        |
| Sunny Meadow Amish School        | Mechanicsville    | 1-8           | N/A                | N/A                      |
| The Creative Beginnings School   | California        | K             | 15                 | 25                       |
| The King's Christian Academy     | Callaway          | K-12          | 257                | 17                       |
| Victory Baptist Academy          | Charlotte Hall    | 1-11          | 59                 | 8                        |
| Woodburn Hill School             | Mechanicsville    | 1-8           | 28                 | 28                       |
| Woodside Amish School            | Mechanicsville    | 1-8           | N/A                | N/A                      |
| Subtotals                        | 25 schools        |               | 2,763              |                          |
|                                  |                   |               |                    |                          |
| <b>Totals</b>                    | <b>33 schools</b> |               | <b>3,814</b>       |                          |

## Notes:

FTE = full-time equivalent

K = kindergarten

PK = pre-kindergarten

N/A= Not available. Private schools are not required to release additional data and, thus, some data is not available.



**Table 2.5-25—{Boat Ramps and Public Landing/Launch Sites in Calvert County and St. Mary's County, Roughly from Closest to Farthest from the CCNPP Site}**

(Page 1 of 1)

| County/ Facility                                    | Location             | Availability of Boat Ramps |
|---|----------------------|----------------------------|
| <b>Calvert County:</b>                              |                      |                            |
| Hallowing Point Boat Ramp                           | Prince Frederick     | Yes                        |
| Solomons Public Boat Ramp and Fishing/Crabbing Pier | Solomons             | Yes                        |
| Nans Cove   | Broomes Island       | Canoes only                |
| Kings Landing Park                                  | Huntingtown          | Canoes only                |
| Subtotal  | 4 facilities         |                            |
| <b>St. Mary's County:</b>                           |                      |                            |
| Clarke's Landing                                    | Hollywood            | Yes                        |
| Forrest Landing                                     | Hollywood            | Yes                        |
| Abell's Wharf                                       | Leonardtown          | Yes                        |
| Camp Calvert Landing                                | Leonardtown          | Canoes only                |
| Paul Ellis Landing                                  | Avenue               | Piers only                 |
| River Springs Landing                               | Avenue               | Piers only                 |
| Bushwood Wharf                                      | Bushwood             | Yes                        |
| Chaptico Wharf                                      | Maddox               | Yes                        |
| Wicomico Shores Landing                             | Chaptico             | Yes                        |
| Tall Timbers Landing                                | Tall Timbers         | Piers only                 |
| Piney Point Landing                                 | Piney Point          | Yes                        |
| St. George Creek/Potomac River                      | Piney Point          | 1                          |
| St. George Island Landing                           | St. George Island    | Piers only                 |
| St. Mary's Lake                                     | St. Mary's Lake      | 2                          |
| St. Inigoes Landing                                 | St. Inigoes          | Yes                        |
| St. Mary's River/Smith Creek                        | St. Inigoes          | 1                          |
| Fresh Pond Neck Landing                             | Ridge                | Canoes only                |
| Fox Harbor Landing                                  | Wynne                | Piers only                 |
| Subtotal  | 18 facilities        |                            |
| <b>Totals</b>                                       | <b>22 facilities</b> |                            |

**Table 2.5-26—{Marinas in Calvert County and St. Mary's County,  
Roughly from Closest to Farthest from the CCNPP Site}**

(Page 1 of 2)

| County / Marina              | City or Location | Annual Dockage/Transients | Mean Water Level, feet |
|------------------------------|------------------|---------------------------|------------------------|
| <b>Calvert County:</b>       |                  |                           |                        |
| KB Derr & Son Marina         | Lusby            | 100                       | 4 ft                   |
| Vera's White Sands Marina    | Lusby            | 100                       | 15 ft                  |
| Flag Harbor Yacht Haven      | St. Leonard      | 168                       | 7 ft                   |
| Broomes Island Marina        | Broomes Island   | 40                        | 5.5 ft                 |
| Beacon Marina                | Solomons         | 186                       | 6 ft                   |
| Calvert Marina               | Solomons         | 450                       | 10 ft                  |
| Harbor Island Marina, Inc.   | Solomons         | 115                       | 12 ft                  |
| Hospitality Harbor Marina    | Solomons         | 75                        | 8 ft                   |
| Spring Cove Marina           | Solomons         | 250                       | 15 ft                  |
| Solomons Yachting Center     | Solomons         | 100                       | 12 ft                  |
| Zahniser's Yachting Center   | Solomons         | 300                       | 15 ft                  |
| Abner's Marina               | Chesapeake Beach | 100                       | 6 ft                   |
| Breezy Point Marina          | Chesapeake Beach | 225                       | 4.5 ft                 |
| Rod 'N Reel Dock             | Chesapeake Beach | 125                       | 5 – 6 ft               |
| Rod 'N Reel Marina West      | Chesapeake Beach | 88                        | 5 – 6 ft               |
| Subtotals                    | 15 marinas       | 2,422                     | N/A                    |
| <b>St. Mary's County:</b>    |                  |                           |                        |
| Boatel California            | California       | N/A                       | N/A                    |
| Blackstone Marina            | Hollywood        | N/A                       | N/A                    |
| Week's Marina                | Hollywood        | N/A                       | N/A                    |
| Combs Creek Marina           | Leonardtwn       | N/A                       | N/A                    |
| Cape St. Mary's Marina, Inc. | Mechanicsville   | N/A                       | N/A                    |
| Lindy's Marina               | Avenue           | N/A                       | N/A                    |
| St. Patrick's Creek Marina   | Abell            | N/A                       | N/A                    |
| Cather Marine, Inc.          | Colton's Point   | N/A                       | N/A                    |
| Colton's Point Marina        | Colton's Point   | N/A                       | N/A                    |
| Cedar Cove Marina            | Valley Lee       | N/A                       | N/A                    |
| Dennis Point Marina          | Drayden          | N/A                       | N/A                    |
| Feldman's Marine Railways    | Drayden          | N/A                       | N/A                    |
| St. Mary's Yachting Center   | Drayden          | N/A                       | N/A                    |
| Tall Timbers Marina          | Tall Timbers     | N/A                       | N/A                    |

**Table 2.5-26—{Marinas in Calvert County and St. Mary's County,  
Roughly from Closest to Farthest from the CCNPP Site}**

(Page 2 of 2)

| County / Marina      | City or Location  | Annual Dockage/Transients | Mean Water Level, feet |
|----------------------|-------------------|---------------------------|------------------------|
| Curly's Point Marina | Piney Point       | N/A                       | N/A                    |
| Haskell's Marina     | Piney Point       | N/A                       | N/A                    |
| Buzz's Marina        | Ridge             | N/A                       | N/A                    |
| Drury's Marina       | Ridge             | N/A                       | N/A                    |
| Phil's Marina        | Ridge             | N/A                       | N/A                    |
| Point Lookout Marina | Ridge             | N/A                       | N/A                    |
| Rick's Marine        | Scotland          | N/A                       | N/A                    |
| Subtotals            | 21 marinas        | N/A                       | N/A                    |
| <b>Totals</b>        | <b>36 marinas</b> | <b>N/A</b>                | <b>N/A</b>             |

Notes:

N/A = not applicable

**Table 2.5-27—{Charter Boat Services/Associations in Calvert County  
and St. Mary's County, Roughly from Closest to Farthest  
from the CCNPP Site}**

(Page 1 of 2)

| County/Service                        | Location         | Number of Boats |
|---------------------------------------|------------------|-----------------|
| <b>Calvert County:</b>                |                  |                 |
| Bay Paddlers                          | Chesapeake Beach | N/A             |
| Breezy Point Charter Boat Association | Chesapeake Beach | N/A             |
| Chesapeake Beach Fishing Charters     | Chesapeake Beach | 15              |
| Rod-N-Reel Charter Captains           | Chesapeake Beach | 25              |
| Bunky's Charter Boats                 | Solomons         | N/A             |
| Calvert Marina Charter Dock           | Solomons         | 16              |
| Solomons Charter Captains Association | Solomons         | 40              |
| <b>St. Mary's County:</b>             |                  |                 |
| Brady Bounds                          | Lexington Park   | N/A             |
| Mark Bowes                            | Leonardtown      | N/A             |
| John Guy                              | Leonardtown      | N/A             |
| Bob Holden                            | Leonardtown      | N/A             |
| James Sommerville                     | Loveville        | N/A             |
| Pete Ide                              | Callaway         | N/A             |
| Matt Bowes                            | Valley Lee       | N/A             |
| Joe Scrivener                         | Valley Lee       | N/A             |
| Mopey Barber                          | Tall Timbers     | N/A             |
| Bob Bowes                             | Tall Timbers     | N/A             |
| Mark Miller                           | Tall Timbers     | N/A             |
| Jeff Swanson                          | Tall Timbers     | N/A             |
| Jeff Pharis                           | Piney Point      | N/A             |
| Stan Harris                           | St. Inigoes      | N/A             |
| Phil Langley, Jr.                     | Dameron          | N/A             |
| Charles Nicholson                     | Dameron          | N/A             |
| David Bradburn                        | Ridge            | N/A             |
| Joseph Bryan                          | Ridge            | N/A             |
| Butch Cornelius                       | Ridge            | N/A             |
| Eddie Davis                           | Ridge            | N/A             |
| Steve Davis                           | Ridge            | N/A             |
| Greg Drury                            | Ridge            | N/A             |
| James Gray                            | Ridge            | N/A             |

**Table 2.5-27—{Charter Boat Services/Associations in Calvert County  
and St. Mary's County, Roughly from Closest to Farthest  
from the CCNPP Site}**

(Page 2 of 2)

| County/Service  | Location | Number of Boats |
|---|----------|-----------------|
| Craig Kelly   | Ridge    | N/A             |
| Clayton Lore & Joseph Lore, II  | Ridge    | N/A             |
| Greg Madjeski   | Ridge    | N/A             |
| Jason McLaughlin  | Ridge    | N/A             |
| Dave Norris   | Ridge    | N/A             |
| Steve & Mike Owens  | Ridge    | N/A             |
| Dave Norris   | Ridge    | N/A             |
| Steve & Mike Owens  | Ridge    | N/A             |
| Randy Powers  | Ridge    | N/A             |
| Scott Russell   | Ridge    | N/A             |
| Gary Sacks  | Ridge    | N/A             |
| Bruce Scheible  | Ridge    | N/A             |
| Jim Van Reenen  | Ridge    | N/A             |
| Darryl Gay  | Scotland | N/A             |
| Note:<br>Charter boat information for Calvert County was available by boat association whereas information for St. Mary's County was available by individual boat captain.<br>N/A = not available |          |                 |

**Table 2.5-28—{Campgrounds and RV Parks Within About 30 Miles (48.3 km) of Lusby, Maryland}**  
(Page 1 of 1)

| Campground/RV Park  | Location or Area    | Spaces       | Distance from Lusby (mi) |
|---|---------------------|--------------|--------------------------|
| <b>Calvert County:</b>  |                     |              |                          |
| Breezy Point Beach & Campground   | Chesapeake Beach    | 80           | N/A                      |
| Patuxent Camp Sites   | St. Leonard         | 75           | 11.6                     |
| Subtotals   | 2 facilities        | 155          | N/A                      |
| <b>St. Mary's County:</b>   |                     |              |                          |
| Take It Easy Campground   | Callaway            | 264          | 18.5                     |
| St. Mary's Yachting Center (formerly Dennis Point)  | Drayden             | 100          | N/A                      |
| Dennis Point Campground   | Drayden             | 75           | 24.9                     |
| Seaside View Park and Campground  | Ridge               | N/A          | 26.7                     |
| Camp Merryelande Vacation Cottages  | Piney Point         | 49           | 28.3                     |
| Point Lookout State Park  | Scotland            | 143          | 31.2                     |
| Subtotals   | 6 facilities        | 631          | N/A                      |
| <b>Charles County:</b>  |                     |              |                          |
| Aqualand on the Potomac Campground  | Newburg             | 98           | 44.4                     |
| <b>Totals</b>   | <b>9 facilities</b> | <b>1,515</b> | <b>N/A</b>               |
| Notes:<br>N/A = not available<br>Campgrounds within Dorchester County within the 30-linear mile radius of Lusby are excluded from this table because they are not on the peninsula and the actual driving miles would be too extensive for potential commuting to the CCNPP site. |                     |              |                          |

**Table 2.5-29—{Property and Income Tax Rates in Calvert County  
and St. Mary's County, 2006}**

(Page 1 of 1)

| Type of Tax, 2006                    | County  |            |
|--------------------------------------|---------|------------|
|                                      | Calvert | St. Mary's |
| Property Taxes, per \$100 valuation: |         |            |
| Real Property                        | 0.892%  | 0.872%     |
| Personal Property                    | 2.23    | N/A        |
| Utility Property                     | 22.3    | N/A        |
| Effective Rate                       | 3.122   | N/A        |
| Income Tax:                          | 2.80%   | 3.00%      |

**Table 2.5-30—{Fiscal Year 2005 Actual County Revenues and Expenditures in Calvert County and St. Mary's County (rounded, in 2005 million dollars)}**

(Page 1 of 2)

| Type of Revenue/Expenditure                      | Calvert County  |               | St. Mary's County |                |
|--|-----------------|---------------|-------------------|----------------|
|  | 2005 million \$ | Percent       | 2005 million \$   | Percent        |
| <b>Revenues:</b>                                 |                 |               |                   |                |
| Property Taxes                                   | \$ 78.8         | 45.3 %        | \$ 58.3           | 40.2 %         |
| Income Taxes                                     | 54.4            | 31.2          | 54.1              | 37.3           |
| Other Local Taxes                                | 14.5            | 8.3           | 13.4              | 9.2            |
| State Shared Taxes                               | 5.3             | 3.0           | 6.2               | 4.3            |
| Licenses & Permits                               | 0.2             | 0.1           | 0.8               | 0.6            |
| Intergovernmental                                | 10.3            | 5.9           | 6.2               | 4.3            |
| Charges for Services                             | 3.5             | 2.0           | 4.7               | 3.2            |
| Fines & Forfeitures                              | 0.1             | < 0.1         | 0.2               | 0.1            |
| Miscellaneous                                    | 4.2             | 2.4           | 1.2               | 0.8            |
| Other Financing Sources                          | 2.8             | 1.6           | 0.0               | 0.0            |
| <b>Total Revenues</b>                            | <b>\$ 174.1</b> | <b>99.9 %</b> | <b>\$ 145.2</b>   | <b>100.0 %</b> |
| <b>Operating Expenditures:</b>                   |                 |               |                   |                |
| County Commissioners/Admin.                      | 0.3             | 0.4           | 0.9               | 1.3            |
| Aging  | 1.4             | 1.7           | 1.7               | 2.4            |
| Public Safety                                    | 4.0             | 4.8           | 3.3               | 4.7            |
| State Attorney                                   | 1.1             | 1.3           | 1.9               | 2.7            |
| County Attorney                                  | 0.6             | 0.7           | 0.4               | 0.6            |
| Circuit & Orphan's Court                         | 0.6             | 0.7           | 1.0               | 1.4            |
| Sheriff & Corrections                            | 12.0            | 14.4          | 17.8              | 25.1           |
| Economic Development                             | 0.9             | 1.1           | 2.3               | 3.2            |
| Finance  | 1.3             | 1.6           | 1.1               | 1.6            |
| Treasurer  | 0.3             | 0.4           | 0.3               | 0.4            |
| Public Works & Transportation                    | 7.6             | 9.1           | 13.6              | 19.2           |
| Marcey Halfway House                             | n/a             | n/a           | 0.4               | 0.6            |
| Human Resources/Personnel                        | 0.4             | 0.5           | 1.2               | 1.7            |
| Land Use Planning/Zoning & Growth Management     | 2.2             | 2.6           | 2.0               | 2.8            |
| Recreation & Parks                               | 2.5             | 3.0           | 3.1               | 4.4            |
| Natural Resources & Community Services/Resources | 6.6             | 7.9           |                   |                |
| Information Technology                           | 1.4             | 1.7           | 1.7               | 2.4            |



**Table 2.5-30—{Fiscal Year 2005 Actual County Revenues and Expenditures in Calvert County and St. Mary's County (rounded, in 2005 million dollars)}**

(Page 2 of 2)

| Type of Revenue/Expenditure   | Calvert County  |                | St. Mary's County |                |
|---|-----------------|----------------|-------------------|----------------|
|   | 2005 million \$ | Percent        | 2005 million \$   | Percent        |
| Capital Projects  | 8.8             | 10.5           | N/A               | N/A            |
| Pensions & Insurance  | 10.4            | 12.4           | N/A               | N/A            |
| State & Other Agencies  | 5.4             | 6.5            | 2.2               | 3.1            |
| College of Southern Maryland  | 1.9             | 2.3            | 2.1               | 3.0            |
| Library   | 2.5             | 3.0            | 1.7               | 2.4            |
| Debt Service & Other  | 10.2            | 12.2           | 12.1              | 17.1           |
| <b>Subtotal Operating Expenditures</b>  | <b>\$ 83.6</b>  | <b>98.8 %</b>  | <b>\$ 70.8</b>    | <b>100.1%</b>  |
| <b>Other Expenditures:</b>  |                 |                |                   |                |
| Operating Transfers Out - Board Of Education  | \$ 80.9         | 97.9 %         | \$ 58.9           | 97.8 %         |
| Operating Transfers Out – Other   | 1.7             | 2.1            | 1.4               | 2.3            |
| <b>Subtotal Other Expenditures</b>  | <b>\$ 82.6</b>  | <b>100.0 %</b> | <b>\$ 60.3</b>    | <b>100.1 %</b> |
| <b>Total Operating and Other Expenditures</b>   | <b>166.2</b>    | <b>N/A</b>     | <b>\$131.1</b>    | <b>N/A</b>     |
| Notes:  |                 |                |                   |                |
| N/A = not applicable  |                 |                |                   |                |
| Percentages and numbers may total slightly more or less than the total due to rounding. |                 |                |                   |                |

**Table 2.5-31—{Calvert County General Fund Revenues and County-wide Taxable Assessed Property Values, 2000 to 2005}**

(Page 1 of 1)

| Calvert County General Fund Revenue        | Fiscal Year     |                 |                 |
|--|-----------------|-----------------|-----------------|
|  | 2000            | 2001            | 2002            |
| Total Revenues:                            | \$ 119,537,896  | \$ 127,871,223  | \$ 131,015,438  |
| Total Taxes                                | 106,816,325     | 112,063,431     | 114,167,126     |
| Property Taxes (real and personal, levied) | 66,287,086      | 64,521,905      | 63,182,466      |
| Taxable Assessed Value (real property):    | \$1,885,426,385 | \$1,977,672,353 | \$5,203,051,084 |
| Calvert County General Fund Revenue        | Fiscal year     |                 |                 |
|  | 2003            | 2004            | 2005            |
| Total Revenues:                            | \$ 136,064,177  | \$ 149,011,597  | \$ 174,053,536  |
| Total Taxes                                | 120,210,329     | 133,860,495     | 153,049,038     |
| Property Taxes (real and personal, levied) | 66,188,158      | 71,093,332      | 78,790,203      |
| Taxable Assessed Value (real property):    | \$5,577,546,203 | \$5,967,684,896 | \$6,522,591,844 |
| CCNPP Assessed Value                       | N/A             | N/A             | \$ 675,153,560  |

**Notes:**

As of FY 2002, real property taxes are assessed at the property's estimated actual value. Previously, real property taxes were assessed at 40% of the property's estimated real value. Reflects decreases in assessment due to tax reform related to electric deregulation. A 50% exemption was given on assets used in the generation of electricity. This exemption was phased in over two years.

N/A = not available

**Table 2.5-32—{Water Districts/Systems in Calvert County and  
St. Mary's County }**

(Page 1 of 2)

| County / Water System                 | Number of Customers/<br>Accounts | Capacity (gals/day) | Level of Use |            |
|---------------------------------------|----------------------------------|---------------------|--------------|------------|
|                                       |                                  |                     | Gallons/day  | Percentage |
| Calvert County:                       |                                  |                     |              |            |
| Cavalier County Water                 | 134                              | 216,000             | 45,000       | 20.8 %     |
| Chesapeake Heights Water              | 283                              | 216,000             | 55,000       | 25.5       |
| Chesapeake Lighthouse Water and Sewer | 134                              | N/A                 | 1,000        | N/A        |
| Cross Point Water                     | 141                              | N/A                 | 3,000        | N/A        |
| Dares Beach Water                     | 186                              | 87,000              | 38,000       | 43.7       |
| Dares Beach Water and Sewer           | N/A                              | N/A                 | N/A          | N/A        |
| Hunting Hills Water                   | 44                               | 29,000              | 14,000       | 48.3       |
| Industrial Park Water and Sewer       | 34                               | N/A                 | 2,000        | N/A        |
| Kenwood Beach Water                   | 117                              | 72,000              | 21,000       | 29.2       |
| Lakewood Water                        | 69                               | 36,000              | 23,000       | 63.9       |
| Marley Run Water and Sewer            | 48                               | n/a                 | 5,000        | n/a        |
| Paris Oaks Water                      | 89                               | 32,000              | 13,000       | 40.6       |
| Prince Frederick Water and Sewer      | 1,029                            | 288,000             | 117,000      | 40.6       |
| Shores of Calvert Water               | 126                              | 216,000             | 30,000       | 13.9       |
| Solomons Water and Sewer              | 976                              | 900,000             | 225,000      | 25.0       |
| St. Leonard Water                     | 105                              | 65,000              | 12,000       | 18.5       |
| Summit/Highlands Water                | 259                              | 860,000             | 40,000       | 4.7        |
| Tara Water                            | 24                               | N/A                 | 2,000        | N/A        |
| Walnut Creek Water                    | 56                               | N/A                 | 2,000        | N/A        |
| White Sands Water                     | 29                               | 10,000              | 7,000        | 70.0       |
| Subtotals - 20 Districts              | 3,883                            |                     |              |            |
| St. Mary's County:                    |                                  |                     |              |            |
| Birch Manor                           | 100                              | 97,000              | 21,000       | 21.6       |
| Breton Bay                            | 360                              | 263,000             | 99,000       | 37.6       |
| Cedar Cove                            | 439                              | 492,000             | 93,000       | 18.9       |
| Country Lakes                         | 1,068                            | 360,000             | 270,000      | 75.0       |
| Fenwick Manor                         | 96                               | 125,000             | 22,000       | 17.6       |
| Forest Farms                          | N/A                              | 289,000             | N/A          | N/A        |
| Fox Meadow                            | 32                               | 88,000              | 8,000        | 9.1        |
| Greenbrier                            | 140                              | 525,000             | 31,000       | 5.9        |

**Table 2.5-32—{Water Districts/Systems in Calvert County and  
St. Mary's County }**

(Page 2 of 2)

| County / Water System        | Number of<br>Customers/<br>Accounts | Capacity<br>(gals/day) | Level of Use |            |
|------------------------------|-------------------------------------|------------------------|--------------|------------|
|                              |                                     |                        | Gallons/day  | Percentage |
| Hearts Desire                | 24                                  | 110,000                | 3,000        | 2.7        |
| Holland Forest               | 49                                  | 260,000                | 9,000        | 3.5        |
| Hollywood                    | 20                                  | 99,000                 | 7,000        | 7.1        |
| Hunting Quarters             | 179                                 | 330,000                | 37,000       | 11.2       |
| King & Kennedy               | 59                                  | 97,000                 | 20,000       | 20.6       |
| Laurel Ridge                 | 209                                 | 182,000                | 49,000       | 26.9       |
| Lexington Park               | 8,968                               | 3,548,000              | 2,343,000    | 66.0       |
| Mulberry South               | 20                                  | 62,000                 | 4,000        | 6.5        |
| Persimmon Hill               | 70                                  | 113,000                | 16,000       | 14.2       |
| Piney Point                  | 213                                 | 180,000                | 60,000       | 33.3       |
| Piney Point Landings         | 58                                  | 163,000                | 16,000       | 9.8        |
| Rolling Acres                | 247                                 | 145,000                | 55,000       | 37.9       |
| Southgate                    | 79                                  | 100,000                | 8,000        | 8.0        |
| St. Clements Shores          | 219                                 | 90,000                 | 47,000       | 52.2       |
| Village of Leonardtown       | N/A                                 | N/A                    | N/A          | N/A        |
| Wicominco Shores             | 420                                 | 196,000                | 85,000       | 43.4       |
| Wilderness Run               | 98                                  | 161,000                | 19,000       | 11.8       |
| Subtotals - 25 Districts     | 13,167                              |                        |              |            |
| <b>Totals - 45 Systems</b>   | <b>17,050</b>                       |                        |              |            |
| Note:<br>N/A = not available |                                     |                        |              |            |

**Table 2.5-33—{Sewer Districts/Systems in Calvert County and St. Mary's County}**

(Page 1 of 1)

| County / Sewer System                 | Number of Customers/<br>Accounts | Capacity<br>(gals/day) | Level of Use      |             |
|---------------------------------------|----------------------------------|------------------------|-------------------|-------------|
|                                       |                                  |                        | Gallons/day       | Percentage  |
| Calvert County:                       |                                  |                        |                   |             |
| Chesapeake Lighthouse Water and Sewer | N/A                              | N/A                    | N/A               | N/A         |
| Dares Beach Water and Sewer           | N/A                              | N/A                    | N/A               | N/A         |
| Industrial Park Water and Sewer       | N/A                              | 60,000                 | 20,000            | 33.3        |
| Marley Run Water and Sewer            | N/A                              | 15,000                 | 6,000             | 40.0        |
| Prince Frederick Water and Sewer      | 435                              | 750,000                | 400,000           | 53.3        |
| Twin Beach Sewer                      | N/A                              | N/A                    | N/A               | N/A         |
| Solomons Water and Sewer              | 3,500                            | 700,000                | 400,000           | 57.1        |
| Subtotals – facilities                | 3,935                            |                        |                   |             |
| St. Mary's County:                    |                                  |                        |                   |             |
| Leonardtown                           | 1,828                            | 680,000                | 450,000 – 468,000 | 66.2 – 68.8 |
| Pine Hill Run                         | 10,464                           | 6,000,000              | 3,400,000         | 56.7        |
| St. Clement's Shores                  | 379                              | 100,000                | 84,000 – 85,000   | 84.0 – 85.0 |
| Wicomico Shores                       | 398                              | 141,000                | 107,000 – 114,000 | 75.9 – 80.9 |
| Subtotals – 4 facilities              | 13,069                           |                        |                   |             |
| Totals – 11 facilities                | 17,004                           |                        |                   |             |
| Note:<br>N/A = not available          |                                  |                        |                   |             |

**Table 2.5-34—{Fiscal Year 2005 Actual Law Enforcement Agency Staffing, Budgets, and Calls for Service in Calvert County and St. Mary's County}**

(Page 1 of 1)

| Department                            | Agency                             |                |                   |
|---------------------------------------|------------------------------------|----------------|-------------------|
|                                       | Maryland State Troopers, Statewide | Calvert County | St. Mary's County |
| <b>Law Enforcement Department:</b>    |                                    |                |                   |
| Staff (FTEs):                         |                                    |                |                   |
| Officers                              | 1,516                              | 92.4           | N/A               |
| Support/Other                         | 723                                | 13.2           | N/A               |
| Subtotals                             | 2,239                              | 105.6          | N/A               |
| Budget:                               |                                    |                |                   |
| Salaries                              | \$ 171.6                           | \$ 6.0         | \$ 11.3           |
| Other Expenses                        | \$ 114.1                           | 0.9            | 0.5               |
| Subtotals                             | \$ 285.7                           | \$ 6.9         | \$ 11.8           |
| <b>Detention Facilities:</b>          |                                    |                |                   |
| Staff (FTEs):                         |                                    |                |                   |
| Officers                              | N/A                                | 51.0           | N/A               |
| Support/Other                         | N/A                                | 13.5           | N/A               |
| Subtotals                             | 11,740                             | 64.5           | N/A               |
| Budget:                               |                                    |                |                   |
| Salaries                              | N/A                                | \$ 3.3         | N/A               |
| Other Expenses                        | N/A                                | 1.2            | N/A               |
| Subtotals                             | \$1.0                              | \$4.5          | \$ 6.0            |
| Inmate Population:                    |                                    |                |                   |
| Number of Inmates Received/Processed  | N/A                                | 2,917          | 2,545             |
| Average Daily Population              | 26,748                             | 222            | 292               |
| Notes:<br>FTE = full-time equivalents |                                    |                |                   |

**Table 2.5-35—{Fire/EMS Departments in Calvert County and  
St. Mary's County}**  
(Page 1 of 2)

| County /<br>Department                                       | Location or Area | Type of<br>Department                     | Number of<br>Stations | Number of<br>Firefighters / Other<br>Staff | CY 2005 Calls |
|--|------------------|---|-----------------------|--|---------------|
| <b>Calvert County:</b>                                       |                  |   |                       |  |               |
| Calvert Advanced<br>Life Support, Co. 10                     | N/A              | Volunteer                                 | N/A                   | N/A  | 3,781         |
| Calvert Dive Rescue<br>Team, Co. 12                          | N/A              | Volunteer                                 | N/A                   | N/A  | 21            |
| Dunkirk VFD & RS,<br>Co. 5                                   | Dunkirk          | Volunteer                                 | 1                     | 75 / 15                                    | 1,794         |
| Huntingtown VFD &<br>RS, Co. 6                               | Huntingtown      | Volunteer                                 | 1                     | 60 / 6                                     | 2,057         |
| North Beach VFD &<br>RS, Co. 1                               | Chesapeake Beach | Volunteer                                 | 1                     | 65 / 0                                     | 1,691         |
| Prince Frederick VFD,<br>Co. 2                               | Prince Frederick | Volunteer                                 | 1                     | 55 / 10                                    | 937           |
| Prince Frederick VRS,<br>Co. 4                               | Prince Frederick | Volunteer                                 | See Co. 2             | See Co. 2                                  | 2,001         |
| Saint Leonard VFD &<br>RS, Co. 7                             | Saint Leonard    | Volunteer                                 | N/A                   | N/A  | 1,700         |
| Solomons VRS & FD,<br>Co. 3                                  | Solomons         | Volunteer                                 | 2                     | 60 / 25                                    | 2,815         |
| Subtotals  |                  |   | 6                     | 800 (315 / 56 *)                           | 16,797        |
| <b>St. Mary's County:</b>                                    |                  |   |                       |  |               |
| Department of<br>Public Safety, Fire &<br>Emergency Services | Patuxent River   | Career – U.S.<br>Department of<br>Defense | 3                     | 66 / 11                                    | N/A           |
| Hollywood VFD  | Hollywood        | Volunteer                                 | 1                     | 75 / 20                                    | N/A           |
| Leonardtown VFD  | Leonardtown      | Volunteer                                 | 1                     | 59 / 15                                    | N/A           |
| Mechanicsville VFD,<br>Inc.                                  | Mechanicsville   | Volunteer                                 | 2                     | 110 / 20                                   | N/A           |
| Ridge VFD  | Ridge            | Volunteer                                 | 1                     | 80 / 30                                    | N/A           |
| Seventh District VFD,<br>Inc.                                | Avenue           | Volunteer                                 | 1                     | 32 / 0                                     | N/A           |
| Subtotals  |                  |   | 9                     | 737 / 152                                  | N/A           |
| <b>Totals</b>  |                  |   | <b>15</b>             |  |               |

**Table 2.5-35—{Fire/EMS Departments in Calvert County and  
St. Mary's County}**

(Page 2 of 2)

| County /<br>Department  | Location or Area | Type of<br>Department | Number of<br>Stations | Number of<br>Firefighters / Other<br>Staff | CY 2005 Calls |
|---|------------------|-----------------------|-----------------------|--|---------------|
| <p>Notes:</p> <p>Cop. = Company</p> <p>CY = calendar year</p> <p>FD = Fire Department</p> <p>n/a = not available</p> <p>RS = Rescue Squad</p> <p>VFD = Volunteer Fire Department</p> <p>VRS = Volunteer Rescue Squad</p> <p>* = The public safety office and other sources note that there are over 800 volunteers staffing the fire/EMS departments in Calvert County. Thus, the staff levels for each department are only provided to illustrate the general distribution of staff.</p> |                  |                       |                       |  |               |



**Table 2.5-36—{EMS Calls for Service in Calvert County and St. Mary's County, June 2005 to May 2006}**

(Page 1 of 1)

| <b>County of Occurrence</b> | <b>County Where Injury Occurred</b> | <b>Patient's County of Residence</b> | <b>Number of Children Injured</b> |
|-----------------------------|-------------------------------------|--------------------------------------|-----------------------------------|
| Calvert County              | 132                                 | 175                                  | 27                                |
| St. Mary's County           | 147                                 | 119                                  | 29                                |

**Table 2.5-37—{Peak Hour Traffic Volumes at Calvert Cliffs Parkway and MD 2/4}**

(Page 1 of 1)

| <b>Before Labor Day (Late Aug 2006)</b>                      |           |           |         |          |       |
|--|-----------|-----------|---------|----------|-------|
|  | MD 2/4 NB | MD 2/4 SB | Site In | Site Out | Total |
| AM Peak Hour   | 1,252     | 1,048     | 82      | 14       | 2,396 |
| PM Peak Hour   | 1,078     | 1,581     | 25      | 178      | 2,862 |
| <b>After Labor Day (Late September – Early October 2006)</b> |           |           |         |          |       |
|  | MD 2/4 NB | MD 2/4 SB | Site In | Site Out | Total |
| AM Peak Hour   | 1,235     | 1,005     | 88      | 10       | 2,338 |
|  | 1,104     | 1,412     | 37      | 204      | 2,757 |

**Table 2.5-38—{Summary of Surveyed Architectural Resources}**

(Page 1 of 1)

| <b>MHT No.</b>   | <b>Name</b>  | <b>Date</b> | <b>Resource Type</b>   | <b>Location</b>                      | <b>Recommended NRHP Status</b>   |
|--|--|-------------|--|--------------------------------------|--|
| CT-58  | Parran's Park  | c1750       | Abandoned Farmstead;<br>3 tobacco barns  | In the 600 acre (243<br>hectare) APE | Not Eligible   |
| CT-59  | Preston's Cliff,<br>Charles's Gift, The<br>Wilson Farm | c1690       | Ruins; 3 tobacco barns<br>and house ruins  | In the APE for visual<br>effects     | NRHP Eligible under<br>Criteria A and C  |
| CT-154   | Calvert Cliffs<br>Nuclear Power<br>Plant               | c1975       | Nuclear Power Plant  | In the APE and adjacent<br>area      | Not Eligible   |
| CT-1295  | Baltimore & Drum<br>Point Railroad                     | c1890       | Abandoned Railroad;<br>railroad bed  | In the APE                           | Offsite portions<br>determined NRHP<br>eligible; project<br>portions NRHP Eligible<br>under Criteria A and C |
| CT-1312  | Camp Conoy   | c1930       | YMCA Camp; 6<br>buildings, 2 pavilions,<br>playground, swimming<br>pool, tennis courts | In the APE and adjacent<br>area      | NRHP Eligible under<br>Criterion A   |
| Notes:<br>MHT = Maryland Historical Trust<br>NRHP = National Register of Historic Places |  |             |  |                                      |  |

**Table 2.5-39—{Summary of Surveyed Archaeological Sites}**  
(Page 1 of 2)

| Site<br>(MHT No.)    | Dimensions<br>feet (meters) | Artifacts<br>(Hist.) | Artifacts<br>(Prehist.) | Site Type  | Age  | Recommended<br>NRHP Status | Recommendations |
|----------------------|-----------------------------|----------------------|-------------------------|--|--|----------------------------|-----------------|
| Site 1 (18CV474)     | 148 x 148<br>(45 x 45)      | 175                  | --                      | Artifact Scatter/<br>Foundation                        | 19 <sup>th</sup> century   | Potentially<br>Eligible    | Avoid/Phase II  |
| Site 2<br>(18CV475)  | 49 x 49<br>(15 x 15)        | 17                   | --                      | Artifact Scatter/<br>Foundation                        | 19 <sup>th</sup> century   | Not eligible               | No Further Work |
| Site 3<br>(18CV476)  | 82 x 26<br>(25 x 8)         | 4                    | --                      | Refuse Dump  | 20 <sup>th</sup> century/<br>Modern  | Not eligible               | No Further Work |
| Site 4<br>(18CV477)  | 148 x 449<br>(45 x 137)     | 102                  | --                      | Refuse Dump/<br>Outbuilding                            | Mid-late 20 <sup>th</sup><br>century   | Not eligible               | No Further Work |
| Site 5<br>(18CV478)  | 66 x 82<br>(20 x 25)        | 24                   | --                      | Artifact Scatter                                       | 20 <sup>th</sup> century   | Not eligible               | No Further Work |
| Site 6<br>(18CV479)  | 49 x 66<br>(15 x 20)        | --                   | 7                       | Lithic Scatter   | Indeterminate<br>Prehistoric   | Not eligible               | No Further Work |
| Site 7<br>(18CV480)  | 997 x 499<br>(304 x 152)    | 294                  | --                      | Domestic Site  | Mid 19 <sup>th</sup> to 20 <sup>th</sup><br>century                                  | Potentially<br>Eligible    | Avoid/Phase II  |
| Site 8<br>(18CV481)  | 148 x 108<br>(45 x 33)      | 31                   | --                      | Domestic Site  | 19 <sup>th</sup> to early 20 <sup>th</sup><br>century                                | Potentially<br>Eligible    | Avoid/Phase II  |
| Site 9<br>(18CV482)  | 148 x 98<br>(45 x 30)       | 64                   | --                      | Domestic Site  | Mid 19 <sup>th</sup> to early<br>20 <sup>th</sup> century                            | Potentially<br>Eligible    | Avoid/Phase II  |
| Site 10<br>(18CV483) | 141 x 118<br>(43 x 36)      | 54                   | 1                       | Domestic Site/<br>Artifact Scatter/<br>Lithic Findspot | Mid 19 <sup>th</sup> to 20 <sup>th</sup><br>century;<br>Indeterminate<br>Prehistoric | Potentially<br>Eligible    | Avoid/Phase II  |
| Site 11<br>(18CV484) | 318 x 39<br>(97 x 12)       | 12                   | --                      | Field Scatter  | 20 <sup>th</sup> century   | Not eligible               | No Further Work |
| Site 12<br>(18CV485) | 16 x 33<br>(5 x 10)         | 5                    | --                      | Artifact Scatter                                       | Mid 19 <sup>th</sup> to 20 <sup>th</sup><br>century                                  | Not eligible               | No Further Work |
| Site 13<br>(18CV486) | 69 x 39<br>(21 x 12)        | 9                    | --                      | Artifact Scatter                                       | 19 <sup>th</sup> to 20 <sup>th</sup><br>century                                      | Not eligible               | No Further Work |

Table 2.5-39—{Summary of Surveyed Archaeological Sites}

(Page 2 of 2)

| Site<br>(MHT No.)    | Dimensions<br>feet (meters) | Artifacts<br>(Hist.) | Artifacts<br>(Prehist.) | Site Type        | Age                      | Recommended<br>NRHP Status | Recommendations |
|----------------------|-----------------------------|----------------------|-------------------------|------------------|--------------------------|----------------------------|-----------------|
| Site 14<br>(18CV487) | 115 x 33<br>(35 x 10)       | 7                    | --                      | Artifact Scatter | 19 <sup>th</sup> century | Not eligible               | No Further Work |

Notes:  
NRHP = National Register of Historic Places  
MHT = Maryland Historic Trust

**Table 2.5-40—{Summary of Identified Isolated Finds}**

(Page 1 of 1)

| IF    | Setting | Landform       | Age         | NRHP Eligibility |
|-------|---------|----------------|-------------|------------------|
| IF 1  | Upland  | Ridge spur     | Prehistoric | Not eligible     |
| IF 2  | Upland  | Upland Flat    | Prehistoric | Not eligible     |
| IF 3  | Upland  | Bench          | Prehistoric | Not eligible     |
| IF 5  | Upland  | Side Slope     | Prehistoric | Not eligible     |
| IF 6  | Upland  | Ridge          | Historic    | Not eligible     |
| IF 7  | Upland  | Broad Ridgetop | Historic    | Not eligible     |
| IF 8  | Upland  | Ridge Spur     | Historic    | Not eligible     |
| IF 9  | Upland  | Saddle         | Historic    | Not eligible     |
| IF 12 | Upland  | Saddle         | Historic    | Not eligible     |
| IF 13 | Upland  | Bench          | Historic    | Not eligible     |
| IF 14 | Upland  | Bench          | Historic    | Not eligible     |
| IF 15 | Upland  | Bench          | Historic    | Not eligible     |
| IF 16 | Upland  | Ridgetop       | Historic    | Not eligible     |
| IF 17 | Upland  | Ridgetop       | Historic    | Not eligible     |
| IF 18 | Upland  | Ridgetop       | Historic    | Not eligible     |
| IF 19 | Upland  | Ridgetop       | Historic    | Not eligible     |
| IF 20 | Upland  | Ridgetop       | Historic    | Not eligible     |
| IF 21 | Upland  | Ridgetop       | Historic    | Not eligible     |
| IF 22 | Upland  | Broad Ridgetop | Historic    | Not eligible     |
| IF 23 | Upland  | Broad Ridgetop | Historic    | Not eligible     |
| IF 24 | Upland  | Broad Ridgetop | Historic    | Not eligible     |
| IF 25 | Upland  | Ridgetop       | Historic    | Not eligible     |
| IF 26 | Upland  | Broad Ridgetop | Historic    | Not eligible     |
| IF 27 | Upland  | Broad Ridgetop | Historic    | Not eligible     |
| IF 28 | Upland  | Broad Ridgetop | Historic    | Not eligible     |

**Notes:**

IF numbers are not sequential (numbers 4, 10 and 11 do not appear).

IF = Isolated Find

NRHP = National Register of Historic Places

**Table 2.5-41—{Summary of Potentially Eligible Archaeological Sites <sup>(a)</sup>}**

(Page 1 of 1)

| Site<br>(MHT No.)   | Site Type                       | Age   | NRHP Status       | Recommended Action |
|---------------------|---------------------------------|---|-------------------|--------------------|
| Site 1<br>(18CV474) | Artifact Scatter/<br>Foundation | 19 <sup>th</sup> century                                  | Insufficient Data | Avoid/Phase II     |
| Site 7<br>(18CV480) | Domestic Site                   | Mid 19 <sup>th</sup> to 20 <sup>th</sup> century          | Insufficient Data | Avoid/Phase II     |
| Site 8<br>(18CV481) | Domestic Site                   | 19 <sup>th</sup> to early 20 <sup>th</sup> century        | Insufficient Data | Avoid/Phase II     |
| Site 9<br>(18CV482) | Domestic Site                   | Mid 19 <sup>th</sup> to early 20 <sup>th</sup><br>century | Insufficient Data | Avoid/Phase II     |

**Notes:**

NRHP = National Register of Historic Places

MHT = Maryland Historic Trust

<sup>(a)</sup> Based on Maryland SHPO comments

**Table 2.5-42—{Summary of Eligible Architectural Resources <sup>(a)</sup>}**

(Page 1 of 1)

| <b>MHT No.</b> | <b>Name</b>                                      | <b>Date</b> | <b>Resource Type</b>   | <b>Location</b>                   | <b>Recommended NRHP Status</b>   |
|----------------|--|-------------|--|-----------------------------------|--|
| CT-58          | Parran's Park                                    | C1750       | Abandoned Farmstead; 3 tobacco barns                                       | In the 600 acre (243 hectare) APE | NRHP Eligible under Criterion A  |
| CT-59          | Preston's Cliff, Charles's Gift, The Wilson Farm | c1690       | Ruins; 3 tobacco barns and house ruins                                     | In the APE for visual effects     | NRHP Eligible under Criteria A and C   |
| CT-1295        | Baltimore and Drum Point Railroad                | c1890       | Abandoned Railroad; railroad bed   | In the APE                        | Offsite portions determined NRHP eligible; project portions NRHP Eligible under Criteria A and C |
| CT-1312        | Camp Conoy                                       | c1930       | YMCA Camp; 4 buildings, pavilion, playground, swimming pool, tennis courts | In the APE and adjacent area      | NRHP Eligible under Criterion A  |

**Notes:**

NRHP = National Register of Historic Places

MHT = Maryland Historical Trust

<sup>(a)</sup> Based on Maryland SHPO comments



**Table 2.5-43—{Census Block Groups within 50 mi (80 km) of the {CCNPP} Site with Minority and Low Income Populations}**

(Page 1 of 3)

| State / County   | Total<br>Number of<br>Census<br>Block<br>Groups | Number of Minority Census Block Groups |  |       |   |                       |              |                      |          | Number of<br>Low Income<br>Census<br>Block Group |
|------------------|---|--|--|-------|---|-----------------------|--------------|----------------------|----------|--|
|                  |   | Black                                  | American<br>Indian or<br>Alaskan<br>Native | Asian | Native<br>Hawaiian<br>or Other<br>Pacific<br>Islander | Some<br>Other<br>Race | Multi-Racial | Aggregate<br>(Total) | Hispanic |  |
|                  |   |  |  |       |   |                       |              |                      |          |  |
| <b>Maryland:</b> |   |  |  |       |   |                       |              |                      |          |  |
| Anne Arundel     | 240   | 13                                     | 0  | 0     | 0   | 0                     | 0            | 16                   | 2        | 5  |
| Calvert          | 41  | 0                                      | 0  | 0     | 0   | 0                     | 0            | 0                    | 0        | 0  |
| Caroline         | 21  | 1                                      | 0  | 0     | 0   | 0                     | 0            | 1                    | 0        | 0  |
| Charles          | 76  | 6                                      | 0  | 0     | 0   | 0                     | 0            | 10                   | 0        | 0  |
| Dorchester       | 30  | 4                                      | 0  | 0     | 0   | 0                     | 0            | 5                    | 0        | 2  |
| Kent             | 5   | 0                                      | 0  | 0     | 0   | 0                     | 0            | 0                    | 0        | 0  |
| Montgomery       | 49  | 7                                      | 0  | 2     | 0   | 6                     | 0            | 32                   | 16       | 0  |
| Prince Georges   | 471   | 321                                    | 0  | 2     | 0   | 12                    | 0            | 380                  | 34       | 6  |
| Queen Annes      | 18  | 0                                      | 0  | 0     | 0   | 0                     | 0            | 0                    | 0        | 0  |
| St. Mary's       | 55  | 0                                      | 0  | 0     | 0   | 0                     | 0            | 2                    | 0        | 1  |
| Somerset         | 19  | 5                                      | 0  | 0     | 0   | 0                     | 0            | 5                    | 0        | 4  |
| Talbot           | 25  | 1                                      | 0  | 0     | 0   | 0                     | 0            | 1                    | 0        | 0  |
| Wicomico         | 65  | 11                                     | 0  | 0     | 0   | 0                     | 0            | 11                   | 0        | 9  |
| Worcester        | 1   | 0                                      | 0  | 0     | 0   | 0                     | 0            | 0                    | 0        | 0  |
| Subtotal         | 1,116   | 369                                    | 0  | 4     | 0   | 18                    | 0            | 463                  | 52       | 27   |
| <b>Virginia:</b> |   |  |  |       |   |                       |              |                      |          |  |

**Table 2.5-43—{Census Block Groups within 50 mi (80 km) of the {CCNPP} Site with Minority and Low Income Populations}**

(Page 2 of 3)

|                          |     |     |   |    |   |    |   |     |    |    |
|--------------------------|-----|-----|---|----|---|----|---|-----|----|----|
| Accomack                 | 2   | 0   | 0 | 0  | 0 | 0  | 0 | 0   | 0  | 0  |
| Alexandria               | 99  | 9   | 0 | 1  | 0 | 3  | 0 | 33  | 11 | 0  |
| Arlington                | 137 | 8   | 0 | 2  | 0 | 6  | 0 | 20  | 23 | 1  |
| Caroline                 | 3   | 1   | 0 | 0  | 0 | 0  | 0 | 1   | 0  | 1  |
| Essex                    | 9   | 4   | 0 | 0  | 0 | 0  | 0 | 2   | 0  | 0  |
| Fairfax                  | 219 | 7   | 0 | 12 | 0 | 4  | 0 | 38  | 25 | 0  |
| Falls Church             | 3   | 0   | 0 | 0  | 0 | 0  | 0 | 0   | 0  | 0  |
| King and Queen           | 1   | 1   | 0 | 0  | 0 | 0  | 0 | 0   | 0  | 0  |
| King George              | 11  | 0   | 0 | 0  | 0 | 0  | 0 | 0   | 0  | 0  |
| Lancaster                | 8   | 4   | 0 | 0  | 0 | 0  | 0 | 4   | 0  | 0  |
| Middlesex                | 2   | 0   | 0 | 0  | 0 | 0  | 0 | 0   | 0  | 0  |
| Northumberland           | 13  | 3   | 0 | 0  | 0 | 0  | 0 | 0   | 0  | 0  |
| Prince William           | 69  | 4   | 0 | 0  | 0 | 1  | 0 | 10  | 5  | 0  |
| Richmond                 | 6   | 2   | 0 | 0  | 0 | 0  | 0 | 0   | 0  | 0  |
| Stafford                 | 7   | 0   | 0 | 0  | 0 | 0  | 0 | 0   | 0  | 0  |
| Westmoreland             | 16  | 5   | 0 | 0  | 0 | 0  | 0 | 5   | 0  | 1  |
| <b>Subtotal</b>          | 605 | 48  | 0 | 15 | 0 | 14 | 0 | 113 | 64 | 3  |
|                          |     |     |   |    |   |    |   |     |    |    |
| <b>Washington, D.C.:</b> | 433 | 294 | 0 | 3  | 0 | 6  | 0 | 312 | 17 | 35 |
|                          |     |     |   |    |   |    |   |     |    |    |
| Delaware:                |     |     |   |    |   |    |   |     |    |    |
| Kent                     | 1   | 0   | 0 | 0  | 0 | 0  | 0 | 0   | 0  | 0  |
| Sussex                   | 22  | 3   | 0 | 0  | 0 | 0  | 0 | 3   | 0  | 2  |

**Table 2.5-43—{Census Block Groups within 50 mi (80 km) of the {CCNPP} Site with Minority and Low Income Populations}**

(Page 3 of 3)

|                                  |              |            |          |           |          |           |          |            |            |           |
|----------------------------------|--------------|------------|----------|-----------|----------|-----------|----------|------------|------------|-----------|
| Subtotal                         | 23           | 3          | 0        | 0         | 0        | 0         | 0        | 3          | 0          | 2         |
|                                  |              |            |          |           |          |           |          |            |            |           |
| <b>Total Census Block Groups</b> | <b>2,177</b> | <b>714</b> | <b>0</b> | <b>22</b> | <b>0</b> | <b>38</b> | <b>0</b> | <b>891</b> | <b>133</b> | <b>67</b> |

Notes:  
(1) A person of Hispanic/Latino origin may be of any race, and therefore may also be included in the aggregate racial minority percentage.  
(2) Calvert County and St. Mary’s County are in the Region of Influence for socioeconomic impact analysis.

**Table 2.5-44—{Census Block Groups and Percentages of Minority People Within 50 mi (80km) of the {CNPP} Site}**

(Page 1 of 1)

| State / Area                 | Total<br>Number<br>of Census<br>Block<br>Groups | Aggregate<br>(Total)<br>Number of<br>Minority<br>Census<br>Block<br>Groups | African-<br>Americans | Native<br>Americans,<br>Indians, or<br>Alaskans | Asians | Native<br>Hawaiians<br>or Other<br>Pacific<br>Islanders | Some<br>Other<br>Race | Multi-<br>Racial<br>Persons | Aggregate<br>(Total) of<br>Racial<br>Minorities | Percent of<br>Ethnic<br>Minority<br>Hispanic/<br>Latino |
|------------------------------|---|--|-----------------------|---|--------|---|-----------------------|-----------------------------|---|---|
| <b>50-Mile Radius:</b>       |   |  |                       |   |        |   |                       |                             |   |   |
| <b>Maryland</b>              | 1,116   | 463  | 27.89%                | 0.29%   | 3.98%  | 0.04%   | 1.80%                 | 1.96%                       | 35.97%  | 4.30%   |
| <b>Virginia</b>              | 605   | 113  | 19.64                 | 0.30  | 3.69   | 0.06  | 1.96                  | 2.02                        | 27.67   | 4.66  |
| <b>Washington, D.C.</b>      | 433   | 312  | 60.01                 | 0.30  | 2.66   | 0.06  | 3.84                  | 2.35                        | 69.22   | 7.86  |
| <b>Delaware</b>              | 23  | 3  | 19.23                 | 0.35  | 2.07   | 0.04  | 2.02                  | 1.66                        | 25.37   | 4.76  |
| <b>Region of Influence:</b>  |   |  |                       |   |        |   |                       |                             |   |   |
| <b>Calvert County, MD</b>    | 41  | 0  | 13.11                 | 0.30  | 0.88   | 0.03  | 0.49                  | 1.27                        | 16.08   | 1.52  |
| <b>St. Mary's County, MD</b> | 55  | 2  | 13.92                 | 0.34  | 1.80   | 0.08  | 0.61                  | 1.68                        | 18.43   | 2.00  |

**Table 2.5-45—{Census Block Groups and Percentage of Households within 50 mi (80 km) of the {CCNPP} Site with Low Income Populations}**

(Page 1 of 1)

| State / Area                 | Total Number of Census Block Groups | Number of Low Income Census Block Groups | Percentage of Low Income Households in Census Block Groups |
|------------------------------|-------------------------------------|--|--|
| <b>50-Mile Radius:</b>       |                                     |  |  |
| <b>Maryland</b>              | 1,116                               | 27                                       | 8.32%  |
| <b>Virginia</b>              | 605                                 | 3  | 9.61   |
| <b>Washington, D.C.</b>      | 433                                 | 35                                       | 17.11  |
| <b>Delaware</b>              | 23                                  | 2  | 8.75   |
| <b>Total</b>                 | 2,177                               | 67                                       | N/A  |
| <b>Region of Influence:</b>  |                                     |  |  |
| <b>Calvert County, MD</b>    | 41                                  | 0  | 4.11   |
| <b>St. Mary's County, MD</b> | 55                                  | 1  | 6.75   |
| <b>Total</b>                 | <b>96</b>                           | <b>1</b>                                 | <b>N/A</b>   |

**Table 2.5-46—{Estimated Chesapeake Bay Recreational Catches in Metric Tons,  
Maryland and Virginia Combined, 1995 and 2000}**

(Page 1 of 1)

| Fish               | Commercial Catches (mt) |           | Recreational Catches (mt) |         |
|--------------------|-------------------------|-----------|---------------------------|---------|
|                    | 1995                    | 2000      | 1995                      | 2000    |
| American Eel       | 323.6                   | 249.8     | NR                        | NR      |
| Atlantic Croaker   | 3,420.5                 | 6,527.7   | 1,487.5                   | 3,429.4 |
| Atlantic Menhaden  | 319,535.3               | 168,738.9 | NR                        | NR      |
| Atlantic Sturgeon  | N/A                     | N/A       | N/A                       | N/A     |
| Black Drum         | 32.5                    | 28.4      | 77.0                      | 7.8     |
| Black Sea Bass*    | 34,812.8                | 22,788.5  | NR                        | NR      |
| Blue Crab*         | 34,812.8                | 22,788.5  | NR                        | NR      |
| Bluefish           | 292.7                   | 279.9     | 245.6                     | 216.8   |
| Eastern Oyster     | 723.9                   | 1,148.2   | NR                        | NR      |
| Horseshoe Crab     | 9.3                     | 375.2     | NR                        | NR      |
| Mackerels          | 80.1                    | 89.5      | 281.7                     | 47.1    |
| Red Drum           | 1.4                     | 5.6       | 30.1                      | 43.4    |
| Shad/River herring | 182.7                   | 175.3     | NR                        | NR      |
| Spotted Seatrout   | 13.1                    | 18.2      | 81.6                      | 88.7    |
| Striped Bass       | 896.7                   | 2,229.0   | 1,366.8                   | 1,862.7 |
| Summer Flounder    | 1,582.0                 | 1,001.0   | 557.1                     | 773.3   |
| Tautog             | 15.6                    | 8.5       | 330.8                     | 110.9   |
| Weakfish           | 705.1                   | 712.7     | 156.9                     | 531.4   |

**Notes:**

\* = the report gives identical catch levels for these two species, indicating that there is likely an error in the report. Rather than exclude the information, it is presented here assuming that the values are true for one of the species.

mt = metric tons  
NR = not reported  
n/a = not available

**Table 2.5-47—{Chesapeake Bay Recreational Top Five Species Most Commonly Caught and Consumed Fish, Lower Patapsco and Back Rivers, in the Baltimore Region, Maryland, 2004}**

(Page 1 of 1)

| Sample Site / Type of Fish                                  | Fish Caught and Consumed |              |
|---|--------------------------|--------------|
|   | Number                   | Percentage   |
| <b>Back River Sites:</b>                                    |                          |              |
| White Perch   | 9                        | 27.3%        |
| Striped Bass/Rockfish                                       | 8                        | 24.2         |
| Catfish (all)   | 3                        | 9.1          |
| Perched (unspecified)                                       | 3                        | 9.1          |
| All Others  | 10                       | 30.3         |
| Subtotal  | 33                       | 100.0%       |
| <b>Baltimore Harbor/Patapsco River Sites:</b>               |                          |              |
| Striped Bass/Rockfish                                       | 33                       | 28.9%        |
| White Perch   | 23                       | 20.2         |
| Blue Crab/Crab  | 19                       | 16.7         |
| Catfish (all)   | 11                       | 9.6          |
| Croaker   | 7                        | 6.1          |
| All Others  | 21                       | 18.4         |
| Subtotal  | 114                      | 99.9%        |
| <b>Combined Sites:</b>                                      |                          |              |
| White Perch   | 32                       | 21.8%        |
| Striped Bass/Rockfish                                       | 41                       | 27.9         |
| Blue Crab/Crab  | 19                       | 12.9         |
| Catfish (all)   | 14                       | 9.5          |
| Croaker   | 7                        | 4.8          |
| Perched (unspecified)                                       | 3                        | 2.0          |
| All Others  | 31                       | 21.0         |
| <b>Total</b>  | <b>147</b>               | <b>99.9%</b> |
| Note:<br>Numbers may not total 100 percent due to rounding. |                          |              |

**Table 2.5-48—{Chesapeake Bay Recreational Top Five Species Most Commonly Caught and Consumed Fish, Lower Potomac and Anacostia Rivers, in the Washington, D.C. Region, 2004}**

(Page 1 of 1)

| Type of Fish          | Fish Caught and Consumed |               |
|-----------------------|--------------------------|---------------|
|                       | Number                   | Percentage    |
| Catfish (all)         | 59                       | 29.2%         |
| Striped Bass/Rockfish | 35                       | 17.3          |
| Largemouth Bass       | 22                       | 10.9          |
| Crappie               | 20                       | 9.9           |
| Bluegill              | 18                       | 8.9           |
| All Others            | 48                       | 23.8          |
| <b>Total</b>          | <b>202</b>               | <b>100.0%</b> |



**Table 2.5-49—{Chesapeake Bay Recreational Top Ten Species Most Commonly Caught and Consumed Fish, Elizabeth and James Rivers, in the Tidewater Region, Virginia, 2004}**

(Page 1 of 1)

| Type of Fish  | Fish Caught and Consumed |              |
|---|--------------------------|--------------|
|   | Number                   | Percentage   |
| Croaker   | 367                      | 38.1%        |
| Spot  | 186                      | 19.3         |
| Flounder  | 117                      | 12.2         |
| Striped Bass/Rockfish                                       | 76                       | 7.9          |
| Blue Crab   | 60                       | 6.2          |
| Trout   | 53                       | 5.5          |
| Catfish (all)   | 31                       | 3.2          |
| Crabs (unspecified)   | 14                       | 1.5          |
| Drum  | 12                       | 1.2          |
| Bluefish  | 9                        | 0.9          |
| All Others  | 37                       | 3.8          |
| <b>Total</b>  | <b>962</b>               | <b>99.8%</b> |
| Note:<br>Numbers may not total 100 percent due to rounding. |                          |              |

**Table 2.5-50—{Chesapeake Bay Recreational Fishing Characteristics for Minority Populations, Lower Patapsco and Back Rivers, in the Baltimore Region, Maryland, 2004}**

(Page 1 of 1)

| Fishing Characteristics  | Ethnicity / Percentages |                   |         |                    |                   |
|--|-------------------------|-------------------|---------|--------------------|-------------------|
|  | Caucasians              | African-Americans | Asians* | Hispanics/Latinos* | Native Americans* |
| <b>Study Sample Sizes (number / percent) – 135:</b>  | 82 / 64%                | 43 / 33%          | 0 / 0%  | 1 / 0.7%           | 3 / 2%            |
| <b>Fishing Mode:</b>   |                         |                   |         |                    |                   |
| Shore/Pier   | 79%                     | 100%              | N/A     | N/A                | N/A               |
| Boat   | 21                      | 0                 | N/A     | N/A                | N/A               |
| Total  | 100%                    | 100%              | N/A     | N/A                | N/A               |
| <b>Distance Traveled to Fish:</b>  |                         |                   |         |                    |                   |
| Less than 10 mi (16.1 km)  | 85                      | 67                | N/A     | N/A                | N/A               |
| 25 miles or less (40.2 km)   | 99                      | 97                | N/A     | N/A                | N/A               |
| <b>Consumption Over Past Year:</b>   |                         |                   |         |                    |                   |
| Striped Bass/Rockfish  | 27%                     | 10%               | N/A     | N/A                | N/A               |
| White Perch  | 13                      | 17                | N/A     | N/A                | N/A               |
| Blue Crab/Crab   | 11                      | 9                 | N/A     | N/A                | N/A               |
| Catfish (all)  | 7                       | 7                 | N/A     | N/A                | N/A               |
| All Others   | 5                       | 3                 | N/A     | N/A                | N/A               |
| Total  | 63%                     | 46%               | N/A     | N/A                | N/A               |
| <b>Importance (Very and Somewhat) of Subsistence for:</b>  |                         |                   |         |                    |                   |
| Fresh Fish for Dinner  | 54                      | 65                | N/A     | N/A                | N/A               |
| To Reduce Food Expenses  | 17                      | 44                | N/A     | N/A                | N/A               |
| <b>Consume Fish Caught:</b>  | 45                      | 65                | N/A     | N/A                | N/A               |
| <b>Reasons for Non-consumption:</b>  |                         |                   |         |                    |                   |
| Water too polluted   | 43                      | 23                | N/A     | N/A                | N/A               |
| Fish advisories  | 17                      | 7                 | N/A     | N/A                | N/A               |
| Note:<br>N/A = not available<br>*The samples sizes are too small to draw conclusions for these subgroups, so detailed analyses either were not conduct for all ethnic groups, or conclusions should not be drawn from any percentages presented. |                         |                   |         |                    |                   |

**Table 2.5-51—{Chesapeake Bay Recreational Fishing Characteristics for Minority Populations, Lower Potomac and Anacostia Rivers, in the Washington, D.C. Region, 2004}**

(Page 1 of 1)

| Fishing Characteristics  | Ethnicity / Percentages |                   |           |                   |           |
|--|-------------------------|-------------------|-----------|-------------------|-----------|
|  | Caucasians              | African-Americans | Asians    | Hispanics/Latinos | Others*   |
| <b>Study Sample Sizes (number / percent) - 247:</b>  | 79 / 32.0%              | 121 / 49.0%       | 14 / 5.7% | 23 / 9.3%         | 10 / 4.0% |
| <b>Fishing Mode:</b>   |                         |                   |           |                   |           |
| Shore/Pier   | 35%                     | 96%               | 86%       | 100%              | 60%       |
| Boat   | 65                      | 4                 | 14        | 0                 | 40        |
| Total  | 100%                    | 100%              | 100%      | 100%              | 100%      |
| <b>Distance Traveled to Fish:</b>  |                         |                   |           |                   |           |
| Less than 10 mi (16.1 km)  | 54                      | 83                | 64        | 48                | n/a       |
| Less than 25 mi (40.2 km)  | > 75%                   | > 83%             | > 75%     | > 75%             | > 75%     |
| <b>Fishing More than 50 Times Last Year:</b>   | 17                      | 25                | 14        | N/A               | N/A       |
| <b>Importance (Very only) of Subsistence for:</b>  |                         |                   |           |                   |           |
| Fresh Fish for Dinner  | 11                      | 24                | 23        | 39                | 20        |
| To Reduce Food Expenses  | 13                      | 12                | 0         | 26                | 0         |
| <b>Consume Fish Caught:</b>  | 30                      | 36                | 64        | 43                | 40        |
| <b>Reasons for Non-consumption:</b>  |                         |                   |           |                   |           |
| Water too polluted   | 51                      | 37                | 31        | 38                | N/A       |
| Fish advisories  | 4                       | 8                 | 0         | 5                 | N/A       |
| Note:<br>N/A = not available<br>*The samples sizes are too small to draw conclusions for these subgroups, so detailed analyses either were not conduct for all ethnic groups, or conclusions should not be drawn from any percentages presented. |                         |                   |           |                   |           |

**Table 2.5-52—{Chesapeake Bay Recreational Fishing Characteristics for Minority Populations, Elizabeth and James Rivers, in the Tidewater Region, Virginia, 2004}**

(Page 1 of 1)

| Fishing Characteristics                             | Ethnicity / Percentages |                   |          |                      |                   |
|---|-------------------------|-------------------|----------|----------------------|-------------------|
|   | Caucasians              | African-Americans | Asians*  | Hispanics / Latinos* | Native Americans* |
| <b>Study Sample Sizes (number / percent) – 493:</b> | 277 / 56%               | 207 / 42%         | 1 / 0.2% | 5 / 1%               | 4 / 0.8%          |
| <b>Fishing Mode:</b>                                |                         |                   |          |                      |                   |
| Shore   | 13%                     | 11%               | N/A      | N/A                  | N/A               |
| Pier  | 25                      | 60                | N/A      | N/A                  | N/A               |
| Boat  | 61                      | 28                | N/A      | N/A                  | N/A               |
| Total   | 99%                     | 99%               | N/A      | N/A                  | N/A               |
| <b>Distance Traveled to Fish:</b>                   |                         |                   |          |                      |                   |
| Less than 10 mi (16.1 km)                           | 44                      | 48                | N/A      | N/A                  | N/A               |
| Greater than 100 mi (160.1 km)                      | 25                      | 26                | N/A      | N/A                  | N/A               |
| <b>Number of Times Fished Last Year:</b>            |                         |                   |          |                      |                   |
| <b>Importance of Subsistence for:</b>               |                         |                   |          |                      |                   |
| Fresh Fish for Dinner                               |                         |                   |          |                      |                   |
| Very Important                                      | 47%                     | 53%               | N/A      | 20%                  | 75%               |
| Somewhat Important                                  | 32                      | 26                | N/A      | 40                   | 0                 |
| Subtotal  | 79%                     | 79%               | N/A      | 60%                  | 75%               |
| To Reduce Food Expenses                             |                         |                   |          |                      |                   |
| Very Important                                      | 14%                     | 26                | N/A      | 20%                  | 25%               |
| Somewhat Important                                  | 20                      | 26                | N/A      | 20                   | 0                 |
| Subtotal  | 34%                     | 52%               | N/A      | 40%                  | 25%               |
| <b>Consume Fish Caught:</b>                         | 90                      | 94                | N/A      | 80                   | 100               |
| <b>Reasons for Non-consumption:</b>                 |                         |                   |          |                      |                   |
| Water too polluted                                  | N/A                     | N/A               | N/A      | N/A                  | N/A               |
| Fish advisories                                     | N/A                     | N/A               | N/A      | N/A                  | N/A               |

Note:

N/A = not available

The samples sizes are too small to draw conclusions for these subgroups, so detailed analyses either were not conduct for all ethnic groups, or conclusions should not be drawn from any percentages presented.

**Table 2.5-53—{Chesapeake Bay Recreational Fishing Characteristics for Low Income Populations, Lower Potomac and Anacostia Rivers, in the Washington, D.C. Region, 2004}**

(Page 1 of 1)

| Fishing Characteristics                             | Annual Household Income Levels / Percentages |                     |                     |                  |
|---|--|---------------------|---------------------|------------------|
|   | \$20,000 or Less                             | \$20,001 - \$40,000 | \$40,001 - \$80,000 | \$80,001 or More |
| <b>Study Sample Sizes (number / percent) – 247:</b> | 9%   | 22%                 | 31%                 | 39%              |
| <b>Fishing Mode:</b>                                |  |                     |                     |                  |
| Shore/Pier  | 100%   | N/A                 | N/A                 | 49%              |
| Boat  | 0  | N/A                 | N/A                 | 51               |
| Total   | 100%   | N/A                 | N/A                 | 100%             |
| <b>Distance Traveled to Fish:</b>                   | N/A  | N/A                 | N/A                 | N/A              |
| Less than 10 mi (16.1 km)                           | N/A  | 85% (\$40K or less) | 62% (\$40K or more) | N/A              |
| <b>Number of Times Fished Last Year:</b>            | N/A  | N/A                 | N/A                 | N/A              |
| <b>Importance (Very only) of Subsistence for:</b>   | N/A  | N/A                 | N/A                 | N/A              |
| Fresh Fish for Dinner                               | N/A  | N/A                 | N/A                 | N/A              |
| To Reduce Food Expenses                             | N/A  | 17% (\$40K or less) | 3% (\$40K or more)  | N/A              |
| <b>Consume Fish Caught:</b>                         | 30   | 46                  | 36                  | 33               |
| <b>Reasons for Non-consumption:</b>                 | N/A  | N/A                 | N/A                 | N/A              |
| Water too polluted                                  | N/A  | N/A                 | N/A                 | N/A              |
| Fish advisories                                     | N/A  | N/A                 | N/A                 | N/A              |
| Note:<br>N/A = not available                        |  |                     |                     |                  |

**Table 2.5-54—{Chesapeake Bay Recreational Fishing Characteristics for Low Income Populations, Elizabeth and James Rivers, in the Tidewater Region, Virginia, 2004}**

(Page 1 of 1)

| Fishing Characteristics                             | Annual Household Income Levels / Percentages |                     |                     |                  |
|---|--|---------------------|---------------------|------------------|
|   | \$20,000 or Less                             | \$20,001 - \$40,000 | \$40,001 - \$80,000 | \$80,001 or More |
| <b>Study Sample Sizes (number / percent) – 493:</b> | 44 / 9%                                      | 138 / 28%           | 202 / 41%           | 109 / 22%        |
| <b>Fishing Mode:</b>                                |  |                     |                     |                  |
| Shore   | 18%  | 13%                 | 13%                 | 12%              |
| Pier  | 51   | 46                  | 40                  | 28               |
| Boat  | 31   | 40                  | 46                  | 60               |
| Total   | 100%   | 99%                 | 99%                 | 100%             |
| <b>Distance Traveled to Fish:</b>                   |  |                     |                     |                  |
| Less than 10 mi (16.1 km)                           | N/A  | N/A                 | N/A                 | N/A              |
| Less than 25 mi (40.2 km)                           | N/A  | N/A                 | N/A                 | N/A              |
| <b>Number of Times Fished Last Year:</b>            | N/A  | N/A                 | N/A                 | N/A              |
| <b>Importance (Very only) of Subsistence for:</b>   | N/A  | N/A                 | N/A                 | N/A              |
| Fresh Fish for Dinner                               | 64   | 56                  | 50                  | 38               |
| To Reduce Food Expenses                             | 41   | 29                  | 14                  | 11               |
| <b>Consume Fish Caught:</b>                         |  |                     |                     |                  |
| <b>Reasons for Non-consumption:</b>                 |  |                     |                     |                  |
| Water too polluted                                  |  |                     |                     |                  |
| Fish advisories                                     |  |                     |                     |                  |
| Note:<br>N/A = not available                        |  |                     |                     |                  |

Figure 2.5-1—{CCNPP Site 50 mi (80 km) Vicinity}

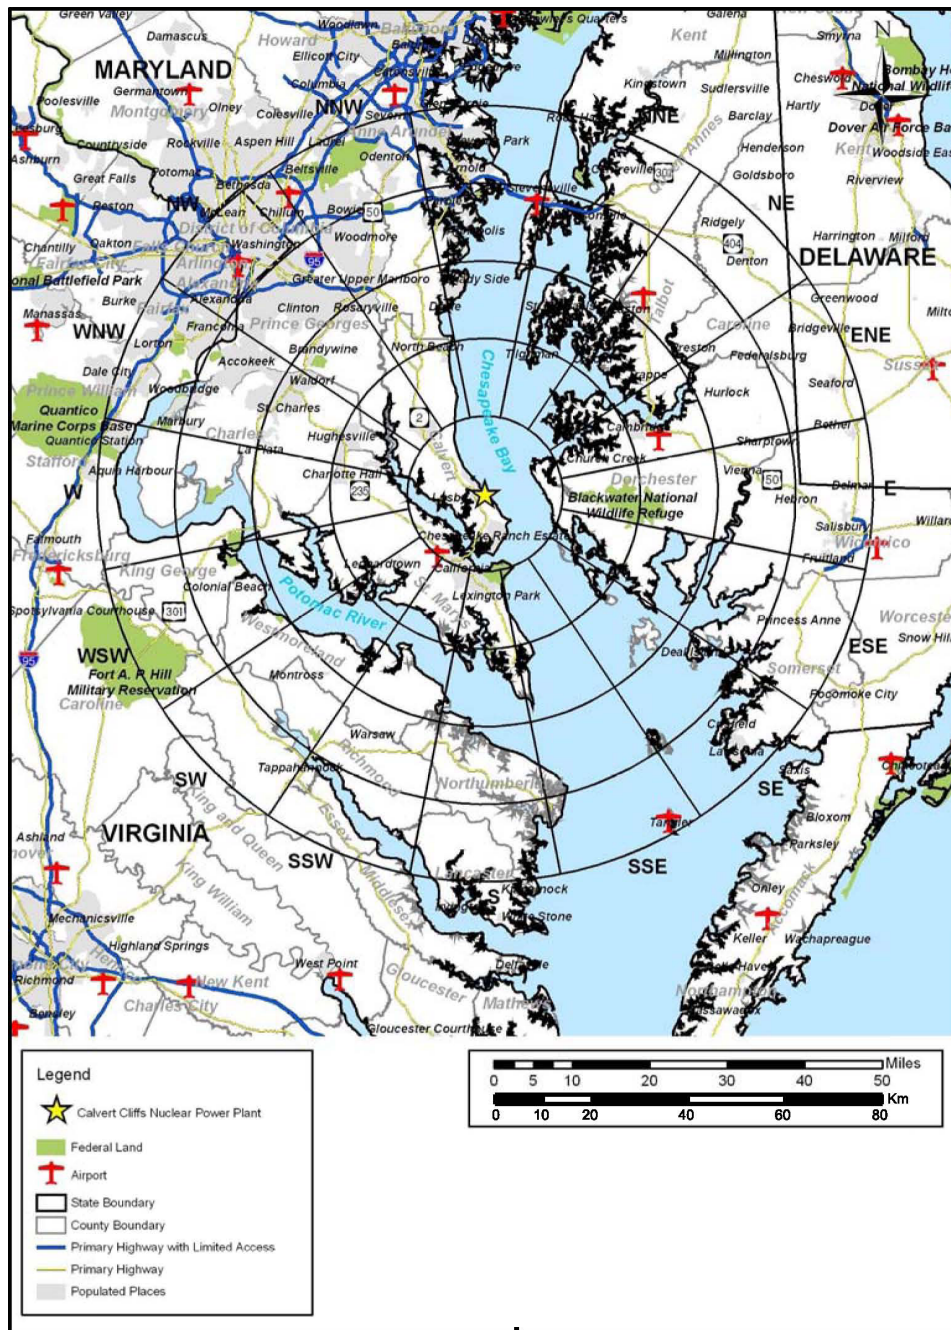
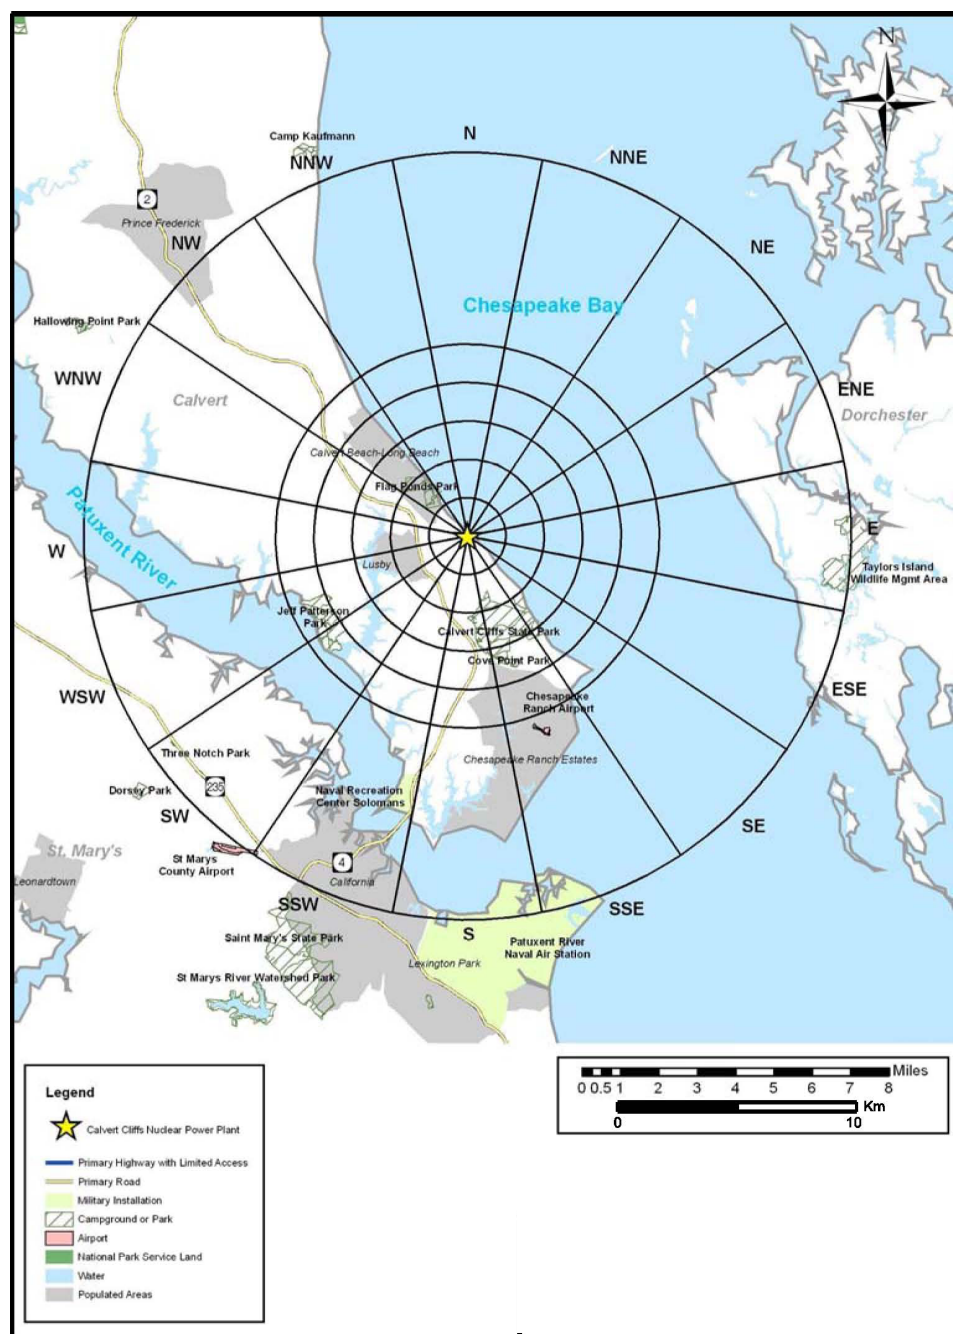


Figure 2.5-2—{CCNPP Site 10 mi (16 km) Vicinity}





**Figure 2.5-3—{CCNPP Units 1, 2 and 3 Low Population Zone}**

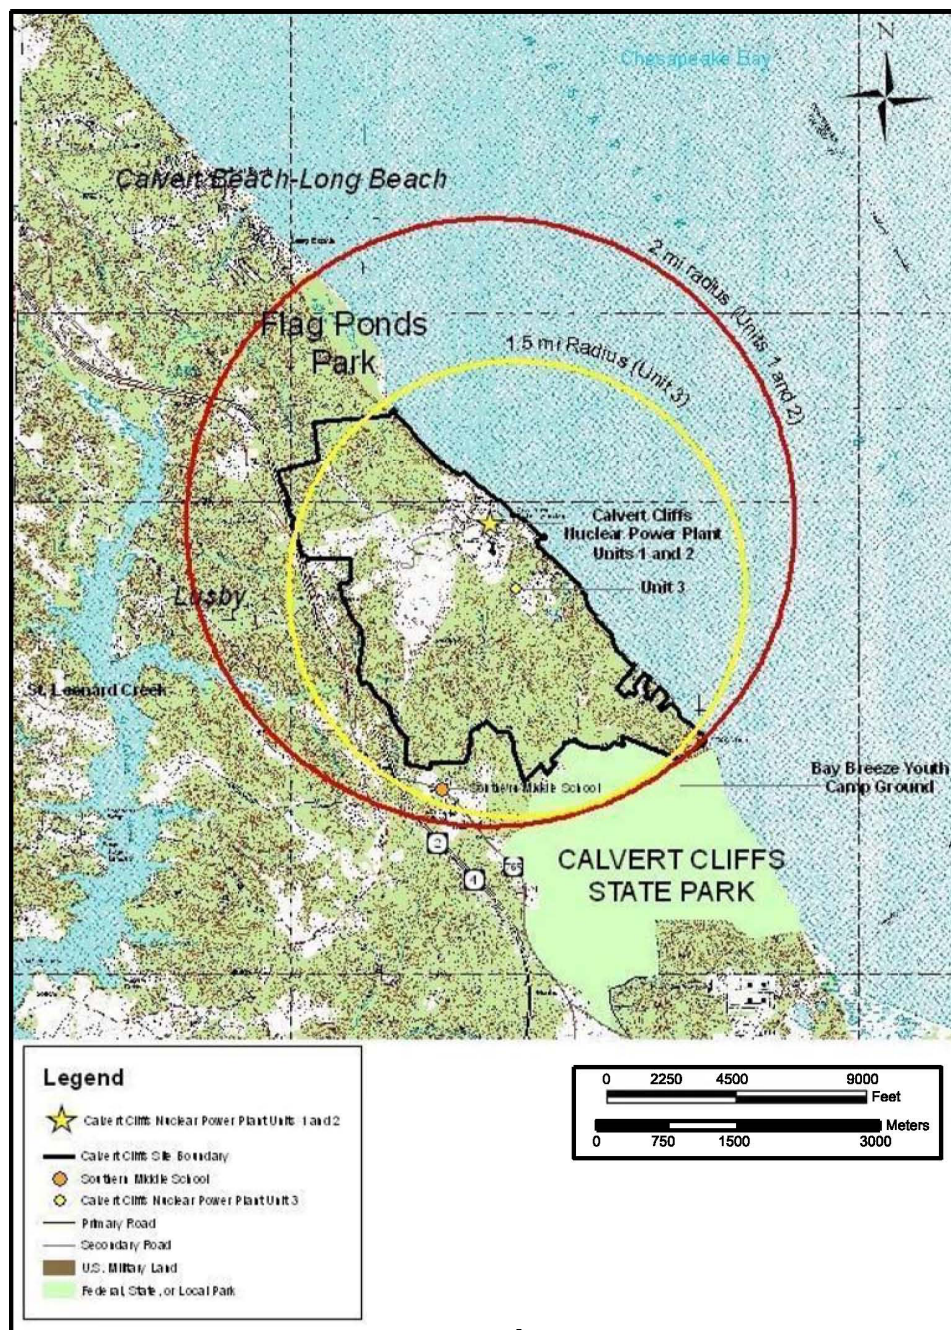


Figure 2.5-4—{Black or African American Minority Population}

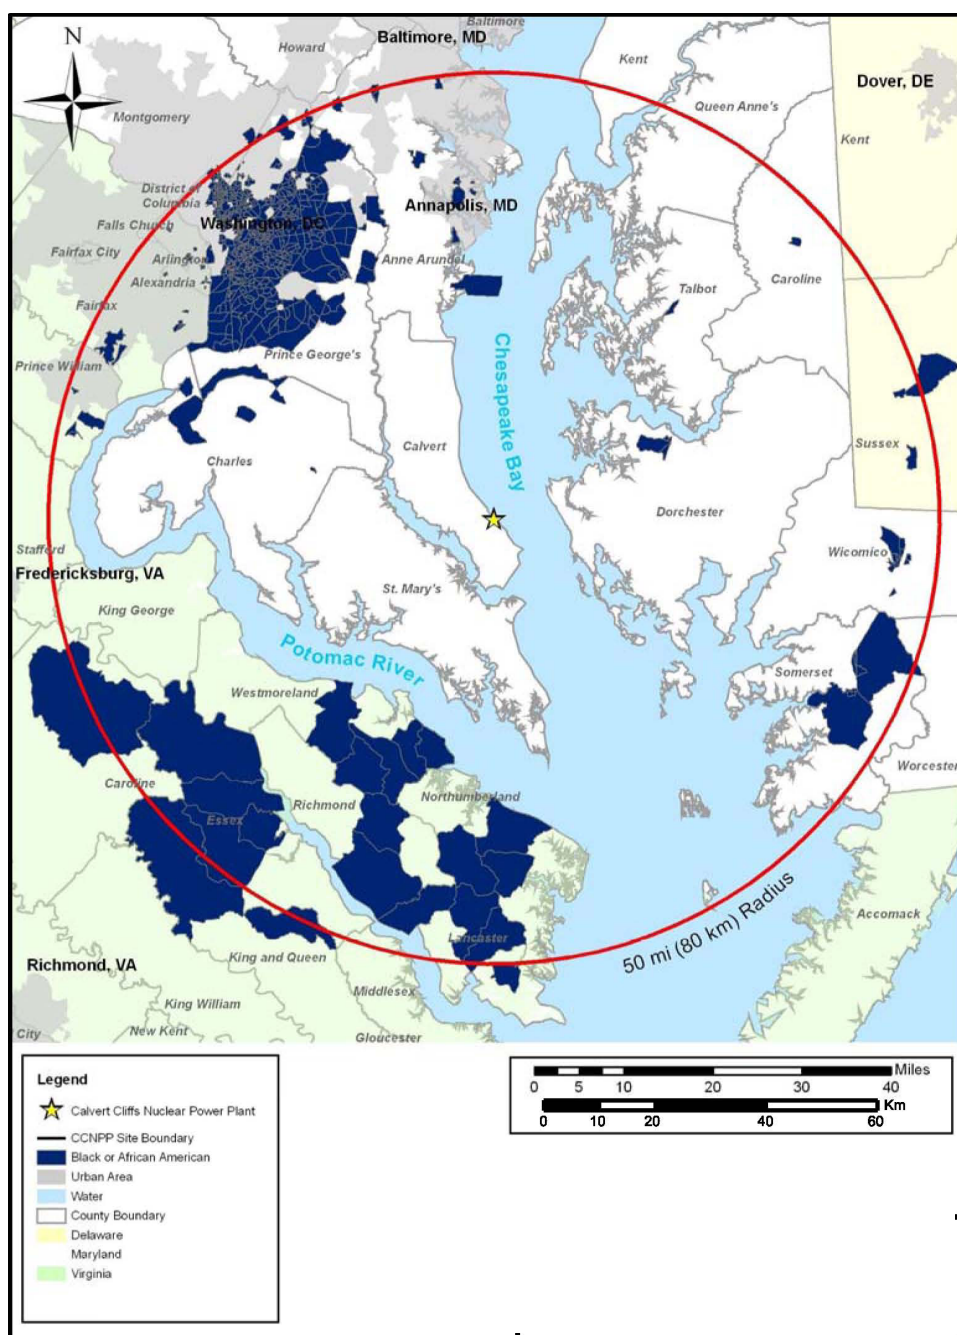




Figure 2.5-5—{Asian Minority Population}

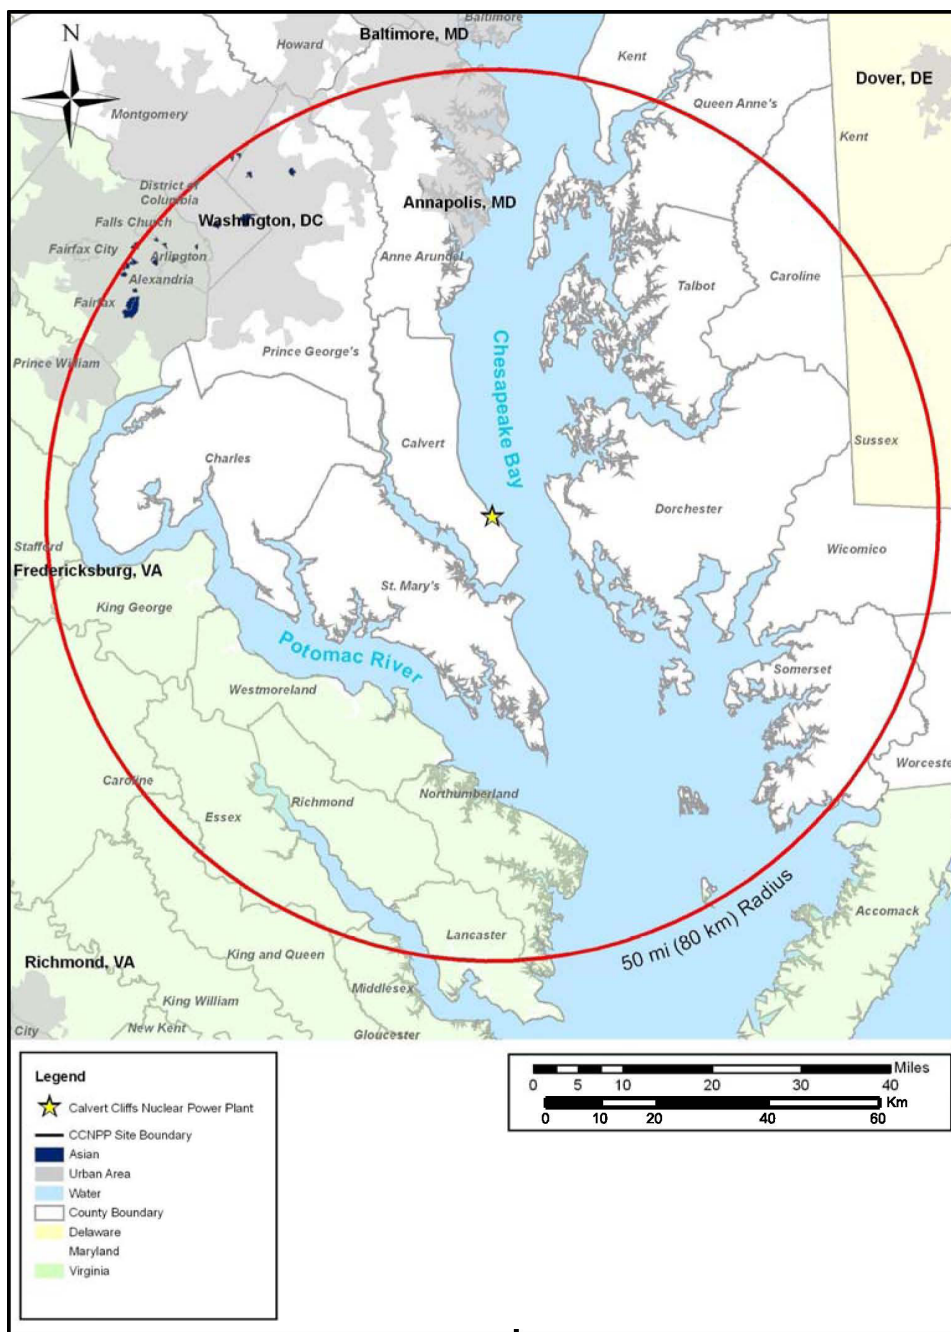


Figure 2.5-6—{Some Other Minority Population}

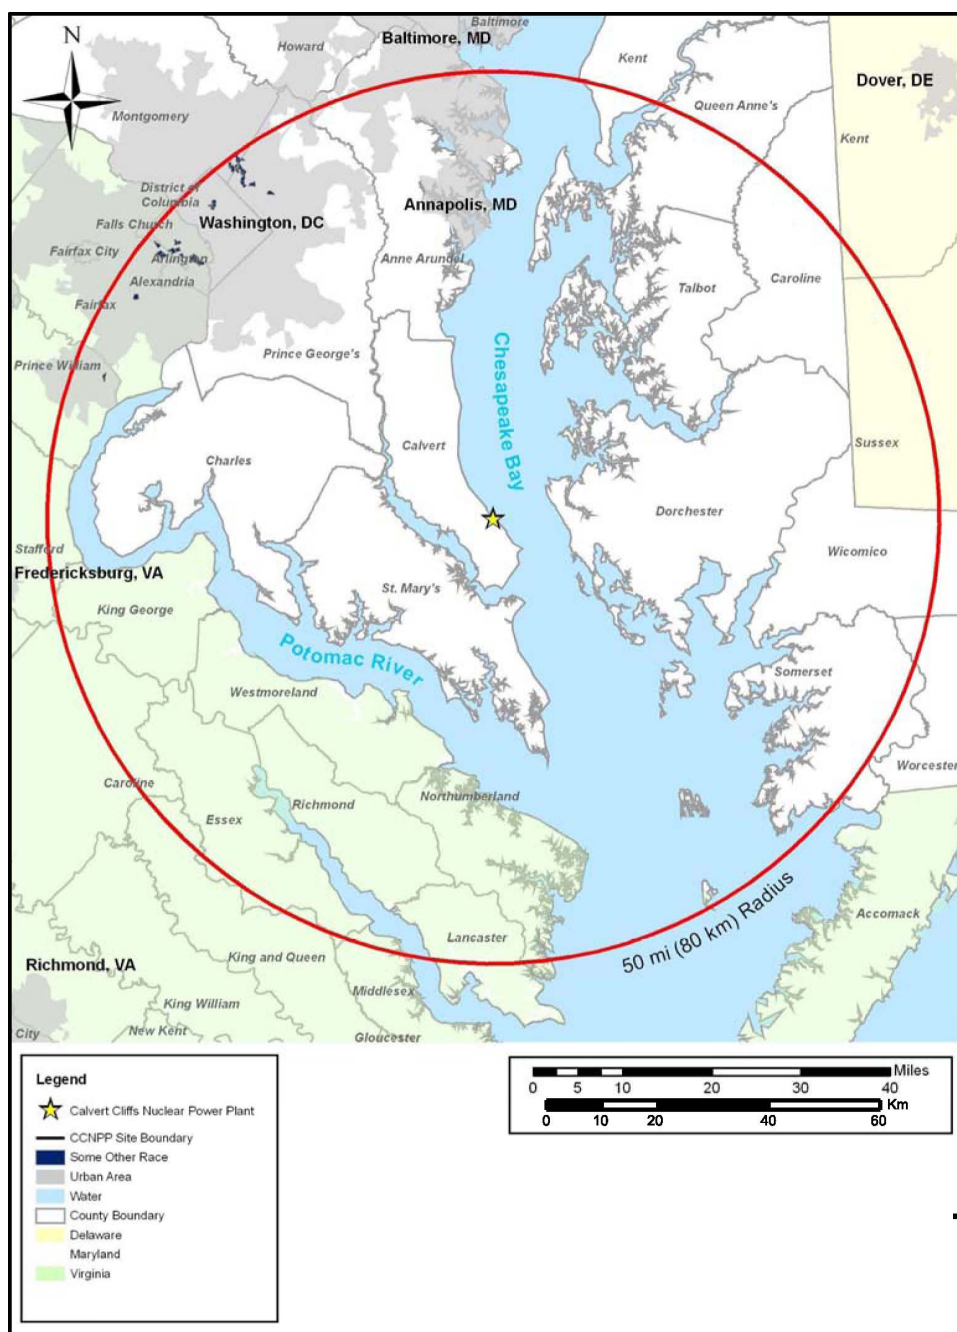


Figure 2.5-7—{Aggregate Minority Population}

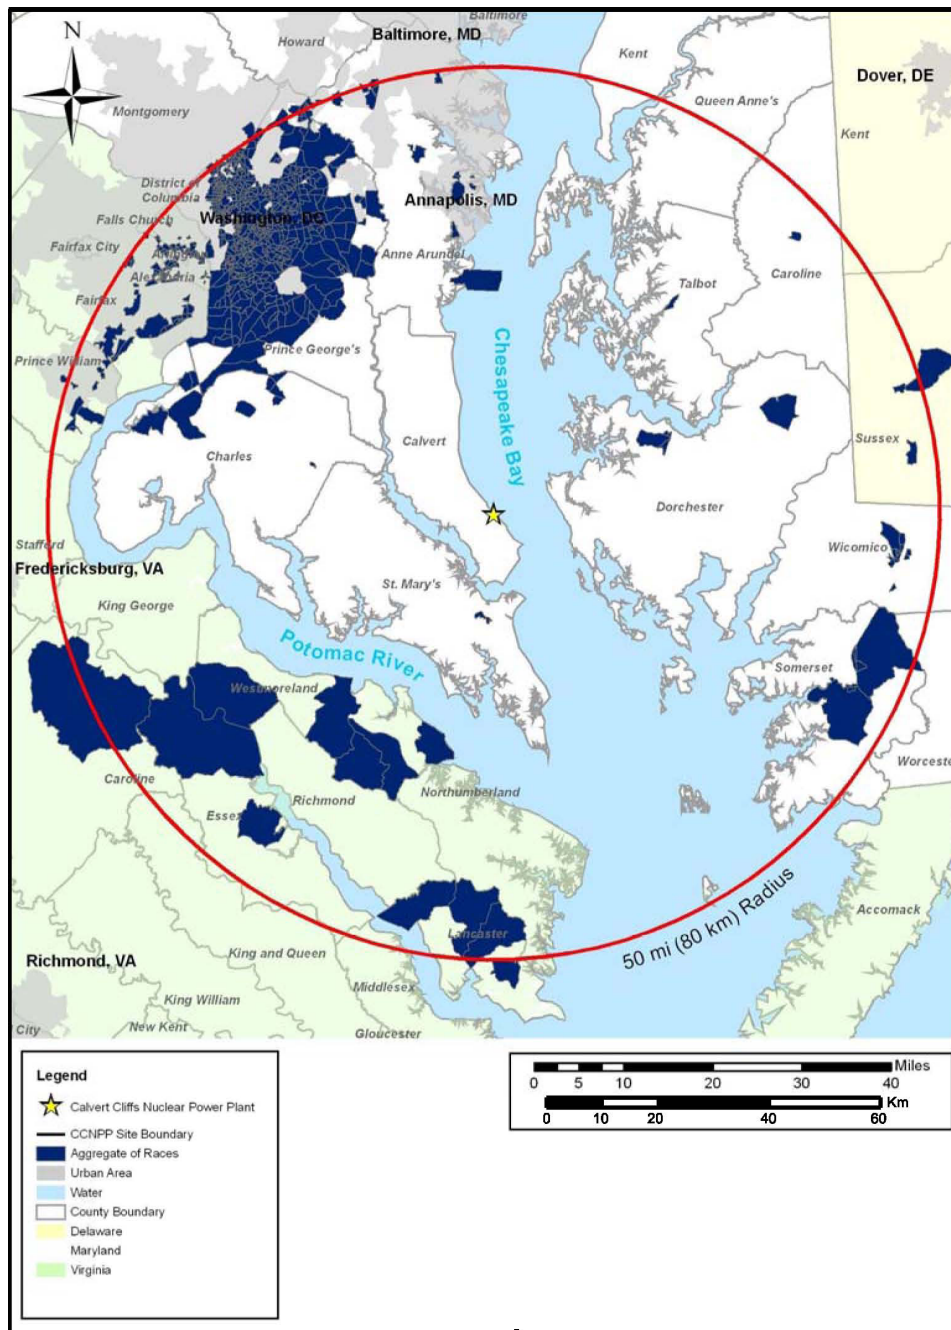


Figure 2.5-8—{Hispanic Ethnicity Minority Population}

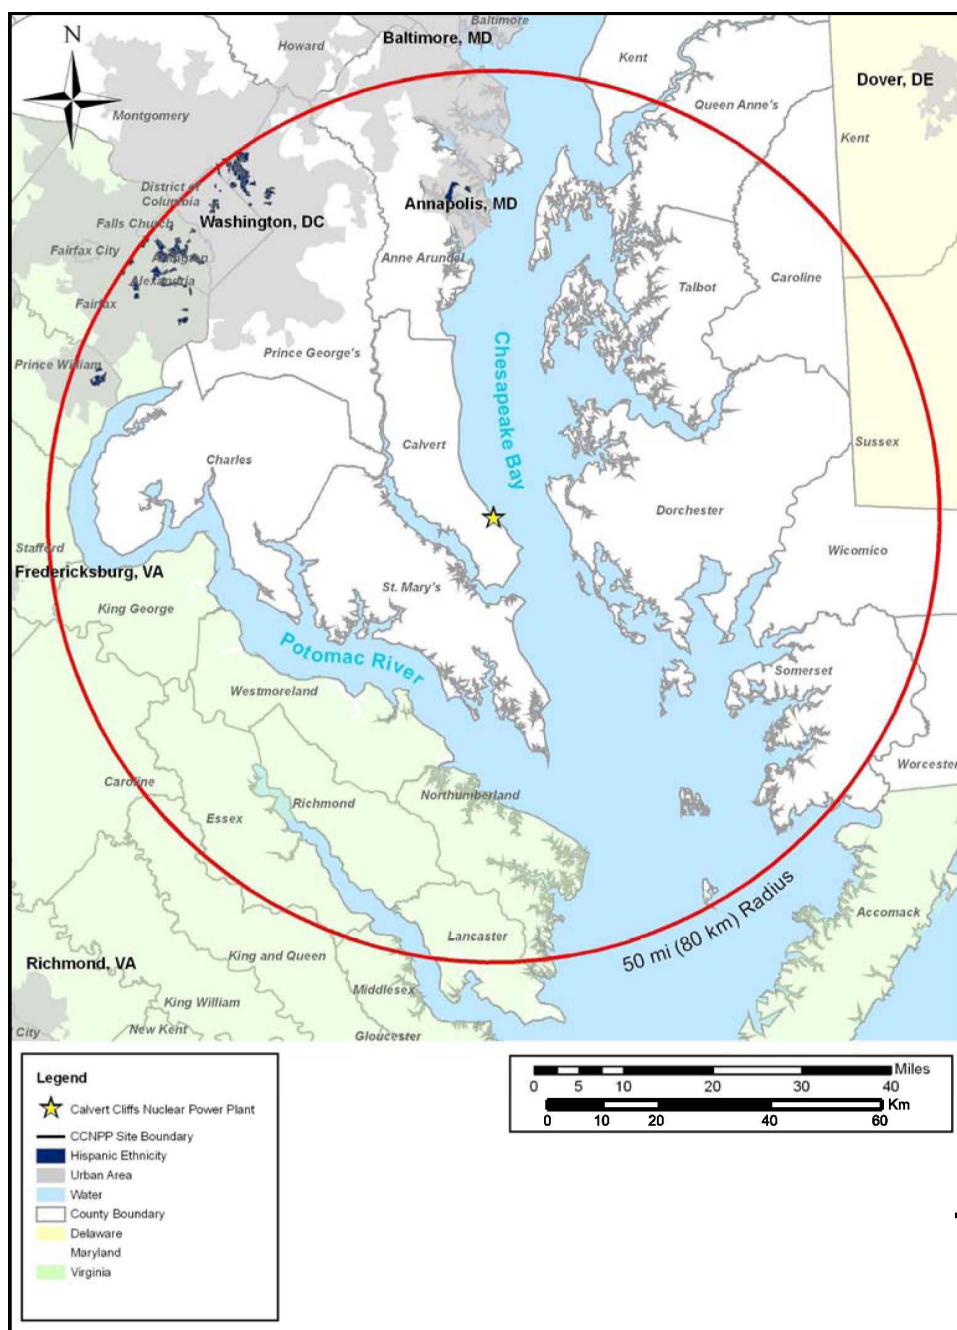




Figure 2.5-9—{Low Income Population}

