


BARTON C. MARCY JR. | DEAN E. FLETCHER | F. DOUGLAS MARTIN

MICHAEL H. PALLER | MARCEL J. M. REICHERT | PHOTOGRAPHS BY DAVID E. SCOTT

# FISHES *of the*

## *Middle Savannah River Basin*

WITH EMPHASIS ON THE SAVANNAH RIVER SITE

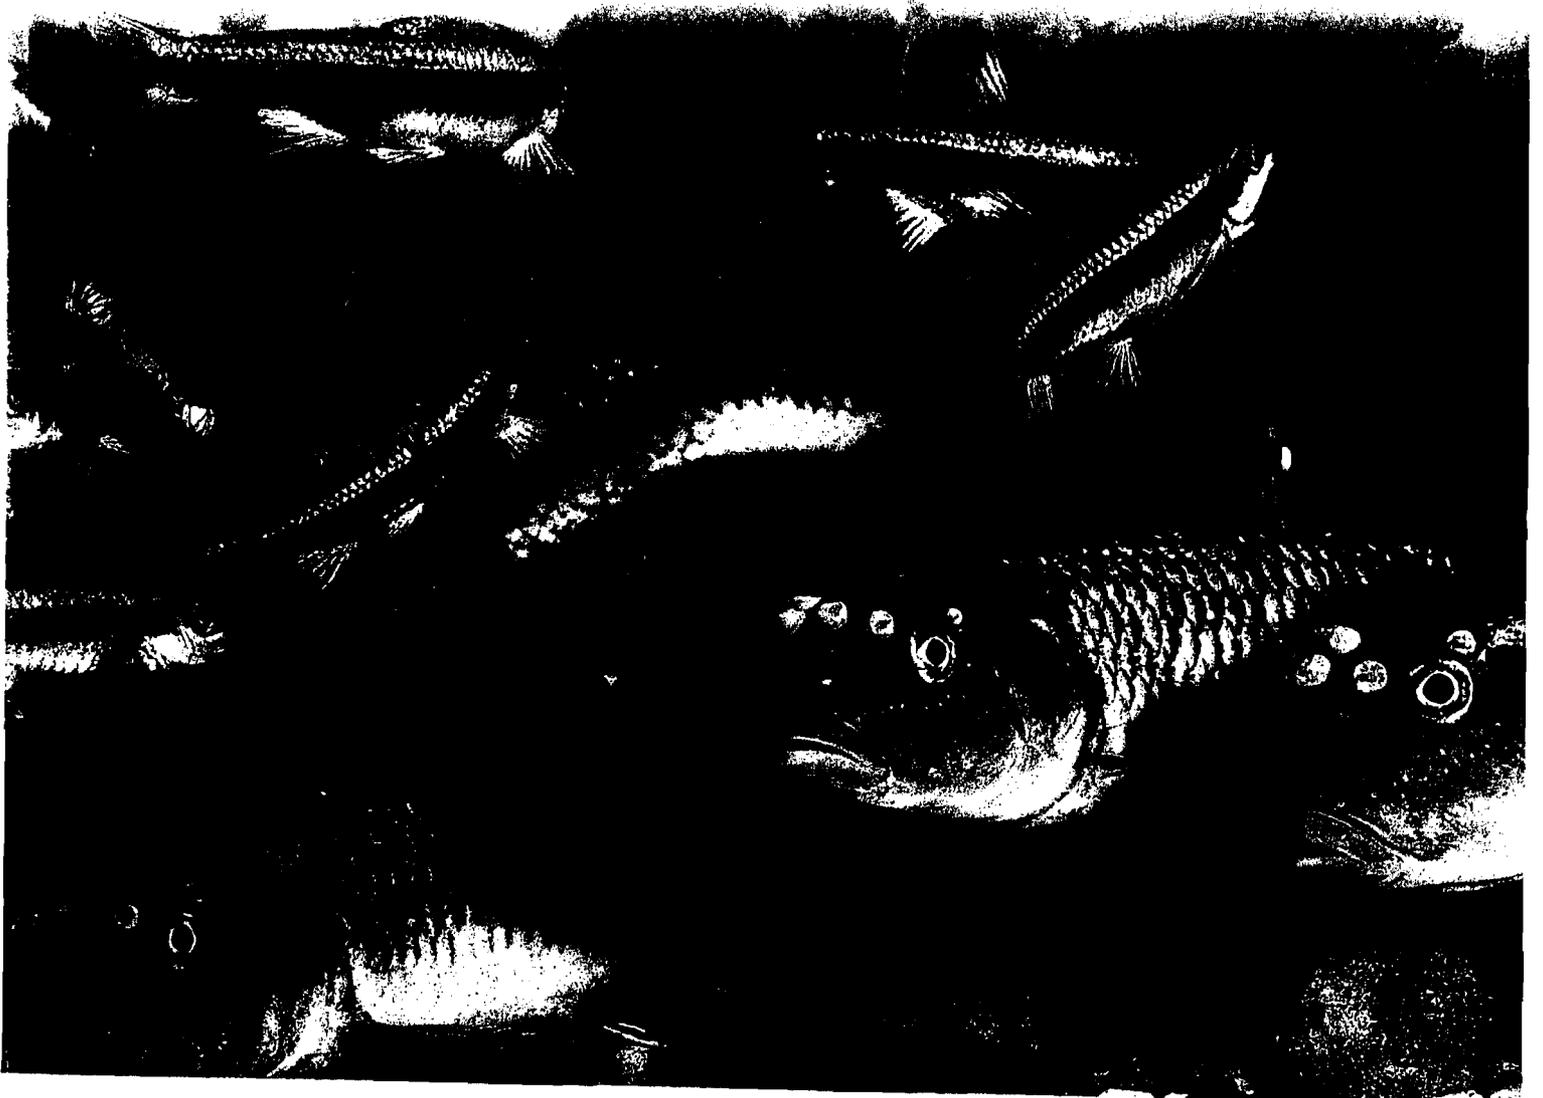

# Fishes of the Middle Savannah River Basin

*With Emphasis on the  
Savannah River Site*

BARTON C. MARCY JR.

DEAN E. FLETCHER

F. DOUGLAS MARTIN

MICHAEL H. PALLER

MARCEL J. M. REICHERT

PHOTOGRAPHS BY

DAVID E. SCOTT

The University of Georgia Press  
Athens and London

© 2005 by the University of Georgia Press  
Athens, Georgia 30602  
All rights reserved

Designed by April Leidig-Higgins  
Set in Adobe Caslon by Copperline Book Services, Inc.  
Printed and bound by Four Colour Imports, LTD

The paper in this book meets the guidelines for permanence and durability of the Committee on Production Guidelines for Book Longevity of the Council on Library Resources.

Printed in China

09 08 07 06 05 04 03 02 01

Library of Congress Cataloging-in-Publication Data  
Marcy, Barton C.

Fishes of the Middle Savannah River Basin : with emphasis on the Savannah River site / Barton C. Marcy Jr., [et al.] ; photographs by David E. Scott.

p. cm.

Includes index.

ISBN 0-8203-2535-X (hardcover : alk. paper)

I. Fishes—Savannah River Watershed (Ga. and S.C.)

I. Title.

QL628.S28M37 2005

597'.09758'1—dc22

2004007658

British Library Cataloging-in-Publication Data available





## Introduction

Our book is based primarily on fisheries studies from 1879 to 2002 in the middle Savannah River basin (MSRB) and studies since 1950 on the U.S. Department of Energy's Savannah River Site (SRS). This book significantly expands *The Fishes of the Savannah River Plant: National Environmental Research Park* (Bennett and McFarlane 1983), which reported on 79 fish species collected on the SRS. Our book enlarges the geographical focus to include the portion of the Savannah River basin that is hydrologically and physiographically similar to the SRS and is the subject of more studies and the source of more data.

Our book comprises habitat characterizations, family descriptions, species accounts, habitat and species photographs, and a taxonomic identification key. We address 24 fish families that include 98 native or introduced fish species historically collected in the MSRB, and list 86 fish species collected specifically on the SRS since the 1950s. Of the 98 species covered in this book, 84 are native (Warren et al. 2000). Thus, this book covers approximately 70% of the native species found in the entire Savannah River drainage. A brief account of each family is followed by accounts of all species of that family found in the MSRB.

The study area comprises the stream reaches corresponding to the U.S. Geological Survey's hydrological unit codes (HUC) 03060106 (the Middle Savannah River) and 03060108 (Brier Creek). This area includes the Savannah River and its tributaries from the Fall Line just above Kiokec Creek in Columbia County (about 6 km below Clarks Hill Dam), Georgia, to the mouth of Brier

Creek (river kilometers [rkms] 156–355) and all of the Brier Creek drainage. This represents all of the Savannah River drainage area on the Upper Coastal Plain plus small areas at the edge of the Lower Coastal Plain. Stevens Creek, in Edgefield and McCormick counties, South Carolina, while part of HUC 03060106, is not included because it is a Piedmont stream with a fish species assemblage more similar to that of the upper Savannah River basin.

### Geographical and Historical Perspectives

The Savannah River lies in an area of the United States with high fish species diversity. The Savannah River basin is home to at least 118 native fish species (Warren et al. 2000), equal to the number of native freshwater fish species found in all of Kansas and more than the number found in 14 western states and 8 northeastern states (Warren and Burr 1994). The Edisto River basin, which adjoins the Savannah River basin to the east, has a reported (collected and identified) fish fauna of 87 species (25 families) in its freshwater portion and 120 species (52 families) in its saltwater portion (Marcy and O'Brien-White 1995).

Fifteen of the 98 species that are found in the MSRB and covered here were introduced into the area, mostly for fisheries purposes. The effects of these fish on the 84 native species are largely unknown. Several species should have no effect because they have little chance of becoming established in the MSRB. Examples are the grass carp, which is being introduced as triploid sterile indi-

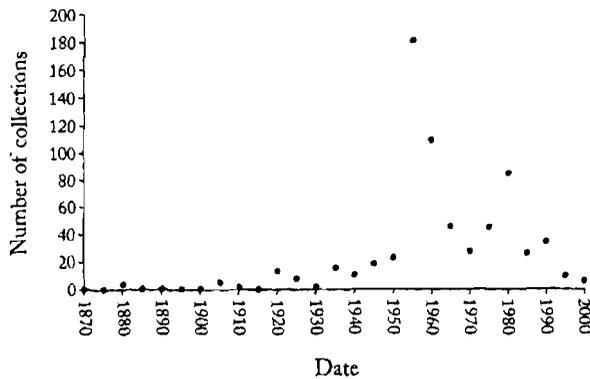


FIGURE 2. Number of individual collections of MSRFB fishes held in museums. *Note:* A collection is considered here to be all species of fish taken from one location on one date. Collection numbers are grouped by 5-year intervals.

use of fertilizer and other agricultural chemicals as well as some shifting to silviculture and development of smaller “bedroom communities.” Major industries that might influence water quality in the Savannah River in addition to SRS activities are textile mills, polystyrene foam and paper product plants, chemical processing plants, and a commercial nuclear power plant, Plant Vogtle.

The first surveys of the fish fauna in the middle Savannah River began in the late 1800s. Map 4 shows the locations where the historical fish samples (1879–2002) that were used in preparing fish species distribution maps for our book were collected. Our sources of data were museum collections, reports in peer-reviewed journals, and unpublished reports from SRS monitoring programs and South Carolina, Georgia, and Plant Vogtle environmental monitoring reports and databases. The appendix lists museum and agency sources of collection data supporting the species distribution data and maps.

Few of the museum specimens from this geographical area were collected prior to the 1920s, and most, as indicated by museum holdings, were collected post-1945 (see Figure 2). The greatest sampling efforts seem to have been in conjunction with various projects to characterize the fauna of the SRS and the environmental impacts of its operation. These projects began just prior to the start of SRS construction (1950).

In addition to specimens placed in museums, the Savannah River Ecology Laboratory, the Savannah River National Laboratory, and various environmental subcontractors have created published and unpublished reports

(about 500). Those that give exact locations for species sampled and were judged to be probably correct in species identifications were used in our analysis of local distributions. In addition, South Carolina and Georgia state agencies have sampled this area, and they made reports and data files available to us for these analyses. The appendix lists the reports, data files, and publications used.

## Native Fish Species

The native species of the MSRFB can be divided into four categories: (1) resident species that are present for all life stages, (2) diadromous (catadromous or anadromous) species that are present only for certain life stages, (3) marine species that penetrate rivers up to the Fall Line either regularly or as strays, and (4) upland species that sometimes stray below the Fall Line. Table 3 summarizes the native species falling into each category. Of the marine species included in our book, the mountain mullet and the tarpon are rare or infrequently collected and the others are part of the regular summer and fall fauna of the MSRFB.

## Introduced Fish Species

The introduced species can likewise be divided into categories (Table 4): (1) persistently abundant and established, (2) rare and possibly not established or established only in restricted areas, (3) definitely not established, and (4) too little information to determine status.

## General Distribution within the Region

Each of the species considered in this book has its own distribution pattern within the MSRFB, but most fit into one of four categories. For the benefit of this discussion we use the following definitions taken from Conner and Suttkus 1986:

“river”—flowing body of water with an average width of 70 m or more at mean low stage;

“stream”—flowing body of water with an average width of 10–70 m at mean low stage;

“creek”—flowing body of water with an average width less than 10 m at mean low stage; and

“swamp”—sluggishly flowing or lentic features asso-

TABLE 3. Native resident, diadromous, marine, and upland fish species of the MSRB (listed in phylogenetic order).

	Scientific name	Common name
Resident species		
Lepisosteidae	<i>Lepisosteus osseus</i>	longnose gar
	<i>Lepisosteus platyrhincus</i>	Florida gar
Amiidae	<i>Amia calva</i>	bowfin
Clupeidae	<i>Dorosoma cepedianum</i>	gizzard shad
Cyprinidae	<i>Cyprinella leedsii</i>	bannerfin shiner
	<i>Cyprinella nivea</i>	whitefin shiner
	<i>Hybognathus regius</i>	eastern silvery minnow
	<i>Hybopsis rubrifrons</i>	rosyface chub
	<i>Nocomis leptoccephalus</i>	blueheaded chub
	<i>Notemigonus crysoleucas</i>	golden shiner
	<i>Notropis chalybaeus</i>	ironcolor shiner
	<i>Notropis cummingsae</i>	dusky shiner
	<i>Notropis hudsonius</i>	spottail shiner
	<i>Notropis lutipinnis</i>	yellowfin shiner
	<i>Notropis maculatus</i>	taillight shiner
	<i>Notropis petersoni</i>	coastal shiner
	<i>Opsopocodus emiliae</i>	pugnose shiner
	<i>Pteronotropsis stonei</i>	lowland shiner
	<i>Semotilus atromaculatus</i>	creek chub
Catostomidae	<i>Carpiodes cyprinus</i>	quillback
	<i>Carpiodes velifer</i>	highfin carpsucker
	<i>Erimyzon oblongus</i>	creek chubsucker
	<i>Erimyzon sucetta</i>	lake chubsucker
	<i>Hypentelium nigricans</i>	northern hogsucker
	<i>Minytrema melanops</i>	spotted sucker
	<i>Moxostoma collapsum</i>	notchlip redbhorse
	<i>Moxostoma robustum</i>	robust redbhorse
	<i>Scartomyzon</i> sp. cf. <i>lachneri</i>	brassy jumprock
Ictaluridae	<i>Ameiurus brunneus</i>	snail bullhead
	<i>Ameiurus catus</i>	white catfish
	<i>Ameiurus natalis</i>	yellow bullhead
	<i>Ameiurus nebulosus</i>	brown bullhead
	<i>Ameiurus platycephalus</i>	flat bullhead
	<i>Noturus gyrinus</i>	tadpole madtom
	<i>Noturus insignis</i>	marginated madtom
	<i>Noturus leptacanthus</i>	speckled madtom
Esocidae	<i>Esox americanus</i>	redfin pickerel
	<i>Esox niger</i>	chain pickerel
Umbridae	<i>Umbra pygmaea</i>	eastern mudminnow
Aphredoderidae	<i>Aphredoderus sayanus</i>	pirate perch
Amblyopsidae	<i>Chologaster cornuta</i>	swampfish
Fundulidae	<i>Fundulus chrysotus</i>	golden topminnow
	<i>Fundulus lineolatus</i>	lined topminnow
Poeciliidae	<i>Gambusia holbrooki</i>	eastern mosquitofish
Atherinopsidae	<i>Labidesthes sicculus</i>	brook silverside
Centrarchidae	<i>Acantharchus pomotis</i>	mud sunfish
	<i>Centrarchus macropterus</i>	flier
	<i>Enneacanthus chaetodon</i>	blackbanded sunfish

TABLE 3. (continued)

	Scientific name	Common name	
<b>Resident species</b>			
Centrarchidae	<i>Enneacanthus gloriosus</i>	bluespotted sunfish	
	<i>Enneacanthus obesus</i>	banded sunfish	
	<i>Lepomis auritus</i>	redbreast sunfish	
	<i>Lepomis gibbosus</i>	pumpkinseed	
	<i>Lepomis gulosus</i>	warmouth	
	<i>Lepomis macrochirus</i>	bluegill	
	<i>Lepomis marginatus</i>	dollar sunfish	
	<i>Lepomis microlophus</i>	redeer sunfish	
	<i>Lepomis punctatus</i>	spotted sunfish	
	<i>Micropterus salmoides</i>	largemouth bass	
	<i>Pomoxis nigromaculatus</i>	black crappie	
	Elassomatidae	<i>Elassoma evergladei</i>	Everglades pygmy sunfish
		<i>Elassoma okatie</i>	bluebarred pygmy sunfish
<i>Elassoma zonatum</i>		banded pigmy sunfish	
Percidae	<i>Etheostoma fricksium</i>	Savannah darter	
	<i>Etheostoma fusiforme</i>	swamp darter	
	<i>Etheostoma hopkinsi</i>	Christmas darter	
	<i>Etheostoma inscriptum</i>	turquoise darter	
	<i>Etheostoma olmstedi</i>	tessellated darter	
	<i>Etheostoma serrifer</i>	sawcheek darter	
	<i>Percina nigrofasciata</i>	blackbanded darter	
<b>Diadromous species</b>			
Acipenseridae	<i>Acipenser brevirostrum</i>	shortnose sturgeon	
	<i>Acipenser oxyrinchus</i>	Atlantic sturgeon	
Anguillidae	<i>Anguilla rostrata</i>	American eel	
Clupeidae	<i>Alosa aestivalis</i>	blueback herring	
	<i>Alosa mediocris</i>	hickory shad	
	<i>Alosa sapidissima</i>	American shad	
Moronidae	<i>Morone saxatilis</i>	striped bass	
<b>Marine species</b>			
Megalopidae	<i>Megalops atlanticus</i>	tarpon	
Belonidae	<i>Strongylura marina</i>	Atlantic needlefish	
Mugilidae	<i>Agonostomus monticola</i>	mountain mullet	
	<i>Mugil cephalus</i>	striped mullet	
Achiridae	<i>Trinectes maculatus</i>	hogchoker	
<b>Upland species</b>			
	<i>Micropterus coosae</i>	redestye bass <sup>1</sup>	

<sup>1</sup> The Savannah River is the only area of the redestye bass's range where it occurs below the Fall Line.

TABLE 4. Introduced fish species in the MSRB and their status.

	Scientific name	Common name
<b>Clearly established</b>		
Clupeidae	<i>Dorosoma petenense</i>	threadfin shad
Cyprinidae	<i>Cyprinus carpio</i>	common carp
Ictaluridae	<i>Ictalurus punctatus</i>	channel catfish
Percidae	<i>Perca flavescens</i>	yellow perch
<b>Rare and possibly not established</b>		
Cyprinidae	<i>Carassius auratus</i>	goldfish
Moronidae	<i>Morone americana</i>	white perch
	<i>Morone chrysops</i>	white bass
Centrarchidae	<i>Lepomis cyanellus</i>	green sunfish
	<i>Pomoxis annularis</i>	white crappie
<b>Clearly not established</b>		
Cyprinidae	<i>Ctenopharyngodon idella</i>	grass carp
Salmonidae	<i>Oncorhynchus mykiss</i>	rainbow trout
<b>Too little information</b>		
Ictaluridae	<i>Ictalurus furcatus</i>	blue catfish
	<i>Pylodictis olivaris</i>	flathead catfish

ciated with floodplains of lowland streams, includes marshes and sloughs.

The distribution patterns that we have noted are: (1) species living primarily in river mainstream including impoundments and side channels; (2) swamp, marsh, oxbow lake, or slough inhabitants; (3) primarily stream or creek inhabitants; and (4) generalists. There are no large permanent natural lakes in the MSRB, so it is not surprising that there are few species that are primarily lake and pond dwellers. The distribution pattern is noted in the account for each species.

### Summary

At this time it appears that the fish fauna of the middle Savannah River basin region is still in relatively good condition. The major concerns for the future are continued urbanization with increased runoff, channelization, siltation, and chemical and nutrient input. Also, if Harding et al. (1998) are correct, the full effects on the fauna of recent conditions may not yet be apparent. Unfortunately, the data set we have had to use in our analyses lacks the information necessary to assess sampling effort and relative species abundance. Anderson et al. (1995), using a data set with consistent sampling effort and

species relative abundance estimates, were able to show significant changes in species assemblages for freshwater fishes of Texas and the effects of dams and other local impactors.

The effects of introduced species in the MSRB are not well known at the present time either, but to date they seem to have been subtle, or at least minor. On a more positive note, seriously depleted species such as the American shad, the shortnose sturgeon, and the robust redhorse (Figure 3) are spawning in this subdrainage. Their reproductive success is still under evaluation.



FIGURE 3. The robust redhorse, *Moxostoma robustum*. This endangered species found in the MSRB appears to be making a comeback with help from the Robust Redhorse Recovery Plan.





## Savannah River and Swamps

The MSRB is in many ways typical of southeastern river basins. It is home to a diverse fish fauna, and its associated tributaries and wetlands are important spawning and nursery areas. And like other southeastern rivers, the Savannah River watershed is increasingly affected by the region's growing human population.

### Fish Habitats of the Middle Savannah River Basin and Associated Swamps

The Savannah River itself has several habitat types that are utilized by the fish populations of the MSRB. The most obvious of these habitats is the main river channel (Figure 4). The main river channel within the MSRB generally has a sandy substrate, but a variety of bottom substrate types may be found: cobbles and rock shelves at and near the Savannah River Rapids, sand or gravel where there is moderate flow, and mud and plant detritus in backwaters.

In addition to the main channel there are a number of "cutoff bends" and "dead rivers" (former river channels that are still connected to the main channel). Many cutoff bends and dead rivers were created when the Augusta Navigational Project modified the original river channel for barge traffic. Dead rivers and cutoff bends have characteristics intermediate between those of flowing lotic systems and still-water lentic systems, and they form oxbow lakes when both ends become disconnected from the main river channel. In this discussion, dead rivers are considered part of the lotic environment, and oxbows are treated as lentic environments. Historically there has

been little sampling in dead rivers of the MSRB. Side channels are segments of former river channels that are still connected to the main channel at each end but have reduced flow compared with the main channel. Side channel habitat, which is limited, has likewise been sampled little but is similar to that of cutoff bends.

The major swamp habitats in the MSRB are in two locations: Phinezy Swamp, adjacent to Augusta and the Savannah River, and the Savannah River Swamp, located mostly within the SRS adjacent to the Savannah River (Figures 5 and 6). The Savannah River Swamp receives water from Upper Three Runs (rkm 251), Fourmile Branch (rkm 241), Beaverdam Creek (rkm 243), Pen Branch (which does not directly drain into the Savannah River), Steel Creek (rkm 227), and Lower Three Runs (rkm 206). Across the river from the SRS there is swamp habitat, essentially a continuation of the Savannah River Swamp, associated with Sweetwater Creek (rkm 214). While there has been sporadic sampling of the fish fauna in the Savannah River Swamp, there are virtually no fisheries data for Phinezy Swamp or for the Sweetwater Creek area. There are some data from a swampy area on McBean Creek in Georgia, and some samples from the lower part of Brier Creek and Beaverdam Creek in Screven County, Georgia. These latter samples should probably be considered swamp samples, but the site description information was limited.

There are other swamp or swamplike habitats in the MSRB in addition to those identified above. Each of the streams and creeks has associated floodplains with bottomland hardwood forest. Major rain events normally

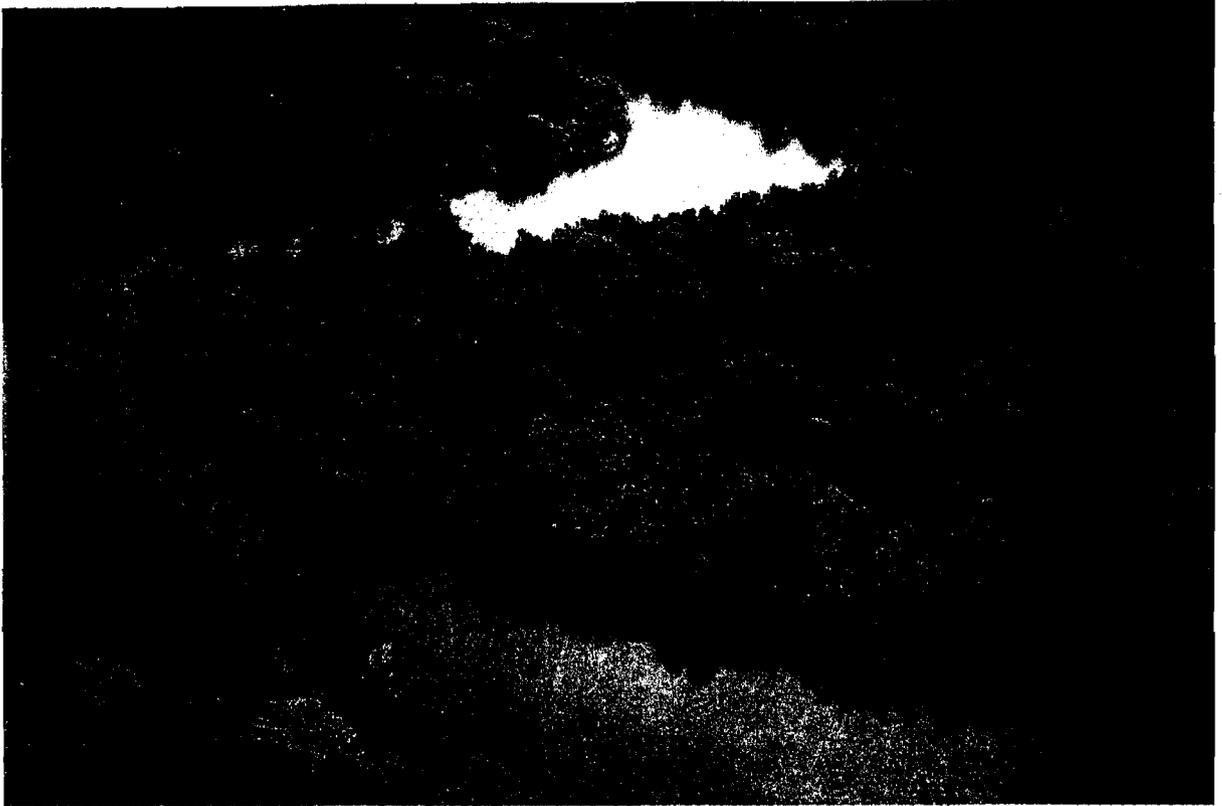


FIGURE 4. Savannah River main channel at about the middle of the Savannah River Site boundary.

cause flooding of these bottomland forests with a slow return of the stream to its main channel. Several fish species enter such flooded areas to feed or to spawn. Floodplain ponds and pools are common on these floodplains. These wetlands are connected with the mainstream during flooding events but are isolated during normal flows. Several fish species colonize these ponds during flood events and remain until either the next floodwater incursion or the area dries up. Very little information is available on the fishes of the floodplain ponds.

In the lower reaches of Steel Creek, Pen Branch, and Fourmile Branch on the SRS, heated reactor effluent eliminated the natural vegetation, and sediments from parts of the upper stream basin and upper floodplain were deposited onto the lower floodplain where the stream entered the Savannah River Swamp, forming deltas. After reactor shutdown in 1986, these bottomland forests were partially replaced with grassy marshes through natural regeneration. The marshes have been

sampled; the limited fish data for these specific marsh habitats are discussed more fully elsewhere.

The term "slough" has several meanings, but in the MSRB context it denotes linear wetlands that may represent sediment-filled oxbow lakes or other former river or stream channels. This habitat is quite limited, and the fish fauna data for it are proportionally smaller.

### Human Influences on the Fish Fauna of the Savannah River and Associated Swamps

There are many sources of indirect influences on local fish fauna. Those whose effects are best documented are discussed here.

**URBANIZATION** Three urbanized counties—Richmond and Columbia counties in Georgia and Aiken County in South Carolina—are the center of population for the MSRB. Increased urban population brings with it an in-



FIGURE 5. Savannah River main channel and the Savannah River Swamp near the mouth of Steel Creek.

crease in water-impervious surfaces such as roofs, roads, and paved driveways, and a decrease in natural vegetation. Water cannot infiltrate such surfaces and instead flows directly into streams. This runoff increases the frequency of flash floods and decreases the predictability of flooding. In doing so it interferes with the reproduction of the species that breed in the floodplains, which require predictability in the timing and intensity of flooding for successful reproduction.

**FISHERIES** The sport, subsistence, and commercial fisheries have a direct influence on fish populations and species assemblages. Sportfishing in the MSRB largely targets largemouth bass, black crappie, sunfishes, American shad, chain pickerel, larger catfishes such as the white catfish or channel catfish, and striped bass and its hybrids. Local newspaper fishing reports indicate that the area just below the New Savannah Bluff Lock and Dam is one of the most popular sportfishing areas within the MSRB.

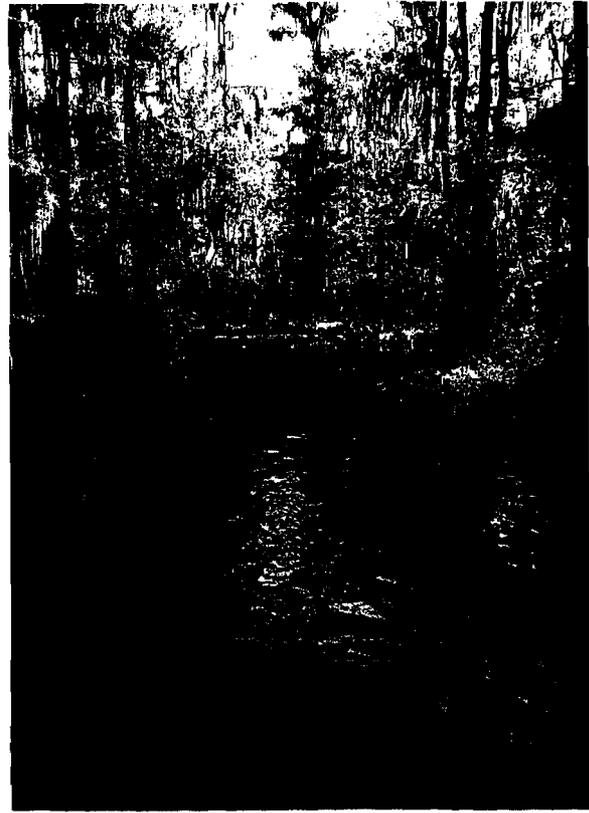


FIGURE 6. Savannah River Swamp.

Significant commercial fisheries are those on American shad, channel catfish, and white catfish. Commercial fisheries for blueback herring formerly existed in South Carolina (Ulrich et al. 1978), but no herring are taken in Georgia because of netting restrictions. Music (1981) reported that the Savannah River American shad catches represented 51% of Georgia landings in 1980, although only 13% of Georgia's commercial shad fishermen operated in the Savannah River. Striped bass are considered sport fish, and no commercial bass fishery is allowed in the Savannah River. Because they are highly regarded as a recreational species, considerable effort has been expended by government agencies to improve striped bass population levels. While Gilbert et al. (1986) suggested that striped bass spawn outside the MSRB, primarily in the tidal portions of the Savannah River, Paller et al. (1984, 1985, 1986b) have documented spawning well up into the river basin.

**INDUSTRIAL ACTIVITIES** Use of river water for industrial purposes, such as cooling water, has affected MSRB fish populations through entrainment (in which fish eggs and larvae are caught up in the current of a water intake device) and impingement (the removal of juvenile and adult fish from the intake stream by means of a small-mesh [0.95 cm] screen). Entrainment occurs wherever large volumes of water are removed, such as at domestic water treatment plants, or used in industrial processes. Mortality due to entrainment varies according to the species of fish, its life stage, and physical parameters of water flow such as current speed and turbulence. Changes in temperature or other water quality parameters and amelioration devices such as traveling screens that return the entrained animal to the water away from the intake device also play a role in survival. See Schubel and Marcy 1978 for biological assessment of entrainment impacts. Historically, the largest sources of entrainment in the MSRB have been the reactor cooling water intakes for the SRS (9.8% of Savannah River flow) and the Plant Vogtle nuclear power station (4.2% of river flow; Wiltz 1981; DOE 1990).

**SAVANNAH RIVER SITE** Historically, the SRS has affected populations of commercially and recreationally important fish species in the river primarily through impingement and entrainment losses of fish eggs, larvae, and adults during intake of cooling water (McFarlane et al. 1978). The overall rates of impingement at the SRS intakes were low relative to those of other cooling-water intake facilities in the Southeast (DOE 1988). Cessation of reactor operations and the concomitant lack of need for cooling water withdrawals from the Savannah River reduced entrainment impacts substantially.

**FLOOD/WATER CONTROL** Dams, levees, and locks all influence fish species assemblages. Dams and their associated locks convert lotic environments into lentic ones. Levees restrict overbank flooding, preventing the filling of riparian wetlands that are important to the life cycles of numerous riverine fish species and altering the frequency of floodplain inundation, which has profound effects on species assemblages utilizing floodplain ponds and sloughs. Overbank flooding also affects the biological community structure of rivers through introducing nutrients in the form of plant-derived materials into the main channel. The Clarks Hill/J. Strom Thurmond Dam,

the most downriver of the U.S. Army Corps of Engineers dams, probably has the strongest effect due to its regulation of flooding events. Additionally, the water released below the Clarks Hill/J. Strom Thurmond Dam is from below the thermocline and thus has a profound effect on temperature and dissolved oxygen levels for considerable distances downstream.

The New Savannah River Lock and Dam, the first dam on the Savannah River fish migrating upstream encounter, is a major obstruction for commercial and recreational species such as American shad, blueback herring, striped bass, and Atlantic sturgeon. It also affects the movements of such threatened and endangered species as the robust redhorse and shortnose sturgeon. In the early 1900s, some of these species migrated annually to the headwaters of the Savannah River—all the way to Tallulah Falls, 614 km from the Atlantic Ocean. Construction of reservoirs, dams, and hydropower facilities eliminated essential riverine habitat for these species. Access to historic spawning habitats has been reduced so that migrating fish can go only half as far upriver as formerly, and this is a major cause of the decline in the Savannah River's migratory fish populations (U.S. Fish and Wildlife Service 2001).

**CHANNELIZATION** Portions of the Savannah River, including 31 meander cutoffs, were channelized by the Corps of Engineers to enhance navigation between Augusta and Savannah, reducing the river length between these cities by 24.1 km (Wike et al. 1994). In addition to eliminating the meander cutoffs, the channelization increased the water velocity, likely decreased habitat heterogeneity in the straightened main channel, and increased backwater habitat in the form of dead rivers and man-made oxbows. These cutoffs are prominent in the lower portion of the MSRB. The work was completed by 1965, but some dredging continued through 1985 (Wike et al. 1994). Additionally, pile dikes increase the water velocity of the main channel by restricting flows. Eddies behind and around these dikes provide refuges from the high water velocities where fish frequently congregate. These areas are frequently favorite spots for anglers.

**SEDIMENTATION AND POLLUTION** The introduction of commercial agriculture in the eighteenth century increased the potential for erosion and thus increased sedimenta-

tion. The recent shift toward silviculture and pastureland is working to ameliorate this process. Countering this trend is the increased urbanization of the MSRB, which tends to increase sedimentation from construction activities and stormwater runoff. Sedimentation eliminates breeding habitat for fishes requiring clean substrates, extirpates invertebrates that may serve as food sources, and leads to wholesale changes in flora and fauna in affected areas (Berkman and Rabeni 1987; Waters 1995; Jones et al. 1999). In southern Appalachian streams, sedimentation resulting from deforestation shifts fish species assemblages away from species that spawn in rock crevices and clean gravel or cobbles to mound-building minnows, their nest associates, and fish that excavate nests in soft sediments (sunfishes and basses) (Sutherland et al. 2002).

Along with the aforementioned changes in runoff and erosion there is the problem of eutrophication. The Public Interest Research Group lists the Savannah River as the eighth most polluted river in the United States (National Science Center's Fort Discovery 2002). The expanding human population in the area has increased the amount of organic waste concentrated in a relatively small area. Even with sewage treatment, nutrients such as nitrogen compounds and phosphates are entering waterways at high enough levels to cause increased plant growth in some bodies of water. Additionally, even though less land area is under cultivation now than in the nineteenth century, agricultural fields are receiving higher levels of fertilizers and other chemicals. Water percolating through the soils of these fields picks up fertilizer, and the soil particles, often accompanied by absorbed inorganic fertilizer, enter waterways through erosion. This effect is most obvious in certain smaller bodies of water because of lack of dilution.

The deteriorating water quality (especially reduced levels of dissolved oxygen) appears to be degrading the southern river nurseries and summer habitats of the shortnose sturgeon and the Atlantic sturgeon; protection of these essential habitats is critical (Collins et al. 2000b). Influences of the deterioration on other species are not as well documented.

The factors that cause increased nutrient loading in the local waterways also introduce toxic substances. Currently, the Environmental Protection Agency (EPA) advises against eating fish from most streams and other water bodies in the MSRB due to mercury concentra-

tions. Although there are many possible sources of this mercury, about 99% of it appears to be entering the river through atmospheric deposition (EPA 2000). Other contaminants include pesticides from agricultural practices, radiocesium ( $^{137}\text{Cs}$ ) and tritium from previous SRS operations, toxic chemicals from lawns, fecal coliform bacteria from domestic animals, and other urban pollutants.

### Fish Habitat in Savannah River and Associated Wetlands

Natural flooding regimes are important in organizing "natural" fish communities. For instance, in Missouri, both the stream fish assemblages and the assemblages occurring in the bottomland hardwood wetlands were very different in areas with natural flood regimes and those with flood regimes regulated by dam release (Finger and Stewart 1987). Several of the species that were abundant in the naturally flooded areas were absent from the regulated areas. Unfortunately, we can say little about this with regard to the MSRB as we found no reliable data for the Savannah River collected before completion of the Clarks Hill/J. Strom Thurmond Dam around 1955; probably none exist predating the Stevens Creek Dam (rkm 333) completed in 1914.

Floodplain ponds are important habitats for MSRB fish species such as the pickerels and pirate perch. While these are not, strictly speaking, lotic environments, they are integral parts of swamp and marsh habitats, and when inundated they are part of the river itself. Adult fishes utilize the available habitats to varying degrees. A number of species are either largely confined to the main river channel habitat or use river channels most of the time but use swamp habitat or lower reaches of tributaries as available (Figures 7 and 8; Table 5).

While some of the numbers in Table 5 may be biased by the number of available collections for particular habitats (e.g., *Lepomis marginatus* and *Notropis chalybaeus* are not typical of large river habitat), some species clearly are most prevalent in the river. A smaller number of species are primarily swamp or marsh dwellers that may use the river channel or stream channels periodically. One complicating factor is that neither time of day of capture nor life stage is known for most of the specimens contained in our derived historical database. Ross and Baker (1983) showed that during spring inundations of floodplains in

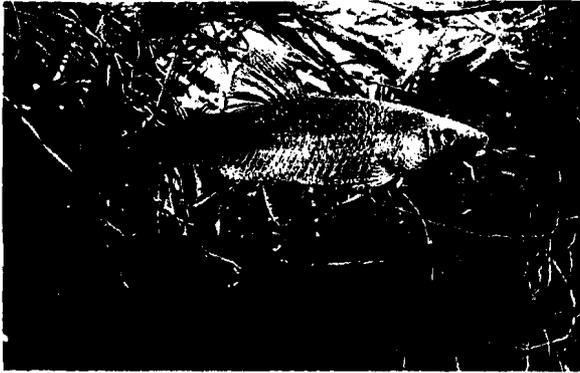


FIGURE 7. The whitefin shiner, *Cyprinella nivea*, is largely confined to the Savannah River and the lower reaches of tributary streams.



FIGURE 8. The snail bullhead, *Ameiurus brunneus*, is common in the Savannah River.

Mississippi, a number of “flood-exploitative” species were taken frequently on the floodplain in daylight hours but were more common near the channel at night, while “flood-quiescent” species were largely restricted to the channel and were almost never taken on the floodplain.

### River and Swamp Spawning Habitat

In general, there are specific guilds of fish that preferentially spawn in channels rather than in backwater habitats such as oxbows, sloughs, “dead rivers,” and floodplain pools (Copp 1989). Light trap data from the Tallahatchie River of Mississippi indicated that larval *Lepomis* spp., *Pomoxis* spp., and *Dorosoma* spp., and juvenile *Gambusia affinis* were much more abundant in sloughs and low-current floodplain tributaries, while minnow larvae were more abundant in the higher-current (channel) areas (Turner et al. 1994). The bowfin, *Amia calva*, is one of the most common species caught by subsistence fishermen. In the SRS, larval fish appear to use submerged macrophytes for cover in floodplain braided streams of the Steel Creek Swamp more during daylight hours than during nighttime (Paller 1987).

Seasonal movement into and out of floodplain pools has been documented for a number of species. Flooding of backwater habitats during spawning periods increases year class production of fish that spawn in these habitats, especially largemouth bass (Lambou 1959). In the Kankakee River of Illinois, the following species found in the MSRB moved into and out of backwater habitats during

the spring and early summer (the period of most spawning): redbfin pickerel, common carp, golden shiner, pugnose minnow, yellow bullhead, tadpole madtom, pirate perch, largemouth bass, green sunfish, bluegill, white crappie, and black crappie (Kwak 1988). Similar seasonal movements have been noted for largemouth bass in the Savannah River (Jones 2001). In the early winter, when water temperatures in the Savannah River Swamp drop below temperatures in the main river channel, largemouth bass and apparently many other species leave portions of the swamp and the entire Steel Creek Inlet and move out into the river. The fish return to the inlet in the spring when this temperature differential disappears; however, extreme drought conditions may reduce water quality in the swamp and inlet, preventing their use.

There are a number of species that either spawn on the inundated floodplain or whose larvae are more frequently captured there when these habitats are sampled. In the bottomlands along the Cache River of Arkansas, the larvae of the following MSRB species were found more frequently in the flooded bottomland forest than in the main channel: gizzard shad, pugnose minnow, tadpole madtom, pirate perch, flier, and black crappie. In addition, spotted sucker and channel catfish larvae were found about as frequently in the flooded bottomland forest as in the main channel (Killgore and Baker 1996).

Seasonal inundations, in addition to furnishing access to feeding areas and spawning sites, also provide highways for fish (Whitehurst 1981), and even species that spend long periods sedentary in swamps may move long

TABLE 5. Fish represented in collections from river and swamp habitats significantly more than would be represented by chance (more than 30% of records from river habitat or more than 15% of records from swamp habitat; species are listed in phylogenetic order).

Scientific name	Common name	Number <sup>1</sup>	River <sup>2</sup>	Swamp <sup>2</sup>	Lake <sup>2</sup>	Stream <sup>2</sup>
<i>Acipenser brevirostrum</i>	shortnose sturgeon	7	100			
<i>Acipenser oxyrinchus</i>	Atlantic sturgeon	7	100			
<i>Lepisosteus osseus</i>	longnose gar	96	68	21		11
<i>Lepisosteus platyrhincus</i>	Florida gar	17	24	76		
<i>Amia calva</i>	bowfin	77	45	27	5	22
<i>Anguilla rostrata</i>	American eel	142	42	10	2	45
<i>Alosa aestivalis</i>	blueback herring	37	92		8	
<i>Alosa mediocris</i>	hickory shad	7	57	43		
<i>Alosa sapidissima</i>	American shad	38	92	8		
<i>Dorosoma cepedianum</i>	gizzard shad	90	74	14	7	4
<i>Dorosoma petenense</i>	threadfin shad	19	68		32	
<i>Cyprinella leedsi</i>	bannerfin shiner	60	88	2	5	5
<i>Cyprinella nivea</i>	whitefin shiner	88	88		2	10
<i>Cyprinus carpio</i>	common carp	10	70	20	10	
<i>Hybognathus regius</i>	eastern silvery minnow	124	94	1	3	2
<i>Hybopsis rubrifrons</i>	rosyface chub	39	87			13
<i>Notemigonus crysoleucas</i>	golden shiner	197	46	10	19	25
<i>Notropis chalybaeus</i>	ironcolor shiner	135	50	13	5	31
<i>Notropis hudsonius</i>	spottail shiner	165	91	1	2	6
<i>Notropis maculatus</i>	taillight shiner	151	77	6	6	11
<i>Notropis petersoni</i>	coastal shiner	210	53	9	3	35
<i>Opsopoeodus emiliae</i>	pugnose minnow	78	82	12	1	5
<i>Carpiodes cyprinus</i>	quillback	11	100			
<i>Carpiodes velifer</i>	highfin carpsucker	3	100			
<i>Frimyzon oblongus</i>	creek chubsucker	111	36	9	3	52
<i>Minytrema melanops</i>	spotted sucker	178	57	11	2	30
<i>Moxostoma collapsum</i>	notchlip redhorse	39	167	9		24
<i>Moxostoma robustum</i>	robust redhorse	2	100			
<i>Scartomyzon</i> sp. cf. <i>lachneri</i>	brassy jumprock	2	100			
<i>Ameiurus brunneus</i>	snail bullhead	49	65			35
<i>Ameiurus catus</i>	white catfish	24	67	4	8	21
<i>Ameiurus natalis</i>	yellow bullhead	122	33	13	12	42
<i>Ameiurus nebulosus</i>	brown bullhead	78	54	6	8	32
<i>Ameiurus platycephalus</i>	flat bullhead	120	48	7	18	28
<i>Ictalurus punctatus</i>	channel catfish	40	58	15	2	25
<i>Noturus gyrinus</i>	tadpole madtom	106	40	8	8	44
<i>Pylodictis olivaris</i>	flathead catfish	1	100			
<i>Esox americanus</i>	redfin pickerel	231	38	7	10	44
<i>Esox niger</i>	chain pickerel	209	42	10	12	35
<i>Umbra pygmaea</i>	eastern mudminnow	38	26	21	18	34
<i>Aphredoderus sayanus</i>	pirate perch	227	38	10	4	48
<i>Chologaster cornuta</i>	swampfish	31	22	35		42
<i>Strongylura marina</i>	Atlantic needlefish	9	100			
<i>Fundulus chrysotus</i>	golden topminnow	18	89	11		
<i>Fundulus lineolatus</i>	lined topminnow	108	56	6	10	29
<i>Gambusia holbrooki</i>	eastern mosquitofish	236	45	8	8	38
<i>Labidesthes sicculus</i>	brook silverside	205	58	10	10	21

TABLE 5. (continued)

Scientific name	Common name	Number <sup>1</sup>	River <sup>2</sup>	Swamp <sup>2</sup>	Lake <sup>2</sup>	Stream <sup>2</sup>
<i>Morone americana</i>	white perch	2	50		50	
<i>Morone chrysops</i>	white bass	3	100			
<i>Morone saxatilis</i>	striped bass	5	100			
<i>Elassoma evergladei</i>	Everglades pygmy sunfish	1	100			
<i>Elassoma okatie</i>	bluebarred pygmy sunfish	5	60		40	
<i>Elassoma zonatum</i>	banded pygmy sunfish	100	62	16	1	21
<i>Centrarchus macropterus</i>	flier	85	58	10	8	24
<i>Enneacanthus gloriosus</i>	bluespotted sunfish	98	67	12	5	15
<i>Lepomis auritus</i>	redbreast sunfish	293	44	5	13	37
<i>Lepomis cyanellus</i>	green sunfish	9	78		11	11
<i>Lepomis gibbosus</i>	pumpkinseed	79	86		4	10
<i>Lepomis gulosus</i>	warmouth	203	48	7	18	27
<i>Lepomis macrochirus</i>	bluegill	271	47	7	15	31
<i>Lepomis marginatus</i>	dollar sunfish	185	42	7	22	30
<i>Lepomis microlophus</i>	redeer sunfish	113	64	14	4	18
<i>Lepomis punctatus</i>	spotted sunfish	250	38	10	11	42
<i>Micropterus coosae</i>	redeye bass	4	100			
<i>Micropterus salmoides</i>	largemouth bass	250	42	11	15	32
<i>Pomoxis annularis</i>	white crappie	39	79	5	8	8
<i>Pomoxis nigromaculatus</i>	black crappie	135	70	4	16	9
<i>Etheostoma fusiforme</i>	swamp darter	139	66	6	10	17
<i>Etheostoma olmstedii</i>	tesselated darter	205	51	2	2	44
<i>Percia flavescens</i>	yellow perch	116	66	7	15	12
<i>Agonostomus monticola</i>	mountain mullet	2	100			
<i>Mugil cephalus</i>	striped mullet	21	52	43		5
<i>Trinectes maculatus</i>	hogchoker	44	100			

<sup>1</sup>The number of collections in our historical data set in which a given species occurred.

<sup>2</sup>The number is the percentage of records from the given habitat type, rounded to the nearest whole number.

distances (measured in kilometers) during spring floods. For example, tagged white catfish moved 23 km downstream and 61 km upstream during spring and early summer in the Connecticut River (Marcy 1976).

Because sloughs, oxbow lakes, and floodplain ponds are populated with subsets of the adjacent river's fauna, these habitats may serve an important function as ref-

uges in the event of catastrophic stream mortality (Halyk and Balon 1983). On the other hand, floodplain sloughs and ponds may serve as population sinks during droughts, drying up much as large areas of the Everglades do each year, with concomitant heavy mortality of fishes (Carlson and Duever 1977).



highly dependent on river discharge, with optimum discharge correlating directly to river drainage area (Bilkovic 2000). The relationship of drainage area to discharge may be modified in the MSRB by upstream dams. Apparently this species is unable to complete all life stages in fresh water, as all introductions into landlocked situations have failed, though some adult fish survived for several years after introduction (Hildebrand 1963). A recent 40-year summary of early life history and adult population dynamics studies can be found in Leggett et al. 2004 and Savoy et al. 2004, respectively.

**CONSERVATION STATUS** Fisheries stocks have shown a coastwide decline with some recovery of stock size in the Savannah River (Atlantic States Marine Fisheries Commission 1999).

**BIOLOGY** Spawning runs may begin in November in Florida and may occur as late as July farther north (Leggett and Whitney 1972; Stier and Crance 1985). Males dominate the earliest runs of the season (Smith 1907). Populations in the Carolinas spawn in March to early May at water temperatures ranging from 10.5 to 21.6 °C (Jones et al. 1978). Southern populations (i.e., south of Cape Hatteras, North Carolina) tend to spawn once and die; northern populations usually are repeat spawners (Leggett and Carscadden 1978). Adults eat little during the 2 months they spend in fresh water on the spawning run, and weight loss and mortality are significant (Leggett 1972; Chittenden 1976; S. M. Davis 1980). Individuals that significantly delay the downstream postspawning migration may lose enough weight to cause mortality (Nichols 1959). Meristic data indicate that northern populations return to their natal streams for spawning (Carscadden and Leggett 1975; Melvin et al. 1986; Bentzen et al. 1989). Tagging experiments support such homing (Hollis 1948), and olfaction and vision appear to aid in homing to natal rivers (Dodson and Leggett 1974). Spawning

is usually at night and may occur anywhere in a river, but the most frequented sites have flats or shallow water (Marcy 1972; Stier and Crance 1985). Eggs hatch in 71–86 hours, are demersal or pelagic, and are scattered randomly in the spawning act. Eggs travel 1.6–6.4 km from the point where they were broadcast (Marcy 1972). Larvae have similar survival and growth rates in salinities ranging from 0 to 20 ppt (Limburg and Ross 1995). Lippson and Moran (1974) summarized descriptions of American shad larvae and their distinguishing features.

Larvae and juveniles remain in their tidal freshwater nursery until water temperatures drop in the late fall, when they migrate out to sea or at least migrate downstream to overwinter near the mouth of the river or bay (Milstein 1981). In northern populations, the juveniles may remain in brackish water or inshore for the first year (Hildebrand 1963). In Virginia, stocked juvenile American shad migrated 28 km upstream from the site of release, and the smallest juveniles, both native and stocked, were found farthest upstream (Dixon et al. 1998). This migration cannot be accounted for by swimming alone; they must have made use of selective tidal transport. Juveniles remain in the ocean until they are at least 2 years of age. While at sea they form large schools. Most males mature at 2–3 years; females mature at 3–4 years of age.

Marine adults eat zooplankton, plant material, molluscs, and small fishes. The mysid zooplankters available in freshwater streams are much smaller than marine mysids and are therefore unavailable to adult American shad (Atkinson 1951), which thus feed little in fresh water while on the spawning run. Larvae and juveniles eat crustaceans, insect larvae, and, sometimes, smaller fish (Hildebrand 1963).

**SCIENTIFIC NAME** *Alosa*, from Saxon *allis* = old name for the European shad, *Alosa alosa*; *sapidissima* = “most delicious” (Latin).



***Morone saxatilis* (Walbaum, 1792)****Striped bass**

**DESCRIPTION** Body elongate, compressed. Head with acute snout; mouth large, with lower jaw projecting ahead of upper jaw. Maximum body depth three or more times into standard length. Margin of operculum with two sharp spines; margin of preopercle serrate. Lateral line complete and almost straight. Two elongate tooth patches on back of tongue. First and second dorsal fins completely separate. Caudal fin forked.

Back dark gray to green. Sides green to silver, shading to white or cream on the belly. Seven or eight continuous black stripes on side: three or four stripes above the lateral line, one containing the lateral line, and three below. Juveniles smaller than 12.7 cm may have vertical bars on the sides.

**SIZE** Males to 116 cm FL, females possibly to 183 cm. Landlocked striped bass reach 27.5 kg; marine fish may exceed 45 kg. Maximum size in SRS is about 10 kg (Bennett and McFarlane 1983).

**MERISTICS** First dorsal spines 8–9, second dorsal spine 1, dorsal rays (9)12(14), anal spines 3, anal rays (7)9–12(13); lateral line scales 50–72, Gulf Coast populations 63–72,

Atlantic Coast populations 50–67 (Hardy 1978); gill rakers on lower arch 12–15, on upper arch 6–12.


**DISTRIBUTION** On the Atlantic Coast, from the St. Lawrence River of Canada and Nova Scotia to the St. Johns River of Florida; in the Gulf of Mexico, from western Florida through the Mobile Bay drainage of Alabama west to Lake Ponchartrain, Louisiana (Burgess *in* Lee et al. 1980). Striped bass (uncertain whether native or introduced) have been taken in marine water in Texas (Hoese and Moore 1977), and may be native in east Texas (Pam Fuller pers. comm.). They were introduced in California and now occur from Ensenada, Mexico, to the Columbia River of Washington (Bain and Bain 1982). Also introduced into the former Soviet Union and South Africa. In the MSRB, most frequently found in the Savannah River, but relatively large numbers ascend larger tributaries such as Upper Three Runs in the summer to avoid warmer river water.

**HABITAT** Free-flowing rivers, reservoirs, and coastal marine waters with at least some current, over bottoms with gravel, rocks, and vegetation. In marine waters, they are seldom more than 6–8 km from shore (Bigelow and Schroeder 1953). Spawning habitat appears to be fresh water well above the salt wedge in the estuary. Enough current to keep the semipelagic eggs in the water column



*Morone saxatilis*, striped bass; adult



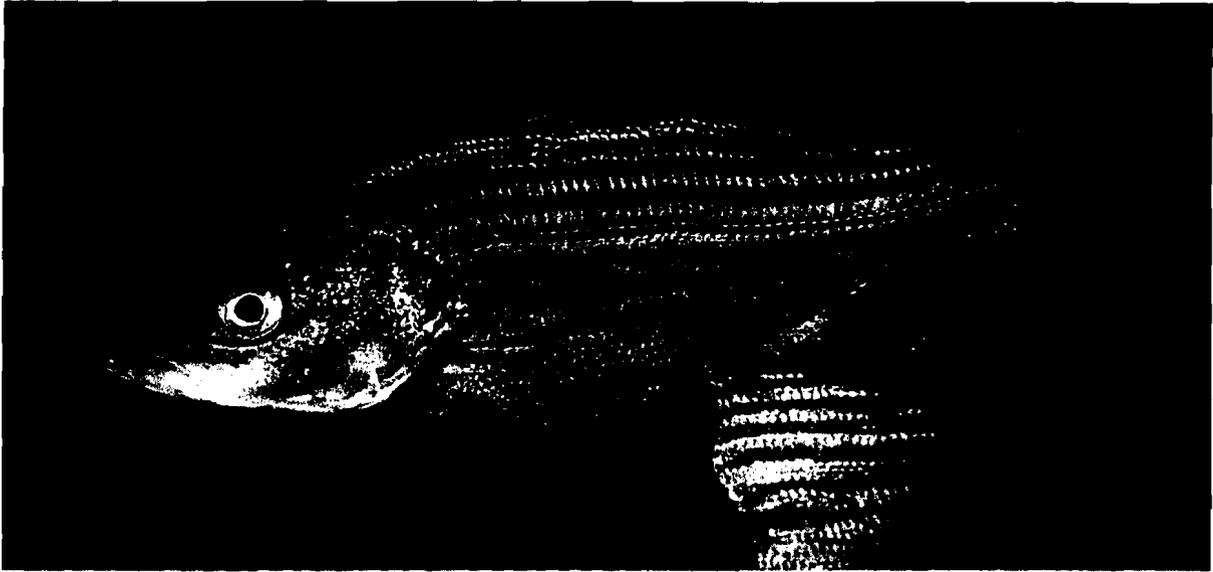

*Morone saxatilis*, striped bass; juvenile

is required as well as enough distance above the salt wedge or still water to allow the eggs to hatch before sinking to the bottom. Striped bass seem to avoid temperatures above 21 °C, and larger adults are generally found in deeper water.

**BIOLOGY** There is an enormous body of literature on the biology of this species, not least because of its economic importance as a sport fish (e.g., see *Transactions of the American Fisheries Society*, especially volumes 110[1], 1981, and 114, 1985; and *Fisheries Management and Ecology*, volume 10[5], 2003). Although the striped bass is generally considered anadromous, some reproducing landlocked and largely riverine populations exist. Striped bass migrate upriver and into tributaries for spring spawning in March, April, and May; larger fish migrate longer distances than smaller fish. Spawning occurs in strong currents of large rivers when the water temperature is above 14.4 °C. Hardy 1978 provides a detailed summary of larval development. Adults usually return to estuaries or coastal marine waters after spawning, but in some populations they may move farther upriver (Dudley et al. 1977); this tendency is more pronounced in the southern part of the range (Crance 1984). The young of nonlandlocked populations spend the first year in coastal estuaries. Where not prevented by dams, they overwinter in estuaries and in coastal marine waters. Populations from

New England northward and from Cape Hatteras southward do not move great distances from the mouth of the natal stream; those in the Mid-Atlantic Bight migrate long distances and mingle breeding stocks (Hardy 1978). There is evidence of stream fidelity (Mulligan et al. 1987). Young-of-the-year grow significantly larger in low-salinity estuarine environments than in fresh water (Secor et al. 2000). Males reach sexual maturity at age 2 or 3, females at age 4 or 5. Males may be sexually mature at 18 cm; females can be mature at 36 cm.

Striped bass occur in large, continuously moving schools and feed on schooling fishes such as shads (Stevens 1958; Etnier and Starnes 1993). The larvae feed primarily on crustacean nauplii, switching to larger zooplankton and macroinvertebrates as they grow (Humphries and Cumming 1973). High concentrations of small zooplankton appear necessary for the survival of larvae during the first few days after hatching (Setzler et al. 1980; Cooper and Polgar 1981; Eldridge et al. 1981; Martin et al. 1985; Martin and Wright 1987; and Setzler-Hamilton et al. 1987). There is high mortality during the first winter, and the nutritional condition of the fish determines success in overwintering (Hurst et al. 2000).

**SCIENTIFIC NAME** *Morone*, meaning unknown; *saxatilis* = "rock dwelling" (Latin).



## Literature Cited

- Abbott, C. C. 1861. Notes on the habits of *Aphredoderus sayanus*. Proc. Acad. Nat. Sci. Phila. 1861:95-96. Cited in D. A. Etnier and W. C. Starnes. 1993. The fishes of Tennessee. University of Tennessee Press, Knoxville.
- Abbott, C. C. 1868. List of vertebrate animals of New Jersey. Pages 807-808 in G. C. Cook, editor. The geology of New Jersey. Board of Managers, Newark, N.J.
- Abbott, C. C. 1870. Notes on fresh-water fishes of New Jersey. Am. Nat. 4:107.
- Abbott, C. C. 1884. A naturalist rambles about home. D. Appleton, New York.
- Able, K. W., and M. P. Fahay. 1998. The first year in the life of estuarine fishes in the Middle Atlantic Bight. Rutgers University Press, New Brunswick, N.J.
- Adams, C. C., and T. L. Hankinson. 1932. Ecology and economics of Oneida Lake fish. Roosevelt Wildl. Ann., Syracuse University, Syracuse, N.Y.
- Aho, J. M., C. S. Anderson, K. B. Floyd, and M. T. Negus. 1986a. Patterns in fish species assemblage structure and dynamics in waters of the Savannah River Plant. Savannah River Ecology Laboratory Report SREL-27 UC-66e, Savannah River Ecology Laboratory, Aiken, S.C.
- Aho, J. M., C. S. Anderson, and J. W. Terrell. 1986b. Habitat suitability index models and instream flow suitability curves: redbreast sunfish. U.S. Fish Wildl. Serv. Biol. Rep. 82(10.119).
- Aiken, K. 1998. Reproduction, diet and population structure of the mountain mullet, *Agonostomus monticola*, in Jamaica, West Indies. Environ. Biol. Fishes 53:347-352.
- Albanese, B. 2000a. Reproduction behavior and spawning microhabitat of the flagfin shiner *Pteronotropis signipinnis*. Am. Midl. Nat. 143:84-93.
- Albanese, B. 2000b. Life-history of the flagfin shiner, *Pteronotropis signipinnis*, from a blackwater stream in southeastern Mississippi. Ecol. Freshw. Fish 9:219-228.
- Alberts, J. J., J. W. Bowling, J. E. Schindler, and D. E. Kyle. 1988. Seasonal dynamics of physical and chemical properties of a warm monomictic reservoir. Int. Verein. theoret. ange. Limnol. Verhand. 23:176-180.
- Allen, D. E., and C. S. Thomason. 1993. Survey and inventory of fisheries resources in the Combahee River. Study completion report F-32. South Carolina Wildlife and Marine Resources Department, Columbia.
- Anderson, A. A., C. Hubbs, K. O. Winemiller, and R. J. Edwards. 1995. Texas freshwater fish assemblages following three decades of environmental change. Southwest. Nat. 40:314-321.
- Anderson, W. D. Jr. 1964. Fishes of some South Carolina Coastal Plain streams. Q. J. Fla. Acad. Sci. 27:31-54.
- Andrews, A. H., E. J. Burton, K. H. Coale, G. M. Cailliet, and R. E. Crabtree. 2001. Radiometric age validation of Atlantic tarpon, *Megalops atlanticus*. Fish. Bull. 99:389-398.
- Angermeier, P. L. 1985. Spatio-temporal patterns of foraging success for fishes in an Illinois stream. Am. Midl. Nat. 114:342-359.
- Angus, R. A., and W. M. Howell. 1996. Geographic distributions of eastern and western mosquitofishes (Poeciliidae: *Gambusia*): delineations of ranges using fin ray counts. Southeast. Fishes Council. Proc. 33:1-6.
- Annett, C. A. 1998. Hunting behavior of Florida largemouth bass, *Micropterus salmoides floridanus*, in a channelized river. Environ. Biol. Fishes 53:75-87.
- Applegate, R. L., J. W. Mullan, and D. I. Morris. 1966. Food and growth of six centrarchids from shoreline areas of Bull Shoals Reservoir. Proc. Annu. Conf. Southeast. Assoc. Game Fish Comm. 19:469-482.
- Askerov, T. A. 1975. Survival rate and oxygen consumption of juvenile wild carp maintained under different conditions. J. Hydrobiol. (Gidrobiol. Zh.) 11:67-68.
- Astanin, L. P., and L. M. Trofimova. 1969. Comparative study of the food, growth, and fecundity of common carp and domesticated carp (*Cyprinus carpio* L.) in Yegorlyk Reservoir. J. Ichthyol. 9:354-363.
- Atkinson, C. E. 1951. Feeding habits of adult shad (*Alosa sapidissima*) in fresh water. Ecology 32:556-557.
- Atlantic States Marine Fisheries Commission. 1999. Amendment 1 to the Interstate Fishery Management Plan for Shad and River Herring. Fish Manage. Rep. 35:77.

- Auer, N. A., editor. 1982. Identification of larval fishes of the Great Lakes basin with emphasis on the Lake Michigan drainage. Great Lakes Fish. Comm. Spec. Pub. 82-3, Ann Arbor, Mich.
- Avila, V. L. 1976. A field study of nesting behavior of male bluegill sunfish (*Lepomis macrochirus Rafinesque*). Am. Midl. Nat. 6(1):195-206.
- Avise, J. C., and M. J. Van Den Avyle. 1984. Genetic analysis of reproduction of hybrid white bass  $\times$  striped bass in the Savannah River. Trans. Amer. Fish. Soc. 113:563-570.
- Bachmann, R. W., B. L. Jones, D. D. Fox, M. Hoyer, L. A. Bull, and D. E. Canfield Jr. 1996. Relations between trophic state indicators and fish in Florida (U.S.A.) lakes. Can. J. Fish. Aquat. Sci. 53:842-855.
- Bade, E. 1931. [No title.] Pages 261-820 in *Das Süßwasser-Aquarium. Die Flora und Fauna des Süßwassers und ihre Pflege im Zimmer-Aquarium* [in German]. Teil 2: Die Süßwasser-Fauna, 5th edition. Fritz Pfennigstorff, Berlin.
- Bailey, R. M., H. E. Winn, and C. L. Smith. 1954. Fishes from the Escambia River, Alabama and Florida, with ecologic and taxonomic notes. Proc. Acad. Nat. Sci. Phila. 106:109-164.
- Bain, M. B. 1997. Atlantic and shortnose sturgeons of the Hudson River; common and divergent life history attributes. Environ. Biol. Fishes 48:347-358.
- Bain, M. B., and J. L. Bain. 1982. Habitat suitability index models: coastal stocks of striped bass. FWS/OBS-82/10.1:29. U.S. Fish and Wildlife Service, Washington, D.C.
- Bain, M. B., and L. A. Helfrich. 1983. Role of male parental care in survival of larval bluegills. Trans. Am. Fish. Soc. 112:47-52.
- Baker, S. 2002. Food habits and food electivity of the turquoise darter, *Etheostoma inscriptum*, in a Georgia Piedmont stream. J. Freshw. Ecol. 17:385-390.
- Ballantyne, P. K., and P. W. Colgan. 1978a. Sound production during agonistic and reproductive behaviour in the pumpkinseed (*Lepomis gibbosus*), the bluegill (*L. macrochirus*), and their hybrid sunfish: I. Context. Biol. Behav. 3:113-135.
- Ballantyne, P. K., and P. W. Colgan. 1978b. Sound production during agonistic and reproductive behavior in the pumpkinseed (*Lepomis gibbosus*), the bluegill (*L. macrochirus*), and their hybrid sunfish: II. Recipients. Biol. Behav. 3:207-220.
- Ballek, M. S. 1994. Reproduction and early life history of the redfin pickerel (*Esox americanus americanus*). Master's thesis, University of South Carolina, Columbia.
- Barney, R. L., and B. J. Anson. 1920. Life history and ecology of pygmy sunfish, *Elassoma zonatum*. Ecology 1:241-256.
- Barr, B. R., and J. J. Ney. 1993. Predation by flathead catfish (*Pylodictus olivaris*) on black bass and sunfish populations in a New River impoundment. Va. J. Sci. 44:145.
- Barret, T. 2000. History of the robust redhorse in the Savannah River. Presented at the 2000 Southern Division of the American Fisheries Society Midyear Meeting, Savannah, Ga.
- Barwick, D. H. 1981. Fecundity of the black crappie in a reservoir receiving heated effluent. Progr. Fish-Cult. 43(3):153-154.
- Bass, D. G., and V. G. Hitt. 1974. Ecological aspects of the redbreast sunfish, *Lepomis auritus*, in Florida. Proc. Annu. Conf. Southeast. Assoc. Game Fish Comm. 28:296-396.
- Battle, H. I. 1940. The embryology and larval development of the goldfish (*Carassius auratus* L.) from Lake Erie. Ohio J. Sci. 40:82-93.
- Baumann, P. C., and J. F. Kitchell. 1974. Diel patterns of distribution and feeding of bluegill (*Lepomis macrochirus*) in Lake Wingra, Wisconsin. Trans. Am. Fish. Soc. 2:255-260.
- Beach, M. L. 1974. Food habits and reproduction of the taillight shiner, *Notropis maculatus* (Hay), in central Florida. Fla. Sci. 37:5-16.
- Becker, G. C. 1983. Fishes of Wisconsin. University of Wisconsin Press, Madison.
- Becker, H. R. 1923. The habitat of *Aphredoderus sayanus* in Kalamazoo County, Michigan. Occas. Pap. Mus. Zool. Univ. Mich. 138.
- Beckman, W. C. 1952. Guide to the fishes of Colorado. Univ. Colo. Mus. Leaflet. 11:110.
- Beecher, H. A. 1979. Anomalous occurrence of lip projection on *Carpiodes cyprinus*. Fla. Sci. 42:62-63.
- Beecher, H. A. 1980. Habitat segregation of Florida carp-suckers (Osteichthyes: Catostomidae: *Carpiodes*). Fla. Sci. 43:92-97.
- Beecher, H. A., and W. C. Hixson. 1982. Seasonal abundance of fishes in three northwest Florida rivers. Fla. Sci. 45:145-171.
- Beecher, H. A., W. C. Hixson, and T. S. Hopkins. 1977. Fishes of a Florida oxbow lake and its parent river. Fla. Sci. 40:140-148.
- Behnke, R. J. 1992. Native trout of western North America. Am. Fish. Soc. Monogr. 6:275.
- Belk, M. C. 1993. Growth and mortality of juvenile sunfishes (*Lepomis* sp.) under heavy predation. Ecol. Freshw. Fish 2:91-98.
- Belk, M. C. 1995. Variation in growth and age at maturity in bluegill sunfish: genetic or environmental effects? J. Fish Biol. 47:237-247.
- Belk, M. C. 1998. Predator-induced delayed maturity in

- bluegill sunfish (*Lepomis macrochirus*): variation among populations. *Oecologia* 113:203-209.
- Belk, M. C., and L. S. Hales Jr. 1993. Predation-induced differences in growth and reproduction of bluegills (*Lepomis macrochirus*). *Copeia* 1993(4):1034-1044.
- Belk, M. C., and D. D. Houston. 2002. Bergmann's rule in ectotherms: a test using freshwater fishes. *Am. Nat.* 160:803-808.
- Benke, A. C., K. A. Parsons, and S. M. Dhar. 1991. Population and community patterns of invertebrate drift in an unregulated Coastal Plain river. *Can. J. Fish. Aquat. Sci.* 48:811-823.
- Benke, A. C., and J. B. Wallace. 1990. Wood dynamics in Coastal Plain blackwater streams. *Can. J. Fish. Aquat. Sci.* 47:92-99.
- Bennett, D. H., and J. W. Gibbons. 1972. Food of largemouth bass (*Micropterus salmoides*) in a South Carolina reservoir receiving heated effluent. *Trans. Am. Fish. Soc.* 101(4):650-654.
- Bennett, D. H., and J. W. Gibbons. 1975. Reproductive cycles of largemouth bass (*Micropterus salmoides*) in a cooling reservoir. *Trans. Am. Fish. Soc.* 104(1):77-82.
- Bennett, D. H., and R. W. McFarlane. 1983. The fishes of the Savannah River Plant: National Environmental Research Park. University of Georgia, Savannah River Ecology Laboratory, Aiken, S.C.
- Bennett, G. W. 1937. The growth of the largemouthed black bass, *Huro salmoides*, in the waters of Wisconsin. *Copeia* 1937:104-118.
- Bentzen, P., G. C. Brown, and W. C. Leggett. 1989. Mitochondrial DNA polymorphism, population structure, and life history variation in American shad (*Alosa sapidissima*). *Can. J. Fish. Aquat. Sci.* 46:1446-1454.
- Berg, L. S. 1964. Freshwater fishes of the USSR and adjacent countries, fourth edition, volume 2. Israeli Program for Scientific Translations, Jerusalem.
- Berkman, H. E., and C. F. Rabeni. 1987. Effects of siltation on stream fish communities. *Environ. Biol. Fishes* 18:285-294.
- Bernard, G., and M. G. Fox. 1997. Effects of body size and density on overwinter survival of age-0 pumpkinseeds. *N. Am. J. Fish. Manage.* 17:581-590.
- Berry, F. H., and L. R. Rivas. 1962. Data on six species of needlefishes (Belontiidae) from the western Atlantic. *Copeia* 1962:152-160.
- Bertschy, K. A., and M. G. Fox. 1999. The influence of age-specific survivorship on pumpkinseed sunfish life histories. *Ecology* 80(7):2299-2313.
- Besler, D. A. 1999. Utility of scales and whole otoliths for aging largemouth bass in North Carolina. *Proc. Annu. Conf. Southeast. Assoc. Fish Wildl. Agencies* 53:119-129.
- Bettross, E. 2000. Savannah River trout stocking evaluation. Presented at the 2000 Southern Division of the American Fisheries Society Midyear Meeting, Savannah, Ga. [Abstract only.]
- Bigelow, H. B., and W. C. Schroeder. 1953. Fishes of the Gulf of Maine. U.S. Fish Wildl. Serv. Fish. Bull. 53.
- Bilkovic, D. M. 2000. Assessment of spawning and nursery habitat suitability for American shad (*Alosa sapidissima*) in the Mattaponi and Pamunkey rivers. Doctoral dissertation. College of William and Mary, Williamsburg, Va.
- Black, D. A., and W. M. Howell. 1979. The North American mosquitofish, *Gambusia affinis*: a unique case in sex chromosome evolution. *Copeia* 1979:509-513.
- Blandon, M. D., R. Ward, T. L. King, W. J. Karel, and W. J. Monaghan Jr. 2001. Preliminary genetic population structure of southern flounder, *Paralichthys lethostigma*, along the Atlantic Coast and Gulf of Mexico. *Fish. Bull.* 99(4):671-678.
- Block, C. J., J. R. Spotila, E. A. Standora, and J. W. Gibbons. 1984. Behavioral thermoregulation of largemouth bass, *Micropterus salmoides*, and bluegill, *Lepomis macrochirus*, in a nuclear reactor cooling reservoir. *Environ. Biol. Fishes* 11(1):41-52.
- Blumer, L. S. 1985. Reproductive natural history of the brown bullhead *Ictalurus nebulosus* in Michigan. *Am. Midl. Nat.* 114(2):318-330.
- Blumer, L. S. 1986. The function of parental care in the brown bullhead *Ictalurus nebulosus*. *Am. Midl. Nat.* 115:234-238.
- Böhlke, J. 1956. A new pygmy sunfish from southern Georgia. *Notulae Naturae. Proc. Acad. Nat. Sci. Phila.* 294:11.
- Boltz, J. M., and J. R. Stauffer Jr. 1986. Branchial brooding in the pirate perch, *Aphredoderus sayanus* (Gilliams). *Copeia* 1986:1030-1031.
- Booth, D. J., and J. A. Keast. 1986. Growth energy partitioning by juvenile bluegill sunfish, *Lepomis macrochirus* Rafinesque. *J. Fish Biol.* 28:37-45.
- Borodin, N. 1925. Biological observations on the Atlantic sturgeon (*Acipenser sturio*). *Trans. Am. Fish. Soc.* 55:184-190.
- Boschung, H. T., and A. F. Hemphill. 1960. Marine fishes collected from inland streams of Alabama. *Copeia* 1960:73.
- Bosley, T. R., and J. V. Conner. 1984. Geographic and temporal variation in numbers of myomeres in fish larvae from the lower Mississippi River. *Trans. Am. Fish. Soc.* 113:238-242.
- Boughton, D. A., B. B. Collette, and A. R. McCune. 1991. Heterochrony in jaw morphology of needlefishes (Teleostei: Belontiidae). *Syst. Zool.* 40:329-354.
- Bowers, J. A. 1992. Synoptic surveys of regional reservoirs in

- South Carolina, 1988-1989. Savannah River Laboratory WSRC-92-RP-368, Westinghouse Savannah River Co., Aiken, S.C.
- Boxrucker, J. 1986. A comparison of the otolith and scale methods for aging white crappies in Oklahoma. *N. Am. J. Fish. Manage.* 6:122-125.
- Bozeman, E. L., and M. J. Van Den Avyle. 1989. Species profiles: life histories and environmental requirements of coastal fishes and invertebrates (South Atlantic)—alewife and blueback herring. *Biol. Rep.* 82(11.111), TR EL-82-4. U.S. Fish and Wildlife Service, National Wetlands Research Center, Washington D.C., and U.S. Army Corps of Engineers, Coastal Ecology Group—Waterways Experimental Station, Vicksburg, Miss.
- Braccia, A., and D. P. Batzer. 2001. Invertebrates associated with woody debris in a southeastern U.S. forested floodplain wetland. *Wetlands* 21:18-31.
- Brayton, S. L. 1981. Reproductive biology, energy content of tissues, and annual production of rainbow trout (*Salmo gairdneri*) in the South Fork of the Holston River, Virginia. Master's thesis, Virginia Polytechnic Institute and State University, Blacksburg.
- Breder, C. M. Jr. 1936. The reproductive habits of the North American sunfishes (family Centrarchidae). *Zoologica* 21(1):1-47.
- Breder, C. M. 1940. The nesting behavior of *Eupomotis gibbosus* (Linnaeus) in a small pool. *Zoologica* 23:353-360.
- Breder, C. M. Jr. 1962. Effects of a hurricane on the small fishes of a shallow bay. *Copeia* 1962:459-462.
- Breder, C. M. Jr., and A. C. Redmond. 1929. The bluespotted sunfish: a contribution to the life history and habits of *Enneacanthus* with notes on other Lepominae. *Zoologica* 9(10):379-401.
- Breder, C. M. Jr., and D. E. Rosen. 1966. Modes of reproduction in fishes. Natural History Press, Garden City, N.Y.
- Brenneman, W. M. 1992. Ontogenetic aspects of upper and lower stream reach cyprinid assemblages in a south Mississippi watershed. Doctoral dissertation, University of Southern Mississippi, Hattiesburg.
- Brill, J. S. 1977. Notes on the abortive spawning of the pirate perch, *Aphredoderus sayanus*, with comments on sexual distinctions. *Am. Currents* 5(4):10-16.
- Brim, J. 1991. Coastal plain fishes: floodplain utilization and the effects of impoundments. Master's thesis, University of South Carolina, Columbia.
- Brock, V. E. 1960. The introduction of aquatic animals into Hawaiian waters. *Int. Rev. ges. Hydrobiol.* 45:463-480.
- Brogensky, R. Y. 1960. Early development of the carp. Pages 129-149 in C. G. Krevanoski, editor. Works on the early development of bony fishes. *Stud. A. N. Stevertsova Inst. Anim. Morphol., Sov. Acad. Sci.* 28.
- Brown, J. A., and P. W. Colgan. 1981. The use of lateral-body bar markings in identification of young-of-year sunfish (*Lepomis*) in Lake Opinicon, Ontario. *Can. J. Zool.* 59:1852-1855.
- Brown, J. L. 1958. Geographic variation in southeastern populations of the cyprinodont fish *Fundulus notti* (Agassiz). *Am. Midl. Nat.* 59:477-488.
- Bryant, B. 1981. Chemosensory social behavior in catfish: responses in a social context. *Biol. Bull. Mar. Biol. Lab. Woods Hole* 161:340-341.
- Burbidge, R. G. 1974. Distribution, growth, selective feeding, and energy transformations of young-of-the-year blueback herring, *Alosa aestivalis* (Mitchill), in the James River, Virginia. *Trans. Am. Fish. Soc.* 1974:297-311.
- Burgess, G. H., C. R. Gilbert, V. Guillory, and D. C. Taphorn. 1977. Distributional notes on some north Florida freshwater fishes. *Fla. Sci.* 40:33-41.
- Burns, J. R. 1976. The reproductive cycle and its environmental control in the pumpkinseed, *Lepomis gibbosus* (Pisces: Centrarchidae). *Copeia* 1976(3):449-455.
- Burr, B. M., and L. M. Page. 1975. Distribution and life history notes on the taillight shiner *Notropis maculatus* in Kentucky. *Ky. Acad. Sci.* 36:71-74.
- Burr, B. M., and M. L. Warren Jr. 1986. A distributional atlas of Kentucky fishes. *Ky. Nat. Preserv. Comm. Sci. Tech. Ser.* 4:398.
- Burr, B. M., M. L. Warren Jr., and K. S. Cummings. 1988. New distributional records of Illinois fishes with additions to the known fauna. *Trans. Ill. Acad. Sci.* 81:163-170.
- Burr, B. M., M. L. Warren Jr., and R. C. Heidinger. 1989. Reproductive potential and habitat of the ironcolor shiner, *Notropis chalybaeus*, in Illinois. Final report submitted to Illinois Endangered Species Board.
- Buynak, G. L., and H. W. Mohr. 1978. Larval development of the redbreast sunfish (*Lepomis auritus*) from the Susquehanna River. *Trans. Am. Fish. Soc.* 107(4):600-604.
- Cahn, A. R. 1927. An ecological study of southern Wisconsin fishes: the brook silverside (*Labidesthes sicculus*) and the sisco (*Leucichthys artedi*) in their relations to the region. *Ill. Biol. Monogr.* 11:1-151.
- Cargnelli, L., and M. R. Gross. 1997. The temporal dimension in fish recruitment: birth date, body size, and size-dependent survival in a sunfish (bluegill: *Lepomis macrochirus*). *Can. J. Fish. Aquat. Sci.* 53:360-367.
- Carlander, K. D. 1953. Handbook of freshwater fishery biology with the supplement. Brown, Dubuque, Iowa.
- Carlander, K. D. 1969. Handbook of freshwater fishery biology. Volume 1: Life history data on freshwater fishes of the United States and Canada, exclusive of the Perciformes. Iowa State University Press, Ames.
- Carlander, K. D. 1977. Handbook of freshwater fishery biol-

- ogy. Volume 2: Life history data on centrarchid fishes of the United States and Canada. Iowa State University Press, Ames.
- Carlson, D. M., and K. W. Simpson. 1987. Gut contents of juvenile shortnose sturgeon in the upper Hudson estuary. *Copeia* 1987:796-802.
- Carlson, J. E., and M. J. Duever. 1977. Seasonal fish population fluctuations in a south Florida swamp. Proc. Annu. Conf. Southeast. Assoc. Fish Wildl. Agencies 31:603-611.
- Carr, A. F., and L. Giovannoli. 1950. The fishes of the Choloteca drainage of southern Honduras. Occas. Pap. Mus. Zool. Univ. Mich. 523:1-38.
- Carr, A. F., and C. J. Goin. 1955. Guide to the reptiles, amphibians, and freshwater fishes of Florida. University of Florida Press, Gainesville.
- Carr, A. F. Jr., and C. J. Goin. 1959. Reptiles, amphibians and freshwater fishes of Florida. University of Florida Press, Gainesville.
- Carr, M. G., E. J. Carr, and S. R. Johnson. 1987. Seasonal changes in territoriality and frequency of agonistic behavior in two densities of juvenile brown bullhead, *Ictalurus nebulosus*. *Environ. Biol. Fishes* 19:175-181.
- Carr, M. H. 1946. Notes on the breeding habitats of the eastern stumpknocker, *Lepomis punctatus punctatus* (Cuvier). *J. Fla. Acad. Sci.* 9:101-106.
- Carscadden, J. E., and W. C. Leggett. 1975. Meristic differences in spawning populations of American shad, *Alosa sapidissima*: evidence for homing to tributaries in the St. John River, New Brunswick. *J. Fish. Res. Board Can.* 32:653-660.
- Cartier, D., and E. Magnin. 1967. La croissance en longueur et en poids de *Amia calva* L. de la région de Montreal. *Can. J. Zool.* 45:797-804.
- Cashner, R. C., B. M. Burr, and J. S. Rogers. 1989. Geographic variation of the mud sunfish, *Acantharchus pomotis* (family Centrarchidae). *Copeia* 1989(1):129-141.
- Cashner, R. C., and W. J. Matthews. 1988. Changes in the known Oklahoma fish fauna from 1973 to 1988. *Proc. Okla. Acad. Sci.* 68:1-7.
- Cassani, J. R., and D. Maloney. 1991. Grass carp movement in two morphologically diverse reservoirs. *J. Aquat. Plant Manage.* 29:83-88.
- Casterlin, M. E., and W. W. Reynolds. 1980. Diel activity of the bluespotted sunfish *Enneacanthus gloriosus*. *Copeia* 1980(2):344-345.
- Castonguay, M., P. V. Hodson, and C. M. Couillard. 1994. Why is recruitment of American eel, *Anguilla rostrata*, declining in the St. Lawrence River and Gulf? *Can. J. Fish. Aquat. Sci.* 51:479-488.
- Chan, T. Y., and A. J. R. Ribbink. 1990. Alternative reproductive behavior in fishes with particular reference to *Lepomis macrochirus* and *Pseudocrenilabrus philander*. *Environ. Biol. Fishes* 28:249-256.
- Chapleau, F. 1993. Pleuronectiform relationships—a cladistic reassessment. *Bull. Mar. Sci.* 52(1):516-540.
- Chapleau, F., and A. Keast. 1988. A phylogenetic reassessment of the monophyletic status of the family Soleidae, with comments on the suborder Soleoidea (Pisces, Pleuronectiformes). *Can. J. Zool.* 66(12):2797-2810.
- Chen, S. C. 1926. The development of the goldfish, *Carassius auratus*, as affected by being out of water, in distilled water, and solutions of alcohol. *China J. Sci. Arts* 4:294-303.
- Chew, R. L. 1974. Early life history of the Florida largemouth bass. *Fish Bull.* 7:76. Florida Game and Freshwater Fish Commission, Tallahassee.
- Chilton, E. W., and M. I. Muoneke. 1992. Biology and management of grass carp (*Ctenopharyngodon idella*, Cyprinidae) for vegetation control: a North American perspective. *Rev. Fish Biol. Fish.* 2:283-320.
- Chittenden, M. E. Jr. 1976. Weight loss, mortality, feeding, and duration of residence of adult American shad, *Alosa sapidissima*, in fresh water. *Fish. Bull.* 74:151-157.
- Christel-Rose, L. M. 1994. Historical wetlands mapping and GIS processing for the Savannah River Site database. EGG-11265-1018. EG&G Energy Measurements, Inc., Las Vegas, Nev.
- Clark, F. W., and M. H. A. Keenleyside. 1967. Reproductive isolation between the sunfish *Lepomis gibbosus* and *L. macrochirus*. *J. Fish. Res. Board Can.* 24:495-514.
- Clark, K. E. 1978. Ecology and life history of the speckled madtom, *Noturus leptacanthus* (Ictaluridae). Master's thesis, University of Richmond, Va.
- Clemmer, G. H., R. D. Suttkus, and J. S. Ramsey. 1975. A preliminary checklist of endangered and rare fishes of Mississippi. Pages 6-11 in Preliminary list of rare and threatened vertebrates in Mississippi. Mississippi Game and Fish Commission, Jackson.
- Clemmons, M. M., and D. G. Lindquist. 1983. Reproductive biology of the swamp darter in Lake Waccamaw, North Carolina. Page 12 in Abstracts of the 63rd Annual Meeting of the American Society of Ichthyologists and Herpetologists.
- Cloutman, D. G., and R. D. Harrell. 1987. Life history notes on the whitefin shiner, *Notropis niveus* (Pisces: Cyprinidae), in the Broad River, South Carolina. *Copeia* 4:1037-1040.
- Clugston, J. P. 1966. Centrarchid spawning in the Florida Everglades. *Q. J. Fla. Acad. Sci.* 29:137-143.
- Clugston, J. P. 1973. The effects of heated effluents from a nuclear reactor on species diversity, abundance, reproduction, and movement of fish. Doctoral dissertation, University of Georgia, Athens.

- Clugston, J. P., and E. L. Cooper. 1960. Growth of the common eastern madtom, *Noturus insignis*, in central Pennsylvania. *Copeia* 1960:9-16.
- Clugston, J. P., J. L. Oliver, and R. Ruelle. 1978. Reproduction, growth, and standing crops of yellow perch in southern reservoirs. *Am. Fish. Soc. Spec. Pub.* 11:89-99.
- Cochran, P. A. 1996. Cavity enhancement by madtoms (genus *Noturus*). *J. Freshw. Ecol.* 11:521-522.
- Cohen, A. B. 1977. Life history of the banded sunfish (*Etheostoma caeruleum*) in Green Falls Reservoir, Connecticut. Master's thesis, University of Connecticut, Storrs.
- Colbourne, J. K., B. D. Neff, J. M. Wright, and M. R. Gross. 1996. DNA fingerprinting of bluegill sunfish (*Lepomis macrochirus*) using (GT)<sub>n</sub> microsatellites and its potential for assessment of mating success. *Can. J. Fish. Aquat. Sci.* 53:342-349.
- Cole, C. F. 1967. A study of the eastern Johnny darter, *Etheostoma olmstedii storer* (Teleostei, Percidae). *Chesapeake Sci.* 8(1):28-51.
- Colgan, P. W., W. A. Nowell, M. R. Gross, and J. W. Grant. 1979. Aggressive habituation and rim-circling in the social organization of bluegill sunfish (*Lepomis macrochirus*). *Environ. Biol. Fishes* 4:29-36.
- Collette, B. B. 1962. The swamp darters of the subgenus *Holelepis* (Pisces, Percidae). *Tulane Stud. Zool.* 9:115-211.
- Collette, B. B., and G. Klein-MacPhee, editors. 2002. Bigelow's and Schroeder's fishes of the Gulf of Maine. Smithsonian Institution Press, Washington, D.C.
- Collins, M. R., S. G. Rogers, and T. I. J. Smith. 1996. Bycatch of sturgeon along the southern Atlantic coast of the USA. *N. Am. J. Fish. Manage.* 16:24-29.
- Collins, M. R., S. G. Rogers, T. I. J. Smith, and M. L. Moser. 2000b. Primary factors affecting sturgeon populations in the southeastern United States: fishing mortality and degradation of essential habitats. *Bull. Mar. Sci.* 66:917-928.
- Collins, M. R., and T. I. J. Smith. 1993. Characteristics of the adult segment of the Savannah River population of shortnose sturgeon. *Proc. Annu. Conf. Southeast. Assoc. Fish Wildl. Agencies* 47:485-491.
- Collins, M. R., and T. I. J. Smith. 1997. Distributions of shortnose and Atlantic sturgeons in South Carolina. *N. Am. J. Fish. Manage.* 17:995-1000.
- Collins, M. R., T. I. J. Smith, W. C. Post, and O. Pashuk. 2000a. Habitat utilization and biological characteristics of adult Atlantic sturgeon in two South Carolina rivers. *Trans. Am. Fish. Soc.* 129:982-988.
- Collins, M. R., T. I. J. Smith, K. Ware, and J. Quatto. 1999. Culture and stock enhancement of shortnose and Atlantic sturgeons. *Bull. Natl. Res. Inst. Agric., Suppl.* 1:101-108.
- Collins, N. C., and S. G. Hinch. 1993. Diel and seasonal variation in foraging activities of pumpkinseeds in an Ontario pond. *Trans. Am. Fish. Soc.* 122:357-365.
- Congdon, B. C. 1995. Unidirectional flow and maintenance of genetic diversity in mosquitofish *Gambusia holbrooki* (Teleostei: Poeciliidae). *Copeia* 1995:162-172.
- Conner, J. V., R. P. Gallagher, and M. F. Chatry. 1980. Larval evidence for natural reproduction of the grass carp (*Ctenopharyngodon idella*) in the lower Mississippi River. Pages 1-19 in L. A. Fuiman, editor. Proceedings of the Fourth Annual Larval Fish Conference. FWS/OBS-80/43. U.S. Fish and Wildlife Service, Biological Services Program, National Power Plant Team, Ann Arbor, Mich.
- Conner, J. V., and R. D. Suttkus. 1986. Zoogeography of freshwater fishes of the western Gulf slope of North America. Pages 413-456 in C. H. Hocutt and E. O. Wiley, editors. The zoogeography of North American freshwater fishes. John Wiley and Sons, New York.
- Conover, D. O., and B. E. Kynard. 1984. Field and laboratory observations of spawning periodicity and behavior of a northern population of the Atlantic silverside, *Menidia menidia* (Pisces: Atherinidae). *Environ. Biol. Fishes* 11:161-171.
- Constantz, G. D. 1985. Allopaternal care in the tessellated darter, *Etheostoma olmstedii* (Pisces: Percidae). *Environ. Biol. Fishes* 14:175-183.
- Coomer, C. E. Jr., D. R. Holder, and C. D. Swanson. 1977. A comparison of the diets of redbreast sunfish and spotted sucker in a Coastal Plain stream. *Proc. Annu. Conf. Southeast. Assoc. Fish Wildl. Agencies* 31:587-596.
- Cooner, R. W., and D. R. Bayne. 1982. Diet overlap in redbreast and longear sunfishes from small streams of east central Alabama. *Proc. Annu. Conf. Southeast. Assoc. Fish Wildl. Agencies* 36:106-114.
- Cooper, G. P. 1936. Age and growth of the golden shiner (*Notemigonus crysoleucas auratus*) and its suitability for propagation. *Mich. Acad. Sci. Arts* 21:587-597.
- Cooper, G. P. 1941. A biological survey of the Androscoggin and Kennebec river drainage systems in Maine. *Fish Surv. Rep.* 4:238. Maine Department of Inland Fish and Game.
- Cooper, J. C., and T. T. Polgar. 1981. Recognition of year-class dominance in striped bass management. *Trans. Am. Fish. Soc.* 110:180-187.
- Copp, G. H. 1989. The habitat diversity and fish reproductive function of floodplain ecosystems. *Environ. Biol. Fishes* 26:1-27.
- Côté, I. M., and M. R. Gross. 1993. Reduced disease in offspring: a benefit of coloniality in sunfish. *Behav. Ecol. Sociobiol.* 33:269-274.
- Courtenay, W. R., D. A. Hensley, J. N. Taylor, and J. A. McCann. 1984. Distribution of exotic fishes in the conti-

- mental United States. Pages 41-77 in W. R. Courtenay and J. R. Stauffer, editors. Distribution biology and management of exotic fishes. Johns Hopkins University Press, Baltimore, Md.
- Courtenay, W. R. Jr., D. P. Jennings, and J. D. Williams. 1991. Appendix 2: Exotic fishes. Pages 97-107 in C. R. Robins, R. M. Bailey, C. E. Bond, J. R. Brooker, E. A. Lachner, R. N. Lea, and W. B. Scott, editors. Common and scientific names of fishes from the United States and Canada, 5th edition. Am. Fish. Soc. Spec. Pub. 20. American Fisheries Society, Bethesda, Md.
- Cowell, B. C., and B. S. Barnett. 1974. Life history of the taillight shiner, *Notropis maculatus*, in central Florida. Am. Midl. Nat. 91:282-293.
- Cowell, B. C., and C. H. Resico Jr. 1975. Life history patterns in the coastal shiner, *Notropis petersoni*, Fowler. Fla. Sci. 38(2):113-121.
- Crabtree, R. E., E. C. Cyr, D. C. Chaverri, W. O. McLarney, and J. M. Davis. 1997. Reproduction of tarpon (*Megalops atlanticus*) from Florida and Costa Rican waters and notes on their ages and growth. Bull. Mar. Sci. 61:271-285.
- Crabtree, R. E., E. C. Cyr, and J. M. Dean. 1995. Age and growth of tarpon (*Megalops atlanticus*) from south Florida waters. Fish. Bull. 93:619-628.
- Craig, J. F. 1996. Pike—biology and exploitation. Chapman and Hall Fish and Fisheries series 19. Chapman and Hall, New York.
- Craig, J. F. 2000. Percid fishes—systematics, ecology and exploitation. Fish and Aquatic Resources series 3. Blackwell Science, Oxford, England.
- Crance, J. H. 1984. Habitat suitability index models and in-stream flow suitability curves: inland stocks of striped bass. FWS/OBS-82/10.85. U.S. Fish and Wildlife Service, Washington, D.C.
- Crawford, R. W. 1956. A study of the distribution and taxonomy of the percid fish, *Percina nigrofasciata* (Agassiz). Tulane Stud. Zool. 4:3-55.
- Cross, D. G. 1969. Aquatic weed control using grass carp. J. Fish Biol. 1:27-30.
- Crossman, E. J. 1960. Variations in number and asymmetry in branchiostegal rays in the family Esocidae. Can. J. Zool. 38:363-375.
- Crossman, E. J. 1962. The redfin pickerel, *Esox americanus*, in North Carolina. Copeia 1962:114-123.
- Crossman, E. J. 1978. Taxonomy and distribution of North American esocids. Am. Fish. Soc. Spec. Pub. 11:13-26.
- Crossman, E. J. 1996. Taxonomy and distribution. Pages 1-11 in J. F. Craig, editor. Pike—biology and exploitation. Chapman and Hall Fish and Fisheries series 19, Chapman and Hall, New York.
- Crossman, E. J., and K. Buss. 1965. Hybridization in the family Esocidae. J. Fish. Res. Board Can. 22:1261-1292.
- Crumpton, J. 1971. Food habits of longnose gar (*Lepisosteus osseus*) and Florida gar (*Lepisosteus platyrhincus*) collected from five central Florida lakes. Proc. Annu. Conf. Southeast. Assoc. Game Fish Comm. 24(1970):419-424.
- Cruz, G. A. 1987. Reproductive biology and feeding habits of cuyamel, *Joturus pichardi*, and tepemechin, *Agonostomus monticola* (Pisces; Mugilidae) from Río Platano, Mosquitia, Honduras. Bull. Mar. Sci. 40:63-72.
- Cudmore-Vokey, B., and E. J. Crossman. 2000. Checklists of the fish fauna of the Laurentian Great Lakes and their connecting channels. Can. Manuscr. Rep. Fish. Aquat. Sci. 2550.
- Curran, H. W., and D. T. Ries. 1937. Fisheries investigations in the lower Hudson River. Pages 124-145 in A biological survey of the lower Hudson watershed. 26th Annu. Rep. New York State Conserv. Dep. (Suppl.), Albany.
- Curry, K. D., and A. Spacie. 1984. Differential use of stream habitat by spawning catostomids. Am. Midl. Nat. 111:267-279.
- Dadswell, M. J. 1976. Biology of the shortnose sturgeon, *Acipenser brevirostrum* LeSueur, in the St. John River estuary, New Brunswick. Trans. Can. Soc. Environ. Biol., Atlantic Chapter Annual Meeting 1975:20-72.
- Dadswell, M. J., B. D. Taubert, T. S. Squires, D. Marchette, and J. Buckley. 1984. Synopsis of biological data on shortnose sturgeon, *Acipenser brevirostrum* Lesueur 1818. NOAA/NMFS Tech. Rep. 14.
- Dahlberg, M. D. 1971. Fecundity of yellow perch, *Perca flavescens* Mitchill, in the Patuxent River, Maryland. Chesapeake Sci. 12:270-284.
- Dahlberg, M. D. 1975. Guide to the coastal fishes of Georgia and nearby states. University of Georgia Press, Athens.
- Dahlberg, M. D., and D. C. Scott. 1971a. The freshwater fishes of Georgia. Bull. Ga. Acad. Sci. 29:1-64.
- Dahlberg, M. D., and D. C. Scott. 1971b. Introductions of freshwater fishes in Georgia. Bull. Ga. Acad. Sci. 29:245-252.
- D'Amours, J., S. Thibodeau, and R. Fortin. 2001. Comparison of lake sturgeon (*Acipenser fulvescens*), *Stizostedion* spp., *Catostomus* spp., *Moxostoma* spp., quillback (*Carpoides cyprinus*), and mooneye (*Hiodon tergisus*) larval drift in Des Prairies River, Quebec. Can. J. Zool./Rev. Can. Zool. 79:1472-1489.
- Danylchuk, A. J., and M. G. Fox. 1994a. Seasonal reproductive patterns of pumpkinseed (*Lepomis gibbosus*) populations with varying body size characteristics. Can. J. Fish. Aquat. Sci. 51:490-500.
- Danylchuk, A. J., and M. G. Fox. 1994b. Age and size-

- dependant variation in the seasonal timing and probability of reproduction among mature female pumpkinseed, *Lepomis gibbosus*. Environ. Biol. Fishes 39:119-127.
- Darr, D. P. 1987. A water quality assessment of Langley Pond, Aiken County, South Carolina. Tech. Rep. 010-86. South Carolina Department of Health and Environmental Control, Columbia.
- Darr, D. P. 1988. Letter to South Carolina Wildlife and Marine Resources Department reporting on collection of fish during tissue analysis sampling on Langley Pond. South Carolina Department of Health and Environmental Control, Columbia.
- Davis, B. J., and R. J. Miller. 1967. Brain patterns in minnows of the genus *Hybopsis* in relation to feeding habits and habitat. Copeia 1967:1-39.
- Davis, B. M., and J. W. Foltz. 1991. Food of blueback herring and threadfin shad in Jocassee Reservoir, South Carolina. Trans. Am. Fish. Soc. 120:605-613.
- Davis, J. R. 1971. The spawning behavior, fecundity rates, and food habits of the redbreast sunfish in southeastern North Carolina. Proc. Annu. Conf. Southeast. Assoc. Game Fish Comm. 25:556-560.
- Davis, J. R., and D. E. Louder. 1971. Life history and ecology of the cyprinid fish *Notropis petersoni* in North Carolina waters. Trans. Am. Fish. Soc. 100:726-733.
- Davis, S. M. 1980. American shad movement, weight loss and length frequencies before and after spawning in the St. Johns River, Florida. Copeia 1980(4):889-892.
- Davis, W. L. 1980. A comparative food habit analysis of channel and blue catfishes in Kentucky and Barkley Lakes, Kentucky. Master's thesis, Murray State University, Murray, Ky. Published by Kentucky Department of Fish and Wildlife Resources.
- Dean, B. 1895. Fishes and living fossils. Macmillan, New York.
- Dean, B. 1899. On the dogfish (*Amia calva*), its habits and breeding. Annu. Rep. N.Y. Comm. Fish. Game For. 4(1898):246-256.
- Dederen, L. H. T., R. S. E. Leuven, S. E. Wendelaar Bonga, and F. G. F. Oyen. 1986. Biology of the acid-tolerant fish species *Umbra pygmaea* (De Kay, 1842). J. Fish Biol. 28(3):307-326.
- DeMeo, T. A. 2001. Report of the Robust Redhorse Conservation Committee annual meeting, 11-12 October 2000. Charlie Elliott Wildlife Center, Georgia.
- DeMont, D. J. 1982. Use of *Lepomis macrochirus* Rafinesque nests by spawning *Notemigonus crysoleucas* (Mitchill) (Pisces: Centrarchidae and Cyprinidae). Brimleyana 8:61-63.
- Derrick, P. A., and V. S. Kennedy. 1997. Prey selection by the hogchoker, *Trinectes maculatus* (Pisces: Soleidae), along summer salinity gradients in Chesapeake Bay, USA. Mar. Biol. 129:699-712.
- Devaraj, K. V. 1974. Food of white catfish, *Ictalurus catus* (Linn.) (Ictaluridae) stocked in farm ponds. Int. Rev. ges. Hydrobiol. 59:147-151.
- DeVries, D. R. 1990. Habitat use by bluegill in laboratory pools: where is the refuge when macrophytes are sparse and alternative prey are present? Environ. Biol. Fishes 29:27-34.
- DeWoody, J. A., D. E. Fletcher, M. Mackiewicz, S. D. Wilkins, and J. C. Avise. 2000a. The genetic mating system of spotted sunfish (*Lepomis punctatus*): mate numbers and the influence of male reproductive parasites. Mol. Ecol. 9:2119-2128.
- DeWoody, J. A., D. E. Fletcher, S. D. Wilkins, and J. C. Avise. 2000b. Parentage and nest guarding in the tessellated darter (*Etheostoma olmstedii*) assayed by microsatellite markers (Perciformes: Percidae). Copeia 2000:740-747.
- DeWoody, J. A., D. E. Fletcher, S. D. Wilkins, and J. C. Avise. 2001. Genetic documentation of filial cannibalism in nature. Proc. Nat. Acad. Sci. USA 98:5090-5092.
- DeWoody, J. A., D. E. Fletcher, S. D. Wilkins, W. S. Nelson, and J. C. Avise. 1998. Molecular genetic dissection of spawning, parentage, and reproductive tactics in a population of redbreast sunfish, *Lepomis auritus*. Evolution 52(6):1802-1810.
- DeWoody, J. A., D. E. Fletcher, S. D. Wilkins, W. S. Nelson, and J. C. Avise. 2000c. Genetic monogamy and biparental care in an externally fertilizing fish, the largemouth bass (*Micropterus salmoides*). Proc. R. Soc. London B 267:2431-2437.
- Dill, W. A., and A. J. Cordone. 1997. History and status of introduced fishes in California, 1871-1996. Manuscr. Fish Bull. Calif. Dep. Fish Game.
- Dilts, E. W., and C. A. Jennings. 1999. Effects of fine sediment and gravel quality on survival to emergence of larval robust redhorse *Moxostoma robustum*. Presented at the 1999 Southern Division of the American Fisheries Society Midyear Meeting, Chattanooga, Tenn.
- Dimmick, W. W. 1988. Ultrastructure of North American cyprinid maxillary barbels. Copeia 1988:72-80.
- Ditty, J. G., and R. F. Shaw. 1996. Spatial and temporal distribution of larval striped mullet (*Mugil cephalus*) and white mullet (*M. curema*, family: Mugilidae) in the northern Gulf of Mexico, with notes on mountain mullet, *Agonostomus monticola*. Bull. Mar. Sci. 59:271-288.
- Dixon, D. A., editor. 2003. Biology, management and protection of catadromous eels. Am. Fish. Soc. Symp. Ser. 33. American Fisheries Society, Bethesda, Md.
- Dixon, D. A., J. D. Goins, J. E. Olney, and J. G. Loesch.

1998. Recapture of oxytetracycline (OTC) marked juvenile American shad (*Alosa sapidissima*) in the Pamunkey River, Virginia: 1995–1997. Proceedings of the 1998 Southern Division of the American Fisheries Society Midyear Meeting held in Lexington, Ky. [Abstract only.]
- Dizon, A. E., R. M. Horrall, and A. D. Hasler. 1973. Meristic characters of some marine fishes of the western Atlantic Ocean. *Fish. Bull.* 71:301–317.
- Dodson, J. J., and W. C. Leggett. 1974. Role of olfaction and vision in the behavior of American shad (*Alosa sapidissima*) homing to the Connecticut River from Long Island Sound. *J. Fish. Res. Board Can.* 31:1607–1619.
- DOE [U.S. Department of Energy]. 1984. Final environmental impact statement: L-Reactor operation, Savannah River Plant, Aiken, S.C. DOE/EIS-0108. U.S. Department of Energy, Savannah River Operations Office, Aiken, S.C.
- DOE [U.S. Department of Energy]. 1988. Impingement and entrainment at the river water intakes of the Savannah River Plant. CORR-860402. Savannah River Operations Office, Aiken, S.C.
- DOE [U.S. Department of Energy]. 1990. Final environmental impact statement: continued operation of K-, L-, and P-Reactors at the Savannah River Site, Aiken, S.C. DOE/EIS-0147. U.S. Department of Energy, Savannah River Operations Office, Aiken, S.C.
- DOE [U.S. Department of Energy]. 1993. Supplement 2 to Par Pond special environmental analysis, observed environmental impacts. Savannah River Operations Office, Savannah River Site, Aiken, S.C.
- DOE [U.S. Department of Energy]. 1995. Environmental assessment for the natural fluctuation of water level in Par Pond and reduced water flow in Steel Creek below L-Lake at the Savannah River Site. DOE/EA/1070. Savannah River Operations Office, Aiken, S.C.
- DOE [U.S. Department of Energy]. 1999. Environmental assessment for the Pond B Dam repair project at the Savannah River Site. DOE/EA-1285. Savannah River Operations Office, Aiken, S.C.
- Dominey, W. J. 1980. Female mimicry in male bluegill sunfish—a genetic polymorphism? *Nature* 284:546–548.
- Dominey, W. J. 1981a. Maintenance of female mimicry as a reproductive strategy in bluegill sunfish (*Lepomis macrochirus*). *Environ. Biol. Fishes* 6:59–64.
- Dominey, W. J. 1981b. Anti-predator function of bluegill sunfish nesting colonies. *Nature* 290:586–588.
- Douglas, N. H. 1974. Freshwater fishes of Louisiana. Louisiana Wildlife and Fish Commission, Baton Rouge.
- Dovel, W. L., and T. J. Berggren. 1983. Atlantic sturgeon of the Hudson estuary, New York. *N.Y. Fish Game J.* 30:140–172.
- Dovel, W. L., J. A. Mihursky, and A. J. McErlean. 1969. Life history aspects of the hogchoker, *Trinectes maculatus*, in the Patuxent River estuary, Maryland. *Chesapeake Sci.* 10:104–119.
- Drake, M. T., J. E. Claussen, D. P. Philipp, and D. L. Pereira. 1997. A comparison of bluegill reproductive strategies and growth among lakes with different fishing intensities. *N. Am. J. Fish. Manage.* 17:496–507.
- Drenner, R. W., F. deNoyelles Jr., and D. Kettle. 1982. Selective impact of filter-feeding gizzard shad on zooplankton community structure. *Limnol. Oceanogr.* 27:965–968.
- Drenner, R. W., J. R. Mummert, F. deNoyelles Jr., and D. Kettle. 1984. Selective particle ingestion by a filter-feeding fish and its impact on phytoplankton community structure. *Limnol. Oceanogr.* 29:941–948.
- Drenner, R. W., J. D. Smith, and S. T. Threlkeld. 1996. Lake trophic state and the limnological effects of omnivorous fish. *Hydrobiologia* 319:213–223.
- Drenner, R. W., S. T. Threlkeld, and M. D. McCracken. 1986. Experimental analysis of the direct and indirect effects of an omnivorous filter-feeding clupeid on plankton community structure. *Can. J. Fish. Aquat. Sci.* 43:1935–1945.
- Dudley, R. G., A. W. Mullis, and J. W. Terrell. 1977. Movements of adult striped bass (*Morone saxatilis*) in the Savannah River, Georgia. *Trans. Am. Fish. Soc.* 106:314–322.
- Dunham, R. A., and W. F. Childers. 1980. Genetics and implications of the golden color morph in green sunfish. *Progr. Fish-Cult.* 42(3):160–163.
- Dunham, R. A., C. Hyde, M. Masser, J. A. Plumb, R. O. Smitherman, R. Perez, and A. C. Ramboux. 1993. Comparison of culture traits of channel catfish, *Ictalurus punctatus*, and blue catfish, *I. furcatus*. *J. Appl. Aquacult.* 3:257–268.
- Du Pont [E. I. du Pont de Nemours and Co.]. 1987. Comprehensive cooling water study. Volume 3: Radionuclide and heavy metal transport, M. W. Lower, editor. DP-1730-3. Savannah River Laboratory, Aiken, S.C.
- Duryea, R., J. Donnelly, D. Gutherie, C. O'Malley, M. Romanowski, and R. Schmidt. 1996. *Gambusia affinis* effectiveness in New Jersey mosquito control. Proceedings of the Eighty-third Annual Meeting of the New Jersey Mosquito Control Association, Inc., 95–102.
- Eberts, R. C. Jr., V. J. Santucci, and D. H. Wahl. 1998. Suitability of the lake chubsucker as prey for largemouth bass in small impoundments. *N. Am. J. Fish. Manage.* 18:295–307.
- Echelle, A. A. 1968. Food habits of young-of-year longnose gar in Lake Texoma, Oklahoma. *Southwest. Nat.* 13:45–50.

- Echelle, A. A., and C. D. Riggs. 1972. Aspects of the early life history of gars (*Lepisosteus*) in Lake Texoma. *Trans. Am. Fish. Soc.* 101:106-112.
- Edds, D. R., W. J. Matthews, and F. P. Gelwick. 2002. Resource use by large catfish in a reservoir: is there evidence for interactive segregation and innate differences? *J. Fish Biol.* 60:739-750.
- Edsall, T. A. 1964. Feeding by three species of fishes on the eggs of spawning alewives. *Copeia* 1964:226-227.
- Ehlinger, T. J. 1997. Male reproductive competition and sex-specific growth patterns in bluegill. *N. Am. J. Fish. Manage.* 17:508-515.
- Elder, H. S., and B. R. Murphy. 1997. Grass carp (*Ctenopharyngodon idella*) in the Trinity River, Texas. *J. Freshw. Ecol.* 12:281-289.
- Eldridge, M. B., J. A. Whipple, D. Eng, M. J. Bowers, and B. M. Jarvis. 1981. Effects of food and feeding factors on laboratory-reared striped bass larvae. *Trans. Am. Fish. Soc.* 110:111-120.
- Emboly, G. C. 1914. The horned dace. *Nat. Stud. Rev.* 10:168-174.
- EPA [U.S. Environmental Protection Agency]. 2000. Total maximum daily load (TMDL) development for total mercury in the middle/lower Savannah River, Ga. USEPA Region 4, Atlanta, Ga.
- Epifanio, J. M., M. Hooe, D. H. Buck, and D. P. Philipp. 1999. Reproductive success and assortative mating among *Pomoxis* species and their hybrids. *Trans. Am. Fish. Soc.* 128:104-120.
- EPRI [Electric Power Research Institute]. 1999. American eel (*Anguilla rostrata*) scoping study: a literature and data review of life history, stock status, population dynamics, and hydroelectric impacts. TR-111873. EPRI, Palo Alto, Calif.
- Erdman, D. S. 1972. Inland game fishes of Puerto Rico. P.R. Fed. Aid Proj. F-1-20. Job 7, 4(2):1-96. Department of Agriculture, Commonwealth of Puerto Rico.
- Erdman, D. S. 1984. Exotic fishes in Puerto Rico. Pages 162-176 in W. R. Courtenay Jr. and J. R. Stauffer Jr., editors. *Distribution, biology, and management of exotic fishes*. Johns Hopkins University Press, Baltimore, Md.
- Erickson, J. G. 1953. Age and growth of the black and white crappies, *Pomoxis nigromaculatus* (Lesueur) and *P. annularis* Rafinesque, in Clear Lake, Iowa. *Iowa State J. Sci.* 26:491-505.
- Esch, G. W., and T. C. Hazen. 1978. Thermal ecology and stress: a case history for red-sore disease in largemouth bass. Pages 331-363 in J. H. Thorp and J. W. Gibbons, editors. *Energy and environmental stress in aquatic systems*. DOE Symp. Ser. CONF-771114.
- Esch, G. W., and T. C. Hazen. 1980. Stress and body condition in a population of largemouth bass: implications for red-sore disease. *Trans. Am. Fish. Soc.* 109:532-536.
- Esch, G. W., T. C. Hazen, R. V. Dimock, and J. W. Gibbons. 1976. Thermal effluent and epizootiology of the ciliate *Epistylis* and the bacterium *Aeromonas hydrophila* in association with centrarchid fish. *Trans. Am. Microsc. Soc.* 95:687-693.
- Etnier, D. A., and W. C. Starnes. 1993. *The fishes of Tennessee*. University of Tennessee Press, Knoxville.
- Eure, H. 1976. Seasonal abundance of *Neoechinorhynchus cylindricus* taken from largemouth bass (*Micropterus salmoides*) in a heated reservoir. *Parasitology* 73:355-370.
- Faber, D. J. 1963. Larval fish from the pelagial region of two Wisconsin lakes. Doctoral dissertation, University of Wisconsin, Madison.
- Fahay, M. P. 1978. Biological and fisheries data on American eel, *Anguilla rostrata* (LeSueur). NMFS, NOAA, Tech. Ser. Rep. 17:82. Sandy Hook Laboratory, Northeast Fisheries Center.
- Farmer, C. G., and D. C. Jackson. 1998. Air-breathing during activity in the fishes *Amia calva* and *Lepisosteus oculatus*. *J. Exp. Biol.* 201(7):943-948.
- Fearnow, E. C. 1925. Goldfish. Their care in small aquaria and ponds. U.S. Comm. Fish. Rep. 1924 (Append. 7): 445-458.
- Felley, J. D., and L. G. Hill. 1983. Multivariate assessment of environmental preferences of cyprinid fishes of the Illinois River, Oklahoma. *Am. Midl. Nat.* 109:209-221.
- Finger, T. R., and E. M. Stewart. 1987. Response of fishes to flooding regime in lowland hardwood wetlands. Pages 86-104 in W. J. Matthews and D. C. Heins, editors. *Community and evolutionary ecology of North American stream fishes*. University of Oklahoma Press, Norman.
- Fish, M. P. 1932. Contributions to the early life history of sixty-two species of fishes from Lake Erie and its tributaries. U.S. Bur. Fish. Bull. 47:293-398.
- Flemer, D. A., and W. S. Woolcott. 1966. Food habits and distribution of the fishes of Tuckahoe Creek, Virginia, with special emphasis on the bluegill, *Lepomis m. macrochirus* Rafinesque. *Chesapeake Sci.* 7:75-89.
- Fletcher, D. E. 1993. Nest association of dusky shiners (*Notropis cummingsae*) and redbreast sunfish (*Lepomis auritus*), a potentially parasitic relationship. *Copeia* 1993(1):159-167.
- Fletcher, D. E., and B. M. Burr. 1992. Reproductive biology, larval description, and diet of the North American bluehead shiner, *Pteronotrops hubbsi* (Cypriniformes: Cyprinidae), with comments on conservation status. *Ichthyol. Explor. Freshw.* 3:193-218.
- Fletcher, D. E., E. E. Dakin, B. A. Porter, and J. C. Avise.

2004. Spawning behavior and genetic parentage in the pirate perch (*Aphredoderus sayanus*), a fish with an enigmatic reproductive morphology. *Copeia* 2004:1-10.
- Fletcher, D. E., and S. D. Wilkins. 1999. Glue secretion and adhesion by larvae of sailfin shiner (*Pteronotropis hypselopterus*). *Copeia* 1999:274-280.
- Fletcher, D. E., S. D. Wilkins, J. V. McArthur, and G. K. Meffe. 2000. Influence of riparian alteration on canopy coverage and macrophyte abundance in southeastern USA blackwater streams. *Ecol. Engineer.* 15, Suppl. 1: S67-S78.
- Flotemersch, J. E., D. C. Jackson, and J. R. Jackson. 1997. Channel catfish movements in relation to river channel floodplain connections. *Proc. Annu. Conf. Southeast. Assoc. Fish Wildl. Agencies* 51:106-112.
- Fontenot, Q. C., and D. A. Rutherford. 1999. Observations on the reproductive ecology of pirate perch *Aphredoderus sayanus*. *J. Freshw. Ecol.* 14:545-550.
- Forney, J. L. 1957. Bait fish production in New York ponds. *N.Y. Fish Game J.* 4:51-194.
- Foster, N. R. 1974. Order Atheriniformes. Pages 115-151 in A. J. Lippson and R. L. Moran. Manual for identification of early developmental stages of fishes of the Potomac River estuary. Rep. PPSP-MP. Maryland Department of Natural Resources, Power Plant Siting Program.
- Fowler, H. W. 1923. Spawning habits of sunfishes, basses, etc. *Progr. Fish-Cult.* 2:226-228.
- Fox, M. G. 1994. Growth, density, and interspecific influences on pumpkinseed sunfish life histories. *Ecology* 75:1157-1171.
- Fox, M. G., and A. J. Crivelli. 1998. Body size and reproductive allocation in a multiple spawning centrarchid. *Can. J. Fish. Aquat. Sci.* 55:737-748.
- Freeman, B. J., and M. C. Freeman. 1985. Production of fishes in a subtropical blackwater ecosystem: the Okefenokee Swamp. *Limnol. Oceanogr.* 30:686-692.
- Freeman, B. J., and M. C. Freeman. 2001. Criteria for suitable spawning habitat for the robust redbreast *Moxostoma robustum*. Report to the U.S. Fish and Wildlife Service. University of Georgia, Athens.
- Freeman, H. W. 1958. Fish species of lower Three Runs creek on the Savannah River plant. Unpublished report, U.S. Atomic Energy Commission.
- Freeman, M. C. 1995. Movements by two small fishes in a large stream. *Copeia* 1995:361-367.
- Fuiman, L. A., J. V. Conner, B. F. Lathrop, G. L. Buynak, D. E. Snyder, and J. J. Loos. 1983. State of the art of identification for cyprinid fish larvae from eastern North America. *Trans. Am. Fish. Soc.* 112:319-332.
- Gale, W. F., and W. G. Deutsch. 1985. Fecundity and spawning behavior of captive tessellated darters—fractional spawners. *Trans. Am. Fish. Soc.* 114:220-229.
- Gale, W. F., and H. W. Mohr Jr. 1978. Larval drift in a large river with comparison of sampling methods. *Trans. Am. Fish. Soc.* 107:46-55.
- Gatz, A. J. 1979. Ecological morphology of freshwater stream fishes. *Tulane Stud. Zool. Bot.* 21(2):91-124.
- Gatz, A. J. Jr., and S. M. Adams. 1994. Patterns of movement of centrarchids in two warmwater streams in eastern Tennessee. *Ecol. Freshw. Fish* 3(1):35-48.
- Gaymon, H. L. 1983. Biological assessment of Horse Creek, Langley Pond and Savannah River, Aiken County, South Carolina. Tech. Rep. 016-83. South Carolina Department of Health and Environmental Control, Columbia.
- Geomatrix. 1993. Preliminary Quaternary and Neotectonic studies: Savannah River Site, South Carolina. Geomatrix Consultants, Inc., final report, Project no. 1988.
- Gerald, J. W. 1971. Sound production during courtship in six species of sunfish (Centrarchidae). *Evolution* 25:75-87.
- Germann, J. F., and C. D. Swanson. 1978. Food habits of chain pickerel in the Suwannee River, Georgia. *Ga. J. Sci.* 36:153-158.
- Gibbons, J. W., and D. H. Bennett. 1971. Abundance and local movement of largemouth bass (*Micropterus salmoides*) in a reservoir receiving heated effluent from a reactor. Pages 524-527 in D. J. Nelson, editor. Proceedings of the 35th National Symposium on Radioecology, U.S. Atomic Energy Commission, Symp. Ser. CONF-710501-Pr, NTIS, Springfield, Va.
- Gibbons, J. W., D. H. Bennett, G. W. Esch, and T. C. Hazen. 1978. Effects of thermal effluent on body condition of largemouth bass. *Nature* 274:470-471.
- Gibbons, J. W., J. T. Hook, and D. L. Forney. 1972. Winter responses of largemouth bass to heated effluent from a nuclear reactor. *Progr. Fish-Cult.* 34(2):88-90.
- Giese, L. A., W. M. Aust, C. C. Trettin, and R. K. Kolka. 2000. Spatial and temporal patterns of carbon storage and species richness in three South Carolina Coastal Plain riparian forests. *Ecol. Engineer.* 15:157-170.
- Gilbert, C. R. 1964. The American cyprinid fishes of the subgenus *Luxilus* (genus *Notropis*). *Bull. Fla. State Mus.* 8(2):95-194.
- Gilbert, C. R. 1987. Zoogeography of the freshwater fish fauna of southern Georgia and peninsular Florida. *Brimleyana* 13:25-54.
- Gilbert, C. R. 1989. Species profiles: life histories and environmental requirements of coastal fishes and invertebrates (Mid-Atlantic Bight). Atlantic and shortnose sturgeons. U.S. Fish. Wildl. Serv. Biol. Rep. 82 (11.122); U.S. Army Corps of Engineers TR EL-82-4.
- Gilbert, C. R., editor. 1992. Rare and endangered biota of Florida. Volume 2: Fishes. University Press of Florida, Gainesville.

- Gilbert, C. R., and R. M. Bailey. 1972. Systematics and zoogeography of the American cyprinid fish *Notropis (Opsopoeodus) emiliae*. Occas. Pap. Mus. Zool. Univ. Mich. 664.
- Gilbert, C. R., and D. P. Kelso. 1971. Fishes of the Tortuguero area, Caribbean Costa Rica. Bull. Fla. State Mus. Biol. Sci. 16:11-54.
- Gilbert, R. J., and J. E. Hightower. 1981. Assessment of tag losses and mortality of largemouth bass in an unfished reservoir. Project F-37-2. Georgia Cooperative Extension Fisheries Research Unit, School of Forestry Resources, University of Georgia, Athens.
- Gilbert, R. J., S. Larson, and A. Wentworth. 1986. The relative importance of the lower Savannah River as a striped bass spawning area. School of Forestry Resources, University of Georgia, Athens.
- Gladden, J. B., M. W. Lower, H. E. Mackey, W. L. Specht, and E. W. Wilde. 1985. Comprehensive cooling water study annual report. DP-1697. Savannah River Laboratory, E. I. Du Pont de Nemours and Co., Aiken, S.C.
- Goff, G. P. 1984. Brood care of longnose gar (*Lepisosteus osseus*) by smallmouth bass (*Micropterus dolomieu*). Copeia 1984:149-152.
- Gonzalez, R. J., and W. A. Dunson. 1989. Acclimation of sodium regulation to low pH and the role of calcium in the acid-tolerant sunfish *Enneacanthus obesus*. Physiol. Zool. 62:977-992.
- Gonzalez, R. J., L. Milligan, A. Pagnotta, and D. G. McDonald. 2001. Effect of air breathing on acid-base and ion regulation after exhaustive exercise and during low pH exposure in the bowfin, *Amia calva*. Physiol. Biochem. Zool. 74(4):502-509.
- Goodyear, C. P. 1967. Feeding habits of three species of gars, *Lepisosteus*, along the Mississippi Gulf Coast. Trans. Am. Fish. Soc. 96:297-300.
- Gorham, S. W., and D. E. McAllister. 1974. The shortnose sturgeon, *Acipenser brevirostrum*, in the Saint John River, New Brunswick, Canada, a rare and possibly endangered species. Syllogeus 5:18.
- Graham, J. H. 1993. Species diversity of fishes in naturally acidic lakes in New Jersey. Trans. Am. Fish. Soc. 122:1043-1057.
- Graham, J. H., and J. D. Felley. 1985. Genomic coadaptation and developmental stability within introgressed populations of *Enneacanthus gloriosus* and *E. obesus* (Pisces, Centrarchidae). Evolution 39:104-114.
- Graham, J. H., and R. W. Hastings. 1984. Distributional patterns of sunfishes on the New Jersey Coastal Plain. Environ. Biol. Fishes 10:137-148.
- Graham, K. 1999. A review of the biology and management of blue catfish. Am. Fish. Soc. Symp. 24:37-49.
- Grande, L. 1985. Recent and fossil clupeomorph fishes with materials for revision of the subgroups of clupoids. Bull. Am. Mus. Nat. Hist. 181:235-372.
- Greeley, J. R. 1930a. A contribution to the biology of the horned dace, *Semotilus atromaculatus*. Doctoral dissertation, Cornell University, Ithaca, N.Y.
- Greeley, J. R. 1930b. Fishes of the Lake Champlain watershed. Pages 44-87 in A biological survey of the Champlain watershed. Suppl. 19th Ann. Rep. N.Y. Conserv. Dept. 1929.
- Green, D. M., and R. C. Heidinger. 1994. Longevity record for largemouth bass. N. Am. J. Fish. Manage. 14:464-465.
- Green, T. D., and E. G. Maurakis. 2000. Comparison of larval myomere counts among species of *Nocomis* in Virginia (Actinopterygii: Cyprinidae). Va. J. Sci. 51:17-22.
- Greenfield, D. 1973. An evaluation of the advisability of the release of grass carp, *Ctenopharyngodon idella*, into the natural waters of the United States. Trans. Ill. State Acad. Sci. 66:48-53.
- Grier, H. J., D. P. Moody, and B. C. Cowell. 1990. Internal fertilization and sperm morphology in the brook silver-side, *Labidesthes sicculus* (Cope). Copeia 1990:221-226.
- Griffith, J. S. 1978. Effects of low temperature on the survival and behavior of threadfin shad, *Dorosoma petenense*. Trans. Am. Fish. Soc. 107:63-70.
- Grimm, W. W. 1937. The development of the fins of the goldfish (*Carassius auratus*). Doctoral dissertation, Ohio State University, Columbus.
- Griswold, B. L. 1963. Food and growth of spottail shiners and other forage fishes of Clear Lake, Iowa. Proc. Iowa Acad. Sci. 70:215-223.
- Gross, M. R. 1979. Cuckoldry in sunfishes (*Lepomis*: Centrarchidae). Can. J. Zool. 57:1507-1509.
- Gross, M. R. 1982. Sneakers, satellites and parentals: polymorphic mating strategies in North American sunfishes. Z. Tierpsychol. 60:1-26.
- Gross, M. R. 1984. Sunfish, salmon, and the evolution of alternative reproductive strategies and tactics in fish. Pages 55-75 in G. Potts and R. Wootton, editors. Fish reproduction: strategies and tactics. Academic Press, New York.
- Gross, M. R., and A. M. MacMillan. 1981. Predation and the evolution of colonial nesting in bluegill sunfish (*Lepomis macrochirus*). Behav. Ecol. Sociobiol. 8:163-174.
- Grossman, G. D., and R. E. Ratajczak Jr. 1998. Long-term patterns of microhabitat use by fish in a southern Appalachian stream from 1983 to 1992: effects of hydrological period, season and fish length. Ecol. Freshw. Fish 7:108-131.
- Grunwald, C., J. Stabile, J. R. Waldman, R. Gross, and

- I. Wirgin. 2002. Population genetics of shortnose sturgeon *Acipenser brevirostrum* based on mitochondrial DNA control region sequences. *Mol. Ecol.* 11:1885-1898.
- Grussing, M. D., D. R. DeVries, and R. A. Wright. 1999. Stock characteristics and habitat use of catfishes in regulated sections of 4 Alabama rivers. *Proc. Annu. Conf. Southeast. Assoc. Fish Wildl. Agencies* 53:15-34.
- Gu, B., C. L. Schelske, and M. V. Hoyer. 1996. Stable isotopes of carbon and nitrogen as indicators of diet and trophic structure of the fish community in a shallow hypereutrophic lake. *J. Fish Biol.* 49:1233-1243.
- Guest, W. C., R. W. Drenner, S. T. Threlkeld, F. D. Martin, and J. D. Smith. 1990. Effects of gizzard shad and threadfin shad on zooplankton and young-of-year white crappie production. *Trans. Am. Fish. Soc.* 119:529-536.
- Guillory, V. 1979a. Analysis of prey selection in chain pickerel. *Proc. Annu. Conf. Southeast. Assoc. Fish Wildl. Agencies* 33:507-517.
- Guillory, V. 1979b. Life history of the chain pickerel in a central Florida lake. *Fish Bull.* 8. Florida Game and Freshwater Fish Commission, Tallahassee.
- Guillory, V. 1979c. Species assemblages of fish in Lake Conway. *Fla. Sci.* 42(3):158-161.
- Gunning, G. E., and W. M. Lewis. 1955. The fish population of a spring-fed swamp in the Mississippi bottoms of southern Illinois. *Ecology* 36:552-558.
- Gutowski, M. J., and J. R. Stauffer. 1993. Selective predation by *Noturus insignis* (Richardson) (Teleostei, Ictaluridae) in the Delaware River. *Am. Midl. Nat.* 129(2):309-318.
- Guy, C. S., R. D. Schultz, and C. A. Cox. 2002a. Ecology and management of white bass. *N. Am. J. Fish. Manage.* 22:606-608.
- Guy, C. S., R. D. Schultz, and C. A. Cox. 2002b. Variation in gonad development, growth, and condition of white bass in Fall River Reservoir, Kansas. *N. Am. J. Fish. Manage.* 22:643-651.
- Guy, C. S., D. W. Willis, and J. J. Jackson. 1994. Biotelemetry of white crappies in a South Dakota glacial lake. *Trans. Am. Fish. Soc.* 123:63-70.
- Gwinner, H. R., H. J. Cathey, and F. J. Bulow. 1975. A study of two populations of introduced redeye bass, *Microp-terus coosae* Hubbs and Bailey. *J. Tenn. Acad. Sci.* 50:102-105.
- Haag, W. R., and M. L. Warren. 1997. Host fishes and reproductive biology of six freshwater mussel species from the Mobile Basin, USA. *J. N. Am. Benthol. Soc.* 16:576-585.
- Hale, R. S. 1999. Growth of white crappies in response to temperature and dissolved oxygen conditions in a Kentucky reservoir. *N. Am. J. Fish. Manage.* 19:591-598.
- Hales, L. S. Jr., and M. C. Belk. 1992. Validation of otolith annuli of bluegills in a southeastern thermal reservoir. *Trans. Am. Fish. Soc.* 121:823-830.
- Hall, G. E., and R. M. Jenkins. 1954. Notes on the age and growth of the pirate perch, *Aphredoderus sayanus*, in Oklahoma. *Copeia* 1954(1):69.
- Hall, W. J., T. I. J. Smith, and S. D. Lamprecht. 1991. Movements and habitats of shortnose sturgeon *Acipenser brevirostrum* in the Savannah River, Georgia. *Copeia* 1991:695-702.
- Halpin, P. M., and K. L. M. Martin. 1999. Aerial respiration in the salt marsh fish *Fundulus heteroclitus* (Fundulidae). *Copeia* 1999:743-748.
- Halverson, N. V., and 20 authors. 1997. SRS ecology. Environ. Inf. Doc. WSRC-TR-93-0223. Westinghouse Savannah River Co., Aiken, S.C.
- Halyk, L. C., and E. K. Balon. 1983. Structure and ecological production of the fish taxocene of a small floodplain system. *Can. J. Zool.* 61:2446-2464.
- Hammers, B. E., and L. E. Miranda. 1991. Comparison of methods for estimating age, growth, and related population characters of white crappies. *N. Am. J. Fish. Manage.* 11:492-498.
- Hammett, F. S., and D. W. Hammett. 1939. Proportional length growth of gar (*Lepidosteus platyrhincus* De Kay). *Growth* 3:197-209.
- Hankinson, T. L. 1908. A biological survey of Walnut Lake, Michigan. *Mich. State Board Geol. Surv. Rep.* 1907:157-288.
- Hansen, D. F. 1943. On nesting of the white crappie, *Pomoxis annularis*. *Copeia* 1943:259-260.
- Hansen, J. M., and S. U. Qadri. 1984. Feeding ecology of age 0 pumpkinseed (*Lepomis gibbosus*) and black crappie (*Pomoxis nigromaculatus*) in the Ottawa River. *Can. J. Zool.* 62:613-621.
- Harding, J. S., E. F. Benfield, P. V. Bolstad, G. S. Helfman, and E. B. D. Jones III. 1998. Stream biodiversity: the ghost of land use past. *Proc. Nat. Acad. Sci. USA* 95:14843-14847.
- Hardy, J. D. Jr. 1978. Development of fishes of the Mid-Atlantic Bight: an atlas of egg, larval and juvenile stages. Volume 3: Aphredoderidae through Rachycentridae. U.S. Fish Wildl. Serv. Biol. Serv. Prog. FWS/OBS-78/12.
- Harland, R. W. 1947. Observations on the breeding habits of yellow perch, *Perca flavescens* (Mitchill). *Copeia* 1947:199-200.
- Haro, A., W. Richkus, K. Whalen, A. Hoar, W. D. Busch, S. Lary, T. Brush, and D. Dixon. 2000. Population decline of the American eel: implications for research and management. *Fisheries* 25:7-16.
- Harrel, R. M., editor. 1997. Striped bass and other *Morone* culture. Elsevier, Amsterdam.

- Harrington, R. W. Jr. 1956. An experiment on the effects of contrasting daily photoperiods on gametogenesis and reproduction in the centrarchid fish, *Enneacanthus obesus* (Girard). *J. Exp. Zool.* 131:204-223.
- Harris, P. M., R. L. Mayden, H. S. Espinosa Perez, and F. Garcia de Leon. 2002. Phylogenetic relationships of *Moxostoma* and *Scartomyzon* (Catostomidae) based on mitochondrial cytochrome b sequence data. *J. Fish Biol.* 61:1433-1452.
- Hass, J. J., L. A. Jahn, and R. Hilsabeck. 2001. Diet of introduced flathead catfish (*Pylodictis olivaris*) in an Illinois reservoir. *J. Freshw. Ecol.* 16(4):551-555.
- Hazen, T. C., G. W. Esch, A. B. Glassman, and J. W. Gibbons. 1978. Relationship of season, thermal ecology and red-sore disease with various hematological parameters in *Micropterus salmoides*. *J. Fish Biol.* 12:491-498.
- Heard, R. W. 1975. Feeding habits of white catfish from a Georgia estuary. *Q. J. Fla. Acad. Sci.* 38:20-28.
- Hedrick, M. S., and D. R. Jones. 1999. Control of gill ventilation and air-breathing in the bowfin *Amia calva*. *J. Exp. Biol.* 202:87-94.
- Heidinger, R. C. 1976. Synopsis of biological data on the largemouth bass: *Micropterus salmoides* (Lacépède, 1802). Berman Associates.
- Heins, D. C., and F. G. Rabito Jr. 1986. Spawning performance in North American minnows: direct evidence of the occurrence of multiple clutches in the genus *Notropis*. *J. Fish Biol.* 28:343-357.
- Helfman, G. S., B. B. Collette, and D. E. Facey. 1997. Diversity of fishes. Blackwell Science, Malden, Mass.
- Helfrich, L. A., K. W. Nutt, and D. L. Weigmann. 1991. Habitat selection by spawning redbreast sunfish in Virginia streams. *Rivers* 2:138-147.
- Hellier, T. R. Jr. 1967. The fishes of the Santa Fe River system. *Bull. Fla. Mus. Biol. Sci.* 2(10):1-46.
- Henry, R. L. 1979. Prey size utilization in a community of southeastern fishes. *Bull. Ecol. Soc. Am.* 60:113.
- Hergenrader, G. L. 1980. Current distribution and potential for dispersal of white perch (*Morone americana*) in Nebraska and adjacent waters. *Am. Midl. Nat.* 103:404-406.
- Hesse, L. W. 1994. The status of Nebraska fishes in the Missouri River, 4. Flathead catfish *Pylodictis olivaris*, and blue catfish *Ictalurus furcatus* (Ictaluridae). *Trans. Nebr. Acad. Sci.* 21:89-98.
- Hettler, W. F., and A. J. Chester. 1990. Temporal distribution of ichthyoplankton near Beaufort Inlet, North Carolina. *Mar. Ecol. Prog. Ser.* 68:157-168.
- Hida, T. S., and D. A. Thomson. 1962. Introduction of threadfin shad to Hawaii. *Progr. Fish-Cult.* 24:159-163.
- Hildebrand, S. F. 1963. Family Clupeidae. Pages 257-454 in *Fishes of the western North Atlantic*. Sears Foundation for Marine Research, Mem. 1, pt. 3.
- Hildebrand, S. F., and W. C. Schroeder. 1928. Fishes of the Chesapeake Bay. U.S. Bur. Fish. Bull. 43:1-388.
- Hlohowsky, C. P., M. M. Coburn, and T. M. Cavender. 1989. Seven species of the herbivorous cyprinid genus, *Hybognathus* (Pisces: Cyprinidae). *Copeia* 1989:172-183.
- Hoda, S. M. S., and H. Tsukahari. 1971. Studies on the development and relative growth in carp, *Cyprinus carpio* (Linne.). *J. Fac. Agric. Kyushu Univ.* 16:387-509.
- Hodson, R. G. 1989. Hybrid striped bass, biology and life history. *South. Reg. Aquacult. Ctr. Pub.* 300.
- Hoese, H. D., and R. H. Moore. 1977. Fishes of the Gulf of Mexico, Texas, Louisiana, and adjacent waters. Texas A&M University Press, College Station.
- Hogan, D. C. 1977. Distribution and relative abundance of prey fish in a reservoir receiving a heated effluent. Master's thesis, University of Georgia, Athens.
- Holland, B. F. Jr., and G. F. Yelverton. 1973. Distribution and biological studies of anadromous fishes offshore of North Carolina. N.C. Dep. Natl. Econ. Res. Spec. Sci. Rep. 24:132.
- Holland, W. E., M. H. Smith, J. W. Gibbons, and D. H. Brown. 1974. Thermal tolerances of fish from a reservoir receiving heated effluent from a nuclear reactor. *Physiol. Zool.* 47:110-117.
- Hollis, E. H. 1948. The homing tendency of shad. *Science* 108:332-333.
- Holloway, A. D. 1954. Notes on the life history and management of the shortnose and longnose gars in Florida waters. *J. Wildl. Manage.* 18:438-449.
- Hoover, J. J. 1980. Feeding ecology of two sympatric species of *Notropis* (Pisces: Cyprinidae) from the Hillsborough River. *Fla. Sci.* 43:25.
- Hoover, J. J., S. G. George, and N. H. Douglas. 1998. The bluebarred pygmy sunfish (*Elassoma okatie*) in Georgia. *Southeast. Fish. Council. Proc.* 36:7-9.
- Hoover, J. J., and K. J. Killgore. 1999. Fish-habitat relationships in the streams of Fort Gordon, Georgia. Tech. Rep. EL-99-6. U.S. Army Corps of Engineers, Waterways Experiment Station, Vicksburg, Miss.
- Hoover, J. J., and K. J. Killgore. 2002. Small floodplain pools as habitat for fishes and amphibians: methods for evaluation. Tech. Note ERDC TN-EMRRP-EM-03. U.S. Army Corps of Engineers, Ecosystem Management and Restoration Research Program, Engineering Research and Development Center.
- Horwitz, R. J. 1978. Temporal variability patterns and the distributional patterns of stream fishes. *Ecol. Monogr.* 48:307-321.
- Houser, A., and J. E. Dunn. 1967. Estimating the size of

- threadfin shad population in Bull Shoals Reservoir from midwater trawl catches. *Trans. Am. Fish. Soc.* 96:176-184.
- Howells, R. G., and G. P. Garrett. 1992. Status of some exotic sport fishes in Texas waters. *Tex. J. Sci.* 44:317-324.
- Hubbs, C. 1951. Minimum temperature tolerances for fishes of the genera *Signalosa* and *Herichthys* in Texas. *Copeia* 1951:297.
- Hubbs, C. L. 1921. An ecological study of the life history of the freshwater atherine fish *Labidesthes sicculus*. *Ecology* 2:262-276.
- Hubbs, C. L., and G. P. Cooper. 1936. Minnows of Michigan. *Cranbrook Inst. Sci. Bull.* 8:1-95.
- Hubbs, C. L., and K. F. Lagler. 1958. Fishes of the Great Lakes region, with a new preface. University of Michigan Press, Ann Arbor.
- Hubbs, C. L., and E. C. Raney. 1951. Status, subspecies, and variations of *Notropis cummingsae*, a cyprinid fish of the southeastern United States. *Occas. Pap. Mus. Zool. Univ. Mich.* 535:1-25.
- Hubert, W. A., and D. T. O'Shea. 1992. Use of spatial resources by fishes in Grayrocks Reservoir, Wyoming. *J. Freshw. Ecol.* 7:219-225.
- Huckins, C. J. F. 1997. Functional linkages among morphology, feeding performance, diet, and competitive ability in molluscivorous sunfish. *Ecology* 78(8):2401-2414.
- Huckins, C. J. F., G. W. Osenberg, and G. G. Mittelbach. 2000. Species introductions and their ecological consequences: an example with congeneric sunfish. *Ecol. Appl.* 10(2):612-625.
- Hudson, R. G., and F. E. Hester. 1975. Movements of the redbreast sunfish in Little River, near Raleigh, North Carolina. *Proc. Annu. Conf. Southeast. Assoc. Game Fish Comm.* 29:325-329.
- Huff, J. A. 1975. Life history of the Gulf of Mexico sturgeon, *Acipenser oxyrinchus desotai*, in the Suwannee River, Florida. *Fla. Mar. Res. Pub.* 16:32.
- Hughes, G. M. 1976. Respiration of amphibious vertebrates. Academic Press, New York.
- Hughes, M. J., and D. M. Carlson. 1986. White catfish growth and life history in the Hudson River Estuary, New York. *J. Freshw. Ecol.* 3:407-418.
- Huish, M. T. 1954. Life history of the black crappie of Lake George, Florida. *Trans. Am. Fish. Soc.* 83:176-193.
- Huish, M. T. 1957. Food habits of three centrarchids in Lake George, Florida. *Proc. Annu. Conf. Southeast. Assoc. Game Fish Comm.* 11:293-302.
- Huizinga, H. W., G. W. Esch, and T. C. Hazen. 1979. Histopathology of red-sore disease (*Aeromonas hydrophilia*) in naturally and experimentally infected largemouth bass *Micropterus salmoides* (Lacépède). *J. Fish Dis.* 2:263-277.
- Humphries, E. T., and K. B. Cumming. 1973. An evaluation of striped bass fingerling culture. *Trans. Am. Fish. Soc.* 102:13-20.
- Hunt, B. P. 1953. Food relationships between Florida gar and other organisms in the Tamiami Canal, Dade County, Florida. *Trans. Am. Fish. Soc.* 82:13-33.
- Hunter, J. B. 1963. The reproductive behavior of the green sunfish, *Lepomis cyanellus*. *Zoologica* 48:13-24.
- Huntsman, G. R. 1967. Nuptial tubercles in carpsuckers (*Carpoides*). *Copeia* 1967:457-458.
- Hurst, T. P., E. T. Schultz, and D. O. Conover. 2000. Seasonal energy dynamics of young-of-the-year Hudson River striped bass. *Trans. Am. Fish. Soc.* 129:145-175.
- Irons, K. S., T. M. O'Hara, M. A. McClelland, and M. A. Pegg. 2002. White perch occurrence, spread, and hybridization in the middle Illinois River, upper Mississippi River system. *Trans. Ill. State Acad. Sci.* 95:207-214.
- Isaac, J. Jr., T. M. Kimmel, R. W. Bagley, V. H. Staats, and A. Barkoh. 1998. Spawning behavior of Florida largemouth bass in an indoor raceway. *Progr. Fish-Cult.* 60:59-62.
- Jackson, D. C. 1995. Distribution and stock structure of blue catfish and channel catfish in macrohabitats along riverine sections of the Tennessee-Tombigbee Waterway. *N. Am. J. Fish. Manage.* 15:845-853.
- Jacobson, P. M., D. A. Dixon, W. C. Leggett, B. C. Marcy Jr., and R. R. Massengill, editors. 2004. The Connecticut River Ecological Study (1965-1973) revisited: ecology of the Lower Connecticut River, 1973-2003. *Am. Fish. Soc. Monogr.* 9.
- Jenkins, R. E., and N. M. Burkhead. 1993. Freshwater fishes of Virginia. American Fisheries Society, Bethesda, Md.
- Jenkins, R. E., L. A. Reville, and T. Zorach. 1975. Records of the blackbanded sunfish, *Enneacanthus chaetodon*, and comments on the southeastern Virginia freshwater ichthyofauna. *Va. J. Sci.* 26(3):128-134.
- Jennings, M. J., J. E. Claussen, and D. P. Philipp. 1997. Effect of population size structure on reproductive investment of male bluegill. *N. Am. J. Fish. Manage.* 17:516-524.
- Jessop, B. M. 1987. Migrating eels in Nova Scotia. *Trans. Am. Fish. Soc.* 116:161-170.
- Johnson, B. L., and D. B. Noltie. 1996. Migratory dynamics of stream-spawning longnose gar (*Lepisosteus osseus*). *Ecol. Freshw. Fish* 5:97-107.
- Johnson, B. L., and D. B. Noltie. 1997. Demography, growth, and reproductive allocation in stream-spawning longnose gar. *Trans. Am. Fish. Soc.* 126:438-466.
- Johnson, J. H., and D. S. Dropkin. 1995. Diel feeding chro-

- nology of six fish species in the Juniata River, Pennsylvania. *J. Freshw. Ecol.* 10(1):11-18.
- Johnson, J. H., and E. Z. Johnson. 1984. Comparative diets of subyearling redbreast sunfish and subyearling northern redbelly dace in an Adirondack Lake. *J. Freshw. Ecol.* 2(6):587-591.
- Johnson, T. B., and D. O. Evans. 1990. Size-dependent winter mortality of young-of-the-year white perch: climate warming and invasion of the Laurentian Great Lakes. *Trans. Am. Fish. Soc.* 119:301-313.
- Johnston, C. E. 1994. The benefits to some minnows of spawning in the nests of other species. *Environ. Biol. Fishes* 40:213-218.
- Johnston, C. E., and W. S. Birkhead. 1988. Spawning in the bandfin shiner, *Notropis zonistius* (Pisces: Cyprinidae). *J. Ala. Acad. Sci.* 59:30-33.
- Johnston, C. E., and K. J. Kleiner. 1994. Reproductive behavior of the rainbow shiner (*Notropis chrosomus*) and the rough shiner (*Notropis baileyi*), nest associates of the bluehead chub (*Nocomis leptocephalus*) (Pisces: Cyprinidae) in the Alabama River drainage. *J. Ala. Acad. Sci.* 65:230-240.
- Johnston, C. E., and L. M. Page. 1992. The evolution of complex reproductive strategies in North American minnows (Cyprinidae). Pages 600-621 in R. L. Mayden, editor. *Systematics, historical ecology, and North American freshwater fishes*. Stanford University Press, Stanford, Calif.
- Jones, E. B. D. III, G. S. Helfman, J. O. Harper, and P. V. Bolstad. 1999. Effects of riparian forest removal on fish assemblages in southern Appalachian streams. *Conserv. Biol.* 13:1454-1465.
- Jones, P. W., F. D. Martin, and J. D. Hardy Jr. 1978. Development of fishes of the Mid-Atlantic Bight: an atlas of egg, larval and juvenile stages. Volume 1: Acipenseridae through Ictaluridae. FWS/OBS-78/12. U.S. Department of the Interior, Fish and Wildlife Service, Washington, D.C.
- Jones, T. A. 2001. Seasonal and diel movement of largemouth bass in a South Carolina stream. Master's thesis, Clemson University, Clemson, S.C.
- Jones, W. J., and J. M. Quattro. 1999. Phylogenetic affinities of pygmy sunfishes (*Elassoma*) inferred from mitochondrial DNA sequences. *Copeia* 1999:470-474.
- Jordan, D. S. 1878. A catalogue of the fishes of Illinois. III. State Lab. Nat. Hist. Bull. 1(2):37-70.
- Jordan, D. S. 1923. A classification of fishes. Stanford Univ. Pub. 3(2):79-243.
- Jordan, D. S., and B. W. Evermann. 1896-1900. The fishes of North and Middle America. Bull. U.S. Natl. Mus. 47:1-3313. Pt. 1, pp. 1-1230, 1896; pt. 2, pp. 1231-2183, 1898; pt. 3, pp. 2183a-3136, 1899; pt. 4, pp. 3137-3313, 1900.
- Jordan, F., and D. A. Arrington. 2001. Weak trophic interactions between large predatory fishes and herpetofauna in the channelized Kissimmee River, Florida, USA. *Wetlands* 21:155-159.
- Karr, J. R., K. D. Fausch, P. L. Angermeier, P. R. Yant, and I. J. Schlosser. 1986. Assessing biological integrity in running waters: a method and its rationale. Ill. Nat. Hist. Surv. Spec. Pub. 5.
- Katula, R. S. 1987. Spawning of the pirate perch recollected. *Am. Currents* (June-September):19-20.
- Katula, R. S. 1992. The spawning mode of the pirate perch. *Trop. Fish Hobbyist* (August):156-159.
- Katula, R. S., and L. M. Page. 1998. Nest association between a large predator, the bowfin (*Amia calva*), and its prey, the golden shiner (*Notemigonus crysoleucas*). *Copeia* 1:220-221.
- Kaya, C. M. 1973. Effects of temperature and photoperiod on seasonal regression of gonads of green sunfish, *Lepomis cyanellus*. *Copeia* 1973(2):369-373.
- Kaya, C. M., and A. D. Hasler. 1972. Photoperiod and temperature effects on the gonads of green sunfish, *Lepomis cyanellus* (Rafinesque), during the quiescent, winter phase of its annual sexual cycle. *Trans. Am. Fish. Soc.* 2:270-275.
- Keast, A. 1978. Feeding interrelations between age-groups of pumpkinseed (*Lepomis gibbosus*) and comparisons with bluegill (*L. macrochirus*). *J. Fish. Res. Board Can.* 35:12-27.
- Keast, A. 1985a. Implications of chemosensory feeding in catfishes: an analysis of the diets of *Ictalurus nebulosus* and *I. natalis*. *Can. J. Zool.* 63:590-602.
- Keast, A. 1985b. The piscivore feeding guild of fishes in small freshwater ecosystems. *Environ. Biol. Fishes* 12:119-129.
- Keast, A., J. Harker, and D. Turnbull. 1978. Nearshore fish habitat utilization and species associations in Lake Opinicon (Ontario, Canada). *Environ. Biol. Fishes* 3(2):173-184.
- Kelly, M. S. 1989. Distribution and biomass of aquatic macrophytes in an abandoned nuclear cooling reservoir. *Aquat. Bot.* 35:133-152.
- Kennedy, P. K., M. L. Kennedy, and M. H. Smith. 1985. Microgeographic genetic organization of populations of largemouth bass and two other species in a reservoir. *Copeia* 1985:118-125.
- Kerby, J. H., and E. B. Joseph. 1979. Growth and survival of striped bass and striped bass x white bass hybrids: a review of methods, advances and problems. *Proc. Annu. Conf. Southeast. Assoc. Fish Wildl. Agencies* 32(1978):715-726.

- Kerby, J. H., and R. M. Harrell. 1990. Hybridization, genetic manipulation, and gene pool conservation of striped bass. Pages 159–190 in R. M. Harrell, J. H. Kerby, and R. V. Minton, editors. Culture and propagation of striped bass and its hybrids. American Fisheries Society, Southern Division, Striped Bass committee, Bethesda, Md.
- Khan, M. H. 1929. Early stages in the development of goldfish (*Carassius auratus*). J. Bombay Nat. Hist. Soc. 33:614–617.
- Kilgo, J. C., and J. I. Blake, editors. In press. Ecology and management of a forested landscape: fifty years of natural resource stewardship on the Savannah River Site. Island Press, Covelo, Calif.
- Killgore, K. J., and J. A. Baker. 1996. Patterns of larval fish abundance in a bottomland hardwood wetland. Wetlands 16:288–295.
- Killgore, K. J., R. P. Morgan II, and N. B. Rybicki. 1989. Distribution and abundance of fishes associated with submersed aquatic plants in the Potomac River. N. Am. J. Fish. Manage. 9(1):101–111.
- Kindler, P. M., J. M. Bahr, M. R. Gross, and D. P. Philipp. 1991a. Hormonal regulation of parental care behavior in nesting male bluegill: do the effects of bromocriptine suggest a role for prolactin? Physiol. Zool. 64:310–322.
- Kindler, P. M., J. M. Bahr, and D. P. Philipp. 1991b. The effects of exogenous 11-ketotestosterone, testosterone, and cyproterone acetate on prespawning and parental care behaviors of male bluegill. Hormones Behav. 25:410–423.
- King, W., and J. Parsons. 1951. Two black bass new to Tennessee. J. Tenn. Acad. Sci. 26:113–114.
- Kirkman, L. K. 1992. Cyclical vegetation dynamics in Carolina bays wetlands. Doctoral dissertation, University of Georgia, Athens.
- Kittl, B. 1999. Mosquitofish imperil frogs. Discover 20(8).
- Klaassen, H. E., and K. L. Morgan. 1974. Age and growth of longnose gar in Tuttle Creek Reservoir, Kansas. Trans. Am. Fish. Soc. 103:402–405.
- Klarberg, D. P., and A. Benson. 1973. The food habits of the brown bullhead (*Ictalurus nebulosus*) in mine acid polluted waters. Va. J. Sci. 24(3):120.
- Kline, J. L., and B. M. Wood. 1996. Food habits and diet selectivity of the brown bullhead. J. Freshw. Ecol. 11:145–151.
- Kohler, C. C. 2000. A white paper on the status and needs of hybrid striped bass aquaculture in the north central region. North Central Regional Aquaculture Center. (<http://ag.ansc.purdue.edu/aquanic/ncrac/wpapers>).
- Kolka, R. K., J. H. Singer, C. R. Coppock, W. P. Casey, and C. C. Trettin. 2000. Influence of restoration and succession on bottomland hardwood hydrology. Ecol. Engineer. 15, Suppl. 1:S131–S140.
- Kolka, R. K., C. C. Trettin, E. A. Nelson, C. D. Barton, and D. E. Fletcher. 2002. Application of the EPA Wetland Research Program approach to a floodplain wetland restoration assessment. J. Environ. Monitor. Restor. 1(1): 37–51.
- Konradt, A. G. 1968. Methods of breeding the grass carp *Ctenopharyngodon idella* and the silver carp, *Hypophthalmichthys molitrix*. FAO Fish Rep. 4:195–204.
- Koski, R. T. 1978. Age, growth, and maturity of the hogchoker, *Trinectes maculatus*, in the Hudson River, New York. Trans. Am. Fish. Soc. 107:449–454.
- Kramer, R. H., and L. L. Smith Jr. 1960. Utilization of nests of largemouth bass, *Micropterus salmoides*, by golden shiners, *Notemigonus crysoleucas*. Copeia 1960:73–74.
- Kruse, C. G., C. S. Guy, and D. W. Willis. 1993. Comparison of otolith and scale age characteristics for black crappies collected from South Dakota waters. N. Am. J. Fish. Manage. 13:856–858.
- Kuehne, R. A., and R. W. Barbour. 1983. The American darters. University Press of Kentucky, Lexington.
- Kutkuhn, J. H. 1958. Utilization of plankton by juvenile gizzard shad in a shallow prairie lake. Trans. Am. Fish. Soc. 87:80–103.
- Kwak, T. J. 1988. Lateral movement and use of floodplain habitat by fishes of the Kankakee River, Illinois. Am. Midl. Nat. 120(2):241–249.
- Lachner, E. A. 1952. Studies of the biology of the cyprinid fishes of the chub genus *Nocomis* of northeastern United States. Am. Midl. Nat. 48:433–466.
- Lachner, E. A., and M. L. Wiley. 1971. Populations of the polytypic species *Nocomis leptocephalus* (Girard) with a description of a new subspecies. Smithsonian. Contrib. Zool. 92:35.
- Laerm, J., and B. J. Freeman. 1986. Fishes of the Okefenokee Swamp. University of Georgia Press, Athens.
- Lagler, K. F., and V. C. Applegate. 1942. Further studies of the food of the bowfin (*Amia calva*) in southern Michigan, with notes on the inadvisability of using trapped fish in food analysis. Copeia 1942:190–191.
- Lagler, K. F., and F. V. Hubbs. 1940. Food of the longnosed gar (*Lepisosteus osseus oxyurus*) and the bowfin (*Amia calva*) in southern Michigan. Copeia 1940:239–241.
- Lagler, K. F., and H. Van Meter. 1951. Abundance and growth of gizzard shad, *Dorosoma cepedianum* (Lesueur), in a small Illinois lake. J. Wildl. Manage. 15:357–360.
- Laird, C. A., and L. M. Page. 1996. Non-native fishes inhabiting the streams and lakes of Illinois. Ill. Nat. Hist. Surv. Bull. 35 (art. 1).
- Lakly, M. B., and J. V. McArthur. 2000. Macroinvertebrate

- recovery of a post-thermal stream: habitat structure and biotic function. *Ecol. Engineer.* 15, Suppl. 1: S87-S100.
- Lambou, V. W. 1959. Fish populations of backwater lakes in Louisiana. *Trans. Am. Fish. Soc.* 88:7-15.
- Larimore, R. W. 1957. Ecological life history of the warmouth (Centrarchidae). *Ill. Nat. Hist. Surv. Bull.* 27(1):1-83.
- Larimore, W. R., and P. W. Smith. 1963. The fishes of Champaign County, Illinois, as affected by 60 years of stream changes. *Ill. Nat. Hist. Surv. Bull.* 28:299-382.
- Larkin, P. A., J. G. Terpenning, and P. R. Parker. 1957. Size as a determinant of growth rate in rainbow trout, *Salmo gairdneri*. *Trans. Am. Fish. Soc.* 83:84-96.
- Larson, S. C., B. S. Saul, and S. Schleiger. 1991. Exploitation and survival of black crappies in three Georgia reservoirs. *N. Am. J. Fish. Manage.* 11:604-613.
- Lauder, G. V. 1983. Functional and morphological bases of trophic specialization in sunfishes (Teleostei, Centrarchidae). *J. Morphol.* 178:1-21.
- Layher, W. G., and R. J. Boles. 1980. Food habits of the flathead catfish, *Pylodictis olivaris* (Rafinesque), in relation to length and season in a large Kansas reservoir. *Trans. Kans. Acad. Sci.* 83:200-214.
- Layman, S. R. 1993. Life history of the Savannah darter, *Etheostoma fricksium*, in the Savannah River drainage, South Carolina. *Copeia* 1993:959-968.
- Layzer, J. B., and R. J. Reed. 1978. Food, age and growth of the tessellated darter, *Etheostoma olmstedi*, in Massachusetts. *Am. Midl. Nat.* 100:459-462.
- Lazzaro, X., R. W. Drenner, R. A. Stein, and J. D. Smith. 1992. Planktivores and plankton dynamics: effects of fish biomass and planktivore type. *Can. J. Fish. Aquat. Sci.* 49:1466-1473.
- Lee, D. S., C. R. Gilbert, C. H. Hocutt, R. E. Jenkins, D. E. McAllister, and J. R. Stauffer Jr. 1980. Atlas of North American freshwater fishes. *N.C. Biol. Surv. Pub.* 1980-12.
- Leggett, W. C. 1972. Weight loss in American shad (*Alosa sapidissima*) during the freshwater migration. *Trans. Am. Fish. Soc.* 101:549-552.
- Leggett, W. C. 1976. The American shad (*Alosa sapidissima*), with special reference to migration and population dynamics in the Connecticut River. Pages 169-225 in D. Merriman and L. M. Thorpe, editors. *The Connecticut River Ecological Study: the impact of a nuclear power plant.* *Am. Fish. Soc. Monogr.* 1.
- Leggett, W. C. 1977. Ocean migration rates of American shad (*Alosa sapidissima*). *J. Fish. Res. Board Can.* 34:1422-1426.
- Leggett, W. C., and J. E. Carscadden. 1978. Latitudinal variation in reproductive characteristics of American shad (*Alosa sapidissima*): evidence for population specific life history strategies in fish. *J. Fish. Res. Board Can.* 35:1469-1478.
- Leggett, W. C., T. F. Savoy, and C. A. Tomich. 2004. The impact of enhancement initiatives on the structure and dynamics of the Connecticut River population of American Shad (*Alosa sapidissima*). In Jacobson, P. M., D. A. Dixon, W. C. Leggett, B. C. Marcy Jr., and R. R. Massengill, editors. *The Connecticut River Ecological Study (1965-1973) revisited: ecology of the Lower Connecticut River, 1973-2003.* *Am. Fish. Soc. Monogr.* 9.
- Leggett, W. C., and R. R. Whitney. 1972. Water temperature and the migration of American shad. *Fish. Bull.* 70:659-670.
- Lehtinen, R. M., N. D. Mundahl, and J. C. Madejczyk. 1997. Autumn use of woody snags by fishes in backwater and channel border habitats of a large river. *Environ. Biol. Fishes* 49:7-19.
- Leim, A. H., and W. B. Scott. 1966. Fishes of the Atlantic coast of Canada. *Fish. Res. Board Can. Bull.* 155:485.
- Leitman, H. M., M. R. Darst, and J. J. Nordhaus. 1991. Fishes in the forested flood plain of the Ochlockonee River, Florida, during flood and drought conditions. *U.S. Geol. Surv. Water-Res. Invest. Rep.* 90-4202.
- Lemly, A. D. 1985. Suppression of native fish populations by green sunfish in first-order streams of Piedmont North Carolina. *Trans. Am. Fish. Soc.* 114:705-712.
- Lenat, D. R., and J. K. Crawford. 1994. Effects of land use on water quality and aquatic biota of three North Carolina Piedmont streams. *Hydrobiologia* 294:185-199.
- Lesko, L. T., S. B. Smith, and M. A. Blouin. 1996. The effect of contaminated sediments on fecundity of the brown bullhead in three Lake Erie tributaries. *J. Great Lakes Res.* 22:830-837.
- Leslie, J. K., and C. A. Timmins. 2002. Description of age 0 juvenile pugnose minnow *Opsopoeodus emiliae* (Hay) and pugnose shiner *Notropis anogenus* (Forbes) in Ontario. *Can. Tech. Rep. Fish. Aquat. Sci.* 2397:14.
- Lewis, W. M. 1952. Analysis of the gizzard shad population of Crab Orchard Lake, Illinois. *Ill. Acad. Sci. Trans.* 46:231-235.
- Lewis, W. M., and D. Elder. 1956. The fish population of the headwaters of a spotted bass stream in southern Illinois. *Trans. Am. Fish. Soc.* 82:193-203.
- Lide, R. F. 1991. Hydrology of a Carolina bay located on the upper Coastal Plain, western South Carolina. Master's thesis, University of Georgia, Athens.
- Limburg, K. E., and R. M. Ross. 1995. Growth and mortality rates of larval American shad, *Alosa sapidissima*, in different salinities. *Estuaries* 18:335-340.
- Limburg, K. E., and R. E. Schmidt. 1990. Patterns of fish spawning in Hudson River tributaries: response to an urban gradient. *Ecology* 71:1238-1245.

- Lindsey, C. C., T. G. Northcote, and G. F. Hartman. 1959. Homing of rainbow trout to inlet and outlet spawning streams at Loon Lake, British Columbia. *J. Fish. Res. Board Can.* 20:1001-1030.
- Lippson, A. J., and R. L. Moran. 1974. Manual for identification of early developmental stages of fishes of the Potomac River estuary. Rep. PPSP-MP-13. Maryland Department of Natural Resources, Power Plant Siting Program.
- Lobb, M. D. III, and D. J. Orth. 1991. Habitat use by an assemblage of fish in a large warmwater stream. *Trans. Am. Fish. Soc.* 120:65-78.
- Loesch, J. G., and W. A. Lund Jr. 1977. A contribution to the life history of the blueback herring, *Alosa aestivalis*. *Trans. Am. Fish. Soc.* 106:583-589.
- Loftus, W. F., and J. A. Kushlan. 1987. Freshwater fishes of southern Florida. *Bull. Fla. State Mus. Biol. Sci.* 31:147-344.
- Loftus, W. F., J. A. Kushlan, and S. A. Voorhees. 1984. Status of the mountain mullet in southern Florida. *Fla. Sci.* 47:256-263.
- Looney, G. L. 1998. Hormone induced ovulation of robust redbreast (*Moxostoma robustum*). Presented at the 1998 Southern Division of the American Fisheries Society Midyear Meeting, Lexington, Ky. (<http://www.sdafs.org/meetings/98sdafs/aquac/looney.htm>).
- Loos, J. J., and L. A. Fuiman. 1978. Subordinate taxa of the genus *Notropis*: a preliminary comparative survey of their developmental traits. Proceedings of the Freshwater Larval Fish Workshop, I. Southeastern Electric Exchange.
- Loos, J. J., L. A. Fuiman, N. R. Foster, and E. K. Jan-kowski. 1979. Notes on the early life histories of cyprinid fishes of the upper Potomac River. Pages 93-139 in R. Wallus and C. W. Voigtlander, editors. Proceedings of a Workshop on Freshwater Larval Fishes. Tennessee Valley Authority, Norris, Tenn.
- Lopinot, A. 1972. White amur, *Ctenopharyngodon idella*. Memo 37:2. Illinois Department of Conservation, Division of Fisheries Management.
- Lovell, R. G., and M. J. Maccina. 2002. Population assessment and minimum length limit evaluations for white bass in four Alabama reservoirs. *N. Am. J. Fish. Manage.* 22:609-619.
- Ludwig, A., L. Debus, D. Lieckfeldt, I. Wirgin, N. Bennecke, I. Jenneckens, P. Williot, J. R. Waldman, and C. Pitra. 2002. When the American sea sturgeon swam east. *Nature* 419:447-448.
- Lukas, J. A., and D. J. Orth. 1993. Reproductive ecology of redbreast sunfish *Lepomis auritus* in a Virginia stream. *J. Freshw. Ecol.* 8(3):235-244.
- Lydeard, C., M. C. Wooten, and M. H. Smith. 1991. Occurrence of *Gambusia affinis* in the Savannah and Chatahoochee drainages: previously undescribed geographic contacts between *G. affinis* and *G. holbrooki*. *Copeia* 1991:1111-1116.
- Lyons, J. 1989. Changes in the abundance of small littoral-zone fishes in Lake Mendota, Wisconsin. *Can. J. Zool.* 67:2910-2916.
- Lyons, J., and S. Navarro-Perez. 1990. Fishes of the Sierra de Manantlan, west-central Mexico. *Southwest. Nat.* 35:32-46.
- Macirolek, J. A. 1984. Exotic fishes in Hawaii and other islands of Oceania. Pages 131-161 in W. R. Courtenay Jr. and J. R. Stauffer Jr., editors. Distribution, biology, and management of exotic fishes. Johns Hopkins University Press, Baltimore, Md.
- Mackiewicz, M. D., D. E. Fletcher, S. D. Wilkins, J. A. DeWoody, and J. C. Avise. 2002. A genetic assessment of parentage in a natural population of dollar sunfish (*Lepomis marginatus*) based on microsatellite markers. *Mol. Ecol.* 11:1877-1883.
- Madenjian, C. P., R. L. Knight, M. T. Bur, and J. L. Forney. 2000. Reduction in recruitment of white bass in Lake Erie after invasion of white perch. *Trans. Am. Fish. Soc.* 129:1340-1353.
- Malloy, R., and F. D. Martin. 1982. Comparative development of redbreast pickerel (*Esox americanus americanus*) and the eastern mudminnow (*Umbra pygmaea*). Pages 70-72 in C. F. Bryan, J. V. Conner, and F. M. Truesdale, editors. The Fifth Annual Larval Fish Conference. Louisiana Cooperative Fisheries Research Unit.
- Manooch, C. S. III. 1984. Fisherman's guide—fishes of the southeastern United States. North Carolina State Museum of Natural History, Raleigh.
- Mansfield, P. J. 1984. Reproduction by Lake Michigan fishes in a tributary stream. *Trans. Am. Fish. Soc.* 113:231-237.
- Mansueti, A. J. 1963. Some changes in morphology during ontogeny in the pirateperch, *Aphredoderus s. sayanus*. *Copeia* 1963:546-547.
- Mansueti, A. J., and J. D. Hardy. 1967. Development of fishes of the Chesapeake Bay region: an atlas of egg, larval, and juvenile stages. Natural Resources Institute, University of Maryland, Baltimore.
- Mansueti, R. J. 1961. Movements, reproduction, and mortality of the white perch, *Roccus americanus*, in the Patuxent estuary. *Chesapeake Sci.* 2(3-4):142-205.
- Mansueti, R. J. 1962. Eggs, larvae, and young of the hickory shad, *Alosa mediocris*, with comments on its ecology in the estuary. *Chesapeake Sci.* 3:173-205.
- Mansueti, R. J. 1964. Eggs, larvae, and young of the white perch, *Roccus americanus*, with comments on its ecology in the estuary. *Chesapeake Sci.* 5(1-2):3-45.
- Mansueti, R., and H. J. Elser. 1953. Ecology, age and growth

- of the mud sunfish, *Acantharchus pomotis*, in Maryland. *Copeia* 1953:117-118.
- Mansueti, R., and R. Pauli. 1956. Age and growth of the northern hogchoker, *Trinectes maculatus maculatus*, in the Patuxent River, Maryland. *Copeia* 1956:60-62.
- Marcy, B. C. Jr. 1969. Age determinations from scales of *Alosa pseudoharengus* (Wilson) and *Alosa aestivalis* (Mitchell) in Connecticut waters. *Trans. Amer. Fish. Soc.* 98(4):622-630.
- Marcy, B. C. Jr. 1972. Spawning of the American shad, *Alosa sapidissima*, in the lower Connecticut River. *Chesapeake Sci.* 13:116-119.
- Marcy, B. C. Jr. 1976. Fishes of the lower Connecticut River and the effects of the Connecticut Yankee Plant. Pages 61-113 in D. Merriman and L. M. Thorpe, editors. *The Connecticut River Ecological Study: the impact of a nuclear power plant*. *Am. Fish. Soc. Monogr.* 1.
- Marcy, B. C. Jr., J. A. Bower, J. B. Gladden, H. M. Hickey, M. P. Jones, H. E. Mackey, and J. J. Mayer. 1994. Remediation of a large contaminated reactor cooling reservoir: resolving an environmental/regulatory paradox. *Proc. Annu. Meet. Natl. Assoc. Environ. Professionals (New Orleans, La.)* 19:665-676.
- Marcy, B. C. Jr., and S. K. O'Brien-White. 1995. Fishes of the Edisto River basin, South Carolina. Rep. 6. South Carolina Department of Natural Resources, Columbia.
- Marcy, B. C. Jr., and F. P. Richards. 1974. Age and growth of the white perch *Morone americana* in the lower Connecticut River. *Trans. Am. Fish. Soc.* 103:111-120.
- Markham, J. L., D. L. Johnson, and R. W. Petering. 1991. White crappie summer movements and habitat use in Delaware Reservoir, Ohio. *N. Am. J. Fish. Manage.* 11:504-512.
- Marshall, N. B. 1947. Studies on the life history and ecology of *Notropis chalybaeus* (Cope). *J. Fla. Acad. Sci.* 9:163-188.
- Martin, C. R. 1980. Movements, growth, and numbers of largemouth bass (*Micropterus salmoides*) in an unfished reservoir receiving a heated effluent. Master's thesis, University of Georgia, Athens.
- Martin, F. D. 1968. Some factors influencing penetration into rivers by fishes of the genus *Cyprinodon*. Doctoral dissertation, University of Texas, Austin.
- Martin, F. D., and C. Hubbs. 1973. Observations on the development of pirate perch, *Aphredoderus sayanus* (Pisces: Aphredoderidae), with comments on yolk circulation patterns as a possible taxonomic tool. *Copeia* 1973:377-379.
- Martin, F. D., and D. A. Wright. 1987. Nutritional state analysis and its use in predicting striped bass recruitment: laboratory calibration. *Am. Fish. Soc. Symp.* 2:109-114.
- Martin, F. D., D. A. Wright, J. C. Means, and E. M. Setzler-Hamilton. 1985. Importance of food supply and nutritional state of larval striped bass in the Potomac River estuary. *Trans. Am. Fish. Soc.* 114:137-145.
- Massman, W. H. 1954. Marine fishes in fresh and brackish waters of Virginia rivers. *Ecology* 35:75-78.
- Mathur, D. 1972. Seasonal food habits of the adult white crappie, *Pomoxis annularis* (Rafinesque), in Conowingo Reservoir. *Am. Midl. Nat.* 87:236-241.
- Mathur, D. 1973a. Food habits and feeding chronology of the blackbanded darter, *Percina nigrofasciata* (Agassiz), in Halawakee Creek, Alabama. *Trans. Am. Fish. Soc.* 102:48-55.
- Mathur, D. 1973b. Some aspects of the life history of the blackbanded darter, *Percina nigrofasciata* (Agassiz), in Halawakee Creek, Alabama. *Am. Midl. Nat.* 89:381-393.
- Mathur, D., P. L. McCreight, and G. A. Nardacci. 1979. Variations in fecundity of white crappie in Conowingo Pond, Pennsylvania. *Trans. Am. Fish. Soc.* 108:548-554.
- Mathur, D., and T. W. Robbins. 1971. Food habits and feeding chronology of young white crappie, *Pomoxis annularis* (Rafinesque), in Conowingo Reservoir. *Trans. Am. Fish. Soc.* 100:307-311.
- Matthews, D. R., and W. J. Gelwick. 2002. Resource use by large catfishes in a reservoir: is there evidence for interactive segregation and innate differences? *J. Fish Biol.* 60:739-750.
- Maurakis, E. G., W. S. Woolcott, and J. T. Magee. 1990. Pebble-nests of four *Semotilus* species. *Proc. Southeast. Fish. Council.* 22:7-13.
- Maurakis, E. G., W. S. Woolcott, and E. S. Perry. 1997. Description of agonistic behaviors in two species of *Nocomis*. *Va. J. Sci.* 48:195-202.
- Maurakis, E. G., W. S. Woolcott, and M. H. Sabaj. 1991. Reproductive-behavioral phylogenetics of *Nocomis* species-groups. *Am. Midl. Nat.* 126:103-110.
- Maurakis, E. G., W. S. Woolcott, and M. H. Sabaj. 1992. Water currents in spawning areas of pebble nests of *Nocomis leptocephalus* (Pisces: Cyprinidae). *Proc. Southeast. Fish. Council.* 25:1-2.
- Mayden, R. L. 1985. Biogeography of Ouachita Highland fishes. *Southwest. Nat.* 30:195-211.
- Mayden, R. L. 1989. Phylogenetic studies of North American minnows, with emphasis on the genus *Cyprinella* (Teleostei: Cypriniformes). *Misc. Pub. Mus. Nat. Hist. Univ. Kans.* 80:189.
- Mayer, J. J., and L. D. Wike. 1997. SRS urban wildlife. *Environ. Inf. Doc. WSRC-TR-97-0093*. Westinghouse Savannah River Co., Aiken, S.C.
- McAuliffe, J. R., and D. H. Bennett. 1981. Observations on the spawning habits of the yellowfin shiner, *Notropis lutipinnis*. *J. Elisha Mitchell Sci. Soc.* 97:200-203.
- McCann, J. A. 1959. Life history studies of the spottail

- shiner of Clear Lake, Iowa, with particular reference to some sampling problems. *Trans. Am. Fish. Soc.* 88:336-343.
- McCord, J. W. 1998. Investigation of fisheries parameters for anadromous fishes in South Carolina. Completion report ASFC-53 to National Marine Fisheries Service.
- McCormack, B. 1967. Aerial respiration in the Florida spotted gar. *Q. J. Fla. Acad. Sci.* 30:68-72.
- McCort, W. D., K. K. Patterson, S. W. Oliver, and S. S. Novak. 1984. Fish populations in Pond C, a review of the literature. SWED-84-0501. Savannah River Ecology Laboratory, Aiken, S.C.
- McCulley, H. H. 1962. The relationship of the Percidae and the Centrarchidae to the Serranidae as shown by the anatomy of their scales. *Am. Zool.* 2:247.
- McFarlane, R. W., F. F. Frietsche, and R. D. Miracle. 1978. Impingement and entrainment of fishes at the Savannah River Plant: an NPDES 316b demonstration. DP-1494. E. I. du Pont de Nemours and Co., Savannah River Laboratory, Aiken, S.C.
- McIlwain, T. D. 1970. Stomach contents and length-weight relationships of chain pickerel (*Esox niger*) in south Mississippi waters. *Trans. Am. Fish. Soc.* 99:439-440.
- McInerney, M. C., and D. J. Degan. 1991. Dynamics of a black crappie population in a heterogeneous cooling reservoir. *N. Am. J. Fish. Manage.* 11:525-533.
- McKenzie, D. J., and D. J. Randall. 1990. Does *Amia calva* estivate? *Fish Physiol. Biochem.* 8(2):147-158.
- McLarney, W. O., D. G. Engstrom, and J. H. Todd. 1974. Effects of increasing temperature on social behavior in groups of yellow bullhead (*Ictalurus natalis*). *Environ. Poll.* 7:111-119.
- McLean, B., P. T. Singley, D. M. Lodge, and R. A. Wallace. 1982. Synchronous spawning of threadfin shad. *Copeia* 1982:952-955.
- McMahon, T. E. 1982. Habitat suitability index models: creek chub. FWS/OBS-82/10.4. U.S. Department of the Interior, Fish and Wildlife Service, Washington, D.C.
- McNeely, D. L. 1987. Niche relationships within an Ozark stream cyprinid assemblage. *Environ. Biol. Fishes* 18:195-208.
- McSwain, L. E., and R. M. Gennings. 1972. Spawning behavior of the spotted sucker *Minytrema melanops* (Rafinesque). *Trans. Am. Fish. Soc.* 101:739-740.
- Meador, M. R., A. G. Eversole, and J. S. Bulak. 1984. Utilization of portions of the Santee River system by spawning blueback herring. *N. Am. J. Fish. Manage.* 4:155-163.
- Meehan, W. E. 1910. Experiments in sturgeon culture. *Trans. Am. Fish. Soc.* 39:85-91.
- Meffe, G. K. 1991. Failed invasion of a southeastern blackwater stream by bluegills: implications for conservation of native communities. *Trans. Am. Fish. Soc.* 120:333-338.
- Meffe, G. K., D. L. Certain, and A. L. Sheldon. 1988. Selective mortality of post-spawning yellowfin shiners, *Notropis lutipinnis* (Pisces: Cyprinidae). *Copeia* 1988:853-858.
- Meffe, G. K., and A. L. Sheldon. 1988. The influence of habitat structure on fish assemblage composition in southeastern blackwater streams. *Am. Midl. Nat.* 120(2):225-239.
- Melvin, G. D., M. J. Dadswell, and J. D. Martin. 1986. Fidelity of American shad, *Alosa sapidissima* (Clupeidae), to its river of previous spawning. *Can. J. Fish. Aquat. Sci.* 43:640-646.
- Menhinick, E. F. 1991. The freshwater fishes of North Carolina. North Carolina Wildlife Resources Commission, Raleigh.
- Merriner, J. V. 1971. Development of intergeneric centrarchid hybrid embryos. *Trans. Am. Fish. Soc.* 100(4):611-618.
- Mettee, M. F. 1974. A study on the reproductive behavior, embryology, and larval development of the pygmy sunfishes of the genus *Elassoma*. Doctoral dissertation, University of Alabama, Tuscaloosa.
- Mettee, M. F., P. E. O'Neil, and J. M. Pierson. 1996. Fishes of Alabama and the Mobile Basin. Oxmoor House, Birmingham, Ala.
- Meyers, C. D., and R. J. Muncy. 1962. Summer food and growth of chain pickerel, *Esox niger*, in brackish waters of the Severn River, Maryland. *Chesapeake Sci.* 3:125-128.
- Middaugh, D. P. 1981. Reproductive ecology and spawning periodicity of the Atlantic silverside, *Menidia menidia* (Pisces: Atherinidae). *Copeia* 1981:766-776.
- Middaugh, D. P., R. G. Domey, and G. I. Scott. 1984. Reproductive rhythmicity of the Atlantic silverside. *Trans. Am. Fish. Soc.* 113:472-478.
- Middaugh, D. P., and M. J. Hemmer. 1987. Reproductive ecology of the tidewater silverside, *Menidia peninsulae* (Pisces: Atherinidae) from Santa Rosa Island, Florida. *Copeia* 1987:727-732.
- Middaugh, D. P., M. J. Hemmer, and Y. Lamadrid-Rose. 1986. Laboratory spawning cues in *Menidia beryllina* and *M. peninsulae* (Pisces, Atherinidae) with notes on survival and growth of larvae at different salinities. *Environ. Biol. Fishes* 15:107-117.
- Middaugh, D. P., G. I. Scott, and J. M. Dean. 1981. Reproductive behavior of the Atlantic silverside, *Menidia menidia* (Pisces, Atherinidae). *Environ. Biol. Fishes* 6:269-276.
- Migdalski, E. C. 1962. Angler's guide to freshwater sportfishes of North America. Ronald Press, New York.

- Millard, M. J. 1981. Comparative larval development of the pugnose minnow, *Notropis emiliae*, and the taillight shiner, *Notropis maculatus* (Pisces: Cyprinidae). Master's thesis, Louisiana State University, Baton Rouge.
- Miller, H. C. 1963. The behavior of the pumpkinseed sunfish, *Lepomis gibbosus* (Linnaeus), with notes on the behavior of other species of *Lepomis* and the pygmy sunfish, *Elassoma evergladei*. Behaviour 22:88-151.
- Miller, G. L., and G. H. Clemmer. 1980. Morphometric analysis of Gulf Coast populations of *Enneacanthus gloriosus* (Centrarchidae). ASB Bull. 27(2):51 (abstract).
- Miller, R. J. 1964. Behavior and ecology of some North American cyprinid fishes. Am. Midl. Nat. 72:313-357.
- Miller, R. R. 1963. Genus *Dorosoma* Rafinesque 1820; gizzard shads, threadfin shad. Pages 443-451 in Fishes of the western North Atlantic. Sears Foundation for Marine Research, Mem. 1, pt. 3.
- Miller, S. J., D. D. Fox, L. A. Bull, and T. D. McCall. 1990. Population dynamics of black crappie in Lake Okechobee, Florida, following suspension of commercial harvest. N. Am. J. Fish. Manage. 10:98-105.
- Milstein, C. B. 1981. Abundance and distribution of juvenile *Alosa* species off southern New Jersey. Trans. Am. Fish. Soc. 110:306-309.
- Minckley, W. E. 1963. The ecology of a spring stream, Doc Run, Meade County, Kentucky. Wildl. Monogr. 11.
- Ming, A. D. 1968. Life history of the grass pickerel, *Esox americanus vermiculatus*, in Oklahoma. Bull. Okla. Fish Res. Lab. 8:66.
- Mittelbach, G. G. 1984. Predation and resource partitioning in two sunfishes (Centrarchidae). Ecology 65:449-513.
- Mittelbach, G. G., and C. W. Osenberg. 1993. Stage-structured interactions in bluegill: consequences of adult resource variation. Ecology 74(8):2381-2394.
- Mittelbach, G. G., C. W. Osenberg, and P. C. Wainwright. 1992. Variation in resource abundance affects diet and feeding morphology in the pumpkinseed sunfish (*Lepomis gibbosus*). Oecologia 90:8-13.
- Mittelbach, G. G., and L. Persson. 1998. The ontogeny of piscivory and its ecological consequences. Can. J. Fish. Aquat. Sci. 55:1454-1465.
- Mohler, H. J., F. W. Whicker, and T. G. Hinton. 1997. Temporal trends of <sup>137</sup>Cs in an abandoned reactor cooling reservoir. J. Environ. Radioact. 37:251-268.
- Moore, G. A., and W. E. Burris. 1956. Description of the lateral-line system of the pirate perch, *Aphredoderus sayanus*. Copeia 1956:18-22.
- Monzyk, F. P., W. E. Kelso, and D. A. Rutherford. 1997. Characteristics of woody cover used by brown madtoms and pirate perch in Coastal Plain streams. Trans. Am. Fish. Soc. 126:665-675.
- Morgan, G. D. 1954. The life history of the white crappie (*Pomoxis annularis*) of Buckeye Lake, Ohio. J. Sci. Lab. Denison Univ. 43(6-8):113-144.
- Moroz, V. N. 1968. Description of the spawning stock, spawning and fertility of carp from the Kiliya Delta of the Danube. Probl. Ichthyol. 8(3):414-421.
- Morse, J. C., J. W. Chapin, D. D. Herlong, and R. S. Harvey. 1980. Aquatic insects of Upper Three Runs Creek, Savannah River Plant, South Carolina. Part 1: Orders other than Diptera. J. Ga. Entomol. Soc. 15(1):73-101.
- Morse, J. C., J. W. Chapin, D. D. Herlong, and R. S. Harvey. 1983. Aquatic insects of Upper Three Runs Creek, Savannah River Plant, South Carolina. Part 2: Diptera. J. Ga. Entomol. Soc. 18(3):303-316.
- Moser, M. L., M. Bain, M. R. Collins, H. Haley, B. Kyndard, J. C. O'Herron II, G. Rogers, and T. S. Squiers. 2000. A protocol for use of shortnose and Atlantic sturgeons. NOAA Tech. Mem. NMFS-OPR-18.
- Moser, M. L., and S. W. Ross. 1995. Habitat use and movements of shortnose and Atlantic sturgeons in the lower Cape Fear River, North Carolina. Trans. Am. Fish. Soc. 124:2125-234.
- Moshenko, R. W., and J. H. Gee. 1973. Diet, time and place of spawning, and environment occupied by creek chub (*Semotilus atromaculatus*) in the Mink River, Manitoba. J. Fish. Res. Board Can. 30:357-362.
- Moyle, P. B. 2002. Inland fishes of California, revised and expanded edition. University of California Press, Berkeley.
- Mullan, J. W., L. Applegate, and W. C. Rainwater. 1968. Food of logperch (*Percina caprodes*) and brook silverside (*Labidesthes sicculus*) in a new and old Ozark reservoir. Trans. Am. Fish. Soc. 97:300-305.
- Mulligan, T. J., F. D. Martin, R. A. Smucker, and D. A. Wright. 1987. A method for stock identification based on elemental composition of striped bass, *Morone saxatilis* (Walbaum) otoliths. J. Exp. Mar. Biol. Ecol. 114:241-248.
- Muncy, R. J. 1962. Life history of the yellow perch, *Perca flavescens*, in estuarine waters of Severn River, a tributary of Chesapeake Bay, Maryland. Chesapeake Sci. 3:143-159.
- Mundahl, N. D., C. Melnytschuk, D. K. Spielman, J. P. Harkins, K. Funk, and A. M. Bilicki. 1998. Effectiveness of bowfin as a predator on bluegill in a vegetated lake. N. Am. J. Fish. Manage. 18:286-294.
- Munger, C. R., G. R. Wilde, and B. J. Follis. 1994. Flathead catfish age and size at maturation in Texas. N. Am. J. Fish. Manage. 14:403-408.
- Muoneke, M. I., C. C. Henry, and O. E. Maughan. 1992. Population structure and food habits of white crappie

- Pomoxis annularis* Rafinesque in a turbid Oklahoma reservoir. *J. Fish Biol.* 41:647-654.
- Murdy, E. O., R. S. Birdsong, and J. A. Musick. 1997. *Fishes of the Chesapeake Bay*. Smithsonian Institution Press, Washington, D.C.
- Music, J. L. Jr. 1981. Assessment of Georgia's 1980 commercial shad season. Georgia Department of Natural Resources, Coastal Resources Division, Brunswick.
- Muska, C. F., and R. A. Matthews. 1983. Biological assessment for the shortnose sturgeon, *Acipenser brevirostrum* (Lesueur, 1818), in the Savannah River Plant. DPST-83-754. E. I. du Pont de Nemours and Co., Savannah River Laboratory, Aiken, S.C.
- Myers, J. J., and C. C. Kohler. 2000. Acute responses to salinity for sunshine bass and palmetto bass. *N. Am. J. Aquacult.* 62:195-202.
- Nahamura, M. 1969. Cyprinid fishes of Japan -- studies of the life history of cyprinid fishes of Japan. *Res. Inst. Nat. Resour. Spec. Pub.* 4:455.
- National Science Center's Fort Discovery. 2002. Southeast fisheries. Educational Technology Training Center -- NSC, Augusta, Ga.
- NCDENR [North Carolina Department of Environment and Natural Resources]. 2001. Standard operating procedure biological monitoring: stream fish community assessment & fish tissue. Division of Water Quality, Water Quality Section, Environmental Sciences Branch, Biological Assessment Unit, Raleigh.
- Neill, W. T. 1950. An estivating bowfin. *Copeia* 1950:240.
- Nelson, E. A., R. K. Kolka, C. C. Tretin, and J. Wisniewski, editors. 2000. Restoration of the severely impacted riparian wetland system. *Ecol. Engineer.* 15, Suppl. 1:S67-S78.
- Nelson, J. S. 1968. Life history of the brook silverside *Labidesthes sicculus*, in Crooked Lake, Indiana. *Trans. Am. Fish. Soc.* 97:293-296.
- Nelson, J. S. 1994. *Fishes of the world*, 3rd edition. John Wiley and Sons, New York.
- Nesbit, D. H., and G. K. Meffe. 1993. Cannibalism frequencies in wild populations of the eastern mosquitofish (*Gambusia holbrooki*: Poeciliidae) in South Carolina. *Copeia* 1993:867-870.
- Nestler, J. M., R. A. Goodwin, T. H. Cole, D. Degan, and D. Dennerline. 2002. Simulating movement patterns of blueback herring in a stratified southern impoundment. *Trans. Am. Fish. Soc.* 131:55-69.
- Netsch, N. F. 1967. Food and feeding habits of longnose gar in central Missouri. *Proc. Annu. Conf. Southeast. Assoc. Game Fish Comm.* 18(1964):506-511.
- Netsch, N. F., and A. Witt Jr. 1962. Contributions to the life history of the longnose gar (*Lepisosteus osseus*) in Missouri. *Trans. Am. Fish. Soc.* 91:251-262.
- Neves, R. J., and L. Depres. 1979. The oceanic migration of American shad, *Alosa sapidissima*, along the Atlantic Coast. *Fish. Bull.* 17:199-212.
- Newcomb, B. A. 1989. Winter abundance of channel catfish in the channelized Missouri River, Nebraska. *N. Am. J. Fish. Manage.* 9:195-202.
- Nichols, P. R. 1959. Extreme loss in body weight on an American shad (*Alosa sapidissima*). *Copeia* 1959:343-344.
- Nickum, J. G. 1988. Guidelines for use of fishes in field research. *Fisheries* 13(2):16-23.
- Nielsen, L. A., and D. L. Johnson. 1983. *Fisheries techniques*. American Fisheries Society, Bethesda, Md.
- Nikolsky, G. V. 1963. *The ecology of fishes*. Academic Press, New York and London.
- Northcote, T. G., and R. J. Paterson. 1960. Relationship between number of pyloric caeca and length of juvenile rainbow trout. *Copeia* 1960:248-250.
- Ogburn, M. V., D. M. Allen, W. K. Michener. 1988. Fishes, shrimps, and crabs of the North Inlet estuary, SC: a four year seine and trawl survey. Belle W. Baruch Institute for Marine Coastal Sciences, University of South Carolina.
- Okada, Y. 1959-1960. Studies of the freshwater fishes of Japan. Prefectural University of Mie Tsu, Mie Prefecture, Japan.
- Oliviera, K. 1999. Life history characteristics and strategies of the American eel, *Anguilla rostrata*. *Can. J. Fish. Aquat. Sci.* 56:795-802.
- Olmsted, L. L., and D. G. Cloutman. 1979. Life history of the flat bullhead, *Ictalurus platycephalus*, in Lake Norman, North Carolina. *Trans. Am. Fish. Soc.* 108:38-42.
- Olson, M. H. 1996. Ontogenetic niche shifts in largemouth bass: variability and consequences for first-year growth. *Ecology* 77(1):179-190.
- Olson, M. H., G. G. Mittelbach, and C. W. Osenberg. 1995. Competition between predator and prey: resource-based mechanisms and implications for stage-structured dynamics. *Ecology* 76(6):1758-1771.
- Osenberg, C. W., G. G. Mittelbach, and P. C. Wainwright. 1992. Two-stage life histories in fish: the interaction between juvenile competition and adult performance. *Ecology* 73:255-267.
- Osteen, D. V., A. G. Eversole, and R. W. Christie. 1989. Spawning utilization of an abandoned ricefield by blueback herring. Pages 552-565 in R. R. Sharitz and J. W. Gibbons, editors. *Freshwater wetlands and wildlife*. Office of Science Technical Information, Oak Ridge, Tenn.
- Page, L. M. 1983. *Handbook of darters*. T. F. H. Publications, Neptune City, N.J.
- Page, L. M. 1985. Evolution of reproductive behaviors in percid fishes. III. *Nat. Hist. Surv. Bull.* 33(3):275-295.

- Page, L. M., and H. L. Bart Jr. 1989. Egg mimics in darters (Pisces: Percidae). *Copeia* 1989:514-517.
- Page, L. M., and B. M. Burr. 1991. A field guide to freshwater fishes of North America north of Mexico. Houghton Mifflin, Boston.
- Page, L. M., and C. E. Johnston. 1990a. Spawning in the creek chubsucker, *Erimyzon oblongus*, with a review of spawning behavior in suckers (Catostomidae). *Environ. Biol. Fishes* 27:265-272.
- Page, L. M., and C. E. Johnston. 1990b. The breeding behavior of *Opsopoeodus emiliae* (Cyprinidae) and its phylogenetic implications. *Copeia* 1990:1176-1180.
- Paller, M. H. 1987. Distribution of larval fish between macrophyte beds and open channels in a southeastern floodplain swamp. *J. Freshw. Ecol.* 4:191-200.
- Paller, M. H. 1994. Relationships between fish assemblage structure and stream order in South Carolina Coastal Plain streams. *Trans. Am. Fish. Soc.* 123:150-161.
- Paller, M. H. 1995. Relationships among number of fish species sampled, reach length surveyed, and sampling effort in South Carolina Coastal Plain streams. *N. Am. J. Fish. Manage.* 15:110-120.
- Paller, M. H. 1997. Recovery of a reservoir fish community from drawdown related impacts. *N. Am. J. Fish. Manage.* 17:726-733.
- Paller, M. H. n.d. Long-term development of the fish assemblage in a southeastern reservoir. Unpublished manuscript.
- Paller, M. H., and S. A. Dyer. 1999. Biotic integrity of streams in the Savannah River Site integrator operable units. WSRC-TR-00112. Savannah River Technology Center, Aiken, S.C.
- Paller, M. H., J. B. Gladden, and J. H. Heuer. 1992. Development of the fish community in a new South Carolina reservoir. *Am. Midl. Nat.* 128:95-114.
- Paller, M. H., J. H. Heuer, L. A. Kissick, and H. G. Mealing. 1988. L-Lake fish: L-Lake/Steel Creek biological monitoring program, January 1986-December 1987. ECS-SR-65. Prepared by Environmental and Chemical Sciences, Inc., for Savannah River Laboratory, E. I. du Pont de Nemours and Co., Aiken, S.C.
- Paller, M. H., J. W. Littrell, and E. L. Peters. 1999. Ecological half-lives of  $^{137}\text{Cs}$  in fishes from the Savannah River Site. *Health Physics* 77:392-402.
- Paller, M. H., J. O'Hara, and D. V. Osteen. 1985. Annual report on the Savannah River aquatic ecology program, September 1983-August 1984. Volume 2: Ichthyoplankton. DPST-85-377. Environmental and Chemical Sciences, Inc., for Savannah River Laboratory, E. I. du Pont de Nemours and Co., Aiken, S.C.
- Paller, M. H., J. O'Hara, D. V. Osteen, W. Specht, and H. Kania. 1984. Annual report on the Savannah River aquatic ecology program—September 1982 to August 1983. Volume 1: Adult fish. DPST-84-252. Environmental and Chemical Sciences, Inc., for Savannah River Laboratory, E. I. du Pont de Nemours and Co., Aiken, S.C.
- Paller, M. H., M. J. M. Reichert, and J. M. Dean. 1996. The use of fish communities to assess environmental impacts in South Carolina Coastal Plain streams. *Trans. Am. Fish. Soc.* 125:633-644.
- Paller, M. H., M. J. M. Reichert, J. M. Dean, and J. C. Seigle. 2000. Use of fish community data to evaluate restoration success in a riparian stream. *Ecol. Engineer.* 15, Suppl. 1:S171-S187.
- Paller, M. H., and B. M. Saul. 1985. Final report on the adult fish and ichthyoplankton of Par Pond and Pond B: January 1984-June 1985. ECS-SR-22. Prepared by Environmental and Chemical Sciences, Inc., for E. I. du Pont de Nemours and Co., Aiken, S.C.
- Paller, M. H., and B. M. Saul. 1986. Effects of thermal discharges on the distribution and abundance of adult and juvenile fishes in the Savannah River and selected tributaries. ECS-SR-28. Environmental and Chemical Sciences, Inc., Aiken, S.C. 257 pp.
- Paller, M. H., B. H. Saul, and D. W. Hughes. 1986a. The distribution of ichthyoplankton in thermal and non-thermal creeks and swamps on the Savannah River Plant. February-July 1985. ECS-SR-25. Environmental and Chemical Sciences, Inc., for E. I. du Pont de Nemours and Co., Aiken, S.C.
- Paller, M. H., B. M. Saul, and D. V. Osteen. 1986b. Distribution and abundance of ichthyoplankton in the mid-reaches of the Savannah River and selected tributaries. DPST-86-798. Environmental and Chemical Sciences, Inc., for Savannah River Laboratory, E. I. du Pont de Nemours and Co., Aiken, S.C.
- Panek, F. M., and C. R. Cofield. 1978. Fecundity of bluegill and warmouth from a South Carolina blackwater lake. *Progr. Fish-Cult.* 40(2):67-68.
- Pardue, G. B. 1983. Habitat suitability index models: alewife and blueback herring. FWS/OBS-82/10.58. U.S. Department of the Interior, Fish and Wildlife Service, Washington, D.C.
- Pardue, G. B. 1993. Life history and ecology of the mud sunfish (*Acantharchus pomolis*). *Copeia* 1993:533-540.
- Pardue, G. B., and F. E. Hester. 1967. Variation in growth rate of known-age largemouth bass (*Micropterus salmoides* Lacépède) under experimental conditions. *Proc. Southeast. Assoc. Game Fish Comm.* 20:300-310.
- Parker, B. R., and W. G. Franzin. 1991. Reproductive biology of the quillback, *Carpoides cyprinus*, in a small prairie river. *Can. J. Zool.* 69:2133-2139.

- Parker, B. R., and W. G. Franzin. 1994. Age determination and growth of quillback from Dauphin Lake, Manitoba. *Can. Tech. Rep. Fish. Aquat. Sci.* 1977.
- Parker, E. D., M. F. Hirshfield, and J. W. Gibbons. 1973. Ecological comparisons of thermally affected aquatic environments. *J. Water Poll. Control Fed.* 45:726-733.
- Parker, N. C., and B. A. Simco. 1975. Activity patterns, feeding and behavior of the pirate perch, *Aphredoderus sayanus*. *Copeia* 1975:572-574.
- Parker, W. D. 1971. Preliminary studies on sexing adult largemouth bass by means of an external characteristic. *Progr. Fish-Cult.* 33:54-55.
- Parsons, J. W. 1954. Growth and habits of the redeye bass. *Trans. Am. Fish. Soc.* 83:202-211.
- Partridge, D. G., and D. R. DeVries. 1999. Regulation of growth and mortality in larval bluegills: implications for juvenile recruitment. *Trans. Am. Fish. Soc.* 128:625-638.
- Pearson, W. D., and B. J. Pearson. 1989. Fishes of the Ohio River. *Ohio J. Sci.* 89:181-187.
- Pearson, W. D., G. A. Thomas, and A. L. Clark. 1979. Early piscivory and timing of the critical period in post-larval longnose gar at mile 571 of the Ohio River. *Trans. Ky. Acad. Sci.* 40:122-128.
- Peer, D. L. 1966. Relationship between size and maturity in the spottail shiner, *Notropis hudsonius*. *J. Fish. Res. Board Can.* 23:455-457.
- Pekovitch, A. W. 1979. Distribution and some life history aspects of the shortnose sturgeon (*Acipenser brevirostrum*). Hazleton Environmental Sciences Corp., Northbrook, N.Y.
- Pellet, T. D., G. J. Van Dyck, and J. V. Adams. 1998. Seasonal migration and homing of channel catfish in the lower Wisconsin River, Wisconsin. *N. Am. J. Fish. Manage.* 18:85-95.
- Perry, W. G., and D. C. Carver. 1973. Length at maturity and total length-collarbone length conversions for channel catfish, *Ictalurus punctatus*, and blue catfish, *Ictalurus furcatus*, collected from the marshes of southwest Louisiana. *Proc. Ann. Conf. Southeast. Assoc. Game Fish Comm.* 26(1972):541-553.
- Peterson, M. S., and S. T. Ross. 1987. Morphometric and meristic characteristics of a peripheral population of *Enneacanthus*. *Proc. Southeast. Fishes Council.* 17:1-4.
- Peterson, M. S., and S. J. VanderKooy. 1997. Distribution, habitat characterization, and aspects of reproduction of a peripheral population of bluespotted sunfish *Enneacanthus gloriosus* (Holbrook). *J. Freshw. Ecol.* 12:151-161.
- Peterson, T. L. 1996. Seasonal migration in the southern hogchoker, *Trinectes maculatus fasciatus* (Archiridae). *Gulf Res. Rep.* 9:169-176.
- Peterson-Curtis, T. L. 1996. Partial life history of southern hogchokers, *Trinectes maculatus fasciatus*, in the back bay of Biloxi, Mississippi. *Gulf Mex. Sci.* 2:81-88.
- Pezold, F. L., and R. J. Edwards. 1983. Additions to the Texas marine ichthyofauna, with notes on the Rio Grande estuary. *Southwest. Nat.* 28:102-105.
- Pflieger, W. L. 1975. The fishes of Missouri. Missouri Department of Conservation, Jefferson City.
- Phillip, D. A. T. 1993. Reproduction and feeding of the mountain mullet *Agonostomus monticola*, in Trinidad, West Indies. *Environ. Biol. Fishes* 37:47-55.
- Phillips, C. 1958. An unusually colored garfish, *Lepisosteus platyrhincus*. *Copeia* 1958(4):331.
- Pierce, C. L., K. A. Musgrove, J. Ritterpusch, and N. E. Carl. 1987. Littoral invertebrate abundance in bluegill spawning colonies and undisturbed areas of a small pond. *Can. J. Zool.* 65:2066-2071.
- Pierce, R. J., T. E. Wissing, and B. A. Magrey. 1981. Aspects of feeding ecology of gizzard shad in Acton Lake, Ohio. *Trans. Am. Fish. Soc.* 110:391-395.
- Pigg, J. 1998. Melanism in longnose gar, *Lepisosteus osseus* (Linnaeus) (Lepisosteidae). *Proc. Okla. Acad. Sci.* 78:123.
- Pipas, J. C., and F. J. Bulow. 1998. Hybridization between redeye bass and smallmouth bass in Tennessee streams. *Trans. Am. Fish. Soc.* 127:141-149.
- Piper, R. G., I. B. McElwain, L. E. Orme, J. P. McCraren, L. G. Fowler, and J. R. Leonard. 1982. Fish hatchery management. U.S. Department of the Interior, Fish and Wildlife Service, Washington, D.C.
- Pope, K. L., and D. W. Willis. 1997. Environmental characteristics of black crappie (*Pomoxis nigromaculatus*) nesting sites in two South Dakota waters. *Ecol. Freshw. Fish* 1997:183-189.
- Poulson, T. L. 1963. Cave adaptation in amblyopsid fishes. *Am. Midl. Nat.* 70:257-290.
- Poulson, T. L., and W. B. White. 1969. The cave environment. *Science* 165:971-980.
- Powles, P. M., D. Parker, and R. Reid. 1977. Growth, maturation, and apparent and absolute fecundity of creek chub, *Semotilus atromaculatus* (Mitchill), in the Kawartha Lakes region, Ontario. *Can. J. Zool.* 55:843-846.
- Quattro, J. M., T. W. Greig, D. K. Coykendall, B. W. Bowen, and J. D. Baldwin. 2002. Genetic issues in aquatic species management: the shortnose sturgeon (*Acipenser brevirostrum*) in the southeastern United States. *Conserv. Genet.* 3:155-166.
- Quattro, J. M., W. J. Jones, J. M. Grady, and F. C. Rohde. 2001b. Gene-gene concordance and the phylogenetic relationships among rare and widespread pygmy sunfishes (genus *Elassoma*). *Mol. Phylogenet. Evol.* 18:217-226.
- Quattro, J. M., W. J. Jones, and F. C. Rohde. 2001a. Evolu-

- tionarily significant units of rare pygmy sunfishes (genus *Elassoma*). *Copeia* 2001:514–520.
- Quinn, T., G. W. Esch, T. C. Hazen, and J. W. Gibbons. 1978. Long range movement and homing by largemouth bass (*Micropterus salmoides*) in a thermally altered reservoir. *Copeia* 1978:542–545.
- Rabito, F. G. Jr., and D. C. Heins. 1985. Spawning behaviour and sexual dimorphism in the North American cyprinid fish *Notropis leedsii*, the bannerfin shiner. *J. Nat. Hist.* 19:155–163.
- Rahel, F. J., and W. A. Hubert. 1991. Fish assemblages and habitat gradients in a Rocky Mountain–Great Plains stream: biotic zonation and additive patterns of community change. *Trans. Am. Fish. Soc.* 120:319–332.
- Raibley, P. T., D. Blodgett, and R. E. Sparks. 1995. Evidence of grass carp (*Ctenopharyngodon idella*) reproduction in the Illinois and upper Mississippi rivers. *J. Freshw. Ecol.* 10:65–74.
- Rakocinski, C. F., M. S. Peterson, S. J. VanderKooy, and G. J. Crego. 1997. Biodiversity patterns of littoral tidal river fishes in the Gulf Plain region of Mississippi. *Gulf Mex. Sci.* 1997:2–16.
- Raney, E. C. 1939. The breeding habits of the silvery minnow, *Hybognathus regius* (Girard). *Am. Midl. Nat.* 21:674–680.
- Raney, E. C. 1942. Propagation of the silvery minnow (*Hybognathus nuchalis regius* (Girard)) in ponds. *Trans. Am. Fish. Soc.* 71:215–218.
- Raney, E. C. 1947. *Nocomis* nests used by other breeding cyprinid fishes in Virginia. *Zoologica* 32:125–132.
- Raney, E., and E. Lachner. 1943. Age and growth of Johnny darters, *Boleosoma nigrum olmstedii* (Storer) and *Boleosoma longimanum* (Jordan). *Am. Midl. Nat.* 29:229–238.
- Rasmussen, R. P. 1980. Egg and larval development of the brook silverside from the Peace River, Florida. *Trans. Am. Fish. Soc.* 109:407–416.
- Reagan, R. E., and W. M. Wingo. 1985. Southern flounder — species profiles: life histories and environmental requirements of coastal fishes and invertebrates (Gulf of Mexico). *Biol. Rep.* 82(11:30). U.S. Department of the Interior, Fish and Wildlife Service, Washington, D.C.
- Reichert, M. J. M. 1995. Index of biotic integrity: results of sampling the fish assemblage of 13 creeks at the Savannah River Site area in the fall and winter of 1994/95. Report to Westinghouse Savannah River Co., Aiken, S.C.
- Reichert, M. J. M., and H. W. Van der Veer. 1991. Settlement, abundance, growth and mortality of juvenile flatfish in a subtropical tidal estuary (Georgia, U.S.A.). *Neth. J. Sea. Res.* 27:375–391.
- Reighard, J. 1901. Some further notes on the breeding habits of *Amia*. *Rep. Mich. Acad. Sci.* 3:80–81.
- Reighard, J. 1903. The natural history of *Amia calva* Linnaeus. Pages 59–109 in E. L. Mark Anniversary Volume. Henry Holt, New York.
- Reighard, J. 1910. Methods of studying the habits of fishes, with an account of the breeding habits of the horned dace. *Bull. U.S. Bur. Fish.* 28:1111–1136.
- Reighard, J. 1931. Observations on the breeding habits of fishes at Havana, Illinois 1910–1911. *Bull. Ill. State Lab. Nat. Hist.* 9:405–416.
- Reighard, J., and J. Phelps. 1908. The development of the adhesive organ and head mesoblast of *Amia*. *J. Morphol.* 19(2):469–496.
- Relyea, K., and B. Sutton. 1973. Cave dwelling yellow bullheads in Florida. *Q. J. Fla. Acad. Sci.* 36:31–34.
- Rettig, J. E. 1998. Variation in species composition of the larval assemblage in four southwest Michigan lakes: using allozyme analysis to identify larval sunfish. *Trans. Am. Fish. Soc.* 127:661–668.
- Reynolds, W. W., and M. E. Casterlin. 1978. Ontogenetic changes in preferred temperature and diel activity of the yellow bullhead, *Ictalurus natalis*. *Comp. Biochem. Physiol.* 59:409–411.
- Rice, J. A., J. E. Breck, S. M. Bartell, and J. F. Kitchell. 1983. Evaluating the constraints of temperature, activity and consumption on growth of largemouth bass. *Environ. Biol. Fishes* 9:263–275.
- Richards, W. J. 1966. Systematics of the percid fishes of the *Etheostoma thalassinum* species group with comments on the subgenus *Etheostoma*. *Copeia* 1966:823–838.
- Richardson, R. F. 1913. Observations on the breeding habits of fishes at Havana, Illinois, 1910 and 1911. *Bull. Ill. State Lab. Nat. Hist.* 9:405–416.
- Rivas, L. R. 1966. The taxonomic status of the cyprinodontid fishes *Fundulus notti* and *F. lineolatus*. *Copeia* 1966:353–354.
- Robins, C. R., R. M. Bailey, C. E. Bond, J. R. Brooker, E. A. Lachner, R. N. Lea, and W. B. Scott. 1991. A list of common and scientific names of fishes from the United States and Canada, 5th edition. *Am. Fish. Soc. Spec. Pub.* 20.
- Robins, C. R., and G. C. Ray. 1986. A field guide to the Atlantic Coast fishes, North America. Houghton Mifflin, New York.
- Robinson, B. W., and D. S. Wilson. 1996. Genetic variation and phenotypic plasticity in a polymorphic population of pumpkinseed sunfish (*Lepomis gibbosus*). *Evol. Ecol.* 10:631–652.
- Robinson, B. W., D. S. Wilson, and A. S. Margosian. 2000. A pluralistic analysis of character release in pumpkinseed sunfish (*Lepomis gibbosus*). *Ecology* 81(10):2799–2812.

- Robison, H. W. 1977. Distribution, habitat notes, and status of the ironcolor shiner, *Notropis chalybaeus* (Cope), in Arkansas. *Ark. Acad. Sci. Proc.* 31:92-94.
- Robison, H. W. 1978. Distribution and habitat of the tail-light shiner, *Notropis maculatus* (Hay), in Arkansas. *Ark. Acad. Sci. Proc.* 32:68-70.
- Robison, H. W., and T. M. Buchanan. 1984. *Fishes of Arkansas*. University of Arkansas Press, Fayetteville.
- Rohde, F. C., and R. G. Arndt. 1987. Two new species of pygmy sunfishes (Elassomatidae, *Elassoma*) from the Carolinas. *Proc. Acad. Nat. Sci. Phila.* 139:65-85.
- Rohde, F. C., R. G. Arndt, D. G. Lindquist, and James F. Parnell. 1994. *Freshwater fishes of the Carolinas, Virginia, Maryland and Delaware*. University of North Carolina Press, Chapel Hill.
- Ross, M. R. 1976. Nest-entry behavior of female creek chubs (*Semotilus atromaculatus*) in different habitats. *Copeia* 1976:378-380.
- Ross, M. R. 1977. Aggression as a social mechanism in the creek chub (*Semotilus atromaculatus*). *Copeia* 1977:393-397.
- Ross, R. M., W. A. Lellis, R. M. Bennett, and C. S. Johnson. 2001. Landscape determinants of nonindigenous fish invasions. *Biol. Invasions* 3:347-361.
- Ross, S. T. 2001. *The inland fishes of Mississippi*. University of Mississippi Press, Jackson.
- Ross, S. T., and J. A. Baker. 1983. The response of fishes to periodic spring floods in a southeastern stream. *Am. Midl. Nat.* 109(1):11-14.
- Rubenstein, D. J. 1981a. Individual variation and competition in the Everglades pygmy sunfish. *J. Anim. Ecol.* 50:337-350.
- Rubenstein, D. J. 1981b. Population density, resource patterning, and territoriality in the Everglades pygmy sunfish. *Anim. Behav.* 29:155-172.
- Rudacille, J. B., and C. C. Kohler. 2000. Aquaculture performance comparison of sunshine bass, palmetto bass, and white bass. *N. Am. J. Aquacult.* 62:114-124.
- Rutherford, D. A., K. R. Gelwicks, and W. E. Kelso. 2001. Physiochemical effects of the flood pulse on fishes in the Atchafalaya River basin, Louisiana. *Trans. Am. Fish. Soc.* 130:276-288.
- Ryder, J. A. 1883. Observations on the absorption of the yolk, the food, feeding, and development of embryo fishes, comprising some investigations conducted at the Central Hatchery, Armory Building, Washington, D.C., in 1882. *U.S. Comm. Fish. Bull.* 2:179-205.
- Ryder, J. A. 1890. The sturgeons and sturgeon industries of the eastern coast of the United States, with an account of experiments bearing upon sturgeon culture. *U.S. Comm. Fish. Bull.* 8(1888):231-326.
- Sabaj, M. H., E. G. Maurakis, and W. S. Woolcott. 2000. Spawning behaviors in the bluehead chub, *Nocomis leptoccephalus*, river chub, *N. micropogon*, and central stone-roller, *Campostoma anomalum*. *Am. Midl. Nat.* 144:187-201.
- Sadzikowski, M. R., and D. C. Wallace. 1976. A comparison of the food habits of size classes of three sunfishes [*Lepomis macrochirus* Rafinesque, *L. gibbosus* (Linnaeus) and *L. cyanellus* Rafinesque]. *Am. Midl. Nat.* 95(1):220-225.
- Saecker, J. R., and W. S. Woolcott. 1988. The redbreast sunfish (*Lepomis auritus*) in a thermally influenced section of the James River, Virginia. *Va. J. Sci.* 39(1):1-17.
- Sammons, S. M., and P. W. Bettoli. 1998. Larval sampling as a fisheries management tool: early detection of year-class strength. *N. Am. J. Fish. Manage.* 18:137-143.
- Sammons, S. M., P. W. Bettoli, D. A. Isermann, and T. N. Churchill. 2002. Recruitment variation of crappies in response to hydrology of Tennessee reservoirs. *N. Am. J. Fish. Manage.* 22:1393-1398.
- Savoy, T. F., V. A. Crecco, and B. C. Marcy Jr. 2004. American shad (*Alosa sapidissima*) early life history and recruitment in the Connecticut River: a 40 year summary. In Jacobson, P. M., D. A. Dixon, W. C. Leggett, B. C. Marcy Jr., and R. R. Massengill, editors. *The Connecticut River Ecological Study (1965-1973) revisited: ecology of the Lower Connecticut River, 1973-2003*. *Am. Fish. Soc. Monogr.* 9.
- SCDNR [South Carolina Department of Natural Resources]. 1992. *Langley Pond fish health assessment*. South Carolina Department of Natural Resources, Columbia.
- SCDNR [South Carolina Department of Natural Resources]. 1997. *Langley Pond largemouth bass sampling*. South Carolina Department of Natural Resources, Columbia.
- Schael, D. M., L. G. Rudstam, and J. R. Post. 1991. Gape limitation and prey selection in larval yellow perch (*Perca flavescens*), freshwater drum (*Aplodinotus grunnius*), and black crappie (*Pomoxis nigromaculatus*). *Can. J. Fish. Aquat. Sci.* 48:1919-1925.
- Schaffter, R. G. 1997. Growth of white catfish in California's Sacramento San Joaquin Delta. *Calif. Fish Game* 83:57-67.
- Schalles, J. F., R. R. Sharitz, J. W. Gibbons, G. J. Leverage, and J. N. Knox. 1989. *Carolina bays of the Savannah River Plant*. SRO-NERP-18. Savannah River Ecology Laboratory, Aiken, S.C.
- Schaus, M. H., M. J. Vanni, and T. E. Wissing. 2002. Biomass-dependent diet shifts in omnivorous gizzard shad: implications for growth, food web and ecosystem effects. *Trans. Am. Fish. Soc.* 131:40-54.

- Schemske, D. W. 1974. Age, length and fecundity of the creek chub, *Semotilus atromaculatus* (Mitchill), in central Illinois. *Am. Midl. Nat.* 92:505-509.
- Schlosser, I. J. 1987. A conceptual framework for fish communities in small warmwater streams. Pages 17-24 in W. J. Matthews and D. C. Heines, editors. *Community and evolutionary ecology of North American stream fishes*. University of Oklahoma Press, Norman.
- Schmidt, R. E., and W. R. Whitworth. 1979. Distribution and habitat of the swamp darter (*Etheostoma fusiforme*) in southern New England. *Am. Midl. Nat.* 102:408-413.
- Schneberger, E. 1937. Food of small dogfish, *Amia calva*. *Copeia* 1937:61.
- Schneider, J. C. 1998. Fate of dead fish in a small lake. *Am. Midl. Nat.* 140:192-196.
- Schramm, H. L. Jr. 1989. Formation of annuli in otoliths of bluegills. *Trans. Am. Fish. Soc.* 118:546-555.
- Schubel, J. R., and B. C. Marcy Jr. 1978. Power plant entrainment: a biological assessment. Academic Press, New York.
- Schultz, D. L. 1999a. Comparison of lipid levels during spawning in annual and perennial darters of the subgenus *Boleosoma*, *Etheostoma perlongum*, and *Etheostoma olmstedi*. *Copeia* 1999:906-916.
- Schultz, D. L. 1999b. Population structure, reproduction, and lipid cycling in the dusky shiner (*Notropis cummingsae*) in contrasting streams. *Copeia* 1999(3):669-683.
- Schwartz, F. 1963. The freshwater minnows of Maryland. *Md. Conserv.* 102:19-29.
- Schwartz, F. J. 1964. Natural salinity tolerances of some freshwater fishes. *Underw. Nat.* 2:13-15.
- Schwartz, F. J. 2002. Occurrences [*sic*] of elopiform fishes of the genera *Elops*, *Megalops* and *Albula* in North Carolina. *J. N.C. Acad. Sci.* 118:86-90.
- Scott, W. B. 1954. *Freshwater fishes of eastern Canada*. University of Toronto Press, Toronto, Canada.
- Scott, W. B., and E. J. Crossman. 1973. *Freshwater fishes of Canada*. *Fish. Res. Board Can. Bull.* 184:1-966.
- Secor, D. H. 2002. Estuarine dependency and life history evolution in temperate sea basses. In *Proceedings of the 70th Anniversary International Symposium of the Japanese Scientific Fisheries Society*.
- Secor, D. H., T. E. Gunderson, and K. Karlsson. 2000. Effects of salinity and temperature on growth performance in anadromous (Chesapeake Bay) and non-anadromous (Santee-Cooper) strains of striped bass, *Morone saxatilis*. *Copeia* 2000:291-296.
- Seghers, B. H. 1981. Facultative schooling behavior in the spottail shiner (*Notropis hudsonius*): possible costs and benefits. *Environ. Biol. Fishes* 6:21-24.
- Seidensticker, E. P. 1987. Food selection of alligator gar and longnose gar in a Texas reservoir. *Proc. Annu. Conf. Southeast. Assoc. Fish Wildl. Agencies* 14:100-104.
- Setzler, E. M., W. R. Boynton, K. V. Wood, H. H. Zion, L. Lubbers, K. K. Mountford, P. Frere, L. Tucker, and J. A. Mihursky. 1980. Synopsis of biological data on striped bass, *Morone saxatilis* (Walbaum). NOAA Tech. Rep. NMFS Circ. 433.
- Setzler-Hamilton, E. M., D. A. Wright, F. D. Martin, C. V. Millsaps, and S. I. Whitlow. 1987. Nutritional state analysis and its use in predicting striped bass recruitment: field studies. *Am. Fish. Soc. Symp.* 2:115-128.
- Shao, B. 1997. Nest association of pumpkinseed, *Lepomis gibbosus*, and golden shiner, *Notemigonus crysoleucas*. *Environ. Biol. Fishes* 50:41-48.
- Shealy Environmental Services, Inc. 1990. Fish population assessment of Langley, Vacluse, and Clearview ponds, Aiken County, South Carolina. Report to the Graniteville Co., Graniteville, S.C.
- Sheldon, A. L., and G. K. Meffe. 1993. Multivariate analysis of feeding relationships of fishes in blackwater streams. *Environ. Biol. Fishes* 37:161-171.
- Sheldon, A. L., and G. K. Meffe. 1995. Short-term recolonization by fishes of experimentally defaunated pools of a coastal plain stream. *Copeia* 1995(4):828-837.
- Shelton, W. L., and B. G. Grinstead. 1973. Hybridization between *Dorosoma cepedianum* and *D. petenense* in Lake Texoma, Oklahoma. *Proc. Annu. Conf. Southeast. Assoc. Fish Game Comm.* 26:506-510.
- Shelton, W. L., C. D. Riggs, and L. G. Hill. 1982. Comparative reproductive biology of the threadfin and gizzard shad in Lake Texoma, Oklahoma-Texas. Pages 47-51 in C. F. Bryan, J. V. Conner, and F. M. Truesdale, editors. *The Fifth Annual Larval Fish Conference*. Louisiana Cooperative Fisheries Research Unit.
- Shepherd, M. E., and M. T. Huish. 1978. Age, growth, and diet of the pirate perch in a Coastal Plain stream in North Carolina. *Trans. Am. Fish. Soc.* 107:457-459.
- Shields, J. D., N. D. Woody, A. S. Dicks, G. J. Hollod, J. Schalles, and G. J. Lerversee. 1982. Locations and areas of ponds and Carolina bays at the Savannah River Plant. Savannah River Laboratory, E. I. du Pont de Nemours and Co., Aiken, S.C.
- Shireman, J. V., and C. R. Smith. 1983. Synopsis of biological data on the grass carp. *FAO Fish. Synop.* 135. Food and Agriculture Organization of the United Nations, Rome.
- Shireman, J. V., R. L. Stetler, and D. E. Colle. 1978. Possible use of the lake chubsucker as a baitfish. *Progr. Fish-Cult.* 40:33-34.
- Siefert, R. E. 1968. Reproductive behavior, incubation and mortality of eggs, and postlarval food selection in the white crappie. *Trans. Am. Fish. Soc.* 97(3):252-259.

- Siefert, R. E. 1969. Characteristics for separation of white and black crappie larvae. *Trans. Am. Fish. Soc.* 98(2):326-328.
- Sigler, W. F. 1955. An ecological approach to understanding Utah's carp populations. *Proc. Utah Acad. Sci.* 32:95-104.
- Sigler, W. F. 1958. The ecology and use of the carp in Utah. *Utah Agric. Exp. Stn. Bull.* 405.
- Siler, J. R. 1975. The distribution of fishes in two cooling reservoirs with different heat loads. Master's thesis, University of Georgia, Athens.
- Siler, J. R., and J. P. Clugston. 1975. Largemouth bass under conditions of extreme thermal stress. Pages 333-341 in H. Clepper, editor. *Black bass biology and management. Proceedings of the National Symposium on the Biology and Management of the Centrarchid Bases.* Sport Fishing Institute, Washington, D.C.
- Simon, T. P., and R. Wallus. 1989. Contributions to the early life histories of gar (*Actinopterygii: Lepisosteidae*) in the Ohio and Tennessee river basins with emphasis on larval development. *Trans. Ky. Acad. Sci.* 50:59-74.
- Slastenenko, E. P. 1958. *The freshwater fishes of Canada.* Kiev Printers, Toronto.
- Smallwood, W. M., and M. B. Derrickson. 1933. The development of the carp, *Cyprinus carpio*. II. The development of the liver-pancreas, the islands of Langerhans, and the spleen. *J. Morphol.* 55:15-28.
- Smith, B. A. 1971. The fishes of four low-salinity tidal tributaries of the Delaware River estuary. Master's thesis, Cornell University.
- Smith, D. G., and R. F. Stearley. 1989. The classification and scientific names of rainbow and cutthroat trout. *Fisheries* 14:4-10.
- Smith, H. M. 1907. *The fishes of North Carolina.* N.C. Geol. Econ. Surv. 2. E. M. Uzzell and Co., Raleigh.
- Smith, H. M. 1909. Japanese goldfish, their varieties and cultivation, a practical guide to the Japanese method of goldfish culture for amateurs and professionals. W. F. Roberts Co., Washington, D.C.
- Smith, L. L., and R. H. Kramer. 1964. The spottail shiner in Lower Red Lake, Minnesota. *Trans. Am. Fish. Soc.* 93:35-45.
- Smith, M. H., K. T. Scribner, J. D. Hernandez, and M. C. Wooten. 1989. Demographic, spatial and temporal genetic variation in *Gambusia*. Ecology and evolution of livebearing fishes (*Poeciliidae*). Pages 235-257 in G. K. Meffe and F. F. Snelson, editors. *The ecology and evolution of livebearing fishes (Poeciliidae).* Prentice-Hall, Englewood Cliffs, N.J.
- Smith, P. W. 1979. *The fishes of Illinois.* University of Illinois Press, Urbana.
- Smith, S. M., M. J. Maceina, V. H. Travnichak, and R. A. Dunham. 1995. Failure of quantitative phenotypic characteristics to distinguish black crappie, white crappie, and their first-generation hybrid. *N. Am. J. Fish. Manage.* 15:121-125.
- Smith, T. I. J. 1985. The fishery, biology, and management of Atlantic sturgeon, *Acipenser oxyrinchus*, in North America. *Environ. Biol. Fishes* 14:61-72.
- Smith, T. I. J., M. C. Collins, W. C. Post, and J. W. McCord. 2002a. Stock enhancement of shortnose sturgeon: a case study. *Trans. Am. Fish. Symp.* 28:31-44.
- Smith, T. I. J., E. K. Dingley, and D. E. Marchette. 1980. Induced spawning and culture of Atlantic sturgeon. *Progr. Fish.-Cult.* 42:147-151.
- Smith, T. I. J., D. E. Marchette, and G. F. Ulrich. 1984. The Atlantic sturgeon fishery in South Carolina. *N. Am. J. Fish. Manage.* 4:164-176.
- Smith, T. I. J., J. W. McCord, M. R. Collins, and W. C. Post. 2002b. Occurrence of stocked shortnose sturgeon *Acipenser brevirostrum* in non-targeted rivers. *J. Appl. Ichthyol.* 18:470-474.
- Smithson, E. B., and C. E. Johnston. 1999. Movement patterns of stream fishes in an Ouachita Highlands stream: an examination of the restricted movement paradigm. *Trans. Am. Fish. Soc.* 128:847-853.
- Snodgrass, J. W., A. L. Bryan Jr., J. W. Ackerman, and J. Burger. 1998. Vertebrates collected from isolated wetlands at the Savannah River Site: 1994-1997. Final report to the Set-Aside program. Savannah River Ecology Laboratory, University of Georgia, Aiken, S.C.
- Snodgrass, J. W., A. L. Bryan Jr., R. F. Lide, and G. M. Smith. 1996. Factors affecting the occurrence and structure of fish assemblages in isolated wetlands of the Upper Coastal Plain, U.S.A. *Can. J. Aquat. Sci.* 53:443-454.
- Snodgrass, J. W., and G. K. Meffe. 1998. Influence of beavers on stream fish assemblages: effects of pond age and watershed position. *Ecology* 79:928-942.
- Snodgrass, J. W., and G. K. Meffe. 1999. Habitat use and temporal dynamics of blackwater stream fishes in and adjacent to beaver ponds. *Copeia* 1999(3):628-639.
- Snyder, D. E., M. B. Mulhall Snyder, and S. C. Douglas. 1977. Identification of golden shiner, *Notemigonus crysoleucas*, spotfin shiner, *Notropis spilopterus*, and fathead minnow, *Pimephales promelas*, larvae. *J. Fish. Res. Board Can.* 34:1397-1409.
- Snyder, D. J., and M. S. Peterson. 1999. Life history of a peripheral population of bluespotted sunfish *Enneacanthus gloriosus* (Holbrook), with comments on geographic variation. *Am. Midl. Nat.* 141:345-357.
- Specht, W. L., and M. H. Paller. 2001. Instream biological assessment of NPDES point source discharges at the

- Savannah River Site, 2000. WSRC-TR-2001-00145. Savannah River Technology Center, Aiken, S.C.
- SREL [Savannah River Ecology Laboratory]. 1991. Summary report of Par Pond research. Savannah River Ecology Laboratory, University of Georgia, Aiken, S.C.
- Stacey, P. B., and D. Chiszar. 1978. Body color pattern and the aggressive behavior of male pumpkinseed sunfish (*Lepomis gibbosus*) during the reproductive season. *Behaviour* 64:271-297.
- Stanley, J. G., and D. S. Danie. 1983. Species profiles: life histories and environmental requirements of coastal fishes and invertebrates (North Atlantic). White perch. FWS/OBS-82/11.7. National Coastal Ecosystems Team, Division of Biological Services, U.S. Fish and Wildlife Service, Washington, D.C.
- Stanley, J. G., W. W. Miley, and D. L. Sutton. 1978. Reproductive requirements and likelihood for naturalization of escaped grass carp in the United States. *Trans. Am. Fish. Soc.* 107:119-128.
- Starrett, W. C. 1950. Distribution of the fishes of Boone County, Iowa, with special reference to the minnows and darters. *Am. Midl. Nat.* 43:112-127.
- Starrett, W. C. 1951. Some factors affecting the abundance of minnows in the Des Moines River, Iowa. *Ecology* 32:13-24.
- Sterba, G. 1962. *Freshwater fishes of the world*. Translated from German. Visa Books, London.
- Sterba, G., and D. W. Tucker. 1973. *Freshwater fishes of the world*. English translation and revised edition. TFH Publications, Neptune City, N.J.
- Sternburg, J. G. 1986. Spawning the blackbanded sunfish. *Am. Currents* (January).
- Stevens, R. E. 1958. The striped bass of the Santee-Cooper Reservoir. *Proc. Annu. Conf. Southeast. Assoc. Game Fish Comm.* 11(1957):253-264.
- Stevens, R. E. 1959a. The black and white crappie of the Santee-Cooper Reservoir. *Proc. Annu. Conf. Southeast. Assoc. Game Fish Comm.* 12:158-168.
- Stevens, R. E. 1959b. The white and channel catfishes of the Santee-Cooper Reservoir and Tailrace Sanctuary. *Proc. Annu. Conf. Southeast. Assoc. Game Fish Comm.* 13:203-219.
- Stier, D. J., and J. H. Crance. 1985. Habitat suitability index models and instream flow suitability curves: American shad. *Biol. Rep.* 82:34. U.S. Fish and Wildlife Service, Washington, D.C.
- Stoeckel, J. N., and R. J. Neves. 2000. Methods for hatching margined madtom eggs. *N. Am. J. Aquacult.* 62:42-47.
- Storck, T. W., D. W. Dufford, and K. T. Clement. 1978. The distribution of limnetic fish larvae in a flood control reservoir in central Illinois. *Trans. Am. Fish. Soc.* 107:419-424.
- Street, M. W. 1969. Fecundity of the blueback herring in Georgia. *Contrib. Ser.* 17:15. Georgia Game and Fish Commission, Marine Fisheries Division.
- Street, M. W., and J. G. Adams. 1969. Aging of hickory shad and blueback herring in Georgia by the scale method. *Contrib. Ser.* 18:13. Georgia Game and Fish Commission, Marine Fisheries Division.
- Streever, W. J., and T. L. Crisman. 1993. A comparison of fish populations from natural and constructed freshwater marshes in central Florida. *J. Freshw. Ecol.* 8:149-153.
- Sublette, J. E., M. D. Hatch, and M. Sublette. 1990. *The fishes of New Mexico*. University of New Mexico Press, Albuquerque.
- Sulak, K. J. 1975. Cleaning behavior in the centrarchid fishes, *Lepomis macrochirus* and *Micropterus salmoides*. *Anim. Behav.* 23:331-334.
- Sutherland, A. B., J. L. Meyer, and E. P. Gardiner. 2002. Effects of land cover on sediment regime and fish assemblage structure in four southern Appalachian streams. *Freshw. Biol.* 47:1791-1805.
- Suttkus, R. D. 1956. First record of the mountain mullet, *Agonostomus monticola* (Bancroft), in Louisiana. *Proc. La. Acad. Sci.* 19:43-46.
- Suttkus, R. D. 1963. Order Lepisosteii. Pages 61-88 in *Fishes of the western North Atlantic*. Sears Foundation for Marine Research, Yale University, Mem. 3, pt. 1.
- Suttkus, R. D., and M. F. Mettee. 2001. Analysis of four species of *Notropis* included in the subgenus *Pteronotropis* Fowler, with comments on relationships, origin, and dispersion. *Geol. Surv. Bull.* 170:1-50.
- Suttkus, R. D., B. A. Porter, and B. J. Freeman. 2003. The status and infraspecific variation of *Notropis stonoi*, Fowler. *Proc. Am. Philos. Soc.* 147(4):354-376.
- Suttkus, R. D., and J. S. Ramsey. 1967. *Percina aurolineata*, a new percid fish from the Alabama River system and a discussion of ecology, distribution, and hybridization of darters of the subgenus *Hadropterus*. *Tulane Stud. Zool. Bot.* 28:1-24.
- Sutton, D. L. 1977. Grass carp (*Ctenopharyngodon idella* Val.) in North America. *Aquat. Bot.* 3:157-164.
- Swee, V. B., and H. R. McCrimmon. 1966. Reproductive biology of carp, *Cyprinus carpio* L., in Lake St. Lawrence, Ontario. *Trans. Am. Fish. Soc.* 95:372-380.
- Swift, C. C., C. R. Gilbert, S. A. Bortone, G. H. Burgess, and R. W. Yerger. 1986. Zoogeography of the freshwater fishes of the southeastern United States: Savannah River to Lake Pontchartrain. Pages 213-266 in C. H. Hocutt and E. O. Wiley, editors. *The zoogeography of North American freshwater fishes*. John Wiley and Sons, New York.
- Swift, C., R. W. Yerger, and P. R. Parrish. 1977. Distribution and natural history of the fresh and brackish water fishes

- of the Ochlockonee River, Florida and Georgia. Bull. Tall Timbers Res. Stn. 20.
- Taber, C. A. 1969. Distribution and identification of larval fish in the Buncombe Creek Arm of Lake Texoma with observations on spawning habits and relative abundance. Doctoral dissertation, University of Oklahoma, Norman.
- Taborsky, M. 1994. Sneakers, satellites, and helpers: parasitic and cooperative behavior in fish reproduction. Adv. Stud. Behav. 23:1-100.
- Taubert, B. D. 1977. Early morphological development of the green sunfish, *Lepomis cyanellus*, and its separation from other larval *Lepomis* species. Trans. Am. Fish. Soc. 106(5):445-448.
- Taylor, B. E., J. M. Aho, D. L. Mahoney, and R. A. Estes. 1991. Population dynamics and food habits of bluegill (*Lepomis macrochirus*) in a thermally stressed reservoir. Can. J. Fish. Aquat. Sci. 48(5):768-775.
- Tharratt, R. C. 1959. Food of yellow perch, *Perca flavescens* (Mitchill), in Saginaw Bay, Lake Huron. Trans. Am. Fish. Soc. 88:330-331.
- Thomas, M. E., A. G. Eversole, and D. W. Cooke. 1992. Impacts of water redirection on the spawning utilization on a formerly impounded ricefield by blueback herring. Wetlands 12:22-27.
- Thomason, C. S., D. E. Allen, and J. S. Crane. 1993. A fisheries study of the Edisto River, SC. Study completion report, Federal Aid Projects F-32 and F-30. South Carolina Wildlife and Marine Resources Department, Columbia.
- Thomson, J. M. 1978. *Agonostomas monticola* (Bancroft, 1836). In W. Fischer, editor. FAO species identification sheets for fishery purposes, western central Atlantic (fishing area 31), volume 3.
- Thorp, J. H., L. D. Goldsmith, J. A. Polgreen, and L. M. Mayer. 1989. Foraging patterns of nesting and nonnesting sunfish (Centrarchidae: *Lepomis auritus* and *L. gibbosus*). Can. J. Fish. Aquat. Sci. 46:1342-1346.
- Thorpe, J. E. 1977. Morphology, physiology, behavior, and ecology of *Perca fluviatilis* L. and *Perca flavescens* (Mitchill). J. Fish. Res. Board Can. 34:1504-1514.
- Tin, H. T. 1982. Family Centrarchidae, sunfishes. Pages 524-580 in N. A. Auer, editor. Identification of larval fishes of the Great Lakes basin with emphasis on the Lake Michigan drainage. Spec. Pub. 82-3. Great Lakes Fishery Commission, Ann Arbor, Mich.
- Todd, J. H., J. Atema, and J. E. Bardach. 1967. Chemical communications in social behavior of a fish, the yellow bullhead. Science 158:672-673.
- Todd, T. N. 1986. Occurrence of white bass-white perch hybrids in Lake Erie. Copeia 1986:196-199.
- Toetz, D. W. 1966. The change from endogenous to exogenous sources of energy in bluegill sunfish larvae. Invest. Ind. Lakes Streams 7:115-146.
- Trautman, M. B. 1957. Fishes of Ohio. Ohio State University Press, Columbus.
- Trautman, M. B. 1981. The fishes of Ohio with illustrated keys, revised edition. Ohio State University Press, Columbus.
- Trautman, M. B., and D. K. Gartman. 1974. Re-evaluation of the effects of man-made modifications on Gordon Creek between 1887 and 1973 and especially as regards its fish fauna. Ohio J. Sci. 74:162-173.
- Travnichek, V. H., M. J. Maceina, S. M. Smith, and R. A. Dunham. 1996. Natural hybridization between black and white crappies (*Pomoxis*) in 10 Alabama reservoirs. Am. Midl. Nat. 135:310-316.
- Travnichek, V. H., M. J. Maceina, M. C. Wooten, and R. A. Dunham. 1997. Symmetrical hybridization between black crappie and white crappie in an Alabama reservoir based on analysis of the cytochrome-b gene. Trans. Am. Fish. Soc. 126:127-132.
- Trexler, J. C. 1995. Restoration of the Kissimmee River: a conceptual model of past and present fish communities and its consequences for evaluating restoration success. Restor. Ecol. 3:195-210.
- Tsai, C. 1972. Life history of the eastern Johnny darter, *Etheostoma olmstedi* Storer, in cold tailwater and sewage-polluted water. Trans. Am. Fish. Soc. 101:80-88.
- Tsai, C., and E. C. Rainey. 1974. Systematics of the banded darter, *Etheostoma zonale* (Pisces: Percidae). Copeia 1974(1):1-24.
- Turner, P. R., and R. C. Summerfelt. 1970. Food habits of adult flathead catfish, *Pylodictus olivaris* (Rafinesque), in Oklahoma reservoirs. Proc. Annu. Conf. Southeast. Assoc. Game Fish Comm. 24:387-401.
- Turner, T. F., J. C. Trexler, G. L. Miller, and K. E. Toyer. 1994. Temporal and spatial dynamics of larval and juvenile fish abundance in a temperate floodplain river. Copeia 1994:174-183.
- Turner, W. R., and G. N. Johnson. 1973. Distribution and relative abundance of fishes in Newport River, North Carolina. NOAA Tech. Rep. NMFS-SSRF-666. National Marine Fisheries Service, Beaufort, N.C.
- Tyler, J. D., J. R. Webb, T. R. Wright, J. D. Hargett, K. J. Mask, and D. R. Schucker. 1994. Food habits, sex ratios, and size of longnose gar in southwestern Oklahoma. Proc. Okla. Acad. Sci. 74:41-42.
- Ulrich, G., N. Chipley, J. W. McCord, D. Cupka, J. L. Music Jr., and R. K. Mahood. 1978. Development of fishery management plans for selected anadromous fishes in South Carolina and Georgia. Spec. Pub. 14. Marine Resources Center, South Carolina Wildlife and Marine Resources Department, Columbia.

- Underhill, A. H. 1949. Studies on the development, growth and maturity of the chain pickerel, *Esox niger* (Lesueur). J. Wildl. Manage. 13:377-391.
- U.S. Army Corps of Engineers. 1987. Design and construction report: Steel Creek Dam, Savannah River Operations Office, Department of Energy, Aiken, South Carolina, vol. 1. U.S. Army Corps of Engineers, Savannah District, Savannah, Ga.
- U.S. Fish and Wildlife Service. 2001. New Savannah Bluff Lock and Dam: benefits of restoring natural river flow. Georgia and South Carolina Ecological Services Fact Sheet.
- Vadas, R. L. 1990. The importance of omnivory and predator regulation of prey in freshwater fish assemblages of North America. Environ. Biol. Fishes 27:285-302.
- Van Den Avyle, M. J. 1982. Species profiles: life histories and environmental requirements of coastal fishes and invertebrates (south Atlantic)—American eel. FWS/OBS-82/11.24, U.S. Fish and Wildlife Service; TR EL-82-4, U.S. Army Corps of Engineers.
- VanderKooy, K. E., C. F. Rakocinski, and R. W. Heard. 2000. Trophic relationships of three sunfishes (*Lepomis* spp.) in an estuarine bayou. Estuaries 23(5):621-632.
- Van Eenennaam, J. P., S. I. Doroshov, G. P. Moberg, J. W. Watson, D. S. Moore, and J. Linares. 1996. Reproductive condition of the Atlantic sturgeon (*Acipenser oxyrinchus*) in the Hudson River. Estuaries 19:769-777.
- Vanicek, D. 1961. Life history of the quillback and highfin carpsuckers in the Des Moines River. Proc. Iowa Acad. Sci. 68:238-246.
- Van Olst, J. C., and J. M. Carlberg. 1990. Commercial culture of hybrid striped bass: status and potential. Aquacult. Mag. 1990(1):49-59.
- Van Winkle, W., P. Anders, D. H. Secor, and D. Dixon. 2002. Biology, management, and protection of North American sturgeon. Amer. Fish. Soc. Symp. 28.
- Verma, P. 1970. Normal stages in the development of *Cyprinus carpio* Var., *communis* L. Acta Biol. Acad. Sci. Hung. 21:207-218.
- Vernon, E. H., and R. G. McMynn. 1957. Scale characteristics of yearling coastal cutthroat trout and steelhead trout. J. Fish. Res. Board Can. 14:203-212.
- Vives, S. P. 1990. Nesting ecology of hornyhead chub *Nocomis biguttatus*, a keystone species in Allequash Creek, Wisconsin. Am. Midl. Nat. 124:46-56.
- Vladykov, V. D. 1955. A comparison of the Atlantic sea sturgeon with a new subspecies from the Gulf of Mexico (*Acipenser oxyrinchus desotai*). J. Fish. Res. Board Can. 12:754-761.
- Vladykov, V. D. 1964. Quest for the true breeding area of the American eel (*Anguilla rostrata* Lesueur). J. Fish. Res. Board Can. 21:1523-1530.
- Vladykov, V. D., and J. R. Greeley. 1963. Order Acipenseroidi. Pages 24-60 in Fishes of the western north Atlantic. Sears Foundation for Marine Research, Mem. 1, pt. 3.
- Wagner, C. C., and E. L. Cooper. 1963. Population density, growth, and fecundity of the creek chubsucker, *Erimyzon oblongus*. Copeia 1963:350-357.
- Walburg, C. H. 1975. Food of young-of-year channel catfish in Lewis and Clark Lake, a Missouri River reservoir. Am. Midl. Nat. 93:218-221.
- Waldrip, L. 1992. Grass carp increasing in Trinity River. Texas Parks and Wildlife Department, 20 November 1992, 5-7.
- Wales, J. H. 1941. Development of steelhead trout eggs. Calif. Fish Game 27:250-260.
- Wallace, C. R. 1972. Spawning behavior of *Ictalurus natalis* (LeSueur). Tex. J. Sci. 24:307-310.
- Wallin, J. E. 1989. Bluehead chub (*Nocomis leptocephalus*) nests used by yellowfin shiners (*Notropis lutipinnis*). Copeia 1989(4):1077-1080.
- Wallin, J. E. 1992. The symbiotic nest association of yellowfin shiners, *Notropis lutipinnis*, and bluehead chubs, *Nocomis leptocephalus*. Environ. Biol. Fishes 33:287-292.
- Walsh, S. J., and B. M. Burr. 1984. Life history of the banded pygmy sunfish, *Elassoma zonatum* (Jordan) (Pisces: Centrarchidae), in western Kentucky. Bull. Ala. Mus. Nat. Hist. 8:31-52.
- Walters, D. M., and B. J. Freeman. 2000. Distribution of *Gambusia* (Poeciliidae) in a southeastern river system and the use of fin ray counts for species determination. Copeia 2000:555-559.
- Wang, J. C. S., and R. J. Kernehan. 1979. Fishes of the Delaware estuaries: a guide to the early life histories. Ecological Analysts, Towson, Md.
- Ward, H. C., and E. M. Leonard. 1954. Order of appearance of scales in the black crappie, *Poxomis nigromaculatus*. Proc. Okla. Acad. Sci. 33:138-140.
- Warren, M. L. Jr. 1992. Variation of the spotted sunfish, *Lepomis punctatus* complex (Centrarchidae): meristics, morphometrics, pigmentation, and species limits. Ala. Mus. Nat. Hist. Bull. 12. University of Alabama, Tuscaloosa.
- Warren, M. L. Jr., P. L. Angermeier, B. M. Burr, and W. R. Haag. 1997. Decline of a diverse fish fauna: patterns of imperilment and protection in the southeastern United States. Pages 105-164 in G. W. Benz and D. E. Collins, editors. Aquatic fauna in peril: the southeastern perspective. Spec. Pub. 1. Southeast Aquatic Research Institute, Decatur, Ga.
- Warren, M. L. Jr., and B. M. Burr. 1994. Status of freshwater fishes of the United States: overview of an imperiled fauna. Fisheries 19:6-17.

- Warren, M. L. Jr., B. M. Burr, and C. A. Taylor. 1991. Aspects of reproduction in a captive population of the state threatened ironcolor shiner (*Notropis chalybaeus*). Final report submitted to Division of Natural Heritage, Illinois Department of Natural History.
- Warren, M. L. Jr., and 11 authors. 2000. Diversity, distribution, and conservation status of the native freshwater fishes of the southern United States. *Fisheries* 25:7-31.
- Waters, T. F. 1995. Sediment in streams: sources, biological effects, and controls. *Am. Fish. Soc. Monogr.* 7.
- Weaver, L. A., and G. C. Garman. 1994. Urbanization of a watershed and historical changes in stream fish assemblage. *Trans. Am. Fish. Soc.* 123:162-172.
- Webb, J. F., and D. D. Moss. 1968. Spawning behavior and age and growth of white bass in Center Hill Reservoir, Tennessee. *Proc. Annu. Conf. Southeast. Assoc. Game Fish Comm.* 21:343-357.
- Webb, M. A., H. S. Elder, and R. G. Howells. 1994. Grass carp reproduction in the lower Trinity River, Texas. Pages 29-32 in *Proceedings of the Grass Carp Symposium*, 7-9 March 1994, Gainesville, Fla. U.S. Army Corps of Engineers, Waterways Experiment Station, Vicksburg, Miss.
- Webster, D. A. 1942. The life histories of some Connecticut fishes. Pages 122-227 in L. Thorpe, editor. *A fishery survey of important Connecticut lakes*. *Bull. Conn. Geol. Nat. Hist. Surv.* 63.
- Weller, R. R., and C. Robbins. 1999. Food habits of flathead catfish in the Altamaha River system, Georgia. *Proc. Annu. Conf. Southeast. Assoc. Fish Wildl. Agencies* 53:35-41.
- Weller, R. R., and J. D. Winter. 2001. Seasonal variation in home range size and habitat use of flathead catfish in Buffalo Springs Lake, Texas. *N. Am. J. Fish. Manage.* 21:792-800.
- Wells, L., and R. House. 1974. Life history of the spottail shiner (*Notropis hudsonius*) in southeastern Lake Michigan, the Kalamazoo River, and western Lake Erie. *Res. Rep.* 78. Bureau of Sport Fisheries and Wildlife, Washington, D.C.
- Werner, E. E., and D. J. Hall. 1976. Niche shifts in sunfishes: experimental evidence and significance. *Science* 191:404-406.
- Werner, E. E., and D. J. Hall. 1977. Competition and habitat shift in two sunfishes (Centrarchidae). *Ecology* 58:869-876.
- Werner, R. G. 1972. Bluespotted sunfish, *Enneacanthus gloriosus*, in Lake Ontario drainage, New York. *Copeia* 1972:878-879.
- Werner, R. G. 1980. *Freshwater fishes of New York State*. Syracuse University Press, Syracuse, N.Y.
- Whicker, F. W., T. G. Hinton, D. J. Wiquette, and J. Seel. 1993b. Health risks to hypothetical residents of a radioactively contaminated lake bed. Presented at Meeting the Challenge: Environmental Remediation Conference, U.S. Department of Energy, Augusta, Ga., 24-28 October 1993. Savannah River Ecology Laboratory, Aiken, S.C.
- Whicker, F. W., D. J. Niquette, and T. G. Hinton. 1993a. To remediate or not: a case history. Pages 473-485 in *Proceedings of the Health Physics Society of America meeting*, Coeur d'Alene, Ida.
- Whicker, F. W., J. E. Pinder III, J. W. Bowling, J. J. Alberts, and I. L. Brisbin Jr. 1990. Distribution of long-lived radionuclides in an abandoned reactor cooling reservoir. *Ecol. Monogr.* 60:471-496.
- White, D. S., and K. H. Hagg. 1977. Foods and feeding habits of the spotted sucker, *Minytrema melanops* (Rafinesque). *Am. Midl. Nat.* 98:137-146.
- Whitehurst, D. K. 1981. Seasonal movements of fishes in an eastern North Carolina swamp stream. Pages 182-190 in L. A. Krumholz, editor. *The Warm Water Streams Symposium*. South. Div. Am. Fish. Soc. Spec. Pub. 1.
- Whiteside, B. G. 1964. Biology of the white crappie, *Pomoxis annularis*, in Lake Texoma, Oklahoma. Master's thesis, Oklahoma State University, Stillwater.
- Whiteside, B. G., and C. Berkhouse. 1992. Some new collection locations for six fish species. *Tex. J. Sci.* 44:494.
- Whiteside, L. A., and B. M. Burr. 1986. Aspects of the life history of the tadpole madtom, *Noturus gyrinus* (Siluriformes: Ictaluridae), in southern Illinois. *Ohio J. Sci.* 86:153-160.
- Whitworth, W. R. 1969. List of fishes from the Savannah River Plant. Unpublished manuscript, University of Connecticut, Storrs.
- Whitworth, W. R., P. L. Berrien, and W. T. Keller. 1968. Freshwater fishes of Connecticut. *Bull. Conn. Geol. Nat. Hist. Surv.* 101.
- Wigginton, J. D., B. G. Lockaby, and C. C. Trettin. 2000. Soil organic matter formation and sequestration across a forested floodplain chronosequence. *Ecol. Engineer.* 15:141-156.
- Wike, L. D. 1987. An examination of the basis for poor growth performance in the hybrid grass carp. Doctoral dissertation, University of Illinois, Urbana-Champaign.
- Wike, L. D., and 14 authors. 1994. SRS ecology. *Environ. Inf. Doc. WSRC-TR-93-496*. Westinghouse Savannah River Co., Aiken, S.C.
- Wike, L. D., W. L. Specht, II, E. Mackey, M. H. Paller, E. W. Wilde, and A. S. Dicks. 1989. SRS ecology, reactor operations. *Environ. Inf. Doc. WSRC-RP-89-816*, vol. 2. Westinghouse Savannah River Co., Aiken, S.C.
- Wilbur, R. L. 1969. The redear sunfish in Florida. *Fish. Bull.* 5:64. Florida Game and Freshwater Fish Commission, Tallahassee.

- Wilcox, J. F. 1960. Experimental stockings of Rio Grande blue catfish, a subspecies of *Ictalurus furcatus*, in Lake J. B. Thomas, Colorado City Lake, Nasworthy Lake, Lake Abilene, and Lake Trammel. Dingell-Johnson Project F-5-R-7, Job E-2, job completion report. Texas Game and Fish Commission, Austin.
- Wilde, E. W. 1985. Compliance of the Savannah River Plant P-Reactor cooling system with environmental regulations: demonstrations in accordance with sections 316(a) and (b) of the Federal Water Pollution Control Act of 1972. DP-1708. Savannah River Laboratory, E. I. du Pont de Nemours and Co., Aiken, S.C.
- Wilde, E. W., editor and compiler. 1987. Comprehensive cooling water study final report. Volume 7: Ecology of Par Pond. DP-1739-7. E. I. du Pont de Nemours and Co., Aiken, S.C.
- Wilde, E. W., and L. J. Tilly. 1985. Influence of P-Reactor operation on the aquatic ecology of Par Pond: a literature review. DP-1698. Savannah River Laboratory, E. I. du Pont de Nemours and Co., Aiken, S.C.
- Wiley, E. O. 1977. The phylogeny and systematics of the *Fundulus nottii* species group (Teleostei: Cyprinodontidae). Occas. Pap. Mus. Nat. Hist. Univ. Kans. 66:1-31.
- Wiley, M. J., and L. D. Wike. 1986. Energy balances of diploid, triploid, and hybrid grass carp. Trans. Am. Fish. Soc. 115:853-863.
- Williamson, K. L., and P. C. Nelson. 1985. Habitat suitability index models and instream flow suitability curves: gizzard shad. Biol. Rep. 82(10.112). U.S. Fish and Wildlife Service, Washington, D.C.
- Willis D. W., C. P. Paukert, and B. G. Blackwell. 2002. Biology of white bass in eastern South Dakota glacial lakes. N. Am. J. Fish. Manage. 22:627-636.
- Wiltz, J. W. 1981. Savannah River fish population study and impingement prediction for Plant Vogtle, Burke County, Georgia. Report to Georgia Power Co., Atlanta.
- Wiltz, J. W. 1993. A survey of the fishes of Beaverdam Creek and the adjacent Savannah River, Burke County, Georgia. Georgia Power Co., Atlanta.
- Winkelman, D. L. 1993. Growth, lipid use, and behavioral choice in two prey fishes, dollar sunfish (*Lepomis marginatus*) and mosquitofish (*Gambusia holbrooki*), under varying predation pressure. Doctoral dissertation, University of Georgia, Athens.
- Winkelman, D. L. 1996. Reproduction under predatory threat: trade-offs between nest guarding and predator avoidance in male dollar sunfish (*Lepomis marginatus*). Copeia 1996:845-851.
- Winn, H. E. 1958. Observations on the reproductive habits of darters (Pisces-Percidae). Am. Midl. Nat. 59:190-212.
- Woods, L. P., and R. F. Inger. 1957. The cave, spring and swamp fishes of the family Amblyopsidae of central and eastern United States. Am. Midl. Nat. 58:232-256.
- Woodward, R. L., and T. E. Wissing. 1976. Age, growth, and fecundity of the quillback (*Carpionodes cyprinus*) and highfin (*C. velifer*) carpsuckers in an Ohio stream. Trans. Am. Fish. Soc. 195:411-415.
- Woolcott, W. S. 1962. Intraspecific variation in the white perch, *Roccus americanus* (Gmelin). Chesapeake Sci. 3:94-113.
- Wooten, M. C., K. T. Scribner, and M. H. Smith. 1988. Genetic variability and the systematics of *Gambusia* in the southeastern United States. Copeia 1988:283-289.
- Wright, A. H., and A. A. Allen. 1913. The fauna of Ithaca, New York: fishes. Zool. Field Noteb. (Ithaca, N.Y.):4-6.
- WSRC [Westinghouse Savannah River Company]. 1995. SRS geology and hydrology. Environ. Inf. Doc. WSRC-TR-95-0046. Westinghouse Savannah River Co., Aiken, S.C.
- Yeager, B. L., and R. T. Bryant. 1983. Larvae of the long-nose gar, *Lepisosteus osseus*, from the Little River in Tennessee. J. Tenn. Acad. Sci. 58:20-22.
- Yerger, R. W., and K. Relyea. 1968. The flat-headed bullhead (Pisces: Ictaluridae) of the southeastern United States, and a new species of *Ictalurus* from the Gulf Coast. Copeia 1968:361-384.
- Zimmerman, L. C., E. A. Standora, and J. R. Spotila. 1989. Behavioral thermoregulation of largemouth bass (*Micropterus salmoides*): response of naïve fish to the thermal gradient in a nuclear reactor cooling reservoir. J. Therm. Biol. 14(3):123-132.
- Zimpfer, S. P., C. F. Bryan, and C. H. Pennington. 1987. Factors associated with the dynamics of grass carp larvae in the lower Mississippi River Valley. Pages 102-108 in R. D. Hoyt, editor. Proceedings of the Tenth Annual Larval Fish Conference. Am. Fish. Soc. Symp. 2.