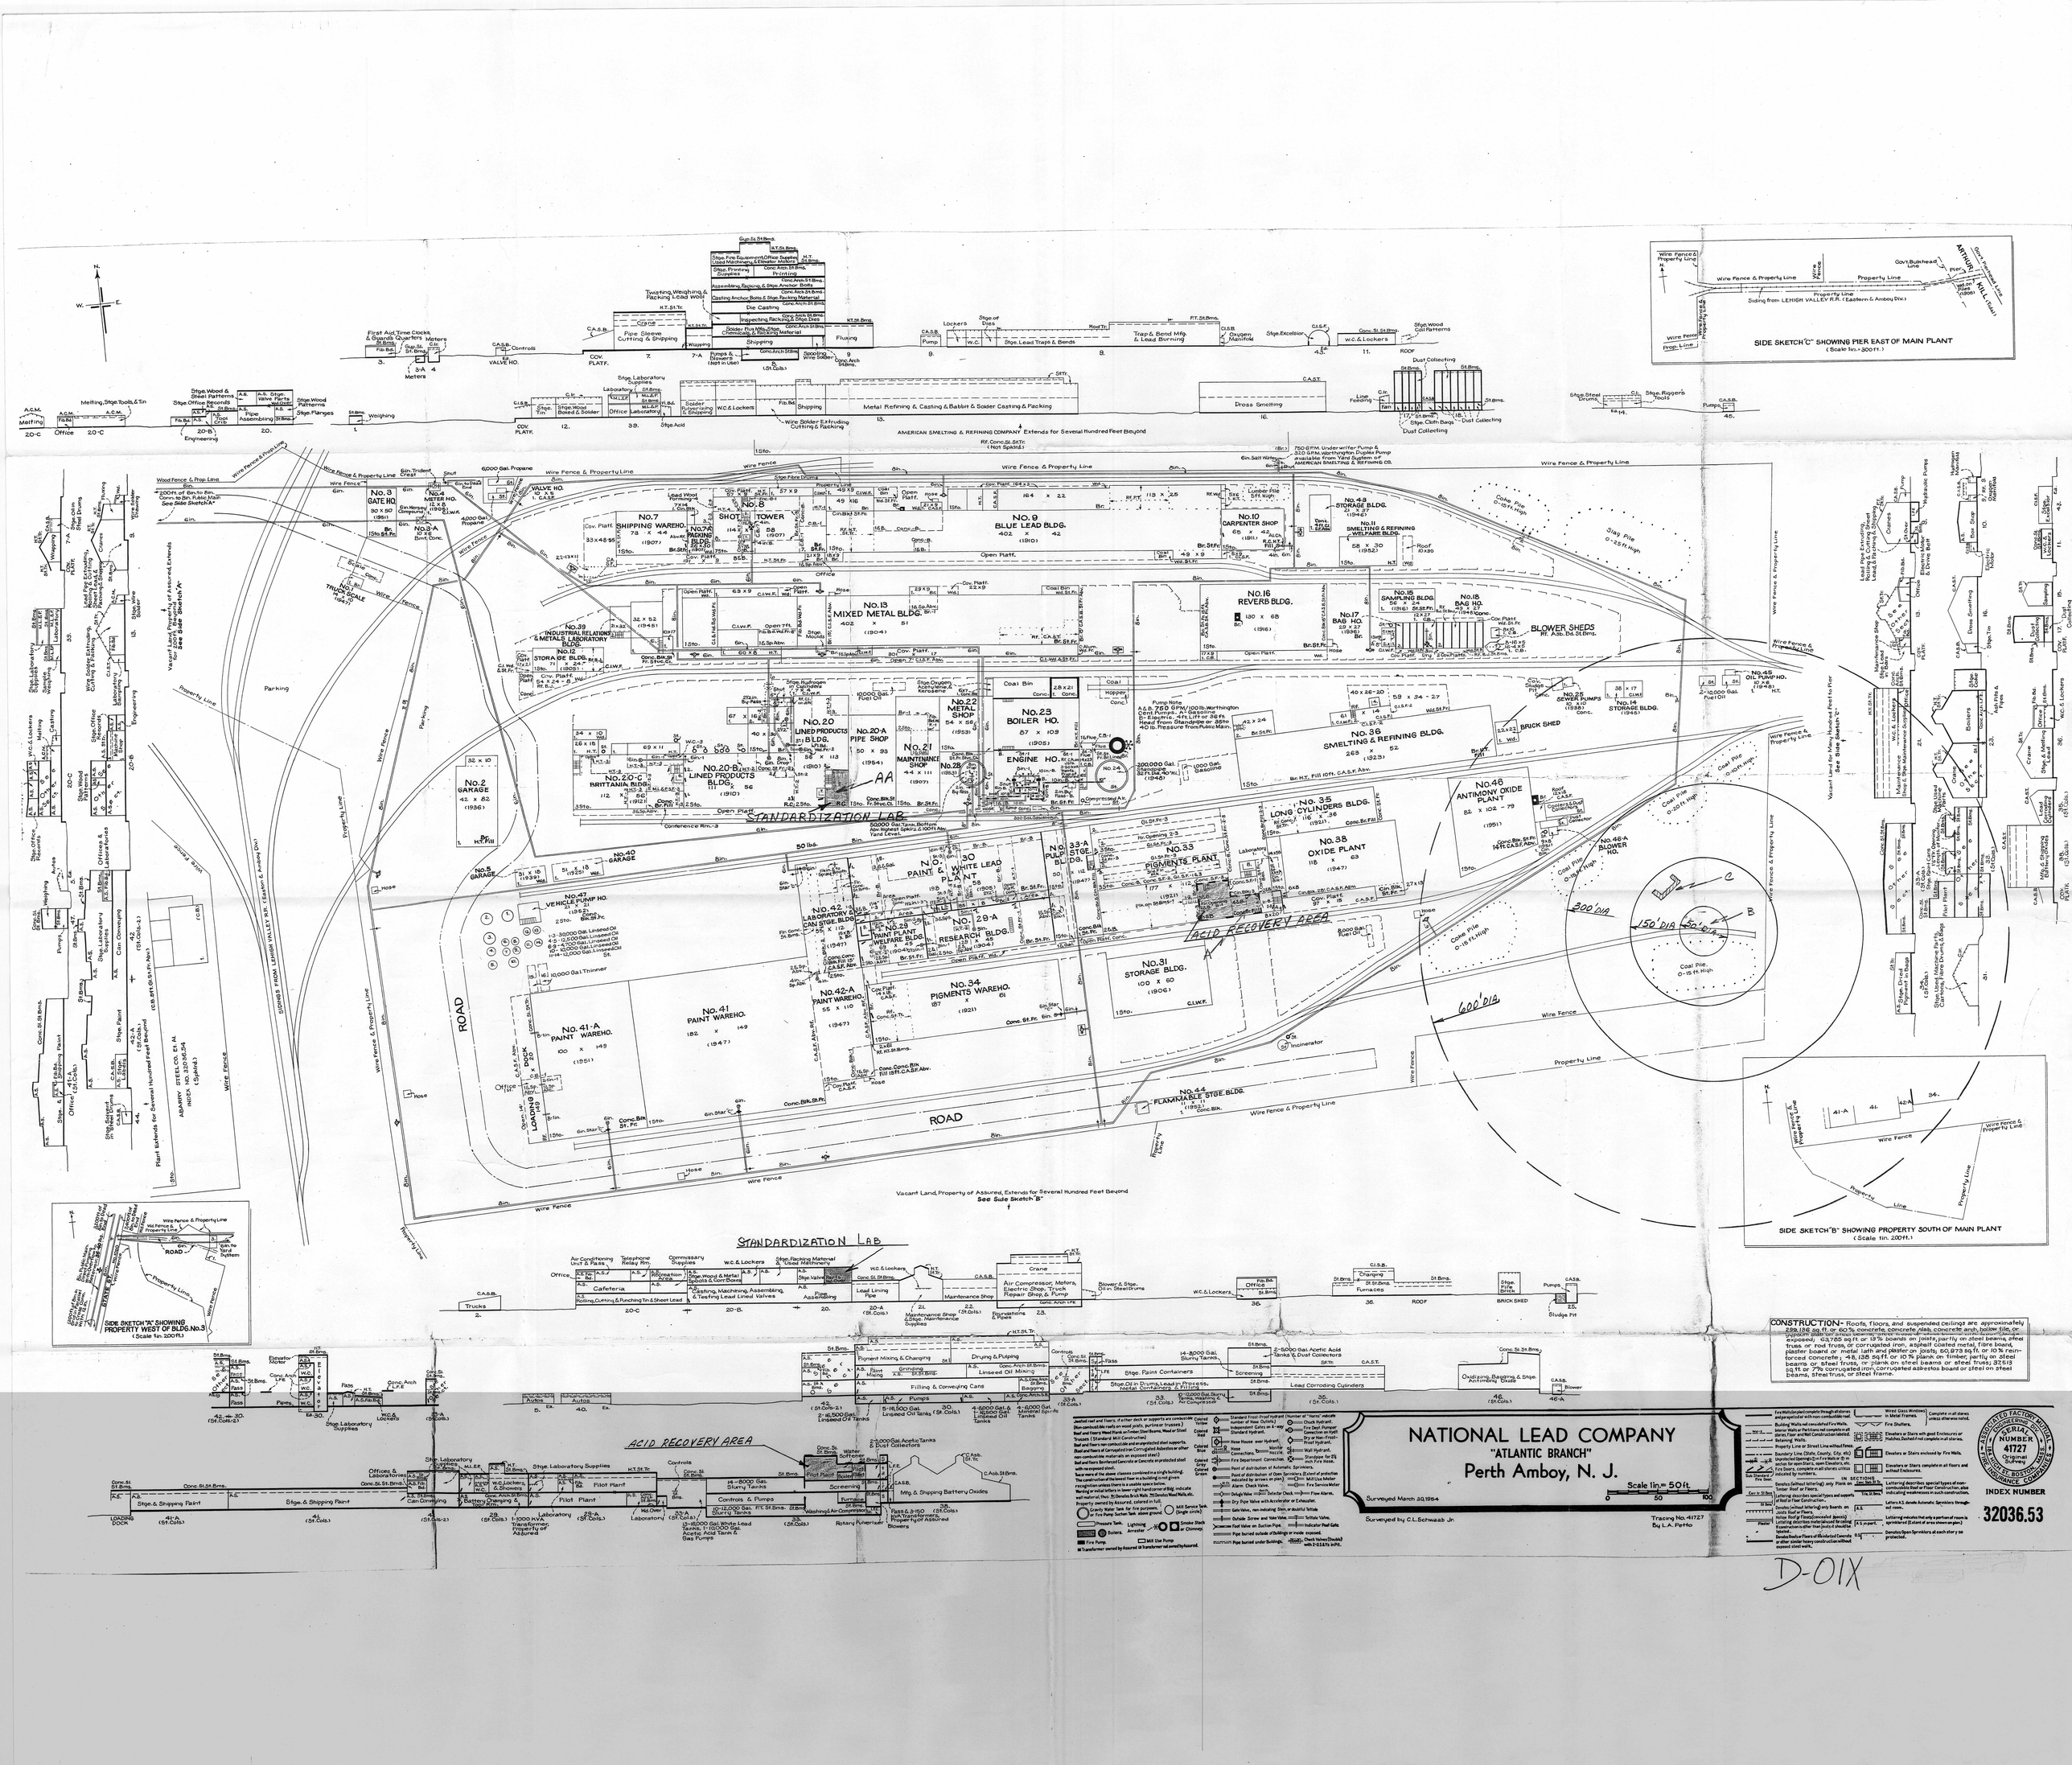

NATIONAL LEAD COMPANY
"ATLANTIC BRANCH"
Perth Amboy, N. J.
Scale in. = 50 ft.
Surveyed March 30, 1954
Surveyed by C.L. Schwab Jr.
Tracing No. 41727
By L.A. Petto
INDEX NUMBER
32036.53
SIDE SKETCH "C" SHOWING PIER EAST OF MAIN PLANT
SIDE SKETCH "B" SHOWING PROPERTY SOUTH OF MAIN PLANT
SIDE SKETCH "A" SHOWING PROPERTY WEST OF BLDG. No. 3
STANDARDIZATION LAB
ACID RECOVERY AREA
ROAD
AMERICAN SMELTING & REFINING COMPANY Extends for Several Hundred Feet Beyond
Vacant Land, Property of Assured, Extends for Several Hundred Feet Beyond See Side Sketch "B"
CONSTRUCTION- Roofs, floors, and suspended ceilings are approximately 239,136 sq. ft. or 60% concrete, concrete slab, concrete arch, hollow tile, or gypsum slabs (or various combinations of these materials); 69,973 sq. ft. or 17% wood (exposed); 63,785 sq. ft. or 16% boards on joists, partly on steel beams, steel truss, or rod truss, or corrugated iron, asphalt coated metal, fibre board, plaster board or metal lath and plaster on joists; 60,973 sq. ft. or 10% reinforced concrete; 48,136 sq. ft. or 10% plank on timber, partly on steel beams or steel truss, or plank on steel beams or steel truss; 32,513 sq. ft. or 7% corrugated iron, corrugated asbestos board or steel on steel beams, steel truss, or steel frame.