

Peripheral Oxide

Utility: Comanche Peak 2

Assembly: JW05

Face: 2

Date: 16-Oct-2003

Elevation	R02	R06	R08	R10	R12	R14
5.1	0.1	2.6	-0.5	-0.5	-2.0	-1.6
6.1	0.0	0.6	-0.6	0.4	-1.2	-2.1
7.1	-0.2	1.2	1.2	0.4	-0.4	-1.2
8.1	0.8	2.8	1.1	0.7	-1.1	-2.1
9.1	0.8	1.8	3.8	1.8	0.0	0.0
10.1	0.2	0.4	1.7	1.5	0.3	-0.7
11.1	0.5	1.9	2.5	1.4	3.4	-0.7
12.1	1.3	0.9	2.1	1.4	1.8	0.1
13.1	0.7	1.1	2.9	1.9	1.6	1.2
14.1	2.6	1.6	3.1	1.9	2.1	2.8
15.1	1.9	1.6	3.0	2.4	2.3	2.1
16.1	3.8	1.3	3.7	2.7	1.6	2.0
17.1	2.6	2.8	4.5	2.4	1.4	1.6
18.1	2.4	2.6	4.4	2.5	1.3	0.5
19.1	3.1	3.0	4.2	3.1	1.8	2.2
20.1	2.2	2.7	4.2	2.8	2.9	2.1
21.1	2.4	2.5	3.2	3.0	2.1	2.4
22.1	3.3	3.8	3.6	2.3	3.7	2.2
23.1	2.6	3.2	3.1	2.7	3.2	2.5
29.5	-0.8	1.6	2.0	2.4	1.2	0.8
30.5	-0.4	1.7	2.7	1.2	2.1	1.1
31.5	-0.1	2.3	2.1	1.8	1.4	2.1
32.5	0.0	1.5	1.9	0.4	1.0	2.1
33.5	0.5	2.3	1.8	0.6	1.5	2.4
34.5	0.8	2.6	1.9	0.7	1.7	2.9
35.5	1.8	2.3	1.8	1.0	2.1	1.4
36.5	1.7	3.5	1.9	2.2	1.6	2.2
37.5	2.4	3.7	2.7	2.5	2.8	1.5
38.5	1.8	3.6	2.4	1.7	2.1	2.4
39.5	2.3	4.1	3.9	2.6	3.0	3.1
40.5	2.2	3.2	3.2	1.5	3.1	1.2
41.5	2.6	3.3	4.7	2.3	3.9	2.4
42.5	3.3	3.7	3.7	2.3	3.6	2.4
43.5	2.8	3.7	3.7	2.4	4.1	3.0
50.1	3.6	3.9	3.4	4.2	2.9	1.1
51.1	3.0	5.3	3.6	3.7	1.6	1.5
52.1	3.9	5.2	3.7	3.8	1.5	0.6
53.1	2.9	4.7	3.5	2.4	1.1	0.6
54.1	4.3	3.1	4.2	2.9	1.7	1.2
55.1	4.2	4.7	3.8	3.1	2.8	1.5


56.1	5.6	6.4	4.5	3.1	2.1	2.2
57.1	4.6	6.8	5.2	2.7	4.4	2.0
58.1	4.2	7.5	6.0	3.2	3.7	2.5
59.1	4.8	7.4	7.0	3.0	4.7	3.7
60.1	4.0	7.5	7.2	3.3	4.0	3.8
61.1	3.9	6.1	7.4	4.0	4.3	3.1
62.1	3.7	7.4	8.9	5.7	5.8	3.0
63.1	4.5	5.8	6.9	5.6	4.9	2.9
64.1	5.2	6.8	6.6	6.4	5.8	3.8
70.7	2.3	5.2	5.3	3.9	2.2	3.2
71.7	2.1	4.4	4.4	3.9	3.4	2.4
72.7	1.6	5.4	3.9	3.5	2.4	2.6
73.7	1.8	5.2	4.9	3.6	1.7	2.3
74.7	1.7	6.3	7.2	5.1	2.2	4.4
75.7	2.5	6.9	7.8	4.9	3.0	3.6
76.7	3.6	7.1	7.2	5.1	2.9	5.1
77.7	4.8	7.3	8.4	5.0	4.9	4.6
78.7	4.8	7.9	8.3	5.9	4.0	5.3
79.7	5.1	7.9	9.1	4.5	6.1	5.1
80.7	4.8	6.8	8.1	4.3	5.3	5.8
81.7	5.5	7.5	8.4	4.6	6.5	5.6
82.7	5.2	7.1	8.3	5.8	7.4	6.0
83.7	5.5	8.3	8.4	4.3	6.8	5.9
84.7	4.8	8.1	8.5	5.5	8.7	5.9
91.2	5.2	6.2	7.4	6.6	5.2	4.2
92.2	5.4	5.9	6.5	5.2	3.5	3.6
93.2	6.4	5.7	7.7	5.8	4.8	4.7
94.2	7.2	6.0	6.3	4.7	3.7	4.7
95.2	6.0	5.7	7.0	4.4	4.7	4.7
96.2	7.4	7.3	7.3	5.9	4.8	4.4
97.2	5.8	9.0	8.3	5.9	4.2	4.5
98.2	6.5	8.8	8.6	6.9	5.5	5.0
99.2	5.9	8.3	9.0	7.9	7.0	5.8
100.2	6.0	7.1	9.3	8.8	5.4	6.0
101.2	6.3	9.3	8.9	8.7	6.2	6.2
102.2	6.3	8.0	8.9	8.7	6.8	7.5
103.2	6.1	9.3	9.1	8.4	6.1	6.1
104.2	6.8	10.0	10.3	8.7	6.2	7.2
105.2	6.7	9.5	9.2	7.9	6.6	6.1
111.8	6.5	6.8	6.0	5.6	5.1	4.4
112.8	4.9	6.1	6.0	4.9	5.3	5.0
113.8	6.0	6.6	5.2	6.0	4.9	5.3
114.8	5.5	6.5	5.7	4.1	4.1	5.4
115.8	4.8	7.0	5.1	4.5	5.2	5.2
116.8	4.2	7.3	5.5	4.5	4.2	5.7
117.8	5.0	7.1	6.0	5.9	4.3	5.2
118.8	5.9	7.5	6.0	6.0	6.2	5.7
119.8	5.6	8.0	6.9	7.1	5.7	5.3

120.8	6.1	7.9	6.9	6.8	7.3	5.2
121.8	6.0	8.5	8.2	7.8	6.0	5.8
122.8	6.2	8.2	8.6	7.8	6.3	5.2
123.8	7.2	9.2	8.7	8.9	7.3	5.8
124.8	7.1	8.8	7.7	9.9	7.2	6.3
125.8	6.8	9.2	7.8	8.6	6.8	7.8

132.3	7.4	7.1	8.6	9.1	7.2	6.8
133.3	7.1	7.2	7.3	8.8	6.0	6.0
134.3	7.5	6.9	6.9	8.6	6.2	6.1
135.3	10.2	7.4	6.7	5.9	4.5	5.6
136.3	8.6	6.9	6.1	5.9	4.8	4.3
137.3	7.4	7.1	6.8	7.2	4.9	4.3
138.3	6.4	6.8	8.1	4.9	4.3	3.9
139.3	7.0	7.6	8.9	4.5	4.8	4.4
140.3	8.4	8.6	7.2	4.4	4.3	5.0
141.3	5.9	7.5	6.7	5.3	5.5	4.5
142.3	5.5	9.2	6.6	5.7	5.6	4.7
143.3	4.8	7.3	6.7	5.3	6.5	3.2
144.3	4.6	7.5	6.8	5.6	5.3	4.1
145.3	5.2	6.2	4.5	4.9	2.8	2.0
146.3	3.6	6.1	4.1	5.0	4.0	2.1

max	10.2	10.0	10.3	9.9	8.7	7.8
-----	------	------	------	-----	-----	-----

### Peripheral Rod Oxide (Com

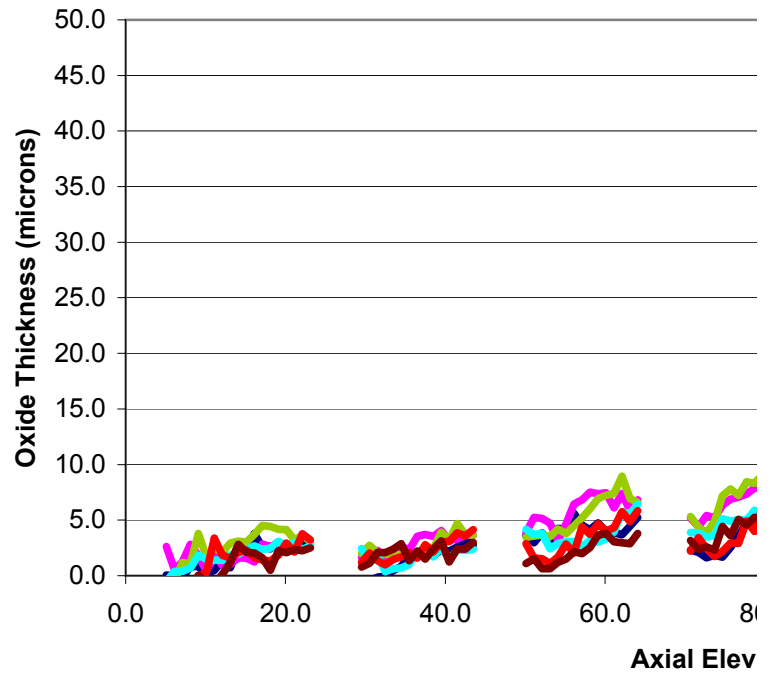


FR2 FR6 FR8





side (Comanche Peak 2, FA JW05, FACE 2)

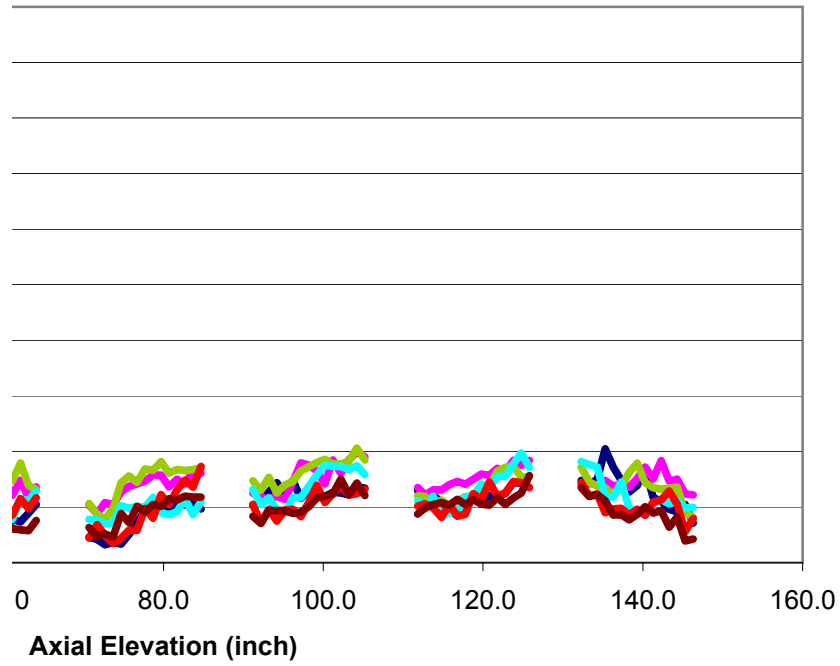

FR8 FR10 FR12 FR14





