

CONTROLLED BY USER

DESIGN FEATURES

5.3 REACTOR CORE

FUEL ASSEMBLIES

5.3.1 The reactor core shall contain 241 fuel assemblies with each fuel assembly containing 236 fuel rods or burnable poison rods clad with Zircaloy-4. Each fuel rod shall have a nominal active fuel length of 150 inches and contain a maximum total weight of approximately 1950 grams uranium. Each burnable poison rod shall have a nominal active poison length of 136 inches. The initial core loading shall have a maximum enrichment of 3.35 weight percent U-235. Reload fuel shall be similar in physical design to the initial core loading and shall have a maximum enrichment of 4 weight percent U-235.

4.65

CONTROL ELEMENT ASSEMBLIES

5.3.2 The reactor core shall contain 76 full-length and 13 part-length control element assemblies.

5.4 REACTOR COOLANT SYSTEM

DESIGN PRESSURE AND TEMPERATURE


5.4.1 The Reactor Coolant System is designed and shall be maintained:

- a. In accordance with the code requirements specified in Section 5.2 of the FSAR with allowance for normal degradation pursuant of the applicable surveillance requirements,
- b. For a pressure of 2500 psia, and
- c. For a temperature of 650°F, except for the pressurizer which is 700°F.

VOLUME

5.4.2 The total water and steam volume of the Reactor Coolant System is 13,900 + 300/-0 cubic feet at a nominal T_{avg} of 593°F.

8709170222 870914
PDR ADDOCK 05000529
P PDR

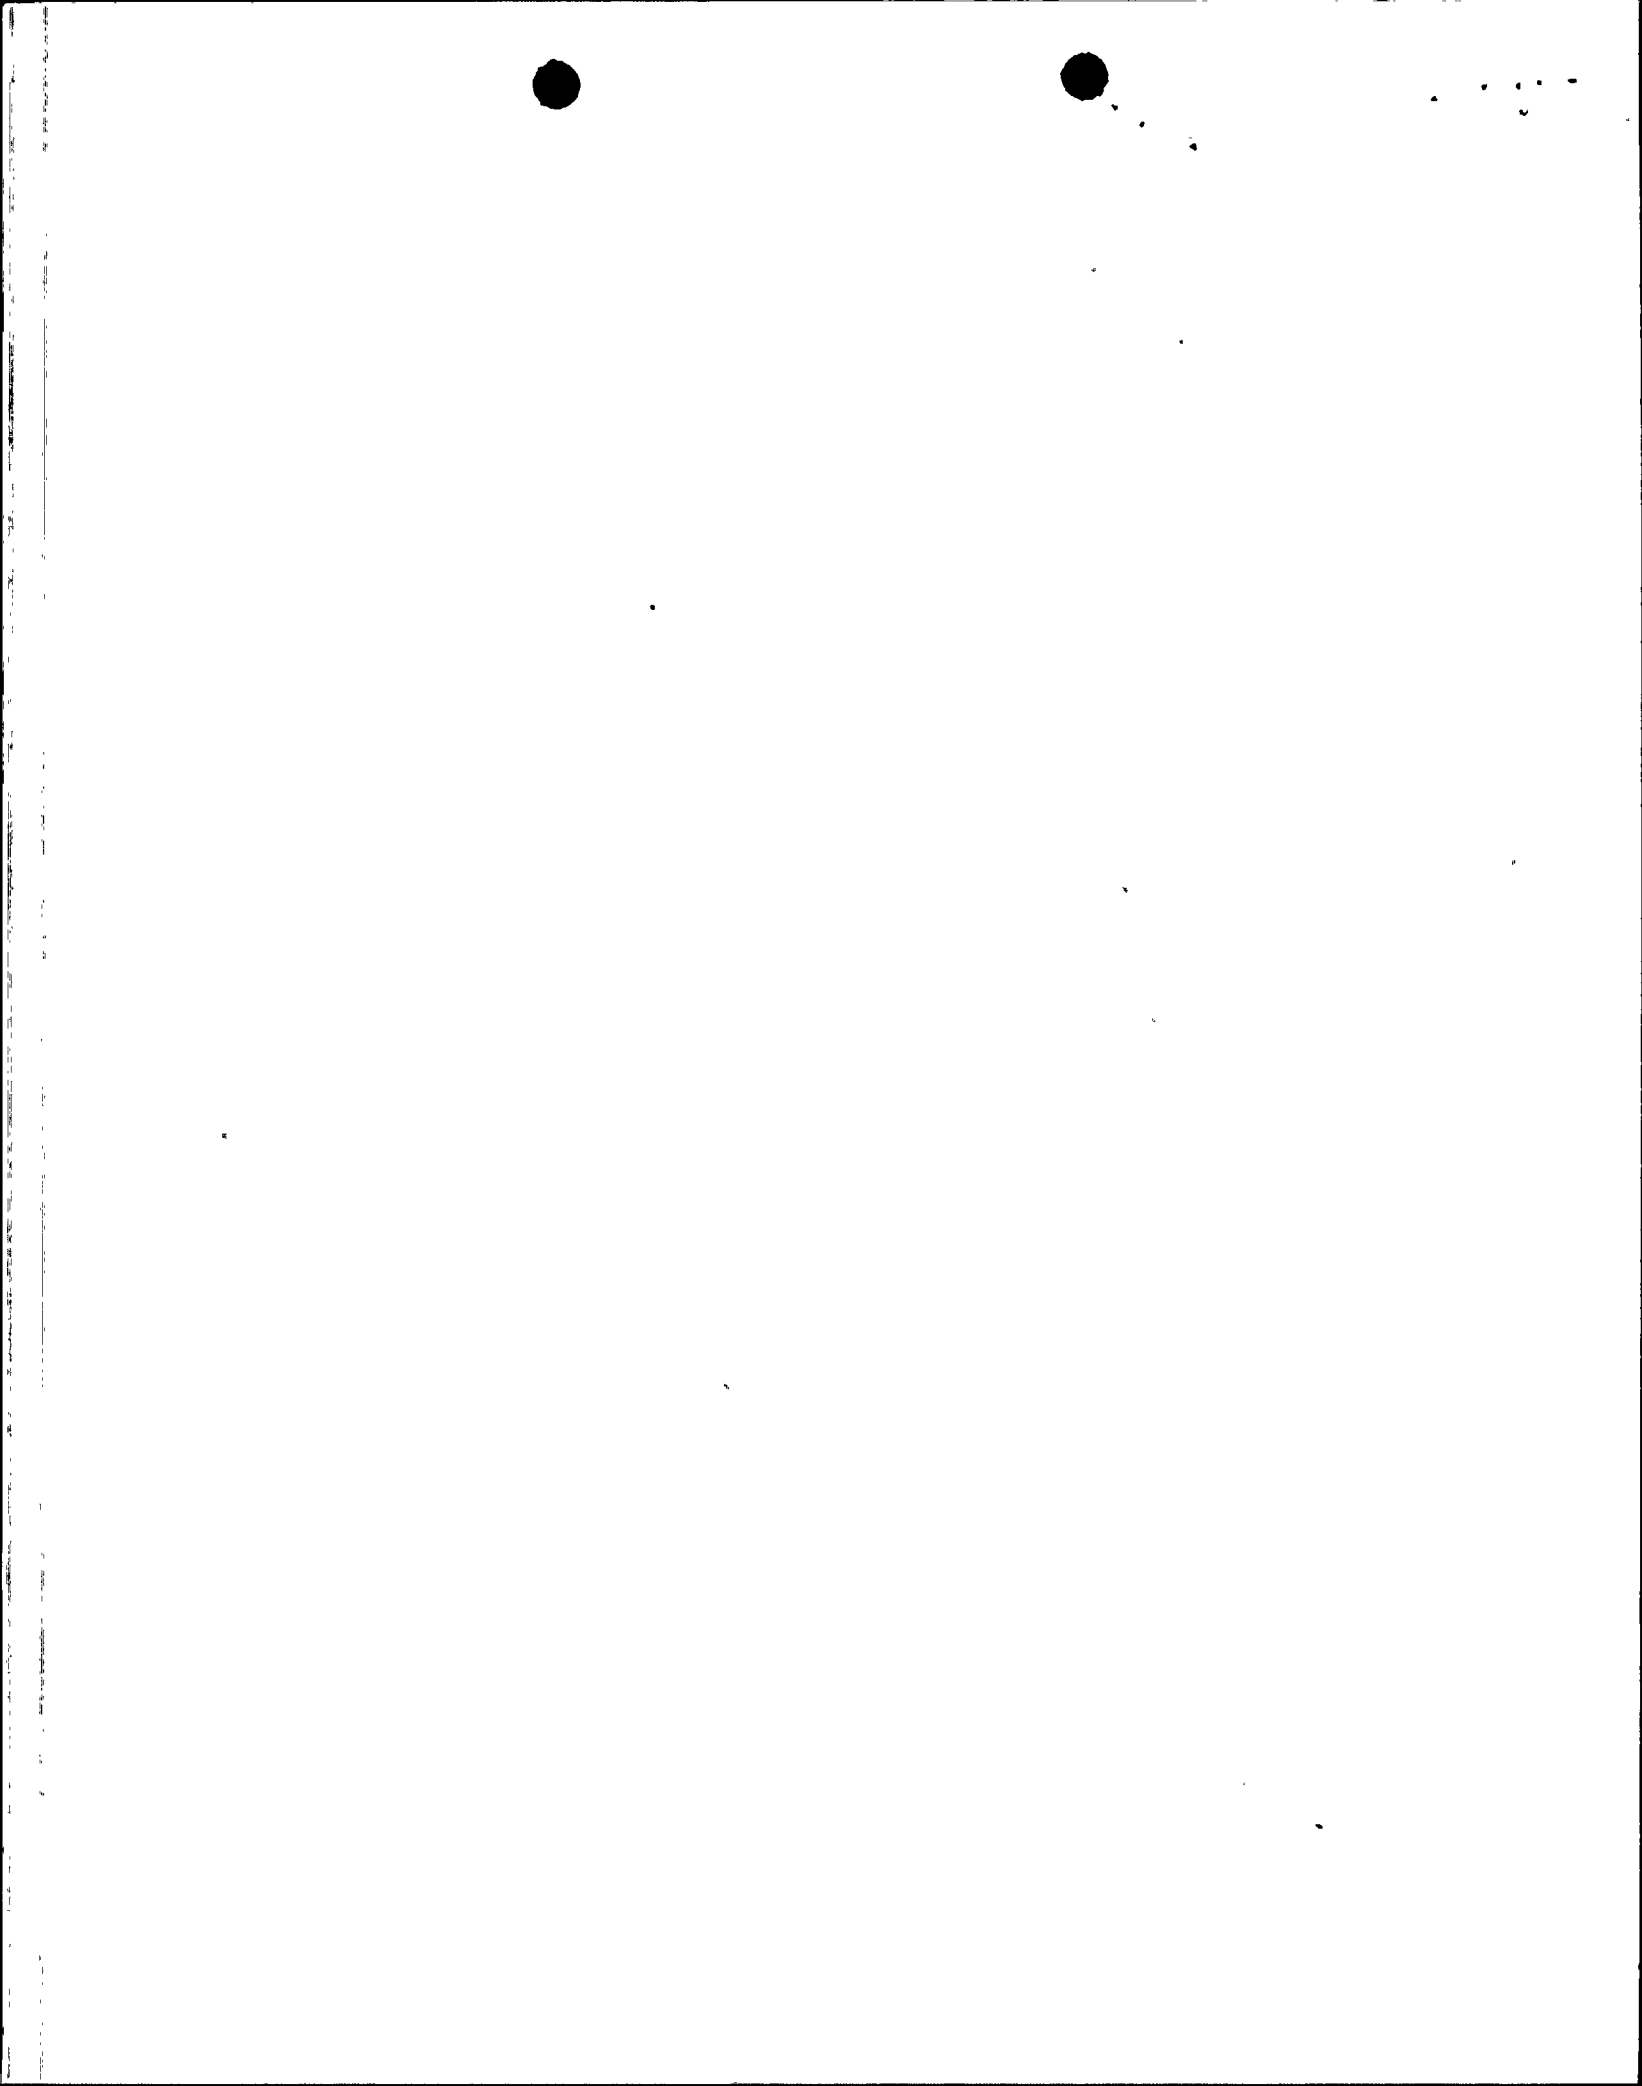

DESIGN FEATURES5.3 REACTOR COREFUEL ASSEMBLIES

5.3.1 The reactor core shall contain 241 fuel assemblies with each fuel assembly containing 236 fuel rods or burnable poison rods clad with Zircaloy-4. Each fuel rod shall have a nominal active fuel length of 150 inches and contain a maximum total weight of approximately 1950 grams uranium. Each burnable poison rod shall have a nominal active poison length of 136 inches. The initial core loading shall have a maximum enrichment of 3.35 weight percent U-235. Reload fuel shall be similar in physical design to the initial core loading and shall have a maximum enrichment of ^{4.05} weight percent U-235.

CONTROL ELEMENT ASSEMBLIES

5.3.2 The reactor core shall contain 76 full-length and 13 part-length control element assemblies.

5.4 REACTOR COOLANT SYSTEMDESIGN PRESSURE AND TEMPERATURE

5.4.1 The Reactor Coolant System is designed and shall be maintained:

- a. In accordance with the code requirements specified in Section 5.2 of the FSAR with allowance for normal degradation pursuant of the applicable surveillance requirements,
- b. For a pressure of 2500 psia, and
- c. For a temperature of 650°F, except for the pressurizer which is 700°F.

VOLUME

5.4.2 The total water and steam volume of the Reactor Coolant System is 13,900 + 300/-0 cubic feet at a nominal T_{avg} of 593°F.

