

September 30, 2005

NRC 2005-0126
10 CFR 50.36

U.S. Nuclear Regulatory Commission
ATTN: Document Control Desk
Washington, DC 20555

Point Beach Nuclear Plant, Unit 1
Docket 50-266
License No. DPR-24


Post Accident Monitoring Instrumentation Report

Point Beach Nuclear Plant (PBNP) Technical Specification (TS) 5.6.6 states, "When a report is required by Condition B or F of LCO 3.3.3, 'Post Accident Monitoring (PAM) Instrumentation,' a report shall be submitted within the following 14 days. The report shall outline the preplanned alternate method of monitoring, the cause of the inoperability, and the plans and schedule for restoring the instrumentation channels of the Function to OPERABLE status."

On August 19, 2005, one required channel of Unit 1 Containment Sump B Water Level PAM instrumentation became inoperable and was not restored within 30 days, necessitating a report per Condition B of LCO 3.3.3. The attachment to this letter contains the required report of this condition.

This letter contains no new commitments and no revisions to existing commitments.

Please contact Jeff Helbing of my staff at (920) 755-6414 with any questions.

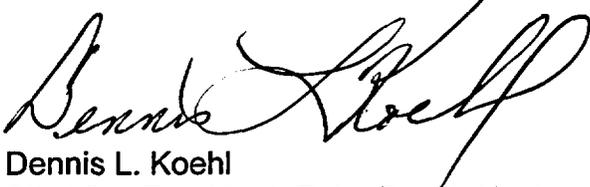

Dennis L. Koehl
Site Vice-President, Point Beach Nuclear Plant
Nuclear Management Company, LLC

Enclosure

cc: Administrator, Region III, USNRC
Project Manager, Point Beach Nuclear Plant, USNRC
Resident Inspector, Point Beach Nuclear Plant, USNRC
PSCW

A001

ENCLOSURE 1

POST ACCIDENT MONITORING INSTRUMENTATION REPORT TECHNICAL SPECIFICATION 5.6.6 POINT BEACH NUCLEAR PLANT, UNIT 1

Background

The primary purpose of the PAM instrumentation is to display unit variables that provide information required by the control room operators during accident situations. This information provides the necessary support for the operator to take the manual actions for which no automatic control is provided and that are required for safety systems to accomplish their safety functions for Design Basis Accidents (DBAs).

The operability of the accident monitoring instrumentation ensures that there is sufficient information available on selected unit parameters to monitor and assess unit status and behavior following an accident. Point Beach Nuclear Plant (PBNP) Technical Specification (TS) LCO 3.3.3 requires two operable channels for most functions. Two operable channels ensure no single failure prevents operators from getting information necessary to determine the safety status of the unit, and to bring the unit to and maintain it in a safe condition following an accident.

Function 8 of TS Table 3.3.3-1 is Containment Sump B Water Level. Containment Sump B Water Level is provided for verification and long term surveillance of RCS integrity.

Containment Sump B Water Level is used to determine:

- containment sump B level accident diagnosis;
- when to begin the recirculation procedure; and
- whether to terminate safety injection (SI), if still in progress.

Condition Description

On August 19, 2005, Unit 1 Containment Sump B Water Level Transmitter 1LT-960 was declared inoperable due to occasional spiking. Troubleshooting and repair attempts were unsuccessful in restoring the transmitter to service. On September 18, 2005, continued inoperability of this channel of PAM instrumentation necessitated a report per Condition B of LCO 3.3.3.

TS 5.6.6 states, "When a report is required by Condition B or F of LCO 3.3.3, 'Post Accident Monitoring (PAM) Instrumentation,' a report shall be submitted within the

following 14 days. The report shall outline the preplanned alternate method of monitoring, the cause of the inoperability, and the plans and schedule for restoring the instrumentation channels of the Function to OPERABLE status.”

Preplanned Alternate Method Of Monitoring

Level transmitters 1LT-960 and 1LT-961 (and their associated instrument loops) are the two channels designated to meet the requirements of function 8 of TS Table 3.3.3-1 for Containment Sump B Water Level. 1LT-961 and its associated instrument loop remain operable and will continue to be used to monitor containment sump B level. 1LT-959 monitors containment sump A water level and provides an overlap capability into the indicating range for 1LI-960 and 1LI-961. Therefore, 1LT-959 could also be used to monitor the lower level portion of sump B.

Cause Of The Inoperability

Containment sump B level indicator, 1LI-960, was observed to take a step jump of greater than 5 inches and appeared to be drifting higher. The indication from 1LI-960 has been erratic; usually indicating 0 inches (normally expected level), followed by short excursions indicating greater than normal level. Troubleshooting efforts indicated that the problem was at the containment penetration. Work was performed to check the cable connection at the exterior of the containment penetration; however, the cable connection on the interior of the containment penetration needs to be checked to identify the fault based on time domain reflectometer results.

Plans And Schedule For Restoration

A work order (WO# 0511279) was prepared to perform the initial troubleshooting. This work order has been added to the Unit 1 fall 2005 refueling outage (U1R29), which was started on September 24, 2005. Unit 1 Containment Sump B Water Level Transmitter 1LT-960 is scheduled for restoration prior to completion of the refueling outage.

Additional Plans

Further troubleshooting of the instrument is planned if no cable fault is identified at the connector on the interior of the containment penetration.