Relevant

(17)

B3

From: Eric Duncan
To: Anne Boland; Bill Bateman; Bruce Boger; Charles Weil; Cynthia Pederson; David Hills; Deborah Jackson; Eric Duncan; Gary Shear; Geoffrey Grant; Geoffrey Wright; George Georgiev; Gregory Cwalina; James Caldwell; James Davis; James Heller; James Wiggins; Jared Heck; Jay Collins; Jim Dyer; John Grobe; John Jandovitz; John Rutkowski; John Tsao; Joseph Petrosino; Mark Satorius; Matthew Mitchell; Melvin Holmberg; Michael Weber; Michele Evans; Patrick Hiland; Richard Smith; Russell Gibbs; Scott Langan; Steven West; Terence Chan; Thomas Wengert; Tom Bilik ; Victor Hall; William Cullen
Date: Fri, Mar 23, 2007 9:53 AM
Subject: Slides from Davis-Besse Call

To all,

Please find attached the slides from yesterday's call with FENOC and Exponent.

Eric.

A-9

Mail Envelope Properties (4603DBAA.2B7 : 4 : 3672)

Subject: Slides from Davis-Besse Call
Creation Date Fri, Mar 23, 2007 9:52 AM
From: Eric Duncan

Created By: ERD@nrc.gov

Recipients
nrc.gov
ATB (Anne Boland)
CDP1 (Cynthia Pederson)
CHW1 (Charles Weil)
DEH (David Hills)
ERD (Eric Duncan)
GCW (Geoffrey Wright)
GEG (Geoffrey Grant)
GLS (Gary Shear)
JER7 (John Rutkowski)
JKH (James Heller)
JLC1 (James Caldwell)
JSJ1 (John Jandovitz)
KSW (Steven West)
MAS (Mark Satorius)
MSH (Melvin Holmberg)
RLS4 (Richard Smith)
SJL1 (Scott Langan)
TXB (Tom Bilik)

nrc.gov
BAB2 (Bruce Boger)
WHB (Bill Bateman)

nrc.gov
GBG (George Georgiev)
JAG (John Grobe)
MGE (Michele Evans)
RAG1 (Russell Gibbs)

nrc.gov
GCC (Gregory Cwalina)
JAD (James Davis)
JED2 (Jim Dyer)
JXC (Jay Collins)

TLC (Terence Chan)
WHC (William Cullen)

nrc.gov
DAJ1 (Deborah Jackson)
JKH3 (Jared Heck)
PLH (Patrick Hiland)
VXH (Victor Hall)

nrc.gov
MAM4 (Matthew Mitchell)

nrc.gov
JCT (John Tsao)

nrc.gov
JJP1 (Joseph Petrosino)

nrc.gov
JTW1 (James Wiggins)
MFW (Michael Weber)
TJW2 (Thomas Wengert)

Post Office	Route
	nrc.gov
	nrc.gov
	nrc.gov
	nrc.gov
	nrc.gov
	nrc.gov
	nrc.gov
	nrc.gov
	nrc.gov

Files	Size	Date & Time
MESSAGE	661	Friday, March 23, 2007 9:52 AM
SummarySlides.ppt	1170432	Friday, March 23, 2007 8:47 AM

Options

Expiration Date:	None
Priority:	Standard
ReplyRequested:	No
Return Notification:	None
Concealed Subject:	No

Security: Standard

Junk Mail Handling Evaluation Results
Message is not eligible for Junk Mail handling
Message is from an internal sender

Junk Mail settings when this message was delivered
Junk Mail handling disabled by User
Junk Mail handling disabled by Administrator
Junk List is not enabled
Junk Mail using personal address books is not enabled
Block List is not enabled

Key Conclusions of Exponent's December 15, 2006 Report:

"Review & Analysis of the Davis-Besse March 2002 Reactor Pressure Vessel Head Wastage Event"

Ron Latanision, Dan Bullen, David Taylor

Exponent *Failure Analysis Associates*

March 22, 2007

BN63097.001 F0T0 0307 DB11

Exponent®

Release able

Principal Conclusion

- Large undercut wastage cavity at CRDM Nozzle 3 developed between October/November 2001 and February 2002
- Basis:
  - Detailed stress analysis of nozzle/weld at Nozzle 3
  - NRC/ANL 2006 crack growth data for actual DB CRDM Nozzle 3 Alloy 600 material
  - Fracture mechanics studies of crack growth
  - Axial nozzle crack leak rate vs. crack length above weld
  - Weld crack leak rate vs. weld crack dimensions
  - Detailed CFD modeling of thermal hydraulic conditions in developing wastage cavity
  - NRC/ANL 2005 data on wetted molten metaboric acid corrosion of low alloy steel
  - Identification of thermal hydraulic conditions leading to rapid metal removal by mechanical jet action and by corrosion due to wetted molten metaboric acid
  - Final wastage cavity morphology
  - Plant operating history

Exponent®

Cracking/Wastage Timeline

- 12RFO – April/May 2000:
  - Nozzle 3 axial crack has grown to about 0.5 inches above and about 0.8 inches below the weld, total length around 2.5 inches
  - The leak rate from the 0.5 inch axial above-weld crack is estimated at 0.0004 gpm
  - Rapid evaporation to dry-out occurs at this leak rate
  - Sub-surface metal removal at a low rate occurs by mechanical erosion with very little annulus enlargement
  - Total boric acid accumulation from the leakage through this crack at 12RFO is estimated at less than 1 cubic inch
  - This boric acid accumulation may have been visible on the RPV head if there had been no boric acid deposits from leaking CRDM flanges
  - Cleaning of CRDM flange leakage boric acid from the RPV head would have removed any deposits from the leaking crack
  - No annulus enlargement would have been visible even if the RPV head had been clean

Exponent®

Cracking/Wastage Timeline (cont'd)

- April/May 2001:
  - Nozzle 3 axial crack has grown to about 1.0 inch above the weld
  - The leak rate from this crack is estimated at 0.01 gpm, similar to the total leakage estimated from all cracks at Nozzle 2 in February 2002
  - Sub-surface metal removal at a low rate by mechanical erosion continues and metal removal has likely caused a wastage cavity to form similar in size to that found at Nozzle 2 in February 2002
  - At this leak rate, moisture penetrates into the bottom of the wastage cavity
  - Metal temperatures remain high enough to result in phase transformation of boric acid to metaboric acid and melting
  - Presence of molten metaboric acid and moisture results in acceleration of metal removal at the bottom of the wastage cavity

Exponent®

Cracking/Wastage Timeline (cont'd)

- May/October 2001:
  - Nozzle 3 axial crack has grown to about 1.1 inches above the weld by October 2001
  - The leak rate from this crack is estimated at 0.02 gpm
  - The upward growing axial nozzle crack and downward growing wastage cavity have intersected
  - Mechanical erosion at the bottom of the wastage cavity increases due to the change in crack jet direction and high velocity jet impingement
  - Moisture penetrates further into the bottom of the wastage cavity due to the higher leak rate
  - Metal temperatures still remain high enough to result in phase transformation of boric acid to metaboric acid and melting
  - Combined action of wetted molten metaboric acid corrosion and mechanical action rapidly removes the 1 inch of remaining low alloy steel covering the weld
  - Undercutting of the wastage cavity likely begins

Exponent®

CRDM Nozzle 3 and Weld Cracking

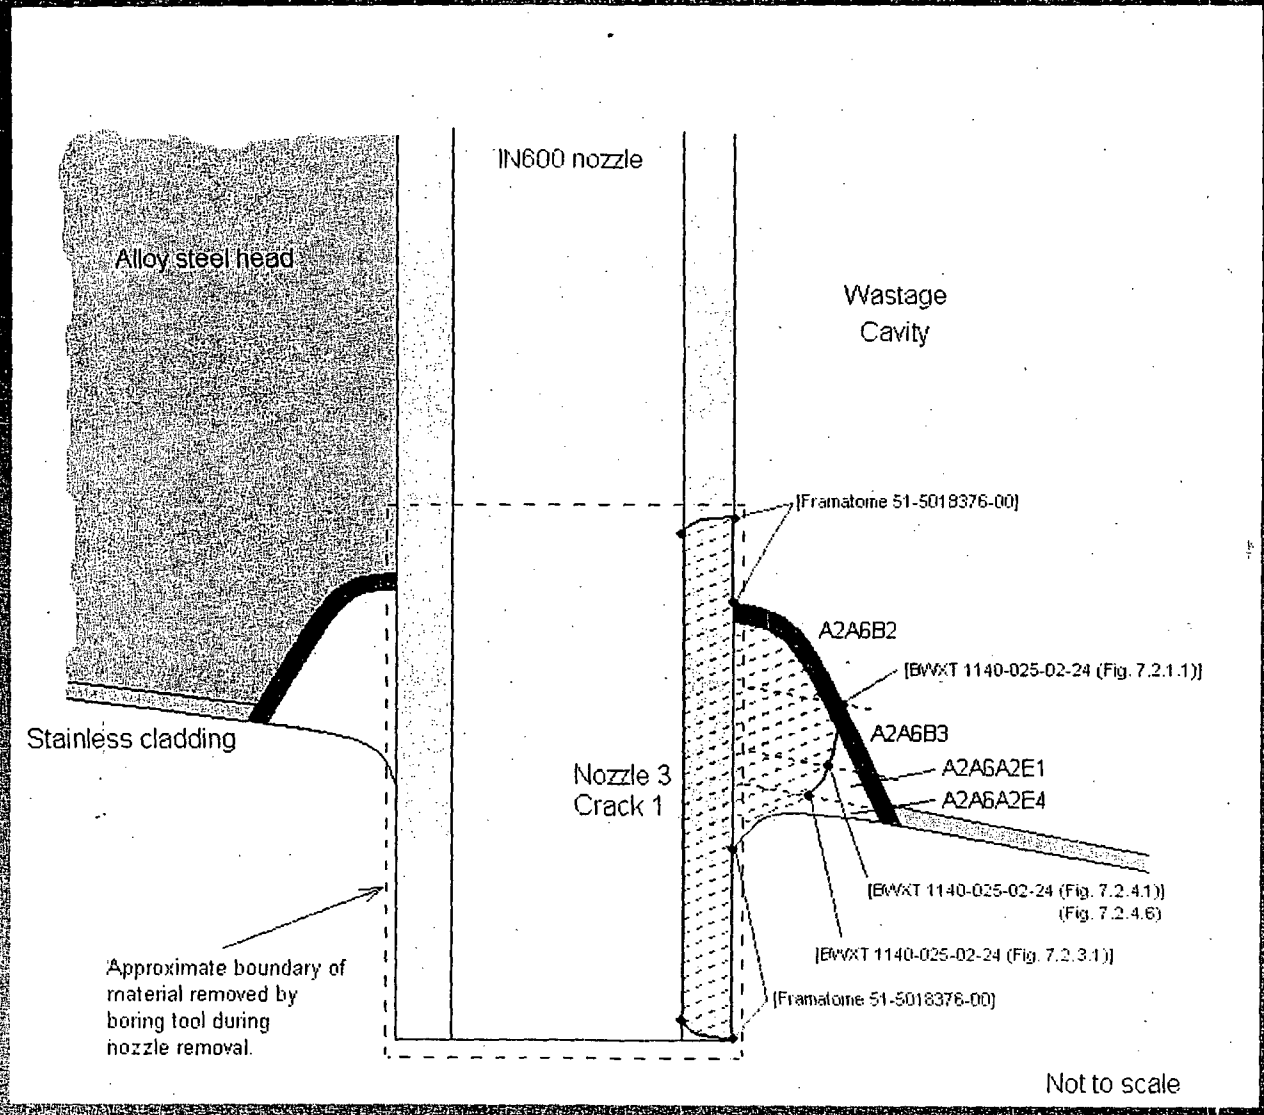

Exponent®

Cracking/Wastage Timeline (cont'd)

- October/November 2001:
  - Large pre-existing weld crack is uncovered by the rapidly downward growing wastage cavity
  - Leak rate increases to around 0.16 gpm
  - Cavity metal wall temperatures remain higher than phase transformation to and melting temperature of metaboric acid
  - High velocity high flow jet impingement and wetted molten metaboric acid corrosion cause rapid wastage cavity growth, undercutting, and large cavity by February 2002
  - Significant moisture penetrates to the RPV head underneath the existing boric acid deposit from CRDM leakage
  - Head surface metal temperature remains high enough to form molten metaboric acid and presence of moisture from higher leak rate results in top-down wastage of RPV alloy steel evident in final wastage cavity morphology

Exponent®

CRDM Nozzle 3 Weld Cracking

- Metallurgical examination of the Nozzle 3 weld revealed a through weld crack
  - Crack extended radially across the weld from the nozzle OD to the RPV head alloy steel
  - Crack was through weld from bottom to top
  - Crack was much wider than the axial crack in Nozzle 3 above the weld

Exponent®

CRDM Nozzle 3 Weld Cracking (cont'd)

- Scanning electron micrograph of CRDM Nozzle 3 crack at 180° location showing typical width of PWSCC nozzle cracks. Maximum crack width is about 20 microns (0.0008 inches)

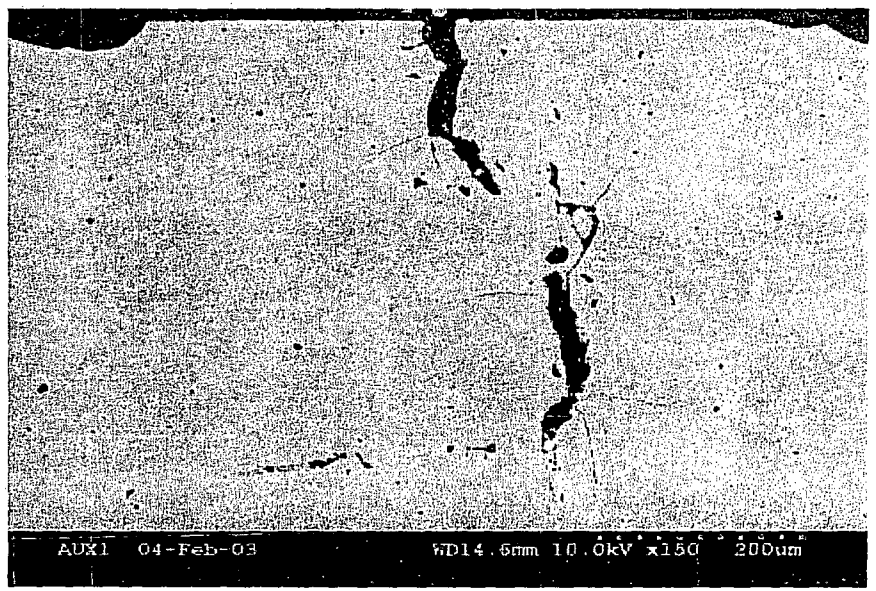

0.01 inch

- Optical micrograph of J-groove weld crack in CRDM Nozzle 3 at 10° location. Nominal crack width is about 400 microns (0.016 inches), about 20 times larger than the PWSCC crack in the same nozzle

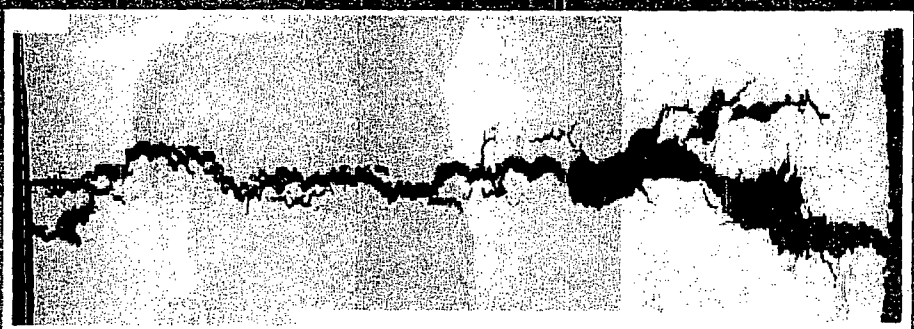

0.20 inch

Exponent®

Final Wastage Cavity at CRDM Nozzle 3

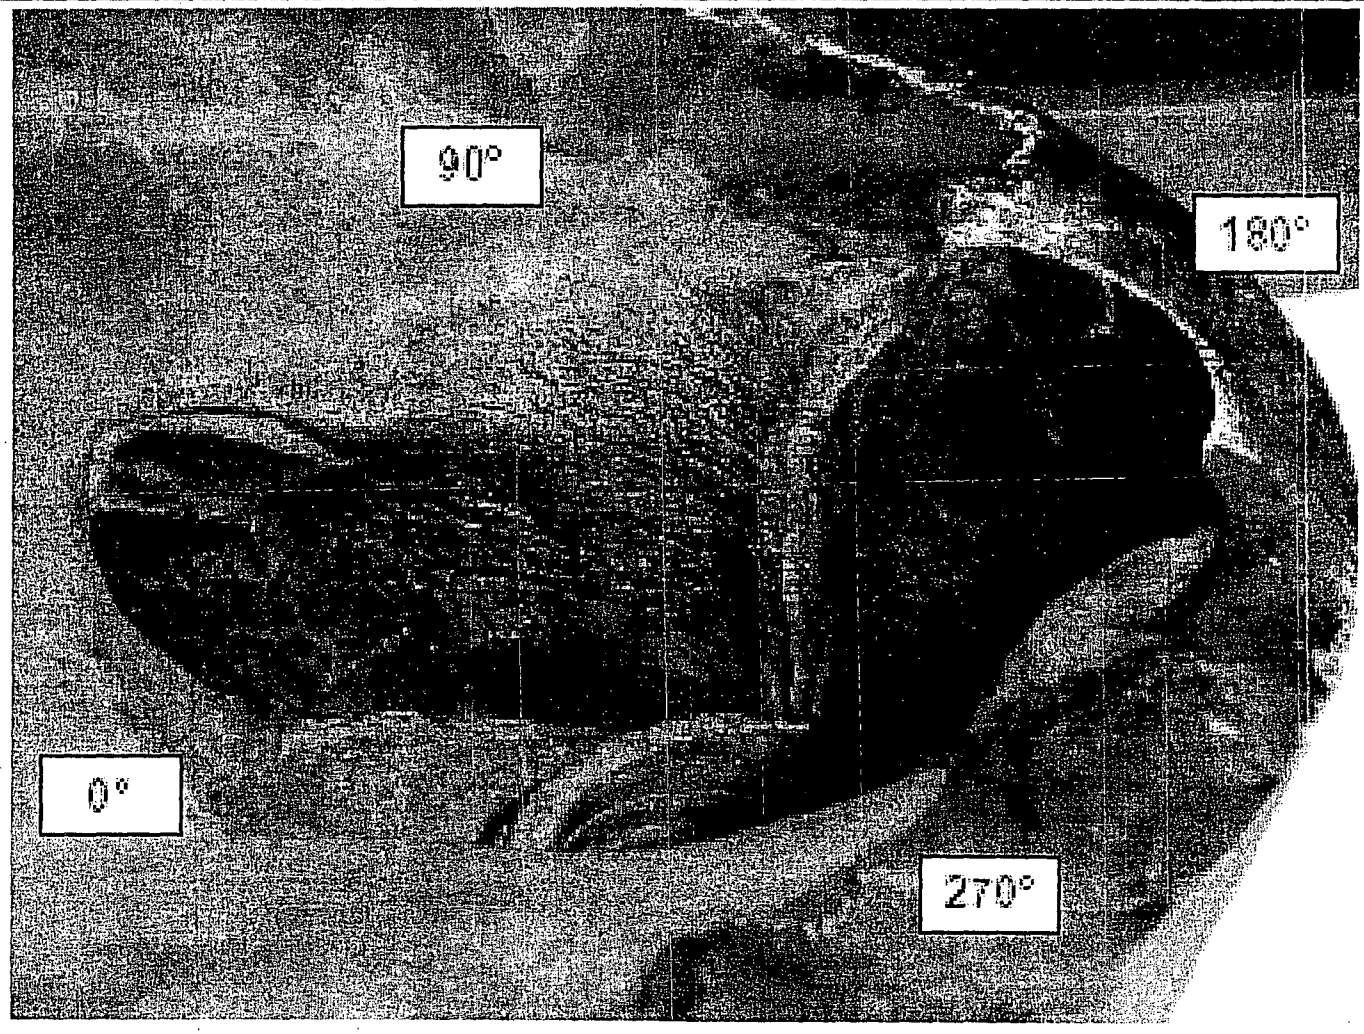

Exponent®

CRDM Nozzle 3 Cracking Behavior

- Nozzle 3 Alloy 600 Heat M3935 was shown to be highly susceptible to PWSCC
- Heat M3935 was used at Davis-Besse in the central 5 nozzles out of 69 total nozzles
- Cracking behavior of CRDM nozzles made from Heat M3935 has been highly variable

Exponent®

CRDM Nozzle 3 Cracking Behavior (cont'd)

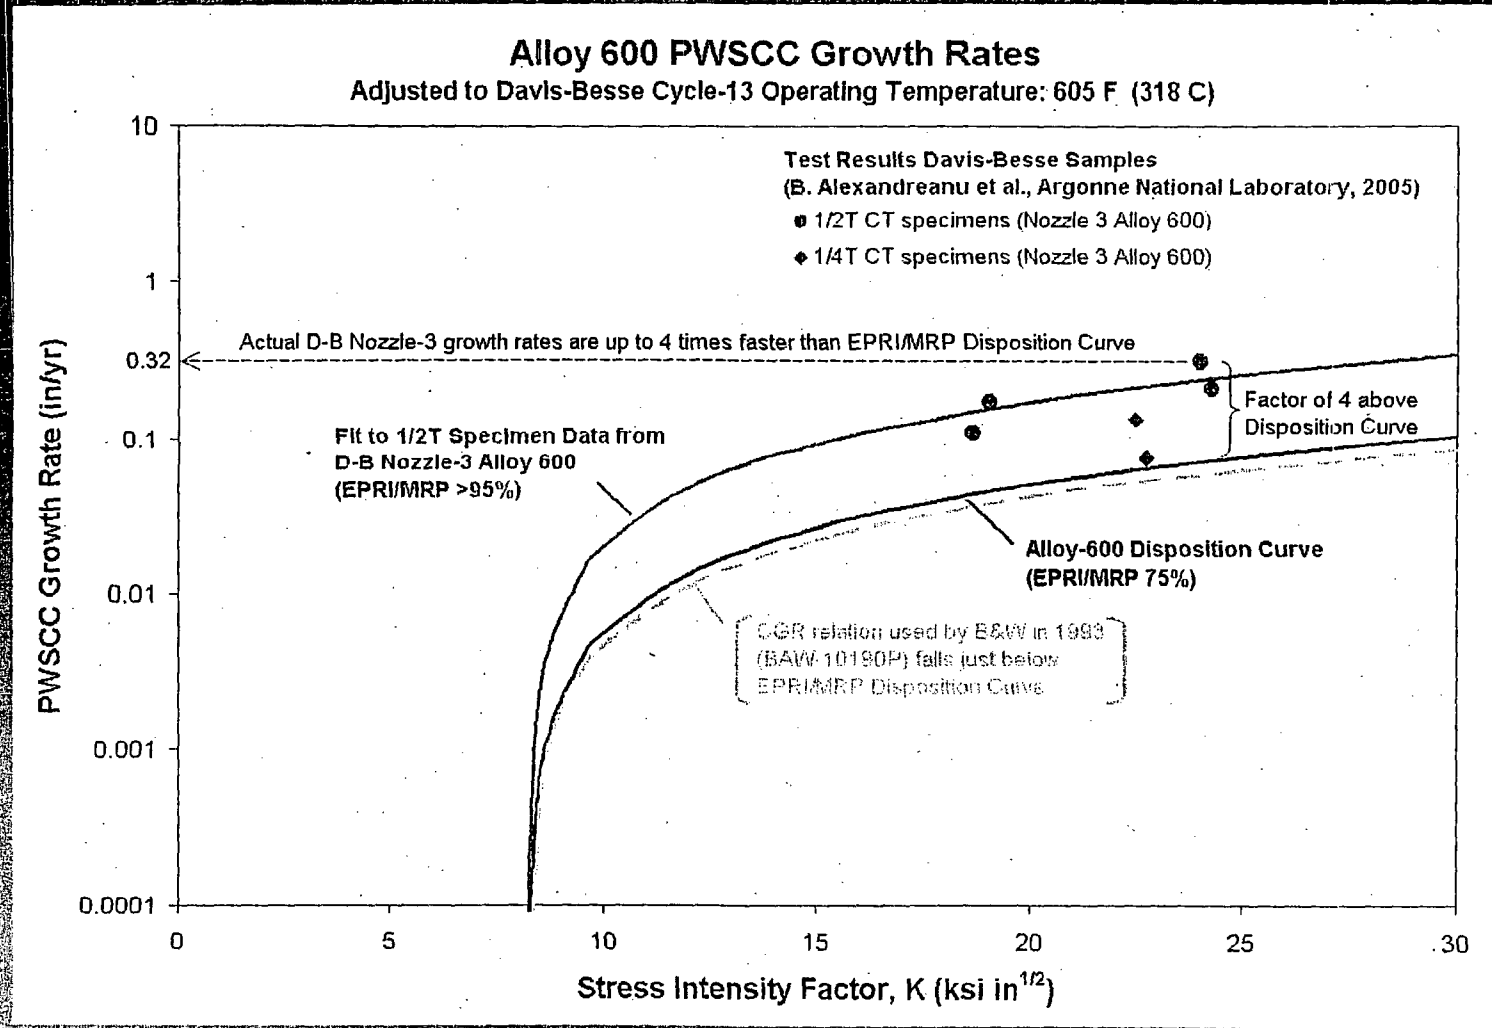

Exponent®

CRDM Nozzle 3 Cracking Behavior (cont'd)

- Actual Nozzle 3 Alloy 600 material exhibited very high crack growth rates in NRC/ANL work reported in 2006
- Crack growth rates for Nozzle 3 Alloy 600 material were 3 to 4 times industry expected rates, at 95th percentile of data
- Explains why the Nozzle 3 axial crack grew to 1.23 inches above the weld and 4.08 inches in total length
- Led to conclusion that cracking timeline for CRDM Nozzle 3 was much shorter than previously thought

Relevable

Exponent®