

APPENDIX 3G NUCLEAR ISLAND SEISMIC ANALYSES

3G.1 Introduction

This appendix summarizes the seismic analyses of the nuclear island building structures performed to support the AP1000 design certification extension from just hard rock sites, to sites ranging from soft soils to hard rock. The seismic Category I building structures consist of the containment building (the steel containment vessel [SCV] and the containment internal structures [CIS]), the shield building, and the auxiliary building. These structures are founded on a common basemat and are collectively known as the nuclear island or nuclear island structures. Key dimensions of the seismic Category I building structures, such as thickness of the basemat, floor slabs, roofs and walls, are shown in Figures 3.7.1-14 and 3.7.2-12.

Analyses were performed in accordance with the criteria and methods described in Section 3.7. Section 3G.2 describes the development of the finite element models. Section 3G.3 describes the soil structure interaction analyses of a range of site parameters and the selection of the parameters used in the design analyses. Section 3G.4 describes the fixed base and soil structure interaction dynamic analyses and provides typical results from these dynamic analyses. In Reference 3 are provided a summary of dynamic and seismic analysis results (i.e., modal model properties, accelerations, displacements response spectra) and the nuclear island liftoff analyses. The seismic analyses of the nuclear island are summarized in a seismic analysis summary report. Deviations from the design due to as-procured or as-built conditions are acceptable based on an evaluation consistent with the methods and procedures of Sections 3.7 and 3.8 provided the following acceptance criteria are met:

- The structural design meets the acceptance criteria specified in Section 3.8.
- The seismic floor response spectra (FRS) meet the acceptance criteria specified in subsection 3.7.5.4.

Depending on the extent of the deviations, the evaluation may range from documentation of an engineering judgment to performance of a revised analysis and design. The results of the evaluation will be documented in an as-built summary report by the Combined License applicant.

Table 3G.1-1 and Figure 3G.1-1 summarize the types of models and analysis methods that are used in the seismic analyses of the nuclear island, as well as the type of results that are obtained and where they are used in the design. Table 3G.1-2 summarizes the dynamic analyses performed and the methods used for combination of modal responses and directional input.

3G.2 Nuclear Island Finite Element Models

The AP1000 nuclear island consists of three distinct seismic Category I structures founded on a common basemat. The three building structures that make up the nuclear island are the coupled auxiliary and shield building (ASB), the SCV, and the CIS. The shield building and the auxiliary building are monolithically constructed with reinforced concrete and, therefore, considered one structure. The nuclear island is embedded approximately 40 feet with the bottom of basemat at elevation 60'-6" and plant grade located at elevation 100'-0". The CSV is described in

subsection 3.8.2, the CIS in subsection 3.8.3, the ASB in subsection 3.8.4, and the nuclear island basemat in subsection 3.8.5.

Seismic systems are defined, according to SRP 3.7.2 (Reference 1), Section II.3.a, as the seismic Category I structures that are considered in conjunction with their foundation and supporting media to form a soil-structure interaction model. Fixed base seismic analyses are performed for the nuclear island at a rock site. Soil-structure interaction analyses are performed for soil sites. The analyses generate a set of in-structure responses (design member forces, nodal accelerations, nodal displacements, and floor response spectra), which are used in the design and analysis of seismic Category I structures, components, and seismic subsystems. Concrete structures are modeled with linear elastic uncracked properties. However, the modulus of elasticity is reduced to 80% of the ACI code value to reduce stiffness to simulate cracking.

3G.2.1 Individual Building and Equipment Models

3G.2.1.1 Coupled Auxiliary and Shield Building

The finite element shell dynamic model of the coupled ASB is a finite element model using primarily shell elements. The portion of the model up to the elevation of the auxiliary building roof is developed using the solid model features of ANSYS, which allow definition of the geometry and structural properties. The nominal element size in the auxiliary building model is about 9 feet so that each wall has two elements for the wall height of about 18 feet between floors. This mesh size, which is the same as that of the solid model, has sufficient refinement for global seismic behavior. It is combined with a finite element model of the shield building roof and cylinder above the elevation of the auxiliary building roof. This model is shown in Figure 3G.2-1. This finite element shell dynamic model is part of the NI10 model.

Since the water in the passive containment cooling system tank responds at a very low frequency (sloshing) and does not affect building response, the passive containment cooling system tank water mass is reduced to exclude the low frequency water sloshing mass. The wall thickness of the bottom portion of the shield building (elevation 63.5' to 81.5') is modeled as one half (1.5') since the CIS model is connected to this portion and extends out to the mid-radius of the shield building cylindrical wall. Local portions of the ASB floors and walls are modeled with sufficient detail to give the response of the flexible areas.

3G.2.1.2 Containment Internal Structures

The finite element shell model of the containment internal structures is a finite element model using primarily shell elements for the walls and floors and solid elements for the mass concrete. It is developed using the solid model features of ANSYS, which allow definition of the geometry and structural properties. This model is used in both static and dynamic analyses. It models the inner and outer mass concrete basemats embedding the lower portion of the containment vessel, and the concrete structures above the mass concrete inside the containment vessel. The walls and basemat inside containment for this model are shown in Figure 3G.2-2. The basemat (dish) outside the containment vessel is shown in Figure 3G.2-3. This finite element shell dynamic model is part of the NI10 model. Static analyses are also performed on the model to obtain

member forces in the walls. This model is also used in the 3D finite element basemat model (see subsection 3.8.5.4.1).

3G.2.1.3 Containment Vessel

The SCV is a freestanding, cylindrical, steel shell structure with ellipsoidal upper and lower steel domes. The finite element model of the containment vessel is an axisymmetric model fixed at elevation 100'. Static analyses are performed with this model to obtain shell stresses as described in subsection 3.8.2.4.1.1. The model is also used to develop modal properties (frequencies and mode shapes). The three-dimensional, lumped-mass stick model of the SCV is developed based on the axisymmetric shell model. Figure 3G.2-4 presents the SCV stick model. In the stick model, the properties are calculated as follows:

- Members representing the cylindrical portion are based on the properties of the actual circular cross section of the containment vessel.
- Members representing the bottom head are based on equivalent stiffnesses calculated from the shell of revolution analyses for static 1.0g in vertical and horizontal directions.
- Shear, bending and torsional properties for members representing the top head are based on the average of the properties at the successive nodes, using the actual circular cross section. These are the properties that affect the horizontal modes. Axial properties, which affect the vertical modes, are based on equivalent stiffnesses calculated from the shell of revolution analyses for static 1.0g in the vertical direction.

The stick model is combined with the polar crane stick model as shown in Figure 3G.2-4. Modal properties of the containment vessel with and without the polar crane are shown in Table 3G.2-1. It is connected to nodes on the dish model. NI10 node numbers are shown in red and NI20 node numbers are shown in black.

The method used to construct a stick model from the axisymmetric shell model of the containment vessel is verified by comparison of the natural frequencies determined from the stick model and the shell of revolution model as shown in Table 3G.2-2. The shell of revolution vertical model ($n = 0$ harmonic) has a series of local shell modes of the top head above elevation 265' between 23 and 30 hertz. These modes are predominantly in a direction normal to the shell surface and cannot be represented by a stick model. These local modes have small contribution to the total response to a vertical earthquake as they are at a high frequency where seismic excitation is small. The only seismic Category I components attached to this portion of the top head are the water distribution weirs of the passive containment cooling system. These weirs are designed such that their fundamental frequencies are outside the 23 to 30 hertz range of the local shell modes.

3G.2.1.4 Polar Crane

The polar crane is supported on a ring girder, which is an integral part of the SCV at elevation 228'-0", as shown in Figure 3.8.2-1. It is modeled as a multi-degree of freedom system attached to the steel containment shell at elevation 224' (midpoint of ring girder) as shown in Figure 3G.2-4. The polar crane is modeled using a simplified and detailed model. The simplified model has

five masses at the mid-height of the bridge at elevation 233'-6" and one mass for the trolley, as shown in Figure 3G.2-5A. The polar crane model includes the flexibility of the crane bridge girders and truck assembly, and the containment shell's local flexibility. When fixed at the center of containment, the model shows fundamental frequencies of 3.3 hertz transverse to the bridge, 7.0 hertz vertically, and 6.4 hertz along the bridge. The Detailed Model of the polar crane consists of 28 nodes is defined having 96 dynamic degrees of freedom. It is used to verify the accuracy of the simplified model. This model is shown in Figure 3G.2-5B.

Nodes 1 to 4 represent the Trucks with elevation at top of rails (TOR). There are four nodes that are coincident with nodes 1 to 4 and used to add the local SCV stiffnesses (nodes 465 to 468, not shown in Figure).

1. Nodes 9 to 12 represent the trolley. The trolley is connected to the centerline of the polar crane girders at nodes 9 and 10.
2. Nodes 13 to 26 are located on the polar crane girders. The end nodes (13, 19, 20 and 26) are used to connect the cross beams to the girders; these nodes are also attached to the trucks (nodes 1 to 4) by rigid links.
3. Node 470 is at the center of containment at the top of rail elevation. Nodes 465 to 468 are attached to node 470 using rigid links.
4. Node 29, not shown in Figure, is located on the SCV. It is attached to 470 by a rigid link.

3G.2.1.5 Major Equipment and Structures using Stick Models

The major equipment supported by the CIS is represented by stick models connected to the CIS. These stick models are the reactor coolant loop model shown in Figure 3G.2-6, the pressurizer model shown in Figure 3G.2-7, and the core makeup tank model shown in Figure 3G.2-8. The core makeup tank model is used only in the nuclear island fine (NI10) model; the core makeup tank is represented by mass in the nuclear island coarse model (NI20).

3G.2.2 Nuclear Island Dynamic Models

Finite element shell models (3D) of the nuclear island concrete structures are used for the time history seismic analyses. Stick models are coupled to the shell models of the concrete structures for the containment vessel, polar crane, the reactor coolant loop and pressurizer. Two models are used. The fine (NI10) model is used to define the seismic response for the hard rock site. The coarse (NI20) model is used for the soil structure interaction (SSI) analyses. It is similar to the NI10 model with the exception that the mesh size for the ASB and CIS is approximately 20 feet instead of 10 feet. This model is set up in both ANSYS and SASSI. The NI10 and NI20 models are described in the subsections below.

3G.2.2.1 NI10 Model

The large solid-shell finite element model of the AP1000 nuclear island shown in Figure 3G.2-9 combines the ASB solid-shell model described in subsection 3G.2.1.1, and the CIS solid-shell model described in subsection 3G.2.1.2. The containment vessel and major equipment that are

supported by the CIS are represented by stick models and are connected to the CIS. These stick models are the SCV and the polar crane models, the reactor coolant loop model, core makeup tank models, and the pressurizer model. The stick models are described in subsections 3G.2.1.3 and 3G.2.1.4. The CIS and attached sticks are shown in Figure 3G.2-10. This AP1000 nuclear island model is referred to as the NI10 or fine model. The ASB portion of this model has a mesh size of approximately 10 feet.

The SCV is connected to the CIS model using constraint equations. The SCV at the bottom of the stick at elevation 100' (node 130401) is connected to CIS nodes at the same elevation. Figure 3G.2-4 shows the SCV stick model with the constraint equation nodes. The nodes are defined using a cylindrical coordinate system whose origin coincides with the center of containment (node 130401). The CIS vertical displacement is tied rigidly (constrained) to the vertical displacement and RX and RY rotations of node 130401. The CIS tangential displacement is tied rigidly (constrained) to the horizontal displacement and RZ rotation of node 130401.

3G.2.2.2 NI20 Model

The NI20 coarse model has fewer nodes and elements than the NI10 model. It captures the essential features of the nuclear island configuration. The nominal shell and solid element dimension is about 20 feet. It is used in the soil-structure interaction analyses of the nuclear island are performed using the program SASSI. The stick models are the same as used for the NI10 model except that the core makeup tank is not included. This model is shown in Figures 3G.2-11 and 3G.2-12. Results of fixed base analyses of the NI20 model were compared to those of the NI10 model to confirm the adequacy of the NI20 model for use in the soil-structure-interaction analyses.

3G.2.2.3 Nuclear Island Stick Model

The nuclear island lumped-mass stick model consists of the stick models of the individual buildings interconnected by rigid links. Each individual stick model is developed to match the modal properties of the finite element models described in subsections 3G.2.1.1 and 3G.2.1.2 above. Modal analyses and seismic time history analyses were performed using this model for the hard rock design certification.

The nuclear island lumped-mass stick model has been replaced in the design analyses described in this appendix by the NI10 and NI20 finite element shell dynamic models of the nuclear island described in subsections 3G.2.2.1 and 3G.2.2.2 above. A 2D stick model is used in the soil sensitivity analyses described in subsection 3G.3.

3G.2.3 Static Models

Member forces in the ASB are obtained from analyses of a model that is more refined than the finite element model described in subsection 3G.2.1.1. This model is developed by meshing one area of the solid model with four finite elements. The nominal element size in this auxiliary building model is about 4.5 feet so that each wall has four elements for the wall height of about 18 feet between floors. This finite element shell model is referred to as the NI05 model. This refinement is used to calculate the design member forces and moments using response spectra analysis of the nuclear island models with seismic input enveloping all soil conditions. The finite

element shell model of the containment internal structures described in subsections 3G.2.1.2, which includes the basemat within the shield building and the containment vessel stick model, is also included.

3G.3 2D SASSI Analyses

This section describes the soil structure interaction analyses performed using 2D models in SASSI to select the design soil cases for the AP1000. The AP1000 footprint, or interface to the soil medium, is identical to the AP600. The AP1000 containment and shield building are 25' 6" and 20' 6" (Reference 4) respectively taller than AP600. Results and conclusions from the AP600 soil studies (Reference 2) are considered in establishing the design soil profiles for the AP1000.

Analyses were performed using 2D stick models of the AP1000 for horizontal seismic input with and without adjacent structures. The soil profiles included a hard rock site, a firm rock site, a soft rock site, a soft-to-medium soil site, an upper bound soft-to-medium site, and a soft soil site. Analyses were also performed without adjacent structures for a hard rock site, a firm rock site, a soft rock site, a soft-to-medium soil site, an upper bound soft-to-medium site, and a soft soil site. The soil damping and degradation curves are described in subsection 3.7.1.4. The soil profiles selected for the AP1000 use the same parameters on depth to bedrock, depth to water table, and variation of shear wave velocity with depth as those used in the AP600 design analyses. The Poisson's ratio is 0.25 for rock sites (hard and firm rock) and 0.35 for soil sites (soft-to-medium soil, and upper bound soft-to-medium soil). For all the soil profiles defined, the base rock has been taken to be at 120 feet below grade level. The soil profiles are shown in Figure 3G.3-1. The shear wave velocity profiles and related governing parameters are as follows:

- For the hard rock site, an upper bound case for rock sites using a shear wave velocity of 8000 feet per second.
- For the firm rock site, a shear wave velocity of 3500 feet per second to a depth of 120 feet, and base rock at the depth of 120 feet.
- For the soft rock site, a shear wave velocity of 2400 feet per second at the ground surface, increasing linearly to 3200 feet per second at a depth of 240 feet, and base rock at the depth of 120 feet.
- For the upper bound soft-to-medium soil site, a shear wave velocity of 1414 feet per second at ground surface, increasing parabolically to 3394 feet per second at 240 feet, base rock at the depth of 120 feet, and ground water at grade level. The initial soil shear modulus profile is twice that of the soft-to-medium soil site.
- For the soft-to-medium soil site, a shear wave velocity of 1000 feet per second at ground surface, increasing parabolically to 2400 feet per second at 240 feet, base rock at the depth of 120 feet, and ground water is assumed at grade level.
- For the soft soil site, a shear wave velocity of 1000 feet per second at ground surface, increasing linearly to 1200 feet per second at 240 feet, base rock at the depth of 120 feet, and ground water is assumed at grade level.

The analyses with and without adjacent structures demonstrated that the effect of adjacent buildings on the nuclear island response is small. Based on this, the 3D SASSI analyses of the AP1000 nuclear island can be performed without adjacent buildings similar to those performed for the AP600.

The maximum acceleration values obtained from the AP1000 analyses without adjacent structures are given in Table 3G.3-1. The soil cases giving the maximum response are shown in bold. Floor response spectra associated with nodes 41, 120, 310, 411, and 535 for the six AP1000 soil cases are shown in Figures 3G.3-2 to 3G.3-11.

Based on review of the above results, five soil conditions were selected for 3D SASSI analyses in addition to the hard rock condition evaluated in the existing AP1000 Design Certification. Thus, the following five soil and rock cases identified in subsection 3.7.1.4 are considered: hard rock, firm rock, soft rock, soft-to-medium soil, upper bound soft-to-medium, and soft soil.

3G.4 Nuclear Island Dynamic Analyses

3G.4.1 ANSYS Fixed Base Analysis

The NI10 model described in subsection 3G.3.2.2.1 was analyzed by time history modal superposition. To perform the time history analysis of this large model, the ANSYS superelement (substructuring) techniques were applied. Substructuring is a procedure that condenses a group of finite elements into one element represented as a matrix. The reasons for substructuring are to reduce computer time of subsequent evaluations. Two sets of analyses were performed. To obtain the time history response of the ASB, the ASB finite element model was merged with the superelement of the CIS and its major components. To obtain the time history response of the CIS, the CIS finite element model was merged with the superelement of the ASB.

Deflection time history responses were obtained at selected representative locations. These locations included major wall and floor intersections and nodes at the cardinal orientations at key elevations of the shield building. Nodes were also selected at mid-span on flexible walls and floors. Typical locations are shown for the ASB at elevation 135' on Figures 3G.4-1 and 3G.4-2. Figure 3G.4-1 shows the "rigid" locations, and Figure 3G.4-2 shows the "flexible" locations.

3G.4.2 3D SASSI Analyses

The computer program SASSI2000 is used to perform Soil-Structure Interaction analysis with the NI20 Coarse Finite Element Model. The SASSI Soil-Structure Interaction analyses are performed for the five soil conditions established from the AP1000 2D SASSI analyses. These soil conditions are firm rock, soft rock, soft-to-medium soil, upper bound soft-to-medium, and soft soil. The model includes a surrounding layer of excavated soil and the existing soil media as shown in Figures 3G.4-3 and 3G.4-4. Acceleration time histories and floor response spectra are obtained. Adjacent structures have a negligible effect on the nuclear island structures and, thus, are not considered in the 3D SASSI analyses.

In these analyses, the three components of ground motions (N-S, E-W, and vertical direction) are input separately. Each design acceleration time history (N-S, E-W, and vertical) is applied separately, and the time history responses are calculated at the required nodes. The resulting

co-linear time history responses at a node due to the three earthquake components are then combined algebraically.

3G.4.3 Seismic Analysis

3G.4.3.1 Response Spectrum Analysis

The response spectrum methodology used in the AP1000 design employs the Complete Quadratic Combination (CQC, Section 1.1 of Reference 5) grouping method for closely spaced modes with the Der Kiureghian Correlation Coefficient (Section 1.1.3 of Reference 5) used for correlation between modes. The Lindley-Yow (Section 1.3.2, Reference 5) spectra analysis methodology is employed for modes with both periodic and rigid response components. The modal analysis performed to develop composite modal participation is used to develop input for the response spectrum analysis. Modes ranging from 0 to 33 Hz or higher are considered. For modes above the cutoff frequency, the Lindley-Yow is used. The Static ZPA Method (Section 1.4.2, Reference 5) is employed for the residual rigid response component for each mode as outlined in NRC Regulatory Guide 1.92 (Reference 5). The complete solution is developed via Combination Method B (Section 1.5.2, Reference 5). The combined effects, considering three spatial components of an earthquake (N-S, E-W, and Vertical), are combined by square root sum of the squares method (Section 2.1, Reference 5).

3G.4.3.2 Absolute Accelerations

The seismic analyses results, which include the new shield building configuration described in Section 3.8, are given in Reference 3.

3G.4.3.3 Seismic Response Spectrum

The AP1000 plant floor response spectrum for the six key locations is provided in Figure 3G.4-5X to 3G.4-10Z. The bay locations are defined in Table 3G.4-1.

3G.5 References

1. NUREG-800, Review of Safety Analysis Reports for Nuclear Power Plants, Section 3.7.2, Seismic System Analysis, Revision 2.
2. GW-GL-700, AP600 Design Control Document, Appendices 2A and 2B, Revision 4.
3. APP-GW-S2R-010, "Extension of Nuclear Island Seismic Analyses to Soil Sites," Revision 1, Westinghouse Electric Company LLC.
4. APP-GW-GLN-112, "Structural Verification for Enhanced Shield Building," Westinghouse Electric Company LLC.
5. U.S. NRC Regulatory 1.92, Revision 2, "Combining Modal Responses and Spatial Components in Seismic Analysis."

Table 3G.1-1 (Sheet 1 of 4)

SUMMARY OF MODELS AND ANALYSIS METHODS

Model	Analysis Method	Program	Type of Dynamic Response/Purpose
3D (ASB) solid-shell model	-	ANSYS	Creates the finite element mesh for the ASB finite element model.
3D (CIS) solid-shell model	-	ANSYS	Creates the finite element mesh for the CIS finite element model.
3D finite element model including shield building roof (ASB10)	-	ANSYS	ASB portion of NI10.
3D finite element model including dish below containment vessel	-	ANSYS	CIS portion of NI10.
3D finite element shell model of nuclear island [NI05] (coupled auxiliary and shield building shell model, containment internal structures, steel containment vessel, polar crane, RCL, pressurizer, and CMTs)	Mode superposition time history analysis and response spectra analysis	ANSYS	<p>Performed for hard rock profile for ASB with CIS as superelement and for CIS with ASB as superelement.</p> <p>Floor and wall flexibility included in models.</p> <p>To develop time histories for generating plant design floor response spectra for nuclear island structures.</p> <p>To obtain maximum absolute nodal accelerations (ZPA) to be used in equivalent static analyses.</p> <p>To obtain maximum displacements relative to basemat.</p>
3D finite element coarse shell model of auxiliary and shield building and containment internal structures [NI20] (including steel containment vessel, polar crane, RCL, and pressurizer)	Mode superposition time history analysis	ANSYS	Performed for hard rock profile for comparisons against more detailed NI10 model.

Table 3G.1-1 (Sheet 2 of 4)

SUMMARY OF MODELS AND ANALYSIS METHODS

Model	Analysis Method	Program	Type of Dynamic Response/Purpose
Finite element lumped-mass stick model of nuclear island	Time history analysis	SASSI	Performed 2D parametric soil studies to help establish the bounding generic soil conditions.
Finite element lumped-mass stick model of nuclear island	Direct integration time history analysis	ANSYS	Performed 2D linear and non-linear seismic analyses to evaluate effect of lift off on Floor Response Spectra and bearing.
3D finite element coarse shell model of auxiliary and shield building and containment internal structures [NI20] (including steel containment vessel, polar crane, RCL, and pressurizer)	Time history analysis	SASSI	<p>Performed for the five soil profiles of firm rock, soft rock, upper bound soft-to-medium soil, soft-to-medium soil, and soft soil.</p> <p>To develop time histories for generating plant design floor response spectra for nuclear island structures.</p> <p>To obtain maximum absolute nodal accelerations (ZPA) to be used in equivalent static analyses.</p> <p>To obtain maximum displacements relative to basemat.</p> <p>To obtain maximum member forces and moments in selected elements for comparison to equivalent static results.</p>
3D shell model of auxiliary and shield building and containment internal structures [NI20] (including steel containment vessel)	Mode superposition time history analysis	ANSYS	Performed to develop loads for seismic stability evaluation.
3D shell of revolution model of steel containment vessel	Modal analysis; equivalent static analysis using accelerations from time history analyses	ANSYS	<p>To obtain dynamic properties.</p> <p>To obtain SSE stresses for the containment vessel.</p>
3D lumped-mass stick model of the SCV	-	ANSYS	Used in the NI10 and NI20 models.

Table 3G.1-1 (Sheet 3 of 4)

SUMMARY OF MODELS AND ANALYSIS METHODS

Model	Analysis Method	Program	Type of Dynamic Response/Purpose
3D lumped-mass stick model of the RCL	-	ANSYS	Used in the NI10 and NI20 models.
3D lumped-mass stick model of the pressurizer	-	ANSYS	Used in the NI10 and NI20 models.
3D lumped-mass stick model of the CMT	-	ANSYS	Used in the NI10 model.
3D lumped mass detailed model of the polar crane	Modal analysis	ANSYS	To obtain dynamic properties. Used with 3D finite element shell model of the containment vessel.
3D lumped mass simplified (single beam) model of the polar crane	-	ANSYS	Used in the NI10 and NI20 models.
3D finite element shell model of containment vessel	Mode superposition time history analysis Equivalent static analysis	ANSYS	Used with detailed polar crane model to obtain acceleration response of equipment hatch and airlocks. To obtain shell stresses in vicinity of the large penetrations of the containment vessel.
3D finite element refined shell model of nuclear island (NI05)	Equivalent static non-linear analysis using accelerations from time history analyses Response spectrum analysis with seismic input enveloping all soils cases	ANSYS	To obtain SSE member forces for the nuclear island basemat. To obtain SSE member forces for the auxiliary and shield building and the containment internal structures. To obtain maximum displacements relative to basemat.

Table 3G.1-1 (Sheet 4 of 4)

SUMMARY OF MODELS AND ANALYSIS METHODS

Model	Analysis Method	Program	Type of Dynamic Response/Purpose
3D finite element coarse shell model of auxiliary and shield building and containment internal structures [NI20] (including steel containment vessel, polar crane, RCL, and pressurizer)	Mode superposition time history analysis with seismic input enveloping all soil cases	ANSYS	To obtain total basemat reactions for overturning and stability evaluation. To obtain total basemat reactions for comparison to reactions in equivalent static linear analyses using NI05 model.

Table 3G.1-2				
SUMMARY OF DYNAMIC ANALYSES AND COMBINATION TECHNIQUES				
Model	Analysis Method	Program	Three Components Combination	Modal Combination
3D finite element, fixed base models, coupled auxiliary and shield building shell model, with superelement of containment internal structures (NI10 and NI20)	Mode superposition time history analysis	ANSYS	Algebraic Sum	n/a
3D finite element nuclear island model (NI20)	Complex frequency response analysis	SASSI	Algebraic Sum	n/a
3D finite element, fixed base models, coupled auxiliary and shield building and containment internal structures including shield building roof (NI05)	Response spectrum analysis	ANSYS	SRSS or 100%, 40%, 40%	Lindley-Yow
3D finite element model of the nuclear island basemat (NI05)	Equivalent static analysis using nodal accelerations from shell model	ANSYS	100%, 40%, 40%	n/a
3D shell of revolution model of steel containment vessel	Equivalent static analysis using nodal accelerations from 3D stick model	ANSYS	SRSS or 100%, 40%	n/a
PCS valve room and miscellaneous steel frame structures, miscellaneous flexible walls, and floors	Response spectrum analysis	ANSYS	SRSS or 100%, 40%, 40%	Grouping or Lindley-Yow
2D stick model analyses with lift off	Direct integration time history	ANSYS	Algebraic Sum	n/a

Table 3G.2-1 (Sheet 1 of 2)				
STEEL CONTAINMENT VESSEL LUMPED-MASS STICK MODEL (WITHOUT POLAR CRANE) MODAL PROPERTIES				
Mode	Frequency	Effective Mass		
		X Direction	Y Direction	Z Direction
1	6.309	2.380	159.153	0.005
2	6.311	159.290	2.382	0.000
3	12.942	0.018	0.000	0.000
4	16.970	0.000	0.006	171.030
5	18.960	0.102	40.263	0.002
6	18.970	40.161	0.102	0.000
7	28.201	0.000	0.000	28.073
8	31.898	0.054	2.636	0.000
9	31.999	2.789	0.057	0.000
10	37.990	0.909	0.007	0.000
11	38.634	0.022	4.846	0.009
12	38.877	3.758	0.014	0.000
13	47.387	0.000	0.000	5.066
14	54.039	4.649	0.633	0.000
15	54.065	0.624	4.693	0.002
16	60.628	0.002	0.042	3.389
17	62.734	0.147	0.001	0.018
18	63.180	0.000	0.050	7.069
19	63.613	0.002	0.001	0.003
20	65.994	0.022	0.659	0.041
Sum of Effective Masses		214.929	215.545	214.706

Notes:

1. Fixed at Elevation 100'.
2. The total mass of the containment vessel is 225.697 kip-sec²/ft.

Table 3G.2-1 (Sheet 2 of 2)				
STEEL CONTAINMENT VESSEL LUMPED-MASS STICK MODEL (WITH POLAR CRANE) MODAL PROPERTIES				
Mode	Frequency	Effective Mass		
		X Direction	Y Direction	Z Direction
1	3.619	0.000	41.959	0.000
2	5.387	175.274	0.000	0.175
3	6.192	0.000	148.385	0.005
4	6.415	3.321	0.000	24.074
5	9.422	0.002	1.017	0.000
6	9.674	10.510	0.000	0.532
7	12.811	0.015	0.001	0.000
8	15.757	0.004	0.320	0.010
9	16.367	3.103	0.003	159.153
10	17.495	28.537	0.001	19.546
11	18.944	0.000	40.053	0.001
12	21.043	10.724	0.000	0.426
13	22.102	0.000	0.005	0.000
14	27.340	0.054	0.000	18.661
15	30.387	2.978	0.001	1.559
16	31.577	0.002	3.526	0.004
17	35.033	0.194	0.006	3.895
18	35.535	0.211	0.027	0.399
19	35.646	0.000	1.451	0.019
20	37.599	0.325	0.426	0.007
Sum of Effective Masses		235.254	237.181	228.465

Notes:

1. Fixed at Elevation 100'.
2. The total mass of the containment vessel with the polar crane is 255.85 kip-sec²/ft.

Table 3G.2-2				
COMPARISON OF FREQUENCIES FOR CONTAINMENT VESSEL SEISMIC MODEL				
Mode No.	Vertical Model		Horizontal Model	
	Shell of Revolution Model	Stick Model	Shell of Revolution Model	Stick Model
1	16.51 hertz	16.97 hertz	6.20 hertz	6.31 hertz
2	23.26 hertz	28.20 hertz	18.58 hertz	18.96 hertz

Note:

1. Fixed at elevation 100'.

Table 3G.3-1								
AP1000 ZPA FOR 2D SASSI CASES								
	North-South		Hard Rock ZPA [g]	Firm Rock ZPA [g]	Soft Rock ZPA [g]	UBSM ZPA [g]	SM ZPA [g]	Soft Soil ZPA [g]
	Node	El. feet						
ASB	21	81.5	0.326	0.326	0.345	0.358	0.306	0.249
	41	99	0.348	0.327	0.347	0.361	0.308	0.227
	120	179.6	0.571	0.501	0.469	0.498	0.529	0.247
	150	242.5	0.803	0.795	0.816	0.819	0.787	0.29
	310	333.1	1.449	1.561	1.567	1.524	1.226	0.453
SCV	407	138.6	0.405	0.424	0.408	0.387	0.407	0.232
	411	200	0.82	0.916	0.672	0.541	0.484	0.263
	417	281.9	1.396	1.465	1.031	0.723	0.598	0.372
CIS	535	134.3	0.548	0.45	0.347	0.368	0.355	0.229
	538	169	1.517	0.874	0.45	0.441	0.397	0.317
	East-West		Hard Rock ZPA [g]	Firm Rock ZPA [g]	Soft Rock ZPA [g]	UBSM ZPA [g]	SM ZPA [g]	Soft Soil ZPA [g]
	Node	El. feet						
ASB	21	81.5	0.309	0.318	0.359	0.376	0.311	0.235
	41	99	0.318	0.336	0.367	0.385	0.317	0.237
	120	179.6	0.607	0.561	0.546	0.549	0.605	0.295
	150	242.5	0.84	0.823	0.854	0.912	0.962	0.557
	310	333.1	1.449	1.536	1.624	1.74	1.506	0.891
SCV	407	138.6	0.528	0.529	0.535	0.513	0.38	0.247
	411	200	0.817	0.95	0.816	0.741	0.515	0.429
	417	281.9	1.251	1.503	1.136	0.985	0.716	0.675
CIS	535	134.3	0.52	0.404	0.391	0.404	0.365	0.259
	538	169	1.679	1.052	0.755	0.553	0.526	0.441

Table 3G.4-1		
KEY NODES AT LOCATION		
Location	General Area	Elevation (feet)
CIS at Reactor Vessel Support Elevation	SCV Center	100.00
CIS at Operating Deck	SG West Compartment, NE	134.25
ASB NE Corner at Control Room Floor	NE Corner	116.50
ASB Corner of Fuel Building Roof at Shield Building	NW Corner of Fuel Bldg	179.19
ASB Shield Building Roof Area	South Side of Shield Bldg	327.41
SCV Near Polar Crane	SCV Stick Model	224.00

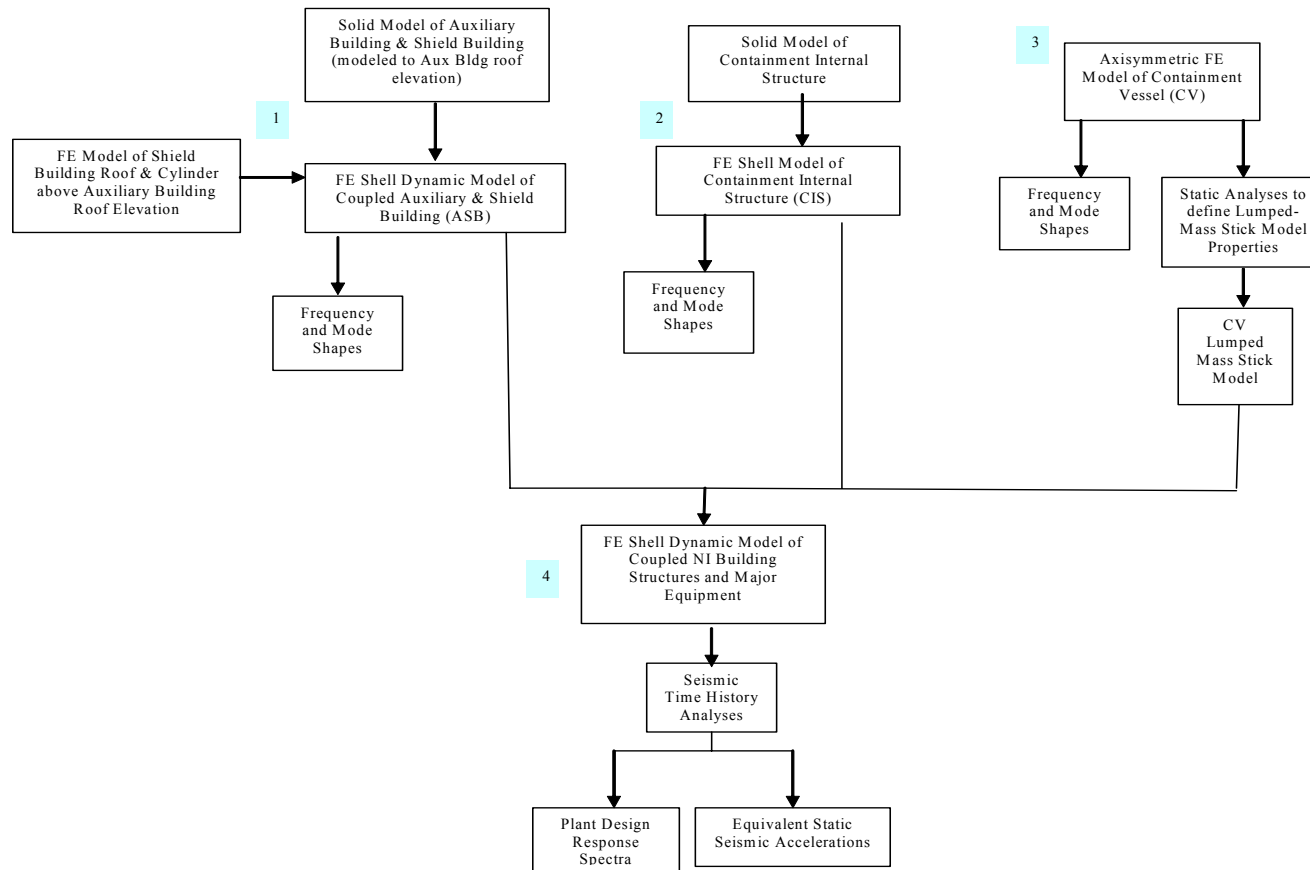


Figure 3G.1-1

Nuclear Island Seismic Analysis Models


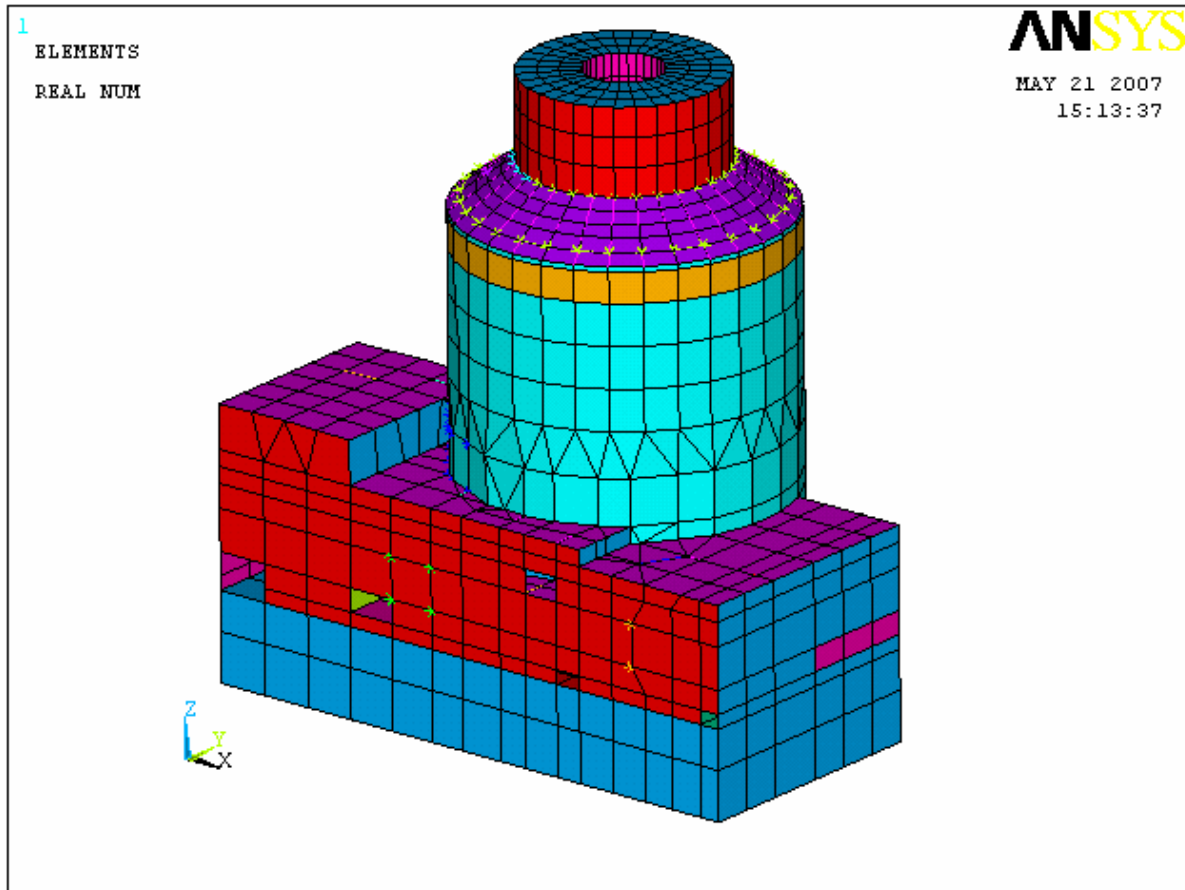


Figure 3G.2-1

**3D Finite Element Model of
Coupled Shield and Auxiliary Building**

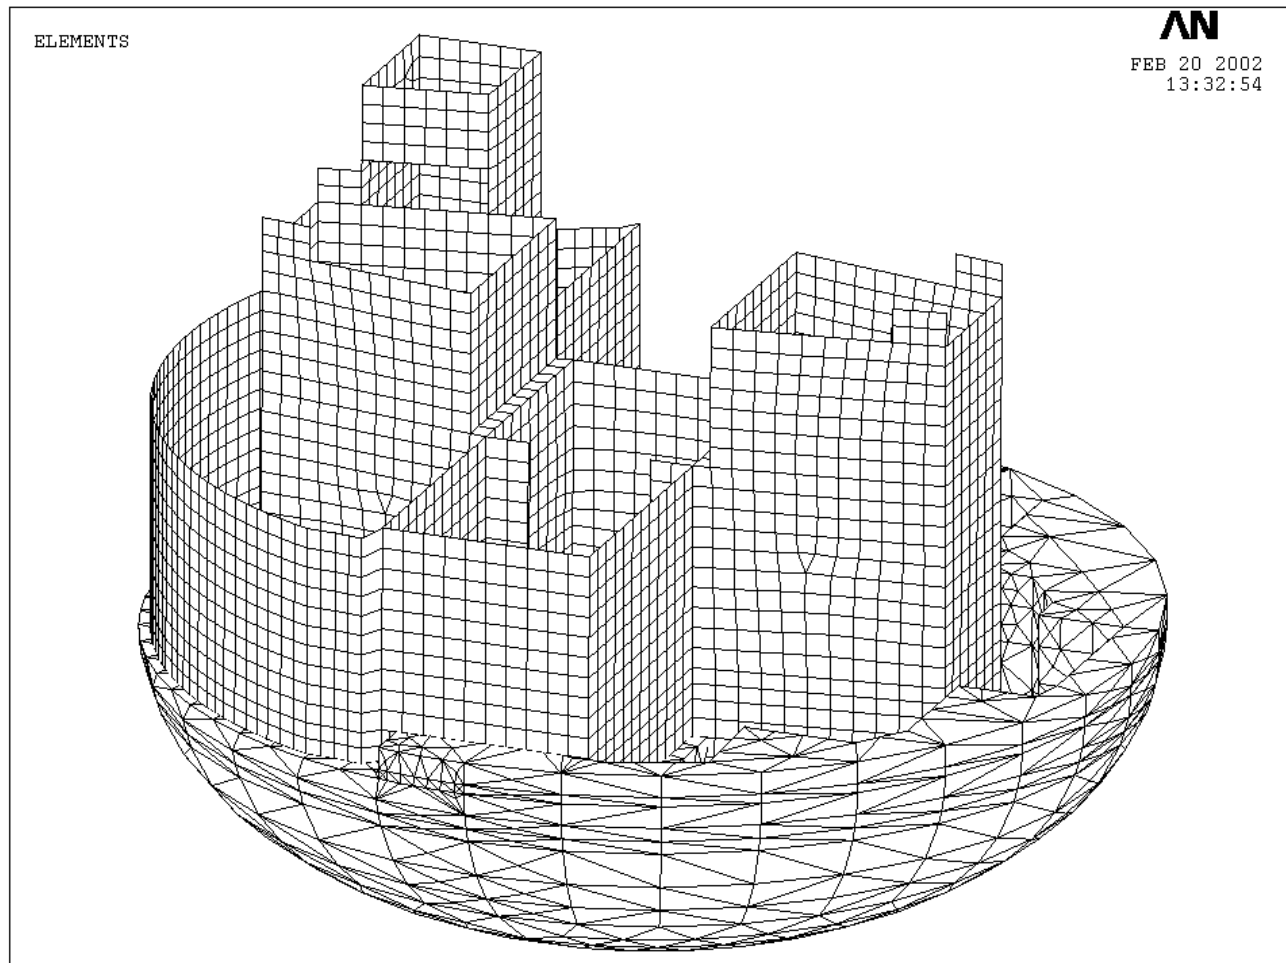

Note: This figure shows the finite element model of walls and basemat inside containment.
Floors are not shown.

Figure 3G.2-2

**3D Finite Element Model of
Containment Internal Structures**

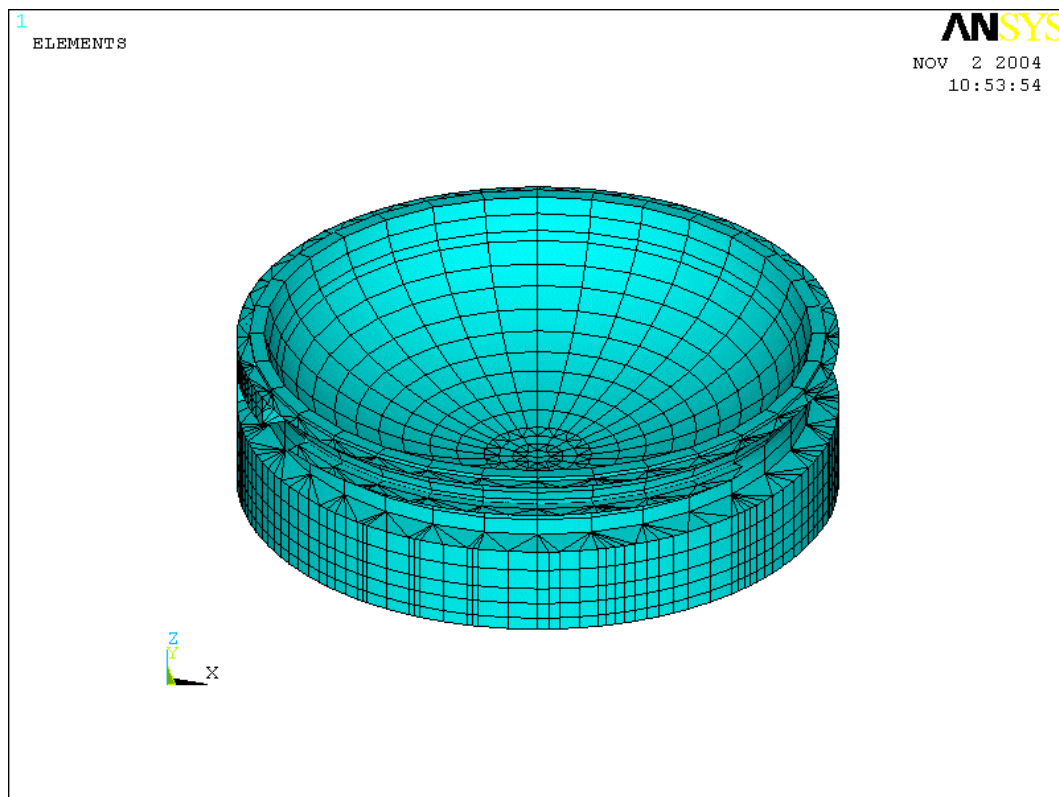


Figure 3G.2-3

**3D Finite Element Model of
Containment Outer Basemat (Dish)**


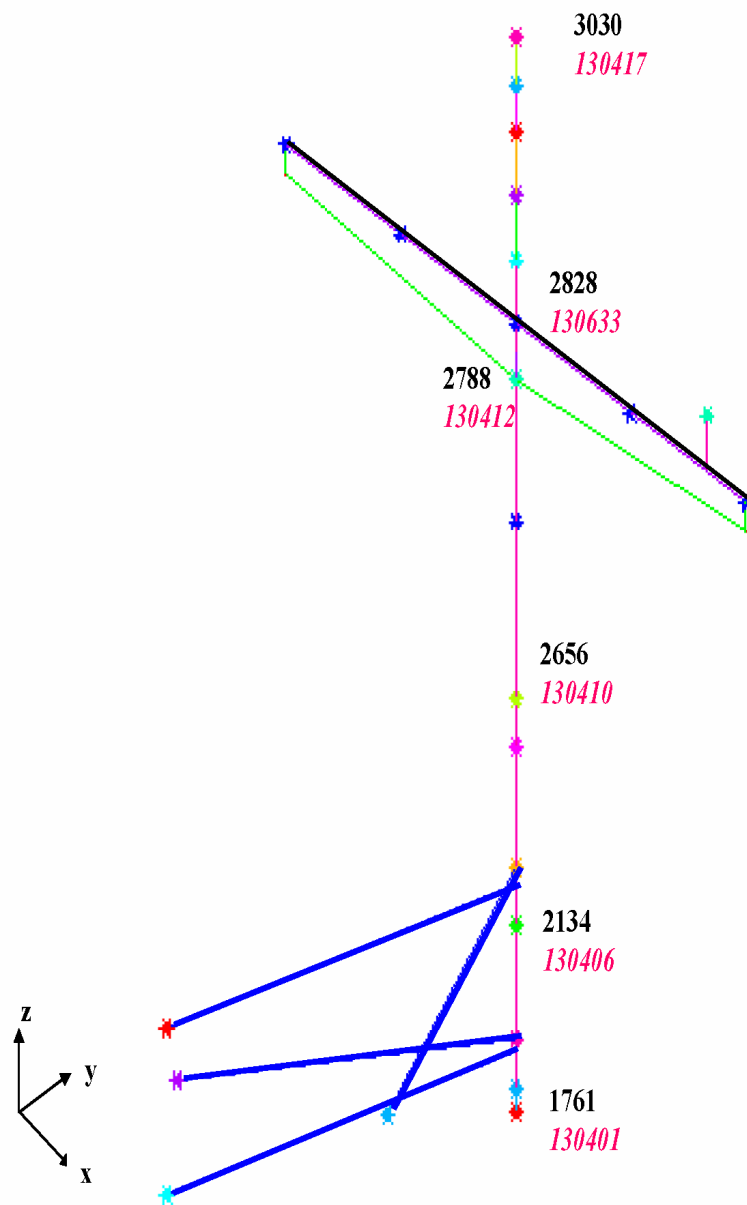


Figure 3G.2-4

Steel Containment Vessel and Polar Crane Models

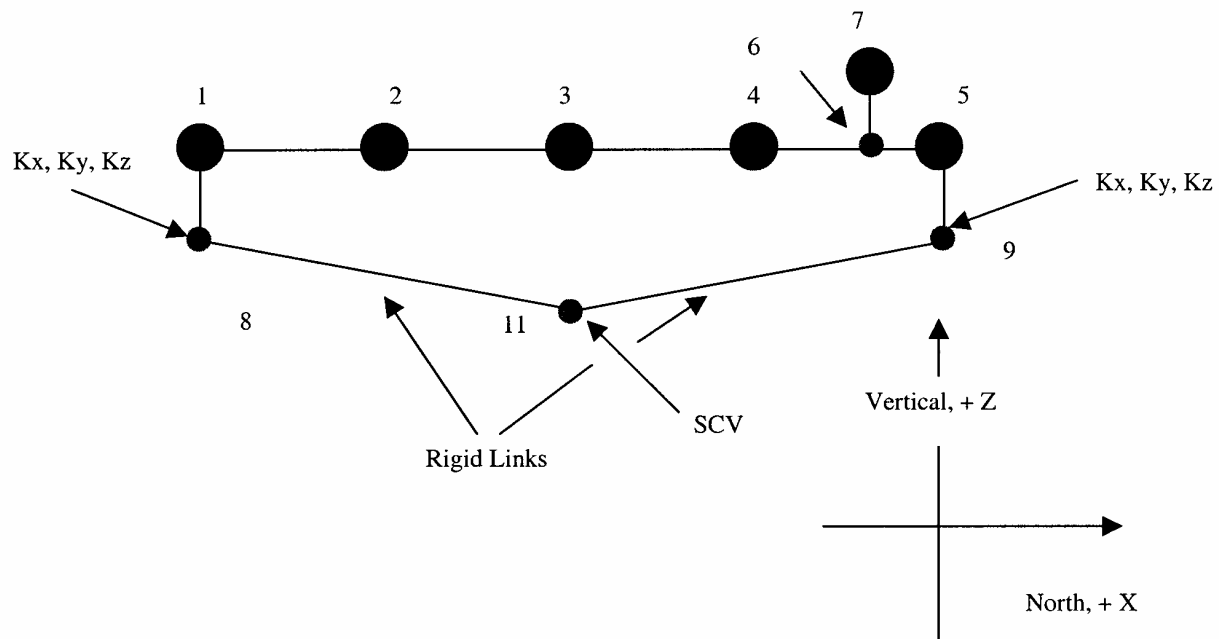

Local SCV Stiffness are K_x , K_y , K_z

Dynamic Degrees of Freedom

- Masses at nodes 1, 2, 3, 4, 5, and 7
- All Mass nodes have DOFs in X, Y, and Z directions

Comments:

1. Cross Beams between girders are represented by rotation spring constants K_{xx} and K_{zz}
2. Cross Beam rotational spring constant K_{yy} is negligible compared to girder stiffness

Figure 3G.2-5A

Polar Crane Model Simplified Model

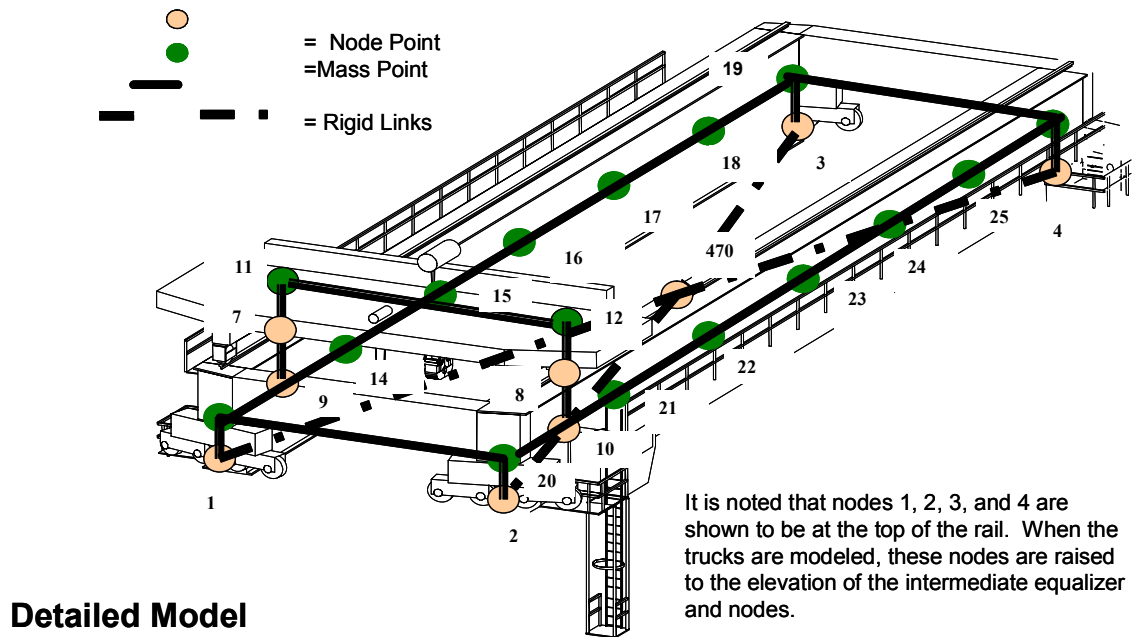


Figure 3G.2-5B

Polar Crane Model Detailed Model

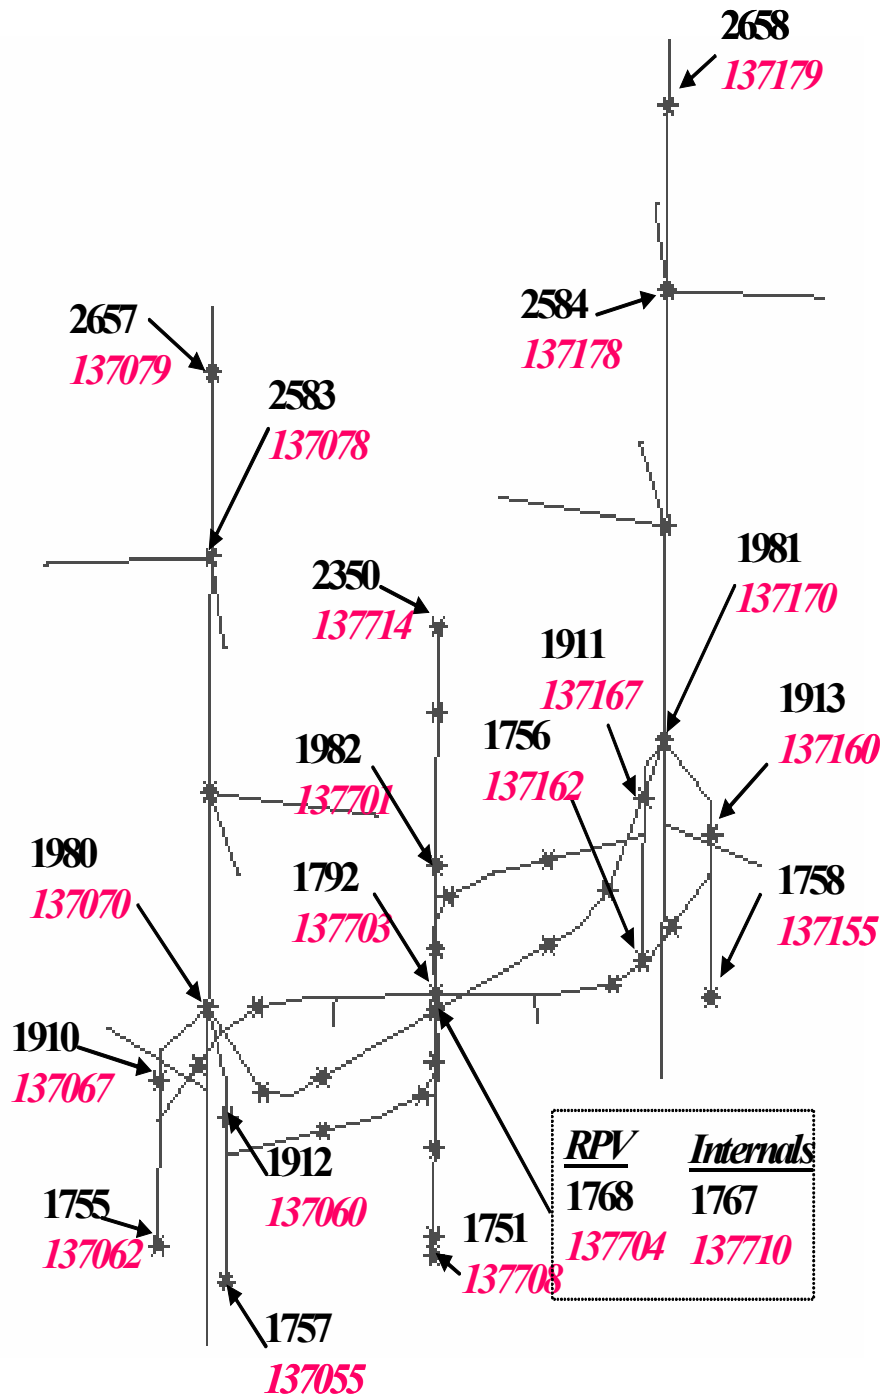


Figure 3G.2-6

Reactor Coolant Loop
Lumped-Mass Stick Model

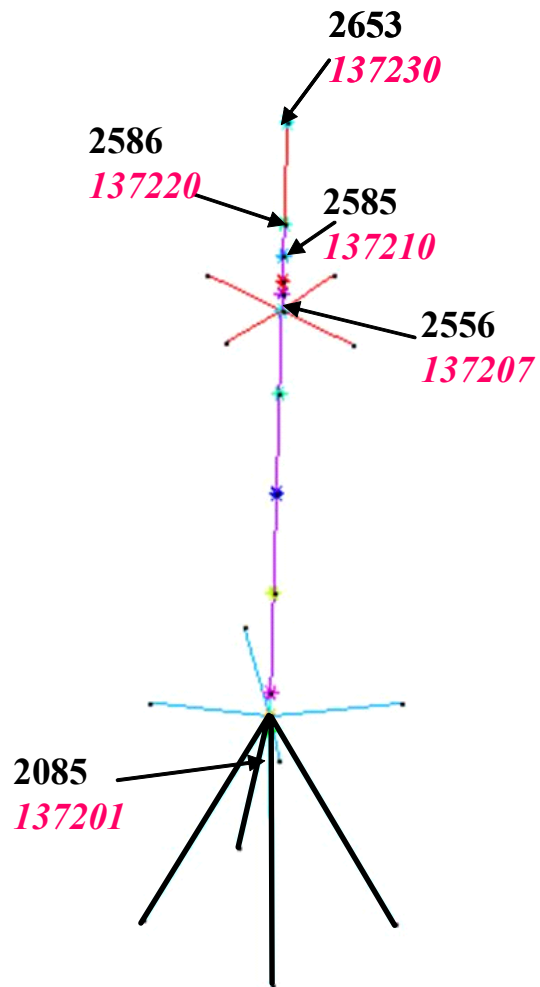


Figure 3G.2-7

Pressurizer Model



Figure 3G.2-8

Core Makeup Tank Models

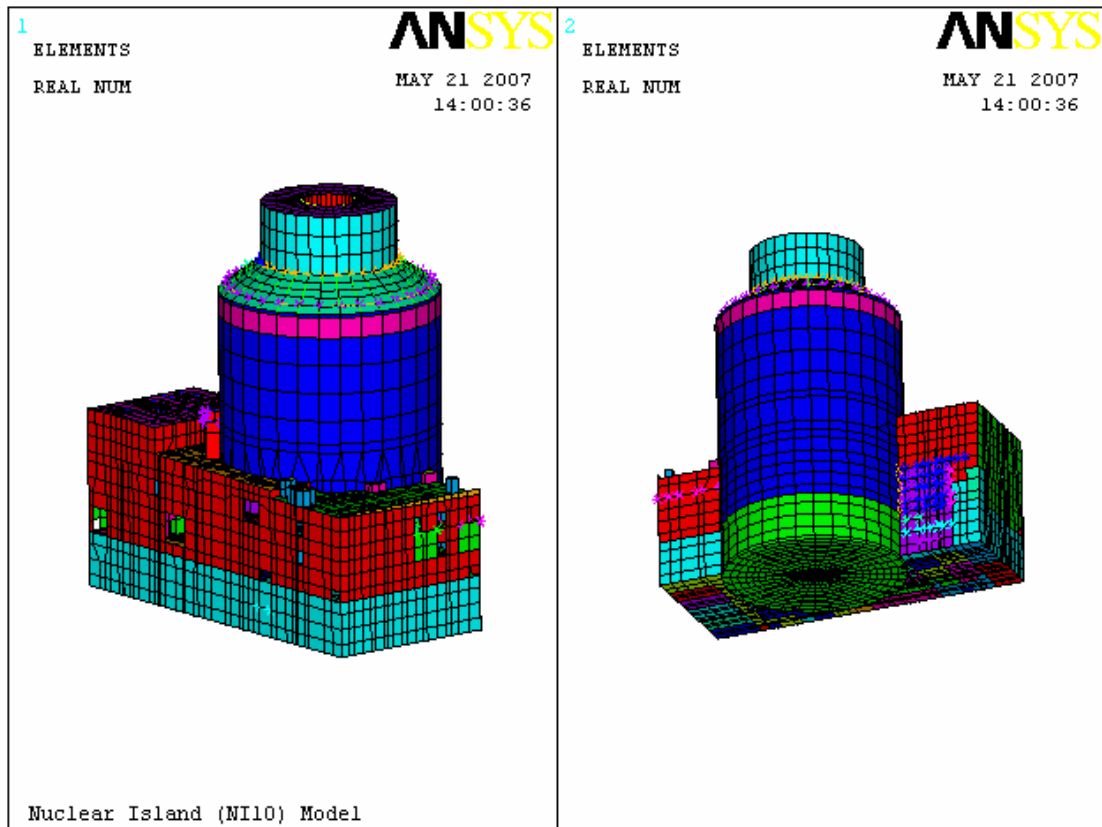


Figure 3G.2-9

AP1000 Nuclear Island Solid-Shell Model (NI10)


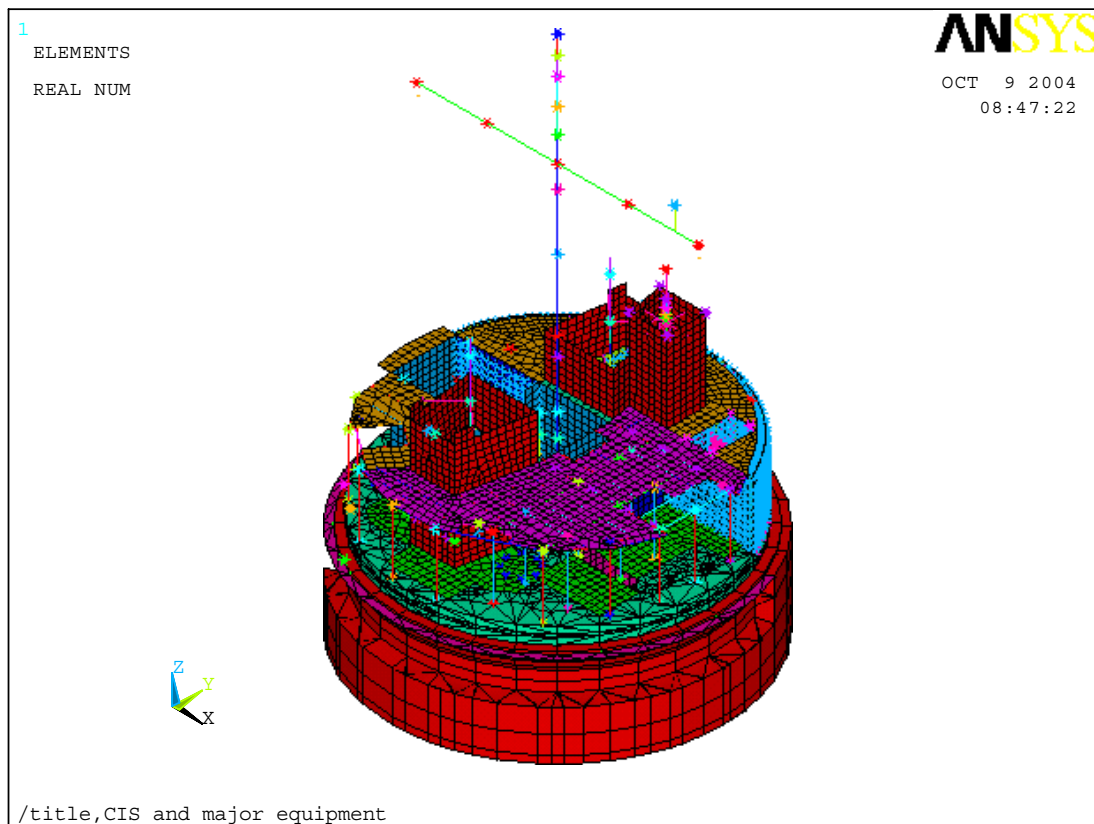


Figure 3G.2-10

**Containment Internal Structure with the SCV, PC,
Reactor Coolant Loop, and Pressurizer**

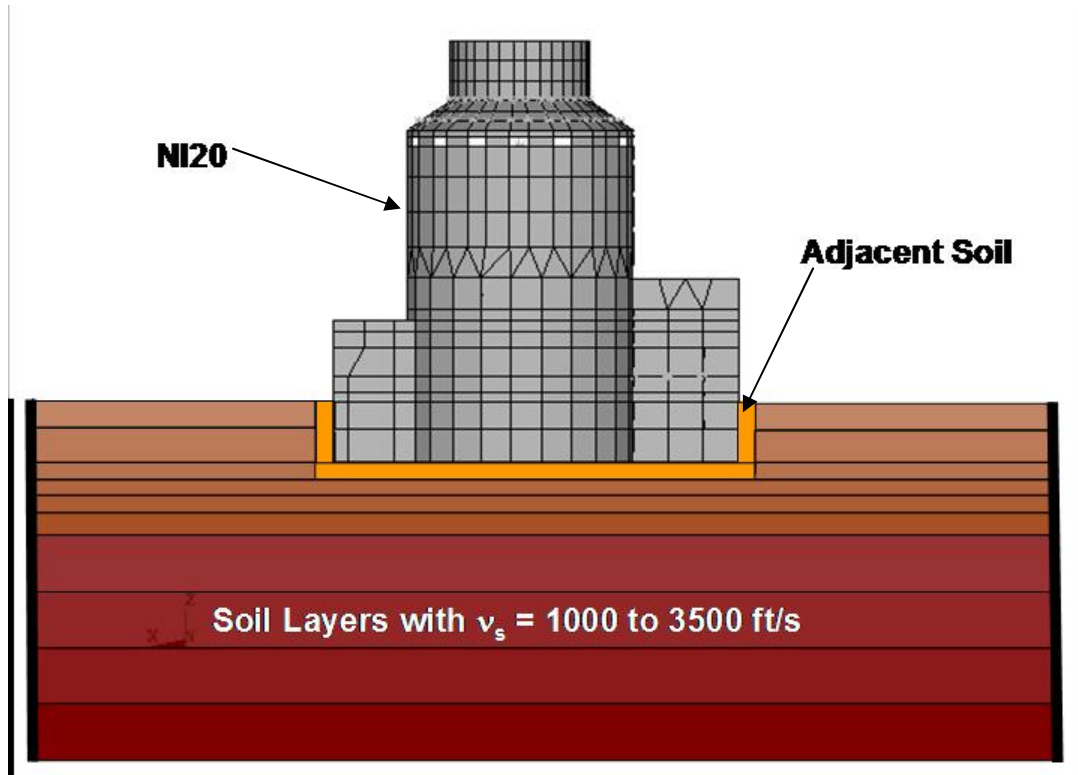

Note: The adjacent soil elements are part of the structural portion of SASSI and have the same material properties as the soil. These elements are used to obtain soil lateral and bearing soil pressures.

Figure 3G.2-11

Soil Structure Interaction Model – NI20 Looking East



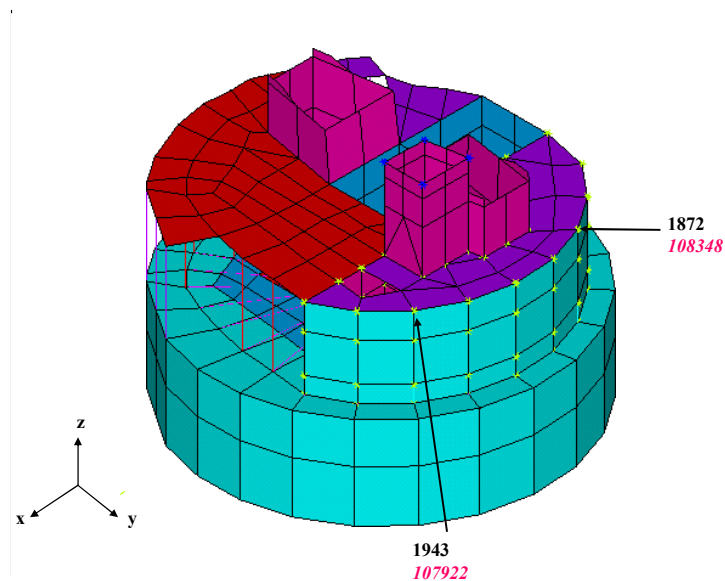


Figure 3G.2-12

Coarse Model of Containment Internal Structures

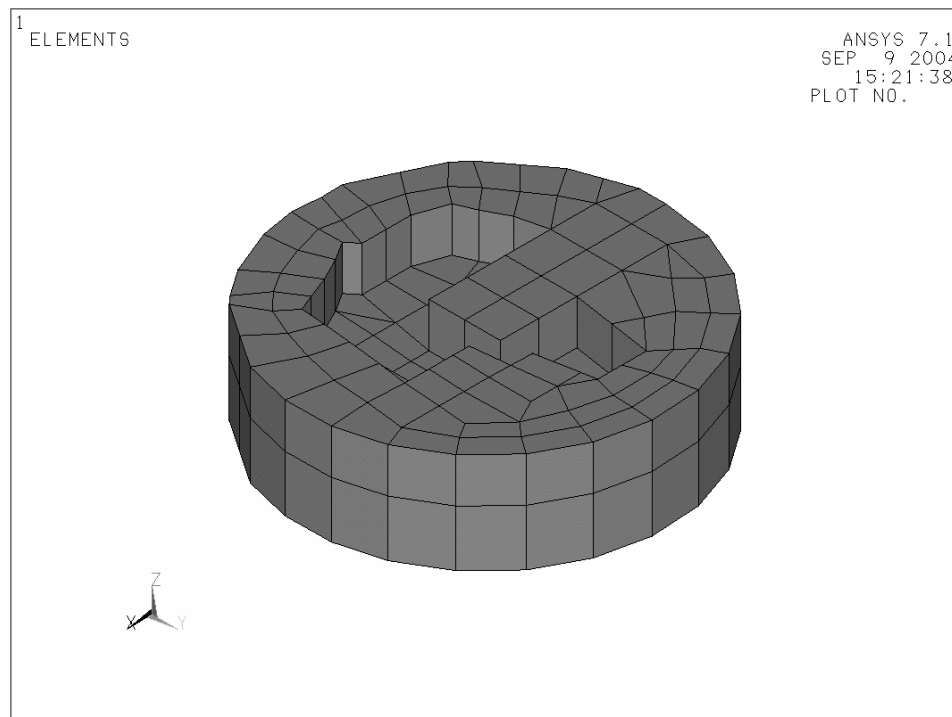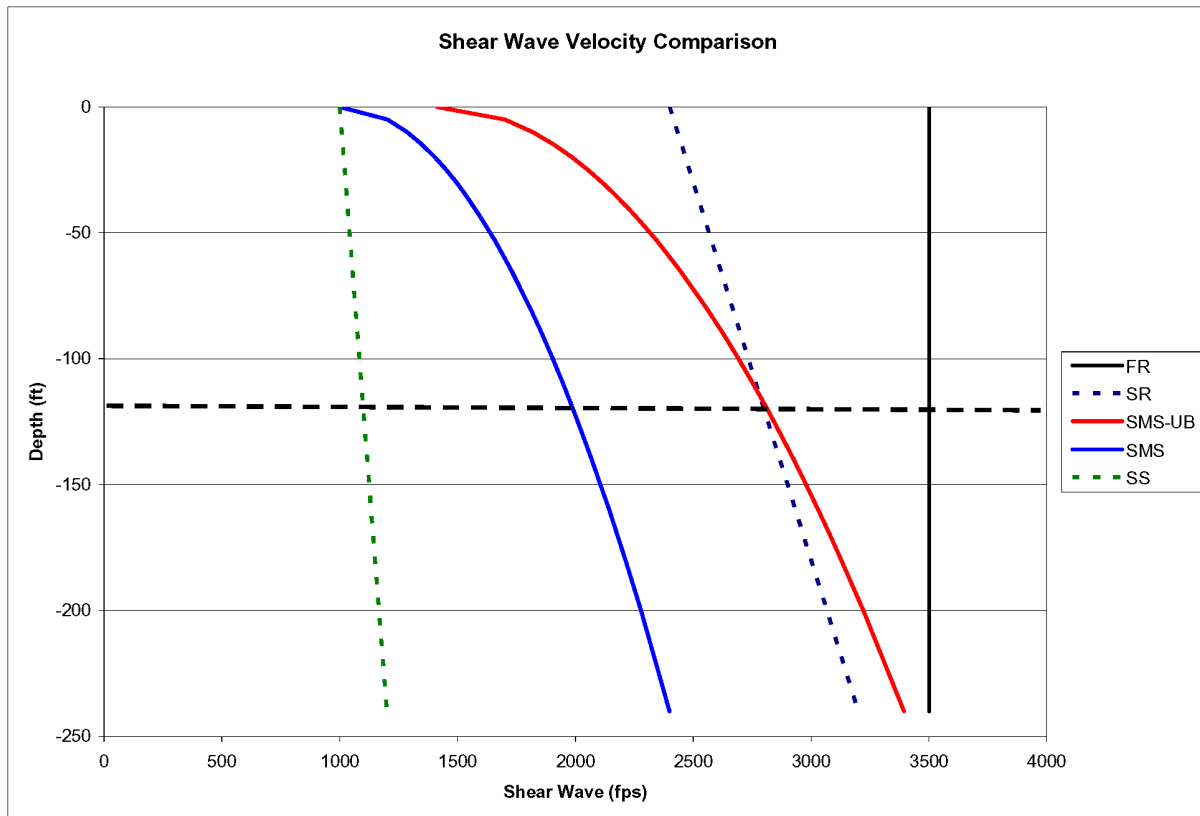

Note: Fixed base analyses were performed for hard rock sites. These analyses are applicable for shear wave velocity greater than 8000 feet per second.

Figure 3G.3-1

Generic Soil Profiles

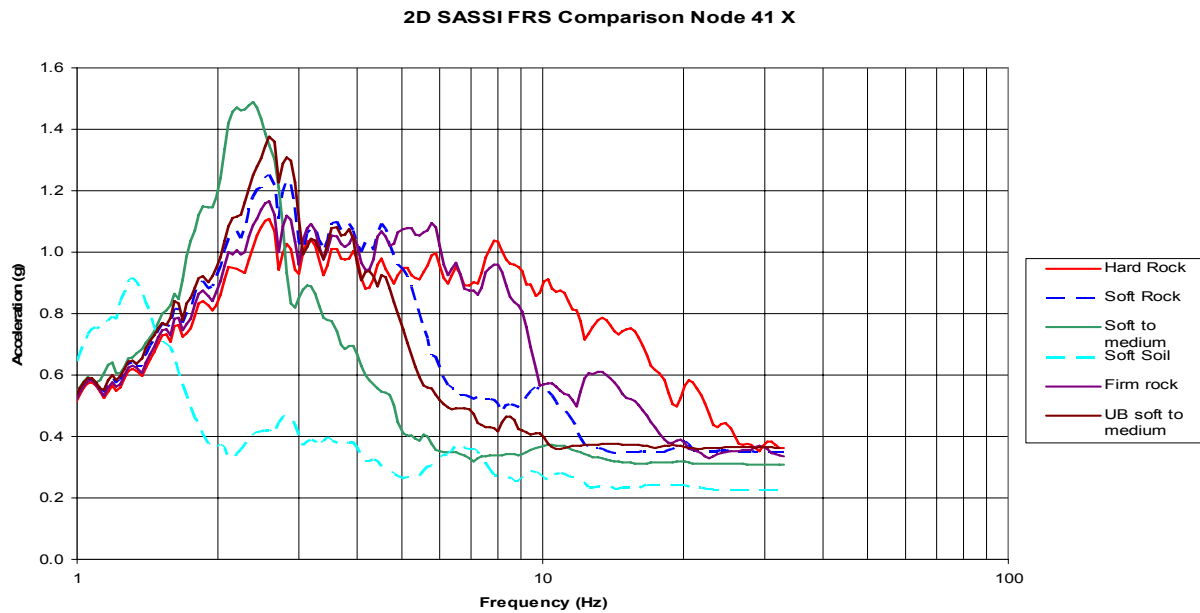


Figure 3G.3-2

2D SASSI FRS – Node 41 X (ASB El. 99')

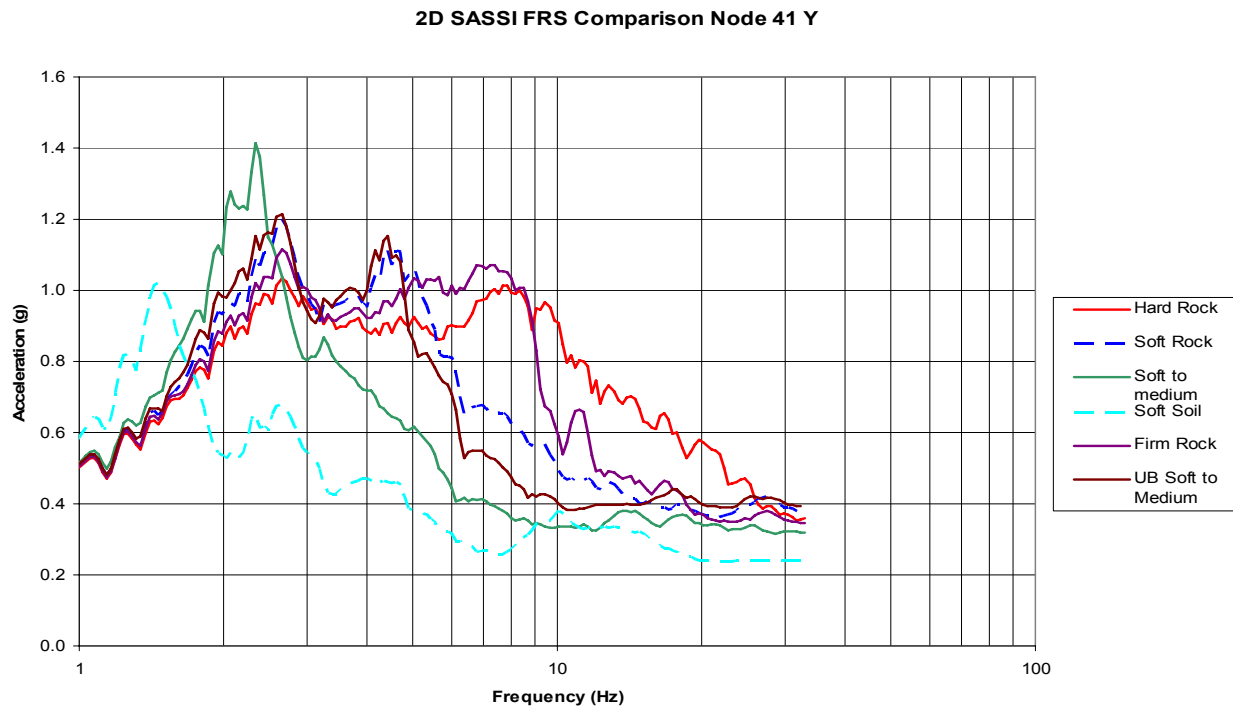


Figure 3G.3-3

2D SASSI FRS – Node 41Y (ASB El. 99')

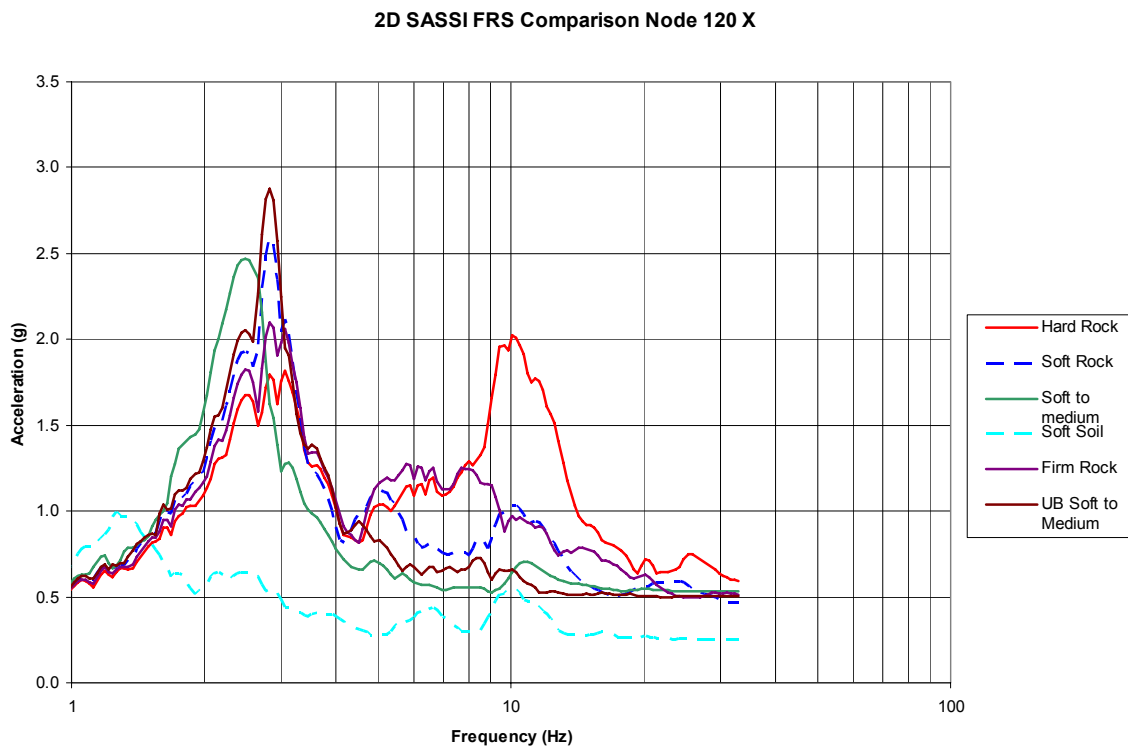


Figure 3G.3-4

2D SASSI FRS – Node 120 X (ASB El. 179.6')

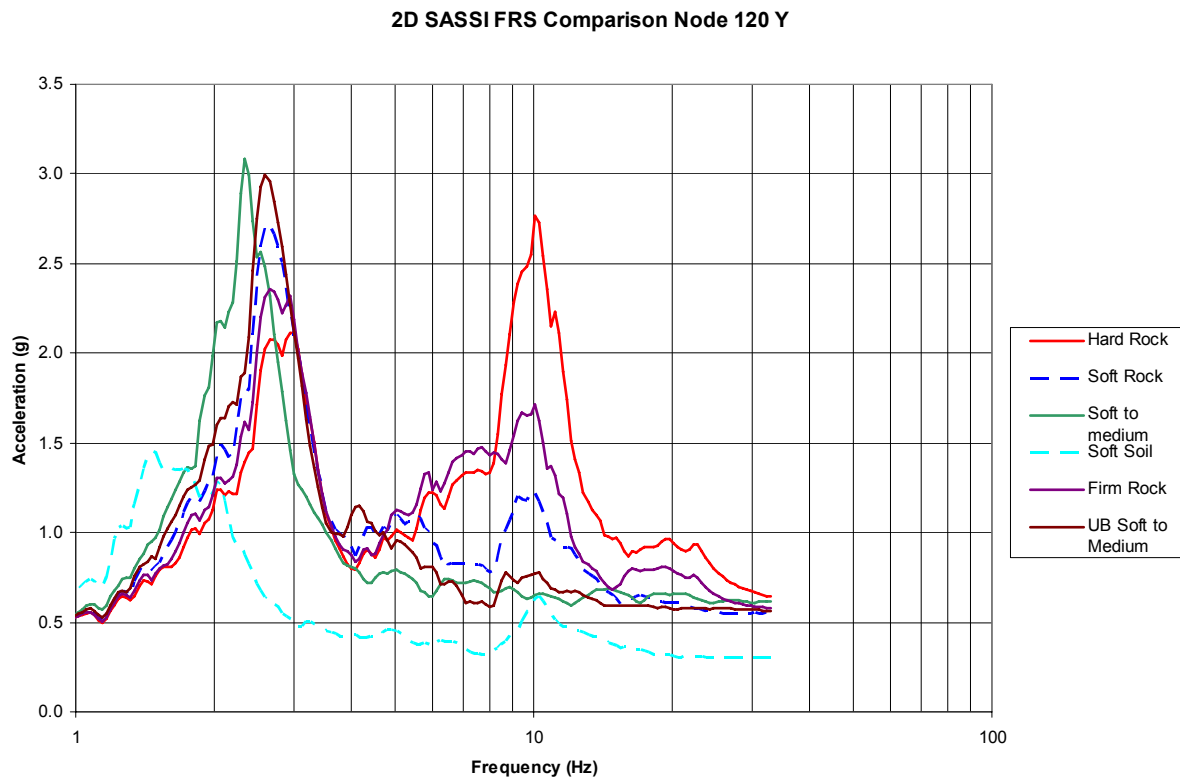


Figure 3G.3-5

2D SASSI FRS – Node 120 Y (ASB EL. 179.6')

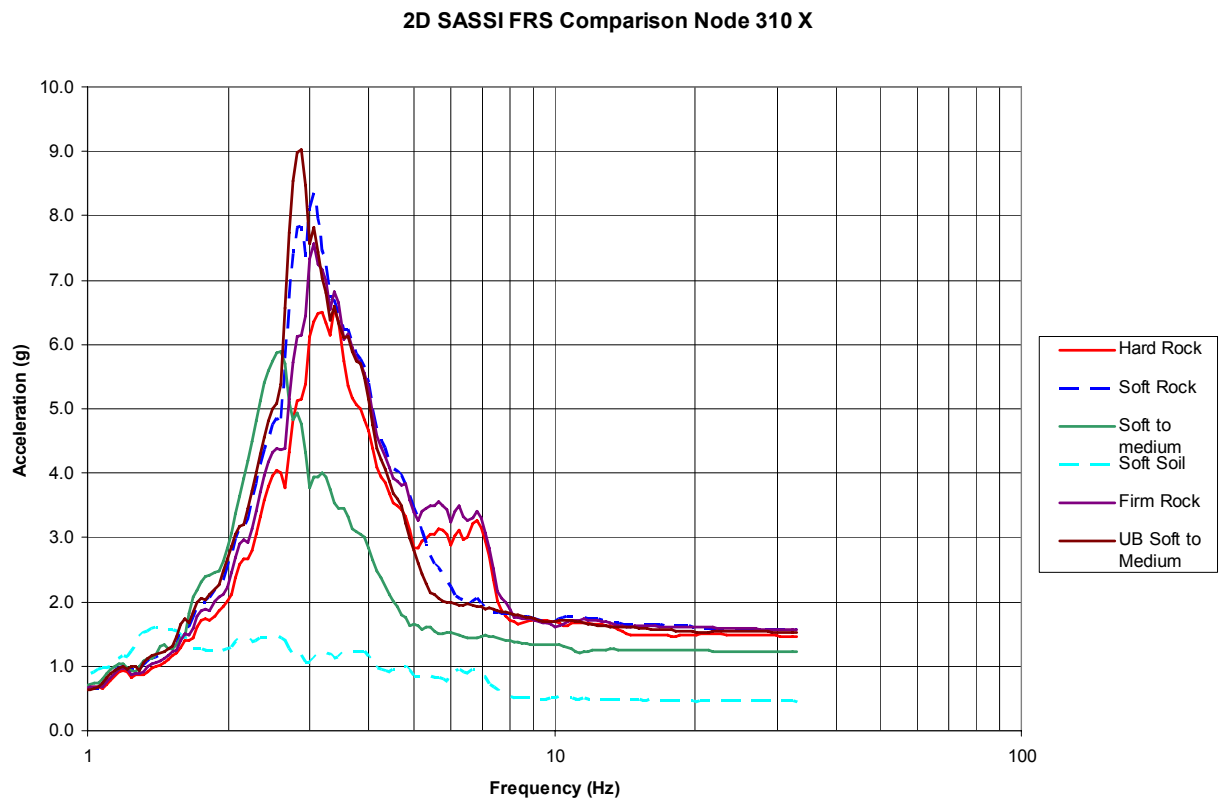


Figure 3G.3-6

2D SASSI FRS – Node 310 X (ASB El. 333.2')

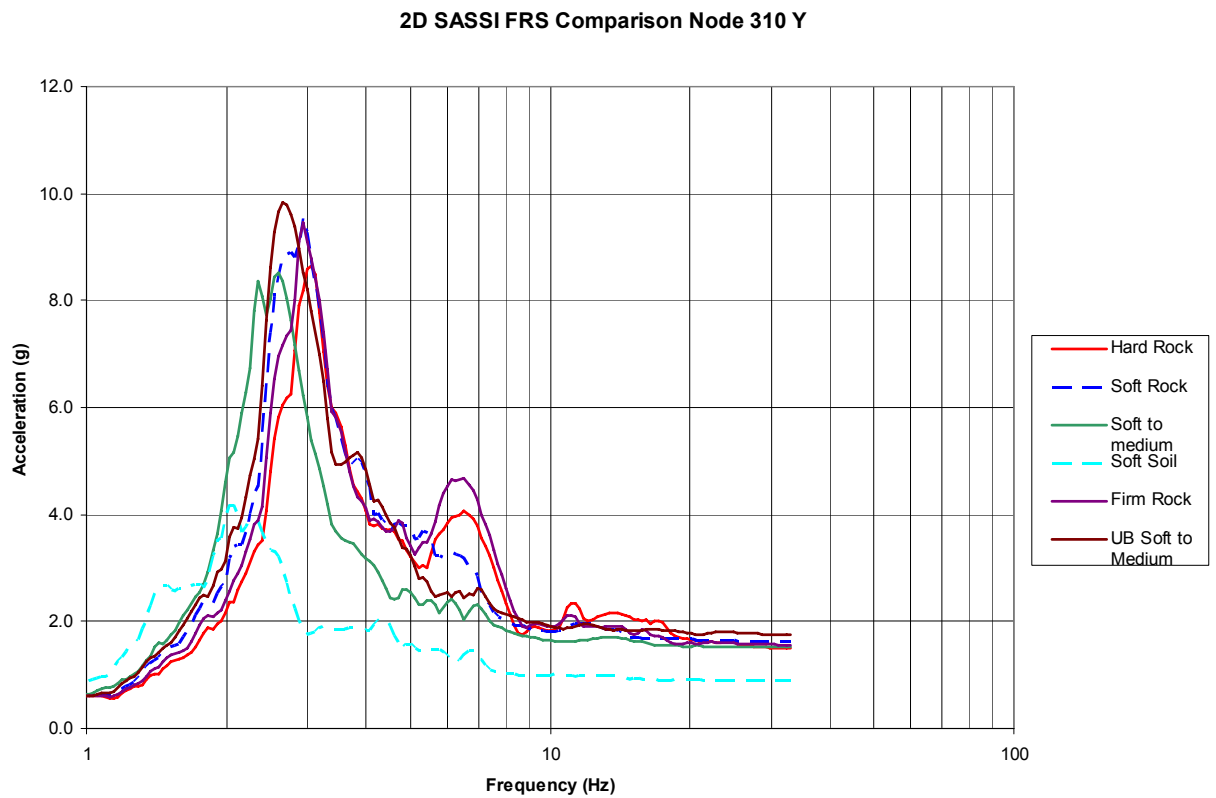


Figure 3G.3-7

2D SASSI FRS – Node 310 Y (ASB El. 333.2')

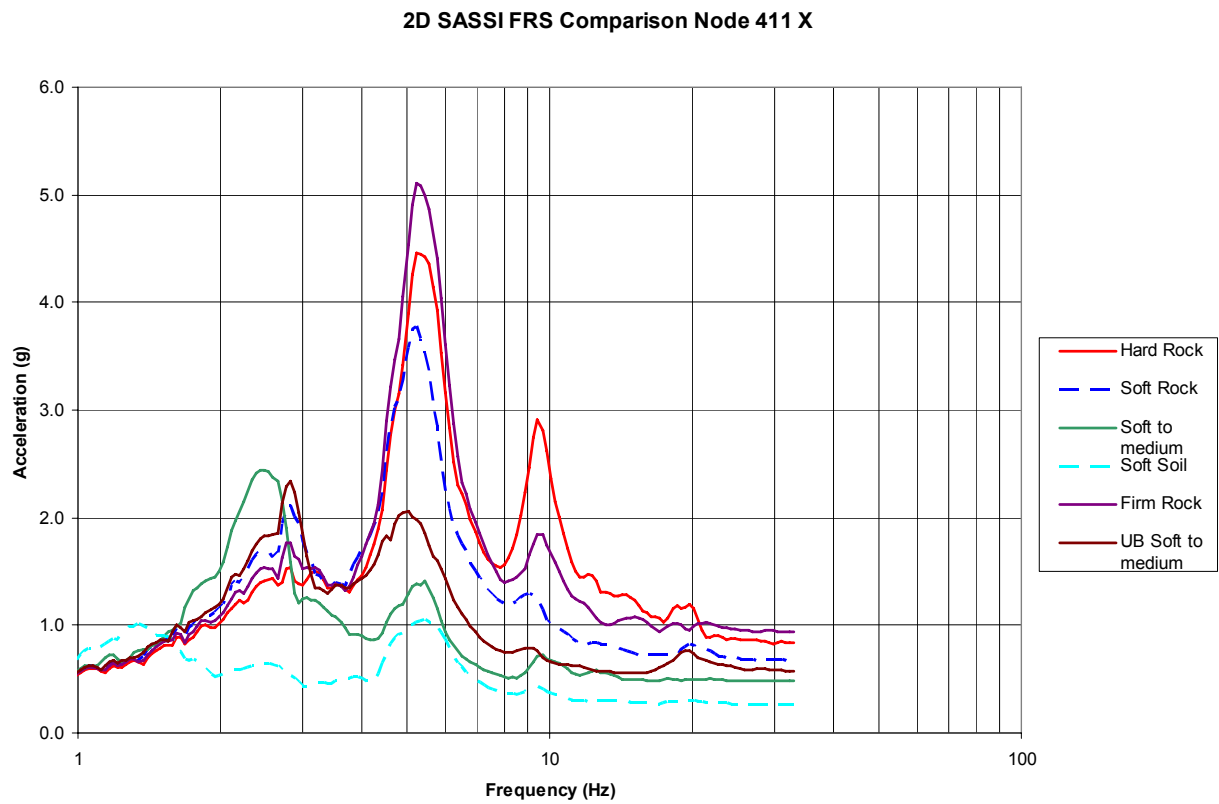


Figure 3G.3-8

2D SASSI FRS – Node 411 X (SCV El. 200.0')

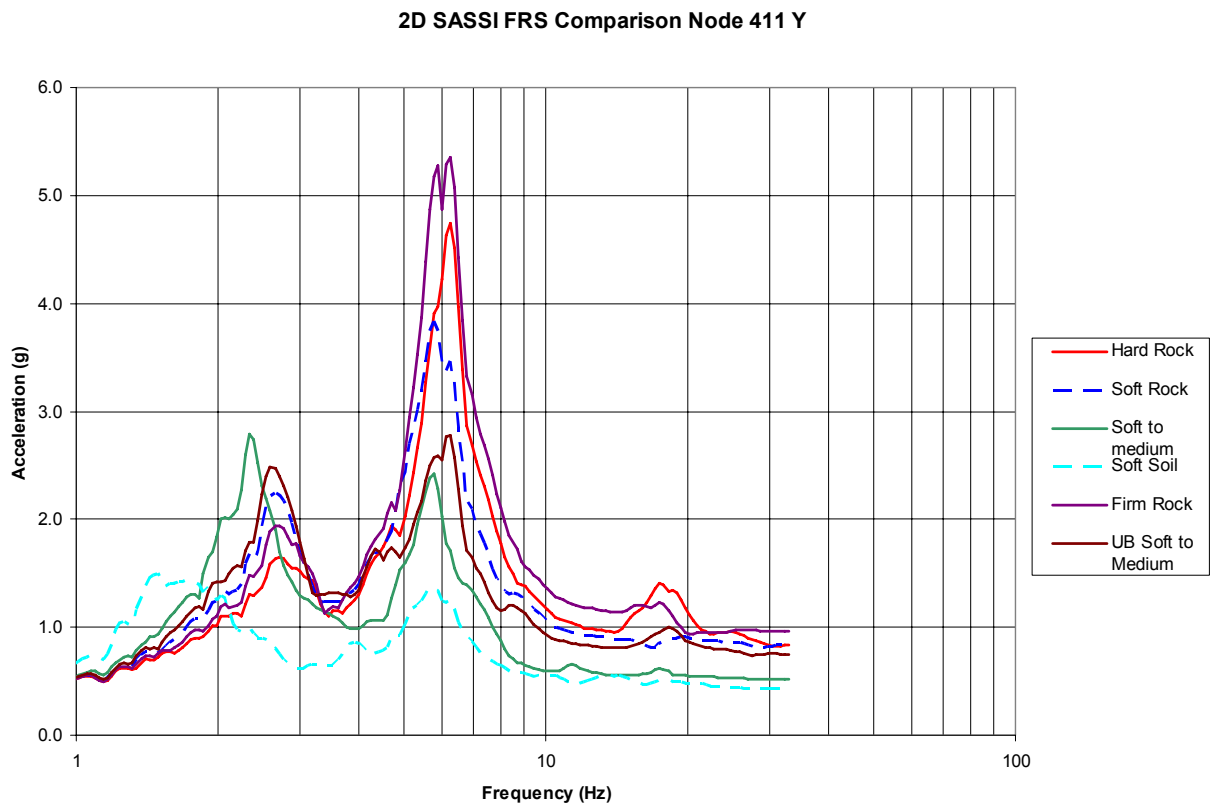


Figure 3G.3-9

2D SASSI FRS – Node 411 Y (SCV El. 200.0')

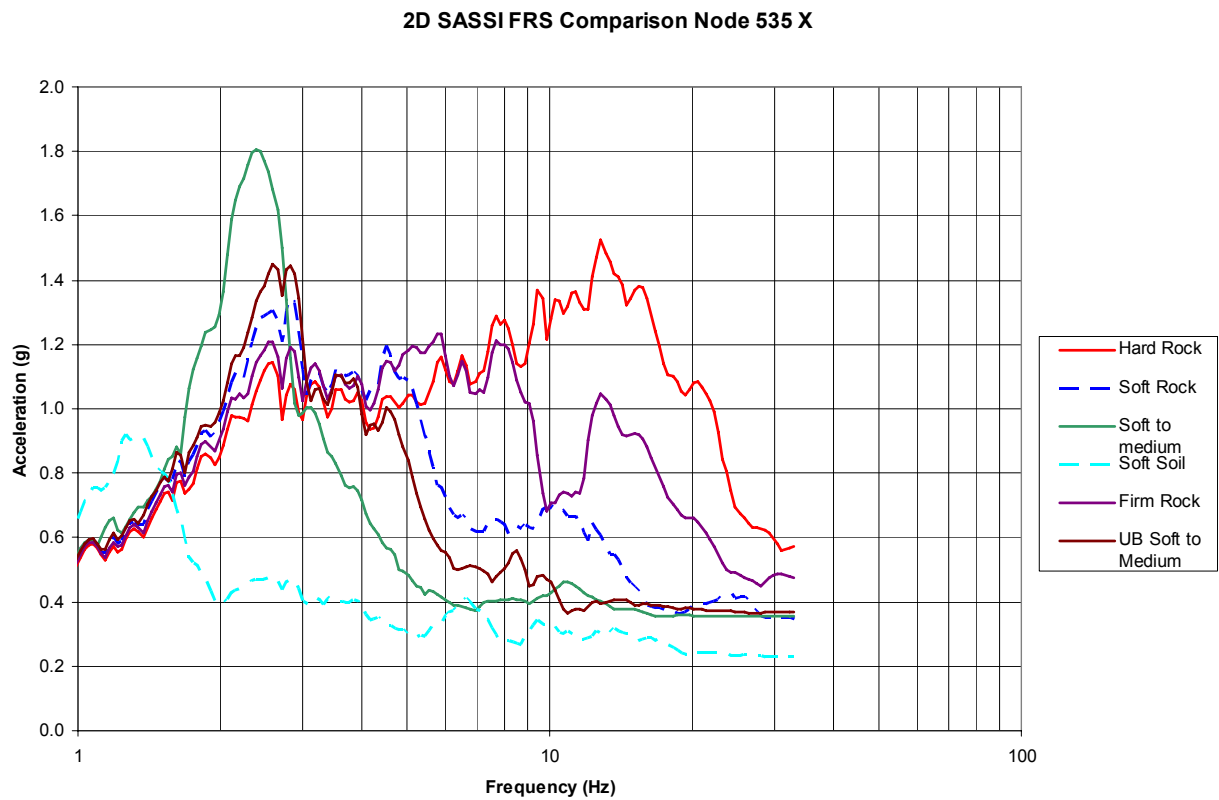


Figure 3G.3-10

2D SASSI FRS – Node 535 X (CIS El. 134.3')

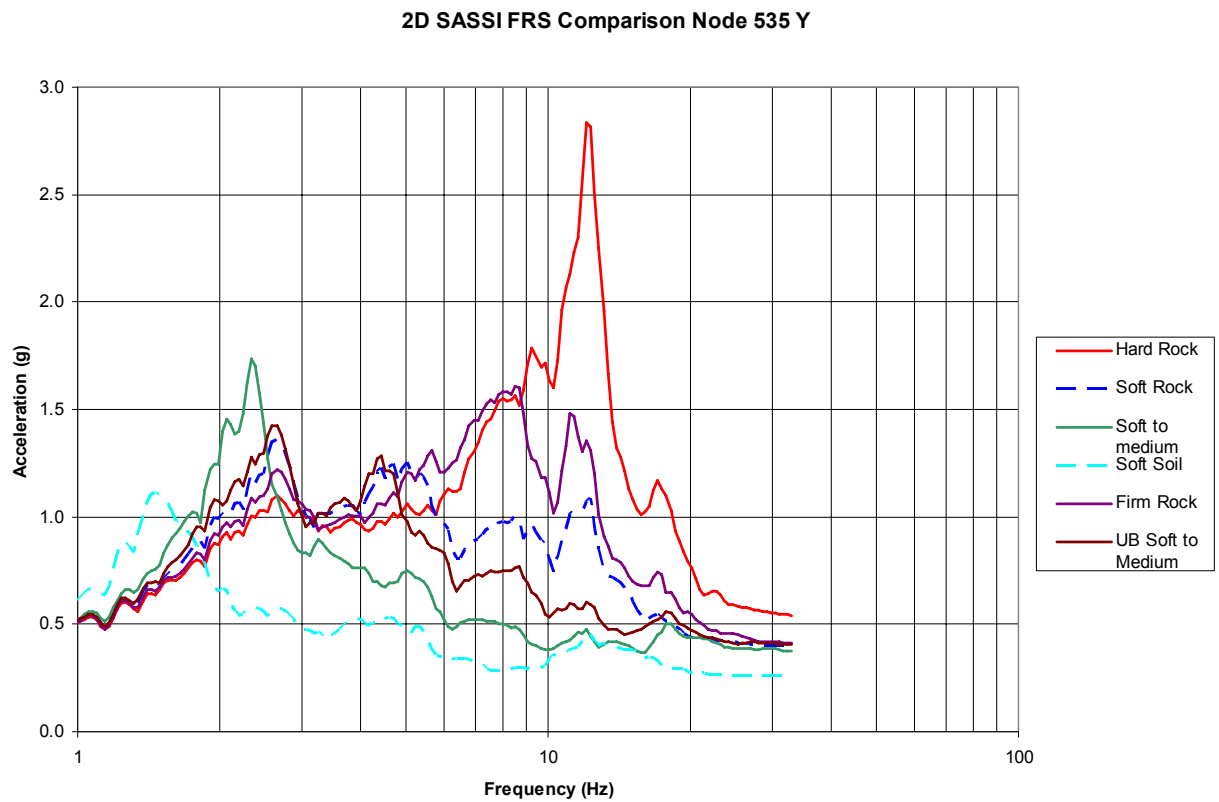


Figure 3G.3-11

2D SASSI FRS – Node 535 Y (CIS El. 134.3')

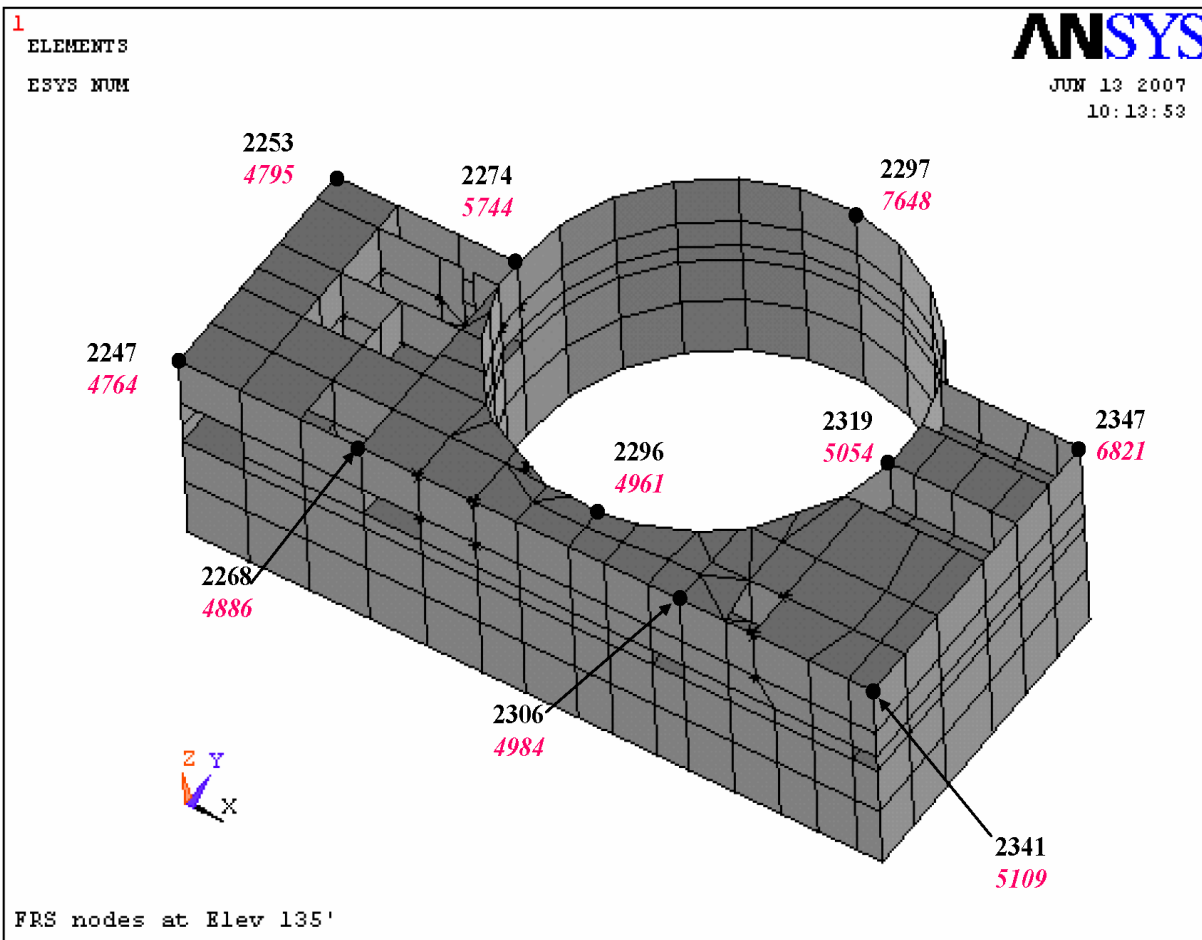


Figure 3G.4-1

Auxiliary Shield Building “Rigid” Nodes at El. 135’

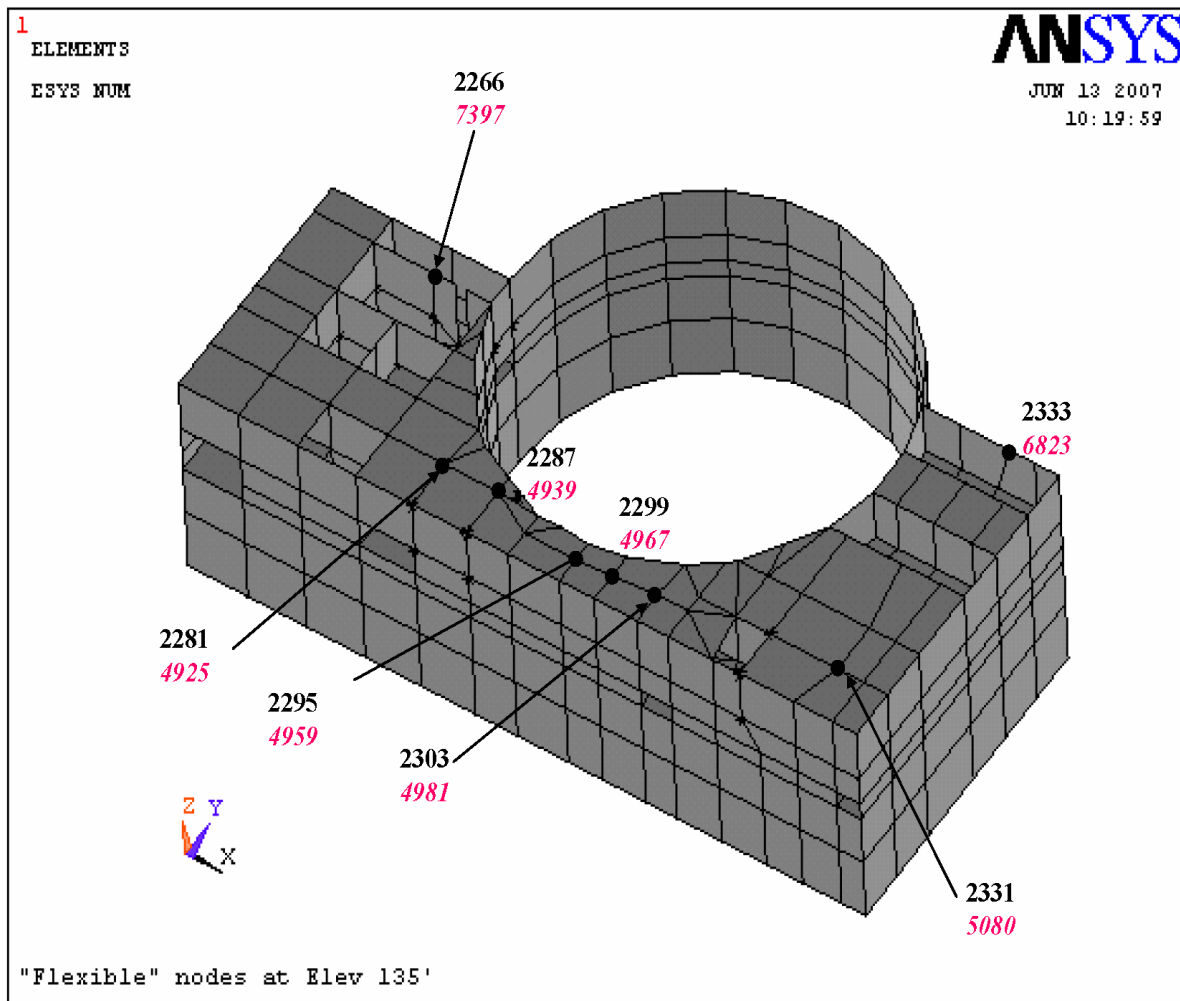


Figure 3G.4-2

Auxiliary Shield Building "Flexible" Nodes at El. 135'

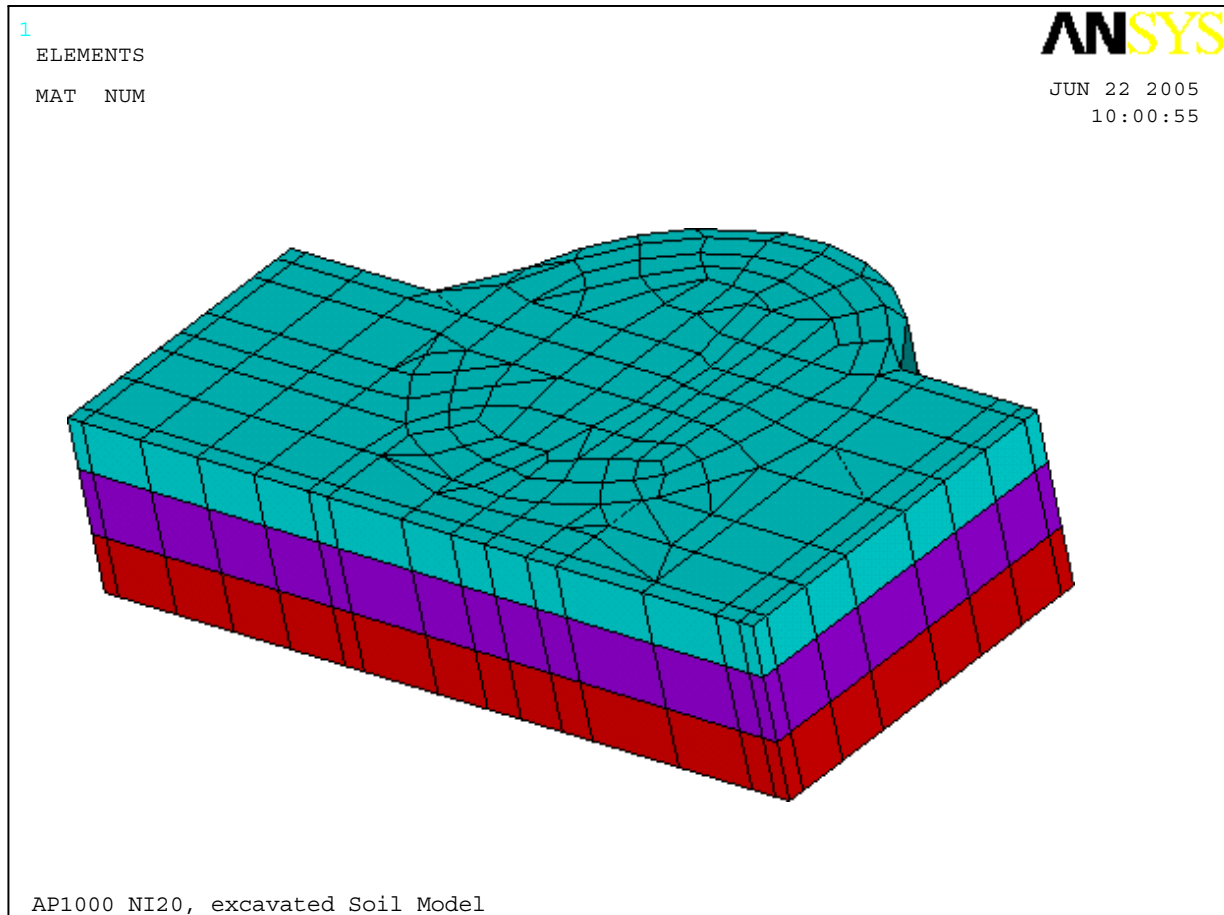


Figure 3G.4-3

Excavated Soil

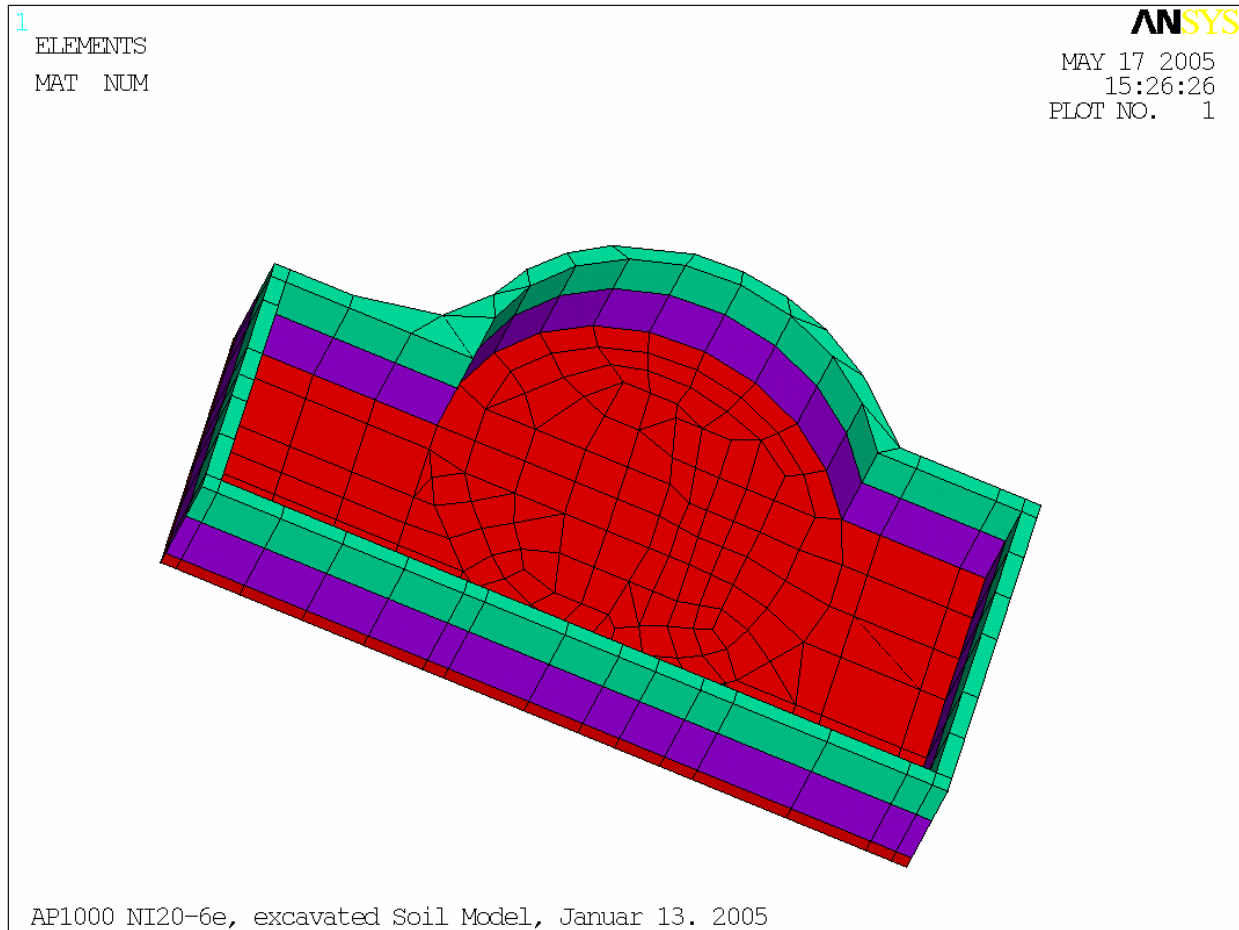


Figure 3G.4-4

Additional Elements for Soil Pressure Calculations

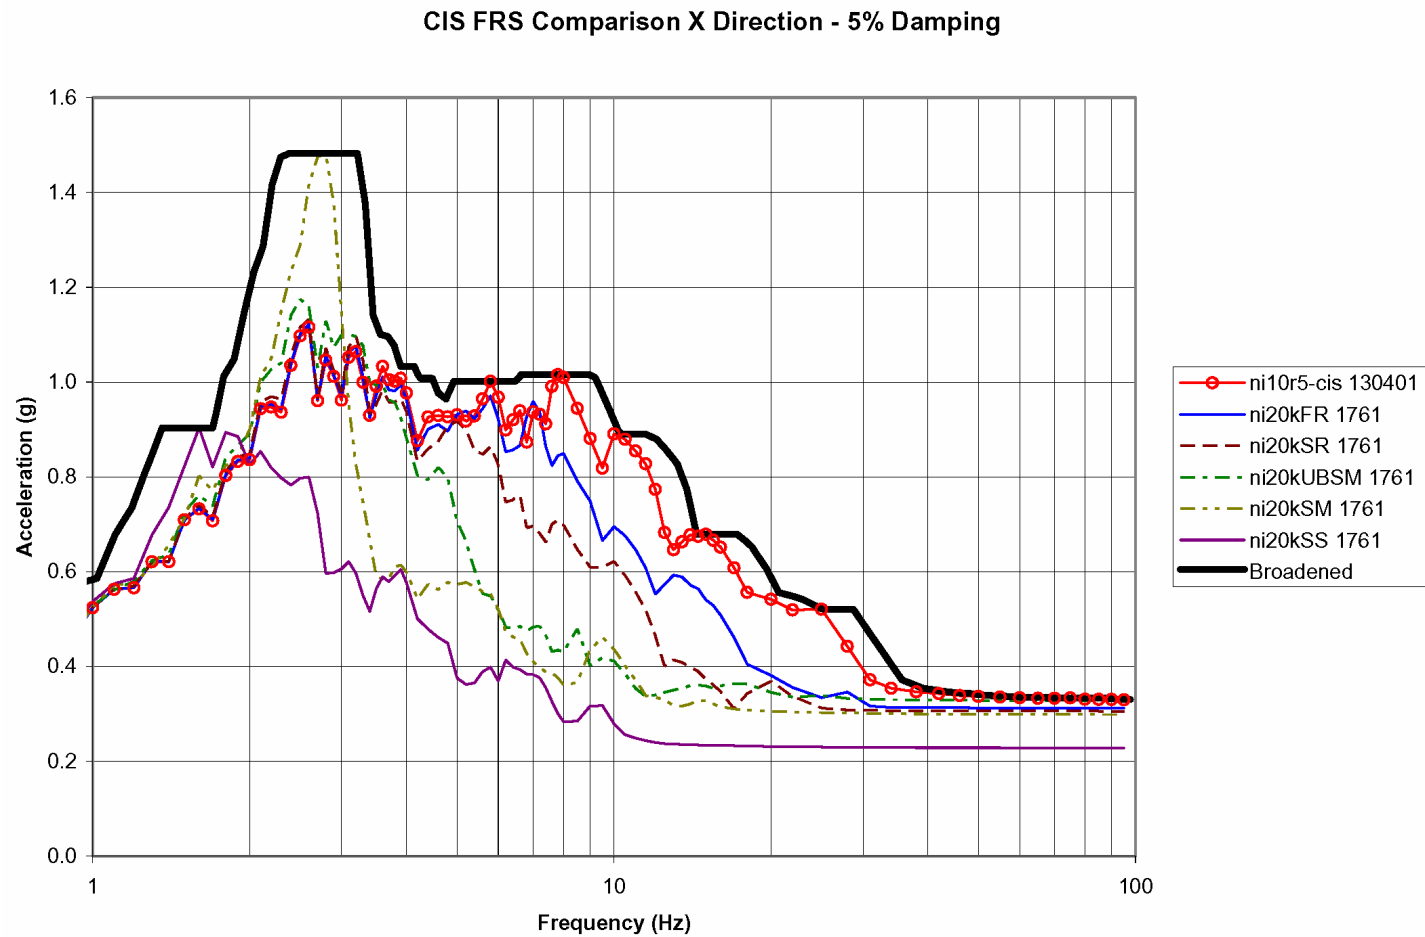


Figure 3G.4-5X

**X Direction FRS for Node 130401 (NI10) or 1761 (NI20)
CIS at Reactor Vessel Support Elevation of 100'**

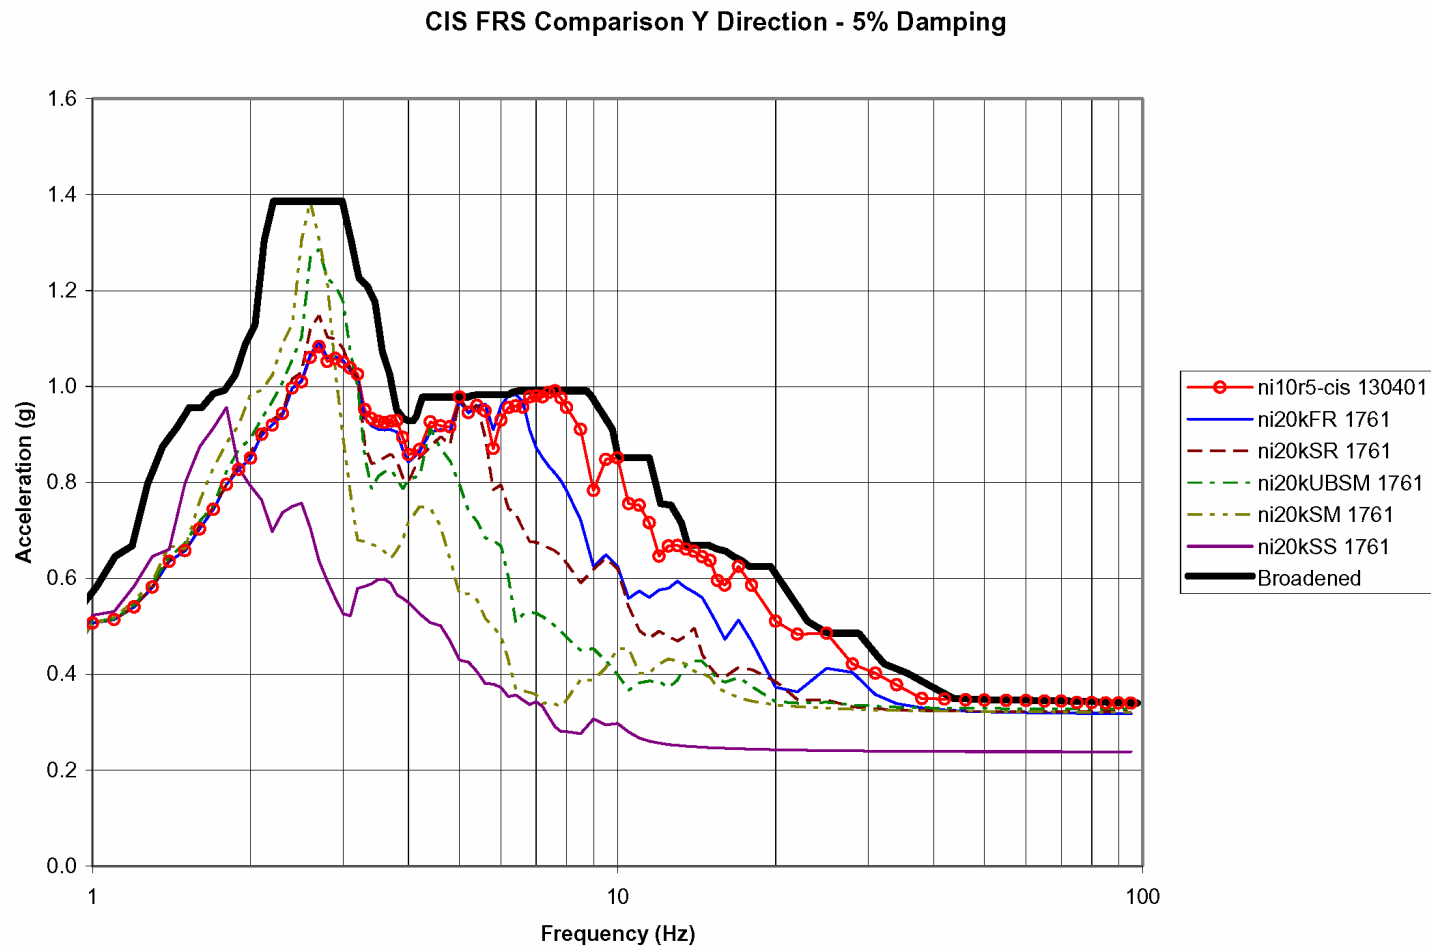


Figure 3G.4-5Y

**Y Direction FRS for Node 130401 (NI10) or 1761 (NI20)
CIS at Reactor Vessel Support Elevation of 100'**

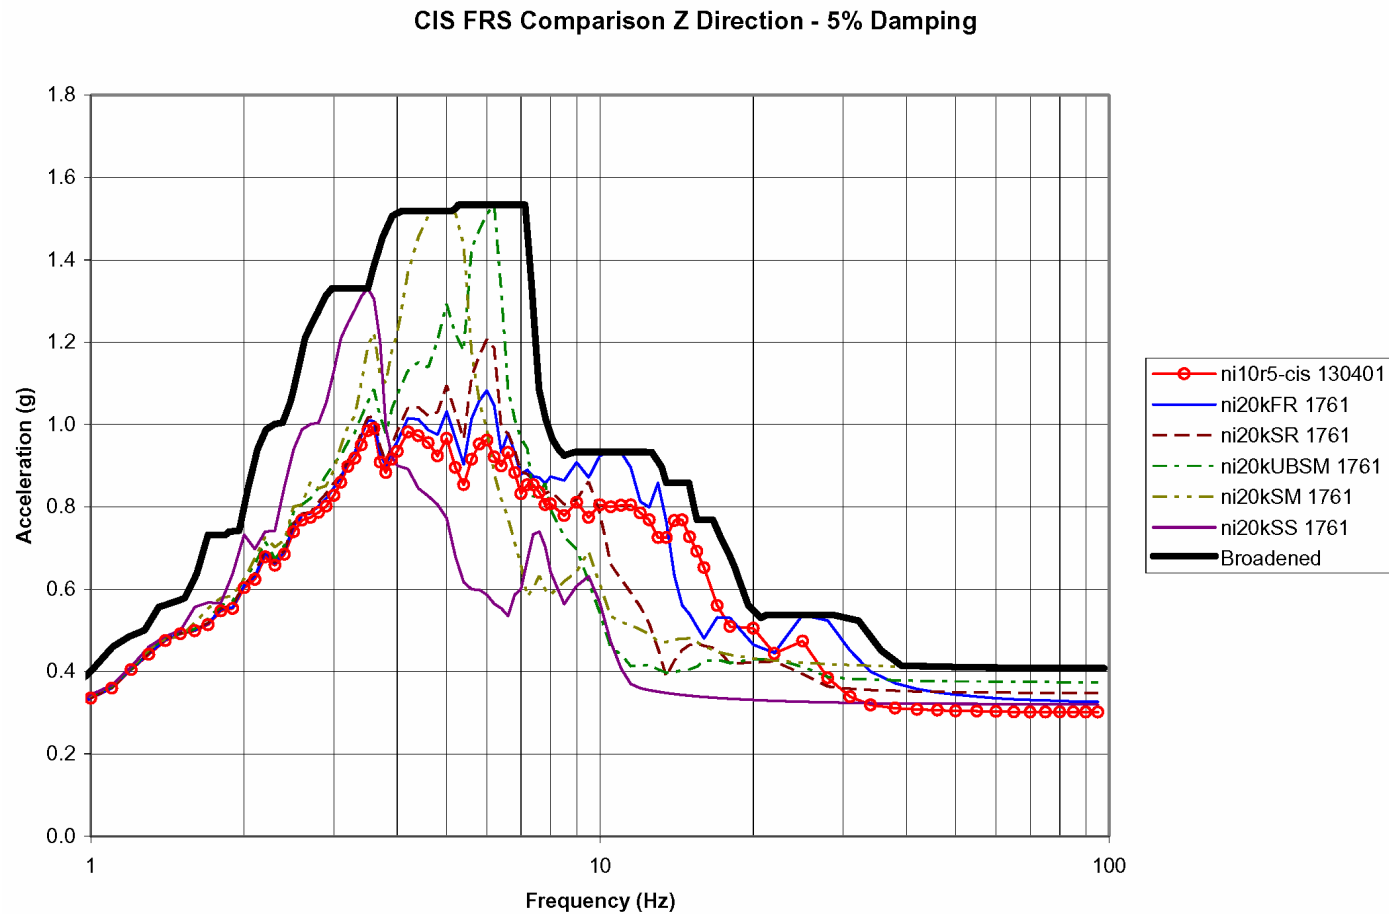


Figure 3G.4-5Z

**Z Direction FRS for Node 130401 (NI10) or 1761 (NI20)
CIS at Reactor Vessel Support Elevation of 100'**

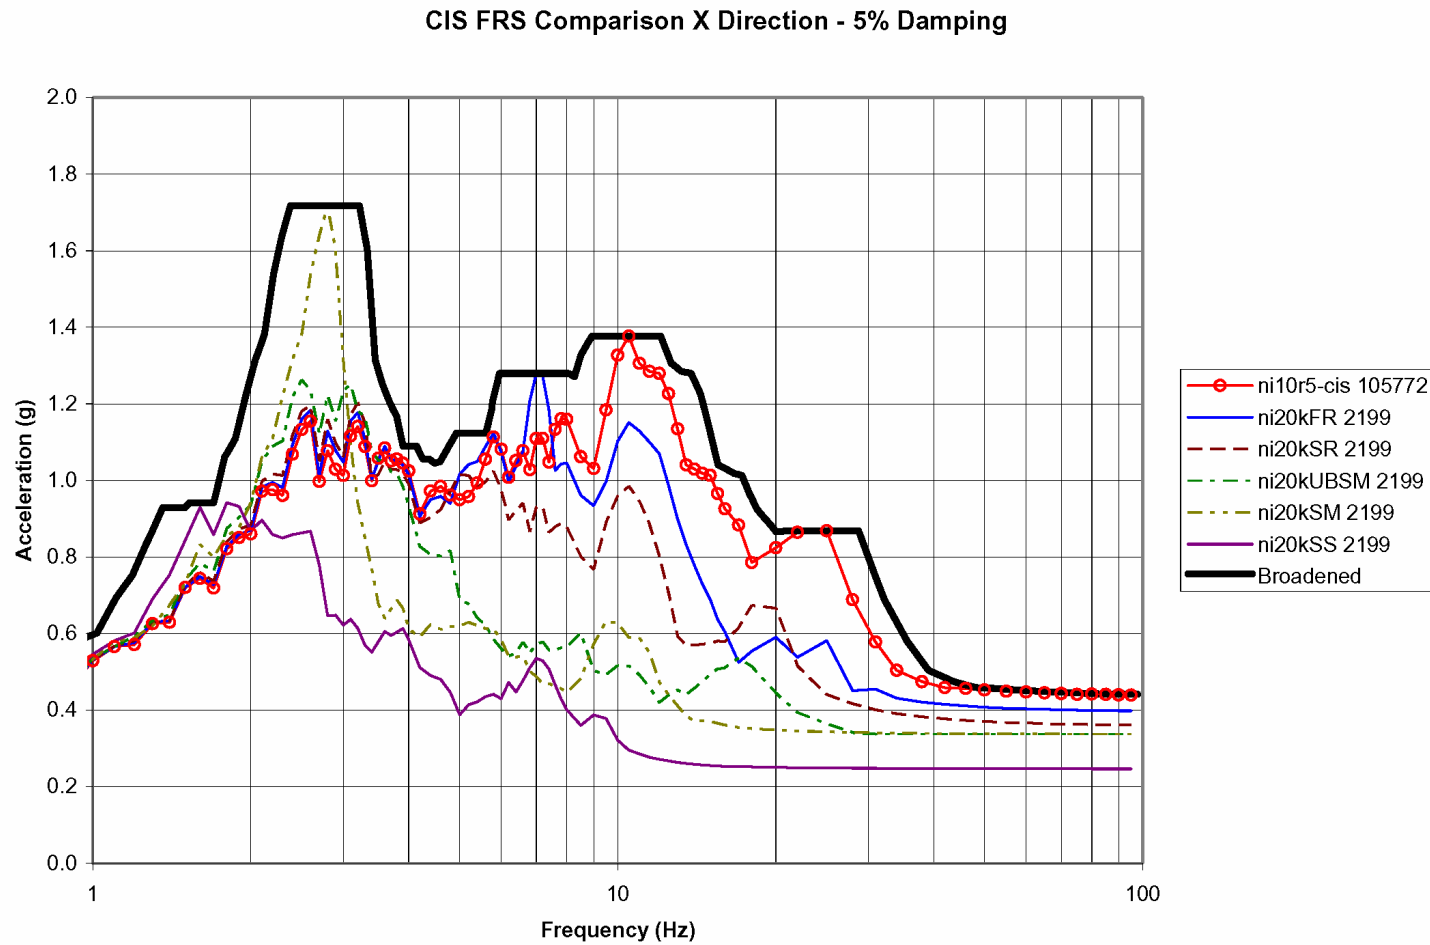


Figure 3G.4-6X

**X Direction FRS for Node 105772 (NI10) or 2199 (NI20)
CIS at Operating Deck Elevation 134.25'**

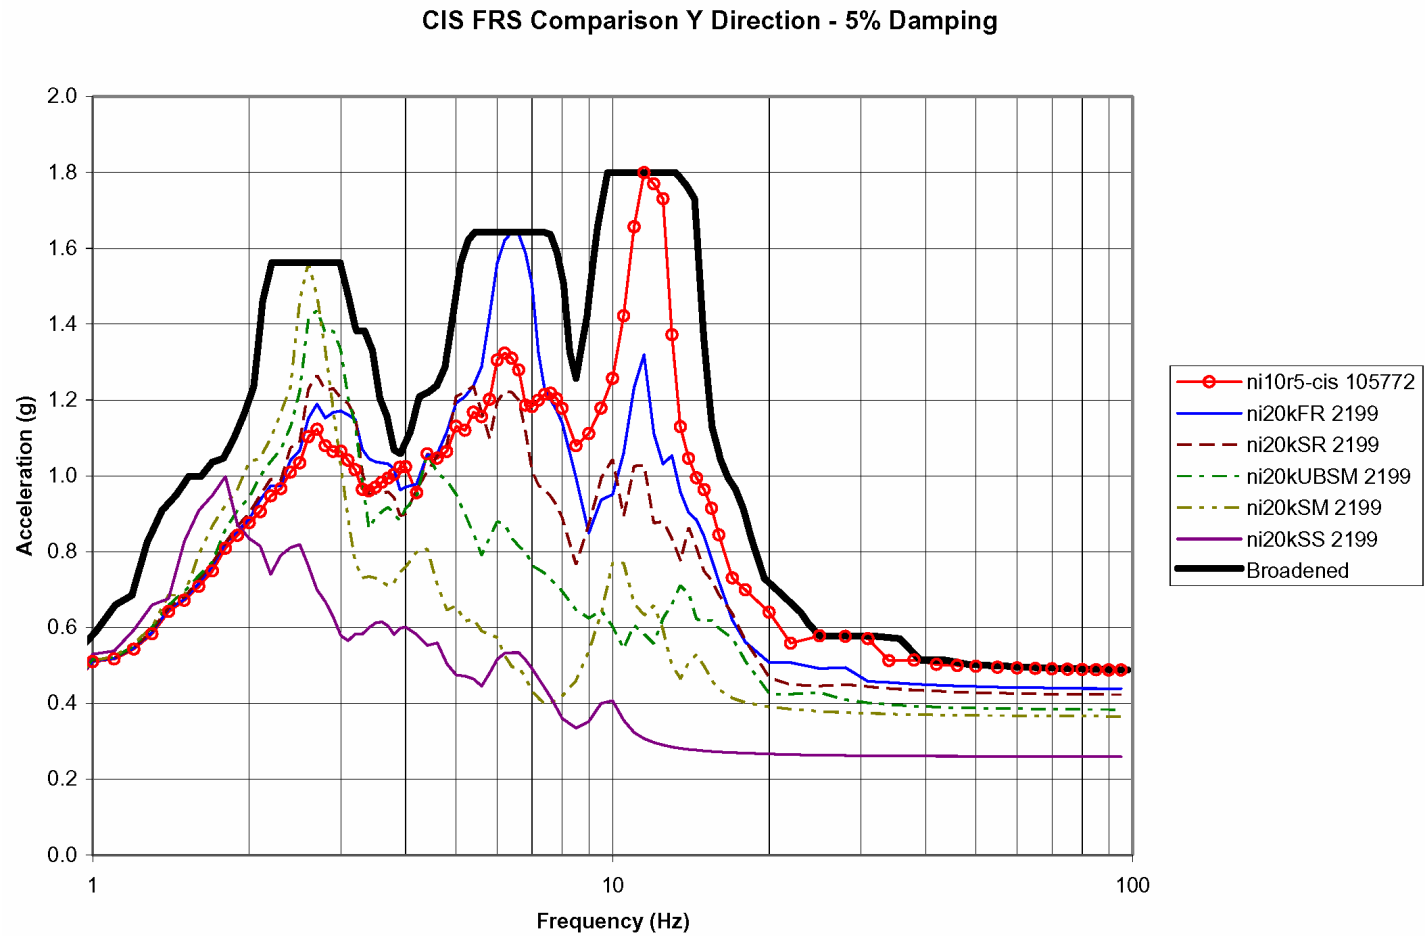


Figure 3G.4-6Y

**Y Direction FRS for Node 105772 (NI10) or 2199 (NI20)
CIS at Operating Deck Elevation 134.25'**

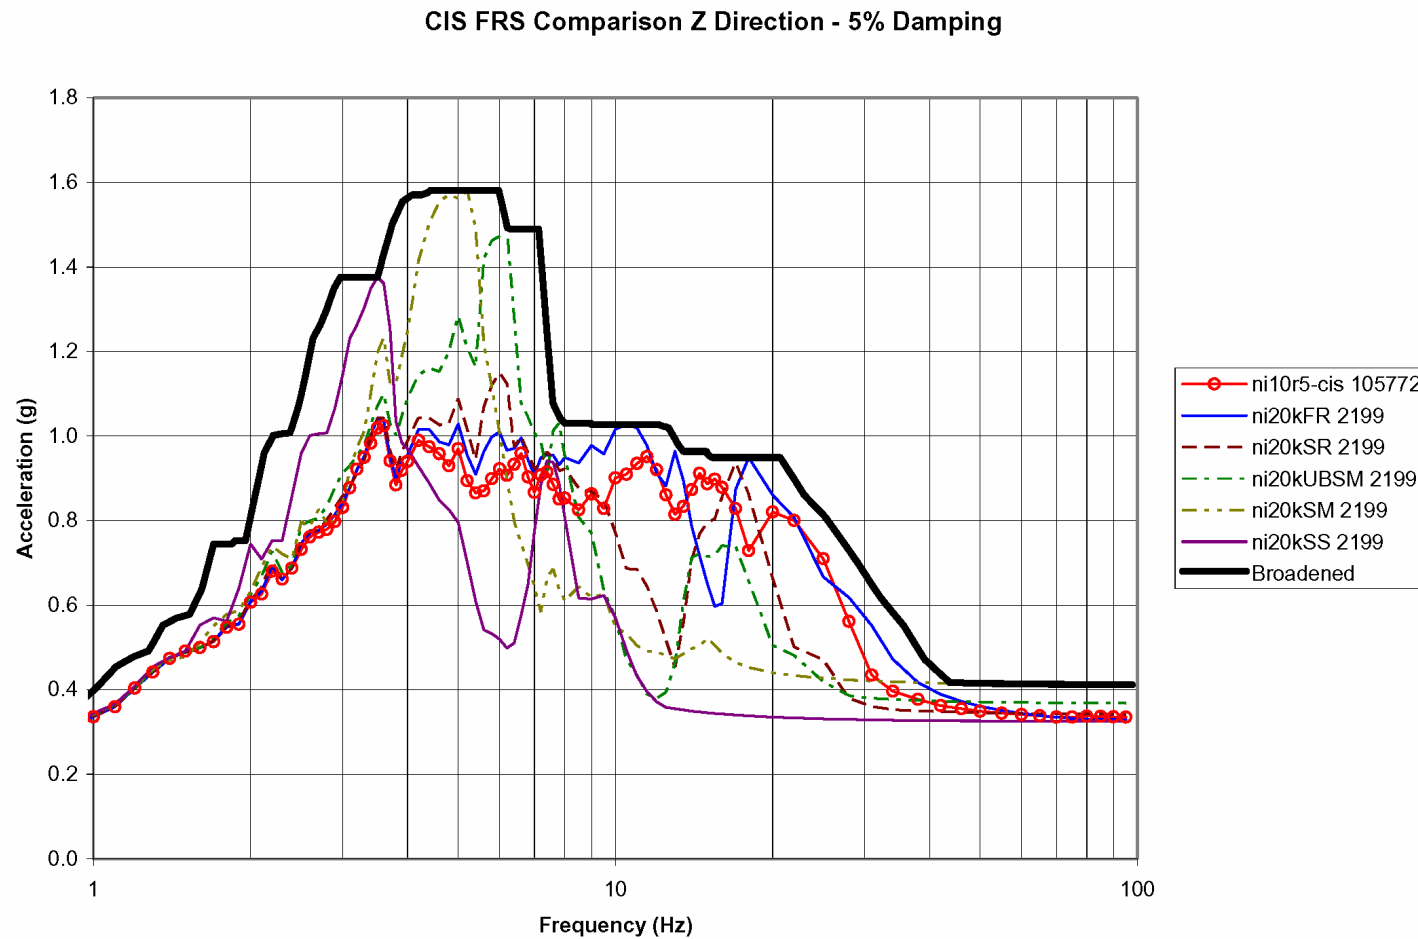


Figure 3G.4-6Z

**Z Direction FRS for Node 105772 (NI10) or 2199 (NI20)
CIS at Operating Deck Elevation 134.25'**

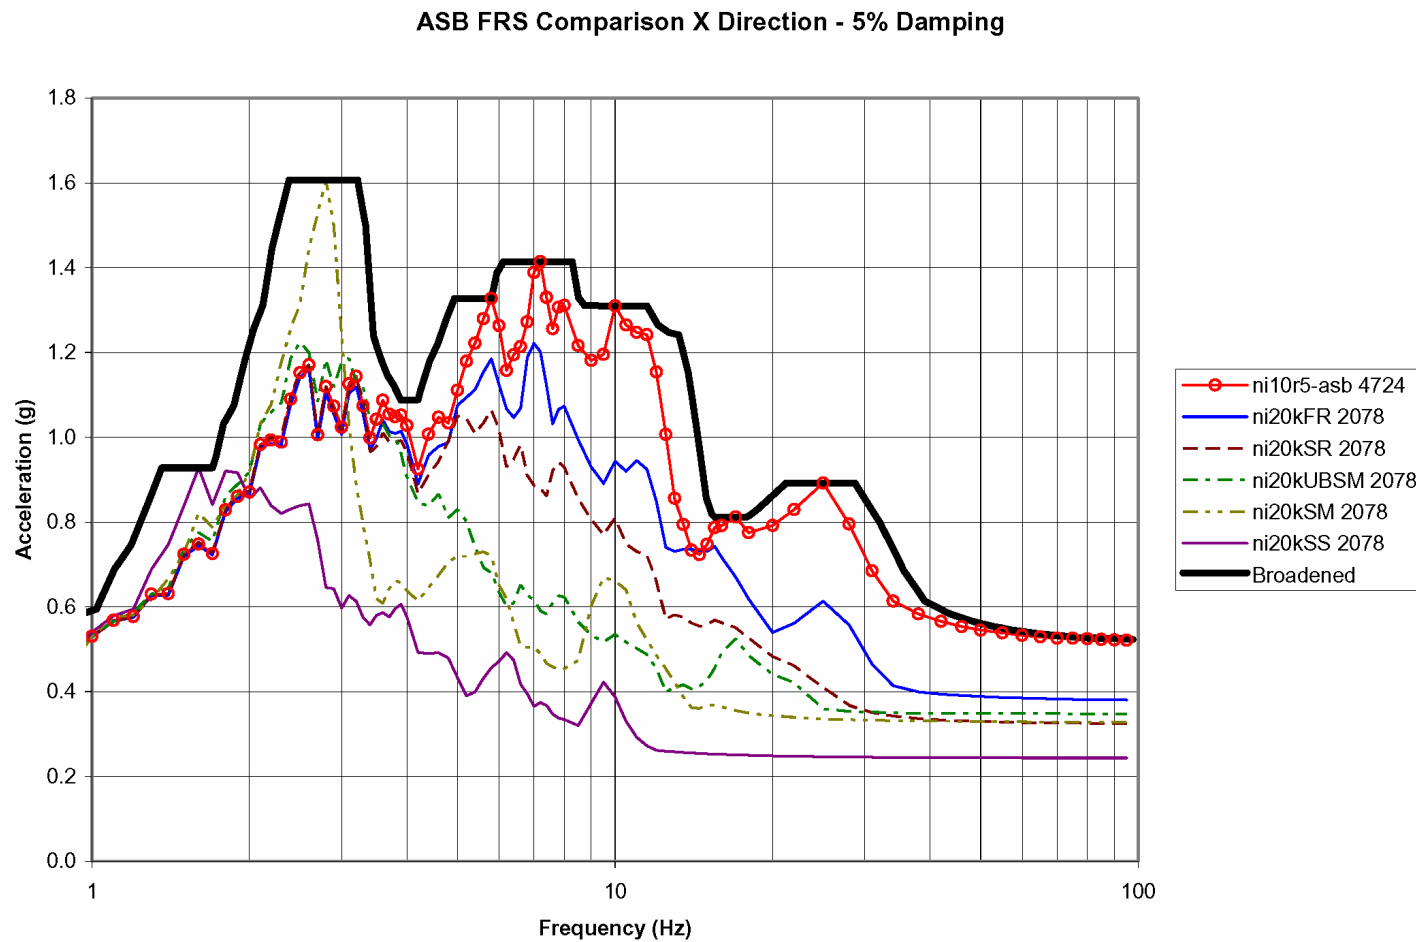


Figure 3G.4-7X

**X Direction FRS for Node 4724 (NI10) or 2078 (NI20)
ASB Control Room Side Elevation 116.50'**

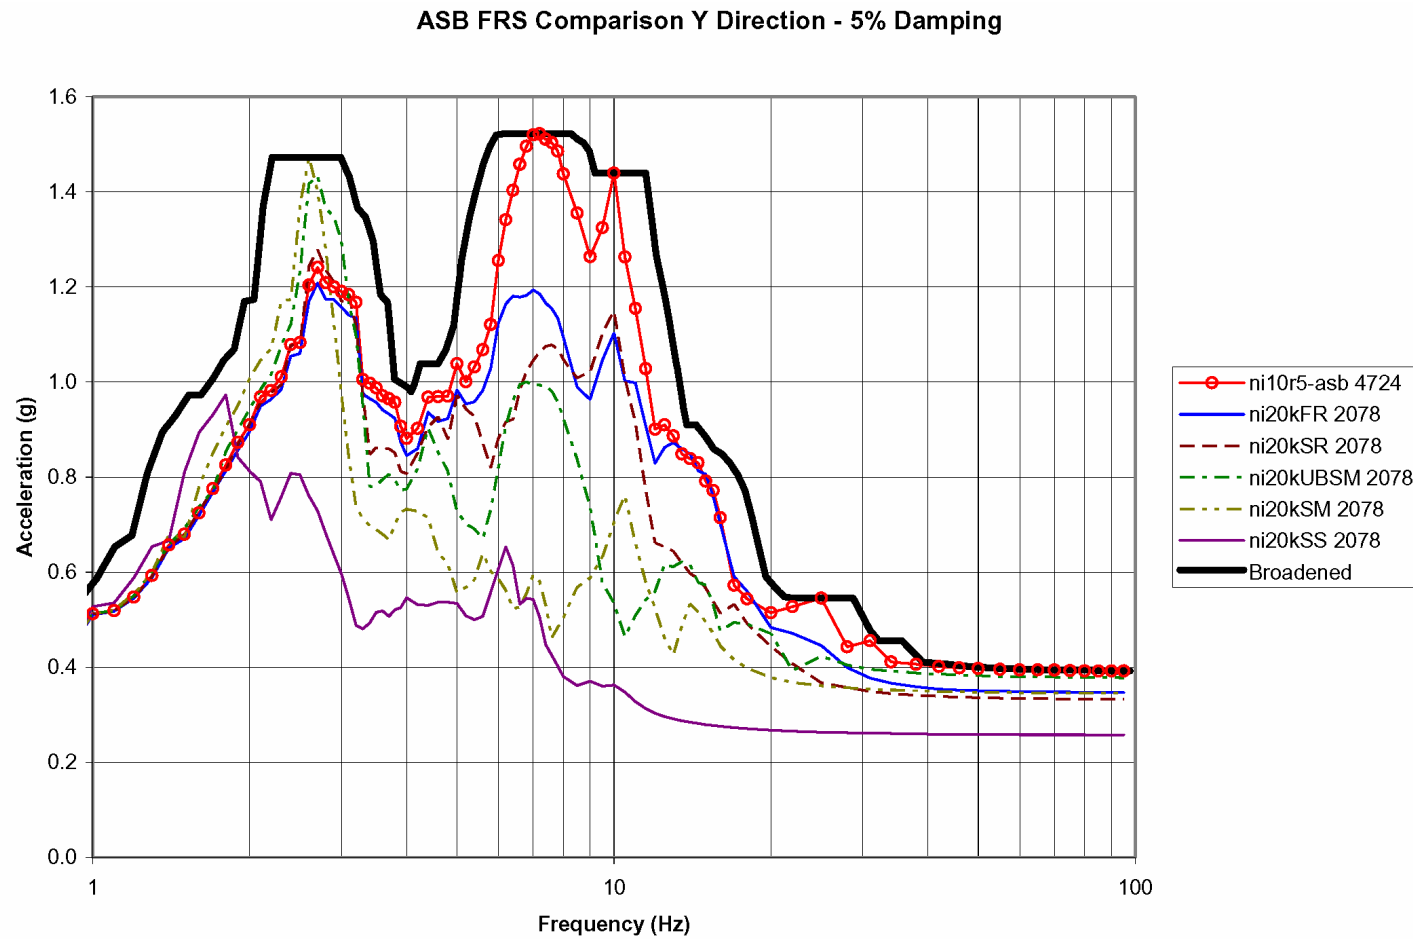


Figure 3G.4-7Y

Y Direction FRS for Node 4724 (NI10) or 2078 (NI20)
ASB Control Room Side Elevation 134.88'

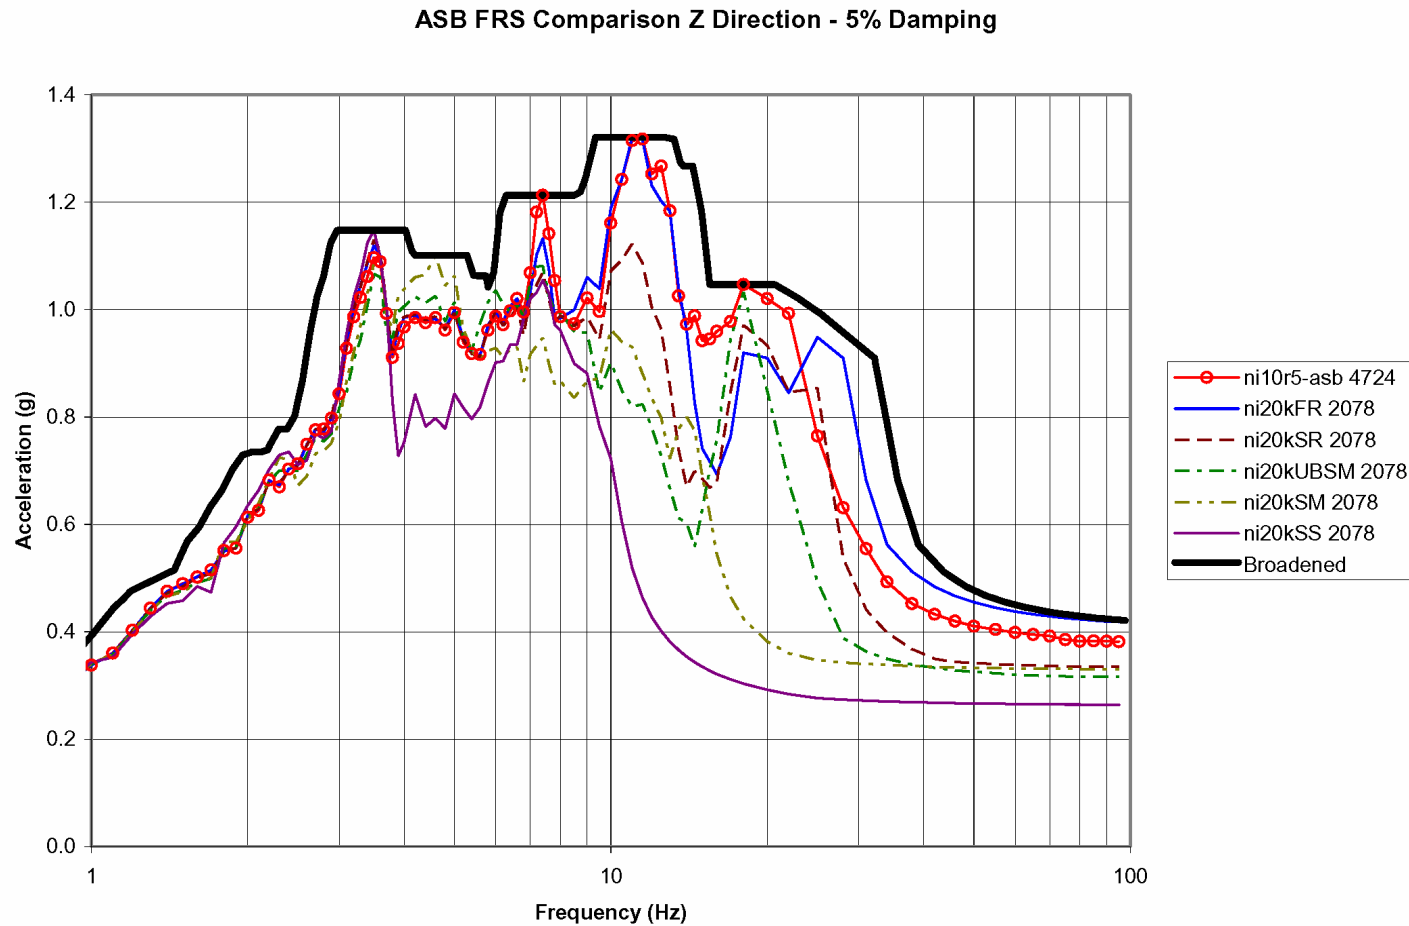


Figure 3G.4-7Z

Z Direction FRS for Node 4724 (NI10) or 2078 (NI20)
ASB Control Room Side Elevation 134.88'

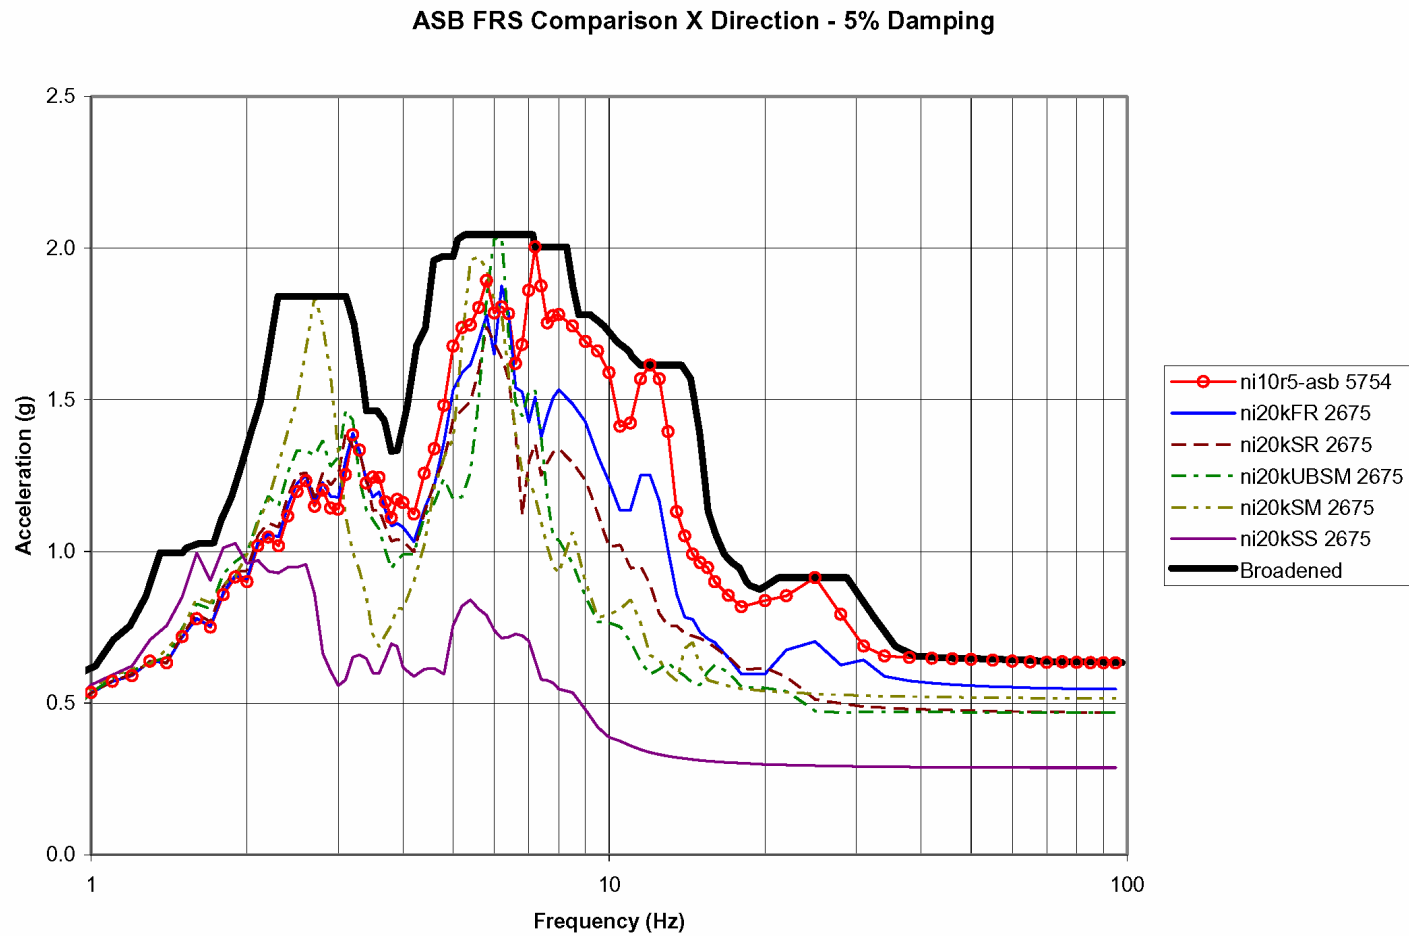


Figure 3G.4-8X

**X Direction FRS for Node 5754 (NI10) or 2675 (NI20)
ASB Fuel Building Roof Elevation 179.19'**

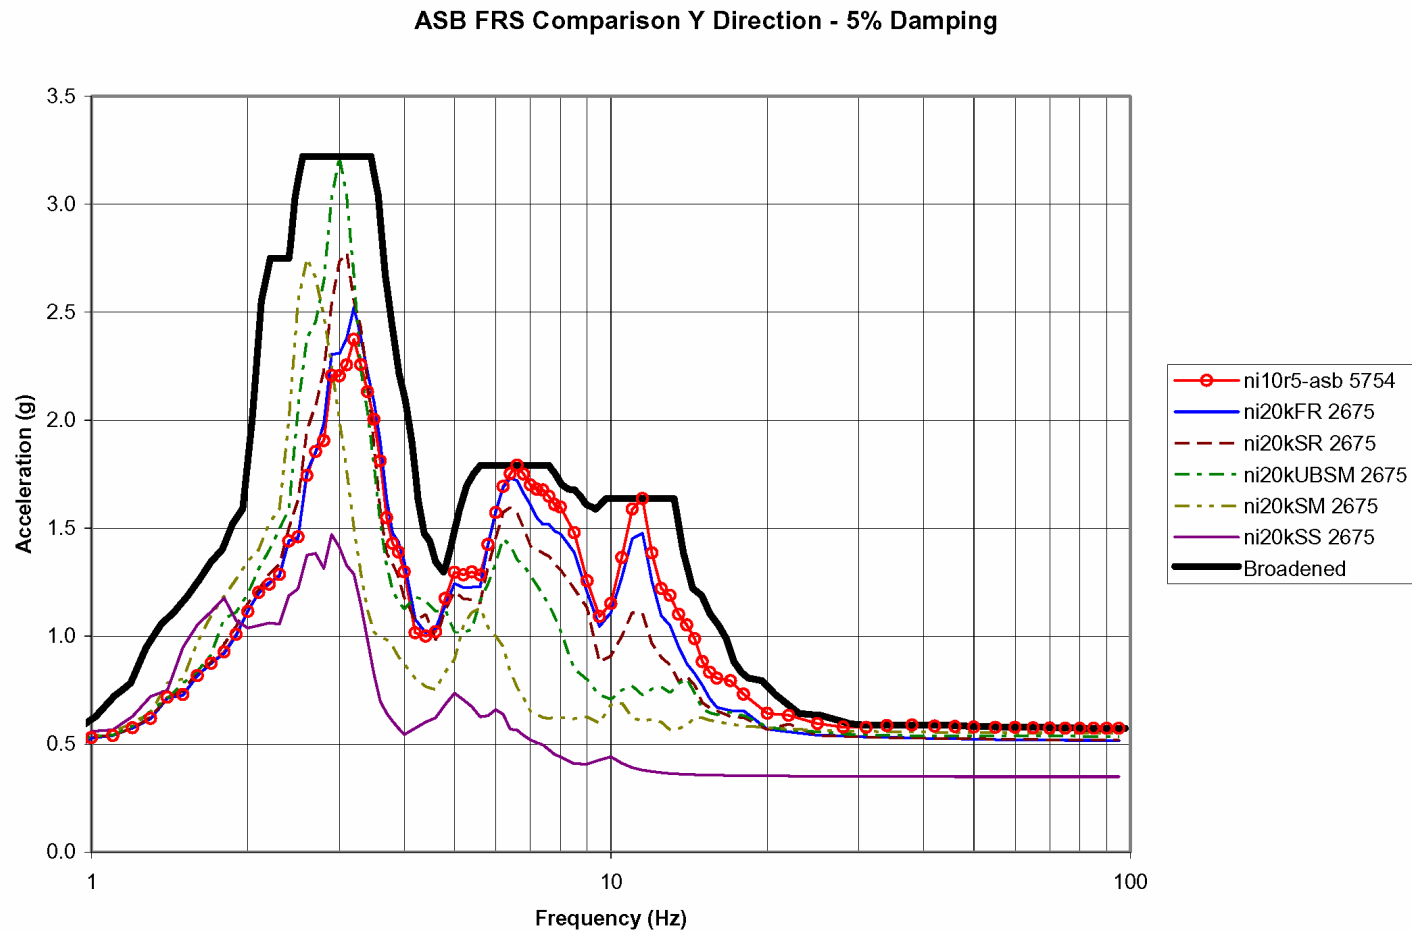


Figure 3G.4-8Y

Y Direction FRS for Node 5754 (NI10) or 2675 (NI20)
ASB Fuel Building Roof Elevation 179.19'

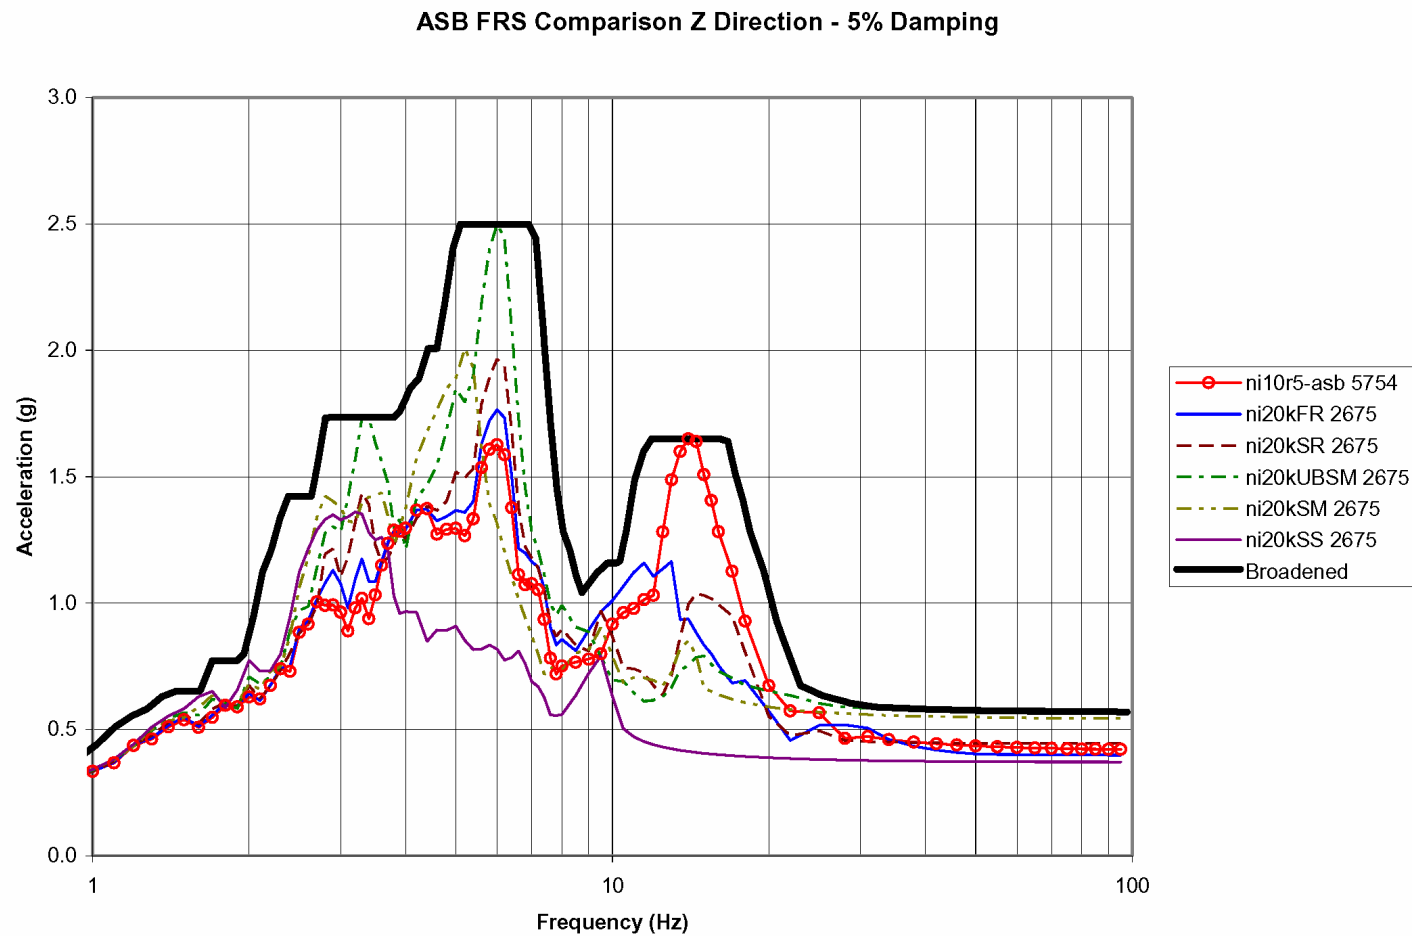


Figure 3G.4-8Z

**Z Direction FRS for Node 5754 (NI10) or 2675 (NI20)
ASB Fuel Building Roof Elevation 179.19'**

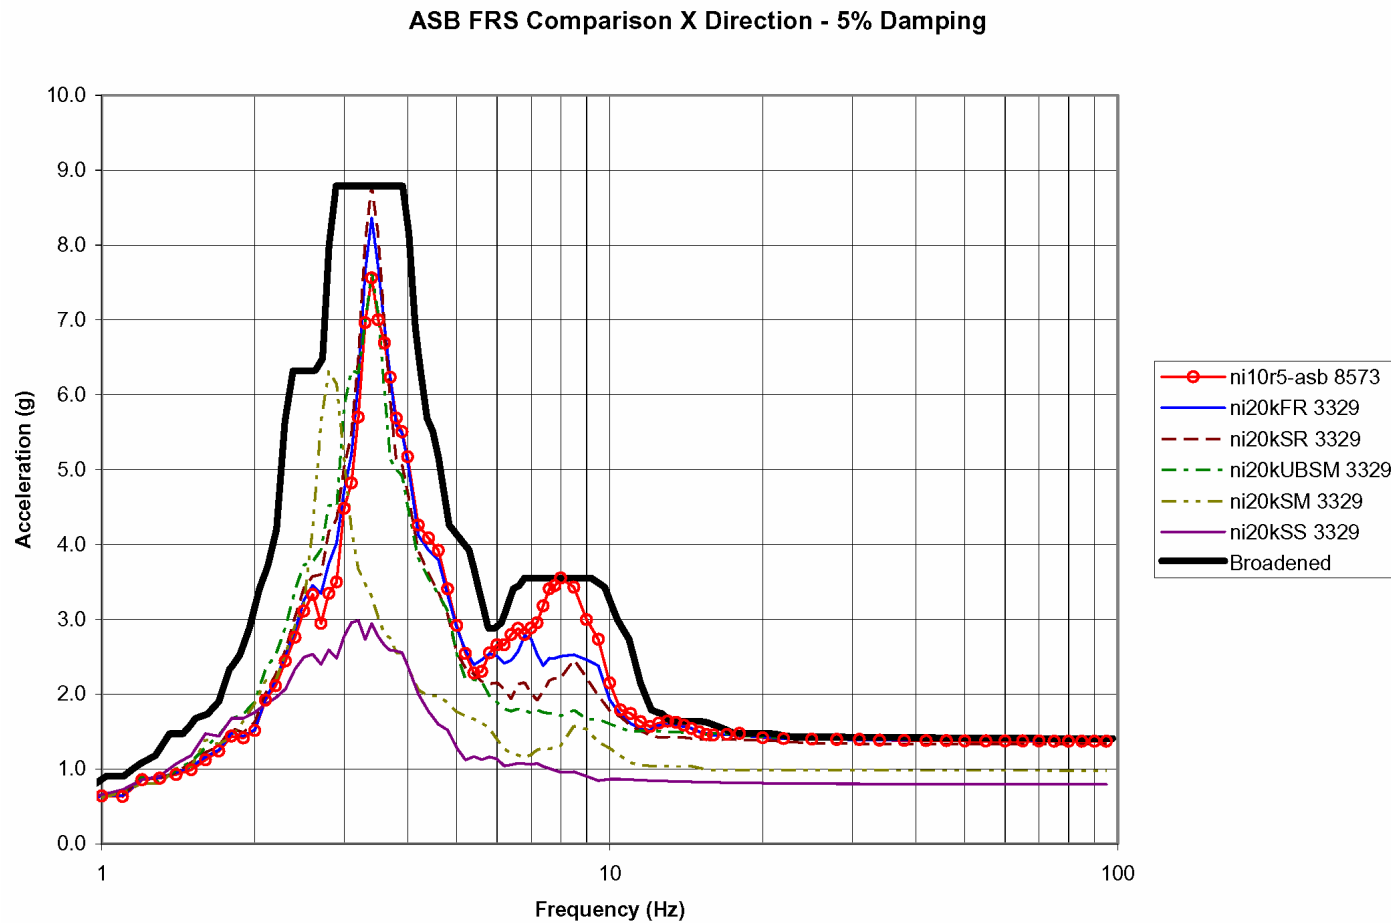


Figure 3G.4-9X

X Direction FRS for Node 2862 (NI10) or 3329 (NI20)
ASB Shield Building Roof Elevation 327.41'

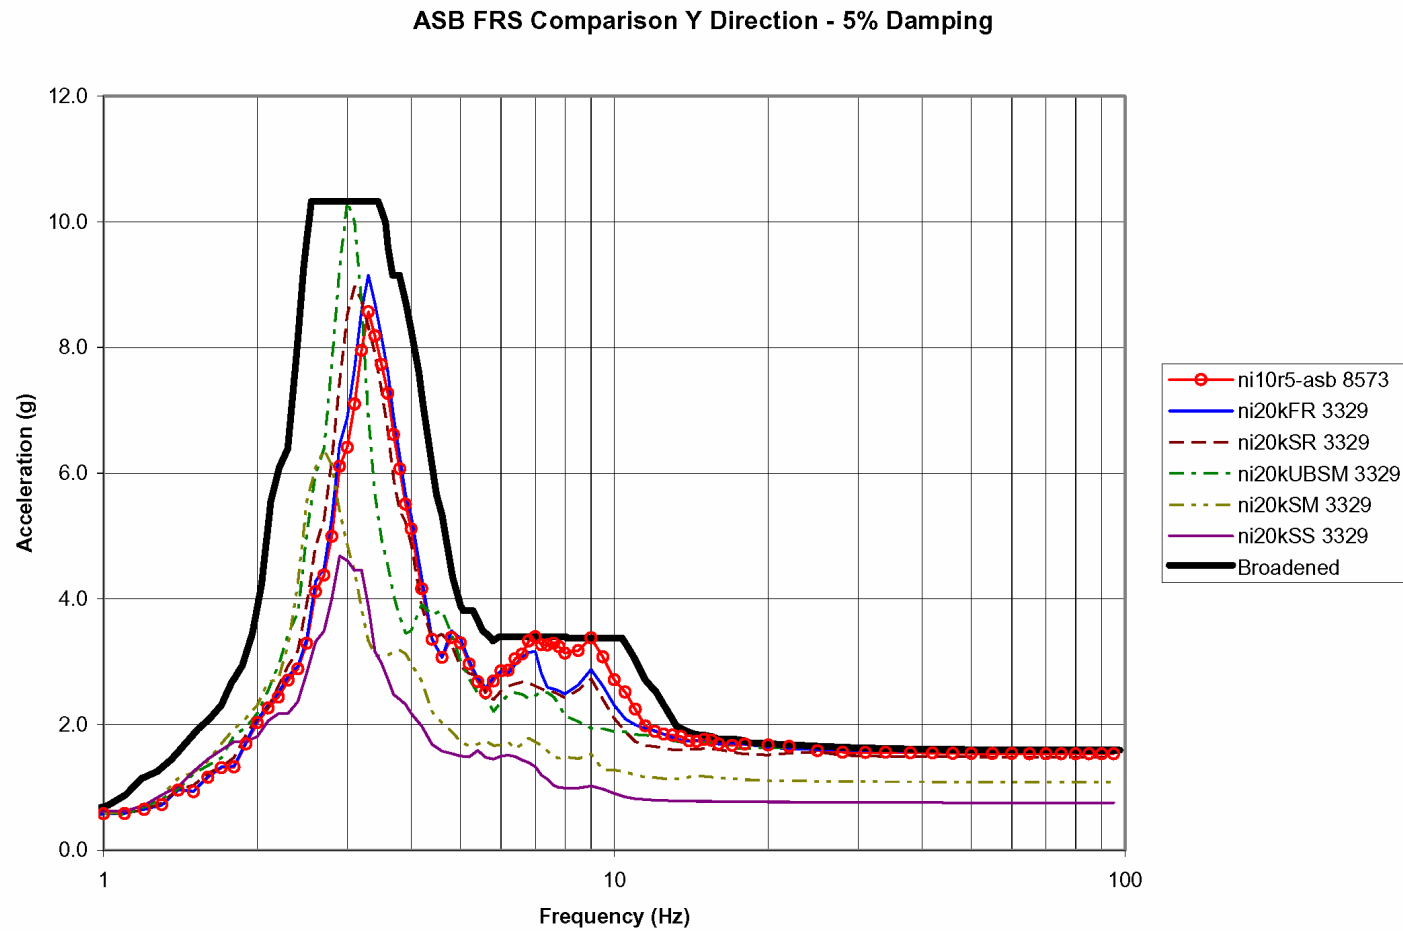


Figure 3G.4-9Y

**Y Direction FRS for Node 2862 (NI10) or 3329 (NI20)
ASB Shield Building Roof Elevation 327.41'**

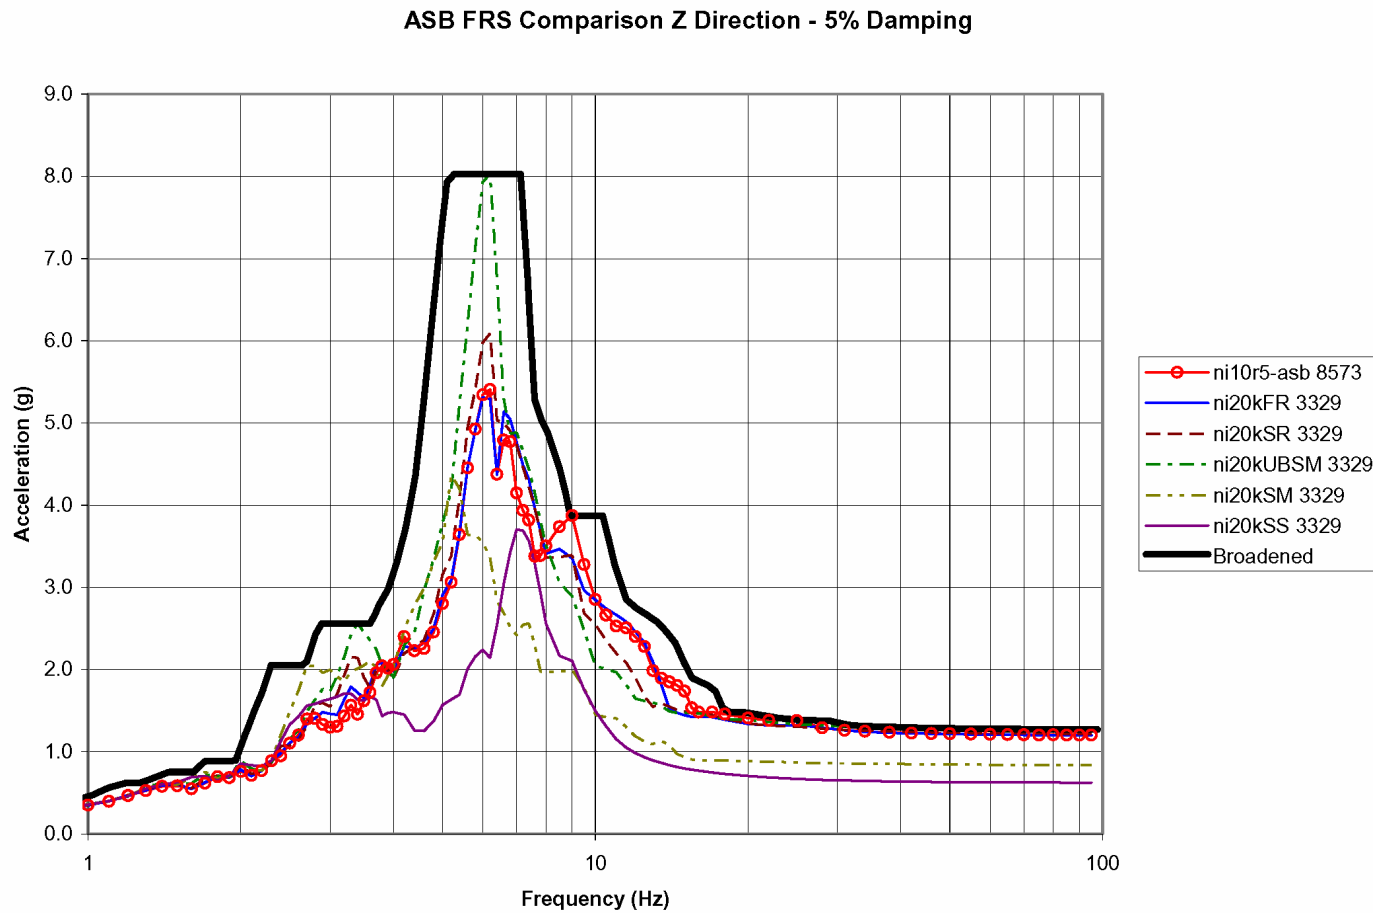


Figure 3G.4-9Z

**Z Direction FRS for Node 2862 (NI10) or 3329 (NI20)
ASB Shield Building Roof Elevation 327.41'**

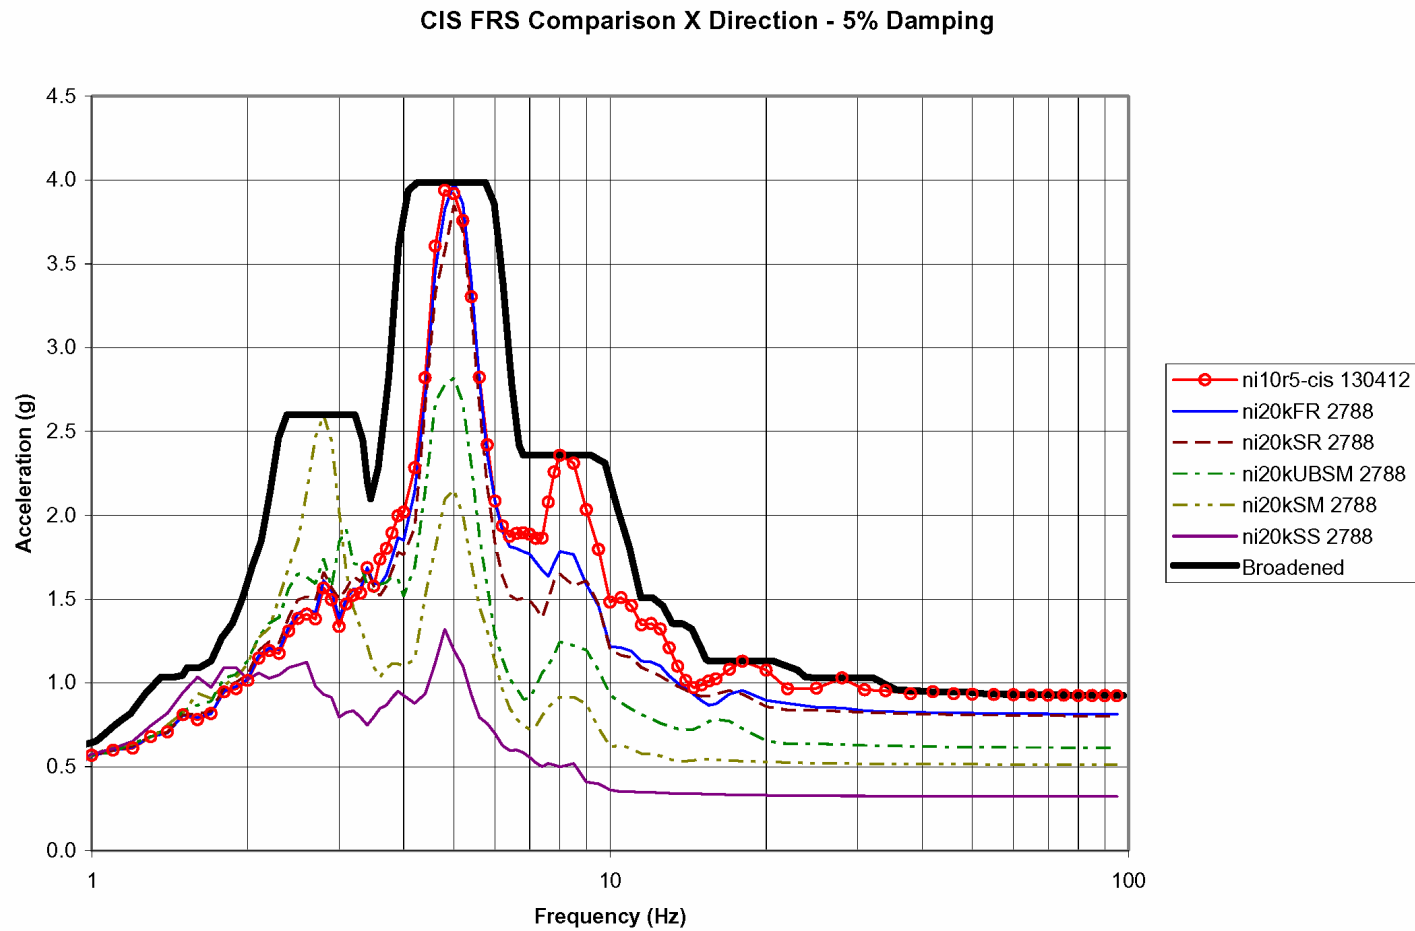


Figure 3G.4-10X

**X Direction FRS for Node 130412 (NI10) or 2788 (NI20)
SCV Near Polar Crane Elevation 224.00'**

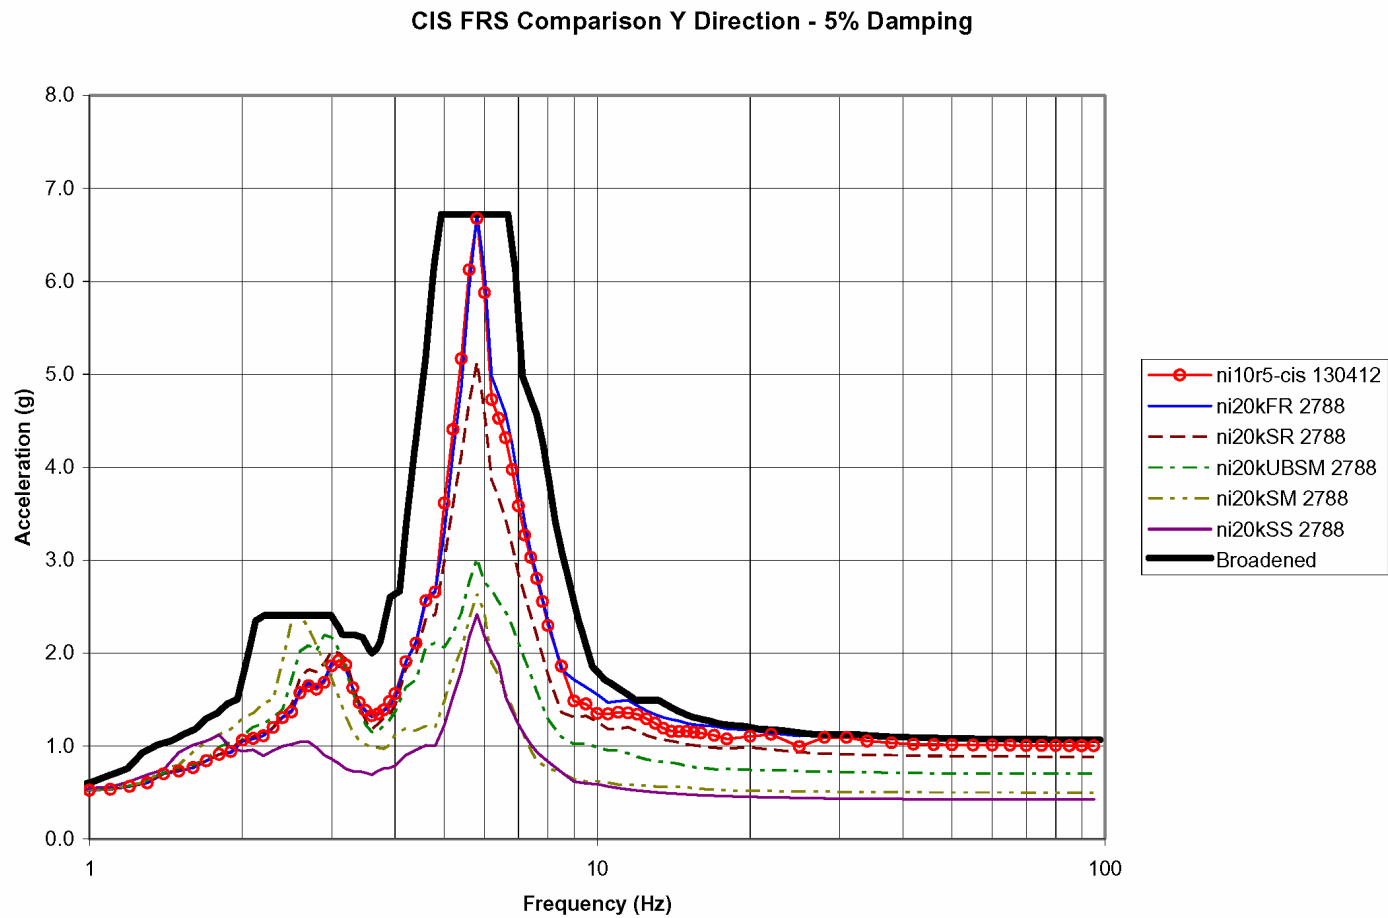


Figure 3G.4-10Y

**Y Direction FRS for Node 130412 (NI10) or 2788 (NI20)
SCV Near Polar Crane Elevation 224.00'**

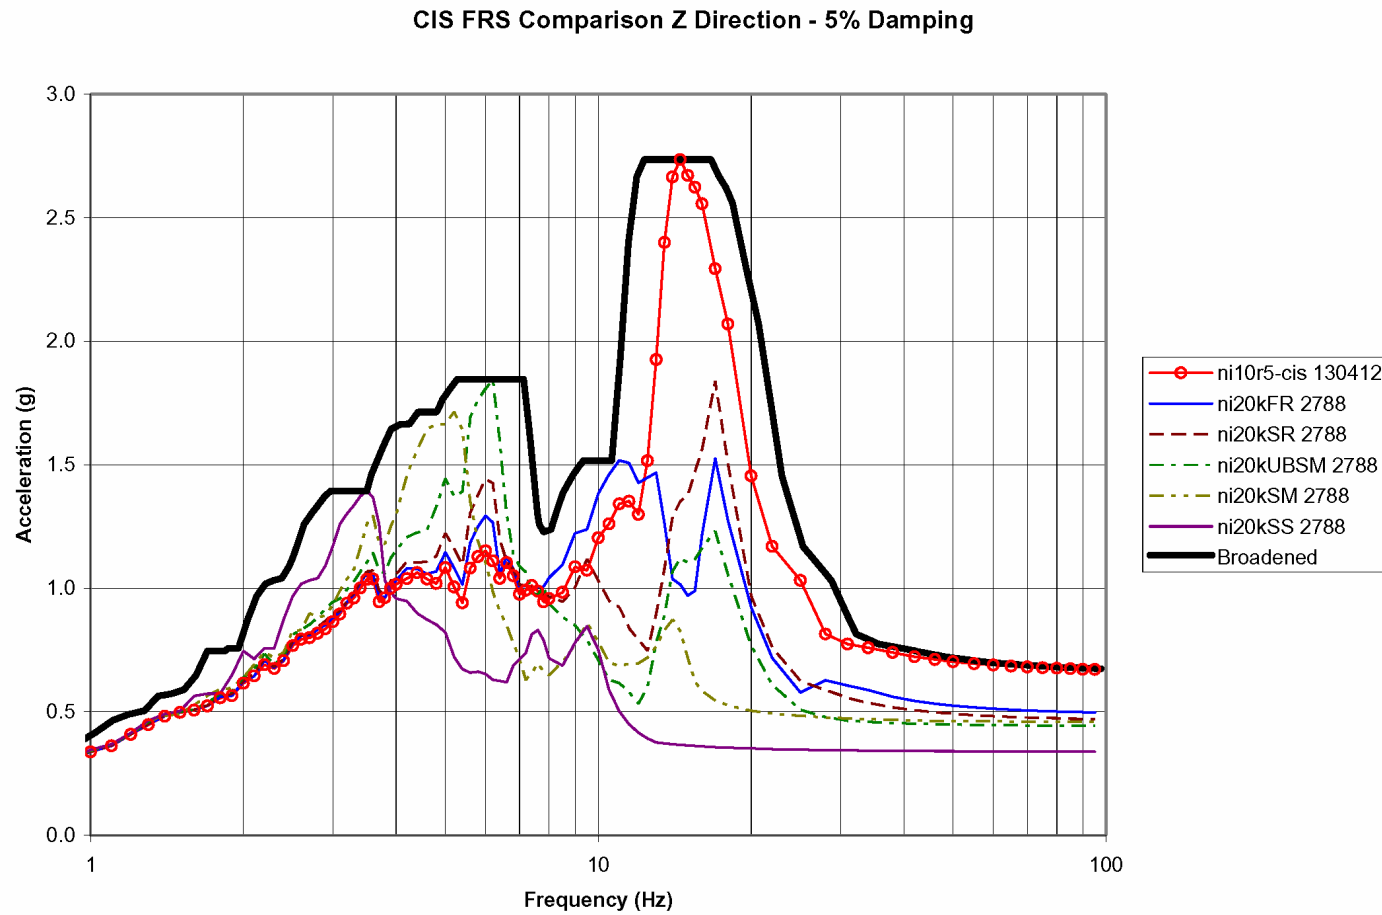


Figure 3G.4-10Z

**Z Direction FRS for Node 130412 (NI10) or 2788 (NI20)
SCV Near Polar Crane Elevation 224.00'**