





B-719 - Box 1




B-719 - Box 2

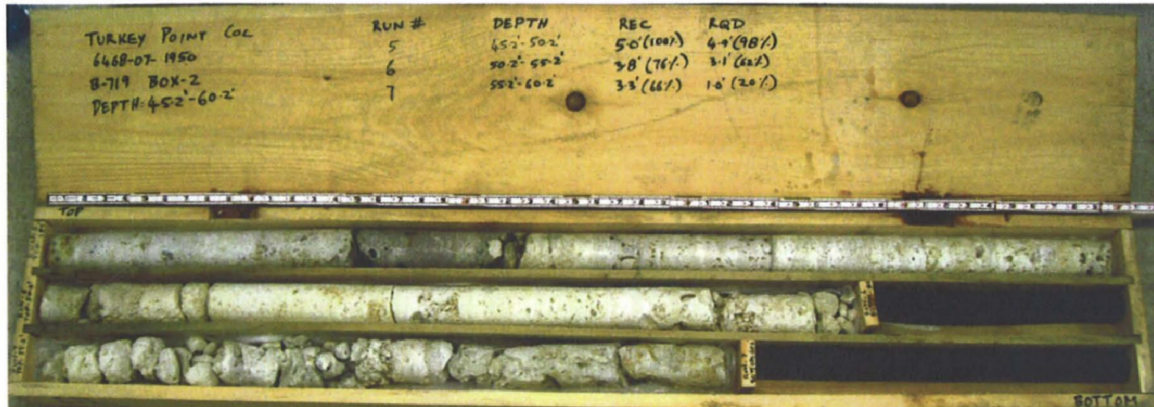

B-719 - Box 3

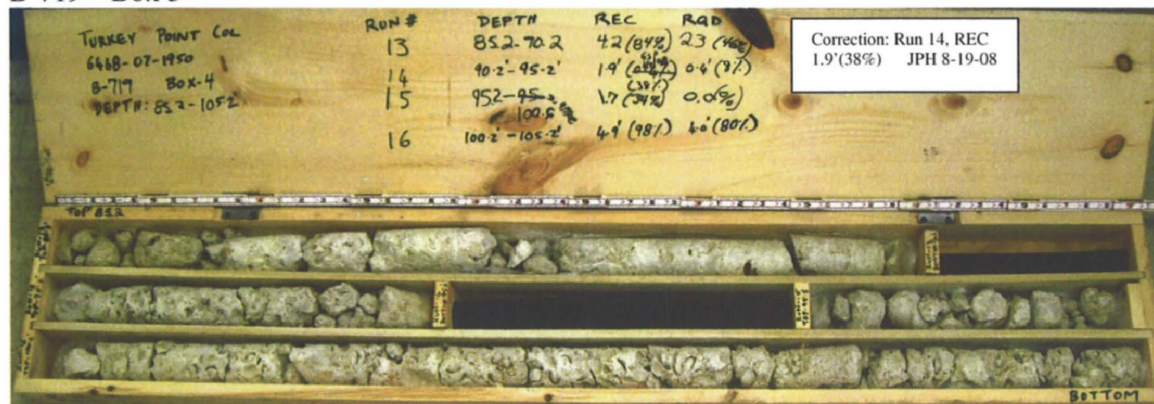

B-719 - Box 4

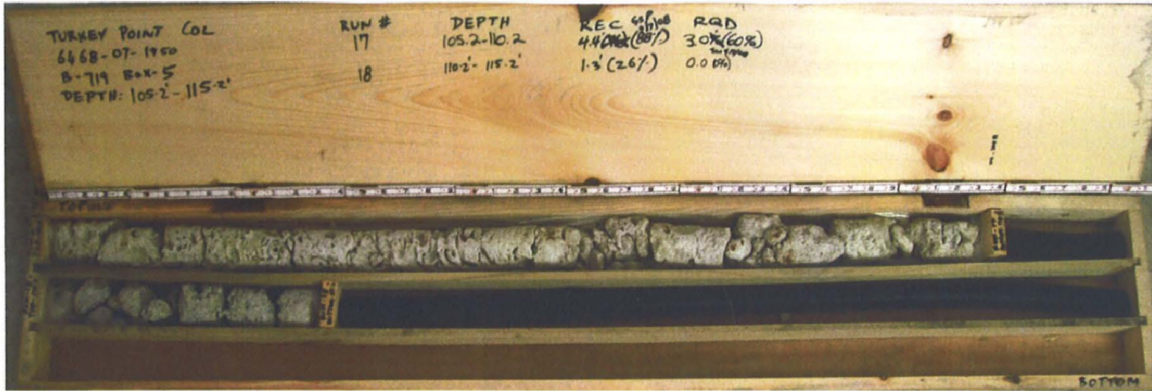

B-719 - Box 5



BECHTEL PROJECT NO.: 25409		MACTEC PROJECT NO.: 6468-07-1950		COUNTY: Miami-Dade		GEOLOGIST: B. Taylor							
SITE DESCRIPTION: Turkey Point COL		DRILL MACHINE: CME-550X (ATL)		DRILLER: R. Landeros/ N. Rodriguez		GROUND WATER (ft)							
BORING NO.: B-720(DH)		DRILL METHOD: Mud Rotary/ Core		SAMPLE METHODS: SPT/Core		0 HR.	NA						
GROUND ELEV.: -0.9 ft (NAVD88)		NORTHING: 397,397 US ft (NAD83/90)		EASTING: 875,791 US ft (NAD83/90)		24 HR.	NA						
TOTAL DEPTH: 204.9 ft		BORING DIAMETER: 4" to 204.9'		CASING DEPTH: 4" to 118.4'		HAMMER (ID): 140 lb. Auto (MEC-05)							
DATE STARTED: 4/5/08		COMPLETED: 4/8/08		CORE SIZE: HQ3		BITS USED: 3 7/8" Tricone							
ELEV. (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	
		0.5ft	0.5ft	0.5ft	0	20	40	60	80				100
-0.9					Ground Surface								
-0.9	0.0	WOH	WOH	WOH	0						720(DH)-1		MUCK, gray (10YR5/1), very soft, moist, organics, trace roots, strong HCl reaction
-4.4	3.5												
-6.9	6.0	12	16	14							720(DH)-2		LIMESTONE, boundstone, very pale brown (10YR8/2), soft, moist, strong HCl reaction, oolitic (Miami Formation)
-9.4	8.5	6	7	6							720(DH)-3		6.0ft: white (10YR8/1), very soft
-11.9	11.0	3	4	2							720(DH)-4		
-14.4	13.5	3	4	4							720(DH)-5		
-19.4	18.5	7	8	38							720(DH)-6		13.5ft: moderately hard, vugs
-19.4	18.5	5	5	7							720(DH)-7		18.5ft: very soft, trace interbedded sand
-24.4	23.5	9	9	22							720(DH)-8		23.5ft: medium hard
-26.9	26.9												
-29.4	28.5										720(DH)-9		LIMESTONE, boundstone, white (10YR8/1), hard, moist, strong HCl reaction, oolitic (Upper Fort Thompson Formation)
-30.7	29.8	24	48	50/0.3							RUN-1		29.8ft: Switch sampling method to coring
-34.3	33.4										RUN-2		29.8ft: moderately hard, moderately indurated, fossiliferous, vugs filled with cemented sand and shell fragments
-39.3	38.4										RUN-3		33.4ft: hard, indurated, few vugs, coralline
-44.3	43.4										RUN-4		38.4ft: loss of circulation
-49.3	48.4										RUN-5		43.4ft: white (10YR8/1) to 46.8ft, then gray (10YR6/1) to 48.4ft
-54.3	53.4										RUN-6		
-59.3	58.4										RUN-7		LIMESTONE, boundstone, white (10YR8/1), hard, indurated, fossiliferous, strong HCl reaction, few to little shell molds and casts (Lower Fort Thompson Formation)
-61.9	61.9												53.4ft: moderately hard, moderately indurated, little vugs, trace sand
-64.3	63.4										RUN-8		
-69.3	68.4										RUN-9		58.4ft: few vugs
-71.3	70.4										RUN-10		
-74.3	73.4										RUN-11		61.9ft: POORLY GRADED SAND (SP), light gray (10YR7/1), soft, moist, fine grained sand, and interbedded LIMESTONE, boundstone, white (10YR8/1), moderately hard, moderately indurated, trace vugs, few to little sand
													68.4ft: fine to medium grained sand, some shell fragments, few to little friable
													LIMESTONE fragments, strong HCl reaction
													LIMESTONE, boundstone, white (10YR8/1), moderately hard, moderately indurated, few

TURKEY POINT COL BORE TURKEY POINT.CPJ TURKEY POINT COL.GDT 8/19/08



BECHTEL PROJECT NO.: 25409		MACTEC PROJECT NO.: 6468-07-1950			COUNTY: Miami-Dade		GEOLOGIST: B. Taylor					
SITE DESCRIPTION: Turkey Point COL		DRILL MACHINE: CME-550X (ATL)			DRILLER: R. Landeros/ N. Rodriguez		GROUND WATER (ft)					
BORING NO.: B-720(DH)		DRILL METHOD: Mud Rotary/ Core			SAMPLE METHODS: SPT/Core		0 HR.	NA				
GROUND ELEV.: -0.9 ft (NAVD88)		NORTHING: 397,397 US ft (NAD83/90)			EASTING: 875,791 US ft (NAD83/90)		24 HR.	NA				
TOTAL DEPTH: 204.9 ft		BORING DIAMETER: 4" to 204.9'			CASING DEPTH: 4" to 118.4'		HAMMER (ID):140 lb. Auto (MEC-05)					
DATE STARTED: 4/5/08		COMPLETED: 4/8/08			CORE SIZE: HQ3		BITS USED: 3 7/8" Tricone					
ELEV. (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG MOI	SOIL AND ROCK DESCRIPTION
		0.5ft	0.5ft	0.5ft	0	20	40	60	80			
-75.7					Continued from previous page							
-79.3	78.4										RUN-12	vugs, strong HCl reaction, trace sand 73.4ft: fossiliferous LIMESTONE, boundstone, white (10YR8/1), moderately hard, moderately indurated, few vugs, strong HCl reaction, trace sand (continued)
-84.3	83.4										RUN-13	78.4ft: moderately hard to hard, moderately indurated to indurated, trace vugs, few shell molds and casts
-89.3	88.4										RUN-14	83.4ft: moderately hard, moderately indurated, few vugs
-94.3	93.4										RUN-15	92.4 POORLY GRADED SAND (SP), light gray (10YR7/1), moist, fine to medium grained sand, soft, some shell fragments, strong HCl reaction
-99.3	98.4										RUN-16	99.4 LIMESTONE, boundstone, white (10YR8/1), moderately hard, moderately indurated, little vugs, fossiliferous, strong HCl reaction, few to some shell molds and casts
-104.3	103.4										RUN-17	
-109.3	108.4										RUN-18	108.4ft: soft to moderately hard, friable to moderately indurated
-114.3	113.4										RUN-19	113.0 POORLY GRADED SAND with silt (SP-SM), light gray (10YR7/1), medium dense, wet, fine to coarse grained sand, some shell fragments, strong HCl reaction, with soft, friable to moderately indurated cemented sand layers (Tamiami Formation)
-119.3	118.4	6	8	5							720(DH)-10	118.4ft: Switch sampling method to SPT
-129.3	128.4	4	4	4							720(DH)-11	128.4ft: greenish gray (5GY5/1), loose, weak HCl reaction
-139.7	138.8	8	9	8							720(DH)-12	138.8 Silty SAND (SM), greenish gray (5GY5/1), medium dense, wet, weak HCl reaction, fine to coarse grained sand, fine gravel
-149.3	148.4	5	7	10							720(DH)-13	

TURKEY POINT COL BORE TURKEY POINT GPJ TURKEY POINT COL GDT 8/19/08



BECHTEL PROJECT NO.: 25409		MACTEC PROJECT NO.: 6468-07-1950		COUNTY: Miami-Dade		GEOLOGIST: B. Taylor	
SITE DESCRIPTION: Turkey Point COL		DRILL MACHINE: CME-550X (ATL)		DRILLER: R. Landeros/ N. Rodriguez		GROUND WATER (ft)	
BORING NO.: B-720(DH)		DRILL METHOD: Mud Rotary/ Core		SAMPLE METHODS: SPT/Core		0 HR.	NA
GROUND ELEV.: -0.9 ft (NAVD88)		NORTHING: 397,397 US ft (NAD83/90)		EASTING: 875,791 US ft (NAD83/90)		24 HR.	NA
TOTAL DEPTH: 204.9 ft		BORING DIAMETER: 4" to 204.9'		CASING DEPTH: 4" to 118.4'		HAMMER (ID):140 lb. Auto (MEC-05)	
DATE STARTED: 4/5/08		COMPLETED: 4/8/08		CORE SIZE: HQ3		BITS USED: 3 7/8" Tricone	

ELEV. (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION		
		0.5ft	0.5ft	0.5ft	0	20	40	60	80				100	
-150.5					Continued from previous page									
-159.3	158.4	4	6	13								148.4ft: fine grained sand Silty SAND (SM), greenish gray (5GY5/1), medium dense, wet, weak HCl reaction, fine to coarse grained sand, fine gravel (continued)		
-169.3	168.4	4	6	13						720(DH)-14		-159.3	158.4	Sandy SILT (ML), greenish gray (5GY5/1), very stiff, wet, weak HCl reaction, fine to coarse grained sand, fine gravel
-179.3	178.4	3	4	7						720(DH)-15				
-189.3	188.4	3	4	13						720(DH)-16				
-199.3	198.4	3	4	7						720(DH)-17				
-204.3	203.4	4	5	8						720(DH)-18				
										720(DH)-19				Boring Terminated at Elevation -205.8 ft

TURKEY POINT COL BORE, TURKEY POINT GP, TURKEY POINT COL GDF, 8/19/08



BECHTEL PROJECT NO.: 25409		MACTEC PROJECT NO.: 6468-07-1950		COUNTY: Miami-Dade		GEOLOGIST: B. Taylor	
SITE DESCRIPTION: Turkey Point COL		DRILL MACHINE: CME-550X (ATL)		DRILLER: R. Landeros/ N. Rodriguez		GROUND WATER (ft)	
BORING NO.: B-720(DH)		DRILL METHOD: Mud Rotary/ Core		SAMPLE METHODS: SPT/Core		0 HR. NA	
GROUND ELEV.: -0.9 ft (NAVD88)		NORTHING: 397,397 US ft (NAD83/90)		EASTING: 875,791 US ft (NAD83/90)		24 HR. NA	
TOTAL DEPTH: 204.9 ft		CASING DEPTH: 4" to 118.4'				HAMMER (ID): 140 lb. Auto (MEC-05)	
DATE STARTED: 4/5/08		COMPLETED: 4/8/08		CORE SIZE: HQ3		CORE BARREL TYPE: Triple Tube Wireline (Split inner liners)	

ELEV. (ft)	DEPTH (ft)	RUN (ft)	DRILL RATE (Min/ft)	RUN		SAMP. NO.	STRATA		LOG	DESCRIPTION AND REMARKS
				REC (ft) %	RQD (ft) %		REC (ft) %	RQD (ft) %		
										Begin Coring @ 29.8 ft
-30.7	29.8	3.6	0.39 0.41 0.42	(3.4) 94%	(3.0) 83%	RUN-1	(18.0) 97%	(16.7) 90%		LIMESTONE, boundstone, white (10YR8/1), hard, moist, strong HCl reaction, oolitic (Upper Fort Thompson Formation) (continued)
-34.3	33.4	5.0	0.28/0.6 1.14 0.50 0.38 0.29 0.30	(5.0) 100%	(4.4) 88%	RUN-2				29.8ft: moderately hard, moderately indurated, fossiliferous, vugs filled with cemented sand and shell fragments 33.4ft: hard, indurated, few vugs, coralline
-39.3	38.4	5.0	1.03 1.08 0.52 1.05 1.07	(4.6) 92%	(4.5) 90%	RUN-3				38.4ft: loss of circulation
-44.3	43.4	5.0	0.56 1.05 1.05 1.26 1.36	(5.0) 100%	(4.8) 96%	RUN-4				43.4ft: white (10YR8/1) to 46.8ft, then gray (10YR6/1) to 48.4ft
-49.3	48.4	5.0	1.08 1.16 1.02 1.14 0.55	(5.0) 100%	(5.0) 100%	RUN-5	(9.4) 75%	(7.7) 61%		LIMESTONE, boundstone, white (10YR8/1), hard, indurated, fossiliferous, strong HCl reaction, few to little shell molds and casts (Lower Fort Thompson Formation)
-54.3	53.4	5.0	0.40 1.06 0.48 0.19 0.28	(2.6) 52%	(0.4) 8%	RUN-6				53.4ft: moderately hard, moderately indurated, little vugs, trace sand
-59.3	58.4	5.0	0.41 0.26 0.49 0.38 0.21	(1.8) 36%	(1.8) 36%	RUN-7				58.4ft: few vugs
-64.3	63.4	5.0	0.25 1.27 0.41 1.04 3.29	(1.7) 34%	(0.0) 0%	RUN-8	(3.7) 39%	(0.0) 0%		POORLY GRADED SAND (SP), light gray (10YR7/1), soft, moist, fine grained sand, and interbedded LIMESTONE, boundstone, white (10YR8/1), moderately hard, moderately indurated, trace vugs, few to little sand
-69.3	68.4	1.8	0.26 3.35	(1.8) 100%	(0.0) 0%	RUN-9				68.4ft: fine to medium grained sand, some shell fragments, few to little friable LIMESTONE fragments, strong HCl reaction
-71.1	70.2	3.2	2.10 1.56 2.32	(3.2) 100%	(2.9) 91%	RUN-10 RUN-10	(15.2) 69%	(11.1) 50%		LIMESTONE, boundstone, white (10YR8/1), moderately hard, moderately indurated, few vugs, strong HCl reaction, trace sand
-74.3	73.4	5.0	0.23 0.25 0.37 0.29 0.23	(2.6) 52%	(1.7) 34%	RUN-11				73.4ft: fossiliferous
-79.3	78.4	5.0	0.36 0.19 0.15 0.29 0.41	(3.0) 60%	(1.7) 34%	RUN-12				78.4ft: moderately hard to hard, moderately indurated to indurated, trace vugs, few shell molds and casts
-84.3	83.4	5.0	0.30 0.19 0.27 0.54 0.39	(2.7) 54%	(2.1) 42%	RUN-13				83.4ft: moderately hard, moderately indurated, few vugs
-89.3	88.4	5.0	0.54 0.15 0.17 0.21 0.18	(3.9) 78%	(2.7) 54%	RUN-14				
-94.3	93.4	5.0	0.41 0.35 0.23 0.19 0.19	(2.7) 54%	(0.0) 0%	RUN-15	(2.7) 39%	(0.0) 0%		POORLY GRADED SAND (SP), light gray (10YR7/1), moist, fine to medium grained sand, soft, some shell fragments, strong HCl reaction
-99.3	98.4	5.0	0.48 1.05 0.53 1.08 0.47	(3.6) 72%	(2.1) 42%	RUN-16	(7.6) 56%	(5.6) 41%		LIMESTONE, boundstone, white (10YR8/1), moderately hard, moderately indurated, little vugs, fossiliferous, strong HCl reaction, few to some shell molds and casts
-104.3	103.4	5.0	0.34	(3.8)	(3.5)	RUN-17				


TURKEY POINT COL CORE TURKEY POINT.GPJ TURKEY POINT COL.GDT 8/19/08



BECHTEL PROJECT NO.: 25409		MACTEC PROJECT NO.: 6468-07-1950		COUNTY: Miami-Dade	GEOLOGIST: B. Taylor
SITE DESCRIPTION: Turkey Point COL		DRILL MACHINE: CME-550X (ATL)		DRILLER: R. Landeros/ N. Rodriguez	
BORING NO.: B-720(DH)		DRILL METHOD: Mud Rotary/ Core		SAMPLE METHODS: SPT/Core	
GROUND ELEV.: -0.9 ft (NAVD88)		NORTHING: 397,397 US ft (NAD83/90)		EASTING: 875,791 US ft (NAD83/90)	
TOTAL DEPTH: 204.9 ft		CASING DEPTH: 4" to 118.4'			HAMMER (ID): 140 lb. Auto (MEC-05)
DATE STARTED: 4/5/08		COMPLETED: 4/8/08	CORE SIZE: HQ3	CORE BARREL TYPE: Triple Tube Wireline (Split inner liners)	

ELEV. (ft)	DEPTH (ft)	RUN (ft)	DRILL RATE (Min/ft)	RUN		SAMP. NO.	STRATA		LOG	DESCRIPTION AND REMARKS
				REC. (ft) %	RQD (ft) %		REC. (ft) %	RQD (ft) %		
										Continued from previous page
-109.3	108.4		0.39 0.32 0.28 0.19	76%	70%					LIMESTONE, boundstone, white (10YR8/1), moderately hard, moderately indurated, little vugs, fossiliferous, strong HCl reaction, few to some shell molds and casts (continued)
		5.0	0.26 0.22 0.19 1.37 0.39	(0.2) 4%	(0.0) 0%	RUN-18				108.4ft: soft to moderately hard, friable to moderately indurated
-114.3	113.4		0.25 0.21 0.10 0.11 0.11	(0.7) 14%	(0.0) 0%	RUN-19	(0.7) 13%	(NA)		POORLY GRADED SAND with silt (SP-SM), light gray (10YR7/1), medium dense, wet, fine to coarse grained sand, some shell fragments, strong HCl reaction, with soft, friable to moderately indurated cemented sand layers (Tamiami Formation)
-119.3	118.4									Coring Terminated at Elevation -119.3


TURKEY POINT COL CORE TURKEY POINT.GPJ TURKEY POINT COL.GDT 8/19/08

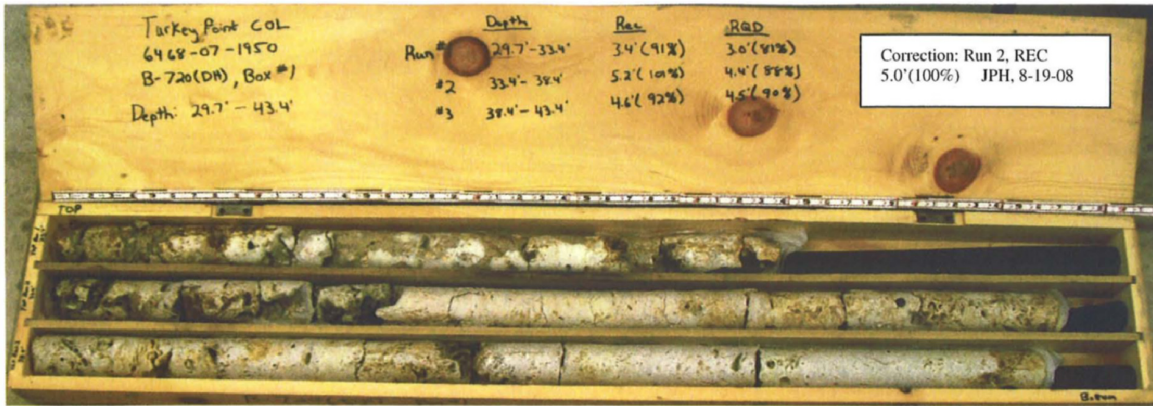

B-720 (DH) - Box 1




B-720 (DH) - Box 2

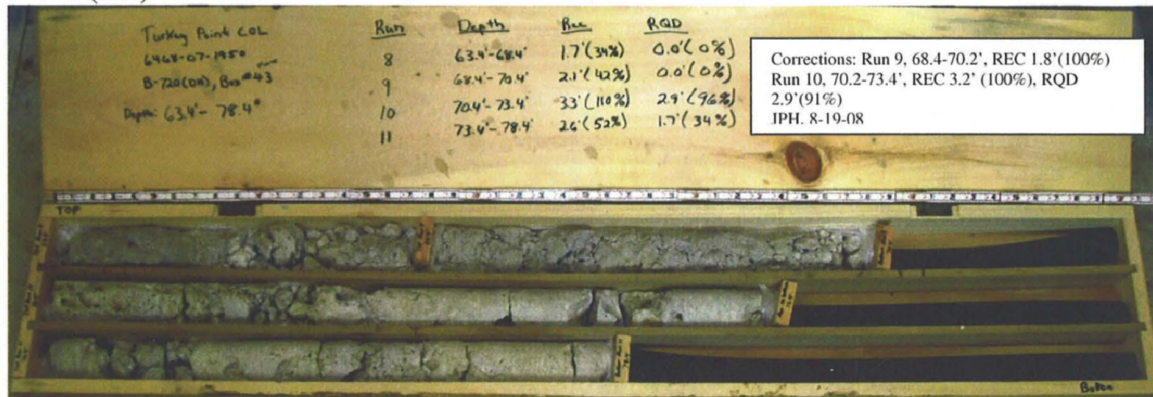


B-720 (DH) - Box 3



B-720 (DH) - Box 4

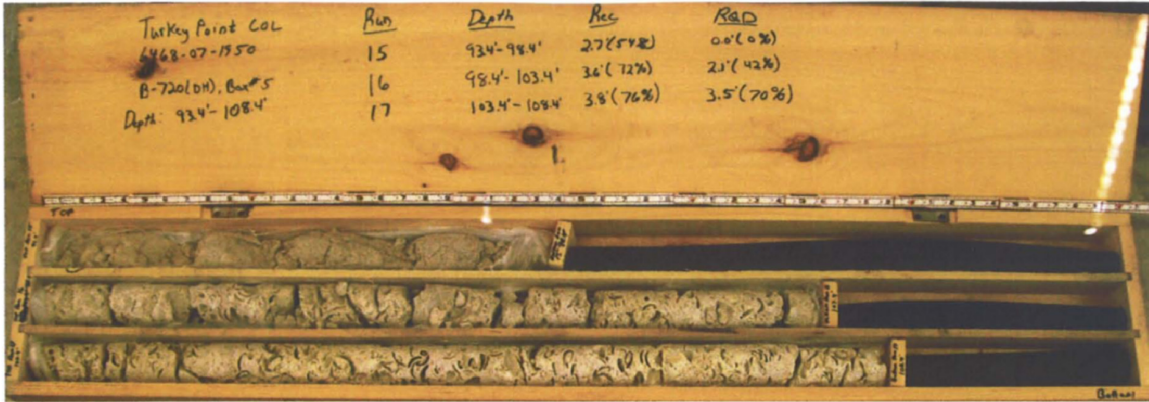

B-720 (DH) - Box 5

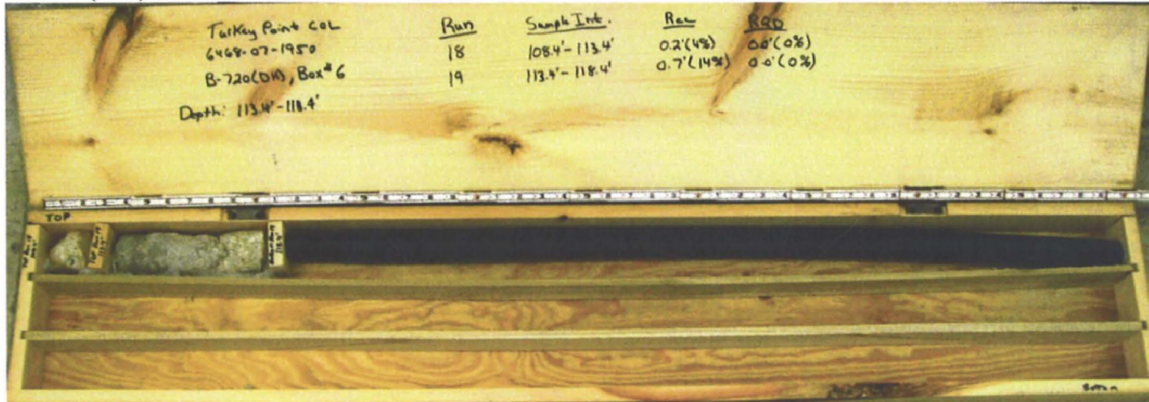

B-720 (DH) - Box 6



GEOTECHNICAL BORING LOG

Prepared By [Signature] Date 5-30-08

Checked By [Signature] Date 5-30-08

SHEET 1 OF 3

BECHTEL PROJECT NO.: 25409		MACTEC PROJECT NO.: 6468-07-1950		COUNTY: Miami-Dade		GEOLOGIST: S. Woodham							
SITE DESCRIPTION: Turkey Point COL		DRILL MACHINE: CME-55 Marsh Buggy		DRILLER: P. Pitts/R. Price		GROUND WATER (ft)							
BORING NO.: B-720G(DH)		DRILL METHOD: Mud Rotary		SAMPLE METHODS: NA		0 HR. NA							
GROUND ELEV.: -1.1 ft (NAVD88)		NORTHING: 397,385 US ft (NAD83/90)		EASTING: 875,794 US ft (NAD83/90)		24 HR. NA							
TOTAL DEPTH: 220.8 ft		BORING DIAMETER: 4" to 220.8'		CASING DEPTH: NA		HAMMER (ID): 140 lb. Auto (MEC-425)							
DATE STARTED: 3/12/08		COMPLETED: 3/20/08		CORE SIZE: NA		BITS USED: 3 7/8" Mill Bit							
ELEV. (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG MOI	SOIL AND ROCK DESCRIPTION	
		0.5ft	0.5ft	0.5ft	0	20	40	60	80				100
-1.1													Ground Surface
													SEE LEGEND FOR ROCK HARDNESS CRITERIA BASED ON SPT DATA
													Muck
													LIMESTONE (Miami Formation)
													LIMESTONE (Fort Thompson Formation)

TURKEY POINT COL BORE TURKEY POINT GP TURKEY POINT COL.GDI: 5:30:08

