


Oyster Creek

4Q/2010 Performance Indicators

Licensee's General Comments: none

Unplanned Scrams per 7000 Critical Hrs

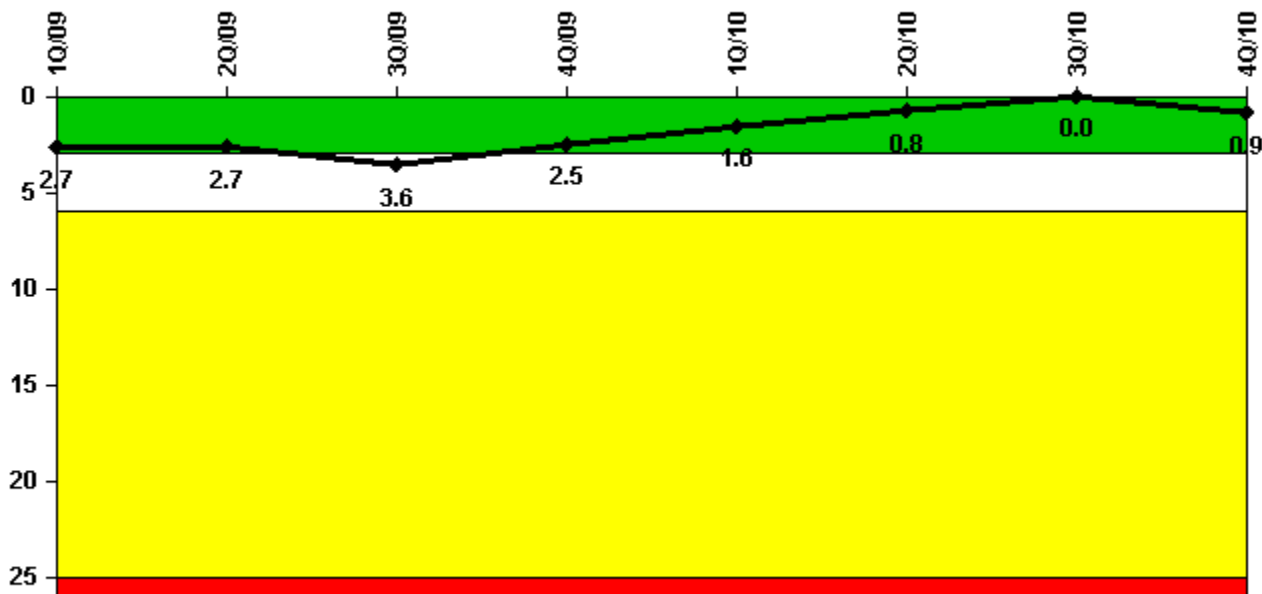


Thresholds: White > 3.0 Yellow > 6.0 Red > 25.0

Notes

Unplanned Scrams per 7000 Critical Hrs	1Q/09	2Q/09	3Q/09	4Q/09	1Q/10	2Q/10	3Q/10	4Q/10
Unplanned scrams	1.0	1.0	1.0	0	0	0	0	1.0
Critical hours	2110.7	2011.3	2113.4	2209.0	2159.0	2099.7	2208.0	1404.6
Indicator value	2.7	2.7	3.6	2.5	1.6	0.8	0	0.9

Licensee Comments: none

Unplanned Power Changes per 7000 Critical Hrs

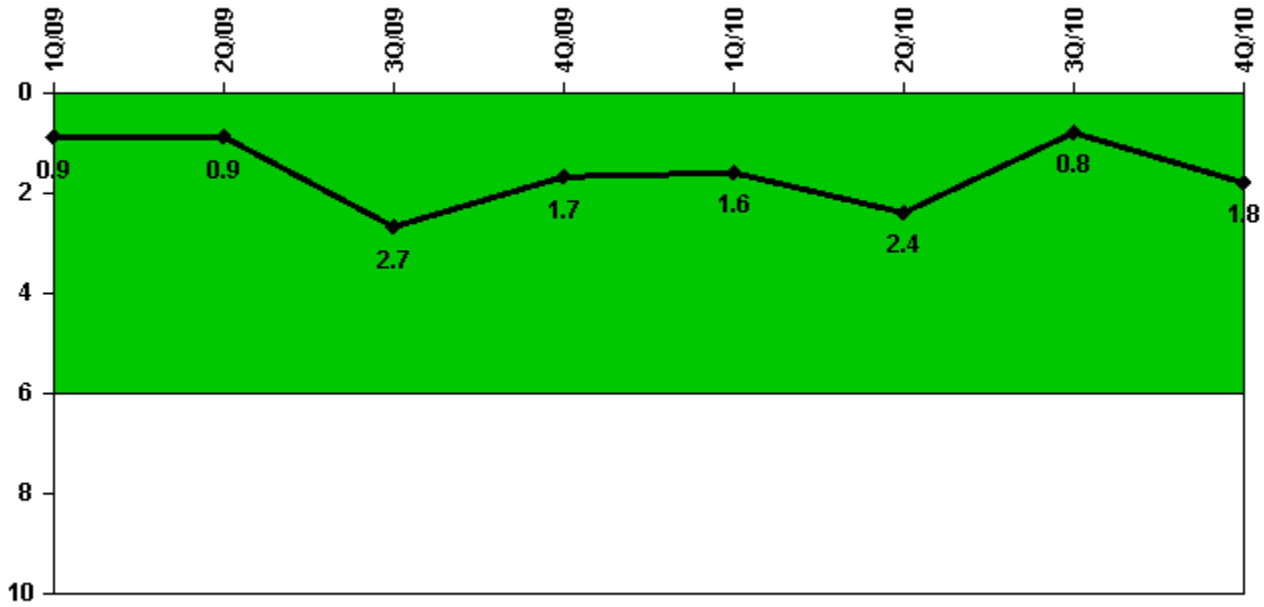


Thresholds: White > 6.0

Notes

Unplanned Power Changes per 7000 Critical Hrs	1Q/09	2Q/09	3Q/09	4Q/09	1Q/10	2Q/10	3Q/10	4Q/10
Unplanned power changes	0	0	2.0	0	0	1.0	0	1.0
Critical hours	2110.7	2011.3	2113.4	2209.0	2159.0	2099.7	2208.0	1404.6
Indicator value	0.9	0.9	2.7	1.7	1.6	2.4	0.8	1.8

Licensee Comments: none

Unplanned Scrams with Complications

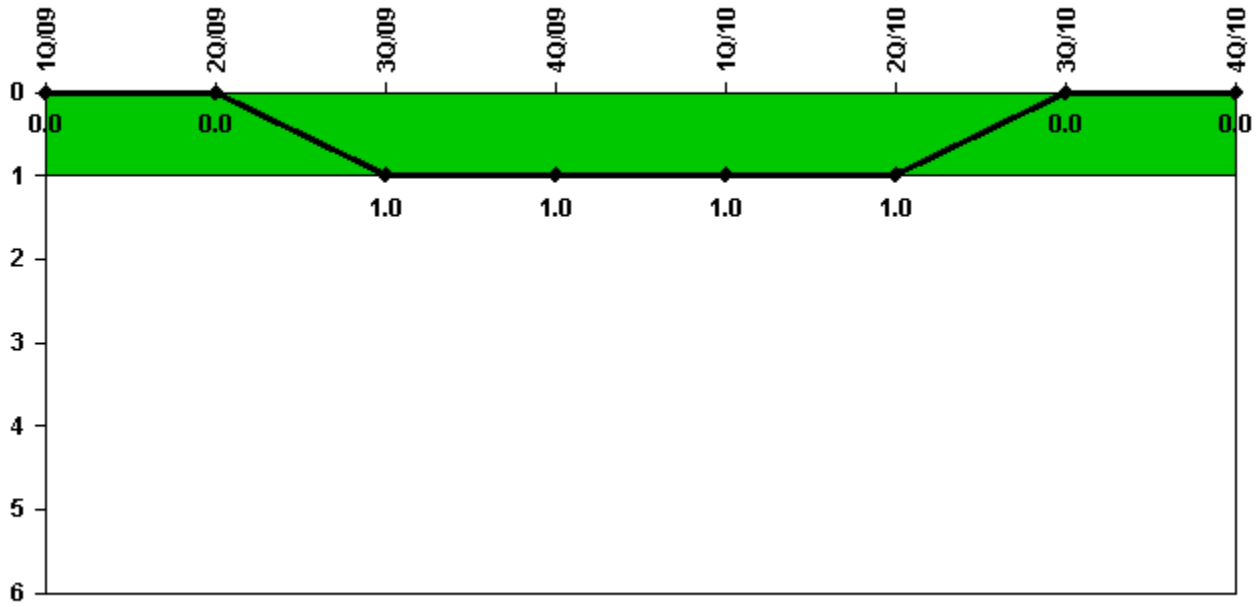


Thresholds: White > 1.0

Notes

Unplanned Scrams with Complications	1Q/09	2Q/09	3Q/09	4Q/09	1Q/10	2Q/10	3Q/10	4Q/10
Scrams with complications	0	0	1.0	0	0	0	0	0
Indicator value	0.0	0.0	1.0	1.0	1.0	1.0	0.0	0.0

Licensee Comments: none

Safety System Functional Failures (BWR)

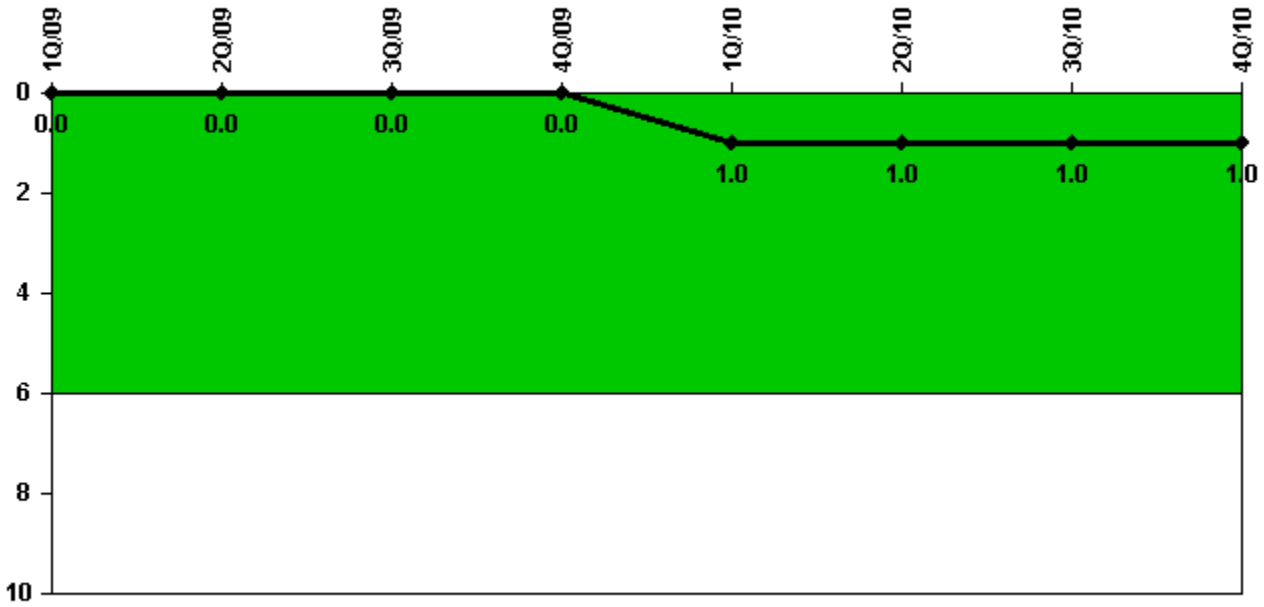


Thresholds: White > 6.0

Notes

Safety System Functional Failures (BWR)	1Q/09	2Q/09	3Q/09	4Q/09	1Q/10	2Q/10	3Q/10	4Q/10
Safety System Functional Failures	0	0	0	0	1	0	0	0
Indicator value	0	0	0	0	1	1	1	1

Licensee Comments: none

Mitigating Systems Performance Index, Emergency AC Power System

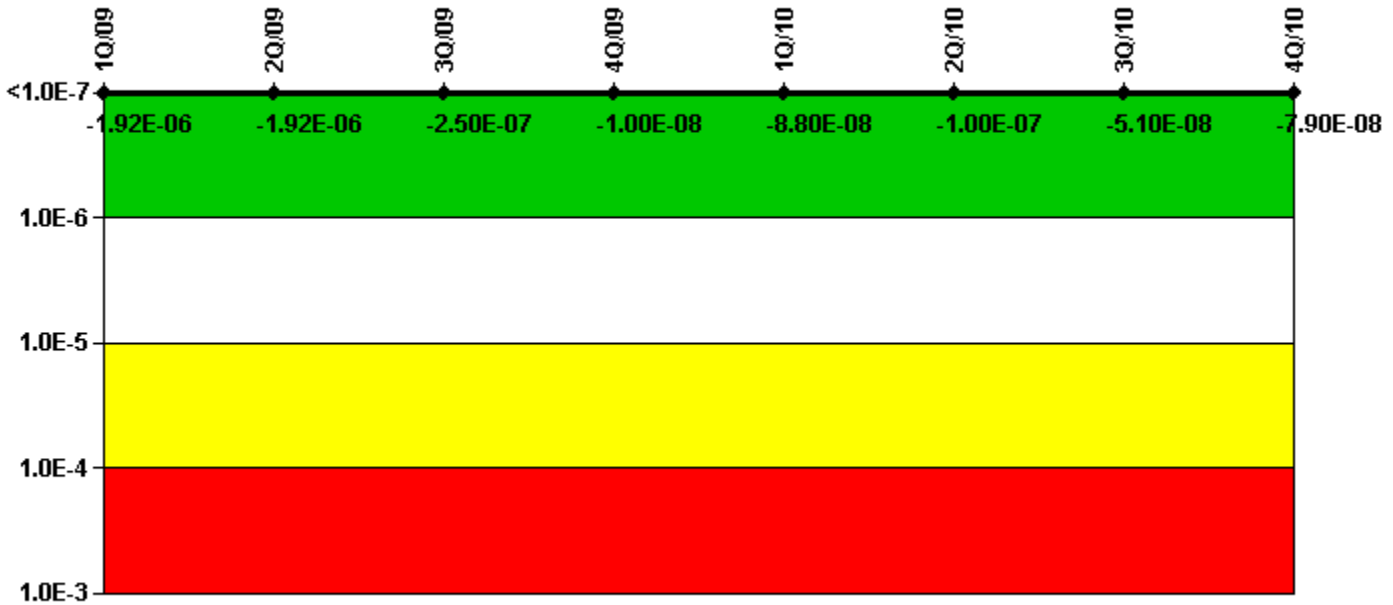

Thresholds: White > 1.00E-6 Yellow > 1.00E-5 Red > 1.00E-4

Notes

Mitigating Systems Performance Index, Emergency AC Power System	1Q/09	2Q/09	3Q/09	4Q/09	1Q/10	2Q/10	3Q/10	4Q/10
UAI (Δ CDF)	-2.20E-07	-2.20E-07	1.80E-07	4.40E-07	7.23E-08	6.67E-08	6.87E-08	2.82E-08
URI (Δ CDF)	-1.70E-06	-1.70E-06	-4.30E-07	-4.50E-07	-1.60E-07	-1.67E-07	-1.19E-07	-1.07E-07
PLE	NO	NO	NO	NO	NO	NO	NO	NO
Indicator value	-1.92E-06	-1.92E-06	-2.50E-07	-1.00E-08	-8.80E-08	-1.00E-07	-5.10E-08	-7.90E-08

Licensee Comments:

4Q/10: Engineering evaluation 1155861-11 in progress to review EDG battery charger card failure for MSPI applicability.

Mitigating Systems Performance Index, High Pressure Injection System




Thresholds: White > 1.00E-6 Yellow > 1.00E-5 Red > 1.00E-4

Notes

Mitigating Systems Performance Index, High Pressure Injection System	1Q/09	2Q/09	3Q/09	4Q/09	1Q/10	2Q/10	3Q/10	4Q/10
UAI (Δ CDF)	-1.90E-08	-1.80E-08	-1.20E-08	-1.10E-08	1.54E-09	4.95E-10	1.90E-09	1.81E-09
URI (Δ CDF)	-3.40E-09	-3.30E-09	-3.30E-09	-3.40E-09	-1.39E-09	-1.39E-09	-1.39E-09	-1.36E-09
PLE	NO	NO	NO	NO	NO	NO	NO	NO
Indicator value	-2.24E-08	-2.13E-08	-1.53E-08	-1.44E-08	1.50E-10	-9.00E-10	5.10E-10	4.50E-10

Licensee Comments: none

Mitigating Systems Performance Index, Heat Removal System

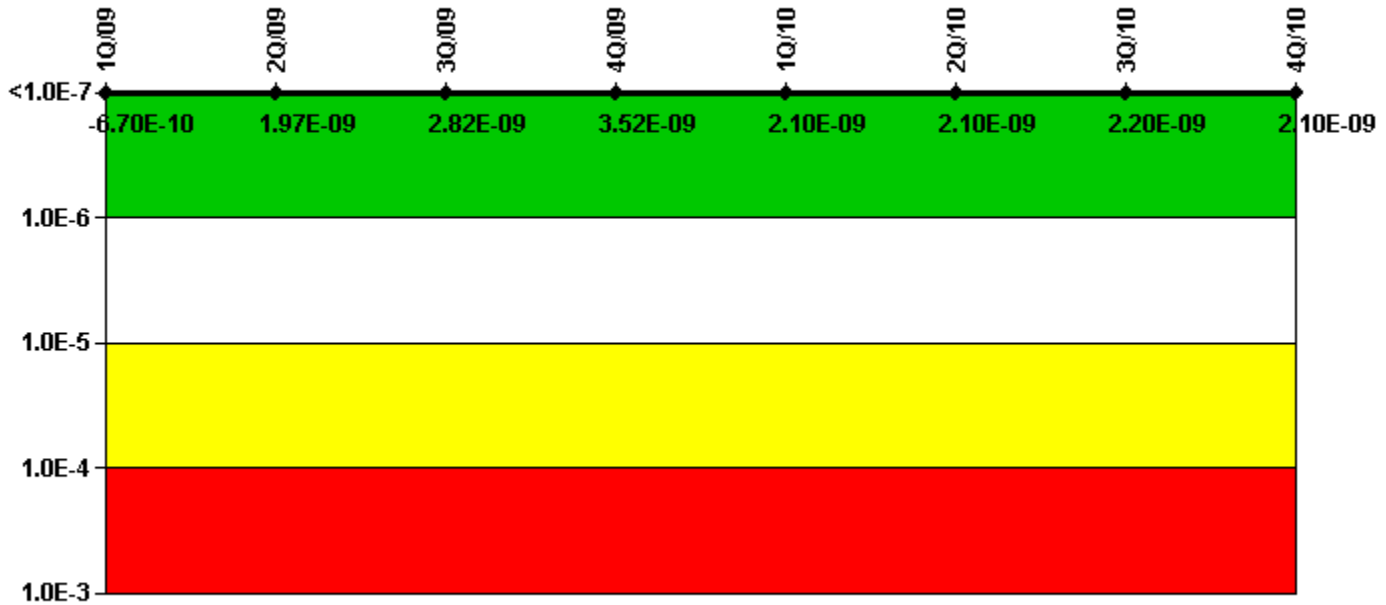


Thresholds: White > 1.00E-6 Yellow > 1.00E-5 Red > 1.00E-4

Notes

Mitigating Systems Performance Index, Heat Removal System	1Q/09	2Q/09	3Q/09	4Q/09	1Q/10	2Q/10	3Q/10	4Q/10
UAI (Δ CDF)	-5.60E-10	2.10E-09	3.10E-09	3.80E-09	2.19E-09	2.18E-09	2.28E-09	2.23E-09
URI (Δ CDF)	-1.10E-10	-1.30E-10	-2.80E-10	-2.80E-10	-1.11E-10	-1.12E-10	-9.97E-11	-1.01E-10
PLE	NO	NO	NO	NO	NO	NO	NO	NO
Indicator value	-6.70E-10	1.97E-09	2.82E-09	3.52E-09	2.10E-09	2.10E-09	2.20E-09	2.10E-09

Licensee Comments: none

Mitigating Systems Performance Index, Residual Heat Removal System

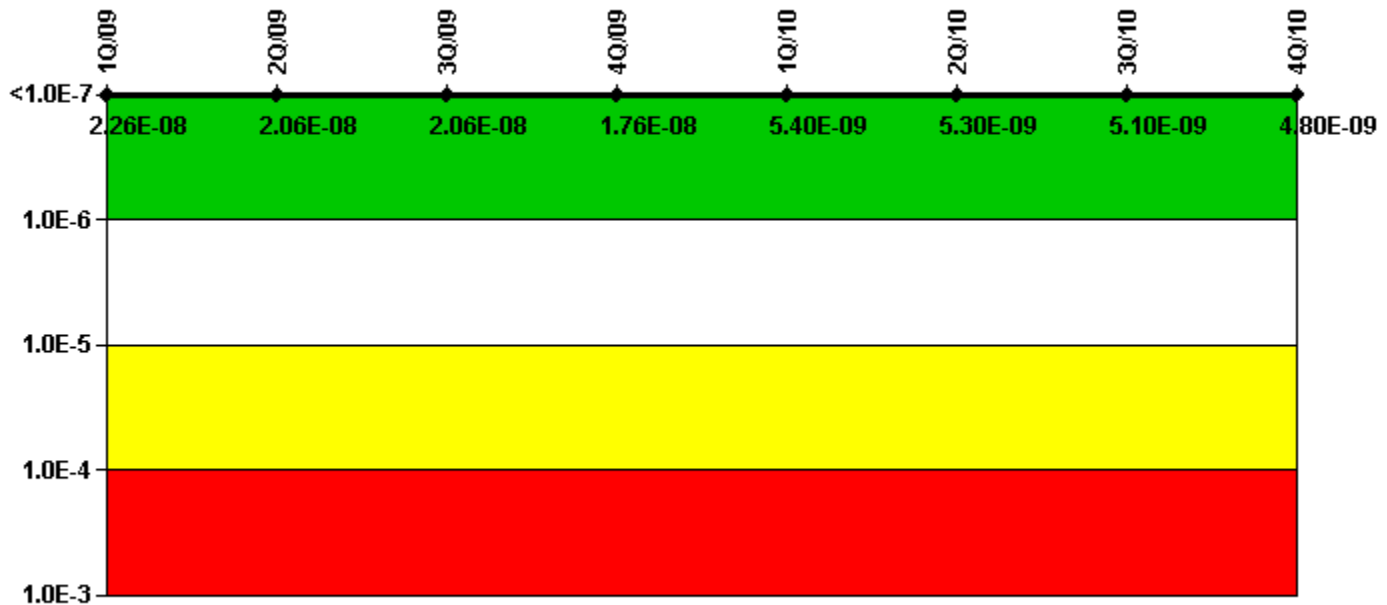


Thresholds: White > 1.00E-6 Yellow > 1.00E-5 Red > 1.00E-4

Notes

Mitigating Systems Performance Index, Residual Heat Removal System	1Q/09	2Q/09	3Q/09	4Q/09	1Q/10	2Q/10	3Q/10	4Q/10
UAI (Δ CDF)	2.30E-08	2.10E-08	2.10E-08	1.80E-08	5.42E-09	5.29E-09	5.13E-09	4.78E-09
URI (Δ CDF)	-4.40E-10	-4.40E-10	-4.40E-10	-4.40E-10	-1.20E-11	-1.23E-11	-1.24E-11	-1.24E-11
PLE	NO	NO	NO	NO	NO	NO	NO	NO
Indicator value	2.26E-08	2.06E-08	2.06E-08	1.76E-08	5.40E-09	5.30E-09	5.10E-09	4.80E-09

Licensee Comments: none

Mitigating Systems Performance Index, Cooling Water Systems

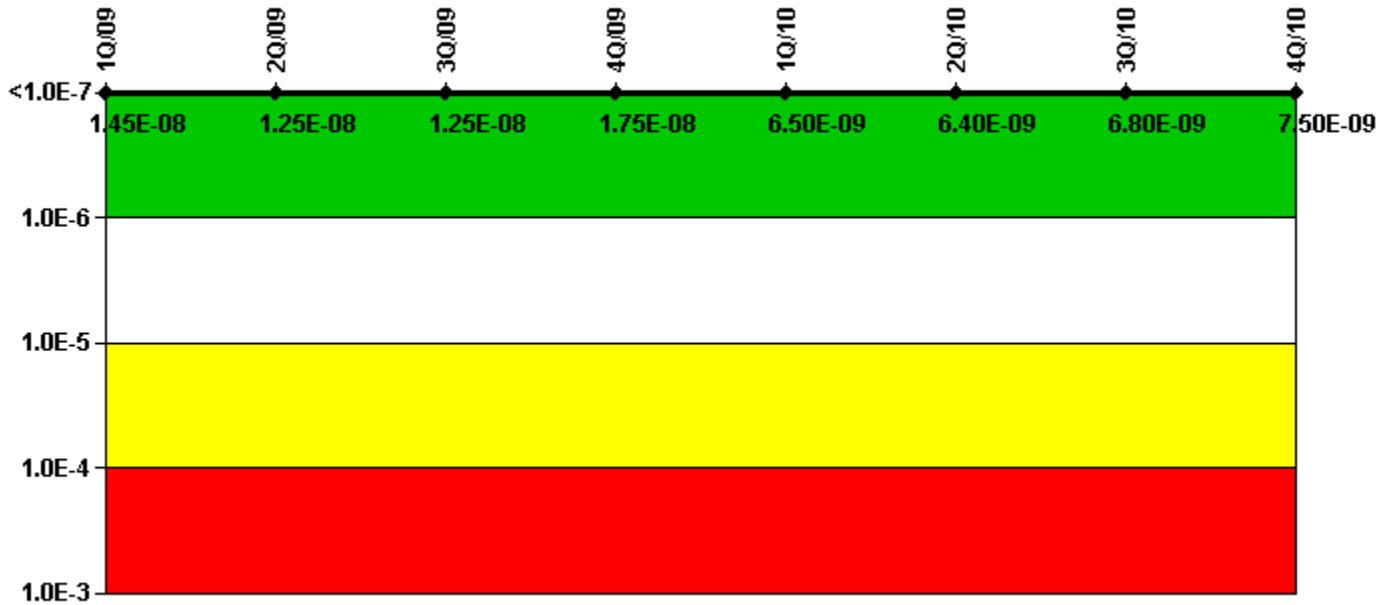


Thresholds: White > 1.00E-6 Yellow > 1.00E-5 Red > 1.00E-4

Notes

Mitigating Systems Performance Index, Cooling Water Systems	1Q/09	2Q/09	3Q/09	4Q/09	1Q/10	2Q/10	3Q/10	4Q/10
UAI (Δ CDF)	1.50E-08	1.30E-08	1.30E-08	1.80E-08	6.57E-09	6.44E-09	6.89E-09	7.53E-09
URI (Δ CDF)	-4.60E-10	-4.60E-10	-4.60E-10	-4.60E-10	-4.94E-11	-5.01E-11	-5.04E-11	-5.04E-11
PLE	NO	NO	NO	NO	NO	NO	NO	NO
Indicator value	1.45E-08	1.25E-08	1.25E-08	1.75E-08	6.50E-09	6.40E-09	6.80E-09	7.50E-09

Licensee Comments: none

Reactor Coolant System Activity

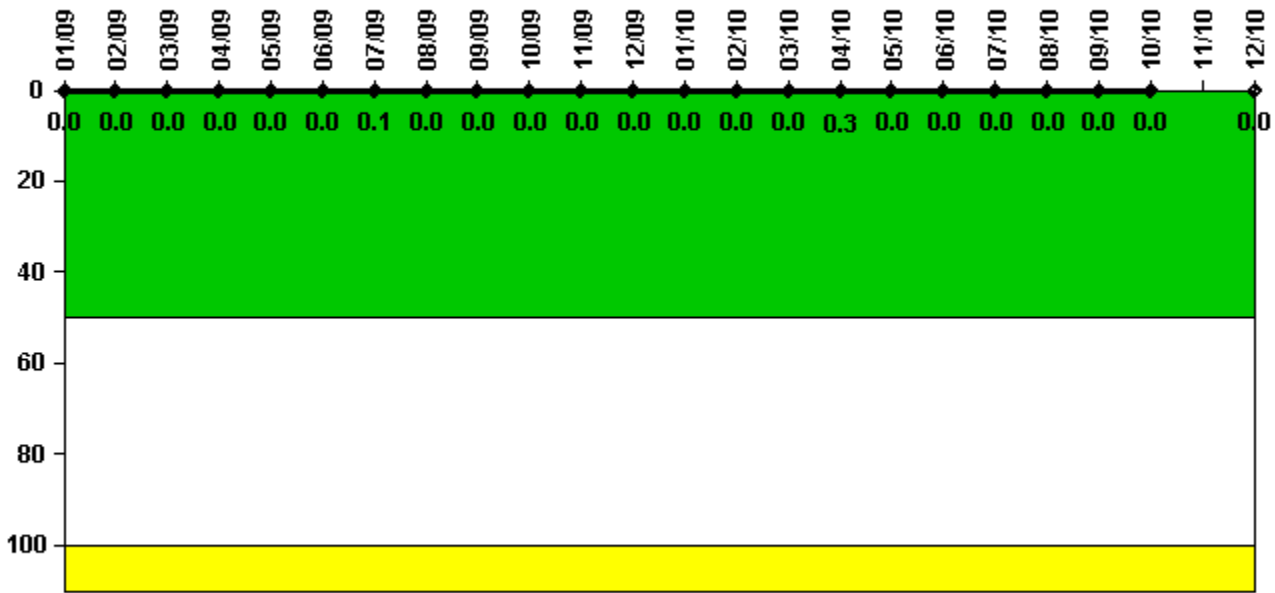


Thresholds: White > 50.0 Yellow > 100.0

Notes

Reactor Coolant System Activity	1/09	2/09	3/09	4/09	5/09	6/09	7/09	8/09	9/09	10/09	11/09	12/09
Maximum activity	0.000013	0.000030	0.000016	0.000017	0.000024	0.000016	0.000126	0.000053	0.000012	0.000012	0.000013	0.000019
Technical specification limit	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Indicator value	0	0	0	0	0	0	0.1	0	0	0	0	0
Reactor Coolant System Activity	1/10	2/10	3/10	4/10	5/10	6/10	7/10	8/10	9/10	10/10	11/10	12/10
Maximum activity	0.000014	0.000014	0.000027	0.000645	0.000083	0.000069	0.000016	0.000015	0.000030	0.000020	N/A	0.000089
Technical specification limit	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Indicator value	0	0	0	0.3	0	0	0	0	0	0	N/A	0

Licensee Comments: none

Reactor Coolant System Leakage

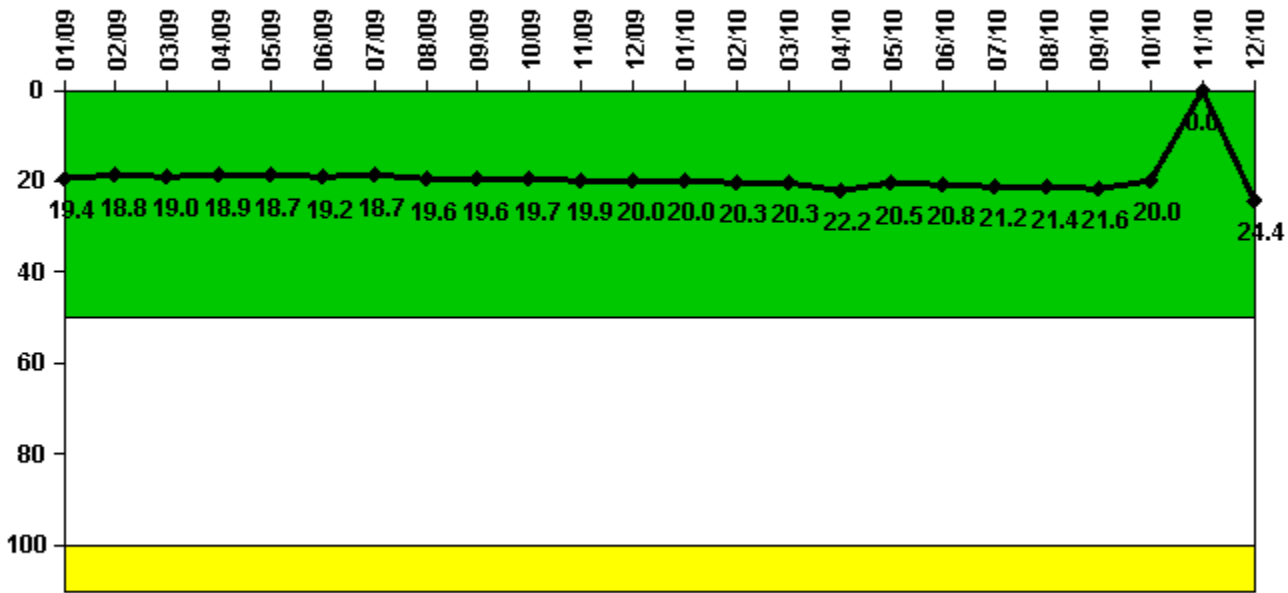


Thresholds: White > 50.0 Yellow > 100.0

Notes

Reactor Coolant System Leakage	1/09	2/09	3/09	4/09	5/09	6/09	7/09	8/09	9/09	10/09	11/09	12/09
Maximum leakage	4.860	4.690	4.760	4.720	4.670	4.810	4.680	4.910	4.890	4.930	4.980	5.000
Technical specification limit	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
Indicator value	19.4	18.8	19.0	18.9	18.7	19.2	18.7	19.6	19.6	19.7	19.9	20.0
Reactor Coolant System Leakage	1/10	2/10	3/10	4/10	5/10	6/10	7/10	8/10	9/10	10/10	11/10	12/10
Maximum leakage	5.010	5.070	5.080	5.540	5.120	5.200	5.310	5.360	5.400	5.010	0	6.090
Technical specification limit	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
Indicator value	20.0	20.3	20.3	22.2	20.5	20.8	21.2	21.4	21.6	20.0	0	24.4

Licensee Comments: none

Drill/Exercise Performance

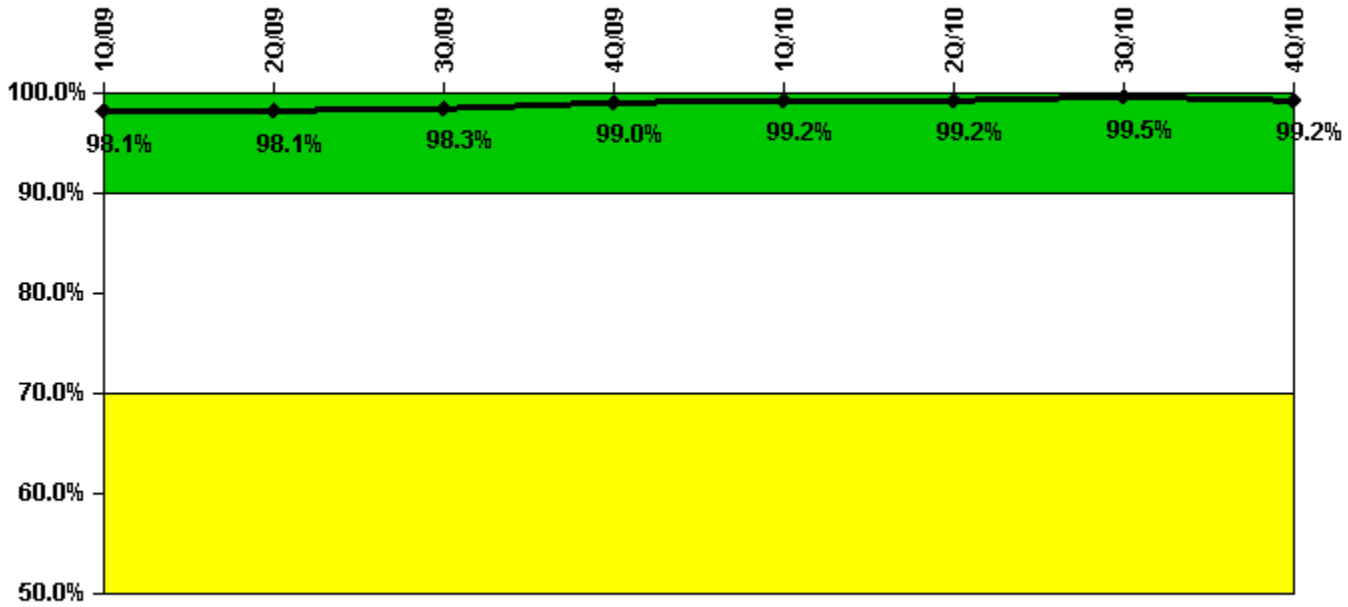


Thresholds: White < 90.0% Yellow < 70.0%

Notes

Drill/Exercise Performance	1Q/09	2Q/09	3Q/09	4Q/09	1Q/10	2Q/10	3Q/10	4Q/10
Successful opportunities	67.0	30.0	51.0	62.0	70.0	48.0	45.0	23.0
Total opportunities	67.0	30.0	52.0	62.0	70.0	48.0	46.0	24.0
Indicator value	98.1%	98.1%	98.3%	99.0%	99.2%	99.2%	99.5%	99.2%

License Comments: none

ERO Drill Participation

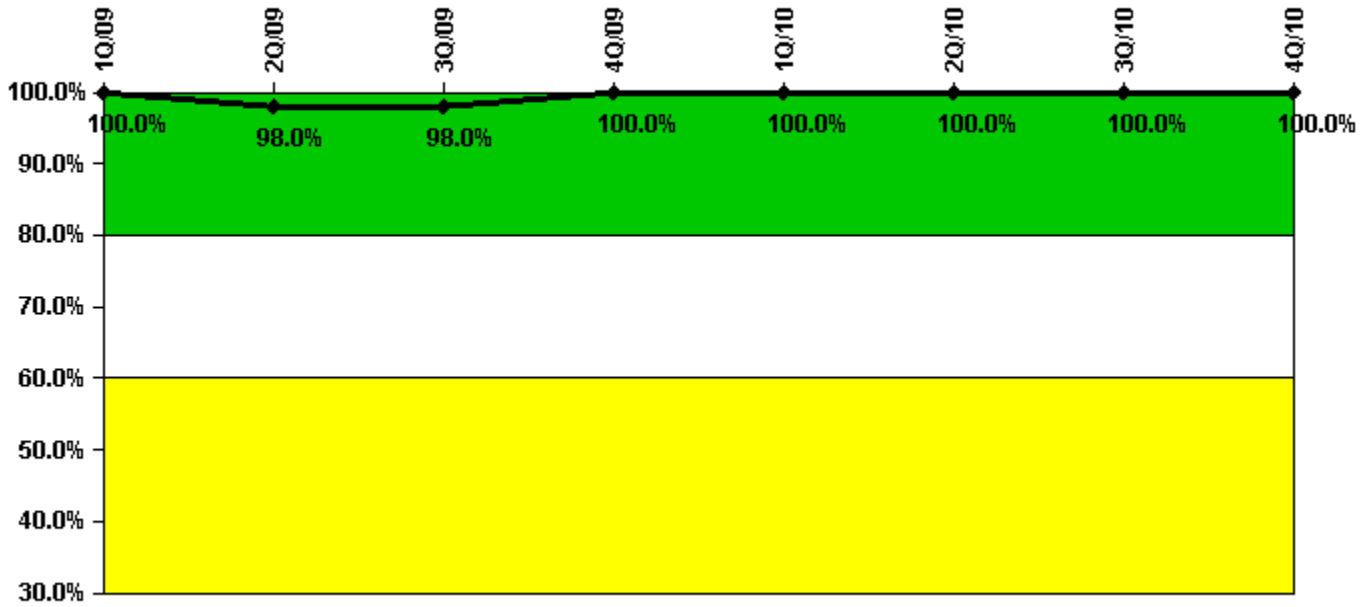


Thresholds: White < 80.0% Yellow < 60.0%

Notes

ERO Drill Participation	1Q/09	2Q/09	3Q/09	4Q/09	1Q/10	2Q/10	3Q/10	4Q/10
Participating Key personnel	51.0	49.0	50.0	56.0	55.0	61.0	61.0	61.0
Total Key personnel	51.0	50.0	51.0	56.0	55.0	61.0	61.0	61.0
Indicator value	100.0%	98.0%	98.0%	100.0%	100.0%	100.0%	100.0%	100.0%

Licensee Comments: none

Alert & Notification System

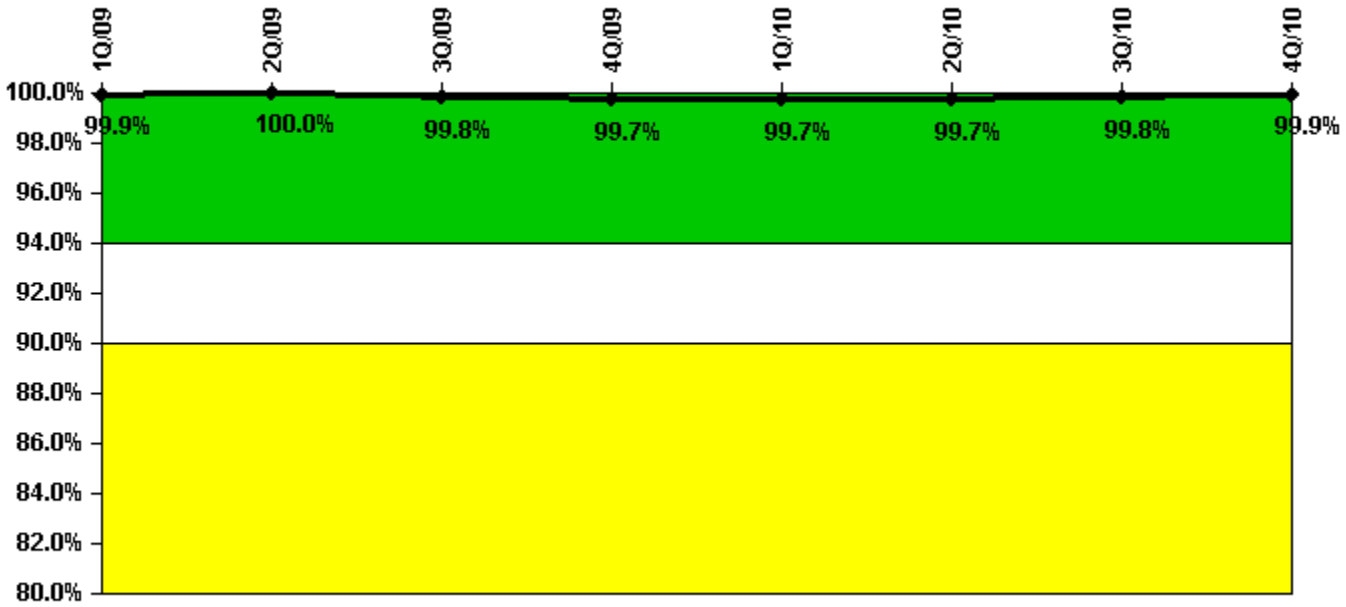

Thresholds: White < 94.0% Yellow < 90.0%

Notes

Alert & Notification System	1Q/09	2Q/09	3Q/09	4Q/09	1Q/10	2Q/10	3Q/10	4Q/10
Successful siren-tests	545	546	543	544	543	546	546	546
Total sirens-tests	546	546	546	546	545	546	546	546
Indicator value	99.9%	100.0%	99.8%	99.7%	99.7%	99.7%	99.8%	99.9%

Licensee Comments: none

Occupational Exposure Control Effectiveness



Thresholds: White > 2.0 Yellow > 5.0

Notes

Occupational Exposure Control Effectiveness	1Q/09	2Q/09	3Q/09	4Q/09	1Q/10	2Q/10	3Q/10	4Q/10
High radiation area occurrences	0	0	0	0	0	0	0	0
Very high radiation area occurrences	0	0	0	0	0	0	0	0
Unintended exposure occurrences	0	0	0	0	0	0	0	0
Indicator value	0	0	0	0	0	0	0	0

Licensee Comments: none

RETS/ODCM Radiological Effluent



Thresholds: White > 1.0 Yellow > 3.0

Notes

RETS/ODCM Radiological Effluent	1Q/09	2Q/09	3Q/09	4Q/09	1Q/10	2Q/10	3Q/10	4Q/10
RETS/ODCM occurrences	0	0	0	0	0	0	0	0
Indicator value	0	0	0	0	0	0	0	0

Licensee Comments: none

[Security](#) information not publicly available.