


# Oyster Creek

## 1Q/2016 Performance Indicators

The solid trend line represents the current reporting period.

Licensee's General Comments: none

### Unplanned Scrams per 7000 Critical Hrs

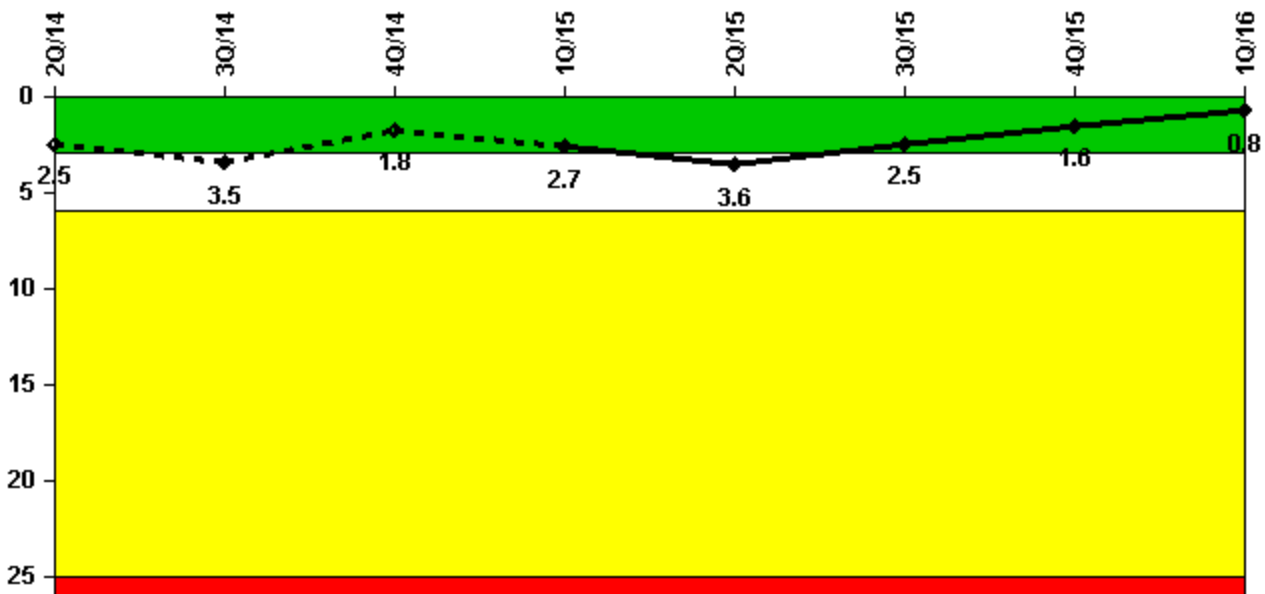


Thresholds: White > 3.0 Yellow > 6.0 Red > 25.0

### Notes

Unplanned Scrams per 7000 Critical Hrs	2Q/14	3Q/14	4Q/14	1Q/15	2Q/15	3Q/15	4Q/15	1Q/16
Unplanned scrams	0	1.0	1.0	1.0	1.0	0	0	0
Critical hours	2184.0	1717.3	1925.8	2070.8	2069.9	2208.0	2209.0	2183.0
Indicator value	<b>2.5</b>	<b>3.5</b>	<b>1.8</b>	<b>2.7</b>	<b>3.6</b>	<b>2.5</b>	<b>1.6</b>	<b>0.8</b>

Licensee Comments: none

### Unplanned Power Changes per 7000 Critical Hrs

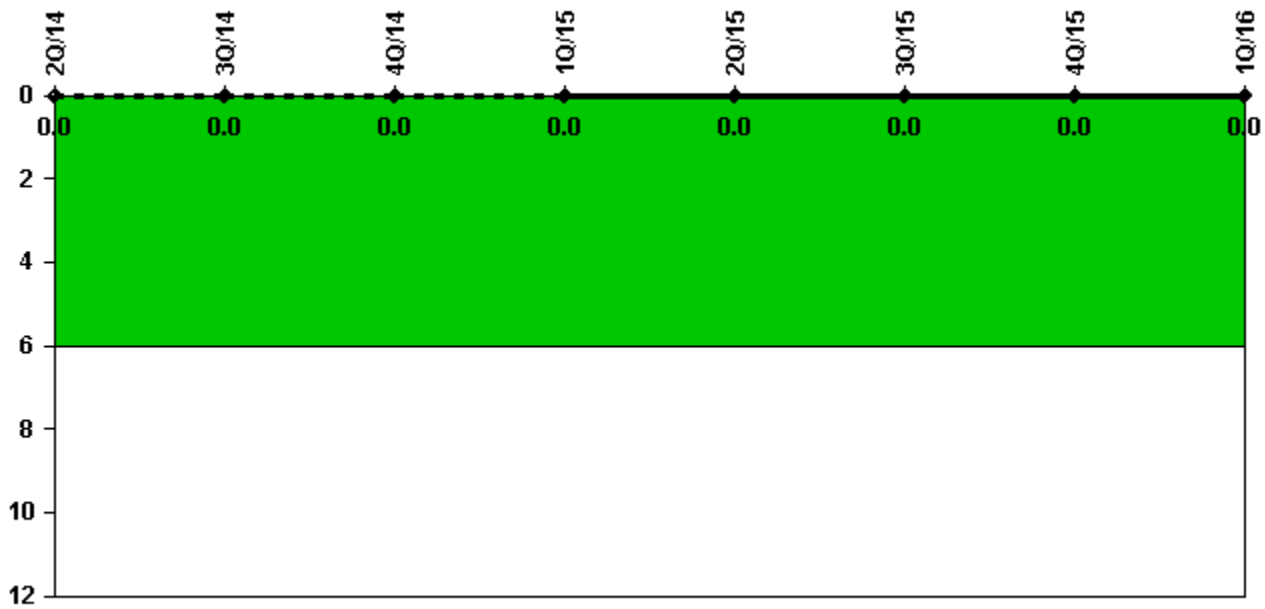


Thresholds: White > 6.0

#### Notes

Unplanned Power Changes per 7000 Critical Hrs	2Q/14	3Q/14	4Q/14	1Q/15	2Q/15	3Q/15	4Q/15	1Q/16
Unplanned power changes	0	0	0	0	0	0	0	0
Critical hours	2184.0	1717.3	1925.8	2070.8	2069.9	2208.0	2209.0	2183.0
<b>Indicator value</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>

Licensee Comments: none

### Unplanned Scrams with Complications

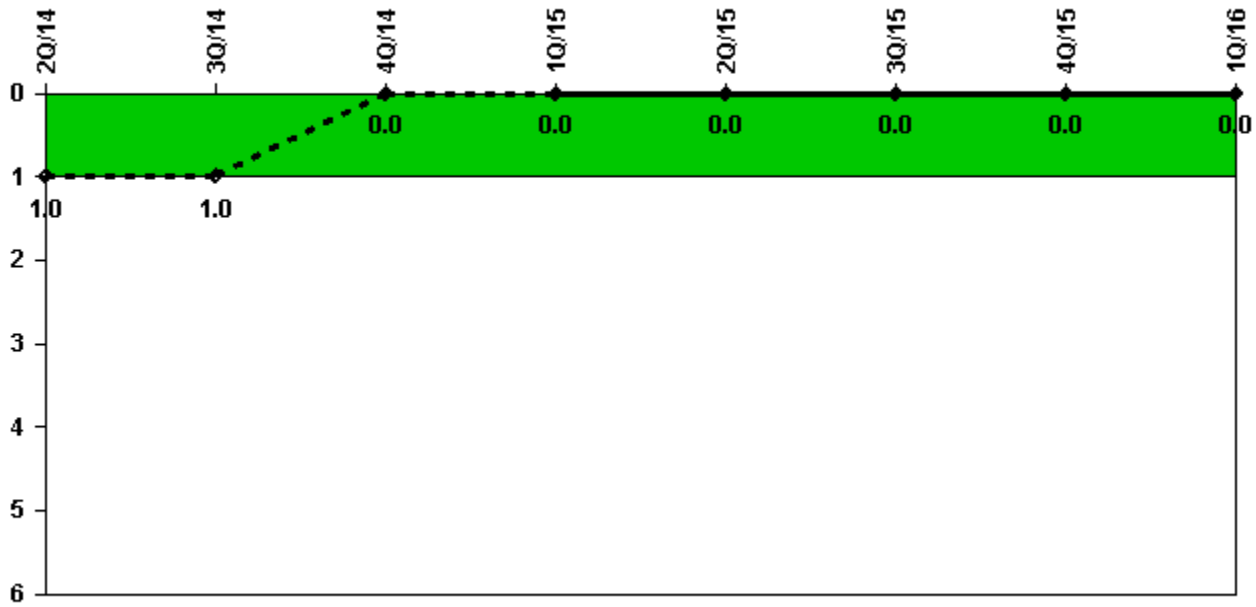


Thresholds: White > 1.0

#### Notes

Unplanned Scrams with Complications	2Q/14	3Q/14	4Q/14	1Q/15	2Q/15	3Q/15	4Q/15	1Q/16
Scrams with complications	0	0	0	0	0	0	0	0
Indicator value	1.0	1.0	0.0	0.0	0.0	0.0	0.0	0.0

Licensee Comments: none

### Safety System Functional Failures (BWR)

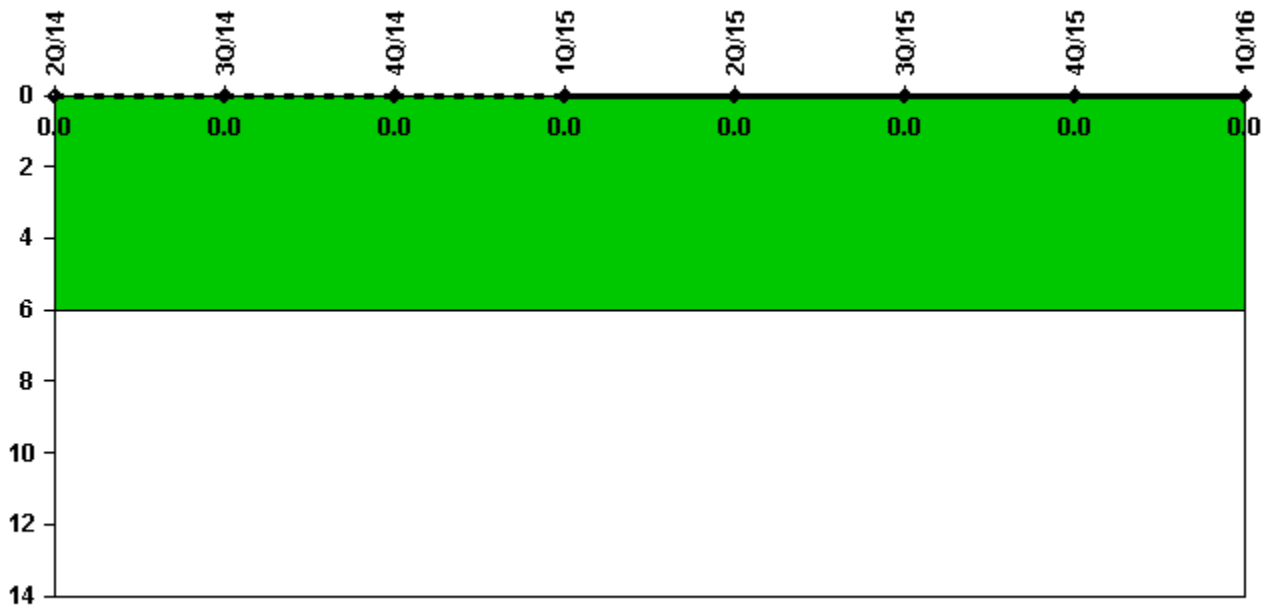


Thresholds: White > 6.0

#### Notes

Safety System Functional Failures (BWR)	2Q/14	3Q/14	4Q/14	1Q/15	2Q/15	3Q/15	4Q/15	1Q/16
Safety System Functional Failures	0	0	0	0	0	0	0	0
<b>Indicator value</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>

Licensee Comments: none

### Mitigating Systems Performance Index, Emergency AC Power System

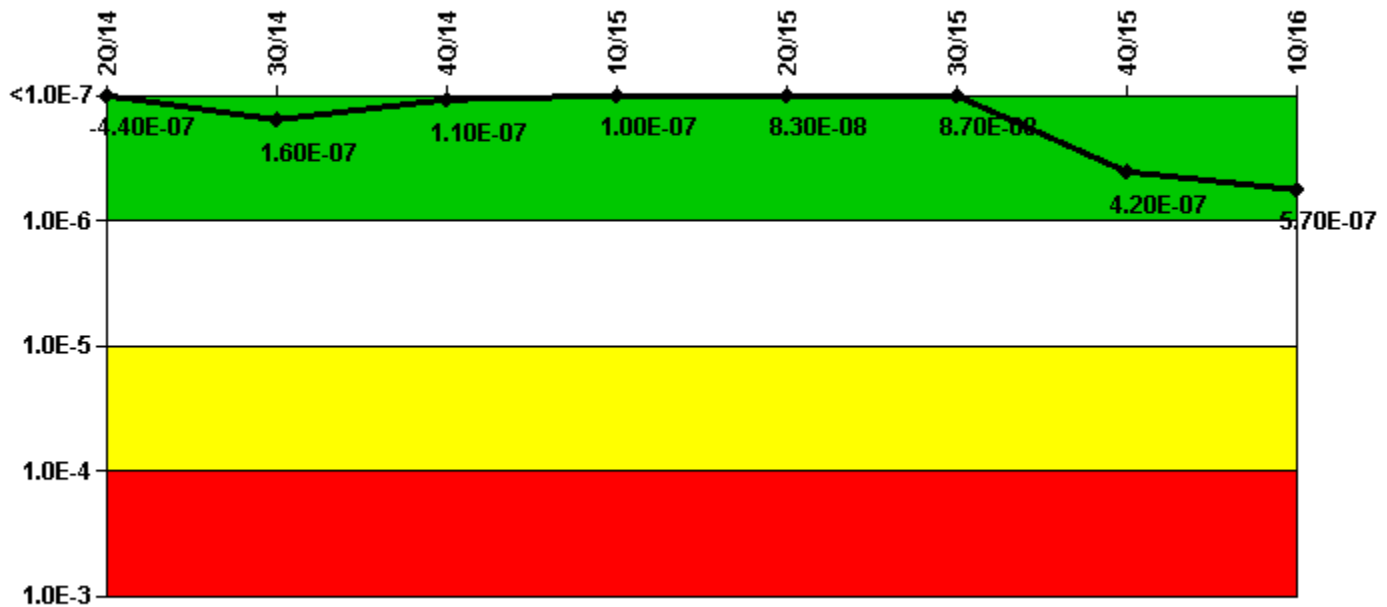

Thresholds: White > 1.00E-6 Yellow > 1.00E-5 Red > 1.00E-4


#### Notes

Mitigating Systems Performance Index, Emergency AC Power System	2Q/14	3Q/14	4Q/14	1Q/15	2Q/15	3Q/15	4Q/15	1Q/16
UAI ( $\Delta$ CDF)	5.43E-08	7.97E-08	1.93E-08	9.10E-09	-9.89E-09	-9.92E-09	1.26E-07	1.46E-07
URI ( $\Delta$ CDF)	-4.97E-07	7.97E-08	9.19E-08	9.21E-08	9.33E-08	9.71E-08	2.90E-07	4.24E-07
PLE	NO	NO	NO	NO	NO	NO	NO	NO
Indicator value	-4.40E-07	1.60E-07	1.10E-07	1.00E-07	8.30E-08	8.70E-08	4.20E-07	5.70E-07

Licensee Comments:

3Q/14: Changed PRA Parameter(s).

### Mitigating Systems Performance Index, High Pressure Injection System

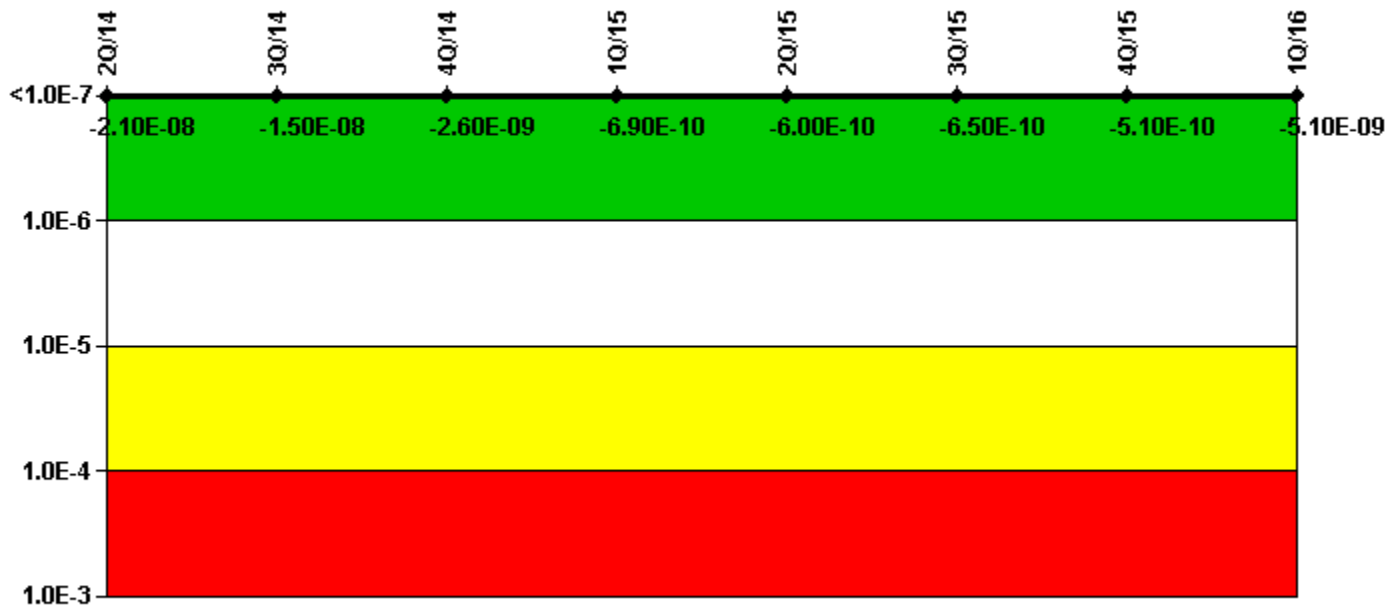

Thresholds: White > 1.00E-6 Yellow > 1.00E-5 Red > 1.00E-4


#### Notes

Mitigating Systems Performance Index, High Pressure Injection System	2Q/14	3Q/14	4Q/14	1Q/15	2Q/15	3Q/15	4Q/15	1Q/16
UAI ( $\Delta$ CDF)	-2.00E-08	-2.19E-08	-9.83E-09	-7.92E-09	-7.83E-09	-7.95E-09	-7.81E-09	-1.24E-08
URI ( $\Delta$ CDF)	-1.19E-09	7.23E-09	7.23E-09	7.23E-09	7.22E-09	7.30E-09	7.30E-09	7.30E-09
PLE	NO	NO	NO	NO	NO	NO	NO	NO
Indicator value	-2.10E-08	-1.50E-08	-2.60E-09	-6.90E-10	-6.00E-10	-6.50E-10	-5.10E-10	-5.10E-09

Licensee Comments:

3Q/14: Changed PRA Parameter(s).

### Mitigating Systems Performance Index, Heat Removal System

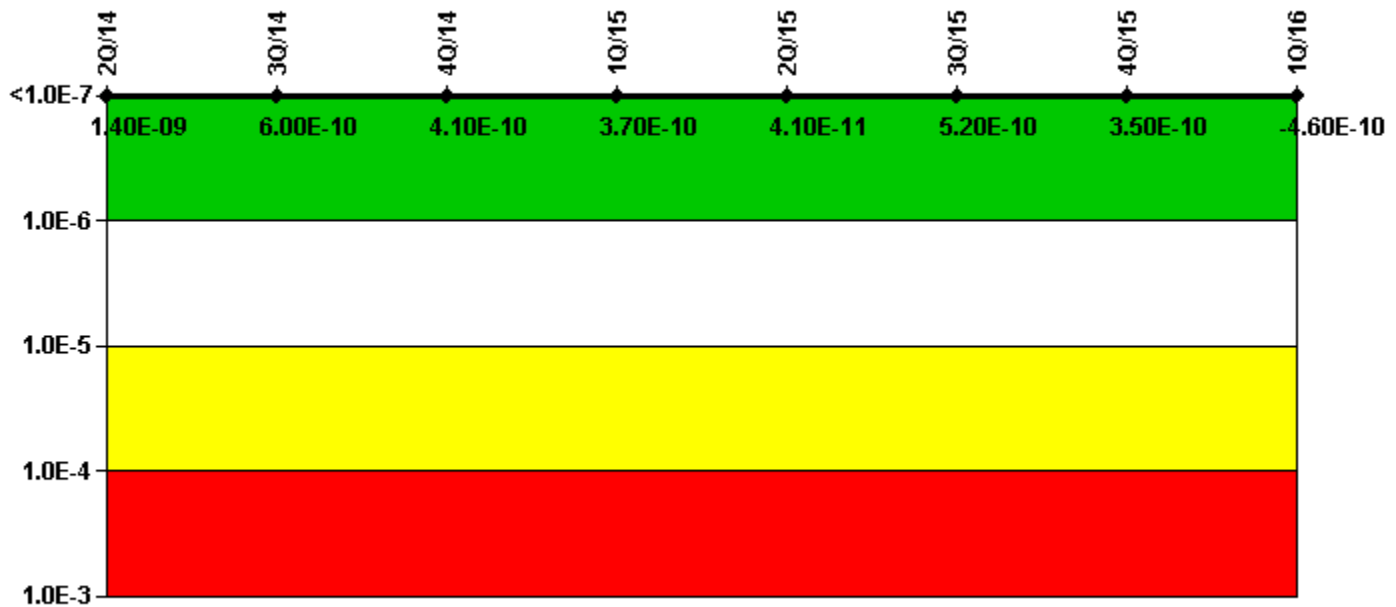

Thresholds: White > 1.00E-6 Yellow > 1.00E-5 Red > 1.00E-4


#### Notes

Mitigating Systems Performance Index, Heat Removal System	2Q/14	3Q/14	4Q/14	1Q/15	2Q/15	3Q/15	4Q/15	1Q/16
UAI ( $\Delta$ CDF)	1.49E-09	8.19E-10	6.27E-10	5.93E-10	2.58E-10	5.89E-10	4.10E-10	-3.98E-10
URI ( $\Delta$ CDF)	-9.89E-11	-2.19E-10	-2.17E-10	-2.19E-10	-2.17E-10	-6.38E-11	-6.16E-11	-5.71E-11
PLE	NO	NO	NO	NO	NO	NO	NO	NO
Indicator value	1.40E-09	6.00E-10	4.10E-10	3.70E-10	4.10E-11	5.20E-10	3.50E-10	-4.60E-10

Licensee Comments:

3Q/14: Changed PRA Parameter(s).

### Mitigating Systems Performance Index, Residual Heat Removal System

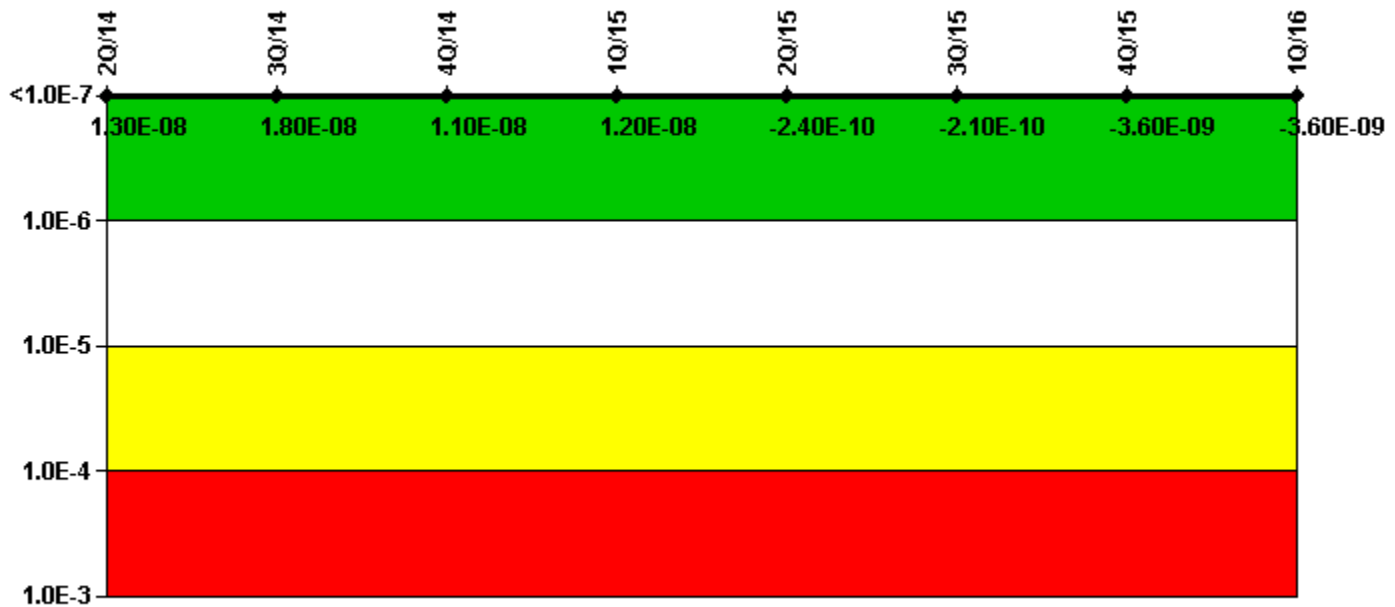

Thresholds: White > 1.00E-6 Yellow > 1.00E-5 Red > 1.00E-4

#### Notes


Mitigating Systems Performance Index, Residual Heat Removal System	2Q/14	3Q/14	4Q/14	1Q/15	2Q/15	3Q/15	4Q/15	1Q/16
UAI ( $\Delta$ CDF)	1.34E-08	1.84E-08	1.15E-08	1.26E-08	-1.34E-10	-1.00E-10	-3.54E-09	-3.54E-09
URI ( $\Delta$ CDF)	-1.38E-11	-1.07E-10	-1.06E-10	-1.06E-10	-1.05E-10	-1.07E-10	-1.07E-10	-1.08E-10
PLE	NO	NO	NO	NO	NO	NO	NO	NO
Indicator value	1.30E-08	1.80E-08	1.10E-08	1.20E-08	-2.40E-10	-2.10E-10	-3.60E-09	-3.60E-09

Licensee Comments:

3Q/14: Changed PRA Parameter(s).



### Mitigating Systems Performance Index, Cooling Water Systems

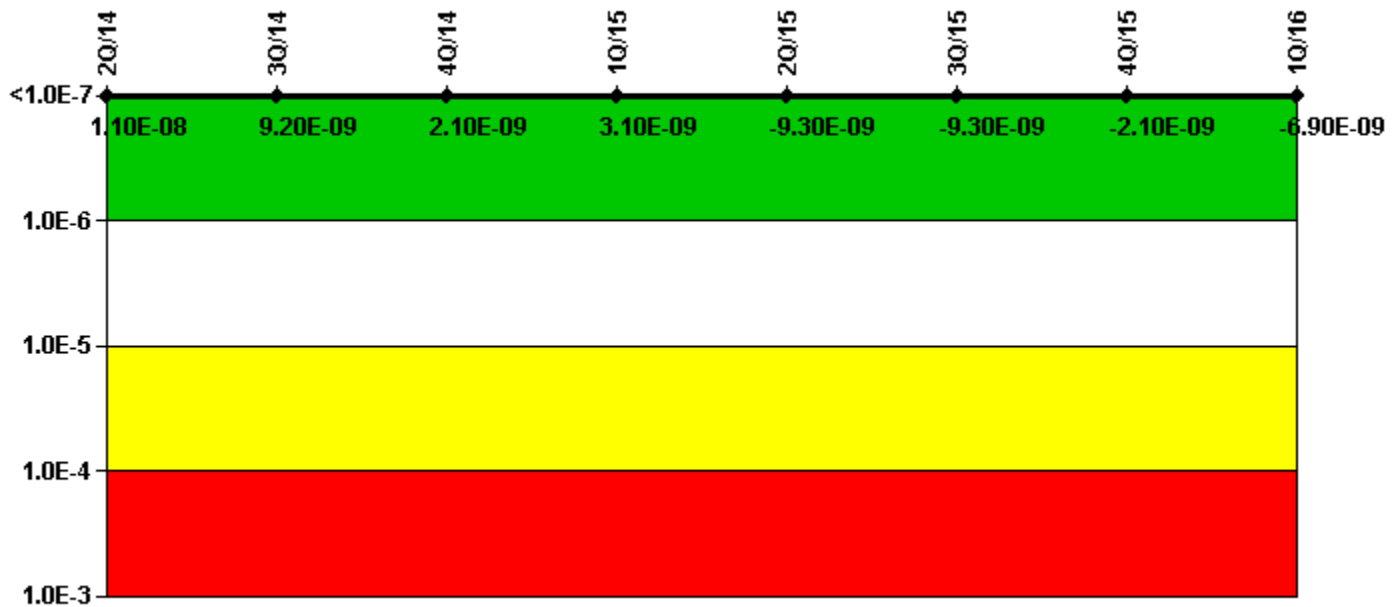

Thresholds: White > 1.00E-6 Yellow > 1.00E-5 Red > 1.00E-4


#### Notes

Mitigating Systems Performance Index, Cooling Water Systems	2Q/14	3Q/14	4Q/14	1Q/15	2Q/15	3Q/15	4Q/15	1Q/16
UAI ( $\Delta$ CDF)	1.09E-08	8.82E-09	1.70E-09	2.69E-09	-9.70E-09	-9.70E-09	-2.52E-09	-7.34E-09
URI ( $\Delta$ CDF)	1.05E-10	4.14E-10	4.12E-10	4.08E-10	4.10E-10	4.01E-10	3.95E-10	3.98E-10
PLE	NO	NO	NO	NO	NO	NO	NO	NO
Indicator value	1.10E-08	9.20E-09	2.10E-09	3.10E-09	-9.30E-09	-9.30E-09	-2.10E-09	-6.90E-09

Licensee Comments:

3Q/14: Changed PRA Parameter(s).

### Reactor Coolant System Activity

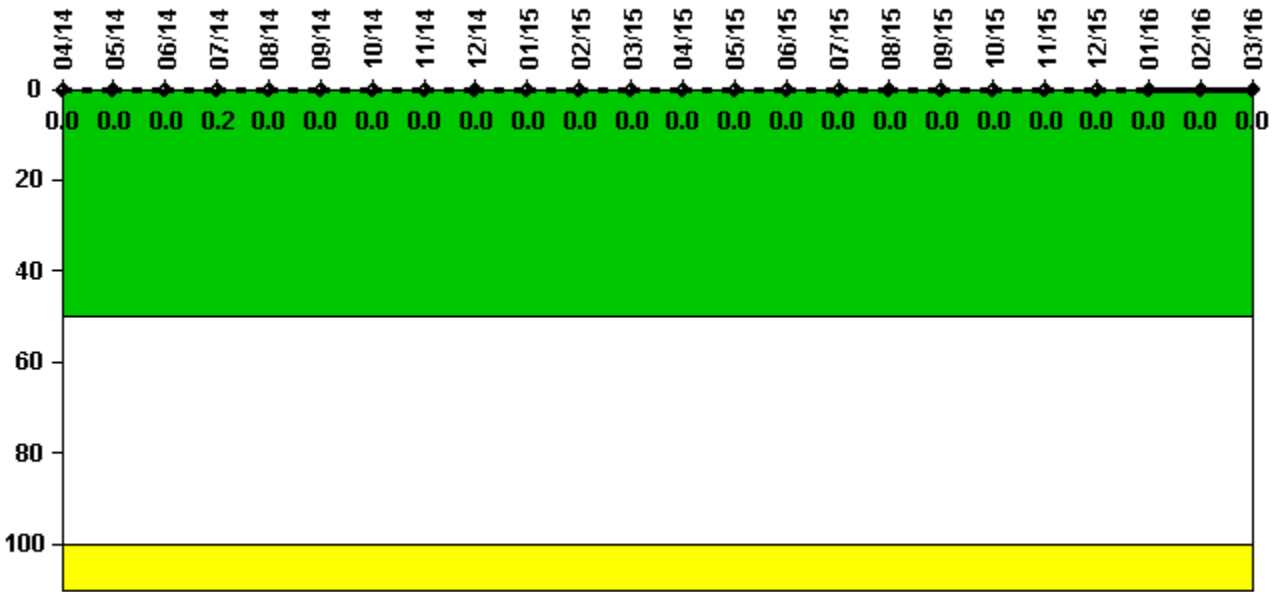

Thresholds: White > 50.0 Yellow > 100.0

#### Notes


Reactor Coolant System Activity	4/14	5/14	6/14	7/14	8/14	9/14	10/14	11/14	12/14	1/15	2/15	3/15
Maximum activity	0.000021	0.000016	0.000017	0.000384	0.000015	0.000009	0.000007	0.000005	0.000007	0.000006	0.000005	0.000007
Technical specification limit	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Indicator value	0	0	0	0.2	0	0	0	0	0	0	0	0

Reactor Coolant System Activity	4/15	5/15	6/15	7/15	8/15	9/15	10/15	11/15	12/15	1/16	2/16	3/16
Maximum activity	0.000006	0.000007	0.000005	0.000006	0.000005	0.000006	0.000005	0.000097	0.000007	0.000007	0.000010	0.000020
Technical specification limit	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Indicator value	0	0	0	0	0	0	0	0	0	0	0	0

Licensee Comments: none

### Reactor Coolant System Leakage

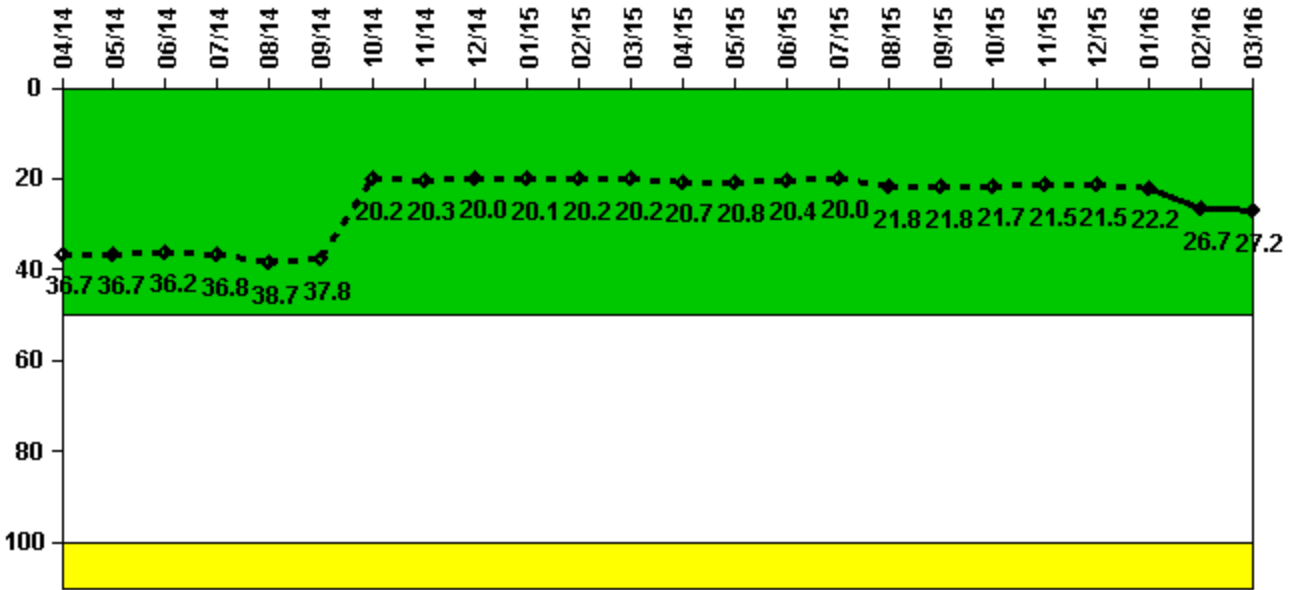

Thresholds: White > 50.0 Yellow > 100.0

#### Notes


Reactor Coolant System Leakage	4/14	5/14	6/14	7/14	8/14	9/14	10/14	11/14	12/14	1/15	2/15	3/15
Maximum leakage	9.180	9.170	9.040	9.190	9.680	9.450	5.040	5.080	5.000	5.020	5.060	5.050
Technical specification limit	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
Indicator value	36.7	36.7	36.2	36.8	38.7	37.8	20.2	20.3	20.0	20.1	20.2	20.2

Reactor Coolant System Leakage	4/15	5/15	6/15	7/15	8/15	9/15	10/15	11/15	12/15	1/16	2/16	3/16
Maximum leakage	5.180	5.190	5.100	4.990	5.440	5.460	5.420	5.370	5.380	5.550	6.680	6.800
Technical specification limit	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
Indicator value	20.7	20.8	20.4	20.0	21.8	21.8	21.7	21.5	21.5	22.2	26.7	27.2

Licensee Comments: none

### Drill/Exercise Performance

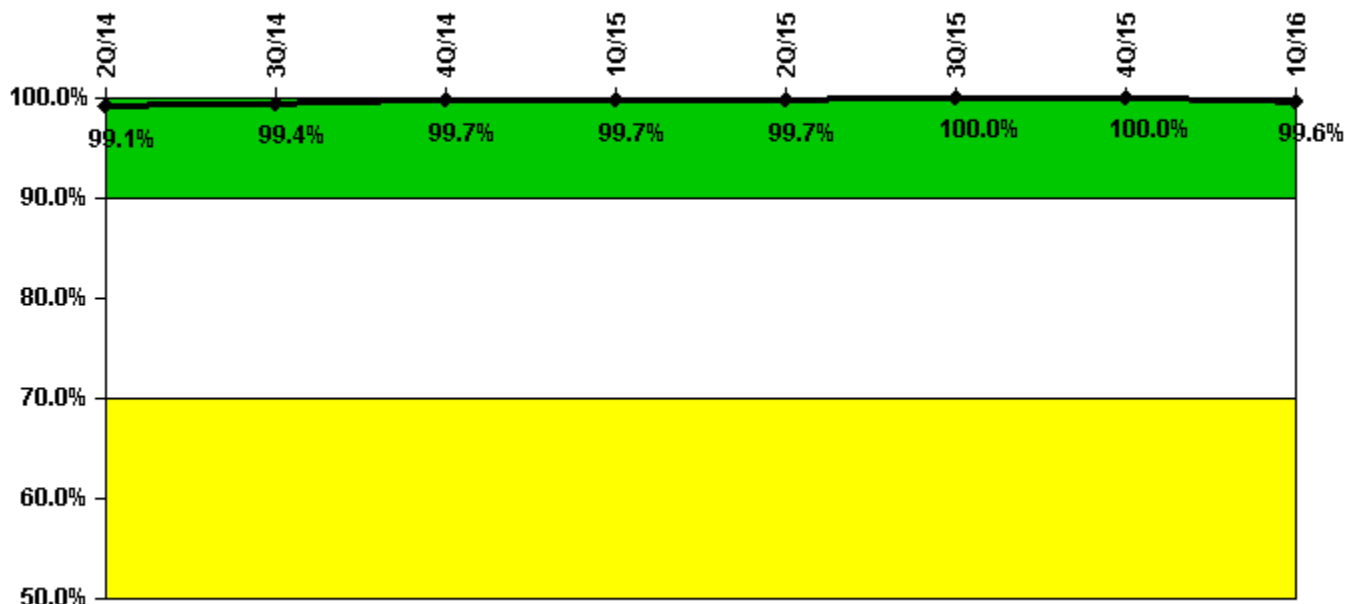


Thresholds: White < 90.0% Yellow < 70.0%

#### Notes

Drill/Exercise Performance	2Q/14	3Q/14	4Q/14	1Q/15	2Q/15	3Q/15	4Q/15	1Q/16
Successful opportunities	46.0	18.0	8.0	56.0	38.0	32.0	8.0	47.0
Total opportunities	46.0	18.0	8.0	56.0	38.0	32.0	8.0	48.0
Indicator value	99.1%	99.4%	99.7%	99.7%	99.7%	100.0%	100.0%	99.6%

Licensee Comments: none

### ERO Drill Participation

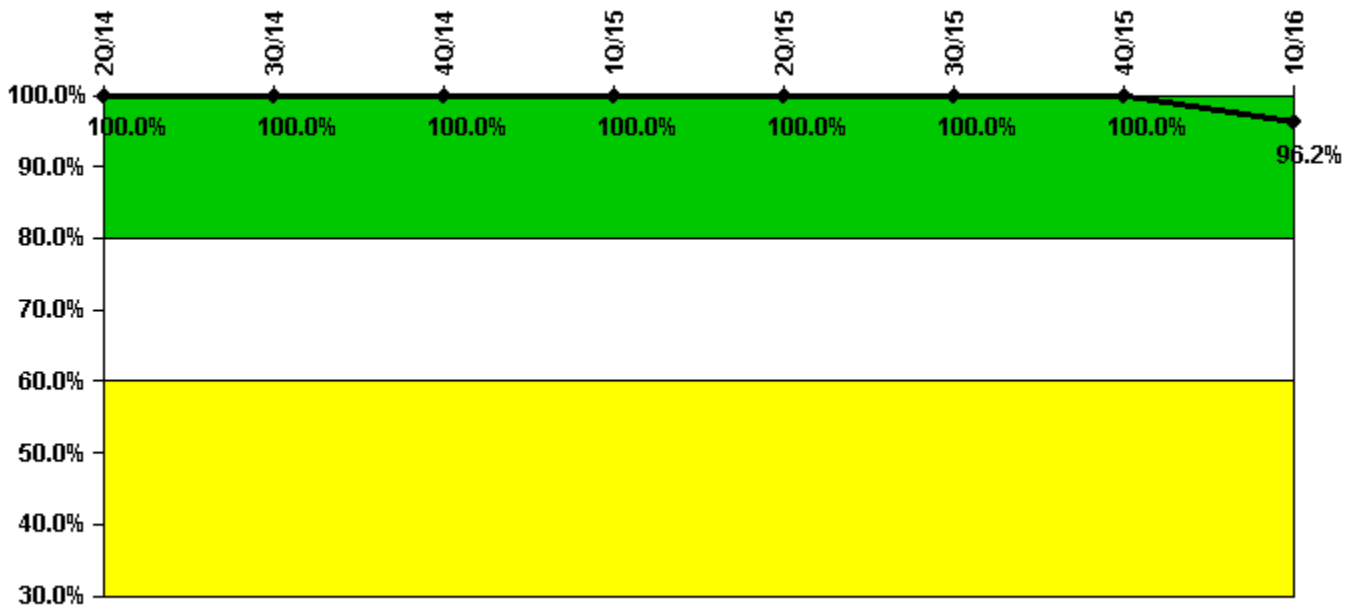


Thresholds: White < 80.0% Yellow < 60.0%

#### Notes

ERO Drill Participation	2Q/14	3Q/14	4Q/14	1Q/15	2Q/15	3Q/15	4Q/15	1Q/16
Participating Key personnel	60.0	58.0	54.0	54.0	52.0	53.0	53.0	51.0
Total Key personnel	60.0	58.0	54.0	54.0	52.0	53.0	53.0	53.0
Indicator value	100.0%	100.0%	100.0%	100.0%	100.0%	100.0%	100.0%	96.2%

Licensee Comments: none

### Alert & Notification System

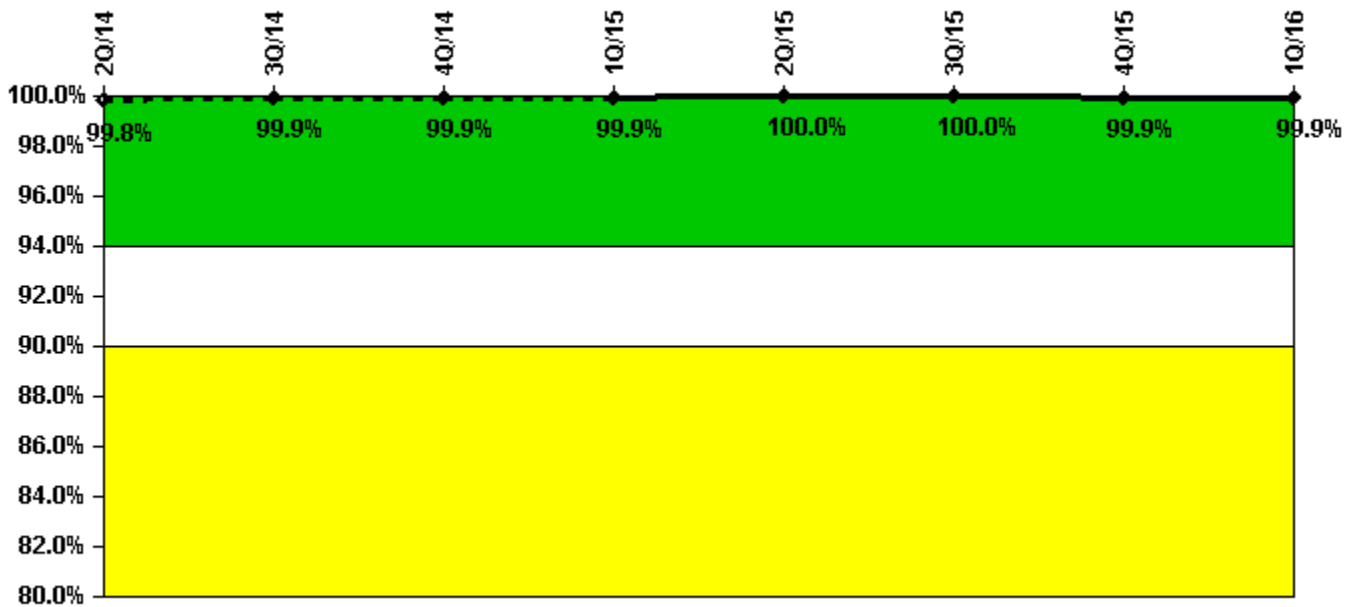


Thresholds: White < 94.0% Yellow < 90.0%

#### Notes

Alert & Notification System	2Q/14	3Q/14	4Q/14	1Q/15	2Q/15	3Q/15	4Q/15	1Q/16
Successful siren-tests	544	588	546	545	546	546	544	546
Total sirens-tests	546	588	546	546	546	546	546	546
Indicator value	99.8%	99.9%	99.9%	99.9%	100.0%	100.0%	99.9%	99.9%

Licensee Comments: none

### Occupational Exposure Control Effectiveness

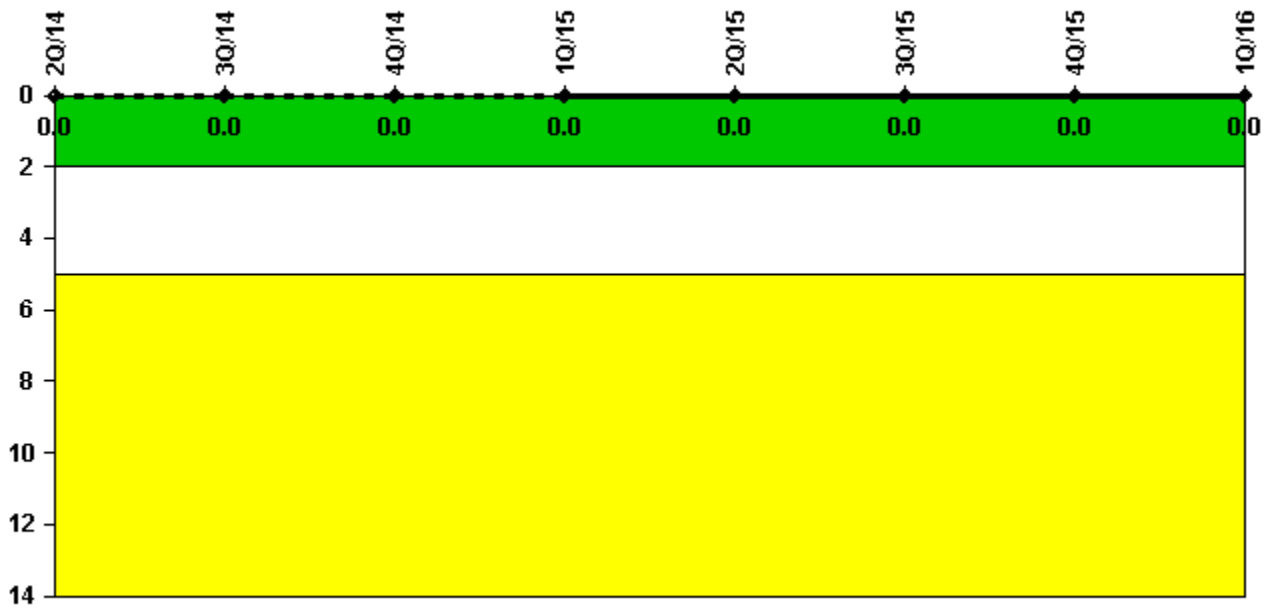


Thresholds: White > 2.0 Yellow > 5.0

#### Notes

Occupational Exposure Control Effectiveness	2Q/14	3Q/14	4Q/14	1Q/15	2Q/15	3Q/15	4Q/15	1Q/16
High radiation area occurrences	0	0	0	0	0	0	0	0
Very high radiation area occurrences	0	0	0	0	0	0	0	0
Unintended exposure occurrences	0	0	0	0	0	0	0	0
<b>Indicator value</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>

Licensee Comments: none

### RETS/ODCM Radiological Effluent

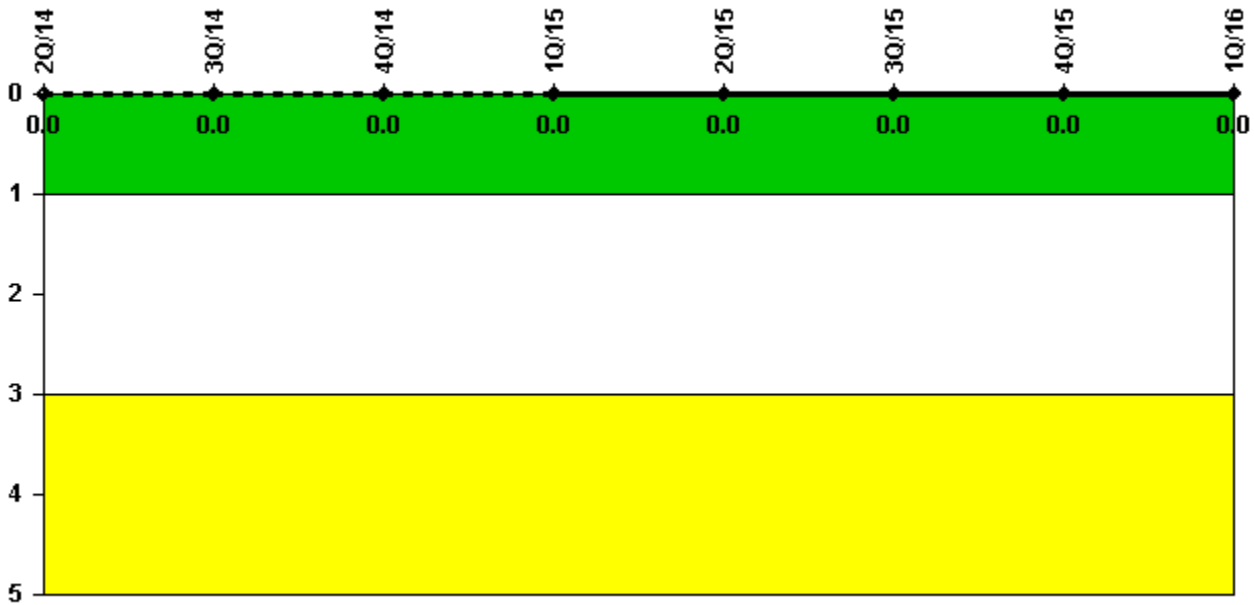

Thresholds: White > 1.0 Yellow > 3.0

#### Notes

RETS/ODCM Radiological Effluent	2Q/14	3Q/14	4Q/14	1Q/15	2Q/15	3Q/15	4Q/15	1Q/16
RETS/ODCM occurrences	0	0	0	0	0	0	0	0
Indicator value	0	0	0	0	0	0	0	0

Licensee Comments: none

Although the Security Cornerstone is included in the Reactor Oversight Process assessment program, the Commission has decided that specific information related to findings and performance indicators pertaining to the Security Cornerstone will not be publicly available to ensure that security information is not provided to a possible adversary. Other than the fact that a finding or performance indicator is Green or Greater-Than-Green, security related information will not be displayed on the public web page.



▲ [Action Matrix Summary](#) | [Inspection Findings Summary](#) | [PI Summary](#) | [Reactor Oversight Process](#)

*Last Modified: April 23, 2016*